

THE MICRO USER

Volume 5
Number 9
November 1987
£1.25

Top-selling
guide to the
BBC Micro!

BODY BUILDING

Interfacing with
digital displays

COMMS

Exploring Britain's
top bulletin board

HAC MAN

Cholo: full solution
to Firebird's classic

GAME

Jump aboard the
deadly Dune Flier

UTILITIES

Super pixel editor
Multi-column lister

CEEFAX

Complete guide to
free telesoftware

REVIEWS

- C compilers
- SPX colour board
- Romboard 4
- ... plus all the
latest software




EXCLUSIVE

**David Braben tells how
he wrote the epic that
is creating a revolution
in games programming**


PALACE of MAGIC




Leaping over deadly
swords and spikes



Climbing up the
East Tower




Wandering through
a patch of woodland

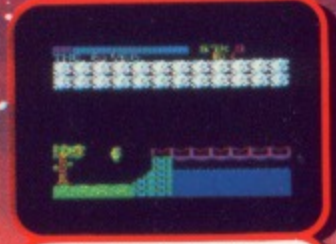

Approaching the
meandering river



At the top of
the West Tower



Exploring the passages



Greeting the Guardian
of the Guards



Down in the dungeons



Over 100 Screens full of Challenging Puzzles and Awesome Foes

By practising acts of benevolence and goodwill, you have offended the evil wizard Caldeti. Summoning forth his satanic powers in order to extract retribution, he has cast two powerful spells upon you: (1) you have been reduced to the size of a dwarf; (2) Caldeti has banished you to one of his old homes, the "Palace of Magic".

The palace and its surrounding land is littered with magical objects and mysterious creatures. It is rumoured that there is also a hidden transporter — your only means of escape from this enchanted place.

After exploring the rooms of the palace, you should venture forth through the enclosing woodland: towards the ancient church and the eerie dungeons, or through the maze of secret passages, or over the river to the princess's house.

On your journeys, you will encounter many strange animals and people including rock monsters, gremlins, imps and guards. Some are good and some are evil. You will need to decide who you can trust to help you in this arduous quest.

| | | | |
|-------------------------------|--------|------------------------------|--------|
| BBC Micro Cassette..... | £9.95 | Acorn Electron Cassette..... | £9.95 |
| BBC Micro 5¼" Disc..... | £11.95 | Acorn Electron 5¼" Disc..... | £11.95 |
| BBC Master Compact 3½" Disc.. | £14.95 | Acorn Electron 3½" Disc..... | £14.95 |

(Compatible with the BBC B, B+ and Master Series computers).

PRIZE COMPETITION

The first prize in our competition is a treasure chest containing over £200 worth of mystical and magical artefacts. 10 runners-up will each receive £5 and a signed certificate.

To enter the competition, you must complete the "Palace of Magic" adventure, and note down the congratulatory message you receive. Closing Date: 30th April, 1988.

**SUPERIOR
SOFTWARE**
Limited

ACORNSOFT

Please make
all cheques
payable to
"Superior
Software Ltd".



24 HOUR TELEPHONE
ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

(This does not affect your statutory rights)

THE NEW AMX MK. III MOUSE. TRAP ONE SOON.



The MK III AMX Mouse is a product of Swiss precision and the result of a world-wide search to find a worthy successor to the AMX Mouse MK II.

The new Mouse has been specifically chosen to be the perfect partner to the ever expanding range of AMX software. The unique patented design includes high resolution D.P.I. and superior ball technology to ensure that contact between the Mouse and the surface is constant at all times.

There's a new shape too, that fits comfortably in the hand.

The AMX Mouse MK III costs only £34.99 or you can join the great "Mouse-Swap". Part exchange your old Mouse for the MK III for only £29.99.



*SUPERART

AMX MOUSE MK III PLUS SUPERART 16K ROM, PLUS DISC £79.99

Acknowledged as the most sophisticated, yet easy to use paint package available for the BBC Micro, it's no wonder over 20,000 have already been sold.

'Superart' features include cut, copy, paste, move, rotate, plus many, many more such as fantastic spray and zoom facilities.

Available for BBC B, B+; Master 128, and Master Compact. Please state which version is required when ordering.

SUPERART (ONLY) £49.99

PICTURE GALLERY 2 x FLIPPY DISC £24.99

Instant art! A collection of fine drawings produced by acclaimed artists using superart.

*STOP PRESS

AMX MOUSE PLUS STOP PRESS 2x16K ROM, 2xDISC £79.99

The most highly acclaimed desktop publishing software available for the BBC Micro. Already thousands of users are producing professional documents, newsletters, flyposters etc. in fact anything where text and graphics are required.

'Stop Press' comes complete with 16 variable typefaces.

Available for the BBC, B+ and Master 128. Please state which version is required when ordering.

STOP PRESS (ONLY) £49.99

EXTRA! EXTRA! 2 x FLIPPY DISC £24.99

300K fantastic clip art, over 25 fonts and utility software.

*MAX 16K ROM £19.99


MAX provides an easy to use graphic based front end to your computer's disc filing system including a comprehensive set of disc management operations such as cataloging, copying, deleting and re-naming. You can also run programs from within MAX. Available for the BBC, B+, Master 128 and Master Compact. Please state which version is required.



*AMX DESIGN 32K ROM AND DISC £69.99

A highly sophisticated CAD package which allows the user drawings to be produced such as a simple PCB design up to the most intricate, architectural drawing.

Advanced features include full zoom and macro facilities, 58x58 screen canvas, full supported printer and plotter output. Available for the BBC, B+, Master 128 and Master Compact.



**FANTASTIC
AMX
SOFTWARE
OFFER!**

The additional AMX Software range that requires the original AMX Art Rom or Super Art Rom including: 3D Zicon normal price £24.99 Database normal price £24.99 XAM normal price £24.99 MindGames normal price £14.99. Total price - £89.96 but now available as a complete package at only £69.99.

These superb products are available from all good computer dealers or direct by Cheque, Access or Visa. All prices include VAT and post and packaging.



FOR INSTANT ACCESS, VISA ORDERS TELEPHONE (0925) 413501/2/3



* ALL THESE PROGRAMS WORK WITH
KEYBOARD, JOYSTICK OR MOUSE.

AMX SOFTWARE

· IMAGINATION AT YOUR FINGERTIPS ·

ADVANCED MEMORY SYSTEMS LTD. 166/170 WILDERSPOOL CAUSEWAY, WARRINGTON, WA4 6QA. TELEX 628672 AMSG. FAX 0925 58039.
TUBELINK ON PRESTEL PAGE 2582182 SUPPORTS THE AMX MOUSE, AND ALL AMX SOFTWARE.

EDUCATION

Superart and stop press are now available under licence for ECONET levels 2 and 3. Please apply direct for Educational Discounts.

THE MICRO USER

BODY BUILDING

COMMS

HAC MAN

GAME

UTILITIES

CEEFAX

REVIEWS



EXCLUSIVE
David Braben tells how he wrote the epic that is creating a revolution in games programming

Vol. 6 No. 9 November 1987

Managing Editor
Derek Meakin

Features Editor
Peter Davidson

Production Editor
Peter Glover

Art Editor
Heather Sheldrick

Associate Editor
Alan McLachlan

Assistant Features Editor
Steve Turnbull

News Editor
Mike Cowley

Technical Editor
Mike Cook

Promotions Editor
Christopher Payne

Reviews Coordinator
Pam Turnbull

Advertising Sales

**John Snowden, Peter Babbage,
Gail Blincow**

Tel: 061-456 8835 (Editorial)
061-456 8383 (Admin.)
061-456 8500 (Advertising)
061-480 0171 (Subscriptions)

Telecom Gold: 72:MAG001

Telex: 265871 MONREF G
Quoting Ref. MAG001

Prestel Mailbox: 614568383

Published by:
Database Publications Ltd,
Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY.

Subscription rates for
12 issues, post free:

£15 - UK
£25 - Europe (incl. Eire)
£31 - Overseas Surface
£42 - Overseas Air

ABC 59,727
Jan-June 1986
ISSN 0265-4040

The Micro User welcomes program listings and articles for publication. Material should be typed or computer-printed, and preferably double-spaced. Program listings should be accompanied by cassette tape or disc. Please enclose a stamped, self-addressed envelope, otherwise the return of material cannot be guaranteed. Contributions accepted for publication will be on an all-rights basis.

© 1987 Database Publications Ltd. No material may be reproduced in whole or in part without written permission. While every care is taken, the publishers cannot be held legally responsible for any errors in articles, listings or advertisements.

The Micro User is an independent publication and neither the BBC nor Acorn Computers Ltd are responsible for any of the articles in this issue or for any of the opinions expressed.

News trade distribution: Diamond Europress Sales & Distribution, Unit 1, Burgess Road, Ivy-house Lane, Hastings, East Sussex TN35 4NR. Tel: 0424 430422.

CONTENTS

Game



64 Dune Hunter

Command the Dune Flier in this fast-scrolling galactic battle.

Utilities

109 Colour Touch-up

An easy way to edit your graphics screens – right down to their pixels.

123 Lister

How to print out text and Basic programs in neat columns.

Reviews

23 Three Cs

Three BBC Micro implementations of this powerful language compared.

31 Software Scene

Our experts cast a critical eye over the latest games releases.

39 Brought to Book

We take a close look at two new books on View.

41 Master Board

The BBC Master doesn't need a rom board – or does it?

133 Shades of Colour

Give your BBC Micro 4096 colour potential – with the help of SPX.

Education

73 News

Up-to-date reports about new ways of using the BBC Micro in education.

79 Teachers' Notes

Why wait for the post when you can get Teachers' TV notes instantly?

83 Reviews

A desktop publishing package, plus an educational adventure.

89 Letters

Another selection from our mailbag expressing educational views.

Features

7 News

All the latest in the ever-changing world of your BBC Micro.

42 Adventures

The Mad Hatter presents a compilation of your clues and ideas.

47 Problem Solved

More answers to some of those mind-boggling hardware problems.

52 Hac Man

The full solution to Cholo together with the best hints and tips.

55 Beginners Communications

What you'll find when you call Britain's biggest bulletin board.

58 Library

More high quality routines brought together for you to use.

61 Computing in Action

Make sure you don't buy more paint than you really need.



63 Ceefax Guide

What's coming this month on the BBC's teletext pages.

68 Squaring Circles

Find out for yourself how to draw circles fast on your BBC Micro.

90 Innovation Update

Some more of the entries to *The Micro User* Innovation Award 1987.

104 Body Building

Our technical guru asks whether it's worth using salvaged LCDs.

106 MicroLink News


More developments on Britain's nationwide online database for micros.

EXCLUSIVE

Zarch – the most exciting game ever released ... on the fastest micro in the world. Now we can reveal the secrets of how the author, David Braben, came to write this stunning game. Plus his vision of the future. See Page 16.

WIN

this rom board packed with roms, courtesy of Watford Electronics to celebrate their 15th birthday.

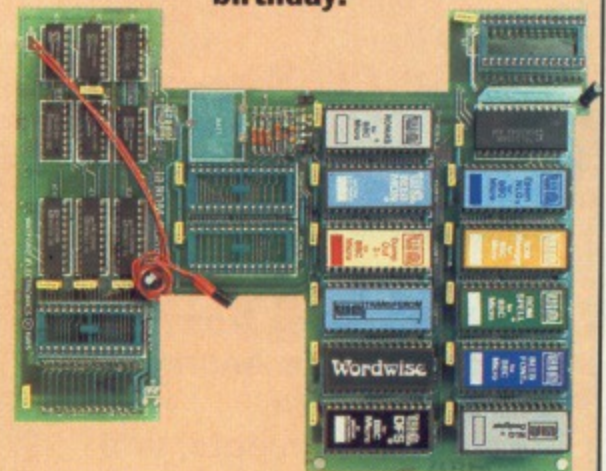

Full details on Page 131

MICRO USER CLASSIFIEDS

Save money on bargain offers from fellow readers – Page 140.




127 Gallery

Colourful masterpieces created by our readers on the BBC Micro.

143 Letters

The chance to get your news, views, moans and name into print.

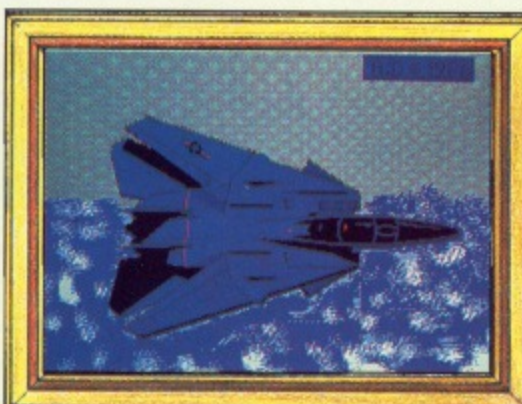

NEXT MONTH

GAME

Family fun with Santa and the Snowmen

ARCHIMEDES

Reviews of all the latest software

DESKTOP PUBLISHING

What all the fuss is really about

MUSIC

DIY composing: full listing

THE MICRO USER

December

issue on

sale

November 4



Royal Horticultural Hall
Westminster, London SW1



SEE the first software, hardware and books for the Archimedes from companies like Acornsoft, Clares, Minerva, Computer Concepts, and many others.

BUT THAT'S NOT ALL!

- ★ Hardware and software galore for BBC Micro and Electron owners
- ★ Lots of bargains for the BBC Micro and Electron at rock-bottom prices
- ★ Technical advice from the experts over the whole range of Acorn machines

10am-6pm, Friday November 13
10am-6pm, Saturday November 14
10am-4pm, Sunday November 15

Here's your personal invitation to try out the revolutionary Archimedes for yourself

Be one of the first to play Zarch, the spectacular new game that is the first to make use of the Archimedes' incredible speed to magnificent effect – the four-directional scrolling really has to be seen to be believed!

Come along and meet the author, David Braben, creator of Elite. Try your hand at the game itself . . . and prepare to be amazed!

All this – and much, much more – at the 17th record-breaking Electron & BBC Micro User Show.

Save £1 a head with this advance ticket order

Please supply:

Adult tickets at £2 (save £1)..... £

Under-16s tickets at £1 (save £1)..... £

Total £ _____

Cheque enclosed made payable to Database Publications Ltd.

Please debit my credit card account

No.

Signed.....

Admission at door: £3 adults, £2 under 16's

Advanced ticket orders must be received by Wednesday November 4, 1987

Post to: Show Tickets, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Name.....

Address.....

.....

A145

PHONE ORDERS: Ring Show Hotline: 061-480 0171
PRESTEL ORDERS: KEY *89, THEN 614568383
MICROLINK ORDERS: MAILBOX 72:MAG005 5
Please quote credit card number and full address



Stitch in time...

SCHOOLS and colleges have been rushing to buy Knitwear Designer, the program that allows users to create stylish sweaters on the BBC Micro.

Teachers have recognised the program's potential value within the home economics syllabus – particularly for the new GCSE examination.

Education establishments from Glasgow to Plymouth began the new school year by familiarising themselves with the software, which costs £8.95 on tape and £9.95 on disc.

Typical of schools using Knitwear Designer is Kitwood Girls School in Boston, Lincs.

Head of home economics Margaret Barsley said: "The program will help our girls design and produce their own garments – drafting individual patterns to their own sizes – and prepare them for the GCSE textiles exam.

"We had one girl doing knitwear designing last year, but that was an individual talent – now we can get all our fourth and fifth year homecraft girls involved in this activity".

Christine Carter, head of the textile department at Thomas Lord Audley School, Colchester, said: "I'm looking forward to fitting Knitwear Designer into the GCSE home economics programme for our fourth and fifth years.

"This year, apart from our BBC Micros, we have six knitting machines and a colour printer so we should be able to realise the full potential of the new software".

Acorn sales slump 'just a hiccup'

ACORN's two-year battle to pull back from the brink of financial disaster has suffered a setback.

Sales revenues for the first six months of this year were down compared to the 1986 performance, and the company recorded a net loss of £1.38 million in the period after making a £298,000 profit in the first half of last year.

But Acorn has dismissed the results as a mere hiccup on the road to recovery.

The company says it expected the investment necessary to launch the Archimedes and its associated products to have a significant impact on the half-term results.

"The Master series continued to sell well, although effective early promotion for Archimedes led to a slowing down in sales in the second quarter as customers evaluated the new line", said managing director Brian Long.

"In addition to the continuing research and development expenditure, heavy costs of manufacturing and marketing start-up were incurred.

"We anticipated these costs and planned for them out of the revenue accruing from the existing products.

"In spite of flat sales and heavy expenditures we controlled our cash position effectively – at the end of June our overdraft was £2.8 million, the same as at the end of 1986 and well within our facilities of £16 million".

Turnover in the first six months of 1987 was down more than £500,000 from last year's £19.6 million. The

operating loss was £950,000 and £430,000 interest charges were incurred.

Acorn says its new products have been greeted with enthusiasm "by both existing and potential purchasers and users in many sectors".

A statement issued with the balance sheet said: "The renewal and extension of the licensing agreement with the BBC for the entry level Archimedes 300 machines and the BBC's continuing commitment to the development of computer literacy is widely welcomed.

"Acorn's strategic commitment to international stan-

dards, and in particular the Unix operating system, is reflected in the product specifications".

Brian Long added: "The existing software portfolio is being strengthened by quality packages from a wide range of independent software vendors.

"We are particularly excited about those packages which are beginning to make effective use of the exceptional power that Archimedes machines offer, and we are opening up opportunities to provide total systems to markets where we have not traditionally been suppliers".

New products line up for big show

SEVERAL major exhibitors at the Electron & BBC Micro User Show in November have begun to reveal details of the new products and bargain offers they will be bringing with them.

Although many firms are still keeping their new products under wraps, there's enough evidence of exciting developments to confirm that once again the New Horticultural Hall, Westminster, is the place for BBC Micro, Master and Archimedes users to be from November 13 to 15.

Watford Electronics will unveil a host of new products for the BBC Micro – including a 30Mb Winchester, intel-

ligent printer sharer and disc sharer, Quest Paint extension rom, graphic-based front end rom for DFS and Quest publishing software. The firm will also preview a range of add-ons for the Archimedes.

Six new business packages will be launched by Minerva Systems. For the BBC Micro are a Newsagents package price £69.95, System Gamma price £49.95 and Delta Base price £29.95. Archimedes users are offered System Delta Plus at £69.95, Reporter at £24.95 and Accountancy Suite at £324.75 or £64.95 for each individual

Turn to Page 9 ►

ARCHIMEDES
NOW IN STOCK
AS AT 9.9.87

-Class Utility Software & Printers from the Professionals.

CJE Micro's

Unbeatable in print.

CJE Micro's are an official ACORN approved dealer.

A wide range of accessories and software for ACORN, Amstrad and Atari computers are on display in the CJE Micro's retail showrooms.

Multi-Font NLQ

("Very good package . . .
Saved me over £100")

V. BUNCE, OXFORD. DEC 86.

Upgrade your printer to NLQ with a choice of many fonts. Up to 49 predefined fonts are available on 4 discs, or you can design your own. Multi-font is easy to use and compatible with nearly all software. For prices see below or ring for further details on 0903-213361.

Some of the fonts available are shown here:

This is STANDARD
This is COURIER
This is ITALIC
This is GOTHIC
This is COMPTS
This is BOLD
This is SHADOW
This is OUTLINE
This is BROWAYE
This is THEATRE

CJE Welcome EXPORT and TRADE ORDERS - inquire for delivery costs. Phone/Credit Card and Official Orders are accepted. Please ring for all the latest information and prices on 0903-213361.

FONTAID

("Good value . . . Useful buy")

BEEBUG MAY 87.

Fontaid is a must for any Canon or Kaga Taxan owner. 60 predefined fonts are available or you can design your own. A Star NL10/NX15 version is also now available, so inquire for further details.

"Impressed... Delightful Simplicity... Easy to use"

(MICRO USER JUNE 87)

INFORM from CJE Micro's.

This unique sideways RAM information system is quick, versatile and simple.

NOW - Solidisk 256K version is also available.

Master Writeprotect/ROM select switch.

"I cannot praise it enough . . . Worth buying!!" MICRONET 800116575

This switch system selects RAM protected, RAM unprotected or ROM. Each bank is separately switchable. This is the MOST POWERFUL switch unit available at only £15.00 inc VAT. (p & p £1.00 extra).

CJEmicros

CJE Micro's (Dept), 78 Brighton Road, Worthing,
W. Sussex BN11 2EN. Tel: 0903-213361.

SOFTWARE PRICE LIST

All prices include VAT, but please add £1.00 for postage/packing and state 40, 80 track or 3 1/2" ADFS when ordering.

MFNLQ £30.00
Font Discs B, C & D each £15.00

Fontaid £30.00
Fontaid with 6264 RAM £36.00
Font Discs A, B, C, D,
EA & Lang each £15.00

Inform £20.00

PRINTERS

Delivery on all printers is free. Ring for a sample printout, specification and the latest prices.

The following Near Letter Quality printers all come with centronics interface, friction and tractor feed.

Panasonic KXP1081 £180.00
Canon PW1080A £260.00
Star NL10 £230.00
Star NX15 £410.00
Star NB24/10 (216cps) £599.00

Juki Daisywheel £330.00
Free delivery on printers

CJE Printer packs

The CJE packs include; Cable, delivery, paper, plug, utility software and booklet. Please ask for further details.

The Printer packs cost £15.00 with printer: e.g. NL10 + pack = £260 + £15 = £275 inc. VAT.
BBC Cable if purchased separately is £8.00. Software on its own: £11.00 + £1 p&p.

NEWS

Show preview

◀ From Page 7

module. An Archimedes version of its Fontaid program will be released by CJE Micros, price £30.

Centec's new range of 3.5 and 5.25in discs will be available at "substantially special" introductory prices. The firm is also increasing its range to include printer paper.

A new auto-routing package for the BBC Micro will be available from Pineapple Software. It allows menus to be designed and altered to the user's own specifications. Price £85.

Computer Concepts will be previewing two projects it is working on for the Archimedes – a word processor and programmable CAD package.

Norwich Computer Services will reveal its plans for a technical hotline and other user support for the Archimedes.

A series of Blue Ribbon budget-priced dual cassettes for the BBC Micro will be launched by CDS Software. Priced £1.99 each are Golf, Morph, Video Arcade, Trapper, Keyhunt and Return of R2. The firm also hopes to have the BBC version of Colossus Bridge available in time for the show.

Four new BBC Micro programs are on their way from BBC Software – contract bridge game Black Queen, strategy game Bismarck, primary reading program Jordie Racer – all at £14.95 – and Spanish language tutor España Viva which costs £22.95.

WeServe is selling its Recall and Printer Buffer Utility for the BBC Micro and Master at £4.95 – £10 off the usual price – and offering its complete range of printers at discounts of £10 to £20.

The Electron & BBC Micro User Show runs from Friday to Sunday, November 13 to 15. A money-saving advance ticket order form appears on Page 6.

Award for best DTP book

A FOURTH major category has been added to the list of Desktop Publishing Awards to be presented this autumn.

Already the search is on to find the best DTP newspaper or magazine, in-house company report, and leaflet or newsletter. Now the contest enters the world of books.

The extra award, for the best example of a book predominantly DTP produced has been introduced in response to appeals from the book

publishing sector of the massive DTP industry – estimated to be worth £300 million by 1988.


Sponsored by PIRA, the UK technology centre for the printing and publishing industries, the winners of the awards will be announced at the prestige showcase, the Desktop Publishing Show, being held at the Business Design Centre in London from October 15 to 17.

A panel of expert judges

drawn from the fields of both design and print will make the final decisions.

Entries should be sent to the The Desktop Publishing Awards 1987, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

"We are happy to extend the awards to cover books because we believe there will eventually be a vast range of applications for this exciting new technology," said the PIRA's Tom Hunter-Craig.

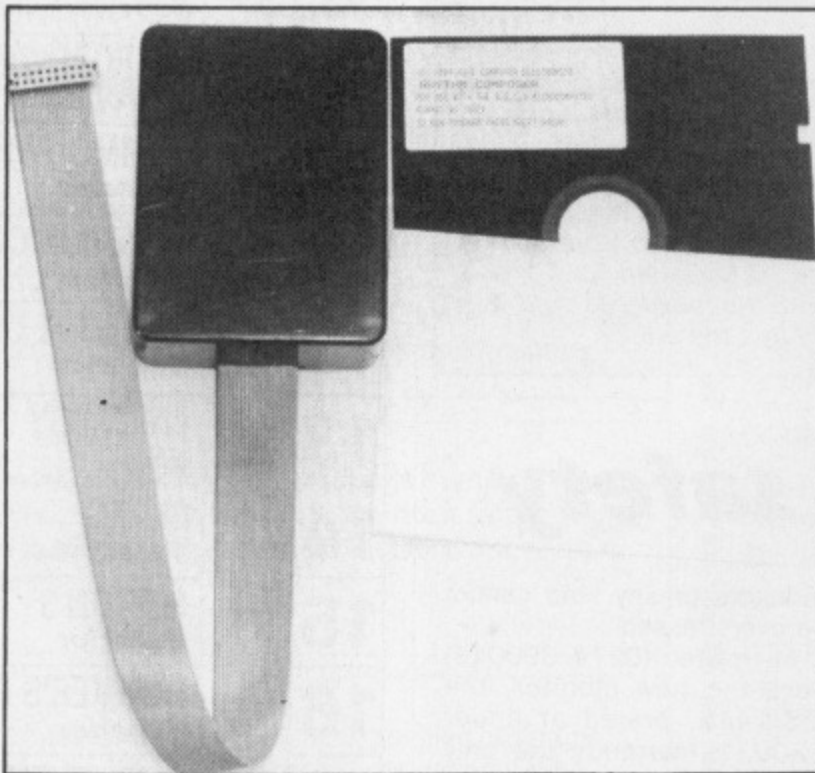

ENHANCED DRUMS

MORE software has been produced to enhance the Rice Digital Drum attachment for the BBC Micro.

The new package has additional drum sounds including hand clap, and a built-in echo effect which can be applied to individual channels.

There are four different types of synthesized bass sound available from the harmonic synthesiser, picking strength can be adjusted, and sections of the operating

system have been converted from Basic to machine code for better performance.

Basic drum unit – digital to analogue converter and rhythm composer – costs £47.50, drum unit with bass synthesiser and sequencer software costs £85.

New number

IN the September edition of The Micro User we printed the telephone number of Lancaster Consultants. This has now changed to 0524 65179.

Making music

A NEW package which is designed to revolutionise the original Acorn Music 500 music system has been released by Peartree Computers.

The Music 87, for BBC Micros and Masters, is designed to overcome problems of using the original programming language Ample.

Marketing manager of Peartree (0480 50595) Chris Gee said that Ample was very hard to learn, but with Music 87 no programming is required.

"Our new software is a complete top end for the language providing menus and the opportunity to use a mouse and light pen. It also offers a wave form designer and a sound shaper", he said.

The software can be bought separately by existing Music 500 and Music 5000 users. It costs £39.95.

The whole package also includes a synthesiser box which plugs into the 1Mhz bus and produces all the sounds. The total cost is £79.95.

"An expert who used it recently declared it five times as fast as the original", said Chris Gee.

Champagne Cameron

A NATIONWIDE electronic mail competition offering a magnum of champagne as the star prize resulted in a giant hangover when the winner unwittingly caused the software in the central computer to crash.

When ex San Francisco police officer Cameron (Cam) Lacey posted the 10,000th message on the MicroLink bulletin board from his office in Grimsby, all that should have happened was that he received a three litre bottle of Moet & Chandon to mark the milestone achievement.

Unfortunately what no one realised at that time was that the BBS system was only designed to cope with a data field of four characters – up to and including 9,999.

So when just one additional message was received, it was as if a giant fuse had blown.

When the crash came there was consternation at MicroLink headquarters. What made matters worse was that technical chief Tim Clarkson

was on holiday and all attempts by his staff to revive Britain's biggest bulletin board were unsuccessful.

After two hours of frantic transatlantic telephone calls, the American authors of the bulletin board software finally traced the problem.

They were, however, unable to make the message numbering system accept a figure larger than 9,999. All they could do was make room by deleting the first 5,000 messages.

In fact, the only person left with a grin on his face was Cameron Lacey.

Mind you – according to MicroLink boss Derek Meakin – it should have been a sheepish one. For it seems that Cam cheated a little bit.

"He'd obviously written a program that started sending identical messages just as the number of messages on the board was approaching the 10,000 mark".

All the messages said was: "Is this the one?"

Monitor safety

MICROVITEC is launching a metal cabinet monitor especially for the Archimedes. But with it comes a warning.

The Yorkshire company was alarmed to read suggestions that its Cub series monitors could be adapted by reconnecting some of the circuitry.

Marketing manager Jim Whitson said: "Microvitec would advise strongly against this being attempted. Monitors use high voltages, and injuries may well result if an unskilled person tries to make these changes.

"The modification is in itself unsatisfactory and anyone using a monitor modified in this way will not obtain the usual high quality of display.

"The danger to unskilled people attempting to modify

monitors of any kind cannot be overstressed".

Microvitec (0274 390011) says the new monitor, the MS/1445, priced at under £300, is currently the only metal cabinet monitor available for the Archimedes.

New home

AFTER four years during which it claims to have become the largest BBC Micro specialist dealer in the North West, Microman Computers (074-488 3667) has moved to new premises near St Helens, Mersyside.

The converted stone barn at Rainford contains two large showrooms with extended facilities for demonstrating computers, peripherals and software.

| THIS MONTH | LAST MONTH | TITLE (Software House) | TAPE PRICE |
|------------|------------|---|------------|
| 1 | 1 | GRANDPRIX CONSTRUCTION SET <i>Superior</i> | 9.95 |
| 2 | 18 | SPY VS SPY <i>Tynesoft</i> | 9.95 |
| 3 | 3 | DUNJUNZ <i>Bug-Byte</i> | 2.99 |
| 4 | 4 | CODENAME DROID <i>Superior</i> | 9.95 |
| 5 | • | CRAZEE RIDER <i>Superior</i> | 9.95 |
| 6 | 6 | SUPERIOR COLLECTION VOL 1 <i>Superior</i> | 9.95 |
| 7 | 5 | PHANTOM <i>Tynesoft</i> | 7.95 |
| 8 | 2 | AROUND THE WORLD IN 40 SCREENS <i>Superior</i> | 8.95 |
| 9 | 10 | MICROPOWER MAGIC <i>Micropower</i> | 7.95 |
| 10 | 13 | COMMONWEALTH GAMES <i>Tynesoft</i> | 6.95 |
| 11 | 7 | SUPERIOR COLLECTION VOL 2 <i>Superior</i> | 9.99 |
| 12 | • | BUG-BYTE COMPILATION <i>Bug-Byte</i> | 7.95 |
| 13 | 9 | PAPERBOY <i>Elite</i> | 9.95 |
| 14 | 16 | BIG KO <i>Tynesoft</i> | 7.95 |
| 15 | 12 | REPTON 3 <i>Superior</i> | 9.95 |
| 16 | 11 | STRYKER'S RUN <i>Superior</i> | 9.95 |
| 17 | • | GISBURNE'S CASTLE <i>Ricochet</i> | 1.99 |
| 18 | • | ARKANOID <i>Imagine</i> | 8.95 |
| 19 | 20 | WINTER OLYMPICS <i>Tynesoft</i> | 7.95 |
| 20 | • | MINI OFFICE II <i>Database Software</i> | 14.95 |

Compiled by Gallup/Microscope

There are four new entries this month, as well as Mini Office II re-entering at number 20. Superior keep first position with Grand Prix Construction Set and you can see a review of its new game in this month's issue of *The Micro User*.

C & F ASSOCIATES

Quality Service at
Competitive Prices

| ADDICTIVE | | | DR. SOFT | | | Spitfire 40 | | | Repton 3 | | |
|----------------------------|-------|-------|---------------------------|-------|-------|-------------------------|-------|-------|-----------------|-------|-------|
| Cass | Disc | Comp | Cass | Disc | Comp | Cass | Disc | Comp | Cass | Disc | Comp |
| Football Manager | 2.99 | - | Phantom Combat | 7.50 | 10.95 | 7.75 | 10.95 | 10.95 | 7.75 | 10.95 | 12.95 |
| ALTERNATIVE | | | ELECTRIC DREAMS | | | ROBICO | | | Acomsoft Hits 1 | | |
| Video Pinball | 1.99 | - | Firetrack | 7.75 | 12.95 | The Hunt | 7.95 | 10.95 | 7.75 | 10.95 | 12.95 |
| Red Arrows | 1.99 | - | ELITE | | | Rick Hanson | 7.95 | 10.95 | 7.75 | 10.95 | 12.95 |
| ASL | | | Paperboy | 7.75 | 12.95 | Project Thesis | 7.95 | 10.95 | 10.95 | 12.95 | 17.50 |
| Omega Orb | 6.75 | 10.95 | Airwolf | 7.50 | 12.95 | Myorem | 7.95 | 10.95 | 7.75 | 10.95 | 17.50 |
| Graham Gooch | 7.75 | 10.95 | FIREBIRD | | | Rick Hanson Trilogy | 18.95 | 19.95 | 7.75 | 10.95 | 12.95 |
| Thunderstruck | 6.75 | 10.95 | Star Drifter | 1.99 | - | Island of Xaan | 7.95 | 10.95 | 10.95 | 12.95 | 17.50 |
| Thunderstruck 2 | 6.75 | 10.95 | Sentinal | 7.75 | 12.95 | Banjax | 2.95 | 4.95 | 7.75 | 10.95 | - |
| Sphere of Destiny | 6.75 | 10.95 | Cholo | 15.95 | - | Beeline | 2.95 | 4.95 | 6.50 | 10.95 | - |
| Power Pack | 7.75 | - | IMAGINE | | | Enthar 7 | 14.95 | - | 6.50 | 10.95 | - |
| BUBBLE BUS | | | Arkanoid | 7.20 | - | SUPERIOR | | | Oxbridge | 6.75 | - |
| Starquake | 7.75 | 10.95 | Konam's Coin Op. Hits | 7.75 | - | Play It Again Sam | 7.75 | 10.95 | 6.50 | - | - |
| BUG-BYTE | | | Yie Ar Kung Fu 2 | 7.20 | - | Palace of Magic | 7.75 | 10.95 | 6.50 | - | - |
| Dunjunz | 2.95 | 6.95 | Mikie | 6.95 | - | Crazy Rider | 7.75 | 10.95 | 6.75 | - | - |
| Plan 8 | 2.95 | - | INCENTIVE | | | Codename Droid | 7.75 | 10.95 | 6.75 | - | - |
| Bug-Byte Compendium | - | 6.95 | Graphic Adventure Creator | 19.95 | 22.95 | Around the World | 5.95 | 6.75 | 6.75 | - | - |
| CDS | | | Ket Trilogy | 7.75 | 10.95 | Strykers Run | 7.75 | 10.95 | 6.75 | - | - |
| Colossus Chess 4 | 7.75 | 12.95 | LEISUREGENIUS | | | Superior Collection 1 | 7.75 | 10.95 | 6.75 | - | - |
| Steve Davis Snooker | 6.95 | 10.95 | Scrabble | 10.95 | 12.95 | Superior Collection 2 | 7.75 | 10.95 | 6.75 | - | - |
| Brian Clough Football | 12.95 | 15.95 | Monopoly | 10.95 | 12.95 | Grand Prix Construction | 7.75 | 10.95 | 6.75 | - | - |
| DATABASE | | | LOGOTRON | | | Speech | 7.50 | 10.95 | 6.75 | - | - |
| Mini Office 2 | 12.45 | 14.95 | XOR | 7.75 | 10.95 | | | | | | |
| Mini Office 2 (Master 80T) | - | 17.50 | XOR Designer | - | 12.95 | | | | | | |
| French on the Run | 7.75 | - | LOTHLORIAN | | | | | | | | |
| DESIGN PEOPLE | | | Roundheads | - | 10.95 | | | | | | |
| Sink the Bismark | - | 9.95 | MICRO-POWER | | | | | | | | |
| Tanks! | - | 10.95 | Micro-Power Magic | 6.75 | 6.75 | | | | | | |
| Battle of Britain | 7.75 | 10.95 | Micro-Power Magic 2 | 6.75 | 6.75 | | | | | | |
| DOMARK | | | Imogen | 7.20 | 7.75 | | | | | | |
| Trivial Pursuit | 12.95 | 17.50 | MIRRORSOFT | | | | | | | | |
| Living Daylights | 7.75 | 10.95 | Strike Force Harrier | 7.50 | - | | | | | | |

ALL PRICES INCLUDE VAT AND POSTAGE & PACKING
(Overseas Orders add £1.00 per order or Airmail £2.00 per item)

Cheques/PO payable to:



C & F ASSOCIATES

and send to

**C & F ASSOCIATES (MU) CRANFORD HOUSE,
WOOLSEY, BIDEFORD, N. DEVON EX39 5QW**

Telephone: (023 73) 619

Orders normally despatched within 24 hours of receipt but allow maximum of 7 days
For our comprehensive range of BBC and Electron Programs Please send for list



**BUSINESS SYSTEMS • HARDWARE
SOFTWARE • VIDEO SYSTEMS
OFFICIAL DOMESDAY DEALER**

0602 787923

Acorn APPROVED DEALER
The choice of experience

Computers

Acorn Products
Archimedes from £799.00
BBC Master Compact from £349.00
Phone for Special Package Offers.
Choice of either Free Software, Discs, Plinths etc.

| | |
|--|-------------|
| BBC Master 128 | £369.00 (a) |
| BBC Master ET (Econer filing system only) | £289.00 (a) |
| Master Turbo Upgrade | £99.00 (c) |
| Master 512 Upgrade | £189.00 (a) |
| Master 128 Eprom Cartridge | £11.00 (e) |
| Master Compact RS232 Interface | £26.00 (e) |
| 64k Upgrade kit for BBC B+ 64k | £30.00 (d) |
| 1770 Disc Interface (for BBC B) | £41.00 (d) |
| ADFS ROM (BBC B+ or BBC B with 1770 interface) | £25.00 (e) |

Dot Matrix Printers

| | |
|--|-------------|
| Mannesmann Tally MT85 80col/180cps + 45cps NLO | £244.00 (a) |
| Epson LX86 80col/120cps + 16cps NLO | £229.00 (a) |
| Star NL10 80col/120 cps 30 cps NLO | £199.00 (a) |
| Citizen 1200 80col/120cps+25cps NLO | £164.00 (a) |
| Citizen MSP10 80col/160cps + 40cps NLO (8k buffer) | £225.00 (a) |
| MP 165 80col/120cps 38cps NLO | £165.00 (a) |
| MP 200 80col/200cps 40cps NLO | £249.00 (a) |
| MP201 132 col 200cps 40cps NLO | £274.00 (a) |

Daisy Wheel Printers

| | |
|---------------------|-------------|
| Gakken 110col/16cps | £189.00 (a) |
| MP26 110col/25cps | £234.00 (a) |
| MP40 132col/40cps | £379.00 (a) |

Monitors

| | |
|--|-------------|
| Philips BM7502 High res mono green + sound | £69.00 (a) |
| Philips BM7522 High res mono amber + sound | £74.00 (a) |
| Philips CM8533/8833 Med res colour RGB + composite video + sound (Green screen switchable) | £239.00 (a) |
| Microvitec 1431MS STD res colour RGB | £179.00 (a) |
| Microvitec 1451MS Med res colour RGB | £224.00 (a) |
| Microvitec 1441MS High colour res RGB | £375.00 (a) |
| Master Monitor Plinth | £12.00 (c) |
| Master Monitor Plinth with shelf | £22.00 (b) |

* All monitors are supplied with a free BBC lead *

Disc Drives

| | |
|---|-------------|
| Viglen 40T SS 100K | £79.00 (a) |
| Direct VPD0241 40/80T DS 400K | £99.00 (a) |
| Direct VPD0243 Dual 40/80T DS 800K (Horizontal) | £194.00 (a) |
| Direct VPD0246 40/80T DS 400K + PSU | £114.00 (a) |
| Direct VPD0248 Dual 40/80T DS 800K + PSU (Horizontal) | £214.00 (a) |
| Direct VPD0249 Dual 40/80T DS 800K + PSU on Master Plinth | £229.00 (a) |
| UFD MD802C Dual 40/80T DS 800K (Vertical) | £219.00 (a) |
| UFD MD802E Dual 40/80T DS 800K + PSU (Vertical) | £244.00 (a) |
| Winchester Drives from | £549.00 (a) |

Direct Drives - Complete with a three years warranty

Discs and Accessories

| | |
|---|------------|
| 3M 744 SS/DD 48TPI 5.25" (Box of 10) | £11.00 (d) |
| 3M 745 DS/DD 48TPI 5.25" (Box of 10) | £13.00 (d) |
| 3M 747 DS/DD 96TPI 5.25" (Box of 10) | £17.00 (d) |
| 3M 355S SS/DD 3.5" (Box of 10) | £21.00 (d) |
| 3M 350S DS/DD 3.5" (Box of 10) | £29.00 (d) |
| B and S DS/DD 96TPI 5.25" (Case of 10) | £13.00 (d) |
| Lockable Library Cases | |
| 50 Disc | £8.00 (d) |
| 100 | £10.00 (d) |

Modems

| | |
|-------------------------------------|-------------|
| Miracle WS2000 + BBC Lead | £95.00 (c) |
| Miracle WS4000 V2123 + BBC Lead | £144.00 (a) |
| Miracle Databeeb Communications ROM | £24.00 (e) |
| Pace Nightingale + Commstar II | £94.00 (c) |
| Pace Commstar II ROM | £28.00 (e) |

Modems (continued)

| | |
|--|------------|
| Nightingale Auto Dial/Auto Answer Board and Software | £52.00 (d) |
|--|------------|

** Please note: BAPT approval on modems only **

Fanfold Papers and Labels

| | |
|--|------------|
| 2000 x 1 Part 60gm 11" x 9.5" STD Perf | £11.00 (c) |
| 2000 x 1 Part 60gm 11" x 9.5" Micro Perf | £12.00 (c) |
| 1000 x 1 Part 85gm 11" x 9.5" Micro Perf | £9.00 (c) |
| 1500 x 1 Part 90gm Perfect A4 Micro Perf | £17.00 (b) |
| 1000 Labels 89mm x 36mm | £4.00 (d) |
| 1000 Labels 89mm x 49mm | £6.00 (d) |
| 1000 Labels 102mm x 36mm | £5.00 (d) |

Please state single or twin row when ordering labels

AMX Mouse and Software

| | |
|-------------------------|------------|
| AMX Mouse and Super Art | £80.00 (d) |
| AMX Pagemaker | £37.00 (d) |

Please state computer (B/B+/Master)

Printer Ribbons & Accessories

| | |
|--|------------|
| Epson LX80/86 Ribbon (Compatible) | £2.89 (e) |
| Epson 8302 LX80/86 Tractor Unit | £19.00 (c) |
| Epson 8338 LX80/86 Single Sheet Feeder | £49.00 (b) |
| Epson MX80/FX80/FX85/Juki 5510 Ribbon (Compatible) | £2.50 (e) |
| Taxan 810/Canon 1080 Ribbon | £3.74 (e) |
| Juki 5520 Colour Ribbon | £7.50 (e) |
| Citizen 120D Ribbon | £3.75 (e) |
| Mannesmann Tally MT85 Fabric Ribbon | £5.00 (e) |
| Mannesmann Tally MT85 Carbon Film Ribbon | £7.00 (e) |

Full range of ribbons & accessories supplied - call for details

Languages

| | | | |
|--------------|------------|------------|------------|
| Micro-Prolog | £50.00 (d) | ISO-Pascal | £42.00 (d) |
| Logo | £44.00 (d) | BCPL | £39.00 (c) |
| Forth (Disc) | £15.00 (e) | Comal | £32.00 (d) |
| Lisp | £33.00 (e) | Micro Text | £37.00 (d) |

Business Software

| | | | |
|------------------|------------|-------------------|------------|
| View 2.1 | £37.00 (d) | View 3.0 | £39.00 (d) |
| Hi-View | £37.00 (d) | View Sheet | £37.00 (d) |
| View Store | £37.00 (d) | View Spell | £29.00 (d) |
| View Plot (Disc) | £21.00 (e) | View Index (Disc) | £10.00 (e) |

Business Software (continued)

| | | | |
|-------------------------------|------------|---------------|------------|
| View Printer Driver Generator | | | |
| Tape | £7.00 (e) | Disc | £8.00 (e) |
| Inter Sheet | £39.00 (d) | Inter-Chart | £26.00 (d) |
| Inter-Base | £55.00 (d) | Inter-Word | £39.00 (d) |
| Wordwise | £30.00 (d) | Wordwise Plus | £37.00 (d) |
| Spell Master | £47.00 (d) | Over View | £84.00 (d) |

Utilities

| | |
|---|------------|
| Fleet Street Editor (Mirrorsoft) | £31.00 (d) |
| Fleet Editor Street Fonts and Graphics (Mirrorsoft) | £11.75 (e) |
| Fontwise Plus (Clares Micro Supplies) | £16.00 (e) |
| Replica III (Clares Micro Supplies) | £11.00 (e) |
| Replay (B/B4) | £35.00 (d) |

Please state 40 or 80 track and machine when ordering

Books (No VAT on books)

| | |
|----------------------------------|------------|
| Master Reference Manuals | |
| Part 1 | £14.00 (d) |
| Part 2 | £14.00 (d) |
| Advanced Master Reference Manual | P.O.A. |
| Lisp | £7.00 (e) |
| Forth | £7.00 (e) |
| ISO Pascal | £7.00 (e) |
| BCPL | £14.00 (d) |
| View Guide | £5.00 (e) |
| Into View | £5.00 (e) |
| View 3 | £9.00 (e) |
| View Sheet | £9.00 (e) |
| View Store | £9.00 (e) |
| Comal | £9.00 (d) |

* Large range supplied - phone for details *

ROM Boards

| | |
|-----------------|------------|
| ATPL 'Sidewise' | £36.00 (d) |
|-----------------|------------|

Please state B or B+

UK Customers: please add 15% VAT to all prices (including carriage).

Government and educational establishments official orders welcomed. When ordering please enclose a cheque or postal order for the appropriate amount. UK Carriage Rates (a) £8.50 - courier insured delivery (b) £3.50 (c) £2.50 (d) £1.50 (e) £1.00. All prices are correct at time of going to press. All offers are subject to availability, all prices are subject to change without prior notification and are available on request. Current price list is available on request. Goods normally despatched on receipt of order.



B & S COMPUTING (NOTT) LTD
THE LENTON BUSINESS CENTRE
LENTON BOULEVARD
NOTTINGHAM NG7 2BY
PHONE: 0602 787923

ACORNSOFT

AMAZING OFFERS

ELECTRON BONANZA

FOR THE ELECTRON

VIEW ROM ~~£29.95~~
 Word Processor £14.95
 VIEW SHEET ROM ~~£29.95~~
 (Spreadsheet) £14.95
 ACORN PLUS 1 ~~£59.95~~
 Now in stock! £49.95

SCOOP PURCHASE ELECTRON COMPUTERS IN STOCK NOW

3 months warranty
£59.95

*Includes user guides, power supply
 and introductory cassette

SAVE £££'s ELECTRON PACKS

PACKAGE 1
 PLUS 1 £49.95
 VIEW £14.95
 VIEWSHEET £14.95
~~£79.85~~

OFFER PRICE **£69.95**

PACKAGE 2
 ELECTRON
 COMPUTER £59.95
 PLUS 1 £49.95
 VIEW ROM £14.95
~~£124.85~~

OFFER PRICE **£99.95**

ELECTRON AND BBC

CUMANA DISC DRIVE INTERFACE FOR ELECTRON £69.95

ENABLES YOU TO USE MOST BBC DISCS
 AND CARTRIDGES UP TO 32K

NEW ACORNSOFT OVERVIEW

A sophisticated combination of Viewspell &
 Viewstore on Rom Cartridge and
 Viewplot, View index and Printer Driver
 Generator on Disc

BBC Disc & Rom R.R.P. ~~£98.90~~
 OFFER PRICE **£78.45**

ACORNSOFT VIEW PROFESSIONAL

Combines the functions of a wordprocessor
 spreadsheet and database in one program.

BBC B, & all Master Series Micros
 R.R.P. ~~£99.95~~
 OFFER PRICE ONLY **£79.45**

PRIMARY EDUCATION

*Sentence sequence
 *Word sequence
 *Talkback **£1.50 each**
 *Workshop (CASSETTE)

SPECIAL OFFER — ACORNSOFT

BBC Cassette and Disc

EDUCATION COMPENDIUM


Workshop (3+ years)
 ABC (7+ years)
 SPOOKY MANOR (7+ years)
 TALKBACK (10+ years) SET **£11.96**

Magic Mushrooms Electron £12.95 £2.95
 Me and My Micro (Book Only) £2.95 £1.00

MORE 3.5" COMPACT DISCS

Bug Eyes III ~~£9.95~~ £7.95
 Elite ~~£19.95~~ £15.95
 Repton III ~~£9.95~~ £7.95
 Grand Prix Construction ~~£14.95~~ £11.95
 Strykers Run ~~£14.95~~ £11.95
 Acornsoft Hits Vol I ~~£14.95~~ £11.95
 Acornsoft Hits Vol II ~~£14.95~~ £11.95
 Superior Collect Vol I ~~£14.95~~ £11.95

*BBC COMPATIBLE



SAE for comprehensive price lists
 Please state for which machine

HOME INTEREST

Snapper ~~£6.99~~ *Desk Diary ~~£6.99~~
 Boxer ~~£6.99~~ *Business Games
 *Watch your Weight ~~£6.99~~ *Graphs and
 Theatre Quiz ~~£6.99~~ Charts ~~£6.99~~
 Complete Cocktail Maker ~~£6.95~~

SELECT ANY FIVE FOR ONLY **£7.95**
 (or £1.65 each)

VOLTMACE TWIN JOYSTICKS

for use with Plus 1 or BBC
 Normally ~~£19.95~~
 Now Only **£14.95**

EDUCATION SPECIALS

*Linkword Spanish £14.95 *Maths 'O' Level I £12.65
 *Linkword Italian £14.95 *Maths 'O' Level II £12.65
 *IDO £12.65 *Biology £12.65
 *English £12.65

ANY TWO FOR **£3.95**

RECENT RELEASES AT SPECIAL PRICES

Superior Collection 1 or 2
 BBC only
 Superior Collection 3
 Electron only
 Codename Droid
 Strykers Run
 Crazee Rider
 Palace of Magic
 BBC/Electron Cass ~~£9.95~~ £7.99
 BBC Disk ~~£11.95~~ £9.59
 BBC Compact ~~£14.95~~ £11.99
 Electron 3.5" Disc ~~£14.95~~ £11.99
 Beau Jolly 5 Comp. Hits
 BBC or Electron ~~£6.95~~ £5.55
 Five Star II Repton III
 BBC or Electron Cass £7.95 Disc £9.59
 Cholo (Disk) Firetrack or
 Grand Prix Cons.
 BBC Cass £7.95
 Disk £9.95

MICROPOWER AND OTHER GAMES

| | | | | | |
|-----------------------------------|------------------|----------------------------|------------------|--------------------------|------------------|
| Dennis Through the Drinking Glass | £6.95 | Rubble Trouble | £7.95 | Felix & the Evil Weevils | £6.95 |
| Classic Adventures | £6.95 | Swoop | £7.95 | Frenzy | £6.95 |
| Giroscope | £6.95 | Croaker | £7.95 | Plutonian Plunder | £6.95 |
| Bandits at 3 O'Clock | £6.95 | Bumble Bee | £7.95 | Mr. Ee! | £6.95 |
| Escape from Moon Base Alpha | £7.95 | Positron | £7.95 | Blockbuster | £6.95 |
| Ghouls | £7.95 | Felix & the Fruit Monsters | £7.95 | Microcosm | £3.95 |
| Stock Car | £7.95 | Cybertron Mission | £7.95 | Fatman Sam | £3.95 |
| Killer Gorilla | £7.95 | Moonraider | £7.95 | Star Drifter | £3.95 |

BBC & ELECTRON ANY FIVE FOR ONLY **£7.95** (or £1.65 each)

MICROPOWER MAGIC COMPILATIONS I & II

IN THE CHARTS NOW! 10 ORIGINAL HITS ON EACH
 FANTASTIC VALUE

BBC B/B + /MASTER CASSETTE ~~£7.95~~ £5.95
 BBC B/B + /MASTER 80T DISC ~~£7.95~~ £5.95
 BBC B/B + /MASTER 40T DISC ~~£7.95~~ £5.95
 BBC COMPACT DISC ~~£9.95~~ £7.75
 ELECTRON CASSETTE ~~£7.95~~ £5.75

imogen

A totally NEW Graphic Adventure for the
 Discerning Games Player. Your power of logic
 & resourcefulness will be stretched to
 capacity...

BBC CASSETTE £7.95
 BBC 5.25" Disc (40 or 80T) £8.95
 BBC Master Compact 3.5" Disc £10.95

SCOOP PURCHASE

POWERPACK

7 Great Games by
 Audiogenic
 BBC Cassette
~~£9.95~~ £4.95

Name _____
 Address _____

 Tel. _____ MN

SOFTWARE BARGAINS

(a division of the micropower group)

Dept MN, 8/8A Regent St., Chapel Allerton, Leeds LS7 4PE

Tel: (0532) 687735

Out of Hours Answer Phone

PLEASE ADD 95p P&P
 and make cheques or P.O.
 payable to Software Bargains
 Goods despatched within 48 Hours
 Subject to availability

MOVIE MAKER



BECOME A MOVIE DIRECTOR!

With the **MOVIE MAKER** software package from Slippery Slug ANY user can create impressive animated films or graphics displays.

A flashing pen is moved around on the screen by using the four arrow keys and is used to draw items of background scenery. The screen can be scrolled over the scenery to give a virtually unlimited area.

Use the pen to draw your animated characters, each up to about one quarter screen size. Their movement over the scenery is programmed by simply moving them around with the arrow keys.

SOME MOVIE MAKER FACTS

Text can be used in the form of subtitles, scrolling bubble messages which appear above the character that's speaking, or even as part of the background scenery.

The characters can also be easily programmed to move arms and legs, change colour or shape in any way, and to grow or lose extra parts of any description.

The teletext graphics system has been used throughout. This enables **MOVIE MAKER** to playback your movies at an incredible speed of 22 frames per second. And also enables a single movie to be over 20 minutes in length.

THE MOVIE MAKER PACKAGE

The package contains two 16K ROMS; USER GUIDE; key strip; scenery planning map; and a tape containing a 20 minute demo movie, an intro show, and playback software to run your movies on micros without **MOVIE MAKER** fitted.

Requires a BBC model B, B+, or MASTER micro, tape or disc based. Can be run in sideways RAM.

Mail order price **£29.90** fully inclusive. Or for a detailed description of **MOVIE MAKER'S** extensive facilities send **£1.95** for the introductory pack (price refundable against purchase) which contains an intro tape and brochure.

To: Slippery Slug, PO Box 83, Bath, BA1 1ZA.
Telephone Bath (0225) 69236

Please rush me the following:

Qty **MOVIE MAKER** pack(s) at £29.90 each.

Qty Introductory pack(s) at £1.95 each.

Cheque/PO enclosed for £

NAME _____

ADDRESS _____

Postcode _____

How to get your BBC Micro to talk to an Amstrad

(or a Spectrum or a Commodore or an Atari or an IBM . . . or ANY other computer).

Language problems become a thing of the past when you join MicroLink. Now you can use your BBC Micro (plus your telephone) to send messages to any other computer user, with no restriction on make of machine – or even on distance.

MicroLink *electronic mail and much, much more!*

Details from 061-456 8383

ACORN IN WALES

*** ARCHIMEDES ***

*** MASTER 128 ***

*** MASTER COMPACT ***

everything for the BBC-B Micro and ELECTRON User including

MONITORS – PRINTERS – DISC DRIVES –
UPGRADES – DISKS – PAPER – RIBBONS –
BOOKS – MICE – PLOTTERS – MODEMS – ROMS –
MIDI SYNTHS – STEPPER MOTORS –
DISC STORAGE BOXES

- * Plus software old and new for business, education and leisure. *
- * BBC upgrades, spares, and after sales service * with products for ELECTRON owners too. *
BBC stockist since Acorn split the Atom. *
- * More than just a computer shop – much more *
* If you live in Dyfed, pay us a visit *
* Sorry no catalogue *
* Government and Education orders welcome *
* Still a few ELECTRONS available to callers only *

Access & Visa welcome

CARDIGAN ELECTRONICS

Chancery Lane, Cardigan, Dyfed.

Tel: 0239 614483

Shop hours Mon-Sat 10am – 5pm
Closed all day every Wednesday



The Shape of things to come?

ABOUT DAVID BRABEN

For 23-years old David Braben, computer programming started as a hobby at sixth form college. While studying physics and electrical science at Cambridge University, his hobby developed rapidly into a career stemming from his successful collaboration with a friend and fellow computer programmer, Ian Bell.

Their partnership resulted in the computer industry's most highly acclaimed game, *Elite*, which has earned David well over a six figure income enabling him to buy a flat in Cambridge and a blue Audi Quattro.

He enjoys working on new and challenging programming projects, sailing, music, watching sci-fi films, as well as nipping to his local for a pint of cider. His passion for the film industry goes beyond watching his favourite film, *Alien*, as he hopes to work on computer graphics for both the film and television industry.

Since finishing *Zarch*, a revolutionary and thoroughly unique Archimedes game for Superior Software, he is now working on a follow-up to *Elite*.

David Braben tells

how he came to

write his superb

Archimedes game

SINCE writing *Elite* with Ian Bell, I have had good ties with Acorn, and knew about the ARM project from fairly early on. When, in September 1986, I heard that development machines (known confusingly as A500s, but similar to A440s in specification) were being made, I asked for one for evaluation. I finally had one for two weeks in January.

I had been working on various 3D landscape algorithms on the (old) BBC Micro for the *Elite* sequel, each being either too slow, or not looking good. I realised what could be done on the ARM with these routines, so I wrote *Lander*. This uses one of the simplest techniques, since there was very little time to complete it (about two months) and, at that time, I was not particularly familiar with ARM code.

The tight schedule meant *Lander* had to be fairly simple, hence this was to

appear on the Welcome disc as a taster of a more sophisticated game to follow, once the Archimedes range was available in large numbers.

Rather unfortunately, in my opinion, Acorn registered the name *Zarch* (sounds like a soap powder) which I agreed to stay with on the Archimedes computers. However, the game may be appearing, in a slightly inferior form, on the Commodore Amiga and perhaps the Atari ST under a different name (not STarch).

Lander was conceived as a game which was pretty to look at and involved a great deal of fast motion. Since the player's craft is capable of quite high speeds, a high frame rate is needed to avoid objects moving with too great a step size and spoiling the sensation of motion.

Because of the restrictions of the particular landscape routine chosen — a fixed tile size — the view cannot go very far to the horizon before there is a serious speed loss.

Also speed considerations restricted the direction of view to a constant (to avoid the overhead of additional rotating and clipping), although on very early versions of the game this was not the case (this code was used to produce the

Union Jack demo, which can rotate about any axis).

Together, these problems meant a first person view, as in Elite, was not practical with the tight schedule, so the third person view of Lander and Zarch was used.

With the display technique chosen, the frame rate dictated the approximate number of tiles which could be used and also the amount of scenery. The display looks much better if these are greatly increased – as the picture on this page shows – but sadly this reduces the frame rate to only one or two frames per second – a succession of stills.

To avoid flickering bank-switching, which uses two screens with all plotting being done to the hidden one, is used. They are switched when a frame is finished. However, this requires twice as much screen memory.

Both Lander and Zarch use Mode 13, a 256 colour equivalent of Mode 1. There was almost no choice as to the screen mode to use, since 256 colours gives the required scope for shading and lighting, and there is no (hardware) lower-resolution with this number of colours available. (Mode 10, the 256 colour Mode 2, is really Mode 13, but with the operating system plotting double pixels, so there is no advantage using this mode.)

Mode 15, a 256 colour Mode 0 was not used for two reasons. Firstly, it doesn't leave much memory on an A305 (320k for both screens). Secondly, the video chip VIDC uses up memory bandwidth in the higher memory modes, and so slows down the processor.

Since it would also require the graphics routines to plot a greater area, the game would run significantly slower, so less detail could be plotted.

The graphics on Zarch and Lander are quite simple. The hidden line removal routine uses an Elite-like method to filter out some of the triangles, and then depth sorts all the graphic elements, including particles before plotting them. This means that shapes go in front of each other in the correct fashion.

The problem with sorting is it is normally a relatively slow process. The simplest techniques, such as bubble sorting, take of order n^2 operations, where n is the number of objects. In Zarch, this can be several thousand, so even on an ARM, it could take over a minute a frame.

The best general sorting algorithms such as quicksort, take of order $n \log(n)$ steps, and are still a bit slow. However, since objects only need to be approximately in order, and it is known that the values are in a certain range, a technique known as bin sorting is used.

This involves having a buffer for each

of a range of depth values, and when an object's position is calculated it is put into the relevant buffer. Finally the buffers are flushed in depth order, farthest first. This requires a great deal of memory, but is virtually free as far as time considerations go.

Another technique used is colour keying the depth. This is clearly trivial, but gives a good effect and is achieved by varying levels of white according to the depth of an object in the screen.

This is actually not what would be seen – colour tends to be lost in the distance – but is more effective than the rounding towards grey that might be expected. With only 256 colours the steps seem more blatant with, for example, red suddenly becoming grey.

Shadows are almost essential; it is surprisingly hard to judge height without them. They are also quite easy to simulate if you are allowed a little artistic licence. Firstly each node of each shape is projected on to the landscape vertically, for speed, then they are projected to the screen in the normal fashion, and joined up with black triangles.

This method is clearly incorrect since it does not allow for the curve of the landscape, nor does it allow for scenery – no, shadows don't go over houses or other shapes.

All shapes are lit from above and slightly to the left to give a better 3D effect, and to emphasise the shadows. This is done by calculating the angle between a light ray and each face of the shape. The brightness of the face is then some function of that angle. Lander and

Zarch use:

$$\text{Brightness} = k * \text{SIN}(\text{angle})$$

$$\text{FaceColour} = \text{BaseColour} + \text{Brightness} * \text{White}$$

Where k is the number of shades available for lighting, and *White* is the smallest amount of white available.

The advantage of a relatively simple game like Zarch is that it can be broken up into a small number of major routines each of which has a well defined task:

| | |
|------------------|------------------------------------|
| Animate object | nasties, player, missiles |
| General particle | bullets, debris, parachutes, spray |
| Landscape | |
| Scenery | trees, houses, radar |

The object routine has a list of objects, each of which have a list of attributes including position, velocity and a driving routine pointer. This makes the code very simple indeed.

The driving routines are called every game cycle for each object, and these routines, different for each object type, take care of the behaviour of that object. This leaves the object routine loop to do such things common to all as plotting and hit checking.

The particle routine, although similar in principle to the object routine, has more compact data, and rather than call a routine for each particle, each has a

Turn to Page 18 ►



How Zarch might have looked: A display technique that was rejected

FEATURE

◀ From Page 17

flags word with each bit determining some aspect of its behaviour. Some of these are shown in Figure 1.

This makes for simple but powerful code, testing the appropriate flags with a mask where necessary. The object routine and the particle routine could have been combined, but this was not done for memory considerations, as there may be many hundreds of particles at any one time.

The landscape routine obtains the rolling hillside effect by simply adding a set of pseudo-random sine waves, which are clipped at a fixed height to give the water. As a look-up table is used to calculate the sine values, this technique is very fast. The landscape is a bit too uniform without the water, which of course is very easy to add.

It is all very well having a collection of impressive graphics routines, but for a commercial game they must be linked by a consistent, fun-to-play scenario. Lander perhaps falls some way short of this, but Zarch can be quite addictive.

Zarch is definitely in the quick reaction, shoot-em-up category, and so will perhaps have a shorter commercial lifetime than, say, Elite. It is very hard to play at first. The mouse controls are very different to other games, but once you get the hang of flying the craft it is quite satisfying – and there is scope for some fancy flying.

The demo mode shows how easy, in principle, the craft is to fly. It works by intercepting the mouse-reading routine, calculating a sensible path to fly along, and returning values for the mouse position and button presses, as if they had come from the mouse reader.

This requires less than a screenful of ARM (Basic assembler) source code, admittedly using multi-statement lines (single statement lines are for people with shares in timber companies, or weenies who insist on writing a paragraph of comments on each instruction). What is surprising is it generally does

better than a human player.

The idea behind the game is straightforward. Nasties spray red gunge across a landscape which the player is attempting to protect. This gunge affects different foliage in different ways. Some types are unaffected, some die, and some mutate.

There are two reasons the player shouldn't be keen on this happening: It reduces the bonus score at the end of every attack wave, and the nasties use these mutated plants to mutate themselves. The player can of course destroy any foliage, but usually it is very hard to keep up with the bad guys' spray rate.

In the time honoured tradition, the bad guys get nastier and more numerous as the player progresses, and there are hillier landscapes, which make flying fast and low quite hard.

Other frills are increasing gravity, and radar stations which, if destroyed, leave a hole in that region on the player's scanner. There will be a competition, hence there is an Elite-like competition entry number and silly message, for those players who get sufficiently far.

In my opinion the Archimedes series are great machines, and Zarch does not exploit their full potential. I expect that before long there will be more impressive games from other programmers who have had more time. Such techniques as real-time ray tracing, to show things like reflections, may be possible for simple scenes.

However, the Archimedes is not perfect. As far as programming goes, the operating system interface is simple to use, but the lack of true multi-tasking may cramp the style of later applications.

Perhaps more significant, given the adherence to compatibility, is the sound interface, which is poor given the power of the hardware. There are no BBC Micro-style sound envelopes, as far as I know, and it is not possible to dynamically change sound parameters, to give, for example, a slowly rising note, with the current operating system – a step

backwards from the old BBC Micro.

It is a shame that Acorn chose to release their smallest machine with only 512k of memory, since it will tend to restrict early applications.

Although this may seem a great deal of memory, which it undeniably is for Basic programs, the sort of applications that the speed of the processor make possible, such as Zarch, tend to eat large areas of memory for look-up tables and workspace, especially when using the hi-res screens.

Also, ARM machine code tends to be significantly larger than 6502 code for the same function, so running compilers is probably out of the question on an A305 (the C compiler is over 250k long, without libraries). Before long, it will probably have the unsupported Model A status of the past, since the upgrade to an A310 is relatively cheap and easy to do.

I expect that there will be some very impressive applications for these machines, particularly CAD. The A440 compares well with a Dec MicroVax (similar in power to an 11/780) for integer operations, and presumably floating point will follow with the release of the floating point co-processor.

The reason such machines as the MicroVax are still superior is the tremendous software base, especially the high quality of the optimising compilers. If Acorn was to bundle a good optimising compiler – C perhaps? – with the A400s, or at least if one were available, this might do a lot for the machine.

It seems that nowadays a large proportion of the market judges the quality of a game by its graphics rather than the depth of play. Because of this, most software houses are moving their emphasis from 8 to 16/32 bit machines for prestigious new releases.

This seems a shame for those people with 8 bit machines, where their potential has still not been fully exploited, particularly in the area of disc-based games and use of additional ram.

Certainly with the sequel to Elite we intend to support the BBC Micro/Master range. I have also seen a pre-release BBC Micro game from Peter Irvin (Starship Command) and Jeremy Smith (Thrust) which is potentially superb – watch out for it.

Ultimately, it seems likely that the games and the film industry will converge – presumably with the latter absorbing the former. This should be quite fun (interactive Bond films?) but is a little way away yet. Nevertheless, the Archimedes is a step in the right direction.

| | spark | spray | bullet | parachute | smoke | virus | debris |
|-----------|-------|-------|--------|-----------|-------|-------|--------|
| gravity | YES | YES | YES | NO | NO | YES | YES |
| bouncing | YES | NO | NO | NO | NO | NO | YES |
| splashing | YES | NO | YES | YES | NO | YES | YES |
| fading | YES | NO | NO | NO | NO | NO | NO |
| hitting | NO | NO | YES | YES | NO | NO | NO |
| exploding | NO | NO | YES | YES | NO | NO | NO |
| mutating | NO | NO | NO | YES | NO | YES | NO |
| swinging | NO | NO | NO | YES | NO | NO | NO |

Figure 1: Some of the particle behaviour flags

Get knitting on your micro with *Knitwear Designer*

Now you can use your BBC Micro or Electron to design perfectly-fitting knitwear – then print out the complete pattern.

It's the biggest development since the home knitting machine – and it's so simple to use. Now anyone can use a computer to design knitwear to individual measurements and then produce row-by-row knitting instructions on the printer.

YOU CAN:

- Work with any yarn, from fine cottons to chunky wools
- Enter your natural tension and the pattern adjusts to the way you knit
- Select from three preset patterns – Raglan sleeve, drop and square shoulder
- Use the Freehand program to produce custom designs

Say goodbye to badly-fitting home knitting. With one of the five programs included in the package, and using the clearly written manual, you can produce perfect results every time.

The program itself produces a plain knit, leaving you to use your own favourite stitch pattern, such as the Fair Isle design featured here.

£8.95
Cassette

Also available on disc for use on the Advanced Plus 4 and Slogger SEDFS.

£9.95
5 1/4" disc

DATABASE PUBLICATIONS



To order please turn to the form on Page 149

5% OFF!


5% DISCOUNT TO BEEBUG MEMBERS ON ALL HARDWARE/SOFTWARE

Only if you quote your membership number

The products in this price list are available in our showroom in St. Albans and by mail order. Telephone your order on 0727 40303 or send the order form to:

BEEBUG MAIL ORDER
Dolphin Place, Holywell Hill,
St. Albans, Herts AL1 1EX

Tel: 0727 40303—Multi-Lines
Alternatively come along and see us. We are open Mon-Sat 9-5.30 and Thursday 9-8.00pm

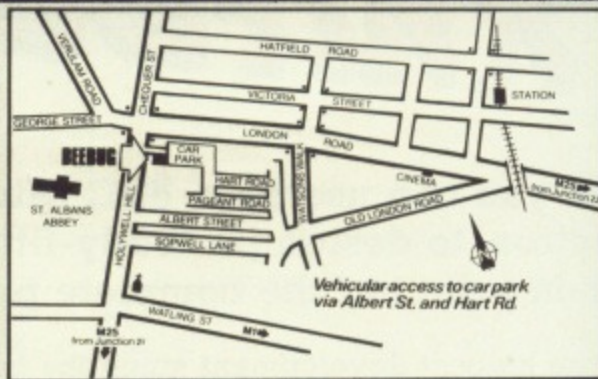

ORDERS CAN NOW BE PLACED VIA MICRONET.
SEE US ON PAGE 800909 OR SIMPLY TYPE "BEEBUG#"

PRICES INCLUDE VAT.

THERE ARE TWO PRICES LISTED BELOW FOR EACH ITEM. THE FIRST IS OUR NORMAL PRICE, THE SECOND OUR MEMBERS PRICE.

Archimedes 300 Series Now available ex-stock

When buying a new Archimedes we will give you absolutely free: "Zarch" the complete Lander game, Printer lead and Lockable 3.5" disc box with 10 discs all worth over £60.

ARCHIMEDES 300 SERIES

| | |
|-----------------------------|---------|
| 0190G BBC 305 Entry System | 918.85 |
| 0192G BBC 305 Colour System | 1148.85 |
| 0193G BBC 310 Entry System | 1006.25 |
| 0195G BBC 310 Colour System | 1236.25 |

Please telephone for a full colour brochure on the Archimedes.

ARCHIMEDES 400 SERIES

| | |
|-----------------------------|---------|
| 0260G Archimedes 410 Entry | 1608.85 |
| 0261G Archimedes 410 Mono | 1666.35 |
| 0262G Archimedes 410 Colour | 1838.85 |
| 0263G Archimedes 440 Entry | 2643.85 |
| 0264G Archimedes 440 Mono | 2701.35 |
| 0265G Archimedes 440 Colour | 2873.85 |

ARCHIMEDES ACCESSORIES

| | | |
|--------------------------------|--------|--------|
| 0266C 0.5Mb RAM (305 only) | 102.35 | 97.23 |
| 0267F Second Floppy Disc Drive | 143.75 | 136.56 |
| 0268G 20Mb Hard Disc (300's) | 573.85 | 545.16 |
| 0269C Podule Backplane | 44.85 | 42.61 |
| 0270D ROM Podule | T.B.A. | T.B.A. |
| 0271D I/O Podule | T.B.A. | T.B.A. |
| 0272D MIDI add-on to I/O | T.B.A. | T.B.A. |
| 0425B Archimedes Printer lead | 10.47 | 9.95 |
| 0505G Multi-Sync Taxan Mon. | 668.42 | 635.00 |

**Master 128
and Compacts**
Down in Price
Master 128 only £414.11
Compact Colour System- £546.25

| | | |
|-----------------------------|--------|--------|
| 0200G Master 128 | 435.91 | 414.11 |
| 0199G Compact Entry System | 375.00 | 356.25 |
| 0196G Compact Colour System | 575.00 | 546.25 |

| | | |
|-------------------------------|--------|--------|
| 0227F Second 3.5" Disc Drive | 108.00 | 102.60 |
| 0201B Compact RS232 Interface | 29.90 | 28.41 |
| 0211C PAL TV Adaptor | 29.90 | 28.41 |
| 0250C Compact 5.25" Disc Lead | 12.32 | 11.70 |
| 0298B Compact Printer Lead | 9.77 | 9.29 |
| 0240C M128 Manual 1 ADJ22 | 14.95 | 14.20 |
| 0241C M128 Manual 2 ADJ23 | 14.95 | 14.20 |
| 0242C M128 Adv. Ref Man. | 19.00 | 18.05 |
| 0234B M128 Econet Module | 48.88 | 46.43 |
| 0235B M128 Eprom Cartridge | 15.18 | 14.42 |
| 0781B Care Elec. Cartridge | 8.95 | 8.50 |
| 0782B Care 4 Way Cart. | 14.95 | 14.20 |
| 0783B Peartree MR8000 Cart. | 45.95 | 43.65 |
| 0230C 65C102 6502 "Turbo" | 119.00 | 113.05 |
| 0231D 80186 Co-Processor | 228.85 | 217.41 |
| 0233F Universal 2nd Proc. | 83.00 | 78.85 |
| 0207A Basic II ROM | 21.85 | 20.76 |
| 0208A 1.2 Operating System | 10.06 | 9.56 |
| 0209B 1.2 DNFS ROM | 19.78 | 18.79 |
| 0212B Acorn Speech Upgrade | 46.00 | 43.70 |
| 0217B 1770 Disc Interface | 50.24 | 47.73 |
| 0218A ADFS Upgrade 1770 | 29.33 | 27.86 |
| 0225B Econet Upgrade BBC | 48.00 | 45.60 |
| 0226B 64K Upgrade Kit B+ | 39.00 | 37.05 |

PRINTERS

| | | |
|--------------------------|--------|--------|
| 0299G Panasonic KX-P1081 | 180.00 | 171.00 |
| 0304G Panasonic KX-P3131 | 290.53 | 276.00 |
| 0311G Taxan KP815 | 342.11 | 325.00 |
| 0316G Taxan KP915 15" | 440.00 | 418.00 |
| 0322E Epson LX800 | 275.00 | 261.25 |
| 0327G Star NL-10 | 285.00 | 270.75 |
| 0328G Epson FX800 | 405.00 | 384.75 |

DUMPMASTER II ROM
A sophisticated package that produces high quality screen dumps for all above dot matrix printers.
Code 0053B Price £31.00

MONITORS

| | | |
|----------------------------|--------|--------|
| 0501G Taxan KX118 Green | 100.00 | 95.00 |
| 0502G Taxan KX119 Amber | 100.00 | 95.00 |
| 0503G Zenith 123 12" Green | 83.00 | 78.85 |
| 0530G Microvitec 1431 Mon. | 239.00 | 227.05 |
| 0531G Microvitec 1451 Mon. | 289.00 | 274.55 |
| 0505G Multivision 770 Plus | 668.42 | 635.00 |
| 0535G Supervision 625 RGB | 379.50 | 360.53 |
| 0536G Supervision 620 RGB | 318.55 | 302.62 |

Prices Include VAT. There are two prices listed below for each item. The first is our normal price, the second our members price.

DISC DRIVES

| | | |
|------------------------------|--------|--------|
| 0224G Master Disc Drive Unit | 316.00 | 300.20 |
| 0600F Cumana CSX100 40 | 106.95 | 101.60 |
| 0610F Cumana CS100 40 | 126.50 | 120.18 |
| 0614F Cumana CS100E | 118.45 | 112.53 |
| 0601G Cumana CDX200 40 | 215.00 | 204.25 |
| 0602F Cumana CSX400 40/80 | 142.60 | 135.47 |
| 0603F Cumana CS400 40/80 | 162.15 | 154.04 |
| 0615F Cumana CS400E | 155.00 | 147.25 |
| 0604G Cumana CD800S 40/80 | 286.35 | 272.03 |

C

The Language C is now available from Beebug for all users of the BBC Micro and Master. Beebug C conforms to, and extends beyond the Kernighan and Ritchie standard, producing fast, compact code and supporting full floating point maths.

Code 0075B Price £59.00
Members price £44.25

OTHER HARDWARE

| | | |
|---------------------------|-------|-------|
| 0701B Aries B32 RAM Card | 93.15 | 88.49 |
| 0740B Aries B12 ROM Board | 46.00 | 43.70 |
| 0749B Aries B12C Adaptor | 5.87 | 5.57 |
| 0704B ATPL ROM Board BBC | 39.67 | 37.69 |
| 0746B Ditto for BBC B+ | 33.35 | 31.68 |
| 0735B ATPL Battery Backup | 17.37 | 16.50 |

The products listed here are only a small selection from our extensive range. Please telephone and ask for an information pack which includes a Retail Catalogue and details of BEEBUG.

| | | |
|--------------------------------|-------|-------|
| 0705A 2764 8K EPROM | 2.64 | 2.51 |
| 0706A 27128 16K EPROM | 6.75 | 6.41 |
| 0707A 6264 8K RAM | 3.68 | 3.50 |
| 0747B U.V. Tube For Eraser | 10.35 | 9.83 |
| 0708A Eprom Extractor Tool | 3.45 | 3.28 |
| 0713A Phone 2 in 1 Adaptor | 6.30 | 5.99 |
| 0714A BBkey strip | 2.09 | 1.99 |
| 0715A Dust Cover BBC B/B+ | 3.45 | 3.28 |
| 0734A Dust Cover Master | 4.60 | 4.37 |
| 0718B Delta 3B Single Joystick | 9.99 | 9.49 |
| 0719B Delta 3B Twin Joysticks | 17.00 | 16.15 |
| 0720B Delta 14B Joystick | 12.50 | 11.88 |
| 0721B Delta 14B/1 Interface | 13.00 | 12.35 |

Second-hand BBC machines with three months warranty available from just £210.

| | | |
|---------------------------------|-------|-------|
| 0773B Delta 3S Compact Joystick | 9.99 | 9.49 |
| 0774B Delta 3S Optical F'back | 18.00 | 17.10 |
| 0741A Delta ASC/B Interface | 8.50 | 8.07 |

RED BOXES

| | | |
|-------------------------------|--------|--------|
| 0764F Red Box Starter System | 129.00 | 122.55 |
| 0765D Red Leader (Controller) | 59.95 | 56.95 |
| 0777B Red Leader Battery B'up | 19.95 | 18.95 |
| 0766D Red One (Socket) | 34.95 | 33.20 |
| 0767D Red Two (Detector) | 34.95 | 33.20 |
| 0778D Red Three (A-D) | 59.95 | 56.95 |
| 0775F Red Five (Siren) | 49.95 | 47.45 |
| 0776B Red Box Project Book | 9.95 | 9.45 |

SPIKE PROTECTION

| | | |
|------------------------------|-------|-------|
| 0770B 13 amp spike plug | 11.99 | 11.39 |
| 0771B 3 way spike adaptor | 15.00 | 14.25 |
| 0772B 4 way spike strip plug | 14.50 | 13.78 |

Please telephone for a free Retail Catalogue

Trade-in your BBC or Master for a new Master or Archimedes. Please telephone for details.

ORDER FORM

ALL PRICES INCLUDE V.A.T.

To claim members prices it is essential to quote your membership number.

| Code | Quantity | Description | Unit | Total |
|-------|----------|-------------|-------|-------|
| _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ |

Name: _____ Sub Total £ _____
 Address: _____ Postage £ _____
 _____ Total £ _____

Postcode: _____ Membership No: _____
 Access/Visa ____/____/____/____ Expiry ____/____

In accordance with our competitive pricing structure, prices are subject to alteration at any time.

Carriage

Carriage is denoted by the letter contained in the stock code. A-50p, B-£1, C-£2, D-£3, E-£3.75, F-£5.50, G-£7. When ordering several items, use the highest price code and half of each subsequent code. For courier delivery use code G.

Official Orders

Orders for £25 or over are welcome from education and government bodies. Alternatively pro-forma invoices are available on request.

Overseas

Please send full price including V.A.T. and U.K. carriage. V.A.T. covers the extra postage and insurance.

Credit Cards

Access and Visa orders are welcome, and may be placed by letter or telephone.

BEEBUG LTD,
 Dolphin Place,
 Holywell Hill,
 St. Albans,
 Herts., AL1 1EX.

☎ (0727) 40303



Computaccount (UK) Ltd
11 High Street, Harborne,
Birmingham, B17 9NT
Tel: 021 236 3455/021 427 9898

We are major supplier to the educational
and health sectors

Please send an SAE for our free extensive catalogue and price list. Hundreds of products listed at excellent prices.



**HIGH PERFORMANCE
COMPUTER SYSTEM**

Call for details on 300
series & 400 series systems

ACORN

NEW MASTER COMPACT series. Standard
system is 128K, single 3.5 inch drive, bundled
software.

- Compact entry system £349.00
- Compact TV system £359.00
- Compact with mono monitor £389.00
- Compact with colour monitor £529.00
- RS 232 interface for compact £26.00
- Extra 3.5in drive for compact £99.00
- PAL TV adaptor for compact £26.00

- Master 128 £379.00
- Master ET £305.00
- Master econet module £43.47
- Turbo upgrade £108.00
- 84K upgrade kit £34.74
- Master 512K upgrade £199.00
- 10 Mbyte Hard disc with filesaver
£1086.95

- 30 Mbyte Hard disc with filesaver
£1608.95
- Eprom cartridges £11.95
- Acorn DNFS kit £82.60
- 1770 upgrade kit £43.42
- ADFS ROM £26.04
- ATPL Sideways RAM/ROM board £39.00
- CONCEPT Keyboard £124.95
- View manual £10.00
- Viewsheet manual £10.00

ACCESSORIES

- LISTING PAPER**
All standard sizes available at very competitive prices. Single and multi-part.
- LABELS**
Various size, 1-across, 2-across, 3-across
- RIBBONS**
for most common printers, Epson, citizen, Star, Amstrad, Juki, Canon etc.
- CLEANING KITS**
For UDU, disc drives and keyboards

DISCS

Full range of 3", 3.5" and 5.25" discs
available at very competitive prices.

AMX

- Please state whether for BBC or Master
- AMX mouse with Super Art ROM £78.00
- Pagemaker £43.43
- Paintpot £13.00
- Desk £21.70
- Super Art ROM £43.43
- Database £21.70
- 3D Zicon £21.70
- Utilities £13.00

ROM SOFTWARE

- Acorn:
View 2.1 £45.00
- View 3.0 £63.00
- ViewPlot (Disc) £25.75
- ViewSpell £33.50
- Viewsheet £45.00
- Viewstore £45.00
- GXR (please state whether for B or B+) £23.00
- ISO Pascal £52.00
- LISP £39.00
- BCPL £46.00
- Logo £52.00
- ADFS £26.04
- Computer Concepts:
Wordwise Plus £40.00
- Printmaster £25.00
- Accelerator £48.00
- Speech ROM £27.50
- Communicator £51.30
- InterWord £48.00
- Intersheet £48.00
- Interchart £28.50
- Interbase £59.00
- Spellmaster £46.00
- Beebugsoft:
Toolkit Plus £33.00
- Wordease £25.00
- ICON master £29.00
- ROMIT £29.00
- Help II ROM £27.00
- Sleuth ROM £27.00
- Exmon II £28.00
- Spellcheck III £32.00
- MUROM £24.00
- Peace:
Commstar £29.57

COMPACT SOFTWARE

- Revs 5 £16.95
- Hits 1/Hits 2 £12.95
- Pascal £59.00
- Citadel £12.95
- Repton 2 £12.95
- Karate Combat £12.95
- Strykers Run/Enhanced Strykers £12.95
- CrataForce £12.95

FLEA MARKET

- All items subject to availability
- EPROM programmer £40.00
- Programming software (ROM) £5.00
- EPROM eraser £24.00
- 1200/75 Modem + Comm software**
£35.00
- Torch Light Pen £25.00
- Plannercalc. Torch CPN format £35.00
- Masterplanner. Torch CPN format £85.00
- IBM user manuals (installation/Basic)
£15.00

MONITORS

- Mono:
Sanyo DM4112 £79.95
- Sanyo DM9112 £126.00
- Philips green Hi-res 7502 £76.00
- Philips amber Hi-res 7522 £82.61
- Zenith green Hi-res 1230 £85.00
- Zenith amber Hi-res 1220 £85.00
- Colour:
Microvitec std-res 1431 £191.00
- Microvitec med-res 1451 £229.00
- Microvitec hi-res 1441 £399.00
- Philips 8533 RGB Med-res + composite
video £251.00
- Monitor cables (state types required)
£3.50
- Master Monitor bridge single height £18.90
double height £25.00

PRINTERS

- DOT MATRIX**
Epson LX800 150cps 80 col NLQ
* NEW * £229.00
- Epson FX800 £324.75
- Epson FX1000 £453.75
- Epson EX800 (optional colour) £457.88
- Epson EX1000 (optional colour) £614.63
- Epson LX80/86 tractor unit £20.00
- Epson LQ 800 180 cps 24 pin matrix
NLQ £479.00
- Epson LQ 1000 180 cps 24 pin 132 col
NLQ £659.00
- Olivetti DM100 80col NLQ 120cps
£225.00
- Olivetti DM280 80col NLQ 160cps
£349.00
- Canon PW1080A NLQ 80col 160 cps
£258.00
- Brother 1109 Par. + Ser. 100cps +
NLQ £209.00
- Brother 1409 Par. + Ser. £349.00
- Brother 1509 Par. + Ser. 180cps +
NLQ £449.00
- Brother 2024 Par./Ser. NLQ 24pin
160cps £750.00
- STAR. Full range stocked. Call for
prices
- Star NL 10 serial NLQ 80 col 120cps
£279.00
- Star NL 10 parallel NLQ 80 col 120cps
£239.00
- Star NX15 NLQ 132 col 120 cps £330.65
- Star SD10 NLQ 80 col 160 cps £330.65
- Star SD15 NLQ 132 col 160 cps £415.65
- Star NB 2415 NLQ 24 pin 216 cps
£645.15
- Star NB15 NLQ 24 pin 300 cps £806.65
- Citizen 120D parallel 120 cps NLQ 80col
£199.00
- Citizen LSP10 120cps Eps/IBM comp
NLQ £225.00
- Citizen MSP10E 160cps Eps/IBM comp
NLQ £296.00
- Panasonic KX-P 1081 £159.00
- Panasonic KX-P 1090 £233.00
- Panasonic KX-P 1092 £315.00
- Panasonic KX-P 1592 £405.00
- Micro-P MP165 NLQ £208.70
- Micro-P MP200 *NEW* £299.00
- Parallel printer cable BBC £9.00
- Parallel printer cable IBM, etc from
£15.00

DAISY WHEELS

- Sanyo PR3000 £199.00
- Sanyo PR5200 £299.00
- Brother HR10 £239.00
- Brother HR15 £349.00
- Brother HR25 £650.00
- Brother HR35 £825.00
- Juki 6100 £279.75
- Juki 6200 £454.00
- Juki 6300 £694.00
- Juki 2200 typewriter/printer £238.00
- Star Powertype 165col 18cps £219.00
- Epson GQ3500 *LASER* £1795.00

**PRINTER
ACCESSORIES**

- Epson FX 80/85 Tractor Unit £32.00
- Epson FX 80/85 Sheet Feeder £125.00
- Epson FX100/105 Sheet Feeder £139.00
- Brother HR sheet feeder £209.00

- Epson MX/RX/FX 80 Ribbons £3.75
- Epson MX/RX/FX 100 Ribbons £4.50
- Canon PW1080/1156 Ribbons £5.00
- Taxan Kaga KP810 Ribbons £5.00
- Citizen printer ribbons £3.99
- All Epson Spares available £POA

Massive range of other compatible
ribbons available

AMSTRAD

- NEW PC1640 all models available from stock
- NEW PC 1512: Prices start at £449 for
basic single drive + mono monitor system. Phone for prices of other systems.
- PCW 8256 £399.00
- PCW 8512 £499.00
- 2nd disc drive for PCW8256 £155.00
- Serial interface for PCW £59.00
- Modem with Chat software £169.00
- Wordstar deluxe £60.00
- Supercalc £43.00
- SageSoft Popular Accounts Plus £130.00
- Dbase II £103.00
- 3 inch discs for PCW's £3.50

DISC DRIVES

- Opus 5802 400k DS 40/80 track £109.00
- Opus 5802DB dual 400k DS 40/80 track
£205.00
- Opus 5802D dual 400k DS 40/80 with
PSU £233.91
- Opus Challenger 256k £179.00
- Opus Challenger 512k £199.00
- Opus DDOS kit £52.12
- Pace PSD1P 100k 40T with PSU
£125.00
- Pace PSD3P 400k 40/80T with PSU
£144.00
- Pace PDD3P dual 400k 40/80T with
PSU £260.00
- Akhtar MDB02E dual 400k DS 40/80T
mounted in monitor stand £285.00
- Cumana CSX100 100k SS 40T £99.00
- Cumana CS100 100k SS 40T with PSU
£129.00
- Cumana CS400S 400k DS 40/80T with
PSU £152.00
- Cumana CD800S dual 400k SS 40T
with PSU £295.00
- Cumana CS354 SS 3.5" with PSU
£121.70
- Cumana CD358 DS 3.5" with PSU
£210.00
- Cumana CCD2000S 3.5" + 5.25" with
PSU £282.17

MODEMS

- Nightingale with Commstar £135.00
- Voyager 11 £99.95
- WS 2000 £108.69
- Modem 1000 (BT approved) Special
Offer £35.00

NEW TORCH RANGE

- Z80 processor board with software
£229.00
- Twin floppy drive unit £283.00
- Both above combined at £459.00
- 20 MB Hard plus one floppy unit £826.00
- 40 MB Hard plus one floppy unit £1125.00
- Massive range of torch software
available.

**SPECIAL SOFTWARE
TORCH TURBO LIBRARY**

Functions & Procedures for Turbo Pascal to
access the power of BBC/Torch facilities
NEWNET
Powerful friendly Torchnet management software
with password protection etc.

DBASE SPECIAL

dBase helper programme now available
for those who do not want to learn
programming in dBase, but need the
powerful facilities quickly.
Price only £40.00

HOW TO ORDER

Payment by cheque to:
COMPUTACCOUNT (UK) LTD

Carriage: Items less than
£50: £2.50: £50-£100: £4.50
Carriage and insurance on
items more than £100: £9.50

NAME
ADDRESS

| Quantity | Item | Price | £ | £ |
|----------|-------|-------|---|---|
| | | | £ | £ |
| | | | £ | £ |
| | | | £ | £ |

Please add VAT at 15% to Total, including Carriage.

Send to Computaccount (UK) Ltd., 11 High Street, Harborne, Birmingham, B17 9NT Tel: 021 236 3455/021 427 9898 TOTAL £.....

Three looks at C

C IS a powerful compiled high-level language with similar control structures to Pascal, but which allows programmers easy access to the machine memory and hardware.

For this reason it has become very popular with systems programmers who use it for developing big machine code programs like operating systems and compilers. However, its range of data handling facilities and control structures make it ideal for almost any application – even writing games.

The original C, by D. Ritchie, was developed from the language BCPL (which is available for the BBC Micro series) and did away with a lot of the ambiguities and unnecessary wordiness of BCPL.

The C Programming Language by Kernighan and Ritchie (Prentice-Hall 1978) is the bible of C and although not an official standard – the ISO standard for C is still being prepared – it is regarded as the one to follow.

While most 16 bit micros, even though released after the BBC Micro, have had C for some time, the existence of BCPL on the BBC Micro seems to have prevented anyone from bringing out this excellent language. Until now. Suddenly three versions have appeared almost simultaneously and this review will help you untangle the choices of which to buy.

Acornsoft C

This version comes in the familiar book/box with a 5.25in disc (80 track only) and a 3.5in disc, a spiral-bound A5 manual of 250 pages and a sheet of configuration notes.

The minimum requirements for this system are either a Model B or B+ with second processor, a B+128, a Master (not necessarily with Turbo) or a Compact.

There are two basic setups: The sideways ram version which loads four rom images into the banks available on the B+128, Master or Compact, or the second processor configuration for BBC

```
C>COMPILE HelloW
Acornsoft-BSC C Compiler V1.00
Including h.stdio
code: 0x0042 data: 0x000E total:
0x0050
C>LINK HelloW
Acornsoft-BSC C Linker V1.00
code: 0x205F data: 0x0218 total:
0x2277
C>HelloW
Hello World !
C>
```

Figure 1: Compiling using Acornsoft C

Steve Turnbull

compares three

versions of this

powerful language

Micro plus second processor or Master Turbo.

And after backing up your disc you can select which version you prefer – in this review I used the rom image version. Having loaded the images and pressing Control+Break, a simple *C enters the Acornsoft C environment.

The manual has a very clean layout and style, using the standard Acornsoft no-frills approach of explaining each fact just once in the appropriate place.

However, if you're not familiar with C (or another similar high-level language) you should not even attempt to read the manual beyond the initial tutorial stage as it will mean nothing. Get a book on C first – appendix E gives a list of suitable material to read. One big chapter covers the use of the editor.

The Acornsoft C environment is simplicity to use: First you write your program using the text editor provided (similar to Edit in the Master). Then to compile and link it (that means turn it into executable code) you follow the steps in Figure 1.

Or the compile-link-run sequence can all be done in one command with:

```
C>COMPILE HelloW -l -r
```

One of the key features of C is the ability to include libraries of pre-written routines into new programs so that a full modular approach to programming can be used.

In Figure 1 the line:

```
Including h.stdio
```

indicates that the standard input and output routines are being included in the program. Acornsoft C provides a complete set of library routines and half

| Acornsoft | Beebug | Brasscourt |
|-----------|---------|------------|
| EDIT | – | *EDT |
| COMPILE | COMPILE | *CC |
| LINK | LINK | *ASM |
| MODE | MODE | – |
| REPORT | REPORT | – |
| SETPATH | – | – |
| SHOWPATH | – | – |
| CLOSE | CLOSE | – |
| TRACE | * | – |

Table 1: Comparison of C Environment commands

the manual is devoted to explaining the routines supplied.

This version of C sticks very closely to the standards that exist and includes many of the enhancements that will be part of the new standard. But it is limited by the configurations it will run on.

Beebug C

I received a pre-release copy of Beebug C so the full packaging was not available. But you get two roms, a dual format 40/80 disc and an incomplete spiral-bound 100 page A5 manual.

The system will run on any configuration of model B, B+ or Master with or without 6502 second processor or Turbo. Once the roms are plugged in and the machine switched on all that's needed is *C to enter the Beebug C environment. No text editor is supplied with this version and you are expected to use a standard word processor that can produce Ascii files.

The manual has a friendly and quite explanatory text (although it is still not a guide to writing C) but only lists the functions available in the library files with a brief description of their operation in my pre-production version.

The operation of the Beebug C compiler is virtually identical to that of the Acornsoft C. The basic commands are identical – see Table 1 – and just as easy to use.

However, Beebug C is about five times faster at compilation and linking than the Acornsoft version and produces code at a fraction the length. This is because only the library routines that are required are compiled, rather than all the routines in the included library file.

Beebug C is just as standard as Acornsoft C and I was left with the confident feeling that programs that compiled on one would compile on the other. The only real difference I could find was in the machine specific operating system calls. The rest of the library – as listed – seemed identical.

One reason for the extremely compact executable code that is produced is that this version makes no attempt to produce stand alone code. The system has a built-in virtual machine and the machine code produced is for this invented machine. To run Beebug C code without the roms you need another program called *rtsys*, which is not supplied with the system and must be bought separately.

Brasscourt C

The Brasscourt package is supplied on disc only with the manual and a copyright protection key. This is a plug which goes on to the user port and has some cross-wiring in a unique pattern: Some of the programs on the disc

◀ From Page 23

require this dongle to be connected before they will work.

This is a fairly simple but effective method of software protection – it's easy to backup the disc, but hard to duplicate the key.

The system is just a series of free-standing programs *run from whichever language you happen to be in and on the latest version the two main programs CC (compiler) and ASM (assembler) will run on both the model B and the Master, with or without second processor/Turbo. There is also a text editor supplied on the disc.

The manual consists of 90 A5 photocopied pages and has a rather didactic style. The second chapter does spend 40 pages explaining the elements of C as a language, but some of the more obscure ideas are poorly covered, leading to confusion.

The system is simple to use but differs radically from what would be considered standard. The compiler is invoked by:

```
*CC sourcefile objectfile
```

However, there is no linking as such involved because what the compiler does is to produce a special compacted

form of 6502 assembler – as if you'd written the code in BBC Basic assembler instead of C. The ASM program then assembles this and any other program that you put into the command line into one 6502 machine code program.

There is another program on the disc which converts a BBC Basic style assembler listing into the compacted version for assembly in the ASM program.

Chapter three starts by stating that while the C library functions exist to provide a standard interface between implementations, the programmer does not need to use them. Only six standard functions are supported, plus the *stdio* header file (which you are recommended not to use).

Although it is true a programmer is not forced to use the standard library, using it makes C programs portable, which is a key element in the language.

While the demo programs from Acornsoft and Beebug each ran on the other system, neither program could be compiled on the Brasscourt system and the Brasscourt program was uncompileable on Beebug C and Acornsoft C.

The only real advantage of this system is that it does produce standalone 6502 machine code directly.

Summary

If you don't need to move your programs from machine to machine, or you're willing to purchase the extra program, then the Beebug version is fast and standard. But for a full blown implementation then (if you have the system to cope) the Acornsoft version will certainly suit. If the Brasscourt C was £20 then I could recommend it to anyone who merely wanted to experiment with C, but as it is the highest priced version, and provides the least, I cannot recommend it at all.

Product: C

Price: £78+vat (Archimedes £99+vat)

Supplier: Acornsoft, 645 Newmarket Rd., Cambridge, CB5 8PD.

Telephone: 0223 214411

Product: C

Price: £59

Supplier: Beebug, Dolphin Place, Holywell Hill, St Albans, Herts, AL1 1EX.

Telephone: 0727 40303


Product: C

Price: £85+vat

Supplier: Brasscourt Ltd., Oakford Farm, Marshfield, Chippenham, Wilts, SN14 8AN.

Telephone: (Mail order only).

INTERACTIVE 3D

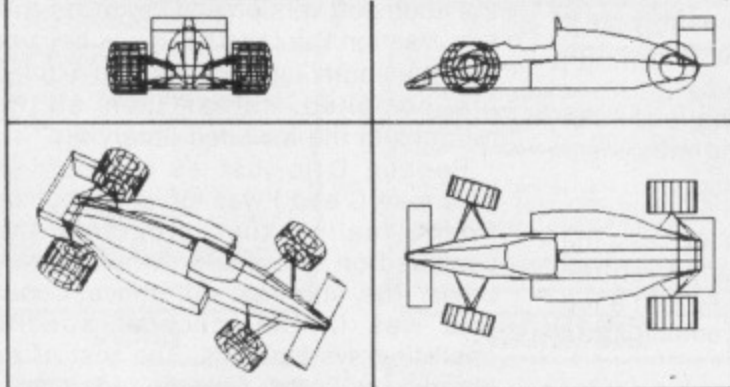

INTERACTIVE 3D is a unique program that actually allows you to create a design directly in a 3D view. And you can zoom, rotate and change view at any time to visualise the effect of design changes. Full editing facilities allow you to create and delete points and lines, and adjust their positions in any direction, all under cursor control without having to enter any numerical data. Circles can be generated automatically and symmetrical forms can be created by reflections. Designs can be saved to tape/disc and reloaded. Views shown on the screen can be saved or printed. Altogether, nearly 50 operations are included. For BBC B, B+ and MASTER series.

- * Acclaimed in reviews (Micro User, Beebug, A&B etc)
- * Widely used in schools, colleges and industry
- * Licenced to Education Authorities
- * Sold in nearly 20 different countries worldwide
- * Probably the most powerful 3D CAD system for any home micro, and at an unbelievably low price

£8.95 cassette £12.95 disc (state 40 or 80 track)

DESIGN DYNAMICS

Cheque/PO to: DESIGN DYNAMICS.(C)
8 Meadow Way,
Amphill,
Bedford MK45 2QX

MODE-ØØ DUMP

640 X 512

RESOLUTION BREAKTHROUGH!

The BBC computers have quite high resolution graphics. The maximum horizontal resolution of 640 is good but the overall effect is spoilt by the mediocre vertical resolution of 256, even in MODE Ø. The same limitation applies to normal screen dumps, so the only way to obtain smooth curves has been an expensive plotter.

Nothing can be done about the screen resolution, but now our unique software, MODE-ØØ DUMP, provides a means of outputting graphics to a dot-matrix printer at an amazing 640 x 512 resolution. All you have to do is add two simple *SPOOL statements to your BASIC or machine code program. All the VDU data used to plot the picture are then saved to disc for use later by MODE-ØØ DUMP. Your program can run in any MODE - even MODE 7! (although then you won't see the results until you run MODE-ØØ DUMP). The dump is in one colour (i.e. as MODE Ø) and covers most of an A4 page.

A useful graph plotting program is included as an example to show you how to add the *SPOOL statements to your own programs.

MODE-ØØ DUMP for BBC B, B+ and Master computers on 5¼" disc.

£12.95 disc only (state 40 or 80 track)

Please note: MODE-ØØ DUMP works with most dot-matrix printers, but if ESC"" is not available (check your printer manual) then you have to omit from the dump 6% of the screen height (either top or bottom).

SPECIAL OFFER: (40 or 80 track disc only)
INTERACTIVE 3D + MODE-ØØ DUMP £20.00

You can save INTERACTIVE 3D pictures to use with MODE-ØØ DUMP

HOMEWORK • REVISION • TUTORIALS

MATHS EXAM?

DIFFERENTIATION & INDEFINITE INTEGRALS:-

SOLUTIONS ON SCREEN!

Watch your problems transformed into worked examples with 'SYMBOLIC CALCULUS' for PAST PAPERS • TEXT BOOKS

In a radical departure from conventional software we offer:-

- STEP BY STEP solutions
- EXPLANATIONS at every step
- Take problems from ANY book or paper
- Superb colour highlighting for clarity

FOR

- Product, Quotient & Chain rules
- Integration by parts
- Integration by substitutions
- e, Logs, SIN, ARCSIN, SINH, ARCSINH etc.

Learn the BEST way – by example.

Maths Workshop

DEPT. MU,
45 Carson Road,
London E16 4BD
Tel.: 01-511 5244

BBC model B only

Please send me SYMBOLIC CALCULUS on cassette (£15.95)/40T disk (£16.95)/80T disk (£16.95). I have BASIC 1/BASIC 2 I enclose a cheque/PO payable to MATHS WORKSHOP

Name

Address

.....

.....

MU1

AUTUMN SALE

PLEASE READ THIS

WHOLESALE PRICES TO YOU THE USER

★ BUY 5.25" DISKS

Plain label by leading manufacturers ie. R.P.S. Wabash etc.

| | 25 | 50 | 100 | 200 | 500 |
|-------------|--------|--------|--------|--------|---------|
| SS/SD 48tpi | £10.00 | £19.00 | £35.00 | £68.00 | £164.00 |
| SS/DD 48tpi | £10.50 | £20.00 | £38.00 | £74.00 | £174.00 |
| DS/DD 48tpi | £11.00 | £21.00 | £40.00 | £78.00 | £190.00 |
| DS/DD 96tpi | £11.50 | £22.00 | £42.00 | £82.00 | £200.00 |

All above inc. envelopes, label sets and hub rings
UK MADE Library cases bought with above only £0.95 EACH

3.5" DS/DD DISKS

Plain label. Made in Japan

| | 10 | 20 | 50 | 100 | 200 |
|--|--------|--------|--------|---------|---------|
| | £15.00 | £26.00 | £64.00 | £110.50 | £198.00 |

LOCKABLE DISK BOXES AND LIBRARY CASES

| | |
|--|--------|
| 5.25" 10 Capacity Ref. VIS 10 Library case | £1.30 |
| 5.25" 50 Capacity Ref. YU-DD50L | £7.50 |
| 5.25" 100 Capacity Ref. YU-DD100L | £10.00 |
| 3.5" 10 Capacity Ref. MCS 10 | £1.30 |
| 3.5" 40 Capacity Ref. YU-DD40L | £8.50 |
| 3.5" 80 Capacity Ref. YU-DD80L | £9.75 |

SPECIAL OFFERS

★ EXCEPTIONAL VALUE ★

25 5.25" DS-DD DISKS PLUS 100 CAPACITY LOCKABLE DISK BOX FOR ONLY £17.60

OR



50 5.25" DS-DD DISKS PLUS 100 CAPACITY LOCKABLE DISK BOX FOR ONLY £27.10

OR

20 3.5" DS-DD DISKS PLUS 40 CAPACITY LOCKABLE BOX FOR ONLY £29.50

OR

50 3.5" DS-DD DISKS PLUS 90 CAPACITY LOCKABLE BOX FOR ONLY £68.20

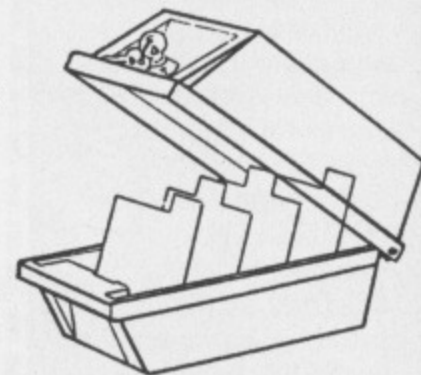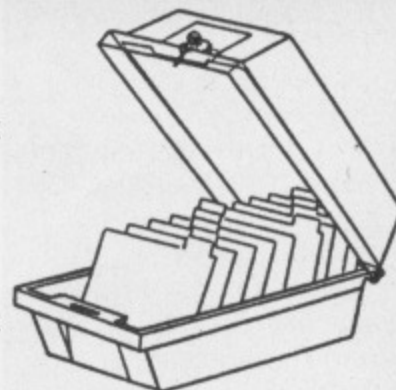

REMEMBER THE PRICE YOU SEE IS ALL YOU PAY (UK ONLY). THEY INCLUDE VAT AND CARRIAGE

Cheque or Postal Order to:



Manor Court Supplies Ltd

Dept MU9, Glen Celyn House, Penybont, Llandrindod Wells, Powys LD1 5SY
Telephone: 0597 87784 or 0597 87792

Orders accepted from educational & government depts. Dealer enquiries invited.

SOLIDISK

for everything from
**Acorn
Computers**

With a little More!

Open hours:

Shop and showroom:
Monday to Saturday, 9.30am to 5.30pm
Mail order and Services:
Monday to Friday, 8.30am to 5.30pm

ARCHIMEDES:

| | |
|--|-------------|
| A-305 basic with 0.5MB of RAM | £799 + VAT |
| A-310 basic with 1.0 MB of RAM | £875 + VAT |
| A-305 model 3 with 1.5 MB of RAM | £919 + VAT |
| A-305 model 4 with 2.0 MB of RAM | £1039 + VAT |
| A-305 model 5 with 2.5 MB of RAM | £1045 + VAT |
| A-305 model 6 with 4.0 MB of RAM | £1245 + VAT |

**BEST PRICE
PROMISE!
£1086 + VAT**



WITH 1.5 MB OF RAM!

Complete ARCHIMEDES 305 systems with a unique choice of RAM size, disc drives and monitor to fit your requirements.

- 6 possible RAM sizes: from 0.5 MB to 4 MB.
- 3 possible disc drive systems: single 3.5", twin 3.5" or one 3.5" and one 5.25" drives.
- 3 monitors: 12" green, 14" Acorn colour or 14" NEC Multisync high resolution colour monitor.

The Archimedes A-305 is a big feature micro with a huge potential. Our package prices for any complete Archimedes system (computer, drive and monitor) are the best around. The picture on the left shows a typical system comprising the A-305 upgraded to 1.5 MB of RAM, 3.5" drive, Acorn 14" colour monitor, mouse and free software. Price: only £1,086 + VAT (£1,249 inclusive).

Data sheets on the Archimedes range are available on request.

**It's Easy
To Masterise
Your Beeb**

**With Solidisk
Add-Ons!**

The Master wins over the BEEB on the provision of the Advanced Disc Filing System (ADFS), a Real Time clock, more memory and two internal co-processors.

Your BEEB can now gain those features and even beat the MASTER on the same ground with Solidisk add-ons. They are intelligently designed to use a minimum number of components, to occupy a minimum space inside the BEEB, to work together and with Acorn peripherals.

We work hard to keep prices low, so that it's much cheaper to upgrade your BEEB than exchanging it for a MASTER. As your BEEB retains its original features (such as an 8271), it can run more software too!

**If you want
to know more,
Ask for the
data sheets!**

WD-1770 DFS:

The new Acorn Disc Filing Systems DFS and ADFS require both the WD-1770 chip. Solidisk offers two basic WD-1770 models which are totally compatible with the Acorn DFS/ADFS ROMs. We also offer our own DFS 2.2 and ADFS 2.1 ROMs which have a superset of utilities and commands. Data sheets on these ROMs are available on request.

1) WD-1770 DUAL DENSITY DISC INTERFACE for previously tape based BEEB. This is the standard Acorn disc upgrade since 1985. Prices are:

| | |
|--|-------------|
| WD-1770 DDFS without DFS ROM | £35.00 inc. |
| WD-1770 DDFS with DFS 2.2 ROM | £45.00 inc. |
| WD-1770 DDFS with ADFS 2.1 ROM set | £55.00 inc. |

Data sheet available on request.

2) WD-1770+8271 (DFDC) DISC INTERFACE: for BEEB already equipped with the 8271. This system allows you to keep the existing 8271 disc interface while adding the new WD-1770 chip. It has a simple switch to allow changing between the 8271 and the WD-1770. To operate the hardware, you will need either the latest ROMs from Acorn (8271 DNFS 1.2, 1770 DNFS and 1770 ADFS) or Solidisk ROMs. If you are stuck with old or inappropriate DFS software, buy the inexpensive DFS 2.2 ROM. Prices are:

| | |
|--|-------------|
| DFDC without DFS ROM | £45.00 inc. |
| DFDC with DFS 2.2 ROM | £50.00 inc. |
| DFDC with ADFS 2.1 ROM set | £55.00 inc. |
| DFDC with 2.2 and 2.1 set (3 ROMs) | £63.00 inc. |

Data sheet available on request.

SOLIDISK TWOMEG 128K:

The new style TWOMEG 128K memory combines Sideways RAM, four EPROM sockets and Shadow RAM on a single board, running at the same 2MHz speed at the BEEB. As you can imagine from the picture, it's unobtrusive and very easy to fit, just drop in and go. It's the ideal memory upgrade for all BEEBs. With plenty of ROM sockets (4 on the motherboard and 4 on the TWOMEG board) and 128K of additional RAM, it beats the MASTER hands down. We supply five software discs to support this excellent product. Price £60.00 inc.

SOLIDISK FOURMEG 32K UP TO 256K:

SPEED, Sideways RAM, shadow RAM and 4 or 5 H/C ROM sockets are combined on the features laden Solidisk FOURMEG series. All FOURMEG boards have a 4MHz GTE 65C02 CPU as standard, same as on the Acorn TURBO co-processor. The new CPU can run BASIC 4 (and many other languages) at twice the speed of the MASTER or the COMPACT.

Its performance is comparable to a MASTER fitted with the TURBO board (costing a great deal more). New reduced prices:

| | |
|--|--------------|
| FOURMEG 32K, 32K RAM, 5 H/C ROM sockets, software support on disc | £60.00 inc. |
| Additional 32K RAM chip, optional, each | £15.00 inc. |
| FOURMEG 256K, 256K RAM, 4 H/C ROM sockets, software support on disc, new low price | £100.00 inc. |
| Software support disc, volumes 2 to 15, each | £2.00 inc. |

Please specify 40 or 80 track disc formats.

Data sheet available on request.

SOLIDISK REAL TIME CLOCK:

The Real Time Clock can be plugged into any ROM socket on the BEEB motherboard with absolutely no wire attached. The Real Time Clock provides battery-backed TIME function (even usable with BASIC 4) and *CONFIGURE. Price £29.00 inc.

Data sheet available on request.

SIDEWAYS-RAM BOARDS:

Sideways RAM can be used to load ROM images into the BEEB, make a printer buffer, store data and programs etc. Sideways RAM are additional memory to the basic 32K of the BEEB. To date, more than 50,000 BEEBs have been fitted with Solidisk Sideways RAM.

| | |
|---|-------------|
| SWR32, 32K Sideways RAM + software disc No 1 | £20.00 inc. |
| SWR64, 64K Sideways RAM, two H/C EPROM sockets + software disc No 1 | £30.00 inc. |
| 96K extension to SWR32 | £25.00 inc. |
| SWR128 new style, 128K Sideways RAM, 2 H/C EPROM sockets + software disc No 1 | £45.00 inc. |
| Software discs from 2 to 15, each | £2.00 inc. |

Please specify 40 or 80 track disc format.

Data sheet available on request.

ELECTRON EFS: LAST FEW!


This excellent product combines a disc interface with DFS and ADFS, Solidisk Winchester port and 16K Sideways RAM. Price £50.00 inc.



WD-1770 DFS



WD-1770 + 8271




TWO MEG 128



REDUCED!



SPECIAL OFFERS!





LAST FEW!

Address:

Shop and showroom:
87 Bournemouth Park Road,
Southend.
Mail order and Services:
17 Swayne Avenue,
Southend SS2 6JQ

Telephone:

Shop and showroom:
Southend (0702) 616 818
Mail order:
Southend (0702) 354 674
Technical Services:
(0702) 43 11 22

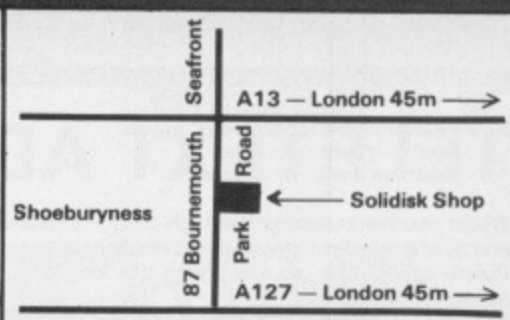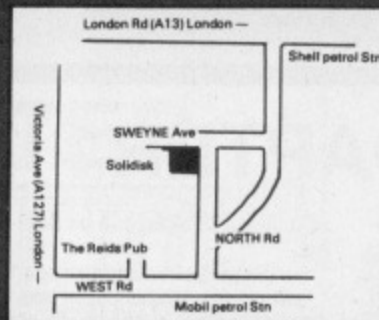**MASTER:**

Our typical MASTER systems comprise the MASTER with 128K RAM, wordprocessor, spreadsheet, ADFS 2.1 cartridge and choice of drives and monitors.

- A — twin 3.5" drives.
- B — twin 5.25 drives.
- C — one 3.5" and one 5.25" drive.

The price of the complete system depends on the choice of monitor:

- without monitor: £640.00
- with 12" green or amber monitor: £730.00
- with 14" colour (Philips CM8833 or Acorn) monitor: £840.00

Free demo disc with each system.
Data sheet available on request.

**COMPACT:**

Our Master Compact systems comprise the COMPACT with 128K RAM, CDFS 2.1 ROM, the same choice of disc drives as with our MASTER systems and choice of monitor.

- with TV modulator £499 inc.
- with 12" green Acorn monitor £599 inc.
- with 14" colour Acorn monitor £759 inc.

Free demo disc with each system.

THE PC-500:

The PC-500 is just what you need to take advantage of the biggest software investment on earth: PC software, PC public domain and PC shareware.

The PC-500 is the Acorn 80186 internal co-processor for the MASTER adapted by Solidisk with an appropriate lead for use on the BEEB (and the Master).

It has a mouse, 512K of RAM, 10MHz — 16 bit CPU (around 3 times the speed of the normal PC), 4 software discs containing the Digital GEM operating system, a wordprocessor, a painting program, CPM emulator and other utilities.

Price: £239 inclusive. Your BEEB must have a WD-1770 and ADFS.

Data sheet available on request.

THE PC-PLUS:

The PC-PLUS is an expanded PC-500, with one Megabyte of RAM instead of 512K. The extra memory allows large applications such as Desk Top Publishing (eg Fleet Street Editor) to be used on the BEEB or the MASTER.

The PC-PLUS is supplied with the same accessories as the PC-500 including the mouse and 4 discs. Price £339 inc.

Upgrade from an existing Acorn 80186 costs £119.00 but you will be required to sign a service agreement. Please ring for details.

Data sheet available on request.

TURBO-BEEB:

The TURBO-BEEB plugs directly into the TUBE connector of your BEEB and consists of the Acorn TURBO 64K, 4MHz 65C02 internal co-processor for the MASTER adapted by Solidisk with an appropriate lead for use on the BEEB (and the Master), like the PC-500. Price £135.00 inc.

Data sheet available on request.

MASTER MEGA CARD:

The MEGA CARD (256K) plugs into a cartridge slot on the MASTER and adds instantly 256K of RAM. The card can be used as RAMDISK, printer buffer or sideways RAM. Price £100.00 inc.

Data sheet available on request.

MASTER ROM CARTRIDGE:

Our MASTER ROM CARTRIDGES can accommodate all software EPROM/ROM useable on the MASTER. They are small enough to be kept permanently inside the computer if you wish. Thus capable of accommodating bulky ROMs such as Interword and Interbase or protecting your ROM from being 'borrowed'. Price £4.00 without plastic case, £5.00 with plastic case. Prices start as low as £1 each for large quantities.

SPECIAL DRIVE LEADS:

We have 3 different DRIVE SPECIAL LEAD SETS to accommodate two 3.5" drives or two 5.25" drives or one of each. Each set comprises a special data lead and a special power lead.

- BEEB or MASTER £15.00
- COMPACT £17.00
- ARCHIMEDES £16.00

IMPORTANT NOTICE ON TRADE UP:

Solidisk will accept return of STL memory board up to one YEAR old for TRADING UP. The selling price (below) is the price we sell at the time of the trade-up transaction. In all cases, the minimum balance must be at least £25.00 inclusive of VAT.

| Age | Trade-up allowance |
|-----------------|----------------------|
| Up to 3 months | 90% of selling price |
| Up to 6 months | 75% of selling price |
| Up to 12 months | 50% of selling price |

BEST PRICE PROMISE:

We guarantee that our prices on selected systems are THE BEST and to prove it, we promise you that if you find the same system sold cheaper by any other officially listed Acorn dealer within ten days of your purchase, we will refund you the difference. Our PRICE PROMISE does not affect your statutory rights.




MASTERPLAN:

If you are thinking of exchanging your BEEB for a MASTER or an ARCHIMEDES, Solidisk MASTERPLAN is for you. We can quote immediately over the phone the buy-back value of your BEEB and the balance on your new system. So please give us a try!

ORDERING BY POST:

All items can be ordered by post, sending the coupon below and enclosing cheques, POs, drafts or credit card numbers or by phone. P and P is charged as follows:

- Less than 1 KG (eg software, cartridges and books): £2.00
- Up to 3 KGs (eg single disc drives): £3.00
- Up to 10 KGs (eg computer, monitors, printers, twin disc drives): you can specify either parcel post £6.00 or courier/Datapost: £12.00.
- Above 10 KGs (eg complete system), please either allow generously or give us a ring for quotation.

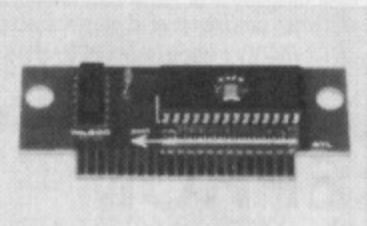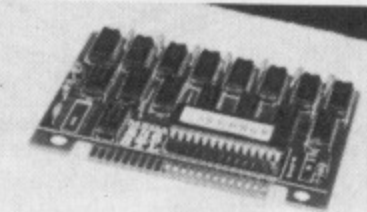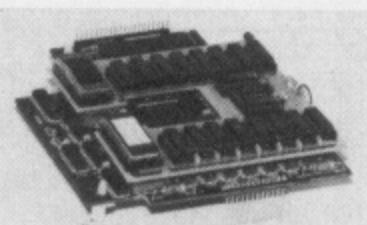

Please fill and send to:
Solidisk Technology Ltd
17 Swayne Avenue
Southend-on-Sea,
Essex SS2 6JQ

Name:

Address:

Items:

Price:

P&P: £2/£3/£6/£12

Total:

Access/Barclay  

Solidisk Technology Limited
17 Swayne Avenue
Southend-on-Sea, Essex SS2 6JQ
Tel: Southend (0702) 354674 (16 lines)

TELETEXT ADAPTER

Would you like access to free high quality software and over a thousand pages of information, but Prestel access charges and phone bills too expensive? Then read on!


The answer is Teletext. Yes the same system everyone has seen incorporated into television sets, but with a difference. When Teletext is read by a computer you can actually use the data. The MORLEY TELETEXT ADAPTER introduces you to the world of Teletext at a price that won't break the bank. Inside it you will find the latest in second generation Teletext chip technology, which unlike our rivals who are still using chips designed more than ten years ago, will be fully compatible with any future advances in the Teletext system. With the Morley adapter you will get a state of the art unit that automatically tunes itself into the required station (no more messing around with screwdrivers or twiddling little knobs in the back of the case), a user friendly menu driven program, easy to follow instructions and a 12 month warranty. Add to this the free downloadable telesoftware and we are sure that you will agree that we are offering you one of the best bargains on the market today.

FEATURES:

* Advanced design uses the latest technology, will handle ANY future enhancements to the Teletext

system e.g.: full field; 8 bit data transfer; 2k pages etc.

- * Simply plugs into the user port.
- * Low power consumption, less than 200ma. Optional power supply available.
- * User friendly menu driven software including extended OSCLI and OSWord commands for access from BASIC programs.
- * Supplied with 16k ATS (Advanced Teletext Software) and 16k support ROM software inc. printer dumps, page spoolers etc.
- * FREE Telesoftware, no access charges (updated weekly).
- * Save selected pages to disc/tape for later retrieval.
- * Full access to all Teletext services and channels e.g.: CEEFAX, ORACLE, 4-TEL.
- * Gives you a real-time clock at your disposal (*TIME).
- * Software upgrades to allow for any enhancements to the Teletext service, e.g.: extra channels, full field data on cable & satellite systems etc. (only the media charge).
- * Easy to follow comprehensive user guides.
- * No hardware limitations, it can for example receive virtually unlimited numbers of channels.
- * Utils disc available including printer drivers allows pages to be selected and dumped direct to a printer

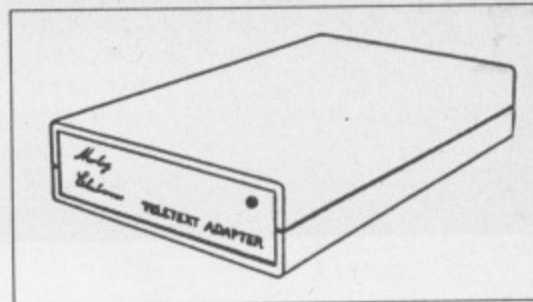

(no more TV or Radio Times to buy).


WHAT THE REVIEWERS SAID:

"...In terms of price, performance, future expansion possibilities and those little touches that show thought for the end user I would recommend the Morley unit."—(*Acorn User*, January, 1986).

"...The Morley unit has been designed to ensure that its operation is simple and smooth. It is the ideal Teletext adapter for school use."—(*A&B Computing*, June, 1986).

"...Using it over a number of months in different schools, it has proved utterly reliable, and may confidently be recommended."—(*The Times Educational Supplement*, September, 1986).

THIS IS THE BIGGEST SELLING TELETEXT ADAPTER CURRENTLY IN PRODUCTION WORLDWIDE, AND COMES WITH A FULL MONEY BACK SATISFACTION GUARANTEE.

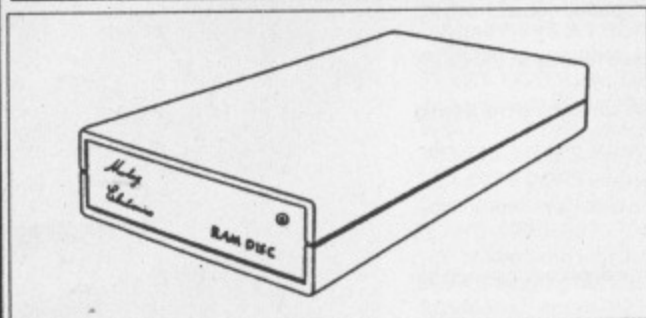

Now available! The first true MEGA capacity RAMdisc for the BBC, BBC B+ and MASTER computers. This fully compatible unit, currently available in either 1 or 2

megabyte versions comes complete with operating software on ROM, power supply, and a comprehensive user guide.

FEATURES:


One megabyte of RAM connected to the 1MHz bus. Used with the supplied ROM software programs and files may be saved and loaded from the RAMdisc in the same manner as from a floppy disc with a large increase of speed, for example, a 20k mode 0 screen takes about 3-4 seconds to load from disc and about 0.2-0.3 seconds to load from the RAMdisc. The RAMdisc ROM operates as a utility ROM

RAMDISC

working with the current filing system rather than as a separate filing system. Therefore ensures compatibility with any Acorn compatible DFS (not ADFS). The RAMdisc can be selected by a * command to take the place of any drive number from 0 to 9. If the RAMdisc replaces a floppy drive as 0 for example, all commands addressed to drive 0 will be intercepted by the RAMdisc. The default drive number is 4. Any 'Dangerous' *commands such as *COMPACT, *COPY, *BACKUP etc can be intercepted and the BBC's RAM from page 2 to &7FFF saved to RAMdisc workspace, and may be recovered using a *command. This prevents accidental corruption of any programs/data in RAM you may have been using at the time. The filing system wedge ROM supplied supports load/save, byte file access, all relevant OSFSC commands, and contains a formatter verifier and 'sector' editor for use with the RAMdisc. Catalogue structure allows up to 2,688 files.

Well that's the spec., add to this our usual 12 month no quibble guarantee and we're sure you'll agree the Morley RAMdisc is the sensible alternative if increased storage capacity and speed is your requirement.

EPROM PROGRAMMER V2

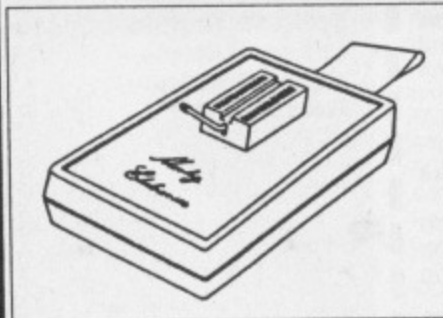

The MORLEY EPROM PROGRAMMER V2 is a small self contained unit that plugs into the BBC or MASTER user port. It comes with a high quality ZIF (zero insertion force socket) and contrasting plastic case. Also included in the package is it's own user friendly menu driven software on ROM or disc. This state of the art unit, allows programming of 2764 (8k), 27128 (16k), and 27256 (32k) EPROMS. Not only does the hardware allow

programming of the usual NMOS devices, but will handle the new generation CMOS equally as well, and with the average time taken to program a 16k at less than 30 seconds we believe it to be one of the fastest programmers available today.

THE HARDWARE

The Unit is completely under software control, there are no knobs or switches to baffle the novice, and the extended features provided should excite the pro's.

THE SOFTWARE

The comprehensive user friendly software included in the package has two main parts, the first allows EPROMS to be read, programmed, verified and edited, also allowing a ROM image to be loaded or saved to disc. The second is a full ROM management system in its own right, which has a host of useful features and routines, such as KILL and RESURRECT ROM to disable or enable a sideways ROM, dump ROM image to buffer or disc, move ROM image in buffer to sideways RAM, and VIEW-SEARCH any sideways ROM.

The whole system is available now for less than the price of one WORDWISE chip. So get yourself the all new MORLEY EPROM PROGRAMMER V2 today and start using those expansion boards for what they were made for! ROMS. Immediate delivery no quibble 12 month guarantee.

MASTER CARTRIDGE

Designed and manufactured by Care Electronics to Acorn specifications. These high quality Master expansion cartridges will take two 16k sideways ROM's, and will, unlike similar cartridges available from other manufacturers, accept the new second generation programs, such as Computer Concepts Interword and Spellmaster ROM's. These Cartridges come in a high quality, robust, formed-plastic case, that fits neatly into either one of the Master's cartridge slots.

MASTER SMART CARTRIDGE

This device was designed and manufactured jointly by Morley and Care Electronics.

The Smart cartridge will at the press of a button halt any program running in memory and execute any one of a host of useful built in, or user defined procedures, and once completed will return to the program and continue where it left off. The only limiting factor with this device is the programmers imagination. The Smart cartridge will prove useful to the novice, allowing him to do the simple things like dump any screen to printer, and make backups of protected tape or disc based software, but has an open ended specification for the advanced 'HACKER' allowing advanced programming techniques to be incorporated into almost any program at the touch of a button.

BUILT IN FEATURES (at the press of a button)

- Autosaves computer's entire memory.
- Freeze program at any point.
- Screen dump (any mode) to printer or disc.
- Allows any OSCLI command without disturbing memory.
- Copies 90% of protected software.
- Tape to disc, disc to tape.
- User friendly menu.
- Sound On/Off.

**12 MONTH NO QUIBBLE WARRANTY
ALL CARTRIDGES COME WITH A**

MORLEY MASTER BOARD 'AA'

MORLEY
ELECTRONICS

At long last the add-on all MASTER users have been waiting for, an internal ROM board.

No more need to turn the computer off to insert the cartridge containing the ROM you need to debug the program in memory.


The new MORLEY MASTER BOARD "AA" allows you to have up to 8x16k and 4x32k extra Roms installed inside your MASTER and still leaves the cartridge slots free. This in effect allows your MASTER to support as many as 24, 16k ROMs installed permanently, whilst retaining the standard 4 x sideways ram banks and four banks by using cartridges

A staggering 32 ROM images installed and accessible at any time

Included in the package is a utility ROM which has many useful features such as 'FICOPY', a clever file transfer program that transfers files between DFS and ADFS formats or vice versa.

So for less than the price of four external cartridges you get a MASTER BOARD "AA" which with twice the capacity has got to be THE ROM expansion for the serious MASTER user.

The unit comes with the usual Morley, full no-quibble twelve months warranty, and our usual after sales service

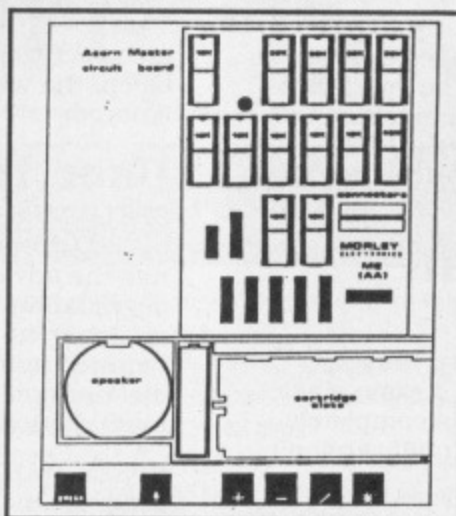

Unit 3, Maurice Road Industrial Estate,
Wallsend, Tyne & Wear NE28 6BY
Telephone: Tyneside (091) 2627507
Telex: 265871 A/B MONREF G
(Quoting Mag 70211)

THE COMPLETE RANGE OF TELETEXT SOFTWARE from M/B SOFTWARE

***NEW... DESIGN 7 PLUS** - now 'the best' is even better. Held in high regard by reviewers and hundreds of satisfied owners, DESIGN 7 has been further improved, with revised keypad & even more features. Design/load/save and MODE 7 screen with ease, up to full CEEFAX/Oracle standard. Will convert ANY MODE 7 screen to a BASIC procedure, for inclusion in your own programs. ROM version includes a file copier, printer dumps useable from BASIC etc. B/MASTER/COMPACT.

TELETEXT EMULATORS/SCREEN DISPLAYS/INFORMATION SYSTEMS - A complete range of teletext programs to cater for all needs, with full teletext adapter interfacing.

***NEW... DESFAX** - totally new version - streets ahead of the competition - run your own information/display system. Stores hundreds of screens on dual 80 track drives (96 screens on single-sided 40 track), with access to any screen with a SINGLE KEYPRESS. Lots of special effects - screens can scroll, slide, overwrite etc. Animation, loops, subroutines - send for details - not enough space here to even begin to describe the advanced features!! B/MASTER/COMPACT

***NEW... MASTERFAX** - 84 MODE 7 screens in memory at once. 148 screens possible with cartridge RAM. An advanced teletext/carousel program featuring SINGLE KEYPRESS or 3-digit page selection. Runs entirely from memory - no disc accesses after pages are loaded. Superb animation and other effects. MASTER/COMPACT only.

***NEW... VU-FAX** - 1000 screens and no disc accesses! Screens stored on MORLEY 1MByte RAM DISC. SINGLE KEYPRESS gives instant access to any screen (or emulate teletext). This is the ultimate MODE 7 screen management system - there is nothing else like it. MODEL B/MASTER 128.

***ALSO... MASTERcopy** - DFS/DFS, DFS/ADFS, ADFS/DFS, ADFS/ADFS file copier. Uses the MASTER 128's memory to the full to permit fast disc copying. 31 DFS files to ADFS disc in less than 2 minutes. Creates directories automatically. You will wonder how you ever managed without this program. Described by reviewers as 'unexcelled'. MASTER 128 and COMPACT's fitted with DFS ROMS.

ORDER FORM

To order simply complete and return by post enclosing your cheque/P.O. made payable to Morley Electronics, or by phone during office hours, quoting your ACCESS or VISA number.

Morley Electronics, Unit 3 Maurice Road Industrial Estate, Wallsend, Tyne & Wear NE28 6BY Telephone Tyneside (091) 2627507.
Telex: 265871 A/B MONREF G (Quoting Mag 70211)

ALL PRICES INCLUDE VAT @ 15%

| Qty. | Item | P&P Rate | Qty. | Item | P&P Rate |
|------------|------------------------------------|------------|------------|--|------------|
| Qty. _____ | Morley Teletext Adapters | 119.95 (a) | Qty. _____ | M/B Software Design 7+ | 9.95 (c) |
| Qty. _____ | Optional Power Supply | 9.95 (b) | Qty. _____ | M/B Software Desfax | 19.95 (c) |
| Qty. _____ | Teletext Utilities on disc | 5.95 (c) | Qty. _____ | M/B Software DesROM | 12.95 (c) |
| Qty. _____ | 1 Megabyte RAMdisc | 199.95 (a) | Qty. _____ | M/B Software Mastercopy Disc | 12.95 (c) |
| Qty. _____ | 2 Megabyte RAMisc | 349.95 (a) | Qty. _____ | M/B Software Mastercopy ROM | 14.95 (c) |
| Qty. _____ | Eprom programmer V2 | 34.50 (b) | Qty. _____ | M/B Software Masterfax | 29.95 (c) |
| Qty. _____ | Master ROM boards "AA" | 45.95 (b) | Qty. _____ | M/B Software VU-Fax System inc RAMdisc | 249.95 (a) |
| Qty. _____ | Master RAMdisc/SWR cartridge | P.O.A. | Qty. _____ | 5.25" Floppy discs x 10 | 7.95 (c) |
| Qty. _____ | Care Master ROM cartridges | 8.95 (b) | Qty. _____ | 27128 16k CMOS EPROM | 3.65 (d) |
| Qty. _____ | Master Smart cartridge | 39.95 (b) | Qty. _____ | Info Pack + Demo Disc of all Software | FREE (c) |

Please delete: Adapter software on ROM/Sideways RAM format/Software on 40/80 track disc

Name _____ Phone no. _____
Address _____ Post Code _____



Cheque No _____ Access/Visa No _____ Amount £ _____

Please add Postage and Packing @ a=£3.00 b=£2.00 c=£1.00 d=£0.65 (when ordering more than one item, add P&P. on highest rate item only)
GOVERNMENT, LOCAL AUTHORITY, AND TRADE ORDERS WELCOME. Please allow 28 days for delivery

SPELL - MASTER

This is the first completely ROM based spelling checker in the world. As a result it out-performs all known spelling checkers on this machine or any other micro-computer. The single 128K EPROM contains over 59,000 separate words and 22K of program.

Compatible with all BBC Micros

Special switching techniques ensure that the 128K ROM appears to the machine as one single 16K ROM - this guarantees that it is completely compatible with the ROM sockets in all versions of the BBC Micro-computer.

Compatible with all the major word processors

SPELL-MASTER has been designed to fully integrate with the most popular word processors on the BBC, WORDWISE and WORDWISE PLUS, VIEW and of course INTER-WORD. While editing in these word processors all that is necessary to control SPELL-MASTER is to press one CTRL key (Usually CTRL-J). This causes a menu to appear listing a variety of options such as 'Check entire text', 'Check word at cursor', 'Continuous check - on/off' etc. Text is checked directly in memory while in the word processor. There are even short-cuts to the menu, for example, pressing CTRL-V in any of the above word processors will start checking the text immediately from the current cursor position. Compare this with the process of checking text in the most highly rated competitive product - VIEWSPELL.

| VIEWSPELL | SPELL-MASTER |
|--|--|
| <ul style="list-style-type: none">• Save text from word processor.• Enter spelling checker.• Load text into spelling checker.• Check the text.• Go back to word processor.• Load marked text.• ...finally, make corrections. | <ul style="list-style-type: none">• Press CTRL-V• make corrections. |

Check entire text

In a word processor, SPELL-MASTER can check at up to 10,000 words per minute. Whenever a word is indicated as misspelt the user is given three simple choices. Replace the word with another selected from the dictionary, ignore the word altogether or add it to a user dictionary.

Check as you type

Because the dictionary is ROM based it is possible to check words as they are typed. This feature works with all the above named word processors and does not slow the operation of the word processor at all. Whenever an

incorrect word is entered the computer will beep; the word may then be corrected or simply ignored.

User Dictionaries

SPELL-MASTER supports extensions to the main dictionary in sideways RAM or ROM. This has the advantage that there is no speed degradation when checking against user dictionaries, since there are no disc accesses required at all. Once a word is added to a user dictionary it is treated as if it is present in the main dictionary.

SPELL-MASTER can support a number of separate dictionaries at once, each sideways RAM or ROM holding up to 3000 additional words. Once a dictionary has been created it can be 'burned' into an EPROM to form a permanent extension to the main dictionary.

Provision is made for editing any dictionary extension, for adding or deleting words in bulk, and directly loading or saving user dictionaries from or to sideways RAM.

Additional star commands

These can be issued from any language ROM such as spreadsheets or BASIC (they can even be included into BASIC programs). Some of the 8 commands are:

*CROSSWORD - Will search the entire dictionary for words that exactly fit the search pattern. For example *CROSS. ##M#U#ER would list ARMOURER, COMMUTER, COMPUTER. It takes about 8 seconds to check against all 59,000 words.

*ANAGRAM - Will list all the words in the dictionary that contain the same letters as those specified.

*FUZZY - Will list all words that sound something like the one you are searching for. If you are not sure of the spelling of a word then entering the approximate spelling here will generally list the word you are looking for.


Price: £59.00 incl.

Upgrades

Owners of the older two chip versions of SPELL-MASTER can upgrade to the single chip version for £25.00. However this new version is functionally equivalent and so it should not be necessary to upgrade.

2nd processors

Due to its unique design SPELL-MASTER will not work with word processors running on the 6502 2nd processor, although there are facilities provided for checking long text files.



Computer Concepts



Gaddesden Place, Hemel Hempstead, Herts HP2 6EX Telephone: (0442) 63933

Software • S • C • E • N • E •

Palace of Magic

| | | | | |
|---|---|---|---|---|
| S | G | P | V | O |
| 5 | 8 | 8 | 8 | 8 |

PALACE of Magic is the latest in a long line of arcade adventures from Superior Software. It's similar in many respects to one of Superior's earlier releases called Citadel – in fact I began to wonder why it wasn't called it Citadel Two.

The scenario is quite simple. You have offended an evil wizard called Caldeti who has turned you into a dwarf and banished you into the Palace of Magic. Your task is to search for a transporter, your only means of escape, which is hidden

somewhere in the 100 screens which make up the Palace and the lands surrounding it.

You can move left and right and can jump up to twice your height to get over some obstacles. Ropes and ladders are also available to help you in your plight.

Scattered about the Palace are lots of coloured bases, some of which have keys or other useful objects sitting on them. You can only pick up or drop objects while you are standing on these coloured bases and you can only carry two objects at any one time.

The keys are colour coded and are necessary to open the similarly coloured gates which bar your way around the Palace.


Your task is made a lot harder by the fact that you are not the only living creature – the place is crammed full of unusual and nasty monsters who are out to get you. If you bump into any of these, they drain you of energy. If you lose all your energy, you die.

Fortunately, you are able to restore yourself by finding and absorbing energy which for some strange reason is stored in magical top hats.

The maze is complicated and the puzzles are challenging but not impossible. Some of the solutions are so obvious once you've discovered them. The graphics are quite good and most of the objects look like what they're supposed to be, which is a big help when it comes to figuring out where the objects should be used. There isn't a lot of sound in the game, but the game doesn't require much.

The only real criticism I can make about this game is that it has no Save facility. I found with its predecessor, Citadel, that once I had figured out a large number of the puzzles it could take around two hours to play the game up to the point where I could try something new.

I have to admit to being an avid arcade adventure fan. I still haven't solved all the mysteries of the Citadel and I know there are a lot of people in the same boat. Now, with the

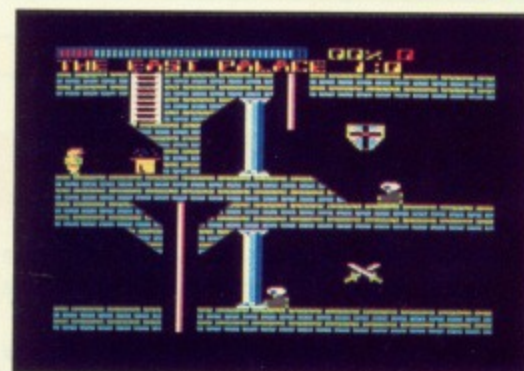


Palace of Magic to escape from as well, I foresee many more late nights of problem solving for a lot of adventurers.

Desmond

Price: £9.95 (cassette), £11.95 (5.25in disc), £14.95 (3.5in disc)

Supplier: Superior Software, Regent House, Skinner Lane, Leeds LS7 1AX, Tel: 0532 459453

Programmer's Profile

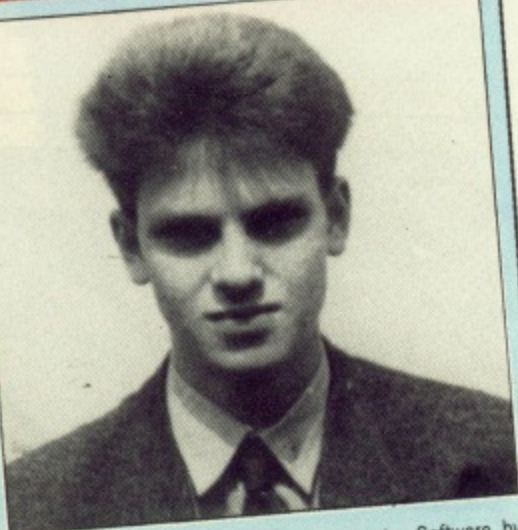

Palace of Magic was submitted to Superior Software by Martyn Howard, an 18 year old from Surrey. Interested in writing quality games and utilities, his ambition was to have a game on the market. With Palace of Magic he has achieved his goal.

Suds

| | | | | |
|---|---|---|----|---|
| S | G | P | V | O |
| 7 | 8 | 9 | 10 | 9 |

TELEVISION these days seems congested with soap operas. Whether it is a simple British offering in the mould of East Enders, a dire Australian attempt like Sons and Daughters or an elaborate American extravaganza such as Dynasty, whenever we switch on, we get the continuing story of such and such.

I suppose it was only a matter of time before these "everyday lives" found their way into computer adventures. Suds is unashamedly a direct spoof on the four major British soaps: Emmerdale Farm, Coronation Street, Cross-Roads and East Enders – only the names have been changed to protect the innocent!

The adventure loads in four parts, though you don't need to complete a part in order to progress to the next – however,

Price: £4.00
Supplier: Riverdale Software, 95 Printon Avenue, Manchester M9 3JW, Tel: 061-795 4549

each section is undoubtedly more difficult than its predecessor.

You are required to negotiate the puzzles of Emeroyd Farm then catch a train to the mean streets of Manchester and the perils of Abdication Street.

If you successfully overcome the traps of the TV studio, the Cross-Eyes motel looms where the mad arsonist awaits you. Finally – if you haven't finally lost your sanity – who knows what the fabled land of the Dead Enders has in store for you.

I have now completed the Emeroyd Farm section and have made major inroads into the three other parts of this megagame, and life is becoming complex beyond imagination – after all isn't that what Soap Operas are all about?

The puzzles in part one, although logical in retrospect, are ingenious and riddled with superb puns. For instance, upon climbing a tree I discovered a herring which I duly smoked over a War Women's camp fire. Hey presto – I had a red herring. However, this was a red herring with a particular use which I will leave you to discover.

Later in the adventure I had to pour a bucket of cement over some relatives who were blocking my path to the next section – the result was to CEMENT RELATIONS.

The Black-Pudding bomb in Abdication Street is something else, and I don't think Equity would be too pleased to discover its purpose: You'll need some tripe to muffle the blast.

A skeleton will provide a key to succeeding at the Motel, where the problems have had me scratching my head for nights on end. Meanwhile, the Dead Enders have quite a few surprises awaiting even the most experienced of adventurers.

This is a truly addictive adventure which requires as much thinking and planning as key tapping. The humour is refreshing and something in the mould of What's Eeyore's? or Locks of Luck.

American Suds is now in production with an Australian version to follow. In the meantime, I suggest you go out and buy Suds immediately.

Pendragon

S: Sound
G: Graphics
P: Playability
V: Value for money
O: Overall

Ransack

| S | G | P | V | O |
|---|---|---|---|---|
| 8 | 9 | 8 | 8 | 8 |

IT seems just yesterday that I was enthralled with Peter Scott's Omega Orb. Like an old friend, Mr Scott is back again with something resembling a space hopper on a pogo stick.

However, AI is not your average toy, but an artificial life-form – terms like robot and android having long since been banned on the grounds of mechanical discrimination.

Initially, he's just armed with a front firing laser but has the ability to collect a myriad of different weapons including four types of smart bomb and six types of laser.

The scenario is a good old shoot-'em-up, with plenty to

shoot at. On my pre-release copy there were 44 different aliens with 200 attack patterns, all spread over eight massive planetscapes. Each planet. (named after a popular arcade game) is no less than 104 screens wide, giving a total of 832 action packed screens.

At the end of each level you are awarded a bonus screen. It is possible to bounce on the alien space ship while shooting at the baddies, but I have not managed it yet.

The scrolling landscape moves at devilish speed and you'll have to practice before you see the end of each level.

What makes Ransack so challenging is a feature that is very easy to miss when you first play the game, especially when like me, you don't read the accompanying instructions.

The landscape of this game is not just scenery – It's a hazard. As you bounce along, quite merrily blasting away at every mild mannered alien in sight, you might fail to notice

the sudden appearance of electrified spikes, which have quite a shocking effect on AI's energy level.

These spikes can be neutralized by a certain type of smart bomb – you will have to discover which one for yourself. The problem with smart bombs, and other armament for that matter, is that they fly through the air, along with everything else and are likely to be destroyed by a stray laser bolt – so beware.

The sound employed by Ransack is just what you'd expect from this type of game, with lots of atmospheric pops, bangs and whizzes. While the title tune sounds very familiar, it's unusual and witty.

In conclusion, this is one for every collection. Now, where did I put my multi-function, ultra-cluster, auto-sighting, hyper-laser-ranging pogo stick...

Guider

Price: £7.95 (cassette) £11.95 (disc)

Supplier: Audiogenic, 12 Chiltern Enterprise Centre, Station Road, Theale, Berkshire R97 4AA.

Tel: 0734 303663

Brian Jacks Superstar Challenge

| S | G | P | V | O |
|---|---|---|---|---|
| 7 | 3 | 6 | 7 | 6 |

BRIAN Jacks Superstar is a re-release of an old favourite which first appeared a couple of years ago. The only change is the price which has now dropped to a budget £1.99.

The aim of the game is to beat Brian Jacks (Mr Superstar himself) in eight different events of the kind that were featured on the old TV programme. Event number one is swimming and here you must coordinate left and right arms (Z and X keys) with breathing. Once mastered, it is no problem to beat Brian who swims in the other lane.

The next event also has a watery theme – canoeing. To succeed in this requires several hits of X to move the paddle one way followed by several hits of Z. Once again, Brian is in the other lane and is relatively easy to beat.

Next comes archery. Here you must hit a moving target, allowing for wind drift. A plan view shows you and the target

and you can adjust elevation and shot. A front view of the target shows where the arrow hits. You have six arrows in all and I have not yet beaten Brian who does not visually compete – he just gets a score.

We now move to the track for the cycling which requires Z and X bashing and gear changes. Once again, Brian is not that fast and is easily beaten. The same is true for the 100 metres run. In both these events Brian is shown competing in the other lane.

Events six and seven are gym tests. First, the squat thrusts which are a Brian Jack's speciality. To complete a successful thrust, several hits of X and then Z are required. You'll be hard pressed to beat the master at this one. The arm dips require similar Z and X work to get up, followed by Return to drop. Brian is not so hot at these and he's easily beatable.

The final event is football skills. You must dribble a ball through a slalom course, reach the penalty area, then position a cursor in the goal to indicate where you wish to shoot. A diving goalie will attempt to save it. You have three



attempts at this. Again, Brian does not appear in this event but gets a score anyway.

Like a number of these sports simulations, there are good, ordinary and poor events. In this case, the football is very poor – the animation is painfully slow. You have to complete the test to move on to round two (the same events again) but I rarely have the patience to do it.

It really spoils the entire software in which the gym test events are particularly good.

Rog Frost

The Puppet Man

| S | G | P | V | O |
|---|---|---|----|---|
| 9 | 8 | 9 | 10 | 9 |

THIS is Geoff Larsen's fifth adventure and goes far to confirm his mastery of the genre.

The Puppet Man is one of the most original and engrossing adventures I have seen for a long while, and must be Geoff's finest offering yet.

At the end of the last century there lived a puppeteer whose plays were the talk of the land. In fact his puppets were so life-like that it was even rumoured that they were little people, disguised as puppets.

The Puppet Man is due to perform at the village of Owlsmore's midsummer fair – but the day before, his star

marionette is stolen or mislaid.

During a dream you are visited by Mnemosyne, the mother of the Greek Muses. She tells you that if you can help three of her daughters, the muses of dance, comedy and poetry, they in turn will assist you in a search for the marionette.

The adventure becomes a trilogy of inter-related plots in which you first help a ballerina, then an auguste clown and finally Pierrot.

The backdrops incorporate 19th century theatre and circus themes giving the whole adventure the heady atmosphere of vaudeville. The puzzles are complex but totally logical and require careful thinking and backtracking.

The beginning reminds me of Level 9's Worm in Paradise and Robico's Myorem. To be compared even in part to those two masterpieces must be sure testimony to the quality of

this adventure.

Later in the bash is a beautiful scenario involving a butcher, a baker and a candlestick maker – and a wooden tub. Another scene involves trapping a bear, while on the stage is a struggling Covent Garden escapologist!

As suggested, the adventure involves dancing, comedy, poetry and sleight of hand, and like all Larsoft adventures is totally non-violent.

The multi-use of each location and the facility to TALK to the characters you meet, means that Geoff has used the Quill to good effect.

This adventure really is superb and you will be hard pressed to find a better release for the price. Larsoft is a name worth watching. All I can say is – buy it: You won't be disappointed.

Pendragon


Price: £3.95 (mail order only)

Supplier: Larsoft, 4 Chantry Road, Clifton, Bristol BS8 2QD.

Star Clash

| | | | | |
|---|---|---|----|---|
| S | G | P | V | O |
| 7 | 8 | 8 | 10 | 8 |

WRONGLY accused of a crime he did not commit, the Emperor is forced to flee the galaxy. You have been assigned the post of imperial bodyguard: Your duty is to protect the Emperor's star cruiser from the unwelcome (and usually vio-

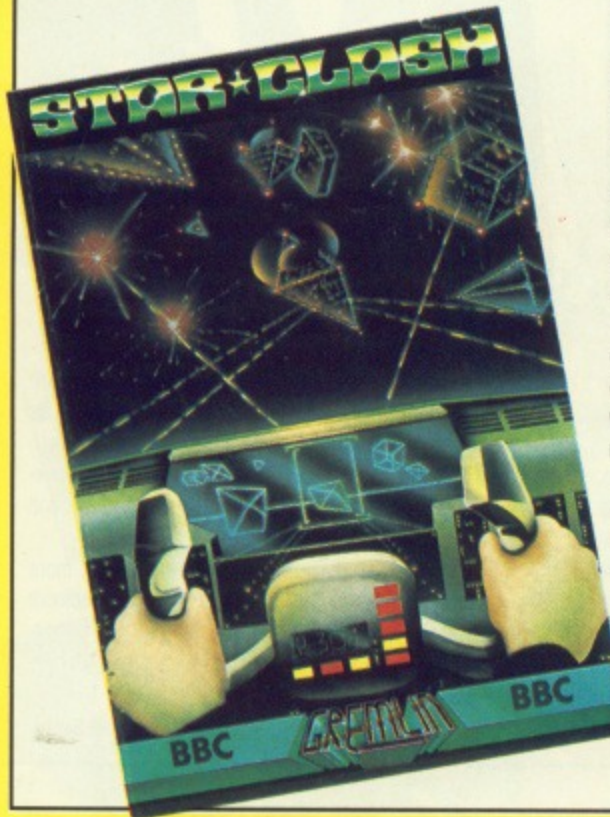

lent), attentions of galactic customs officials.

Star Clash is a game which is very much in the Elite mould, a fast moving, vector graphic shoot-'em-up. Forget the trading, the drug smuggling, the bounty hunting – just get out there and blast.

The Elite style is maintained through the inclusion of an identical three dimensional radar display. This enables you to pinpoint the position of both the customs ships (white dots), and the star cruiser (a purple dot).


This purple dot is very important as it is all too easy to get wrapped up in your own dogfights, and forget the Emperor. The first indication that all is not well is a flashing screen and the sound of gunfire. This is the time to rush to your master's side before he, and the game, is terminated.

Decelerating from warp speed as you approach the star cruiser you will see pulses of laser energy being fired by the customs ship. The cruiser manages to avoid some but those which strike home do so with a shower of sparks and flying metal.

Your ship fires two laser bolts which converge as they shrink into the distance. The inaccuracies become apparent when you fire a shot and then move the joystick: Instead of following its initial trajectory the laser pulse moves with the gunsights – hardly a major failing but irritating.

Progress is measured by how many star gates you pass through. A star gate is a hyperspace portal through which you jump to another galaxy. Unfortunately, each gate is heavily defended by a squadron of trigger-happy customs officials.

A parade of attackers is displayed in a demo routine at the

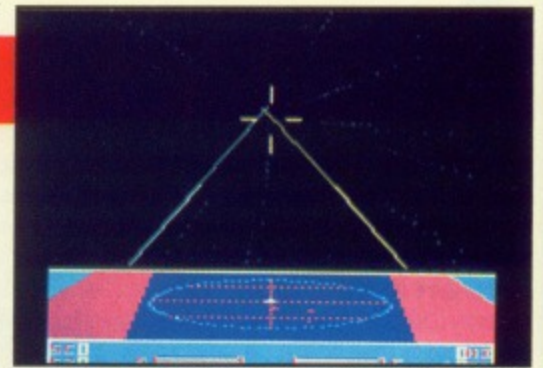

start of the program. These are rotated through various axes and their points value shown on the screen – though some won't be encountered until the higher levels. The one ship that is not displayed is the star cruiser. The easiest way to identify this is to blast every ship you meet during the first game – the star cruiser was the last one you shot before the game ended.

The instructions provided are sparse, giving no explanation of the instrument display. This wasn't too disastrous as the white on cyan instrument panel was practically invisible on my humble colour monitor.

Star Clash is a very enjoyable, budget-priced trip around the universe with a hefty helping of zapping thrown in for good measure.

Neil Astley

Price: £4.99 (cassette)
Supplier: Gremlin Graphics, Alpha House, 10 Carver Street,
Sheffield S1 4FS.
Tel: 0742 753423

Megarok

| | | | | |
|---|---|---|---|---|
| S | G | P | V | O |
| 6 | 6 | 6 | 6 | 6 |

LENNY Morgan is a spaceship pilot with a soft spot for aliens. His kind hearted disposition earned him a court martial and two years hard labour on a penal colony. Rock breaking 23rd century style involves sitting in the middle of an asteroid field with a mining laser and a lot of concentration. Megarok is a budget version of the early Acornsoft hit Meteors, the term budget applying to both cost and quality.

One of the most appealing features of the original game was the graceful and effortless way the asteroids and spacecraft floated around the screen. Megarok's characters move far too quickly and erratically. Spaceship rotation is an ideal example: The ship rotates jerkily through eight compass points, unlike the smooth pixel by pixel arc described by the Meteors craft.

The duration of the game is not governed by a set number of lives – you have one ship and a fixed amount of energy. Every collision with an asteroid drains your energy reserves, the amount lost being proportional to the size of the asteroid struck. You may lose up to 20 of your original 100 units in a single collision, so it is vital that you realise the importance of your shields. Use of the shields expends one energy unit

and provides five seconds protection, a worthwhile trade at the start of any screen.

Firepower is supplied in the shape of twin laser cannons, but despite this seemingly awesome potential you will still have difficulty destroying the rocks. Many shots which appear to strike home have no effect, especially when firing across the path of an asteroid. This dodgy collision detection does work in your favour from time to time you, close your eyes and wait for the crash of an imminent collision, only to find that the rock passes straight through the ship!

The secret of success in the original game was to stay as still as possible and blast the boulders as they drifted towards you. Dabbing the thrust key resulted in gentle and controlled acceleration of the ship. Dab the thrust key in this game and the beast engages turbo boost, darting around the screen hitting all and sundry.

After a short while it begins to decelerate, but the damage has already been done. The retro key will stop the ship dead, but the chances of locating it while in a state of blind panic are small.

Megarok's two player option is pretty original: Controlling one ship each you play simultaneously – shackled together. All controls work as before, but the direction in which you travel is a result of your individual directions and speeds. Should one of you bite the dust, there is a short pause before the game resumes for the surviving player.



From screen four onwards some of the rocks will fire crystals at you – catch the white ones and dodge the rest. Despite the £1.99 asking price I can't recommend Megarok: Put your money towards one of the Acornsoft/Superior compilation tapes and play the original Meteors.

James Riddell

Price: £1.99
Supplier: Bug-Byte, Victory House, Leicester Place, London
WC2H 7NB.
Tel: 01-439 0666

The Living Daylights

| S | G | P | V | O |
|---|---|---|---|---|
| 5 | 6 | 5 | 5 | 6 |

HOT on the heels of the new James Bond film *The Living Daylights* is the computer game of the same name. It was with some trepidation that I loaded up the game – I still have nightmares about *View to a Kill*.

The game follows the exploits of James Bond as he fights his way through eight separate scenes from the film. These are stored as three files on the flip side of the cassette.

Each scene consists of a series of adjoining screens – these are traversed by running from left to right. You have control of Bond's gun sight – when it is on the screen Bond can shoot, move it off the righthand edge and Bond will run.

Episode number one takes place in Gibraltar. You are involved in a mock battle with members of the S.A.S. – they pop up from behind bushes at regular intervals, but have very little to do with the game.

Keep running until you meet up with the KGB agent... then kill him. I had major problems at this point – the Ruski just wouldn't die. In desperation I decided to read the instructions, and found I'd been running around with a gun which fired paint pellets. A quick visit to the armory soon rectified the situation and the Ruski bit the dust.

With the completion of each scene you are given the opportunity to choose a special weapon from Q's workshop.




Only one of the four on offer will be of use in the next scene.

Scene two involves running down a street while avoiding bombs dropped from a helicopter. The bombs are easy to dodge but the resultant craters are a hazard and must be jumped. The best way to do this is to hold down the jump key continuously – Bond skips merrily down the street, leaping all obstacles.

Running and jumping is the order of the day again in scene three. Race through the factory amid a shower of falling pipework, while at the same time hurdling numerous barriers. It's during sections like this that you notice how little control you have over Mr Bond. Trying to stop short of a falling pipe is nearly impossible – even when you've released the movement key he still takes two more steps.

Once file number two has loaded you are ready to play scene four, *The Mansion*. This is one of the trickier levels, a

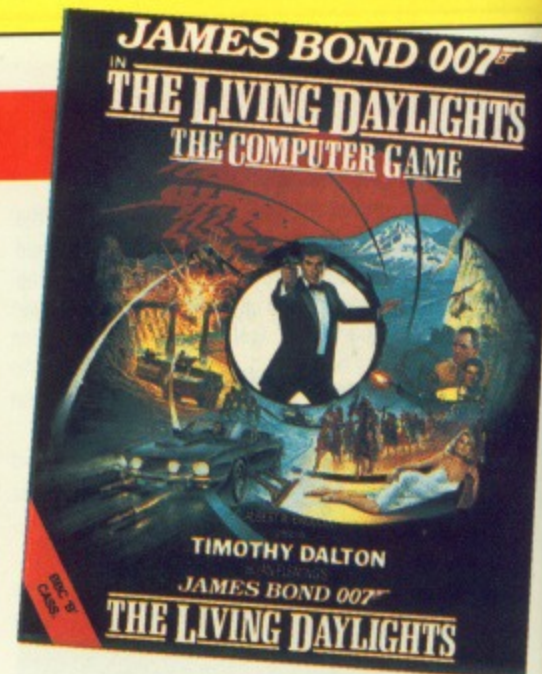

mixture of running, ducking and shooting is required if you're to survive intact. The enemy agents are disguised as milkmen and armed with exploding pintas.

The fairground is the setting for scene five. Innocent looking toy balloons cause Bond a major headache – quick and accurate shooting is essential.

I never completed the remaining three screens, more through lack of enthusiasm than lack of skill. The mediocre graphics and animation are matched only by the boring, repetitive, gameplay – it looks like the nightmares will continue.

Carol Barrow

Price: £9.95 (cassette) £12.95 (disc)

Supplier: Domark, 204 Worpole Road, London SW20 8PN.

Tel: 01-947 5622

Rik The Roadie

| S | G | P | V | O |
|---|---|---|----|---|
| 6 | 8 | 8 | 10 | 8 |

AS Rik, the roadie for the top pop group Alternative Rock, you have quite a problem on your hands. Their next concert is due to start in just six hours and you have all the gear in the van 160 miles away. First you've got to make the motorway dash, then move all the amps into the hall and finally set the correct sound levels on all four channels.

The first stage, the drive, is effectively a motor racing game. A plan view of the road is shown with large, brightly coloured cars. The usual alternate coloured road edging is used to generate a good impression of speed. The sound effects are quite pleasing but can be turned on or off at any time.

You need to travel fast because of the six hour limit, but the entire roadway is cluttered up with drivers who are presumably out for a Sunday afternoon potter. It needs careful use of accelerator and brakes to be able to weave a course between them. At times, the route ahead seems completely blocked. You must then slow right down to allow the dithery drivers to sort themselves out.

After about 100 miles, driving fatigue (or is it screen watcher's tiredness?) sets in. This can result in many more accidents each of which puts half an hour on the clock. It is worth travelling more slowly to avoid crashes. Alternatively, you can do what every good driver should do – take a rest.




The game has a pause facility which will not cost you any time faults.

When your journey is finally completed, the scene changes and a moonlit, star-spangled sky provides the backdrop to your attempt to shift the equipment. In fact only three items need to be moved, and to achieve success you must hit two keys to control Rik's left and right feet. Pure speed on the keys is no good for this – care and coordination are required.

To set the sound levels you must ensure that four meters are kept in the red area. Too low a level will mean the audience won't hear the concert, but too high is worse as fuses will blow.

If you complete the three tasks within the six hour limit (about six minutes real time) You are rewarded with a display by that fab group Alternative Rock.

Alternative Software has released a number of games for Acorn computers in recent months. *Rik The Roadie* is the

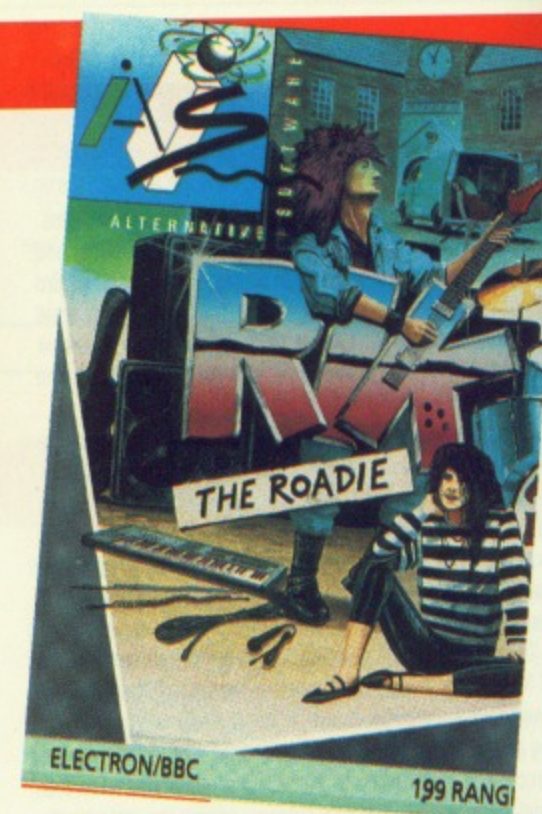

best I have seen. The graphics are neat and interesting, and the various sections of the game, which all require different playing skills, are well linked by an unusual theme. I look forward to more programs of this quality from the alternative people.



Rog Frost

Price: £1.99


Supplier: Alternative Software, Units 3-6, Bailey Gate Industrial Estate, Pontefract, West Yorkshire.

Tel: 0977 79777

Exclusive Poster Bonanza

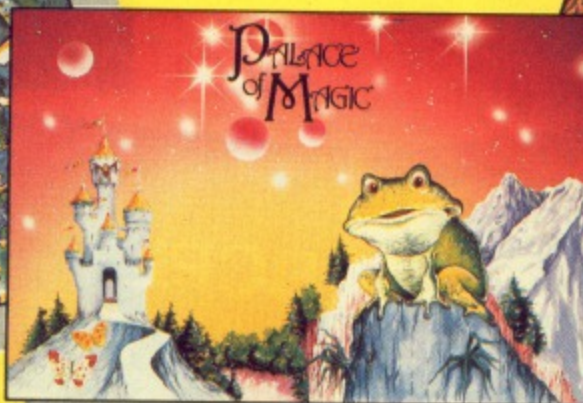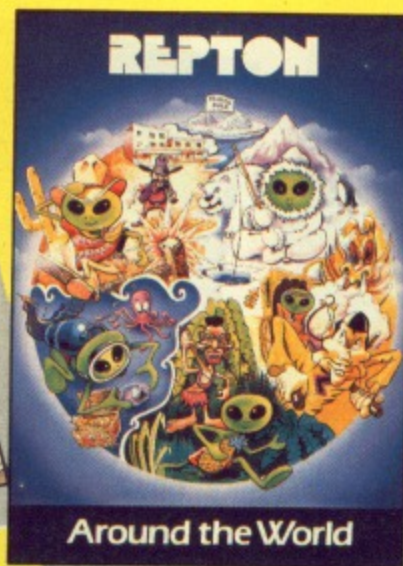

- ▲ Bumper 24" x 17" top quality posters.
- The latest chart topping titles under licence from Superior Software Ltd.
- ▲ All produced from the original artworks.
- Exclusive mail order offer.

- Only £1.95 each.
- **SPECIAL OFFER** Any 3 posters for only 
- ◆ **FREE** delivery in G.P.O. approved postal tubes, (UK only).
- ▲ Guaranteed delivery within 7 days.

Only available direct from

IMPACT
Posters

Unit 3 1 Percy Street Sheffield S3 8AU.

To: Impact Posters, Unit 3 1 Percy Street
Sheffield S3 8AU.

(BLOCK CAPITALS PLEASE)


Please send me:—

| Poster | Quantity |
|------------------|----------|
| Craze Rider | |
| Around The World | |
| Zarch | |
| Codename: Droid | |
| Palace of Magic | |
| Ravenskull | |
| I enclose £ | |

Name

Address

Please make cheques/postal orders payable to Impact Posters



Amazing Acornsoft bargains

GAMES

THREE tapes for the price of ONE!

Revs and Aviator are two of the best simulations ever produced for the BBC Micro. And with Revs Four Tracks you will be able to experience the excitement of driving around some of Britain's most renowned racing circuits.

Games Galore
Normally £39.85
Offer Price £9.95

Save £30!




LANGUAGES

Powerful roms pack a punch

- BCPL is the most flexible of modern structured languages and is the easiest to learn. It is particularly good at handling Input and Output, and is perfect for writing utilities, screen editors, control systems – even games software. The package includes a language rom, a disc containing compiler, screen editor, 6502 Assembler, utilities – and a 450 page User Guide.

BCPL Bundle
Normally £109.70
Offer Price £29.95


Save £80!

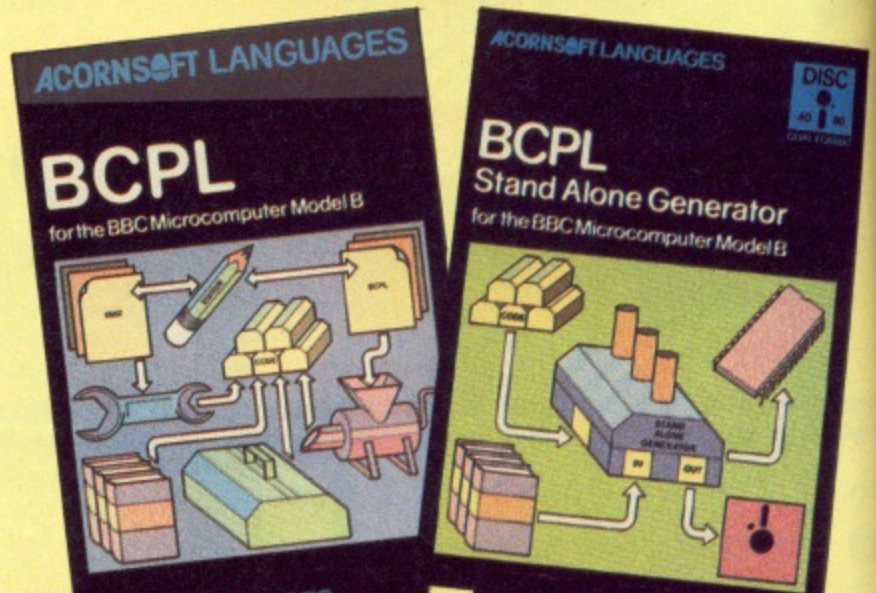

- Forth is a complete implementation of the 1979 standard specification. It is a compiled language which typically runs five times faster than Basic, and this rom version gives full error messages, making it ideal for beginners and enthusiasts alike.

Normally £49.85
Offer Price £19.95

Save £30!

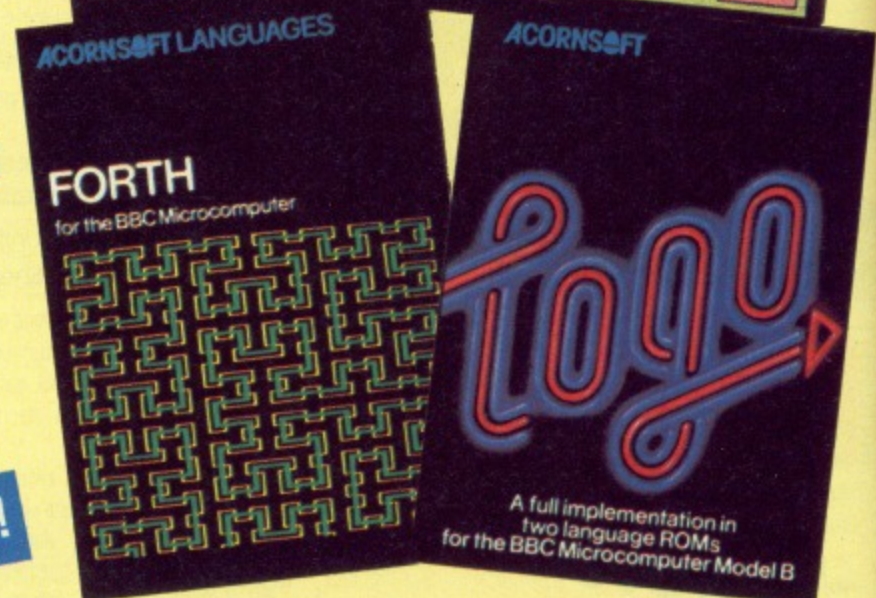

- Acornsoft Logo is a full implementation of the Logo language widely used in schools. Special features include multiple screen turtles, extensive sound and graphics commands, and list processing facilities. The package includes two roms, three manuals, a reference card, one disc and a cassette.

Normally £69.00
Special offer £29.95

Save £39!

MUSIC

Make your micro sound sensational!


Creative Sound is a beautifully presented 320 page book, packed with everything you need to know about music on the BBC Micro.

The authors are musician, composer and programmer David Ellis, and Chris Jordan, who designed the BBC Micro's sound system as well as the Acorn Music 500 and 5000.

There are more than 30 program listings, including programmable synthesisers, sequencer, music compiler, example tunes, Mozart's Musical Dice Game, composition aids, pitch trainer, scales program – and sound effects galore.

Creative Sound
Normally £9.95
Offer Price £4.95

Save £5!

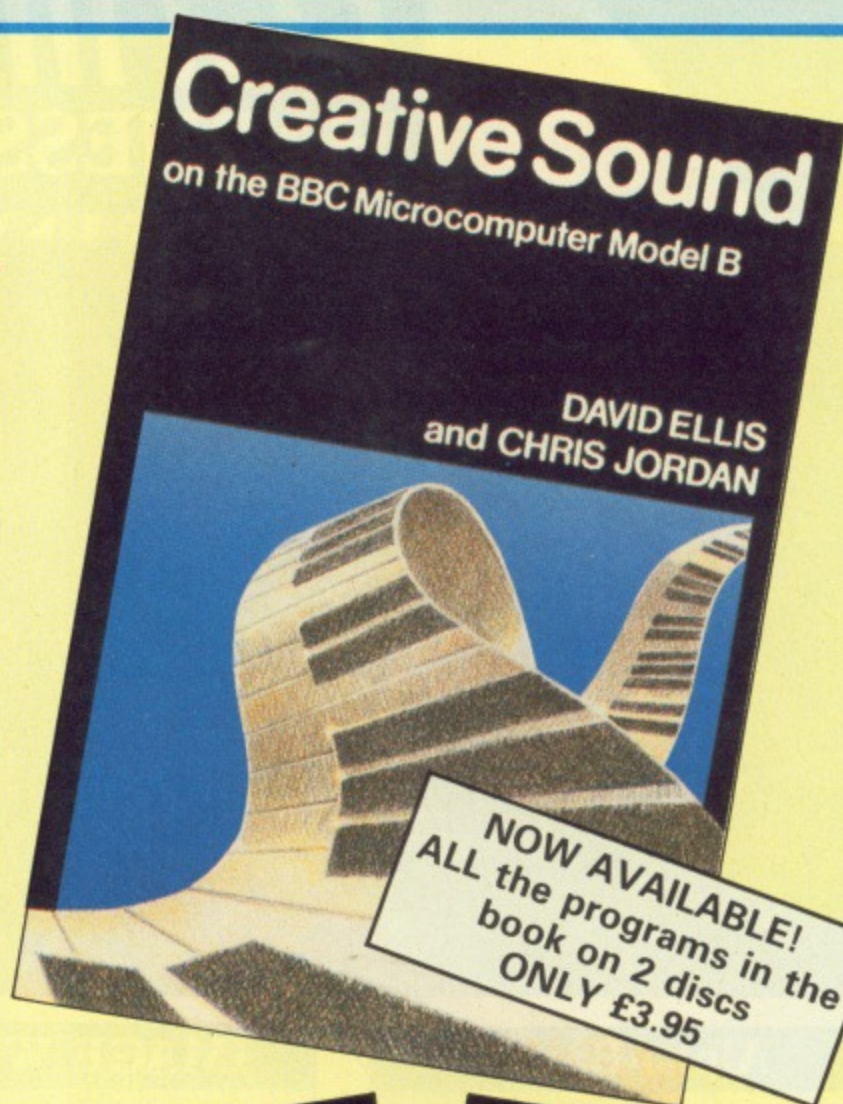

EDUCATION


For the younger micro user . . .

- ABC is a unique writing tool for seven year olds and upwards, designed to be easily operated and quickly understood.
- Spooky Manor is an adventure game for up to four players that encourages planning and logical thinking.
- In Talkback you can hold conversations with the computer by typing in sentences – and even create your own computer characters.
- Drill, cut, squash and paint your creations using the machines in the Workshop. Suitable for children from the age of three upwards.

Previously each package cost £9.95 – now you can buy all four tapes together for the same price.

Educational extravaganza
Normally £39.80
Offer price £9.95


Save £30!

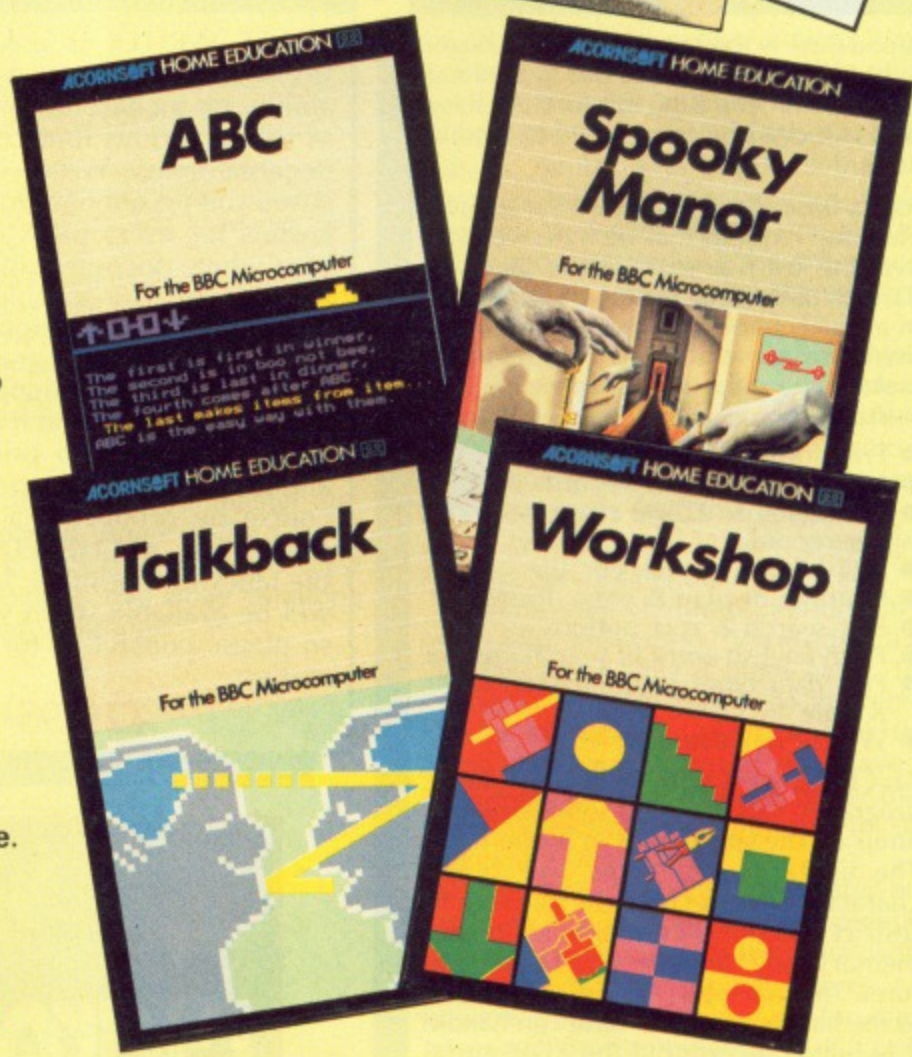

TO ORDER TURN TO THE FORM ON PAGE 149

rchimedes

HARNESS THE POWER

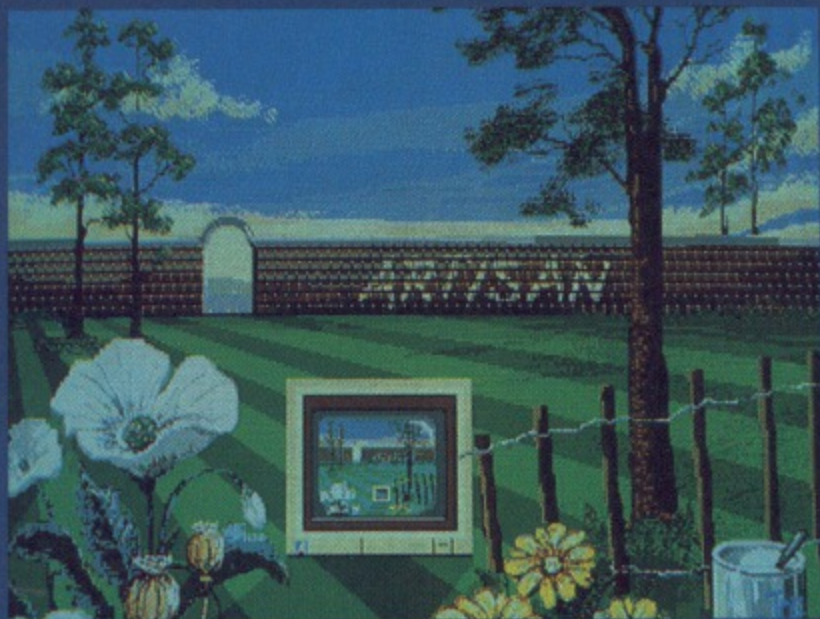

A computer like ARCHIMEDES needs software that can match its outstanding capabilities. Our new products do just that and one of the first areas that you will want to explore is the graphics capability. ARTISAN, from the authors of ARTROOM, is the ultimate in graphics packages. Just take a look at the screen shot reproduced here, as they say 'a picture is worth a thousand words'. We can't describe all the features here but some major functions are:

- Full screen
- Fast multi level scrolling zoom
- Image distortion
- WIMP environment
- Magic brush
- ECF designer

Plus all the usual features and some very unusual ones too.

£39.95

—COMPETITION—

PICTURE THIS

Can you do better than the picture shown here? If so you could win yourself a unique prize. If yours is judged to be the best picture then your masterpiece will be transferred to canvas by our artist Jon Warmisham (BA Hons Fine Art). The competition is open ended but the best picture each month will be featured in ACORN USER and a monthly prize will be awarded. Full details are contained in the ARTISAN pack.

Alpha-Base

Alpha-Base is the successor to the hugely successful Beta-Base, the top selling database for the BBC micro. Beta-Base files can even be transferred to Alpha-Base.

Alpha-Base incorporates all the suggestions and requests that we have received over the last five years. All of the standard Beta-Base facilities are there but in a much improved form. In addition there are many new features that will make your life easier. Some of the features are:

- Free format screens
- Multiple pages per record
- 400 fields & 27,600 characters per record
- 2.14 billion records per file
- Multiple display & entry forms
- Fast search & sort options
- Plain English entry of search criteria
- Five data types including formula & date
- Winchester compatible

At Clares we try to give you usable programs. This results in some arbitrary limits on the size of files in Alpha-Base. The limits of 400 fields and 27,600 characters per record are unlikely to restrict you but they enable us to save memory and provide additional features. The only other limitations are due to the hardware. Alpha-Base can handle 2.14 billion records but the ADFS can't!

£49.95

IMAGE WRITER

IMAGE WRITER is a sophisticated WIMP based wordprocessor with the ability to include graphics as well as to use various font combinations. Because Image Writer is document based you do not have to create page layouts for every page. You prepare your whole document in one go. Just type it, add the graphics and print it—simple. The graphics can be created with the built in graphics editor. Image Writer is designed as a first level DTP product and it uses the normal printer fonts to print both text and graphics in one pass. We will of course be producing a full feature DTP when ARCHIMEDES supports the fancy font printing. Image Writer will be available when you read this so please contact us for more information.

£29.95

ARCHIMEDES TOOLKIT MODULE

ATM is the first toolkit available for this powerful new micro. Many of the features that made RAMROD a top seller have been incorporated into ATM and a whole host of new features have been added including:


- 10 Memory and disc editors
- 8 Memory and disc searches (inc. wildcards)
- A scrolling disassembler
- A one line assembler (accessed from the disassembler)
- Shift and compare functions
- Catall and Exall for discs
- Winchester compatible

If you want to explore your ARC then order the ARCHIMEDES TOOLKIT MODULE today. It has enabled us to disassemble modules, discover many undocumented SWI calls and has been an invaluable aid in debugging software. You can even search for mnemonics.

£39.95



ALL PRICES INCLUDE VAT and P+P
OVERSEAS ORDERS ADD £4



DON'T FORGET, YOU CAN ORDER WITH ACCESS CARD TOO

98 Middlewich Rd Northwich
Cheshire CW9 7DA Tel: 0606 48511

Here's looking at View

Rory McClory reviews

two books devoted to

View and associated

products

HOW many BBC Micro users have been tempted to try word processing but their View roms remain unpagged? Yet it is possible to learn the fundamentals of View within an hour or two and become proficient after relatively few sessions.

The Acornsoft View Reference Guide won't help you to learn how to word process, and until now we have had to make do with Acornsoft's Into View, which is okay as far as it goes.

Fortunately, two books have been published recently either of which will improve your understanding of View and the related family of View products.



Apart from View, the books cover somewhat different ground. The contents have been summarised in Table 1 to help you decide which is more appropriate for your requirements. The main difference is that Clive Williamson's book has major sections dealing with ViewSheet and ViewStore and therefore will appeal to users wanting to use and integrate these members of the View family.

Perhaps his title Mastering... is misleading nowadays. Indeed, one of my colleagues decided not to buy it because he thought, mistakenly, that it

Product: *Mastering View, ViewSheet and ViewStore* by Clive Williamson
Price: £12.95
Supplier: Sigma Press, 98a Water Lane, Wilmslow, Cheshire SK9 5BB.

Product: *A Dabhand Guide - View, including ViewSpell and ViewIndex* by Bruce Smith
Price: £12.95 Programs Disc, 5.25in DFS £7.95, 3.5in ADFS £9.95
Supplier: Dabs Press, 76 Gardner Road, Prestwich, Manchester M25 7HU.
Tel: 061-773 2413

dealt only with View on the Master and he had a model B. Bruce Smith's guide concentrates almost entirely on View and only includes the close relations ViewSpell and ViewIndex.

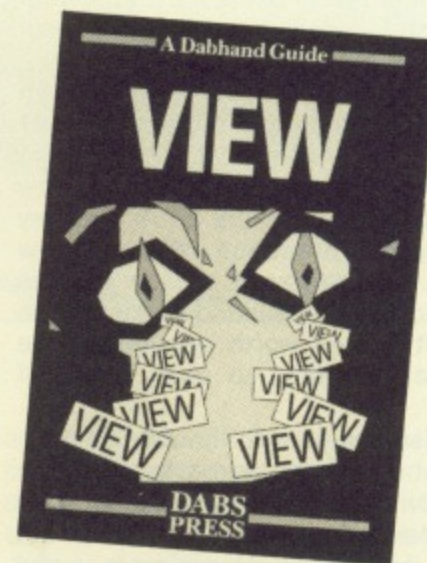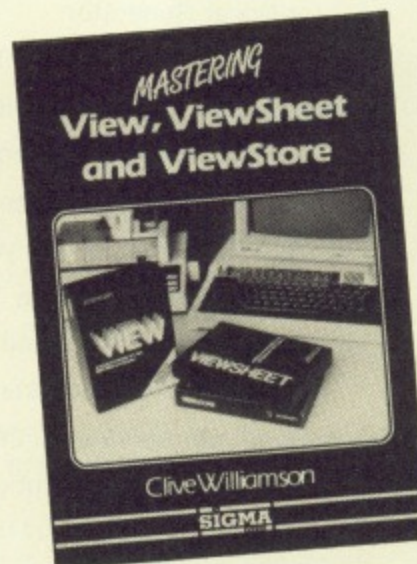

Both books concentrate on the current version, View 3, but give detailed descriptions of the earlier versions, View 1.4 and 2.1. In this respect, the problems of describing commands which differ in the three versions are best dealt with by Smith, who confines the differences between the versions to an appendix. However, Williamson clutters up his text by describing the differences as they occur and this could be very confusing for the novice.

Computer beginners reading Mastering View have a 28 page preamble on shadow memory and different disc filing systems, but those interested on getting to grips with View should turn to page 30. From there Williamson goes on to cover all aspects of View in a straightforward, but unimaginative, fashion.

His coverage of View printer drivers is brief and ViewSpell, ViewIndex and ViewPlot get hardly a page each. The instructions for ViewSheet do not represent a significant advance over the Acornsoft manual but if you have a Master or Compact they are better than the abbreviated instructions in the Welcome Guide.

I find ViewStore fairly complicated and the manual is little better. I was pleased to find that Williamson gave some useful examples but he probably does not provide enough information for more advanced ViewStore users.

I think it is much easier to appreciate the *What You See Is What You Get* nature of View on a monitor - and this is

Turn to Page 40 ►

| Contents | Number of pages | |
|------------------------------------|-----------------|-------|
| | Williamson | Smith |
| View | 70 | 113 |
| ViewSpell | 1 | 12 |
| ViewIndex | 1 | 6 |
| ViewSheet | 30 | 0 |
| ViewStore | 51 | 0 |
| ViewPlot | 0.5 | 0 |
| Integrating View family (OverView) | 23 | 2 |
| Introduction to computing | 13 | 2 |
| Printers/printer drivers | 17 | 12 |
| Appendices | 0 | 35 |
| Index | 3 | 12 |

Table 1: A comparison of contents of the two guides for View

REVIEW

◀ From Page 39

Bruce Smith's approach. Smith brings a depth of understanding to View which should appeal to both novice and regular user.

His descriptions of the Number Registers are clear and he provides some very useful !BOOT files and original function key definitions. For users still in the dark over printer codes, Smith's section on printers will shed some light.

The only utilities that Williamson offers are a program to set printer type-styles (not a printer driver) and a machine code patch that allows View 2.1 to capitalise on the extra memory freed by the presence of a shadow memory. A whole range of View utilities are listed in the Dabhand Guide (Table II) and it is well worth purchasing the accompanying disc to save hours of typing.

The disc comes with its own 13 page guide which deals primarily with the Printer Driver so it is essential to have the Guide book to make full use of the utilities, some of which are more useful than others. My favourite is the Screen

Layout Driver, which allows you to see a picture of the layout of each page of text.

The screen for the View Manager is attractive, but I do not find this type of menu system saves much time. The view recovery utility can recover your text after you have mistakenly typed a NEW

(or *WORD in View 3) but beginners will have to contend with *DUMP, memory bytes and *SAVE.

If you want a good manual for View buy the Dabhand Guide and disc, but if you want a guide which covers ViewSheet and ViewStore as well have a look at Clive Williamson's book.

Printer Driver Generator

Ready made printer drivers (Epson FX80 and Citizen 120D)

Screen Layout Driver – provides a 'printed' layout on screen

Recover – allows you to recover text after NEW

File Checker – compares the contents of a file with memory

Highlight Checker – shows you all text between highlights of same type

View Help – *HELP for View

View Manager – a 'front end' to View

Excit: an extended catalogue system

Template: an easy selection of dummy template files (standard pages)

Precis: a brief description of files on disc (up to 255 characters)

Load Text

Table II: Utilities from the Dabhand Guide

21st Software

PRESENTS A SELECTION OF HARDWARE, UTILITIES & SOFTWARE FOR THE BBC MICRO

M: Denotes Master Compatibility
MAIL ORDER ONLY

NEW

SUPERIOR'S PLAY IT AGAIN SAM

4 Games: Thrust, Ravenskull, Citadel & Strykers Run
Cass. £8.45, Disc £10.65, Compact £12.95

ACCESS HOTLINE

Ask for Jacqui

0625 528885

24Hr Answer Service

| MINI OFFICE II | | |
|----------------|-------|-----------|
| Cassette | RRP | Our Price |
| 5.25" | 14.95 | 12.95 |
| 18.95 | 14.95 | |
| 3" | 19.95 | 17.95 |

| Cassettes Only | | SPECIAL OFFERS | | Overdrive | |
|---------------------|-------|----------------|-------|-------------|-------|
| Steve Davis Snooker | £8.95 | Nightshade | £8.95 | Chuckie Egg | £3.95 |
| Yie Ar Kung Fu | £5.95 | Dr. Soft 747 | £4.95 | Discs Only | £3.95 |
| Countdown | £5.95 | Erbert | £2.99 | Repton 2 | £7.95 |
| Elite | £8.95 | Pinball | £2.99 | Big KO | £7.95 |
| Alan | £8.95 | Death Star | £5.95 | Goal | £7.95 |

| VINE MICRO'S ROMS | | |
|-------------------|----------------|------------------|
| REPLAY | RRP £25.00 | Our Price £20.50 |
| MASTER REPLAY | Self Contained | RRP £15.95 |
| Our Price | £13.95 | |

| NEW | NEWSONS | NEW | MIRRORSOFTS |
|--------------|--------------|-------------|-------------|
| Evening Star | Evening Star | Spitfire 46 | Spitfire 46 |
| Cass £8.45 | Cass £8.45 | Cass £8.45 | Cass £8.45 |
| Disc £11.65 | Disc £11.65 | Disc £11.65 | Disc £11.65 |

| ACORNSOFT | Case | Disk | Compact |
|----------------------|------|-------|---------|
| Viewspell | Rom | 35.55 | |
| ACORN/LINKWORD | | | |
| Italian | | 12.95 | |
| Spanish | | 12.95 | |
| ALLGATA | | | |
| Decathlon | | 8.95 | |
| Who Dares Wins II | | 8.95 | |
| Quiz Quest | | 8.95 | |
| Son of Blagga | | 8.95 | |
| ATARISOFT | | | |
| Robotron | | 8.95 | |
| BEAU JOLLY | | | |
| Five Star Games | | 8.45 | |
| Five Star Games II | | 8.45 | |
| BUBBLE BUS | | | |
| Starquake | | 8.45 | 10.65 |
| BUGBYTE | | | |
| Twin Kingdom Valley | | 2.95 | |
| Tennis | | 2.95 | |
| Jack Alac | | 2.95 | |
| Savage Pond | | 2.95 | |
| Crickit | | 2.95 | |
| Starforce 7 | | 2.95 | |
| Dunjon 2 40T 8271DFS | | 2.95 | 8.95 |
| Skyhawk | | 2.95 | |
| Plan B | | 2.99 | |
| Hunky Dory | | 2.99 | |
| Squawkalizer | | 2.99 | |
| Megarock | | 2.99 | |
| Bug Byte Comp. | | 68.95 | |
| C.D.S. | | | |
| Colossus Chess IV M | | 8.25 | 12.95 |
| Steve Davis | | 7.95 | 11.95 |
| Brian Clough M | | 12.95 | 15.95 |
| CLARES | | | |
| Fortress Plus | | 15.95 | |
| Replica III | | 13.50 | |
| Enhanced Beta Base | | 22.00 | |
| Beta Base Utilities | | 10.85 | |
| Marcom Rom | | 36.00 | |
| COMSOFT | | | |
| Playbox | | 3.95 | |
| DR. SOFT | | | |
| 747 Flight Sim | | 8.95 | 8.95 |

| Phantom Combat | Case | Disk | Compact |
|-----------------------------------|-----------------|-------|---------|
| Double Phantom | | 17.95 | |
| DATABASE | | | |
| Red Arrows | | 8.95 | 10.95 |
| Instant Mini Office | (Roms on board) | 54.95 | |
| DESIGN PEOPLE | | | |
| Tanks | | 11.65 | |
| Srin/Bismark | | 9.65 | |
| Battle of Britain | | 8.45 | 11.45 |
| DOMARK | | | |
| Trivial Pursuits | | 12.45 | 15.95 |
| Young Triv | | 13.45 | 16.95 |
| The Living Daylights | | 8.45 | 11.65 |
| DURELL MARTECH | | | |
| Sam Fox's strip Poker | | 11.65 | |
| Acom DFS only | | 11.65 | |
| War | | 7.65 | 12.95 |
| Tarzan | | 8.45 | 11.45 |
| Combat Lynx | | 7.95 | |
| ELECTRIC SOFTWARE | | | |
| Firstreck | | 8.49 | 13.65 |
| ELITE | | | |
| Paperboy | | 8.45 | 13.65 |
| FIREBIRD | | | |
| Sentinel | | 8.45 | 12.85 |
| Chob | | 15.95 | |
| HEWSON | | | |
| Headbrow A.T.C. | | 8.95 | |
| ASLACON SOFTWARE (Discs 40T only) | | | |
| Physicaria | | 8.75 | |
| Contraction | | 8.95 | |
| Bug Eyes II | | 8.95 | |
| Int. Megaspots/Gambit | | 7.45 | |
| Last of the Free | | 8.75 | |
| Thunderstruck M | | 8.75 | 10.65 |
| Thunderstruck II M | | 8.75 | 10.65 |
| Graham Gooch Cricket M | | 8.45 | 10.65 |
| Omega Orb M | | 8.75 | 10.65 |
| Sphere of Destiny M | | 8.75 | 10.65 |

| INCENTIVE | Case | Disk | Compact |
|----------------------------|------|-------|---------|
| Moon Cresta | | 8.95 | 8.95 |
| Graphic Adv. Creator | | 20.45 | 25.00 |
| Kat Trilogy | | | 10.65 |
| IMAGINE | | | |
| Knobias Coin Hits | | 8.45 | |
| Mika | | 8.95 | |
| Yie Ar Kung Fu | | 8.95 | |
| Yie Ar Kung Fu II | | 7.65 | |
| KOSMOS SOFTWARE | | | |
| French Mistress A or B | | 7.95 | 8.95 |
| German Master A or B | | 7.95 | 8.95 |
| Spanish Tutor A or B | | 7.95 | 8.95 |
| Answer Back Jun. or Sen. | | 8.95 | 9.95 |
| Answer Back Sport | | 8.95 | 9.95 |
| Identify Europe | | 8.95 | 9.95 |
| LCL | | | |
| Micro Maths | | 21.50 | 21.50 |
| (24 prog. 'O' Level) M | | 21.50 | 21.50 |
| Micro English | | 21.50 | 21.50 |
| (24 prog. 'O' Level) M | | 21.50 | 21.50 |
| Mega Maths ('A' Level) M | | 21.50 | 21.50 |
| Micro French ('O' Level) M | | 21.50 | 21.50 |
| LARSOFT | | | |
| Rising of Salandra M | | 4.65 | |
| Wychood M | | 3.95 | |
| Nine Dancers M | | 3.95 | |
| Puppet Man M | | 3.95 | |
| LEISURE GENIUS | | | |
| Scrabble | | 11.65 | 13.65 |
| Monopoly | | 11.65 | 13.65 |
| LOGOTRON | | | |
| XOR M | | 8.45 | 11.65 |
| XOR Designer M | | 13.65 | |
| MELBOURNE HOUSE | | | |
| Dodgy Gaezen | | 7.95 | |
| MICROPOWER | | | |
| Microgen | | 8.45 | 10.45 |
| Dr. Who/Terror Mines | | 17.25 | 18.65 |
| Castle Quest | | 11.65 | |

| MIRRORSOFT | Case | Disk | Compact |
|---------------------------------|------|-------|---------|
| Count with Oliver | | 6.95 | |
| First Steps | | 7.95 | |
| Quick Thinking Plus | | 5.95 | |
| Hammer Strike Force | | 8.95 | |
| MC LOTHLORIEN | | | |
| Johnny Reb | | 5.95 | |
| Special Operations | | 5.95 | |
| Battzone | | 5.95 | |
| OCEAN | | | |
| Daley Thompson Superstest | | 7.65 | 11.65 |
| Arkanoid | | 8.45 | |
| ROBICO SOFTWARE | | | |
| Benjax | | 8.95 | 10.95 |
| Enrhar 7 | | 16.45 | |
| Island of Xaan | | 8.95 | 10.95 |
| Rick Hanson | | 8.95 | 10.95 |
| Project Thekua | | 8.65 | 10.65 |
| Myorem | | 8.65 | 10.65 |
| The Hunt | | 7.95 | 11.65 |
| SQUIRRELSOFT | | | |
| Supergolf | | 7.00 | |
| T.V. Director | | 11.65 | 13.65 |
| ACORNSOFT AND SUPERIOR SOFTWARE | | | |
| Death Star | | 8.95 | 10.95 |
| Repton 2 | | 8.95 | 10.95 |
| Raddel | | 8.95 | 10.95 |
| Speech | | 8.95 | 10.95 |
| Karate Combat M | | 7.95 | 10.95 |
| Thrust | | 8.95 | 10.65 |
| Strykers Run M | | 8.75 | 10.65 |
| Galax Force | | 8.75 | 10.65 |
| Repton 3 M | | 8.45 | 10.65 |
| Ravenskull M | | 8.45 | 10.65 |
| Elite M | | 11.65 | 13.65 |
| Revs + 4 Tracks M | | 11.65 | 13.65 |
| Acornsoft Hits I or II M | | 8.45 | 10.65 |
| Superior Collection Vol I M | | 8.45 | 10.65 |
| Superior Collection Vol II M | | 8.45 | 10.65 |

| Grand Prix Cons. Set M | Case | Disk | Compact |
|---------------------------------|------------------------------------|--------|---------|
| Future Shock M | | 6.50 | 10.65 |
| Jet Set Willy II | | 6.50 | 10.65 |
| The Big K.O. | | 6.50 | 10.65 |
| Commonwealth Games | | 5.50 | 10.65 |
| US Drag Racing | | 5.95 | |
| Vindaloo | | 6.50 | |
| Ian Botham's Test | | 6.95 | 10.65 |
| Winter Olympics | | 6.95 | 10.65 |
| Jet Set Willy | | 7.95 | 10.65 |
| U.S. GOLD | | | |
| Spy Vs Spy M | | 8.45 | 11.65 |
| Phantom M | | 6.75 | 10.95 |
| Outbridge | | 6.75 | |
| Goal | | 6.50 | 10.65 |
| Future Shock M | | 6.50 | 10.65 |
| Jet Set Willy II | | 6.50 | 10.65 |
| The Big K.O. | | 6.50 | 10.65 |
| Commonwealth Games | | 5.50 | 10.65 |
| US Drag Racing | | 5.95 | |
| Vindaloo | | 6.50 | |
| Ian Botham's Test | | 6.95 | 10.65 |
| Winter Olympics | | 6.95 | 10.65 |
| Jet Set Willy | | 7.95 | 10.65 |
| U.S. GOLD | | | |
| Spyhunter | | 8.45 | 9.45 |
| Beach Head | | 8.95 | |
| Rebel Planet | | 6.95 | |
| Impossible Mission | | 7.65 | 13.65 |
| Crystal Castles | | 8.45 | 13.45 |
| Raid Over Moscow | | 8.45 | |
| ULTIMATE | | | |
| Jetpac | | 6.95 | |
| UTILITIES & ROMS Etc. | | | |
| NEW | PMS's GENIE (B, B+, M) ONLY £75.95 | NEW | |
| ADVANCED COMP. PRODUCTS | | | |
| A. Control Panel BM | | £32.20 | |
| A. Disc Toolkit BM/Compact | | £32.20 | |
| A. Battery Backed Ram M | | £37.99 | |
| A. Disc Investigator BM/Compact | | £32.20 | |
| ARCHIMEDES SOFTWARE | | | |
| CLARES | | | |
| Toolkit | | £37.95 | |
| Arisan | | £37.95 | |
| SUPERIOR SOFTWARE | | | |
| Zarch | | £17.45 | |

21st Software Limited, 15 Bridgefield Avenue, Wilmslow, Cheshire, SK9 2JS. Tel: (0625 528885)
ALL PRICES ARE INCLUSIVE OF VAT AND CARRIAGE
OVERSEAS ORDERS PLEASE ADD £1.00 PER ITEM. EDUCATIONAL & GOVT ORDERS WELCOME
We guarantee all titles are originals. We offer a quick and reliable service.

Please send me: Cas Disc 40T 80T
Compact Disc

1. _____ £ _____
2. _____ £ _____
3. _____ £ _____
4. _____ £ _____

TOTAL £ _____

Please ensure all Access orders quote the cardholders name
Please make cheques payable to:
21st Software Ltd
Access

Send Orders to:
21st SOFTWARE LTD. Dept MU
15 Bridgefield Avenue,
Wilmslow SK9 2JS
Tel: Wilmslow (0625) 528885

Name _____
Address _____
Post Code _____
Tel. No _____

Rory McCloy


investigates a new

board for your Master

REVIEW



Extra roms at a price...

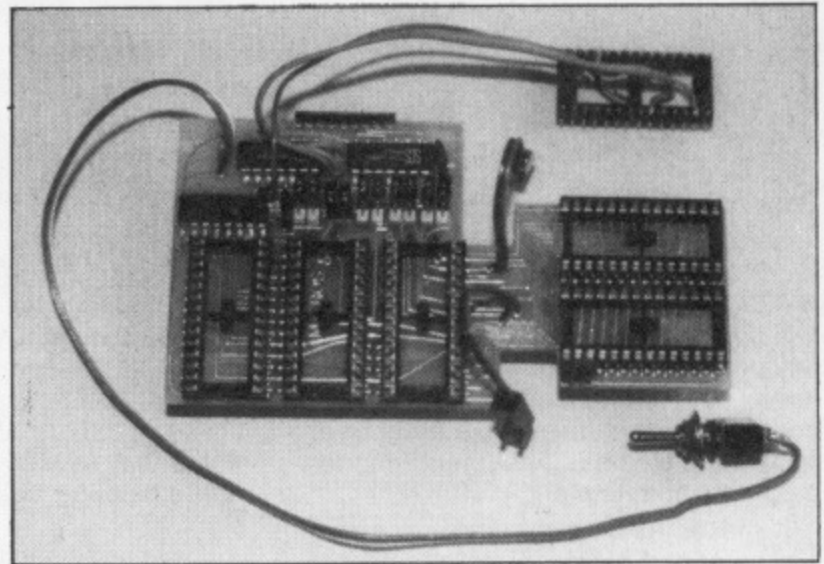

ONE reason I moved up-market to a Master was to rationalise the add-on boards that were sprouting out of my ageing BBC Micro. Of course, it was only a matter of time before enterprising companies would tempt me with hardware additions to the Master.

The latest offering from Vine Micros is the Romboard 4, which fits inside the Master and can carry four roms. However it is a rom extension board with a few differences. The two pairs of rom sockets available on the board can be configured to overlay the cartridge sockets or the ram areas. There is also a read/write protect switch for the Master's ram memory.

The small board is well made and has fly leads to two connectors and a 28-pin header which pushes over the right-hand end of 40-pin IC20. Following the single page of fitting instructions, I fitted the board within minutes – installation should present no problems to anyone used to plugging in roms.

Note that the notches on the roms

face north in the vertical sockets and west in the horizontal sockets. Rom socket 8 (IC27) lies underneath the board and so cannot be changed without removing the board. By the same token, large piggyback roms such as Interword cannot be used in socket 8, although they will fit on the Romboard. Socket 7 (IC37) is used to plug in the board and is copied on the board itself.

It is compatible with all the co-processors, internal modems and Econet. There is no on-board buffering but I found no problems in using 8k or 16k eproms.

Before switching on, you have to decide whether the roms on the board are to overlay the cartridge sockets or the ram memory. The board is fitted with ten links, each of which can be set in either of two positions (North or South) with the familiar shorting connectors.

The links are all set very close together and I found it fiddly and hard on the nails trying to alter the links. I wish Vine Micros had fitted a row of dip-

switches instead of the links, especially since you may want to alter the configuration of the rom and ram even when you are not fitting new roms. The overlay options are shown in Table I and require at least two or three links to be altered for each option.

If you are prepared to lose the use of one or more cartridges, or some ram, you may gain up to four internal rom sockets. If you rarely change roms and don't want removable cartridges accessible to tampering by the user – such as in a school or college – then Romboard 4 may be a good buy. However, the price of the board is more than the cost of two cartridges.

I find the 64k ram a useful feature of the Master but if you want these pages of memory overlaid by roms then the Romboard could offer you two extra sockets. By setting link connectors 19 and 18 to the East position in a normal Master you can use 16k or 32k roms in sockets 5 and 7 (IC37 and IC41). Inserting a single rom (nowadays the majority are 16k in size) into one of these sockets you lose the use of 32k ram.

The Vine Romboard allows you two sockets in exchange for a 32k ram bank, and providing you are using 8k or 16k roms you can use all the sockets the Master allows. There are intermediate options selectable by the link connectors which may suit some users and these are shown in Table I.

I'm hanging on to my ram and sticking to cartridges for the time being, and it's unreasonable to buy this board just for the ram read/write protect switch.

| Number of cartridge rom sockets | Number of Romboard 4 rom sockets | Number of main board rom sockets* | Size of ram available |
|---------------------------------|----------------------------------|-----------------------------------|-----------------------|
| 4 | 4 | 0 | nil |
| 0 | 4 | 0 | 64k |
| 0 | 4 | 2 | nil |
| 2 | 4 | 0 | 32k |
| 0 | 2 | 0 | 32k |
| 2 | 2 | 0 | 64k |
| 2 | 2 | 1 | 32k |
| 2 | 2 | 2 | nil |
| 4 | 2 | 0 | 32k |
| 4 | 0 | 0 | 64k |
| 4 | 0 | 1 | 32k |
| 4 | 0 | 2 | nil |

* The main board rom sockets refer to socket numbers 5 and 7. Socket 8 is always available and unaffected by these options.

Table I: Romboard 4 rom/ram overlay options

Product: Romboard 4
Price: £29.95
Supplier: Vine Micros, Marshborough,
Near Sandwich, Kent CT13 0PG.
Tel: 0304 812276



Red herrings, compatibility and hobbits

THE bulk of this month's offering is written by you, the reader. I really enjoy having your letters, comments, tips and queries because the average adventurer who writes to me is intelligent, courteous, witty and helpful.

It makes running this column a real pleasure; but if you want a personal reply from me do please enclose a stamped addressed envelope – Also exercise a little patience!

To provide space I have had to hold over the conclusion to my Emerald Isle solution until next time.

Andrew Hunt from Tasmania reckons this is one of the best adventure columns he has seen (flattery will get you anywhere): At the same time he raises a couple of matters to do with Twin Kingdom Valley.

The uniform in the Desert King's castle: Is it a red herring? All I can say is that when I wore it, I found it made little difference to the way I was attacked in the castle. Certainly the Forest King's daughter would probably not like it; so I decided it was a red herring. Anyone know better?

Similarly, Andrew wonders if there is a way of removing the diamond ring from the dwarf short of murder: I think not, so

prove me wrong if you can.

The Elf (G.I. Powell) is desperate for a copy of Acheton, as are several other correspondents. Does anyone know where they may have ended up? The Elf runs a helpline, so perhaps you can help him.

I have had a second, most interesting, letter from Richard Entwistle about the Mines of Moria and the problems experienced by Pedro Leonardo.

Richard confesses he is working from memory: He has upgraded to a Master and thus can no longer play The Lord of the Rings.

As an aside, I get rather irritated by these compatibility problems: Whose fault is it really? Is it that of programmers who won't stick to legal calls or else use over-elaborate protection; or is it Acorn who won't stick to standards initially laid down.

Anyway, Richard's thesis is this: At the start of part 2a you need to become two hobbits, such as Merry and Frodo.

When you get to *West of a lake* (two or three locations west of Moria's gate) tell Merry to go E; become Merry and examine the door. Save here.

Next become Frodo, light the candle and go E: Say Friend to the door and enter Moria.

Having saved this end position load it into part 2b of the adventure and then look to see whether any of the party (bar Gimli) are missing. If they are, return to part 2a and try again from the saved position made just outside the door.

Richard says that when you start part 2b there is another bug: Gimli disappears and is replaced by assorted objects (mithril armour and things like that) which cannot be manipulated.

Further into the adventure go E, E, E, U, E from the stone corridor and Gandalf will not let you leave.

Keep the door open until the orcs enter then go E and close the small door. After this go E again and you are back on track.

Another hint Richard gives is to wait after each move until you are beyond the second maze; otherwise you will leave the other characters behind.

Actions that help to deter the Moria bug include keeping Frodo well away from the strip of dry ground beside the door as much as possible and avoiding the slimy tentacles which attack when Frodo is present beside the door.

Pedro's experience of being *nowhere* is what happens when you become a character who is not present in the sec-

Problem Corner

In Micropower's **Wizard's Challenge**, Nick Musselwhite can't stop bleeding to death: What action should he take?

What's the password to get into the nightclub in **Melbourne House's Dodgy Geezers**?

Mark Turner has some queries. **Blue Dragon**: How do you pass the wizard at the bottom of the beanstalk after collecting the urn? **Firien Wood**: How do you survive the blizzard at the bottom of the chasm? **Franklin's Tomb**: Star trouble – where or what are the paper and wooden stars, which star is the Morning Star weapon?

Countdown to Doom: How do you escape the metal dome with the rod once the computer has started the countdown? (None of the solutions

sent to me mentions either a rod or a dome – I don't have the game myself). How do you stop the floating platform in the engine room? I'm sure the marks on the town wall after the sandworm ride are just scenery.

Tony Marter wants to put an end to his problems in that superb game **Gateway to Karos**. He scores 1518/1700, but can't find a use for the magnifying glass, the inscribed metal plate, the empty bottle and the purple fruit.

Tony's no beginner, so I'm sure he's tried drinking from the bottle after filling it in various locations and maybe the fruit should be fed to something.

Unfortunately I've not played Karos since Adam was a lad and my map


doesn't tell me what Tony should do.

He's missing one treasure, but has the ivory statue, silver horn, opal studded bowl, golden harp, blue gem, crystal ball, silver dish, silver star, magic carpet, mirror, casket of jewels, golden cup and the carry-all bag.

So what and where are the questions that Tony needs answering. He's bursting to go on to **The Price of Magik**.

Nick Fox is stuck in **Kayleth** – he'll find the early moves in our July issue.

Mark Outten wonders how to use the kitten in **The Temple of Vran (Ket Trilogy part two)** and is stuck once more in Old Father Time. He feels sure he needs the coins to free the dwarf – is he right?

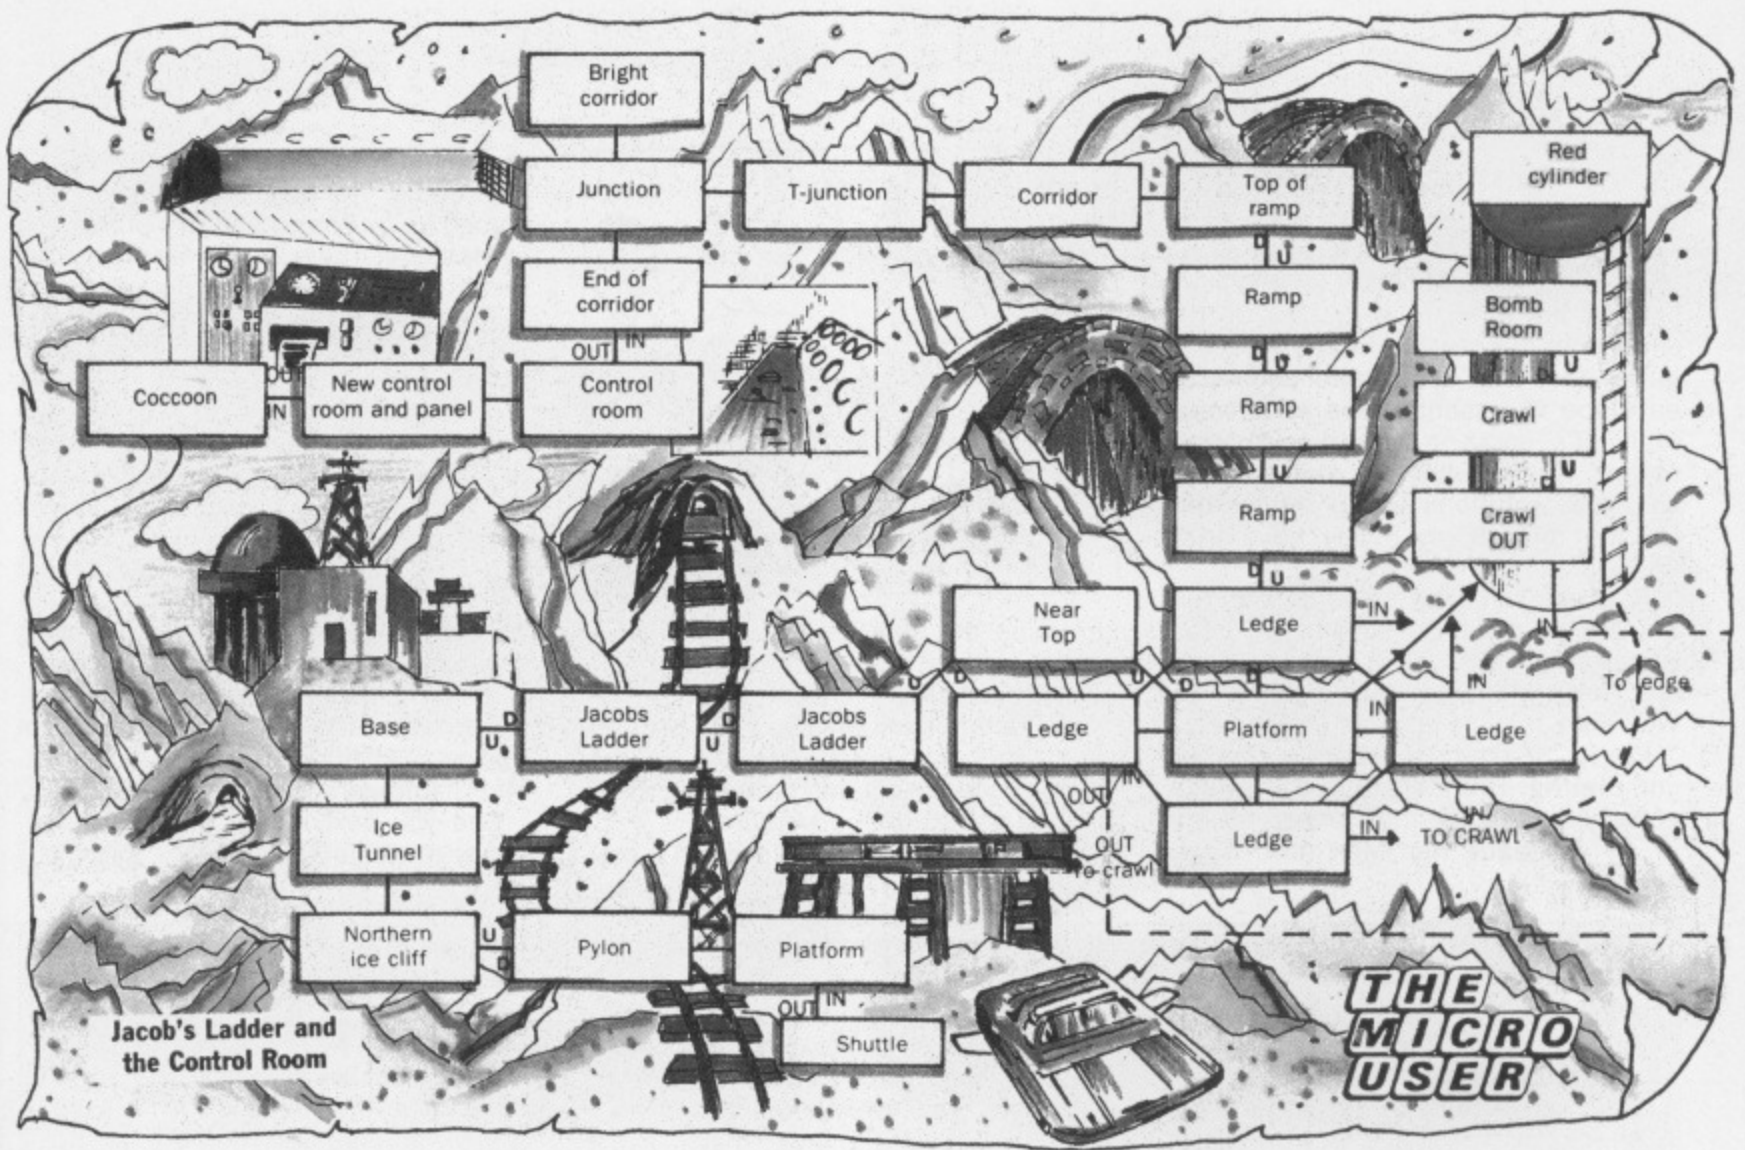

Part 7 of Stuart Booth's Snowball map - Jacob's Ladder and The Control Room

tion you are playing - apparently it is the store for all objects finished with or else not yet activated.

It is quite clear to me that The Lord of the Rings is as bug infested as The Hobbit was. What a pity that the programmers weren't both a little less ambitious and a little more painstaking. However, I imagine they were under pressure from people who wanted to see a supposedly marketable product at any cost.

I confess that, having run through The Lord of the Rings once for the purposes of this column, I put it aside as not being worth serious play. Sadly, this was like so many of the offerings from Melbourne House.

Tim Clapp provided a list of the vocabulary in Circus; he very properly deleted the naughty words before sending it on to a sensitive old codger like me.

Finally, Tim wonders if the barrel in Citadel has any other use apart from being an alternative method of getting into the witch's house.

I've had a charming letter from Stephen Gilbert on Countdown to Doom and

Rebecca Wombwell's problems (see the September issue of *The Micro User*). In particular he deals with the mazes: For the first, try F, R, R, R, F, R, picking up the discs as you go. Next go D, E, take reactor, W, N, Say FLEZZ, N, NW and insert the-discs into the computer in the order you discovered them.

The swamp maze has to be mapped by dropping objects: Since you can't see in this maze, you have to enter GET and INV in every location to see what you've actually picked up - ingenious.

Stephen has troubles with Dungeon Adventure, my Level 9 favourite. The silver mask is a treasure; eat the invisible objects to avoid the troll and pass on to his sweet smelling home. The rock with swirling grooves is just scenery, the green gem simply needs smashing and the buttons on the throne need pressing. Have fun.

Iain McLaren has some interesting observations on The Hulk. If you enter P or T the display comes up with DID:64, DID:56, DID:64, DID:56 and so on. If he then entered X or V the program seemed to be working but the DID statements kept appearing: Why is that?

He would like to leave the underground room, pass the chief examiner and the warp area beyond the treasure depository. Comments and suggestions welcome.

Dave Martin is drawing up maps for Ravenskull (thanks): In the meantime he confirms that Ravenbees can only be killed with bow and arrow on screens 3 and 4. Screens 1 and 2 need careful timing to pass the bees. In the final section of screen 1 there is another scroll - it's deadly.

Kristoffer Gavin (who didn't give his

Turn to Page 44 ▶

Hall of Fame

Marcus Turner has sent in a succinct solution to **Lords of Time** with detailed maps of the mazes: He also sent solutions to a number of lesser adventures. Thanks.

Richard Entwistle has sent me a perfect logical map of **Twin Kingdom Valley**. I am grateful.


◀ From Page 43

address) asked for complete solutions to several games: For the sake of all my readers I have to say that I can't oblige.

There are three reasons: One is the sheer cost of photocopying, the second is the fact that a stamped addressed envelope is essential for a personal reply (it's amazing how many of you forget); and the third is that sending complete solutions would render this column redundant. I may have Irish ancestors, but we aren't daft.

Kristoffer has learnt that in the Price of Magik, if you CAST BOM or CAST ESP in seemingly unlikely places, you may learn an awful lot to your advantage. Well done.

Philip Sharpe hoped for tips on completing Thunderstruck by Audio-genic: I really think that is the province of my colleague Hac Man now; if you

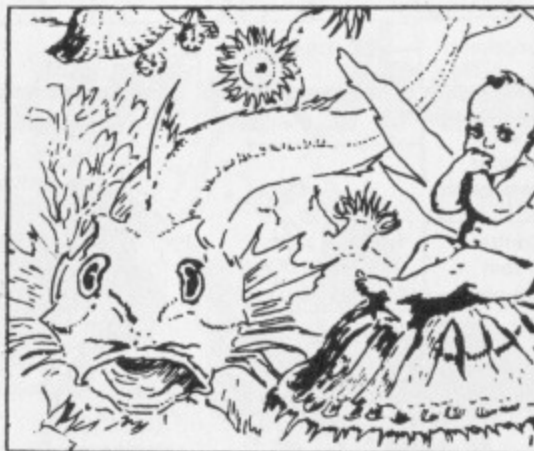

examine the June issue of *The Micro User*, you'll see his map of Thunderstruck II.

So Philip, if you write to Hac Man and ask nicely, who knows? He and I agree that arcade adventures tend to be more arcade games than adventures.

Stop press: I have just received a pre-

production disc of a revised Village of Lost Souls. The Magus team have been signed up by Robico and this production is Master-compatible, so expect a comment on this new version next month.

The cassette for model B/B+/Master costs £9.95 and the disc version (with extra features) is £12.95.

A Master-compatible version of Robico's *The Hunt* has also just arrived – first glance suggest the usual high quality; I'll have a full review ready for next month.

Incidentally, Rob O'Leary tells me that he is working on versions of their adventures for the Archimedes. I am saving very hard indeed.

You'll find their games in good software dealers or via mail order from Robico, 3 Fairland Close, Llantrisant, Mid Glamorgan CF7 8QH.

See you next month and until then, happy adventuring.

Helpline

Robert Wainright mailboxed a query: How does one light that wretched lamp in **Kingdom of Hamil**? Simply type ON. I had to go back to the adventure, check with my *Electron User* colleague Pendragon and still almost drove myself insane providing the answer. Why not provide the grammatical and obvious LAMP ON?

Verbs (if one can call ON a verb in this context) should nearly always have nouns: If we don't look after grammar, we are reduced to the kind of illiteracy which produces media morons who talk about *government* without any qualifying article, because they appear not to know that a common noun always requires an article.

David Cornish (age 11) has offered some help for teacher John Sanderson who had queries on the mathematical adventure game **L** (see the June issue of *The Micro User*). The Cook is 7, 11, 8 and the electrician is 4, 2, 1, 2.

To escape the drogo guards, type the square root of their number. The ape can be turned into an owl by typing APE AWE OWE OWL and the magic word is NEUMANN.

If you want the bottle and phial, enter PLAY PIANO and EWQEWQTRRE-TRRE; if you want to put shapes into the bath enter USE (shape).

The solution to the spiders web is r,r,r, l,l,l, r,r,r, l,l,l, r,r,r, l,l, r,r, l,r, l,r.

Finally, the main answer to the problem is to go to the telephone room, ring 610 until the abbot answers, drop everything, push chest and go through the drogo maze.

Thanks to Bill Hensman I now have a complete solution to this adventure; I shall feature it as soon as space permits.

Wyndham Townend offers advice on killing the vampire in **Kingdom of Hamil**: Lead him to the Tapestry Room and open the curtains (similar to a certain horror film I notice).

Steve James can't find the Will in **Philosopher's Quest**: It's in the hall of the bungalow where the little old lady lives, but you have to do a lot of dog retrieving to find it. A full solution to this adventure will appear soon.

Steve is also stuck in **Hampstead**: What does he do after getting a job at the Bank, reading the memo and opening the filing cabinet? Going to the Boardroom and voting option 3 will get him advancement.

Help for Todd Newman comes from Mrs B. Gibbs: In **Denis through the Drinking Glass**, Drop ticket (bought from the policeman outside No. 10), take wire and run. She adds that one should not forget to drink every tenth move.

Classic Adventure: The (dynamite) rod should be found at the finish of the adventure in the vast hall. Take it, NE, drop rod, SW, BLAST and there

you are.

Kay Chappell offers some help with **Wizard's Challenge**: Once you have collected everything of value from the classroom area and you have got rid of the bully, go to the Music Room and SING. Apparently she has a complete solution – I'd love a copy.

Kay has problems in **Labyrinths of LaCoshe**: Having collected all the treasures and performed all the tasks, she is still five points short of being allowed to open the door to Hades. I have examined Roger White's dissertation on the game and I wonder if she has completed the adventure in less than 136 moves.

I shall be including extracts from Roger's analysis of Labyrinths of LaCoshe some time next year, not only to help people, but also to show how philosophers approach adventures.

Kay is stuck in **Haunted Abbey** as well. I haven't completed this game, but a way of obtaining the listing was mentioned by my predecessor, Alice, a couple of years or so ago: She got it from a Cornish clergyman I seem to remember. Start to load a saved position then press Escape before loading is complete. After that you can list the game.

Kay is stuck with the trendy troll, can't escape the amphitheatre or the monster's head and would like to avoid drowning. I should be glad to receive legitimate solutions.

OPUS DRIVES A BETTER BARGAIN



2 Megabyte Dual Drive

Only £209.95

5 1/4" double-sided 80/40 track hardware switchable. Formatted capacity with DDOS 1.4 Mb.



1 Megabyte Single Drive

Only £109.95

5 1/4" double-sided 80/40 track hardware switchable. Formatted capacity with DDOS 720 K.

Whichever way you look at it – price or performance – these 1 and 2 Megabyte disc drive bargains from Opus take some beating. With prices that include VAT and FREE delivery anywhere in mainland Britain, it's hardly surprising they're Opus best-sellers.

Quality Opus Disc Drives

As a major supplier of disc drive products to the home, education and business markets in Britain, the Opus name is your guarantee of quality. Both our drives feature reliable direct drive mechanisms, lower power consumption and fast track access times.

The Opus DDOS

Choose either of our special drive bargains and we'll reduce the price of our double density disc interface by a third! It's yours for just £40 instead of the normal asking price of £60.

The Opus DDOS uses the BBC B+ disc controller chip for compatibility with all leading software titles. It can also handle tape to disc transfers, includes Format and Verify utilities on ROM and has a powerful machine code operating system with up to 248 files.

To order your drive and take advantage of our special DDOS offer, call Opus now on **0737 765080** or simply post the coupon below.

To: Opus Supplies Limited, 53 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)

- _____ 1 Megabyte (unformatted) System(s) at £109.95 each
 _____ 2 Megabyte (unformatted) System(s) at £209.95 each
 _____ Opus Double Density Disc Interface at £40.00 each
 (Only when purchased with drive)

I enclose cheque for £ _____ or please debit my credit card account with the amount of £ _____

My Access Visa no is:


NAME _____

ADDRESS _____


TELEPHONE _____

Opus. MULTI

Every **PLOTMATE** picture tells a story

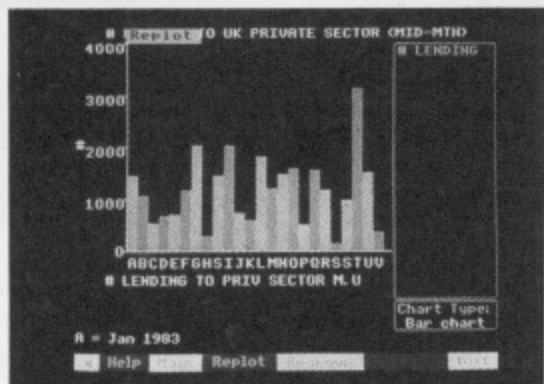

DOMESDAY
A typical bar chart from the Domesday database. Hard copy is obtainable via the Plotmate BBC Welcome disk.

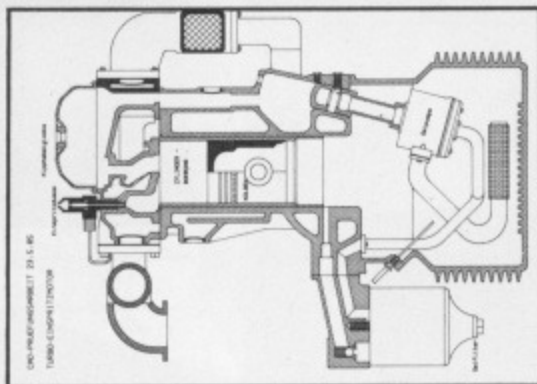


CAD
Example from SUPERDRAFT running on the NIMBUS.



DIGITISING
Map of Europe digitised and edited using LINMAP software.



IMAGE SCANNING
Linscan screen file of 'MONA LISA' incorporated into AMX PAGERMAKER.

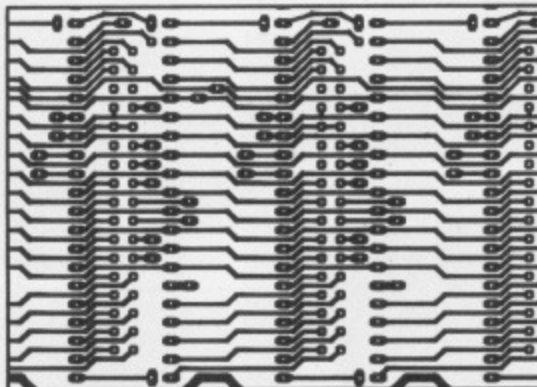

PCB DESIGN
Using LINTRACK, a Printed Circuit Board design package.

ESS
20%-30%
DISCOUNTS

ESS
Linear Graphic's unique educational discount scheme.

PLOTMATE is one of the most popular graphics plotters used across the entire curriculum in education.

Sophisticated and inexpensive, Plotmate provides high definition plotted output and high resolution scanned input when used in conjunction with the LINSKAN Image Scanner.

MICRO COMPATIBILITY

Plotmate is compatible with all leading micros including the BBC, NIMBUS, IBM PCs and PC compatibles, such as the AMSTRAD PC1512.

CAD

Plotmate runs from many leading BBC packages including BITSTIK, AMX DESIGN, the REALTIME GRAPHICS SYSTEM and LOGOTRON LOGO. When the on-board graphics language range is extended, Plotmate 'M' models understand commands from HPGL 7475A/7470A industry standard languages enabling compatibility with a wide range of professional third party software including AUTOCAD, AUTOSKETCH, SUPERDRAFT, SCRIBE MODELLER and MICRODRAFT.

PCB DESIGN

LINTRACK is a sophisticated, low cost, CAD package which allows the creation and revision of printed circuit board artwork. BBC, Nimbus, IBM PC and Amstrad PC1512 versions available.

IMAGE SCANNING

The LINSKAN range of image scanners can create image files for most popular Desktop Publishing and Art packages.

AMX PAGERMAKER, FLEET STREET EDITOR, IMAGE, ARTROOM and ACE can process image files created by Linscan (for the BBC).

ALDUS PAGERMAKER and NEWSPAPER can use image files from Linscan (for the Nimbus).

GEM PAINT, XEROX VENTURA PUBLISHER, and GEM DESKTOP PUBLISHER can utilise image files created by Linscan (for IBM PCs and PC compatibles).

DOMESDAY

All Plotmate Welcome disks allow WRITE Files containing tabular data from the Domesday database to be reprocessed in pie, bar and line chart format on the BBC Master.

EDUCATIONAL DISCOUNTS

Linear Graphics offers the unique Educational Support Scheme (ESS) whereby savings of between 20%-30% on all Plotmate plotters, associated software and add-ons are available to all educational establishments. FREE training is offered with quantity orders.



PLOTMATE
LINEAR GRAPHICS LTD
28 Purdeys Way Rochford Essex SS4 1NE
Tel 0702 541663/4/5 Telex 995701

Please send me details on Linear Graphics' products. I am particularly interested in (please indicate)

NAME.....
POSITION.....
ESTABLISHMENT.....
ADDRESS.....
.....
.....TEL.....

PROBLEM SOLVED

Master tapes

DO you know of any company that has manufactured a peripheral enabling me to use cassette tapes on my Master Compact 128? I would like to put my tape copies of Basic games on to disc. — **A. Brigg, Keighley, West Yorkshire.**

● No, as far as I know no one is producing such a device. It would be quite tricky to make as you would also need to supply the software to intercept the *TAPE command, as this does nothing on the Compact.

Is there a gap in the market that some manufacturer would like to fill? I somehow doubt it.

Bothersome beep

I HAVE a BBC Micro and after some years of trouble-free service it has developed a problem at switch-on. Recently it often gives a long, single, low-tone beep, with both Caps Lock and Shift Lock lights coming on together, and nothing on the screen.

If I switch off and try again it sometimes repeats this sequence, but often behaves normally — beeping twice and starting up. It appears to be a random choice whether I get a normal start or not.

Giving the machine a jolt sometimes helps, but I am haunted by the fear that one day it may refuse to come on at all. — **L.E. Scull, Backwell, Bristol.**

● All BBC Micros give a continuous tone when they are not working, so there is no pointer there. The clue is that this is an intermittent fault and giving it a swipe sometimes persuades it to toe the line.

All this points to an intermittent mechanical connection. The area most likely to fail in this way is the connecting cable between micro and keyboard. Try removing it and putting it back again. This often seats it properly and will give you a few more years of service without problem. A new one can often help.

The problem could also be a pin bent under an IC, or a faulty IC socket. Having said that, locating it could be tricky and you might be better off sending your micro to a repair shop.

Crossed pins

I HAVE been reading *The Micro User* for about two years now and have always read Problem Solved with great interest and now I have a problem for you. After doing some work involving the analogue port I managed to cross two wrong pins somewhere. These controlled the first joystick's fire button and now the micro

is continually firing when a game is running.

Mine is an issue 7 model and I have tried replacing the D7002C but discovered this seems to control only the joystick movements, not the firing action. Can you tell me what else it could possibly be? — **Derek Weeting, Houghton-le-Spring, Tyne & Wear.**

● I am surprised you managed to damage your micro in this way by simply mis-wiring the analogue input port. I am sure you did something else more nasty to the poor thing.

The chip that controls the fire buttons is the system VIA, a 6522. This is a 40 pin chip (a big one) and is located next to the keyboard connector. You could swap it with the other 6522 next to the user port plug. If you do this bits 5 and 4 of the user port would not work, so if you use them you will have to obtain a replacement chip.

Sound sampler

I WOULD be grateful if you could let me know whether you have covered the construction of a digital sound sampler for the BBC Micro in past issues of *The Micro User*. If so, where can I obtain all relevant information, such as PCB layout and components list? — **Christos Yianni, London W9.**

● A digital sound sampler was published in the January 1986 edition of *The Micro User*. Unfortunately all the printed circuit boards have been sold, so the kit is no longer available. However, if you send a stamped addressed envelope to Musbury Consultants they will send you a photocopy of the PCB layout. As this is a double-sided plated-through-hole design it would be difficult to make yourself and you may need professional assistance.

Sideways software

I HAVE just purchased a watoru rom/ram board but am still in the novice category. I would be grateful if you could tell me of any text book, manual, literature or past issue of *The Micro User* which gives a basic description of the software behind sideways rom/ram. — **G Abraham, Preston.**

● The best guide to the operation of sideways memory is in the *Advanced User Guide*, but this is a little technical for some readers. The basic theory is simple — sideways memory is simply an area from address &8000 to &BFFF that

can be derived from one of up to 16 different devices, and it usually contains machine code programs.

There are a few books devoted to the subject and you'll find several advertised in *The Micro User* by companies like *Watford Electronics* and *Technomatic*. One of the books is by Bruce Smith and called *BBC Micro Sideways Roms and Rams* and costs £9.95.

Loading problems

I HAVE a BBC Micro with a Prestel chip fitted and have problems loading some games from tape. I dare not buy a game unless I know it will load in case I'm wasting my money.

As a new BBC Micro user I don't have the slightest clue to what is going on. Could you put me in the clear — **S. Creed, Surrey.**

● It could be the Prestel chip causing problems so why not try removing it first? However, it is most likely to be a problem of head alignment on your recorder. If tape recorders were intended to be used on computers they would have been designed with a larger bandwidth. Most experienced micro users know about this but it is worth repeating for newcomers.

Next to the recording head on your tape recorder is a small screw which is sometimes accessed through a hole or you might have to remove a panel. While you are playing and listening to your tape if you adjust this screw you should hear the sound go between muddy and bright. It is this bright sound you want, and the game should then load without problems. You might need to repeat this for different tapes and choose the best compromise.

Logging data

THERE are occasions when it would be useful to have a record of, say temperature, over a period of a day or a week even. One way of doing this might be to use an A/D converter and leave my BBC Micro running — but this does not seem to be very attractive.

Could you suggest some way of recording such a signal from say temperature, pressure and humidity, at say, hourly intervals, either in digital or analogue form for a period of a day for instance, and then feeding the information into the micro. — **B.A. Freake, Louth, Lincs.**

● It's amazing how the wheel comes around full circle. What you are describing is known as a data logger and they have been around much longer than

Turn to Page 48 ►

◀ From Page 47

personal computers.

The only problem here is the cost – most data loggers will cost you more than your micro. In fact one of the first uses of personal computers was to use them as low-cost data loggers.

There is nothing wrong with leaving your micro turned on all the time, and remember you don't have to have a monitor connected or switched on for it to work. Or you could turn your micro on and off with a time switch and set link 5 on your keyboard to make it execute a !BOOT file each time it is switched on.

Using two DFSs

I HAVE a BBC Micro with DNFS 1.2. I am thinking of purchasing a Winchester drive, but I will need ADFS with the 1770 FDC. The problem is that I have some hardware that will only work with the DFS I have.

Is there any way in which I can swap over the two FDCs without changing chips. – **Michael Pargeter, Hitchin, Herts.**

● You can get an Acorn DFS that uses the 1770 chip and an adapter board to change the disc controller chip. This can be installed in the BBC Micro along with the ADFS.

Make the ADFS the top priority chip then on power up you hold down the D key and the DFS initialises. I use this

method to run both the Watford and Acorn DFS's in my machine at the same time.

Moving memory

I HAVE an issue 7 BBC Micro and when I used a memory editor I noticed that several locations are unstable. Their contents change at varying speeds from once every second to so fast that it is a blur.

When I placed the cursor within one section of memory, the cassette control relay switched on and off very rapidly. Have you any observations on my problem? – **Paul Downes, Anfield, Liverpool.**

● There is absolutely nothing wrong with your micro. Several memory locations are constantly changing during its normal operation.

The BBC Micro is continually being interrupted by various devices and what you are seeing is the result of these interrupt service routines. For example page 01 memory (from 0100 to 01FF) contain the stack for the processor. Any call to subroutine or interrupt service routine will use this area to store the return address. Locations in page 02 contain the variables used to keep track of the video display and page FE contains the machines internal hardware interface area.

Finally, the simple act of running your

editor utility will affect some areas of memory, and this is what is causing the cassette motor to toggle. For a full explanation of the micro's memory locations and what they contain see the Advanced Users Guide.

Battery operation

I HAVE a BBC Master 128 and will be living in a caravan without mains electricity for a few months.

The news in the September edition of *The Micro User* reports on a circuit you designed to power a BBC Micro using a car battery. In addition to the micro I have a BMC (BM-12A) monitor, a Cumana double disc drive and a Taxan (KP810) printer. Could I use dry cells to power all my equipment? – **Peter Hawksley, Swaffham, Norfolk.**

● It is possible to run most of this from batteries but it will be pricey. The circuit was published in the April 1987 edition of *The Micro User* but would allow you to run only the micro and a single disc drive. To run a second drive of a double drive you would have to duplicate the circuit. It is a simple matter to power the two drives separately.

As to the printer, it probably requires +5V and +24 volts. It should be possible to get this out of the step-up circuit by changing the ratio of R5 to 18k



Your technical questions
answered by MIKE COOK

PROBLEM SOLVED

meter. However, perhaps the simplest way is to trace the track from the IC to the furthest key in this group (in this case the left-hand pin as you look at the tracks, of the > key). Then solder a wire link from this key back to the IC.

Using Trak-ball

AT the moment I use a Quickshot II joystick on my BBC Micro via a Proteck joystick interface in the analogue port. I was wondering if I would be able to use an Atari Trak-ball to control games via the same interface. — **Richard Walker, Aberystwyth, Dyfed.**

● Yes, the Trak-ball will produce the same sort of signals in the JS mode as a Quickshot II.

(Figure VII in that article) but I am not 100 per cent certain if it will supply all the necessary current. You will have to remove the printer's power supply, again a simple plug and socket job.

There is not much hope with the monitor so the best bet is to get a battery/mains TV set.

You need three Body Build packs No. 41(a), and assembled it would cost you £168. You would also have a lot of rewiring. If I was in your position I would look at the small diesel generators that are available quite cheaply. At least after your time in a caravan you could recoup some of the money by selling it.

Tracing cracks

Certain keys on my BBC Micro 0,=,@,X,P,<,> and + have suddenly stopped working, for no apparent reason but the keyswitches themselves seem to be in perfect working order. — **Alan Horn (15), Chester-le-Street, Co. Durham.**

● All your faulty keys are on the same line from pin 9 of IC3 — the 7445 on the keyboard. Also on this line is function key f9. If this still works there is a crack in the printed track after this key. If this is faulty the crack is somewhere else.

Either way, you could go crack hunting with a magnifying glass and continuity

Interfacing plotters

I HAVE access to two types of XY Plotters and would like advice on the best method of interfacing them with my BBC Micro.

The XY Plotters I could use are a Heath Servo-Recorder Model EU-2B or EUW-20A, and a Gould Model 50A3 AS 258F with 10S 7723497 amp 10S 7723493 time base.

If either plotter is suitable, it would save a considerable sum on buying a new one. — **Derek Lydiate, Wolverhampton.**

● Unfortunately both these plotters are designed to plot analogue voltages rather like an oscilloscope. They can be driven with both X and Y analogue or X on a time base and Y analogue but they were not meant to be driven from a digital computer.

However you could fit digital to analogue converters to the user and printer ports and feed these into the X and Y inputs of the plotter. You would then have to control the pen lift mechanism, say, with the cassette relay and write some software to control it. Unfortunately the resolution would only be 256 by 256 points.

To get better resolution from the set up you would need better D/A converters, say, 12 bits or 1024 points and hang them on the 1MHz bus.

WATCHING YOUR BBC PROGRAMS ON TAXAN'S SUPERVISION 620 OR 625 IS A FEAST FOR THE EYES. BECAUSE THEY'RE PROFESSIONAL COLOUR MONITORS THEY GIVE YOU A BETTER QUALITY PICTURE THAN EITHER A TV OR MEDIUM RESOLUTION MONITOR. AND WITH THEIR SUPER HIGH CONTRAST TUBES (FOR SHARPER TEXT AND MORE VIVID COLOURS) AND FOUR SWITCHABLE COLOUR TEXT MODES, THEY MAKE EXCELLENT VIEWING. (HOWEVER IF YOU PREFER TO WATCH IN MONOCHROME ONLY, TAXAN HAVE A RANGE OF MONITORS - THE KX117, KX118 AND KX119). TAXAN ALSO OFFER TWO BBC COMPATIBLE DOT MATRIX PRINTERS, THE KP815 AND KP915. THEY'RE QUICK AND QUIET AND BOTH PROVIDE NEAR LETTER QUALITY. SO NOW YOU'VE SEEN OUR IMPROVEMENTS FOR THE BBC,™ GIVE US A RING. WE'D LOVE TO HEAR YOUR POINTS OF VIEW.

TAXAN
A KAGA COMPANY
PERFECTING THE IMAGE



TO FIND OUT MORE ABOUT THE TAXAN RANGE OF PRODUCTS, CALL US ON 0344 484646.

All this in just

```
Time 0.17 54 Words 3544 Free
Insert Characters
START
July 23, 1986
Dear Douglas,
Further to our telephone conversation
yesterday, I have pleasure in enclosing
a pie chart showing the breakdown of our
fixed costs for the year.
As previously discussed with yourself, I
will be travelling down by train next
Thursday morning.
I look forward to meeting you then.
Yours sincerely,
Jeremy Brood
```

WORD PROCESSOR

Compose a letter, set the print-out options using embedded commands or menus, use the mail merge facility to produce personalised circulars – and more!

```
Used 11 Free 32 Len 127 Rec 1
Surname Wooller
First name Douglas
Address1 Hallwood House
Address2 Hallwood Road
Town Stockport
Post code SK5 4QP
Credit lim 10000
Discount 30
Use *, +, -, v, ESCAPE, <N>ew, <E>dit,
<D>elete, <M>arker, <P>rint
```

DATABASE

Build up a versatile card index, use the flexible print out routine, do powerful multi-field sorting, perform all arithmetic functions, link with the word processor – and more!

```
Mini Office II Label Printer
#####
# Douglas Wooller #
# Hallwood House #
# Hallwood Road #
# Stockport #
# SK5 4QP #
#####
Use Cursor Keys To Move
# Followed By A Number For Field
ESCAPE To Exit TAB To List Fields
```

LABEL PRINTER

Design the layout of a label with the easy-to-use editor, select label size and sheet format, read in database files, print out in any quantity – and more!



...and at a price

Mini Office II is a comprehensive integrated suite of programs setting a new standard in home and business software.

These sample screenshots illustrate just a few of the wide range of features, many of which are usually only available on software costing hundreds of pounds. Most are easily accessed by using cursor keys to move up and down a list of options and pressing Return to select.

Mini Office II takes over where the original, highly successful Mini Office left off, with numerous extra features, two additional modules, a program to convert existing Mini Office files to Mini Office II format, and a 60 page, easy to follow manual.

And it's at a price everyone can afford!


DATABASE SOFTWARE

Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY

Now available on a power-packed rom board!

- Four 32k roms on one board packed with 128k of super fast machine code.
- Easy to install – no soldering needed.
- Split second application selection.
- Frees valuable ram space for much more data.
- Fully compatible with the whole BBC|Micro range, Aries or Watford shadow ram board, and tape, DFS, ADFS and ECONET filing systems.

...t ONE package!

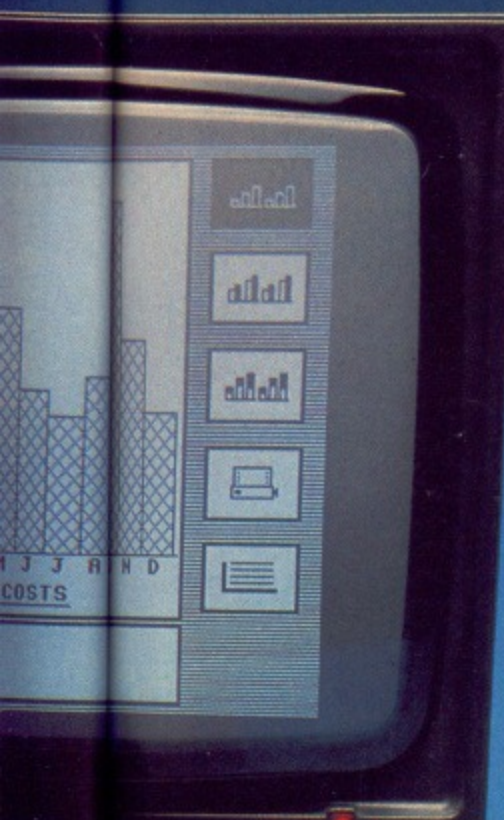

SPREADSHEET
Prepare budgets or tables, total columns or rows with ease, copy formulae absolutely or relatively, view in either 40 or 80 column modes, recalculate automatically – and more!


```

Freespace= 3750      Auto
Cell=A1             Text
Contents=           Fixed
    
```

| | A | B | C | D |
|----|----------------------|-------|-------|-------|
| 1> | Fixed Costs for 1986 | | | |
| 2 | | Jan | Feb | Mar |
| 3 | Rent | 400 | 400 | 400 |
| 4 | Electric | 60 | 50 | 45 |
| 5 | Telephone | 130 | 125 | 115 |
| 6 | Salaries | 2450 | 2400 | 2400 |
| 7 | Cleaning | 80 | 80 | 80 |
| 8 | Stationary | 55 | 50 | 50 |
| 9 | Postage | 375 | 360 | 355 |
| 10 | Carrier | 420 | 380 | 330 |
| 11 | | | | |
| 12 | | | | |
| 13 | | | | |
| 14 | TOTALS | 3970 | 3845 | 3775 |
| 15 | | ***** | ***** | ***** |
| 16 | | | | |
| 17 | | | | |
| 18 | | | | |

MASTER DISC NOW AVAILABLE!

GRAPHICS
Enter data directly or load data from the spreadsheet, produce pie charts, display bar charts side by side or stacked, overlay line graphs – and more!

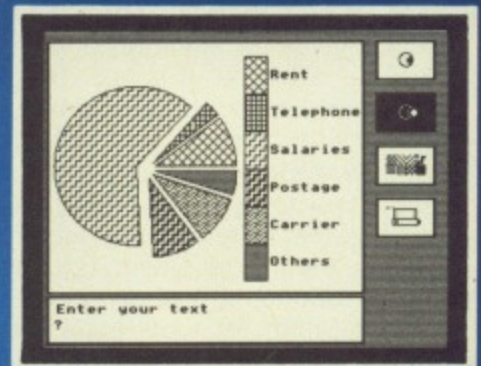

COMMS MODULE
Using a modem you can access services such as MicroLink and book rail or theatre tickets, send electronic mail, telex and telemessages in a flash – and more!

```


>br
*****
British Rail Service
Tickets / Fares / Timetable
*****
(c) Database Publications

1 * Ticket Bookings
2 * Pullman/Steam Bookings
3 * Seat Reservations
4 * Sleeper Reservations
5 * Pullman Rail
6 * Steam Excursions
7 * Electric Express - Newsletter
8 * Timetable and Fares from May 12th

* Hn for HELP
1-8 R(edisplay) Q(uit)
Select : 1
>
    
```

...e that can't be matched!

INSTANT Mini Office II

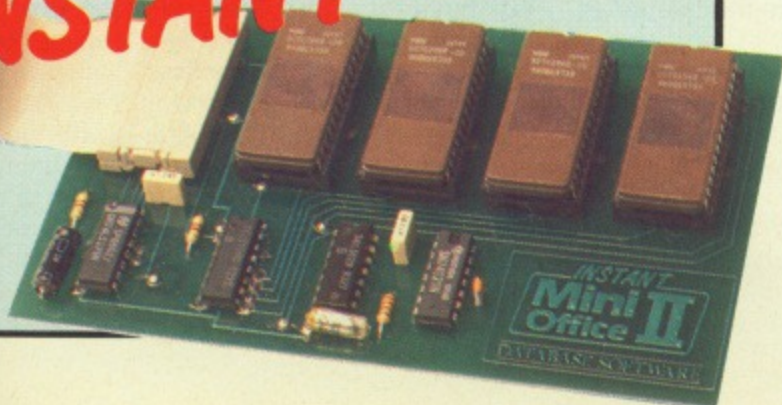

Mini Office II

- BBC B, B+
- Cassette..... £14.95
- 5¼" disc..... £16.95
- MASTER**
- 5¼" disc..... £19.95
- COMPACT**
- 3½" disc..... £21.95
- INSTANT MINI OFFICE II**
- On rom for full BBC range..... £59.95

Turn to order form on Page 149

**Discover the
inner secrets
of arcade
games with . . .**



THIS month's column features, by popular demand, a complete solution for Cholo, Firebird's wonderful 3D strategy game.

This latest mega-game seems to have captured more imaginations – and postage stamps – than anything since Repton 3, and it's certainly drawn more pleas for help than any other.

Cholo gives a first impression of being another Elite – it's an (initially) immensely complicated game that comes with a map and instruction manual/novelette, and features Elite-style 3D vector graphics. It is, however, an altogether different proposition.

Many thanks to David Backhouse, Stuart Booth, Stephen Levin and Michael Smith for their excellent tips, which now follow:

The game starts with you controlling Rizzo, a RatDroid, who is wandering around Cholo's Central Computer building. Use the map in the manual to find the Cyber 1 computer, and log on by colliding gently with it.

Read PassITXT into rampak 1 and then run it. This gives you a list of passwords, which can be used to control the many other robots you will find along the way. Don't forget to write them down.

As you leave the building you will find a small robot travelling along the street in front of you. Chase it and shoot it until you get a message saying that it is temporarily paralysed. Stop shooting immediately – this isn't Elite now, you know! Log into this robot with the password PLUGIN and you now have control

Stryker cheat

*Steve Botterill of Superior has told me about a cheat mode built into the enhanced Master version of **Stryker's Run**. When the title page is on the screen, hold down the keys C, H, R, I and S (for Chris Roberts, the author). Then start the game and you will find it frozen, but you can move the screen left and right by using the cursor keys.*

Cheat modes in games are always interesting, but I'm sure this one's just to let you admire the pretty graphics.

of Igor the Hacker.

You can use this same method to take control of Guard robots by using the password XXXXXX. However, you lose control of them once you move out of their allocated area.

Take Igor back to Cyber 1, where you will find RadarPRG – a short range radar scanner. When this is on, your position is shown in the centre of a large scale map of the surrounding area. It is a good idea to share important programs between droids, because when a droid dies all the information in its rampaks is lost.

Switch back to Rizzo and search around the buildings until you see Anneka the Flying Eye coming in to land. Disable her in the same way and log into her with the password Brazil. Fly her to Logic Island and position her on the triangular-shaped teleport pad. Leave her there and switch control to Igor.

Guide the Hacker to Group Pier where you will find another teleporter. Move on to it and he and Anneka will change places. Enter the church, where you will find another computer, Cyber 2, against the far wall. Don't worry about the robot guard immediately inside the door, it's dead.

When you log on you will find two programs, ReadmTXT and SurvPRG. The former is simply a credit for the authors but the latter switches on two vidbots (camera robots), Ridley and Fellini.

Although they appear to be sitting in the sea in the south-east quadrant of the map, they are in fact located on an unmarked radioactive island. Ridley is particularly useful, because he is permanently located in a room.

To save your current position simply select Ridley, then press Escape followed by f0. Go back to the teleporter and return to Group Pier.

Next go to the bridge by the McNeil river, but don't go across just yet. Transfer control to Rizzo and take him to the bridge as well. Switch to Ridley and save the game.

As Rizzo, race across the bridge as quickly as possible, swerving from side to side to avoid bumping into the guards, but don't fall in. And don't bother

Firetrack debugged

*Many owners of the Watford Electronics DFS will have found to their chagrin that the (much better) disc version of megablast **Firetrack** has hitherto been denied to them. I'm glad to report that the program's disc loader is now fully debugged and works, not only with the Watford DFS, but also on their rom/ram card.*

Maybe I didn't need to sell my BBC Micro (which had both) after all. Anyone with an early version of the game should contact Electric Dreams for an immediate upgrade.

retaliating – it only wastes time.

When you finally get across you'll see pyramids on either side of the road. Follow the road and turn north after the third pyramid. In front of you will be a truncated pyramid. Go in the door on the north side.

Inside you will find a computer (Cyber 3) and a line of five apparently dead robots: A rat, a guard, an autodoc (revealing what one looks like), a hacker and a giant robot of a previously unseen type. The fifth is in fact not dead: He is Gort the Leadcoat, a powerful ally. After paralysing him, log on with the password KLAATU.

You now come to the difficult part: How to get the comparatively delicate Igor across the bridge. I have found the best method to be as follows:

Take Gort outside and move onto the eastern end of the bridge. Take control of Igor and move across the bridge, dodging the guards until his damage nears its limit. Switch to Gort and paralyse all the guards. Then guide Igor across at your leisure followed by Gort.

Once across, visit the Alan M Turing Science Institute (the building with the radar scanner). There you will find three computers, each designated Cyber 5. Logging on to any of them gives immediate control of Queen (a ship) and also access to a program, Hack1PRG. Next go to Cyber 3. If you already have



SERIES

B B+ M

Hack1PRG, you will find a program called Hack2PRG. If not, you will be denied access. Return to the bridge and transfer both Hack programs to Gort.

Select Queen, and dock with the end of the pier in the harbour – not, take note, the one on the headland to the east. It's quite tricky, and may take several attempts.

Return to Gort, cross the bridge and go to the harbour, where you will find another teleporter pad in front of the eastern pier. Position yourself on it and you will be transported into the ship's hold.

Transfer control back to Queen and sail to the radioactive island, using the positions of Ridley and Fellini on the main map to guide you.

On the way you will notice a number of Rats swimming around you. Stuart points out that Rizzo can also swim. Take him in the ship instead of Gort.

You won't be able to move or use him, since he's still in the ship's hull, but if you move Queen elsewhere you'll find that Rizzo is now outside on the surface of the water.

You can just steer him towards the land. Once on it, however, don't take them back into the water or they'll die. This technique is re-usable. Also, before re-taking control of any seafaring droid after you've taken control of a landlubber droid, make sure you take control of Queen first, or it'll die with a splash.

Dock at the right-hand side of the pier on the island and transfer control to Gort, who will then disembark. There are five buildings on the island: Go in the door on the central one.

Located inside is another computer, Cyber 4, in which you will find two programs, AtmosTXT and C-C-CTXT. The former gives you the location of the Bunker Cap – the sealed entrance to the humans' underground bunker. Deeper inside the same building you will find Ridley and Koke, a Coca-Cola machine.

Disable Koke very carefully – reading C-C-CTXT will tell you that it is actually an armed bomb – then log into it. Take both Gort and Koke back to Queen and return them, one at a time, to the mainland.

Take Gort to the Cassadra aerodrome and locate Aviata, the plane at the northern end of the runway. Paralyse it, then transfer control to Koke, guide him to the plane and get on board.

Take control of Aviata and fly to the Robot Citadel, labelled Manic Mine on the map. It looks like a pyramid, but you'll soon know when you're near because ground-based robots will start using you for target practice.

Crash Aviata into the Robot Citadel to explode the bomb and destroy the Bunker Cap. With a fancy firework display in the background, a message appears thanking you for freeing the people of Cholo. The game is now completed.

The other robot you will encounter is Dr. John, the unknown autodoc. I never use him myself, but he can normally be found wandering around somewhere to the right-hand side of the bridge. Log into him using the password STETHO.

David says that the doctor can log into Aviata without paralysing him. To do this you should use the password FLYBOY.

Cholo is indeed a superb game – one that, once finished, you could keep coming back to time and again. I must say I was mildly irritated by the fact that you can only save the game while controlling a robot that is inside a building. But that's about my only complaint, and even that faded once I'd gained control of Ridley.

The only other points are a couple of possible bugs. I once logged into Igor along Bridge Street only to find Surv-PRG already in his rampak. The other occurs if you paralyse and take over a guard which is subsequently killed. The "robot select" page appears and the available robots are scanned through very rapidly, but the game no longer recognises any keyboard input. The only way out is to press Break.

● *That's all for now. Next month's goodies will include conversions to make more of your old favourites work on the Master.*

Cavalry to the rescue

*It's Repton corner again. Simon Woods of High Wycombe has written in to say that he is stuck on screen C of ORIENT in **Around the World in 40 Screens**.*

There is probably a good reason for this: The first release of the game has a bug on this very screen. Amazingly, the bug is so small as to be only one bit of a single byte in the whole Orient, file – but the screens are designed so fiendishly that this screen is now impossible to complete.

But never fear, the Yorkshire cavalry is coming to the rescue. Simply send the game back to Superior for a free replacement. Alternatively, try the Hac-Man method:

```
*LOAD ORIENT
?&3736=&B6
```

and then, to a blank tape or disc:

```
*SAVE ORIENT2 31E0 +2620.
```

Load this new file with option L – calling it, of course, ORIENT2 – into either the game or the editor, to find that a safe has appeared where there was previously only a blank wall. Voila!

*Simon has also spotted a couple of errors in the **Repton 3** pokes given in the July column. The first poke, ?&FED=0, should read ?&2FED=0 and the one for infinite lives should read:*

```
?&311C=&A9: ?&311D=1
```

*He also points out an omission in the same section which is entirely my fault. First type *DIR D, before:*

```
PAGE=&900:LOAD'REPTON1'
```


Then enter the following line:

```
5 MODE 5
```

before the pokes at line 115. This procedure was correctly shown in the tip to display maps F-H, published in the June issue of The Micro User.

The Perfect Partners.

VIGLEN DISK DRIVES



Simply plug a Viglen disk drive into your BBC B (fitted with DFS), B+, or Master micro and immediately benefit from 400 or 800 KB of extra data storage capacity.


| Stock Code | Description | Price inc. VAT | |
|------------|-----------------------------|----------------|--------------------------|
| VPD 0241 | 400K Single Drive, No PSU | £119.95 | NOW WITH 3-YEAR WARRANTY |
| VPD 0246 | 400K Single Drive, + PSU | £134.95 | |
| VPD 0243 | 800K Dual Drive, No PSU | £222.95 | |
| VPD 0248 | 800K Dual Drive, + PSU | £249.95 | |
| VPD 0249 | 800K Bridge Unit + PSU | £264.95 | |
| VPD 0250 | 5.25" + 3.5" Combined + PSU | £249.95 | |
| SPO 14 | Single 400K 40/80T Drive | £ 99.95* | SPECIAL OFFER |
| SPO 19 | Dual 800K 40/80T Drive | £189.95* | |

* These two models are offered with 12 months warranty
Please add £8.00 for insured courier delivery

PANASONIC PRINTER KIT

The Panasonic KX-P1081 comes complete with £45.00 worth of accessories FREE including tractor feed and roll feed units with paper, printer cable, and a specially designed metal printer stand. Features include:

- * 120 cps draft printing, 24 cps NLO
- * IBM and Epson compatibility through dip switch settings
- * Prints 80 columns on A4 cut sheets, continuous stationery or roll paper
- * 9x9 draft and 18x23 NLO

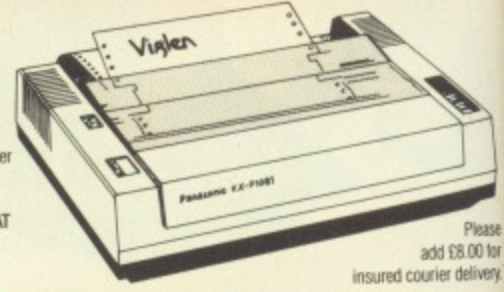

| Stock Code | Description | Price inc. VAT |
|------------|-------------------------------------|----------------|
| SPO 79 | Panasonic KX-P1081 plus accessories | £189.95 |

Please add £8.00 for insured courier delivery.

PROFESSIONAL CONSOLE UNIT


Give your BBC or Master micro a professional PC-look by replacing the existing lid with this smartly styled package which can house two disk drives. Complete with separate keyboard case and connecting cables. A full range of accessories is also available.



| Stock Code | Description | Price inc. VAT |
|------------|--|----------------|
| V0851 | Viglen Professional Console Unit for the BBC micro | £49.95 |
| V0861 | Viglen Master Console Unit for the Master micro | £59.95 |

Please add £8.00 for insured courier delivery.



VIGLEN WINCHESTER DISKS

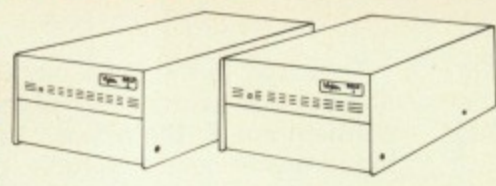

Plug-in 20 to 112MB of extra storage with the Viglen Winchester system. Please add £8.00 for insured courier delivery.

| Stock Code | Description | Price inc. VAT |
|----------------------|-------------------------------|----------------|
| Drive 0 Single | | |
| V0150 | VB20 20MB Viglen Winchester | £ 649.00 |
| V0152 | VB28 28MB Viglen Winchester | £ 699.00 |
| V0155 | VB40 40MB Viglen Winchester | £1045.00 |
| V0156 | VB56 56MB Viglen Winchester | £1119.00 |
| Drive 1 Second Drive | | |
| V0160 | VB120 20MB Drive 1 Winchester | £ 549.00 |
| V0162 | VB128 28MB Drive 1 Winchester | £ 599.00 |
| V0165 | VB140 40MB Drive 1 Winchester | £ 819.00 |
| V0167 | VB156 56MB Drive 1 Winchester | £ 899.00 |
| V0157 | 20MB Tape Streamer Backup | £ 724.95 |

PRINTER STANDS




| | Price inc. VAT |
|--|----------------|
| Viglen's printer stands are available in clear perspex, 80 col. | £19.95 |
| 136 col. | £29.95 |
| high-impact ABS plastic colour-matched to most printers, 80 col. | £14.95 |
| black metal finish | £ 9.95 |

Viglen's printer stands cater for 80 and 136 column printers and allow continuous stationery to be stored underneath. Please add £3.00 postage and packaging.

ROM CARTRIDGE SYSTEM

Designed by Viglen for use with the BBC B or Master micros, the Rom Cartridge System allows a range of Rom software to be used and interchanged easily without fear of damage to the delicate pins. The system is simple to fit and requires no soldering.




| Stock Code | Description | Price inc. VAT |
|------------|---|----------------|
| V0560 | Viglen Rom Cartridge System for BBC | £12.95 |
| V0559 | Viglen Rom Cartridge System for BBC (low profile) | £12.95 |
| V0550 | Viglen Rom Cartridge System for Master | £14.95 |
| V0561 | Single Viglen Cartridge | £ 3.99 |

Please add £2.50 for postage and packing (£00.50 for single cartridge).

DAISYWHEEL PRINTER

The Panasonic KX-P3131 daisywheel printer is Diablo-compatible and utilises bi-directional logic seeking techniques to produce letter quality print at a rate of 17 characters per second (cps). Friction speed provides really efficient paper handling, whilst tractors are available as an option.

| Stock Code | Description | Price inc. VAT |
|------------|---------------------------------------|----------------|
| V0400 | Panasonic KX-P3131 Daisywheel Printer | £299.95 |

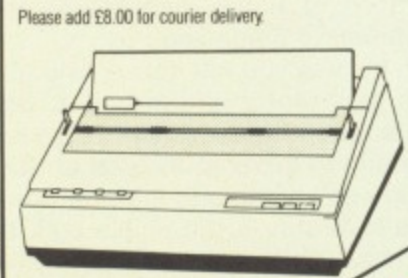

Please add £8.00 for courier delivery.

SALES HOTLINE 01 843 9903

HOW TO ORDER

Simply fill in the coupon or write to us with your requirements enclosing a cheque/postal order or your credit card no. for the total amount. Don't forget to add the cost of delivery. Allow 7 to 10 days for delivery. Credit card holders may order by telephone on our sales hotline 01-843 9903 (8 lines). Orders from overseas should be exclusive of VAT (Please deduct 15% from the total cost). Prices correct at time of going to press and offers are subject to availability. Dealer, Trade & Education Enquiries Welcome.



Viglen Ltd., Unit 7, Trumpers Way, Hanwell, London. W7 2QA
Telephone: 01-843 9903
Telex: 919 304 VIGLEN G
Fax: 01-574 5126

Send NOW for our special offers booklet

Fill in and post to Viglen Ltd., Unit 7, Trumpers Way, London W7 2QA. Tel. No. 01-843 9903. Please make cheques and postal orders payable to Viglen Ltd.

| STOCK CODE | DESCRIPTION | QUANTITY | TOTAL PRICE |
|------------|-------------|----------|-------------|
| | | | |
| | | | |

Please find enclosed a cheque/postal order I prefer to pay by VISA ACCESS Tick one please. Carriage _____
 Card No. _____ Signature _____ Expiry date _____ Total _____
 Name _____ Address _____
 Postcode _____ Tel. no. _____

Logon – and make a friend

IN previous beginners' communications articles we've looked at the theory behind several areas of using a modem. Now we take another look at the fun side of computer communications. The MicroLink bulletin board is an exciting way to make new friends in the global village.

Many computer books will regale you with tales of how wonderful (and cheap) bulletin boards are and how, for the price of a local telephone call, you can send and receive electronic messages to and from dozens of like-minded computer communications enthusiasts.

The reality of bulletin boards – or BBSs as they are known in the trade – is somewhat less rosy. Because of their nature, BBSs are run on a single telephone line and, at peak periods, there can be several dozen callers all trying to log onto the board via this line.

Needless to say, the majority of BBS callers are disappointed and must either redial until their dialling finger turns red or try one of a range of other BBSs, many of which will be a long distance away.

But what if a bulletin board were available on local call access, with enough lines to cope with even the heaviest call load? Multiple-line BBSs are widely available in the US, where the concept of BBSs originated in the late 1970's, but the majority are subscription only and many users are frustrated by the slowness of the boards, owing to the time-sharing that takes place on a single computer BBS.

In the UK, MicroLink, a powerful subset of the Telecom Gold electronic mail system, has a bulletin board which runs quite happily on its mainframe.

Steve Gold takes a look at the MicroLink bulletin board

MicroLink's computers are large and powerful. So large, in fact, that several dozen users can access the computer without any appreciable loss in speed.

The MicroLink bulletin board is just one of the many varied options available on the MicroLink system, the scope of which we'll be looking at in later articles. But on with the bulletin board.

The MicroLink bulletin board isn't a real bulletin board in the sense that BBSs operate. In reality, it's a complex and easy-to-use program that runs on the MicroLink mainframe.

Having said this, once accessed the system behaves – to all intents and purposes – as a real BBS would, except it has the value-added option of leaving you copies of all your messages to other users in your mailbox, as well as responding far quicker than any disc-based BBS would.

Unlike many BBSs today, the MicroLink network is accessible at all modem speeds between 300 and 1200 baud full duplex. Indeed, at the time of writing there is talk of a 2400 baud local call access to MicroLink over much of the UK. Add to that the large number of lines available to MicroLink, and it's not difficult to see why the MicroLink bulletin board has grown to be Britain's biggest – and most popular – BBS today.

The higher access speeds mean that messages can quickly be retrieved and spooled to disc for later reading offline. You can then return online to upload or type replies. Using such high speeds of access means that regular sessions on the MicroLink bulletin board can be accomplished in a matter of minutes – all helping to keep the telephone bill

down to respectable levels.

But enough of talking about the system, let's log on. Figure I shows you the initial menu on the bulletin board.

The first option will take you straight into the bulletin board system – more of which in a moment – but the second is perhaps the most useful for regular users of the bulletin board itself.

Without actually running the bulletin board program, the second option allows you to quickly peek in and check for bulletin board activity. Figure II shows what happens when you select this option.

The third allows you to peruse the online manual, a sample of which is shown in Figure III. MicroLink recommend that you download it for printing and perusal offline. For the more impatient, this well-written manual quickly familiarises you with the bulletin board commands used on MicroLink.

Many users never need to refer to the manual, such is the ease with which the bulletin board is laid out. If you've ever used a BBS before, then it's unlikely you'll need to refer to it.

The fifth and sixth options are also there to give help and give a short "get you going" list of commands that will smooth and simplify your progress through the MicroLink bulletin board.

Just like when you first installed your computer – remember that? – the MicroLink system needs to know the size of your screen – number of lines and column width. Entering such information is done using the fourth option and isn't strictly necessary, but, like computer installation procedures, it makes life easier for the future.

Like the single line BBSs, the MicroLink bulletin board allows you to select one or more of the many categories available and either scan through (forwards and backwards) as shown in Figure IV and/or read the messages themselves as in Figure V.

Scanning the messages is quick and easy and can often pin-point the message that you're looking for in seconds. Just like the smaller BBSs, however, the real fun starts when you begin to read through the messages themselves.

Thanks to the power of the MicroLink computer, it's possible to individually select the categories of messages that you want to scan. In this way you can skip those messages which are not of general interest to yourself. Be warned

Turn to Page 57 ►

```

*****
Bulletin Board System
*****

1 : Access Bulletin Board
2 : Check for new messages
3 : Manual
4 : Setup Terminal
5 : Useful external BB Commands
6 : Hints on using BB

1-6 R(edisplay) Q(uit) :
    
```

Figure I: The MicroLink bulletin board menu

```

New Messages since last access: 5

In Categories:

CHATTER:      1  CONTACTS:      2  BUSINESS ADS:      1  FOR SALE:      1
    
```

Figure II: Checking for new messages



MICROMAN Computers

PASTURE LANE FARM,
PASTURE LANE, RAINFORD,
ST. HELENS, MERSEYSIDE, WA11 8PU

PHONE 074488 3667

SHOWROOM

SHOWROOM OPENING
9-6 MONDAY TO FRIDAY
9-1 SATURDAY



MAIL ORDER

PHONE 074488 5242

We accept both Access and Visa credit cards. Simply telephone your order, giving card number, expiry date, name and address, or send your order with cheque or postal order to the address opposite.

**DELIVERY CHARGES
INCLUDING VAT**

Computers/Printers/Drives:
Next day £8.00, Trackback £4.00
Small Items: £1.00



ACORN DEALER : ECONET : SERVICE CENTRE

Archimedes

| ARCHIMEDES 300 SERIES: | Ex VAT | Inc VAT |
|---------------------------|---------|---------|
| Archimedes 305 Base | 799.00 | 918.85 |
| Archimedes 305 Monochrome | 849.00 | 976.35 |
| Archimedes 305 Colour | 999.00 | 1148.85 |
| Archimedes 310 Base | 875.00 | 1006.25 |
| Archimedes 310 Monochrome | 925.00 | 1063.75 |
| Archimedes 310 Colour | 1075.00 | 1236.25 |

Phone for prices and details of Archimedes 400 Series.

| BBC MASTER SERIES: | Ex VAT | Inc VAT |
|---------------------|--------|---------|
| Master 128 | 379.00 | 435.85 |
| Master Turbo Module | 108.70 | 125.00 |

MASTER 512 UPGRADE SPECIAL OFFER

£199.00

Price includes VAT.

This offer includes: FREE MICROMAN 512 DISC
UTILITIES SOFTWARE WORTH £12.95.

| MASTER 512 SOFTWARE: | Ex VAT | Inc VAT |
|------------------------------|--------|---------|
| Microman 512 Disc Utilities | 11.26 | 12.95 |
| Words & Figures | 99.00 | 113.85 |
| Ability (Integrated Package) | 99.00 | 113.85 |
| VP Info | 86.09 | 99.00 |
| Volkswriter | 39.09 | 44.95 |

| BBC MASTER COMPACT SERIES: | Ex VAT | Inc VAT |
|---------------------------------|--------|---------|
| Master Compact | 349.00 | 401.35 |
| Master Compact + TV Modulator | 363.00 | 417.45 |
| Master Compact + Green Monitor | 399.00 | 458.85 |
| Master Compact + Colour Monitor | 549.00 | 631.35 |
| RS232 Kit | 26.00 | 29.90 |
| Additional Floppy Disc Drive | 99.00 | 113.85 |
| Pal TV Adaptor | 26.00 | 29.90 |

| ECONET NETWORKS: | Ex VAT | Inc VAT |
|-------------------------------|--------|---------|
| Master Econet Terminal | 329.00 | 378.35 |
| Achmedes/Master Econet Module | 43.47 | 49.99 |
| Filestore E01 | 828.00 | 952.20 |
| Filestore E20 | 721.00 | 829.15 |

OPUS DISC DRIVES

Opus 5802 400K 40/80T

£109.95

Opus 5802DB 800K 40/80T

£209.95

Opus 5802D 800K 40/80T

+ Power Supply

£239.95

Prices include VAT.

| BBC MONITORS: | Ex VAT | Inc VAT |
|------------------------------------|--------|---------|
| Microvitec 1431 Std/Metal | 199.13 | 229.00 |
| Microvitec 1451 Med/Metal | 240.00 | 276.00 |
| Philips CM8833 Med/RGB/CV | 250.00 | 287.50 |
| Philips TV Tuner (Composite Video) | 69.52 | 79.95 |
| Philips Green 7502 | 73.91 | 85.00 |
| Philips Amber 7522 | 77.39 | 89.00 |
| Philips White 7542 | 77.39 | 89.00 |

| BBC DISC INTERFACES/ UPGRADES: | Ex VAT | Inc VAT |
|-----------------------------------|--------|---------|
| Acorn 1770 Disc Interface | 43.44 | 49.95 |
| Acorn ADFS ROM | 26.08 | 29.99 |
| Watford 8271 Disc Interface | 60.00 | 69.00 |

| BBC B CO-PROCESSOR ADAPTERS: | Ex VAT | Inc VAT |
|---------------------------------|--------|---------|
| Acorn Co-Pro Adapter | 75.00 | 86.25 |
| Watford Co-Pro Adapter | 50.00 | 57.50 |

| | Ex VAT | Inc VAT |
|--|--------|---------|
| BBC B ROM BOARDS: | | |
| Watford Solderless ROM Board | 32.00 | 36.80 |
| Watford Battery Backup | 3.00 | 3.45 |
| Aries B12 Sideways ROM Board | 40.00 | 46.00 |
| Aries B12c Adapter | 5.00 | 5.75 |
| ATPL Sideways ROM Board | 38.00 | 43.70 |
| BBC B SIDEWAYS ROM/RAM EXPANSION: | | |
| Watford 16K Sideways RAM Module | 29.00 | 33.35 |
| Watford ROM/RAM Card + 32K DRAM | 39.00 | 44.85 |
| Watford ROM/RAM Card 64K DRAM | 52.00 | 59.80 |
| Watford ROM/RAM Card + 128K DRAM | 80.00 | 92.00 |
| Watford Sideways ZIF Socket | 15.00 | 17.25 |
| BBC B SHADOW BOARDS: | | |
| Watford 32K Shadow RAM Board | 59.00 | 67.85 |
| Aries B32 RAM Extension Board | 80.00 | 92.00 |
| BBC EPROM PROGRAMMERS/ ERASERS | | |
| Control Telemetry EPROM Prog | 95.00 | 109.25 |
| Uviprogram EPROM Prog | 18.22 | 20.95 |
| Uviprogram EPROM Prog + ZIF | 22.57 | 25.95 |
| Multiprogrammer | 39.09 | 44.95 |
| Uviprogram & Multiprogrammer require either SWR or ROM software listed below. | | |
| Uviprogram ROM Software | 4.35 | 5.00 |
| Uviprogram SWR Disc Software | 1.74 | 2.00 |
| Watford EPROM Eraser GT | 30.00 | 34.50 |
| Uviprogram EPROM Eraser | 18.22 | 20.95 |
| Uviprogram EPROM Eraser + Timer | 22.57 | 25.95 |
| EPROMS/RAM CHIPS: | | |
| Eproms 2764 8K | | P.O.A |
| Eproms 27128 16K | | P.O.A |
| Eproms 27256 (12.5v) | 5.00 | 5.75 |
| Eproms 27512 | 9.00 | 10.35 |
| RAM 6264LP-15 8K | 3.00 | 3.45 |
| BBC MODEMS: | | |
| Pace Linnet + Commstar II | 139.00 | 159.85 |
| Pace Nightingale + Commstar II | 86.09 | 99.00 |
| Watford Apollo Modem | 75.00 | 86.25 |
| BBC SPECIAL KEYBOARDS: | | |
| Concept Keyboard A4 | 109.50 | 125.93 |
| Concept Keyboard A3 | 139.50 | 160.43 |
| BBC DIGITISERS: | | |
| Graphpad II (BBC) | 65.65 | 75.50 |
| BBC VIDEO DIGITISERS: | | |
| Watford BEEB Video Digitiser | 109.00 | 125.35 |
| Watford Magazine Maker | 129.00 | 148.35 |
| BBC MOUSE/TRACKERBALL PRODUCTS: | | |
| Watford Quest Mouse | 35.00 | 40.25 |
| Watford Quest Mouse + Paint | 59.00 | 67.85 |
| AMX Mouse + Super Art (Mk III) | 69.52 | 79.95 |
| AMX Mouse Mat | 5.00 | 5.75 |
| AMX Pagemaker | 43.44 | 49.95 |
| AMX Extra Extra (Pagemaker) | 21.70 | 24.95 |
| AMX Super Art ROM: BBC B | 43.44 | 49.95 |
| AMX Super Art: Master | 43.44 | 49.95 |
| AMX MAX | 17.35 | 19.95 |
| Fleet Street Editor | 34.74 | 39.95 |
| Fleet Street Editor Fonts/Graphics | 13.00 | 14.95 |
| Fleet Street Editor Admin Xtra | 13.00 | 14.95 |
| Fleet Street Editor Disney | 13.00 | 14.95 |
| Trackerball RB2 + ICON Soft | 59.00 | 67.85 |
| Trackerball + Pointer (Master) | 59.00 | 67.85 |
| BBC MASTER CONSOLE UNITS: | | |
| Viglen Console | 43.44 | 49.95 |
| Viglen Master Console | 52.13 | 59.95 |
| BBC CAD SYSTEMS: | | |
| Bitstik 2 (Master Compatible) | 694.78 | 799.00 |
| Bitstik 2 Upgrade | 400.00 | 460.00 |
| Pineapple Diagram | 25.00 | 28.75 |
| Pineapple Diagram Utilities | 10.00 | 11.50 |
| Pineapple Diagram II | 55.00 | 63.25 |
| Pineapple PCB Designer | 85.00 | 97.75 |
| AMX Design | 60.83 | 69.95 |

| | Ex VAT | Inc VAT |
|--------------------------------|--------|---------|
| Microman Plotter ROM | 26.04 | 29.95 |
| PRINTERS: | | |
| Star NL10 + BBC/Cent Interface | 209.00 | 240.35 |
| Star NX15 Wide Carriage | 339.00 | 389.85 |

PANASONIC KXP1081

Printer + Free BBC Lead

£179.00

Price includes VAT.

| | | |
|------------------------------------|--------|---------|
| Epson LX800 | 239.00 | 274.85 |
| NEC Pinwriter P660 (80) Parallel | 449.00 | 516.35 |
| NEC Pinwriter CP660 (80) Parallel | 519.00 | 596.85 |
| NEC Pinwriter P760 (136) Parallel | 529.00 | 608.35 |
| NEC Pinwriter CP760 (136) Parallel | 619.00 | 711.85 |
| Juki 6100 Daisywheel | 299.00 | 343.85 |
| Panasonic Serial Interface | 41.00 | 47.15 |
| Star NL10 Sheet Feeder | 55.00 | 63.25 |
| Star NX15 Sheet Feeder | 140.00 | 161.00 |
| LX800 Sheet Feeder | | TBA |
| Print Sharer 2 Way Switch | 39.00 | 44.85 |
| PLOTTERS: | | |
| Roland DXY880A A3 Plotter | 694.78 | 799.00 |
| Roland DXY980A A3 Plotter | 999.00 | 1148.85 |

We are a Roland Main Dealer and stock the complete range of plotter, pens and paper.

| BBC WORDPROCESSING SOFTWARE: | Ex VAT | Inc VAT |
|---|--------|---------|
| View Professional | 86.91 | 99.95 |
| Interword ROM | 42.61 | 49.00 |
| Wordswise Plus ROM | 42.61 | 49.00 |
| View 3.0 ROM | 45.22 | 52.00 |
| Spellmaster | 51.31 | 59.00 |
| Viewspell | 34.74 | 39.95 |
| View Index | 13.00 | 14.95 |
| View Printer Driver Generator | 10.00 | 11.50 |
| BBC DATABASE & SPREADSHEET SOFTWARE: | | |
| Master Overview | 86.00 | 98.90 |
| Interbase ROM | 60.00 | 69.00 |
| Viewstore ROM | 45.22 | 52.00 |
| Intersheet ROM | 43.44 | 49.95 |
| Interchart ROM | 29.52 | 33.95 |
| Viewsheet ROM | 45.22 | 52.00 |
| Viewplot Disc | 26.04 | 29.95 |
| BBC LANGUAGES: | | |
| Master C | 78.00 | 89.70 |
| BCPL ROM | 52.00 | 59.80 |
| BCPL Calculations | 30.00 | 34.50 |
| BPCL Stand Alone Generator | 43.39 | 49.90 |
| ISO Pascal ROM | 52.13 | 59.95 |
| ISO Pascal Stand Alone Gen | 30.00 | 34.50 |
| Comal ROM | 43.35 | 49.85 |
| Acorn LOGO ROM | 60.00 | 69.00 |
| Logoton LOGO ROM | 60.00 | 69.00 |
| Micro-Prolog ROM | 69.52 | 79.95 |
| Microtext | 52.00 | 59.80 |
| BBC UTILITIES: | | |
| Master Termulator | 34.74 | 39.95 |
| System ADE + BBC Version | 46.00 | 52.90 |
| System ADE + Master Version | 49.00 | 56.35 |
| Advanced Disc Investigator | 25.00 | 28.75 |
| Advanced Disc Toolkit | 30.00 | 34.50 |
| Vine Replay ROM's | 30.44 | 35.00 |
| Vine Master Replay | 36.48 | 41.95 |

We stock a large range of utility software by ACORN, CLARES, COMPUTER CONCEPTS, WATFORD etc.

PC COMPUTERS & SOFTWARE:

We stock the OPUS PCII & AMSTRAD PC1512 range of PC Computers along with a large selection of add-ons and books. Full Price List available.

GOVERNMENT, NHS AND EDUCATIONAL ORDERS ACCEPTED



though – most users find that all of the categories hold an interest for them.

Unlike the smaller BBSs, MicroLink is a clean bulletin board. Thanks to powerful programs that work in the background, unsuitable messages – and I'm sure readers will know what I mean here – are quickly pinpointed and withdrawn, so as not to cause offence to other bulletin board users.

Thanks to this useful system, MicroLink members of all ages can read and use the bulletin board system without any worry of being offended. Having said this, many bulletin board regulars like to talk about controversial topics – but well within the bounds of public decency.

The same cannot be said of other BBSs, many of which contain text which – to put it mildly – is unsuitable for the majority of the public to read. The MicroLink bulletin board is a fun place to be, and it's a pleasant place for the family to enjoy with you.

Many modem users ask why use a bulletin board at all? In today's society we are all conditioned to stay within our own areas – with the result that the opportunities to make new friends are often limited.

Sometimes, the people we meet on trains and aeroplanes are less than desirable and wholly unsuitable to make friends with. That, sadly, is a fact of modern living.

What bulletin boards of all types allow people to do is to make new contacts – and forge firm friendships – with people they have never seen. Because MicroLink is a giant club of like-minded people. The bulletin board allows an interchange of messages and ideas on a scale never before seen in the UK.

A single BBS can – at best – hope to have just a few dozen regular users, many of whom jostle and compete for

```

* THE BULLETIN BOARD SYSTEM (BBS) *
-----
The Bulletin Board System provides
you with an 'open' area where you
can reach everyone on the system.
The BBS allows you to place messages,
read and scan items from categories
that may interest you, reply to
messages and to delete messages you've
placed on the board, once they become
outdated. With the BBS's link to MAIL,
you can even send copies of messages
you SEND or READ on the Bulletin Board
to other users on the System.

GENERAL OPTIONS - from any prompt.
-----
H)elp.....Get help message
?.....Get current options
Q)uit.....Exit to COMMAND LEVEL
S)top.....Return to BBS menu
    
```

Figure III: An excerpt from the manual

```
BB> SC
```

```
F)wd, B)ack, N)ew or H)elp:B
```

```

7393 WHELDON.&.WESLEY (MAG9 *CONTACTS* 13900% PROFIT!?!
7392 E.B.S.LTD (MAG95634) *CHATTER* Rply: 7378: COMMENTS PLEASE .....
7391 GOLDEN.EAGLE.FILMS (MAG *AMSTRAD* AMX PAGEMAKER
7390 WALLER.R.F (MA *OTHER HOME COMPS* APRICOT F1 SOFTWARE
7389 WALLER.R.F (MAG95412) *WANTED* F1
7388 MAG35040 *IBM PC ETC* Rply: 7377: WORDSTAR 1512
7387 DURHAM.E.N (MAG200 *BUSINESS ADS* DTP TYPESETTING PRINT & DESIGN
7386 MAG35171 *CONTACTS* MICROLINK BULLETIN BOARD
7385 MAG40463 *ADVENTURE* Rply: 7220: PAWN
7384 MAG043 *COMMUNICATIONS* Rply: 7373: FASTCOM
7383 MAG90536 *COMMUNICATIONS* Rply: 7368: MY ENGLISH (TSK. TSK.)
7382 STROUD.L (MAG90074) *WANTED* UPS SYSTEM
7381 M.P.S (MAG70142) *CHATTER* Rply: 7320: FOOTBALL
7380 MAG003 *IBM PC ETC* Rply: 7377: WORDSTAR 1512
7379 MAG003 *CHATTER* Rply: 7359: AUTO DROP OUT?
7378 DESIGN.KITCHENS (MAG953 *CHATTER* COMMENTS PLEASE .....
    
```

Figure IV: Scanning the bulletin board messages

online time. The MicroLink bulletin board, on the other hand, is available at local call rates (from most of the UK) and is available on a 24 hour a day basis to all comers. It doesn't matter that the MicroLink bulletin board is accessible to several thousand people – there's always a line there for you to logon to, no matter what time of the day or night it is.

Like the majority of MicroLink's varied

selection of services, the bulletin board costs nothing extra to use beyond the normal MicroLink charges.

Most users find that accessing the MicroLink bulletin board is cheaper and more productive than repeatedly dialling a single-line BBS that may be several hundred miles distant.

MicroLink's mainframe computers are actually based in London – but for many readers, are accessible at local rates.

```

S)end R)ead SC)an C)ategories Q)uit H)elp
BB>R

Msg#: 7396 *BBC/ELECTRON* (Read 3 times, 0 replies)
From: CLARKE.S.L (MAG11125) Posted: Wed 26-Aug-87 22:04 BST Sys 72
Subject: ROM/RAM BOARDS

Anyone with a BBC B with a Rom/Ram board fitted and can give me info on them please?
IE:- What can be done - Shadow or sideways Ram - Cost and fitting etc.

Any help would be appreciated

Thanks, Nobby

R)eply, N)ext, S)top, or Msg #:N

Msg#: 7401 *FOR SALE* (Read 2 times, 0 replies)
From: MAG80046 Posted: Wed 26-Aug-87 23:41 BST Sys 72
Subject: HARDWARE PROJECTS FOR BBC

Includes building keypad ,software, key etc.... £2.20

Andrew Moran, Barholm, Shinfield Green, Reading, Berks., RG2 9BE.

R)eply, N)ext, S)top, or Msg #: n

End of selected messages.
    
```

Figure V: A sample selection of messages

Compiled by Steve Turnbull

Once again we have a good variety of programs: The Environment routines will be of great use to anyone writing software for use on many different systems. Double Height and Text Scroller show the basis for text manipulation on screen – although someone must have a smoother version of the scroller.

We have an improved version of the Wordwise Plus Date Stamper, and a routine which finds which day of the week a given date is. I'm sure this routine does not use the standard algorithm – although it works well – and the method of date entry is awkward. Can we have an all-purpose date decoding routine?

Send your routines – with full details of the language it is written in and the hardware/software requirements – on disc or tape to:

Steve Turnbull, Library, The Micro User, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Remember to enclose a stamped addressed envelope for the return of your media. Five blank discs will be sent to the authors of any routines published.

Name: Double Height
Language: Basic
Author: Matthew Waters

Printing double height text is easy in Mode 7 using Teletext, but in other modes it's harder.

The routine, PROCdb, given here takes as arguments the string to print plus the screen text coordinates to start the print. It will work correctly in any mode, but modes 3 and 6 have gaps between the lines which spoils the effect.

However using the small screen facility in the August issue of *The*

Micro User you can even get rid of the gaps.

It works by redefining character 254 to be the top half of the character to be doubled and character 255 to be the lower half then it displays them one below the other.

One refinement is the addition of $-10*(POS=0)$ in line 140. This forces a second line to be scrolled at the end of the current line in addition to the normal carriage return.

```

10 REM * Double Height *
20 ON ERROR MODE7:REPORT:PRINT" at li
ne ";ERL:END
30 MODE1:REPEAT CLS
40 INPUT"Please enter a string:"s$
50 PROCdb(s$,0,10):REPEATUNTILGET
60 UNTIL s$="end":MODE7:END
70 DEF PROCdb(s$,XX,YY)
80 IF s$="" ENDPROC
90 VDU31,XX,YY:LOCAL AX,LX:XX=870
100 YX=0:FOR LX=1 TO LEN s$:AX=10
110 XX?0=ASCIDS(s$,LX):CALL&FFF1
120 VDU23,254,XX?1,XX?1,XX?2,XX?2,XX?3
,XX?3,XX?4,XX?4
130 VDU23,255,XX?5,XX?5,XX?6,XX?6,XX?7
,XX?7,XX?8,XX?8
140 VDU254,8,10,255,11,-10*(POS=0)
150 NEXT:ENDPROC

```

✓ Get it right!

| | | |
|-------------|--------------|--------------|
| 10 = 00 | 60 = BF8 E | 110 = 528A 8 |
| 20 = CE37 7 | 70 = E18 A | 120 = C94C 2 |
| 30 = DE35 C | 80 = 16E3 2 | 130 = 21C9 F |
| 40 = 98CC E | 90 = 6D92 F | 140 = 729D 6 |
| 50 = 7327 6 | 100 = 9ADF A | 150 = E531 9 |

Name: Text Scroller
Language: Basic
Author: Jeremy Pattman

This is a Basic routine for scrolling a text message in a window.

The main routine, PROCscroll, takes the text string to be scrolled plus the line to put the message on as arguments. It draws a box on the screen, defines a graphics window for the text and resets the graphics origin to the bottom left of this window.

The size of the box is either the length of the text string or a maximum of 30 characters.

The scrolling is done offsetting by two extra pixels each time, emphasising the apparency of the text scrolling through the box.

The main problem with the program is that putting text onto the screen using the graphics cursor is very slow so there is a large amount of flicker during the scroll.

```

10 REM Text Scroller
20 ON ERROR MODE7:REPORT:PRINT" at li
ne ";ERL:END
30 MODE 1:YX=20:READ t$
40 PROCscroll(t$,YX):END
50 DEF PROCscroll(t$,YX):LOCAL XX,u$
60 XX=LEN(t$):IF XX>30 XX=30
70 PROCgbox(XX,XX):*FX21
80 REPEAT u$=MIDS(t$,1,31)
90 FOR XX=0 TO -32 STEP -8
100 PROCwrt(u$,XX):PROCwrt(u$,XX)
110 NEXT:t$=MIDS(t$,2)+LEFTS(t$,1)
120 UNTIL INKEY(0)=32:ENDPROC
130 DEF PROCgbox(XX,YY)
140 LOCAL AX,BX,CX,DX,OX,ZX
150 ZX=20-XXDIV2:OX=8:AX=ZX+32
160 BX=AX+XX*32:OX=(32-XX)*32
170 DX=OX+36:MOVEAX-OX,CX-OX
180 DRAWAX-OX,DX+OX:DRAWBX+OX,DX+OX
190 DRAWBX+OX,CX-OX:DRAWAX-OX,CX-OX
200 VDU24,AX,CX;BX;DX;16
210 VDU29,AX,CX:ENDPROC
220 DEF PROCwrt(t$,XX):VDU5
230 GCOL3,1:MOVE XX,32:PRINT t$;
240 VDU4,23,1,0;0;0;0:ENDPROC
250 DATA "This is a test message and I
think you should read it very carefully
"
```

✓ Get it right!

| | | |
|-------------|--------------|--------------|
| 10 = 00 | 100 = CF9C 4 | 190 = 6EAB 0 |
| 20 = BC2B B | 110 = 5107 4 | 200 = A650 A |
| 30 = 70D5 A | 120 = 1593 D | 210 = C3E7 5 |
| 40 = E352 9 | 130 = 1137 D | 220 = EB7C 0 |
| 50 = 7EE8 7 | 140 = 892E 1 | 230 = 1B44 F |
| 60 = 696A 4 | 150 = 92C0 4 | 240 = EE75 9 |
| 70 = AADC B | 160 = 598C C | 250 = E4CE 5 |
| 80 = 3CF2 2 | 170 = A098 4 | |
| 90 = A58C B | 180 = 8C37 C | |

Name: Tab-Copy
Language: 6502
Author: Peter Lloyd

This is a handy little routine which checks the keyboard and if both the Tab and Copy keys are pressed (Tab first) the routine jumps to address &900 where another routine should be waiting - for example a screen dump routine.

The program works by using the frame sync event to enter a short piece of code which examines locations &EC and &ED in memory. These hold the current key pressed and previous (but still pressed) key values respectively. If the values indicate that Tab is pressed and Copy was pressed after it the routine switches the sync event off, enables interrupts and jumps to the routine at &900.

On return from that routine (using an RTS) the sync event is restarted and all registers reset to their normal values. The routine can be moved around as can the *execute* code position to take account of different programs' memory requirements.

The program is unlikely to work with commercial programs as these usually reset the vectors and switch off events.

```

10 REM * TABCOPY *
20 evntv=&0220
30 oldev=&80
40 execute=&900
50 save=&FC
60 FOR opt%=0 TO 2 STEP 2
70 P%=&B00:COPT opt%
80 LDA evntv:CMP #event MOD&100
90 BEQ done:STA oldev
100 LDA evntv+1:STA oldev+1
110 LDA #event MOD&100:STA evntv
120 LDA #event DIV&100:STA evntv+1
130 .done
140 CLI:LDX #4:LDA #&0E:JMP &FFF4
150 .event
160 PHP:PHA:TXA:PHA:TYA:PHA
170 LDA save:PHA
180 LDA &ED:BEQ exit
190 CMP #&E0:BNE exit
200 LDA &EC:BEQ exit
210 CMP #&E9:BNE exit
220 LDX #4:LDA #&0D:JSR &FFF4
230 JSR execute
240 LDX #4:LDA #&0E:JSR &FFF4
250 .exit PLA:STA save
260 PLA:TAY:PLA:TAX:PLA:PLP
270 JMP (oldev):J:NEXT
280 $&700=*SAVE TC FFFF0B00+58*
290 XX=0:YX=&7:CALL&FFF7:END

```



| | | |
|--------------|--------------|--------------|
| 10 = 00 | 110 = 224B A | 210 = 709A B |
| 20 = AC9E E | 120 = 4481 9 | 220 = F19 F |
| 30 = D9DE 4 | 130 = F743 3 | 230 = 1103 F |
| 40 = CE6 3 | 140 = AC69 9 | 240 = D750 9 |
| 50 = 7F30 4 | 150 = 8C61 0 | 250 = CAE6 4 |
| 60 = 5221 F | 160 = A5E9 6 | 260 = 9ADF E |
| 70 = 46D7 6 | 170 = 23F5 2 | 270 = C2FB 3 |
| 80 = 360F 2 | 180 = 46A0 C | 280 = 5512 0 |
| 90 = C81D 7 | 190 = 5594 4 | 290 = 4FF2 C |
| 100 = B9B4 E | 200 = 5A5A 0 | |

Name: Day Find
Language: Basic
Author: Malcolm Girling

This program determines the day of the week from the date given. The heart of the program is FNjulian which takes the day/month/year as arguments and calculates the number of days that have passed since the 1st January 1753.

Each input is validated to be in range and the number of days in the month is calculated from the difference between the number of days

to the first of the specified month and the number of days to the first of the succeeding month, thereby avoiding the need for a table of days in the month.

Since January 1st 1753 was a Monday it is quite simple to calculate the day of the week from the total days passed using the MOD7 operation indexing into the table of days in line 130.

```

10 REM * Day Find *
20 MODE 7:DIM wk$(6):@%=0
30 FOR W%=0 TO 6:READ wk$(W%):NEXT W%
40 REPEAT REPEAT
50 INPUT "Year (from 1753) ",Y%
60 UNTIL Y%>1752:REPEAT
70 INPUT "Month (1-12) ",M%
80 UNTIL M%>0 AND M%<13
90 days=FNjulian(1,M%,Y%)-FNjulian(1,M%,Y%)
100 REPEAT
110 PRINT "Day (1-"days")";
120 INPUT DX:UNTIL DX>0 AND DX<=days
130 PRINT "DXSPC1MXSPC1YX" is a "wk$(FNjulian(DX,M%,Y%)MOD7)
140 UNTIL FALSE
150 DATA Sunday,Monday,Tuesday,Wednesday,Thursday,Friday,Saturday
160 DEF FNjulian(DX,M%,Y%)=INT(30.57*M%

```

```

)+INT(365.25*Y%-395.25)+(Y%-1)DIV400-(Y%-1)DIV100+DX+(M%>2)+(M%>2 AND NOT FNLeap(Y%))
170 DEF FNLeap(Y%)=((Y%MOD400)=0)OR((Y%MOD100)<>0)AND((Y%MOD4)=0)

```



| | | |
|-------------|--------------|--------------|
| 10 = 00 | 70 = 7DB7 5 | 130 = 64E9 9 |
| 20 = 4FCE E | 80 = 32BE 8 | 140 = 226C D |
| 30 = CB54 E | 90 = 8585 6 | 150 = F933 8 |
| 40 = B1FE 8 | 100 = BFBA 1 | 160 = E69C F |
| 50 = 3797 F | 110 = CD95 0 | 170 = 7D74 6 |
| 60 = D906 D | 120 = 7449 0 | |

Name: Program Environment
Language: Basic
Author: Neil McLennon

Large programs often need to alter their configuration depending on the computer they happen to be running on.

For example, a program running on a B+ might want to make use of shadow memory, or check whether the cassette or disc system is currently in use.

The three routines below allow a

program to check which computer it is running on, the version of Basic in use and the current filing system.

The routines use standard operating system calls and should work correctly on any system. Although returning a string each routine also sets a global variable to the number of the appropriate version for use elsewhere in the program.

```

10 REM * Environment *
20 computer$=FNcomputer
30 basicnum$=FNbasic
40 filingsys$=FNfsys
50 PRINT "Machine = "computer$
60 PRINT "Basic = "basicnum$
70 PRINT "Filing = "filingsys$
80 END
90 DEF FNfsys:LOCAL AX,Y%,SX
100 SX=USR(&FFDA)AND&F:fsys%=SX
110 IF SX=0 ="None"
120 IF SX=1 ="Tape 1200"
130 IF SX=2 ="Tape 300"
140 IF SX=3 ="Rom"
150 IF SX=4 ="Disc"
160 IF SX=5 ="Network"
170 IF SX=6 ="Teletext"
180 IF SX=7 ="IEEE"
190 IF SX=8 ="Advanced Disc"
200 IF SX=9 ="Advanced Network"
210 ="Unknown"
220 DEF FNbasic:LOCAL AX,XX,Y%
230 XX=&70:XX!=&FFFF8015
240 AX=5:CALL &FFF1:basic%=XX?4-48
250 =STR$(basic%)

```

```

260 DEF FNcomputer
270 LOCAL CX:CX=INKEY(-256)
280 computer%=CX
290 IF CX<1 ="BBC Micro"
300 IF CX=1 ="Electron"
310 IF CX=251 ="BBC B+"
320 IF CX=252 ="BBC Master"
330 IF CX=245 ="Master Compact"
340 ="Unknown"

```



| | | |
|--------------|--------------|--------------|
| 10 = 00 | 130 = A99A 9 | 250 = 93EE 9 |
| 20 = 2B84 4 | 140 = C516 2 | 260 = 2E7F E |
| 30 = D941 D | 150 = A2BB 5 | 270 = 9F0D 3 |
| 40 = 7E67 F | 160 = A6F6 6 | 280 = 63BA 5 |
| 50 = 4A26 5 | 170 = 7DD8 5 | 290 = 64B3 C |
| 60 = 7271 8 | 180 = DBC 5 | 300 = B3E2 0 |
| 70 = 3C96 D | 190 = FA4C 8 | 310 = 40CD E |
| 80 = FD2E 6 | 200 = D4C 5 | 320 = A283 F |
| 90 = CC6F 8 | 210 = F01C 5 | 330 = 248C 2 |
| 100 = B735 C | 220 = A863 3 | 340 = F01C 8 |
| 110 = F4F7 D | 230 = 6C97 C | |
| 120 = FBBA F | 240 = 3B99 5 | |

Name: Date Stamping Re-visited

Language: Wordwise Plus

Author: B.Kemp

Although the routine by Tim Arrowsmith in the August issue of *The Micro User* solves the main problem of reading the Master's clock from Wordwise Plus, the result is not very pleasing. The following segment pro-

gram actually TYPEs the date into the text and does not operate automatically on printing.

The program reads the date, in the same way as the earlier program, into three variables, D\$, M\$ and Y\$, and

then adjusts them to a tidier form before inserting them into the text. The day has *th*, *rd*, *nd* and *st* added to the number, and the month is extended from the three letter abbreviation to the full month name.

```

REM * WW+ Date v2 *
BX=0
AX=14
XX=808
YX=804
CALL &FFF1
DS=""
XX=840C
REPEAT
DS=DS+CHRS?XX
XX=XX+1
UNTIL XX=840E
MS=""
XX=840F

REPEAT
MS=MS+CHRS?XX
XX=XX+1
UNTIL XX=8412
YS=""
XX=8413
REPEAT
YS=YS+CHRS?XX
XX=XX+1
UNTIL XX=8417
.day
DX=VALDS
D$=STRSDX
IF DX=1 THEN GOTO first

IF DX=21 THEN GOTO first
IF DX=31 THEN GOTO first
IF DX=2 THEN GOTO second
IF DX=22 THEN GOTO second
D$=D$+"th"
GOTO month
.first
D$=D$+"st"
GOTO month
.second
D$=D$+"nd"
.month
IF MS="Jan" THEN M$="January"
IF MS="Feb" THEN M$="February"

IF MS="Mar" THEN M$="March"
IF MS="Jun" THEN M$="June"
IF MS="Jul" THEN M$="July"
IF MS="Aug" THEN M$="August"
IF MS="Sep" THEN M$="September"
IF MS="Oct" THEN M$="October"
IF MS="Nov" THEN M$="November"
IF MS="Dec" THEN M$="December"
.final
TYPE D$+" "+M$+" "+Y$
DISPLAY
    
```

Microdis

FREE CABLE AND PAPER DISCOUNT!

SPECIAL OFFERS

| | | |
|---------------------------------------|--------|--------|
| Panasonic KXP1081 (New model) | 152.13 | 174.95 |
| MP 135 80col 135cps/35NLQ (New Model) | 156.48 | 179.95 |
| MP165 160cps/40NLQ | 182.57 | 209.95 |
| MP201 200cps/50NLQ | 324.95 | 373.69 |

| DOT MATRIX PRINTERS | Ex VAT | Inc VAT & Carriage |
|---------------------------------------|--------|--------------------|
| Canon PW1080A | 217.35 | 249.95 |
| Epson LX800 (new model) 150cps/25NLQ | 243.43 | 279.95 |
| Epson LX Tractor Attachment | 18.91 | 21.75 |
| Epson LX Sheet Feeder | 48.65 | 55.95 |
| Epson FX800 (200cps/40NLQ/2 fonts) | 313.00 | 359.95 |
| Epson P40 (Thermal, 80 col) | 52.13 | 59.95 |
| Juki 5510 186 cps/NLQ (colour option) | 234.74 | 269.95 |
| Juki 5510 Colour Upgrade | 97.20 | 111.78 |
| Juki 5520 Colour Printer | 408.65 | 469.95 |

| DAISYWHEEL PRINTERS | Ex VAT | Inc VAT & Carriage |
|-------------------------------|--------|--------------------|
| Juki 6100 132col/20cps | 269.52 | 309.95 |
| Juki 2200 Typewriter/Printer | 217.35 | 249.95 |
| MP 26 Kuma/Diablo 26cps | 217.35 | 249.95 |
| MP 40 Kuma/Diablo 40cps | 296.91 | 329.95 |
| Panasonic KX3131 120col/17cps | 279.95 | 321.95 |

| LASER PRINTERS | Ex VAT | Inc VAT & Carriage |
|----------------|---------|--------------------|
| QMS Kis Laser | 1695.65 | 1950.00 |
| Canon LP88A1 | 1720.00 | 1978.00 |

FREE! FREE! FREE!
WITH EVERY PRINTER -
LISTING PAPER + BBC LEAD
(phone for other leads)

| LISTING PAPER | Ex VAT | Inc VAT & Carriage |
|--|--------|--------------------|
| 80 GSM (Listing) 9.5"x11" 2000 sheets | 15.00 | 17.25 |
| 80 GSM (letter grade) 9.25"x12" 2000 sheets | 17.90 | 20.58 |
| Labels - Box of 8000 (2 abreast on 9.5" backing with central perf.) | 39.00 | 44.86 |
| MONITORS - | | |
| Philips 7502 (Green) | 74.74 | 85.95 |
| Philips 7522 (Amber) | 82.57 | 94.95 |
| Philips 7542 (White) | 82.57 | 94.95 |
| Colour 14" Screen | | |
| Philips 8833 | 273.87 | 314.95 |
| Philips 8873 | 595.95 | 685.34 |

DISCOUNT

Dept. MU487, 46 Middle Street, Blackhall, Hartlepool, Cleveland TS27 4EA. Tel: 091 587 2430

INCREDIBLE DISC DRIVE PRICES

| HIGH QUALITY DISC DRIVES | | |
|---|--------|--------------------|
| Cased with leads, etc READY TO GO | | |
| 5.25" | Ex VAT | Inc VAT & Carriage |
| Acom DFS Disc Interface | 43.33 | 49.95 |
| Opus DDOS Disc Interface | 40.83 | 46.95 |
| BBC SX (Uses BBC's Power Supply) | | |
| SX400S 80 track double side (400K) | 91.76 | 104.95 |
| Dual (uses BBC's power supply) | | |
| DX800S Dual 80 track double side | 178.22 | 204.95 |
| Single With Power Supply | | |
| S400S 80 track double side | 113.00 | 129.95 |
| Dual Drives (with Power Supply) | | |
| D800S 2x80 track double side | 204.30 | 234.95 |
| NOTE - All 80 track drives have a 40/80 switch! | | |

FAST SERVICE
24 HOUR HOTLINE
091 587 2430

NOTE: ALL PRICES INCLUDE VAT + CARRIAGE

| MICROVITEC RGB MONITORS (BBC) | | |
|-------------------------------|--------|--------|
| 1431 (472x585 dots) | 193.00 | 221.95 |
| 1431 AMP54 (with audio & PAL) | 219.09 | 251.95 |
| 1451 (653x582 dots) | 234.74 | 269.95 |
| 1451 AMP54 | 313.00 | 359.95 |
| TATUNG TMO 1A Colour for BBC | 165.17 | 189.95 |
| BBC ROM UTILITY SOFTWARE | | |
| Wordwise | 31.26 | 35.95 |
| Wordwise Plus | 40.65 | 46.75 |
| View 2.1 | 41.26 | 47.45 |
| View 3 | 61.00 | 70.15 |

Sorry, office only - No callers without appointment

Prices and specifications subject to variation.
Please phone for best prices

UPGRADE TO IBM STANDARD

TRADE-IN YOUR BBC FOR THE
PC1512 IBM CLONE
Telephone for Details

| AMSTRAD PC1512 | Ex VAT | Inc VAT & Carriage |
|-----------------------------|--------|--------------------|
| S Drive Mono Monitor | 379.95 | 436.94 |
| Dual Drive + Mono Monitor | 489.95 | 563.44 |
| 20Mb Mono Monitor | 729.95 | 839.44 |
| Single Drive Colour Monitor | 519.95 | 597.94 |
| Dual Drive Colour Monitor | 639.95 | 735.94 |
| 20Mb Colour Monitor | 829.95 | 954.44 |


**AMSTRAD PC FROM
£379.95**

| COMPUTERS | | |
|------------------------------|--------|------------------|
| Master 128 includes software | 375.00 | 431.95 |
| Compacts | | Phone for latest |
| OTHER BBC PERIPHERALS | | |
| Teletext Receiver | 188.95 | 217.29 |
| 6502 Second Processor | 177.50 | 204.13 |
| Z80A Second Processor | 312.95 | 359.89 |
| ATPL ROM Board | 39.09 | 44.95 |

| MEDIA - ARCHIVE DATA | | | BULK PURCHASE SPECIAL! | |
|--|----------|-------|------------------------|--|
| (Fully guaranteed) | | | | |
| High quality diskettes 5.25" boxed in 10's | | | | |
| 40 Track SSSD | includes | 6.91 | 7.95 | |
| 40 Track DSDD | FREE | 6.91 | 7.95 | |
| 80 Track SSSD | library | 6.91 | 7.95 | |
| 80 Track DSDD | case | 6.91 | 7.95 | |
| 3" Box of 10 | | 27.78 | 31.95 | |
| 3" Disc (each) | | 2.78 | 3.20 | |
| HEAD CLEANING KITS | | | | |
| 3M Standard | | 13.87 | 15.95 | |
| Rexel DriveVDU | | 19.96 | 22.95 | |

Don't be a drip!

COMPUTING IN ACTION

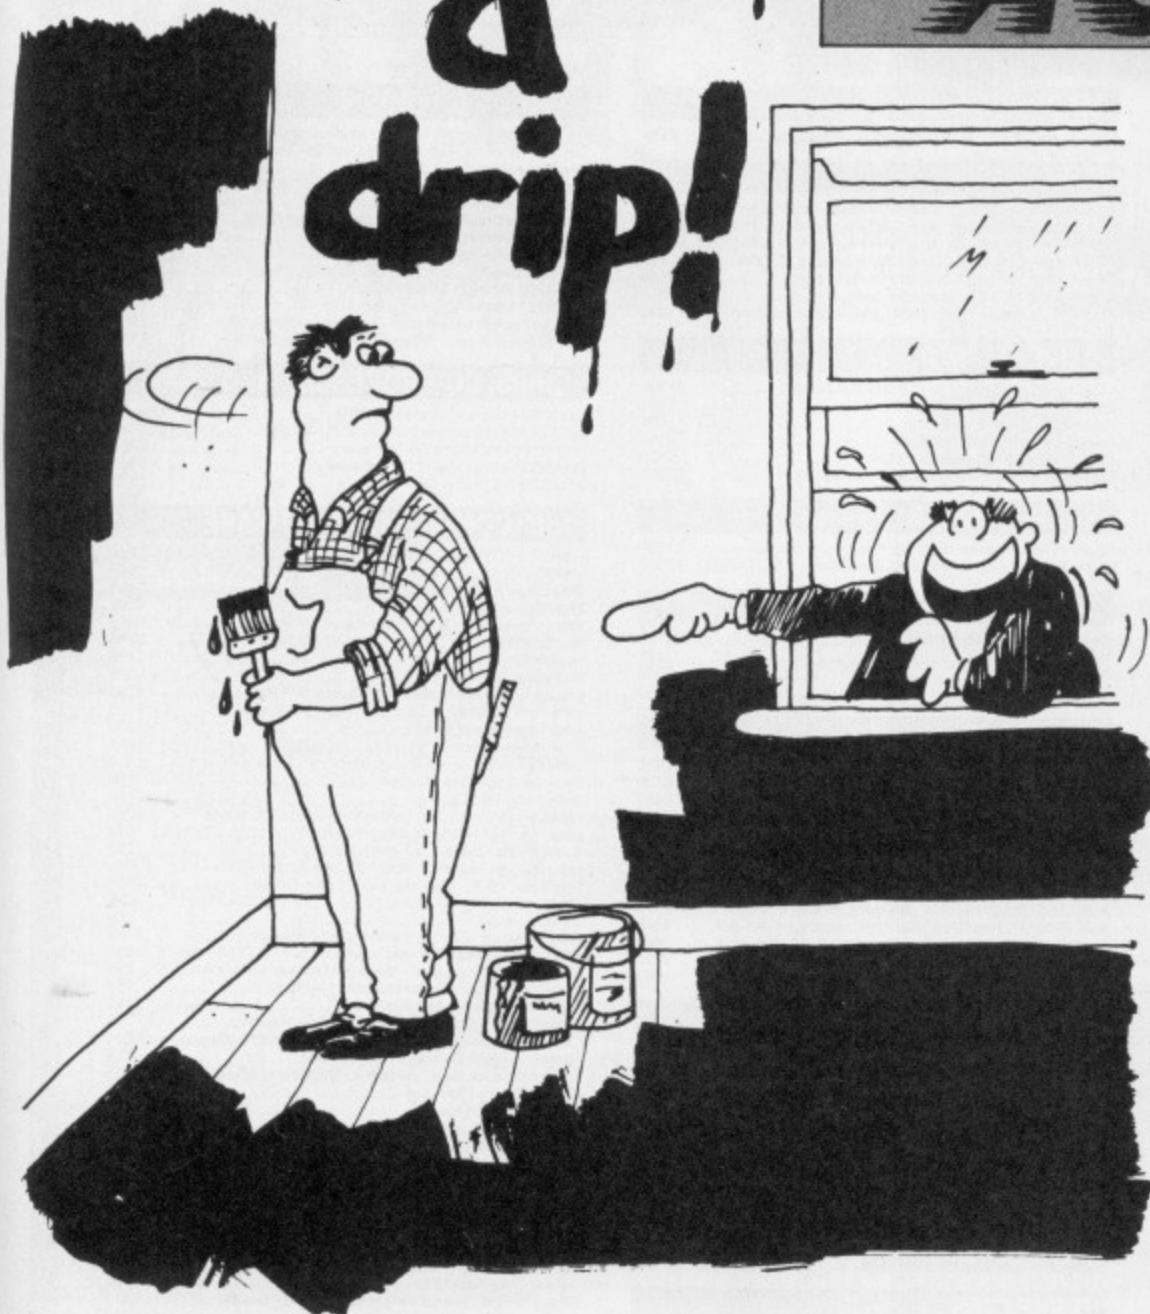

Estimate your paint requirements with David Willis

FIGURING out the amount of paint you need for a room is usually a matter of trial and error. You end up either buying too much, in which case you increase the pile of old but full cans in the shed, or else too little and then have to take the risk of the next can you buy not quite matching.

This month's Computing in Action takes away that guesswork and given the correct information the program can provide you with an accurate estimate of the amount of paint needed.

Type in the program make sure there are no typing errors using the Get it Right! checksums and save it.

You will need to know the cost of the paint per litre and two litre tins, plus the coverage factor. This is the area (in square metres) one litre of paint will cover and you'll find it on the can. Finally you need the number of coats that will be applied.

The next stage is to enter the widths and lengths of all the rectangular areas to be painted. For instance, in a room where you are painting the woodwork only you need the complete length of the skirting board plus its height (add a little for shaping) in addition there is the door, its frame, the flat portions of the windows and so on.

We can't guarantee complete accuracy, but the program can certainly help reduce the guesswork.

**Get it
right!**

```

10 REM Computing in Action
20 REM Paint Calculator
30 REM by David Willis
40 REM (c) The Micro User
50 ON ERROR MODE7:PROCerr:END
60 MODE1:@X=&20205:PROCCoff
70 PROCbx("Paint Calculator",1)
80 C1=FNbx("Price: 1 litre tin",5,.5,
5):C2=FNbx("Price: 2 litre tin",9,1,10)
90 Co=FNbx("Coverage factor",13,5,20)
100 Ct=FNbx("Number of coats",17,1,3):
PROCClr(4)
110 NX=FNbx("Number of areas",5,1,50)
120 T=0:FOR AX=1 TO NX
130 PROCbx("Area "+STR$(AX),9)
140 H=FNbx("Height (m)",13,0.1,10)
150 W=FNbx("Width (m)",17,0.1,10)
160 T=T+H*W:NEXT:PROCClr(4)
170 PROCbx("Total area is "+STR$(T)+
sq.m.",5):PX=(T+Ct/Co)+1
180 PROCbx("Paint needed is "+STR$(PX)
+" litres",9):L2X=PX/DIV2:L1X=PX/MOD2
190 PROCg(2,4,3,36,17,12):P2=C2*L2X
200 PROCg(1,4,3,36,17,16):P1=C1*L1X
210 VDU28,8,28,34,17
220 PRINT L2X" x 2 litre = £"P2
230 PRINT L1X" x 1 litre = £"P1
240 PRINTTAB(19)"-----"
250 PRINTTAB(4)"Cost of paint £"P1+P2,
TAB(19)"=====:PROCClr(4):RUN
260 DEFPROCClr(YX)
270 PROCbx("Press SPACE",27)
280 REPEATUNTILGET=32:COLOUR 128
290 VDU28,0,30,39,YX,12,26:ENDPROC
300 DEFFNBX(t$,YX,Lo,hi):LOCAL X
310 t$=t$+"?"*STRINGS(6," ")
320 PROCCon:REPEAT PROCbx(t$,YX)
330 VDU8,8,8,8,8,8:INPUT"X";
340 UNTIL X>=Lo AND X<=hi
350 PROCCoff:VDU26:COLOUR128:=X
360 DEFPROCbx(t$,YX):PROCb(LEN(t$),YX)
370 PRINTTAB(0,0)t$;:ENDPROC
380 DEFPROCb(X%,Y%):LOCAL J%,K%
390 J%=20-XX/DIV2:K%=J%+X%
400 PROCg(2,J%-1,29-Y%,K%+1,33-Y%,12)
410 PROCg(1,J%-1,29-Y%,K%+1,33-Y%,16)
420 VDU28,J%,Y%+1,K%,Y%:COLOUR129
430 ENDPROC
440 DEFPROCg(CX,QX,RX,SX,TX,OX):GCOLOR,
128+CX:VDU24,QX+32+OX;RX+32+OX;SX+32-OX;
TX+32-OX;16:ENDPROC
450 DEFPROCCon:LOCALBX:BX=1
460 DEFPROCCoff:LOCALBX:BX=0
470 VDU23,1,BX;0;0;0;0;:ENDPROC
480 DEFPROCerr:@X=10:PROCCon:REPORT
490 PRINT" at Line ";ERL:ENDPROC

```

| | | |
|--------------|--------------|--------------|
| 10 = 00 | 180 = AC96 8 | 350 = EB16 0 |
| 20 = 00 | 190 = 2A9E 8 | 360 = 537 D |
| 30 = 00 | 200 = 9A62 F | 370 = 7B04 5 |
| 40 = 00 | 210 = 9F8C D | 380 = C1FC 3 |
| 50 = 5779 9 | 220 = 7E1 3 | 390 = E971 7 |
| 60 = 7ED4 8 | 230 = E4F4 7 | 400 = E286 9 |
| 70 = F5 B | 240 = 92C7 1 | 410 = 11E8 4 |
| 80 = 706B F | 250 = 1389 F | 420 = EDA5 9 |
| 90 = 2915 E | 260 = 7761 F | 430 = ED0F F |
| 100 = 9FC7 5 | 270 = D3AC F | 440 = F509 1 |
| 110 = 370 F | 280 = 50E7 F | 450 = 4D34 D |
| 120 = 6ED9 7 | 290 = 212 8 | 460 = DEC2 9 |
| 130 = D076 5 | 300 = 1FA9 3 | 470 = 1149 1 |
| 140 = C94C 6 | 310 = E91D F | 480 = BFA6 B |
| 150 = 8481 2 | 320 = 9113 F | 490 = 7580 7 |
| 160 = 20A1 5 | 330 = F18C D | |
| 170 = 6FAF 1 | 340 = 5D63 B | |



COMPUTER



"COME AND MEET OUR TRAINED SHOWROOM STAFF"

NARROW DOT MATRIX PRINTERS

| | |
|---|------|
| Epson LX800 - The Brand New Best Seller! | £192 |
| Star NL10 - The Number Two Seller-Best Spec | £179 |
| Panasonic 1081 120cps & 80 col - Brand New! | £149 |
| Panasonic 1091 - Byte Magazine Says It's No 1 | £227 |
| Epson FX800 - Brand New! 240cps! Wow! | £293 |
| Epson EX800 - 300cps & 80 column-Super Fast! | £373 |
| Seikosha MP1300AI - 300cps! | £299 |
| MP 165 - Cheap Fast And Good Quality 180cps | £169 |
| Oki Microline 182 - The Number 2 Brand | £187 |
| Oki Microline 192 - Perennial Favourite | £282 |

WIDE DOT MATRIX PRINTERS

| | |
|--|------|
| Star NX15 - The New Wide-body NL10! | £287 |
| Star NR15 - Replaces the SR15-A Great Mover | £397 |
| Panasonic 1595 - The Panasonic Favorite | £519 |
| Epson FX1000 - Brand New! Replaces FX105 | £384 |
| Epson EX1000 - 300cps & 136 column-Super Fast! | £496 |
| Seikosha MP5300AI - 132col Version of MP1300 | £439 |
| MP 200 - 200cps! 132 column! | £259 |
| MP 201 - 132 column 200cps | £294 |
| Oki Microline 193 - Worth A Look | £359 |
| Oki Microline 293 - Worth A Long Look | £608 |

24-PIN DOT MATRIX PRINTERS

| | |
|---|------|
| Epson LQ800 - Letter Quality-24 Pin Printhead | £420 |
| Epson LQ1000 - Letter Quality-24 Pins-132 Col | £570 |
| Epson LQ2500 - This one is really good! | £689 |
| Star NB15 - The big, up-market Star 24-pin 300cps | £588 |
| Star NB24-15 - Similar to above, but 216cps | £517 |
| Star NB24-10 - 80 column 24-pin winner | £413 |
| NEC P6 - Good Buy | £379 |
| NEC P7 - One of the Best Sellers Ever - 24 pin | £441 |

DAISY WHEEL PRINTERS

| | |
|--|------|
| Star Power Type 18cps - The Current Cheap One! | £179 |
| Juki 6100 - 20cps - Very Popular, still no. 1 | £253 |
| Juki 6200 - 30cps - Still Popular | £393 |
| Juki 6300 - 40cps - Very Up-Market | £639 |

COLOUR PRINTERS

| | |
|--|------|
| Okimate 20 Thermal Printer | £159 |
| Juki 5520 - The Market Leader - Fast! | £335 |
| Epson EX-Series Colour Option | £55 |
| NEC P565XL - Heavy-Duty Office Favorite! | £740 |
| Epson LQ2500 Colour Option/Makes LQ2500 Colour | £55 |
| Seikosha MP1300 Colour Kit/Makes MP1300 Colour | £87 |

INK JET PRINTERS

| | |
|--|------|
| Epson SQ2500 - Ink your jet with this one! | £970 |
|--|------|

PLOTTERS, DIGITIZERS & LASERS

| | |
|---|-------|
| HP LaserJet II - Newer, Better, Cheaper! | £1945 |
| Cherry A3 Digitizer | £475 |
| Roland DXY-880A Plotter - Best Value A3 Plotter | £600 |
| Roland DXY-990A Plotter | £922 |
| Epson GQ3500 - Brand new with HP Emulation! | £1222 |

RIBBONS

| | |
|---|------------|
| Epson FX80/85/800/LX800 (also MP165, Juki 5510) | £4.75 each |
| Longbow FX80/85/800/LX800 compatible ribbon | £2.80 each |
| Epson EX-series cartridge ribbon | £7.51 each |
| Longbow Oki 182/192/193 compatible ribbon | £4.61 each |
| Longbow NEC P3-P7 black compatible ribbon | £4.85 each |
| NEC P-6 black ribbon | £7.88 each |
| Longbow Panasonic 1080-1081 compatible ribbon | £3.18 each |
| Star NL10 cartridge ribbon | £4.66 each |
| Longbow LQ800 compatible ribbon | £2.99 each |

NOTE: The minimum quantity for ribbon orders is three (3) units.

CABLES AND THINGS

| | |
|---|-----|
| IBM-Compatible Centronics Parallel Cable (Round) | £12 |
| BBC Centronics Parallel Cable (Ribbon) | £8 |
| Two-Way Printer T-Switch | £45 |
| 80 Col Printer Stands | £21 |
| SpaceBase Adjustable Floor-Standing Printer Stand | £85 |

AMSTRAD PC

| | |
|---|-------|
| Amstrad 1512 Single Floppy/Mono Monitor | £375 |
| Amstrad 1512 Double Floppy/Mono Monitor | £475 |
| Amstrad 1512 Single Floppy/Colour Monitor | £500 |
| Amstrad 1512 Double Floppy/Colour Monitor | £600 |
| Amstrad 1640 Single Floppy (EGA Colour 640k) | £730 |
| Amstrad 1640 Double Floppy (EGA Colour 640k) | £825 |
| Amstrad 1640 20mb Hard Disk (EGA Colour 640k) | £1095 |

EPSON PC's

| | |
|---|-------|
| Epson PC AX-20 Mark II (640k RAM, 20mb HD & EGA) | £1299 |
| Epson PC AX-40 AT (640k RAM, 1.2mb Floppy, 40mb HD) | £1649 |
| Epson PC AX-60 AT (640k RAM, 1.2mb Floppy, 60mb HD) | £2399 |
| Epson PCe (20mb XT with keyboard, DOS & mono monitor) | £950 |

All goods guaranteed. Official Purchase orders accepted from Government, Local Authorities, Universities and PLC's. All prices exclusive of VAT and subject to change without notice. Delivery charges extra. No returns or repairs accepted without Returns Authorisation Number (obtainable from our Technical Support Department). Defective dead-on-arrival merchandise repaired or replaced immediately at our carriage expense. Carriage on warranty repairs is paid by the customer. Non-defective credit returns subject to a 10% restocking fee. Technical support available Monday to Friday. Export and trade enquiries welcome.

FOR FULL PRICE LIST PLEASE CALL
TELEPHONE ORDERS WELCOME



0727-37451 / 72790



**SINGLE AND MULTI-USER
MICRO-COMPUTER
SOFTWARE SALES AND SUPPORT**

SHOWROOM • 99 PARK STREET LANE • BRICKETWOOD • HERTFORDSHIRE • AL2 2JA • ST ALBANS (0727) 72790

TELEX: 8960511 ONE ONE G (Quote Ref: 15412001)

HEAD OFFICE • UNIT A • CAXTON CENTRE • PORTERS WOOD • ST ALBANS • HERTFORDSHIRE • AL3 6XT • (0727) 37451

COMPUTER EXPRESS HOLLAND • NIJVERHEIDSWEG • N60 • 3812 PM • AMERSFOORT • NETHERLANDS • (33) 630544
COMPUTER EXPRESS AMERICA • 1713 S.E. ELLIS STREET • PORTLAND • OR • 97202 USA • TELEPHONE (503) 235 0277

MACDOUGALL PC's

| | |
|--|------|
| MacDougall 286 AT 512k 10mz/20mb HD/mono monitor | £999 |
|--|------|

TANDON

| | |
|---|-------|
| PCA 20mb Hard Disk AT (1mb RAM Keyboard DOS Monitor) | £1345 |
| PCA 30mb Hard Disk AT (1mb RAM Keyboard DOS Monitor) | £1569 |
| PCA 40mb Hard Disk AT (1mb RAM Keyboard DOS Monitor) | £1789 |
| PCA 70mb Hard Disk AT (1mb RAM Keyboard DOS Monitor) | £2145 |
| Target 20mb Mini AT (Complete mono system) | £1599 |
| Target 40mb Mini AT (Complete mono system) | £1814 |
| PAC-286 (complete EGA AT with removable 32mb hard disk) | £1996 |

OLIVETTI PC's

| | |
|---|-------|
| Olivetti M28 AT Compatible - 20mb Hard Disk | £1831 |
| Olivetti M240 Double Floppy | £759 |
| Olivetti M240 20mb hard disk | £1092 |
| Olivetti Mono Monitor for M240 | £167 |
| Olivetti 102-key Keyboard for M240 | £120 |
| Olivetti M380 40mb hard disk Compact System | £3307 |

SHARP PORTABLES

| | |
|--|-------|
| Sharp PC7100 20mb Hard Disk SuperTwist Screen | £1399 |
| Sharp PC7200 (20mb 80286 AT Super Twist & Super Fast!) | £2099 |

TOSHIBA

| | |
|-----------------------------------|-------|
| Toshiba T3100 20mb 80286 Portable | £2790 |
| Toshiba T1100 Plus | £1271 |
| Toshiba T1000 | £810 |
| Toshiba T1200 | £1946 |

MONITORS

| | |
|---|------|
| Eizo ER8042S 14in Ultra-High Res EGA Colour Monitor | £445 |
| ADI 14in Mono Monitor with Tilt/Swivel Stand | £120 |
| NEC Multi-sync EGA monitor | £489 |

ATARI

| | |
|--|------|
| Atari Expandable PC Twin Drive Mono (8088/2) | £579 |
| Atari Expandable PC 20mb Hard Disk Mono (8088/2) | £799 |
| Atari 520STFM 512k RAM, disk drive, mouse | £250 |
| Atari 1040STF 1mb RAM, disk drive, mouse, no monitor | £380 |
| Atari 1040STF with Mono Monitor, 1mb RAM, disk drive | £469 |
| Atari 1040STF with Atari SC1224 Colour Monitor | £670 |
| Atari SH204 20mb Hard Disk Drive | £478 |

ATARI TOP SELLING SOFTWARE

| | |
|--|------|
| Cyber Studio Cad 3D ver 2.0 - It's here at last! | £64 |
| Flight Simulator II - Very Realistic Best Seller | £36 |
| VIP Professional (Lotus Clone Gem Version) | £149 |
| Metacomco Lattice C Compiler | £71 |
| First Word Plus - Word Processor with Graphics | £62 |

CATS 'N' MICE

| | |
|---|------|
| Mouse Systems Mouse with Pop-Up Menus & PC Paint | £140 |
| Mouse Systems Mouse with Pop-Up Menus Only | £125 |
| Microsoft Bus or Serial Mouse - Don't forget the cat! | £132 |
| Logitech Logimouse C7 | £77 |
| Logitech Logimouse Plus Package | £89 |

DISKETTES

| | |
|--|------------|
| Computer Express 5.25in DS/DD 48tpi disks | £1.00 each |
| Computer Express 5.25in DS/DD 96tpi Hi-Density | £1.65 each |
| Computer Express Branded 3.5in DS/DD diskettes | £1.99 each |
| Un-branded Verbatim 3.5in SS/DD diskettes | £1.15 each |

COMMUNICATIONS

| | |
|---|------|
| Miracle WS4000 V21-V23 Modem | £139 |
| Miracle WS3000 V22 Professional Modem | £385 |
| Sage Chitchat Comms Pack (Modem/Software/Cable) | £199 |
| Crosstalk IV Comms Software | £93 |
| Sage Chitchat Comms Software | £71 |
| One-To-One Electronic Mail Subscription | £20 |
| RS232 serial modem cable | £15 |

HARD DISKS

| | |
|--|------|
| Dysan/Western Digital 20mb File Card | £279 |
| Miniscribe 32mb ScribeCard Hard Disk Card | £295 |
| Western Digital 32mb FileCard (with X-Tree software) | £299 |
| Seagate 20mb Hard Disk with WD controller and cables | £225 |
| Plus HardCard 20mb | £525 |
| Plus HardCard 40mb (the quality leader) | £850 |

SPECIAL OFFERS

| | |
|--|-------|
| LX-86 Auto Sheet Feed | £39 |
| Olivetti M24 20mb Hard Disk complete mono system | £1199 |
| M24SP Complete System (Monitor/Keyboard/DOS) | £1399 |

ADD-ON BOARDS

| | |
|--|------|
| AST SixPack Plus 64k memory Multifunction Card | £165 |
| Qubie SixShooter Multifunction Card 64k memory | £125 |
| Intel AboveBoard with 0k installed | £199 |
| Everex Mini Magic Ram Expansion Card (384K) | £117 |
| Hercules Graphics/Graphics Plus Card | £179 |
| Everex EverGraphics Plus (Clone Hercules Card) | £95 |
| Eizo Auto-Switch EGA Card | £199 |
| Paradise Auto-Switch EGA Card | £219 |
| AST Rampage | £200 |
| AST 3720 Terminal Emulation Card | £649 |
| AST 5251 Model 12 Remote Emulation Card | £525 |
| AST SixPack Premium 256k Clock Parallel & Serial | £330 |
| AST SixPack Premium 1mb EMS daughter board | £150 |

CHIPS, CO-PROCESSOR AND DRAM

| | |
|--|------------|
| 64k dRAM chips (nine to make 64k) | £1.15 each |
| 256k dRAM chips (nine to make 256k) 150 N.S. | £3.00 each |
| Intel 8087 5mz Maths Co-Processor | £95 |
| Intel 8087-2 8mz Maths Co-Processor | £135 |
| Intel 80287-8 Maths Co-Processor | £185 |

IBM-COMPATIBLE SOFTWARE

| | |
|--|------|
| WordStar 2000 Plus release 2 | £229 |
| WordStar 3.4 | £149 |
| WordStar Professional Version 4 | £193 |
| WordStar 2000 Plus | £269 |
| Word Perfect ver 4.2 - The Number 1 WP Package | £219 |
| Microsoft Word ver 3 - Number 2 WP Package | £249 |
| Multimate ver 3.31 | £189 |
| Multimate Advantage II | £275 |
| Lotus Manuscript - Latest Blockbuster WP Package! | £235 |
| PFS: First Choice | £108 |
| PFS: Professional Write | £120 |
| Framework II Version 1.1 | £311 |
| Symphony version 1.2 (Latest Version) | £318 |
| Symphony Spelling Checker | £69 |
| Symphony Text Outliner | £60 |
| Lotus 1-2-3 ver 2.1 Top Selling Package In The World | £222 |
| Lotus Spotlight - The desktop manager! | £39 |
| Lotus Metro - Lotus front-end organiser | £53 |
| Lotus Report Writer - A must for Lotus fans! | £75 |
| Supercalc ver 4 - The Celebrated Lotus-Beater! | £192 |
| Grafax Logistix | £79 |
| Javelin | £89 |
| Smart System - The Best Integrated Package | £349 |
| Executive Systems X-Tree (Super Friendly HD Organizer) | £40 |
| Executive Systems Hot! - Make own menus and hot keys! | £36 |
| Rosesoft Prokey - Customise your keyboard | £55 |
| Pegasus Accounts (per Module) | £199 |
| Pison Chess - You too can play like Gary Kasparov | £19 |
| Quaid Software Copywrite (Back up Protected Software) | £35 |
| Microsoft Flight Simulator - Don't crash! | £39 |
| Microsoft Quick Basic version 3 - The Ultimate Basic | £55 |
| Funk Software Sideways | £40 |
| Living Videotext Ready! | £50 |
| Borland Turbo Lightening | £47 |
| Microsoft Windows | £59 |
| Norton Utilities 4 - Every user need this one! | £52 |
| Norton Commander - Control program for power users! | £35 |
| Ventura Desk Top Publisher | £527 |
| Freetance Plus | £266 |
| Delta Professional | £319 |
| Ansa Paradox II - Multi-User Database! | £289 |
| Cardbox Plus | £225 |
| Ashton-Tate Rapid File | £199 |
| dBase III Plus - Best Selling Professional Database | £349 |
| FoxBase Plus | £269 |

LOW-COST SOFTWARE

| | |
|--|------|
| VP Planner by Paperback Software - Best Seller! | £61 |
| VP Info (dBASE II Clone) | £62 |
| VP Expert | £75 |
| Borland Sidekick - The Original Co-Resident Process! | £49 |
| Borland Turbo C - C How You Like This! | £65 |
| Borland Turbo Pascal - The Classic Borland Product | £47 |
| Borland Turbo Basic | £55 |
| Sage Bookkeeper | £75 |
| Sage Retrieve Database | £71 |
| Sage PC Planner Spreadsheet (Lotus Clone) | £71 |
| Sage Desk-Set | £49 |
| Sage PC-Write Word Processor | £71 |
| Sage Accountant | £110 |
| Sage Accountant Plus - Top Selling Cheap Accounts | £155 |
| Sage Payroll | £85 |
| Sage Financial Controller - Just reduced from 995! | £240 |
| Personal Word Perfect | £139 |
| Word Perfect Junior | £75 |
| Microsoft Word Junior | £59 |
| WordStar 1512 | £60 |
| Amstrad Multiplan Junior | £59 |
| Amstrad Supercalc 3 | £60 |
| Amstrad Amstrad Reflex | £75 |
| Precision Software Superbase Personal | £40 |
| Migent Ability - Top Integrated Package | £40 |
| Migent Ability II - Spend a Little More, Mate! | £119 |
| Words & Figures - Lotus 123 V1 Clone with WP | £80 |

P298 CEEFAX 797 Fri 20 Mar 11:34/53
1/36

YOU ARE WATCHING
ITEMS OF NEWS AND INFORMATION FROM

CEEFAX
THE BBC'S TELETEXT SERVICE

The full service offers several
hundred pages and is available to
anyone with a suitably-equipped
television set.

CEEFAX

Guide

October 2 to 8

KeyEcho Talking DemoKey Speller

Let your micro speak! This machine-code routine will read each key to you as it is pressed. A spelling test game is also included. (Requires the Acorn speech system)

DateInf Datebas Dater

Automatically date and time stamp files when they are saved from a BBC Master.

TextRd

Read any text file from any source (including all the telesoftware text files) from either tape or disc.

OSBITS

The first in the repeated OSBITS series guiding you through the complexities of Assembler language programming on the BBC Micro. This first module uncovers some of the history of computing by way of an introduction to this very popular 26-part course.

Rhondo

The classic shooting gallery game from the pages of the February issue of *The Micro User*.

Review

Continuing our service offering reviews of educational software and hardware for schools.

Notes

Teachers' notes for a variety of BBC TV and radio educational programmes.

October 9 to 15

TVdiary TVprogs

Keep a record of the TV programmes you want to watch or record. This software will offer you the Ceefax TV listings for you to make your selections. Programmes are sorted into date and time order, and any overlapping

Software is currently transmitted for a period of one week. Downloading can take place from Friday evening to the following Thursday evening. As the updating takes place on a Friday, we do not advise attempting to download software between 9am and 7pm on Fridays. The program details given are provisional.

presentations are indicated. A schedule for you to set your video recorder is also listed.

Astro Ast/Inf

Convert between equatorial and galactic coordinates, using three of the more common methods of mapping the heavens.

T/OSB01 B/OSB01

Part one of our OSBITS course guiding you through the intricacies of machine code programming.

PerCent

Calculates mark-up rates and profit margins and gives an explanation.

Dino

All action arcade classic from the March issue of *The Micro User*.

Review

Continuing our service offering reviews of educational software and hardware for schools.

Notes

Teachers' notes for a variety of BBC TV and radio educational programmes.

October 16 to 22

Snap General Use MoveUp

Save a snapshot of your computer's memory at regular intervals. The package includes a six-page instructional guide.

T/SWR00 B/SWR00

The start of a new programming

series dealing with the use of Sideways ram (SWR). Our new guide aims to explain what SWR is and how to write software to make use of its facilities. Many example programs and routines will be included in the course.

T/OSB02 B/OSB02

The second module in our series designed to explain the techniques of assembly language programming.

Diamond Quest

A great arcade adventure from the pages of the July issue of *The Micro User*.

Review

Continuing our service offering reviews of educational software and hardware for schools.

Notes

Teachers' notes for a variety of BBC TV and radio educational programmes.

October 23 to 29

B-Ships B/Ship

The game of Battleships, fought between you and the computer or between two players.

T/SWR01 B/SWR01

Following last week's introduction, this is the first module in our guide for programmers explaining how to use Sideways ram.

AuLd

Download all the telesoftware files you want from Ceefax without the need to return to the computer between files.

T/OSB03 B/OSB13

Part 3 of the OSBITS guide to assembler language programming on the BBC Micro.

Soccer Manager

Accept the challenge of managing a football game with this addictive game from the pages of *The Micro User*.

Review

Continuing our service offering reviews of educational software and hardware for schools.

Notes

Teachers' notes for a variety of BBC TV and radio educational programmes.

October 30 to November 4

FXHelp Help FXdata Hlp/Inf

Create your own individual "Help" file of details commonly used commands and the information will be available at the press of a button whenever you want it.

T/SWR02 B/SWR02

The second module of our important new series explaining the mysteries of using Sideways ram.

T/ATS04

Module 4 in our repeated series helping you get to grips with BBC Assembler Language.

Duck's Dinner

Guide Daffy Duck around the skull maze to find food in this game from the pages of the May issue of *The Micro User*.

Review

Continuing our service offering reviews of educational software and hardware for schools.

Notes

Teachers' notes for a variety of BBC TV and radio educational programmes.

DUNE HUNTER

By GORDON KEY

FOUR million years have elapsed since the inner galactic wars and still the dune worlds are infested with the Krotan Droids. While their memory has all but disappeared from most of the outer planets a little of the terror remains in the childrens' song *Dune Hunter*:

*Sleep little baby with eyes all aglow,
And dream of a time when krotan don't grow,
A time with no walkers a time with no greens,
A time when the nights are not wrought with their screams,
A time when the hunter will come from the skies,
With blue laser cannon to swat them like flies,
To frazzle the skitters and saucers and bombs,
Yes life will return when the Dune Hunter comes.*

Well, my friends, it is time we made the song come true. Each of you will be equipped with the latest five-life *Dune Flier*, fitted with multi-fire fusion lasers and a single-shot smartbomb. A single shot hyperdrive is also installed but this will only operate above 50 per cent altitude.


So depart my friends, enter the Dune worlds and rid the universe of the scourge of the Krotan Droids.

PROCEDURES

smart Activates smart bomb
hyper Activates hyperdrive
flash(C%) Flashes the background colour to C% for one frame
clear Resets the screen for the next phase
del(T%) Delays for T% centiseconds
tune Plays the phase start jingle
explo Explodes the ship
score Displays the current score
exel Moves the ship horizontally
map Sets the planet map
men Sets the evolution rate for the Krotan
Set Initialises a screen
init Initialises the game
hisc Displays the high score table
bel(N%) Fires the laser
head Prints the title
mup Sorts the high score table
gname Inputs a name
lines Draws two parallel lines in Mode 7
node(M%) Sets the mode to M% and removes the cursor
code Reads the code
readto(SS) Reads four characters at a time from S\$
dec(a\$) Decodes four characters into three bytes of code
p(A\$,B\$) Prints A\$ and B\$
shorten Shortens the program
relocate Relocates the program either up or down in memory

VARIABLES

E% CALL address to disintegrate ship
F% Fire flag
G% Pointer to ground map
H% Laser hit flag
I% General counter
J% Call address to halt ship
K% Pointer to Krotan *map1*
L% Number of Krotnans in existence
N% Ship speed limiter
O% CALL address for ship initialisation
Q% Main CALL address
S% Ship sprite number
T% General counter
U% Pointer to Krotan *map2*
X% Ship screen X coordinate
Y% Ship Y coordinate
Z% Ship X coordinate
h% Hyperdrive flag
hsn% Pointer to high score names
hs% Pointer to high score values
li% Number of lives
pl% Current planet number plus one
s% Current score
sm% Smart bomb flag
T acceleration value
C(I) Cosine look-up table
S(I) Sine look-up table

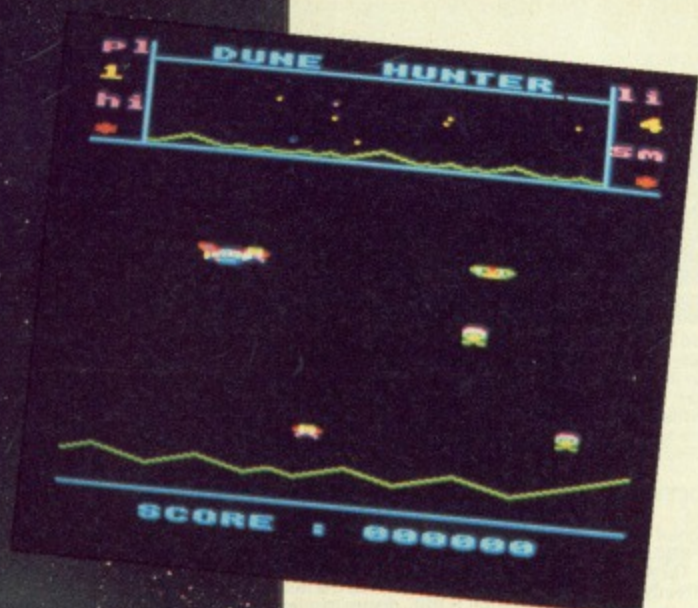

GAME



```

10 REM * DUNE HUNTER *
20 REM * G.J.KEY *
30 REM * (c) The Micro User *
40 REM
50 *FX3
60 IFTOP>83000THENMODE7:PROCshorten
70 MODE 2
80 PROCinit
90 REPEAT:PROCchisc
100 REPEAT:PROCmap
110 REPEAT:PROCset:PROctune
120 REPEAT:PROCexel
130 IFINKEY-99 IFFX=0 FX=2
140 IFINKEY-105YX=YX+4
150 IFINKEY-73YX=YX-4
160 IFINKEY-97PROCsmart
170 IFINKEY-85PROChyper
180 ?880=T:CALLQX
190 IFHX%PROCscore
200 UNTILCXORLX=0
210 IFLX=0:PROCclear:ELSE:PROCexplor
220 UNTILLiX=0ORLX=0:pLX=pLX+1
230 UNTILLiX=0:CALL&1455
240 UNTILFALSE
250 DEFPROCsmart
260 IFNOTsmXSOUND&10,-15,2,4:ENDPROC
270 smX=0:LOCALTX:(FORTX=0T07
280 IFTX?KX>6IF(((TX?&13EF)+?&83)AND&F
F)<76THENTX?KX=6:SOUND&10,1,6,1
290 NEXT:PRINTTAB(19,6)SPC1
300 ENDPROC
310 DEFPROChyper
320 IFNOTHXORYX>140SOUND0,-15,2,2:ENDP
ROC
330 PROCflash(4)
340 hx=FALSE:LOCALTX,IX,xX:TX=3
350 xX=0:IX=20+RND(20):REPEAT
360 ?880=TX*SGN(SX*2-1):CALLQX
370 TX=TX+1:xX=(xX+1)AND&FF
380 UNTILTIX>IXANDxX=880:?880=0
390 PRINTTAB(0,6)SPC1
400 ENDPROC
410 DEFPROCflash(CX)
420 VDU19,0,CX;0;:*FX19
430 *FX19
440 VDU19,0,0;0;
450 ENDPROC
460 DEFPROCclear
470 CALL&1455:sX=sX+500*pLX:PROCscore
480 VDU24,0;72;1279;788;16
490 COLOUR3:PRINTTAB(3,15)"PHASE ";pLX
-1;" COMPLETE"
500 COLOUR7:PRINTTAB(3,17)"PREPARE TO
ENTER"
510 COLOUR6:PRINTTAB(7,19)"PHASE ";pLX
520 FORTX=1T08:SOUND&101,0,0,3:SOUND&1
02,2,70+TX*15,3:NEXT
530 VDU26:PROCdel(200)
540 ENDPROC
550 DEFPROCdel(TX)
560 TIME=0:REPEATUNTILTIME>TX
570 ENDPROC
580 DEFPROctune
590 *FX15
600 RESTORE:REPEAT
610 READTX,DX
620 IFTX>0:FORIX=1T03:SOUNDIX,4,TX,DX:
PROCdel(2):NEXT
630 UNTILTIX=0ANDDX=0
640 ENDPROC
650 DEFPROCexplor
660 PROCflash(1)
670 LiX=LiX-1:IFFX<0:?880=0:CALLQX
680 PROCflash(3)
690 CALL&1130:CALLEX:iX=1:LX=-15:SOUND
0,LX,6,15
700 VDU24,0;72;1279;788;
710 VDU29,XX*16+64;1024-YX*4;
720 PROCflash(7):GCOL0,3:RX=0:rX=30
730 oX=0:REPEAT:FORIX=0T019
740 PLOT69,C(IX)*RX,S(IX)*RX-oX
750 NEXT:RX=RX+rX:rX=rX*.98:oX=oX+16
760 iX=iX+1:IFIx=5CALLJX:SOUND&10,LX,4
,15:iX=0:LX=LX+3
770 UNTILrX=1:VDU28,0,30,19,8,16,26
780 ENDPROC
790 DEFPROCscore
800 COLOUR6:sX=sX+HX*5
810 PRINTTAB(17-LENSTR$sX,31);sX;
820 ENDPROC
830 DEFPROCexel
840 LOCALfX
850 IFINKEY-66IFT>-NXfX=TRUE:SX=0:T=T-
.5:IFT>TRUE ANDT<1 T=TRUE
860 IFINKEY-21FT<NXfX=TRUE:SX=1:T=T+.5
:IFT<1ANDT>TRUE T=1
870 IFFXENDPROC
880 T=T-SGNT*.2
890 ENDPROC
900 DEFPROCmap
910 !&13DE=0:&13E2=0
920 PROCmen:CLS:COLOUR5
930 PRINTTAB(0,0)"pl"TAB(18,0)"li"TAB(
0,4)"hi"TAB(18,4)"sm"
940 COLOUR6:PRINTTAB(4,0)"DUNE HUNTER
.
950 GCOL0,6
960 MOVE128,984:DRAW1154,984
970 MOVE0,794:DRAW1280,794
980 MOVE120,794:DRAW120,1023
990 MOVE1154,794:DRAW1154,1023
1000 MOVE0,68:DRAW1279,68
1010 PRINTTAB(3,31)"SCORE : 000000";:PR
OCscore
1020 VDU19,2,pLX+(pLX=3)*2;0;
1030 AX=220:BX=1:RX=10
1040 FORTX=0T0127
1050 TX?GX=AX:(GX&FF-TX)=AX
1060 AX=AX+BX:IFAX>2220RAX<160BX=-BX
1070 RX=RX-1:IFRX=0BX=-BX:RX=RND(26)+4
1080 NEXT:GCOL0,2
1090 FORXX=0T0255:?870=XX-80
1100 IFXXMOD2PLOT69,128+XX*4,&300+(GX?(
?870))EOR255
1110 NEXT:LX=0:rX=30

```

Turn to Page 137 ▶

TWILLSTAR COMPUTERS LTD

Computers



ARCHIMEDES HIGH PERFORMANCE COMPUTER SYSTEMS

Archimedes systems use the Arthur operating system, a new version of the BBC Micro operating system. BBC BASIC is replaced by a new extended version, BBC BASIC V. The speed and power of Archimedes allows the programmer to exploit RISC architecture with a range of high level languages for scientific engineering and business uses. In addition to BBC BASIC V, Acornsoft's development languages include C, ISO-Pascal, FORTRAN, Lisp and Prolog. The Acornsoft Software Developers Toolbox provides utilities to simplify program development and debugging, while an extensive Software Developer's Debug Tool facilitates high level language development in C, Pascal or FORTRAN. All Archimedes Systems have a floating point emulator as standard. On the 400 series, complex mathematical calculations can be further enhanced by the addition of a floating point unit (FPU). All machines have feature: 32 bit RISC technology - BM enhanced style keyboard with 3 button mouse - BBC Micro style operating system (Arthur) - BBC BASIC V - interfaces; printer, serial, monitor, stereo sound - ECONET plug-in option - a variety of modules can be fitted. Archimedes is an open system and its flexibility is achieved by fitting any of the following modules (peripheral modules) via a back plane: hard disk controller (300 series only) - ROM extension board - MIDI music interface - MS-DOS co-processor - SCSI - hardware floating point unit - Ethernet module.

THE 300 SERIES Consists of two models, Archimedes 305 0.5 Mbyte of RAM and Archimedes 310 with 1 Mbyte of RAM. Both machines have a 512 Kbyte ROM and a 1 Mbyte (unformatted) 3 1/2" disc drive.

THE 400 SERIES Offers increased expansion capabilities. The Archimedes 410 has 1 Mbyte of RAM, 1 Mbyte (unformatted) 3 1/2" disc drive, a hardware floating point unit option, a co-processor bus, a hard disk controller, a four socket back plane, 512 Kbytes of ROM. At the top of the range is Archimedes 440. This machine possesses all the features of the 410 as standard, with the adoption of 4 Mbytes of RAM and a 20 Mbyte hard disk.

| | |
|--|---------|
| 305 BASE AKB10 | 918.85 |
| 305 & mono monitor | 976.35 |
| 305 & colour monitor | 1148.85 |
| 310 BASE AKB15 | 1006.25 |
| 310 & mono monitor | 1063.75 |
| 310 & colour monitor | 1236.25 |
| 410 BASE AKB26 | 1608.85 |
| 410 & mono monitor | 1666.35 |
| 410 & colour monitor | 1838.85 |
| 440 BASE AKB20 | 2643.85 |
| 440 & mono monitor | 2701.35 |
| 440 & colour monitor | 2873.85 |
| Archimedes/Master Econet | 49.99 |
| 0.5 MB RAM | 102.35 |
| Floppy disk | 143.75 |
| 20 Mbyte hard disk & podule (300 only) | 573.85 |
| Podule Backplane | 40.25 |
| ROM Podule | TBA |
| I/O Podule | TBA |
| MIDI add-on to I/O | TBA |
| A series reference manual | £19.95 |

MASTER 128

| | |
|---------------------------------|---------|
| Complete With Internal Software | £399.00 |
| Master Turbo Upgrade | £113.95 |
| Master Econet Module | £46.00 |
| Master ET | £349.00 |
| Master 512 Upgrade | £217.35 |

The Master 512 upgrade board incorporates the Intel 80186 processor, plus 512K bytes of RAM. Digital Research DOS+, which is compatible with both MS/DOS version

2, and CP/M 86, allows you to run a large proportion of the most useful programs available. A dual 80 track disc drive is required to run programs on the 512. Provided free with 512 upgrade board are three GEM packages, GEM Desk Top, GEM Write, GEM Paint.

UNIVERSAL SECOND PROCESSOR

This allows you to connect co-processor boards designed for the Master Series to your BBC Models B or B+. Fitting a Turbo board boosts the BBC's already rapid performance to twice the speed of the standard processor. Fitting the 512 co-processor converts the BBC micro into a 16 bit machine, opening up new possibilities within the world of MS-DOS and CP/M 86.

| | |
|-------------------------|---------|
| Epm Cartridge | £14.95 |
| Reference Manual Part 1 | £14.95 |
| Reference Manual Part 2 | £14.95 |
| Acorn Teletext Receiver | £108.00 |

FILESTORE

Filestore provides shared access to file and printer services on Econet. The filestore consists of two units - a dual 3.5 inch floppy disc unit 1.2 Mbytes of storage (Filestore EO1) which can be expanded with a high performance 20 Mbyte Winchester disk drive unit (Filestore E20).

| | |
|---------------|---------|
| FILESTORE EO1 | £952.00 |
| FILESTORE E20 | £829.00 |

ECONET ACCESSORIES

| | |
|-----------------------------|---------|
| 100m Cable | £89.00 |
| Station Lead Set | £29.00 |
| Econet Starter Kit | £99.00 |
| Econet Bridge | £199.00 |
| Level 1 Fileserver 40 Track | £99.00 |
| Level 2 Fileserver 80 Track | £235.00 |
| Print Server Epm | £49.00 |

BBC Upgrades

| | |
|--------------------|--------|
| 64K Upgrade Kit | £39.95 |
| 17/70 Upgrade Kit | £49.94 |
| ADFS ROM | £29.95 |
| Disc Upgrade Kit | £65.00 |
| Econet Upgrade Kit | £49.00 |
| DNFS ROM | £20.00 |

WORD PROCESSING SPECIAL PACKAGE

PACKAGE 1

Based on Master 128. The Twillstar All in One Word Processing Package contains a Master 128, View 3.0, Viewsheet, High Res Green Monitor, 800K Dual Drives with PSU, Quendata Daisy Wheel Printer together with a box of Discs, Paper, and all the Cables. £899.00

PACKAGE 2

Based on Master Compact 128. The Twillstar package includes Compact 128, latest version of the View Word processor, single 640K disk drive, monochrome monitor, correspondence quality printer. All connecting cables for above and also 5 disks and some paper. £635.00

BBC Master Compact

Twillstar continues to offer the MASTER COMPACT for your Home Education and Business needs! Complete with bundled software and an integral 3.5" Disk Drive in the following Systems:-

| |
|---|
| ENTRY SYSTEM £360.00 |
| *128K* *Single 640K Drive* *bundled software* |
| TV SYSTEM £375.00 |
| *128K* *Single 640K Drive* *UHF Modulator* *Bundled Software* |
| MONO SYSTEM £412.00 |
| *128K* *Single 640K Drive* *Bundled Software* *12" High Res Monochrome Monitor* |

COLOUR SYSTEM £565.00

128K *Single 640K Drive* *Bundled Software* *14" Medium Res Colour Monitor*

SPECIFICATIONS: * Compatible with Master Series micro subset * 128K RAM inc 64K sideways RAM * 64K ROM inc 32K MOS, 16K BASIC * Up to 4 internal ROM sockets * 3.5" 640K formatted disk drive * **OUTPUTS:** Video/RGB/Printer/ Mouse or Joystick * Disk drive * (optional) Econet * Serial * 5V power from disk drive module * Usual 8 BBC display modes inc. Mode 7 * **BUNDLED SOFTWARE:** Pull down menus * Desk top inc. note pad, calculator * VIEW 3.0 * CARD INDEX * Full LOGO * BBC BASIC 4.0 * ADFS * Utils * Welcome suite * Tutorials * (1770 DFS under licence)

2nd DRIVE KIT £113.00

Monitors

MONOCHROME MONITORS

Phillips BM 7502
12" hi res. P31 Green Phosphor Screen. CVBS input. Audio input. Band width 20 MHz. 2000 CHRS Display. Adjustable viewing angle. £79.00

Phillips BM 7522 Amber Screen £95.00
Phillips BM 7542 Dedicated WD phosphor Screen monitor £95.00
Phillips BM 7513 12" Green IBM compatible £120.00

TAXAN

New Taxan Monochrome Screens
Taxan KX117 12" Green Screen P31 £89.00
Taxan KX118 12" Green Screen P39 £99.00
Taxan KX119 12" PUL Amber Screen £99.00

COLOUR MONITORS

Microvitec 1431 Std Res £201.25
Microvitec 1451 Med Res £255.00
Microvitec 1441 Hi Res £391.00
Microvitec 2030 Cs 20 Std Res £425.50
Microvitec 1431 AP Std Res £224.25
Microvitec 1451 Ap Med Res £293.25

PHILLIPS

New from Phillips
Phillips CM8833 14" CVBS and RGB medium resolution colour monitor. IBM PC compatible. Fast blankup to enable superimposing. Stereo Audio. Ear phone socket. 600 dots x 285 lines vertical £269.00
Phillips CM8852 14" RGB professional med res colour. 700 dots x 285 £289.00
Phillips CM8873 14" RGB high resolution colour monitor Res 850 x 480 £550.00

Taxan Super Vision 620

High Resolution colour monitor with several unique features, at an affordable price.
SUPERVISION 620
12" RGB High resolution colour monitor. Fully compatible with IBM, Apple, BBC and most other Personal Computers. 635 x 312 line resolution. Positive or negative sync input. Text colour switchable to green, amber, white or blue or inverse white. Super high contrast tube. Optional tilt-swivel base (with clock/calendar available). Special introductory offer. £299.00

NEW SUPERVISION 625

12" high resolution colour monitor. 661 dots x 312 lines £369.00

MONITOR TO TV CONVERTER

AV 7300 Colour tuner module Push button control. 12 preset channels. Built in aerial. Compact design. Composite video only £69.00

Mitsubishi 1404 Medium Resolution Monitor with 640 X 200 Pixels RGB available with IBM or BBC Leads. £249.00

Disc Drives

MITSUBISHI DISC DRIVES

User Friendly Disk Drives 100% BBC compatible slimline disc drives. All drives are supplied complete with formatting diskette, comprehensive users manual and all necessary cables. All drives are 40/80 Track switchable at the front and have two years warranty.

5 1/4" Drives without P.S.U.

MD 400A Single 400K Double Sided £118.00
MD 802C Dual 400K Double Sided £219.00

5 1/4" Drives with P.S.U.

MD 400B Single 400K Double Sided £135.00
MD 802E Dual 400K Double Sided £249.00

SPECIAL

MD 802D Dual 400K Drives horizontally mounted in a monitor stand to fit both the BBC B and the Master series. £269.00

SOURCE DISK DRIVES

Source SD35 3 1/2" disk drive, single drive £85.00
Source SD352 3 1/2" dual drive £149.00

Supplied cased complete with cables, powered from computer. Extended two year warranty.

Source SD35S 3 1/2" single drive with P.S.U. £135.00

Source 352S 3 1/2" dual drive with P.S.U. £199.00

Source SD3545S Combo dual 5 1/4" and 3 1/2" drives with P.S.U. £249.00

Winchester Disk Drives

WINCHESTER DISK DRIVES

Source HD20 Twillstar's 20 Mbyte winchester drive including Acorn DFS ROM complete with P.S.U. £599.00

Source HDP201 Twillstar's 20 Mbyte winchester drive and a 400k double sided floppy drive built in a plinth to accommodate monitor on the top and the computer underneath. Includes ADFS ROM and P.S.U. £869.00

Source TS10 10 Mbyte tape streamer backup unit with utilities £695.00

Other size hard disks are available, please call for our latest prices.

Accessories

Taxan KIF 4308 buffer compatible with any Centronics interface printer £149.00
Further 64k upgrade available. Printer/Computer sharers.

2 - 1 £39.00
6 - 1 £79.00

Serial and Parallel T Switches
Parallel T switch £67.85
Serial T switch £67.82

FLOPPY DISKS

Raven 5 1/4" pack of 10 in a clear library box £15.00
Raven 5 1/4" rainbow colour pack of 10 in library box £17.00
Raven 3 1/2" single sided pack of 10 in library box £18.00
Raven 3 1/2" double sided pack of 10 in library box £25.00

LOCKABLE STORAGE BOXES

Trackmaster 5 1/4" 70 x 5 1/4" lockable £7.95
Trackmaster 5 1/4" 100 x 5 1/4" lockable £9.95
Trackmaster 3 1/2" 40 x 3 1/2" lockable £6.95
Trackmaster 3 1/2" 100 x 3 1/2" lockable £9.95

YOUR ONE STOP MEGA-COMPUSTORE FOR HOME, EDUCATION & BUSINESS NEEDS!

Printers


SPECIAL OFFER

SAVE £29.00

FREE PRINTER STAND
FREE BBC CABLE

200 SHEETS OF PAPER

When you buy a
Panasonic KX-P1081 The
faster and enhanced KX-P1081.
120 cps in draft mode. 24 cps
in NLQ mode. Fully Epson RX80
and IBM Matrix and Graphics
Printers compatible. Standard
friction and tractor feed.
Operator accessible print mode
switch. Standard 8 bit parallel
interface. RS232 interface
is optional **£179.00**

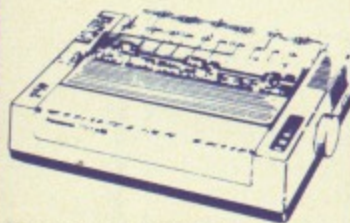

EPSON PRINTERS

LX-800 £228.85
Draft print to 180cps. NLQ text to 25cps.
Two correspondence fonts. Pull-feed tractor
supplied as standard. IBM character
set. Integral 3K buffer. Graphics capability.
Push-button controls. Standard centronics
interface.

FX-800 £368.00
FX-1000 £497.95
Correspondence quality to 40cps. Draft
speed to 240cps. Wide range of types-
styles. High resolution graphics. Powerful
8K buffer. IBM character set. Easy-reach
control panel. Choice of wide or narrow
carriage. Tractor feed now standard.

EX-800 £458.85
EX-1000 £626.75
Fast 300cps draft print. Correspondence
quality to 50cps built in. High resolution
graphics. Powerful 8K buffer. IBM charac-
ter set. Advanced front control panel.
Choice of wide or narrow carriage. Stan-
dard push-feed tractor. Short tear-off fea-
ture. Two-stage automatic paper loading.
Reverse paper feed.

LQ-800 £494.50
LQ-1000 £667.00
Superb letter quality print at 60cps. One
letter font built in. High resolution
graphics. Powerful 7K buffer. Draft speed
180cps. Easy-use control panel. Choice of
wide or narrow carriage. Serial and paral-
lel interfaces built in.

LQ-2500 £994.75
Superb letter quality at 90cps. Draft speed
to 270cps. Five fonts built in. High resolu-
tion graphics. Powerful 8K buffer. IBM
character set. New select Type panel re-
placing DIP switch. Push-feed tractor built
in. New LCD message screen. Serial and
parallel interface built in.

SQ-2500 £1294.90
Virtually silent print. Superb letter quality
at 180cps. Draft speed of 540cps at 12cpi.
Five fonts built in. High resolution
graphics. Powerful 8K buffer. IBM charac-
ter set. New select Type panel replacing
DIP switch. New LCD message screen.
Serial and parallel interface built in.
50dBa

CREDIT FACILITIES

Full credit facilities now
available nationwide

- LOW DEPOSITS
- FAST FRIENDLY SERVICE
- UP TO 3 YEARS TO PAY

Call for further details

Typical APR 36.3%

CANON PW1080A

80 column printer with 160 cps draft
and 40 cps NLQ with built in friction
and tractor feed. Fully compatible
with Epson FX80. Standard parallel
interface. **£249.00**

CANON 55A

Wide version. Fully IBM
compatible. **£399.00**

STAR NL-10

Fine Near-Letter-Quality, 100%
compatibility and total
reliability all in one easy to use
printer **£209.00**

STAR NX-15


Same as Star NL-10 but with 136
column width. Both Epson and IBM
compatible **£399.00**

MP200

200 cps in draft. 40 cps in NLQ mode.
7K buffer as standard (128 down-
loadable characters in NLQ) optional
8K memory. IC font cards. **£274.85**


MICRO P MP165

80 Columns. 165 cps in draft mode.
35 cps in NLQ mode. Ultra high
resolution graphics. Friction and
traction feed. 2 Year warranty. Epson
or IBM compatible control codes. **£199.00**

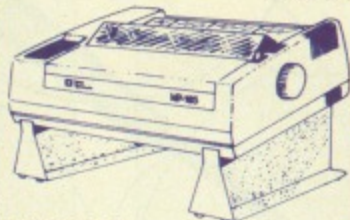

MP201

Same as MP200 with 136 columns
£318.55



MP135

Just released

135 cps, 80 column printer. Friction/
tractor feed. NLQ. Epson & IBM
Compatible **£145.00**

MP480

New

Fast reliable 480 cps dot matrix
printer. 74 cps, NLQ, 80 column, fully
Epson & IBM compatible, Std
parallel **£349.00**

TAXAN KXP815

Taxan KXP 815 New enhanced KP
810 with 160 cps and fully Epson &
IBM Compatible **£299.00**

TAXAN KXP915

Taxan KXP 915 New enhanced KP
915 with 180 cps and fully Epson &
IBM Compatible **£420.00**

CITIZEN MSP10E

160 CPS Draft and 40 CPS NLQ. With
two years warranty **£269.00**

CITIZEN MSP-15E

17" wide carriage. 136 column
operating at 160 CPS and at the flick
of a switch will print near letter qual-
ity at 40 CPS. Fully Epson and IBM
compatible. 8k of standard buffer
built in. Standard Centronics are op-
tional RS232 **£379.00**

CITIZEN 120D

Bringing to the small business,
educational and home user good
quality and attention to detail. Its
compact size, host of standard
features and built in quality and
reliability that supports Citizens
unique full 2 year warranty make it
a must for all computer users. Fast
draft output: 120 cps. Built-in NLQ:
25 cps. IBM and Epson compatible.
Plug-in interface cartridge. Tractor
and friction feed as standard.
Optional cut sheet feeder. **£172.50**


CITIZEN LASER OVERTURE 110

Overture 110 Prints 10 pages per
minute. Comes complete with
internal controller with print
resolution of 300 x 300 dots per inch.
Print capability of Standard Text,
IBM & Epson bit-map graphics, IBM
graphic character set, Epson graphic
character set. Resident fonts are:
Citizen Pica upright/italic, Citizen
Elite upright/italic, Citizen Courier,
Citizen Bookface (over 56 typefaces),
downloadable one character set in
Epson Mode. 11 international
character sets. Standard Centronics
Parallel and Serial RS232C. Standard
512K memory 384-byte user
available. Fully compatible with
Epson FX1000 IBM Proprietary &
Diablo 630. **£1529.50**

SOURCE

The Complete Solution

TECO VP1814



Dot matrix printer. The VP1814 is fast
highly reliable and easy to operate.

- ★ Standard 80 column
- ★ The high-speed, low energy
consumption 9 wire dot head gives
printing speed of 189 cps and NLQ
speed 36 cps

- ★ Bi-directional. Logic seeking in
text mode

- ★ Fan-fold, roll or cut-sheet paper is
possible with adjustable sprocket pin
feed and friction feed

- ★ Offers: emphasized, double print,
super script, sub script

- ★ Justified print modes are also
available including left, centre, right
and full justification

- ★ 9 graphic modes are available

- ★ Both download and inprint buffer
can exist simultaneously

- ★ 7K input buffer standard can be
expanded to 15K

- ★ Printing modes selectable at front
panel (NLQ/draft, Pica/Elite, enlarge,
emphasize, condense, italic)

- ★ 11 Language international
character font is internalized

- ★ Both IBM and Epson compatible

MAIN UK DISTRIBUTOR **£199.00**



SWIVEL BASE OFFER

Special summer price Tilt and swivel
base for 12" or 14" monitor or TV.
"Looks very elegant" at an unbeatable
price. **£9.95**



PRINTER STAND

Fits nearly any width of printer.
Allows paper storage and gives ideal
viewing position. Can also be used
for computers and monitors. Steel
construction prevents bending or
buckling **£18.00**

DAISYWHEEL



PANASONIC KX-P3131

A Fully Formed Serial Impact
Daisywheel printer with print speed
of 17cps. Diablo compatible print
wheels. Print pitches available are:
10, 12, 15 and proportional spacing.
Standard friction feed and optional
tractor. Paper width 13.5 inches.
Standard Centronics optional RS-
232C. Built with 6K text buffer
expandable to 32K buffer. **£289.00**

BROTHER HR 20

The new Brother Daisywheel HR 20
8K standard buffer upgradable to
16k. Comes standard with serial and
parallel port **£389.00**

JUKI Daisywheel

Juki 6100 **£329.00**

NEW MP26 Daisywheel

MP26 A feature rich very quiet
printer. Universal compatibility with
almost all personal computers at an
unbeatable price. Speed: 26 cps. 132
columns Diablo 630 compatible

£249.00

Optional Tractorfeed **£95.00**

Optional Sheet feeder **£145.00**

MP40

A very fast, quiet printer with
features and compatible with
virtually all computers at a fantastic
price. 40 cps, 132 column, diablo 630
interface, parallel interface, built in
standard RS232 optional **£355.00**

GAKKEN GPR-2000

Print speed of 18 characters per
second. Fully Qume compatible.
Takes Qume exchangeable
Daisywheel and ribbons. Selectable
10,12 & 15 pitch. Supports
proportional spacing. Standard
friction feed. Tractor/cut sheet feeder
and serial interface optional. **£169.00**



How to Order

You can purchase any of the
items listed. All you have to do
is write your requirements on
a sheet of paper, and we will
despatch your goods within 24
hours, subject to availability.
Please add the following
amounts for Postage and
Packing.

Items below £10.00 add **£1.50**

Items below £50.00 add **£2.50**

Items below £100.00 add **£3.50**

Items over £100.00 add **£8.00**

(UK Mainland only)

All prices include VAT at 15%

"No Hidden Extras"

Prices correct at time of going
to press but subject to change
without notice.

Please make cheques payable to:

TWILLSTAR COMPUTERS LTD.

Access/Visa Card Holders:

Welcome. Call now on:-

01-571 5938 or 574 5271

TWILLSTAR COMPUTERS LTD



APEX HOUSE
BLANDFORD ROAD
NORWOOD GREEN
SOUTHALL
MIDD UB2 4HD
☎ 01-574 5271 or
☎ 01-571 5938
Telex: 25247 Telex G.attn TIL
Fax: 01-547 4326

**Steve Turnbull shows
the way to faster
circle drawing**

“I am in the process of learning machine code and would like to draw a circle with a command *CIRCLE. I know how to create new * commands, but could you tell me the machine code for SIN(RAD(radius)) and COS(RAD(radius))?” – Robin Patenall, Egham, Surrey

Ever decreasing circles

STARTING from basics, the simplest way to draw a circle is shown in Program I:

```

10 REM Program I
20 MODE 4
30 OX% = 500
40 OY% = 500
50 R% = 200
60 FOR AX = 0 TO 360
70 X% = R%*SIN(RAD(AX))
80 Y% = R%*COS(RAD(AX))
90 PLOT 69,X%+OX%,Y%+OY%
100 NEXT
    
```

Program I


This is probably the slowest circle drawing technique, short of actually putting in delay loops. It works by calculating the position of a dot on the circumference at a particular angle and then plots that position.

For small circles you don't need to calculate the full 360 degrees, so adding a step function can speed it up:

```

10 REM Program II
20 MODE 4
30 OX% = 500
40 OY% = 500
50 R% = 200
60 S = 60/R%*PI
70 FOR A = 0 TO 360 STEP S
80 X% = R%*SIN(RAD(A))
90 Y% = R%*COS(RAD(A))
100 PLOT 69,X%+OX%,Y%+OY%
110 NEXT
    
```

Program II

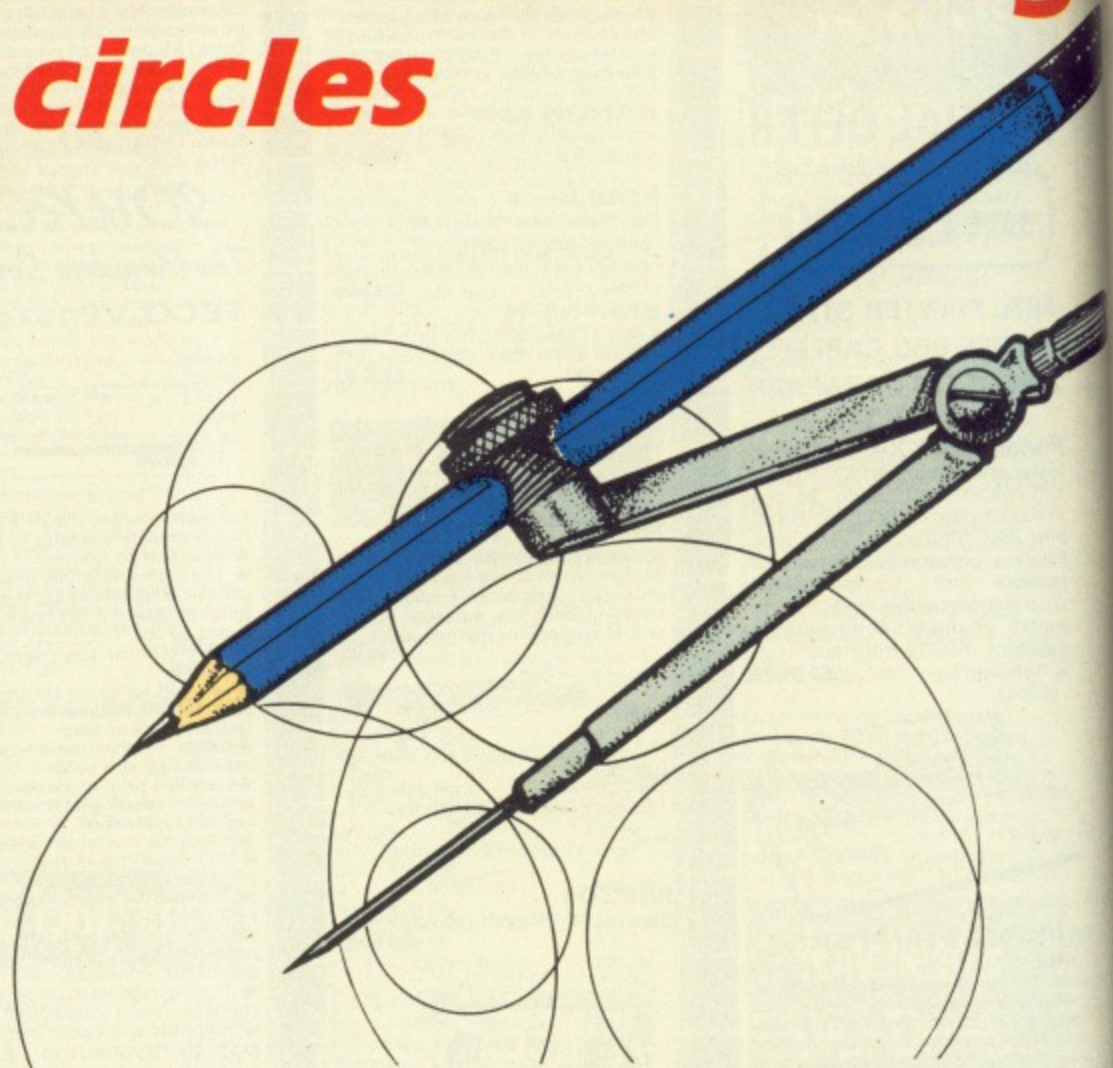

The value of S is calculated so that only the least number of dots needed to form an unbroken circle are plotted, this is slow for large circles and fast for small circles.

The next step in speeding things up involves a bit of a logical jump, and has to do with the fact that circles are symmetrical. Look at Figure 1a. This shows a point on a circle, then Figure 1b shows the mirror image of this position in the X

axis. 1c shows the mirror image in the X and Y axes, and Figure 1d shows the final mirror in both the axes.

Notice that the numbers are the same – it's just the pluses and minuses that differ. This means that if we calculate the X and Y positions of the circumference of a circle for just one quarter of the circle, we can create the other three quarters by mirroring the values. This reduces the amount of work done by 75%. Program III shows this in action

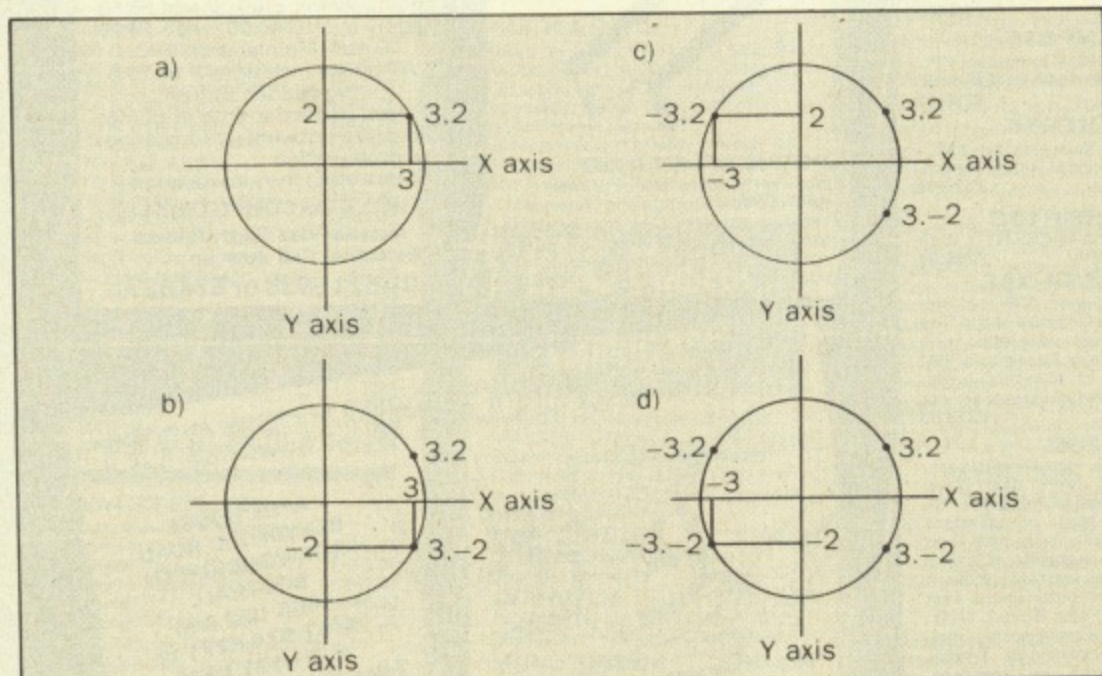


Figure 1: Mirroring X and Y

```

10 REM Program III
20 MODE 4
30 OX% = 500
40 OY% = 500
50 R% = 200
60 S = 60/R%*PI
70 FOR A = 0 TO 90 STEP S
80 X% = R%*SIN(RAD(A))
90 Y% = R%*COS(RAD(A))
100 PROCplot(X%,Y%)
110 PROCplot(-X%,Y%)
120 PROCplot(X%,-Y%)
130 PROCplot(-X%,-Y%)
140 NEXT
150 END
160 DEF PROCplot(X%,Y%)
170 PLOT 69,X%+OX%,Y%+OY%
180 ENDPROC
    
```

Program III

Notice how we only calculate angles from 0 to 90 because this covers the

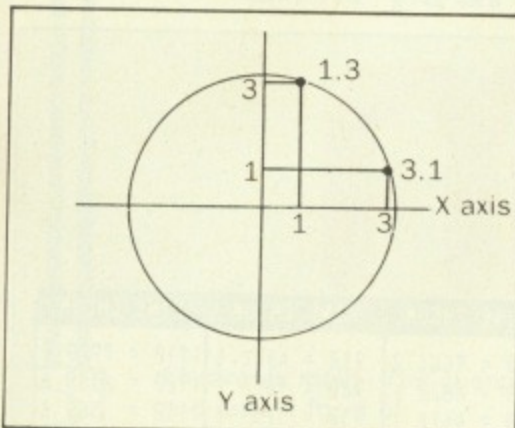


Figure II: Swapping X and Y

quarter of the circle needed.

There is one more speed up that we can do in this way. Figure II shows that apart from just mirroring the X and Y positions, if we also swap the values X becomes Y and Y becomes X. So we can halve the amount of work again:

```

10 REM Program IV
20 MODE 4
30 OX% = 500
40 OY% = 500
50 R% = 200
60 S = 60/R%*PI
70 FOR A = 0 TO 45 STEP S
80 X% = R%*SIN(RAD(A))
90 Y% = R%*COS(RAD(A))
100 PROCplot(X%,Y%)
110 PROCplot(-X%,Y%)
120 PROCplot(X%,-Y%)
130 PROCplot(-X%,-Y%)
140 NEXT
150 END
160 DEF PROCplot(X%,Y%)
170 PLOT 69,X%+OX%,Y%+OY%
180 PLOT 69,Y%+OX%,X%+OY%
190 ENDPROC

```

Program IV

So far I haven't actually answered the question because I'm still using SIN and COS. While it is possible to use trigonometric functions in machine code it is inefficient and unnecessary. It is in fact possible to draw circles without using any trigonometric functions at all.

Program V shows the Basic version of the non-trigonometric circle drawing routine. I don't intend to go into the theory of how it works because it involves complex maths. Enough to say that the variable E% is the key and is calculated to define an error value. This controls whether to change the value of X or the value of Y for the position of the next pixel.

Finally Program VI is a full machine code version of this circle drawing technique that will also produce filled circles if you want them. It takes three parameters, the two coordinates of the centre and the radius.

Each of these must be integer and preferably a multiple of four, as shown in the test routine. The fill/no fill option is selected by having the carry flag clear or

```

10 REM Program V
20 MODE 4
30 OX% = 500
40 OY% = 500
50 R% = 200
60 X% = 0
70 Y% = R%
80 E% = 3-2*Y%
90 REPEAT PROCnext
100 UNTIL X%>Y%:END
110 DEF PROCnext
120 PROCplot(X%,Y%)
130 PROCplot(-X%,Y%)
140 PROCplot(X%,-Y%)
150 PROCplot(-X%,-Y%)
160 IF E%<0 E%=E%+4*X%+6 ELSE E%=E%+4*(X%-Y%)+10:Y%=Y%-4
170 X%=X%+4:ENDPROC
180 DEF PROCplot(X%,Y%)
190 PLOT 69,X%+OX%,Y%+OY%
200 PLOT 69,Y%+OX%,X%+OY%
210 ENDPROC

```

Program V

set on entry to the routine. BBC Basic sets the carry flag to the least significant bit of C%.

So there you have it, I won't pretend the program is simple because it isn't. There are several places where it has been optimised – for instance keeping two copies of variables one of which is multiplied by two for later use – which appears to confuse things.

Its speed is also limited by the fact

that it still uses the PLOT command, rather than accessing the screen directly, but its length would have at least been doubled if direct screen access had been used.

As it stands it provides a good example of circle drawing and with a little work it can be modified into an operating system command.

Turn to Page 70 ▶

```

100 REM Program VI
110 REM by Steve Turnbull
120 REM (c) The Micro User
130 PROCinit:PROCassem
140 MODE 2:PROCTest:END
150 DEF PROCinit
160 oswrch=&FFEE
170 step =4:parms=&600
180 ptr =&70:OX =&72
190 OY =&74:X =&76
200 Y =&78:delta=&7A
210 radis=&7C:plot2=&7E
220 Xx2 =&80:Yx2 =&82
230 DIM code 512:ENDPROC
240 DEF PROCassem
250 FOR LX=0 TO 2 STEP 2
260 P%=code:[OPT LX
270 .circle
280 LDA #69
290 BCC nofill
300 LDA #5
310 .nofill STA plot2
320 LDA parms+1:STA ptr
330 LDA parms+2:STA ptr+1
340 LDY #0:LDA (ptr),Y:STA OX
350 INY:LDA (ptr),Y:STA OX+1
360 LDA parms+4:STA ptr
370 LDA parms+5:STA ptr+1
380 LDY #0:LDA (ptr),Y:STA OY
390 INY:LDA (ptr),Y:STA OY+1
400 LDA parms+7:STA ptr
410 LDA parms+8:STA ptr+1
420 LDY #0:LDA (ptr),Y:STA Y
430 STA radis:STA delta
440 INY:LDA (ptr),Y:STA Y+1
450 STA radis+1:STA delta+1
460 LDA #0:STA X:STA X+1
470 STA Xx2:STA Xx2+1
480 JSR doubleY
490 .main_loop
500 JSR plotXY:JSR swapXY
510 JSR plotXY:JSR swapXY
520 .horiz
530 JSR incX:JSR addXD:JSR incD
540 LDA delta+1:BMI check
550 CMP radis+1:BCC check
560 BNE diag
570 LDA delta:CMP radis
580 BCC check:BEQ check
590 .diag
600 JSR decY:JSR subYD:JSR incD
610 .check
620 LDA Y+1:CMP X+1
630 BCC exit:BNE main_loop
640 LDA Y:CMP X:BCS main_loop
650 .exit RTS
660 .incD CLC
670 LDA delta:ADC #step:STA delta
680 LDA delta+1:ADC #0:STA delta+1
690 RTS
700 .incX CLC
710 LDA X:ADC #step:STA X
720 LDA X+1:ADC #0:STA X+1
730 .doubleX
740 LDA X+1:STA Xx2+1
750 LDA X:ASL A:STA Xx2
760 ROL Xx2+1:RTS
770 .decY SEC
780 LDA Y:SBC #step:STA Y
790 LDA Y+1:SBC #0:STA Y+1
800 .doubleY
810 LDA Y+1:STA Yx2+1
820 LDA Y:ASL A:STA Yx2
830 ROL Yx2+1:RTS
840 .addXD CLC
850 LDA delta:ADC Xx2:STA delta
860 LDA delta+1:ADC Xx2+1
870 STA delta+1:RTS
880 .subYD SEC
890 LDA delta:SBC Yx2:STA delta
900 LDA delta+1:SBC Yx2+1
910 STA delta+1:RTS
920 .plotXY LDA #69:JSR plot
930 JSR negX:LDA plot2:JSR plot
940 JSR negY:LDA #69:JSR plot
950 JSR negX:LDA plot2:JSR plot
960 JMP negY
970 .negX
980 LDA X+1:EOR #&FF:STA X+1
990 LDA X:EOR #&FF:CLC
1000 ADC #1:STA X
1010 LDA X+1:ADC #0:STA X+1:RTS
1020 .negY
1030 LDA Y+1:EOR #&FF:STA Y+1

```

Program VI

◀ From Page 69

```

1040 LDA Y:EOR #&FF:CLC
1050 ADC #1:STA Y
1060 LDA Y+1:ADC #0:STA Y+1:RTS
1070 .plot PHA
1080 LDA #&19:JSR oswrch
1090 PLA:JSR oswrch:CLC
1100 LDA X:ADC OX:PHP
1110 JSR oswrch:PLP
1120 LDA X+1:ADC OX+1:JSR oswrch
1130 CLC:LDA Y:ADC OY:PHP
1140 JSR oswrch:PLP:LDA Y+1
1150 ADC OY+1:JMP oswrch
1160 .swapXY
1170 LDX X:LDY X+1:LDA Y
1180 STA X:LDA Y+1:STA X+1
1190 STX Y:STY Y+1:RTS
1200 J:NEXT:ENDPROC
1210 DEF PROCtest
1220 Z%=RND(-TIME):REPEAT
1230 GCOL RND(3)-1,RND(8)-1
1240 X%=(RND(320)-1)*4
1250 Y%=(RND(256)-1)*4
1260 R%=RND(128)*4
1270 C%=RND(7)<4
1280 CALL circle,X%,Y%,R%
1290 UNTIL FALSE
1300 ENDPROC
    
```




| LINE | CHSUM | LINE | CHSUM | LINE | CHSUM |
|------|----------|------|----------|------|----------|
| 100 | = 00 | 310 | = F4AD B | 510 | = C4C1 7 |
| 110 | = 00 | 320 | = 64D C | 520 | = FB61 F |
| 120 | = 00 | 330 | = B75B 8 | 530 | = B447 F |
| 130 | = 597F F | 340 | = 4C2C E | 540 | = 2F28 F |
| 140 | = 9D65 A | 350 | = 5CD5 C | 550 | = E39 F |
| 150 | = 40D7 1 | 360 | = 7181 4 | 560 | = 534 D |
| 160 | = 78 6 | 370 | = 9EE6 3 | 570 | = 1C2B 4 |
| 170 | = E207 9 | 380 | = 5C0D 9 | 580 | = 8405 C |
| 180 | = 0419 2 | 390 | = 6BE5 8 | 590 | = 759F 2 |
| 190 | = 3078 E | 400 | = 5CC5 3 | 600 | = 2097 E |
| 200 | = 598A 5 | 410 | = B566 5 | 610 | = 6D9B 2 |
| 210 | = CD1B 9 | 420 | = 8C6E 3 | 620 | = 589D D |
| 220 | = 7B0A 1 | 430 | = 98EB 3 | 630 | = AB9 1 |
| 230 | = C4E4 B | 440 | = 5CB0 C | 640 | = D86D 0 |
| 240 | = B623 6 | 450 | = 2C24 8 | 650 | = 2A36 0 |
| 250 | = AAB9 9 | 460 | = A333 F | 660 | = CB8B B |
| 260 | = 7CB8 3 | 470 | = ED8C 8 | 670 | = 7F59 5 |
| 270 | = 6344 2 | 480 | = 1326 A | 680 | = E678 D |
| 280 | = B89E C | 490 | = 9F1B B | 690 | = 9843 D |
| 290 | = B51C A | 500 | = C4C1 D | 700 | = 44FA B |
| 300 | = 5230 8 | | | | |

| LINE | CHSUM | LINE | CHSUM | LINE | CHSUM |
|------|----------|------|----------|------|----------|
| 710 | = 9ECC 2 | 910 | = A5EC E | 1110 | = 7929 3 |
| 720 | = AB22 E | 920 | = 16D6 2 | 1120 | = A388 B |
| 730 | = 46ED 7 | 930 | = 1FD3 D | 1130 | = 369 6 |
| 740 | = B24C 1 | 940 | = 22A5 F | 1140 | = 28EF B |
| 750 | = 8C66 1 | 950 | = 1FD3 7 | 1150 | = 609F C |
| 760 | = B864 C | 960 | = FA18 4 | 1160 | = 16F4 B |
| 770 | = A1B 9 | 970 | = 54F 1 | 1170 | = 7F5E C |
| 780 | = 963B 8 | 980 | = 1275 5 | 1180 | = 57A7 8 |
| 790 | = 037D D | 990 | = 3799 A | 1190 | = 3A42 0 |
| 800 | = 56DC 9 | 1000 | = E75D F | 1200 | = 953B B |
| 810 | = 5D7E A | 1010 | = C0CE B | 1210 | = 7EBF 8 |
| 820 | = 15AA 5 | 1020 | = 156E 4 | 1220 | = 742F 0 |
| 830 | = 5347 4 | 1030 | = D574 B | 1230 | = 1BF9 D |
| 840 | = 45FB 1 | 1040 | = 34EC D | 1240 | = E0B9 5 |
| 850 | = 181B 6 | 1050 | = F77C F | 1250 | = C35B C |
| 860 | = F719 0 | 1060 | = 1577 B | 1260 | = 62A2 5 |
| 870 | = A5EC 5 | 1070 | = 3E6D B | 1270 | = 9EA5 6 |
| 880 | = B77B 1 | 1080 | = 84CA B | 1280 | = 3EB3 A |
| 890 | = A206 5 | 1090 | = 69BA 6 | 1290 | = 226C 2 |
| 900 | = 481A E | 1100 | = 2F9A F | 1300 | = ED0F F |

Oasis Instruments

OASIS VIRTUAL INSTRUMENT SYSTEM

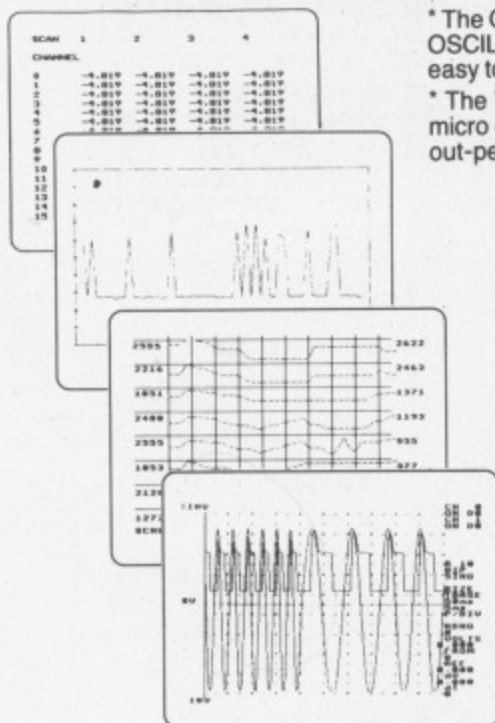

* The OASIS Virtual Instrument System (VIS) emulates conventional DVM, OSCILLOSCOPE, CHART RECORDER, X/Y PLOTTER and DATA LOGGER in one easy to use package and also provides sophisticated data analysis tools.

* The VIS data acquisition module and instrument emulation software turns the BBC micro directly into a versatile and flexible laboratory measurement system which can out-perform and is easier to implement than IEEE 488 linked systems.

* VIS professional, ready-to-use instrument emulations include:
Multi-channel DVM with real time numeric and graphic displays, storage SCOPE with on-screen measurement and waveform zoom, DATA LOGGER with logged data compression algorithm and X/Y PLOTTER with programmable integration periods.

HARDWARE

VIS is based on a precision computer controlled 16 channel A-D converter, with six programmable ranges and read rates of 50k samples per second at 8 bit resolution, 25k at 12 bit.

This simply installed unit has proven long term stability and reliability.

SOFTWARE

The menu-driven acquisition, analysis and display programs combine on screen set up of measurement parameters, SPREADSHEET data manipulation and a range of data display formats, including 8 trace CHART RECORDER and oscillogram.

Total data mobility from measured information to memory, disk, screen and HARD COPY output.

The OASIS VIS carries full documentation to allow the beginner or professional programmer to create new interface applications or personalised instrument emulations.

PRICE

At £399 (ex VAT), the price of the complete VIS system is less than any one of the instruments it replaces. Performance enhanced versions also available, e.g. higher acquisition speeds.

For fast delivery, phone your order on 0603 747887. Technical queries answered and requests for further data on this number.

The Street, Old Costessey, Norwich NR8 5DF.
Tel: 0603 747887

Design Consultancy

Link your BBC Micro to the outside world with...

MicroLink



Electronic mail – The cheapest and fastest form of communication possible. It costs the same to send a message to one mailbox as to 500!



Telex – Link up with 96,000 telex subscribers in the UK and 1.5 million worldwide. You can even send and receive telexes after office hours or while travelling.



Telemessages – Type in your message before 8pm and delivery is guaranteed by first post the next day (except Sunday), anywhere in the UK and USA.




Tele-booking – Reserve train and theatre tickets, check flight details worldwide, or order from a vast range of products – from flowers to floppy discs.



Telesoftware – Download directly into your BBC Micro any program from the ever-growing library now available on MicroLink – games, educational and utilities.



Company searches – Obtain facts about any British limited company in seconds, and fully analysed financial information on over 100,000 major companies.



Typesetting – Send copy from your word processor together with details of type size and style, and you'll receive pages ready for printing within 24 hours.



News – Use the powerful search commands to pinpoint vital business information from the world's leading news services, newspapers and periodicals.




Radiopaging – If you also have a pocket radiopager you'll be alerted each time an urgent message arrives in your mailbox. So you're always in touch.



Gateways – Get through to New York in just five seconds – or key into the EEC computer in Luxembourg, which links you to 600 databases throughout Europe.

When you join MicroLink you've got the world of communications at your fingertips – 24 hours a day. You'll have immediate access to ALL the facilities offered by Telecom Gold ... and a great deal more besides.

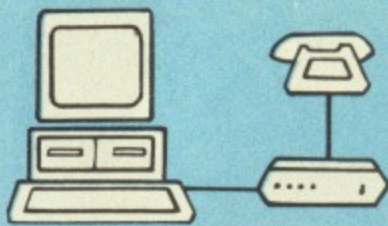


All you need – apart from your BBC Micro – is a modem, which plugs into your telephone wall socket, plus suitable communications software.

We have provided a list of possible combinations below, ranging from the very cheapest to ones which can automatically dial the MicroLink telephone number and connect you to the service – all you have to do is type in your personal security password.

Whichever equipment you use, you will be able to call MicroLink, open your mailbox, save to disc any messages waiting for you, and disconnect in as little as two minutes.

Typical comms packages

| | |
|----------|--|
| A | <i>Watford: Apollo V21, V23 auto-dial, auto-answer modem + Comms rom (£82.25)</i> |
| B | <i>Dataphone: Demon V21, V23 auto-dial, auto-answer modem + Z-ROM + Disc-Connect software (£96.49)</i> |
| C | <i>Pace: Nightingale V21, V23 manual dial modem + Commstar II rom (£98.90)</i> |
| D | <i>Beebug: V21, V23 auto-dial, auto-answer modem + Comms rom (£103.99)</i> |
| E | <i>Miracle: WS4000 V21, V23 auto-dial, auto-answer modem + Dialup (£285.39)</i> |



More than 90 per cent of subscribers can connect to the MicroLink computer at local call rates.

TO FIND OUT MORE
Fill in the coupon and send it to the address below. You will receive full details of services and costs, together with an application form. Complete this and within days you and your BBC Micro will be able to use all the services of MicroLink and Telecom Gold.

Please send me full details about MicroLink, and information sheets about the following hardware and software options (please circle):

A B C D E

Name _____

Address _____

Postcode _____

Send to: MicroLink, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

MU11

CRAZEE RIDER

ENHANCED MASTER SERIES
 ● Extra Race Circuits
 ● Haunting Music
 ● Extra Graphics
 ● Auto-Demo Mode
 ● Extra Game Features



A PROGRAMMING BREAKTHROUGH
 The first Electron motor racing game to faithfully represent the bends and chicanes of major international racetracks.



Setting the Scene



Going round the bend at Misano (BBC MICRO VERSION)



Knocking off an opposing rider (BBC MICRO VERSION)



Clever Electron programming techniques (ACORN ELECTRON VERSION)

If you can't beat them, knock them off!

Howling round the bends at Le Mans at 150 m.p.h. is a daunting experience. You'll need nerves of steel and slick reflexes to finish in the Top 6 and qualify for the next race. If, at first, you can't make the grade you can always let off steam (and gain bonus points) by bumping into the other riders and knocking them off their bikes; listen for the terrified wail as the rider is sent flying to the ground.

Each race has 60 participants — and the further you get, the tougher the competition becomes. Bonus points are awarded for a good finishing position, and your "hit-count" shown at the top of the screen records the number of other riders you have sent tumbling from their steeds.

Seven top international racetracks are featured:-

- Le Mans (France)
- Anderstorp (Sweden)
- Paul Ricard (France)
- Brands Hatch (U.K.)
- Misano (Italy)
- Silverstone (U.K.)
- Nurburgring (W. Germany)

An enhanced version has been specially produced for owners of the BBC Master Series computers. Included free with all BBC Micro cassettes and discs, this version features several extra race circuits, a beautiful 6-minute musical soundtrack, and a host of extra game features — making full use of the Master's extra memory and capabilities.



| | | | |
|--------------------------------------|--------|----------------------------------|--------|
| BBC Micro Cassette | £9.95 | Acorn Electron Cassette ... | £9.95 |
| BBC Micro 5 1/4" Disc | £11.95 | Acorn Electron 3 1/2" Disc | £14.95 |
| BBC Master Compact 3 1/2" Disc | £14.95 | | |

(Compatible with the BBC B, B+ and Master Series computers).

PRIZE COMPETITION

A superb MZ Simson sports moped (illustrated above) worth £500 is the first prize in our competition.

To enter the competition, you must finish in qualifying position on the first 21 racetracks, and note down the congratulatory messages you receive.

Closing Date: 31st March, 1988.

SUPERIOR SOFTWARE Limited
ACORNSOFT
 Dept. CR3, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453

Please make all cheques payable to "Superior Software Ltd".



24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately. (This does not affect your statutory rights.)

Archimedes fits DES guidelines

NEW Government guidelines on the future of information technology in schools have virtually become an endorsement of the Archimedes.

Though this advice to local authorities does state that no micro is known that could meet all its recommendations, it puts forward several requirements which can only be satisfied at present by the new wonder machine.

The first three "principles underlying recommendations" are that future hardware should provide a substantial potential for software portability, should offer a high degree of compatibility with schools' existing software and expertise, and that systems in schools should provide compatibility with commercial software systems in this and other countries.

In its guidance on purchase of systems, the report suggests: "LEAs will wish to give particular attention to the need to purchase microcomputer systems which will run as substantial a proportion as possible of their existing educational software, as well as offering the potential to run programs in internationally standardised languages". Most educational software is BBC Micro based and will run on the Archimedes.

It goes on: "At present, with only on average two micros per primary school and a corresponding figure of 14 for secondary schools, machines limited to one or two specific applications are in general not going to meet the main requirements or to show maximum return on investment.

"There will continue therefore to be a premium on machines which have built-in versatility to enable them to be capable of being used for the wide and growing range of applications across the curriculum".

All of which, along with an expandability index, points to the wide use of Archimedes in educational establishments.

This is reinforced by the report's comment: "It is not suggested that schools should necessarily buy IBM compatible computers. Indeed to do so may not be consistent with some or other recommendations".


The report follows the Government's announcement that it proposes to make Education Support Grants (ESG) avail-

able towards information technology in schools.

The central aim of the strategy is to harness the potential of IT for enhancing the quality of teaching and learning across the curriculum and to extend that benefit as widely as possible.

In addition to the salaries of advisory teachers, the proposed ESGD will make available some £8.5 million in 1988/89 for buying micros, in order to improve computer-pupil ratios.

"The Government is anxious to maintain the coherence in hardware and software standards. Authorities will be asked to show how they have taken account of the recommendations in arriving at a decision on the hardware they are proposing to purchase", the report points out.

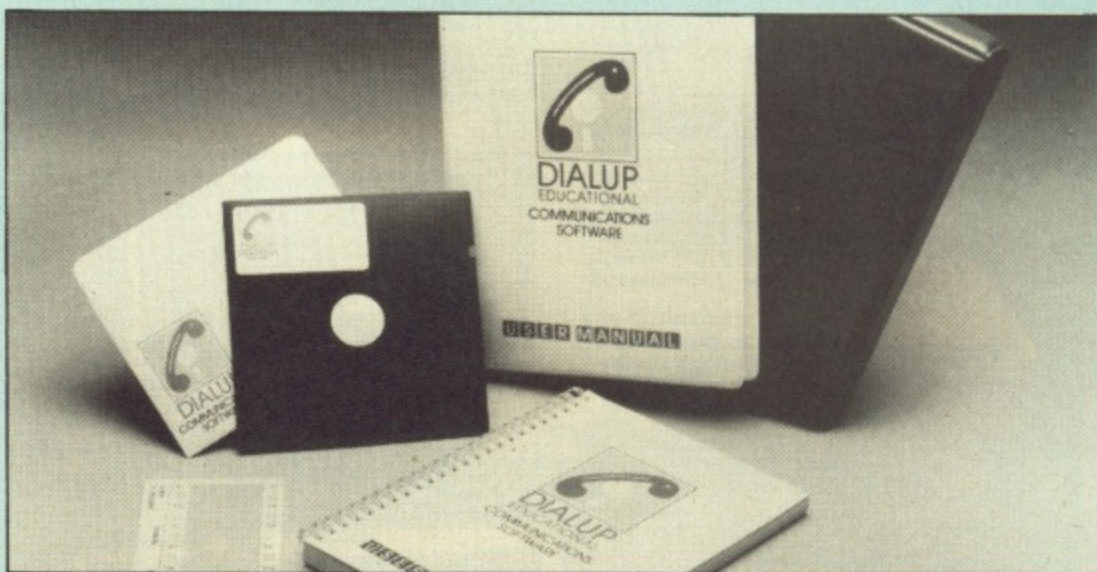

Comms pack price drops

THE communications software package, Dialup Education, has been reduced in price by £30 to £59.95.

Designed by PMS Communications (021-643 7688) for the education market, the package has a special TTNS emulation which is needed to access the

Times Network for Schools, plus viewdata and TTY emulation.

PMS say that the package is capable of accessing the majority of educational services and databases including Prestel education, Neris, Epnidesk, TTNS, MicroLink and Telecom Gold.



Sax Appeal – St. Joseph's pupils with synthesiser and BBC Micro

Synthesisers in class

PUPILS at St Joseph's College in Stoke on Trent are using a BBC Micro and synthesisers alongside conventional instruments in their music lessons.

Seven inch vinyl pop discs that they are used to buying in order to get their favourite groups into the charts have given way to the 5.25in floppy disc for music of a completely different kind.

The computer is proving even more popular with the students than the triangle and drum kit because of the variety of sounds that it can produce. One project has been to program the computer to play a note perfect, harpsichord style Bach minuet backing track which was then added to a live saxophone performance to provide the music for a school concert.

The GCSE music students regularly use computers, multi track tapes and synthesisers as part of their course work. Music teacher Martin Walley said: "Using the computer to play music is helping to generate a lot of enthusiasm from the students".

Getting their teeth into it


THE BBC Micro and Wordwise Plus are being used by dental students at the University of Edinburgh to help chart their patient's teeth.

Students are using the system where reports include a chart of the patient's teeth stating which were present on examination, which were missing or unerupted and where gaps due to

missing teeth had become closed.

Extensive use has been made of the segments and programming ability of Wordwise Plus to provide on screen prompts to which the student responds.

Once the information has been entered a printout can be produced or the details merged with text to produce a final report.

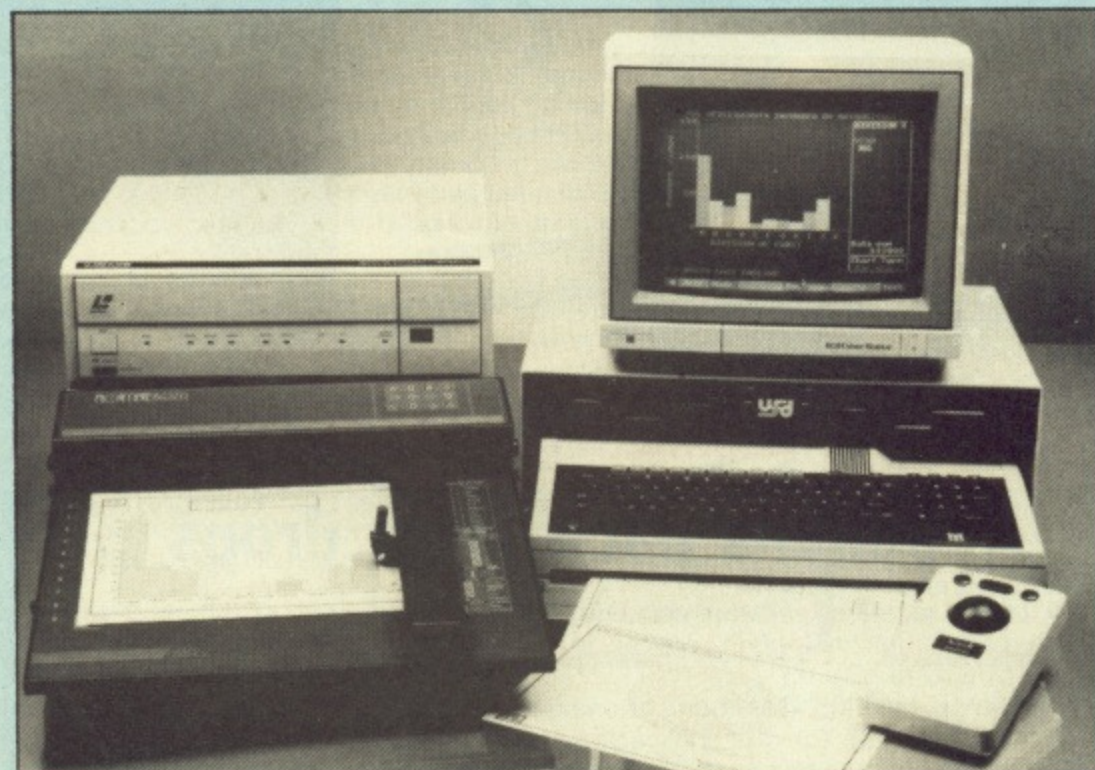

The equipment used by the Edinburgh dental students

Library database

SCHOOLS that are having problems with trying to computerise their library may just benefit from a new program by John O'Brien of Manchester.

The program appeared following a letter in the September issue of *The Micro User* from Alan Turner who requested details of a database that would be suitable for a school library. His requirements were for a program that would run on a BBC Micro and was capable of storing details of 15,000 books and 1,400 pupils.

Mr O'Brien's Micro Librarian program runs on a BBC Master 128 with twin 80 track drives and can store details of 12,000 books and details of up to 2000 pupils. The data fields are title, author, Dewey/ISBN, number of times the book has been borrowed, the name of the borrower and the date.

A form list can be printed out which would show teachers of each class which of their pupils has a book that is overdrawn. The program also contains a search and browse facility. One other

p&h

p&h electronics Ltd

5 THE PARADE · YATELEY
HANTS
TEL: 0252 877222

24 HR SALES LINE
0252 878107

22/24 GUILDFORD ROAD
BAGSHOT · SURREY
TEL: BAGSHOT 0276 74533

Acorn Systems/Upgrades

| | |
|-----------------------------|-------------------------------|
| Master 128K | £435.00 |
| Master Turbo Upgrade | £115.00 |
| Master 512 Upgrade | £200.00 |
| Master Eprom Cartridge | £14.00 |
| Compact with TV Modulator | £395.00 |
| Compact with Mono Monitor | £435.00 |
| Compact with Colour Monitor | £599.00 |
| Compact 2nd 3.5" drive | £110.00 |
| 1770 Disk Upgrade Kit | £46.00 |
| A305 Basic | £918.85 |
| Mono | £976.35 |
| Colour | Special Price £1080.00 |
| A310 Basic | £1006.25 |
| Mono | £1063.75 |
| Colour | £1236.25 |
| A410 Basic | £1808.85 |
| Mono | £1723.85 |
| Colour | £1838.85 |
| A440 Basic | £2643.85 |
| Mono | £2701.35 |
| Colour | £2873.85 |

Printers

| | |
|-----------------------------------|---------|
| Panasonic KXP 1081 | £179.00 |
| Citizen 120D + Parallel Interface | £199.00 |
| Epson LX800 NEW | £270.00 |
| Panasonic KXP1082 | £250.00 |
| Printer Lead (Centronics) | £12.00 |

Amstrad Systems DISCOUNT WITH SERVICE

| | EX VAT | INC VAT |
|---------------------------------|---------|----------|
| PCW8256 | £285.00 | £327.75 |
| PCW9512 - New | £465.00 | £534.75 |
| PC1512 SDMM + Ability + 4 Games | £399.00 | £458.85 |
| PC1512 SDCM + Ability + 4 Games | £515.00 | £592.25 |
| PC1512 DDMM + Ability + 4 Games | £475.00 | £546.25 |
| PC1512 DDCM + Ability + 4 Games | £610.00 | £701.50 |
| PC1640 SDMM | £470.00 | £540.50 |
| PC1640 DDMM | £555.00 | £638.25 |
| PC1640 SDCM | £610.00 | £701.50 |
| PC1640 DDCM | £690.00 | £793.50 |
| PC1640 HD20MM | £840.00 | £966.00 |
| PC1640 HD20CM | £980.00 | £1127.00 |

Computer Books

| | |
|-------------------------------------|--------|
| 15 Hour Word Proc Use BBC View | £5.95 |
| 30 Hour BASIC Standard Ed. | £7.95 |
| 40 Best Mach Code Routine BBC | £7.95 |
| 6502 Develop Pack (6502 2nd Pro) | £7.50 |
| Advanced BASIC ROM For the BBC | £9.95 |
| Advanced Disk User Guide | £16.95 |
| Advanced Graphics with the BBC | £9.95 |
| Advanced User Guide (BBC) | £15.95 |
| Advanced User Guide - Binder | £3.91 |
| Applied Assembly Language BBC | £9.95 |
| Assembly Language Prog for the BBC | £8.95 |
| BASIC ROM User Guide (BBC/Electron) | £11.95 |
| BBC B Compendium | £5.95 |
| BBC Master 128/ High Flyers | £10.95 |
| BBC Micro Advanced Programming | £9.95 |
| BBC Micro Disk Companion | £8.95 |
| BCPL The Language & Compiler | £7.50 |
| Beginners Guide Word Proc BBC | £7.95 |
| Complete Disc Manual - BB | £7.95 |
| Creative Assembler BBC/Electron | £5.95 |
| Disk Programming Tech for BBC | £10.95 |
| File Handling on BBC Micro | £6.95 |
| Interfacing & Robotics on BBC | £15.95 |
| Interfacing your BBC Micro | £8.95 |
| Introducing CP/M-2nd Processor | £9.95 |
| Making Most Your BBC Disc system | £5.95 |
| Mastering Assembly Code BBC | £8.95 |
| Mastering Music BBC | £6.95 |
| Mastering the Disc Drive | £7.95 |
| Structured Basic | £7.25 |
| The BBC Micro Rom Book | £10.95 |
| Within The BBC Microcomputer | £13.95 |
| Wordwise Plus | £9.95 |
| Practical Disc File Techniques | £5.95 |
| 6502 Applications | £13.95 |
| 6502 Assembly Lang Subroutines | £19.95 |
| 6502 Reference Guide | £9.95 |
| Programming the 6502 | £16.95 |
| 6502 Ass Lang Prog 2nd Ed. | £19.95 |

Roms/Utilities

| | | |
|-------------------------------|------------|--------|
| Intersheet | Rom | £50.00 |
| Interword | Rom | £49.00 |
| Interchart | Rom | £34.00 |
| Printmaster | Rom | £26.00 |
| Vine Replay (State Disc I/F) | Rom | £33.00 |
| Master Replay (NEW) | | £38.00 |
| Island Logic Music Cassette 1 | Cassette 2 | £13.50 |
| Island Logic Music | Disc | £27.00 |
| Fleet Street Editor | Disc | £38.00 |
| Spell master (NEW) | | £53.00 |

Compact Software on 3.5" Disc

| | |
|-----------------------------|--------|
| Micropower Magic 10 | £8.50 |
| Acornsoft Hits Vol 1 | £13.50 |
| Acornsoft Hits Vol 2 | £13.50 |
| Best for Language | £18.00 |
| Best for Maths | £18.00 |
| Beta Base | £24.50 |
| Care Disc | £22.50 |
| Citadel | £13.50 |
| Commonwealth Games | £10.50 |
| Compilation One | £18.00 |
| Compilation Two | £18.00 |
| Elite | £18.00 |
| Galaforce | £13.50 |
| Games Disc | £13.50 |
| Games Disc 1 | £11.50 |
| Games Disc 2 | £11.50 |
| Karate Combat | £13.50 |
| Repton 2 | £13.50 |
| Repton 3 | £13.50 |
| Revs 4 Tracks | £18.00 |
| Speech | £13.50 |
| Steve Davis Snooker | £11.50 |
| Strykers Run | £13.50 |
| US Drag Racing | £10.50 |
| Viewsheet | £52.00 |
| Vindaloo | £10.50 |
| Winter Olympics | £10.50 |
| Superior Collection 1 | £13.50 |
| Superior Collection 2 | £13.50 |
| Grand Prix Construction Set | £13.50 |
| Repton Around the World | £9.00 |
| Codename Droid | £13.50 |
| Crazee Rider | £14.50 |
| Smileys People | £13.50 |
| Palace of Magic | £13.50 |

Acornsoft Books

| | |
|--------------------------------|--------|
| Graphs and Charts | £7.50 |
| Comal Manual | £10.00 |
| BCPL Manual | £15.00 |
| ISO Pascal Manual | £10.00 |
| View Guide | £10.00 |
| Viewsheet Guide | £10.00 |
| Viewstore Manual | £10.00 |
| Master Reference Manual Part 1 | £14.95 |
| Master Reference Manual Part 2 | £14.95 |
| Logo Manual | £7.50 |
| Microtext Manual | £10.00 |
| BBC User Guide | £12.95 |
| Into View 2.1 | £5.00 |
| Micro Prolog | £10.00 |
| Turtle Graphics | £7.50 |
| Creative Sound | £9.95 |

Accessories

| | |
|---|---------|
| Data Recorder | £29.00 |
| Data Recorder - BBC Lead | £4.00 |
| Full Proportional Joy Stick | £12.50 |
| Full Proportional Joy Stick Pair | £20.00 |
| Voltmace 14b Joystick | £14.50 |
| Modem Nightingale with Commstar | £149.00 |
| Modem Auto Answer Board + Software | £75.00 |
| Sideways ROM Board (APTL) | £43.00 |
| 5.25in Discs 10 in Library Case DS/DD 96tpi | £16.00 |
| TV Aerial/Computer Switch | £2.50 |
| Function Key Mask | £3.00 |
| Computer Covers Soft | £5.50 |
| Printer Covers - State type | £6.50 |
| Disc Drive Covers - State type | £5.00 |
| Digital Mouse (by NIDD) with grafik | £35.00 |
| Digital Mouse (by NIDD) with artroom | £54.00 |

Acornsoft View

| | |
|-------------------------------------|-----------------------|
| View - Wordprocessor ROM | £45.00 |
| View 3 inc. Printer Drivers | £70.00 |
| Viewsheet - Spreadsheet ROM | £45.00 |
| ViewStore - Database ROM | £45.00 |
| Viewspell | £32.00 |
| Viewplot | £23.00 |
| Printer Driver Generator - Cassette | £9.00 |
| View Professional (NEW) | Disc £10.00 £90.00 |

Cumana Disc Drives

(The best and Beab approved) See our low prices

| | |
|---|---------|
| CSX100 100K 40T | £105.00 |
| CSX400/S 400K D/S 40/80T Switchable | £140.00 |
| CS100 100K 40T With Power supply | £135.00 |
| CS400/S 400K D/S 40/80 With Power supply | £165.00 |
| CDX800/S Dual 400K 40/80 Switchable | £260.00 |
| CD800/S Dual 400K 40/80 With Power supply | £315.00 |

Top Games

| | | |
|-----------------------------|-------------|-------------|
| Elite | Cass £11.50 | Disc £13.50 |
| Revs | Cass £11.50 | Disc £13.50 |
| Repton 3 | Cass £9.50 | Disc £10.50 |
| Airwolf | Cass £9.50 | Disc £14.00 |
| Scrabble | Cass £12.50 | Disc £17.00 |
| Monopoly | Cass £12.50 | Disc £14.50 |
| Ravenskull | £8.50 | Disc £10.50 |
| Aviator | Cass £13.50 | Disc £16.50 |
| Strykers Run | Cass £8.50 | Disc £10.50 |
| Superior Collection I | Cass £8.50 | Disc £10.50 |
| Superior Collection II | Cass £8.50 | Disc £10.50 |
| Starquake | Cass £7.50 | Disc £10.50 |
| XOR | Cass £9.00 | Disc £11.50 |
| Grand Prix Construction Set | Cass £9.00 | Disc £10.50 |
| Colossus Chess | Cass £9.00 | Disc £13.50 |
| Crystal Castles | Cass £9.00 | Disc £13.50 |
| Imogen | Cass £8.50 | Disc £ 9.50 |
| Cholo | | Disc £16.50 |
| Don Junz | Cass £2.99 | Disc £7.95 |
| Paper Boy | Cass £9.50 | Disc £14.50 |
| Round Heads | Disc Only | £12.95 |
| Phantom | Cass £7.50 | Disc £12.00 |
| Repton Around the World | Cass £6.50 | Disc £7.50 |
| Codename Droid | Cass £9.00 | Disc £10.50 |
| Crazee Rider | Cass £9.00 | Disc £11.50 |
| Arkanoid | Cass £9.00 | Disc £11.50 |
| Smileys People | £9.00 | £13.50 |
| Graham Gooch Test Cricket | £9.00 | £11.00 |
| Palace of Magic | £9.00 | £11.00 |
| Five Star Games II | £9.00 | |
| Geoff Capes Strong Man | £2.50 | |
| Hercules | £2.50 | |

AMX Mouse Products

(Please state - B, B+, Master 128, Compact)

| | |
|-----------------------------|--------|
| New Mouse III with Superart | £75.00 |
| Picture Gallery | £22.00 |
| Stop Press | £45.00 |
| Superart only | £45.00 |
| Max | £18.00 |
| Pagemaker | £45.00 |
| Extra Extra | £22.00 |
| Design Cad | £63.00 |
| 3D Zicon | £22.00 |
| Xam | £22.00 |
| Mind Games | £13.50 |
| Paint Pot | £13.50 |
| Desk | £22.00 |
| Mouse Mat | £5.00 |

Monitors

| | |
|--|---------|
| Philips BM7502 Green High Res | £79.00 |
| Philips BM7522 Amber High Res | £85.00 |
| Philips BM 7542 White High Res | £85.00 |
| Philips swivel stand for above | £9.00 |
| Philips CM8833 RGB + Mono + Sound (NEW) | £280.00 |
| Microvitec 1431 Colour std res | £225.00 |
| Microvitec 1451 Colour med res | £270.00 |
| CTV/MONITORS | |
| Ferguson MC05 14" CTV + RGB | £195.00 |
| Monitor to Master/BBC/Compact lead to suit | £4.50 |
| Sanyo 14" CTV + AGB | £190.00 |

MAIL ORDER COUPON

P&H ELECTRONICS LIMITED

22/24 GUILDFORD ROAD · BAGSHOT · SURREY GU19 5JN

Please send me: (or order by letter)

1 _____ at £ _____ P&P _____
 2 _____ at £ _____ P&P _____
 3 _____ at £ _____ P&P _____

I enclose cheque/PO for £ _____

Or please debit my Access/Barclaycard/Visa* (delete as applicable)

Card Number _____ Expiry Date _____ Telephone _____

FAST VAT FREE EXPORT SERVICE ON ORDERS OVER £15 NETT
PLEASE ALLOW FOR CARRIAGE COSTS OR REQUEST CARRIAGE QUOTATION

CARRIAGE COSTS - Micros - Monitors - Printers: £7.00

Disc Drives - Data Recorders: £5.00

Accessories - £2.00 per item

SOFTWARE - GAMES - BOOKS CARRIAGE FREE UK

ACCESS/BARCLAYCARD/VISA ORDERS WELCOME

CREDIT FACILITIES Instant credit up to £1,000, deposit 10% FOR CALLERS ONLY

Name _____
 Address _____

PINEAPPLE SOFTWARE

Programs for the BBC model B, B+, Master and Master Compact with disc drive

DIAGRAM II

SUMMARY of DIAGRAM II FEATURES

Diagram II represents a major breakthrough in the techniques used for drawing software on the BBC micro. It works on a completely different principle to other drawing software by storing the drawing information straight to disc as coded 8x8 pixel blocks.

This technique has three major advantages. First, the size of the diagram is only limited by the amount of space on disc. Second, there is no limit to the amount of information which can be stored on a given diagram as the information is stored on disc and not in computer memory. Third, the disc storage technique allows the smooth scrolling of the screen over the whole surface of the diagram.

For people not familiar with Diagram, the basic operation of the program is to first display any part of the diagram, either by quoting an index name or screen number. At this point you are free to scroll the diagram around the screen using either cursor keys, trackball or mouse. You may stop scrolling at any point and enter the edit mode which allows you to modify or add new information to the diagram. When you have finished making alterations, the new information is stored to disc and you are free to scroll elsewhere on the diagram stopping to edit at any time.

The edit features are now very comprehensive. Text may be typed straight from the keyboard, and if other fonts are stored as user defined characters then these fonts may be printed using the normal keyboard keys.

The print routines are now completely 'scaleable' with both the horizontal and vertical scales being totally variable in 1% steps between a size that will give 18 mode 0 screens on an A4 sheet and a size that would print just one pixel on a sheet! The routines are adaptable to most types of dot matrix printer and full advantage may be made of wide carriage printers. The printouts may be rotated through 90 deg. if required.

The new editing features make DIAGRAM II suitable for all types of serious drawing application including scale drawings, flow charts, architectural, family trees, and many other subjects as well as circuit and schematic diagrams. As an example of what Diagram II can do, this complete advertisement (with the exception of the PCB drawing) has been produced with the package.

1. Works on any model BBC computer with either DFS or ADFS. (ADFS only if Shadow memory available).
2. Will automatically take advantage of shadow memory (any make) to provide more User Definable Characters, 880 with Shadow, 381 without Shadow.
3. Rapid horizontal and vertical line drawing routine with automatic joins for circuit diagrams.
4. Full rubber band line drawing and circle drawing modes.
5. Takes advantage of the Acorn GXR rom to provide drawing of arcs, sectors, chords, parallelograms, ellipses, and flood filling. Note this rom is already fitted to Master and Compact machines.
6. Pixel cursor drawing and deleting mode allows very fine detail to be added.
7. Defined areas of screen may be moved, copied, deleted or saved to disc.
8. On-screen indication of cursor position shows either the cursor position on the overall diagram or the distance from a preset point.
9. Keyboard keys may be predefined to print User Defined Characters, enabling new character sets to be stored as user defined characters and then printed straight to the screen using the keyboard keys.
10. Wordprocessor files may be loaded to the screen and automatically formatted into any shape screen area.
11. Index names may be set up to point to given areas of a large diagram, to enable rapid access to a given point on a diagram.
12. Fully compatible with Marconi trackball and most makes of mouse.
13. All Diagram 'Utilities' are included, enabling screen ident numbers and borders to be added, and any area of diagram to be moved or copied. The whole diagram may be displayed in reduced scale (either 4x4 or 8x8 format) on a single screen, and the size of the overall diagram may be increased or decreased.
14. Completely scaleable print routines allow any area of the diagram to be printed either horizontally or through 90 deg. in scales that may be varied in 1% steps allowing up to 18 mode 0 screens to be printed on an A4 sheet (still with readable text).
15. Complete with 40 page easy to understand handbook.

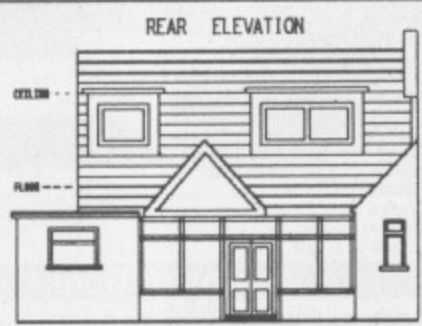
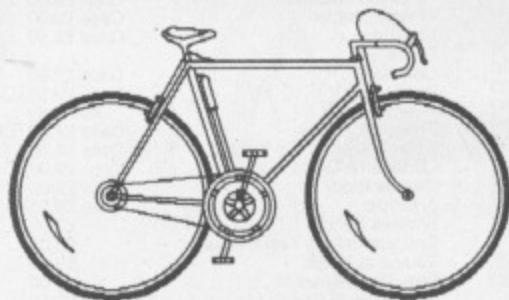


Diagram II consists of a set of disc files and a 16k Eprom. The disc supplied is formatted in 40T on side 0 and 80T on side 2. Please state if this is unsuitable for your system, or if you require a 3.5" Master Compact disc.

DIAGRAM II - £ 55.00 + vat

P & P free (except overseas)

N.B. Upgrades are available to existing Diagram owners. Please contact Pineapple if you have not received an upgrade letter.

PCB

Pineapple's now famous printed circuit board draughting aid produces complex double sided PCB's very rapidly using any model BBC micro and any FX compatible dot-matrix printer.


The program is supplied on Eprom and up to 500 component and 500 ASCII component descriptions may be stored for each PCB. There is no limit to the number of tracks that may be stored for a given PCB although the maximum board size is restricted to 8" x 5.6".

Using a mode 1 screen, tracks on the top side of the board are shown in red, while those on the underside are blue. Each side of the board may be shown individually or superimposed. A component placement screen allows component outlines to be drawn for silk screen purposes and component numbers and outlines entered on this screen may be displayed during track routing to aid identification of roundels.

The print routines allow separate printouts of each side of the PCB in a very accurate expanded definition 1:1 or 2:1 scale enabling direct contact printing to be used on resist covered copper clad board. The print routines are very fast taking typically 5 minutes for a 1:1 print of a 7" x 5" board.

This program has too many superb features to describe adequately here, so please write or phone for more information and sample printouts.

PRICE £ 85.00 + vat

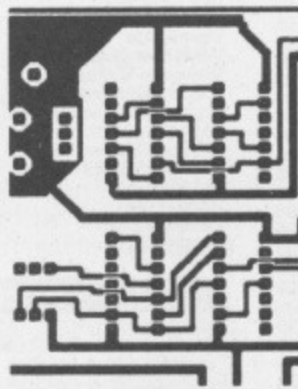

A new addition to the PCB software is the PCB plotter driver program. This enables files produced by PCB to be used in conjunction with most types of plotter to produce plotted output rather than the normal dot-matrix printer output.

In this way plots may be produced directly onto film or even directly onto copper board with an etch resistant pen if a suitable plotter is available. The program is suitable for use with most makes of plotter including Hewlett Packard, Hitachi and Plotmate M. The program can also be configured to work with other plotters by entering suitable plotter instructions.

All the features of the printer driver are included, such as the automatic thinning down of tracks between roundels. Mirror image plots are also available.

PRICE £ 35.00 + vat

MARCONI TRACKERBALL

This high quality device comes in three versions. Version one is for the standard BBC micro and comes with the Icon Artmaster drawing package from Micro-Draw, and Trackerball Utilities which allow the trackerball to be used with other software.

Version two is for the Master 128 computer and this comes with the Pointer Rom. This is a Rom which allows the Master to be configured for use with the Trackerball and has commands to enable the Trackerball to intercept the cursor key or joystick routines of other software. Commands are also available to reverse the axes of the trackerball and set the sensitivity. The three buttons may also be set up to produce any ASCII code.

Version three is simply the bare Trackerball which comes without software but is suitable for use with specially written software such as Diagram or Diagram II.

Trackerball adapters are also available which plug onto the end of the cable and convert the connections of the trackerball to be the same as a mouse. This enables the trackerball to drive all types of 'mouse' software.

| | |
|--|---------------|
| For Model 'B' and B+ (with Icon Artmaster) | £ 60.00 + vat |
| For Master 128 (with Pointer Rom) | £ 60.00 + vat |
| Bare Trackerball (no software) | £ 49.00 + vat |
| Pointer Rom - available separately | £ 12.50 + vat |
| Trackerball to mouse adapters | £ 8.00 + vat |
| Postage & packing on Trackerballs | £ 1.75 |

All orders sent by return

MITEYSPICE

Miteyspice is a very powerful AC & DC circuit analysis package with graphics suitable for use with any model BBC micro including those with 2nd processors.

As well as all the usual facilities available with this type of program, non-linear effects, small signal, noise measurements and sweeps may be performed. Component values may be swept, allowing component tolerances to be investigated as well as thermal performance etc. Comprehensive transistor modelling is incorporated using a 20 parameter Ebers Moll description. The program is supplied on disc with a very comprehensive 49 page manual.

PRICE £ 119.00 + vat

ADFS Utilities Rom - ADU

ADU is an invaluable utility for all ADFS users. It adds over 20 new commands to the ADFS filing system as well as providing an extensive Menu facility with over 35 sub commands covering areas such as repeated disc comparison, saving and loading Rom images, auto booting of files and many more.

Copying of DFS discs onto ADFS discs can be made in one pass with automatic creation of the required directories on the ADFS disc. All functions are fully compatible with Winchester drives including *BACKUP which allows backing up of Winchester onto multiple floppies.

Additional commands include:- *ADU, *BACKUP, *CATALL, *CHANGE, *DFSDFS, *DIRALL, *DIRCOPY, *DIRDESTROY, *DIRRENAME, *DISCEDIT, *DRIVE, *FILEFIND, *FORMAT, *KILLADU, *LOCK, *MENU, *PURGE, *PURBKB, *UNLOCK, *VERIFY, *WFORMAT.

PRICE £ 29.00 + vat

VISA

39 Brownlea Gardens, Seven Kings, Ilford, Essex IG3 9NL Tel 01-599 1476

Access

feature of the program is an automatic return date function which takes into account any school holidays. The return period is stored in the software but can be manually adjusted.

The package is currently being tested by Mrs Lynne Jackson who is the librarian at Hyde High School, Tameside in Manchester. Once tests are completed the software will go on general release.

Programme notes on air

THE BBC Education services department is extending its service to teachers by providing programme notes on Ceefax.

After an experimental period of just over a year the BBC has concluded that to provide teachers notes on tele-software which can be downloaded is a far more efficient way of distributing information to schools and colleges.

Normally programme notes have to be requested by teachers in advance of a broadcast; with the help of Ceefax the ordering process can be dispensed with.

The service has several advantages, notes can be prepared by the BBC up to a week before the broadcast, any updates can be down-loaded instantly and expensive reprinting costs of updated material has been done away with.

Further details of the service can be obtained from the BBC's Education Department on 01-991 8015.

Plotting with Domesday

EDUCATIONAL establishments which are using the BBC Enterprises Domesday project now have a new way of presenting the stored data other than on screen.

Linear Graphics (0702 541663) has released a utility disc for its plotters that makes use of the software on the Domesday welcome disc. Data on the national disc can then be re-processed into pie, bar and line chart format as required.

Schools that have access to a Domesday system at a remote location can spool data to a separate disc of their own and upon return to the classroom use Plotmate to output the data. Price of the utility disc is £25. Plotters are available from £375.

Micro aids the disabled

SEVERELY disabled students at Clatterbridge school in Bebington, Merseyside are benefiting from the use of the BBC Micro in the classroom.

Two students in particular, Claire Pinches and Kathryn Weir have been able to express themselves more freely thanks to BBC Micros. Claire, aged 12, was featured recently in the BBC Television programme "With a little help from the chip".

Because she is unable to use the BBC Micro keyboard or even a joystick a photonic wand was developed which clips to Claire's glasses. Simply by moving her head and pointing a beam of light at a receptor the appropriate letter is then registered on the screen.

"The benefits to her have been tremendous", says deputy headmaster Gareth Green. "Thanks to the BBC Micro and the photonic wand she has been able to progress much faster than would otherwise have been possible".

Dr John Cole developed the photonic wand especially for Claire following a chance conversation over dinner. The

wand and the software for the BBC Micro were completed in a single weekend and proved so successful that it is now used widely.

Thanks to the wand, Claire is able to complete all of her school work on the computer using the Write word processor which was also written by Dr John Cole.

Kathryn, aged 10, has also been helped by the BBC Micro. She is confined to a wheelchair and although has very little strength in her arms she is able to move about using a joystick to control her wheelchair.

"Although Kathryn has very little physical strength she has a very delicate artistic touch which she uses to her advantage", said Gareth.

Because she is so weak a joystick with extra sensitive micro switches was developed. The joystick linked to the BBC Micro with the Painter program loaded allows Kathryn to draw on screen. "Considering she is only 10 years old and so severely handicapped the drawings she produces are excellent", said Gareth.



Claire Pinches



Kathryn Weir

The Princess from The Golden Apples
by Kathryn Weir



Turn your BBC Micro into a teletext receiver!



**COMPUTING
AND
TELESOFTWARE**

TELESOFTWARE

| | | |
|--------|--|---------------|
| NEXT | Micro-magazine..... | 701 |
| | Reviews..... | 702 |
| DATA | Forthcoming events..... | 703 |
| REPORT | Education special - software reviews..... | 704 |
| *CAT | Programs available now..... | 710 |
| *INFO | Program information..... | 711 |
| LIST | Programs next week..... | 712 |
| | TELESOFTWARE The programs..... | 720 to 731 |

What you get

The stylish teletext unit, 16k ATS rom, 16k utilities rom (including printer dumps), two manuals and a utilities disc. An optional power supply is available.

Join the 3.5 million households who regularly use teletext. The thousands of pages on Ceefax, Oracle and 4-Tel cover everything from programme details and up-to-the-minute news to share prices and football results. But if you have a BBC Micro you can do much more than flash from page to page. With the Morley Teletext Adapter and a normal TV or monitor, you can:

- Store pages in memory
- Download the FREE telesoftware (updated every week)
- Use the real-time clock in your programs
- Automatically load associated pages each time you select a page from the menu – considerably speeding up access time

The Morley Teletext Adapter is simple to install – it plugs straight into the user port. The software is menu-driven with easy-to-follow instructions – it even automatically tunes itself to the required channel.

**NORMAL
PRICE**
£127

SPECIAL OFFER PRICE
£99.95

Note: If you use your BBC Micro's auxiliary power socket for your disc drive, or any other external device, you will need a power supply which we can provide for £9.95.

All prices include VAT and P&P.

IMPORTANT: The BBC points out that a teletext adapter, like a TV set, will not work satisfactorily without a good outside aerial. Nor will it function correctly if you experience reception problems such as ghosting.

They emphasise that these problems only affect a few areas of the country. However if you have any doubts as to the quality of signal available in your area you should contact the BBC Technical Support Service on 01-927 5040.

TO ORDER TURN TO THE FORM ON PAGE 149

Teachers' guide

NOTES to accompany BBC radio and television educational programmes are now available without having to fill out complex order forms, or part with any money.

BBC Telesoftware are broadcasting the notes to over 30 series and they are available free to anyone with a micro and suitable teletext adapter (a teletext TV set cannot be used).

Once received, the notes can be easily printed out if you have a printer. A word processor is not needed, but can be used to reorganise the text to form pupil worksheets or a written summary of the programme.

If your BBC Micro and teletext adapter are equipped with the ATS rom, then this program will help you. It will scan the BBC transmissions to find out what software is currently being broadcast. If teachers' notes are available they will be automatically downloaded, recompiled

Jeremy Brayshaw

shows how to get free

notes from Ceefax

into a plain text file and saved to disc.

To use the software, make sure your adapter is switched on and connected to both an aerial and the computer. Load the program, then insert a blank disc ready to receive the notes. Type RUN, then sit back.

The micro will diligently work away until all the notes have been saved on disc. Once saved, the notes can be read by selecting an 80-column mode such as Mode 3, and entering:

***TYPE <filename>**

Before pressing Return press either Control+N to stop the screen scrolling – giving you time to read the text – or Control+B to send the text to your prin-

ter as well as the screen. After printing the notes, press Control+C, otherwise your printer will obediently reproduce everything you type thereafter.

The notes sent by Telesoftware have been formatted to suit standard continuous printer paper (66 lines per page, 80 columns per row) so no alterations are needed to reproduce the notes on any popular computer printer.

For any other size paper, it may be necessary to adjust the text to suit, using any wordprocessor. To load the text into Mini Office II or Wordwise, use the normal Load Text option.

With View, type READ <filename> (instead of the more usual LOAD command) and for other word processors, follow that system's User Guide for details of loading plain Ascii files.

Teachers' notes from Telesoftware save time, money and effort. Using ATS to receive them makes the downloading process very simple.

With our automatic downloader program as well, the whole process becomes so easy you'll wonder why you ever got the notes in any other way.

```

100REM *****
110REM * AuNotes - ATS Utility *
120REM *****
130ONERRORGOTO410
140MODE7
150VDU23;8202;0;0;0;
160*TTXON
170*BBC2
180*HON
190PROCmove_oshwm
200DIM space 20,name 12,line 15
210DIMpage$(30),fname$(30),load$(30),e
xec$(30),pages$(30),mag$(30),D(5)
220PROCheading("File: Catalogue")
230AX=TIME:REPEAT:UNTILTIME>AX+200
240PROCfindcat(FNgetlink)
250IFMX>9 ORNX>&FE PROCheading(" Error
- No Catalogue"):GOTO410
260PROCheading("File: Catalogue Pa
ge: "+STR$(MX)+RIGHTS("00"+STR$(NX),2))
270PRINTTAB(0,0);"P";STR$(MX);RIGHTS("
00"+STR$(NX),2)
280PROCdownload(MX,NX,"CATALOG",0,0,FA
LSE,TRUE)
290PROCinterpret
300IFZX=0 MODE7:PROCheading(" No notes
broadcast this week"):GOTO410
310FORWX=1TOZX
320MODE7:VDU23;8202;0;0;0;
330PROCheading("File: "+fname$(WX)+STR
INGS((12-LEN(fname$(WX))), " ")+_Length:
"+pages$(WX))
340PRINTTAB(0,0);"P";mag$(WX);RIGHTS("
00"+STR$(page$(WX)),2)
350PROCdownload(mag$(WX),page$(WX),fna
me$(WX),load$(WX),exec$(WX),TRUE,TRUE)
360REM PROCdownload(mag%,page%,fname$,
load%,exec%,file%,reset%)
370NEXT
380MODE7
390PROCheading(" Notes downloaded:")
400FORAX=1TOZX:PRINT " "+fname$(AX):
NEXT
410*HOFF
420PROCreturn_oshwm
430END
440:
450DEFPROCmove_oshwm
460SX=&5000
470AX=&B4:XX=S%DIV256:YX=0:CALL&FFF4
480ENDPROC
490:
500DEFPROCdownload(magazine%,page%,fil
ename$,load%,exec%,save%,reset%)
510PROCoscli("MAGAZINE "+STR$(magazine
%))
520space?0=24
530space?1=name MOD256:space?2=name DI
V256
540$name=filename$
550space!3=load%
560space!7=exec%
570space?11=magazine%
580space?12=page%
590IFsave%=TRUE space?13=1 ELSE space?
13=0
600IFreset%=TRUE space?14=0 ELSE space
?14=1
610AX=&7A:XX=space MOD256:YX=space DIV
256
620CALL&FFF1
630ENDPROC
640:
650DEFPROCoscli(text$)
660$line=text$:XX=line MOD256:YX=line
DIV256
670CALL&FFF7
680ENDPROC
690:
700DEFPROCheading(fname$)
710CLS
720PRINT"CHR$132;CHR$157;CHR$141;CHR$1
30;"Teachers Notes from Telesoftware"
730PRINTCHR$132;CHR$157;CHR$141;CHR$13
0;"Teachers Notes from Telesoftware"
740PRINTTAB(1,5)fname$
750ENDPROC
760:
770DEFPROCreturn_oshwm
780AX=&B4:XX=PAGE DIV256:YX=0:CALL&FFF
4
790ENDPROC
800:
810DEFPROCinterpret
820sta%=SX:ZX=0
830sta%=sta%+1+?sta%:sta%=sta%+1+?sta%
840Z=0:REPEAT
850REM m/c:
860len%=?sta%
870FORAX=sta%TOsta%+len%:AX=(?AX)AND&
7F:NEXT
880TX=(?sta%+len%+1):?(?sta%+len%+1)=13
:sta%$=(?sta%+1):?(?sta%+len%+1)=TX
890sta%=sta%+1+?sta%
900IFsta%="***" GOTO1090
910REM filename:
920len%=?sta%
930FORAX=sta%TOsta%+len%:AX=(?AX)AND&
7F
940IF?AX>&40 ?AX=(?AX)AND&DF
950NEXT
960TX=(?sta%+len%+1):?(?sta%+len%+1)=13.
:sta%$=(?sta%+2):?(?sta%+len%+1)=TX
970sta%=sta%+1+?sta%
980REM File type:
990len%=?sta%
1000FORAX=sta%TOsta%+len%:AX=((?AX)AND
&7F)AND&DF:NEXT
1010TX=(?sta%+len%+1):?(?sta%+len%+1)=13
:sta2$=(?sta%+1):?(?sta%+len%+1)=TX
1020sta%=sta%+1+?sta%
1030len%=?sta%
1040FORAX=sta%TOsta%+len%:AX=(?AX)AND&
7F:NEXT
1050TX=(?sta%+len%+1):?(?sta%+len%+1)=13
:sta3$=(?sta%+1):?(?sta%+len%+1)=TX
1060sta%=sta%+1+?sta%

```

Turn to Page 80 ►

UTILITY

◀ From Page 79

```

1070IFsta2$="NOTES" ZX=ZX+1:fname$(ZX)=
sta$:pages$(ZX)=sta3$:load$(ZX)=FNaddr(sta
ta%):exec$(ZX)=FNaddr(sta%+4):mag$(ZX)=?
(sta%+8):page$(ZX)=?(sta%+9)
1080sta%=sta%+10
1090UNTILsta$="***"
1100ENDPROC
1110:
1120DEFFNaddr(st%)
1130GS=RIGHTS("00"+STR$(?st%),2)+RIGHT
S("00"+STR$(?st%+1)),2)+RIGHTS("00"+ST
RS"(?st%+2)),2)+RIGHTS("00"+STR$(?st%
+3)),2)
1140=EVAL("&"+GS)
1150DEFFNgetlink
1160space?0=15:AX=87A:XX=space MOD256:Y
X=space DIV256:CALL&FFF1
1170IF((space?1)*100)+space?2>999 PROCh
eading(" Error - No Catalogue"):GOTO410
1180=((space?1)*100)+space?2
1190:
1200DEFFPROCfindcat(0X)
1210PROCoscli("PAGE "+STR$(0X))
1220LOCALa%,pn$,row%
1230DATA 5000
1240a%=&5000-42
1250REPEAT
1260a%=a%+42
1270UNTIL(a%?1=27 AND FNdeham(a%?2)=0)

```

```

0RaX>&5800
1280IFaX>&5800 MX=0:PROCh heading(" Error
-no catalogue"):GOTO410
1290FORVX=0TO5
1300D(VX)=27+VX
1310D(VX)=FNdeham(a%?D(VX))
1320NEXT
1330MX=((D(5) AND12)DIV2)OR(D(3) DIV8)

```

```


)EOR(0XDIV100)
1340NX=(D(1)*16)+(D(0))
1350ENDPROC
1360:
1370DEFFNdeham(byte%)
1380space?0=25:space?1=byte%:AX=87A:XX=
space MOD256:YX=space DIV256:CALL&FFF1
1390=(space?2)AND&F

```



| | | | | | |
|--------------|--------------|--------------|--------------|---------------|---------------|
| 130 = FCF6 6 | 320 = 880B 6 | 520 = AF55 5 | 740 = 5F71 C | 960 = BEF4 C | 1180 = 4402 5 |
| 140 = 8AFC 9 | 330 = A662 E | 530 = D3D4 A | 750 = ED0F 1 | 970 = ADD4 1 | 1190 = 9719 F |
| 150 = F716 4 | 340 = 4331 A | 540 = BD8C 8 | 760 = 9719 7 | 980 = 0 1 | 1200 = C887 9 |
| 160 = D363 0 | 350 = 27A9 C | 550 = B50C 6 | 770 = 7287 2 | 990 = BE10 1 | 1210 = 1934 4 |
| 170 = F0AD 8 | 360 = 0 C | 560 = D36B 7 | 780 = B659 9 | 1000 = 8977 9 | 1220 = A792 F |
| 180 = 5F11 2 | 370 = 2C83 9 | 570 = 2F9F 0 | 790 = ED0F F | 1010 = 41D2 0 | 1230 = B563 C |
| 190 = C5B8 D | 380 = 8AFC 7 | 580 = AA74 9 | 800 = 9719 E | 1020 = ADD4 3 | 1240 = A87F B |
| 200 = 4D26 5 | 390 = D83D D | 590 = DE05 7 | 810 = 41C7 7 | 1030 = BE10 5 | 1250 = BFBA 0 |
| 210 = 538E 3 | 400 = 38FC A | 600 = 3C2B 4 | 820 = B440 F | 1040 = 532A F | 1260 = 2D04 C |
| 220 = B1D8 F | 410 = 1BB1 1 | 610 = 614C 6 | 830 = 9D64 8 | 1050 = 48CD 3 | 1270 = C043 4 |
| 230 = 89D0 C | 420 = A51E 3 | 620 = 8B74 2 | 840 = D6B2 A | 1060 = ADD4 7 | 1280 = 1C88 4 |
| 240 = BFEB 9 | 430 = FD2E D | 630 = ED0F D | 850 = 0 A | 1070 = 85FC B | 1290 = 376F 6 |
| 250 = CF38 8 | 440 = 9719 4 | 640 = 9719 9 | 860 = BE1D D | 1080 = DEB8 8 | 1300 = B418 4 |
| 260 = 332B 0 | 450 = 9000 D | 650 = B13E D | 870 = 532A 6 | 1090 = FB8E B | 1310 = 248F C |
| 270 = 57BB 2 | 460 = D671 D | 660 = 1331 6 | 880 = E021 4 | 1100 = ED0F 2 | 1320 = 2C83 A |
| 280 = 7F0 8 | 470 = F9C1 1 | 670 = EBB2 6 | 890 = ADD4 D | 1110 = 9719 E | 1330 = 1350 1 |
| 290 = F205 4 | 480 = ED0F 4 | 680 = ED0F 6 | 900 = 6CDD F | 1120 = 75BD 7 | 1340 = 33A4 C |
| 300 = 8E5B 5 | 490 = 9719 1 | 690 = 9719 E | 910 = 0 F | 1130 = A633 4 | 1350 = ED0F 0 |
| 310 = 88B2 A | 500 = 6E01 2 | 700 = 1442 E | 920 = BE1D F | 1140 = 6C92 1 | 1360 = 9719 8 |
| | 510 = 36C 1 | 710 = 7A16 5 | 930 = 766 E | 1150 = A017 1 | 1370 = 7251 B |
| | | 720 = 659E D | 940 = ACBD A | 1160 = 2461 B | 1380 = EC4D 3 |
| | | 730 = BC60 7 | 950 = 2C83 D | 1170 = FF78 2 | 1390 = 5C1C 7 |

ENTER THE EXCITING WORLDS OF
Dinosaur Discovery, Box of Treasures
Granny's Garden, DragonWorld,
Flowers of Crystal, The Big Calculator
Zoopak, Tele-Book, Spacex

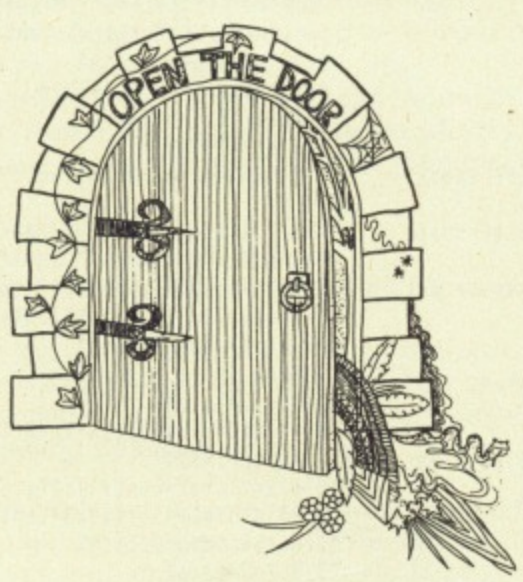


TTNS MAILBOX 01-YNK045
 "SEND LARGE 20p SAE FOR BROCHURE"

MASS DATA STORAGE - The Complete Solution

With more experience than any other company in the provision of hard disc storage for BBC users, Amcom can supply a range of ADFS compatible winchester drives, second to none.

With storage capacities of up to 600 megabytes, Amcom winchesters are designed for use in demanding environments like schools, colleges, and universities as well as for industrial applications.

Connection of an Amcom winchester couldn't be simpler as it connects directly to the 1MHz bus socket of the computer by a 34-way cable. Plug in, switch on, and that's all there is to it.

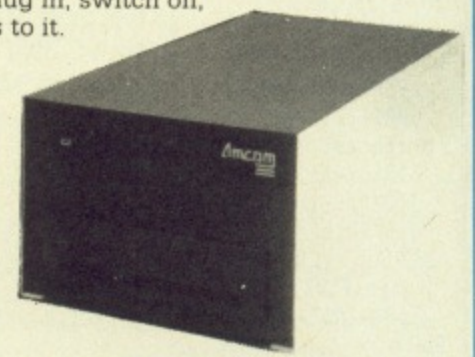

Now Only
£599 + VAT
 For 20MBytes

Amcom for the complete mass storage solution




For further information on: Winchester hard discs, Educational networking systems or Tapestreamers, contact:
 Amcom Software Ltd. 35 Carters Lane, Kiln Farm, Milton Keynes MK11 3HL. Telephone (0908) 569212

ARM Assembly language programming

By Peter Cockerell

This book describes in detail all aspects of programming the new Acorn Risc chip (generally referred to as the ARM). This 32-bit chip, on average 4 times faster than a 68000, will form the basis of a new generation of machines. The book explains why the chip is so fast and how to take full advantage of its power.

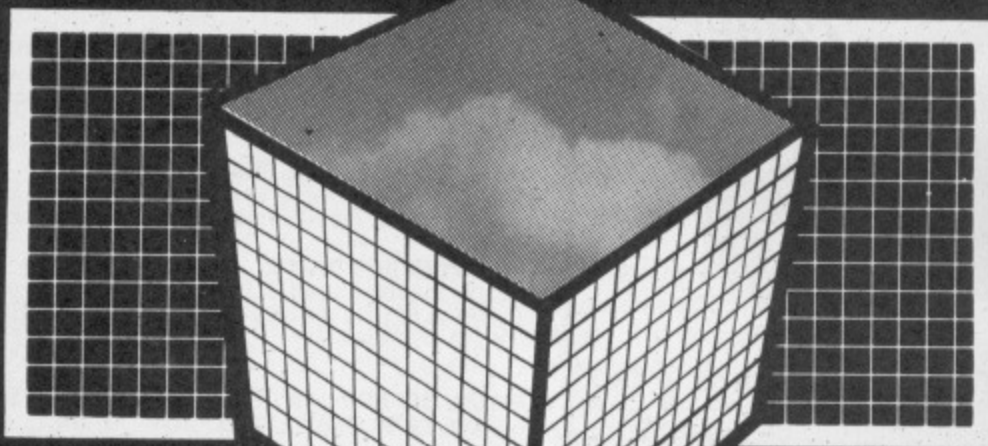

Topics covered include;

- ▶ First concepts.
- ▶ Inside the ARM.
- ▶ The ALU and barrel shifter.
- ▶ The instruction set.
- ▶ Instruction timings.
- ▶ The BBC BASIC assembler.
- ▶ Assembly programming principles.
- ▶ Data structures.
- ▶ Non-user modes.
- ▶ Undefined instructions.
- ▶ Interrupts and vectors.

The book is completely up-to-date covering only the new 2 micron ARM, with appendices on the floating point and co-processor instructions and with numerous example programs. A truly comprehensive reference manual for anyone who intends to program in ARM assembly language, or for those who just want to find out why the Acorn RISC chip is so special.

Price £12.95



Computer Concepts

Gaddesden Place, Hemel Hempstead, Herts HP2 6EX. Tel: (0442) 63933


Access/Barclaycard accepted. All orders despatched within 24 hours.

**AVAILABLE
NOW!**


VOLTMACE



COMPATIBLE

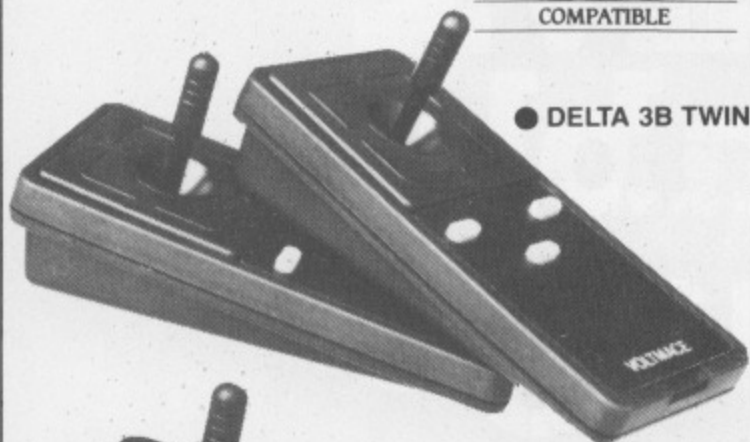


● DELTA 3B TWIN

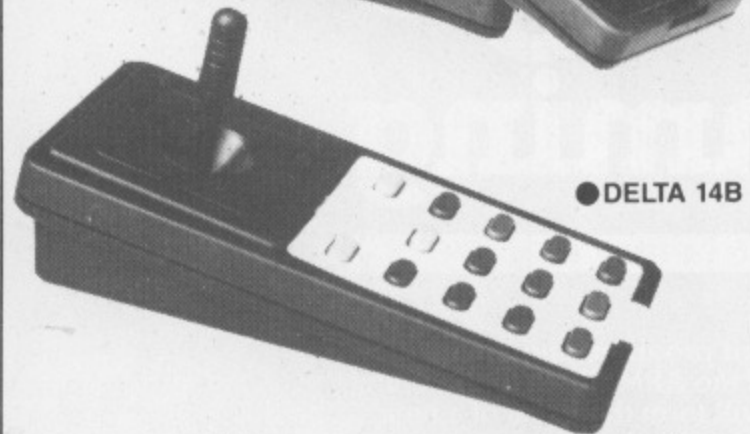


● DELTA 14B



● DELTA 3S or 3SO

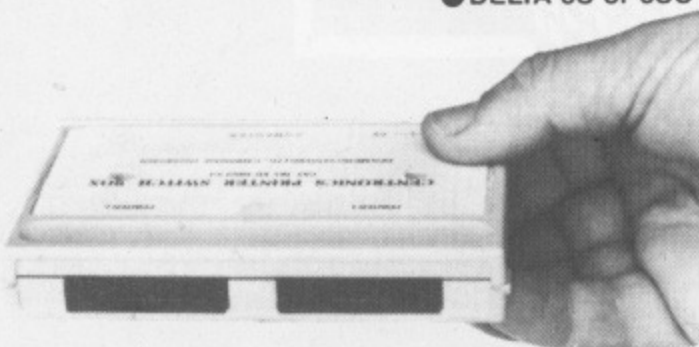

● DATAPRINT 2P

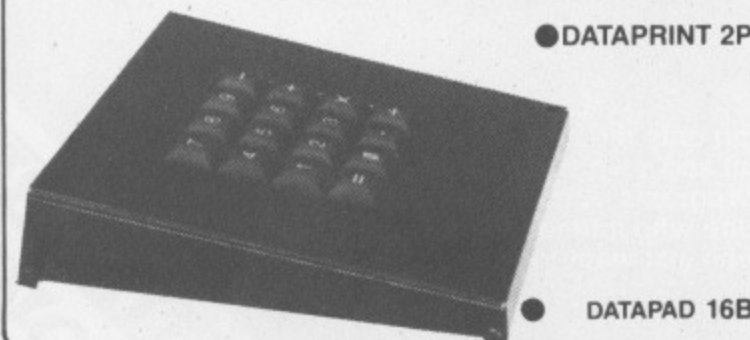

● DATAPAD 16B

SPECIAL OFFER

on Double Sided, Double Density, 80 Track,
1/2 Height DISC DRIVES with lever fronts in cream steel cases
with leads for BBC B, Master
£74.95 inc. VAT and P&P
Send s.a.e. or phone for details

FOR A BBC A, B, B + & MASTER

DELTA 3B TWIN – £19.95

2 joysticks wired to one plug.
As with all our joysticks they have the fast action sprung to centre return of the steel shafted nylon covered joystick. The light action makes them ideal to hold and the 3 fire buttons allow left or right-handed use.

DELTA 3B SINGLE £12.95

A single joystick that in some ways can act as two. The custom made potentiometers are wired so that it will work as a left hand or right hand joystick. It can run some programs written for two joysticks and has two independent fire functions.

DELTA 14B £14.95

Our original ACORN/BBC handset. The same super light joystick, but with 14 long life buttons, video game tested for many years. A DELTA14B/1 is needed to run the keypad but a 14B on it's own will work as a joystick and fire buttons, so you can always add the 14B/1 to it later.

DELTA14B/1 for use with 1 or 2 DELTA 14B's £14.85

DELTA DRIVER CASSETTE £5.95

The A/D/USER PORT interface box. This gives simultaneous access to both the analogue port, for the joystick part and the user port, for the keypad. Two handsets can be plugged into the box giving a total of 24 user definable keys.

N.B. On a Master a small extension lead is needed to clear the RGB socket (£5.95 extra).

Full instructions are provided to include the keypad in your own programs even in BASIC or for the non-programmer a DELTA DRIVER cassette is available with keyboard to joystick/keypad conversions and keypad set up programs.

FOR THE MASTER COMPACT OR ELECTRON FITTED WITH A SWITCHED JOYSTICK INTERFACE

DELTA 3S £12.95

For an ELECTRON with a switched joystick interface (not a PLUS 1) this gives you the same delightful light, fast action of the DELTA joysticks but fitted with a 9 way D plug as per Atari, Commodore, etc. and will run on First Byte interface or similar.

DELTA 3SO – OPTICAL FEED BACK £19.95

Now you can see exactly when each switch has operated so you can move about faster and more certainly guaranteeing diagonals.

FIRST BYTE INTERFACE £19.95

Probably the most used ELECTRON interface – comes complete with software to run the majority of games on the ELECTRON using a DELTA 3S or DELTA 350 joystick.

SPECIAL OFFER buy a DELTA 3s and a FIRST BYTE INTERFACE together and **SAVE £2.95. ONLY £29.95.**

NEW !!! DATAPRINT 2P LOW COST – LOW PROFILE – PRINTER SHARER

£34.95

A neat small unit which allows two parallel printers to be connected to one computer and simply switched between the two. e.g. one printer for paper and one for labels.

DATAPRINT 2C LOW COST – LOW PROFILE COMPUTER SHARER £34.95

The opposite of the DATAPRINT 2P this little box just 125 x 90 x 20mm allows two computers to share one printer.

DATAPAD 16B £39.95

A commercial spec. 16 way keypad. Full travel mechanical keys with double shot moulded keycaps mounted in a low profile metal case. The keys are marked with calculator legend, but the software included allows the pad to be defined as any keys, including function keys or single byte VDU commands such as PRINTER ON/OFF. No tampering with the computer as it fits onto the user port.



Available from your dealer
or direct from us on
(0462) 894410



Unit 9, Bondor Business Centre, London Road, Baldock, Herts. SG7 6NG. Telephone (0462) 894410

Not too elementary, my dear Watson

ONE problem with attempting to review an educational program of this type is knowing exactly for whom it is best designed. To make matters worse, a succinct description of the program is almost impossible.

Based on the first of Blackie's solve it yourself mysteries, *Mystery Squad Adventure One* provides a scrolling text storyline on the bottom quarter of the screen, while the upper three quarters contain an illustration which is the same for each chapter.

At the end of each section of text, a multiple-choice question is asked of the "What should they do next?" variety. A helpful, and different, picture from the one shown when the text is scrolling, provides a strong clue each time.

Depending on the answer chosen from the two or three possibilities given, points are awarded towards a Detective Rating. Lowest grade is Beginner; and the child can progress through Trainee, Junior Detective and so on, right up to Sherlock Holmes.

According to the accompanying literature, the program is designed to develop skills of observation, comprehension and decision making, and (if used in a group) those of discussion and expression.

The suggested age range of pupils is 9-14 year olds – so once again, I sent the disc to my local primary school for evaluation and comment from a group of bright nine year olds and their class teacher who is the school computer specialist.

The children were very enthusiastic, and they particularly enjoyed the fact that if a totally wrong answer to the first question is entered, then a custard pie is thrown at you – the accompanying illustration shows a most suitable "splat" effect.

Their teacher was more reserved in his judgement – and I think rightly.

He particularly made the point that fairly hefty chunks of material had to be absorbed before the questions were put and criticised the unchanging text illustration.

For some brighter children working in groups the program would be fun and useful – for others it would demand constant attention from the teacher.

I must emphasise that this program was tried out on the lowest of the desig-

nated age range, and that an altogether different reaction might be obtained from those in the first two years of secondary education.

There is one other use to which this program might be put – and that, paradoxically, is in a remedial situation.


Let me explain: With a nine year old son who has some difficulty in reading, but otherwise is quite bright – it is a major battle getting him to read something.

We sat at the computer together, and I set the program running. As the text began to appear on the screen, he howled in protest that it was coming too fast. Inevitably he asked me to read it to him. Being a brutal parent I did nothing of the kind – instead I pressed the cursor down key for as long as possible.

Eventually the text appeared at a rate that he could manage, and he soon began to read aloud to me, rapidly becoming absorbed in the story. At the end of the chapter we discussed what to do and, since he made the right choice, he was thrilled to be awarded his first points.

As the story progressed, I surreptitiously increased the pace at which the text appeared little by little until, towards the end of the adventure, the text was being printed on screen at about the speed to which he had objected greatly when we first started.

This approach demands time and concentration from an adult, as well as the low cunning normally to be expected of

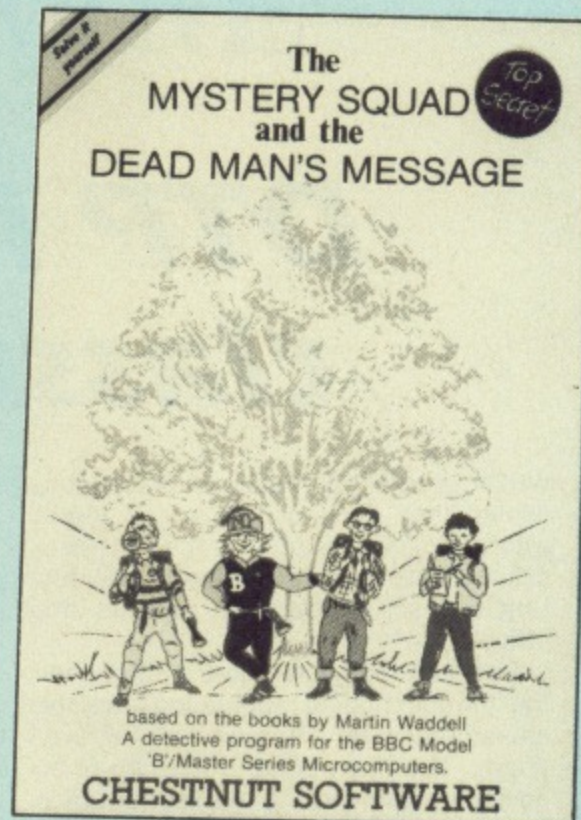


any teacher or parent.

It does mean, therefore, that the program could only be used in this way where the class situation meant there was someone able to be detached from other duties in order to improve a pupil's reading speed.

For those readers of *The Micro User* who are parents in a similar situation to mine, this program can certainly be recommended if they are willing to spare the time. For school use I would recommend it for the brighter pupils in a primary environment, and those of around 11 upwards.

Bob Redrup

Product: *The Mystery Squad and the Dead Man's Message*
Price: £6.95
Supplier: Chestnut Software, 37 Chestnut Drive, Bexleyheath Kent DA7 4E.
Tel: 01-303 2981

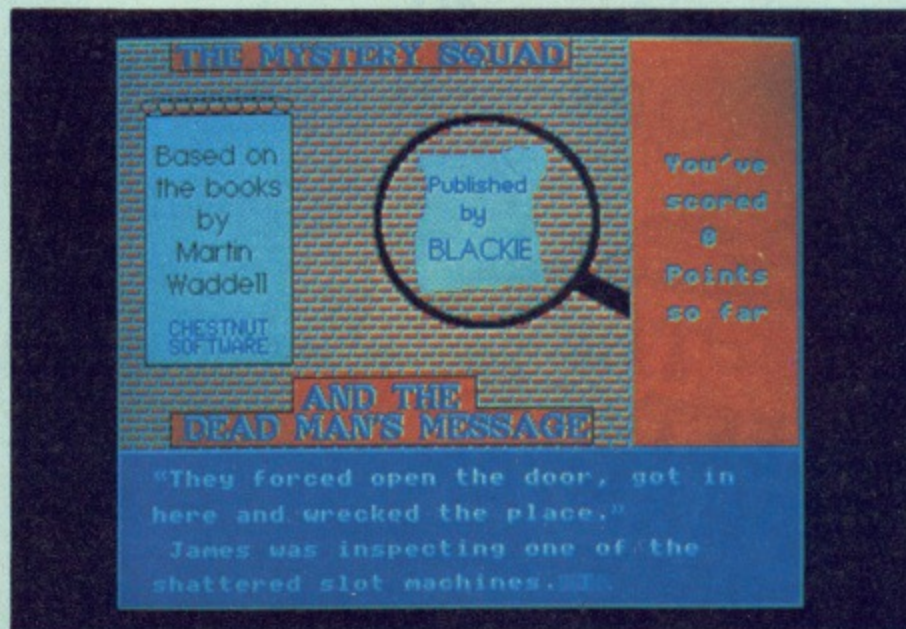

DTP in the classroom

WHEN people talk about desktop publishing they don't usually mean desks with a hinged lid and a groove for pencils. But the print revolution is now hitting the schoolroom as well as the office.

Sherston Software have approached the introduction of publishing into the classroom with a linked pair of programs. The Fleet Street Phantom is an adventure game with a newspaper office scenario and Typesetter! is a desktop publishing package for schools.

The packages can be used separately but Sherston have seen this as a wider introduction to publishing. Both packages include a wealth of ideas for further work in language, maths, science and every other area of school activities – even music.

The Fleet Street Phantom adventure is in two parts and recommends that children complete the first part in one session while the second part can be spread over several.

Neither is too long: Part one takes

about 30 minutes and part two 40-50 minutes. The skill level is adjustable and I found the lower level well within eight to nine year old capability.

The graphics are very good – detailed, well-drawn scenes in good colour and clear text make this a very attractive package. There are a few humorous details and the denouement had my junior testers laughing at the animation.

The tasks which have to be completed in order to identify the phantom (he has a similar affect to a printer's devil) are language-based. They include punctuation, comprehension, a crossword, and scanning for information. The adventure also encourages inference, note taking,

problem solving and logical thinking, as do most good adventure games.

Typesetter! enables the publishing theme to be taken to its logical conclusion and for the class to produce its own newspaper. With it you can produce an A4 sheet in either normal or italic type. Though there is only one font, Times Bold, Sherston do say that further fonts will be available.



The package does not include any graphics but the text can be in either normal or in one of three sizes of headline type. Quite attractive results are possible by creative use of boxes and sizes, and there is nothing to prevent blank boxes being left for the addition of graphics before photocopying.

It took me a couple of evenings to get used to the package as I found the guided tour no substitute for a real attempt to plan and produce a dummy newspaper.


Typesetter! cannot compete with professional-quality packages with graphics, several fonts and lots of gimmicks. But then it would not be as easy to use or be something a nine year old could hope to work with. Instead it is a fairly robust, simple package which can produce a respectable result.

Most of the interaction with the program is through function keys calling pop-up menus within which options are chosen by cursor keys and Return. These are very easy to use and children have no difficulty in learning to deal with them.

The separate modules are referred to as Rooms, for instance printing is controlled from the Print Room, and one of the pop-up menus effects movement

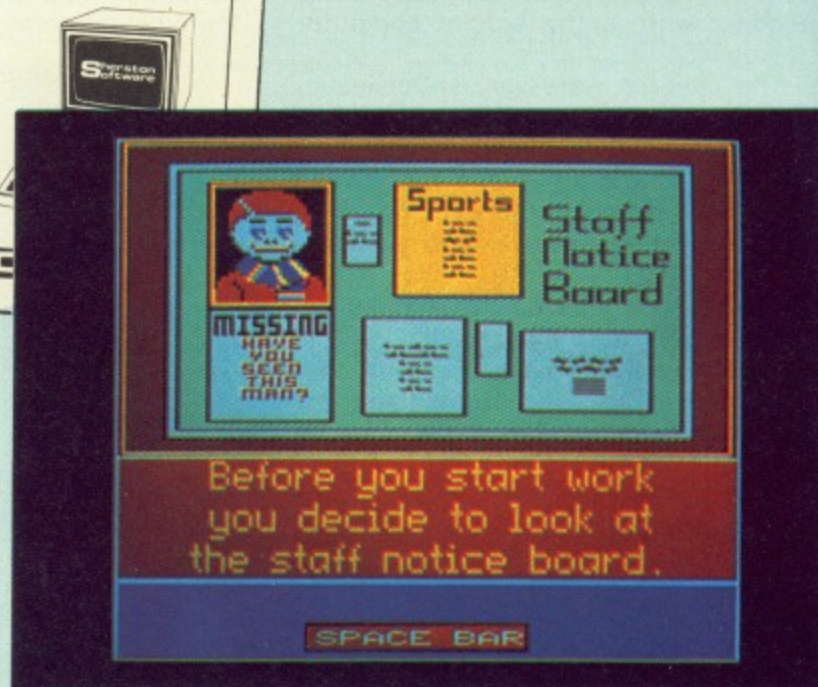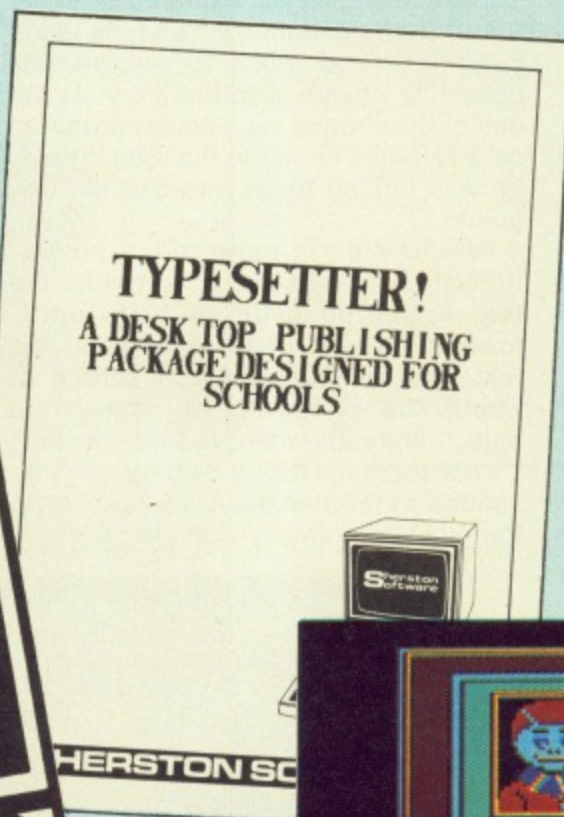

COME HOME TO A REAL LIVE WIRE

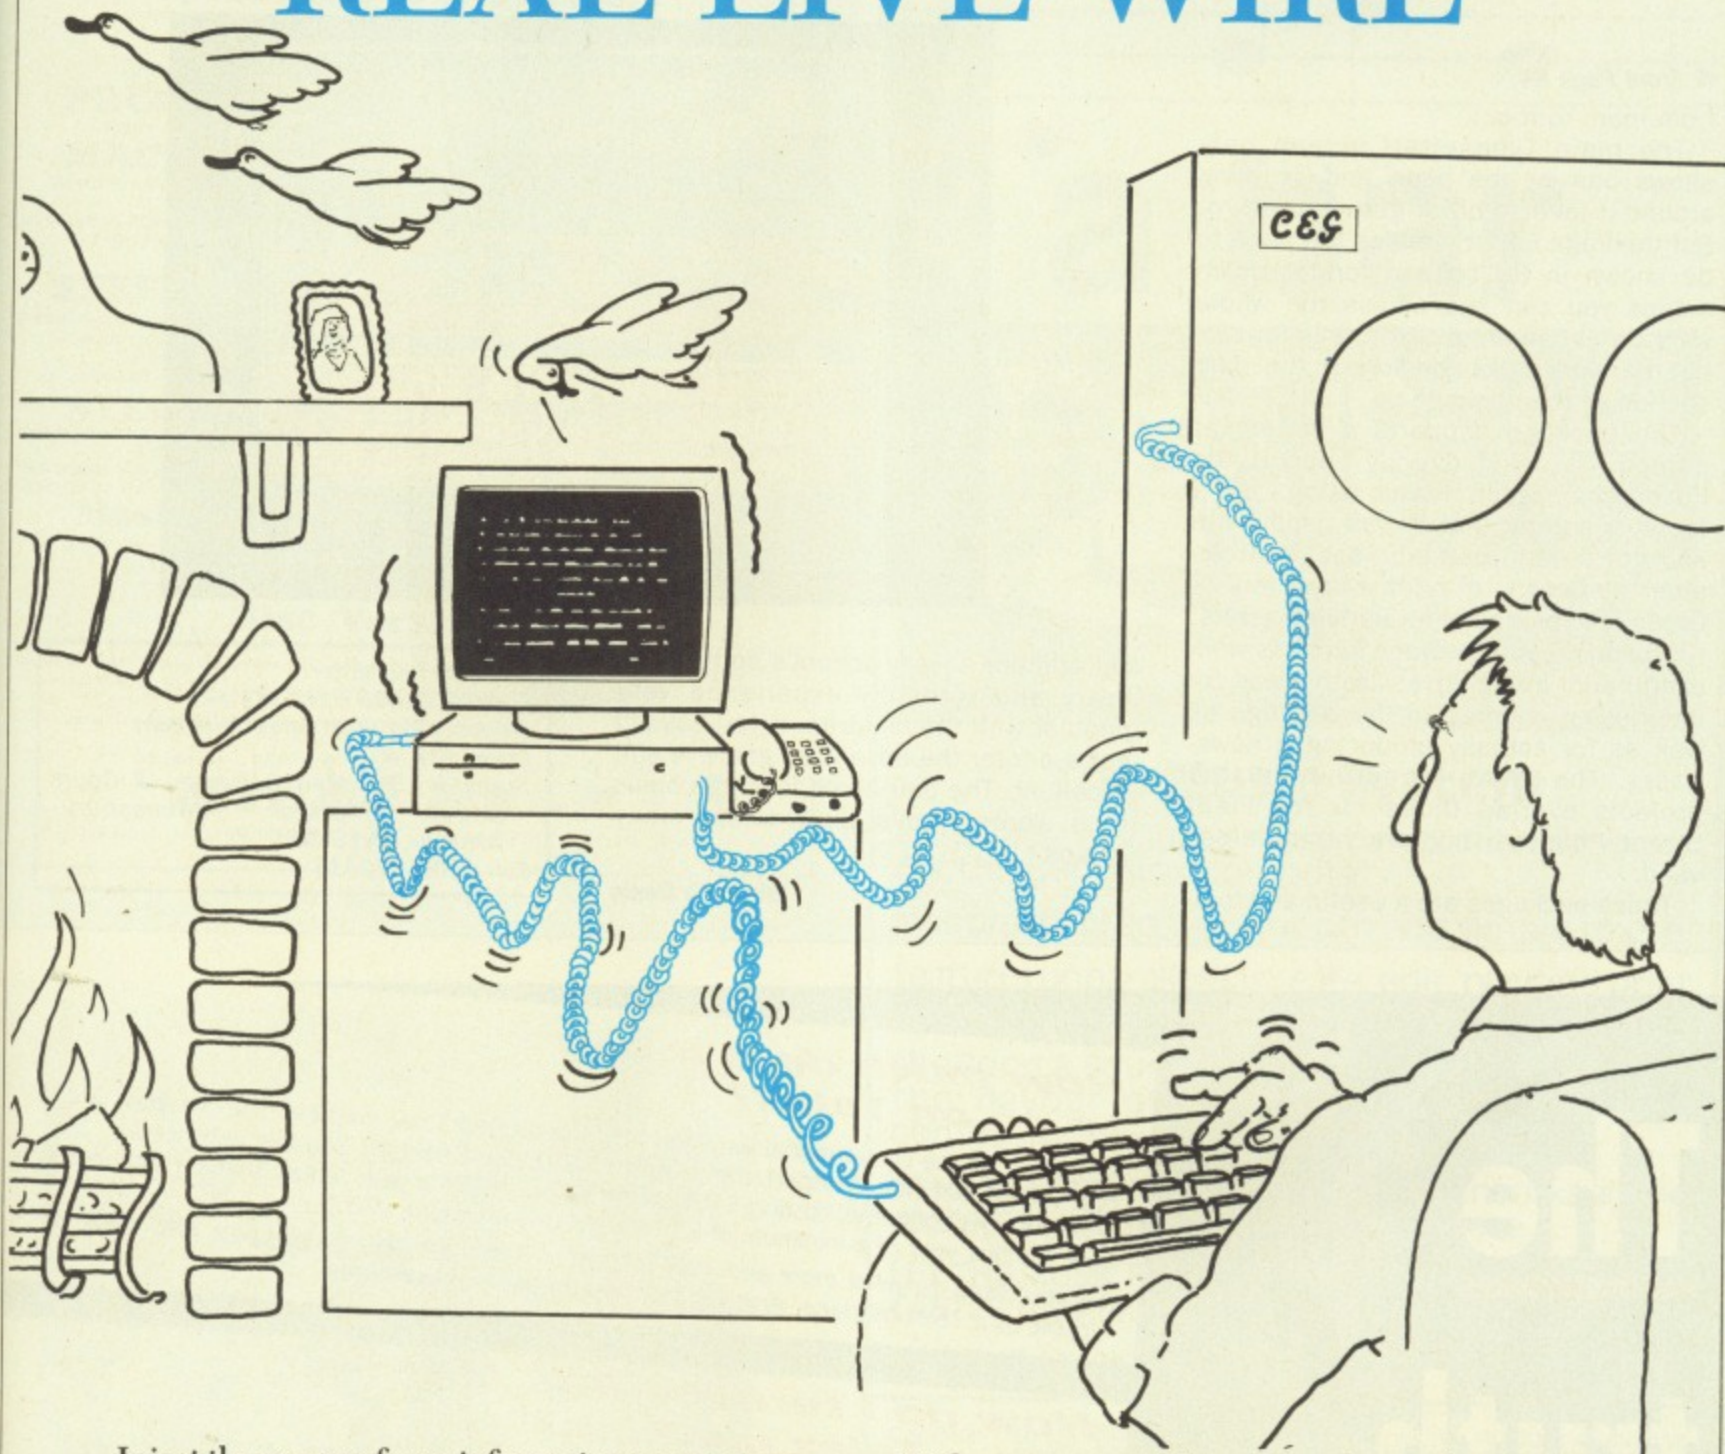

Inject the power of a mainframe into your micro. MICRONET is the only product that provides you with:-

- Real-time interactive chatlines
- Free and discounted telesoftware
- M.U.G.'s inc the UK's most popular SHADES™
- Daily computer news and reviews
- Free PRESTEL™ electronic mail
- Teleshopping – holidays, hotels etc.
- 70,000 PRESTEL users 56,000 Telecom Gold users
- National and International Telex
- Technical Support and Help Desk

PLUS: Access to PRESTEL and Telecom Gold, and there's much more – all for one low cost subscription. Modem owners call us now for an on-line demonstration.

With your first annual subscription MICRONET will give you a free modem. Complete and return the coupon for your MICRONET brochure.

MICRONET

MICRONET, Durrant House, 8 Herbal Hill,
London, EC1R 5EJ. Telephone 01-278 3143
Please send me a free MICRONET brochure.

Name _____

Address _____

Tel _____ Age _____

Micro _____

MU/11/87

EDUCATION REVIEW

◀ From Page 84

from room to room.

The main Typesetter! screen only shows part of the page and scrolling around it takes a bit of getting used to. But the Page Editor enables the page to be shown in 80 column format which means you can see across the whole width. You can enter text in this format, but real work should be done in the main section of the package.

The package supports a variety of printers. It didn't directly support the Epson-compatible I was using, but I found a setting that it was happy with and got a very nice print-out. You can alter the density of print – level four or five is recommended for Banda masters.

I found the suggestions for class work useful and imaginative – with ideas for introducing children to the package as well as for actually producing a newspaper. The ideas for further related projects overlap those for the Fleet Street Phantom but are nonetheless valid.

These packages are a useful and topi-



cal addition to any school's software library and from my experience very popular with the children. If you haven't got a printer the adventure game is still excellent. The pair could form the basis of a whole term's topic under many guises.

Elizabeth Denis

Product: Typesetter!

Price: £31.60

Product: The Fleet Street Phantom

Price: £18.40

Supplier: Sherston Software, 8 Court Street, Sherston, Malmesbury, Wiltshire SN16 0LL.

Tel: 0666 840433

The truth about TELEX

How much does it cost to go on Telex?

You could go the conventional way and buy a dedicated Telex machine. The cheapest will cost you £1,604 (the Whisper), the dearest £2,892 (the Cheetah). You will also need a separate telephone line, costing £101 to install, plus £404 a year rental. That's a total outlay over the first year of a minimum of £2,109. (All prices include VAT.)

Or you could do what more and more BBC Micro users are doing – use your BBC Micro to double as a Telex machine. And just use your ordinary telephone!

How do I turn my BBC Micro into a Telex machine?

All you need is a modem and appropriate communications software (see the advertisements in this issue), a telephone, and a subscription to MicroLink.

Telex is just one of a growing number of services available to micro users on MicroLink. You can also read the news as it happens, go teleshopping, create your own closed user group, send telemessages and electronic mail right round the world, download free telesoftware programs directly into your micro... and much more.

But why use Telex?

Because it's a standard means of instant communication between businesses. Today there are 150,000 Telex machines in use in Britain – and more than 2 million worldwide. It's used to dramatically speed up business communications – just as quick as using the phone but far more efficient, because you have a hard copy of every "conversation" for your records.

But there's a big bonus you get when you use MicroLink for Telex that the conventional way doesn't offer.

With MicroLink you don't HAVE to be in your office to send or receive Telex messages. You can just as easily use your computer at home (or even a portable). So now you can check whether there are any Telex messages waiting for you – anywhere, anytime. How's that for your business efficiency?

How to join:
See Page 71

New! SCRAPBOOK

A new free-format system for storage & retrieval of all types of information including colour and graphics. Incorporating two screen designers and facilities to search, sort, browse, print, extract etc. Forget fields, records etc. you store it how you want it.
Disc. (40 or 80 Track) and almost un-necessary manual £12.95 incl. P & P.

Instant On-Screen Help

All BBC models can now have On-Screen help with our range of ROMs and Discs. Switch to and from any COMPANION with only one command from Basic or Wordprocessor.

WORDWISE COMPANION

For Computer Concepts Wordwise and Wordwise Plus wordprocessors.

BASIC COMPANION

Instant help for getting to grips with BASIC programming.

PROGRAMMERS COMPANION

Colours, Graphics, Sounds, VDU codes, ASCII codes, *FX commands etc.

MACHINE CODE COMPANION

Assembly language help, OS routines, 6502 Instructions, Addressing Modes, Vectors etc.

All the above ROMs come with easy to follow fitting instructions £19.95 incl. P & P.
SPECIAL OFFER! Buy any TWO and get one FREE!

STEPPER MOTOR CONTROLLER

Control two stepper motors and a relay direct from BASIC with 20 new 'star' commands.

Ideal for plotters, turtles etc. With full instructions and program examples.

Combines the ease of use of Basic and the speed of machine code.

ROM with easy fitting instructions £14.95 incl. P & P.

STEPPER MOTOR INTERFACE

Boxed unit which plugs into the User Port to control two 12V stepper motors and a relay.

With an information leaflet on driving stepper motors.

VERSION 1. Powered from BBC auxiliary power supply. £23.00 incl. P & P.

VERSION 2. With mains Power supply (optically isolated) £46.00 incl. P & P.

Master and Compact Owners

Avoid the problem of limited ROM sockets. The above ROMs are also available in

ROM IMAGE form on disc ready for loading into sideways RAM.

40 or 80 track disc. (Please state) £8.95 incl. P & P.

Disc Versions

Disc versions of Basic, Programmers and Machine code Companions. £9.95 incl. P & P.

All three Disc Companions on one disc. 40 or 80 Track £19.95 incl. P & P.

Demonstration Disc

With interactive demonstration and samples from all four Companions. £1.00 incl. P & P.

Telephone (0686) 27549 For Details. (Anytime)

MICRO HELP



P.O. Box 17, NEWTOWN, POWYS, SY16 1ZZ.



Snapper King Harold retires

Harold has had enough! He can't get past 3500 at Snapper and the strain is telling. You wouldn't know from the photo that he's only 32 would you? If you call to look at our full range of BBC software and hardware, disc drives, monitors, printers, cables etc. Harold will shuffle about doing his best to help. Just don't ask for a demonstration of Snapper!

Number One in Bromley

Data Store

6 Chatterton Road, Bromley, Kent O1 460 8991

NOW ALSO AVAILABLE FOR THE MASTER COMPACT



a bar



The Music System

is the most advanced micro based music program for the BBC microcomputer

is sophisticated, yet smooth and simple to use features unparalleled create, edit, play and print tunes facilities

the Song & Sound Library immediately releases the flavour of both vintage and nouveau compositions

the acclaimed Instruction Manual uncorks all the secrets to its successful and easy use

LET THE MUSIC FLOW, LIMITED ONLY BY YOUR OWN TASTES AND IMAGINATION

BUY THE MUSIC SYSTEM TODAY!

DISC PACK: EDITOR • SYNTHESISER • KEYBOARD • LINKER • PRINTOUT • SONG AND SOUND LIBRARY • £29.95 INC VAT. PLEASE ADD £1.25 P&P PER ORDER.

CASSETTE 1: KEYBOARD • SYNTHESISER • SOUND LIBRARY • £9.95 INC VAT.

CASSETTE 2: EDITOR • PRINTOUT • SONG AND SOUND LIBRARY • £9.95 INC VAT. PLEASE ADD £1.25 P&P PER ORDER.

ADDITIONAL SONG LIBRARY DISC: 2 TOCCATA AND CAROLS • 3 400 YEARS OF MUSIC • 4 MAINLY BACH • 5 IAN WAUGH ORIGINALS • 6 OLD FAVOURITES • £4 EACH INC VAT, POSTAGE FREE.

NEW UTILITIES DISC: • KEYBOARD • MUSIC FILE CONVERTER • PLAY FROM BASIC UTILITY TMS MUSIC FILE CONVERTER • £6 INC VAT POSTAGE FREE • NOW WORKS ON BBC MASTER, B+ AND ALL DFS AND DDFS (INC. SOLIDISC AND WATFORD).

ECONET VERSION £89.70 INC VAT. PLEASE ADD £1.25 P&P, AMSTRAD AND COMMODORE 64 VERSIONS ALSO AVAILABLE.

ORDERS TO SYSTEM DEPT. B, 5th FLOOR, SHEATH HOUSE, SHEATH STREET, SHEFFIELD S1 2BP. Tel.: (0742) 768682

DEALER ENQUIRIES WELCOME



i. ISLAND • LOGIC
SYSTEM
SOFTWARE



NEW BATTLE OF BRITAIN

FROM
DESIGN PEOPLE SOFTWARE!

Battle of Britain is available on
cassette or 5¼" disc.

DISC £12.95 + £1.00 p&p

CASSETTE £9.95 + £1.00 p&p

COMING FOR CHRISTMAS

MIDWAY

in the BATTLEGAME SERIES

11th August 1940 . . .

Britain stands alone against the German war machine. In July, Adolf Hitler ordered his commanders to prepare plans for the invasion of Britain, named Operation Sealion. The German commanders insisted that they have air superiority over the Channel, or the Royal Navy could destroy the invasion force before it reached the shores of Britain.

BATTLE OF BRITAIN simulates the conflict that ensued. The player takes the place of the commander of the Royal Air Force, whilst the computer takes charge of the German forces. Under your command are the seven sector stations of Fighter Command. You receive reports from your radar stations on the coast, or if these have been bombed out of action, from the Observer Corps. Your forces are replenished from your fighter reserve and by production from aircraft factories — but you will lose both if the factories are bombed.

As if that were enough, bombing raids which penetrate your defences and reach your airfields will wreak havoc. All these and a host of other details are simulated by the Battle of Britain program. Unlike 'Sink The Bismarck' and 'Tanks', 'Battle of Britain' does not include 'combat sheets' as the numbers of planes involved are so large, though it does use disc overlay techniques to allow a larger program.


Reviews:

"Full marks for simulations like this — an intelligent use of the computer that is never boring and doesn't require you to be a wargaming fanatic to enjoy playing . . . I do believe that many more of you would enjoy playing Battle of Britain than you might suspect . . . I'm eager to see the next in the series!" *A&B Computing, October 1987*

HAVE YOU TRIED

BATTLEGAMES

Design People Software presents a unique series of battlegames for the disc-based BBC Micro. By using disc overlay and dynamic linking techniques, we are able to produce games which are much longer than the standard memory of the BBC. Our games are based on strategy, and we incorporate as many true-to-life facets of the action as possible. But you don't have to have reams of rules — everything is handled by the computer. But what makes our games different are the *combat sheets* — similar to mini-arcade games. You can take the place of the man on the spot, use your skills to influence chance.

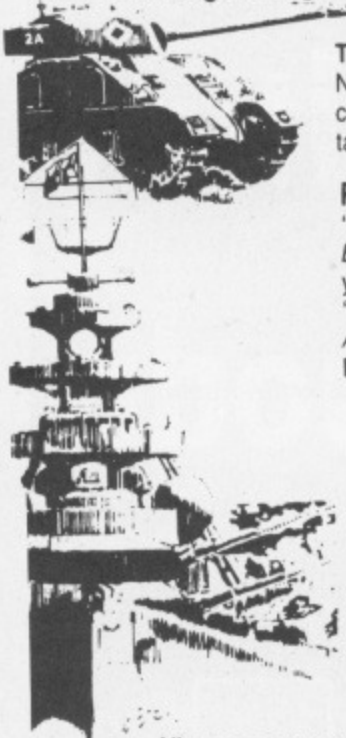

TANKS is a World War II tank battlegame for 1 player. You have a choice of three spheres of action — Western Europe 1944, North Africa 1942 and Russia, Winter 1943. The program handles all of the complex rules for playing wargames, leaving you to concentrate on the strategy. Your tactics must deal with enemy tanks, mines, aircraft and fortified positions, while keeping your own tanks refuelled and achieving your objective. **DISC £12.95 + £1.00 p&p**

REVIEWS:

"I don't know what the traditional wargaming fraternity will make of this, but I think it is excellent and, even more than *Sink The Bismarck*, will provide a wide audience to turn to a different sort of strategy game. I'm sure that this would appeal to far more of you than you suppose — try it and see!" *A&B Computing April 1987*

" . . . this game is one of the best warfare simulations available on the BBC Micro. Highly recommended without reservation".

Acorn User, July 1987

BBC B/B + /MASTER 128. 40/80 track dual format.

SINK THE BISMARCK is a simulation of the battle between the German super-battleship Bismarck and the Royal Navy. The game takes place over the whole North Atlantic. You have just twelve ships with which to find and tackle the Bismarck. But there are other problems too: U-boats, convoys to defend, and the ships' fuel reserves. **DISC £10.99 + £1.00 p&p**

REVIEWS:

"Sink The Bismarck has the perfect balance between pure strategy and an arcade game" *Micro User January 1987*

"If you've never tried a warfare simulation then may I suggest that this would be a good place to start?"

Well designed, playable and good value for a disc-based game." *A&B Computing December 1986*

BBC B/B + /MASTER 128 40/80 track dual format

All games are compatible with the BBC B,B+ and MASTER series. All orders will be despatched by return of post.

Design People Software, 77 Grimwade Street, Ipswich, Suffolk, IP4 1LN

EDUCATION LETTERS

Missing materials

THE two Soft-Teach Educational programs you reviewed in the October issue of The Micro User – *Rural Rambles and Seaside Strolls* – were, in fact, the “games” or “home” versions of our educational packages *General Map Reading and Coastal Map Reading*. These cost £20 + VAT each and are available to schools on 28 day approval.

They are designed for nine to 14-year-old children and include the manuals, teaching suggestions and other teaching materials that your reviewer found lacking in the version he had. – **A.P. Ramsay, Soft-Teach Educational, Deverill, Wilts.**

Concept creations

WE use a Concept keyboard for children to enter data into the BBC Micro at the primary school where I teach. Unfortunately, there is a lack of software to use with it. All the programs we use are modified by one of the staff in the school and we can't use some of our software with the Concept keyboard because his modifications don't work.

Do you know of any software written for the Concept keyboard or a foolproof way of modifying existing software? – **Damien Rogers, Truro, Cornwall.**

● There is no certain way to modify all software – what works on one program will clash with memory locations on another. Also, loading routines on commercial software will often wipe out your routines.

Chalksoft has just released two programs that work with the Concept keyboard. Moveaword is for children aged from four to seven who are just starting to read and Numbers and Pictures is for four to six-year-olds and offers structured number activities.

If any of our readers have

Keep your letters coming in – the education pages are here to reflect your interests. We want to hear your tips, ideas, experiences and suggestions. Send your contributions to:

Peter Davidson, Education Editor, The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport, SK7 5NY.

written short modifications for any educational programs we have already published in *The Micro User* and would like to share them with other teachers just send them in and we'll print them on the Educational letters page.

We'd also be very interested to see any educational programs that teachers or parents have written – especially if they cater for the Concept keyboard.

Electron conversions

I WOULD like to point out to other teachers that there are often educational programs published in *Electron User*.

They are easily converted to work on a BBC Micro and these, together with those published in *The Micro User*, form useful additions to the software library at the school where I teach.

Since April I have converted *Animals, Dragon's Doom, Hungry Horace and Lemonade* to run on the school's BBC Micro. It's been an easy task as the Basic is the same and only odd alterations like changing delays has been necessary.

While *The Micro User* is essential reading in all schools with a BBC Micro I think that teachers should take out a subscription to *Electron User* as well. – **David Leech, Reading, Berks.**

Software reference

I'M sure I can't be the only teacher in the world who has problems with children who press the wrong keys (deliberately or not) in educational programs.

The majority of software we use at school just goes to

pieces if the wrong key is pressed and I have to spend my time leaning over the shoulders of the group currently using the micro, instead of being able to get on with class work with the rest.

What's wrong with programmers, don't they know what children are like?

In addition, could you please publish a list of proven (by teachers in a school environment) software, with the age groups and ability ranges? – **Shelley Gibson, Dukinfield, Tameside.**

● We would very much like to compile a list of good software, but we'll need help. Please write in and tell us about any software that you've used and found useful in an educational environment.

We'll need details like the name of the software and the manufacturer, the age group/ability range it was used with plus any other notes specific to the circumstances it was used with.

We would also be interested to hear of any products that you've found useless when they've been used with children.

Rhyming dumps

I RECENTLY purchased the *Nursery Rhyme* software from Database. The graphics and sounds are outstanding and it's interesting to see traditional themes brought into the electronic age.

It seemed a pity that my class could only make use of the package once a week when we have access to the school's BBC Micro, so I tried to print some screens using the key triggered dump in *Watford Electronic's Dump Out 3*.

I just entered:

```
*GIMAGE EPS K
```


then loaded the *Nursery Rhyme* software with:

```
*RUN !Boot
```

because *Shift+Break* would have erased the *GIMAGE* command. I could then dump any screen by pressing *Control+Escape*.

I have now made worksheets by using several screens from *Hickory Dickory Dock* and the children enjoy colouring other pictures taken from the package.

I've even used parts of the screens to brighten up other worksheets I've produced. – **Moira Zimmatore, Balham, London.**

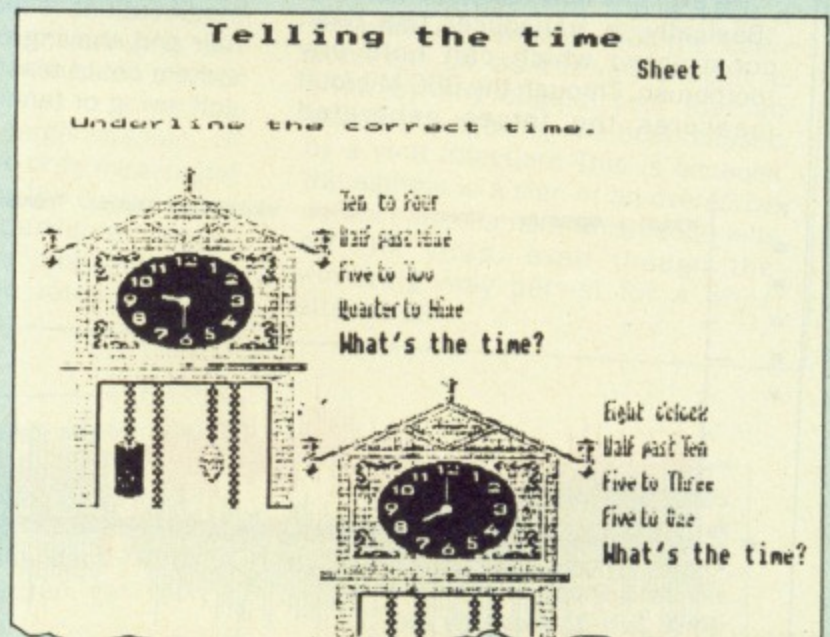

Reader Zimmatore's printout from *Nursery Rhymes*

THE MICRO USER



THE great variety of remarkable tasks to which readers are putting the BBC Micro becomes clearer each month, as the flood of entries in our competition to find the most innovative use of the machine grows towards the 1,000 mark. Health researchers, into

teeth and asthma, plus a design engineer working on missiles and two men offering spectacular entertainment feature in this random sample of the stories behind the competitors, all of whom are vying for a chance to win a £1,000 Archimedes.

Brushing up on research

RESEARCH which could cut down dental problems is being carried out on the North West around a BBC Micro.

Stockport research scientist Steve Kent explains that the B+ 128k in his laboratory monitors and analyses the forces used while brushing teeth.

"This may sound trivial but an important finding to date is that people do not compensate when cleaning teeth with a brush that is too hard. This means there is a good chance they are wearing away their gums".

Decay is no longer the reason for tooth loss; now it is gum disease and breakdown. The problem, Steve Kent has found, is that people are very habitual in this daily chore and so it is difficult to make them change their brushing style.

He explains how the system works. "Basically, a transducer has been constructed which can hold any toothbrush. Through the BBC Micro, it measures the forces generated

during brushing. "Data is collected via an A/D converter for three axes simultaneously. Individual files are created for each brushing and are stored for later analysis.


"As two axes are at right angles to one another it is possible to calculate the angle the brushing force is directed - 45 degrees at the gum line is the generally recommended angle".

The programs developed can also calculate stroke times, amount of work done and peak values.

It is possible to use this as feedback when there is a problem in co-ordination or difficulty in manipulation.

This can be related to design, efficiency and brushing skills, he says.

"Although the machine is being used to study toothbrushing, the system could also - with suitable modifications - look at the effect of hair and shaving products. A similar system could feasibly check out your golf swing or tennis stroke".

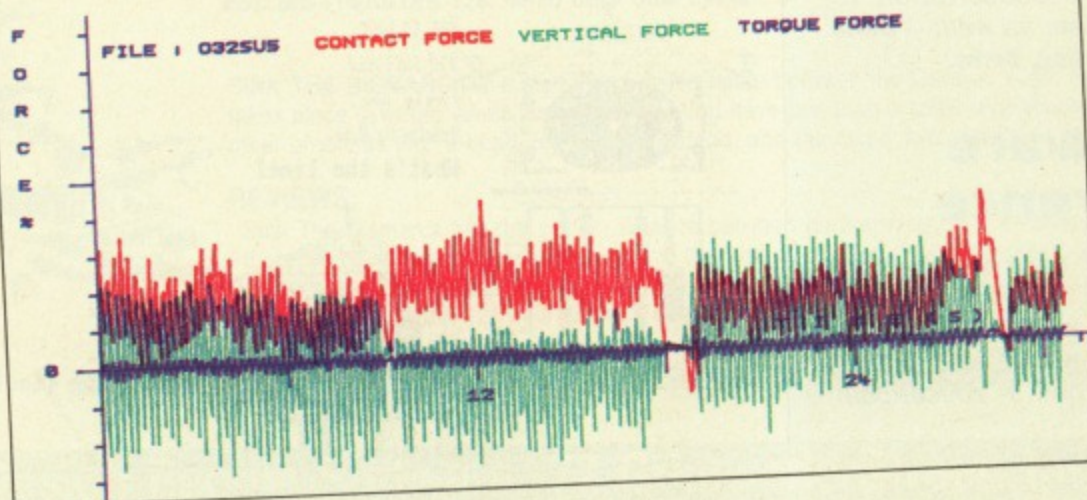

Laser show

THE sky's the limit for the BBC Micro - in the hands of maintenance engineers David and Derek Rose of Banbury. For they use the machine as a laser light show controller, providing spectacular displays.

The greatly expanded BBC Micro calculates and sends analogue signals to a remote laser scanning head which they built themselves.

The scanning head houses the laser and beam-pointing equipment which can draw any desired pattern or graphic by steering the laser beam along a path calculated by the BBC Micro.

The scanning device has a very fast response and is driven using a machine code program, making the projected graphic appear without flicker.

"Because the machine is so versatile and easily expanded, and so makes hardware and software development a fairly simple process, we can provide a laser show at affordable cost", say the Roses.

The machine code routines rotate, spin, tumble, grow, rove and animate the graphics to provide a dynamic effect.

"Messages can be typed and then scrolled across the projection area. "We hope to make this a full time business so that anyone coming across a 100-foot skeleton dancing in the sky in Banbury should not take fright - just think of the humble BBC Micro working away below".



March of the robots


STAFFORDSHIRE student Carl Hodges has produced a design for a humanoid robot, controlled by a BBC Micro. He has been designing robots for two years now and has successfully completed a working turtle.

His humanoid would be prepared in three stages. The program would be a control device for switching motors on and off according to feedback from the robot itself.

The interfacing would involve fitting new chips, an ultrasonic transmitter and receiver.

Within the robot would be a small pointer positioned between two plates. If the humanoid started to fall, the pointer would make contact, transmit the situation and trigger compensating motors. All this would enable the robot to complete a task without falling over.

"Hopefully, this might promote British engineers in the field of robots for fun or for serious applications", he says.

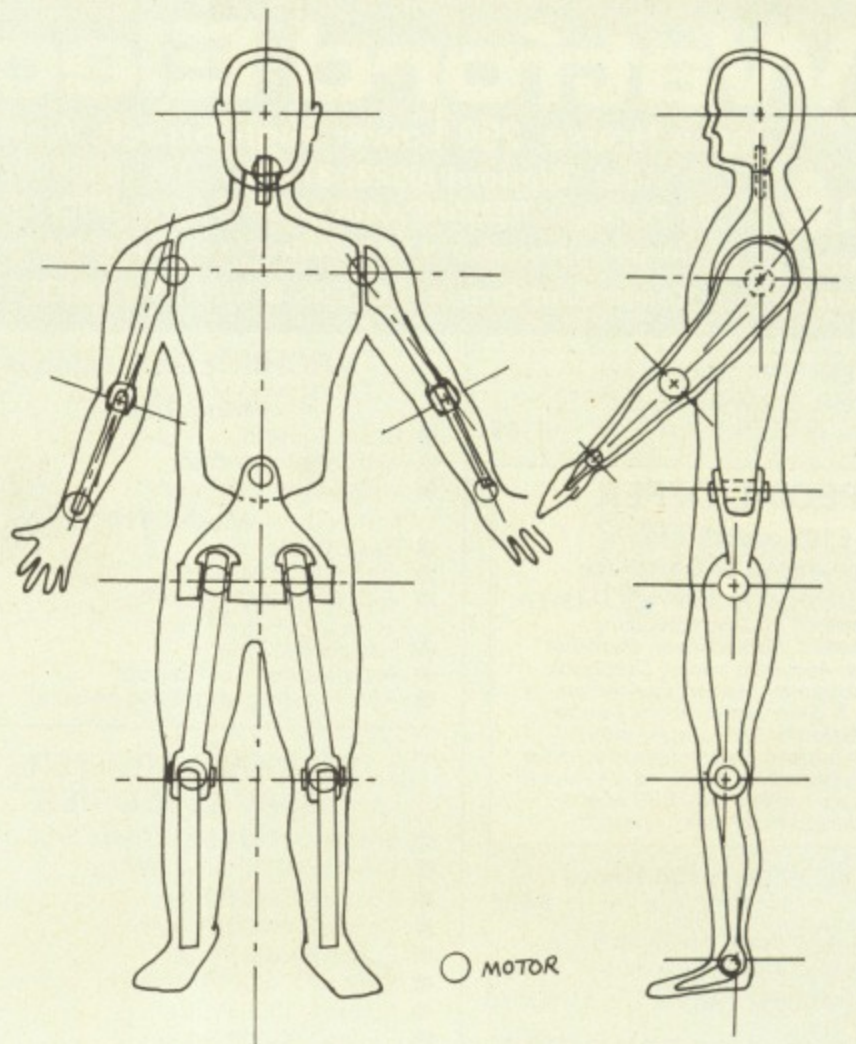

Error trap

COSTLY errors in the minute detail of missile design are being detected by a BBC Micro before actual testing takes place.

Mechanical design engineer Timothy Giles has worked out a new way of employing computer modelling to generate a mathematical representation of actual test environments.

He starts by preparing a mathematical model for the mechanism under development.

Raw data describing the environment in which it will work is then fed into the BBC Micro after which a conversion program translates it into a meaningful form and stores it on disc.

Modelling software then accesses this data and uses the actual test levels for performance analysis.

"The beauty is", says Timothy Giles, "that additional environmental conditions which cannot be achieved by a test laboratory can be defined mathematically and added to the model."

"This achieves a simulation closer to actual use than any other method. Test failures can be examined by the program to determine the cause. The

effects of design changes can also be carried out.

"The system has proved cost effective in accurately predicting performance of the mechanisms before actual tests are carried out", he explains.

Research into asthma

CHILDREN's doctor John Storr believes his BBC Micro-based research has produced some entirely new findings into the causes of asthma.

The illness appears to be on the increase, says Dr Storr, and has become a frequent reason for admitting children into hospital.

"One area which has been particularly fruitful, and which would be quite impossible without the help of a computer is the analysis of the large volumes of data that are collected by the NHS for managerial purposes.

"The data I have been looking at are very simple, consisting of the ages and dates of admission of children with asthma.

"By processing large volumes of data it is possible to draw meaningful conclusions such as the clustering of admissions on particular days, seasonal and other long term variation in admission rates and the

overall tendency for admissions to increase".

He says that one result of the work is the entirely new finding that asthma admissions show a strong association with school holidays.

"I have shown that this is a result of the effect that school holidays have on the spread of virus infections in the community. New strains of virus are imported by children returning from holiday, and when these spread among the school population the asthmatic children become wheezy.

"This achievement shows what a remarkably powerful tool the computer can be, as it is very difficult to show by any clinical test that an attack of wheezing has been caused by a viral infection. This is because the asthma is a sign of an overactive defence mechanism which soon kills off the virus, even though the wheezing may persist for a while afterwards".

The winner of this prestigious award will be announced at the Electron & BBC Micro User Show, opening at the New Horticultural Hall, Westminster, on November 13.

Watford Electronics

Jessa House, 250 Lower High Street, Watford WD1 2AN, England

Tel: Watford (0923) 37774 Tlx: 8956095 Fax: 01 950 8989

BY POPULAR DEMAND OUR SHOP IS NOW OPEN UNTIL 8PM EVERY THURSDAY

All prices exclusive of VAT; subject to change without notice & available on request.

Credit Card Orders (ACCESS & VISA) Tel (0923) 33383 or 50234 (24 Hours)



Acorn
The choice
of Experience

The choice after
the Experience

BBC MASTER 128K Micro incl.
Acorn's: View, Viewsheet, ADFS,
BASIC Editor & TERMULATOR **£389**

SPECIAL OFFER

**FREE ... £105 worth of
Hardware & Software**

Gemini's OFFICE MATE & OFFICE MASTER packages on Disc consisting of: Database, Spreadsheet, Beebplot graphics. Accounts packs: Cashbook, Final Accounts, Mailist, Easyledger, Invoice & Statements, Stock Control and Watford's 3 1/2", double sided 1 Megabyte (unformatted) single disc drive complete with cables, ready to connect to the micro - with every BBC Master purchased from us this month.

BBC MASTER with Turbo Board **£486**

512K Processor Add on Board
"inc. Mouse and GEM package" **£195**
BBC AIV (Domesday) System **£4479**

ADD-ONS & ACCESSORIES

Turbo 65C102 Add-on Module **£99**
BBC MASTER ET
(Econet Terminal) **£315**
Econet Module for the Master **£43**
Twin ROM Cartridge for Master **£8**
Quad ROM Cartridge for Master **£12**
Universal Processor Adaptor **£75**
Reference Manual I (No VAT) **£14**
Reference Manual II (No VAT) **£14**
Advance Ref. Manual (No VAT) **£19**
64K Upgrade Kit for B+ **£32**
Acorn 1770 DFS Kit complete **£42**
ECONET Upgrade Kit for BBC **£42**
ALL ECONET UPGRADES Available
Z80 Acorn 2nd Processor package **£325**
ARIES' Professional IEEE Interface **£238**
Acorn IEEE Interface Complete **£265**
Morley Teletext Adaptor **£104**

BBC MASTER COMPACT

All Master Compact Microcomputers are supplied complete with an integral 3 1/2" Disc Drive and various educational and professional bundled softwares.

System 1 Standard Package **£295**
System 1A System 1 + TV Modulator **£310**
System 2 System 1 + Green Hires Monitor **£340**
System 3 System 1 + Medium Res Colour Monitor **£475**

RS232 Kit for BBC Compact **£26**
Additional 3 1/2" Drive for BBC Compact **£99**
(Securicor carriage £7)

The 80186 Co-Processor

This package consists of the Master 512 board, Watford Co-Pro Adaptor, Acorn 1770 Disc Upgrade and Acorn ADFS. The Master 512 board using the 80186 16 bit Processor at 10MHz and running Digital Research DOS Plus, gives a high degree of IBM compatibility at an extremely reasonable price. Included in the 512k package is a mouse and the amazing Digital Research GEM suite of software; GEM Paint, GEM draw and GEM desktop giving a complete Mouse Icons environment (All other GEM packages will work on the 512k). Famous packages that will work with the 512k board include Wordstar, Dbase II, Lotus 123 and many others. The only requirement to upgrade any BBC Model B to this system is you must have twin 80 track disc drives.

£275

ARCHIMEDES Micros

Model 305

- Basic System **£799**
- with Green Monitor **£849**
- with Colour Monitor **£999**

Model 310

- Basic System **£875**
- with Green Monitor **£925**
- with Colour Monitor **£1075**

- Podule Backplane **£39**
- Archimedes Ref Manual **£20**
- ARM Assm. Lang. Prog Manual **£12**

VARIOUS PRINTERS & ACCESSORIES

- Brother HR15 RS232 Daisy Wheel **£275**
 - Brother HR20 Daisy Wheel **£349**
 - Epson EX800 Printer **£399**
 - Epson EX1000 Printer **£545**
 - Epson FX800 Printer **£315**
 - Epson FX1000 Printer **£439**
 - Epson LQ800 Printer **£429**
 - Epson LQ1000 Printer **£585**
 - Epson LQ2500 Printer **£790**
 - Epson LX86 Printer **£189**
 - Epson LX800 Printer **£199**
 - Epson SQ2500 Printer **£899**
 - Epson Paper Roll Holder **£17**
 - EX800/1000 Colour Option **£55**
 - EX800/1000 Colour Ribbon **£18**
 - FX80/86 Tractor Feed Unit **£35**
 - FX/LQ/LX800 Single Sheet Feeder **£135**
 - FX/LQ1000 Single Sheet Feeder **£149**
 - Hi-80 Refills - Set of 4 Pens **£7**
 - LQ800 Tractor Feed Unit **£39**
 - LX80/86 Tractor Feed Unit **£20**
 - LX80/86 Single Sheet Feeder **£49**
 - Hitachi 672 Colour Plotter **£495**
- (Securicor Carriage on Printers £7)

EPSON PRINTER INTERFACES

All these interfaces fit inside the printer.
RS232 **£27** RS232 + 2K Buffer **£55**
IEEE 488 **£65** RS232 + 8K Buffer **£75**

PRINTER SHARERS

(Ideal for School environment)

| | | |
|---------------------------|--------|------------|
| Connects | Serial | Centronics |
| 2 BBC Micros to 1 Printer | £25 | £26 |
| 3 BBC Micros to 1 Printer | - | £58 |
| 6 BBC Micros to 1 Printer | - | £99 |

Connect 3 BBC Micros to 1 Printer **£60**
Connect 6 BBC Micros to 1 Printer **£99**

PRINTER CHANGER

3 Printers to 1 Micro (Centronics) **£65**
(Cables extra, specify type required when ordering)

65C102 2nd PROCESSOR

This amazing package consists of the Acorn 65C102 'Turbo' Board, the Watford Co-Pro Adaptor and Acorn 1.2 DNFS ROM. The 'Turbo' board, running at 4MHz with 64k of additional RAM will increase the speed by between 50 and 200% depending on the application running, and allow a BASIC program of upto 44k in any screen mode. Simply by plugging in the Co-Pro and the DNFS ROM with its special Tube host code and you massively increase the power of any Model B.

£139

KAGA/TAXAN PRINTERS

(IBM/Epson compatibles)

| | |
|---------------------------------|-----------------------|
| Kaga KP815 Printer | £269 (carr £7) |
| Kaga KP915 Printer | £350 (carr £7) |
| RS232 Interface | £49 |
| RS232 Interface with 2K Buffer | £69 |
| RS232 Interface with 16K Buffer | £89 |

PRINTER LEADS

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA, Panasonic etc. printers.

| | |
|-----------------------------------|---------------|
| Standard length (4 feet long) | £6 |
| Extra long (6 feet long) | £8 |
| Compact's Special Centronics Lead | £9 |
| RS232 Cable | P.O.A. |
| IBM Parallel 1 metre Cable | £9 |

PRINTER RIBBONS & VARIOUS DUST COVERS

| Type | Ribbons | Dust Covers |
|---------------------|---------------|--------------|
| BBC Micro | - | £3.50 |
| BBC Master | - | £4.00 |
| Brother HR15/20 | £3.00 | £5.00 |
| EX/LQ800 | £7.50 | £4.50 |
| EX/LQ1000 | £8.00 | £5.00 |
| FX80/85/800/MX80 | £4.50 | £4.95 |
| FX100/1000 | £7.00 | - |
| Kaga KP810/815 | £5.25 | £4.00 |
| LQ2500 | £9.00 | £5.50 |
| LX80/86/800 | £4.00 | £4.50 |
| M1009/GLP | £4.00 | £3.00 |
| Panasonic KX1080/81 | £4.50 | £4.75 |
| SQ2500 | £25.00 | £5.50 |
| Microvitec Metal | - | £5.50 |

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

Listing Paper (Perforated)

| | |
|---|------------|
| 1,000 Sheets 9 1/2" x 11" Fanfold Paper | £7 |
| 2,000 Sheets 9 1/2" x 11" Fanfold Paper | £12 |
| 1,000 Sheets 15" x 11" Fanfold Paper | £9 |
| 1000 Sheets true A4 Fanfold Paper | £11 |
| 2000 Sheets true A4 Fanfold Paper | £20 |
| Teletypewriter Roll (Econo paper) | £4 |

Carriage 1K Sheets £2.50. 2K Sheets £3.00

PRINTER LABELS

(On continuous fanfold backing sheet)

| | |
|------------------------------|--------------|
| 1,000 90 x 36mm (Single Row) | £5.00 |
| 1,000 90 x 36mm (Twin Row) | £4.90 |
| 1,000 90 x 49mm (Twin Row) | £7.50 |
| 1,000 102 x 36mm (Twin Row) | £6.25 |

Carriage on 1,000 Labels £1.00

SPECIAL OFFER

EPROMs for BBC's Sideways ROMs.

2764-250ns £3.00

27128-250ns £3.50


RAMs (Low power) for ATPL, WATFORD, etc., Sideways ROM Boards

6264LP (8K) £2.50

2 x 6264LP (16K) £4.80

Panasonic KX-P1081

(Now IBM/Epson Compatible)

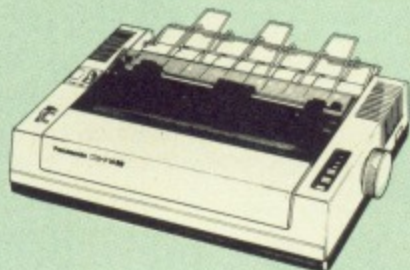

Available NOW at a superbly realistic price, the KX-P1081 perfectly balances features, quality of construction and Value for Money to produce the printer of tomorrow, here today, ready to sweep the current generation of machines away.

Ingenious innovation in terms of software control codes permits great flexibility when it comes to defining the print style. A nippy 120 cps of clear Draft text backs up the crisp 24 cps Near Letter Quality text mode, with upto 40 superbly useful downloadable characters. A delightful range of assorted character widths is efficiently supported, with sizes ranging from a broad 5 cpi to petite 17 cpi, EVEN in NLQ mode. Some of the extensive support for serious use includes specialised functions to perform justification, centering and even left and right ranging. Proportional spacing permit even greater freedom when it comes to advanced use. Not only is the full Epson RX compatible control code set implemented, but extra codes have also been added to cater for the NLQ options, etc.

A full 96 ASCII character set is supported, with an extended set of 32 international characters and IBM special characters as well as IBM block graphics characters. A 1K Print Buffer alleviates much of the wait time normally associated with printing, whilst the bi-directional logic seeking print head takes the quickest route to print as required.

(Price includes, FREE a 4ft Printer Lead, and a Dump Out 3, Screen Dump ROM worth £35 with every printer purchased from us).

Special Price: **£149** (carr. £7)

Optional RS232 Interface: **£39**

Panasonic KX-P3131 Daisy-Wheel Printer

This low-cost high-performance Daisy Wheel printer is ideal for anyone wishing to produce clear, immaculate letters or reports. It delivers, flawless text at 10, 12 & 15 CPS. Supports proportional spacing. Is Bi-directional. logic seeking. Printing speed: 17CPS. Has 6k printer Buffer. A printer of similar spec could cost a lot more than our ridiculously low price of:

Only **£245** (carr. £7)

| | |
|---------------------|--------------|
| Single Sheet Feeder | £195 |
| Tractor Feed | £90 |
| Spare Ribbon | £3.00 |

Acorn-Olivetti JP101 Ink Jet Printer

One of the main problems with most printers is that they are hopelessly noisy. How often have you wanted to print something late at night but not done so for fear of waking the children? Also ideal for those working in quiet environments such as libraries, etc. Silence the complaints with the serious solution from Watford at the amazing cost of only **£59**

(Offer valid while present stocks last)

JP101 accepts 9½" standard fan fold paper or single A4 sheets. Tractor & Friction feed supplied as standard - print speed 50 cps.

Pack of 4 refills **£10**

Screen Dump ROM for JP101 **£10**

Anti-Glare VDU Screen

This extremely effective, easy to install, 12" VDU screen eliminates harmful glare, improves contrast on colour monitors. Increases productivity in offices. A must for all wordprocessor users.

£12

SWIVEL BASES


for Video Monitors



By placing your monitor on one of our superb swivel bases, you gain the freedom to adjust the monitor viewing angle to suit your needs. By doing this, you alleviate eye strain and reduce back stress. Front adjustable without lifting the monitor. (See drawing on left).

for 12" Monitors **£10** (carr. £2.50)
for 14" Monitors **£14** (carr. £2.50)

Printer Stand



This new professional printer stand takes hardly more space than your printer. Due to the positioning of the paper feed

and re-fold compartments ie. one above the other, the desk space required for your printer functions is effectively halved. Additional facilities include: Easy access to paper from both sides, used with both top and bottom feed paper and with its dial controlled paper feed system with adjustable deflector plates it ensures smooth paper flow and automatic refolding.

£26



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop. All Monitors are supplied complete with connecting lead.

MICROVITEC 14"

- 1431 - Medium resolution as used on the BBC television computer programme **£175**
- 1451 - High resolution, suitable for word processing in mode 0 **£225**
- 1441 - High res, exceeds the capabilities of the BBC micro **£359**
- 1431AP RGB + PAL and AUDIO **£199**
- 1451AP RGB + PAL and AUDIO **£255**
- Dust Cover for Microvitecs **£5.50**
- Touchtec 501 Touch Screen **£239**

KAGA-TAXAN 12"

- TAXAN KX117 Hi-res Green Monitor **£75**
- TAXAN KX118 Long persistence Hi-Res Green Monitor **£85**
- TAXAN KX119 Ultra-Hi-Res Amber Monitor **£90**
- TAXAN Super Vision 2 Type 620 Hi-res RGB Colour monitor. Ideal for Wordprocessing **£269**
- TAXAN Super 3, Type 625 Ultra Hi-res, RGB Colour) Text mode switch allows monochrome text display in Green, Amber, White reverse or White on Blue **£319**

ZENITH

"Test Bureau Recommended for use in Education"

12" high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. (These are the same professional quality, stylishly finished monitors as used in the larger Zenith PC Systems.)

Green (New Design) Hi-res **£69**
Amber (New Design) Hi-res **£74**

LEADS

BNC Lead for Zenith or Philips **£3**
Skart Monitor Lead **£5**
RGB lead for KAGA **£3**

N.B. carriage on Monitors **£7** (securicor)

MEGABUFFER 256



This new Megabuffer 256 from Watford is a full featured 256K Printer Buffer. It allows the computer to print 256,000 character in a short time thus freeing the computer very quickly. In short it makes light work of printing large documents, screen dumps, etc. It is extremely simple to connect. The features are:

- Low Cost, High performance.
- Improves efficiency by making more efficient use of computer and printer.
- Compatible with any computer and printer that uses Centronics Parallel connections including all BBCs, IBM PCs, etc.
- Total compatibility with all software.
- Cheaper phone bills when using your Modems.
- Ideal for those doing large graphics, screen dumps that are slow to print.
- Multi-Copy facility allows you to print several copies via Megabuffer without going through your computer.
- Data Dump facility is included.
- Built in test unit for both the buffer & your printer.

In conclusion it can safely be said that MEGABUFFER 256 is the ultimate printer Buffer for both the amateur and professional user.

Only **£125** (carr. £3)

CO-PRO Adaptor



Now for the first time you can add the Master Co-processor boards, to your standard BBC model B, or B Plus. With this brand new launch from Watford Electronics you can attach any BBC Master co-processor to the original BBC Micro. Once again Watford strides ahead with a new concept in BBC B Micro add-ons. This unique external Co-Pro Adaptor, is protected by patent applications.

Use the super fast Turbo Board with your BBC B, it is much faster than the 6502 2nd processor superseding it.

With the 512K addon your standard BBC machine achieves IBM PC compatibility at a realistic price running GEM, Lotus 123 and many other programs. Included with the 512k package is a high precision mouse and the Digital Research GEM suite of software; GEM Desktop, GEM Write GEM Paint. This requires both the 1770 DFS and the ADFS to be fitted to your computer.

To use other co-processors you require a BBC B with DNFS 1.20 or higher, or BBC B+ fitted with 1770 DFS 2.20 or greater. Co-processors work exactly like a second processor.

Master owners may use Co-Pro to add a second Co-processor externally.

Watford, brings power to your BBC at only:

£50.00 (carr £5)

Continued →

THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED (BOOK)

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON FX-KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English, how to use and make the most of your KP810, PW1080A or any other Epson FX80 compatible Printers like Panasonic KX-P1080/1, etc., with the BBC Micro, both from BASIC and Wordwise.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

£5.95 (No VAT)

NOW WITH EXTRA FEATURES AT NO EXTRA COST - Watford's latest DFS 1.44

- Incorporates Acorn's Official Tube Host Code so that those with 2nd processors no longer need to waste a ROM socket on the DNFS.
- Option to DOUBLE the speed of BPUT and BGET.

If you already have the Watford Electronics DFS and wish to incorporate these new facilities then simply return your existing DFS ROM to us together with £5 remittance for an upgrade. Please pack the ROM securely and address the package to our Upgrades Dept.

WATFORD'S & ACORN'S SINGLE DENSITY DFS

Watford's popular and widely acclaimed DFS has now been available for four years, and has gained a large following amongst serious users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade. (P.S. Watford's highly sophisticated DFS is fully compatible with Acorn DFS). (not Acorn's 1770 DFS)

- Complete Disc Interface Kit including DFS ROM and fitting instructions £46
- Acorn's 0.90 DFS Kit complete £45
- DFS Manual (Comprehensive) (no VAT) £6.95
- (P.S. Our comprehensive DFS Manual covers both Acorn & Watford DFSs).
- Watford's sophisticated DFS ROM only £16
- We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only £12
- DNFS ROM only £17 ● ADFS ROM only £25
- Watford's DFS is exclusively available from Watford Electronics and their appointed dealers only. Every ROM carries a special label with LOGO and serial number.

NEW WATFORD'S Mk II Double Density DFS INTERFACE

Many of our customers have wanted to use our superior DDFS and Acorn ADFS together. Now our DDFS board has been adapted to allow the use of Acorn ADFS.

- Added features include:
- Acorn ADFS compatible - Use ADFS on our DDFS board.
 - Tube host Code - No longer any need to have the DNFS in your machine to use Co-Processors, even the CoPro and Master 512.
 - Auto 40-80 Track sensing - no need to fuss with 40/80 track switches (even works with protected disks).
 - An extremely powerful 8271 emulation - ensuring compatibility with almost all software.
 - New low profile - small footprint board.
 - Fits with all third party ROM boards.
 - Option to double the speed of file handling operations - BPUT and BGET.
 - Operates in both single and double density modes.
 - OSGBPB has been recoded, increasing still further the speed of file handling.

Please note that not all DDFS's are capable of providing either the full 80% storage increase or of allowing a file the full size of the disk - Ours allows both of these!

If you already have a DDFS (any manufacturer), and wish to upgrade to our MkII version, then simply return your existing ROM and DDFS board and we will supply the new DDFS for only £25.00.

- Special introductory offer £39.00
- DDFS Manual (No VAT) £6.95
- We will exchange your existing DFS Kit for our sophisticated DDFS for only £25.00

Please note, as the MkII DDFS is a hardware and software upgrade, it is not possible for existing Watford DDFS users to simply exchange their ROM for the new version.


SPECIAL DISC DRIVE/DDFS OFFER

Type CLS400



- The popular Mitsubishi 400k Single Disc Drive, Double Sided, cased with Cables. Plugs directly to your Micro.
- Watford's popular DDFS Disc Interface (allows 720k storage). Will run in both Single and Double Density modes 40/80 track Software switchable.
- A comprehensive User Friendly Manual.

A Bargain at Only £125 (£6 carr)
(Offer valid while stocks last)



3 1/2" DISC DRIVE OFFER

These top quality 3 1/2" Disc Drives are attractively finished in BBC beige and are supplied complete with Cables. They run directly from the BBC B/Master's own PSU.

- Single 400K Drive £69
- Twin 800K Drives £126

MYSTERIES OF DISC DRIVES & DFS REVEALED (BOOK)

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

Then The Mysteries of Disc Drives and DFS Revealed is the book for you. It explains in detail the different types of systems available, how they are installed and how to use them. Many examples are given including pre-written programs to call various functions of the DFS available only through Operating System calls. Different types of disc, 40/80 tracks etc. are all explained. This book is ideal for the beginner confused by the plethora of choice available in the marketplace.

£5.95 (Book No VAT)

DISC ALBUMS

Attractively finished in antique brown leather look vinyl. Stores upto 20 Discs. Each disc can be seen through the clear view pocket.

£4

FLOPPY HEAD CLEANER KIT



The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to use. Available in 3 1/2" & 5 1/4", please specify.

£7

ANTISTATIC LOCKABLE DISC STORAGE UNITS

Gives double protection - Strong plastic case that affords real protection to your discs. Antistatic helps avoid data corruption whilst in storage. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.

- M35 - holds upto 50 5 1/4" discs £6.50
- M85 - holds upto 95 5 1/4" discs £8.00
- M25 - holds upto 25 3 1/2" Discs £5.50
- M50 - holds 50 3 1/2" Discs £7.50



PLASTIC LIBRARY CASES


Holds up to 10
5 1/4" Discs.

Only £2.00

PLONKER BOX

When using ones micro, there is a tendency to have more than one Disc on the desk. This exposes them to the hazards of fingerprints, scratches, dust, coffee and an untidy desk. Why not protect your valuable data from all these hazards with the help of our extremely handy and low cost PLONKER BOX. It holds up to eight 5 1/4" Discs.

Protection at Only: £2



DUST COVERS (For our Disc Drives)

- Single CLS (without PSU) £3.20
- Twin CLD (without PSU) £3.85
- Single CS (with PSU) £3.95
- Twin CD (with PSU) £3.90

Quality Disc Drives from Watford

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates capacity in single density mode. That within the brackets is the capacity in double density mode. All disc drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track (non-tinted) and which are 80 track (tinted). All our 80 track drives are already fitted with a 40-80 select switch.


All our Disc Drives are Double Sided and will operate in both Single and Double Density modes. Extensive experience of the usage of disc drives suggests that the JAPANESE drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.

Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packages" label other manufacturers drives with their own name). We buy the high quality JVC and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate (extensive tests within our workshops have confirmed this). All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. Ideal for Schools & Colleges. We are now able to supply all single disc drives with Power Supply, in either single or dual case. (Dual case has a twin data cable and a power supply capable of driving two disc drives) allows easy expansion to a dual drive unit, at a later date. Prices stated in the pricing boxes below are for single drives in standard single cases. Single drives in a dual case cost an extra £5. (At Watford we anticipate your needs of tomorrow, not just today!)

When using a BBC Micro, most people find themselves short of desk space. The Watford's BBC Micro plinths form an ideal way of recovering some of this precious space) your BBC, Disc Drive and Monitor can all occupy the same vertical footprint and still be comfortably situated. With the Watford Double plinth, your Disc Drive is mounted vertically at one side, leaving a very valuable area directly in front of you for such useful items as spare discs, pen, paper, reference manuals, etc. Follow the trend with Watford plinth. (Turn to the 6th page of our advert for the Plinths). P.S. All our 5 1/4" Disc Drives with PSU are compatible with the Compact Micro. All you require is the special Compact Disc Drive Cables designed by us.

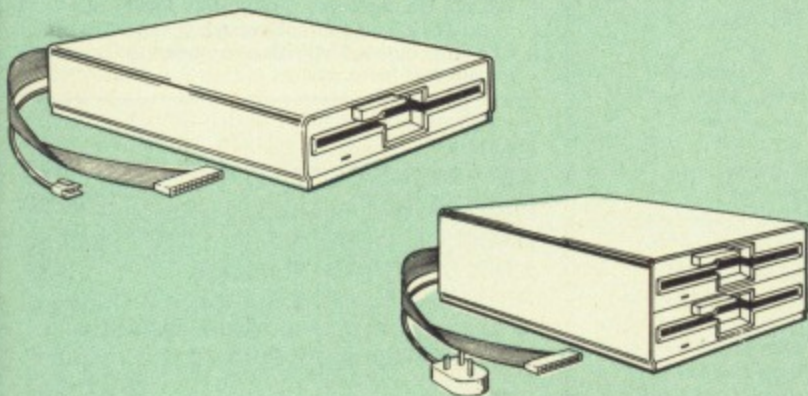

| Capacity | Drives without P.S.U. | | Drives with P.S.U. | |
|-----------------|-----------------------|------------------|--------------------|-----------------|
| | Single | Twin | Single | Twin |
| 200K (360K) | CLS 200 £90 | | CS 200 £102 | |
| 400K (720K) | CLS400S £92 | CLD 400 £175 | CS 400S £103 | CD400 £196 |
| 800K (1.44M) | | CLD 800S £179 | | CD 800S £198 |

● TWIN Disc Drive Case, complete with Power Supply & Cables £43
Securicor carriage on Disc Drives £5 to £6

Prefix C = Cased Drive
L = Less PSU
S = Single
D = Double

Suffix S = 40-80 Switchable

e.g. CLS400S = Cased Disc Drive, Less power supply unit, single 5 1/4" 400K, (720K in double density); Double sided; 40/80 track switchable.

Cable to connect 5 1/4" Disc Drives to BBC Compact
Single £9 Twin £12
Special Cable to connect both 3 1/2" and 5 1/4" Disc Drives
simultaneously to the BBC Compact £13

3M - DISKETTES

3M - SCOTCH Diskettes with Lifetime warranty from Watford Electronics your 3M Appointed Distributor.

- 10 x 5 1/4" S/S D/D 40 Track Diskettes £8.50
- 10 x 5 1/4" D/S D/D 40 Track Diskettes £10.50
- 10 x 5 1/4" S/S D/D 80 Track Diskettes £13
- 10 x 5 1/4" D/S D/D 80 Track Diskettes £13
- 10 x 5 1/4" 1.6M D/S D/D High Density Discs for IBM XT and AT £28
- 10 x 3 1/2" S/S D/D 40/80 track Discs £15
- 10 x 3 1/2" D/D D/D 40/80 track Discs £19.50

TOP QUALITY 3 1/2" & 5 1/4" DISKETTES

To complement the range of quality discs and disc drives that WE already sell, WE are now supplying some special offer packs of 10 high quality discs. Each Disc has a reinforced hub ring and carries a lifetime guarantee. These are supplied complete with selfstick labels and packaged in an attractive plastic library disc box to protect them from damage. We strongly recommend these Discs.

DON'T SETTLE FOR LESS, BUY THE BEST

- 10 x M3 3 1/2" D/S D/D 80 Track Discs £18
- 10 x M4 5 1/4" S/S D/D 40 Track Discs £7
- 10 x M5 5 1/4" D/S D/D 40 Track Discs £9
- 10 x M7 5 1/4" D/S D/D 80 Track Discs £11
- 3" Double Sided Discs £3 each

Special BULK OFFER on 5 1/4" DISCS

(Supplied packed in Anti-Static Lockable Storage Units)
(Lifetime warranty on Discs)

BULK PACK DISCS in lots of 100

| Type | S-S 40T | D-S 40T | D-S 80T |
|-------------------|---------|---------|---------|
| ● Without Sleeves | £35 | £39 | £45 |
| ● With Sleeves | £38 | £42 | £48 |



ACORN WINCHESTER DRIVES

Supplied complete with Level 3 Econet File Server software.
20 Megabytes £699; 30 Megabytes £1549


WATFORD'S WINCHESTER DRIVES

- 10 Megabyte Unit with ADFS £399
- 20 Megabyte Unit with ADFS £499
- 40 Megabyte Unit with ADFS £749



CDP800S

CDPM800S

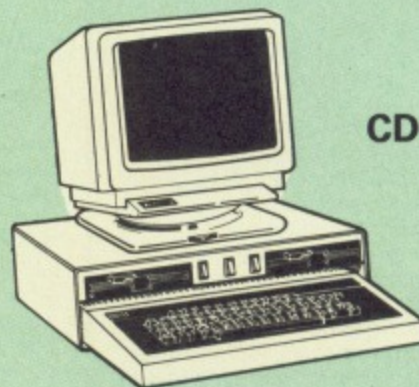


Twin 800K Double sided 40-80 track switchable disc drives mounted in an attractively finished Beige colour plinth for the BBC Micro. Supplied complete with integral power supply, cables and Utilities disc. The switches are mounted on the front panel for ease of use.

CDP 800S for BBC Micro £199
CDPM 800S for Master £205

(Securicor Carr. £7)

ACORN'S Twin 800K Disc Drives

Specially mounted side by side in a Master Plinth. Supplied complete with Cables. Plugs directly to the Master Computer.

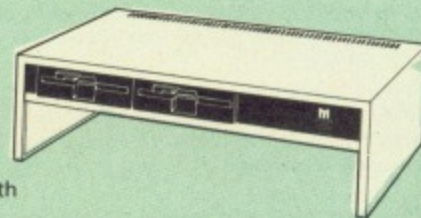

RRP £250 Our Price: Only £189 (carr £7)

NOMINATED FOR



QUEST MOUSE

The ultimate in Mouse technology, the Watford Electronics Quest Mouse must be the most powerful Mouse package yet produced for the BBC Micro. Featuring state of the art 32K ROM software the Quest Mouse package is filled with features essential to the budding artist. The Quest Mouse is a high precision, low profile and large footprint mouse. It has three large comfortable buttons and is smooth and easy to use on most work surfaces. The Quest Mouse is FULLY HARDWARE COMPATIBLE with the AMX MOUSE so that programs such as AMX Pagemaker etc, will work with it.

The two parts of the Quest package are available separately so that existing Mouse owners can upgrade to the Watford's sophisticated Quest Paint software or replace their existing worn out mice for a minimum cost.

QUEST PAINT

The Quest Mouse software is supplied on a PALPROM unit to allow the sophisticated 32K program to be used from a single ROM socket. It is compatible with the BBC B, BBC B Plus and BBC Master Series machines.

The software is used to draw high resolution Mode 1 pictures in full colour. All menu selection and control of the drawing process is performed with the mouse so that you will hardly ever touch the keyboard.

SOFTWARE FEATURES

The software is far too powerful for us to describe it fully in such a small space. Below is a list of the various features. Please write to us for a fully descriptive leaflet.

Disk interface not required. Utilities disk has facility to create and print big screens. Colours applied can be solid, either pattern of user defined pattern. Drawing can use brush or airbrush. Brush shapes can be defined and stored. Airbrush sprays colour/pattern randomly with four jet sizes and even or center spread. Colour cycles. Colour protection to stop particular colours from being overwritten by selected drawing actions. All standard drawing facilities like: rubber, straight pencil lines, triangles, circles, ellipses, rectangles, parallelograms, polygons, etc are provided. All shapes can be solid or just a boundary line. Once a shape has been set up it can be repeated anywhere on the screen. Global colour replace in a rectangle. Powerful fill facility for areas and vertical/horizontal lines. Full cut and paste of rectangular areas with rotation and size with screens from Watford Beeb Video digitiser. Load and Save screens with colour pallet information, save brush and pattern definitions etc.

Take The Guesswork Out of Selecting a Mouse Package
With reviews like this how can you go wrong.

Popular Computing Weekly, 9-11 June '87
"What you actually get for your money is a well built, three button mouse (far superior to the AMX mouse)."
"Overall the combination of a quality mouse and decent art package gives Watford Electronics a real chance of supplanting AMX as mouse supremos."

Micro User June '87
"Quest Mouse and Quest Paint can hold their heads high in the market. . ."

A&B Computing June '87
". . . Watford Electronics, a company famed for excellent hardware add ons and versatile software packages. Called Quest mouse, "this is a very special mouse driven drawing package. . ."

". . . you will have one of the most comfortable and professionally built mice I have used in a long time. The buttons are responsive, the mouse movement is smooth and without directional bias - a pleasure to use."

"What we have here is probably the best art package there is for the BBC Micro . . ."
"Quest Paint is a major leap forward in BBC programming. . ."
"Quest Paint is an original piece of programming, it is friendly and well endowed with many useful facilities. I would comfortably say it is easier to draw good pictures with Quest Paint than it is with more expensive 'Professional' art packages for the Atari ST and the Commodore Amiga. A recommended buy if you are looking for the best in BBC micro based art packages".

Acorn User, September '87
"The mouse (Quest) performs well in the face of competition from AMZ, Wigmore and the rest . . ."

". . . this package represents excellent value for money. If you are interested in art then this program is for you to buy".

"Given time, I can see no reason why Quest Paint shouldn't take on the title of the definitive art package available for the BBC Micro to date".

"All in all, Quest Paint is a very professional package. It contains virtually every feature the budding artist could require".

"What makes Quest Paint so versatile is the addition of a sub-menu which allows you extensive control over each function".

"Until recently, Superart from AMS had been judged as the definitive mode 1 graphics package for the BBC micro. But now it has a serious rival in the form of Quest Paint, from Watford".

"As a measure of what is contained within Quest Paint, I would say it had all the features of Superart plus . . ."

"In most art packages, provision is given for drawing triangles and rectangles. Quest Mouse goes 14 better, allowing any regular polygon of upto 16 sides".

"One facility, not found on any other Art package to my knowledge, is the ability to access a digitiser from within the program".

The reviewer concludes by saying, "The result is an extremely comprehensive and professional art package".

| | |
|--|------------|
| QUEST MOUSE & QUEST PAINT | £59 |
| QUEST MOUSE, QUEST PAINT, AMX PAGERMAKER & PAGEFONT | £85 |
| QUEST MOUSE ONLY | £29 |
| QUEST PAINT SOFTWARE | £32 |
| QUEST FONT DISC | £12 |
| QUEST MAT | £3 |
| Part-exchange your old Mouse for a New QUEST MOUSE for only | £23 |

N.B.
1. Quest Paint supplied complete with Software in a 32K ROM, Comprehensive User Guide and a Utility Disc.
2. Quest Font Disc has 24 text FONTS for use within Quest Mouse.
P.S. There is no need to worry about any of your existing AMX mouse software. The Quest Mouse is totally AMX compatible so it will work with any of the AMX range of software.

All prices in this advert are exclusive of VAT.

MARK II LIGHT PEN + PENPAL 2


Our Mark II Light Pen is the very latest in light pen technology. It is totally insensitive to local lighting conditions and works with many different monitors. The pen only responds to the High Frequency light produced by your monitor/TV. An LED indicates when valid video data is being produced. A conveniently located switch is also fitted.
Penpal II, Watford Electronics' sophisticated light pen software is also supplied free on cassette or disc (please specify). This is a highly sophisticated drawing package enabling you to gain the maximum benefit from your Light Pen. The software is used to edit Mode 2 full colour screens using lines, patterns and you own designs. Screens may be saved to cassette or disc.

Price Only £15



CREDIT CARD 24 HOUR
Ansaphone Hot Lines
(0923) 50234 or 33383

THE AMX MOUSE



Now supplied with the NEW SUPERART Software ROM & Disc at no extra cost.

ONLY: £59 (carr £1.50)
(Please specify for BBC or Master Computer)

We are giving away, absolutely FREE, our popular Colour Art software package worth £15 with every AMX Mouse package purchased from us.

| | |
|--|------------------|
| AMX MAT | £3 |
| AMX MOUSE ONLY | £29 |
| AMX DESK Package | £19.00 |
| AMX UTILITY Package | £11.00 |
| AMX SUPERART Package | £39 |
| AMX PAGE-MAKER Pack - A desk-top publishing software. It Works with keyboard, joystick and a mouse | Only: £32 |

We are giving away, absolutely FREE, PAGE-FONTS, a disc containing over 20 fonts, with every purchase of AMX PAGE-MAKER from us.

| | |
|---|--------------|
| PAGE-FONTS - Over 20 Fonts for use with AMX Pagemaker | £9.50 |
| AMX DESIGN (ROM) | £59 |
| AMX 3D ZICON Disc | £19 |
| AMX Database Disc | £19 |
| AMX Stop Press | £39 |
| AMX XAM Educational | £19 |
| AMX MAX A gem of desktop | |


RB2 Marconi Tracker Ball

| | |
|-----------------------------------|-----|
| Complete with Software Disc | £59 |
| RB2 + Software Disc + Quest Paint | £85 |

FLEET STREET EDITOR

| | |
|-------------------------------|-----|
| Software pack for BBC/Master | £36 |
| Software Pack for Compact | £40 |
| Admin Xtra Disc Utility | £13 |
| Walt Disney Disc Utility | £13 |
| Fonts N Graphics Disc Utility | £13 |

DIAGNOSTICS DISC

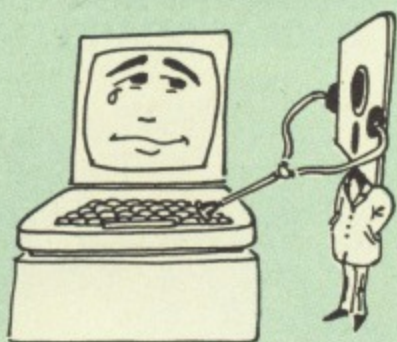

The BBC Micro is a very complex machine and thus diagnosing a fault can be very difficult. At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.

The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb: RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Only £20.00

OFFICE MASTER



CASHBOOK - A complete "Stand Alone" accounting software package for the cash based sole trader/partnership business. It is designed to replace your existing cashbook system and will provide you with a computerised system complete to trail balance.

FINAL ACCOUNTS - Will take data prepared by the Cashbook module and produce a complete set of accounts as following: Trial Balance with inbuilt rounding routine; Notes to the accounts; VAT Summary; Profit & Loss A/C; Balance Sheet.

MAILIST - A very versatile program. Enables you to keep records of names and addresses and then print, examine, sort and find them, all with special selection techniques.

EASILEDGER - A management aid software tool designed to run alongside an existing accounting system. Essentially a Debit/Credit ledger system which can handle sales, purchase and nominal ledger routines to provide instant management information.

INVOICES & STATEMENTS - Greatly reduces the time and cost of preparing Invoices and Statements by storing essential information like customer names, addresses and account numbers. Has VAT routines and footer messages facility.

STOCK CONTROL - Allows you to enter stock received, stock out, summary of stock items and current holdings together with details of total cost, total stock to minimum level, units in stock ordering, quantity and supplier detail.

All this for only £21 (Disc)

OFFICE MATE



- DATABASE
- BEEBCALC SPREADSHEET
- BEEBLOT GRAPHICS

DATABASE - Set up a computerised card index system with powerful search facilities.

SPREADSHEET - Offers many calculation and editing features.

BEEBLOT - Provides visual representation from Spreadsheet data.

OFFICE MATE Only £10 (Disc)

TED

THE ULTIMATE TELETXT SYSTEM

TED is one of a new generation of powerful 32K ROMs for the BBC B, B+ and Master computers and is compatible with disc, tape and network systems. It is in everyday use in schools, colleges and universities, Programmers, Prestel I.P.'s, Micronetters and exhibitors have also found it indispensable.

TED includes the most comprehensive teletext (Mode 7) screen editor ever written for the BBC micro, combining flexibility with ease of use. Its sophisticated facilities include line, column and block copying within AND between frames; text, in a variety of styles and sizes, entered directly from the keyboard; graphics and line drawing modes; search and replace; margins; printer dump routines and a library of in-built icons and typefaces. TED will edit ANY mode 7 screen and can even convert high-res graphics screens to mode 7! Included within the ROM is a fully Epson compatible MODE 7 graphics dump routine giving a grey scale printout of exactly what appears on the screen.

Using "SHOW" (a versatile carousel), collections of mode 7 screens may be 'routed' or displayed sequentially, making it ideal for creating and running 'Viewdata' information systems. Over 1200 frames may be stored on a twin 80 track drive. A unique feature of TED is "SCROLL", which lets you create pages of up to 600 lines which may be viewed 'Wordwise style', automatically or manually. SHOWs and SCROLLs may be freely mixed and even used from within a BASIC program.

The package comprises a 32K ROM, a 117 page manual, a function-key strip and a demonstration disc containing examples of real-time animation and a sample 55-frame database. A stand-alone machine code routine is provided allowing SHOWs and SCROLLs to be displayed on machines not fitted with TED.

Price: £35

ROM-SPELL




Probably the most advanced and fastest spelling checker available for the BBC Micro. Compatible with View, Wordwise and Wordwise Plus ROMSPELL is simple to use with easy editing of incorrect words. Full facilities for editing the user dictionary to allow customisation to your personal needs. Dictionary includes over 30,000 words and is supplied with a Comprehensive manual.

NOT compatible with 1770 DFS.
(Please state 40 or 80 track disc)

Price still only: £25

ROM MANAGER

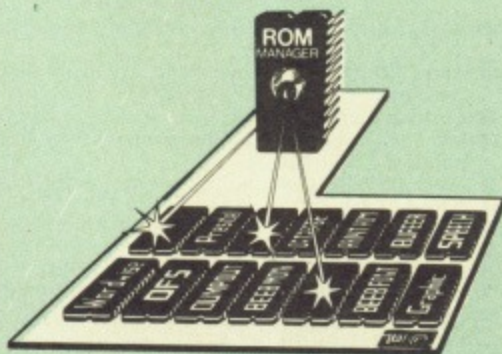


Take control of your Sideways ROMs with ROM Manager. This powerful utility ROM gives you power over your sideways ROMs. Disable whole ROMs, send commands directly to named ROMs and many other powerful facilities.

"Provides comprehensive management of all your installed ROMs". (BEEBUG November '84.)

ONLY £20


PLINTHS FOR BBC MICRO, MASTER & PRINTERS

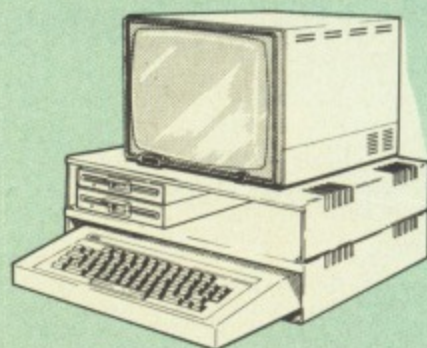

Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

| | |
|----------------------|-------------------|
| SINGLE BBC PLINTH | £11 (carr. £1.50) |
| DOUBLE BBC PLINTH | £19 (carr. £3.00) |
| PRINTER PLINTH | £10 (carr. £1.50) |
| SINGLE MASTER PLINTH | £14 (carr. £1.50) |
| DOUBLE MASTER PLINTH | £24 (carr. £3.00) |

COPY HOLDERS

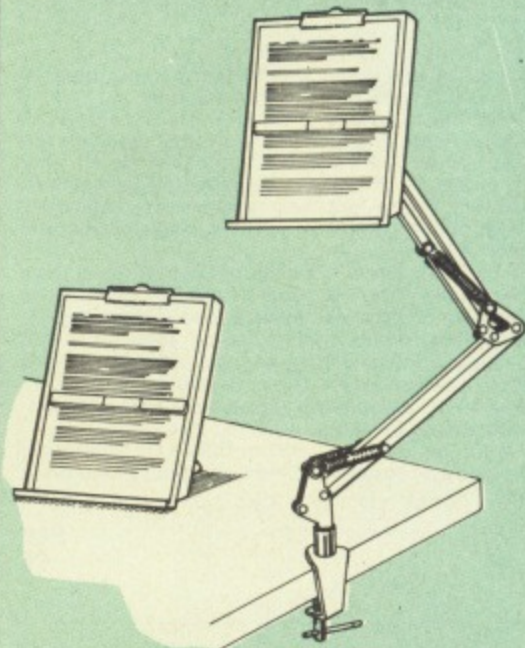

How often have you been about to type hand written notes into your computer when you find that there's nowhere to rest the paper or that your notes are resting at the wrong angle to read the type? Whether the notes be your latest program or the draft of a new trilogy, the new Manuscript Holders from Watford are superb for holding your paper at the ideal height and angle to allow you read and type in ease and comfort.

Available in 2 versions, desk resting and shelf clamping versions, these two units hold your paper firmly by means of a plastic retaining ruler and a clip grip. Both units are full A4 size.

Amazing value at only
Desk Top £10 (carr. £2)

Angle poise £14 (carr. £3)

Continued





ARIES CORNER

The Aries B-32 Shadow RAM Card

Like the BBC B+, the B32 provides 20k of shadow screen RAM and 12k of sideways RAM. Unlike the B+, the B32 has simple software commands which allow the user to reconfigure the RAM as 16k of shadow RAM and 16k of sideways RAM, or all 32k as sideways RAM.

With the B32, the programmer gets up to 28k of RAM available for Basic, Logo, Comal, Forth, Lisp and BCPL programs in any screen mode. The business user gets extra memory for View, ViewSheet, Wordwise Plus, Interword and many other applications. For advanced applications, the scientific user gets access to a massive 47k of data storage using the Acorn approved *FX call.

Sideways RAM enables you to load sideways ROM images from disc, allowing you to have a large library of sideways ROMs (subject to the copyright holder's permission) stored on disc. The B32's sideways RAM can also be used to extend any operating system buffer (such as the printer buffer) or to load tape programs into a disc system.

The B32 simply plugs into the 6502 processor socket on your BBC micro - no flying leads to connect and no soldering. Provision of the on-board ROM socket means that the Aries-B32 control ROM does not use up one of your existing ROM sockets.

Price: **£80** (carr. £2)

Aries B-12 Sideways ROM Board

This board is extremely well made, simple to install, reliable when fully loaded and compatible with the Aries-B20 and the Aries-B32

The B12 provides a total of twelve sideways ROM sockets (the four in the original machine are replaced by the twelve on the board), all fully accessible by the MOS sideways ROM system. In addition, there are two sockets for sideways RAM, giving up to 16k of RAM using 6264 static RAM chips.

The B12 system consists of two parts: a large detachable "mother board" which carries the extension ROM sockets and a small "base board" on a short ribbon cable, which plugs into the existing sideways ROM sockets. This two-board design eliminates the reliability problems previously associated with some other ribbon-cable based systems.

If you do not have a B32 or B20, a small adaptor module (the Aries-B12C) is available at a nominal cost.

Price: Aries B-12 **£40**
Aries B-12C **£5**

ARIES B-488 IEEE-488 INTERFACE UNIT


The Aries-B488 is an interface unit to enable the BBC micro to control and monitor IEEE-488 bus systems. The IEEE-488 bus (also known as the 'GPIB' or 'HP-IB') is the standard method of interconnecting programmable laboratory instruments and control equipment. Using the B488, up to 15 devices may be connected in a single high-speed data network.

£238 (Carr £3)

GRAPH PAD 2

Supplied complete with Software **£60** (Carr. £3)

SIDWAYS ZIF SOCKET

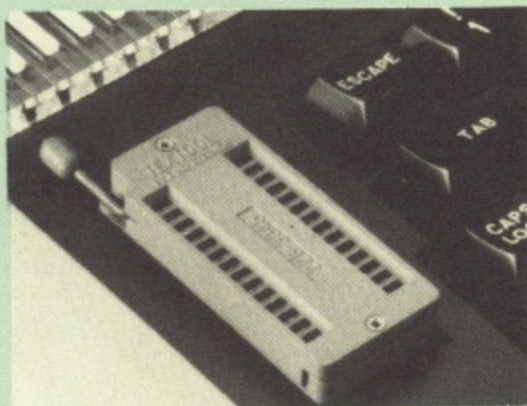

Allows you to change your ROMs quickly and efficiently, without opening the lid. The ZERO INSERTION FORCE (ZIF) socket is located into the ROM Cartridge's position.

● Very simple to install. **NO SOLDERING** required. The ZIF (Zero Insertion Force) eliminates the possibility of damage to your ROM pins when inserting & extracting.

● The low profile of the socket allows unrestricted access to the Keyboard.

● All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.

● This versatile hardware solves the problem of running out of socket space. Simply lift the ROM from the ZIF & insert a different one (No pulling or pushing of Cartridges. It is a must for all professionals and Hobbyists alike.)

● BBC, B+ and Master compatible.

ONLY £15 (carr £2)

Low Profile CARTRIDGE SYSTEM

Complete System consists of: Low profile ROM Cartridge, Socket housing, Cable assembly, 5 labels and a library storage rack.

● Complete System **£11**
● Spare Cartridges **£2.50**
● Spare Rack **£1.50**

16K Sideways RAM Modules

Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector.

Key points to note about this new addition to the Watford range of products are:

- Write protection (useful in a variety of circumstances).
- Read protection (allows recovery from ROM crashes).
- Compact construction.
- May be fitted in systems even with a ROM board.
- Multiple units may be fitted, even with a ROM board.
- No overheating or overloading problems.
- Free utilities disc supplied.
- Can be used as a 16K PRINTER BUFFER.
- Ideal for professional software development.
- Supplied with utilities software disc.


Only: **£24** (carr £2)

Optional extras

READ and WRITE protect Switches **£2** each
Battery for Battery Backup **£3**

All prices in this advert are exclusive of VAT.

SOLDERLESS SIDWAYS ROM SOCKET BOARD

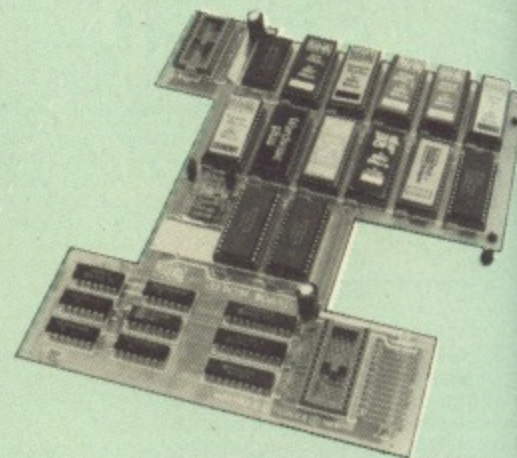

In the May 1986 Micro User's independent review, the writer concludes, "The board has been well laid out. Its position is much better than others - not over the HOT RAM chips and further away from the disc controller area". "I give the solderless ROM board the thumbs up and wish it success".

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16.

Unlike our competitors inferior boards, the ONLY upgrade required for fitting battery backup to the Watford Solderless ROM board (all Watford ROM boards, actually) is the fitting of the battery itself. (No other expensive components are required.)

● The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows:


- Increase your BBCs capacity for ROMs from 4 to 16.
- **No soldering required.**
- Very low power consumption.
- Minimal space required.
- Compatible with Torch, DDFS, RAM Card, 2nd Processor, etc.
- Socket 14 takes two 6264 RAM chips.
- Read protect to make RAM "Vanish" allows recovery from ROM crashes.
- Battery backup option for RAM chips.
- Supplied ready to fit with comprehensive instructions.

Price: **Only £32**
Battery backup fitted **£36**
(carriage £2)

● Sideways RAM Utilities Disc for Solderless ROM Board. Includes the options to load and save ROM Images and the facility to use Sideways RAM as Printer Buffer.

Only: £8


USER PORT SPLITTER UNIT

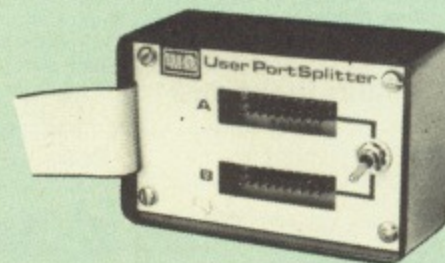

Gone are the days when you had to plug and unplug devices from the User Port. This extremely useful little device allows two units to be connected to the User Port simultaneously, and select between them simply by toggling a switch. This device is particularly useful for those people using Quest Mouse and the Watford Video Digitiser or any similar combination.

Excellent Value at £19

ROM/RAM CARD

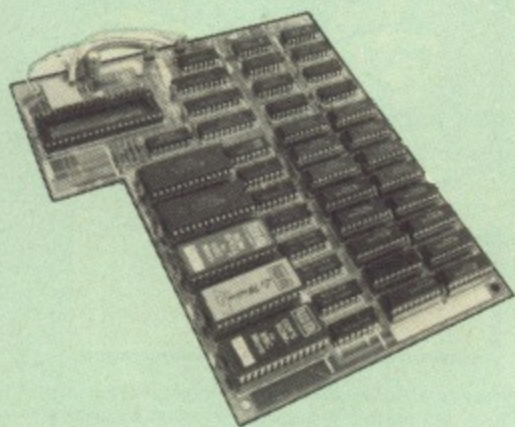

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems.
- No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers, etc.)
- Fully buffered for peace of mind.
- Firm mounting in BBC micro.
- Compatible with all BBC micros (not BBC+ or Master).
- Total number of ROMs increased from 4 to 8.
- Up to 8 banks of sideways RAM (dynamic).
- Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
- Software Write protect for ALL RAM.
- Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
- Separate RAM write register (&FF30 to &FF3F).
- Automatic write to currently selected RAM socket for convenience.
- Accepts any ROM.
- FREE utilities disc packed with software.
- Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.
- Large printer buffer.
- UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).
- ROM to RAM load and save facilities.

The SFS (Silicon Filing System) can utilise up to the full 128k of RAM (with the SFS in any paged RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD &7F for ROM-SPELL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM-RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM-RAM Board.

The ROM-RAM Board is supplied with all ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the options, for later.

Please write in for further details.

INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM£39
- ROM/RAM card with 64k dynamic RAM£52
- ROM/RAM card with a massive 128k dynamic RAM£80
(carriage on ROM-RAM Card £3)

OPTIONAL EXTRAS:

- 16k plug-in Static RAM kit.....£6
 - 16k Dynamic RAM for Upgrade.....£7.50
 - Battery backup.....£3
 - Read and Write protect switches.....£2 each
- Complete ROM-RAM board
All options installed£89

P.S.

Is your existing ROM Board overflowing with ROMs? Do you need more Sideways RAM? Is your Board unreliable? Then upgrade to Watford ROM/RAM Board and pay £10 less

Le Modem



The MODEM from Watford

At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multi-standard, i.e. 300/300, 1200/75 & 75/1200 UK and BELL (USA) are all supported.

The features that make Le MODEM such good value are:

- A complete communications terminal that transforms your BBC Micro into a very powerful World-wide data transfer system.
- Auto Dials, Auto answers, and is completely controlled by your micro. There are no external controls!
- Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.
- Designed to be SIMPLE but SOPHISTICATED. To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the rest.
- Supplied with a comprehensive telecomms package in a 16K sideways ROM which includes a FULL PRESTEL terminal allowing TELESOFTWARE to be downloaded.
- A comprehensive 80 column terminal. This includes XMODEM error checked transfer protocol, to allow error free data transfer anywhere in the world!
- FULLY controlled by simple **COMMANDS allowing you to control it from your own BASIC programs. To get you started we supply a FREE disc of bundled software!
- Connects to the 1MHz bus. A *AUDIO ON-OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
- Completely self contained with internal mains power supply. (Even a free mains plug is fitted!) A *TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
- Packaged in such a way that you need nothing else except a BBC Micro to communicate with computers all over the world.
- FREE Registration to MicroLink.

SPECIAL OFFER

Price: **£84**
(carr £3)

(Price includes, Le Modem, Software ROM, Cables & Comprehensive Manual)
(Write in for further details)

Nightingale Modem


SPECIAL PRICE to our Customers

£82

(Price includes: Nightingale Modem, Commstar ROM pack & Comprehensive manual)

Nightingale Modem without software Only £75
COMMSTAR ROM package only £29
(P&P on modem £3.00)

APOLLO



The NEW Modem from Watford

Following numerous requests from you, our discerning customers for an APPROVED, Low Cost & High Performance modem with Auto Dial & Auto Answer facilities as standard) we bring you the versatile APOLLO Modem. Just compare the features and look at the price (which incidentally includes the cost of the Software, manual and BBC connecting cable). We are sure you will agree that Watford Electronics in their traditional way are giving you a super 'value for money' deal.

Just look at these features:

- V21 for Bulletin boards, Microlink, Telecom Gold, etc.
- V23 for Prestel, Home Banking, and other Viewdata services.
- Reverse V23 allows User run Viewdata service.
- 1200-1200 half duplex for communications.
- XMODEM, HEX and ASCII file transmission.
- Auto Dial of given 'phone number.
- Auto Answer for User's Bulletin Board.
- 80 column terminal with split screen facility.
- Prestel text screen dump.
- Fully BABT approved.
- FREE Registration to MicroLink.

The Apollo is attractively finished in matt black. It opens the doors to world communication to both, the Hobbyist and the Professionals alike. With baud rates varying from 300/300 Originate and Answer, 1200/75 and 75/1200 full duplex and 1200/1200 half duplex, virtually all the popular tele-services can be accessed. A comprehensive Comms ROM oversees the use of the APOLLO, providing simple commands for all the software controlled facilities. APOLLO is an ideal modem for both the first time buyer and the seasoned user. Join the Telecommunications Revolution - Buy a Watford APOLLO!

Only: **£84** (Carr £3)
(Write in for full specification)

Minerva Systems Software

| | |
|-------------------------------|-----|
| System Delta with Card Index | £55 |
| System Programmers Ref. Guide | £19 |
| System Gamma | £43 |
| System Gamma Prog, Ref, Guide | £19 |
| System Mailshot | £17 |
| System Reporter | £17 |
| System Intrer/View Link | £17 |
| System Sales Ledger | £39 |
| System Purchase Ledger | £39 |
| System Nominal Ledger | £48 |
| System Stock Management | £39 |
| Order Processing/Invoicing | £39 |

Versatile BEEB SPEECH SYNTHESISER Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form virtually any word imaginable.

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive manual.

SPECIAL PRICE £32 (carr £2)

Continued

COMPUTER CONCEPT'S ROMS

| | |
|-------------------------|-----|
| ACCELERATOR | £48 |
| CARETAKER Basic Utility | £25 |
| DISC DOCTOR | £28 |
| Graphics ROM | £23 |
| TERMI | £25 |
| COMMUNICATOR | £49 |
| SPEECH ROM | £24 |
| Printmaster | £24 |

Wordwise

£24

Wordwise plus

WORDWISE PLUS £40

We are giving away absolutely **FREE**, the superb Word-Aid ROM worth £24, with every WORDWISE PLUS package bought from us.

Word-Aid

The most comprehensive utilities ROM for Wordwise-Plus

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option. This ROM has been personally approved by Mr Charles Moir, the author of WORDWISE PLUS.

- Alphabetical sorting of names and addresses.
- Text transfer options.
- Chapter marker.
- Epson printer codes function key option.
- Search and display in preview mode.
- Embedded command removal.
- Print Multiple copies of a document.
- Multiple file options for print and preview.
- Address finder.
- Label printer.
- Mail-merger.
- Number/delete/renumber.
- Clear text-segment area.
- BBC B, B+ and Master compatible.

Only £24

(N.B. Word Aid requires a Disc Interface in your Micro)

HI-WORDWISE-PLUS DISC: £5

SPELL MASTER £47

Inter SHEET ONLY £37

INTER-CHART

ONLY: £26

Inter-WORD

Only: £39

INTERBASE £55

All Prices Exclusive of VAT

VIEW

VIEW WORDPROCESSOR 2.1 £37

VIEW 3.0 ROM £54

VIEW PROFESSIONAL £79

HI-VIEW £36
(for use with 6502 2nd Processor)

VIEW Printer Driver Generator £9
Please specify Disc or Cassette)

VIEWSHEET (Acornsoft) £37

VIEWSTORE £37

VIEWSPELL with 80 track disc £29

VIEWPLOT Disc £22
(Please specify for Master 128 or Compact)

VIEW-INDEX £12

OVERVIEW Packs 1 & 2 for the Master £75

Watford's own Sophisticated VIEW PRINTER DRIVERS

Epson FX80 & Kaga KP (Disc) £8
Juki & Brother HR15 (Disc) £8
Silver Reed Printers (Disc) £8

Micros in Business (Disc)

An introduction to Business software for the BBC Micro from Acorn £43

ADVANCE COMPUTER PRODUCTS' ROMS

Adv. Disc Toolkit £29
Adv 1770 DFS for Mast/Compact £29
Adv 1770 DFS for BBC/BBC+ £29
Adv Disc Investigator £24
Adv. Control Panel £29
Adv. Rom Manager £13

MINI OFFICE II

Disc Version £14.50
ROM Version £48.00


REPLICA 3

This new improved REPLICA 3 from Clares is a very powerful disc based TAPE to DISC Utility. It now transfers even more programs than ever before. Replica 3 will not work with all programs but then neither will anything else. 30,000 Replicas have been sold to date. It has to be good.

£13 (40 or 80 track)

Acorn's Speech Synthesiser package, complete
Special Offer £18

VIEW PRINTER DRIVER ROM

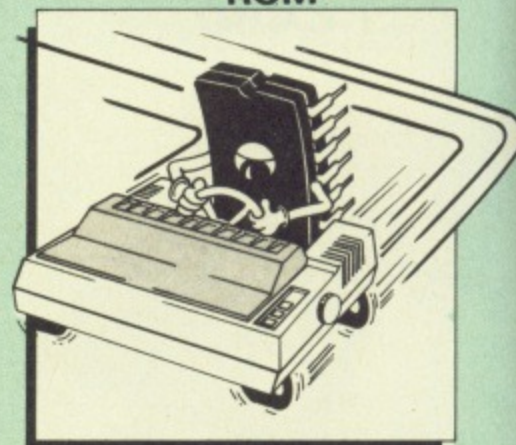

View is a powerful word processor, but until now has seriously lacked in terms of printer support. With the launch of our Printer Driver ROM, which includes an extremely powerful and easy to use Printer Driver Generator, View users can find themselves in the realms of advanced word processing only at a small outlay.

The VPD extends View's printer command with a series of mnemonic commands. All standard highlight sequences are also supported. A large range of printers are supported by drivers contained within the ROM (the drivers can be downloaded and customised). Printers supported include: Epson's MX, RX, FX, LX, JX80 range, HI80, KP810/910, PW1080, JP101, HR15, M1009, GLP, JUKI 6100, etc.

Other printers are readily supported by defining a Printer Driver using the built in Printer Driver Generator. The features mentioned below are available to both the built in Printer Drivers and user defined drivers (assuming the printer supports the features).

NLQ control, Underline, Bold, Proportional Spacing, Microspacing, Italic, Superscript, Subscript, Condensed, Enlarged, Double Strike, Set lines per inch numerically (e.g. LPI 6), Set characters per inch numerically (e.g. CPI 5), Select printer font, Select printer ribbon colour, Translation sequences, Emulation of BBC Character Set, Simple numeric expressions for certain operations, Full printer setup, Send control codes, Print prompt on screen, Redefinable Pad character, Pause for key press, Prompt to change daisywheel, and Execute * command when printing.

Other features include a very powerful on screen preview, with bold, italic, underline, super/subscript, enlarged highlights, and a special printer driver to allow memory based text to be previewed by View 1.4. Of course, View 1.4, 2.1 and 3.0 are all supported, as is Shadow RAM and 6502 Second Processors. The BBC B series and Master series of micros are supported. A comprehensive manual is supplied. All in all, a very professional product for the discerning user who wants power at their finger tips. (Write in for a detailed leaflet).

Price: Only £33

EPSON NLQ ROM for the BBC Micro



Harness the full potential of your Epson RX or FX printer. The NLQ ROM makes Epson printers produce Near Letter Quality output with optional proportional spacing, enlarged and underlined. Accessed by simple * commands from Basic, Wordwise and View (with driver) or almost any other language.

(Send an SAE for sample printout)

Only: £25

VIEW PRINTER DRIVER for NLQ ROM £7

DUMPOUT 3



A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including full Mode 7 graphics. Also provided are window setting utilities and OSWORD calls to plot and read Mode 7 graphics pixels.

Facilities:

- Vertical and horizontal scaling in all graphics modes and mode 7
- Rotation of image by 90, 180 or 270 degrees
- Left hand margin setting
- Screen dump window setting
- Colours appear as grey scale
- Two tone fast dump
- Colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered and User Port triggered dumps

The Micro User Feb. 1985.

'Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC Micro ... it must represent excellent value for money and surely cannot be beaten'.

For use with the following printers:

GLP, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, M1009, NEC PC8023, DMP100/200/400, Panasonic KX1080, Mannesman Tally and compatibles.

Only: £25

(Write in for further details on all above ROMS)

THE EUREKA CARD

(The Unique RAM Expansion System)

The Eureka Card is Watford's latest and most sophisticated RAM expansion system. Using advanced PAL based technology this card is a breakthrough in RAM systems for the BBC micro. The Eureka Card provides the user with around 58K of free memory in Basic, VIEW and WORDWISE PLUS. You also get Shadow RAM from within the active language. No other RAM expansion system can match that!

Load up to 58K long Basic programs. Texts in VIEW and WORDWISE PLUS up to 58K as well. This with absolutely NO loss of speed in accessing your text or program. Eureka consists of a card containing 64K of program memory, two parallel banks of sideways RAM and some extremely complex switching circuitry. This is all controlled by Eureka's highly sophisticated software supplied in ROM. Designed to a very high specification, this board is fully buffered to give reliable operation under virtually any circumstances.

The Eureka board plugs into the 6502 socket and has NO messy flying leads. It is compatible with many other products from Watford, such as our Solderless ROM Board and our ROM/RAM Board. All in all, the Eureka Card is an amazing board. Jump into the age of serious data processing with a Eureka Card! Please write in for further details 'on advantages the Eureka can offer you'.

Introductory price: Only **£89** (carr £3)

(P.S. Eureka is only suitable for a standard model B; it normally replaces any Shadow RAM cards present. Some speed degradation does occur with filing system access. Eureka cannot be used at the same time as a second processor).

BEEBMON

The most powerful machine code monitor for the BBC Micro **£24**.

THE NLQ DESIGNER

(The First & still the Best)


Supplied with over 25 Different fonts

A massively useful utility for users of the Taxan/Kaga KP810/910 or the Canon PW1080. This program allows you to define NLQ character sets to download into the printer's memory. Full on screen editing of the font. Requires 6264 RAM chip to be fitted in the printer.

Supplied with disc containing over 25 example fonts. Please specify 40 or 80 track. Fonts are: Italic, Courier, Courier Italic, Script, Copper Plate, Shadow, Bold, Double Print and Gothic etc. (P.S. This ROM is not suitable for Epson printers.)

● NLQ Designer ROM & FONT Disc **£25**

ADDER

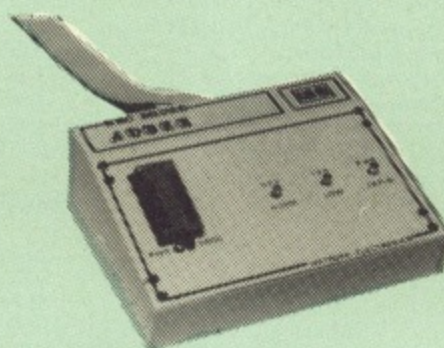

Adder is the ultimate EPROM programmer for the BBC Micro. It will program many different EPROMs up to the very latest 27256 32K devices.

The Adder unit connects to the User Port and draws its power from there too. The EPROM is mounted in a top quality ZIF socket. There are no switches or controls as Adder is entirely software controlled.

The Adder software provides sophisticated facilities for programming EPROMs from a RAM image produced by loading disc files. The software is menu driven and designed for ease of use.

Features:

- Two ultra fast programming algorithms or standard slow algorithm.
- Supports standard 21V programming and newer 12.5 volt EPROMs. (Software switched).
- The RAM image to be programmed can be built up in many ways. Sections of image can be loaded separately. Part programming. Read EPROM. Edit data in memory.
- Automatic processing to handle a list of files to program into the EPROM.
- Automatic disc buffering to allow programming of 32K 27256 devices from a 32K file without extra effort.
- Verification gives detailed error list and checksums are maintained. There is also a blank check facility.
- Works with all standard filing systems. Generates header code for RFS ROMs to allow Basic programs etc. to be stored in EPROM. More than one file per ROM permitted.
- Programs the following EPROMs: From 2K to 32K: 2516, 2716, 2532, 2732, 2764, 2764A, 27128, 27128A, 27256 (Both 12.5V and 21V).

£65 (£3 Carr)


TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- ERASER EB - Standard version erases up to 16 chips. **£28** (carr £2)
- ERASER GT - Deluxe version erases up to 18 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30** (carr £2)
- Spare UV tubes. **£9**

32K

SHADOW RAM-Printer Buffer Expansion Board

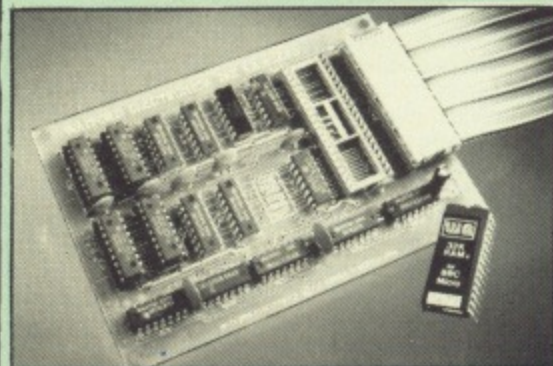

A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Don't throw away your BBC B for a BBC B Plus or BBC Master. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra RAM!!!

● IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer - type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.

● "VIEW" Wordprocessor users can now type in letters in 80 columns and have up to 28,000 bytes free - 5 times as much as normal.

● In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This product is recommended as an ideal complement by Computer Concepts.

● Combine GOOD, GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of program space.

● Use the FULL 32K or the bottom 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Print large text files while running long graphics programs, and have all your buffer options available as well (*FX15,21,138,145,ADVAL etc). Please note only a 12K printer buffer can be used with Wordwise or Wordwise-Plus, due to the way they are written.

● Unique facility to turn ROMs off and on again. Unlike all other ROM managers, this feature does not use 'unofficial' memory. Two bytes of normally user-inaccessible memory on the RAM card are used to ensure ROMs are disabled WHERE OTHER ROMS FAIL.

See next page for SPECIAL OFFER

Only £59 (carr £2)

(Price includes a comprehensive manual and the ROM)

INCREDIBLE WORDPROCESSING DEAL

Watford's 32K SHADOW RAM CARD and Computer Concept's INTERWORD Wordprocessor package.

at Only **£89** (carr £2)

Continued

BOOKS (No VAT on Books)


| | |
|--|---------------|
| 15 Hr Wordprocessing BBC/View | £3.95 |
| 15 Hr Wordprocessing BBC/WW & WW+ | £3.95 |
| 30 Hour BASIC (BBC Micro) | £7.95 |
| 40 Best machine Code Routines | £7.95 |
| 50 Programs in BBC BASIC | £6.95 |
| 6502 Assembly Language Program | £19.95 |
| 6502 Application | £11.95 |
| 6502 Assembly Lang. Subroutines | £19.95 |
| 6502 Development Package | £7.50 |
| 6502 Reference Guide | £9.95 |
| 68000 Assembly Lang. Programming | £19.95 |
| 68000 Machine Code Programming | £13.00 |
| 68000 Microprocessor Handbook | £14.95 |
| 68000 Programming the | £22.95 |
| 68000 User Guide | £8.95 |
| 6809, Programming the | £16.95 |
| 6809 Machine Code Programming | £7.95 |
| 8086/8088 Assembly Language Prog. | £11.95 |
| 8086/8088 Programming the | £16.95 |
| Advanced Disc User Guide | £16.95 |
| Advanced BASIC ROM User Guide | £9.95 |
| Advanced Programming Guide to BBC | £9.95 |
| Advanced Sideways RAM User Guide | £10 |
| Advanced User Guide for BBC | £10.95 |
| Advanced FORTH | £9.95 |
| Advanced Graphics with BBC | £9.95 |
| Assembly Language Programming on BBC Micro | £11.50 |
| Adventure into BBC BASIC | £6.95 |
| Applied Assembly Lang. for BBC | £9.95 |
| ARM Assem, Lang, Programming | £12.95 |
| Art of Microcomputer Graphics | £14.95 |
| Assembly Language Programming FOR the BBC Micro | £8.95 |
| Assembly Language Programming on the BBC & Electron | £8.95 |
| Basic ROM User Guide | £11.95 |
| BBC B Compendium | £5.95 |
| BBC BASIC for Beginners | £7.95 |
| BBC Forth | £7.50 |
| BBC Hardware Projects | £8.95 |
| BBC Micro Programming Tips | £8.95 |
| BBC Micro & the small Business | £5.75 |
| BBC Micro Programming Tips | £8.95 |
| BBC Micro ROM Book | £10.95 |
| BBC Master 128 for High Flyer | £10.95 |
| BBC Micro Disc Companion | £8.95 |
| BBC Software Projects | £6.95 |
| BCPL User Guide | £14 |
| BCPL The Language & its Compiler | £7.95 |
| C for Beginners | £10.95 |
| C for Programmers | £9.95 |
| Complete FORTH | £6.95 |
| Computer Graphics & CAD fundamentals | £9.95 |
| CP-M-86 User's Guide | £19.95 |
| CP-M Bible | £16.50 |
| CP-M Handbook with MPM | £9.95 |
| CP-M Plus Handbook | £13.95 |
| CP-M Soul of | £16.50 |
| CP-M The software BUS | £8.95 |
| Creative graphics on BBC Micro | £7.50 |
| Disc Drive Projects for Micros | £5.45 |
| DISC FILING SYSTEM (DFS) | |
| Operating Manual for BBC | £6.95 |
| DBASE Programming Language | £14.95 |
| Disc Programming Techniques | £9.95 |
| Exploring FORTH | £6.95 |
| File Handling on BBC Micro | £7.50 |
| FORTH on the BBC Micro | £7.50 |
| Functional Forth for the BBC Micro | £5.95 |
| Guideto BBCROMs | £9.95 |
| Graphics for Children | £6.95 |
| Graphs & Charts on BBC Micro | £7.50 |
| Hackers Handbook - New | £6.95 |
| Inside Information (Computers, Interfacing & Control of BBC Micro Communications & People) | £9.95 |
| Interfacing & Robotics on BBC | £8.95 |
| Introduction to COMAL | £15.95 |
| Introduction to LOGO | £9.50 |
| Introducing 'C' | £6.95 |
| Introducing LOGO | £9.95 |
| Introducing FORTH | £5.95 |
| Introduction to FORTH | £8.95 |
| Introduction to PASCAL | £17.95 |
| ISO-PASCAL Reference Manual | £9.95 |
| LISP 2nd Edition | £14.95 |
| LISP, A Beginners Guide to | £10.95 |
| LISP on the BBC Micro | £7.95 |
| LISP the Language of Artificial Intelligence | £9.95 |
| Logo on the BBC Micro | £7.50 |

| | |
|---|--------------|
| Logo Programming | £10.95 |
| Mysteries of DISC DRIVES and DFS REVEALED | £5.95 |
| Mastering Assembly Code | £8.95 |
| Mastering CP-M | £17.95 |
| Mastering Interpreters & Compilers | £14.95 |
| Mastering Music | £6.95 |
| Mastering View, Viewsheets & Viewstore | £12.95 |
| Master Operating System | £12.95 |
| Mastering the Disc Drive | £7.95 |
| Master Operating System | £12.95 |
| Master Reference Manual Part 1 | £14.00 |
| Master Reference Manual Part 2 | £14.00 |
| Mastering View, Viewsheets & Mathematical Progress in BBC Basic | £7.95 |
| Micro Prolog | £10.00 |
| Microtext for the BBC | £10.00 |
| MSDOS Quick Reference Guide | £9.95 |
| Viewstore | £12.95 |
| Points of View | £6.95 |
| Practical Disc File Techniques | £5.95 |
| Programming the 6502 | £16.95 |
| Programming the Z80 | £19.95 |
| Structured Basic | £7.95 |
| The Epson FX-KAGA PRINTER Commands REVEALED | £5.95 |
| The Software Business | £5.50 |
| Toolbox 2 | £10.95 |
| Towers Int. Transistors Selectors | £12.95 |
| Turtle Graphics on BBC Micro | £7.50 |
| Understanding FORTH - A Beginner's Guide | £6.50 |
| Understanding Interword - A Beginners Guide | £6.50 |
| View 3.0 User Guide | £10 |
| View Guide | £4.50 |
| VIEW Incl. ViewSpell & ViewIndex | £12.95 |
| Viewsheets User Guide | £10 |
| Viewstore User Guide | £10 |
| Within the BBC Micro | £13.95 |
| Writing Interactive Interpreters & Compilers | £8.45 |
| Wordprocessing BBC Beginners Guide | £7.95 |
| Wordstar & CP/M made easy | £7.45 |
| Wordwise + A User Guide | £9.95 |
| Z80 Applications | £15.95 |
| Z80 Assembly Language Programming | £19.95 |
| Z80 Reference Guide | £9.95 |

BBC SOFTWARE'S Popular Educational Software

- Maths with a Story 1 (Cassette). 4 primary level maths programs **£9.95**
 - Maths with a Story 2 (Cassette) 4 further maths programs **£9.95**
 - Picture Craft (Disc) 6 - 14 age group. Pack consists of flexible geometrical design & colouring programs **£19.95**
 - WAVES: Science Topics (Disc) CSC O Level Physics program. **£14.95**
 - RELATIONSHIP: Science (Disc) O Level Biology program. **£14.95**
 - BONDING: Science (Disc) O Level Chemistry program. **£14.95**
 - ELECTROMAGNETIC SPECTRUM (8 Discs) O Level program. **£14.95**
 - ELECTRONICS IN ACTION (Disc) O Level program **£14.95**
 - NEWTON & THE SPACE SHUTTLE (Disc) O Level program. **£20**
 - ECOLOGY (Disc) O Level program. **£20**
 - POLYMERS (Disc) O Level program. **£20**
 - Classification & Periodic Table O Level. The suite is supplied with its own database of chemical elements which can be classified according to your own rule. **£20**
 - FOOD & POPULATION (Disc) O Level program. **£20**
 - MICROTECHNOLOGY (Cassette) O Level program. **£6.95**
 - A VOUS LA FRANCE (2 Cassettes) A French language home study aid. **£17**
 - DEUTSCH DIREKT! (Disc & Audio Cassette) **£20**
 - Modem Master (Disc) **£11.25**
-
- ADVANCED TELETXT SYSTEM **£8.55**
 - PERIOD TABLE SOFTWARE **£20**
 - USING YOUR COMPUTER (Cassette) 8-12 age **£24**

BEEB VIDEO DIGITISER

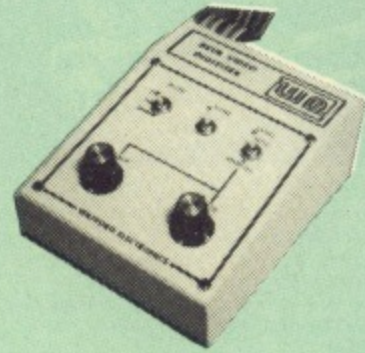

Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC Micro.

This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Full controlling software is supplied on a normal sideways ROM and this is easily accessed via additional * commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROM's to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

£109 (Carr. £3)

(Price includes) Digitiser Unit, Software in ROM & a Comprehensive Manual (BBC B+ and Master compatible, except Master with Econet)

Magazine Maker

(As seen on TV)

A combination of the AMX Pagemaker and Watford's Beeb Video Digitiser.

Using any video that provides a composite signal and the digitiser, images from a camera or TV can be converted into a graphics screen on the BBC Micro.

They can then be used within AMX Pagemaker to illustrate magazines or newsletters - in fact anything that needs to be created on A4 size paper.

With Pagemaker's many features, a variety of pictures can be composed - the only limit being the imagination.

Pictures can be doctored using Pagemaker's graphics option to produce any number of effects.

Text can be formatted around the digitised photo on screen using the facilities available, which include 16 typefaces, character and pattern definer, text formatting and the ability to load in wordwise and viewfiles plus much more.

Once created the picture can be printed out. The Magazine Maker is suitable for any use that requires illustrated documents.


Complete Package £129.00 (carr. £3)

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources which put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. A must for every computer user.

Protection for only **£6.99**

4 WAY MAINS DISTRIBUTION SOCKET

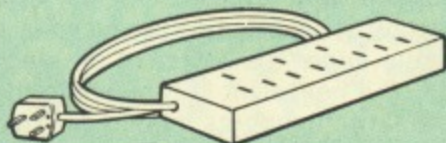

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals.

£7.95 (carr £1.50)

SPIKES CLEANER UNIT

A 4 way mains distribution unit as above with a built-in Surge Arrester, providing protection for your complete computer system

£12.50 (carr. £1.50)

SPARES for BBC Micro

| | | | |
|---------------|------------|-----------|--------------|
| Keyboard | £46 | Keystrip | £2 |
| UHF Modulator | £4 | Case | £20 |
| Speaker Grill | £1 | Speaker | £2 |
| Power Supply | £59 | Keyswitch | £1.50 |

Replacement FLEXIBLE 17 way Keyboard Connector £3

8 WAY DIP SWITCHES

With these DIP switches soldered to their keyboard, any BBC B or B+ owner can take full advantage of the fast disc drives that we supply by configuring his BBC for fast disc drive operation.

Excellent value for money at **£1.00**

CONNECTING LEADS

(All ready made and tested)

| | |
|---|--------------|
| CASSETTE LEADS 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug | £2.00 |
| to 3 pin DIN Plug + 1 Jack Plug | £2.00 |
| to 7 pin DIN Plug | £2.50 |
| to 3 Jack Plugs | £2.00 |
| 6 pin DIN to 6 pin DIN Plug (RGB) | £2.50 |
| VIGLEN DATA DUCK | £14 |

DISC DRIVE POWER LEADS

Supply from BBC power supply to standard Disc Drive connector.

Single **£3.00** Dual **£3.75**

DISC DRIVE INTERFACE LEADS

BBC to Disc Drives Ribbon Cable

Single **£4** Twin **£6**

MISCELLANEOUS CONNECTORS

| | Plugs | Sockets |
|----------------------|-------|---------|
| RGB (6PIN DIN) | 30p | 45p |
| RS423 (5 pin Domino) | 40p | 50p |
| Cassette (7 pin DIN) | 25p | 65p |
| ECONET (5 pin DIN) | 20p | 30p |
| Paddles (15 pin 'D') | 80p | 200p |
| BBC Power Plug 6way | 80p | - |
| Disc Drive Plug 4way | 75p | - |
| 6way Power Connector | - | 95p |

Watford Dealers' List

UNITED KINGDOM

Badger Micros (Devon), Badger's Hill, Southerton, Ottery-St. Mary, Devon EX11 1SE. Tel: 0395 68516.

Beebug Retail, Dolphin Place, Holywell Hill, St. Albans.

Cambridge Computer Store, 4 Emmanuel St., Cambridge CB1 1NE. Tel: 0223 358264.

Cirkit Distribution Ltd, Park Lane, Broxbourne, Herts.

C.J.E. Micros, 78 Brighton Road, Worthing, West Sussex. Tel: 0903 213361.

HCCS, 575-583 Durham Road, Low Fell, Gateshead, Nr. Newcastle Upon Tyne. Tel. 091 4870760.

Mancomp Ltd, Printworks Lane, Levenshulme, Manchester. Tel: 061-224 1888-9888.

Microman Computers, Pasture Lane Farm, Pasture Lane, Rainford, St. Helens, Merseyside WA11 8PU. Tel: 074488 3667.

The Computer Depot, 205 Buchanan Street, Glasgow G1 2JZ. Tel: 041-332 3944.

Verospeed Ltd, Boyatt Wood, Eastleigh, Hants.

OVERSEAS DEALERS

*Absolute Electronics, Rewal House, 208-210 La Trobe Street, Melbourne, 3000, Victoria, Australia. Tel: (03) 663 2411.

Alpha Computer Co, Shop 314 Chi Fu Commercial Centre, Chi Fu Fa Yuen, Hong Kong, Tel: 5-506592.

Computer Distribution Company, Parklaan, 47, 8-9300 Aalst, Belgium.

E.B.N., Elisenstrasse 13, 1000 Berlin 41. Tel: (030) 7952057

Lendac Data Systems, Unit 31, IDA Enterprise Centre, Pearce Street, Dublin 12. Tel: 710796.

Scientex P.V.B.A., Zilvermidstraat 2, B-2000 Antwerpen, Belgium, Tel: 03 233 59 06

Techno-matic Data, Holbergsgade 19, 1057 Kobenhavn K, Denmark

*Velobyte, Scheaedyksadyk 5a-6a, 3011 EB Rotterdam, Holland, Tel: (010) 413 8197/414 5171.

Viking Tecno, Vestergade 12.1, 9620 Aalestrup, Denmark, Tel: 08 642522

*Acorn/Watford Referral Centres.

Viglen Console Unit

Enhance the appearance and convenience of your BBC Micro & Master with the Viglen console unit.

BBC **£42**; Master **£51** (carr. £4)

VOLTMACE JOYSTICKS

| | |
|-------------------------------|------------|
| Delta 3B Single Joystick | £12 |
| Delta 3B Twin Joysticks | £17 |
| Delta 3C Joystick for Compact | £10 |
| Delta 14B Single Joystick | £12 |
| Delta 14B/1 Adaptor Module | £12 |
| Transfer Software Disc-Tape | £7 |

ROM EXTRACTION TOOL

This extremely useful tool allows you trouble free chip removal from your computer by distributing the removal force over the whole body of any 24 or 28 pin chip.

£2

ATTACHE CARRYING CASE for BBC Micro

This attache carrying case is attractively finished in mottled antique brown leatherette. An ideal and safe way of carrying your BBC Micro around. Supplied with two Keys.

Price: **£13** (£2 carr.)

28 pin ZIF SOCKET (Textool) **£6.95**

28pin DIL HEADER PLUG

| | |
|----------------|--------------|
| SOLDER type | £1.50 |
| IDC CRIMP type | £1.95 |

CHIP SHOP

ASSORTED ROMS

| | | | |
|-----------------|---------------|------------------------|-------------|
| 8271 | £36.00 | ACORN ADFS | £25 |
| DS3691 | £3.50 | ACORN BASIC 2 | £19 |
| DS88LS120 | £5.25 | Acorn BCPL | £42 |
| LM324 | £0.45 | Acorn COMAL | £38 |
| SN76489 | £5.50 | ACORN DNFS | £17 |
| SAA5050 | £8.75 | Acorn FORTH | £32 |
| UPD7002 | £4.40 | Acorn Graphics | £25 |
| 2764-250nS | £3.00 | Acornsoft C | £74 |
| 27128-250nS | £3.50 | Acorn LISP | £35 |
| 27256 | £4.20 | Acorn LOGO | £49 |
| 27512 | £9.50 | Acorn OS B+ | £25 |
| 27C101G (1 Meg) | £20.00 | Acorn OS 1.2 | £14 |
| 4013 | 60p | Basic Editor | £24 |
| 4020 | £0.90 | Beebfont | £25 |
| 4464-12 | £4.45 | Beebmon | £22 |
| 4464-15 | £3.75 | BROM Plus | £32 |
| 4816 RAM | £1.75 | Buffer & Backup | £20 |
| 41256 | £2.45 | Communicator | £49 |
| 6264LP-8K RAM | £2.50 | Graphics Extension Rom | £21 |
| 6502A CPU | £4.75 | GXR-B | £22 |
| 65C02 3M | £9.75 | GXR-B+ | £22 |
| 65C12 | £9.00 | Help II | £27 |
| 6512A | £10.00 | ISO Pascal | £54 |
| 6522 | £3.40 | ISO-Pascal Stand | £30 |
| 6522A | £5.00 | Alone Generator | £28 |
| 6845SP | £6.00 | ICON Master | £45 |
| 68B50 | £2.95 | Logotron LOGO | £34 |
| 68B54 | £7.50 | Master Termulator | £62 |
| 7438 | 40p | Micro Prolog | £48 |
| 74LS00 | 25p | Microtext Disc | £199 |
| 74LS04 | 25p | Microtext Rom | £47 |
| 74LS10 | 25p | Mini Office ROM | £21 |
| 74LS123 | 80p | MUROM | £29 |
| 74LS163 | 70p | ROMAS | £29 |
| 74LS244 | 80p | ROMIT | £13 |
| 74LS245 | £1.00 | Serial ULA | £28 |
| 74ALS245 | £2.75 | TERMULATOR | £31 |
| 74LS373 | £1.00 | Toolkit Plus | £15 |
| 74LS393 | £1.00 | Video ULA | £26 |
| 75453 | 70p | ULTRACALC | £74 |
| Acornsoft C | £74 | | |

Prices subject to change without notice and available on request. ALL OFFERS subject to availability.

Mail Order and RETAIL SHOP. Trade and Export inquiries welcome.

Government and Educational Establishments' OFFICIAL ORDERS Accepted.

Shop Hours: 9.00am to 6.00pm. Monday to Saturday. Thursdays 9am to 8pm. (Free Customer's Car Park)

VAT: UK customers please add 15% VAT to cost incl. Carriage.

CARRIAGE: Unless stated otherwise, minimum £1 on all orders. £2 on Larger items.

On bulkier items, £7 Securicor charge applies (UK mainland only). Overseas orders, carriage is charged at cost.

Specifications of all products are given in good faith but is subject to change without notice. Some items vary in their availability. Please ring for latest delivery situation.

Watford Electronics

JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND
Telephone: (0923) 37774; Telex: 8956095; FAX: 01 950 8989

ORDER VIA
MicroLink
72-MAG030

**Mike Cook shows how
to link liquid crystal
displays to a BBC Micro**

CRYSTAL CLEAR

SOME Bodybuild articles present a complete project, others provide a springboard for your own work – but this one might just put you off approaching the springboard altogether. Let me explain.

It all started with a letter from a reader who wanted to know why he had to spend £25 plus for a real time clock when he could buy a digital alarm clock and calendar for much less than half that amount. He asked me how to interface such consumer electronics to the BBC Micro.

Here's how to tackle the problem of getting your computer to read the values on LCDs (liquid crystal displays). It is

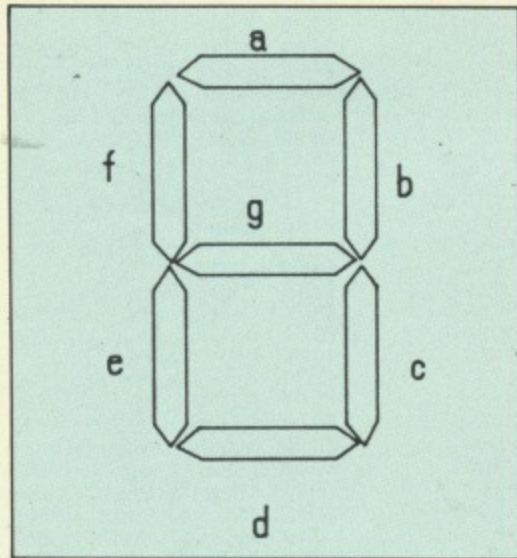


Figure 1: Convention for labelling a seven segment display

quite open ended and could make a very interesting project, especially if you have access to a variety of inexpensive consumer electronic items.

Most displays used in consumer electronics have a liquid crystal system. They have the advantage of being very low cost and take a tiny amount of power to drive.

Their major disadvantage is poor contrast and restricted viewing angle. They work, however, with millivolts so a computer should be able to read them.

Liquid crystal is strange stuff, consisting of long filaments of material rather like very thin needles. At room temperatures there is enough thermal agitation to scramble the crystals, so that they do not interfere with light and appear transparent.

The interesting property of a liquid crystal is that, when an electric field is applied across it, all the crystal filaments line up. These then interfere with the light so that, while it is still transparent, light passing through it becomes polarised. This means that the light that can squeeze through will be aligned in the same direction as the crystals.

Now for a little experiment: Take two lenses from last summer's polarised sunglasses and place them one in front of the other. If you rotate one you should reach a point where you can see through them both. They are then polarising the light in the same direction.

As you rotate one lens through 90

degrees the light passing through the lenses reduces because each lens is polarising the light in different directions. At 90 degrees there is minimum light throughput and we have crossed polarising filters. This is exactly what happens in a liquid crystal display.

A polarising filter and reflector are placed behind the liquid crystal that polarises light at right angles to the direction of polarisation produced by the crystals under the effect of an electric field. The net result is that where there is a field no light gets reflected from the display.

It is, therefore, very simple to make a display. Just paint the pattern you want to see with transparent conducting ink on both sides of a glass sandwich with a liquid crystal filling.

The problem comes when you try to make an electrical contact to the glass. Obviously it will not take solder so what is needed is some form of pressure contact. This is done with a rubber tube that has very fine concentric conducting rings.

This tube is then held under pressure between gold plated fingers on a printed circuit board and the liquid crystal sandwich. Be warned that once this tube has been removed it is quite difficult, if not impossible, to replace with all the contacts intact.

Sometimes the pattern is drawn on the inside of the sandwich to allow the connections to be made from one side only.

The most common pattern for a display is the seven segment format shown in Figure 1. The segments are lettered a to g (always lower case). However, any pattern can be drawn on the glass and sometimes whole words or phrases are produced.

In order to make numbers the seven segments must be controlled in the pattern shown in Figure 2. If we want to read a number we have to let the computer sense which segment is on and which is off.

If you study Figure 2 you will see that segments c and d are not required as the other five segments form a unique pattern for each displayed number. If we can input these five segments to our computer then we can use a look up

| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|
| a | ON | OFF | ON | ON | OFF | ON | ON | ON | ON | ON |
| b | ON | ON | ON | ON | ON | OFF | OFF | ON | ON | ON |
| c | ON | ON | OFF | ON | ON | ON | ON | ON | ON | ON |
| d | ON | OFF | ON | ON | OFF | ON | ON | OFF | ON | ON |
| e | ON | OFF | ON | OFF | OFF | OFF | ON | OFF | ON | OFF |
| f | ON | OFF | OFF | OFF | ON | ON | ON | OFF | ON | ON |
| g | OFF | OFF | ON | ON | ON | ON | ON | OFF | ON | ON |

Figure 2: Seven segment display encoding table

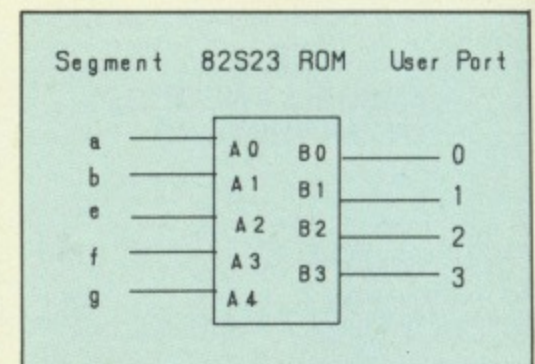


Figure 3: Using a fuse link rom to reduce the number of input lines to the computer

THE BEEB BODY BUILDING COURSE

table in software to convert the bit pattern to the required number.

With only 10 different numbers we need only four input lines to uniquely define each number and so to save a computer input line we could decode the segment bit pattern using a small fuse link rom as shown in Figure III. This would allow two digits to be read on an eight bit port.

So all we have to do is sense each segment and see if it is being turned on or off. And there, as the Bard put it, lies the rub.

You see, a liquid crystal display requires an AC electric field to work and to make matters worse there are a number of different ways of generating that field.

Let's start with the simplest form of display shown in Figure IV. This has one connection for each segment and a common connection for all the digits called a backplane. The backplane is fed with an AC signal and segments that are to be on are fed with a signal 180 degrees out of phase with this, whereas segments that are off are fed with a voltage in phase with the backplane. This is shown in Figure V.

So, to detect which segment is on, we have to find whether it is in or out of phase with the backplane. Fortunately this can be done very simply using an

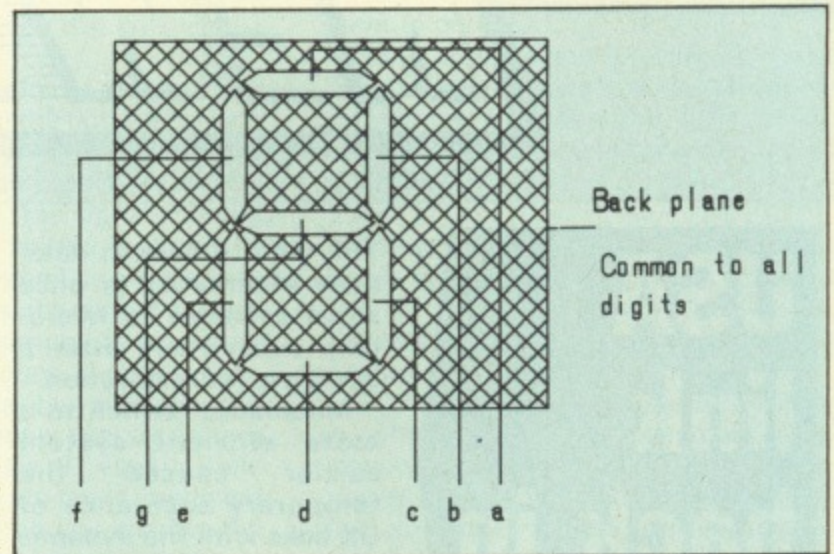


Figure IV: A conventional liquid crystal display


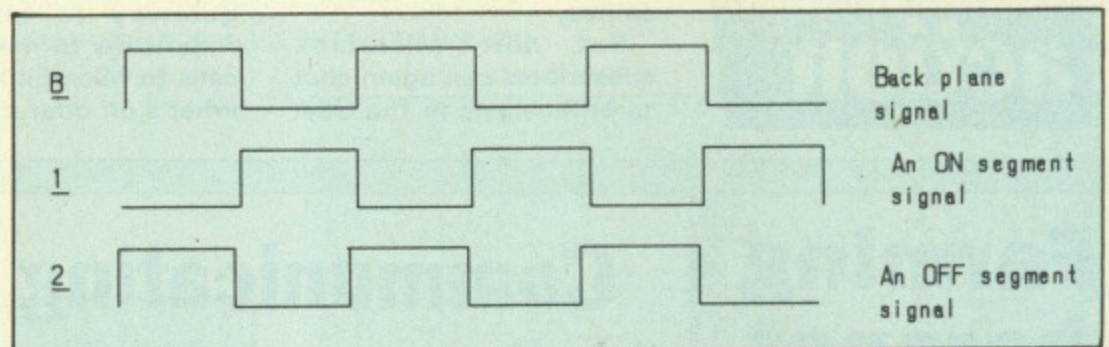


Figure V: Liquid crystal display waveforms

Figure VI: Circuit for recovering one segment from a conventional liquid crystal display

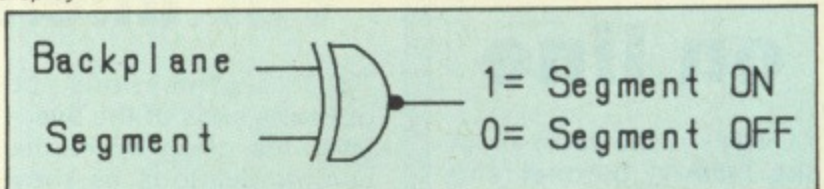

Exclusive OR gate as shown in Figure VI.

However, many consumer electronic devices do not work from 5 volts as the logic gates require and so the signals will have to be converted to this level using a comparator circuit as shown in Figure VII. Note that you can use the threshold control for all the segments you are reading and, in an LM399 IC, there are four identical comparators.

This simple form of driving a display requires a lot of connections, seven for each digit plus one for the backplane.

We could express this with the formula:

$$\text{Number of connections} = 7 * N + 1$$

Where N is the number of digits on the display. You can see that as N gets larger so does the number of connections used.

The major factor in determining the cost of manufacture for any electronic device is not its complexity but how many connections it possesses. So a different way of driving the seven segments has been devised known as the triplex system and this is the one you are most likely to come across.

It uses three backplane or common lines and three lines per digit, therefore the total number of lines needed to drive a triplex display is:

$$\text{Number of connections} = 3 * N + 3$$

As you can see this very quickly saves a lot of cost over the conventional system. This is bad news for us, however, as it requires much more complex waveforms to drive it.

Figure VIII shows the arrangement of a typical triplex display. The common lines on the back of the display (C1 - C3) match up with the three signal lines (X, Y, Z) on the front to form the segments.

Turn to Page 107 ►

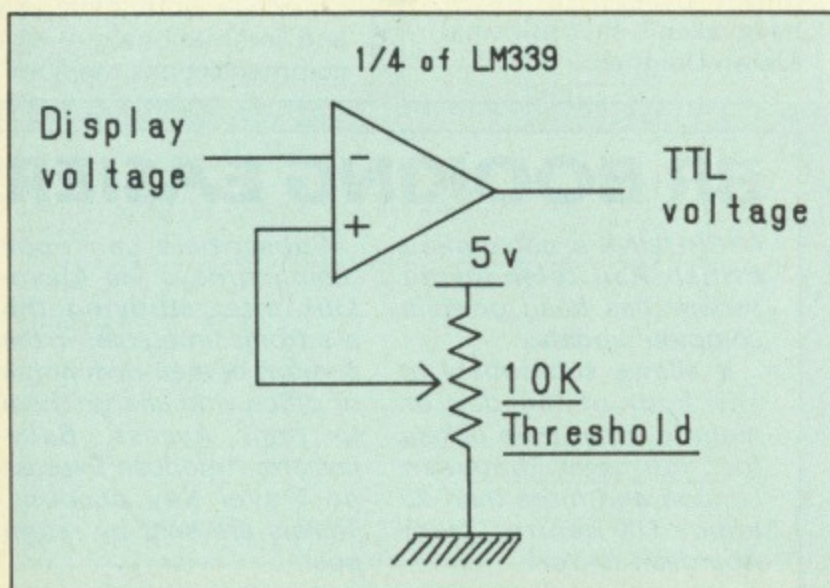


Figure VII: Circuit for converting display voltage to logic levels

USA link back in action

THE giant American database Mnemetics is once again available to MicroLink subscribers after a complete reorganisation.

Mnemetics' switch to a more efficient system carrier caused the temporary severance of UK links with the dynamic electronic information source.

But now MicroLink subscribers can again chat to enthusiasts in the USA

and tap the vast array of computer-related and special interest group sections.

All the old Mnemetics features are back – plus some new departments – and there are plans for even closer ties with MicroLink.

These include a reverse gateway to allow the Americans to make direct calls to MicroLink and see what's on offer over here.

A new line for the Church

COMPUTER communications systems like MicroLink have become a major focus of interest for Britain's churches.

A joint study of information technology is currently being undertaken by Church House, the Anglican Consultative Council and the British Council of Churches. It will eventually lead to more efficient electronic communication between churches all over the world.

Meanwhile similar assessments on a smaller scale are being conducted in just about every diocese in the UK. Typical of these is the one being done by the Rev Richard Thomas, communications officer for the Diocese of Winchester.

"I'm using MicroLink as part of my brief to explore the whole area of communications", he said.

"I believe electronic mail is going to become very important and I'm sure it has a lot to offer the Church – both nationally and internationally – as a communications medium".

Farming baronet on line

DOWN on the farm or in the factory, baronet and MicroLink subscriber Sir Charles Legard is equally at home thanks to computer communications.

Information technology makes sure he's always up to date with what's happening on his North Yorkshire estates in the Vale of Pickering as well as the family businesses in Leeds and Bradford.

Sir Charles farms 1,700 acres of arable land around Scampston Hall, Malton, in addition to running companies involved in engineering and wholesaling electrical components.

Legards have owned land in Yorkshire since the 12th Century, but the micro and modem are now as much a part of the scene at Scampston Hall as the family portraits.

"Whether I'm at home or in one of my offices, computer communications keep me constantly in touch with what's going on elsewhere", said Sir Charles.

Communicating to cut unemployment

TWO organisations at opposite ends of the spectrum are using MicroLink communications as they attempt to reduce unemployment.

Camden Jobtrain in North London provides local youngsters with opportunities to learn the specific skills which surveys have revealed are most wanted by employers in the area.

There are 120 places on courses in motor mechanics, carpentry and joinery, office skills, catering, and care for the elderly and young children – all leading to City and Guilds or other qualifications.

At the other end of the scale, the Mid-Career Development Centre in Croydon helps business and professional people who have been made redundant or want a more fulfilling job.

The Centre's experienced career counsellors provide individual help to restore confidence and practical assistance in getting a new job.

"Many people find that being made redundant turned out to be a lucky break because it galvanised them into action they might otherwise never have taken", says principal Kieran Duignan.

Your chance
to join
MicroLink
– turn to
Page 71

BR BOOKING EASIER

MICROLINK's convenient British Rail telebooking service has been given a complete update.

It allows subscribers at any hour of the day or night to order train tickets for journeys between London and more than 20 major UK centres from Aberdeen to York.

Subscribers can book their journeys via MicroLink after studying the electronic timetables in the comfort of their own home or office, and charge them to their Access, Barclaycard, American Express or Travel Key account. Tickets are sent by return post.

◀ From Page 105

These can be thought of as forming a capacitor to produce the polarising segments.

You can see that segment f is formed between signal lines C1 and X. In order to turn this segment on and not any others connected with these lines we need some very fancy waveforms.

These are shown in Figure IX but don't give up — they are understandable with a little effort.

The first thing you will notice about these waveforms is that they are no longer conventional logic signals that have two levels but instead they have four different levels which are equally spaced between the supply voltage ($V+$) and a display level (V_{dis}).

The latter voltage controls the contrast and to some extent the viewing angle. A control is usually available to alter this. The solid line in the centre is drawn to show the symmetry of the

waveform and show the display's virtual earth point.

The top three waveforms are the three common signals and the bottom four are the possible states of any of the X, Y or Z lines depending upon which segments are being turned on. The signal showing one segment on is shifted in phase by one clock cycle depending which segment it is. Similarly the signal for two segments on will change phase depending upon which two are being used.

So how can we possibly make sense of all this? Well, remember that a segment is on when it has an AC electric field across it so what we are really interested in is not the signal on any line but the signal across each segment. If this is small then the segment is off (or weakly polarised) and if it is large then the seg-

ment is on (or strongly polarised).

So in order to see the voltage across any one segment we have to look at the difference between the appropriate common line and the display line. I have done this in Figure X for the C1 and Y lines.

Remember from Figure VIII that the C1 line is connected to segments a, f and b and the Y line to segments a, g and d. Therefore, between them, lines C1 and Y control the a segment.

So Figure X shows the various voltage waveforms across the a segment for all possible states of the a, g and d segments. If you would like to construct this for yourself try superimposing a waveform on the C1 waveform.

Now, using C1 as the reference, how

Turn to Page 108 ▶

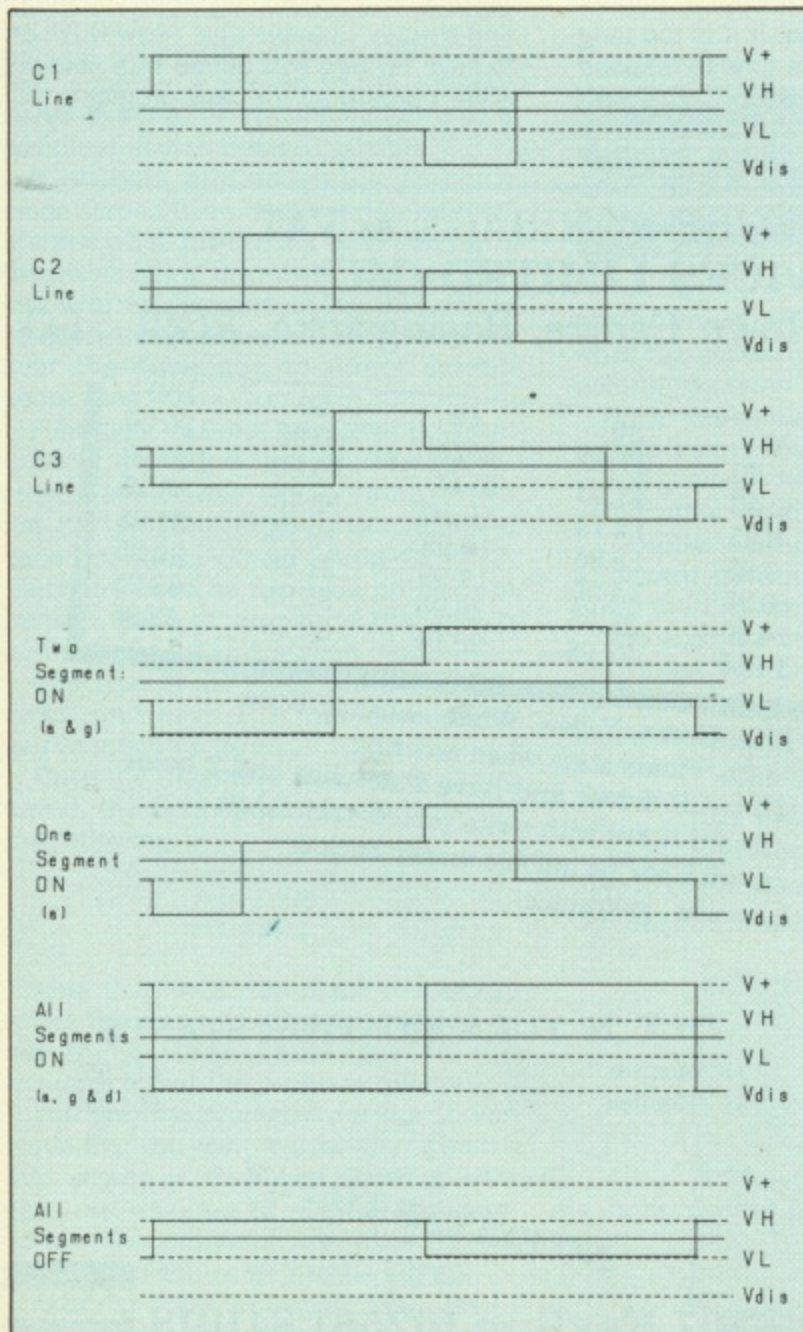


Figure IX: Driving waveforms for triplex LCD display

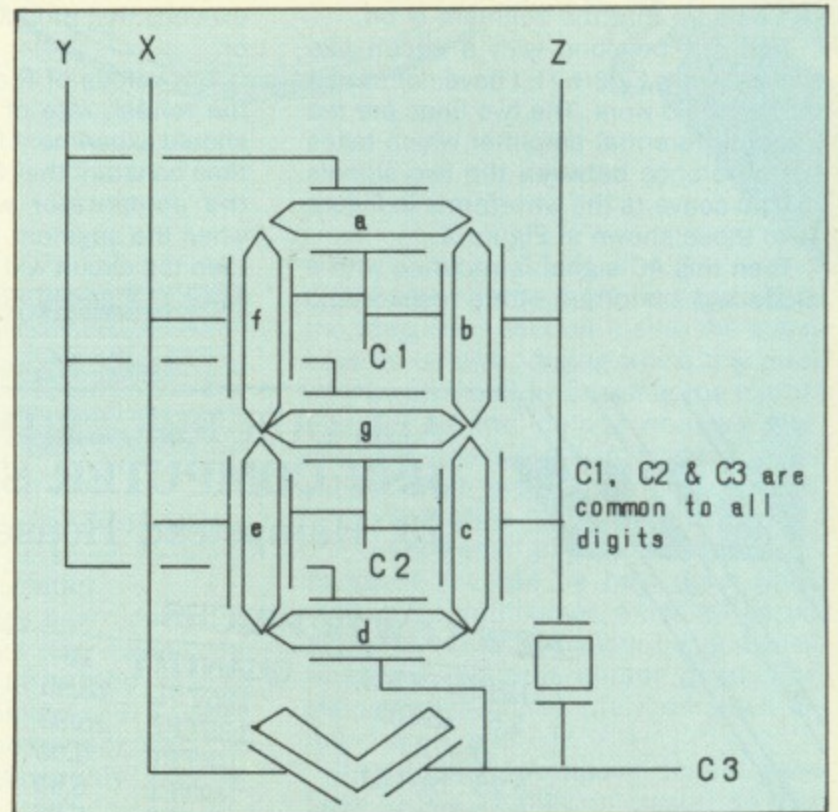


Figure VIII: A triplex seven segment display

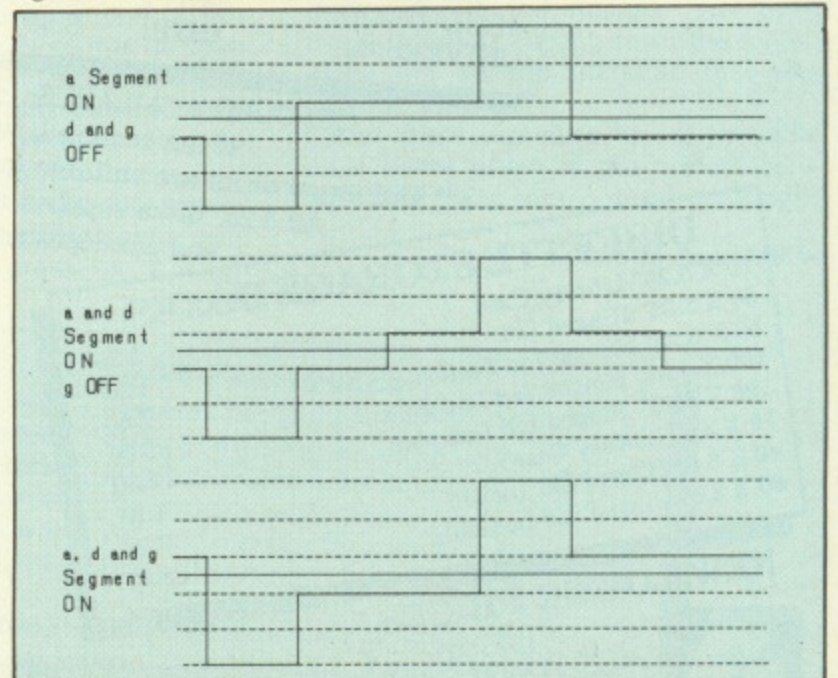


Figure X: Possible voltage waveforms across segment a

◀ From Page 107

many divisions up or down do you need to get to the Y signal level? Plot that number on a separate graph and you will get the waveforms shown in Figure X. You can even repeat the exercise for the C2 and C3 lines and other segments, you will find that the waveforms are all similar.

If we look at Figure X we should see a characteristic that will help us identify if the segment is on. Whenever a segment is on, the waveform peaks far higher than when it is off. This happens irrespective of the state of the other segments connected to the lines.

So what we need, in order to tap into a triplex display segment, is to monitor the difference between a common line and a signal line. When this difference becomes greater than a certain value we can be sure that the segment is on.

This can be done with a circuit like that shown in Figure XI, I have not tried it but it should work. The two lines are fed into a differential amplifier which takes the difference between the two signals and so converts the waveforms in Figure IX to those shown in Figure X.

Then this AC signal is rectified with a diode and smoothed with a resistor and

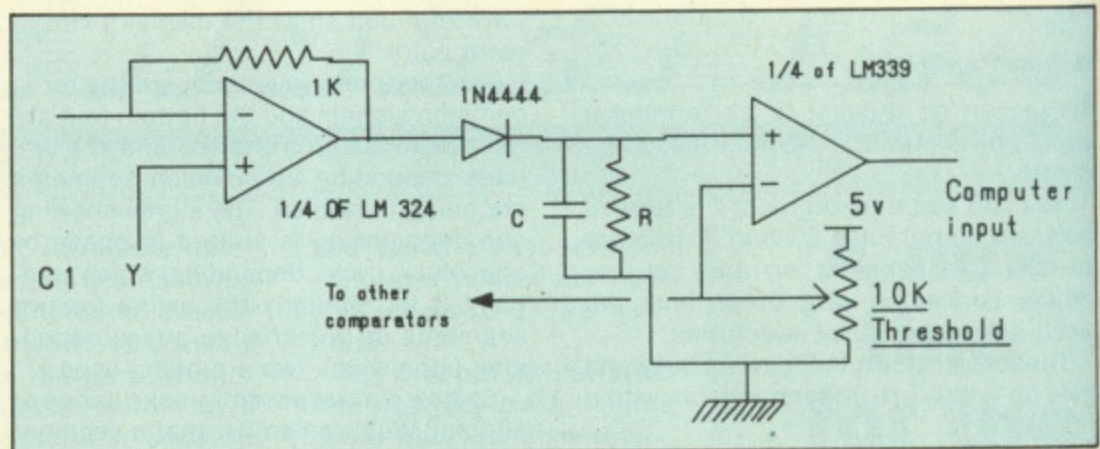


Figure XI: Circuit to recover one segment from a triplex display

capacitor. This produces a DC signal proportional to the peak height of the difference waveform. It is detected with a comparator to see if the signal exceeds that produced with the segment on.

The values of R and C will depend on the refresh rate of the display and you should experiment for best results. If the time constant they form is too short then the comparator will produce pulses when the segment is on. If it is too long then the circuit will take time to respond when a segment goes off.

Just to complicate matters there is another way of driving liquid crystal displays using a four signal multiplex but that is normally reserved for large area dot matrix displays and is even more complicated.

Unravelling the signals driving a liquid crystal display is like trying to unscramble an egg. It can be done but I will leave it to you to whether it is really worth it. You never know when you might find a really valuable egg. Anyway I'm off to have my egg soft boiled with soldiers while I dream up the next project.



**ALL OUR PRICES INCLUDE CARRIAGE & VAT
HSV COMPUTER SERVICES LIMITED (MU)**

23, Hampstead House, Town Centre, Basingstoke, RG21 1LG

NEW LOWER PRICES

| DISKETTES | QUANTITY | 10 | 20 | 30 | 40 | 50 | 100 |
|-------------|----------|-------|-------|-------|-------|-------|--------|
| 3.5" SS/DD | 135TPI | 13.95 | 26.50 | 37.50 | 49.00 | 60.00 | 110.00 |
| DS/DD | 135TPI | 15.95 | 30.50 | 43.50 | 57.00 | 70.00 | 130.00 |
| 5.25" SS/DD | 48TPI | 5.95 | 8.95 | 12.75 | 16.00 | 18.75 | 36.95 |
| DS/DD | 48TPI | 6.95 | 9.95 | 13.95 | 16.95 | 19.95 | 37.95 |
| DS/QD | 96TPI | 7.95 | 10.95 | 14.95 | 17.95 | 21.95 | 39.95 |
| ★COL DS/QD | 96TPI | 8.95 | 14.95 | 21.95 | 28.95 | 35.95 | 63.95 |
| UNIVERSAL | 96TPI | 8.95 | 14.95 | 21.95 | 28.95 | 35.95 | 63.95 |

COLOURS AVAILABLE: Red, Blue, Green, Yellow, White either in boxes of ten or mixed, two of each. Please state when ordering

** Universal disks are suitable for 40/80 track drives and have 2 notches and 2 holes
All 5.25" disks supplied in cardboard boxes with write protect tabs labels and envelopes and come with our no quibble money back or replacement guarantee.

DISKETTE STORAGE BOXES

| | |
|---------------------------------|-------|
| 10 X 5.25" Library Case | 1.25 |
| 50 X 5.25" Hinged Lid | 6.50 |
| 50 X 5.25" Hinged Lid Lockable | 7.50 |
| 100 X 5.25" Hinged Lid Lockable | 10.50 |
| 120 X 5.25" Hinged Lid Lockable | 12.50 |
| 10 X 3.5" Library Case | 1.25 |
| 40 X 3.5" Hinged Lid Lockable | 7.95 |
| 80 X 3.5" Hinged Lid Lockable | 10.95 |

NEW LOWER PRICES

TILT 'N' TURN MONITOR STANDS

| | |
|-------------|--------|
| 12" Monitor | £12.95 |
| 14" Monitor | £14.95 |

NO EXTRAS TO PAY



Credit Card Hotline (0256) 463507 Faxline (0256) 841018



Close encounter



USING a screen design package like MicroWorks (from the October issue of *The Micro User*) is very good for broad screen work. But sometimes you need to be able to edit the close-up detail of your screens.

Such precision work is best accomplished with a pixel editor, which magnifies a section of the screen and allows individual screen pixels to be easily changed.

This program may be used on its own with its simple but effective front end that enables a screen to be loaded/saved directly, or in conjunction with a complete screen design package.

It enables any area of a graphics mode screen to be magnified by a factor of three while facilitating easy editing of the pixels being displayed. It is compatible with all versions of the BBC Micro (except Archimedes) but will not work over the Tube due to direct screen addressing.

First type in and save the program Source, then use the checksums to correct any of your typing errors. When run the program creates two machine code routines, *Object1* and *Object2*, which are used by the main program to transfer data to and from the screen buffer in the various screen modes.

Now type in the main Basic program, Pixel, and save it — again ensuring you've made no errors.

Once the files have been entered and saved, the system can be run by typing the following:

```
PAGE=&1D00
CHAIN'PIXEL'
```

Note that PAGE, the place in memory where the Basic program is to reside, is set higher than usual due to the workspace that the program requires.

You are first prompted for the screen mode that you want to use, after which a title screen is displayed showing what keys are required to operate the pixel editor. The program then asks for the filename of the screen to be edited.

At this point you can also issue operating system commands using * followed by the command. Finally, a

Take a critical look at

your screen with Rob

Anderson's Pixel Editor

destination filename is required which is what the screen will be saved as when editing has been completed.

Once the screen has been loaded, a square cursor appears (the magnifying cursor), which may be moved around using either the cursor keys or Z, X, : and /. Double speed movement can be achieved by simultaneously holding down the Shift key.

The area contained in this square is magnified and displayed in one of two corners of the screen. Note that as soon as the cursor goes near the corner that's being used for the display it immediately flips to the opposite corner enabling the whole screen to be examined.

To change any of the individual pixels, simply move the magnifying cursor over the desired area and press Tab. A small

cursor may now be moved around within the magnified section (using the same keys as before), during which any pixel may be changed by pressing the logical number of the colour desired. For example, pressing 2 in Mode 1 gives yellow, while pressing F (hexadecimal) in mode 2 gives flashing White/Black.

If a number of pixels need changing, the Shift key can be held down while moving the edit cursor, which will result in the last selected colour being placed wherever the edit cursor goes. Any changes are immediately reflected on the main screen.

By pressing Tab again, control goes back to the magnifying cursor, so that other areas of the screen can be examined. Once all the changes have been made, pressing Escape saves the screen using the second filename that was input at the start.

And there you have it — a versatile pixel editor which is the perfect complement to any screen design package.

Turn to Page 110 ►

MAIN PROCEDURES

| | |
|---------------|--|
| wait | Prevents Tab key bounce |
| frontend | Sets up the program |
| initial | Loads files and sets variables |
| error | Reports any errors except Escape |
| box(x%,y%,m%) | Draws the magnifying cursor and image |
| quad(m%) | Draws quadrant surround and moves memory |
| finished | Removes all cursors and saves the screen |

◀ From Page 109

Program 1


```

10 REM Source
20 REM by Rob Anderson
30 REM (c) The Micro User
40 codestart%=8900
50 bufferpos%=&1100
60 PROCass1:PROCoutputinfo("1")
70 PROCass2:PROCoutputinfo("2")
80 END
90 DEFPROCoutputinfo(IS)
100 PRINT"OBJECT";IS;" compiled : "
110 PROCcli("SAVE OBJECT"+IS+" "+STR$
codestart%+" "+STR$PX)
120 PRINT"MemToScreen = &";"MemToScre
en
130 PRINT"ScreenToMem = &";"ScreenToMe
m
140 PRINT"Magnify = &";"Magnify
150 ENDPROC
160 DEFPROCass1
170 REM FOR MODES 0, 1, 2
180 FORpass%=0TO2 STEP 2
190 PX=codestart%
200 [OPTpass%
210 \ subroutine to dump the memory bu
ffer back to the screen (reinstating the
background)
220 .MemToScreen
230 LDY#0:LDA#(bufferpos%MOD256):STA&8
2:LDA#(bufferpos%DIV256):STA&83
240 .loop1
250 LDA(&82),Y:STA(&80),Y
260 INY:BNE loop1
270 LDY#0:LDA&80:CLC:ADC#&80:STA&80:LD
A&81:ADC#2:STA&81:INC&83:
280 LDA&83:CMP#(bufferpos%DIV256)+&C:B
NEloop1
290 RTS
300 \ subroutine to dump the part of t
he screen about to be covered by a quadr
ant to the buffer
310 .ScreenToMem
320 LDY#0:LDA#(bufferpos%MOD256):STA&8
2:LDA#(bufferpos%DIV256):STA&83
330 LDA&80:PHA:LDA&81:PHA
340 .loop2
350 LDA(&80),Y:STA(&82),Y
360 INY:BNE loop2
370 LDY#0:LDA&80:CLC:ADC#&80:STA&80:LD
A&81:ADC#2:STA&81:INC&83
380 LDA&83:CMP#(bufferpos%DIV256)+&C:B
NEloop2
390 PLA:STA&81:PLA:STA&80
400 JSR Magnify
410 RTS
420 .Magnify
430 LDA&80:PHA:LDA&81:PHA
440 LDA#0:STA&88:STA&89:STA&8A
450 .mainmagloop
460 LDY#0:LDX#0
470 .magloop
480 STY&87:LDY#0:LDA(&84),Y:STA&86:LDY
&87
490 \ find out which mode, and decode
pixels accordingly
500 LDA&8B:BEQinmode0:JMPmode1or2
510 .inmode0
520 \In mode 0
530 \pixel 1 & 2
540 LDA&86:AND#192
550 BEQblack1:CMP#64:BEQrwh1:CMP#128:
BEQlwh1:LDA#238:JMPend0pix1
560 .black1:LDA#0:JMPend0pix1
570 .rwh1:LDA#14:JMPend0pix1
580 .lwh1:LDA#224
590 .end0pix1:JSRprintpix
600 \pixel 3 & 4
610 LDA&86:AND#48
620 BEQblack2:CMP#16:BEQrwh2:CMP#32:B
EQlwh2:LDA#238:JMPend0pix2
630 .black2:LDA#0:JMPend0pix2
640 .rwh2:LDA#14:JMPend0pix2
650 .lwh2:LDA#224
660 .end0pix2:JSRprintpix
670 \pixel 5 & 6
680 LDA&86:AND#12
690 BEQblack3:CMP#4:BEQrwh3:CMP#8:BEQ
lwh3:LDA#238:JMPend0pix3
700 .black3:LDA#0:JMPend0pix3
710 .rwh3:LDA#14:JMPend0pix3
720 .lwh3:LDA#224
730 .end0pix3:JSRprintpix
740 \pixel 7 & 8
750 LDA&86:AND#3
760 BEQblack4:CMP#1:BEQrwh4:CMP#2:BEQ
lwh4:LDA#238:JMPend0pix4
770 .black4:LDA#0:JMPend0pix4
780 .rwh4:LDA#14:JMPend0pix4
790 .lwh4:LDA#224
800 .end0pix4:JSRprintpix
810 JMPcontinue
820 .mode1or2
830 CMP#1:BEQismode1:JMPismode2
840 .ismode1
850 \ In mode 1
860 \pixel 1
870 LDA&86:AND#136
880 BNEchkwh1:LDA#0:JMPend1pix1
890 .chkwh1:CMP#136:BNEchkyel1:LDA#23
8:JMPend1pix1
900 .chkyel1:CMP#128:BNEisred1:LDA#224
:JMPend1pix1
910 .isred1:LDA#14
920 .end1pix1:JSRprintpix
930 \pixel 2
940 LDA&86:AND#68
950 BNEchkwh2:LDA#0:JMPend1pix2
960 .chkwh2:CMP#68:BNEchkyel2:LDA#238
:JMPend1pix2
970 .chkyel2:CMP#64:BNEisred2:LDA#224:
JMPend1pix2
980 .isred2:LDA#14
990 .end1pix2:JSRprintpix
1000 \pixel 3
1010 LDA&86:AND#34
1020 BNEchkwh3:LDA#0:JMPend1pix3
1030 .chkwh3:CMP#34:BNEchkyel3:LDA#238
:JMPend1pix3
1040 .chkyel3:CMP#32:BNEisred3:LDA#224:
JMPend1pix3
1050 .isred3:LDA#14
1060 .end1pix3:JSRprintpix
1070 \pixel 4
1080 LDA&86:AND#17
1090 BNEchkwh4:LDA#0:JMPend1pix4
1100 .chkwh4:CMP#17:BNEchkyel4:LDA#238
:JMPend1pix4
1110 .chkyel4:CMP#16:BNEisred4:LDA#224:
JMPend1pix4
1120 .isred4:LDA#14
1130 .end1pix4:JSRprintpix
1140 JMPcontinue
1150 .ismode2
1160 \ is mode 2
1170 \pixel 1
1180 LDA&86:PHA:AND#170:STA&86:LSR A:OR
A &86:STA&86:JSRprintpix:LDA&86:AND#170:
JSRprintpix:PLA:STA&86
1190 \pixel 2
1200 LDA&86:PHA:AND#85:STA&86:ASL A:ORA
&86:STA&86:JSRprintpix:LDA&86:AND#170:J
SRprintpix:PLA:STA&86
1210 .continue
1220 LDA&84:CLC:ADC#8:STA&84:LDA&85:ADC
#0:STA&85:INX:CPX#8:BEQoutmag:JMPmagloop
:.outmag
1230 LDA&84:SEC:SBC#64:STA&84:LDA&85:SB
C#0:STA&85
1240 LDA&84:CLC:ADC#1:STA&84:LDA&85:ADC
#0:STA&85:INC&8A:LDA&8A:CMP#8:BNEcont:LD
A&84:CLC:ADC#78:STA&84:LDA&85:ADC#2:STA
&85:LDA#0:STA&8A:.cont
1250 LDA&88:BEQincy4
1260 LDA&80:CLC:ADC#7C:STA&80:LDA&81:A
DC#2:STA&81:LDA#0:STA&88:JMPfinal
1270 .incy4:LDA&80:CLC:ADC#4:STA&80:LD
A&81:ADC#0:STA&81:LDA#1:STA&88
1280 .final
1290 INC&89:LDA&89:CMP#24:BEQmagout:JMP
mainmagloop
1300 .magout
1310 PLA:STA&81:PLA:STA&80
1320 RTS
1330 \ Subroutine to output the magnifi
ed pixel held in A to the screen
1340 .printpix
1350 STA(&80),Y:INY:STA(&80),Y:INY:STA(
&80),Y:INY:LDA#0:STA(&80),Y:TYA:CLC:ADC#
5:TAY
1360 RTS
1370 ]
1380 NEXT
1390 ENDPROC
1400 DEFPROCass2
1410 REM FOR MODES 4 AND 5
1420 FORpass%=0TO2 STEP 2
1430 PX=codestart%
1440 [OPTpass%
1450 \ subroutine to dump the memory bu
ffer back to the screen (reinstating the
background)
1460 .MemToScreen
1470 LDY#0:LDA#(bufferpos%MOD256):STA&8
2:LDA#(bufferpos%DIV256):STA&83
1480 .loop1
1490 LDA(&82),Y:STA(&80),Y
1500 INY:CPY#128:BNE loop1
1510 LDY#0:LDA&80:CLC:ADC#64:STA&80:LDA
&81:ADC#1:STA&81:INC&83
1520 LDA&83:CMP#(bufferpos%DIV256)+&C:B
NEloop1
1530 RTS
1540 \ subroutine to dump the part of t
he screen about to be covered by a quadr
ant to the buffer
1550 .ScreenToMem
1560 LDY#0:LDA#(bufferpos%MOD256):STA&8
2:LDA#(bufferpos%DIV256):STA&83
1570 LDA&80:PHA:LDA&81:PHA
1580 .loop2
1590 LDA(&80),Y:STA(&82),Y
1600 INY:CPY#128:BNE loop2
1610 LDY#0:LDA&80:CLC:ADC#64:STA&80:LDA
&81:ADC#1:STA&81:INC&83
1620 LDA&83:CMP#(bufferpos%DIV256)+&C:B
NEloop2
1630 PLA:STA&81:PLA:STA&80
1640 JSR Magnify
1650 RTS
1660 .Magnify
1670 LDA&80:PHA:LDA&81:PHA
1680 LDA#0:STA&88:STA&89:STA&8A
1690 .mainmagloop
1700 LDY#0:LDX#0
1710 .magloop

```


ALPS - Adventure Language Programming System

Summit Software

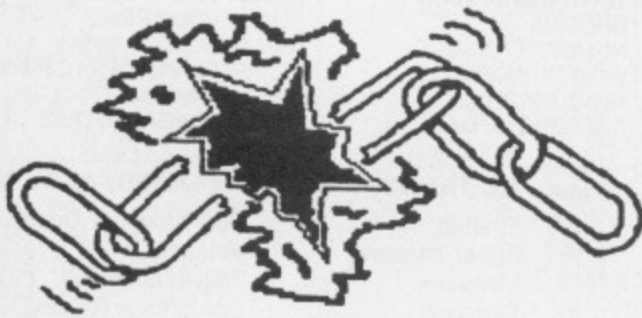

Unshackle your imagination with the power of ALPS

Because ALPS is a ROM it leaves you much more memory free for your games. You can have more evocative descriptions, a wider range of responses, better puzzles and so create more interesting adventures.

Features:

- Compatible with B, B+ and Master 128
- 16K Eprom • User Manual • Utility disk or tape
- Can create stand-alone games
- Sell your games and profit from your investment
- At least 27K free for data (using Rom)
- Multiple commands • Synonyms • Abbreviations
- Auto exit reporting • Text editor
- Text compression • Over 80 commands
- Easy data entry/editing
- Puzzles • Mazes • Locked doors • Traps
- Secret passages • Vehicles • and more . . .
- Includes a large secret agent style adventure

Order now or send an SAE for further details

To order ALPS, simply send details of your requirements with your name, address and cheque, postal order or Access/Visa card number to:

Summit Software (Dept. MU)
PO Box 25, Portadown
CRAIGAVON
BT63 5UT

Or Telephone: 0762 42510

Prices (inc. P&P):

Cassette £27.95

Disk £28.95

(Disk users specify 40 or 80 tracks)

Watch out for further products in the Summit Software range

Trade enquiries welcome




Fast Flexible Professional Software

Individual programs designed to integrate, use separately or link together to form a powerful system. Systems Delta, Gamma and Sigma designed by highly acclaimed professional programmers with proven ability on the BBC, now providing definitive software for the Archimedes.

A R C H I M E D E S
 DeltaBase £29.95 Extremely powerful yet simple to use general Database. 8160 records. Import data from other databases.
 System DeltaPlus £69.95 Extensive Relational Database Management System. WIMP card index 2 billion records.
 GammaPlot £34.95 Versatile Graphics program. Multiple charts on screen at any time.
 System GammaPlus £69.95 Graphics Management System. Available October 1987.
 System Sigma t.b.a. Powerful Spreadsheet Management System. The only flexible accounting suite. Use modules separately or integrate.
 System Delta Personal Accountant £69.95 each module
 Order Processing/Invoicing, Sales Ledger, Stock Management, Purchase Ledger, Nominal Ledger.

B B C M I C R O
 Minotaur Game £14.95 Flexible specialist software available for School Administrator, Video Rental, Newsagent, Hotelier, Genealogy.
 System Delta with Card Index £64.95 Full feature 3 dimensional animated maze type game. Use brains or force to kill the Minotaur.
 Friendly user Card Index. 8160 records, 255 fields. Finds unique record in 3 secs. Versatile search, maths & sort by any criteria. Add fields/change layout after entry of records. Programmable commands if required.
 Mailshot, Reporter and InterView Link £19.95 each Three versatile support programs for use with all System Delta files. Mailshot - up to 4 across labels, produces mail-merged documents. Reporter for simple lists or complex reports. InterView link transfers data directly or as a result of any calculation.
 System Delta Personal Accountant £45.95 (Nominal £55.95) Five comprehensive accounting modules which may be integrated if required. Many advanced features. Definable invoice layouts, archive mail order customers for mailshots, add new credit account at time of invoicing, generates purchase orders, suggests stock levels, determines most profitable stock items, stock and sales graphs, unlimited bank accounts.
 Order Processing/Invoicing, Sales Ledger, Stock Management, Purchase Ledger, Nominal Ledger
 School Administrator £69.95 Pupil and staff records, add extra fields if desired. Entry reports for examination boards. Form 7 DES statistics, etc.
 Specialist Applications from £54.95 Comprehensive management programs for Hotelier, Video Rental and Newsagent.
 System Gamma £49.95 The first Graphics Management System. Anyone can produce stunning graphics and charts easily from the menu driven GammaPlot supplied. Multiple charts or text on screen at any one time and in any position desired. Various text fonts. Statistical analysis. Macro facility. Entry by keyboard or System Delta files. Fully programmable.
 Font Generator £19.95 Create your own fonts or use the five provided. Simple to use facilities include grid for sizing, slanting, etc. Use with Kaga and Canon Printers.

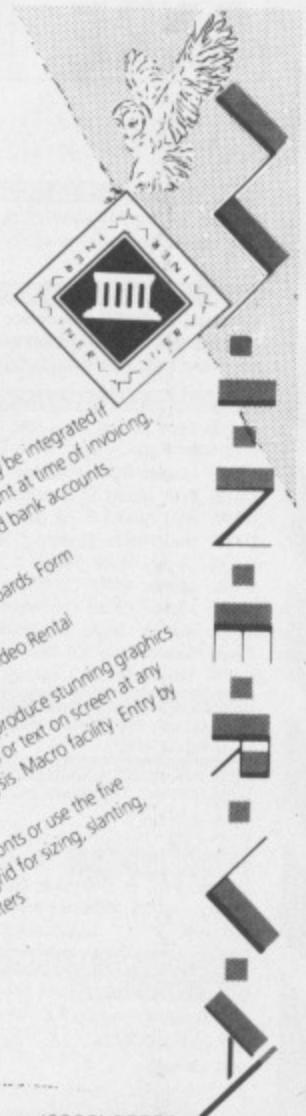

COMPUTER SOFTWARE AND SYSTEMS SPECIALISTS 69 Sidwell Street · Exeter · Devon EX4 6PH · Telephone: (0392) 37756

SOFTWARE AT BARGAIN PRICES

| | | | | |
|---|--|---|--|--|
| ED 1. GCE/CSE MATHS 1 MATHS 2 ENGLISH BIOLOGY LINKWORD ITALIAN £8 | GP 1. A/SOFT FREE FALL JCB DIGGER CAROUSEL TETRAPOD CRAZY TRACER METEORS OR MONSTERS £6 | GP2. SUPERIOR WALLABY SMASH & GRAB MR. WIZ QBERT SPITFIRE COMMAND HUNCHBACK £5 | ED 2. Junior Education TURTLE GRAPHICS DROGNA NUMBER CHASER WORDS, WORDS HI BOUNCER CAESER THE CAT £9 | IP 1. Home Interest KNOW YOUR PERSONALITY KNOW YOUR PS/0 BLACK BOX & GAMBIT JOFFE PLAN (Weight Control) ME & MY MICRO I DO OR THEATRE QUIZ £7 |
|---|--|---|--|--|

| | | | | | | |
|------------------------------|-------------|-------------|---|----------------------|-------------|--|
| CURRENT TITLES | Disk | Cass | CURRENT TITLES | Disk | Cass | ACORNSOFT BBC 'B' (TAPES) @ £1.50 |
| Palace of Magic | 9.95 | 7.50 | Living Daylights | 12.95 | 7.50 | Firebug |
| Crazy Rider | 9.95 | 7.50 | Paperboy | 12.95 | 7.50 | Super Invaders |
| Codename Droid | 9.95 | 7.50 | BUDGET & BARGAIN TITLES (Tape) | | | Monsters |
| Strykers Run | 9.95 | 7.50 | SUPERIOR TAPES BBC @ £1.99 | | | Tetrapod |
| Repton 40 Screens | 6.75 | 5.50 | Wallaby | Spitfire Command | | Meteors |
| Revs + 4 Tracks | 12.95 | 10.50 | Star Warp | Star Striker | | Boxer |
| Grand Prix Construction | 9.95 | 7.50 | Qbert | Percy Penguin | | Cube Master |
| Repton 3 | 9.95 | 7.50 | Battle Tak Nk | Smash & Grab | | Sliding Block Puzzle |
| Ravenskull | 9.95 | 7.50 | Zany Kong Junior | Overdrive | | Free Fall |
| Superior Collection Vol1 | 9.95 | 7.50 | Missile Strike | Hunchback | | Crazy Tracer |
| Superior Collection Vol2 | 9.95 | 7.50 | Mr. Wiz | Jack & the Beanstalk | | JCB Digger |
| XOR (Game) | 12.95 | 7.50 | MICROSOFT EDUCATIONAL @ £2.99 | | | Drogna |
| Sentinel | 12.95 | 7.50 | Count With Oliver | Look Sharp | | |
| Cholo | 15.25 | — | Joffe Plans | Caesar the Cat | | |
| Dunjanz | 6.50 | 2.99 | (Weight Watching) | Hi-Bouncer | | |
| Argus Compilation (Bug Byte) | 6.50 | — | Know your PS/0 | Star Seeker | | |
| Colossus Chess | 12.95 | 7.50 | Know your Personality | | | |
| The Hunt | 10.95 | 7.50 | | | | |

MARTECH SPECIALS ON DISK
WAR
Sam Fox Strip Poker
£4.50 each

TOWERHILL COMPUTERS LTD



Unit 2 Wharfside
Fenny Stratford, Milton Keynes, MK2 2AZ.
Telephone: Milton Keynes (0908) 74246



ALL PRICES INCLUDE V.A.T. AND P&P. OVERSEAS ORDERS ADD £1.00

CARE ELECTRONICS

Open
Mon - Thurs 9am - 5pm
Fri - Sat 9am - 4pm

800 ST ALBANS ROAD,
GARSTON, WATFORD,
HERTS. WD2 6NL. Tel: 0923 672102
Price Each = Ex Vat: Inc Vat:

SPECIAL 3.5" & 5.25" COMBINED DISC DRIVE UNIT:
Suitable for the ARCHIMEDES, BBC B, MASTER, COMPACT, IBM PS/2 etc. Boot off any drive, definable selection of drive number, i.e. 0, 1, 2, 3.5/5.25 DISC DRIVE UNIT
@ £190.00 £218.50b

CARE MASTER ROM CARTRIDGES:
Designed by CARE Electronics to Acorn Specifications. Capable of taking up to 2 or 4 x 16K Eproms. Including Inter-word and Spellmaster. CARE Cartridges offer 4 options for maximum user flexibility. 1: Standard Cartridge. 2: Single Zif. 3: Dual Zif. 4: Quad.

CARE MASTER SMART CARTRIDGE:
Freeze Prog at any point and dump Screen to Disc/Printer. Copies 99% of Protected programs. Tape - Disc, Disc-Tape, ASCII Dump and much, much more.

| | | |
|--|----------|---------|
| CARE Master ROM Extender | @ £12.00 | £13.80c |
| CARE BBC Model B Cartridges | @ £3.00 | £3.45c |
| CARE BBC Model B Zif Cartridges | @ £7.00 | £8.05c |
| CARE Low Profile System (The Original) | @ £11.00 | £12.65d |
| CARE Library Rack (Holds 6 Cartridges) | @ £1.60 | £1.84c |
| CARE Master ROM Cartridge | @ £8.00 | £9.20c |
| CARE Master Quad Cartridge | @ £13.00 | £14.95c |
| CARE Master Single Zif Cartridge | @ £12.80 | £14.72c |
| CARE Master Dual Zif Cartridge | @ £17.00 | £19.55c |
| CARE Master Smart Cartridge | @ £34.60 | £39.79c |

POWER SUPPLIES:
For use with Disc Drives (Not old full height type)
Dual BBC Outlets @ £30.00 £34.50b

CARE PRINTER BUFFER: (For Master & Compact/Model B&B+)
Uses S/RAM, Any Spare I/O, Completely User Definable.
Rom Version @ £14.00 £16.10d
5.25" Disc Version @ £13.00 £14.95d

LABELMASTER: Comprehensive label printing program for Education or Business. Master, BBC B, Compact, Electron with DFS. Menu driven, Two modes Message or Address labels, different print styles & underline, italicised etc. Please state disc format required. ***** LABELMASTER @ £15.00 £17.25

GOVERNMENT & EDUCATION ORDERS WELCOME
HOW TO ORDER: All prices inclusive of VAT. By Post.
Enclose your cheque/P.O. made payable to CARE Electronics. Or use your ACCESS/VISA. Please allow 7 days for delivery. Please add carriage.
a = £10.35 b = £5.75 c = £1.15 d = £2.30

SOFTWARE:

| | | |
|--|------------------|------------------|
| Inter-word The Word Processor | Ex Vat: @ £47.80 | Inc Vat: £54.97c |
| Spell-Master Ultimate Spelling Checker | @ £50.00 | £57.50c |
| Inter-base Database | @ £58.00 | £66.70c |
| MINERVA Archimedes Software Available | | |

PHILIPS MONITORS & TV/MONITORS inc. lead:
Suitable for BBC B, Master & Archimedes computers

| | | |
|----------------------------------|-----------|----------|
| Philips 8833 Medium Res Colour | @ £252.20 | £290.03a |
| Philips AV7300 TV/Tuner for 8833 | @ £65.00 | £74.75b |
| Philips 1010 TV/Monitor | @ £228.00 | £262.20a |
| Philips 1210 Remote TV/Monitor | @ £250.00 | £287.50a |

READY MADE LEADS: (Wider range available)

| | | |
|---------------------------------|----------------|---------|
| Centronics to Centronics | 1.5mt @ £11.00 | £12.65c |
| Disc Drive Data (Single) | 1.2mt @ £6.00 | £6.90c |
| Disc Drive Data (Dual) | 1.5mt @ £8.00 | £9.20c |
| Archimedes-6 pin RGB | 1.2mt @ £7.60 | £8.74c |
| Archimedes-7 pin Hitachi RGB | 1.2mt @ £8.00 | £9.20c |
| Archimedes-7 pin Ferguson RGB | 1.2mt @ £8.00 | £9.20c |
| Archimedes-Scart (Euro) | 1.5mt @ £10.00 | £11.50c |
| Printer (BBC to Centronic) | 1.5mt @ £7.00 | £8.05c |
| RGB 6-7 pin DIN (Hitachi) | 1.2mt @ £6.20 | £7.13c |
| RGB 6-7 pin DIN (Ferguson) | 1.2mt @ £6.20 | £7.13c |
| RGB 6 pin to SCART | 1.2mt @ £8.20 | £9.43c |
| User Port Extension Skt to Plug | .5mt @ £9.00 | £10.35c |
| Printer Extension Skt to Plug | 1mt @ £10.20 | £11.73c |
| 1MZ Bus Extension Skt to Plug | .3mt @ £10.40 | £11.96c |

SWITCHING UNITS:



| | | |
|---------------------------------------|----------|---------|
| BBC Printer 6 to 1 | @ £71.00 | £81.65d |
| Centronics 2 to 1 (Inc Lead) | @ £30.00 | £34.50d |
| Centronics 4 to 1 (Inc Lead) | @ £70.00 | £80.50d |
| Centronics 2 to 2 'X' Switcher | @ £70.00 | £80.50d |
| User Port 2 way & Off Posn (Inc Lead) | @ £33.00 | £37.95d |
| User Port 6 way & Off Posn (Inc Lead) | @ £72.00 | £82.80d |
| RGB Switcher 2 to 1 | @ £20.20 | £23.23d |
| RS423 2 to 1 | @ £20.20 | £23.23d |

MORLEY ELECTRONICS PRODUCTS:

| | | |
|---|----------|---------|
| Teletext Adaptor ATS Software on ROM | @ £86.94 | £99.98d |
| Eprom Programmer Software on ROM | @ £30.00 | £34.50d |
| CARE Deluxe Eprom Programmer capable of programming C'mos & Standard Eproms 2732, 2764, 27128 & 27256 Software on ROM | @ £33.00 | £37.95d |

◀ From Page 110

```

1720 STY&87:LDY#0:LDA(884),Y:STA&86:LDY
887
1730 \ find out which mode, and decode
pixels accordingly
1740 LDA&8B:CMPI#4:BEQmode4:JMPmode5
1750 .mode4
1760 \pixel 1 & 2
1770 LDA&86:AND#192
1780 BEQblack1:CMPI#64:BEQrwh1:CMPI#128:
BEQlwht1:LDA#238:JMPend4pix1
1790 .black1:LDA#0:JMPend4pix1
1800 .rwh1:LDA#14:JMPend4pix1
1810 .lwht1:LDA#224
1820 .end4pix1:JSRprintpix
1830 \pixel 3 & 4
1840 LDA&86:AND#48
1850 BEQblack2:CMPI#16:BEQrwh2:CMPI#32:
BEQlwht2:LDA#238:JMPend4pix2
1860 .black2:LDA#0:JMPend4pix2
1870 .rwh2:LDA#14:JMPend4pix2
1880 .lwht2:LDA#224
1890 .end4pix2:JSRprintpix
1900 \pixel 5 & 6
1910 LDA&86:AND#12
1920 BEQblack3:CMPI#4:BEQrwh3:CMPI#8:BEQ
lwht3:LDA#238:JMPend4pix3

```

```

1930 .black3:LDA#0:JMPend4pix3
1940 .rwh3:LDA#14:JMPend4pix3
1950 .lwht3:LDA#224
1960 .end4pix3:JSRprintpix
1970 \pixel 7 & 8
1980 LDA&86:AND#3
1990 BEQblack4:CMPI#1:BEQrwh4:CMPI#2:BEQ
lwht4:LDA#238:JMPend4pix4
2000 .black4:LDA#0:JMPend4pix4
2010 .rwh4:LDA#14:JMPend4pix4
2020 .lwht4:LDA#224
2030 .end4pix4:JSRprintpix
2040 JMPcontinue
2050 .mode5
2060 \ In mode 5
2070 \pixel 1
2080 LDA&86:AND#136
2090 BNEchkwh1:LDA#0:JMPend5pix1
2100 .chkwh1:CMPI#136:BNEchkyel1:LDA#23
8:JMPend5pix1
2110 .chkyel1:CMPI#128:BNEisred1:LDA#224
:JMPend5pix1
2120 .isred1:LDA#14
2130 .end5pix1:JSRprintpix
2140 \pixel 2
2150 LDA&86:AND#68
2160 BNEchkwh2:LDA#0:JMPend5pix2
2170 .chkwh2:CMPI#68:BNEchkyel2:LDA#238
:JMPend5pix2
2180 .chkyel2:CMPI#64:BNEisred2:LDA#224:
JMPend5pix2
2190 .isred2:LDA#14
2200 .end5pix2:JSRprintpix

```

```

2210 \pixel 3
2220 LDA&86:AND#34
2230 BNEchkwh3:LDA#0:JMPend5pix3
2240 .chkwh3:CMPI#34:BNEchkyel3:LDA#238
:JMPend5pix3
2250 .chkyel3:CMPI#32:BNEisred3:LDA#224:
JMPend5pix3
2260 .isred3:LDA#14
2270 .end5pix3:JSRprintpix
2280 \pixel 4
2290 LDA&86:AND#17
2300 BNEchkwh4:LDA#0:JMPend5pix4
2310 .chkwh4:CMPI#17:BNEchkyel4:LDA#238
:JMPend5pix4
2320 .chkyel4:CMPI#16:BNEisred4:LDA#224:
JMPend5pix4
2330 .isred4:LDA#14
2340 .end5pix4:JSRprintpix
2350 .continue
2360 LDA&84:CLC:ADC#8:STA&84:LDA&85:ADC
#0:STA&85:INX:CPX#4:BEQoutmag:JMPmagloop
:.outmag
2370 LDA&84:SEC:SBC#32:STA&84:LDA&85:SB
C#0:STA&85
2380 LDA&84:CLC:ADC#1:STA&84:LDA&85:ADC
#0:STA&85:INC&8A:LDA&8A:CMPI#8:BNEcont:LD
A&84:CLC:ADC#56:STA&84:LDA&85:ADC#1:STA&
85:LDA#0:STA&8A:.cont
2390 LDA&88:BEQincby4
2400 LDA&80:CLC:ADC#60:STA&80:LDA&81:AD
C#1:STA&81:LDA#0:STA&88:JMPfinal
2410 .incby4:LDA&80:CLC:ADC#4:STA&80:LD
A&81:ADC#0:STA&81:LDA#1:STA&88
2420 .final
2430 INC&89:LDA&89:CMPI#24:BEQmagout:JMP
mainmagloop
2440 .magout
2450 PLA:STA&81:PLA:STA&80
2460 RTS
2470 \ Subroutine to output the magnifi
ed pixel held in A to the screen
2480 .printpix
2490 STA(880),Y:INY:STA(880),Y:INY:STA(
880),Y:INY:LDA#0:STA(880),Y:TYA:CLC:ADC#
5:TAY
2500 RTS
2510 J:NEXT:ENDPROC

```



| | | |
|--------------|--------------|---------------|
| 10 = 00 | 430 = BE37 3 | 850 = 0D |
| 20 = 00 | 440 = 2D81 9 | 860 = 0D |
| 30 = 00 | 450 = 4F82 8 | 870 = 4D21 9 |
| 40 = 4D1E E | 460 = 4971 A | 880 = 069 D |
| 50 = 4A00 F | 470 = 1CE0 B | 890 = B508 0 |
| 60 = 27BD D | 480 = C821 0 | 900 = F317 1 |
| 70 = 7E9F 8 | 490 = 00 | 910 = E67D 2 |
| 80 = FD2E 3 | 500 = 8B23 5 | 920 = A9C0 7 |
| 90 = DFB7 1 | 510 = 92A9 6 | 930 = 07 |
| 100 = 9119 F | 520 = 06 | 940 = 1FA1 A |
| 110 = 3F75 6 | 530 = 06 | 950 = 4F0A C |
| 120 = 5D2 3 | 540 = E26E 2 | 960 = 42B1 2 |
| 130 = 6EC7 B | 550 = 1BEF D | 970 = C66 F |
| 140 = 212B E | 560 = C507 6 | 980 = 2E08 E |
| 150 = ED0F E | 570 = C80C 7 | 990 = 6665 A |
| 160 = 4464 B | 580 = 341B 8 | 1000 = 0A |
| 170 = 0B | 590 = B922 E | 1010 = 21D8 8 |
| 180 = 82D6 6 | 600 = 0E | 1020 = 8134 9 |
| 190 = 1CCB 3 | 610 = 79C3 F | 1030 = A469 F |
| 200 = 2159 1 | 620 = C33E 7 | 1040 = 15C0 3 |
| 210 = 01 | 630 = 8764 A | 1050 = 69D0 D |
| 220 = 2CA3 5 | 640 = A6BA 3 | 1060 = 2306 9 |
| 230 = D3E6 0 | 650 = 195F A | 1070 = 09 |
| 240 = 3311 8 | 660 = 7687 5 | 1080 = 77D9 3 |
| 250 = D7AE C | 670 = 05 | 1090 = CBCC 1 |
| 260 = 6DCC E | 680 = 277C 5 | 1100 = CC0B 7 |
| 270 = 31E3 7 | 690 = 383C 6 | 1110 = 594E 6 |
| 280 = 491B 1 | 700 = 495A 6 | 1120 = AEC3 F |
| 290 = 9843 A | 710 = 8328 E | 1130 = E90E 0 |
| 300 = 0A | 720 = F27C 2 | 1140 = 668B 5 |
| 310 = 5760 7 | 730 = 33E4 1 | 1150 = E62C 8 |
| 320 = D3E6 A | 740 = 01 | 1160 = 08 |
| 330 = BE37 1 | 750 = E1BA 3 | 1170 = 08 |
| 340 = 372 B | 760 = BCCE 6 | 1180 = BF61 4 |
| 350 = 771F 3 | 770 = 3A2 A | 1190 = 04 |
| 360 = 5DAF 3 | 780 = 7BD6 A | 1200 = 3E8F 4 |
| 370 = B111 F | 790 = 43D7 B | 1210 = 2EE E |
| 380 = 7978 C | 800 = F9EC E | 1220 = 4737 B |
| 390 = 4D7 D | 810 = 668B E | 1230 = 62D1 0 |
| 400 = 4395 A | 820 = C0BB B | 1240 = 6B44 9 |
| 410 = 9843 4 | 830 = 25AE 7 | 1250 = 3F69 4 |
| 420 = 66F A | 840 = D64F D | 1260 = 37F1 1 |

| | | |
|---------------|---------------|---------------|
| 1270 = F241 4 | 1690 = 4F82 9 | 2110 = 7A11 5 |
| 1280 = DE0C D | 1700 = 4971 C | 2120 = E67D 0 |
| 1290 = 2FB8 4 | 1710 = 1CE0 7 | 2130 = EA48 D |
| 1300 = 88B2 A | 1720 = C821 B | 2140 = 0D |
| 1310 = 4D7 6 | 1730 = 0B | 2150 = 1FA1 D |
| 1320 = 9843 C | 1740 = D992 E | 2160 = C60C 8 |
| 1330 = 0C | 1750 = C592 C | 2170 = CBB7 C |
| 1340 = 5F2A 0 | 1760 = 0C | 2180 = 8560 A |
| 1350 = 5027 D | 1770 = E26E E | 2190 = 2E08 0 |
| 1360 = 9843 7 | 1780 = 92E9 D | 2200 = 25ED B |
| 1370 = 8B58 1 | 1790 = 4C01 D | 2210 = 0B |
| 1380 = 2C83 B | 1800 = 410A D | 2220 = 21D8 F |
| 1390 = ED0F 1 | 1810 = 341B D | 2230 = 832 E |
| 1400 = 7407 D | 1820 = FAAA E | 2240 = 2D6F 3 |
| 1410 = 0D | 1830 = 0E | 2250 = 9CC6 F |
| 1420 = 82D6 3 | 1840 = 79C3 6 | 2260 = 69DB 7 |
| 1430 = 1CCB E | 1850 = 4A38 0 | 2270 = 608E F |
| 1440 = 2159 5 | 1860 = E62 0 | 2280 = 0F |
| 1450 = 05 | 1870 = 2FBC 5 | 2290 = 77D9 6 |
| 1460 = 2CA3 9 | 1880 = 195F 9 | 2300 = 42CA 0 |
| 1470 = D3E6 B | 1890 = 350F 3 | 2310 = 450D E |
| 1480 = 3311 1 | 1900 = 03 | 2320 = D048 2 |
| 1490 = D7AE 9 | 1910 = 277C F | 2330 = AEC3 5 |
| 1500 = BD6A C | 1920 = B13A C | 2340 = AA86 A |
| 1510 = 1797 B | 1930 = C05C B | 2350 = 2EE E |
| 1520 = 491B 7 | 1940 = A2E 4 | 2360 = 2BB3 3 |
| 1530 = 9843 9 | 1950 = F27C 5 | 2370 = BAB4 0 |
| 1540 = 09 | 1960 = 706C 8 | 2380 = E26C 6 |
| 1550 = 5760 A | 1970 = 08 | 2390 = 3F69 3 |
| 1560 = D3E6 0 | 1980 = E1BA A | 2400 = 70B1 B |
| 1570 = BE37 2 | 1990 = 35E8 B | 2410 = F241 9 |
| 1580 = 372 6 | 2000 = 8AA4 B | 2420 = DE0C 4 |
| 1590 = 771F 8 | 2010 = F2D0 2 | 2430 = 2FB8 4 |
| 1600 = 8D09 2 | 2020 = 43D7 2 | 2440 = 88B2 7 |
| 1610 = 1797 3 | 2030 = BA64 0 | 2450 = 4D7 8 |
| 1620 = 7978 8 | 2040 = 668B 5 | 2460 = 9843 E |
| 1630 = 4D7 9 | 2050 = D5B3 D | 2470 = 0E |
| 1640 = 4395 6 | 2060 = 0D | 2480 = 5F2A 1 |
| 1650 = 9843 F | 2070 = 0D | 2490 = 5027 6 |
| 1660 = 66F 2 | 2080 = 4D21 1 | 2500 = 9843 B |
| 1670 = BE37 B | 2090 = 846F 8 | 2510 = 953B 5 |
| 1680 = 2D81 5 | 2100 = 3C0E C | |

Program II

```

10 REM PIXEL EDITOR
20 REM by Rob Anderson
30 REM (c) The Micro User
40 HIMEM=83000
50 *FX200,1
60 ONERRORPROCerror
70 PROCfrontend
80 PROCinitial
90 VDU5:PROCquad(2):PROCbox(x%,y%,1)
100 REPEAT
110 REPEAT
120 IFFNescape escape%=TRUE
130 fl%=FALSE:ox%=x%:oy%=y%
140 IFFNshift xstep%=64:ystep%=64ELSEx
step%=magstep%:ystep%=32
150 IFFNleft x%=x%-xstep%:fl%=TRUE
160 IFFNright x%=x%+xstep%:fl%=TRUE
170 IFFNup y%=y%+ystep%:fl%=TRUE
180 IFFNdown y%=y%-ystep%:fl%=TRUE
190 IFx%<-4 x%=-4ELSEIFx%>1148 x%=1148
200 IFy%<96 y%=96 ELSEIFy%>1024y%=1024
210 IF x%>628ANDy%<486ANDquad%=2 PROCq
uad(1):quad%=1:PROCquad(2)
220 IF x%<516ANDy%>632ANDquad%=1 PROCq
uad(1):quad%=2:PROCquad(2)

```

Turn to Page 114 ▶

UTILITY

◀ From Page 113

```

230 IFFLXPROCbox(ox%,oy%,2):PROCbox(x%
,y%,1):fl%=FALSE
240 UNTILFNtab ORescape%
250 IFescape% PROCfinish:MODE7:END
260 IFquad%=1 orgx%=-8:orgy%=660 ELSE
orgx%=760:orgy%=20
270 plot%=FALSE:col%=0:xq%=orgx%:yq%=o
rgy%:MOVEqx%,yq%:PRINTCHR$128;
280 *FX15,0
290 PROCwait
300 REPEAT
310 IFFNescape escape%=TRUE
320 fl%=FALSE:ox%=xq%:oy%=yq%
330 IFFNleft xq%=xq%-editstep%:fl%=TRU
E
340 IFFNright xq%=xq%+editstep%:fl%=TR
UE
350 IFFNup yq%=yq%+16:fl%=TRUE
360 IFFNdown yq%=yq%-16:fl%=TRUE
370 temp%=FNgetcolour:IFtemp%<>-1 col%
=temp%:plot%=TRUE:fl%=TRUE
380 IFFNshift plot%=TRUE
390 IF(xq%-orgx%)<0 xq%=orgx% ELSEIF(x
q%-orgx%+editstep%)>512 xq%=(orgx%+512-e
ditstep%)
400 IF(yq%-orgy%)<0 yq%=orgy% ELSEIF (
yq%-orgy%)>368 yq%=(orgy%+368)
410 IF plot% GCOL0,col%:MOVEqx%,yq%:PR
INT;CHR$129;:PLOT69,(x%+4+(xq%-orgx%)/4)
,(y%-96+(yq%-orgy%)/4)
420 GCOL3,white%:IFFLXMOVEox%,oy%:PRIN
T;CHR$128;:MOVEqx%,yq%:PRINT;CHR$128;
430 plot%=FALSE
440 UNTILFNtab ORescape%
450 MOVEqx%,yq%:PRINT;CHR$128;:*FX15,0
460 IFescape% PROCfinish:MODE7:END
470 PROCwait
480 UNTILFALSE
490 END
500 DEFPROCwait
510 a%=TIME:REPEAT:UNTILTIME=a%+50
520 ENDPROC
530 DEFPROCfrontend
540 VDU22,7
550 FORA=1TO2:PRINTTAB(11,A)CHR$141;CH
R$131;"Pixel Editor":NEXT:PRINTCHR$134"V
ersion 1.4 - for any graphics mode"
560 VDU28,0,24,39,3
570 PRINT"CHR$134"Which mode (0,1,2,4
or 5) ?"
580 REPEAT
590 mode%=GET-48
600 UNTILmode%>=0ANDmode%<6ANDmode%<>3
610 CLS:PRINTTAB(8)CHR$134"Version 1.4
- mode ";mode%
620 PRINTTAB(0,2)CHR$131"Z"CHR$134"]le
ft"TAB(10)CHR$131"X"CHR$134"]right"TAB(2
0)CHR$131":CHR$134"]up"TAB(30)CHR$131"/
"CHR$134"]down"TAB(10)CHR$131"(or cursor
keys)"
630 PRINTCHR$131"TAB"CHR$134"]toggle m
agnify / edit mode."
640 PRINTCHR$131"SHIFT"CHR$134"]double
speed / last colour."
650 PRINTCHR$131"HEX characters"CHR$13
4"]select colour."
660 VDU26;28,0,24,39,10
670 REPEAT
680 REPEAT
690 PRINT"CHR$131"Enter filename to be
edited (or *<OS>)"
700 INPUTfile$
710 UNTILfile$<>""
720 IFLEFT$(file$,1)="" OSCLI(file$)
730 UNTILLEFT$(file$,1)<>"*"

```

```

740 PRINT"CHR$131"Enter the filename u
nderwhich the"CHR$131"edited screen is
to be saved"
750 REPEAT:INPUTfile2$:UNTILfile2$<>""
760 VDU22,mode%
770 OSCLI("LOAD "+file$)
780 ENDPROC
790 DEFPROCinitial
800 IFmode%>=0ANDmode%<4 OSCLI("LOAD 0
BJECT1") ELSE OSCLI("LOAD OBJECT2")
810 ?&8B=mode%
820 x%=572:y%=576:quad%=1
830 MemToScreen%=&900
840 IFmode%>2 ScreenToMem%=&92B:Magnif
y%=&965 ELSE ScreenToMem%=&929:Magnify%
=&961
850 VDU23;820;0;0;0;0;
860 escape%=FALSE
870 IFmode%=0 A=31:B=17:C=14:editstep%
=8:white%=1
880 IFmode%=10Rmode%=4 A=124:B=68:C=56
:editstep%=16:white%=3
890 IFmode%=20Rmode%=5 A=248:B=136:C=1
12:editstep%=32:white%=7
900 VDU23,128,0,A,B,0,B,A,0,0;23,129,0
,0,C,C,C,0,0,0
910 IFmode%=4 white%=1
920 IFmode%=5 white%=3
930 magstep%=16:IFmode%>2 magstep%=32
940 ENDPROC
950 DEFPROCerror
960 VDU22,7;7:REPORT:PRINT"Press Spac
e-Bar to continue.":REPEATUNTILGET=32
970 ENDPROC
980 DEFFNshift=INKEY(-1)
990 DEFFNleft=INKEY(-98)ORINKEY(-26)
1000 DEFFNright=INKEY(-67)ORINKEY(-122)
1010 DEFFNup=INKEY(-73)ORINKEY(-58)
1020 DEFFNdown=INKEY(-105)ORINKEY(-42)
1030 DEFFNtab=INKEY(-97)
1040 DEFFNescape=INKEY(-113)
1050 DEFFNgetcolour
1060 IFINKEY(-40)THEN=0
1070 IFINKEY(-49)THEN=1
1080 IFmode%=0Rmode%=4 ==-1
1090 IFINKEY(-50)THEN=2
1100 IFINKEY(-18)THEN=3
1110 IFmode%=10Rmode%=5 ==-1
1120 IFINKEY(-19)THEN=4
1130 IFINKEY(-20)THEN=5
1140 IFINKEY(-53)THEN=6
1150 IFINKEY(-37)THEN=7
1160 IFINKEY(-22)THEN=8
1170 IFINKEY(-39)THEN=9
1180 IFINKEY(-66)THEN=10
1190 IFINKEY(-101)THEN=11
1200 IFINKEY(-83)THEN=12
1210 IFINKEY(-51)THEN=13
1220 IFINKEY(-35)THEN=14
1230 IFINKEY(-68)THEN=15
1240 ==-1
1250 DEFPROCbox(x%,y%,m%)
1260 GCOL3,white%
1270 MOVEqx%,y%:DRAWx%+132,y%:DRAWx%+132
,y%-98:DRAWx%,y%-98:DRAWx%,y%
1280 IFm%<>1 ENDPROC
1290 IFmode%>2 memloc%=&5801+(320*(256-
y%/4)DIV8)+x%/4 ELSE memloc%=&3002+(640*
(256-y%/4)DIV8)+x%/2
1300 ?&84=memloc%MOD256:&85=memloc%DIV
256
1310 CALL Magnify%
1320 ENDPROC
1330 DEFPROCquad(m%)
1340 GCOL3,white%
1350 IFquad%=1 MOVE0,636:DRAW512,636:DR
AW512,1024:&80=&80:&81=830 ELSEMOVE764

```

```

,0:DRAW764,384:DRAW1280,384:&80=&80:&8
1=&63
1360 IFmode%>2ANDquad%=1 ?&81=&58 ELSEI
Fmode%>2 ?&80=&80:&81=&71
1370 IFm%=1 CALL MemToScreen%
1380 IFm%=2 CALL ScreenToMem%
1390 ENDPROC
1400 DEFPROCfinish
1410 PROCquad(1):PROCbox(x%,y%,2)
1420 *FX200,0
1430 *FX15,0
1440 IFmode%>2 AS="5800"ELSE AS="3000"
1450 OSCLI("SAVE "+file2$+AS+" 8000")
1460 ENDPROC

```



| | | |
|--------------|--------------|---------------|
| 10 = 00 | 500 = A180 5 | 990 = 39FC 7 |
| 20 = 00 | 510 = 2F44 A | 1000 = ED65 2 |
| 30 = 00 | 520 = ED0F 4 | 1010 = 2256 C |
| 40 = 7C44 4 | 530 = 10B 1 | 1020 = DAE1 1 |
| 50 = 2FD3 2 | 540 = 318E 0 | 1030 = EDE1 9 |
| 60 = 40B5 9 | 550 = 9C7 E | 1040 = AA2B 1 |
| 70 = 8B88 E | 560 = 7B51 C | 1050 = EFFF 0 |
| 80 = 2CA9 9 | 570 = B4E4 5 | 1060 = FA0A 0 |
| 90 = 3630 6 | 580 = BFBA B | 1070 = 4257 2 |
| 100 = BFBA D | 590 = 5C06 7 | 1080 = AA42 8 |
| 110 = BFBA C | 600 = 892E F | 1090 = 9FE8 8 |
| 120 = EBC8 3 | 610 = DCAB 2 | 1100 = 8B45 B |
| 130 = C4FE 1 | 620 = A5A5 E | 1110 = 4570 7 |
| 140 = FD63 2 | 630 = A7BC 2 | 1120 = 51F3 B |
| 150 = DC66 2 | 640 = 2A9C 8 | 1130 = 274E 3 |
| 160 = 2693 A | 650 = B112 B | 1140 = 31BE B |
| 170 = 2ECA B | 660 = E86C E | 1150 = 2578 C |
| 180 = FA41 5 | 670 = BFBA 2 | 1160 = B260 1 |
| 190 = E04D 3 | 680 = BFBA E | 1170 = B1E 5 |
| 200 = 980F F | 690 = 6540 6 | 1180 = AC35 2 |
| 210 = 10C3 5 | 700 = 86B5 3 | 1190 = DEE9 5 |
| 220 = 3022 A | 710 = 6093 1 | 1200 = FDFE 1 |
| 230 = 63DF C | 720 = 1336 6 | 1210 = 8C95 7 |
| 240 = 6985 3 | 730 = C507 1 | 1220 = 5BF6 0 |
| 250 = CA45 A | 740 = 7FA4 8 | 1230 = 7C33 E |
| 260 = 12C5 1 | 750 = A0A9 0 | 1240 = D13C C |
| 270 = 643F B | 760 = 6315 3 | 1250 = 826A 3 |
| 280 = 6C86 5 | 770 = 8D1C 6 | 1260 = 1772 B |
| 290 = 4877 F | 780 = ED0F 0 | 1270 = 333E D |
| 300 = BFBA 4 | 790 = C10F 7 | 1280 = 8832 2 |
| 310 = EBC8 A | 800 = 844A B | 1290 = 6D77 2 |
| 320 = FCBB 5 | 810 = F0B1 5 | 1300 = 9CDB 3 |
| 330 = 6AFF 5 | 820 = A276 3 | 1310 = 7971 A |
| 340 = F050 5 | 830 = DDB1 3 | 1320 = ED0F A |
| 350 = F5B0 C | 840 = 84C1 3 | 1330 = FF19 B |
| 360 = 2B2 9 | 850 = F716 0 | 1340 = 1772 8 |
| 370 = 86E2 A | 860 = E5D7 D | 1350 = 733F 4 |
| 380 = 46C7 C | 870 = A62E F | 1360 = D8CF 3 |
| 390 = 92 F | 880 = A9A9 8 | 1370 = 7A8E 1 |
| 400 = 7147 9 | 890 = D965 9 | 1380 = 9E3F 8 |
| 410 = 579A C | 900 = C33F A | 1390 = ED0F 9 |
| 420 = EFD8 2 | 910 = BB04 8 | 1400 = 275 0 |
| 430 = BF4D 2 | 920 = F4D3 B | 1410 = 6114 2 |
| 440 = 6985 F | 930 = 2B93 C | 1420 = 3FF2 F |
| 450 = F9E8 D | 940 = ED0F 1 | 1430 = 6C86 D |
| 460 = CA45 B | 950 = D7A7 D | 1440 = 611F 9 |
| 470 = 4B77 B | 960 = F074 E | 1450 = C183 6 |
| 480 = E014 F | 970 = ED0F 8 | 1460 = ED0F 5 |
| 490 = FD2E C | 980 = B847 C | |

This listing is included in this month's tape & disc offer. See order form on Page 149.



SOFTWARE

60 High Street Hanham Bristol BS15 3DR Telephone: (0272) 604130
24 Hour Answer Phone for all enquiries

BBC DISC

| TITLE | RRP | OUR PRICE | TITLE | RRP | OUR PRICE |
|---------------------------|-------|-----------|---------------------------|-------|-----------|
| Acornsoft Hits Vol 1 | 11.95 | 10.50 | Palace of Magic | 11.95 | 10.80 |
| Acornsoft Hits Vol 2 | 11.95 | 10.50 | Palace of Magic (Compact) | 14.95 | 12.50 |
| Big K.O. | 12.95 | 11.50 | Paperboy | 14.95 | 12.50 |
| Big K.O. (Compact) | 12.95 | 11.50 | Phantom | 12.95 | 10.50 |
| Cholo | 17.95 | 14.50 | Psycastris | 11.95 | 10.25 |
| Citadel | 11.90 | 10.50 | Quiz Quest | 9.95 | 7.50 |
| Code name Droid | 11.95 | 10.75 | Ravenskull | 11.95 | 10.50 |
| Code name Droid (Compact) | 14.95 | 12.50 | Repton 3 | 11.95 | 10.50 |
| Colossus Chess 4.0 | 14.95 | 12.95 | Repton 3 (Compact) | 14.95 | 12.75 |
| Commonwealth Games | 12.95 | 10.50 | Revs +4 Tracks | 14.95 | 12.50 |
| Commonwealth Games CM | 12.95 | 10.50 | Revs +4 Tracks (Compact) | 19.95 | 17.50 |
| Count with Oliver | 10.95 | 9.25 | Scrabble | 14.95 | 12.50 |
| Craze Rider | 11.95 | 10.50 | Sensnal | 14.95 | 12.50 |
| Double Phantom | 19.95 | 17.50 | Sink the Bismarck | 10.99 | 9.95 |
| DR. Who | 19.95 | 17.50 | Speech | 11.95 | 10.50 |
| Elite | 14.95 | 12.95 | Sphere of Destiny | 11.95 | 10.50 |
| Elite (Compact) | 19.95 | 17.50 | Starquake | 11.95 | 10.50 |
| Firetrack | 14.99 | 12.50 | Steve Davis Snooker | 12.95 | 10.75 |
| Fleet St. Editor 40/80 | 39.95 | 32.50 | Strike Force Harrier | 12.95 | 10.75 |
| Footballer of the Year | 14.95 | 12.50 | Strykers Run | 11.95 | 10.50 |
| Graham Gooch | 11.95 | 10.50 | Superior Col V1 Com | 14.95 | 12.50 |
| Grand Prix | 11.95 | 10.25 | Superior Col V2 Com | 14.95 | 12.50 |
| Grand Prix (Compact) | 14.95 | 12.50 | Superior Coll Vol 1 | 11.95 | 10.50 |
| Graphic Adv Creator | 27.95 | 24.00 | Superior Coll Vol 2 | 11.95 | 10.50 |
| Imogen | 9.95 | 7.75 | Supertest | 12.95 | 10.50 |
| Imogen (Compact) | 11.95 | 10.25 | Tanks | 12.95 | 10.50 |
| Impossible Mission | 12.99 | 10.50 | Tarzan | 12.95 | 10.50 |
| Ket Trilogy | 11.95 | 10.50 | The Quill | 22.95 | 19.50 |
| Magic Story Maker | 12.95 | 10.50 | Thunderstruck II | 11.95 | 9.99 |
| Mini Office 40/80 | 16.95 | 14.50 | Trivial Pursuits | 19.95 | 17.50 |
| Mini Office 80T Master | 19.95 | 17.50 | War | 14.95 | 12.50 |
| Mini Office Master Com | 21.95 | 18.75 | Winter Olympics | 12.95 | 10.50 |
| Monopoly | 14.95 | 12.50 | XOR | 12.95 | 12.50 |
| Olympic Decathlon | 9.95 | 7.50 | XOR Designer | 14.95 | 12.50 |

BBC CASSETTE

| TITLE | RRP | OUR PRICE | TITLE | RRP | OUR PRICE |
|---------------------------|-------|-----------|------------------------|-------|-----------|
| 1st Steps with Mr. Men | 8.95 | 7.25 | Micropower Magic | 7.95 | 6.25 |
| Acornsoft Hits 1 | 9.95 | 7.75 | Micropower Magic II | 7.95 | 6.25 |
| Acornsoft Hits 2 | 9.95 | 7.75 | Mini Office II | 14.95 | 12.50 |
| Arkanoid | 8.95 | 7.25 | Monopoly | 12.95 | 10.50 |
| Big K.O. | 7.95 | 6.50 | Mouse Trap | 7.95 | 6.25 |
| Citadel | 9.95 | 7.75 | Oxbridge | 7.95 | 6.25 |
| Code Name Droid | 9.95 | 7.75 | Palace of Magic | 9.95 | 7.65 |
| Colossus Chess 4.0 | 9.95 | 7.75 | Paperboy | 9.95 | 7.75 |
| Commonwealth Games | 7.95 | 6.25 | Phantom | 7.95 | 6.25 |
| Comp Hits 10 Vol 3 | 9.95 | 7.75 | Phantom Combat | 9.95 | 7.75 |
| Computer Hits 5 | 6.95 | 5.35 | Power Pack | 9.95 | 7.75 |
| Craze Rider | 9.95 | 7.75 | Psycastris | 7.95 | 6.25 |
| Dodgy Geezers | 8.95 | 7.25 | Ravenskull | 9.95 | 7.75 |
| Elite | 12.95 | 10.95 | Repton 3 | 9.95 | 7.75 |
| Exploding Fist | 9.95 | 7.50 | Rev + 4 Tracks | 12.95 | 10.50 |
| Firetrack | 9.95 | 7.50 | Round World 80 Screens | 7.99 | 6.75 |
| Five Star Games 2 | 9.95 | 7.50 | Scrabble | 12.95 | 10.50 |
| Five Star Games 1 | 9.95 | 7.50 | Sensnal | 9.95 | 7.75 |
| French on the Run | 9.95 | 7.75 | Speech | 9.95 | 7.75 |
| Future Shock | 7.95 | 6.25 | Sphere of Destiny | 7.95 | 6.75 |
| Galalorce | 9.95 | 7.50 | Soy V Spy | 9.95 | 7.75 |
| Goal | 7.95 | 6.25 | Star Clash | 4.99 | 4.25 |
| Graham Gooch | 9.95 | 7.75 | Starquake | 9.95 | 7.75 |
| Grand Prix | 9.95 | 7.75 | Steve Davis Snooker | 8.95 | 7.25 |
| Graphic Adventure Creator | 22.95 | 16.50 | Strike Force Harrier | 9.95 | 7.25 |
| Here and There Mr. Men | 7.95 | 6.25 | Strykers Run | 9.95 | 7.75 |
| Imogen | 8.95 | 7.25 | Supertest | 8.95 | 5.50 |
| Impossible Mission | 8.99 | 7.25 | Tarzan | 9.95 | 7.50 |
| Jet Set Willy | 7.95 | 6.25 | The Hobbit | 9.95 | 7.50 |
| Kayleth | 9.95 | 3.99 | The Quill | 16.95 | 14.50 |
| Ket Trilogy | 9.95 | 7.50 | Trivial Pursuits | 14.95 | 12.25 |
| Konam's coin ops | 9.95 | 7.50 | WAR | 8.95 | 7.25 |
| Last of the Free | 7.95 | 6.25 | Winter Wonderland | 7.95 | 6.25 |
| Magic Story Maker | 9.95 | 7.50 | Word Games | 9.95 | 7.75 |
| Master of Universe Adv | 9.99 | 3.99 | XOR | 9.95 | 7.75 |
| Mega Sports/Genesis | 8.95 | 7.25 | Yie Ar Kung Fu II | 8.95 | 7.25 |
| Micro Value Gold | 3.99 | 3.50 | | | |

All prices are inclusive of VAT and delivery inside the UK. Please make cheques P.O.'s payable to 'LIGHTSPEED SOFTWARE', all orders despatched within 24 hours, but allow 7 days.

AMSTRAD COMPUTERS

| | |
|-------------------------|-------|
| PC1512 S/D mono | £389 |
| PC1512 S/D colour | £539 |
| PC1512 D/D mono | £489 |
| PC1512 D/D colour | £659 |
| PC1512 20Meg mono | £825 |
| PC1512 20Meg colour | £975 |
| PC1640 S/D colour EGA | £749 |
| PC1640 D/D colour EGA | £849 |
| PC1640 20Meg colour EGA | £1129 |

EPSON COMPUTERS

| | |
|------------------------|-------|
| PC AX-20 AT 20Meg 640K | £1495 |
| PC AX-40 AT 40Meg 640K | £1895 |

OPUS COMPUTERS

| | |
|---------------------------------|----------------------|
| OPUS System 1 256K | |
| Single Floppy | £485 |
| OPUS System 2 1024K RAM | |
| Single Floppy | £579 |
| OPUS System 3 1024K RAM | |
| Twin Floppy | £675 |
| OPUS System 4 1024K RAM | |
| 20 Meg | £965 |
| Colour Monitor add | £200 |
| EGA version add | £300 to above prices |
| Educational Discounts Available | |

DOT MATRIX PRINTERS

| | |
|---------------------------|------|
| Amstrad DMP 3000 | £156 |
| Amstrad DMP 4000 | £295 |
| Citizen 120D | £165 |
| Canon PW1080A | £245 |
| Canon A55 | £395 |
| Epson LX800 | £225 |
| Panasonic KX-P1081 | £149 |
| Panasonic KX-P1082 | £245 |
| MP 135 80col 135cps | £145 |
| MP 165 80col 165cps | £175 |
| MP 201 200cps 132col | £295 |
| Panasonic KX-P1595 240cps | £515 |
| Panasonic KX-P1592 180cps | £415 |
| MP480 480cps 74nlq | £365 |

SPECIAL OFFERS

| | |
|----------------|------|
| Quendata 11-20 | £125 |
| Epson RX100+ | £325 |
| Ricoh 1600 | £595 |
| MT 160 | £350 |
| Brother 2024L | £595 |

Prices are CASH WITH ORDER and Exclude Delivery and VAT
All Goods Covered by Manufacturers Warranty
EXPORT ORDERS WELCOMED
Monday-Friday 10.00am-6.00pm

DAISYWHEEL PRINTERS

| | |
|----------------------|-------|
| Juki 6100 | £255 |
| Juki 6200 | £395 |
| Juki 6300 | £635 |
| Juki 6500 | £899 |
| Panasonic KX-P3131 | £245 |
| Panasonic KX-P3151 | £475 |
| Qume Letterpro 12/20 | £369 |
| Qume Sprint 11/90 | £1195 |
| MP26 | £215 |
| MP40 | £315 |

LASER PRINTERS

| | |
|------------------------|--------|
| Canon LBP-8A1 | |
| Canon Mk II | Call |
| HP Laser Jet | for |
| HP Laser Jet Series II | latest |
| QMS K8 | Prices |
| Epson GQ3500 | |

DISCOUNTED SOFTWARE

| | |
|----------------|--------|
| Wordstar 1512 | £49.00 |
| Firstword Plus | £55.00 |
| Sidekick | £22.00 |
| Supercalc 3.1 | £49.00 |
| Reflex | £49.00 |

Extensive List Available.
Please call for prices

CONSUMABLES

A Wide range of ribbons, Print Wheels, Listing Paper, Diskettes. Call for prices.

01-739 5607



1-4 Christina Street
London EC2A 4PA

TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE
17 Burnley Road, London NW10 1ED Tel: 01-208 1177
305 Edgware Road, London W2 Tel: 01-723 0233

ARCHIMEDES

300 SERIES

| | |
|-----------------------|-------------|
| Archimedes 305 Basic | £799 (a) |
| Archimedes 305 Mono | £849 (2×a) |
| Archimedes 305 Colour | £999 (2×a) |
| Archimedes 310 Basic | £875 (a) |
| Archimedes 310 Mono | £925 (2×a) |
| Archimedes 310 Colour | £1075 (2×a) |


400 SERIES

| | |
|-----------------------|-------------|
| Archimedes 440 Basic | £2299 (a) |
| Archimedes 440 Mono | £2349 (2xa) |
| Archimedes 440 Colour | £2499 (2xa) |

ADD-ONS

| | |
|-------------------------------|----------|
| 0.5Mb Ram upgrade kit for 305 | £79 (c) |
| 2nd Floppy Drive | £125 (b) |
| Podule Backplane | £39 (c) |
| 20 Mb Hard Disc + Podule | £499 (a) |

(Please enquire about the availability of some of the above packages)

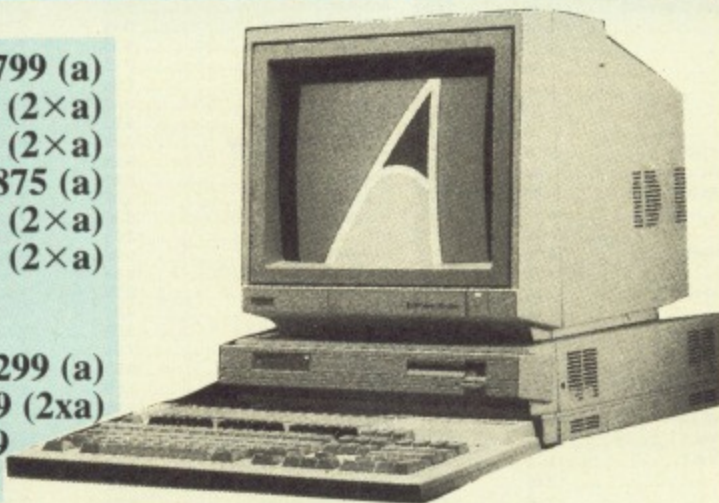

SOFTWARE

| | | | |
|------------|---------|-----------------------|------------|
| ANSI C | £99 (e) | Archimedes Ref Manual | |
| ISO Pascal | £99 (c) | ARM Ass Lang Prog | |
| Fortran 77 | £99 (c) | Professional | £12.95 (d) |
| Logistix | £99 (c) | | |
| View | | | |

BBC MASTER COMPACT

All Compact Systems include a FREE educational/fun software bundle made up from BBC Publications software range.

SYSTEM 1

128K, Single 640K Drive & bundled software. £309 (a)

SYSTEM 2

System 1 with a 12" Hi Res Monochrome Monitor. £359 (a)

SYSTEM 3

System 1 with a 14" Med Res RGB Monitor. £479 (a)

Second Drive Kit. £91 (c)

Serial Kit. £25 (c)

T.V. Modulator. £26 (d)

Extension cable for external 5.25" 80T Drive. £12.50 (d)

Mertec Adaptor (Upgrades to almost master level) £35 (c)

FILE STORE

Acorn's new file server system

Filestore E01 £828 (a)

Filestore E20 £710 (a)

Full details on request

Acorn 30Mb Winchester (incl FS III Software) £1530 (a)

ECONET ACCESSORIES

Econet Starter Kit £85 (b) Econet Bridge £174 (b)

Econet Socket Set £29 (c) Printer Server Rom £41 (d)

File Server Level II £75 (b) 10 Station Lead Set £26 (d)

Master FS Utility Disc £17.25 (d)

UPGRADE KITS

1.2 OS ROM £15 (d) ADFS ROM £26 (d)

DNFS ROM £19 (d) 1770 DFS Kit £43.50 (d)

BASIC II ROM £22.50 (d) Econet Kit £55 (d)

SECOND PROCESSORS

Universal 2nd Processor Adaptor £75 (b)

Acorn 65C02 Turbo £92 (b)

TORCH ZEP100 £229 (a)

MULTIFORM Z80

TECHNOMATICs multi format Z80 system includes a FREE Pocket Wordstar + MS/DOS Read/Write Utility £249 (b)

ACW/CO-PROCESSOR

For full specification see page 5

32016 Co-processor £949 (a)

Cambridge Workstation £3450 (a)

X25 Gateway £2175 (b)

10 MHz upgrade for Co-Proc £255 (a)

ACORN IEEE INTERFACE

Allows BBC computer to control any scientific and technical equipment that conforms to the IEEE488 standard. The interface can link upto 14 compatible devices. Typical applications are in experimental work in academic and industrial labs. £265 (a)

EPROMS/RAMS

2764-25 £2.80 (d)

27128-25 £3.60 (d)

6264LP-15 £2.60 (d)

27256 £5.00 (d)

27512 £9.90 (d)

RAM/ROM EXPANSION

ATPL Board for Model B. Simple to instal, no soldering. Allows expansion to 15 Roms + 2 8K Rams £37 (c)

ATPL Battery backup kit £18 (d)

ATPL Board for BBC + £31 (c)

BBC MASTER SERIES

AMB15 MASTER £34

Master AMB15 includes a free educational/fun software bundle made up from BBC Publications software range

AMB12 MASTER ET £31

AMCO6 Turbo 65C02 Module £9

ADC08 512 Processor £19

ADF14 ROM Cartridge £13(d) ADJ22 Ref Manual I

ADF10 Econet Module £41(c)

ADJ23 Ref Manual II £14(c) ADJ24 Adv

Ref Manual £11

BBC Master View User Guide £8

Dust Cover £4.75(d) Viewsheet User Guide £8

MASTER ROM/RAM CARTRIDGE

TRC1 Two rom cartridge £8.95

TRC4 Four rom cartridge £11.95

TRC 32K Cartridge inc RAM £29.95

LEARN ARABIC WITH YOUR COMPUTER

ساعد تعليم العربية

Convert your BBC or Master computer to bilingual operation with the BABEL Arabic Package. Beautiful Arabic text. Software developed and tested in the classroom for 2 years to help the young read and understand Arabic.

The package comprises: an easy to install EPROM, a set of keycap labels, an instruction booklet and a disc with absorbing program. Mastering the Arabic alphabet, Arabic grammar exercises, English to Arabic and Arabic to English translation exercises.

The BABEL Arabic Package £70

Other Arabic educational software for the converted micro; each disc £15


(Please specify 40 or 80 tracks). Send for details.

Master Operating System (book by David Atherton)

£12.95

PRINTER STAND

A new style printer stand with easy paper feed and paper separation, provides complete access to paper. Can be used with both top and bottom paper feed. Very space efficient. £26

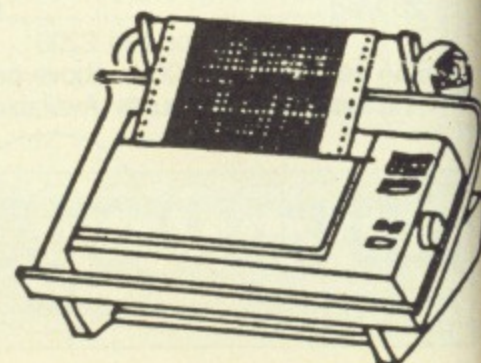

TECHNOLINE
24 hr viewdata system)
Tel:01-450 9764

MAIL ORDER
7 Burnley Road
London NW10 1ED
Telex:922800

RETAIL SHOPS
15 Burnley Road, London NW10 1ED
Tel:01-208 1177 Telex:922800
(close to Dollis Hill ⊕)
West End Branch
305 Edgware Road, London W2
Tel:01-723 0233
(near Edgware Road ⊕)

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card



Orders welcome from
government depts &
educational establishments

All prices ex VAT.
Prices are subject to
change without notice
Please add carriage
(a) £8.00 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00

TECHNOMATIC DISC DRIVES



TS 400



PD 800P

A range of high quality high performance drives to meet the needs of all BBC Micro Users.

All drives fitted with high quality, slim line Japanese drive mechanism and necessary cables.

*All drives are fitted with high quality slim line ultra low power mechanisms capable of single and double density operation and offering fast track access and head setting times. Our confidence in their quality enables us to offer a two year warranty on these mechanisms without any extra charge.

*5.25" floppy drives are fitted with 40/80 track switches as standard at no extra cost. The switches are located in the front and clearly marked to indicate the status at a glance.

*The mechanisms are set inside attractively styled, sturdy metal casings painted in BBC beige colour.

*All drives fitted with all necessary leads and are ready for operation on unpacking. The drives with the mains power supply are supplied with a mains lead fitted with suitably fused 13A moulded plug.

5.25" Single Drives 40/80 switchable:

TS400 400K/640K £105 (b)

PS400 400K/640K with integral mains power supply £115 (b)

5.25" Dual Drives 40/80 switchable:
TD800 800K/1280K £185 (a)

PD800 800K/1280K with integral mains power supply £209 (a)

PD800P 800K/1280K with integral mains power supply and monitor stand £229 (a)

3.5" 80T DS Drives:
TS351 single 400K/640K £75 (b)

PS351 single 400K/640K with integral mains power supply £99 (b)

TD352 Dual 800K/1280K £134 (b)

PD352 Dual 800K/1280K with integral mains power supply £169 (b)

PD853 Combo Dual 5.25"/3.5" drive with psu. £209 (a)

DISC DRIVE MULTIPLEXER (Suitable for DFS & ADFS)

TDM2 Dual Unit: 2 computers/one drive unit £69 (b)

TDM4 Quad Unit: 4 computers/one drive unit £119 (b)

TECHNOMATIC WINCHESTERS

Technomatic offer the most popular range of Winchester Drives for BBC Micro Systems at competitive prices.

All Winchesters are supplied with:

1. ADFS Roms
2. Front End Utility for the Master. This utility enables the total contents of the drive displayed in icon format indicating the type of data in each file. Any file can be loaded by pointing the cursor at it.

P20HD TECHNOMATIC 20 Mbyte Winchester Drive £499 (a)

P40HD TECHNOMATIC 40 Mbyte Winchester Drive with Acorn ADFS ROM £749 (a)

P204HP TECHNOMATIC 20 Mbyte Winchester and a 80T DS floppy Drive built in a monitor stand. Includes ADFS Rom. £769 (a)

P2041HT As P204HP but also with a 10 Mbyte tape streamer backup unit and backup utilities. Includes ADFS Rom. £1295 (a)

TS10 10 Mbyte Tape Streamer Backup unit with utilities. £599 (a)

TFC10 10 Mbyte Pre-formatted Cartridge for use with P2041HT and TS10. £19 (d)

Special adaptor for S.J. File Server £28 (d)

Enquire for larger capacity Winchesters.

These Winchesters are compatible with the S.J. File Server.

WINCHESTER Drive Multiplexer
TWM2 for two computers. £99 (b)
TWM4 for four Computers. £159 (b)

3M FLOPPY DISCS

New low prices plus Winter Olympic Competition

Thousands of instant prizes to be won with 3M Discs. A draw for a trip to the Winter Olympics. Five 2nd prizes of £1,000 of recording equipment.

| | |
|----------------------------|---------------------------|
| 5.25" Discs in packs of 10 | 3.5" Discs in packs of 10 |
| 744 40T SS DD £8.50 (d) | 80T SS DD £15 (d) |
| 745 40T DS DD £10.50 (d) | 80T DS DD £19.50 (d) |
| 746 80T SS DD £11.50 (d) | |
| 747 80T DS DD £13.25 (d) | |

(Add £1 for library case packing)



BULK DISCS

50 5.25" 40 T single sided discs with sleeves in lockable box. £25 (b)

50 5.25" 80 T double sided discs with sleeves in lockable box. £36 (b)

50 3.5" 80 T double sided discs with sleeves in lockable box. £60 (b)

FLOPPICLENE DRIVE HEAD CLEANING KIT

5.25" Kit with 20 disposable discs £12.50 (d)

3.5" Kit with 20 disposable discs £14.00 (d)

DISC STORAGE BOXES

DB340 Lockable 40 x 3.5" £8.50 (c)

DB550 Lockable 50 x 5.25" £6.50 (c)

DB570 Lockable 70 x 5.25" £8.50 (c)

DB5100 Lockable 100 x 5.25" £10.50 (c)

TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE
17 Burnley Road, London NW10 1ED Tel: 01-208 1177
305 Edgware Road, London W2 Tel: 01-723 0233

PRINTERS

EPSON LX800

150 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface and tractor feed as standard

£189 (a)

EPSON FX800

An enhanced version of FX85. Call for details.

£315 (a)

EPSON FX1000

An enhanced version of FX105. Call for details.

£439 (a)

EPSON EX800

£409 (a)

EPSON EX1000

£595 (a)

Colour option for EX800/EX1000.

£59 (b)

EPSON LQ800

£399 (a)

EPSON LQ1000

As LQ800 but wider carriage for 136 columns.

£609 (a)

TAXAN KP815

Enhanced KP810 with 160cps and full IBM compatibility.

£269 (a)

TAXAN KP915

Enhanced KP910 with 180cps and full IBM compatibility.

£369 (a)

NATIONAL PANASONIC KX P1081

£149 (a)

STAR NL 10 (Parallel Interface)

£190 (a)

STAR NL 10 (Serial Interface)

£219 (a)

INTEGREX Multicolour Inkjet printer.

Ideally suited for high res colour VDU screen dumps. Quietness & consistent output are major characteristics. BBC Screen dump for Integrex.

£549 (a)

£15 (d)

BROTHER HR20

8K buffer standard expandable to 16K. Parallel & Serial ports as standard.

£349 (a)

NAT PANASONIC KX P3131

Daisy wheel printer with 38K buffer, 17 cps, bi-directional, parallel interface

£249 (a)

JUKI 6100 Daisy wheel printer

15 cps, 2K buffer, switchable 10/12/15 cpi proportional spacing, underlining. Parallel interface.

£295 (a)

Parallel Printer Lead (1.2m)

£6 (d)

MODEMS

All modems listed below will be supplied with BBC Publications ModemMaster comms package and a BBC data lead.

MIRACLE WS4000 V21/23

£135 (b)

MIRACLE WS3000 V21/23

£244 (b)

MIRACLE WS3000 V22

£409 (b)

MIRACLE WS3000 V22 bis

£537 (b)

(All modems are BAPT approved)

BBC Data Cable for WS3000/4000

£7 (d)

MIRACLE WS2000V21/23 & BELL stds

£92 (c)

WS2000 Auto Dial Card

£27 (d)

WS2000 Auto Answer Card

£27 (d)

WS2000 SK1 Kit

£5 (d)

WS2000 User Port Lead

£5 (d)

TIME WARP

Real Time Clock. Plugs into the user port, battery back up as standard, includes manual, demo software including a diary/planner application program

£29 (d)

PLOTTERS

HITACHI 672

£465 (a)

LINEAR GRAPHICS

A4S PLOTMATE

£282 (a)

A4SM PLOTMATE

£342 (a)

A3 PLOTMATE

£299 (a)

A3M PLOTMATE

£431 (a)

Full range of accessories available for plotmate plotters

PRINTER SHARERS & BUFFERS

BUFFALO PB Buffer

Parallel buffer for internal fitting to most Epson printers. Simple to instal. PB128 (128K)

£89 (c)

PERIPHERAL & COMPUTER SHARERS

High quality switches to allow the user to switch between computers, printers, modems etc. Fully shielded metal cases, all lines fully switched.

| | Parallel | Serial |
|---------------------------------------|----------------|--------|
| 2 Computers to 1 Printer 36v36-2 | £25(c) 25v25-2 | £25(c) |
| 3 Computers to 1 Printer 36v36-3 | £39(c) 25v25-3 | £39(c) |
| 4 Computers to 1 Printer 36v36-4 | £45(c) 25v25-4 | £45(c) |
| 2 Computers 2 Printers X-over 36v36-x | £49(c) 25v25-x | £49(c) |
| BBC Cable set 3 to 1 (1m ea) | £24(c) | |
| BBC Cable set 4 to 1 (1m ea) | £30(c) | |

BBC Computer Sharer: TCS26

1 computer to 2 printers fitted with BBC cable

£17 (c)

Paper & Labels

Plain fanfold paper with microperforation:

| | |
|---------------------------|----------------|
| 2000 sheets 9 1/2" x 11" | £12 (£3.50) |
| 2000 sheets 14 1/2" x 11" | £18.50 (£4.50) |
| 1500 sheets A4 90gsm | £18.00 (£4.00) |

Labels/1000

Single Row 3 1/2" x 1 7/16" £5 (d)
Triple Row 2 7/16" x 1 7/16" £5 (d)

PROGRAMMING ACCESSORIES/SOFTWARE

Compatible with B, B+ and Master

EpromRyter (Epromer II)

Eprom Ryter is compatible with BBC Master only. See page 7.

£119 (b)

Upgrade of Epromer II to Eprom Ryter (Please return your Epromer II)

£49 (b)

EPROMER II

£89 (b)

MPROMER

£49 (c)

META ASSEMBLER

£145 (b)

PORTAL EPROM EMULATOR 512K

£245(b)

TEAM Disassembler

£145 (b)

EPROM ERASERS

UVIB 6 eproms, safety cutout £47 (b)

UVIT 6 eproms, timer, safety cutout £59 (b)

MONITORS

BBC lead incl with all monitors

MICROVITEC 14" RGB Monitors

Please specify plastic or metal case.

Microvitec 1431

Standard Resolution 453 pixels

£179 (a)

Microvitec 1431AP

As 1431 + composite video and sound input

£199 (a)

Microvitec 1451

Medium Resolution 653 pixels

£225 (a)

Microvitec 1451AP

As 1451 + composite video and sound input

£255 (a)

Microvitec 1441

High Resolution 895 pixels

£359 (a)

Philips 14" RGB

Med Res, high contrast screen, TTL/Linear Input, Mono/Colour Switch Sound Input. Seperate controls for brilliance and contrast.

£195 (a)

Microvitec 20" RGB/PAL/ Audio Monitors

Microvitec 2030CS

Standard Resolution RGB/Comp Video

£380 (a)

Microvitec 2040CS

High Resolution RGB/Comp Video

£685 (a)

TOUCHTEC-501

Brings genuine touch screen operation on metal cased Microvitec monitors, incl utilities disc with starter and development programs

£239 (b)

TAXAN SUPER VISION 620

12" Hi Res/Hi Contrast
Option to switch to green/amber
BBC/IBM Compatible

£269 (a)

TAXAN SUPER VISION 625

12" Super Hi Res and contrast RGB Monitor with option to switch to mono
BBC/IBM compatible.

£319 (a)

12" MONOCHROME MONITORS

TAXAN KX 117

Hi Res green etched screen

£85 (a)

TAXAN KX 118

Hi Res Long Persistence (P39)

£90 (a)

TAXAN KX 119

Hi Res amber etched screen

£90 (a)

PHILIPS BM 7502

Hi Res green screen.

£69 (a)

PHILIPS BM7522

Hi Res amber screen.

£75 (a)

PHILIPS BM 7542

Hi Res White screen.

£79 (a)

MONITOR ACCESSORIES

Microvitec Swivel Base (14" plastic monitors)

£17 (c)

Philips Swivel Base

£10 (c)

Monitor Stand Models B & B+

£10 (c)

Monitor Stand Master

£13 (c)

Double Tier stand Models B, B+ or Master

£24 (b)

Taxan RGB Lead

£5 (d)

Microvitec Lead

£3.50 (d)

Monochrome BNC/Phono Lead

£3.50 (d)

TECHNOLOGY
24 hr viewdata system)
Tel:01-450 9764

MAIL ORDER
7 Burnley Road
London NW10 1ED
Telex:922800

RETAIL SHOPS
15 Burnley Road, London NW10 1ED
Tel:01-208 1177 Telex:922800
(close to Dollis Hill ⊕)
West End Branch
305 Edgware Road, London W2
Tel:01-723 0233
(near Edgware Road ⊕)

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card



Orders welcome from
government depts &
educational establishments

All prices ex VAT.
Prices are subject to
change without notice
Please add carriage
(a) £8.00 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00

CAD/DRAWING PACKAGES

| | |
|--|------------|
| NOVACAD Cad Package for B, B & MASTER. (See page 5 for specification) | |
| Tracker Ball/Mouse Version (TM) | £49 (d) |
| TM Version plus Tracker Ball | £94 (d) |
| TM Version plus Mouse | £79 (d) |
| Plotter Driver Generator | £15 (d) |
| MOUSE | |
| AMX MOUSE with SUPER ART (pse specify B, B+ or Master) | £63 (d) |
| PAGEMAKER | £32 (d) |
| EXTRA/EXTRA (utility for the Pagemaker) | £19 (d) |
| MAX | £17 (d) |
| STAND ALONE MOUSE (includes horizontal scroll lock) | £34 (c) |
| RB2 TRACKER BALL RB2 Tracker Ball with Icon Master (for B, B+ & Master) | £59 (c) |
| RB2 Tracker Ball with Cursor Control Rom (for Master only) | £59 (c) |
| RB2 Tracker Ball 'Stand Alone' for use with NOVACAD & other software) | £47 (c) |
| Cursor Control Rom for Master | £12.50 (d) |
| MIRRORSOFT FLEET STREET EDITOR | £35 (d) |

CP/M SOFTWARE

Send for details on our full range of
CP/M & PC DOS packages for
Business, Communications & High
Level Languages.

Please send for details on our range of CP/M
software for Acorn/Torch Z80 2nd Processors

BBC SOFT/FIRMWARE

All software supplied by us is known to
operate with the appropriate Acorn Disc
filing systems. We cannot comment on
their use with other DFS systems.

DATABASE MANAGEMENT SYSTEMS

| | |
|--|---------|
| VIEWSTORE | £37 (d) |
| STARdataBASE | £39 (d) |
| MASTERFILE II | £17 (d) |
| ACORN OVERVIEW PACKAGE Special Offer (RRP £86) | £57 (b) |
| WORD PROCESSORS | |
| ACORN VIEW PROFESSIONAL (BBC) | £85 (c) |
| VIEW 2.1 | £35 (d) |
| VIEW 3.0 | £48 (c) |
| VIEW INDEX | £12 (d) |
| VIEW PRINTER DRIVER GENERATOR | £7 (d) |
| VIEWSPELL | £29 (d) |
| DOT PRINT PLUS | £28 (d) |
| WORDWISE | £24 (d) |
| WORDWISE PLUS | £38 (d) |
| WYSIWYG PLUS | £21 (d) |
| SPELLMASTER | £47 (d) |

| | |
|------------------|---------|
| INTERWORD | £39 (d) |
| WORDEASE | £24 (d) |
| SPELLCHECK III | £31 (d) |
| EDWORD II | £43 (c) |

| | |
|---------------------|---------|
| SPREADSHEETS | |
| VIEWSHEET | £37 (d) |
| WINDOWMATIC | £15 (d) |
| VIEWPLOT | £22 (d) |
| INTERSHEET | £37 (d) |
| INTERCHART | £26 (d) |
| ULTRACALC | £26 (d) |

| | |
|--|-------------------------------------|
| MINI OFFICE II DISC Version For B & B+ 40T or 80T For Master 80T For Compact | £14.75 (d) £17.30 (d) £19 (d) |
| MINI OFFICE II ROM Version For Master, Compact, B+ & B | £48 (c) |

| | |
|--|----------|
| LANGUAGES | |
| META ASSEMBLER | £145 (b) |
| TEAM DISASSEMBLER | £145 (b) |
| MACROM | £33 (d) |
| ACORN MICRO PROLOG | £62 (d) |
| ISO-PASCAL | £51 (c) |
| ISO-PASCAL STAND ALONE GENERATOR | £30 (d) |
| OXFORD PASCAL (40 or 80T) Specify B or B+ | £36 (d) |
| OXFORD PASCAL for Master | £52 (d) |
| ACORN LOGO | £46 (c) |
| LOGOTRON LOGO | £55 (c) |
| BBC PUBLICATIONS OPEN LOGO | £59 (c) |
| ACORN LISP ROM | £39 (d) |
| ACORN FORTH ROM | £39 (d) |
| ACORN COMAL ROM | £39 (d) |
| MICROTEXT | £52 (c) |
| MICROTEXT PLUS | £229 (b) |

| | |
|-----------------------|------------|
| COMMUNICATIONS | |
| TERMULATOR | £25 (d) |
| COMMSTAR II | £28 (d) |
| COMMUNICATOR | £49 (d) |
| MODEM MASTER | £11 (d) |
| COMMAND | £34 (d) |
| MASTER TERMULATOR | £34.75 (d) |

| | |
|---|---------------------|
| UTILITIES | |
| ACCELERATOR | £49 (d) |
| ACORN BASIC EDITOR | £24 (d) |
| MONITOR (BBC Pub) | £19 (d) |
| BROM PLUS | £26.50 (d) |
| SLEUTH | £23 (d) |
| TOOLKIT PLUS | £31 (d) |
| TOOLBOX 2 (BBC Pub) Manual Cassette | £9.50 (d) £9 (d) |
| ACORN GXR GRAPHICS ROM specify B or B+ | £24 (d) |
| PRINTMASTER | £24 (d) |
| PRINTWISE | £24 (d) |
| DUMPMASTER | £26 (d) |
| FONTWISE PLUS | £17 (d) |
| HERSHEY FONT CHARACTER GENERATOR | £18 (d) |
| ICON MASTER | £29 (d) |
| MOVIE MAKER | £26 (d) |
| Two Roms + Cassette | £26 (d) |
| ADV TELETEXT UTILITIES ROM | £7.95 (d) |

| | |
|--------------------------------------|------------|
| COMPACT (all on 3 1/2" disc) | |
| ARTROOM | £27 (d) |
| FONTWISE + | £22 (d) |
| FONT EDITOR | £22 (d) |
| RAMROD | £37 (d) |
| BROM PLUS | £32 (d) |
| MACROM | £37 (d) |
| BETABASE | £27 (d) |
| WHITE KNIGHT MKII | £16 (d) |
| BBC PUBLICATIONS BUNDLED SOFTWARE | £18.50 (d) |

BBC PUBLICATIONS EDUCATIONAL SOFTWARE

A series of programs developed in many cases along-
side Radio & TV programmes by BBC's Education
Department which supplement the classroom studies
by moving and colourful displays helping in clear
understanding of a variety of subjects. Some packages
also include audio cassettes.

PRIMARY EDUCATION

| | |
|-------------------------------|-----------|
| ASTRONOMY | £11 (d) |
| COMPUTERS AT WORK Aud/EC/disc | £16 (c) |
| PICTURE CRAFT Disc | £17 (d) |
| INTRODUCING GEOGRAPHY Disc | £16 (d) |
| MATHS WITH A STORY 1 Cass | £8 (d) |
| MATHS WITH A STORY 2 Cass | £8 (d) |
| NUMBER GAMES Cass/EC | £7.50 (d) |
| USING YOUR COMPUTER Cass | £24 (c) |

SECONDARY LEARNING

| | |
|--|------------|
| TECHNOLOGY & DESIGN Pt1 | £21.50 (c) |
| ELECTRIC FIELDS | £10.50 (d) |
| ADVANCED LEVEL | |
| STUDIES: STATISTICS Disc | £23 (d) |
| ADVANCED STUDIES: GEOGRAPHY Cass | £10 (d) |
| INSIDE INFORMATION Prog Cass | £10 (d) |
| Book | £8 (d) |
| Audio Cass | £5 (d) |
| SCIENCE TOPICS (ST) | |
| S.T.:WAVES Disc | £14 (d) |
| S.T.:RELATIONSHIPS Disc | £14 (d) |
| S.T.:BONDING Disc | £14 (d) |
| S.T.:ELECTROMAGNETIC SPECTRUM Disc | £14 (d) |
| S.T.:ELECTRONICS IN ACTION Disc | £14 (d) |
| S.T.:NEWTON & THE SHUTTLE Disc | £19 (d) |
| S.T.:ECOLOGY Disc/EC | £19 (d) |
| S.T.:POLYMERS Disc/EC | £19 (d) |
| S.T.:CLASSIFICATION & PERIODIC TABLE Disc | £20 (d) |
| S.T.:FOOD & POPULATION Disc | £20 (d) |
| SEC.SCIENCE MICROTECHNOLOGY Cass | £7 (d) |
| SEC.SCIENCE:THE MOLE CONCEPT Disc/Aud/EC | £16 (c) |
| GENERAL | |
| VU-TYPE PROFESSIONAL Disc | £19 (d) |
| WHITE KNIGHT MK II (for compact) Disc | £16 (d) |
| BATTLEFIELDS Cass | £8.50 (d) |
| A VOUS LA FRANCE Cass/EC | £17 (d) |
| Book | £5.25 (d) |
| Audio Cassettes (2) | £7.50 (a) |
| Additional charges for discs | £9.00 (d) |
| DEUTSCH DIREKT Disc/aud/EC | £16 (c) |
| Book | £5.95 (d) |
| MODEM MASTER | £11 (d) |

Cassette based programs listed above can be supplied
on disc at an extra charge of £1.50 per disc and please
specify the format required 40 or 80T.

TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE
17 Burnley Road, London NW10 1ED Tel: 01-208 1177
305 Edgware Road, London W2 Tel: 01-723 0233

TECH (24 hr
Tel: 01
MAIL
17 Bu
Lond
Telex

BOOKS

No VAT Carriage Code (c)

| | |
|-----------------------------------|--------|
| LANGUAGES | |
| 6502 Assy Lang Prog..... | £19.95 |
| 6502 Programming..... | £13.95 |
| 8086 Book..... | £23.95 |
| Acorn BCPI User Guide..... | £15.00 |
| Acorn FORTH..... | £7.50 |
| Acorn LISP..... | £7.50 |
| Acorn ISO Pascal Ref Manual..... | £10.00 |
| Intro to COMAL..... | £10.00 |
| Intro to LOGO..... | £7.50 |
| Micro Prolog Ref Manual..... | £10.00 |
| Introduction to Turbo Pascal..... | £14.95 |
| Prog the Micro with Pascal..... | £8.50 |
| The Supervisor's BBC Micro..... | £10.95 |

BBC MICRO GUIDE BOOKS

| | |
|---------------------------------|--------|
| Inside Information..... | £8.95 |
| Maths Prog in BBC Basic..... | £7.95 |
| The Friendly Computer Book..... | £4.50 |
| Toolbox 2..... | £10.95 |

PROGRAMMING/UTILITY

| | |
|--|--------|
| Advanced Sideways Ram User Guide..... | £9.95 |
| Advanced User Guide (BBC)..... | £15.95 |
| Applied Assembly Language on the BBC..... | £9.95 |
| BBC Micro Advance Programming..... | £9.95 |
| BBC Micro Ref Guide (B Smith)..... | £10.95 |
| BBC Micro Sideways ROM's RAM's..... | £9.95 |
| Guide to the BBC Rom..... | £9.95 |
| Beginners Guide to W.P..... | £7.95 |
| Mastering Assembly Code..... | £8.95 |
| Mastering Interpreters & Compilers..... | £14.95 |
| Mastering View, Viewsheet & Viewstore..... | £12.95 |
| View by B. Smith..... | £12.95 |
| View 3.0 User Guide..... | £9.00 |
| Viewstore User Guide..... | £9.00 |
| Viewsheet User Guide..... | £9.00 |
| Wordwise Plus..... | £9.95 |

SOUND & GRAPHICS

| | |
|---|-------|
| Computer Graphics & CAD Fundamentals..... | £9.95 |
| Mastering Music..... | £6.95 |

DISC DRIVE SYSTEMS

| | |
|-------------------------------------|--------|
| Advanced Disc User Guide..... | £16.95 |
| Disc Book..... | £3.50 |
| Disc Programming Techniques..... | £7.95 |
| Disc Systems..... | £6.95 |
| File Handling on the BBC..... | £6.95 |
| Discovering Disc Drives..... | £POA |
| Practical Disc File Techniques..... | £5.95 |
| Mastering the Disc Drive..... | £12.95 |
| Mastering DOS plus..... | £12.95 |

APPLICATIONS

| | |
|-------------------------------|-------|
| Interfacing Proj for BBC..... | £6.95 |
| BBC and Small Business..... | £5.75 |
| The Software Business..... | £5.50 |

Mastering Operating System

(David Atherton)£12.95

WYSIWYG PLUS

WYSIWYG PLUS is a printer and screen utility for Wordwise Plus, View, Interword, and Basic users, supplied on a 16K Eprom. To obtain a particular printer effect, such as enlarged text, it used to be necessary to discover the appropriate 'printer control code' from your manual and incorporate it into your text. Secondly, you had to print several trial copies in order to position the effect correctly in relation to the rest of your text.

WYSIWYG PLUS simplifies this trial and error approach using easily remembered *commands. For example, *ENLARGED not only selects enlarged text on your printer, but

WYSIWYG PLUS is designed to work with the following systems:

| | |
|----------------|------------------------------|
| BBC Model B | 6502 Second processor, |
| BBC Model B + | Turbo coprocessor |
| BBC Master 128 | All printers (Except lasers) |
| BBC Compact | |

uniquely shows you double width characters on your screen, even from within Wordwise Plus!

WYSIWYG PLUS incorporates a logo editor. Just draw your design on screen using the arrow keys, and save the results. Use the *GRAPHICS command to incorporate your design anywhere in your text; position and see your design in your text before faithfully reproducing a hard copy.

There is also special help for daisy wheel users. The *WHEEL command will prompt you to change daisy wheels whenever a change in type style is about to occur.

WYSIWYG PLUS workspace is relocatable.

WINDOWMATIC

All users of Acorn's VIEWSHEET spreadsheet program will be aware of its powerful windowing facility which allows the screen and/or printer to be configured in up to 10 separate windows taken from anywhere in the sheet. They will also be painfully aware of how difficult and time consuming it is to set up a required display. Although VIEWSHEET allows configurations to be saved to the media, it does not have provision for deciphering them.

WINDOWMATIC has been produced with the intention of rectifying these shortcomings and to bring out the very best from VIEWSHEET.

WINDOWMATIC provides a quick and easy

way to configure screen and printer allowing complicated documents and reports to be set up much more easily. It displays complete text information on all 20 windows and accurate graphic representation of the screen and printer output.

The package includes a screen dump routine for Epson printers and allows use of other printer dump packages.

WINDOWMATIC is compatible with BBC Master and BBC B+. A 6502 2nd processor must be fitted to a model B to run Windowmatic. Windowmatic is fully compatible with Turbo and 6502 2nd processor.

The program is supplied on disc with a comprehensive manual.

VU-TYPE

Do you have finger trouble when typing?

Do your letters look like this?

Dear Sor,
I wuold like to

then you need:
VU-type, a complete touch typing program produced by BBC/Pitman.

It allows you to learn at your own pace and has a wide range of exercises. Screen displays show the keys you have pressed and it will report on your speed and accuracy.

Supplied on a 40T Disc with a manual.

Available at a special price of £7.50(d)

instead of the usual £15. Offer valid while stocks last

EDUCATIONAL/FUN SOFTWARE BUNDLE

Wordmover
Wordplay

Pantry Antics

Drawstick
Locomotion

These programs are supplied from the BBC Publications Educational Software range and will be supplied on a 5.25" disc for BBC Master, B+ and B and on a 3.5" disc for the Compact.

5.25" Disc £17.50(d)

3.5" Disc £18.50(d)

(Normal RRP over £40)

PRINTER ACCESSORIES

EPSON ACCESSORIES:

| | |
|---|----------|
| Interfaces | |
| 8143 RS232..... | £30 (d) |
| 8148 + RS232 + 8k..... | £65 (d) |
| 8177P NLQ for FX80 +/FX100 +..... | £99 (d) |
| Parallel & Serial Buffers of various size also available. | |
| LQ800 Tractor Feed..... | £47 (b) |
| LQ1000 Tractor Feed..... | £52 (b) |
| SHEET FEEDERS: | |
| LQ800..... | £135 (b) |
| LQ1000..... | £179 (b) |
| EX800..... | £135 (b) |
| EX1000..... | £309 (b) |
| FX800..... | £135 (b) |

| | |
|--|------------|
| FX1000..... | £179 (b) |
| Ribbons: | |
| RX/FX100/100 +, FX105..... | £7 (d) |
| RX/FX80/80 +, FX85..... | £4 (d) |
| LX80/LX800..... | £4.50 (d) |
| LQ800..... | £8.50 (d) |
| LQ1000..... | £10 (d) |
| EX800/1000..... | £7.50 (d) |
| H180 Pen Set (Aqueous/Ball point)..... | £8.25 (d) |
| HITACHI 672 Plotter | |
| Aqueous Pen Set six pens..... | £18.50 (d) |
| Oil Based Pen Set six pens..... | £25.00 (d) |
| TAXAN CANON Accessories: | |
| Ribbon, KP810/815/910/915..... | £6 (d) |
| Star Printer | |

| | |
|--|-----------|
| NL10 Sheet Feeder..... | £52 (b) |
| NL10 Ribbon..... | £4.50 (d) |
| National Panasonic KX P1080/81 | |
| Spare Ribbon..... | £4.50 (d) |
| KXP3131 Tractor..... | £90 (a) |
| KXP3131 Sheet Feeder..... | £189 (a) |
| JUKI 6100 | |
| Tractor Feed..... | £149 (a) |
| Ribbon (Carbon)..... | £2.00 (d) |
| Sheet Feeder..... | £219 (a) |
| BROTHER HR20 | |
| Tractor Feed..... | £116 (a) |
| Spare Ribbon Nylon..... | £3.00 (d) |
| Spare Ribbon Carbon..... | £4.50(d) |
| INTEGREX INK JET COLOUR PRINTER | |

| | |
|---|----------------|
| Spare Ink Cartridge Black..... | £9 (d) |
| Spare Ink Cartridge Colour..... | £15 (d) |
| Paper Roll..... | £7 (d) |
| Printer Leads: | |
| BBC Parallel Lead (1.2m)..... | £6 (d) |
| PAPER & LABELS | |
| Plain Fanfold paper with micro perforations: | |
| 2000 sheets 9½" × 11" 60 gsm/sq m..... | £12 (£3.50) |
| 2000 sheets 14½" × 11" 60 gsm/sq m..... | £18.50 (£4.50) |
| 1500 sheets A4 90 gsm..... | £18 (£3.50) |
| Labels/1000: | |
| Single Row 3½ × 1½"..... | £5.25 (d) |
| Triple Row 2½ × 1½"..... | £5 (d) |

TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE

17 Burnley Road, London NW10 1ED Tel: 01-208 1177

305 Edgware Road, London W2 Tel: 01-723 0233

EpromRyter

***Highly sophisticated & Advanced Programmer**

***Handles all current 1 rail Eproms**

***State of the Art Programming Algorithms**


EpromRyter is a powerful eprom programmer designed for use with the BBC Master Computer. It takes full advantage of the latest developments in the eprom technology and the extra facilities on the Master to provide fast, simple and efficient programming and editing facilities.

The software is totally menu driven and on screen help messages make the programming simple for both specialists and novices alike.

The EPROMRYTER interfaces with the Master through 1 MHz bus. It is mains powered with its own psu. 3M Textool zif socket has been fitted to ensure consistent and reliable service over long periods.

The single rail eproms handled by the EpromRyter are:

- 2716 2732 2764 27128 27256 27512 27513 27011
- 2516 2532 2564 (NMOS & CMOS)
- One time eproms P27XXX, 87CXXX etc.
- Also A suffix eproms such as 27XXXXA

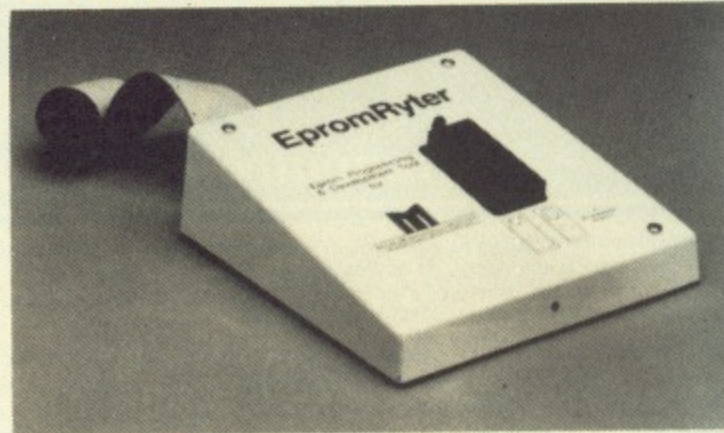

The main features of the programming software are:

- * Device, function and voltage selection from the computer keyboard.
- * Continuous display of the options selected.
- * All eproms upto 27512 (64K) programmed in single pass.
- * Automatic Intelligent identifier support for eproms able to respond.
- * Selectable programming voltage 25/21/12.5V
- * 3 programming methods: Normal, Intelligent & Pulse (30 sec for a 27128).
- * Serial port protocols supported incl Intel Hex & Motorola S.
- * DFS, NFS, ADFS and Rom Filing System Supported.
- * BASIC/Machine Code programming using RFS.
- * Powerful editor with input in HEX or ASCII. * Full editable 64K file.
- * Block move of data within the address range.
- * User can select any section of the eprom from single byte to the full address range to blank check/burn/verify. Facility to program single bytes makes program development/amendment simpler.
- * Multiple loading for ROM Filing System

Some of the above features apply to Master Computers only

EPROMER II

A proven Eprom programmer for BBC Model B and B+ with thousands in use in industry, educational and R&D establishments. It offers many of the powerful features of the EpromRyter and can program all single rail eproms upto 27256. Full details on request.

META Version III

"All the good features you would expect to find in a good source code editor are present . . . Meta assembler lives in a different world. It is structured to work with any new processor . . . as new instruction sets can be added . . . as needed . . . has a well featured editor with colour highlighting, a sound modular approach."

Acorn User October 1986

- Assembles for over 30 popular processors, including Z80, 6800/01/02/04/05/09/11 etc — and 68000 — using native mnemonics for each processor, eg. LD A, (HL) for Z80 and MOV AO, \$1000 for 68000 etc.
- Fully integrated Editor: four field, all search, search/replace, block copy, delete, move, marked save, load etc.
- Compatible with Portal Eprom Emulators and Team Disassemblers.
- Send object code in Intel Hex, S-Record, straight binary etc. down to discs, RS232, parallel port, Eprom Emulators etc — all during Assembly.
- Over 50 directives included as standard: handling nestable macros, conditional assembly and twenty types of table definition directives.
- 32 bit labels; 31 character names. Arithmetic and Boolean arithmetic to 32 bits.
- Modular source code with numeric and string parameter passing.
- Serial communicator area with eight options lines: echo, control code trap, LF supression/addition etc.
- Over 500 in use throughout the world in universities and many different industries.
- Two 16K Roms, two 80 track discs, A4 ring-band manual, function-key strip.

PORTAL EPROM EMULATORS

- Emulates 2716, 2732, 2764, 27128, 27256, 27512 eproms at 150ns Access time.
 - Load at 4Kbytes/second — No "erase" time.
 - 28 pin header plugs into Eprom socket on target system — status monitored on 13 Leds.
 - Fully software controlled from Meta Assembler.
 - 100 times faster than standard EPROM program/erase cycle.
 - Fully CMOS compatible; draws no power from target system.
 - Four portals may be independently programmed off same user-post cable.
 - Complete with all cables, manual and disc.
- PORTAL 512 (2716, 2732, 2764, 27128, 27256, 27512).

TEAM DISSASSEMBLER

The third part of the Universal Development System: a Meta labelling disassembler.

Supports 1802, 8080, 8085, HD64180, Z80, 65XX (includes 65 col, 6511 etc), 68XX (includes 00, 01, 02, 03, 08 etc):

- Up to 64K of object code translated back into META compatible source code modules: labels automatically inserted on all jump targets, memory references etc.
- Pre-editing stage allows marking of object code areas as byte, string, word, long word etc, tables. These areas disassembled into appropriate directives instead of garbage mnemonics.
- Reconstituted source code ready for immediate re-assembly by META.
- Omniversal search/replace for re-naming arbitrary label names with meaningful ones.

THE TECHNOMATIC BBC CATALOGUE REVISED AUTUMN CATALOGUE

This advertisement can only show an example of the range of products stocked by Technomatic. So send for our latest Autumn BBC catalogue providing detailed information and prices on BBC Computer Systems, Peripherals, Software and Books. Inside you'll find a £10 voucher discount offer on orders worth over £200. Technomatic is a BBC Computer and Econet Referral Centre providing a professional and reliable service to the BBC user. To obtain your free copy please complete and return the coupon below.

NAME.....

ADDRESS.....

.....Post Code.....

Return to Technomatic Ltd, 17 Burnley Road, London NW10 1ED

11/87

FILE LISTER

ONE of the troubles with producing listings of Basic programs is the excessive amount of wasted paper.

Most statement lines in Basic tend to be quite short, leaving large amounts of blank paper. Also some programs cannot be listed because of embedded, intentional or otherwise, control codes which cause the printer to do all sorts of interesting things.

When working at home space is usually at a premium, and it is difficult to debug a program when the listing is over a number of pages. Trying to find where a procedure or function is defined in a

Print your text and

Basic programs in

columns with Steve

James' utility

listing can be very annoying and time-consuming.

What is needed is a way to produce listings without wasting paper and clearly showing program sections. With this in mind, and other enhancements

like printing pure text in columns with right justification, the Lister was developed.

This program can list in up to four columns per page, which is a saving of up to 60 per cent in Basic. It will handle both Basic programs and Ascii text files and will output to printer directly or to disc for later printing.

Type in the program exactly as shown and ensure you haven't made any errors by using the checksums. When you run the program select the options you require and the source filename, then execute the print routine.

The actual printing can take quite a time, depending on the file size and column width, but it's certainly a very useful utility.

```

10 REM Multicolumn File Lister
20 REM Written by S E James
30 REM (c) The Micro User
40 MODE7:DIM p$(68):*FX229,1
50 spc$="":hex$=CHR$145:*FX4,1
60 FOR YX=0 TO 1:VDU141,132,157,135
70 PRINT"LISTER"CHR$140SPC2;
80 PRINT"Multicolumn Listing":NEXT
90 VDU28,0,24,39,2:FOR IX=1 TO 68
100 p$(IX)=STRING$(150,"*"):NEXT
110 PRINTTAB(0,1)CHR$134"C. Columns"TAB
B(12,1)CHR$135"3"TAB(20,1)CHR$134"Column
width"CHR$131" 37"TAB(0,2)CHR$134"W. Wi
dth"TAB(12,2)CHR$135"132"
120 PRINTTAB(0,3)CHR$134"L. Length"TAB
(12,3)CHR$135"70"TAB(20,3)CHR$134"Print
Length"CHR$131" 66":PRINTTAB(0,4)CHR$134
"F. Format"TAB(12,4)CHR$135"BASIC"
130 PRINTTAB(0,5)CHR$134"H. Header"TAB
(12,5)CHR$135"YES"TAB(0,6)CHR$134"D. Dev
ice"TAB(12,6)CHR$135"PRINTER"TAB(0,8)CHR
$134"S. Source"TAB(12,8)CHR$135
140 PRINTTAB(0,10)CHR$134"O. Output"TA
B(12,10)CHR$135TAB(0,12)CHR$134"T. Title
"TAB(12,12)CHR$135TAB(0,14)CHR$134"X. Ex
ecute":PRINTTAB(0,16)CHR$134" Option"CHR
$135;
150 columns%=3:colwidth%=37:width%=132
160 throw%=70:header%=TRUE:basic%=TRUE
170 src$="":src%=0:dst$="":dst%=0
180 prnt%=TRUE:title%=STRING$(25," ")
190 def%=FALSE:data%=FALSE:plen%=66
200 esc%=FALSE:REPEAT PROCselect
210 IF NOT esc% PROCmainsection
220 VDU7:PRINTTAB(0,20)STRING$(39," ")
230 UNTIL esc%:PROCquit:MODE7:END
240 DEFPROCselect:VDU23,1,1;0;0;0;
250 REPEAT esc%=FALSE
260 opt%=FNalpha(" ",1,13,16):IF esc% E
NDPROC
270 IFopt$="C" columns%=(columns% MOD4
)+1:PRINTTAB(13,1)RIGHT$(STR$(columns%),
1):PROCcolwidth
280 IFopt$="W" width%=FNinteger(width%
,3,13,2):PROCcolwidth
290 IFopt$="L" throw%=FNinteger(throw%
,2,13,3):PROCthrow
300 IFopt$="F" basic%=NOT basic%:PROCF
ilotype:PROCcolwidth
310 IFopt$="H" header%=NOT header%:PRO
Cheader:PROCthrow
320 IFopt$="D" prnt%=NOT prnt%:PROCdev

```

```

ice
330 IFopt$="S" src%=FNalpha(src$,12,13
,8):PROCchksource
340 IFopt$="0" dst%=FNalpha(dst$,12,13
,10):PROCchkoutput
350 IFopt$="T" title%=FNalpha(title$,2
5,13,12)
360 IFopt$="X" PROCchkexecute
370 UNTIL opt$="X" AND (src%<>0) AND (
dst%<>-1)
380 ENDPROC
390 DEFPROCcolwidth:IF basic% colwidth
%=(width%/columns%)-6 ELSE colwidth%=(wi
dth%/columns%)-2
400 PRINTTAB(34,1)RIGHT$( " "+STR$(co
lwidth%),3):ENDPROC
410 DEFPROCfiletype:IF basic% PRINTTAB
(13,4)"Basic" ELSE PRINTTAB(13,4)"Ascii"
420 ENDPROC
430 DEFPROCheader:IF header% PRINTTAB(
13,5)"YES" ELSE PRINTTAB(13,5)"NO "
440 ENDPROC
450 DEFPROCdevice:IF prnt% PRINTTAB(13
,6)"Printer":dst%=0 ELSE PRINTTAB(13,6)"
Disc"SPC3:dst%=-1
460 ENDPROC
470 DEFPROCthrow:IF header% plen%=thro
w%-4 ELSE plen%=throw%-2

```

```

600 DEFPROCchkexecute
610 PROCchksource:PROCchkoutput
620 IF src%=0 VDU7:PRINTTAB(26,8)CHR$1
29CHR$157CHR$135"SELECT":opt$=""
630 IF dst%=-1 VDU7:PRINTTAB(26,10)CHR
$129CHR$157CHR$135"SELECT":opt$=""
640 ENDPROC
650 DEFPROCmainsection:src%=OPENIN(src
%):IF basic% byte%=BGET#src%
660 VDU23,1,0;0;0;0;:IF (NOT prnt%) ds
t%=OPENOUT(dst%)
670 PX=0:LX=1:line$="":word$="":PROCCl
ear:eof%=FALSE
680 REPEAT
690 IF basic% PROCbasic ELSE PROCascii
700 UNTIL eof%
710 PROCprintpage:CLOSE#0:ENDPROC
720 DEFPROCclear:FORJX=1TO plen%:p$(JX
)=""NEXT:line%=1:column%=0:ENDPROC
730 DEFPROCbasic:byte%=BGET#src%:IF by
te%=&FF eof%=TRUE:ENDPROC
740 Y%=BGET#src%:number%=RIGHT$( "
"+STR$(byte%*256+Y%),5):PRINTTAB(0,20)CHR
$131"PROCESSING LINE "CHR$135:number$;
" ":linelen%=BGET#src%:charcount%=3:qu
ote%=FALSE:data%=FALSE:def%=FALSE
750 REPEAT PROCbasichar
760 UNTIL charcount%=linelen%
770 PROCbasicpage:line$=""ENDPROC
780 DEFPROCbasichar:byte%=BGET#src%:ch
arcount%=charcount%+1
790 :IF byte%=&DD def%=TRUE
800 IF byte%=34 quote%=NOT quote%
810 IF byte%>31 AND byte%<127 line$=Li
ne$+CHR$(byte%):ENDPROC
820 IF byte%>127 AND byte%<800 PROCnon
ascii:ENDPROC
830 IF byte%>87F PROCtoken
840 IF byte%=&8D PROClinenumber
850 IF byte%=&DC data%=TRUE
860 ENDPROC
870 DEFPROCascii:IF EOF#src% eof%=TRUE
:ENDPROC
880 REPEAT REPEAT
890 byte%=BGET#src%:IF byte%>32 AND by
te%<127 word$=word$+CHR$(byte%)
900 PRINTTAB(0,20)CHR$131"PROCESSING "
CHR$135;word$;SPC(20)
910 UNTIL byte%=13 OR byte%=32
920 IF LEN(line$)+LEN(word$)<=colwidth

```

This is one of hundreds of
programs now available
FREE for downloading on

MicroLink

```

480 PRINTTAB(35,3)RIGHT$( " "+STR$(ple
n%),2):ENDPROC
490 DEFPROCchksource
500 PRINTTAB(26,8)STRING$(12," ")
510 IF src%>" src%=OPENIN(src%)
520 IF src%=0 VDU7:PRINTTAB(26,8)CHR$1
29CHR$157CHR$135"NOT FOUND"
530 CLOSE#0:ENDPROC
540 DEFPROCchkoutput
550 PRINTTAB(26,YX)STRING$(12," ");
560 dst%=0:IF prnt% ENDPROC
570 IF dst%>" dst%=OPENIN(dst%)
580 IF dst%<>0 VDU7:PRINTTAB(26,10)CHR
$129CHR$157CHR$135"EXISTS"
590 CLOSE#0:ENDPROC

```

Turn to Page 124 ▶

◀ From Page 123

```
% line$=line$+word$:word$=":IF byteX=32
line$=line$+" "
930 IF LEN(line$)+LEN(word$)>colwidthX
PROCasciipage:line$=word$:word$=":IF b
yteX=32 AND line$<>" line$=line$+" "
940 UNTIL byteX=13
950 PROCasciipage:line$=":word$=":EN
DPROC
960 DEFPROCnonascii:IF basicX line$=li
ne$+hex$+FNhex(byteXDIV16)+FNhex(byteXMO
D16):ENDPROC
970 IF (NOT basicX) line$=line$+CHRS(b
yteX):ENDPROC
980 DEFFNhex(IX)=MIDS("0123456789ABCDE
F",IX+1,1)
990 DEFPROCtoken:IF quoteX OR dataX PR
OCnonascii:ENDPROC
1000 IF byteX=88D ENDPROC
1010 RESTORE:IX=byteX-88D:FORJX=0TOIX:R
EAD bas$:NEXT:line$=line$+bas$:ENDPROC
1020 DEFPROClinenumber:IF quoteX PROCno
nascii:ENDPROC
1030 byteX=BGET#srcX:YX=BGET#srcX:ZX=BG
ET#srcX:charcountX=charcountX+3:YX=YX EOR ((byteX AND 48)*4):ZX=ZX EOR ((byteX A
ND 12)*16):line$=line$+STRS(ZX*256+YX):E
NDPROC
1040 DEFPROCbasicpage:SX=LEN(line$):IF
defX p$(lineX)=p$(lineX)+STRING$(6," ")
+STRING$(colwidthX,spc$)+" ":lineX=lineX+
1:PROCckpage
1050 line$=line$+STRING$(255-SX," "):IX
=1:p$(lineX)=p$(lineX)+number$+" "+FNbas
iccut(0)+" ":lineX=lineX+1:PROCckpage:IF
SX<colwidthX+1 ENDPROC
1060 REPEAT
1070 p$(lineX)=p$(lineX)+STRING$(6," ")
+FNbasiccut(IX)+" ":lineX=lineX+1:PROCck
kpage:IX=IX+1
1080 UNTIL SX<(IX*colwidthX+1)
1090 ENDPROC
1100 DEFPROCasciipage
1110 GX=1:REPEAT
1120 IF RIGHTS(line$,1)=" " line$=LEFTS
(line$,LEN(line$)-1)
1130 UNTIL RIGHTS(line$,1)<>" "
1140 IF LEN(line$)<colwidthX PROCstretc
h
1150 p$(lineX)=p$(lineX)+LEFTS(line$+ST
RINGS(colwidthX+2," "),colwidthX+2):line
X=lineX+1:PROCckpage:line$=":ENDPROC
1160 DEFPROCstretch:GX=1:IF LEN(line$)<
colwidthX/2 ENDPROC
1170 IF INSTR(line$," ",1)=0 ENDPROC
1180 REPEAT
1190 HX=INSTR(line$," ",GX):IF HX<0 li
ne$=LEFTS(line$,HX)+" "+RIGHTS(line$,LEN
(line$)-HX):GX=HX+2 ELSE GX=1
1200 IF GX>=colwidthX GX=1
1210 UNTIL LEN(line$)=colwidthX
1220 ENDPROC
1230 DEFPROCckpage:IF lineX<plenX ENDP
ROC
1240 lineX=1:columnX=columnX+1:IF colum
nX<columnsX ENDPROC
1250 PROCprintpage:PROCclear:ENDPROC
1260 DEFFNbasiccut(xX)=LEFTS(MIDS(line
$,xX*colwidthX+1,colwidthX)+STRING$(colw
idthX," "),colwidthX)
1270 DEFPROCprintpage:IF lineX=1 AND co
lumnX=0 ENDPROC
1280 IF (NOT prntX) PROCspool:PROCclear
:ENDPROC
1290 PRINTTAB(0,20)CHRS131"PRINTING";SP
```

```
C(32):VDU2,21,1,15:PX=PX+1:IF headerX PR
INT src$;SPC(5);title$;SPC(13);"Page ";P
X'
1300 FOR JX=1 TO plenX:PRINT p$(JX):NEX
T:FOR JX=(headerX*-2)+plenX+1 TO throwX:
PRINT:NEXT:VDU6,3:PROCclear:ENDPROC
1310 DEFPROCspool:PRINTTAB(0,20)CHRS131
"SPoolING";SPC(32)
1320 IF headerX t$=src$+STRING$(5," ")
+title$+STRING$(13," ")+"Page "+PX:FORJX=
1TOLEN(t$):BPUT#dstX,ASC(MIDS(t$,JX,1)):
NEXT:BPUT#dstX,13
1330 FOR JX=1 TO plenX:IF LEN(p$(JX))=0
BPUT#dstX,13
1340 IF LEN(p$(JX))>0 FORKX=1TOLEN(p$(J
X)):BPUT#dstX,ASC(MIDS(p$(JX),KX,1)):NEX
T:BPUT#dstX,13
1350 NEXT:FOR JX=(headerX*-2)+plenX+1 T
O throwX:BPUT#dstX,13:NEXT:ENDPROC
1360 DEFFNalpha(t$,LX,XX,YX)
1370 LOCAL KX,testX
1380 REPEAT PRINTTAB(XX,YX)t$SPC1;
1390 VDU8:REPEAT KX=GET:escX=(KX=27)
1400 testX=(KX>31 AND KX<127)
1410 UNTILtestXORescXORKX=13ORKX=127
1420 IF testX IF LEN(t$)<LX t$=t$+CHRSK
X
1430 IF KX=127 IF t$>" " t$=LEFTS(t$,LEN
(t$)-1)
1440 UNTIL escX OR KX=13 OR (LX=1 AND t
$>""):=t$
1450 DEFFNinteger(valX,mantX,XX,YX)
1460 LOCAL mant$,KX:mant$=STRS(valX)
1470 escX=FALSE:REPEAT
1480 PRINTTAB(XX,YX)mant$SPC1;
1490 VDU8:REPEAT KX=GET
1500 UNTIL KX=13 OR KX=27 OR (KX>=48 AN
D KX<=57) OR KX=127
```

```
1510 IF KX=27 escX=TRUE
1520 IF (KX>=48 AND KX<=57) IF LEN(mant
$)<mantX mant$=mant$+CHRS(KX)
1530 IF KX=127 IF mant$>" " mant$=LEFTS(
mant$,LEN(mant$)-1)
1540 UNTIL escX OR KX=13:=VAL(mant$)
1550 DATA "AND","DIV","EOR","MOD","OR",
"ERROR","LINE","OFF","STEP","SPC","TAB(
","ELSE","THEN","<8D>","OPENIN","PTR"
1560 DATA "PAGE","TIME","LOMEM","HIMEM"
,"ABS","ACS","ADVAL","ASC","ASN","ATN",
"BGET","COS","COUNT","DEG","ERL","ERR"
1570 DATA "EVAL","EXP","EXT","FALSE","F
N","GET","INKEY","INSTR","INT","LEN","L
N","LOG","NOT","<AD>","OPENOUT","PI"
1580 DATA "POINT(","POS","RAD","RND","S
GN","SIN","SQRT","TAN","TO","TRUE","USR",
"VAL","VPOS","CHRS","GETS","INKEYS"
1590 DATA "LEFTS(","MIDS(","RIGHTS","ST
RS(","STRING$(","EOF","AUTO","DELETE","L
OAD","LIST","NEW","OLD","RENUMBER","SAVE
","<CE>","PTR"
1600 DATA "PAGE","TIME","LOMEM","HIMEM"
,"SOUND","BPUT","CALL","CHAIN","CLEAR",
"CLOSE","CLG","CLS","DATA","DEF","DIM","D
RAW"
1610 DATA "END","ENDPROC","ENVELOPE","F
OR","GSUB","GOTO","GCOL","IF","INPUT","L
ET","LOCAL","MODE","MOVE","NEXT","ON","V
DU"
1620 DATA "PLOT","PRINT","PROC","READ",
"REM","REPEAT","REPORT","RESTORE","RETUR
N","RUN","STOP","COLOUR","TRACE","UNTIL"
,"WIDTH","<FF>"
1630 DEFPROCquit
1640 *FX4,0
1650 *FX229,0
1660 ENDPROC
```



This listing is included in this month's tape & disc offer. See order form on Page 149.

| | | |
|--------------|--------------|--------------|
| 10 = 00 | 290 = B233 0 | 570 = 4AF7 3 |
| 20 = 00 | 300 = A966 8 | 580 = A67A 1 |
| 30 = 00 | 310 = 190C 9 | 590 = F1F8 A |
| 40 = 5096 6 | 320 = B49F 6 | 600 = 6A6 5 |
| 50 = 1084 3 | 330 = FA77 0 | 610 = E2DF 2 |
| 60 = 644D 0 | 340 = E77E 6 | 620 = BD43 3 |
| 70 = BA5 2 | 350 = 286A B | 630 = 5A4C B |
| 80 = 9171 8 | 360 = 8558 B | 640 = ED0F 1 |
| 90 = E175 B | 370 = D823 A | 650 = BE65 9 |
| 100 = 1020 6 | 380 = ED0F B | 660 = B421 0 |
| 110 = CCDA A | 390 = 2718 A | 670 = 5FD1 3 |
| 120 = 8995 1 | 400 = 468A A | 680 = BFBA 1 |
| 130 = 7AED 2 | 410 = 5823 F | 690 = 634 7 |
| 140 = 85FD E | 420 = ED0F 6 | 700 = 50CD 2 |
| 150 = 9098 4 | 430 = DC6C 1 | 710 = BA32 C |
| 160 = E859 C | 440 = ED0F E | 720 = DA5A 2 |
| 170 = 1E24 7 | 450 = F3DE 3 | 730 = 8D61 2 |
| 180 = 6D17 5 | 460 = ED0F 7 | 740 = 4D1 6 |
| 190 = 2E9C A | 470 = 3BB9 0 | 750 = F586 6 |
| 200 = 60D4 F | 480 = 903A 7 | 760 = 4F53 3 |
| 210 = 18E6 9 | 490 = 35B0 C | 770 = CA70 5 |
| 220 = F9B6 C | 500 = 3A95 2 | 780 = 70D8 2 |
| 230 = 631E 0 | 510 = C97F C | 790 = 961C F |
| 240 = D51 A | 520 = 47FE 5 | 800 = 3C62 4 |
| 250 = DDF0 1 | 530 = F1F8 4 | 810 = FD55 E |
| 260 = F69C 8 | 540 = D532 1 | 820 = A116 A |
| 270 = D14F 7 | 550 = 11DA D | 830 = AF00 9 |
| 280 = 69B3 2 | 560 = 25FA E | 840 = 7B14 5 |

| | | |
|---------------|---------------|---------------|
| 850 = CC87 B | 1130 = 73F 5 | 1410 = 86ED A |
| 860 = ED0F 5 | 1140 = 4DD4 4 | 1420 = 3610 7 |
| 870 = 3130 A | 1150 = FC72 7 | 1430 = E268 4 |
| 880 = B1FE A | 1160 = 9916 3 | 1440 = EBD5 9 |
| 890 = 5F09 C | 1170 = 58E F | 1450 = A703 B |
| 900 = CBE3 A | 1180 = BFBA 5 | 1460 = 8A30 D |
| 910 = 68B3 3 | 1190 = 68D6 F | 1470 = 87B9 6 |
| 920 = 9A7A 8 | 1200 = AE0A 9 | 1480 = E3B2 8 |
| 930 = 3046 4 | 1210 = 5387 6 | 1490 = 7C3C D |
| 940 = FC1C D | 1220 = ED0F C | 1500 = 2562 D |
| 950 = 5BE3 B | 1230 = 7322 D | 1510 = A1DA B |
| 960 = 5220 C | 1240 = D0EF B | 1520 = 5F37 A |
| 970 = F962 6 | 1250 = 4D5F 3 | 1530 = BDF2 F |
| 980 = 8DD1 7 | 1260 = 6E19 9 | 1540 = E90D 2 |
| 990 = 66F5 9 | 1270 = 5267 E | 1550 = 5C0D 8 |
| 1000 = 1010 8 | 1280 = 63A5 5 | 1560 = 82BE C |
| 1010 = 86B2 9 | 1290 = E62D F | 1570 = 4E99 6 |
| 1020 = 2B34 A | 1300 = E95D 6 | 1580 = 95A1 9 |
| 1030 = CF56 0 | 1310 = 563 8 | 1590 = C3B B |
| 1040 = 1E20 0 | 1320 = 22EF F | 1600 = 7C99 A |
| 1050 = E4C2 B | 1330 = 9665 8 | 1610 = 7922 7 |
| 1060 = BFBA 0 | 1340 = 635C 7 | 1620 = 9CB2 C |
| 1070 = 6D2 5 | 1350 = 9CEA 5 | 1630 = 19BA C |
| 1080 = 330C F | 1360 = 5F2B 6 | 1640 = F3A2 3 |
| 1090 = ED0F 0 | 1370 = D5CE C | 1650 = 4C0B 1 |
| 1100 = B0D0 6 | 1380 = FC61 3 | 1660 = ED0F 2 |
| 1110 = 3BAC F | 1390 = 36A7 7 | |
| 1120 = 4036 8 | 1400 = A1F7 B | |

IEEE488 INTERFACE PODULES FOR THE ACORN ARCHIMEDES AND SPRINGBOARD COMPUTER SYSTEMS

The combination of Acorn 32-bit RISC Technology and Intelligent Interfaces hardware and software design results in an extremely fast and powerful IEEE488 Interface Controller for ATE (Automatic Test Equipment) systems.

- Full implementation of IEEE Std 488.
- Enables the computer to communicate with up to 14 IEEE488 interface compatible instruments
- Extremely fast data transfer rate (around 250 Kbyte/s)
- Can be configured as the system controller or as a simple talker/listener
- As controller in charge can send all addressed and universal commands and conduct both serial and parallel polls
- Ultra high level software interface for ease of use BBC BASIC Procedures and Functions supplied on disc optional libraries of procedures for FORTRAN 77, ISO Pascal, C etc
- Comprehensive user guide

Intelligent Interfaces supply IEEE488 Interface Controllers based on the Acorn Archimedes or the Compaq Deskpro Computer Systems. They designed, developed, manufacture and support the Acorn IEEE488 Interface for the BBC Models B, B+ and Master 128 Microcomputers.

Officially appointed Acorn Scientific Dealer.



Intelligent Interfaces Ltd

43b Wood Street

Stratford-upon-Avon

Warwickshire

CV37 6JQ

Tel: 0703 261514 or

0789 415875 (Head Office)

Telex: 312242 MIDTLX G



CHANGE YOUR LIFESTYLE!

- FACT:** Intelligent INVESTMENT in horse-racing can make you very rich indeed. A skilfully-managed investment 'bank' can multiply very quickly.
- FACT:** So many 'mug' punters gamble rather than INVEST, such that there is a huge pool of funds which the intelligent investor can tap to make excellent profits.
- FACT:** Successful investment in racing has hitherto been very hard work, as knowing which horses to be 'on' has usually required many hours of painstaking study. Successful investors have largely, until now, needed to be enthusiasts.
- FACT:** The sophisticated analysis needed to pin-point profitable racing investments can now be handled by an 'expert system' designed for your home micro: you do not need to be a racing expert or even an enthusiast to partake in this highly profitable activity.
- FACT:** Such a system is now available from DGA SOFTWARE. It's called PRO-PUNTER. It uses information from the racing press and tells you which horses to back. It's starting to generate a lot of excitement.
- FACT:** Impressive results from PRO-PUNTER are regularly being proofed to the racing press. 50%-60% of all top-rated horses win. 17 investment advices have produced 13 winners with a 107% PROFIT on capital investment. Top-rated forecasts recently proofed to 'The Micro User' produced 7 winners from 14 races at starting prices of 5/2, 7/2, 4/1, 6/1, 13/8, 12/1 and 11/2. That's £267.25 CLEAR PROFIT from 14 RACES to a £10 level-stake, tax paid.
- FACT?** You will be richer next year than you are now.

PRO-PUNTER costs £57.50 including VAT, P&P.

Orders and enquiries to:

DGA SOFTWARE, P.O. Box 36, Ashton-under-Lyne, OL7 9AJ

Arraymate from FOSSE SYSTEMS

for total control of your arrays!

Arrays are the fundamental data structure in BBC Basic - but they have their limitations. Now **Arraymate** is here to help you to realise their full potential.

With **Arraymate's** powerful 'star' commands at your fingertips, you can ...

- ★ Sort an array into ascending or descending order - any array type, any number of dimensions.
- ★ Select the key elements to be used in sorting.
- ★ 'Rotate' the contents of an array, up or down.
- ★ List dimensions and program references of current arrays.
- ★ Selectively erase an array.
- ★ Simulate passing array parameters to a procedure.
- ★ Safeguard all your variables while you edit your program, or even chain in a new one!
- ★ ... and more!

Arraymate is supplied on Eprom, and is compatible with BBC Model B, B+ and Master.

Only **£15.75** inc. p&p. 30-day money-back guarantee. Trade enquiries welcome.

Order now for immediate dispatch, from FOSSE SYSTEMS, 3 The Chipping, Tetbury, Glos. GL8 8EU. Tel (0666) 54477.



Please send me _____ **Arraymate** Eproms @ £15.75 each

I enclose a cheque/postal order for £ _____

Name _____ Address _____

EPROMS & D RAMS

| | |
|-------------------------------------|-----------------------------|
| 27128-250N/S 21V | (While stocks last) £3.55ea |
| 27128-250N/S 'A' 12V | £3.20ea |
| 27128 (One time programmable) | £2.80ea |
| 27256 | £4.30 ea |
| 2764-250 N/S 21V | (While stocks last) £2.60ea |
| 6264-150N/S | £2.29ea |
| 4164-150N/S | £0.99ea |
| 41256-150N/S | £2.20ea |
| 41257-15 N/S | (While stocks last) £2.20ea |

SPECIAL OFFERS

| | |
|---|----------------|
| 5.25" DS/DD 96tpi | £0.55 |
| Minimum quantity sold in 10 (supplied individually sleeved, all labels and tags with a white cardboard box for storage) | |
| 3.5" JVC Branded Disc DS/DD 135tpi | £1.55 |
| 3" DS/DD Disc | £3.00 |
| 20Mb Winchester Hard Disc Drive complete with WX2 Western Digital Controller Board (connection cable etc., etc.) .. | £299.00 |
| TTL & CMOS chips (excl. DFS ROM) to be used with 8271 Disc Drive Controller | each set £2.95 |
| WD1772 | £13.50ea |

All prices include P&P

Send your order by post with cheque or postal order. Or phone through your order by quoting your Access or Barclaycard number

HOT LINE

24 Hrs Service 01-550 6514 24 Hrs Service

Please phone for special price on bulk purchase

If any products purchased from this advert fails to give complete satisfaction. Please return to us unused within 30 days for a full refund or free replacement. This guarantee is offered in addition to your statutory rights.

No VAT is charged (Not VAT Registered)

J & J MICROCHIPS LIMITED
PO Box 18, Essex IG8 0RB

Co. Reg. No: 1965704

POOLSWINNER II

THE ULTIMATE POOLS PREDICTION PROGRAM

- **MASSIVE DATABASE** Poolswinner is a sophisticated Pools prediction aid. It comes complete with the largest database available - 22000 matches over 10 years.
- **PREDICTS** Not just SCOREDRAWS, but ALWAYS, HOMES and NO SCORES.
- **SUCCESSFUL** SELEC guarantee that Poolswinner performs significantly better than chance.
- **ADAPTABLE** Probabilities are given on every fixture - choose as many selections as you need for your bet. The precise prediction formula can be set by the user - you can develop and test your own unique method.
- **SIMPLE DATA ENTRY** All team names are in the program. Simply type in the reference numbers from the screen. Or use FIXGEN to produce fixture list automatically (see below).
- **LEAGUE AND NON-LEAGUE** All English and Scottish League teams are supported, and also the non-league sides often used on pools coupons.
- **PRINTER SUPPORT** Full hard copy printout of data if you have a printer.

PRICE £15.00 (all inclusive)



Boxed, with detailed instruction booklet

FOOTBALL FOLLOWER

RESULTS DATABASE SYSTEM

- **THE PERFECT PROGRAM** for everyone interested in Football - Soccer Fans, Pools Punters, amateur league secretaries and team managers.
- **POWERFUL DATABASE** designed to store league results and all important statistics for all clubs.
- **SET UP** to handle English and Scottish league matches, but can be easily converted to non-league, amateur and Australian football.
- **FULL PRINTER SUPPORT:** Fixture lists, results, league tables, statistical records etc. can be printed out if you have a printer, or copied from the screen.
- **UPDATED:** The package is supplied with this season's football results already entered into the program.
- **INTEGRATED** with POOLSWINNER and FIXGEN: information can be exchanged between programs. (Can be used to update Poolswinner.)

PRICE £15.00 (all inclusive)



Boxed, with detailed instruction booklet

FIXGEN 87/8

AT LAST: No more struggling for hours to get the fixture list into the computer. FIXGEN has been programmed with all English and Scottish League fixtures for 1987/8. Simply type in the date, and the full fixture list is generated in seconds. Fully compatible with Poolswinner and Football Follower. Yearly updates available. (Published under licence from the Football League and Scottish Football League.)

POOLSWINNER with FIXGEN £16.50 (for both)
FOOTBALL FOLLOWER with FIXGEN £16.50 (for both)

SPECIAL COMBO PACK

FOR SOCCER FANS, the best combination is Football Follower with Fixgen.
FOR POOLS PUNTERS who want a ready made system, Poolswinner with Fixgen is the best combination.
FOR POOLS PUNTERS who want to do more detailed analysis and develop their own system, the complete suit of all three programs is available at a special price:

POOLSWINNER + FOOTBALL FOLLOWER + FIXGEN
£26.50 (all inclusive) (ask for "COMBO PACK")



Boxed, with detailed instruction booklet

COURSEWINNER v3

THE PUNTERS COMPUTER PROGRAM

NOT JUST A TIPSTER PROGRAM, Coursewinner V3 can be used by experts and occasional punters alike. You can develop and test your own unique winning system by adjusting the analysis formula, or use the program in simple mode. Coursewinner V3 uses statistical analysis of major factors including past form, speed ratings, course statistics, prize money, weight, going, trainer and jockey form etc. etc. It outputs most likely winners, good long odds bets, forecasts, tricast etc. The database includes vital course statistics for all British courses. You can update the database - never goes out of date. FULL PRINTER SUPPORT.

PRICE £15.00 (all inclusive) includes Flat AND National Hunt versions.

AVAILABILITY . . .
All programs available for:

AMSTRAD CPC's, PCW's, PC1512
All BBC's
All SPECTRUMS
COMMODORE 64/128

All programs supplied on tape, but automatically transfer to disc or microdrive. AMSTRAD PCW and PC1512 supplied on disc (add £3.00).

Send Cheques/POs for return of post service to . . .



phone 24 hrs

37 COUNCILLOR LANE, CHEADLE, CHESHIRE SK8 2HX. ☎ 061-428 7425
(Send for full list of our software)

selec
SOFTWARE



phone 24 hrs

DABS PRESS

Serious BBC Micro users start here.....

Master Emulation ROM by David Spencer

This amazing ROM gives you virtually all the software features of a Master 128 on your BBC B or B+. *SRLOAD and *SHADOW work if hardware (ie, Solidisk) present. All 1770 DFS extras implemented. *CONFIGURE and *STATUS, *LIBFS etc. Full spec. on request. £19.95 ROM or £14.95 as Sideways RAM image on disc. Free assembly language book worth £8 with every order.

Fingerprint by David Spencer

A machine code monitor for all versions of the BBC Micro, with powerful single-step trace and execution facilities, full screen memory editing and disassembly for an amazingly low price! 8 breakpoints in RAM or ROM, full support for 65C02 & R65C02 mnemonics, unobtrusive 2-line display, output to screen, printer or RS232. Disc contains normal, sideways RAM, and Tube versions. Supplied with keystrip and 32pp manual. Only £9.95

Other Dabs products

| | |
|--|--------|
| Master Operating System: A Dabhand Guide | £12.95 |
| Master Operating System Book and Disc | £17.95 |
| View: A Dabhand Guide (with disc) | £17.95 |
| Conversion Kit - Programmers collection of routines only | £7.95 |
| Assembler Bundle - two books, two discs 90 programs | £9.95 |
| Coming soon ViewSheet/ViewStore Dabhand Guide | |

Prices inc. VAT and p&p in UK. ACCESS/VISA accepted by post/phone. Full catalogue free on request. Add £2 for 3.5" discs. Add £2 per order if outside UK. Official and dealer orders welcomed. See us at the November Micro User Show (London)

DABS PRESS 76 Gardner Road Prestwich Manchester
M25 7HU Tel: 061-773 2413 • Prestel 942876210

W O S T W A R E

Whatever your subject...

French, First Aid, Football, Spelling, Science, Spanish, Sport, Scotland, England, English Words, German, General Knowledge, Geography, Italian, Arithmetic, Natural History and Welsh.

Let your computer help you learn

Write or phone for a FREE 20 page illustrated catalogue of our Leisure and Educational Software

KOSMOS SOFTWARE LIMITED
FREEPOST (no stamp needed)
DUNSTABLE, Beds. LU5 6BR
Tel: 05255 3942 or 5406

GALLERY

No. 8

THANKS for the pictures – keep sending them in. Here are some works of art by Allan Miles, Russell Daniel, Stephen Kilbane and Fractal generator by Robert Geraghty.

We don't mind whether it's just one masterpiece or a full gallery that you send – if the pictures are good you'll see them in print. Please send screens on disc or tape and say which package they were drawn with.


The address to send them is Gallery, The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.



Elite by Stephen Kilbane




Red Admiral by Allan Miles

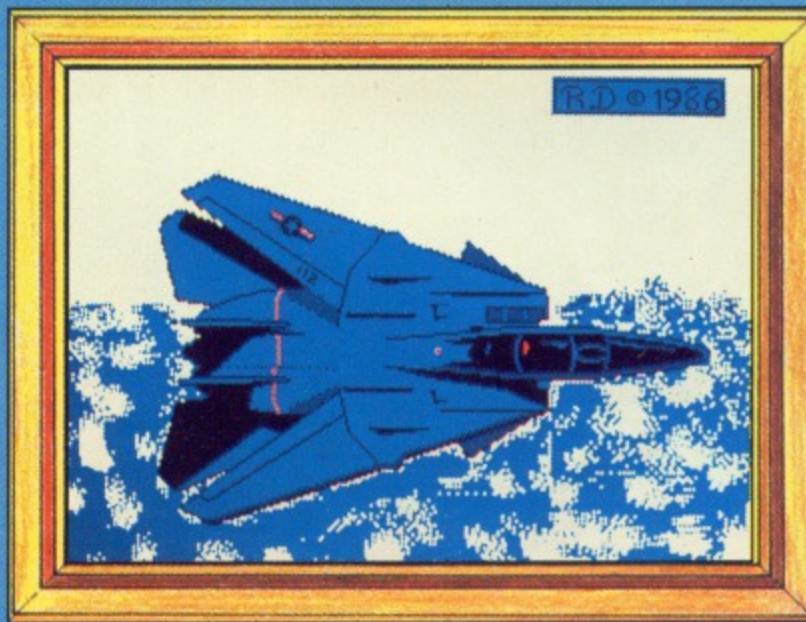

Meow by Russell Daniel (The plane is a Tomcat)



Druid by Stephen Kilbane

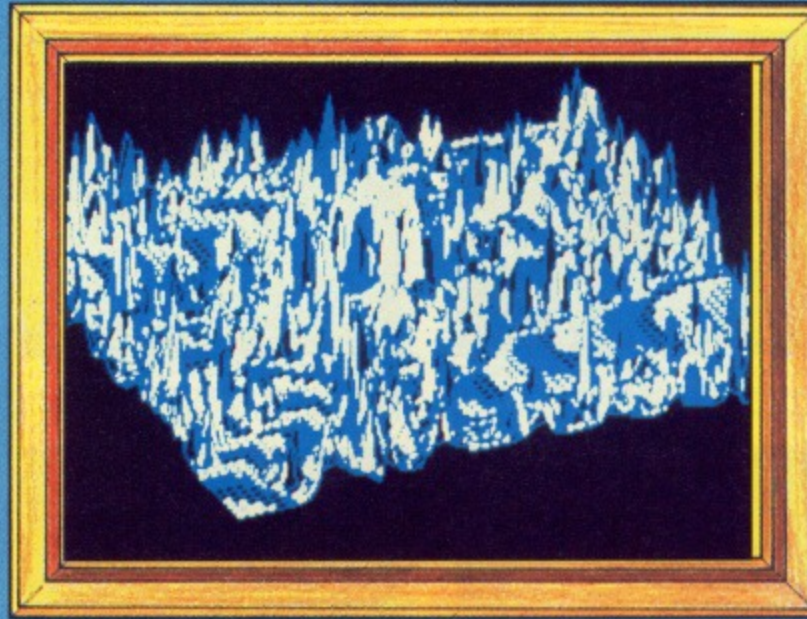

Fractal landscape by Robert Geraghty

Acorn
The choice of experience.

**PEARTREE
COMPUTERS LTD**

**Approved
Acorn dealer**


Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595




► PEP024



Studio Desk menu with mouse driven record, play, rewind options

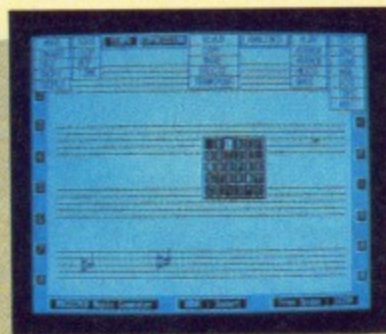

Music Editor menu, light pen & mouse driven with complete menu options at top

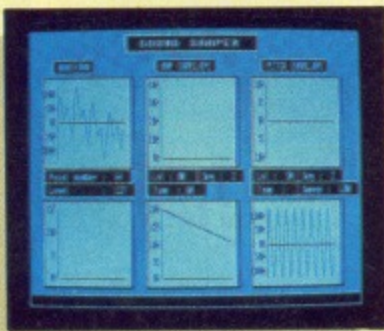

Sound Shaper allowing you to create your own waveforms, envelopes, mouse, lightpen or keyboard driven



Instrument definer allows you to define your own instrument pitch, amplitude and wave forms

OVER

17000

visitors attended the 87 Acorn User Show. Most were amazed at the performance of the **MUSIC 87**. As a result we have been receiving hundreds of telephone calls from people wanting to know the differences and merits of the **MUSIC 87** synthesiser when compared to more expensive music synthesisers. Below is a table showing how the **MUSIC 87** compares to the Music 5000.*

9 good reasons to buy the **MUSIC 87** rather than the Music 5000.*

| FUNCTION | Music 5000 | MUSIC 87 |
|--|------------|-----------------|
| Mouse driven | × | ✓ |
| 2nd processor compatible | × | ✓ |
| Light pen driven | × | ✓ |
| Full 32k EPROM | × | ✓ |
| Waveform designer as standard | × | ✓ |
| Ability to bypass AMPLE | × | ✓ |
| Graphic representation of waveforms, envelopes and score | × | ✓ |
| Music printout as standard | × | ✓ |
| Expensive | ✓ | × |

Price Music 5000.* **MUSIC 87**
£161.00 **£79.95**



MUSIC 87 software to upgrade your Music 500 or 5000 only **£39.95**

*Music 5000 is supplied by Hybrid Technology Limited



Pear tree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

PEARTREE COMPUTERS LTD

Approved service centre for all Acorn products.

HARDWARE

| | | |
|---|--|----------|
| ACH001 | BBC MASTER 128 128K complete with View, Viewsheet, basic editor, ADFS 1770 DFS | £385.00 |
| *** special offer includes FREE MUSIC 500 | | |
| ACH002 | BBC MASTER COMPACT 128K computer 640K disc drive built in RGB comp video, joystick and printer port | £375.00 |
| ACH003 | BBC MASTER COMPACT TV As above with PAL TV modulator | £395.00 |
| ACH004 | BBC MASTER COMPACT MONO As above with high resolution green monitor | £445.00 |
| ACH005 | BBC MASTER COMPACT COLOUR As above with RGB medium res colour monitor with video composite | £545.00 |
| ACH011 | TURBO UPGRADE for MASTER 128 65C102 co-processor 4MHz - 64K ram extra high basic, high editor | £99.00 |
| ACH012 | 512K MSDOS for MASTER IBM compatible DOS plus 8186 processor | £189.00 |
| ACH041 | UNIVERSAL 2nd PROCESSOR Allows both the turbo upgrade and the 512K upgrade to be run on the BBC Model B or B+ | £75.00 |
| ACH015 | 1770 DFS KIT for BBC B Allows BBC to access disc drives Allows you to use ADFS as well | £41.00 |
| ACH016 | ADFS ROM for 1770 or BBC B+ Gives 720K per disc | £24.00 |
| ACH020 | 32016 CO-PROCESSOR 32 bit processor - Complete with Fortran, Pascal, Cambridge Lisp, C Basic and 32016 assembler | £999.00 |
| ACH021 | ACORN CAMBRIDGE WORK STATION 4MB work station with 32016 co-processor | £3400.00 |
| ACP003 | MEGAMOUSE High quality UK manufactured - Slip free rubber coated ball - Fully AMX compatible | £49.00 |
| ACH034 | ACORN MUSIC 500 | £49.00 |

ECONET

| | | |
|--------|---|----------|
| ACH006 | ECONET BBC MASTER ET 128 No DFS Econet station with 128K memory | £300.00 |
| ACH007 | ECONET KIT Upgrades for BBC B or BBC B+ | £55.00 |
| ACH008 | ECONET STARTER KIT | £79.00 |
| ACH009 | ECONET SOCKET KIT | £29.00 |
| ACH010 | ECONET MODULE Upgrade cartridge for Master 128 | £43.00 |
| ACH022 | ECONET 10 STATION LEAD SET | £25.00 |
| ACP006 | PRINTER SERVER EPROM Allows BBC machine to be a printer server station | £39.00 |
| ACH031 | WINCHESTER 30MB (ACORN) with LEVEL 3 FILE SERVER | £1449.00 |
| ACH039 | FILESTORE E01 Stated alone twin floppy file server unit Contains clock box, terminator, etc. | £819.00 |
| ACH040 | FILESTORE E20 20MB hard disk for use with Filestore E01 | £709.00 |

DISC DRIVES

| | | |
|---|---|---------|
| All Peartree Disc Drives have a two year warranty by Akhter Computers | | |
| ACH026 | SINGLE 40/80 DRIVE, NO PSU 400K MITSUBISHI | £119.00 |
| ACH027 | SINGLE 40/80 DRIVE inc. PSU 400K MITSUBISHI | £135.00 |
| ACH028 | DUAL 40/80 DRIVE, NO PSU 800K MITSUBISHI | £229.00 |
| ACH029 | DUAL 40/80 DRIVE, inc. PSU 800K MITSUBISHI | £269.00 |
| ACH030 | DUAL 40/80 DRIVE IN MASTER BRIDGE MITSUBISHI | £289.00 |
| ACH032 | WINCHESTER 20MB & 400K DRIVE In monitor bridge for Master - Built in fan and power supply - Other sizes for hard discs are available, please call | £766.00 |

PLEASE USE OUR CODES WHEN ORDERING

MODEMS

| | | |
|--------|--|---------|
| ACS075 | COMMSTAR II Now compatible with Master 128 | £29.95 |
| ACP014 | PACE NIGHTINGALE 1200/75/75/1200/300/300 baud rates - BT approved complete with cables - Includes Comstar II | £99.00 |
| ACP015 | PACE NIGHTINGALE COMBO As above with Comstar software | £129.00 |
| ACP020 | WS3000V21/V23 MODEM Hayes compatible | £285.00 |
| ACP021 | WS4000 SCHOOLS MODEM Autodial, autoanswer - Schools approved | £159.00 |
| ACP029 | VOYAGER MODEM | £59.00 |
| ACP031 | BBC MICRO VIEWDATA | £49.00 |

COMPONENTS

| | | |
|--------|--|--------|
| ACP007 | EPROM 27256 32K 32K eprom | £4.95 |
| ACP008 | EPROM 27128 16K 16K eprom | £3.95 |
| ACP010 | 8K RAM CHIP Low power ram chips used in sideways runs | £3.50 |
| ACP012 | EPROM ERASER WITH TIMER | £29.95 |
| ACP013 | EPROM BLOWER Will program 2764, 27128, 27256 and 27513 | £69.00 |
| ACP023 | ACORN BBC B KEYBOARD | £49.00 |
| ACP027 | ACORN 8271 AND TTL Complete DFS kit | £49.00 |
| ACP028 | BBC B+ AND BBC B IBM LOOKALIKE CASE | £99.00 |
| ACP033 | BBC MASTER DUST COVER | £4.50 |
| ACP034 | BBC B DUST COVER | £4.50 |

The Acorn Music 500 SYNTHESISER

Now available from Peartree the Acorn Music 500 for the BBC, BBCB+, Master 128
£49.00 excluding VAT.
only from PEARTREE ▶ ACH034

SOFTWARE

| | | |
|-------------------|---|--------|
| Computer Concepts | | |
| ACS002 | WORDWISE PLUS Mode 7 editing, preview in mode 0 - Multi document editing | £45.00 |
| ACS003 | INTER SHEET 40, 80 and 105 column mode multiple spreadsheet | £42.00 |
| ACS004 | INTER CHART Built in Epson screen dump - Supports pie, line & bar charts | £30.00 |
| ACS005 | INTER WORD 80 or 105 column word processor - Continuous documents | £42.00 |
| ACS006 | INTER BASE Compatible with all filing systems - Card index mode, contains powerful Basic like programming language | £50.00 |
| ACS033 | SPELLMASTER | £50.95 |
| ACORNSOFT | | |
| ACS012 | VIEW 3.0 Industry's standard word processor - For the BBC B, B+, 6502 compatible - Including printer driver generator | £53.00 |
| ACS013 | VIEWSHEET Acornsoft standard spreadsheet | £36.00 |
| ACS014 | VIEWSTORE Complete with report generator Data can be imported from other view products | £37.00 |
| ACS015 | VIEWSPELL Spelling checker for View with 70,000 words | £32.00 |
| ACS016 | VIEWPLOT Enables you to draw lines, pie graphs Compatible with Viewsheet | £24.00 |
| ACS017 | VIEWINDEX Automatically creates indexes, notes, page numbers | £13.00 |
| ACS018 | VIEW PRINTER DRIVER GENERATOR Used to personalise View documents with special features | £9.00 |

SOFTWARE

| | | |
|--------|---|--------|
| ACS181 | OVERVIEW Includes all View family software | £86.00 |
| ACS181 | OVERVIEW For the MASTER series only - Includes Viewplot, Viewstore, Viewspell, Viewindex and the View Printer Driver Generator | £86.00 |
| ACS020 | ISO PASCAL Full implementation of the ISO standard | £52.00 |
| ACS053 | ISO PASCAL S.A.G. DISC Generate stand alone code | £29.00 |
| ACS021 | LOGO Good intro. for children with total graphics support | £52.00 |
| ACS022 | TERMINATOR Terminal emulator enables the host computer to be sent directly to the BBC's output driver | £29.00 |
| ACS023 | COMAL Programming language standard in many European countries | £39.00 |
| ACS024 | BASIC EDITOR Powerful screen basic editor | £25.00 |
| ACS025 | MICRO PROLOG | £60.00 |
| ACS026 | BCPL ROM | £49.00 |
| ACS027 | BCPL CALCULATION | £29.00 |
| ACS028 | BCPL STAND ALONE GENERATOR | £39.00 |
| ACS054 | FORTH ROM | £39.00 |
| ACS055 | FORTH DISC | £14.95 |
| ACS056 | MASTER LISP C-ROM | £49.00 |
| ACS058 | MASTER LOGO C-ROM | £52.00 |
| ACS059 | 6502 DEVELOPMENT PACK DISC | £39.00 |
| ACS060 | GXR for MODEL B | £23.00 |
| ACS061 | GXR for MODEL B+ | £23.00 |
| ACS031 | DOS COPY BBC/MS-DOS BBC MSDOS copies to or from many IBM MSDOS disc formats - Requires 1770 based DFS | £14.95 |
| ACS032 | CPMBEEB BBC/CPM | £14.95 |
| ACS038 | AMX MOUSE AND SUPERART | £65.00 |
| ACS039 | AMX DESK | £19.00 |
| ACS040 | AMX UTILITIES | £11.50 |
| ACS041 | AMX SUPERART | £43.00 |
| ACS042 | AMX PAGEMAKER | £43.00 |
| ACS043 | AMX 3D ZICON | £21.00 |
| ACS044 | AMX DATABASE | £21.00 |
| ACS045 | AMX XAM | £21.00 |
| ACS046 | AMX MAX | £17.00 |
| ACS047 | THE ARTIST SOFTWARE | £39.00 |
| ACS048 | ARTIST AND MEGAMOUSE | £79.00 |
| ACS050 | ADVANCED DISC INVESTIGATOR Powerful disc utility - Back up most protected discs - Check and repair faulty tracks - Compatible with the BBC B, B+ and the Master | £22.50 |
| ACS075 | ADVANCED 1770 DFS Turn our RAM cartridges into RAM disc - 62 file catalogue - 640K disc capacity | £27.50 |
| ACS051 | ADVANCED DISC TOOLKIT Compatible with all Acorn products 35 extra commands ADFS formatter and back up plus many more powerful utilities | £27.50 |
| ACS052 | MUSIC 500 SOFTWARE Ample software with full manual | £9.95 |

MONITORS COLOUR

| | | |
|-------------------|---|---------|
| MON002 | MICROVITEC 1451 COLOUR MON MED Medium res monitor - Metal or plastic case, please state when ordering - RGB interface | £249.00 |
| MON003 | MICROVITEC 1451 A/P COL MON MED As above with audio and composite video input | £279.00 |
| MON004 | MICROVITEC 1441 MON COL HIGH Very high resolution monitor - 895 pixels - RGB interface | £449.00 |
| MON005 | TAXAN SUPER VISION 625 COL HIGH 12" super high resolution colour monitor - 4 unique text modes - Front monochrome text switch - 640 x 262 line resolution | £349.00 |
| MON006 | PHILIPS CM8833 COLOUR MONITOR 14 inch medium resolution monitor - RGB/RGB TTL | £273.86 |
| MON007 | PHILIPS CM8852 COLOUR MONITOR 14 inch medium/high resolution - RGB/RGB | £299.00 |
| MONOCHROME | | |
| MON009 | KAGA KX 117 GREEN MONITOR P31 | £89.00 |
| MON010 | KAGA KX 118 GREEN MONITOR Clearly exceptional on BBC text | £99.00 |
| MON011 | KAGA KX 119 AMBER MONITOR (PUL) | £99.00 |
| MON012 | PHILIPS GREEN MONITOR | £79.00 |

Many other monitors are in stock. We can supply, please call for prices and deliveries.

PRINTERS

| | | |
|--------|---|---------|
| PRT001 | EPSON LX86 PRINTER 120CPS - NLQ mode - Centronics interface | £199.00 |
| PRT002 | EPSON FX800 19 pin dot matrix - 180 CPS draft mode, 35 CPS NLQ mode - 8K buffer - Parallel interface standard - 80 column | £399.00 |
| PRT003 | EPSON FX1000 19 pin dot matrix - 200 CPS draft mode, 35 CPS NLQ mode - 8K buffer - Parallel interface standard - 136 column | £499.00 |
| PRT004 | EPSON LQ800 PRINTER 24 pin dot matrix - 180 CPS draft mode, 60 CPS NLQ mode - 7K buffer - Parallel interface standard - 80 column | £499.00 |
| PRT005 | EPSON LQ1000 PRINTER 24 pin dot matrix - 180 CPS draft mode, 60 CPS NLQ mode - 7K buffer - Parallel interface standard - 136 column | £699.00 |
| PRT008 | MP 165 PRINTER 165 CPS draft mode, 40 CPS NLQ mode - 2K buffer - Centronics interface - Built in tractor feed - Epson compatible | £199.00 |
| PRT011 | JUKI 6100 PRINTER 18 CPS daisy wheel printer - Standard ribbons - Centronics interface | £299.00 |
| PRT021 | PANASONIC KX-P1081 DOT MATRIX PRINTER Fast draft printing at 120 CPS Excellent Near Letter Quality font at 24 CPS | £147.00 |
| PRT014 | EPSON LX TRACTOR FEED | £22.00 |
| PRT016 | EPSON LX CUT SHEET FEEDER | £59.95 |
| PRT023 | EPSON LQ1000 TRACTOR FEED | £50.00 |
| PRT024 | EPSON LQ1000 CUT SHEET FEEDER | £130.00 |
| PRT025 | EPSON FX80+ CUT SHEET FEEDER | £129.95 |

Please Note
We have many other makes of printers in stock such as Always call for availability.

LEADS

| | | |
|--------|--|--------|
| LDS001 | BBC TO TV LEAD | £1.25 |
| LDS002 | BBC TO GREEN MONITOR LEAD | £2.95 |
| LDS003 | BBC TO SONY/KAGA COLOUR MONITOR | £5.95 |
| LDS004 | BBC TO MICROVITEC LEAD | £2.20 |
| LDS005 | PHONO TO PHONO LEAD | £1.25 |
| LDS006 | BNC TO BNC | £2.95 |
| LDS007 | BBC TO CASSETTE | £2.25 |
| LDS008 | BBC TO ACORN CASSETTE LEAD | £2.25 |
| LDS009 | BBC TO CENTRONICS | £9.95 |
| LDS010 | BBC TO SERIAL PRINTER | £9.95 |
| LDS011 | 4 WAY MAINS TRAILING SOCKET | £9.50 |
| LDS012 | CABLE FOR MODEM | £4.95 |
| LDS014 | MASTER COMPACT PRINTER LEAD | £15.95 |

BOOKS

| | | |
|--------|--|--------|
| MIS012 | BBC MASTER REFERENCE GUIDE PT1 | £14.95 |
| MIS013 | BBC MASTER REFERENCE GUIDE PT2 | £14.95 |
| MIS014 | VIEW MANUAL (BBC) | £10.00 |
| MIS015 | VIEWSHEET MANUAL | £10.00 |
| MIS019 | VIEWSTORE MANUAL | £10.00 |
| MIS016 | DFS OPERATING SYSTEM MANUAL | £6.95 |
| MIS017 | BBC USER GUIDE | £14.95 |
| MIS024 | BBC ADVANCED USER GUIDE | £16.95 |
| MIS018 | ADVANCED SIDWAYS RAM USER GUIDE | £9.95 |

PRINTER RIBBONS


| | | |
|--------|---|--------|
| MIS005 | RIBBON FOR MX FX80 & JUKI 5510 | £4.50 |
| MIS006 | RIBBON FOR LX80 LX86 | £4.50 |
| MIS007 | RIBBON FOR MP165 | £5.00 |
| MIS008 | RIBBON KAGA KP810/CANON PW1 | £5.95 |
| MIS009 | RIBBON FOR EPSON FX RX/100 | £7.95 |
| MIS034 | RIBBON FOR EPSON LQ800 | £11.95 |
| MIS023 | RIBBON FOR CPA80 | £3.50 |

All prices are exclusive of VAT.

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF

PEARTREE PRODUCTS

| | | |
|--------|--|---------------|
| PEP001 | PEAR 1 ROM CARTRIDGE Add 32K rom to your Master | £8.95 |
| PEP002 | MR6000 MASTER CARTRIDGE Add 64K rom to your Master | £11.95 |
| PEP003 | MR7200 MASTER RAM CARTRIDGE Add 32K ram to your Master | £29.95 |
| PEP019 | MR8000 MASTER RAM CARTRIDGE Add 64K ram to your Master Battery backed up Battery life five years | £39.95 |
| PEP023 | MR4800 RAM BOARD RAM board for the BBC Model B 128K RAM Battery backed up Small, easy to fit, complete with utility software Includes write protect switch, battery included | £59.95 |
| PEP004 | MR3000 ROM BOARD Still going strong. This has proved to be a very popular mini rom board for the BBC Model B Add 4 extra rom sockets | £15.95 |
| PEP005 | MR4200 RAM BOARD Add 32K of sideways ram and 3 extra rom sockets. Includes write protect switch | £29.95 |

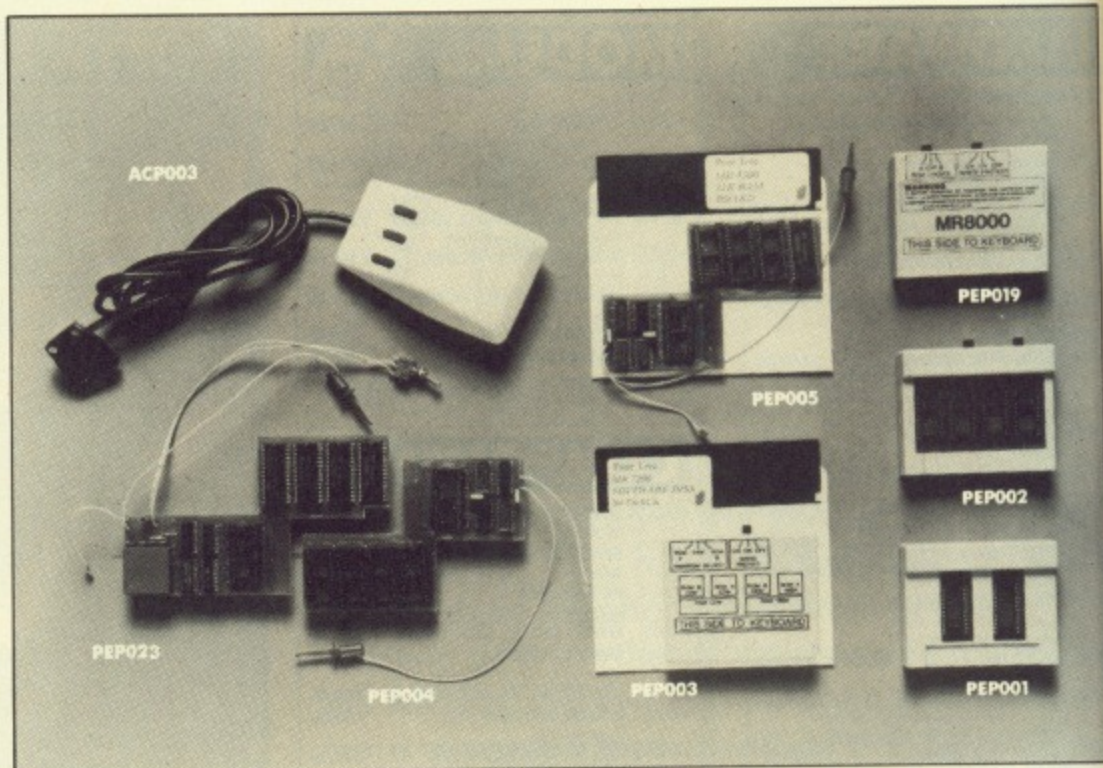

| | | |
|--------|---|---------------|
| PEP010 | DISCS DS/DD 5.25 96 TPI Life time guarantee Reinforced hub | £13.50 |
| PEP011 | DISCS DS/DD 3.5 Double sided Suitable for the Master Compact | £26.00 |

Archimedes



The ARCHIMEDES High Performance Computer Systems represent a considerable lead in performance, but how has this performance been put to use in the range of products?

The ARCHIMEDES range includes the 300 Series and the more sophisticated 400 Series.

All machines have features in common:

- 32 bit RISC technology;
- ergonomically styled in a 3 box presentation;
- 'IBM enhanced' style keyboard with 3 button mouse;
- British Broadcasting Corporation Micro style operating system (ARTHUR);
- BB BASIC V;
- interfaces; printer, serial, monitor, stereo sound;
- ECONET plug-in option;
- a variety of podules can be fitted.

THE 300 SERIES

The 300 Series, identified by its red function keys,

The NEW High Performance 32 Bit Risc Processor from Acorn

consists of two models, ARCHIMEDES 305 with 0.5 Mbyte of RAM and ARCHIMEDES 310 with 1 Mbyte of RAM. These machines are the latest generation of British Broadcasting Corporation Micros. They offer, at low cost, all the basic features with expansion capabilities. Both machines have a 512 Kbyte ROM and a 1 Mbyte (unformatted) 3 1/2" disc drive.

THE 400 SERIES

The more powerful 400 Series offers considerably increased expansion capabilities. These machines are the new range of Acorn Computers.

The ARCHIMEDES 410 has 1 Mbyte of RAM; 1 Mbyte (unformatted) 3 1/2" disc drive; a hardware floating point unit option; a co-processor bus; a hard disc controller; a four socket back plane; 512 Kbytes of ROM.

At the top of the range is ARCHIMEDES 440. This machine possesses all the features of the 410 as standard, with the adoption of 4 Mbytes of RAM and a 20 Mbyte hard disc.

ARCHIMEDES is an open system and its flexibility is achieved by fitting any of the following podules (peripheral modules) via a back plane:

- hard disc controller (300 Series only);
- ROM extension board;
- MIDI music interface;
- MS-DOS co-processor;
- SCSI;
- hardware floating point unit;
- Ethernet podule.

Third party suppliers will be meeting other user requirements.

300 SERIES

| | | |
|-------------|---------------|--------------|
| A305 SYSTEM | BASIC | £799 |
| | MONO | £849 |
| | COLOUR | £999 |
| A310 SYSTEM | BASIC | £875 |
| | MONO | £925 |
| | COLOUR | £1075 |

400 SERIES

| | | |
|-------------|---------------|--------------|
| A410 SYSTEM | BASIC | £1399 |
| | MONO | £1449 |
| | COLOUR | £1599 |
| A440 SYSTEM | BASIC | £2299 |
| | MONO | £2349 |
| | COLOUR | £2499 |

We accept Barclaycard/Visa/Access/Mastercard/postal orders or cheques. We accept government and educational orders. Leasing available, please apply for written details.

You may purchase any of the items listed, by cheque made payable to
PEARTREE COMPUTERS LTD.

All you have to do is to list your requirements on a sheet of paper, post it to us quoting ref, and we will despatch your goods within 24 hours, whenever possible.

Please add the following amounts for postage and packing:

| | |
|---------------------|-------------------|
| Items below £10.00 | add £1.50 |
| Items below £50.00 | add £2.50 |
| Items below £100.00 | add £3.50 |
| Items over £100.00 | add £10.00 |

Independent courier for items over £100.00


All prices exclude VAT.

Access/Barclaycard holders—call us on our new special line: **(0480) 50595**

Prices are correct at time of going to press. Peartree Computers reserves the right to change prices without prior notice.

**OVER
£500
IN PRIZES**

**WIN A ROM BOARD
PACKED WITH ROMS!**

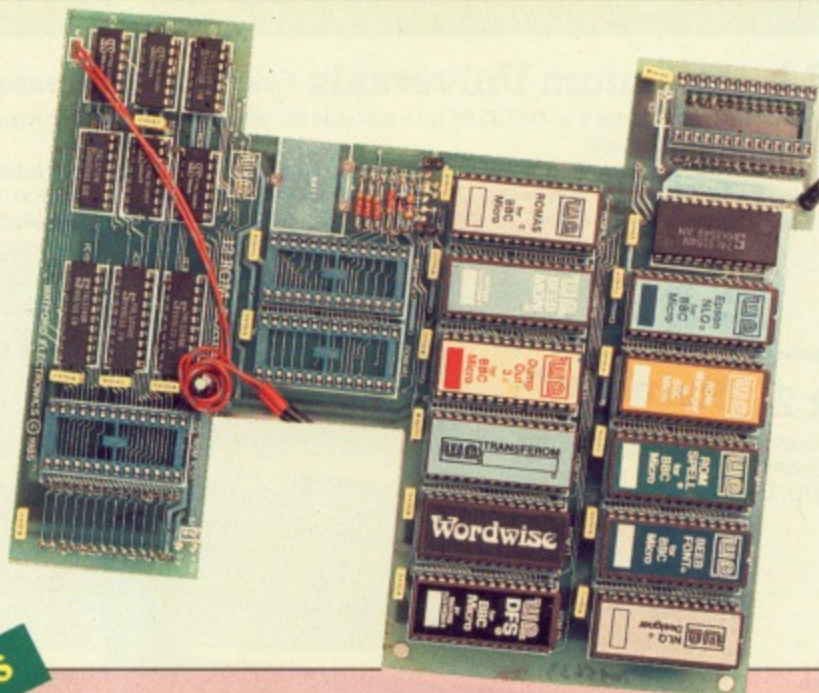

Watford Electronics has grown over the years to become a major force in the BBC Micro market. This year Watford celebrates its 15th birthday and is asking you to help celebrate the occasion in style.

To this end we have devised an exciting Birthday Competition.

THE PRIZES

**1st
worth
£350**

The Solderless Sideways Rom Socket Board – designed to slot straight into your BBC Micro with ease. And to make the prize even better Watford has filled 11 of the 16 sockets with roms. Here's what's been included:

- * Epson NLQ
- * Rom Manager
- * Rom Spell
- * Beeb Font
- * NLQ Designer
- * Romas
- * Beebmon
- * Dump Out 3
- * Wordwise Plus
- * Transferom
- * Watford DFS

WHAT YOU HAVE TO DO

Simply answer the following questions and return them to The Micro User by November 7. The winners will be the first three correct entries pulled from the bag.

QUESTIONS

1. Who is managing director of Watford Electronics?
2. Who is the author of Wordwise Plus?
3. What does ZIF stand for?
4. Which dates does the sign of the ram fall between?

**2nd
worth
£121**

Rom/Ram Card with 128k ram PLUS RomSpell

**3rd
worth
£36**

Watford Solderless Sideways Rom Socket Board

To add that extra special touch, the three winners will receive free tickets to the 17th Micro User Show where they will be presented with their prizes by Watford Electronics and have their pictures taken for posterity.

ANSWERS

1 _____

2 _____

3 _____

4 _____

Name _____

Address _____

Postcode _____

Send to: Watford Birthday Competition, The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Cut Price Disks from Direct Disk Supplies

from only £10.99 for 20 disks delivered to your door.



Cash 'n Carry prices on disks from Direct Disk Supplies

OFFER 1 Premium Universals One disk for all reasons!

The Premium Universal disk tested to DSDD 96tpi - suitable for all drives needing high quality media. (SSDD, DSDD 40/80 track)

| | |
|------------|---------|
| 25 disks | £ 14.99 |
| 50 disks | £ 27.99 |
| 100 disks | £ 49.99 |
| 200 disks | £ 96.99 |
| 250 disks | £119.99 |
| 500 disks | £229.99 |
| 1000 disks | £399.99 |

Packed in 25's, complete with envelopes, labels, WP tabs and hub-rings. Disks individually certified and tested (on both sides) to 96tpi means no problems and higher reliability. Lifetime Warranty.

ALL PRICES INCLUDE VAT & DELIVERY TO YOUR DOOR! NO HIDDEN EXTRAS

OFFER 2 Rainbows

Sets of 5 colours in each pack. Universal coloured disks to code your files and programs. Without doubt the best value coloured disks on the market. (SSDD, DSDD 40/80 track)

| | |
|------------|---------|
| 25 disks | £ 18.99 |
| 50 disks | £ 35.99 |
| 100 disks | £ 69.99 |
| 200 disks | £129.99 |
| 250 disks | £149.99 |
| 500 disks | £279.99 |
| 1000 disks | £499.99 |

Packed in 25's, complete with envelopes, labels, WP tabs and hub-rings. Disks individually certified and tested (on both sides) to 96tpi means no problems and higher reliability. Lifetime Warranty.

OFFER 3 Flippies

This is the disk for turning! Reversible disk tested both sides. 2 notches and 2 index holes. Ideal for BBC, APPLE, Commodore etc.

| | |
|------------|---------|
| 25 disks | £ 18.99 |
| 50 disks | £ 35.99 |
| 100 disks | £ 69.99 |
| 200 disks | £129.99 |
| 250 disks | £149.99 |
| 500 disks | £279.99 |
| 1000 disks | £499.99 |

Packed in 25's, complete with envelopes, labels, WP tabs and hub-rings. Disks individually certified and tested (on both sides) to 96tpi means no problems and higher reliability. Lifetime Warranty.

OFFER 4 HIgrade Doubles & PC Preformatted

| | HIgrade Doubles | PC Formatted |
|------------|-----------------|--------------|
| 25 disks | £ 12.99 | £ 18.99 |
| 50 disks | £ 23.99 | £ 35.99 |
| 100 disks | £ 45.99 | £ 69.99 |
| 200 disks | £ 89.99 | £129.99 |
| 250 disks | £105.99 | £149.99 |
| 500 disks | £199.99 | £279.99 |
| 1000 disks | £359.99 | £499.99 |

Premium quality, individually certified to DS 48tpi. Made for the PC, giving premium quality at budget prices.

Why not spoil yourself, and buy them formatted - a little extra saves a lot! There's never a disk formatted when you need it.

OFFER 5 Bargain Box

Price per order qty. Approx price per disk ex-VAT (infor only)

| | | |
|------------|---------|-----|
| 20 disks | £ 10.99 | .48 |
| 40 disks | £ 19.99 | .44 |
| 60 disks | £ 28.99 | .42 |
| 80 disks | £ 36.99 | .40 |
| 100 disks | £ 42.99 | .38 |
| 200 disks | £ 82.99 | .36 |
| 500 disks | £199.99 | .35 |
| 1000 disks | £389.99 | .34 |

Branded SCOTCH (made by 3M) SSDD 48tpi at prices below other people's plain label. Certified error free and tested by 3M; disks have hub-rings, tyvek envelopes and labels. Stocks are decreasing rapidly, these have been extremely popular.

OFFER 6 - 3.5" Media Life Disks

| Qty | SS | DD |
|------|---------|----------|
| 10 | £ 13.99 | £ 15.99 |
| 20 | £ 26.99 | £ 29.99 |
| 50 | £ 64.99 | £ 73.99 |
| 100 | £119.99 | £ 139.99 |
| 200 | £229.99 | £ 269.99 |
| 250 | £279.99 | £ 329.99 |
| 400 | £429.99 | £ 519.99 |
| 500 | £499.99 | £ 599.99 |
| 1000 | £949.99 | £1099.99 |

NEW LOWER PRICES
3.5" disks in plastic library boxes.

Made by a leading manufacturer, all our disks are individually certified to 135tpi. Don't forget the price includes VAT, delivery and library boxes!

Same day despatch - at no extra cost

OFFER 7 3M & Verbatim

| | |
|---------------------|-----------------|
| 5.25" disks 3M/Verb | |
| SSDD 48tpi 744/525 | 20 disks £25.99 |
| DSDD 48tpi 745/550 | 20 disks £29.99 |
| DSDD 96tpi 747/557 | 20 disks £37.99 |
| DSHD 96tpi 799/HD | 20 disks £49.99 |

| | |
|-------------------|-----------------|
| 3.5" disks | |
| SSDD 135tpi | 20 disks £39.99 |
| DSDD 135tpi | 20 disks £49.99 |
| DSDD High Density | 10 disks £49.99 |

Includes VAT and delivery.

Brand Leaders at Cash 'n Carry prices

If these are your favourite, then don't miss our CRAZY low prices for 20 disks. Remember there's no extras, just terrific value.

OFFER 8 HI-flyers

PC-AT High Density Disks made by one of our major manufacturers. Suitable for PC-AT and other High Density drives. Lifetime warranty.

Total price (no extras)

| | |
|-----------|---------|
| 20 disks | £ 32.99 |
| 40 disks | £ 62.99 |
| 60 disks | £ 89.99 |
| 80 disks | £119.99 |
| 100 disks | £139.99 |
| 200 disks | £259.99 |
| 500 disks | £599.99 |

OFFER 9 3" CF2 disks

Maxell or Panasonic 3" CF2 disks

| | |
|-----------|---------|
| 10 disks | £ 25.99 |
| 20 disks | £ 49.99 |
| 50 disks | £109.99 |
| 100 disks | £209.00 |

VAT & carriage included.

OFFER 10 Box Clever

Safe! Clean! Tidy!

Sixers - 6 stylish plastic library cases for 10 disks. VAT & carriage included.

| | |
|-----------------|-------|
| 3.5" Slimpak | £8.99 |
| 5.25" Vision-10 | £8.99 |

Lockable Boxes

| | |
|----------------------------|--------|
| 3.5" TDS040 40/50 disk box | £ 9.99 |
| TDS080 80/90 disk box | £12.99 |
| 5.25" TDS050 50 disk box | £ 9.99 |
| TDS100 100 disk box | £12.99 |
| IBM parallel printer cable | £9.99 |

How to order

1. DIAL-A-DISK ON 01-979 7811, and give your ACCESS or VISA number and expiry date.
2. Send your cheque etc. to Direct Disk Supplies Ltd.
3. Official Orders, Bona-fide orders from Universities, Colleges, Schools, Charities, etc are very welcome.
4. Cash orders, no minimum value. Account orders, minimum value £50.



Direct Disk Supplies Ltd.

Dept MU11, FREEPOST, 129 High Street, Hampton Hill, Middlesex TW12 1BR



Rings around Mode 2

Ian Waugh finds out how to get more colour from your micro

THERE are probably 101 reasons why you bought a BBC Micro but it is unlikely to be because of the fantastic range of on-board colours. The graphic facilities are good but eight colours is hardly generous. So if you want more hues and tints than just primary and complementary colours what do you do?

The simple answer is to buy an Archimedes (I'm saving) but if your budget doesn't stretch that far you may be interested in the SPX system – or Saturn Palette Extension to give it its full title.

This is a plug-in board which fits inside your BBC Micro and gives access to 4096 colours. The actual number of colours you can have on screen at any one time is still determined by the mode, for example in Mode 2 you can have 16 colours and none of them need flash.

There are two SPX boards to accommodate BBC B and Master computers. The BBC B board plugs quite simply into the Video ULA chip. In the Master this chip is soldered in and instead the board plugs into Rom socket 8. The fitting instructions are clear but you must accept certain restrictions. For example, it fits over IC38 (where my write protect switch used to fit) and a flying lead plugs into the Econet board connector. A couple of DIL sockets on flying leads clip over a couple of other ICs, too.

You also need a monitor with linear RGB inputs. This includes nearly all modern monitors although Microvitecs (and some others) only have digital RGB inputs and require internal link changes for use with the SPX system. Saturn Computers will advise and supply correct connectors for your system.

SPX works by mixing red, green and blue in various intensities, from 0 to 15, giving you 16 x 16 x 16 or 4096 colours. The *SETCOL command is used like this:


```
*SETCOL 28 (15,1,0)
```

This would set colour 28 to dark orange. To get you started, 32 colours have already been defined and can be set by name, for example:

```
*SETCOL 28 DARKORANGE
```



Stryker's Run
(with new colours)

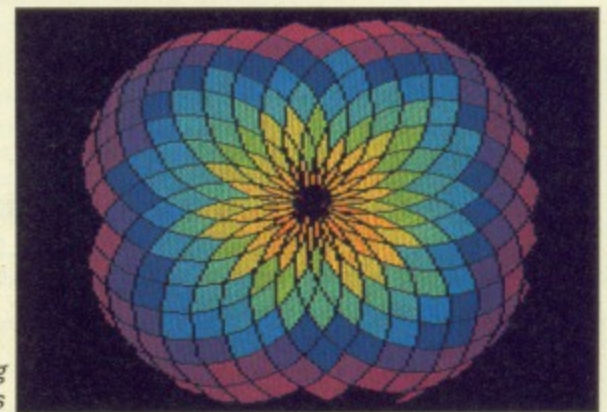

Pattern showing
new colours

The *SPREAD command mixes two colours and sets the colours in between to shades of the mixed colour. This helps you to choose the exact shade of a colour you require.

VDU19 can be used, too, and commands can be used from machine code via OSWRCH. The *ON command intercepts VDU19 calls and the following line performs the same function as the examples above:

```
VDU19,28,DARKORANGE,0,0,0
```

You can also specify the RGB intensities from VDU19.

If a program lets you use * commands, you'll be able to use the SPX software. Protected programs and programs which don't give you access to * commands can have colours set prior to loading.

A set of 16 colours is called a palette or map and you can define up to seven of them with *SPXMAP. *SETCOL can be used to set colours in several maps at once. In this example:

```
*SETCOL 1 PINK/KHAKI/
```

colour 1 is set to pink when maps 0, 1 and 2 are shown and to khaki when maps 3 and 4 are shown. *FLASH is used

to set the length of time a map will be displayed on screen. The colours must be set up first as shown above and you can create some very clever effects with this switching method. The manual uses a simple traffic light display as an example.

There are other commands to let you cycle through the colours and list the palettes.

The only major restriction in the system regards changing the colour black. It may not be possible or it may have unpredictable effects – and it does, especially in Mode 7.

Software and hardware should be available soon to provide four palettes of four colours which can be switched at the end of a single line scan giving four colours in Mode 0 and 3. It is expected to cost around £20.

I have been using the Master version of the board for several weeks and the software works very well indeed. The display is slightly duller than that provided by the micro's own RGB output and this may vary from monitor to monitor.

Also, after the computer had been on for several hours, the colours would

Turn to Page 135 ►



**QUALITY HARDWARE AND FIRMWARE
FOR ACORN MASTER AND BBC
COMPUTERS**

We have pleasure in listing below our products for Acorn computers. All items are the result of careful design and clever programming, enhancing our reputation for high-quality accessories and value-for-money.

ACORN MASTER

The MASTER REPLAY tape to disc utility is packed full of useful features and cannot be surpassed for its efficiency and ease of use. Built-in formatting, verification and automatic file creation with the saving of as much memory as required into a maximum of 22 files per disc, are only some of the facilities included. Operated by single key presses and a built-in switch the system is invisible when not in use. 'Anti-piracy encoding' restricts REPLAY discs to personal use. Available as self-contained, or as an add-on to the ROMBOARD '3'.

***MASTER REPLAY (Self-contained) – £41.95**

***MASTER REPLAY (Add-on) – £36.95**

The MASTER to 'B' conversion kit enables most BBC 'B' tapes to be used and transferred to disc on the Master (M/REPLAY must be present).

MASTER/B conversion kit – £14.95, (state which M/REPLAY).
Use the ROMBOARD '3' to overlay up to three extra ROMs in place of the unused built-in ROM software. Optional switches (extra) can be used to change over as required.

***ROMBOARD '3' – £19.95.**

Switches: 1–£2.00, 3–£4.00

***IMPORTANT** – Because all the above products require the 1Mbit ROM (IC24) to be extracted please ensure that this ROM is not soldered into the baseboard.

N ROMBOARD '4' may be used instead of, or in addition to, ROMBOARD '3'.
E Up to four new ROMs can be supported, 'over-laying' the RAM banks or
W cartridge slots, various combinations may also be set by links. This board incorporates a built-in read/write-protect switch for the RAM banks.

ROMBOARD '4' – £29.95

Independent write-protect switch for one or both RAM banks.

WRITE-PROTECT SWITCH – £8.95

BBC 'B' and 'B+'

The REPLAY System for tape to disc transfer is still the market leader. Easy-to-use routines allow the saving of memory to disc. Extra features allow a screen display to be printed through a suitable printing program, there is a pause facility and mid-play stop and save. Anti-piracy encoding restricts discs to personal use. Versions available to suit all popular disc interfaces.

BBC REPLAY – £35.00

(Please state which disc interface is fitted).

The B+ to B conversion kit expands the number of tape programs available to the B+ user. A board carrying the O.S.1.20 ROM is plugged into the computer and a switch allows selection of normal or 'B' mode.

**'B+ to B' Conversion – £25.95,
or without O.S. ROM – £15.95**

SPECIAL OFFER

PC COMPATIBLE

with 512K RAM, Single Floppy Disk,
20Mb Hard Disk, Mono Screen + KBD

**All for the low price of
£750.00**

All products fully documented

No soldering or track-cutting required

Step-by-step instructions allow easy home installation

Prices include VAT, also postage when ordered direct

Any item may be ordered through your own Dealer

Further details of any product sent on request

**VINE MICROS,
MARSHBOROUGH, Nr. SANDWICH,
KENT CT13 0PG.
Tel.: 0304 812276**



Britain's best-selling computer magazines!



The Micro User



Electron User



Apple User



Atari ST User



Atari User



Amstrad Computer User



Amstrad PCW



Amstrad Professional Computing



Computing with the Amstrad CPC



Computing with the Amstrad PCW



PC Amstrad

**On sale NOW at your
newsagents or call**



**Diamond-
Europress
0424 430422/422928**

dither a little and sometimes a colour would break into two, a strange effect – interesting but odd – but easily settled by resetting the colour with *SETCOL.

There's no doubt that the SPX board is great fun and with a little ingenuity the palette switching effects could be used to produce some amazing animated displays. The tragedy is the results can only be displayed on another computer with an SPX board so you can't even send your creations in to our Gallery pages.

If you are an artist or have felt the acute limitations of the BBC Micro's eight colours, the Saturn Palette Extension could put a little more life into your screen displays. It's either that or an Archimedes.

Ian Waugh

Product: Saturn Palette Extension Board
 Supplier: Saturn Computers, Flat 1, 12 Avenue Road, Darlaston, W. Midlands, WS10 8AR.
 Tel: 021 526 6216.
 Price: Model B £63.19; Master £68.94.

STATUS COMMANDS

- *DIE SPX system off and prevent colour changes after break
- *ON Intercept VDU19, VDU20 and Mode changes
- *OFF VDU intercept off
- *SPXLIST List currently displayed map

COLOUR SETTING COMMANDS

- *CYCLE Rotate part or all of the colour palette
- *RECYCLE Rotate palette in opposite direction to *CYCLE
- *SETCOL Set logical colour to named colour
- *SPREAD Mix and display two colours

MULTIPLE MAP COMMANDS

- *FLASH Set duration of display of each map
- *SPXMAP Select map for use with *SPREAD, *CYCLE and VDU19 commands
- *SETCOL Set colours in several maps at once.
- *SPXSHOW Display map



BRITISH BROADCASTING CORPORATION
 MASTER SERIES MICROCOMPUTER



**Camelot
 Computer
 Services**

Camelot Computer Services,
 14 South View,
 Woodley, Stockport,
 Cheshire. SK6 1PD.
 Tel.: 061-494 2253
 (24 hr. telephone service)

**** TWO NEW DISC BASED 100% MACHINE CODE PRODUCTS ****

THE MENU – Two utilities in one, residing only in the !BOOT file on your discs, enabling single key loading of both BASIC and Machine Code files, whilst also allowing rom images to be created/loaded and displaying the Sideways ROM/RAM banks.

Disc: Displays both sides of disc on up/down scrolling window. Recognises BASIC and Machine Code programs automatically when loading. Handles multi-part programs with ease. Displays disc titles, *OPT settings, whether files are locked or not and on which drive they are held.

Roms: Shows contents of all sixteen ROM/RAM banks, which ones are empty and which ones are Sideways RAM. Can save ROM images to disc, load them back (into Sideways RAM) or execute operating system calls, e.g. *HELP.

WHAT THE !BOOT FILE WAS CREATED FOR–TAKE A 'LOAD' OFF YOUR MIND!!

THE LIST – Two utilities in one allowing a meaningful description to be entered against each of your files on DFS or ADFS discs and held in a data file for later use. An optional pre-formatted printout of the currently loaded data is possible. The program recognises whether you are in DFS or ADFS and acts accordingly.

Edit: Allows description of up to 39 characters for each file. Can be configured to read single or double sided drives on DFS (31 files per side) or whole directories (of 47 files maximum) on ADFS. In ADFS it can show your position in the current path from the root directory which you can move through with ease.

Print: Prints each filename with its description on most printers. The pre-formatted printout will put one drive per sheet on DFS and one directory on ADFS.

WHAT YOUR DISCS HAVE BEEN WAITING FOR–NOW RE 'DISC' OVER YOUR PROGRAMS

100% Machine Code for speed. Mode 7 display. Time and date displayed on the Master. Error trapping and on screen instructions as necessary.

ONLY £15.75 EACH incl. P&P

*'THE MENU' works with DFS only whilst 'THE LIST' also works with ADFS.
 Both are compatible with BBC B, B+ and Master Series Microcomputers.
 State system and 40/80 tracks – Trade and Export orders welcome.*

contex

computing

BANK MANAGER (for disc systems only)

The most advanced and versatile personal bank account management program available for all BBC computers. Consistently acclaimed!

"data entry is a delight... professional... excellent product" Micro User April 86
 Enter cheques and receipts. Standing Orders any frequency. Automatic date sequencing. Reconcile statements. Search, amend and delete. Unreconcile. Move forwards or backwards. Analyse expenditure. Forward cash flow forecast. Up to 36 simultaneous 'bank' (bank, credit, cards, savings, cash) accounts online simultaneously, inter-account transfers, 9999 standing orders, 99 analysis categories, 12 actual and 12 budgets per category, over 4,000 postings on an 80k disc. Reports to screen or printer. Graphics. Foreign currency support. Password. File recovery. Auto exec. file. Field editing. Itemised look ahead. Programmable report writer.

Standard Bank Manager for the BBC B, B+ £17.50

BANK MANAGER MASTER (for disc systems only)

Version 2 now available. Includes all of the facilities of the standard Bank Manager plus ADFS file system support, shadow screens, uses sideways RAM, 40 or 80 column screen reports, improved graphics, m/c windows, function key support and onscreen labels, additional functions added to the already extensive report facilities.

Bank Manager Master for the MASTER and MASTER COMPACT £22.50
 Upgrade from standard, return original disc and £6.00

BANK MANAGER BUSINESS UTILITIES (for disc systems only)

For the 'professional' who also uses the BANK MANAGER to control the business accounts the BUSINESS UTILITIES add double entry trial balance and programmable spreadsheet analysis reports. Generated from cheque and cash transactions keyed into BANK MANAGER. Just pass the reports to your accountant! Use with - either standard or master/compact version.

Bank Manager Business Utility Pack 1 £12.00

TYPING TUTOR

Quickly learn to touch type. Over 90 smoothly graded lessons graduate you from the basic home keys to complete keyboard mastery. Unique word scan line checking. Target WPM and percentage correct. You may revise the targets or lessons as required. Audio key click for positive key depression. Establish a typing rhythm using the automatic metronome. Free format option. Recommended.

for BBC B, B+, Master and Compact; Cassette £9.50, Disc £12.50

ALL PRICES FULLY INCLUSIVE, FREE POSTAGE WITHIN U.K. Enquiries and Access credit card orders telephone 023 03 347

CONTEX COMPUTING, 15 Woodlands Close,
 Cople, Bedford MK44 3UE



Please rush me..... for BBC: B B+ Master Compact

Cass 5.25" 3.5" 40k 80k

Enclosed £..... or debit my Access card no.....

Name.....

Address.....

MULTI
 FAST
 DELIVERY

**MICROS - MONITORS - DRIVES
PRINTERS - 8271/1770 & COMPONENTS**

VIGLEN CONSOLES - PC STYLE

BBC B Console £41.30 (c)
Master Console (Professional) ... £32.25 (c)
Supports Monitor, can enclose two drives

WINCHESTER - Fully compatible

Well known make-Phone, SAE Leaflet
(Master-Plug-n'-Go-B requires 1770 DFS
and/or ADFS)
20MB (ex VAT £491.30) £491.30 (d)
28MB (ex VAT £534.78) £534.80 (d)
UFD 2000 20MB Hard Drive +SW (400K)
Floppy+PSU & Monitor Bridge £759.00 (d)

5.25" 40/80 TRACK D/SIDED DRIVES

-new switched cased drives with leads
(Famous Japanese mechanisms)
SINGLE (400k) Prices £82.50 (c)
DOUBLE (800k) Slashed! £165.00 (c)
Master Bridge-Twin (800k) Drives
with PSU £188.95 (d)
5.25"+3.5" Combo with PSU £208.85 (c)
Single 3.5" (400k) with PSU £111.25 (c)
Double 3.5" (800k) with PSU £197.35 (c)

DFS KITS with fitting instructions

8271 DFS Kit (Inc DNFS Rom) ... £41.65 (a)
1770 (DFS without Rom) £32.00 (a)
Acorn ADFS with utilities £26.00 (a)

THIS MONTHS SPECIAL

1770 Kit (Inc Acorn Rom) £38.50 (a)
Package Price
Single (400K) Drive+ 1770 DFS £121.00 (c)
Double (800K) Drive+ 1770 DFS £199.50 (c)
NOW CHEAPER THAN EVER!

ADVANCED COMPUTER PRODUCTS

Adv 1770 DFS or Adv Disc Tikit. £28.50 (b)
Advanced Disc Investigator £23.50 (b)

UNIVERSAL DISCS

Up to 80T DSDD Clear plastic case inc.
Box of 10. Look! Only £6.10 (b)

CONTROLLERS, CPU'S, ETC

8271 £32.15 (a)
WD1770/72 £12.90 (a)
6502A CPU £4.65 (a)
65C02 Low Power CPU £9.65 (a)

MEMORIES

4416-15NL (TMS or NEC) £2.30 (a)
41464-12 (Solidisk 41254-12) £4.50 (a)
41416-15 (Watford 48415) £2.30 (a)

EPROMS VPP 12.5V or 21V as available,

27128-250ns £3.30 (a)
27256-250ns £4.20 (a)
27512-250ns £9.45 (a)

TTL-DFS CHIPS ETC - Prices on Request

PRINTERS

Panasonic KXP1081 Paper
& Stand £160 (d)
Epson LX86 100CPS, NLQ £215 (d)
Epson FX800 160CPS, NLQ £340 (d)
Canon 1080A 160CPS, NLQ £230 (d)
BBC Printer Lead, Not required for
KXP 1081 £6.00 (a)

MONITORS

Philips BM7502 12" Green £68.55 (d)
Philips BM7522 12" Amber £73.85 (d)
Hantarex CT9000 Med
Res Colour £170.00 (d)
Taxan KX1201 12" Green £85.95 (d)
Taxan Supervision II
12" Colour £268.55 (d)
Taxan Supervision III
12" Colour £317.25 (d)

See the True Value - NOW -

ALL PRICES INCLUDE V.A.T.

Mail order only to:

Cp microsystems

32-34, Surbiton Road, Kingston upon Thames,
Surrey KT1 2HX.

Please note new telephone number

01-394 1452 (Answerphone - we're despatching orders, we'll ring back).

Carriage & Ins.- (a) £0.58, (b) £1.10,
(c) £4.00, (d) £6.96.

More than one item? All sent in one parcel.
Choose rate for your dearest item.
Add 15% VAT to goods & carriage
total price

ALL GOODS NORMALLY IN STOCK

Local Auth. Orders accepted

(See the True Value - NOW -)

DRAM
ELECTRONICS LTD.

**OFFICIAL
ACORN
SPARES
DISTRIBUTOR**

Please phone for prices
Dealer Enquiries Welcome

DRAM ELECTRONICS LTD.

Unit 12, Kingston Mill, Chestergate,
Stockport SK3 0AL.

Tel: 061-429 0626. Tlx: 312242

WITH
PAYROLL

**A LOW COST DISC BASED
PROFESSIONAL
ACCOUNTING PROGRAM**

For the BBC Computer

"Micro-Trader"

INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. "Micro-Trader" offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of up to 1,000 accounts and 5,000 transactions per month.

Nominal Ledger features quick and easy entry of everyday transactions. Up to 6 Bank Accounts, full V.A.T. facilities, Journal Posting. Full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

"MICRO-STOCK"

Stock Control program, fully integrated with "Micro-Trader". 4,000 Stock Items with user defined Codes. Invoice and Credit Notes and Cash Sales routine. Full Stock Held Reports.

£75.00 + V.A.T.

"EXTENDED PAYROLL"

Micro-Aid Full Feature Extended Payroll. For use stand alone or integrated with "Micro-Trader".

£49.95 + V.A.T.

ONLY
£200
+ V.A.T.

"MICRO-MAILER"

A Mailmerge program, fully integrated with "Micro-Trader". With a user Database.

£30.00 + V.A.T.

Compact
BRITISH BROADCASTING CORPORATION
MASTER SERIES MICRO-COMPUTER

Archimedes

PHONE TODAY FOR A FREE FACT SHEET

MEADOW COMPUTERS

11, LONDON STREET, WHITCHURCH, HAMPSHIRE, RG28 7LH

Telephone: Whitchurch (0256) 892008

MIDITRACK

**THE MOST COMPREHENSIVE MIDI-BASED
MUSIC SYSTEM FOR THE BBC MICRO!**

Currently installed in thousands of homes, hundreds of schools and used by leading musicians including Keith Winter (Shakatak), Phil Fearon etc. and proven over 4 years for use with ANY midi instrument by Electromusic Research.

All you need to get started is one midi keyboard, your micro with disk drive plus EMR's MIDI Interface and one or more software packs. You can then expand your set-up to suit your needs - a multi-timbral keyboard from £249 is all that you'll probably want, but EMR's system is expandable to any number of midi instruments, making it ideal for all the family.

Guaranteed to make you a better musician whether you're an absolute beginner or an advanced player! - no extra computer language to learn.

You'll be able to record your music part by part using 'multitrack' techniques of the professional studio, edit music and also the sounds on some instruments. Pieces can be joined together with tempo changes on playback and melodies created step by step can be easily printed out on a dot-matrix printer. You can even produce an exciting visual display as you play!

A new advanced music printing system is also available for 64-part score-writing, producing full scores, individual parts & piano transcriptions on a standard dot-matrix printer plus midi playback during display of music and link to MIDITRACK system.

EMR Miditrack & Scorewriter for BBC MICROS: B, B+, Master & Compact

(On disk). Full range of software + interface from £86 + VAT. Archimedes intelligent system TBA.

SAVE £30! - Send for free information pack, stating Micro and we'll give you a discount voucher worth £30



Phone ELECTROMUSIC RESEARCH on (0702) 335747 (24Hr)
or write to: FREEPOST, EMR LTD, 14 Mount Close,
Wickford Essex SS11 8BR

◀ From Page 65

```

1120 ENDPROC
1130 DEFPROCmen
1140 ONPLX-1GOTO1150,1160,1170,1180,119
0,1200 ELSE1200
1150 !UX=&70A0707:UX!4=&7080707:ENDPROC
1160 !UX=&708070A:UX!4=&70A0708:ENDPROC
1170 !UX=&7080C08:UX!4=&C080C07:ENDPROC
1180 !UX=&80C100A:UX!4=&80C0107:ENDPROC
1190 !UX=&C0A0C10:UX!4=&8100C0E:ENDPROC
1200 !UX=&E0C100E:UX!4=&8100E0E:ENDPROC
1210 DEFPROCset
1220 FX=X:N=4:C=X:S=X:0:Y=17:YX=128
1230 ZX=X:hX=TRUE:Y&81=0:Y&99=&FC
1240 ?&9A=1-(PLX<4):?&9B=140-PLX*16
1250 smX=TRUE:COLOUR3
1260 PRINTTAB(0,2);PLX-1TAB(19,2);LiX
1270 COLOUR1:PRINTTAB(0,6)*"TAB(19,6)"
*
1280 IFLX=0:CALL&E00:ELSECALLOX
1290 T=-2:H=X:0:S=X:0:Y&80=T:CALLQX
1300 ENDPROC
1310 DEFPROCinit
1320 DIMC(20),S(20):hsnX=&1700
1330 hsX=&1800:IX=0:SX=0
1340 FORTX=1T02*PI+.1 STEPP1/10:C(IX)=C
OST:S(IX)=SINT:IX=IX+1:NEXT
1350 ENDPROC
1360 DEFPROCchisc:PROChad
1370 PROCmup:PROCb(60)
1380 PRINTTAB(0,4)FNlines:FORTX=0T011
1390 PRINTTAB(37,6+TX)CHR$156TAB(2,6+TX
)CHR$129CHR$157CHR$135;:IFTXMOD11PRINTS(
hsnX+TX*20-20)STRING$(30-LEN$(hsnX+TX*20
-20)-LENSTR$hsX!(TX*4-4),".");hsX!(TX*4-
4);SPC2
1400 NEXT:PRINT"FNlines
1410 IFIX<>TRUE PROCgname
1420 PROCbel(120):TIME=0
1430 PRINTTAB(6,22)CHR$136"PRESS THE SP
ACE BAR TO PLAY"
1440 REPEAT:IFTIME=100CALL&900
1450 UNTILINKEY-99
1460 *FX13
1470 PROCbel(100):PROCmode(2)
1480 liX=5:plX=2:sX=0
1490 ENDPROC
1500 DEFPROCbel(NX):LOCALTX
1510 FORTX=1T03:SOUND1,2,NX,4:NEXT
1520 ENDPROC
1530 DEFPROChead:PROCmode(7)
1540 FORTX=0T01:PRINTTAB(10,TX)CHR$141C
HR$132CHR$157CHR$135"DUNE HUNTER "CHR$1
56:NEXT
1550 PRINTTAB(13,2)CHR$131"By: G.J.Key"
1560 ENDPROC
1570 DEFPROCmup
1580 IfsX<=hsX!36:IX=TRUE:ENDPROC
1590 IX=10:REPEAT:IX=(IX-1)*4:isX=(IX-1
)*20+hsnX:IFhsX!IX<=sX:hsX!(IX+4)=hsX!IX:
$isX=$(isX-20):IX=IX-1
1600 UNTILIX=00RhsX!(IX+(IX<>FALSE)*4)>
=sX
1610 hsX!IX=sX:$isX=STRING$(19, ".")
1620 ENDPROC
1630 DEFPROCgname
1640 PROCbel(160):PRINTTAB(8,22)CHR$136
"PLEASE ENTER YOUR NAME"
1650 TX=0:$&380=$isX
1660 PRINTTAB(4,7+IX)CHR$131;:*FX21
1670 REPEAT:IX=GET:IFIX=13$isX=$&380:UN
TILTRUE:PRINTTAB(4,7+IX)CHR$135:ENDPROC:
ELSEIFIX<320RiX>127UNTILFALSE
1680 IFTX<19ANDIX<>127VDUI:TX?&380=IX:

```

```

TX=TX+1
1690 IFTX>0ANDIX=127VDU8,46,8:TX=TX-1:I
FTX<>10TX?&380=46
1700 UNTILFALSE
1710 ENDPROC
1720 DEFFNlines:=CHR$146+STRING$(38,CHR
$243)
1730 DEFPROCmode(MX)
1740 VDU22,MX,23;8202;0;0;0;0;
1750 ENDPROC
1760 DATA81,2,81,2,97,4,97,4,97,4,101,4
,109,2,101,2,97,2,89,2,81,2,73,2,60,2,81
,2,97,4,97,4,97,4,101,2,97,2,81,2,73,2,7
3,2,0,0
1770 THEEND
1780 DEFPROCcode
1790 FORTX=0T0&2F:TX?&70=0:NEXT
1800 QX=&E40:OX=&E1D:JX=&120D:EX=&11EF
1810 GX=&15EC:VX=&14DB:Hx=0:UX=&10CC
1820 KX=&130D:Y&7D=7
1830 $&1800=STRING$(200,CHR$32)
1840 PX=&E00:RESTORE2280
1850 REPEAT:READS$:PROCreaddto(SS)
1860 UNTILPX>=1594
1870 !&88=&01FF01FF:!!&8C=&01FF01FF
1880 $(1593)=STRING$(88,CHR$0)
1890 hsX=&1800:FORTX=0T09:READS$(1700+T
X*20):hsX!(TX*4)=10000-TX*750:NEXT
1900 ENDPROC
1910 DEFPROCreadto(SS)
1920 FORXX=0T06:AX=0:FORTX=1T04

```

```

1930 AX=AX+FNdec(MID$(SS, TX+XX*4, 1)) *64
(4-TX)
1940 NEXT: !PX=AX:PX=PX+3:NEXT
1950 ENDPROC
1960 DEFFNdec(a$)
1970 IFa$<"":THEN=VALa$
1980 IFa$<"-":THEN=ASCa$-53
1990 =ASCa$-59
2000 REMmusic
2010 DATA2UdhNo@4Ac9eLXu88oo20Y20W6B
2020 DATA3eZMx23ciCvz?m09iCs9?m09iCs9
2030 DATAuY9c@WWwIk9G0XzWYWM1SYsmJwk
2040 DATAkv03eUec200x2KaB20mx2MKBdfrc
2050 DATA0co9f@o9Vco9hPY96?c9aE5djEap
2060 DATAmEc41h3z2P?t2K5Ai8n8GYU9GYd?
2070 DATAe0DeUHk2Q6x2PmB20?t2PeB3mZc
2080 DATAx@qeJco9?m09e6U9M2Vc0EE02UE2
2090 DATAldkX2QE?t0b440I95kk?004FXE04
2100 DATA00800000NK40SLJhXMa1cNqJiP6d
2110 DATA0AL100000000000000000006FIB
2120 DATA@GYVehopKJ59PKJR0U5p1UE340k8
2130 DATAA20M000B0k001kq7EoA6qrBnML61
2140 DATAcsBLIrChMrK3QoB3ULBnQK5LMrC3
2150 DATApB3QkB5EoBXEqBnMrB3YuC3QsCJ
2160 DATAe0BXEqBnMrCnMsBnEoBqYrBnMrCK
2170 DATAcsC3Z8CaMrC1EpBnEmAnRaAHEoDz
2180 DATAqrBnML61csBLIrChMrNX0rA3Mkbn
2190 DATA0sA3UkbnEqBp0rA3MkbnNLC30oJJ
2200 DATAEqBnMrB3QoB3csBXUtKHEqBnMrB3
2210 DATAqvB3UrBXErNXEoAXEoN3MqB3EoN3
2220 DATAIq54AmAX8LAHALAX0zwahgL5kwDH
2230 DATAZd30wA3Ykbn0tA3UkBHUtM32JJp
2240 DATANJB3MvD50kAX0wCnkva38kI30tMn
2250 DATAIoA3gkA3ZJ03Yt0JsyD3kwP3wzDn
2260 DATAgVPHsy6okwDXkuCHYvD30DyK0oZu
2270 REMsprites

```

```

2280 DATAVNeZ00ZwcbW5S?I74w2R86YmJLW5
2290 DATAbFDMmVDEcioE3vo7zt0IvtoH4AcH
2300 DATA0?@oVIydUeK24jYU48@6?G3ra4kG
2310 DATAmysCU?IEV3EeEFYPMo0PcoHPsoH
2320 DATA4j0HGE8EXEfeFBiPMrs2eYH4qyB
2330 DATAxE2d80EUfFALmEFYf0vmHmd0d3W
2340 DATAXS6deEFYx20HReLz87K5dF6QPFw0
2350 DATAxEfcEFcdUFU7T2014niVbK62x1q
2360 DATAY1@9MAsEUAM4mEbE1P0q163iVM3a
2370 DATAN?pnR8I44jSh4f0B4jWh4fSB4NkU
2380 DATAxSedXF?qeF?rZMI011winbbkmUEM
2390 DATAVH3k0eaI4n4U14mhlUpk0?aitUHk
2400 DATA1uaINFV8YmJn1oZc060MzS1467GZ
2410 DATAVEFd0?agdn05dIVoR8K6Vn6Z??E
2420 DATAVU2U6?qH1z04C9SZVNHZY?KLZ61M
2430 DATAMFTk4v1D8925gF6v0z1k4IQULNca
2440 DATAYFJptAdknx2KR8Jco9baz?YHcda5
2450 DATAjFU7TfdjFELmVdzcjAEm@o72AYH
2460 DATA800EH13IjEyZc1Dje53dxvoMW7IH
2470 DATA50SRqEVDY1Lgz04mMWI1@1UZ06U
2480 DATAJ228zvoF7toH1voI?9oIo@oIs9oH
2490 DATAJ20HZOIFjGzkmFDE?907122BC9?Z
2500 DATA4zTxg0X9vvoPzoYH?aYmZy1sg0X9
2510 DATA1eYA4x2RVE6dAG2J4AcHTA024WYU
2520 DATAVM62V8K3dESW2B1w4w3S800eJf2A
2530 DATAbFdZjFDbFE7jFDrw1DE1w7C0ck
2540 DATAE7dbFD8mVDE8BAEdf8d1B1wVNe2
2550 DATAU0JU06IWMV65ViW5Hua0dM?25V?02
2560 DATA4jYudMG6V0024jYulcK6uV22eEGW
2570 DATA380vUM410ki?cM6xR3?10k10mB
2580 DATAx02UcUeko@o71wYHm06ExF3?132A
2590 DATAauJU4w2R4x2xo0n94?Y4mGbE1B07
2600 DATA0Wd2AYVeHE6R0?o1393eY4mf7E
2610 DATA1B0Co0mdnuo91mYEn@aco9oEzIkH
2620 DATA1ycE30c810C3AY8g2LkuHUuRs17
2630 DATA16Wh0Tx9j0Ud81Dzbf4WjFdzf1Dr
2640 DATA80FyBf4WM1E74yyx0Ym4zyRiCYs
2650 DATAv@acuHUJ1to6mK0I1D0Co0Gd1?b3
2660 DATAo7SS8HCY7X5tHU4661rM7R216Wh
2670 DATA6dx9XGZddFEbA8po2?8IH0SufV5P
2680 DATAw0EMyM7ZcP?M9L64y2xGY@k4eac
2690 DATAzysU80CdaDzizysU81adeTzivW15
2700 DATA0?bzjL252VET2b0a0L0a80W0?Dzi
2710 DATA0L2ZvW00?@rzzoYIzysU80CdMDzi
2720 DATA4H0UjLKaXfDdjF?tXfDgef?ua8I8
2730 DATA87CzcV6vb4L00?8GV02U9UdL9UdL
2740 DATA9UdLQ8JL?LGpQ0I7hL25GYdo6?V?
2750 DATA4s2tVL1Zc@ZkQKIHC7658600eF4k
2760 DATA?8ryROM6Yax4UKB4ymx4U0BjI2W
2770 DATAbQ00mVKfcjTEcG02E?8F50ix4WUH
2780 DATA50iRxB3?4WUCH0?WuV6VvUSWBW1z
2790 DATATuMGxV3?vvpUNFUHHAa3H0CEc1@g
2800 DATAQME0QGM?QGM?QGM?jL25?FDrQ017
2810 DATAjL25GVdre4d?U@YMQ61HiL25NFCU
2820 DATAQMjLjE2UGV081C2ew0iE1?Y4eE@E
2830 DATAAG03CfoHa8I154Cx4faB54mx4feB
2840 DATA536xq?KeVEqdq?JyVTUdSMjKVL6Z
2850 DATAteFvNwZSP5vLsfeYn00wAdtLgUg
2860 DATA4x1vq?IMVEVdSMjK0L6ZQMIB07e5
2870 DATA99Xpx1x67aZVLVdSeJtVE9dmB1u
2880 DATAVsJUVMM5VuK6oA7E0?0p2b642b4a
2890 DATA2b4aV44av@pk1mYJVL05v@pkGYcJ
2900 DATA6?V?4s2tVL1Zc@ZkQKIHC765gSU0
2910 DATA34ZkM72F4q?C4qCAw?cM0?Y7mUfD
2920 DATA0tYJc?c3P@o6N9YHWAcHxF28c6GW
2930 DATA1uYHz44U4q?i4qCguidU00000000
2940 DATA4U0000001U4E0V4?4k6K0tC3ZUAH
2950 DATAU001080002008000200800020
2960 DATA08000200800020080002008000
2970 DATAGo261p1CKZVJMzXROKRYKtgS7Nn
2980 DATA07pv0000000030k020Q71kQA1kkA
2990 DATA30U71kq71kq71kq8000700000000
3000 DATA6xg15F6fIB0Js?20g91U92UW7?0
3010 DATAo7Woc81EY63UY?2kqC1kS@68U53E
3020 DATAMC2Uzv2E0U41zK83003y00000000

```

This is one of hundreds of programs available FREE for downloading on

MicroLink

In addition to these many BBC Micro programs in the MicroLink library will also run on the Electron.

GAME

◀ From Page 137

```

3030 DATA00000000000061U061UM0EMM20U8
3040 DATA1UU80EM4M84etBvWMD351K?51EI
3050 DATA5FI1u8J4JEUB2dmVDUMDIE0U03
3060 DATA0U8e008e0k000kwD00000F110F11
3070 DATA3kI05LQ?1Ew?0k0z0kwD2Xw?kID
3080 DATA3kIf00k?10k88XAA0kk030kA33AA
3090 DATA30E0Akk8028F0UA2aE002FQ3NU0A
3100 DATA1Wg3014A0EA1200030UA3Cc00UUD
3110 DATA10w630Y13Cc030E00004?3kU0000
3120 DATA20003MwC000?Hkk03AwA3k0D2Yw
3130 DATA000tD30w5Xkd0E00D0Ak0UA36U00
3140 DATA0kg@0n0300000E000A300000k80
3150 DATA9E030kQ70n030n020kAwD0015Xkk
3160 DATA02YwA3k0D1Mw000qD30oAnkK0000
3170 DATA03EE000t000053kE0000C00U5F0s
3180 DATA83UUS1EUB2cU?XUY41E15E0cA2Us
3190 DATA5FE0XscDk00C3wyB3EzD3kozCYw
3200 DATAzBPKuSbw20rWef58MolHOKljIXdn
3210 DATASPOCK,JAMES.T.KIRK,SCOTTY,FORD
PREFECT,BONES,HAL,BLAKE,DR. WHO,SMORF,0
PERATING ARTHUR
3220 DEFPROCp(A$,B$)
3230 PRINTSPC(7)CHR$131A$G$STRINGS(10-L
ENAS,")CHR$134B$
3240 ENDPROC
3250 DEFPROCshorten
3260 *TAPE
3270 ENVELOPE1,3,126,0,0,0,0,0,-2,-2,
-2,126,0
3280 ENVELOPE2,1,126,-6,6,-6,0,0,126,-2
,-2,-3,126,0
3290 ENVELOPE3,0,2,2,3,1,1,1,126,-1,-6,
-6,126,0
3300 ENVELOPE4,2,0,0,0,0,0,0,126,-4,0,-
1,126,0
3310 PROCrelocate:*FX15
3320 IF(&220 AND&FFF)<>&934:PX=&900:
RESTORE2010:REPEAT:READSS:PROCreaddto($$)
:UNTILPX>&820:CALL&900
3330 PROhead:G$=CHR$130:PRINT"G$Your
task is to clear the Dune Worlds"G$SPC
5"of the Krotan droids before"G$SPC5"co
lonisation can take place"
3340 PRINTTAB(8)"Use the following key
s:":PROCp("CTRL","Thrust left"):PROCp("
A","Thrust right"):PROCp("","Climb"):PR
OCp("","Decend"):PROCp("SPACE","Fire"):
PROCp("TAB","Smart bomb"):PROCp("H","Hyp
erdrive")
3350 PRINTTAB(5,22)CHR$136"PLEASE WAIT
A LITTLE LONGER"
3360 PROCcode:TX=PAGE+1:A$=STRINGS(255,
*):REPEAT:TX=TX+LENSTX+1
3370 IF?TX=255CLS:PRINTTAB(0,10)"LINE 1
760 IS MISSING OR INCORRECT"CHR$7:END
3380 A$=(TX+3):REPEAT:IFLEFT$(A$,1)="
"A$=RIGHT$(A$,LEN(A$)-1)
3390 UNTILLEFT$(A$,1)<>"
3400 UNTILLEFT$(A$,6)="THEEND"
3410 SOUND0,1,6,10:REPEAT
3420 PRINTTAB(4,22)CHR$(RND(7)+128)"PRE
SS SPACE WHEN YOU ARE READY"
3430 UNTILINKEY-99:*FX13
3440 ?TX=&FF:*FX3,2
3450 *FX15
3460 *FX138,0,203
3470 *FX138,0,13
3480 *FX138,0,249

```

```

3490 *FX138,0,13
3500 END
3510 DEFPROCrelocate
3520 PROhead:IFPAGE=&1900 PRINTTAB(0,1
0)"THIS DELAY WILL BE AS SHORT AS POSSIB
LE":ENDPROC
3530 *FX138,0,128
3540 PRINTTAB(0,10)"PLEASE WAIT WHILST
I RELOCATE TO &1900":*FX3,2
3550 IFPAGE<&1900:*KEY0FORTX=TOP-PAGE T

```

```

0-4STEP-4:TX!&1900=TX!PAGE:N.:PAGE=&1900
IMOLDIMRUNIM
3560 IFPAGE>&1900:*KEY0FORTX=0TOTOP-PAG
E STEP4:TX!&1900=TX!PAGE:N.IMPAGE=&1900:

```




| | | | | | |
|--------------|---------------|---------------|---------------|---------------|---------------|
| 10 = 00 | 610 = E0B D | 1210 = 2F29 2 | 1810 = F174 2 | 2410 = 3A55 A | 3010 = E5BA A |
| 20 = 00 | 620 = FF83 2 | 1220 = E5C6 C | 1820 = 52AD 4 | 2420 = 720 3 | 3020 = A7E8 5 |
| 30 = 00 | 630 = 228A E | 1230 = F1 C | 1830 = DC0F 2 | 2430 = D7EB D | 3030 = 2D65 4 |
| 40 = 00 | 640 = ED0F C | 1240 = E6B4 7 | 1840 = 9C02 B | 2440 = E146 C | 3040 = 6940 6 |
| 50 = 71CE E | 650 = 47A3 A | 1250 = B33D 6 | 1850 = DE17 5 | 2450 = EEEF D | 3050 = 50C3 5 |
| 60 = ED71 2 | 660 = A779 4 | 1260 = 6BB9 4 | 1860 = 41A3 1 | 2460 = 91BD D | 3060 = F0CB C |
| 70 = 4037 D | 670 = 9AEF A | 1270 = 1B63 5 | 1870 = F725 2 | 2470 = 72DB 2 | 3070 = CF23 F |
| 80 = DEBB 0 | 680 = C11B 3 | 1280 = 809F 5 | 1880 = C04F 6 | 2480 = DD9C B | 3080 = 55A9 A |
| 90 = 5C40 0 | 690 = F90F 8 | 1290 = ED99 2 | 1890 = E618 6 | 2490 = 3B51 6 | 3090 = 801 C |
| 100 = 756E 6 | 700 = D86F 1 | 1300 = ED0F B | 1900 = ED0F 7 | 2500 = A66E 1 | 3100 = 9C21 A |
| 110 = 43CA E | 710 = F49D 0 | 1310 = 344C 6 | 1910 = 404 C | 2510 = B67D B | 3110 = 6103 5 |
| 120 = 49AF 9 | 720 = B5F6 9 | 1320 = F1FB 3 | 1920 = 7277 2 | 2520 = 9B68 1 | 3120 = C2C7 8 |
| 130 = 8B67 F | 730 = 3AC1 5 | 1330 = B3E8 7 | 1930 = 8456 8 | 2530 = 315 4 | 3130 = D661 8 |
| 140 = A31C 8 | 740 = 1F34 9 | 1340 = 6519 9 | 1940 = 1DE2 E | 2540 = 358D 4 | 3140 = 36BB F |
| 150 = CEC9 0 | 750 = D5D4 1 | 1350 = ED0F 4 | 1950 = ED0F 4 | 2550 = CAE7 2 | 3150 = D2D6 D |
| 160 = 3362 2 | 760 = 42E7 C | 1360 = 859F 2 | 1960 = 9C56 8 | 2560 = 6E08 E | 3160 = ED3 E |
| 170 = A3D0 9 | 770 = 227A 8 | 1370 = E46E 9 | 1970 = FCE4 9 | 2570 = 7A4A 9 | 3170 = C41C 9 |
| 180 = 2011 3 | 780 = ED0F F | 1380 = 2499 5 | 1980 = 683B 2 | 2580 = 9448 B | 3180 = 2F9E A |
| 190 = C7A3 F | 790 = 65A0 4 | 1390 = FE50 A | 1990 = 62DD C | 2590 = 268E C | 3190 = 1347 4 |
| 200 = CA5A 5 | 800 = D632 F | 1400 = A4CD 5 | 2000 = 0 C | 2600 = CB74 1 | 3200 = CDF5 1 |
| 210 = B7F7 4 | 810 = E846 E | 1410 = DD99 3 | 2010 = 6769 9 | 2610 = 1374 6 | 3210 = 892F 8 |
| 220 = 944F 0 | 820 = ED0F 5 | 1420 = 4AF2 9 | 2020 = B17A B | 2620 = 79AE A | 3220 = CF00 D |
| 230 = 2055 5 | 830 = 5CE9 3 | 1430 = A825 D | 2030 = B83D 5 | 2630 = CB85 F | 3230 = A473 E |
| 240 = E014 2 | 840 = B2BB 3 | 1440 = DEF2 E | 2040 = D385 D | 2640 = 9535 9 | 3240 = ED0F 4 |
| 250 = DEEB 8 | 850 = 3A84 C | 1450 = F23 7 | 2050 = DA19 8 | 2650 = 8A1 6 | 3250 = 8F73 C |
| 260 = 7C21 A | 860 = A9AA 6 | 1460 = C0E4 8 | 2060 = AAEF B | 2660 = B6F 1 | 3260 = CD93 B |
| 270 = CC01 2 | 870 = E810 D | 1470 = 4382 D | 2070 = 4500 F | 2670 = 3399 2 | 3270 = 217A 3 |
| 280 = 75DF 2 | 880 = BA67 5 | 1480 = A9CB D | 2080 = CC97 9 | 2680 = F51D 4 | 3280 = 6F38 4 |
| 290 = 577F C | 890 = ED0F 8 | 1490 = ED0F 5 | 2090 = 62BA E | 2690 = FCBA B | 3290 = 828F B |
| 300 = ED0F D | 900 = FB0B A | 1500 = D9FC C | 2100 = 4539 5 | 2700 = A9D 9 | 3300 = F272 E |
| 310 = 6969 D | 910 = A812 9 | 1510 = 2B05 5 | 2110 = 3AE9 5 | 2710 = BB31 C | 3310 = 4C1 5 |
| 320 = 235B B | 920 = 4B21 F | 1520 = ED0F 6 | 2120 = 16DD 7 | 2720 = 2528 8 | 3320 = 2A11 C |
| 330 = 588C D | 930 = 9114 E | 1530 = 8B1F A | 2130 = 4805 2 | 2730 = 38CC 3 | 3330 = 5A21 C |
| 340 = C04D 7 | 940 = 4B5A D | 1540 = 2EDB 7 | 2140 = 945F 5 | 2740 = B9FE B | 3340 = 41E8 3 |
| 350 = 1AAA 4 | 950 = 73C8 4 | 1550 = 6F36 B | 2150 = 5C9E B | 2750 = C0D3 B | 3350 = BE62 8 |
| 360 = 614F D | 960 = DBD8 B | 1560 = ED0F 2 | 2160 = 18AA D | 2760 = E0C5 C | 3360 = C779 C |
| 370 = 16AF 1 | 970 = E035 C | 1570 = 34BC 4 | 2170 = 5603 D | 2770 = 6B1 B | 3370 = EBAC 0 |
| 380 = D643 4 | 980 = C5B1 C | 1580 = 395 F | 2180 = F47D 6 | 2780 = A6EE 8 | 3380 = 64B2 D |
| 390 = 1BE3 6 | 990 = 6BEF 5 | 1590 = FE72 B | 2190 = 45C7 A | 2790 = 8854 2 | 3390 = C5E4 0 |
| 400 = ED0F 0 | 1000 = B355 5 | 1600 = C12B F | 2200 = 8E 2 | 2800 = 9273 C | 3400 = 85C6 B |
| 410 = 4981 B | 1010 = 19DF 8 | 1610 = D089 4 | 2210 = 4B05 6 | 2810 = FE07 5 | 3410 = A00E 5 |
| 420 = B519 B | 1020 = E849 9 | 1620 = ED0F 3 | 2220 = 9D9 7 | 2820 = 17F2 7 | 3420 = 9FA5 9 |
| 430 = 61AE B | 1030 = 638 7 | 1630 = D936 E | 2230 = 5DD5 D | 2830 = FD55 7 | 3430 = 4A0F 5 |
| 440 = F2F8 B | 1040 = 776E B | 1640 = EE80 4 | 2240 = B8CB 7 | 2840 = 11E5 A | 3440 = F811 2 |
| 450 = ED0F C | 1050 = 2661 5 | 1650 = CEAD 8 | 2250 = 65B4 C | 2850 = 5B01 1 | 3450 = A022 0 |
| 460 = 4623 1 | 1060 = 3292 4 | 1660 = 439D 8 | 2260 = 1C31 0 | 2860 = F0D6 D | 3460 = D3B5 4 |
| 470 = CBA2 5 | 1070 = A3EC F | 1670 = AFFB F | 2270 = 0 0 | 2870 = D515 A | 3470 = 42B1 A |
| 480 = 61F6 8 | 1080 = BC77 D | 1680 = 19A6 B | 2280 = EE56 E | 2880 = 9EC7 7 | 3480 = BE3B E |
| 490 = 7B24 4 | 1090 = D9E2 4 | 1690 = CB50 1 | 2290 = BFCE F | 2890 = 1D68 A | 3490 = 42B1 E |
| 500 = 3BF7 C | 1100 = 5B31 6 | 1700 = E014 4 | 2300 = ABE7 D | 2900 = C1AE 8 | 3500 = FD2E 9 |
| 510 = F64E 6 | 1110 = 67B2 0 | 1710 = ED0F D | 2310 = EF1F A | 2910 = E39D F | 3510 = 138F B |
| 520 = 992D A | 1120 = ED0F 9 | 1720 = 4759 1 | 2320 = 629 7 | 2920 = 75FD 1 | 3520 = CBA1 F |
| 530 = 1B47 C | 1130 = C430 E | 1730 = 78B9 D | 2330 = F54 3 | 2930 = 8C89 B | 3530 = 5DEC 4 |
| 540 = ED0F 9 | 1140 = D53C F | 1740 = 7998 5 | 2340 = 7D96 D | 2940 = C2F3 4 | 3540 = 7BCF A |
| 550 = AF64 8 | 1150 = 823F B | 1750 = ED0F 5 | 2350 = 6C31 6 | 2950 = 2F73 F | 3550 = 3CED 7 |
| 560 = 3F71 3 | 1160 = BB68 C | 1760 = 4492 8 | 2360 = 70D8 A | 2960 = C9CD 9 | 3560 = FB79 9 |
| 570 = ED0F 4 | 1170 = 8F39 7 | 1770 = 6777 B | 2370 = A6D0 9 | 2970 = 7870 6 | |
| 580 = 3E78 5 | 1180 = A7A1 7 | 1780 = 1F9B 1 | 2380 = D74E 7 | 2980 = 5464 8 | |
| 590 = A022 4 | 1190 = A2A1 3 | 1790 = 1AF2 E | 2390 = B395 0 | 2990 = 2A87 A | |
| 600 = 3326 E | 1200 = B58E 5 | 1800 = AF63 C | 2400 = 47C1 C | 3000 = 720C A | |

This listing is included in this month's tape & disc offer. See order form on Page 149.

COMPUTER REPAIRS (UK)

2 Austins Place, Hemel Hempstead,
Herts. HP2 5HN Tel: (0442) 217624

Too many function strips, wondering where to put them?
Then maybe you will be interested in our purpose built function strip holder.

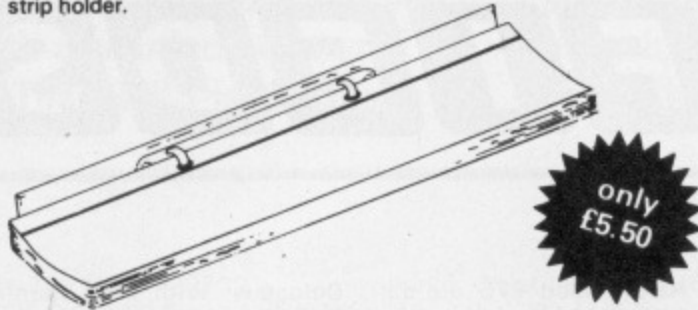

only
£5.50

Each holder comes with 10 clear plastic sleeves. Easily fitted to the BBC or BBC-Master series.

To compliment this little add-on, we have commissioned a function strip design programme, compatible with Epson dot matrix printers (works in condensed mode), and can also supply blank function strip cards.

| | |
|---------------------------------------|--------------|
| Flip over function strip holder | £5.50 |
| Extra sleeves for above | £0.40 |
| Blank function strip cards | £0.25 |
| | 10 for £1.25 |
| Function strip design software | £4.50 |

14 day money back guarantee if not satisfied


Available only from Computer Repairs (UK) Please make cheques or postal orders payable to: Computer Repairs (UK), to the above address.

*State whether disc or cassette

P.S. We repair all makes of Micro, got something faulty, why not give us a ring.

Trade enquiries welcome

Panasonic KXP1081



with BBC cable & paper
£169.00 (£146.96+VAT)
above with Screen Dump & 2m cable
£175.00 (£152.17+VAT)

| | | |
|-----------------------------|---------|---------|
| | Exc VAT | Inc VAT |
| KXP1080 Fabric Ink ribbon | 4.26 | 4.90 |
| KXP1080 View Printer Driver | 8.65 | 9.95 |
| KXP1080 Control/Dump Rom | 13.00 | 14.95 |

Panasonic KXP1082
(as 1081 but 160cps)
with BBC cable & paper
£209.00 (£181.74+VAT)

EPSON LX86
with BBC cable & paper
£199.00 (£103.04+VAT)

Canon PW1080A
with BBC cable & paper
£239.00 (£207.83+VAT)

Kaga/Taxan KP810
With BBC cable and paper
£239.00 (£207.83+VAT)

STAR NL10
with BBC cable & paper
£209.00 (£181.74+VAT)

Kaga/Taxan KP815
With BBC cable & paper
£299.00 (£260.00+VAT)

CITIZEN 120D & LSP10
with BBC cable & paper
£169.00 (£146.96+VAT)

EPSON LX 800
With BBC cable & paper
£229.00 (£207.83+VAT)

JUKI 6100
with BBC cable & paper
£299.00 (£260.00+VAT)

VOLTMACE JOYSTICKS

| | | |
|------------------------|-------|-------|
| Delta 14B single | 11.26 | 12.95 |
| Delta 3B single | 9.52 | 10.95 |
| Delta 3B twin | 15.61 | 17.95 |

PRINTER ADDONS

| | Ex VAT | Inc VAT |
|---------------------------------|--------|---------|
| Universal Printer Stand | 13.00 | 14.95 |
| LX800 Sheet Feeder | 68.70 | 79.00 |
| LX Sheet Feeder | 47.83 | 55.00 |
| LX Print Ribbon | 3.00 | 3.45 |
| FX/LQ Sheet Feeder | 106.96 | 123.00 |
| NL-10 Sheet Feeder | 47.83 | 55.00 |
| NL-10 Print Ribbon | 4.80 | 5.52 |
| 120D Sheet Feeder | 86.09 | 99.00 |
| 120D Print Ribbon | 4.00 | 4.60 |
| KP/PW Print Ribbon | 3.39 | 3.90 |
| Juki 6100 Dust Cover | 5.60 | 6.44 |
| Printer Dust Covers other | 4.00 | 4.60 |

PRINTERS/CABLES

| | Ex VAT | Inc VAT |
|-------------------------------|--------|---------|
| Epson EX800 | 404.35 | 465.00 |
| Epson LQ800 | 426.09 | 490.00 |
| Epson FX800 | 313.04 | 360.00 |
| Epson FX1000 | 413.04 | 475.00 |
| Juki 2200 Daisy | 225.22 | 259.00 |
| Juki 5520 Colour | 369.57 | 425.00 |
| Kaga/Taxan KP910/15 | 350.00 | 402.50 |
| MP 165 | 169.57 | 195.00 |
| 1.5m (4 foot) BBC cable | 5.70 | 6.60 |
| 2.0m (6 foot) BBC cable | 7.74 | 8.90 |
| Compact printer cable | 7.74 | 8.90 |
| IBM PC printer cable | 9.57 | 11.00 |

EPROMS, 8271

| | Ex VAT | Inc VAT |
|-------------------------------|--------|---------|
| 1-9 27128 250nS | 3.74 | 4.30 |
| 10+ 27128 250nS | 3.43 | 3.95 |
| 1-9 2764 250nS | 3.00 | 3.45 |
| 10+2764 250nS | 2.74 | 3.15 |
| 1-9 27256 250nS | 4.22 | 4.85 |
| 10+27256 250nS | 3.83 | 4.40 |
| 1-9 TTL/Cmos set | 3.91 | 4.50 |
| 1-9 8271 controller | 32.17 | 37.00 |
| 10+ 8271 controller | 30.43 | 35.00 |
| 1-9 6264 LP 150nS | 2.56 | 2.95 |
| Acorn 8271 DFS | 41.74 | 48.00 |
| Acorn 8271 NDFS Upgrade | 51.30 | 59.00 |

ROMS

| | Ex VAT | Inc VAT |
|-----------------------------|--------|---------|
| Inter-Word | 37.39 | 43.00 |
| Inter-Sheet | 36.52 | 42.00 |
| Inter-Base | 48.70 | 56.00 |
| Wordwise Plus | 37.39 | 43.00 |
| Spell Master | 40.87 | 47.00 |
| ACP Disc Investigator | 22.61 | 26.00 |
| ACP 1770 DFS ROM | 26.96 | 31.00 |
| ACP Disc Toolkit | 26.96 | 31.00 |
| View 2.1 | 33.91 | 39.00 |
| ViewStore | 38.26 | 44.00 |
| OverView I & II | 77.39 | 89.00 |
| View Professional | 77.39 | 89.00 |

DISKETTES

| | Ex VAT | Inc VAT |
|----------------------------------|--------|---------|
| 10 Banana Reversible | 8.65 | 9.95 |
| 10 96tpi D/S D/D + case | 13.90 | 15.99 |
| 10 96tpi D/S D/D + case | 7.39 | 8.50 |
| 10 96tpi D/S D/D in box | 6.52 | 7.50 |
| 50 96tpi D/S D/D in boxes | 21.70 | 24.95 |
| 100 96tpi D/S D/D in boxes | 39.13 | 45.00 |
| 50 Disc Box hinged + lock | 7.78 | 8.95 |
| 100 Disc Box hinged + lock | 8.65 | 9.95 |
| Black Library case | 1.21 | 1.39 |

DISC DRIVES

| | Ex VAT | Inc VAT |
|-------------------------------------|--------|---------|
| Toshiba 400k 80T chassis | 65.22 | 75.00 |
| Toshiba 400k + case etc | 82.61 | 95.00 |
| Cumana CSX100 | 91.30 | 105.00 |
| Cumana CSX400 | 124.35 | 143.00 |
| Cumana CD800S | 260.00 | 299.00 |
| MD400A 400k No PSU | 101.74 | 117.00 |
| MD400B 400k & PSU | 116.52 | 134.00 |
| MD802C 800k No PSU | 190.43 | 219.00 |
| MD802E 800k & PSU | 216.52 | 249.00 |
| MD802D 800k & stand | 225.21 | 259.00 |
| Phone for Viglen & Torch Winchester | | |

MONITORS

| | Ex VAT | Inc VAT |
|------------------------------|--------|---------|
| Phillips CM8833 | 230.43 | 265.00 |
| Phillips CM8852 | 251.30 | 289.00 |
| Phillips BM7502 Green | 68.70 | 79.00 |
| Phillips BM7522 Amber | 73.91 | 85.00 |
| Phillips BM Tilt stand | 7.78 | 8.95 |
| Taxan KX P31 Green | 77.39 | 89.00 |
| Taxan KX P39 Green | 86.09 | 99.00 |
| Taxan KX Amber | 86.09 | 99.00 |
| Taxan Super Vision 625 | 317.39 | 365.00 |
| Microvitec 1451 | 221.74 | 255.00 |
| Microvitec 1451 AP | 260.00 | 299.00 |
| 14" Tilt/Swivel Stand | 13.87 | 15.95 |

MASTER/COMPACT

| | Ex VAT | Inc VAT |
|--------------------------------|--------|---------|
| Master 128K Micro | 365.22 | 420.00 |
| Master ET 128K Micro | 303.48 | 349.00 |
| 512 Co-processor | 185.00 | 212.75 |
| Turbo Upgrade | 98.78 | 113.50 |
| Acorn Z80 2nd Pro | 317.39 | 365.00 |
| Acorn Cartridges | 10.87 | 12.50 |
| Peartree Cartridges from | 8.65 | 9.95 |
| Care Cartridges from | 7.65 | 8.80 |
| ARM Assembler Book | 12.00 | 12.00 |
| Understanding Interword | 6.50 | 6.50 |
| Reference Manuals | 14.00 | 14.00 |
| View 3/View Sheet Guides | 9.00 | 9.00 |
| Master & B Dust Covers | 3.00 | 3.45 |
| Monochrome Compact | 373.04 | 429.00 |
| Second user BBC B's available | | |

Phone for our best price before placing your order
EDUCATIONAL & GOVERNMENT ORDERS WELCOME

All products have a 12 month no quibble guarantee
Prices subject to variation without prior notification
We are closed to callers all day Wednesday & some Saturday afternoons
Carriage 92p (80p + VAT) Securicor £8.90 (£6.00 + VAT)

WeServe

Larger items
delivered
by Securicor



Micro Dept.
128 West Street,
Portchester,
Hants.
PO16 9XE
Tel: 0705 325354

First issue out now!!! First issue out now!!!

Archive

The subscription magazine for *Archimedes* users

Edited by

**Paul
Beverley**

Published by

**Norwich
Computer
Services**



For full details, contact:- Norwich Computer Services,
18, Mile End Road, Norwich, NR4 7QY. 0603 - 507057.

Articles including:-

- DIY upgrade 305 to 310
- Basic concepts I - WIMP's
- What's new in BASIC V?
- ARM assembly language
- News from Acorn
- View and Wordwise Plus
- System Delta database
- Adding a 5.25" drive

Services to subscribers:-

- File transfer 5.25" to 3.5"
- Special discounts
- Technical advice

Cost:- £10 for 1 year
£6.50 for 6 months

(Prices are for UK only)

MICRO USER

CLASSIFIEDS

- Redbox system + Red5 alarm and manuals, unused as new £130. Tel: 0624 822326 after 6pm.
- Disk drive 3.5 inch, excellent £45. Tel: Ben 01 546 4762.
- Games, second hand originals £3, £5 or £1.50 (with other only). Also Quickshot joystick and Starstick Rom £20 together. Viglen cartridge unit + 5 cartridges £20. Tel: 0734 876531.
- Electron Plus 1, Plus 3, 16k sideways Ram, E00 DFS, joystick, data recorder, lots of software and magazines. All manuals and leads £240 o.n.o. Tel: 0925 601825.
- BBC wordprocessing system worth £1350 sell for £850 o.n.o. includes £300 of Rom software and £1000 of hardware for full details. Tel: 01 204 4838 Richard.
- BBC B, Torch Z80 with software, twin 40/80 drives, monitor stand housing, monitor, £400 + other software £660 may split. Tel: 0865 880362.
- Original software: including Arkanoid, Firetrack (disc), G.A.C (disc), Hobbit (disc), Elite (disc), ...60+ games. Offers £100 will split. Tel: 0234 58992 after 6.00pm.
- 6502 second processor and Bitstix 1 £175. RH Lightpen and software £10. Tel: 0223 880419.
- BBC B issue 7, Acorn DFS, Shado Recorder, 16 tapes, Rom board only £250. Tel: 0970 86231 after 5pm.
- Exprom Rom/Ram card £25. Bar code reader teaching pack £30. Wordwise+ including manuals and registration card £20.

- Discdoctor, Exmon II wordwise roms, each with manuals, £15 each. Tel: 091 386 6416 (Durham)
- BBC B+ 128k sideways ram £385 o.n.o. Cumana 200k - 40T dual drive, PSU+ Mini Office II £135 o.n.o. All complete, manuals, leads covers. All superb condition. Accept £500 for everything. Tel: Ian 04023 47149.
- Cumana CS200 80 Track Drive with PSU Cables Comprehensive Manual Formatter Disc. Boxed as new £50 o.n.o. Tel: 01 778 6290 Evenings
- Seikosha GP-100A Mark II Dot Matrix Printer. Boxed, New Condition. Owners Manual Centronics Compatible 50cps 80 cols: £40 for quick sale. Tel: Bristol 500491
- BBC B System. Everything needed to begin. Hardware and Software list too large to mention. Ring for Details. Complete package worth over £1000. A Bargain at £550. Tel: 01 577 2909
- BBC B Acorn DFS 32K Side Ways Ram Cheetah Sweetalker Nightingale Modem Commstar II Shinwa CP 80 Printer Microvitec Cub Monitor RGB+PAL Twin DS 40/80T Switched Disk Drive Computer Desk Joysticks Twin LVL Books Games Eproms Tel: 0252 861431 Evenings for further details or write: Cherry Trees 4 Acre Close, Ashton, Keynes, Wilts. for details.
- BBC B Watford DFS 80 Track D/S Drive and sideways Zif Socket £240 Tel: 0844 51570
- Seikosha GP100A Printer with

- cable. Hardly used £75 o.n.o. Tel: 091 266 8335 Evenings
- Software and Hardware for sale. Loads Roms, Aries, Mouse, Modem, Repton, Ravenskull, Pagemaker. Disks Galore. All cheap. Selling entire BBC System. Tel: 0843 291167 for list details. Evenings/weekends
- Wanted 40/80T Disc Drive D.S With Manual and Utility Disc. Tel: 0242 672286
- BBC B Disc Drive Sideways Ram Mouse Printer Plus £1500 Software £330 Roms £90 Books. All for only £650 Will sell separately. Tel: 01 698 0216 Evenings/Weekends
- BBC B Cassette Games From Elite To Trivial Pursuit. From £1 to £5. Tel: 01 390 0476 after 4.45pm
- Wordprocessors for sale Interword Wordwise Boxed, unused and used View 2.1 £25 each Clements 21 Greenaway Place, Donington, Telford, Salop TF2 7JF.
- Is there anybody in the Cardiff area who would like to teach me how to get the best from my Beeb? Small Remuneration offered. Tel: Peter 0222 610402
- Any Eproms Programmed. More details Tel: Leicester (0533) 717394. Ask for David Chamberlain
- BBC B OS 1.2 Solidisk DFS 40/80T DS/DD Drive Beebcalc Rom Litepen Joystick and Software Only £325. Tel: 0925 755393
- Chess Expert. Disk-based Storage, Retrieval and Analysis system. Graphics comments and interface to White Knight and

- Colossus. With 28K openings Database or optional mammoth 350K database. Send £1 for Demonstration Disc to Bernard Hill, Hawthorn Bank, Scott's Place, Selkirk, Scotland.
- BBC B DFS 1.20S Issue 7 plus DS/DD Disc Drive and Software £290 o.v.n.o. Tel: (06284) 4874 Bucks
- Bitstik 1 Never used so still boxed £180 No offers. Also lots of Original Software from £1 each. Tel: 01 859 1434
- BBC B Solidisk 128K DFDC ADFS Two 40/80 800K Drives. Green Monitor AMX Mouse. Tel: York 783414 Evenings
- Opus Challenger 512K Ram Disc cost £250 new. Offers around £150. Tel: Mike 0753 888994 anytime.
- Roms: ACP ADT ADI; Pace Commstar 2; Acorn ADFS. All originals £15 each. Tel: 0903 755800
- Torch Z80 Second Processor Double Disk Drives for BBC B. Includes perfect software also tabs Accounting Programs and manuals. £300 o.n.o. Tel: 01 398 8623
- Acorn 6502 2nd Processor +Elite 2 £90. BBC Akhter 40/80T 400K 5¼in drive £85. BBC B Roms, ADI mega transrom, GXR/ discs, revs + 4 tracks, 3D graphics. All £70. Tel: Chris on Knowle 6360.
- BBC B OS1.2, Printer, Opus Disc Drive, AMX Mouse and pagemaker, Rom/Ram Board, Replay, Wordwise plus Solidisk DDFS, and £200+ of software only £700 plus leads and man-

PLEASE PRINT THIS AD IN THE NEXT MICRO USER

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Cheque enclosed for £_____ (minimum £2 for 10 words)

Name _____

Address _____

I certify that any software offered for sale is original and not a copy
Signed _____

POST TO: Micro User Classifieds, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Has upgrading your BBC Micro given you hardware you no longer need? Or have changing interests left you with unwanted software? Then THIS is the place

to advertise your surplus items.

Our 179,000 readers are always on the lookout for a bargain and this is the first place they'll look!

An added bonus!
Your advert will be automatically displayed on MicroLink, the electronic mail service operated in association with Telecom Gold. This means it will be seen by thousands of computer enthusiasts who can send an instant response.

uals. Tel: (0527) 72732

● BBC B OS1.20 Board 4 Watford DFS 1.30 £200. Tel: Paul 01 550 7759 (Essex)

● Electron Shadow Ram plus Software £75 plus 3 10 Discs. T2P3(V2) £100. Plus 1 user port £50 Rombox View Viewsheets Viewstore Arm 16K SWR £75 Viglen Master Console £25. Tel: 0734 665180

● Tandon Target, Almost new, 20MB Disk, all manuals etc. Under guarantee. Only £1590 Inclusive. Surplus to requirements. Tel: 01 580 7144

● Bargain! BBC B1.2 OS Watford DFSDS 80T Drive floppywise/ toolkit plus Solidisk Megboard software worth £400 (Cholo, Sentinel, Paperboy..) together £250 will split. Write to Martin Erdrich, Muelben 6, 7605 Bad Peterstal, West Germany.

● Microtext Plus complete with Rom discs and all manuals. Perfect condition £125. Tel: (0304) 812943

● Philips Monitor £50, 40/80T Drive £75. Joysticks £5, Interword £30. Watford DFS £10. Watford Romboard £20. Shadow Ram £35. Transferom £10. Tel: (0933) 674661

● WANTED: LVL Echom (I broke mine!). Tel: Gorseinon 0792 895500 Evenings

● BBC B OS1.2 Solidisk DDFS and 32K Swr, £195. Tel: Stoke (0782) 393535

● Wanted: +3 and Manual for my schools Electron. Please ring 0302 855468 after 4.30pm.

● Master 128 with 40/80 double sided disk drive, Acorn teletext adapter with A.T.S., AMX mouse with Super Art, metal plinth software includes Max Rom, Desfax-7, Exmon, Superiors Speech, Stargraph, Sleuth, AEFS macro assembler colour, Elite revs etc. Bargain at £550. Tel: Mark 0222 830508 (evenings) will not split!

● BBC B, 40T drive, Viglen case £250. Watford Ramboard £30. Watford Romboard £15. AMX Mouse etc £30. Accelerator £25. Interword £25. Dumpout3 £15. Wordwise £10. Games £10 no offers. Tel: Rotherham (0709) 365097 after 7pm.

● 14 BBC games cassettes £45. Write to James Watson, 22 Bushy Grove, Kingswood, Maidstone, Kent, ME17 3QL.

● Wanted medium or high resolution colour monitor, modem, speech synthesiser, dot matrix

printer. Must be Master compatible. Tel: 0392 71951.

● Volex teletext adapter for BBC B £50. Tel: 0276 71714.

● Tandy DMP110 dot matrix printer, parallel serial, 9x9 dots various fonts, graphics lead, Wordwise, manuals £85. Tel: 0332 832807.

● Torch Z80 board, software, roms, leads etc. Also brand new disc drive with manuals and leads cost over £350 asking £130 for both, will split. Tel: 0373 87459.

● Master compact colour monitor plus 5.25 drive, mouse companion software, 30 discs, book, manuals cost £1200 sell £700. Tel: Keith 0992 36511.

● Mannesmann Tally MT80 printer, 80cps, 80 cols, Epson compatible control codes (including italics). Excellent condition £120 o.n.o. Tel: 0287 76768 (6-7pm)

● BBC B issue 7 o.s.1.20 Watford DDFS Mitsubishi MU583 40/80T D.S drive, Watford 32k shadow Ram Interword plenty of software £'s worth books magazines plus all manuals. All excellent condition £375 o.n.o. Tel: Airdrie 53960 evenings.

● BBC B cassette, cover, twenty games (mainly adventures) £200 o.n.o. Tel: 051 652 3903 or 0691 774085.

● Acorn 32016 second processor one megabyte ram complete with Panos operating system and languages. Fortran-77, Lisp, Pascal, C and basic. £700 o.n.o. Tel: 0704 821282 evenings.

● BBC B 32KSWR 5.25 inch and 3 inch drives in Viglen console. Microvitec 1451 monitor roms, discs, tapes, manuals £575. Tel: 0908 316746.

● Mannesmann Tally MT80 Printer as new £110 Cumanu 40TS/S Disc Drive £45. Tel: 0934 712709

● BBC B, Acorn DFS, Watford 12 rom/ram board, View, Cumana 80T disk drive, Kaga KD815 prin-

ter, Cumana touchpad, books, magazines and software £750 o.n.o. Tel: 0705 691608.

● AMX Extra £12, Multi-Font NTQ £17, Toolkit+ £15, System Delta including reference guide £40, Gemini money management £6, Superior collection2 £6. Originals. Tel: 03955 2660.

● Artists! Designers! BBC Master 128 with saturn 4096 colour palette. Watford 40/80 DS disc drive, Ferguson TV/monitor, Watford digitiser, Panasonic KP1080 printer, AMX mouse and mat, Superart pagemaker, Pear-tree artist Dumpout3, reference manuals less than a year old. Excellent condition under guarantee worth over £1300. Bargain at £850 o.n.o. rather not split. Contact Steve Darbishire 0539 32707 also Sony PRO-8 camcorder many extras poa.

● BBC Model B OS 1.2 £160, Watford DDFS £40, 13 Rom board £20, Rom manager £15, File-plus Rom £20, 32k shadow Ram £40. AMX Art £40. Acorn 6502 2nd processor + Hi-view word processor £120. Original software £30. All excellent working order, boxed with manuals £450 or as listed. Tel: Thatcham 64615.

● BBC B Issue 7, Acorn DFS dual 40/80t D/D with PSV colour monitor 6502 2nd processor sideways Rom/Ram board, joysticks s/ware £650. Tel: Evens 0474 534418.

● Torch Z80 with software £145, twin 40/80 drives, PSU, in monitor housing £170, Philips monitor £50, disc software including Fleet St £25, Superior Hits £7.50. Tel: Oxford (0865) 880362 for list.

● Acorn Z80, all software and manuals £250. Watford double BBC plinth £12. Elite, Thrust, (disc) £7 each. Tel: 061 432 7518.

● Software on 40 track 5.25 inch disk. Mini Office II £10. Wordwise

Plus on Rom £35. Both boxed with manuals. Tel: 0536 743966.

● Acorn Z80 second processor plus software (7 discs) and manuals £180. Cuman single 5.25 inch disk drive £45. Tel: 0536 743966.

● Electron, Plus 1, Plus 3, PMS 2nd processor, Rom adaptor, T2P3 Rom, turbo driver, user port, data recorder, games, database, books, £245 o.n.o. Tel: 0203 543936.

● Wanted back numbers Micro User March - December 1983. Write to Ray Vassallo, 28 Old Doni Street, Rabat, Malta. Stating price for each copy. Willing to pay postage.

● VDU Microvitec 653 Cub, Cumana switchable 40/80 dual dd, Mannesman MT80 printer, joysticks, sideways Ram solidisk, tapedeck, bargain fast sale £550. All as new. Tel: Vince 04203 89634 evening.

● Master 128, 40/80 disc, AMX mouse, Super Art, Pagemaker, revs perfect £400. Tel: Oxford 0235 850137.

● Morley teletext adaptor with advanced Teletext R System Rom, Utilities disc and power supply unit £60. Tel: 01 952 7244.

● Windglider Windsurfer complete with rig for sale £45. Buyer collects. Tel: 01 540 9968.

● BBC B DFS 1.2 + Opus 40 track diskette drive, all manuals £250. Tel: 0276 681764 evenings.

● Cassettes Graphito £15. G.A.C £15, Yie Ar £5, Jump Jet £5. Tel: 0302 840280.

● BBC B with Basic II 1.20S DNFS ATPL-SWR Pace DS/DD 80/40 drive, Music 500 - 40 discs misc. software £350 o.n.o. Tel: 061-430 6277 after 7pm or Sunday.

Ads will be accepted under the following conditions:

- This service is EXCLUSIVELY for the use of private readers. No trade ads will be allowed.
- To avoid encouraging software piracy, all ads will be carefully vetted before they are accepted.
- Ads can only be accepted on this form (or a photocopy of it).
- There is no maximum to the number of words you include in your ad. If there is insufficient room on the form, continue on a separate sheet of paper.
- The cost is 20p per word, with a minimum of 10 words.
- We GUARANTEE your ad will appear in the December issue (on sale November 7) providing it is received by October 4.

HARDWARE, SOFTWARE & PERIPHERALS AT DISCOUNT PRICES

| | | | |
|-----------------------------------|------|-------------------------------------|----------------------|
| Master 128K | £414 | Master Compact+Mono monitor | £500 |
| Master Compact | £400 | Master Compact+Colour monitor | £625 |
| Master Compact+TV modulator | £435 | New Archimedes | phone for best price |

PRINTERS

| | | | |
|-------------------------------|------|---|------|
| MP135 (135 cps 80 col.) | £165 | (All printers are supplied with lead-state model) | |
| MP165 (165 cps 80 col.) | £195 | MP201 (200 cps 132 col.) | £335 |
| MP200 (200 cps 80 col.) | £295 | DMP3000 (105 cps 80 col.) | £175 |

MONITORS

| | | | |
|--------------------------|------|-----------------------|------|
| Microvitec 1431 MS | £225 | Philips CM 8833 | £270 |
| Microvitec 1451 MS | £255 | | |

MODEMS

| | | | |
|-------------------------------------|------|-----------------------------|------|
| Nightingale with Commstar rom | £90 | Miracle WS4000 professional | |
| Pace Linnet V21/23 | £135 | V21/23 professional | £290 |
| Miracle WS4000 V21/23 | £160 | Commstar rom | £30 |
| Pace Series 4 2123S V21/23 | £255 | | |

DISCS

| | | | |
|----------------------------|--------|--------|--------|
| | 10 | 25 | 50 |
| 5.25" DS/QD 80 track | £7.00 | £15.00 | £25.00 |
| 3.5" DS | £15.00 | £35.00 | £60.00 |

EDUCATIONAL PROGRAMS

| | | | |
|--------------------|--------|------------|-----------|
| | Tape | 5.25" disc | 3.5" disc |
| Typing Tutor | £12.95 | £14.95 | £15.95 |
| Early Maths | £7.95 | £9.95 | £10.95 |
| Early Words | £7.95 | £9.95 | £10.95 |

NEW AMSTRAD PCW 9512 WORDPROCESSOR:

At last the new PCW model with a 20 cps daisywheel printer, Locoscript 2, LocoMail, LocoSpell, CP/M Plus etc.

RSP £499 + VAT. Our Price £459 + VAT

Lower Prices on PCW 8256 & 8512 models

PCW 8256 - RSP £299. Our Price £275 + VAT

PCW 8512 - RSP £399. Our Price £375 + VAT

AMSTRAD PC1512 RANGE AT LOWER PRICES:

(Single & Double Drive models include free Migent Ability+4 US Gold games)

Prices start at only £379 + VAT

This is a sample of our extensive range. Please ask if the product you want is not listed.

ALL PRICES INCLUDE VAT

Send cheques to:

WILLOW SOFTWARE
Mail Order Dept (MU 1)

The Willows, Wrington Lane, Congresbury, Bristol BS19 5BQ
Tel.: (0934) 876031 (2 lines & Ansaphone out of hours)

Offers available for a limited period & subject to availability.
Phone for best price - we always try to give you the best deal



CLP

| PAPER | PER BOX | 1 BOX | | 5 PLUS | LABELS | IMPERIAL | 1000 | 5000 |
|----------------|---------|--------|--------|--------|----------------------|---------------|-------|--------|
| | | 1 BOX | 5 PLUS | | | | | |
| 11x9.5 | | | | | 1/2 VERTICAL SPACING | 3 1/2 x 1 1/2 | £4.10 | £17.00 |
| 60 GSM PLNMUS | 2000 | £11.90 | £ 9.83 | | 2 WIDE | 4 x 1 1/2 | £4.40 | £18.50 |
| 60 GSM MICRO P | 2000 | £12.40 | £10.86 | | | 5 x 1 1/2 | £5.40 | £20.30 |
| 70 GSM MICRO P | 2000 | £13.90 | £11.92 | | | 3 1/2 x 1 1/2 | £4.10 | £17.00 |
| 70 GSM PLNMUS | 2000 | £13.10 | £11.12 | | 3 WIDE | | | |
| 2PART NCR | 1000 | £19.53 | £15.93 | | 1/4 VERTICAL SPACING | 3 1/2 x 1 1/2 | £4.20 | £16.00 |
| 11x14.5 | | | | | 1 WIDE | 3 1/2 x 1 1/2 | £4.10 | £17.00 |
| 60 GSM PLNMUS | 2000 | £17.00 | £12.85 | | | 4 x 1 1/2 | £4.40 | £18.50 |
| 70 GSM PLNMUS | 1750 | £17.40 | £12.74 | | | 3 1/2 x 1 1/2 | £3.00 | £11.50 |
| TRUE A4 | | | | | 2 WIDE | 4 x 1 1/2 | £5.50 | £17.50 |
| 90 GSM | 1500 | £17.90 | £16.09 | | | 2 1/2 x 1 1/2 | £4.10 | £15.00 |
| 70 GSM | 2000 | £19.50 | £14.40 | | 3 WIDE | 3 1/2 x 1 1/2 | £5.50 | £22.00 |

RIBBONS

| | 1-5 | | | 1-5 | |
|---------|------------------|------|--------|------------------|------|
| | 1-5 | 1-5 | | 1-5 | 1-5 |
| Amstrad | 8512/85256 | 3.71 | Epson | MX/FX/RX1000/105 | 3.15 |
| | Coloured | 4.82 | | Coloured | 4.23 |
| | Longlife | 4.76 | | LQ/LP 1500 | 2.95 |
| | Coloured | 6.27 | | LQ2500 | 4.83 |
| Brother | M1009 | 3.10 | | Coloured | 3.60 |
| | Coloured | 4.45 | Shinwa | CP80 | 3.78 |
| | HR15/25/35 | 3.03 | | Coloured | 5.01 |
| | Coloured | 3.81 | Star | Gemini 10/15 | 1.40 |
| Cannon | PW1156/1080 | 2.89 | | Coloured | 1.90 |
| Epson | FX/MX/FT/RX80/85 | 2.75 | | NL10 | 4.63 |
| | Coloured | 3.81 | | Coloured | 5.80 |
| | LX80 | 2.52 | | Radix 15 | 2.65 |
| | Coloured | 3.50 | | Coloured | 4.45 |

* More quantity - More discount *

* All prices inc. delivery - Just add VAT *

* Send for new catalogue many new lines *

* Try us for size *

Phone CLP on (0258) 89 400



Freeport Blandford Dorset DT11 7BR



Telecom Gold Box 72: MAG 70253

MAD CHRISTMAS SALE BUY WHILE STOCKS LAST

5.25" COMPUTER DISKS . BULK PACKED . TOP QUALITY

| QTY | SS 48TPI | SS 96TPI | DS 48TPI | DS 96TPI | DS 48 C/R | DS 96 C/R |
|---------------|----------|----------|----------|----------|-----------|-----------|
| 10 (in a box) | £5.95 | £8.95 | £8.95 | £7.95 | £8.95 | £9.95 |
| 25 | £10.99 | £11.99 | £11.99 | £12.99 | £14.99 | £17.99 |
| 50 | £19.99 | £20.99 | £20.99 | £21.99 | £27.99 | £32.99 |
| 100 | £36.99 | £37.99 | £37.99 | £41.99 | £45.99 | £57.99 |
| 150 | £52.99 | £55.99 | £55.99 | £57.99 | £63.99 | £80.99 |
| 250 | £85.99 | £87.99 | £87.99 | £91.99 | £103.99 | £126.99 |

C/R = Coloured or Reversible disks - reversible disks have two holes and two notches! These disks are packed with a protective jacket (envelope) and come with a full user set, including a label and a write protect tab. The disks are manufactured to top international standards and have a hub ring for added protection.

3.5" COMPUTER DISKS

BULK PACKED with labels etc.

| QTY | SS 135TPI | DS 135TPI | Lockable Storage Boxes from Centec |
|---------------|-----------|-----------|------------------------------------|
| 10 (in a box) | £14.95 | £18.95 | 3.00" Lockable-Holds 25 £7.99 |
| 25 | £29.95 | £35.95 | 3.00" Lockable-Holds 60 £9.95 |
| 50 | £55.95 | £62.95 | 3.50" Lockable-Holds 40 £7.99 |
| 100 | £105.95 | £119.95 | 3.50" Lockable-Holds 90 £9.95 |
| 150 | £149.95 | £169.95 | 5.25" Lockable-Holds 50 £7.99 |
| 250 | £239.95 | £269.95 | 5.25" Lockable-Holds 100 £9.95 |

50 5.25" DSDD 96TPI Disks with lockable storage box £24.95

50 3.50" DSDD 135TPI Disks with lockable storage box £64.95

10 3.00" CP2 Disks for Amstrad etc. £19.49

Please inquire for the best prices of listing paper

COMPUTER MONITORS - FULL RANGE STOCKED -

BEST PRICES

| | |
|--|---------|
| Philips CM8833-Colour Monitor IRGB for Nimbus/BBC/Atari etc* | £269.95 |
| Philips CM8802-Colour RGB/TTL/Linear Inputs* | £299.95 |
| Philips BM7602-High Res Green Screen Monitor - Composite | £79.95 |
| Philips BM7622-High Res Amber Screen Monitor - Composite | £89.95 |
| Microvitec 1431-Standard Resolution Colour Monitor* | £179.95 |
| Microvitec 1451-Medium Resolution Colour Monitor* | £229.95 |

* Comes With Free Cable

REMEMBER - All monitors are delivered free by Securicor! No extra to pay!



CENTEC ELECTRONIC SYSTEMS LTD
UNIT 3, THE METRO CENTRE
BRIDGE ROAD, ORPINGTON, KENT BR5 2BE
TEL: (0689) 35353 (6 Lines) (24 hours)

Remember - all prices include VAT and delivery!
There are no hidden extras to pay!



DELTA COMPUTERS

BBC MASTER SERIES

| | |
|---------------------------|----------------|
| Archimedes | Ring for price |
| Master 128 | £395.00 |
| Master Turbo Module | £115.00 |
| Master Compact Entry | |
| System | £415.00 |

OPUS DISC DRIVES

| | |
|-----------------------------|---------|
| 5802 400K DS DD | |
| 40/80T. | £104.95 |
| 5802DB Dual 800K | |
| 40/80T. | £204.95 |
| 5802D as 5802DB+PSU | £234.95 |
| Opus DDOS (With a drive) .. | £40.00 |

PRINTERS (inc lead)

| | |
|--------------------------|---------|
| Epson P-40 | £49.95 |
| Citizen 120D | £179.00 |
| Star NL-10 | £237.00 |
| Panasonic KX-P1081 | £169.00 |
| Amstrad DMP3000 | £179.00 |
| Amstrad DMP3160 | £199.00 |
| Brother HRS | £69.99 |

PRINTER RIBBONS

| | |
|----------------------------|-------|
| Brother M1009 | £3.25 |
| Canon PC1080A | £3.25 |
| Epson FX,MX,RX 80 | £2.70 |
| Epson LX80, LX86 | £2.70 |
| Epson FX, MX, RX 100 | £3.35 |
| Panasonic KX-P1081 | £3.99 |
| Citizen 120D/LSP10 | £4.60 |
| Citizen MSP10,20 | £2.70 |
| Citizen MSP15,25 | £3.25 |
| Kaga 810 | £3.25 |
| M Tally MT80 | £3.50 |
| Seikosha GP100/250 | £2.65 |
| Shinwa CP80 | £3.50 |

SPECIAL OFFER

| | |
|--------------------------|---------|
| Electron | £49.99 |
| Electron+Plus1+View+ | |
| Viewsheet | £79.99 |
| Tatung Std Monitor | £169.00 |

All orders over £100 receive free Touchpad for BBC worth £49.95 (while stocks last).

MINIMUM ORDER £10.00

All prices include VAT



Please add £5 carriage on orders over £100

Mail Order only at this address

Trade and Educational enquiries welcome

85 Union Street Oldham Lancs

061-626 3841



LETTERS

£10 Prize letter

ONE feature of mainframe computers that is easily duplicated on a BBC Micro is the single key way of saving files using successive generation numbers. This can easily be achieved if you define a function key as follows:

```
*KEY 0 M%=(PAGE+3)-2IM VX
=VAL(CHRS(M%?PAGE))*10+VAL
(CHRS(M%?(PAGE+1)))+1IM M%
?(PAGE+1=ASC(STR$(V% MOD 1
0)))IM M%?PAGE=ASC(STR$(V%
DIV 10))IM SAVE $(PAGE+5)IM
```

Put the program name in the first line of the program in a REM statement. This can also include drive and directory specifications so it takes the form:

```
10REM : DRIVE, DIRECTORY, NAME
```

Under the DFS the filename can be up to seven characters and you must make the last two numeric for the method to work.

Valid first lines are:

```
10REM :1$.PROG01
10REM A.PNAME22
10REM P11
```

Under the ADFS, program names can be up to 10 characters and again you must make the last characters numeric giving first lines like:

```
10REM:0$.PROGRAMS.GAMES. TE
STIPROG00
10REM MYPROG23
```

Now when the function key is pressed it adds 1 to the number contained in the last two characters of the first line – it is important not to have any spaces after the numeric characters – and saves the program by passing the string after the REM token to the operating system.

This system allows generation numbers of 00 to 99 but by changing the parameters in the function key definition other ranges could be used, especially under ADFS with its 10 character filenames.

A further refinement is to lock the file once it has been saved to prevent accidental erasure or corruption. If you

Single key file saving

have Basic II or above this is accomplished by adding one of the following lines to the end of the function key definition.

For DFS:

```
OSCLI"ACCESS "+$(PAGE+5)+
" L"IM
```

For ADFS:

```
OSCLI"ACCESS "+$(PAGE+5)+
" WRL"IM
```

The easiest method of using this system is to create a development disc and set the function key definition up in the boot file and EXEC it, but it can be put in a utility program or entered direct. – **Judith Ann Lucas, Gateshead.**

Considering a Master

I AM considering changing my Model B to BBC Master 128. Could readers of The Micro User give me their opinion whether they think this is a worthwhile upgrade.

I have accumulated a lot of software on disc and files including ones from View and Wordwise. Would I still be able to use these on a Master? – **R. Gray, Norwich.**

● You would be able to use your View and Wordwise files on a Master but some software would not work. If any readers send their opinions we'll publish them in a future issue of The Micro User.

Paltry packages

THE requirement nowadays is for games to be addictive, value for money and cheap. But the only way some companies seem to achieve this is by cheapening the cassette package itself.

I have lost count of the number of times that tapes

only load properly on the first run. From then on, it is Rewind tape, Data? and garbled loading information.

The reason is possibly two-fold, the tape is of poor quality and therefore stretches or the cassette is badly designed and slows the running of the tape.

Both faults produce slurred signal reproduction to the computer. Either a great deal of patience or rehousing of the tape to a proven cassette are the answer. – **Tony Manning, Wirral, Merseyside.**

● Actually there is a much more likely reason for your one-run tapes. The head of your tape player has become magnetised (as they all do eventually) and is corrupting the tape as it winds through.

All you need to do is borrow or buy a de-magnetizer and use it on your tape head. Also make sure your tape is playing back at the correct volume.

Unassembling assembler

I HAVE been having some difficulty with Nigel Reed's short assembly language program published on page 155 of the December 1986 issue of The Micro User.

When I run the program on my Master 128, it won't assemble the machine code beyond line 460. I know nothing about assembly language. So what's wrong? Can you help? – **D. Stewart, East Finchley, London.**

● The PAGE setting (where your Basic program is put) for the Master is at &E00 and the machine code in this program is assembled at &1200.

This means that the code is overwriting your variables or your program.

Change lines 80 and 500 as follows:

```
80 PX= &C00
500 ?&20F=&C
```

Win a tenner

● Want to write to The Micro User? The address is: Letters, The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY. Writers of the most interesting letters receive a £10 prize.

Activating Imogen

If you have an Opus Challenger here's how to get Imogen working. Insert the disc into drive 0 and type in the following:

```
*FORMAT
4
0
F
*COPY 0 4*. *
*DRIVE 4
*TITLE 'IMOGEN'
*OPT 4,2
*LOAD !BOOT
?&1237=1
*SAVE !BOOT 1234 +934
*LOAD G
?&3CC3=1
*SAVE G 1234+2FF2 3C06
*CONFIG 4=0 0=4
```

Now press Control+Break, followed by Shift+Break to load the program.

The reason that this works is that Imogen performs *OPT 0,0 in files !BOOT and G. Challenger will not accept this and produces a Bad Option error. The changes set Imogen to run on ram disc 4, and alter all the *OPT 0,0s to *OPT 1,0s.

Now, can anyone help me? I'd like to know if there is an OS location or a small routine to tell me where the raster is on-screen at any given time. I need to know this to prevent sprite flicker. – **Ian Grimstead, Downend, Bristol.**

● You shouldn't need to know

Turn to Page 144 ►

LETTERS

◀ From Page 143

where the raster is to prevent flicker. There was a series of articles about writing games in *The Micro User* from January to May.

It was written by Roland Waddilove and in it he covered several techniques, including how to produce flicker-free sprites.

Star commands from Basic

I OWN a BBC Micro 32k with 1.2 OS Basic I, Acorn 1.2 DFS and Cumana 40 track disc drive and would like to know how to give disc commands from within a Basic program by typing the filename, drive and any other necessary data.

I would also like to know if upgrading to 64k would stop certain programs working. — **Matthew Allen, Bury St. Edmunds, Suffolk.**

● All star commands can be issued from Basic like this:

```
10 *ACCESS FRED L
```

but you cannot use variables like file\$. Basic II provides a command, OSCLI, which

allows you to create a string using variables and have that executed as a star command:

```
10 file$="FRED"
20 OSCLI "ACCESS "+file$+" L"
```

But for Basic I we need to create a procedure to do this for us:

```
10 file$="FRED"
20 PROCoscli("ACCESS "+file$+" L")
30 END
1000 DEF PROCoscli($700)
1010 LOCAL X%,Y%,Y%=7
1020 CALL &FFF7:ENDPROC
```

In answer to your other question, adding sideways ram (in 16k blocks) to your Model B would cause no problems with most boards. However some shadow screen boards do cause problems and some software fails to run on a B+ or B+128.

Impressive graphics

I HAVE witnessed the graphics demo of the Archimedes on display at Watford Electronics and I am impressed. The speed of the machine when handling very high resolution,

multicoloured graphics is incredible.

The most impressive bit for me is the machine code. I have a book on the assembler, which is far simpler in concept than any micro I've yet written code for.

Although there are very few operations, the way an op-code can be specified allows incredible scope for imagination — at frightening speeds.

The processor is able to run at 14 mips (million instructions per second), but the Archimedes can only chug along at around 4 mips when accessing rom and 8 mips on ram or internal registers because it is slowed down by the memory itself.

The actual instructions are so powerful though:

```
ADDNES R0,R1,R2,LSL #2
```

This equates to: If (zero flag is clear) THEN (R0 = (R2-times 4) + R1) (Flags set on result, carry ignored for calculation). Note: R0, R1 and R2 are 32 bit registers, NE is not equal condition, S means set flags on result.

```
ADCAL R0,R0,R0,LSL #1
```

which means: R0 = 3 x R0 +

carry.

Note: AL meaning always, ADC add with carry, no S means flags remain unchanged. LSL#1 shifts the second operand left by one bit (multiply by two) before addition.

So the instructions are all conditional, which makes a lot of conditional branches redundant. The operation only affects flags if specifically required to do so, and the right hand operand can be pre-barrel, shifted by 32 bits during a single instruction.

Considering all the operating system calls, the stack type memory handling instructions, the instructions seem almost as powerful as a high-level language, which probably explains the incredible speed Basic runs at.

From the meagre details I have already gleaned, I reckon Archimedes will soon become the standard by which all other micros will be measured and I wish I had one on my desk right now.

But I'll just have to wait till my 100000 pennies are in the bank. After that I suppose the queue will take me well into 1988.

Anyway, when you get yours, let me know what I'm missing, and maybe you can convince my other half that it's far more important than her new microwave and/or the caravan. — **Brian Vallot-Lewis, via MicroLink.**

Cursor correction

I'D just like to clear up one of the points raised in John Herbert's letter in your August issue:

*FX4,1 does not allow the cursor keys to be defined like the function keys, as he suggests. *FX4,2 is the correct call.

*FX4,1 makes the cursor keys return Ascii values, allowing them to be detected using Basic's GET statement, which is useful in some situations.

A well-written program should always use a *FX4,0 command to reset the cursor keys when it finishes or is interrupted by Escape.

Still on the subject of

£10 Prize letter

Out dammed spot...

IN the September issue of *The Micro User*, Andrew Smith asked for help with a problem with his printer which was leaving smudges on the paper. After many months of experiencing the same problem with my Star DP510 printer, I was considering buying a new NLQ model. After all I

had had five good years from it anyway, especially with multi-toned screen dumps.


One last look at the problem I thought. I removed the print head and a small piece of plastic fell to the ground. Inspecting it told me that it was a guide that held the nine firing pins in a vertical line

and should fit into a recess on the front of the print head as can be seen in the diagram.

I tried to replace it but it wouldn't fit properly because of all the ink and ribbon debris that had accumulated behind it over the years. In fact the bottom of the guide was at least 1mm out of line and this would produce the type of rubbing pattern I was getting.

After carefully cleaning it with cotton buds and a non-acetone based spirit cleaner I re-fitted the piece of plastic without forcing it as the slot for the firing pins is very small. I had thought of a drop of superglue but caution overcame me so I replaced the head.

The fault was cured — no more ribbon rub and no more spots. — **Rod Holt, Basildon, Essex.**

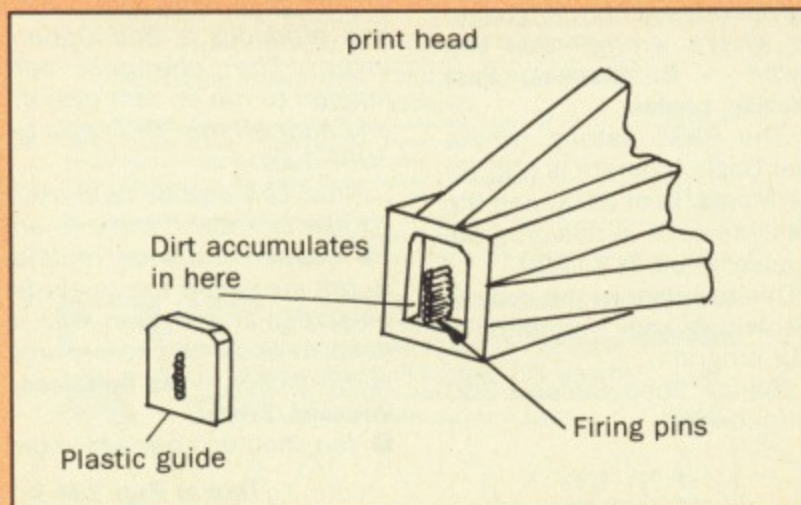

LETTERS

editing, I find the slowness of the copying action annoying, especially when working with long program lines.

A useful tip regarding this is to use *FX12,4, which decreases the auto-repeat period, effectively making this process much faster. The effect on normal typing is minimal. — Jonathan Temple, Nottingham.

Using checksum program

I AM a beginner with very little knowledge of computer programming. The first issue of The Micro User I bought was the July issue. I typed in various programs unaware how Get It Right! worked.

Then a friend lent me the June issue of The Micro User and to my delight found the Basic checksum program, which I typed in. It works fine.

My problem is how do I check programs I have already typed in and saved. It works all right when I load it into memory at PAGE=&7000 but when I load anything else it wipes out all existing programs including the checksum program.

Please can you help as I have a lot of programs already on disc that need checking. — Ian Hambelton, Surrey.

● Before loading another program, type PAGE=&1900. Then before you run the checksum program reset PAGE to &7000. You can switch between the two programs in memory by just altering the PAGE setting, and typing OLD.

Five minute drum beat

AFTER typing in Huw Woolley's 10 minute game in the July issue of The Micro User I decided to try and go one better and write a five minute program that fits on one line.

This is a vaguely useful program that turns the BBC Micro into a simple drum machine, with a maximum storage capacity of 1000 beats. The keys Z and X sound the drums, and Q will replay your rhythm. Any other key will

cause the program to end.

The program could be greatly enhanced, but this would make it much longer (and hence add to finger ache).

```
10 DIMA(999),B(999):A=0:
D=0:REPEATTIME=0:G=GET:B(D)
=TIME:IFG=88SOUND0,-15,12,1
:A(D)=12:D=D+1:UNTILA=1:ELS
EIFG=90SOUND0,-15,5,1:A(D)=
5:D=D+1:UNTILA=1:ELSEIFG=81
FORZ=0TO(D-1):TIME=0:REPEAT
UNTILTIME=B(Z):SOUND0,-15,A
(Z),1:NEXT
```

— Richard Tate, Heaton Moor, Stockport.

Introducing garbage

I'M flattered that my contribution, Decimal Revealed, in the August issue of The Micro User is regarded as being prizeworthy, but may I draw your attention to two small omissions that crept in to the letter as printed.

Preferably, the VDU 1 command (send to printer only) should precede the final parameters of both the reverse paper and margin commands. Unfortunately in lines 34 and 35 they were omitted.

The micro will therefore regard those parameters as mere Ascii characters and print them to screen as garbage.

Moreover, my MT85 printer does not always recognise the final parameter as part of the printer command unless that VDU 1 is present — a garbled printout may result.

To avoid such problems, readers should amend line 34 to read:

```
FOR A=1 TO 6:VDU 1,27,1,10
6,1,252:NEXT:VDU 1,27,1,10
8,1,48
```

— John Henson, Dundonald, Kilmarnock.

Centring text

WHEN programming I found that placing text on a line took me quite a while before it was in the perfect place.

Here is a short procedure to centre your text on a line if

Multiple variables

£10 Prize letter

I HAVE been using John Kelk's excellent Variable Compressor since it was published in the February issue of The Micro User. It recently occurred to me that it produces many variables beginning with the same letter — contrary to the advice given on page 194 of the User Guide.

The naming sequence a to z; aa to az; ba to bz and so on. For example, in a program with 70 variables, 27 will begin with a (a and aa to az), 19 with b (b and ba to br) and one each with c to z.

Altering the lines shown changes the name sequence

to a to z; aa to za; ab to zb and so on. Now a 70 variable program would have them distributed so that only three begin with each of the letters a to r and two each from s to z.

```
2092 LDY ynew
2094 TXA
2096 STA (base2),Y
2098 INY
2110 :
2150 :
2160 :
2170 STY ynew
2200 STX pfirst+1
2242 .pfirst
2244 LDA #0:JSR oswrch
2280 .single
2290 :
4560 DATA as Line,10020
```

— M. J. Newsome, Worthing, West Sussex.

you enter the message, the vertical tab and the mode. Lines 10 to 100 are a demonstration routine to show that the procedure following them works.

```
10 REM Centre Text
20 REM By S. Hill
30 FORMo%=0T07
40 MODEmo%=VDU23,1,0;0;0;0;
50 PROCct('Centred',3,mo%)
60 PROCct('Text',5,mo%)
70 FORdeL%=0T04000:NEXT
80 NEXT
90 END
100 :
110 DEFPROCct(str$,vtab%,mode%)
120 LOCALa%,b%,c%
130 IFmode%=0 OR mode%=3
a%=39
140 IFmode%=1 OR mode%=4
OR mode%=6 OR mode%=7 a%=19
150 IFmode%=2 OR mode%=5
a%=9
160 b%=LENstr$/2:c%=a%-b%
170 PRINTTAB(c%,vtab%);str$
180 ENDPROC
```

Also, lines 1750 and 1760 of Soccer Manager in the September issue of The Micro User are wrong because you can't enter player number 50 in a match. If the 50s in the lines are changed to 51s the program works perfectly. — Saul Hill, Sale Moor, Cheshire.

Wrong number

IN THE July issue of The Micro User magazine you printed an article in the news section on Chestnut Software and its products. The telephone number contained in the article was unfortunately incorrect. The correct number is 01-303 2981. — Colin Chappell, Chestnut Software, Bexleyheath, Kent.

Star commands with Master 128

IN THE November 1986 issue of The Micro User there is a utility for creating star commands to use with a printer. This program would be extremely useful for me but I can't seem to make it work.

I entered the program as printed, I got all the correct responses and *SAVEed a file as called for. But when I try the test program the only response I get is BAD COMMAND at line 10.

I have a Master 128 with Turbo co-processor and an MP165 printer. Have you any

Turn to Page 146 ▶

LETTERS

◀ From Page 145

suggestions what could be going wrong? — **C.M. Williams, Essex.**

● If you have saved the code using the addresses given it will re-load into the co-processor and not work. To ensure it loads back into the host machine, just precede the addresses given with FFFF as you save it (for example FFFF0900).

No Language

I AM currently engaged in trying to make my BBC Micro enter the No Language Environment (NLE). I know that this is possible with 6502 2nd Processor, with the BBC Master Range, and even with the Archimedes 300 series.

I have scoured the Operating System and have found very little, except the Language? error. This is available by calling locations around and including &DBDO.

On my travels I have also discovered the error key in use. How can I generate this error, as the function keys are not write protected? — **Ben Byram-Wigfield, Brimfield Common, Nr. Ludlow.**

● The Model B and B+ cannot enter the No Language Environment and in the event of no language being in the machine they generate the Language? error and hang up.

The Key in use error can be generated like this:

```
*KEYO*KEYOHELLO I I M-
I MHELLO I M
```

then press f0.

Scrolling problem

I HAVE every issue of The Micro User and I enjoy the problem and letter pages most. Unfortunately, I now have a problem of my own.

The program shown runs correctly until period 20, then the format breaks up with numbers carrying on different lines. Can you please explain why?

ALL programs printed in this magazine are exact reproduction of listings taken from running programs which have been thoroughly tested.

However, on the rare occasions when mistakes occur corrections are published as a matter of urgency. Should you encounter error messages when you type in a pro-

gram, they will almost certainly be the result of your own typing mistakes.

Unfortunately we can no longer answer personal programming queries concerning these mistakes. Of course letters about suggested errors will be investigated without delay, but any replies found necessary will only appear in the mail pages.

```
500 DIM Y(53),date$(53)
510 CLS
520 PRINT"Now enter yo
ur data"
530 PRINTSPC(2);"Period
";SPC(8);"Value";SPC(12);"
Date"
540 FOR T=1 TO 53
550 IF T<10 PRINT " ";
560 PRINTTAB(4,T+4);T:I
NPUT TAB(15,T+4)Y(T):INPU
TAB(31,T+4)date$(T)
570 NEXT
```

— **A. Seddon, Merseyside.**

● The problem is that at period 20 the program reaches the bottom of the

screen and this then starts to scroll.

Copy Protection

HOW can I protect my programs from being LOADED into the computer and LISTED.

— **Adam Smith, Boylestone, Derbyshire.**

● If we were to explain how to do this, then anyone reading the magazine could work backwards and discover how to un-protect it.

There was a disc protection system described in the April

1987 issue of *The Micro User* and you could use that to safeguard your programs.

Random error

IS there a mistake in the Random Number Generator listing on page 55 of the September issue of *The Micro User*?

Having typed in the listing and corrected some errors, I finished up with an error out Line 700 — No such variable. It was fairly obvious that something is missing after $P\% = P\% + LEN$. So I added $LEN(E\$)$, but to no avail.

Altering Line 190 to produce a listing of PROCassem shows that assembly does not continue after line 650. Can you please explain why? — **W.E. Gander, Henfield, West Sussex.**

● There is an error — the end of line 700 has been omitted: It should read:

```
700 P%=P%+LEN(E$):=LX
```

The 1010 Commandments

0001 Thy written invocation shall contain no more than two GOTOs: One shalt be for ONERRORGOTO who saves our dignity and the second shall be for the return from ONERRORGOTO.

0010 Blessed be the Proc of the Basic of the Beeb and banish Gosub from thy sight lest thee spend many an accursed hour battling the minor demons and bugs that will infest thine invocation.

0011 The naming of thine Vars and Procs and Funs shall be meaningful and in little letters so that at the Day of Judgement thy creation shall be readable.

0100 Remember that the Keyboard Master is wild and unruly and without thought and his buffers must be cleared often and wisely.

For thee, Writer of Machine Invocations

0101 Useth thee only the spells of Mighty Acron that have been documented. For if

thou turnest away from these when the Mighty Acron blesses thee with a new machine thine invocation shall up-hang.

0110 When thou changest vectors thou do so at thine own peril. Be wary and set all the wards and store thee an ancient copy of it and jump thou to it as in a chain of daisies else the Great Machine will come upon thee and crash.

0111 Assemblest thy code twice in succession, placing it in some peaceful eddy where it is not afflicted by the changing values of the memory currents.

1000 Save the incantation of thy spell on a disk, tapet or scroll so that if thy spell turns madly and devours itself thou wilt be empowered to resurrect it in whole.

To become a true follower of Acron

1001 Thou must program, debug and learn about thy

machine all the while and resist thee the awful temptations of the demon Games. For these will steal away thy hours and leave thee in bewilderment and frustration and thou shalt learn nought save when to smart-bomb the enemy.

1010 And in ultimo, thee must do but two things: Primus, uphold above all others the 6502 and her sisters, but speak quietly of 65C816 who has turned from the path of simplicity and clarity, and upon a pedestal place the Acron Risc.

You must shun the devils Z80, 8086 (and his brother 8088) also those devils incarnate of complexity ni plus ultra 80386 and 68020. Secundus, save thy groats and shekels so that thee may take out a subscription to the oracle of all the followers of Acron: the great prophet The Micro User.

Scribed by Lawrence Angrave of the Shire of Buckingham.

Learning CAN be fun

- Use your BBC Micro or Master to teach and amuse your children at the same time.
- Three packages crammed full of educational programs – and so easy to use!
- Each program has been educationally approved after extensive testing in the classroom.

Reduced prices!
 £3.95 tape
 £4.95 5 1/4" disc
 £6.95 3 1/2" disc



- Ages 2-5**
- Alphabet
 - Colours
 - Counting
 - House
 - Magic Garden
 - Matchmaker
 - Numbers
 - Pelican
 - Seaside
 - Snap



PELICAN
 Teach your children to cross the road safely at a Pelican crossing



HOUSE
 Select the colours to draw a house – hours of creative entertainment

- Ages 5-8**
- Balance
 - Castle
 - Derrick
 - Fred's Words
 - Hilo
 - Maths Test
 - Mouser
 - Number Signs
 - Seawall
 - Super Spell




NUMBER SIGNS
 Provide the correct arithmetic sign and aim to score ten out of ten



BALANCE
 Learn maths the fun way. Type in the answer to balance the scales

- Ages 8-12**
- Anagram
 - Codebreaker
 - Dog Duck Corn
 - Guessing
 - Hangman
 - Maths Hike
 - Nim
 - Odd Man Out
 - Pelmanism
 - Towers of Hanoi

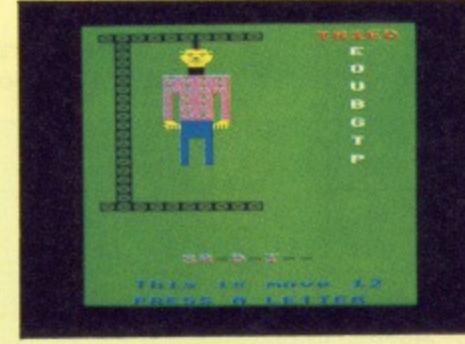

HANGMAN
 Improve your child's spelling with this fun version of the popular game



ODD MAN OUT
 Find the word that does not fit – before your time runs out

TO ORDER TURN TO THE FORM ON PAGE 149

Drive into a new dimension!

Grand Prix Construction Set from Superior Software is an all-action racing game with a difference.

Using the built-in editor you can design your own circuits by choosing from a range of bends, chicanes, hump-backed bridges and more.


But to get you started there are 18 pre-defined race-tracks for you to try out.

Together with the one or two-player option, and the spectacular split-screen view, this has to be one of the most exciting games for the BBC Micro in a long time!

'The construction set is excellent, and the race section...has sufficient thrills and spills to keep you on the edge of your seat.' – James Riddell, The Micro User, June 1987



SAVE UP TO £5

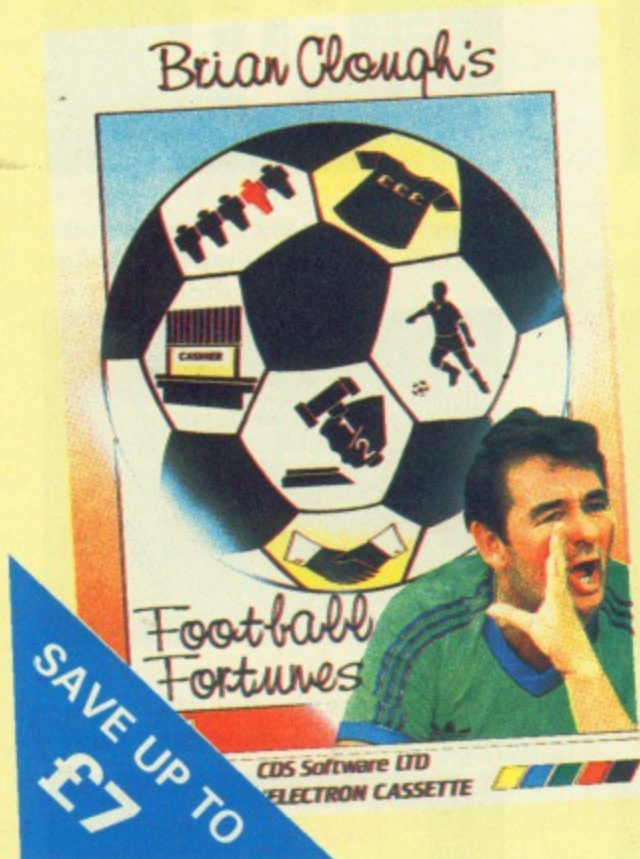

SAVE UP TO £7

Play football's first interactive computer and board game!

Brian Clough's Football Fortunes is an exciting football management game with a difference – it combines an excellent range of computer-based features with a fascinating board game.

The result for the players is a package which is as much fun and as skillful to play as other best-selling board games, combined with the flexibility and speed of play which only a computer can supply.

Up for the Cup!

- CONTENTS INCLUDE**
- BBC software
 - Playing board
 - Five coloured counters
 - 112 Player cards
 - 10 spare Player cards
 - Six immunity cards
 - Pack of money

- FEATURES**
- Two to five players
 - Four skill levels
 - Variable game length
 - Computer die
 - Teleprinter
 - Constantly updated league tables
 - Assessments of each manager's performance

'A great family game – and no crowd trouble!'
Niels Reynolds, The Micro User, July 1987

| Suitable for | Product | Format | RRP | Special reader offer | YOU SAVE | Offer including subscription | YOU SAVE |
|--------------|-------------------------------|------------|--------|----------------------|----------|------------------------------|----------|
| BBC Micro | Grand Prix Construction Set | Tape | £9.95 | £7.95 | £2 | £19.95 | £5 |
| BBC Micro | Grand Prix Construction Set | 5.25" Disc | £11.95 | £9.95 | £2 | £21.95 | £5 |
| BBC Micro | Grand Prix Construction Set | 3.5" Disc | £14.95 | £12.95 | £2 | £24.95 | £5 |
| BBC Micro | B. Clough's Football Fortunes | Tape | £14.95 | £11.95 | £3 | £22.95 | £7 |
| BBC Micro | B. Clough's Football Fortunes | 5.25" Disc | £17.95 | £14.95 | £3 | £25.95 | £7 |

TO ORDER TURN TO THE FORM ON PAGE 149

Valid to November 30, 1987
Orders subject to availability
Please tick items in box below

Overseas orders:
ALL GOODS NOW SENT AIRMAIL

Annual subscription

| | | | |
|------------------------------|-----|------|--------------------------|
| UK | £15 | 2001 | <input type="checkbox"/> |
| Europe (incl Eire) : Surface | £25 | 2365 | <input type="checkbox"/> |
| Overseas Surface | £31 | 2366 | <input type="checkbox"/> |
| Overseas Air | £42 | 2004 | <input type="checkbox"/> |

Commence with _____ issue

Renewals

| | | | |
|------------------------------|-----|------|--------------------------|
| UK | £15 | 2002 | <input type="checkbox"/> |
| Europe (incl Eire) : Surface | £25 | 2114 | <input type="checkbox"/> |
| Overseas Surface | £31 | 2367 | <input type="checkbox"/> |
| Overseas: Air | £42 | 2113 | <input type="checkbox"/> |

Annual subscription for cassettes and discs

| | | | | | |
|--------------------------|------------------|-------------|-----|------|--------------------------|
| <input type="checkbox"/> | UK | Europe/Eire | | 2005 | <input type="checkbox"/> |
| | | Overseas | £45 | | |
| <input type="checkbox"/> | BBC 'B' cassette | £35 | £45 | 2005 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 40T | £50 | £60 | 2006 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 80T | £50 | £60 | 2007 | <input type="checkbox"/> |

Commence with _____ (state month)

Renewals

| | | | | | |
|--------------------------|------------------|-------------|-----|------|--------------------------|
| <input type="checkbox"/> | UK | Europe/Eire | | 2009 | <input type="checkbox"/> |
| | | Overseas | £45 | | |
| <input type="checkbox"/> | BBC 'B' cassette | £35 | £45 | 2009 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 40T | £50 | £60 | 2010 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 80T | £50 | £60 | 2111 | <input type="checkbox"/> |

Grand Prix Construction Set

| | | | | | |
|--------------------------|------------|-------------|------------|--------|--------------------------|
| <input type="checkbox"/> | With sub* | Without sub | NEW | | <input type="checkbox"/> |
| | | | £4.95 | £7.95 | |
| <input type="checkbox"/> | Cassette | £4.95 | £7.95 | 2058/9 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc | £6.95 | £9.95 | 2060/1 | <input type="checkbox"/> |
| <input type="checkbox"/> | 3.5" disc | £9.95 | £12.95 | 2062/3 | <input type="checkbox"/> |

* These offers only available if sent with subscription order or renewal

Brian Clough's Football Fortunes

| | | | | | |
|--------------------------|----------------|-------------|------------|--------|--------------------------|
| <input type="checkbox"/> | With sub* | Without sub | NEW | | <input type="checkbox"/> |
| | | | £7.95 | £11.95 | |
| <input type="checkbox"/> | Cassette | £7.95 | £11.95 | 2064/5 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 40T | £10.95 | £14.95 | 2066/7 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 80T | £10.95 | £14.95 | 2068/9 | <input type="checkbox"/> |

* These offers only available if sent with subscription order or renewal

Acornsoft Specials

Language Roms

| | | | | |
|--|---------------------------|--------|------|--------------------------|
| <input type="checkbox"/> | BCPL Bundle * Not ADFS | £29.95 | 2045 | <input type="checkbox"/> |
| Add £5 for Europe (inc Eire), £19 Overseas | | | | |
| <input type="checkbox"/> | Forth | £19.95 | 2046 | <input type="checkbox"/> |
| Add £2 for Europe (inc Eire), £ Overseas | | | | |
| <input type="checkbox"/> | Logo | £29.95 | 2047 | <input type="checkbox"/> |
| Add £4 for Europe (inc Eire), £15 Overseas | | | | |

Education

| | | | | |
|---|---|-------|------|--------------------------|
| <input type="checkbox"/> | ABC, Workshop, Talkback and Spooky Manor (four cassettes) | £9.95 | 2048 | <input type="checkbox"/> |
| Add £2 for Europe (inc Eire), £4 Overseas | | | | |

Music

| | | | | |
|--------------------------|---------------------|-------|------|--------------------------|
| <input type="checkbox"/> | Creative Sound Book | £4.95 | 2049 | <input type="checkbox"/> |
| <input type="checkbox"/> | Two 5.25" discs 40T | £3.95 | 2056 | <input type="checkbox"/> |
| <input type="checkbox"/> | Two 5.25" discs 80T | £3.95 | 2057 | <input type="checkbox"/> |

Add £2 for Europe (inc Eire), £4 Overseas

Games

| | | | | |
|---|--|-------|------|--------------------------|
| <input type="checkbox"/> | Revs, Revs 4 Track and Aviator (3 cassettes) | £9.95 | 2050 | <input type="checkbox"/> |
| Add £4 for Europe (inc Eire), £7 Overseas | | | | |

Micro User back issues

| | | | | | | | |
|----------|-------|------------|------|--------------------------|-----------|------|--------------------------|
| UK | £1.75 | Jan 1987 | 2410 | <input type="checkbox"/> | June 1987 | 2503 | <input type="checkbox"/> |
| Europe | £2.25 | Feb 1987 | 2411 | <input type="checkbox"/> | July 1987 | 2504 | <input type="checkbox"/> |
| Overseas | £3.75 | March 1987 | 2500 | <input type="checkbox"/> | Aug 1987 | 2505 | <input type="checkbox"/> |
| | | April 1987 | 2501 | <input type="checkbox"/> | Sept 1987 | 2506 | <input type="checkbox"/> |
| | | May 1987 | 2502 | <input type="checkbox"/> | Oct 1987 | 2507 | <input type="checkbox"/> |

Monthly cassettes/discs

| | 1986 | 5.25" disc | | | |
|-------------------------------|-------|------------|----------|----------|-----------|
| | | Tape | 40 track | 80 track | 3.5" disc |
| | | £3.95 | £4.95 | £4.95 | £7.75 |
| Witch Hunt+ Quasimodo's Quest | Oct | 2440/43 | | | |
| Maltese Cross | Nov | 2444/47 | | | |
| Santa's Sleigh | Dec | 2448/51 | | | |
| Ayo | Jan | 2452/55 | | | |
| Rhondo | Feb | 2456/59 | | | |
| Dino | Mar | 2468/71 | | | |
| Hunkie Egg | April | 2472/75 | | | |
| Duck's Dinner | May | 2476/79 | | | |
| Professor McBrolly | June | 2480/83 | | | |
| Diamond Quest | July | 2484/87 | | | |
| Survive | Aug | 2488/91 | | | |
| Soccer Manager | Sept | 2492/95 | | | |
| Arena | Oct | 2496/99 | | | |
| Dune Hunter | Nov | 2600/03 | | | |

Morley Teletext Adapter

| | | | | |
|--------------------------|--|--------|------|--------------------------|
| <input type="checkbox"/> | Teletext Adapter (40 track utilities disc) | £99.95 | 2074 | <input type="checkbox"/> |
| <input type="checkbox"/> | Teletext Adapter (80 track utilities disc) | £99.95 | 2075 | <input type="checkbox"/> |
| <input type="checkbox"/> | Power Supply | £9.95 | 2054 | <input type="checkbox"/> |

Add £4 for Europe. Add £7 for Overseas

Disc Storage Box

| | | | |
|------------------------------|-------|------|--------------------------|
| (holds up to 60 5.25" discs) | £4.95 | 2052 | <input type="checkbox"/> |
|------------------------------|-------|------|--------------------------|

Knitwear Designer

| | | | | |
|--------------------------|------------|--------|------|--------------------------|
| <input type="checkbox"/> | Cassette | £8.95 | 2031 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" Disc | £9.95 | 2032 | <input type="checkbox"/> |
| <input type="checkbox"/> | 3.5" Disc | £10.95 | 2051 | <input type="checkbox"/> |

Add £2 for Europe. Add £5 for Overseas

Nursery Rhymes

| | | | | |
|--------------------------|----------------|-------|------|--------------------------|
| <input type="checkbox"/> | cassette | £5.95 | 2070 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 40T | £6.95 | 2071 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 80T | £6.95 | 2072 | <input type="checkbox"/> |
| <input type="checkbox"/> | 3.5" disc | £7.95 | 2073 | <input type="checkbox"/> |

Mini Office II

| | | | | |
|--------------------------|--------------------|------------------------|------|--------------------------|
| <input type="checkbox"/> | BBC B, B+ | Cassette £14.95* | 2368 | <input type="checkbox"/> |
| <input type="checkbox"/> | | 5.25" disc 40T £16.95* | 2369 | <input type="checkbox"/> |
| <input type="checkbox"/> | | 5.25" disc 80T £16.95* | 2370 | <input type="checkbox"/> |
| <input type="checkbox"/> | BBC Master | 5.25" disc 80T £19.95* | 2028 | <input type="checkbox"/> |
| <input type="checkbox"/> | BBC Master Compact | 3.5" disc £21.95* | 2029 | <input type="checkbox"/> |

Instant Mini Office II

| | | | | |
|--------------------------|-----------------|---------|------|--------------------------|
| <input type="checkbox"/> | 4x32k Rom Board | £59.95† | 2372 | <input type="checkbox"/> |
|--------------------------|-----------------|---------|------|--------------------------|

* Add £2 for Europe. Add £5 for Overseas † Add £3 for Europe. Add £8 for Overseas

French on the Run

| | | | | |
|--------------------------|------------------|--------|------|--------------------------|
| <input type="checkbox"/> | BBC 'B' cassette | £9.95 | 2359 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 40T | £11.95 | 2360 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" disc 80T | £11.95 | 2361 | <input type="checkbox"/> |
| <input type="checkbox"/> | 3.5" disc | £13.95 | 2362 | <input type="checkbox"/> |

Fun School

| | Age | 1986 | 5.25" disc | | | |
|--------------------------|----------|---------|------------|----------|----------|-----------|
| | | | Tape | 40 track | 80 track | 3.5" disc |
| | | | £3.95 | £4.95 | £4.95 | £6.95 |
| <input type="checkbox"/> | Age 2-5 | 2338/41 | | | | 2076 |
| <input type="checkbox"/> | Age 5-8 | 2342/45 | | | | 2077 |
| <input type="checkbox"/> | Age 8-12 | 2346/49 | | | | 2078 |

Magic Sword

| | | | | |
|--------------------------|---------------------|-------|------|--------------------------|
| <input type="checkbox"/> | BBC 'B' Cassette | £5.95 | 2228 | <input type="checkbox"/> |
| <input type="checkbox"/> | 5.25" Disc 40T/80T* | £6.95 | 2229 | <input type="checkbox"/> |

*Add £2 for Europe. Add £5 for Overseas

Classic Card and Board Games

| | No. | 1986 | 5.25" disc | | |
|--------------------------|------|--------|------------|----------|----------|
| | | | Tape | 40 track | 80 track |
| | | | £3.95 | £4.95 | £4.95 |
| <input type="checkbox"/> | No.1 | 2460/2 | | | |
| <input type="checkbox"/> | No.2 | 2464/6 | | | |

Micro User Binders

| | | | | | |
|----|---------------|-----------------|--------|------|--------------------------|
| UK | £4.95, Europe | £8.25, Overseas | £10.25 | 2221 | <input type="checkbox"/> |
|----|---------------|-----------------|--------|------|--------------------------|

Dust Covers

| | | | |
|--------------------|-------|------|--------------------------|
| BBC B & B+ | £3.95 | 2220 | <input type="checkbox"/> |
| BBC Master | £3.95 | 2222 | <input type="checkbox"/> |
| BBC Master Compact | £3.95 | 2224 | <input type="checkbox"/> |


Readers in Europe (inc Eire) add £2. Overseas add £4 per item unless otherwise indicated

Don't forget to fill in your name and address overleaf.

TOTAL

Payment: please indicate method (✓)

Access/Mastercharge/Eurocard/Barclaycard/Visa



Cheque made payable to Database Publications Ltd.

Expiry Date

____/____

BLOCK CAPITALS PLEASE

Name _____

Address _____

Post Code _____

Tel: _____

Signed _____

Please allow 28 days for delivery

You can also order by phone, Prestel or MicroLink/Telecom Gold

- Any of the goods listed here can be ordered by telephone.
- Miconet subscribers and other users of Prestel can also use the Prestel mailbox.
- MicroLink subscribers and other users of Telecom Gold can also use the MicroLink mailbox.

Orders: 061-429 7931
24 hours
Enquiries: 061-480 0171
9am-5pm.

Prestel
Key Page 89, then send your order to:
614568383
24 hours

MicroLink/Telecom Gold
72:MAG001
24 hours


Don't forget to quote your credit card number AND your full address.

Don't forget to provide: Your address, your cheque/credit card No. If you've ordered discs have you indicated which format?

TUCK INTO FLAP

**The Micro User,
FREEPOST,
Europa House,
68 Chester Road,
Hazel Grove,
Stockport SK7 5NY.**

NO
POSTAGE
NEEDED
(if POSTED IN UK)

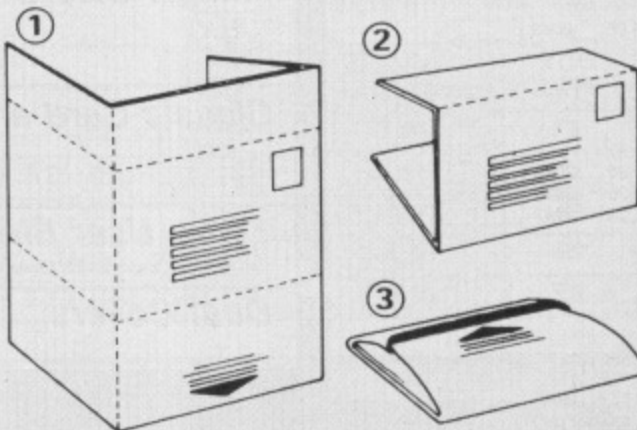

BALANCE YOUR BOOKS

with MICROLEDGER

A high quality general ledger package designed by a Chartered Accountant for maximum versatility and ease of use. Ideal for small businesses, clubs etc., as well as for home accounts. Runs on all BBC micros with 32k RAM or more. Features include:

- ☆ "Double-entry" accounting.
- ☆ Up to 99 general ledger accounts: all account names user-specified - can include VAT and sales/purchase ledger accounts.
- ☆ Up to 500 transactions per accounting period.
- ☆ Excellent budgeting facility.
- ☆ Reports include Income & Expenditure Account, Balance Sheet, Funds Flow Statement. Current period and year-to-date reporting with actual/budget comparisons. Full audit trail.
- ☆ Consolidation of two or more separate ledgers.
- ☆ Menu-driven with full prompt messages.
- ☆ Comprehensive, 30 page manual.

MicroLedger is supplied on 40 track 5.25" disk or on tape cassette for conversion to other disk media. Unrivalled value at £16.50 (incl. p&p) for disk or tape - specify which is required. Send cheque with order to Ixchel Software, 16 Meredith Road, London SW13 0DY; or 'phone 01-876 9732 for a free fact sheet.

ALL IN STOCK SUBJECT TO AVAILABILITY

S.P. ELECTRONICS

BBC SPECIALISTS

We are Acorn approved dealers & repair specialists

| | |
|---|--------------|
| ARCHIMEDES | £918.85 |
| BBC MASTER COMPACT | From £359.00 |
| BBC MASTER 128 | £425.00 |
| Disc Operating System | £75.00 |
| G3WHO Ritty Program (Tape) | £7.50 |
| G3WHO Ritty Program (Eprom Version) | £20.00 |
| Circuit Board for Ritty decoder (inc. instructions) Ritty PCB | £10.00 |
| Printer Cable (Centronics) | £12.90 |
| Citizen 120D 120cps | £199.00 |
| Data Recorder Acorn ALF03 | £30.00 |
| WORDWISE Word Processor | £33.00 |
| Wordwise Plus Word Processor | £56.00 |
| Slow Scan TV Circuit Board & Program (inc. instructions) | £17.50 |
| ADFS | £29.90 |
| 1770 DFS Kit | £49.90 |
| Opus 5802 40/80 Track Disc Drive ExPSU | £126.50 |
| Opus 5802SD 40/80 Track Disc Drive +PSU | £160.95 |

Wide selection of software, books, leads, plugs, etc. All prices only while stocks last. All available Mail Order

48 Linby Road, Hucknall, Notts. NG15 7TS
Tel: 0602 640377



Educational & institutional orders welcome

Carriage extra

ROOM 7 SOFTWARE



INVESTMENT ANALYSER

VERSION 1 £18.95
VERSION 2 £25.00

SOCCER BOSS


£11.95
Fully bound software catalogue
50p P&P
Refundable with order

POOLS CHEQUE

£12.50

Also covered by our catalogue - Soccer Boss, Pools Cheque, Investment Analyser 2, Matrix, Central Heating Calculator, Electrical Cable Selector, Structural Beam Calculator, Introduction to Statistics, Easy Banker

Letters/Cheques to: W. L. COMPUTER SERVICES, Dept. 4, First floor, H.S.L. Building, 437 Warrington Road, Rainhill, Merseyside, L35 4LL. Tel.: 051-426 9660



"STOP PRESS" / "PAGEMAKER" UTILITIES

Now available:- Two great utilities for Advanced Memory Systems wonderful desk-top publishing package.

"POSTER" . . . converts any A.M.S. page into a SUPER poster. Available in 80 track 5.25" disc only.

Price: £6.50

"FONTLIST" . . . keep a permanent record of those "can't remember what they look like" fonts. Available for Epson compatible printers only. State 40 or 80 track 5.25" disc.

Price: £5.50

Please add 50p for p&p
Send Cheque or Postal Order to:-

W. J. D. VANSTONE
P.O. Box 24, Reading RG3 3DH

BeebDOS version 1.10

from MicroBoss

Software for BBC and IBM file interchange

Runs on IBM-PC-XT-AT or compatibles and supports DOS 2.0 or later
Supplied on 360k IBM diskette with manual and plastic wallet the software includes:

| | |
|--------|---|
| BCOPY | Copy files BBC-IBM, IBM-BBC, BBC-BBC (wild cards allowed) |
| BCONV | Flexible IBM file translate facility enabling text to be passed between VIEW, WORDSTAR and Displaywrite 3 amongst other uses. |
| BGRAPH | Convert BBC mode 0,1,4,5 screen format (AMX Art included) files to IBM standard colour (CGA) for use in presentations |
| BCAT | Catalogue BBC disks |
| BFORM | Format BBC disks (boot option & title can be specified) |
| BBACK | Backup BBC disks |
| BWIPE | Delete BBC files (wild cards allowed) |
| BACC | Lock or unlock BBC files (wild cards allowed) |
| BCOMP | Compact BBC disks |
| BREN | Rename BBC files |
| BTOPT | Alter the title or boot option of a BBC disk |

£35.00

Inclusive

BBC double density diskette formats supported are Watford, Solidisk, UDM, and OPUS DDOS. Acorn single density DFS is only supported when running BeebDOS on an IBM AT or XT286 fitted with a 360k disk drive. Please send for an information sheet.

CHEQUE OR POSTAL ORDER TRADE/EDUCATIONAL ENQUIRIES WELCOME
MICROBOSS LTD 3 HADLEIGH RD FRINTON ESSEX CO13 9QQ TEL (02558) 71096

CONTRACT BRIDGE BRIDGE-MENTOR II

VERSION 1.10


"the best offering we have seen for the bridge player so far" BRIDGE CLUB REVIEW
"an ideal teaching aid" ACORN USER
"One of the best serious games programs" MICRO USER

AN IDEAL CHRISTMAS PRESENT

"The internationally acclaimed system for the COMPACT/MASTER/BBC/ELECTRON that can really improve your standard of play"

Practise your bidding: Perfect your card-play: Create your own archive of interesting hands

With high resolution colour graphics and sound, BRIDGE-MENTOR II guides you, step-by-step, through expertly analysed hands. A host of features including the spectacular "AUTOPLAY" option. The package now includes the famous "Challenge" hands archive . . . in total-over 60 testing hands to improve your game . . . with unlimited scope for more !!!

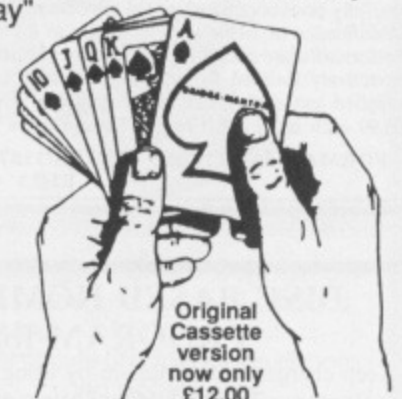

Original Cassette version now only £12.00

Now with comprehensive 24 page on-line user guide

BRIDGE-MENTOR II Version 1.10

Licensed copies available for all MASTER/BBC/ELECTRON models with 32k + DFS/DDFS and MASTER COMPACT/ELECTRON (64k +) with ADFS. Also tape-to-disc for other disc systems.

| | |
|-----------------------|--------|
| 5.25" Disc (DFS/ADFS) | £17.50 |
| 3.5" Disc (DFS/ADFS) | £19.50 |
| Tape-to-Disc | £19.50 |

Please state 40/80 track and DFS where relevant

Cheques to:- MINIC BUSINESS SERVICES,
12 WOBURN CLOSE,
BUSHEY, HERTS WD2 3XA.

Children (of all ages) playing games on BBC model B's?
You need:

SOUND VOLUME CONTROL and HEADPHONE SOCKET

Model B only

Easily fitted - no soldering

Price **£6.90** (incl. VAT & p&p)

From:

Cantocks Enterprises Ltd

25 Hillside Avenue, Midsomer Norton, Bath BA3 2LT

Account-Plus £57.44

Family History System £20.52
Payroll £57.44

Including VAT & Postage
Send for details & full brochure

Micro Aid (MU)

25 Fore St., Praze, Camborne, Cornwall
Telephone: 0209-831274 & Ask for Colin

S P I D E R 2
REAL-TIME CONTROL FOR THE BBC MICRO

Watch the SPIDER!

- Powerful new BASIC commands for invoking PROCs from the User Port, Serial Port or the Keyboard.
- 8 independent countdown timers.
- Easy to install with no soldering.
- Comprehensive manual supplied.

New SPIDER 2 features

- Special keywords for controlling the Serial Port.
- Professional implementation of Foreground/Background processing.
- Reaction timing and pulse trains accurate to 0.1 milliseconds!

from £65 including VAT


SPIDER 2 is a RAM/ROM combination which uses none of the BBC's memory, so BASIC programs are unaffected. The BBC B+ is fully supported and we supply a complete range of digital, analogue and serial interfaces for use with SPIDER using the 1MHz bus. Ask now for details.



SPIDER - stamps out I/O bugs

Paul Fray Ltd
Willowcroft, Histon Road, Cambridge CB4 3JD
Telephone: (0223) 66529

NOW AVAILABLE FOR THE MASTER



FORMAT SERVICES

5.25" DISC DISPLAY/WORK FOLDER

This product has been specifically designed for use with **DESKTOP PUBLISHING SYSTEMS**, although it can be put to many other good uses both in the home and office. Each folder opens out to reveal two rows of **unwearable** disc sleeves, 12 in total. These are carefully positioned to allow the top 30mm of each disc to be visible, thus aiding the easy identification of labels without having to thumb your way through plastic storage boxes. Folders measure 305 x 180mm approx (the same height as a normal A4 folder), and are attractively finished in red with a padded hardback cover. Extra disc labels are also supplied and each folder comes complete with its own plastic dust cover. Folders cost £6.99 each inc. P&P. Cheques/Postal Orders to:-

FORMAT SERVICES, REF MU1187, PO Box 422, X'Church, Dorset. BH23 4TA.

DISC BASED HOME BANK ACCOUNT PROGRAM for ONLY £8.95!

Keep charges to a minimum by using this program, which will maintain up to 9 separate Bank, Building Society or Credit Accounts on disc and includes the following features.

- Credits, Debits and Standing Orders
- Transfer between accounts, even as standing orders
- Account print outs including part print outs
- An inbuilt calculator.
- Information entry using simple forms with clear, easy to use displays
- Now includes statement reconciliation.

Suitable for BBC B, B+ and Master with DFS or ADFS. Please specify. Send £8.95 now for 5.25" disc and manual.

Existing users can now obtain a new program for £2.75

MALVERN SOFTWARE
4, Bastonford Villas, Bastonford, Powick, Worcester WR2 4SL.
Tel 0905 830937

FREE FREE 

SCHOOL ORDER WELCOME

Large (100 disc capacity) Lockable disc storage box worth £13.95

When you buy 25 disks (DS/DD) for only **£18.75** including VAT + postage

When you buy 50 disks (DS/DD) for only **£28.95** including VAT + postage

Alternatively buy 100 5.25" ds/dd disks certified to 96tpi for an incredible £49.95 and get the box free!!

All disks supplied are **JAPANESE HIGRADE** with unique **5** year Guarantee


5.25 DS/DD Certified to 96tpi
Subtract 51 for SS/DD. Add 107 for reversible DS/DD
Please state Japanese Higrade when ordering

FREE 3.5" Disk Offer (worth £9.95)

| QTY | SS 135TPI | DS 135TPI |
|-----|-----------|-----------|
| 10 | £14.95 | £16.95 |
| 25 | £29.95 | £35.95 |
| 50 | £55.95 | £62.95 |
| 100 | £105.95 | £119.95 |
| 150 | £149.95 | £169.95 |
| 250 | £239.95 | £269.95 |
| 500 | £459.95 | £519.95 |

90Capacity Lockable disk box for 3.5" disks when you buy 100 3.5" disks (or more) or only £2.50 when you buy 25 or £4.50 when you buy 10

All disks are supplied with full user labels

FREE SOFTWARE 

If you already have a disk box, you may like to choose a FREE (or cheap) program with your disks instead.

If you are buying 25 disks (£18.75) or 50 disks (£28.95) or 100 disks (£49.95) then choose any one of the programs below, paying only the price in brackets (many free!!)

BBC DISC 5.25" GAMES


| | Our Normal Price | Special Price | | Our Normal Price | Special Price |
|---------------------|------------------|---------------|--------------------------|------------------|---------------|
| Firetrack | 11.70 | (3.00) | XOR Designer | 11.65 | (3.00) |
| Psychastria | 9.30 | (FREE) | S. Fox Strip Poker | 10.10 | (1.00) |
| Sphere of Destiny | 9.30 | (FREE) | Hobbit | 14.00 | (6.00) |
| Thunderstruck 2 | 9.30 | (FREE) | Lord of the Rings | 15.55 | (8.00) |
| Dunjuz | 6.20 | (FREE) | Imogen 40 Track | 7.75 | (FREE) |
| Computer Hits Vol 2 | 11.65 | (3.00) | Imogen 80 Track | 7.75 | (FREE) |
| Starquake | 9.30 | (FREE) | Micropower Magic 2 | 6.20 | (FREE) |
| Blue Ribbon II | 7.75 | (FREE) | Strike Force Harrier | 10.10 | (1.00) |
| Colossus Chess 4 | 11.65 | (3.00) | Island of Xaan | 10.10 | (1.00) |
| Living Daylights | 11.65 | (3.00) | Acornsoft Hits 1 | 9.30 | (FREE) |
| Trivial Pursuit | 15.55 | (8.00) | Acornsoft Hits 2 | 9.30 | (FREE) |
| Phantom | 10.10 | (1.00) | Around the World | | |
| Airwolf | 11.65 | (3.00) | In 40 Screens | 6.20 | (FREE) |
| Commando | 11.65 | (3.00) | Collection Vol 1 | 9.30 | (FREE) |
| Paperboy | 11.65 | (3.00) | Collection Vol 2 | 9.30 | (FREE) |
| Cholo | 14.00 | (6.00) | Palace of Magic | 9.30 | (FREE) |
| Sentinel | 11.65 | (3.00) | Codename Droid | 9.30 | (FREE) |
| Yie ar Kung Fu | 10.10 | (1.00) | Crazee Rider | 9.30 | (FREE) |
| The Kat Trilogy | 9.30 | (FREE) | Deathstalker/Interceptor | 11.65 | (3.00) |
| Apocalypse | 11.65 | (3.00) | Elite | 11.65 | (3.00) |
| Monopoly | 11.65 | (3.00) | Grand Prix Cons. Set | 9.30 | (FREE) |
| Scrabble | 11.65 | (3.00) | Reverskull | 9.30 | (FREE) |
| XOR | 10.10 | (1.00) | Repton II | 9.30 | (FREE) |


BBC DISC 5.25" UTILITIES

| | Our Normal Price | Special Price |
|------------------------------------|------------------|---------------|
| Mini Office II | 13.20 | (5.00) |
| DFM Database + Labels | 23.40 | (18.00) |
| Home Accounts Manager | 13.20 | (5.00) |
| Transact | 23.40 | (18.00) |
| Admin Xtra 40 | 11.65 | (3.00) |
| Admin Xtra 80 | 11.65 | (3.00) |
| Feat St. Editor 40 | 31.15 | (25.00) |
| Feat St. Editor 80 | 31.15 | (25.00) |
| Feat & Graphics (Graphics Library) | 11.65 | (3.00) |
| Wait Disney 40 | | |
| (Graphics Library) | 11.65 | (3.00) |
| Wait Disney 80 | | |
| (Graphics Library) | 11.65 | (3.00) |
| MacSystem 1 & 2 | 19.50 | (13.00) |

If you are not buying blank disks then you can buy any of the programs above by paying 'our normal price', (Much cheaper than retail).

ALL PRICES ARE INCLUSIVE OF POST & VAT

N 

Nebulae, Dept. M.I. FREEPOST, Kilroot Park Industrial Estate, Carrickfergus, Co. Antrim, BT38 7BR
Telephone (09603) 65020 (Monday to Friday 9 to 5)
7 Day delivery. (TEL  **09603) 51020**)
& 14 day money back period

WE accept orders from all government bodies, schools, universities, PLC's etc. We despatch on receipt of an official purchase order.

FREEPOST YOUR ORDER TODAY - NO STAMP REQUIRED

The ADFS/SWR Management System (ASMS)

ASMS provides a user friendly front end to the ADFS and the Sideways Ram commands. Being resident in sideways ram or rom, ASMS is always available from a simple * command.

ASMS is written for the Master series microcomputers and makes full use of the Master's advanced features including sideways, shadow & CMOS ram, the real-time clock and MOS. ASMS uses a MODE 128, 80 column, high resolution screen display throughout and supports screen 'windows' to display information.

ASMS is a very sophisticated ADFS menu program with extensions for sideways ram. ASMS is menu driven and single key entry is all that is required most of the time.

Price £16.00 (rom image) or £20.50 (eprom), prices are all inclusive.

Please make cheques payable to:

Robert Johnson,
Hartington House, Eckington Road,
Staveley, Chesterfield
Derbys.

MICRO MEDIA

Computer Supplies Ltd.

Freepost,
Dept. MU, Rydal Mount, Baker Street
Potters Bar, Herts EN6 3BR (NO STAMP REQUIRED)

0707 52698 (5 lines)

HEAD CLEANERS

| | | |
|----|-------|------|
| | 5.25" | 3.5" |
| 1 | 3.95 | 5.00 |
| 3+ | 3.50 | 4.55 |
| 6+ | 3.15 | 4.10 |


5 1/4 MICRO MEDIA Brand Discs

| | 10 | 30 | 50 | 100 | 250 |
|----------------|-------|-------|-------|--------|--------|
| SS/DD | 6.55 | 18.55 | 29.05 | 53.10 | 118.00 |
| DS/40T | 7.90 | 22.30 | 34.90 | 64.60 | 144.50 |
| DS/80T | 9.40 | 26.50 | 40.20 | 75.15 | 165.90 |
| DS/HD for PCAT | 20.10 | 57.20 | 90.10 | 168.60 | 385.55 |

5 1/4 Reversible discs (Flippy's)

Have two write protect notches & index holes.
Suitable for 40 or 80 track drives.

| | | | | | |
|--|-------|-------|-------|-------|--------|
| | 10.55 | 30.00 | 47.40 | 88.10 | 204.55 |
|--|-------|-------|-------|-------|--------|



All discs supplied are with labels, 5 1/4" write protects, envelopes & hub rings.

Discs purchased direct from one major manufacturer. 100% certified error free - lifetime guarantee.

PRICES INCLUDE V.A.T.



5 1/4 Rainbow Discs come in five colours

| | 25 | 50 | 100 | 250 | 500 |
|--------|-------|-------|-------|--------|--------|
| SS/DD | 16.50 | 30.75 | 57.10 | 134.50 | 252.45 |
| DS/40T | 17.95 | 33.10 | 60.70 | 141.45 | 262.20 |
| DS/80T | 19.00 | 35.20 | 64.85 | 148.75 | 276.00 |

5 1/4 Unbranded Discs

| | 9.80 | 19.35 | 36.40 | 86.55 | 163.85 |
|--------|-------|-------|-------|--------|--------|
| SS/DD | 9.80 | 19.35 | 36.40 | 86.55 | 163.85 |
| DS/40T | 10.95 | 20.65 | 38.20 | 89.70 | 172.50 |
| DS/80T | 13.55 | 25.65 | 47.85 | 113.55 | 216.20 |

3 1/2 Unbranded Discs

| | 10 | 30 | 50 | 100 | 250 |
|-------|-------|-------|-------|--------|--------|
| SS/DD | 15.10 | 42.60 | 65.95 | 117.70 | 264.75 |
| DS/DD | 16.20 | 45.70 | 72.95 | 128.50 | 290.00 |

3 1/2 MICRO MEDIA Brand

| | 17.55 | 50.45 | 80.25 | 147.70 | 347.80 |
|-------|-------|-------|-------|--------|--------|
| SS/DD | 17.55 | 50.45 | 80.25 | 147.70 | 347.80 |
| DS/DD | 18.75 | 53.90 | 85.95 | 159.20 | 376.55 |

AUTUMN CATALOGUE OUT NOW - CALL OR WRITE FOR YOUR COPY

Monitor Swivel Bases



Pan tilt revolves around 360 degrees
12.5 degrees tilt up and down
Adjustable by front mechanism.

| | 55 x 280 x 260mm | 55 x 355 x 320mm |
|------------------|------------------|------------------|
| for 12" Monitors | 1 12.10 | 1 16.70 |
| 3+ | 10.99 | 15.15 |
| 6+ | 10.35 | 14.30 |

Adjustable Copy Holder


A4 adjustable desk clamping. Magnifying cursor line. Paper thickness adjustment. Paper height adjustable clip.

| | |
|-------------------------|-------|
| A4 Version | 25.35 |
| Desk Top Version | 13.69 |
| A3 Version | 40.65 |

Printer Stand

5mm perspex

| | | |
|---------------------------|-------------------|-------|
| 80 Column Version | 400 x 310 x 100mm | 21.65 |
| 132 Column Version | 600 x 310 x 100mm | 29.30 |



Mobile Printer Stand

Rugged steel frame. Height adjustable basket for output paper & base shelf for input paper. Self assembly - includes castors.

| | |
|------------|--------|
| 80 column | £52.90 |
| 132 column | £65.40 |

The Space Saver



Paper feed and refeed positioned one above the other. Dial controlled paper feed with adjustable deflectors ensures smooth flow and automatic refolding.

| | 80 column | 132 column |
|----|---------------|---------------|
| | 414x380x460mm | 530x380x460mm |
| 1 | 34.85 | 42.50 |
| 3+ | 32.75 | 40.00 |
| 6+ | 31.05 | 38.30 |

Printer Ribbons

Prices (£) per each ribbon

| | 3 | 6 | 12 |
|----------------------------|------|------|------|
| Amstrad 8512/8256 | 5.65 | 5.35 | 4.90 |
| R, G, BR, BL, Y | 7.50 | 7.10 | 6.55 |
| DMP 2000/3000 | 2.80 | 2.60 | 2.35 |
| Brother HR15 MS | 3.30 | 3.10 | 2.80 |
| R, BR, BL | 4.35 | 4.10 | 3.75 |
| Centronics GLP | 3.65 | 3.45 | 3.15 |
| R, G, BR, BL, Y | 4.65 | 4.40 | 4.00 |
| Canon 1080/1156 | 3.30 | 3.10 | 2.80 |
| R, G, BR, BL, Y | 4.95 | 4.65 | 4.25 |
| Citizen 120 D | 4.70 | 4.35 | 4.15 |
| Diablo HyType II MS | 2.80 | 2.65 | 2.40 |
| R, BR, BL | 3.80 | 3.55 | 3.25 |
| Epson | | | |
| FX/MX/RX 80 FX 800 | 3.55 | 3.35 | 3.10 |
| R, BR, BL, G, Y | 4.95 | 4.65 | 4.25 |
| MX 100/FX 1000/FX 105 | 4.65 | 4.35 | 4.20 |
| R, BR, BL | 5.85 | 5.55 | 5.10 |
| LX 80/86 GX 80 | 2.80 | 2.65 | 2.40 |
| R, G, BR, BL, Y | 4.70 | 4.45 | 4.05 |
| Juki 6100 MS | 3.30 | 3.10 | 2.80 |
| 6100 SS | 2.05 | 1.90 | 1.75 |
| R, BR, BL | 2.75 | 2.60 | 2.35 |
| Kaga KP810/910 | 3.30 | 3.10 | 2.80 |
| R, G, BR, BL, Y | 4.95 | 4.65 | 4.25 |
| M/Tally MT80 MS | 4.10 | 3.85 | 3.55 |
| Panasonic KXP110 | 5.50 | 5.20 | 4.75 |
| R, G, BR, BL, Y | 7.20 | 6.80 | 6.25 |
| Sumo IV MS | 3.30 | 3.10 | 2.80 |
| Fabric | 3.30 | 3.10 | 2.80 |
| Star NL 10 | 5.50 | 5.20 | 4.75 |
| Shinwa CP80 MS | 4.10 | 3.85 | 3.55 |

One off if ordered with other product
Please mix colours and types for best prices
R = Red, BR = Brown, BL = Blue, G = Green,
Y = Yellow

If the ribbon you require is not listed please let us quote

The above is a small selection of the 250 different ribbons we stock. We shall be pleased to find your ribbon, however old or obscure.

MD 120

| | | |
|----|------------|--------------|
| 1 | 12.55 | 5 1/4" x 120 |
| 3+ | 11.90 each | |
| 6+ | 11.35 each | |



MD 50


| | | |
|----|-----------|-------------|
| 1 | 7.80 | 5 1/4" x 50 |
| 3+ | 7.40 each | |
| 6+ | 7.10 each | |



Wire Printer Stand

stacks print-out in document tray automatically. Suitable for most standard printers. Made of safety coated steel wire.

| | |
|----------------|--------|
| For 80 column | £14.50 |
| For 132 column | £16.50 |

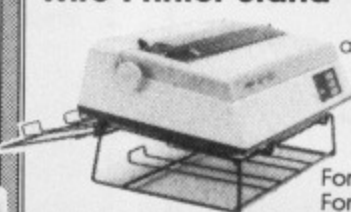

MD 100

| | | |
|----|------------|--------------|
| 1 | 10.80 | 5 1/4" x 100 |
| 3+ | 10.30 each | |
| 6+ | 9.80 each | |



MM 40

| | | |
|----|-----------|-------------|
| 1 | 8.30 | 3 1/2" x 40 |
| 3+ | 7.90 each | |
| 6+ | 7.50 each | |



MM 80

| | | |
|----|------------|-------------|
| 1 | 10.95 | 3 1/2" x 80 |
| 3+ | 10.40 each | |
| 6+ | 9.90 each | |



Computer Labels

Continuous fanfold, sprocket fed
Price per 1,000 3,000

| | | |
|----------|------|-------|
| 70 x 36 | 3.85 | 11.55 |
| 89 x 36 | 5.65 | 14.25 |
| 89 x 49 | 7.95 | 20.40 |
| 102 x 36 | 6.35 | 15.30 |

Please state no. of labels across the sheet (1, 2 or 3)

Computer paper

Plain fanfold, micro perf edges

| Size | Weight 1000s gm per box | 1 box | 3 box + |
|----------------|-------------------------|-------|---------|
| 11x9 1/2 | 60 2 | 16.90 | 43.80 |
| | 80 2 | 20.90 | 53.55 |
| Exact A4 | | | |
| 11 3/4 x 9 1/4 | 70 2 | 22.50 | 58.50 |
| | 90 1 | 16.90 | 45.15 |

ALL PRICES INCLUSIVE OF POSTAGE & PACKING AND V.A.T.

MICRO MEDIA

Computer Supplies

Freepost, Dept. MU, Rydal Mount, Baker Street, Potters Bar, Herts. EN6 3BR



Access & Visa



Out of Office Hours (Answer machine)

0707 52698 (5 lines)

Orders despatched 24 hrs.

Please allow 5 days for delivery.
For next day delivery, please ring for details. Postage covers U.K. only.

A Catalogue is available with a more comprehensive range of products including - 3M & Verbatim discs - a wider choice of paper labels, ribbons and accessories.

Ring or write to obtain your copy now!

Educational and HMG orders accepted. For official orders/invoice/credit orders there is a minimum order value of £15.00 excluding V.A.T. Any order under £15.00 will be subject to £3.00 handling charge.

Personal callers welcome
Weekdays 8.30am - 5.30pm
Saturdays 9.30am - 1.00pm

BEEBUG

TECHNICAL ASSISTANT

BEEBUG has vacancies in St. Albans for young computer enthusiasts, who are familiar with the BBC Micro or Master. You will join a team providing technical advice on a wide range of software and hardware products for the BBC, Master and Archimedes.

Send details of yourself and your computer experience to:
The Personnel Manager, Beebug Ltd, Dolphin Place,
Holywell Hill, St Albans, Herts. AL1 1EX.

COMPUTECK Some Points of Interest

A business has to make a profit to survive and you, the customer provide that profit to keep that business trading. Out of that profit comes lots of costs and usually a large one is advertising. We at Computeck keep our advertisements small and running costs to a minimum, then we can pass these savings on to you by way of discounts, as much as 20% on some items. At present we have 800 plus items on our lists of new and used hardware and software. We trade in software and hardware for new items. So send a SAE today for our up to the minute prices from an Archimedes to a Ram chip we have it all - Minerva Systems, Pace, Computer Concepts, AMS, Beebug, ACP, Taxan, Vine Micros, etc. etc. We are also registered Acorn Dealers. So if the above makes sense to you, buy from us and we will be able to pass on bigger and bigger savings to you

Due to large stocks - 10 tape based games £12.95 + £1.50 PP

Telephone 04574 65953 ACCESS and VISA accepted

Computeck (Dept MU)

2 Werneth Road, Glossop, Derbyshire SK13 9LZ

WARNING:

Anyone sending 'pirated' software on any media will be reported to the Software House or Author for legal action by them!


Sciways for Scientists

- * Over 350 defined characters accessible with simple 2-key codes
- * All characters printable on both screen and printer
- * User defined characters can be stored on disc
- * All facilities can be used with word processors or with BASIC
- * Tested with BASIC I & II, Wordwise, Wordwise Plus, View 2.1, View 3.0, on the Master 128, B+ & Model B, and with Epson/compatible printers

GREEK ALPHABET: Upper and Lower case, upright and italic

Α Β Γ Δ Ε Ζ Η Θ Ι Κ Λ Μ Ν Ξ Ο Π Ρ Σ Τ Τ Φ Χ Ψ Ω

SCIENTIFIC CHARACTERS: Mainly mathematical but also chemical symbols



Orders accepted from schools, colleges, establishments, etc.
Private orders - cheque with order, please

PRICE £38.52 inc VAT, p&p
16k ROM, 40/80 disc & manual
(not compatible with Inter-Word,
or external shadow RAM boards)

Mayhew Telonics,
376a Ringwood Road,
Poole, Dorset BH12 3LT
Tel: (0202) 747695

**QUESTION: What searches 150 magazines in under 300 seconds?
ANSWER: The Magazine Bibliography Database**

It contains details of nearly 21,000 references and includes every issue of ACORN USER, MICRO USER, A & B COMPUTING, EDUCATIONAL COMPUTING and BEEBUG e.g. articles, listings, reviews, hints, tips, corrections, news items and readers' letters - everything remotely related to the BBC Micro!

Choose any subject or keyword; the fast two-string search option (0.39 seconds per 10K) provides the title, description, source, page number and date of all occasions when it has been written about, on screen with global or selective hard copy.

Magazine reviewers have called it "the ultimate index", "a valuable asset that has tremendous possibilities", "outstanding", "unique" and a "remarkable product". Compatible with all models. Send large SAE for full details. Please specify number of tracks, sides and drives when ordering. Cheques or official educational orders accepted.

| | | | |
|----------------------------|---------------------|--------|-----|
| MAGAZINE BIBLIOGRAPHY 1-16 | (Dec '81-April '87) | 1,415K | £60 |
| ACORN USER 1-4 | (July '82-Dec '86) | 349K | £20 |
| MICRO USER 1-4 | (March '83-Aug '87) | 350K | £20 |
| A & B COMPUTING 1-3 | (May '83-May '87) | 282K | £15 |

Parts available individually: £5

McHUGH ENTERPRISES
43 Hookstone Oval, Harrogate, HG2 8QE

ADVERTISERS' INDEX

| | | | |
|--------------------------------------|-----------|---------------------------------|--------------|
| 4mation Educational Resources | 80 | Malvern Software | 152 |
| 21st Software | 40 | Manor Court Supplies | 25 |
| Advanced Memory Systems | 3 | Maths Workshop | 25 |
| Amcom Software | 80 | Mayhew Telonics | 154 |
| B&S Computing | 12 | McHugh Enterprises | 154 |
| Beebug | 20,21,154 | Meadow Computers | 136 |
| C&F Associates | 12 | Micro Aid | 152 |
| Camelot Computer Services | 135 | Microboss | 151 |
| Cantocks Enterprises | 151 | Microdis | 60 |
| Cardigan Electronics | 14 | Micro Help | 87 |
| Care Electronics | 112 | MicroLink | 71 |
| Centec Electronic Systems | 142 | Microman Computers | 56 |
| CJE Micros | 8 | Micromedia | 153 |
| Clares | 38 | Micronet | 85 |
| CLP | 142 | Microsol | 115 |
| Computeck | 154 | Minerva | 111 |
| Computaccount | 22 | Minic Business Services | 151 |
| Computer Concepts | 30,81 | Morley Electronics | 28,29 |
| Computer Express | 62 | Nebulae | 152 |
| Computer Repairs | 139 | Norwich Computer Services | 14 |
| Contex Computing | 135 | Opus Supplies | 45 |
| C.P. Microsystems | 136 | P&H Electronics | 75 |
| Dabs Press | 126 | Paul Fray | 152 |
| Database Software | 50,51 | Peartree Computers | 128-130 |
| Data Store | 87 | Pineapple Software | 76 |
| Delta Computers | 142 | Risc User | 11 |
| Design Consultancy | 70 | Robert Johnson | 152 |
| Design Dynamics | 24 | Selec Software | 126 |
| Design People Software | 88 | Slippery Slug | 14 |
| DGA Software | 125 | Software Bargains | 13 |
| Direct Disk Supplies | 132 | Solidisk Technology | 26,27 |
| Dram Electronics | 136 | S.P. Electronics | 151 |
| Electromusic Research | 136 | Summit Software | 111 |
| Electron & BBC Micro User Show | 6 | Superior Software | 2,72,155,156 |
| Format Services | 152 | System Software | 87 |
| Fosse Systems | 125 | Taxan | 48,49 |
| HSV Computer Services | 108 | Technomatic | 116-122 |
| Impact Posters | 35 | Towerhill Computers | 112 |
| Intelligent Interfaces | 125 | Twillstar Computers | 66,67 |
| Ixchel Software | 151 | Viglen | 54 |
| J&J Microchips | 125 | Vine Micros | 134 |
| Kosmos Software | 126 | Voltmace | 82 |
| Lightspeed Software | 115 | Watford Electronics | 92-103 |
| Linear Graphics | 46 | Weserve | 139 |
| Magnolia Soft | 154 | Willow Software | 142 |
| | | W.J.D. Vanstone | 151 |
| | | W.L. Computer Services | 151 |

FARMER GILES

A FARMING SIMULATION WITH A REAL DIFFERENCE

- * Enter into the spirit of dairy, arable or mixed farming
- * Simple to use - two levels of difficulty
- * Tried and researched in the classroom with children aged 9/12
- * Many colourful screens and seasonal tunes
- * Can be used individually or with small groups
- * True interplay between groups influencing supply and demand of silage or livestock. Groups can also hire farm machinery from each other
- * Alter 19 key factors, including prices and time limit, to suit own taste
- * All data quickly saved - no need to start all over again
- * Printout of each group's current position including state of acres
- * Printout of both planning and record sheets
- * Scope for endless adventures to challenge own imagination and logic

For BBC B/Master Disk £10.95 manual included

Cheque/PO to Magnolia Soft, 24 Elliott Close, Exeter EX4 5ED
(Write for further details)

52
25
25
54
54
86
52
51
60
87
71
66
53
35
5
1
1
9
2
4
5
5
2
0
6
1
2
6
4
3
7
6
7
9
2
2
7
4
2
8
9
2

PRIZE COMPETITION
Can you become the Zarch world Champion?
The player who achieves the highest game score will be awarded an impressive trophy and the original artwork for Zarch, framed and autographed. There are also 50 Zarch T-shirts for runners-up.
Closing Date: 31st July, 1988.

ZARCH



Leaving the Home Base — the Mission commences



A landed Seeder spreads the debilitating red virus



A raging battle against several alien spaceships




Flying fast and low over a hilly coastline

Zarch — a revolution in software

David Braben is the co-author of the unanimously acclaimed game, Elite — probably the world's highest-selling computer game. After months of program development work, David has now harnessed the speed and performance of the Archimedes computer to create another programming masterpiece... Zarch.

Zarch is unlike any game you have ever seen before. Even the demonstration program, Lander, supplied on the Archimedes Welcome disc, can only give the most basic idea of the features and fascination that Zarch has in store.

For the  Archimedes computer: **£19.95** (on 3 1/2" disc)



Dept. ZR1, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453

Please make all cheques payable to "Superior Software Ltd".



24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately. (This does not affect your statutory rights)

"Play It Again, Sam"

FEATURING:
Four Number 1 Hits



THE BEST COMPILATION EVER for the BBC Micro and Acorn Electron

Sam, an ardent fan of Superior Software's games, is always ready for a challenge... and the tougher the better! Here's four games that, as time goes by, he returns to again and again.

Citadel, a fascinating arcade-adventure, features over 100 beautifully detailed screens of action. Computer Gamer reported: "The game is extremely good. Well worth the cash."

Thrust is simple and fun-to-play, yet incredibly realistic and highly addictive.

"This game has class... try it!" urged Computer & Video Games.

Stryker's Run is a challenging action-packed combat game.

"This game will impress you... the graphics are stunning... this should be in every collection," A & B Computing remarked.

Ravenskull is a massive arcade-adventure game, full of puzzles and problems to be solved.

Acorn User commented: "Ravenskull is a very good game and is destined to become another Superior classic."

| | | | |
|-----------------------------------|--------|------------------------------------|--------|
| BBC Micro Dual Cassette | £9.95 | Acorn Electron Dual Cassette | £9.95 |
| BBC Micro 5¼" Disc | £11.95 | Acorn Electron 5¼" Disc | £11.95 |
| BBC Master Compact 3½" Disc | £14.95 | Acorn Electron 3½" Disc | £14.95 |

(Compatible with the BBC B, B+ and Master Series computers).

**SUPERIOR
SOFTWARE**
Limited

ACORNSOFT

Dept. PS3, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453

Please make
all cheques
payable to
"Superior
Software Ltd".



24 HOUR TELEPHONE
ANSWERING SERVICE FOR
ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
 - Postage and packing is free.
 - Faulty cassettes and discs will be replaced immediately.
- (This does not affect your statutory rights)

gain, Sam''



FEATURING
Four Number 1

THE MICRO USER

A Database Publication

THE MICRO USER

BODY BUILDING
Interfacing with digital displays

COMMS
Exploring Britain's top bulletin board

HAC MAN
Cholo: full solution to Firebird's classic

GAME
Jump aboard the deadly Dune Flier

UTILITIES
Super pixel editor
Multi-column lister

CEEFAX
Complete guide to free telesoftware

REVIEWS
• C compilers
• SPX colour board
• Romboard 4
... plus all the latest software

COMPILATION EVER Micro and Acorn Electron

s games, is
ougher the
oes by, he

Thrust is simple and fun-to-play, yet incredibly realistic and highly addictive.

"This game has class...try it!" urged Computer & Video Games.

Stryker's Run is a challenging action-packed combat game.

"This game will impress you...the graphics are stunning...this should be in every collection," A & B Computing remarked.

Ravenskull is a massive arcade-adventure game, full of puzzles and problems to be solved.

Acorn User commented: "Ravenskull is a very good game and is destined to become another Superior classic."

al Cassette.....£9.95
Disc.....£11.95
Disc.....£14.95

s computers).

SOFT

0532 459453

Please make all cheques payable to "Superior Software Ltd".



24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately. (This does not affect your statutory rights).

November 1987

Vol. 5 No. 9