

A Database Publication

THE MICRO USER

Volume 6
Number 3
May 1988
£1.25

Top-selling guide
to the BBC Micro, Master,
Archimedes and Z88

BODY BUILDING

An easy-to-build
rainfall gauge

COMMS

The new MicroLink
modem evaluated

PROLOG

Teach logic to
your BBC Micro

GAME

Meet the challenge
in Chinese Chess

UTILITIES

- Directory kill
- Wordwise clock

Z88



- Enhanced display
- The Withered Toad

REVIEWS

- Star printer
- System DeltaPlus
- Promptwriter
- ... plus all the
latest software

STAR GAZING

on the
BBC Micro

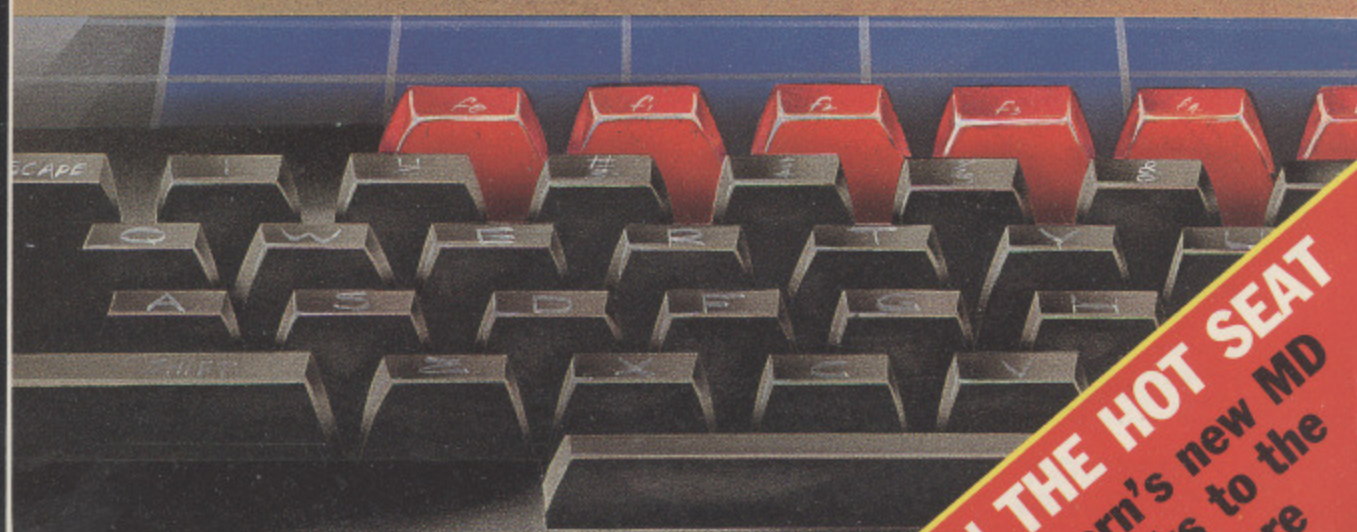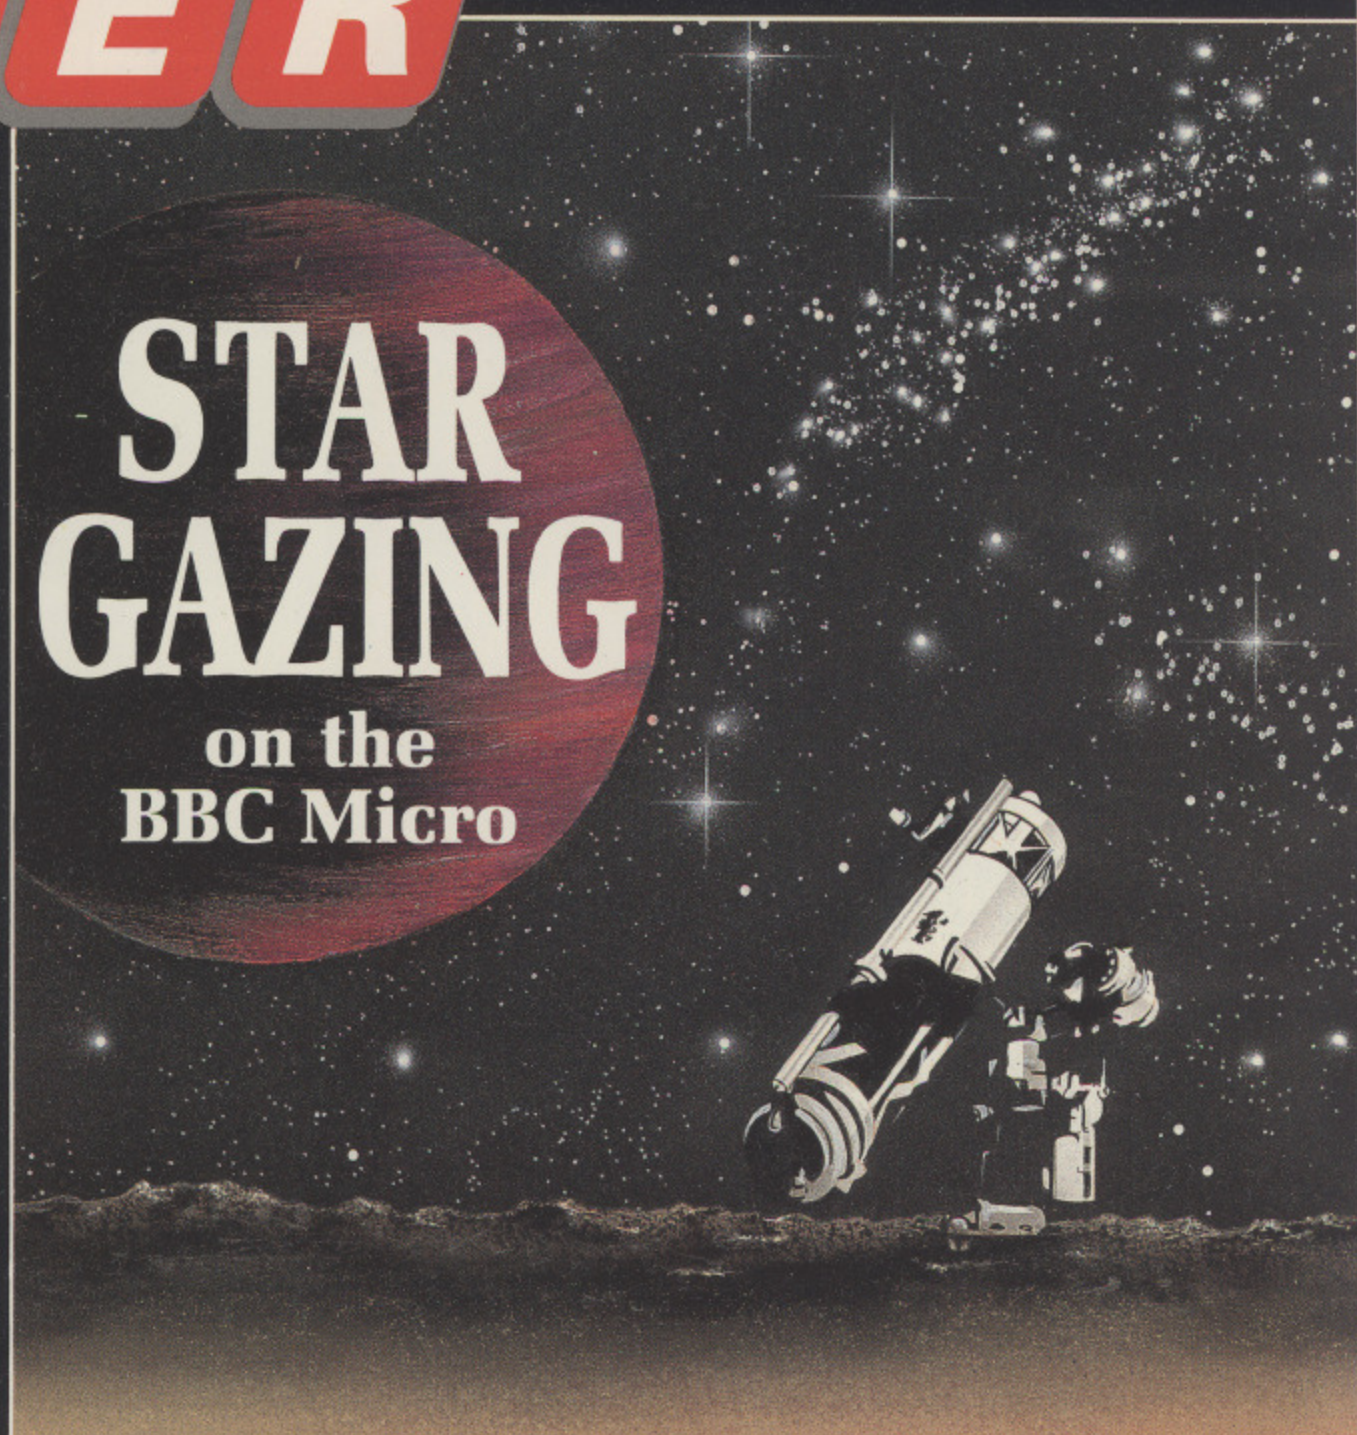

IN THE HOT SEAT
Acorn's new MD
looks to the
future

Featuring
4 Chartbusters

Play It Again Sam 2



SUPERIOR'S BEST COMPILATION YET

for the BBC Micro and Acorn Electron

Sam, an ardent fan of Superior Software's games, has been absolutely delighted by the success of his first selection of chart-topping Superior Software games. Now here's four more games that will keep you enthralled day after day — on that you can rely!

Repton 3 is probably the best-loved of all of Superior's games. Our endearing lizard, Repton, is trapped in a netherworld amidst falling rocks, fearsome monsters and haunting spirits. A superb strategic game which includes character and screen designers enabling you to create your own scenarios. A & B Computing reported: "This is top quality; arcade action at its very best!"

Crazee Rider, a fascinating motorcycle-racing game, features seven international racetracks. "It's fast, challenging and there's plenty to keep you entertained. Thoroughly recommended" remarked The Micro User.

Galaforce is the thinking-man's alien-zapping game; fast and furious, yet full of strategy. Oracle enthused: "You haven't lived until you've played this game. Buy it! — it's the ultimate in shoot-em-up. RATING: 20 (out of 20)!"

Codename: Droid is a challenging arcade-adventure. The quality of the graphics and animation must be seen to be appreciated. Electron User summed the game up by saying "CODENAME: DROID is brilliant . . . it's worth every penny!"

BBC Micro Dual Cassette.....**£9.95** Acorn Electron Dual Cassette.....**£9.95**
 BBC Micro 5¼" Disc.....**£11.95** BBC Master Compact 3½" Disc.**£14.95**

(Compatible with the BBC B, B+ and Master Series computers).

THE ORIGINAL

"Play It Again, Sam"

Our original selection of 4 of Superior's biggest hits for the BBC Micro and Acorn Electron is still available.

- CITADEL
- STRYKER'S RUN
- THRUST
- RAVENSKULL

SUPERIOR SOFTWARE
Limited

ACORNSOFT

Dept. 2PS10, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453.

Please make all cheques payable to "Superior Software Ltd".




24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

(This does not affect your statutory rights)

MORE POWER TO YOUR ELBOW

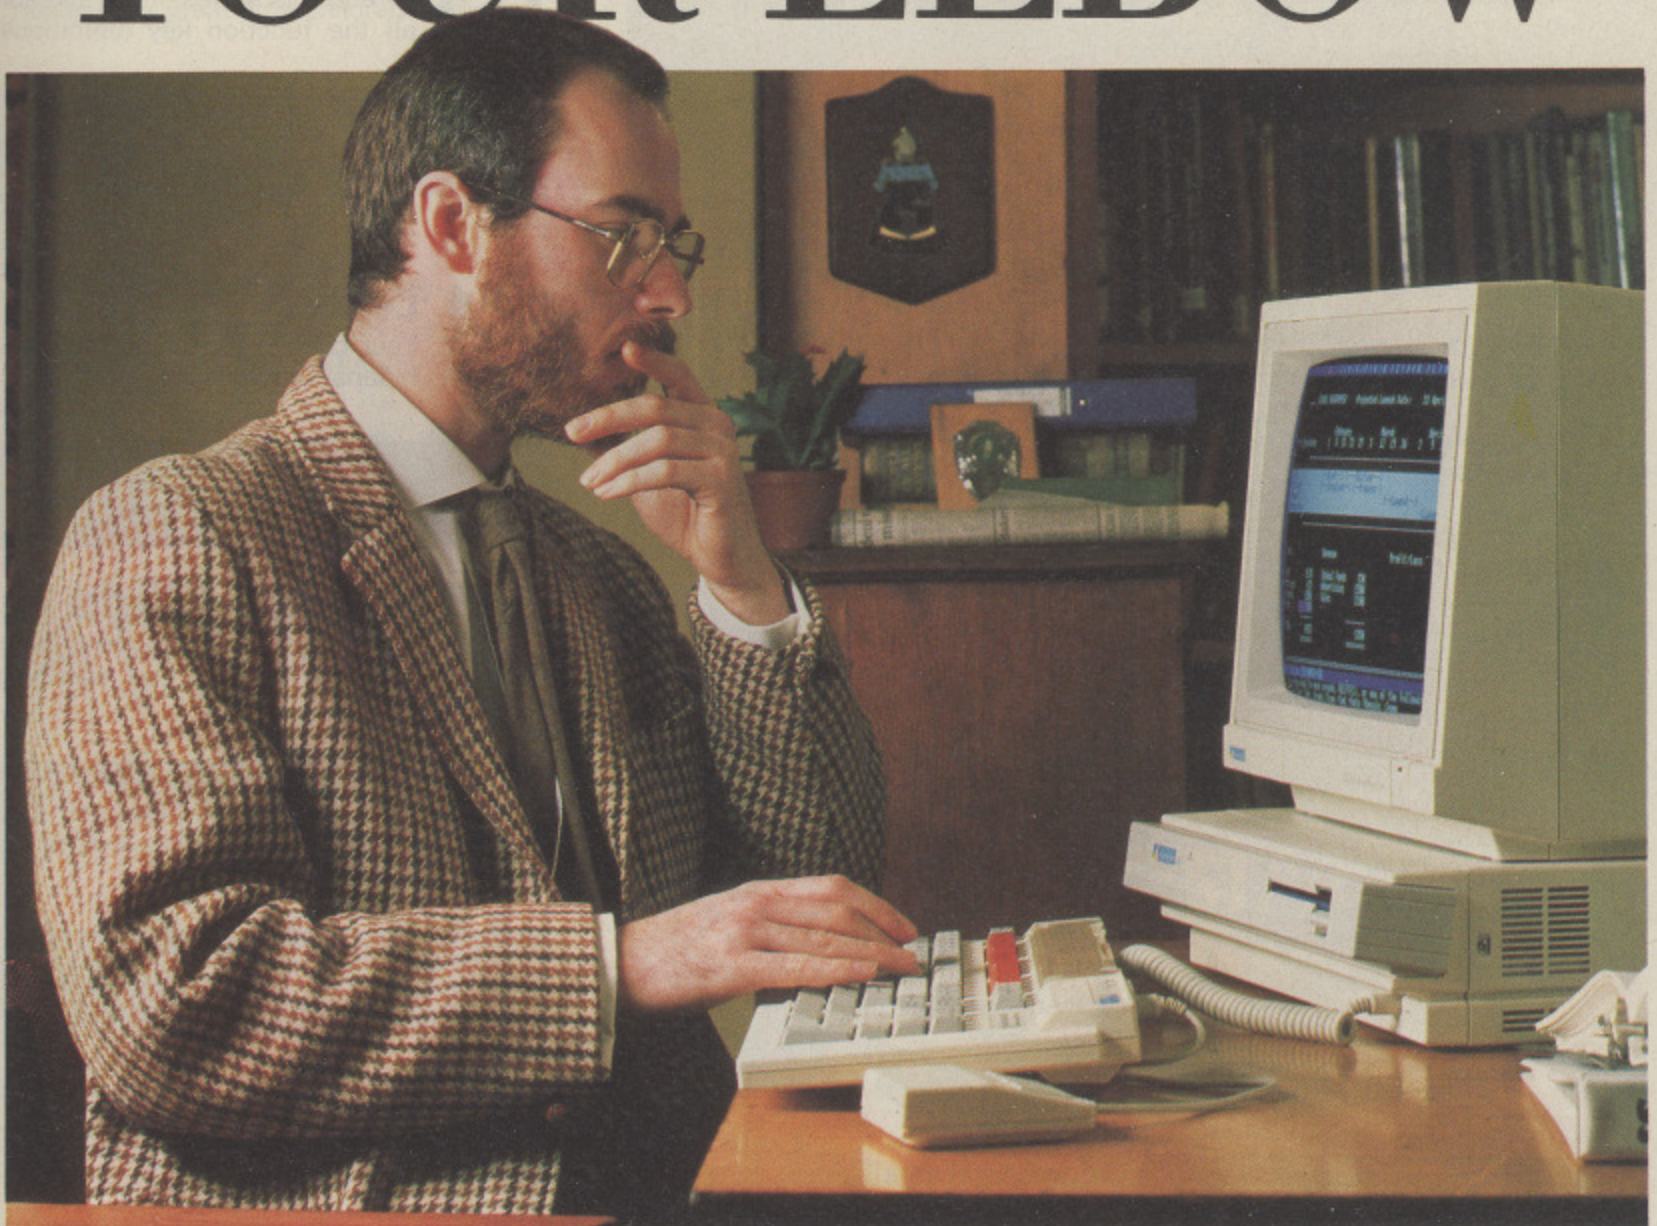

In handling word processing, spreadsheets and project planning, the speed of Acorn's Archimedes microcomputer is hugely impressive.

The benefits of such power include superb graphics for CAD and image processing, and considerable creative opportunities in the field of sound and music.

Furthermore, with the option of a PC emulator Archimedes opens up the world of MS-DOS and a wide choice of business software applications.

Send for the Archimedes Power Pack. No other computer offers such power and performance for the price.

Tel: 0800 100 100 (Free call)

To: Acorn Computers Limited FREEPOST 4335, BS1 3YX.
Please send me the Archimedes Power Pack.

I am particularly interested in the following areas:

- | | | | |
|--|--|--|------------------------------------|
| <input type="checkbox"/> Word processing | <input type="checkbox"/> Spreadsheets | <input type="checkbox"/> Database management | <input type="checkbox"/> Education |
| <input type="checkbox"/> Graphics applications | <input type="checkbox"/> Information retrieval | <input type="checkbox"/> Project Planning | <input type="checkbox"/> Home |
| | | | <input type="checkbox"/> Business |

Name: _____

Position: _____

Company: _____

Address: _____

Postcode: _____

Tel. No: _____

Offer applies to the U.K. only.

Acorn
The choice of experience.

Archimedes

A BRITISH BROADCASTING CORPORATION MICROCOMPUTER

MS-DOS is a trademark of the Microsoft Corporation. Acorn and Archimedes are trademarks of Acorn Computers Limited.

THE MICRO USER

Managing Editor
Derek Meakin

Group Editor
Alan McLachlan

Features Editor
Peter Davidson

Production Editor
Peter Glover

Assistant Features Editor
Steve Turnbull

News Editor
Mike Cowley

Technical Editor
Mike Cook

Promotions Editor
Christopher Payne

Reviews Coordinator
Pam Turnbull

Advertisement Manager
John Snowden

Advertising Sales
Peter Babbage, Gail Blincow

Tel: 0625 878888 (All depts.)
0625 879940 (Subs.)
Telecom Gold: 72:MAG001
Telex: 265871 MONREF G
Quoting Ref. MAG001
Prestel Mailbox: 614568383
Fax: 0625 879966

Published by:
Database Publications Ltd,
Europa House, Adlington Park,
Adlington, Macclesfield SK10 4NP.

Subscription rates for
12 issues, post free:

£15 - UK
£25 - Europe (incl. Eire)
£31 - Overseas Surface
£42 - Overseas Air

ABC 59,727
Jan-June 1988
ISSN 0265-4040

The Micro User welcomes program listings and articles for publication. Material should be typed or computer-printed, and preferably double-spaced. Program listings should be accompanied by cassette tape or disc. Please enclose a pre-paid, self-addressed envelope, otherwise the return of material cannot be guaranteed. Contributions accepted for publication will be on an all-rights basis.

© 1988 Database Publications Ltd. No material may be reproduced in whole or in part without written permission. While every care is taken, the publishers cannot be held legally responsible for any errors in articles, listings or advertisements.

The Micro User is an independent publication and neither the BBC nor Acorn Computers Ltd are responsible for any of the articles in this issue or for any of the opinions expressed.

News trade distribution: Diamond Europress Sales & Distribution, Unit 1, Burgess Road, Ivyhouse Lane, Hastings, East Sussex TN35 4NR. Tel: 0424 430422.

FEATURES

7 News
All the latest events in the ever-changing world of your BBC Micro.

39 The Challenge
The solution to the problem that we set to test your skill at Basic.

40 Inside Adventures
Geoff Larsen reveals the ideas lying behind his excellent quests.

42 Mad Hatter
A monthly look at adventure games old, new and revamped.

47 Problem Solved
More solutions to some of those mind-testing hardware problems.

55 Archimedes Q & A
All your questions are answered about the top Acorn micro series.

57 MicroLink News
A new look at the giant database written by the users themselves.

72 Library
More high-quality routines which you can use in your own programs.

77 Man at the Top
Exclusive, in-depth interview with Acorn's new managing director.

86 Prolog
Discover how to use this unique artificial intelligence language.

99 Ceefax Guide
What's coming this month on the telesoftware pages of BBC TV.

114 Body Building
Measure the most prominent feature of Britain's climate - rain.

116 Leaky Listing
Test your skill at debugging in another of our occasional series.

119 Extra Commands
To end this series - list and edit all the function key definitions.

141 Hac Man
A wealth of useful hints and tips from our resident games expert.

151 Letters
Your chance to get news, views, moans and your name into print.


UTILITIES

37 The Sky at Night
How to scan the heavens from the comfort of your own armchair.

58 Disc System Transfer
Back up your DFS disc on to ADFS with the aid of this clever utility.

91 Good Timing
We help you keep appointments with a handy on-screen clock.

133 ADFS Disc Tidy
An easy and quick method of directory deletion on the ADFS.

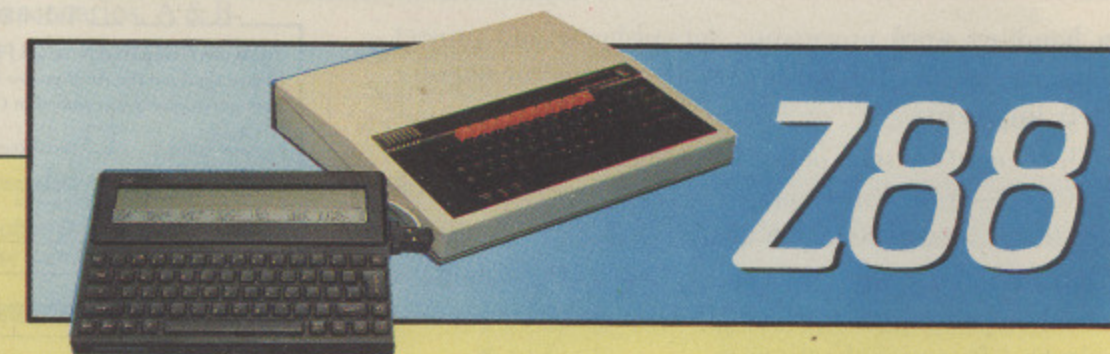

81 Hardware FX
How to use the windows and text effects on your portable micro.

83 Toad in the Hole
We look at the first commercial adventure program for the Z88.

EDUCATION

63 Update
Up to the minute news of the BBC Micro in the world of education.

64 Education Reviews
Three pages of the best schools software analysed by experts.

69 Numbers Game
Make learning to count fun with this great little children's program.

REVIEWS

31 Software Scene
Our experts cast their eyes over the latest and greatest releases.


50 Archimedes Software
Painting in 256 colours and the first mega-database are assessed.

96 Communications
We take a close look at the new MicroLink multi-speed modem.

136 Star Printer
Selectable typefaces at a low price – is it too good to be true?

GAME

95 Chinese Chess
Tax your skills to the limit with this neat, colourful game of strategy.

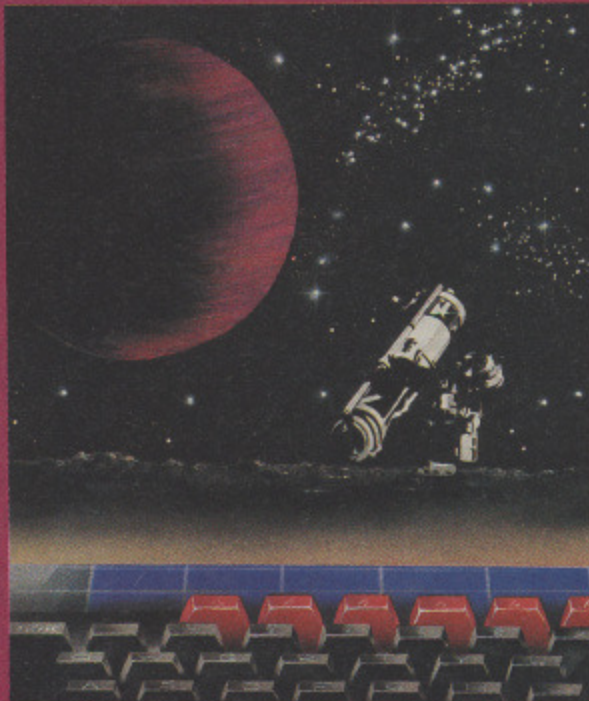

Now go star-gazing on your BBC Micro with the help of our type-in listing of

NIGHT SKY

Each of the 32 major constellations can be displayed – right from Andromeda through to Virgo. Read how to do it on Page 37.

Join our search for the most innovative use of a BBC Micro or Archimedes and you could share

OVER £1,700

worth of prizes that go to winners of The Micro User Innovation Awards for 1988. Full details are on Page 84



One of the most exciting games ever created for 8 bit micros is

STARQUAKE

Turn to Page 158 for an exclusive opportunity to get this mega game for yourself – absolutely free!

MICRO USER CLASSIFIEDS

The best bargains in the world of the BBC Micro come from fellow users of *The Micro User*. Turn to **Pages 130 to 131** to find just what you're looking for – from cheap modems to complete computer systems.



All major listings in this issue are accompanied by a checksum to help overcome any typing mistakes. For full details of how they work, see the article on Page 28 of the February issue of *The Micro User*.

NEXT MONTH

- GAME**
Blast the Beastroids
- UTILITY**
Easy Basic Overlays
- PEEPSHOW**
Save screens instantly
- REVIEW**
Predicta Type



June 1988
issue
on sale
May 4

BEEBUG

For users of the BBC Micro,
Master and Compact

RISC USER

For Archimedes
users

Subscribe to BEEBUG or RISC User and not only will you receive an informative magazine mailed directly to your own address for 1 year,

But you will also benefit from:

- Unlimited access to our technical support team to assist with any computing problems that you may have, and to provide impartial advice.
- A swift mail order service for all your hardware and software needs at competitive prices, and with 5% members' discount.
- A showroom with knowledgeable staff on hand, where you can try out the latest hardware, peripherals and software.
- Free members' adverts in BEEBUG to sell your unwanted kit.
- A trade-in service to upgrade your BBC/Master to a new Master/Archimedes.
- 25% members' discount on the entire Beebugsoft range of software.
- An Acorn appointed specialist support and service centre.

BEEBUG

The magazine is now in its sixth year of publication with 20,000 subscribers throughout the world. Its proven format has been invaluable to serious BBC Micro and Master computer users in the home, education and business.

Each issue of BEEBUG provides 72 pages of articles, programs (utilities, applications etc), tutorials, workshops, reviews, hints & tips, news and information for beginners and experts alike. All our programs are tested on all versions of the BBC Micro, and are also available monthly on disc or tape.

RISC USER

This is the magazine for everyone interested in Acorn's RISC computer, the Archimedes. Launched at the same time as Archimedes, RISC User provides lively and informed coverage of what's happening in the world of Archimedes.

Reviews, hints, programs and articles are all specifically written for Archimedes, showing how to exploit the many features of this sophisticated computer. RISC User is all about the Archimedes; it does not contain modified programs originally intended for the Model B or Master.

BEEBUG and RISC User are both published 10 times a year and are only available on subscription, not through the shops.

	Subscription rates for either magazine	Special rates for both magazines
1 Year UK, BFPO & Channel Islands	£14.50	£23.00
Europe & Eire	£20.00	£33.00
Middle East	£25.00	£40.00
America & Africa	£27.00	£44.00
Elsewhere	£29.00	£48.00


I would like to subscribe to BEEBUG/RISC User/Both Magazines

and enclose a cheque for £ _____
Official Orders Welcome

Please debit my Access/Visa/Connect account with £ _____

Card Number

Expiry



Name _____

Address _____

Access/Visa/Connect card holders may alternatively call our 24 hour hotline on 0727 40303.
All cheques must be in pounds sterling drawn on a UK bank.

Post To:
BEEBUG, Dolphin Place, Holywell Hill, St. Albans,
Herts. AL1 1EX

For a Free BEEBUG Information Pack Phone 0727 40303
MU 5

NEWS *beat*

Dram problems to force price rise?

JAPANESE restrictions on memory chip production – prompted by trade disputes with the States – could have a knock-on effect for Acorn.

Price rises have already been implemented by Atari and Amstrad – and Acorn could well be forced to follow suit, at least for the Archimedes.

The problem centres around drums – dynamic random access memories – which are at the core of the more powerful computers.

"With machines like the Master 128, the amount of ram

used forms a relatively small proportion of the overall manufacturing cost", said Acorn's Michael Page.

"But on an Archimedes 440, with four megabytes of memory, the relative cost is considerably higher.

"We expect the Archimedes to hold its price until mid April – after that we will seriously have to review the pricing policy".

The situation could be eased as and when UK manufacturers get chips into production, but in the short term price increases seem inevitable.



The pop prize

THE first winners from Every Second Counts, the new BBC family quiz shows hosted by Paul Daniels, collect an Archimedes. Marie and Lynas Lacey from Belfast answered questions on pop music against the clock. With them is Mr Ian Goodall, Acorn's sales manager for the UK (North) and Eire.

Easy route to WP

A PACKAGE designed specifically as a user-friendly introduction to word processing has been released by National Extension College (0223 316644).

WASP (Word and Symbol Processor) uses clear, concise menus and displays editing commands on screen, and all

commands are initiated by single keystrokes.

But despite being simple to use WASP still offers powerful features.

It supports an 80 column display, sub and superscripting, full justification, boldening and underlining.

Unusually, the package can also handle mathematical material and foreign languages. And, with a suitable printer, fonts and characters constructed with WASP's pixel

builder can be output. WASP can be used with any BBC Micro with DFS, ADFS or Econet. Price £19.95.

Leave it to your agent

FOR budding BBC Micro programmers intent on making their first million, actually getting a marketing company to

take up their products can be pretty daunting.

Now, thanks to Marjacq Micro (01-724 0565) – an agency for programmers run by Jacqui Lyons – all the hassle involved in finding markets and negotiating contracts is being made a lot easier.

Jacqui has been in business as an agent for some years. At first she dealt with literary publications, but more recently the emphasis has been towards promoting new computer programs.

"Big companies are more inclined to listen to an agency rather than to deal with individuals", she said.

"Using an agent makes the possibilities of getting a good program on to the market that much better".

Many of Marjacq Micro's clients started out as devoted BBC Micro programmers – indeed many of them still prefer it to more modern machines.

"We are always on the look out for good BBC Micro software. There is a vast user base for the machine and new programs are always welcome", she said.



Sir Clive regrets

THE Archimedes seems to have found itself another fan in the form of Sir Clive Sinclair.

He publicly sang the praises of the machine's Risc-based architecture when he provided the keynote speech at the recent RITA awards ceremony.

At the same time, however, he warned that despite being in a strong position with the tech-

nology, British companies like Acorn could eventually lose out because this country has no silicon manufacturing plant.

"We in this country do not have a single world standard wafer fabrication line", he said. "Korea has several, Japan dozens and America has a great many too.

"We do not have one. I think this is a great shame and a very serious matter".

Buy a Mitsubishi disk drive direct and you save more than money.


You're looking at a more economical and convenient way of buying a Mitsubishi disk drive. Because now you can order a 5¼" floppy disk drive from one of the world's leaders – direct from this page.

With prices that start from £99 (plus p&p) this will save you money. With only a walk to the post box involved it will save your soles too.

The four Mitsubishi disk drives offered here are all BBC Micro compatible. Each comes with a 2-year warranty from the manufacturer that's famed for reliability. And all are boxed and ready to plug into your system the moment they arrive.

So fill in the coupon here and return it with your remittance.

It's the direct route to a better disk drive.

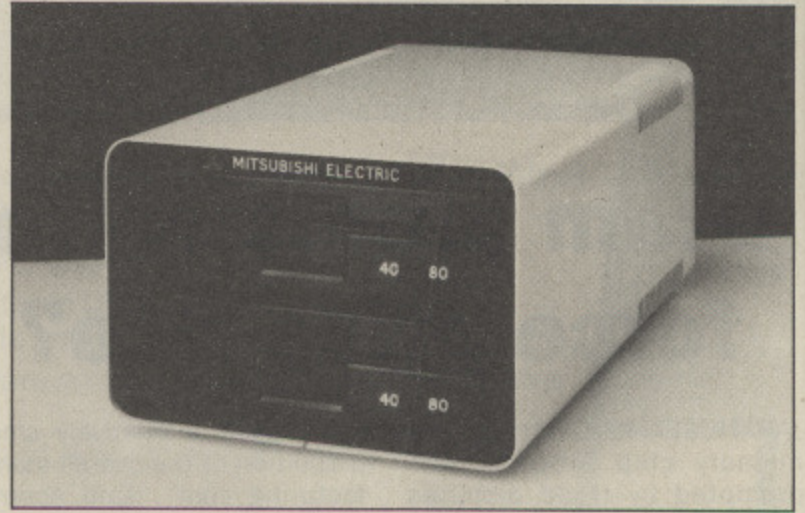


MITSUBISHI DISK DRIVES

Mitsubishi Electric UK Limited,
Travellers Lane, Hatfield,
Herts. AL10 8XB.
Tel: (07072) 76100.
Telex: 296196.
Fax: (07072) 78692.



TO: Mitsubishi Electric UK Limited, Travellers Lane,
Hatfield, Herts. AL10 8XB.

Please send me (tick box applicable):

- | | | |
|--------------------------------|--------------------------|------------------|
| MF 50 DC Single Drive No PSU | <input type="checkbox"/> | £99.00 + £8 p&p |
| MF 55 DC Double Drive No PSU | <input type="checkbox"/> | £199.00 + £8 p&p |
| MF 50 AC Single Drive with PSU | <input type="checkbox"/> | £119.00 + £8 p&p |
| MF 55 AC Double Drive with PSU | <input type="checkbox"/> | £229.00 + £8 p&p |

I enclose a cheque/P.O. made payable to 'Mitsubishi Electric UK Ltd.'

Name: _____

Address: _____

Allow 28 days for delivery.

MU5

Ne
sup

LOOKIN
ition a
school
appoint
direct
keting

With
based
network
qualifi
ings fo
"Edu
plank
busine
mana
Colem

"Bu
learnt
terms
needs
dema
target
and e
extrem

"We
marke
suited
devel
lan
enthr
comr
excel

HUN
hard
excit
lates
seen
Micro
the
West
Alr
impr
tors
num
bigg
pric
disc
Ar
be
num
proc
Slop
they

NEWS *beat*

New sales supremo

LOOKING to build on its position as market leader in the schools sector, Acorn has appointed Ian Laurence as director of sales and marketing.


With a background in micro-based multi-user systems and networking products, he's well qualified to identify new openings for the company.

"Education is quite firmly the plank on which the rest of our business is built", said Acorn's managing director, Harvey Coleman.

"But the lessons that we've learnt supplying schools — in terms of understanding users' needs and meeting their demanding price/performance targets for quality, flexibility and ease of use — have been extremely valuable.

"We now see a number of market sectors that are ideally suited to the products we have developed".

Ian Laurence is particularly enthusiastic about Acorn's commitment to technical excellence, as embodied in the

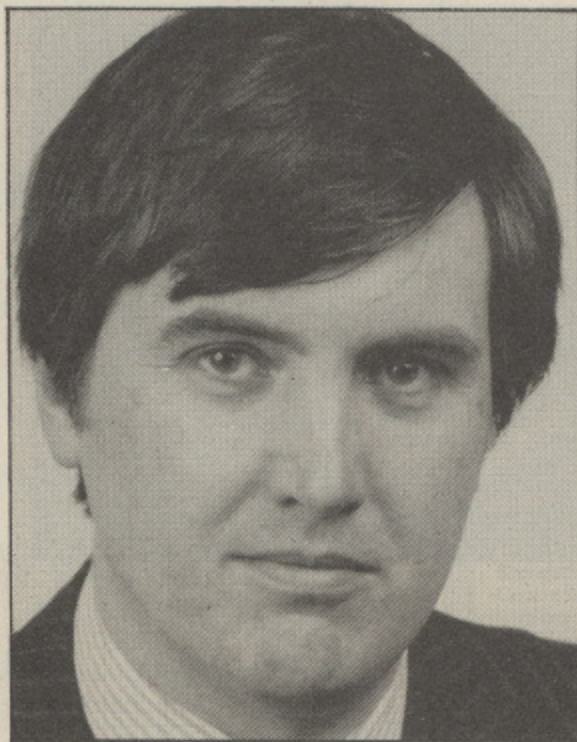

Ian Laurence:
"Acorn is in an enviable position as one of Britain's leading computer manufacturers"

Archimedes. "The power that this technology offers coupled with the knowledge and experience of an installed base of over a million computers puts us in an enviable position as one of Britain's leading computer manufacturers", he said.

"I am extremely excited at the numerous opportunities that I have discovered in the short time that I have been with the company".

False move

IN our review of BBC Soft's bridge program, Black Queen — page 32 of the March issue of *The Micro User* — we inadvertently supplied the wrong telephone number.

The correct contact details are: BBC Soft, PO Box 234, London SE1 3TH. Tel: 01-576 0548.

Hush hush add-ons for BBC Micro

HUNDREDS of software and hardware bargains, plus exciting demonstrations of the latest Acorn technology, can be seen at the Electron & BBC Micro User Show, to be held at the New Horticultural Hall, Westminster, London.

Already the list of bargains is impressive, and many exhibitors have promised that the number of discounts will be bigger than ever — with reduced prices on software, printers, discs and modems.

And as always the show will be the launching pad for a number of exciting new products. Companies such as Slogger and PRES, say that they are working on a range of

new add-ons for the BBC Micro that will further enhance the machine's capabilities and power.

Because of the nature of the products, they are keeping the developments a closely guarded secret until the show, but the companies say that the new items represent a huge financial investment and commitment to the machine.

Throughout the show there will be demonstrations of Acorn In Action. A team of experts will be demonstrating the very latest technology and showing how it is helping to bring new hope to sufferers of the eye disease glaucoma. There will also be a spectacular computer

controlled laser light show, as well as demonstrations of a program developed by an amateur astronomer to detect distant galaxies.

And as if that was not enough, you will also be able to see your own heartbeats displayed, measure your manual dexterity, and hear your own voice backwards — all courtesy of the BBC Micro.

So whatever your interest there will be lots to see, do and buy at the Electron & BBC Micro User Show, at the New Horticultural Hall, Westminster, London, from May 13 to the 15.

For details of cut price admission tickets see Page 38.

Beebug problem

TECHNICAL problems with Beebug's internal modem for the Master 128 have now been ironed out, but BAPT approval is still not forthcoming because of a very sticky problem.

After sorting out a minor power supply fault on the new modem, Beebug discovered that the little green sticker that signifies all is well with the product failed to meet the exacting standards demanded by the BAPT board.

No matter how good a piece of communications hardware may be, if the sticker can't stand up to being washed down with petrol or water then approval will not be given.

However, new labels have been ordered and Beebug (0727 40303) says that the Master 128 internal modem is expected to be on sale shortly. Price £119.

Shaping up

AN upgrade to the popular Pineapple PCB drafting program is now available along with a second rom which gives full automatic track routing capabilities.

Pineapple (01-599 1476) says that the autorouting option, which comes on a separate 16k rom, will work on a standard BBC Micro.

Price £85 for the PCB program and £110 for the autorouting rom.

Price cut

THE producer of best-selling software package Mini Office II — Database Software (0625 878888) — is passing on the benefits of success to its customers.

With development costs now covered, the price of the company's Mini Office II rom board for the BBC Micro has been slashed by more than £10 to £49.

NEWS *beat*

Rescue mission

THE latest offering from the Superior stable (0532 459453) – tentatively titled *Exile* – stems from the imaginations of Jeremy Smith of Thrust fame and Peter Irvine, author of *Starship Command*.

Exile comes with the Elite-style of packaging – a map and a novella relating the history of the ill-fated landing party that first set foot on a hitherto unexplored planet.


Your mission is simple: Rescue and destroy – rescue the landing party and destroy the base before the mad professor launches his man-eating worms on an unsuspecting universe.

The gameplay – spread across more than 200 smooth-scrolling screens – is innovative, with realistic movement, excellent graphics and complementary digitised sound.

New line in modems

THE UK's fastest growing electronic mail service – MicroLink – has launched its own range of officially approved low-cost modems, backed by comms software, for the BBC Micro.

The MicroLink entry-level

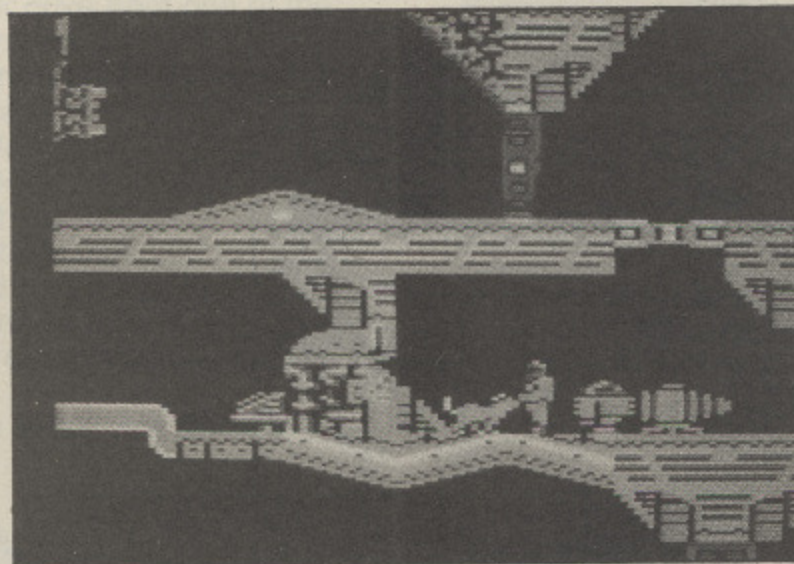

Screen shot from *Exile*

modem offers two operating speeds – 1200/75 and 300 baud – while the multi-speed modem includes the faster 1200/1200 baud and is fully Hayes compatible.

It also offers many sophisticated functions such as auto-answer and auto-dial. Both modems are accompanied by leads and comms and word processing software adapted from the Mini Office II suite.

The entry-level modem is priced at £99, the enhanced, multi-speed model at £169.

"We are delighted that we have been able to achieve such a remarkable price breakthrough", said Derek Meakin, head of MicroLink.

"The multi-speed modem really is an exceptional product, and there is nothing

else on the market that comes anywhere near the £169 price mark".

A unique feature of both packs is that purchasers will be entitled to one month's free access to Britain's most popular electronic mail service, Telecom Gold, of which MicroLink is part.

Help? Of course...

HELP is at hand for anyone who wants to get a little more from their BBC Micro or Archimedes.

Acorn, aware that a lot of people have a lot of questions – and that there's nowhere to get them answered easily – is introducing a series of low-cost

Micros in the House

BBC Micros were on the agenda at the House of Commons recently.

Archie Kirkwood, Liberal Scottish affairs spokesman, wants the government to give a lead to schools looking to replace their BBC Bs.

He's especially concerned that earlier decisions to buy BBC Micros, often prompted by the DTI's Micros in Schools campaign, have led to schools being trapped in an Acorn "cul-de-sac".

And while schools will be looking at the Archimedes as the natural upgrade path, he feels that consideration ought to be given to IBM machines – which users are more likely to encounter once they leave school.

At the moment, the government does not issue guidance to education authorities. In the case of Scotland, advice is provided by the Scottish Council for Educational Technology.

training courses.

"Acorn has long had a policy of insisting that its dealers attend courses", said Mike Howieson, Acorn's training manager.


"But up until now the company hasn't had anything to help the person who bought the machine".

One-day courses will include such topics as basic familiarisation with the Archimedes range, application software and hints and tips on converting Model B and Master software to run on the Archimedes.

Programmers have not been neglected and introductory courses are available on C and ARM assembler.

Two-day workshops are also on the cards, scheduled for the Easter and Summer holiday periods.

Fees – much lower than those normally charged – will start at around £65 a day.

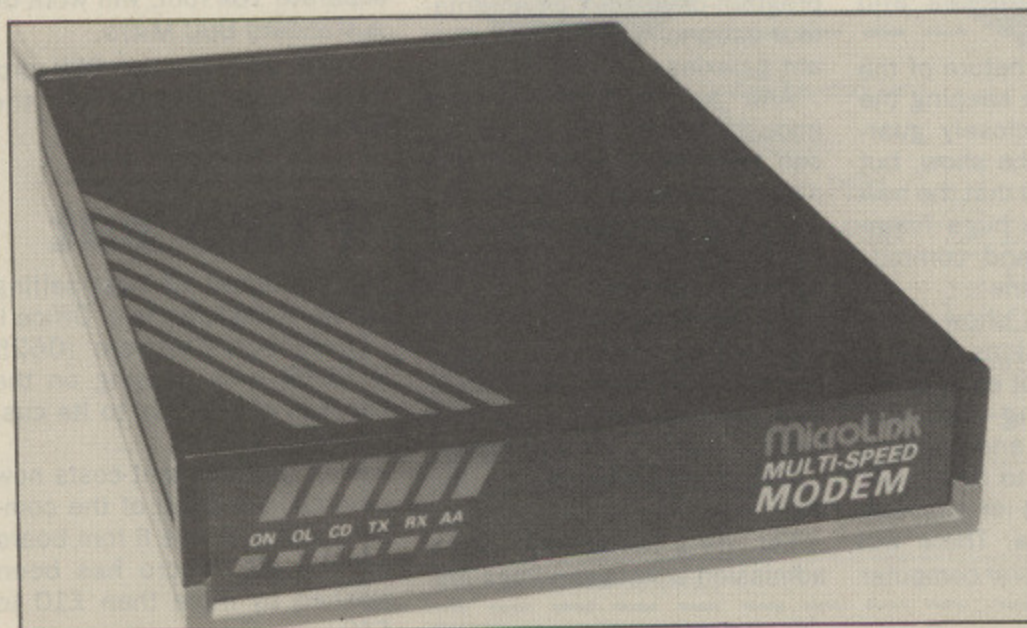

MicroLink's multi-speed modem

THE GALL CHA

THIS MONTH LAST MONTH

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

Star leng Stev ing with Play

THE GALLUP CHART

TOP 20

BBC SOFTWARE

THIS MONTH	LAST MONTH	TITLE (Software house)	TAPE PRICE
1	1	STAR WARS <i>Domark</i>	9.95
2	19	DOTTY <i>Mastertronic</i>	1.99
3	2	WINTER OLYMPIAD <i>Tynesoft</i>	9.95
4	5	LEAGUE CHALLENGE <i>Atlantis</i>	2.99
5	4	LIFE OF REPTON <i>Superior</i>	6.95
6	3	PLAY IT AGAIN SAM <i>Superior</i>	9.95
7	6	10 COMPUTER HITS VOL 4 <i>Beau Jolly</i>	9.95
8	14	FIVE STAR GAMES 3 <i>Beau Jolly</i>	9.95
9	10	BONECRUNCHER <i>Superior</i>	9.95
10	8	GRAND PRIX CONSTRUCTION SET <i>Superior</i>	9.95
11	12	PALACE OF MAGIC <i>Superior</i>	9.95
12	13	SPITFIRE 40 <i>Mirrorsoft</i>	9.95
13	●	PHANTOM <i>Tynesoft</i>	7.99
14	9	SURVIVORS <i>Atlantis</i>	2.99
15	7	SPELLBINDER <i>Superior</i>	9.95
16	●	PLAN B2 <i>BugByte</i>	1.99
17	●	IMPACT <i>Audiogenic</i>	9.95
18	●	AROUND THE WORLD <i>Superior</i>	6.95
19	●	COMPUTER HITS 5 <i>Beau Jolly</i>	6.95
20	●	PAPERBOY <i>Elite</i>	9.95

Compiled by Gallup/Microscope

Star Wars retains last month's position, but is being challenged by Mastertronic's Dotty. Blue Ribbon's re-release of Steve Davis Snooker is another budget game worth watching over the next month. There are six new and re-entries, with compilations holding their own as always - look out for Play It Again Sam 2.

p&h electronics Ltd

5 THE PARADE,
YATELEY
HANTS
TEL: 0252 877222

24 HR SALES
LINE
0252 878107

3 mins Jct 3 M3
22/24 GUILDFORD ROAD
BAGSHOT, SURREY
TEL: BAGSHOT 0276 74533

Archimedes

SEE OUR VAT INC. PRICES

A305 No Monitor	£750.00	Floppy Disc	£130.00
A305 Mono Monitor	£800.00	20 Mbyte Hard Disc + Podule ...	£540.00
A305 Colour Monitor	£975.00	Podule Back Plane	£42.00
A310 No Monitor	£840.00	ROM Podule	£64.00
A310 Mono Monitor	£900.00	I/O Podule	£85.00
A310 Colour Monitor	£1050.00	Midi add-on to IO	£31.00
A310 No Monitor+MS-Dos	£900.00		
A310 Mono Monitor+MS-Dos ...	£950.00	MASTER SERIES	
A310 Colour Monitor+MS-Dos	£1120.00	Master 128	£420.00
A400 Series (Please call)	POA	Master Turbo Module	£115.00
ARCH-PODULES/UPGRADES		Master 512 Module	£210.00
0.5 Mbyte RAM for 305	£95.00	Master Eprom Cartridge	£12.50

PSION HAND HELD

FREE CARRIAGE ALL PSION ITEMS

Psion Organiser II Mod CM	£90.00	Finance Pack	£27.50
Psion Organiser II Mod XP	£125.00	Maths Pack	£27.50
8K Datapack	£12.00	Spelling Checker	£27.50
16K Datapack	£18.50	Comms Link-PC/XT Plug	£55.00
32K Datapack	£32.00	Mains Adaptor	£12.00
64K Datapack	£55.00	Organiser Finger/Letter	£32.00
128K Datapack for XP	£90.00	Diary Link	£12.00
32K Rampack for XP	£50.00	Mini-Formatter	£32.00
Spreadsheet for XP	£36.00	Complete Guide Book	£9.50
Comms Link Adpt to BBC	£12.00		

AMSTRAD SYSTEMS

PCW 8256	£333.50	1640 DD CD	£805.00
PCW 8512	£442.75	1640 HD CD	£1127.00
PCW 9512	£540.50	1640 SD ECD	£882.50
1512 SD MM	£442.75	1640 DD ECD	£954.50
1512 SD CM	£598.00	1640 HD ECD	£1288.00
1512 DD MM	£552.00		
1512 DD CM	£707.25	NEW LAPTOP	
1640 SD MD	£546.25	PPC 512S Single Drive	£448.00
1640 DD MD	£644.00	PPC 640S with Modern	£545.00
1640 HD MD	£966.00	PPC 512D Dual Drive	£540.00
1640 SD CD	£707.25	PPC 640D with Modern	£640.00

VAT inclusive

Z88 LAPTOP SPECIAL £265.00

Cumana Disc Drives

(The best and Beab approved) See our low prices

CSX100 100K 40T	£105.00	CDX800/S Dual 400K 40/80 Switchable ..	£260.00
CSX400/S 400K D/S 40/80T Switchable	£140.00	CD800/S Dual 400K 40/80With Power	
CS100 100K 40T With Power supply	£135.00	supply	£315.00
CS400/S 400K D/S 40/80 With Power		1770 Upgrade	£50.00
supply	£165.00		

Panasonic KXP1081 £165.00 inc VAT

ATARI COMPUTERS

520	£285.00	SM125 Mono Monitor	£140.00
1040 + Mono Monitor	£475.00	SC1224 Colour Monitor	£375.00

TOP DISC GAMES

Skirmish	£11.00	Bone Cruncher	£12.50
Kourtyard	£11.00	Grand Prix Construction Set	£13.50
Quest	£10.50	Paperboys	£14.50
Play It Again Sam	£11.00	Life Of Repton	£7.50

AMX MOUSE PRODUCTS

New AMX Mouse	£34.00	Extra Extra	£19.00
New Mouse + Super Art	£72.00	Design	£63.00
Stop Press	£38.00	3D Zicon	£23.00
Super Art	£38.00	Desk	£22.00
Max	£18.00	Mouse Mat	£6.00
Page Maker	£45.00		

Prices include VAT at 15%.
Instant Credit up to £1000 for callers only at both shops.

Order by Phone or Letter

Cheques to be made out to:

P&H ELECTRONICS LTD.

22/24 GUILDFORD ROAD

BAGSHOT, SURREY GU19 5JN

Carriage Costs (Including BFPO) Per Item

Books, Software	Carriage Free	Disc Drives	£7.00
Upgrades, Accessories etc.	£5.00	Micros, Monitors, Printers	£9.00

NEWS *beat*

New look at images

WHAT is claimed to be the first printer driver for the BBC Micro to take advantage of the highest resolution capabilities of Epson-compatible printers has been released by Silicon Vision.

The standalone package is also claimed to produce near plotter quality when used in conjunction with the company's Realtime Solids Modeller package.

Known as Super-dump it can print hard copy at resolutions of 1920x1024 as opposed to the usual 640x256.

Silicon Vision (01-422 2274) says that the program does not use screen images directly but instead uses text files of VDU codes that represent the image to be printed.

Price £19.95.

First Word Plus for Archimedes

THE popular word processing package First Word Plus has been ported to the Archimedes by GST.

Acornsoft, which is marketing the package, says that the version for the Archimedes features a 60,000 word check-as-you-type spelling checker.

Full cut, paste, search and replace facilities are incorporated and the on-screen display is claimed to be wysiwyg.

Price £99 from Acornsoft (0223 214411).

CAD/CAM packages

TWO new CAD/CAM packages for the BBC Micro – Easicad and Easicam – have been released by Metrotec (091-236 2401).

The packages enable the user to produce 2D graphic



Away from computers, Julia Schofield and her husband enjoy sailing their motor cruiser on the Thames

Blind computer consultant wins a top award

THE work of blind computer consultant Dr Julia Schofield has been recognised with a prestigious Woman of the Year Award.

Dr Schofield, who is well known for her work using BBC Micros and Masters to help disabled people, received a sculpture and £1,000 for the most notable achievement by a blind or partially sighted person.

The judges said she was chosen "because of her keen interest in other handicapped people as well as her own remarkable career".

Only two days after the award, the latest adaptation for a BBC Master – an overbed computer trolley – left Julia Schofield Consultants in Surrey for the Royal Victoria Hospital in Belfast to help a young girl suffering from leukaemia.

The consultancy is also working with the Archimedes

and has recently helped install six of the machines in a school for the visually handicapped. Voice synthesisers, large print, networking and colour printing were all required.

Among the latest work is a driving instruction interactive video system to work on the Archimedes.

Dr Schofield, who has also been called upon to offer her expertise in Australia, says that about a third of her consultancy's work at present is connected with BBC Micros.

Blind from birth, Dr Schofield became the first person with such a handicap to take a degree in computer science.

She went on to take up a research post at the National Physical Laboratory in Teddington where she led a team concerned with designing solutions to man/machine problems.

drawings, then output the technical information to a lathe for the production of components.

Easicad is used to prepare technical drawings with hatching, dimensions and text. Other features include drawing of lines, arcs, circles, boxes and ellipses together with rotation, mirroring, blend, intersection, tangents, window, zoom, pan and grid.

The companion program – Easicam – uses the data from Easicad to produce a CNC part program which can be downloaded to a milling machine.

Metrotec claims that with Easicam it is possible to trace over the required shapes, set up the machine tooling, and cycle and identify shapes.

Part programs are automatically prepared and it is also possible to verify the cutter toolpath and simulate machine operations.

Price £275 each.

Caring computing

THE first issue of a publication intended to promote the effective use of computers in meeting special needs is now available.

Published by SNUG – the Special Needs User Group – Special Needs Computing is aimed at a wide range of readers, including teachers, doctors and probation officers.

SNUG, a non-profit making organisation, hopes to publish the magazine quarterly. Content includes news, reviews, letters and practical articles contributed by people who work with computers in a wide range of ways.

Membership of SNUG, which includes SNC, costs £4 per year – and written contributions are always welcome.

Further details are available from Jeff Hughes (0744 24608) or Peter Whitby (0744 23078).

Steve's back

YOU can't keep a good game down. At least that's the opinion of Blue Ribbon Software, which has re-released the Steve Davis snooker program for the BBC Micro.

Originally released on the CDS label, the game sold over 150,000 copies and was hailed as a break-

through in computer programming.

Blue Ribbon Software (0302 21137) says that the simulation features a computer-play option, friction factor, spin control and a fast shot facility.

Price £4.99 on disc and £1.99 on cassette.

ARCHIMEDES & BBC SOFTWARE

INTER-CHART

A general purpose chart and graph plotting program that can display data in the most easily understood format—graphically.

While it integrates directly with other members of the 'INTER' family it can also accept data from ASCII files, produced by WORDWISE, VIEW and programming languages such as BASIC.

Supports line, and bar graphs, pie charts and also scatter graphs. These may be automatically scaling, or the user may view any portion of the scale so allowing 'zooming' into any area of interest.

Pie charts may have highlighted segments (pulled out) with the values optionally displayed as percentages.

All graph displays may have optional text headings or messages positioned anywhere on screen. These are saved with the graph and may be edited at any time.

Multiple graphs can be held in memory at the same time. Any number of graphs may be overlaid allowing easy comparisons etc. (Not applicable to pie charts.)

Graphs may be displayed in any BBC graphics mode. The colours of bars, lines, or segments may be altered from a simple table of colours. In addition special striped colour combinations and a variety of cross hatching styles are available for bar charts.

Where appropriate either axis may be displayed with a log or linear scale, and optional dotted graduation lines are available.

INTER-CHART has built in screen dump routines for EPSON matrix printers and compatibles. Other screen dump routines may be used from within (or external to) INTER-CHART for other printers or plotters.

BBC ROM—£32.00+VAT
(£36.80 incl.)

Archimedes ROM £25+VAT (£28.75 incl.)

INTER-WORD

The ultimate word processor for the BBC Micro.

The most comprehensive WYSIWYG image of the final page showing at all times, page breaks, headings, footings, bold text, underlines etc, ensuring the page on screen looks as close as possible to the final printout.

Works in 40, 53, 80 or a special 106 column screen mode and offers super-fast scrolling in all modes, even sideways scrolling if necessary.

All margin and tab settings are controlled by rulers placed in the text. These may be altered by moving the cursor onto the ruler and simply dragging the required margin or tab to the new position. All text controlled by the ruler is instantly re-formatted to the new settings.

Pull down menus may control nearly all operations—no complicated commands to remember. This ensures that it really is easy to use.

Printer control menu allows easy access to all printers' special effects and allows easy configuring to any printer. Printer codes may be saved and re-loaded—no need for special printer drivers.

A special multi-file mode enables very long documents to be generated, even to the size of a disc, yet enables simple movement to any page in the document.

File selector for all file operations. This enables fast and very simple file name selection when saving, loading etc.

Integrates directly with other members of the INTER family and with SPELLMASTER, the fastest and most flexible spelling checker available for the BBC.

BBC ROM £49+VAT (£56.35 incl.)

Archimedes ROM £39+VAT (£44.85 incl.)

INTER-SHEET

A simple to use, but very powerful spreadsheet program offering many unique features.

The fastest spreadsheet available for the BBC Micro.

The largest capacity spreadsheet. This means more data and larger spreadsheets are possible.

40, 80 and a special 106 column screen mode. Especially useful for viewing large sheets.

Multiple spreadsheets in memory at once. Data from one may be included in the calculations of other sheets.

Super-fast replication allows anything from a single box to an area of the sheet to be copied to any other position. Formulae may be automatically updated relative to their new positions.

Simple WORDWISE like cursor movement.

A unique windowing system enables any row or column to be fixed on screen, while allowing the sheet to scroll underneath. Simpler than other windowing systems yet more flexible.

While it integrates directly with INTER-WORD it can also transfer data to and from other word processors such as VIEW and WORDWISE.

A large range of standard maths functions is included in addition to special spreadsheet functions such as AVERAGE, COUNT, IF..., LOOKUP, MAX, MIN, SUM etc.

Simple auto-prompting commands structure. If you can't remember the complete command syntax, just enter the first letter and INTER-SHEET will prompt from then on.

BBC ROM (2 chips) £49+VAT
(£56.35 incl.)

Archimedes ROM £39+VAT (£44.85 incl.)


All the above ROMs are fully compatible with DFS, ADFS, Econet, all BBC machine variants and Watford or Aries shadow RAM boards.

MEGA 3


MEGA 3— the single chip solution

A new single 1 megabit chip containing complete versions of all the above programs is now

available. This replaces 4 chips and so offers a more compact and more economic way of obtaining the above three programs.

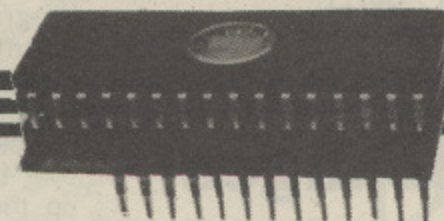

BBC ROM £85+VAT (£97.75 incl.)
Archimedes ROM not yet available.




Computer Concepts Ltd

Gaddesden Place
Hemel Hempstead
Herts HP2 6EX.
Telephone 0442 63933

ACCESS & BARCLAYCARD ACCEPTED

SPECIAL OFFERS FROM VIGLEN

PANASONIC PRINTER KIT

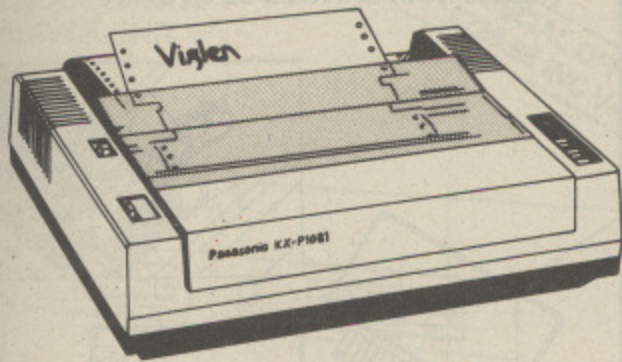

The Panasonic KX-P1081 come complete with £45.00 worth of accessories FREE including tractor feed and roll feed units with paper, printer cable, and a specially designed metal printer stand. Features include:


- ★ 120 cps draft printing 24 cps NLQ
- ★ IBM and Epson compatibility through dip switch settings
- ★ Prints 80 columns on A4 cut sheets, continuous stationery or roll paper 9 x 9 draft and 18 x 23 NLQ

Stock Code	Description	Price inc. VAT
SP079	Panasonic KX-P1081 plus accessories	£185.95

Please add £8 for insured courier delivery.

MEGA BYTES FOR MINI BUCKS

NEW LOW PRICES

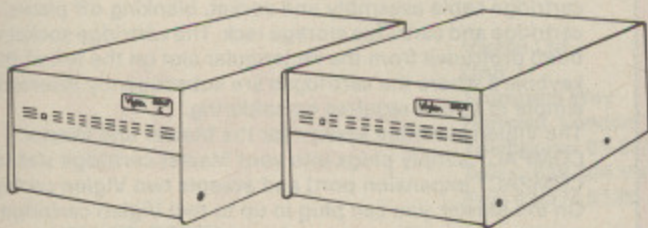

Plug in 20 to 112 Megabytes of extra storage with the Viglen Winchester system.

The Viglen Winchester is ready to plug in and use on a BBC Master micro; for a BBC B or B plus you will merely need to fit the Acorn ADFS Rom. The Winchesters are 100% compatible with the Acorn Winchester and Acorn ADFS and will also work with the Acorn Master 512 board with DOS plus.

Drive 1 Winchesters are also available for backup or just more storage and simply plug into the back of the Drive 0 unit.

The Winchester package consists of: Winchester unit (cased with controller boards, power supply and fan), Master reference Manual part 1, Winchester user guide and Winchester utilities on disk (such as formatter, verifier, ADFS menu and sophisticated backup program allowing you to make fast backups on DFS disks, ADFS disks or Drive 1 Winchester).

Stock Code	Description	Price inc. VAT
Drive 0 Single		
SP0150	VB20 20Meg Viglen Winchester	£499.00
SP0152	VB28 28Meg Viglen Winchester	£519.00
V155	VB40 40Meg Viglen Winchester	£799.00
V156	VB56 56Meg Viglen Winchester	£899.00
Drive 1 Second Drive		
SP0160	VB120 20Meg Drive 1 Winchester	£479.00
SP0162	VB128 28Meg Drive 1 Winchester	£499.00
V165	VB140 40Meg Drive 1 Winchester	£739.00
V167	VB156 56Meg Drive 1 Winchester	£769.00
V157	20MB Tape Streamer Backup	£689.00
V503	Acorn ADFS Rom and Manual	£29.95
	(Only necessary for BBC B or B Plus)	


Please add £8 for insured courier delivery.

Available for use with SJ research file server at no extra cost, please specify when ordering.

WINCHESTER

FROM
£99.95
inc. VAT

The finest Japanese disk drives (not Taiwanese imitations) available at the lowest prices.

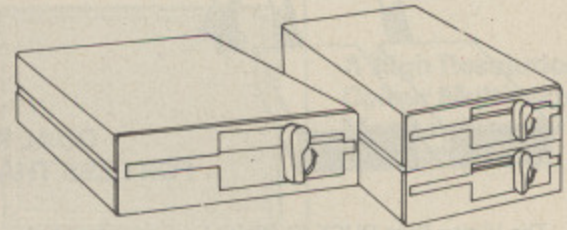

All disc drives are supplied with a manual, packed utilities disc and a full 12 Months warranty (2 Year Warranty available) and are ready to plug in and use on a BBC B (fitted with a DFS) B + or Master micro. 40/48 Track drives have a switch which enables operation in either 40 or 80 track mode.



The capacity quoted are given in single density mode; for double density mode (1770 DFS + ADFS as in the Master) the capacities should be approximately doubled.

An integral power supply is not necessary as the disc drives run from the micro's power source however should you require drives with their own power supply, these are also available. If your BBC B micro does not have a DFS fitted then you will also require the Acorn dfs kit. These are available from Viglen.

Stock Code	Description	Price inc. VAT
SP014	400K Single Drive 40/80T	£99.95
SP030	400K Single Drive 40/80T + PSU	£109.95
SP019	800K Dual Drive 40/80T	£189.95
SP020	800K Dual Drive 40/80T + PSU	£209.95
VPD0240	100K Single Drive	£105.95
VPD0241	400K Single Drive 40/80T	£113.00
VPD0242	200K Dual Drive	£195.95
VPD0243	800K Dual Drive 40/80T	£219.00
VPD0245	100K Single Drive + PSU	£119.95
VPD0246	400K Single Drive + PSU	£135.00
VPD0247	200K Dual Drive + PSU	£209.95
VPD0248	800K Dual Drive 40/80T + PSU	£235.00
VPD0249	800K Dual Drive 40/80T + PSU in Metal Bridge Unit	£265.00
V0060	3.5" 400K Single Drive	£95.95
V0061	3.5" 800K Dual Drive	£199.95
V0062	3.5" 400K Single Drive + PSU	£135.00
V0063	3.5" 800K Dual Drive + PSU	£199.00
V0064	3.5" and 5.25" 800K Dual Drive	£219.00
V0065	3.5" and 5.25" 800K Dual Drive with PSU	£249.00

Please add £8.00 for insured courier delivery.

DISK DRIVES

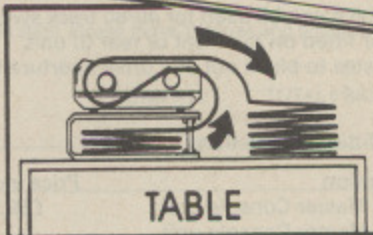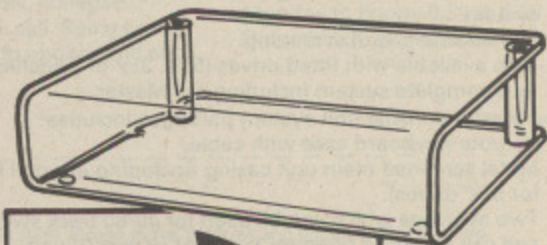

The Viglen printer stands are beautifully finished in clear perspex and raise the printer high enough to put continuous stationary underneath.


Stock Code	Description	Price inc. VAT
V490	80 Column-Printer Stand (15" x 13" x 3.5")	£19.95
V491	136 Column Printer Stand (23.5" x 13" x 3.5")	£29.95

Please add £3 P & P

PRINTER STANDS

SPECIAL OFFERS FROM VIGLEN

DUCKS

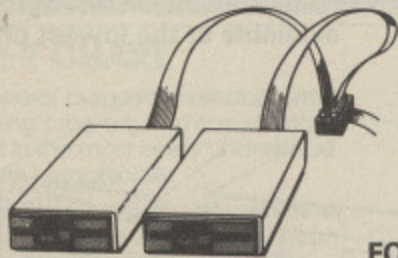

DUAL DRIVES FOR LESS THAN £17!


The Viglen Data DUCK (Dualling Up Connector Kit) converts any two single drives to a dual drive instantly. Simply plug the duck into the micro's disk drive socket and plug two single drives (any type and any make) into the duck to obtain a dual drive system accessed as drive 0 (and 2 if double sided) and drive 1 (and 3 if double sided). If neither single drive has its own power supply then you will require a Viglen power DUCK in order to obtain two disk drive power sockets from the micro.

- ★ No soldering simply plugs in.
- ★ No need to take disk drives apart to change links.

Stock Code	Description	Price inc. VAT
V084	Viglen data duck	£16.95
V085	Viglen power duck	£7.95

Please add £2.50 for P & P.

MASTER TRANSFORMATION

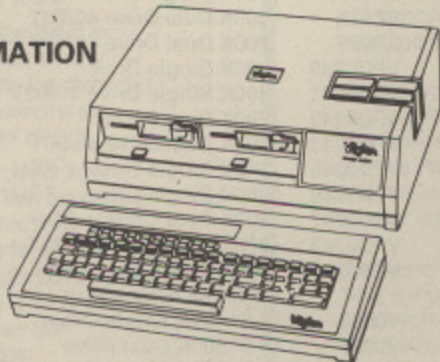

Give your BBC Master micro the professional PC look by replacing your existing lid with this smartly styled package. The system is strong and constructed in high impact ABS colour matched to the BBC Master and it gives your Master a very neat and impressive look.

- ★ Will support monitors including up to 16" TV.
- ★ Can house two 5¼" disk or Winchester drives.
- ★ Capable of housing 3½" drives.
- ★ Will accept Acorn cartridges and the Viglen Master Cartridge system.
- ★ Full internal metal screening.
- ★ Also available with fitted drives (5¼", 3½" or Winchester) or as a complete system including the Master.

The Master console unit system packages includes:


- ★ Remote Keyboard case with cable.
- ★ Metal screened main unit casing (including internal fittings for 5¼" drives).
- ★ Two switches which can be used for 40/80 track switching and can be either fitted on the front or rear of unit.
- ★ Two blanking plates to blank out any drive aperture that is not used.
- ★ Full labelling kit.
- ★ Fully illustrated fitting instructions.

Stock Code	Description	Price inc. VAT
V861	Viglen Master Console unit	£59.95
Accessories for the Master Console unit		
V853	Dual Drive data cable for console unit	£9.95
V854	Dual Drive power cable for console unit	£7.95
V855	Power supply for the console unit	£34.95
V866	Fan Kit for console unit	£34.95
V858	Fitting bracket for 3½" drive	£8.95
V851	Viglen Professional Console Unit for the BBC micro	£49.95
	Fitting service available from	£15.00

Please add £8 for insured courier delivery.

CONSOLE SYSTEM

VIGLEN ROM CARTRIDGE SYSTEM

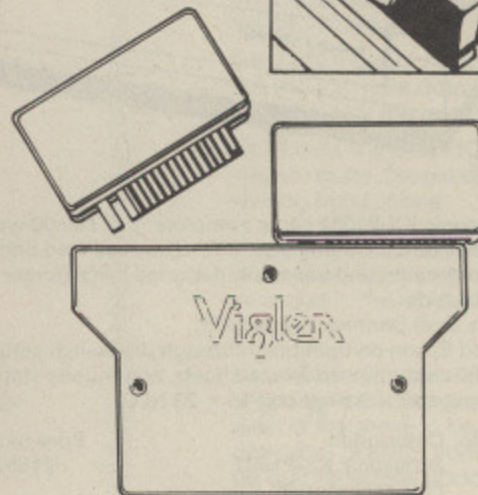

Having fitted the Viglen Rom cartridge system to your BBC, Master or Master COMPACT, you can plug in your Roms/Eproms simply by inserting each one in a Viglen cartridge and plugging in whichever cartridge you want to use. The same Viglen cartridge can be used on all the micros mentioned and there is no need to switch the micro on and off between cartridge changes.

The Viglen cartridge system for the BBC micro consists of the cartridge cable assembly and socket, blanking off plates, 1 cartridge and cartridge storage rack. The cartridge socket when fitted protrudes from the rectangular slot on the left of the keyboard where the cartridges are subsequently inserted. It is simple to fit and requires no soldering.

The Viglen cartridge system for the Master and Master COMPACT simply plugs into your Master cartridge slot (or COMPACT expansion port) and accepts two Viglen cartridges. On the Master you can plug in up to two Viglen cartridge systems thus giving you access to 4 Viglen Cartridges simultaneously. The system comes complete with 2 cartridges and cartridge storage rack. On the Master you can also use Viglen cartridges which have 32 and 64K paged Roms inserted.

Stock Code	Description	Price inc. VAT
V560	Viglen Rom cartridge system for BBC	£12.95
V559	Viglen Rom cartridge system for BBC (low profile)	£12.95
V550	Viglen Rom cartridge system for Master	£14.95
V551	Viglen Rom cartridge system for COMPACT	£14.95
V561	Single Viglen cartridge	£3.45

Please add £2.50 P & P (£00.50 for single cartridge).

CARTRIDGE SYSTEM

DISK DRIVES

LOOK FOR
OUR AMAZING
SPECIAL OFFERS


Acorn 
Authorised Dealer

SPECIAL OFFERS FROM VIGLEN

DISK DRIVES

**DIRECT BRIDGE
BRIDGE UNIT**

**SPECIAL OFFER
£229.95 INC VAT**

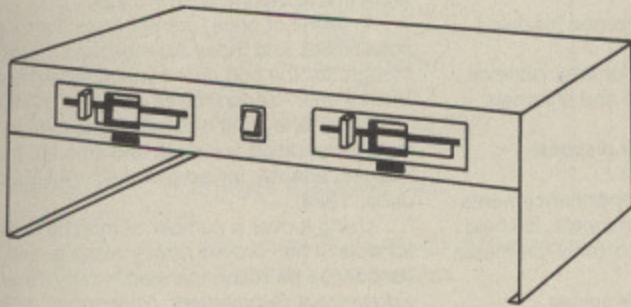

- ★ FRONT PANEL SWITCHING
- ★ 800K DUAL DRIVES 40/80T WITH PSU


Direct disk drives are manufactured to the highest standard using high quality Japanese mechanisms. All drives are supplied complete with user manual and utility diskette.

Stock Code	Description	R.R.P.
SP0249	800K Drive in Bridge Unit with PSU	£229.95

Please add £8.00 for insured courier delivery.

COLOUR MONITOR

★ A VERY SPECIAL OFFER ★

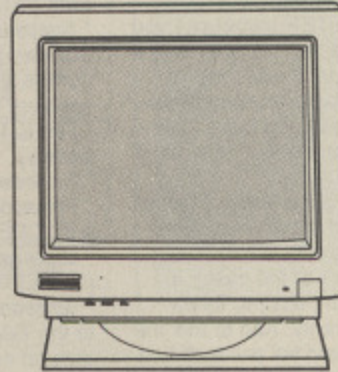

**A High Resolution
Colour Multiscan
Monitor for only
£343.85 inc VAT.**

Just look at the following features:

- ★ Can run modes 18-20 on the Archimedes
- ★ Compatible with Archimedes, Master and BBC Model B
- ★ Manufactured in Japan by Fujitsu
- ★ 14" High Resolution Non Glare screen .31mm dot pitch
- ★ input signals TTL/Analogue, RGBI RGB rgb, RGB analog
- ★ Swivel base included
- ★ Maximum Resolution 800x560 dots
- ★ Scanning Frequencies: 15-17Khz, 21-52Khz, 29-34Khz
- ★ Also 100% Compatible with IBM PC/AT CGA/EGA/PGA/VGA.

Stock Code	Description	Price inc. VAT
VA079	Fujitsu General ME-503 Colour Monitor	£343.85

Please state cable required for Archimedes, Master or BBC B.

Please add £8.00 for insured Courier Delivery.

Viglen

Viglen Ltd.,
Unit 7
Trumpers Way
Hanwell, London W7 2QA
Telephone: 01-843 9903
Telex: 919 304 VIGLEN G
Fax: 01-574 5126

Acorn
Authorised Dealer

Prices correct at time of going to press
and offers are subject to availability



HOW TO ORDER

Simply fill in the coupon or write to us with your requirements enclosing a cheque/postal order or your credit card no. for the total amount. Don't forget to add the cost of delivery. Allow 7 to 10 days for delivery. Credit card holders may order by telephone on our sales hotline 01-843 9903 (8 lines). Orders from overseas should be exclusive of VAT (please deduct 15% from the total cost).

OFFICIAL ORDERS

Official orders from education establishments, Government departments and Plc companies accepted. Viglen has a special education department to process orders and queries from schools, colleges, universities and Local authorities so please ask for our education department when you call. Being one of the major suppliers to the Education market, the experienced Viglen team will be able to understand and help you with your requirements.



Dealer and Trade
Enquiries Welcome:

Showroom opening hours
Monday to Friday 9.30 to 5.30
Saturday by appointment

Fill in and post to Viglen Ltd., Unit 7, Trumpers Way, Hanwell, London W7 2QA. Tel. No. 01-843 9903. Please make cheques and postal orders payable to Viglen Ltd.

STOCK CODE	DESCRIPTION	QUANTITY	TOTAL PRICE

Please find enclosed a cheque/postal order *
I prefer to pay by VISA * ACCESS *
* Tick one please.

Carriage _____

Total _____

Card No. _____ Signature _____ Expiry date _____

Name _____

Address _____

Postcode _____ Tel. No. _____

TELETEXT ADAPTER

Would you like access to free high quality software and over a thousand pages of information, but Prestel access charges and phone bills too expensive? Then read on!

The answer is Teletext. Yes the same system everyone has seen incorporated into television sets, but with a difference. When Teletext is read by a computer you can actually use the data.

The MORLEY TELETEXT ADAPTER introduces you to the world of Teletext at a price that won't break the bank. Inside it you will find the latest in second generation Teletext chip technology, which unlike our rivals who are still using chips designed more than ten years ago, will be fully compatible with any future advances in the Teletext system.


With the Morley adapter you will get a state of the art unit that automatically tunes itself into the required station (no more messing around with screwdrivers or twiddling little knobs in the back of the case), a user friendly menu driven program, easy to follow instructions and a 12 month warranty. Add to this the free downloadable telesoftware and we are sure that you will agree that we are offering you one of the best bargains on the market today.

FEATURES:

* Advanced design uses the latest technology, will handle ANY future enhancements to the Teletext

system e.g.: full field; 8 bit data transfer; 2k pages etc.

- * Simply plugs into the user port.
- * Low power consumption, less than 200ma. Optional power supply available.
- * User friendly menu driven software including extended OSCLI and OSWord commands for access from BASIC programs.
- * Supplied with 16k ATS (Advanced Teletext Software) and 16k support ROM software inc. printer dumps, page spoolers etc.
- * FREE Telesoftware, no access charges (updated weekly).
- * Save selected pages to disc/tape for later retrieval.
- * Full access to all Teletext services and channels e.g.: CEEFAX, ORACLE, 4-TEL.
- * Gives you a real-time clock at your disposal (*TIME).
- * Software upgrades to allow for any enhancements to the Teletext service, e.g.: extra channels, full field data on cable & satellite systems etc. (only the media charge).
- * Easy to follow comprehensive user guides.
- * No hardware limitations, it can for example receive virtually unlimited numbers of channels.
- * Utills disc available including printer drivers allows pages to be selected and dumped direct to a printer

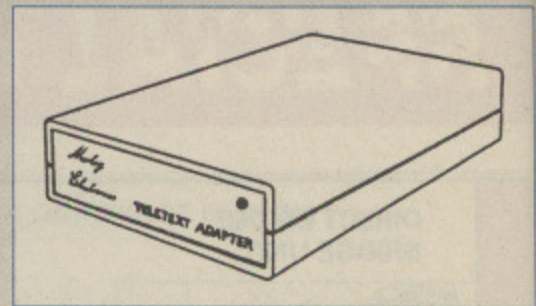

(no more TV or Radio Times to buy).


WHAT THE REVIEWERS SAID:

"...In terms of price, performance, future expansion possibilities and those little touches that show thought for the end user I would recommend the Morley unit."—(*Acorn User*, January, 1986).

"...The Morley unit has been designed to ensure that its operation is simple and smooth. It is the ideal Teletext adapter for school use."—(*A&B Computing*, June, 1986).

"...Using it over a number of months in different schools, it has proved utterly reliable, and may confidently be recommended."—(*The Times Educational Supplement*, September, 1986).

THIS IS THE BIGGEST SELLING TELETEXT ADAPTER CURRENTLY IN PRODUCTION WORLDWIDE, AND COMES WITH A FULL MONEY BACK SATISFACTION GUARANTEE.

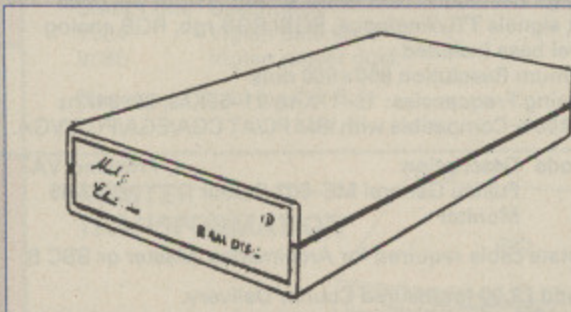

Now available!
The first true MEGA capacity RAMdisc for the BBC, BBC B+ and MASTER computers. This fully compatible unit, currently available in either 1 or 2

megabyte versions comes complete with operating software on ROM, power supply, and a comprehensive user guide.

FEATURES:


One megabyte of RAM connected to the 1MHz bus. Used with the supplied ROM software programs and files may be saved and loaded from the RAMdisc in the same manner as from a floppy disc with a large increase of speed, for example, a 20k mode 0 screen takes about 3-4 seconds to load from disc and about 0.2-0.3 seconds to load from the RAMdisc. The RAMdisc ROM operates as a utility ROM

RAMDISC

working with the current filing system rather than as a separate filing system. Therefore ensures compatibility with any Acorn compatible DFS (not ADFS). The RAMdisc can be selected by a * command to take the place of any drive number from 0 to 9. If the RAMdisc replaces a floppy drive as 0 for example, all commands addressed to drive 0 will be intercepted by the RAMdisc. The default drive number is 4. Any 'Dangerous' *commands such as *COMPACT, *COPY, *BACKUP etc can be intercepted and the BBC's RAM from page 2 to &7FFF saved to RAMdisc workspace, and may be recovered using a *command. This prevents accidental corruption of any programs/data in RAM you may have been using at the time. The filing system wedge ROM supplied supports load/save, byte file access, all relevant OSFSC commands, and contains a formatter verifier and 'sector' editor for use with the RAMdisc. Catalogue structure allows up to 2,688 files.

Well that's the spec., add to this our usual 12 month no quibble guarantee and we're sure you'll agree the Morley RAMdisc is the sensible alternative if increased storage capacity and speed is your requirement.

EPROM PROGRAMMER V2

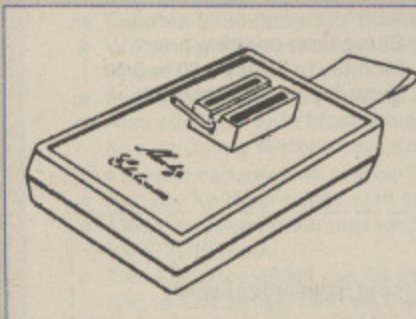

The MORLEY EPROM PROGRAMMER V2 is a small self contained unit that plugs into the BBC or MASTER user port. It comes with a high quality ZIF (zero insertion force socket) and contrasting plastic case. Also included in the package is it's own user friendly menu driven software on ROM or disc.

This state of the art unit, allows programming of 2764 (8k), 27128 (16k), and 27256 (32k) EPROMS. Not only does the hardware allow

programming of the usual NMOS devices, but will handle the new generation CMOS equally as well, and with the average time taken to program a 16k at less than 30 seconds we believe it to be one of the fastest programmers available today.

THE HARDWARE

The Unit is completely under software control, there are no knobs or switches to baffle the novice, and the extended features provided should excite the pro's.

THE SOFTWARE

The comprehensive user friendly software included in the package has two main parts, the first allows EPROMS to be read, programmed, verified and edited, also allowing a ROM image to be loaded or saved to disc. The second is a full ROM management system in its own right, which has a host of useful features and routines, such as KILL and RESURRECT ROM to disable or enable a sideways ROM, dump ROM image to buffer or disc, move ROM image in buffer to sideways RAM, and VIEW-SEARCH any sideways ROM.

The whole system is available now for less than the price of one WORDWISE chip. So get yourself the all new MORLEY EPROM PROGRAMMER V2 today and start using those expansion boards for what they were made for! ROMS. Immediate delivery no quibble 12 month guarantee.

MASTER CARTRIDGE

Designed and manufactured by Care Electronics to Acorn specifications. These high quality Master expansion cartridges will take two 16k sideways ROM's, and will, unlike similar cartridges available from other manufacturers, accept the new second generation programs, such as Computer Concepts Interword and Spellmaster ROM's.

These Cartridges come in a high quality, robust, formed-plastic case, that fits neatly into either one of the Master's cartridge slots.

QUADS—also available quad cartridges, specifications as Duels but 4x16k ROM's.

MASTER SMART CARTRIDGE

This device was designed and manufactured jointly by Morley and Care Electronics.

The Smart cartridge will at the press of a button halt any program running in memory and execute any one of a host of useful built in, or user defined procedures, and once completed will return to the program and continue where it left off. The only limiting factor with this device is the programmers imagination. The Smart cartridge will prove useful to the novice, allowing him to do the simple things like dump any screen to printer, and make backups of protected tape or disc based software, but has an open ended specification for the advanced 'HACKER' allowing advanced programming techniques to be incorporated into almost any program at the touch of a button.

BUILT IN FEATURES (at the press of a button)

- Autosaves computer's entire memory.
- Freeze program at any point.
- Screen dump (any mode) to printer or disc.
- Allows any OSCLI command without disturbing memory.
- Copies 90% of protected software.
- Tape to disc, disc to tape.
- User friendly menu.
- Sound On/Off.

ALL CARTRIDGES COME WITH A 12 MONTH NO QUIBBLE WARRANTY

NEW
PRODUCT


MORLEY MASTER BOARD 'AA'

MORLEY
ELECTRONICS

At long last the add-on all MASTER users have been waiting for, an internal ROM board.

No more need to turn the computer off to insert the cartridge containing the ROM you need to debug the program in memory.

The new MORLEY MASTER BOARD "AA" allows you to have up to 8x16k and 4x32k extra Roms installed inside your MASTER and still leaves the cartridge slots free. This in effect allows your MASTER to support as many as 24, 16k ROMs installed permanently, whilst retaining the standard 4 x sideways ram banks and four banks by using cartridges

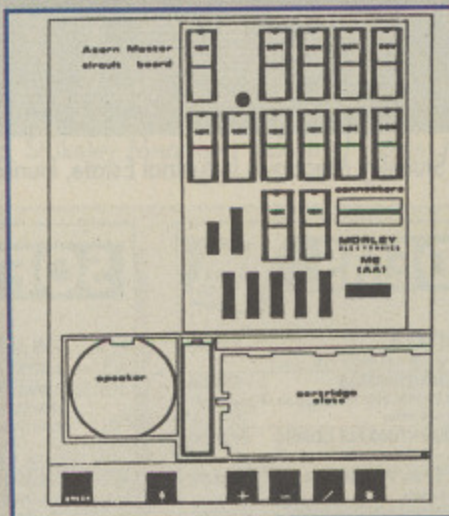

Unit 3, Maurice Road Industrial Estate,
Wallsend, Tyne & Wear NE28 6BY
Telephone: Tyneside (091) 2627507
Telex: 265871 A/B MONREF G
(Quoting Mag 70211)

A staggering 32 ROM images installed and accessible at any time

Included in the package is a utility ROM which has many useful features such as 'FICOPY', a clever file transfer program that transfers files between DFS and ADFS formats or vice versa.

So for less than the price of four external cartridges you get a MASTER BOARD "AA" which with twice the capacity has got to be THE ROM expansion for the serious MASTER user.

The unit comes with the usual Morley, full no-quibble twelve months warranty, and our usual after sales service

THE COMPLETE RANGE OF TELETEXT SOFTWARE from M/B SOFTWARE

***NEW... DESIGN 7 PLUS** - now 'the best' is even better. Held in high regard by reviewers and hundreds of satisfied owners, DESIGN 7 has been further improved, with revised keystrip & even more features. Design/load/save and MODE 7 screen with ease, up to full CEEFAX/Oracle standard. Will convert ANY MODE 7 screen to a BASIC procedure, for inclusion in your own programs. ROM version includes a file copier, printer dumps useable from BASIC etc. B/MASTER/COMPACT.

TELETEXT EMULATORS/SCREEN DISPLAYS/INFORMATION SYSTEMS - A complete range of teletext programs to cater for all needs, with full teletext adapter interfacing.

***NEW... DESFAX** - totally new version - streets ahead of the competition - run your own information/display system. Stores hundreds of screens on dual 80 track drives (96 screens on single-sided 40 track), with access to any screen with a SINGLE KEYPRESS. Lots of special effects - screens can scroll, slide, overwrite etc. Animation, loops, subroutines - send for details - not enough space here to even begin to describe the advanced features!! B/MASTER/COMPACT

***NEW... MASTERFAX** - 84 MODE 7 screens in memory at once. 148 screens possible with cartridge RAM. An advanced teletext/carousel program featuring SINGLE KEYPRESS or 3-digit page selection. Runs entirely from memory - no disc accesses after pages are loaded. Superb animation and other effects. MASTER/COMPACT only.

***NEW... VU-FAX** - 1000 screens and no disc accesses! Screens stored on MORLEY 1MByte RAM DISC. SINGLE KEYPRESS gives instant access to any screen (or emulate teletext). This is the ultimate MODE 7 screen management system - there is nothing else like it. MODEL B/MASTER 128.

***ALSO... MASTERcopy** - DFS/DFS, DFS/ADFS, ADFS/DFS, ADFS/ADFS file copier. Uses the MASTER 128's memory to the full to permit fast disc copying. 31 DFS files to ADFS disc in less than 2 minutes. Creates directories automatically. You will wonder how you ever managed without this program. Described by reviewers as 'unexcelled'. MASTER 128 and COMPACT's fitted with DFS ROMS.

ORDER FORM

To order simply complete and return by post enclosing your cheque/P.O. made payable to Morley Electronics, or by phone during office hours, quoting your ACCESS or VISA number.

Morley Electronics, Unit 3 Maurice Road Industrial Estate, Wallsend, Tyne & Wear NE28 6BY Telephone Tyneside (091) 2627507. Telex: 265871 A/B MONREF G (Quoting Mag 70211)

ALL PRICES INCLUDE VAT @ 15%

Qty.	Item	P&P Rate	Qty.	Item	P&P Rate
Qty. _____	Morley Teletext Adapters	119.83 (a)	Qty. _____	M/B Software Design 7+	9.89 (c)
Qty. _____	Optional Power Supply	10.12 (b)	Qty. _____	M/B Software Desfax	20.01 (c)
Qty. _____	Teletext Utilities on disc	5.98 (c)	Qty. _____	M/B Software DesROM	12.88 (c)
Qty. _____	1 Megabyte RAMdisc	199.87 (a)	Qty. _____	M/B Software Mastercopy Disc	12.88 (c)
Qty. _____	2 Megabyte RAMdisc	349.60 (a)	Qty. _____	M/B Software Mastercopy ROM	14.95 (c)
Qty. _____	Eprom programmer V2	34.50 (b)	Qty. _____	M/B Software Masterfax	29.90 (c)
Qty. _____	Master ROM boards "AA"	46.00 (b)	Qty. _____	M/B Software VU-Fax System inc RAMdisc	249.78 (a)
Qty. _____	Master Quad cartridge	14.95	Qty. _____	5.25" Floppy discs x 10	8.05 (c)
Qty. _____	Care Master ROM cartridges	8.97 (b)	Qty. _____	27128 16k CMOS EPROM	3.68 (d)
Qty. _____	Master Smart cartridge	39.79 (b)	Qty. _____	Info Pack + Demo Disc of all Software	FREE (c)
				Note Teletext Adapters for Master Compact	138.00 (a)

Please delete: Adapter software on ROM/Sideways RAM format/Software on 40/80 track disc

Name _____ Phone no. _____
Address _____
Post Code _____



Cheque No _____ Access/Visa No _____ Amount £ _____

Please add Postage and Packing @ a=£3.00 b=£2.00 c=£1.00 d=£0.65 (when ordering more than one item, add P&P. on highest rate item only)
GOVERNMENT, LOCAL AUTHORITY, AND TRADE ORDERS WELCOME. Please allow 28 days for delivery



PEATREE COMPUTERS LTD

Approved service centre for all Acorn products.

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

HARDWARE

Extra Special Offer!

BBC Master 128 £369.00

ACH001	BBC MASTER 128 128K complete with View, Viewsheet, basic editor. ADFS 1770 DFS	£369
ACH011	TURBO UPGRADE for MASTER 128 65C102 co-processor 4MHz - 64K ram extra high Basic, high editor	£99.00
ACH012	512K MSDOS for MASTER IBM compatible DOS plus 8186 processor	£199.00
ACH015	1770 DFS KIT for BBC B Allows BBC to access disc drives. Allows you to use ADFS as well	£41.00
ACH016	ADFS ROM for 1770 or BBC B+	£24.00
ACH020	32016 CO-PROCESSOR 32 bit processor - Complete with Fortran, Pascal, Cambridge Lisp, C Basic and 32016 assembler	£999.00
ACH021	ACORN CAMBRIDGE WORK STATION 4MB work station with 32016 co-processor	£3400.00
ACP003	MEGAMOUSE High quality UK manufactured - Slip free rubber coated ball - Fully AMX compatible	£49.00
ACH034	ACORN MUSIC 500	£29.00

MODEMS

ACS075	COMMSTAR II Now compatible with Master 128	£29.95
ACP014	PACE NIGHTINGALE 1200/75 75/1200 300/300 baud rates - BT approved complete with cables	£99.00
ACP015	PACE NIGHTINGALE COMBO As above with Constar software	£129.00
ACP020	WS3000V21/V23 MODEM Hayes compatible	£285.00
ACP021	WS4000 SCHOOLS MODEM Autodial, autoanswer - Schools approved	£159.00
ACP029	VOYAGER MODEM	£40.00
ACP031	BBC MICRO VIEWDATA	£49.00

SOFTWARE

ACS047	THE ARTIST SOFTWARE	£39.00
ACS048	ARTIST AND MEGAMOUSE	£79.00
ACS050	ADVANCED DISC INVESTIGATOR Powerful disc utility - Back up most protected discs - Check and repair faulty tracks - Compatible with the BBC B, B+ and the Master	£22.50
AC051	ADVANCED DISC TOOLKIT Compatible with all Acorn products 35 extra commands ADFS formatter and back up plus many more powerful utilities	£27.50
ACS052	MUSIC 500 SOFTWARE Ample software with full manual	£9.95

LEADS

LDS001	BBC TO TV LEAD	£1.25
LDS002	BBC TO GREEN MONITOR LEAD	£2.95
LDS003	BBC TO SONY/KAGA COLOUR MONITOR	£5.95
LDS004	BBC TO MICROVITEC LEAD	£2.20
LDS005	PHONO TO PHONO LEAD	£1.25
LDS006	BNC TO BNC	£2.95
LDS007	BBC TO CASSETTE	£2.25
LDS008	BBC TO ACORN CASSETTE LEAD	£2.25
LDS009	BBC TO CENTRONICS	£9.95
LDS010	BBC TO SERIAL PRINTER	£9.95
LDS011	4 WAY MAINS TRAILING SOCKET	£9.50
LDS012	CABLE FOR MODEM	£4.95
LDS014	MASTER COMPACT PRINTER LEAD	£15.95

COMPONENTS

ACP007	EPROM 27256 32K 32K eprom	£4.95
ACP008	EPROM 27128 16K 16K eprom	£5.25
ACP012	EPROM ERASER	£29.95
ACP013	EPROM BLOWER Will program 2764, 27128, 27256 and 27513	£69.00
ACP033	BBC MASTER DUST COVER	£4.50
ACP034	BBC B DUST COVER	£4.50

MONITORS

COLOUR

MON002	MICROVITEC 1451 COLOUR MON MED Medium res monitor - Metal or plastic case, please state when ordering - RGB interface	£249.00
MON003	MICROVITEC 1451 A/P COL MON MED As above with audio and composite video input	£279.00
MON004	MICROVITEC 1441 MON COL HIGH Very high resolution monitor - 895 pixels - RGB interface	£449.00
MON005	TAXAN SUPER VISION 625 COL HIGH 12" super high resolution colour monitor - 4 unique text modes - Front monochrome test switch - 640 X 262 line resolution	£349.00
MON006	PHILIPS CM8833 COLOUR MONITOR 14 inch medium resolution monitor - RGB/RGB TTL	£273.86
MON007	PHILIPS CM8852 COLOUR MONITOR 14 inch medium/high resolution - RGB/RGB	£299.00

BOOKS

MIS012	BBC MASTER REFERENCE GUIDE PT1	£14.95
MIS013	BBC MASTER REFERENCE GUIDE PT2	£14.95
MIS014	VIEW MANUAL (BBC)	£10.00
MIS015	VIEWSHEET MANUAL	£10.00
MIS019	VIEWSTORE MANUAL	£10.00
MIS017	BBC USER GUIDE	£14.95
MIS024	BBC ADVANCED USER GUIDE	NEW £19.95
MIS018	ADVANCED SIDEWAYS RAM USER GUIDE	£9.95

ECONET

ACH007	ECONET KIT Upgrades for BBC B or BBC B+	£55.00
ACH008	ECONET STARTER KIT	£79.00
ACH010	ECONET MODULE Upgrade cartridge for Master 128	£43.00
ACH022	ECONET 10 STATION LEAD SET	£25.00
ACP006	PRINTER SERVER EPROM Allows BBC machine to be a printer server station	£39.00
ACH031	WINCHESTER 30MB (ACORN) with LEVEL 3 FILE SERVER	£1449.00
ACH039	FILESTORE E01 Stand alone twin floppy file server unit. Contains clock box, terminator, etc.	£819.00
ACH040	FILESTORE E20 20MB hard disk for use with Filestore E01	£709.00

SOFTWARE

Computer Concepts

ACS002	WORDWISE PLUS Mode 7 editing, preview in mode 0 - Multi document editing	£45.00
ACS003	INTER SHEET 40, 80 and 105 column mode multiple spreadsheet	£42.00
ACS004	INTER CHART Built in Epson screen dump - Supports pie, line & bar charts	£30.00
ACS005	INTER WORD 80 or 105 column word processor - Continuous documents	£42.00
ACS006	INTER BASE Compatible with all filing systems - Card index mode, contains powerful Basic like programming language	£56.00
ACS033	SPELLMASTER	£50.95

MONOCHROME

MON009	KAGA KX 117 GREEN MONITOR P31	£89.00
MON010	KAGA KX 118 GREEN MONITOR Clearly exceptional on BBC test	£99.00
MON012	PHILIPS GREEN MONITOR	£79.00

Many other monitors are in stock. We can supply, please call for prices and deliveries.

PRINTER RIBBONS

MIS005	RIBBON FOR MX FX80 & JUKI 5510	£4.50
MIS006	RIBBON FOR LX80 LX86	£4.50
MIS007	RIBBON FOR MP165	£5.00
MIS008	RIBBON FOR KAGA KP810/CANON PW1	£5.95
MIS009	RIBBON FOR EPSON FX RX/100	£7.95
MIS034	RIBBON FOR EPSON LQ800	£11.95
MIS023	RIBBON FOR CPA80	£3.50

DISC DRIVES

All Peartree Disc Drives have a two year warranty by Akhter Computers

SPECIAL OFFER

ACH026	SINGLE 40/80 DRIVE, NO PSU 400K MITSUBISHI	£109.00
ACH027	SINGLE 40/80 DRIVE inc. PSU 400K MITSUBISHI	£125.00
ACH028	DUAL 40/80 DRIVE, NO PSU 800K MITSUBISHI	£219.00
ACH029	DUAL 40/80 DRIVE, inc. PSU 800K MITSUBISHI	£249.00
ACH030	DUAL 40/80 DRIVE IN MASTER BRIDGE MITSUBISHI	£269.00
ACH032	WINCHESTER 20MB & 400K DRIVE In monitor bridge for Master - Built in fan and power supply - Other sizes for hard discs are available, please call	£766.00

ACORNSOFT

ACS012	VIEW 3.0 Industry's standard word processor - For the BBC B, B+, 6502 compatible - Including printer driver generator	£53.00
ACS013	VIEWSHEET Acornsoft standard spreadsheet	£36.00
ACS014	VIEWSTORE Complete with report generator. Data can be imported from other view products	£37.00
ACS015	VIEWSPELL Spelling checker for View with 70,000 words	£32.00
ACS016	VIEWPLOT Enables you to draw lines, pie graphs. Compatible with Viewsheet	£24.00
ACS017	VIEWINDEX Automatically creates indexes, notes, page numbers	£13.00
ACS018	VIEW PRINTER DRIVER GENERATOR Used to personalise View documents with special features	£9.00
ACS181	OVERVIEW For the MASTER series only - Includes Viewplot, Viewstore, Viewspell, Viewindex and the View Printer Driver Generator	£86.00
ACS020	ISO PASCAL Full implementation of the ISO standard	£52.00
ACS031	DOS COPY BBC/MS-DOS BBC MSDOS copies to or from many IBM MSDOS disc formats - Requires 1770 based DFS	£14.95
ACS032	CPMBEEB BBC/CPM	£14.95
ACS038	AMX MOUSE AND SUPERART	£65.00
ACS039	AMX DESK	£19.00
ACS040	AMX UTILITIES	£11.50
ACS041	AMX SUPERART	£43.00
ACS042	AMX PAGEMAKER	£43.00
ACS044	AMX DATABASE	£21.00

PRINTERS

PRT002	EPSON FX800 19 pin dot matrix - 180 CPS draft mode, 35 CPS NLQ mode - 8K buffer - Parallel interface standard - 80 column	£399.00
PRT003	EPSON FX1000 19 pin dot matrix - 200 CPS draft mode, 35 CPS NLQ mode - 8K buffer - Parallel interface standard - 136 column	£499.00
PRT004	EPSON LQ800 PRINTER 24 pin dot matrix - 180 CPS draft mode, 60 CPS NLQ mode - 7K buffer - Parallel interface standard - 80 column	£499.00
PRT005	EPSON LQ1000 PRINTER 24 pin dot matrix - 180 CPS draft mode, 60 CPS NLQ mode - 7K buffer - Parallel interface standard - 136 column	£699.00
PRT008	MP 165 PRINTER 165 CPS draft mode, 40 CPS NLQ mode - 2K buffer - Centronics interface - Built in tractor feed - Epson compatible	£199.00
PRT011	JUKI 6100 PRINTER 18 CPS daisy wheel printer - Standard ribbons - Centronics interface	£299.00
PRT021	PANASONIC KX-P1081 DOT MATRIX PRINTER Fast draft printing at 120 CPS. Excellent Near Letter Quality font at 24 CPS	£147.00
PRT023	EPSON LQ1000 TRACTOR FEED FEEDER	£50.00
PRT024	EPSON LQ1000 CUT SHEET FEEDER	£130.00

**Please Note
We have many other makes of printers in stock.
Always call for availability.

If you cannot see the item you require in our lists, please call us for availability and our usual highly competitive prices.

All Peartree products carry a year's guarantee.

All prices are exclusive of VAT.

Acorn
The choice of experience.


**PEARTREE
COMPUTERS LTD**

**BRITISH
BROADCASTING
CORPORATION
MASTER SERIES
MICROCOMPUTER**

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF

**PEARTREE
PRODUCTS**

PEP001	PEAR 1 ROM CARTRIDGE Add 32K rom to your Master	£8.95
PEP002	MR6000 MASTER CARTRIDGE Add 64K rom to your Master	£11.95
PEP003	MR7200 MASTER RAM CARTRIDGE Add 32K ram to your Master	£33.95
PEP019	MR8000 MASTER RAM CARTRIDGE Add 64K ram to your Master Battery backed up Battery life five years	£44.95
PEP023	MR4800 RAM BOARD RAM board for the BBC Model B 128K RAM Battery backed up Small, easy to fit, complete with utility software Includes write protect switch, battery included	£69.95
PEP004	MR3000 ROM BOARD Still going strong. This has proved to be a very popular mini rom board for the BBC Model B Add 4 extra rom sockets	£15.95
PEP005	MR4200 RAM BOARD Add 32K of sideways ram and 3 extra rom sockets. Includes write protect switch	£34.95

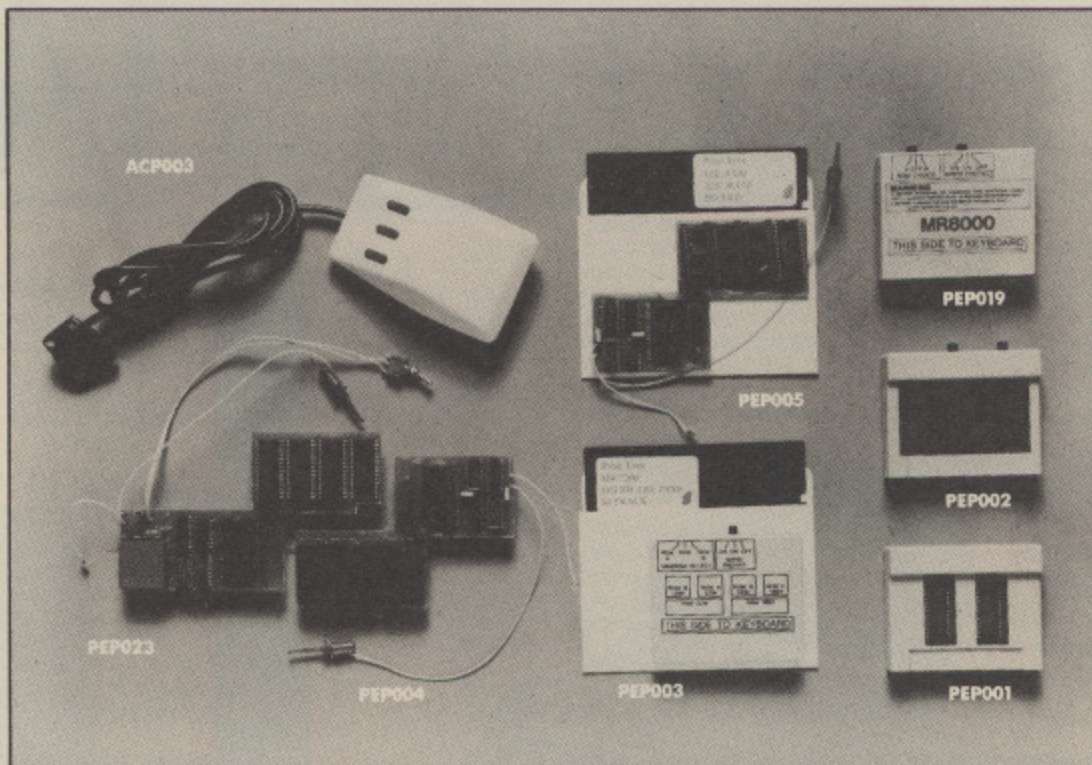

PEP010	DISCS DS/DD 5.25 96 TPI Life time guarantee Reinforced hub	£13.50
PEP011	DISCS DS/DD 3.5 Double sided Suitable for the Master Compact	£26.00

The Acorn



Music 500
SYNTHESISER

Now available from Peartree the Acorn Music 500 for the BBC, BBC+, Master 128

£29.00

excluding VAT.

only from PEARTREE

▶ ACH034

All Peartree products carry a year's guarantee.

NAVIGATOR



A NEW PROGRAM FROM PEARTREE

At last, a comprehensive FLIGHT PLANNING program for the BBC Master.

Written by a qualified pilot to assist aircrew in Flight Planning, NAVIGATOR consists of a database of over 3000 airfields, beacons and reporting points ranging from Norway to Cyprus to Gibraltar, and a suite of linked Basic programs.


Having selected a route, simply enter the waypoints, heights and speeds required and the winds at height. NAVIGATOR computes and displays for each leg of the route: LATITUDE and LONGITUDE, 2 RADIO-AID FIXES, TRACK, HEADING, DISTANCE, TRUE AIRSPEED, GROUND SPEED, STILL AIR TIME, PREDICTED LEG TIME and TOTAL ELAPSED TIME.



NAVIGATOR is written in BBC Basic 4 and runs on the Acorn Master 128 and Master Compact. It is mouse-driven throughout.

If you fly aircraft for business or pleasure, let NAVIGATOR take the pain out of Flight Planning!

PEP030	NAVIGATOR Software and mouse	£129.00
PEP031	NAVIGATOR Software only for mouse owners	£99.00

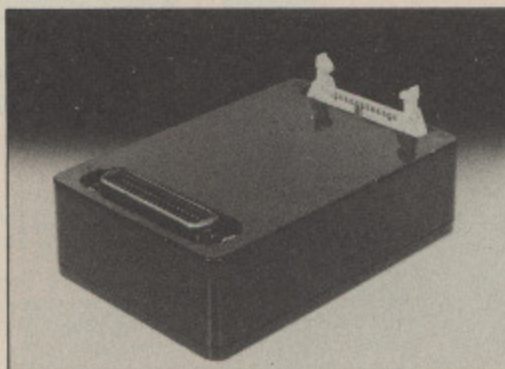

**NEW • NEW • NEW
32k PRINTER BUFFER**

Battery backed up. No soldering. No plugs required. All you need is an extra cable to operate this simple device. Software included on ROM on main PCB board.
Price **£44.95**

We accept Barclaycard/Visa/Access/Mastercard/postal orders or cheques. We accept government and educational orders. Leasing available, please apply for written details. You may purchase any of the items listed, by cheque made payable to PEARTREE COMPUTERS LTD. All you have to do is list your requirements on a sheet of paper, post it to us quoting ref, and we will despatch your goods within 7 days, whenever possible, stock permitting. Please add the following amounts for postage and packing, and insurance:

Items below £10.00	add £1.50	Items below £100.00	add £3.50
Items below £50.00	add £2.50	Items over £100.00	add £10.00

Independent courier for items over £100.00. All prices exclude VAT. Access/Barclaycard holders—call us on our new special line: (0480) 50595

Prices are correct at time of going to press. Peartree Computers reserves the right to change prices without prior notice.

Computers and Upgrades

Archimedes 305	£699.00 (a)
Archimedes 305 Mono System	£749.00 (a)
Archimedes 305 Colour System	£899.00 (a)
Archimedes 310	£775.00 (a)
Archimedes 310 Mono System	£825.00 (a)
Archimedes 310 Colour System	£975.00 (a)
Archimedes 310M	£835.00 (a)
Archimedes 310M Mono System	£885.00 (a)
Archimedes 310M Colour System	£1035.00 (a)
Archimedes 410	£1399.00 (a)
Archimedes 410 Mono System	£1449.00 (a)
Archimedes 410 Colour System	£1599.00 (a)
Archimedes 440	£2299.00 (a)
Archimedes 440 Mono System	£2349.00 (a)
Archimedes 440 Colour System	£2499.00 (a)
Archimedes poduke backplane	£39.00 (d)
Archimedes ROM poduke	£59.00 (d)
Archimedes I/O poduke	£79.00 (d)
Archimedes Midi add-on to I/O poduke	£29.00 (e)
Master 128	£369.00 (a)
Master Compact	From £310.00 (a)
Master Turbo Upgrade	£99.00 (c)
Master 512 Upgrade	£189.00 (c)
Master 128 Eprom Cartridge	£11.00 (c)
Master 128 Dust Cover	£4.50 (e)
Compact RS 232 Interface	£26.00 (c)
Compact TV Modulator	£26.00 (e)
1770 Disc Interface	£41.00 (d)
ADFS ROM (B+ or B with 1770)	£25.00 (e)
B+64 64K Upgrade	£30.00 (d)
Trade in your old Model B against a new Master 128, Master Compact or Archimedes	
Cambridge Computers Z88	£244.00 (a)
Z88 PSU	£8.65 (d)
128K RAM	£43.00 (e)
128K Eprom	£43.00 (e)

Printers (Dot Matrix)

Epson LX800 80col/150cps + 22cps NLQ	£229.00 (a)
Citizen 120D 80col/120cps + 25cps NLQ	£150.00 (a)
Citizen MSP10E 80col/160cps + 40cps NLQ	£225.00 (a)
Citizen MSP15E 136col/160cps + 40cps NLQ	£259.00 (a)
Citizen MSP40 80col/200cps + 50cps NLQ	£300.00 (a)
Citizen MSP45 136col/200cps + 50cps NLQ	£400.00 (a)
Citizen MSP50 80col/250cps + 60cps NLQ	£400.00 (a)
Citizen MSP55 136col/250cps + 60cps NLQ	£520.00 (a)
Citizen HQP40 24pin 80col/200cps + 60cps LQ	£379.00 (a)
Citizen HQP45 24pin 136col/200cps + 60cps LQ	£454.00 (a)
MP 165 80col/165cps + 38cps NLQ	£186.00 (a)
MP 200 80col/200cps + 40cps NLQ	£249.00 (a)
MP 201 136col/200cps + 40cps NLQ	£274.00 (a)
Star LC10 120cps + 30cps NLQ	£174.00 (a)

Printers (Daisy Wheel)

Juki 610C 110col 20cps	£280.00 (a)
Citizen Premier 35 132col 35cps	£554.00 (a)
MP26 - 26cps Diablo 630 compatible	£234.00 (a)
MP40 - 40cps Diablo 630 compatible	£319.00 (a)

2 Year Warranty on Citizen, Juki and MP Printers

Printers (Laser)

New Citizen Laser Overture 110 10 pages/min 250 sheet cassette dual interface	£1600.00 (a)
---	--------------

With one year on site maintenance

AMX Mouse and Software

AmX Mouse + Super Art	£60.00 (d)
AMX Pagemaker	£37.00 (d)
Extra Extra	£21.00 (e)
Mouse Mat	£4.34 (e)

Disc Drives

Mitsubishi Drives	
Single DS 40/80T	£96.00 (a)
Single DS 40/80T inc PSU	£111.00 (a)
Dual DS 40/80T	£189.00 (a)
Dual DS 40/80T inc PSU	£209.00 (a)
Dual DS 40/80T inc PSU & Plinth	£214.00 (a)
20Mb Winchester	£449.00 (a)
Combination 3.5 5.25 Winchester available	Phone for details

2 year Warranty on all Drives



COMPUTING

BUSINESS SYSTEMS • HARDWARE
SOFTWARE • VIDEO SYSTEMS
MEDIA SUPPLIES
OFFICIAL DOMESDAY DEALER



The choice of experience.

ACORN APPROVED DEALER

Phone 0602 787923

Discs

Discs 5.25" (Boxed in 10's Lifetime guarantee)	
3M744 SS/DD 48TPI	£11.00 (d)
3M745 DS/DD 48TPI	£13.00 (d)
3M747 DS/DD 96TPI	£15.00 (d)
Add £1 for plastic library case	
B & S Label 96TPI in see through LIB. Case DS/DD	£13.00 (d)
Disc Cleaning Kit (state 5.25" or 3.5")	£9.00 (d)
3.5"	
3M 35SS SS/DD (Box of 10)	£21.00 (d)
3M 35DS DS/DD (Box of 10)	£29.00 (d)
B & S Label DS/DD	£19.00 (d)

Lockable Anti-Static 5.25" Storage Cases

50 Disc Capacity	£8.00 (d)
100 Disc Capacity	£10.00 (d)

Monitors

All Monitors include BBC Lead	
Philips Range of high resolution Mono Monitors with Audio Input Green, Amber or Paper White.	
BM 7502 (Green)	£69.00 (a)
BM 7522 (Amber)	£74.00 (a)
BM 7442 (Paper White)	£74.00 (a)
New Philips TV/Monitor, 15" Flat Screen, RGB, Comp Video, 20 Channel TV	£220.00 (a)
Philips Colour Monitor RGB, Composite Video, Audio in Linear RGB Green Screen SwitchableBBC/IBM Compatible CM8833	
	£220.00 (a)
Philips Multisync CM8873 CGA/EGA/PGA Compatible	
	£520.00 (a)
Ideal for use with Acorn Archimedes computers.	
Microvitec	
1431 (Metal or Plastic Case please specify) Std. Res.	£179.00 (a)
1451 (Metal or Plastic Case please specify) Med Res.	£224.00 (a)
1441 (Metal or Plastic Case please specify) High Res.	£375.00 (a)
1431 AP Metal Case RGB and CV/Audio Std. Res.	£209.00 (a)
1451 AP Metal Case only RGB and CB Audio Med. Res.	£259.00 (a)
TILT and SWIVEL Stands for Plastic Case Only	£19.00 (a)
Plinths	
BBC B Single	£11.00 (c)
BBC Master Single	£12.00 (c)
BBC Master with Shelf	£22.00 (b)

UK Customers: Please add 15% VAT to all prices (including carriage). Government and educational establishments official orders welcomed. When ordering please enclose a cheque or postal order for the appropriate amount. UK Carriage Rates (a) £8.00 - courier insured delivery (b) £3.50 (c) £2.50 (d) £1.50 (e) £1.00. All prices are correct at time of going to press. All offers are subject to availability, all prices are subject to change without prior notification and are available on request. Current price list is available on request. Goods normally despatched on receipt of order.

B & S COMPUTING (NOTT'M) LTD
THE LENTON BUSINESS CENTRE
LENTON BOULEVARD
NOTTINGHAM NG7 2BY
PHONE: 0602 787923

ROM Boards

ATPL Sideways (state B or B+)	£34.00 (d)
Viglen ROM System (B series)	£11.25 (d)
Viglen ROM System (Master 128)	£12.00 (d)
Viglen ROM System Compact	£12.00 (d)
Viglen Spare Cartridges	£2.50 (e)

Printer Ribbons and Accessories

Epson LX 86 (Compat)	£2.89 (e)
Epson MX 80/RX 80/FX80/FX85 (Compat)	£2.50 (e)
Juki 5510/Citizen MSP 20 (Compat)	£2.50 (e)
Citizen 120D/LSP10	£3.75 (e)
Taxan 810/Canon (Compat)	£3.75 (e)
Juki 6100 Multifit	£2.30 (e)
Tally MT85 Fabric	£5.00 (e)
Tally MT86 Carbon	£7.00 (e)
Printer lead 1.5m B/B+/M128/ELK +1	£6.00 (e)
Printer lead 1.5m Compact	£8.00 (e)
Printer lead 2m IBM or Compatible	£10.00 (d)
80col Printer Stand	£11.00 (c)
Universal Printer Stand	£15.00 (d)
Printer Switch Box 2 Way "T" Switch	£39.00 (c)

Modems

All Modems inc BBC Lead	
Miracle WS2000	£95.00 (c)
Miracle WS4000 Hayes compatible	£144.00 (c)
Pace Nightingale + Commstar II	£94.00 (c)
Nightingale Auto Dial Auto Answer Board + SW	£52.00 (d)
Pace Commstar II ROM	£28.00 (e)
Pace Linnet	£124.00 (c)
NB BAPT APPROVAL ON MODEMS ONLY	
50ft. Telephone Extn. Cable on Wind up Reel	£9.50 (d)

Software

Acorn Soft			
Micro Prolog	£50.00 (d)	ISO Pascal	£42.00 (d)
Logo	£44.00 (d)	BCPL	£39.00 (d)
Forth Basic	£14.00 (e)	Comal	£32.00 (d)
Lisp	£33.00 (e)	Hi View	£37.00 (d)
View Professional	£75.00 (c)	View 3.0	£39.00 (d)
Viewsheet	£37.00 (d)	View Store	£37.00 (d)
View Spell (80T only)	£29.00 (d)	View Plot	£21.00 (e)
View Index	£10.00 (e)	Overview	£69.00 (c)
View Printer Driver		Disc	£8.00 (e)
Gen. Tape	£7.00 (e)		
Computer Concepts			
Interword	£39.00 (d)	Inter Sheet	£39.00 (d)
Interchart	£26.00 (d)	Interbase	£49.00 (d)
Mega 3	£75.00 (c)	Spellmaster	£42.00 (d)
Wordwise	£75.00 (c)	Wordwise +	£37.00 (d)
Mirrorsoft			
Fleet Street Editor	£31.00 (d)	Fonts and Graphics	£11.75 (e)
Claree			
Fontwise +	£16.00 (e)	Replica III	£11.00 (e)
VINE MICRO REPLAY (State M/C and Disc Interface)			
NB It is essential to state machine and 40/80T when ordering software			

Books (No VAT on Books)

Master Ref. Manuals Pt1	£14.00 (d)	Pt2	£14.00 (d)
Advanced Master Ref. Manual (Bray & Dickens)			£19.95
Lisp	£8.00 (e)	Forth	£8.00 (e)
BCPL	£14.00 (d)	View Guide	£6.00 (e)
View 3	£9.00 (e)	View Sheet	£9.00 (e)
View Store			£9.00 (e)
Archimedes Ref. Manual			£29.95 (d)
Arm Assembly Language Manual			£12.95 (e)
Mastering View, Viewsheet and Viewstore			£12.95 (e)
Understanding Interword			£6.50 (e)
View A Dabhand Guide			£12.95 (e)
Z88 Computing			£9.95 (e)

Fanfold Paper and Labels

2000 x 1 Part 60gm 11 x 9.5" Micro Perf.	£12.00 (c)
1000 x 1 Part 85gm 11 x 9.5" Micro Perf.	£9.00 (c)
1000 x 1 Part 90gm "Perfect" A4 Micro Perf	£12.00 (b)
1000 89mm x 36mm Labels	£4.00 (d)
1000 89mm x 49mm Labels	£6.00 (d)
1000 102mm x 36mm Labels	£5.00 (d)

Please state Single or Twin Row, when ordering Labels



CJEmicros

THE ACORN SPECIALISTS

The widest range of Archimedes Hardware & Software anywhere!

ARCHIMEDES

External Drive Interface

Fully buffered with link options. THE BEST. £30.00. N.B. not all drives are Archimedes compatible

Drive Swap Switch

For above makes external drive '0', internal drive '1'. Ideal for PC Emulator as 5.25" drive becomes A:Internal B: £8.00.

Drive Select Translation Cable

When used with above, interface links in external drive can stay set to '0', saves hassle when moving a drive from a Beeb. £9.00.


DFS Reader

This program will transfer the files on a DFS disk globally or selectively to an Archimedes disk quickly and simply. £15.00.

Monitor Switch Box

Archie/BBC. Plug both a BBC and an Archimedes into an Archimedes colour monitor. £10.00.

Archimedes <-> BBC RS423 link kit including file transfer software. £15.00.

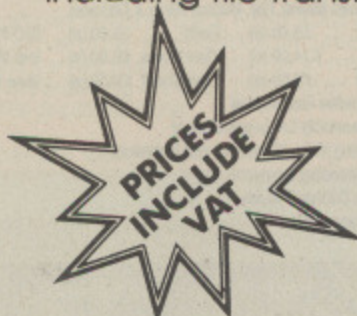

P&P £1 or as quoted
TRADE & EXPORT
ORDERS WELCOME
please enquire for
delivery cost.
Phone/Credit Card
and Official
Orders welcome.

C.J.E. MICRO'S (Dept. MU), 78 Brighton Road, Worthing, W. Sussex BN11 2 EN
(0903) 213361 (3 lines)

FONTAID

'FONTAID' NLQ Font designer for CANON/TAXAN & STAR NL10/LC10 (Archie version available).
Ring for a leaflet

SOFTWARE

'Multi Font NLQ' for most printers (SWR workspace version now available)
'INFORM' Sideways Ram information system!
Ring for a leaflet

PRINTERS & MONITORS

PRINTERS

Star/Canon/Panasonic/Juki

MONITORS

Philips/Microvitec

Ring for best prices

Archimedes

Acorn 
The choice of experience.

Special offers on ARCHIMEDES & MASTERS.
Ring for details.
Officially approved ACORN/ARCHIMEDES Dealer & Service Centre.
Come to our shop for a demonstration.



MICROMAN Computers

PASTURE LANE FARM,
PASTURE LANE, RAINFORD,
ST. HELENS, MERSEYSIDE, WA11 8PU

PHONE 074488 3667

SHOWROOM

SHOWROOM OPENING
9-6 MONDAY TO FRIDAY
9-1 SATURDAY



MAIL ORDER

PHONE 074488 5242

We accept both Access and Visa credit cards. Simply telephone your order, giving card number, expiry date, name and address, or send your order with cheque or postal order to the address opposite.

DELIVERY CHARGES INCLUDING VAT

Computers/Printers/Drives:
Next day £8.00, Trackback £4.00
Small Items: £1.00



ACORN DEALER : ECONET : SERVICE CENTRE

Archimedes

	Ex VAT	Inc VAT
ARCHIMEDES 300 SERIES		
Archimedes 310 Base	775.00	891.25
Archimedes 310 Monochrome	825.00	948.75
Archimedes 310 Colour	975.00	1121.25
Archimedes 310M Base	835.00	960.25
Archimedes 310M Monochrome	885.00	1017.75
Archimedes 310M Colour	1035.00	1190.25
ARCHIMEDES 440		
Archimedes 440 Base	2299.00	2643.85
Archimedes 440 Monochrome	2349.00	2701.35
Archimedes 440 Colour	2499.00	2873.85
ARTISAN SUPPORT DISC		
Include colour dumps for JX80, Integrex, EX800 & NEW LC10 Colour	17.35	19.95
NEW STAR LC10 COLOUR PRINTER		
Including free lead	216.52	249.00
ARCHIMEDES UPGRADES		
0.5MB Ram	89.00	102.35
Floppy Disc Drive	125.00	143.75
20MB Hard Disc & Podule	499.00	573.85
Podule Backplane	39.00	44.85
ROM Podule	59.00	67.85
I/O Podule	79.00	90.85
ARCHIMEDES SOFTWARE		
Ansi C	99.00	113.85
ISO-Pascal	99.00	113.85
MSDOS Emulation	99.00	113.85
Logistix	99.00	113.85
Minerva Deltabase	26.04	29.95
Minerva System Delta Plus	60.83	69.95
Clares Artisan	34.74	39.95
Clares Graphic Writer	26.04	29.95
Clares Toolkit Module	34.74	39.95
BBC MASTER SERIES		
Master 128	379.00	435.85
Master Turbo Module	108.70	125.00

MASTER 512 UPGRADE SPECIAL OFFER £199.00

Price includes VAT.

This offer includes: FREE MICROMAN 512 DISC UTILITIES SOFTWARE WORTH £12.95.

	Ex VAT	Inc VAT
BBC MASTER COMPACT SERIES:		
Master Compact	349.00	401.35
Master Compact + TV Modulator	363.00	417.45
Master Compact + Green Monitor	399.00	458.85
Master Compact + Colour Monitor	549.00	631.35
RS232 Kit	26.00	29.90
Additional Floppy Disc Drive	99.00	113.85
Pal TV Adaptor	26.00	29.90
ECONET NETWORKS:		
Archimedes/Master Econet Module	43.47	49.99
Filestore E01	828.00	952.20
Filestore E20	721.00	829.15

AHKTER MITSUBUSHI DRIVE

Single 5.25" 400K 40/80T	99.96	114.95
Single 5.25" 400K 40/80T + PSU	113.00	129.95
Dual 5.25" 800K 40/80T	191.26	219.95
Dual 5.25" 800K 40/80T + PSU	217.35	249.95
Single 3.5" 400K	86.91	99.95
Single 3.5" 400K + PSU	104.30	119.95

BBC MONITORS:		
Microvitec 1431 Std/Metal	119.13	229.00
Microvitec 1451 Med/Metal	242.61	276.00
Philips CM8833 Med/RGB/CV	260.00	287.50
Philips Green 7502	73.91	85.00
Philips Amber 7522	77.39	89.00
BBC DISC INTERFACES/UPGRADES		
Acorn 1770 Disc Interface	43.44	49.95
Acorn ADFS ROM	26.08	29.99
BBC B CO-PROCESSOR ADAPTERS:		
Acorn Co-Pro Adapter	75.00	86.25
Watford Co-Pro Adapter	35.00	40.25
BBC B ROM BOARDS:		
Watford Solderless ROM Board	32.00	36.80
Watford Battery Backup	3.00	3.45
Aries B12 Sideways ROM Board	40.00	46.00
Aries B12c Adapter	5.00	5.75
ATPL Sideways ROM Board	38.00	43.70
BBC B SIDWAYS ROM/RAM EXPANSION		
Watford 16K Sideways RAM Module	29.00	33.35
Watford ROM/RAM Card + 32K	39.00	44.85
Watford ROM/RAM Card 64K	52.00	59.80
Watford ROM/RAM Card + 128K	80.00	92.00
Watford Sideways ZIF Socket	15.00	17.25
BBC B SHADOW BOARDS:		
Watford 32K Shadow RAM Board	59.00	67.85
Aries B32 RAM Extension Board	80.00	92.00
BBC EPROM PROGRAMMERS/ERASERS		
Control Telemetry EPROM Prog	95.00	109.25
Multiprom Programmer	39.09	44.95
Uviprogram & Multiprom programmers require either SWR or ROM software listed below.		
Uviprogram ROM Software	4.35	5.00
Uviprogram SWR Disc Software	1.74	2.00
Uviprogram EPROM Eraser + Timer	22.57	25.95
EPROMS/RAM CHIPS:		
Eprons 2764 8K		P.O.A.
Eprons 27128 16K		P.O.A.
Eprons 27256 (12.5v)	5.00	5.75
Eprons 27512	9.00	10.35
RAM 6264LP-15 8K	3.00	3.45
BBC MODEMS:		
Pace Linnet + Commstar II	139.00	159.85
Pace Nightingale + Commstar II	86.09	99.00
Watford Apollo Modem	84.00	96.60
BBC SPECIAL KEYBOARDS:		
Concept Keyboard A4	109.50	125.93
Concept Keyboard A3	139.50	160.43
BBC VIDEO DIGITISERS:		
Watford BEEB Video Digitiser	109.00	125.35
Watford Magazine Maker	129.00	148.35
BBC MOUSE/TRACKERBALL PRODUCTS		
Watford Quest Mouse	30.00	34.50
Watford Quest Mouse + Paint	59.00	67.85
AMX Mouse + Super Art (Mk III)	69.52	79.95
AMX Mouse Mat	4.35	5.00
AMX Pagemaker	43.44	49.95
AMX Extra Extra (Pagemaker)	21.70	24.95
AMX Super Art ROM: BBC B	43.44	49.95
AMX Super Art: Master	43.44	49.95
AMX MAX	17.35	19.95
Fleet Street Editor	34.74	39.95
Trackerball RB2 + ICON Soft	59.00	67.85
Trackerball + Pointer (Master)	59.00	67.85
BBC MASTER CONSOLE		
Viglen Console	43.44	49.95
Viglen Master Console	52.13	59.95

	Ex VAT	Inc VAT
BBC CAD SYSTEMS:		
Pineapple Diagram II	55.00	63.25
Pineapple PCB Designer	85.00	97.75
AMX Design	60.83	69.95
PRINTERS		

NEW STAR LC10

INCLUDING CENTRONICS INTERFACE + 2M BBC LEAD	
Ex VAT	Inc VAT
£173.04	£199.00

Star NX15 Wide Carriage	339.00	389.85
-------------------------	--------	--------

PANASONIC KXP1081

Printer + Free BBC Lead	
Ex VAT	Inc VAT
£155.65	£179.00

Epson LX800	225.22	259.00
Juki 6100 Daisywheel	299.00	343.85
Panasonic Serial Interface	41.00	47.15
Star NL10 Sheet Feeder	55.00	63.25
LX800 Sheet Feeder	TBA	
Print Sharer 2 Way Switch	29.00	33.35

PLOTTERS:		
Roland DXY880A A3 Plotter	694.78	799.00
Roland DXY980A A3 Plotter	999.00	1148.85
We are a Roland Main Dealer and stock the complete range of plotter, pens and paper.		

BBC WORDPROCESSING:		
Mega 3 Rom - NEW	85.00	97.75
View Professional	86.91	99.95
Interword ROM	42.61	49.00
Wordwise Plus ROM	42.61	49.00
View 3.0 ROM	45.22	52.00
Spellmaster	51.31	59.00

BBC DATABASE & SPREADSHEETS		
Master Overview	86.00	98.90
Interbase ROM	60.00	69.00
Viewstore ROM	45.22	52.00
Intersheet ROM	43.44	49.95
Interchart ROM	29.52	33.95
Viewsheets ROM	45.22	52.00

BBC LANGUAGES:		
Master C	78.00	89.70
BCPL ROM	52.00	59.80
ISO Pascal ROM	52.13	59.95
ISO Pascal Stand Alone Gen	30.00	34.50
Comal ROM	43.35	49.85
Acorn LOGO ROM	60.00	69.00
Logotron LOGO ROM	60.00	69.00
Micro-Prolog ROM	69.52	79.95

BBC UTILITIES		
Master Termulator	34.74	39.95
System ADE + Master Version	49.00	56.35
Advanced Disc Investigator	25.00	28.75
Advanced Disc Toolkit	30.00	34.50
Vine Replay ROM's	25.65	29.50
Vine Master Replay	30.43	35.00

We stock a large range of utility software by ACORN, CLARES, COMPUTER CONCEPTS, WATFORD etc

OPUS PC & AMSTRAD 1640

Ring or call for full price List

GOVERNMENT, NHS AND EDUCATIONAL ORDERS ACCEPTED

Why buy a new machine when you can upgrade? RING SOUTHEND (0702) 354674

1770 DFS

1770 Disc Interface:

The new Acorn Disc Filing Systems DFS and ADFS require both the WD1770 chip. The Solidisk 1770 DDFS (Dual Density Disc Filing System) is ideal because it is:

- inexpensive.
- totally compatible with Acorn ROMs, to the hardware level, and with the Acorn 80186 coprocessor.
- easy to install by expert and novice alike. Only 4 components to be plugged into the motherboard.
- the direct replacement for the standard Acorn upgrade since 1985.




Price: £35.00 inclusive of VAT, p&p £2.00.

1770 + 8271 DFDC:

If your BBC already has an 8271 DFS installed, don't throw it away to use the new DFS and ADFS! Our 8271+1770 DFDC (Dual Floppy Disc Controller) is what you need. Simply remove the 8271 chip, insert the DFDC board and replace the 8271 in the empty socket provided. The DFDC offers:

- All the advantages of the new 1770 chip.
- 100% compatibility with all existing software.
- Compatibility with ALL Acorn ROMs to the hardware level and with the Acorn 80186.

Price: £40.00 inclusive of VAT, p&p £2.00.

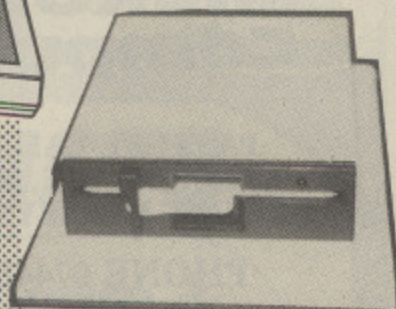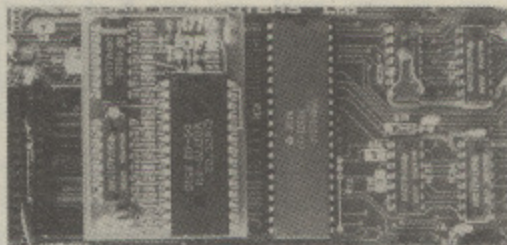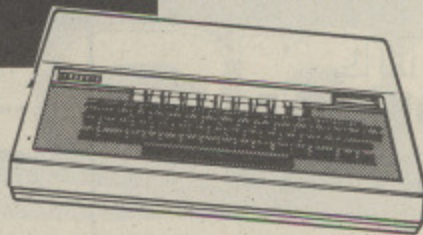

DOUBLE-SIDED 5 1/4" DISC DRIVE

This is a superb 80 track, double-sided, dual density, lever type and very fast disc drive. Unformatted capacity: one Megabyte. 40/80 track manual switch optional as most Acorn and Solidisk DFS have software switch. Supplied with data and power lead (please specify your computer). Price £119.00 inc VAT. 40/80 track manual switch if required: £2.00 inc VAT.

DFS ROM

DFS ROMS:

Solidisk own DFS 2.2 and ADFS 2.1 ROMs have a superset of utilities and commands. They are also compatible with Acorn's latest DFS ROMs. Data sheets on these ROMs are available on request.

DFS Version 2.2 (16k) ROM:

This will work with both the 8271 and the 1770 chips. It allows you to use both single (standard) and double density discs (with the 1770), yielding 60% increase of storage at no extra cost. It also offers such advanced features as unlimited number of filenames (Acorn 31), filesize up to 512k, read after write error correction and conditional double track stepping. It has a second only to Acorn's — 8271 emulation when used with the 1770 chip to overcome software protection. It also has many built-in utilities while others offer as extras such as disc formatter and verifier, disc sector editor, recover and restore files etc. Price: £15.00 inc. — £10.00 if purchased together with the 1770 DFS (or DFDC).

ADFS and DFS Version 2.1 ROM set (32k, 2 chips) for the 1770 chip:

This is probably the best Disc Filing System ever made for the BBC, providing for single and double density DFS and ADFS. It has all the advanced features of the DFS 2.2 ROM plus a superset of commands for ADFS (Advanced Disc Filing system such as in use on the Master, Compact and Archimedes). Lots of articles have been published about the advantages of ADFS over DFS but little is known about advanced features of the Solidisk version versus the standard BBC (Acorn) version such as password protection, user defined number of files, automatic disc format detection, disc formatter/verifier and file transfer utilities which make the ADFS super-friendly. Furthermore, there is no copy-protection problem with the ADFS. Price: £30.00 inc. or £20.00 if purchased together with the 1770DFS (or DFDC).

MEMORY

The Multifunction Twomeg 128k:


This new style TWOMEG128K is the best ever solution for memory upgrades. It combines a ROM expansion board, a Sideways RAM board, a Shadow RAM board, a Printer Buffer board in a single, sleek unit offering:

- 8 ROM sockets (4 on the TWOMEG board, plus 4 on the motherboard).
- 8 Sideways RAM banks (4-7 and C-F).
- 4 of the RAM banks (C-F) can be used as two Shadow RAM banks (and two 8k Sideways).
- Any Sideways bank can be used as a printer buffer.
- Write-protect switch for Sideways RAM software.
- in the included software: MENU, MANAGER, PRINTER BUFFER.
- Ramdisk is available with Solidisk DFS and ADFS ROMs.

Easy instant installation: simply remove the 6502 CPU, drop in the board and push 3 wires onto the middle pins of S20-22. ABSOLUTELY NO CLIPS, NO CUTTING, OR SOLDERING REQUIRED.

Price: £60.00 inc. software disc and VAT, p&p £2.00.

Only £60.00 inc.!

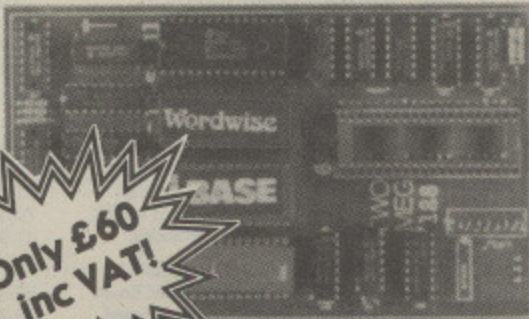

Only £60
inc VAT!

TWIN DOUBLE-SIDED 5 1/4" DISC DRIVES

Complete with bridge unit, suitable for both BBC and Master 128K. Price £238.00 inc VAT.



MASTERPLAN

This is the best way to upgrade your present computer system. It's quick and with a minimum of fuss. We will accept not only your computer but also your Acorn or Solidisk add-ons in part exchange. Up to date quotations are given over the phone with written confirmation sent by post, valid up to 30 days with no obligation from your side. You can choose any computer system, not just another Acorn machine. Solidisk can offer you the best deals on just about any other makes and our own AT-compatible system.


Example: One Megabyte RAM ARC: £731.00 + VAT
(with Acorn Colour Monitor: £913.50 + VAT, with Philips CM8833: £930 + VAT).



Compact



Master

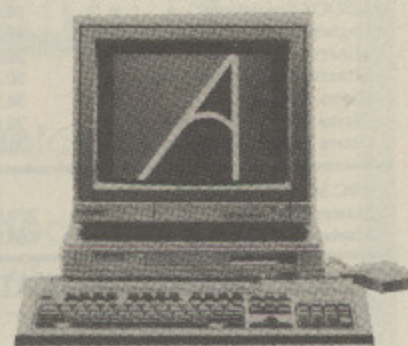

Arc

FOR COMPETITIVE QUOTES: RING !!

IBM COMPATIBILITY

To order or for further information, please send your name and address to:

Solidisk Technology
17 Sweyne
Avenue
Southend-on-Sea
Essex
SS2 6JQ


PC500 and PC PLUS:

PC compatibility has never been cheaper or easier with the PC500 and PC Plus. They can be left plugged into the TUBE socket. An IN/OUT switch at the rear turns the unit on/off. The PC500: basic Acorn 80186 (10MHz) in a case, 512k of RAM, upgradable to 1MB, mouse, DOS Plus and GEM. Runs most PC software (list available on request). Price: £239.00 inc. The PC PLUS: same as PC500 but with one Megabyte of RAM. Without case: £327.00 inc. With case: £339.00 inc. PLUS-upgrade: add 512K of RAM to your 80186. Work carried out in our workshop. Price: £107.00 inc.

Solidisk 15MHz — AT Compatible:

Intel 16/32 bit 80286 processor, 8, 10, 15 MHz switchable clock. Enhanced 102 key-keyboard, 8 expansion slots. Up to 3.5MB of RAM (just add RAM chips), 640k split. GENOA super EGA display card (640 x 480 EGA, CGA and MDA, up to 5 times faster than standard EGA). Serial and parallel interface, battery backed Real Time Clock. AT hard disc and floppy disc controller. Loudspeaker, 150 Watts power supply unit. DOS 3.2, manuals. Up to 9 times XT speed. Hundreds of add-on cards, Networks, Unix, Xenix, Windows and OS/2 etc. From £699.00 + VAT. Choice of disc drives and monitor.

Official bodies and trade welcome. Education volume discount available.

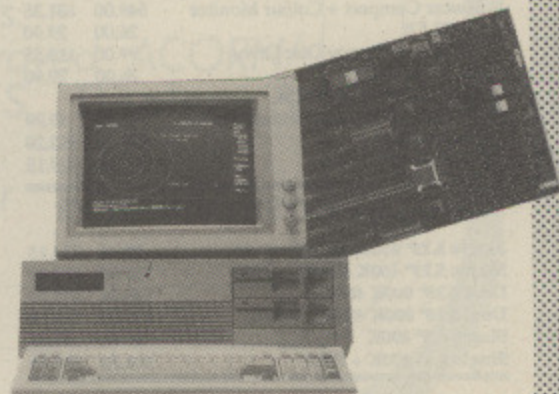

SOLIDISK — WHERE TECHNOLOGY MATTERS


Teletext (and TV) Adapter

Compatible with Archimedes, BBC, Master 128K and Compact.



£79.95
Including p&p and VAT
Cash on delivery at no extra charge.
Money back guarantee if not fully satisfied.

- professionally built and tested.
- mains powered. On/Off switch.
- TV picture and sound outputs for Philips monitors.
- connects to the user port on BBC and Master 128K.
- connects to the joystick port on the Compact.
- connects to the Centronics port on the Archimedes.
- downloads free software from BBC2, manual or automatic.
- downloads pre-selected pages (eg share prices, news, TV programs etc).
- also works on other computers such as ST, A500, PC1512 (new lead and disc required).
- stylish two tone (brown and beige) case.
- supplied with leads, software disc and manual.
- full 12-months guarantee.

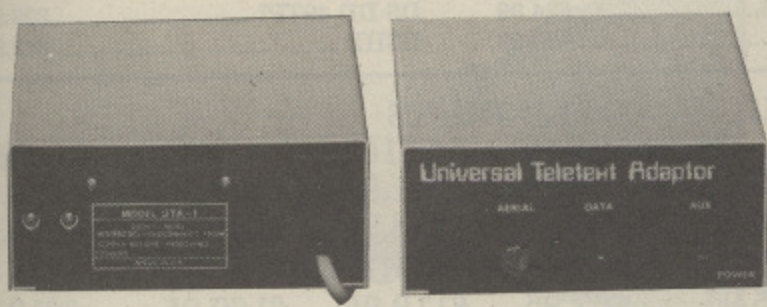

**PHONE SOUTHEND (0702) 354674 OR 335511
 FOR IMMEDIATE DELIVERY**

ACCESS/VISA, trade and government orders welcome.
 Volume and education discount available.

Send to:
**TELETEXT SPECIAL OFFER
 SOLIDISK TECHNOLOGY LTD.
 17 SWEYNE AVENUE, SOUTHEND-ON-SEA
 ESSEX SS2 6JQ**

HOMEWORK • REVISION • TUTORIALS

Maths Exam?

DIFFERENTIATION &
 INDEFINITE INTEGRALS:-

**SOLUTIONS
 ON SCREEN!**



Watch your problems transformed
 mathematically into worked examples with
'SYMBOLIC CALCULUS'

In a radical departure from conventional software
 we offer:-

- STEP BY STEP solutions
- EXPLANATIONS at every step
- Take problems from ANY book or paper
- Superb colour highlighting for clarity
- Product, Quotient & Chain rules
- Integration by parts
- Integration by substitutions
- Integration of powers of SIN and COS
- e, Logs, SIN, ARCSIN, SINH, ARCSINH etc.
- Choice of variables
- Editor with error trapping
- Control over the solution process

Symbolic Calculus is a powerful string handling
 program linked to a mathematical knowledge
 base.

Problems can range from the very complex to the
 deceptively simple.

If one technique fails to solve the problem,
 Symbolic Calculus will start again applying a
 different method and so on until solved

Learn the BEST way - by example.

Maths Workshop

DEPT. MU,
 95 South Avenue,
 Worksop, Notts.
 S80 2RE
 Tel.: 0909 500599

Please send me SYMBOLIC CALCULUS on
 cassette (£15.95)/40T disk (£16.95)/80T disk (£16.95).
 Please specify computer i.e. BBC B/B+/Master 128
 (Model B owners state Basic 1/Basic 2)
 I enclose a cheque/PO payable to
MATHS WORKSHOP

Name

Address

.....

.....

MU4

NEW LOW PRICES!

All Disks are sent by Trackback or Courier Service at no extra cost!

	10	25	50	100	150	250
5.25" Bulk Packed-Top Quality Single sided 48 T.P.I.	£5.49	£10.50	£18.50	£32.50	£41.50	£61.50
Single sided 96 T.P.I.	£5.95	£10.75	£19.00	£33.50	£43.00	£63.00
Double sided 48 T.P.I.	£5.95	£11.00	£19.50	£34.50	£45.00	£66.00
Double sided 96 T.P.I.	£6.95	£11.50	£20.50	£36.00	£46.50	£69.50
Double sided coloured 96 T.P.I.	£7.95	£13.75	£25.75	£48.50	£67.50	£99.75
Double sided reversible 96 T.P.I.	£7.95	£15.00	£28.50	£50.50	£65.50	£102.50
Coloured & reversible 48 T.P.I.	£8.95	£17.25	£32.75	£63.25	£86.25	£129.75
Coloured & reversible 96 T.P.I.	£9.95	£18.75	£34.50	£65.50	£94.75	£143.75

Packs of 10 5.25" disks come with free plastic library case (worth £1.49!)


Coloured disks come in five colours (red, blue, white, yellow, green)

Reversible disks have two index holes and two notches!

Coloured and reversible disks come in five colours and have two holes and notches

All Centec disks are packed with a protective jacket (envelope) and come with a full user set, including a label and a write protect tab. The disks are manufactured to top international standards and have a hub ring for added protection. All disks carry our no quibble replacement guarantee and are certified 100% error free.

PROFESSIONAL PRINTER STAND



This new printer stand is very space efficient as it takes hardly any more room than your printer. Due to the unique positioning of the paper guide mechanism and refeed compartments that is one above the other, the desk space is effectively halved. The space saving design allows easy access to the paper from both sides, the special dial controlled paper feed system with adjustable deflector plates ensures smooth paper flow and automatic refeeding.

80 col.£29.95
132 col.£34.95

PC-AT HIGH DENSITY DISKS

Made by one of our major manufacturers. Suitable for PC-AT and other High Density Drives. Lifetime warranty.

10 Disks	£17.95
20 Disks	£32.99
40 Disks	£62.99
60 Disks	£89.99
80 Disks	£119.99
100 Disks	£139.99
200 Disks	£259.99

SPECIAL OFFER BOXES

100 5.25" DS-DD Disks Plus 100 Capacity Locking Disk Box	£38.99
75 3.5" DS-DD Disks Plus 80 Capacity Locking Disk Box	£86.99
25 Coloured 3.5" DS-DD Disks Plus 40 Capacity Disk Box	£41.99

Disk Cleaning Kit-3.5"	£4.95
Disk Notcher/Doubler	£3.95
Disk Cleaning Kit-5.25"	£5.95
IBM Printer Cable	£7.95
Archimedes Printer Cable	£7.95
Laser Printer Toner Cartridge	£89.95
Mouse Mat	£4.95

ASK FOR FREE CATALOGUE!

REXEL BINDERS

11"x14.5" Paper Blue with white stripes

Now Only £9.99 per box of 10

SIXERS

6 stylish plastic library cases for 10 disks.

VAT + carriage inclusive

3.5"	£6.99
5.25"	£6.99

COPY HOLDERS



YU-H32 Copy Holder with Adjustable Arm Size 9.5" x 11.5" with smooth slide line guide £19.95
YU-H32 Copy Holder with Adjustable Arm Size 19" x 12" (A3) £29.95

STORAGE BOXES

3.00" Lockable-Holds 25	£7.49
3.00" Lockable-Holds 60	£8.49
3.50" Lockable-Holds 40	£7.49
3.50" Lockable-Holds 80	£8.49
5.25" Lockable-Holds 50	£7.49
5.25" Lockable-Holds 100	£8.49
5.25" Lockable-Holds 120	£10.95

BRANDED 3.5" COMPUTER DISKS

Sony MF2-DD	£29.95	Sony MF1-DD	£19.95
Goldstar MF2-DD	£24.95	Maxel MF1-DD	£19.95
3M MF2-DD	£29.95	3M MF1-DD	£24.95
Verbatim MF2-DD	£49.95	Verbatim MF1-DD	£29.95
Verbatim MF1-DD	£19.95		

VERBATIM OR 3M BRANDED 5.25" - PRICE FOR 20 DISKS

SS DD 48TPI	£24.99	DS DD 48TPI	£28.99
DS DD 96TPI	£35.99	DSDH	£48.99

3.5" TOP QUALITY-BULK PACKED DISKS

	10	25	50	100	150	200
Single sided 135 T.P.I.	£12.49	£23.95	£46.95	£91.95	£129.95	£169.95
Double sided 135 T.P.I.	£14.49	£26.95	£52.95	£98.95	£145.95	£189.95

RAINBOW PACK OF FIVE COLOURS-NEW PRODUCT!

Single sided 135 T.P.I.	£17.95	£35.95	£62.95	£119.95	£169.95	£219.95
Double sided 135 T.P.I.	£19.95	£39.95	£75.95	£145.95	£214.95	£279.95

Packs of 10 3.5" disks come with a free plastic library case (worth £1.49!)

All disks are supplied with labels and are certified 100% error free

Rainbow 3.5" disks come in blue, red, green, orange and yellow. White and black are also available on request

CENTEC DISK SUPPLIES

UNIT 3, THE METRO CENTRE, BRIDGE ROAD, ORPINGTON, KENT BR5 2BE

TEL: (0689) 35353 (6 Lines)

Please note we operate a call stacking system.

Outside office hours a telephone answering machine will take your order

Fax: (0689) 77737

Same day dispatch if ordered before noon!

Remember - The price you see is all you pay! All prices include delivery


Personal callers welcome: Monday-Friday, 9.30am to 4.30pm




VOLTMACE



COMPATIBLE

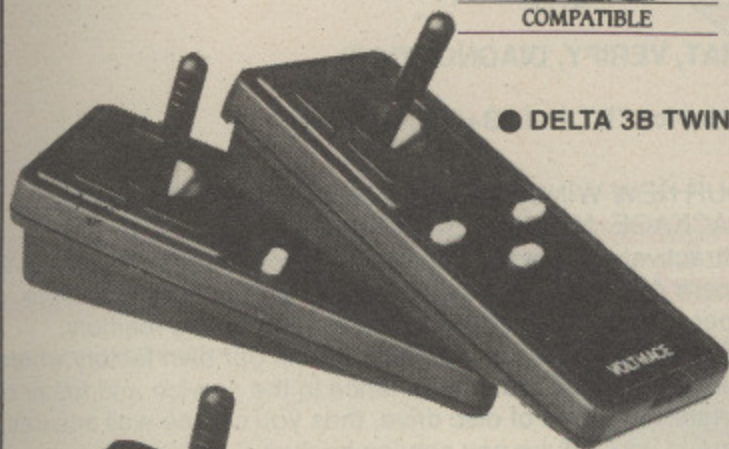


● DELTA 3B TWIN

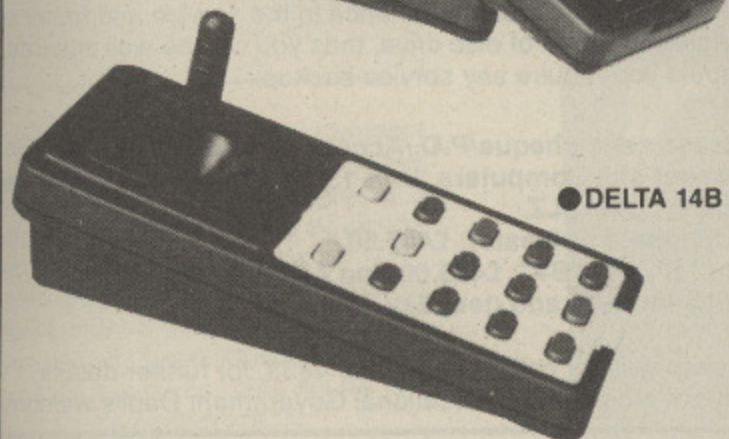


● DELTA 14B



● DELTA 3S or 3SO

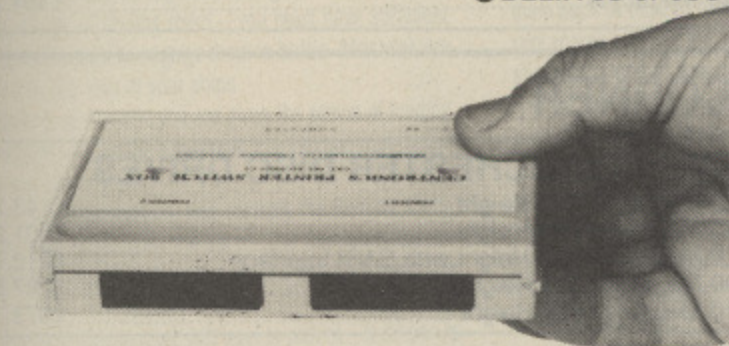

● DATAPRINT 2P

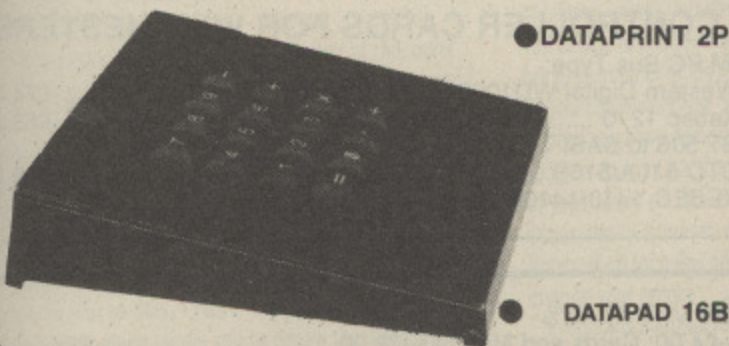

● DATAPAD 16B

SPECIAL OFFER WHILE STOCKS LAST

Double Sided, Double Density, 80 Track,
1/2 Height Olivetti DISC DRIVES with lever fronts in cream steel
cases complete with leads for BBC B, Master etc.

£74.95 inc. VAT and P&P

Also available uncased £60.00 inc. VAT and P&P

FOR A BBC A, B, B + & MASTER

DELTA 3B TWIN -

£19.95

2 joysticks wired to one plug.

As with all our joysticks they have the fast action sprung to centre return of the steel shafted nylon covered joystick. The light action makes them ideal to hold and the 3 fire buttons allow left or right-handed use.

DELTA 3B SINGLE

£12.95

A single joystick that in some ways can act as two. The custom made potentiometers are wired so that it will work as a left hand or right hand joystick. It can run some programs written for two joysticks and has two independent fire functions.

DELTA 14B

£14.95

Our original ACORN/BBC handset. The same super light joystick, but with 14 long life buttons, video game tested for many years. A DELTA14B/1 is needed to run the keypad but a 14B on it's own will work as a joystick and fire buttons, so you can always add the 14B/1 to it later.

DELTA14B/1 for use with 1 or 2 DELTA 14B's

£14.85

DELTA DRIVER CASSETTE

£5.95

The A/D/USER PORT interface box. This gives simultaneous access to both the analogue port, for the joystick part and the user port, for the keypad. Two handsets can be plugged into the box giving a total of 24 user definable keys.

N.B. On a Master a small extension lead is needed to clear the RGB socket (£5.95 extra).

Full instructions are provided to include the keypad in your own programs even in BASIC or for the non-programmer a DELTA DRIVER cassette is available with keyboard to joystick/keypad conversions and keypad set up programs.

FOR THE MASTER COMPACT OR ELECTRON FITTED WITH A SWITCHED JOYSTICK INTERFACE

DELTA 3S

£12.95

For an ELECTRON with a switched joystick interface (not a PLUS 1) this gives you the same delightful light, fast action of the DELTA joysticks but fitted with a 9 way D plug as per Atari, Commodore, etc. and will run on First Byte interface or similar.

DELTA 3SO - OPTICAL FEED BACK

£19.95

Now you can see exactly when each switch has operated so you can move about faster and more certainly guaranteeing diagonals.

SPECIAL OFFER

CUMANA TOUCHPADS - The touch pad allows you to transfer sketches onto your screen by using a stylus on a touch sensitive pad
Absolute bargain £14.95 inc. VAT and P&P

Monday - Friday callers only

A selection of green screen monitors from £29.95 to £59.95

NEW !!! DATAPRINT 2P LOW COST - LOW PROFILE - PRINTER SHARER

£34.95

A neat small unit which allows two parallel printers to be connected to one computer and simply switched between the two. e.g. one printer for paper and one for labels.

DATAPRINT 2C LOW COST - LOW PROFILE COMPUTER SHARER

£34.95

The opposite of the DATAPRINT 2P this little box just 125 x 90 x 20mm allows two computers to share one printer.

Computer to Sharer leads

£5.00

Sharer to Printer leads

£5.00

DATAPAD 16B

£39.95

A commercial spec. 16 way keypad. Full travel mechanical keys with double shot moulded keycaps mounted in a low profile metal case. The keys are marked with calculator legend, but the software included allows the pad to be defined as any keys, including function keys or single byte VDU commands such as PRINTER ON/OFF. No tampering with the computer as it fits onto the user port.




Available from your dealer
or direct from us on
(0462) 894410



Another Sensational Offer from Copper Mill Computers

INTRODUCING OUR NEW 20MB WINCHESTER DISC DRIVE SYSTEM FOR THE ACORN BBC B/B+ AND MASTER

20 MEGABYTES OF MEMORY FROM ONLY £447.50

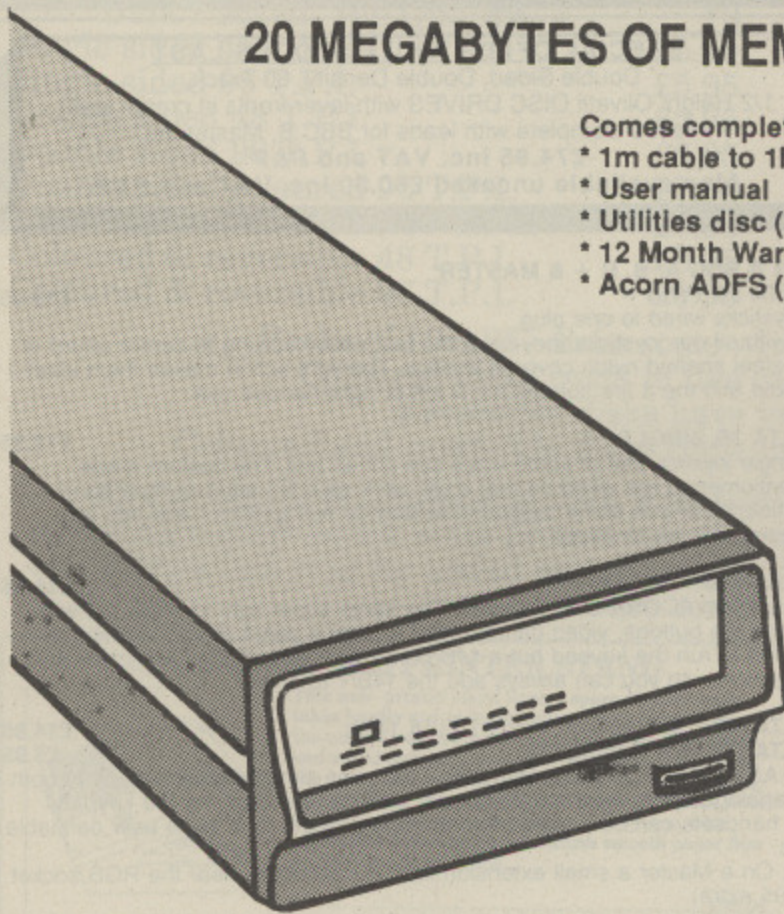

- Comes complete with:
- * 1m cable to 1MHz bus + through socket
 - * User manual
 - * Utilities disc (FORMAT, VERIFY, DIAGNOSTICS)
 - * 12 Month Warranty
 - * Acorn ADFS (essential for "B" and "B+")

OUR NEW WINCHESTER COMES AS A COMPLETE PACKAGE. NO HIDDEN EXTRAS!

Attractively packaged our system is totally compatible with the Acorn ADFS and associated software. Our manual covers operation and use of the available high speed memory. This whole system is manufactured in our own factory where we have gained great experience in the service and repair of virtually all types of disc drive, thus you can be well assured should you require any service backup.

Please send cheque/P.O./Access or Visa to:
Copper Mill Computers, Unit 13, 193 Garth Road, Morden, Surrey. SM4 4LZ.

*Enclose: For Master: £447.50.
For "B" and "B+": £475.00 (inc ADFS ROM)
Price inc VAT and next day delivery.

Please write or call us on 01-330 4838, for further details.
Official orders from Educational Government Dept's welcome.

NEW LINES FROM COPPER MILL COMPUTERS AT BARGAIN PRICES

BARCO 26" COLOUR MONITORS

Ideal in situations where single or multiple screens are required for use as class/lecture theatre demonstration display units. Also may be used as screen only for television/video use. BNC type composite video in/out sockets. A quality PAL colour monitor for only ...
£287.50 INC. CARRIAGE

MANUALS

Twin Volume Export BBC 'B' manuals covering DFS, Speech and VIEW. A very comprehensive set of manuals.
£20.00 (no VAT)

CASED-UP FLOPPY DISC DRIVES WITH POWER SUPPLY

Single 40-Track Double Sided £92.00
Single 80-Track Double Sided £94.30
Single 40/80 Track Switchable Double Sided for BBC £101.20

WINCHESTER UPGRADE KITS FOR IBM PC & CLONES (inc. cables)

20 Megabyte £281.75
30 Megabyte £368.00
40 Megabyte £454.25

HOBBYISTS CORNER

FLOPPY DISC DRIVE CHASSIS

Top quality units from Teac, Mitsubishi, etc. All drives are single/double density.
40 Track Double Sided (180K/360K) £69.00
80 Track Double Sided (360k/720K) £71.30
40/80 Track with face plate mounted switch £78.20
(Ideal for BBC)

WINCHESTER DISC DRIVES

10 Megabyte Half Height £143.75
20 Megabyte Half Height £201.25
20 Megabyte Half Height with SASI Interface £212.75
30 Megabyte Full Height £287.50
40 Megabyte Full Height £373.75

WINCHESTER ADAPTOR FOR BBC 1MHz BUS.

Bare Circuit Board £17.25
Populated Circuit Board £40.25
Populated Circuit Board c/w instructions and software to assemble BBC Winchester Subsystem £57.50
N.B. Details of Winchester Subsystem for Atari available soon

CONTROLLER CARDS FOR WINCHESTERS

IM PC Bus Type:
Western Digital WD1002 £74.75
Xebec 1210 £63.25
ST 506 to SASI Type:
DTC 510A/510B £86.25
XEBEC 1410/1410A £143.75

ALL OUR PRICES INCLUDE VAT AT 15%
Postage and Packing as follows: Disc Drives-£4.00; Cards and Manuals-£2.00.
Please ring for quote on quantity purchase
All our goods are covered by a 12 month warranty (excluding P&P) except where specified

SOFTWARE SCENE

BISMARCK – DEATH of a BATTLESHIP ... strategic war simulation

Price: £14.95 (disc)
 Supplier: BBC Soft, PO Box 234, London SE1 3TH.
 Tel: 01-576 0548

I HAVE never been a great lover of wargames which involve working out tactics, moving forces around a map and trying to out-think your opposition. I usually prefer games full of excitement and action. But Bismarck – Death of a Battleship has opened my eyes to a different style of game.

The aim is simple, though achieving it is anything but. You are Commander-in-Chief of the Allied Forces and you must seek out and destroy the German battleship Bismarck while ensuring that five large convoys making their way slowly across the Atlantic are adequately protected.

You have at your disposal six battleships, two aircraft carriers, 14 cruisers, four destroyer flotillas, two submarine packs, five bomber squadrons and three reconnaissance planes. All this against one battleship, a heavy cruiser, three submarines and three tankers. You'd think it would be easy, but it isn't.

For a start, you have a very large area of the North Atlantic to cover, and the convoys you're protecting are spread all over the place and can be attacked at any time.

Also the Bismarck and its companion – the heavy cruiser Prinz Eugen – are fast, have excellent radar and are very good at avoiding the many ships and planes you may have out searching for them.

Add to that the fact that the combined fire-power of the two German ships is very strong and you begin to realise that it's not just a case of finding them – you must have sufficient strength in the area to engage them in battle. Mistakes are punished by the loss of your ships.

On booting up the disc you are given the option of loading a saved game or starting a new one. You can then opt for the one or two-player game.

In the two-player version, one controls the German ships, but the game is basically the same. The German ships are out to sink as many convoys as possible and then reach the safety of port – in this case Brest.

You can now decide what skill level to play at – level one is easiest, level five hardest. You can also specify how many moves you wish the game to last – between 20 and 99.

The victory conditions can also be selected at this point. Sinking enemy ships and safely escorting convoys earn you points. You can either opt for victory to be decided on points or whether the Bismarck is sunk.

One of the nice things I found was the fact that if you get bored with the original scenario there is an alternative which is harder to play and involves more German shipping.

The game mechanics are complicated at first but you soon get used to how to play. I found it best to concentrate on using the A key which allows you to review the status of all



your resources and to give them all instructions.

For instance you can order the battleship Hood to go North at 25 knots and be on battle alert. Then you could instruct the cruiser Dorsetshire to patrol an area, and you can send ships into the same area as a convoy to get them refuelled.

The amount of fuel a ship or plane has is important, and once or twice I've managed to lose them through not ordering them back to base to refuel. The sound used in the game is very sparse with just the occasional warning indicating a fuel shortage in one of your vessels.

Once you have given all your orders for the move, you can enter the Projected Mode, which shows you the position of all your ships and planes together with where they will be after carrying out the orders you have given them. This is handy, as it allows you to change the orders if the ships aren't going quite where you intended.

The ideal situation is to get lots of your ships into the same area as the Bismarck – not an easy task. If you manage it you have a choice to make. You can engage the Bismarck, which is unwise unless you have several ships in the area, or you can decide to shadow her, which gives you a better chance of bringing in other ships later because you know where she is. Or you could withdraw or ignore her.

Once you have decided to engage, the battle starts and all you can do is sit back and wait for news. At this point it's out of your hands and the conflict could go on for quite a while. Occasionally, however, radio contact with your forces may be established for a few seconds and during this period you can change your orders.

Eventually the final report will come in: The outcome could

be the destruction of the Bismarck or possibly the sinking of all the Allied forces in that area.

The game comes with a well printed 48-page instruction booklet which includes full instructions for the game, hints on how to win, and lots of background history on the German Navy and the events leading up to the sinking of the Bismarck. Also contained are two maps of the North Atlantic which have 20x25 grids overlaid on them.

On the disc you will also find a couple of useful programs: One is CON4080 which converts the disc from 40 to 80 track format, and the other is SHOWMAP which simply displays a map of the North Atlantic on the screen. This, too, is overlaid by the 20x25 grid and you can print it if you have a screen dump routine.

After playing Bismarck for a while it began to dawn on me that I was really enjoying myself. It's addictive.

The first time I succeeded in sinking the Bismarck I wasted no time in trying out the alternative scenario.

It just goes to prove that games don't have to involve complicated mazes or stunning graphics to be enjoyable. Bismarck is a definite must for those of you who like wargames, but I also think that quite a few others will be pleasantly surprised at this fascinating game.

Desmond

Sound	6
Graphics	8
Playability	9
Value For Money	8
Overall	9

SOFTWARE SCENE

TUTANKHAMUN'S REVENGE ... Egyptian adventure

Price: £7.95 (disc)
Supplier: Bug-Byte, Victory House, Leicester Place, London WC2H 7NB.
Tel: 01-439 0666

In order to protect their wondrous treasures from the unwelcome attentions of grave robbers, it was customary for the Pharaohs to put a curse on the entrance to their tomb. Convincing yourself that it's just a load of superstitious rubbish, you prepare to enter Tutankhamun's tomb. Will you return a millionaire? Will you return at all?

The treasures for which you search are cleverly disguised as golden keys and there can be up to four in any one room. You are allowed to wander relatively freely through the tomb and there's no need to collect every key in a room before you move on to the next. In fact some rooms must be entered via two different doors if you are to collect all the treasure.

The instructions recommend that you map the tomb, as certain of the rooms operate a one way system on their exits: They will let you out, but you'll have to find a different way back in. The map is also useful when you want to return to the surface to deposit your treasure in the bank.

A total of five explorers are provided to help you complete

your task. These are lost through contact with giant spiders that frequent most rooms, or by dropping them through a distance of greater than one brick. There is no time limit so you can sit and ponder a screen for as long as you wish before making a move.

The danger of death via gravity can give rise to certain dilemmas: Several of the exits present themselves as pits and unfortunately some prove bottomless. As a general rule the narrower exits are the genuine ones – but don't hold me to that.

The program comes with a Revenge Designer – three programs that can be used to create sprites and screens, and then put them all together as a complete game.

The screen utility allows the addition or removal of bricks, sprites, lifts, trapdoors, moving floors and treasure. Screens may be played or edited at any stage of development and this allows you to perfect a display before saving it to disc for inclusion in the finished game.

The character designer can be used to create new, or edit existing sprites. Characters are edited on a large grid and may contain up to four colours. The third program – the game designer – will load up to a maximum of 20 of your screens from disc in a pre-determined sequence.

As arcade adventures go, Tutankhamun's Revenge breaks



no new ground. The graphics are only mediocre, with amateurish sprites patrolling around crude backdrops. Even the music is second rate – a laborious Egyptian ditty that is best turned off.

Carol Barrow

Sound	4
Graphics	6
Playability	6
Value for money	8
Overall	6

KINGDOM of HAMIL ... updated re-release

Price: £9.95 (40 track disc, BBC B, B+ and Master)
Supplier: Topologika, PO Box 39 Stilton, Peterborough PE7 3DL.
Tel: 0733 244682

I AM so pleased to see the re-release of several adventures that richly deserve the title *classic*. Kingdom of Hamil was first issued about four years ago, but has been virtually unobtainable for the past two.

Topologika presents its adventures in excellent packaging, and there's a helpful booklet by Peter (Philosopher's Quest) Killworth on how to play adventure games which will prove invaluable for beginners. A cleverly designed hint sheet works in conjunction with the Help feature on the disc.

If after that you are still unable to proceed, write to Topologika enclosing a SAE and you will receive a personal reply.

You will find dire warning about attempting to copy the original disc but get clear step-by-step instructions on preparing a disc to play from.

"Hamil is a land of sorcery and romance, a place of strange but loyal beings, of immense fountains, with a castle and a museum full of bizarre antiquities which only the king can put to use..." runs the opening, and the game does not disappoint.

To put you in the picture: You are the true, but dispossessed king. Once kidnapped in infancy, you now set about to reclaim your throne.

The opening descriptions are in elegant prose which is a

delight to read, together with a clear hint that you should start by exploring the chapel rather than attempting to do outside.

It reads: "You are at the western end of a primitive stone chapel. Light streams in through the windows which are set high above your reach in the entirely featureless walls of the building. A plain arch leads northwards to the world outside which, as you know from experience, is extremely hostile". Anyone who tries to go north after that is just plain daft.

The parser has been updated from the original release to permit the input of the *Take everything* variety, together with exceptions and exclusions. *Examine* is redundant, since the location descriptions contain all the information that an adventurer needs.


The first puzzle – how to leave the chapel – is straightforward, and the next teaser involves a little decoding to obtain the password to enter the next chaining puzzle which also involves a vampire.

As is to be expected from here on the complexity escalates with the first maze manifesting itself to the thunderous noise of rock slides. I am not a noted fan of mazes, but the one here which contains the hungry T. Rex certainly kept my adrenalin flowing.

Making a careful map of this game is essential, and you can expect to expire frequently at various points in your quest. Luckily there is a Save facility.

I was delighted to see this package and recommend it unreservedly. Master owners please note that it is compatible.

Mad Hatter

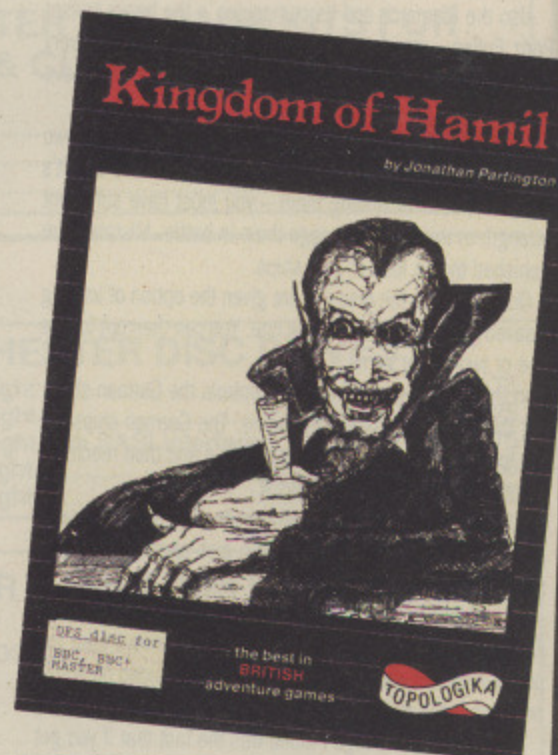

Sound	N/A
Graphics	N/A
Playability	9
Value for money	9
Overall	9

SOFTWARE SCENE

CHART CHALLENGE '88 ... demanding musical teasers

Price: £9.95 (disc)

Supplier: Outlook Enterprises, 86 Glenmore, Clayton-le-Woods, Chorley, Lancashire PR6 7TB.
Tel: 0772 34894

In the January 1987 issue of *The Micro User* I reviewed the original Chart Challenge program and hailed it as being a must for the music buff. A year has passed since then, and Steve Close has not been idle. Spurred on by his original success, he has written the new, improved, Chart Challenge '88.

The original program consisted of a group of four quiz-orientated games that could be played in any order. They loaded their data from a total of eight 40 track data discs which spanned the years 1952 to 1985.

The 40 track version of Chart Challenge '88 is supplied on a single, reversible floppy disc. This reduction in database size has been achieved by axeing the album titles and song lyrics featured in the original game.

The new Challenge is eminently more playable than its predecessor. Under the new format, your musical knowledge is pushed to the limit in seven rounds. Your score is kept as a running total and is stored on disc when you complete the final section.

Options is a multiple choice, question and answer game. A question—relating to your chosen decade—is displayed on the screen with two answers below it. Select correctly and you move on to the next question.

This continues, with an increasing number of possible answers, until you answer incorrectly or the time limit expires.

A much improved **Hangman** program constitutes round two, and here you have to guess both the single and the artist before the time limit expires and you get another go.

Link Lines begins with a 3x3 grid of coloured squares, with each colour representing a different era. Your task is to answer three questions in a line, either vertically, horizontally or diagonally. Success is rewarded with a new grid of increased dimensions.

Matching song titles to their artists, years released or highest chart position is the objective of **Connections**. As with all of the other games, the round ends with the first incorrect answer.

A ladder is used to chart your progress in round five—**True or False**. By giving the correct response to a displayed statement, you are moved one rung up the ladder while the first wrong answer moves you down by one rung, a second failure by two rungs, and so on.

As its name suggests, **Gold Run** bears more than a passing resemblance to a popular TV quiz game. The screen is filled with 20 hexagonal tiles each containing the initial letters of a song title. When you select a hexagon you are given the title, but with one word omitted—enter this to win the tile. To complete the round you must cross the screen from left to right before the time limit expires.

Options returns in round seven, but this time you can specify the number of answers that you want displayed.

The original Chart Challenge was good, and the 1988 version is magnificent, I guess I'll run out of superlatives in 1989.

Carol Barrow

CHART CHALLENGE



POP QUIZ

88C MODEL 88MODEL 88MASTER
ACORN ELECTRONIC

Sound	N/A
Graphics	9
Playability	10
Value for money	10
Overall	9

CYBOTO ... another maze game

Price: £9.95 (cassette) £11.95 (5.25in disc) £14.95 (3.5in disc)

Supplier: Go-Dax, 12 Chiltern Enterprise Centre, Station Road, Theale, Berkshire RG7 4AA.
Tel: 0734 302600

CYBOTO, the latest offering from Go-Dax, is a mixture of Repton and Gauntlet but lacks the variety and originality of either. You are at the heart of a futuristic maze playing the part of Cyboto—the last of the cyborgs. The title screen offers two options in addition to playing the game. The first, Info, displays five geometric snowflakes—four are enemy androids that should be avoided and the fifth, a Pod, represents treasure that you collect.

Option two is your gateway to the higher levels. Every maze has a name, and by entering it as a password you can start from the highest level reached so far.

Each maze contains 10 pods and a running total of the number collected is displayed at all times. The first few pods are unguarded and easy to find, but the last couple are hidden down convoluted corridors and guarded by droids. You've got problems. As soon as the final pod is in your grasp you are teleported to the next—indefinitely more fiendish—maze. Halfway through level one I was experiencing diffi-

culties: Some of the pods were situated at the bottom of mined cul-de-sacs with no safe path through.

Cyboto didn't appear to have any offensive capabilities, just movement in the four compass directions. A thorough exploration of the keyboard revealed not only Cyboto's force shield, but also a map of the whole maze, complete with the pod positions.

The shield is activated by holding down Shift and power is represented by five horizontal bars at the bottom of the screen. These shrink when the shield is on and recharge slowly when it is not in use. Walk through an android with your shields up and he vaporises instantly—once zapped they do not reappear.

Apart from death by droid, you may also lose a life by taking too long to complete the maze. A time limit of 7000 units begins to tick away as soon as you start and the speed of tick increases tremendously when you take a look at the map, so use this facility sparingly. Rather sneakily the programmers have rendered the pause option inoperative while you're using the map screen.

The mazes are a similar size to those used in Repton but are not bounded by solid walls—if you walk far enough in one direction you will eventually return to your starting point. The game lacks a puzzle element like the precariously-balanced



boulders in Repton.

Cyboto has all the makings of a good maze game, but it needs some kind of gimmick if it is to sell well in this very competitive area of the games market.

James Riddell

Sound	6
Graphics	7
Playability	7
Value for money	7
Overall	7


QUEST . . . underground adventure

Price: £9.95 (cassette), £11.95 (5.25in disc), £14.95 (3.5in disc)
Supplier: Superior Software, Regent House, Skinner Lane, Leeds LS7 1AX.
Tel: 0532 459453

WALTER Cobra – amateur inventor and part-time adventurer – has discovered an ancient map, the contents of which reveal the location of a fabulous treasure known as The Golden Dragon. So eager is he to begin his quest that he enters the labyrinth without the map – and now, hopelessly lost, he desperately needs your help to explore the caverns and locate the treasure.

Absentminded he may be, but at least he remembered to pack the rest of his adventuring gear – eight stun grenades and a pair of anti-gravity boots. The function of the stun grenades is twofold – they will immobilise the majority of the robotic guards that you'll encounter, and they're also very effective at demolishing nuclear reactors of which the labyrinth contains three.

The playing area is laid out in grid fashion. This is eight screens wide, but I am unsure as yet of its vertical extent. The designs are many and varied, but they are all immaculately drawn and cleverly constructed – each one creating the maximum difficulty with the minimum of effort. Merely recovering some golden relic would be far too easy

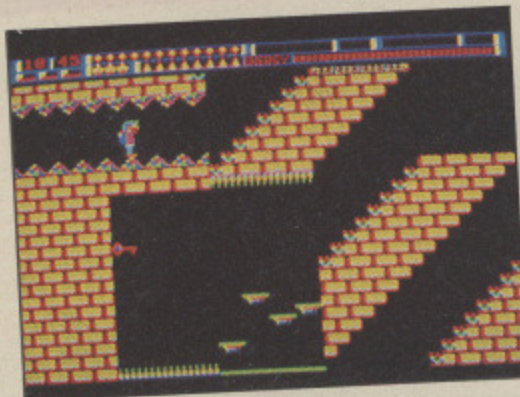

a task for an adventurer of your calibre, so Superior decided to complicate matters. In addition to the Golden Dragon, you must collect 12 power crystals, destroy three reactors, interrogate eight computer terminals, and solve a series of puzzles in the special rooms.

There is often more than one exit from a screen, and consequently more than one route through the labyrinth – but only one is correct. You will soon discover that many of the paths are barred by locked doors – a symbol displayed beneath the door can be used to help identify the relevant key.

Walter's mode of transport is determined by the properties of the current room. His jet boots are only operative when there is a large triangular shape present, otherwise he is

restricted to running and jumping. It is useful to remember that the left and right keys remain operative when falling, thus allowing you to control Walter's drift during his descent.

The alien inhabitants of the labyrinth display varying degrees of aggression. Some will go about their own business, ignoring your presence, and the rest are just downright nasty. You are unlikely to outrun such an alien in a horizontal plane, but the turbo boost button on your boots should enable you to escape vertically.

Stun grenades are only effective against mechanical adversaries. You are advised not to use them indiscriminately as a badly timed detonation can leave a concussed android blocking your exit. On the other hand I found that a robot, if halted in the correct position, could be used as a platform to gain extra height when jumping.

It is obvious that Superior's programmers have put a great deal of time and effort into creating Quest. It has the polished graphics of a first rate arcade game and the frustration factor of a top class adventure. What more can I say?

Jon Revis

Sound	7
Graphics	9
Playability	9
Value for money	9
Overall	9

CONQUEROR . . . 3D tank power

Price: £24.95
Supplier: Superior Software, Regent House, Skinner Lane, Leeds LS7 1AX.
Tel: 0532 459453

If there's one type of game I really don't like, it's a computer version of table-top wargames – all that map strategy just leaves me cold. What I want is a thinking man's shoot-em-up like Elite – and Conqueror fits that bill.

I was given a demo version to review and what I got lacked many of the refinements that the draft manual promised, but even so was highly addictive.

In Conqueror you are in command of one or more tanks on a battlefield against a set of micro-controlled opponents. Each battle level gives you greater numbers and more powerful tanks against increasingly menacing opponents with up to 15 tanks on each side.

In each game you can choose between either having American and British, German or Russian forces, against one of the other two. Each Power has four types of tank – one light, two medium and one heavy – all based on genuine Second World War machines.

But the key difference between Conqueror and any other similar game to date is that you play in real time on a three-dimensional scrolling landscape with trees, houses and rivers. Does that sound familiar? Well, this game – written by Jonathan Griffiths – uses David (Elite/Zarch)



Braben's landscape drawing routines.

The first game is referred to as arcade and consists of a series of battles with your group of tanks against the computer-driven ones. The first combination at level zero is an American Chaffee – fast and light – against a Panzer III which is less powerful but the micro is a better shot. I found that driving round in circles with the turret facing in toward the enemy was the best tactic.

At all levels you can choose between manual or automatic tank strategy. In the former you control where the tanks on your side go; in the latter this is controlled by the micro, but you can override it.

Tactical control is via the map, you select a tank and click

the position you want it to move to. However, on the ground the micro-controlled movement leaves a little to be desired and it is fairly common for tanks to either disable or even destroy themselves by running into objects. But for the most part they do manage to avoid these hazards and get on with the battle.

Water provides the greatest obstacle: I have yet to see a tank cross a river of its own accord.

For the more serious player there are the Attrition and Strategy games. In the first format you have a standard set of tanks – two light, two medium and a heavy – but the computer starts off with an inferior selection. In each successive battle the computer's selection becomes more and more potent.

Finally there is the Strategy game in which you can choose the tanks you require from a fixed budget, and the micro does likewise. When you win a battle the budget increases. Within this game there are other options such as use of spotter planes and artillery fire which can be bought at the cost of some tank power.

Lazarus

Sound	6
Graphics	9
Playability	9
Value for money	9
Overall	9

MICRONET. THE FIRST TRULY INTERACTIVE MAGAZINE.



**WITH 250,000 PAGES,
150,000 CONTACTS, AND MORE
EXCITING SERVICES, YOU NEVER
KNOW WHAT'S GOING TO POP UP.**

Micronet. The interactive magazine. Modem-linked by phone to your computer. Original, creative, exciting, 24 hours a day, 365 days a year. **Communications** including interactive chatlines, teletalk, bazaar, your own electronic mailbox, and download free programmes.

Information with more than 1/4 million frames. **Entertainment** from prize quizzes to Multi-User Games . . . and all for a low-cost local call. Complete the coupon, pop it in the post, and receive full details, or contact the Sales Desk on 01-837 7872.

 **TELEMAP GROUP LTD**
TELEMAP GROUP LTD DURRANT HOUSE
8 HERBAL HILL LONDON EC1R 5EJ

I AM VERY INTERESTED IN MICRONET. PLEASE SEND ME FULL DETAILS.

NAME _____

AGE _____

ADDRESS _____

TEL. NO. _____

MACHINE TYPE
MU/MN/588



MICRONET

FREE
MODEM
WITH 1st YEAR
SUBSCRIPTION -
WHILE STOCKS LAST!

BT APPROVED for connection to telecommunication systems specified in the instructions for use subject to the conditions set out in them.

S/112/92/000674

If you already have a modem and computer software dial 021-618 1111 password 4444 ID 4444444444 for a free demonstration

MASSIVE SAVINGS FROM THE MEGA-COMPUSTORE

ARCHIMEDES	
305 BASE AKB10	695.00
305 & mono monitor	728.00
305 & colour monitor	865.00
310 BASE AKB15	752.00
310 & mono monitor	804.00
310 & colour monitor	952.00
A310M AKB30	815.00
A310M mono	865.00
A310M colour	1014.00
410 SERIES	
Entry System	1399.00
Mono	1449.00
Colour	1599.00
440 SERIES	
Entry System	2299.00
Mono	2349.00
Colour	2499.00
Archimedes/Master Econet	43.00
0.5 MB RAM	89.00
Floppy disk	125.00
20 Mbyte hard disk & podule (300 only)	499.00
Podule Backplane	35.00
Archimedes Pref. Manual	29.95
Assm. Lang Prog Manual	11.00
Archimedes software in stock	
MASTER 128	
Complete with internal software	346.00
Master Turbo Upgrade	99.00
Master Econet Module	40.00
Master 512 Upgrade	189.00
Universal second processor	75.00
Eprom Cartridge	13.00
Reference Manual Part 1	13.00
Reference Manual Part 2	13.00
BBC MASTER COMPACT ENTRY SYSTEM	
128K *Single 640K Drive*	
Bundled Software	313.00
TV SYSTEM	
128K *Single 640K Drive* *UHF Modulator* *Bundled Software*	326.00
MONO SYSTEM	
128K *Single 640K Drive* *Bundled Software* *12" High Res Monochrome Monitor*	358.00
COLOUR SYSTEM	
128K *Single 640K Drive* *Bundled Software* *14" Medium Res Colour Monitor*	491.00
MONITORS	
Phillips BM 7502	
12" Hi res. P31 Green Phosphor Screen. CVBS input. Audio input Band width 20 MHz. 2000 CHRS Display	68.00
Phillips BM 7522	
Amber Screen	82.00
Phillips BM 7542	
Dedicated WD phosphor Screen monitor	82.00
Phillips BM7513	
12" Green IBM compatible	104.00
Taxan KX117	
12" Green Screen P31	77.00
Taxan KX118	
12" Green Screen P39	86.00
Taxan KX119	
12" PUL Amber Screen	86.00
Taxan Super Vision 620	
	260.00
COLOUR MONITORS	
Phillips CM8833	
14" CVBS and RGB medium resolution colour monitor. IBM PC compatible. Fast blankup to enable superimposing. Stereo Audio. Ear phone socket. 600 dots x 285 lines vertical	234.00
Phillips CM8852	
14" RGB professional med res colour. 700 dots x 285	251.00
Phillips CM8873	
14" RGB high resolution colour monitor Res 850 x 480	478.00
MONITOR TO TV CONVERTER	
AV 7300 Colour tuner module. Push button control. 12 preset channels. Built in aerial. Compact design. Composite video only	60.00
SWIVEL BASE	
Tilt and swivel base for 12" or 14" monitor or TV. "Looks very elegant" at an unbeatable price	9.00
SERIAL & PARALLEL T SWITCHES	
Parallel T switch (2 way)	15.00
Parallel T Switch (4 way)	25.00


MITSUBISHI DISC DRIVES	
Source 100% BBC compatible slimline disk drives. All drives supplied complete with formatting diskette, comprehensive users manual and all necessary cables. All drives are 40/80 Track switchable at the front and have two years warranty.	
5 1/4" Drives without P.S.U.	
400A Single 400K Double Sided	98.00
SD 802C Dual 400K Double Sided	190.00
5 1/4" Drives with P.S.U.	
400B Single 400K Double Sided	117.00
SD 802E Dual 400K Double Sided	204.00
SD 802D Dual 400K Drives horizontally mounted in a monitor stand to fit both the BBC B and the Master series	230.00
Mitsubishi Bave drives uncased with 40/80 switch	77.00
SOURCE DISC DRIVES	
Source SD35 3 1/2" disk drive, single drive	69.00
Source SD352 3 1/2" dual drive	125.00
Supplied cased complete with cables, powered from computer. Extended two year warranty.	
Source SD355 3 1/2" single drive with P.S.U.	99.00
Source 352S 3 1/2" dual drive with P.S.U.	173.00
SPECIAL OFFER	
Source 355 Combo Dual 5 1/4" and 3 1/2" drives with P.S.U.	216.00
WINCHESTER DISC DRIVES	
Source HD20 Twillstar's 20 Mbyte winchester drive including Acorn DFS ROM complete with P.S.U.	433.00
Source HDP201 Twillstar's 20 Mbyte winchester drive and a 400K double sided floppy drive built in a plynth to accommodate monitor on the top and the computer underneath. Includes ADFS ROM and P.S.U.	694.00
Source TS10 10 Mbyte tape streamer backup unit with utilities.	565.00
Other size hard disks are available, please call for our latest prices.	
FLOPPY DISCS	
Raven 5 1/4" pack of 10 in a clear library box	13.04
Raven 5 1/4" rainbow colour pack of 10 in library box	13.04
Raven 3 1/2" single sided pack of 10 in library box	12.00
Raven 3 1/2" double sided pack of 10 in library box	22.00
LOCKABLE STORAGE BOXES	
Trackmaster 5 1/4" 70 x 5 1/4" lockable	7.00
Trackmaster 5 1/4" 100 x 5 1/4" lockable	9.00
Trackmaster 3 1/2" 40 x 3 1/2" lockable	6.00
Trackmaster 3 1/2" 100 x 3 1/2" lockable	9.00
PRINTERS	
CANON PW1080A	
80 column. 160 cps draft 40 cps NLO. Built in friction & tractor feed.	217.00
CANON 55A	
Wide version. IBM compat.	347.00
NEW JUST ARRIVED	
STAR LC-10	
New enhanced version complete with IBM & Parallel Interface	182.00
Sheetfeeder	POA
STAR LC-10 Colour	POA
Ribbon	4.70
STAR NB24-10	415.00
STAR NX15	269.00
STAR ND10	259.00
STAR ND15	365.00
STAR NR15	425.00
STAR NR10	325.00
STAR NB15	585.00
STAR NB24-15	525.00
MP200	
200 cps draft. 40 cps NLO. 7K buffer (128 downloadable characters in NLO) optional 8K memory.	255.00
MICRO P MP165	
80 Columns. 165 cps in draft. 35 cps NLO. Ultra high res. graphics. Friction and tractor feed. 2 Year warranty. Epson or IBM compatible	173.00
MP201	
As MP200 with 136 columns.	299.00

MP135	
135 cps, 80 column printer. Friction tractor feed. NLO. Epson & IBM Compatible	126.00
MP480	
480 cps dot matrix printer. 74 cps NLO. 80 column. Epson & IBM compatible. Std parallel	303.00
TAXAN KXP815	
Taxan KYP 815 new enhanced KP 810 with 160 cps and fully Epson & IBM Compatible	260.00
TAXAN KZP915	
Taxan KXP 915 New enhanced KP 915 with 180 cps and fully Epson & IBM Compatible.	365.00
CITIZEN LSP 100P	
120/25cps 80 column Centronics IBM Parallel	175.00
CITIZEN LSP 100S	
120/25cps 80 column RS232 Serial	199.00
CITIZEN MSP 10E	
160/40cps 80 column Centronics IBM Parallel	239.00
CITIZEN MSP 10E	
160/40cps 80 column RS232 Serial	239.00
CITIZEN MSP 15E	
160/40cps 136 column Centronics IBM Parallel	251.00
CITIZEN MSP 15E	
160/40cps 136 column RS232 Serial	346.00
CITIZEN MSP 15E	
200/66cps 136 column dual interface	561.00
PREMIER 35	
Daisy Wheel 35cps 136 column Centronics IBM Parallel	434.00
PREMIER 35	
Daisy Wheel 35cps column RS232 Serial	494.00
CITIZEN LASER	
Overture 110	1303.00
TECO VP1814	
Overture 110	173.00
EPSON PRINTERS	
LX-800	199.00
FX-800	320.00
FX-1000	433.00
EX-800	399.00
EX-1000	545.00
LQ-800	430.00
LQ-1000	580.00
LQ-2500	865.00
CO-2500	1126.00
PANASONIC KX-P3131	
Fully Formed Serial Impact Daisywheel Printer. Print speed 17cps. Diablo compatible print wheels. Print pitches available are: 10, 12, 15 and proportional spacing. Standard friction feed and optional tractor. Standard Centronic optional RS232C. Built with 6K text buffer expandable to 32K buffer.	251.00
BROTHER HR 20	
Daisywheel 8K standard buffer upgradable to 16K. Standard serial and parallel port	338.00
JUKI Daisywheel	
Juki 6100	286.00
MP26 Daisywheel	
Universal compatibility with almost all personal computers at an unbeatable price. Speed: 26 cps. 132 columns Diablo 630 compatible	216.00
Optional Tractorfeed	82.00
Optional Sheet feeder	126.00
GAKKEN GPR-2000	
Print speed of 18 characters per second. Fully Qume compatible. Takes Qume exchangeable Daisywheel and ribbons. Selectable 10, 12 & 15 pitch. Supports proportional spacing. Standard friction feed. Tractor/cut sheet feeder and serial interface optional.	146.00

Take a holiday while your Computer is being repaired. Or take out one of our repair contracts and be working before you can even get to the airport. Twillstar Computers Maintenance Division Authorised Service Centre for Amstrad and most IBM Compatibles. 24 hour on site and in house maintenance contracts with loan equipment provided. In house repair service on Disk Drives, Printers, Modems, Systems and monitors. For further details call our **Maintenance Hotline on 01-574 5271**

SPECIAL OFFER

NEC P2200 PINWRITER
275.00 + VAT



FREE PRINTER CABLE (for BBC, Master, Archimedes, Electron, IBM Compatible Please specify) FREE PRINTER STAND. FREE 200 SHEETS PAPER SHEET FEEDER £59.00

RIBBON £5.50

WHY SPEND MORE FOR PROFESSIONAL RESULTS? 24-pin dot-matrix printer. Letter-perfect print, in several sizes, at 56 characters per seconds (cps). Or switches to draft mode for high-volume outputs at 168 cps. A vast selection of typeface options and superb graphic capabilities. Built-in tractor that permits push or pull feeding of continuous forms - with a tear bar for quick, easy removal of receipts, packing slips, or other demand documents. And the front feed function lets you insert cut sheets or continuous forms into the front of the printer.

Print Rate: High-speed draft: 168 cps. Standard draft: 140cps. Letter quality: 56 cps
Printhead: Impact, 24-pin dot matrix. 0.2mm diameter. 2 x 12 staggered array
Vertical Line Spacing: 6 or 8 lines per inch (lpi) Programmable up to 360 lpi
Resident Type Fonts and Variations: Draft Gothic: 10, 12, 15, 17, and 20 pitches. LO Courier: 10, 12, 15, 17, and 20 pitches. LO Bold Proportional Spacing: plus condensed. LO Super Focus: 10 and 17 pitches. LO OCR-B: 10 and 17 pitches. LO ITC Souvenir: 10 and 17 pitches. Italicization, emphasis, and enhancement electronically possible for all the above. True superscript/substring
Character sets: ASCII standard. IBM graphic. Italic 96 user-defined characters. 13 language character sets
Interface: Industry-standard parallel. RS-232C (optional)
Input Buffer: 8K standard
Graphic Resolution: Up to 360 x 360 dpi
Copy Printing Capacity: Original and two copies with copy control lever
Paper Width/Weight: 5 top 10 inches/12 to 22 lbs. 6.5 to 8.5 inches with sheet feeder
Dimensions (W x H x D) 390mm(15.4"x140mm(5.5")x280mm(11.0")

SPECIAL OFFER


SAVE 29.00

FREE PRINTER STAND

FREE BBC CABLE
FREE 200 SHEETS OF PAPER

When you buy a Panasonic KX-P1081.

The faster and enhanced KX-P1081. 120 cps in draft mode. 24 cps in NLO mode. Fully Epson RX80 and IBM Matrix and Graphics Printers compatible. Standard friction and tractor feed. Operator accessible print mode switch. Standard 8 bit parallel interface. RS232 interface is optional. £156.00



SPECIAL OFFER



PRINTER STAND

Fits nearly any width of printer. Allows paper storage and gives ideal viewing position. Can also be used for computers and monitors. Steel construction prevents bending or buckling. 8.00



APEX HOUSE
BLANFORD ROAD
NORWOOD GREEN
SOUTHALL
MIDD UB2 4HD
☎ 01-574 5271 or
☎ 01-571 5938
Telex: 25247 Telex G.attn TIL
Fax: 01-547 4326

You can purchase any of the items listed. All you have to do is write your requirements on a sheet of paper, and we will despatch your goods within 24 hours, subject to availability. Please add the following amounts for Postage and Packing.

Items below 10.00	add 1.50	Items below 50.00	add 2.50
Items below 100.00	add 3.50	Items over 100.00	add 8.00

[UK Mainland only] All prices exclude VAT. Please add 15% VAT to all orders. Prices correct at time of going to press but subject to change without notice. Please make cheques payable to: **TWILLSTAR COMPUTERS LTD.** Access/Visa Card Holders: Welcome. VISIT OUR MEGA-COMPUSTORE OPEN 9am - 6pm Monday to Saturday

SPREAD THE COST
Use our low cost credit facilities
Typical APR 36%.
We are authorised credit facilities

If you want to emulate Patrick Moore using Mike Cook's theodolite and calculation program from our April issue, it will help if you first become familiar with the night sky. Now you can view it from the comfort of your own home with this program which projects the relative positions and shapes of 32 major constellations.

Enter the listing and ensure you've made no typing errors using Get it Right! When run, the program produces a map of the sky at night with individual stars presented at roughly the correct relative magnitudes.

The individual constellations — shown below — are named and highlighted in turn, and you can move to the next one by pressing the spacebar or just allowing the program to cycle through changing once every 10 seconds.

The compass points at the top, bottom and sides of the display refer to the direction of the horizon.

The view given is of the winter sky, although the majority of the constellations can be seen at all times of the year. It would be a fairly simple task to incorporate constellations that are only on view during summer with time/date and your position input to provide the correct display.

So now you can star gaze without getting cold.

Heavenly pastime

Bernard Mitchell
helps you find your way round the sky



Listing starts on Page 145.

Andromeda	Coma Berenices	Orion
Aries	Corona	Perseus
Auriga	Crater	Pleiades
Bootes	Draco	Puppis
Cancer	Eridanus	Pyxis
Canes Venatici	Gemini	Sextans
Canis Major	Hydra	Taurus
Canis Minor	Leo	Ursa Major
Cassiopeia	Leo Minor	Ursa Minor
Cepheus	Lynx	Virgo
Cetus	Monoceros	


Constellations highlighted by the Night Sky program

PROCEDURES

- delay** Wait for 10 seconds or until spacebar pressed
- flash** Flash constellation and name on screen for 10 seconds
- init** Initialise variables and draw main screen
- name** Display constellation name on the screen
- reloc** Move the program down in memory to allow use of Mode 1
- t** Print a string at a graphics position

MAIN VARIABLES

- A%-F%** Character definitions for six levels of star magnitudes
- M%** Basic MOVE command coded as a single digit for use in VDU statement
- N%** Number of constellations
- AS(I)** Name of each constellation and appropriate function

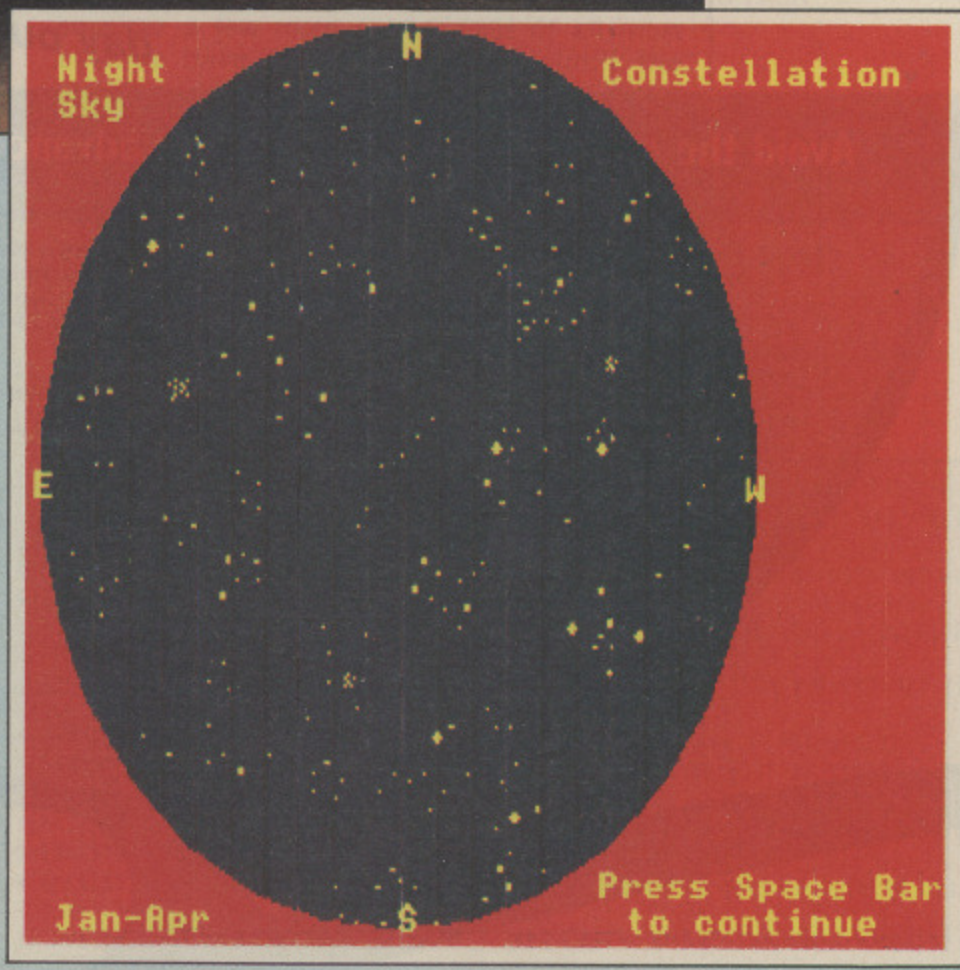

ACORN IN ACTION

A totally new experience for show visitors

at the
**Royal Horticultural Hall,
Westminster, London SW1**



10am-6pm Friday May 13
10am-6pm Saturday May 14
10am-4pm Sunday May 15

You'll find the very latest software and peripherals for the complete Acorn range at the Electron & BBC Micro User Show. But this time there'll be so much more to enjoy. Acorn In Action will demonstrate some of the truly amazing projects currently involving the machines...

- SEE** ★ A spectacular laser light show controlled by a BBC Micro. (Saturday only)
- ★ The research work on the BBC Micro that has helped to bring new hope to sufferers of the eye disease glaucoma. (Friday and Sunday)
- ★ A program developed by an amateur astronomer to locate distant galaxies. (Saturday and Sunday)
- ★ The Beeb system being used by doctors at Guy's Hospital to provide a breakthrough in the treatment of arterial disease. (Saturday and Sunday)

PLUS watch your own heartbeats displayed, measure your manual dexterity and hear your own voice backwards – all courtesy of a BBC Micro.

Take your seat in the Archimedes Demonstration Theatre run by Acorn's own experts. Thirty minute special introductory courses to the new machine will be held on the hour, every hour throughout the three days. Price just £1.

It all adds up to a fantastic day out for the whole family!

Avoid the queues! Get your ticket in advance – and SAVE £1 A HEAD!

Post to: Electron & BBC Micro User Show Tickets, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.



Royal Horticultural Hall
Westminster
London SW1
May 13-15, 1988

Advance ticket orders must be received by Wednesday, May 4, 1988.

Admission at door: £3 (adults), £2 (under 16s)

Please supply:

— Adult tickets at £2 (save £1) £ _____
(Order four adult tickets, get the fifth FREE!)

— Under 16s tickets at £1 (save £1) £ _____
(Order four under-16s tickets, get the fifth FREE!)

Total £ _____

I enclose a cheque made payable to Database Exhibitions

Please debit my Access/Visa

card no:

Expiry date: /

Name _____ Signed _____

Address _____

Postcode _____

A366

PHONE ORDERS: Ring Show Hotline: 0625 879920
PRESTEL ORDERS: Key *89 then 614568383
MICROLINK ORDERS: Mailbox 72:MAG001

Please quote credit card number and full address



It's a challenge!

OVER the last couple of months we have been outlining a problem for you to solve – together with some hints on how to go about writing a program to give the required answer.

I asked you to test out a roulette gambling strategy: To bet on the red numbers and, if you lost, to keep doubling the bet until you won. Many of you will have written your own routines to solve the puzzle, and mine is shown below. It follows the method described last month, but is just one of the infinite ways that you may have approached it.

If you've solved the problem in a completely different way we'd like to see it, so send it to Letters, The Micro User, Europa House, Adlington Park, Adlington, Macclesfield, SK10 4NP. We'll give £10 for the best solution that matches exactly the problem as it was defined in the March issue of The Micro User.

HAVE kept the program to solve the gambling problem simple. When run, an evening at the roulette table just flies by. Line 60 defines how much money you have in your pot, with line 70 setting the size of the initial bet. If you like, you can put input statements in both those lines to vary the amounts when run. We can keep track of the largest bet we have placed with the variable **LBET**.

Next we read in all the red numbers from the DATA statements into the array **RED()**. The casino might close before we are through so the total number of spins of the wheel possible is tracked in the variable **TSP**. Similarly the number of spins actually used is recorded in **SPIN**. A logic variable **BUST** indicates if we have enough money to cover our bet and line 170 sets up the victory pot – the amount we have when we decide to give up for the night.

So now we enter the casino and start our first cycle of bets. Line 300 generates the random number as a result of spinning the roulette wheel. Lines 310 to 340 see if we have won and then we must take the appropriate action if we have won or lost. If we have won we add our winnings to our pot and end the current cycle of bet doubling. If we have lost we need to double our bet if we have enough money – if not we are bust.

Then if the casino is still open we can place our

bet again. After a winning cycle of bets we decide whether to call it a night or carry on – this is done in line 430.

So there you have it: You can see whether you will win. I made an adjustment to the program to run it continuously – keeping a count of how many nights I won and lost – and I kept it going overnight. It only clocked up 3,115 wins and 2,674 losses after 10 hours so I transferred it to the Archimedes where in seven hours it clocked up 17,753 nights of victory and 14,326 nights of losing. This represents just over 87 years of gambling every night, with winnings of just under £4,000 a year.

However, before you rush off to win a fortune consider a few more points. First of all most casinos have house rules which limit the maximum and minimum bets and some tables limit the number of times you can double your bet. In addition you will have to subtract your entrance fee and any drinks you buy from your winnings. Some casinos might not get through as many as 200 spins a night, so you will have to change that.

Finally, it is rather a slow and boring way to make money. It's much better to hone your programming skill and make that pay. So are you ready for next month's Programmers' Challenge?

In the third part of this series Mike Cook offers his solution

```

10 MODE 7
20 PRINTAB(0,3);"Programmer's Challenge"
30 PRINT"Number 1"
40 PRINT"The ROULETTE Wheel"
50 PRINT"By Mike Cook"
60 POT=100
70 FBET=1
80 LBET=0
90 REM NOW INITIALISE RED NUMBERS
100 DIM RED(18)
110 FOR A=1 TO 18
120 READ RED(A)
130 NEXT A
140 DATA 15,4,2,17,6,13,11,8,10,24
150 DATA 33,20,31,22,29,28,35,26
160 VICP=POT*2
170 TSP=200
180 SPIN=0
190 BUST=FALSE
200 REM NOW TO ENTER THE CASINO
210 REPEAT
220 REM A NEW CYCLE OF BETS
230 BET=FBET
240 REPEAT
250 SPIN=SPIN+1
260 PRINTTAB(0,8);"SPIN Number ";SPIN
270 PRINT"Bet is £";BET;SPC(3)
280 IF BET > LBET THEN LBET=BET
290 TSP=TSP-1
300 S=RND(37)-1
310 WIN=FALSE
320 FOR A=1 TO 18
330 IF S=RED(A) THEN WIN=TRUE
340 NEXT A
350 IF WIN=TRUE THEN PRINT" WIN " ELSE
PRINT"LOSE"
360 IF WIN=TRUE THEN POT=POT+(BET *2):
GOTO 400
370 REM WE MUST HAVE LOST TO BE HERE
380 BET=BET*2
390 IF POT > BET THEN POT=POT-BET ELSE
BUST=TRUE
400 PRINT"You have £";POT;SPC(3)
410 UNTIL(WIN OR BUST OR TSP=0)
420 REM.DO WE EMBARK ON ANOTHER ROUND?
430 UNTIL BUST OR (POT>=VICP) OR (TSP=
0)
440 PRINT"The largest bet placed was £
";LBET
450 END

```

The myth maker

In the February issue of *The Micro User* Peter Gerrard discussed the sources of inspiration for adventures and mentioned that a great many games obviously have their origins in books. I've written several adventures and although the written word is a good source perhaps the unwritten word is better.

The plot of the typical adventure can probably be condensed like this: You journey from A to B and bring back object C by vanquishing the evil tyrant D.

Stories from books can be altered to suit the scene set by the adventure. For instance, a novel set in wartime Germany in which the hero is fleeing from Nazi stormtroopers can look altogether unrecognisable if it is transferred to a fantasy land where the heroine is fleeing from a horde of evil orcs. Only the names are changed, and a discovered pistol merely becomes a discovered scimitar.

If I can be said to have a favourite writer then it would have to be James Joyce. His masterpieces are, however, probably impossible to transform into a plot for an adventure and I doubt whether even the Archimedes would be able to handle the vocabulary required for a game based on *Finnegan's Wake*. Therefore I have to look elsewhere for ideas.

For my follow up to *Wychwood* I chose to write a story which was inspired, in a way, by the folklore connected with the prehistoric sites so abundant in the West Country. I have long been interested by the great stone circles which still stand in many parts of the country, and a visit to the Rollright Stones on the Oxfordshire/Warwickshire border provided me with a legend on which I could build a fairy story of my own.

A legend common to many standing stones tells that they were once living human beings who have been turned to stone for some reason. The Rollright tale concerns an ambitious king who, marching north, met a witch who challenged him to take seven strides forward. If he could see the village of Long Compton then he would become King of England. However, a hillock prevented him from seeing the village, so the witch turned the king and his men into stone and herself into an elder tree.

It is said that Mother Shipton was the witch who challenged the king. She was a 16th century prophetess who, after her death, came to be known as a legendary witch. She was associated with Shipton-under-Wychwood about seven miles south of Rollright.

In *The Nine Dancers* the legend connected with



the stone circle tells that a sorceress was outraged at not being invited to the wedding of a princess and a prince from a neighbouring kingdom. She turns the princess and a few others to stone.

When the prince hears of this he is heartbroken but a wizard informs him that one day she will be brought back to life. Turning the prince into stone to await that day the wizard transforms himself into a tree so that he may watch over the princess to ensure that no harm should befall her.


WRITING *The Nine Dancers* necessitated a great deal of research into the folklore surrounding the great standing stones and burial mound of the prehistoric Beaker People.

The first location in the game contains a signpost which points to Wychwood — seven miles distant. Near the end of the adventure the player climbs a hill to find a single standing stone — the prince. That stone would certainly be very similar to *The King Stone* at Rollright — pictured above.

The next adventure — *The Puppet Man* — was inspired by a single word, marionette. When I heard someone describing marionette shows I knew that it would make a nice backdrop for an adventure game. In that story — set at the end of the last century — it is rumoured that the marionettes belonging to a famous puppeteer are actually living creatures.

When the main one disappears the people are

Geoff Larsen reveals the inspiration behind his top selling adventures

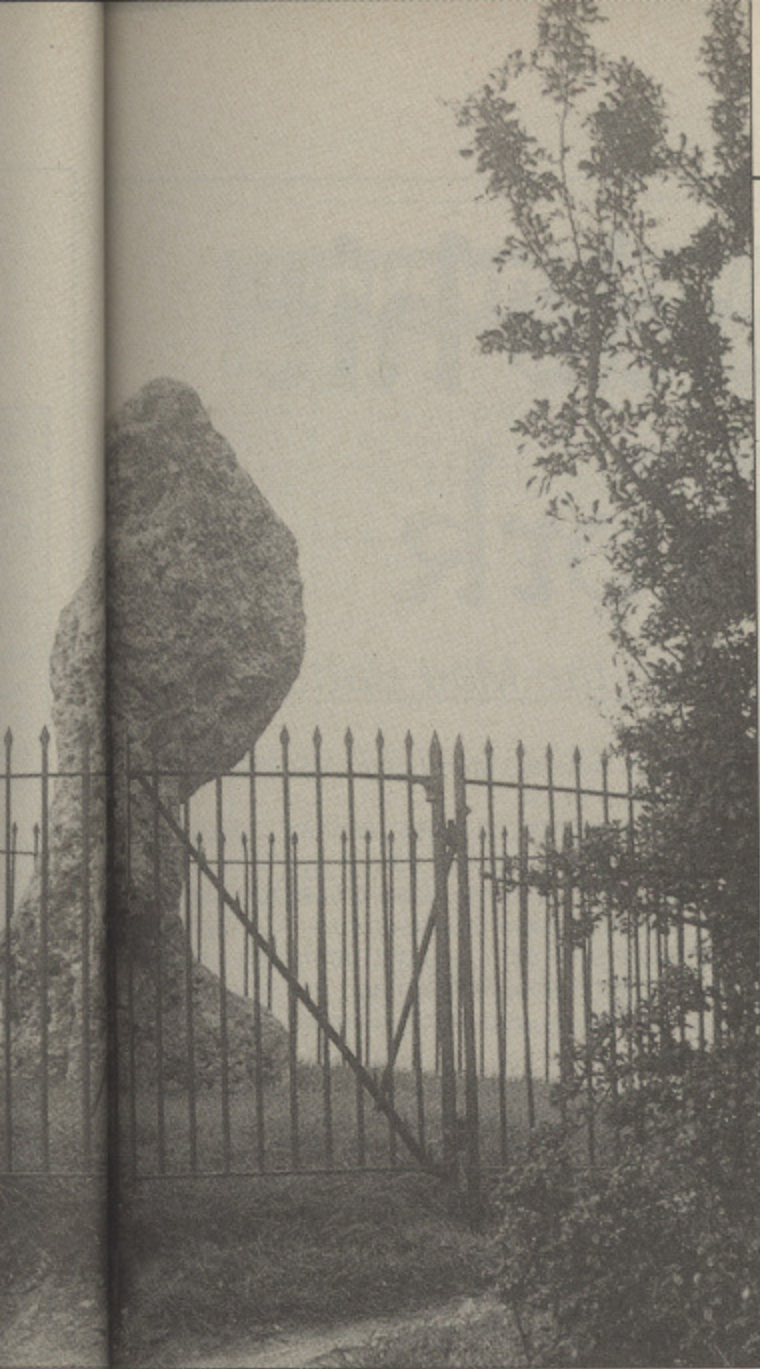

which can give birth to further ideas. From this mixture I will prepare the working story which is finally coded into the computer and realised as the working adventure.

Now, yet more changes may be made in order to make the game more presentable on the screen. Testing it may reveal untapped avenues which are then incorporated. Knowing the story is definitely a disadvantage when it comes to testing the game.

Those unfamiliar with the correct procedures may be side-tracked by things which I had not envisaged as being important. Therefore the comments made by those to whom I have sent my pre-production version of an adventure are most valuable and from their remarks I may change the emphasis from one location or object to another and add more messages.

Finally, the adventure is finished. From a single word or phrase like *The Puppet-Man*, or a childhood fantasy such as *Hex*, comes an adventure game. People seem to enjoy these non-violent escapades.

I AM thrilled to have been asked to write a fantasy for Robico. Its adventure games are the pinnacle of BBC Micro software and its prowess in programming means that I will not be restricted in the amount of text. I'm no programmer, and up till now have had to rely on Gilsoft's *The Quill* to write my adventures.

I always like to have the map of the landscape drawn out before I start to enter such things as the vocabulary or object descriptions into the computer. The adventure should have a solid and believable story before I even begin mapping.

I believe it's important that the vocabulary understood by the game is sufficiently extensive so that the stumbling block is purely what to do, not which verb to use. I very much enjoy carrying forward themes from one adventure to another and running jokes can also introduce a feeling of familiarity to the adventurer and make for a sense of continuity.

I ensure that none of my adventures recognises any bad language. While it may be humorous to receive a rebuke from the micro if some rude words are entered, I feel that it could encourage some younger people to experiment in order to discover just which ones are recognised. To me that would be to promote a negative aspect.

One thing which has surprised me, however, is that the vast majority of adventurers are not youngsters. And a great many of them also enjoy doing crosswords. It is almost certainly true to say that adventurers are thinkers.

While talking with Rob and Mike O'Leary of Robico I was struck by the fact that they agreed with me that the adventurer should not have to think: "What is the solution to this puzzle?" Instead, it is preferable for the adventurer to feel that he or she is part of the story and wonder, for example: "How can I distract that dog?"

Merely considering an adventure to be a puzzle detracts from the feel of the game. With the sense of familiarity, depth of background and a strong plot line, the adventurer can really be there.

It is almost certainly true to say that adventurers are also thinkers

satisfied that the rumour is true and that the creature has decided to leave. In a dream Mnemosyne, mother of the Muses, offers to help you find the puppet if you, in turn, will help some of her daughters – Terpsichore (dance), Thalia (comedy) and Erato (love poetry).

The adventure is full of pantomime and nursery rhyme characters including Harlequin, Columbine, Pierrot, the Butcher, the Baker and the Candlestick-maker.

Characters and situations from my earlier games metamorphose into others in later ones. Thus a white horse may become first a chalk hill figure and then an inn and next time the crest of a wave.

The theme of my latest adventure, *Hex*, concerns witchcraft in a Cornish village in the year 1902. Like all Larsoft games the story may be described as being moralistic – I like to provide a sting in the tail of each story. In *The Nine Dancers* the ending veers first one way and then another. In *The Puppet Man* you may wonder whether the marionette really is alive. And in *Hex*?

The most popular game to date is still *Wychwood*, possibly due to the wonderfully gloomy cover illustration drawn by Robin Challenger.

Once I get an idea for a story I spend a good few months researching reference books in order to acquire a solid framework around which to introduce the characters, objects and locations. Further research may show how I can incorporate ideas from previous Larsoft games as well.

The original idea is then developed into a story

B B+ M  

Now Suds hit New York

Into the world of fantasy with the Mad Hatter



In the March column I mentioned a pre-production cassette of the sequel to Riverdale's Suds called, appropriately enough, **American Suds**. Flushed with success after your triumphs in Suds, you find yourself at an airport. Now you must find your way to New York, and then survive in the environs of something horrendously reminiscent of Dallas.

The first three problems you meet involve boarding the plane, surviving and leaving it safely as it circles New York. Given the humour, you won't be surprised that airport security no longer requires the presence of metal detectors. On the other hand, customer security most certainly requires an understanding of effective defenestration techniques.

I don't want to give too much away, but once again this quilled adventure offers good value for money. If you enjoyed Suds, you'll find the sequel provides similar entertainment. American Suds is available on cassette from Riverdale Software,

95 Printon Avenue, Manchester M9 3JW for the modest sum of £4.

Final thoughts on **Elite**. Having mixed my playing sessions between a borrowed Master and my BBC B with 6502 second processor combination, I have achieved Elite status – 24 *Right on Commanders* in all – without doing the second mission. Mind you, if you need my help in the second mission, you don't deserve to be Elite anyway.

New from Topologika

I mentioned last month that the new software house Topologika had re-issued some Acornsoft classics and you may have seen my review of one of them, **Kingdom of Hamil**, in that issue. I now have further information that will whet the appetite of anyone contemplating multiple purchases of **Philosopher's Quest**, **Countdown to Doom**, **Kingdom of Hamil** and **Acheton**.

The discs cost £9.95 individually, £15 for two, £20 for three, and if you order all four the cost is £22 – quite a saving. Available from Topologika, P.O. Box 39, Stilton, Peterborough, PE7 3RL. All will run on BBC B, B+ and Master. Topologika is preparing Compact versions, too.

I found it supremely ironic that, having regaled readers with a fairly detailed solution to **Philosopher's Quest** in recent columns, it should once again be readily available. However, the new version is half as large again and, says Peter Killworth, "is almost exactly the version of the Cambridge IBM 3084, which I cut down to fit the BBC Micro".

Philosopher's Quest revisited

Old hands will recognise right from the start that there have been changes. Admittedly you begin in the shop, and the familiar keys and aqualung are there – but that's all.

You are given the added information that the aqualung works automatically on contact with water. You are also faced with a teabag, a piece of curled up sausage and a nice soft cushion. The rod has gone, and the puzzle it used to solve in the corridor has likewise vanished.

I don't want to spoil things, but I think a brief account of what I found on a preliminary reconnoitre will not go amiss.

I decided first to see how the poor old lady, drink problem and all, was getting on. The puzzle chain is slightly extended and it is now a little

Assumptions can slay you

*They say that in spring a young man's fancy turns to thoughts of love. What happens to middle-aged crackpots is more like a dose of nostalgia. To date, the fewest queries I have had on a Level 9 adventure undoubtedly concern **Adventure Quest**. I suspect that many gave up on it too early. Even I failed to get maximum points – 5375 out of a possible 6000 – and awarded myself a must do better comment as well.*

I liked the scenario of the game very much. It involved finding a Talisman and then taking it twice through the four natural elements of earth, air, fire and water before defeating the evil entity Agaliarept.

*I enjoyed playing it tremendously, even though I had difficulties at times. Because it was a sequel to **Colossal Adventure**, the starting locations were the same but the scene was set many centuries later, with all the changes you might expect.*

*The biggest problems for me came early on in the adventure – in the desert of all places: I made too many assumptions. This is something that often troubles adventurers when we add two and two together and sometimes expect the answer to be ten. I'll illustrate this very simply: In the desert I came across a giant Sandworm that killed me. Since I have read all Frank Herbert's *Dune* novels I thought I knew how to deal with Sandworms.*

I assumed that they were a means of travelling and spent some time looking for the hooks that worm riders use and, failing in that quest, I spent ages entering permutations of RIDE WORM and similar instructions.

What Pete Austin actually wanted me to do instead was to adopt the broken rhythm walk of Herbert's desert Fremens and lead the worm to an object that had to be destroyed. This is a perfect lesson in how to avoid too many assumptions when adventuring.

ADVENTURE QUEST LOGICAL MAP

Room	Description	Move	Result
22	Edge of fertile land: Desert N, Mt. just visible N,N,N,W,N,LOOK,E,E,E to 31	S	21
		N	23
23	Southern edge of Desert	S	22
		N	24
24	Trackless Desert	S	23
		2 x E	25
		W	Repeats
		N	26
25	Trackless Desert beside Black Pillar WHITE DOT	2 x W + 2 x S	23
26	Trackless Desert	S	24
		W	27
27	Trackless Desert	N	28
28	Trackless Desert above deep Canyon Oasis at foot of Southern cliffs	E	29
29	Trackless Desert S of Canyon	E	30
30	Trackless Desert S of Canyon: outcrop E Flat topped Pyramid: SPHINX Moves noted at 22 make WORM devour Sphinx	E	33
		U	31
31	Top of Pyramid: SNAKES and Temple (Play PIPES)	D	30
		IN	32
32	Inside roofless Temple: Priestess requests SUN-DIAL Getting S-D here brings RUBY in return	OUT	31
33	Rocky outcrop overlooking pyramid Path N and D into chasm	N	34



PROBLEM CORNER

How can Nick Richardson stop the cranes squashing him in the Missile Factory Sector 1 of Codename: Droid?

HALL OF FAME

William Hadden of Co.Down has sent me a meticulous solution to *Thunderstruck*, and Ian Weston one for *Sorcerer of Claymorgue Castle*. So that's two more adventures that I can help you with.

more powerful. On the other hand, the beach area is much more fascinating than before and a nicely balanced puzzle awaits the unwary. It caused me to kick the bucket a couple of times before I finally weighed it up.

The acid test where any re-issued adventure is concerned is: Can I still recommend it to newcomers? The answer here is a decided yes. But there is more, too. If you have the old version of

Philosopher's Quest, this enhanced one is different enough to make it a new game.

Recent advice given in this column will help you, but not spoil the game for those who have read it. Also the disc provides online help so, if you get stuck, the answer is available.

Next month, I hope to take a closer look at the re-issued **Countdown to Doom**, again by Peter Killworth. Until then, happy adventuring.

Hatter's Helpline

Some good news for Master owners who have laid aside their versions of **Acheton**: Two readers have sent advice, and here is a summary of what Messrs Hickman and Smith wrote:

Chain the Convert program from the Welcome disc, pressing Control+Break when instructed. Put the Acheton program disc in drive 0 and press Shift+Z+Break, holding the Shift and Z keys down until the title page loads.

The game can now be played as normal except that you can no longer save your position on drive 0 - it is now classified as read-only.

Robin Smith adds the following tip: Copy all existing saved positions to drive 2, but in 80-track mode, give a filename of four or less letters then, when prompted for a filename, include the drive specified. So 2Ach1 would indicate the first position saved on drive 2.

Oh dear, a lot of you are still having **Hobbit** problems. In the Elven King's Halls do not abandon Thorin however irritating he is. Make him get into a barrel and once the butler has thrown it

through the trapdoor, jump down yourself while wearing the ring. You need his grandad's key, and Thorin won't give it up.

Tony Marter has the solution to R. Chapman's **Castle Dracula** problem: LIGHT MATCH is the correct input. Why can't we have a universally agreed way of creating light. FIAT LUX maybe?

A broke - and boozed-up - Hermes staggered in from Berlin recently with a list of games that run on the Master 512. Infocom: **Zork I, II, and III**, **Leather Goddesses of Phobos**, **Ballyhoo** and **Suspended** - this last one runs on MSdos 2.1 only.

Other adventures for the Master 512 are: Simon and Schuster - **Star Trek: The Promethian Prophecy** and Broderbund - **Where in the World is Carmen Sandiego** and **Where in the USA is Carmen Sandiego**. Hermes wonders if anyone else has the Star Trek game: He's stuck, and there's no published clue sheet.

By the way, it is rumoured - with some authority

Turn to Page 44 ►

INTEGRA-B

MOUSE DRIVER
DATE TIME
MULTIPLE WINDOW MANAGER
EXTENDED OPERATING SYSTEM
SELECT START-UP CONFIGURATION

REAL TIME CLOCK
BATTERY FOR ALL RAM & CLOCK
64K RAM
SHADOW RAM
SYSTEM BUFFERING

UP TO 128K RAM OR ROM
EASY INSTALLATION

THE ONLY SINGLE BOARD EXPANSION WITH ALL OF THESE FEATURES AND FULLY INTEGRATED MANAGEMENT

CONFIGURABLE FOR PRINTER BUFFER
COMPATIBLE WITH SECOND PROCESSOR DFS & ADFS

APPOINTMENTS MANAGER
AUTO RUN BASIC PROGRAMMES AT POWER-UP

Computech

The Garth, Hampsfell Road, Grange-over-Sands, Cumbria, LA11 6BG Telephone: 044 84 4604

MICRO MEDIA Computer Supplies Ltd.

5 1/4 Unbranded Discs

	25	50	100	250
SS/DD	9.30	18.40	34.60	73.60
DS/40T	10.40	19.60	36.30	76.25
DS/80T	12.20	23.10	43.10	90.85
DS/HD PC AT's	39.90	71.45	133.55	293.25

5 1/4 Coloured Discs

DS/40T	12.45	23.55	39.95	91.50
DS/80T	13.45	25.40	47.40	99.95

5 1/4 Reversible

2 Index Holes & Notches

DS/80T	15.50	28.50	55.00	125.00
--------	-------	-------	-------	--------

	10	20	50	100
DS/DD	11.90	22.90	54.55	104.35

5 1/4 Branded MICRO MEDIA Discs

SS/DD	6.40	12.10	28.30	51.70
DS/40T	7.50	14.15	33.15	61.30
DS/80T	8.50	15.95	36.25	71.25
DS/HD PC AT's	17.90	34.30	81.20	149.80
REVERSIBLE	9.75	18.50	43.85	81.50

All discs supplied are with labels 5 1/4" write protects, envelopes & hub rings. 100% certified error free lifetime guarantee.

3 1/2 Branded MICRO MEDIA Discs

SS/DD	13.70	26.90	64.40	122.60
DS/DD	14.90	28.60	68.20	130.50
DS/HD	38.95	74.25	176.80	327.80

Printer Ribbons

Price each Ribbon	2	6	12
Acom Ink Jet	2.79	2.65	2.45
Acom AP100	2.85	2.65	2.45
Centronics GLP	3.65	3.45	3.15
R, BL, GR, BR, Y	4.65	4.40	4.00
Canon 1080/1156	2.99	2.85	2.70
R, BL, GR, BR, Y	4.95	4.65	4.25
Citizen 120D	4.70	4.35	4.15
Epson MX FX/RX80 FX800	3.35	3.20	3.05
R, BL, GR, BR, Y	4.70	4.45	4.25
MX100/FX1000/FX105	3.90	3.70	3.50
R, BL, BR	4.95	4.70	4.50
LX80/86, GX80	2.80	2.65	2.40
R, BL, GR, BR, Y	3.65	3.45	3.30
EX800	5.98	5.65	5.20
Juki 6100 MS	2.85	2.70	2.60
Kaga KP810/910	2.99	2.85	2.70
R, BL, GR, BR, Y	4.95	4.65	4.25
Panasonic KXP	4.65	4.40	4.20
R, BL, GR, BR, Y	6.50	6.20	5.85
Shinwa CP80MS	4.10	3.85	3.55
Star NL10	5.25	4.95	4.70
R, BL, GR, BR, Y	6.15	5.85	5.55

Please mix colours and types for best prices.
R = Red, BL = Blue, GR = Green, BR = Brown,
Y = Yellow

If the ribbon you require is not listed please let us quote.

Computer Paper

Size	Weight	1000's	Price per box
Plain fanfold, micro perf edges			
11x9 1/2	60	2000	14.50 13.90 12.90
11x9 1/2	60	1000	9.50 - -
11x9 1/2	80	2000	19.75 18.10 16.75
11x9 1/2	80	1000	11.90 - -
EXACT A4			
11 3/8 x 9 1/2	70	2000	20.50 12.85 18.30
	90	1000	13.90 12.85 11.90

Computer Labels

Price per 1000	1000	3000	5000
Continuous fanfold, sprocket fed			
70 x 36 2 1/2 x 1 1/2	4.85	3.85	4.30
89 x 36 3 1/2 x 1 1/2	5.35	4.50	4.10
89 x 49 3 1/2 x 1 1/2	7.50	6.60	5.90

Please state no. of labels across sheet (1, 2 or 3)

Disc Storage Boxes



Price each	1+	3+	6+
MD 120 5 1/4 x 120	11.90	11.30	10.75
MD 100 5 1/4 x 100	9.90	9.40	8.95
MD 50 5 1/4 x 50	7.50	7.10	6.75

Printer Stands

Price each	30.50	28.50	26.95
Space Saver 80 col			
132 col	35.50	32.90	31.25
Coated Wire 80 col	13.70	12.75	11.85
132 col	15.70	14.60	13.60

Swivel Bases

Price each	12.90	11.75	10.90
12" 55 x 280 x 260 mm			
14" 55 x 355 x 320 mm	14.90	13.55	12.75

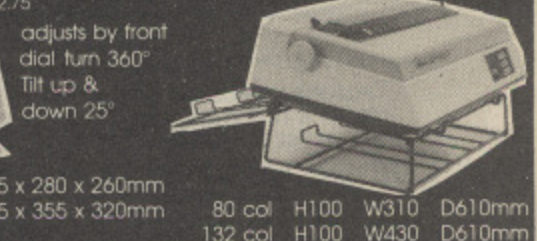

MICRO MEDIA - MICRO MEDIA - MICRO MEDIA - MICRO MEDIA - MICRO MEDIA - MICRO MEDIA -

Your technical questions
answered by MIKE COOK

PROBLEM SOLVED

Having a ball

COULD you please tell me how to convert the two signals produced by my Marconi trackball into left, right, up and down? I do have the Control rom, but would like to create software of my own.

— **Mark Taarkard, Shipley, Bradford.**

● There are many ways to do this, and most have been covered in past *Body Building* articles. The January 1985 issue of *The Micro User* showed how to convert the signals into an analogue signal suitable for putting into the joystick port, and that year's February magazine showed how to connect it to the user port and do the conversion in software.

The July 1986 issue showed how to make the trackball signals compatible with the AMX mouse, so you could use either software.

BBC Micro radio

I WOULD like to interface my BBC Micro to a dual channel radio control transmitter. My idea is to send analogue signals into it in place of the two existing joysticks.

Have you published any suitable D to A circuits as part of your *Body Building* course? If so can you tell me which issue it was in and whether one can still buy a kit of parts? — **Chris Houston, Frensham, Farnham, Surrey.**

● The October 1984 *Body Building* contained an 8 bit digital analogue converter that plugged into the user port. The kits are still available from Musbury Consultants at £20.60 for the kit or £26.85 assembled plus £9.99 if you want the connecting cable.

However, these produce an output between 0 and 5 volts and it is unlikely that this would be suitable for direct connection to your radio control system, as the pots in it may be acting as a pulse divider.

What you have to do is to investigate, with an oscilloscope, the signals and DC voltages around the pot. Then try to replace this with a simple operational amplifier and control voltage, as you'll need this to convert the 5 volt signal to the correct level.

Also make sure that the earths of the system are at the same potential. Japanese electronic circuit designers are well known for unconventional approaches that save money but make any change very difficult.

Old drives with new

I HAVE recently acquired an old Tandy TRS-80 disc drive and was wondering if it would be possible to interface it to a BBC B and a Mitsubishi disc drive in order to get a double 40/80 disc drive. I have no knowledge of electronics at all and any help would be much obliged. — **Damian Zarattini, Horsham, West Sussex.**

● The drives used with the old TRS-80 computers were normally 35 track units. Some would extend up to 40 tracks but others would not. If they will not then you might have to write a special 35 track format program or modify an existing one. It is very unlikely that they are 40/80 switchable drives.

It is quite simple to fit one of these to your existing system. First of all get a cable with two drive connectors and replace your original cable. Look on the electronics board of the new drive for a set of links. One will be set to make the drive look like drive 0 — change the links to the drive 1 position.

Also you will see a flat pack of terminating resistors close to the edge connector: These must be removed from one drive if you have two. If you can't cope with all that, you could ask a local dealer to do it for you.

Impossible corruption

I HAVE recently been inspecting my issue 7 BBC B's circuit board and have found a set of 10 pins labelled PL14 in the bottom left hand corner. Could you please tell me what they are for? Also there are two rows of empty holes at the right of the keyboard. Are these any use?

The reason I have been looking is that the "impossible" happened: The micro corrupted a write-protected disc. After putting the disc in the

On the agenda...

- Converting a trackball
- Interfacing to a transmitter
- Connecting an alien drive
- Disc corruption problem
- Cure for pink displays
- Discs and magnetic fields

Turn to Page 48 ►

Turning the power off with the disc drive can damage the disc

◀ From Page 47

drive, I tried to boot it up. There was a long pause while the Drive motor went round, and then the message *Drive fault at 00/00* appeared.

After checking connections I tried to catalogue the disc. All then appeared well until I found that the disc was corrupted. Then next time exactly the same thing happened except that I could not get the Drive to catalogue at all.

By chance I have discovered that pushing the left hand corner of the motherboard – by the disc drive port – up, the fault appears to be cured. At present the board is held up by a rubber band.

Naturally I thought it must be a loose connection on the motherboard, but I can't understand why the disc was corrupted. – **K.West, Bradford, West Yorks.**

● *Acorn's original intention was to have a cartridge socket on the left hand side of the keyboard: PL14 is where the upgrade kit would plug into the main board.*

The holes on the bottom of the keyboard allow you to insert links to set up different delay times for slightly faster disc drives. The increase in speed however is not very great and in my opinion can cause more trouble than it is worth.

However, some of these pins allow you to change the screen mode at switch on as well as making a Shift+Break action occur with just a Break. This is useful to get a program to boot up automatically on power on. See the Advanced

User Guide for more details.

It is not possible for the disc controller to write to a protected disc. The write protection system is in the controller and not the drive – but that does not mean that it cannot get damaged. Turning the power off with the disc still in the drive can damage the disc: As the power is removed the collapsing field in the disc's read/write head can cause a magnetic blip on the disc.

This can also happen when you have intermittent connections to the drive, especially to the write data line. In effect the intermittent signal is just like a real data signal.

Replay problem

AS I was trying to fit my new Replay under my ATPL rom board I had a few problems – mostly with legs dropping off. I managed to solder them back, only to find a connection has decided to remove itself from a certain little bit of plastic.

I will send that back, but my problem now is that my display has gone bright pink. What have I done? It still works.

The other strange thing is that just before it went pink it kept pressing the Break key all by itself. Please tell me what I have done and is it fixable? This pink is making me feel sick. – **Paul Bailey, London.**

● *Pink is a very strange colour to get on a moni*



tor, are you sure that it is not magenta? You do not say if the whole screen or just what is supposed to be white is affected by this malady. If it is just the white then I am sure that you are missing the green signal to your monitor. The most likely cause of this is a loose socket on the RGB output of your micro.

It is very unusual for a micro to press Break by itself. I can only think that when you replaced the cover you trapped the Break key and any pressing on the lid could cause the reset.

Taping the Compact

I HAVE a Compact and recently the Welcome software supplied with it began to play up. Soon after we got it I made a backup copy of the disc as advised in the manual. Then the original developed a fault, refusing to load properly. At the same time some of my own discs were mysteriously wiped clean.

I suspected dirt or mains hum as the culprit and have since kept all my discs in a dustproof metal box well away from the micro. I made another copy of the disc from the backup and all was well for a couple of weeks. Then recently both the copied disc and the original broke down at once. All my other discs are ok but this one seems to be losing data in little bits. Only the main directory can be catalogued now, the rest of the disc being

full of errors.

Can you suggest what my problem might be? As the micro is still under guarantee will I be able to get a replacement free of charge from the dealer?

Also as the Compact has no special tape port, can I connect a tape recorder via the RS232 port? Would I need an interface? How would I load and save programs in this way? — **Rhydian Blackmore, Llanwrda, Dyfed.**

● I strongly suspect that your problem is with magnetic fields. These can damage discs and cause the faults you describe. This could be because the read/write head has become magnetised and your dealer should be able to degauss it for you and may also be able to offer you another copy of the disc.

However, it is more likely that the problem is with your storage. Remember that magnetic fields are produced by things like loudspeakers, electric motors and small permanent magnets. The type used as memo holders are a particular menace.

It is also possible that your metal box is magnetised. Remember that steel does not protect against magnetic fields — it makes them worse.

The Compact can't be used with a tape recorder as there is no provision in the operating system software. It is the sort of interface that could be made but no one has yet done so. I suspect that this is because it would be of limited use as many tape games use programming techniques that would not work with the Compact.

Have you any hardware problems with your BBC Micro? If so, write to Mike Cook, The Micro User, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP, giving full details of your system and the problem. Unfortunately, Mike cannot send you personal replies, but as many questions as possible will be answered on the pages of The Micro User.

WATCHING YOUR BBC PROGRAMS ON TAXAN'S SUPERVISION 620 OR 625 IS A FEAST FOR THE EYES. BECAUSE THEY'RE PROFESSIONAL COLOUR MONITORS THEY GIVE YOU A BETTER QUALITY PICTURE THAN EITHER A TV OR MEDIUM RESOLUTION MONITOR. AND WITH THEIR SUPER HIGH CONTRAST TUBES (FOR SHARPER TEXT AND MORE VIVID COLOURS) AND FOUR SWITCHABLE COLOUR TEXT MODES, THEY MAKE EXCELLENT VIEWING. (HOWEVER IF YOU PREFER TO WATCH IN MONOCHROME ONLY, TAXAN HAVE A RANGE OF MONITORS - THE KX117, KX118 AND KX119). TAXAN ALSO OFFER TWO BBC COMPATIBLE DOT MATRIX PRINTERS, THE KP815 AND KP915. THEY'RE QUICK AND QUIET AND BOTH PROVIDE NEAR LETTER QUALITY. SO NOW YOU'VE SEEN OUR IMPROVEMENTS FOR THE BBC,™ GIVE US A RING. WE'D LOVE TO HEAR YOUR POINTS OF VIEW.

TAXAN
A KAGA COMPANY
PERFECTING THE IMAGE



TO FIND OUT MORE ABOUT THE TAXAN RANGE OF PRODUCTS, CALL US ON 0344 484646.



Cut price colours

Craig Wareham slaps on the paint with élan as he tries out a new art package

Product: *Arctist*
 Price: £19.95
 Supplier: Fairhurst Instruments, Dean Court,
 Woodford Road, Wilmslow, Cheshire SK9 2LT.
 Tel: 0625 525694

The pictures on the opposite page were produced by Craig Wareham and David Lear – both top-rank micro artists – using *Arctist*.

A RCTIST is the third painting package to be released for the Archimedes – ArcPaint being the first on the Welcome disc followed by Artisan from Clares, which was reviewed in the January issue of *The Micro User*. The main advantage of this new product from Fairhurst Instruments over the others is that artwork can make use of the 256 colours available in Mode 15.

The package is supplied on disc with a manual and function key strip. In addition to the painting software, the disc contains a program enabling you to use any drawing/sprite as a scrolling background in your own programs.

Before booting up it is necessary to ensure the machine configurations are suitable, and any changes must be made manually – this is in accordance with Acorn's policy, but doesn't conform with normal practice. The required alterations are simple but are hidden away on the third page and, if you haven't read the manual, it is easy to panic when the software won't run.


When these configurations are set and the program booted up the title screen appears showing the range of colours available and pressing a key takes you into the main program. You are presented with a clear screen with a pointer and menu bar – containing icons for most of the facilities available – is located at the top. A summary of less-used facilities available from function keys provided are shown in the panel. The menu bar can be removed and recalled using the middle – menu – button on the mouse. The left hand button is used to select and the right hand one is for cancel.

On the left of the menu bar is the palette icon, which, when clicked, presents the four hues of each of the 64 colours. Careful selection of shade can introduce mood and feeling into your work. By pressing the menu button while on the palette you move into freehand mode: Pressing cancel takes you back to the main menu.

The dripping tap icon represents the flood-fill operation but unfortunately there are no pattern fills and you can't fill one shade of colour on to another shade of the same colour.

There are three rubber band shapes – rectangle, ellipse and triangle – and each can be drawn outline or filled – toggled by the fill-on icon.

This is a very narrow set of options considering what the operating system can easily support: Arcs, segments and chords do not appear at all, while circles are relegated to a subset of ellipse

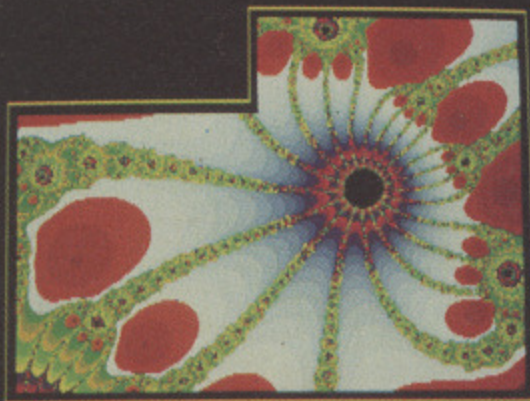

Arctist demo picture supplied with the package

Key	Function
Shift+f1	Display disc directory
Shift+f2	Format disc
Shift+f3	Save screen to memory
Shift+f4	Recover screen from memory
Shift+f5	Perform grey-scale screen dump
Shift+f6	Perform faded grey-scale screen dump
Shift+f7	Perform blocked grey-scale screen dump
Shift+f8	Perform black and white screen dump
Shift+f9	Toggle grid on/off
Shift+f10	Darken screen area
Shift+f12	Lighten screen area



A landscape demonstrating the Arctist spray can

which makes them very difficult to draw accurately.

There are two independent flip options – up-down and left-right – neither of which can be used in conjunction with a block move or copy. There is also a colour invert operation on a rectangular area.

The continuous line function is the most used in any art package, but unfortunately it is poorly implemented in Arctist. It doesn't allow you to stop the line drawing, move the pointer and restart, so instead you have to cancel the operation, reselect the icon and restart at the new position. There is a ray drawing option, but this has limited use.

Selecting the spray icon displays a menu giving a choice of 10 spray densities from a very light to very heavy coating. This random spray can effect works really well, and is one of the highlights of the package.

The final three icons are rubout for clearing rectangular areas, block copy and disc access. The last is a little tatty, as the load and save options are a little close together and it is easy to choose the wrong one. Not only that, there is no warning if you are about to overwrite an existing file.

It is possible to get text on to the screen but



Tutenkhamen

only in the standard font, and you can't cancel what you've written if it doesn't fit properly – you can only paint over it.

Each screen is saved in the standard format so it can be included in your own programs, and in addition there is a sprite option to load or save individual portions of the screen. With this you can create your own library of common drawing components.

The pixel editor works fine except that you cannot edit the top right fifth of the screen where the display is sited. You can scroll your picture across the screen until the section you want to edit appears, but although it works this procedure is awkward and slow.

Arctist contains some excellently implemented options, such as the spray, but others, such as the text and shapes, really let it down. This package is not as easy to use as Artisan and lacks many of its useful features. But bearing in mind its 16 times the number of colours and at half the price, Arctist is well worth buying.

The bottom line...

Worth the price and has an excellent spray feature. But lacks the ease of use and features of more expensive packages.



Abstract in 256 colours



The Archimedes rainbow



Data power

Sampled by Don Turnbull

HAVING used database systems a little in the past, for address applications mainly and without finding any pleasure in the experience, I approached Minerva's System Delta-Plus with some built-in reservations and at first I was sure that my fears were well-founded.

The early pages of the accompanying manual did not seem to offer the simple straightforward approach to which, in my opinion, any buyer of a complex piece of software or hardware is entitled. The first few chapters, a simple grounding in using the Archimedes Wimp, obscure what you really need to know.

However, perseverance pays off. Once past the opening pages and into the demonstration section, learning about the system becomes enjoyable and relatively easy. The experimentation

controller, monitor adjuster – a useful feature – and two special icons that enable you to call up system commands or halt an operation.

Multi-tasking is easy since up to eight files can be open at any one time and it is quite feasible to, say, print from one file while browsing a second and searching a third. It is also remarkably easy to divide any file into sub-sets – as many as 32 – which can be manipulated independently of each other and of the file from which they are drawn.

Vital to those of us with accumulated data on earlier BBC Micros is the Import facility which will handle data from Mini Office II, Viewstore, dBase, Beta-Base, InterBase, pure Ascii, Lotus and Data-Gem. Minerva will also advise on the transfer of data from other systems not covered in its manual.

System DeltaPlus is quoted as being able to handle 2.14 billion records – for a world census perhaps? The statement puts the scope of the system in perspective.


While DeltaPlus holds out all sorts of enticements to programmers and specialists in database management, the majority of those who buy it will do so for the Wimp Card Index System which, once mastered, is certainly a pleasure to use.

Sensibly Minerva has taken every possible advantage of the Archimedes Wimp environment and added a few twists of its own. Written as an extension for the resident language, System DeltaPlus makes full use of all the power and speed that the machine offers. In practice this means that the non-technically minded have a very user-friendly system, while serious programmers can produce simple utilities or complex relational applications in whatever language they prefer.

The impressive speed of DeltaPlus derives from the basic routines written in ARM machine code. The use of Basic at operator level gives remarkable ease of use – compiling and manipulating data has never been so enjoyable.

Perhaps the manual is not quite all it could be, but once you are into the system – and for the novice this means only an hour or two of work – it becomes a useful guide to further enlightenment. There is, or will be shortly, an Advanced Programmer's Manual for those who wish to construct their own personalised systems. Good luck to them.

As it stands System DeltaPlus is just what the other 99 per cent of us need and want right now.

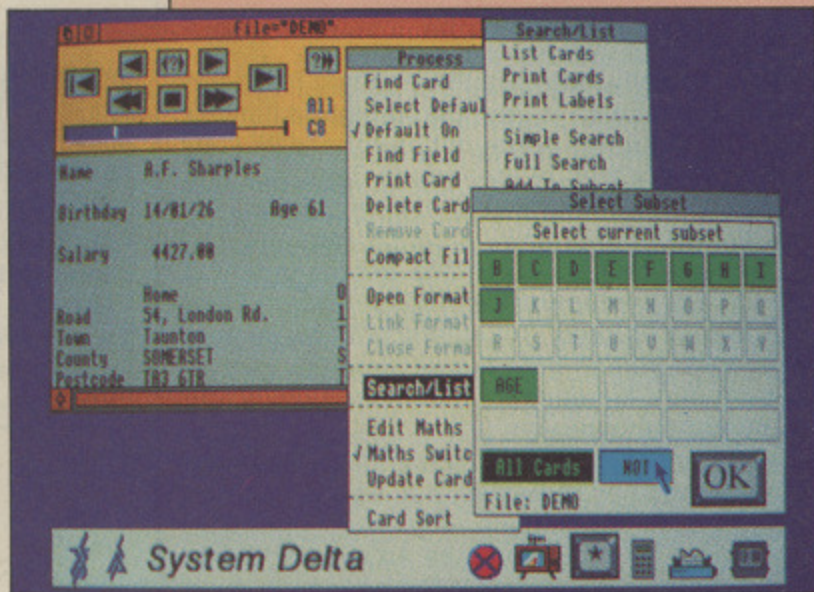

A system of very clear Wimp menus

section takes the beginner through the Card Index functions step by step, building up a wider and wider picture of file construction and manipulation.

A system of very clear Wimp menu control all the usual database functions and, helpfully, clicking the mouse anywhere on the empty screen calls up a menu from which a new file can be created or an old one opened. In addition a fixed pane at the top of every record screened contains video control-style icons for fast or slow browsing.

Clicking the mouse on this pane produces a Process menu that controls record handling actions such as Search/List, Find Card, Delete Card, Print Card, Card Sort and so on. There are 16 options in all, plus three sub-menus. This menu also enables the execution of mathematical and statistical operations on data.

Icons, available at the foot of all screens, provide the regulation clock, calculator, printer

The bottom line...

Beaver on through the manual's opening pages – you'll find the effort well worth while.

Product: System DeltaPlus
 Price: £69.95
 Supplier: Minerva Systems, 69 Sidewell Street,
 Exeter EX4 6PH.
 Tel: 0392 37756

Membership
is
FREE

THE IMPACT GAMES CLUB

The Fastest Growing
BBC Micro & Acorn Electron
Games Club in Britain

ARCHIMEDES

SAIGON **NEW**

(Tynesoft)
A superb war simulation, very good graphics, everything Commando should have been.

ICARUS

(Mandarin Software)
A spectacular fast-action game with over 20 levels. Its split screen allows 1 or 2 player action

PLAY IT AGAIN SAM

- (Superior Software)
1. Citadel
 2. Strykers Run
 3. Thrust
 4. Ravenskull

PLAY IT AGAIN SAM 2

- (Superior Software)
1. Repton 3
 2. Codename Droid
 3. Crazee Rider
 4. Galaforce

6 month's membership is absolutely FREE when you buy any of the games on this page. What you get:

1. At least 20% discount on the latest major games releases (often more).
2. Monthly catalogues with details of:
 - a) The latest releases for the BBC & Electron Micros.
 - b) The latest posters of your favourite games at less than 1/2 price
 - c) Free to enter prize competitions
 - d) Amazing scoop purchase offers.
3. Hints, Tips and Game Solutions available to help you get more from your games.
4. Superb service - despatch normally same day as order - ALL games sent by 1st class post - FREE postage and packing.

PLEASE NOTE - Members are under NO obligation to make any further purchases.

NEW CONQUEROR

(Superior Software)
A 3 level tank game as revolutionary as Zarch. Conqueror can be played as an arcade game or a full strategy game. The best reason yet to buy an Archimedes.
Only £19.95 (RRP £24.95)

NEW SPYCAT

(Superior Software)
You can't buy the book but you can buy the game. Follow the adventures of Spycat Peter Wrong and his exploits in the M14 1/2. This challenging and entertaining espionage spoof will keep you on the edge of your seats for many a cold night to come.

FREE GAME HELP SHEETS WHEN YOU JOIN

You may choose any 1 of the following when joining:-

- | | |
|------------------------------------|--------------------------------------|
| CITADEL (Solution and Map) | PALACE OF MAGIC (Helpsheets and Map) |
| RAVENSKULL (Solution and 4 Maps) | SPELLBINDER (Helpsheets and Map) |
| CODENAME: DROID (Solution and Map) | ELIXIR (Helpsheets and Map) |

TITLE & PUBLISHER	BBC or Electron Cassette	BBC (or Electron) 5 1/4" Disc	Master Compact (or Electron) 3 1/2" Discs
(* = Electron disc available)			
SUPERIOR			
Spycat	7.50	9.50	11.95
Quest	7.50	9.50	11.95
Play It Again Sam 2	7.50	9.50	11.95
Bonecruncher	7.50	9.50*	11.95
Spellbinder	7.50	9.50*	11.95
Play It Again Sam	7.50	9.50*	11.95*
The Life of Repton	5.50	6.35*	7.50
Elixir	7.50	9.50*	11.95*
Palace of Magic	7.50	9.50*	11.95*
Repton Around The World	5.50	6.35	7.50
Crazee Rider	7.50	9.50	11.95*
Codename: Droid	7.50	9.50	11.95*
Grand Prix Cons. Set (BBC Only)	7.50	9.50	11.95
Repton 3	7.50	9.50	11.95
Revs & Revs 4 Tracks (BBC Only)	10.35	11.95	15.95
Elite	10.35	11.95	15.95
Acornsoft Hits Vol. 1 or 2	7.50	9.50	11.95
Superior Coll. 1 or 2 (BBC Only)	7.50	9.50	11.95
Superior Coll. 3 (Elec Only)	7.50	-	11.95*
Conqueror (Archimedes Only)	-	-	19.95
Zarch (Archimedes Only)	-	-	15.95
TYNESOFT			
Saigon	7.50	11.95	11.95
Winter Olympiad '88	7.50	11.95	11.95
Spy vs Spy	7.50	11.95	11.95
The Big KO	6.35	10.35	10.35
Boulderdash	7.50	11.95	11.95
Indoor Sports	7.50	11.95	11.95
Phantom	6.35	10.35	10.35
Oxbridge	6.35	-	-
Commonwealth Games	6.35	10.35	10.35
Future Shock	7.50	11.95	11.95
Microvalue (4 games) Elec	3.99	-	-
Microvalue 2 (4 games) only	3.99	-	-

TITLE & PUBLISHER	BBC or Electron Cassette	BBC 5 1/4" Disc
ASL		
Ziggy	6.95	8.75
Ransack	7.50	9.50
Despatch Rider	7.50	9.50
Impact	7.50	10.35
BEAU JOLLY		
Five Star Games 3 (7 games)	7.50	-
Computer Hits 4 (12 games)	7.50	-
Computer Hits 5 (5 games)	5.50	-
BUGBYTE		
Tutankhamun's Revenge	-	6.35
Bugbyte Comp (4 games)	-	6.35
Bugbyte Comp (4 games)	-	6.35
CDS		
Colossus Chess 4	7.50	11.95
Steve Davis Snooker	1.99	4.50
Brian Clough Football	11.95	15.95
DOMARK		
Star Wars	7.50	11.95
Living Daylights (BBC Only)	7.50	10.35
Trivial Pursuits (BBC Only)	11.95	15.95
ELITE		
Paperboy	7.50	11.95
HEWSON		
Evening Star	7.50	11.95
Uridium	7.50	11.95
GODAX		
Skirmish	7.50	9.50
Kourtyard	7.50	9.50
MANDARIN		
Icarus	7.50	9.50
MIRRORSOFT		
Tetris	6.95	10.35
Spitfire '40	7.50	10.35
Strike Force Harrier	7.50	10.35

BBC and Electron BUDGET CASSETTES	
Only £1.99 each:	
Repton 1	Atom Smash
Deathstar	Bar Bkards
Tempest	Breakfree
Steve Davis Snooker	Cavern Capers
3D Doty	Confusion
Microball	Cops+Robbers
Olympic Spectacular	Anarchy
Soccer Boss (Elec Only)	
Combat Lynx	
Cops and Robbers	
Rik the Roadie	
The Hacker	
Licence to Kill (Elec Only)	
Croopy Cave	
Triple Decker 2	
Panic	
Magic Mushrooms (BBC Only)	
Howzat Triple Pack	
Mango	
Mineshaft	
Starlight	
Trapper	
Grid Iron	
Return of R2	
Video Card Arcade	
Triple Decker 1	
Triple Decker 3	
Only £2.99 each:	
Plan B2	
Warehouse	
Peter Scott Trilogy	
Snooker (BBC Only)	
Pro Golf	
League Challenge	
Survivors	
Plan B	
Uranians	
Twin Kingdom Valley	
Tennis	
Cricket	
Hunky Dory	
Sky Hawk	
Cricket	
Sky Hawk	
Hunky Dory	
Revs & Revs 4 Tracks (BBC only)	
Aviator (BBC only)	

Send S.A.E. for full catalogue

HOW TO ORDER

Simply fill in the coupon (or write us a letter to save damaging your magazine) and send with a cheque or postal order to Impact Posters. (Please make payable to Impact Posters).

- Despatch normally same day as order
- FREE postage and packing (Overseas add £1)
- ALL games despatched by 1st Class post.



Impact Posters
Neepsend House
1 Percy St.
Sheffield S3 8AU
Tel. (0742) 769950

To: Impact Posters, Neepsend House, 1 Percy St., Sheffield, S3 8AU
Please enrol me for 6 months membership with The Impact Games Club.
Please send me the following games:

TITLE	FORMAT (Cassette etc.)	COMPUTER	PRICE
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

I enclose a cheque/PO for £

(BLOCK CAPITALS PLEASE)

Name

Address

Postcode

Please send me FREE the helpsheets/solution and map(s) for the following game:-

* Please note members are under no obligation to make any further purchases.

Archimedes

BEEBUG the recognised Archimedes specialists

RISC USER

We have launched a magazine and support group specifically for users of Archimedes. The magazine provides news, reviews, hints and programs, while the support group gives Technical Advice and 5% discount on our range of Archimedes products. UK subscription is £14.50 per annum.

New BEEBUG 0% Finance

We are now able to offer customers 0% finance on Archimedes Computers. Please contact us for written details. We also offer normal finance on all other equipment over £300.

ARCHIMEDES 300 SERIES

(Always in stock)

0190G BBC 305 Entry System *	803.85
0191G BBC 305 Mono System *	861.35
0192G BBC 305 Colour System *	1033.85
0193G BBC 310 Entry System *	891.25
0194G BBC 310 Mono System *	948.75
0195G BBC 310 Colour System *	1121.25
0257G BBC 310M Entry System *	960.25
0258G BBC 310M Mono System *	1017.75
0259G BBC 310M Colour System *	1190.25

* Free software See Special Offer box for details

MEMBERS SPECIAL OFFER

When buying a new Archimedes we will give you absolutely free: The PC Emulator software, Printer lead and Lockable 3.5" disc box with 10 discs all worth over £100. Not available on 0% finance

ARCHIMEDES SOFTWARE

1080B Ansi C	113.85	108.16
1081B ISO Pascal	113.85	108.16
1082B Fortran 77	113.85	108.16
1083B Twin	33.35	31.68
1084B Logistix	113.85	108.16
1086B Prolog X	228.85	217.41
1087B Lisp	228.85	217.41
0900B PC Emulator	113.85	108.16
1095B Artisan	39.95	37.95
1096B Graphic Writer	29.95	28.45
1097B Archimedes Toolkit	39.95	37.95
1098B Alpha Base	49.95	47.45
1050B Viewsheet (Emulation)	59.80	56.81
1051B Viewspell (Emulation)	39.85	37.86
1052B Viewstore (Emulation)	59.80	56.81
1053B Viewindex (Emulation)	14.95	14.20
1057B View (Emulation)	59.80	56.81

Trade-In your BBC or Master Series Computer for an Archimedes.

Sample Discounts available:

BBC B issue 7 with DFS	£225
Master 128	£250
Master Compact Entry	£215

Computers must obviously be in good working condition to qualify for this offer. Please telephone for further details

ARCHIMEDES 400 SERIES

0263G Archimedes 440 Entry	2643.85
0264G Archimedes 440 Mono	2701.35
0265G Archimedes 440 Colour	2873.85

Beebug Mouse Mats

We are now able to offer high quality Mouse Mats for your Archimedes. Price £3.68 (£3.50 to Members)

ARCHIMEDES UPGRADES

0234B Econet Board (as M128)	48.88	46.43
0266C 0.5Mb RAM (305 only)	102.35	97.23
0267F Floppy Disc Drive	143.75	136.56
0268G 20Mb Hard Disc (300's)	573.85	545.16
0269C Podule Backplane	44.85	42.61
0270D ROM Podule	67.85	64.46
0271D I/O Podule	90.85	86.31
0272D MIDI add-on to I/O	33.35	31.68
0789B Beebug Mouse Mat	3.68	3.50

ARCHIMEDES LEADS

0558B SKART Lead	10.47	9.95
0425B Archimedes Printer Lead	10.47	9.95
0795C 5.25" Archie Disc Lead	29.05	27.60
0796C Serial Link Kit & Disc	18.16	17.25

OTHER HARDWARE

0805DCC ROM Podule	56.35	53.53
0806B Battery backup for above	11.50	10.92
0803B Armadillo Sound Sampler	126.50	120.18

PRICES INCLUDE VAT

Where two prices are shown, the first is our full price and the second our members price.

MULTISYNC MONITOR

0505G Taxan 770 Plus	604.05	573.85
----------------------	--------	--------

ZARCH

1179B ZARCH	19.95	18.95
-------------	-------	-------

ARCHIMEDES BOOKS

1242B Archimedes Ref. Man.	29.95	28.45
1271B ARM Assembly Prog.	12.95	12.30

3.5" BEEBUG DISCS

0675B 10 x Beebug 3.5" DS Discs	15.79	15.00
0676E 40 x B'Bug 3.5" with box	58.95	56.00

MINERVA

0920B Deltabase	29.95	28.45
0921B System Delta Plus	69.95	66.45
1233B Sys. Delta Plus Ref. Man.	29.95	28.45
0922B Order Processing	64.95	61.70
0923B Sales Ledger	64.95	61.70
0924B Stock Manager	64.95	61.70
0925B Purchase Ledger	64.95	61.70
0926B Nominal Ledger	64.95	61.70
0927B School Administrator	79.95	75.95
0928B Video Rental	69.85	66.36
0929B Reporter	24.95	23.70
0930B Minotaur Game	14.95	14.20

5.25" DISC DRIVE INTERFACE FOR THE ARCHIMEDES

Connect up to four external disc drives to your Archimedes with our fully buffered disc drive interface. It fits neatly to the backplate of your machine and requires NO SOLDERING.

Stock code 0795C Members price £27.60

SERIAL LINK KIT & DISC

This kit enables files to be transferred between BBC and Archimedes, in either direction, with the minimum of fuss. The software is menu driven and is fully compatible with DFS and ADFS. The three metre lead simply connects between the serial ports and the software is loaded via the Archimedes.

Stock code 0796C Members price £17.25

All Prices Include VAT.

Carriage

Carriage is denoted by the letter contained in the stock code. A-50p, B-£1, C-£2, D-£3, E-£4, F-£5.50, G-£7. When ordering several items, use the highest price code and half of each subsequent code. For courier delivery use code G.

Credit Cards



Access and Visa orders are welcome, and may be placed by letter or telephone (24 hours).

BEEBUG LTD,
Dolphin Place, Holywell Hill,
St. Albans, Herts., AL1 1EX.

(0727) 40303

Please telephone for a Free Information pack and Archimedes brochure.

MUG

THE INDEPENDENT MicroLink User Group NEWSLETTER

Bulletin Board update

The MicroLink Bulletin Board has just had a spring clean, and a backlog of 9,000 old messages removed. But at the rate at which it's being used, it won't take more than a couple of months to replace them.

The Bulletin Board is an area where anyone can leave a public message, start or join in a discussion on any topic or just ask for help.

The range of subjects covered is huge and always changing; cars are bought and sold, philosophy, pop music and poaching argued about and the reasons why somebody's software doesn't seem to work are revealed.

There are even the occasional trivia quizzes (well, do YOU know how many electric tramways are still running in the UK?).

There's nothing quite like it outside the world of computers, but be warned. It can be very addictive.

Preparing for Prime time

EVERYONE upgrades their hardware occasionally, and MicroLink is no exception. But it's not an Amstrad PC1640 they're getting.

For some time now, the rate at which people are joining has put a bit of a

Odd offers

THE prize for the most unusual use of MicroLink goes to ... well, nobody knows. But the last month has seen some odd goings-on.

There have been people advertising for goose shooting, others looking for burned out buildings and the usual range of online floral orderings to persuade moth-

strain on the old Prime 850 computer, and many users would agree that sluggish is perhaps a mild way to describe MicroLink at peak times.

Now work is underway to install a Prime 9955 - not only has it got a longer name but it's faster and better able to cope with the increased demand.

There's a lot of things to be done before the switchover can happen, software has to be changed and the digital detritus collected on the old computer in its years of dealing with us humans has to be cleared up.

Exactly how much better the new service will be isn't clear, although technical people tend to use words like "massively" and get quite excited.

We're all eager to find out...

The MicroLink User's Manual

ONE of the projects that MUG is coordinating is the production of the MicroLink User's Manual. Designed to complement the information given to every MicroLink subscriber on old fashioned paper, the manual sets out to be an online way of describing the many facilities available on MicroLink from the point of view of the people who use them.

At first, MicroLink can

appear to offer a bewildering selection of things to try, and even for experienced users the different options can be confusing. And there's always a way to do things faster, or at less cost.

Of course, the information to help people do this has always existed. But it's been hard to find, and until now there hasn't really been any way for users to share their discoveries in such a way that others will be able to make use of them. The MicroLink User's Manual sets out to remedy this problem.

At the moment MUG is collating the information. Sometimes the amount of data collected by users can be staggering - one subscriber mailed in over 200k of hints and tips saved up over years. Of course, we're just as happy to hear from anyone with one good idea.

All the data will be indexed and made available; the exact design is still being discussed, but like anything else MUG does, it will be free to use.

User groups are good news

THE MicroLink Users' Group came about as a result of various subscribers asking whether there was any organisation run to help users.

User groups in any area

clothes on. And with a bit of advertising on the Bulletin Board and a touch of help from MicroLink themselves he's gathering together all those on the system who are similarly inclined.

Now that has to be the most original use for MicroLink.

Unless (of course) you know better...

are usually good news; they form a focus for ideas, opinion and self-help and give the users a collective voice.

The flexibility provided by MicroLink and Telecom Gold make MUG particularly useful. There are no printing costs for newsletters and there's almost instant access to everyone in the group through the mail system.

MUGs been going for about a month now, and we've already formed a team of people who have volunteered to answer queries and help anyone with MicroLink-related problems.

It's a small world...

... but full of Telecom Gold computers, it seems. The UK Telecom Gold system, of which MicroLink is the most active part, is just one sector of a global network called Dialcom.

While MicroLink is System 72, and other UK computers are in the range 70 to 90, there are Dialcom computers almost everywhere. And like international telephone exchanges, they've all got their own numbers.

MUGger Adrian Mars is trying to find out just which computers are where. This might seem an eccentric, if harmless, hobby, but such information as is available on MicroLink is difficult to find and (apparently) out of date.

And it could be the first step to organising an international group of Dialcom users, which really would be a first and another step towards the electronic community of tomorrow.

If you know anything about the Dialcom network numbering scheme, then Adrian (MARS.ADRIAN on the mail system) and MUG would be glad to hear from you...

Suggestions of material for inclusion in the MUG Newsletter should be sent to Rupert Goodwins on MAG95816

SOFTWARE AT BARGAIN PRICES

ED 1.

GCE/CSE

MATHS 1
MATHS 2
ENGLISH
BIOLOGY
LINKWORD ITALIAN



£8

TRIPLE DECKERS – 3 Games on 1 Cassette for £1.99

- | | |
|---|---|
| 1. Grand Prix/Day at the Races/Manic Mole | 6. Cavern Capers/Snap Dragon/Castle of Sand |
| 2. Invasion Force/Haunted/Parachute | 7. Atom Smash/Knock Out/Reaction Tester |
| 3. Lunar Invasion/ Lander/Jam Butty | 8. Grebit/Mr. Freeze/Fruit Worm |
| 4. Howzat/Fishing/Golf | 9. Break Free/Missile Jammer/Code Breaker |
| 5. Starfight/Skramble/Karate Warrior | |



CURRENT TITLES	Cass	Disk
Quest	7.50	9.95
Play It Again Sam II	7.50	9.95
Kourtyard	7.50	9.95
Skirmish	7.50	9.95
The Lost Crystal	9.95	11.95
Spellbinder	7.50	9.95
Life of Repton	5.50	6.50
Elixir	7.50	9.95
Bonecruncher	7.50	9.95
Despatch Rider	6.00	8.95
Impact	7.50	9.95
Ransack	7.50	9.95
Ziggy	6.00	8.95
Graham Gooch Cricket	6.50	9.95
Thunderstruck II	6.50	9.95
Spy v Spy	7.50	9.95
Phantom (Tynesoft)	6.50	9.95
Winter Olympiad	7.50	12.50
Village of Lost Souls	7.50	10.50
Project Thesius	7.50	10.50
Myrom	7.50	10.50
Entfiar Seven	-	14.95
Island of Xaan	7.50	10.95
Rick Hanson Trilogy	18.00	21.00
Play It Again Sam	7.50	9.95
Spitfire 40	7.50	10.95
Palace of Magic	7.50	9.95
Crazy Rider	7.50	9.95
Codename Droid	7.50	9.95
Repton 40 Screens	5.50	6.75
Revs + 4 Tracks	10.50	12.95
Grand Prix Construction	7.50	9.95
Superior Collection Vol1	7.50	9.95
Superior Collection Vol2	7.50	9.95
Sentinel	7.50	12.95
Colossus Chess	7.50	12.95
The Hunt	7.50	10.95
Living Daylights	7.50	12.95
Paperboy	7.50	12.95
ELite	10.50	10.95
Atar wars	7.50	10.95
Evening Star	7.50	-

EASTER SPECIAL

GXR Graphics Extension
Rom



BBC B/B+
£19.95



Please state machine

BARGAINS OF THE MONTH (Tapes)

- Power Pack (7 games) 4.99
Last of the Free 2.99
Genesis Project &
International Mega Sport 3.99
(Twin Tape)

SPECIALS ON DISC

- DUNJUNZ (Argus) 4.99
BUGBYTE COMPILATION 1 ... 4.99
BUGBYTE COMPILATION 2 ... 4.99
ROUNDHEAD (Argus) 5.99
WORLD WAR I 5.99
WAR (Martech) 4.50
FOOTBALLER OF THE YEAR 4.50

ATLANTIS (Tapes)

- Panik 1.99
Creepy Cave 1.99
Cops and Robbers 1.99
League Challenge 2.99
Survivors 2.99
Warehouse 2.99

BLUE RIBBON (Tapes) @ £1.99

- | | |
|-------------------|---------------|
| Video Card Arcade | Bar Billiards |
| 3D Dotty | Trapper |
| Return of R2 | Mango |

ALTERNATIVES (Tapes) @ £1.99

- | | |
|----------------|---------------------|
| Combat Lynx | Soccer Boss |
| Red Arrow | Olympic Spectacular |
| Dead or Alive | Crazy Herbert |
| Mine Shaft | Licence to Kill |
| Video Pinball | Moon Creater |
| Micro Ball | Confusion |
| Rik the Roadie | Bird Strike |

BUGBYTE (Tapes) @ £2.50


- | | |
|---------------|---------------------|
| Plan B (2.99) | Squeak Alizer |
| Ice Hockey | Star Force 7 |
| Tennis | Twin Kingdom Valley |
| Cricket | Village Pond |
| Dunjunz | Sky Hawk |
| Uranians | Roboto |
| Jack Attack | Hunky Dory |
| Mega Rock | |

TOWERHILL COMPUTERS LTD

1 Hockcliffe Road
Leighton Buzzard, Bedfordshire

Telephone: Leighton Buzzard (0525) 385329

ALL PRICES INCLUDE V.A.T. AND P&P. OVERSEAS ORDERS ADD £2.00



SUPER BARGAINS ON HARDWARE

ACORN Z80 Second Processor – BBC/Master Complete with CP/M Software:-

COBOL + ANIMATOR
Z80 Professional Basic
CP/M 2.2
GSX Graphics
Nucleus

Graphplan (Spreadsheet)
Fileplan (Database)
Memoplan (Word Processor)
Accountant (Accounts)

Normal RRP ~~£399~~

Our Price £189



ACORN TELETEXT ADAPTORS

complete with manual +
TFS ROM for all BBC/Master

RRP ~~£229~~

OUR PRICE £89.95

ACORN TWIN DISC DRIVE

fitted in Master Monitor plinth
80 track/800k

£179

ACORN DISC DRIVE


40 track/100k

£39.95

ACORN ARM SECOND Processor for BBC/Master



4 Megabyte ram
Acorn Disc CPU at 8 Mhz
Full documentation
Bundled software includes Basic, Fortram, Prolog, Assembler, Twin



RRP ~~£999~~

OUR PRICE £599

ACORN SPEECH UPGRADE KITS BBC/B+

**OUR PRICE
£19.95**

10 DS/DD DISCS 5.25" DS/DD 96TPI

Reinforced hub rings in library case
£6.50

**ACORN 6502
Second Processor
BBC/Master
£99**

ACORN MASTER 512 add on processor

includes Mouse, Gem Paint + Gem Word
RRP ~~£199~~ **OUR PRICE £169**




TOWERHILL COMPUTERS LTD



1 Hockcliffe Road
Leighton Buzzard, Bedfordshire

Telephone: Leighton Buzzard (0525) 385329



ALL PRICES INCLUDE V.A.T. AND P&P. OVERSEAS ORDERS ADD £2.00

Back up your DFS discs to ADFS

Rob Anderson's utility does just that

HERE is a utility that enables the programs on a DFS disc to be copied to an ADFS disc with as little fuss as possible. It works by creating a directory under which all the files on the DFS disc are to be placed and automatically creates any further single-letter sub-directories so that an exact replica of the original disc can be made on the ADFS one.

The program is 6502 second processor compatible and a dual drive is required. It differs from

the ADFS utility COPYFILES in that you don't have to change the single letter directory of each source program to enable it to be placed on the ADFS disc and you don't have to mess about creating single letter directories.

So your DFS disc may now be upgraded to ADFS without the need to alter the programs which may expect to find certain files in various directories. It is simply a matter of entering this new directory, after which the disc will appear to be a normal DFS one except in one or two cases described later.

Option	Action	Description
1 or *	OS command	A prompt asks for the string to be passed to the operating system. For example, using this option you could catalogue the ADFS disc by typing: *-ADFS- Don't use commands that could interfere with the program like *COMPACT, which requires user ram.
2	Change DFS disc	Enables a different side of the DFS disc to become the source drive and gives you the opportunity to change the DFS disc.
3	Change ADFS directory	A new ADFS directory may be specified. This name represents the new directory which is to be created by the program, under which all specified entries on the DFS disc will be stored. The default is \$, but it is better to store every DFS disc that is copied under a unique sub-directory name that reflects the DFS disc the files came from. This helps keep the DFS files stored on the ADFS disc separate. Note that the name entered here is assumed to be with reference to the root directory.
4	Begin copying	Starts transferring selected files from the DFS disc to the ADFS one, under the directory specified using 3 - \$ by default.
	Exit	Returns to Basic.

Table 1: The available options

Using the utility

When you chain the program you are prompted for the DFS source drive - 1 or 3 - and the utility assumes the ADFS destination disc is in drive 0. The front panel of the program is entered and you'll see a catalogue of the DFS disc previously selected plus the list of available options, see the panel alongside..

The arrow keys may be used to move the cursor which initially points at the first catalogue entry. Pressing Delete makes the current one vanish, indicating that this file is not to be copied across when the backup takes place - using option 4. Pressing Copy re-displays the entry, so that the file is copied. Either key can be held down while moving the cursor enabling a number of catalogue entries to be quickly selected or de-selected.

How it works

The DFS catalogue is loaded using the osword &7F call which reads in the first two sectors of the disc - where the catalogue information is kept. The data table is stored in zero page and the result buffer is held at &3000 onwards which, once it's stored in the array *name\$* and *X%*, can be overwritten during the copying process. This uses a memory buffer from TOP+2000 to &7C00.

The files are transferred using *LOAD and *SAVE, unless the file is bigger than the memory buffer - whose size is held in *buffer%* - in which case the much slower, but more versatile, *MOVE is used. The length, load, and execution addresses of the files could have been obtained from the first two sectors of the disc which were read using osword &7F, but osfile 5 is used as it is more convenient.

Backup in action

Suppose a DFS games disc – in drive 1 – holds the programs:

```
INVADER
D.INVADER2
D.INVADER3.
```

Firstly, the DFS side number must be entered – 1 in this case. Next, the ADFS destination directory could be specified by using option 3 to enter the name GAMES1. Then, by pressing 4, all the files on drive 1 will be transferred, creating the ADFS structure shown in Figure 1.

By using this method INVADER can still chain the other files – INVADER2 and INVADER3 – because they are still in directory D.

However problems can occur if a file in one sub-directory makes access to a file in another. For example, consider the following programs held on a DFS disc:

Filename	Program
\$.PART1	10 *DIR A 20 CHAIN "PART2"
A.PART2	10 CHAIN "B.PART3"
B.PART3	10 PRINT "HELLO"

This works all right on a DFS, but once it is

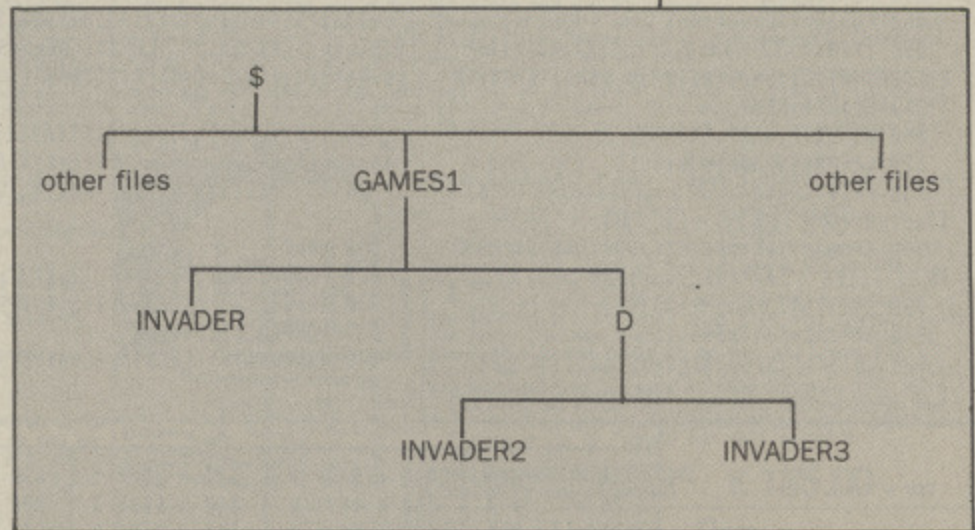


Figure 1: The ADFS file structure after backup

copied across to the ADFS disc, access to the B directory could not be made from the A directory which had already been entered in the first program – PART1.

This case is rather unusual and the programs could be altered quite easily by specifying any directory references from the root (\$) directory which, in our example, would involve changing A.PART2 to read:

```
10 CHAIN "$.B.PART3"
```

```

10 REM DFS to ADFS backup
20 REM by Rob Anderson
30 REM (c) The Micro User
40 HIMEM=TOP+2000
50 ON ERROR PROCerror
60 DIM name$(31),X$(31),info 18,fname
10
70 VDU22,7
80 PROCinitial
90 PROCfrontpanel
100 VDU22,7
110 *FX15
120 *FX4
130 END
140 DEFPROCerror
150 REPORT:AX=FNanykey:RUN
160 ENDPROC
170 DEFPROCinitial
180 ffx=&FFFFFF:*FX4,1
190 adfsdir$="":osword=&FFF1:table%=&3000:buffer%=&7C00-HIMEM
200 osword=&FFF1:osfile%=&FFDD
210 table%=&3000
220 FORAX=1TO31:name$(AX)=STRING$(8,"
"):XX(AX)=TRUE:NEXT
230 PROCtitle
240 PRINT"CHR$131"An ADFS disc must be placed in drive 0."
250 dr%=FNgetdfsdrive
260 PROCgetdfscat:ENDPROC
270 DEFPROCfrontpanel:PROCtitle
280 FORAX=1TO5:READA$:PRINTTAB(0,18+AX)CHR$131;AX;CHR$134A$:".NEXT
290 PRINTTAB(0,24)CHR$131"Cursor keys, Delete & Copy"CHR$134"to select.":
300 VDU28,0,18,39,3:PROCshowdfscat
310 REPEAT
320 IFINKEY-49ORINKEY-73 PROCos
330 IFINKEY-50 CLS:dr%=FNgetdfsdrive:PROCgetdfscat:PROCshowdfscat
340 IFINKEY-18 PROCdestdir
350 IFINKEY-19 PROCcopy
360 IFINKEY-26 IFXX>0XX=XX-13
370 IFINKEY-122IFXX<26ANDFNemntnos(XX+13,YX)<=numfileXX=XX+13
380 IFINKEY-58 IFYX>3YX=YX-1
390 IFINKEY-42 IFFNemntnos(XX,YX+1)<=numfileXX=YX+1
400 IFINKEY-106PRINTTAB(XX+1,YX)" ";X$(FNemntnos(XX,YX))=FALSE
410 IFINKEY-90 PRINTTAB(XX+1,YX)CHR$152;X$(FNemntnos(XX,YX))=TRUE
420 IFXX<>0XXOR0YX<>YXPRINTTAB(0X,0YX)"TAB(0X+12,0YX)" ;TAB(XX,YX)"TAB(XX+12,YX)"E";:0X=XX:0YX=YX
430 TIME=0:REPEATUNTILTIME=5
440 UNTILINKEY-20:ENDPROC
450 DATA OS command (or *),Change DFS disc,Change ADFS destination directory,Begin copying,Exit
460 DEFFNemntnos(XX,YX)=XX/13+(YX-3)*3+1
470 DEFPROCos:CLS:*FX15
480 PRINTCHR$131"Enter operating system command:"
490 REPEAT INPUT"*AS:PROCo(A$)
500 UNTILFNanykey<>42
510 PROCshowdfscat:ENDPROC
520 DEFPROCdestdir:CLS:*FX15
530 PRINTCHR$134"Previous selection:"CHR$131adfsdir$
540 PRINT"CHR$131"Input the new ADFS destination"CHR$131"directory : (with reference to $)"
550 INPUTadfsdir$:PROCshowdfscat
560 ENDPROC
570 DEFPROCcopy:CLS
580 PRINT"CHR$131"Creating directories:"
590 PROCo("ADFS"):DIR $
600 IFadfsdir$<>"$":PROCo("CDIR "+adfsdir$):PRINT"adfsdir$ directory created."
610 PROCo("DIR "+adfsdir$)
620 new$=""
630 FORAX=1TONumfileX
640 IF NOTXX(AX) ndir$=RIGHT$(name$(AX),1):IFINSTR(new$,ndir$)=FALSE new$=new$+ndir$:PRINTndir$:PROCo("CDIR "+ndir$):PRINT" sub-directory created."
650 NEXT
660 PRINT"CHR$131"Copying the files;"
670 FORBX=1TONumfileX:IFXX(BX)GOTO750
680 PROCo("DISC"):PROCo("DR."+STR$dr$)
690 FS=RIGHT$(name$(BX),1):IFFS="$FS=LEFT$(name$(BX),7) ELSE FS=FS+'.'+LEFT$(name$(BX),7)
700 PRINTFS
710 AX=5:XX=info MOD256:YX=info DIV256:$fname=FS:!info=fname:CALLosfile%
720 load%=info!2ANDff%:len%=info!10ANDff%:exc%=info!6ANDff%
730 IFlen%>buffer%PROCo("MOVE -DISC-:"+STR$dr$+"."+FS+" -ADFS-$."+adfsdir$+"."+FS)
740 IFlen%<=buffer% PROCo("LOAD "+FS+" "+STR$HIMEM):PROCo("ADFS"):PROCo("SAVE "+FS+" "+STR$HIMEM+" "+STR$len%+" "+STR$exc%+" "+STR$load%)
750 NEXT:PRINT" Copy complete."
760 AX=FNanykey:CLS:PROCshowdfscat
770 ENDPROC
780 DEFPROCgetdfscat:*DISC
790 PROCo("DR."+STR$dr$)
800 ?&70=dr%:!&71=table%:&75=3:&76=&53:&77=0:&78=0:&79=34
810 XX=&70:YX=0:AX=&7F:CALLosword%
820 numfileX=(table%&105)/8
    
```

Turn to Page 60 ▶

◀ From Page 59

```

830 MX=table%+8
840 FORAX=1TOnumfile%
850 IF?M%<>32 name$(AX)=":XX(AX)=FALS
E:FORB%=0T07:name$(AX)=name$(AX)+CHR$(M
X?B%)AND127):NEXT
860 MX=MX+8:NEXT:ENDPROC
870 DEFPROCshowdfscat:CLS
880 PRINTCHR$134"ADFS directory:"CHR$1
31adfsdir$"
890 IFnumfile%=@PRINTCHR$7CHR$131CHR$1
36"NO FILES !":AX=FNanykey:RUN
900 FORAX=1TOnumfile%STEP3
910 YX=(AX-1)DIV3+3
920 PRINT "RIGHT$(name$(AX),1)".LEF

```

```

TS(name$(AX),7)CHR$135;:IFX$(AX)PRINTTAB
(1,Y%)CHR$152;
930 IFAX+1<=numfile%PRINTTAB(15,Y%)RIG
HT$(name$(AX+1),1)".LEFT$(name$(AX+1),7
)CHR$135;:IFX$(AX+1)PRINTTAB(14,Y%)CHR$1
52;
940 IFAX+2<=numfile%PRINTTAB(28,Y%)RIG
HT$(name$(AX+2),1)".LEFT$(name$(AX+2),7
)CHR$135;:IFX$(AX+2)PRINTTAB(27,Y%)CHR$15
2
950 NEXT
960 PRINTTAB(0,3)"]TAB(12,3)"E";
970 XX=0:YX=3:OX%=0:OY%=3:ENDPROC
980 DEFPROCtitle:CLS
990 AS=CHR$141+CHR$132+CHR$157+CHR$131

```

```

+DFS to ADFS Backup. "+CHR$156:PROCCent
re(AS,0):PROCCentre(AS,1)
1000 ENDPROC
1010 DEFPROCcentre(AS,y%)
1020 PRINTTAB(19-(LENAS$DIV2),y%)AS
1030 ENDPROC
1040 DEFFNgetdfsdrive:REPEAT
1050 PRINTCHR$131"Input the DFS disc su
rface (1 or 3).":*FX15
1060 INPUTdr%:UNTILdr%=10Rdr%=3:=dr%
1070 DEFFNanykey:*FX15
1080 PRINTTAB(25)CHR$131;CHR$136"Press
any key";:=GET
1090 DEFPROCco($&700):LOCAL XX,YX
1100 YX=7:CALL&FFF7:ENDPROC

```

Get it right!


10 = 00	170 = C10F 6	330 = 5EFF 5	490 = 50 4	650 = 2C83 0	810 = E469 4	970 = AED9 B
20 = 00	180 = 9C7A E	340 = E5D2 A	500 = 3C63 4	660 = 5FF7 F	820 = 56D3 A	980 = 1F63 1
30 = 00	190 = EB66 7	350 = B6D1 9	510 = 54D5 1	670 = 4764 9	830 = 294A A	990 = 2C8A 4
40 = 4C8D D	200 = EC9F B	360 = 3F8F B	520 = B08F B	680 = ADFA 0	840 = 8893 F	1000 = ED0F 8
50 = 9621 4	210 = 50D5 9	370 = 5463 7	530 = F32C 4	690 = B803 B	850 = 9E76 1	1010 = B0C2 2
60 = 8493 4	220 = 7519 8	380 = 1C80 C	540 = 306E 5	700 = 17EE 6	860 = D0E6 7	1020 = B2FD 0
70 = 318E 5	230 = 5255 2	390 = F11D 5	550 = D739 9	710 = 8C8D 2	870 = 1455 3	1030 = ED0F 5
80 = 2CA9 B	240 = 88C7 5	400 = EC44 8	560 = E08F C	720 = 1B12 5	880 = 9A0D 4	1040 = 8E6F F
90 = BA35 7	250 = 9A20 A	410 = 468B 5	570 = 5683 A	730 = 70E0 B	890 = 8497 3	1050 = 93C1 4
100 = 318E F	260 = 91DD 5	420 = 47F4 7	580 = 458B C	740 = 235F 3	900 = B5EA 1	1060 = 30DA 7
110 = A022 B	270 = F0FF F	430 = 58F1 D	590 = C9EC F	750 = DDF2 5	910 = E7BC 5	1070 = 22AA 9
120 = 129 C	280 = 6539 5	440 = 83E0 2	600 = 6837 E	760 = E526 8	920 = FB8E 8	1080 = 4A39 5
130 = FD2E 4	290 = BDB4 A	450 = 6A1F 0	610 = 8C72 3	770 = ED0F 3	930 = 9235 8	1090 = 9F42 5
140 = D7A7 C	300 = 1066 6	460 = D120 B	620 = E6B0 1	780 = EC4 B	940 = 1169 9	1100 = 50E0 5
150 = 4E5C C	310 = BFBA F	470 = 8847 C	630 = 8893 6	790 = A4C0 1	950 = 2C83 9	
160 = ED0F 3	320 = 9079 4	480 = 8AEB 3	640 = 67DB E	800 = 493A 3	960 = E904 0	

PANASONIC YOUR PARTNER IN PRINTING

KX-P1081

10" 120 cps Dot Matrix Printer

- 120 cps Draft; 24 cps NLQ
- Near Letter Quality printing in all pitches
- Dip switch selectable IBM® Printer modes
- High resolution, dot-addressable graphics
- Friction feed and adjustable tractor are standard

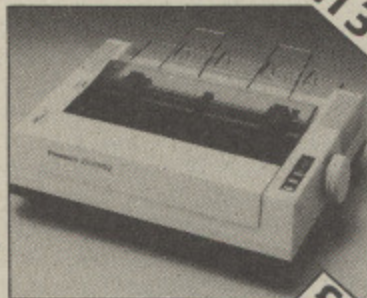

£139

KX-P1082

10" 160 cps Dot Matrix Printer

- 160 cps Draft; 32 cps NLQ
- Near Letter Quality printing in all pitches
- Courier and Bold NLQ Fonts
- Dip switch selectable IBM Proprinter™ emulation
- High resolution, dot-addressable graphics
- Friction feed and adjustable tractor are standard



£159

PRICES ARE CASH WITH WITH ORDER and Exclude Delivery and VAT All Goods Covered by Manufactures Warranty

MICROSOL
Ltd

01-739 5607

1-4 Christina Street London. EC2A 4PA.

HARDWARE, SOFTWARE & PERIPHERALS AT DISCOUNT PRICES

Master 128K	only £400	Archimedes A305 Base	£725
Master 512K Upgrade	£215	Archimedes A305 + Mono Monitor	£775
Master Compact	£368	Archimedes A305 + Colour Monitor	£925
Master Compact+TV modulator	£382	Archimedes A310 Base	£799
Master Compact+Mono monitor	£415	Archimedes A310 + Mono Monitor	£849
Master Compact+Colour monitor	£570	Archimedes A310 + Colour Monitor	£999

PRINTERS (All printers are supplied with lead-state model)

Amstrad DMP 3160 (160cps 80col)	£201.25	Citizen MSP 40 (240cps 80col)	£345.00
Amstrad DMP 4000 (200cps 132col)	£316.25	Citizen MSP 45 (240cps 136col)	£460.00
Amstrad LQ 3500 (24Pin)	£316.25	Citizen MSP 50 (300cps 80col)	£460.00
Amstrad LQ 5000 (24Pin)	£431.25	Citizen MSP 55 (300 cps 136col)	£575.00
Citizen 120D (120cps 80col)	£178.25	Citizen HQP 40 (24Pin 200cps 80col)	£431.25
Citizen LSP 100 (150cps 80col)	£212.75	Citizen HQP 45 (24Pin 200cps 136col)	£529.00
Citizen MSP 10E (160cps 80col)	£258.75	NEC P2200 (24Pin 168cps 80col)	£379.50
Citizen MSP 15E (160cps 136col)	£281.75	Daisy Wheel Citizen Premier (35cps)	£488.75

MODEMS

Nightingale with Commstar rom	£90	Pace Series 4 2123S V21/23	£255
Pace Linnet V21/23	£135	Miracle WS3000 professional V21/23	£290
Miracle WS4000 V21/23	£160		

DISCS

	10	25	50
5.25" DS/QD 80 track	£6.00	£13.00	£22.00
3.5" DS	£13.00	£30.00	£55.00

EDUCATIONAL PROGRAMS

	Tape	5.25" disc	3.5" disc
Typing Tutor	£12.95	£14.95	£15.95
Early Maths	£7.95	£9.95	£10.95
Early Words	£7.95	£9.95	£10.95

NEW NEW NEW NEW NEW

BT FAX MACHINE (group 3 auto reception)
RSP £995 + VAT OUR PRICE £925 + VAT

CANON FAX 110 (group 2/3 auto plus telephone)
RSP £1499 + VAT OUR PRICE £1295 + VAT
(Free installation plus 1 year warranty on site with Canon 110)

ALL PRICES INCLUDE VAT

Send cheques to:

WILLOW SOFTWARE

Mail Order Dept (MU 5)

The Willows, Wrington Lane, Congresbury, Bristol BS19 5BQ
Tel.: (0934) 876031 (2 lines & Ansaphone out of hours)



Offers available for a limited period & subject to availability. Phone for best price-we always try to give you the best deal




Build your own system...

with the Minerva SYSTEMS DELTA, GAMMA and SIGMA Individual programs designed to integrate; use separately or link together to form a powerful business system. Systems Delta, Gamma and Sigma... designed by highly acclaimed professional programmers with proven ability on the BBC, now providing definitive software for the Archimedes.

DATABASES

System DeltaPlus and WIMP Card Index £69.95
The ultimate in simplicity and flexibility. Unrivalled in power. Vast capacity including 2 billion records, 16 million fields. 4.2 billion subset possibilities, multiple files open at once, etc. Operates within the window environment.

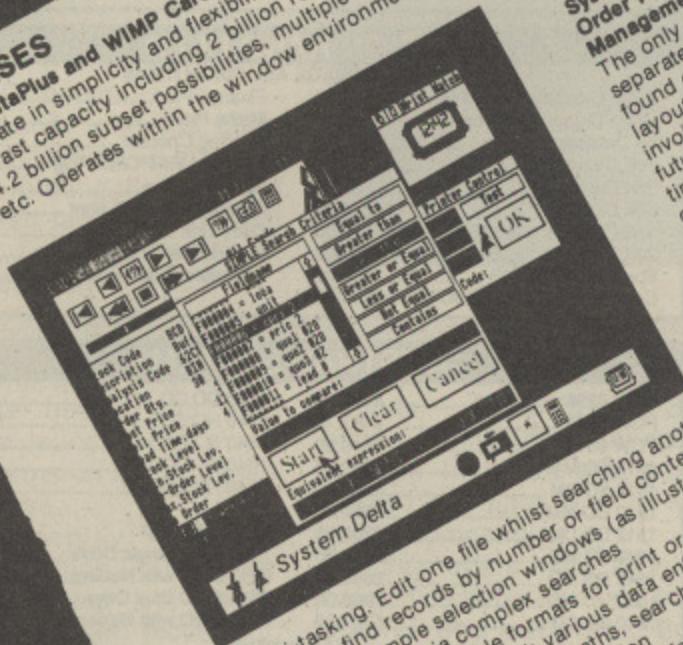

- Multi-tasking. Edit one file whilst searching another
- Instantly find records by number or field content
- Search by simple selection windows (as illustration)
- Multiple user-definable complex searches
- Simple card creation with various data entry types
- Unrivalled, comprehensive maths searches and sort
- Mailing labels with line compaction
- Comprehensive, yet simple reporter facility
- Card copier to transfer records across files
- Imports data from dBase, Lotus, Viewstore, etc.
- Includes relational programming language, if required

System Delta with Card Index £64.95
Still the most comprehensive and flexible data management system on the BBC. 8160 records, 255 fields, 8000 characters per record, 8 subjects. Up to 5 files open at any time. Find any searches, sorts and maths facilities. Multiple print formats. Default card. Card copier for transfer between files. Fully programmable relational system with over 150 commands

Mailshot, Reporter and Inter/View Link £19.95 each
Three versatile support programs for use with all System Delta files. Mailshot produces up to 4 across labels and links with wordprocessors for mail-merged documents. Reporter produces simple lists as well as fully definable reports including negative or positive columns, averages, totals, headings, sub and sub-sub-totals. Inter/View Link transfers data directly or as a result of any calculation including sum, average, count, etc.

System Delta Personal Accountant (Nominal £55.95) £45.95 each module
Five comprehensive accounting modules for use separately or as integrated suite. Many advanced features as listed above. Total flexibility allows customisation if required.

Order Processing/Invoicing, Sales Ledger, Stock Management, Purchase Ledger, Nominal Ledger
School Administrator £69.95
Pupil and staff records allow extra fields to be added if desired. Entry reports for examination boards. Form 7 DES statistics, etc.

ACCOUNTS

DeltaBase £29.95 Affordable excellence
Extremely powerful yet simple to use general database. Over 8000 records, 255 fields and 16 subsets. Pull down help screens. Various screen modes. Extensive single or multiple criteria searches, sorts and maths facilities. Restructuring records is easy. Imports data from Viewstore, Betabase, InterBase, Mini-Office, etc.

System Delta Business Accounts £69.95 each module
Order Processing/Invoicing, Sales Ledger, Stock Management, Purchase Ledger, Nominal Ledger
The only flexible accounting suite. Use modules separately or integrate. Contains many features not found on other micros including definable invoice layouts, archive mail order customers on one invoice, varied discount structures for debtors/creditors or statements by various criteria, generates purchase orders, suggests stock levels, determines most profitable stock items, stock and sales graphs, numerous user-definable nominal accounts with unlimited bank accounts, output to a spreadsheet.

SPECIALIST APPLICATIONS
Flexible specialist software available for School Administrator, Video Rental, Newsagent, Hotelier (Genealogy. Timetabling coming early 1988)

GAMES
Minotaur Game £14.95
3D maze game. Fast reactions not needed. Create maze to your own size. Survive to rescue the men and kill the Minotaur.

Send for full brochure including other products

BBC MICRO

Specialist Applications from £54.95
Comprehensive management programs for Hotelier, Video Rental and Newsagent.

System Gamma £49.95
The first Graphics Management System. Anyone can produce stunning graphics and charts easily from the menu driven GammaPlot supplied. Multiple charts on screen at any one time and in any position desired. On screen text editorial. Several fonts provided for variable text. Statistical analysis. Macro facility. Entry by keyboard or System Delta files. Fully programmable to create your own graphics programs.

System Delta Personal Accountant (Nominal £55.95) £45.95 each module
Five comprehensive accounting modules for use separately or as integrated suite. Many advanced features as listed above. Total flexibility allows customisation if required.

Order Processing/Invoicing, Sales Ledger, Stock Management, Purchase Ledger, Nominal Ledger
School Administrator £69.95
Pupil and staff records allow extra fields to be added if desired. Entry reports for examination boards. Form 7 DES statistics, etc.

MINERVA SYSTEMS

69 SIDWELL STREET · EXETER · DEVON EX4 6PH · TELEPHONE EXETER 0392 37756

International Distributors in Africa, Australia, Belgium, Canada, Cyprus, Greece, Holland, Hong Kong, Iceland, New Zealand, Malta, Norway, Portugal, Sweden, U.A.E.



PINEAPPLE SOFTWARE

Programs for the BBC model 'B', B+, Master and Master Compact with disc drive

DIAGRAM II - now also available for ARCHIMEDES

Diagram II is a completely new version of Pineapples popular 'Diagram' drawing software. The new version has a whole host of additional features which make it into the most powerful and yet quick to use drawing program available for the BBC micro. The new features mean that 'Diagram II' can now be used for all types of drawings, not just circuit diagrams. Scale drawings are possible and the facilities for producing circles and rubber banded lines together with the pixel drawing routines make any type of drawing possible. This advert has been produced completely using Diagram II.

Summary of Diagram II features:-

1. Works on all model BBC computers and makes use of Shadow memory if poss.
2. Rapid line drawing routines with automatic joins for circuit diagrams.
3. Rubber band line and circle drawing modes.
4. Makes use of the Acorn GXR rom to produce ellipses, arcs, sectors, chords and flood filling.
5. Pixel drawing mode allows very fine detail to be added.
6. Defined areas of screen may be moved, copied, deleted or saved to disc.
7. On-screen cursor position indication allows scale drawings to be made.
8. Keyboard keys may be defined to print User Defined Characters allowing new character sets to be used.
9. Wordprocessor files may be loaded and formatted into defined areas.
10. Up to 650 LDC's if shadow memory available, 381 without shadow.
11. Compatible with Marconi Trackerball and most makes of 'mouse'.
12. All 'Diagram Utilities' are included.
13. Completely 'scaleable' print routines allow any area of the diagram to be printed either horizontally or through 90deg. in scales that may be varied in 1% steps allowing up to 18 mode 0 screens to be printed on an A4 sheet (still with readable text).
14. Smooth scrolling over the whole area of the diagram.

Diagram II consists of a set of disc files and a 16k Eprom. The disc is formatted 40T side0 and 80T side2. Please state if this is unsuitable for your system, or if you require a 3.5" Compact disc

DIAGRAM II - £55.00 + vat P & P free


MARCONI TRACKERBALL

For Model 'B' and B+ (with Icon Artmaster)	60.00	+ vat
For Master 128 (with Pointer Rom)	60.00	+ vat
Bare Trackerball (no software)	49.00	+ vat
Pointer Rom (available separately)	12.50	+ vat
Trackerball to mouse adapters	8.00	+ vat
Postage and Packing on Trackerballs	1.75	

PCB

Pineapple's now famous PCB drafting aid produces complex double sided PCB's very rapidly using any model BBC micro and any FX compatible dot-matrix printer. The program is supplied on Eprom and uses a mode 1 screen to display the two sides of the board in red and blue either separately or superimposed. Component layout screens are also produced for a silk screen mask. The print routines allow a separate printout of each side of the board in an expanded definition high contrast 1:1 or 2:1 scale. The print time is typically about 5 mins. for a 1:1 print of a 7" x 5" board. This program has too many superb features to adequately describe here, so please write or 'phone for more details and sample printouts.

£ 85.00 + vat Plotter driver to suit most plotters £ 35.00 +vat



PCB AUTO-ROUTING

This brand new addition to the PCB program greatly increases the power of the software and speeds the design of PCB's even more. A list of up to 190 connections may be entered in the form of a 'rats nest' and then the computer does the rest! You may specify which side of the board you wish a track to be on or you may leave the choice to the computer, and you may also say whether tracks should be allowed to pass between I.C. pins. The program is in the form of a second Eprom and full features are available on a standard model 'B.' Please write or 'phone for full details.

COMPLETE AUTOROUTE PACKAGE £ 185.00 + VAT
(Including manual Eprom)

ADFS Utilities Rom

ADU is an invaluable utility for all ADFS users. It adds over 22 new commands to the ADFS filing system as well as providing an extensive Menu facility with over 35 sub commands covering areas such as repeated disc compaction, saving and loading Rom images, auto booting of files and many more. Copying of DFS discs onto ADFS discs can be made in one pass with automatic creation of the required directories on the ADFS disc. All functions are fully compatible with Winchester drives including *BACKUP which allows backing up of Winchester onto multiple floppies.

New commands are as follows:- *ADU, *BACKUP, *CATALL, *CHANGE, *DFSADFS, *DIRALL, *DIRCOPY, *DIRDESTROY, *DIRRENAME, *DISCEDIT, *DRIVE, *FILEFIND, *FORMAT, *KILLADU, *LOCK, *MENU, *PURGE, *PURBK, *UNLOCK, *VERIFY, *WFORMAT, *WIPE

PRICE £ 29.00 + vat

MITEYSPICE - Powerful A.C. & D.C. circuit analyser package - £119.00 +vat
with Graphics output. Send for more details

All orders sent by return

VISA

39 Brownlea Gardens, Seven Kings, Ilford, Essex IG3 9NL Tel 01-599 1476

Access

New BATTLE OF BRITAIN

FROM DESIGN PEOPLE SOFTWARE!
Battle of Britain is available on
cassette or 5 1/4" disc.

DISC £12.95 + £1.00 p&p
CASSETTE £9.95 + £1.00 p&p

now available
MIDWAY
in the BATTLEGAME SERIES
£12.95

11th August 1940 ...

Britain stands alone against the German war machine. In July, Adolf Hitler ordered his commanders to prepare plans for the invasion of Britain, named Operation Sealion. The German commanders insisted that they have air superiority over the Channel, or the Royal Navy could destroy the invasion force before it reached the shores of Britain.

BATTLE OF BRITAIN simulates the conflict that ensued. The player takes the place of the commander of the Royal Air Force, whilst the computer takes charge of the German forces. Under your command are the seven sector stations of Fighter Command. You receive reports from your radar stations on the coast, or if these have been bombed out of action, from the Observer Corps. Your forces are replenished from your fighter reserve and by production from aircraft factories — but you will lose both if the factories are bombed.

As if that were enough, bombing raids which penetrate your defences and reach your airfields will wreak havoc. All these and a host of other details are simulated by the Battle of Britain program. Unlike 'Sink The Bismarck' and 'Tanks', 'Battle of Britain' does not include 'combat sheets' as the numbers of planes involved are so large, though it does use disc overlay techniques to allow a larger program.

Reviews:

"Full marks for simulations like this — an intelligent use of the computer that is never boring and doesn't require you to be a wargaming fanatic to enjoy playing ... I do believe that many more of you would enjoy playing Battle of Britain than you might suspect ... I'm eager to see the next in the series!" *A&B Computing, October 1987*

All games are compatible with the BBC B,B+ and MASTER series. All orders will be despatched by return of post.

Design People Software, 77 Grimwade Street, Ipswich, Suffolk, IP4 1LN

4 exciting compilations of the very best programs from the pages of *The Micro User*

TEN of the BEST!

We've brought together the most popular listings which have been published over the last year and created four packages each devoted to a particular subject area. There's entertaining games, handy utilities, clever graphics utilities and powerful ram and disc utilities - all ready for you to put to use without the need for any typing in! You can also list and adapt nearly all the programs - an excellent way to improve your programming skills.

Ten of the Best Ram and Disc Utilities

- Ram Arrays** - Extend the memory available for your arrays in Basic.
- Printer Buffer** - No more waiting for your printer to finish printing with this great utility.
- Prommer** - Put your own Basic programs in rom for instant access.
- Disabler** - Having problems with duplicate rom commands? Cancel out roms with this utility.
- MOT** - Keep your discs in top magnetic condition and rescue corrupted programs.
- Disc Copy** - No more single file copies - this utility makes use of the whole memory.
- Disc Catalog** - Keep track of your disc files with this excellent cataloguing program.
- Disc Protect** - Professional disc protection is yours using this excellent utility.
- Dual Catalog** - Get 56 files on one disc surface with this utility.
- Safe Save** - Prevent overwriting a backup file with this clever checking routine.

Disc price: £4.95

Ten of the Best Graphics Utilities

- MicroWorks** - Create impressive Mode 4 screens with this superb graphics program.
- Pixel Editor** - Fine-tune screen pictures in any mode with this excellent editor.
- Flood Fill** - Fill screen areas with solid colour at remarkable speed.
- Mode 7 Dump** - Print out your Mode 7 screens onto any Epson-compatible printer.
- Slim Characters** - Get 40 characters per line in Modes 2 and 5.
- Special Fonts** - Display 192 fonts on screen with this easy-to-use utility.
- Printer Control** - Modify your printer styles easily from your wordprocessor.
- Dual Screens** - Give your programs the professional look with this double-screen display.
- Characters** - Create your own character sets with this useful utility.
- Charprint** - Use this clever routine to print your own character sets to Epson printers.

Disc price: £4.95

Buy all four discs for **£17.80** and save **£2!**

Ten of the Best Games

- Dino** - Ride the gobblosaurus past all the perils in this magnificent fast-action game.
- Hunkie Egg** - Clamber up the ladders and run along the levels to gather up the eggs.
- Diamond Quest** - Collect all the diamonds in this superb arcade adventure.
- Stellar Rescue** - Defeat the powerful gravity to land your spacecraft in one piece.
- Fruit Machine** - Test your skill and luck on the one-armed bandit with this addictive simulation.
- Karate Warrior** - Delve into the mysteries of the martial arts as you aim to get a black belt.
- Maltese Cross** - Try your hand against the computer in this classic domino game.
- Othello** - Entertain yourself for hours with this very popular oriental board game on your micro.
- Witch Hunt** - Help Olive search the maze to find the 42 keys of Transportal.
- Soccer Manager** - Take on the soccer club's top job in this gripping game of skill.

Disc price: £4.95

(Also available on tape for only £3.95)

Ten of the Best Utilities

- Text Compressor** - Use this excellent utility to reduce the space held by your strings.
- Variable Compressor** - Reduce the size of your variables automatically to save space and improve speed.
- Line Compressor** - Save space in your programs by creating multi-statement lines.
- BOS Editor** - Make editing your Basic program easy with this on-screen editor.
- Basdat** - Convert disc files into Basic data statements and add the resultant lines automatically.
- Basic Repairer** - Rescue your programs after the Bad program error with this useful little utility.
- Line Editor** - Use a single-line word processor in your INPUT statements without changing your programs.
- Circles** - Use this fast and powerful routine to quickly draw filled and unfilled circles.
- Events** - Make your programs respond to real-time events with interrupt-driven Basic routines.
- Stripper** - Remove the line numbers from your Basic programs to allow editing within a word processor.

Disc price: £4.95

PLUS

Every package comes with an easy-to-use machine code version of the Get It Right checksum to enable you to check listings you've typed in.

At only £4.95 each the Ten of the Best compilations represent superb value for money. But you can obtain all four for £17.80 and save £2!

Don't delay - turn to the order form on page 159 to take advantage of this excellent offer.

U·P·D T·E

DTI rapped over schools software

THE Educational Software Publishers Forum has written to the DTI and DES expressing concern over "the lack of a clear government strategy for the future provision of educational computer software in schools – in the light of a substantial commitment to promote leading-edge computer hardware in education".

Background to the publishers' concern is the DES educational support grant for information technology which provides LEAs with £8.5 million for hardware acquisition and £10.5 million for teacher training "but nothing for software". This is due to software currently being covered by DTI funds – but ESPF fears this three-year-old support scheme could end at any time with no replacement in view.

"Even if the scheme continues at its present rate this will only represent five per cent of the total input from central sources and it does not reflect the importance of software generally or the spending patterns that industry and commerce apply to computer projects", says ESPF. "The lack of support will encourage a low opinion of the value of software and encourage unauthorised copying in schools".

Schools are not always prepared to pay realistic prices for software and the limited nature of the market means development costs of £15,000 to £150,000 per package will rarely be covered by UK sales, the report adds.

The publishers say they don't want direct government support for themselves. "However steps need to be taken to make sure that schools spend enough on software – investing £50 to £100 per keyboard per year. Schools have very limited resources but this is precisely the area that the government should be targeting its funds to encourage LEAs and schools to spend more on software".

An additional major problem is the transition from 8 bit to 16/32 bit micros in schools. "It is not clear what central government is doing to promote development around the new computers", says the report. "It is naive to expect industry to invest in developments from which it can see no realistic possibility of a return".

Archimedes chosen

SOUTH Tyneside education authority has adopted the Archimedes as the standard micro for all its schools.

"These machines offer us a high degree of familiarity with the existing and still very useful BBC Micros that have served us so well and reliably over the past seven years", said educational technology advisor Laurie Decyk. "It means

teachers and pupils will feel at home very quickly".

Having a standard machine will also enable maintenance, training and licensing arrangements for applications software to be handled on a central basis. "We'll be able to make use of highly professional audio and image processing techniques in a way we only dreamt of two years ago", said Decyk.

Making perfect . . .

AN aural practice program to help pupils studying for the Royal Schools of Music examinations has been released by Perfect Forth Software (04427 6311). Perfect Forth Aural for the BBC Micro and Master solves the problem of students being unable to practise between lessons due to lack of a skilled pianist.



An example of the detailed graphics from the *Land of Droom*

Wizards and maths

A NEW educational package for the Archimedes, structured to integrate with a school's curriculum, has been released by Resource (0302 63800).

Droom is a text and graphics adventure game that features dragons, trolls, wizards, fairies and witches. The story revolves around Princess Arminda who has been kidnapped by the wicked dragon Droom. Children have to rescue the princess and restore her true love, Prince Henry, who has been turned into a frog.

Although the program is set in the context of a story, progression depends upon the solution of a series of mathematical problems and puzzles. Droom is claimed to be flexible in use in the classroom. Pupils need not complete the adventure in one session as they can leave and re-enter it at any stage.



Word processing for the primary school

Program: PromptWriter
 Price: £3
 Supplier: MESU, Unit 6, Sir William Lyons Road,
 Science Park, University of Warwick, Coventry CV4
 7EZ.
 Tel: 02034 16994

PROMPTWRITER is an updated software package which has revitalised the two earlier word processors produced by the Micro Electronics Programme. The MEP was set up in 1983 on a regional basis and initially provided tape packages of wide variety and quality. This trail-blazing activity was never totally successful in later years although there were some significant projects.

The MEP has now been superseded by the Micro-Electronics Education Support Unit – MESU – and it is responsible for the presentation of the

PromptWriter package which contains three discs, a manual and 18 double-sided overlays for A4 or A3 sized Concept Keyboards.

On loading the first disc it is possible to call up either Prompt or Writer by typing the required initial letter. Having done this you can start writing almost immediately. If there are any difficulties the straightforward, well-illustrated manual will cater for all but the most intricate problems.

Prompt is aimed at younger children or those who have difficulty presenting their thoughts cogently. Writer on the other hand is able to be used throughout the primary age range.

Disc two contains the utilities and files for the Concept Keyboard overlays which will be of great benefit to the younger or less able pupils. A wide variety of overlays are available: Firstly individual letters, then individual groups of words and pictures. Next there are word exercises and problems putting sentences in correct order. Finally

Through the selection jungle


Program: Degree Course Guides
 Price: £3.50 each
 Supplier: Hobsons, Bateman Street, Cambridge
 CB2 1LZ.
 Tel: 0223 354551

SOONER or later you get to notice that the educational ladder appears to have a number of rungs missing at crucial points. When you move up from primary to secondary school, for example, it seems an enormous jump from being top class in the school to the littlest fish in a big and pretty frightening pond.

But the most awesome jump of all comes when you have to decide on which course to take at which college or university when you're just touching 18 – an adult with L plates on.

Not only are there nearly 50 universities in the UK, there are polys, colleges of further education, and other institutions all offering degrees of every shape and size in courses ranging from astronomy to zoology.

It's a really bewildering choice, not least when it dawns on you that you're also going to be left to your own devices for a place to live, managing your own bank account and much, much more. In

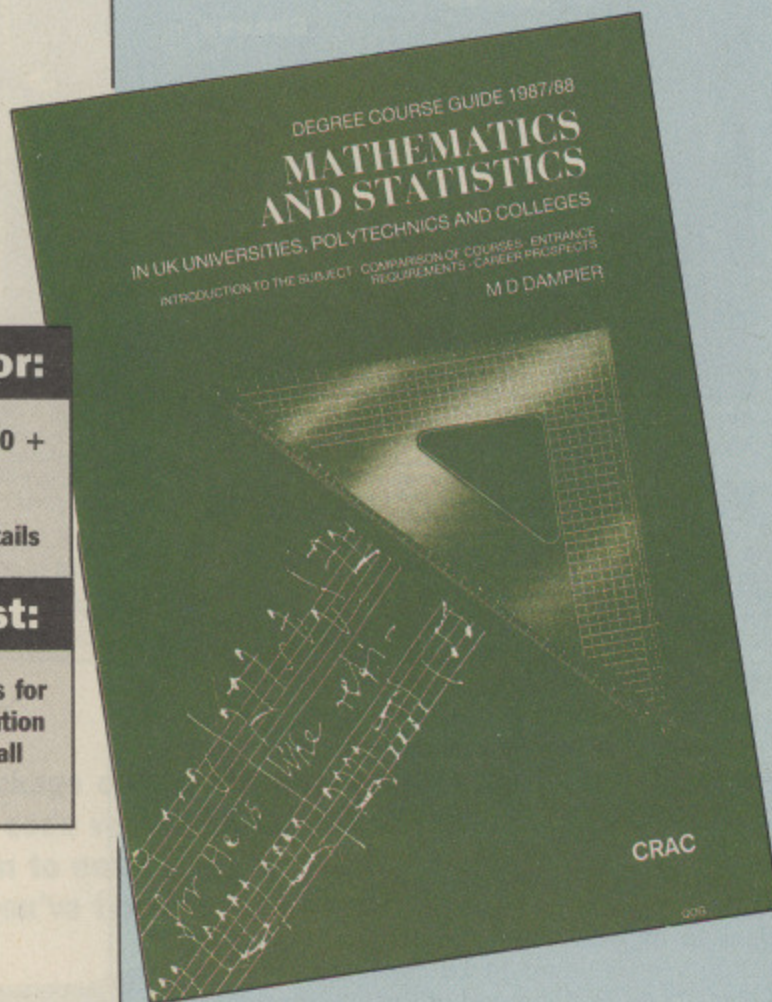

Points for:

- Covers 2,000 + institutions
- Gives quick access to details

...against:

- Only searches for course/institution
- Doesn't give all the facts

some sentences to begin or finish a story are presented to help stimulate creative writing.

The third disc contains sample files that can be loaded to give examples of work or for presenting the pupils with Cloze procedure exercises. Finally, at the back of the manual, are samples of the various types of print available.

The larger print sizes are based on those developed by Paul Blenkhorn of the Research Centre for the Physically Handicapped. One slight criticism here is the print speed, which is very slow. Also if used for any length of time the printer ribbons very quickly deteriorate. The original idea for Prompt came from Bob Dyke and for Writer from Anita Straker.

The package costs £3, or £2.50 each for four or more. I feel it is a worthwhile and essential component for any school wishing to establish a computer software library. The price level means that it could be bought by all schools or on a county basis.

At present there are a number of excellent word processors on the market, particularly impressive being Tedimen's Folio and Sherston's Typesetter. Prompt and Writer are less sophisticated and basic but are also simpler to use and written work can be produced with little or no preparation. The manual, too, is clear, precise and encouraging for the non-specialist teacher.

Gareth Gillingham



Points for:

- Very easy to use
- Has utilities disc
- Low-cost word processor

...against:

- Less sophisticated than some other word processors

such circumstances, anything that can help you pick your way out of the blackboard jungle into the college and university jungle would be a boon from heaven.

And that's just what this guide on a disc or rather string of discs, does to perfection. It's an excellent browser for the sixth former in pursuit of any one of more than 2,000 courses in colleges, universities and institutions all over the UK.

Clearly, the package can't offer minute details of each and every course in the land, but its sensible menu-driven system – which, as far as I can determine, is pretty indestructible – offers a reasonable level of introductory information on each course, or group of courses.

At the highest menu level you are invited to choose between one of 23 subjects or groups of subjects – excluding medicine and dentistry. Once you've homed in on a particular subject area you are presented with a rolling list of the institutions which offer the course you're interested in.

At the next level, you choose a particular institution and you can then opt for the following:

- **General details:** You're given the UCCA number of the course, who validates it, the kind of course(s), the length, and whether recognition by a professional body is involved. Sensibly, the guide at this point tells you to consult the appropriate printed guide for fuller details.

- **Transfer details:** In this category, information is offered on whether you can transfer within the institution, what happens if you fail to enter the Honours part of the course, and whether you can transfer to the course from another institution.

- **Entrance and selection:** These include normal entry qualifications required, if there is a stan-

dard offer made by the institution, whether candidates are interviewed, and, if so, in what circumstances, and whether mature applicants or potential students with unorthodox qualifications are considered.

All in all, an invaluable use of the computer. The only grouse is that it would have been nice to access the information on the basis of different criteria from course then institution. But then I'd have nothing to grumble at. And that would never do.

Rex Last

TABLE Selection procedure

6

Key:

- A: Offers of places made on basis of application form
- B: Those offered places invited for informal visit
- C: Offers of places made after interview
- D: Those considered suitable candidates interviewed
- E: Those considered borderline candidates interviewed
- F: Mature candidates and special cases interviewed

Institution	Title of course	A	B	C	D	E	F
Aberdeen	Mathematics	*	*				*
Bath	Mathematical sciences			*	*		
	Mathematics			*	*		
	Mathematics and computing			*	*		
	Statistics			*	*		
Birmingham	Mathematics	*	*	*			*
	Mathematics and computer science	*	*	*			*
	Pure mathematics	*	*				
Bradford	Mathematics	*	*				*
	Mathematics and statistics	*	*				*
Brighton Poly	Combined sciences: mathematics	*	*				*
	Combined sciences: statistics	*	*				*
	Mathematics for decision making	*	*			*	*
Bristol	Computer science with mathematics	*	*			*	*

Some of the courses available



Computaccount (UK) Ltd
11 High Street, Harborne
Birmingham B17 9NT
Tel: 021 427 9898

We are major suppliers to the educational and health sectors

Please telephone for our free extensive catalogue and price list. Hundreds of products listed at excellent prices.

Archimedes

THE NEW RISC COMPUTER FROM ACORN. A VERY FAST 32 BIT MACHINE, SPECIFICALLY AIMED AT THE EDUCATION MARKET COMPATIBLE WITH MOST EXISTING BBC SOFTWARE

	Base model	+ Mono monitor	+ Colour monitor
Archimedes 305 512k RAM, 512K ROM, 1Mbyte 3.5" drive	£699	£749	£899
Archimedes 310 As 305 but 1024k RAM	£775	£825	£975
Archimedes 410 As 310 but with hard disc controller floating point option, coprocessor bus.	£1399	£1449	£1599
Archimedes 440 As 410 but 4048k RAM 20Mbyte hard disc	£2299	£2349	£2499

ACORN

NEW MASTER COMPACT series. Standard system is 128k, single 3.5 inch drive, bundled software.

Compact entry system	£349.00
Compact TV system	£359.00
Compact with mono monitor	£389.00
Compact with colour monitor	£529.00
RS 232 interface for compact	£26.00
Extra 3.5in drive for compact	£99.00
PAL TV adaptor for compact	£26.00
Master 128	£379.00
Master ET	£305.00
Master econet module	£43.47
Turbo upgrade	£108.00
64K upgrade kit	£34.74
Master 512K upgrade	£199.00
Level 1 file service	£86.00
Level 2 file service	£199.00
File Store E01	£799.00
File Store E02 (20mb)	£600.95
Eprom cartridges	£11.95
Acorn DNFS kit	£82.60
1770 upgrade kit	£43.42
ADFS ROM	£26.04
ATPL Sideways RAM/ROM board	£39.00
CONCEPT Keyboard	£124.95
View manual	£10.00
Viewsheet manual	£10.00

DISC DRIVES

Opus 5802 400k DS 40/80 track	£109.00
Opus 5802DB dual 400k DS40/80 track	£205.00
Opus 5802D dual 400k DS 40/80 with PSU	£260.00
Opus DDO5 kit	£59.95
Pace PSD3P 400k 40/80T with PSU	£144.00
Pace PDD3P dual 400k 40/80T with PSU	£260.00
Akhter MD802E dual 400k DS 40/80T mounted in monitor stand	£285.00
Cumana CSX100 100k SS 40T	£99.00
Cumana CS100 100k SS 40T with PSU	£129.00
Cumana CS400S 400k DS 40/80T with PSU	£152.00
Cumana CD800S dual 400k SS 40T with PSU	£295.00
Cumana CS354 SS 3.5" with PSU	£121.70
Cumana CD358 DS 3.5" with PSU	£210.00
Cumana CCD2000S 3.5" + 5.25" with PSU	£282.17

MONITORS

Mono	Price
Sanyo DM4112	£79.95
Sanyo DM9112	£126.00
Phillips green Hi-res 7502	£85.00
Phillips amber Hi-res 7522	£85.00
Zenith green Hi-res 1230	£85.00
Zenith amber Hi-res 1220	£85.00
Colour	
Microvitec std-res 1431	£191.00
Microvitec med-res 1451	£229.00
Microvitec hi-res 1441	£399.00
Phillips 8833 RGB Med-res + composite video	£251.00
Monitor cables (state type required)	
Master Monitor bridge single height	from £3.50
double height	£25.00

AMSTRAD

* New 1640 now in stock *

Amstrad 1640	
Enhanced colour display	
Single 360k floppy drive	£799.00
Twin 360k floppy drives	£899.00
Single 360k floppy drive + 20Mbyte hard disc drive	£1199.00
Colour Twin floppies	£649.00
20Mb Hard Drive	£260.00
PCW 8256	£299.00
PCW 8512	£399.00
PCW 9512 with Daisywheel printer	£499.00
Amstrad 3" discs box of 10	£28.00
SOFTWARE:	
Call for full list of IBM Compatible and Amstrad software	

PRINTER ACCESSORIES

Epson FX 100/105 Sheet Feeder	£139.00
Brother HR sheet feeder	£209.00
Epson MX/RX/FX 80 Ribbons	£3.75
Epson MX/RX/FX 100 Ribbons	£4.50
Canon PW 1080/1156 Ribbons	£5.00
Taxan Kaga KP810 Ribbons	£5.00
Citizen printer ribbons	from £3.99
All Epson Spares available	EPOA
Massive range of other compatible ribbons available	

BOOKS

Wide range of computer books now in stock for:-
BBC
ARCHIMEDES
MSDOS
ARM
AMSTRAD

PRINTERS

DOT MATRIX	
Epson LX800 150cps 80col NLQ	£229.00
Epson FX800	£324.75
Epson FX1000	£453.75
Epson EX800 (optional colour)	£457.88
Epson EX1000 (optional colour)	£614.63
Epson LQ 800 180cps 24 pin matrix NLQ	£479.00
Epson LQ 1000 180cps 24 pin 132 col NLQ	£659.00
Olivetti DM100 80col NLQ 120cps	£225.00
Olivetti DM280 80col NLQ 160cps	£349.00
Canon PW1080A NLQ 80col 160cps	£258.00
Brother 1109 Par + Ser 100cps + NLQ	£209.00
Brother 1409 Par + Ser	£349.00
Brother 1509 Par + Ser 180cps + NLQ	£449.00
Brother 2024 Par/Ser NLQ 24pin 160cps	£750.00
Star NL 10 NLQ 80 col 120cps	£239.00
Star NX 15 NLQ 132 col 120cps	£330.65
Star SD10 NLQ 80col 160cps	£330.65
Star SD15 NLQ 132col 160cps	£415.65
Star NB2415 NLQ 24 pin 216cps	£645.15
Star NB15 NLQ 24pin 300cps	£806.65
Citizen 120D 120cps NLQ 80col	£179.00
Citizen LSP100 120cps Eps/IBM comp NLQ	£225.00
Citizen MSP 10E 160cps Eps/IBM comp NLQ	£279.00
DMP 3160	£189.00
DMP 4000	£299.00
LQ 3500 24 pin	£299.00
MSP 1SE	£329.00
HQP 40 24 pin	£495.00
HQP 45 24 pin	£595.00
Panasonic KX-P 1081	£279.00
Panasonic KX-P 1090	£233.00
Panasonic KX-P 1092	£315.00
Panasonic KX-P 1592	£405.00
Micro-P MP165 NLQ	£208.70
Micro-P MP200 "NEW"	£299.00
Parallel printer cable BBC	£9.00
Parallel printer cable IBM etc from	£15.00
DAISY WHEELS	
Sanyo PR3000	£199.00
Sanyo PR5200	£299.00
Brother HR20	£399.00
Brother HR25	£480.00
Brother HR35	£825.00
Juki 6100	£299.00
Juki 6200	£454.00
Juki 6300	£694.00
Juki 2200 typewriter/printer	£238.00
Star Powertype 165 col 18cps	£219.00
LASER	
Epson GQ3500	£1595.00
Citizen Overture	£1750.00
Kyocera 1010	£2495.00
Kyocera 2010	£4595.00

OPUS PC

PC3 SF Mono 256k	£499.00
PC3 TF Mono 768k	£699.00
PC3 HD Mono 1024k	£995.00
PC5 (AD) HD Mono 1024k	£1295.00
EGA System available - please add	£300.00

BBC ROM SOFTWARE

InterWord	£48.00
Intersheet	£48.00
Interchart	£28.50
Interbase	£59.00
Acorn	
View 2.1	£45.00
View 3.0	£63.00
ViewPlot (Disc)	£25.75
ViewSpell	£33.50
Viewsheet	£45.00
Viewstore	£45.00
GXR (please state whether for B or B+)	£23.00
ISO Pascal	£52.00
LISP	£39.00
BCPL	£46.00
Logo	£52.00
ADFS	£26.04
Computer Concepts	
Wordwise Plus	£40.00
Printmaster	£25.00
Accelerator	£48.00
Speech ROM	£27.50
Spellmaster	£46.00
Beebugsoft	
Toolkit Plus	£33.00
Wordbase	£25.00
ICON Master	£29.00
ROMIT	£29.00
Help II ROM	£27.00
Sleuth ROM	£27.00
Exmon II	£28.00
Spellcheck III	£32.00
MUROM	£24.00
Pace	
Commstar	£29.57

AMX

Please state whether for BBC or Master	
AMX mouse with Super Art ROM	£78.00
Stop Press	£43.43
Paintpot	£13.00
Desk	£21.70
Super Art ROM	£43.43
Database	£21.70
3D Zicon	£21.70
Utilities	£13.00

ARCHIMEDES SOFTWARE

System Delta Plus Database	£89.95
System Gamma Plus Graphics	£69.95
System Delta Account (per module)	£64.95
School Administrator	£79.95
Video Rental	£69.95
Newsagent	£69.95
Clare's AlphaBase	£49.95
Clare's Image Writer	£29.95
Archimedes Tool Kit Module	£39.95

SPECIAL SOFTWARE

Torch Turbo Library functions and procedures for Turbo Pascal to access the power of Torch/BBC facilities Newnet
Powerful friendly Torchnet management software with password protection etc. dBase special
dBase helper program now available for those who want to access the powerful facilities in dBase, without having to learn how to program in dBase

HOW TO ORDER

Payment by cheque to:
COMPUTACCOUNT (UK) LTD

Carriage: Items less than £50: £2.50, £50-£100: £4.50
Carriage and insurance on items more than £100: £9.50

Please add VAT at 15% to Total, including Carriage

Send to Computaccount (UK) Ltd., 11 High Street, Harborne, Birmingham B17 9NT
or Telephone 021-427 9898 with your Access details

NAME

ADDRESS

Quantity

Item

Price

£

£

£

£

£

£

Total £

Lots for a low price in DTP


Product: Pixel Perfect
 Price: £29.50 Art Pack, £12.50 Font Discs £9.50 each
 Supplier: AVP, School Hill Centre, Chepstow, Gwent NP6 5PH.
 Tel: 02912 5439

PIXEL Perfect is a desktop publishing package of almost awesome proportions yet it will fit into any BBC B. Pages are created directly on to a Mode 0 screen and this should meet every conceivable need of the most ardent DTP enthusiast – but there is a price to pay. The package works around a Page Disc that contains various routes to other features. When you start up you are presented with a view of about 20 per cent of the total page – the maximum amount you can do any practical work on at once – so your page must be dealt with as six slightly overlapping sections.

In this initial mode you can fill various areas with patterns, draw pretty borders, create any regular polygon and type text into the boxes. However, to scroll the page, use various fonts, print, import artwork, cut and paste and so on you must start the tedious job of disc swapping.

Despite this, the available features deserve closer attention. Text is at the heart of any DTP package and this one offers you two main modes of input. The first is text formatting where you create a box of the size and position of your choice. This uses a rather complex set of keys, the arrow keys for size and z,x,* and ? for movement. I found this consistently awkward and am sure that there must be a better solution.

It is in this area that the package falls down. Once your box is created you type on to an input

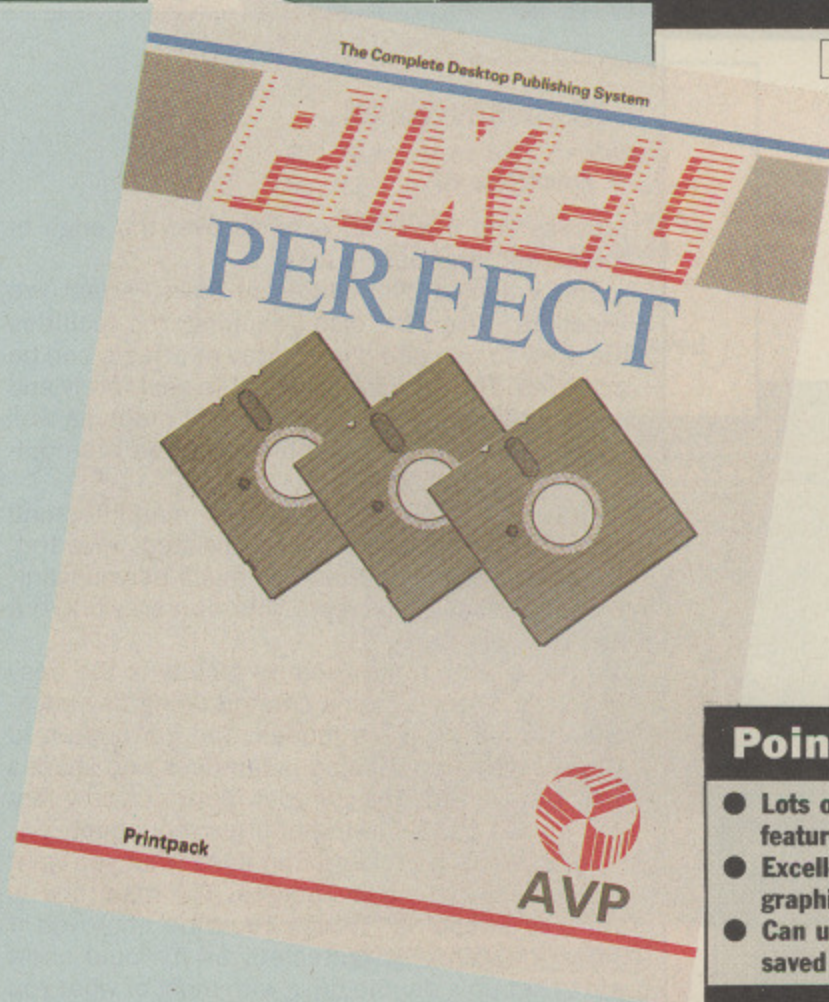

Points for:

- Lots of useful features
- Excellent graphics facilities
- Can use any saved screens

...against:

- Too much disc swapping
- Easy to lose bits of text
- Tricky to use


line at the base of the screen. At the end of each you must press Return and the line is placed in the box. The problems with this are that there is no audible warning when you reach the end of the line, and no automatic entry of word-wrap – all very irritating.

Neither is there any warning when you approach the bottom of the box – further lines are just printed over the existing bottom line.

The second method of text entry is to use a font. This allows you a great degree of flexibility, as size may be defined and text may be entered horizontally or vertically. Three are supplied with the initial package and others can be bought or you can design your own.

Drawing your letters is slow but there is a faster option which only works in one size. Creating page-wide headlines is not an easy task as the page has to be scrolled half-way through the

Turn to Page 68 ▶

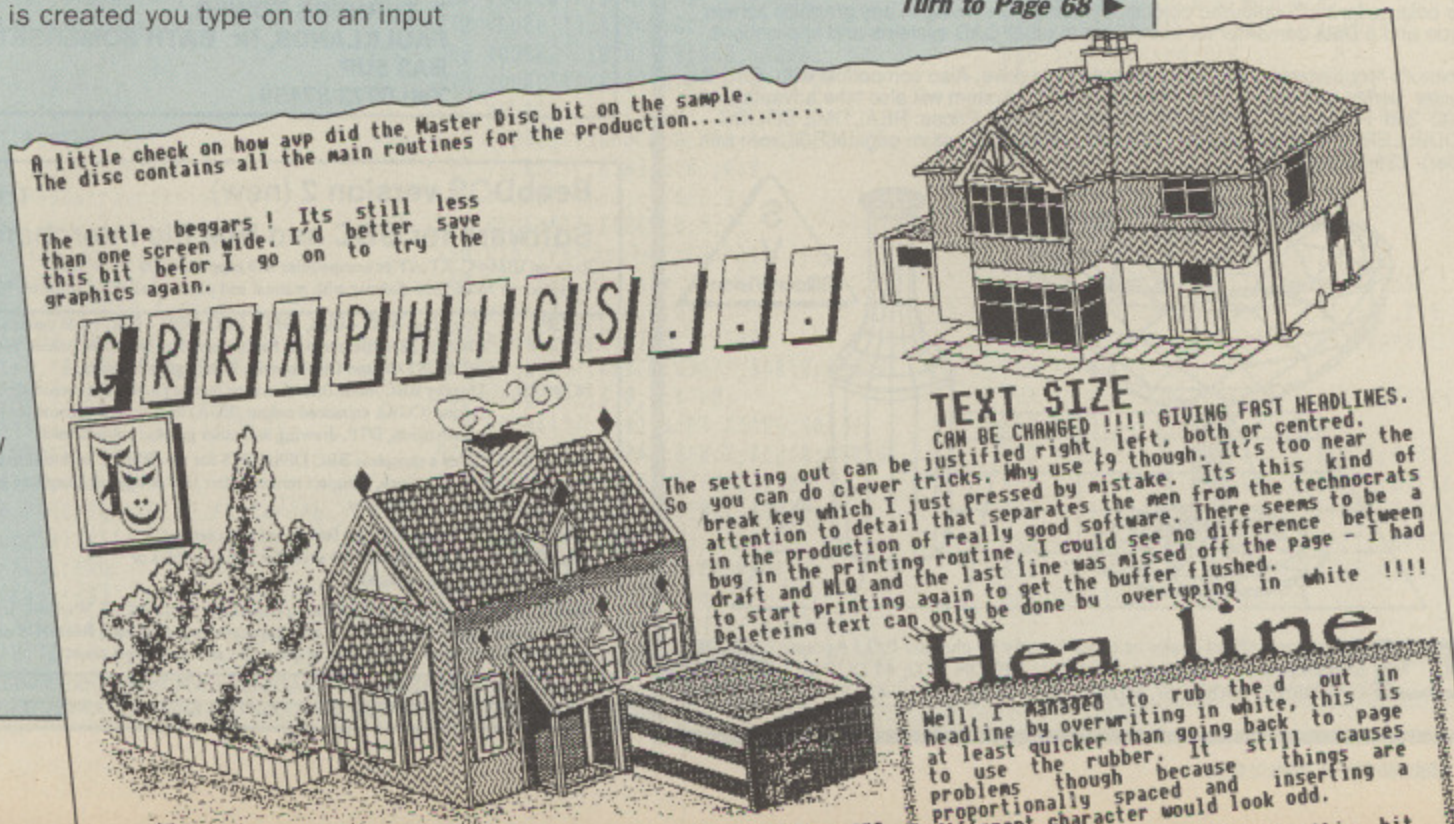

A printout from a trial run on Pixel Perfect

A little check on how avp did the Master Disc bit on the sample. The disc contains all the main routines for the production.....

The little beggars! Its still less than one screen wide. I'd better save this bit before I go on to try the graphics again.

GRAPHICS... . . .

TEXT SIZE CAN BE CHANGED !!!! GIVING FAST HEADLINES. CAN BE JUSTIFIED right, left, both or centred.

The setting out can be justified right, left, both or centred. So you can do clever tricks. Why use {9 though. Its too near the break key which I just pressed by mistake. Its this kind of attention to detail that separates the men from the technocrats in the production of really good software. There seems to be a bug in the printing routine. I could see no difference between draft and MLQ and the last line was missed off the page - I had to start printing again to get the buffer flushed. Deleting text can only be done by overtyping in white !!!!

Hea line

Well, I managed to rub the d out in headline by overwriting in white, this is at least quicker than going back to page to use the rubber. It still causes problems though because things are proportionally spaced and inserting a different character would look odd.

◀ From Page 67

process and if a letter extends over the edge of the screen that part is lost.

The graphics capabilities of Pixel Perfect are excellent. Given the disc swapping, the facilities are easy to use and a vast array of effects can be achieved. The art pack is available separately and contains icons, borders and useful maps as well as some less useful graphics such as a smouldering cigarette.

Pictures can be cut and pasted, magnified and altered, as well as reflected, twisted, inverted, enlarged and manipulated as much as you want. There is a facility to create your own art work, but this is rather basic.

A more useful and exciting facility is the easy import of whole screens created using any package in other graphics modes. The conversion to Mode 0 and grey shading is faultless and shades may be inverted. The printout routine is very fast and makes page viewing utilities redundant.

Here is a DTP package that does what you want – but there are disadvantages. The main one is the disc swapping. Things could be improved if the discs were not protected, as it would allow you to set up a double drive with most of what you wanted immediately accessible. Also the lack of backup copies is bound to cause the harassed teacher problems with six discs floating around,

although AVP does provide a quick and efficient replacement service.

Making the quick changes you might need is complex and could require the slow major exercise of re-composing a page. You can overcome this by importing text from other packages but this would diminish the free-wheeling, hold the front page activities that DTP can promote.

Other annoying features do exist, such as the need for regular saving – scroll an unsaved section of a page and you will lose it. There is also no built-in provision for a mouse which might have helped with box creation. AVP thinks that users could easily adapt the package to use a joystick.

A network version is available on request with the price negotiable regarding the number of stations you have – a nice touch. Other extensions are in the pipeline too.

If you want a comprehensive package and have a fairly long lead time for your newsletters, magazines and so on, then Pixel Perfect could be the answer – especially with its low entry price. Programmers take note that utilities are included to use the fonts and graphics to jazz up your own programs in any mode.

As a DTP package for education you will need to think very carefully, especially for the lower age range. But as a teacher's tool for producing worksheets it could prove invaluable.

Marshal Anderson

The bottom line...

Rather difficult for the average pupil, but ideal for producing worksheets.


REALTIME SOLIDS MODELLER

Reviews of the original REALTIME GRAPHICS SYSTEM:
"there is no other software to rival it"-Beebug.
"there is no better package"-Acorn User.


The complete 3D Solids/Wireframe package for architectural design, art design, interior design, teaching CDT and 3D geometry, molecular modelling, mathematical plots, scientific processing and high speed flicker-free 3D animation. Unlike other packages this system can perform full colour hidden-surface removal at high speed.

The package consists of a 32k Realtime Graphics Language rom with 52 star commands; 6 discs providing 3D CAD, Plotter drivers for all plotters including HP-GL and Plotmate, Demonstrations, Applications facilities and Database Libraries; and a 150 page manual. Design facilities include menu driven 3D Solid/Wireframe Editors to design objects with lines and surfaces, create symmetrical objects by Sweeping or Extruding simple sections, use objects as building blocks to create more complex objects which in turn may be used as building blocks, specify individual surface and line colours for multi-coloured objects, dynamic 3D viewing in any graphics screen mode and a Data convertor for interfacing to other CAD systems and applications.

Minimum requirements: BBC B/keyboards/single drive. Also compatible with BBC B+, Master series, all versions of DFS & DDFS. The system will also take advantage of a 6502 2nd Processor/Turbo or AMX/QUEST Mouse. Prices: REALTIME SOLIDS MODELLER: £89.95 (inclusive); SOLIDS UPGRADE (return original RGL rom with order): £39.95 (inclusive).

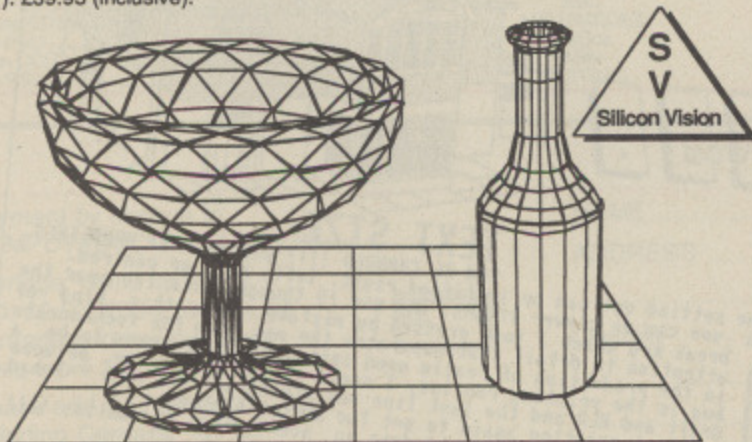

Contact your local dealer or order directly by cheque/P.O./Access/Mastercard/Eurocard from: SILICON VISION LTD, 47 DUDLEY GARDENS, HARROW, MIDDX, HA2 ODQ. Tel: 01-422 2274.



EDUCATIONAL SOFTWARE * BARGAIN PRICES *

TITLES	CODE	RRP (Case)	Our Price	TITLES	CODE	RRP (Case)	Our Price
Maths Pack	B.E	11.95	2.99	Nursery Rhyme	B	9.95	2.49
Pick a Word	B.E.C	9.95	2.49	The Basic Lesson	B.E	11.95	2.99
Jigsaw Puzzle	B.E.C	9.95	2.49	The Graphic Lesson	B.E	11.95	2.99
Sliding Block Puzzle	B.E.C	9.95	2.49	Utility Pack	B.C	7.95	2.49
Colour Snap	B.E.C	11.95	2.99	Drawing Pictures + Puzzles	B.E.C	11.95	2.99
Shape Snap	B.E.C	11.95	2.99	Learning Compendium I	B.E.C	11.95	2.99
One Two Three Snap	B.E	11.95	2.99				

B= BBC, E= Electron and C= Concept keyboard

New Cased 3" Disc Drive £50.00
Torch Z80 ZEP 100 Second Processor £75.00

Postage: Software £1, (over 6 titles free), Drives £2.50, Z80 £1.50
Trade and Education Enquiries Welcome.

Letters/Cheques to:
MEYERS LEISURE PRODUCTS
7, TURNERS TOWER,
FAULKLANDS, Nr. BATH SOMERSET
BA3 5UP
Tel: 0373 87459



BeebDOS version 2 (new) from MicroBoss

Software for BBC and IBM file interchange

Runs on IBM-PC-XT-AT or compatibles and supports DOS 2.0 or later
Supplied on 360K IBM diskette with manual and plastic wallet the software includes:

BCOPY	Copy files BBC - IBM, IBM - BBC, BBC - BBC (wild cards allowed)
BCONV	Flexible IBM file translate facility enabling text to be passed between VIEW, WORDSTAR and Displaywrite 3 amongst other uses.
BGRAPH	Display BBC mode 0,1,4,5 screen format (AMX Art included) files on IBM standard colour (CGA), enhanced colour (EGA) or Hercules screens for use in IBM PC presentation, DTP, drawing and other graphic applications.

BeebDOS is almost a complete BBC DFS/ADFS for the IBM PC with utilities to catalogue, format, backup, delete, lock, unlock, compact rename, alter title & options, map free space, change and create directories of BBC diskette/files.

In fact BeebDOS is probably the fastest and most powerful BBC/IBM PC file transfer method available and no cables or serial connections are required.

£39.99
Inclusive

BBC double density diskette formats supported are Acorn ADFS, Watford, Solidisk, OPUS DDOS and UDM. Acorn single density DFS is only supported when running BeebDOS on an IBM AT or XT286 with a 360k disk drive. Please send or phone for an information sheet

CHEQUE OR POSTAL ORDER TRADE/EDUCATION ENQUIRIES WELCOME
MICROBOSS LTD 3 HADLEIGH RD FRINTON ESSEX CO13 9HG TEL (0255) 671095



Style plus fun minus tedium equals success

Wyn Middleton points the way to mellow maths

TEACHING young children to read and write numbers needs infinite patience, an attribute the BBC Micro possesses in abundance. It never gets tired or angry and, as long as the job it's trying to do is simple, it can carry the task out very successfully.

Counting with Charlie is a simple entertaining way to drill in the concepts of numbers for children who can recognise the figures one to nine. Type in the listing, and ensure there are no typing errors with Get it Right!

When run the program asks you to press the number key that matches the number of fruit shown on the screen. Charlie keeps a track of the number of right answers.

MAJOR VARIABLES

R	Number of fruit to display
RR	Last number of fruit chosen
score	Number of correct answers
t	Time to pause in seconds
C%	Colour of fruit
V%	Volume of sound
PS	Current fruit being displayed
s\$	What Charlie says



How many apples ?



That's right!

Counting the fruit

MAJOR PROCEDURES

apples	Set up apple display
bananas	Set up banana display
charlie	Draw Charlie on the screen
end	Display the end message
jingle	Play the merry jingle
pause	Wait for a while
right	Tell player he is right
say	Display a speech bubble
setup	Prepare main characters
strawberries	Set up strawberry display
title	Put title page up
wrong	Tell player he is wrong

```

10 REM Counting with Charlie
20 REM by Wyn Middleton
30 REM (c) The Micro User
40 ON ERROR MODE7:REPORT:PRINT" at Li
ne ";ERL:END
50 MODE1:VDU19,1,5;0;
60 VDU23;8202;0;0;0;:*FX11
70 PROCsetup:PROCTitle
80 REPEAT
90 FOR NX=1 TO 4
100 FOR ZX=1 TO 3:CLS
110 IF ZX=1 PROCapples
120 IF ZX=2 PROCbananas
130 IF ZX=3 PROCstrawberries
140 PROCcharlie(4,3):COLOUR2
150 PROCsay("How many "+PS+"?")
160 RR=R:REPEAT R=RND(9)
170 UNTIL R<>RR:VDU19,3,C%;0;
180 COLOUR3:FOR PX=1 TO R
190 VDU31PX*4,10,224,225,226
200 VDU31PX*4,11,227,228,229
210 VDU31PX*4,12,230,231,232:NEXT
220 REPEAT GX=GET-48
230 UNTIL GX>0 AND GX<11
240 IF GX=R PROCright ELSE PROCwrong
250 PROCcount(R):NEXT:PROCend
260 UNTIL FALSE:END
270 DEF PROCsay(s$)
280 LOCAL LX:LX=LENS$*32
290 PRINTTAB(10,4)s$;
300 GCOL0,2:MOVE310,850
310 DRAW318+LX,850:DRAW318+LX,915
320 DRAW310,915:DRAW310,890
330 DRAW270,880:DRAW310,870
340 DRAW310,850:ENDPROC
350 DEF PROCapples
360 VDU&E017;0;&F03;&71F;&300;
370 VDU&E117;0;&2040;&CF93;&C7FF;&D710;
380 VDU&E217;0;&F0F0;&C0;&8000;
390 VDU&E317;&F07;&F0F;&F0F;&707;
400 VDU&E417;&FF07;-1;-1;-1;
410 VDU&E517;&E0C0;&E0E0;&E0E0;&C0C0;
420 VDU&E617;&303;&101;0;0;
430 VDU&E717;-1;-1;&EE;0;
440 VDU&E817;&8080;0;0;0;
450 CX=2:PS="apples":ENDPROC
460 DEF PROCbananas
470 VDU&E017;0;0;0;0;
480 VDU&E117;&101;0;0;&100;
490 VDU&E217;&FFC0;&367F;&D050;&B0D0;
500 VDU&E317;0;0;0;&100;
510 VDU&E417;&301;&603;&3D0E;&DF7B;
520 VDU&E517;&60A0;&E060;&C0C0;&8080;
530 VDU&E617;&7E0F;&7F81;&F;0;
540 VDU&E717;&3EDF;&E0FC;&880;0;
550 VDU&E817;0;0;0;0;
560 CX=3:PS="bananas":ENDPROC
570 DEF PROCstrawberries
580 VDU&E017;0;&300;&1F0F;&3F1F;
590 VDU&E117;&1008;&FF10;&BFFF;&FFDD;
600 VDU&E217;0;&C000;&F8F0;&FCF8;
610 VDU&E317;&3F3F;&3F3B;&1F1F;&F0F;
620 VDU&E417;&F7FF;&DFFF;&FBFF;&FFBF;
630 VDU&E517;&DCFC;&FCFC;&F8D8;&F0F0;
640 VDU&E617;&307;1;0;0;
650 VDU&E717;&EFF;&FBFF;&3C7E;&18;
660 VDU&E817;&C0E0;&80;0;0;
670 CX=1:PS="strawberries":ENDPROC
680 DEF PROCend:CLS
690 PROCjingle:PROCcharlie(4,3)
700 PROCsay("You got "+STR$score+" out
of 12")
710 PROCpause(2):COLOUR2:*FX21
720 PRINTTAB(7,14)"Press a key...";
730 ZX=GET:PROCjingle:ENDPROC
740 DEF PROCcharlie(CX,YX)
750 COLOUR2:VDU31XXYX,233,234,235
760 COLOUR5:VDU31XXYX+1,236,237,238
770 VDU31XXYX+2,239,240,241:ENDPROC
780 DEFPROCsetup
790 VDU&E917;&100;&1F07;&3F1F;&1F3F;
800 VDU&EA17;&9900;-1;-1;-1;
810 VDU&EB17;&8000;&F8E0;&FCF8;&F8FC;
820 VDU&EC17;&781F;&7878;&7F78;&1F1F;
830 VDU&ED17;&C3FF;&BD99;&99BD;&FFC3;
840 VDU&EE17;&1EF8;&1E1E;&FE1E;&F8F8;
850 VDU&EF17;&1F1F;&1F1F;&70F;&103;
860 VDU&F017;-1;0;-1;-1;

```

Turn to Page 70 ▶

◀ From Page 69

```

870 VDU&F117;&F8F8;&F8F8;&E0F0;&C0;
880 ENVELOPE1,0,0,0,0,0,0,0,126,-4,0,-
2,126,95
890 VX=-8:ENDPROC
900 DEF PROCtitle:CLS
910 COLOUR1:COLOUR130
920 PRINTTAB(12,5)"C O U N T I N G"
930 PRINTTAB(16,7)"W I T H"
940 PRINTTAB(13,9)"C H A R L I E"
950 COLOUR128:PROCcharlie(18,13)
960 COLOUR2:PROCpause(4)
970 PRINTTAB(11,21)"Press a key...";
980 ZX=GET:CLS:score=0:R=0
990 ENDPROC
1000 DEFPROCright
1010 GCOL 0,1:MOVE 800,300
1020 DRAW 900,250:DRAW 1050,400
1030 COLOUR2:PROCjingle
1040 PRINTTAB(8,22)"That's right!"
1050 PROCpause(2):score=score+1
1060 ENDPROC
1070 DEF PROCwrong
1080 LOCAL @X:GCOL 0,1
1090 MOVE 850,400:DRAW 1050,200
1100 MOVE 850,200:DRAW 1050,400
1110 COLOUR2:PRINTTAB(0,22)"No, there a
re "R,SPTPS"."
1120 SOUND1,VX,10,5:SOUND2,VX,15,5
1130 SOUND1,VX,1,6:SOUND2,VX,6,6
1140 PROCpause(2):ENDPROC
1150 DEF PROCcount(NX)
1160 LOCAL CX,@X:FOR CX=1 TO NX
1170 PRINTTAB(CX*4+1,14)CX

```

```

1180 SOUND1,1,CX*10+40,5
1190 PROCpause(.5):NEXT:ENDPROC
1200 DEF PROCjingle
1210 RESTORE:LOCAL DX,NX,PX
1220 FOR NX=1 TO 10:READ PX,DX
1230 SOUND 1,1,PX,DX:NEXT:ENDPROC
1240 DEF PROCpause(t)
1250 LOCAL TX:TX=TIME+t*100
1260 REPEAT UNTIL TIME>TX:ENDPROC
1270 DATA100,1,110,1,120,1,130,1,140,1
1280 DATA150,4,120,2,110,2,100,2,120,3

```



10 = 00	230 = 4910 3	450 = 732B D	670 = 373F 4	890 = 75B2 7	1110 = CA6C 8
20 = 00	240 = 593D 1	460 = 2982 8	680 = 26B 0	900 = DFBA C	1120 = F216 2
30 = 00	250 = 1537 2	470 = FBE 3	690 = 1EA1 1	910 = 5189 4	1130 = 4F50 C
40 = BC2B B	260 = DADE D	480 = CC60 8	700 = 6FDC 1	920 = 9D6 C	1140 = 325A A
50 = AA05 9	270 = 5049 4	490 = D9D0 8	710 = 4625 6	930 = C138 3	1150 = D562 3
60 = D90A 3	280 = CAB4 A	500 = 146A 4	720 = 69D D	940 = A096 B	1160 = E007 1
70 = 5EDD 9	290 = EF20 9	510 = 84E0 C	730 = D4BF 2	950 = C8EA D	1170 = 5046 B
80 = BFBA E	300 = 7BB3 3	520 = 71B0 3	740 = 439 E	960 = 7CD2 F	1180 = 7EC9 A
90 = 11D1 D	310 = A43B 2	530 = E0ED B	750 = 9974 E	970 = 3EF8 F	1190 = 8763 6
100 = C765 5	320 = 6CBB 7	540 = 6B40 2	760 = BE26 B	980 = 898 0	1200 = 2638 5
110 = 77BE 9	330 = 8A39 9	550 = 1416 8	770 = 97F9 8	990 = ED0F 6	1210 = 4B2D 9
120 = AF79 6	340 = B7BD 2	560 = C389 0	780 = 2AA8 C	1000 = E053 7	1220 = 327A 2
130 = A90E F	350 = C8DF 0	570 = 69F5 8	790 = 402A 0	1010 = 421D 8	1230 = 2CBF 4
140 = DA43 4	360 = 4ED C	580 = 61C9 6	800 = 945D D	1020 = 62F6 9	1240 = AD59 6
150 = 5685 F	370 = D6F0 C	590 = B5C9 0	810 = E70C 9	1030 = 9502 F	1250 = 93A0 0
160 = 2FAA C	380 = 26E9 7	600 = E013 B	820 = A57 E	1040 = 7EB1 7	1260 = B6C9 7
170 = F65C B	390 = FC14 0	610 = 946A C	830 = FE8C 4	1050 = BA72 3	1270 = 2D2C B
180 = F52 A	400 = 78A3 9	620 = 1F1F D	840 = 63B9 B	1060 = ED0F 5	1280 = 55BB 3
190 = 6C34 8	410 = 9C6C A	630 = 800D C	850 = D4F6 8	1070 = 42FA 1	
200 = D486 B	420 = ABAD C	640 = B059 A	860 = C206 B	1080 = B58A 3	
210 = CDC7 8	430 = ECA1 A	650 = 466F 0	870 = B61A 9	1090 = DB84 7	
220 = 6B56 9	440 = D255 6	660 = ABA4 C	880 = D739 2	1100 = 6243 D	

The truth about TELEX

How much does it cost to go on Telex?

You could go the conventional way and buy a dedicated Telex machine. The cheapest will cost you £1,604 (the Whisper), the dearest £2,892 (the Cheetah). You will also need a separate telephone line, costing £101 to install, plus £404 a year rental. That's a total outlay over the first year of a minimum of £2,109. (All prices include VAT.)

Or you could do what more and more BBC Micro users are doing – use your BBC Micro to double as a Telex machine. And just use your ordinary telephone!

How do I turn my BBC Micro into a Telex machine?

All you need is a modem and appropriate communications software (see the advertisements in this issue), a telephone, and a subscription to *MicroLink*. Telex is just one of a growing number of services available to micro users on *MicroLink*. You can also read the news as it happens, go teleshopping, create your own closed user group, send telemessages and electronic mail right round the world, download free programs directly into your micro ... and much more.

But why use Telex?

Because it's a standard means of instant communication between businesses. Today there are 150,000 Telex machines in use in Britain – and more than 2 million worldwide. It's used to dramatically speed up business communications – it's just as quick as using the phone but far more efficient, because you have a hard copy of every "conversation" for your records.

But there's a big bonus you get when you use *MicroLink* for Telex that the conventional way doesn't offer.

With *MicroLink* you don't HAVE to be in your office to send or receive Telex messages. You can just as easily use your computer at home (or even a portable). So now you can check whether there are any Telex messages waiting for you – anywhere, anytime. How's that for your business efficiency?

How to join:
Phone 0625 878888

AMAZING OFFERS

£££ SAVING ELECTRON PACKS

**SCOOP PURCHASE
ELECTRON
COMPUTERS IN
STOCK NOW**
3 months warranty
£59.95
Includes power supply,
aerial lead, user guide.
90 day Warranty

**FOR THE ELECTRON
VIEW ROM** ~~£29.95~~
Word Processor **£14.95**
VIEW SHEET ROM ~~£29.95~~
(Spreadsheet) **£14.95**
BUY BOTH **£22.00**
ACORN PLUS 1 ~~£59.95~~
Limited stocks **£43.95**

PACKAGE 1
PLUS 1 **£49.95**
VIEW **£14.95**
VIEWSHEET **£14.95**
~~£79.85~~
OFFER PRICE £65.95

PACKAGE 2
ELECTRON COMPUTER **£59.95**
PLUS 1 **£49.95**
VIEW ROM **£14.95**
~~£124.85~~
OFFER PRICE £99.95

Lloydtron **NEW**
**DATA
RECORDERS**
Suitable for the
Electron
only £19.95

ELECTRON AND BBC

ELECTRON JOYSTICK
Electron Joystick Interface and Software
£14.95
Quickshot II Turbo Joystick **£13.95**
Buy both for **ONLY £25.00**

NEW ACORNSOFT OVERVIEW
A sophisticated combination of Viewspell &
Viewstore on Rom Cartridge and
Viewplot, View index and Printer Driver
Generator on Disc
BBC Disc & Rom R.R.P. £98.95
OFFER PRICE £78.45

**ACORNSOFT VIEW
PROFESSIONAL**
Combines the functions of a wordprocessor
spreadsheet and database in one program.
**BBC B, & all Master Series Micros
R.R.P. £99.95**
OFFER PRICE ONLY £79.45

PRIMARY EDUCATION
ASK SOFTWARE 7-11 years
The best four language programs (set)
The best four maths programs (set)
BBC Disc **£17.94 per set**
BBC Compact **£18.35 per set**
BBC/Electron Cassette **£17.95 per set**

EDUCATION SPECIALS

Unikword Spanish	£14.95	Maths 'O' Level II	£12.95
Unikword Italian	£14.95	Biology	£12.95
Talkback Workshop		English	£12.95

ANY TWO FOR £3.95

ELECTRON POWER SUPPLIES **£9.95**
LOGO (Electron) **£59.95 £29.95**

ARCHIMEDES !

Zarch	£10.95	£17.95
Minotaur	£14.95	£13.45
Ansi C	£110.85	£102.47
Fortran 77	£113.85	£102.47
ISO Pascal	£118.85	£102.47
Comal	£40.85	£44.95
Deltabase	£29.85	£28.95
Twin	£33.85	£30.00
Artisan	£39.85	£35.95
Toolkit Module	£39.85	£35.95

HOME INTEREST

Snapper	£6.99	*Desk Diary	£6.99
Boxer	£6.99	*Business Games	
*Watch your Weight	£6.99	*Graphs and Charts	£6.99
Theatre Quiz	£6.99	Complete Cocktail Maker	£6.95

SELECT ANY FIVE FOR ONLY £7.95
(or £1.65 each)

BBC PUBLICATIONS

Maths with a Story 1 or 2 (4-8 years)		
BBC/Electron Cass	£11.95	£9.55
BBC 40T	£12.95	£10.35
Picture Craft (6-14 years)		
BBC 40T	£10.95	£15.95
Deutsch Direkt!	A vous la France	
BBC 40T/Electron Cass	£22.95	£18.35

Send 18p stamp for full educational catalogue

**RECENT RELEASES
AT SPECIAL PRICES**

Superior Collection 1 or 2	BBC only	
Superior Collection 3	Electron only	
Codename Droid	Crazee Rider	
Strykers Run	Palace of Magic	
Spellbinder	Play It Again Sam	
Quest	Play It Again Sam II	
Bonecruncher	Elixir	
BBC/Electron Cass	£9.95	£7.59
BBC Disc	£11.95	£9.59
BBC Compact/Electron 3.5"	£14.95	£11.99
Life of Repton	BBC/Electron Cass	£5.49
	BBC Disc	£6.49
	BBC Compact	£8.49
IMOGEN	BBC Cass	£7.59
	BBC 40 or 80t	£8.59
	Master Compact	£10.95

REMEMBER - New titles are being released every week! Phone for bargain prices!!

VOLTMACE
Delta 3B Twin Joysticks
For use with Plus 1 or BBC
£10.95 £17.95

MICROPOWER AND OTHER GAMES

ELECTRON

Classic Adventures	£6.95	Croaker	£7.95
Gyroscope	£6.95	Bumble Bee	£7.95
Bandits at 3 O'clock	£6.95	Positron	£7.95
Escape from Moon Base Alpha	£7.95	Felix & the Fruit Monsters	£7.95
Ghouls	£7.95	Cybertron Mission	£7.95
Stock Car	£7.95	Moonrailer	£7.95
Killer Gorilla	£7.95	Felix & the Evil Weevils	£6.95
Rubble Trouble	£7.95	Frenzy	£6.95
Swoop	£7.95		

BBC

Gyroscope	£7.95	Stock Car	£7.95
Classic Adventures	£7.95	Cybertron Mission	£7.95
European Knowledge	£7.95	Positron	£7.95
World Geography	£7.95	Fat Man Sam	£9.95
Junior Maths	£7.95	Star Drifter	£9.95
Killer Gorilla	£7.95	Microcosm	£9.95
Bandits at 3 O'clock	£7.95		

ANY FIVE FOR ONLY £7.95!

MICROPOWER MAGIC COMPILATIONS I & II
**10 ORIGINAL HITS ON EACH
FANTASTIC VALUE**

BBC B/B + /MASTER CASSETTE	£7.95	£5.95
BBC B/B + /MASTER 80T DISC	£7.95	£5.95
BBC B/B + /MASTER 40T DISC	£7.95	£5.95
BBC COMPACT DISC	£9.95	£7.75
ELECTRON CASSETTE	£7.95	£5.75

**BRAND NEW
FERGUSON**
12" Green Screen Monitors (MM02)
ONLY £59.95!
(Carriage free if bought with Electron or Plus One -
otherwise please add £2.00)


MASTER COMPACT

★ VIEW 3	£59.80	£45.00
★ VIEWSHEET	£59.80	£45.00
VIEWSPELL	£39.95	£31.96
★ VIEWSTORE	£59.80	£45.00
★ VIEW INDEX	£14.95	£11.99
★ ALL ARCHIMEDES COMPATIBLE		

Name _____
Address _____

Tel. _____ MU5

*BBC COMPATIBLE



SAE for comprehensive price lists
Please state for which machine

SOFTWARE BARGAINS
(a division of the Micropower Group)
Dept. MU5, 8/8A Regent St., Chapel Allerton, Leeds LS7 4PE
Tel: (0532) 687735
Out of Hours Answer Phone

PLEASE ADD 95p P&P
and make cheques
payable to Software Bargains
Goods despatched within 48 Hours
Subject to availability

Library

Compiled by Steve Turnbull

HERE's another assortment of programming goodies. There's a pair of routines to convert a string to upper case and search the converted string for a second string. For those working with the partially-sighted there is a superb standalone routine to produce double height Mode 7 characters from normal printing.

We have yet another machine code print routine, a month planner for personal organisers and an aid for figuring out which Ascii value is needed to produce which teletext graphics character.

Title: Double Height
Language: 6502
Author: Rob Payne

There have been plenty of programs for printing characters in double height, but most involve a procedure output. This routine allows you to use normal print statements, but automatically puts the text double-height on a Mode 7 screen.

The code is assembled at &B00 and only occupies one page of memory. To run it CALL &B00 when the code is *LOADed or simply *RUN \$.double. To turn it off, CALL &B0B.

In both cases however, you must have the window set up as shown in PROC-window.

The routine works by intercepting the *oswrch* vector and then prints the character twice — one above the other — which produces a double height letter when combined with the double height letter teletext codes that are automatically inserted.

There are some problems that the routine does not overcome: Cursor

editing is not intercepted and when used on longer lines may cause the teletext chip to display the wrong half for each double height character. To prevent this the *FX4,1 command could be used.

Also, having a text window containing an odd number of rows or defining a new text window within an old one may cause the same effect. However in a properly written program these problems do not occur.

```

10 REM Double Height Text
20 REM by Rob Payne
30 byte=&FFF4
40 vec=?&20E+256*?&20F
50 FOR pass=0 TO 2 STEP 2
60 PX=&B00:[OPT pass
70 .dbl_on
80 LDA #dbl MOD 256:STA &20E
90 LDA #dbl DIV 256:STA &20F
100 RTS
110 .dbl_off
120 LDA #vec MOD 256:STA &20E
130 LDA #vec DIV 256:STA &20F
140 RTS
150 .dbl
160 STA acc:STX x_reg:STY y_reg
170 LDA vdu31:BNE move2
180 LDA #&DA:LDX #0:LDY #&FF
190 JSR byte:CPX #0:BNE norm
200 LDA acc:CMP #11:BEQ up_down
210 CMP #10:BEQ up_down
220 CMP #12:BEQ clear
230 CMP #31:BEQ move
240 CMP #30:BEQ home
250 CMP #32:BCC norm
260 CMP #127:BEQ delete
270 LDA acc:JSR vec
280 LDA #11:JSR vec
290 LDA #8:JSR vec
300 LDA acc:JSR vec
310 LDA #10:JSR vec
320 LDA #&86:JSR byte

```

```

330 CPX #0:BNE end
340 LDA #10:JSR vec:JMP end
350 .norm
360 LDA acc:JSR vec:JMP end
370 .up_down:LDA acc:JSR vec
380 JSR vec:JMP end
390 .move LDA #2
400 STA vdu31:JMP norm
410 .move2 DEC vdu31:BNE norm
420 LDA acc:CLC:ROL A:CLC:ADC#1
430 JSR vec:JMP end
440 .clear LDA #12:JSR vec
450 LDA #10:JSR vec:JMP end
460 .home LDA #30:JSR vec
470 LDA #10:JSR vec:JMP end
480 .delete LDA #&86:JSR byte
490 CPX #0:BNE del2:LDA #11
500 JSR vec:del2:LDA #127
510 JSR vec:LDA #9:JSR vec
520 LDA #11:JSR vec:LDA #127
530 JSR vec:LDA #10:JSR vec
540 .end LDA acc:LDX x_reg
550 LDY y_reg:RTS
560 .vdu31 BRK:.acc BRK
570 .x_reg BRK:.y_reg BRK
580 ]:NEXT:PROCwindow:CALL dbl_on
590 *SAVE $.double B00 BFF
600 PRINT"Turn on: CALL &B00"
610 PRINT"Turn off: CALL &B0B"
620 END
640 DEF PROCwindow:VDU26
650 FOR AX=0 TO 24

```

```

660 VDU31,0,AX,141:NEXT
670 VDU 28,1,23,39,0,12
680 ENDPROC

```



10 =	00	240 =	C47 F	470 =	D124 D
20 =	00	250 =	57F0 2	480 =	56CA 3
30 =	1A0D 0	260 =	41A3 3	490 =	BCB2 5
40 =	2763 6	270 =	CB93 0	500 =	6618 9
50 =	B43B 0	280 =	DD83 2	510 =	400B F
60 =	5E69 D	290 =	A047 F	520 =	2219 3
70 =	AAFB A	300 =	CB93 7	530 =	3956 9
80 =	CAC9 A	310 =	3690 8	540 =	A690 2
90 =	C68 0	320 =	1A1C 0	550 =	F7A2 6
100 =	9843 E	330 =	3C8B 0	560 =	B6EB E
110 =	6A69 C	340 =	D124 8	570 =	D150 6
120 =	C3C1 E	350 =	58FE 8	580 =	A086 E
130 =	560 0	360 =	124F 7	590 =	D062 9
140 =	9843 F	370 =	5F94 6	600 =	E762 E
150 =	12DD 4	380 =	15AD 3	610 =	AB3 1
160 =	F95E E	390 =	DEC8 A	620 =	FD2E 9
170 =	668F 5	400 =	FF12 D	640 =	CBE5 3
180 =	1FB9 D	410 =	B797 6	650 =	D295 C
190 =	8641 7	420 =	BA32 E	660 =	DE0D A
200 =	5A34 D	430 =	15AD B	670 =	5394 1
210 =	802B 3	440 =	3428 1	680 =	ED0F D
220 =	6C46 7	450 =	D124 B		
230 =	CE 9	460 =	85FD 6		

Title: Elegant Text Printer
Language: 6502
Author: Andrew Moulden

This routine could be considered third in the series evolving from Petra Galloway's two print routines (Library, March and July 1987). It is an improvement because the string can contain any characters and no data tables are required.

To include the routine just add lines 1000 to 1190 to the end of your programs and include:

```
OPT FNassemblep
```

at the end of your assembly code, and wherever you want to output some text just use:

```
OPT FNprint('Text')
```

This causes the following code to be assembled:

```
JSR print
EQUB 4 \length of text
EQU$ 'Text'
```

The print routine reads the number of characters in the text string and then prints them out, returning control to the main routine after the last string character.

The A, X and Y registers are pre-

served and all the labels within *print* are suffixed with the underline character to prevent any clashes with label names in the rest of the program.

If you have a string that is used more than once then place the call in a subroutine like this:

```
.not_imp
OPT FNprint('Not written yet')
RTS
```

This can be printed using a *JSR not-imp* whenever it is needed.

```
10 REM Elegant Text-Printer
20 REM by Andrew Moulden
30 DIM code 256
40 FOR LX=0 TO 2 STEP 2
50 PX=code:[OPT LX
60 .test
70 OPT FNprint("It works!" + CHR$
13)
80 RTS
90 OPT FNassemblep
100 ]:NEXT
110 CALL test:END
1000 DEF FNprint(a_$)
1010 [OPT LX:JSR print_:]
```

```
1020 ?PX=LEN(a_$):PX=PX+1
1030 SPX=a_$:PX=PX+LEN(a_$):=LX
1040 DEF FNassemblep
1050 ptr_=&F8:[OPT LX:.print_
1060 STA astore_:PLA:STA ptr_
1070 PLA:STA ptr_+1
1080 TXA:PHA:TYA:PHA
1090 LDY #1:LDA (ptr_),Y
1100 STA len_:INC len_
1110 .ploop_ INY
1120 LDA (ptr_),Y:JSR &FFE3
1130 CPY len_:BNE ploop_
1140 LDA ptr_:ADC len_:STA ptr_
1150 LDA ptr_+1:ADC #0:STA ptr_+1
```

```
1160 PLA:TAY:PLA:TAX:LDA astore_
1170 JMP (ptr_)
1180 .len_ BRK:.astore_ BRK
1190 ]:=LX
```

Get it right!

10 =	00	1000 =	222D	8	1110 =	6207	B	
20 =	00	1010 =	3BDC	1	1120 =	DFCD	4	
30 =	B3C2	2	1020 =	EAFE	D	1130 =	DF41	2
40 =	AAB9	A	1030 =	AAB6	0	1140 =	A5EA	6
50 =	7CBB	B	1040 =	4C15	7	1150 =	3516	D
60 =	5C1A	1	1050 =	C538	B	1160 =	49A6	5
70 =	3D57	B	1060 =	F892	6	1170 =	F249	3
80 =	9843	F	1070 =	72CE	1	1180 =	953E	0
90 =	2DF	B	1080 =	86E2	5	1190 =	CB98	5
100 =	DA42	F	1090 =	EF95	B			
110 =	6B7F	7	1100 =	BA28	7			

Title: Teletext characters
Language: Basic
Author: Teri Paul

When you're working on a Mode 7 screen it is fiddly trying to work out what characters produce which graphics patterns.

This simple program produces a blank template of the 3x2 graphics

block character and allows you to alter the arrangement to produce the character you want by pressing one of the six keys indicated. At the same time it prints the Ascii value of the display.


```
10 REM Teletext Characters
20 REM by Teri Paul
30 MODE4:VDU23;8202;0;0;0;
40 q=160:sx=2:sy=3:ix=200:iy=200
50 bs=160:bb=16:ox=200:oy=200
60 DIMa(sx,sy),k(sx,sy),n$(sx,sy)
70 FOR X=1 TO sx:FOR Y=1 TO sy
80 READ a(X,Y),n$(X,Y):NEXT:NEXT
90 FOR X=1 TO sx:FOR Y=1 TO sy
100 PROCbox(X,Y,k(X,Y)):NEXT:NEXT
110 REPEATREPEATGS=CHR$(GETAND&5F)
120 GX=INSTR("ZXASQW",GS):UNTILGX
130 y=(GX+1)DIV2:x=2-GXMOD2
140 k(x,y)=NOTk(x,y)
150 PROCbox(x,y,k(x,y))
160 z=a(x,y):IF NOTk(x,y) z=-z
170 q=q+z:PRINTTAB(0,0)q~q,SPC5;
180 IF q=255 VDU32 ELSE VDUq-128
190 UNTIL0
200 DEF PROCbox(X,Y,F%)
210 LOCAL x,y:x=(X-1)*ix+ox
220 y=(Y-1)*iy+oy:PROCb(x,y,bs,1)
230 PROCb(x+bb,y+bb,bs-2*bb,F%)
240 MOVE x+(bs-bb)/2,y+(bs+bb)/2
```

```
250 GCOL3,1:VDU5,ASCn$(X,Y),4
260 ENDPROC
270 DEF PROCb(x,y,z,C%)
280 GCOL 0,C%:MOVE x,y
290 DRAW x+z,y:PLOT 85,x,y+z
300 PLOT 85,x+z,y+z:ENDPROC
310 DATA 16,2,4,A,1,Q
320 DATA 64,X,8,S,2,W
```

Get it right!

10 =	00	120 =	1F49	D	230 =	F81E	8	
20 =	00	130 =	8E37	2	240 =	C36A	0	
30 =	BA2D	D	140 =	8DEA	4	250 =	20DC	E
40 =	99B6	2	150 =	451A	A	260 =	ED0F	8
50 =	CCCB	A	160 =	CFA7	2	270 =	BD1C	F
60 =	BB74	5	170 =	A68A	F	280 =	DDFD	7
70 =	3048	9	180 =	ED60	0	290 =	A3A7	1
80 =	5E68	A	190 =	53CE	6	300 =	2E7	E
90 =	3048	C	200 =	7907	7	310 =	1C9A	1
100 =	4FF2	F	210 =	AED4	0	320 =	5921	5
110 =	5B8B	1	220 =	8036	D			

Panasonic KXP1081



with BBC cable & paper
£165.00 (£143.48+VAT)
 above with Screen Dump & 2m cable
£171.00 (£148.70+VAT)

	Exc VAT	Inc VAT
KXP1080 Fabric ink ribbon	4.26	4.90
KXP1080 View Printer Driver	7.83	9.00
KXP1080 Control/Dump Rom	13.00	14.95

Panasonic KXP1082
 (as 1081 but 160cps)
 with BBC cable & paper
£199.00 (£173.04+VAT)

STAR LC10
 with BBC cable & paper
£199.00 (£173.04+VAT)

Canon PW1080A
 with BBC cable & paper
£239.00 (£207.83+VAT)

Kaga/Taxan KP810
 With BBC cable and paper
£239.00 (£207.83 +VAT)

JUKI 6100
 with BBC cable & paper
£299.00 (£260.00+VAT)

Kaga/Taxan KP815
 With BBC cable & paper
£269.00 (£233.91 + VAT)

CITIZEN 120D & LSP10
 with BBC cable & paper
£165.00 (£143.48+VAT)

EPSON LX 800
 With BBC cable & paper
£225.00 (£195.65 + VAT)

Z88 Micro
£267.00 (£232.17+VAT)

VOLTMACE JOYSTICKS

Delta 14B single	11.26	12.95
Delta 3B single	9.52	10.95
Delta 3B twin	15.61	17.95

PRINTER ADD ONS

	Ex VAT	Inc VAT
Universal Printer Stand	13.00	14.95
LX800 Sheet Feeder	62.61	72.00
LX/FX 800 Print Ribbon	3.00	3.45
NL-10 Sheet Feeder	47.83	55.00
NL-10 Print Ribbon	4.80	5.52
120D Sheet Feeder	86.09	99.00
120D Print Ribbon	4.00	4.60
KP/PW Print Ribbon	3.39	3.90
View Printer Driver	7.83	9.00
2way Printer Sharer	43.43	49.95
Juki 6100 Dust Cover	5.60	6.44
Printer Dust Covers other	4.00	4.60

PRINTERS/CABLES

	Ex VAT	Inc VAT
Epson LQ800	426.09	490.00
Epson FX800	313.04	360.00
Panasonic KXP3131 Daisy	233.91	269.00
Juki 2200 Daisy	207.83	239.00
Kaga/Taxan KP915	350.00	402.50
Amstrad LQ3500	286.09	329.00
MP 165	169.57	195.00
MP 420	294.78	339.00
1.5m (4 foot) BBC cable	5.70	6.60
2.0m (6 foot) BBC cable	7.74	8.90
Compact printer cable	7.74	8.90
IBM/Archimedes cable	7.74	8.90

EPROMS, 8271

	Ex VAT	Inc VAT
1-9 27128 250nS 21V	3.57	4.10
10+ 27128 250nS 21V	3.26	3.75
1-9 27128 250nS 12.5V	3.04	3.50
10+27128 250nS 12.5V	2.75	3.16
1-9 2764 250nS	2.60	2.99
10+2764 250nS	2.39	2.75
1-9 27256 250nS	4.22	4.85
10+27256 250nS	3.83	4.40
1-9 TTL/Cmos set	3.91	4.50
1-9 8271 controller	35.65	41.00
1-9 6264 LP 150nS	2.56	2.95
Acorn 8271 DFS	43.48	50.00

ROMS

	Ex VAT	Inc VAT
Inter-Word	37.39	43.00
Inter-Sheet	36.52	42.00
Inter-Base	48.70	56.00
Wordwise Plus	37.39	43.00
MEGA 3	71.30	82.00
Spell Master	40.87	47.00
ACP Disc Investigator	22.61	26.00
ACP Disc Toolkit	26.96	31.00
View 2.1	38.26	44.00
ViewStore	38.26	44.00
OverView I & II	68.70	79.00
View Professional	68.70	79.00

DISKETTES

	Ex VAT	Inc VAT
10 Banana Reversible	8.65	9.95
10 3.5" D/S 135tpi	9.57	11.00
10 48tpi D/S D/D in box	4.78	5.50
10 96tpi D/S D/D + case	7.39	8.50
10 96tpi D/S D/D in box	6.52	7.50
50 96tpi D/S D/D in boxes	21.70	24.95
100 96tpi D/S D/D in boxes	39.13	45.00
50 Disc Box hinged + lock	6.52	7.50
100 Disc Box hinged+ lock	7.83	9.00
Black Library case	1.21	1.39

5 1/4 DISC DRIVES

	ExVAT	InVAT
Cumana CSX100	91.30	105.00
Cumana CSX400	124.35	143.00
Cumana CD800S	260.00	299.00
MD100A 100k No PSU	84.35	97.00
MD100B 100k & PSU	99.13	114.00
MD400A 400k No PSU	88.70	102.00
MD400B 400k & PSU	103.48	119.00
MD802C 800k No PSU	173.91	200.00
MD802E 800k & PSU	191.30	220.00
MD802D 800k & stand	216.52	249.00

Phone for Viglen & Torch Winchester

MONITORS

	Ex VAT	Inc VAT
Philips CM8833	230.43	265.00
Philips CM8852	251.30	289.00
Philips BM7502 Green	68.70	79.00
Philips BM7522 Amber	73.91	85.00
Philips BM7542	73.91	85.00
Philips BM Tilt stand	7.78	8.95
Taxan KX P31 Green	73.91	85.00
Taxan KX P39 Green	82.61	95.00
Taxan KX Amber	82.61	95.00
Taxan Super Vision 625	313.04	360.00
Microvitec 1451	221.74	255.00
Microvitec 1451 AP	260.00	299.00
14" Tilt/Swivel Stand	13.87	15.95

(Prices inc. BBC Cable)

MASTER/COMPACT

	Ex VAT	Inc VAT
Master 128K Micro	365.22	420.00
Archimedes 305 from	699.00	803.35
512 Co-processor	185.00	212.75
Turbo Upgrade	98.78	113.50
Acorn Z80 2nd Pro	317.39	365.00
Acorn Cartridges	10.87	12.50
Peartree Cartridges from	8.65	9.95
Care Cartridges from	7.65	8.80
ARM Assembler Book	12.00	12.00
Understanding Interword	6.50	6.50
Reference Manuals	14.00	14.00
View 3/View Sheet Guides	9.00	9.00
Master & B Dust Covers	3.00	3.45
Monochrome Compact	360.87	415.00

Second user BBC B's available


Phone for our best price before placing your order
EDUCATIONAL & GOVERNMENT ORDERS WELCOME
 All products have a 12 month no quibble guarantee
 Prices subject to variation without prior notification
 We are closed some Saturday afternoons
 Carriage 92p (80p + VAT) Securicor £6.90 (£6.00 + VAT)

WeServe

Larger items
 delivered
 by Securicor



Micro Dept.
 128 West Street,
 Portchester,
 Hants.
 PO16 9XE
 Tel: 0705 325354

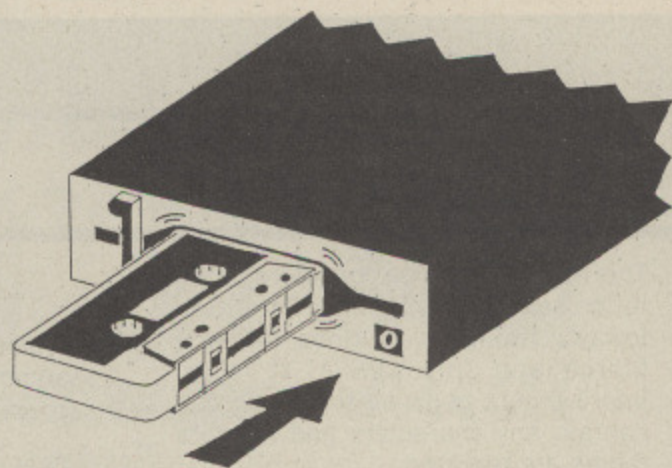

HAVING PROBLEMS ?

REPLAY

THE ULTIMATE IN TAPE TO DISK
 TRANSFER

Features include :

- * Very fast saving and loading of files
- * No soldering of track cutting required
- * Saves up to 22 files per disk
- * Fully menu driven
- * Money back guarantee if not satisfied

BBC B and B+ version £29.90
 BBC Master 128 version £35.00

Master 128 Products

ROMBOARD 3 - Adds 3 extra ROM sockets
 Works by replacing the computer's built-in
 ROM software with other ROMs (including
 the Inter-series from Computer Concepts).

ROMBOARD 4 - Adds 4 extra ROM sock-
 ets plus a Read/Write protect switch
 Supports up to 4 ROMs, by overlaying
 either RAM banks or cartridge slots.

ROMBOARD 3 costs £17.50
ROMBOARD 4 costs £26.50

- * All products fully documented
- * Full backup service available
- * All prices include VAT and postage

For further information contact :

Vine Micros Ltd
 Marshborough, Sandwich, Kent
 Tel : 0304 812276/368968

Library

Title: Fax Diary
Language: Basic
Author: Richard Gregg

A personal organiser is very useful but pricey. We can't do anything about the cost of the binder, but stationery is another matter. This program prints page planners for complete months in a suitable fax style, and if you have the proper continuous stationery it will look even

better — otherwise you'll have to cut the printed sheet to size.

When run, the program prompts you to enter first the year then which day of the week it starts on — press space to circle through the options and return to select.

You can then set up the printer

paper and the program will print the whole year.

There is a pause between each page to allow you to adjust page lengths and so on. Although the program could be made more automatic it works fine as it stands and it is very simple to use.

```
10 REM Fax Diary
20 REM by Richard Gregg
30 MODE7:DIM day$(42),month$(12),
nday(12)
40 INPUT"Enter year :";Y%
50 FOR M%=1 TO 42
60 IF (M%-1)MOD7=0 THEN RESTORE
70 READ day$(M%):NEXT
80 PRINT"What day does ";Y% sta
rt on?""(Space then Return)"
90 X%=POS+4:Y%=VPOS+1:D%=0
100 REPEAT D%=D%+1:IF D%=8 D%=1
110 PRINTTAB(X%,Y%)day$(D%);
120 REPEAT AX=GET
130 UNTIL AX=32 OR AX=13
140 UNTIL AX=13:FOR M%=1 TO 12
150 READ month$(M%),nday(M%):NEXT
160 IF Y%MOD4=0 nday(2)=29
170 PRINT"Ready printer!"
180 REPEAT UNTIL GET=32
```

```
190 VDU 2,1,27,1,15
200 VDU 1,27,1,71,1,27,1,45,1,1
210 FORMX=1TO12:LX=LENmonth$(M%)
220 PRINTSPC6month$(M%)SPC1;
230 PRINT;Y%SPC(42-LX)
240 E%=D%+nday(M%)-1:Q%=46
250 FOR V%=D% TO E%
260 IF V%-D%+1>9 Q%=45
270 PRINTday$(V%)SPC1;"SPC1;
280 PRINT;V%-D%+1SPCQ%:NEXT
290 D%=(nday(M%)+D%)MOD7
300 IF D%=0 D%=7
310 IF M%<12 VDU3,7:PRINT"Next pa
ge!":REPEATUNTILGET=32:VDU2
320 NEXT:VDU3:END
330 DATA Mon,Tue,Wed,Thu
340 DATA Fri,Sat,Sun
350 DATAJanuary,31,February,28
360 DATAMarch,31,April,30,May,31
370 DATAJune,30,July,31,August,31
```

```
380 DATASeptember,30,October,31
390 DATANovember,31,December,31
```



10 = 0 0	140 = B008 4	270 = 8913 7
20 = 0 0	150 = BED9 0	280 = 400A 1
30 = 1767 7	160 = 7532 7	290 = 2662 9
40 = 8A82 E	170 = F45D 9	300 = EFCC 6
50 = E845 7	180 = 2B9E 4	310 = 2241 6
60 = EE54 D	190 = 3D07 2	320 = 54BA E
70 = 6F3C 3	200 = AA6 8	330 = 1B70 2
80 = AB82 5	210 = 738A 8	340 = C494 6
90 = 7A43 6	220 = CD86 4	350 = 30D2 B
100 = A7BE 5	230 = 92A A	360 = 6D35 F
110 = 9FB9 7	240 = ADAF B	370 = 9DA8 7
120 = 3991 2	250 = F5A2 E	380 = 55D7 3
130 = 408 8	260 = E25C F	390 = EE71 C

Title: String Search
Language: Basic (any)
Author: Peter Cumberland

Apart from string sorts — see Alpha Sort in our March 1988 issue — a common requirement when handling strings is a search facility.

The two routines below, when combined, allow you to examine a list of strings searching for those which

contain a particular string within them.

The function *cap* is used to convert both the search string and the one being checked into upper case. And *FNinstr* performs the actual search — it is important to ensure that the

string being searched for is longer than the other to avoid the known bug in Basic I which otherwise causes a crash.

Both routines are quick, compact and easily incorporated into your own programs.

```
10 REM String Search
20 REM by Peter Cumberland
30 MODE7:DIM p%256
40 REPEAT CLS:RESTORE:count=0
50 PRINT"Enter search string";
60 REPEAT INPUTitm$:UNTILitm$=""
70 itm$=FNcap(itm$):PRINT
80 REPEAT READ wrd$:wrds$=FNcap(wr
ds$)
90 IF FNinstr(wrd$,itm$)>0 PRINT
wrds$:count=count+1
100 UNTIL wrd$=""
110 IF count=0 PRINT"Not present"
ELSE PRINT"Total = ";count
120 PRINT"Another? ";
130 REPEAT x$=CHR$(GETAND&DF)
140 UNTIL FNinstr("YyNn",x$)
```

```
150 PRINTx$:UNTIL x$="N":END
160 DEF FNcap($p%)
170 LOCAL AX,B%,L%,Z%
180 AX=ASC"a":Z%=ASC"z"
190 FOR L%=0 TO LEN$p%-1:B%=p%?L%
200 IF B%>=AX IF B%<=Z% p%?L%=BXAN
D&5F
210 NEXT:=$p%
220 DEF FNinstr(w$,i$):LOCAL P%
230 IFLENw$>=LENi$P%=INSTR(w$,i$)
240 =P%
250 DATA Put,your,characters,in,a
260 DATA List,here,(anything,will,
do)
270 DATA and,place,a,null,string
280 DATA at,the,end,of,it,"
```



10 = 0 0	110 = 64F0 3	210 = BCCC 6
20 = 0 0	120 = 1E0B 9	220 = E955 1
30 = 11FD D	130 = 8ED7 5	230 = 92F0 3
40 = 8644 B	140 = 9391 7	240 = FD8C 8
50 = FCD1 4	150 = A3BC 0	250 = F967 7
60 = 1BB3 A	160 = 6632 3	260 = CE4F B
70 = A95A 4	170 = 7FB9 C	270 = D359 B
80 = 8787 5	180 = 3C4E 4	280 = 9E2B 8
90 = B7D0 1	190 = 7943 1	
100 = ECFE 8	200 = B4AA E	

Harvey Coleman — can he cut the mustard for Acorn?

Harvey Coleman was recently appointed to the hot seat behind the managing director's desk at Acorn. The Micro User news editor Mike Cowley dropped in on him to establish why he's likely to make a significant contribution to the company.

THE trouble with most bosses of computer firms is that they are either boffins or marketing men, but rarely both. Sir Clive Sinclair, for one, couldn't go wrong when it came to making technological waves, but then almost drowned in the quicksand he created with the C5.

Amstrad's Alan Sugar is undoubtedly a super salesman. In fact, he might even have been able to flog the three-wheeler that ranks alongside the Ford Edsel as one of world's greatest man-made disasters. But he will never be remembered as an innovator. Just imagine how much more money he could have made if he knew the difference between rom and ram?

Harvey Coleman, Acorn's new managing director, however, is one technocrat who appears to be in tune with the end user. And that's why he was picked by Olivetti to achieve the as yet to be

realised true potential of Acorn.

"Some people have taken the view that maybe I came along to do what Olivetti would 'require' of me", he said, "but that isn't the situation. I have no opportunity to go back and blame somebody for giving me the wrong set of directions. Those are decisions we'll have to take here and be accountable for".

His mission, as defined by his bosses in Italy, is twofold: To develop machines that are not only successful in the home market but also then can be sold back to Olivetti whose marketing muscle will help establish a global presence.

"Olivetti's position is like that of the British Government in that it is not going to nurse lame ducks", says the latest Mr. Acorn. "It looks forward to having a strong company which can sell because of the quality of the product".

To understand what makes Harvey Coleman tick, it is necessary to examine his career to date. For it is the sum total of his experience which will influence the course he will now chart for Acorn. Born in Hampstead, London, he attended Kilburn Grammar School before going on to take a degree in physics at St. Peter's College, Oxford.


As a brilliant mathematician, he opted for physics after being told there was no future in the numbers game unless he wanted to teach. Once he'd graduated, he went into industry and initially ended up developing non-round moulded plastic containers.

His first brush with computers came in 1964 when he found himself working with drum-based machines. For Harvey Coleman this proved to be a milestone in his career.

He found programming fascinating, and eventually moved to a software house, working on early online systems.

One project saw him design a system to compute British Rail timetables. To achieve this, he created a working model of the thinking processes of the timetabler. "It actually looked at such considerations as to how long it takes a 60-year-old to cross from platform one to platform six at Crewe in order to make a connection", he recalls. Because of his online expertise, he was eventually sought out to design a system for commercial data processing — the first of its kind in the world.

Harvey Coleman:
Acorn's new
managing director

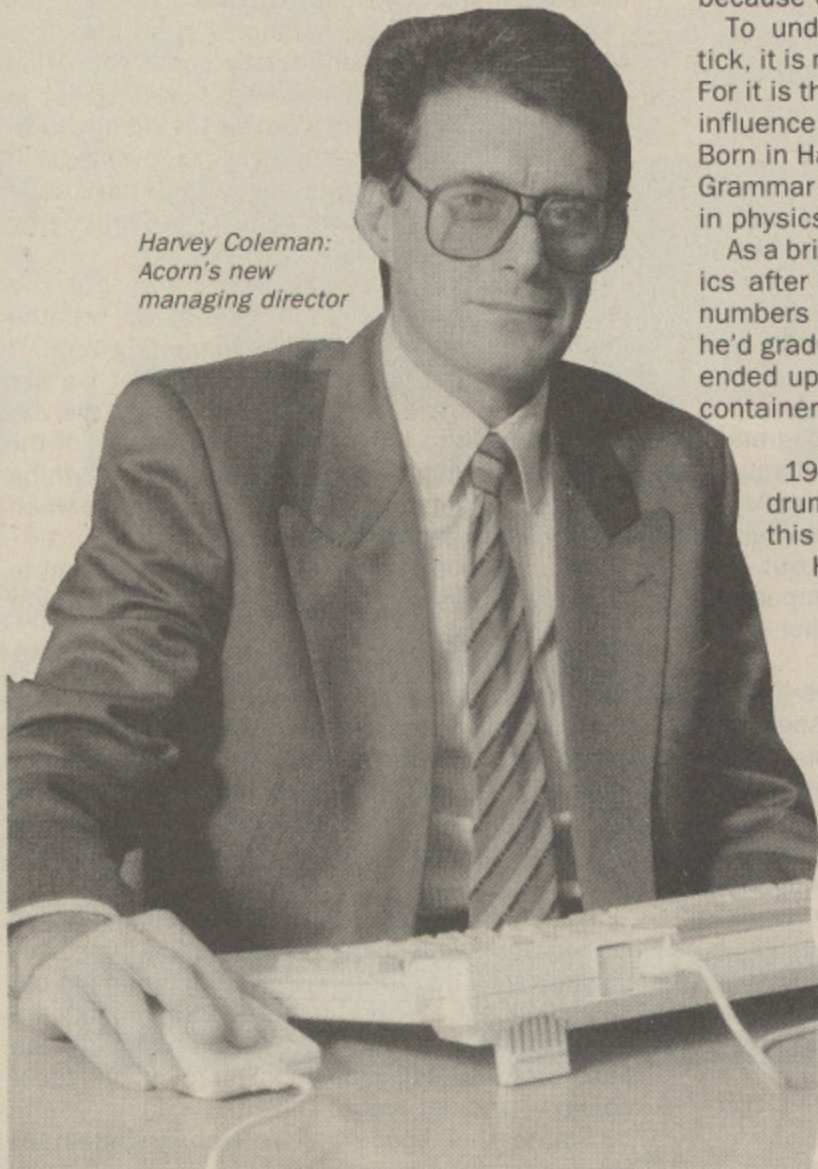

Here's one technocrat who appears to be in tune with the end user

Turn to Page 78 ►

◀ From Page 77

It called for intelligent terminals which had to be developed, because at that time they didn't exist.

"We actually started to sell that system, but unfortunately the company failed", says Harvey Coleman. "And it failed because it got its marketing wrong. I vowed at that time that I would never again be involved with excellent technology which did not have strong marketing behind it".

To make certain he would have some control over this, he switched careers in mid-stream, moving from the backroom to the sharp end in sales. In the late 70s he was hired by British Olivetti as marketing manager, subsequently becoming sales manager. Working primarily in the finance sector, he sold the first system to the Abbey National Building Society and then Barclays Bank.

"I think it gives a view of my feeling about the end user in that I encouraged the people at Barclays not only to take on a piece of hardware but also to actually involve designers from Olivetti in the shape of the furniture on which the equipment was to sit", he remembers. "They were very happy with the fact that someone had taken the trouble to worry about the user".

Olivetti, recognising Coleman as a high flyer, soon installed him at headquarters to head up two groups, one dealing with support to world-wide activities in the banking world, the other to take some responsibility for office information. It was in these dual roles that he gained considerable knowledge of world markets, further enhancing his reputation within the close knit Olivetti fraternity.

IN his last days at Olivetti he found himself in charge of vertical market strategy, with a series of "watchers" world-wide reporting back to him. "With Acorn having Olivetti as its major shareholder one of the benefits will be the ability to pick up the phone and get this vital market information", he says.

Harvey Coleman admits to having taken a long hard look at the Acorn situation before agreeing to becoming managing director.

What then did he find wrong at the company? "Too broad a base of enthusiasm", he insists. "Tremendous enthusiasm in fact, but not focussed enough and focus is very important. However, I didn't find anything I consider to be drastic."

Does his arrival mean there will be further major staff upheavals as were witnessed last year? "I would hope not", he says. "I have been given an opportunity to work from a base from which we can expand."

"That doesn't mean to say there won't be a few odd people who have to go, but you will see there is already recruitment going on to fill in gaps to ensure all areas are correctly staffed."

"But everything we do from now will have to be profitable. We won't be undertaking projects just because two or three people think it's a good idea."

"I cannot afford to run elements of this company at a loss".

Harvey Coleman believes that his trump card at

Acorn is that it has achieved the jump from 8 bit technology to 32 bit in the form of the Archimedes. "The fact of the matter is that what this has given me as a marketeer, not just as MD, is technology which has some longevity", he points out. "We know that we are not getting to market with products that are already out of date. That is a very important advantage to us – and one we must capitalise on".

FROM his first day in the job the new Acorn boss has made no secret of the fact that he intends to consolidate the company's educational base before striking out in new directions. Firstly into small business, then into carefully targeted vertical markets.

"I want the educationalists to understand our total commitment to them, however", he says, "and the very fact that we intend to broaden our base should give them a degree of confidence in the future."

"That confidence is already being reflected by the news that South Tyneside is going to take the Archimedes as its basic machine because it believes we can deliver the applications. And don't forget – and it's most important – we are not dropping the Master series."

"That's a highly competitive product in its own right in that it offers not only an immense library of applications but also reliability."

"Utilisation of these machines is so high that when they are held centrally by some education authorities, there is a two weeks waiting list to use them. In fact, Acorn's product reliability is so good that it can be seen as a disadvantage in some ways. To appreciate this, all you have to do is look at all the BBC Micros that are still being used every day out there".

Though convinced that Acorn has got the products, Harvey Coleman intends to breathe fresh life into the company's marketing arm. "I hope we are going to be better in that we are going to be more complete", he says. "We are going to have to think through the totality of the offer to our customers, in terms of everything from the point in time when we announce to when they actually get to use it as customers."

"My objective in marketing has always been to have happy customers, happy in what they've got in terms of value for money and ease of use."

"We happen to have something that has the potential to meet those requirements. We have the most advanced technology of its time at our fingertips. However, it's no use being first in the market with something unless we know what to do with it. And it will take a little while. I'm not going to guarantee that we'll do everything right first time".

It seems, however, that Harvey Coleman has immediately done something right first time. Any day now he'll be reporting a major sale to his old pals at Olivetti. "I hope to be able to announce a significant first order shortly. And I foresee the opportunity to sell more and more of our technology – and not just to Olivetti."

"Watch this space", says Harvey Coleman, technocrat and marketeer.

“We have the most advanced technology of its time at our fingertips”

CONQUEROR



In the Heat of the Battle



Selecting a Battalion



A Mighty German King Tiger Tank



Planning your Offensive

CONQUEROR—The Software Revolution Rolls On

Step into the tank of your choice and experience the thrill of controlling one of the most powerful land vehicles in the world.

Masterfully designed and written by Jonathan Griffiths, with graphics routines by David Braben, this astounding game will fascinate you as your skills of driving, firing and strategical thinking develop and improve.

Conqueror takes place in a 3-dimensional world of roads, hills, villages, rivers and woodland—which only the Archimedes computer can portray with such reality. Set against this environment is a range of tanks: each authentically reproduced taking into account its speed, armour and firing capabilities.


Three distinct types of game are supplied in Conqueror, to cater for everyone from the novice to the expert:—

Game type 1 (Arcade) is a simple arcade-style game enabling you to develop your control of driving and firing.

Game type 2 (Attrition) puts you in command of a small group of tanks. You must initiate yourself with the principles of battle strategy in addition to controlling the actions of an individual tank.

Game type 3 (Strategy) is a full battle simulation with up to 16 tanks per side from American, German or Russian forces. You can call upon indirect fire to knock out the enemy, and use spotter planes to locate the opposing forces as they attempt to take the strategic objectives.

This game is well-documented with extensive information provided on all of the 12 types of tank involved. Now's the time to see if you can become...The Conqueror.

For the  Archimedes computer: £24.95 (on 3 1/2" disc)

SUPERIOR SOFTWARE
Limited

Dept. CQ2, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453

ACORNSOFT

Please make all cheques payable to "Superior Software Ltd".



24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately. (This does not affect your statutory rights).

COLOURJET 132

HIGH PERFORMANCE COLOUR INK JET PRINTER

(compatible with IBM pc, BBC micro, Nimbus etc.)

- ★ PRINTS ALL 64 SCREEN COLOURS FROM CGA AND EGA *
- ★ EMULATES OTHER PRINTERS (A1210, PJ1080A and QUADJET)
- ★ OVERHEAD TRANSPARENCY PRINTING
- ★ 80 + 132 COLUMN OPERATION, A4 WIDTH
- ★ UP TO 1280 DOTS/LINE ADDRESSABLE
- ★ FULL VIDEOTEX CAPABILITY
- ★ OPTIONAL BUFFERED RS232 (INTERNAL)
- ★ HIGHLY VERSATILE

ULTRA
LOW
NOISE

LIST PRICE
£569 + VAT

* using optional Integrex software.



EDUCATIONAL DISCOUNTS AVAILABLE

INTEGREX LTD CHURCH GRESLEY, BURTON ON TRENT,
STAFFS DE11 9PT
Tel (0283) 215432
Telex 341727 INTEGX



Viewing in style

John Allen shows how to create Basic effects with the Z88 VDU codes

THE Z88 uses BBC Basic so it doesn't take long to become familiar with the language in new surroundings. But what can be done on the portable computer that can't be done on the BBC Micro? The Z88 manual gives few hints, and I am now going to look at two types of facilities provided by the Z88 VDU drivers: Windows and what are called hardware attributes – effects that can be applied to the display, like bold lettering.

The short demonstration program below – which will only run on the Z88 – illustrates some of these facilities. Many of the Z88's VDU codes toggle effects – the same code turns them on and off and you can see this by typing any effect's name twice. Also most of them are cumulative, so BOLD followed by FLASH will produce bold flashing text.

So how does it work? Codes are sent to the VDU drivers either using the VDU command – where the parameters are one byte integers – or PRINT – where the parameters are Ascii characters. The demonstration illustrates both methods. All the codes explained here are VDU1 codes – they start with a 1 being sent to the drivers to signify that an effect is wanted.

Let's look at the demonstration program – line 60 is a good starting point. It sets up the left-

Turn to Page 82 ►

USEFUL WINDOW CODES

Here are the most useful codes if you are using windows. The parameters must be entered as Ascii codes unless they are bracketed: (1) should be sent as VDU1 or PRINT CHR\$(1) while C would be sent as VDUASC("C") or PRINT "C".

To set up a window use:

```
(1),7,#,window number,(32+topx),(32+
topy),(32+width),(32+depth),(type)
```

The type can be one of the values:

```
128 no lines
129 vertical bars
130 shelf brackets at top for a banner
131 bars and brackets
```

Once a window is defined you can use the following:

Select	(1),2,H,window number
Select and clear	(1),2,C,window number
Select and clear if first selection	(1),2,I,window number
Position cursor at (x,y)	(1),3,@,(32+x),(32+y)
Position cursor at column x	(1),2,X,(32+x)
Position cursor at row y	(1),2,Y,(32+y)
Grey window	(1),2,G,+
Ungrey window:	(1),2,G,-

```
10 REM Z88 VDU Drivers Demonstration
20 REM by John Allen
30 REM (C) The Micro User
40 CLS
50 A$=CHR$(1)
60 VDU1,ASC("7"),ASC("#"),ASC("1"),32
,32,64,40,129
70 VDU1,ASC("7"),ASC("#"),ASC("2"),74
,34,54,38,131
80 PROCtext("NO")
90 PRINT A$;"2C1";"Please enter choic
e of effect.";"Options are: BOLD, FLASH,
""GREYTEXT, INVERSE, TINY, ""UNDERLINE,
GREY and UNGREY."
100 INPUT "Choice: " action$

110 IF action$ = "GREY" PRINT A$;"2H
2";A$;"2G+";A$;"2H1";:GOTO 90
120 IF action$ = "UNGREY" PRINT A$;"2H
2";A$;"2G-";A$;"2H1";:GOTO 90
130 IF action$ = "END" PRINT A$;"2C8";
A$;"C";A$;"S":END
140 PROCtext(action$)
150 GOTO 90
160 REM
170 DEFPROCtext(a$)
180 PRINT A$;"2I2";
190 IF a$ = "NO" PRINT A$;"R";SPC(4);"
EFFECT WINDOW";SPC(5);A$;"R";
200 VDU1,ASC("3"),ASC("@"),32,33
210 IF a$ = "BOLD" VDU1,ASC("B")

220 IF a$ = "FLASH" VDU1,ASC("F")
230 IF a$ = "GREYTEXT" VDU1,ASC("G")
240 IF a$ = "INVERSE" VDU1,ASC("R")
250 IF a$ = "TINY" VDU1,ASC("T")
260 IF a$ = "UNDERLINE" VDU1,ASC("U")
270 PRINT"This is demonstration""tex
t in the effect""window.";A$;"2C1";
280 ENDPROC
```

This listing is included in this month's tape & disc offer. See order form on Page 159.

◀ From Page 81

hand window using the following parameters: 1 signifies an effect, 7 is the number of parameters (sent in Ascii), and # (in Ascii) is the code to set up a window with 1 as its number.

The remaining numbers give the placing and size of the window in the form top-left corner x coordinate, top-left corner y coordinate, width and depth – in practice 32 has to be added to each parameter. The display is 94 characters by 8

HARDWARE ATTRIBUTES

All the following can be toggled on and off:

Bold text	(1),B
Cursor	(1),C
Flashing text	(1),F
Grey text	(1),G
Upper case lock	(1),L
Reverse text	(1),R
Vertical scrolling	(1),S
Tiny text	(1),T
Underlined text	(1),U
Horizontal scrolling	(1),W

When vertical scrolling is enabled text will roll off the top of the display as new text is written at the bottom. Setting horizontal scrolling on will stop lines wrapping round on the next line.

and the origin is at the top left, so this window starts at 0,0 (32,32) and has a width of 32 (64-32) and a depth of 8 (40-32). The final parameter specifies the type of border for the window.

The Z88 has five windows available to programmers and the right hand window, numbered 2, is set up by line 70. Windows 6,7 and 8 are used by the system with 8 being the default Basic window. It's a good idea to return to this window – as shown in line 130 – when you exit a program. The default when you open a window is cursor off, so this line also switches it back on to leave the Z88 with the usual Basic screen defaults.

Line 90 uses PRINT to tell the Z88 that output should be to window 1. In turn the parameters are A\$ – the equivalent to VDU1 – 2 is the number of parameters to follow, C selects a window and 1 gives the window number. Windows can also be selected using H or I, as can be seen in line 180.

Line 200 moves the cursor to position 0,1 in the currently selected window – in this case 2. Again 32 has to be added to all coordinates.

The demonstration hardware effects are selected by lines 210 to 260. These only apply to any text output after they have been selected and not to the whole window. But it is possible to make a whole window grey, even when it already has text in it. This is shown in line 110 and reversed in line 120.

So there you have it. A demonstration routine showing some of the effects you can incorporate in your own programs on the Z88.



COMPUTER HOUSE

COMPUTER CONSULTANTS COMPUTER SYSTEMS SUPPLIES & TRAINING

EDUCATIONAL & PERIPHERAL SPECIALIST

Try our professional & friendly service for all your computing requirements!

- ★ Software & Peripherals
- ★ Computer Systems
- ★ Networked Systems
- ★ Supplies
- ★ Repair Service
- ★ Installation
- ★ Maintenance Contracts

(Sample prices ex VAT:)

Archimedes 310M Colour	969.00
Master Compact Professional	
Colour System with daisywheel Printer	769.00
Master 128	369.00
Colour Monitors	from 220.00
Disk Drives Single + PSU	from 115.00

Export, Educational & Official purchase orders welcome.
Open Monday-Saturday 9am-6pm. Telephone Orders Welcome.
All prices are subject to VAT and availability, and subject to change without notice

46 Christchurch Road,
Oxton, Wirral L43 5SF
Tel: 051 652 9196/7

Telex: 265871 MONREF G Quote Ref:72 MAG50053

How to get your BBC Micro to talk to an Amstrad

(or a Spectrum or a Commodore or an Atari or an IBM . . . or ANY other computer).

Language problems become a thing of the past when you join MicroLink. Now you can use your BBC Micro (plus your telephone) to send messages to any other computer user, with no restriction on make of machine – or even on distance.

microLink *electronic mail and much, much more!*

Details from 0625 878888



Portable fantasy

Pam Turnbull gives the Z88's first text adventure a trial run

Product: Withered Toad
 Price: £24.95
 Supplier: Wordmongers, 21 Edison Road, Rabans Lane, Aylesbury, Buckinghamshire HP19 3TE.
 Tel: 0296 437878

SUPPOSE that it was only a matter of time until someone introduced games to the Z88. Indeed in some ways it's the ideal medium – portable, battery-powered and compact. Unfortunately, the screen does limit the type of game but is ideally suited to text adventures. Now the addict can play whenever he or she wants and flip to the game from any of the Z88's other facilities.

Full marks then must go to Wordmongers for Withered Toad. This text adventure is expensive – but the main cost is that of the eprom, with the game itself adding only £5 on top. In time the price of the hardware will probably come down.

A daunting licence agreement comes with the package, as with all Wordmongers' products, to remind you of copyright restrictions – but it's rather unusual for games.

Setting up is easy – just a matter of plugging the eprom into your Z88 and from then it appears as an option on the Index and is as simple to load as Pipedream. Do take note of the fitting instructions on the inlay – don't remove a ram cartridge to insert the game.

Where I was most disappointed was in the quality of the parser. Over the last few years we have seen an increase in the quality of adventure parsers thanks to Quill and other adventure creators. Unfortunately, for this game any avid adventurer must return to the days of precise statement – no more TAKE ALL commands. As far as directions are concerned you are limited to the four major compass points, anything more complicated is met by incomprehension.

The knack is to use succinct, simple commands, limited to two words. Abbreviations are allowed, but the vocabulary is limited and more than ever you need to be on the same wavelength as the authors.

Now to the game itself. You and the withered toad must find your way home via the tube sta-

tion. You start alone in your room with a locked door and a key. Mysteriously – and via a 007-type lift – you find yourself in a basement apartment reminiscent of poorer student days – full of discarded food and green slime!

The withered toad himself pops in and out of the adventure signalled by a bleep from your micro and the description of the little creature hopping on and off your head. But there is no simple way of following the toad through the passages.

The Withered Toad is not a large adventure – it has about 40 locations. I enjoyed playing it though, and I am sure the teeth marks and footsteps must belong to someone but I haven't found out who yet and I am not sure I want to – especially as each time I wanted to hit something with my sword I was told that this was a nice game and I couldn't do that.

A couple of friends who played the game were disappointed by the size – but they play more adventures than me and this game is not aimed at them. Not having much time to spare I appreciate the ability it gave me to pop out of the game into Pipedream whenever I needed, knowing that I could rush back to avert doom a little later. I especially like not having to save and load first – you can save your position to be on the safe side, though.

Wordmongers was not attempting to write a definitive Colossal Cave type of adventure but an enjoyable and entertaining game. Once you have succeeded you are invited to send in your comments so that these ideas can be incorporated into the next one.

Wordmongers has already supplied a Defender type game on one eprom and seems to be ready to introduce more than just comms packages to the Z88 – indeed it has plans for a database manager, a filofax-type facility and a machine code assembler.

No one is trying to say that the Z88 is a portable games machine, and it would be to trivialise many of its uses and facilities to do that. Yet Withered Toad does open up another use and offers light relief, which is always welcome. It is wittily written and, despite the cost, I look forward to seeing Wordmongers' next offering.

Points for:

- Ideal introduction to adventures
- Always ready to play


...against:

- Poor parser
- No challenge for experts

The bottom line...

Great for a game on the train

Take part in our nationwide search for innovation in action

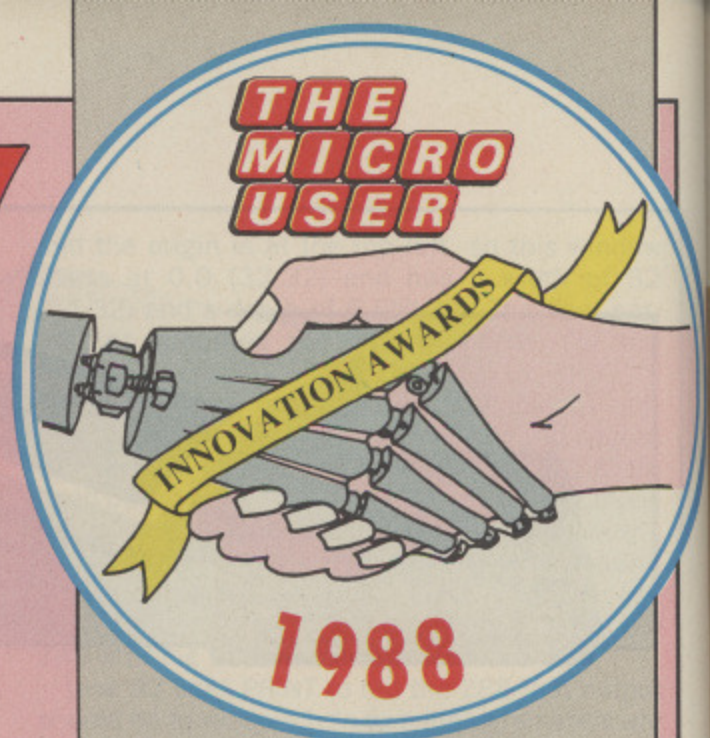

Last year's Innovation Award was an outstanding success with more than 500 users of the BBC Micro competing for the prestigious accolade.

Entries came from all over the world, from health researchers, engineers, teachers and students – all with remarkable applications which pushed the BBC Micro to its limits and beyond. The press response was enormous with top coverage in hundreds of newspapers throughout the country.

Now you can join our search for the innovations of 1988. And this year the competition is twice the size, with a special section for Archimedes users.

HOW TO ENTER

Tell us what your BBC Micro or Acorn Archimedes is doing that is out of the ordinary. It may be a project with exciting commercial potential, with significant social benefit – or even just for fun. Whether you're an individual, group, school or business, this contest is open to you – there's no restriction.

Your typed entry should not exceed 500 words, and you can also include any supporting illustrative material such as black and white photographs, colour transparencies, diagrams or screen dumps.

Complete the coupon below, attach it to your entry and send it to arrive no later than October 14, 1988.

The two winners will be announced at the Electron & BBC Micro User Show at the New Horticultural Hall, Westminster, from November 11 to 13.

THE PRIZES

The winner in the BBC Micro category will receive a magnificent Archimedes, courtesy of Acorn. This 32-bit workhorse is the fastest micro in the world with 512k ram, 512k rom, 800k 3.5in disc drive, mouse and colour monitor. It comes with a Welcome disc containing an excellent painting package, a music editor and much more. Value: £1,034.

In the Archimedes category the prize will be a powerful Brother 1709 printer, supplied by Kelator, Acorn's distributor to the trade. The 1709 can output text in three different modes – draft, near letter quality and letter quality – at speeds of up to 240 cps. The package will also come with unique software to make the most of the Archimedes' special features. Value: £685.

And both winners will receive an impressive plaque in recognition of their achievements.



ENTRY COUPON

Name _____

Address _____

Postcode _____

Daytime tel. no. _____

Occupation _____

Send to: *The Micro User Innovation Awards 1988*,
Europa House, Adlington Park, Adlington,
Macclesfield SK10 4NP.

"£229 for all that?"

"What's this - a new printer?"

"Yes, it's the very latest, the industry compatible Multi-font LC-10 from Star, there are features included as standard not found on printers sometimes twice the price..."


"Oh really - like what?"

"Well, there's the Star front control panel - so you don't have to fiddle with DIP switches - a built-in push tractor for low form tear-off. And you don't even have to take the tractor paper out to autoload single sheets with the LC-10's paper parking. There's a large 4K buffer - it's even got six NLQ fonts as standard. It prints at a realistic 120 cps and has a really fast NLQ at 30 cps".

"Hey, that sounds good, but what about quality? You'd have to go a long way to beat the print quality on that NL-10 you've got".

"True, but they've even improved on that and you can change all the resident fonts at the touch of a button".

"Hmm, that's really easy - £229 for all that? I wonder if my dealer will have any left..."

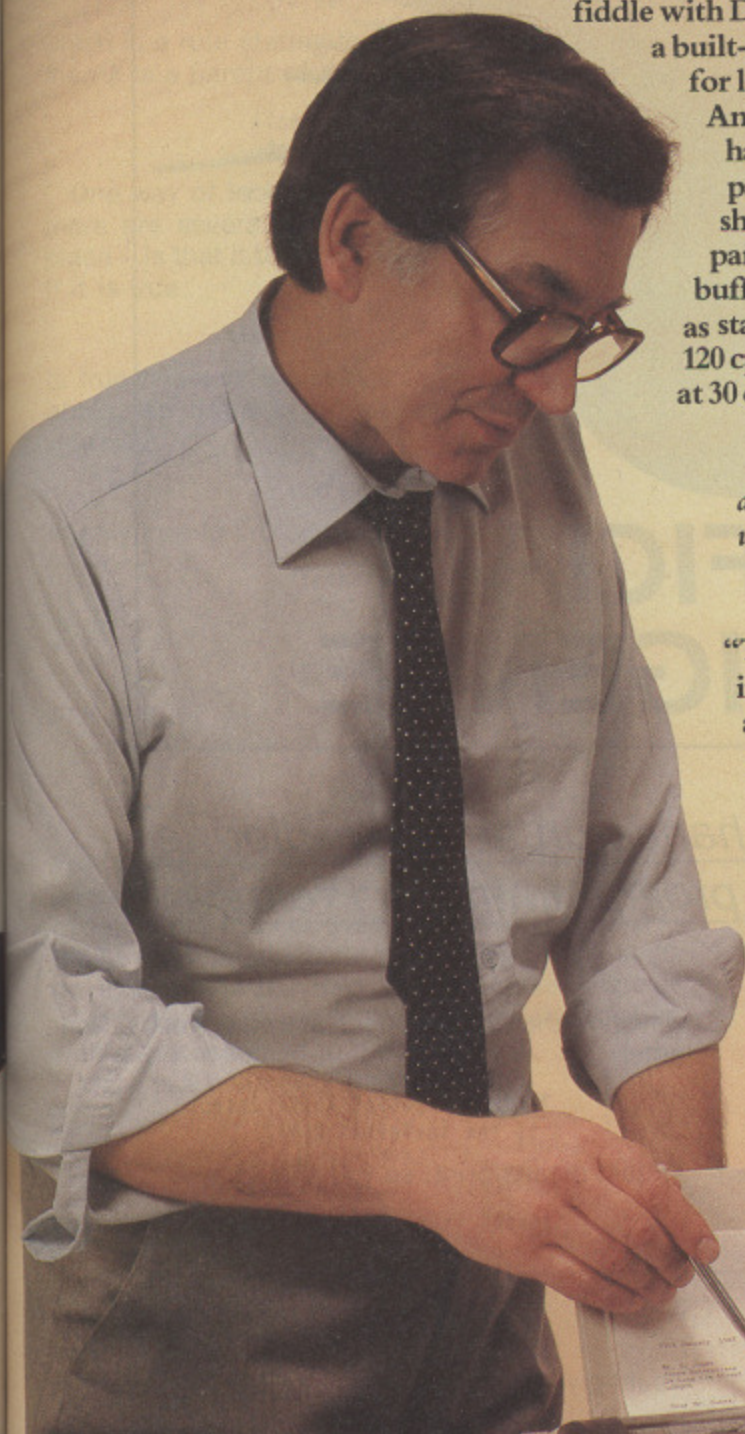

THE
star
PRINTERS FOR BUSINESS

Star Micronics U.K. Ltd.,
Craven House, 40 Uxbridge Road,
Ealing, London W5 2BS.
Telephone: 01-840 1800.

A division of
Star Micronics Co., Ltd., Japan.

Price excl VAT.

I'd like to find out if my dealer has any left. Please send me an LC-10 brochure
Please send me details of the Star range of dot matrix printers Or just call Belinda
on 01-840 1829.



Name _____ Company _____


Address _____

Postcode _____

Telephone _____

LC MU5

B B+ m  

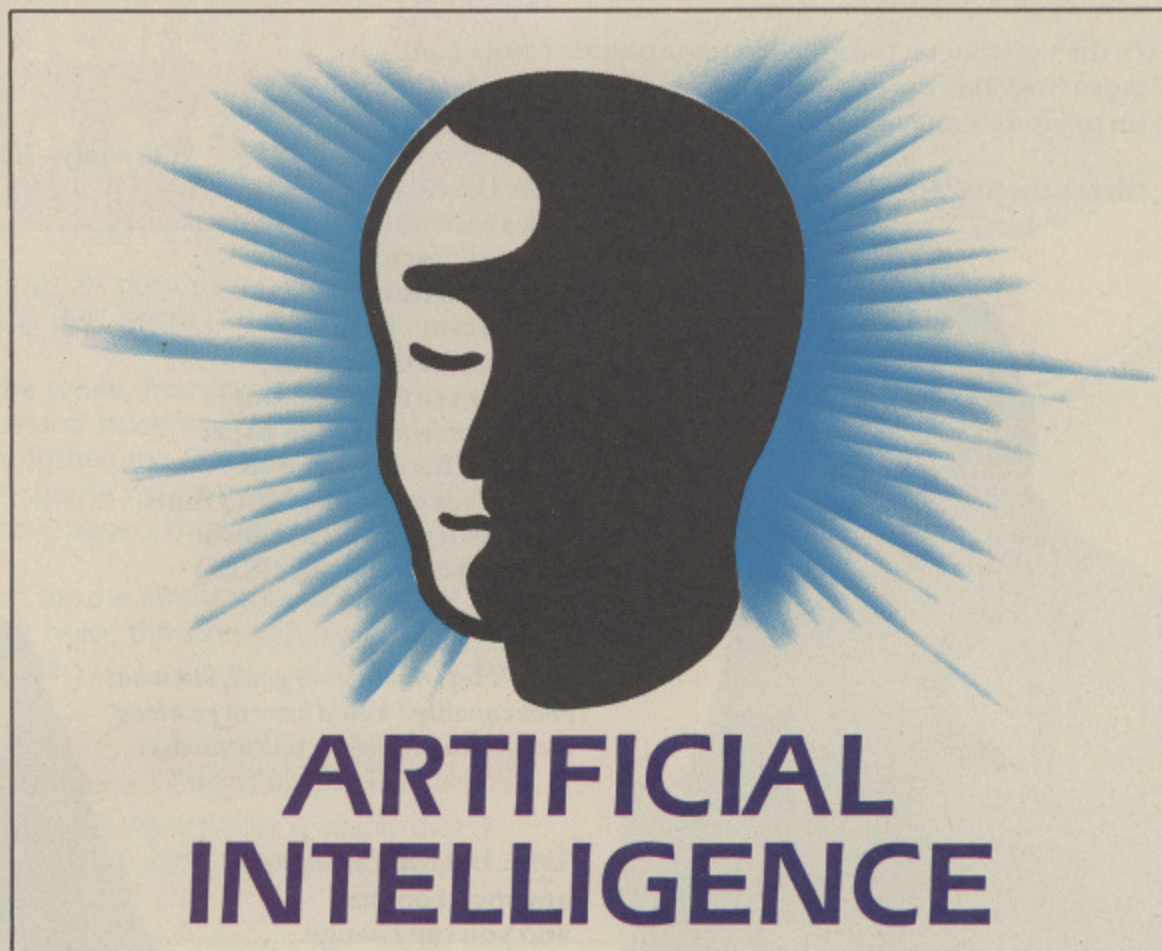

John Ashurst begins a hands-on series exploring the ramifications of programming in Prolog

THE best reason to try Prolog programming is because it's fun and easy. It is foremost among the languages used by researchers in artificial intelligence — expert systems, translation machines, intelligent data bases and smart robots all become possible with Prolog.

It works in a way quite unlike conventional languages: It is declarative rather than procedural — that's right, you get to learn a lot of new jargon too. What this means is that instead of seeing a program as a set of instructions, you see it as items of data which can be used to find an answer to a problem.

An excellent version of the language is available for the BBC Micro, but for some extraordinary reason it comes without an elementary text to allow the beginner to make a start. That's where these articles come in.

First, initialise Prolog — following the instructions for your version — and when you have the microProlog prompt, the ampersand, type in the following:

```
((father joseph jesus))
```

This asserts to Prolog that *joseph* is the father of *jesus*. The first word — *father* — is known as the relation name. Typing:

```
LIST father
```

or

```
LIST ALL
```

will show that this has been stored correctly. Now enter:

```
?((father joseph X)(PP Joseph is the father of X))
```

PP just means print, so you should see:

```
Joseph is the father of jesus
```

while:

```
?((father X jesus)(PP Jesus is the child of X))
```

would give:

```
Jesus is the child of joseph
```

So you can see that any of the terms of our single piece of information can be retrieved quite easily.

Now let's try something a little more subtle:

```
((parent X Y)(father X Y))
?((parent joseph jesus)(PP Yes))
```

will output:

```
Yes
```

while:

```
?((parent joseph fred)(PP Yes))
```

Will output a ? which may be considered as a *don't know* response.

The interesting thing about this is that the micro apparently knows that *joseph* is the *parent*



of *jesus* even though we have never explicitly said so. All that Prolog knows is:

```
((father joseph jesus))
```

which is a fact, and:

```
((parent X Y)
 (father X Y))
```

which is a rule stating that if *X* is the *father* of *Y* then *X* is a *parent* of *Y*. A similar rule would be:

```
((parent X Y)
 (mother X Y))
```

One way of looking at the way Prolog works — there are several ways, each one helpful in its place — is that it tests each clause it meets to see if it is true.

```
((mother mary jesus))
```

is true because we assert it. There are no variables, so there is no way it cannot be true. However:

```
(parent X Y)
```

is only true in Prolog terms, if there is a:

```
(father X Y)
```

or

```
(mother X Y)
```

that is true.

Consider this query:

```
?((parent mary X)(PP Mary
 parent of X))
```

Prolog will first examine the clauses relating *parent* and *father*, but it will fail to find a match because *mary* is not the *father* of anyone. But — unlike other languages — it will not give up but go on to examine the next *parent* clause where it succeeds: It will return from the *mother* clause with *jesus* assigned to the variable *X*.

Here is a clause for *daughter*:

```
((daughter X Y)
 (parent Y X)
 (female X))
```

This could be expanded to say:

```
IT IS TRUE THAT X IS THE
 daughter OF Y
 IF IT IS TRUE THAT Y IS
 A parent OF X
 AND
 IF IT IS TRUE THAT X IS
 female
```

Prolog clauses can have any number of additional lines — called atoms — which may all be supposed to be connected by AND IF as above.

Here are a few more clauses:

```
((grandfather X Y)
 (father X Z)
 (parent Z Y))

((sister X Y)
 (parent Z X)
 (parent Z Y)
 (female X))
```

This one would not prevent a girl from being her own sister, so it must be modified to:

```
((sister X Y)
 (parent Z X)
 (parent Z Y)
 (NOT EQ X Y)
 (female X))
```

You will notice this new idea *NOT EQ*. This involves two of Prolog's built-in primitives. As with other languages, there is a long list of them and they are best learned a few at a time.

EQ will either make a variable equal to a constant or test if two variables are equal.

```
((test X Y)
 (EQ X Y))
?((test X fred)(PP X))
```

will give:

```
fred
```

To demonstrate how you can use these two ideas

Prolog stands for **PRO**gramming **LOGic** and was first implemented in 1972 in Marseilles by Colmerauer and Roussel. It was designed to get away from machine procedure and move towards human logic to give a language that can be applied to almost any situation.

Turn to Page 89 ►


```
((brother X Y)
 (parent Z X)
 (parent Z Y)
 (NOT EQ X Y)
 (male X))
((which (X|Y))
 (FORALL ((? Y)) ((PP X))))
((sister X Y)
 (parent Z X)
 (parent Z Y)
 (NOT EQ X Y)
 (female X))
((grandfather X Y)
 (father X Z)
 (parent Z Y))
((parent X Y)
 (father X Y))
((parent X Y)
 (mother X Y))
((mother Queen-Mother Queen-Eliz2))
((mother Queen-Mother Princess-Margaret
))
((mother Queen-Eliz2 Prince-Charles))

((mother Queen-Eliz2 Princess-Anne))
((mother Queen-Eliz2 Prince-Andrew))
((mother Queen-Eliz2 Prince-Edward))
((mother Princess-Margaret Viscount-Linley))
((mother Princess-Margaret Sarah-A-Jones))
((mother Princess-Diana Prince-William))
((mother Princess-Diana Prince-Henry))
((mother Princess-Anne Zara-Phillips))
((mother Princess-Anne Peter-Phillips))
((father King-George6 Queen-Eliz2))
((father King-George6 Princess-Margaret
))
((father Prince-Phillip Prince-Charles))
((father Prince-Phillip Princess-Anne))
((father Prince-Phillip Prince-Andrew))
((father Prince-Phillip Prince-Edward))
((father Lord-Snowdon Viscount-Linley))
((father Lord-Snowdon Sarah-A-Jones))
((father Prince-Charles Prince-William))

((father Prince-Charles Prince-Henry))
((father Mark-Phillips Zara-Phillips))
((father Mark-Phillips Peter-Phillips))
((female Sarah-A-Jones))
((female Princess-Diane))
((female Princess-Anne))
((female Princess-Margaret))
((female Queen-Eliz2))
((female Queen-Mother female))
((female Zara-Phillips))
((male Mark-Phillips))
((male Peter-Phillips))
((male King-George6))
((male Viscount-Linley))
((male Prince-Henry))
((male Prince-William))
((male Prince-Edward))
((male Prince-Andrew))
((male Prince-Phillip))
((male Lord-Snowdon))
((male Prince-Charles))
```

A Prolog database of the British Royal Family

INTERACTIVE 3D

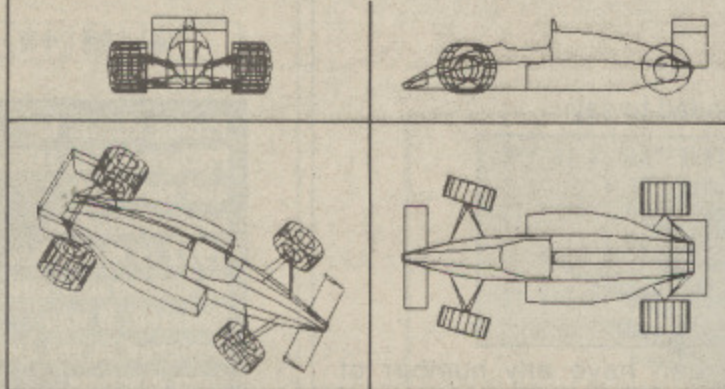

INTERACTIVE 3D is a unique program that actually allows you to create a design directly in a 3D view. And you can zoom, rotate and change view at any time to visualise the effect of design changes. Full editing facilities allow you to create and delete points and lines, and adjust their positions in any direction, all under cursor control without having to enter any numerical data. Circles can be generated automatically and symmetrical forms can be created by reflections. Designs can be saved to tape/disc and reloaded. Views shown on the screen can be saved or printed. Altogether, nearly 50 operations are included. For BBC B, B+ and MASTER series.

- * Acclaimed in reviews (Micro User, Beebug, A&B etc)
- * Widely used in schools, colleges and industry
- * Licenced to Education Authorities
- * Sold in nearly 20 different countries worldwide
- * Probably the most powerful 3D CAD system for any home micro, and at an unbelievably low price

£8.95 cassette £12.95 disc (state 40 or 80 track)



Cheque/PO to: DESIGN DYNAMICS, (C)
8 Meadow Way,
Amphill,
Bedford MK45 2QX

MODE-ØØ DUMP

640 X 512

RESOLUTION BREAKTHROUGH!

The BBC computers have quite high resolution graphics. The maximum horizontal resolution of 640 is good but the overall effect is spoiled by the mediocre vertical resolution of 256, even in MODE Ø. The same limitation applies to normal screen dumps, so the only way to obtain smooth curves has been an expensive plotter.

Nothing can be done about the screen resolution, but now our unique software, **MODE-ØØ DUMP**, provides a means of outputting graphics to a dot-matrix printer at an amazing 640 x 512 resolution. All you have to do is add two simple *SPOOL statements to your BASIC or machine code program. All the VDU data used to plot the picture are then saved to disc for use later by **MODE-ØØ DUMP**. Your program can run in any MODE - even MODE 7! (although then you won't see the results until you run **MODE-ØØ DUMP**). The dump is in one colour (i.e. as MODE Ø) and covers most of an A4 page.

A useful graph plotting program is included as an example to show you how to add the *SPOOL statements to your own programs.

MODE-ØØ DUMP for BBC B, B+ and Master computers on 5¼" disc.

£12.95 disc only (state 40 or 80 track)

Please note: **MODE-ØØ DUMP** works with most dot-matrix printers, but if ESC"" is not available (check your printer manual) then you have to omit from the dump 6% of the screen height (either top or bottom).

SPECIAL OFFER: (40 or 80 track disc only)
INTERACTIVE 3D + MODE-ØØ DUMP £20.00

You can save **INTERACTIVE 3D** pictures to use with **MODE-ØØ DUMP**

ARE YOU MAKING ENOUGH MONEY ON THE STOCKMARKET? with our Software, your computer could make you more!

'ShareMaster is a valuable piece of software . . . its analysis option can even improve your performance sufficiently to pay for itself in a reasonable space of time' - *Which PC*

'The program represents value for money which does not seem to be equalled in its field' - *Acorn User*

ShareMaster is a powerful and easy to use integrated investment system for the analysis of price trends, investment performance and portfolio profitability. The package employs a comprehensive range of advanced predictive and analytical measures to help you improve the timing and success of investment decisions.

ShareMaster's portfolio management features have been designed to meet the varying needs of private and professional investors. The charting features alone can be found only on systems costing many times the purchase price.

MAIN FEATURES . . .

* Profit Analysis facilities include Valuation, Profit Statements, Performance Reporting, Profit Analysis, etc.

* Predictive features include moving averages, log/linear scaling, point & figure, linear regression, curve smoothing, relative strength, comparisons, momentum, Rate of Change, stochastics, trendlines, etc.


* ShareMaster can maintain an extensive database of share price and purchase/sale/dividend information which can be rapidly updated, amended or displayed as required. Transactions can be entered on behalf of one or more parties and valuation/profit statements produced in seconds.

* ShareMaster is exceptionally easy to use and is supplied with a 96-page manual which includes sections on interpreting the predictive indicators provided and their use in investment strategy.

These are only a fraction of the facilities offered. ASK FOR OUR FREE COMPREHENSIVE BROCHURE.

'A sophisticated combined portfolio and price graphics program . . . comprehensive and easy to follow' - *Investors Chronicle*

'There's no reason why ShareMaster shouldn't grace the portfolio of every interested investor' - *Complete Guide to the Amstrad PCW*

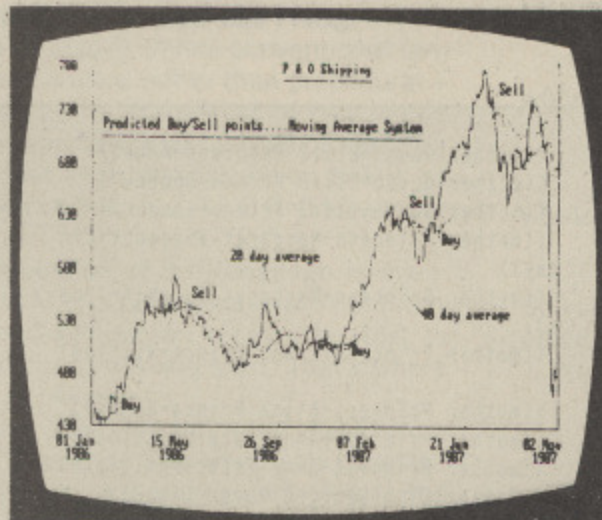

We believe that no other investment package can match ShareMaster's combination of facilities, performance, flexibility, ease of use and price. We are confident that investors will find it an indispensable aid, one which should repay your investment many times over. ShareMaster is available for most popular computers including: Amstrad/IBM PC/XT/AT and compatibles, BBC Model B and Master, Amstrad CPC 6128, PCW 8256, 8512, 9512, Atari 520 ST.

Now available - our most advanced investment analyst . . .

ShareMaster Plus offers a higher level of convenience and flexibility in addition to providing more powerful charting and portfolio analysis features. These include the ability to automatically extract prices from the Prestel Citiservice 'Fund Manager' price feed. Ask for further details on the range of additional features offered. Amstrad/IBM PC/XT/AT and compatibles only.

New release - OptionsMaster. A traded options valuation and analysis package. Ask for details.

ORDER FORM - Prices include VAT, p&p, etc. Orders normally despatched within 24 hours. Overseas orders deduct VAT but add £7 (Europe) or £10 (rest of world) for airmail despatch. Cheque, Access, Visa orders accepted. When ordering, please state your computer type. Dealer enquiries welcome.

ShareMaster - IBM/Archimedes PC Emulator £149.95

ShareMaster Plus - IBM/Archimedes PC Emulator £249.95

ShareMaster - BBC/Master/Amstrad PCW/CPC 6128/Atari 520 £99.95



Synergy Software, Dept. M, 7 Hillside Road, Harpenden, Herts, AL5 4BS
Tel.: (05827) 2977

◀ From Page 87

together the more complex:

```
((test2 X Y)
 (NOT EQ X Y)
 (PP Not equal))
((test2 X Y)
 (EQ X Y)
 (PP Equal))
?((test2 ted jim))
```

will output:

Not equal

and:

```
?((test2 fred fred))
```

will give:

Equal

You can now see how a complete family tree database can be built up. It requires data statements relating various members of the family, giving their sex, and also some rules which handle relations like brother, sister, uncle, nephew, grandparent and so on. Try to build a database for your own family and test it to see if it gives the expected answers.

The listing is for the British Royal Family, just to show how a family tree might look.

When you come to use your database, you will soon notice some interesting features. For instance, if you make a query like:

```
?((sister Princess-Anne
 X)(PP X))
```

which means, "Is Princess Anne anybody's sister?" You will get the reply Prince-Charles which is correct. However, it could also have been posed in this way:

```
?((sister X Prince-Charles)
 (PP X)!)
```

which means "Has Prince Charles a sister?" which would return Princess-Anne.

An important limitation may already have occurred to you: In neither of the previous queries have we seen any mention of Andrew and Edward, although Princess Anne is their sister too. To elicit this information we need another built-in primitive, FORALL:

```
?(( FORALL ((sister Princess
 -Anne X)) (( PP X)) )!)
```

means "For all the instances where it is true that Princess Anne is a sister, print out the last part of the term." You should see all her brothers listed.

As an alternative, we have included a clause called *which* from the dreaded SIMPLE interface – dreaded because it is anything but simple. This may be used in this way.

```
which ( X ( sister!X))
```

The ! sign indicates that sister is the head of a

list and X is its tail or remainder.

This prints the tail of each clause of which *sister* can be the head. It cuts down the typing but, as you can see, it is anything but simple to understand. We will devote a lot more space to improving the querying facilities at a later stage – it can get a bit technical – but once it is working, you don't have to worry about it further.

Editing clauses

When adding in clauses you will need to make corrections from time to time. Let's suppose that you have added several *father* clauses to your family tree database:

```
((father bob jim))
((father bob harry))
((father bob helen))
((father harry mike))
((father harry jean))
```

But *harry's* son is not called *mike* but *john*. Note that the offending clause is the fourth *father* one. If you type:

```
?((ED father 4))
```

you will see the offending clause displayed: Use the Copy and Delete keys to produce a corrected version. An alternative when the order does not matter would be to delete the offending one using:

```
?((DELCL father 4))
```

and type a new one which will appear as the last father clause.

Next you remember that *bob* has another daughter *sophie*. For tidiness you want this to go in as clause 3 so, to add a clause, you type:

```
?((ADDCL ((father bob soph
 ie) 3 ))
```

To remove the whole father relation, enter:

```
KILL father
```

To clear everything, use:

```
KILL ALL
```

You can save all your work from one session with:

```
SAVE FAMILY
```

The second word is the name to save the data under. You can catalogue your disc with:

```
**CAT
```

But to catalogue drive 1 you need:

```
**"CAT 1"
```

All star commands are available, but if they are more than a single word they must be in quotes. You can load a separate database using:

```
LOAD FAMILY
```

The microProlog utilities disc contains an editor which may be loaded for extensive editing sessions. Or you can use a word processor – provided you are careful to avoid embedded commands and control codes.

● In the second part of this series we'll take a look at artificial intelligence with a monkey, a box and a banana.

Micro Prolog

As a special deal for readers of *The Micro User*, Watford Electronics has agreed to reduce its advertised price of Micro Prolog to £50 + VAT. Just send your order to them in the usual way, stating that you have seen this offer.

Information
can be
retrieved
quite
easily

OVERSEAS MEDIA DISTRIBUTORS

COMPUTER SUPPLIES AT WHOLESALE PRICES
FREE CARRIAGE


UNBRANDED DISKS Certified & Guaranteed

	25	50	100	200
5 1/4" DSDD	£9.50	£17.50	£32.50	£62.00
Supplied with Labels, Envelopes & Write Protects				
3 1/2" DSDD	£12.50	£26.25	£54.00	£105.00
Supplied with labels				

COLOURED DISK Free Library Case

5 1/4" DSDD 48 TPI **£7.90** per box of ten
Colours: RED, BLUE, GREEN., YELLOW & WHITE

DISK STORAGE SYSTEM



YUD 50L	5 1/4" x 50	£6.25	WITH DISKS £22.50
YUDD 100L	5 1/4" x 100	£7.90	WITH DISKS £38.00
YUD 120L	5 1/4" x 120	£10.50	WITH DISKS £47.90
YUD 40L	3 1/2" x 40	£6.00	WITH DISKS £46.90
YUD 80L	3 1/2" x 80	£8.25	WITH DISKS £78.90
All with Lock & 2 Keys			

CLEANING KITS HEAD CLEANING KITS

5 1/4" **£2.50** 3 1/2" **£3.75**

ALL IN ONE KIT

- 1 Bottle General Surface Cleaner
 - 1 Bottle Anti-Static Fluid
 - 1 Bottle CRT Cleaning Solvent
 - 3 Manual Spray Pumps
 - 1 5 1/4" Floppy Head Cleaning Kit
 - 50 Lint Free Cloths
- SPECIAL PRICE £9.50**



MOBILE PRINTER STAND

Rugged steel frame.
Height adjustable basket
for output paper & base shelf
for input paper. Self assembly -
includes castors.

80 column	£45.00
132 column	£57.50

PRINTER STANDS



YU-S24 UNIVERSAL PRINTER STAND
Knock-Down type. A cantilever refold paper
trays use no table space. Fits all printers,
standard carriage and wide. Made of molded
plastic.
£19.50



YU-S25 K/D PRINTER STAND
Made of molded plastic. Feeds and
refolds paper underneath the printer,
takes up hardly more space than the
printer itself
YU-S25A: for 80 col. printer.
YU-S25B: for 132 col. printer.
80 column **£28.50**
132 column **£32.50**

PRINTER RIBBONS

	Price per Ribbon
AMSTRAD 8512/8256	£3.95
DMP 2000/3000	£2.25
BROTHER HR15MS	£2.75
CITIZEN 120D	£3.75
COMMODORE MPS 801	£4.00
DIABLO HYTPYE II MS	£1.90
EPSON FX/RX80 FX800	£2.75
MX/100/FX1000	£3.75
LX80/86	£2.25
JUKI 6100MS	£2.50
PANASONIC KXP110	£3.95
QUME IV M5	£2.50
STAR NL-10	£4.50

MOST OTHER MAKES OF RIBBON
AVAILABLE, PHONE FOR DETAILS

PLEASE NOTE PRICES ARE EXCLUSIVE OF
VAT @ 15% FREE POSTAGE IN U.K.

COPY HOLDERS



**YU-H32 COPY HOLDER
WITH ADJUSTABLE ARM**
Size: 9 1/2" x 11 1/2"
With smooth slide line
guide. **£19.50**

PLASTIC LIBRARY CASES

5 1/4" x 10	£1.75	WITH DISKS £5.90
3 1/2" x 10	£2.50	WITH DISKS £13.90

CHEQUES OR POSTAL ORDERS TO:

OVERSEAS MEDIA DISTRIBUTORS

REF AC 003, 30 GREAT MEADOW ROAD, BEAUMONT LEYS
LEICESTER LE4 0QA. TEL: 0533 340114

EDUCATIONAL & GOVERNMENT ORDERS ACCEPTED - TRADE ENQUIRIES WELCOME

DELTA COMPUTERS

BBC MASTER SERIES

Archimedes Ring for price
Master 128 £395.00
Master Compact Entry	
System £349.00
Master Compact Colour	
System £555.00

DISC DRIVES

5802 400K DS DD	
40/80T £104.95
5802DB Dual 800K	
40/80T £204.95
5802D as 5802DB+PSU £234.95
Opus DDOS (With a drive)	.. £40.00

PRINTER RIBBONS

Brother M1009 £3.25
Canon PC1080A £3.25
Epson FX, MX, RX 80 £2.70
Epson LX80, LX86 £2.70
Epson FX, MX, RX 100 £3.35
Panasonic KX-P1081 £3.99
Citizen 120D/LSP10 £4.60
Citizen MSP10,20 £2.70
Citizen MSP15,25 £3.25
Kaga 810 £3.25
M Tally MT80 £3.50
Seikosha GP100/250 £2.65
Shinwa CP80 £3.50

SPECIAL OFFERS

Tatung Std. Res. Col.

Citizen 120D £169.00	Monitor £169.00
Star NL-10 £237.00	Acorn Med. Col. Monitor £239.00
Panasonic KX-P1081 £169.00	Philips 8833 Col. Monitor	.. £259.00
Amstrad DMP3160 £199.00	Brother HR5 Printer £69.99

* A Vu-File and Vu-Calc with every Master purchased *
All orders over £100 receive free Touchpad for BBC B (only).
Worth £49.95 (while stocks last).
MINIMUM ORDER £10.00

All prices include VAT

Please add £5 carriage on orders over £100

Mail Order only at this address

Trade and Educational enquiries welcome

85 Union Street Oldham Lancs

061-626 3841



TWO WAYS TO ENSURE
YOU GET

THE MICRO USER

EVERY MONTH

1. Complete and mail subscription form on Page 159
2. Hand this form to your newsagent.

Please reserve me a copy of Micro User
magazine every month until further notice.

- I will collect
 I would like it delivered to my home.

Name _____

Address _____

Note to newsagent: Micro User should be
obtainable from your local wholesaler, or contact Mike Rice
Circulation Manager on 0424 430422

```
Words-751 10:51:39 I
```

```
10 REM Clock Source
20 REM Russell Brett
30 REM (c) The Micro User
40 MODE7:X=14:Y=0
50 osbyte=&FFF4:osrdch=&FFEE
60 osword=&FFF1:oswrch=&FFEE
70 evntv=&220:brkv=&202
80 code=&900:work=&A04
90 tim=work+8:clk_pars=work
100 flag=work+17:cl=work+16
110 secondU=work+15:second=work+14
120 dot=work+13:minuteU=work+12
130 minute=work+11:colon=work+10
140 hoursU=work+9:hours=work+8
150 countB=work+7
160 FOR LX=0 TO 2 STEP 2
170 PX=code+OPT LX
180 .par
190 LDA #entry MOD256:STA evntv
200 LDA #entry DIV256:STA evntv+1
210 LDA #&9C:STA work:LDA #&FF
220 STA clk_pars+1:STA clk_pars+2
```

If you spend a lot of your time at the keyboard using Wordwise, or you simply can't bear to be in the same room as your micro without it being switched on, then try this program. It is a digital clock designed to be used from within Wordwise — which doesn't have the built-in timer feature of the Mini Office II word processor.

To print the time on the screen while using Wordwise demands programming techniques beyond those available in Basic. To begin with, the program is intended to be run concurrently with Wordwise so it is important that it does not block the normal functioning of the word processor.

In effect, the clock routine cannot have exclusive processor access, but it must appear as though it has, since we wish the time to be updated and displayed continually.

By now it is probably clear that it is necessary to either make use of an interrupt or event routine so the clock program can be called by some predetermined signal while the word processor is still running.

There is just such an event ideal for this application — number 5 which is associated with the in-built interval timer. The operating system has, very usefully, been designed so that every time the interval timer crosses zero, an event — a pre-packaged interrupt — is triggered.

When this event is enabled the operating system jumps to the address contained in locations &220 and &221 — *evntv*. So the start address of the clock routine is placed in these locations and the operating system arranges for our program to be executed every time the interval timer crosses zero.

Type in the listing as shown and correct any typing errors using Get it Right! Save this program as CLK.SRC and then run it. The machine code clock routine will automatically be saved as CLOCK. You can then initialise it from disc by entering:

```
*CLOCK
```

As soon as the routine starts running a set of eight dots appears on the screen so that you can set up the correct time as follows:

```
hh:mm:ss
```

for hours, minutes and seconds — you can use any separator between the digits. To keep the program short there is no error checking, so take care — if you enter letters instead of numbers the routine will eventually crash.

A word to the wise — keep an eye on the clock

*Russell Brett provides an
interrupt routine to display
the time on your screen*

Clock will operate on B, B+ or the Master series in Basic and Wordwise but not View. It is not second processor compatible, and won't work on the Archimedes 6502 emulator.

```
10 REM Clock Source
20 REM Russell Brett
30 REM (c) The Micro User
40 MODE7:X=14:Y=0
50 osbyte=&FFF4:osrdch=&FFEE
60 osword=&FFF1:oswrch=&FFEE
70 evntv=&220:brkv=&202
80 code=&900:work=&A04
90 tim=work+8:clk_pars=work
100 flag=work+17:cl=work+16
110 secondU=work+15:second=work+14
120 dot=work+13:minuteU=work+12
130 minute=work+11:colon=work+10
140 hoursU=work+9:hours=work+8
150 countB=work+7
160 FOR LX=0 TO 2 STEP 2
170 PX=code+OPT LX
180 .par
190 LDA #entry MOD256:STA evntv
200 LDA #entry DIV256:STA evntv+1
210 LDA #&9C:STA work:LDA #&FF
220 STA clk_pars+1:STA clk_pars+2
230 STA clk_pars+3:STA clk_pars+4
240 LDX #5:LDA #14:JSR osbyte
250 .entry
260 LDA #1:STA flag
270 PHP:PHA:TXA:PHA:TYA:PHA
280 LDX #clk_pars AND255
290 LDY #clk_pars DIV256
300 LDA #4:JSR osword:LDA #355
310 CMP #7:BNE skipdis
320 LDA #&75:JSR osbyte
330 CPX #0:BNE skipdis
340 LDA #&86:JSR osbyte
350 TYA:PHA:TXA:PHA:LDA #0
360 STA flag:LDX #(X-1):LDY #0
370 .back
380 JSR tab:LDA countB,Y:INY
```

Turn to Page 92 ▶

◀ From Page 91

```

390 JSR oswrch:INX:CPY #10:BNE back
400 .skipdis
410 LDA secondU:CMP #ASC'9':BNE over
420 LDA #ASC'/'':STA secondU
430 INC second:LDA second
440 CMP #ASC'6':BNE over2
450 LDA #ASC'0':STA second
460 INC minuteU:LDA minuteU
470 CMP #ASC'":BNE over2
480 LDA #ASC'0':STA minuteU
490 INC minute:LDA minute
500 CMP #ASC'6':BNE over2
510 LDA #ASC'0':STA minute
520 INC hoursU:LDX #255
530 LDA #213:JSR osbyte
540 LDA #7:JSR oswrch:LDA hoursU
550 CMP #ASC'":BNE over2
560 LDA #ASC'0':STA hoursU:INC hours
570 .over2
580 LDA hoursU:CMP #ASC'3':BNE over
590 LDA hours:CMP #ASC'1':BNE over
600 LDA #ASC'1':STA hoursU
610 LDA #ASC'0':STA hours
620 .over
630 INC secondU:LDA flag:BNE miss
640 LDA #31:JSR oswrch:PLA
650 JSR oswrch:PLA:JSR oswrch
660 .miss
670 PLA:TAY:PLA:TAX:PLA:PLP:RTS

```

```

680 .tab
690 LDA #31:JSR oswrch:TXA
700 JSR oswrch:LDA #Y:JSR oswrch
710 RTS:]
720 REM
730 REM INPUT ROUTINE
740 REM
750 PX=&A16
760 [OPT LX:,:par:,:bef
770 LDX #ASC'":JSR ba
780 LDX #8:JSR ba
790 LDA #ASC'":STA tim-1:LDY #0
800 .go
810 JSR osrdch:JSR oswrch
820 BCS go:STA tim,Y:INY
830 CPY #8:BNE go:LDA #152
840 STA tim,Y:BCS continue:RTS
850 .continue
860 LDA #code MOD256:STA brkv
870 LDA #code DIV256:STA brkv+1
880 LDX #76:LDA #247:JSR osbyte
890 LDX #code MOD256:LDA #248
900 JSR osbyte:LDX #code DIV256
910 LDA #249:JSR osbyte:JMP code
920 .ba LDY #0
930 .ba2 TXA:JSR oswrch:INY
940 CPY #8:BNE ba2:RTS
950 ]:NEXT
960 $&700="SAVE CLOCK "+STR$"code"+20
0 "+STR$"bef
970 PRINT $&700
980 XX=0:YX=7:CALL&FFF7:PRINT"Done"

```

✓ Get it right!

10 = 00		
20 = 00		
30 = 00		
40 = 5FF0		
50 = C8E7		
60 = 5215	370 = 5C49	680 = E523
70 = F96C	380 = D33F	690 = 42EF
80 = D6EB	390 = 8EA0	700 = 4A27
90 = D96D	400 = 6E18	710 = 88E3
100 = 9EDA	410 = E9CB	720 = 00
110 = 4EA7	420 = D338	730 = 00
120 = 1D23	430 = F329	740 = 00
130 = E547	440 = B10A	750 = EB71
140 = 16C0	450 = B9B2	760 = DED5
150 = C73D	460 = 1BE6	770 = 6C33
160 = AAB9	470 = A776	780 = 6E0D
170 = 7CBB	480 = 6557	790 = E42E
180 = 2BD2	490 = 949A	800 = 9233
190 = 58D1	500 = B10A	810 = 7F9C
200 = E04D	510 = E903	820 = 8657
210 = 9CDD	520 = 7D4A	830 = DB87
220 = D3EC	530 = BE80	840 = F91A
230 = F343	540 = 588C	850 = 2EE0
240 = 4AA6	550 = A776	860 = 9D6E
250 = F1E5	560 = BDCD	870 = 5268
260 = 816C	570 = A4D3	880 = DC11
270 = A5E9	580 = 2493	890 = 682D
280 = 87F2	590 = 7FC3	900 = 766F
290 = 6901	600 = D08A	910 = C62D
300 = 9279	610 = 5EF9	920 = 6D77
310 = B73B	620 = 8A82	930 = F1D5
320 = 1870	630 = F51F	940 = D3FF
330 = A6CD	640 = 5198	950 = DA42
340 = C54A	650 = 862D	960 = 2769
350 = 3267	660 = B14C	970 = 4067
360 = 741D	670 = 3B9B	980 = 740C

NEW TECHNICAL REFERENCE GUIDE NOW AVAILABLE!
£12
Please contact us for further details.

At last a machine code development system that *really* does outperform ADE

System Applied Technology Ltd.

DEPT. B
Fifth Floor Sheaf House
Sheaf Street
Sheffield S1 2BP
Tel. (0742) 768682

Access and Barclaycard welcome
Further information available



Features

- Runs on BBC B, B+, Master, Compact, ADFS, DFS, ANFS, NFS
- Full use of all available RAM
- Intelligent memory management unit (MMU)
- User switches on all main features
- Automatic search for macros on disc
- Assemble absolute or relocatable code
- Source program tokenised or full text
- REPEAT...UNTIL, WHILE...WEND etc. high level language constructs
- Macros nestable to any depth
- Excellent error diagnostics
- Linker
- Editor and symbolic disassembler provided



Versions and prices

- Recommended for Master Compact...**
ADE+ MMU and 65C00 series assembler on disc (3.5" ADFS). 32K sideways RAM required.
£42.00 + vat
- Recommended for BBC B, B+ ...**
ADE+ MMU and 65C00 series assembler on 2 16K EPROMS with DFS 5.25" utilities disc.
£46.00 + vat
- Recommended for Master 128, turbo...**
ADE+ MMU and 65C00 series assembler on EPROM cartridge with 5.25" DFS utility disc.
£49.00 + vat

- Upgrade**
ADE to ADE+ (upgrade to either disc, EPROM or cartridge, you must send in ADE ROM chip)
£27.00 + vat
 - Upgrade**
ASM to ADE+ (upgrade to either disc, EPROM or cartridge, you must send in ASM ROM chip)
£35.00 + vat
- Please add £1.25 P&P per unit.



The Ultimate Assembly Language Development Tool

ADE+ is a 65C00 series assembler system supporting all the mnemonics of the 65C12 used in the latest BBC microcomputers plus the additional 'Rockwell' instructions. ADE+ is fast, faster in fact than the in-built BASIC assembler and all rival products that we have tested. The assembler produces absolute code that can be 'RUN or linker modules that can be merged with the output from other programs using the ADE+ linker. ADE+ supports a powerful linker which drastically cuts assembly time; a feature normally only found on minis and mainframes. The linker will even link the output from compilers with your assembly language programs. Full library support for both the linker and the assembler is provided - fast searching for unknown instructions in a random access macro library. ADE+ is a modular system with many modules to add later; i.e. a mouse based editor & a Z80 cross assembler! A print spooling system uses sideways RAM as a print buffer to eliminate waiting time; your listing runs off as a background job! Use the print spooler from BASIC or your own programs. ADE+ uses ALL available memory. With a second processor attached the IO processor spare memory is used as a buffer to reduce the amount of disc access. All available memory is handled by ADE+'s intelligent memory management module. Use your own favourite editor or the one provided. Assemble from disc or memory. Full utilities including librarians, converter for BBC BASIC etc. ADE+ must be the bargain of 1988!


A comparison of three 65C12 assemblers

Feature	ADE +	BBC Basic	MACROM
Number of pseudo-ops	64	4	36
Use of all available RAM	Yes	No	No
Macros	Yes	No	Yes
Relocatable output	Yes	No	No
Linker with libraries	Yes	No	No
High level constructs	Yes	Yes	No
Number of error reports	39+warnings	3+BASIC errs	20
65C00 extended opcodes	All	65C 12 only	65C 12 only
Switch of 65 C 12 opcodes	Yes	No	No
ROM size	32K	16K	16K
Disassembler	Yes	No	Yes
Label restrictions	No	Yes	Yes

ARCHIMEDIAS

ROM/RAM PODULE

This podule accepts a variety of ROM or RAM chips and includes ROM and RAM filing system software.

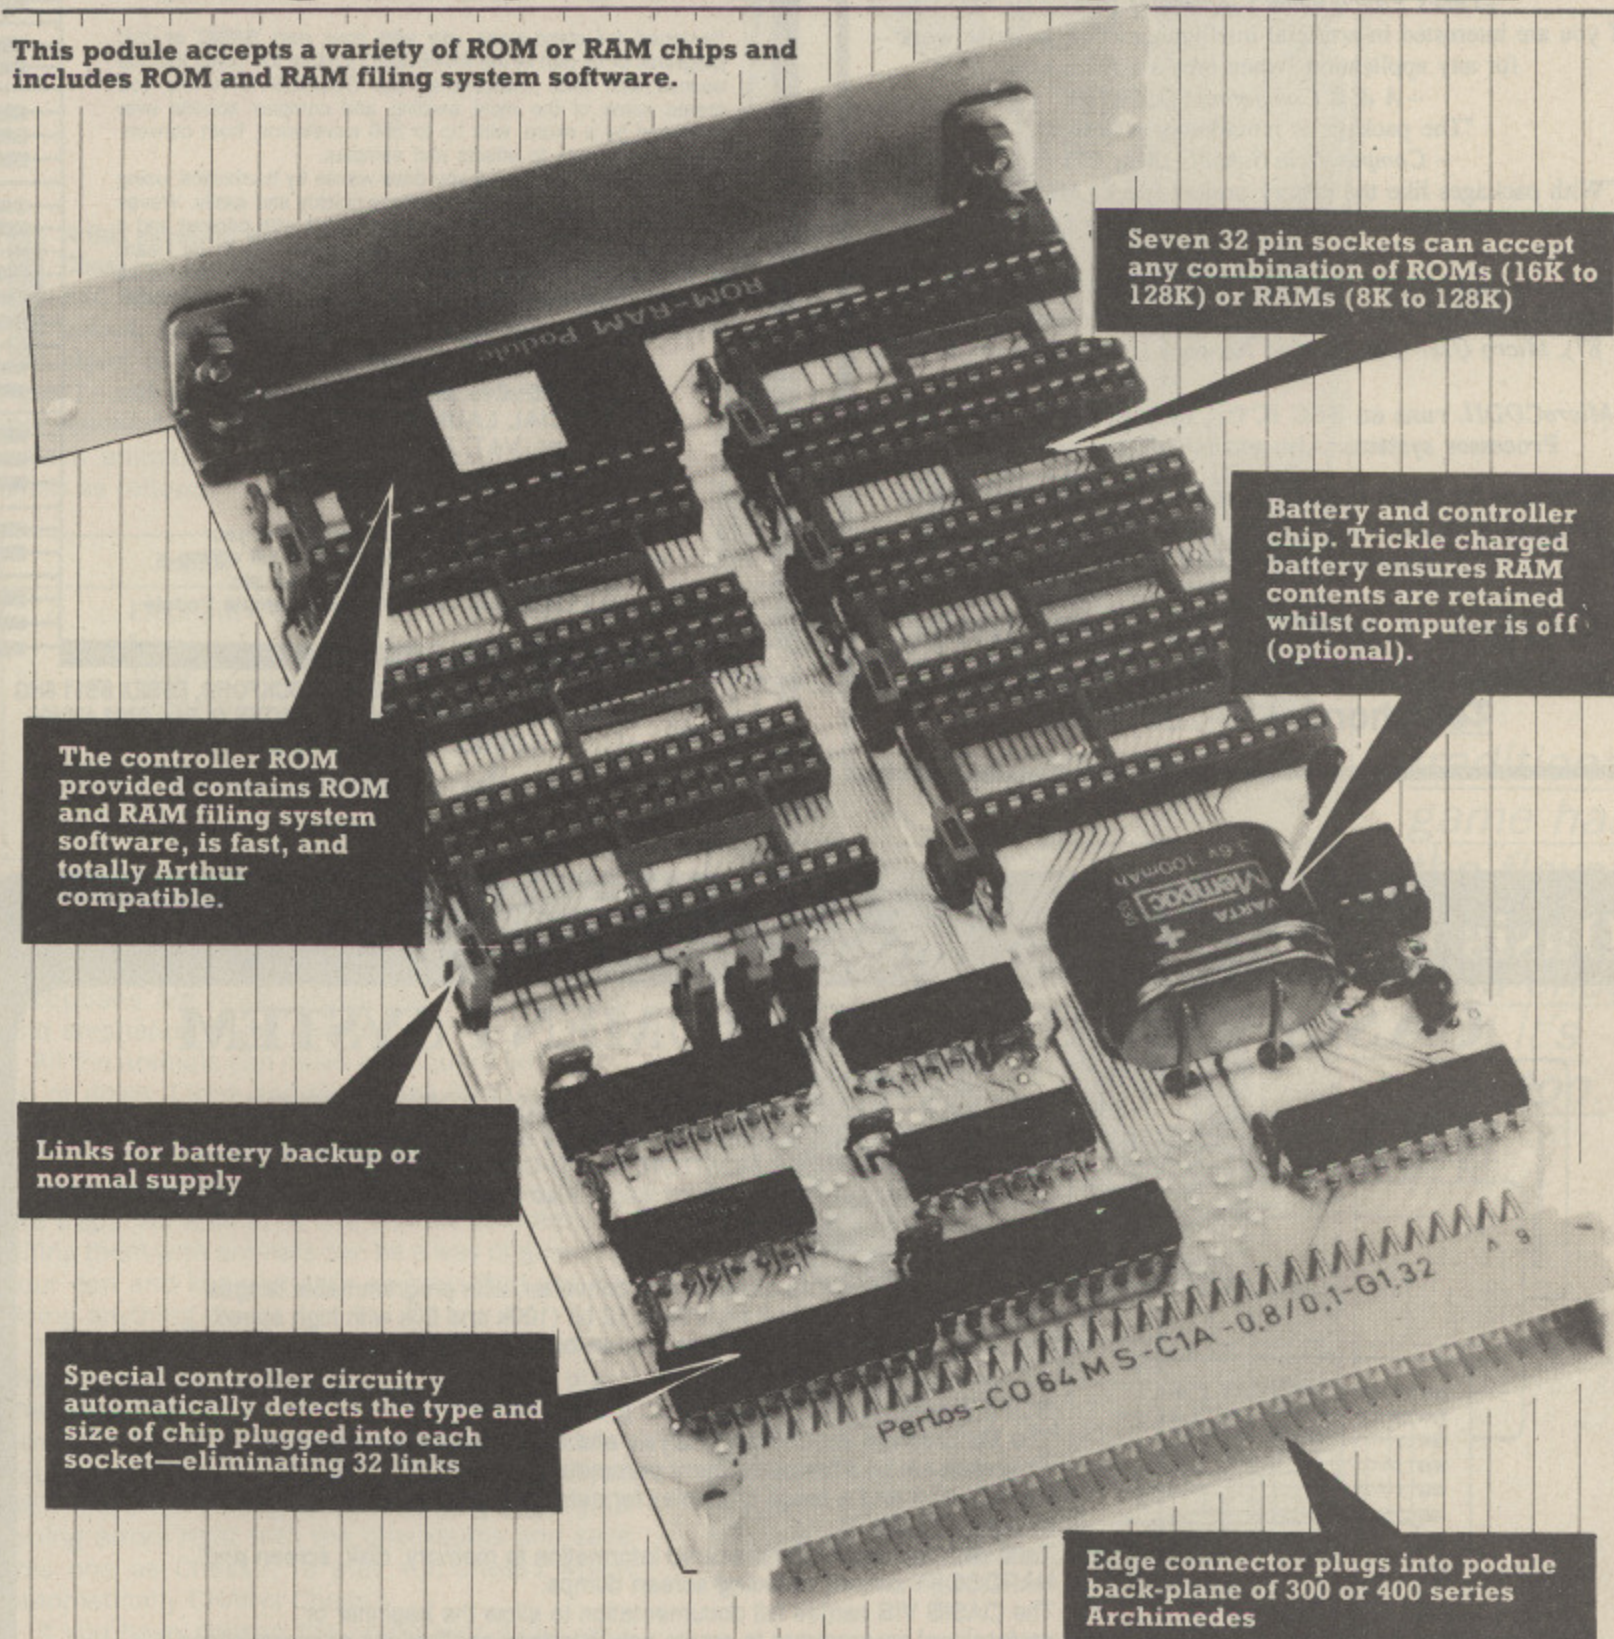

The board accepts software such as the Archimedes versions of Inter-Word, Inter-Chart and Inter-Sheet and will accept the forthcoming document processor and drawing programs. It is compatible and fully obeys all Acorn podule standards. It requires the back-plane to be installed—available from us and Acorn stockists.

£49.00 + VAT (£56.35) standard
£59.00 + VAT (£67.85) with battery
and controller chip

Computer Concepts Ltd

Gaddesden Place
Hemel Hempstead
Herts HP2 6EX.

Telephone 0442 63933

ACCESS & BARCLAYCARD ACCEPTED

MicroCODIL

An Expert Tool for Introducing Information Technology across the Curriculum

"The potential for its use in schools is enormous"
- *New Scientist* (24/9/87)

"Its ability to deal with real-life information is very impressive"
- *Times Educational Supplement* (6/11/87)

"If you are interested in artificial intelligence or in database work -
for any application - then take a serious look"
- *A & B Computing* (Dec 87)

"The package is remarkably effective"
- *Computers in Schools* (May 87)

"With packages like the history project (pack) *MicroCODIL* is
potentially a very powerful teaching tool"
- *Your Computer* (Oct 87)

There are other highly favourable reviews in *A & B Computing*
(April 87), *Acorn User* (Nov 87), *Educational Computing* (April
87), *Micro User* (Feb 87) and *Network User* (Mar/April 87).

MicroCODIL runs on BBC B, B+, Ecomet, Master and 2nd
Processor systems. Also available for Archimedes

Phone now for a free leaflet, or send £5 for a BBC DFS 40/80
demonstration disc containing a chemistry data base and a
historical mini expert system.

CODIL Language Systems
33 Buckingham Road, Tring, HP23 4HG
Telephone: (044282) 4895

EMR

ANNOUNCES A GREAT WAY TO MAKE MUSIC
WITH THE

ARPEGGIO MUSIC SYSTEM FOR THE ARCHIMEDES

- NOW AVAILABLE -
THE FIRST PACKAGE IN THE SYSTEM
SOUNDSYNTH

Designed for stand-alone use with your own BASIC or m/c
programs or as part of the ARPEGGIO system for using internal
sounds with MIDI instruments, the SOUNDSYNTH lets you
create some of the most exciting and complex sounds ever
produced by a micro, with up to 256 waveforms, from conven-
tional instruments to effects and samples.
Powerful editing facilities let you draw waves by harmonics, using
the mouse or mathematical equations quickly and easily. Waves
can be linked for on-screen Fourier analysis with printout and a
built-in micro "keyboard" enables pitched sounds to be heard
during creation. A sound library can then be made and stored as
a separate relocatable WAVEFORM MODULE for use in other
programs.


RRP £49.95 including VAT
SPECIAL LAUNCH PRICE £39.95
inc. VAT, P&P £2.00 extra
For minimum 1 Mb system

NEW! Add a superb Sound Sampler to your
Archimedes and use with Soundsynth's full editing
and storage options, including echo, etc.
Price only £126.50 inc. VAT for Sound Sample Podule




EMR LTD., 14 MOUNT CLOSE, WICKFORD, ESSEX SS11 8HG
Tel.: 0702 335747. Telex: 99473 INTER G. Fax: 0702 430405
- ACCESS & VISA ORDERS ACCEPTED -

For further information on Computer MIDI music please write or phone



Oasis Instruments

OASIS VIRTUAL INSTRUMENT SYSTEM

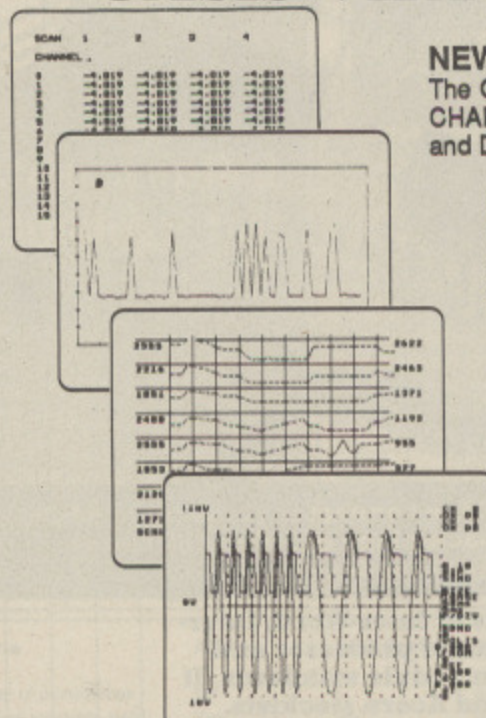

NEW VERSION - NEW INTERFACES - HIGH SPEED OPTION

The OASIS Virtual Instrument System (VIS) emulates conventional OSCILLOSCOPE,
CHART RECORDER, PROCESS MONITOR, MULTI-CHANNEL DVM, X/Y PLOTTER
and DATA LOGGER in one easy to use package. Also Spectrum analysis.

HARDWARE

VIS includes a precision 16 channel A-D converter, with programmable ranges
and read rates of 50k R/s at 8 bit, 25k at 12 bit (100k and 60k with high speed
option). This simply installed unit has proven long term stability and reliability.

SOFTWARE

The Menu-driven acquisition, analysis and display programs combine
on-screen set up of measurement parameters, SPREADSHEET data
manipulation and a range of display formats, with ZOOM and ON-SCREEN
MEASUREMENTS.

Total data mobility from measured information to memory, disk, screen and
HARDCOPY output, including screen dumps.

The OASIS VIS carries full documentation to allow the beginner or
professional programmer to create new interface applications or personalised
instrument emulations.

PRICE

The price of the complete system is less than any one of the instruments it replaces.
Prices exclude VAT, P&P (£8). High speed option add £160.

The Virtual Instrument System is supplied complete - no further components are
required - just plug in to your laboratory computer.

Digital to Analogue and industrial interface options - POA

For fast delivery, phone your order
on 0603 747887. Technical queries
answered and requests for further
information on this number.

PC-XT/AT - £499, Nimbus - £499, BBC/Master - £399, New Archimedes Version - £499

The Street, Old Costessey, Norwich NR8 5DF.
Tel: 0603 747887

Design Consultancy

Chinese Chess

In this excellent version of the traditional Chinese Chess you can play against another player or your BBC Micro – which incidentally plays very well indeed. You use animals as chessmen, and the object is to occupy your opponent's den – see Figure 1 – with one of your eight animals while stopping your opponent from occupying yours.

Each animal has its own ranking in the food chain as follows:

Animal	Rank
Elephant	1
Lion	2
Tiger	3
Leopard	4
Wolf	5
Dog	6
Cat	7
Mouse	8

An animal can eat the ones below it in the food chain. A dog can eat a cat and a mouse, a wolf can eat a dog, cat or mouse and so on. The exceptions are mice, which can eat elephants, and elephants, which cannot eat mice.


All the animals can move one square left, right, up or down. Lions and tigers can jump over the water horizontally but not vertically and mice can swim in the water.

Surrounding the dens are three circles: These are traps. An animal in one cannot be eaten, so filling them with animals can be a way of guarding your den and keeping safe animals that are not doing anything else.

The program is in two parts. The first defines the graphics for the animals and the second plays the game. Type in Listing I and correct any typing errors using Get it Right! Then save it as Chess1 – you can run this program alone to test it. Type NEW and enter Listing II, again putting any of your typing errors right with the checksums and save this one as Chess2. To play, run Chess1 which automatically CHAINs Chess2.

If you have chosen the one-player game your pieces are the white ones at the bottom of the screen and the micro's are the blue ones at the top. For the two-player game, the first has the white animals and the second has blue. In both games there is a cursor which is moved using:

Z	Left
X	Right
*	Up
?	Down
Return	Select

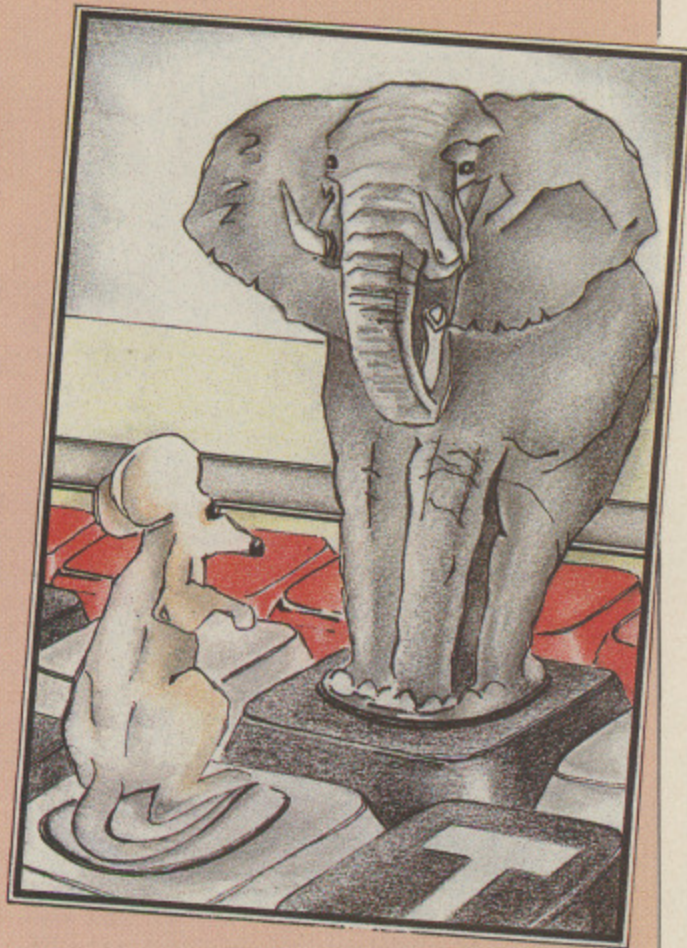

Daniel Tang's version of this traditional game has the flavour of a fast food chain. And it's fun, too.

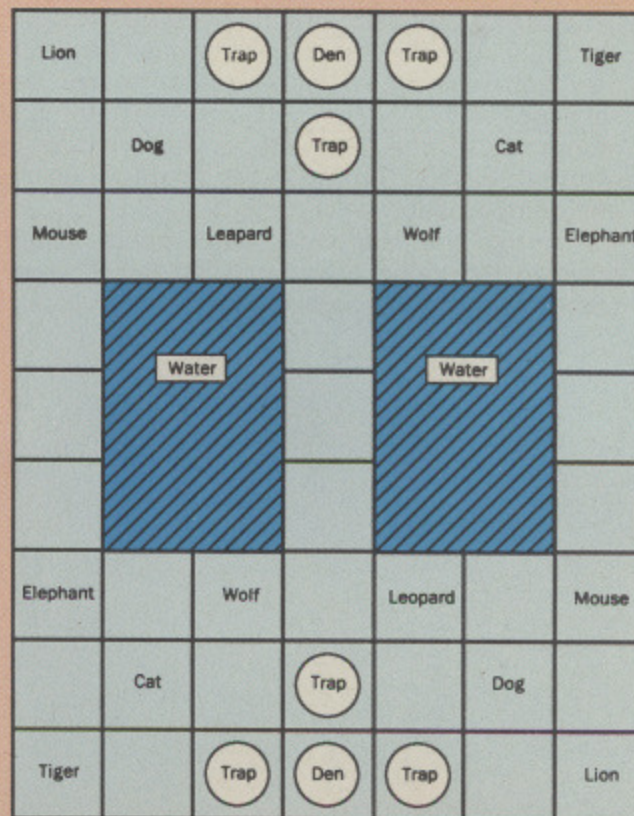


Figure 1: The playing area and starting positions

Listing I

```

10 REM Chinese Chess
20 REM By Daniel Tang
30 REM (c) Micro User
40 MODE7:PROCKEYS
50 MODE1:VDU19,2,6;0;
60 VDU23;8202;0;0;0;
70 PROCCHARS:MODE7
80 CHAIN"CHESS2"
90 DEF PROCPCCHAR(X%,Y%,CX%)
100 XX=XX-1:YY=YY-1
110 WX=88FF+72*(CX-1)
120 MX=83008+XX*64+YY*8780
130 FOR XX=MX TO MX+8500 STEP 640
140 FOR YY=XX TO XX+32 STEP 16
150 FOR CX=YY TO YY+7
160 WX=WX+1:ZX=?WX
170 ?CX=?CX EOR (ZX AND &F0)
180 CX?8=CX?8 EOR (ZX AND &0F)*16
190 NEXT: NEXT: NEXT: ENDPROC
    
```

Turn to Page 147 ▶

Cutting cost of comms

Steve Gold looks at two new money-miser MicroLink modems

UNTIL quite recently the price of modems capable of 1200/1200 baud full duplex – known as V22 in communications parlance – placed them beyond the reach of many home communications enthusiasts. This was due, in part, to the price and relative scarcity of the chip set sitting at the heart of such modems.

Lower speed ones – 300/300 and 1200/75 baud – use a different method of encoding the BBC Micro's serial output on to the modem, so in a multi-speed unit two chip sets are required – one for the 300/300 and 1200/75 baud rates and one for V22 and above.

Now MicroLink has launched a dual speed modem – 300/300 and 1200/75 baud – with a price tag of £99 and a multi-speed one – V22 – costing just £169. And, as if that wasn't enough, they both come with lead, free software, free subscription to the MicroLink service and the first month of use free of charge as well. The last is worth at least £20 to a typical MicroLink user – and quite probably a lot more.

It brings the MicroLink multi-speed modem down to the same price level as earlier lower-speed modems – an amazing feat. So let's look at

the hardware in more detail.

The modem is colourful and, unlike many others, the MicroLink unit looks quite snazzy in red and black livery. The front panel has a group of six LED status lamps on the left, while the rear of the unit has a fixed telephone cable for connection to a standard BT series 600 wall socket. Provision is made for the onward connection of a standard BT phone through a socket on the rear.

Power is supplied by an external moulded 240v mains adapter which plugs into the back via a round DC power connector.

Snugly alongside the phone and power connections is a 25 way serial – RS232C – port. As is usual with such connectors, the socket is of the female variety and the cable to connect it to your BBC Micro is supplied with the package – itself a saving of between £5 and £8.

Preparing the modem involves plugging the mains adapter into the power socket, connecting it into a BT wall socket and linking a phone to the modem itself. The final connection is made by linking up the BBC Micro with the supplied serial cable.

When you switch the modem on, the left-most



of the six LED lamps on its front fascia glows brightly. This indicates that it has powered up correctly, but not that the micro is communicating with it. This connection is tested by loading the communications software, selecting communicate and keying the Hayes command prefix AT followed by Return. If all is correct, OK will appear on your screen.

Having put the modem heavily through its paces for this review, I can report that the unit is as Hayes compatible as is possible for one which also supports 1200/75 baud – a rate not included in the official Hayes standard in the US.

Controlling its functions proved to be easy using the software supplied. Connecting to other multi-speed modems with any multi-speed modem like the MicroLink unit can prove a little tedious, since each dutifully scans up and down the available baud rates looking for a steady carrier to lock on to.

Listening to two such modems attempting to lock on to each other is a bit like walking down a packed street. As you bear slightly left to avoid a shopper bearing down on you at a fair rate of knots, so he bears slightly to the right. As you duck and weave, so it seems that your opposite number compensates against your every move. My own solution in the street is to stick to the direction in which I am travelling and let the other person get out of the way.

The communications equivalent of this problem for Hayes-compatible modems is to reset one or more S registers so speed seeking is disabled and it is locked on to a single baud rate.

Setting any modem internal software up is a little time-consuming, and the MicroLink one solves the problem in one of two ways: Either you disable the speed-seeking facility and write the new parameters to the modem's non-volatile memory, or you add a dialling suffix to the modem ATD command to indicate that you wish to over-

ride the auto-configuration software.

One possible problem a few users may encounter – myself included – is that the power supply is housed in the plug unit itself and adds considerably to its size.

This means that if the power unit is to be used in houses with sockets low down on the skirting board, or multiple power outlets in a back-to-back matrix, some juggling is required. My own solution was to buy a two-way mains adapter and use it to move the socket further back from the wall, allowing more room for the unit to be plugged in.

The included software is derived from the communication and word processing modules of Mini Office II – the best-selling integrated business office software for the BBC Micro. It performs well and I'll be looking at it in more detail next month.

The A5-sized manual proved to be excellent and well-thought out. It is split into several distinct sections – including a quick-start preface for newcomers to comms – and gives precise details of the modem's many functions. The only thing I missed was the lack of an alphabetic index at the back, but the comprehensive chapter details in the manual go some way towards compensating for this omission.

The MicroLink multi-speed modem looks unbeatable with its current £169 price tag. Even if you don't need the freebies offered with it, judging by current retail prices, the hardware alone is worth almost £100 more.

Price: £99 (dual speed), £169 (multi-speed)
Supplier: MicroLink Communications Ltd, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP
Tel: 0625 878888.



Points for:

- Low price
- Software and lead included
- Free month on MicroLink

...against:

- No index in manual
- Bulky power unit

The bottom line...

Excellent value for money even if you don't need the free offers that come with them.

ICARUS

£9.95
cassette
BBC Model B, B+,
Master and Electron

£11.95 disc
BBC series:
5¼" or 3½"



Split-screen action with different views for each player. When you are both in the same area the views are the same.

Crack the code to the forcefield, pass through the portals to raid the area of valuable credits, then head for the lift.

Now **TWO**
can play – and
experience ...

THE CHALLENGE OF A LIFETIME!

Starship Icarus is plummeting towards the sun, and the only hope of averting the impending cataclysm is for you to teleport on board, disable the master computer and regain control...

This spectacular fast-action game has a unique split-screen which means that one player can complete the game on his own – or play simultaneously with a friend – to fight the trigger-happy droids which infest the ship. With 20 levels of nerve-racking excitement, forcefields, mines,

electronic doors, emergency lifts, movable walls, and opportunities to build up your armour, blaster and health ratings, this is one game you won't complete in a few weeks!

There can be no doubt that Icarus, with its incredible one- or two-player action, is one of the most exciting games ever created for the BBC Micro and Electron.

Check it out for yourself –
and take up the challenge!

Icarus is the result of six months' intensive work by Powerhouse Software, the programming team which developed the top-selling Dunjuz. A full three months has been spent play-testing and fine-tuning to produce an addictive challenge with a gameplay that's really out of this world!



MANDARIN

SOFTWARE

Europa House, Adlington Park,
Adlington, Macclesfield SK10 4NP.

TELEPHONE ORDERS: 0625 879920 ENQUIRIES: 0625 879940

Available from all good stockists or order direct by sending a cheque or postal order made payable to Mandarin, together with your name and address. Access or Visa owners: Phone our hotline or send your card number with your order. Price include P&P.

April 1 to 7

T/OSB20 **B/OSB20**

Osbits is a 26-part course to help you understand BBC Micro assembly language. Module 20 looks at real numbers and shows how to achieve fixed point arithmetic and the accompanying program – B/OSB20 – uses Basic integers to illustrate a simple fixed point system.

T/SWR22 **RFSgen**
AutoRFS **Demo**

This week's module looks at the rom filing system – an alternative to disc or tape – and can store programs and/or data there either

T/SWR23 **RFSgen**
AIRFS **Demo**
RFShead

T/SWR23 offers a more complex header for roms containing RFS software. Such a header is only required in one of the RFS roms, and includes extended HELP messages, auto-boot feature and a new star command to run programs. Detailed instructions are included for novice Basic programmers.

ETFS
Using teletext on an Econet system simply requires one BBC Microcomputer System Teletext Adapter and this Econet file

file T/OSB22 shows how the addition and subtraction procedures – as applied to integer numbers – must be altered for use with floating point values.

T/SWR24 **RFSgen**
ModOne **Demo**
ModTwo

A look at how to overcome the problems of assembling up to 16k or more of code residing in sideways ram when the BBC Micro leaves as little as 8.75k for the source code.

Cities **Note**
Dist
Calculate the shortest distance

ways ram offers a complete index to all 24 modules.

DT **Text**
A traditional adventure based on role-playing fantasy games. Your objective is to escape, but you must first destroy the Demon's Tomb.

Circuit **Divide**
Bridge **RCL**
Circuit allows the analysis of electronic circuits containing resistors, inductors, capacitors, current and voltage sources. The details to be analysed are entered in text form and can be studied under the influence of either a DC or AC supply.

Pipeline
Re-build the plumbing in this popular game from the March 1988 issue of *The Micro User*.

April 29 to May 5

T/OSB24 **B/OSB24**
Osbits continues with a brief overview of sideways roms. For those not following the series, T/OSB24 offers a description of the principles of paged roms and briefly lists the service calls that pass through them.

PROCON **PR/Info**
This is a rom image suitable for loading into sideways ram or blowing into an eprom. It offers a range of useful additional star commands:
*AMEND allows you to amend the load or execution addresses of any file held on disc
*CONV converts between decimal, hexadecimal and binary numbers
*DKEY displays the Ascii, hexadecimal or binary value of any key pressed
*MSEED fills a specified section of memory with any given byte
*RCOPY and *SCOPY give very versatile file copying facilities.

CYMRAEG **DATAUN**
CREWR **DATADAU**
GEIRIAD **PEDWAR**
SAESNEG **MEISTR**
HYFFOR

Use BBC Basic, but program in Welsh. This amazing utility will allow you to translate your existing Basic I, II, or IV into Welsh by producing a sideways rom image of the Welsh version. From then on, use the Welsh Basic keywords as listed in the two dictionaries – GEIRIAD and SAESNEG.

Kong
Fly your helicopter to rescue King Kong's victims, but watch out for those deadly rocks in this action-packed game from the April 1983 issue of *The Micro User*.



Guide

B **B+** **M**

Software is currently transmitted for a period of one week. The teachers' notes for the TV series Issues are transmitted from Wednesday to the following Tuesday and all other files are updated on Fridays. There will be periods during the update day when the files are unavailable. The program details given are provisional.

permanently on an eprom or temporarily in the volatile sideways ram.

AutoL
ATS has a very user friendly way of downloading the telesoftware broadcasts but AutoL makes this process even simpler, and automatic.

ScopeD
More data files to accompany last month's broadcast of the Data-scope suite of programs.

SSTrade
Step back in time and become the captain of a trading ship sailing the South China seas. This one-player game involves a lot of skill.

Minicom
Speed up your graphics routines with this Basic compiler from the March 1988 issue of *The Micro User*.

April 8 to 14

T/OSB21 **B/OSB21**
The osbits course continues with a further look at real numbers, and demonstrates an algorithm to plot a crude diagram showing the Mandelbrot Set. This is explained in the text file T/OSB21.

server software. All the normal teletext facilities are then available from any station on the network, and even across a network bridge.

Eclipse
This is a program based around the concept of several membanks. It can be used to store notes, messages, program sections, complete machine-code routines, Macro commands or any other data. It can act as an extended function key and the contents are retained over a hard break, and can be accessed from any programming language. Eclipse also provides a host of other features.

Bingo
This program, from the March 1983 issue of *The Micro User*, simulates a bingo number selecting machine. It prints the numbers on screen, small for the caller, large for the audience and has recall facilities.

April 15 to 21

T/OSB22 **B/OSB22**
This week's osbits module continues the study of performing mathematical functions from machine code with a look at floating point arithmetic. The text

between any two cities – enter their names, and the length of the journey between them will be shown. Alternatively, if the chosen positions do not appear on the comprehensive list of cities available, just enter the longitude and latitude of the two points in question.

TeleCat
An alternative automatic file downloading system that requires minimal interaction between you and the computer to instigate the downloading of all the files you want from the telesoftware broadcasts.

Strike
Zap four types of nasties in Air Strike: A fast, furious and very colourful arcade extravaganza from the May 1983 issue of *The Micro User*.

April 22 to 28

T/OSB23 **B/OSB23**
Osbits part 23 continues the study of floating point arithmetic with a description of multiplication and division using the BBC Micro assembler.

T/SWR25
The concluding part of the series explaining the mysteries of side-

Watford Electronics

Jessa House, 250 Lower High Street, Watford WD1 2AN, England

Tel: Watford (0923) 37774 Tlx: 8956095 Fax: 01 950 8989



The choice before and after the experience

Acorn
The choice of Experience

Shop Hours: 9am to 6pm (Mon.-Sat.) Thursdays 9am to 8pm

All prices exclusive of VAT; subject to change without notice & available on request.

Credit Card Orders (ACCESS & VISA) Tel (0923) 33383 or 50234 (24 Hours)

Archimedes *micro*

A Computer for BUSINESS, RESEARCH, EDUCATION & HOME USE

ARCHIMEDES PRICES

305 Series	
● Entry System	£699
● with Green Monitor	£749
● with Colour Monitor	£899
310 Series	
● Entry System	£775
● with Green Monitor	£825
● with Colour Monitor	£975
310M Series	
● Entry System	£835
● with Green Monitor	£885
● with Colour Monitor	£1035
440 Series	
● Entry System	£2299
● with Green Monitor	£2349
● with Colour Monitor	£2499
(Securicor carr. £7 on Micros)	
● 0.5 Mb RAM for 305	£85
● Podule Backplane	£37
● ROM Podule (Computer Concepts)	£49
● Archimedes Ref Manual	£29
● ARM Assem. Lang Prog Manual	£12
● 2nd 800K floppy disc drive (for 305, 310 & 410)	£125
● Econet Network Board	£43
● Backplane for 2 podules, with fan (305, 310)	£39
● I/O Podule (with User port, Analogue port & 1MHz bus)	£79
● MIDI add-on to I/O Podule	£29
● ROM Podule (takes five 8 bit ROMs, of 16, 32, 64 or 128K)	£59
● Real time Video Digitiser (Watford)	TBA
● Sound Sampler (Armadillo)	£110

WORDPROCESSORS

Wordwise +	£20	View	£50
Graphic-Writer	£26	Viewspell	£32
Interword ROM	£39	ViewIndex	£13

DATABASES

System's Delta Plus	£60
AlphaBase	£43
Viewstore	£52

SPREADSHEETS

Intersheet ROM	£39	Viewsheets	£50
----------------	-----	------------	-----

BUSINESS GRAPHICS

Interchart ROM	£25
GammaPlot	£30

INTEGRATED PACKAGES

Logistix - Database, Spreadsheet, Time Management & Business Graphics	£95
--	-----

GRAPHICS, ART & DESIGN

Interchart	£25	Gamma Plot	£30
Artisan	£34	Gamma Plus	£60
Zarch	£17	Toolkit (Beebug)	£33

PC EMULATION Pack

(for 310, 410 & 440), including MSDOS 3.21	£89
--	-----

LANGUAGES

ANSI 'C'; ISO-PASCAL; FORTRAN 77;	£95 each
Cambridge LISP; PROLOG X	£199 each

TWIN EDITOR	£29
-------------	-----

SPECIAL OFFER

With every Archimedes Micro purchased from us, we are giving away absolutely FREE a 5¼", double sided disc drive with PSU, (1 Megabyte unformatted), plus the special Archimedes interface cable, worth £125.
(P.S. This offer does not apply with 0% finance scheme mentioned below).

0% (APR) FINANCE

For a limited period, Watford Electronics are able to offer the Archimedes range of microcomputers at 0% (APR) finance. Credit facility available subject to status. Please inquire for further details.
(Watford Electronics are Licenced Credit Brokers)

NEW

CREDIT TERMS now available. Please telephone or write in for further information.

Archimedes to BBC SERIAL LINK

Using this simple data link, it is possible to solve all your BBC to Archimedes data transfer problems. The kit is supplied with a disk, and the necessary cable to connect the two computers. Using this package it is possible to transfer any data from the BBC to Archimedes at upto 19200 baud.
By far the easiest way to transfer data to your new computer.

Only £25

Archimedes 5¼"/3½" Disc drive Interface

With this interface it is possible to connect almost any 5¼"/3½" disc drive with its own power supply to the Archimedes. Upto FOUR drives can be connected and NO SOLDERING is involved. Supplied complete with necessary lead.

Only £25

Note: This is not simply a lead. Attempting to connect an external disc drive by direct connection may result in damage to your Archimedes.

Archimedes Printer Lead	£8.50
Archimedes Monitor Lead	£7.50

The 80186 Co-Processor

This package consists of the Master 512 board, Watford Co-Pro Adaptor, 1770 Disc Upgrade and Acorn ADFS. This is a complete package, with its own power supply, ready to interface with your BBC Micro. The Master 512 board using the 80186 16 bit Processor at 10MHz and running Digital Research DOS Plus, gives a high degree of IBM compatibility at an extremely reasonable price. Included in the 512k package is a mouse and the amazing Digital Research GEM suite of software; GEM Paint, GEM draw and GEM desktop giving a complete Mouse Icons environment (All other GEM packages will work on the 512k). Famous packages that will work with the 512k board include Wordstar, Dbase II, Lotus 123 and many others. The only requirement to upgrade any BBC Model B to this system is you must have twin 80 track disc drives.

£259

BBC MASTER

BBC MASTER 128K Micro incl. Acorn's: View, Viewsheets, ADFS, BASIC Editor & TERMINAL £379

SPECIAL OFFER

FREE... £105 worth of Hardware & Software

Gemini's OFFICE MATE & OFFICE MASTER packages on Disc consisting of: Database, Spreadsheet, Beebplot graphics. Accounts packs: Cashbook, Final Accounts, Mailist, Easyledger, Invoice & Statements, Stock Control and Watford's 3½", double sided 1 Megabyte (unformatted) single disc drive complete with cables, ready to connect to the micro - with every BBC Master purchased from us this month.

BBC MASTER with Turbo Board + above SPECIAL OFFER £475

512K Processor Add on Board "inc. Mouse and GEM package" £185

BBC AIV (Domesday) System £4479

ADD-ONS & ACCESSORIES

Turbo 65C102 Add-on Module	£95
Econet Module for the Master	£40
Twin ROM Cartridge for Master	£7.50
Quad ROM Cartridge for Master	£12
Universal Processor Adaptor	£75
Master Reference Manual I	(No VAT) £14
Master Reference Manual II	(No VAT) £14
Master Advance Ref. Manual	(No VAT) £19
64K Upgrade Kit for B+	£32
Acorn 1770 DFS Kit complete	£41
ECONET Upgrade Kit for BBC	£42
ALL ECONET UPGRADES Available	
ARIES' Professional IEEE Interface	£238
Acorn IEEE Interface Complete	£265
Morley Teletext Adaptor with ATS Rom	£99
Filestore E01	£825
Filestore E20	£705


BBC MASTER COMPACT

All Master Compact Microcomputers are supplied complete with an integral 3½" Disc Drive and various educational and professional bundled software.

System 1 Standard Package	£310
System 1A System 1 + TV Modulator	£322
System 2 System 1 + Green Hires Monitor	£364
System 3 System 1 + Medium Res Colour Monitor	£478
RS232 Kit for BBC Compact	£25
Additional 3½" Drive for BBC Compact (Securicor carriage £7)	£90

Watford Electronics are the main Approved Stockist of ACORN SPARES and ECONET Referral Centre

Z88 Sinclair's Portable Micro

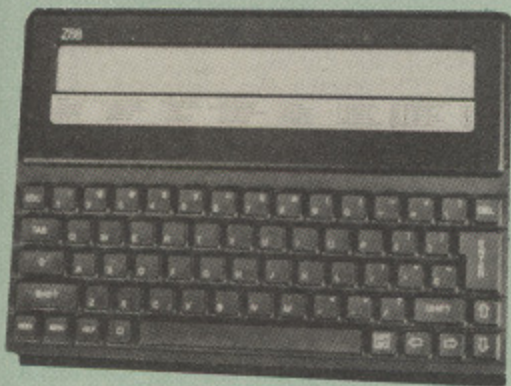

FREE Price: £239

As an introductory offer, we are giving away, 4 rechargeable batteries and a compact Mains Battery Charger absolutely FREE with every Z88 bought from us this month.

ACCESSORIES

Mains Adaptor	£8.65
32K RAM Pack or 32K EPROM Pack	£17.35
128K RAM Pack or 128K EPROM Pack	£43.40
Z88 BBC or PC Link	£21.70
Z88 EPROM ERASER	£34.75
Serial Printer Cable	£8.65
Parallel Printer Cable	£24.00
Z88 Modem	£86.90
AA Nicad Rechargeable Battery	£1.50
Battery Charger, Compact & Fast (3 Hours)	£6

65C102 2nd PROCESSOR

(65C102 replaces the original Acorn 6502 2nd Processor)

This amazing package consists of the Acorn 65C102 'Turbo' Board, the Watford Co-Pro Adaptor and Acorn 1.2 DNFS ROM. The 'Turbo' board, running at 4MHz with 64k of additional RAM will increase the speed by between 50 and 200% depending on the application running, and allow a BASIC program of upto 44k in any screen mode. Simply by plugging in the Co-Pro and the DNFS ROM with its special Tube host code and you massively increase the power of any Model B. This is a complete package, with its own power supply, ready to interface with your BBC Micro.

£135

CO-PRO Adaptor



Now for the first time you can add the Master Co-processor boards, to your standard BBC model B, or B Plus. With this brand new launch from Watford Electronics you can attach any BBC Master co-processor to the original BBC Micro. Once again Watford strides ahead with a new concept in BBC B Micro add-ons. This unique external Co-Pro Adaptor, is protected by patent applications.

Use the super fast Turbo Board with your BBC B, it is much faster than the 6502 2nd processor superseding it.

With the 512K addon your standard BBC machine achieves IBM PC compatibility at a realistic price running GEM, Lotus 123 and many other programs. Included with the 512k package is a high precision mouse and the Digital Research GEM suite of software; GEM Desktop, GEM Write GEM Paint. This requires both the 1770 DFS and the ADFS to be fitted to your computer.

To use other co-processors you require a BBC B with DNFS 1.20 or higher, or BBC B+ fitted with 1770 DFS 2.20 or greater. Co-processors work exactly like a second processor.

Master owners may use Co-Pro to add a second Co-processor externally.

Watford, brings power to your BBC at only:

£35 (carr £5)

NEW

BBC PCB DESIGNER

At last! A PCB design package for the BBC Micro that eclipses some industry CAD software. Hard to believe, isn't it? Just look at some of the impressive package specification:

- Library Component Designer
- Component Library (over 200 parts)
- Component List Editor
- NetList Editor
- PCB Board Designer
- Plotter Driver
- Dot Matrix Printer Driver

This integrated suite of programs is packed full of sophisticated PCB related features making the design of a circuit board a dream instead of a nightmare.

Input for the design may be manual, taking components from the library and connecting them, or highly automatic starting from a netlist and list of components. In auto mode, PCB Designer will never allow you to forget a connection again! And of course, either in manual or auto mode, connectivity is maintained no matter how you later move the parts around and rotate the tracks. Connections snap together and angles are corrected, Through hole vias and track thickness are established automatically and many more features, far too numerous to mention here, are included in the system.

Some of the PCB Designer's features are:

- Over 120 library pad sizes/shapes
- Four colour adjustable palette
- Zoom range 2:1 to 1:4
- Highlighting of specific tracks
- Normal and surface mounted components
- Rapid screen review
- Menu driven
- Variable gridlock
- Switchable measurement grid
- Pre-select pan/scroll facility
- Large 24" x 24" Board size
- Copy route facility
- Connectivity held at all times
- Ratsnesting of part connections
- Auto-placement of text references
- Text linked to parts
- Automatic placement of vias
- Printer and plotter outputs provided
- Comprehensive manual

TYPES OF PLOT OUTPUT

Top and bottom track artworks, top and bottom silkscreens, solder resist mask, drilling detail drawing and check plot. All these may be with pad holes on/off, scale of 2:1 or 1:1, board edge on/off, 90 degrees rotation, mirror image, width of pen, x & y offsets and batch plots to disc.

The above is only a taste of the superb features of this software, surely capturing previously unknown performance from the BBC Master computer. BBC B owners will need to fit at least one block of sideways RAM, Shadow screen memory and a disc drive. A trackerball or a mouse is also required.

BBC PCB Designer is supplied on a 32K PAL PROM and comes complete with two discs and a comprehensive manual containing examples and useful information on PCB design.

By the way, as a bonus, PCB Designer is also suitable for many other schematic drawing applications such as circuit diagram drawing.

Introductory Offer: £99

(Please write in for further technical details)

SPECIAL OFFER

EPROMs for BBC's Sideways ROMs.

2764-250nS £3.00

27128-250nS (12V5) £3.25


27128-250nS (21V) £4.50

RAMs (Low power) for ATPL, WATFORD, etc., Sideways ROM Boards

6264LP (8K) £2.75

2 x 6264LP (16K) £5.30

PLINTHS FOR BBC MICRO, MASTER & PRINTERS

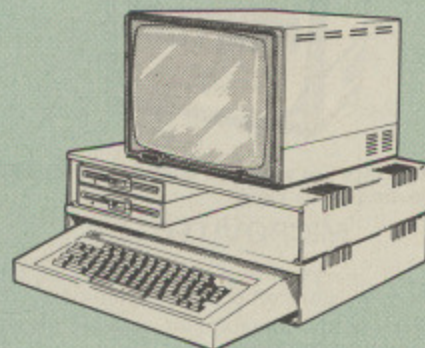


Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It

allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

SINGLE BBC PLINTH	£11 (carr. £1.50)
DOUBLE BBC PLINTH	£19 (carr. £3.00)
PRINTER PLINTH	£10 (carr. £1.50)
SINGLE MASTER PLINTH	£14 (carr. £1.50)
DOUBLE MASTER PLINTH	£24 (carr. £3.00)

COPY HOLDERS

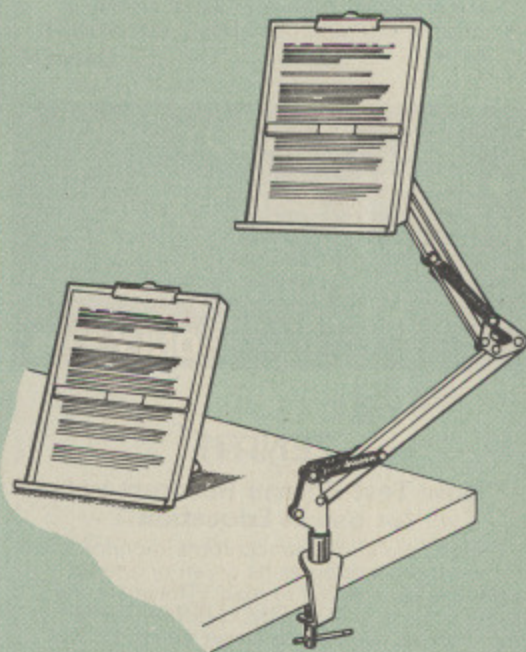

How often have you been about to type hand written notes into your computer when you find that there's nowhere to rest the paper or that your notes are resting at the wrong angle to read the type? Whether the notes be your latest program or the draft of a new trilogy, the new Manuscript Holders from Watford are superb for holding your paper at the ideal height and angle to allow you read and type in ease and comfort.

Available in 2 versions, desk resting and shelf clamping versions, these two units hold your paper firmly by means of a plastic retaining ruler and a clip grip. Both units are full A4 size.

Amazing value at only

Desk Top **£10 (carr. £2)**
Angle poise **£14 (carr. £3)**

Continued



All Monitors are supplied complete with BBC connecting leads FREE.

MICROVITEC 14"

- 1431 - Standard resolution as used on the BBC television computer programme £175
- 1451 - Medium resolution, suitable for word processing in mode 0 £225
- 1441 - High res, exceeds the capabilities of the BBC micro £359
- 1431AP RGB + PAL and AUDIO £199
- 1451AP RGB + PAL and AUDIO £255
- 2030 CS 20" Med Res £380
- 2040 CS 20" Hi Res £675
- Dust Cover for Microvitecs £5.50
- Touchtec 501 Touch Screen £239

TAXAN 12" & 14"

- TAXAN Super Vision 2 Type 620 Hi-res RGB Colour monitor. Ideal for Wordprocessing £269
- TAXAN Super 3, Type 625 Ultra Hi-res, RGB Colour) Text mode switch allows monochrome text display in Green, Amber, White reverse or White on Blue £319
- TAXAN 14" Multisync 770 Plus - An autoscanning Ultra high res, colour monitor. Ideal for Archimedes £495

- NEC JC-1401P3EE 14" Multisync Ultra Hi-res Intelligent Colour monitor. Auto scans frequencies between 15KHz to 35KHz. Text switch provides 7 colours for Database & wordprocessor. £495

- Philips BM7542 12" Paper White Attractively finished high res monitor. Has an etched glass anti-glare screen and a tilt stand for optimum viewing angle. 1000 x 850 pixels resolution coupled with high contrast makes it ideal for both word pro and graphics. The paper white display is ideal for DTP and CAD. Has a Video/Audio input. Only £65

STAR BUY

- PHILLIPS 14" Hi-Res, dark glass, attractively finished Colour Monitor - supplied complete with RGB, SKART and Audio/Phono Inputs. A push-button switch toggles between Hi-Res monochrome green text mode and full colour display.

ONLY £195

ZENITH

"Now Test Bureau Recommended for use in Education"

12" high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. (These are the same professional quality, stylishly finished monitors as used in the larger Zenith PC Sys.)

- Green (New Design) Hi-resolution £66
- Amber (New Design) Hi-resolution £70

N.B. carriage on Monitors £7 (securicor)

SPARE LEADS

- BNC Lead for Zenith or Philips £3
- Skart Monitor Lead £5
- RGB lead for TAXAN Monitors £3

SWIVEL BASES

for Video Monitors

Our professional type swivel bases have front adjustable control. This alleviates the need to lift the monitor when adjusting the viewing angle.

for 12" Monitors £9 (carr. £2.50)

for 14" Monitors £12 (carr. £2.50)

Anti-Glare VDU Screen

These extremely effective, easy to install, 12" & 14" VDU screens eliminate harmful glare, improves contrast on colour monitors, increases productivity in offices. A must for all wordprocessor users. Hundreds of these screens are in daily use in various branches of one of the leading High Street banks.

£12

Acorn-Olivetti JP101 Ink Jet Printer


One of the main problems with most printers is that they are hopelessly noisy. How often have you wanted to print something late at night but not done so for fear of waking the children? Also ideal for those working in quiet environments such as libraries, etc. Silence the complaints with the serious solution from Watford at the amazing cost of only £59 (Offer valid while present stocks last)

JP101 accepts 9½" standard fan fold paper or single A4 sheets. Tractor & Friction feed supplied as standard - print speed 50 cps.

Pack of 4 refills £12

Screen Dump ROM for JP101 £11

Panasonic KX-P1081

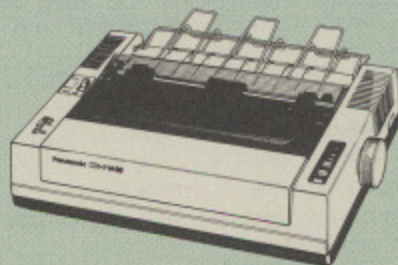

Attractively finished in BBC beige. Bi-directional, logic seeking. Has IBM and Epson RX compatible command calls. Speed: 120CPS draft mode, 24 CPS NLQ mode. Character width range from 5 cpi to 17 cpi. Upto 40 downloadable characters. Functions include, Proportional spacing, Justification, centering and left & right ranging.

(Price includes, FREE a 4ft Printer Lead, and a Dump Out 3, Screen Dump ROM worth £35 with every printer purchased from us).

Special Price: £145 (carr. £6)

Optional RS232 Interface: £39

Panasonic KX-P1082

This superb printer is very similar to the popular KX-P1081 printer but at 160 cps (40 cps in NLQ), a lot faster.

(Our LOW price also includes £35 worth of FREE BBC Cable and Dump Out 3 ROM).

Introductory Offer: £172 (carr. £7)

Panasonic KX-P3131 Daisy-Wheel Printer

This low-cost high-performance Daisy Wheel printer is ideal for anyone wishing to produce clear, immaculate letters or reports. It delivers, flawless text at 10, 12 & 15 CPS. Supports proportional spacing. Is Bi-directional. logic seeking. Printing speed: 17CPS. Has 6k printer Buffer. A printer of similar spec could cost a lot more than our ridiculously low price of:

Only £234 (carr. £7)

- Single Sheet Feeder £175
- Tractor Feed £90

FREE 32K extra Printer Buffer with every KX-P3131 purchased from us this month.

NEC P2200 PINWRITER

24 pin head; 168 CPS, LQ 56 CPS, 8K Buffer, Tractor/Friction feed. Numerous typefaces.

£285

Cut Sheet Feeder

£59

NEC P660 PINWRITER

24pin; 216 CPS, LQ 76 CPS, 8K Buffer

£425

VARIOUS PRINTERS & ACCESSORIES

- Brother HR15 RS232 Daisy Wheel £275
 - Brother HR20 Daisy Wheel £349
 - HR20 Tractor Feed Attachment £110
 - Epson EX800 Printer £395
 - Epson EX1000 Printer £539
 - Epson FX800 Printer £295
 - Epson FX1000 Printer £399
 - Epson LQ500 Printer £275
 - Epson LQ800 Printer £399
 - Epson LQ850 Printer £439
 - Epson LQ1050 Printer £529
 - Epson LQ2500+ Printer £790
 - Epson LX800 Printer £186
 - Epson SQ2500 Printer £975
 - Epson Paper Roll Holder £17
 - EX800/1000 Colour Option £55
 - EX800/1000 Colour Ribbon £18
 - EX800 Cut Sheet Feeder £130
 - EX1000 Cut Sheet Feeder £195
 - FX/LQ/LX800 Single Sheet Feeder £135
 - FX/LQ1000 Single Sheet Feeder £169
 - Hi-80 Refills - Set of 4 Pens £7
 - LX800 Cut Sheet Feeder £75
 - LQ800 Tractor Feed £44
 - LQ1000 Tractor Feed £50
 - LQ2500 Cut Sheet Feeder £195
 - LX1000 Cut Sheet Feeder £305
 - Hitachi 672 Colour Plotter £475
- (Securicor Carriage on Printers £7)

EPSON PRINTER INTERFACES

All these interfaces fit inside the printer.

- | | | | |
|----------|-----|-------------------|-----|
| RS232 | £27 | RS232 + 2K Buffer | £52 |
| IEEE 488 | £65 | RS232 + 8K Buffer | £62 |

KAGA/TAXAN PRINTERS

(IBM/Epson compatibles)

- | | |
|---------------------------------|----------------|
| Kaga KP815 Printer | £249 (carr £7) |
| Kaga KP915 Printer | £350 (carr £7) |
| RS232 Interface | £49 |
| RS232 Interface with 2K Buffer | £69 |
| RS232 Interface with 16K Buffer | £89 |

INTEGREX COLOUR JET PRINTER

- Colour Jet 132 Printer £525
- Paper Roll £6
- Screen Dump Software £10
- Colour Cartridge £14
- Black Cartridge £8
- 100 A4 OHP transparencies £55

PRINTER SHARERS


(Ideal for School environment)

- | | | |
|---------------------------|--------|------------|
| Connects | Serial | Centronics |
| 2 BBC Micros to 1 Printer | £25 | £27 |
| 3 BBC Micros to 1 Printer | £36 | £35 |
| 6 BBC Micros to 1 Printer | - | £99 |

PRINTER CHANGER

- 3 Printers to 1 Micro (Centronics) £65
- (Cables extra, specify type required when ordering)

Professional Printer Stand



This new professional printer stand takes hardly more space than your printer. Due to the positioning of the paper feed

and re-fold compartments ie. one above the other, the desk space required for your printer functions is effectively halved. Additional facilities include: Easy access to paper from both sides, used with both top and bottom feed paper and with its dial controlled paper feed system with adjustable deflector plates it ensures smooth paper flow and automatic refolding.

£26 (carr. £2.50)

THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON FX-KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English, how to use and make the most of your KP810, PW1080A or any other Epson FX80 compatible Printers like Panasonic KX-P1080/1, etc., with the BBC Micro, both from BASIC and Wordwise.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

£5.95 (No VAT)

PRINTER LEADS

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA, Panasonic etc. printers.

Standard length (4 feet long)	£6
Extra long (6 feet long)	£8
Compact's Special Centronics Lead	£9
RS232 Cable	P.O.A.
IBM Parallel 1 metre Cable	£7
Double ended 36 way Centronics Lead	£9

PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	Dust Covers
BBC Micro	-	£3.50
BBC Master	-	£4.00
Archimedes Micro pair	-	£9.00
Brother HR15/20	£3.00	£5.00
EX/LQ800	£7.50	£4.50
EX/LQ1000	£8.00	£5.00
RX/FX80/85/800/MX80	£4.00	£4.95
RX/FX100/1000	£7.00	-
Kaga/Texan KP810/815	£5.25	£4.00
LQ2500	£9.00	£5.50
LX80/86	£4.00	£4.50
LX800	£4.00	£4.75
M1009/GLP	£4.00	£3.75
Panasonic KX1080/81	£4.50	£4.75
SQ2500	£25.00	£5.50
Star NL10	£4.00	£4.50
Microvitec Metal	-	£5.50

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

Listing Paper (Perforated)

- 1,000 Sheets 9½" x 11" Fanfold Paper **£7**
- 2,000 Sheets 9½" x 11" Fanfold Paper **£12**
- 1000 Sheets 9½" x 11" NCR 2 Part Fanfold **£19**
- 1,000 Sheets 15" x 11" Fanfold Paper **£9**
- 1000 Sheets true A4 Fanfold Paper **£11**
- 2000 Sheets true A4 Fanfold Paper **£20**
- Teleprinter Roll (Econo paper) **£4**

(All our Fanfold paper is Micro perforated leaving a smooth clean edge when the tractor feed strips are detached).

Carriage 1K Sheets £2.50. 2K Sheets £3.00

PRINTER LABELS

(On continuous fanfold backing sheet)

1,000 90 x 36mm (Single Row)	£5.00
1,000 90 x 36mm (Twin Row)	£4.90
1,000 90 x 49mm (Twin Row)	£7.50
1,000 102 x 36mm (Twin Row)	£6.25

Carriage on 1,000 Labels £1.00

MEGABUFFER 256



This new Megabuffer 256 from Watford is a full featured 256K Printer Buffer. It allows the computer to print 256,000 character in a short time thus freeing the computer very quickly. In short it makes light work of printing large documents, screen dumps, etc. It is extremely simple to connect. The features are:

- Low Cost, High performance.
- Improves efficiency by making more efficient use of computer and printer.
- Compatible with any computer and printer that uses Centronics Parallel connections including all BBCs, IBM PCs, etc.
- Total compatibility with all software.
- Cheaper phone bills when using your Modems.
- Ideal for those doing large graphics screen dumps that are slow to print.
- Multi-Copy facility allows you to print several copies via Megabuffer without going through your computer.
- Data Dump facility is included.
- Built in test unit for both the buffer & your printer.

In conclusion it can safely be said that MEGABUFFER 256 is the ultimate printer Buffer for both the amateur and professional user.

Only £125 (carr £2)

OFFICE MASTER



CASHBOOK - A complete "Stand Alone" accounting software package for the cash based sole trader/partnership business. It is designed to replace your existing cashbook system and will provide you with a computerised system complete to trail balance.

FINAL ACCOUNTS - Will take data prepared by the Cashbook module and produce a complete set of accounts as following: Trial Balance with inbuilt rounding routine; Notes to the accounts; VAT Summary; Profit & Loss A/C; Balance Sheet.

MAILIST - A very versatile program. Enables you to keep records of names and addresses and then print, examine, sort and find them, all with special selection techniques.

EASILEDGER - A management aid software tool designed to run alongside an existing accounting system. Essentially a Debit/Credit ledger system which can handle sales, purchase and nominal ledger routines to provide instant management information.

INVOICES & STATEMENTS - Greatly reduces the time and cost of preparing Invoices and Statements by storing essential information like customer names, addresses and account numbers. Has VAT routines and footer messages facility.

STOCK CONTROL - Allows you to enter stock received, stock out, summary of stock items and current holdings together with details of total cost, total stock to minimum level, units in stock ordering, quantity and supplier detail.

All this for only £21 (Disc)

OFFICE MATE



- DATABASE
- BEEBCALC SPREADSHEET
- BEEBPLOT GRAPHICS


DATABASE - Set up a computerised card index system with powerful search facilities.

SPREADSHEET - Offers many calculation and editing features.

BEEBPLOT - Provides visual representation from Spreadsheet data.

OFFICE MATE Only £10 (Disc)

New Launch Offers Disc Drives DP35-800S

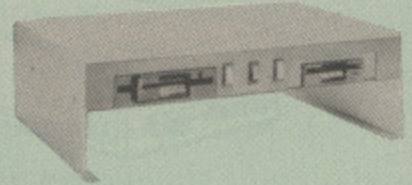

A Double disc drive - with a difference Times are changing fast for the floppy disk, and whilst the current standard for the BBC B and Master Series is the 5.25 inch disk, the standard for the future will most certainly be the smaller; faster and more reliable 3.5 inch disks - now a standard feature of both the Master Compact and the Archimedes Series.

To support the present disc drive users, and cope with the future, we have designed our own plinth-mounted disk system - called the DP35 800S, it contains both the 5.25 inch and the 3.5 inch drive formats as well as offer a firm and rigid support for a monitor on top. With the BBC Micro underneath, the plinth makes a surprisingly small footprint on the desk - leaving you more space to work with.

The 5.25 inch disk drive is 40/80 track switchable, and has its very own power supply running independently of the BBC Micro.

Watford's new plinth enables users to read, write and format disks both in DFS and ADFS format - currently the accepted standard for the Master Compact and the Archimedes, it also enables the user to read disks written for the Archimedes. Ideal for both BBC & Master.

Launch Offer: £165 (carr. £7)


OKIMATE COLOUR PRINTER

The first ribbon transfer printer in its price range which offers fully versatile colour or black printing. A 24 element print head produces more than 100 shades with exceptional clarity. Ideal for use with Quest Paint or AMX Super Art.

Only: £139

BBC Screen Dump	£10
Colour Ribbon	£6
Black Ribbon	£6

30 Megabyte Winchester Drive

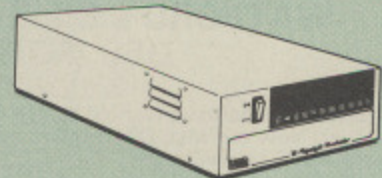

Undoubtedly the best value for money Winchester Hard disc available anywhere for the BBC Micro.

This 30 Megabyte hard disc is completely compatible with the Acorn ADFS - that's why we have bundled it with each Winchester drive, along with a full user guide and full utilities including file copy, 1000K save routines, Format and Verify - in fact all you need and more.

Finished in rugged metal and fetching BBC beige, the Winchester has an internal fan, so quiet you won't even hear it! A switched mode power supply and a neon-lit on/off switch are there along with a light on the hard disc to tell you when it is working - just compare the price with our competitors' 20 or 28 Mbyte discs!


Compatible with the Master, and the BBC B (with 17" X disc interface).

Launch Offer £425 (Carr. £12)

**Panasonic KX-P1083
Fast 240CPS (48CPS NLQ);
8K Buffer, Epson compatible, etc.
Launch Offer: £299**

NEW

DISC DRIVE SHARER

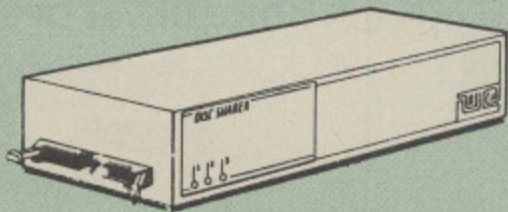

(Ideal for educational establishments)

At last, a low cost alternative to the Econet system. Watford's Intelligent Disc Drive Sharer allows you to connect 3 BBC micros (model B, B+ and Master series) to a single or double disc drive. Running under any DFS or DDFS, this intelligent unit will automatically queue the computers. Each computer has a status light dedicated to it. If it is green you will get immediate access to the disk, and red means that you are next in line. The unit plugs directly into the disc drive socket on each computer and is powered by the mains. (N.B. Not for use with ADFS.)

Launch Price: **£59**

Price includes 3 Cables

NOW WITH EXTRA FEATURES AT NO EXTRA COST – Watford's latest DFS 1.44

- Incorporates Acorn's Official Tube Host Code so that those with 2nd processors no longer need to waste a ROM socket on the DNFS.
- Option to DOUBLE the speed of BPUT and BGET.

If you already have the Watford Electronics DFS and wish to incorporate these new facilities then simply return your existing DFS ROM to us together with £5 remittance for an upgrade. Please pack the ROM securely and address the package to our Upgrades Dept.

WATFORD'S & ACORN'S SINGLE DENSITY DFS

Watford's popular and widely acclaimed DFS has now been available for five years and has gained a large following amongst serious and educational users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade. (P.S. Watford's highly sophisticated DFS is fully compatible with Acorn DFS). (not Acorn's 1770 DFS)

- Complete Disc Interface Kit including DFS ROM and fitting instructions **£78**
- Acorn's 0.90 DFS Kit complete **£79**
- DFS Manual (Comprehensive) (no VAT) **£6.95**

(P.S. Our DFS manual is the only comprehensive Manual available for the BBC micro and covers both Acorn & Watford DFSs).

- Watford's sophisticated DFS ROM only **£16**
- We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only **£12**
- DNFS ROM only **£17** ● ADFS ROM only **£25**

NEW

WATFORD'S Mk II Double Density DFS INTERFACE

Many of our customers have wanted to use our superior DDFS and Acorn ADFS together. Now our MkII DDFS board has been adapted to allow the use of Acorn ADFS as well.

Added features include:

- Acorn ADFS compatible – Use ADFS on our DDFS board.
- Tube host Code – No longer any need to have the DNFS in your machine to use Co-Processors, even the CoPro and Master 512.
- Auto 40-80 Track sensing – no need to fuss with 40/80 track switches (even works with protected disks).
- An extremely powerful 8271 emulation – ensuring compatibility with almost all software.
- New low profile – small footprint board.
- Fits with all third party ROM boards.
- Option to double the speed of file handling operations – BPUT and BGET.
- Operates in both single and double density modes.
- OSGBP has been recoded, increasing still further the speed of file handling.

Please note that not all DDFS's are capable of providing either the full 80% storage increase or of allowing a file the full size of the disk – Ours allows both of these!


If you already have a DDFS (any manufacturer), and wish to upgrade to our MkII version, then simply return your existing ROM and DDFS board and we will supply the new DDFS for only **£30.00**.

- Special introductory offer **£39.00**
- DDFS Manual (No VAT) **£6.95**
- We will exchange your existing DFS Kit for our sophisticated DDFS for only **£25.00**

Please note, as the MkII DDFS is a hardware and software upgrade, it is not possible for existing Watford DDFS users to simply exchange their ROM for the new version.

SPECIAL DISC DRIVE/DDFS OFFER


Type CLS400



- The popular Mitsubishi 400k Single Disc Drive, Double Sided, cased with Cables. Plugs directly to your Micro.
- Watford's popular DDFS Disc Interface (allows 720k storage). Will run in both Single and Double Density modes 40/80 track Software switchable.
- A comprehensive User Friendly Manual.

A Bargain at Only **£130** (£6 carr)
(Offer valid while stocks last)

3 1/2" DISC DRIVE OFFER



These top quality 3 1/2" Double sided, 80 track, 1 Megabyte (unformatted each Disc Drives), are attractively finished in BBC beige. They are supplied complete with all cables and a Utilities Disc. They run directly from the BBC B/Master's own PSU.

- Single 400K Drive **£69**
- Twin 800K Drives **£126**

Mysteries of Disc Drives & DFS Revealed

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

Then The Mysteries of Disc Drives and DFS Revealed is the book for you. It explains in detail the different types of systems available, how they are installed and how to use them. Many examples are given including pre-written programs to call various functions of the DFS available only through Operating System calls. Different types of disc, 40/80 tracks etc. are all explained. This book is ideal for the beginner confused by the plethora of choice available in the marketplace.

£5.95 (Book No VAT)

DISC ALBUMS

Attractively finished in antique brown leather look vinyl. Stores upto 20 Discs. Each disc can be seen through the clear view pocket.

£4

FLOPPY HEAD CLEANER KIT

The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to use. Available in 3 1/2" & 5 1/4", please specify.



£6

ANTISTATIC LOCKABLE DISC STORAGE UNITS

Gives double protection – Strong plastic case that affords real protection to your discs. Antistatic helps avoid data corruption whilst in storage. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.

- M35 – holds upto 50 5 1/4" discs **£6.00**
- M85 – holds upto 95 5 1/4" discs **£8.00**
- M25* – holds upto 25 3 1/2" Discs **£5.50**
- M50 – holds 50 3 1/2" Discs **£7.50**

* Not lockable



PLASTIC LIBRARY CASES

Holds up to 10 5 1/4" Discs. **Only £2.00**

DISC PLONKER RACK

When using ones micro, there is a tendency to have more than one Disc on the desk. This exposes them to the hazards of fingerprints, scratches, dust, coffee and an untidy desk.

Why not protect your valuable data from all these hazards with the help of our extremely handy and low cost DISC PLONKER RACK. It holds up to eight 5 1/4" Discs.

Protection at Only: **£2**



DUST COVERS (For our Disc Drives)

- Single CLS (without PSU) **£3.20** Twin CLD (without PSU) **£3.85**
- Single CS (with PSU) **£3.95** Twin CD (with PSU) **£3.90**

Quality Disc Drives from Watford

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates capacity in single density mode. That within the brackets is the capacity in double density mode. All disc drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track (non-tinted) and which are 80 track (tinted). All our 80 track drives are already fitted with a 40-80 select switch.


All our Disc Drives are Double Sided and will operate in both Single and Double Density modes. Extensive experience of the usage of disc drives suggests that the JAPANESE drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.

Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packages" label other manufacturers drives with their own name). We buy the high quality JVC and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate (extensive tests within our workshops have confirmed this). All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. Ideal for Schools & Colleges. We are now able to supply all single disc drives with Power Supply, in either single or dual case. (Dual case has a twin data cable and a power supply capable of driving two disc drives) allows easy expansion to a dual drive unit, at a later date. Prices stated in the pricing boxes below are for single drives in standard single cases. Single drives in a dual case cost an extra £5. (At Watford we anticipate your needs of tomorrow, not just today!)

When using a BBC Micro, most people find themselves short of desk space. The Watford's BBC Micro plinths form an ideal way of recovering some of this precious space) your BBC, Disc Drive and Monitor can all occupy the same vertical footprint and still be comfortably situated. With the Watford Double plinth, your Disc Drive is mounted vertically at one side, leaving a very valuable area directly in front of you for such useful items as spare discs, pen, paper, reference manuals, etc. Follow the trend with Watford plinth. (Turn to the 6th page of our advert for the Plinths). P.S. All our 5 1/4" Disc Drives with PSU are compatible with the Compact Micro. All you require is the special Compact Disc Drive Cables designed by us.

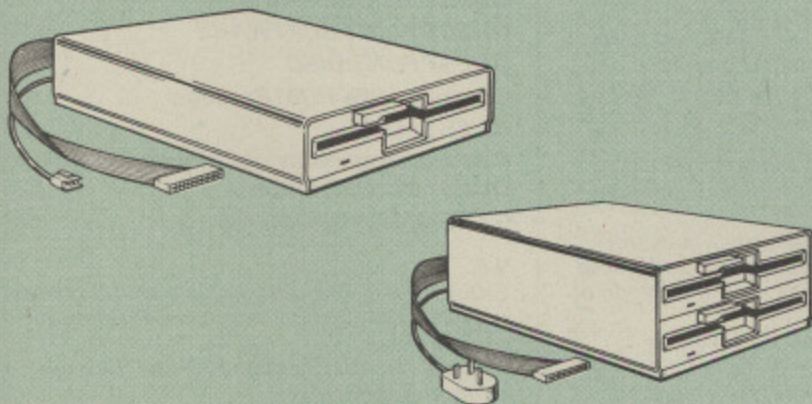

Capacity	Drives without P.S.U.		Drives with P.S.U.	
	Single	Twin	Single	Twin
200K (360K)	CLS 200 £89		CS 200 £98	
400K (720K)	CLS400S £89	CLD 400 £168	CS 400S £99	CD400 £188
800K (1.44M)		CLD 800S £169		CD 800S £188

● TWIN Disc Drive Case, complete with Power Supply & Cables £43
Securicor carriage on Disc Drives £5 to £6

Prefix C = Cased Drive
L = Less PSU
S = Single
D = Double

Suffix S = 40-80 Switchable

e.g. CLS400S - Cased Disc Drive, Less power supply unit, single 5 1/4" 400K, (720K in double density); Double sided; 40/80 track switchable.

Cable to connect 5 1/4" Disc Drives to BBC Compact
Single £9 Twin £12
Special Cable to connect both 3 1/2" and 5 1/4" Disc
Drives
simultaneously to the BBC Compact £13

3M - DISKETTES

3M - SCOTCH Diskettes with Lifetime warranty from Watford Electronics your 3M Appointed Distributor.

- 10 x 5 1/4" S/S D/D 40 Track Diskettes (744) £8.00
- 10 x 5 1/4" D/S D/D 40 Track Diskettes (745) £9.75
- 10 x 5 1/4" S/S D/D 80 Track Diskettes (746) £12.50
- 10 x 5 1/4" D/S D/D 80 Track Diskettes (747) £12.75
- 10 x 5 1/4" 1.6M D/S D/D High Density Discs for IBM XT and AT £28
- 10 x 3 1/2" S/S D/D 40/80 track Discs £13.50
- 10 x 3 1/2" D/S D/D 40/80 track Discs £15
- 10 x 3 1/2" High Density Diskettes £43



FREE

This extremely useful and attractive Personal Leather Organiser worth upto £50 is yours when you buy from us, 5 Boxes of any of the 3M range of Discs that we advertise above.

TOP QUALITY 3 1/2" & 5 1/4" DISKETTES

To complement the range of quality discs and disc drives that WE already sell, WE are now supplying some special offer packs of 10 high quality discs. Each Disc has a reinforced hub ring and carries a lifetime guarantee. These are supplied complete with selfstick labels and packaged in an attractive plastic library disc box. We strongly recommend these Discs.

- 10 x M3 3 1/2" D/S D/D 80 Track Discs £15
- 10 x M4 5 1/4" S/S D/D 40 Track Discs £6.50
- 10 x M5 5 1/4" D/S D/D 40 Track Discs £8
- 10 x M7 5 1/4" D/S D/D 80 Track Discs £9
- 3" Double Sided Discs £3 each

Special BULK OFFER on 5 1/4" DISCS

(Supplied packed in Anti-Static Lockable Storage Units)
(Lifetime warranty on Discs)



BULK PACK DISCS in lots of 100

Type	S-S 40T	D-S 40T	D-S 80T
● Without Sleeves	£35	£39	£45
● With Sleeves	£38	£42	£48



WATFORD'S WINCHESTER DRIVES

- 10 Megabyte Unit with ADFS £375
- 30 Megabyte Unit with ADFS £449

(Supplied complete with utilities software)

CDP800S



CDPM800S

Twin 800K Double sided 40-80 track switchable disc drives mounted in an attractively finished Beige colour plinth for the BBC Micro. Supplied complete with integral power supply, cables and Utilities disc. The switches are mounted on the front panel for ease of use.

CDP 800S for BBC Micro £192
CDPM 800S for Master £196

(Securicor
Carr. £7)


(The above drive units are 2 Megabytes unformatted)

ACORN'S Twin 800K Disc Drives

Specially mounted side by side in a Master Plinth. Supplied complete with Cables. Plugs directly to the Master Computer.

RRP £350

Our Price: Only £175
(carr £7)

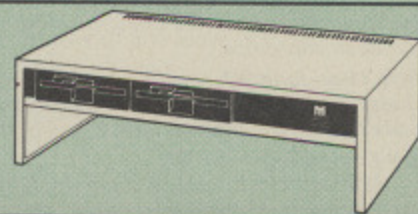

Continued →

NOMINATED
FOR

1987

QUEST MOUSE



QUEST MOUSE

The ultimate in Mouse technology, the Watford Electronics Quest Mouse must be the most powerful Mouse package yet produced for the BBC Micro. Featuring state of the art 32K ROM software the Quest Mouse package is filled with features essential to the budding artist. The Quest Mouse is a high precision, low profile and large footprint mouse. It has three large comfortable buttons and its RUBBER COATED STEEL BALL is smooth and easy to use on virtually any work surface. This also eliminates any directional bias that one encounters on the most well-known mouse for the BBC. The Quest Mouse is FULLY HARDWARE COMPATIBLE with the AMX MOUSE so that it will work with any of the AMX range of software.

The two parts of the Quest package are available separately so that existing Mouse owners can upgrade to the Watford's sophisticated Quest Paint software or replace their existing worn out mice for a minimum cost.

QUEST PAINT

The Quest Mouse software is supplied on a PALPROM unit to allow the sophisticated 32K program to be used from a single ROM socket. It is compatible with the BBC B, BBC B Plus and BBC Master Series machines.

The software is used to draw high resolution Mode 1 pictures in full colour. All menu selection and control of the drawing process is performed with the mouse so that you will hardly ever touch the keyboard.

SOFTWARE FEATURES

The software is far too powerful for us to describe it fully in such a small space. Below is a list of the various features. Please write to us for a fully descriptive leaflet.

Disk interface not required. Utilities disk has facility to create and print big screens. Colours applied can be solid, either pattern of user defined pattern. Drawing can use brush or airbrush. Brush shapes can be defined and stored. Airbrush sprays colour/pattern randomly with four jet sizes and even or center spread. Colour cycles. Colour protection to stop particular colours from being overwritten by selected drawing actions. All standard drawing facilities like: rubber, straight pencil lines, triangles, circles, ellipses, rectangles, parallelograms, polygons, etc are provided. All shapes can be solid or just a boundary line. Once a shape has been set up it can be repeated anywhere on the screen. Global colour replace in a rectangle. Powerful fill facility for areas and vertical/horizontal lines. Full cut and paste of rectangular areas with rotation and size with screens from Watford Beeb Video digitiser. Load and Save screens with colour pallet information, save brush and pattern definitions etc.

Take The Guesswork Out of Selecting a Mouse Package

With reviews like this how can you go wrong.

Popular Computing Weekly, 9-11 June '87

"What you actually get for your money is a well built, three button mouse (far superior to the AMX mouse)."

"Overall the combination of a quality mouse and decent art package gives Watford Electronics a real chance of supplanting AMX as mouse supremos."

Micro User June '87

"Quest Mouse and Quest Paint can hold their heads high in the market. . ."

A&B Computing June '87

"... Watford Electronics, a company famed for excellent hardware add ons and versatile software packages. Called Quest mouse, "this is a very special mouse driven drawing package..."

"... you will have one of the most comfortable and professionally built mice I have used in a long time. The buttons are responsive, the mouse movement is smooth and without directional bias - a pleasure to use."

"What we have here is probably the best art package there is for the BBC Micro. . ."

"Quest Paint is a major leap forward in BBC programming. . ."

"Quest Paint is an original piece of programming, it is friendly and well endowed with many useful facilities. I would comfortably say it is easier to draw good pictures with Quest Paint than it is with more expensive 'Professional' art packages for the Atari ST and the Commodore Amiga. A recommended buy if you are looking for the best in BBC micro based art packages".

Acorn User, September '87

"The mouse (Quest) performs well in the face of competition from AMX, Wigmore and the rest. . ."

"... this package represents excellent value for money. If you are interested in art then this program is for you to buy".

"Given time, I can see no reason why Quest Paint shouldn't take on the title of the definitive art package available for the BBC Micro to date".

"All in all, Quest Paint is a very professional package. It contains virtually every feature the budding artist could require".

"What makes Quest Paint so versatile is the addition of a sub-menu which allows you extensive control over each function".

"Until recently, Superart from AMS had been judged as the definitive mode 1 graphics package for the BBC micro. But now it has a serious rival in the form of Quest Paint, from Watford".

"As a measure of what is contained within Quest Paint, I would say it had all the features of Superart plus. . ."

"In most art packages, provision is given for drawing triangles and rectangles. Quest Mouse goes 14 better, allowing any regular polygon of upto 16 sides".

"One facility, not found on any other Art package to my knowledge, is the ability to access a digitiser from within the program". The reviewer concludes by saying, "The result is an extremely comprehensive and professional art package".

John Kilby, Head of Computer Science, Bishop Wulstan High School, Rugby, writes:

"Quest has been an excellent piece of equipment. The problem that seems to occur everyday is that at lunchtime the pupils rush to the computer room to make sure that they are first in the queue for the 'Quest' mouse".

Lt. Cln. C.G. Holton, G2 HQ 1 (BR) Corps, BFPO 39, writes:

"As ever your service is superb and the Quest Mouse proves every bit as good as the adverts claim".

Beeblet User Group, New Zealand Oct '87:

"One of its nicer features is that the top menu is done in Mode 0, the drawing itself is in Mode 1. Thus on screen together are two different Modes. A neat way around an old problem".

"PAN is used when a larger than one screen size image is required. The mind boggles at an A3 size drawing".

"I like it partly because of the mouse itself which is smooth and easy to handle but mainly I suppose because of the features I longed for and previously never got. Its easy to use with almost everything at your fingertips from the mouse. The software is simple where needed and complex where complexity is required".

ConQuest

Watford's Quest package is an extremely powerful and flexible drawing package, with very wide and unusual features. However, since its launch various suggestions for even more advanced & powerful facilities were received from the Quest users. ConQuest allows you these more advanced facilities, like, distortion of a cutout to any shape and a full font designer. If you also have a GXR ROM in your machine or you are using a BBC Master then ConQuest will take advantage of this to give ellipses at any angle, sectors and arcs, etc. Quest combined with ConQuest and Acornsoft GXR ROM make up THE MOST POWERFUL drawing packages available for the BBC range. Quest Paint is able to take advantage of almost any additions to your machine, such as Shadow or Sideways RAM. ConQuest takes this principal even further, by utilising the otherwise normally incompatible Sideways RAM facility by holding pictures in them.

Some of the features are:

- Pick filenames off the screen for loading and saving.
- Rotate a cutout to any angle and Distort it to any four sided shape.
- Has Built in Font editor.
- Default brushes and patterns on startup.
- 16 x 16 font available on start up.
- Ability to reset patterns, fonts and brushes to default at any time.
- ROM based enhanced Epson and compatible printer dump.
- ROM based enhanced extended picture routine.
- Ability to create and abort extended pictures.
- Improved disk access speed for extended pictures.
- User definable sideways RAM driver for incompatible sideways RAM systems.
- Ellipses at any angle on Master 128 (or B with GXR ROM).

QUEST MOUSE & QUEST PAINT	£59
QUEST MOUSE, QUEST PAINT, AMX PAGERMAKER & PAGEFONT	£85
QUEST MOUSE ONLY	£29
QUEST PAINT SOFTWARE	£32
QUEST FONT DISC	£12
ConQuest 32K ROM Package	£29
QUEST MAT	£3
Part-exchange your old Mouse for a New QUEST MOUSE for only	£23
GXR ROM for BBC Micro	£22

N.B.

1. Quest Paint supplied complete with Software in a 32K ROM, Comprehensive User Guide and a Utility Disc.

2. Quest Font Disc has 22 text FONTS for use within Quest Mouse.

MARK II LIGHT PEN

Our Mark II Light Pen is the very latest in light pen technology. It is totally insensitive to local lighting conditions and works with many different monitors. The pen only responds to the High Frequency light produced by your monitor/TV. An LED indicates when valid video data is being produced. A conveniently located switch is also fitted.

Price Only £21

(Price includes FREE software Disc and Operating Manual)


RB2 Marconi Tracker Ball

RB2 (AMX/Quest compatible)	£59
RB2 including Quest Paint	£85

FLEET STREET EDITOR

Software pack for BBC Micro	£33
Software pack for the Master	£39
Software Pack for Compact	£40
Admin Xtra Disc Utility	£13
Walt Disney Disc Utility	£13
Fonts N Graphics Disc Utility	£13

THE NEW Mk III AMX MOUSE



ONLY: £59 Inc. Super Art package
(carr £1.50)
(Please specify for BBC, Master or Compact)

FREE our popular Colour Art software pack worth £15 with every AMX Mouse package purchased from us.


AMX MAT	£3
AMX MOUSE ONLY	£29
AMX DESK Package	£19
AMX UTILITY Package	£11
AMX SUPERART Package	£39
AMX STOP PRESS – A Desktop publishing software. Works with Keyboard, Joystick or a mouse	£32

We are giving away absolutely FREE, our PAGE-FONT disc with every purchase of STOP PRESS from us.

PAGE-FONTS – Over 20 Fonts for use with AMX Pagemaker **£9.50**

AMX DESIGN (ROM)	£59
AMX 3D ZICON Disc	£19
AMX Database Disc	£19
AMX XAM Educational	£15
AMX EXTRA EXTRA	£19
AMX MAX A gem of desktop (ROM)	£15

DIAGNOSTICS DISC

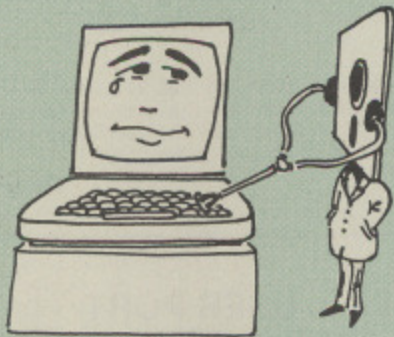

The BBC Micro is a very complex machine and thus diagnosing a fault can be very difficult. At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.

The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb:

RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Only £20.00

NEW

The WAPPING EDITOR

Watford Electronics bring professional quality Desktop Publishing to the Beeb. The Wapping Editor is a totally self contained mouse-driven desktop publishing package designed to run on the BBC B, B+ and Master computers. The massive 64K ROM contains ALL the software you need to do your own publishing. It 'Brings the Freedom of Press' to your fingertip. The software has a word processor, a graphics package, a page layout section and a font designer. Although very sophisticated, Wapping Editor is simplicity itself to use. Anyone already familiar with Quest Paint will immediately feel at home.

GRAPHICS PACKAGE

Imagine Quest Paint re-written to take advantage of the high resolution of Mode 0, well this is it. The Wapping Editor could well be worth buying for this section alone. This must surely be the ultimate in mouse-driven Mode 0 graphics.

WORD PROCESSOR

This section is a fully functional word processor specially tailored to suit the Desktop Publishing environment. Gone are all the unnecessary and cumbersome text formatting commands – these are dealt with in the 'Page-Layout' section. The features of this word processor include wordwrap, wordcount, insert/overwrite, move block, copy block, delete block, search and replace, browse, etc, many of these features being mouse controlled. Text input can of course be taken from existing word processor files like Wordwise, View, etc, but it is not necessary to have a separate word processor in order to use this package.

PAGE-LAYOUT SECTION

Page Layout becomes easy using these mouse-driven routines. The user simply 'pulls' a rectangle onto the page and states which text document or graphic is required to fill the space – it's as simple as that! Text can be automatically printed in a pre-set number of columns, left justified and/or right justified, or centered. Several different typefaces can be held in memory at one time. Graphics may be stretched, squashed or cropped to fit any size rectangle. Graphics input can be from the software provided in the package or, using the 'mode convert', from any graphics mode screen.


THE FONT EDITOR

This is an enhanced version of the font editor contained in the Con-Quest ROM and allows the editing of ALL 95 characters. As well as being able to design your own typefaces, fonts from other DTP packages or from Quest Paint may be loaded into the editor and converted for use with the Wapping Editor. This sophisticated editor has numerous functions including slide, flip, invert and rotate individual characters or the whole font. Individual characters can be mirrored or copied and a mask feature allows you to superimpose two characters. Lines and columns can be inserted or deleted allowing the character to be stretched or squashed. This font editor will also allow 'font' and 'brush' files to be designed for use with Quest Paint.

This package is the latest in the line of integrated professional quality mouse-driven software from Watford Electronics, the company that adds Power to Beeb.

P.S. For details on Quest Paint and ConQuest, please refer to Page 7 of our advert.

BEEB VIDEO DIGITISER

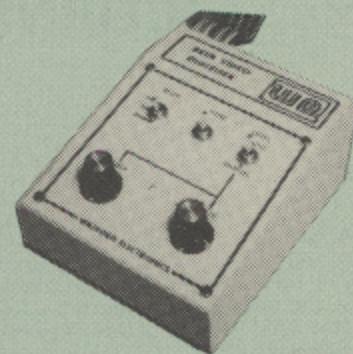

Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC Micro.

This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Full controlling software is supplied on a normal sideways ROM and this is easily accessed via additional * commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROMs to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

£109 (Carr. £3)

(Price includes) Digitiser Unit, Software in ROM & a Comprehensive Manual
(BBC B+ and Master compatible, except Master with Econet)

Magazine Maker

(As seen on TV)

A combination of the Pagemaker and Watford's Beeb Video Digitiser.

Using any video that provides a composite signal and the digitiser, images from a camera or TV can be converted into a graphics screen on the BBC Micro.

They can then be used within Pagemaker to illustrate magazines or newsletters – in fact anything that needs to be created on A4 size paper.

With Pagemaker's many features, a variety of pictures can be composed – the only limit being the imagination.

Pictures can be doctored using Pagemaker's graphics option to produce any number of effects.

Text can be formatted around the digitised photo on screen using the facilities available, which include 16 typefaces, character and pattern definer, text formatting and the ability to load in wordwise and viewfiles plus much more.

Once created the picture can be printed out. The Magazine Maker is suitable for any use that requires illustrated documents.

Complete Package £135.00 (carr. £3)

Continued →



ARIES CORNER

The Aries B-32 Shadow RAM Card

Like the BBC B+, the B32 provides 20k of shadow screen RAM and 12k of sideways RAM. Unlike the B+, the B32 has simple software commands which allow the user to reconfigure the RAM as 16k of shadow RAM and 16k of sideways RAM, or all 32k as sideways RAM.

With the B32, the programmer gets up to 28k of RAM available for Basic, Logo, Comal, Forth, Lisp and BCPL programs in any screen mode. The business user gets extra memory for View, ViewSheet, Wordwise Plus, Interword and many other applications. For advanced applications, the scientific user gets access to a massive 47k of data storage using the Acorn approved *FX call.

Sideways RAM enables you to load sideways ROM images from disc, allowing you to have a large library of sideways ROMs (subject to the copyright holder's permission) stored on disc. The B32's sideways RAM can also be used to extend any operating system buffer (such as the printer buffer) or to load tape programs into a disc system.

The B32 simply plugs into the 6502 processor socket on your BBC micro - no flying leads to connect and no soldering. Provision of the on-board ROM socket means that the Aries-B32 control ROM does not use up one of your existing ROM sockets.

● Recommended by Computer Concepts for use with their Inter series of ROMs.

Price: **£80** (carr. £2)



**CREDIT CARD 24 HOUR
Ansaphone Hot Lines
(0923) 50234 or 33383**

Aries B-12 Sideways ROM Board

This board is extremely well made, simple to install, reliable when fully loaded and compatible with the Aries-B20 and the Aries-B32

The B12 provides a total of twelve sideways ROM sockets (the four in the original machine are replaced by the twelve on the board), all fully accessible by the MOS sideways ROM system. In addition, there are two sockets for sideways RAM, giving up to 16k of RAM using 6264 static RAM chips.

The B12 system consists of two parts: a large detachable "mother board" which carries the extension ROM sockets and a small "base board" on a short ribbon cable, which plugs into the existing sideways ROM sockets. This two-board design eliminates the reliability problems previously associated with some other ribbon-cable based systems.

If you do not have a B32 or B20, a small adaptor module (the Aries-B12C) is available at a nominal cost.

Price: Aries B-12 **£40**
Aries B-12C **£5**


ARIES B-488 IEEE-488 INTERFACE UNIT

The Aries-B488 is an interface unit to enable the BBC micro to control and monitor IEEE-488 bus systems. The IEEE-488 bus (also known as the 'GPIB' or 'HP-IB') is the standard method of interconnecting programmable laboratory instruments and control equipment. Using the B488, up to 15 devices may be connected in a single high-speed data network.

£238 (Carr £3)

All prices in this advert are
exclusive of VAT.

SIDWAYS ZIF SOCKET

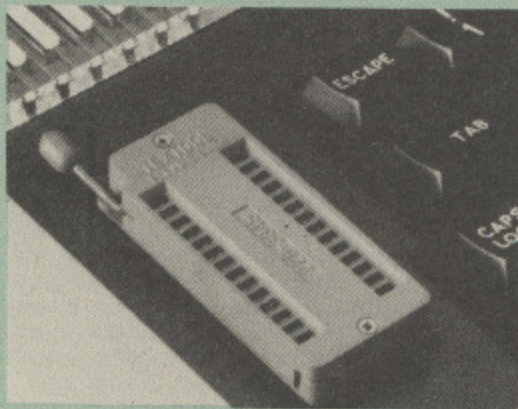

Allows you to change your ROMs quickly and efficiently, without opening the lid. The ZERO INSERTION FORCE (ZIF) socket is located into the ROM Cartridge's position.

● Very simple to install. NO SOLDERING required. The ZIF (Zero Insertion Force) eliminates the possibility of damage to your ROM pins when inserting & extracting.

● The low profile of the socket allows unrestricted access to the Keyboard.

● All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.

● This versatile hardware solves the problem of running out of socket space. Simply lift the ROM from the ZIF & insert a different one (No pulling or pushing of Cartridges. It is a must for all professionals and Hobbyists alike.)

● BBC, B+ and Master compatible.
ONLY £15 (carr £2)

Low Profile CARTRIDGE SYSTEM

Complete System consists of: Low profile ROM Cartridge, Socket housing, Cable assembly, 5 labels and a library storage rack for the BBC B.

● Complete System **£11**
● Spare Cartridges **£2.50**
● Spare Rack **£1.50**

**ROM Cartridges
for the BBC Master**
Twin **£7.50**; Quad **£12**

16K Sideways RAM Modules

Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector. Key points to note about this new addition to the Watford range of products are:


- Write protection (useful in a variety of circumstances).
- Read protection (allows recovery from ROM crashes).
- Compact construction.
- May be fitted in systems even with a ROM board.
- Multiple units may be fitted, even with a ROM board.
- No overheating or overloading problems.
- Free utilities disc supplied.
- Can be used as a 16K PRINTER BUFFER.
- Ideal for professional software development.
- Supplied with utilities software disc.

Only: **£24** (carr £2)

Optional extras

READ and WRITE protect Switches **£2** each
Battery for Battery Backup **£3**

SOLDERLESS SIDWAYS ROM SOCKET BOARD

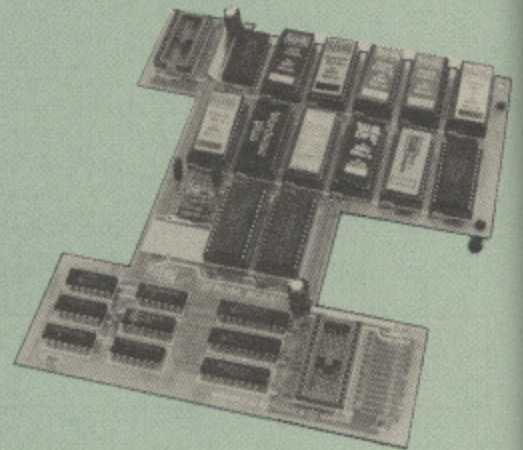

In the May 1986 Micro User's independent review, the writer concludes, "The board has been well laid out. Its position is much better than others - not over the HOT RAM chips and further away from the disc controller area". "I give the solderless ROM board the thumbs up and wish it success".

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16.

Unlike our competitors inferior boards, the ONLY upgrade required for fitting battery backup to the Watford Solderless ROM board (all Watford ROM boards, actually) is the fitting of the battery itself. (No other expensive components are required.)


- The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows:
- Increase your BBCs capacity for ROMs from 4 to 16.
- No soldering required.
- Very low power consumption.
- Minimal space required.
- Compatible with Torch, DDFS, RAM Card, 2nd Processor, etc.
- Socket 14 takes two 6264 RAM chips.
- Read protect to make RAM "Vanish" allows recovery from ROM crashes.
- Battery backup option for RAM chips.
- Supplied ready to fit with comprehensive instructions.

Price: **Only £32**
Battery backup fitted **£36**
(carriage £2)

● Sideways RAM Utilities Disc for Solderless ROM Board. Includes the options to load and save ROM Images and the facility to use Sideways RAM as Printer Buffer.

Only: **£8**


USER PORT SPLITTER UNIT

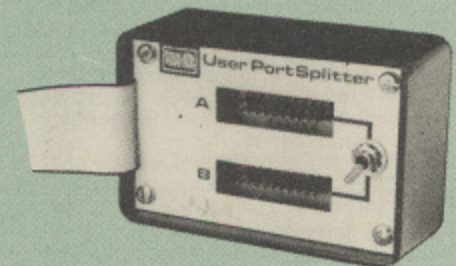

Gone are the days when you had to plug and unplug devices from the User Port. This extremely useful little device allows two units to be connected to the User Port simultaneously, and select between them simply by toggling a switch. This device is particularly useful for those people using Quest Mouse and the Watford Video Digitiser or any similar combination.

Excellent Value at **£21** (carr £2)

ROM/RAM CARD

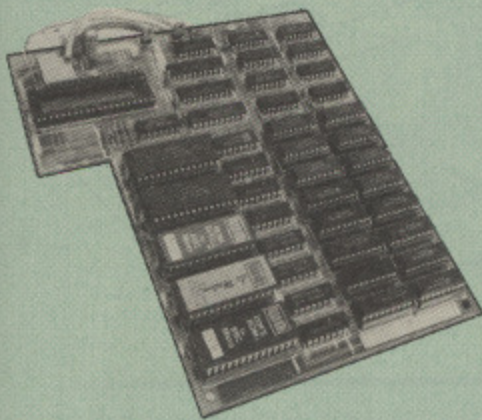

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems.
- No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers, etc.)
- Fully buffered for peace of mind.
- Firm mounting in BBC micro.
- Compatible with all BBC micros (not BBC+ or Master).
- Total number of ROMs increased from 4 to 8.
- Up to 8 banks of sideways RAM (dynamic).
- Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
- Software Write protect for ALL RAM.
- Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
- Separate RAM write register (&FF30 to &FF3F).
- Automatic write to currently selected RAM socket for convenience.
- Accepts any ROM.
- FREE utilities disc packed with software.
- Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.
- Large printer buffer.
- UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).
- ROM to RAM load and save facilities.

The SFS (Silicon Filing System) can utilise up to the full 128k of RAM (with the SFS in any paged RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD &7F for ROM-SPELL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM-RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM-RAM Board.

The ROM-RAM Board is supplied with all ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the options, for later.

Please write in for further details.

INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM£39
 - ROM/RAM card with 64k dynamic RAM£52
 - ROM/RAM card with a massive 128k dynamic RAM£80
- (carriage on ROM-RAM Card £3)

OPTIONAL EXTRAS:

- 16k plug-in Static RAM kit.....£6
- 16k Dynamic RAM for Upgrade.....£7.50
- Battery backup.....£3
- Read and Write protect switches.....£2 each
- Complete ROM-RAM board
- All options installed£89

P.S.

Is your existing ROM Board overflowing with ROMs? Do you need more Sideways RAM? Is your Board unreliable? Then upgrade to Watford ROM/RAM Board and pay £5 less

Le Modem



The MODEM from Watford

At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multi-standard, i.e. 300/300, 1200/75 & 75/1200 UK and BELL (USA) are all supported.

The features that make Le MODEM such good value are:

- A complete communications terminal that transforms your BBC Micro into a very powerful World-wide data transfer system.
- Auto Dials, Auto answers, and is completely controlled by your micro. There are no external controls!
- Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.
- Designed to be SIMPLE but SOPHISTICATED. To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the rest.
- Supplied with a comprehensive telecomms package in a 16K sideways ROM which includes a FULL PRESTEL terminal allowing TELE-SOFTWARE to be downloaded.
- A comprehensive 80 column terminal. This includes XMODEM error checked transfer protocol, to allow error free data transfer anywhere in the world!
- FULLY controlled by simple *COMMANDS allowing you to control it from your own BASIC programs. To get you started we supply a FREE disc of bundled software!
- Connects to the 1MHz bus. A *AUDIO ON-OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
- Completely self contained with internal mains power supply. (Even a free mains plug is fitted!) A *TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
- Packaged in such a way that you need nothing else except a BBC Micro to communicate with computers all over the world.
- FREE Registration to MicroLink.

SPECIAL OFFER

Price: **£88**
(carr £3)




(Price includes, Le Modem, Software ROM, Cables & Comprehensive Manual)
(Write in for further details)

Minerva Systems Software

- System Delta with Card Index£55
- System Programmers Ref. Guide£19
- System Gamma£43
- System Gamma Prog, Ref, Guide£19
- System Mailshot£17
- System Reporter£17
- System Intrnr/View Link£17
- System Sales Ledger£39
- System Purchase Ledger£39
- System Nominal Ledger£48
- System Stock Management£39
- Order Processing/Invoicing£39

APOLLO



The NEW Modem from Watford

Following numerous requests from you, our discerning customers for an APPROVED, Low Cost & High Performance modem with Auto Dial & Auto Answer facilities as standard) we bring you the versatile APOLLO Modem. Just compare the features and look at the price (which incidentally includes the cost of the Software, manual and BBC connecting cable). We are sure you will agree that Watford Electronics in their traditional way are giving you a super 'value for money' deal.

Just look at these features:

- V21 for Bulletin boards, Microlink, Telecom Gold, etc.
- V23 for Prestel, Home Banking, and other Viewdata services.
- Reverse V23 allows User run Viewdata service.
- 1200-1200 half duplex for communications.
- XMODEM, HEX and ASCII file transmission.
- Auto Dial of given 'phone number.
- Auto Answer for User's Bulletin Board.
- 80 column terminal with split screen facility.
- Prestel text screen dump.
- Fully BAPT approved.
- FREE Registration to MicroLink.
- £6.50 off annual Membership to Micronet, Prestel and Telecom Gold.

The Apollo is attractively finished in matt black. It opens the doors to world communication to both, the Hobbyist and the Professionals alike. With baud rates varying from 300/300 Originate and Answer, 1200/75 and 75/1200 full duplex and 1200/1200 half duplex, virtually all the popular tele-services can be accessed. A comprehensive Comms ROM oversees the use of the APOLLO, providing simple commands for all the software controlled facilities. APOLLO is an ideal modem for both the first time buyer and the seasoned user. Join the Telecommunications Revolution - Buy a Watford APOLLO!

Only: **£88** (Carr £3)

Price includes, the Modem, Comm Software Cables & Operating Manual).
(Write in for full specification)

VOLTMACE JOYSTICKS

- Delta 3B Single Joystick£12
- Delta 3B Twin Joysticks£17
- Delta 3C Joystick for Compact£10
- Delta 14B Single Joystick£12
- Delta 14B/1 Adaptor Module£12
- Transfer Software Disc-Tape£7

ATTACHE CARRYING CASE

For the BBC Micro. Attractively finished in antique brown leatherette. Lockable.
Only **£10** (£2 carr.)

Versatile BEEB SPEECH SYNTHESISER Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form virtually any word imaginable.

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive manual.

SPECIAL PRICE £32 (carr £2)

Continued

COMPUTER CONCEPT'S ROMS

ACCELERATOR	£48
CARETAKER Basic Utility	£25
DISC DOCTOR	£28
Graphics ROM	£29
TERMI	£25
COMMUNICATOR	£49
SPEECH ROM	£24
Printmaster	£28

Wordwise

£24

Wordwise plus

£40

We are giving away absolutely **FREE**, the superb Word-Aid ROM worth £24, with every WORDWISE PLUS package bought from us.

Word-Aid

The most comprehensive utilities ROM for Wordwise-Plus

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option. This ROM has been personally approved by Mr Charles Moir, the author of WORDWISE PLUS.

- Alphabetical sorting of names and addresses.
- Text transfer options.
- Chapter marker.
- Epson printer codes function key option.
- Search and display in preview mode.
- Embedded command removal.
- Print Multiple copies of a document.
- Multiple file options for print and preview.
- Address finder.
- Label printer.
- Mail-merger.
- Number/delete/renumber.
- Clear text-segment area.
- BBC B, B+ and Master compatible.

Only £24

(N.B. Word Aid requires a Disc Interface in your Micro)

HI-WORDWISE-PLUS DISC: £5

SPELL MASTER £42

Inter SHEET ONLY £37

INTER-CHART

ONLY: £26

Inter-WORD £38

MEGA-3 ROM

Interword, Intersheet & Interchart - 3 in one ROM

£82

INTERBASE £49

All Prices Exclusive of VAT

VIEW

VIEW WORDPROCESSOR 2.1 £35

VIEW 3.0 ROM £48

VIEW PROFESSIONAL £79

HI-VIEW £36
(for use with 6502 2nd Processor)

VIEW Printer Driver Generator £9
(Please specify Disc or Cassette)

VIEW SHEET (Acornsoft) £37

VIEWSTORE £39

VIEWSPELL with 80 track disc £29

VIEWPLOT Disc £22
(Please specify for Master 128 or Compact)

VIEW-INDEX £12

OVERVIEW Packs 1 & 2 for the Master £72

Watford's own Sophisticated VIEW PRINTER DRIVERS

Epson FX80 & Kaga KP (Disc) £8
Juki & Brother HR15 (Disc) £8
Silver Reed Printers (Disc) £8

ADVANCE COMPUTER PRODUCTS' ROMs

Adv. Disc Toolkit £29
Adv 1770 DFS for Mast/Compact £29
Adv 1770 DFS for BBC/BBC+ £29
Adv Disc Investigator £24
Adv. Control Panel £29

MINI OFFICE II

DISC Version for BBC B & B+ £14.50
DISC Version for BBC Master £17.50
ROM Version £47.00

(When ordering please specify for which Micro & 40 or 80 track Disc).


REPLICA 3

This new improved REPLICA 3 from Clares is a very powerful disc based TAPE to DISC Utility. It now transfers even more programs than ever before. Replica 3 will not work with all programs but then neither will anything else. 30,000 Replicas have been sold to date. It has to be good.

£13 (40 or 80 track)

Acorn's Speech Synthesiser package, complete
Special Offer £18

VIEW PRINTER DRIVER ROM

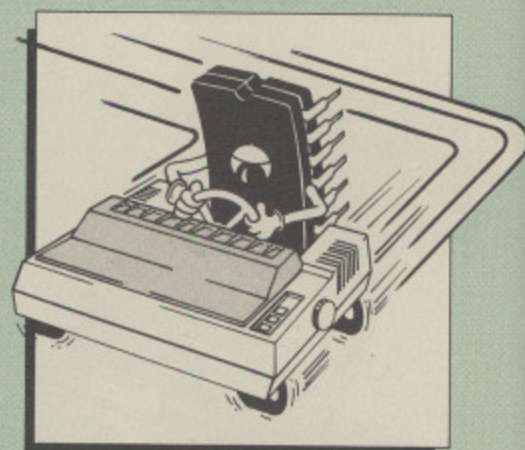

View is a powerful word processor, but until now has seriously lacked in terms of printer support. With the launch of our Printer Driver ROM, which includes an extremely powerful and easy to use Printer Driver Generator, View users can find themselves in the realms of advanced word processing only at a small outlay.

The VPD extends View's printer command with a series of mnemonic commands. All standard highlight sequences are also supported. A large range of printers are supported by drivers contained within the ROM (the drivers can be downloaded and customised). Printers supported include: Epson's MX, RX, FX, LX, JX80 range, HI80, KP810/910, PW1080, JP101, HR15, M1009, GLP, Panasonic KX-P1081/2, JUKI 6100, etc.

Other printers are readily supported by defining a Printer Driver using the built in Printer Driver Generator. The features mentioned below are available to both the built in Printer Drivers and user defined drivers (assuming the printer supports the features).

NLQ control, Underline, Bold, Proportional Spacing, Microspacing, Italic, Superscript, Subscript, Condensed, Enlarged, Double Strike, Set lines per inch numerically (e.g. LPI 6), Set characters per inch numerically (e.g. CPI 5), Select printer font, Select printer ribbon colour, Translation sequences, Emulation of BBC Character Set, Simple numeric expressions for certain operations, Full printer setup, Send control codes, Print prompt on screen, Redefinable Pad character, Pause for key press, Prompt to change daisywheel, and Execute * command when printing.

Other features include a very powerful on screen preview, with bold, italic, underline, super/subscript, enlarged highlights, and a special printer driver to allow memory based text to be previewed by View 1.4. Of course, View 1.4, 2.1 and 3.0 are all supported, as is Shadow RAM and 6502 Second Processors. The BBC B series and Master series of micros are supported. A comprehensive manual is supplied. All in all, a very professional product for the discerning user who wants power at their finger tips. (Write in for a detailed leaflet).

Price: Only £33

EPSON NLQ ROM for the BBC Micro



Harness the full potential of your Epson RX or FX printer. The NLQ ROM makes Epson printers produce Near Letter Quality output with optional proportional spacing, enlarged and underlined. Accessed by simple * commands from Basic, Wordwise and View (with driver) or almost any other language.


(Send an SAE for sample printout)

Only: £25

VIEW PRINTER DRIVER for NLQ ROM

£7

DUMPOUT 3

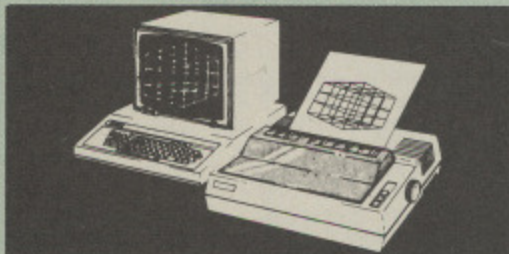

A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including full Mode 7 graphics. Also provided are window setting utilities and OSWORD calls to plot and read Mode 7 graphics pixels.

Facilities:

- Vertical and horizontal scaling in all graphics modes and mode 7
- Rotation of image by 90, 180 or 270 degrees
- Left hand margin setting
- Screen dump window setting
- Colours appear as grey scale
- Two tone fast dump
- Colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered and User Port triggered dumps

The Micro User Feb. 1985.

'Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC Micro ... it must represent excellent value for money and surely cannot be beaten'.

For use with the following printers:

GLP, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, M1009, NEC PC8023, DMP100/200/400, Panasonic KX1081/82, Mannesman Tally and compatibles.

Only: £25

BBC SOFTWARE'S Popular Educational Software

- Maths with a Story 1 (Disc). 4 primary level maths programs **£11.25**
- Maths with a Story 2 (Disc) 4 further maths programs **£11.25**
- Picture Craft (Disc) 6 - 14 age group. Pack consists of flexible geometrical design & colouring programs **£17**
- WAVES: Science Topics (Disc) CSC O Level Physics program. **£14.95**
- RELATIONSHIP: Science (Disc) O Level Biology program. **£20.00**
- BONDING: Science (Disc) O Level Chemistry program. **£20.00**
- ELECTROMAGNETIC SPECTRUM (8 Discs) O Level program. **£20.00**
- ELECTRONICS IN ACTION (Disc) O Level program **£19.95**
- NEWTON & THE SPACE SHUTTLE (Disc) O Level program. **£20**
- ECOLOGY (Disc) O Level program. **£20**
- POLYMERS (Disc) O Level program. **£20**
- Classification & Periodic Table O Level. The suite is supplied with its own database of chemical elements which can be classified according to your own rule. **£20**
- FOOD & POPULATION (Disc) O Level program. **£20**
- MICROTECHNOLOGY (Cassette) O Level program. **£11.25**
- A VOUS LA FRANCE (2 Cassettes) A French language home study aid. **£21.70**
- DEUTSCH DIREKTI (Disc & Audio Cassette) **£19.95**
- Modem Master (Disc) **£11.25**
- ADVANCED TELETXT SYSTEM **£8.65**
- PERIOD TABLE SOFTWARE **£20**
- Astronomy - Primary (Disc) **£12**
- Computers at Work - Primary **£17.35**
- Introducing Geography - Primary **£17**
- Introducing Geography 11-17yrs **£17.50**
- Electric Fields 6-14 years **£11.25**
- BlackQueen Contract Bridge **£13**
- Espana Viva - 3 Discs **£19.95**
- A Vous La France Disc **£21.50**

THE NLQ DESIGNER

(The First & still the Best)


Supplied with over 25 Different fonts

A massively useful utility for users of the Taxan/Kaga KP810/910 or the Canon PW1080. This program allows you to define NLQ character sets to download into the printer's memory. Full on screen editing of the font. Requires 6264 RAM chip to be fitted in the printer.

Supplied with disc containing over 25 example fonts. (Please specify 40 or 80 track when ordering.) Fonts are: Italic, Courier, Courier Italic, Script, Copper Plate, Shadow, Bold, Double Print and Gothic etc. (P.S. This ROM is not suitable for Epson printers.)

- NLQ Designer ROM, FONT Disc and Manual **£25**
- (Write in for further details on all above ROMS)

ADDER

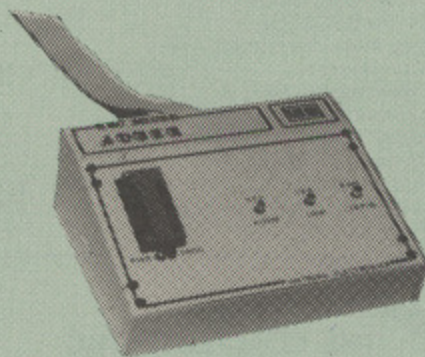

The only low cost EPROM Programmer for the BBC Micro that will program both the standard 21V and the new 12V5, 27128 EPROMS. Adder is the ultimate EPROM programmer for the BBC Micro. It will program many different EPROMs up to the very latest 27256 32K devices.

The Adder unit connects to the User Port and draws its power from there too. The EPROM is mounted in a top quality ZIF socket. There are no switches or controls as Adder is entirely software controlled.

The Adder software provides sophisticated facilities for programming EPROMs from a RAM image produced by loading disc files. The software is menu driven and designed for ease of use.

Features:

- Two ultra fast programming algorithms or standard slow algorithm.
- Supports standard 21V programming and newer 12.5 volt EPROMs. (Software switched).
- The RAM image to be programmed can be built up in many ways. Sections of image can be loaded separately. Part programming. Read EPROM. Edit data in memory.
- Automatic processing to handle a list of files to program into the EPROM.
- Automatic disc buffering to allow programming of 32K 27256 devices from a 32K file without extra effort.
- Verification gives detailed error list and checksums are maintained. There is also a blank check facility.
- Works with all standard filing systems. Generates header code for RFS ROMs to allow Basic programs etc. to be stored in EPROM. More than one file per ROM permitted.
- Programs the following EPROMs: From 2K to 32K: 2516, 2716, 2532, 2732, 2764, 2764A, 27128, 27128A, 27256 (Both 12.5V and 21V).

£75 (£3 Carr)


TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- ERASER EB - Standard version erases up to 16 chips. **£28 (carr £2)**
- ERASER GT - Deluxe version erases up to 18 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30 (carr £2)**
- Spare UV tubes. **£9**

32K

SHADOW RAM-Printer Buffer Expansion Board

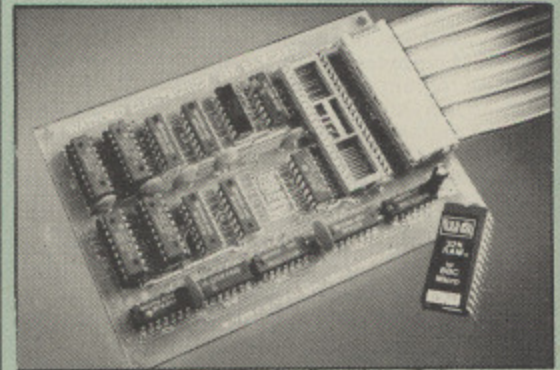

A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Don't throw away your BBC B for a BBC B Plus or BBC Master. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra RAM!!!

- IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer - type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.

- "VIEW" Wordprocessor users can now type in letters in 80 columns and have up to 28,000 bytes free - 5 times as much as normal.

- In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This product is recommended as an ideal complement by Computer Concepts.

- Combine GOOD GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of program space.

- Use the FULL 32K or the bottom 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Print large text files while running long graphics programs, and have all your buffer options available as well (*FX15,21,138,145,ADVAL etc). Please note only a 12K printer buffer can be used with Wordwise or Wordwise-Plus, due to the way they are written.

- Unique facility to turn ROMs off and on again. Unlike all other ROM managers, this feature does not use 'unofficial' memory. Two bytes of normally user-inaccessible memory on the RAM card are used to ensure ROMs are disabled WHERE OTHER ROMS FAIL.

- Recommended by Computer Concepts for use with their Inter series of ROMs.

Only £59 (carr £2)

(Price includes a comprehensive manual and the ROM)

INCREDIBLE WORDPROCESSING DEAL

Watford's 32K SHADOW RAM CARD and Computer Concept's INTERWORD Wordprocessor package.

at Only **£89 (carr £2)**

Continued

BOOKS (No VAT on Books)

15 Hr Wordprocessing BBC/View	£4.95
15 Hr Wordprocessing BBC/WW & WW+	£4.95
30 Hour BASIC (BBC Micro)	£9.95
40 Best machine Code Routines	£7.95
50 Programs in BBC BASIC	£6.95
6502 Assembly Language Program	£19.95
6502 Application	£11.95
6502 Assembly Lang. Subroutines	£19.95
6502 Development Package	£7.50
6502 Reference Guide	£10.95
68000 Assembly Language Prog.	£19.95
68000 Machine Code Programming	£13.00
68000 Microprocessor Handbook	£14.95
68000 Programming the	£22.95
68000 User Guide	£8.95
6809, Programming the	£16.95
6809 Machine Code Programming	£7.95
8086/8088 Assembly Language Prog.	£11.95
8086/8088 Programming the	£16.95
Advanced Disc User Guide	£16.95
Advanced Prog. Guide to BBC	£9.95
Adv. Sideways RAM User Guide	£10.95
Advanced User Guide for BBC	£10.95
Advanced Graphics with BBC	£10.50
Assembly Language Programming on	
BBC Micro	£11.50
Adventure into BBC BASIC	£6.95
Amiga Hardware Ref Manual	£23.70
Applied Assembly Lang. for BBC	£9.95
ARM Assem, Lang, Programming	£12.95
Art of Microcomputer Graphics	£15.95
Assembly Lang. within BBC	£11.95
Basic ROM User Guide	£11.95
BBC B Compendium	£5.95
BBC BASIC for Beginners	£7.95
BBC Forth	£7.50
BBC Micro & Small Business	£5.75
BBC Micro & the small Business	£8.95
BBC Micro Advance Programming	£7.95
BBC Micro Basic Sound & Graphics	£8.95
BBC Micro Programming Tips	£10.95
BBC Micro ROM Book	£10.95
BBC Master 128 for High Flyer	£8.95
BBC Micro Disc Companion	£14
BCPL User Guide	£7.95
BCPL The Language & its Compiler	£7.50
C Big Red Book of	£10.95
C for Beginners	£9.95
C for Programmers	£23.95
C Programming Lang.	£6.95
Complete FORTH	£9.95
Computer Graphics & CAD fundamentals	£16.50
CP-M Bible	£9.95
CP-M Handbook with MPM	£13.95
CP-M Plus Handbook	£16.50
CP-M Soul of	£8.95
CP-M The software BUS	
DOS Instant Reference for Versions thru	
3.3	£10.95
DOS, Mastering for Versions upto 3.3	£19.95
Disc Drive Projects for Micros	£5.45
DISC FILING SYSTEM (DFS)	
Operating Manual for BBC	£6.95
DBASE Programming Language	£14.95
dBase III Plus	£12.95
dBASE III Plus, Quick Ref. Guide	£4.95
dBase III Tips & Tricks	£14.25
Disc Programming Techniques	£9.95
Exploring FORTH	£6.95
File Handling on BBC Micro	£7.50
FORTH-Acorn	£7.50
FORTH-Advanced	£9.95
FORTH-A Text Reference	£19.10
FORTH on the BBC Micro	£9.95
FORTH-Starting	£19.10
Functional Forth for the BBC Micro	£5.95
Guide to BBC ROMs	£9.95
Graphics for Children	£6.95
Hackers Handbook- New	£6.95
Inside Information (Computers,	
Interfacing & Control of BBC Micro	£9.95
Introduction to COMAL	£9.50
Introduction to LOGO	£6.95
Introducing 'C'	£9.95
Introduction to FORTH	£8.95
Introduction to PASCAL	£17.95
ISO-PASCAL Reference Manual	£9.95
LISP 2nd Edition	£15.95
LISP, A Beginners Guide to	£10.95
LISP on the BBC Micro	£7.95
LISP the Language of	
Artificial Intelligence	£9.95
Logo on the BBC Micro	£7.50
Mysteries of DISC DRIVES and DFS	
REVEALED	£5.95
Mastering Assembly Code	£8.95
Mastering CP-M	£17.95
Mastering Interpreters &	
Compilers	£14.95
Mastering Music	£6.95
Mastering the Disc Drive	£7.95
Mastering Operating System	£12.95
Master Reference Manual Part 1	£14.00
Master Reference Manual Part 2	£14.00

Master, Advance Reference Manual	£19
Mathematical Prog. in BBC Basic	£7.95
Micro Prolog	£10.00
Microtext for the BBC	£10.00
MS-DOS Performance Programming	
Under	£19.95
MS DOS Quick Reference Guide	£3.95
Practical Disc File Techniques	£5.95
Programming the 6502	£16.95
Programming the Z80	£19.95
Sinclair Z88 Computing	£9.95
Software Business	£5.50
Structured Basic	£7.95
The Epson FX-KAGA PRINTER	
Commands REVEALED	£5.95
The Software Business	£5.50
Toolbox 2	£10.95
Towers Int. Transistors Selectors	£12.95
Understanding Interword -	
A Beginners Guide	£6.50
Using DOS + Amstrad PC	£9.95
View 3.0 User Guide	£10
View Guide	£4.50
Mastering View, Viewsheets &	
Viewstore	£12.95
VIEW Dabhand Guide	£12.95
VIEW incl. ViewSpell & ViewIndex	£12.95
Viewsheets User Guide	£10
Viewstore User Guide	£10
Within the BBC Micro	£13.95
Writing Interactive Interpreters	
& Compilers	£8.45
Wordprocessing BBC	
Beginners Guide	£7.95
Wordstar & CP/M made easy	£9.95
Wordwise + A User Guide	£9.95
Z80 Applications	£15.95
Z80 Assembly Language Prog.	£19.95
Z80 Reference Guide	£9.95

NEW

THE COMPLETE BBC
COMPUTER USER HANDBOOK

"Why has no-one written a book like this before? It's long overdue"

If you own a BBC-B, BBC B+, Electron, Master 128, Master Compact or Archimedes then this book is for you. It shows you how to get the most from your computer, and how to make the computer work for you. Although some sections are machine specific, most of the information, programs, hints and good solid experience are for the whole range of BBC machines. The general style and level means that both beginner and expert will feel satisfied with the quality and quantity of the material.

GENERAL - Uses and abuses of computers.

HARDWARE - How to design your own work station. Hardware additions (disc drives, ROMs, printers, 2nd processors, etc). DIY alterations.

HARDWARE RUNNING BBC-BASIC - All BBC machines are described with their differences. Compatibility between the various BBC machines. Networks. The Archimedes and its advantages.

GETTING ORGANISED - so that you keep track of your programs and control of your software. Setting up for easier programming sessions.

NEAT PROGRAMMING - Good style. Writing structured programs. Getting the best from BBC-BASIC, Graphics and screen displays. Speeding up programs. Saving space.

GENERAL PROGRAMMING TIPS AND HINTS - with a multitude of examples (eg input vetting, dealing with dates, blanking out function key messages, error trapping, disabling ESCAPE and BREAK, use of EOR with colour, etc).

DEBUGGING - Specific errors and how to handle them. How to test programs fully.

STANDARD PROGRAMS - Assessing word-processors, spread-sheets, databases, graphics packages, communications etc. How to customise them to your own requirements.

COMPUTERS AT HOME AND IN THE OFFICE - Introducing the computer to the office. Program

protection. Computers and the law. Communications. Selling your own programs. 28 FULL CHAPTERS, elegantly written and extensively indexed. To dip into, consult, or read from cover to cover, again... and again... and again...

Only: £14.95

TED

THE ULTIMATE TELETEXT SYSTEM

TED is one of a new generation of powerful 32K ROMs for the BBC B, B+ and Master computers and is compatible with disc, tape and network systems. It is in everyday use in schools, colleges and universities, Programmers, Prestel I.P.'s, Micronetters and exhibitors have also found it indispensable.

TED includes the most comprehensive teletext (Mode 7) screen editor ever written for the BBC micro, combining flexibility with ease of use. Its sophisticated facilities include line, column and block copying within AND between frames; text, in a variety of styles and sizes, entered directly from the keyboard; graphics and line drawing modes; search and replace; margins; printer dump routines and a library of in-built icons and typefaces. TED will edit ANY mode 7 screen and can even convert high-res graphics screens to mode 7! Included within the ROM is a fully Epson compatible mode 7 graphics dump routine giving a grey scale printout of exactly what appears on the screen.

Using '*SHOW' (a versatile carousel), collections of mode 7 screens may be 'routed' or displayed sequentially, making it ideal for creating and running 'Viewdata' information systems. Over 1200 frames may be stored on a twin 80 track drive. A unique feature of TED is '*SCROLL', which lets you create pages of up to 600 lines which may be viewed 'Wordwise style', automatically or manually. SHOWS and SCROLLS may be freely mixed and even used from within a BASIC program.

The package comprises a 32K ROM, a 117 page manual, a function-key strip and a demonstration disc containing examples of real-time animation and a sample 55-frame database. A stand-alone machine code routine is provided allowing SHOWS and SCROLLS to be displayed on machines not fitted with TED.

Price: £35

ROM-SPELL




Probably the most advanced and fastest spelling checker available for the BBC Micro. Compatible with View, Wordwise and Wordwise Plus ROMSPELL is simple to use with easy editing of incorrect words. Full facilities for editing the user dictionary to allow customisation to your personal needs. Dictionary includes over 30,000 words and is supplied with a Comprehensive manual.

NOT compatible with 1770 DFS.
(Please state 40 or 80 track disc)

Price still only: £25

ROM MANAGER

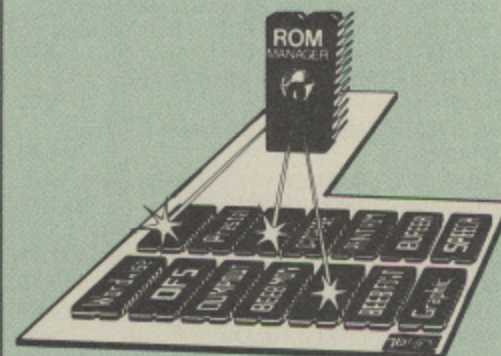

Take control of your Sideways ROMs with ROM Manager. This powerful utility ROM gives you power over your sideways ROMs. Disable whole ROMs, send commands directly to named ROMs and many other powerful facilities.

"Provides comprehensive management of all your installed ROMs". (BEEBUG November '84.)


ONLY £20

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources which put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. A must for every computer user.

Protection for only **£7.50**

4 WAY MAINS DISTRIBUTION SOCKET

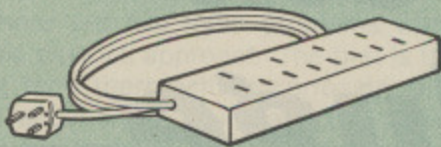

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals.

£7.95 (carr £1.50)

SPIKES CLEANER UNIT

A 4 way mains distribution unit as above with a built-in Surge Arrester, providing protection for your complete computer system

£13.50 (carr. £1.50)

ROM EXTRACTION TOOL

This extremely useful tool allows you trouble free chip insertion and removal from your computer by distributing the removal force over the whole body of any 24 or 28 pin chip.

£2

Replacement FLEXIBLE 17 way Keyboard Connector £3

28pin DIL HEADER PLUG

SOLDER type **£1.50**; IDC CRIMP type **£1.95**

8 WAY DIP SWITCH

Increase the speed of your Disc Drives by soldering this switch to your BBC B or B+ Keyboard.

Only **£1.00**

28 pin ZIF SOCKET (Textool) £6.95

Watford DATA DUCK

Convert two single Disc Drives into one Dual Drive with this simple external unit (suitable for disc drives with PSU).

£14

Watford POWER DUCK £8

CONNECTING LEADS

(All ready made and tested)

CASSETTE LEADS 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug **£2.00**
to 3 pin DIN Plug + 1 Jack Plug **£2.00**
to 7 pin DIN Plug **£2.50**
to 3 Jack Plugs **£2.00**
6 pin DIN to 6 pin DIN Plug (RGB) **£2.50**

DISC DRIVE POWER LEADS

Supply from BBC power supply to standard Disc Drive connector.

Single **£3.00** Dual **£3.75**

DISC DRIVE INTERFACE LEADS

BBC to Disc Drives Ribbon Cable
Single **£4** Twin **£6**

Miscellaneous Connectors

	Plugs	Sockets
RGB (6 pin DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	80p	200p
Disc Drive Plug 4 way	75p	-
6 way Power Connector	80p	95p

Watford Electronics are the main Approved Stockist of ACORN SPARES and Acorn ECONET Referral Centre

Antistatic Aerosol Spray

Ideal for cleaning and preventing static build-up on TV/Monitor Screens.

£2.50

AEROSOL DUST SPRAY

This simple to use aerosol spray is ideal for removing Dust and Dirt deposits from the Keyboards and similar inaccessible places.

£3

SPARES for BBC Micro

Keyboard	£43	Speaker	£2
UHF Modulator	£4	Keypad	£1.50
Speaker Grill	£1	16MHz Crystal	£4
Power Supply	£56	32.768MHz Xtal	£1.00
BBC Casing	£20	Keystrip	£3

CHIP SHOP

8271	£40.00	ASSORTED ROMS	
DS3691	£4.50	ACORN ADFS	£25
DS88LS120	£5.25	ACORN BASIC 2	£19
LM324	£0.45	Acorn BCPL	£42
SN76489	£5.50	Acorn COMAL	£38
SAA5050	£8.75	ACORN DNFS	£17
UPD7002	£7.00	Acorn FORTH	£32
WD1770	£10.00	Acorn Graphics	£25
2764-250nS	£3.00	Acornsoft C	£74
27128-250nS (12V5)	£3.25	Acorn LISP	£19
27128-250nS (21V)	£4.50	Acorn LOGO	£49
27256-15	£5.00	Acorn OS B+	£25
27512	£9.50	Acorn OS 1.2	£14
27C101G (1 Meg)	£20.00	Basic Editor	£24
4013	60p	Beebfont	£25
4020	£0.90	Beebmon	£22
4164-15	£1.75	BROM Plus	£32
4464-12	£5.25	Buffer & Backup	£20
4464-15	£4.25	Communicator	£49
4816 RAM	£2.00	Commstar	£29
41256-15	£3.75	Graphics Extension Rom	£21
41256-12	£4.75	GXR-B	£21
6264LP-8K	£2.75	GXR-B+	£22
6502A CPU	£4.75	Help II	£27
65C02 3M	£9.75	ISO Pascal	£51
65C12	£9.00	ISO-Pascal Stand	£30
6512A	£10.00	Alone Generator	£28
6522	£3.40	ICON Master	£45
6522A	£5.00	Logotron LOGO	£45
65256ALS-15	£8.00	Master Termulator	£34
6818	£4.00	Micro Prolog	£62
6845SP	£6.00	Microtext Disc	£48
68B50	£2.95	Microtext Rom	£199
68B54	£7.50	Mini Office ROM	£47
7438	40p	MUROM	£21
74LS00	25p	ROMIT	£29
74LS04	25p	Serial ULA	£13
74LS10	25p	TERMULATOR	£25
74LS123	80p	Toolkit Plus	£31
74LS163	70p	Video ULA	£14
74LS244	80p	ULTRACALC	£26
74LS245	£1.00	1Mb OS ROM	£39
74ALS245	£2.75		
74LS373	£1.00		
74LS393	£1.00		
75453	70p		
75159	£2.00		
9637	£2.00		

Watford Dealers' List

UNITED KINGDOM

Alpha Microtec Ltd, 321 Stratford Road, Shirley, Solihull, West Midlands. Tel: 021-745 8998.

Badger Micros (Devon), Badger's Hill, Southerton, Ottery-St. Mary, Devon EX11 1SE. Tel: 0395 68516.

Beebug Retail, Dolphin Place, Holywell Hill, St. Albans.

Cambridge Computer Store, 4 Emmanuel St., Cambridge CB1 1NE. Tel: 0223 358264.

Circuit Distribution Ltd, Park Lane, Broxbourne, Herts.

C.J.E. Micros, 78 Brighton Road, Worthing, West Sussex. Tel: 0903 213361.

HCCS, 575-583 Durham Road, Low Fell, Gateshead, Nr. Newcastle Upon Tyne. Tel. 091 4870760.

Mancomp Ltd, Printworks Lane, Levenshulme, Manchester. Tel: 061-224 1888-9888.

Microman Computers, Pasture Lane Farm, Pasture Lane, Rainford, St. Helens, Merseyside WA11 8PU. Tel: 074488 3667.

The Computer Depot, 205 Buchanan Street, Glasgow G1 2JZ. Tel: 041-332 3944.

Verospeed Ltd, Boyatt Wood, Eastleigh, Hants.

OVERSEAS DEALERS

*Absolute Electronics, Rewal House, 208-210 La Trobe Street, Melbourne, 3000, Victoria, Australia. Tel: (03) 663 2411.

Alpha Computer Co, Shop 314 Chi Fu Commercial Centre, Chi Fu Fa Yuen, Hong Kong. Tel: 5-506592.

Computer Distribution Company, Parklaan, 47, 8-9300 Aalst, Belgium.

E.B.N., Elisenstrasse 13, 1000 Berlin 41. Tel: (030) 7952057

Lendac Data Systems, Unit 31, IDA Enterprise Centre, Pearce Street, Dublin 12. Tel: 710796.

Scientex P.V.B.A., Zilversmidstraat 2, B-2000 Antwerpen, Belgium. Tel: 03 233 59 06

Techno-matic Data, Holbergsgade 19, 1057 Kobenhavn K, Denmark

*Velobyte, Scheaedyksadyk 5a-6a, 3011 EB Rotterdam, Holland. Tel: (010) 413 8197/414 5171.

Viking Tecno, Vestergade 12.1, 9620 Aalestrup, Denmark. Tel: 08 642522

*Acorn/Watford Referral Centres.

Viglen Console Unit

Enhance the appearance and convenience of your BBC Micro & Master with the Viglen console unit.

BBC £45; Master £55 (carr. £4)

Prices subject to change without notice and available on request. ALL OFFERS subject to availability.

Mail Order and RETAIL SHOP. Trade and Export inquiries welcome.

Government and Educational Establishments' OFFICIAL ORDERS Accepted.

Shop Hours: 9.00am to 6.00pm. Monday to Saturday. Thursdays 9am to 8pm. (Free Customer's Car Park)

VAT: UK customers please add 15% VAT to cost incl. Carriage.

CARRIAGE: Unless stated otherwise, minimum £1 on all orders. £3 on Larger items.

On bulkier items, £7 Securicor charge applies (UK mainland only). Overseas orders, carriage is charged at cost.

Specifications of all products are given in good faith but is subject to change without notice. Some items vary in their availability. Please ring for latest delivery situation.

Watford Electronics

JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND
Telephone: (0923) 37774; Telex: 8956095; FAX: 01 950 8989

ORDER VIA
microlink
72-MAG030

**THE BEEB
BODY
BUILDING
COURSE**

Data from the deluge...

Mike Cook continues building his electronic weather station by considering ways of measuring Britain's considerable rainfall

SUMMER is approaching and the birds are building nests inside my BBC Micro – the slot in the back makes it an ideal nesting box. I contemplate the sound of willow on leather and ponder the promised summer weather. So naturally my thoughts turn to rain, and how we can monitor it using our micro.

We have covered most of the components you need for a computerised weather station in the Body Build series so far – the wind speed in the anemometer article in June 1985, pressure in April 1986, wind direction in October, humidity in December 1986 and, finally, temperature in March 1987. So now let's turn our attention to that weather parameter so abundant in our climate – rain.

There are many methods of measuring this, and I want to outline some of them now. Traditionally the way has been to use a rain gauge – a funnel placed over a calibrated container that allows the amount of water collected to be assessed.

Now rainfall is measured in inches – or centimetres – but what that really means is cubic inches. A fall of one inch means that over an area of one square inch, rain has fallen to a depth of one inch.

In order to get a more accurate measure the rain is collected over a much larger area by the funnel and the rainfall calculated by dividing the measured depth by the area of the mouth of the funnel. The only snag with this is that someone has to take the reading each day and empty the gauge.

We could attempt to computerise this process by getting some method of electronically detecting the depth of water – to get a continuous reading would be far too difficult, but to detect a level is quite easy.

If we have two bare wires and allow them to come into contact with water, a current will flow and we can detect this and treat the presence of water just as if a switch had been closed. If we can detect this closure we can read if the water has reached the level of the wires.

This simple principle gave me the idea for the electronic dipstick. If we have several wires, reading which are closed and which are open gives us a measure of the water's depth. Now there is not enough electrical conduction through water to make the digital inputs of the computer respond directly, but there is sufficient to detect with the analogue input port.

If we arrange a resistor chain from the

reference voltage to earth and have the rising water gradually short out the lower ones we can determine the depth of water by measuring the voltage at the first tap in the chain. The theoretical circuit for this is shown in Figure 1.

As water is not a perfect conductor the practical arrangements require a little thought. We must arrange for the earth and the resistor node to have the minimum amount of water shorting it

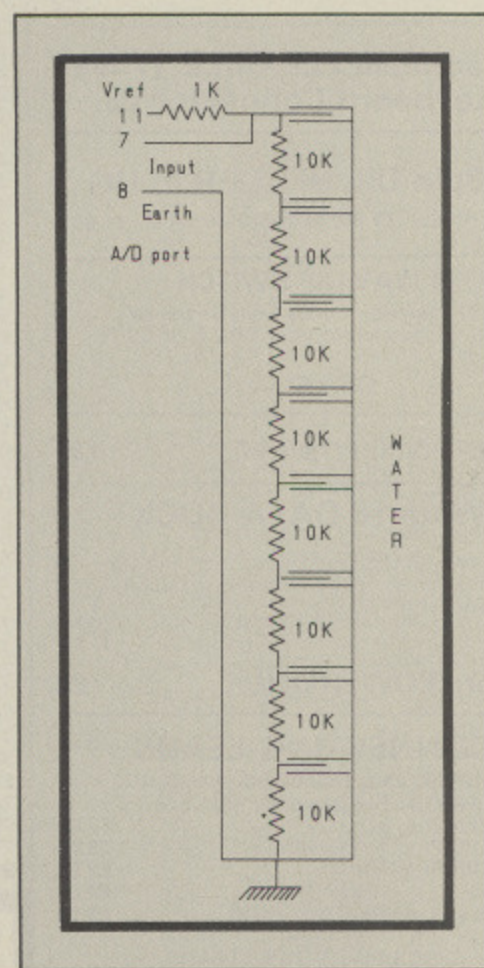


Figure 1: Electronic dipstick

out: This is best achieved with a finger arrangement of printed circuit tracks.

If you want to try this the printed circuit layout is shown in Figure 2. The resistors should be coated in some waterproofing substance like silicon rubber. The type used for sealing round baths is ideal. Also, all the tracks except around the fingers should be protected with a layer of lacquer or nail varnish.

With this arrangement we can detect eight different levels. The printed circuit is laid out so that

level differences of 0.5in are detectable. To read this simply use the statement:

$$L\% = \text{ADVAL}(2) \text{ DIV } 256$$

This will give a value in L% that is reasonably unaffected by stray pickup and you will need to calibrate it by seeing exactly what readings you get for each water level reached.

There are two main problems with the electronic dipstick approach. The first is that over the long term there will be corrosion of the tracks, and secondly if you leave the power on long enough electrolysis – the breaking down of water into its constituent parts of hydrogen and oxygen – will take place.

This happens whenever a current flows through water, and the result will be tiny bubbles of gas forming around the contacts. This effectively insulates the contacts and reduces the shorting effect.

We could take several steps to prevent this. The water could be agitated to remove the bubbles, the current could only be applied for a short time or alternating current could be used. Any would make the design more complicated and would not solve the problem of long term corrosion. So while the electronic dipstick would work for about four months without maintenance, it is not a perfect long term solution.

An alternative might be to have a pair of wires that are lowered into the water-measuring cylinder by a stepping motor. You could then count how many steps it took in order to register a contact, and thus very accurately gauge the depth of the water. However, with this, and the previous method, there is still the need to manually empty the measuring cylinder, and what we really need is one that automatically empties.

This can be achieved by using what is known as a tipping rain gauge – a technique used in professional automatic weather stations. The basic arrangement is a balance, and water is directed on to the light side to tip it over, as shown in Figure III.

The secret of making this work is to have the system as finely balanced as possible, but to have the centre of mass above the pivot. In this way the system never becomes balanced like a pair of scales, because this point is very unstable and it tips from side to side.

So all we have to do is to count the number of tips it has made and we have a measure of the rainfall.

While professional tipping rain gauges cost in the order of a £1,000 we can make a reasonably good one quite cheaply. I made mine out of some three quarter inch copper pipe with a centre section cut out using a file. I then flattened and soldered the centre to make the division between the two halves of the gauge.

As the tube was so big I had to use a blow lamp to do the soldering rather than a soldering iron but epoxy resin would have served equally well.

I made the pivot from a length of brass tube and rod of the type sold in model shops and mounted it on wooden blocks. I then installed the whole arrangement inside the lid of a powdered milk tin.

The size of the mounting blocks determine the angle of tilt and so how much water can accumulate on one side. I cut holes out at each end to

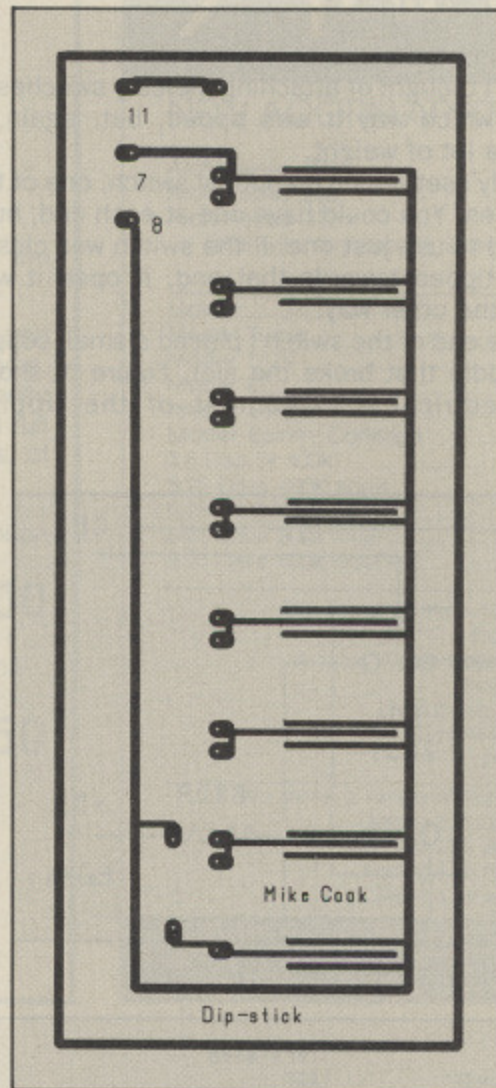


Figure II: PCB for the dipstick

“ All we have to do is count the number of tips ”

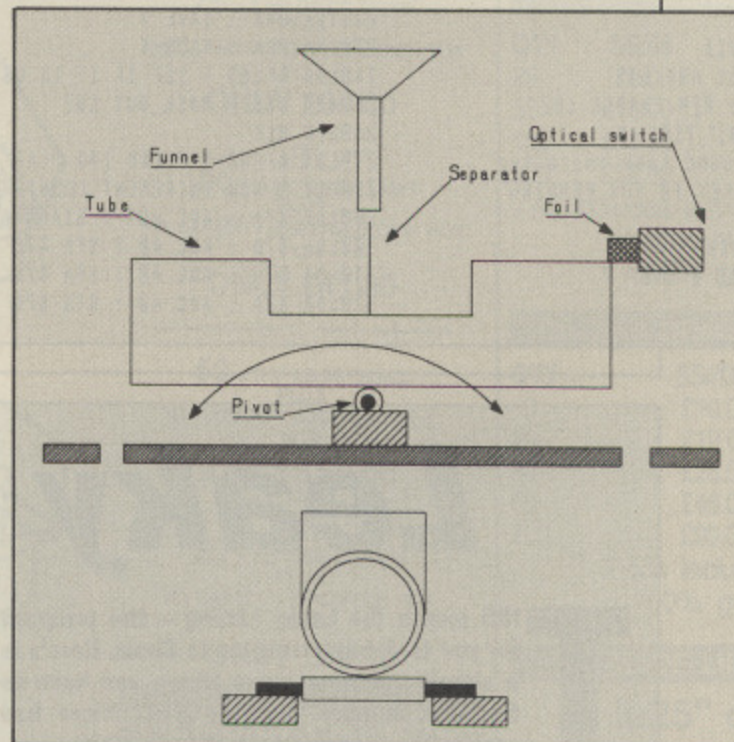


Figure III: Tipping rain gauge

allow the tipped water to drain out and placed a large funnel over the top of the tin.

The tipping detector could be made in a number of ways. I first thought of placing magnets at each end and arranging a reed switch to be triggered by each tip. I rejected this because it

Turn to Page 116 ►

◀ From Page 115

would add extra weight to the balance.

Then I thought of attaching mercury switches to detect which way it was tipped, but, again, it added a lot of weight.

Finally I settled on an optical switch, one of the slot types. You could have one at each end, but I decided to use just one. If the switch was closed it was tipped towards that end, if open it was tipped the other way.

At the end of the switch I placed a small copper foil paddle that broke the slot. Figure IV shows the electrical arrangement of the tipping

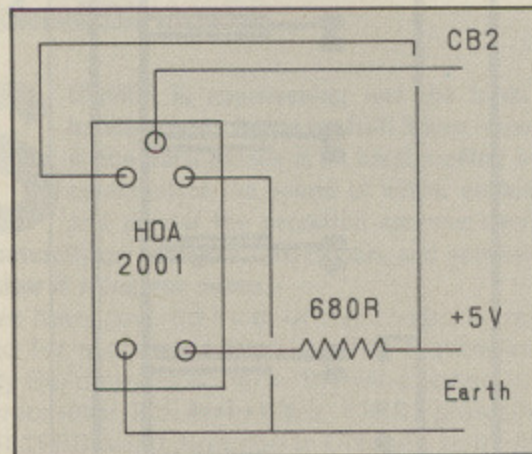


Figure IV: Optical switch tip detector

detector. I carefully calibrated the device by seeing how many tips would be produced from an accurately measured amount of water.

Due to inaccuracies in construction, the left and right tip were not quite equal so I averaged this out in the calibration.

Now, to run a program just to monitor the number of tips would be a little wasteful on computer time, so the listing below is a machine code background task to monitor the switch.

When a tip occurs an interrupt is generated on CB2 and this calls the interrupt service routine to count it in locations &7A through to &7D. It then swaps the edge sensitivity in the VIA to trigger the interrupt when the balance tips the other way.

This background task responds very rapidly, and if you are using any sort of mechanical switch in place of the optical ones you could get trouble with contact bounce causing false tips to be recorded. The simplest solution is to place a small capacitor across the switch.

The only snag with this arrangement is that the micro has to be on all the time to monitor the gauge. As it is a background task you can be doing other things with the micro, but it still has to be on all the time.

This is fine for something like a teletext file server on a network but is not suited to occasionally monitoring the weather. So next month we will look at a way to allow this tipping rain gauge to work on its own and take computer readings whenever we want to.

```

10MODE4
20PRINT"BEEB BODY BUILDING COURSE"
30PRINT"TIPPING RAIN GAUGE"
40PRINT"By Mike Cook"
50!&7A=0 : REM CLEAR TIP COUNT
60PROC_PATCH
70REM SET UP VIA
80?&FE6C=?&FE6C AND &1F
90?&FE6E=&88 : REM ENABLE CB2
100*KEY0 P.!&7A;" TIPS"IM
110PRINT"Background task installed"
120PRINT"PRESS KEY F0 FOR READING"
130END
140DEF PROC_PATCH
150FOR PASS=0 TO 2 STEP 2
160VECT=87E
170PX=&A00
180[
190OPT PASS
200\ INTERRUPT SERVICE ROUTINE
210PHA \ SAVE A
220TXA:PHA \ SAVE X
230TYA:PHA \ SAVE Y
240LDA &FE6D \ SEE IF IT IS US
250AND #88 \ MASK OUT CB2
260BEQ BLK
270LDA &FE60 \ CLEAR IRQ FLAG
280CLC \ NOW INCREMENT COUNTER
290LDA &7A : ADC #01 : STA &7A
300LDA &7B : ADC #0 : STA &7B
310LDA &7C : ADC #0 : STA &7C
320LDA &7D : ADC #0 : STA &7D
330\ NOW TO TRIGGER ON OTHER EDGE
340LDA &FE6C : EOR #20 : STA &FE6C
350LDA &FE60 \ CLEAR IRQ FLAG
360.BLK PLA:TAY \RECOVER Y
370PLA:TAX \RECOVER X
380PLA \ RECOVER A
390 JMP (VECT)
400]
410NEXT
420IF ?&207=&A THEN 470
430?VECT=?&206
440?(VECT+1)=?&207
450?&206=0
460?&207=&A
470ENDPROC
    
```

Leaky Listing

THIS month the Leaky Listing – the program for you to debug – returns to Basic. Here's a simple guessing game where you have to find the number that the BBC Micro has randomly generated – from 1 to 1000.


There are four errors, one point of very bad programming and one omission that should be in any game of this type. In next month's issue of *The Micro User* you'll find the list of the errors, together with one or two hints for good programming.

We realise that there are better ways to write this simple program, so why not send your version to: *Letters, The Micro User, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.* We'll pay £10 for the best one we publish.

```

10 INPUT"How many guesses do you want";max
20 high=1000
30 guess=RND(high)
40 IX=1
50 REPEAT
60 INPUT"what is your guess";yours
70 IF guess>yours PRINT"TOO BIG"
80 IF guess<yours PRINT"TOO SMALL"
90 IF guess=yours GOTO 150
100 IX=IX+1
110 UNTIL IX=max
120 PRINT"You've run out of guesses"
130 PRINT"The answer was "guess
140 END
150 PRINT"You got it!"
    
```

SCIENTIFIC WORD PROCESSING

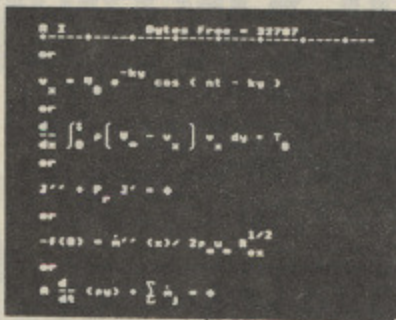

Developed at Edinburgh University, **VUE-SCIENTIFIC** is the first scientific word processing package for the BBC micro.

VUE-SCIENTIFIC is a simple to understand, and simple to use self-contained, what you see is what you get, menu-driven, software package for B, B+ and Master machines. We currently offer 2 versions, of the software, both of which include a full Greek character set and a large range of scientific symbols, of single, double and treble height.

24-pin version including 2 Eproms and user manual, for Epson LQ800 and compatibles.

£65.00

9-pin version including 1 Eprom and user manual, for Epson FX80 and compatibles.

£47.50

When ordering please state which Acorn machine you have.

SPECIAL APPLICATIONS DIVISION (MU5)

Intelligent Machines Ltd,

66 Browning Road,

Bushwood Estate,

London E11 3AR

Phone 01-989 5807

Archimedes

NEW ACORN APPROVED LONDON DEALER

	Basic	Mono	Colour
Archimedes 305	699.00	749.00	899.00
Archimedes 310	777.00	825.00	975.00
Archimedes 310m	835.00	885.00	1035.00

FREE with Archimedes Sales the excellent new Delta Base from Minerva

Master	349.00
Master Turbo	99.00
Master 512K	189.00
Master ET	303.95
Master Econet Module	40.00
Master Eprom Cartridge	13.00
3.5 Disc Dr 400K	86.95
5.25 Drive 400K single	99.00
5.25 Duel 400K P/S	119.00
5.25 Drive 800K Duel	185.00
5.25 Drive 800K Duel P/S	205.00

On demonstration for Archimedes the following:

From Clares:

Artisan, Alpha base, Image, writer and tool kit

From Minerva:

Deltabase, system Delta Plus

From Pineapple software:

Program II

We stock a range of Printer cables and Disc drive leads.

Also a full range of Amstrad PCs

VAT at 15% Access/Visa accepted

Postage & Packing charge extra

We are Licensed Credit Brokers

AUTOMATIC SERVICES, 217 WOOD STREET,
WALTHAMSTOW, LONDON E17 3NT. 01-521 1784

SPECIAL OFFERS

25 x 5.25" DS-DD DISKS
PLUS
100 CAPACITY LOCKABLE DISK BOX
FOR

ONLY £16.50

OR

50 x 5.25" DS-DD DISKS
PLUS
100 CAPACITY LOCKABLE DISK BOX
FOR

ONLY £26.00



20 x 3.5" DS-DD DISKS
PLUS
40 CAPACITY LOCKABLE BOX
FOR

ONLY £28.00

OR


40 x 3.5" DS-DD DISKS
PLUS
40 CAPACITY LOCKABLE BOX
FOR

ONLY £48.00

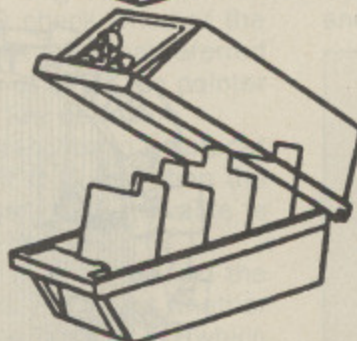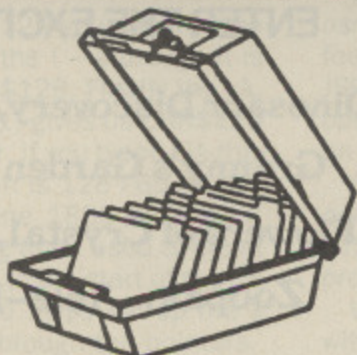

REMEMBER THE PRICE YOU SEE IS ALL
YOU PAY (U.K. ONLY).
THEY INCLUDE VAT AND CARRIAGE

Cheque or Postal Order to:



Manor Court Supplies Ltd

Dept MU4, Glen Celyn House, Penybont,
Llandrindod Wells, Powys LD1 5SY
Telephone: 0597 87784 or 0597 87792

SPECIAL OFFERS

75 x 5.25" DS-DD DISKS
PLUS
100 CAPACITY LOCKABLE DISK BOX
FOR

ONLY £34.00

OR

100 x 5.25" DS-DD DISKS
PLUS
100 CAPACITY LOCKABLE DISK BOX
FOR

ONLY £41.00

50 x 3.5" DS-DD DISKS
PLUS
80 CAPACITY LOCKABLE BOX
FOR

ONLY £60.00

OR

80 x 3.5" DS-DD DISKS
PLUS
80 CAPACITY LOCKABLE BOX
FOR

ONLY £89.00

HEAD CLEANERS

Special offer price if
bought with discs + box
offer

5.25" + Fluid£2.50

3.25" + Fluid£3.50

Both for use with single or
double drives

SPECIAL OFFERS

DISKS 5.25"

QTY	SS/48	DS/48	DS/96
25	£9.00	£10.00	£11.00
50	£16.00	£18.00	£20.00
100	£30.00	£33.00	£36.00
200	£58.00	£61.00	£68.00

All includes envelope, labels and
fitted hub rings
100% guarantee

DISKS 3.5"

QTY	SS/DD	DS/DD
10	£10.00	£13.00
20	£19.00	£25.00
30	£28.00	£37.00
50	£46.00	£52.00
100	£90.00	£100.00

Price includes labels
100% guarantee

UK MADE LIBRARY CASE

5.25" or 3.5"

(10 capacity)

ONLY 95p

(if bought with disks)

DISK BOX

**100 CAPACITY 5.25"
LOCKABLE
ONLY £9.75**

SPECIAL OFFERS

27128-250 2/upp	£4.50
27128-250 2.5 volt	£3.90
27256-250	£4.30
TTL/Cmos chips (exc DFS Rom) for 8271	£2.50

27128C-25 ON/S one time programmable	£3.20
2764-25 ON/S	£2.95
2716-25 ON/S	£2.50
2732-250 N/S	£3.50
6264-150 8K Ram Chip	£2.50
4164-150 N/S	£1.65
41256-150 N/S	£6.50
41257-150 N/S	£6.50
TC511001 (Mos. version (1Meg))	£26.12

SPECIAL OFFERS

3.5" D/S D/D 135 tpi disc	£1.25 each
3" D/S D/D CF2	£2.85 each
5.25" D/S D/D 96 tpi Complete with envelope	£0.55 each

8211	£42.00
W.D-1772	£13.50
20 meg Hard disc drive adapted to use with BBC computers complete with P.S.U. controller board casing and also with operating manual	£452.00

We also have in stock Hard disc drive up to 85 meg - Price on application - Please phone.

All prices include P&P

Send your order by post with cheque or postal order. Or phone through your order by quoting your Access number

HOT LINE

24 Hrs Service 01-550 6514 24 Hrs Service

Please phone for special price on bulk purchase

If any products purchased from this advert fails to give complete satisfaction. Please return to us unused within 30 days for a full refund or free replacement. This guarantee is offered in addition to your statutory rights.

No VAT is charged (Not VAT Registered)

Prices are correct at time of going to press. J & J Microchips Ltd reserves the right to change prices without prior notice

J & J MICROCHIPS LIMITED
PO Box 18, Essex IG8 0RB

Co. Reg. No: 1965704

POOLSWINNER II

THE ULTIMATE POOLS PREDICTION PROGRAM

- **MASSIVE DATABASE** Poolswinner is a sophisticated Pools prediction aid. It comes complete with the largest database available - 22000 matches over 10 years.
- **PREDICTS** Not just SCOREDRAWS, but AWAYS, HOMES and NO SCORES.
- **SUCCESSFUL** SELEC guarantee that Poolswinner performs significantly better than chance.
- **ADAPTABLE** Probabilities are given on every fixture - choose as many selections as you need for your bet. The precise prediction formula can be set by the user - you can develop and test your own unique method.
- **SIMPLE DATA ENTRY** All team names are in the program. Simply type in the reference numbers from the screen. Or use FIXGEN to produce fixture list automatically (see below).
- **LEAGUE AND NON-LEAGUE** All English and Scottish League teams are supported, and also the non-league sides often used on pools coupons.
- **PRINTER SUPPORT** Full hard copy printout of data if you have a printer.



PRICE £18.00 (all inclusive)

NOW AVAILABLE

FIXGEN 87/8

AT LAST: No more struggling for hours to get the fixture list into the computer. FIXGEN has been programmed with all English and Scottish League fixtures for 1987/8. Simply type in the date, and the full fixture list is generated in seconds. Fully compatible with Poolswinner. Yearly updates available.

POOLSWINNER with FIXGEN £19.50 (for both)

COURSEWINNER v3

THE PUNTERS COMPUTER PROGRAM

NOT JUST A TIPSTER PROGRAM

Coursewinner V3 can be used by experts and occasional punters alike. You can develop and test your own unique winning system by adjusting the analysis formula, or use the program in simple mode. Coursewinner V3 uses statistical analysis of major factors including past form, speed ratings, course statistics, prize money, weight, going, trainer and jockey form etc. etc. It outputs most likely winners, good long odds bets, forecasts, tricast etc. The database includes vital course statistics for all British courses. You can update the database - never goes out of date. FULL PRINTER SUPPORT.

PRICE £18.00 (all inclusive) includes Flat AND National Hunt versions.

ALL AVAILABLE FOR

supplied on tape - automatic conversion to disc

AMSTRAD CPCs
BBCs
COMMODORE 64/128
SPECTRUM

DISCS ADD £3.00

AMSTRAD PCW
IBM Format
COMMODORE AMIGA
ATARI ST

Send Cheques/POs for return of post service to ...

selec

SOFTWARE

VISA phone 24 hrs

62 ALTRINCHAM RD, GATLEY, CHEADLE, CHESHIRE SK8 4DP. ☎ 061-428 7425

(Send for full list of our software)


Computer Repairs (UK)

2 Austins Place, High Street,
Hemel Hempstead, Herts, HP2 5HN.
Telephone: 217624




REPAIRS

Archimedes	P.O.R.
BBC Model B	£34.50
Electron	£29.50



FLIP-OVER FUNCTION STRIP HOLDERS

Each holder comes with 10 clear plastic sleeves. Easily fitted to the BBC or BBC - Master series.

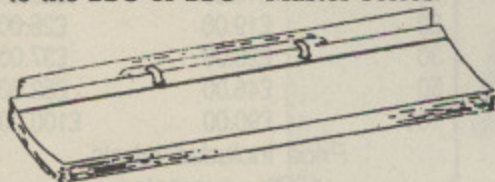

only
£6.50

Flip over function strip holder	£6.50
Extra sleeves for above	£0.40 each
Blank function strip cards	10 for £1.25
Function strip design software	£4.50

SPECIAL OFFER

1 holder, 1 disc copy of software and 10 cards	£10.00
OR 1 holder, 10 extra sleeves and 10 cards	£10.00

<CR> VOLUME CONTROL SWITCH


Hardware volume control switch easily fitted to BBC.....£7.50

We specialise in 2nd user equipment
Telephone for price.

All prices include post, packing etc. in (G.B.)

ENTER THE EXCITING WORLDS OF

Dinosaur Discovery, Box of Treasures
Granny's Garden, DragonWorld,
Flowers of Crystal, The Big Calculator
Zoopak, Tele-Book, Bush Rescue

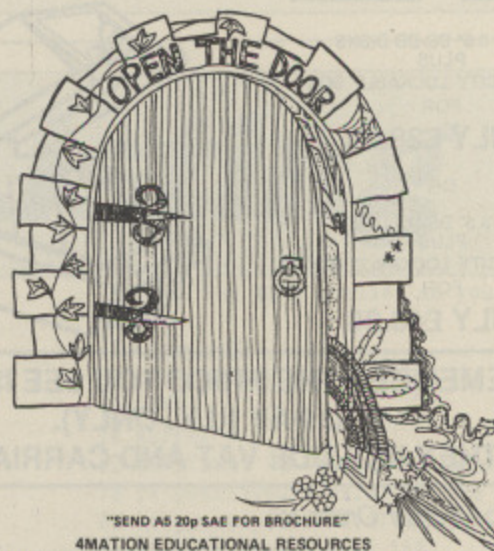

"SEND A5 20p SAE FOR BROCHURE"

4MATION EDUCATIONAL RESOURCES
LINDEN LEA, ROCK PARK, BARNSTAPLE, DEVON EX32 9AQ
TELEPHONE: 0271 45566

4MATION Educational Resources

ELECTRONIC MAILBOX TTN5 01:YNK045

Control those function keys

Robin Nixon concludes his series on adding extra commands to BBC Basic



THIS month we'll investigate adding a more powerful command to BBC Basic using the methods we've covered in the March and April articles. It is FLIST, which lists all of the function key definitions in a form that can be easily edited. But first let's have a brief look at how the function keys work.

The definitions – in the B and B+ – are stored in 256 bytes starting at &B00. The first 16 bytes point to the start of each key's definition, but as there is no pointer to the end of a definition, you must use the start of the next definition to get its length.

When defining function keys, codes less than 32 or greater than 126 must be represented by a control sequence. For example, if you want to enter the code for Return – CHR\$13 – you have to type !M. The ! stands for Control and M is the 13th letter of the alphabet.

If you want to enter code 129 you should type !!A. Again ! is Control and the ! – although it is CHR\$33 – is treated as CHR\$128. Finally the !A, which as Control+A is CHR\$1, gives us CHR\$129 when added to 128. However, if you typed !!A this would mean CHR\$193, which is 128+65.

Now on to the coding. Line 1830 sets the Y register to zero. This is going to be used to count through each of the pointers to the start of the 16 function keys. Lines 1870 to 1910 set up the X register which also counts through the pointers.

Then lines 1950 to 1990 check whether the pointer indicated by X is higher than that referred to by Y. If so it has a chance of being the pointer to the next highest function key definition.

In this case the program branches to *greater* at line 3030 where it checks if it is less than the previous next highest number. If so its value is stored by *less* – lines 3090 to 3100.

Once we've tested all 16 pointers to find the next highest, lines 2060 and 2070 test whether location &8B still contains the value of &FF which we stored at lines 1890 and 1900. If so, this particular key definition is null and execution branches to *nodef* at line 2920 where the next definition is checked. But if the definition is not null *printloop* – lines 2160 to 2200 – prints *KEY.

If the function key number is less than 10 then, before printing it, *pdone* at lines 2240 to 2300 prints a preceding space. Otherwise lines 2340 to 2380 print the preceding 1 of any number greater than or equal to 10 then *single* – lines 2420 to 2470 – prints the last digit of the function key number.

Lines 2510 to 2590 then look at each charac-

ter in the definition. If the Ascii value of the character is less than 32 the program branches to *toosmall* at line 2820. If it is greater than 126 the program branches to *toobig* at line 2710.

These two routines print a ! if the value is less than 32 or a !! if it is greater than 126. If neither of these is true then the character is simply printed by *pbyte* at line 2630.

Having done this the program checks whether the whole definition has been printed at line 2650. If it has, the program jumps to *nodef*. If not, execution goes back to *pstring* where the next character goes through the various checks before being printed, and so on.

At line 2930 we check whether we've looked at all the definitions and if not, we go all the way back to *loop1* and repeat the whole process again on the next function key.

Otherwise, at line 2990 the program jumps to *osnewl*, which prints a carriage return and line feed. We jump straight to it rather than doing a JSR followed by an RTS because *osnewl* is an operating system subroutine which already has an RTS at the end.

Because we previously pushed the address of *quit* on to the stack at lines 1550 to 1580, the RTS returns us to *quit* where we tidily exit the program.

Well, that's it – for now anyway. If you come up with some useful extra commands, send them in and if there's room we'll publish the best ones.

```

100 REM*****
110 REM*      *
120 REM* FLIST SOURCE *
130 REM* Function Key *
140 REM*   Lister   *
150 REM* Robin Nixon *
160 REM*      *
170 REM* (c)MicroUser *
180 REM*      *
190 REM*****
200 REM
210 MODE 7
220 PROCinit
230 FOR PASS=0 TO 3 STE
P3
240 P%=&900
250 [
260 OPT PASS
270 \
280 .start
290 \
300 LDA basic
310 CMP &8015
320 BEQ vectors
330 LDX #0
340 \
350 .errloop
360 \
370 LDA errmess,X
380 BEQ enderr
390 JSR oswrch
400 INX
410 JMP errloop
420 \
430 .errmess
440 \
450 OPT FNequs(CHR$13+C
HR$10+"This utility is fo
r Basic"+CHR$32)
460 \
470 .basic
480 \
490 OPT FNequb(B%+48)
500 OPT FNequs(CHR$32+"
only!"+CHR$10+CHR$13+CHR$

```

Turn to Page 121 ►

B B+ m label A

RIVERS

RÉPARIS

Acorn - Apple

Am - BBC - C

Amiga - Atari

Atari - Commodore

Commodore - IBM

IBM - Intel

Intel - Microsoft

Microsoft - NEC

NEC - Philips

Philips - Sharp

Sharp - Sony

Sony - Tandy

Tandy - Texas Instruments

Texas Instruments - Zenith

Zenith - Other

Other - Various

Various - Misc

Misc - Unlabeled

Unlabeled - Misc

Misc - Unlabeled

Unlabeled - Misc

Misc - Unlabeled

Unlabeled - Misc



Dave's been down-under!

Unfortunately, they sent him back. His father did all he could, but to no avail. Apparently David was beating the Aussies at "Hopper" (as well as cricket) and they didn't like it. Anyway, he's back, so if you come to see our full range of BBC software and hardware, disc drives, printers, monitors, cables etc, and you hear an Australian accent, it will only be David showing off. Actually, he sounds better than he used to!

NUMBER ONE IN BROMLEY

Data Store

6 Chatterton Road, Bromley, Kent. Tel.: 01-460 8991

RIVERSIDE SYSTEMS LTD.

REPAIRS - REPAIRS - REPAIRS

Acorn - Akhter - Amstrad - Apple - Apricot
Atari - BBC - Commodore - Cumana - Econet
mPeripherals - Microvitec - Mitsubishi
Panasonic - Philips - Seimens - Sinclair - Star
Tandon - Taxan - Victor - Viglen etc.

Repairs performed promptly and efficiently. Guaranteed for six months. Equipment accepted and returned via post, courier or bring/collect it yourself. Suppliers of both hardware and software. Specialist suppliers to charities, local council, health and education authorities.

LET THE PROFESSIONALS FIX YOUR FAULTS FOR YOU!!!

FOR FULL DETAILS TELEPHONE 01-407 2486

P.O. BOX 655, LONDON SE1 9AJ

Warranty Repair Centre for Acorn, Amstrad, BBC, Panasonic

MONITORS - DRIVES PRINTERS - 8271/1770 & COMPONENTS

VIGLEN CONSOLES - PC STYLE

BBC B Console £41.30 (d)
Master Console (Professional) ... £48.25 (d)
Supports Monitor, can enclose two drives

WINCHESTER - Lower Prices

Fully compatible
Well known make-Phone, SAE Leaflet
(Master-Plug-n-Go-B requires 1770 DFS and ADFS)
20MB Drive £433.50 (d)
28MB Drive £451.20 (d)

5.25" 40/80 TRACK D/SIDED DRIVES

-new switched cased drives with leads
(Famous Japanese mechanisms)
SINGLE (400k) Prices £82.50 (c)
DOUBLE (800k) Slashed! £165.00 (c)
Master Bridge-Twin (800k) Drives
with PSU £185.00 (d)
5.25"+3.5" Combo with PSU £208.85 (c)
Single 3.5" (400k) with PSU £111.25 (c)
Double 3.5" (800k) with PSU £197.35 (c)

DFS KITS with fitting instructions

1770 Kit (Inc Acorn Rom) £38.50 (a)
Package Price
1770 (DFS without Rom) £32.00 (a)
Acorn ADFS with utilities £26.00 (a)

THIS MONTHS SPECIAL

UFD 2000 20MB Hard Drive +SW (400K)
Floppy+PSU & Monitor Bridge. £659.00 (d)
Single (400K) Drive+ 1770 DFS £121.00 (c)
Double (800K) Drive+ 1770 DFS £199.50 (c)
NOW CHEAPER THAN EVER!

ADVANCED COMPUTER PRODUCTS

Adv 1770 DFS or Adv Disc Tikit. £28.50 (b)
Advanced Disc Investigator £23.50 (b)

UNIVERSAL DISCS

Up to 80T DSDD Clear plastic case inc.
Box of 10. Reduced £5.95 (a)

CONTROLLERS, CPU'S, ETC

WD1770/72 £12.90 (a)
6502A CPU £4.65 (a)
65C02 Low Power CPU £9.65 (a)

MEMORIES

4416-15NL (TMS or NEC) £2.30 (a)
41464-12 (Solidisk 41254-12) £4.50 (a)
41416-15 (Watford 48415) £2.30 (a)

EPROMS VPP 12.5V (21V as available)

27128-250ns £3.30 (a)
27256-250ns £4.20 (a)
27512-250ns £9.45 (a)

TTL-DFS CHIPS ETC - Prices on Request

PRINTERS

MP 135 137CPS, NLQ £147.00 (d)
Epson LX86 100CPS, NLQ £215 (d)
Epson FX800 160CPS, NLQ £340 (d)
Canon PW1088 160CPS, NLQ £230 (d)
BBC Printer Lead £6.00 (a)

MONITORS

Philips BM7502 12" Green £68.55 (d)
Philips BM7522 12" Amber £73.85 (d)
Hantarex CT9000 Med
Res Colour £170.00 (d)
Taxan KX1201 12" Green £85.95 (d)
Taxan Supervision II
12" Colour £268.55 (d)
Taxan Supervision III
12" Colour £317.25 (d)
See the True Value - NOW -

ALL PRICES EXCLUDE V.A.T.

Mail order only to:

Carriage & Ins.- (a) £0.58, (b) £1.10,
(c) £4.00, (d) £6.96.

Cp microsystems

More than one item? All sent in one parcel.
Choose rate for your dearest item.

32-34, Surbiton Road, Kingston upon Thames,
Surrey KT1 2HX.
☎ 01-394 1452

Add 15% VAT to goods & carriage total price
ALL GOODS NORMALLY IN STOCK

(Answerphone - we're despatching orders, we'll ring back).

Local Authority Orders accepted

DISKETTES/MEMORIES

5.25" UNBRANDED

	Qty 10	25	50
DS/DD 40T	6.00	12.00	22.50
DS/DD 80T	7.00	14.00	24.00

5.25" TOP QUALITY MAXELL

DS/DD 40	14.00	-	60.00
DS/DD 80	18.00	-	80.00

3.5" UNBRANDED

SS/DD	12.00	27.50	50.00
DS/DD	15.00	35.00	70.00

27128 - 250 NS 21V 4.50
27256 - 250 NS 12.5V 5.00
27C256 - 250 NS 12.5V 6.00
27512 - 250 NS 12.5V 9.00

DFS KIT (8271+CMOS & TTL ICS) 42.50
ex DFS ROM

NON VOLATILE RAM MODULES

Complete with Read & Write Protect Switches
and Software

16K 22.00 32K 30.00

FLORA ELECTRONICS

14 LEVER STREET, MANCHESTER M1 1LN

Tel: 061-228 3553



◀ From Page 119

```

0)
510 \
520 .enderr
530 \
540 RTS
550 \
560 .vectors
570 \
580 LDA &202
590 LDX &203
600 CMP #main MOD &100
610 BNE changebrkvector
620 CPX #main DIV &100
630 BEQ alreadychanged
640 \
650 .changebrkvector
660 \
670 STA newbrk1
680 STX newbrk2
690 LDA #main MOD &100
700 STA &202
710 LDA #main DIV &100
720 STA &203
730 \
740 .alreadychanged
750 \
760 RTS
770 \
780 .main
790 \
800 PHP
810 PHA
820 TYA
830 PHA
840 TXA
850 PHA
860 LDY #0
870 LDA (&FD),Y
880 CMP #4
890 BEQ checkcommand
900 \
910 .notcommand
920 \
930 PLA
940 TAX
950 PLA
960 TAY
970 PLA
980 PLP
990 JMP (newbrk1)
1000 \
1010 .checkcommand
1020 \
1030 LDA &A
1040 CLC
1050 ADC &B
1060 STA ptr1
1070 LDA &C
1080 ADC #0
1090 STA ptr2
1100 SEC
1110 LDA ptr1
1120 SBC #1
1130 STA ptr1
1140 LDA ptr2
1150 SBC #0
1160 STA ptr2
1170 LDA #keytable MOD&1
00
1180 STA keytab1
1190 LDA #keytable DIV&1
00
1200 STA keytab2
1210 \
1220 .comloop
1230 \
1240 LDY #0
1250 \
1260 .comloop1
1270 \
1280 LDA (keytab1),Y
1290 BEQ found
1300 CMP #58
1310 BEQ notcommand
1320 CMP (ptr1),Y
1330 BNE next
1340 INY
1350 JMP comloop1
1360 \
1370 .next
1380 \
1390 JSR incmatch
1400 BNE next
1410 JSR incmatch
1420 JSR incmatch
1430 JSR incmatch
1440 JMP comloop
1450 \
1460 .found
1470 \
1480 STY offset
1490 INY
1500 LDA (keytab1),Y
1510 STA acadd1
1520 INY
1530 LDA (keytab1),Y
1540 STA acadd2
1550 LDA #(quit-1) DIV&1
00
1560 PHA
1570 LDA #(quit-1) MOD&1
00
1580 PHA
1590 JMP (acadd1)
1600 \
1610 .incmatch
1620 \
1630 LDA keytab1
1640 CLC
1650 ADC #1
1660 STA keytab1
1670 LDA keytab2
1680 ADC #0
1690 STA keytab2
1700 LDY #0
1710 LDA (keytab1),Y
1720 RTS
1730 \
1740 .keytable
1750 \
1760 OPT FNequs("FLIST")
1770 OPT FNequb(0)
1780 OPT FNequw(flist)
1790 OPT FNequb(58)
1800 \
1810 .flist
1820 \
1830 LDY #0
1840 \
1850 .loop1
1860 \
1870 LDA &B00,Y
1880 STA &8A
1890 LDA #&FF
1900 STA &8B
1910 LDX #0
1920 \
1930 .loop2
1940 \
1950 LDA &B00,X
1960 CMP &8A
1970 BCC notgreater
1980 BEQ notgreater
1990 JMP greater
2000 \
2010 .notgreater
2020 \
2030 INX
2040 BNE loop2
2050 LDA &8B
2060 CMP #&FF
2070 BEQ nodef
2080 JSR osnewl
2090 LDA #32
2100 LDX #0
2110 JSR oswrch
2120 LDX #0
2130 \
2140 .printloop1
2150 \
2160 LDA keymess,X
2170 BEQ pdone
2180 JSR oswrch
2190 INX
2200 JMP printloop1
2210 \
2220 .pdone
2230 \
2240 TYA
2250 CMP #10
2260 BCS notsingle
2270 LDA #32
2280 JSR oswrch
2290 TYA
2300 JMP single
2310 \
2320 .notsingle
2330 \
2340 LDA #49
2350 JSR oswrch
2360 TYA
2370 SEC
2380 SBC #10
2390 \
2400 .single
2410 \
2420 CLC
2430 ADC #48
2440 JSR oswrch
2450 LDA #32
2460 JSR oswrch
2470 LDX &8A
2480 \
2490 .pstring
2500 \
2510 LDA &B01,X
2520 CMP #128
2530 BCC smaller
2540 JMP toobig
2550 \
2560 .smaller
2570 \
2580 CMP #32
2590 BCC toosmall
2600 \
2610 .pbyte
2620 \
2630 JSR oswrch
2640 INX
2650 CPX &8B
2660 BNE pstring
2670 JMP nodef
2680 \
2690 .toobig
2700 \
2710 PHA
2720 LDA #124
2730 JSR oswrch
2740 LDA #33
2750 JSR oswrch
2760 PLA
2770 AND #&7F
2780 JMP smaller
2790 \
2800 .toosmall
2810 \
2820 PHA
2830 LDA #124
2840 JSR oswrch
2850 PLA
2860 CLC
2870 ADC #64
2880 JMP pbyte
2890 \
2900 .nodef
2910 \
2920 INY
2930 CPY #16
2940 BEQ fquit
2950 JMP loop1
2960 \
2970 .fquit
2980 \
2990 JMP osnewl
3000 \
3010 .greater
3020 \
3030 CMP &8B
3040 BCC less
3050 JMP notgreater
3060 \
3070 .less
3080 \
3090 STA &8B
3100 JMP notgreater
3110 \
3120 .keymess
3130 \
3140 OPT FNequs("*KEY")
3150 OPT FNequb(0)
3160 \
3170 .quit
3180 \
3190 DEC offset
3200 LDA offset
3210 CLC

```



Turn to Page 122 ▶

UTILITY



◀ From Page 121

```
3220 ADC &A
3230 STA &A
3240 JSR checkend
3250 PLA
3260 PLA
3270 PLA
3280 PLA
3290 PLA
3300 PLA
3310 PLA
3320 PLA
3330 PLA
3340 JMP continue
3350 ]
```

```
3360 NEXT
3370 PRINTSPC1*SAVE FLI
ST "STR$"start "STR$PX"
3380 CALL &900
3390 END
3400 DEFPROCinit
3410 oswrch =&FFEE
3420 osbyte =&FFF4
3430 osnewl =&FFE7
3440 newbrk1=&70
3450 newbrk2=&71
3460 ptr1 =&80
3470 ptr2 =&81
3480 keytab1=&82
3490 keytab2=&83
```

```
3500 acadd1 =&84
3510 acadd2 =&85
3520 offset =&86
3530 B%=(?&8015)-48:IF B
%<1 OR B%>6 GOTO 3870 ELS
E ON B% GOTO 3570,3630,36
90,3750,3870,3810
3540 REM
3550 REM ** Basic 1
3560 REM
3570 checkend=&9810
3580 continue=&8B0C
3590 ENDPROC
3600 REM
3610 REM ** Basic 2
3620 REM
3630 checkend=&9857
3640 continue=&8B9B
3650 ENDPROC
3660 REM
3670 REM ** Hi Basic
3680 REM
3690 checkend=&8D07C
3700 continue=&8C398
3710 ENDPROC
3720 REM
3730 REM ** Master
3740 REM
3750 checkend=&9BA6
3760 continue=&9B05
3770 ENDPROC
3780 REM
3790 REM ** Compact
3800 REM
3810 checkend=&9BA6
3820 continue=&8998
3830 ENDPROC
3840 REM
3850 REM ** Unknown
3860 REM
3870 CLS:PRINT"This Micr
o is not running a compat
ible Basic":END
3880 DEFFNequs(string$)
3890 SP%=string$
3900 PX=PX+LEN(string$)
3910 =PASS
3920 DEFFNequb(byte)
3930 ?P%=byte
3940 PX=PX+1
3950 =PASS
3960 DEFFNequw(word)
3970 ?P%=word MOD &100
3980 PX=?1=word DIV &100
3990 PX=PX+2
4000 =PASS
```

This listing is included in this month's tape & disc offer. See order form on Page 159.

✓ Get it right!

100 = 00 540 = 9843 B	980 = 4C9A 2	1420 = 52EE 7	1860 = 00 3	2300 = EF48 0	2740 = E621 7	3180 = 00 C	3620 = 00 A
110 = 00 550 = 00 B	990 = FB1D 6	1430 = 52EE 8	1870 = 5BE 3	2310 = 00 0	2750 = 9224 8	3190 = DCF4 A	3630 = 999A C
120 = 00 560 = 343B 3	1000 = 00 6	1440 = 5AFD 4	1880 = 28E8 4	2320 = 379D 3	2760 = 4E8A 7	3200 = F23A A	3640 = BA4C F
130 = 00 570 = 00 3	1010 = 553B 0	1450 = 00 4	1890 = CBD5 E	2330 = 00 3	2770 = F060 C	3210 = 74FB 6	3650 = ED0F 7
140 = 00 580 = 74DF D	1020 = 00 0	1460 = DB31 4	1900 = 188B 0	2340 = DEFC E	2780 = 6753 2	3220 = 30FD 8	3660 = 00 7
150 = 00 590 = 3698 E	1030 = 93D6 F	1470 = 00 4	1910 = EA45 6	2350 = 9224 6	2790 = 00 2	3230 = 480B F	3670 = 00 7
160 = 00 600 = 9253 D	1040 = 74FB D	1480 = 408D E	1920 = 00 6	2360 = 6ECC 0	2800 = 1434 A	3240 = 8BD6 0	3680 = 00 7
170 = 00 610 = 54D2 7	1050 = 9E F	1490 = 6623 2	1930 = 372 5	2370 = 8D00 B	2810 = 00 A	3250 = 4E8A A	3690 = 13B9 1
180 = 00 620 = AEF9 E	1060 = 88EC A	1500 = 2761 7	1940 = 00 5	2380 = C4D0 6	2820 = 824E 0	3260 = 4E8A 2	3700 = D6C3 A
190 = 00 630 = F559 A	1070 = B394 4	1510 = 7C99 A	1950 = 159F 9	2390 = 00 6	2830 = 976E B	3270 = 4E8A B	3710 = ED0F 3
200 = 00 640 = 00 A	1080 = A1BE 5	1520 = 6623 C	1960 = E3FE A	2400 = F195 2	2840 = 9224 A	3280 = 4E8A 8	3720 = 00 3
210 = 1092 2	1090 = B88F 3	1530 = 2761 C	1970 = 48F3 D	2410 = 00 2	2850 = 4E8A 1	3290 = 4E8A 2	3730 = 00 3
220 = DEBB 6	1100 = 8D00 4	1540 = 4CFA 8	1980 = F622 5	2420 = 74FB E	2860 = 74FB A	3300 = 4E8A E	3740 = 00 3
230 = E856 F	1110 = 7EF2 D	1550 = AD5F F	1990 = 142B 8	2430 = 6054 9	2870 = C7BA D	3310 = 4E8A F	3750 = 52EF 0
240 = C92F 3	1120 = EDDE A	1560 = 824E 7	2000 = 00 8	2440 = 9224 A	2880 = D851 D	3320 = 4E8A 9	3760 = CE78 1
250 = EB9E 5	1130 = 88EC 9	1570 = E9DC F	2010 = 8B5E 7	2450 = F600 A	2890 = 00 D	3330 = 4E8A 3	3770 = ED0F C
260 = D5D8 8	1140 = 4E91 2	1580 = 824E 4	2020 = 00 7	2460 = 9224 9	2900 = 51F7 0	3340 = 3842 0	3780 = 00 C
270 = 00 8	1150 = FDFF 8	1590 = F5FC 4	2030 = 7602 1	2470 = 23D8 C	2910 = 00 0	3350 = 8B58 C	3790 = 00 C
280 = 3208 1	1160 = B88F C	1600 = 00 4	2040 = EA0C D	2480 = 00 C	2920 = 6623 E	3360 = 2C83 0	3800 = 00 C
290 = 00 1	1170 = B7F4 C	1610 = B08F F	2050 = D6E5 7	2490 = E067 9	2930 = 405D 6	3370 = A6F4 3	3810 = 52EF B
300 = 5DE7 7	1180 = D30A A	1620 = 00 F	2060 = BF9D D	2500 = 00 9	2940 = 1CEF F	3380 = 59C4 7	3820 = 4D68 7
310 = F45A F	1190 = F377 C	1630 = 9992 F	2070 = 66FF 4	2510 = 22AF 1	2950 = 49D0 5	3390 = FD2E 9	3830 = ED0F D
320 = 1922 7	1200 = E369 B	1640 = 74FB D	2080 = A472 B	2520 = FBC8 3	2960 = 00 5	3400 = 344C 3	3840 = 00 D
330 = EA45 7	1210 = 00 B	1650 = B19F 0	2090 = 3334 E	2530 = 8293 5	2970 = E96A F	3410 = 24BA 5	3850 = 00 D
340 = 00 7	1220 = 6051 F	1660 = D30A 5	2100 = F600 6	2540 = A87F D	2980 = 00 F	3420 = 8CD9 9	3860 = 00 D
350 = 7C24 F	1230 = 00 F	1670 = A9F1 4	2110 = 9224 E	2550 = 00 D	2990 = 9C1B A	3430 = 1D85 3	3870 = CC8A 1
360 = 00 F	1240 = 9CF1 8	1680 = A1BE 0	2120 = EA45 8	2560 = 49AC F	3000 = 00 A	3440 = 7903 8	3880 = AF54 2
370 = 9EB4 3	1250 = 00 8	1690 = E369 1	2130 = 00 8	2570 = 00 F	3010 = 3AD4 2	3450 = 87F0 4	3890 = 4776 A
380 = 7FFF F	1260 = 1BD4 A	1700 = 9CF1 1	2140 = DB99 6	2580 = 9A00 A	3020 = 00 2	3460 = 29C7 9	3900 = C308 F
390 = 9224 B	1270 = 00 A	1710 = 2761 6	2150 = 00 6	2590 = 4313 2	3030 = D39D B	3470 = E164 9	3910 = 4348 D
400 = 7602 F	1280 = 2761 E	1720 = 9843 5	2160 = 5C40 D	2600 = 00 2	3040 = A5D9 C	3480 = A962 8	3920 = 54B0 A
410 = 52DB C	1290 = 2EB4 6	1730 = 00 5	2170 = 6DF7 D	2610 = A290 C	3050 = 1566 9	3490 = 5791 4	3930 = 24A9 D
420 = 00 C	1300 = 91EC A	1740 = 74F6 4	2180 = 9224 7	2620 = 00 C	3060 = 00 9	3500 = 964B 3	3940 = 5569 5
430 = BB2C 9	1310 = 28A2 6	1750 = 00 4	2190 = 7602 8	2630 = 9224 1	3070 = B299 A	3510 = 488A C	3950 = 4348 7
440 = 00 9	1320 = B97D 3	1760 = 9274 F	2200 = 45A1 E	2640 = 7602 8	3080 = 00 A	3520 = FD74 6	3960 = 80CE 7
450 = 29F8 0	1330 = 8347 8	1770 = 65D9 5	2210 = 00 E	2650 = 8577 3	3090 = 188B 9	3530 = 9916 8	3970 = 8DBD 1
460 = 00 0	1340 = 6623 B	1780 = FEF9 3	2220 = 9872 7	2660 = F9EB 0	3100 = 1566 2	3540 = 00 8	3980 = B3CD D
470 = ABBD 2	1350 = 20CD 8	1790 = 8BFA 2	2230 = 00 7	2670 = 2B36 1	3110 = 00 2	3550 = 00 8	3990 = 650A A
480 = 00 2	1360 = 00 8	1800 = 00 2	2240 = 6ECC F	2680 = 00 1	3120 = B79E C	3560 = 00 8	4000 = 4348 D
490 = 5226 1	1370 = F3EC 8	1810 = 11F1 8	2250 = DC20 9	2690 = B6A2 1	3130 = 00 C	3570 = 25B9 B	
500 = 9A59 D	1380 = 00 8	1820 = 00 8	2260 = 6FB2 3	2700 = 00 1	3140 = 7A84 A	3580 = 10F5 0	
510 = 00 D	1390 = 52EE E	1830 = 9CF1 6	2270 = F600 B	2710 = 824E 4	3150 = 65D9 E	3590 = ED0F A	
520 = 4545 C	1400 = 8347 8	1840 = 00 6	2280 = 9224 D	2720 = 976E D	3160 = 00 E	3600 = 00 A	
530 = 00 C	1410 = 52EE 7	1850 = 3311 3	2290 = 6ECC E	2730 = 9224 A	3170 = 4F84 C	3610 = 00 A	

WITH
PAYROLL

A LOW COST DISC BASED
**PROFESSIONAL
ACCOUNTING PROGRAM**

For the BBC Computer

"Micro-Trader"

INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. "Micro-Trader" offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of up to 1,000 accounts and 5,000 transactions per month.

Nominal Ledger features quick and easy entry of everyday transactions. Up to 6 Bank Accounts, full V.A.T. facilities, Journal Posting, Full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

"MICRO-STOCK"

Stock Control program, fully integrated with "Micro-Trader". 4,000 Stock Items with user defined Codes. Invoice and Credit Notes and Cash Sales routine. Full Stock Held Reports.

£75.00 + V.A.T.

"EXTENDED PAYROLL"

Micro-Aid Full Feature Extended Payroll. For use stand alone or integrated with "Micro-Trader".


£49.95 + V.A.T.



"MICRO-MAILER"

A Mailmerge program, fully integrated with "Micro-Trader". With a user Database.

£30.00 + V.A.T.



PHONE TODAY FOR A FREE FACT SHEET

MEADOW COMPUTERS

11, LONDON STREET, WHITCHURCH, HAMPSHIRE, RG28 7LH

Telephone: Whitchurch (0256) 892008

**DABS PRESS HYPERDRIVER:
Printer Power**

HyperDriver is an amazing new companion ROM for all Epson-compatible printers, unleashing all their capability, without resort to complex programming and arcane lists of numbers. Over eighty (yes 80!) star commands provide all printer functions. As well as all the standard FX80 commands, your own macros may be built. For example, one customer uses these for colour codes on his Integrexprinter. For VIEW, a special printer driver is provided in the ROM, which provides a unique and invaluable on-screen preview facility, which is available from BASIC as well, and yes, microspacing is at last supported! If you haven't got an NLQ font, don't worry, a beautiful proportional NLQ typeface is built into the ROM. Also you may print using the BBC Micro character set, including any characters you have defined. HyperDriver costs just **£29.95** for the 16k ROM, utilities and examples disc, and comprehensive 100-page manual. (Full data sheet on request).

Other Dabs products available now...

Master Operating System: A Dabhand Guide & Disc	£17.95
"indispensable" A&B Computing	
View: A Dabhand Guide (with disc £17.95)	£12.95
"I liked it" Radio London	
Fingerprint Machine Code Monitor	£9.95
"down-to-earth...efficient..." Tubelink	
Assembler Bundle - two books, two discs 90 programs	£9.95
SideWriter - popup notepad for Sideways RAM	£7.95
MOS Plus - Goodies on ROM for the Master 128	£12.95
Master Emulation ROM - Master features on a BBC	£19.95

Prices inc. VAT and p&p in UK. ACCESS/VISA accepted by post/phone. Products available from most dealers. Free catalogue on request. Add £2 for 3.5" discs. Add £2 (£10 air) if outside UK. Official and trade orders welcomed. See us at all shows.

DABS PRESS (MU) 76 Gardner Road Prestwich Manchester M25 7HU
Tel: 061-773 2413 • Prestel 942876210 • Microlink 72:MAG11596

CARE ELECTRONICS

800 ST ALBANS ROAD, GARSTON, WATFORD,
HERTS. WD2 6NL. Tel: 0923 672102

THE CARE MASTER ROM CARTRIDGE RANGE

Designed by CARE Electronics to Acorns Specifications. High quality, robust cartridges that fit neatly into either of the Master Cartridge slots. Suitable for any ROM inc. Double Height ROMS ie Interword, Spellmaster etc.

	Price Ex VAT	Inc VAT
Care Standard Master Cartridge	@ £9.00	£10.35c
Care 1 x ZIF + 1 x STD SKT Cartridge	@ £13.40	£15.41c
Care 2 x ZIF Socket Cartridge	@ £17.60	£20.24c
Care Quad (4 x Sockets) Cartridge	@ £14.00	£16.10c
NEW Care 2 x 32k SKT Cartridge	@ £12.00	£13.80c
Master ROM Extender for BBC B Carts	@ £13.00	£14.95c

THE CARE BBC 'B' LOW PROFILE ROM CARTRIDGE SYSTEM

Care BBC Low Profile ROM System	@ £12.00	£13.80d
Care BBC ROM Cartridge	@ £3.00	£3.45c
Care BBC ZIF ROM Cartridge	@ £8.00	£9.20c
Care BBC ROM Cart Library Rack	@ £1.60	£1.84c

***NEW* THE CARE CONTROL-57 INTERFACE/CONTROL PCB**

The Control-57 includes 48 programmable inputs or outputs and an 8 channel 8 bit Analog to Digital converter. The kit includes a PCB (excluding components) & full instructions. Please phone for details @ £50.00 £57.50d

THE CARE READY MADE LEAD RANGE

BBC/Master RGB - 6 Pin Microvitec RGB	@ £4.00	£4.60c
BBC/Master RGB - 7 Pin Hitachi RGB	@ £6.20	£7.13c
BBC/Master RGB - 7 Pin Ferguson RGB	@ £6.20	£7.13c
BBC/Master RGB - Euro (Scart)	@ £8.20	£9.43c
Archimedes - Euro (Scart) (not Sony)	@ £12.00	£13.80c
BBC Centronics Printer Lead 1.0m	@ £7.00	£8.05c
BBC Centronics Printer Lead 1.5m	@ £9.00	£10.35c
Archimedes Printer Lead	@ £12.00	£13.80c
NEW RM Nimbus Printer Lead	@ £12.00	£13.80c
Centronics - Centronics Printer Lead	@ £11.00	£12.65c
User Port Extension Lead 0.5m	@ £9.00	£10.35c
Printer Port Extension Lead 1.0m	@ £10.20	£11.73c
1MHz Bus Port Extension Lead 0.3m	@ £10.40	£11.96c
BBC/Master RS423 - RS232c	@ £12.00	£13.00c
BBC/Master RS423 - Archimedes RS423	@ £12.00	£13.80c
Disc Drive Data (Single)	@ £6.00	£6.90c
Disc Drive Data (Dual)	@ £8.00	£9.20c

SOFTWARE RANGE (Please Specify Disc Format Required)

Label Master Comprehensive Label Print	@ £15.00	£17.25d
Care Printer Buffer User Definable	@ £14.00	£16.10d
Inter-Word Word Processor	@ £47.80	£54.97d
Spell-Master Spell Checker	@ £50.00	£57.50d
Mastercopy DFS - ADFS ADFS - DFS	@ £11.26	£12.95c
Desfax Teletext Emulator	@ £20.87	£24.00c

MORLEY ELECTRONICS PRODUCTS

Teletext Adaptor & ATS ROM	@ £100.00	£115.00d
1Mb RAM Disc	@ £174.00	£200.10b
Master 'AA' ROM Board	@ £40.00	£46.00d
Eprom Programmer	@ £30.00	£34.50d
PSU for Teletext Adapter	@ £12.00	£13.80d

SWITCHING UNITS

BBC/Master 6 to 1 Printer Switcher	@ £71.00	£81.65d
Centronics 2 to 1 (inc Lead)	@ £30.00	£34.50d
Centronics 4 to 1 (inc Lead)	@ £70.00	£80.50d
Centronics 2 to 2 'X' Switcher	@ £70.00	£80.50d
Centronics 4 to 1 Automatic Switcher	@ £102.00	£117.30d
Centronics 8 to 1 Automatic Switcher	@ £128.00	£147.00d
User Port 2 way & Off Position (Lead)	@ £33.00	£37.95d
User Port 6 way & Off Position (Lead)	@ £72.00	£82.80d
BBC/Master RGB 2 to 1 Switch	@ £20.20	£23.23
BBC/Master RS423 2 to 1 Switch	@ £20.20	£23.23
Serial to Parallel Converter	@ £50.00	£57.50d
Parallel to Serial Converter	@ £50.00	£57.50d

PHILIPS MONITORS & TV MONITORS inc. lead

Suitable for Archimedes, Master & BBC computers		
Philips 8833 Colour Monitor	@ £252.20	£290.03a
Philips AV7300 TV/Tuner for 8833	@ £65.00	£74.75b
Philips 1010 TV/Monitor Push Button	@ £228.00	£262.20a
Philips 1210 TV/Monitor Remote	@ £250.00	£287.50a
Philips Mono Monitors		P.O.A.

DISC DRIVE UNITS

3.5" & 5.25" Combined Unit inc. PSU	@ £190.00	£218.50a
3.5" Single Unit inc PSU	@ £100.00	£115.00b
3.5" Dual Unit inc. PSU	@ £170.00	£195.50a

GOVERNMENT & EDUCATION ORDERS WELCOME

HOW TO ORDER:

Enclose your cheque or P/Order made payable to CARE Electronics

ACCESS or VISA Credit Cards Welcome

Please allow 7 days for delivery

Please add carriage:

a = £10.35 b = £5.75 c = £1.15 d = £2.30



TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE

17 Burnley Road, London NW10 1ED Tel: 01-208 1177 Fax: 01-452 1500

305 Edgware Road, London W2 Tel: 01-723 0233 Telex: 922800

ARCHIMEDES

300 & 400 SERIES

Archimedes 305 Basic	£699(a)
Archimedes 310 Basic	£775(a)
Archimedes 310M Basic	£835(a)
Archimedes 410 Basic	£1,399(a)
Archimedes 440 Basic	£2,299(a)
Monochrome Monitor*	£50(a)
PC Emulator Software (when purchased with computer)	£60(d)
Colour Monitor*	£195(a)

*Monitor prices applicable only when purchased with the micro.

ADD-ONS

0.5Mb Ram upgrade kit (for 305)	£79(c)
2nd Floppy drive (for 305, 310 & 410)	£125(b)
Econet Module (with stn set disc)	£43(c)
Backplane for 2 podules	£39(b)
I/O Podule	£79(b)
20Mb Hard Disc + Podule	£499(a)
Acorn Rom podule	£59(c)
CC Rom Podule	£49(d)
Acorn Midi I/O card	£29(c)

More podules are expected in the coming weeks please telephone for latest updates

IEEE Interface Podule	£283(b)
Full implementation of IEEE std 488 1978 & supp. IEEE std 488A 1980. Full specification on request.	

SERIAL LINKS

Arc. to BBC Serial Link (Software for both Arc & BBC)	£25(c)
Arc. to PC/XT (Software for both Arc & PC)	£29(c)
Arc External Drive Adaptor	£25(d)

BOOKS: (no VAT)

Arc. Ref Manual	£29(b)
ARM Assy Lang Prog	£12(d)

SOFTWARE:

PC Emulator	£99(d)
-------------	--------

LANGUAGES:

ANSI C	£95(c)	ISO PASCAL	£95(c)
Prolog X	£199(b)	FORTAN 77	£95(c)
LISP	£199(b)	COMAL	POA

PROGRAMMERS TOOLS:

TWIN Editor	£29(d)
Arc. Toolkit Module	£33(d)
Software Dev T/Box	POA
Software Dev Debug T/box	POA

PRODUCTIVITY TOOLS:

Logistix (incl Spreadsheet, timesheet, d/base & Graphics)	£95(c)
--	--------

WORDPROCESSORS

First Word	£POA
Graphics Writer	£29(d)
View SKM31 (e)	£49(d)
InterWord (e)	£39(d)

DATABASES

Deltabase	£26(d)
Systems DeltaPlus	£60(d)
Alphabase	£41(d)
Viewstore SKM27 (e)	£52(d)

SPREADSHEET

Viewsheet SKM07 (e)	£52(d)
Intersheet (e)	£39(d)

GRAPHICS & ART

Gammplot	£30(d)
System Gammplus	£60(c)
Artisan	£32(d)
Interchart (e)	£25(d)

Special Offer

FREE £115 inc vat VOUCHER

with every Archimedes model 310, 410 and 440 purchased from us.

This voucher can be redeemed against any future purchase made from us.

Additionally we will offer discounts upto 10% on Archimedes software and upto 5% on Archimedes hardware stocked by us to all purchasers of Archimedes computers.

This is a limited period offer so do not miss your opportunity for a bargain not to be repeated.

ACCOUNTING SOFTWARE

Minerva's suite 5 Modules (ea)	£54(d)
Order Processing, SalesLedger, StockManager, Purchase Ledger & Nominal Ledger	

GAMES:

ZARCH	£17(d)
Minotaur	£11(d)
Software packages marked with (e) run under 6502 emulated mode.	

Please check on availability of some of the above packages

FILE STORE

Acorn's new file server system	
Filestore E01	£825(a)
Filestore E02	£699(a)
Full details on request	

ECONET ACCESSORIES

Econet Starter Kit	£85(b)	Econet Bridge	£174(b)
Econet Socket Set	£29(c)	Printer Server Rom	£41(d)
File Server Level II	£75(b)	10 Station Lead Set	£26(d)
Master FS Utility Disc £17.25(d)			

ECOLINK

Ecolink allows you to connect a PC/XT or AT to an econet network. Supplied complete with comprehensive manual, software and cable.

Full spec on request **£299(b)**

UPGRADE KITS

1.20S ROM	£15(d)	ADFS ROM	£26(d)
DNFS ROM	£19(d)	1770 DFS Kit	£43.50(d)
BASIC II ROM	£22.50(d)	Econet Kit	£55(d)

EPROMS/RAMS

2764-25	
27128-25 (12.5V Vpp)	
27128-25 (21.0V Vpp)	
6264LP-15	
27256	
27512	

All prices on application

MASTER SERIES

AMB15 Master 128K **£356(a)**
Includes free Educational/Fun software bundle from BBC Publications range (RRP £40) and a STARdataBASE package worth another £40.

AMC06 Turbo 65C102 Module	£95(b)
ADC08 512 processor	£185(b)

ADF10 Econet Module	£40(c)	Acorn Rom Cartridge	£13(d)
ADJ22 Ref Manual I	£14(c)	ADJ23 Ref Manual II	£14(c)
View User Guide	£8.50(d)	V/sheet User Guide	£8.50(d)
TRC2 2ROM		TRC4 4ROM Cartridge	£11(d)
Cartridge	£7.50(d)	Master Dust Cover	£4.75(d)
TRC32 32K RAM Cart.	£29(d)		

Acorn 32016 Co Processor	£949(a)
Acorn X25 Gateway	£2175(a)
Acorn IEEE Interface	£265(b)
Universal CoProc Adapter (incl DOS+ & GEM suite)	£69(b)

Send for detailed list of DOS software for 512

MASTER COMPACT

All Compact systems come complete with 128K of RAM, 640K 3.5" double sided drive and educational software. Additionally we include our Education/Fun software bundle to the package.

SYSTEM 1 Entry system	£310(a)
SYSTEM 2 with 12" Hi Res Mono Monitor	£365 (2xa)
SYSTEM 3 with 14" Med Res Col Monitor	£475 (2xa)

Compact 2nd Drive Kit	£95(c)
Serial Kit	£25(d)
TV Modulator	£26(c)
Mertec Adapter	£35(c)
(upgrades Compact to almost Master level)	
External Drive adapter Cable	£9(d)

Z88 PORTABLE MICRO

A lightweight compact micro that can be carried in a brief case. Software available for transferring data to BBC and PC systems.

Z88 Micro c/w rechargeable batteries	£239(a)
Mains Adaptor	£8.65(d)
NiCad Rechargeable Battery	£2(d)
32K RAM or Eprom Pack	£17.35(d)
128K Ram or Eprom Pack	£43.40(d)
Z88 BBC Link with software	£21.70(d)
Parallel Printer Cable	£24(d)
Serial Printer Cable	£8.65(d)

SANYO CRT 70

14" Hi Resolution RGB Monitor
£209

RRP £429 12 months Warranty

CANON PW1080 Printer

£199(a)

12 months Warranty

RAM/ROM EXPANSION

ATPL Board for Model B. Simple to instal, no soldering. Allows expansion to 15 Roms + 2*8K RAMS	£37(c)
ATPL Battery backup kit	£18(d)
ATPL Board for BBC+	£31(c)

Techno
Winche
compet
compati
switch
reliable
winches
provide
storage

Techno
supplied
provide
system.
display
director
indicate
if latter.

Larger

NE
for

5.25" D
744 40T S
745 40T D
746 80T S
747 80T D

FR


TECHNOMATIC

17 Burnley Road, London NW10 1ED Tel: 01-208 1177

TECHNOMATIC DISC DRIVES



TS 400

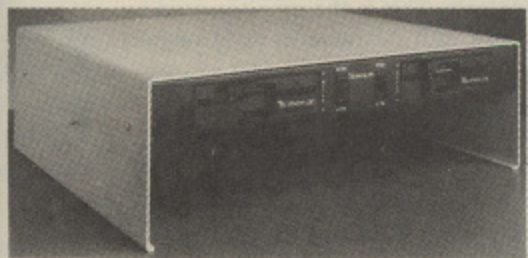

PD 800P

A range of high quality high performance drives to meet the needs of all BBC Micro Users.

All drives fitted with high quality, slim line Mitsubishi drive mechanism and necessary cables.

*All drives are fitted with high quality slim line ultra low power mechanisms capable of single and double density operation and offering fast track access and head setting times. Our confidence in their quality enables us to offer a **two year parts and labour warranty** on these mechanisms without any extra charge.

*5.25" floppy drives are fitted with 40/80 track switches as standard at no extra cost. The switches are located in the front and clearly marked to indicate the status at a glance.

*The mechanisms are set inside attractively styled, sturdy metal casings painted in BBC beige colour.

*All drives fitted with all necessary leads and are ready for operation on unpacking. The drives with the mains power supply are supplied with a mains lead fitted with a suitably fused 13A moulded plug.

*TECHNOMATIC drives stand out from other drives because of the high quality of construction and use of reliable switchmode power supply units on dual drives.

5.25" Single Drives 40/80 switchable:

TS400 400K/640K **£90(b)**

PS400 400K/640K with integral mains power supply **£104(b)**

5.25" Dual Drives 40/80 switchable:
TD800 800K/1280K **£170(a)**

PD800 800K/1280K with integral mains power supply **£190(a)**

PD800P 800K/1280K with integral mainspower supply and monitor stand **£209(a)**

3.5" 80T DS Drives:
TS351 single 400K/640K **£67(b)**

PS351 single 400K/640K with integral mains power supply **£85(b)**

TD352 Dual 800K/1280K **£126(b)**

PD352 Dual 800K/1280K with integral mains power supply **£149(b)**

Combo Drives (5.25" & 3.5" drives)
PD853 with integral psu **£165(a)**
PD853P with integral psu **£179(a)**

DISC DRIVE MULTIPLEXER
see page 5 of this ad for details

For Master, B, B+ and any DFS/ADFS
TDM2 Two computers/one drive unit **£65(b)**

TDM4 Four computers/one drive unit **£115(b)**

TECHNOMATIC WINCHESTERS

Technomatic offer the most popular range of Winchester drives for BBC micro systems at competitive prices. The drives are fully compatible with Acorn ADFS system. Fan cooled switch mode power supply ensure efficient and reliable operation. Combination of floppy and winchester drives in our elegant plinth housing provides an ideal solution for need to have large storage and ease of transferring data to floppies.

Technomatic front end utility for the Master supplied with the winchesters at no extra cost provides an easy and efficient file management system. The entire contents of the drive are displayed on the screen on boot up, each file or directory appearing as an icon. The icon type indicates whether directory or file and type of data if latter.

Larger capacity drives available on request.

P20HD TECHNOMATIC 20 Mbyte Winchester Drive **£429(a)**

P30HD 30Mb Winchester Drive **£449(a)**

P40HD TECHNOMATIC 40 Mbyte Winchester Drive with Acorn ADFS ROM **£749(a)**

P204HP TECHNOMATIC 20 Mbyte Winchester and a 80T DS floppy Drive built in a monitor stand. Includes ADFS Rom. **£609(a)**

P2041HT As P204HP but also with a 10 Mbyte tape streamer backup unit and backup utilities. Includes ADFS Rom. **£1179(a)**

TS10 10 Mbyte Tape Streamer Backup unit with utilities. **£599(a)**

TFC10 10 Mbyte Pre-formatted Cartridge for use with P2041HT and TS10. **£19(d)**

Technomatic Winchesters can be adapted to operate with the SJ Research FileServer by internal modification. However this must be specified at the time of ordering otherwise the drive has to be returned to us for modification.

Adaptor for SJ FileServer **£28**

WINCHESTER Drive Multiplexer
These units let you share a Winchester drive between a number of computers. Full details on request.

TWM2 for two computers. **£99 (b)**

TWM4 for four Computers. **£149 (b)**

NEW

Following the great success enjoyed by our P20HD unit, we are pleased to announce the launch of P30HD - a 30Mbyte hard drive. This drive is also supplied with the free front end utility for the Master. **£449(a)**

3M FLOPPY DISCS

5.25" Discs in packs of 10
744 40T SS DD **£8.00(d)**
745 40T DS DD **£9.75(d)**
746 80T SS DD **£12.00(d)**
747 80T DS DD **£12.75(d)**

3.5" Discs in packs of 10
80T SS DD **£13.50(d)**
80T DS DD **£15.00(d)**
(Add £1 for library case packing)



BULK DISCS

50 5.25" 40 T single sided discs with sleeves in lockable box. **£25(b)**

50 5.25" 80 T double sided discs with sleeves in lockable box. **£32(b)**

50 3.5" 80T double sided discs with sleeves in lockable box. **£60(b)**

FLOPPICLENE DRIVE HEAD CLEANING KIT

5.25" Kit with 20 disposable discs **£14.00(d)**
3.5" Kit with 20 disposable discs **£14.75(d)**

DISC STORAGE BOXES

DB340 Lockable 40 x 3.5" **£8.50(c)**

DB550 Lockable 50 x 5.25" **£6.50(c)**

DB570 Lockable 70 x 5.25" **£8.50(c)**

DB5100 Lockable 100 x 5.25" **£10.50(c)**

FREE Leatherbound Personal Organiser with every 50 3M discs

TECHNOMATIC

305 Edgware Road, London W2 Tel: 01-723 0233

PRINTERS

EPSON FX800	£295(a)
EPSON FX1000 £405(a)	EPSON EX800 £395(a)
EPSON EX1000	£539(a)
EPSON LQ1050	£529(a)
EPSON GQ3500 Laser Printer	£1290(a)
TAXAN KP815 £249(a)	TAXAN KP915 £350(a)
NATIONAL PANASONIC KXP1081	£149(a)
NATIONAL PANASONIC KXP1082*	£175(a)
STAR LC10	£209(a)
INTEGREX Multicolour Inkjet printer	£519(a)
BROTHER HR20	£349(a)
NAT PANASONIC KX P3131	£249(a)
includes massive buffer of 38K	
JUKI 6100 Daisy wheel printer	£295(a)
BBC/Master Parallel Lead (1.2m)	£5(d)
BBC/Master Parallel Lead (2m)	£7(d)
Compact Parallel Printer Lead (1.2m)	£9(d)
Archimedes Parallel Printer Lead (2m)	£9(d)
* Price includes Free Master printer lead and WYSIWYG + ROM	

EPSON LX800

Epson's latest budget printer offers a host of new features all utilising Epson's unrivalled knowhow of printer technology and reliability.

- ★ 180 cps draft/25cps NLQ ★ two modern fonts as std: Sans Serif and ROMAN. NLQ font selection from front panel ★ Tractor and friction feed
- ★ Single sheet guide with auto load switch. Original + 2 copies.
- ★ 3K input buffer with character downloading facility
- ★ Fully compatible with BBC & IBM graphics
- ★ Centronics interface as standard
- ★ Price including BBC master lead **£179(a)**

EPSON LQ500

Epson's budget 24pin letter quality printer provides unrivalled print quality with two built in letter quality fonts and widest repertoire of type styles at low cost. Sans Serif and Roman or draft font can be selected from the front panel as can print speeds with max resolution of 360x180 dpi. Friction and tractor as standard. Parallel interface. Designed for low noise operation 55dB(A). Introductory price incl. master lead **£329(a)**

EPSON LQ850

Epson's latest 24pin letter quality printer has been specifically designed for optimum paper handling convenience. Both single sheets and fanfold paper can be loaded simultaneously and a single lever enables the selection of either for printing. Micro adjust feature enables paper feed forward or reverse in increments as fine as 1/180" - ideal for form setting. Auto load of selected paper to printing position. Very fast printing speeds 264cps draft & 88cps LQ. Sans Serif & Roman LQ fonts can be selected from front panel as can the character pitch.

LQ850 has been specially insulated to keep the noise level down to 55db(A). Parallel & Serial interface as std.

Introductory Price including BBC Master lead **£419(a)**

MODEMS

MIRACLE WS4000 V21/23	£135(b)
MIRACLE WS3000 V21/23	£244(b)
MIRACLE WS3000 V22	£409(b)
MIRACLE WS3000 V22 bis	£537(b)
(All modems are BABT approved)	
BBC Data Cable for WS3000/4000	£10(d)
MIRACLE WS2000V21/23 & BELL stds	£92(c)

PLOTTERS

Hitachi 672XD A3 4 Colour HPGL	£465(a)
Plotmate A4S	£420(a)
Plotmate A3M	£640(a)
Roland 880 A3 Flat bed 8 col	£599(a)
Variety of Plotter pens and accessories in stock.	
Larger Plotters available. Please enquire.	

PRINTER SHARERS & BUFFERS

TSB256 Printer Sharer Buffer

Provides a massive buffer size of 256K and connects three computers to one printer. Autoswitching between computers. Facility to print copies. **£189(b)**

BUFFALO PB Buffer

Parallel buffer for internal fitting to most Epson printers. Simple to instal. **£89(c)**

PERIPHERAL & COMPUTER SHARERS

High quality switches to allow the user to switch between computers, printers, modems etc. Fully shielded metal cases, all lines fully switched.

	Parallel	Serial
2 Computers to 1 Printer 36v36-2	£25(c)	25v25-2 £25(c)
3 Computers to 1 Printer 36v36-3	£39(c)	25v25-3 £39(c)
4 Computers to 1 Printer 36v36-4	£45(c)	25v25-4 £45(c)
2 Computers 2 Printers		25v25-x £49(c)
X-over 36v37-x	£49(c)	
BBC Cable Set 3 to 1 (1m ea)	£24(c)	
BBC Cable Set 4 to 1 (1m ea)	£30(c)	

BBC Computer Sharer: TCS26

1 computer to 2 printers fitted with BBC cable **£21(c)**

Paper & Labels

Plain fanfold paper with microperforation:	
2000 sheets 9½ x 11"	£12 (£3.50)
2000 sheets 14½ x 11"	£18.50 (£4.50)
1500 sheets A4 90gsm	£18.00 (£4.00)

Labels/1000

Single Row 3½ x 17/16	£5(d)
Triple Row 27/16 x 17/16	£5(d)

PRINTER STAND

A new style printer stand with easy paper feed and paper separation, provides complete access to paper. Can be used with both top and bottom paper feed. Very space efficient. **£26 (b)**

PROGRAMMING ACCESSORIES/SOFTWARE

Compatible with B, B+ and Master	
EpromRyter (Epromer II)	£89(b)
EpromRyter is compatible with BBC Master only. See page 7.	
EPROMER II	£89(b)
META ASSEMBLER	£145(b)
PORTAL EPROM	
EMULATOR 512K	£245(b)
TEAM Disassembler	£145(b)
EPROM ERASERS	
UV1B 6 eproms, safety cutout	£47(b)
UVIT 6 eproms, timer, safety cutout	£59(b)

MONITORS

All Monitors supplied with a suitable lead.

12", 14" and 20" MONITORS

Microvitec 1431 Std Res, 14"	£179(a)
Microvitec 1431AP Std Res + PAL/Aud, 14"	£199(a)
Microvitec 1451 Med Res, 14"	£225(a)
Microvitec 1451AP Med Res + PAL/Aud, 14"	£255(a)
Microvitec 1441 Hi Res, 14"	£359(a)
Philips 14" RGB Med Res, 14", high contrast screen, TTL/Linear Input, Mono/Colour Switch Sound Input. Separate controls for brilliance and contrast. This is the monitor used by Acorn with Archimedes and Compact Computers. £195(a)	
Sanyo CRT 70 14" High Resolution Monitor £209(a)	
Resolution better than Microvitec 1441, suitable for Master, Archimedes.	
Microvitec 2030CS 20" Standard Resolution RGB/Comp Video £380(a)	
Microvitec 2040CS 20" High Resolution RGB/Comp Video £675(a)	
TAXAN SUPER VISION 620 12" Hi Res/Hi Contrast Option to switch to green/amber BBC/IBM Compatible £269(a)	
TAXAN SUPER VISION 625 12" Super Hi Res and contrast RGB Monitor with option to switch to mono BBC/IBM compatible. £319(a)	
TAXAN 770+ MultiSysnc Autoscan 14", ideal for utilising the hi res modes on Archimedes. Our price includes a tilt & swivel stand £499(a)	
NEC MultiSysnc II 14" Enhanced version of the original NEC MultiSysnc. complete with tilt & swivel base. Suitable for Archimedes and PC compatibles. £489(a)	

12" MONOCHROME MONITORS

PHILIPS BM 7502 Hi Res green screen	£69(a)
PHILIPS BM7522 Hi Res amber screen	£75(a)

TIME WARP

Real Time Clock, Plugs into the user port, battery back up as standard, includes manual, demo software including a diary/planner application program **£29(d)**

MONITOR ACCESSORIES

Microvitec Swivel Base (14" plastic monitors)	£17(c)
Monitor Stand Models B & B+	£10(c)
Monitor Stand Master	£13(c)
Double Tier Stand Models B, B+ or Master	£24(b)
Taxan RGB Lead	£7(d)
Microvitec Lead	£4(d)
Monochrome BNC/Phono Lead	£4(d)

TECHNOMATIC

17 Burnley Road, London NW10 1ED Tel: 01-208 1177

CAD/DRAWING PACKAGES

NOVACAD Cad Package for B, B & MASTER. (See page 5 for specification)	
Tracker Ball/Mouse Version (TM)	£49 (d)
TM Version plus Tracker Ball	£94 (d)
TM Version plus Mouse	£79 (d)
Plotter Driver Generator	£15 (d)
MOUSE	
AMX MOUSE with SUPER ART (psc specify B, B+ or Master)	£59 (d)
STOP PRESS (Pagemaker)	£32 (d)
EXTRA/EXTRA (utility for the Pagemaker)	£19 (d)
MAX	£17 (d)
STAND ALONE MOUSE	£34 (c)
RB2 TRACKER BALL RB2 Tracker Ball with Icon Master (for B, B+ & Master)	£59 (c)
RB2 Tracker Ball with Cursor Control Rom (for Master only)	£59 (c)
RB2 Tracker Ball 'Stand Alone' for use with NOVACAD & other software)	£47 (c)
Cursor Control Rom for Master	£12.50 (d)
MIRRORSOFT FLEET STREET EDITOR	£35 (d)

CP/M SOFTWARE

Please send for details on our range of CP/M software for Acorn/Torch Z80 2nd Processors

BBC SOFT/FIRMWARE

DATABASE MANAGEMENT SYSTEMS

VIEWSTORE	£37 (d)
STARdataBASE	£39 (d)
MASTERFILE II	£17 (d)
ACORN OVERVIEW PACKAGE Special Offer (RRP £86)	£69 (b)

WORD PROCESSORS

ACORN VIEW PROFESSIONAL (BBC)	£69 (c)
VIEW 2.1	£35 (d)
VIEW 3.0	£45 (c)
VIEW INDEX	£12 (d)
VIEW PRINTER DRIVER GENERATOR	£8 (d)
VIEWSPELL	£29 (d)
DOT PRINT PLUS	£28 (d)
WORDWISE	£24 (d)
WORDWISE PLUS	£38 (d)
WYSIWYG PLUS	£21 (d)
SPELLMASTER	£47 (d)
INTERWORD	£39 (d)
WORDEASE	£24 (d)
SPELLCHECK III	£31 (d)
EDWORD II	£43 (c)

SPREADSHEETS

VIEWSHEET	£37 (d)
WINDOMATIC (A Viewsheet Utility)	£15 (d)
VIEWPLOT	£22 (d)
INTERSHEET	£37 (d)
INTERCHART	£26 (d)
ULTRACALC	£26 (d)
MINI OFFICE II DISC Version For B & B+ 40T or 80T	£14.75 (d)
For Master 80T	£17.30 (d)
For Compact	£19 (d)
MINI OFFICE II ROM Version For Master, Compact, B+ & B	£48 (c)
MEGA 3Rom	£82(b)
CC's integrated package offering Interword, Intersheet & Interchart on one 128K ROM. For Master, Compact, B+ & B	

LANGUAGES

META ASSEMBLER	£145 (b)
TEAM DISASSEMBLER	£145 (b)
MACROM	£33 (d)
ACORN MICRO PROLOG	£62 (d)
ISO-PASCAL	£51 (c)
ISO-PASCAL STAND ALONE GENERATOR	£30 (d)
OXFORD PASCAL (40 or 80T) Specify B or B+	£36 (d)
OXFORD PASCAL for Master	£52 (d)
ACORN LOGO	£46 (c)
LOGOTRON LOGO	£55 (c)
BBC PUBLICATIONS OPEN LOGO	£59 (c)
ACORN LISP ROM	£39 (d)
ACORN FORTH ROM	£39 (d)
ACORN COMAL ROM	£39 (d)
MICROTEXT	£52 (c)
MICROTEXT PLUS	£229 (b)

COMMUNICATIONS

TERMULATOR	£25 (d)
COMMSTAR II	£28 (d)
MAYA Comms Package See next page for details	£49 (d)
MODEM MASTER	£11 (d)
COMMAND	£34 (d)
MASTER TERMULATOR	£34.75 (d)

UTILITIES

ACORN BASIC EDITOR	£24 (d)
MONITOR (BBC Pub)	£19 (d)
SLEUTH	£23 (d)
TOOLKIT PLUS	£31 (d)
TOOLBOX 2 (BBC Pub) Manual Cassette	£9.50 (d) £9 (d)
ACORN GXR GRAPHICS ROM specify B or B+	£24(d)
PRINTMASTER	£24 (d)
PRINTWISE	£24 (d)
DUMPMASER	£26 (d)
FONTWISE PLUS	£17 (d)
ADV TELETEXT UTILITIES ROM	£7.95 (d)

COMPACT (all on 3 1/2" disc)

ARTROOM	£27 (d)
FONTWISE +	£22 (d)
FONT EDITOR	£22 (d)
BETABASE	£27 (d)
WHITE KNIGHT MKII	£16 (d)

BBC PUBLICATIONS EDUCATIONAL SOFTWARE

A series of programs developed in many cases alongside Radio & TV programmes by BBC's Education Department which supplement the classroom studies by moving and colourful displays helping in clear understanding of a variety of subjects. Some packages also include audio cassettes.

PRIMARY EDUCATION

ASTRONOMY	£11 (d)
COMPUTERS AT WORK Aud/EC/disc	£16 (c)
PICTURE CRAFT	Disc £17 (d)
INTRODUCING GEOGRAPHY	Disc £16 (d)
MATHS WITH A STORY 1	Cass £8 (d)
MATHS WITH A STORY 2	Cass £8 (d)
NUMBER GAMES	Cass/EC £7.50 (d)
USING YOUR COMPUTER	Cass £24 (c)
THE HALL OF MIRRORS	Disc £13 (d)
MATHS	Disc + Aud Cass £17 (d)

SECONDARY LEARNING

TECHNOLOGY & DESIGN Pt1	£21.50 (c)
ELECTRIC FIELDS	£10.50 (d)
ADVANCED LEVEL	
STUDIES: STATISTICS	Disc £23 (d)
ADVANCED STUDIES:	
GEOGRAPHY	Disc £17 (d)
INSIDE INFORMATION	Prog Cass £10 (d)
	Book £8 (d) Audio Cass £5 (d)
OPEN LEARNING	
PACK	Disc/AudCass + book £36 (b)
SCIENCE TOPICS (ST)	
S.T.: WAVES	Disc £14 (d)
S.T.: RELATIONSHIPS	Disc £14 (d)
S.T.: BONDING	Disc £14 (d)
S.T.: ELECTROMAGNETIC SPECTRUM	(d)
S.T.: ELECTRONICS IN ACTION	Disc £14 (d)
S.T.: NEWTON & THE SHUTTLE	Disc £19 (d)
S.T.: ECOLOGY	Disc/EC £19 (d)
S.T.: POLYMERS	Disc/EC £19 (d)
S.T.: CLASSIFICATION & PERIODIC TABLE	Disc £20 (d)
S.T.: FOOD & POPULATION	Disc £20 (d)
SEC. SCIENCE	
MICROTECHNOLOGY	Cass £7 (d)
SEC. SCIENCE: THE	
MOLE CONCEPT	Disc/Aud/EC £16 (c)
BIRD SPY	Disc £13 (d)
GEORDIE Racer	Disc £13 (d)

GENERAL

VU-TYPE PROFESSIONAL	Disc £19 (d)
WHITE KNIGHT MK II (for 1770 DFS)	Disc £16 (d)
BATTLEFIELDS	Cass £8.50 (d)
A VOUS LA FRANCE	Disc £20 (d)
	Book £5.25 (d) Aud Cass(2) £7 (d)
ESPANA VIVA	Disc £19 (d)
	Audio Cass(2) £8 (d) Book £6.95 (d)
	(2) £7.50 (a)
DEUTSCH DIREKT	Disc/aud/EC £16 (c)
	Book £5.95 (d)
BLACK QUEEN A long awaited bridge game. (1770DFS)	£13 (d)
BISMARCK History of the famous battleship. (1770DFS)	£13 (d)

£179(a)

£199(a)

£225(a)

£255(a)

£359(a)

£195(a)

£209(a)

£380(a)

£675(a)

£269(a)

£319(a)

£499(a)

£489(a)

£69(a)

£75(a)

£17(c)

£10(c)

£13(c)

£24(b)

£7(d)

£4(d)

£4(d)

£17(c)

£10(c)

£13(c)

£24(b)

£7(d)

£4(d)

£4(d)

£17(c)

£10(c)

£13(c)

£24(b)

£7(d)

£4(d)

£4(d)

BOOKS

No VAT Carriage Code (c)

LANGUAGES	
6502 Assy Lang Prog.....	£19.95
6502 Programming.....	£13.95
8086 Book.....	£23.95
Acorn BCPI User Guide.....	£15.00
Acorn FORTH.....	£7.50
Acorn LISP.....	£7.50
Acorn ISO Pascal Ref Manual.....	£10.00
Intro to COMAL.....	£10.00
Intro to LOGO.....	£7.50
Micro Prolog Ref Manual.....	£10.00
Introduction to Turbo Pascal.....	£14.95
Prog the Micro with Pascal.....	£8.50
The Supervisor's BBC Micro.....	£10.95

BBC MICRO GUIDE BOOKS

Inside Information.....	£8.95
Maths Prog in BBC Basic.....	£7.95
The Friendly Computer Book.....	£4.50
Toolbox 2.....	£10.95

ARCHIMEDES

Archimedes Reference Manual.....	£29.95(b)
ARM Assembly Language Prog.....	£12.95(b)

PROGRAMMING/UTILITY

Advanced Sideways Ram User Guide.....	£9.95
Advanced User Guide (BBC).....	£15.95
Applied Assembly Language on the BBC.....	£9.95
BBC Micro Advance Programming.....	£9.95
BBC Micro Ref Guide (B Smith).....	£10.95
BBC Micro Sideways ROM's RAM's.....	£9.95
Guide to the BBC Rom.....	£9.95
Beginners Guide to W.P.....	£7.95
Mastering Assembly Code.....	£8.95
Mastering Interpreters & Compilers.....	£14.95
Master Operating System.....	£12.95
Mastering View, Viewsheets & Viewstore.....	£12.95
View by B. Smith.....	£12.95
View 3.0 User Guide.....	£9.00
Viewstore User Guide.....	£9.00
Viewsheets User Guide.....	£9.00
Wordwise Plus.....	£9.95

SOUND & GRAPHICS

Computer Graphics & CAD Fundamentals.....	£9.95
Mastering Music.....	£6.95

DISC DRIVE SYSTEMS

Advanced Disc User Guide.....	£16.95
Disc Book.....	£3.50
Disc Programming Techniques.....	£7.95
Disc Systems.....	£6.95
File Handling on the BBC.....	£6.95
Discovering Disc Drives.....	£POA
Practical Disc File Techniques.....	£5.95
Mastering the Disc Drive.....	£12.95
Mastering DOS plus.....	£12.95

APPLICATIONS

Interfacing Proj for BBC.....	£6.95
BBC and Small Business.....	£5.75
The Software Business.....	£5.50

Mastering Operating System

(David Atherton) £6.95

WYSIWYG PLUS

WYSIWYG PLUS is a printer and screen utility for Wordwise Plus, View, Interword, and Basic users, supplied on a 16K Eprom. To obtain a particular printer effect, such as enlarged text, it used to be necessary to discover the appropriate 'printer control code' from your manual and incorporate it into your text. Secondly, you had to print several trial copies in order to position the effect correctly in relation to the rest of your text.

WYSIWYG PLUS simplifies this trial and error approach using easily remembered *commands. For example, *ENLARGED not only selects enlarged text on your printer, but uniquely shows you double width characters on your screen, even from within Wordwise Plus!

WYSIWYG PLUS incorporates a logo editor. Just draw your design on screen using the arrow keys, and save the results. Use the *GRAPHICS command to incorporate your design anywhere in your text; position and see your design in your text before faithfully reproducing a hard copy.

There is also special help for daisy wheel users. The *WHEEL command will prompt you to change daisy wheels whenever a change in type style is about to occur.

WYSIWYG PLUS is designed to work with the following systems:

BBC Model B	6502 Second Processor,	BBC Master 128	All printers (Except lasers)
BBC Model B+	Turbo coprocessor	BBC Compact	

WYSIWYG PLUS workspace is relocatable.

MAYA TERMINAL EMULATOR

A comms package for the professional user. MAYA emulates DEC VT52, VT100 and Tandberg TDV2215. Special BBC VDU mode allows full access to the BBC VDU driver.

Menu driven software allows the setting up of parameters and function key definitions which can be saved to disc for future use.

Flexible command parser provides a uniform user interface and allows full access to * commands and HELP facilities.

Xmodem and Kermit file transfer protocols are included as standard. Unique feature of MAYA is that Kermit can also be used in 'remote mode', which allows file transfers to be initiated by other computers connected to the BBC. File transfers can also be done with a 'dumb' ASCII protocol. Open architecture allows for expansion and addition of new features. Options currently under development are graphics drivers for Tektronix 4010/4014 emulation, TDGR driver for TDV2215 and a Viewdata patch (provisional version included in the current issue). Registered users will be provided with regular updates and customisation service will also be available to those interested.

The package comprises of a rom, utils disc and a comprehensive manual. It is compatible with Master, Models B & B+. It supports DFS, ADFS, NFS and ANFS filing systems.

BLACK QUEEN

A contract bridge program from BBC Publications both for beginners and for club players. Features include rebid and/or reply of any deal just played. Deals can be saved to a disc. Unique feature of Black Queen is its ability to construct deals from standard or classic ones in newspapers etc.

Compatible with Master, B and B+ **£13(d)**

EDUCATIONAL/FUN SOFTWARE BUNDLE

Wordmover
Wordplay
Pantry Antics
Drawstick
Locomotion

These programs are supplied from the BBC Publications Educational Software range and will be supplied on a 5.25" disc for BBC Master, B+ and B and on a 3.5" disc for the Compact.

5.25" Disc **£17.50(d)**

3.5" Disc **£18.50(d)**

(Normal RRP over £40)

VU-TYPE

Do you have finger trouble when typing?
Do your letters look like this?

Dear Sor,
I would like to...
then you need:

VU-type, a complete touch typing program produced by BBC/Pitman.

It allows you to learn at your own pace and has a wide range of exercises. Screen displays show the keys you have pressed and it will report on your speed and accuracy.

Supplied on a 40T Disc with a manual.
Available at a special price of **£7.50(d)** instead of the usual £15. Offer valid while stocks last.

BISMARCK

An enthralling game of strategy involving the famous German battleship of the same name.

You can play the role of British Navy in its quest to find the Bismarck and sink it or take either British or German role against another player. It requires the highest qualities of judgement, observation and decision to plan strategy and tactics to plot the death of Bismarck. **£13(d)**

PRINTER ACCESSORIES

EPSON ACCESSORIES:

Interfaces	
8143 RS232.....	£30 (d)
8148 + RS232 + 8k.....	£65 (d)
8177P NLQ for FX80 +/FX100 +.....	£99 (d)
Parallel & Serial Buffers of various size also available.	
LQ800 Tractor Feed.....	£47 (b)
LQ1000 Tractor Feed.....	£52 (b)
SHEET FEEDERS:	
LQ800.....	£135 (b)
LQ1000.....	£179 (b)
EX800.....	£135 (b)
EX1000.....	£309 (b)
FX800.....	£135 (b)

FX1000.....	£179 (b)
Ribbons:	
RX/FX100/100 +, FX105.....	£7 (d)
RX/FX80/80 +, FX85.....	£4 (d)
LX80/LX800.....	£4.50 (d)
LQ800.....	£8.50 (d)
LQ1000.....	£10 (d)
EX800/1000.....	£7.50 (d)
H180 Pen Set (Aqueous/Ball point).....	£8.25 (d)
HITACHI 672 Plotter	
Aqueous Pen Set six pens.....	£18.50 (d)
Oil Based Pen Set six pens.....	£25.00 (d)
TAXAN CANON Accessories:	
Ribbon, KP819/815/910/915.....	£6 (d)

Star Printer	
NL10 Sheet Feeder.....	£52 (b)
NL10 Ribbon.....	£4.50 (d)
National Panasonic KX P1080/81	
Spare Ribbon.....	£4.50 (d)
KXP3131 Tractor.....	£90 (a)
KXP3131 Sheet Feeder.....	£189 (a)
JUKI 6100	
Tractor Feed.....	£149 (a)
Ribbon (Carbon).....	£2.00 (d)
Sheet Feeder.....	£219 (a)
BROTHER HR20	
Tractor Feed.....	£116 (a)
Spare Ribbon Nylon.....	£3.00 (d)
Spare Ribbon Carbon.....	£4.50 (d)

INTEGREX INK JET COLOUR PRINTER

Spare Ink Cartridge Black.....	£9 (d)
Spare Ink Cartridge Colour.....	£15 (d)
Paper Roll.....	£7 (d)
Printer Leads:	
BBC Parallel Lead (1.2m).....	£6 (d)
PAPER & LABELS	
Plain Fanfold paper with micro perforations:	
2000 sheets 9½" × 11" 60 gsm/sq m.....	£12 (£3.50)
2000 sheets 14½" × 11" 60 gsm/sq m.....	£18.50 (£4.50)
1500 sheets A4 90 gsm.....	£18 (£3.50)
Labels/1000:	
Single Row 3½" × 1½".....	£5.25 (d)
Triple Row 2½" × 1½".....	£5 (d)

TECHNOMATIC
MAILORDER & RETAIL
17 Burnley Road
London NW10 1ED
Fax: 01-452 1500
Telex: 922800

RETAIL SHOPS
15/17 Burnley Road, London NW10 1ED
Tel: 01-208 1177 Telex: 922800
(close to Dollis Hill) ↔
West End Branch
305 Edgware Road, London W2
Tel: 01-723 0233, 01-402 0444
(near Edgware Road) ↔

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card


Orders welcome from
government depts &
educational establishments

All prices ex VAT.
Prices are subject to
change without notice
Please add carriage
(a) £8.00 (Courier)
(b) £2.50
(c) £1.50
(d) £1.00

NOVACAD Computer Aided Draughting System

*Novacad can drive a plotter to produce drawings of highest quality...
Novacad is excellent. It is flexible, genuinely easy to operate
without much practice, and a pleasure to use.* Beebug Dec 86

A sophisticated CAD package with unique facilities. Thousands of Novacad packages are being used in widely differing fields ranging from industries for producing engineering drawings to accountants offices for producing flow charts. Architects, engineers, plumbers, kitchen planners and many other professions requiring easy to use facilities for producing high quality output are making extensive use of Novacad's unique features. Novacad is proving to be an invaluable teaching aid in technical schools simply because of the ease with which it can be used.

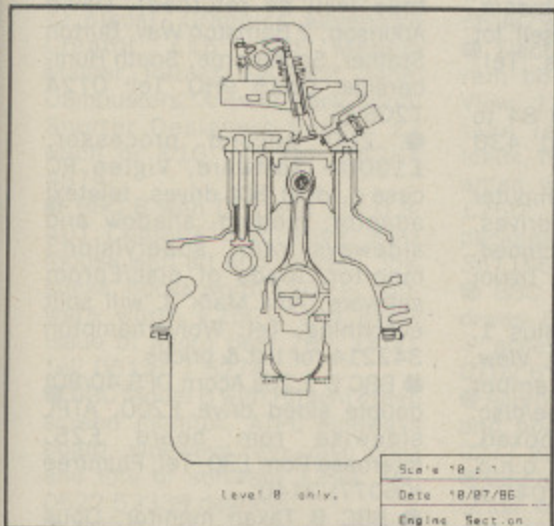

Novacad is compatible with all models fitted with Acorn DFS. Hardware requirements can be minimum; single drive and FX80 compatible printer are enough to get started, though its performance is enhanced considerably by use of 6502 2nd processor, dual drive and to a degree with B+ and Master's shadow ram.

The major features offered are:

- ★ Simple and easy to use with logical command sequence.
- ★ A large drawing area (approx 15 screens)
- ★ Unique ability to create complex icons made up of upto 500 lines instead of the usual 15 to 20 pixels, store them in a library and recall them at different scales and orientations.
- ★ Zoom facility.
- ★ Create multi level drawings.
- ★ Text entry at any 90° orientation anywhere on the screen.
- ★ Grid scaling and locking, displacement measurements.
- ★ Printer routine for FX80/100 compatible printers
- ★ Cursor control from keyboard/tracker ball/mouse.

Plotter driver generator available as an optional utility, configures a routine for any BBC compatible plotter. Pre configured routines for popular plotters like Epson HI80, Hitachi, Plotmate are included. Drawings can be scaled to maximum plotter size.

NOVACAD T/M Version **£49(d)**
NOVACAD T/M + Plotter DG **£61(c)**
Plotter Driver Generator **£15(d)**

£49(d) Plotter Driver
Generator **£15(d)**

EpromRyter

- *Highly sophisticated & Advanced Programmer
- *All current single rail eproms handled
- *State of the Art Programming Algorithms

EpromRyter is a powerful eprom programmer designed for use with the BBC Master Computer. It takes full advantage of the latest developments in the eprom technology and the extra facilities on the Master to provide fast, simple and efficient programming and editing facilities.

The software is totally menu driven and on screen help messages make the programming simple for both specialists and novices alike.

The EPROMRYTER interfaces with the Master through 1MHz bus. It is mains powered with its own psu. 3M Textool zif socket has been fitted to ensure consistent and reliable service over long periods.

META Version III


"All the good features you would expect to find in a good source code editor are present ... Meta assembler lives in a different world. It is structured to work with any new processor ... as new instruction sets can be added ... as needed ... has a well featured editor with colour highlighting, a sound modular approach." Acorn User October 1986

- Assembles for over 30 popular processors, including Z80, 6800/01/02/04/05/09/11 etc - and 68000 - using native mnemonics for each processor, eg LD A, (HL) for Z80 and MOV A0, \$1000 for 68000 etc.
- Fully integrated Editor: four field, all search, search/replace, block copy, delete, move, marked save, load etc.
- Compatible with Portal Eprom Emulators and Team Disassembler.
- Send object code in Intel Hex, S-Record, straight binary etc. down to discs, RS232, parallel port, Eprom Emulators etc - all **during Assembly.**
- Over 50 directives included as standard: handling nestable macros, conditional assembly and twenty types of table definition directives.
- 32 bit labels; 31 character names. Arithmetic and Boolean arithmetic to 32 bits.
- Modular source code with numeric and string parameter passing.
- Serial communicator area with eight options lines: echo, control code trap, LF suppression/addition etc.
- Over 500 in use throughout the world in universities and many different industries.
- Two 16K Roms, two 80 track discs, A4 ring-bound manual, function-key strip.

The single rail eproms handled by the EpromRyter are:

- 2716 2732 2764 27128 27256 27512 27513 27011 2516 2532 2564 (NMOS & CMOS)
- One time eproms P27XXX, 87CXXX etc.
- Also A suffix eproms such as 27XXXXA

£89(b) + VAT

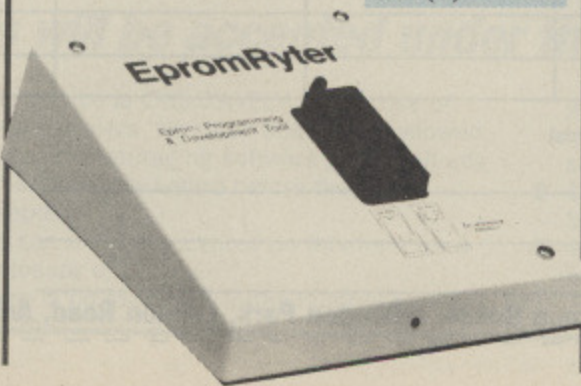

EPROMER II

A proven Eprom programmer for BBC Model B and B+ with thousands in use in industry, educational and R&D establishments. It offers many of the powerful features of the EpromRyter and can program all single rail eproms upto 27256. Full details on request. **£89(b)**

PORTAL EPROM EMULATORS

- Emulates 2716, 2732, 2764, 27128, 27256, 27512 eproms at 150ns Access time.
 - Load at 4Kbytes/second - No "erase" time.
 - 28 pin header plugs into Eprom socket on target system - status monitored on 13 Leds.
 - Fully software controlled from Meta Assembler.
 - 100 times faster than standard EPROM program/erase cycle.
 - Fully CMOS compatible; draws no power from target system.
 - Four portals may be independently programmed off same user-port cable.
 - Complete with all cables, manual and disc.
- PORTAL 512** (2716, 2732, 2764, 27128, 27256, 27512).

TEAM DISASSEMBLER

The third part of the Universal Development System: a Meta labelling disassembler.

Supports 1802, 8080, 8085, #HD64180, Z80, 65XX (includes 65 col, 6511 etc), 68XX (includes 00, 01, 02, 03, 08 etc):

- Up to 64K of object code translated back into META compatible source code modules: labels automatically inserted on all jump targets, memory references etc.
- Pre-editing stage allows marking of object code areas as byte, string, word, long word etc, tables. These areas disassembled into appropriate directives instead of garbage mnemonics.
- Reconstituted source code ready for immediate re-assembly by META.
- Omniversal search/replace for re-naming arbitrary label names with meaningful ones.

This advertisement can only show an example of the range of products stocked by Technomatic. So send for our latest BBC catalogue providing detailed information and prices on BBC Computer Systems, Peripherals, Software and Books. To obtain your free copy please complete and return the coupon below.

Technomatic is a BBC Computer and Econet Referral Centre providing a professional and reliable service to the BBC user.

NAME

ADDRESS

.....Post Code

Return to Technomatic Ltd, 17 Burnley Road, London NW10 1ED

MICRO USER CLASSIFIEDS

- LVL Echo keyboard with rom £45. Wanted 512 co-processor. Tel: 0782 395900.
- BBC Model B, hi-res monitor, rom board, plus much software. Must sell £300. Tel: Paul 0480 61244.
- Cumana 40T disc drive £40. Crawley, Sussex. Tel: 0293 25842.
- Master 128 plus View packages, Pascal, BCPL, Logo and more £350. Opus twin, double sided 5.25 40-80 drive £150. Microvitec medium resolution RGB-TTL monitor £150. 80186 co-processor, mouse, software £125. Z80 second processor software £125. 6502 second processor and software £100. Lots of software & roms to go. Tel: Medway (0634) 376170. £850 the lot.
- BBC B 40/80tk DS disc drive, rom board, 16k ram etc. Over £350 games and serious software £700 o.n.o. Tel: 01 947 8831.
- Torch Z80 second processor complete with perfect software, CP/M, 64k ram and manuals £100 o.n.o. Tel: Mark (0206) 48755.
- Solidisk 4MHZ 256k as new only £70. Elite (disc) £6. Old Acornsoft tapes £2. Tel: Dave (0943) 463916.
- Torch Z80 2nd processor, 64k ram for BBC B with twin 80T-DS drives, BBC basic software and perfect software wp data filing and spreadsheet £150. Tel: 0244 26244.
- BBC issue 7 dual 80T dsdd drive colour Microvitec monitor. Epson RX80 printer, business software £550. Tel: 061 766 6945 (evenings).
- B+128 £250, Opus 40/80T switchable twin drives £100. LX86 printer and tractor £150.
- Magic modem and rom £50. Various roms, discs, tapes, books, music system. Call for details. Tel: Camberley (Surrey) 0276 29962.
- Torch ZEP100 Z80 processor perfect suite Wordstar £95. View 2.1 £20. Tel: 01 949 6817.
- BBC B, Watford rom ram, 128k board all options, disc drive, Acorn Teletext adaptor, Microvitec cub 1451 med-res monitor, tape recorder, lots of software, many roms, joysticks, books and magazines £650 the lot. Tel: 01 761 3407.
- Boxed Viglen single disc drive, single sided 40/80 track switchable £90 o.n.o. Tel: 091 2762382 after 6pm.
- Model B o.s.1.2 basic 2 as new. Offers. Large range of books, cassette software and numerous magazines - A&B, Acorn User and Micro User back to issue 1 phone for list. Tel: 021 308 1354.
- Games discs: Raven Skull, Strykers Run, Thrust all £7 each. Paper Boy £8. Tapes - White Knight £2, Konamis Coin-op Hits £5. Utility speech £7. Tel: 0904 424441 ask for Mark Wild.
- Printer Epson 80, Roms, View, Viewstore, Viewsheet, Watford, Rom Board, Mini Office, Word Aid, Transfer Rom, Watford DFS half list price. Tel: Tom 021 453 5669.
- For sale Master 128 £300 o.n.o. Acorn Teletext £75. Morley Teletext £75. MX80 printer £70. Zenith b&w monitor £60. 512 processor £200. Ds dd + psu drive £80. Tel: 0603 812338.
- Amx Pagemaker £30. Amx mouse and paintpot £30. Masterfile II £12. Viewstore £25. Viewsheet wanted. Tel: 0736 63918.
- Prism modem 2000 with software and information £25. Tel: 0274 637482 ask for Paul.
- Pace 40T s/s 5.25 disc drive £50. Tel: Congleton 277141.
- Boxed Gxr rom/book for BBC micro £13.50. Micro User, Acorn User magazines 84-87 offers! Tel: 01 579 0607.
- Watford DDFS - all complete except for 74LSR3 chip (needed for my 1770 interface) includes manual and fitting instructions OS 1.53 approx 6 months old £35 o.n.o. Tel: 0293 545620 (Paul).
- First four volumes (48 issues) The Micro User in official binders, excellent condition. Will sell lot only £30 buyer collects. Tel: Southport (0704) 25186.
- Micro User Library Feb 84 to Mar 88 offers. Tel: 061 430 4598.
- Osbourne portable computer (64k). DDFS, twin disc drives, software and manuals included. Bargain at only £100. Tel: Trevor (0406) 380621.
- Acorn Electron 96k, plus 1, plus 3, second processor, View, Hibasic, Philips hi-res amber monitor, software on tape/disc, manuals, magazines, boxed, excellent condition £450 o.n.o. Tel: Chris, Horsham (0403) 64192.
- Master Compact 640k drive terminal emulator RS232 port b/w 9" monitor, bundled software hardly used £349 o.n.o. Tel: 0273 813867 evenings.
- BBC issue 7 dual 80/40 drives, printer, pc-consult, rom cartridge system, teletext, sideways ram, mouse, speech lots of discs, tapes, magazines and books £800. Tel: 01 482 3609.
- BBC B cassettes from Bone Cruncher to Elite prices from £1 to £7. Tel: John 01 597 4658 evenings.
- BBC B not working for repair or spares, details. Tel: David 0533 717394.
- Tape to disc problems solved. If you are having any backup problems ring me. Tel: 02572 65912.
- BBC B Issue 7, ADFS, 20k expansion, green monitor, twin discs SSSD, d.matrix printer, Amx mouse, view, joysticks, manuals etc. £425. Tel: 01 907 3150.
- Eprom programming service to supply and program Eprom £7. To program your blank Eprom £3.25. Please send your image on disc or tape (will be returned). David Atkinson, 2 Barnston Way, Burton Stather, Scunthorpe, South Humberside, DN15 9HQ. Tel: 0724 720675.
- Z80 second processor, £1000+ software, Viglen PC case+, dual 80t drives, teletext adaptor, modem, shadow and sideways ram, supervision3 monitor, loads of disc/Eprom software, Amx Mark 3, will split everything. Tel: Wolverhampton 342214 for list & prices.
- BBC B 1.2os Acorn DFS 40/80t double sided drive £200. ATPL sideways rom board £25. Interbase Rom £30. Tel: Plumtree (06077) 2140.
- BBC B Taxan monitor, Opus DDOS, View, daisywheel printer, quickcalc and games. All for £350. Tel: 01 852 3872.
- Do you require a modem for your BBC? Well I have a Prism modem 1000 with all leads. Imaculate condition, will sell for £25 or might swap cost £35 new. Tel: Billingham (0526) 860004 after 5pm.
- BBC B Issue 7, 40t single sided drive Wordwise, Toolkit, Communicator roms, manual, books and software including Elite, Citadel £300 only. Tel: 01 699 5087.

PLEASE PRINT THIS AD IN THE NEXT MICRO USER

Cheque enclosed for £ _____ (minimum £2 for 10 words)

Name _____

Address _____

I certify that any software offered for sale is original and not a copy

Signed _____

POST TO: Micro User Classifieds, Europa House, Adlington Park, London Road, Adlington, Macclesfield SK10 4NP.

**Has upgrading your BBC
Micro given you hardware
you no longer need? Or have
changing interests left you
with unwanted software?
Then THIS is the place**

**to advertise your surplus
items.
Our 179,000 readers are
always on the lookout for a
bargain and this is the first
place they'll look!**

An added bonus!
Your advert will be
automatically displayed
on MicroLink, the
electronic mail service
operated in association
with Telecom Gold. This
means it will be seen by
thousands of computer
enthusiasts who can send
an instant response.

● BBC B original bargains, 40/80 disc: Elite, Snooker, £5 each. Tape: Aviator, Scrabble, £5 each. Atic-Atac, Sabre Wulf, Countdown, £3 each. Watford disc executor, Clares Replica II, tape-to-disc £3 each, twin - joysticks £8. Tel: 06284 4874.

● BBC B original bargains. Discs: Printwise (latest), Amx Xtra-Xtra (2 discs), Graphics Adventure Creator, £15 each. Modem Master, Pazazz, £8 each. Tape: Dambusters, Answer Back Sport, Snorter Designers Pencil, £3 each or £10 lot. Tel: 06284 4874.

● BBC B with DFS and 1.2 O.S. 40T Cumana disc drive, Amx mouse with art and utilities. Joysticks, books worth £100+, software worth £250+ and every issue of Micro User 70+ £400. Tel: 051 677 5274.

● BBC Model B with Hitachi green screen monitor, ATPL sideways board, sideways ram, disc drive and lots of software £399. Tel: 0622 52339 daytime.

● BBC B, Issue-7, Watford DFS, Solidisk 2MHz 128 Rom/Ram board, Watford 40/80 switchable double sided drive, joystick, manuals, utilities and many games on disc and tape £450. Philips 8533 colour monitor £200. Tel: Chris on (0206) 563938.

● Master 128, BBC green Hi-Res monitor, pair Cumana 40T SS drives, 30 blank diskettes, Viewstore, Ultracalc, joysticks, all manuals, boxes, as new £675. Tel: Weybridge 857476.

● BBC B Issue 7 Opus DS disc drive. Opus DDOS disc interface, data recorder, joystick, manuals £250+ software, perfect condition, boxed £330. Tel: 01 531 6062.

● BBC B 1.2 O.S., Watford DFS and 40/80T D.S drive, Microvitec colour monitor, Star SG10 printer, Amx mouse, extensive software including Amx Superart, Mini Office II £500. Tel: 0400 50554.

● Information Rom image. 24k compressed text £10. Specify 40/80tk disc. Dave Trounce, 20 Maplewood, Stafford, ST17 4SG.

● BBC B, Issue 7, DFS, Acorn speech cassette, music 500, various software. Tel: 01 529 0035 evenings. £280 o.n.o.

● BBC Model B, rom board, some roms, disc drive, RS232 interface £300. Also Miracle Technology WS400 modem with memory. Tel: Mike 021 353 0509.

● Acorn rom cartridge for sale

£7. "Typeasy" typing course for Acorn BBC B and Master computers £11. Tel: 01 952 7244.

● Torch Z80, software, manuals, offers. Wanted 6502 processor. Tel: 0242 41541.

● BBC B with Torch disc pack, Perfect Software, DBase II, Wordstar, monitor stands, software, £600 o.n.o. Tel: 0908 669879.

● Electron, Plus 1, 64k master ram board, books, 40 mags, View, 120 games (all originals), tape recorder, all necessary leads, manuals. Still under guarantee worth £640, will sell for £250. All boxed. The perfect package. Tel: Mr Starkey 0723 361166 evenings only.

● BBC B + DFS + twin 40/80 drives. Disc/Rom software. Boxed + accessories £500 o.n.o. Tel: 0702 611448.

● Acorn Z80 2nd processor, discs and booklets £110 o.n.o. Tel: 0277 821620.

● RH Lightpen plus software £20. Sside 40t drive £30, Dside 40t £35. ADT Rom with manual £17. Tel: 0482 640539.

● Pace 40T SS disc drive £70. Tel: 0532 668328 evenings.

● BBC Master 512k complete with Dos+, Mouse, Gem software and dual 40/80T double sided disc drives £475. Tel: Crewe (0270) 583860 (evenings).

● BBC B Issue 7 32k, Solidisk DFS 40T dual disc drives, manuals inc Adv User Guide, Mini Office II software £300. Tel: 01 550 3525 evenings.

● Master 128 boxed complete, 3 Rom cartridges, manual part one, twin joystick £300. Music 500 £30. Eprom Blower £30. Tel: Wakefield (0924) 366503.

● BBC B OS 1.2. Cumana 40/80 twin d/s disc drive, Acorn ADFS, teletext adaptor. Watford rom board, Disc Doctor, Replay, 18" col monitor, software and books

galore incl Mini Office II, Elite, Citadel etc etc. All in £550. Tel: Lewdown 237.

● Opus 40T d/dd £100. Acorn Data Recorder £20. Boxed as new. Tel: 0625 872234.

● B+128, dual disc drives, Turbo second processor, Amx Mouse, software on roms and discs worth £1800 sell £600 o.n.o. Tel: Harpenden 05827 3911 may split.

● Electron, Plus 1, View, Viewsheets, some games, magazines, good condition £99. Tel: Reading (0734) 62687 evenings.

● BBC B with Watford DFS 128k Rom/Ram card, joystick, Mitsubishi CD800 dual drive, Zenith green screen monitor. Tel: Watford 779719 after 6pm.

● BBC Model B with cassette recorder in original boxes, software, joystick, magazines included £200 o.n.o. Tel: 01 907 4954.

● Voltmace joysticks £10, Transferom £16, Cumana Touchpad £18, Micro Users, lockable 120 5.25 box £10. Tel: Anish 021 358 7271.

● Master reference manuals £6 each. Acorn Rom cartridge £5. Mini Office ADFS £7, Knitwear Designer £5, Pace single 40/80 DSDD drive £50, many games on disc. Tel: 0536 724981.

● BBC Master 128 as new with manuals and disc software, also help to get going if needed £320. Tel: 04955 51996 evenings.

● Twin Opus 80T D/S drives £120. Opus disc interface (1770) with DFS £30. Nightingale and Comstar II £60. Sideways plus rom board £10. Watford DDFS+ £10, Timewarp £10. (All above with manuals). Viglen case (for B's) c/w extension rom socket £20. Master metal double bridge (new) £25. Tel: 02814 5332.

● BBC B Issue 7, O.S. 1.2 + cassette recorder + joystick +

joystick interface + Acorn speech synthesiser fitted + £39.95 utility eptom + leads + top programs. Mini Office, Monopoly, Trivial Pursuit £299. Tel: 021 326 8002 after 4pm. Buyer collects, Birmingham.

● Electron, Plus 1, AP4, AP5, 40T disc drive, manuals, software, magazines £250. Solidisk 32k SWR, manual and software £20. Romas assembler with manual £10. Vine micros master replay £25. Tel: 09252 3171 or MAG-11621.

● BBC B 1770/8271 interface DFS/ADFS. Solidisk 2MHz 128k SWR 40T S/S drive £300. Tel: 091 581 9989.

● Wanted! BBC micro users to start group. Southend area. Tel: 0702 611794 for details.

● Acorn Z80 2nd processor in good condition with all manuals and software. (Cobol/Forms-2 etc) £150. Tel: 0274 604571.

● BBC B. Acorn DFS. ATPL sideways with 48k sideways Ram. Replay, Genie, Amx mouse, twin 40/80T double sided drives. Music 500 synthesiser, joysticks, loads of roms, software, magazines, books. Bargain £500 o.n.o. Tel: 061 437 9918 evenings.

● Torch Z80 second processor plus software £150. Tel: 0274 544409.


● Discs: Adventure Creator £15, Studio Eight £15. Tapes: Colossal Adventure, Belbase, Mini Office, Design £2 each. Games £1 each. 30 Hour Basic £2. Micro User December 1983 to October 1987. Beebug 1.9 to 6.8 complete. Offers? Tel: 0727 62937.

● Watford Lemodem, digitiser, video enhancer. All perfect. Make me an offer! Tel: 0833 60491 after 6pm.

Ads will be accepted under the following conditions:

- This service is EXCLUSIVELY for the use of private readers. No trade ads will be allowed.
- To avoid encouraging software piracy, all ads will be carefully vetted before they are accepted.
- Ads can only be accepted on this form (or a photocopy of it).
- There is no maximum to the number of words you include in your ad. If there is insufficient room on the form, continue on a separate sheet of paper.
- The cost is 20p per word, with a minimum of 10 words.
- We GUARANTEE your ad will appear in the next available issue of The Micro User.

EVERYTHING YOU NEED TO KNOW ABOUT DESKTOP PUBLISHING

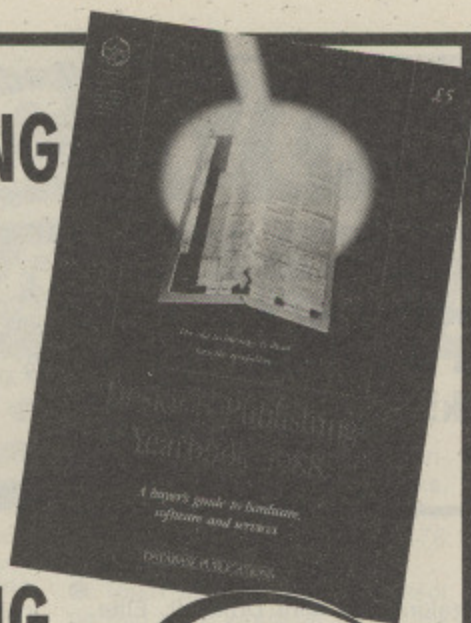

ONLY £2.50

The Desktop Publishing Yearbook 1988 is an invaluable buyer's guide containing the most detailed survey available of hardware, software and services in the electronic publishing field.

And there are clearly-written "how-to" articles for both the newcomer to Desktop Publishing and the experienced user.

Articles cover single-user and multi-user publishing systems, publishing software, laser and other electronic printers, matrix printers, digitisers and scanners, computer typesetting, magazine and newspaper composition, documents and forms creation, bureau services, word processors, and many other key topics.

This unrivalled reference source was enthusiastically received by visitors to the recent Desktop Publishing Show.

You can purchase your own copy for only £2.50 (plus p&p) – a saving of £2.50 on the normal price. Simply fill in the coupon and send it to the address below.

ORDER COUPON

Please send me _____ copy/copies of the Desktop Publishing Yearbook 1988 at £2.50 each plus 50p p&p per book. (UK only)

- I enclose a cheque payable to Database Exhibitions
- Please debit my Access/Visa card no:

Expiry date: /

Signed: _____

Name: _____

Address: _____

Postcode: _____

Send to: Desktop Publishing Yearbook, Database Exhibitions, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.

MU5

INTERFACING ?

We have Interfaces available ex-stock for many purposes including Stepper Motors, Lamps, Relays and small DC motors. From the User Port, you can control two stepper motors and a relay, or up to 9 relays can be added to control mains devices. Full user information included with each.

- VERSION 1. Powered from BBC auxiliary power supply. £ 23.00 inc. P & P.
- VERSION 2. With mains Power supply optically isolated £ 49.00 inc. P & P.
- VERSION 3. High output for stepper motors or other. £ 42.50 inc. P & P.

Up to 3 Amps per line. Needs a separate power supply which we can supply (See below). POWER SUPPLIES available for many voltages and currents. Write or 'phone for quote.

STEPPER MOTOR CONTROLLER

Our S.M.C. is now widely used for DIY plotters, turtles and computer control (CNC) of small machine tools. It allows you to control two stepper motors and a relay direct from BASIC by adding 20 easy-to-use 'star' commands. Save the machine code writing time for your project.

ROM with easy fitting instructions £ 14.95 inc. P & P.

SCRAPBOOK

A free-format storage & retrieval system for all types of information including colour and graphics. Incorporates screen designers and facilities to search, sort, browse, print, extract etc. Forget fields, records etc. Store information as you want to read it - on the screen. Store up to 320 Teletext screens on a disc. Do automatic 'slide show' type presentations.

Disc. (40 or 80 Track) and manual £ 12.95 inc. P & P.

Instant On-Screen Help

All BBC models can have On-Screen help with our range of ROMs and Discs. Why thumb the handbook when you can have the important details on screen even when wordprocessing.

WORDWISE COMPANION

For Computer Concepts Wordwise and Wordwise Plus wordprocessors.

BASIC COMPANION

Instant help for getting to grips with BASIC programming.

PROGRAMMERS COMPANION

Colours, Graphics, Sounds, VDU codes, ASCII codes, *FX commands etc.

MACHINE CODE COMPANION

Assembly language help. OS routines, 6502 Instructions, Addressing Modes, Vectors etc.

All the above ROMs come with easy to follow fitting instructions £ 19.95 inc. P & P.

All of the above ROMs are also available as ROM IMAGES on disc for loading into sideways RAM. Any of the above ROMs £ 8.95 All FOUR Companions £ 19.95 inc. P & P.

Disc Versions

Disc versions of Basic, Programmers and Machine code Companions. £ 9.95 inc. P & P.
All three Disc Companions on one disc. 40 or 80 Track £ 19.95 inc. P & P.

Demonstration Disc

With interactive demonstration and samples from all four Companions. £ 1.25 inc. P & P.



Telephone (0492) 76925 For Details.



MICRO HELP

Hafod-y-Mor, Hill Terrace, LLANDUDNO, LL30 2LS.

ACCESS
VISA

FREE

Deluxe 120 disk capacity lockable disk box worth over £14. (Please state if you want the 100 capacity box instead)

When you buy 25 disks for only £18.25 or 50 disks for only £27.50 or 100 disks for only £44.50

All disks are Japanese Higrade 5.25 DS/DD certified to 96 tpi. They come with hub rings, envelopes & labels, and a unique 5 year guarantee - Great Value!

SCHOOL & GOVT. ORDERS WELCOME

FREE!

with every order. Our new 30 page catalogue crammed with offers on consumables BBC hardware and peripherals

And amazing prices and deals on all the latest BBC software!

Catalogue available separately @ 50p

All prices include VAT & Postage

Nebulae, Dept. M1. FREEPOST, Kilroot Park Industrial Estate, Carrickfergus, Co. Antrim, BT38 7BR
Telephone (09603) 51020 (Monday to Friday 9 to 5)
7 Day delivery and 14 day money back period.
We accept orders from all government bodies, schools, universities, PLC's etc

Tel: (09603) 51020

ORDER BY PHONE FOR SAME DAY DESPATCH

FREEPOST YOUR ORDER TODAY - NO STAMP REQUIRED

Directory kill

*Tidy up your ADFS discs the easy way
with Darren Dickens' great utility*

DELETING directories can be annoying when the *Dir not empty* error keeps coming up. Removing individual directories, sub-directories and files can be a very time-consuming job. So here's a directory killer to make life easier.

Just type it in, make sure you've made no typing errors using Get it Right!, then save the program as anything except DirKill, which is the name the machine code routine is saved as. It is called by entering:

```
*DirKill <pathname>
```

Examples of the types of calls you would use are:

```
*DirKill @
*DirKill *.L*.B*.MicroUser
*DirKill Let*.Busi*.Mic*
*DirKill $
*DirKill
```

The last two are equivalent and will erase everything on the disc once you have satisfied the checking prompt. When called, the program first checks that the ADFS pathname is not too long to

store. The last name specified in the call is the directory which is to be removed: If it contains any files they are unlocked and deleted. Sub-directories are entered and removed in the same fashion.

It is theoretically possible for the program to quit before it has truly finished if it has to go down 256 directory levels. If this does happen it will have deleted the lowest 256 levels and then stopped, so re-issuing the command will kill the next lowest 256 levels. However, this situation should never arise in reality.

The program is not re-entrant as it has been highly optimised and so is not suitable to include in sideways ram as a utility. If this was needed the program could be expanded to its proper form without the tricks.

There are no fast, illegal optimisations and the program will work on any BBC Micro that uses ADFS. On the Master and Compact there is a section of memory known as the transient utility workspace – at &DD00 – and DirKill operates in this region, so preserving all user areas.

The program must be assembled at &900 for the BBC B and B+ but it works equally well.

```
10 REM Directory Killer 6.20
20 REM For all BBC Micros with ADFS
30 REM (except Archimedes!)
40 REM Written by D. Dickens
50 REM (c) The Micro User
60 REM -----
70 BX=&DD00:REM &900 on B, B+
80 FileLength=52:ZeroPage=&70
90 Blank$=STRINGS(FileLength,"x")
100 osgbbp=&FFD1:osargs=&FFDA
110 osfile=&FFDD:osrdch=&FFE0
120 oswrch=&FFEE:osasci=&FFE3
130 osnewl=&FFE7:oscli=&FFF7
140 FOR IX=0 TO 2 STEP 2
150 PX=BX:LOPT IX
160 LDA #0:TAY:JSR osargs
170 CMP #8:BEQ Adfs
180 BRK:OPT FNequB(145)
190 OPT FNequS("Not ADFS"):BRK
200 .Adfs:LDX #3
210 .SaveLoop:LDA ZeroPage,X
220 STA Spare,X:DEX:BPL SaveLoop
230 LDA #1:LDX #ZeroPage:LDY #0
240 JSR osargs:LDX #0
250 .MoveLoop:LDA (ZeroPage),Y
260 STA DirName,X:CMP #13
270 BEQ GotName:INX:INY
280 CPY #FileLength+1:BNE MoveLoop
290 JSR Restore
300 BRK:OPT FNequB(144)
310 OPT FNequS("Path longer than "+STR$(FileLength)+" chars"):BRK
320 .GotName:LDA #1:STA ZeroPage
330 JSR RunCommand:LDA #6
340 JSR ReadBlock:LDY #9
350 .StoreLoop:LDA Text+3,Y
360 STA KilledDir,Y:DEY
370 BPL StoreLoop:CMP #36
380 BNE Start:LDY #17
```

```
390 .AreYouSureLoop
400 LDA AreYouSure,Y:JSR osasci
410 DEY:BPL AreYouSureLoop
420 JSR osrdch:BCS Abort:JSR oswrch
430 AND #&5F:CMP #89:BNE Abort
440 JSR osnewl
450 .Start:LDA #13:STA Text+11
460 .DirLoopStart:INC Block+5
470 JSR ReadFileName:LDA Block+5
480 BNE UpDir:LDA #5
490 LDX #Block2 MOD 256
500 LDY #Block2 DIV 256
510 JSR osfile:CMP #2
520 BNE DeleteFile:INC ZeroPage
530 LDA #(Text+1) MOD 256
```

This is one of hundreds of programs available FREE for downloading on

MicroLink

In addition to these many BBC Micro programs in the MicroLink library will also run on the Electron.

```
540 LDX #Dir MOD 256
550 JSR DoCommand:JMP DirLoopStart
560 .Abort:JSR Restore:BRK
570 OPT FNequB(146)
580 OPT FNequS("Aborted"):BRK
590 .UpDir:LDX #Dir MOD 256
600 LDY #Dir DIV 256:JSR oscli
610 JSR ReadFileName:DEC ZeroPage
620 BEQ Exit
630 .DeleteFile:LDA #(Text+1)MOD256
640 JSR DeleteFileName
650 JMP DirLoopStart
660 .Exit:JSR Restore:LDA KilledDir
670 CMP #36:BEQ Return
680 LDA #KilledDir MOD 256
690 JSR DeleteFileName
```

```
700 .Return:JMP osnewl
710 .DoCommand:STA CommandLoop+7
720 STX CommandLoop+1:LDY #9
730 .CommandLoop
740 LDA DirName,Y:STA Command,Y
750 LDA DirName,Y:STA DirName,Y
760 DEY:BPL CommandLoop
770 LDA #13:STA DirName+10
780 .RunCommand:LDX #Command MOD256
790 LDY #Command DIV256:JMP oscli
800 .DeleteFileName:PHA
810 LDX #Access MOD 256
820 JSR DoCommand:PLA:PHA
830 LDX #Delete MOD 256
840 JSR DoCommand
850 JSR PrintDeleting
860 PLA:STA PrintNameLoop+1:LDY #0
870 .PrintNameLoop:LDA Text+1,Y
880 JSR oswrch:INY:CPY #10
890 BNE PrintNameLoop:RTS
900 .PrintDeleting:LDY #8
910 .DeletingLoop:LDA KillString,Y
920 JSR oswrch:DEY
930 BPL DeletingLoop:RTS
940 .ReadFileName:LDA #0
950 STA Block+9:LDA #8
960 .ReadBlock:LDX #Block MOD 256
970 LDY #Block DIV 256:JMP osgbbp
980 .Restore:LDX #3
990 .RestoreLoop:LDA Spare,X
1000 STA ZeroPage,X:DEX
1010 BPL RestoreLoop:RTS
1020 .Block
1030 OPT FNequB(0):OPT FNequD(Text)
1040 OPT FNequD(0):OPT FNequD(0)
1050 .Text:OPT FNequS(STRINGS(13," "))
1060 .Block2:OPT FNequW(Text+1)
```

Turn to Page 134 ►

◀ From Page 133

```
1070 OPT FNequD(0):OPT FNequD(0)
1080 OPT FNequD(0):OPT FNequD(0)
1090 .Spare:OPT FNequD(0)
1100 .AreYouSure
1110 OPT FNequS(" ? csid elohw llik")
1120 .KillString
1130 OPT FNequS(" gnllik")
1140 OPT FNequB(13)
1150 .Delete
1160 OPT FNequS("DELETE ")
1170 .Access
1180 OPT FNequS("ACCESS ")
```

```
1190 .KilledDir
1200 OPT FNequS(STRING$(10," "))
1210 OPT FNequB(13)
1220 .Dir
1230 OPT FNequS("DIR"+STRING$(4,"")+
"")
1240 OPT FNequB(13)
1250 .Command
1260 OPT FNequS("DIR"+STRING$(4,"")+
"")
1270 .DirName
1280 OPT FNequS(Blank$)
1290 OPT FNequB(13)
1300 ]:NEXT
1310 PROCcli("SAVE DirKill "+STR$B$+"
+STR$P$)
```

```
1320 END
1330 DEF FNequB(B%):?P%=B%:P%=P%+1:=IX
1340 DEF FNequW(W%):!P%=W%:P%=P%+2:=IX
1350 DEF FNequD(D%):!P%=D%:P%=P%+4:=IX
1360 DEF FNequS(s$)
1370 $P%=s$:P%=P%+LENS$:=IX
1380 DEF PROCcli($8700):LOCAL X%,Y%
1390 Y%=7:CALL&FFF7:ENDPROC
```



10 = 00	190 = 2F30 5	370 = E8CD C	550 = D2E8 D	730 = 9518 C	910 = 1A7D 3	1090 = 6E3D 8	1270 = 9644 E
20 = 00	200 = AEB9 4	380 = 9D32 F	560 = 4E5B E	740 = D5C7 4	920 = CD3B 2	1100 = A653 2	1280 = EFBB 5
30 = 00	210 = E35D A	390 = 3906 6	570 = F67D D	750 = E31 4	930 = 5B7F F	1110 = 52AC A	1290 = 8374 E
40 = 00	220 = C648 2	400 = 869A 4	580 = 3727 1	760 = EC56 B	940 = 7DF2 B	1120 = 836E F	1300 = DA42 F
50 = 00	230 = C4A 3	410 = 515C 4	590 = F985 D	770 = 9230 9	950 = 22BC E	1130 = D8F1 9	1310 = 8FED F
60 = 00	240 = 5C73 8	420 = EB1D 1	600 = 2B5D E	780 = 82A6 0	960 = 94BD 5	1140 = 8374 9	1320 = FD2E 2
70 = CA2C C	250 = 71AE 3	430 = A37B E	610 = 25A1 A	790 = D75A 8	970 = B07F F	1150 = 94A1 A	1330 = B599 6
80 = EC4A 5	260 = 15F1 E	440 = 3334 7	620 = CC6C D	800 = 844C 5	980 = EEC5 B	1160 = 1C37 1	1340 = C48F 4
90 = 5AFF B	270 = F40B C	450 = E38C 7	630 = BE54 E	810 = 5C1D D	990 = 3D15 F	1170 = 25AB F	1350 = 5026 4
100 = 5A42 B	280 = D089 7	460 = 18C1 4	640 = A096 B	820 = B8AF 0	1000 = 455E 9	1180 = 3A33 E	1360 = 46A9 D
110 = 8D49 F	290 = A85C 5	470 = CC4B E	650 = 2DDA C	830 = A4BF 3	1010 = CED6 5	1190 = B002 7	1370 = 34CE A
120 = 8F1A 7	300 = 10E0 E	480 = EAD9 B	660 = A57 C	840 = 4402 E	1020 = C24E A	1200 = 5781 5	1380 = E297 B
130 = 33D6 6	310 = 936B 8	490 = 29A4 1	670 = D1B0 B	850 = D6C1 7	1030 = 184A 3	1210 = 8374 6	1390 = 50E0 B
140 = A418 4	320 = ADE3 B	500 = C3DB 7	680 = 69B4 F	860 = 1CEC 9	1040 = FE1A F	1220 = BB1E 5	
150 = B2A4 6	330 = 1988 D	510 = 6BE6 A	690 = A096 2	870 = 113A 5	1050 = 3D73 1	1230 = 120A B	
160 = 22FB 5	340 = DA1 E	520 = 32DC E	700 = 1CE4 8	880 = 68A8 7	1060 = 9CAB 5	1240 = 8374 B	
170 = D374 1	350 = DC94 5	530 = 852C 1	710 = B93C F	890 = 4EB0 1	1070 = FE1A 2	1250 = 8AA2 C	
180 = 23D1 5	360 = D35 2	540 = 8B7D 8	720 = E59A 7	900 = 85AC C	1080 = FE1A 5	1260 = 9697 3	

MICRO STUDIO

USE OUR READY MADE GRAPHICS
AS A BASIS FOR YOUR ARTWORK
LOOK ARCHIMEDES USERS




New Archimedes Graphics Library
For use with BASIC programs, CLARES
ARTISAN AND GRAPHICWRITER. More than
2000k of sprite graphics in full colour comprising
over 100 pictures on 3 disks for£21.95



BBC/MASTER SOFTWARE
STOP PRESS PAGEMAKER USERS
Pagemaker Graphics Library
150 cutouts (Pack 1)£14.95
Utilities£9.95
30 new fonts£7.95
Cutout or Font Previewer£9.95
FSE-AMX or AMX-FSE Converter£9.95



FLEET STREET EDITOR USERS
Fleet Street Graphics Library
200k (disc 1)£14.95



QUEST PAINT USERS
Quest Paint Graphics Library£14.95



GRAPHICS FOR THE BASIC BBC MICRO
VIDEPAK - 150 screen pictureshow£14.95



All prices include VAT and P&P UK.
Europe add £3.00. Outside Europe add £5.00
State DFS format (40/80 ss/ds)
Educational orders welcome.
Access and Visa Welcome.

£££ SAVE MONEY £££

Special Offer

ARCHIMEDES 310 with free software£845.00

Send SAE for catalogue and prices

Dept 3, Micro Studio, 83 Clay Street
Soham, Cambs CB7 5HL
Tel: (0353) 721736

DISCOUNT MAIL ORDER

FUTUREPLACE LIMITED,
105 Arica Road, London SE4 2PS
Telephone enquiries (01) 639 5479
All prices include V.A.T. C.W.O.
P&P (A) £16 (B) £8 (C) £6

ARCHIMEDES (A)

A305 Base£750.00
A305 Mono£800.00
A305 Colour£950.00
A310 Base£830.00
A310 Mono£880.00
A310 Colour£1035.00
A310M Base£896.00
A310M Mono£946.00
A310M Colour£1101.00

MASTER COMPACT (B)

Entry System£350.00
TV System£370.00
Mono System£400.00
Colour System£550.00
RS232 Interface£28.99
Extra 3.5 Drive£105.99
Pal TV Adaptor£27.60

PRINTERS (C)

Citizen 120D£165.00
Citizen LSP100£200.00
Citizen MSP 10E£245.00
Sheet Feeder£142.99
Citizen MSP 15E£270.25

Sheet Feeder£172.50
Citizen MSP 40£327.99

MASTER SERIES (B)

128k£415.00
Turbo Upgrade£118.00
512k Upgrade£209.00
Master Et£339.99
Econet Module£46.00
Eprom Cartridge£13.95
Z80 2nd Processor£368.00
IEEE Interface£299.00
100M Econet Cable£93.99
10 Station Lead Set£27.60
File Server LVL 2 80T£224.99
Printer Server Eprom£44.85
File Server LVL 1 80T£94.30

Z88 LAPTOP COMPUTER (C)


Z88£270.00
Mains Adaptor£9.50
32k Ram or Eprom Pack£17.50
128k Ram or Eprom Pack£46.00
PC or BBC Link£23.00
Serial Printer Cable£9.50
Parallel Cable£27.00
Modem£93.00

*** SPECIAL OFFER ***

The 21st order received will be given to the purchaser totally
FREE OF CHARGE

LIVE IT UP AT HOTEL CALIFORNIA!

WIN A HOLIDAY FOR TWO IN CALIFORNIA

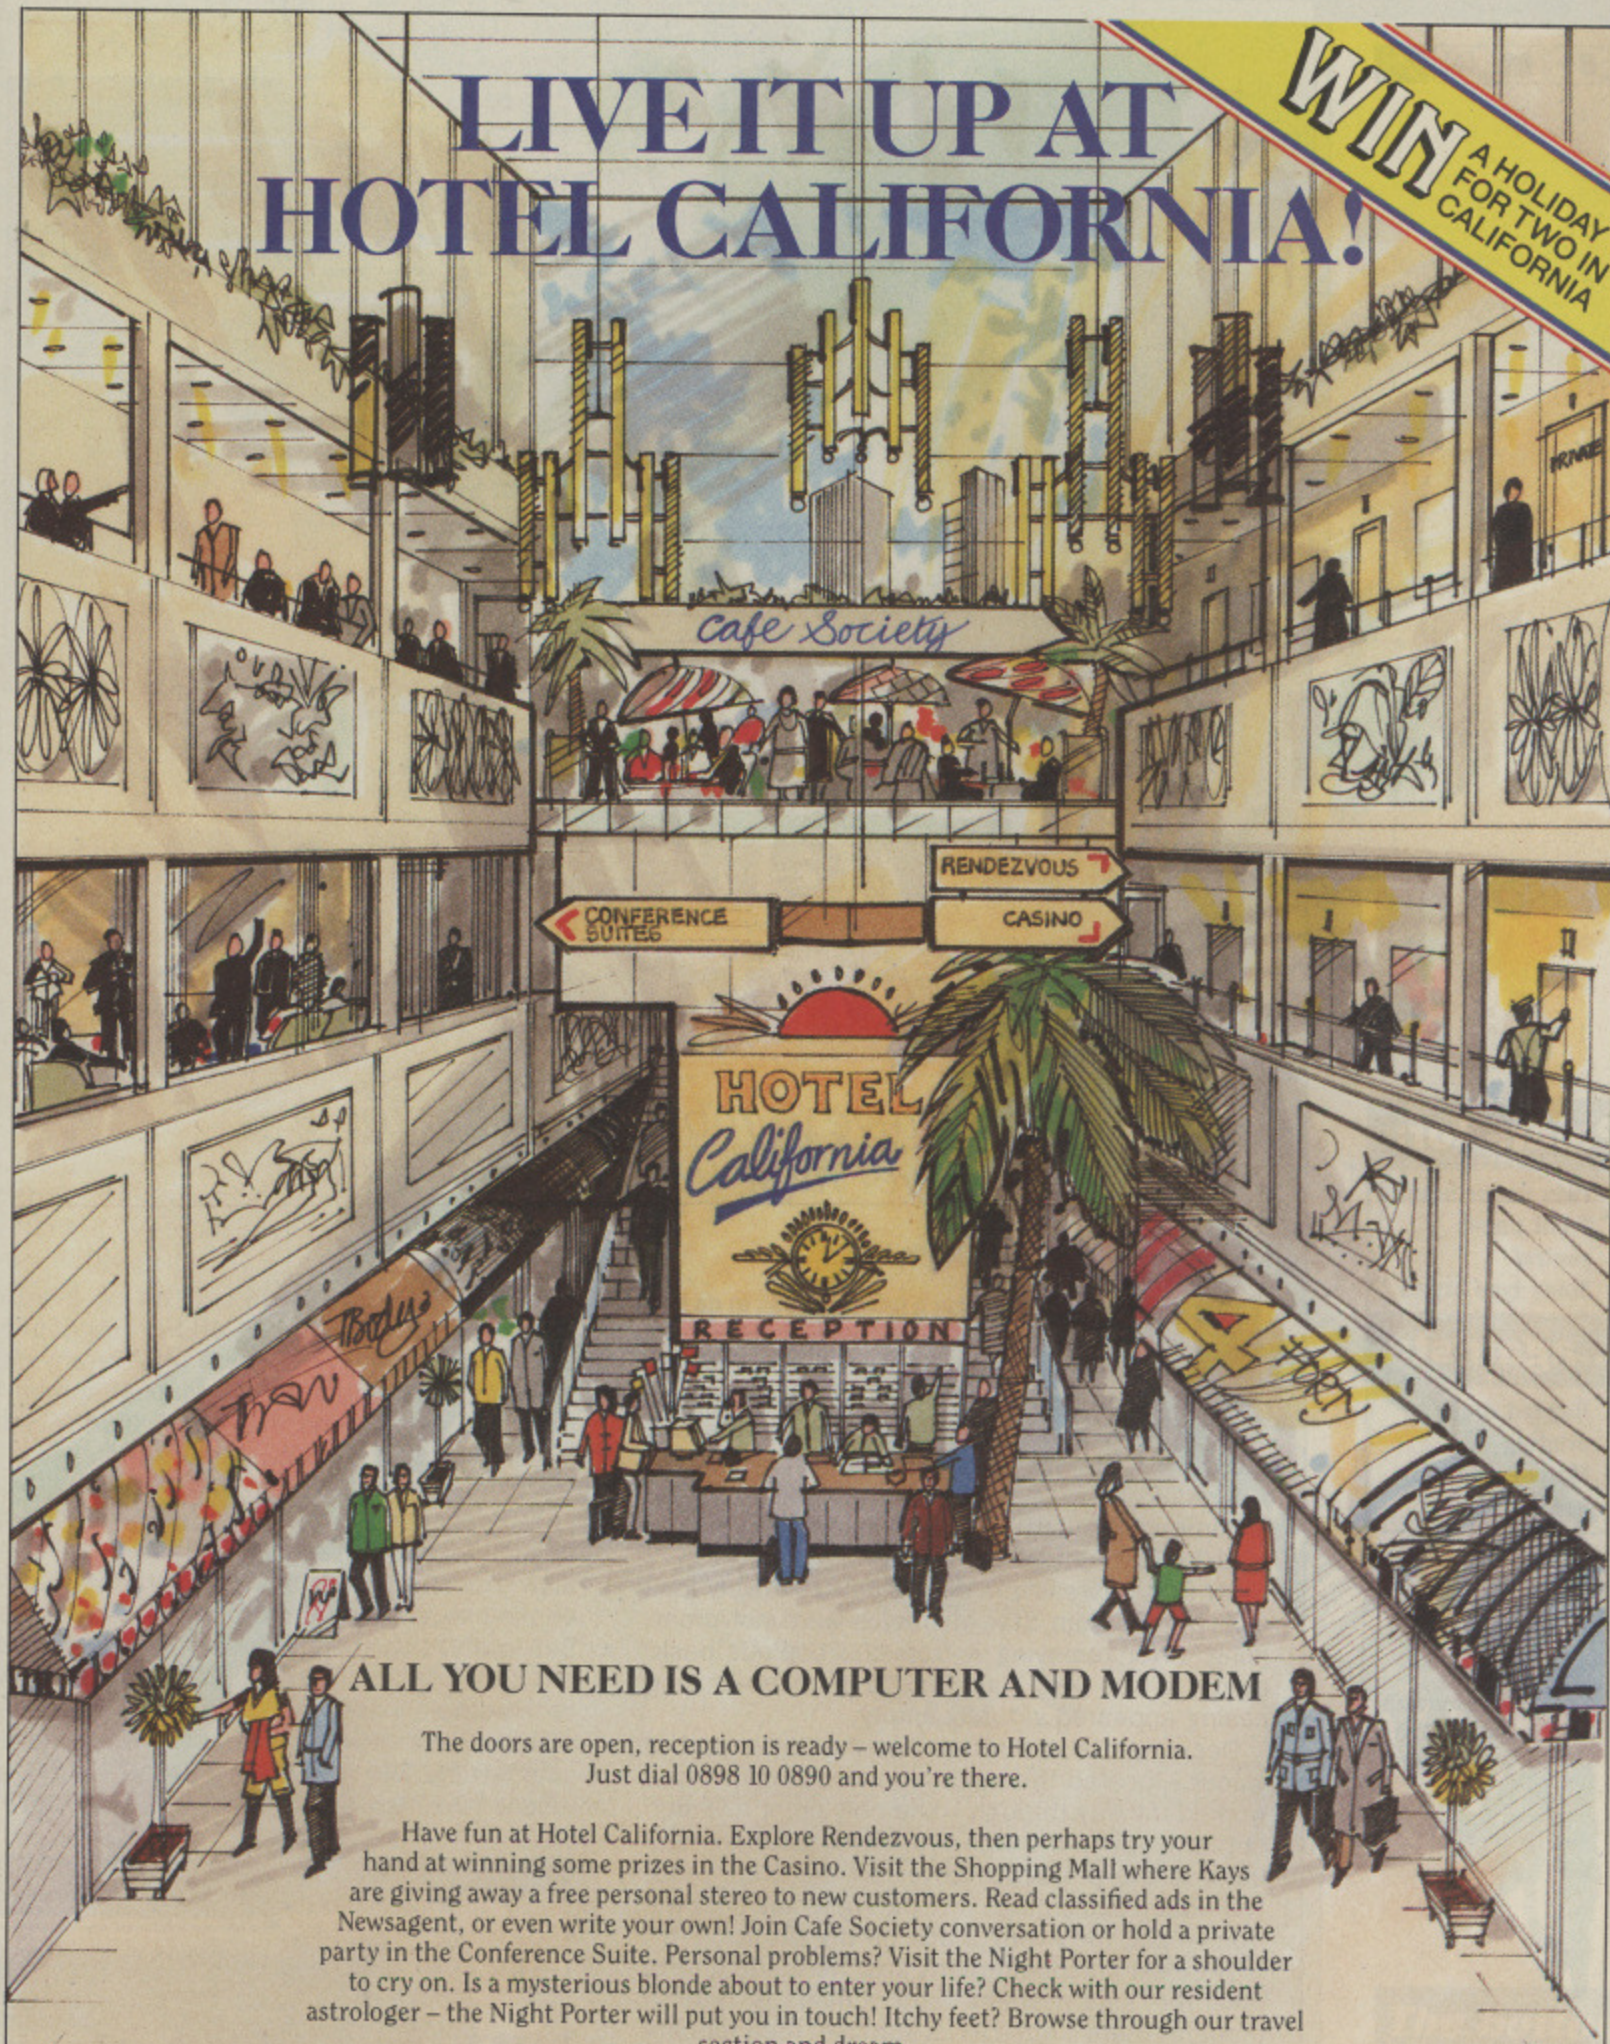

ALL YOU NEED IS A COMPUTER AND MODEM

The doors are open, reception is ready – welcome to Hotel California.
Just dial 0898 10 0890 and you're there.

Have fun at Hotel California. Explore Rendezvous, then perhaps try your hand at winning some prizes in the Casino. Visit the Shopping Mall where Kays are giving away a free personal stereo to new customers. Read classified ads in the Newsagent, or even write your own! Join Cafe Society conversation or hold a private party in the Conference Suite. Personal problems? Visit the Night Porter for a shoulder to cry on. Is a mysterious blonde about to enter your life? Check with our resident astrologer – the Night Porter will put you in touch! Itchy feet? Browse through our travel section and dream.

Hotel California. For 18s and over. Operate your modem at 1200/75 baud as for Micronet, Prestel and other viewdata systems.

TELEMAP GROUP LTD., DURRANT HOUSE, 8 HERBAL HILL, LONDON EC1R 5EJ

At time of going to press all calls are charged at 5.06p per 12 secs. off-peak and 5.06p per 8 secs. peak inclusive of VAT.

=1%
=1%
=1%

E
5
E
F
F
2
6
4
4
D
A
B
B

,
2PS
479
O.

72.50
27.99

15.00
18.00
09.00
09.99
46.00
13.95
58.00
99.00
03.99
27.60
24.99
44.85
94.30

(C)

70.00
99.50
17.50
46.00
23.00
99.50
27.00
93.00

tally

B B+ m  



A new star on the printer scene

Steve Turnbull investigates a novel near letter quality printer

Points for:

- Twin paper input
- Front panel control
- Many type styles

...against:

- Ragged draft printing
- Manual doesn't use BBC Basic

FOR normal home use a printer needs to do two things: Print listings and screen dumps, for which you need continuous sprocket-fed paper, and print letters on single sheets. Many people compromise and use standard listing paper for letters too, but it doesn't look good.

It would be nice to be able to feed your own letterhead through when you need to, and the LC-10 just might be the answer.

My first impressions of this new relatively low-cost printer from Star Micronics were not promising. After removing it from the copious packaging it was very light and the cheap-looking casing appeared virtually empty.

Deciding that discretion was the better part of valour I located the installation instructions and worked my way through – the only point to watch out for if you're the type who never reads instructions is the protective cover on the print head. The ribbon cable plugs into the right side near the front – just the wrong place for my set up.


The next disappointment was the guide unit to take the single sheet feed. Cheap is right, I thought, there's not even a sprocket feed for continuous paper. I have never been so wrong. Not only does the LC-10 take single sheet – it also takes continuous stationery at the same time. The sprocket feed unit is hidden under a cover at the back and once you've fed the paper through the first time you need never remove it – even if you want to use single sheet.

The printer is able to park sprocket feed paper by feeding it backwards until it's free of the platen

– paper roller – then you can set up the single sheet guide and print your letters. To get back to continuous feed all you do is remove any paper, demount the guide switch to continuous, pull back the bail rod and the printer then feeds the paper directly up into position. Simple.

Moving on to the printing itself, the LC-10 is fully Epson-compatible even down to the quad density and CRT graphics modes. And it accepts all the usual font commands: Elite and pica, condensed, expanded, proportional, italic and so on. But in addition there are commands to produce the draft characters in double height and double or quadruple size.

But you don't want to use the draft mode for your letters. The near letter quality – NLQ – print modes are also easily available: You can have

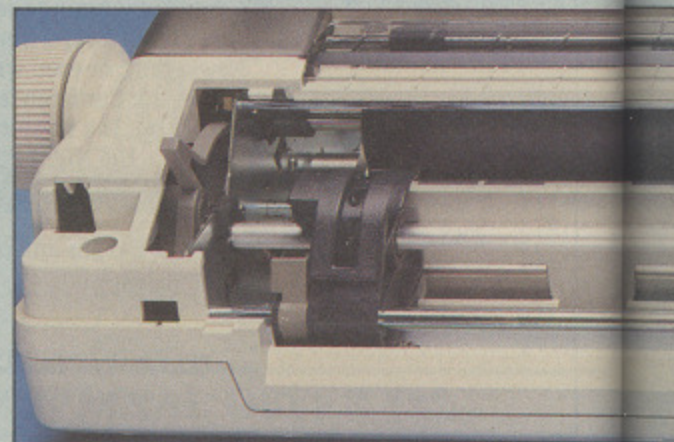

The back-mounted tractor makes single sheet feed easy

Printer	LC-10	KX-P1081*
Quoted draft speed	120	120
Quoted NLQ speed	30	24
Number of NLQ fonts	6	1
Continuous paper	Pushing tractor feed	Pulling tractor feed
Single sheet	Guided friction	Unguided friction
Paper loading	Semi-automatic	Manual
Front panel	20 functions	4 functions
Price	£229	£186

* The Panasonic KX-P1081 printer was reviewed in the October 1987 issue of The Micro User.

Comparison of LC-10 specifications with another Epson-compatible machine

three fonts – all selectable with control codes if you want variety – Courier, sanserif and two versions of Orator. You can have any of these in italics, too.

Finally, for all those special symbols you've wanted to print but always had to write in afterwards by hand, there is an area of ram in the printer into which you can place your own character definitions, even for NLQ printing.

The primary functions can be controlled from the front panel using four touch switches – which thankfully beep when selected. The major draft print styles and all the NLQ fonts can be selected, plus main paper movements – line feed, form feed and printer park.

A sticky label is provided with all the functions available from the panel, and this can be stuck on to the printer – but I never found a real need for it since the more obscure options were accessible from software.

There are bound to be drawbacks with a printer costing under £250, but these are few. In draft mode – which is quite fast – the left hand margin is a bit uneven. There is a program for designing NLQ characters in the manual but it's not written in BBC Basic and would take a fair amount of work to convert. Designing by hand is not too tiresome, so this is not a disaster.

On the whole the manual is satisfactory – printer manuals are notoriously bad for not telling you what you need to know. The chapter on setting up the machine and getting it to do its tricks with the paper is very clear, with plenty of diagrams.


Instead of the old style page by page description of control codes there are whole chapters dedicated to such things as using the machine with commercial software and using it from Basic

Type styles are:
 Draft characters.
 Courier characters.
 Sanserif characters.
 ORATOR WITH SMALL CAPITALS, OR
 with lower case characters,
 and ITALICS for all styles.

Print pitches are:
 Pica pitch.
 Elite pitch.
 Condensed pica pitch.
 Condensed elite pitch.
 proportional spacing for all pitches.

Expanded, Double-height,
 Double-sized,
 Quad-sized.

Various line and character spacings:

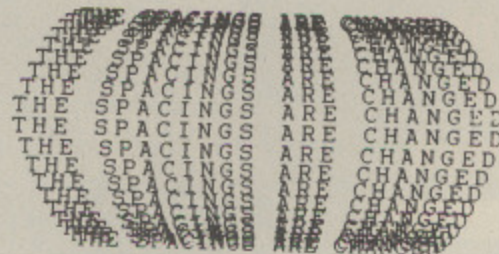

Also include:
 Emphasized, Double-strike.
 Underlining, Overlining,
 SUPERScript, SUBScript.
 Download characters: ENDA...AAAAA
 Dot graphics:

S&S

Examples of the LC-10 printing capabilities


– but that's not BBC Basic and there's nothing about the VDU command.

I've never really enthused about a printer before – it's usually a fight to get one to do anything – but I found the LC-10 a joy to use. If you're not confident about using control codes the front panel makes it easy to select your print style. And you have the best of both worlds with the continuous or single sheet feed without the need to remove the unused paper.

Product: LC-10
 Price: £229
 Supplier: Star Micronics UK Ltd
 Address: Craven House, Uxbridge Rd, Ealing, London W5 2BS
 Tel: 01-840 1800

The bottom line...

This printer is excellent. I can recommend it.

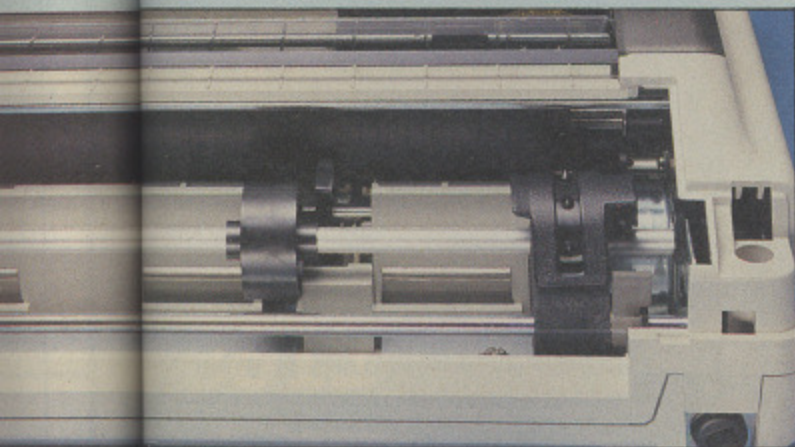

et feed easy

Use **TELECOM GOLD**
FREE* for a month!

Joining the communications revolution has never been easier...or cheaper

All you need to link your
BBC Micro to the exciting
world outside is a phone
— and the MicroLink
Communications Pack

The MicroLink Communications Pack contains everything you require to go on line. There's a powerful modem that sits between your BBC Micro and your telephone, a lead to connect them together and easy-to-use communications software.

You'll also be given a unique invitation to join MicroLink, with FREE registration and telex validation (normally costing £15), and a month's FREE* connect-time to your MicroLink/Telecom Gold mailbox. So you can find out for yourself what MicroLink is all about without it costing you a penny.

Of course you can also use your MicroLink modem and software to access thousands of other services all over the world, from giant databases in the USA to innumerable privately-operated bulletin boards throughout Britain that cover a vast range of subjects.

To take advantage of this very special package deal simply complete and mail the coupon opposite.

There are two options you can choose from:

MicroLink dual-speed modem: This stylish modem works at two speeds — 1200/75 and 300/300. Fully BABT approved, it satisfies most users' requirements for a modest price.



£99
incl. VAT

MicroLink multi-speed modem:


This offers the additional speed of 1200/1200 full duplex for users who want super-fast two-way transmission. Plus many extra features, including powerful auto-dial and auto-answer facilities. A remarkable price breakthrough for a really exceptional product.

£169
incl. VAT

APPROVED for connection to telecommunication systems specified in the instructions for use subject to the conditions set out in them.

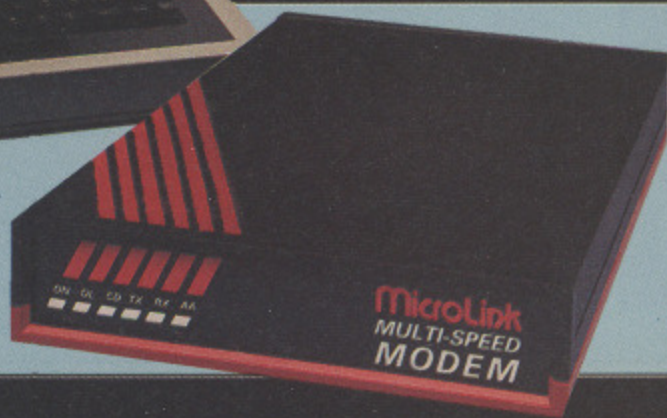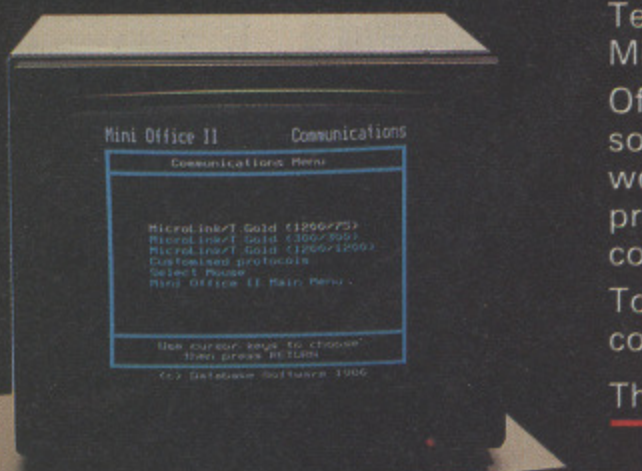

* This exclusive offer relates to connect time only and does not include telephone, any possible PSS charges or surcharged services.

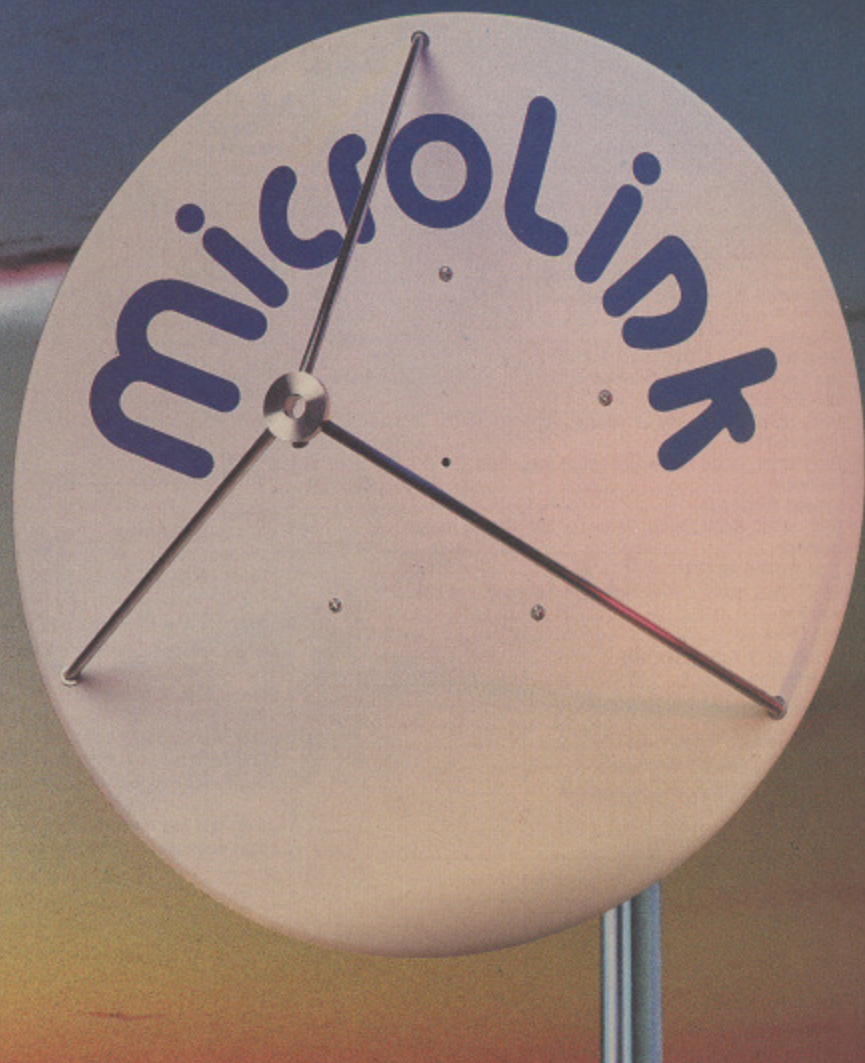

MicroLink is Britain's fastest-growing electronic mail service. It offers ALL the services of Telecom Gold – and a whole lot more besides.

With **MicroLink** you can link up with other users all over the world to send and receive electronic mail. It turns your BBC into a telex machine – without the need for expensive equipment or special phone line. It lets you send telemessages for next-morning delivery to ANY home or business in the UK or USA.

With **MicroLink** you can tap into a weather satellite and see pictures from space displayed in colour on your BBC monitor. You can use it to obtain legal and financial advice, to order flowers or book theatre and rail tickets.

With **MicroLink** you can receive free telesoftware programs over the phone to feed into your BBC. You can use it to turn text into typesetting or Braille. You can link in seconds to a database in New York, or key into the 400,000-word Great European Dictionary in Luxembourg. And it gives you direct access to up-to-the-minute financial information on every company in Britain.

The communications software that comes free with each modem is the complete Comms module from the acclaimed Mini Office II. To simplify preparing messages off line it also includes the COMPLETE Word Processor module of Mini Office II, which has many enhanced features not included in other word processors.

ORDER FORM

PLEASE SUPPLY:

- MicroLink dual-speed modem, software and BBC lead for £99
- MicroLink multi-speed modem, software and BBC lead for £169
- FREE registration and telex validation, plus FREE one month's connect time to MicroLink or
- I am already a subscriber to MicroLink

Software only available on disc for BBC B and Master

If you would like to join MicroLink and already have a modem and software simply tick the box alongside. You will then be sent full details of how to join.

- Cheque enclosed made payable to MicroLink Communications Ltd
- Please debit my Access/Visa card number:

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Signature Expiry date /

Name

Address

..... Postcode

Daytime phone

Send to: MicroLink Communications Ltd, FREEPOST, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.

Telephone orders: 0625 879940

Orders by Prestel: Key *89, then 614568383

Via MicroLink/Telecom Gold: 72:MAG001

Allow 28 days for delivery.

All prices include VAT & carriage (UK only).



UNBEATABLE DEALS

SMB COMPUTER ELECTRONICS (UK)

All Computers listed below are inclusive of VAT but carriage is £10 exc. via Securicor within 24 hours in UK on each item.

Items are only available via Mail Order and are covered by our Unique 1 year full guarantee at no extra cost. You can, however, obtain our extended guarantee, backed by an Enormous Insurance Group, on our behalf, at a nominal payment fee for a maximum of 5 years guarantee. Please phone or write to us for further details, conditions and an application form.

BBC COMPUTERS
BBC Master 128K £399
BBC with Turbo Board £486
(512K Processor Board £217.35
Universal 2nd Processor £96.25

BBC MASTER COMPACT RANGE
We have a large selection for you to choose from, as follows
ENTRY SYSTEM
BBC 128K, 640K Disc Drive and Software £360.00
TV SYSTEM
BBC 128K, 640K Drive UHF Modulator and Software £375.00

MONO SYSTEM
BBC 128K, 640K Drive, Software 12" HI res mono monitor £410.00
COLOUR SYSTEM
BBC 128K, 640K Drive, Software 14" med. res colour monitor £565.00
2nd Drive Kit £113.00

COMPACT ACCESSORIES
2nd 3.5 drive £103.00
Compact RS232 Interface £29.00
PAL TV Adaptor £29.00
Compact 5.25" Disc Lead £12.00
Compact Printer Lead £10.00

ARCHIMEDES at special prices
300 Series
305 Series
Basic £790.00
Mono (Green) £850.00
Colour £1110.00

310 Series
Basic £865.00
Mono (Green) £925.00
Colour £1100.00
NEW 310 Series
Basic £935.00
Mono (Green) £1015.00
Colour £1175.00

400 Series
410
Basic £1595.00
Mono (Green) £1850.00
Colour £1823.00
440 Series
Basic £2615.00
Mono (Green) £2680.00
Colour £2850.00

Archimedes information and Booklets available on request.
Archimedes games are available now! For all machines. Please ask for list.

PRINTERS
Amstrad
DMP 2000 £P.O.A
DMP 3000 £P.O.A
DMP 4000 £P.O.A
New LQ 3500 £P.O.A

Epson
FX80 £P.O.A
LX80 £P.O.A
EX800 £399.00
EX1000 £545.00
FX80 £315.00
FX1000 £439.00
LQ800 £429.00
LQ1000 £585.00
LQ2500 £790.00
LX800 £199.00
SQ2500 £899.00
EPSON Paper Roll Holder £17.00
EX80C/1000 Colour Option £55.00
EX800/1000 Colour Ribbon £18.00
FX80/86 Tractor Feed Unit £35.00
FX/LQ/LX800 Single Sheet Feeder £135.00
FX/LQ1000 Single Sheet Feeder £149.00
HI-80 Refills-Set of 4 pens £7.00
LX800 Tractor Feed Unit £39.00
LX800 Cut Sheet Feeder £75.00
LX1000 Tractor Feed Unit £55.00

Panasonic (Excludes VAT)
Dot Matrix IBM/Epson Compatible
KX-P1081 Special Price £140.00
KX-P1082 Special Price £170.00
Daisywheel
KX-P3131 Special Price £240.00

ALSO AVAILABLE
Single Sheet Feeder £190.00
Tractor Feed £85.00
Spare Ribbon £3.00

ACORN-OLIVETTI PRINTERS
JP101 Ink Jet Printer £49.00
(Only available while stocks last)

BROTHER DAISYWHEELS
Special Prices
HR15 'RS232' Daisywheel £270.00
HR20 Daisywheel £329.00

JUKI DAISYWHEELS
Juki 6100 Daisywheel £250.00
Juki 6200 Daisywheel £390.00
Juki 6300 Daisywheel £630.00
Juki 6400 Daisywheel £890.00
Note: All printers inc. FR/EE lead. Take £2 off a box of Listing paper OR labels, if bought with Printer at same time

PLOTTERS
Hitachi
Hitachi 672 Colour Plotter £475.00
(£20 off our usual price)

RIBBONS
Amstrad
8512/8256 £3.71
Coloured £4.82
Longlife £4.76
Coloured £6.27
Shinwa
CP80 £3.70
Coloured £4.20

Canon
PW1156/1080 £2.85
Epson
MX/FX/RX/1000/105 £3.10
Coloured £4.20
LQ/LP 1500 £2.90
LQ2500 £4.80
Coloured £3.80

Plain Listing Paper (ex VAT)
1000 9.5" x 11.5" Fanfold £6.00
2000 9.5" x 11.5" Fanfold £11.00
1000 15" x 11" Fanfold £10.00
1000 Sheets Full A4 Fanfold £12.00
2000 Sheets Full A4 Fanfold £20.00
Teleprinter Roll (Econo Paper) £3.50
(No carr. on less than 5 rolls)

All fanfold has micro perforated feed strips and leaves a smooth clean edge when detached from printer.
Carriage on 1000 sheets £1.50
2000 sheets £2.50

Printer Labels
(Mounted on continuous fanfold sheet)
1000 90 x 36mm (Single Row) £4.50
1000 90 x 36mm (Twin Row) £4.70
1000 90 x 49mm (Twin Row) £7.00
1000 102 x 36mm (Twin Row) £6.00
Carriage on 1000 sheets £1.00

!! Lowest Prices Ever !!
Discs 5.25" and 3.5" (Supplied in plastic boxes of 10)
Fully 100% error free guaranteed
48tpi 5.25" 96tpi 5.25" SS/DD 3.5" DS/DD 3.5"
10 £6.50 £8.75 £8.50 £10.45
20 £8.50 £11.00 £16.00 £19.75
30 £12.75 £14.25 £28.50 £29.50
40 £15.80 £18.00 £31.00 £38.60
50 £18.50 £20.00 £40.00 £47.50
100 £35.00 £37.50 £87.00 £93.00
200 £70.00 £72.00 £155.00 £175.00
500 £170.00 £185.00 £280.00 £427.50
500+ Discs call for prices
Disc Boxes available on request.
100 Disc Box £10.00
50 Disc Box £8.00
Plastic Boxes for 10 discs £1.05 only

Monitors - Mono
Philips
Philips BM7502 12" Hi-res CVBS Input, Audio Input, 20 Mhz Band Width, 2000 CHRS Display, Adjustable Viewing Angle, Green Display £79.00
Philips BM7522 Amber Screen £95.00
Philips BM7542 Dedicated WD Phosphor Screen Monitor £95.00
Philips BM7513 12" IBM compatible £120.00

Taxan
New Taxan KX117 12" Screen P31 £89.00
Taxan KX118 12" Screen P39 £99.00
Taxan KX119 12" PUL Amber Screen £99.00

Colour Monitors
Microvitec
Microvitec 1431 STD Res £201.35
Microvitec 1457 Med Res £255.00
Microvitec 1441 Hi-Res £391.00
Microvitec 2030 CS2- Std Res £425.00
Microvitec 1431AP £224.25
Microvitec 1451AP Med Res £293.25

Philips
New Philips CM8853 14" CVBX and RGB Med Res colour monitor. IBM PC compatible. Fast Blankup to enable Superimposing. Stereo Audio Sound. Ear phone socket. 600 x 285 lines vertical £259.00
(£10 off usual price)

Philips CM8852 14" Professional Med Res Colour . 700 dots x 285 lines £279.00
(£10 off usual price)

Philips CM8873 14" RGB High Res Colour monitor. Res 850 x 480 £540.00
(£10 off usual price)

Taxan Super Vision 620
High Res. Monitor with several unique features, at a price you can afford

Supervision 620
12" RGB High Res. monitor, IBM, BBC, Apple and most PC's. 635 x 312 lines. Positive or negative sync input. Text colour switchable to green, amber, white or blue or inverse white. Super high contrast tube. Optional swivel base with Clock/Calendar available
Special introductory offer £289.00
(£10 off)

New Supervision 625
12" High resolution Colour Monitor
681 Dots x 312 Lines £359.00
(£10 off usual price)

Monitor to TV converter
Well built AV7300 colour tuner module. Push button control. 12 preset channels. Built in Aerial. Compact design. Composite video only £65.00
(£10 off usual price)

All prices inc. of VAT Carriage on Monitors £10 exc via Securicor 24 Hours Service.
All Drives are covered by our special 2 year guarantee. All 40/80 Drives have switch at the front of the drives.

Disc Drives
5.25" and 3.5" Drives
40 track single psu £P.O.A
40 track single £P.O.A
80 track single psu £135.00
80 track single £113.00
40/80 track dual vertical psu £219.00
40/80 track dual vertical £235.00
40/80 track dual plinth £265.00
3.5" single drive £85.00
3.5" Dual Drive £149.00
3.5" Single Drive psu £135.00
3.5" Dual Drive psu £199.00

5.25" & 3.5" Combo
40/80 track/3.5"psu £189.00inc

Winchester Drives
Large range of Winchester Drives available. Please enquire for details.

Accessories
Twin Eprom Cartridges £10.00
Teletext/Prestel Receivers
Morley Teletext Adaptor £95.00
Acorn Teletext Adaptor £P.O.A
Acorn Prestel Adaptor £P.O.A
Eprom Programmers
Eprom Programmer with software £30.00
Rome/Eproms (Excludes VAT)
2764 £2.10
27128 £3.50
27256 £4.80
6264 (8K) £2.80

Computer Concepts
Inter-Word £41.50
Inter-Sheet £37.00
Inter-Base £55.00
Inter-Chart £26.00
Spell Master £49.50
Graphics ROM £23.00
Wordwise Plus £40.00
Wordwise £24.00
Disc Doctor £28.00
Caretaker £25.00
Termi £25.00
Speech ROM £24.00
Printmaster £24.00
Accelerator £48.00
MEGA-3 £80.00

Acorn
View 2.1 £35.00
View 3.0 £48.00
View Professional £79.00
Hi-View £36.00
View P.D. Generator £9.00
Viewsheet £37.00
ViewStore £37.00
ViewSpell & 80 track £29.00
ViewPlot £22.00
(Master/Compact specify)
ViewIndex £12.00
Over View £81.00 inc. P&P
(Packs 1&2 Master)

Advanced Computer Products
Adv. Disc Toolkit £29.00
Adv. 1770 for MC £29.00
Adv. 1770 BBC/B+ £29.00
Adv. Disc Investigator £24.00
Adv. Control Panel £29.00
Adv. Rom Manager £13.00

Other ACP products are available, please ask.

SEND ORDERS TO:
Purchasing Department (Mail Order)
SMB Computer Electronics (UK)
Dept (MU), 16 Pangbourne Drive,
Stanmore, Middlesex HA7 4QT




Tel: 01 958 4476 (24 hour answering service)

VAT Reg. No. 495500632
New Showroom and office
Now Open:
7 Sedley Place
Bond St. London W1
Tel: 01 629 4317

All prices inc. of VAT in this column. We also have a ROM/EPROM PROGRAMMING SERVICE @ £5 inc. ROM/EPROM. Just send disc/tape with machine specification BBC/MASTER/ELECTRON.

Full range of Pace equipment and software available, please phone for details, authorised dealer and stockist. Trade and education orders welcome.

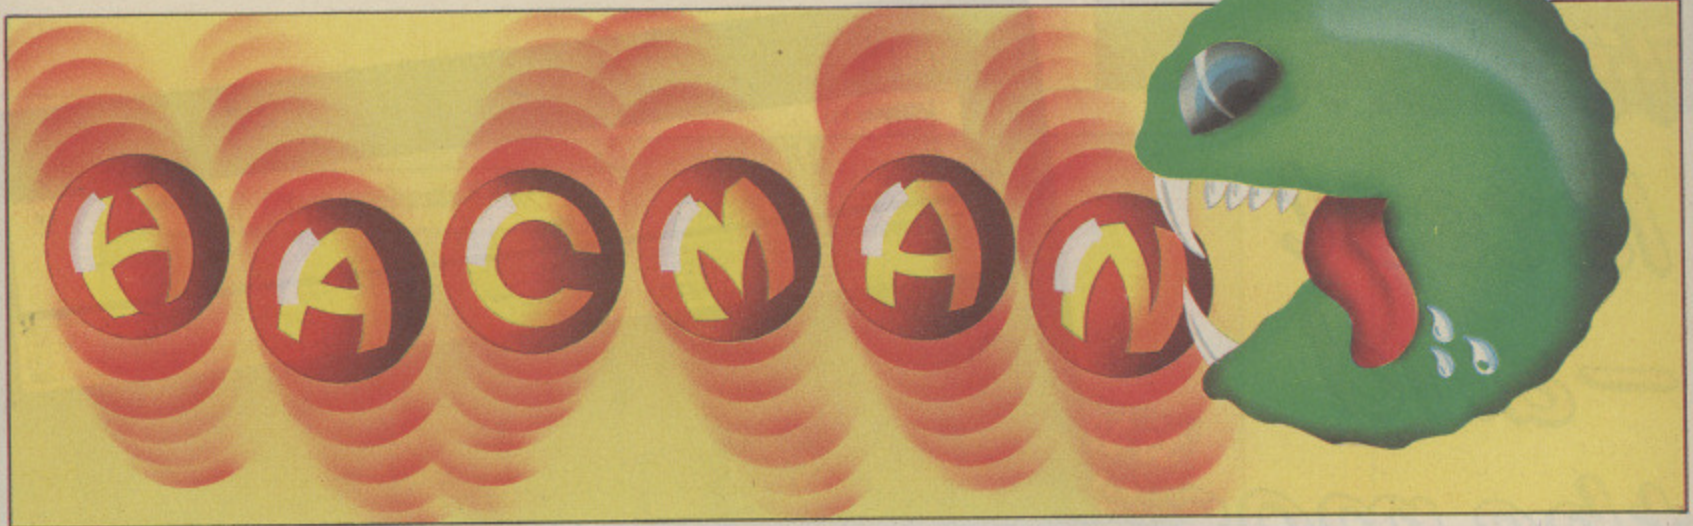

B B+ M

Featuring:
 Play it Again Sam,
 Stryker's Run,
 Codename: Droid,
 Thrust, Grand Prix
 Construction Set

AS promised, this month's offering features a few goodies for Master Compact owners. I try to cater for as many areas of the BBC Micro market as possible, and it occurred to me that I have not featured very much for the Compact. In fact, apart from last month's Codename: Droid cheat, I have featured only the extra/infinite lives pokes for the extended version of Stryker's Run in our May 1987 issue.

To make amends, I have written a couple of routines to give extra lives on the two **Play it Again Sam** versions of **Stryker's Run**, and infinite lives and fuel for **Thrust** from the same compilation.

For the standard version of Stryker's Run, enter Listing I and save it on a blank disc. Then type RUN and follow the on-screen instructions. For Thrust enter Listing II and follow the same procedure. For the extended version of Stryker's Run, put the Play It Again Sam disc into the drive and type:

```
*MOUNT
PAGE=&A00
LOAD"SRUN"
25 ?&C5CE=&24
```

then enter:

```
122 !&25DF=&CE6001A9;!&2920=&200801A9
```

for infinite lives, or alternatively:

```
122 ?&211B=n
```

where n is the number of lives. Type:

```
RUN
```

and the game will load with the appropriate modifications.

Line 25 is a fix for the bug in this version of the game. The sky is normally patrolled by aggressive Volgans in helicopters, and others that ride around on what I can best describe as jet-bikes, seemingly just having a good time. If the game is loaded as normal, the helicopters and jet bikes are locked together, trying desperately to move apart.

When Commander Stryker approaches the helicopter it will attempt to bomb him, succeeding only in destroying the jet bike and itself in the ensuing blast. If you just want an unfair advantage rather than a full-blown cheat, leave it as it is.

Brief history

Acorn designed the Master 128 as the logical successor to the BBC B, compatible with all external add-ons and all legally-written software, but providing a number of the most popular

Masterly selection

Hac Man looks over goodies on offer to Compact owners

expansions – such as sideways and shadow ram – as standard.

The Compact was in turn designed as a cut-down 128, for the many computer users who would never make use of the extra versatility offered by the full-spec machine, and also to offer a lower-cost entry to the BBC Micro market, in the same way that the Electron was designed to be an entry level Model B.

Both Master 128 and Compact have been designed to use the standard disc format – as provided by Acorn – of their respective predecessors: 5.25in single-density DFS format for the 128 (although the machine also has the double-density ADFS built in), and 3.5in ADFS format for the Compact, although DFS is also provided on the Welcome disc. For this reason, all the games designed to run on the Master 128 are supplied on 5.25in disc, because they are generally designed to run on the B and B+ models as well.

However, it has been brought to my attention that not all Master 128 owners use 5.25in disc drives. I was recently speaking to two local busi-

Turn to Page 143 ▶

Listing I: Stryker's Run extra/infinite lives


```
10 REM Stryker's Run extra/infinite
   lives
20 REM Master Compact Play It Agai
   n Sam standard version
30 REM by Hac-Man 1988
40 REM (C) The Micro User
50 FOR I%=0 TO 2 STEP 2:P%=&900:[O
   PT I%
60 LDA#&A9:STA &2893:STA &2C32:LDA
   #1:STA &2894:STA &2C33:\ infinite liv
   es
70 LDA#LX:STA &2465:\ no. of lives
80 JMP &576F
90 J:NEXT:*FX15
100 PRINT"Please insert Sam disc an
```

```
d hit a key...";
110 AX=GET:*MOUNT
120 !&C564=&FF0900FF
130 *RUN SETSCR
```



10 = 0 0	80 = 5DF3 1
20 = 0 0	90 = 7EF1 2
30 = 0 0	100 = 34DF 9
40 = 0 0	110 = 11A2 F
50 = 136B B	120 = BBB3 8
60 = CD52 3	130 = FBAA 0
70 = F93D 4	

*It's the
latest
—and
the most
exciting
add-on
for the BBC Micro*

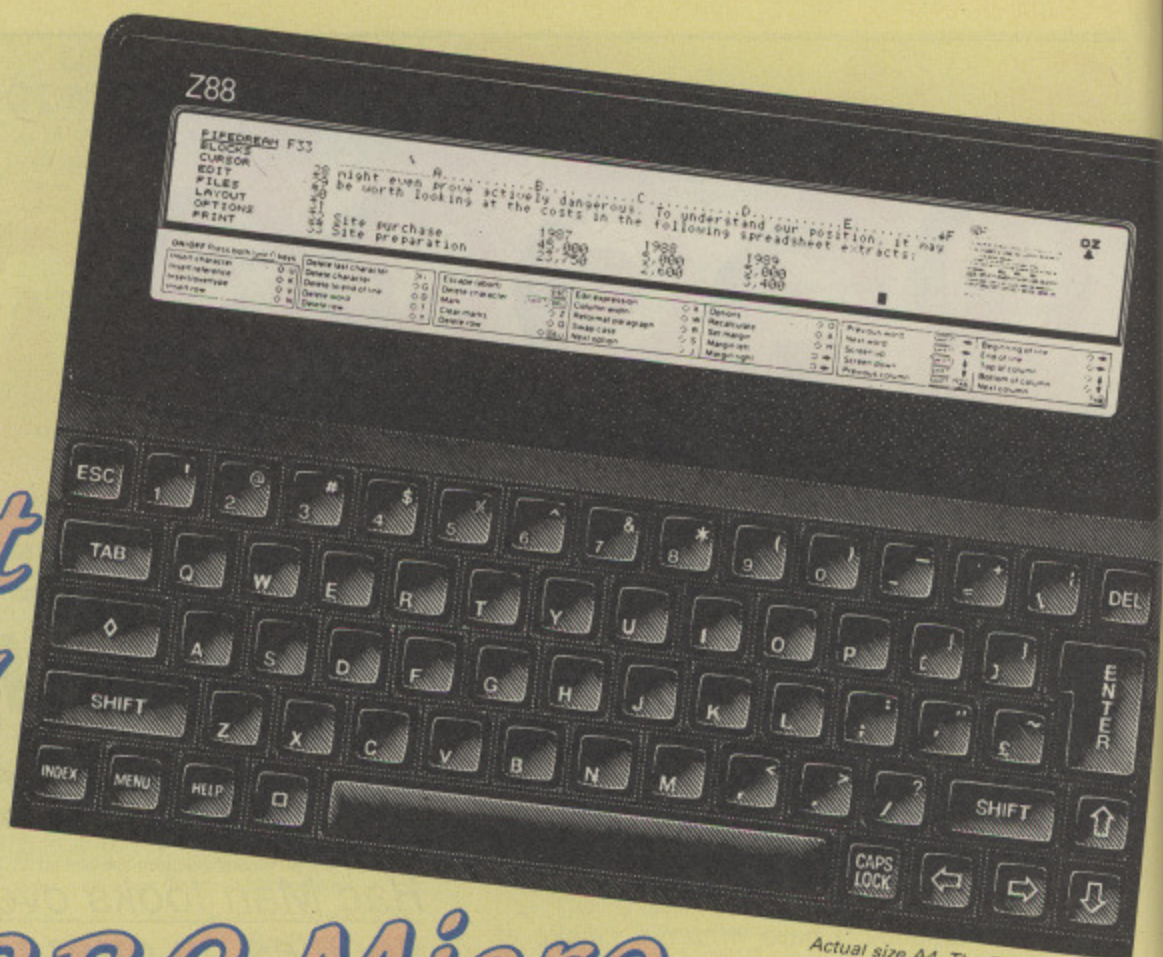

Actual size A4. The Z88 is less than an inch thick and weighs under 2lbs!

The Sinclair Z88 is the world's first truly portable, truly full-facility computer. And because it uses BBC Basic it is the ideal companion for the BBC Micro and Master.

Use it on the move!

Because it weighs less than a bag of sugar, it's an ideal travelling companion. Word-process your letters, memos or reports while on the move — then when you're back home or in the office transfer your files to your BBC Micro — it's done in seconds!

Solid-state storage

The Z88 doesn't need bulky disc drives. Memory is stored in solid-state interchangeable packs measuring 2½in square. Extra ram and eprom packs are available from suppliers such as Watford Electronics.

What the Z88 offers:


- 32k of ram built in, easily expandable to 416k.
- New supertwist LCD screen for sharp, clear viewing.
- Built-in word processor, spreadsheet, database, calculator, diary, calendar, comms, real-time clock and alarm — all included in rom.
- BBC Basic with integrated Z80 in-line assembler.
- Runs on four AA batteries, or use a mains adaptor.
- Printer editor to drive a wide range of printers.
- Detailed 218-page manual.

SPECIAL OFFER!

Exclusive to readers of *The Micro User* — the Z88 comes complete with a disc of games and utilities you can transfer direct from your BBC Micro with the FREE lead supplied.

The disc and lead can be bought separately for £22.70 from the address given on the coupon.

ONLY
£249
plus VAT

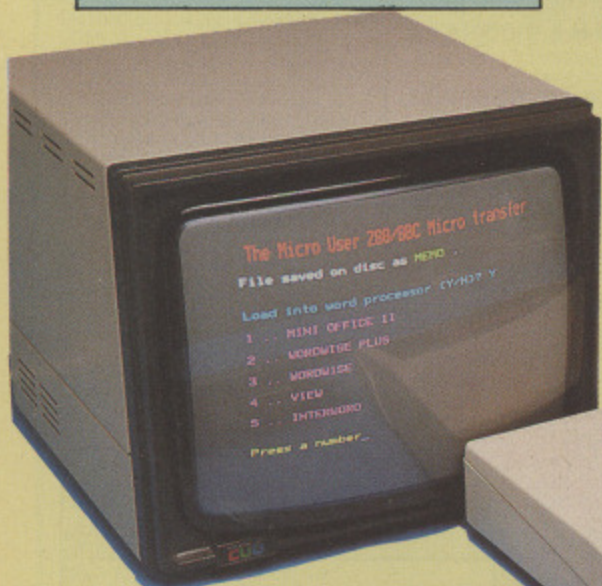

ORDER TODAY

ORDER FORM

Please send me a Z88 with FREE disc and BBC Micro/Master lead for **£286.35** (£249 + VAT).

- Cheque enclosed payable to Database Electronics
 Please debit my Access/Visa no:

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

Expiry date _____

Signed _____

Name _____

Address _____

Allow 28 days for delivery Postcode _____

SEND TO: Database Electronics, Europa House, Adlington Park, Adlington, Macclesfield SK10 5NP.

Telephone orders: 0625 879940
 Orders by Prestel: Key *89 then 614568383
 MicroLink/Telecom Gold: 72-MAG001

Listing II: Thrust infinite lives/fuel

```

10 REM Thrust infinite lives/fuel
20 REM Master Compact Play It Agai
n Sam version
30 REM by Hac-Man 1988
40 REM (C) The Micro User
50 FOR IX=0 TO 2 STEP 2:PX=&120:[O
PT IX
60 LDA#0:STA &56EB:JSR &5720
70 .call2 LDA#0:STA &5685:LDA#&60:
STA &56C7:JSR &5633
80 LDA#0:STA &1971:STA &1981:\ inf
inite lives
90 LDA#0:STA &1A54:STA &1A56:\ inf
inite fuel
100 JMP &3C80
110 ]:PX=&5AF1:[OPT IX
    
```

```

120 LDX#&FF:TXS:JMP call2
130 ]:NEXT:*FX15
140 PRINT"Please insert Sam disc an
hit a key...";
150 AX=GET:*MOUNT
160 ?&C76E=1
170 *RUN THRUST3
    
```



```

10 = 00 70 = 8DB0 8 130 = 7EF1 0
20 = 00 80 = FBD0 2 140 = 34DF B
30 = 00 90 = F82B 8 150 = 11A2 A
40 = 00 100 = 43FC C 160 = 3791 7
50 = 6F6F F 110 = C4D 2 170 = A69A 6
60 = DFD 1 120 = ADE9 5
    
```

◀ From Page 141

nessmen, each of whom uses a Master 128 with a 3.5in disc drive, a set-up both prefer to conventional drives. However, like most of us, they would also like to be able to play a few games.

Now it should theoretically be possible to use games designed for the Compact on this combination, but in practice this is not always the case, because of a few subtle differences between the two machines.

Superior very kindly sent me Compact versions of a number of their games. I tried them, and any others I could get hold of, on my Master 128 with a borrowed 3.5in drive — to a rather mixed reception.

Bonecruncher, **Elixir**, **Palace of Magic** and **Spellbinder** all worked without a hitch. **Play it Again Sam** also worked perfectly, apart from the Stryker's Run bug mentioned earlier, but the given cure works just as well on a Master 128.

There was a peculiar problem with **Life of Repton**. On a Master 128 or Compact, both parts of the game are loaded into sideways ram. When the Compact version is loaded into a Master 128, however, the editor loads perfectly but the game itself seems to get lost somewhere along the way. When you press Break to switch between the two, you are presented either with the editor (as normal) or a blank screen. Strange...

The other six, **Codename:Droid**, **Crazee Rider**, **Elite**, **Grand Prix Construction Set**, **Revs** and the original stand-alone **Stryker's Run** all failed to load, coming up with the message:

```

!!DISC FAULT!!
UNABLE TO LOAD
    
```

This message is actually generated by the protection system if — for any reason — it decides that all is not as it should be. I asked Rob Northen, the author of the protection systems used on these games — and on all but the very latest of Superior's Compact releases — if he knew of any compatibility problems with these games. His answer was that all the protection systems used on the games were written using a Master 128 and 3.5in disc drive — the exact combination on which these games are now failing to load.

Any ideas?

Nick Anderson has pointed out a peculiarity in the Compact version of Superior's **Grand Prix Con-**

struction Set. Although the instructions say that self-designed circuits can be saved to a blank disc, attempting to do so generates the error message *Disc changed*. What is more, most people have the sense to make sure that any new game is write-protected before trying to boot it. If you try to save a track to the original program disc, you get the message *Disc protected*.

The problem is that **Grand Prix Construction Set** was originally written on a machine that uses the DFS filing system, not the ADFS system built into the Compact. The ADFS holds a copy of the currently selected disc catalogue in ram, and checks this catalogue before even thinking about accessing the disc.

So if you put a new disc into the drive, the ADFS will not realise that it is a new one until it is

Turn to Page 144 ▶

ROM PROBLEMS

One well-known point that has never previously gained a mention in these pages is that sideways roms can interfere with games and other software, causing them either to function incorrectly or simply not work at all. *Disc Doctor* is, rightly or wrongly, (in)famous for clashing with almost everything, but it is by no means the only one.

Something rather strange happens when last month's biggie, **Codename:Droid**, is loaded into a machine fitted with Computer Concepts' **Spellmaster** rom. When you, as Stryker, seek to penetrate the *Surface Defence*, you discover that all the ropes now have cyan and red spikes protruding from the left-hand side, making it impossible to jump on or off a rope from that side. The problem seems to occur just after you have accessed your wrist terminal, and terminal it certainly is.

Codename:Droid, like many programs, makes use of the OS read character routine *osrdch* to check for incoming characters, normally from the keyboard. The *osrdch* entry point &FFEO is indirected through the two-byte vector *rdchv* at &210 and &211. However, **Spellmaster** changes this vector, so any call to *osrdch* will have a different effect. Luckily simple problems usually have simple solutions.

Just enter this line before running the game:

```
ZX=!&FFB7:!!&210=ZX!&10
```

This short routine reads the default value of *rdchv* from the OS rom and pokes it back into &210 and &211, thereby disabling **Spellmaster's** side effect.

◀ From Page 143

*MOUNTed. The DFS, however, does not store a copy of the catalogue – instead it physically accesses the disc every time you issues a disc-specific command. Therefore no *MOUNT

DROID ADDITION

When I originally wrote the solution to Codename:Droid I decided to feature it in the April column because it would appear a few days after the closure of the competition associated with the game. The idea was to keep everyone happy by featuring hints and cheats for a popular and still fairly recent game, but to prevent cheating in the competition. However, since I finished that column, it has been brought to my attention that Commander Stryker is by no means finished yet.

By the time you come to read this, Superior's new compilation, **Play It Again Sam II**, should be in the shops featuring, of course, Codename:Droid. At the time of writing I have not seen Play It Again Sam II, but I would be surprised if the cheat routines given last month actually work on the versions of Codename:Droid on Sam II, because the loaders will almost certainly be different.

I have received quite a few letters pointing out that pokes given for games that have since appeared on the original Play It Again Sam do not work with the versions on this compilation. This is because all the Sam I games have loaders slightly different to those of the original stand-alone games. Watch this space...

command is needed or even exists. The problem is now quite clear: The Compact version of Grand Prix Construction Set should, but doesn't, issue a *MOUNT command before attempting to load or save a newly-designed track. The only possible solution to this problem goes against all the rules – you actually have to save the new tracks on to the game disc.

I think that the method I am about to outline – Nick's own – although by no means the only one, is probably the neatest.

First, make sure that the write-protect catch on the disc is set to *write-enable*, so that the hole is covered up. Then insert the disc into the drive and type:

```
*MOUNT
*CDIR T
```

This creates a directory T, which can be used for storing your own tracks. So, if you have just designed a replica of the US Watkins Glen circuit, simply save it as T.WATGLEN.

You could call the new directory something like TRACKS, but this would mean that the actual filenames would have to be shorter and therefore less meaningful.

Lastly, I must stress that this is an extreme exception. In general you should *never* save anything onto the original program disc – you will almost certainly do it irreparable damage. You have been warned . . .

SOLID STATE PARALLEL

PRINTSHARER/PRINTERCHANGER/PRINTERCROSSOVER
OUR SOLID STATE DATA SWITCHES CAN USE CABLES
AS LONG AS 30M ON INPUT AND OUTPUT WITHOUT ANY
DATA LOSS/ERROR

SPECIAL OFFER FOR BBC USERS

FREE INPUT CABLES

PRINTERSHARER

(SEVERAL MICROS TO 1 PRINTER)

3 WAY – 26 PIN – £60 (a) (3 × 6FT INPUT CABLES FREE)
6 WAY – 26 PIN – £110 (b) (6 × 6FT INPUT CABLES FREE)

PRINTERCHANGER

(1 MICRO TO SEVERAL PRINTERS)

3 WAY – 26 PIN – £60 (a) (1 × 6FT INPUT CABLE FREE)
6 WAY – 26 PIN – £110 (b) (1 × 6FT INPUT CABLE FREE)

PRINTERCROSSOVER

(2 MICROS TO 2 PRINTERS)

26 PIN – £70 (2 × 6FT INPUT CABLES FREE)

FOR IBM & COMPATIBLES

PRINTERSHARER/PRINTERCHANGER

WITHOUT INPUT CABLES

WITH INPUT CABLES

2 WAY £70 (a)

2 WAY £90 (b)

3 WAY £80 (a)

3 WAY £110 (b)

6 WAY £140 (c)

6 WAY £200 (c)

**FOR SERIAL & PARALLEL SMART & BUFFERED SWITCHES
& INLINE BUFFERS, PLEASE CONTACT**

CUSTOM CABLE-MAKING SERVICE AVAILABLE

Add Postage: (a) £4.00 (b) £6.00 (c) £7.50 + 15% V.A.T.



KEYZONE COMPUTER PRODUCTS LTD
U14, Acton Business Centre,
School Road, London NW10 6TD
Telephone 01-965 1684/1804 Telex: 8813271 GECOMS G



DRAM

ELECTRONICS LTD.

**OFFICIAL
ACORN
SPARES
DISTRIBUTOR**

Please phone for prices
Dealer Enquiries Welcome

DRAM ELECTRONICS LTD.

Unit 12, Kingston Mill, Chestergate,
Stockport SK3 0AL.

Tel: 061-429 0626. Tlx: 312242

◀ From Page 37

```

10 REM The Sky at Night
20 REM by Bernard Mitchell
30 REM (c) The Micro User
40 PROCreloc(&E00):MODE 1
50 PROCinit:FOR IX=0 TO NX-1
60 KX=VAL("FN_"+AS(IX)):NEXT
70 IX=0:REPEAT PROCflash(AS(IX))
80 IX=(IX+1)MODNX:UNTIL FALSE:END
90 DEF FN_Orion
100 VDUMX;750;370;DX,MX;840;360;DX
110 VDUMX;790;410;CX,MX;800;374;CX
120 VDUMX;790;360;BX,MX;780;350;BX
130 VDUMX;800;320;BX,MX;800;350;AX:=0
140 DEF FN_Pleiades
150 VDUMX;800;660;FX:=0
160 DEF FN_Ursa_major
170 VDUMX;400;620;CX,MX;380;580;BX
180 VDUMX;340;600;BX,MX;350;630;AX
190 VDUMX;340;660;CX,MX;330;690;BX
200 VDUMX;300;720;CX:=0
210 DEF FN_Ursa_minor
220 VDUMX;470;740;CX,MX;460;760;AX
230 VDUMX;440;770;AX,MX;420;770;AX
240 VDUMX;400;760;BX,MX;380;780;AX
250 VDUMX;410;790;AX:=0
260 DEF FN_Cassiopeia
270 VDUMX;610;830;BX,MX;630;820;BX
280 VDUMX;620;800;BX,MX;640;790;BX
290 VDUMX;650;770;AX,MX;640;760;AX
300 VDUMX;600;810;AX:=0
310 DEF FN_Cepheus
320 VDUMX;520;840;AX,MX;550;870;AX
330 VDUMX;510;890;AX,MX;570;910;AX
340 VDUMX;530;930;BX:=0
350 DEF FN_Andromeda
360 VDUMX;720;790;BX,MX;680;830;AX
370 VDUMX;730;840;BX,MX;710;850;AX
380 VDUMX;740;880;AX,MX;720;880;AX
390 VDUMX;740;930;AX,MX;690;970;BX:=0
400 DEF FN_Aries
410 VDUMX;820;820;CX,MX;830;840;BX
420 VDUMX;850;850;BX:=0
430 DEF FN_Perseus
440 VDUMX;680;700;BX,MX;670;690;AX
450 VDUMX;670;710;AX,MX;690;710;AX
460 VDUMX;680;730;BX,MX;670;750;AX
470 VDUMX;700;740;AX,MX;720;740;AX
480 VDUMX;730;750;CX,MX;740;760;AX
490 VDUMX;710;710;AX,MX;730;700;AX
500 VDUMX;750;710;BX,MX;760;720;AX:=0
510 DEF FN_Auriga
520 VDUMX;630;530;CX,MX;640;570;DX
530 VDUMX;650;510;BX,MX;700;520;BX
540 VDUMX;710;570;BX,MX;660;570;AX
550 VDUMX;650;590;AX,MX;670;590;AX:=0
560 DEF FN_Taurus
570 VDUMX;700;520;BX,MX;740;490;BX
580 VDUMX;790;570;DX,MX;800;580;AX
590 VDUMX;790;600;AX,MX;780;590;AX
600 VDUMX;770;580;AX:=0
610 DEF FN_Gemini
620 VDUMX;530;410;CX,MX;540;440;CX
630 VDUMX;550;400;AX,MX;560;430;BX
640 VDUMX;570;390;AX,MX;590;420;AX
650 VDUMX;590;370;AX,MX;600;390;CX
660 VDUMX;610;430;AX,MX;620;440;AX:=0
670 DEF FN_Eridanus
680 VDUMX;870;430;BX,MX;910;460;BX
690 VDUMX;910;510;AX,MX;930;530;AX
700 VDUMX;980;560;AX,MX;950;580;AX
710 VDUMX;970;630;AX,MX;980;650;BX:=0
720 DEF FN_Cetus
730 VDUMX;910;740;BX,MX;890;750;AX
740 VDUMX;880;780;AX,MX;890;800;AX

```

```

750 VDUMX;910;790;AX,MX;930;770;AX:=0
760 DEF FN_Monoceros
770 VDUMX;480;190;AX,MX;500;210;AX
780 VDUMX;520;200;AX,MX;540;210;AX
790 VDUMX;630;280;AX,MX;660;260;AX
800 VDUMX;640;260;AX,MX;600;210;AX
810 VDUMX;670;220;AX,MX;650;200;AX
820 VDUMX;570;190;AX,MX;550;170;AX
830 VDUMX;560;150;AX:=0
840 DEF FN_Canis_minor
850 VDUMX;560;250;DX,MX;580;260;BX:=0
860 DEF FN_Canis_major
870 VDUMX;640;150;AX,MX;670;160;DX
880 VDUMX;700;170;CX,MX;660;120;AX
890 VDUMX;650;100;CX,MX;630;70;BX
900 VDUMX;660;80;CX,MX;710;100;AX:=0
910 DEF FN_Puppis
920 VDUMX;480;80;BX,MX;500;100;BX
930 VDUMX;510;90;AX,MX;530;80;AX
940 VDUMX;520;60;BX,MX;490;40;BX
950 VDUMX;560;40;BX:=0
960 DEF FN_Pyxis
970 VDUMX;420;80;AX,MX;430;50;AX
980 VDUMX;450;40;AX:=0
990 DEF FN_Hydra
1000 VDUMX;150;250;AX,MX;190;230;BX
1010 VDUMX;240;220;AX,MX;290;210;CX
1020 VDUMX;330;230;AX,MX;260;230;AX
1030 VDUMX;410;220;BX,MX;430;200;AX
1040 VDUMX;420;180;AX,MX;390;190;AX
1050 VDUMX;390;210;AX:=0
1060 DEF FN_Cancer

```

```

1070 VDUMX;400;370;AX,MX;410;340;AX
1080 VDUMX;410;310;AX,MX;380;270;AX
1090 VDUMX;460;360;AX,MX;450;280;AX
1100 VDUMX;440;310;FX:=0
1110 DEF FN_Sextans
1120 VDUMX;240;260;AX,MX;240;310;AX
1130 VDUMX;260;330;AX,MX;270;300;AX:=0
1140 DEF FN_Leo
1150 VDUMX;180;490;BX,MX;200;460;AX
1160 VDUMX;220;480;BX,MX;260;400;CX
1170 VDUMX;280;420;AX,MX;270;440;CX
1180 VDUMX;290;450;AX,MX;310;440;BX
1190 VDUMX;310;420;AX:=0
1200 DEF FN_Crater
1210 VDUMX;50;450;AX,MX;60;420;AX
1220 VDUMX;90;410;AX,MX;90;380;AX
1230 VDUMX;110;420;AX,MX;130;440;AX
1240 VDUMX;130;470;AX:=0
1250 DEF FN_Virgo
1260 VDUMX;100;630;BX,MX;80;630;AX
1270 VDUMX;60;620;BX,MX;70;590;AX
1280 VDUMX;80;550;AX,MX;100;550;AX:=0
1290 DEF FN_Leo_minor
1300 VDUMX;280;540;AX,MX;290;510;AX
1310 VDUMX;310;500;AX,MX;310;530;AX:=0
1320 DEF FN_Bootes
1330 VDUMX;160;790;DX,MX;150;820;BX
1340 VDUMX;150;770;AX,MX;130;760;AX
1350 VDUMX;200;820;BX,MX;200;790;AX
1360 VDUMX;240;840;AX,MX;260;810;AX
1370 VDUMX;240;780;BX:=0
1380 DEF FN_Lynx
1390 VDUMX;450;480;AX,MX;460;500;AX
1400 VDUMX;480;550;AX,MX;510;560;AX
1410 VDUMX;530;580;AX,MX;550;600;AX:=0

```



Turn to Page 146 ▶

10 = 00	390 = 3314 5	770 = 42E6 5	1150 = 5414 4	1530 = D3A7 F	1910 = FB03 1
20 = 00	400 = 8C65 C	780 = 2B03 7	1160 = F04C A	1540 = BFE3 2	1920 = 420 1
30 = 00	410 = 9BDA 8	790 = 979F F	1170 = 9428 1	1550 = 229B F	1930 = 46EF 4
40 = B84E E	420 = 50EC 5	800 = F5E2 2	1180 = CDC0 D	1560 = 4644 F	1940 = BF0C 6
50 = 7B23 7	430 = A329 D	810 = CF72 1	1190 = 51D 4	1570 = 4BB9 3	1950 = 51F8 2
60 = F4B8 E	440 = 33CE F	820 = 3267 5	1200 = B8D4 2	1580 = E66F 5	1960 = 3721 8
70 = 7045 0	450 = 24D F	830 = E02C 6	1210 = A73 4	1590 = FFC0 3	1970 = 49AB F
80 = 702A 3	460 = 8F45 A	840 = 2281 C	1220 = 158D 0	1600 = 62FF A	1980 = 8097 E
90 = 6F9A 5	470 = C0F7 7	850 = 8354 D	1230 = FB5F 4	1610 = A1EC 8	1990 = 66B1 0
100 = 1C25 7	480 = EF97 2	860 = 7B82 0	1240 = C18F 1	1620 = E2A6 C	2000 = 5AB4 0
110 = E14D 7	490 = 51D9 C	870 = 3E52 A	1250 = EC1E D	1630 = 56C4 C	2010 = F6E1 E
120 = 3962 9	500 = E37E 5	880 = FCFA 1	1260 = DA6E 1	1640 = 8C93 2	2020 = 85D3 F
130 = BC25 B	510 = 9139 9	890 = CD4D A	1270 = 4188 0	1650 = 1117 2	2030 = F5FD A
140 = 4EF7 5	520 = E653 F	900 = 49D3 D	1280 = E9B4 5	1660 = 726D A	2040 = 4D8C E
150 = 6C49 B	530 = D628 4	910 = EFFB 0	1290 = EA59 3	1670 = 485D 7	2050 = 4922 5
160 = 2881 0	540 = C2EF 2	920 = 57B9 4	1300 = 3679 2	1680 = 4C67 B	2060 = E00F 8
170 = 1FBD E	550 = 4673 4	930 = BAB3 E	1310 = 7EBC E	1690 = C988 0	2070 = D028 8
180 = 33FD 6	560 = F03D D	940 = 923D 7	1320 = 6A2F 6	1700 = EA61 6	2080 = 92A2 9
190 = 36AC 9	570 = 479D B	950 = 6B1 D	1330 = 8DEF 3	1710 = ED0F 3	2090 = F842 0
200 = 6FAF 2	580 = 1CEA E	960 = 04F 9	1340 = 3DE4 C	1720 = 5A45 6	2100 = 9CFA B
210 = 7182 F	590 = 85C9 C	970 = 8338 A	1350 = 3778 6	1730 = 3E35 2	2110 = AD4E F
220 = 9B28 4	600 = 71D1 8	980 = 93EC E	1360 = 229E 1	1740 = 6D91 D	2120 = 270E 8
230 = 30E2 8	610 = EC5B 2	990 = D0C0 A	1370 = 1C35 5	1750 = 52CF 3	2130 = 7809 3
240 = 1426 E	620 = A5D0 C	1000 = A819 2	1380 = 29B8 1	1760 = A87A C	2140 = 6D31 C
250 = 34FE A	630 = E73F 6	1010 = 6875 9	1390 = D166 8	1770 = 606E C	2150 = 4B23 9
260 = C9B2 9	640 = 8C47 E	1020 = 10CC 2	1400 = 8BD 3	1780 = DE9D 7	2160 = 4B39 2
270 = ACBE A	650 = 9F96 A	1030 = 832D 6	1410 = 7026 C	1790 = 4BC0 E	2170 = B3DA 6
280 = E9F4 3	660 = 844B D	1040 = 337A 8	1420 = 7F88 3	1800 = 34DE A	2180 = A5E6 9
290 = 15BC C	670 = D025 F	1050 = 8C48 8	1430 = CF75 A	1810 = 4BC9 9	2190 = BDA5 D
300 = 3BC3 3	680 = 81D0 8	1060 = 4041 A	1440 = CE04 F	1820 = 44E5 A	2200 = F124 2
310 = DEB 6	690 = 7CEA E	1070 = A714 C	1450 = DB71 1	1830 = 74B9 2	2210 = B254 7
320 = 15B7 C	700 = 8DB2 7	1080 = 534B F	1460 = B229 7	1840 = 9ECD 5	2220 = 6626 A
330 = F2D6 7	710 = E50C D	1090 = 6574 8	1470 = 8CC8 8	1850 = BB77 0	2230 = DB24 5
340 = 7BAE D	720 = 802D 8	1100 = DFBE 3	1480 = 5F99 B	1860 = F2F8 F	2240 = 1884 D
350 = D28A 9	730 = AFD9 9	1110 = 6F61 4	1490 = F096 F	1870 = 256E A	2250 = 9F6E 0
360 = C698 5	740 = 33D2 E	1120 = 5D9B B	1500 = 50B5 A	1880 = BB6 6	2260 = E2E5 5
370 = F011 B	750 = 4851 2	1130 = 3A4D 9	1510 = 43DF C	1890 = C92 4	2270 = FD2E 1
380 = E753 B	760 = 4DEA 5	1140 = 9D81 6	1520 = AD03 E	1900 = 8C83 7	

◀ From Page 145

```

1420 DEF FN_Draco
1430 VDUMX;370;720;AX,MX;350;740;AX
1440 VDUMX;330;770;AX,MX;320;830;AX
1450 VDUMX;330;860;AX,MX;370;870;AX
1460 VDUMX;410;850;AX,MX;440;880;AX
1470 VDUMX;430;920;BX,MX;410;950;AX
1480 VDUMX;380;960;AX,MX;390;980;BX
1490 VDUMX;350;970;BX:=0
1500 DEF FN_Corona
1510 VDUMX;230;900;BX,MX;230;880;AX
1520 VDUMX;220;870;AX,MX;210;890;AX
1530 VDUMX;220;910;AX:=0
1540 DEF FN_Canes_Venatici
1550 VDUMX;260;670;BX,MX;280;650;AX:=0
1560 DEF FN_Coma_Berenices
1570 VDUMX;200;630;EX:=0
1580 DEF PROCdelay:*FX15,1
1590 LOCAL TX:TX=TIME+1000
1600 REPEAT UNTIL TIME>TX OR INKEY-99
1610 REPEAT UNTIL NOT INKEY-99:ENDPROC
1620 DEF PROCflash(AS):DS="FN."+AS
1630 GCOL0,3:XX=EVALDS
1640 PROCname(AS,2):PROCdelay
1650 GCOL0,2:XX=EVALDS
1660 PROCname(AS,1):ENDPROC
1670 DEF PROCname(AS,CX):GCOL 0,CX
1680 LOCAL KX:KX=INSTR(AS,"")
1690 PROCT(800,900,LEFTS(AS,KX-1))
1700 IF KX PROCT(960,840,MIDS(AS,KX+1))
    
```

```

1710 ENDPROC
1720 DEF PROCT(IX,JX,TS):MOVE IX,JX
1730 PRINT TS:ENDPROC
1740 DEF PROCinit:*FX9,20
1750 MX=1049:NX=32:*FX10,20
1760 DIM AS(NX-1)
1770 FOR IX=0 TO NX-1:READ AS(IX):NEXT
1780 VDU19,0,4,0,0;19,1,4,0,0;
1790 VDU19,3,8,0,0;5
1800 GCOL 0,129:CLG:GCOL 0,0
1810 XX=520:RX=500:MOVEXX,1020:P=PI/15
1820 FOR A=0 TO 2*PI+P STEP P
1830 DRAW XX+RX*SINA,XX+RX*COSA:NEXT
1840 FOR YX=20 TO 1020 STEP 4
1850 PLOT 77,XX,YX:NEXT
1860 VDU19,0,0;0;
1870 AX=224:BX=225:CX=226
1880 DX=227:EX=228:FY=229
1890 VDU23,AX,0;0;8,0,0;
1900 VDU23,BX,0;0;24,0,0;
1910 VDU23,CX,0;0;24,24,0,0;
1920 VDU23,DX,0;0;24,60,24,0;
1930 VDU23,EX,0,34,136,36,8,34,64,0
1940 VDU23,FY,0;16,36,16,40,0;
1950 GCOL 0,2
1960 PROCT(800,980,"Constellation")
1970 PROCT(40,980,"Night")
1980 PROCT(40,940,"Sky")
1990 PROCT(40,40,"Jan-Apr")
2000 PROCT(XX,1010,"N")
2010 PROCT(10,XX,"E")
    
```

```

2020 PROCT(1000,XX,"W")
2030 PROCT(XX,40,"S")
2040 PROCT(800,80,"Press Space Bar")
2050 PROCT(840,40,"to continue")
2060 ENDPROC
2070 DATA Andromeda,Aries,Auriga
2080 DATA Bootes,Cancer,Canes_Venatici
2090 DATA Canis_major,Canis_minor
2100 DATA Cassiopeia
2110 DATA Cepheus,Cetus,Coma_Berenices
2120 DATA Corona,Crater,Draco,Eridanus
2130 DATA Gemini,Hydra,Leo,Leo_minor
2140 DATA Lynx,Monoceros,Orion,Perseus
2150 DATA Pleiades,Puppis,Pyxis
2160 DATA Sextans,Taurus,Ursa_major
2170 DATA Ursa_minor,Virgo
2180 DEF PROCreloc(QX):PX=PAGE
2190 IF PX<=QX OR PX>80000 ENDPROC
2200 CLS:MX=TOP-PAGE:VDU129,136
2210 PRINT"Relocating...":*TAPE
2220 FOR LX=0 TO MX STEP 4
2230 SOUND&11,-7,255*LX/MX,2
2240 LX!QX=LX!PX:NEXT:PAGE=QX
2250 *KEYB"OLDIMRUNIFIM"
2260 VDU21:*FX138,0,128
2270 END
    
```

This listing is included in this month's tape & disc offer. See order form on Page 159.

contex

BANK MANAGER for disc systems only

The most advanced and versatile personal bank account management program available for all BBC computers. Consistently acclaimed!

"data entry is a delight... professional... excellent product" Micro User April 86

Enter cheques and receipts. Standing orders any frequency. Automatic date sequencing. Reconcile statements. Search, amend and delete. Unreconcile. Move forwards or backwards. Analyse expenditure. Forward cash flow forecast. Up to 36 simultaneous 'bank' (bank credit cards, savings, cash) accounts online simultaneously, inter-account transfers, 9999 standing orders, 99 analysis categories. 12 actual and 12 budgets per category, over 4,000 postings on an 80k disc. Reports to screen or printer. Graphics. Foreign currency support. Password. File recovery. Auto exec file. Field editing. Itemised look ahead. Programmable report writer.

Standard Bank Manager for the BBC B, B+ £17.50

BANK MANAGER MASTER for disc systems only

Version 2 now available. Includes all of the facilities of the Standard Bank Manager plus ADFS file system support, shadow screens, uses sideways RAM, 40 or 80 column screen reports. Improved graphics, m/c windows, function key support and onscreen labels, additional functions added to the already extensive report facilities.

Bank Manager Master for the MASTER and MASTER COMPACT £22.50

For the ARCHIMEDES (all models) £25.00
phone for upgrade prices

BANK MANAGER BUSINESS UTILITIES for disc systems only

For the 'professional' who also use the BANK MANAGER to control the business accounts the BUSINESS UTILITIES add double entry trial balance and programmable spreadsheet analysis reports. Generated from cheque and cash transactions keyed into BANK MANAGER. Just pass the reports to your accountant! Available for all BANK MANAGER versions state which.

Bank Manager Business Utility Pack 1 £12.00

TYPING TUTOR

Quickly learn to touch type. Over 90 smoothly graded lessons graduate you from the basic home keys to complete keyboard mastery. Unique word scan line checking. Target WPM and percentage correct. You may revise the targets or lessons as required. Audio key click for positive key depression. Establish a typing rhythm using the automatic metronome. Free format option. Disc version includes several enhancements e.g. on screen keyboard, exact mode, on screen parameters. Recommended.

Cassette £12.50

Disc for BBC B, B+, Master and Compact £12.50

Disc for Archimedes (all models) £15.00

Archimedes is a trademark of Acorn Computers Ltd
ALL PRICES FULLY INCLUSIVE FREE POSTAGE WITHIN UK
Enquiries and Access Credit card orders telephone 023 03 347



CONTEX COMPUTING 15 Woodlands Close, Cople, Bedford MK44 3UE

Please rush me on cassette/disc

40k 80k 3.5" 5.25"
I have a BBC B B+ Master Compact Archimedes

Enclosed £ or debit my Access card no

Name

Address

M5

FAST DELIVERY

Children (of all ages) playing games on BBC model B's?
You need:

SOUND VOLUME CONTROL and HEADPHONE SOCKET

Model B only

Easily fitted - no soldering

Price **£6.90** (incl. VAT & p&p)

From:

Cantocks Enterprises Ltd

25 Hillside Avenue, Midsomer Norton, Bath BA3 2LT

COMPUTER FAULTY?

Contact Conistan Electronics
Acorn, BBC Repair Specialists

****Sensible Prices, Rapid Repairs****
****4 Months, YES 4 Months Warranty****
****Free Local Collection/Delivery****

Please note, we also repair:

Amstrad, Commodore, Sinclair, Microvitec, Cumana Products

CONISTAN ELECTRONICS,

Unit 14, Moorland Business Centre, Balme Road, Cleckheaton,
W. Yorks. Tel: Paul on (0274) 877899

CONISTAN THE NAME TO TRUST IN YORKSHIRE

◀ From Page 95

```

200 DEF PROCkeys
210 FOR AX=0 TO 1:VDU141,129,157,135
220 PRINTSPC10"Chinese chess":NEXT
230 PRINTTAB(13)"by Daniel Tang"
240 PRINT"SPC2"Keys :":YX=VPOS-2
250 FOR AX=1 TO 5:READAS
260 PRINTTAB(12,AX*2+YX)AS:NEXT
270 FOR AX=8900 TO &B3F STEP 4
280 READ AS:AX=VAL("&"+AS):NEXT
290 PRINTTAB(11,23)"Press space";
300 REPEATUNTILGET=32:ENDPROC
310 DEF PROCchars
320 PRINTTAB(13,1)"The characters"
330 FOR CX=1 TO 8
340 PROCpchar(3,CX+1,CX)
350 NEXT:VDU5
360 FOR YX=886 TO 146 STEP-96
370 MOVE610,YX:PRINT"-
380 READ AS:MOVE800,YX

```

```

390 PRINTAS:NEXT:VDU4,31,10,30
400 PRINT"How many players? (1/2)";
410 REPEAT AS=GETS
420 UNTIL INSTR("12",AS)>0
430 KX=VALAS:ENDPROC
440 DATA Z - Left,X - Right,* - up
450 DATA ? - down,Return - select
460 DATA 0,30110C03,C0400000,3E604040
470 DATA 0,0,C3A023C,705,3,604040C0
480 DATA 3060C080,10101010,70300,10100
490 DATA FFF020,C0200FF8,20E02030,8040
500 DATA 1010100,1070105,4FC0400
510 DATA 4AF2455,0,0,2020305,7030103
520 DATA 21030605,A0369C40,80000000
530 DATA 80808080,7030C0E,0,FFE020E0
540 DATA F01F00,D870C080,F018,0,0,0
550 DATA 0,0,190F0000,27F6134,80000000
560 DATA 4000FFC0,3010000,101CFE07
570 DATA 2E1B0702,38,E33E80,0,15EA7C18
580 DATA F,0,1B0E0800,0,C3000000,0
590 DATA FE000000,7EE0E830,1010183,17E

```

```

600 DATA 4ECB8804,4311F103,69C98DC7
610 DATA 1C0F0603,1,6772D158,C0
620 DATA 70D868A9,E0,3000000,180D0406
630 DATA F0000000,820031E,0,70C08000
640 DATA 406C2032,2396D57,88C80D47
650 DATA C14346BC,94048C18,18084C04
660 DATA 705,0,DF4F,3F,3010F030,E0,0,0
670 DATA 0,0,0,0,57643808,40C3861,0
680 DATA 924992FF,0,12367CC0,6070505
690 DATA C,C18181FF,C3,B0F153D2,B0,0,0
700 DATA 0,0,0,78180000,3E000000
710 DATA 742BDD2B,0,FF0000,30604040
720 DATA 30E03010,E06041C,191F
730 DATA FE830000,C140,ECD81010,DCF4
740 DATA 0,8070000,0,C0000000,0
750 DATA 5020000,A0901208,C36678A9
760 DATA 2040705F,8000C020,81EF281
770 DATA 10180808,362C1C0,0,51D15FC0
780 DATA 70,D050D010,70
790 DATA Mouse,Cat,Dog,Wolf,Leopard
800 DATA Tiger,Lion,Elephant

```

10 = 00	130 = AD1E F	250 = 225E 4	370 = D55A 3	490 = 268E 7	610 = F195 9
20 = 00	140 = 7109 8	260 = 4C31 8	380 = B1E 4	500 = 3F66 0	620 = 3A5A E
30 = 00	150 = 859D 6	270 = 455E 6	390 = A356 C	510 = 33D1 B	630 = A83F 3
40 = FF67 7	160 = B5D3 5	280 = FCAE E	400 = 764E 9	520 = 1650 F	640 = 67F4 D
50 = FF39 C	170 = 6D49 F	290 = 51CB D	410 = ADFB A	530 = 58B8 A	650 = F616 6
60 = F716 7	180 = A476 1	300 = 54BD 0	420 = B4CF A	540 = B52C 5	660 = CC03 4
70 = A5F8 A	190 = E062 0	310 = B300 6	430 = D15F A	550 = 7A38 5	670 = 9FAA F
80 = 285D 2	200 = 2EDA 0	320 = 4B76 F	440 = 5F9C A	560 = E6E7 4	680 = F696 A
90 = AD21 E	210 = 1995 9	330 = 8639 C	450 = AA1 C	570 = CA43 8	690 = EDA8 E
100 = A48A 1	220 = 16C E	340 = D42B F	460 = 5CEF C	580 = D44E F	700 = 60D0 3
110 = A6CC F	230 = 6457 1	350 = D972 A	470 = 3647 A	590 = 2A56 A	710 = 33E6 4
120 = 513F C	240 = F85E 5	360 = 7048 5	480 = 9E86 B	600 = 41F8 A	720 = 71CB D
					730 = 753C 2
					740 = C9E9 2
					750 = 6608 4
					760 = 2C92 7
					770 = 2B08 C
					780 = 5E33 4
					790 = 8CA8 9
					800 = 424C B



Listing II

```

10 REM Chinese chess
20 REM By Daniel Tang
30 IFPAGE<&E00GOTO1800
40 MODE1:VDU23;8202;0;0;0;19,2,6,0,0,
0:*FX11,10
50 PROCboard:DIMC$(8,10):nm%=8:PROCse
tchars:PRINTTAB(33,4)"Move."
60 IF KX=1 PROCone ELSE PROTwo
70 FORA=20TO150STEP10:SOUND1,-12,A,1:
NEXT
80 PRINTTAB(0,29)"Again? (y/n)";
90 REPEATAS=CHRS(GETAND&DF)
100 UNTIL INSTR("YN",AS)>0:PRINTAS;
110 IF AS="Y" RUN ELSE END
120 DEFPROCone:REPEAT:PRINTTAB(31,3)"
Your ":PROCusermove(128):IF(c$(4,9)<12
8ANDc$(4,9)>0)ORc$(4,1)>128GOTO140
130 PRINTTAB(31,3)" My ":PROCcomp
ove
140 UNTIL(c$(4,9)<128ANDc$(4,9)>0)ORc$(
4,1)>128
150 IFc$(4,1)>127PRINTTAB(31,6)"You wi
n"
160 IFc$(4,9)<127ANDc$(4,9)<>0PRINTTAB
(33,6)"I win"
170 ENDPROC
180 DEFPROTwo:REPEAT:PRINTTAB(31,3)"P
layer 1":PROCusermove(128):IF(c$(4,9)<12
8ANDc$(4,9)>0)ORc$(4,1)>128GOTO200
190 PRINTTAB(31,3)"Player 2":PROCuser
ove(0)
200 UNTIL(c$(4,9)<128ANDc$(4,9)>0)ORc$(
4,1)>128:PRINTTAB(31,6)"You win":IFc$(4
,1)>127PRINTTAB(31,7)"Player 1"
210 IFc$(4,9)<127ANDc$(4,9)<>0PRINTTAB

```

```

(31,7)"Player 2"
220 ENDPROC
230 DEFPROCprintchar(X$,Y$,CX):X$=X$-1
:Y$=Y$-1:IFCX>128CX=CX-128:cLX=2ELSEcLX=
1
240 MX=8FF+(72*(CX-1)):MX=&3008+(X$*6
4)+(Y$*8780):FORX=MXTOMX+8500STEP640:FO
RY=XXTOMX+32STEP16:FORCX=YXTOYX+7:WX=WX
+1:ZX=?WX
250 IFCX=2?CX=?CXEOR((ZXAND240)+(ZX/1
6)):?(CX+8)=?(CX+8)EOR((ZXAND15)*16)+(Z
XAND15)ELSE?CX=?CXEORZXAND240:?(CX+8)=?
(CX+8)EOR(ZXAND15)*16
260 NEXT,,:ENDPROC
270 DEFPROCusermove(CX)
280 IFCX=128PX=1:QX=0
290 IFCX=0PX=1:QX=8
300 GCOL3,7:FORAX=1TO2:X$=PX:Y$=9-QX
310 REPEAT:MOVEPX*128-128,QX*96+204:DR
AWPX*128,QX*96+204:*FX21,0
320 AS=GETS:MOVEPX*128-128,QX*96+204:D
RAWPX*128,QX*96+204:IFINKEY-67PX=PX+1
330 IFINKEY-98PX=PX-1
340 IFINKEY-73QX=QX+1
350 IFINKEY-105QX=QX-1
360 IFQX<0QX=0
370 IFQX>8QX=8
380 IFPX<1PX=1
390 IFPX>7PX=7
400 UNTILINKEY-74:REPEAT:UNTILINKEY-74
=0:IFc$(PX,9-QX)=0ANDAX=1GOTO310
410 SOUND1,-7,220,2:NEXT:QX=9-QX:PROCC
hek:IF(c$(X$,Y$)AND128)<>CXm%=1
420 IFm%=1PRINTTAB(31,3)"Illegal":SOU
ND2,-10,5,15:FORA=1TO1500:NEXT:GOTO280
430 PROCmc:SOUND1,-8,100,2:ENDPROC
440 DEFPROCchek:m%=0:IFYX>3ANDYX<7ANDc
$(X$,Y$)>5ANDc$(X$,Y$)<8AND(CX=1ANDPX=2
)OR(CX=7ANDPX=6))PX=4
450 IFYX>3ANDYX<7ANDc$(X$,Y$)>5ANDc$(X
$,Y$)<8ANDCX=4ANDPX=3PX=1
460 IFYX>3ANDYX<7ANDc$(X$,Y$)>5ANDc$(X
$,Y$)<8ANDCX=4ANDPX=5PX=7
470 IFABS(XX-PX)>10RABS(YX-QX)>1m%=1
480 IFABS(XX-PX)=1ANDABS(YX-QX)=1m%=1
490 IFm%=1ANDYX=QXANDABS(XX-PX)=3ANDYX
>3ANDYX<7AND((c$(X$,Y$)AND127)=7OR(c$(X$,
Y$)AND127)=6)m%=0
500 IFPX<1ANDPX<7ANDQX>3ANDQX<7ANDPX<>
4AND(c$(X$,Y$)AND127)<>1m%=1
510 IFPX>7ORPX<10RQX>9ORRQX<1m%=1
520 IF((PX=3AND(QX=10RQX=9))OR(PX=5AND
(QX=10RQX=9))OR(PX=4AND(QX=20RQX=8)))AND
c$(PX,QX)<>0m%=1
530 IF(c$(X$,Y$)AND127)=1AND(c$(PX,QX)
AND127)=8GOTO550
540 IF(c$(PX,QX)AND127)=c$(X$,Y$)AND
127)OR((c$(X$,Y$)AND127)=8AND(c$(PX,QX)A
ND127)=1)m%=1
550 IFC$(PX,QX)<>0AND(c$(X$,Y$)AND128)
=c$(PX,QX)AND128)m%=1
560 ENDPROC
570 DEFPROCcompmove:RX=4:SX=9:TX=0:EX=
0:IF(c$(3,9)<128ANDc$(3,9)<>0)OR(c$(5,9)
<128ANDc$(5,9)<>0)OR(c$(4,8)<128ANDc$(4,
8)<>0)denX=1:GOTO820
580 IF(c$(4,7)<128ANDc$(4,7)<>0)OR(c$(
2,9)<128ANDc$(2,9)<>0)OR(c$(6,9)<128ANDc
$(6,9)<>0)OR(c$(5,8)<128ANDc$(5,8)<>0)OR
(c$(3,8)<128ANDc$(3,8)<>0)denX=1:GOTO820
590 denX=0:YX=0:IFnmX<4GOTO630
600 IFc$(4,2)=0RX=4:SX=2:GOTO820
610 IFc$(3,1)=0RX=3:SX=1:GOTO820

```

Turn to Page 149 ▶

Fairhurst Instruments Ltd
Presents

ARTIST

The easy to use 256 colour art package
for the Acorn Archimedes

Features include :-

- * 256 Colours on screen at once.
- * Zoom/ pixel edit.
- * full screen editing.
- * Epson printer, area dumps.
- * save / load, screens & sprite areas.
- * Flip up/ down, left / right
- * Circle, Rectangle, Triangle, Spray, Rays, Fill, PLUS MANY More.....

THE easy to use art package, that makes use of the powerful graphics and colour available on your Archimedes. Ideal for Title screens, Backdrops, Scrolling areas & general graphic displays. Highly recommended for educational art departments. Ideal for the novice to the expert programmer.

SEND FOR YOUR COPY NOW!
ONLY £19.95

INC VAT - P&P

Fairhurst Instruments Ltd
Dean Court, Woodford Rd, Wilmslow, Cheshire. SK9 2LT.
Phone 0625-525 694 [6 lines]

TEACHERS SOFTWARE

(MU), 11 PARK VIEW, ALLER PARK,
NEWTON ABBOT, DEVON, TQ12 4NX
Software for the BBC B and Master. S.A.E. for leaflet



- | | | |
|---------------------|--|--------|
| 1. 3D CAD CUBE | Three years work by Great Britain's top paid games writers - at £14.95 it can't be bad! "Must be the cheapest solid modeller of all time", <i>CADCAM International</i> | £14.95 |
| 2. TO DESIGN A BOX | Currently our best seller, and used throughout all secondary schools in Devonshire. It works on several plotters. | £29.95 |
| NEW | | |
| 3. UNE SUPER BOITE* | A special French/English edition of the <i>To Design A Box</i> program. Channel tunnel technology bridging the gap! | £29.95 |
| NEW | | |
| 4. 3D CYLINDROID | Developed by the CAD-CUBE team, this offers solid and wire frame modelling at minimal cost. | £14.95 |
| NEW | | |
| 5. TECHNOGRID | Written to help you to produce technical borders, isometric and perspective grids etc. on the Plotmate A3M plotter. | £14.95 |
| 6. DI-EX 1. | A reading age developer for children aged 5-7 years with a dyslexic handicap. | £14.95 |
| 7. DI-EX 2. | A reading age developer for children aged 8-10 years with a dyslexic handicap | £14.95 |
| * BBC Master Only | We sell to schools, universities, industrial training units, and defence establishments | |

We are an expanding company seeking quality software for the BBC range of computers. Excellent royalties offered. Please submit material, preferably on 40 track, with brief instructions.

LIGHTSPEED SOFTWARE

31A Broadweir, Bristol BS1. Telephone: (0272) 225604
24 Hour Answer Phone for all enquiries

BBC DISC		BBC DISC		BBC CASSETTE		BBC CASSETTE	
TITLE	OUR PRICE	TITLE	OUR PRICE	TITLE	OUR PRICE	TITLE	OUR PRICE
Bonecruncher	10.00	Palace of Magic (Compact)	12.50	Apocalypse	7.50	Power Pack	7.75
Cholo	14.50	Paperboy	12.50	Arkanoid	7.25	Quest	7.75
Code Name Droid	10.75	Play It Again Sam 1 or 2	10.25	Bonecruncher	7.75	Round World 80 Screens	6.75
Code Name Droid (Compact)	12.50	Play It Again Sam (Compact)	12.50	Boulderdash	7.75	Scrabble	10.50
Colossus Chess 4.0	12.95	Quest	10.25	Citadel	7.75	Sentinal	7.75
Crazee Rider	10.50	Quest (Compact)	12.50	Code Name Droid	7.75	Spellbinder	7.75
Double Phantom	17.50	Repton 3 (Compact)	12.75	Colossus Chess 4.0	7.75	Star Wars	7.55
Elite	12.95	Revs +4 Tracks	12.50	Comp Hits 10 Vol 3	7.75	Strike Force Harrier	7.25
Elite (Compact)	17.50	Revs +4 Tracks (Compact)	17.50	Computer Hits 4	7.75	Strykers Run	7.75
Elixir	12.25	Scrabble	12.50	Computer Hits 5	5.35	The Quill	14.50
Firetrack	12.50	Spellbinder	12.25	Crazee Rider	7.75	Trivial Pursuits	12.25
Grand Prix	10.25	Strike Force Harrier	10.75	Elite	10.95	Winter Olympiad '88	7.75
Grand Prix (Compact)	12.50	Superior Coll V1 Com	12.50	Elixir	7.75		
Graphic Adv Creator	24.00	Superior Coll V2 Com	12.50	Firetrack	7.50		
Impact	9.95	Superior Coll Vol 1	10.50	Five Star Games 2	7.50		
Impossible Mission	10.50	Superior Coll Vol 2	10.50	Graphic Adventure Creator	16.50		
Life of Repton	6.25	Tetris	9.95	Impact	7.75		
Mini Office 40/80	14.50	The Quill	19.50	Konam's coin ops	7.50		
Mini Office 80T Master	17.50	Trivial Pursuits	17.50	Life of Repton	5.75		
Mini Office Master Com	18.75	Winter Olympics	10.50	Micropower Magic II	6.25		
Monopoly	12.50	Winter Olympiad '88	12.25	Mini Office II	12.50		
Palace of Magic	10.80			Monopoly	10.50		
				Palace of Magic	7.65		
				Paperboy	7.75		
				Phantom	6.25		
				Phantom Combat	7.75		
				Play It Again Sam 1 or 2	7.75		

SPECIAL OFFERS

	Cass	Disc
Quest Probe (Human Torch & Thing)	1.99	-
Impossible Mission	2.99	-
Psycastris	-	7.00
Baby Boomer Trivial Pursuit	7.00	-
Psycastris	3.50	-
Repton 3	5.00	-
747	2.99	-
The Big KO	2.99	-
World War I	-	7.99
Rev + 4 Tracks	8.50	-
Graham Gooch Test Cricket	-	7.50

All prices are inclusive of VAT and delivery inside the UK. Please make cheques P.O.'s payable to 'LIGHTSPEED SOFTWARE'
Orders normally despatched within 24 hours, but allow 7 days. All titles subject to availability.

◀ From Page 147

```

620 Ifc%(5,1)=0R%=5:S%=1:GOTO820
630 REPEAT:Y%=Y%+1:X%=0:REPEAT:X%=X%+1
:Ifc%(X%,Y%)>128ORc%(X%,Y%)=0GOTO710
640 PROCnext(X%,Y%):IFAX=1Q%=Y%+1:P%=X
%:PROCvl:EX=1:IFm%=0GOTO970
650 IFB%=1Q%=Y%:P%=X%+1:PROCvl:EX=1:IF
m%=0GOTO970
660 IFc%=1Q%=Y%-1:P%=X%:PROCvl:EX=1:IF
m%=0GOTO970
670 IFD%=1Q%=Y%:P%=X%-1:PROCvl:EX=1:IF
m%=0GOTO970
680 IFEXPROCnext(X%,Y%)
690 IFAX=20RB%=20RC%=20RD%=2PROCrunawa
y:IFm%=0GOTO970
700 EX=0
710 UNTILX%=7:UNTILY%=9:Y%=0:REPEAT:Y%
=Y%+1:X%=0:REPEAT:X%=X%+1:Ifc%(X%,Y%)>12
8ORc%(X%,Y%)=0GOTO810
720 IF(X%=3ANDY%=1)OR(X%=5ANDY%=1)OR(X
%=4ANDY%=2)GOTO810
730 PROCnear(X%,Y%):IFB%=1Q%=Y%:P%=X%+
1:PROCvl:IFm%=0GOTO970
740 IFc%=1Q%=Y%-1:P%=X%:PROCvl:IFm%=0G
OTO970
750 IFD%=1Q%=Y%:P%=X%-1:PROCvl:IFm%=0G
OTO970
760 IFCB%=10RCD%=1Q%=Y%-1:P%=X%:PROCvl
:IFm%=0GOTO970
770 IFAB%=10RAD%=1Q%=Y%+1:P%=X%:PROCvl
:IFm%=0GOTO970
780 IFCB%=10RAB%=1Q%=Y%:P%=X%+1:PROCvl
:IFm%=0GOTO970
790 IFCD%=10RAD%=1Q%=Y%:P%=X%-1:PROCvl
:IFm%=0GOTO970
800 IFAX=1Q%=Y%+1:P%=X%:PROCvl:IFm%=0G
OTO970
810 UNTILX%=7:UNTILY%=9
820 TX=0
830 EX=RND(2):O%=EXAND1:PROCnearest(R%
,S%,TX):TX=N%:REPEAT:EX=EXAND1:P%=X%:Q%=
Y%:IFEX=0ANDX%>R%P%=X%-1
840 IFEX=0ANDX%<R%P%=X%+1
850 IF(EX=10RXX=R%)ANDY%<S%Q%=Y%+1
860 IF(EX=10RXX=R%)ANDY%>S%Q%=Y%-1

```

```

870 IFEX=0ANDX%=4ANDY%=7ANDc%(4,8)<>0P
%=X%-1:Q%=Y%
880 IFEX=1ANDX%=4ANDY%=7ANDc%(4,8)<>0P
%=X%+1:Q%=Y%
890 EX=EXEOR1:PROCvl:Ifc%(P%,Q%)<128AN
Dc%(P%,Q%)<>0m%=1
900 IFP%=4ANDQ%=1m%=1
910 IFden%=1ANDc%(P%,Q%)=0m%=0
920 UNTILm%=0OREX=0%
930 IFEX=0%ANDm%=1ANDden%=1GOTO590
940 IFEX=0%ANDTX=100PROCmoveaway(0):GO
T0980
950 IFEX=0%ANDm%=1GOTO830
960 GOTO980
970 UNTILTRUE:UNTILTRUE
980 IFP%=X%ANDQ%=Y%PROCmoveaway(1)
990 PROCmc:SOUND1,-8,100,2:ENDPROC
1000 DEFPROCnext(EX,F%)
1010 IFEX=P%ANDF%=Q%L%=c%(P%,Q%):c%(P%,
Q%)=c%(X%,Y%)
1020 PROCcon(EX,F%+1,EX,F%):AX=U%:PROCc
on(EX+1,F%,EX,F%):BX=U%:PROCcon(EX,F%-1,
EX,F%):CX=U%:PROCcon(EX-1,F%,EX,F%):DX=U
%
1030 IFEX=P%ANDF%=Q%L%=L%
1040 ENDPROC
1050 DEFPROCnearest(A%,B%,TX):DX=0
1060 NX=100:FORQ%=1TO9:FORP%=1TO7
1070 IFD%=1AND((P%=3ANDQ%=1)OR(P%=5ANDQ
%=1)OR(P%=4ANDQ%=2))GOTO1100
1080 Ifc%(P%,Q%)<128ANDc%(P%,Q%)<>0ANDA
BS(P%-AX)+ABS(Q%-BX)=NXANDRND(2)=1X%=P%:
Y%=Q%
1090 Ifc%(P%,Q%)<128ANDc%(P%,Q%)<>0ANDA
BS(P%-AX)+ABS(Q%-BX)<NXANDABS(P%-AX)+ABS
(Q%-BX)>TXX%=P%:Y%=Q%:NX=ABS(P%-AX)+ABS(
Q%-BX)
1100 NEXT,
1110 IFD%=1ANDNX=100DX=2:GOTO1060
1120 IFD%=0AND((X%=3ANDY%=1)OR(X%=5ANDY
%=1)OR(X%=4ANDY%=2))DX=1:GOTO1060
1130 ENDPROC
1140 DEFPROCrunaway:AX=RND(4)
1150 IFAX=1Q%=Y%-1:P%=X%
1160 IFAX=2Q%=Y%:P%=X%+1
1170 IFAX=3Q%=Y%+1:P%=X%
1180 IFAX=4Q%=Y%:P%=X%+1

```



```

1190 Ifc%(P%,Q%)<>0GOTO1210
1200 PROCvl:IFm%=0ENDPROC
1210 FORS%=1TO4
1220 IFS%=1Q%=Y%-1:P%=X%
1230 IFS%=2Q%=Y%:P%=X%+1
1240 IFS%=3Q%=Y%+1:P%=X%
1250 IFS%=4Q%=Y%:P%=X%+1
1260 Ifc%(P%,Q%)<>0GOTO1280
1270 PROCvl:IFm%=0S%=5
1280 NEXT
1290 IFS%=5m%=1
1300 ENDPROC
1310 DEFPROCcon(X%,Y%,EX,F%):p%=0
1320 IFX%>7ORX%<1ORY%>9ORY%<1U%=0:ENDPR
OC
1330 IFF%>3ANDF%<7ANDc%(EX,F%)<8AND((EX
=1ANDX%=2)OR(EX=7ANDX%=6))X%=4:p%=1
1340 IFF%>3ANDF%<7ANDc%(EX,F%)<8ANDEX=4
ANDX%=5X%=7:p%=1

```

Turn to Page 150 ▶

10 = 00	270 = 8EAB 1	530 = C1E8 1	790 = 3BD1 8	1050 = 34E4 2	1310 = D114 E
20 = 00	280 = 6D25 A	540 = 42CC A	800 = C200 3	1060 = EB00 4	1320 = 24E9 0
30 = FAB6 6	290 = 1B11 F	550 = E27A 0	810 = BD55 A	1070 = 97DA 3	1330 = 8E94 3
40 = 75D2 4	300 = 2502 4	560 = ED0F 9	820 = 9766 0	1080 = 24DA E	1340 = A99D 6
50 = 96EC B	310 = 174A 0	570 = AE63 3	830 = D235 4	1090 = 1BD8 0	1350 = 57C3 0
60 = 1469 D	320 = FC23 F	580 = 655A 1	840 = C21E 3	1100 = 8300 7	1360 = 8FD2 C
70 = B0C4 C	330 = E30F E	590 = 3EEC 8	850 = DE4B 6	1110 = 294E 4	1370 = F7B2 5
80 = CA6A A	340 = 22A4 1	600 = DF02 7	860 = AA67 8	1120 = 4C44 A	1380 = 129D 5
90 = D125 A	350 = 4F71 2	610 = 744B 6	870 = 2501 5	1130 = ED0F 9	1390 = B3BB 0
100 = 36AC 2	360 = 6E78 3	620 = A303 F	880 = C2FF C	1140 = EDF2 7	1400 = FB88 D
110 = E424 3	370 = 661D 8	630 = 6F32 1	890 = 4F5C A	1150 = DF43 7	1410 = C866 A
120 = 1A6A B	380 = E56F A	640 = 9CED B	900 = D2F9 D	1160 = 703E 5	1420 = 2734 C
130 = FD6A 3	390 = C36C 5	650 = 245D 7	910 = 3E8F 9	1170 = A94A 4	1430 = EE6C C
140 = 41A3 6	400 = AFE 6	660 = 6F9 8	920 = C6E5 2	1180 = D1FF E	1440 = F77 C
150 = 13 3	410 = 16B9 2	670 = 4154 F	930 = A156 9	1190 = 13CA 7	1450 = D5F2 2
160 = E597 1	420 = D391 6	680 = 255C F	940 = E120 6	1200 = BD1A 4	1460 = 751B 1
170 = ED0F F	430 = 8500 7	690 = 7E2E 3	950 = B644 3	1210 = 537F 8	1470 = ED0F 2
180 = D8B5 F	440 = 933E A	700 = FA75 1	960 = 192 F	1220 = E086 6	1480 = 5B67 E
190 = 3DAA F	450 = 7427 5	710 = 1F8A 9	970 = 4081 9	1230 = 4FFB F	1490 = 303C 0
200 = D672 2	460 = D964 3	720 = 5FFC 2	980 = C61F 2	1240 = 968F 6	1500 = 8312 2
210 = BD40 5	470 = 1551 F	730 = D7E 4	990 = 8500 C	1250 = EE3A 4	1510 = EA67 2
220 = ED0F D	480 = 7125 8	740 = 3E97 7	1000 = F7DC 9	1260 = 6F73 6	1520 = A7B3 1
230 = 9828 5	490 = AB97 5	750 = 2A93 8	1010 = 5746 8	1270 = 34A6 1	1530 = 22DA 5
240 = 4236 F	500 = 9A71 B	760 = C1A7 6	1020 = B374 E	1280 = 2C83 D	1540 = ED0F B
250 = 8B62 0	510 = 722A 8	770 = C971 2	1030 = 45C9 9	1290 = F4D3 9	1550 = A84 8
260 = 96FC 5	520 = DC48 3	780 = E530 8	1040 = ED0F 3	1300 = ED0F 3	1560 = E0A2 4
					1570 = 7BF2 0
					1580 = 7C1B D
					1590 = 838B 6
					1600 = 2E0E D
					1610 = CDD 7
					1620 = D84C 5
					1630 = 8144 D
					1640 = D84C 0
					1650 = BBDD 3
					1660 = D84C 2
					1670 = 5FDD E
					1680 = D84C 4
					1690 = 85F 1
					1700 = ED0F 7
					1710 = FEA6 8
					1720 = 48C0 3
					1730 = 499A 9
					1740 = AD5E 7
					1750 = 6E87 7
					1760 = F76A 9
					1770 = 3AAC 3
					1780 = 8DBC 4
					1790 = 6953 2
					1800 = 46D0 7
					1810 = AD2E 9

Get it right!

◀ From Page 149

```

1350 IFFX>3ANDFX<7ANDcX(EX,FX)<8ANDEX=4
ANDX%=3X%=1:p%=1
1360 IF(cX(X%,Y%)AND127)<(cX(EX,FX)AND1
27)UX=1ELSEUX=2
1370 IF(cX(EX,FX)AND127)=1AND(cX(X%,Y%)
AND127)=8UX=1
1380 IF(cX(EX,FX)AND127)=8AND(cX(X%,Y%)
AND127)=1UX=2
1390 IFcX(X%,Y%)<128OR(cX(X%,Y%)AND127)
=(cX(EX,FX)AND127)UX=3
1400 IFcX(X%,Y%)=0UX=0
1410 IF((EX=3ANDFX=1)OR(EX=5ANDFX=1)OR(
EX=4ANDFX=2))ANDUX=2UX=3
1420 IF((EX=3ANDFX=9)OR(EX=5ANDFX=9)OR(
EX=4ANDFX=8))ANDUX=2UX=3
1430 IFFX>3ANDFX<7ANDEX<>1ANDEX<>4ANDE
X<>7ANDUX=2UX=3
1440 IFY>3ANDY<7ANDX<>1ANDX<>4ANDX
<>7ANDUX=1UX=3
1450 IFp%=1ANDcX(X%,Y%)<>134ANDcX(X%,Y%
)<>135ANDcX(EX,FX)<>6ANDcX(EX,FX)<>7UX=0
1460 IFp%=1ANDcX(X%,Y%)=136ANDUX=2UX=3
1470 ENDPROC
1480 DEFPROCmc:PROCprintchar(X%,Y%,cX(X
%,Y%)):PROCprintchar(P%,Q%,cX(X%,Y%))
1490 IFcX(P%,Q%)<>0PROCprintchar(P%,Q%,
cX(P%,Q%))
1500 IFcX(P%,Q%)<128ANDcX(P%,Q%)<>0nm%=
nm%-1
1510 cX(P%,Q%)=cX(X%,Y%):cX(X%,Y%)=0:EN

```

```

DPROC
1520 DEFPROCvl:PROCcchk:PROCnext(P%,Q%)
1530 IFAX=20RB%=20RC%=20RD%=2m%=1
1540 ENDPROC
1550 DEFPROCnear(EX,FX):PROCcon(EX,FX+2
,EX,FX):AX=UX:PROCcon(EX+2,FX,EX,FX):BX=
UX:PROCcon(EX,FX-2,EX,FX):CX=UX:PROCcon(
EX-2,FX,EX,FX):DX=UX:PROCcon(EX+1,FX-1,E
X,FX):CBX=UX:PROCcon(EX+1,FX+1,EX,FX):AB
X=UX:PROCcon(EX-1,FX+1,EX,FX):ADX=UX
1560 PROCcon(EX-1,FX-1,EX,FX):CDX=UX:EN
DPROC
1570 DEFPROCmoveaway(pass%):Y%=0:X%=0
1580 REPEAT:Y%=Y%+1:REPEAT:X%=X%+1:UNTI
LX%=80OR(cX(X%,Y%)<128ANDcX(X%,Y%)>0)
1590 IFFX=8X%=0
1600 UNTILY%=10OR(cX(X%,Y%)<128ANDcX(X%
,Y%)>0):IF Y%=10 P%=X%:Q%=Y%:ENDPROC
1610 P%=X%+1:Q%=Y%:IFpass%PROCcchk ELSE
PROCvl
1620 IF m%=0 ENDPROC
1630 P%=X%-1:Q%=Y%:IFpass%PROCcchk ELSE
PROCvl
1640 IF m%=0 ENDPROC
1650 P%=X%:Q%=Y%-1:IFpass%PROCcchk ELSE
PROCvl
1660 IF m%=0 ENDPROC
1670 P%=X%:Q%=Y%+1:IFpass%PROCcchk ELSE
PROCvl
1680 IF m%=0 ENDPROC
1690 IF Y%<10 Y%=Y%-1:GOTO1580
1700 ENDPROC

```

```

1710 DEFPROCsetchars:RESTORE1740:FORD%=
1708:READEX,FX,CX:cX(EX,FX)=CX:cX(8-EX,1
0-FX)=CX+128:NEXT:FORY%=1709:FORX%=1707
1720 IFcX(X%,Y%)<>0PROCprintchar(X%,Y%,
cX(X%,Y%))
1730 NEXT,:ENDPROC
1740 DATA1,1,7,7,1,6,2,2,3,6,2,2,1,3,1,
3,3,5,5,3,4,7,3,8
1750 DEFPROCboard:GCOLOR,1:FORX%=0T07:MO
VE(X%*128),156:DRAW(X%*128),1024:NEXT:FO
RY%=0T09:MOVE0,(Y%*96)+156:DRAW896,(Y%*9
6)+156:NEXT:GCOLOR,2:MOVE132,728:MOVE380,
728:PLOT85,132,448:PLOT85,380,448:MOVE51
6,728:MOVE764,728:PLOT85,516,448
1760 PLOT85,764,448:GCOLOR,7:RESTORE1770
:FORAX=1T010:READX%,Y%,R%:PROCcircle(X%,
Y%,R%):NEXT:ENDPROC
1770 DATA448,204,44,448,204,32,448,976,
44,448,976,32,320,204,30,320,976,30,576,
204,30,576,976,30,448,300,30,448,880,30
1780 DEFPROCcircle(X%,Y%,R%):VDU29,X%,Y
%,0,0,0:MOVE0,R%:PX=0:PY=R%:FORA=0T02
STEP0.5:X%=SIN(A)*R%:Y%=COS(A)*R%:MOVEPX
%,PY%:DRAWX%,Y%:MOVE-PX%,PY%:DRAW-X%,Y%:
MOVEPX%,-PY%:DRAWX%,-Y%:MOVE-PX%,-PY%:DR
AW-X%,-Y%:PX=X%:PY=Y%:NEXT
1790 VDU29,0,0,0,0,0:ENDPROC
1800 *T.
1810 FORAX=PAGE TOTOP+3STEP4:!(AX-8000)
=AX:NEXT:PAGE=8000:$&100="0."+CHR$13+R
UN*CHR$13:FORCX=8100T0&106:OSCLI("FX13
8,0,+STR$(?CX)):NEXT

```

VERSATILE CAD/CAM For the BBC Micro

A sophisticated, menu driven, user friendly CAD/CAM package with many facilities for very accurate drawing construction and data extraction for Numeric Control (NC) post processing. As used in Education and Industry.

CAD System (EDUCAD) - £80 (ex. VAT)

- Geometric/schematic drawings
- Zoom, scale and units control
- Text/symbols, any size and angle
- Mirror and duplicate
- Generalised x-y plotter output
- Area properties

- Construction/modification
- Text/symbol font editor
- Intersects and tangents
- Rubber banding
- Graphics screen dump
- Revision /material info. editor

CAM System (EDUCNC) - £35 (ex. VAT)

- Part geometry from EDUCAD
- Tool path animation

- Part profile definition
- Generalised NC post processor

Econet Network versions available

Both packages have explicit input prompts and error messages. This together with over 80 pages of online HELP data makes these systems easy to use and easy to learn - an ideal way of introducing this new technology.

• Amstrad PC CAD/CAM systems also available -

TO ORDER simply specify disk format requirements or to obtain further details contact:

EDUSOFT,

Lodge Hill, Sevens Road, Cannock Wood, Rugeley, Staffs WS15 4RX
☎ 05436 76939

MICROLEDGER

A high quality general ledger package designed by a Chartered Accountant for maximum versatility and ease of use. Ideal for small businesses, clubs, schools etc., as well as for home accounts. Runs on all BBC micros with 32k RAM or more. Features include:

- ★ "Double-entry" accounting.
- ★ Up to 99 general ledger accounts: all account names user-specified - can include VAT and sales/purchase ledger accounts.
- ★ Up to 500 transactions per accounting period.
- ★ Excellent budgeting facility.
- ★ Reports include Income & Expenditure Account, Balance Sheet, Funds Flow Statement. Current period and year-to-date reporting with actual/budget comparisons. Full audit trail.
- ★ Consolidation of two or more separate ledgers.
- ★ Menu-driven with full prompt messages.
- ★ Comprehensive, 30 page manual.

MicroLedger is supplied on 40 track 5.25" disk or on tape cassette for conversion to other disk media. Unrivalled value at **£16.50 (incl. p&p)** for disk or tape - specify which is required. Send cheque with order to **Ixchel Software, 16 Meredith Road, London SW13 0DY;** or phone **01-876 9732** for a free fact sheet.

Reach For The Sky

with GLIDER PILOT 2, our comprehensive flight simulator. Features cable launch, thermals, cross country with map and practice option. Extensively machine coded for quick response. Instruction booklet.

With full instrumentation and "solid" colour perspective graphics, this is not a game but an accurate and challenging simulation. Keys or potentiometer joystick. Find the thermals and soar!!

FREE to disc users - "NOTEBOOK" - an easy to use memopad utility. Use it as a flight log for Glider Pilot 2!
B, B+ and MASTER.

Cassette £7.95, 5.25" Disc £8.95, 3.5" Disc £9.95.

APEX Software, Station Road, Penshaw, Tyne & Wear
DH4 7PE. Tel: Durham 091-385 3091.


Sciways for Scientists

- Over 350 defined characters accessible with simple 2-key codes
- All characters printable on both screen and printer
- User defined characters can be stored on disc
- All facilities can be used with word processors or with BASIC
- Tested with BASIC I & II, Wordwise, Wordwise Plus, View 2.1, View 3.0, on the Master 128, B+ & Model B, and with Epson/compatible printers

GREEK ALPHABET: Upper and Lower case, upright and Italic

Α Β Γ Δ Ε Ζ Η Θ Ι Κ Λ Μ Ν Ξ Ο Π Ρ Σ Τ Υ Φ Χ Ψ Ω

SCIENTIFIC CHARACTERS: Mainly mathematical but also chemical symbols



Orders accepted from schools, colleges, establishments, etc.
Private orders - cheque with order, please

PRICE £39.95 inc VAT, p&p
16k ROM, 40/80 disc & manual
(not compatible with Inter-Word)

Mayhew Telonics,
376a Ringwood Road,
Poole, Dorset BH12 3LT
Tel: (0202) 747695

£10 Prize letter

EIGHTEEN months after receiving my Acorn Teletext Adapter and sorting out many difficulties, I can now download telesoftware satisfactorily. And I think my findings may be of interest to others:

- A wide band aerial is not good enough. Use one made for the channels in your area. Find the correct height for your location – the highest may not be the best.
- The signal must be good and pure. An aerial amplifier may help, but be sure that any spare outlets are properly terminated. Dummy loads can be bought from a dealer. Look at some pages of a program on telesoftware. Missing lines or a faulty header can produce bad data.
- The adapter may take up to one hour to settle down. Do not tune it or download until it is ready.
- Tuning is not easy. All four stations are difficult to find. Turn the controls very, very slowly. A 100 per cent signal on the tuning display does not mean perfect downloading.
- The adapter must plug direct into the 1MHz port. Daisy chaining from another unit such as the Acorn Music 500 can cause distortion problems.
- Other roms – even official ones – may interfere with the teletext rom.
- Load a rom image into any sideways ram, otherwise it may fill with rubbish which could produce bad data.
- If there is a lot of bad data during downloading it could corrupt the disc. Always download to a spare disc.
- Constant bad data may be caused by faulty transmis-

sion. The BBC is very responsive and helpful. See page 195 of Ceefax on BBC 1. Contact them first for information about reception in your area – and last if all else fails.

- The beep with the bad data can be silenced with *FX212,1 and *FX213,30 will reduce the pitch. *FX214,1 will reduce the duration. Type them in before *TEL.
- Switch off the adapter when not in use. It can interfere with other programs, especially when loading and saving.
- Be patient and do not despair. The majority of programs are well worth the effort.

If anyone doubts the value and quality of The Micro User programs they should sample those provided on telesoftware. And they are all free! – **David Richmond, Scarborough, North Yorkshire.**

Printer margins

IN the June 1987 issue of The Micro User, A.B. Leonard asked how to use small sheets of paper in his Taxan printer.

Most Epson compatible printers provide for left and right hand page margins. These can be used without a word processor to print pages as narrow as you wish.

When you input text you have to take care of things like split words at line endings and the paper-out facility

will warn when the paper runs out.

The relevant codes for the Left Hand Margin are VDU 1,27,1,108,1,n (n can be any number from 0 to 78,0 to 93, or 0 to 133 depending on the font in use – Pica, Elite or Compressed). The Right Hand Margin codes are VDU 1,27,1,81,1,n (n can be from 2 to 80,3 to 96, or 4 to 137 depending on the font being used).

For an extreme example, VDU 2,1,27,1,108,1,4,27,1,81,1,6 would provide a left hand margin of five spaces and in Pica print with text two characters wide down a one inch wide strip of paper. – **John Henson, Dundonald, Kilmarnock.**

Envelope error

MAY I point out an error in my Envelope Find routine published in the Library of the February 1988 issue of The Micro User. Line 40 should read:

```
40 NX=NX-1:@X=0:BX=&8C0
```

– **Dave Clark, Cannock, Staffs.**

Gazeter enhanced

IT was nice to see my Gazeter program in print, but I'm sorry to say that one bug needs to be fixed. A friend found that *GAZE invents a variable P

Escaping from Break

RECENTLY I have been using the command *FX200,3 in my program to disable Escape and produce a Bad program message when Break is pressed and OLD is typed. What exactly does this command do, and is there any way of combatting it after a Break?

I want to know because I don't really want to take this

out of my program but find it a bit of a nuisance having to reload it again. – **Paul Howieson, Portsmouth, Hants.**

● *FX200 alters the effects of Escape and Break. To work out the number following it you add two values.

The first concerns Escape: Make it zero so that Escape works normally and one to disable it.

The second value involves Break: For normal action it's zero, while a value of two makes sure that memory is cleared on Break.

By using *FX200,3 you're choosing to disable Escape and clear memory on Break (3=1+2). It's because you've cleared memory you get Bad program. To simply disable Escape use *FX200,1.

Win a tenner

● Want to write to The Micro User? The address is: Letters, The Micro User, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.

Writers of the most interesting letters receive a £10 prize.

when the system variable TOP is used in the gazetted program.

This is because TOP is tokenised as a TO token – &B8 – and followed by the character P. The following patch will catch this oddity:

```
2722 CMP #&B8
2723 BNE not_to_tkn
2724 INY:LDA (strt),Y
2725 CMP #ASC"P"
2726 BEQ inv
2727 DEY:BEQ inv
2728 .not_to_tkn
```

I strive for perfection, but as the great Dykstra said: "If debugging is the process of removing bugs, then programming must be the process of putting them in". – **Ray Wilson, St. Albans, Herts.**

Screen dumping

I HAVE recently bought an Amstrad DMP 2000 printer to accompany my BBC B. It works perfectly, but I need a screen dump program for my GCSE course in computer studies.

Is a suitable program that I can use? – **P.B. Wren, Chatham, Kent.**

● Two main dump roms are available – Dumpout 3 from Watford Electronics and

Turn to Page 152 ►

◀ From Page 151

Technomatic's Dumpmaster. Both will dump to any Epson compatible and various other printers.

Shadows of Mini Office II

I AM having problems with the compatibility of disc-based Mini Office II and Watford Electronics' 32k shadow ram board. When the shadow ram is activated Mini Office II refuses to run. Can you or your readers help me? — **A.J. Downer, ACT, Australia.**

● Unfortunately these two items are not compatible. However rom-based Instant Mini Office II will utilise all the popular shadow ram boards for the extra memory they provide.

Correct use of CALL

WE would like to comment on your review of our Unitext computer assisted language learning — CALL — software in the February issue of The Micro User.

The reviewer's observations were generally accurate and fair, but left a negative impression of all CALL software.

We suspect this is because he really wants the micro to behave like the infinitely patient, intelligent but obedient human being — able to replace the teacher for most classroom activities.

This is not the case, nor is it likely to be so in the near future. Natural language is complex, subtle and imperfectly understood, and attempts to write CALL software to take account of all possible ways of translating even a short passage results in programs which are complex and effectively dedicated to a single text.

This has been done successfully — notably by Brian Farrington of the University of Aberdeen — but it is not something which can be done easily for any text by any teacher.

However, it is still possible to use CALL in its present

Multi column lister re-visited

£10 Prize letter

UNTIL now I have been a passive reader of your excellent magazine. However I can now contribute some fixes for Steve James' very useful multi-column lister in the November 1987 issue of The Micro User.

As printed — and after L.J. Harper's fixes in the February 1988 issue — there are still a few annoying little bugs, which the following changes will fix. The first allows the title option to be used:

```
180 prnt%=TRUE:title$=""
```

The columns option incorrectly recalculates column

width, resulting in the printing of alternate blank lines, thereby doubling the use of paper. This is cured by altering the —6 in line 390 to —7 to give:

```
390 DEFPROCcolwidth:
IF basic% colwidth%=
(width%/columns%)-7
ELSE colwidth%=(width%
h%/columns%)-2
```

The final alteration is to line 1590, avoiding errors found while listing various programs. Throughout the line change RIGHT\$ to RIGHT\$(and STR\$(to STR\$.

Many thanks for Get it Right! — it certainly reduces the time for entering each listing, not to mention the stress. — **Ian Lowry, Kings Heath, Birmingham.**

state of development to good purpose in the classroom if you are able to recognise its potentialities and limitations.

The text reconstruction and substitution type of exercises are useful in promoting accuracy and memory skills, and they are acceptable and valuable to students if it is made clear that they are not translation exercises.

Incidentally, our students find that the scoring used in our test programs helps their motivation, even though it is not used by the teacher for assessment purposes.

It is important to remember that CALL is just one technological aid to language learning.

We have integrated its use into our language courses at Coventry Polytechnic and this frees the teacher for tasks which only he or she can do, such as intensive oral work with small groups.

We also ensure that texts and exercises used on the micro link closely with materials used in the language laboratories and with lectures and oral work, so that they are not encountered in isolation.

When CALL is used in this way, teachers need to produce a wide variety of exercises quickly and easily, and for this purpose authoring programs with a simple but

flexible input are essential.

With the present state of development of computer hardware and software the exercises are limited in scope, but they can be very valuable if used correctly.

The best teaching aids are those which allow teachers to use a simple idea in imaginative ways, so they will then fully control the situation.

So you should not work towards completely replacing the teacher by a machine, for all kinds of reasons. — **Ann and Roy Benwell, Coventry Polytechnic.**

Master points

HERE are some observations about software compatibility that may be of interest to owners of a BBC Master:

● There seems to be confusion concerning Master compatibility. I was resigned to losing, among other programs, Aviator and Acheton but I've found that Shift+Z+Break boots these perfectly.

● The rom situation is less happy though there are some surprises: Caretaker works tolerably as does Watford's NLQ Designer and Beebug's Help I.

● Acornsoft's OverView will run in sideways ram. Together with Macromate, Inform and a

Winchester you have a self-contained system with the internal ram used fully, but the external cartridge slots free for permanently sited roms.

● View 2.1 works in sideways ram. This can be of value in the extending of *EXEC files to View's text mode. View 2.1 recognises *FX125 — as does Viewsheet — to switch from command to text modes, while View 3.0 does not. — **Fraser Hadden, Hadleigh, Suffolk.**

Teletext trials

I BOUGHT a teletext adapter through your magazine primarily to download computer software and it appears to function very well. However, to my disappointment I often find, when I run the programs, lots of error reports.

Take the program Diary: As I run it the menu is displayed, but when I select an item I get a syntax error. Can you please help? — **J.Stevenson, Sherborne, Dorset.**

● We have had similar problems from time to time — our solution was to turn off the adapter when running programs.

Archimedes twists

The letter in the February issue of The Micro User from Mr Maxwell gave some twists on the word Archimedes. It may interest you to know that Arthur has the meaning: Acorn Risc by THURsday — **Paul Hancock, Wakefield, West Yorkshire.**

Checksum solutions

WHAT has Steve Turnbull done? There I was, retired, happily using my BBC Micro as a machine for spreadsheets and writing letters, plus occasional games...

I then type in Pinball from the February issue, start line checking then decide to try the Short Checksum routine from the same issue. Next I type *xs and away it goes until line 770. The remainder of

Pinball had to be read sum by sum as the check digit was, of course, wrong from that line.

My Pinball runs without apparent error and line 770 as printed looks logical enough so, please, what is the fault at 770 that consistently gives me D602 instead of FCC?

However, that's not the real problem. Thinking that a simple print error might be causing the checksum's difference I isolated line 770 and set up all the variations I could think of, without success.

"How does this CRC system work, anyway?" I asked myself. So, back through three and a half years Micro User: Relearn hex numerals, realise I don't understand machine code, sort out all the technical articles from past journals and set up a filing system as a prelude to trying to understand instead of just read.

Next, several hours in the public library where I find a few mentions of CRC but no worked example and only one explanation: A few lines of text, no doubt precise, but not exactly forthcoming as to the mathematics.

So please, would someone show how checksums are calculated?

Congratulations on your excellent magazine which, as you can see, is seriously affecting my peace of mind. — **A.E. Meadowcroft, Horton, Northants.**

● Sorry about line 770 — our checksum was wrong, amply demonstrating checksums' raison d'être.

The trouble with storing, copying or transmitting computer data is that it's so easy for it to go wrong and the information to be corrupted.

Because of noise in a telephone line or some other glitch, a 0 can become a 1 or vice versa. In the case of entering a listing, you might provide the hiccup by making a typing mistake.

Errors are a fact of computer life and dealing with them comes down to two problems:

- How do you detect an error in the first place?
- When you find one, how do you correct it?

There are various methods of finding errors in data.

ALL programs printed in this magazine are exact reproduction of listings taken from running programs which have been thoroughly tested.

However, on the rare occasions when mistakes occur corrections are published as a matter of urgency. Should you encounter error messages when you type in a pro-

gram, they will almost certainly be the result of your own typing mistakes.

Unfortunately we can no longer answer personal programming queries concerning these mistakes. Of course letters about suggested errors will be investigated without delay, but any replies found necessary will only appear in the mail pages.

Using parity bits is the most frequently mentioned — basically making sure that the bits in the data consistently add up to an even or odd sum. A more modern and reliable technique involves things known as polynomials and lots of maths. Happily this is dealt with by the micro.

Whatever method is used, however, it inevitably means that check bits are associated with the original data. These are known as the checksum and are extremely allergic to any changes in the data.

When the data is received or used, the computer can apply the same methods to the received data and see if the result corresponds to the checksum that came with it. If it does fine and good. If it doesn't then there's probably an error in the data (or possibly in the attached checksum, which may itself have been corrupted).

In the case of listings checksums, the data received is the program line you typed in, and you're the computer making sure the checksums match.

Notice that the checksum is associated with the data, but not part of it. In effect, it's extra to the message, or redundant. And the more you want to increase the chances of finding an error, the more redundant bits have to be added to the message. They're not part of the data, but data about the data!

Once an error is found, there are several strategies for dealing with it. When entering listings you just have to check for mistyping.

Computers, however, can be more sophisticated when talking to each other. They could retransmit the whole thing until they get it right, but this is rather drastic as only a bit of data may be

wrong.

Basically, what a cyclic redundancy check does is cycle each significant bit of the data through the checksum eight times altering it — but zeros are not cycled: They are redundant. This is highly sensitive to the slightest change in data.

The BBC Micro's cassette system uses CRC, and page 399 of the original User Guide gives an algorithm showing how it works.

£10 Prize letter Memory functions

IN reply to J.M. Fielder's letter in your December 1987 issue, screen memory in the B+ and Master 128 can be loaded or saved using addresses in the range &FFFE0000 to &FFFE8000.

Listing I provides two Tube compatible procedures to load and save screens in any mode.

Direct byte access can be easily achieved in either of two ways on the B+, the Master 128 and the Tube at the same time.

The osword calls five and six with the address between &FFFE0000 and &FFFE8000 can be used to access screen memory over the Tube on the B+, but according to the New Advanced User Guide on a Master 128 they address the 64k of sideways ram instead.

This is the technique used by the function and procedure in Listing II.

Acorn has provided two new operating system routines — oswsrc at &FFB3 and osrdsc, formerly osrdm, at &FFB9.

Oswsrc pokes the byte in the accumulator into screen

memory at the address pointed to by &D6,&D7 and the Y register, whereas osrdsc uses the vector &F6, &F7 and returns the value in the accumulator.

This technique has been implemented on both the B+ and the Master, but is not compatible with a second processor. This is used in Listing III.

```
DEF PROCscreenload(f$)
PROCos("LOAD "+f$+" FFFE"+
STR"FNscreenbase)
ENDPROC
DEF PROCscreensave(f$)
PROCos("SAVE "+f$+" FFFE"+
STR"FNscreenbase+" FFFE800
0")
ENDPROC
DEF PROCos($&700)
LOCAL X%,Y%:Y%=7
CALL&FFF7:ENDPROC
DEF FNscreenbase
LOCAL A%,X%,Y%:A%=135
Y%=(USR(&FFF4)&AND&FF0000)D
IV&10000
IF Y%<3 THEN =&8000
IF Y%=3 THEN =&4000
IF Y%<6 THEN =&5800
IF Y%=6 THEN =&6000
=&7C00
```

Listing I

```
DEF FNread(address%)
?&F6=address%
?&F7=address%DIV256
=USR(&FFB9)&AND&FF
DEF PROCwrite(addr%,byte%)
LOCAL Y%,A%:?&D6=addr%
?&D7=addr%DIV256
A%=byte%:CALL&FFB3
ENDPROC
```

Listing II

```
DEF FNread(off$%)
LOCAL A%,X%,Y%:A%=5
XX=&700:Y%=XXDIV256
!XX=&FFFE0000+off$%
CALL&FFF1:=XX?4
DEF PROCwrite(off$%,byte%)
LOCAL A%,X%,Y%:A%=6
XX=&700:Y%=XXDIV256
!XX=&FFFE0000+off$%
XX?4=byte%:CALL&FFF1
ENDPROC
```

Listing III

— **P.J. Dellar (age 15), Harpenden, Hertfordshire.**

Sprite surprise

WHY, when Roland Waddilove wrote Bouncing Sprites in your May 1987 issue, did he use the label loop twice?

The program worked fine, as do all his programs, but I thought you were only allowed to define a label once for a

Turn to Page 154 ►

◀ From Page 153

program and not to use it again.

I admire the way the programs were written and I understood everything he was trying to convey. If he ever writes a book on the subject please make sure we know about it.

I have been a subscriber to The Micro User since day one, and like the way that it has changed style over the years.

— **K. Lawler, Dewsbury, W. Yorks.**

● **Roland Waddilove replies:** Thanks for the praise, I'm glad you liked the series.

To answer your question: Although re-using labels is not good programming practice in general, thinking up names for loops can get very tiresome. And as long as it's a backwards reference — the jump to the label occurs after the label is defined — it is actually safe to re-use the label name.

Diagrammatical errors?

HAVING just read the review of our Diagram II package for the Archimedes, I felt obliged to point out a few facts that your reviewer appears to have missed.

I thought the review of the features of Diagram II was fair, although one error was when it was stated that only the standard font was loadable on to the screen. It is in fact possible to load any defined font to the screen.

Also the statement that you are limited to 1024, 8 by 8 blocks is not a problem unless you try to produce art type drawings which — we specifically state in the handbook — is not what the program is designed for.

What concerned me more was the fact that the review criticised the program mainly because of the fact that it was a "hurried" transfer to the new machine and "only ran on the emulator".

We have in fact produced this version of Diagram II at the request of our customers, while developing much more comprehensive CAD software to run on the native machine.

We had many phone calls from companies before Christmas saying that they

I DISAGREE with the views put forward in the article "Heaven help the pupils" in the February issue.

Being a teacher, I usually look at the education section first when I buy The Micro User. I am horrified that a person, who I assume is a school governor, should publish through your magazine such an insensitive and irresponsible set of one-sided one-liners. Heaven help the rest of his school community — teachers, pupils and fellow governors.

I am even more surprised that you have billed his article as "a look at the future role of the BBC Micro in primary education". Perhaps an article by one of Her Majesty's Inspectors or some other spokesman from the Department of Education and Science, or a leading educationalist might be appropriately billed as that.

I expected some words of wisdom on future hardware or software developments. I hoped for reports of curriculum innovation and development that I know are taking place around the country. It was nothing of the sort.

I am a support teacher — not an expert — employed by a local education authority to help other teachers find appropriate places within the curriculum, for the use of micros. My work centres

were considering purchasing Archimedes machines to replace their existing BBC Micros but would only do so if we could get Diagram II running on the Archimedes.

It seemed obvious to us that because of the estimated 9 to 12 months to produce software worthy of the Archimedes, it would help Archimedes sales by providing Diagram II as a temporary version on the Emulator.

As to the cost of the program, which the review states is expensive, all existing owners of Diagram II get the Archimedes version completely free, and we are one of the few companies who offer our customers a full money back guarantee with our soft-

ware. If they do not think our software is worth the price we charge, they can have a full refund. We have not had requests for this so far.

Since there is so little software available at the present time for the Archimedes I find it difficult to understand why your magazine should criticise us for providing our current software quickly via the emulator, while producing new software to complement the full features of the machine.

We were not one of the lucky companies to get an early version of the Archimedes, and I think it would be true to say that if all companies like us spent the next nine months writing high qual-

ity software for the machine, then at the end of that time we would not have any Archimedes owners to sell it to. — **Jim Daniels, Pineapple Software, Ilford, Essex.**

What I see leads me to think that the role of micros in

around how supporting teachers manage their classroom.

In the absence of any more qualified response to Bob Redrup, please allow me the opportunity to reply to some of the points that he makes. They are either sweeping in their judgement, or just totally out of order. I feel I must reply.

The article is full of throw-away one-liners and little real evidence to support them, other than a single experience and a few reported conversations.

In my job I see a much more positive aspect of the developing use of computers, in more than one school. I see the creative use of IT and CAD in classrooms.

I see children learning to use file handling as a research tool. I see them using word processing as a means to refining language. I also see stimulating micro-based simulations enriching many areas of the curriculum. I even see children creatively using simple programming skills, with languages like Logo.

The teachers are not computer freaks. They are hesitant at the keyboard, but they know when to apply this powerful "beast" so that their children are not.

classrooms is in good hands. Bob Redrup should take a longer and closer look.

I agree that all is not perfect. We do need to improve, adapt and also need time, money and above all support. The LEA I work for is doing its best, as I am sure are other LEAs, but we need government support, parents' support, colleagues' support and — dare I suggest it — the understanding and support of school governors.

If there is a nightmare in education, it is not that children will grow up technologically illiterate, they will see to that. It seems that if Mr Redrup has his way though, they may grow up thinking that being able to program a computer is a more important skill than being sensitive to people's feelings, values and thoughts.

On the other hand, if we get that aspect of our children's education right, we need not fret about them despising us for being less skilful in things that are less important. If we get it wrong, Heaven help us all. — **Mick Nadal, West Bridgford, Nottingham.**

● Bob Redrup's article has raised quite a few hackles among the teaching profession, the above being just a short extract of Mr. Nadal's letter, which seems to summarise the opposing view.

ity software for the machine, then at the end of that time we would not have any Archimedes owners to sell it to. — **Jim Daniels, Pineapple Software, Ilford, Essex.**

GCC plea

WE have been given a BBC Ram-Rom 15, manufactured by GCC (Cambridge), who have now gone out of business.

We have no instructions for it and I wonder if anyone out there has a handbook they could lend us? — **Chris Ward, Head of Physics, Lodge Park School, Shetland Way, Corby, NN17 2JH.**

● Can any reader help?

Quest



Walter Cobra and the Quest for the Golden Dragon

You are Walter Cobra, a clever but absent-minded young lad who spends many hours indulging in two favourite hobbies: exploring, and inventing. One day, to your surprise, you stumble across a faded old map which indicates the route to a buried object marked as "The Golden Dragon". You recognise the starting-point on the map as being a wishing-well located a couple of miles away from your home. Full of anticipation, you decide to begin your quest the following day.

The next day, as the sun is rising you excitedly get out of bed, pack your

rucksack with a few provisions, and then don your jet-boots — an astounding invention which enables you to fly for short periods of time. You amble over towards the wishing-well and slowly climb down the walls of the well. It's quite deep, but finally you reach the bottom. You then suddenly realise that you have left behind a very important item, the map.

You decide to press on regardless. You remember some of the places shown on the map: "The Music Room", "The Joke Shop", "The Chapel"; but, bearing in mind the size of the map, this quest will surely be the greatest challenge of your life!

Nearly 100 Screens full of Tantalising Puzzles and Curious Adversaries

BBC Dual Cassette.....\$9.95 Acorn Electron Dual Cassette.....\$9.95
 BBC Micro 5¼" Disc.....\$11.95 BBC Master Compact 3½" Disc.....\$14.95

(Compatible with the BBC B, B+ and Master Series computers)

PRIZE COMPETITION

£100 is the first prize in our competition, with 20 congratulatory certificates for runners-up.

To enter the competition, you must locate the Golden Dragon, and write to us describing the final messages that you receive.

Closing Date: 30th June, 1988.

SUPERIOR SOFTWARE
 Limited

ACORNSOFT

Dept. Q 2, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453

Please make all cheques payable to "Superior Software Ltd".



24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

(This does not affect your statutory rights)

All this in just

```
Time 0.17 54 Words 5544 Free
Insert Characters
START
July 23, 1986
Dear Douglas,

Further to our telephone conversation
yesterday, I have pleasure in enclosing
a pie chart showing the breakdown of our
fixed costs for the year.

As previously discussed with yourself, I
will be travelling down by train next
Thursday morning.

I look forward to meeting you then.

Yours sincerely,

Jeremy Brood
```

WORD PROCESSOR

Compose a letter, set the print-out options using embedded commands or menus, use the mail merge facility to produce personalised circulars – and more!

```
Used 11 Free 32 Len 127 Rec 1
Surname Woollier
First name Douglas
Address1 Hallwood House
Address2 Hallwood Road
Town Stockport
Post code SK5 4GP
Credit Lim 10000
Discount 30

Use +, -, *, /, v, ESCAPE, (N)ew, (E)dit,
(B)delete, (M)arker, (P)rint
```

DATABASE

Build up a versatile card index, use the flexible print out routine, do powerful multi-field sorting, perform all arithmetic functions, link with the word processor – and more!


```
Mini Office II Label Printer

#####
# Douglas Woollier #
# Hallwood House #
# Hallwood Road #
# Stockport #
# SK5 4GP #
#####

Use Cursor Keys To Move
# Followed By A Number For Field
ESCAPE To Exit TAB To List Fields
```

LABEL PRINTER

Design the layout of a label with the easy-to-use editor, select label size and sheet format, read in database files, print out in any quantity – and more!

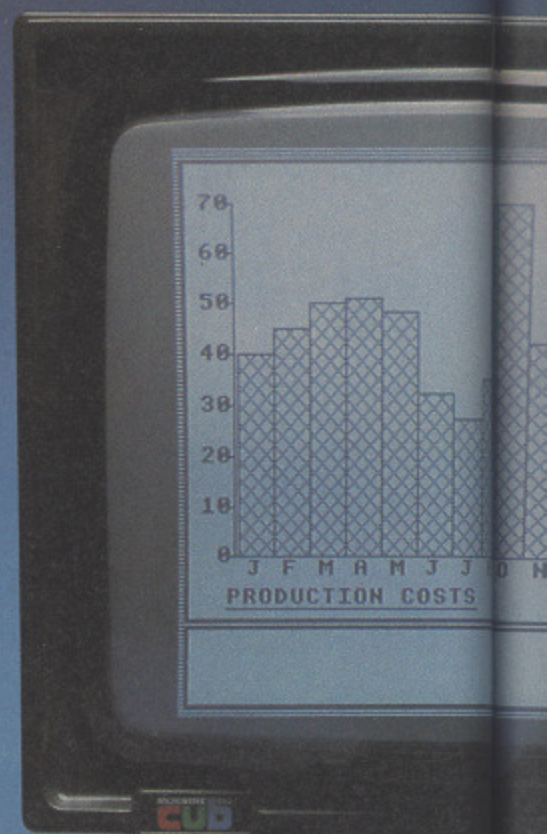

...and at a price t

Mini Office II is a comprehensive integrated suite of programs setting a new standard in home and business software.

These sample screenshots illustrate just a few of the wide range of features, many of which are usually only available on software costing hundreds of pounds. Most are easily accessed by using cursor keys to move up and down a list of options and pressing Return to select.

Mini Office II takes over where the original, highly successful Mini Office left off, with numerous extra features, two additional modules, a program to convert existing Mini Office files to Mini Office II format, and a 60 page, easy to follow manual.


And it's at a price everyone can afford!

DATABASE SOFTWARE


Europa House, Adlington Park,
Adlington, Macclesfield SK10 4NP.

Now available on a power-packed rom board!

- Four 32k roms on one board packed with 128k of super fast machine code.
- Easy to install – no soldering needed.
- Split second application selection.
- Frees valuable ram space for much more data.
- Fully compatible with the whole BBC|Micro range, Aries or Watford shadow ram board, and tape, DFS, ADFS and ECONET filing systems.

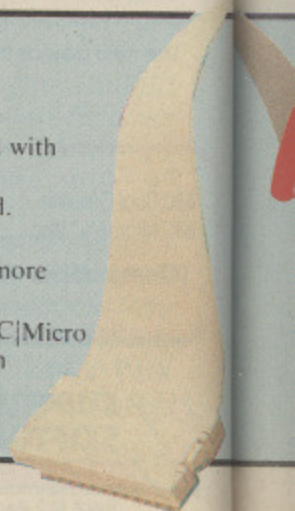

ONE package!

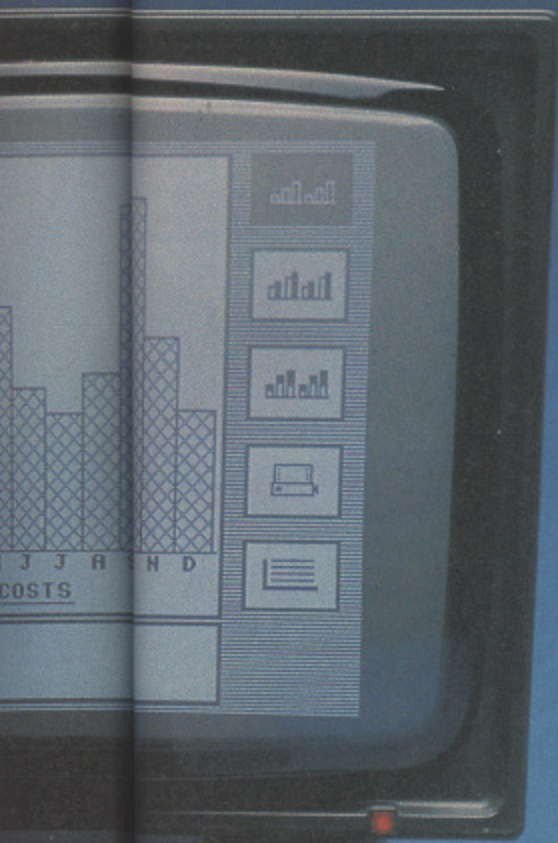

SPREADSHEET
Prepare budgets or tables, total columns or rows with ease, copy formulae absolutely or relatively, view in either 40 or 80 column modes, recalculate automatically – and more!


```

Freespace= 3750      Auto      Text
Cell=A1
Contents=          Fixed
    
```

	A	B	C	D
Fixed Costs for 1986				
1)		Jan	Feb	Mar
2) Rent	400	400	400	
3) Electric	60	50	45	
4) Telephone	130	125	115	
5) Salaries	2450	2400	2400	
6) Cleaning	80	80	80	
7) Stationary	55	50	50	
8) Postage	375	360	355	
9) Carrier	420	380	330	
10)				
11)				
12)				
13)	TOTALS	3970	3845	3775
14)		*****	*****	*****
15)				
16)				
17)				
18)				

MASTER DISC NOW AVAILABLE!

GRAPHICS
Enter data directly or load data from the spreadsheet, produce pie charts, display bar charts side by side or stacked, overlay line graphs – and more!

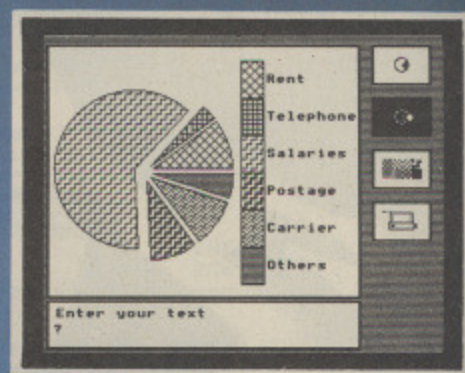

COMMS MODULE
Using a modem you can access services such as MicroLink and book rail or theatre tickets, send electronic mail, telex and telemessages in a flash – and more!


```

>br
*****
British Rail Service
Tickets / Fares / Timetable
*****
(c) Database Publications

1 * Ticket Bookings
2 * Pullman/Steam Bookings
3 * Seat Reservations
4 * Sleeper Reservations
5 * Pullman Rail
6 * Steam Excursions
7 * Electric Express - Newsletter
8 * Timetable and Fares from May 12th

* Hh for HELP
!-B Rdisplay QUIT
Select 1
    
```


ce that can't be matched!

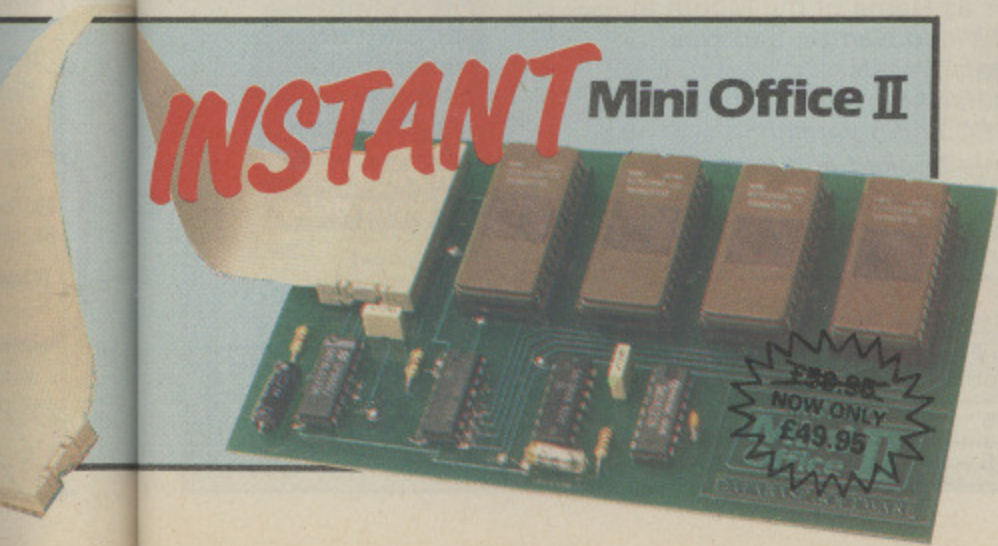

Mini Office II	
BBC B, B+	
Cassette.....	£14.95
5 1/4" disc.....	£16.95
MASTER	
5 1/4" disc.....	£19.95
COMPACT	
3 1/2" disc.....	£21.95
INSTANT MINI OFFICE II	
On rom for full BBC range	£49.95

Turn to order form on Page 159

FREE
when you subscribe
to The Micro User

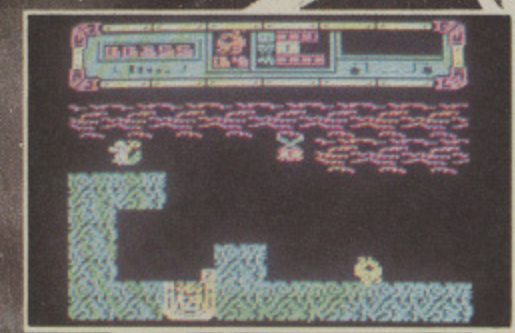

In this delightful game you control BLOB, the Biologically-Operated Being, navigating him through 500 action-packed screens to rebuild the unstable planet's core.
Bubble Bus' Starquake is one of the biggest-selling games for home micros, due to its incredibly-addictive gameplay and cleverly-animated graphics. It has received

such accolades as Game of the Month in *Computer and Video Games*, and was awarded a *Crash Smash*.
● *What Hac-Man said about the BBC Micro version:*
'I am now firmly hooked and every spare scrap of paper is being turned into a map of the game. Buy it - it's great.'

Don't miss out on this tremendous offer - fill in the coupon on Page 159 without delay.

Suitable for	Product	Format	RRP	Special reader offer	YOU SAVE	Offer including subscription
BBC Micro	Starquake	Tape	£9.95	£4.95	£5	FREE
		5¼" Disc	£11.95	£5.95	£6	

N.B. Current subscribers can re-subscribe early to take advantage of this very special opportunity.

FREE
Subscribe
User

★ Special price if accompanied by subscription or renewal

Valid to May 31, 1988
Overseas orders sent Airmail
Orders subject to availability
Please tick items in box below

Annual magazine subscription £ p

	New	Renewal
UK £15 2001	2002	
Europe (incl Eire) : Surface £25 2365	2114	
Overseas Surface £31 2366	2367	
Overseas Air £42 2004	2113	

Commence with _____ issue

FREE with subscription (tick one box only)

Starquake cassette 2149

Starquake 5.25" disc 2154

Annual subscription for cassettes and discs

	New	Renewal
BBC 'B' cassette £35 2005	2009	
5.25" disc 40T £50 2006	2100	
5.25" disc 80T £50 2007	2111	

Commence with _____ (state month)

Add £10 for Europe (inc Eire)/Overseas

Skirmish **NEW**

Cassette	★ £4.95	£7.95	2147/8	
5.25" disc	★ £6.95	£9.95	2150/1	
3.5" disc	★ £9.95	£12.95	2152/3	

Computer Hits 4 **NEW**

Cassette	★ £3.95	£6.95	2096/7	
----------	---------	-------	--------	--

Ransack **NEW**

Cassette	★ £3.95	£6.95	2098/9	
5.25" disc	★ £5.95	£8.95	2100/1	
3.5" disc	★ £7.95	£11.95	2102/3	

Books

BBC Basic	★ £1.25	£5.95	2084/5	
Sound and Graphics	★ £1.25	£5.95	2086/7	
Both	★ £1.90	£11.90	2088/9	

Add £1 for Europe (inc Eire). Add £2 Overseas per book

The Life Of Repton **NEW**

Cassette	★ £2.95	£5.45	2090/1	
5.25" disc	★ £3.95	£5.95	2092/3	
3.5" disc	★ £5.95	£7.95	2094/5	

Acornsoft Specials

Language Roms

BCPL Bundle * Not ADFS	£29.95	2045	
---------------------------	--------	------	--

Add £5 for Europe (inc Eire), £19 Overseas

Forth	£19.95	2046	
-------	--------	------	--

Add £2 for Europe (inc Eire)/Overseas

Logo	£29.95	2047	
------	--------	------	--

Add £4 for Europe (inc Eire), £15 Overseas

Education

ABC, Workshop, Talkback and Spooky Manor (four cassettes)	£9.95	2048	
---	-------	------	--

Music

Creative Sound Book	£4.95	2049	
Two 5.25" discs 40T	£3.95	2056	
Two 5.25" discs 80T	£3.95	2057	

Games

Revs, Revs 4 Track and Aviator (3 cassettes)	£9.95	2050	
--	-------	------	--

Add £4 for Europe (inc Eire), £7 Overseas

Micro User back issues £ p

UK £1.75	January 1988	2510	
Europe inc. Eire £2.25	February 1988	2511	
Overseas £3.75	March 1988	2512	
	April 1988	2513	

Monthly cassettes/discs

	BBC B Tape	40 track 5.25" disc	80 track 5.25" disc	3.5" disc
	£3.95	£4.95	£4.95	£7.75
Barny Bee	Jan	2608/11		
Pinball	Feb	2612/15		
Pipeline	Mar	2616/19		
Darts	Apr	2620/23		
Chinese Chess	May	2624/27		

Ten of the Best Games **NEW**

Cassette	£3.95	2131	
5.25" Disc 40TR	£4.95	2132	
5.25" Disc 80TR	£4.95	2133	

Basic Utilities

5.25" Disc 40TR	£4.95	2134	
5.25" Disc 80TR	£4.95	2135	

Graphic Utilities

5.25" Disc 40TR	£4.95	2136	
5.25" Disc 80TR	£4.95	2137	

Ram and Disc Utilities

5.25" Disc 40TR	£4.95	2138	
5.25" Disc 80TR	£4.95	2139	

All Four Discs

5.25" Disc 40TR	£17.80	2104	
5.25" Disc 80TR	£17.80	2105	

Starquake (see page 158) **NEW**

Cassette	£4.95	2155	
5.25" disc	£5.95	2156	

Morley Teletext Adapter

Teletext Adapter (40 track utilities disc)	£99.95	2074	
Teletext Adapter (80 track utilities disc)	£99.95	2075	
Power Supply	£9.95	2054	

Add £4 for Europe (inc Eire). Add £7 for Overseas

The Sound Master

	£14.99	2083	
--	--------	------	--

Add £2 for Europe (inc Eire). Add £7 for Overseas

Knitwear Designer

BBC 'B' Cassette	£8.95	2031	
5.25" Disc	£9.95	2032	
3.5" Disc	£10.95	2051	

Add £2 for Europe (inc Eire). Add £5 for Overseas

Nursery Rhymes

BBC 'B' cassette	£5.95	2070	
5.25" disc 40T	£6.95	2071	
5.25" disc 80T	£6.95	2072	
3.5" disc	£7.95	2073	

Mini Office II (see page 156 & 157)

BBC B, B+	Cassette £14.95*	2368	
	5.25" disc 40T £16.95*	2369	
	5.25" disc 80T £16.95*	2370	
BBC Master	5.25" disc 80T £19.95*	2028	
BBC Master Compact	3.5" disc £21.95*	2029	

* Add £2 for Europe (inc. Eire). Add £5 for Overseas

Instant Mini Office II 4x32k Rom Board £49.95† 2372

† Add £3 for Europe (inc. Eire). Add £8 for Overseas

Save £10

Fun School

	BBC B Tape	40 track 5.25" disc	80 track 5.25" disc	3.5" disc	5.25" disc Master
	£3.95	£4.95	£4.95	£6.95	£4.95
Age 2-5	2338/41				2076
Age 5-8	2342/45				2077
Age 8-12	2346/49				2078

Disc Storage Box (holds up to 60 5.25" discs) £4.95 2052

Micro User Binders UK £4.95, Europe (inc Eire) £8.25, Overseas £10.25 2221

Dust Covers

BBC B & B+	£3.95	2220	
BBC Master	£3.95	2222	
BBC Master Compact	£3.95	2224	

Readers in Europe (inc Eire) add £2. Overseas add £4 per item unless otherwise indicated

Don't forget to fill in your name and address overleaf.

TOTAL

Payment: please indicate method (✓)

Access/Mastercharge/Eurocard/Barclaycard/Visa

Cheque made payable
to Database Publications Ltd.

Expiry Date

____/____

BLOCK CAPITALS PLEASE

Name _____

Address _____

_____ Post Code _____

Tel: _____

Signed _____

Please allow 28 days for delivery

You can also order by phone, Prestel or MicroLink/Telecom Gold

- Any of the goods listed here can be ordered by telephone.
- Micronet subscribers and other users of Prestel can also use the Prestel mailbox.
- MicroLink subscribers and other users of Telecom Gold can also use the MicroLink mailbox.

Orders: **0625 879920**
24 hours
Enquiries: **0625 879940**
9am-5pm.

Prestel
Key Page 89, then send your order to:
614568383
24 hours

MicroLink/Telecom Gold
72:MAG001
24 hours

Fax Orders
0625 879966
24 hours


Don't forget to quote your credit card number AND your full address.

**The Micro User,
FREEPOST,
Europa House,
Adlington Park,
London Road,
Adlington,
Macclesfield SK10 4NP.**

**NO
POSTAGE
NEEDED
(IF POSTED IN UK)**

TUCK INTO FLAP

Don't forget to provide: Your address, your cheque/credit card No.
If you've ordered discs have you indicated which format?

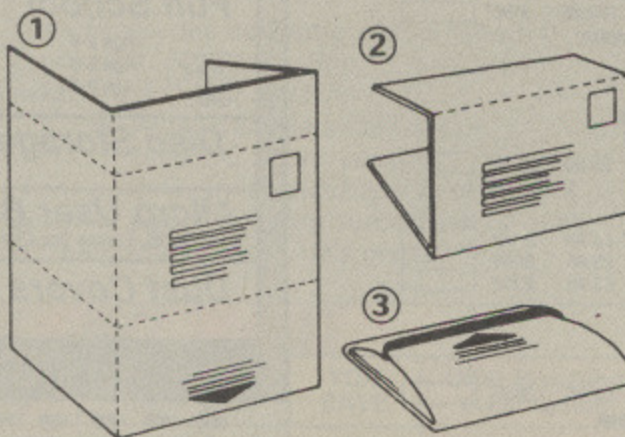

THEORY OF MUSIC

Questions and Exercises—Grades 2 to 5

LEARNING AN INSTRUMENT? This program is for you. Basic Theory of Music is vital to every musician. You have to pass Grade 5 Theory before you can take Grade 6 instrumental. This is a practice program: it throws questions at you as long as your stamina lasts! keys, scales, chords, intervals, time, bars, rests, terms. Full details on request.

For BBC B, Master, Compact

5.25 inch disc £9.00
3.5 inch disc £10.00
School package (runs on ECONET) £12.00

(Please specify computer type, colour/mono, 40/80, DS/SS, DFS/ADFS)

Also available:

PLAY WHAT I PLAY

(Tests your ear for notes, and helps non-piano pupils to learn their way about the keyboard: options for all from beginner to advanced)

CAN YOU READ MUSIC?

(Beginners' quiz on notes and rests)

The above 2 on a disc (state format) £7.00

Orders and inquiries to:

Ted Kirk (MU), 33 Humber Crescent, Sutton Leach, St. Helens, Merseyside WA9 4HD.
Tel: 0744 818761

CLASSFAX

Classfax is designed to be an electronic class magazine for a top junior class. Content is created by the computer and teacher but most of it by the pupils. Updated on a daily basis. (The presentation should take under 10 minutes and the creation perhaps half a hour per day). Pupils are given different puzzles to solve and research to do. Features include school weather station reports. Class news, GRIDDLE maths puzzle, Birthday tune, sunset/rise times, Trakword puzzle, Sports reports, the "Bygone Times", Haiku creation, Bird cage etc.

The program is customized to your school and geographical location. When ordering, please give your chosen name of 6 to 9 letters e.g. BLENFAX, MAPLE-FAX, MACFAX, BEWNEWS, TORRACLE etc. 15 inclusive for BBC B, B+, Master (not compact).

SOMASOFT EDUCATIONAL SOFTWARE

1 Lees Barn Road, Radcliffe-on-Trent
Nottingham NG12 2DT
Tel: (06073) 4120

PCB Design on BBC, store on disc, plot on HI-80 or HPGL compatible, print on Epson compatible dot matrix **£20**

OHP Lay out view foils on screen, store on disc, mix design from disc plot on HI-80 or HPGL compatible **£20**

CALC 30 function complex number calculator programme. Enter & display $(x+jy)$ or $(z<0)$ format **£10**

VINDEREN ASSOCIATES
PO BOX 130, Belfast BT9 6NB.
Tel: 0232 660203/667885
MicroLink Mailbox MAG 11652

Disc Transfers on a BBC

BBC <-> MS-DOS BBC <-> CP/M
CP/M <-> MS-DOS Torch <-> MS-DOS

These four programs run on a BBC micro with a 1770 (B+, Master, Compact, B with 1770 upgrade); depending on the size of your BBC disc drives you can read and write over 40 different formats, including:

MS-DOS: Amstrad, Apricot, Atari, Nimbus, IBM PC, PS/2, Rainbow
CP/M: Acorn Z80, Amstrad, Epson, Kaypro, Osborne, 380/480Z, Quattro, Rainbow, IBM (CP/M-86)
Torch CPN, BBC DFS and ADFS

Prices: £19-50 each £34-50 for any two
£49-50 for any three £59-50 for all four

BAKsoft 20 Leys Avenue Cambridge CB4 2AW

Put your Micro in the picture!

ArVis BEEB-LOCK

We design and manufacture the most comprehensive range available of genlock and vision mixing systems for all models of Acorn/BBC micros including the ArVis audio/video interface for the Archimedes. Use our products to combine video pictures with captions, sub-titles, data and graphic images generated by your micro. Our systems are already in world-wide use by professional TV studios, educational, industrial, government and scientific establishments

VIDEO ELECTRONICS LIMITED
Wigan Rd., Atherton, Manchester M29 0RH
Tel: 0942-882332

Veren COMPUTER SYSTEMS

520 Reading Road
Winnersh
Berkshire
RG11 5EX
Tel. Reading (0734) 771455

EPSON HI 80

FOUR PEN PLOTTER
£295

WHILE STOCKS LAST

EPSON TWIN FLOPPY PC WITH MONOCHROME
TEXT ADAPTER AND TAXAN MONITOR

£485

PRICES EXC VAT. UK CUSTOMERS ADD £8 PER CARTON P&P
ANSWERPHONE SERVICE



WANTED - DOOM SURVIVORS

Remember your first adventure game? Rushing home, you watched the cassette slowly unwind its mystery into your computer: the beginnings of an addiction you've lived with ever since.

Maybe that game was 'Countdown to Doom' by Peter Killworth. Well, Peter has come up with another best-seller.

'Return to Doom' is Part 2 of Peter's Doom Trilogy. Will you return to that inhospitable planet to rescue the Ambassador of Regina? You know the scenario - well, some of it - but the puzzles are, quite simply, Peter at his best.

BBC/Master/+3/PCW/CPC/PC Versions all £12.95 inc. VAT and P&P from:



FREEPOST, PO Box 39, Stilton, Peterborough PE7 3BR
Tel: 0733 244682 (24 hours)



Carswell Computers

24 Elm Road, Faringdon, Oxon SN7 7EJ
Telephone (0367) 21153

TYPEASY Version 4

- Touch typing course for the BBC B, B+ Master & Electron
- Mistakes displayed with flashing letters
- Teaches correct finger movement
- 139 progressive exercises plus routines for writing more yourself
- Displays errors, speed and performance
disc (40 or 80 track) £15, Econet disc (80 track) £30, cassette £7.50

TYPE INVADERS

- Increases your speed - we guarantee!
- Letters and words rain down faster and faster - type correct letters to stop them
- 10 levels with 4 speeds plus colour and sound
- See review in Acorn User July '86
disc (40 or 80 track) £12.50, Econet (80 track) £25, cassette £7.50
Prices include P&P, please add 15% VAT

ALL IN STOCK SUBJECT TO AVAILABILITY

S.P. ELECTRONICS

BBC SPECIALISTS

ARCHIMEDES	From £801.00
BBC MASTER COMPACT	From £359.00
BBC MASTER 128	£425.00
Disc Operating System 8271	£75.00
Disc Operating System 1770	£49.95
G3WHO Rity Program (Tape)	£7.50
G3WHO Rity Program (Eprom Version)	£20.00
Circuit Board for Rity decoder (inc. instructions) Rity PCB	£10.00
Printer Cable (Centronics)	£12.90
Citizen 120D 120cps	£199.00
Data Recorder Acorn ALF03	£30.00
WORDWISE Word Processor	£33.00
Wordwise Plus Word Processor	£49.00
Slow Scan TV Circuit Board & Program (inc. instructions)	£17.50
ADFS	£29.90
Opus 5802 40/80 Track Disc Drive ExPSU	£125.50
Opus 5802SD 40/80 Track Disc Drive +PSU	£160.95

We are Acorn approved dealers & repair specialists

0% finance available on all Archimedes models.

Wide selection of software, books, leads, plugs, etc. All prices only while stocks last. All available Mail Order

2 High Street, Hucknall,
Notts. NG15 7HG
Tel: 0602 640377



Educational & Institutional orders welcome

Carriage Extra

(all prices include VAT)

The Money-Wise Accounts System makes others seem like hard work . . .

- No paperwork to do. Full printouts at any time.
- Does VAT instantly.
- Full access to ALL information, mistakes corrected in seconds.
- Handles incomplete and missing records.
- Late or early entries - no problem.
- Lists debtors, creditors and all account balances at any date.
- Directly checks bank statements (reconciliation).
- Handles hundreds of accounts, thousands of transactions - **simultaneously.**
- Very fast - does not access disk whilst running.
- Accounts Editor - makes corrections/alterations easy.
- Automatically checks for errors.
- Puts you in full control of your books

... The 16K ROM gives professional results for only £49.95 inc.

Phone (0742) 557229 for details of even more features

Derbyshire Software, 70 Lees Hall Avenue, Sheffield, S8 9JF

(Printer and disc drive not essential)

FREE - Printer utility disc, sample accounts & full instructions

SPIDER 2 REAL-TIME CONTROL FOR THE BBC MICRO

Watch the SPIDER!

- Powerful new BASIC commands for invoking PROCs from the User Port, Serial Port or the Keyboard.
- 8 independent countdown timers.
- Easy to install with no soldering.
- Comprehensive manual supplied.


New SPIDER 2 features

- Special keywords for controlling the Serial Port.
- Professional implementation of Foreground/Background processing.
- Reaction timing and pulse trains accurate to 0.1 milliseconds!

from £65 including VAT

SPIDER 2 is a RAM/ROM combination which uses none of the BBC's memory, so BASIC programs are unaffected. The BBC B+ is fully supported and we supply a complete range of digital, analogue and serial interfaces for use with SPIDER using the 1MHz bus. Ask now for details.

Available for BBC B, B+ and Master
Paul Fray Ltd
Willowcroft, Histon Road, Cambridge CB4 3JD
Telephone: (0223) 66529



SPIDER - stamps out I/O bugs

ADVERTISERS' INDEX

4mation	118	Mandarin Software	98
21st Software	44	Manor Court Supplies	117
Acorn Computers	3	Maths Workshop	27
Advanced Memory Systems	163	Mayers Leisure Products	68
Aeon Computer House	82	Mayhew Telonics	150
Apex Software	150	Meadow Computers	123
Automatic Services	117	Meedmore Distribution	76
B&S Computing	23	Micro-Aid	162
Baksoft	161	Microboss	68
Beebug	6,54	Microhelp	132
Blue Chip Computers	162	MicroLink	138,139
CJE Micros	24	Microman	25
Cantocks	146	Micromedia	45
Care Electronics	123	Micronet	35
Carswell Computing	161	Microsol	60
Centec	62	Microstudio	134
Clares	22	Minerva Systems	12
Codil Language Research	94	Mitsubishi	8
Commonside	30	Morley Electronics	18,19
Computaccount	66	Nebulae	132
Computech	45	Overseas Media Distribution	90
Compupek	76	P&H Electronics	11
Computer Concepts	14,93	Paul Fray	162
Computer Express	46	Peartree Computers	20,21
Computer Repairs	118	Pineapple Software	61
Coniston Electronics	146	Riverside Systems	120
Contex Computing	146	SMB Computer Electronics	140
CP Microsystems	120	Selec	118
Dabs Press	123	Silicon Vision	68
Database Electronics	142	Software Bargains	71
Database Software	156,157	Solidisk Technology	26,27
Datastore	120	Somasoft	161
Delta Computers	90	S.P. Electronics	162
Derbyshire Software	162	Star Micronics	85
Design Consultancy	94	Superior Software	2,79,155,164
Design Dynamics	88	Synergy Software	88
Design People Software	61	System	92
Dram Electronics	144	Taxan	48,49
Edusoft	150	Teachers Software	148
Electron & BBC Micro User Show	38	Technomatic	124-129
Electro Music Research	94	Ted Kirk	161
Fairhurst Instruments	148	Topologika	161
Flora	120	Towerhill	56,57
Future Place	134	Twillstar	36
Hotel California	135	Veren Computer Systems	161
Impact	53	Video Electronics	161
Integrex	80	Viglen	15-17
Intelligent Machines	117	Vinderin Associates	161
Ixchel Software	150	Vine Micros	74
J&J Microchips	118	Voltmace	29
Keyzone Computer Products	144	Watford Electronics	100-113
Lightspeed Software	148	Weserve	74
M&M Computers	28	Willow Software	60

FAMILY HISTORY SYSTEM

Health Warning: Genealogy is Addictive

PAYROLL (Wages) ACCOUNT-PLUS

Prices: £20.52, £57.44 & £57.44 inc VAT



Micro Aid

25 Fore St., Praze, Camborne, Cornwall TR14 0JX
Telephone: 0209-831274 and ask for Colin



COMPUTER REPAIR SERVICE

BBC AMSTRAD COMMODORE SPECTRUM


- ★ Amstrad, Acorn and Brother authorised service centres
- ★ All repairs fully guaranteed
- ★ Fixed low prices or free estimates
- ★ Repairs returned within 48 hrs
- ★ Trade enquiries also welcome

CONTACT ELAINE EDGAR AT:
BLUE CHIP COMPUTERS LIMITED
2 GLASGOW RD, CORSTORPHINE
EDINBURGH EH12 8HL



031-334 6058

IT'S SURPRISING THE TYPE OF PEOPLE
MAKING THE HEADLINES THESE DAYS.

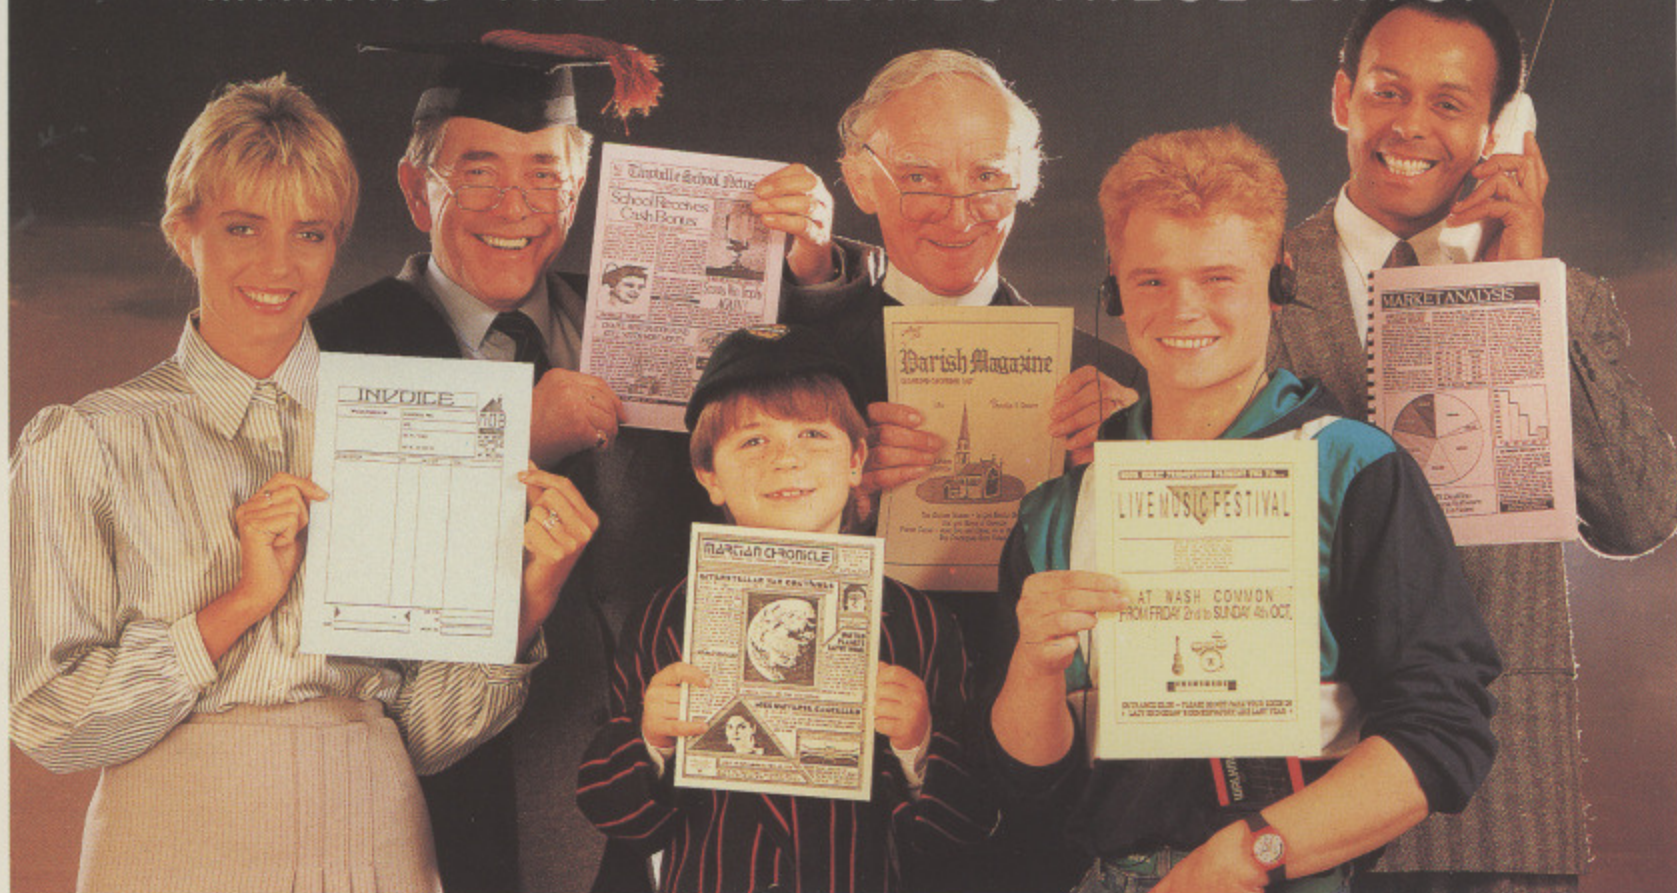

STOP PRESS

'Stop Press' puts you right at the heart of the Desktop Publishing Revolution. Utilising dynamic WYSIWYG (What You See Is What You Get) facilities, 'Stop Press' makes it simple to create professional newsletters, leaflets, flyers, forms or in fact anything where text and graphics are required.

'Stop Press' is the ideal publishing software solution for home enthusiasts, schools, societies and small businesses.

READ ALL ABOUT IT

Documents may be prepared using any of the superb selection of typefaces (12 or more) supplied or alternatively a typeface of your own design.

Text can be entered from within 'Stop Press' or imported from your preferred word processor with fully automatic on-screen text formatting as the file loads.

Centering, ragged right, and literal justification are all available. There also is full pixel resolution control over character size and spacing.

GRAPHIC DESIGN

As well as the ability to import digitised images there are outstanding facilities for drawing, spraying and painting using either the patterns supplied or your own pattern designs, enabling you to produce graphs, charts, diagrams and pictures.


These can then be pasted, cropped or re-sized to fit any layout, and for those finishing touches a fantastic zoom is available.

HOT OFF THE PRESSES

At anytime your pages can be previewed before being output to a wide range of Epson or compatible dot matrix printers.

AMX MOUSE

'Stop Press' can be used with a joystick or keyboard but the AMX MK III Mouse gives you the control and flexibility which you would expect from the most accurate pointing device available. Produced in Switzerland the AMX Mouse has a unique patented design which includes high resolution movement (D.P.I.) and superior ball technology to ensure that contact between the Mouse and surface is constant at all times.



EXTRA! EXTRA!

Complimenting 'Stop Press', Extra! Extra! is a superb collection of ready made clip art and new typefaces covering a wide variety of subjects and styles.

'STOP PRESS' IS AVAILABLE FOR	SOFTWARE ONLY	WITH AMX MK. III MOUSE	EXTRA! EXTRA!
ACORN BBC/B+/MASTER	£49.99	£79.99	£24.99
AMSTRAD PCW 8256/8512	£49.99	£89.99	—
AMSTRAD CPC 6128	£49.99	£79.99	£24.99
COMMODORE 64/128	£39.99	£69.99	—

These superb products are available from all good computer dealers or direct by cheque, Access or Visa. All prices include VAT, postage and packing. Become your own publishing baron with 'Stop Press' and start the presses rolling.

AMS

ADVANCED MEMORY SYSTEMS LIMITED

Imagination at your fingertips

FOR INSTANT ACCESS OR VISA ORDERS TELEPHONE: (0925) 413501.

ADVANCED MEMORY SYSTEMS LIMITED 166-170 WILDERSPOOL CAUSEWAY, WARRINGTON WA4 6QA.

TELEPHONE: (0925) 413501 TELEX: 628672 AMS G FAX: 0925 58039

TUBELINK ON MICRONET 800 *TUBELINK # SUPPORTS THE AMX MOUSE AND ALL AMS SOFTWARE.

SPYCAT

An Interactive Exposé of M.I.4½




The London Skyline Viewed from Blackhall



Outside No. 10 Downing Street



Meeting the P.M.



Waiting to see "M"

All the Thrills and Intrigue of the World of Espionage

Spycat is a skilfully-written arcade adventure game which takes place amongst the corridors of power in Blackhall, Downing Street and the M.I.4½ underground surveillance complex.

You play the role of Spycat: a cat with a purpose. You are devoted to spending your life embroiled within the fascinating but dangerous arena of professional secrets. It's a good career — full of security; and when you retire you can always supplement your pension by emigrating to Greenland and publishing your memoirs.

The game features nearly 100 different screens, with 30 different objects — including computers and passports — to locate and employ in appropriate ways. An icon-driven control system is used to orchestrate your manoeuvres and actions. There are secret passages to discover, and hatches and lifts to assist your progress. Guest appearances are made by: the Prime Minister and the spy-chiefs "Q" and "M".

Spycat is a thoroughly captivating game. To complete the adventure, you will need to use clear logical thought as well as fast reactions and arcade skills. Your life as an undercover cat may not be easy but it will always be exciting!

BBC Micro Cassette.....\$9.95 Acorn Electron Cassette.....\$9.95
 BBC Micro 5¼" Disc.....\$11.95 BBC Master Compact 3½" Disc.....\$14.95

(Compatible with the BBC B, B+ and Master Series computers)

PRIZE COMPETITION

The first prize in our competition is a specially-produced ESPIONAGE KIT (worth over £100) comprising: quality prism binoculars, a mini camera, a mini cassette-recorder, invisible ink pens, and a book on codes and ciphers. There are 20 congratulatory certificates for runners-up.


To enter the competition, you must complete the game and write to us describing the final messages that you receive.

Closing Date: 31st July, 1988.

SUPERIOR SOFTWARE
 Limited

ACORNSOFT

Please make all cheques payable to "Superior Software Ltd".




24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately. (This does not affect your statutory rights)

AT

é of M.I.4 1/2



Meeting the P.M.



Waiting to see "M"

the World of Espionage

The game features nearly 100 different screens, with 30 different objects including computers and passports — to locate and employ in appropriate ways. An icon-driven control system is used to orchestrate your manoeuvres and actions. There are secret passages to discover, and hatches and lifts to assist your progress. Guest appearances are made by: the Prime Minister and the spy-chiefs "Q" and "M".

Mycat is a thoroughly captivating game. To complete the adventure, you will need to use clear logical thought as well as fast reactions and dexterity skills. Your life as an undercover cat may not be easy but it will be exciting!

PRIZE COMPETITION

The first prize in our competition is a specially-produced ESPIONAGE KIT (worth over £400) comprising: quality prism binoculars, a mini camera, a mini cassette-recorder, invisible ink pens, and a book on codes and ciphers. There are 20 congratulatory certificates for runners-up.

To enter the competition, you must complete the game and write to us describing the final messages that you receive.
Closing Date: 31st July, 1988.

Please make cheques payable to Superior Software Ltd.



24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE
• All mail orders are despatched within 24 hours by first-class post.
• Postage and packing is free.
• Faulty cassettes and discs will be replaced immediately.
(This does not affect your statutory rights)

A Database Publication

THE MICRO USER

THE MICRO USER

Volume 6
Number 3
May 1988
£1.25

BODY BUILDING

An easy-to-build rainfall gauge

COMMS

The new MicroLink modem evaluated

PROLOG

Teach logic to your BBC Micro

GAME

Meet the challenge in Chinese Chess

UTILITIES

- Directory kill
- Wordwise clock

Z88


- Enhanced display
- The Withered Toad

REVIEWS

- Star printer
 - System DeltaPlus
 - Promptwriter
- ... plus all the latest software

STAR GAZING

on the BBC Micro

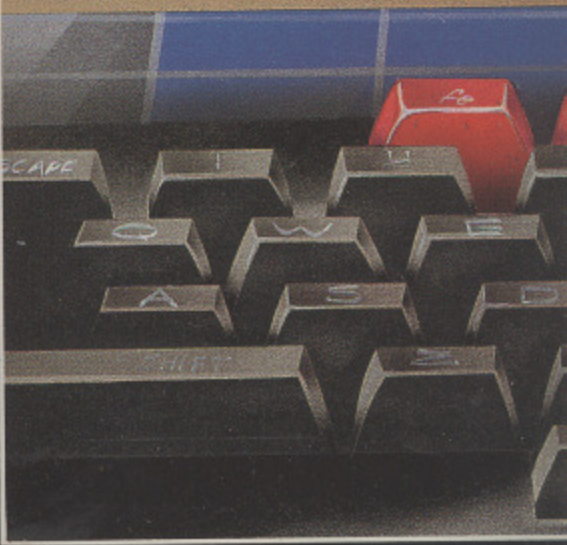

May 1988

Vol. 6 No. 3