

# CIC-56SS-40D-B6-TI

## 56-Lead SSOP to a 40-Pin DIP

Mar-98


### SSOP DEVICES: (EXAMPLES)

DA28F016XS<sup>A</sup>      DA28F320J5  
 DA28F160S3 / S5<sup>B</sup>      DA28F640J5  
 DA28F320S3 / S5<sup>C</sup>

**SOCKET:** Texas Instruments CSP056-054

PRICING:	QTY	PRICE EACH
	1-4	\$180.00
	5-9	\$162.00
	10-24	\$153.00
	25-49	\$135.00

### TYPICAL DIMENSIONS: (Drawings not to scale)

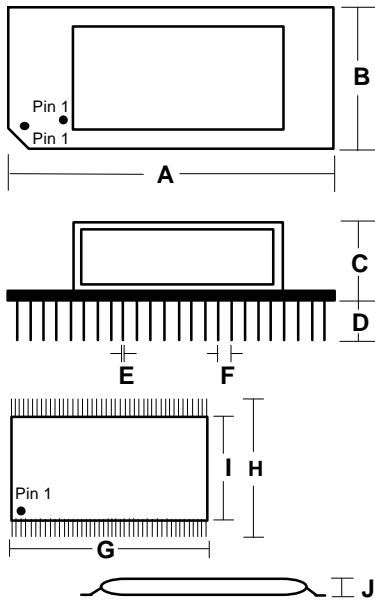

DIMENSION	MM	INCH
A	62.23	2.450
B	33.02	1.300
C	17.78	0.700
D Pin Length	10.16	0.400
E Pin Diameter	0.64	0.025
F Pin Spacing	2.54	0.100
ROW SPACING	15.24	0.600
G	23.70	0.933
H	16.00	0.630
I	13.30	0.524
J	1.80	0.071
PITCH	0.80	0.031

### PIN CONFIGURATION:

BASE 40-Pin DIP	PIN NAMES	SOCKET 56-Lead SSOP
1	V <sub>PP</sub>	56
2	3/5# <sup>A</sup> / NC <sup>B,C</sup>	6
3	NC <sup>A,B</sup> / A <sub>21</sub> <sup>C</sup>	8
4	ADV# <sup>A</sup> / NC <sup>B,C</sup>	35
5	CLK <sup>A</sup> / NC <sup>B,C</sup>	34
6	CE <sub>1</sub> #, CE <sub>0</sub> # <sup>1</sup>	7, 1
7	A <sub>20</sub>	9
8	A <sub>19</sub>	10
9	A <sub>18</sub>	11
10	A <sub>17</sub>	12
11	GND (Plane 2)	15, 44
12	DQ <sub>7</sub>	18
13	DQ <sub>6</sub>	16
14	DQ <sub>5</sub>	25
15	DQ <sub>4</sub>	27
16	DQ <sub>3</sub>	31
17	DQ <sub>2</sub>	33
18	DQ <sub>1</sub>	40
19	DQ <sub>0</sub>	38
20	OE#	21
21	A <sub>0</sub>	37
22	A <sub>1</sub>	51
23	A <sub>2</sub>	50
24	A <sub>3</sub>	49
25	A <sub>4</sub>	48
26	A <sub>5</sub>	47
27	A <sub>6</sub>	46
28	A <sub>7</sub>	45
29	A <sub>8</sub>	43
30	GND (Plane 5)	29
31	A <sub>9</sub>	52
32	A <sub>10</sub>	53
33	A <sub>11</sub>	53
34	A <sub>12</sub>	2
35	A <sub>13</sub>	3
36	A <sub>14</sub>	4
37	A <sub>15</sub>	5
38	A <sub>16</sub>	13
39	WE#	22
40	V <sub>CC</sub> (Plane 3)	14, 42
40	V <sub>CC</sub> (Plane 4)	28
V <sub>CC</sub> Plane 3	WP#	23
V <sub>CC</sub> Plane 3	RP#	55
GND Plane 2	BYTE#	36

### NOTES:

- CE<sub>1</sub># (pin 7) and CE<sub>0</sub># (pin 1) are tied to gether on PC board.
- RY/BY#<sup>A</sup>, STS<sup>B,C</sup> (pin 20), DQ<sub>15</sub> - DQ<sub>8</sub> (pins 19,17,24,26,30,32,41,&39) are not connected.
- Bypass capacitors (Type 1206) may be added between V<sub>CC</sub> planes (3,4) & GND planes (2,5); as required by Programmer Vendor

## CALIFORNIA INTEGRATION COORDINATORS, INC.

(530) 626-6168  
 FAX: 626-7740

656 MAIN STREET  
 PLACERVILLE, CA 95667

E-mail: [cic@cic-inc.com](mailto:cic@cic-inc.com)  
<http://www.cic-inc.com>