



EMULATION TECHNOLOGY, INC.

Specification Number: M1784

PROGRAMMING ADAPTER SPECIFICATION


Item: 564002TS600YAMS

Description: AS-56-40-02TS-6YAM-GANG-S (Rev. B)

REPLACEMENT SOCKET: S-TSO-00-056-A

Call Emulation Technology for a replacement socket price and delivery quote.


TYPICAL DIMENSIONS:

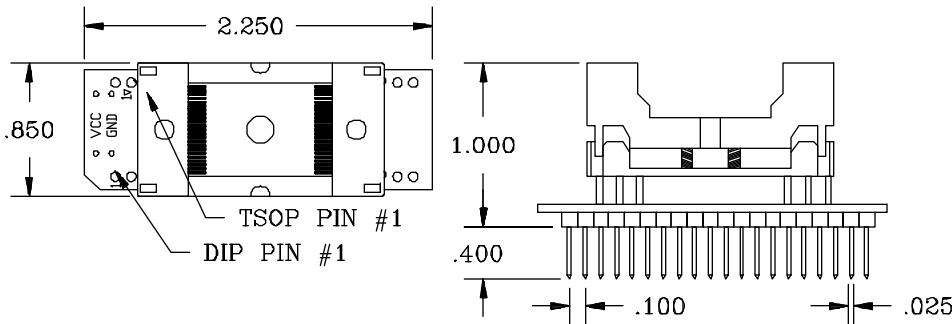

All Dimensions in Inches.

(Assembly Drawing: F1784)

PACKAGE SPECIFICATIONS:

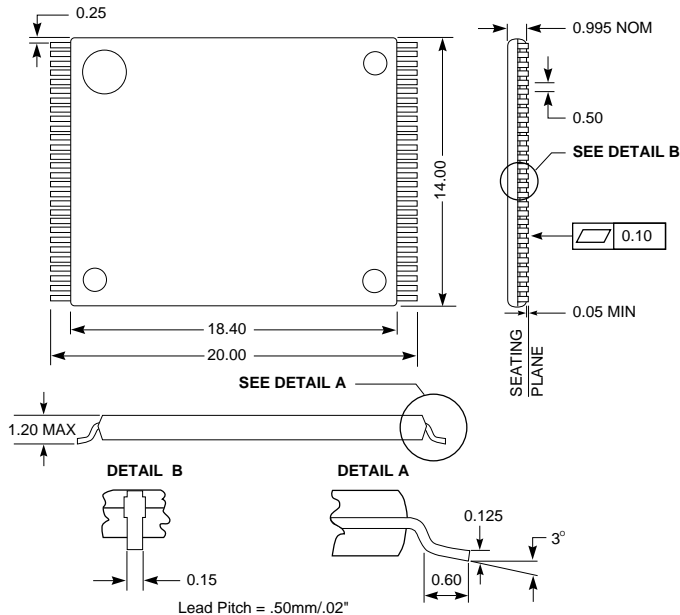

All Dimensions in Millimeters.

ET Code: 056-TS01

Compatible TSOP devices:

E28F200BL E28F400BL
E28F200BV E28F400BV
E28F200BX E28F400BX

Manufacturer:

Intel

Programmers:

Aval Data: PKW-5100
B&C Microsystems: Proteus(UP40, GEP8/16)
Bytek: EZ-FT
Elan: 6000, 4000/5000 TURBO,
and 3000/4000/5000

CONNECTION TABLE:

56-Lead TSOP SOCKET	PIN Names	40-Pin DIP Base
1	NC	NO TRACE
2	NC	NO TRACE
3	A15	38
4	A14	37
5	A13	36
6	A12	35
7	A11	34
8	A10	33
9	A9	32
10	A8	31
11	NC	NO TRACE
12	NC	NO TRACE
13	WE#	39
14	RP#	5
15	NC	NO TRACE
16	NC	NO TRACE
17	V _{PP}	1
18	WP#/DU	V _{CC} Plane
19	NC	8
20	NC/A17	9
21	A7	29
22	A6	28
23	A5	27
24	A4	26
25	A3	25
26	A2	24
27	A1	23
28	NC	NO TRACE
29	NC	NO TRACE
30	NC	NO TRACE
31	A0	22
32	CE#	2
33	GND	11 & 30
34	OE#	20
35	DQ0	19
36	DQ8	NO TRACE
37	DQ1	18
38	DQ9	NO TRACE
39	DQ2	17
40	DQ10	NO TRACE
41	DQ3	16
42	DQ11	NO TRACE
43	V _{CC}	40
44	V _{CC}	40
45	DQ4	15
46	DQ12	NO TRACE
47	DQ5	14
48	DQ13	NO TRACE
49	DQ6	13
50	DQ14	NO TRACE
51	DQ7	12
52	DQ15/A-1	21
53	GND	11 & 30
54	BYTE#	GND Plane
55	A16	10
56	NC	NO TRACE
NO TRACE	NC	3
NO TRACE	NC	4
NO TRACE	NC	6
NO TRACE	NC	7



EMULATION TECHNOLOGY, INC.

2344 WALSH AVENUE • BUILDING F
SANTA CLARA, CA 95051-1301

TEL 408 / 982.0660 • FAX 408 / 982.0664

Call today for a FREE Full Line Catalog and Unlimited Application Consulting!

Page 1 of 1
Date: 10/24/96
Rev: H

The Emulation Technology logo is a registered trademark of Emulation Technology, Inc.