


MABAES0054

<http://www.macom.com/DataSheets/MABAES0054%20REV%20A.pdf>

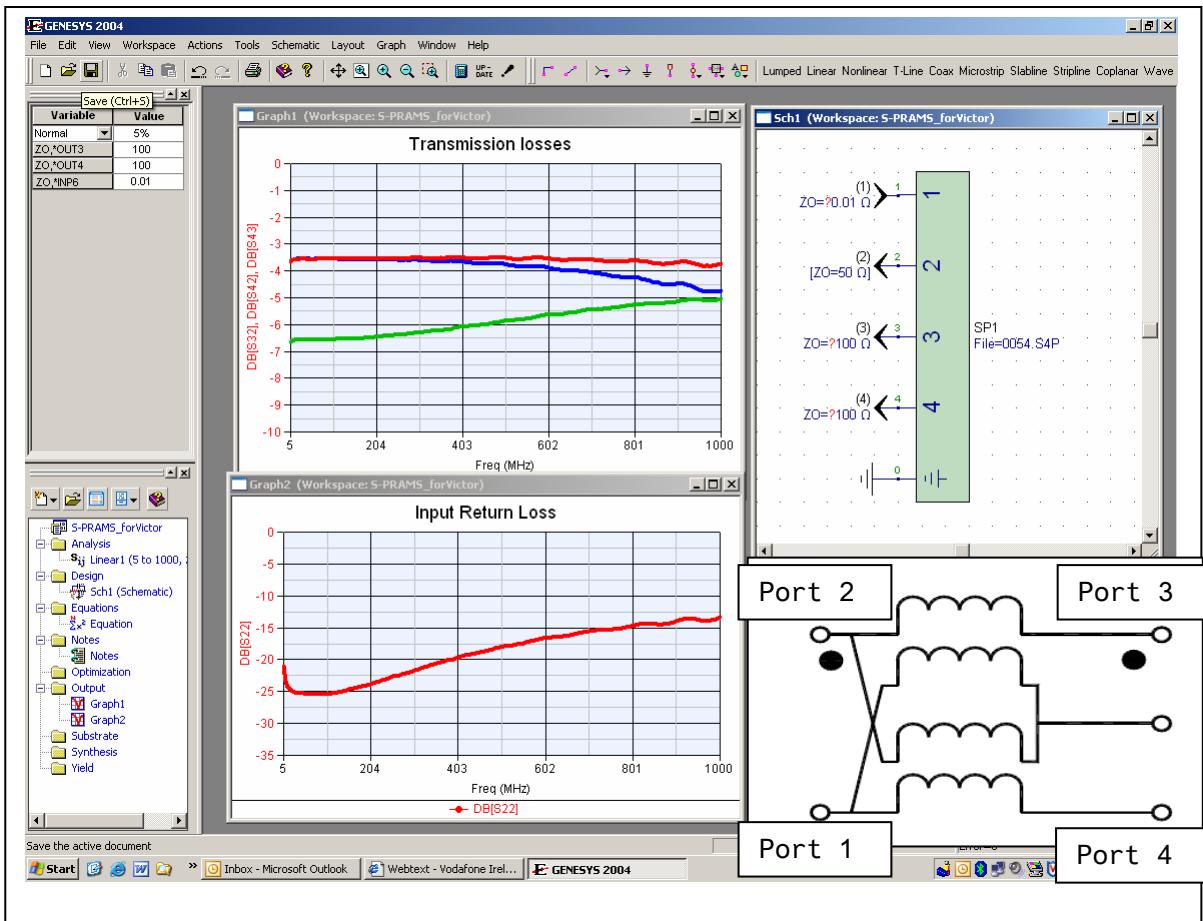

#	MHz	S	RI	R	50			
!FREQ	R1	I1	R2	I2	R3	I3	R4	I4
5	0.068649	0.095596	0.680695	0.080414	0.385956	0.009949	-0.38477	-0.0085
	0.680084	0.080841	0.069962	0.094292	-0.38687	-0.00708	0.387878	0.0077
	0.386017	0.009949	-0.3866	-0.00735	-0.22188	0.030853	-0.77139	-0.0094
	-0.38483	-0.00845	0.387939	0.007904	-0.77118	-0.00943	-0.22188	0.0315
9.975	0.08522	0.05661	0.695709	0.043732	0.387665	0.003418	-0.38596	-0.0008
	0.69455	0.043854	0.086838	0.055641	-0.38785	-0.0002	0.389313	0.0015
	0.387451	0.003647	-0.38745	-0.00031	-0.21712	0.028931	-0.77246	0.0111
	-0.38571	-0.00085	0.388992	0.001572	-0.77283	0.011047	-0.21741	0.0294
14.95	0.090614	0.041626	0.699615	0.028229	0.388245	1.53E-05	-0.38629	0.0037
	0.699066	0.028656	0.09227	0.040718	-0.38791	0.003464	0.389236	-0.002
	0.388412	0.000687	-0.38791	0.002884	-0.21474	0.031769	-0.7724	0.0245
	-0.38638	0.003433	0.389465	-0.00145	-0.77222	0.023956	-0.21478	0.0331
19.925	0.093147	0.034042	0.701874	0.018951	0.388412	-0.00224	-0.38631	0.0069
	0.70105	0.01825	0.094711	0.032959	-0.38773	0.006516	0.38945	-0.0044
	0.388214	-0.00252	-0.38748	0.006638	-0.21284	0.035995	-0.77078	0.0361
	-0.38632	0.007156	0.389313	-0.00462	-0.7713	0.036346	-0.21253	0.0376
24.9	0.094513	0.029812	0.703033	0.012115	0.389038	-0.0047	-0.38655	0.0104
	0.702271	0.012085	0.095917	0.028625	-0.38797	0.00946	0.389496	-0.0074
	0.389099	-0.00475	-0.38789	0.009659	-0.21093	0.04155	-0.76971	0.0478