# Plug-In **Frequency Mixer**

# Level 7 (LO Power +7 dBm) 2 to 600 MHz


#### Maximum Ratings

Operating Temperature	-55°C to 100°C				
Storage Temperature	-55°C to 100°C				
RF Power	50mW				
IF Current	40mA				
Permanent damage may occur if any of these limits are exceeded.					

#### **Pin Connections**

LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

### **Outline Drawing**



Outline Dimensions ( inch )								
Α	В	С	D	E	F			
.480	.500	.240	.255	.210	.230			
12.19	12.70	6.10	6.48	5.33	5.84			
G	Н	J	ĸ	L	wt			
.16	.100	.14	.20	.020	grams			
4.06	2.54	3.56	5.08	0.51	1.9			

#### **Features**

- low conversion loss, 5.85 dB typ.
- excellent isolation, 42 dB typ. L-R, 47 dB typ. L-I
- rugged welded construction

### **Applications**

#### • VHF/UHF

• defense & federal communications



+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

#### **Electrical Specifications**


	UENCY Hz)			B)	LOSS	LC	D-RF ISOL/ (dB)	ATION	LO-IF ISOLATION (dB)		IP3 at center band (dBm)	
LO/RF	IF		m		Total	L	M	U	L	M	U	(ubiii)
ff_		x	σ	Max.	Range Max.	Тур. Мі	n. Typ. Min	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Тур.
2-600	DC-600	5.85	0.04	7.0	8.0	60 50	0 42 30	37 25	60 45	47 30	36 22	16
1 dB COM	IP.: +1 dBm	n typ.				L =	low range [f	to 10 f,]	M = mid rang	ge [10 f, to f,	/2] U = u	pper range [f,/2 to f,]

m= mid band [2f, to f,/2]

### **Typical Performance Data**

Typical Ferrormanoe Data									
	uency IHz)	Conversion Loss (dB)	lsolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)			
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm			
2.00 4.00 5.00 20.00 50.00 81.73 100.00 161.47 200.00	32.00 34.00 35.00 40.00 50.00 80.00 51.73 70.00 131.47 170.00	6.81 6.40 6.34 6.25 6.21 6.13 6.16 6.18 6.08 6.03	81.85 76.35 74.35 69.58 64.25 57.73 53.89 52.31 49.28 47.46	72.15 68.25 66.65 62.18 57.65 50.60 46.89 45.35 42.03 40.24	1.56 1.31 1.25 1.15 1.11 1.10 1.13 1.14 1.20 1.27	2.71 2.64 2.62 2.47 2.51 2.46 2.41 2.37 2.31 2.29			
241.20 281.07 300.00 320.93 400.00 480.40 500.00 560.13 580.07 600.00	211.20 251.07 270.00 290.93 370.67 450.40 470.00 530.13 550.07 570.00	6.04 6.04 6.09 6.08 5.99 6.06 6.11 6.15 6.19 6.26	46.41 45.16 44.55 44.04 42.93 40.46 40.16 39.99 40.02 39.76	38.76 37.18 36.84 35.94 33.45 30.91 30.63 29.30 29.24 28.69	1.33 1.38 1.42 1.50 1.58 1.66 1.71 1.77 1.86 1.88	2.26 2.28 2.30 2.31 2.32 2.33 2.33 2.33 2.35 2.36 2.38			

#### **Electrical Schematic**




A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Nlin-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Nlini-Circuit standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/NCLStore/terms.jsp

# Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

# **Performance Charts**

# TUF-1+

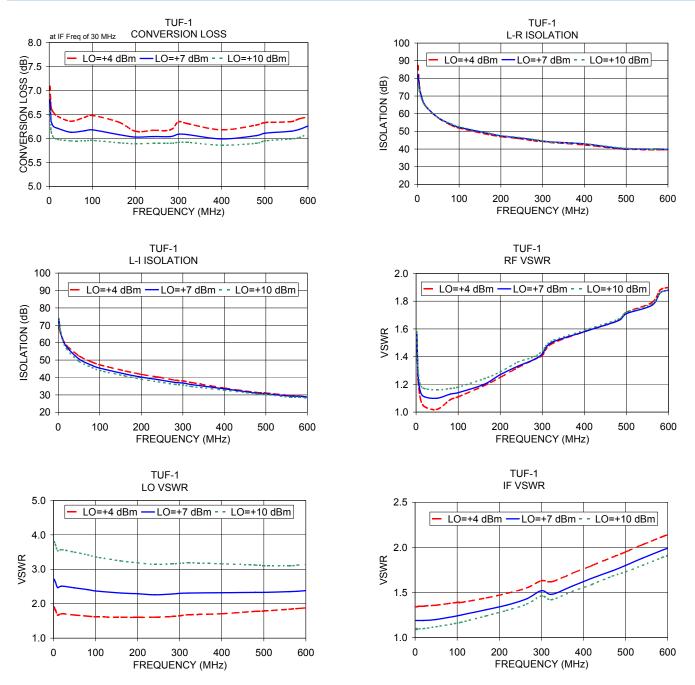

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuit shandard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

## **Mini-Circuits**