


High Power Tx/Rx Input Protection Module

MA25200A
500 kHz to 1600 MHz

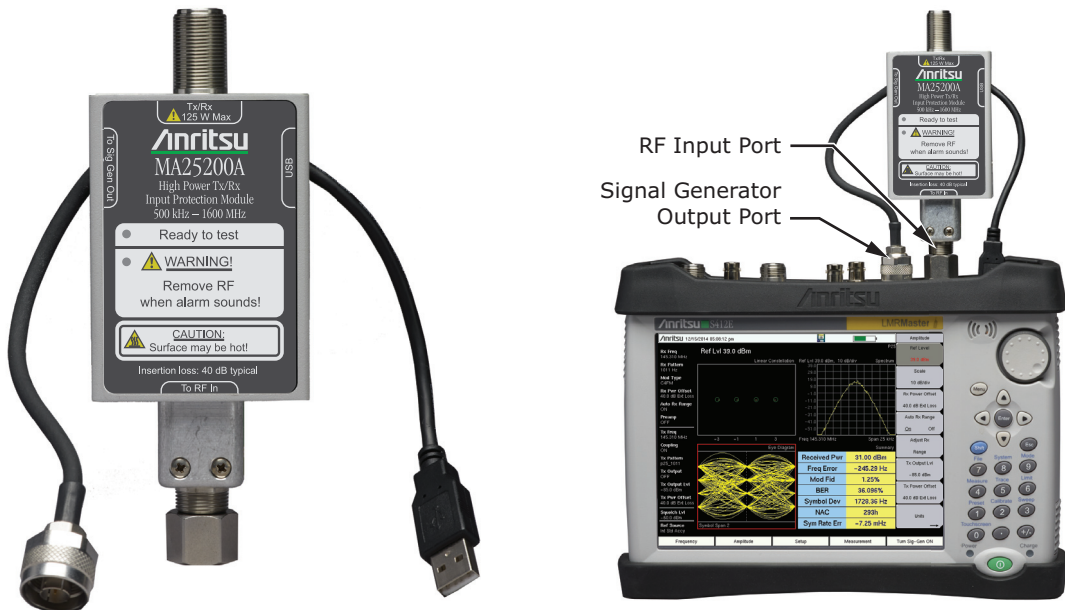

MA25200A Description

Use the MA25200A high power protection module to safeguard the S412E ports from high power portable, mobile, or base station transmitters. The MA25200A attenuates RF power levels up to +51 dBm (125 W) to safe levels for measurements. The MA25200A connects and mounts to the RF input connector. It has an N(m) coaxial input cable that connects to the Signal Generator output. The top N(f) connector can be connected directly to portable or mobile antenna ports or base station transmit or receive ports. The nominal 40 dB insertion loss applied to the RF input port and signal generator output ports can be compensated in the S412E amplitude offset menus so that the displayed levels match the levels at the input of the MA25200A. The MA25200A provides a very flat ± 1 dB insertion loss response (up to 1 GHz) to support accurate amplitude measurements.

Specifications¹

Maximum Input Power	+51 dBm (125 W) for one minute or until alarm sounds
Maximum Continuous Input Power	+44 dBm (25 W)
Insertion Loss	RF In Port: 40 dB \pm 1 dB, 500 kHz to 1.6 GHz, typical Signal Generator Out: 40 dB \pm 1 dB 500 kHz to 1.0 GHz, \pm 2.0 dB > 1.0 GHz to 1.6 GHz, typical
Alarm	Audible alarm at 90 °C, nominal
Power Supply	USB power supplied by instrument for cooling fan and alarm
Cool Down Time	From 90 °C: 2 minutes, typical
LED Indicators	Green LED: Ready Red LED: Internal temperature > 100 °C, typical
Size	64 mm x 162 mm x 60 mm (2.5 in x 6.4 in x 2.4 in)
Weight	583 g (20.6 oz)
Case	760-279-R, padded nylon case

1. RF specifications apply when connected to a 50 Ω source.



The Master Users Group is an organization dedicated to providing training, technical support, networking opportunities and links to Master product development teams. As a member, you will receive the Insite Quarterly Newsletter with user stories, measurement tips, new product news and more. Visit us to register today: www.anritsu.com/mug



Customers in the United States can receive a quote to purchase a product or order accessories by visiting our online ordering site: www.ShopAnritsu.com

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Company

1155 East Collins Blvd, Suite 100
Richardson, TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 Bela Vista, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green
Luton, Bedfordshire LU1 3LU
United Kingdom
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

12 Avenue du Québec
Bâtiment Iris 1-Silic 612
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129
00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Kistagången 20B
164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kay Fiskers Plads 9
2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

27th Floor, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, Xu Hui Di District
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F, Greenfield Tower
Concordia Plaza
No. 1 Science Museum Road, Tsim Sha Tsui East
Kowloon, Hong Kong, P. R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi
Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu
Seongnam-si
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road
Notting Hill, Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd, Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20141016



© Anritsu All trademarks are registered trademarks of their respective companies. Data subject to change without notice. For the most recent specifications, visit: www.anritsu.com. Anritsu utilizes recycled paper and environmentally conscious inks and toner.

MA25200A High Power Rx/Tx Protection Module TDS
Copyright February 2015 Anritsu Company, USA
All Rights Reserved



11410-00837



A