

VSS 500M12S2

VOLTAGE SURGE SIMULATOR



FOR TESTS ACCORDING TO ...

- › IEC 60065
- › UL 6500

VOLTAGE SURGE SIMULATION

As per safety test requirements the insulation between accessible parts or parts connected to them and hazardous live parts shall be able to withstand surges due to transients, caused e.g. by lightning events and entering the apparatus through the antenna terminal. The voltage surge simulator VSS 500M12S2 generates high voltage transients as required by IEC 60065 and UL 6500 standards for safety tests on audio, video and similar electronic apparatus.

HIGHLIGHTS

- › **SURGE VOLTAGE UP TO 10KV**
- › **GENERATOR DESIGNED TO COMPLY WITH IEC 60065**
- › **GENERATOR DESIGNED TO COMPLY WITH UL 6500**
- › **INTERLOCK**
- › **WARNING LAMP CONTROL**
- › **MANUAL OPERATION**
- › **RS232 AND GPIB INTERFACE**

APPLICATION AREAS

-  COMPONENTS
-  INDUSTRY
-  RESIDENTIAL

TECHNICAL DETAILS

VOLTAGE SURGE SIMULATOR, PULSE AS PER IEC 60065

Voltage (o.c.)	500V - 10,000V \pm 10%
Surge capacitor	1nF
Series resistor	1,000ohm
Parallel resistor	$>$ 15Mohm
Polarity	Positive
Event counter	1 - 30,000 or endless

TRIGGER

Automatic	Automatic pulse release
Manual	Single pulse release
External	External pulse release
CRO trigger	5V trigger signal for oscilloscope
Pulse repetition rate	max. 1Hz (1s - 999s)

OUTPUT

Direct	Via HV connector; Zi = 1,000ohm
--------	---------------------------------

TEST ROUTINES

Quick Start	Immediate start; easy-to-use and fast
User Test routines	Change Polarity after n pulses Change voltage after n pulses
Service	Service, set-up, self test

INTERFACE

Serial interface	RS 232, baud rate 1200 - 19200
Parallel interface	IEEE 488, address 1 - 30


SAFETY

Safety circuit	Control input (24Vdc)
Warning lamp	Floating output contact

GENERAL DATA

Dimensions, weight	19"/3HU, approx. 12kg
Supply voltage	115/230V +10/-15%
Fuses	2 x T 2AT (230V) or 2 x T 4AT (115V)

COMPETENCE WHEREEVER YOU ARE

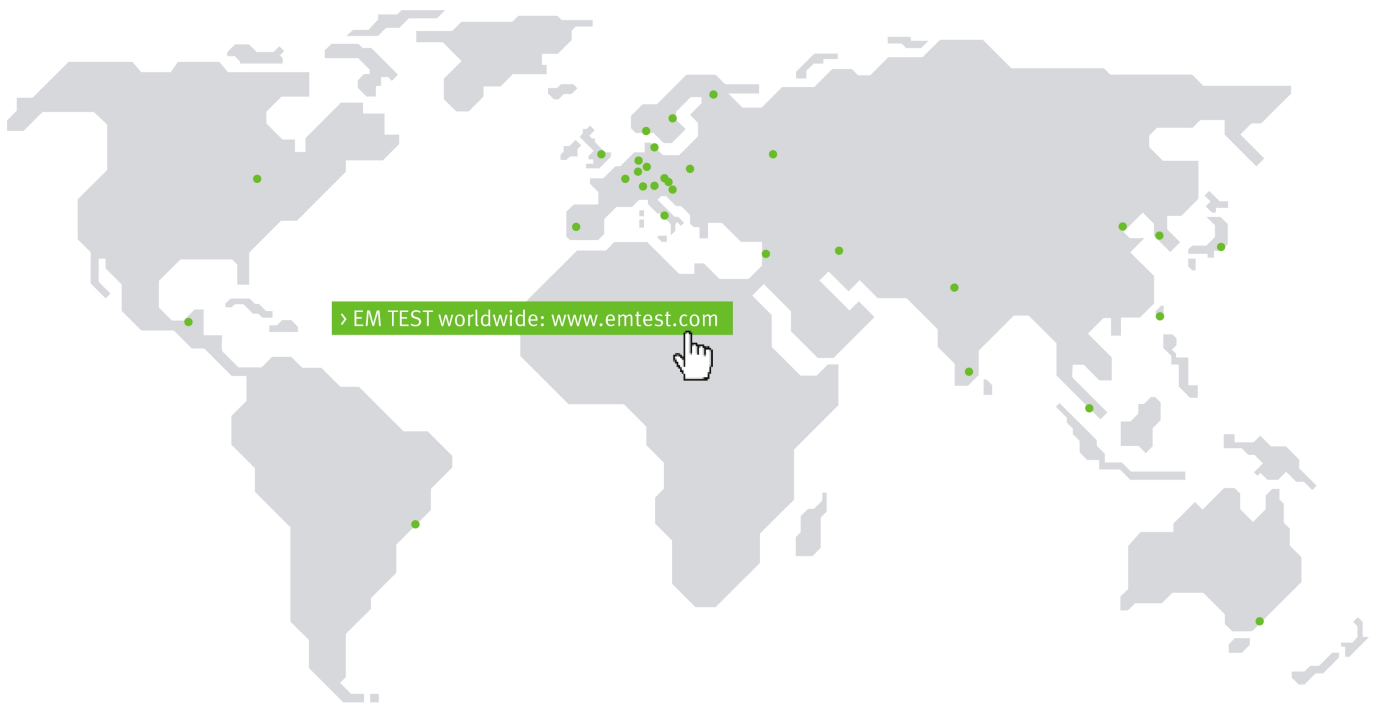

CONTACT EM TEST DIRECTLY

Switzerland

EM TEST AG › Sternenhofstraße 15 › 4153 Reinach › Switzerland
Phone +41 (0)61/7179191 › Fax +41 (0)61/7179199
Internet: www.emtest.ch › E-mail: sales@emtest.ch

Germany

EM TEST GmbH › Lünener Straße 211 › 59174 Kamen › Deutschland
Phone +49 (0)2307/26070-0 › Fax +49 (0)2307/17050
Internet: www.emtest.com › E-mail: info@emtest.de

France

EM TEST FRANCE › Le Trident - Parc des Collines › Immeuble B1 - Etage 3 ›
36, rue Paul Cézanne › 68200 Mulhouse › France
Phone +33 (0)389 31 23 50 › Fax +33 (0)389 31 23 55
Internet: www.emtest.fr › E-mail: info@emtest.fr

P.R. China

EM TEST Representative Office Beijing › Rm 913, Leftbank ›
No. 68 Bei Si Huan Xi Lu › Haidian District › Beijing 100080 › P.R. China
Phone +86 (0)10 82 67 60 27 › Fax +86 (0)10 82 67 62 38
Internet: www.emtest.com › E-mail: emtestbj@public.bta.net.cn

Malaysia

EM TEST (M) SDN BHD › Unit B2-6, Jalan Dataran SD2 › Dataran SD2, PJU9 ›
Bandar Sri Damansara › 52200 Kuala Lumpur › Malaysia
Phone +60 (03)62 73 22 01 › Fax +60 (03)62 74 22 01
Internet: www.emtest.com › E-mail: sales@emtest.com.my

Poland

EM TEST Polska › ul. Lema 33, 26-613 Radom › Polska
Phone +48 518 64 35 12 › E-mail: info.polska@emtest.de

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release.
Technical data subject to change without further notice.