



N.V. Radiofabriek en Ingenieursbureau v/h
VAN DER HEEM en BLOESMA

Apparaat: **KY 157**
Onderdeel: **SCHEMA**


SCHEMA.

No. blad:
Dat: **2-7-1936.**

Gew. 3-8-36

Auteursrecht aan de Staat toebehorend.

Schakelaars in U.K.f.-stand getekend.

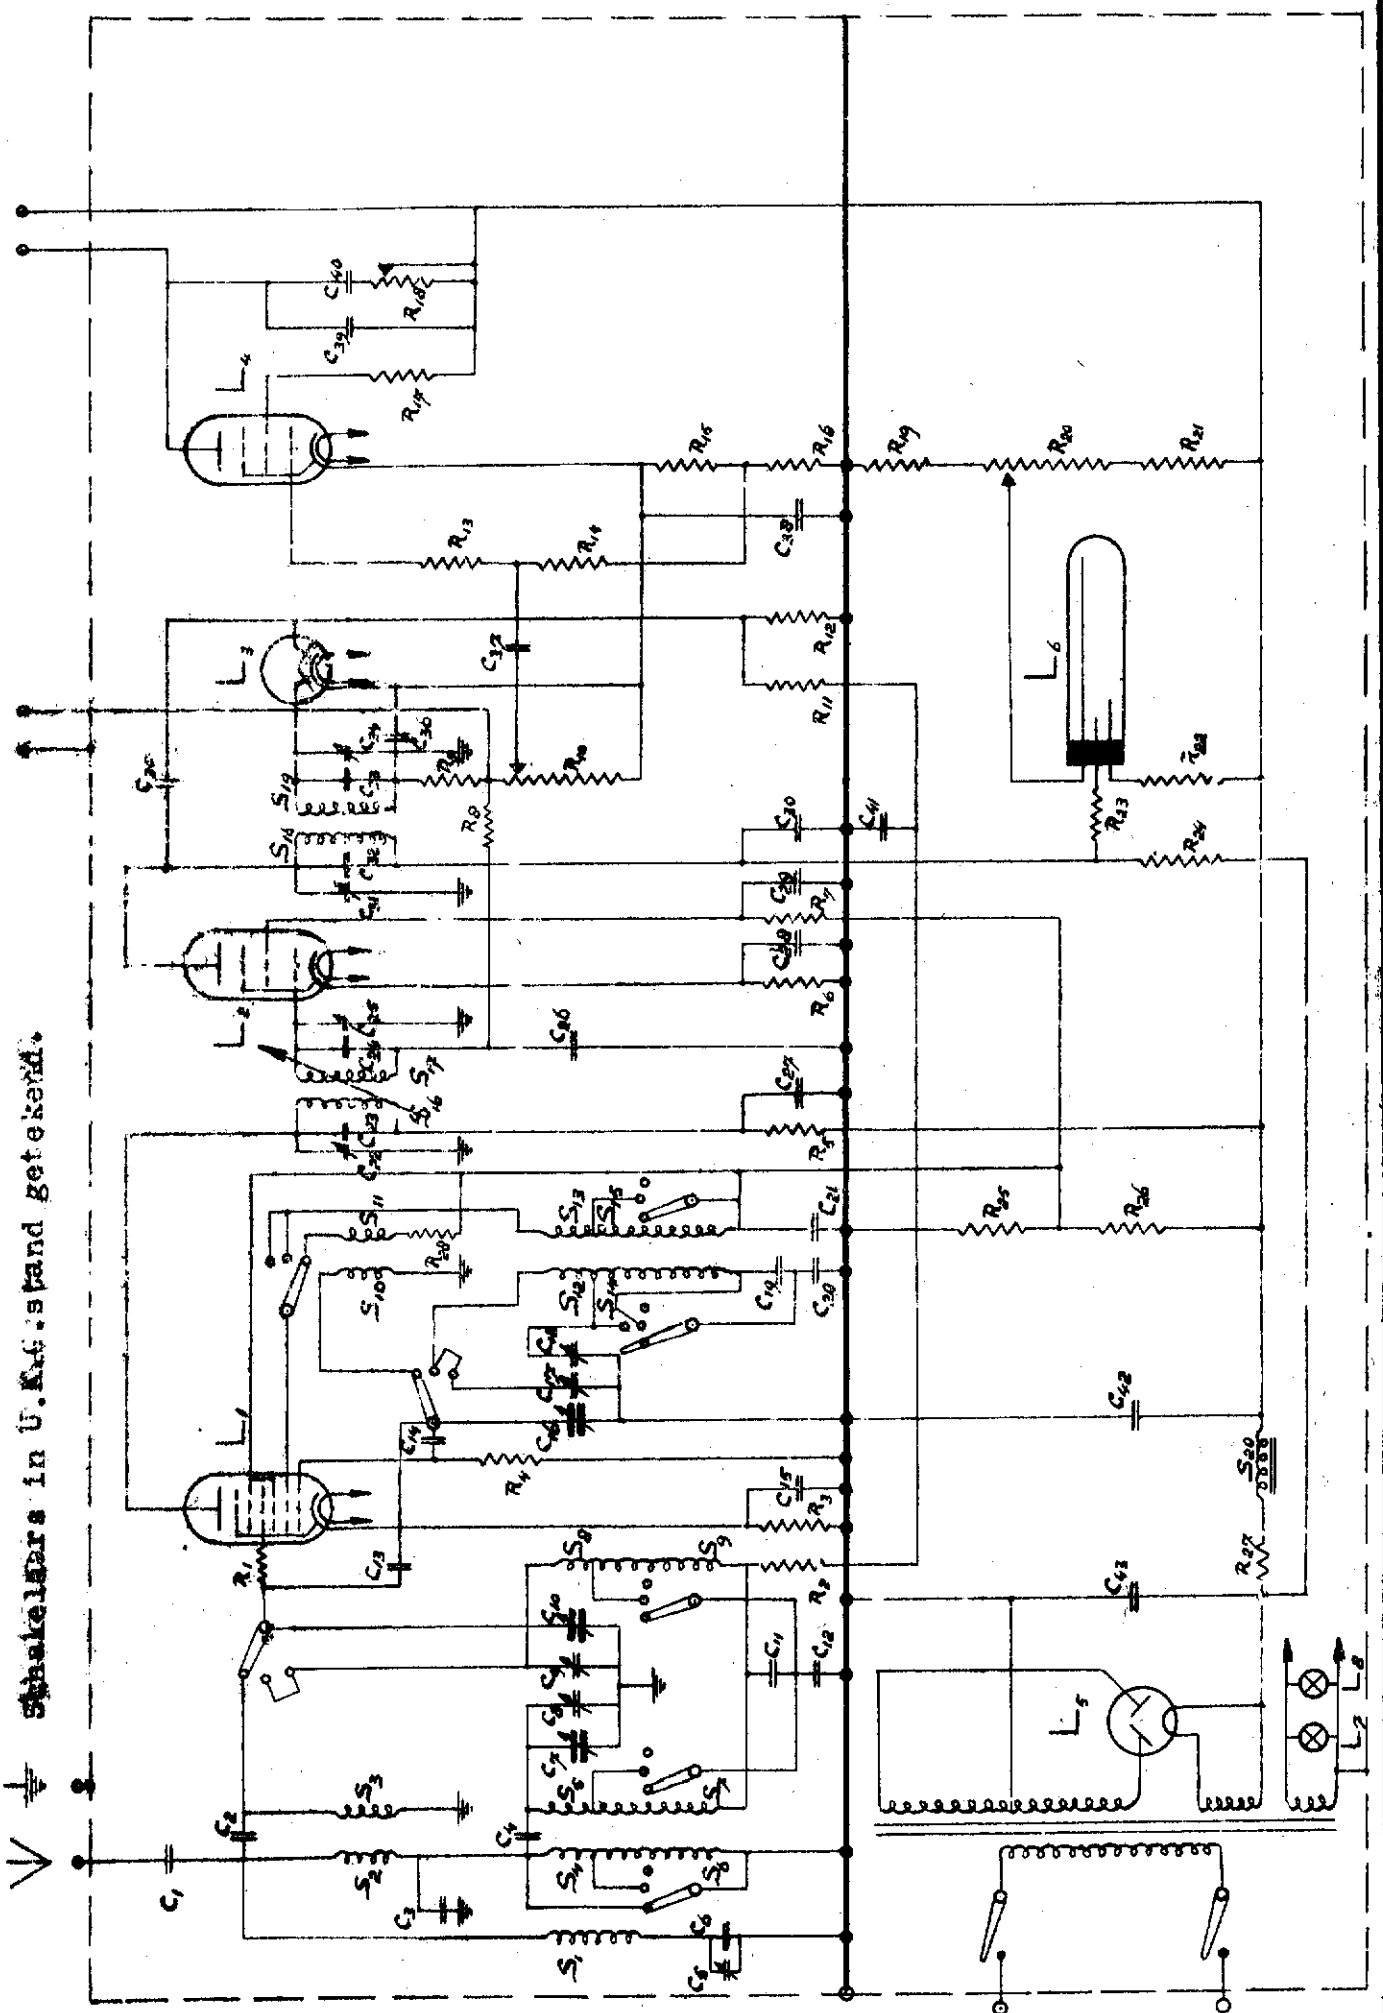



gew. 16-10-36

Auteursrecht volgens de wet voorbehouden.

Condensatoren

| <u>Q</u> | <u>Capaciteit</u> | <u>Codenummer</u> |
|----------|-------------------|-------------------|
| 1 | 10000 μ F | 28 198 990 |
| 2 | 10 " | 28 190 030 |
| 3 | 80 " | 28 192 990 |
| 4 | 10 " | |
| 5 | 27 " | 28 210 690 |
| 6 | 80 " | |
| 7 | 490 " | 28 211 421 |
| 8 | 27 " | |
| 9 | 27 " | |
| 10 | 490 " | |
| 11 | 50000 " | 28 199 060 |
| 12 | 25000 " | 030 |
| 13 | 2 " | 28 205 880 |
| 14 | 500 " | 28 190 200 |
| 15 | 50000 " | |
| 16 | 490 " | |
| 17 | 27 " | |
| 18 | 27 " | |
| 19 | 1000 " | 28 193 000 |
| 20 | 2010 " | 010 |
| 21 | 50000 " | |
| 22 | 27 " | |
| 23 | 80 " | |
| 24 | 80 " | |
| 25 | 27 " | |
| 26 | 50000 " | |
| 27 | 50000 " | |
| 28 | 0,1 μ F | 28 199 090 |
| 29 | 0,1 " | |
| 30 | 50000 μ F | |
| 31 | 27 " | |
| 32 | 80 " | |
| 33 | 80 " | |
| 34 | 27 " | |
| 35 | 10 " | |
| 36 | 100 " | 28 190 130 |
| 37 | 10000 " | |
| 38 | 25 " | |
| 39 | 2000 " | 28 198 920 |
| 40 | 10000 " | |
| 41 | 50000 " | |
| 42 | 16 " | |
| 43 | 16 " | |
| 44 | | |

Weerstanden

| <u>R</u> | <u>Weerstand</u> | <u>Codenummer</u> |
|----------|------------------|-------------------|
| 1 | 20 Ω | GK 770 41 |
| 2 | 0,2 M Ω | 28 770 480 |
| 3 | 250 Ω | 190 |
| 4 | 50000 " | 420 |
| 5 | 10000 " | 350 |
| 6 | 2000 " | 280 |
| 7 | 1000 " | 250 |
| 8 | 2 M Ω | 580 |
| 9 | 0,1 " | |
| 10 | 0,5 " | pot. meter log. |
| 11 | 1 " | 28 770 550 |
| 12 | 0,5 " | |
| 13 | 0,1 " | |
| 14 | 1,6 " | |
| 15 | 160 Ω | 28 770 170 |
| 16 | 160 " | |
| 17 | 32 " | 100 |
| 18 | 50000 " | pot. meter |
| 19 | 20000 " | 28 770 380 |
| 20 | 20000 " | pot. meter |
| 21 | 80000 " | 1 Watt |
| 22 | 2 M Ω | 28 770 580 |
| 23 | 1000 Ω | |
| 24 | 32000 " | 28 771 050 1 W |
| 25 | 2x50000 " | 070 1 W |
| 26 | 3x50000 " | 070 1 W |
| 27 | 5x 5000 " | 28 770 970 1W |
| 28 | 100 " | 28 770 150 0,5W |

Spoelen

| <u>S</u> | <u>windingen</u> | <u>codenummer</u> |
|----------|------------------|-------------------|
| 1 | 930 | GK 561 05 |
| 2 | 30 | } GK 561 08 |
| 3 | 10,5 | |
| 4 | 170 | |
| 5 | 180 | } GK 561 02 |
| 6 | 550 | |
| 7 | 350 | |
| 8 | 176 | } GK 561 03 |
| 9 | 350 | |
| 10 | 13 | } GK 561 09 |
| 11 | 6 | |
| 12 | 84 | } GK 561 04 |
| 13 | 20 | |
| 14 | 244 | |
| 15 | 84 | |
| 16 | 1070 | } GK 561 06 |
| 17 | 1070 | |
| 18 | 1070 | } GK 561 07 |
| 19 | 1050 | |
| 20 | 3000 | 28 546 081 |

LAMPEN.

- 1 = AK 2
- 2 = AF 3
- 3 = AB 2
- 4 = AL 4
- 5 = AZ 1

Transformator GK 510 29