# EXTECH Product DATASHEET

## MiniTec<sup>™</sup> Manual Ranging Digital MultiMeter


Rugged pocket design, 8 functions

### Features:

- Large 2000 count LCD display
- Measures AC/DC Voltage, AC/DC Current and Resistance
- 1.5V and 9V Battery tests under load
- Continuity beeper, Diode test
- 10A fuse protection
- Overload protection and indication
- Includes protective rubber holster, 9V battery and test leads

$(\epsilon)$	(UL)	CAT II - 600V
	LISTED	

Specifications	Ranges	Max Resolution	Basic Accuracy (%rdg+digits)	
DC Voltage:	200mV, 2000mV, 20V, 200V, 600V	0.1mV	±(0.5% + 2d)	
AC Voltage:	200V, 600V	0.1V	±(1.5% + 5d)	
DC Current:	200mA, 10A	0.1mA	±(1.2% + 2d)	
AC Current:	200mA, 10A	0.1mA	±(1.8% + 5d)	
Resistance (Ω):	200, 2000, 20k, 200k, 2000k	0.1Ω	±(0.8% + 2d)	
Continuity:	<30 ohms			
Diode Test:	yes			
Battery Test:	9V	10mV	±(1.0% + 2d)	
	1.5V	10mV	±(1.0% + 2d)	
Power:	one 9V battery			
Dimensions:	4.8 x 2.4 x 1.6" (122 x 61 x 40mm)			
Weight:	9.17oz (260g)			

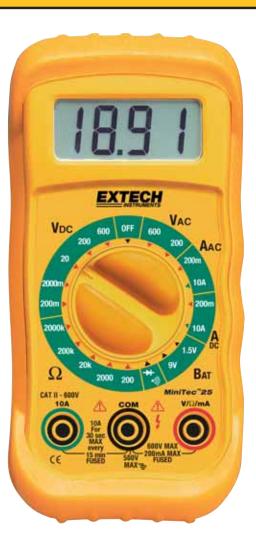

#### **Ordering Information**:

MN25......Manual Ranging MiniTec™ MN25-NIST.....Manual Ranging MiniTec™ with NIST Certificate 409992 ......Vinyl pouch carrying case



EXTECH INSTRUMENTS CORPORATION 285 Bear Hill Road, Waltham, MA 02451-1064, U.S.A. Phone: 781-890-7440 • Fax: 781-890-7864 ISO 9001:2000 CERTIFIED

#### Make mine an Extech! www.<u>extech.com</u>

04/04/05 · R2

Copyright © 2004 Extech Instruments Corporation. All rights reserved including the right of reproduction in whole or in part in any form