


AVR 7300 REAR-PANEL AUDIO CONNECTIONS

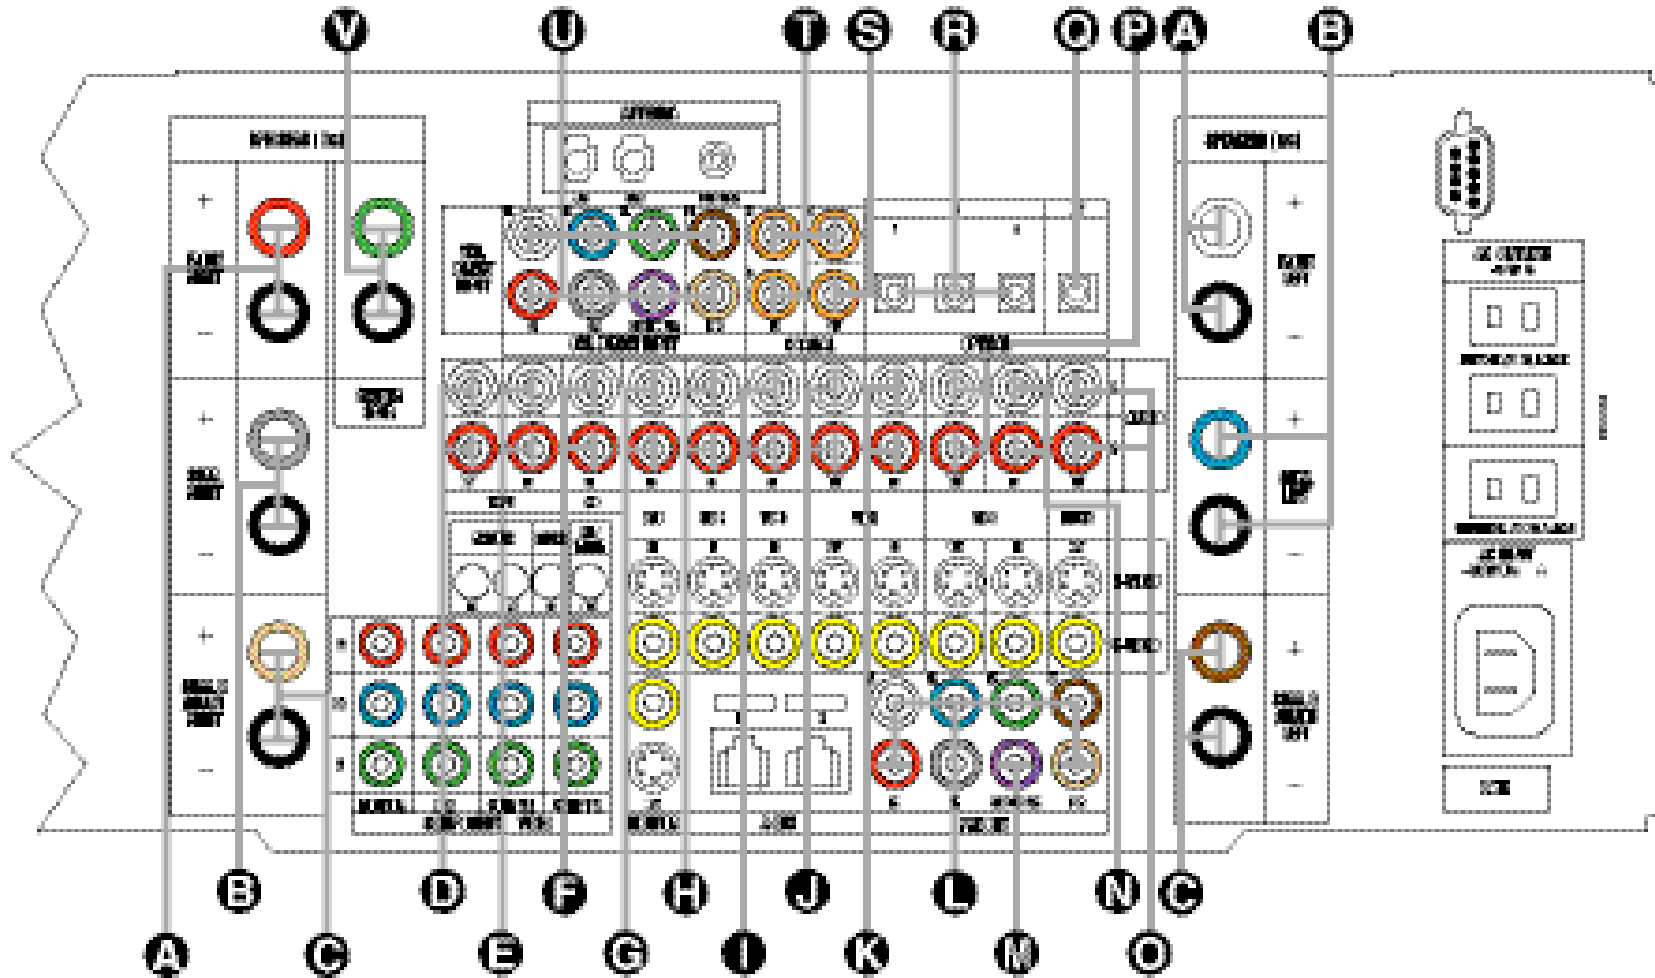

- | | | |
|--|----------------------------------|--|
| A Front Speaker Outputs | I Video 3 Audio Inputs | Q Optical Digital Audio Output |
| B Surround Speaker Outputs | J Video 2 Audio Outputs | R Optical Digital Audio Inputs |
| C Surround Back/Multiroom Speaker Outputs | K Video 2 Audio Inputs | S Coaxial Digital Audio Output |
| D Tape Outputs | L Preamp Outputs | T Coaxial Digital Audio Inputs |
| E Tape Inputs | M Subwoofer Output | U 8-Channel Direct Audio Inputs |
| F CD Inputs | N Video 1 Audio Inputs | V Center Speaker Output |
| G DVD Audio Inputs | O Multiroom Audio Outputs | |
| H Video 4 Audio Inputs | P Video 1 Audio Outputs | |

NOTE: To assist in making the correct connections for multichannel input, output and speaker connections, all connection jacks and terminals are color-coded in conformance with the latest CEA standards as follows:

Front Left: White	Subwoofer: Purple
Front Right: Red	Digital Audio: Orange
Center: Green	Composite Video: Yellow
Surround Left: Blue	Component Video "Y": Green
Surround Right: Gray	Component Video "Pr": Red
Surround Back Left: Brown	Component Video "Pb": Blue
Surround Back Right: Tan	