



350 Series Digital Multimeters

- Easy-to-use multimeters for residential, commercial and light industrial environments
- Audible and visual non-contact voltage indicator
- Measures AC/DC voltage, resistance and continuity
- Large numbers and symbols for easy reading
- Cat III-600V safety rating



Each multimeter has a convenient non-contact voltage indicator.





350 Series Digital Multimeters

IDEAL 350 Series Digital Multimeters are versatile workhorses that every electrician should own. Easy to use and loaded with features, the 350 Series is perfect for residential, commercial and light industrial uses. Plus, these feature-packed multimeters are priced so that everyone can carry one.

350 Series Common Features:

- ▶ Auto/manual ranging
- ▶ Non-contact voltage 80-600VAC
- ▶ Measures AC/DC voltage
- ▶ Resistance
- ▶ Audible continuity
- ▶ Data hold
- ▶ Diode test
- ▶ Low battery indication
- ▶ Auto power off
- ▶ Large numbers and symbols
- ▶ Electronic overload protection on all ranges
- ▶ Rubber boot
- ▶ Cat-III-600V
- ▶ Lifetime limited warranty



▶ 61-350



▶ 61-352 features:

- ▶ Measures AC/DC current
- ▶ Max/min
- ▶ Frequency
- ▶ Capacitance



▶ 61-354 features:


- ▶ Measures AC/DC current
- ▶ Max/min
- ▶ Frequency
- ▶ Capacitance
- ▶ True RMS

350 Series Specifications

	61-350	61-352	61-354	ACCURACY
	RANGE & RESOLUTION	RANGE & RESOLUTION	RANGE & RESOLUTION	
AC VOLTAGE	200m/2/20/200/750 VAC	200m/2/20/200/750 VAC	200m/2/20/200/750 VAC	1.5%
DC VOLTAGE	200m/2/20/200/1000 VDC	200m/2/20/200/1000 VDC	200m/2/20/200/1000 VDC	0.5%
AC/DC CURRENT	—	2.000A/10.00 A	2.000A/10.00 A	1.5%
RESISTANCE	200/2k/20k/200k/2M/20M Ω	200/2k/20k/200k/2M/20M Ω	200/2k/20k/200k/2M/20M Ω	0.7%
CAPACITANCE	—	2n-200μ/2.000m F	2n-200μ/2.000m F	2.0%
FREQUENCY	—	2k/20k/200k/2M/20M Hz	2k/20k/200k/2M/20M Hz	0.01%

Optional Accessories

C-290	Carrying Case
61-451	300AAC Clamp Adapter
61-334	600A AC/DC Clamp Adapter

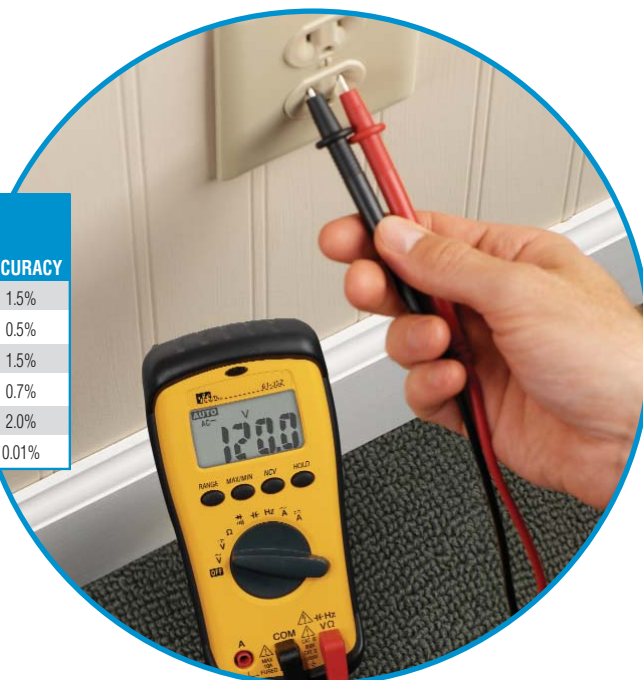

IDEAL INDUSTRIES, INC. • Technical Hotline / toll-free 877-201-9005
 Becker Place, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA
 33 Fuller Road, Ajax, Ontario L1S 2E1, Canada / 905-683-3400 • 800-527-9105 in Canada
 Level 6, 75-85 Elizabeth Street, Sydney NSW 2000 Australia / 61300 765 800 • 61405 123 100 (mobile)
 225 Europa Boulevard, Gemini Business Park, Warrington, Cheshire, WA5 7TN, UK / +44-(0) 1925 444446
 Gutenbergstrasse 10, 85737 Ismaning, Germany / +49-(0) 89 996860
 Unit 911, Tower W1, The Towers, Oriental Plaza, No. 1 East Chang An Avenue, Dong Cheng District
 Beijing, 100738, China / 86-10-8518-3141 • 86-10-8518-3142
 Shanghai Representative Office, Room 1401, Financial Square Building, 333 Jiujiang Road
 Shanghai, China 200001 / 86-21-6360-7045
 Av. Major Sylvio de M. Padilha, 5200 – 201/F, São Paulo – SP, 05677-000 – Brazil / +55-11-3759-8777
 Parque Intermex, Periferico Sur 7999 A Tlaquepaque, Jalisco, Mexico, c.p. 45601 /
 52-33-37702320 • 52-33-3809721 (mobile)
 Trend Communications India Private Limited C-207, Twin Arcade, Military Rd.
 Marol, Andheri (East), Mumbai 400059, India, Tele + 91 222 852 1059, Fax + + 91 222 8596155
www.idealindustries.com • www.testersandmeters.com

The 61-352 and 61-354 models can test for current, frequency and capacitance.



Test & Measurement

Innovation with a Purpose.