
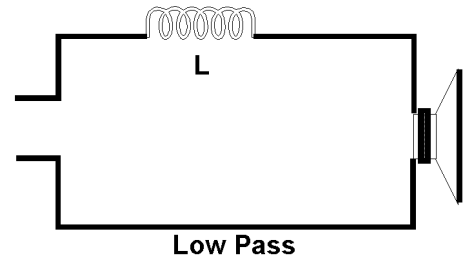


## High and Low 6 and 12 dB/Octive Pass Passive Crossovers


### 6dB/Octive

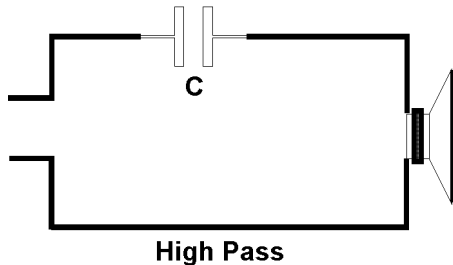


FREQ. HERTZ	2 OHMS		4 OHMS		8 OHMS	
	L (mH)	C (μF)	L (mH)	C (μF)	L (mH)	C (μF)
40	7.962	1987.5	15.924	993.75	31.847	496.875
60	5.308	1325	10.616	662.5	21.231	331.25
80	3.981	993.75	7.962	496.875	15.924	248.437
100	3.185	795	6.369	397.5	12.739	198.75
130	2.45	611.538	4.9	305.769	9.799	152.885
200	1.592	397.5	3.185	198.75	6.369	99.375
280	1.137	283.929	2.275	141.964	4.55	70.982
400	.796	198.75	1.592	99.375	3.185	49.688
600	.531	132.5	1.062	66.25	2.123	33.125
800	.398	99.375	.796	49.688	1.592	24.844
1000	.318	79.5	.637	39.75	1.274	19.875
1200	.265	66.25	.531	33.125	1.062	16.562
1800	.177	44.167	.354	22.083	.708	11.042
4000	.080	19.875	.159	9.937	.318	4.969
6000	.053	13.25	.106	6.625	.212	3.312
9000	.035	8.833	.071	4.417	.142	2.208
12000	.027	6.625	.053	3.312	.106	1.656

## High and Low 6 and 12 dB/Octive Pass Passive Crossovers

### 12 dB/Octive



High Pass



Low Pass

FREQ. HERTZ	2 OHMS		4 OHMS		8 OHMS	
	L (mH)	C (μF)	L (mH)	C (μF)	L (mH)	C (μF)
40	11.255	1406.25	22.51	703.125	45.02	351.562
60	7.503	937.5	15.007	468.75	30.013	234.375
80	5.628	703.125	11.255	351.562	22.51	175.781
100	4.502	562.5	9.004	281.25	18.008	140.625
130	3.463	432.692	6.926	216.346	13.852	108.173
200	2.251	281.25	4.502	140.625	9.004	70.312
280	1.608	200.893	3.216	100.446	6.431	50.223
400	1.126	140.625	2.251	70.312	4.502	35.156
600	.750	93.75	1.5	46.875	3.001	23.438
800	.563	70.312	1.126	35.156	2.251	17.578
1000	.450	56.25	.900	28.125	1.801	14.062
1200	.375	46.875	.750	23.438	1.501	11.719
1800	.250	31.25	.500	15.625	1.000	7.812
4000	.113	14.062	.225	7.031	.450	3.516
6000	.075	9.375	.150	4.688	.300	2.344
9000	.050	6.25	.100	3.125	.200	1.562
12000	.038	4.688	.075	2.344	.150	1.172