


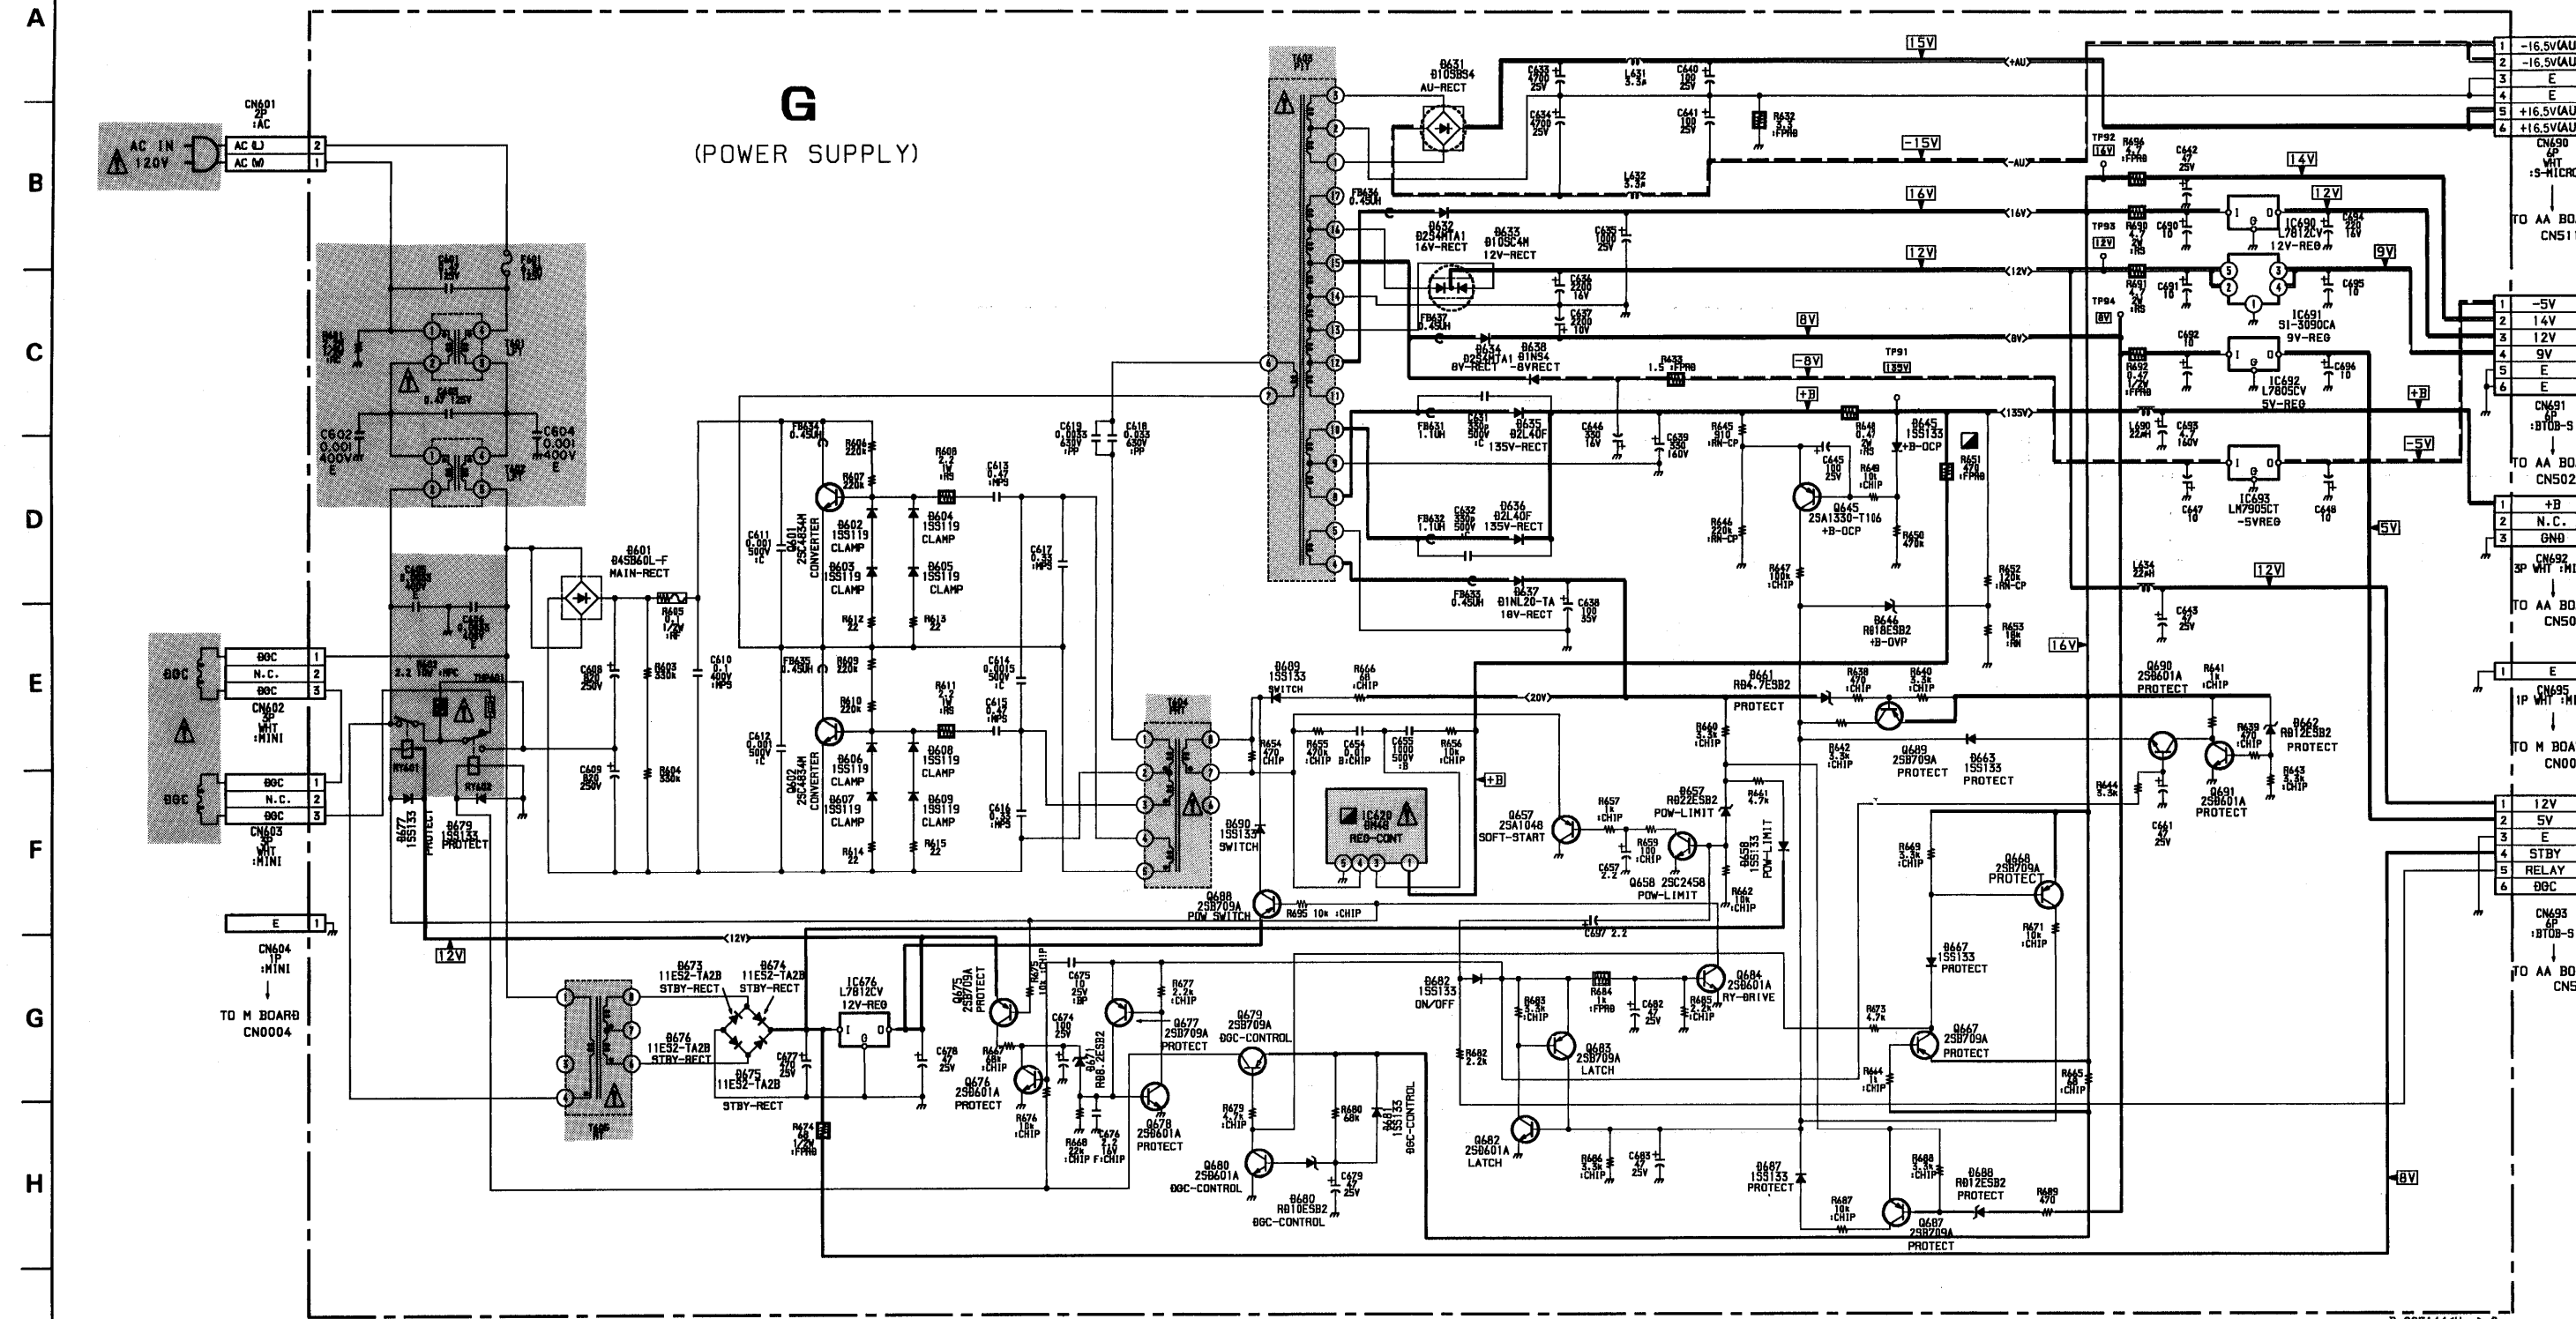

G BOARD IC VOLTAGE LIST

IC602	1	2	3	4	5
IC601	IN 16.7	OUT 12.0			
IC602	IN 14.8	OUT 11.9			
IC603	1	2	3	4	5
IC604	IN 7.3	OUT 5.1			
IC605	IN -7.7	OUT -5.1			

All voltages are in V.

G BOARD TRANSISTOR VOLTAGE LIST

	E	C	B
Q601	0.6	136	-1.0
Q602	-136	0.6	-137
Q603	136	0	136
Q604	10.7	GND	10.9
Q605	GND	10.9	0
Q606	16.3	16.3	16.6
Q607	16.3	0	16.3
Q608	13.4	13.3	12.6
Q609	GND	0	0.8
Q610	GND	1.6	0
Q611	1.6	0	1.6
Q612	GND	0.2	0.8
Q613	15.6	-2.3	15.6
Q614	12.0	12.0	11.3
Q615	16.3	0	16.3
Q616	0	0	0.7
Q617	GND	0	0.8

All voltages are in V.

C BOARD IC VOLTAGE LIST

IC701	1	2	3	4	5	6	7	8	9	10
IC701	3.7	3.5	6.3	153	152					
IC702	3.7	3.6	7.1	155	154					
IC703	3.7	3.6	3.5	153	151					



All voltages are in V.

C BOARD TRANSISTOR VOLTAGE LIST

	E	C	B
Q701	3.9	0.2	3.5

All voltages are in V.

C BOARD IC701, 702, 703 TDA6101Q/N3

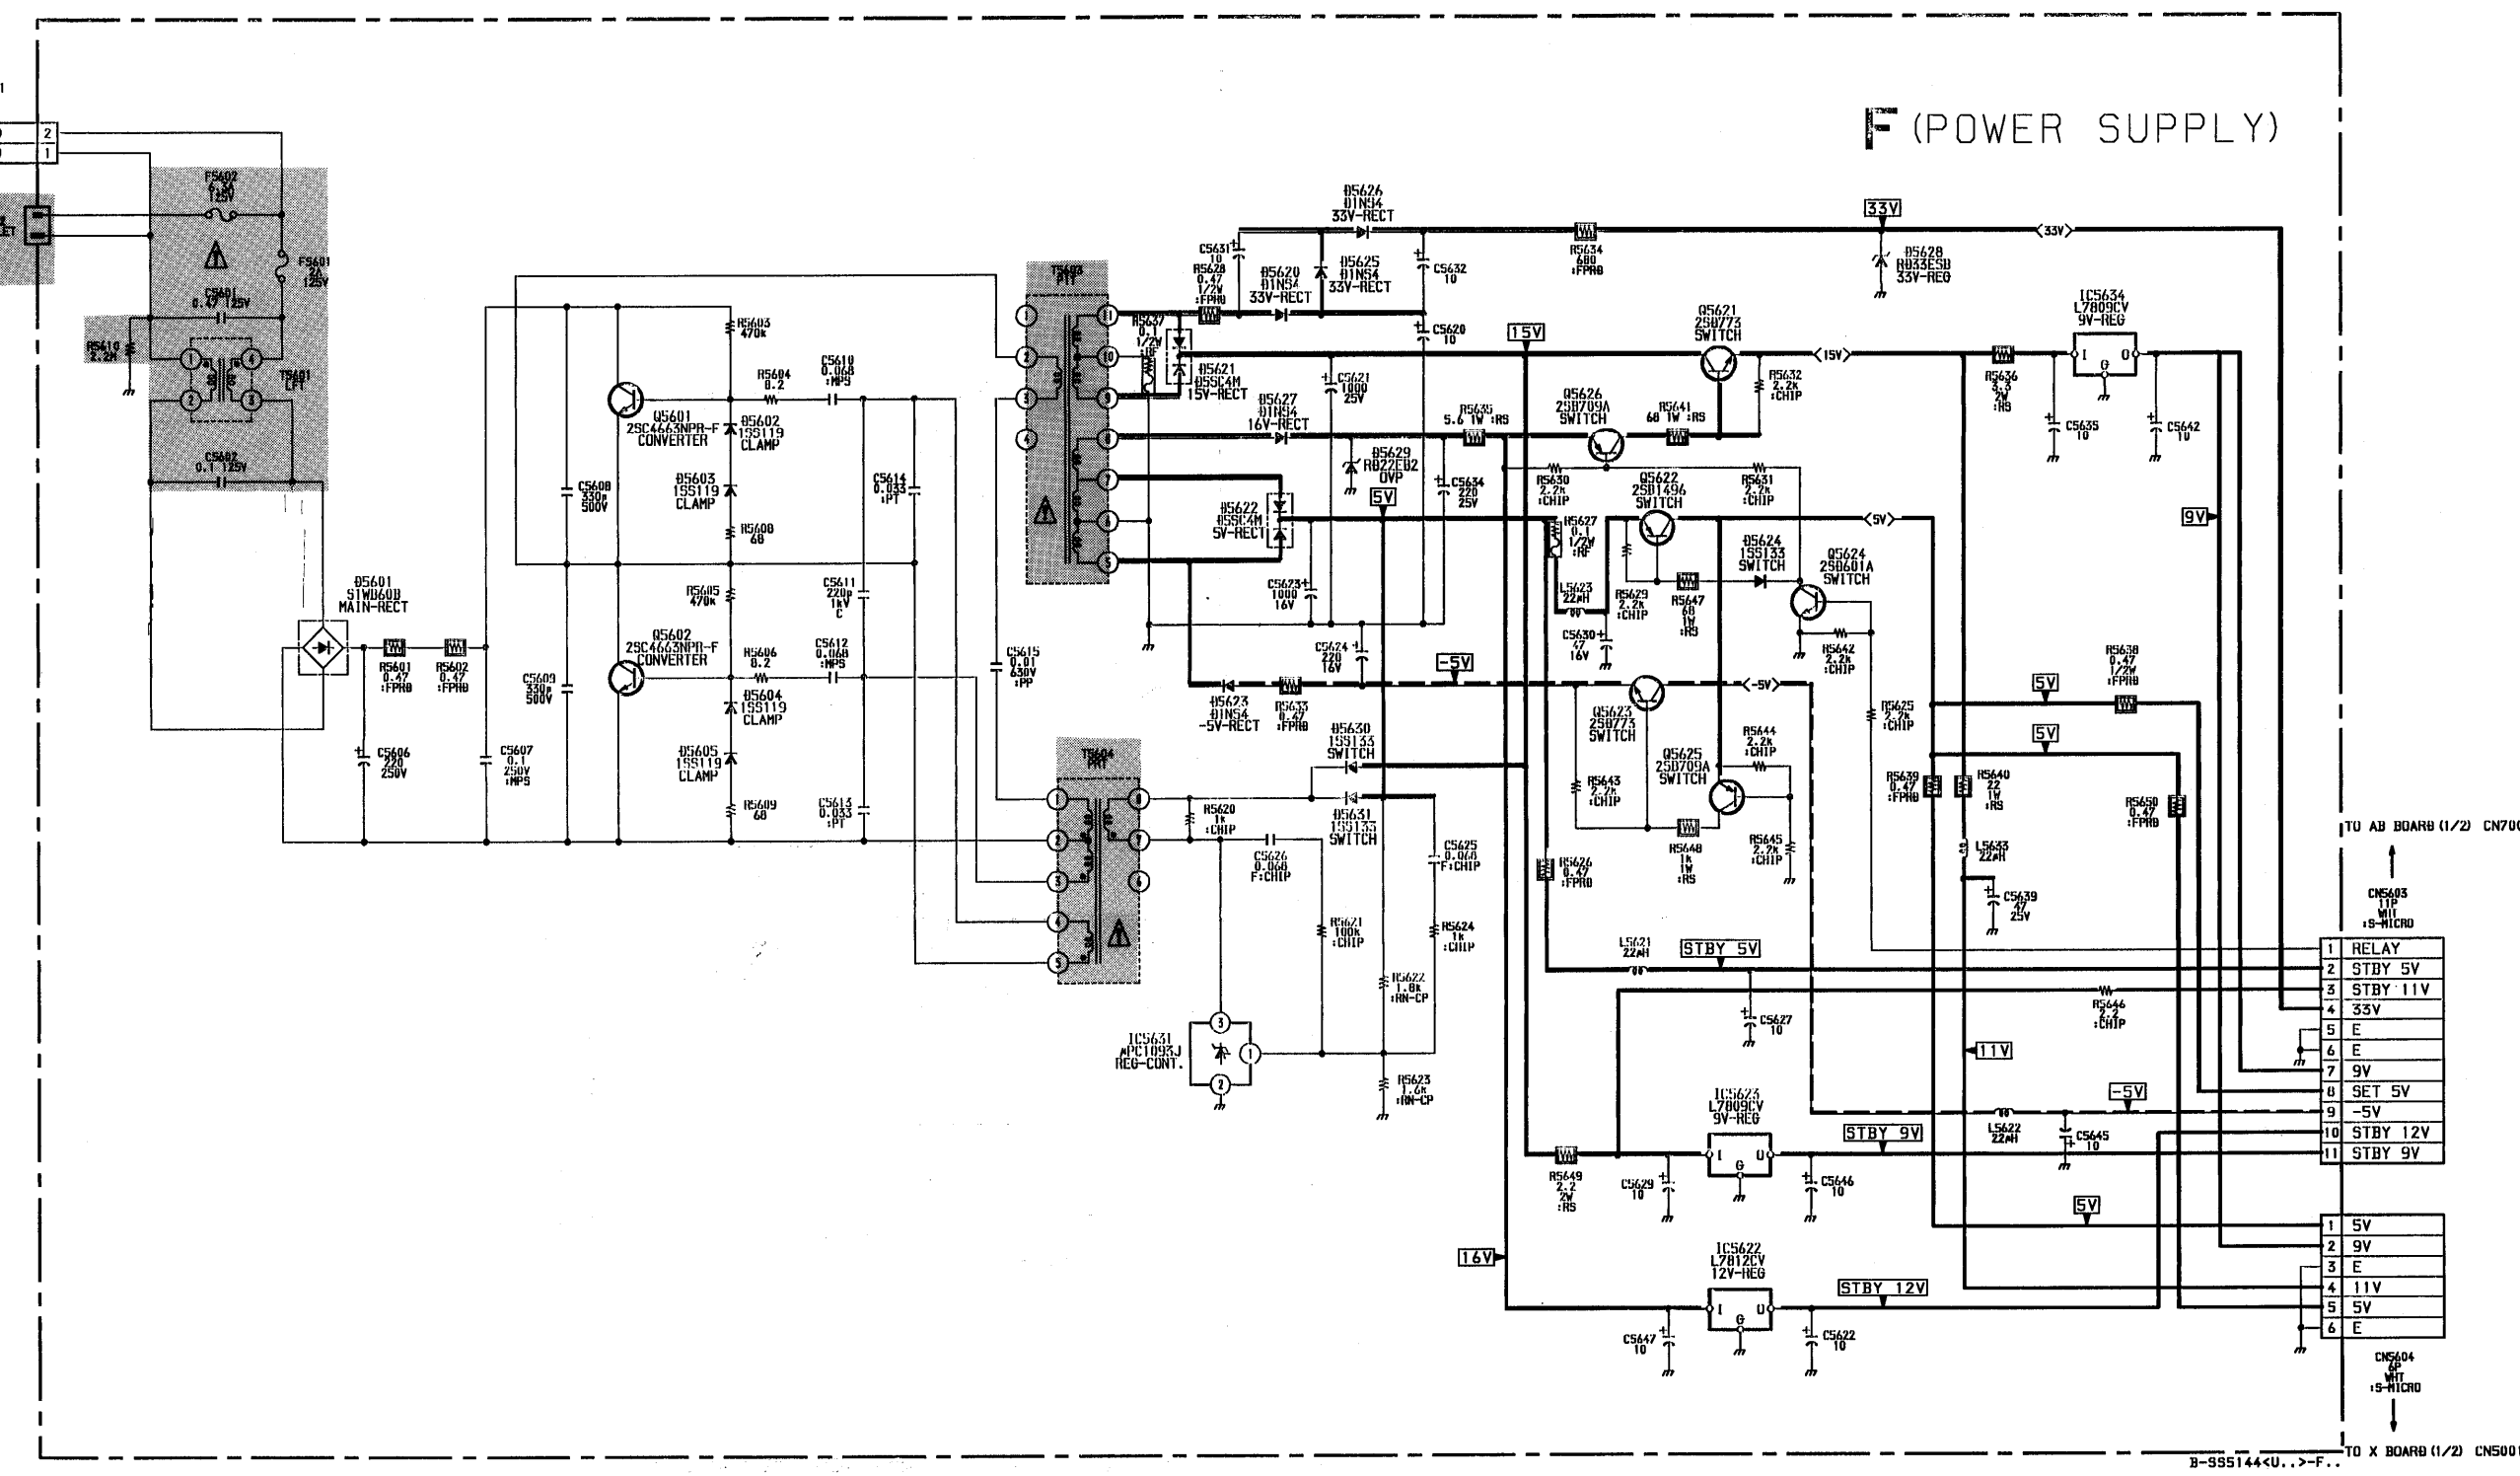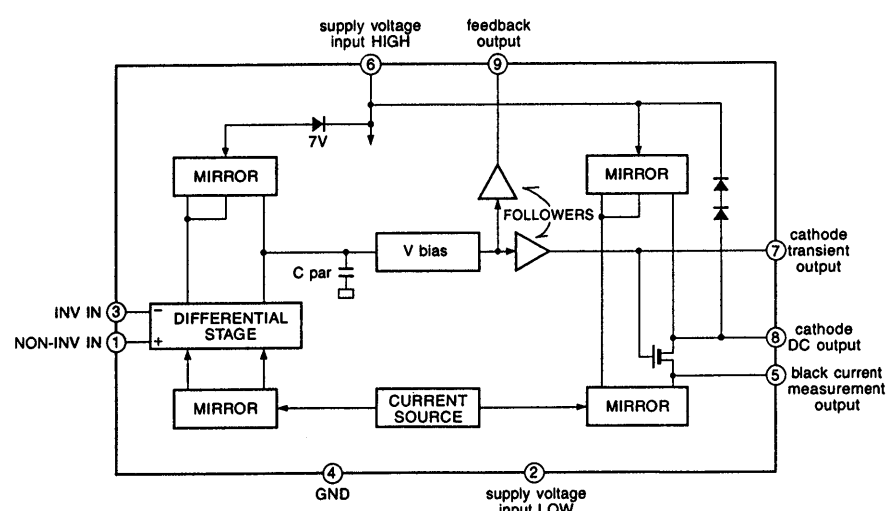

F BOARD IC VOLTAGE LIST

IC5622	IN	OUT
IC5622	16.4	12.3
IC5623	12.3	9.3
IC5624	2.7	GND
IC5625	12.6	9.4

All voltages are in V.

F BOARD TRANSISTOR VOLTAGE LIST

	E	C	B
Q5601	-2.3	55.7	-4.0
Q5602	-56.2	-2.3	-57.2
Q5603	13.4	13.4	14.2
Q5604	5.5	5.4	4.6
Q5605	-5.4	-5.3	-4.6
Q5606	GND	0.2	0.9
Q5607	5.4	5.3	4.6
Q5608	16.4	16.3	15.6

All voltages are in V.

