

REPLACEABLE ELECTRICAL PARTS

PARTS ORDERING INFORMATION

Replacement parts are available from or through your local Tektronix, Inc. Field Office or representative.

Changes to Tektronix instruments are sometimes made to accommodate improved components as they become available, and to give you the benefit of the latest circuit improvements developed in our engineering department. It is therefore important, when ordering parts, to include the following information in your order: Part number, instrument type or number, serial number, and modification number if applicable.

If a part you have ordered has been replaced with a new or improved part, your local Tektronix, Inc. Field Office or representative will contact you concerning any change in part number.

Change information, if any, is located at the rear of this manual.

Only the circuit number will appear on the diagrams and circuit board illustrations. Each diagram and circuit board illustration is clearly marked with the assembly number. Assembly numbers are also marked on the mechanical exploded views located in the Mechanical Parts List. The component number is obtained by adding the assembly number prefix to the circuit number.

The Electrical Parts List is divided and arranged by assemblies in numerical sequence (e.g., assembly A1 with its subassemblies and parts, precedes assembly A2 with its subassemblies and parts).

Chassis-mounted parts have no assembly number prefix and are located at the end of the Electrical Parts List.

LIST OF ASSEMBLIES

A list of assemblies can be found at the beginning of the Electrical Parts List. The assemblies are listed in numerical order. When the complete component number of a part is known, this list will identify the assembly in which the part is located.

TEKTRONIX PART NO. (column two of the Electrical Parts List)

Indicates part number to be used when ordering replacement part from Tektronix.

CROSS INDEX-MFR. CODE NUMBER TO MANUFACTURER

The Mfr. Code Number to Manufacturer index for the Electrical Parts List is located immediately after this page. The Cross Index provides codes, names and addresses of manufacturers of components listed in the Electrical Parts List.

SERIAL/MODEL NO. (columns three and four of the Electrical Parts List)


Column three (3) indicates the serial number at which the part was first used. Column four (4) indicates the serial number at which the part was removed. No serial number entered indicates part is good for all serial numbers.

ABBREVIATIONS


Abbreviations conform to American National Standard Y1.1.

COMPONENT NUMBER (column one of the Electrical Parts List)

A numbering method has been used to identify assemblies, subassemblies and parts. Examples of this numbering method and typical expansions are illustrated by the following:



Read: Resistor 1234 of Assembly 23

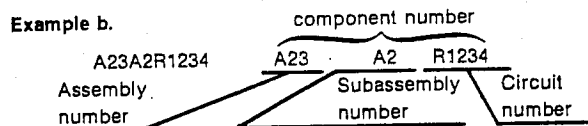

Read: Resistor 1234 of Subassembly 2 of Assembly 23

NAME & DESCRIPTION (column five of the Electrical Parts List)

In the Parts List, an Item Name is separated from the description by a colon (:). Because of space limitations, an Item Name may sometimes appear as incomplete. For further Item Name identification, the U.S. Federal Cataloging Handbook H6-1 can be utilized where possible.

MFR. CODE (column six of the Electrical Parts List)

Indicates the code number of the actual manufacturer of the part. (Code to name and address cross reference can be found immediately after this page.)

MFR. PART NUMBER (column seven of the Electrical Parts List)

Indicates actual manufacturers part number.

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
00213	NYTRONICS COMPONENTS GROUP INC SUBSIDIARY OF NYTRONICS INC	ORANGE ST	DARLINGTON SC 29532
00779	AMP INC	2800 FULLING MILL PO BOX 3608	HARRISBURG PA 17105
00853	SANGAMO WESTON INC COMPONENTS DIV	SANGAMO RD PO BOX 128	PICKENS SC 29671-9716
01121	ALLEN-BRADLEY CO	1201 S 2ND ST	MILWAUKEE WI 53204-2410
01281	MOTOROLA INC RF & OPTOELECTRONIC PRODUCTS DIV	14520 AVIATION BLVD	LAWDALE CA 90260-1121
01295	TEXAS INSTRUMENTS INC SEMICONDUCTOR GROUP	13500 N CENTRAL EXPY PO BOX 655012	DALLAS TX 75265
01537	MOTOROLA COMMUNICATIONS AND ELECTRONICS INC	2553 N EDGINGTON ST	FRANKLIN PARK IL 60131-3401
02113	COILCRAFT INC	1102 SILVER LAKE RD	CARY IL 60013-1658
02735	RCA CORP SOLID STATE DIVISION.	ROUTE 202	SOMERVILLE NJ 08876
03508	GENERAL ELECTRIC CO SEMI-CONDUCTOR PRODUCTS DEPT	W GENESEE ST	AUBURN NY 13021
03888	PYROFILM DIV DIV OF KDI ELECTRONICS INC	60 S JEFFERSON RD	WHIPPANY NJ 07981-1001
04222	AVX CERAMICS DIV OF AVX CORP	19TH AVE SOUTH P O BOX 867	MYRTLE BEACH SC 29577
04713	MOTOROLA INC SEMICONDUCTOR PRODUCTS SECTOR	5005 E MCDOWELL RD	PHOENIX AZ 85008-4229
05292	ITT COMPONENTS DIV		CLIFTON NJ
05397	UNION CARBIDE CORP MATERIALS SYSTEMS DIV	11901 MADISON AVE	CLEVELAND OH 44101
05828	GENERAL INSTRUMENT CORP GOVERNMENT SYSTEMS DIV	600 W JOHN ST	HICKSVILLE NY 11802
06665	PRECISION MONOLITHICS INC SUB OF BOURNS INC	1500 SPACE PARK DR	SANTA CLARA CA 95050
07263	FAIRCHILD SEMICONDUCTOR CORP NORTH AMERICAN SALES SUB OF SCHLUMBERGER LTD MS 118	10400 RIDGEVIEW CT	CUPERTINO CA 95014
07716	TRW INC TRW IRC FIXED RESISTORS/BURLINGTON	2850 MT PLEASANT AVE	BURLINGTON IA 52601
09922	BURNDY CORP	RICHARDS AVE	NORWALK CT 06852
11236	CTS CORP BERNE DIV THICK FILM PRODUCTS GROUP	406 PARR ROAD	BERNE IN 46711-9506
12697	CLAROSTAT MFG CO INC	LOWER WASHINGTON ST	DOVER NH 03820
12954	MICROSEMI CORP - SCOTTSDALE	8700 E THOMAS RD P O BOX 1390	SCOTTSDALE AZ 85252
12969	UNITRODE CORP	5 FORBES RD	LEXINGTON MA 02173-7305
13511	AMPHENOL CADRE DIV BUNKER RAMO CORP		LOS GATOS CA
14298	INSILCO CORP ACIC DIV	PAMLICO BLDG SUITE 209 3306 EAST CHAPEL HILL NELSON HWY	RESEARCH TRIANGLE PARK NC 27709
14433	ITT SEMICONDUCTORS DIV		WEST PALM BEACH FL
14552	MICROSEMI CORP	2830 S FAIRVIEW ST	SANTA ANA CA 92704-5948
15454	AMETEK INC RODAN DIV	721 N POPLAR ST	ORANGE CA 92668
17856	SILICONIX INC	2201 LAURELWOOD RD	SANTA CLARA CA 95054-1516
18324	SIGNETICS CORP MILITARY PRODUCTS DIV	4130 S MARKET COURT	SACRAMENTO CA 95834-1222
19613	MINNESOTA MINING AND MFG CO TEXTTOOL PRODUCTS DEPT ELECTRONIC PRODUCT DIV	1410 E PIONEER DR	IRVING TX 75061-7847
19701	MEPCO/CENTRALAB A NORTH AMERICAN PHILIPS CO MINERAL WELLS AIRPORT	PO BOX 760	MINERAL WELLS TX 76067-0760
20932	KYOCERA INTERNATIONAL INC	11620 SORRENTO VALLEY RD PO BOX 81543 PLANT NO 1	SAN DIEGO CA 92121
22526	DU PONT E I DE NEMOURS AND CO INC DU PONT CONNECTOR SYSTEMS DIV MILITARY PRODUCTS GROUP	515 FISHING CREEK RD	NEW CUMBERLAND PA 17070-3007

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
24355	ANALOG DEVICES INC	RT 1 INDUSTRIAL PK PO BOX 9106	NORWOOD MA 02062
24546	CORNING GLASS WORKS	550 HIGH ST	BRADFORD PA 16701-3737
25088	SIEMENS CORP	186 WOOD AVE S	ISELIN NJ 08830-2704
27014	NATIONAL SEMICONDUCTOR CORP	2900 SEMICONDUCTOR DR	SANTA CLARA CA 95051-0606
31918	ITT SCHADOW INC	8081 WALLACE RD	EDEN PRAIRIE MN 55344-2224
32159	WEST-CAP ARIZONA SUB OF SFE TECHNOLOGIES	2201 E ELVIRA ROAD	TUCSON AZ 85706-7026
32997	BOURNS INC TRIMPOT DIV	1200 COLUMBIA AVE	RIVERSIDE CA 92507-2114
34335	ADVANCED MICRO DEVICES	901 THOMPSON PL	SUNNYVALE CA 94086-4518
50101	FREQUENCY SOURCES INC SEMICONDUCTOR DIV SUB OF LORAL CORP	16 MAPLE RD	CHELMSFORD MA 01824-3737
50434	HEWLETT-PACKARD CO OPTOELECTRONICS DIV	370 W TRIMBLE RD	SAN JOSE CA 95131
51406	MURATA ERIE NORTH AMERICA INC HEADQUARTERS AND GEORGIA OPERATIONS	2200 LAKE PARK DR	SMYRNA GA 30080
51642	CENTRE ENGINEERING INC	2820 E COLLEGE AVE	STATE COLLEGE PA 16801-7515
52763	STETCO INC	3344 SCHIERHORN	FRANKLIN PARK IL 60131
52769	SPRAGUE-GOODMAN ELECTRONICS INC	134 FULTON AVE	GARDEN CITY PARK NY 11040-5352
53387	MINNESOTA MINING MFG CO 3M ELECTRONIC PRODUCTS DIV	3M CENTER	ST PAUL MN 55101-1428
54473	MATSUSHITA ELECTRIC CORP OF AMERICA	ONE PANASONIC WAY PO BOX 1501	SECAUCUS NJ 07094-2917
54583	TDK ELECTRONICS CORP	12 HARBOR PARK DR	PORT WASHINGTON NY 11550
54937	DEYOUNG MANUFACTURING INC	12920 NE 125TH WAY	KIRKLAND WA 98034-7716
55112	WESTLAKE CAPACITORS INC	5334 STERLING CENTER DRIVE	WESTLAKE VILLAGE CA 91361
55680	NICHICON /AMERICA/ CORP	927 E STATE PKY	SCHAUMBURG IL 60195-4526
56289	SPRAGUE ELECTRIC CO WORLD HEADQUARTERS	92 HAYDEN AVE	LEXINGTON MA 02173-7929
57668	ROHM CORP	8 WHATNEY PO BOX 19515	IRVINE CA 92713
58224	XENELL CORP	11 DUNBARTON RD PO BOX 4401	CHERRY HILL NJ 08003-2107
59660	TUSONIX INC	7741 N BUSINESS PARK DR PO BOX 37144	TUCSON AZ 85740-7144
59821	MEPCO/CENTRALAB A NORTH AMERICAN PHILIPS CO	7158 MERCHANT AVE	EL PASO TX 79915-1207
60211	VOLTAGE MULTIPLIERS INC	8711 W ROOSEVELT	VISALIA CA 93291-9458
61545	AMP KEYBOARD TECHNOLOGIES INC SUB OF AMP INC	76 BLANCHARD RD PO BOX 543	BURLINGTON MA 01803-5125
62786	HITACHI AMERICA LTD	1800 BERING DRIVE	SAN JOSE CA 95122
65786	CYPRESS SEMICONDUCTOR CORP	3901 N 1ST ST	SAN JOSE CA 95134-1506
71400	BUSSMANN DIV OF COOPER INDUSTRIES INC	114 OLD STATE RD PO BOX 14460	ST LOUIS MO 63178
71744	GENERAL INSTRUMENT CORP LAMP DIV/WORLD WIDE/	4433 N RAVENSWOOD AVE	CHICAGO IL 60640-5802
75042	IRC ELECTRONIC COMPONENTS PHILADELPHIA DIV	401 N BROAD ST	PHILADELPHIA PA 19108-1001
76493	TRW FIXED RESISTORS BELL INDUSTRIES INC	19070 REYES AVE PO BOX 5825	COMPTON CA 90224-5825
80009	JW MILLER DIV TEKTRONIX INC	14150 SW KARL BRAUN DR PO BOX 500	BEAVERTON OR 97077-0001
81483	INTERNATIONAL RECTIFIER	9220 SUNSET BLVD	LOS ANGELES CA 90069-3501
84411	AMERICAN SHIZUKI CORP OGALLALA OPERATIONS	301 WEST O ST	OGALLALA NE 69153-1844
91637	DALE ELECTRONICS INC	2064 12TH AVE PO BOX 609	COLUMBUS NE 68601-3632
91836	KINGS ELECTRONICS CO INC	40 MARBLEDALE ROAD	TUCKAHOE NY 10707-3420
93410	ESSEX GROUP INC CONTROLS DIV LEXINGTON PLANT	45-55 PLYMOUTH ST P O BOX 1007	LEXINGTON OH 44904
94617	BETTER COIL AND TRANSFORMER CORP	2001 W UNION	GOODLAND IN 47948
00130	LEMOSA INC	2015 SECOND ST.	BERKELEY CA 94710

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
S4091	SANYO ELECTRIC CO LTD		OSAKA JAPAN
TK0515	ERICSSON COMPONENTS INC	403 INTERNATIONAL PKY PO BOX 853904	RICHARDSON TX 75085-3904
TK0935	MARQUARDT SWITCHES INC	67 ALBANY ST PO BOX 465	CAZENOVIA NY 13035-1219
TK0946	SAN-O INDUSTRIAL CORP	170 WILBUR PL	BAHEMIA LONG ISLAND NY 11716
TK0987	TOPAZ SEMICONDUCTOR SUB OF HYTEK MICROSYSTEMS INC	1971 N CAPITOL AVE	SAN JOSE CA 95132-3799
TK1016	TOSHIBA AMERICA INC ELECTRONIC COMPONENTS DIV BUSINESS SECTOR	2692 DOW AVE	TUSTIN CA 92680
TK1066	STAR MICRONICS		
TK1345	ZMAN AND ASSOCIATES	7633 S 180TH	KENT WA 98032
TK1450	TOKYO COSMOS ELECTRIC CO LTD	2-268 SOBUDAI ZAWA	KANAGAWA 228 JAPAN
TK1544	COMPUTER CONNECTIONS	30608 SAN ANTONIO ST	HAYWARD CA 94544
TK1573	WILHELM WESTERMAN	PO BOX 2345 AUGUSTA-ANLAGE 56	6800 MANNHEIM 1 WEST GERMANY
TK2038	MULTICOMP INC	3005 SW 154TH TERRACE #3	BEAVERTON OR 97006
TK2042	ZMAN & ASSOCIATES	7633 S 180TH	KENT WA 98032

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A10	671-0365-00	B010100	B010185	CIRCUIT BD ASSY:MAIN	80009	671-0365-00
A10	671-0365-02	B010186	B010825	CIRCUIT BD ASSY:MAIN	80009	671-0365-02
A10	671-0365-03	B010826		CIRCUIT BD ASSY:MAIN (STANDARD)	80009	671-0365-03
A10	671-0365-03			CIRCUIT BD ASSY:MAIN (2440M)	80009	671-0365-03
A11	671-0366-00	B010100	B010504	CIRCUIT BD ASSY:TIME BASE DISPLAY	80009	671-0366-00
A11	671-0366-01	B010505	B010649	CIRCUIT BD ASSY:TIME BASE DISPLAY	80009	671-0366-01
A11	671-0366-02	B010650		CIRCUIT BD ASSY:TIME BASE (STANDARD)	80009	671-0366-02
A11	671-0366-02			CIRCUIT BD ASSY:TIME BASE (2440M)	80009	671-0366-02
A12	670-9746-17			CIRCUIT BD ASSY:PROCESSOR (STANDARD ONLY)	80009	670-9746-17
A12	670-9746-25			CIRCUIT BD ASSY:PROCESSOR (OPTION 05 ONLY)	80009	670-9746-25
A13	671-0125-00			CIRCUIT BD ASSY:SIDE	80009	671-0125-00
A14	614-0752-00			FRONT PNL ASSY:STANDARD (STANDARD)	80009	614-0752-00
A14	614-0753-00			FRONT PNL ASSY:TV OPT 05 (OPTION 05)	80009	614-0753-00
A15	175-9270-01			FLEX CKT ASSY:GPIB,POLYIMIDE	80009	175-9270-01
A16	670-9902-01			CIRCUIT BD ASSY:LV PWR SPLY	80009	670-9902-01
A17	670-9748-00			CIRCUIT BD ASSY:HV POWER SPLY	80009	670-9748-00
A18	670-7280-00			CIRCUIT BD ASSY:SCALE ILLUM	80009	670-7280-00
A30	671-0367-00			CIRCUIT BD ASSY:CCD OUT	80009	671-0367-00
A31	671-0367-00			CIRCUIT BD ASSY:CCD OUT	80009	671-0367-00
A32	671-0367-00			CIRCUIT BD ASSY:CCD OUT	80009	671-0367-00
A33	671-0367-00			CIRCUIT BD ASSY:CCD OUT	80009	671-0367-00

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10	671-0365-00	B010100	B010185	CIRCUIT BD ASSY:MAIN	80009	671-0365-00
A10	671-0365-02	B010186	B010825	CIRCUIT BD ASSY:MAIN	80009	671-0365-02
A10	671-0365-03	B010826		CIRCUIT BD ASSY:MAIN (STANDARD)	80009	671-0365-03
A10	671-0365-03			CIRCUIT BD ASSY:MAIN (2440M)	80009	671-0365-03
A10AT300	119-2342-06	B010100	B010488	ATTENUATOR, VAR:PROGRAMMABLE 1X-100X	80009	119-2342-06
A10AT300	119-2342-08	B010489		ATTENUATOR, VAR:1X-100X, CHANNEL 2 (2440 ONLY)	80009	119-2342-08
A10AT300	119-2342-08			ATTENUATOR, VAR:1X-100X, CHANNEL 2 (2440M ONLY)	80009	119-2342-08
A10AT400	119-2342-05	B010100	B010488	ATTENUATOR, VAR:PROGRAMMABLE 1X-100X	80009	119-2342-05
A10AT400	119-2342-07	B010589		ATTENUATOR, VAR:1X-100X, CHANNEL 1 (2440 ONLY)	80009	119-2342-07
A10AT400	119-2342-07			ATTENUATOR, VAR:1X-100X, CHANNEL 1 (2440M ONLY)	80009	119-2342-07
A10C101	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C102	281-0786-00			CAP, FXD, CER DI:150PF, 10%, 100V	04222	MA101A151KAA
A10C110	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C111	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C112	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C120	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C122	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C140	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C141	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C142	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C143	281-0798-00			CAP, FXD, CER DI:51PF, 1%, 100V	04222	MA101A510GAA
A10C144	281-0798-00			CAP, FXD, CER DI:51PF, 1%, 100V	04222	MA101A510GAA
A10C150	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C160	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C161	290-0246-00			CAP, FXD, ELCTLT:3.3UF, 10%, 15V	12954	D3R3EA15K1
A10C162	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C169	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C172	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C189	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C190	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C201	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C202	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C205	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C210	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C211	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C212	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C213	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C214	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C215	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C216	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C220	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C222	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C223	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C225	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C230	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C231	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C232	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C233	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C240	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C241	290-0246-00			CAP, FXD, ELCTLT:3.3UF, 10%, 15V	12954	D3R3EA15K1
A10C242	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C243	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C250	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10C257	281-0218-00			CAP, VAR, CER DI:1-5PF,+2 -2.5%,100V	59660	513-011A1-5
A10C260	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C263	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C264	283-0203-00			CAP, FXD, CER DI:0.47UF, 20%, 50V	04222	SR305SC474MAA
A10C265	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C272	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C280	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C281	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C282	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C283	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C287	281-0763-00			CAP, FXD, CER DI:47PF, 10%, 100V	04222	MA101A470KAA
A10C288	281-0763-00			CAP, FXD, CER DI:47PF, 10%, 100V	04222	MA101A470KAA
A10C290	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C311	281-0064-00			CAP, VAR, PLASTIC:0.25-1.5PF, 600V	52769	ER-530-013
A10C316	281-0909-00	B010250		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C319	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C320	281-0909-00	B010100	B010476	CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C321	281-0786-00	B010557		CAP, FXD, CER DI:150PF, 10%, 100V (STANDARD)	04222	MA101A151KAA
A10C321	281-0786-00			CAP, FXD, CER DI:150PF, 10%, 100V (2440M)	04222	MA101A151KAA
A10C322	281-0909-00	B010250		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C330	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C340	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C341	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C350	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C361	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C367	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C370	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C371	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C372	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C375	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C380	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C390	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C391	281-0798-00			CAP, FXD, CER DI:51PF, 1%, 100V	04222	MA101A510GAA
A10C410	283-0203-00			CAP, FXD, CER DI:0.47UF, 20%, 50V	04222	SR305SC474MAA
A10C412	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C414	281-0064-00			CAP, VAR, PLASTIC:0.25-1.5PF, 600V	52769	ER-530-013
A10C420	281-0909-00	B010100	B010476	CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C421	281-0786-00	B010557		CAP, FXD, CER DI:150PF, 10%, 100V (STANDARD)	04222	MA101A151KAA
A10C421	281-0786-00			CAP, FXD, CER DI:150PF, 10%, 100V (2440M)	04222	MA101A151KAA
A10C422	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C423	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C430	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C431	281-0093-00			CAP, VAR, CER DI:5.5-18PF, 350V	52763	302322237
A10C432	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C440	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C441	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C456	281-0218-00			CAP, VAR, CER DI:1-5PF,+2 -2.5%,100V	59660	513-011A1-5
A10C462	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C463	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C464	283-0203-00			CAP, FXD, CER DI:0.47UF, 20%, 50V	04222	SR305SC474MAA
A10C465	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C467	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C468	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C471	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C472	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10C473	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C474	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C480	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C481	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C483	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C484	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C488	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C490	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C491	281-0798-00			CAP, FXD, CER DI:51PF, 1%, 100V	04222	MA101A510GAA
A10C492	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C493	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C500	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C509	283-0203-00			CAP, FXD, CER DI:0.47UF, 20%, 50V	04222	SR305SC474MAA
A10C510	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C511	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C512	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C522	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C523	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C524	290-0943-02			CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C530	290-0776-00			CAP, FXD, ELCTLT:22UF, +50-20 %, 10V	55680	ULA1A220TAA
A10C532	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C535	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C540	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C541	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C542	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C550	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C561	285-1362-00			CAP, FXD, PLASTIC:560PF, 2.5%, 100V	TK1573	FKP2 560PF 2.5%
A10C562	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C563	285-1362-00			CAP, FXD, PLASTIC:560PF, 2.5%, 100V	TK1573	FKP2 560PF 2.5%
A10C581	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C582	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C590	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C591	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C600	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C601	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C602	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C630	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C631	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C632	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C633	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C640	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C641	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C642	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C643	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C644	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C645	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C646	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C647	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C648	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C649	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C650	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C651	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C652	290-0943-02	B010186	B010825	CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C652	281-0909-00	B010826		CAP, FXD, CER DI:0.022UF, 20%, 50V (STANDARD)	54583	MA12X7R1H223M-T
A10C652	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V (2440M)	54583	MA12X7R1H223M-T
A10C653	285-1301-01			CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A10C654	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C655	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C656	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C660	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C661	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C662	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C663	285-1362-00		CAP, FXD, PLASTIC:560PF, 2.5%, 100V	TK1573	FKP2 560PF 2.5%
A10C664	285-1362-00		CAP, FXD, PLASTIC:560PF, 2.5%, 100V	TK1573	FKP2 560PF 2.5%
A10C685	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C686	290-0943-02		CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C690	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C701	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C711	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C730	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C731	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C732	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C733	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C734	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C735	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C740	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C741	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C742	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C743	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C744	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C745	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C746	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C747	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C748	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C751	281-0814-00		CAP, FXD, CER DI:100 PF, 10%, 100V	04222	MA101A101KAA
A10C752	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C753	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C760	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C761	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C762	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C763	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C765	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C768	290-0943-02		CAP, FXD, ELCTLT:47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C770	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C771	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C774	285-1362-00		CAP, FXD, PLASTIC:560PF, 2.5%, 100V	TK1573	FKP2 560PF 2.5%
A10C780	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C781	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C784	285-1362-00		CAP, FXD, PLASTIC:560PF, 2.5%, 100V	TK1573	FKP2 560PF 2.5%
A10C809	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C810	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C812	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C813	281-0763-00		CAP, FXD, CER DI:47PF, 10%, 100V	04222	MA101A470KAA
A10C817	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C820	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C821	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C822	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C823	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C824	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C825	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C826	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C830	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C832	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C834	285-1301-01		CAP, FXD, MTLZD:0.47UF, 10%, 50V	55112	1850.47K50ABB

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A10C835	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C840	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C843	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C844	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C850	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C851	290-0943-02		CAP, FXD, ELCTLT: 47UF, 20%, 25V	55680	UVX1E470MAA1TD
A10C870	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C872	285-1362-00		CAP, FXD, PLASTIC: 560PF, 2.5%, 100V	TK1573	FKP2 560PF 2.5%
A10C880	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C882	285-1362-00		CAP, FXD, PLASTIC: 560PF, 2.5%, 100V	TK1573	FKP2 560PF 2.5%
A10C950	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C951	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A10C955	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C956	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C957	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C958	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C960	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C961	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C965	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C966	285-1301-01		CAP, FXD, MTLZD: 0.47UF, 10%, 50V	55112	1850.47K50ABB
A10C1005	283-0000-00		CAP, FXD, CER DI: 0.001UF, +100-0%, 500V	59660	831-610-Y5U0102P
A10C1006	283-0000-00		CAP, FXD, CER DI: 0.001UF, +100-0%, 500V	59660	831-610-Y5U0102P
A10CR140	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR141	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR220	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR221	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR222	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR223	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR224	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR225	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR226	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR227	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR228	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR270	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR285	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR286	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR290	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR291	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR292	152-0951-00		SEMICON DVC, DI: SCHOTTKY, SI, 60V, 2.25PF	80009	152-0951-00
A10CR310	152-0323-01		SEMICON DVC, DI: SW, SI, 50V, 25PA AT 20V, 20PF	14552	MT5127
A10CR311	152-0323-01		SEMICON DVC, DI: SW, SI, 50V, 25PA AT 20V, 20PF	14552	MT5127
A10CR392	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR410	152-0323-01		SEMICON DVC, DI: SW, SI, 50V, 25PA AT 20V, 20PF	14552	MT5127
A10CR411	152-0323-01		SEMICON DVC, DI: SW, SI, 50V, 25PA AT 20V, 20PF	14552	MT5127
A10CR420	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR421	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR490	152-0951-00		SEMICON DVC, DI: SCHOTTKY, SI, 60V, 2.25PF	80009	152-0951-00
A10CR491	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR500	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR501	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR502	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR503	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR521	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR530	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR551	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR552	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR553	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A10CR580	152-0650-00		SEMICON DVC, DI: VVC, 30V, 11.5PF, A276	50101	U11-4101

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10CR581	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR582	152-0650-00			SEMICON DVC,DI:VVC,30V,11.5PF,A276	50101	U11-4101
A10CR590	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR591	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR600	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR601	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR602	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR610	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR612	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR613	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR614	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR620	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR621	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR622	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR701	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR702	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR771	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR774	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR780	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR784	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR810	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR870	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR874	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR880	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10CR884	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10J104	131-3176-00			CONN,RCPT,ELEC:CKT BD,1 X 6,0.1 SPACING	00779	643091-1
A10J105	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 7)	22526	48283-036
A10J106	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 2)	22526	48283-036
A10J107	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 4)	22526	48283-036
A10J108	131-3152-00			CONN,RCPT,ELEC:HEADER,2 X 8 0.1 SPACING	22526	66506-043
A10J111	131-3181-00			CONN,RCPT,ELEC:HEADER,RTANG,2 X 20,0.1 CTR	22526	75867-007
A10J113	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 8)	22526	48283-036
A10J114	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 4)	22526	48283-036
A10J135	131-0608-00	B010186		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (STANDARD)	22526	48283-036
A10J135	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (2440M)	22526	48283-036
A10J141	131-3182-00			CONN,RCPT,ELEC:HDR,RTANG,2 X 25,0.1 CENTER	22526	75867-008
A10J145	131-0608-00	B010186		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (STANDARD)	22526	48283-036
A10J145	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (2440M)	22526	48283-036
A10J146	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 3)	22526	48283-036
A10J147	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 3)	22526	48283-036
A10J152	131-3152-00			CONN,RCPT,ELEC:HEADER,2 X 8 0.1 SPACING	22526	66506-043
A10J157	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10J190	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 12)	22526	48283-036
A10J191	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 3)	22526	48283-036
A10J192	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 12)	22526	48283-036
A10J2001	131-0679-13			CONTACT,ELEC:2 CONTACT,BNC	80009	131-0679-13

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discnt	Name & Description	Mfr. Code	Mfr. Part No.
A10J2002	131-0679-13			CONTACT, ELEC:2 CONTACT, BNC	80009	131-0679-13
A10J2004	-----			(PART OF A10AT400)		
A10J2005	-----			(PART OF A10AT300)		
A10J2006	131-0608-00			TERMINAL, PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10J2006	131-2716-01			TERMINAL, CAL:	80009	131-2716-01
A10L120	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L150	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L200	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L210	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L220	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L250	108-1309-00			COIL, RF: FXD, 70NH, 15%	TK2042	ORDER BY DESCR
A10L260	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L261	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L270	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L332	108-0262-00			COIL, RF: FIXED, 505NH	80009	108-0262-00
A10L340	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L431	114-0266-00			COIL, RF: VARIABLE, 400-800NH	80009	114-0266-00
A10L460	108-1309-00			COIL, RF: FXD, 70NH, 15%	TK2042	ORDER BY DESCR
A10L480	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L510	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L520	108-0538-00	B010100	B010249	COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L521	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A10L530	108-0262-00			COIL, RF: FIXED, 505NH	80009	108-0262-00
A10L531	114-0266-00			COIL, RF: VARIABLE, 400-800NH	80009	114-0266-00
A10LR215	108-0330-00			COIL, RF: FIXED, 403NH	TK2042	ORDER BY DESCR
A10LR220	108-0284-00			COIL, RF: FIXED, 97NH	TK2042	ORDER BY DESCR
A10LR341	108-0328-00			COIL, RF: FIXED, 275UH	TK1345	108-0328-00
A10LR342	108-0328-00			COIL, RF: FIXED, 275UH	TK1345	108-0328-00
A10LR344	108-0328-00			COIL, RF: FIXED, 275UH	TK1345	108-0328-00
A10LR345	108-0328-00			COIL, RF: FIXED, 275UH	TK1345	108-0328-00
A10LR410	108-0325-00			COIL, RF: FIXED, 489NH	TK2042	ORDER BY DESCR
A10LR421	108-0284-00			COIL, RF: FIXED, 97NH	TK2042	ORDER BY DESCR
A10LR422	108-0330-00			COIL, RF: FIXED, 403NH	TK2042	ORDER BY DESCR
A10LR450	108-0777-00			COIL, RF: FIXED, 93NH, 15%	80009	108-0777-00
A10LR451	108-0777-00			COIL, RF: FIXED, 93NH, 15%	80009	108-0777-00
A10LR452	108-0777-00			COIL, RF: FIXED, 93NH, 15%	80009	108-0777-00
A10LR453	108-0777-00			COIL, RF: FIXED, 93NH, 15%	80009	108-0777-00
A10LR454	108-0777-00			COIL, RF: FIXED, 93NH, 15%	80009	108-0777-00
A10LR455	108-0777-00			COIL, RF: FIXED, 93NH, 15%	80009	108-0777-00
A10LR456	108-0777-00			COIL, RF: FIXED, 93NH, 15%	80009	108-0777-00
A10LR457	108-0777-00			COIL, RF: FIXED, 93NH, 15%	80009	108-0777-00
A10LR510	108-0325-00			COIL, RF: FIXED, 489NH	TK2042	ORDER BY DESCR
A10LR520	108-0325-00	B010250		COIL, RF: FIXED, 489NH	TK2042	ORDER BY DESCR
A10P125	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK (STANDARD)	22526	65474-005
A10P125	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK (2440M)	22526	65474-005
A10P145	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK (STANDARD)	22526	65474-005
A10P145	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK (2440M)	22526	65474-005
A10Q110	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A10Q140	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A10Q150	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q151	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q170	151-0223-00	B010100	B010185	TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q240	151-0198-01			TRANSISTOR: NPN, SI, TO-92 PLSTC	80009	151-0198-01
A10Q250	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A10Q251	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q270	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q271	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A10Q287	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q288	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q290	151-0367-00			TRANSISTOR: NPN, SI, TO-92	04713	SPS 8811
A10Q291	151-0367-00			TRANSISTOR: NPN, SI, TO-92	04713	SPS 8811
A10Q356	151-0188-00	B010250		TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q372	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q375	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q380	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q390	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q391	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q392	151-0367-00			TRANSISTOR: NPN, SI, TO-92	04713	SPS 8811
A10Q393	151-0192-05			TRANSISTOR: NPN, SI, TO-92	04713	ORDER BY DESCR
A10Q446	151-0188-00	B010250		TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q450	151-0221-08			TRANSISTOR: PNP, SI, TO-92	80009	151-0221-08
A10Q460	151-0221-08			TRANSISTOR: PNP, SI, TO-92	80009	151-0221-08
A10Q490	151-0367-00			TRANSISTOR: NPN, SI, TO-92	04713	SPS 8811
A10Q491	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q492	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q493	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q494	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A10Q495	151-0192-05			TRANSISTOR: NPN, SI, TO-92	04713	ORDER BY DESCR
A10Q530	151-0622-00			TRANSISTOR: PNP, SI, 40V, 1A, TO-226AE/237	04713	SPS8956(MPSW51A)
A10Q540	151-0622-00			TRANSISTOR: PNP, SI, 40V, 1A, TO-226AE/237	04713	SPS8956(MPSW51A)
A10Q551	151-0221-08			TRANSISTOR: PNP, SI, TO-92	80009	151-0221-08
A10Q580	151-0622-00			TRANSISTOR: PNP, SI, 40V, 1A, TO-226AE/237	04713	SPS8956(MPSW51A)
A10Q620	151-0622-00			TRANSISTOR: PNP, SI, 40V, 1A, TO-226AE/237	04713	SPS8956(MPSW51A)
A10Q621	151-0622-00			TRANSISTOR: PNP, SI, 40V, 1A, TO-226AE/237	04713	SPS8956(MPSW51A)
A10Q630	151-0622-00			TRANSISTOR: PNP, SI, 40V, 1A, TO-226AE/237	04713	SPS8956(MPSW51A)
A10Q640	151-0622-00			TRANSISTOR: PNP, SI, 40V, 1A, TO-226AE/237	04713	SPS8956(MPSW51A)
A10Q660	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q670	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q770	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q771	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q772	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q773	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q774	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q775	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q780	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q781	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q782	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q783	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q784	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q785	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q810	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A10Q870	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q871	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q872	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q873	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q874	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q875	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q880	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q881	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q882	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL
A10Q883	151-0223-00			TRANSISTOR: NPN, SI, 625MW, TO-92	80009	151-0223-00
A10Q884	151-0216-04			TRANSISTOR: PNP, SI, TO-92	04713	SPS8803RL

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discort	Name & Description	Mfr. Code	Mfr. Part No.
A10Q885	151-0216-04			TRANSISTOR:PNP,SI,TO-92	04713	SPS8803RL
A10Q970	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A10Q980	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A10R102	321-0657-07			RES,FXD,FILM:60 OHM,0.1%,0.125W,TC=T9	57668	RB148ZE 60E
A10R110	321-1700-04			RES,FXD,FILM:10.44K OHM,0.1%,0.125W,TC=T2	19701	5033RC10K440B
A10R111	315-0301-00			RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A10R112	315-0752-00			RES,FXD,FILM:7.5K OHM,5%,0.25W	57668	NTR25J-E07K5
A10R120	315-0562-00			RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A10R121	308-0755-00	B010100	B010174	RES,FXD,WW:0.75 OHM,5%,2W	75042	BW-R7500J
A10R121	308-0836-00	B010175		RES,FXD,WW:1.2 OHM,5%,1W FUSIBLE	75042	BW-20F-1.20HM 5%
A10R130	321-0275-00			RES,FXD,FILM:7.15K OHM,1%,0.125W,TC=TO	07716	CEAD71500F
A10R131	321-0333-00			RES,FXD,FILM:28.7K OHM,1%,0.125W,TC=TO	19701	5043ED28K70F
A10R132	321-0085-00			RES,FXD,FILM:75 OHM,1%,0.125W,TC=TO	57668	CRB14FXE 75 OHM
A10R133	321-0275-00			RES,FXD,FILM:7.15K OHM,1%,0.125W,TC=TO	07716	CEAD71500F
A10R134	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A10R135	321-0287-00			RES,FXD,FILM:9.53K OHM,1%,0.125W,TC=TO	19701	5033ED9K530F
A10R136	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A10R140	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A10R141	321-0063-00			RES,FXD,FILM:44.2 OHM,0.5%,0.125W,TC=TO	91637	CMF55116644R20F
A10R142	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R143	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A10R144	315-0180-00			RES,FXD,FILM:18 OHM,5%,0.25W	19701	5043CX18R00J
A10R145	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A10R146	315-0272-00			RES,FXD,FILM:2.7K OHM,5%,0.25W	57668	NTR25J-E02K7
A10R150	315-0122-00			RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A10R151	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R160	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R161	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R162	315-0470-00			RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A10R163	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R165	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R170	315-0302-00	B010100	B010185	RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A10R171	315-0103-00	B010100	B010185	RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R171	313-1182-00	B010186		RES,FXD,FILM:1.8K OHM 5%,0.2W (STANDARD)	57668	TR20JT681K8
A10R171	313-1182-00			RES,FXD,FILM:1.8K OHM 5%,0.2W (2440M)	57668	TR20JT681K8
A10R182	315-0560-00			RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A10R183	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R184	315-0181-00			RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A10R185	315-0390-00			RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A10R186	315-0181-00			RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A10R188	307-0546-00			RES NTWK,FXD,FI:5.750HM,5%,0.15 W	11236	750/770-61-R75
A10R201	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R202	315-0272-00			RES,FXD,FILM:2.7K OHM,5%,0.25W	57668	NTR25J-E02K7
A10R210	321-1700-04			RES,FXD,FILM:10.44K OHM,0.1%,0.125W,TC=T2	19701	5033RC10K440B
A10R211	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R215	321-0054-00			RES,FXD,FILM:35.7 OHM,0.5%,0.125W,TC=TO MI	91637	CMF55116635R70F
A10R216	321-0122-00			RES,FXD,FILM:182 OHM,1%,0.125W,TC=TO	19701	5033ED182R0F
A10R220	301-0361-00			RES,FXD,FILM:360 OHM,5%,0.5W	19701	5053CX360R0J
A10R222	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A10R225	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A10R230	321-0310-00			RES,FXD,FILM:16.5K OHM,1%,0.125W,TC=TO	19701	5033ED16K50F
A10R231	321-0310-00			RES,FXD,FILM:16.5K OHM,1%,0.125W,TC=TO	19701	5033ED16K50F
A10R232	321-0252-00			RES,FXD,FILM:4.12K OHM,1%,0.125W,TC=TO	07716	CEAD41200F
A10R233	311-2234-00			RES,VAR,NONWW:TRMR,5K OHM,20%,0.5W LINEAR	TK1450	GF06UT 5K
A10R234	321-0062-00			RES,FXD,FILM:43.2 OHM,0.5%,0.125W,TC=TO	57668	CRB14 FXE 43.2
A10R235	321-0275-00			RES,FXD,FILM:7.15K OHM,1%,0.125W,TC=TO	07716	CEAD71500F

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A10R236	321-0310-00		RES, FXD, FILM:16.5K OHM, 1%, 0.125W, TC=TO	19701	5033ED16K50F
A10R237	321-0310-00		RES, FXD, FILM:16.5K OHM, 1%, 0.125W, TC=TO	19701	5033ED16K50F
A10R238	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R240	321-0139-00		RES, FXD, FILM:274 OHM, 1%, 0.125W, TC=TO	07716	CEAD274ROF
A10R241	321-0201-00		RES, FXD, FILM:1.21K OHM, 1%, 0.125W, TC=TO	19701	5043ED1K210F
A10R242	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R243	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R244	321-0357-00		RES, FXD, FILM:51.1K OHM, 1%, 0.125W, TC=TO	07716	CEAD51101F
A10R245	315-0911-00		RES, FXD, FILM:910 OHM, 5%, 0.25W	57668	NTR25J-E910E
A10R250	315-0470-00		RES, FXD, FILM:47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A10R251	315-0222-00		RES, FXD, FILM:2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A10R252	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R253	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R255	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R260	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R261	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R262	315-0101-00		RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R263	311-2229-00		RES, VAR, NONWW: TRMR, 250 OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 250
A10R265	313-1332-00	B010186	RES, FXD, FILM:3.3K OHM, 5%, 0.2W	57668	TR20JE 03K3
A10R267	315-0912-00		RES, FXD, FILM:9.1K OHM, 5%, 0.25W	57668	NTR25J-E09K1
A10R268	315-0362-00		RES, FXD, FILM:3.6K OHM, 5%, 0.25W	19701	5043CX3K600J
A10R269	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R270	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R271	315-0152-00		RES, FXD, FILM:1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A10R273	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R274	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R275	315-0560-00		RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A10R276	313-1102-00		RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R278	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R279	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R280	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R281	315-0470-00		RES, FXD, FILM:47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A10R282	315-0470-00		RES, FXD, FILM:47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A10R283	322-3105-00		RES, FXD, FILM:121 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 121E
A10R284	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R285	307-0542-00		RES NTWK, FXD, FI:(5)10K OHM, 5%, 0.125W	01121	106A1030R706A103
A10R286	315-0560-00		RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A10R287	315-0560-00		RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A10R288	315-0560-00		RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A10R289	315-0750-00		RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R290	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R291	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R292	315-0151-00		RES, FXD, FILM:150 OHM, 5%, 0.25W	57668	NTR25J-E150E
A10R293	315-0151-00		RES, FXD, FILM:150 OHM, 5%, 0.25W	57668	NTR25J-E150E
A10R294	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R295	315-0302-00		RES, FXD, FILM:3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A10R296	315-0152-00		RES, FXD, FILM:1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A10R297	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R298	315-0101-00		RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R299	315-0104-00		RES, FXD, FILM:100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A10R320	321-0085-00		RES, FXD, FILM:75 OHM, 1%, 0.125W, TC=TO	57668	CRB14FXE 75 OHM
A10R340	321-0143-00		RES, FXD, FILM:301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301ROF
A10R341	322-3143-00		RES, FXD, FILM:301 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 301E
A10R342	322-3143-00		RES, FXD, FILM:301 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 301E
A10R343	321-0357-00		RES, FXD, FILM:51.1K OHM, 1%, 0.125W, TC=TO	07716	CEAD51101F
A10R344	322-3143-00		RES, FXD, FILM:301 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 301E
A10R345	322-3143-00		RES, FXD, FILM:301 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 301E
A10R346	311-2234-00		RES, VAR, NONWW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A10R347	311-2234-00			RES, VAR, NONWV: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R348	311-2234-00			RES, VAR, NONWV: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R349	311-2234-00			RES, VAR, NONWV: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R353	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R354	315-0302-00			RES, FXD, FILM: 3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A10R355	315-0302-00			RES, FXD, FILM: 3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A10R356	311-2231-00	B010100	B010249	RES, VAR, NONWV: TRMR, 1K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 1K
A10R356	311-2234-00	B010250		RES, VAR, NONWV: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R357	311-2234-00			RES, VAR, NONWV: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R358	311-2234-00			RES, VAR, NONWV: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R359	311-2234-00			RES, VAR, NONWV: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R361	315-0750-00			RES, FXD, FILM: 75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R368	315-0560-00			RES, FXD, FILM: 56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A10R370	307-0488-00			RES NTWK, FXD, FI: 5 100 OHM, 20%, 0.75W	01121	106A1010R706A101
A10R371	307-0546-00			RES NTWK, FXD, FI: 5, 750 OHM, 5%, 0.15 W	11236	750/770-61-R75
A10R372	315-0221-00			RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A10R373	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R374	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R375	315-0221-00			RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A10R376	315-0181-00			RES, FXD, FILM: 180 OHM, 5%, 0.25W	57668	NTR25J-E180E
A10R377	315-0181-00			RES, FXD, FILM: 180 OHM, 5%, 0.25W	57668	NTR25J-E180E
A10R378	321-0385-00	B010100	B010185	RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A10R378	322-3385-00	B010186		RES, FXD, FILM: 100K OHM, 1%, 0.2W, TC=TO (STANDARD)	57668	CRB20 FXE 100K
A10R378	322-3385-00	B010186		RES, FXD, FILM: 100K OHM, 1%, 0.2W, TC=TO (2440M)	57668	CRB20 FXE 100K
A10R379	321-0385-00	B010100	B010185	RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A10R379	322-3385-00	B010186		RES, FXD, FILM: 100K OHM, 1%, 0.2W, TC=TO (STANDARD)	57668	CRB20 FXE 100K
A10R379	322-3385-00	B010186		RES, FXD, FILM: 100K OHM, 1%, 0.2W, TC=TO (2440M)	57668	CRB20 FXE 100K
A10R380	315-0122-00			RES, FXD, FILM: 1.2K OHM, 5%, 0.25W	57668	NTR25J-E01K2
A10R381	315-0362-00			RES, FXD, FILM: 3.6K OHM, 5%, 0.25W	19701	5043CX3K600J
A10R382	315-0511-00			RES, FXD, FILM: 510 OHM, 5%, 0.25W	19701	5043CX510R0J
A10R383	313-1511-00			RES, FXD, FILM: 510 OHM, 5%, 0.2W	57668	TR20JT68 510E
A10R384	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R385	315-0511-00			RES, FXD, FILM: 510 OHM, 5%, 0.25W	19701	5043CX510R0J
A10R386	315-0121-00			RES, FXD, FILM: 120 OHM, 5%, 0.25W	19701	5043CX120R0J
A10R387	315-0222-00			RES, FXD, FILM: 2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A10R389	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R390	315-0301-00			RES, FXD, FILM: 300 OHM, 5%, 0.25W	57668	NTR25J-E300E
A10R391	315-0390-00			RES, FXD, FILM: 39 OHM, 5%, 0.25W	57668	NTR25J-E39E0
A10R392	321-0450-00			RES, FXD, FILM: 475K OHM, 1%, 0.125W, TC=TO	19701	5043ED475K0F
A10R393	315-0222-00			RES, FXD, FILM: 2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A10R394	315-0302-00			RES, FXD, FILM: 3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A10R395	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R396	315-0302-00			RES, FXD, FILM: 3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A10R397	315-0152-00			RES, FXD, FILM: 1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A10R398	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R399	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R410	311-2229-00			RES, VAR, NONWV: TRMR, 250 OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 250
A10R420	315-0121-00			RES, FXD, FILM: 120 OHM, 5%, 0.25W	19701	5043CX120R0J
A10R425	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R430	321-0252-00			RES, FXD, FILM: 4.12K OHM, 1%, 0.125W, TC=TO	07716	CEAD41200F
A10R431	311-2234-00			RES, VAR, NONWV: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R435	315-0911-00			RES, FXD, FILM: 910 OHM, 5%, 0.25W	57668	NTR25J-E910E
A10R436	311-2229-00			RES, VAR, NONWV: TRMR, 250 OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 250
A10R437	313-1332-00	B010250		RES, FXD, FILM: 3.3K OHM, 5%, 0.2W	57668	TR20JE 03K3

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10R438	313-1332-00	B010250		RES, FXD, FILM: 3.3K OHM, 5%, 0.2W	57668	TR20JE 03K3
A10R440	321-0143-00			RES, FXD, FILM: 301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301ROF
A10R441	321-0357-00			RES, FXD, FILM: 51.1K OHM, 1%, 0.125W, TC=TO	07716	CEAD51101F
A10R442	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R443	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R444	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R445	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R446	311-2231-00	B010100	B010249	RES, VAR, NONNW: TRMR, 1K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 1K
A10R446	311-2234-00	B010250		RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R447	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R448	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R449	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A10R452	315-0152-00			RES, FXD, FILM: 1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A10R453	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R454	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R455	315-0471-00			RES, FXD, FILM: 470 OHM, 5%, 0.25W	57668	NTR25J-E470E
A10R456	313-1471-00			RES, FXD, FILM: 470 OHM, 5%, 0.2W	57668	TR20JE 470E
A10R461	315-0152-00			RES, FXD, FILM: 1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A10R463	322-3252-00			RES, FXD, FILM: 4.12K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 4K12
A10R464	322-3289-00			RES, FXD, FILM: 10K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 10K0
A10R466	313-1683-00	B010374		RES, FXD, FILM: 68K OHM, 5%, 0.2W	57668	TR20JE 68K
A10R467	321-0385-00			RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A10R468	321-0385-00			RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A10R469	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R470	307-0488-00			RES NTWK, FXD, FI: 5 100 OHM, 20%, 0.75W	01121	106A1010R706A101
A10R471	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R477	315-0750-00			RES, FXD, FILM: 75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R478	315-0750-00			RES, FXD, FILM: 75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R479	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R480	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R481	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R482	322-3105-00			RES, FXD, FILM: 121 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 121E
A10R483	315-0202-00			RES, FXD, FILM: 2K OHM, 5%, 0.25W	57668	NTR25J-E 2K
A10R484	315-0750-00			RES, FXD, FILM: 75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R485	315-0750-00			RES, FXD, FILM: 75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A10R486	315-0180-00			RES, FXD, FILM: 18 OHM, 5%, 0.25W	19701	5043CX18R00J
A10R487	315-0180-00			RES, FXD, FILM: 18 OHM, 5%, 0.25W	19701	5043CX18R00J
A10R488	315-0180-00			RES, FXD, FILM: 18 OHM, 5%, 0.25W	19701	5043CX18R00J
A10R489	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R490	315-0151-00			RES, FXD, FILM: 150 OHM, 5%, 0.25W	57668	NTR25J-E150E
A10R491	315-0151-00			RES, FXD, FILM: 150 OHM, 5%, 0.25W	57668	NTR25J-E150E
A10R492	315-0104-00			RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A10R493	321-0450-00			RES, FXD, FILM: 475K OHM, 1%, 0.125W, TC=TO	19701	5043ED475K0F
A10R494	315-0301-00			RES, FXD, FILM: 300 OHM, 5%, 0.25W	57668	NTR25J-E300E
A10R495	315-0390-00			RES, FXD, FILM: 39 OHM, 5%, 0.25W	57668	NTR25J-E39E0
A10R496	315-0222-00			RES, FXD, FILM: 2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A10R497	315-0121-00			RES, FXD, FILM: 120 OHM, 5%, 0.25W	19701	5043CX120R0J
A10R498	315-0222-00			RES, FXD, FILM: 2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A10R499	315-0132-00			RES, FXD, FILM: 1.3K OHM, 5%, 0.25W	57668	NTR25J-E01K3
A10R500	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R501	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R502	315-0272-00			RES, FXD, FILM: 2.7K OHM, 5%, 0.25W	57668	NTR25J-E02K7
A10R510	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R512	301-0361-00			RES, FXD, FILM: 360 OHM, 5%, 0.5W	19701	5053CX360R0J
A10R515	321-0054-00			RES, FXD, FILM: 35.7 OHM, 0.5%, 0.125W, TC=TO MI	91637	CMF55116G35R70F
A10R516	321-0122-00			RES, FXD, FILM: 182 OHM, 1%, 0.125W, TC=TO	19701	5033ED182ROF
A10R520	321-0130-00			RES, FXD, FILM: 221 OHM, 1%, 0.125W, TC=TO	19701	5043ED221ROF
A10R522	313-1220-00	B010250		RES, FXD, FILM: 22 OHM, 5%, 0.2W	57668	TR20JE22E

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix		Serial/Assembly No. Effective Discnt	Name & Description	Mfr. Code	Mfr. Part No.
	Part No.					
A10R523	315-0220-00			RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A10R525	311-2229-00			RES,VAR, NONWV:TRMR,250 OHM,20%,0.5W LINEAR	TK1450	GF06JUT 250
A10R530	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R531	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R532	315-0151-00			RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A10R533	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A10R534	315-0150-00			RES,FXD,FILM:15 OHM,5%,0.25W	19701	5043CX15R00J
A10R535	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A10R536	321-0328-00			RES,FXD,FILM:25.5K OHM,1%,0.125W,TC=TO	19701	5043ED25K50F
A10R541	321-0357-00			RES,FXD,FILM:51.1K OHM,1%,0.125W,TC=TO	07716	CEAD51101F
A10R543	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R544	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R545	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A10R546	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A10R547	315-0150-00			RES,FXD,FILM:15 OHM,5%,0.25W	19701	5043CX15R00J
A10R550	315-0681-00			RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A10R551	315-0151-00			RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A10R555	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R556	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A10R557	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A10R558	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R564	313-1102-00			RES,FXD,FILM:1K OHM,5%,0.2W	57668	TR20JE01K0
A10R565	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A10R566	321-0260-00			RES,FXD,FILM:4.99K OHM,1%,0.125W,TC=TO	19701	5033ED4K990F
A10R567	322-3385-00			RES,FXD,FILM:100K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 100K
A10R568	322-3385-00			RES,FXD,FILM:100K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 100K
A10R570	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R571	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R572	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R573	315-0750-00			RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A10R574	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R575	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R580	315-0132-00			RES,FXD,FILM:1.3K OHM,5%,0.25W	57668	NTR25J-E01K3
A10R581	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A10R584	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A10R585	321-0318-00			RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A10R586	321-0335-00			RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A10R587	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R588	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R591	322-3172-00			RES,FXD,FILM:604 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 604E
A10R592	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A10R593	322-3172-00			RES,FXD,FILM:604 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 604E
A10R594	322-3172-00			RES,FXD,FILM:604 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 604E
A10R595	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A10R596	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A10R598	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A10R599	322-3289-00			RES,FXD,FILM:10K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 10K0
A10R600	307-0706-00			RES NTWK,FXD,FI:4.10K OHM,2%,0.2W EA	01121	208B103
A10R601	307-0542-00			RES NTWK,FXD,FI:(5)10K OHM,5%,0.125W	01121	106A1030R706A103
A10R612	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A10R613	315-0561-00			RES,FXD,FILM:560 OHM,5%,0.25W	19701	5043CX560R0J
A10R614	315-0391-00			RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A10R615	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R622	307-0108-00			RES,FXD,CMPNS:6.8 OHM,5%,0.25W	01121	CB68G5
A10R623	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A10R624	315-0561-00			RES,FXD,FILM:560 OHM,5%,0.25W	19701	5043CX560R0J
A10R625	315-0391-00			RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A10R626	321-0264-00			RES,FXD,FILM:5.49K OHM,1%,0.125W,TC=TO	07716	CEAD54900C

Component No.	Tektronix		Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
	Part No.					
A10R627	321-0264-00			RES, FXD, FILM: 5.49K OHM, 1%, 0.125W, TC=TO	07716	CEAD54900C
A10R628	321-0295-00			RES, FXD, FILM: 11.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD11501F
A10R631	315-0151-00			RES, FXD, FILM: 150 OHM, 5%, 0.25W	57668	NTR25J-E150E
A10R632	315-0472-00			RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A10R633	315-0150-00			RES, FXD, FILM: 15 OHM, 5%, 0.25W	19701	5043CX15R00J
A10R634	321-0264-00			RES, FXD, FILM: 5.49K OHM, 1%, 0.125W, TC=TO	07716	CEAD54900C
A10R635	321-0328-00			RES, FXD, FILM: 25.5K OHM, 1%, 0.125W, TC=TO	19701	5043ED25K50F
A10R636	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R637	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R639	321-0260-00			RES, FXD, FILM: 4.99K OHM, 1%, 0.125W, TC=TO	19701	5033ED4K990F
A10R640	321-0328-00			RES, FXD, FILM: 25.5K OHM, 1%, 0.125W, TC=TO	19701	5043ED25K50F
A10R641	321-0328-00			RES, FXD, FILM: 25.5K OHM, 1%, 0.125W, TC=TO	19701	5043ED25K50F
A10R642	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R643	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R646	315-0472-00			RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A10R647	315-0150-00			RES, FXD, FILM: 15 OHM, 5%, 0.25W	19701	5043CX15R00J
A10R648	315-0153-00			RES, FXD, FILM: 15K OHM, 5%, 0.25W	19701	5043CX15K00J
A10R649	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R650	313-1560-00	B010826		RES, FXD, FILM: 56 OHM, 5%, 0.2W (STANDARD)	57668	TR20JE 56E
A10R650	313-1560-00			RES, FXD, FILM: 56 OHM, 5%, 0.2W (2440M)	57668	TR20JE 56E
A10R651	315-0151-00			RES, FXD, FILM: 150 OHM, 5%, 0.25W	57668	NTR25J-E150E
A10R652	321-0344-00			RES, FXD, FILM: 37.4K OHM, 1%, 0.125W, TC=TO	19701	5033ED 37K40F
A10R653	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R654	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R655	321-0332-07			RES, FXD, FILM: 28.0K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE28K00B
A10R656	321-0926-07			RES, FXD, FILM: 4K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE4K00B
A10R660	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R661	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R662	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R663	321-0155-00			RES, FXD, FILM: 402 OHM, 1%, 0.125W, TC=TO	07716	CEAD402R0F
A10R664	321-0155-00			RES, FXD, FILM: 402 OHM, 1%, 0.125W, TC=TO	07716	CEAD402R0F
A10R665	321-0128-00			RES, FXD, FILM: 210 OHM, 1%, 0.125W, TC=TO	07716	CEAD210R0F
A10R666	313-1682-00			RES, FXD, FILM: 6.8K OHM, 5%, 0.2W	57668	TR20JE 06K8
A10R667	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R668	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R669	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R670	313-1750-00			RES, FXD, FILM: 75 OHM, 5%, 0.2W	57668	TR20JE 75E
A10R671	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R672	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R673	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R674	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R675	322-3126-00			RES, FXD, FILM: 200 OHM, 1%, 0.2W, TC=TO	91637	CCF501G200R0F
A10R676	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R677	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R678	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R680	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R681	322-3126-00			RES, FXD, FILM: 200 OHM, 1%, 0.2W, TC=TO	91637	CCF501G200R0F
A10R682	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R683	322-3210-00	B010100	B010373	RES, FXD, FILM: 1.5K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K50
A10R683	322-3216-00	B010374		RES, FXD, FILM: 1.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K74
A10R684	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R685	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R686	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R687	321-0239-00			RES, FXD, FILM: 3.01K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K010F
A10R690	322-3172-00			RES, FXD, FILM: 604 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 604E
A10R700	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10R710	307-0446-00			RES NTWK, FXD, FI:10K OHM, 20%, (9)RES	11236	750-101-R10K
A10R726	321-0295-00			RES, FXD, FILM:11.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD11501F
A10R730	321-0264-00			RES, FXD, FILM:5.49K OHM, 1%, 0.125W, TC=TO	07716	CEAD54900C
A10R731	321-0295-00			RES, FXD, FILM:11.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD11501F
A10R732	321-0295-00			RES, FXD, FILM:11.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD11501F
A10R734	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R735	321-0260-00			RES, FXD, FILM:4.99K OHM, 1%, 0.125W, TC=TO	19701	5033ED4K990F
A10R736	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R740	321-0311-00			RES, FXD, FILM:16.9K OHM, 1%, 0.125W, TC=TO	07716	CEAC16901F
A10R741	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R742	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R743	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R750	315-0153-00			RES, FXD, FILM:15K OHM, 5%, 0.25W	19701	5043CX15K00J
A10R751	321-0344-00			RES, FXD, FILM:37.4K OHM, 1%, 0.125W, TC=TO	19701	5033ED 37K40F
A10R752	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R753	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R760	315-0753-00			RES, FXD, FILM:75K OHM, 5%, 0.25W	57668	NTR25J-E75K0
A10R761	321-0296-00			RES, FXD, FILM:11.8K OHM, 1%, 0.125W, TC=TO	07716	CEAD11801F
A10R763	321-0210-00			RES, FXD, FILM:1.50K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K50F
A10R764	321-0282-00			RES, FXD, FILM:8.45K OHM, 1%, 0.125W, TC=TO	07716	CFAD84500F
A10R766	313-1102-00			RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R771	322-3210-00	B010100	B010373	RES, FXD, FILM:1.5K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K50
A10R771	322-3216-00	B010374		RES, FXD, FILM:1.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K74
A10R772	322-3126-00			RES, FXD, FILM:200 OHM, 1%, 0.2W, TC=TO	91637	CCF501G200ROF
A10R773	313-1202-00			RES, FXD, FILM:2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R774	322-3126-00			RES, FXD, FILM:200 OHM, 1%, 0.2W, TC=TO	91637	CCF501G200ROF
A10R775	322-3210-00	B010100	B010373	RES, FXD, FILM:1.5K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K50
A10R775	322-3216-00	B010374		RES, FXD, FILM:1.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K74
A10R777	313-1102-00			RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R778	313-1102-00			RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R779	313-1202-00			RES, FXD, FILM:2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R781	322-3210-00	B010100	B010373	RES, FXD, FILM:1.5K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K50
A10R781	322-3216-00	B010374		RES, FXD, FILM:1.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K74
A10R782	322-3126-00			RES, FXD, FILM:200 OHM, 1%, 0.2W, TC=TO	91637	CCF501G200ROF
A10R783	313-1202-00			RES, FXD, FILM:2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R784	322-3126-00			RES, FXD, FILM:200 OHM, 1%, 0.2W, TC=TO	91637	CCF501G200ROF
A10R785	313-1202-00			RES, FXD, FILM:2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R786	313-1202-00			RES, FXD, FILM:2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R788	313-1202-00			RES, FXD, FILM:2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R789	313-1202-00			RES, FXD, FILM:2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R790	313-1750-00			RES, FXD, FILM:75 OHM, 5%, 0.2W	57668	TR20JE 75E
A10R800	315-0102-00			RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R809	315-0102-00			RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R810	307-0706-00			RES NTWK, FXD, FI:4, 10K OHM, 2%, 0.2W EA	01121	2088103
A10R811	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R812	321-0148-00			RES, FXD, FILM:340 OHM, 1%, 0.125W, TC=TO	07716	CEAD340ROF
A10R813	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R814	321-0296-00			RES, FXD, FILM:11.8K OHM, 1%, 0.125W, TC=TO	07716	CEAD11801F
A10R815	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R816	321-0311-00			RES, FXD, FILM:16.9K OHM, 1%, 0.125W, TC=TO	07716	CEAC16901F
A10R817	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R818	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R820	315-0102-00			RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R821	315-0102-00			RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R822	315-0102-00			RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R823	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R824	315-0912-00			RES, FXD, FILM:9.1K OHM, 5%, 0.25W	57668	NTR25J-E09K1
A10R825	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10R828	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R830	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R831	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R832	321-0311-00			RES, FXD, FILM: 16.9K OHM, 1%, 0.125W, TC=TO	07716	CEAC16901F
A10R833	321-0311-00			RES, FXD, FILM: 16.9K OHM, 1%, 0.125W, TC=TO	07716	CEAC16901F
A10R840	321-0311-00			RES, FXD, FILM: 16.9K OHM, 1%, 0.125W, TC=TO	07716	CEAC16901F
A10R841	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A10R850	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R851	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R852	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R853	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R855	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R856	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R857	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A10R860	315-0123-00			RES, FXD, FILM: 12K OHM, 5%, 0.25W	57668	NTR25J-E12K0
A10R861	322-3164-00			RES, FXD, FILM: 499 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 499E
A10R863	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R868	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A10R871	322-3210-00	B010100	B010373	RES, FXD, FILM: 1.5K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K50
A10R871	322-3216-00	B010374		RES, FXD, FILM: 1.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K74
A10R872	322-3126-00			RES, FXD, FILM: 200 OHM, 1%, 0.2W, TC=TO	91637	CCF501G200ROF
A10R873	322-3210-00	B010100	B010373	RES, FXD, FILM: 1.5K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K50
A10R873	322-3216-00	B010374		RES, FXD, FILM: 1.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K74
A10R875	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R879	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R881	322-3210-00	B010100	B010373	RES, FXD, FILM: 1.5K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K50
A10R881	322-3216-00	B010374		RES, FXD, FILM: 1.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K74
A10R882	322-3126-00			RES, FXD, FILM: 200 OHM, 1%, 0.2W, TC=TO	91637	CCF501G200ROF
A10R883	322-3210-00	B010100	B010373	RES, FXD, FILM: 1.5K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K50
A10R883	322-3216-00	B010374		RES, FXD, FILM: 1.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K74
A10R884	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A10R885	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R891	313-1202-00			RES, FXD, FILM: 2K OHM, 5%, 0.2W	57668	TR20JE02K0
A10R950	322-3289-00			RES, FXD, FILM: 10K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 10K0
A10R951	322-3311-00			RES, FXD, FILM: 16.9K OHM, 1%, 0.2W, TC=TO	80009	322-3311-00
A10R952	322-3311-00			RES, FXD, FILM: 16.9K OHM, 1%, 0.2W, TC=TO	80009	322-3311-00
A10R953	322-3289-00			RES, FXD, FILM: 10K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 10K0
A10R954	322-3289-00			RES, FXD, FILM: 10K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 10K0
A10R955	322-3311-00			RES, FXD, FILM: 16.9K OHM, 1%, 0.2W, TC=TO	80009	322-3311-00
A10R956	322-3289-00			RES, FXD, FILM: 10K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 10K0
A10R957	322-3311-00			RES, FXD, FILM: 16.9K OHM, 1%, 0.2W, TC=TO	80009	322-3311-00
A10R1001	315-0240-00			RES, FXD, FILM: 24 OHM, 5%, 0.25W	57668	NTR25J-E24E0
A10R1002	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R1003	315-0240-00			RES, FXD, FILM: 24 OHM, 5%, 0.25W	57668	NTR25J-E24E0
A10R1004	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A10R1005	315-0474-00			RES, FXD, FILM: 470K OHM, 5%, 0.25W	19701	5043CX470K0J92U
A10R1006	315-0474-00			RES, FXD, FILM: 470K OHM, 5%, 0.25W	19701	5043CX470K0J92U
A10S600	260-1421-00			SWITCH, PUSH: 1 BTN, 2 POLE, INSTRUMENT ID	59821	ORDER BY DESCR
A10S800	260-1421-00			SWITCH, PUSH: 1 BTN, 2 POLE, INSTRUMENT ID	59821	ORDER BY DESCR
A10S801	260-1421-00			SWITCH, PUSH: 1 BTN, 2 POLE, INSTRUMENT ID	59821	ORDER BY DESCR
A10T370	120-0478-00			XFMR, TOROID:	TK1345	ORDER BY DESCR
A10T371	120-0478-00			XFMR, TOROID:	TK1345	ORDER BY DESCR
A10TP163	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP173	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP174	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP231	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP281	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP284	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discort	Name & Description	Mfr. Code	Mfr. Part No.
A10TP288	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP291	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP370	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP568	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP581	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP585	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP612	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP650	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP660	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10TP832	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A10U100	155-0238-00			MICROCKT,LINER:TRIGGER PREAMP	80009	155-0238-00
A10U120	156-1149-01			MICROCKT,LINER:OPERATION AMP JFET INPUT	27014	AL160307
A10U140	156-0651-00			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-00
A10U150	155-0239-02			MICROCKT,LINER:TRIGGER	80009	155-0239-02
A10U190	156-1663-00			MICROCKT,DGTL:ASTTL,TPL 3-INP & GATE	80009	156-1663-00
A10U220	156-1245-00			MICROCKT,LINER:7 XSTR,NPN,SI,HV/HIGH CUR	01295	ULN2003AN-P3
A10U221	156-0651-00			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-00
A10U230	156-0158-07			MICROCKT,LINER:DUAL OPNL AMPL,SCREENED	01295	MC1458JG4
A10U270	156-0651-00			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-00
A10U271	156-0469-00			MICROCKT,DGTL:3-LINE TO 8-LINE DECODER	01295	SN74LS138N
A10U272	156-0874-02			MICROCKT,DGTL:8 BIT ADDRESSABLE LATCH	80009	156-0874-02
A10U280	156-0383-00			MICROCKT,DGTL:QUAD 2-INP NOR GATE	01295	SN74LS02 N OR J
A10U320	165-2235-02			MICROCKT,HYBRID:ASSEM LOW NOISE VERT PREAMP	80009	165-2235-02
A10U340	-----			MICROCKT,HYBRID:PK DETECTOR ASSY		
A10U350	-----	B010100	B010999	MICROCKT,HYBRID:DRIVER/CCD ASSY		
A10U350	-----	B011000		MICROCKT,HYBRID:CCD DRIVER ASSY W/O DIODE		
A10U360	156-1191-01			MICROCKT,LINER:BIFET,DUAL OPNL AMPL,SCRN	80009	156-1191-01
A10U370	230-0028-50			WAFER,SILICON:TRIGGER LOGIC ARRAY,PKG PART	80009	230-0028-50
A10U380	156-2290-00			MICROCKT,DGTL:QUAD MECL TO TTL TRANSLATOR	04713	MC10H125P
A10U381	156-0518-00			MICROCKT,DGTL:PHASE FREQ DET,EMTR CPLLGC	04713	MC12040L
A10U390	156-1126-01			MICROCKT,LINER:VOLTAGE COMPARATOR,SELECTED	01295	LM311JG4
A10U420	165-2235-02			MICROCKT,HYBRID:ASSEM LOW NOISE VERT PREAMP	80009	165-2235-02
A10U440	-----			MICROCKT,HYBRID:PK DETECTOR ASSY		
A10U450	-----	B010100	B010999	MICROCKT,HYBRID:DRIVER/CCD ASSY		
A10U450	-----	B011000		MICROCKT,HYBRID:CCD DRIVER ASSY W/O DIODE		
A10U460	156-1191-01			MICROCKT,LINER:BIFET,DUAL OPNL AMPL,SCRN	80009	156-1191-01
A10U470	230-0027-50			INTERGRATED CKT:PHASE CLOCK ARRAY	80009	230-0027-50
A10U490	156-1126-01			MICROCKT,LINER:VOLTAGE COMPARATOR,SELECTED	01295	LM311JG4
A10U510	156-1245-00			MICROCKT,LINER:7 XSTR,NPN,SI,HV/HIGH CUR	01295	ULN2003AN-P3
A10U511	156-0651-00			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-00
A10U520	156-1245-00			MICROCKT,LINER:7 XSTR,NPN,SI,HV/HIGH CUR	01295	ULN2003AN-P3
A10U530	156-0651-00			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-00
A10U540	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A10U560	156-1303-00			MICROCKT,LINER:QUAD ANALOG SW ARRAY	TK0987	SD5000N
A10U570	156-1303-00			MICROCKT,LINER:QUAD ANALOG SW ARRAY	TK0987	SD5000N
A10U580	156-0158-07			MICROCKT,LINER:DUAL OPNL AMPL,SCREENED	01295	MC1458JG4
A10U590	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A10U600	156-0513-03			MICROCKT,LINER:CMOS,8 CHAN ANALOG MUX	04713	MC14051BCL
A10U610	165-2024-00			MICROCKT,HYBRID:CURSOR AMPLIFIER	80009	165-2024-00
A10U630	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A10U631	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A10U640	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A10U641	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A10U650	156-1492-00			MICROCKT,LINER:OPNL AMPL MONO,FET-INP	24355	AD542JH
A10U651	156-0513-03			MICROCKT,LINER:CMOS,8 CHAN ANALOG MUX	04713	MC14051BCL
A10U660	156-1492-00			MICROCKT,LINER:OPNL AMPL MONO,FET-INP	24355	AD542JH
A10U661	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A10U700	156-0789-00			MICROCKT,DGTL:8-BIT SR,PRL LOAD	01295	SN74LS165N

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A10U770	156-1272-00		MICROCKT, LINEAR: DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A10U780	156-1272-00		MICROCKT, LINEAR: DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A10U810	156-1191-01		MICROCKT, LINEAR: BIFET, DUAL OPNL AMPL, SCRN	80009	156-1191-01
A10U811	156-0513-03		MICROCKT, LINEAR: CMOS, 8 CHAN ANALOG MUX	04713	MC14051BCL
A10U812	156-0048-00		MICROCKT, LINEAR: 5 XSTR ARRAY	02735	CA3046
A10U820	156-1200-01		MICROCKT, LINEAR: BIFET, QUAD OPNL AMPL, SCRN	80009	156-1200-01
A10U821	156-0513-03		MICROCKT, LINEAR: CMOS, 8 CHAN ANALOG MUX	04713	MC14051BCL
A10U830	156-0513-03		MICROCKT, LINEAR: CMOS, 8 CHAN ANALOG MUX	04713	MC14051BCL
A10U831	156-0513-03		MICROCKT, LINEAR: CMOS, 8 CHAN ANALOG MUX	04713	MC14051BCL
A10U840	156-1200-01		MICROCKT, LINEAR: BIFET, QUAD OPNL AMPL, SCRN	80009	156-1200-01
A10U841	156-1200-01		MICROCKT, LINEAR: BIFET, QUAD OPNL AMPL, SCRN	80009	156-1200-01
A10U850	156-0651-00		MICROCKT, DGTL: 8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-00
A10U851	156-0651-00		MICROCKT, DGTL: 8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-00
A10U860	156-1589-00		MICROCKT, LINEAR: D/A CONV, 12 BIT, H SP, MONO	06665	DAC312FR
A10U861	156-1200-01		MICROCKT, LINEAR: BIFET, QUAD OPNL AMPL, SCRN	80009	156-1200-01
A10U870	156-1272-00		MICROCKT, LINEAR: DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A10U880	156-1272-00		MICROCKT, LINEAR: DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A10U950	156-1200-01		MICROCKT, LINEAR: BIFET, QUAD OPNL AMPL, SCRN	80009	156-1200-01
A10U951	156-1200-01		MICROCKT, LINEAR: BIFET, QUAD OPNL AMPL, SCRN	80009	156-1200-01
A10U960	156-0513-03		MICROCKT, LINEAR: CMOS, 8 CHAN ANALOG MUX	04713	MC14051BCL
A10VR200	152-0166-00		SEMICON DVC, DI: ZEN, SI, 6.2V, 5%, 400MW, DO-7	04713	SZ11738RL
A10VR298	152-0278-00		SEMICON DVC, DI: ZEN, SI, 3V, 5%, 0.4W, DO-7	80009	152-0278-00
A10VR390	152-0662-00		SEMICON DVC, DI: ZEN, SI, 5V, 1%, 400MW, DO-7	04713	SZG195RL
A10VR391	152-0662-00		SEMICON DVC, DI: ZEN, SI, 5V, 1%, 400MW, DO-7	04713	SZG195RL
A10VR420	152-0166-00		SEMICON DVC, DI: ZEN, SI, 6.2V, 5%, 400MW, DO-7	04713	SZ11738RL
A10VR492	152-0662-00		SEMICON DVC, DI: ZEN, SI, 5V, 1%, 400MW, DO-7	04713	SZG195RL
A10VR493	152-0662-00		SEMICON DVC, DI: ZEN, SI, 5V, 1%, 400MW, DO-7	04713	SZG195RL
A10W110	131-0566-00		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07
A10W221	131-0566-00		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07
A10W470	131-0566-00		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07
A10W511	131-0566-00		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07
A10W762	131-0566-00		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07
A10XU100	136-0764-00		SKT, PL-IN ELEK: 48 LINE CONT IMPD HYBRID	00779	ORDER BY DESCR
A10XU150	136-0764-00		SKT, PL-IN ELEK: 48 LINE CONT IMPD HYBRID	00779	ORDER BY DESCR
A10XU320	136-0763-00		SKT, PL-IN ELEK: 26 LINE CONT IMPD HYBRID	00779	ORDER BY DESCR
A10XU340	136-0764-00		SKT, PL-IN ELEK: 48 LINE CONT IMPD HYBRID	00779	ORDER BY DESCR
A10XU350	136-0764-00		SKT, PL-IN ELEK: 48 LINE CONT IMPD HYBRID	00779	ORDER BY DESCR
A10XU370	136-0813-00		SKT, PL-IN ELEK: CHIP CARRIER, 68 CONTACTS	19613	268-5400-00-1102
A10XU420	136-0763-00		SKT, PL-IN ELEK: 26 LINE CONT IMPD HYBRID	00779	ORDER BY DESCR
A10XU440	136-0764-00		SKT, PL-IN ELEK: 48 LINE CONT IMPD HYBRID	00779	ORDER BY DESCR
A10XU450	136-0764-00		SKT, PL-IN ELEK: 48 LINE CONT IMPD HYBRID	00779	ORDER BY DESCR
A10XU470	136-0813-00		SKT, PL-IN ELEK: CHIP CARRIER, 68 CONTACTS	19613	268-5400-00-1102

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A11	671-0366-00	B010100	B010504	CIRCUIT BD ASSY:TIME BASE DISPLAY	80009	671-0366-00
A11	671-0366-01	B010505	B010649	CIRCUIT BD ASSY:TIME BASE DISPLAY	80009	671-0366-01
A11	671-0366-02	B010650		CIRCUIT BD ASSY:TIME BASE (STANDARD)	80009	671-0366-02
A11	671-0366-02			CIRCUIT BD ASSY:TIME BASE (2440M)	80009	671-0366-02
A11C130	290-0967-00			CAP, FXD, ELCTLT:22UF, +50-10%, 25V	55680	TLB1E220TAAANA
A11C131	290-0967-00			CAP, FXD, ELCTLT:22UF, +50-10%, 25V	55680	TLB1E220TAAANA
A11C150	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C152	281-0786-00			CAP, FXD, CER DI:150PF, 10%, 100V	04222	MA101A151KAA
A11C154	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C166	281-0786-00			CAP, FXD, CER DI:150PF, 10%, 100V	04222	MA101A151KAA
A11C180	285-1344-00			CAP, FXD, PLASTIC:1000PF, 100V, 5%	TK1573	FKP2 1000 5% 100
A11C181	290-0808-00			CAP, FXD, ELCTLT:2.7UF, 10%, 20V	05397	T322B275K020AS
A11C182	290-0808-00			CAP, FXD, ELCTLT:2.7UF, 10%, 20V	05397	T322B275K020AS
A11C199	281-0771-00			CAP, FXD, CER DI:2200PF, 20%, 200V	04222	SA106E222MAA
A11C213	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C223	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C231	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C240	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C243	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C250	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C260	285-1342-00			CAP, FXD, PLASTIC:220PF, 100V, 5%	TK1573	FKP2 220 5% 100V
A11C261	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C264	285-1342-00			CAP, FXD, PLASTIC:220PF, 100V, 5%	TK1573	FKP2 220 5% 100V
A11C270	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C281	281-0762-00			CAP, FXD, CER DI:27PF, 20%, 100V	04222	MA101A270MAA
A11C282	290-0808-00			CAP, FXD, ELCTLT:2.7UF, 10%, 20V	05397	T322B275K020AS
A11C284	290-0808-00			CAP, FXD, ELCTLT:2.7UF, 10%, 20V	05397	T322B275K020AS
A11C290	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C291	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C292	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C312	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C313	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C323	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C324	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C331	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C340	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C341	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C342	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C350	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C390	283-0594-00			CAP, FXD, MICA DI:0.001UF, 1%, 100V	00853	D151F102F0
A11C392	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C400	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C401	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C402	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C414	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C415	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C416	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C420	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C422	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C450	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C460	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C490	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C500	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C510	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C511	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C513	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A11C520	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C521	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C522	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C523	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C531	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C532	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C540	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C541	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C550	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C551	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C555	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C560	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C570	290-1045-00			CAP, FXD, ELCTLT: 4.7UF, 10%, 35V	56289	173D475X9035W
A11C580	281-0909-00	B010330		CAP, FXD, CER DI: 0.022UF, 20%, 50V (STANDARD ONLY)	54583	MA12X7R1H223M-T
A11C580	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V (2440M ONLY)	54583	MA12X7R1H223M-T
A11C595	281-0810-00			CAP, FXD, CER DI: 5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A11C601	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C610	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C611	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C612	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C620	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C621	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C622	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C623	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C630	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C631	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C632	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C640	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C642	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C643	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C670	281-0909-00	B010170	B010504	CAP, FXD, CER DI: 0.022UF, 20%, 50V (STANDARD)	54583	MA12X7R1H223M-T
A11C680	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C691	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C692	290-1045-00			CAP, FXD, ELCTLT: 4.7UF, 10%, 35V	56289	173D475X9035W
A11C694	290-1045-00			CAP, FXD, ELCTLT: 4.7UF, 10%, 35V	56289	173D475X9035W
A11C700	290-0967-00			CAP, FXD, ELCTLT: 22UF, +50-10%, 25V	55680	TLB1E220TAAANA
A11C701	290-0967-00			CAP, FXD, ELCTLT: 22UF, +50-10%, 25V	55680	TLB1E220TAAANA
A11C702	290-0967-00			CAP, FXD, ELCTLT: 22UF, +50-10%, 25V	55680	TLB1E220TAAANA
A11C703	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C711	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C712	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C720	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C730	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C731	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C732	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C740	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C770	281-0785-00			CAP, FXD, CER DI: 68PF, 10%, 100V	04222	MA101A680KAA
A11C772	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C774	285-1300-01			CAP, FXD, MTLZD: 0.1UF, 10%, 63V	55112	185/0.1/K/63/ABA
A11C776	285-1300-01			CAP, FXD, MTLZD: 0.1UF, 10%, 63V	55112	185/0.1/K/63/ABA
A11C820	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C832	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C833	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C834	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C835	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A11C881	281-0758-00	B010330		CAP, FXD, CER DI: 15PF, 20%, 100V (STANDARD ONLY)	04222	SA102A150MAA
A11C881	281-0758-00			CAP, FXD, CER DI: 15PF, 20%, 100V (2440M ONLY)	04222	SA102A150MAA
A11C890	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C892	281-0777-00			CAP, FXD, CER DI: 51PF, 5%, 100V	04222	MA101A510JAA
A11C900	281-0770-00			CAP, FXD, CER DI: 1000PF, 20%, 100V	04222	MA101C102MAA
A11C901	281-0762-00			CAP, FXD, CER DI: 27PF, 20%, 100V	04222	MA101A270MAA
A11C903	281-0791-00			CAP, FXD, CER DI: 270PF, 10%, 100V	04222	MA101C271KAA
A11C907	281-0791-00			CAP, FXD, CER DI: 270PF, 10%, 100V	04222	MA101C271KAA
A11C912	285-1343-00			CAP, FXD, PLASTIC: 330PF, 100V, 5%	TK1573	FKP2 330 5% 100V
A11C920	281-0823-00			CAP, FXD, CER DI: 470PF, 10%, 50V	04222	MA105A471KAA
A11C925	281-0791-00			CAP, FXD, CER DI: 270PF, 10%, 100V	04222	MA101C271KAA
A11C930	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C932	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C934	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11C935	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A11CR190	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A11CR191	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A11CR193	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A11CR194	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A11CR280	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A11CR281	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A11CR283	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A11CR284	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A11CR671	152-0141-02	B010170	B010504	SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (STANDARD)	03508	DA2527 (1N4152)
A11CR672	152-0141-02	B010170	B010504	SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (STANDARD)	03508	DA2527 (1N4152)
A11J100	131-3182-00			CONN, RCPT, ELEC: HDR, RTANG, 2 X 25, 0.1 CENTER	22526	75867-008
A11J117	131-0589-00			TERMINAL, PIN: 0.46 L X 0.025 SQ, PH BRZ (QUANTITY OF 4)	22526	48283-029
A11J121	131-3181-00			CONN, RCPT, ELEC: HEADER, RTANG, 2 X 20, 0.1 CTR	22526	75867-007
A11J131	131-3182-00			CONN, RCPT, ELEC: HDR, RTANG, 2 X 25, 0.1 CENTER	22526	75867-008
A11J132	-----			WIRE, ELECTRICAL: 22 AWG, BARE, 12.0 L		
A11J148	131-0589-00			TERMINAL, PIN: 0.46 L X 0.025 SQ, PH BRZ (QUANTITY OF 5)	22526	48283-029
A11J513	131-0589-00			TERMINAL, PIN: 0.46 L X 0.025 SQ, PH BRZ (QUANTITY OF 2)	22526	48283-029
A11L692	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A11L694	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A11L770	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A11L800	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A11L801	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A11L802	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A11L803	108-0538-00			COIL, RF: FIXED, 2.7UH	76493	JWM#B7059
A11Q181	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A11Q182	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A11Q285	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A11Q286	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A11R132	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R133	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R140	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A11R141	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A11R145	321-0126-00			RES, FXD, FILM: 200 OHM, 1%, 0.125W, TC=TO	19701	5033ED200R0F
A11R151	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R152	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R153	315-0271-00			RES, FXD, FILM: 270 OHM, 5%, 0.25W	57668	NTR25J-E270E
A11R155	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F

Component No.	Elektronix		Serial/Assembly No. Effective Dscnt	Name & Description	Mfr.	
	Part No.				Code	Mfr. Part No.
A11R156	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R160	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R161	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R162	321-0222-00			RES, FXD, FILM:2.00K OHM, 1%, 0.125W, TC=TO	19701	5033ED2K00F
A11R163	321-0193-00			RES, FXD, FILM:1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A11R164	321-0193-00			RES, FXD, FILM:1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A11R165	321-0210-00			RES, FXD, FILM:1.50K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K50F
A11R171	321-0193-00			RES, FXD, FILM:1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A11R172	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R192	321-0165-00			RES, FXD, FILM:511 OHM, 1%, 0.125W, TC=TO	07716	CEAD511R0F
A11R193	315-0512-00			RES, FXD, FILM:5.1K OHM, 5%, 0.25W	57668	NTR25J-E05K1
A11R194	321-0001-00			RES, FXD, FILM:10 OHM, 1%, 0.125W, TC=TO	19701	5033RD10R00FMS
A11R196	321-0001-00			RES, FXD, FILM:10 OHM, 1%, 0.125W, TC=TO	19701	5033RD10R00FMS
A11R199	321-0193-00			RES, FXD, FILM:1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A11R223	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R230	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R232	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A11R262	315-0271-00			RES, FXD, FILM:270 OHM, 5%, 0.25W	57668	NTR25J-E270E
A11R272	321-0097-00			RES, FXD, FILM:100 OHM, 1%, 0.125W, TC=TO	91637	CMF551166100R0F
A11R274	321-0097-00			RES, FXD, FILM:100 OHM, 1%, 0.125W, TC=TO	91637	CMF551166100R0F
A11R276	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A11R280	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R282	321-0244-00			RES, FXD, FILM:3.40K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K400F
A11R288	315-0512-00			RES, FXD, FILM:5.1K OHM, 5%, 0.25W	57668	NTR25J-E05K1
A11R312	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A11R330	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R361	321-0165-00			RES, FXD, FILM:511 OHM, 1%, 0.125W, TC=TO	07716	CEAD511R0F
A11R362	321-0193-00			RES, FXD, FILM:1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A11R363	321-0193-00			RES, FXD, FILM:1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A11R364	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R366	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R376	311-2234-00			RES, VAR, NONNW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A11R380	321-0001-00			RES, FXD, FILM:10 OHM, 1%, 0.125W, TC=TO	19701	5033RD10R00FMS
A11R381	321-0001-00			RES, FXD, FILM:10 OHM, 1%, 0.125W, TC=TO	19701	5033RD10R00FMS
A11R382	321-0926-07			RES, FXD, FILM:4K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE4K00B
A11R383	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R384	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R385	321-0276-00			RES, FXD, FILM:7.32K OHM, 1%, 0.125W, TC=TO	19701	5043ED7K320F
A11R400	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A11R421	307-0446-00			RES NTWK, FXD, FI:10K OHM, 20%, (9)RES	11236	750-101-R10K
A11R441	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R450	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R470	321-0230-00			RES, FXD, FILM:2.43K OHM, 1%, 0.125W, TC=TO	19701	5043ED2K430F
A11R471	321-0273-00			RES, FXD, FILM:6.81K OHM, 1%, 0.125W, TC=TO	07716	CEAD68100F
A11R472	321-0300-00			RES, FXD, FILM:13.0K OHM, 1%, 0.125W, TC=TO	07716	CEAD13001F
A11R473	321-0377-00			RES, FXD, FILM:82.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD82501F
A11R474	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A11R475	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A11R480	321-0243-00			RES, FXD, FILM:3.32K OHM, 1%, 0.125W, TC=TO	19701	5033ED3K32F
A11R481	321-0251-00			RES, FXD, FILM:4.02K OHM, 1%, 0.125W, TC=TO	19701	5033ED4K020F
A11R482	321-0275-00			RES, FXD, FILM:7.15K OHM, 1%, 0.125W, TC=TO	07716	CEAD71500F
A11R483	321-0272-00			RES, FXD, FILM:6.65K OHM, 1%, 0.125W, TC=TO	19701	5043ED6K650F
A11R484	321-0326-00			RES, FXD, FILM:24.3K OHM, 1%, 0.125W, TC=TO	19701	5043ED24K30F
A11R485	321-0300-00			RES, FXD, FILM:13.0K OHM, 1%, 0.125W, TC=TO	07716	CEAD13001F
A11R490	321-0222-00			RES, FXD, FILM:2.00K OHM, 1%, 0.125W, TC=TO	19701	5033ED2K00F
A11R492	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A11R493	321-0289-00			RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A11R494	321-0414-00			RES, FXD, FILM:200K OHM, 1%, 0.125W, TC=TO	07716	CEAD20002F

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A11R501	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A11R522	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R530	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R542	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R555	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R570	321-0385-00			RES, FXD, FILM:100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A11R580	311-2234-00			RES, VAR, NONWW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A11R581	321-0193-00			RES, FXD, FILM:1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A11R583	311-2236-00			RES, VAR, NONWW: TRMR, 20K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 20K
A11R584	311-2236-00			RES, VAR, NONWW: TRMR, 20K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 20K
A11R585	311-2236-00			RES, VAR, NONWW: TRMR, 20K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 20K
A11R586	311-2234-00			RES, VAR, NONWW: TRMR, 5K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 5K
A11R587	311-2236-00			RES, VAR, NONWW: TRMR, 20K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 20K
A11R591	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R592	321-0816-00			RES, FXD, FILM:5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A11R593	315-0202-02			RES, FXD, CMPSN: 2K OHM, 5%, 0.25W	01121	CB2025
A11R594	315-0202-02			RES, FXD, CMPSN: 2K OHM, 5%, 0.25W	01121	CB2025
A11R595	315-0202-02			RES, FXD, CMPSN: 2K OHM, 5%, 0.25W	01121	CB2025
A11R596	315-0202-02			RES, FXD, CMPSN: 2K OHM, 5%, 0.25W	01121	CB2025
A11R601	321-0118-00			RES, FXD, FILM:165 OHM, 1%, 0.125W, TC=TO	07716	CEAD165R0F
A11R603	321-0129-00			RES, FXD, FILM:215 OHM, 1%, 0.125W, TC=TO	07716	CEAD215R0F
A11R605	321-0097-00			RES, FXD, FILM:100 OHM, 1%, 0.125W, TC=TO	91637	CMF55116G100R0F
A11R607	321-0193-00			RES, FXD, FILM:1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A11R610	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R612	315-0750-00			RES, FXD, FILM:75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A11R620	311-2231-00			RES, VAR, NONWW: TRMR, 1K OHM, 20%, 0.5W LINEAR	TK1450	GF06UT 1K
A11R650	307-0446-00			RES NTWK, FXD, FI:10K OHM, 20%, (9)RES	11236	750-101-R10K
A11R670	315-0270-00	B010170	B010504	RES, FXD, FILM:27 OHM, 5%, 0.25W (STANDARD)	19701	5043CX27R00J
A11R690	321-0097-00			RES, FXD, FILM:100 OHM, 1%, 0.125W, TC=TO (NOMINAL VALUE)	91637	CMF55116G100R0F
A11R690	321-0100-00	B010284		RES, FXD, FILM:107 OHM, 1%, 0.125W, TC=TO	07716	CEAD107R0F
A11R690	321-0101-00	B010284		RES, FXD, FILM:110 OHM, 1%, 0.125W, TC=TO (TEST SELECTABLE)	07716	CEAD110R0F
A11R713	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R715	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R716	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R720	307-0446-00			RES NTWK, FXD, FI:10K OHM, 20%, (9)RES	11236	750-101-R10K
A11R721	307-0446-00			RES NTWK, FXD, FI:10K OHM, 20%, (9)RES	11236	750-101-R10K
A11R722	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A11R723	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R732	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A11R780	321-0085-00			RES, FXD, FILM:75 OHM, 1%, 0.125W, TC=TO	57668	CRB14FXE 75 OHM
A11R781	321-0143-00			RES, FXD, FILM:301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301R0F
A11R832	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R833	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R835	307-0677-00			RES NTWK, FXD, FI:4.56 OHM, 2%, 0.2W	01121	108B560
A11R841	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R842	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R843	315-0560-00			RES, FXD, FILM:56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A11R845	307-0677-00			RES NTWK, FXD, FI:4.56 OHM, 2%, 0.2W	01121	108B560
A11R880	321-0068-00			RES, FXD, FILM:49.9 OHM, 0.1%, 0.125W, TC=TO	91637	CMF55116G49R90F
A11R881	321-0143-00			RES, FXD, FILM:301 OHM, 1%, 0.125W, TC=TO (NOMINAL VALUE)	07716	CEAD301R0F
A11R881	321-0149-00	B010284		RES, FXD, FILM:348 OHM, 1%, 0.125W, TC=TO	07716	CEAD348R0F
A11R881	321-0152-00	B010284		RES, FXD, FILM:374 OHM, 1%, 0.125W, TC=TO (TEST SELECTABLE)	07716	CEAD374R0F
A11R884	321-0239-00			RES, FXD, FILM:3.01K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K010F
A11R891	321-0068-00	B010100	B010329	RES, FXD, FILM:49.9 OHM, 0.1%, 0.125W, TC=TO	91637	CMF55116G49R90F

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
		Effective	Discont		Code	
A11R891	322-3068-00	B010330		RES,FXD,FILM:49.9 OHM,1%,0.2W,TC=TO (STANDARD ONLY)	80009	322-3068-00
A11R891	322-3068-00			RES,FXD,FILM:49.9 OHM,1%,0.2W,TC=TO (2440M ONLY)	80009	322-3068-00
A11TP130	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP133	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP200	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP250	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP341	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP400	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP490	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP530	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP600	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP601	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP602	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP680	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP700	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11TP710	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11U130	156-0852-00			MICROCKT,DGTL:HEX DRVR W/3-STATE INPUT	01295	SN74LS367N
A11U140	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A11U141	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A11U142	156-1638-00			MICROCKT,LINER:10 BIT HS,MULT,D/A CONV	80009	156-1638-00
A11U170	156-1156-00			MICROCKT,LINER:BIFET,OPNL AMPL	80009	156-1156-00
A11U210	156-0530-00			MICROCKT,DGTL:QUAD 2-INP MUX	01295	SN74LS157N
A11U211	156-0422-00			MICROCKT,DGTL:UP/DOWN SYN BINARY COUNTER	18324	N74LS191(N OR F)
A11U212	156-0530-00			MICROCKT,DGTL:QUAD 2-INP MUX	01295	SN74LS157N
A11U220	156-0422-00			MICROCKT,DGTL:UP/DOWN SYN BINARY COUNTER	18324	N74LS191(N OR F)
A11U221	156-0530-00			MICROCKT,DGTL:QUAD 2-INP MUX	01295	SN74LS157N
A11U222	156-0422-00			MICROCKT,DGTL:UP/DOWN SYN BINARY COUNTER	18324	N74LS191(N OR F)
A11U223	156-0481-00			MICROCKT,DGTL:TRIPLE 3-INP AND GATE	80009	156-0481-00
A11U230	156-0994-02			MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A11U231	156-0844-00			MICROCKT,DGTL:SYN 4-BIT BIN CNTR	80009	156-0844-00
A11U232	160-2559-00			MICROCKT,DGTL:32 X 8 PROM,PRGM	80009	160-2559-00
A11U240	156-0852-00			MICROCKT,DGTL:HEX DRVR W/3-STATE INPUT	01295	SN74LS367N
A11U241	156-0982-03			MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	80009	156-0982-03
A11U243	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A11U250	156-1638-00			MICROCKT,LINER:10 BIT HS,MULT,D/A CONV	80009	156-1638-00
A11U270	156-0515-00			MICROCKT,DGTL:CMOS,TRIPLE 2-CHAN MUX	02735	CD4053BF
A11U280	156-2485-00			MICROCKT,LINER:OPERATIONAL AMPLIFIER,INPUT	80009	156-2485-00
A11U281	156-0742-00			MICROCKT,LINER:OPNL AMPL	01295	LM318P
A11U282	156-2485-00			MICROCKT,LINER:OPERATIONAL AMPLIFIER,INPUT	80009	156-2485-00
A11U290	156-0514-00			MICROCKT,DGTL:CMOS,DIFF 4-CHANNEL MUX	02735	CD4052BF-98
A11U300	156-1714-00			MICROCKT,DGTL:ASTTL,SYN UP/DOWN BIN COUNTER	07263	74F191 (PCQR)
A11U312	156-0386-00			MICROCKT,DGTL:TRIPLE 3-INP NAND GATE	01295	SN74LS10(N OR J)
A11U313	156-0452-00			MICROCKT,DGTL:4-WIDE,2-INP ADI	01295	SN74LS54(N OR J)
A11U314	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A11U320	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A11U321	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A11U322	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A11U323	156-0479-00			MICROCKT,DGTL:QUAD 2-INP OR GATE	80009	156-0479-00
A11U330	160-2560-00			MICROCKT,DGTL:32 X 8 PROM,PRGM	80009	160-2560-00
A11U340	156-0382-00			MICROCKT,DGTL:QUAD 2-INP NAND GATE	01295	SN74LS00(N OR J)
A11U350	156-0381-00			MICROCKT,DGTL:QUAD 2-INP ECXL OR GATE	01295	SN74LS86 N OR J
A11U370	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A11U392	156-1200-01			MICROCKT,LINER:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A11U400	156-1714-00			MICROCKT,DGTL:ASTTL,SYN UP/DOWN BIN COUNTER	07263	74F191 (PCQR)
A11U401	156-1714-00			MICROCKT,DGTL:ASTTL,SYN UP/DOWN BIN COUNTER	07263	74F191 (PCQR)
A11U410	156-0910-00			MICROCKT,DGTL:DUAL DECADE COUNTER	07263	SL68104

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A11U411	156-0386-00		MICROCKT,DGTL:TRIPLE 3-INP NAND GATE	01295	SN74LS10(N OR J)
A11U412	156-0382-00		MICROCKT,DGTL:QUAD 2-INP NAND GATE	01295	SN74LS00(N OR J)
A11U413	156-0385-00		MICROCKT,DGTL:HEX INVERTER	01295	SN74LS04 N OR J
A11U414	156-0388-00		MICROCKT,DGTL:DUAL D FLIP-FLOP	01295	SN74LS74 N OR J
A11U415	156-0388-00		MICROCKT,DGTL:DUAL D FLIP-FLOP	01295	SN74LS74 N OR J
A11U416	156-1172-00		MICROCKT,DGTL:DUAL 4 BIT BIN CNTR	80009	156-1172-00
A11U420	160-2558-00		MICROCKT,DGTL:4096 X 8 EPROM,PRGM	80009	160-2558-00
A11U421	156-0480-00		MICROCKT,DGTL:TTL,QUAD 2-INP AND GATE	80009	156-0480-00
A11U422	156-0479-00		MICROCKT,DGTL:QUAD 2-INP OR GATE	80009	156-0479-00
A11U423	156-1373-00		MICROCKT,DGTL:LSTTL,QUAD BUS BFR GATES	27014	DM74LS125 N OR J
A11U430	156-1228-00		MICROCKT,DGTL:NMOS,4096 X 1 SRAM	34335	AM2147-70DC
A11U431	156-2016-00		MICROCKT,DGTL:NMOS,2048 X 8 SRAM,100NS	TK1016	TMM2016AP-10
A11U440	156-1594-00		MICROCKT,DGTL:NMOS,2048 X 8 SRAM	65786	CY6116-55PC
A11U441	156-0982-03		MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	80009	156-0982-03
A11U442	156-0382-00		MICROCKT,DGTL:QUAD 2-INP NAND GATE	01295	SN74LS00(N OR J)
A11U450	156-0480-00		MICROCKT,DGTL:TTL,QUAD 2-INP AND GATE	80009	156-0480-00
A11U460	156-1200-01		MICROCKT,LINEAR:BIFET,QUAD OPNL AMPL,SCRN	80009	156-1200-01
A11U500	156-0382-00		MICROCKT,DGTL:QUAD 2-INP NAND GATE	01295	SN74LS00(N OR J)
A11U501	156-1909-00		MICROCKT,DGTL:QUAD 2 INP MULTIPLEXER	04713	74F157 ND OR JD
A11U502	156-0982-03		MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	80009	156-0982-03
A11U510	156-1611-00		MICROCKT,DGTL:ASTTL,DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A11U511	156-1611-00		MICROCKT,DGTL:ASTTL,DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A11U512	156-1724-00		MICROCKT,DGTL:F TTL,QUAD 2 INP OR GATE	04713	MC74F32ND
A11U513	156-1722-00		MICROCKT,DGTL:F TTL,HEX INVERTER	04713	MC74F04ND
A11U520	156-1611-00		MICROCKT,DGTL:ASTTL,DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A11U521	156-1611-00		MICROCKT,DGTL:ASTTL,DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A11U522	156-1724-00		MICROCKT,DGTL:F TTL,QUAD 2 INP OR GATE	04713	MC74F32ND
A11U523	156-0118-00		MICROCKT,DGTL:DUAL J-K FLIP-FLOP	01295	SN88792N
A11U530	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE, SCRN	80009	156-0913-02
A11U531	156-1277-00		MICROCKT,DGTL:LSTTL,3-STATE OCTAL BFR,SCRN	27014	DM81LS95ANA+
A11U532	156-1277-00		MICROCKT,DGTL:LSTTL,3-STATE OCTAL BFR,SCRN	27014	DM81LS95ANA+
A11U540	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A11U541	156-0865-00		MICROCKT,DGTL:OCTAL D FF W/CLR	80009	156-0865-00
A11U542	156-1277-00		MICROCKT,DGTL:LSTTL,3-STATE OCTAL BFR,SCRN	27014	DM81LS95ANA+
A11U550	156-0469-00		MICROCKT,DGTL:3-LINE TO 8-LINE DECODER	01295	SN74LS138N
A11U560	156-2800-00		MICROCKT,INTFC:BIPOLAR,A/D CONVERTER,8 BIT	80009	156-2800-00
A11U600	156-2000-00		MICROCKT,DGTL:MOS,2048 X 8 BIT SRAM	TK1016	TMM2018D-45
A11U601	156-0982-03		MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	80009	156-0982-03
A11U610	156-1111-02		MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A11U612	156-0118-00		MICROCKT,DGTL:DUAL J-K FLIP-FLOP	01295	SN88792N
A11U613	156-1962-00		MICROCKT,DGTL:OCTAL BUFFER/LINE DRIVER,SCRN	80009	156-1962-00
A11U615	156-0118-00		MICROCKT,DGTL:DUAL J-K FLIP-FLOP	01295	SN88792N
A11U620	156-1707-00		MICROCKT,DGTL:QUAD 2-INPUT NAND GATE,SCRN	80009	156-1707-00
A11U621	156-1935-00		MICROCKT,DGTL:SYNC PRESETTABLE BINARY CNTR	80009	156-1935-00
A11U622	156-1935-00		MICROCKT,DGTL:SYNC PRESETTABLE BINARY CNTR	80009	156-1935-00
A11U623	156-1663-00		MICROCKT,DGTL:ASTTL,TPL 3-INP & GATE	80009	156-1663-00
A11U624	156-1909-00		MICROCKT,DGTL:QUAD 2 INP MULTIPLEXER	04713	74F157 ND OR JD
A11U630	156-1704-00		MICROCKT,DGTL:ASTTL,OCTAL D TYPE FF	18324	74F374(NB OR FB)
A11U631	156-1704-00		MICROCKT,DGTL:ASTTL,OCTAL D TYPE FF	18324	74F374(NB OR FB)
A11U632	156-1704-00		MICROCKT,DGTL:ASTTL,OCTAL D TYPE FF	18324	74F374(NB OR FB)
A11U640	156-1704-00		MICROCKT,DGTL:ASTTL,OCTAL D TYPE FF	18324	74F374(NB OR FB)
A11U641	156-1111-02		MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A11U642	156-1961-00		MICROCKT,DGTL:BIDIRECTIONAL UNIV SHF RGTR	80009	156-1961-00
A11U650	156-1752-00		MICROCKT,DGTL:F TTL,TRIPLE 3 INP NAND GATE	04713	MC 74F10N
A11U651	156-0388-00		MICROCKT,DGTL:DUAL D FLIP-FLOP	01295	SN74LS74 N OR J
A11U670	156-3353-00	B010100	MICROCKT,DGTL:CMOS,SEMI CUSTOM,STD CELL	80009	156-3353-00
A11U670	156-3353-01	B010505	MICROCKT,DGTL:CMOS,SEMI CUSTOM,STD CELL (STANDARD)	80009	156-3353-01

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A11U670	156-3353-01		MICROCKT,DGTL:CMOS,SEMI CUSTOM,STD CELL (2440M)	80009	156-3353-01
A11U680	156-0956-00		MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A11U710	156-1973-00		MICROCKT,DGTL:STTL,QUAD D FF	80009	156-1973-00
A11U711	156-1800-00		MICROCKT,DGTL:ASTTL,QUAD 2 INP EXCL OR GATE	80009	156-1800-00
A11U712	156-1723-00		MICROCKT,DGTL:QUAD 2 INPUT & GATE	04713	MC74F08 ND OR JD
A11U720	156-1611-00		MICROCKT,DGTL:ASTTL,DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A11U721	156-1935-00		MICROCKT,DGTL:SYNC PRESETTABLE BINARY CNTR	80009	156-1935-00
A11U722	156-1662-00		MICROCKT,DGTL:ASTTL,DUAL 4 INP MUX	04713	MC74F153 ND/JD
A11U730	156-1961-00		MICROCKT,DGTL:BIDIRECTIONAL UNIV SHF RGTR	80009	156-1961-00
A11U731	156-1723-00		MICROCKT,DGTL:QUAD 2 INPUT & GATE	04713	MC74F08 ND OR JD
A11U732	156-1041-02		MICROCKT,DGTL:STTL,4 BIT MAGNITUDE COMPTR	01295	SN74S85NP3
A11U740	156-1041-02		MICROCKT,DGTL:STTL,4 BIT MAGNITUDE COMPTR	01295	SN74S85NP3
A11U750	156-0651-00		MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-00
A11U780	156-2804-00		MICROCKT,LINER:OP AMP,WIDEBAND,H SLEW RATE	80009	156-2804-00
A11U830	156-1961-00		MICROCKT,DGTL:BIDIRECTIONAL UNIV SHF RGTR	80009	156-1961-00
A11U831	156-1961-00		MICROCKT,DGTL:BIDIRECTIONAL UNIV SHF RGTR	80009	156-1961-00
A11U832	156-1722-00		MICROCKT,DGTL:FTTL,HEX INVERTER	04713	MC74F04ND
A11U833	156-1961-00		MICROCKT,DGTL:BIDIRECTIONAL UNIV SHF RGTR	80009	156-1961-00
A11U834	156-1724-00		MICROCKT,DGTL:FTTL,QUAD 2 INP OR GATE	04713	MC74F32ND
A11U835	156-1722-00		MICROCKT,DGTL:FTTL,HEX INVERTER	04713	MC74F04ND
A11U880	156-1149-00		MICROCKT,LINER:OPERATIONAL AMP,JFET INPUT	27014	LF351N/GLEA134
A11W140	175-9026-00		CA ASSY,SP,ELEC:50,28 AWG,6.5 L	80009	175-9026-00
A11W780	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A11Y611	119-2430-00		OSCILLATOR,RF:XSTL CONT,40MHZ,0.001%	01537	K1144 AM-40MHZ

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A12	670-9746-17		CIRCUIT BD ASSY:PROCESSOR (STANDARD ONLY)	80009	670-9746-17
A12	670-9746-25		CIRCUIT BD ASSY:PROCESSOR (OPTION 05 ONLY)	80009	670-9746-25
A12BT800	146-0062-01		BATTERY, PRIMARY:3.5V, 1.6AH, LITHIUM	80009	146-0062-01
A12C104	281-0763-00		CAP, FXD, CER DI:47PF, 10%, 100V	04222	MA101A470KAA
A12C105	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C107	281-0763-00		CAP, FXD, CER DI:47PF, 10%, 100V	04222	MA101A470KAA
A12C120	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C130	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C132	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C150	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C202	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C204	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C206	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V (OPTION 05 ONLY)	54583	MA12X7R1H223M-T
A12C217	281-0773-00		CAP, FXD, CER DI:0.01UF, 10%, 100V (OPTION 05 ONLY)	04222	MA201C103KAA
A12C218	281-0775-00		CAP, FXD, CER DI:0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C238	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C276	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C308	281-0785-00		CAP, FXD, CER DI:68PF, 10%, 100V (OPTION 05 ONLY)	04222	MA101A680KAA
A12C322	290-0183-00		CAP, FXD, ELCTLT:1UF, 10%, 35V (OPTION 05 ONLY)	05397	T3228105K035AS
A12C324	281-0861-00		CAP, FXD, CER DI:270PF, 5%, 50V (OPTION 05 ONLY)	04222	SA101A271JAA
A12C325	281-0820-00		CAP, FXD, CER DI:680 PF, 10%, 50V (OPTION 05 ONLY)	04222	SA101C681KAA
A12C328	281-0813-00		CAP, FXD, CER DI:0.047UF, 20%, 50V (OPTION 05 ONLY)	05397	C412C473M5V2CA
A12C330	281-0812-00		CAP, FXD, CER DI:1000PF, 10%, 100V (OPTION 05 ONLY)	04222	MA101C102KAA
A12C332	281-0814-00		CAP, FXD, CER DI:100 PF, 10%, 100V (OPTION 05 ONLY)	04222	MA101A101KAA
A12C336	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C342	281-0757-00		CAP, FXD, CER DI:10PF, 20%, 100V TUBULAR, MI	04222	MA101A100MAA
A12C344	283-0107-00		CAP, FXD, CER DI:51PF, 5%, 200V	04222	SR206A510JAA
A12C348	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C358	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C360	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C366	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C370	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C372	283-0051-00		CAP, FXD, CER DI:0.0033UF, 5%, 100V	04222	SR301A332JAA
A12C374	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C386	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C402	281-0775-00		CAP, FXD, CER DI:0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C414	281-0863-00		CAP, FXD, CER DI:240PF, 5%, 100V (OPTION 05 ONLY)	04222	SA101A241JAA
A12C416	281-0792-00		CAP, FXD, CER DI:82PF, 10%, 100V (OPTION 05 ONLY)	04222	SA102A820KAA
A12C418	281-0775-00		CAP, FXD, CER DI:0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C424	281-0775-00		CAP, FXD, CER DI:0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C426	290-0183-00		CAP, FXD, ELCTLT:1UF, 10%, 35V (OPTION 05 ONLY)	05397	T3228105K035AS
A12C452	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A12C462	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C464	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C466	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C472	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C474	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C484	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C510	281-0814-00			CAP, FXD, CER DI: 100 PF, 10%, 100V (OPTION 05 ONLY)	04222	MA101A101KAA
A12C512	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C514	281-0786-00			CAP, FXD, CER DI: 150PF, 10%, 100V (OPTION 05 ONLY)	04222	MA101A151KAA
A12C520	281-0773-00			CAP, FXD, CER DI: 0.01UF, 10%, 100V (OPTION 05 ONLY)	04222	MA201C103KAA
A12C522	281-0826-00			CAP, FXD, CER DI: 2200PF, 10%, 100V (OPTION 05 ONLY)	20932	401EM100AD222K
A12C526	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C528	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V (OPTION 05 ONLY)	54583	MA12X7R1H223M-T
A12C532	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C542	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C550	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C572	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C580	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C582	290-0943-02			CAP, FXD, ELCTLT: 47UF, 20%, 25V	55680	UVX1E470MAA1TD
A12C586	281-0814-00			CAP, FXD, CER DI: 100 PF, 10%, 100V	04222	MA101A101KAA
A12C590	290-0943-02			CAP, FXD, ELCTLT: 47UF, 20%, 25V	55680	UVX1E470MAA1TD
A12C592	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C606	281-0788-00			CAP, FXD, CER DI: 470PF, 10%, 100V (OPTION 05 ONLY)	04222	SA102C471KAA
A12C608	281-0814-00			CAP, FXD, CER DI: 100 PF, 10%, 100V (OPTION 05 ONLY)	04222	MA101A101KAA
A12C609	281-0863-00			CAP, FXD, CER DI: 240PF, 5%, 100V (OPTION 05 ONLY)	04222	SA101A241JAA
A12C612	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C620	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C622	290-0246-00			CAP, FXD, ELCTLT: 3.3UF, 10%, 15V (OPTION 05 ONLY)	12954	D3R3EA15K1
A12C624	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C626	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C646	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C670	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C712	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C713	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C714	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C716	290-0808-00			CAP, FXD, ELCTLT: 2.7UF, 10%, 20V (OPTION 05 ONLY)	05397	T322B275K02DAS
A12C719	281-0775-00			CAP, FXD, CER DI: 0.1UF, 20%, 50V (OPTION 05 ONLY)	04222	MA205E104MAA
A12C720	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C748	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C764	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C766	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C774	281-0909-00			CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A12C780	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C790	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C850	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C862	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C882	290-0943-02		CAP, FXD, ELCTLT: 47UF, 20%, 25V	55680	UVX1E470MAA1TD
A12C884	290-0943-02		CAP, FXD, ELCTLT: 47UF, 20%, 25V	55680	UVX1E470MAA1TD
A12C886	290-0943-02		CAP, FXD, ELCTLT: 47UF, 20%, 25V	55680	UVX1E470MAA1TD
A12C894	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C904	290-0943-02		CAP, FXD, ELCTLT: 47UF, 20%, 25V	55680	UVX1E470MAA1TD
A12C936	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12C938	290-0748-00		CAP, FXD, ELCTLT: 10UF, +50-20%, 25WVDC	54473	ECE-BIEV100S
A12C944	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A12C948	281-0757-00		CAP, FXD, CER DI: 10PF, 20%, 100V TUBULAR, MI	04222	MA101A100MAA
A12C950	283-0107-00		CAP, FXD, CER DI: 51PF, 5%, 200V	04222	SR206A510JAA
A12C964	290-0943-02		CAP, FXD, ELCTLT: 47UF, 20%, 25V	55680	UVX1E470MAA1TD
A12C980	281-0909-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A12CR104	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A12CR107	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A12CR120	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A12CR122	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A12CR224	152-0951-00		SEMICON DVC, DI: SCHOTTKY, SI, 60V, 2.25PF (OPTION 05 ONLY)	80009	152-0951-00
A12CR244	152-0951-00		SEMICON DVC, DI: SCHOTTKY, SI, 60V, 2.25PF	80009	152-0951-00
A12CR324	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR325	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR326	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR328	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR329	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR332	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR334	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR336	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR422	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR502	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR510	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR512	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR526	152-0460-00		SEMICON DVC, DI: FE, SI, 25V, 1MA, TO-7 (OPTION 05 ONLY)	04713	SCL072
A12CR594	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A12CR596	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A12CR606	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR612	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 05 ONLY)	03508	DA2527 (1N4152)
A12CR620	152-0460-00		SEMICON DVC, DI: FE, SI, 25V, 1MA, TO-7 (OPTION 05 ONLY)	04713	SCL072
A12CR701	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A12CR702	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A12CR715	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
				(OPTION 05 ONLY)		
A12CR722	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A12CR802	152-0951-00			SEMICON DVC,DI:SCHOTTKY,SI,60V,2.25PF	80009	152-0951-00
A12CR806	152-0951-00			SEMICON DVC,DI:SCHOTTKY,SI,60V,2.25PF	80009	152-0951-00
A12CR900	152-0951-00			SEMICON DVC,DI:SCHOTTKY,SI,60V,2.25PF	80009	152-0951-00
A12CR902	152-0951-00			SEMICON DVC,DI:SCHOTTKY,SI,60V,2.25PF	80009	152-0951-00
A12CR944	152-0951-00			SEMICON DVC,DI:SCHOTTKY,SI,60V,2.25PF	80009	152-0951-00
A12CR992	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A12DL580	119-1804-00			DELAY LINE,ELEC:10NS,100 OHM,3 SIP	56289	62Z03A010H
A12J103	131-3182-00			CONN,RCPT,ELEC:HDR,RTANG,2 X 25,0.1 CENTER	22526	75867-008
A12J120	131-3181-00			CONN,RCPT,ELEC:HEADER,RTANG,2 X 20,0.1 CTR	22526	75867-007
A12J123	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 8)		
				(OPTION 05 ONLY)		
A12J124	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 4)		
A12J125	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 15)		
A12J126	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 3)		
A12J127	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 4)		
A12J128	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 2)		
A12J129	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 2)		
A12J181	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 24)		
A12J184	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 2)		
A12J207	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 4)		
A12J790	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
				(QUANTITY OF 5)		
A12L976	108-0538-00			COIL,RF:FIXED,2.7UH	76493	JWM#B7059
A12L984	108-0538-00			COIL,RF:FIXED,2.7UH	76493	JWM#B7059
A12L990	108-0538-00			COIL,RF:FIXED,2.7UH	76493	JWM#B7059
A12L992	108-0538-00			COIL,RF:FIXED,2.7UH	76493	JWM#B7059
A12LS498	119-1427-01			XDCR,AUDIO:1-4,2KHZ,30MA,6V	TK1066	QMB-06
A12P126	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A12P127	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A12P128	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A12P184	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A12Q104	151-0223-00			TRANSISTOR:NPN,SI,625MW,TO-92	80009	151-0223-00
A12Q107	151-0223-00			TRANSISTOR:NPN,SI,625MW,TO-92	80009	151-0223-00
A12Q244	151-0223-00			TRANSISTOR:NPN,SI,625MW,TO-92	80009	151-0223-00
A12Q330	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
				(OPTION 05 ONLY)		
A12Q332	151-0223-00			TRANSISTOR:NPN,SI,625MW,TO-92	80009	151-0223-00
A12Q419	151-1059-00			TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESCR
				(OPTION 05 ONLY)		
A12Q420	151-1059-00			TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESCR
				(OPTION 05 ONLY)		
A12Q422	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
				(OPTION 05 ONLY)		
A12Q502	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
				(OPTION 05 ONLY)		
A12Q504	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
				(OPTION 05 ONLY)		
A12Q510	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
				(OPTION 05 ONLY)		

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A12Q512	151-0188-00		TRANSISTOR:PNP,SI,TO-92 (OPTION 05 ONLY)	80009	151-0188-00
A12Q514	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE (OPTION 05 ONLY)	04713	ORDER BY DESCR
A12Q588	151-0188-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A12Q592	151-0254-03		TRANSISTOR:DARLINGTON,NPN,SI	TK1016	MPSA14, TPE2
A12Q594	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A12Q596	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A12Q612	151-0188-00		TRANSISTOR:PNP,SI,TO-92 (OPTION 05 ONLY)	80009	151-0188-00
A12Q710	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE (OPTION 05 ONLY)	04713	ORDER BY DESCR
A12Q720	151-0223-00		TRANSISTOR:NPN,SI,625MW,TO-92	80009	151-0223-00
A12Q804	151-0622-00		TRANSISTOR:NPN,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A12Q806	151-0192-05		TRANSISTOR:NPN,SI,TO-92	04713	ORDER BY DESCR
A12Q842	151-0223-00		TRANSISTOR:NPN,SI,625MW,TO-92	80009	151-0223-00
A12Q960	151-0223-00		TRANSISTOR:NPN,SI,625MW,TO-92	80009	151-0223-00
A12R102	315-0621-00		RES,FXD,FILM:620 OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E620E
A12R103	313-1181-00		RES,FXD,FILM:180 OHM,5%0.2W	57668	TR20JE180E
A12R104	313-1470-00		RES,FXD,FILM:47 OHM,5%,0.2W	57668	TR20JE 47E
A12R105	313-1390-00		RES,FXD,FILM:39 OHM,5%,0.2W	57668	TR20JE 39E
A12R106	313-1181-00		RES,FXD,FILM:180 OHM,5%0.2W	57668	TR20JE180E
A12R107	313-1470-00		RES,FXD,FILM:47 OHM,5%,0.2W	57668	TR20JE 47E
A12R108	313-1102-00		RES,FXD,FILM:1K OHM,5%,0.2W	57668	TR20JE01K0
A12R120	313-1103-00		RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A12R122	313-1470-00		RES,FXD,FILM:47 OHM,5%,0.2W	57668	TR20JE 47E
A12R208	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0
A12R210	315-0123-00		RES,FXD,FILM:12K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E12K0
A12R212	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0
A12R214	315-0683-00		RES,FXD,FILM:68K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E68K0
A12R218	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E 100E
A12R224	315-0393-00		RES,FXD,FILM:39K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E39K0
A12R226	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E100K
A12R228	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0
A12R234	315-0751-00		RES,FXD,FILM:750 OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E750E
A12R244	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A12R246	313-1103-00		RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A12R274	313-1153-00		RES,FXD,FILM:15K,5%,0.2W	57668	TR20JE15K0
A12R276	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A12R300	313-1102-00		RES,FXD,FILM:1K OHM,5%,0.2W	57668	TR20JE01K0
A12R308	315-0162-00		RES,FXD,FILM:1.6K OHM,5%,0.25W (OPTION 05 ONLY)	19701	5043CX1K600J
A12R314	315-0474-00		RES,FXD,FILM:470K OHM,5%,0.25W (OPTION 05 ONLY)	19701	5043CX470K0J92U
A12R320	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E 2K
A12R321	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W (OPTION 05 ONLY)	57668	NTR25J-E02K2
A12R322	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W (OPTION 05 ONLY)	19701	5043CX10K00J
A12R323	315-0514-00		RES,FXD,FILM:510K OHM,5%,0.25W	19701	5043CX510K0J

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A12R324	315-0123-00			(OPTION 05 ONLY) RES, FXD, FILM: 12K OHM, 5%, 0.25W	57668	NTR25J-E12K0
A12R325	315-0154-00			(OPTION 05 ONLY) RES, FXD, FILM: 150K OHM, 5%, 0.25W	57668	NTR25J-E150K
A12R326	315-0563-00			(OPTION 05 ONLY) RES, FXD, FILM: 56K OHM, 5%, 0.25W	19701	5043CX56K00J
A12R327	315-0472-00			(OPTION 05 ONLY) RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A12R328	315-0203-00			(OPTION 05 ONLY) RES, FXD, FILM: 20K OHM, 5%, 0.25W	57668	NTR25J-E 20K
A12R329	315-0824-00			(OPTION 05 ONLY) RES, FXD, FILM: 820K OHM, 5%, 0.25W	19701	5043CX820K0J
A12R330	315-0683-00			(OPTION 05 ONLY) RES, FXD, FILM: 68K OHM, 5%, 0.25W	57668	NTR25J-E68K0
A12R332	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R334	315-0272-00			(OPTION 05 ONLY) RES, FXD, FILM: 2.7K OHM, 5%, 0.25W	57668	NTR25J-E02K7
A12R335	315-0333-00			(OPTION 05 ONLY) RES, FXD, FILM: 33K OHM, 5%, 0.25W	57668	NTR25J-E33K0
A12R338	315-0103-00			(OPTION 05 ONLY) RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R342	313-1103-00			(OPTION 05 ONLY) RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A12R344	321-0222-00			RES, FXD, FILM: 2.00K OHM, 1%, 0.125W, TC=TO	19701	5033ED2K00F
A12R346	321-0193-00			RES, FXD, FILM: 1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A12R348	321-0222-00			RES, FXD, FILM: 2.00K OHM, 1%, 0.125W, TC=TO	19701	5033ED2K00F
A12R349	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A12R370	313-1201-00			RES, FXD, FILM: 200 OHM, 5%, 0.2W	57668	TR20JE200E
A12R374	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A12R376	315-0201-00			RES, FXD, FILM: 200 OHM, 5%, 0.25W	57668	NTR25J-E200E
A12R378	313-1103-00			RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A12R401	307-0104-00			RES, FXD, CMPSN: 3.3 OHM, 5%, 0.25W	01121	CB3365
A12R402	315-0223-00			(OPTION 05 ONLY) RES, FXD, FILM: 22K OHM, 5%, 0.25W	19701	5043CX22K00J92U
A12R403	315-0332-00			(OPTION 05 ONLY) RES, FXD, FILM: 3.3K OHM, 5%, 0.25W	57668	NTR25J-E03K3
A12R404	315-0471-00			(OPTION 05 ONLY) RES, FXD, FILM: 470 OHM, 5%, 0.25W	57668	NTR25J-E470E
A12R405	315-0182-00			(OPTION 05 ONLY) RES, FXD, FILM: 1.8K OHM, 5%, 0.25W	57668	NTR25J-E1K8
A12R406	315-0911-00			(OPTION 05 ONLY) RES, FXD, FILM: 910 OHM, 5%, 0.25W	57668	NTR25J-E910E
A12R407	315-0123-00			(OPTION 05 ONLY) RES, FXD, FILM: 12K OHM, 5%, 0.25W	57668	NTR25J-E12K0
A12R408	315-0512-00			(OPTION 05 ONLY) RES, FXD, FILM: 5.1K OHM, 5%, 0.25W	57668	NTR25J-E05K1
A12R409	315-0112-00			(OPTION 05 ONLY) RES, FXD, FILM: 1.1K OHM, 5%, 0.25W	19701	5043CX1K100J
A12R410	315-0243-00			(OPTION 05 ONLY) RES, FXD, FILM: 24K OHM, 5%, 0.25W	57668	NTR25J-E24K0
A12R411	315-0243-00			(OPTION 05 ONLY) RES, FXD, FILM: 24K OHM, 5%, 0.25W	57668	NTR25J-E24K0
A12R412	315-0104-00			(OPTION 05 ONLY) RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A12R413	315-0104-00			(OPTION 05 ONLY) RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A12R414	315-0103-00			(OPTION 05 ONLY) RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R415	315-0273-00			(OPTION 05 ONLY) RES, FXD, FILM: 27K OHM, 5%, 0.25W	57668	NTR25J-E27K0
A12R416	315-0104-00			(OPTION 05 ONLY) RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A12R417	315-0103-00			(OPTION 05 ONLY) RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R418	315-0391-00			(OPTION 05 ONLY) RES, FXD, FILM:390 OHM, 5%, 0.25W	57668	NTR25J-E390E
A12R419	311-2100-00			(OPTION 05 ONLY) RES, VAR, NONWV:TRMR, 1K OHM, 10%, 0.5W	32997	3386M-T07-102
A12R420	315-0104-00			(OPTION 05 ONLY) RES, FXD, FILM:100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A12R421	315-0103-00			(OPTION 05 ONLY) RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R422	315-0392-00			(OPTION 05 ONLY) RES, FXD, FILM:3.9K OHM, 5%, 0.25W	57668	NTR25J-E03K9
A12R423	315-0102-00			(OPTION 05 ONLY) RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A12R424	315-0103-00			(OPTION 05 ONLY) RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R425	315-0103-00			(OPTION 05 ONLY) RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R426	315-0203-00			(OPTION 05 ONLY) RES, FXD, FILM:20K OHM, 5%, 0.25W	57668	NTR25J-E 20K
A12R427	315-0163-00			(OPTION 05 ONLY) RES, FXD, FILM:16K OHM, 5%, 0.25W	57668	NTR25J-E 16K
A12R428	315-0334-00			(OPTION 05 ONLY) RES, FXD, FILM:330K OHM, 5%, 0.25W	57668	NTR25J-E 330K
A12R429	315-0204-00			(OPTION 05 ONLY) RES, FXD, FILM:200K OHM, 5%, 0.25W	19701	5043CX200K0J
A12R474	307-0446-00			RES NTWK, FXD, FI:10K OHM, 20%, (9)RES	11236	750-101-R10K
A12R479	315-0103-00			RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R502	315-0102-00			RES, FXD, FILM:1K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0
A12R506	315-0432-00			RES, FXD, FILM:4.3K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E04K3
A12R512	315-0333-00			RES, FXD, FILM:33K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E33K0
A12R524	315-0511-00			RES, FXD, FILM:510 OHM, 5%, 0.25W (OPTION 05 ONLY)	19701	5043CX510R0J
A12R529	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E 100E
A12R572	313-1103-00			RES, FXD, FILM:10K OHM, 5%, 0.2W	57668	TR20JE10K0
A12R580	313-1241-00			RES, FXD, FILM:240 OHM, 5%, 0.2W	57668	TR20JE 240E
A12R582	315-0241-00			RES, FXD, FILM:240 OHM, 5%, 0.25W	19701	5043CX240R0J
A12R584	315-0101-00			RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A12R590	307-0446-00			RES NTWK, FXD, FI:10K OHM, 20%, (9)RES	11236	750-101-R10K
A12R592	313-1102-00			RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R594	313-1472-00			RES, FXD, FILM:4.7K OHM, 5%, 0.2W	57668	TR20JE 04K7
A12R596	313-1103-00			RES, FXD, FILM:10K OHM, 5%, 0.2W	57668	TR20JE10K0
A12R597	313-1102-00			RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R598	313-1512-00			RES, FXD, FILM:5.1K OHM, 5%, 0.2W	57668	TR20JE 5K1
A12R602	315-0122-00			RES, FXD, FILM:1.2K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E01K2
A12R603	315-0392-00			RES, FXD, FILM:3.9K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E03K9
A12R604	315-0472-00			RES, FXD, FILM:4.7K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E04K7
A12R606	315-0303-00			RES, FXD, FILM:30K OHM, 5%, 0.25W (OPTION 05 ONLY)	19701	5043CX30K00J
A12R607	315-0102-00			RES, FXD, FILM:1K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0
A12R608	315-0102-00			RES, FXD, FILM:1K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A12R609	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0
A12R610	315-0475-00		RES, FXD, FILM:4.7M OHM, 5%, 0.25W (OPTION 05 ONLY)	01121	CB4755
A12R611	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W (OPTION 05 ONLY)	19701	5043CX10K00J
A12R612	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W (OPTION 05 ONLY)	19701	5043CX10K00J
A12R613	315-0201-00		RES, FXD, FILM:200 OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E200E
A12R614	315-0471-00		RES, FXD, FILM:470 OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E470E
A12R616	315-0470-00		RES, FXD, FILM:47 OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E47E0
A12R617	315-0222-00		RES, FXD, FILM:2.2K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E02K2
A12R622	321-0226-00		RES, FXD, FILM:2.21K OHM, 1%, 0.125W, TC=TO (OPTION 05 ONLY)	01121	RNK2211F
A12R624	315-0100-00		RES, FXD, FILM:10 OHM, 5%, 0.25W (OPTION 05 ONLY)	19701	5043CX10RR00J
A12R626	315-0101-00		RES, FXD, FILM:100 OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E 100E
A12R628	313-1102-00		RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R646	313-1102-00		RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R648	313-1102-00		RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R700	321-0251-00		RES, FXD, FILM:4.02K OHM, 1%, 0.125W, TC=TO (OPTION 05 ONLY)	19701	5033ED4KD20F
A12R701	313-1102-00		RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R711	315-0475-00		RES, FXD, FILM:4.7M OHM, 5%, 0.25W (OPTION 05 ONLY)	01121	CB4755
A12R712	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0
A12R713	315-0564-00		RES, FXD, FILM:560K OHM, 5%, 0.25W (OPTION 05 ONLY)	19701	5043CX560K0J
A12R714	315-0394-00		RES, FXD, FILM:390K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E390K
A12R715	315-0392-00		RES, FXD, FILM:3.9K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25J-E03K9
A12R716	315-0620-00		RES, FXD, FILM:62 OHM, 5%, 0.25W	19701	5043CX63R00J
A12R717	313-1181-00		RES, FXD, FILM:180 OHM, 5%, 0.2W	57668	TR20JE180E
A12R718	313-1470-00		RES, FXD, FILM:47 OHM, 5%, 0.2W	57668	TR20JE 47E
A12R719	315-0100-00		RES, FXD, FILM:10 OHM, 5%, 0.25W (OPTION 05 ONLY)	19701	5043CX10RR00J
A12R722	313-1102-00		RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R742	307-0446-00		RES NTWK, FXD, FI:10K OHM, 20%, (9)RES	11236	750-101-R10K
A12R744	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R746	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A12R748	313-1102-00		RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R764	313-1102-00		RES, FXD, FILM:1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R792	313-1151-00		RES, FXD, FILM:150 OHM, 5%, 0.2W	57668	TR20JE150E
A12R794	313-1151-00		RES, FXD, FILM:150 OHM, 5%, 0.2W	57668	TR20JE150E
A12R796	313-1151-00		RES, FXD, FILM:150 OHM, 5%, 0.2W	57668	TR20JE150E
A12R800	313-1561-00		RES, FXD, FILM:560 OHM, 5%, 0.2W	57668	TR20JE 560E
A12R802	315-0106-00		RES, FXD, FILM:10M OHM, 5%, 0.25W	01121	CB1065
A12R810	315-0121-00		RES, FXD, FILM:120 OHM, 5%, 0.25W (OPTION 05 ONLY)	19701	5043CX120R0J
A12R812	322-3235-00		RES, FXD, FILM:2.74K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 2K74
A12R814	313-1512-00		RES, FXD, FILM:5.1K OHM, 5%, 0.2W	57668	TR20JE 5K1
A12R816	315-0102-00		RES, FXD, FILM:1K OHM, 5%, 0.25W (OPTION 05 ONLY)	57668	NTR25JE01K0
A12R820	313-1560-00		RES, FXD, FILM:56 OHM, 5%, 0.2W	57668	TR20JE 56E

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A12R822	313-1560-00			RES, FXD, FILM: 56 OHM, 5%, 0.2W	57668	TR20JE 56E
A12R830	307-0675-00			RES NTKW, FXD, FI: 9, 1K OHM, 2% 1.25W	11236	750-101-R1K OHM
A12R894	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R896	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R900	313-1103-00			RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A12R936	313-1204-00			RES, FXD, FILM: 200K, 5%, 0.2W	57668	TR20JE 200K
A12R940	313-1103-00			RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A12R941	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12R945	313-1472-00			RES, FXD, FILM: 4.7K OHM, 5%, 0.2W	57668	TR20JE 04K7
A12R946	313-1103-00			RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A12R948	313-1183-00			RES, FXD, FILM: 18K OHM, 5%, 0.2W	57668	TR20JT68 18K
A12R952	322-3222-00			RES, FXD, FILM: 2K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 2K00
A12R954	322-3193-00			RES, FXD, FILM: 1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A12R956	322-3222-00			RES, FXD, FILM: 2K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 2K00
A12R957	313-1102-00			RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A12TP332	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP370	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP371	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP372	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP373	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP374	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP375	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP378	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP562	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP574	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP576	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP578	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP580	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP664	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP774	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP820	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP840	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP842	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12TP902	131-0608-00			TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A12U120	156-1962-00			MICROCKT, DGTL: OCTAL BUFFER/LINE DRIVER, SCRNB	80009	156-1962-00
A12U130	156-1800-00			MICROCKT, DGTL: ASTTL, QUAD 2 INP EXCL OR GATE	80009	156-1800-00
A12U132	156-1724-00			MICROCKT, DGTL: FTTL, QUAD 2 INP OR GATE	04713	MC74F32ND
A12U220	156-0366-00			MICROCKT, DGTL: DUAL D FLIP-FLOP (OPTION 05 ONLY)	02735	CD4013BF
A12U250	156-0739-00			MICROCKT, DGTL: TTL, QUAD 2 INP OR GATE	80009	156-0739-00
A12U254	156-0323-00			MICROCKT, DGTL: HEX INVERTER	01295	SN74S04N
A12U260	156-1220-01			MICROCKT, DGTL: HEX BUS DRIVER, SCREENED	01295	SN74LS365NP3
A12U262	156-1220-01			MICROCKT, DGTL: HEX BUS DRIVER, SCREENED	01295	SN74LS365NP3
A12U264	156-0739-00			MICROCKT, DGTL: TTL, QUAD 2 INP OR GATE	80009	156-0739-00
A12U270	156-0323-00			MICROCKT, DGTL: HEX INVERTER	01295	SN74S04N
A12U274	156-0402-00			MICROCKT, LINEAR: TIMER	27014	LM555CN
A12U276	156-1663-00			MICROCKT, DGTL: ASTTL, TPL 3-INP & GATE	80009	156-1663-00
A12U308	156-0575-00			MICROCKT, DGTL: 3-INPUT NOR GATE (OPTION 05 ONLY)	04713	MC14025BCL
A12U310	156-0366-00			MICROCKT, DGTL: DUAL D FLIP-FLOP (OPTION 05 ONLY)	02735	CD4013BF
A12U314	156-0704-00			MICROCKT, LINEAR: CMOS, PHASE LOCK LOOP (OPTION 05 ONLY)	04713	MC14046CP
A12U332	156-0479-00			MICROCKT, DGTL: QUAD 2-INP OR GATE	80009	156-0479-00
A12U350	156-3103-00			MICROCKT, DGTL: CMOS, 32768 X 8 SRAM	80009	156-3103-00
A12U352	156-1725-00			MICROCKT, DGTL: FTTL, OCTAL BIDIRECTIONAL XCVR	04713	MC74F245ND
A12U360	156-1725-00			MICROCKT, DGTL: FTTL, OCTAL BIDIRECTIONAL XCVR	04713	MC74F245ND
A12U364	156-1721-00			MICROCKT, DGTL: ASTTL, OCTAL TRANSPARENT LATCH	04713	MC74F373ND

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A12U366	156-1662-00			MICROCKT,DGTL:ASTTL,DUAL 4 INP MUX	04713	MC74F153 ND/JD
A12U410	156-1381-00			MICROCKT,LINER:3 NPN,2 PNP,XSTR ARRAY (OPTION 05 ONLY)	02735	CA3096AE-17
A12U420	156-1381-00			MICROCKT,LINER:3 NPN,2 PNP,XSTR ARRAY (OPTION 05 ONLY)	02735	CA3096AE-17
A12U424	156-0385-00			MICROCKT,DGTL:HEX INVERTER	01295	SN74LS04 N OR J
A12U430	156-0366-00			MICROCKT,DGTL:DUAL D FLIP-FLOP (OPTION 05 ONLY)	02735	CD4013BF
A12U432	156-0459-00			MICROCKT,DGTL:STTL,QUAD 2 INP AND GATE	01295	SN74S08(N OR J)
A12U440	156-2274-00			MICROCKT,DGTL:CMOS,8192 X 8 SRAM	62786	HMG264LP-12
A12U470	156-2380-00			MICROCKT,DGTL:CUSTOM WAVEFORM PROCESSOR	80009	156-2380-00
A12U480	160-4946-00	B010100	B010662	MICROCKT,DGTL:8192 X 8 PROM,PRGM	80009	160-4946-00
A12U480	160-4946-01	B010663		MICROCKT,DGTL:8192 X 8 EPROM,PRGM (STANDARD)	80009	160-4946-01
A12U480	160-4946-01			MICROCKT,DGTL:8192 X 8 EPROM,PRGM (2440M)	80009	160-4946-01
A12U490	160-4947-00	B010100	B010662	MICROCKT,DGTL:8192 X 8 PROM,PRGM	80009	160-4947-00
A12U490	160-4947-01	B010663		MICROCKT,DGTL:8192 X 8 EPROM,PRGM (STANDARD)	80009	160-4947-01
A12U490	160-4947-01			MICROCKT,DGTL:8192 X 8 EPROM,PRGM (2440M)	80009	160-4947-01
A12U504	156-0912-01			MICROCKT,LINER:OPNL AMPL,SCREENED (OPTION 05 ONLY)	02735	CA3080EX-98
A12U510	156-0912-01			MICROCKT,LINER:OPNL AMPL,SCREENED (OPTION 05 ONLY)	02735	CA3080EX-98
A12U514	156-0912-01			MICROCKT,LINER:OPNL AMPL,SCREENED (OPTION 05 ONLY)	02735	CA3080EX-98
A12U520	156-0912-01			MICROCKT,LINER:OPNL AMPL,SCREENED (OPTION 05 ONLY)	02735	CA3080EX-98
A12U524	156-0388-00			MICROCKT,DGTL:DUAL D FLIP-FLOP (OPTION 05 ONLY)	01295	SN74LS74 N OR J
A12U530	156-1426-00			MICROCKT,DGTL:NMOS,PROGRAMMABLE TIMER MDL (OPTION 05 ONLY)	04713	MC68B40 (L OR P)
A12U532	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A12U540	156-0469-00			MICROCKT,DGTL:3-LINE TO 8-LINE DECODER	01295	SN74LS138N
A12U541	156-0382-00			MICROCKT,DGTL:QUAD 2-INP NAND GATE (OPTION 05 ONLY)	01295	SN74LS00(N OR J)
A12U542	156-1962-00			MICROCKT,DGTL:OCTAL BUFFER/LINE DRIVER,SCRN	80009	156-1962-00
A12U550	156-1326-00			MICROCKT,DGTL:LSTTL,QUAD D TYPE FF,SCRN	01295	SN74LS379 N3
A12U552	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A12U560	156-1962-00			MICROCKT,DGTL:OCTAL BUFFER/LINE DRIVER,SCRN	80009	156-1962-00
A12U562	156-1721-00			MICROCKT,DGTL:ASTTL,OCTAL TRANSPARENT LATCH	04713	MC74F373ND
A12U564	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A12U570	156-0694-00			MICROCKT,DGTL:DECODER/DEMULPLEXER	34335	SN74S138N
A12U572	156-1722-00			MICROCKT,DGTL:FTTL,HEX INVERTER	04713	MC74F04ND
A12U580	156-0459-00			MICROCKT,DGTL:STTL,QUAD 2 INP AND GATE	01295	SN74S08(N OR J)
A12U610	156-0048-00			MICROCKT,LINER:5 XSTR ARRAY (OPTION 05 ONLY)	02735	CA3046
A12U612	156-1349-00			MICROCKT,LINER:DUAL INDEP DIFF AMPL (OPTION 05 ONLY)	02735	CA3054-98
A12U624	156-1414-00			MICROCKT,DGTL:TTL,OCTAL GPIB XCVR DATA BUS	01295	SN75160 (N OR J)
A12U630	156-1444-01			MICROCKT,DGTL:NMOS,GPIB INTFC CONTROLLER	01295	TMS9914A (NL)
A12U632	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A12U640	156-1494-01			MICROCKT,DGTL:NMOS,8 BIT MICROPRC,SCRN	04713	MC68B09
A12U650	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A12U654	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A12U660	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A12U664	156-3103-00			MICROCKT,DGTL:CMOS,32768 X 8 SRAM	80009	156-3103-00
A12U668	156-1727-00			MICROCKT,DGTL:1 OF 8 DCDR/DEMULPLEXER	04713	MC74F138 N
A12U670	160-4941-00	B010100	B010197	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-4941-00

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A12U670	160-4941-01	B010198	B010662	MICROCKT, DGTL:16384 X 8 EPROM, PRGM	80009	160-4941-01
A12U670	160-4941-03	B010663	B010779	MICROCKT, DGTL:16384 X 8 EPROM, PRGM	80009	160-4941-03
A12U670	160-4941-04	B010780		MICROCKT, DGTL:16384 X 8 EPROM, PRGM (STANDARD)	80009	160-4941-04
A12U670	160-4941-03			MICROCKT, DGTL:16384 X 8 EPROM, PRGM (2440M)	80009	160-4941-03
A12U680	160-4942-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4942-00
A12U680	160-4942-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4942-01
A12U680	160-4942-03	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4942-03
A12U680	160-4942-04	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (STANDARD)	80009	160-4942-04
A12U680	160-4942-03			MICROCKT, DGTL:65536 X 8 EPROM, PRGM (2440M)	80009	160-4942-03
A12U682	160-4943-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4943-00
A12U682	160-4943-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4943-01
A12U682	160-4943-03	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4943-03
A12U682	160-4943-04	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (STANDARD)	80009	160-4943-04
A12U682	160-4943-03			MICROCKT, DGTL:65536 X 8 EPROM, PRGM (2440M)	80009	160-4943-03
A12U690	160-4944-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4944-00
A12U690	160-4944-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4944-01
A12U690	160-4944-03	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4944-03
A12U690	160-4944-04	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (STANDARD)	80009	160-4944-04
A12U690	160-4944-03			MICROCKT, DGTL:65536 X 8 EPROM, PRGM (2440M)	80009	160-4944-03
A12U692	160-4945-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4945-00
A12U692	160-4945-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4945-01
A12U692	160-4945-03	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-4945-03
A12U692	160-4945-04	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (STANDARD)	80009	160-4945-04
A12U692	160-5841-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5841-00
A12U692	160-5841-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5841-01
A12U692	160-5841-02	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5841-02
A12U692	160-5841-03	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (FRENCH HELP TEXT)	80009	160-5841-03
A12U692	160-5842-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5842-00
A12U692	160-5842-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5842-01
A12U692	160-5842-02	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5842-02
A12U692	160-5842-03	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (GERMAN HELP TEXT)	80009	160-5842-03
A12U692	160-5843-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5843-00
A12U692	160-5843-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5843-01
A12U692	160-5843-02	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5843-02
A12U692	160-5843-03	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (ITALIAN HELP TEXT)	80009	160-5843-03
A12U692	160-5844-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5844-00
A12U692	160-5844-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5844-01
A12U692	160-5844-02	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5844-02
A12U692	160-5844-03	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (SPANISH HELP TEXT)	80009	160-5844-03
A12U692	160-5845-00	B010100	B010197	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5845-00
A12U692	160-5845-01	B010198	B010662	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5845-01
A12U692	160-5845-02	B010663	B010779	MICROCKT, DGTL:65536 X 8 EPROM, PRGM	80009	160-5845-02
A12U692	160-5845-03	B010780		MICROCKT, DGTL:65536 X 8 EPROM, PRGM (DUTCH HELP TEXT)	80009	160-5845-03
A12U692	160-4945-03			MICROCKT, DGTL:65536 X 8 EPROM, PRGM (2440M)	80009	160-4945-03
A12U710	156-1200-01			MICROCKT, LINEAR: BIFET, QUAD OPNL AMPL, SCRNL (OPTION 05 ONLY)	80009	156-1200-01
A12U720	156-2013-00			MICROCKT, DGTL: STTL, IEEE-488 XCVR	27014	DS75162AN
A12U730	156-0956-00			MICROCKT, DGTL: OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A12U750	156-0865-00			MICROCKT, DGTL: OCTAL D FF W/CLR	80009	156-0865-00

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A12U754	156-0865-00			MICROCKT,DGTL:OCTAL D FF W/CLR	80009	156-0865-00
A12U760	156-0865-00			MICROCKT,DGTL:OCTAL D FF W/CLR	80009	156-0865-00
A12U830	156-0914-00			MICROCKT,DGTL:OCT ST BFR W/3-STATE OUT	80009	156-0914-00
A12U840	156-1724-00			MICROCKT,DGTL:FCTL,QUAD 2 INP OR GATE	04713	MC74F32ND
A12U844	156-1216-01			MICROCKT,DGTL:QUAD 2 INP NAND BFR,SCRN	01295	SN74S37JP4
A12U850	156-0985-00			MICROCKT,DGTL:DUAL 5-INPUT NOR GATE	04713	SN74LS260(NORJ)
A12U854	156-0956-00			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A12U860	156-0865-00			MICROCKT,DGTL:OCTAL D FF W/CLR	80009	156-0865-00
A12U862	156-0478-00			MICROCKT,DGTL:DUAL 4-INP AND GATE	01295	SN74LS21N
A12U866	156-0323-00			MICROCKT,DGTL:HEX INVERTER	01295	SN74S04N
A12U870	156-0180-00			MICROCKT,DGTL:QUAD 2-INPUT NAND GATE	80009	156-0180-00
A12U874	156-0382-00			MICROCKT,DGTL:QUAD 2-INP NAND GATE	01295	SN74LS00(N OR J)
A12U880	156-0480-00			MICROCKT,DGTL:TTL,QUAD 2-INP AND GATE	80009	156-0480-00
A12U884	156-0469-00			MICROCKT,DGTL:3-LINE TO 8-LINE DECODER	01295	SN74LS138N
A12U890	156-0693-00			MICROCKT,DGTL:DECODER/DEMULTIPLEXER	01295	SN74S139N
A12U894	156-0388-00			MICROCKT,DGTL:DUAL D FLIP-FLOP	01295	SN74LS74 N OR J
A12U940	156-1191-01			MICROCKT,LINEAR:BIFET,DUAL OPNL AMPL,SCRN	80009	156-1191-01
A12U942	156-2396-00			MICROCKT,LINEAR:BIPOLAR,MPU RESET GENERATOR	01295	TL7705 ACP
A12VR105	152-0278-00			SEMICON DVC,DI:ZEN,SI,3V,5%,0.4W,DO-7	80009	152-0278-00
A12VR234	152-0166-00			SEMICON DVC,DI:ZEN,SI,6.2V,5%,400mW,DO-7 (OPTION 05 ONLY)	04713	SZ11738RL
A12VR717	152-0278-00			SEMICON DVC,DI:ZEN,SI,3V,5%,0.4W,DO-7	80009	152-0278-00
A12VR816	152-0175-00			SEMICON DVC,DI:ZEN,SI,5.6V,5%,0.5W,DO-7 (OPTION 05 ONLY)	14552	TD3810976
A12W123	175-9353-01			CABLE ASSY,RF:8.50 OHM COAX,15.0 L (OPTION 05 ONLY)	TK1544	ORDER BY DESCR
A12W130	175-9025-00			CA ASSY,SP,ELEC:50, 28 AWG,1.7 L	80009	175-9025-00
A12XU470	136-0813-00			SKT,PL-IN ELEK:CHIP CARRIER,68 CONTACTS	19613	268-5400-00-1102
A12XU480	136-0751-00			SKT,PL-IN ELEK:MICROCKT,24 PIN	09922	DILB24P108
A12XU490	136-0751-00			SKT,PL-IN ELEK:MICROCKT,24 PIN	09922	DILB24P108
A12XU540	136-0757-00			SKT,PL-IN ELEK:MICROCIRCUIT,40 DIP	09922	DILB40P-108
A12XU670	136-0755-00			SKT,PL-IN ELEK:MICROCIRCUIT,28 DIP	09922	DILB28P-108
A12XU680	136-0755-00			SKT,PL-IN ELEK:MICROCIRCUIT,28 DIP	09922	DILB28P-108
A12XU682	136-0755-00			SKT,PL-IN ELEK:MICROCIRCUIT,28 DIP	09922	DILB28P-108
A12XU690	136-0755-00			SKT,PL-IN ELEK:MICROCIRCUIT,28 DIP	09922	DILB28P-108
A12XU692	136-0755-00			SKT,PL-IN ELEK:MICROCIRCUIT,28 DIP	09922	DILB28P-108

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A13	671-0125-00		CIRCUIT BD ASSY:SIDE	80009	671-0125-00
A13C700	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C701	283-0177-05		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAATR
A13C702	290-0967-00		CAP,FXD,ELCTLT:22UF,+50-10%,25V	55680	TLB1E220TAAANA
A13C731	290-0967-00		CAP,FXD,ELCTLT:22UF,+50-10%,25V	55680	TLB1E220TAAANA
A13C750	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C751	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C752	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C753	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C754	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C755	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C756	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C757	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C758	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C800	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C801	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C811	281-0814-00		CAP,FXD,CER DI:100 PF,10%,100V	04222	MA101A101KAA
A13C812	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C813	281-0814-00		CAP,FXD,CER DI:100 PF,10%,100V	04222	MA101A101KAA
A13C831	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C832	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C833	281-0757-00		CAP,FXD,CER DI:10PF,20%,100V TUBULAR,MI	04222	MA101A100MAA
A13C841	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C842	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C843	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C850	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C851	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C852	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C853	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C854	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C861	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C864	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C871	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C872	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C873	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C881	290-0183-00		CAP,FXD,ELCTLT:1UF,10%,35V	05397	T3228105K035AS
A13C882	281-0865-00		CAP,FXD,CER DI:1000PF,5%,100V	04222	MA101A102JAA
A13C883	281-0814-00		CAP,FXD,CER DI:100 PF,10%,100V	04222	MA101A101KAA
A13C884	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A13C885	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A13CR761	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A13CR771	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A13CR772	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A13CR773	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A13J150	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 26)	22526	48283-036
A13J155	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 3)	22526	48283-036
A13J156	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13J731	174-0677-00		CABLE ASSY,RF:50 OHM COAX,6.0 L	80009	174-0677-00
A13J843	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 3)	22526	48283-036
A13J844	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 3)	22526	48283-036
A13L731	108-0538-00		COIL,RF:FIXED,2.7UH	76493	JWM#B7059
A13P156	131-0993-00		BUS,CONDUCTOR:SHUNT ASSEMBLY, BLACK	22526	65474-005
A13P843	131-0993-00		BUS,CONDUCTOR:SHUNT ASSEMBLY, BLACK	22526	65474-005
A13P844	131-0993-00		BUS,CONDUCTOR:SHUNT ASSEMBLY, BLACK	22526	65474-005

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A13Q761	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A13Q771	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A13Q772	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A13Q773	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A13Q781	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A13Q782	151-1121-00			TRANSISTOR:FE,N CHANNEL,SI,TO-92	17856	V10206
A13Q783	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A13Q831	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A13R711	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R731	321-1682-07			RES,FXD,FILM:5.7K OHM,0.1%,0.125W,TC=T9	19701	5033RE5K701B
A13R732	321-0641-07			RES,FXD,FILM:1.8K OHM,0.1,0.125W,TC=T9	07716	CEAE 18000B
A13R741	315-0162-00			RES,FXD,FILM:1.6K OHM,5%,0.25W	19701	5043CX1K600J
A13R750	313-1101-00			RES,FXD,FILM:100 OHM,5%,0.2W	57668	TR20JE100E
A13R751	313-1101-00			RES,FXD,FILM:100 OHM,5%,0.2W	57668	TR20JE100E
A13R752	313-1101-00			RES,FXD,FILM:100 OHM,5%,0.2W	57668	TR20JE100E
A13R753	313-1101-00			RES,FXD,FILM:100 OHM,5%,0.2W	57668	TR20JE200E
A13R755	313-1201-00			RES,FXD,FILM:200 OHM,5%,0.2W	57668	TR20JE10K0
A13R761	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R762	321-1489-00			RES,FXD,FILM:1.23M,1%,0.125W,TC=TO	01121	CC1234FY
A13R771	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R772	322-3293-00			RES,FXD,FILM:11K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 11K0
A13R773	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R774	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R775	321-0393-00			RES,FXD,FILM:121K OHM,1%,0.125W,TC=TO	19701	5043ED121K0F
A13R780	321-1720-00			RES,FXD,FILM:3.24M OHM,1%,0.125W,TC=TO	14298	AME57G32403F-T/R
A13R781	321-0556-00			RES,FXD,FILM:6.04M OHM,1.0%,0.125W,TC=TO	03888	PME60 6.04M 1%
A13R782	321-0556-00			RES,FXD,FILM:6.04M OHM,1.0%,0.125W,TC=TO	03888	PME60 6.04M 1%
A13R783	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R784	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R800	307-0648-00			RES NTWK,FXD,FI:8,100 OHM,2%,0.125 W	01121	316B101
A13R801	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R802	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R803	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE 5K1
A13R804	313-1512-00			RES,FXD,FILM:5.1K OHM,5%,0.2W	57668	TR20JE 5K1
A13R805	313-1512-00			RES,FXD,FILM:5.1K OHM,5%,0.2W	57668	TR20JE10K0
A13R806	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R807	313-1512-00			RES,FXD,FILM:5.1K OHM,5%,0.2W	57668	TR20JE 5K1
A13R808	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R809	313-1101-00			RES,FXD,FILM:100 OHM,5%,0.2W	57668	TR20JE100E
A13R810	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R811	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R812	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R813	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R814	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R815	313-1101-00			RES,FXD,FILM:100 OHM,5%,0.2W	57668	TR20JE100E
A13R832	321-0808-03			RES,FXD,FILM:300 OHM,0.25%,0.125W,TC=T2	57668	RB14CYE 300E
A13R833	321-0282-00			RES,FXD,FILM:8.45K OHM,1%,0.125W,TC=TO	07716	CFAD84500F
A13R834	322-3293-00			RES,FXD,FILM:11K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 11K0
A13R835	313-1101-00			RES,FXD,FILM:100 OHM,5%,0.2W	57668	TR20JE100E
A13R841	313-1621-00			RES,FXD,FILM:620 OHM,5%,0.2W	57668	TR20JE 620E
A13R842	315-0162-00			RES,FXD,FILM:1.6K OHM,5%,0.25W	19701	5043CX1K600J
A13R843	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R844	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R845	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R846	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R861	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R862	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A13R863	313-1102-00			RES,FXD,FILM:1K OHM,5%,0.2W	57668	TR20JE01K0

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A13R871	313-1102-00		RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A13R881	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A13R882	321-0271-00		RES, FXD, FILM: 6.49K OHM, 1%, 0.125W, TC=TO	07716	CEAD64900F
A13R883	321-0245-00		RES, FXD, FILM: 3.48K OHM, 1%, 0.125W, TC=TO	19701	5033ED3K48F
A13R884	313-1102-00		RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A13R885	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A13R886	313-1183-00		RES, FXD, FILM: 18K OHM, 5%, 0.2W	57668	TR20JT68 18K
A13R887	313-1183-00		RES, FXD, FILM: 18K OHM, 5%, 0.2W	57668	TR20JT68 18K
A13R888	315-0162-00		RES, FXD, FILM: 1.6K OHM, 5%, 0.25W	19701	5043CX1K600J
A13R889	313-1102-00		RES, FXD, FILM: 1K OHM, 5%, 0.2W	57668	TR20JE01K0
A13TP701	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP702	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP811	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP812	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP813	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP814	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP815	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP821	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP822	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP823	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP824	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP825	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP826	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP827	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP871	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13TP881	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A13U700	160-2405-00		MICROCKT, DGTL: 8 BIT MICROCOMPUTER W/CLOCK	04713	MC6805R3P
A13U731	156-1149-01		MICROCKT, LINEAR: OPERATION AMP JFET INPUT	27014	AL160307
A13U732	156-1722-00		MICROCKT, DGTL: FTTL, HEX INVERTER	04713	MC74F04ND
A13U741	156-1221-00		MICROCKT, DGTL: LSTTL, HEX D-TYPE FF, SCRN	80009	156-1221-00
A13U742	156-1065-01		MICROCKT, DGTL: LSTTL, OCTAL D-TYPE TRANS	04713	SN74LS373 ND/JD
A13U750	156-1277-00		MICROCKT, DGTL: LSTTL, 3-STATE OCTAL BFR, SCRN	27014	DM81LS95ANA+
A13U751	156-0956-00		MICROCKT, DGTL: OCTAL BFR W/3 STATE OUT	18324	N74LS244(N OR F)
A13U752	156-1277-00		MICROCKT, DGTL: LSTTL, 3-STATE OCTAL BFR, SCRN	27014	DM81LS95ANA+
A13U753	156-1277-00		MICROCKT, DGTL: LSTTL, 3-STATE OCTAL BFR, SCRN	27014	DM81LS95ANA+
A13U761	156-1277-00		MICROCKT, DGTL: LSTTL, 3-STATE OCTAL BFR, SCRN	27014	DM81LS95ANA+
A13U762	156-1221-00		MICROCKT, DGTL: LSTTL, HEX D-TYPE FF, SCRN	80009	156-1221-00
A13U781	156-0469-00		MICROCKT, DGTL: 3-LINE TO 8-LINE DECODER	01295	SN74LS138N
A13U831	156-0048-00		MICROCKT, LINEAR: 5 XSTR ARRAY	02735	CA3046
A13U841	156-1611-00		MICROCKT, DGTL: ASTTL, DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A13U842	156-1611-00		MICROCKT, DGTL: ASTTL, DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A13U843	156-2251-00		MICROCKT, DGTL: FTTL, SYN PRESETTABLE BIN CNTR	04713	MC74F161AN
A13U844	156-2251-00		MICROCKT, DGTL: FTTL, SYN PRESETTABLE BIN CNTR	04713	MC74F161AN
A13U851	156-1743-00		MICROCKT, DGTL: FTTL, QUAD 2-INPUT NOR GATE	18324	74F02 NB OR FB
A13U852	156-1172-00		MICROCKT, DGTL: DUAL 4 BIT BIN CNTR	80009	156-1172-00
A13U853	156-1172-00		MICROCKT, DGTL: DUAL 4 BIT BIN CNTR	80009	156-1172-00
A13U861	156-0388-00		MICROCKT, DGTL: DUAL D FLIP-FLOP	01295	SN74LS74 N OR J
A13U862	156-0383-00		MICROCKT, DGTL: QUAD 2-IMP NOR GATE	01295	SN74LS02 N OR J
A13U871	156-1126-01		MICROCKT, LINEAR: VOLTAGE COMPARATOR, SELECTED	01295	LM311JG4
A13U872	156-0388-00		MICROCKT, DGTL: DUAL D FLIP-FLOP	01295	SN74LS74 N OR J
A13U881	156-1126-01		MICROCKT, LINEAR: VOLTAGE COMPARATOR, SELECTED	01295	LM311JG4
A13VR841	152-0195-00		SEMICON DVC, DI: ZEN, SI, 5.1V, 5%, 0.4W, DO-7	04713	SZ11755RL
A13W101	175-9023-00		CA ASSY, SP, ELEC: 50, 28 AWG, 8.675 L	80009	175-9023-00
A13W110	175-9027-00		CA ASSY, SP, ELEC: 40, 28 AWG, 1.4 L	80009	175-9027-00
A13W122	175-9024-00		CA ASSY, SP, ELEC: 40, 28 AWG, 3.5 L	80009	175-9024-00
A13W800	131-0566-00		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A14	614-0752-00		FRONT PNL ASSY:STANDARD (STANDARD)	80009	614-0752-00
A14	614-0753-00		FRONT PNL ASSY:TV OPT 05 (OPTION 05)	80009	614-0753-00
A14C902	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A14C903	290-0943-02		CAP,FXD,ELCTLT:47UF,20%,25V	55680	UVX1E470MAA1TD
A14C904	290-0943-02		CAP,FXD,ELCTLT:47UF,20%,25V	55680	UVX1E470MAA1TD
A14C905	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A14C906	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A14CR901	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR902	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR903	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR904	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR906	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR907	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR908	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR909	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR911	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR912	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR913	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR914	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR916	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR917	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR918	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR919	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR921	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR922	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR923	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR924	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR927	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR928	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR929	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR932	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR933	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR934	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR937	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR938	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR939	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR942	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR943	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR944	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR947	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR948	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR949	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR952	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR953	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR954	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR957	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR958	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR959	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR962	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR963	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR964	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR967	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR968	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR969	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14DS901	150-1109-00		LT EMITTING DIO:GREEN,30MA	50434	QLMP-0549
A14DS902	150-1109-00		LT EMITTING DIO:GREEN,30MA	50434	QLMP-0549

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A14DS903	150-1109-00		LT EMITTING DIO:GREEN,30MA	50434	QLMP-0549
A14DS904	150-1109-00		LT EMITTING DIO:GREEN,30MA	50434	QLMP-0549
A14DS906	150-1109-00		LT EMITTING DIO:GREEN,30MA	50434	QLMP-0549
A14R901	311-2181-00		RES, VAR, NONW: LINEAR, 5K OHM, 30%, 0.25W	32997	91Z2D-Z45-EA0020
A14R902	311-2181-00		RES, VAR, NONW: LINEAR, 5K OHM, 30%, 0.25W	32997	91Z2D-Z45-EA0020
A14R903	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R904	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R913	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R914	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R916	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R917	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R918	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R919	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R922	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A14R923	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A14R924	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A14R927	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A14R928	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A14R930	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A14R933	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A14R934	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R935	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R936	313-1103-00		RES, FXD, FILM: 10K OHM, 5%, 0.2W	57668	TR20JE10K0
A14R937	313-1101-00		RES, FXD, FILM: 100 OHM, 5%, 0.2W	57668	TR20JE100E
A14S901	263-0099-00		SW-VAR RES ASSY:	80009	263-0099-00
A14S902	263-0099-00		SW-VAR RES ASSY:	80009	263-0099-00
A14S903	263-0099-00		SW-VAR RES ASSY:	80009	263-0099-00
A14S904	263-0099-00		SW-VAR RES ASSY:	80009	263-0099-00
A14S906	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S907	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S908	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S909	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S911	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S912	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S913	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S914	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S916	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S917	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S918	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S919	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S921	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S922	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S923	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S924	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S927	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S928	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S929	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S932	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S933	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S934	260-2224-00		SWITCH, ROTARY: GRAY CODE, OUTPUT	80009	260-2224-00
A14S942	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S943	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S944	260-2224-00		SWITCH, ROTARY: GRAY CODE, OUTPUT	80009	260-2224-00
A14S952	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S953	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S954	260-2224-00		SWITCH, ROTARY: GRAY CODE, OUTPUT	80009	260-2224-00
A14S962	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S963	260-2088-00		SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A14S964	260-2088-00			SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S967	260-2088-00			SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S968	260-2088-00			SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14S969	260-2088-00			SWITCH, PUSH:1 BTN, 1 POLE, TRIGGER	59821	2LL199NB021068
A14U902	156-0513-03			MICROCKT, LINEAR:CMOS, 8 CHAN ANALOG MUX	04713	MC14051BCL
A14U903	156-0469-00			MICROCKT, DGTL:3-LINE TO 8-LINE DECODER	01295	SN74LS138N
A14U904	156-0625-00			MICROCKT, DGTL:8 BIT PRL LOAD SHIFT RGTR	27014	MM74C165 J OR N
A14W151	175-9022-00			CA ASSY, SP, ELEC:26, 28 AWG, 18.95 L	80009	175-9022-00

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A15	175-9270-01			FLEX CKT ASSY:GPIB,POLYIMIDE	80009	175-9270-01
A15DS920	150-1161-00			LT EMITTING DIO:YELLOW	50434	QLMP 1487
A15DS921	150-1161-00			LT EMITTING DIO:YELLOW	50434	QLMP 1487
A15DS922	150-1161-00			LT EMITTING DIO:YELLOW	50434	QLMP 1487

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A16	670-9902-01		CIRCUIT BD ASSY:LV PWR SPLY	80009	670-9902-01
A16C105	290-1022-00		CAP, FXD, ELCTLT: 680UF, +50-10%, 200V	00853	DCM681T200AL2PC
A16C128	290-0183-00		CAP, FXD, ELCTLT: 1UF, 10%, 35V	05397	T3228105K035AS
A16C137	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A16C138	290-0183-00		CAP, FXD, ELCTLT: 1UF, 10%, 35V	05397	T3228105K035AS
A16C144	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C145	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A16C175	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A16C184	290-0183-00		CAP, FXD, ELCTLT: 1UF, 10%, 35V	05397	T3228105K035AS
A16C185	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C195	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C197	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C219	285-1192-00		CAP, FXD, PPR DI: 0.0022 UF, 20%, 250VAC	TK0515	PME271Y510
A16C223	283-0078-00		CAP, FXD, CER DI: 0.001UF, 20%, 500V	59660	0801 547X5F0102M
A16C225	285-1192-00		CAP, FXD, PPR DI: 0.0022 UF, 20%, 250VAC	TK0515	PME271Y510
A16C227	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C238	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A16C244	290-0798-00		CAP, FXD, ELCTLT: 180UF, +100-10%, 40V	56289	672D187H040DM5C
A16C262	290-0945-00		CAP, FXD, ELCTLT: 840UF 10 + 100 %, 12V	00853	301EN841U012B2
A16C305	290-1022-00		CAP, FXD, ELCTLT: 680UF, +50-10%, 200V	00853	DCM681T200AL2PC
A16C328	285-1384-00		CAP, FXD, PLASTIC: 0.27UF, 10%, 440V	84411	TEK-265
A16C368	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A16C384	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C405	285-1383-00		CAP, FXD, PLASTIC: 0.1UF, 10%, 100V	84411	TEK-291
A16C455	290-0877-00		CAP, FXD, ELCTLT: 1200UF, +100-10%, 6.3V	56289	672D371
A16C460	290-0800-00		CAP, FXD, ELCTLT: 250UF, +100-10%, 20V	56289	672D257H020DM5C
A16C461	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C483	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A16C485	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C487	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C494	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C525	285-1187-00		CAP, FXD, MTLZD: 0.47 UF, 10%, 100 V	05292	PMT 3R .47K 100
A16C528	281-0773-00		CAP, FXD, CER DI: 0.01UF, 10%, 100V	04222	MA201C103KAA
A16C550	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C553	290-0945-00		CAP, FXD, ELCTLT: 840UF 10 + 100 %, 12V	00853	301EN841U012B2
A16C575	281-0773-00		CAP, FXD, CER DI: 0.01UF, 10%, 100V	04222	MA201C103KAA
A16C584	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C585	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C594	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C595	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C625	285-1245-00		CAP, FXD, PLASTIC: 0.01UF, 10%, 400V	55112	171/.01/K/400/C
A16C650	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C664	290-1045-00		CAP, FXD, ELCTLT: 4.7UF, 10%, 35V	56289	173D475X9035W
A16C675	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C683	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C695	290-0942-00		CAP, FXD, ELCTLT: 100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C706	285-1222-00		CAP, FXD, PLASTIC: 0.068UF, 20%, 250V	55112	158/.068/M/250/H
A16C728	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A16C750	290-0798-00		CAP, FXD, ELCTLT: 180UF, +100-10%, 40V	56289	672D187H040DM5C
A16C756	290-0798-00		CAP, FXD, ELCTLT: 180UF, +100-10%, 40V	56289	672D187H040DM5C
A16C764	290-1045-00		CAP, FXD, ELCTLT: 4.7UF, 10%, 35V	56289	173D475X9035W
A16C816	285-1222-00		CAP, FXD, PLASTIC: 0.068UF, 20%, 250V	55112	158/.068/M/250/H
A16C823	281-0812-00		CAP, FXD, CER DI: 1000PF, 10%, 100V	04222	MA101C102KAA
A16C829	290-0183-00		CAP, FXD, ELCTLT: 1UF, 10%, 35V	05397	T3228105K035AS
A16C835	281-0773-00		CAP, FXD, CER DI: 0.01UF, 10%, 100V	04222	MA201C103KAA
A16C856	290-0800-00		CAP, FXD, ELCTLT: 250UF, +100-10%, 20V	56289	672D257H020DM5C
A16C873	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA
A16C890	281-0775-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	MA205E104MAA

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A16C900	290-0183-00			CAP, FXD, ELCTLT:1UF, 10%, 35V	05397	T3228105K035AS
A16C901	281-0775-00			CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	MA205E104MAA
A16C929	281-0775-00			CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	MA205E104MAA
A16C944	281-0773-00			CAP, FXD, CER DI:0.01UF, 10%, 100V	04222	MA201C103KAA
A16C947	290-0942-00			CAP, FXD, ELCTLT:100UF, +100-10%, 25V	55680	UPA1E101MAH
A16C956	290-0800-00			CAP, FXD, ELCTLT:250UF, +100-10%, 20V	56289	672D257H020DM5C
A16CR239	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR245	152-0333-00			SEMICON DVC, DI:SW, SI, 55V, 200MA, DO-35	07263	FDH-6012
A16CR265	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR266	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR354	152-0794-00			SEMICON DVC, DI:RECT, SI, 10A, 30V, TO-220	81483	95-4269
A16CR426	152-0808-00			SEMICON DVC, DI:RECT, SI, 400V, 1.5 A, 50 NS	01281	DSR3400X
A16CR450	152-0398-00	B010100	B011312	SEMICON DVC, DI:RECT, SI, 200V, 1A	04713	SR3609RL
A16CR465	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR466	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR483	152-0066-00			SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A16CR484	152-0066-00			SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A16CR485	152-0066-00			SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A16CR510	152-0750-00			SEMICON DVC, DI:RECT, BRIDGE, SI, 3A, 250NS	05828	RKBPC606-12
A16CR550	152-0398-00	B010100	B011312	SEMICON DVC, DI:RECT, SI, 200V, 1A	04713	SR3609RL
A16CR550	152-0836-00	B011313		SEMICON DVC, DI:RECT, SI, 1A, 40V	04713	IN5819
A16CR551	152-0867-00			SEMICON DVC, DI:DUAL RECT, SI, 30V, 8A, TO-220	80009	152-0867-00
A16CR575	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR576	152-0066-00			SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A16CR583	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR586	152-0066-00			SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A16CR588	152-0066-00			SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A16CR630	152-0400-00			SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	SR1977K
A16CR631	152-0400-00			SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	SR1977K
A16CR650	152-0398-00			SEMICON DVC, DI:RECT, SI, 200V, 1A	04713	SR3609RL
A16CR651	152-0398-00			SEMICON DVC, DI:RECT, SI, 200V, 1A	04713	SR3609RL
A16CR683	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR684	152-0066-00			SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A16CR685	152-0066-00			SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A16CR723	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR724	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR730	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR750	152-0398-00			SEMICON DVC, DI:RECT, SI, 200V, 1A	04713	SR3609RL
A16CR751	152-0398-00			SEMICON DVC, DI:RECT, SI, 200V, 1A	04713	SR3609RL
A16CR765	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR766	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR796	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR823	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR824	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR845	152-0867-00			SEMICON DVC, DI:DUAL RECT, SI, 30V, 8A, TO-220	80009	152-0867-00
A16CR846	152-0794-00			SEMICON DVC, DI:RECT, SI, 10A, 30V, TO-220	81483	95-4269
A16CR865	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR866	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR896	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR930	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A16CR4450	152-0836-00	B011313		SEMICON DVC, DI:RECT, SI, 1A, 40V	04713	IN5819
A16E609	119-0181-00			ARSR, ELEC SURGE:230, GAS FILLED	25088	B1-A230
A16E616	119-0181-00			ARSR, ELEC SURGE:230, GAS FILLED	25088	B1-A230
A16F269	159-0236-00			FUSE, WIRE LEAD:10A, 125V, FAST	TK0946	SP5-10A
A16F961	159-0235-00			FUSE, WIRE LEAD:0.75A, 125V, FAST	80009	159-0235-00
A16J102	131-3147-00			CONN, RCPT, ELEC:HEADER, 2 X 25, 0.1 SPACING	53387	3596-6002
A16J166	131-0608-00			TERMINAL, PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 9)	22526	48283-036

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A16L256	108-1234-00			COIL, RF: FIXED, 5UH	80009	108-1234-00
A16L556	108-1234-00			COIL, RF: FIXED, 5UH	80009	108-1234-00
A16L557	108-1233-00			COIL, RF: FIXED, 27UH, 10%	02113	ORDER BY DESCR
A16L656	108-1233-00			COIL, RF: FIXED, 27UH, 10%	02113	ORDER BY DESCR
A16L709	108-1209-00			COIL, RF: FXD TOROIDAL, 80UH MIN, 3A DC	94617	ORDER BY DESCR
A16L715	108-1209-00			COIL, RF: FXD TOROIDAL, 80UH MIN, 3A DC	94617	ORDER BY DESCR
A16L756	108-1233-00			COIL, RF: FIXED, 27UH, 10%	02113	ORDER BY DESCR
A16L945	108-1233-00			COIL, RF: FIXED, 27UH, 10%	02113	ORDER BY DESCR
A16L950	108-1233-00			COIL, RF: FIXED, 27UH, 10%	02113	ORDER BY DESCR
A16P30	131-2427-00			TERM, QIK DISC. :CKT BD, BRASS	00779	62409-1
A16P60	131-2427-00			TERM, QIK DISC. :CKT BD, BRASS	00779	62409-1
A16P70	131-2427-00			TERM, QIK DISC. :CKT BD, BRASS	00779	62409-1
A16P80	131-2427-00			TERM, QIK DISC. :CKT BD, BRASS	00779	62409-1
A16Q148	151-0432-00			TRANSISTOR: NPN, SI, 625MW, TO-92	04713	SPS8512
A16Q240	151-0301-00			TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A16Q279	151-0798-00			TRANSISTOR: PNP, SI, TO-220	S4091	2SB826 Q OR R
A16Q295	151-0341-00			TRANSISTOR: NPN, SI, TO-106	04713	SPS6919
A16Q365	151-0134-00			TRANSISTOR: PNP, SI, TO-39	04713	SM3195
A16Q421	151-1214-00	B010100	B010903	TRANSISTOR: MOSFET, SI, TO-220	80009	151-1214-00
A16Q421	151-1214-01	B010904		TRANSISTOR: MOSFET, SI, TO-220 (STANDARD)	80009	151-1214-01
A16Q421	151-1214-01			TRANSISTOR: MOSFET, SI, TO-220 (2440M)	80009	151-1214-01
A16Q423	151-1214-00	B010100	B010903	TRANSISTOR: MOSFET, SI, TO-220	80009	151-1214-00
A16Q423	151-1214-01	B010904		TRANSISTOR: MOSFET, SI, TO-220 (STANDARD)	80009	151-1214-01
A16Q423	151-1214-01			TRANSISTOR: MOSFET, SI, TO-220 (2440M)	80009	151-1214-01
A16Q465	151-0103-00			TRANSISTOR: NPN, SI, TO-5	80009	151-0103-00
A16Q479	151-0797-00			TRANSISTOR: NPN, SI, TO-220	S4091	2SD1062 Q OR R
A16Q521	151-1141-00			TRANSISTOR: FE, N-CHANNEL, SI, TO-220	04713	STP3000
A16Q665	151-0134-00			TRANSISTOR: PNP, SI, TO-39	04713	SM3195
A16Q721	151-1141-00			TRANSISTOR: FE, N-CHANNEL, SI, TO-220	04713	STP3000
A16Q779	151-0798-00			TRANSISTOR: PNP, SI, TO-220	S4091	2SB826 Q OR R
A16Q836	151-0103-00			TRANSISTOR: NPN, SI, TO-5	80009	151-0103-00
A16Q870	151-0103-00			TRANSISTOR: NPN, SI, TO-5	80009	151-0103-00
A16Q879	151-0797-00			TRANSISTOR: NPN, SI, TO-220	S4091	2SD1062 Q OR R
A16R117	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R128	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R129	321-0430-00			RES, FXD, FILM: 294K OHM, 1%, 0.125W, TC=TO	07716	CEAD29402F
A16R136	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16R143	321-0356-00			RES, FXD, FILM: 49.9K OHM, 1%, 0.125W, TC=TO	19701	5033ED49K90F
A16R144	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R146	321-0420-00			RES, FXD, FILM: 232K OHM, 1%, 0.125W, TC=TO	07716	CEAD23202F
A16R164	321-0289-07			RES, FXD, FILM: 10.0K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE10K00B
A16R165	321-0816-07			RES, FXD, FILM: 5K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE5K000B
A16R166	321-0242-00			RES, FXD, FILM: 3.24K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K240F
A16R167	315-0474-00			RES, FXD, FILM: 470K OHM, 5%, 0.25W	19701	5043CX470K0J92U
A16R185	315-0753-00			RES, FXD, FILM: 75K OHM, 5%, 0.25W	57668	NTR25J-E75K0
A16R186	321-0335-00			RES, FXD, FILM: 30.1K OHM, 1%, 0.125W, TC=TO	57668	RB14FXE30K1
A16R187	321-0337-00			RES, FXD, FILM: 31.6K OHM, 1%, 0.125W, TC=TO	07716	CEAD31601F
A16R195	315-0474-00			RES, FXD, FILM: 470K OHM, 5%, 0.25W	19701	5043CX470K0J92U
A16R217	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R223	305-0104-00			RES, FXD, CMPSN: 100K OHM, 5%, 2W	01121	HB1045
A16R226	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R227	321-0193-00			RES, FXD, FILM: 1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A16R228	321-0335-00			RES, FXD, FILM: 30.1K OHM, 1%, 0.125W, TC=TO	57668	RB14FXE30K1
A16R238	315-0470-00			RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A16R240	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16R244	315-0753-00			RES, FXD, FILM: 75K OHM, 5%, 0.25W	57668	NTR25J-E75K0
A16R265	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16R274	321-0420-00			RES, FXD, FILM: 232K OHM, 1%, 0.125W, TC=TO	07716	CEAD23202F
A16R275	321-0286-00			RES, FXD, FILM: 9.31K OHM, 1%, 0.125W, TC=TO	19701	5043ED9K310F
A16R276	321-0143-00			RES, FXD, FILM: 301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301R0F
A16R281	315-0100-00			RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A16R285	321-0356-00			RES, FXD, FILM: 49.9K OHM, 1%, 0.125W, TC=TO	19701	5033ED49K90F
A16R293	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R295	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16R296	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R323	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16R324	321-0114-00			RES, FXD, FILM: 150 OHM, 1%, 0.125 W, TC=TO	19701	5033ED150R0F
A16R325	323-0436-00			RES, FXD, FILM: 340K OHM, 1%, 0.5W, TC=TO	91637	MFF1226G34002F
A16R368	321-0210-00			RES, FXD, FILM: 1.50K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K50F
A16R369	321-0184-00			RES, FXD, FILM: 806 OHM, 1%, 0.125W, TC=TO	19701	5033ED806R0F
A16R374	315-0100-00			RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A16R376	308-0839-00			RES, FXD, WW: 0.1 OHM, 5%, 1.0W	75042	BW-20-R1000J
A16R388	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A16R394	321-0337-00			RES, FXD, FILM: 31.6K OHM, 1%, 0.125W, TC=TO	07716	CEAD31601F
A16R396	321-0337-00			RES, FXD, FILM: 31.6K OHM, 1%, 0.125W, TC=TO	07716	CEAD31601F
A16R397	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16R401	315-0474-00			RES, FXD, FILM: 470K OHM, 5%, 0.25W	19701	5043CX470K0J92U
A16R405	308-0703-00			RES, FXD, WW: 1.8 OHM, 5%, 2W	75042	BW 1.8 OHM 5%
A16R410	315-0474-00			RES, FXD, FILM: 470K OHM, 5%, 0.25W	19701	5043CX470K0J92U
A16R428	305-0221-00			RES, FXD, CMPSN: 220 OHM, 5%, 2W	01121	HB2215
A16R429	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R434	321-0242-00			RES, FXD, FILM: 3.24K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K240F
A16R435	321-0242-00			RES, FXD, FILM: 3.24K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K240F
A16R436	321-0385-00			RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A16R465	321-0184-00			RES, FXD, FILM: 806 OHM, 1%, 0.125W, TC=TO	19701	5033ED806R0F
A16R466	321-0242-00			RES, FXD, FILM: 3.24K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K240F
A16R473	308-0839-00			RES, FXD, WW: 0.1 OHM, 5%, 1.0W	75042	BW-20-R1000J
A16R474	321-0143-00			RES, FXD, FILM: 301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301R0F
A16R475	321-0335-00	B010100	B011312	RES, FXD, FILM: 30.1K OHM, 1%, 0.125W, TC=TO	57668	RB14FXE30K1
A16R475	321-0322-00	B011313		RES, FXD, FILM: 22.1K OHM, 0.1%, 0.125W, TC=TO	19701	5033ED22K10F
A16R476	321-0193-00			RES, FXD, FILM: 1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A16R477	321-0385-00			RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A16R478	315-0100-00			RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A16R483	321-0106-00			RES, FXD, FILM: 124 OHM 1%, 0.125W, TC=TO	80009	321-0106-00
A16R505	321-0385-00			RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A16R516	321-0356-00			RES, FXD, FILM: 49.9K OHM, 1%, 0.125W, TC=TO	19701	5033ED49K90F
A16R518	321-0356-00			RES, FXD, FILM: 49.9K OHM, 1%, 0.125W, TC=TO	19701	5033ED49K90F
A16R565	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R566	315-0100-00			RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A16R575	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R576	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R578	315-0100-00			RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A16R624	321-0114-00			RES, FXD, FILM: 150 OHM, 1%, 0.125 W, TC=TO	19701	5033ED150R0F
A16R627	306-0154-00			RES, FXD, CMPSN: 150K OHM, 10%, 2W	01121	HB1541
A16R640	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A16R675	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R676	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R684	321-0193-00			RES, FXD, FILM: 1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A16R686	321-0306-00			RES, FXD, FILM: 15.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED15J00F
A16R688	321-0280-00			RES, FXD, FILM: 8.06K OHM, 1%, 0.125W, TC=TO	19701	5033ED8K060F
A16R713	301-0680-00			RES, FXD, FILM: 68 OHM, 5%, 0.5W	19701	5053CX68R00J
A16R723	315-0470-00			RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A16R724	315-0470-00			RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A16R727	308-0843-00			RES, FXD, WW: 0.2 OHM, 5%, 1.0W	91637	RS1A-90-R2J
A16R728	321-0184-00			RES, FXD, FILM: 806 OHM, 1%, 0.125W, TC=TO	19701	5033ED806ROF
A16R758	308-0223-00			RES, FXD, WW: 35 OHM, 5%, 3W	00213	1240S-35-5
A16R760	308-0555-00			RES, FXD, WW: 5 OHM, 5%, 3W	00213	1200S-5.0-5
A16R765	315-0100-00			RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A16R769	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16R773	308-0839-00			RES, FXD, WW: 0.1 OHM, 5%, 1.0W	75042	BW-20-R1000J
A16R774	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A16R775	321-0264-00	B010100	B010670	RES, FXD, FILM: 5.49K OHM, 1%, 0.125W, TC=TO	07716	CEAD54900C
A16R775	321-0816-00	B010671		RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO (STANDARD ONLY)	24546	NA55D5001F
A16R775	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO (2440M ONLY)	24546	NA55D5001F
A16R776	321-0143-00			RES, FXD, FILM: 301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301ROF
A16R777	321-0385-00			RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A16R794	321-0306-00			RES, FXD, FILM: 15.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED15J00F
A16R795	321-0280-00			RES, FXD, FILM: 8.06K OHM, 1%, 0.125W, TC=TO	19701	5033ED8K060F
A16R796	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R797	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R808	315-0470-00			RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A16R809	301-0300-00			RES, FXD, FILM: 30 OHM, 5%, 0.5W	19701	5053CX30R00J
A16R815	315-0470-00			RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A16R822	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R823	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R824	321-0193-00			RES, FXD, FILM: 1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A16R834	321-0143-00			RES, FXD, FILM: 301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301ROF
A16R835	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R836	321-0184-00			RES, FXD, FILM: 806 OHM, 1%, 0.125W, TC=TO	19701	5033ED806ROF
A16R845	321-0242-00			RES, FXD, FILM: 3.24K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K240F
A16R847	321-0210-00			RES, FXD, FILM: 1.50K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K50F
A16R864	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16R865	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R866	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R872	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R873	308-0839-00			RES, FXD, WW: 0.1 OHM, 5%, 1.0W	75042	BW-20-R1000J
A16R874	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A16R875	321-0269-00			RES, FXD, FILM: 6.19K OHM, 1%, 0.125W, TC=TO	07716	CEAD61900F
A16R876	321-0143-00			RES, FXD, FILM: 301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301ROF
A16R877	321-0356-00			RES, FXD, FILM: 49.9K OHM, 1%, 0.125W, TC=TO	19701	5033ED49K90F
A16R900	321-0356-00			RES, FXD, FILM: 49.9K OHM, 1%, 0.125W, TC=TO	19701	5033ED49K90F
A16R905	321-0184-00			RES, FXD, FILM: 806 OHM, 1%, 0.125W, TC=TO	19701	5033ED806ROF
A16R906	321-0193-00			RES, FXD, FILM: 1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A16R925	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A16R926	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R931	321-0193-00			RES, FXD, FILM: 1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A16R932	315-0474-00			RES, FXD, FILM: 470K OHM, 5%, 0.25W	19701	5043CX470KJ92U
A16R938	321-0242-00			RES, FXD, FILM: 3.24K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K240F
A16R939	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A16R975	321-0932-00			RES, FXD, FILM: 2.5K OHM, 1%, 0.125W, TC=TO	24546	NA55D2501F
A16RT717	307-0157-00			RES, THERMAL: 5 OHM, 10%, DISC	15454	5DA5R0K270SSSIL
A16RT805	307-0157-00			RES, THERMAL: 5 OHM, 10%, DISC	15454	5DA5R0K270SSSIL
A16S1020	260-0724-00			SWITCH, THRMSTC: NC, OPEN 83.3, CL 66-7; 10A	93410	430-367
A16T117	120-1560-00			TRANSFORMER, RF: HIGH FREQUENCY COMM MODE	02113	ORDER BY DESC
A16T335	120-1561-00			TRANSFORMER, RF: POT CORE	02113	F5142-A
A16T415	120-1401-00			XFMR, TRIGGER: LINE, 1:1 TURNS RATIO	54937	DMI 500-2044
A16T620	120-1555-00			TRANSFORMER, RF: DRIVER HIGH FREQ, GATE D	80009	120-1555-00
A16T639	120-1550-00			XFMR, PWR, STPDN: HIGH FREQUENCY	TK2038	ORDER BY DESC

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A16U155	156-0885-00		CPLR,OPTOELECTR:LED,5KV ISOLATION	04713	SOC 123A
A16U170	156-0853-00		MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A16U180	156-2186-00		MICROCKT,LINER:VOLT REF,10V,0.1%	27014	LM368H-10
A16U189	156-0853-00		MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A16U233	156-2024-00		MICROCKT,LINER:PULSE WIDTH MOD CONTROLLER	12969	UC3525AN
A16U265	156-0885-00		CPLR,OPTOELECTR:LED,5KV ISOLATION	04713	SOC 123A
A16U270	156-0853-00		MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A16U395	156-1225-00		MICROCKT,LINER:DUAL COMPARATOR	01295	LM393P
A16U470	156-0853-00		MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A16U570	156-0853-00		MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A16U579	156-1161-00		MICROCKT,LINER:VOLTAGE REGULATOR,POS,ADJ	12969	UC317T
A16U679	156-1451-00		MICROCKT,LINER:BIPOLAR,3 TERM NEG VOLTAGE	27014	LM337T
A16U770	156-0853-00		MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A16U829	156-0366-00		MICROCKT,DGTL:DUAL D FLIP-FLOP	02735	CD4013BF
A16U834	156-1225-00		MICROCKT,LINER:DUAL COMPARATOR	01295	LM393P
A16U840	156-0411-00		MICROCKT,LINER:SGL SPLY COMPARATOR	04713	LM339N
A16U870	156-0853-00		MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A16U900	156-0854-00		MICROCKT,LINER:OPNL AMPL	27014	LM308AN
A16VR144	152-0168-00		SEMICON DVC,DI:ZEN,SI,12V,5%,0.4W,DO-763B	14552	TD331689
A16VR380	152-0195-00		SEMICON DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	04713	SZ11755RL
A16VR870	152-0168-00		SEMICON DVC,DI:ZEN,SI,12V,5%,0.4W,DO-763B	14552	TD331689
A16VR929	152-0168-00		SEMICON DVC,DI:ZEN,SI,12V,5%,0.4W,DO-763B	14552	TD331689
A16W270	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W280	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W310	196-2827-00		LEAD,ELECTRICAL:18 AWG,2.75 L,3-4	80009	196-2827-00
A16W315	196-2827-00		LEAD,ELECTRICAL:18 AWG,2.75 L,3-4	80009	196-2827-00
A16W360	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W368	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W460	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W462	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W467	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W566	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W627	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W662	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W664	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W762	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W860	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W862	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W865	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16W868	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A17	670-9748-00			CIRCUIT BD ASSY:HV POWER SPLY	80009	670-9748-00
A17C109	281-0909-00			CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A17C133	281-0772-00			CAP,FXD,CER DI:4700PF,10%,100V	04222	MA201C472KAA
A17C139	283-0167-02			CAP,FXD,CER DI:0.1UF,10%,100V	54583	FK26X5R2A104K-T
A17C160	281-0865-00			CAP,FXD,CER DI:1000PF,5%,100V	04222	MA101A102JAA
A17C179	281-0909-00			CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A17C189	281-0909-00			CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A17C218	290-0766-00			CAP,FXD,ELCTL:2.2UF,+50-10%,160VDC	54473	ECEA2CS2R2
A17C222	281-0909-00			CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A17C234	281-0762-00			CAP,FXD,CER DI:27PF,20%,100V	04222	MA101A270MAA
A17C239	281-0909-00			CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A17C260	283-0167-02			CAP,FXD,CER DI:0.1UF,10%,100V	54583	FK26X5R2A104K-T
A17C269	281-0909-00			CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A17C288	283-0167-02			CAP,FXD,CER DI:0.1UF,10%,100V	54583	FK26X5R2A104K-T
A17C289	283-0187-05			CAP,FXD,CER DI:0.047UF,10%,500V	51642	W400500-X5R-473K
A17C295	281-0798-00			CAP,FXD,CER DI:51PF,1%,100V	04222	MA101A510GAA
A17C317	290-0939-00			CAP,FXD,ELCTL:10UF,+100-10%,100V	56289	672D106H100CG2C
A17C327	281-0909-00			CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A17C409	281-0814-00			CAP,FXD,CER DI:100 PF,10%,100V	04222	MA101A101KAA
A17C613	290-0973-00			CAP,FXD,ELCTL:100UF,20%,25VDC	55680	ULB1E101MPA
A17C617	283-0339-00			CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A17C618	283-0187-05			CAP,FXD,CER DI:0.047UF,10%,500V	51642	W400500-X5R-473K
A17C628	281-0865-00			CAP,FXD,CER DI:1000PF,5%,100V	04222	MA101A102JAA
A17C629	283-0187-05			CAP,FXD,CER DI:0.047UF,10%,500V	51642	W400500-X5R-473K
A17C638	283-0187-05			CAP,FXD,CER DI:0.047UF,10%,500V	51642	W400500-X5R-473K
A17C640	281-0766-00			CAP,FXD,CER DI:100PF,20%,200V	04222	MA106A101MAA
A17C643	283-0187-05			CAP,FXD,CER DI:0.047UF,10%,500V	51642	W400500-X5R-473K
A17C688	283-0429-00			CAP,FXD,CER DI:270PF,20%,2000V	51406	DHR12-Z5U271M-2K
A17C689	283-0187-05			CAP,FXD,CER DI:0.047UF,10%,500V	51642	W400500-X5R-473K
A17C690	283-0167-02			CAP,FXD,CER DI:0.1UF,10%,100V	54583	FK26X5R2A104K-T
A17C692	283-0187-05			CAP,FXD,CER DI:0.047UF,10%,500V	51642	W400500-X5R-473K
A17C694	283-0167-02			CAP,FXD,CER DI:0.1UF,10%,100V	54583	FK26X5R2A104K-T
A17CR134	152-0574-00			SEMICON DVC,DI:SW,SI,120V,0.150MA,4NS,D035	12969	NDP566
A17CR315	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A17CR411	152-0400-00			SEMICON DVC,DI:RECT,SI,400V,1A	04713	SR1977K
A17CR442	152-0061-00			SEMICON DVC,DI:SW,SI,175V,0.1A,DO-35	07263	FDH2161
A17CR500	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A17CR541	152-0061-00			SEMICON DVC,DI:SW,SI,175V,0.1A,DO-35	07263	FDH2161
A17CR565	152-0805-03			SEMICON DVC,DI:HV MODULE,22KVDC OUTPUT	60211	VM341
A17CR610	152-0400-00			SEMICON DVC,DI:RECT,SI,400V,1A	04713	SR1977K
A17CR611	152-0400-00			SEMICON DVC,DI:RECT,SI,400V,1A	04713	SR1977K
A17CR643	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A17CR644	152-0061-00			SEMICON DVC,DI:SW,SI,175V,0.1A,DO-35	07263	FDH2161
A17DS490	150-0030-00			LAMP,GLOW:60-90V MAX,0.6MA,A28-T,WIRE LEADS	58224	A2B-T
A17DS491	150-0030-00			LAMP,GLOW:60-90V MAX,0.6MA,A28-T,WIRE LEADS	58224	A2B-T
A17J162	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 2)	22526	48283-036
A17J172	131-0589-00			TERMINAL,PIN:0.46 L X 0.025 SQ,PH BRZ (QUANTITY OF 2)	22526	48283-029
A17J173	131-0589-00			TERMINAL,PIN:0.46 L X 0.025 SQ,PH BRZ (QUANTITY OF 2)	22526	48283-029
A17J174	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 9)	22526	48283-036
A17J176	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 9)	22526	48283-036
A17L605	108-0318-00			COIL,RF:FIXED,100UH	32159	81000M
A17Q145	151-0443-00			TRANSISTOR:PNP,SI,TO-92	04713	SPS7950
A17Q152	151-0443-00			TRANSISTOR:PNP,SI,TO-92	04713	SPS7950
A17Q215	151-0444-00			TRANSISTOR:NPN,SI,TO-92	04713	SPS797

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Discont		Code	
A17Q269	151-0443-00			TRANSISTOR:PNP,SI,TO-92	04713	SPS7950
A17Q500	151-0443-00			TRANSISTOR:PNP,SI,TO-92	04713	SPS7950
A17Q628	151-0816-00			TRANSISTOR:PNP,SI,TO-3P	TK1016	2SA1264R
A17Q640	151-0444-00			TRANSISTOR:NPN,SI,TO-92	04713	SPS797
A17R100	311-2234-00			RES,VAR,NONW:TRMR,5K OHM,20%,0.5W LINEAR	TK1450	GF06UT 5K
A17R119	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A17R122	321-0267-00			RES,FXD,FILM:5.90K OHM,1%,0.125W,TC=TO	19701	5033ED5K900F
A17R137	301-0752-00			RES,FXD,FILM:7.5K OHM,5%,0.5W	19701	5053CX7K500J
A17R145	321-0368-00			RES,FXD,FILM:66.5K OHM,1%,0.125W,TC=TO	07716	CEAD66501F
A17R160	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A17R161	313-1224-00			RES,FXD,FILM:220K,5%,0.2W	57668	TR20JE 220K
A17R162	313-1272-00			RES,FXD,FILM:2.7K OHM,5%,0.2W	57668	TR20JE 02K7
A17R170	313-1272-00			RES,FXD,FILM:2.7K OHM,5%,0.2W	57668	TR20JE 02K7
A17R178	313-1393-00			RES,FXD,FILM:121K OHM,5%,0.2W	57668	TR20JE 39K
A17R179	321-0693-00			RES,FXD,FILM:68.1K OHM,0.5%,0.125W,TC=TO	19701	5033RD6812DB2980
A17R200	311-2239-00			RES,VAR,NONW:TRMR,100K OHM,20%,0.5W LINEAR	TK1450	GF06UT 100K
A17R209	321-0245-00			RES,FXD,FILM:3.48K OHM,1%,0.125W,TC=TO	19701	5033ED3K48F
A17R233	313-1560-00			RES,FXD,FILM:56 OHM,5%,0.2W	57668	TR20JE 56E
A17R245	322-3438-00			RES,FXD,FILM:357K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 357K
A17R246	321-0447-00			RES,FXD,FILM:442K OHM,1%,0.125W,TC=TO	24546	NA55D4423F
A17R247	321-0393-00			RES,FXD,FILM:121K OHM,1%,0.125W,TC=TO	19701	5043ED121K0F
A17R248	321-0407-00			RES,FXD,FILM:169K OHM,1%,0.125W,TC=TO	07716	CEAD16902F
A17R260	321-0393-00			RES,FXD,FILM:121K OHM,1%,0.125W,TC=TO	19701	5043ED121K0F
A17R261	321-0367-00			RES,FXD,FILM:64.9K OHM,1%,0.125W,TC=TO	07716	CEAD64901F
A17R262	321-0413-00			RES,FXD,FILM:196K OHM,1%,0.125W,TC=TO	07716	CEAD19602F
A17R263	321-0963-07			RES,FXD,FILM:98.73K OHM,0.1%,0.125W,TC=T9	07716	CEA 98.73KOHM 1%
A17R277	321-0693-00			RES,FXD,FILM:68.1K OHM,0.5%,0.125W,TC=TO	19701	5033RD6812DB2980
A17R278	321-0481-07			RES,FXD,FILM:1M OHM,0.1%,0.125W,TC=T9	19701	5033RE1M000B
A17R279	321-0481-07			RES,FXD,FILM:1M OHM,0.1%,0.125W,TC=T9	19701	5033RE1M000B
A17R297	321-0245-00			RES,FXD,FILM:3.48K OHM,1%,0.125W,TC=TO	19701	5033ED3K48F
A17R300	311-2236-00			RES,VAR,NONW:TRMR,20K OHM,20%,0.5W LINEAR	TK1450	GF06UT 20K
A17R305	311-2234-00			RES,VAR,NONW:TRMR,5K OHM,20%,0.5W LINEAR	TK1450	GF06UT 5K
A17R315	313-1512-00			RES,FXD,FILM:5.1K OHM,5%,0.2W	57668	TR20JE 5K1
A17R393	315-0102-00	B010100	B010696	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A17R393	315-0102-03	B010697		RES,FXD,CMPSN:1K OHM,5%,0.25W (STANDARD ONLY)	01121	CB1025
A17R393	315-0102-03			RES,FXD,CMPSN:1K OHM,5%,0.25W (2440M ONLY)	01121	CB1025
A17R395	321-0271-00			RES,FXD,FILM:6.49K OHM,1%,0.125W,TC=TO	07716	CEAD64900F
A17R400	311-2236-00			RES,VAR,NONW:TRMR,20K OHM,20%,0.5W LINEAR	TK1450	GF06UT 20K
A17R442	313-1331-00			RES,FXD,FILM:330 OHM,5%,0.2W	57668	TR20JE 330E
A17R443	315-0162-00			RES,FXD,FILM:1.6K OHM,5%,0.25W	19701	5043CX1K600J
A17R500	313-1512-00			RES,FXD,FILM:5.1K OHM,5%,0.2W	57668	TR20JE 5K1
A17R543	313-1393-00			RES,FXD,FILM:39K OHM,5%,0.2W	57668	TR20JE 39K
A17R546	313-1201-00			RES,FXD,FILM:200 OHM,5%,0.2W	57668	TR20JE200E
A17R620	313-1220-00			RES,FXD,FILM:22 OHM,5%,0.2W	57668	TR20JE22E
A17R642	321-0407-00			RES,FXD,FILM:169K OHM,1%,0.125W,TC=TO	07716	CEAD16902F
A17R643	313-1103-00			RES,FXD,FILM:10K OHM,5%,0.2W	57668	TR20JE10K0
A17R644	313-1224-00			RES,FXD,FILM:220K,5%,0.2W	57668	TR20JE 220K
A17R645	321-0463-00			RES,FXD,FILM:649K OHM,1%,0.125W	19701	5033YD649K0F
A17R689	322-3438-00			RES,FXD,FILM:357K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 357K
A17R690	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A17R691	315-0102-00	B010100	B010696	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A17R691	315-0102-03	B010697		RES,FXD,CMPSN:1K OHM,5%,0.25W (STANDARD ONLY)	01121	CB1025
A17R691	315-0102-03			RES,FXD,CMPSN:1K OHM,5%,0.25W (2440M ONLY)	01121	CB1025
A17R693	315-0102-00	B010100	B010696	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A17R693	315-0102-03	B010697		RES, FXD, CMPSN:1K OHM, 5%, 0.25W (STANDARD ONLY)	01121	CB1025
A17R693	315-0102-03			RES, FXD, CMPSN:1K OHM, 5%, 0.25W (2440M ONLY)	01121	CB1025
A17R694	315-0102-00	B010100	B010696	RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A17R694	315-0102-03	B010697		RES, FXD, CMPSN:1K OHM, 5%, 0.25W (STANDARD ONLY)	01121	CB1025
A17R694	315-0102-03			RES, FXD, CMPSN:1K OHM, 5%, 0.25W (2440M ONLY)	01121	CB1025
A17T525	120-1548-00			TRANSFORMER, RF: HIGH VOLTAGE	80009	120-1548-00
A17U168	156-0158-07			MICROCKT, LINEAR: DUAL OPNL AMPL, SCREENED	01295	MC1458JG4
A17U227	155-0294-00			MICROCKT, LINEAR: Z-AXIS AMPL W/AUTO FOCUS	80009	155-0294-00
A17VR210	152-0285-00			SEMICON DVC, DI: ZEN, SI, 62V, 5%, 0.4W, DO-7	04713	1N980B
A17VR316	152-0243-00			SEMICON DVC, DI: ZEN, SI, 15V, 5%, 0.4W, DO-7	14433	Z5412
A17W175	175-9231-01			CA ASSY, SP, ELEC: 7, 26 AWG, 2.75 L, RIBBON	TK1544	ORDER BY DESCR

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A18	670-7280-00			CIRCUIT BD ASSY:SCALE ILLUM	80009	670-7280-00
A18DS100	150-0057-01			LAMP, INCAND:5V, 0.115A, WIRE LD, AGED & SEL	71744	7153 AS 15
A18DS101	150-0057-01			LAMP, INCAND:5V, 0.115A, WIRE LD, AGED & SEL	71744	7153 AS 15
A18DS102	150-0057-01			LAMP, INCAND:5V, 0.115A, WIRE LD, AGED & SEL	71744	7153 AS 15

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A30	671-0367-00			CIRCUIT BD ASSY:CCD OUT	80009	671-0367-00
A30C114	281-0798-00			CAP, FXD, CER DI:51PF, 1%, 100V	04222	MA101A510GAA
A30C115	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A30C116	281-0909-00			CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A30C121	281-0798-00			CAP, FXD, CER DI:51PF, 1%, 100V	04222	MA101A510GAA
A30J115	131-4553-00			CONN, RCPT, ELEC:HEADER, RTANG, 1 X 5, 0.1 CTR (QUANTITY OF 4)	80009	131-4553-00
A30J115	131-4554-00			CONN, RCPT, ELEC:HEADER, RTANG, 1 X 8, 0.1 CTR (QUANTITY OF 4)	80009	131-4554-00
A30Q111	151-0341-00			TRANSISTOR:NPN, SI, TO-106	04713	SPS6919
A30Q112	151-0341-00			TRANSISTOR:NPN, SI, TO-106	04713	SPS6919
A30Q128	151-0341-00			TRANSISTOR:NPN, SI, TO-106	04713	SPS6919
A30Q129	151-0341-00			TRANSISTOR:NPN, SI, TO-106	04713	SPS6919
A30R111	322-3193-00			RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A30R112	322-3175-00			RES, FXD, FILM:649 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 649E
A30R113	322-3145-00			RES, FXD, FILM:316 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 316E
A30R114	322-3145-00			RES, FXD, FILM:316 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 316E
A30R115	322-3193-00			RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A30R116	322-3193-00			RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A30R117	313-1821-00			RES, FXD, FILM:820 OHM, 5%, 0.2W	57668	TR20JE 820E
A30R118	313-1100-00			RES, FXD, FILM:10 OHM, 5%, 0.2W	57668	TR20JE10E0
A30R120	322-3193-00			RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A30R121	313-1821-00			RES, FXD, FILM:820 OHM, 5%, 0.2W	57668	TR20JE 820E
A30R122	313-1100-00			RES, FXD, FILM:10 OHM, 5%, 0.2W	57668	TR20JE10E0
A30R123	313-1751-00			RES, FXD, FILM:750 OHM, 5%, 0.2W	57668	TR20JE 750E
A30R124	313-1751-00			RES, FXD, FILM:750 OHM, 5%, 0.2W	57668	TR20JE 750E
A30R125	322-3145-00			RES, FXD, FILM:316 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 316E
A30R126	322-3193-00			RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A30R127	322-3145-00			RES, FXD, FILM:316 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 316E
A30R128	322-3193-00			RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A30R129	322-3175-00			RES, FXD, FILM:649 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 649E
A30U111	156-3293-00			MICROCKT, LINEAR:NPN MONOLITHIC XSTR ARRAY	80009	156-3293-00
A30U118	156-1272-00			MICROCKT, LINEAR:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A30U125	156-3293-00			MICROCKT, LINEAR:NPN MONOLITHIC XSTR ARRAY	80009	156-3293-00

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A31	671-0367-00		CIRCUIT BD ASSY:CCD OUT	80009	671-0367-00
A31C114	281-0798-00		CAP,FXD,CER DI:51PF,1%,100V	04222	MA101A510GAA
A31C115	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A31C116	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A31C121	281-0798-00		CAP,FXD,CER DI:51PF,1%,100V	04222	MA101A510GAA
A31J115	131-4553-00		CONN,RCPT,ELEC:HEADER,RTANG,1 X 5,0.1\CTR (QUANTITY OF 4)	80009	131-4553-00
A31J115	131-4554-00		CONN,RCPT,ELEC:HEADER,RTANG,1 X 8,0.1 CTR (QUANTITY OF 4)	80009	131-4554-00
A31Q111	151-0341-00		TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A31Q112	151-0341-00		TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A31Q128	151-0341-00		TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A31Q129	151-0341-00		TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A31R111	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A31R112	322-3175-00		RES,FXD,FILM:649 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 649E
A31R113	322-3145-00		RES,FXD,FILM:316 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 316E
A31R114	322-3145-00		RES,FXD,FILM:316 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 316E
A31R115	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A31R116	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A31R117	313-1821-00		RES,FXD,FILM:820 OHM,5%,0.2W	57668	TR20JE 820E
A31R118	313-1100-00		RES,FXD,FILM:10 OHM,5%,0.2W	57668	TR20JE10E0
A31R120	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A31R121	313-1821-00		RES,FXD,FILM:820 OHM,5%,0.2W	57668	TR20JE 820E
A31R122	313-1100-00		RES,FXD,FILM:10 OHM,5%,0.2W	57668	TR20JE10E0
A31R123	313-1751-00		RES,FXD,FILM:750 OHM,5%,0.2W	57668	TR20JE 750E
A31R124	313-1751-00		RES,FXD,FILM:750 OHM,5%,0.2W	57668	TR20JE 750E
A31R125	322-3145-00		RES,FXD,FILM:316 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 316E
A31R126	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A31R127	322-3145-00		RES,FXD,FILM:316 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 316E
A31R128	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A31R129	322-3175-00		RES,FXD,FILM:649 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 649E
A31U111	156-3293-00		MICROCKT,LINER:NPN MONOLITHIC XSTR ARRAY	80009	156-3293-00
A31U118	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A31U125	156-3293-00		MICROCKT,LINER:NPN MONOLITHIC XSTR ARRAY	80009	156-3293-00

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A32	671-0367-00		CIRCUIT BD ASSY:CCD OUT	80009	671-0367-00
A32C114	281-0798-00		CAP, FXD, CER DI:51PF, 1%, 100V	04222	MA101A510GAA
A32C115	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A32C116	281-0909-00		CAP, FXD, CER DI:0.022UF, 20%, 50V	54583	MA12X7R1H223M-T
A32C121	281-0798-00		CAP, FXD, CER DI:51PF, 1%, 100V	04222	MA101A510GAA
A32J115	131-4553-00		CONN, RCPT, ELEC:HEADER, RTANG, 1 X 5, 0.1 CTR (QUANTITY OF 4)	80009	131-4553-00
A32J115	131-4554-00		CONN, RCPT, ELEC:HEADER, RTANG, 1 X 8, 0.1 CTR (QUANTITY OF 4)	80009	131-4554-00
A32Q111	151-0341-00		TRANSISTOR:NPN, SI, TO-106	04713	SPS6919
A32Q112	151-0341-00		TRANSISTOR:NPN, SI, TO-106	04713	SPS6919
A32Q128	151-0341-00		TRANSISTOR:NPN, SI, TO-106	04713	SPS6919
A32Q129	151-0341-00		TRANSISTOR:NPN, SI, TO-106	04713	SPS6919
A32R111	322-3193-00		RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A32R112	322-3175-00		RES, FXD, FILM:649 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 649E
A32R113	322-3145-00		RES, FXD, FILM:316 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 316E
A32R114	322-3145-00		RES, FXD, FILM:316 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 316E
A32R115	322-3193-00		RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A32R116	322-3193-00		RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A32R117	313-1821-00		RES, FXD, FILM:820 OHM, 5%, 0.2W	57668	TR20JE 820E
A32R118	313-1100-00		RES, FXD, FILM:10 OHM, 5%, 0.2W	57668	TR20JE10E0
A32R120	322-3193-00		RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A32R121	313-1821-00		RES, FXD, FILM:820 OHM, 5%, 0.2W	57668	TR20JE 820E
A32R122	313-1100-00		RES, FXD, FILM:10 OHM, 5%, 0.2W	57668	TR20JE10E0
A32R123	313-1751-00		RES, FXD, FILM:750 OHM, 5%, 0.2W	57668	TR20JE 750E
A32R124	313-1751-00		RES, FXD, FILM:750 OHM, 5%, 0.2W	57668	TR20JE 750E
A32R125	322-3145-00		RES, FXD, FILM:316 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 316E
A32R126	322-3193-00		RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A32R127	322-3145-00		RES, FXD, FILM:316 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 316E
A32R128	322-3193-00		RES, FXD, FILM:1K OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 1K00
A32R129	322-3175-00		RES, FXD, FILM:649 OHM, 1%, 0.2W, TC=TO	57668	CRB20 FXE 649E
A32U111	156-3293-00		MICROCKT, LINEAR:NPN MONOLITHIC XSTR ARRAY	80009	156-3293-00
A32U118	156-1272-00		MICROCKT, LINEAR:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A32U125	156-3293-00		MICROCKT, LINEAR:NPN MONOLITHIC XSTR ARRAY	80009	156-3293-00

Replaceable Electrical Parts - 2440 Service

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Discort	Name & Description	Mfr. Code	Mfr. Part No.
A33	671-0367-00		CIRCUIT BD ASSY:GCD OUT	80009	671-0367-00
A33C114	281-0798-00		CAP,FXD,CER DI:51PF,1%,100V	04222	MA101A510GAA
A33C115	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A33C116	281-0909-00		CAP,FXD,CER DI:0.022UF,20%,50V	54583	MA12X7R1H223M-T
A33C121	281-0798-00		CAP,FXD,CER DI:51PF,1%,100V	04222	MA101A510GAA
A33J115	131-4553-00		CONN,RCPT,ELEC:HEADER,RTANG,1 X 5,0.1 CTR (QUANTITY OF 4)	80009	131-4553-00
A33J115	131-4554-00		CONN,RCPT,ELEC:HEADER,RTANG,1 X 8,0.1 CTR (QUANTITY OF 4)	80009	131-4554-00
A33Q111	151-0341-00		TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A33Q112	151-0341-00		TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A33Q128	151-0341-00		TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A33Q129	151-0341-00		TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A33R111	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A33R112	322-3175-00		RES,FXD,FILM:649 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 649E
A33R113	322-3145-00		RES,FXD,FILM:316 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 316E
A33R114	322-3145-00		RES,FXD,FILM:316 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 316E
A33R115	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A33R116	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A33R117	313-1821-00		RES,FXD,FILM:820 OHM,5%,0.2W	57668	TR20JE 820E
A33R118	313-1100-00		RES,FXD,FILM:10 OHM,5%,0.2W	57668	TR20JE10E0
A33R120	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A33R121	313-1821-00		RES,FXD,FILM:820 OHM,5%,0.2W	57668	TR20JE 820E
A33R122	313-1100-00		RES,FXD,FILM:10 OHM,5%,0.2W	57668	TR20JE10E0
A33R123	313-1751-00		RES,FXD,FILM:750 OHM,5%,0.2W	57668	TR20JE 750E
A33R124	313-1751-00		RES,FXD,FILM:750 OHM,5%,0.2W	57668	TR20JE 750E
A33R125	322-3145-00		RES,FXD,FILM:316 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 316E
A33R126	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A33R127	322-3145-00		RES,FXD,FILM:316 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 316E
A33R128	322-3193-00		RES,FXD,FILM:1K OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 1K00
A33R129	322-3175-00		RES,FXD,FILM:649 OHM,1%,0.2W,TC=TO	57668	CRB20 FXE 649E
A33U111	156-3293-00		MICROCKT,LINER:NPN MONOLITHIC XSTR ARRAY	80009	156-3293-00
A33U118	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A33U125	156-3293-00		MICROCKT,LINER:NPN MONOLITHIC XSTR ARRAY	80009	156-3293-00

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
B1000	119-1770-01			FAN, TUBE AXIAL: 12V, 1.72 W, 42 CFM W/CONN	80009	119-1770-01
F1000	159-0014-00			FUSE, CARTRIDGE: 3AG, 5A, 250V, 0.8SEC	71400	MTH-CW-5
FL1000	119-1306-00			FILTER, RFI: 6A, 250V, 50-400HZ	56289	6JX5431A
J1900	131-0955-00			CONN, RCPT, ELEC: BNC, FEMALE	13511	31-279
J1901	131-0955-00			CONN, RCPT, ELEC: BNC, FEMALE	13511	31-279
J1902	131-0955-00			CONN, RCPT, ELEC: BNC, FEMALE	13511	31-279
J1903	131-0955-00			CONN, RCPT, ELEC: BNC, FEMALE	13511	31-279
J1904	131-0955-00			CONN, RCPT, ELEC: BNC, FEMALE	13511	31-279
J1905	131-0955-00			CONN, RCPT, ELEC: BNC, FEMALE	13511	31-279
J1906	131-0955-00			CONN, RCPT, ELEC: BNC, FEMALE	13511	31-279
J1907	175-9229-00			CA ASSY, SP, ELEC: 24, 28 AWG, 7.0 L, RIBBON	80009	175-9229-00
J1908	131-1471-00			CONN, RCPT, ELEC: RA, 3 EA MALE & FEMALE CONT	C0130	RA1306
J1909	131-0771-00			CONN, RCPT, ELEC: 2 MALE, 2 FEM, PNL MT W/O HDW (OPTION 11 ONLY)	91836	1904-2M58
J2000	131-0771-00			CONN, RCPT, ELEC: 2 MALE, 2 FEM, PNL MT W/O HDW (OPTION 11 ONLY)	91836	1904-2M58
L1000	119-1478-01			COIL, TUBE DEFL: FXD, TRACE ROTATION	80009	119-1478-01
P174	175-9356-00			CA ASSY, SP, ELEC: 5, 26 AWG, 22.75 L, RIBBON	80009	175-9356-00
R1000	301-0474-00			RES, FXD, FILM: 470K OHM, 5%, 0.5W	19701	5053CX470KD
R1077	311-1845-00			RES, VAR, NONWW: PNL, 5K OHM, 0.5W	01121	W8355
R1088	311-1845-00			RES, VAR, NONWW: PNL, 5K OHM, 0.5W	01121	W8355
R1099	311-1845-00			RES, VAR, NONWW: PNL, 5K OHM, 0.5W	01121	W8355
R1121	311-2248-00			RES, VAR, NONWW: PNL, (2)10K OHM, 20%, 0.5W	12697	CM43462
S1000	260-1967-00			SWITCH, SLIDE: DPDT 5A/250V 10A/125V MKD	TK0935	4021.0512
S1350	260-2202-00			SWITCH, PUSH: DPDT, 5A, 250VAC	31918	N30 51870
S1666	260-2173-00			SW, PUSH BUTTON: MOMENTARY, 5 BUTTON	61545	CP85-41313
V1000	154-0850-01			CRT ASSEMBLY: FINISHED 2445	80009	154-0850-01

