




Series  
TCX

SIZE 12 CRIMP REMOVABLE PIN CONTACT  
JN1123 C P 12

Issue:  
01 MARCH 2002

Page  
1 / 1

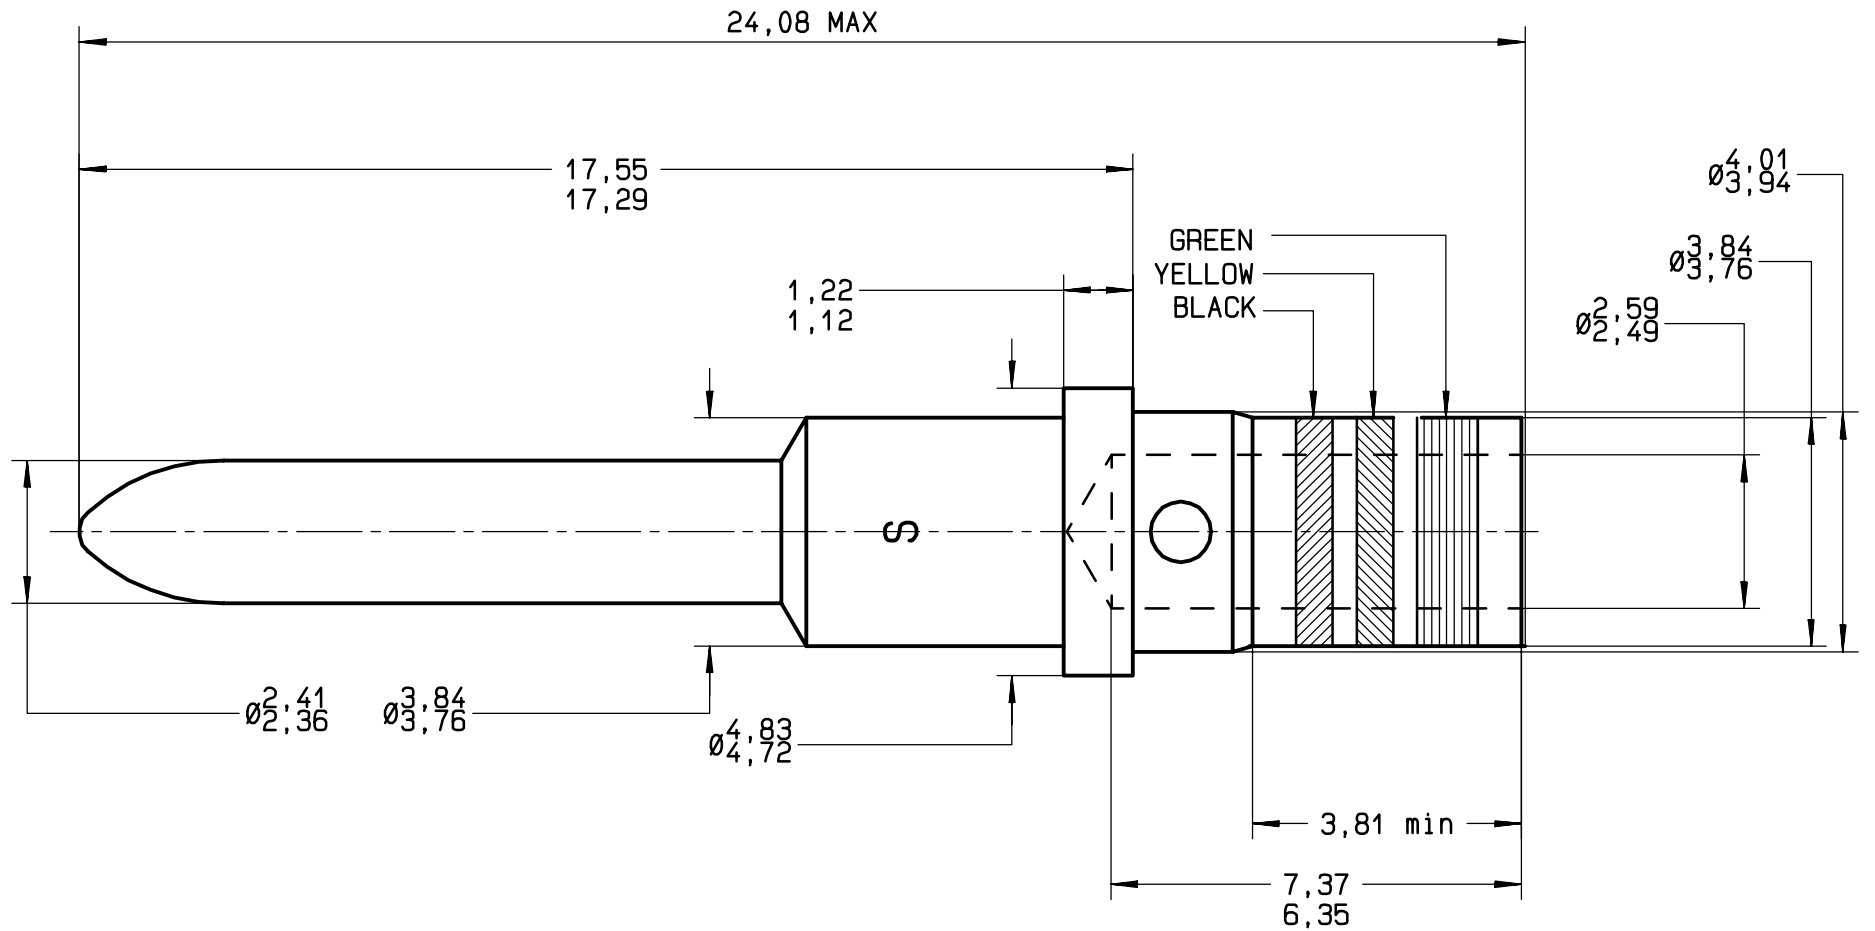

MATERIAL : LEADED NICKEL COPPER (C97)

FINISH : .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D  
CLASS 1 OVER NICKEL PER QQ-N-290

WIRES ACCOMODATED : AWG 12-14  
INSULATEUR DIAMETER : 2,90 MAX - 2,31 MIN  
STRIP LENGTH : 6,0

TOOLING :  
CRIMPING TOOL : M22520/1-01 RADIALL 282 291  
SELECTOR POSITION : 8 FOR AWG 12  
7 FOR AWG 14

POSITIONER : M22520/1-11 RADIALL 282 579  
INSERTION AND EXTRACTION TOOL : M81969/28-02 RADIALL 282 547

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610

CREATION	.	.	.	.
PEN: M970106323A	.	.	.	.
NOM: COUTHON	.	.	.	.
DATE: 01 MARCH 2002	.	.	.	.
APPR.: .	.	.	.	.
Issue	Revisions		Name	Approved

**RADIALL**<sup>®</sup>

101, rue Philibert Hoffmann Z.I. Ouest  
93116 ROSNY/BOIS Cedex (France)  
Tl.: 01 49 35 35 35  
Fax.: 01 48 54 63 63  
Tlax: RADIA 235220