

# Program Description

SIGMA 7/9, XEROX 560 CP-V

AUTHOR: XEROX (NOVEMBER, 1974)

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
1.0	PRODUCT DESCRIPTION	5
1.1	PURPOSE	5
1.2	FEATURES	5
1.2.1	Transaction Processing	5
1.2.2	XEROX 560 Support	6
1.2.3	Boot Time Reconfiguration and Partitioning	7
1.2.4	Real Time, Phase II	8
1.2.5	File Management Enhancements	8
1.2.5.1	Restructuring of OPEN Overlay	8
1.2.5.2	Link Fixing Ghost	9
1.2.5.3	Execute Only Files	9
1.2.5.4	Shared Update Keyed Files	9
1.2.5.5	Redundant Directories	9
1.2.6	Monitor Size Reduction and Performance Improvements	10
1.2.6.1	Monitor Reference Mode	10
1.2.6.2	Unmapped Monitor "Overlay"	10
1.2.6.3	Miscellaneous Size Reductions	10
1.2.6.4	Swapper Enhancement	10

1.2.7	Security Enhancements	10
1.2.7.1	Memory Page Cleaning	10
1.2.7.2	Granule Cleaning	11
1.2.8	New Device Support	11
1.2.9	ELLA, Error Log Lister and Analysis	11
1.2.10	On-Line Diagnostic Test System	11
1.2.11	Symbiont Enhancements	12
1.2.12	SHOW Processor	12
1.2.13	RMA Enhancements	12
1.2.14	Restricted Processor List	13
1.2.15	SYSGEN Modifications	13
1.3	UNANNOUNCED FEATURES	14
1.3.1	BACKUP/FILL Enhancements	14
1.3.2	FSAVE/FRES Enhancements	14
1.3.3	On-Line GENMD Processor	14
1.4	SUPPORTING PUBLICATIONS	15
2.0	HARDWARE CONFIGURATION	16
3.0	SIDRS CLOSED	17
4.0	RELEASE CONTENTS	27
4.1	C00 RELEASE TAPES	27
4.1.1	:C00CI	27
4.1.2	:C00SI	27
4.1.3	:C00BO	27
4.1.4	3531SYS	30
4.1.5	COBLIB	31
4.1.6	RPGLIB	31

4.1.7	SORTLIB	31
4.1.8	CDGBLIB	31
4.1.9	X	31
4.2	STARTER SYSTEMS	32
4.3	-11	33
4.4	-91	33
4.5	TEST TAPE	33
4.6	COMPRESSED LISTING TAPE	33
4.7	VOLINIT	33
4.8	-02 ELEMENT, UNPUBLISHED TECHNICAL DOCUMENTATION	34
5.0	SYSGEN CONSIDERATIONS	35
5.1	INTRODUCTION	35
5.2	PASS2 CHANGES	35
5.3	PASS3 CHANGES	36
5.4	M:MON LOCCT CHANGES	37
5.5	HOW TO SYSGEN CP-V C00	37
5.6	HOW TO DO A SYSGEN ON AND FOR A 64K MACHINE	39
5.7	HOW TO DO A SYSGEN WITH NO COC	39
5.8	HOW TO DO A SYSGEN FOR CP-V C00 UNDER CP-V B00	40
6.0	INCOMPATIBILITIES	71
6.1	SPECIAL SHARED PROCESSORS	71
6.2	PRE-B00 LOAD MODULES	72
6.3	OTHER PRE-B00 INCOMPATIBILITIES	72
7.0	RESTRICTIONS/KNOWN PROBLEMS	74
7.1	DRSP	74

7.2	PROCESSOR SIZE LIMITATION	74
8.0	MAINTENANCE PROCEDURES	75
8.1	PATCH DECK	75
8.2	SPECIAL PATCHING PROCEDURES	75
8.3	PROBLEM REPORTING	76
9.0	MONITOR SIZING	78
9.1	GENERAL CORE REQUIREMENTS	78
9.2	MONITOR SIZE CHANGES BASED ON SYSGEN PROCEDURES	80
10.0	CP-V C00 TEST PROCEDURES	82
10.1	THE TEST TAPE	82
10.2	USE OF THE TEST TAPE	83
10.3	UPDATING THE TEST TAPE	84

## 1.0 PRODUCT DESCRIPTION

### 1.1 PURPOSE

The purpose of the C00 release of CP-V is to provide for distribution to the field a major development release, including Transaction Processing (the fifth facet of CP-V) and Xerox 560 support. Fifteen CP-V development projects and 402 SIDR fixes are included with this release.

### 1.2 FEATURES

The major features of CP-V C00 are described below.

#### 1.2.1 Transaction Processing

The C00 version of CP-V supports Transaction Processing (TP). TP consists of a collection of general purpose processors and supporting CP-V monitor services. TP is designed to enable the entry of business transactions from their point of origin to a centralized data base. It enables output reports to be generated by user-created application modules for distribution to the originating station or to alternative stations.

TP includes the extended communications software to enable a single processing program to communicate with multiple remote terminals. It allows for optional journalization of all transactions and is designed for "fail safe" operation with minimal impact on the user at his remote station.

The TP processors provide a complete interface between the remote terminal and installation-supplied transaction processing application modules. In TP, emphasis is placed on protection provided by the system. Application programs are coded in traditional fashion and protection devices are provided centrally within the system. The protection and control features below are provided by TP:

- User terminals are authorized by a log-on procedure which controls access to TP elements.
- A received transaction is optionally journalized so that it will not be lost if an error occurs somewhere between its arrival and its processing.
- The application program may generate a journal record of data base changes so that any changes made by an aborted transaction may be undone or a damaged data base may be restored.

- o Delivery of output reports is delayed until the transaction is successfully processed.

TP programs execute as independent jobs. The programs provided by Xerox include the following in addition to CP-V monitor services:

- o A TP control program (TPG)
- o A Terminal Interface Controller (TIC)
- o A Transaction Processing Controller (TPC)
- o TP Supporting Utilities

The Xerox TP system is fully described in the CP-V Transaction Processing Reference Manual (90 31 12).

#### 1.2.2

#### Xerox 560 Support

The C00 version of CP-V will be available at the time of the first XEROX 560 shipment and fully supports all standard peripherals available on the XEROX 560. CP-V support of the 560 is functionally identical to the system offered on the SIGMA series of computers. All five modes of CP-V are supported with no user-visible differences in operation. User programs written for SIGMA computers will operate in a compatible manner on the XEROX 560, except in cases where unique hardware considerations (e.g., hardware cycle times or special device configurations) are a factor.

The major enhancements to CP-V for the XEROX 560 are in the area of Reliability, Maintainability, and Availability. The C00 version of CP-V includes a new hardware fault handler which makes the most advantageous use of the error detection and reporting facilities of both SIGMA and 560 computers.

New features of the XEROX 560 in the area of error detection and reporting utilized and supported by CP-V are the following.

##### 1.2.2.1

##### Error Detection

New software and hardware features on the XEROX 560 allow for the following:

- o Inter-unit parity checking and reporting
- o Memory error detection and reporting

- o Register block parity checking and reporting
- o System control memory error detection and reporting
- o Control sequence fault detection and reporting
- o Critical system failure recovery (i.e., power on/off)

The net result is superior detection, processing, and reporting of hardware faults and errors which, in turn, will allow faster isolation and repair of faulty hardware components.

#### 1.2.2.2 Write Lock Protection

CP-V utilizes the real memory I/O write lock protection feature of the 560 to prevent the resident portions of the system from being overwritten due to erroneous I/O requests.

#### 1.2.2.3 Remote Assist Terminal Facility

CP-V supports the Channel B (Remote Assist Terminal) to allow on-line system troubleshooting by remotely located maintenance personnel. Using this facility, maintenance personnel can monitor a CP-V system on the 560 and determine if any corrective action should be initiated based on fault and error data collected during operation of the system.

#### 1.2.2.4 Power Fail Safe Feature

CP-V supports the XEROX 560 power fail safe trap in the following manner:

- o For primary power interruptions of less than 500 msec duration, power fail safe will be processed exactly as implemented on the SIGMA computers.
- o For interruptions greater than 500 msec duration, manual operator intervention to simulate a power fail safe trap will be required, after which processing will be as implemented in CP-V on the SIGMA computers.

#### 1.2.3 Boot Time Reconfiguration and Partitioning

Boot time reconfiguration and partitioning is a procedure which determines the hardware's peripheral configuration and then removes or partitions specified devices and/or

controllers from the system when they are faulty, non-existent, or unavailable. The boot time reconfiguration commands define the hardware addresses and device types or remove non-existent devices. The boot time partitioning command temporarily removes unavailable devices (which may be returned during operation of the system via SYSCON). These procedures allow for the boot time process to change or remove devices and to partition unavailable devices. This is especially useful if the system is built for devices which are not currently present on the system but will be available in the future. It also allows a system to be moved from one hardware configuration to another similar configuration.

## 1.2.4

Real Time Phase II

The real time processing introduced in CP-V B00 has been enhanced for C00 to provide more services for both the unmapped user and the mapped, centrally-connected user. These enhancements can be grouped into three new features: (1) Extended I/O facilities for the mapped real time user, including I/O device pre-emption and end-action control at the time of the I/O interrupt; (2) Dynamic physical page acquisition which allows the size and location of the reserved resident foreground memory to be changed during operation of the system; and (3) Real time user control of the operating mode of the CPU is provided by a MASTER/SLAVE service. This service sets the real time user PSD to master mode (master protected mode on the SIGMA 9 and XEROX 560) with a write key of 1, or back to SLAVE mode.

## 1.2.5

File Management Enhancements

A number of enhancements to file management are included in the C00 release of CP-V. These are intended to improve the security and reliability of the CP-V file system.

## 1.2.5.1

## Restructuring of the OPEN Monitor Overlay

Due to the evolutionary growth of file management capabilities in CP-V, the monitor overlays associated with OPEN have been restructured to allow for future enhancements. The tape open logic has been separated from the disk file open, and the associated regrouping of functions reduces monitor overhead and provides growing room for new M:OPEN options.

#### 1.2.5.2 Link Fixing Ghost (FIX)

A new CP-V Ghost haunts the system to perform consistency checks and (optionally) to repair files for which a 75 type error has been detected. FIX also is used, under operator control, to release or delete files. The repair mechanism of FIX is triggered by batch or on-line users with the required privilege. Under operator control, FIX will delete a specified file or all files in a specified account with or without granule release. FIX replaces the current HGPRECON.

#### 1.2.5.3 Execute Only Files

A new file access attribute has been added to CP-V to provide Execute Only file support. The new access attribute adds Execute Accounts to the existing Read Accounts and Write Accounts. The intent of this enhancement is to provide an installation the capability to permit the execution of proprietary programs while restricting the ability to copy or examine them.

#### 1.2.5.4 Shared Update Keyed Files

Shared Keyed Files have become a standard feature in CP-V C00. This enhancement allows users to perform, in the shared mode, any operation which would be legal for a single update user. The enhancement performs buffer truncations following an M:WRITE or M:DELREC operation, and at the beginning of a CAL only when the contents of the file have changed since the buffers were established. Update in place restrictions have been removed. It is the responsibility of the users to follow the enqueue/dequeue protocol to enforce proper staging of operations and thereby insure data integrity. CP-V will only insure that the master index structure is not modified so as to produce a file inconsistency.

#### 1.2.5.5 Redundant Directories

In order to insure that directory inconsistencies are virtually eliminated from CP-V operations, a second copy of each public directory granule will be maintained at a physically separated location (i.e., separate devices if available, separate cylinders or tracks if not). The format of the directories is changed to accommodate a dual FLINK/BLINK pair and the new account directory format holds 126 entries, compared to 96 in the previous format.

## 1.2.6 Monitor Size Reduction and Performance Improvements

### 1.2.6.1 Monitor Reference Mode

This enhancement to CP-V is designed to enable increased flexibility in the structuring of the monitor. It will enable, with some exceptions, various modules to exist as elements of the monitor root, or as overlays of the monitor without affecting the code of the modules involved. Intermodule communication is independent of the module's status as a root or overlay module. Although this enhancement is not widely used in the C00 version of CP-V, it lays the groundwork for significant future reductions in the resident size of the CP-V monitor. This feature involves some significant changes in the procedures for a CP-V Sysgen and they are described in Chapter 5 of this document, the System Management Reference Manual, and the -91 Manual Updates document.

### 1.2.6.2 Unmapped Monitor "Overlay"

This enhancement provides a general method to remove code which always operates unmapped (such as handlers and the swapper) out of the monitor root to a resident area <sup>far above himaus</sup> beyond the 32K virtual limit. This feature is beneficial to large scale CP-V systems containing TP, IRBT, Real-Time, etc.

### 1.2.6.3 Miscellaneous Size Reductions

Monitor size reductions have been performed in the areas of memory management, file management, private pack handling, and error logging.

### 1.2.6.4 Swapper Enhancement

The swap scheduling overhead has been reduced by selectively releasing shared processor memory based on relative frequency of use.

## 1.2.7 Security Enhancements

### 1.2.7.1 Memory Page Cleaning

This enhancement to CP-V C00 insures that any page acquired by a user is free of vital or sensitive information remaining in the page from a previous usage.

### 1.2.7.2 Granule Cleaning

This enhancement to CP-V C00 insures that any granules acquired by a user for a random file are free of vital or sensitive information remaining in the granule from a previous usage.

### 1.2.8 New Device Support

New devices supported in CP-V C00 are the new peripherals developed for the XEROX 560.

#### 1.2.8.1 NS RAD (Model #3214)

CP-V supports this device on XEROX 560 configurations only.

#### 1.2.8.2 NS 75/125 IPS Magnetic Tapes (Model #3345 and 3347)

CP-V supports these devices on XEROX 560 configurations only.

Support for other XEROX 560 peripherals will be announced as devices become available.

### 1.2.9 ELLA, Error Log Lister and Analysis

ELLA is a new Error Log Lister and Analysis program which can be run in the batch, ghost, and on-line modes. It offers new capabilities which allow selective display of the error log in chronological or sorted sequences or summary form according to pre-selected limits and parameters such as date, time, type of error log record, type of device, and model number.

### 1.2.10 On-Line Diagnostic Test System

OLTEST is a common central program which has the necessary interface capability to execute Functional Diagnostic Programs while CP-V is running. Using this tool, diagnosing and isolating hardware failures and performing preventative maintenance tests can be accomplished without dedicating the entire system for these functions. The devices which may be tested using this system are card readers, card punches, line printers and magnetic tapes. This system is available as OLTEST (706497-A00) and is not included with the CP-V C00 release.

### 1.2.11 Symbiont Enhancements

The following symbiont enhancements have been included:

- o RERUN option on !LIMIT command
- o Granule count as an attribute of output symbiont files
- o Operator control of JOBENT batch job
- o Job origin as a partition attribute
- o Elimination of bannerless printout
- o !RBDEV command which lists the current device status and the !RBIINFO command which lists the values of various system parameters.

### 1.2.12 SHOW Processor

The SHOW processor allows an on-line or batch user to display the following information:

- o Logon data
- o Privilege level
- o Authorized resources and current usage
- o Current DCB assignments

### 1.2.13 RMA Enhancements

Several minor enhancements in the Recovery, ALLYCAT, and Error Log areas have been made to improve overall system reliability. Listed below are the enhancements which have been included:

- o ALLYCAT HGP data is checksummed before ALLYCAT goes to sleep and just after ALLYCAT wakes up. This ensures that if ALLYCAT's data has been destroyed it will be detected before catastrophic allocations of disk space are allowed.
- o The code to save and restore tables in Recovery has been reduced in size.
- o Contents of core starting at x'4000' is dumped before it is destroyed by Recovery so that ANLZ dumps will show the true contents of these locations.

- o RVGHOST utilizes I/O buffering to improve its speed.
- o The Power Fail Safe recovery routines have been enhanced to reflect current Field Engineering philosophy on correct Power Fail Safe Trap/Interrupt handling. These enhancements represent a more failsafe approach to handling the known peculiarities of power failures.
- o The modules ERRLOG, RDERLOG, and ERR:FIL have been enhanced to correct some of the errors and performance problems discovered in CP-V B00. Several longstanding SIDRs have been closed in this activity as well.

1.2.14

Restricted Processor List

SUPER authorization is expanded such that a user may be restricted to a set of processors, or from a set of processors on an individual account basis.

1.2.15

SYSGEN Modifications

Modifications to Sysgen processors have been made to support the following major features:

- o XEROX 560 Support
- o 560 Device Support
- o Transaction Processing Support
- o Unmapped and Optional Overlays

New Sysgen procedures are noted in Section 5 of this document.

### 1.3 UNANNOUNCED FEATURES

#### 1.3.1 BACKUP/FILL Enhancements

The operator interface with the FILL processor has been substantially changed in CP-V C00. The operator directs information to FILL with an INT,FILL command rather than having FILL ask for operator responses by itself. The line printer output for BACKUP operations has been modified to provide more information about the file system and to improve readability. Diagnostic code has been added to provide SNAPS when unexpected errors occur in order to enhance its maintainability. The basic FILL operations, however, remain unchanged.

#### 1.3.2 FSAVE/FRES Enhancements

**FSAVE:** The +VOL command has been implemented for CP-V C00 to allow the user to specify a FILL compatible serial number rather than use the one maintained internally in the F:BREC file in :SYS.

**FRES:** The +CHECK command has been implemented for CP-V C00 to allow the user to check the files on a volume created by FSAVE or FILL for errors without restoring the files (i.e., a verify capability).

#### 1.3.3 On-Line GENMD Processor

The GENMD processor that performs load module patching at boot time is now available during normal system operation in ghost, batch, and on-line modes. As a ghost job, input and output is through the OC device with the format the same as during the boot process. As a batch job, input is through the M:C device and output is through M:LL. The format is the same as during the boot process except that the initial LMN may be specified on the processor control card (!GENMD LMN).

As an on-line processor, additional capabilities are available. The M:C DCB may be assigned to a file of patches; the M:SI DCB may be assigned (implicitly or explicitly) to the LMN to be patched; DELTA may be associated to simplify the patching format, and a description of the input format may be obtained by typing a "?".

1.4

## SUPPORTING PUBLICATIONS

The major features of the C00 release of CP-V are described in the following documents:

CP-V SM Reference Manual	90 16 74G
CP-V TS Reference Manual	90 09 07F-1
CP-V BP Reference Manual	90 17 64F
CP-V Transaction Processing Reference Manual	90 31 12A
CP-V OPS Reference Manual	90 16 75G
CP-V Remote Processing Manual	90 30 26B-1
CP-V TS Users Guide	90 16 92D-2
CP-V System Programmers Reference Manual	90 31 13A
CP-V Data Base Technical Manual	90 19 95C

Corrections and updates to these manuals are contained in document 707000-91C00.

2.0

HARDWARE CONFIGURATION

CP-V runs in a minimum configuration of 64K words of memory; however, the minimum requirements are dependent on the options selected (for example, the TP option requires a minimum of 80K memory). Combinations of options may require more than the standard minimum for CP-V.

CP-V supports a larger than 128K memory on both the SIGMA 9 and the XEROX 560. CP-V supports up to a 512K memory on the SIGMA 9, and up to 256K memory on the XEROX 560.

3.0

SIDRS CLOSED

The C00 release of CP-V contains 344 difficulty SIDR fixes and 58 improvement SIDR fixes for a total of 402 SIDRs closed. These SIDRs are itemized on the following pages.

Difficulty SIDRS Closed

09673	CCI
09973	I/O
10034	KEYIN
10108	LNKTRC
10249	DCBS
10290	STEP
10447	PCL
10531	DEBUG
10561	PCL
10969	PRIV PACKS
10970	INITIAL
10971	CENTRAL SYSTEM
11126	CENTRAL SYSTEM
11270	FSAVE
11352	PCL
11362	FSAVE
11365	BPM
11419	DELTA
11540	LOADER
11556	PCL
11641	CCI
11785	PCL
11819	RECOVERY
11844	EDIT
11968	DELTA
11974	CENTRAL SYSTEM
11977	CENTRAL SYSTEM
12044	LINK
12066	FSAVE
12084	PCL
12091	DELTA
12238	CENTRAL SYSTEM
12241	STEP
12263	PCL
12279	CCI
20082	DELTA
20084	CENTRAL SYSTEM
20090	DELTA
20096	HANDLERS
20120	PCL
20144	FRFS
20166	CENTRAL SYSTEM
20216	DELTA
20226	TEL
20267	EDIT
20437	CENTRAL SYSTEM
20446	CENTRAL SYSTEM
20516	PCL
20595	LOADER
20657	LDEV
20668	SYMBIANTS

20872	ERR:LIST
20880	ERR:LIST
21006	CENTRAL SYSTEM
21059	CENTRAL SYSTEM
21192	CENTRAL SYSTEM
21250	CENTRAL SYSTEM
21251	BATCH
21252	CENTRAL SYSTEM
21253	FILL
21254	CENTRAL SYSTEM
21255	ERR:LIST
21256	CENTRAL SYSTEM
21257	HGPRECON
21259	CENTRAL SYSTEM
21260	CENTRAL SYSTEM
21262	CENTRAL SYSTEM
21263	CENTRAL SYSTEM
21264	CENTRAL SYSTEM
21265	DRSP
21266	FILL
21267	PACKRECON
21268	LINK
21269	CENTRAL SYSTEM
21270	CENTRAL SYSTEM
21271	STEP
21272	FILL
21273	CENTRAL SYSTEM
21275	CENTRAL SYSTEM
21278	CENTRAL SYSTEM
21281	CENTRAL SYSTEM
21282	PACKRECON
21284	CENTRAL SYSTEM
21286	DELTA
21287	STEP
21288	CENTRAL SYSTEM
21289	FSAVE
21290	FSAVE
21292	CENTRAL SYSTEM
21293	LDEV
21294	ERRLOG
21296	FILL
21297	CENTRAL SYSTEM
21298	CENTRAL SYSTEM
21299	CENTRAL SYSTEM
21303	CENTRAL SYSTEM
21304	CENTRAL SYSTEM
21305	RUNDOWN
21307	CENTRAL SYSTEM
21309	CENTRAL SYSTEM
21310	SUPER
21311	CENTRAL SYSTEM
21312	CENTRAL SYSTEM
21313	CENTRAL SYSTEM
21314	SYSMAK

21315	CENTRAL SYSTEM
21317	CENTRAL SYSTEM
21318	CENTRAL SYSTEM
21320	CENTRAL SYSTEM
21321	CENTRAL SYSTEM
21322	CENTRAL SYSTEM
21323	CENTRAL SYSTEM
21324	CENTRAL SYSTEM
21325	STEP
21329	CENTRAL SYSTEM
21330	CENTRAL SYSTEM
21331	IRBT
21333	CENTRAL SYSTEM
21334	DELTA
21410	PCL
21426	CENTRAL SYSTEM
21534	CENTRAL SYSTEM
21544	CENTRAL SYSTEM
21636	CCI
21637	CENTRAL SYSTEM
21638	RECOVERY
21639	CENTRAL SYSTEM
21640	FSAVE
21641	CENTRAL SYSTEM
21643	FILL
21645	CENTRAL SYSTEM
21647	CENTRAL SYSTEM
21648	CENTRAL SYSTEM
21649	HANDLERS
21678	CENTRAL SYSTEM
21680	PRIV PACKS
21681	CCI
21683	CENTRAL SYSTEM
21685	CENTRAL SYSTEM
21686	CENTRAL SYSTEM
21687	CENTRAL SYSTEM
21688	CENTRAL SYSTEM
21691	CENTRAL SYSTEM
21692	LOADER
21695	CENTRAL SYSTEM
21697	BATCH
21698	CENTRAL SYSTEM
21699	BATCH
21700	CENTRAL SYSTEM
21701	CENTRAL SYSTEM
21704	CENTRAL SYSTEM
21705	CENTRAL SYSTEM
21708	CENTRAL SYSTEM
21709	CCI
21711	CENTRAL SYSTEM
21712	CENTRAL SYSTEM
21713	CENTRAL SYSTEM
21714	CENTRAL SYSTEM
21718	CENTRAL SYSTEM

21724	FILL
21725	CENTRAL SYSTEM
21728	CENTRAL SYSTEM
21733	LOADER
21734	CENTRAL SYSTEM
21735	CENTRAL SYSTEM
21737	CONTROL
21738	HGPRECON
21739	CENTRAL SYSTEM
21740	CENTRAL SYSTEM
21743	CENTRAL SYSTEM
21744	CENTRAL SYSTEM
21745	CENTRAL SYSTEM
21746	CENTRAL SYSTEM
21747	RECOVERY
21748	CENTRAL SYSTEM
21749	CENTRAL SYSTEM
21751	CENTRAL SYSTEM
21752	CENTRAL SYSTEM
21753	CENTRAL SYSTEM
21754	RECOVERY
21755	LOADER
21756	MOVE CAL
21759	SYSGEN
21760	EDIT
21761	IRBT
21764	SYMBIANTS
21765	IRBT
21767	TEL
21768	TEL
21769	CENTRAL SYSTEM
21770	IRBT
21774	HANDLERS
21777	CENTRAL SYSTEM
21835	PCL
21877	RECOVERY
21909	DEF
21914	PCL
21924	ALLOCAT
21928	CENTRAL SYSTEM
21958	FSAVE
21960	PCL
21965	FSAVE
21969	COC
21989	CENTRAL SYSTEM
21991	CENTRAL SYSTEM
22026	CENTRAL SYSTEM
22031	HGPRECON
22032	HGPRECON
22033	HGPRECON
22034	HGPRECON
22035	PCL
22050	CCI
22076	CENTRAL SYSTEM

22079	CENTRAL SYSTEM
22081	DEF
22096	CENTRAL SYSTEM
22137	CENTRAL SYSTEM
22138	SUPER
22147	CENTRAL SYSTEM
22157	FRES
22158	FRES
22176	DEVDM <sup>P</sup>
22254	CENTRAL SYSTEM
22256	CENTRAL SYSTEM
22267	LDEV
22270	CENTRAL SYSTEM
22272	ERR:FIL
22276	ERR:LIST
22303	SYMBIOTS
22317	LDEV
22319	BATCH
22339	CENTRAL SYSTEM
22368	PURGE
22374	CENTRAL SYSTEM
22375	CO <sup>C</sup>
22378	ANLZ
22421	DRSP
22428	CENTRAL SYSTEM
22438	CENTRAL SYSTEM
22452	ANLZ
22463	CENTRAL SYSTEM
22485	DELTA
22487	CENTRAL SYSTEM
22513	TEL
22529	CO <sup>C</sup>
22556	SYSGEN
22564	CENTRAL SYSTEM
22574	SUPER
22578	PCL
22580	PCL
22585	FSAVE
22596	CENTRAL SYSTEM
22601	HANDLERS
22632	SUPER
22634	FSAVE
22635	CENTRAL SYSTEM
22639	CENTRAL SYSTEM
22642	BATCH
22656	SYSGEN
22669	DELTA
22680	FRES
22682	CENTRAL SYSTEM
22694	DELTA
22701	CENTRAL SYSTEM
22703	CENTRAL SYSTEM
22726	CENTRAL SYSTEM
22743	ERRLOG

22744	ERRLOG
22754	CENTRAL SYSTEM
22765	CENTRAL SYSTEM
22766	PCL
22767	CENTRAL SYSTEM
22768	CENTRAL SYSTEM
22771	CENTRAL SYSTEM
22772	CENTRAL SYSTEM
22777	LOADER
22785	PCL
22786	CENTRAL SYSTEM
22798	CENTRAL SYSTEM
22799	CENTRAL SYSTEM
22809	CENTRAL SYSTEM
22825	CENTRAL SYSTEM
22827	DELTA
22839	CENTRAL SYSTEM
22844	FRR:LIST
22845	PCL
22852	CENTRAL SYSTEM
22867	CENTRAL SYSTEM
23077	TEL
23085	SUPER
23087	CCI
23090	CENTRAL SYSTEM
23094	CENTRAL SYSTEM
23097	FRRLOG
23099	CENTRAL SYSTEM
23102	EDIT
23124	CCI
23126	CENTRAL SYSTEM
23133	ERRLOG
23144	TEL
23148	CENTRAL SYSTEM
23152	SEGLD
23161	CENTRAL SYSTEM
23163	CENTRAL SYSTEM
23164	CENTRAL SYSTEM
23191	CENTRAL SYSTEM
23215	TEL
23216	CENTRAL SYSTEM
23225	CENTRAL SYSTEM
23234	CENTRAL SYSTEM
23236	FILL
23274	CENTRAL SYSTEM
23278	CENTRAL SYSTEM
23290	FSAVE
23304	CENTRAL SYSTEM
23305	CENTRAL SYSTEM
23316	CENTRAL SYSTEM
23335	CENTRAL SYSTEM
23352	CENTRAL SYSTEM
23353	ERRLOG
23363	CENTRAL SYSTEM

23375	CENTRAL SYSTEM
23376	ANLZ
23384	CENTRAL SYSTEM
23385	LDEV
23386	ERRLOG
23421	HANDLERS
23433	CENTRAL SYSTEM
23442	ERRLOG
23449	CENTRAL SYSTEM
23453	CCI
23462	CENTRAL SYSTEM
23476	IRBT
23736	CENTRAL SYSTEM
23737	CENTRAL SYSTEM
23739	CENTRAL SYSTEM
23740	ERRLOG
23766	CENTRAL SYSTEM
23781	CENTRAL SYSTEM
23782	CENTRAL SYSTEM
23834	CENTRAL SYSTEM

Improvement SIDRs Closed

06538	INITIAL
07942	INITIAL
07960	COC
09148	DELTA
09323	CENTRAL SYSTEM
09758	ERR:LIST
09880	PROCS
09891	LOADER
10005	CENTRAL SYSTEM
10230	DELTA
11167	RECOVERY
11233	COC
11280	FSAVE
11315	FRES
11468	COC
12143	ERRLOG
12371	HANDLERS
20103	ALLOCAT
20370	FRES
20924	HGPRECON
21049	CENTRAL SYSTEM
21279	FSAVE
21283	DELTA
21356	COC
21379	KEY IN
21388	KEY IN
21428	EDIT
21439	CENTRAL SYSTEM
21449	CENTRAL SYSTEM
21469	CENTRAL SYSTEM
21644	RATES
21646	CENTRAL SYSTEM
21673	CENTRAL SYSTEM
21771	IRBT
21882	RBBAT
21933	COC
21973	CENTRAL SYSTEM
22020	FRES
22028	HGPRECON
22097	FSAVE
22115	DRSP
22156	FRES
22165	GAC
22407	COC
22419	CENTRAL SYSTEM
22436	SYSGEN
22447	COC
22496	COC
22512	IRBT
22560	SYMBIONTS
22602	FRES
22604	FRES

22687	CENTRAL SYSTEM
22709	CINTPAL SYSTEM
22745	CENTRAL SYSTEM
23079	CENTRAL SYSTEM
23146	RBBAT
23272	DELTA

4.0

RELEASE CONTENTS

4.1

## C00 RELEASE TAPES (707000-26/46/66 C00)

Two FSAVE tapes contain all the input necessary to generate a CP-V C00 system. There are also control files on the tapes which will facilitate the SYSGEN process. These tapes contain the following accounts which will be described separately.

:C00CI	Compressed Source
:C00SI	Symbolic Updates
:C00BO	Binary from :C00CI and :C00SI assemblies
X	Non-supported Utilities
3531SYS	Standard Processors
COBLIB	COBOL Library
RPGLIB	RPG Library
CDBGLIB	COBOL DEBUG Library
SORTLIB	SORT Library

The C00 FSAVE tapes are INSN 00B0 and 00B1, Account :SYS.

4.1.1

:C00CI

Compressed files for CP-V C00. DATADEF is included in :C00CI for assembling module PART in the CONTROL processor. It is not a standard CP-V release element and no development support of DATADEF is implied.

4.1.2

:C00SI

Updates that have been applied to the compressed files in :C00CI. The two accounts, :C00CI and :C00SI, are included in the release as a convenience and are not normally needed to create a PO tape for CP-V C00. The ROMs in account :C00BO have been created by assembling the compressed files in :C00CI with the update files in :C00SI. These two accounts allow the installation to recreate any ROM in :C00BO.

4.1.3

:C00BO

Binary ROMs of all the files necessary to generate a CP-V system. Systems UTS, BPM, TP:TPO, LP:TPOQ, RTPROCS, DIAG, DATADEF, and SIG7FDP are contained in :C00BO. :C00BO also contains the following files to assist an installation in building a system:

- o SLOCCTS This job contains the source for all the CP-V LOCCTS which are needed in the PASS3 phase of SYSGEN. The element files are listed one per line and specify the account :C00BO. The PASS2 generated files and the files pulled in by SYSGEN are expected in the current account (usually :C00SGEN).
- o \$PASS2 This job is the PASS2 input of the SYSGEN used in El Segundo for experimental development. It should be modified to fit the particular installation's software requirements, hardware configuration, and system management controls. (References: CP-V SM Reference Manual, 90 16 74G, 1974; Section 5.0 of this document, 707000-11C00; attached CP-V SM Reference Manual updates, 707000-91C00).
- o \$GENJOB1 This job brings in the required files from the :C00BO and 3531SYS accounts, loads M:MON and the JIT, builds :J0, :J1, and MONSTK, then BATCHes off the \$GENJOB2 file.
- o \$GENJOB2 This job is started by \$GENJOB1 or by \$GENMINI1 and loads the initial set of ghosts and processors, then BATCHes off the \$GENJOB3 file.
- o \$GENJOB3 This job is started by \$GENJOB2, loads the remaining ghosts and processors, and builds symbols for ANALYZE.
- o \$DEFJOB This job writes two CP-V PO tapes.
- o \$CPYSTD This file is a PCL standard file which contains the names of all the files which must be in the :C00SGEN account. These files include device handlers, the system libraries, the DCBs, the various SYSTEMS (BPM, SIG7FDP, etc.) and the processors from the 3531SYS account (COBOL, FORTRAN, etc.). The \$GENxxx1 files mentioned here begin with a PCL 'COPYSTD' of this file into the :C00SGEN account.
- o \$P2MINI This file is an example of the PASS2 that was used to create one of the starter system PO tapes (see Section 4.2).

- \$GENMINI1 This file is the equivalent of \$GENJOB1 except that it is designed to run on systems that have only 64K memory.
- \$P2UNCOC This file is the equivalent of \$PASS2 except that all references to COC and ONLINE have been deleted. It is included as a convenience for users who want a NON-COC system.
- \$CLOCCTS This file is the equivalent of \$LOCCTS except that it is set up for use under CP-V B00.
- \$CGENJOB1 This file is the equivalent of \$GENJOB1 except that it is set up for use under CP-V B00.
- \$CGENJOB2 This file is the equivalent of the \$GENJOB2 and \$GENJOB3 files except that it is set up for use under CP-V B00.
- \$CDEF This file is the equivalent of \$DEFJOB except that it is set up for use under CP-V B00.
- \$NEWCOCJOB CP-V C00 contains three versions of COC in :C00BO. The one selected by SYSGEN depends on the PASS2 options specified.  
  
(MINICOC) selects MINICOC.  
  
(TP) selects TPCOC even if MINICOC is specified.  
  
Absence of both of the above selects COC.  
  
Since these versions are assembled based on different assembly switches, \$NEWCOCJOB is included in :C00BO to demonstrate how to assemble any or all of the three COC versions.
- M:MODNUM This file contains the device/controller model number data. The data was compiled from Field Engineering and Marketing information and should be complete; however, the file may be updated or modified using the SYSCON processor (see CP-V System Management Reference Manual, 90 16 74G).

## o DEVDMP

The DEVDMP file is a stand-alone program that will make a device copy of any PAD or pack on magnetic tape. It is loaded using the stand-alone loader, LOADDEVDM, from account X. It is described in the CP-V Operations Reference Manual, 90 16 75G. To obtain copies, use the following commands:

```
!PCL  
COPY LOADDEVDM.X TO CP(BIN)  
COPY DEVDM..:C00BO TO CP(BIN)  
END
```

4.1.4

3531SYS CRUPR02

Account 3531SYS contains the following standard processors. The \$CPYSTD file copies them from the 3531SYS account to the :C00SGEN account.

<u>FILE NAME</u>	<u>PROCESSOR</u>	<u>VERSION</u>
:BLIB	FORT	E00
:DIC	FORT	E00
:LIB	FORT	E00
:P0	FORT	F00
:P00	FORT	E00
:P1	FORT	E00
:P11	FORT	E00
APL	APL	B00
APLTRMSB	APL	B00
BASIC	BASIC	C01
COBOL	COBOL	E01
EASY	EASY	A00
ERRNOTES	RPG	A01
FLAG	FLAG	D00
FORT	Ext. FORTRAN IV	E00
FORTLIB	SYSTEM FORTLIB	A01
MERGE	MERGE	E00
METASYM	METASYMBOL	H01
RPG	RPG	B00
SORT	SORT	E00
TEXT	TEXT	A02
SIML	1400 SIMULATOR	E00

4.1.5

COBLIB

Account COBLIB contains the files which make up the COBOL library.

4.1.6

RPGLIB

Account RPGLIB contains the files which make up the RPG library.

4.1.7

SORTLIB

Account SORTLIB contains the files which make up the SORT library.

4.1.8

CDBGLIB

Account CDGGLIB contains the files which make up the COBOL DEBUG library.

4.1.9

X

Account X contains a set of utility programs which are not supported, but which are used by development programming and tend to be useful to CP-V installations. Many new programs have been added to Account X since CP-V B00. They include COC diagnostics and helpful Fortran library routines. The account has grown to over 2000 granules. The source for each program is included in compressed form so that improvements or modifications can be made by an installation. Some files in account X which are particularly useful are these:

- o     JOBMNSTK     This file should be BATCHed after a new system is generated in order to reload those programs in account X which load with MONSTK.
- o     JOB            This file can be BATCHed to compile and load all of the programs in account X.
- o     HELP           The file HELP describes each program in account X and contains information about the use of each program.
- o     BOOK           This program is described in BOOKHFLP and provides access to the CP-V TS Users Guide from an on-line terminal.

## 4.2

## STARTER SYSTEMS

Since several types of disk or RADs may be used as the system swapping device, two PO tapes are available of 'mini CP-V' systems as 707000-86C00. Volume 1 of 2 is a PO tape for a 7242 or 7271 swapper. Volume 2 of 2 is a PO tape for a 7275 swapper. The INSN of both tapes is 'CPCG' and the account is :C00SGLN. These PO tapes should be used only to perform the initial SYSGEN.

4.3

-11

This document (707000-11C00) contains a description of the new features of CP-V C00, a list of SIDRs closed, SYSGEN procedures, release contents, etc.

4.4

-91

This document (707000-91C00) contains last minute CP-V C00 manual updates and corrections. The manuals subject to these changes are listed in Section 1.4.

4.5

#### TEST TAPE

A QUAC Test Tape (707000-76C00) contains the CP-V C00 Test Case Library. Section 10 of this document describes the test procedures. The QUAC Test Tape is an FSAVE tape with an INSN=19A0 and ACCOUNT=:SYS.

4.6

#### COMPRESSED LISTING TAPE

Compressed listing tapes (707000-56C00) which contain listings of all supported modules in CP-V. The listing tapes contain additional commentary and documentation in addition to the :C00SI updates. These tapes may be uncompressed and listed using the UTILIST utility program in account X. The tape INSNs are 00A0, 00A1, 00A2 and there are 3 volumes in the set. The account is :SYS. Section 5.0, example 10 shows a standard UTILIST job.

4.7

#### VOLINIT

The D00 version of VOLINIT (706226-D00) is a stand-alone program which initializes disk packs (writes headers and does surface checking). A description is in the CP-V Operations Reference Manual. Note: only the D00 version of VOLINIT may be used to prepare packs for CP-V. VOLINIT is not released with CP-V but may be ordered by the above catalog number.

4.8

**-02 ELEMENT, UNPUBLISHED TECHNICAL DOCUMENTATION**

This element contains the CP-V C00 internal specifications which were written to describe the implementation of the CP-V C00 features. This element is not part of the standard release package, but can be obtained by special order for 707000-02C00.

The specifications in the -02 element are:

<u>TITLE</u>	<u>DRAWING SYSTEM NUMBER</u>
TP Queue Manager	703232
TP TIC	703231
TP Ghost	703279
Basic 560 Conversion	703260
Boot Time Reconfiguration and Partitioning	703240
Real Time - Phase II	703313
File Management Enhancements	
o OPEN/CLOSE Restructuring	703264
o Link Fixing Ghost (FIX)	703309
o Granule Cleaning	703286
o NS Tapes	703274
o Redundant File Directories	703272
o Shared Keyed Files	703275
Remote Assist Terminal Interface	703222

5.0 SYSGEN CONSIDERATIONS

## 5.1 INTRODUCTION

This section describes SYSGEN processor changes as well as procedures to follow when doing a C00 SYSGFN. Two "starter" PO tapes are available, one for a 7271 disk pack swapper (for use with 7242, 7271, or other 6 sector per track disk pack devices); the other for a 7275 disk pack swapper. These "starter" PO tapes are supplied as starter systems to generate CP-V C00 target systems.

## 5.2 PASS2 CHANGES

- o A new command has been added to the list of commands that may be submitted as input to PASS2. The new command is :HANDLERS2. It does not require any options. Its function is to inform PASS2 that a fixed group of handler names is to be placed in the new HANDLERS2 record of SPEC:HAND. These handlers are destined to be placed in UMOV, the unmapped monitor overlay. If :HANDLERS2 is not included as a PASS2 control command, all handlers are destined to be placed in the root of the monitor.
- o Another new record has been added to the SPEC:HAND file. This record has the key 'OVNAMES'. The contents of the record are names of monitor overlays that are to be removed from the M:MON LOCCT by PASS3. PASS2 decides which ones go into this record on the basis of information obtained from the :MON, :FRGD, and :HANDLERS2 control commands. The optional overlays may be one or more of the following:

UMOV  
TQOV1  
TQOV2  
RTOV  
ENQOV  
ECBOV

- o The :MON command may specify up to three target machines and memories in excess of 128K for either a SIGMA 9 or a XEROX 560. Appropriate fault handlers will be selected and other pertinent information will be generated according to the systems selected.

New options on the :MON card are: (SIG6), (SIG9), (X560), (BIG), (TP), (MINICOC). The MINICOC and TP options also determine the type of COC handler that will be selected.

- o The :FRGD and :INTLB commands have a new set of options superceding the ones previously required.
- o Two new standard device types are recognized. These are:
  - MO Message mode communication equipment for TP
  - MC The remote assist terminal (maintenance console specific to and required for the XEROX 560)
- o A new RAD, 3214, and a new pack, 3275, are recognized as standard disk devices.
- o New options on the device card are: (DD), (CC), (SWAPCD,N).
- o The number of COCs is limited to 8, and the output COC interrupt must be one greater than the input interrupt in an in/out pair.
- o The TP feature has been added to the list of features previously recognized by the :FAUTH command.
- o The !PASS2 command no longer requires that a monitor type be specified.
- o When PASS2 is finished, it will print out the number of errors, if any, that were encountered as well as appropriate warnings.
- o The :IMC command has one additional option for TP - PWP.
- o The :COC command has one additional option- ECB.
- o :SPROCS default list is smaller. The MOSPACE option has been deleted. Refer to the System Management section of the -91 (707000-91C00) for the :SPROCS default list.

Note all new options are described in detail in the System Management Reference Manual.

### 5.3

### PASS3 CHANGES

- o PASS3 will link to a loader, other than the one in :SYS, if the user pre-assigns the F:LOADER DCB to the desired loader LMN file with an !ASSIGN or a SET command.

- o For the M:MON load, PASS3 will check the SPEC:HAND file to determine which handlers go into the HANDLERS file, and which handlers, if any, go into the HANDLERS2 file. Also, it obtains the name of each optional overlay from the OVNAMES record in SPEC:HAND and removes it from the M:MON LOCCT along with the associated ROM names. Thus, the loader will not attempt to load these overlays.

#### 5.4 M:MON LOCCT CHANGES

Beginning with CP-V C00, the monitor is structured as an overlaid load module with the monitor root and all possible monitor overlays being specified in the M:MON LOCCT input. PASS3 will remove from the output LOCCT file overlay and ROM names not needed for a particular SYSGEN. (See example 9.)

#### 5.5 HOW TO SYSGEN CP-V C00

- Step 1 Boot starter PO tape, keying-in "IPFT" upon request. Note: XDELTA should be omitted while generating the target system. (See Example 1.)
- Step 2 LOGON under :SYS,LBE and use SUPER to modify the :SYS account for maximum privilege and core, plus tapes. Create the :C00SGEN account. The SYSGEN will be performed in this account. Account authorization should include tapes, core, RAD, and disk. (See example 2.)
- Step 3 Using FRES (see example 3), restore accounts :C00BO and 3531SYS from the release tapes to secondary storage; these accounts contain all of the files necessary to perform the target SYSGEN.
- STEP 4 Logon under the :C00SGEN account and copy the following files from the :C00BO account:

\$PASS2	(Example 4)
\$GENJOB1	(Example 5)
\$GENJOB2	(Example 6)
\$GENJOB3	(Example 6)
\$DEFJOB	(Example 7)
\$LOCCTS	(Example 9)

Maintain these files in the :C00SGEN account for inclusion on the target PO tape. When the target PO tape is booted, these files will then be available in the :SYS account for future reference and/or future modification.

**\*\*\*SPECIAL NOTE\*\*\***

Line 60. of \$GENJOB2 has an error -

!STEP EO,O

should be altered to

!STEP EQ,O

before proceeding, (OH to ZERO).

Step 5      BATCH the file \$LOCCTS. This job will create LOCCTS for the PASS3 loads. The job should terminate normally.

Step 6      EDIT the \$PASS2 file to fit the hardware configuration and the desired installation management parameters. The \$PASS2 file supplied with the release tape duplicates one of the PASS2s used for testing in El Segundo; the \$P2MINI file (included in the :C00BO account on the release tape) may be used as an example of a PASS2 used to generate a starter system.

Step 7      BATCH the EDITed \$PASS2 file and verify the results.

Step 8      BATCH the \$GENJOB1 file; this job will BATCH the \$GENJOB2 file which will, in turn, BATCH the \$GENJOB3 file, so make sure that they exist under those names in the :C00SGEN account.

Step 9      Check all output from \$GENJOB1, \$GENJOB2, and \$GENJOB3. These jobs should run with only the following messages:

- o      PASS3 of M:MON gives a severity level 4 message.
- o      PASS3 of FILLA gives a severity level 4 message.
- o      PASS3 of ANLZ has a PREF for #SWAP\$DEV.
- o      PASS3 of M:MON for a disk pack swapper has a PREF for XFFE00.

Note: The processor LOCCTS in the \$LOCCTS file are commented as:

'REQUIRED FOR TP'

'REQUIRED FOR REAL TIME'

## 'REQUIRED FOR OCP'

These LOCCTS may be deleted from the \$GENJOB?, \$GENJOB3, and the \$LOCCTS files if the specified options are not in the SYSGEN (otherwise, ignore their PREFs).

Two items to watch for are these:

- o The end of the monitor root (which is mapped one for one) must be less than .8000. In the example supplied, look for SUSPTERM<.8000.
- o If the released structure of the overlays has been altered, make sure that each is less than 3K in size (except for UMOV). PASS3 of M:MON reports the size of each overlay and this size must be 2.9K or less.

- Step 10 At this point, the :C00SGEN account will contain everything necessary to generate a CP-V C00 PO tape. If other processors are desired on the PO tape by the installation, they should be loaded in the :C00SGEN account prior to DEFing the tape. (Note: All pre-B00 loaded processors and user-programs must be re-loaded before they will execute under the C00 version of CP-V.)
- Step 11 It is possible (under the C00 version of CP-V) to include the patch deck on the PO tape such that it will be processed at boot-time by XDELTa. If this is desired, EDIT the file \$DEFJOB by inserting the following ASSIGN command at line number 3.5: !ASSIGN M:PATCH,(FILE,file[,account]). BATCH the file \$DEFJOB to create the PO tape. Section 8.1 describes the procedures for obtaining the current patch deck.
- Step 12 After booting the new CP-V PO tape, restore the library accounts from the release tapes. See Section 4 for the libraries supplied with the system.

## 5.6

## HOW TO DO A SYSGEN ON AND FOR A 64K MACHINE

- Steps 1-3 Identical to Section 5.5. (Note: XDELTa must be omitted on machines with small memories.)

- Step 4      Identical to section 5.5 except substitute the file \$GENMINI1 (example 8) for \$GFNJOB1. The differences between these two files have to do mainly with substituting special LOADERS for small core systems.
- Steps 5-7     Identical to Section 5.5.
- Steps 8-12    Identical to Section 5.5 except substitute \$GENMINI1 for references to the file \$GFNJOB1.

### 5.7 HOW TO DO A SYSGEN WITH NO COC

- Steps 1-3    The same as Section 5.5 with the following exceptions if booting a starter PO tape on a machine with no COC:
- o      Add a reconfiguration card to partition out the COC (i.e., :REMOVE A05).
  - o      Run SUPER as a batch job.
- Step 4      The same as Section 5.5 except substitute \$P2UNCOC for \$PASS2. EDIT the \$LOCCT file as follows:
- o      Delete these lines from the EF list -  
        !  
        (COCD,:C00BO),;  
        !  
        (M:COC),;
  - o      Add this line to the EF list -  
        !  
        (THEUNCOC,:C00BO),;
  - o      Delete these names from the Monitor TREE -  
        COCD-  
        M:COC-
  - o      Add this line to the Monitor TREE (in the data area, e.g., after the line which contained COCD) -  
        !  
        THEUNCOC-;

Note: THEUNCOC contains 5 ECB buffers. If more ECB buffers are required, THEUNCOC must be reassembled with 'NUMBUF EQU n' (where n is the number of buffers) replacing the NUMBUF definition in the SI for THEUNCOC.

Steps 5-12 The same as Section 5.5 except substitute \$P2UNCOC for references to \$PASS2.

The \$P2UNCOC file has been edited to delete all references to COC and ONLINE parameters.

Note: FDIT may be run as a GHOST from the OC when the system has no COC. Consult the CP-V TS Reference Manual (90 09 07F-1) for EDIT commands.

## 5.8 HOW TO DO A SYSGEN FOR CP-V C00 UNDER CP-V B00

Following are the steps required to do a SYSGEN for CP-V C00 while running under CP-V B00.

Step 1 Using B00 FRES, restore accounts :C00BO and 3531SYS from the release tapes to secondary storage. These accounts contain all of the files necessary to perform the target SYSGEN.

Step 2 Create the :C00SGEN account as defined in Example 2.

Step 3 Logon under the :C00SGEN account and copy the following files from the :C00BO account:

```
$PASS2  
$CLOCCTS  
$CGENJOB1  
$CGENJOB2  
$CDEF
```

All these files except \$CDEF may be deleted from :C00SGEN prior to DEFing the PO tape.

Step 4 BATCH the file \$CLOCCTS. This job will create LOCCTS for the PASS3 loads. This job should terminate normally; however, there is no printout of the monitor LOCCT.

Step 5 EDIT the \$PASS2 file to fit the hardware configuration and desired installation management parameters for the target system. Change the !PASS2 command to the following commands:

```
!RUN (LMN,C00PASS2,:C00BO)  
!DATA  
PASS2
```

Step 6 BATCH the EDITed \$PASS2 file and verify the results.

Step 6A Edit the !LIMIT record of file CGENJOB2, for the module which includes the PASS3 on RECOVER, from a : LIMIT of CORE,24 to CORE,32.

The above step is needed because the DEF processor cannot handle paged load modules other than the monitor.

Steps 7-11 The same as Steps 8-12 in Section 5.5 except substitute \$CGENJOB1 and \$CGENJOB2 for \$GENJOB1 and \$GENJOB2 respectively (\$CGENJOB2 incorporates both \$GENJOB2 and \$GENJOB3). Also, substitute \$CDEF for references to \$DEFJOB.

Note: Prior to running \$CDEF, delete \$CLOCCTS, \$CGENJOB1, \$CGENJOB2 and copy the C00 files \$LOCCTS, \$GENJOB1, \$GENJOB2, \$GENJOB3, and \$DEFJOB into :C00SCEN for inclusion on the PO tapes to facilitate later SYSGENs under C00.

Also, re-edit the altered SPASS2 file control cards (see Step 5) back to !PASS2 before DEFing the PO tape.

Example 1 - Booting the Starter PO tape for a  
7271 Disk Pack Swapper\* (Volume 1 of 707000-86C00)

1. Use the following patches to boot on 7242 pack swapper:

```
/DISCLIMS+1/.5DC0/    Size of 7242
RECOVER//  
*  
!
```

2. Add Boot Time Reconfiguration cards to the beginning of the patch deck if necessary, e.g.,

```
:SAVE
:TYPE 9T7322,B80      (to change tape address)
:TYPE ME7611,A10      (to change COC address)
:TYPE DP7271,C80      (Note: when changing the disk
                       pack address, the DP model remains
                       7271 even if pack is 7242.)
:REMOVE AC0            (to partition out device)
:END
```

3. Key in "IPFT" upon request (add "C" if you have patches or reconfiguration cards).

4. Key in DATE and TIME.

5. Change address of swapper, card reader, and printer if needed. Note: If addresses are changed here, be sure to add the proper reconfiguration cards as well.

```
C/LL/DC ASSIGN OK (YES/NO) NO
CRA03 = CRnnn
LPA02 = LPnnn
DPAE0 = DPnnn
```

6. System will now boot normally.

\* For 7275 Starter PO tape (Volume 2 of 707000-86C00) follow the same instructions except substitute 7275 for references to 7271.

## Starter System Devices

<u>Name</u>	<u>Address</u>	<u>Model</u>
TY	A01	7012
LP	A02	7445
CR	A03	7140
9T	A80	7322
DT	AC0	3345 (X560 NS Tape)
DP	AE0	7271
DP	AE0	7275
ME	A05	7611

Example 2 - SUPER Setup for SYSGEN

Log on to :SYS,LBE

```
!SUPER
-M :SYS,LBE
--B$PR = C0; O$PR = C0
--OMCO = 64; BMCO = 64
--BM9T = 1; OM9T = 1
--BMPDISC = 32000; OMPDISC = 32000
--BMTSTORE = 32000; OMTSTORE = 32000
--BMPSTORE = 32000; OMPSTORE = 32000
--  
-- CR
-C :C00SGEN,CPV
--B$PR = 80; O$PR = 80
--BMCO = 64; OMCO = 64
--BM9T = 1; OM9T = 1
--BMPDISC = 32000; OMPDISC = 32000
--BMTSTORE = 32000; OMTSTORE = 32000
--BMTIME = 999; OMTIME = 999
--BMLO = 9999; OMLO = 9999
--  
-- CR
-E
!OFF
```

Example 3 - FRES Setup for SYSGEN

```
!JOB      :SYS,LBE,7
!LIMIT (9T,1),(CORE,50)
!FRES
+VOL
00B0
+SELECT
:C00BO
3531SYS
+END
```

1•000 :CHAN  
 2•000 :DEVICE LIMIT, (TIME,5), (CPRE,32)  
 3•000 :ASSIGN M;E1,(FILE,"";#80NUM,:COOBEE),(IN)  
 4•000 :FASS2  
 6•000 :HANDLERS2  
 7•000 :CHAN  
 8•000 :DEVICE TYA01,(M8D,7012,7012)  
 9•000 :CHAN  
 10•000 :DEVICE LPA02,(M8D,7445,7445)  
 11•000 :CHAN  
 12•000 :DEVICE LPA0F,(M8D,7445,7445)  
 13•000 :CHAN  
 14•000 :DEVICE CRA03,(M8D,7140,7140)  
 15•000 :CHAN  
 16•000 :DEVICE CPA04,(M8D,7160,7160)  
 17•000 :CHAN  
 18•000 :DEVICE M8A0A,(M8D,FFFF,FFFF),(IB),(HAND,V2I8,V2CU),(CLIST,16)  
 19•000 :CHAN  
 20•000 :DEVICE M8A14,(M8D,FFFF,FFFF),(IB),(HAND,V2I8,V2CU),(CLIST,16)  
 21•000 :CHAN  
 22•000 :DEVICE RBA16,(M8D,FFFF,FFFF),(HALF),(IRBT),(RBS)  
 23•000 :CHAN  
 24•000 :DEVICE 9TA60,(M8D,7322,7321)  
 25•000 :DEVICE 9TA81,(M8D,7322,7321)  
 26•000 :DEVICE 9TA82,(M8D,7323,7321)  
 27•000 :DEVICE 9TA83,(M8D,7323,7321)  
 28•000 :DEVICE 9TA84,(M8D,7323,7321)  
 29•000 :DEVICE 9TA85,(M8D,7323,7321)  
 30•000 :CHAN  
 31•000 :DEVICE XPC00,(M8D,1200,1200),(PAPER,3A,84)  
 32•000 :CHAN  
 33•000 :DEVICE DCBF0,(M8D,D,7212,7211),(PSA,40)  
 34•000 :DEVICE DCBF1,(M8D,D,7212,7211),(PSA,40)  
 35•000 :CHAN  
 36•000 :DEVICE DCCF0,(M8D,D,7232,7231),(PER,200)  
 37•000 :DEVICE DCCF1,(M8D,D,7232,7231),(PFA,200)  
 38•000 :CHAN  
 39•000 :DEVICE DFD80,(M8D,D,7242,7240),(PFA,C8)  
 40•000 :DEVICE DFD81,(M8D,D,7242,7240),(PFA,C8)  
 41•000 :DEVICE DPD82,(M8D,D,7242,7240),(PRIV)  
 42•000 :DEVICE DPD83,(M8D,D,7242,7240),(PRIV)  
 43•000 :CHAN  
 44•000 :DEVICE DPAE0,(M8D,D,7271,7270),(PFA,190)  
 45•000 :DEVICE DPAE1,(M8D,D,7271,7270),(PFA,190)  
 46•000 :DEVICE DPAE2,(M8D,D,7271,7270),(PFA,190)  
 47•000 :DEVICE DPAE3,(M8D,D,7271,7270),(PFA,190)  
 48•000 :DEVICE DPAF4,(M8D,D,7271,7270),(PFA,190)  
 49•000 :DEVICE DPAE5,(M8D,D,7271,7270),(PFA,190)  
 50•000 :DEVICE DPAE6,(M8D,D,7271,7270),(PFA,190)  
 51•000 :DEVICE DPAE7,(M8D,D,7271,7270),(PFA,190)  
 52•000 :DEVICE DPAF0,(M8D,D,7271,7270),(PFA,190)  
 53•000 :DEVICE DPAF1,(M8D,D,7271,7270),(PFA,190)

50000 : CMAP  
 51000 : DEVICE MEA10, (M8D, 7611, 7611)  
 52000 : DEVICE MEA11, (M8D, 7611, 7611)  
 53000 : TDEVICE (IN, CKA03), (BUT, LPA0F), (BUT, LPA02), (BUT, CPA04),  
       (MXSTRM, 7), (BUT, XPCOD)  
 54000 : LDEV (C2, CR), (C3, CR), (L2, LP), (L3, LH), (L4, LP), (L5, LP),  
       (L6, LP), (L7, LP), (L8, LP), (L9, XP), (P2, CP), (P3, CP)  
 55000 : RES (RES, C9), (BSUM, 98), (BMAX, 64), (BDEF, 32),  
       (BSUM, 25), (BMAX, 25), (BDEF, 25),  
       (RES, 9T), (TOT, 6), (BSUM, 6), (BMAX, 6), (BDEF, 0),  
 56000 : (BSUM, 6), (BMAX, 6), (BDEF, 0), (GSUM, 4), (GMAX, 4), (GDEF, 2)  
 57000 : BN (SIG6), (INFIL, 120), (AUTFILE, 150), (CORE, 128),  
 58000 : (QUEUE, 30), (MPABL, 25), (CPABL, 8), (CFU, 70), (TP),  
 59000 : (BR3, 74), (MPATCH, 750), (SITE, 7TCOG), (ENG, 120),  
 60000 : (ANSDET)  
 61000 : FAUTH (EQ), (JE), (RP), (TP)  
 62000 : ELIMIT (TIME, 5, 999), (LB, 999, 9999), (PB, 999, 9999), (DB, 999, 9999),  
       (U8, 999, 9999), (TSTORE, 64, 1000), (PSTORE, 64, 1000),  
 63000 : (FPSEL, 8, 18), (TDISK, 200, 1000), (PUDISK, 100, 1000)  
 64000 : ELIMIT (TIME, 9999, 9999), (LB, 9999, 9999), (PB, 9999, 9999), (DB, 9999, 9999),  
 65000 : (U8, 9999, 9999), (TSTORE, 64, 1000), (PSTORE, 64, 1000),  
 66000 : (FPSEL, 6, 18), (TDISK, 200, 1000), (PUDISK, 100, 1000)  
 67000 : GLIMIT (TIME, 9999, 9999), (LB, 9999, 9999), (PB, 9999, 9999), (DB, 9999, 9999),  
       (U8, 9999, 9999), (TSTORE, 32767, 32767), (PSTORE, 32767, 32767),  
 68000 : (FPABL, 6, 6), (TDISK, 32767, 32767), (PDISK, 32767, 32767)  
 69000 : ELIMIT (TIME, 30), (LB, 20), (PB, 100), (DB, 20),  
 70000 : (U8, 20), (TSTORE, 64), (PSTORE, 20)  
 71000 : IMC (MAXG, 15), (MAXBL, 88), (MAXB, 8), (BLOCK, 240), (UNBLCK, 14),  
 72000 : (GLANTA, 300), (MINGUAN, 20), (PKP, 20),  
 73000 : (BPRI8, FE), (SPRIB, FE), (GPRI8, FE),  
 74000 : (C8CBUF, 20), (PI, 0),  
 75000 : (THRESHOLD, 500), (L8GT, 35), (INTI, 120), (BACKUPALL),  
 76000 : (RASIZE, 25), (RATB, 5000)  
 77000 : PART (UNLACK), (SWAP), (GUAN, 500), (ST, 0, 6),  
 78000 : (CE, C, 64), (TIME, 0, 999), (PART, 16)  
 79000 : SPRHCS (TEXT), (APL, 6), (EASY, T), (FLAG, 4), (AP, 6), (IDP, 6),  
 80000 : (EDIT), (PCL), (METASYM, 2), (FBRT, 3), (BATCH), (BASIC),  
 81000 : (PSPACE, 6), (PSpace, 2, 64), (:P2, P), (:P3, P)  
 82000 : CGC (DEVICE, A1C), (LINES, 64), (BUFFERS, 120), (RING, 32), (SS), (SA),  
 83000 : (ES), (EA), (ECB, 20),  
 84000 : (2741, 49-51, 56-60),  
 85000 : (RATES, 30, 3, 8-11, 13, 15-47, 52-55, 61-63),  
 86000 : (TYPE, 5, 3, 8-11, 13, 15-47, 52-55, 61-63),  
 87000 : (HARDWARE, 15),  
 88000 : (CGC), (DEVICE, A11), (IN, 62), (AUT, 63), (LINES, 24),  
 89000 : (BUFFERS, 65), (RING, 32),  
 90000 : (RATES, 120, 1),  
 91000 : (TYPE, 0, 1),  
 92000 : (HARDWARE, 1),  
 93000 : ERGD (RESDF, 10, 10000), (NINT, 9), (DYNRESDF, 10, 5)  
 94000 : INTLB (R4, 64, 84), (R5, 65, 85), (R6, 66, 86), (P1, 1001, 91), (P2, 1002, 92)

```
1.000 JOB
2.000 LIMIT (TIME,30),(LP,9999),(CORE,64),(BORDER)
3.000 PCL
4.000 DELETE M:M8N,:J1,M8NSTK,:JITO,:JO
5.000 COPYSTD $COPYSTD,:CO0B0 TB DC
6.000 COPY      :ELIB,:SYS,SSSRBM,:CO0B0 OVER :BLIB
7.000 END
8.000 PASS3
9.000 ;M:M8N
10.000 :JITO
11.000 ASSIGN M:EI,(FILE,M:M8N)
12.000 ASSIGN M:E8,(FILE,:J1)
13.000 DEFCBM
14.000 ASSIGN M:EI,(FILE,M:M8N)
15.000 ASSIGN M:E8,(FILE,M8NSTK)
16.000 DEFCBM
17.000 ASSIGN M:EI,(FILE,:JITO)
18.000 ASSIGN M:E8,(FILE,:JO)
19.000 DEFCBM
20.000 ASSIGN M:EI,(FILE,M:M8N),(INPUT)
21.000 SYMCBN
22.000 BUILD (LIB)
23.000 END
24.000 STEP EQ,0
25.000 BATCH $GENJOB2
```

000 JBB  
2•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
3•000 PASS3  
4•000 :ALLECAT  
5•000 :ANLZ  
6•000 JBB  
7•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
8•000 PASS3  
9•000 :CBNTRBL  
10•000 :DRSP  
11•000 :ERK:FIL  
12•000 JBB  
13•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
14•000 PASS3  
15•000 :GENMD  
16•000 :ELLA  
17•000 :FILL  
18•000 JBB  
19•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
20•000 PASS3  
21•000 :FILLA  
22•000 :FIX  
23•000 :FRES  
24•000 :FSAVE  
25•000 JBB  
26•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
27•000 PASS3  
28•000 :GHEST1  
29•000 JBB  
30•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
31•000 PASS3  
32•000 :SCPGHST  
33•000 JBB  
34•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
35•000 PASS3  
36•000 :RBAT  
37•000 JBB  
38•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
39•000 PASS3  
40•000 :RECOVER  
41•000 JBB  
42•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
43•000 PASS3  
44•000 :RUNNER  
45•000 JBB  
46•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
47•000 PASS3  
48•000 :RVGHEST  
49•000 :SHOW  
50•000 :STATS  
51•000 JBB  
52•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)

53.000 PASS3  
54.000 :SYS CAN  
55.000 6E  
56.000 LIMIT (TIME,10),(CERE,24),(L0,9999)  
57.000 PASS3  
58.000 :XDELTA  
59.000 END  
60.000 STEP EG,B  
61.000 BATCH \*GENJOB3

1•000 :DB  
2•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
3•000 PASS3  
4•000 PATCH  
5•000 VCCI  
6•000 :DEF  
7•000 :DELTA  
8•000 :DN  
9•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
10•000 PASS3  
11•000 VEDIT  
12•000 :EPS  
13•000 :ERRMAR  
14•000 :LDEV  
15•000 :LS  
16•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
17•000 PASS3  
18•000 :LINK  
19•000 :LADER  
20•000 :LS  
21•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
22•000 PASS3  
23•000 :LBBN  
24•000 :PCL  
25•000 :LS  
26•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
27•000 PASS3  
28•000 :RATES  
29•000 :SUPER  
30•000 :SYMCEN  
31•000 :LS  
32•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
33•000 PASS3  
34•000 :DEFCOM  
35•000 :GAC  
36•000 :GRSUP3C  
37•000 :S:EVRL  
38•000 :TEL  
39•000 :LS  
40•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
41•000 PASS3  
42•000 :LABEL  
43•000 :LBCT  
44•000 :PASS2  
45•000 :PASS3  
46•000 :LS  
47•000 LIMIT (TIME,10),(CBRE,24),(L8,9999)  
48•000 PASS3  
49•000 :PEIL  
50•000 :RES  
51•000 :WEZF  
52•000 :SUMMARY

3•000 J85  
4•000 LIMIT (TIME,10),(CORE,24),(L8,9999)  
5•000 PASS3  
6•000 :ITP3  
7•000 :DELUTL  
8•000 :LISTGIF  
9•000 J86  
10•000 LIMIT (TIME,10),(CORE,24),(L8,9999)  
11•000 PASS3  
12•000 :PREPLBAD  
13•000 :GPRP  
14•000 :GREMAKE  
15•000 :ISTRNUTL  
16•000 :TFDUTL  
17•000 J87  
18•000 LIMIT (TIME,10),(CORE,10),(U8,9999),(ORDER)  
19•000 ASSIGN M:EI,(FILE,ERRTEXT)  
20•000 RUN (LMN,ERRMAR)  
21•000 J88  
22•000 LIMIT (CORE,28),(TIME,5),(ORDER)  
23•000 \*THE SYMBOL CARD MUST REFLECT THE SYSGEN ACCOUNT ELSE THE SYMBOLS  
24•000 \*WILL BE GENERATED FROM THE M:MAN IN THE :SYS ACCOUNT.  
25•000 RUN (LMN,ANLZ)  
26•000 DATA  
27•000 ANALYZE  
28•000 WRITE  
29•000 SYMBOLS M:MAN,:COOSGEN  
30•000 END

```
1.000 JBB
2.000 LIMIT (TIME,6),(CBPE,32),(9T,1),(ORDER)
3.000 ASSIGN M;PE,(DEVICE,9T),(BUTSN,CPLG)
4.000 DEF CP,CO0
5.000 :INCLUDE (SYMBOLS,DIAG,DATADEF)
6.000 :INCLUDE (RTPR9CS)
7.000 :INCLUDE (GETMAIN,LP:TPBQ,TIC,TICDCBS,TP:TPB,TPC,TPCDMS,TPCSIM)
8.000 :WRITE
9.000 JBB
10.000 LIMIT (TIME,6),(CBPE,32),(9T,1),(ORDER)
11.000 ASSIGN M;PE,(DEVICE,9T),(BUTSN,CPLG)
12.000 DEF CP,CO0
13.000 :INCLUDE (SYMBOLS,DIAG,DATADEF)
14.000 :INCLUDE (RTPR9CS)
15.000 :INCLUDE (GETMAIN,LP:TPBQ,TIC,TICDCBS,TP:TPB,TPC,TPCDMS,TPCSIM)
16.000 :WRITE
```

```
1•000 JOB
2•000 LIMIT (TIME,30),(LB,9999),(CERE,64),(BRDER)
3•000 FCL
4•000 DELETE M:M8N,:J1,M8NSTK,JITO,:JO
5•000 CPYSTD $CPYSTD,:CC0B8 TB DC
6•000 CPY :BLIB,:SYS,SSSRBM,:CO0B8 OVER :BLIB
7•000 END
7•100 ASSIGN F:LOADERS,(FILE,ZDL8ADR,:CO0B9)
8•000 PASS3
9•000 :M:M8N
9•100 ASSIGN F:LOADERS,(FILE,L8ADER,:SYS)
9•200 PASS3
10•000 :JITO
11•000 ASSIGN M:EI,(FILE,M:M8N)
12•000 ASSIGN M:E8,(FILE,:J1)
13•000 DEFC6M
14•000 ASSIGN M:EI,(FILE,M:M8N)
15•000 ASSIGN M:E8,(FILE,M8NSTK)
16•000 DEFC6M
17•000 ASSIGN M:EI,(FILE,JITO)
18•000 ASSIGN M:E8,(FILE,:JO)
19•000 DEFC6M
24•000 STEP EG,C
25•000 PATCH $GENJ0H2
```

1.000	JOB	
2.000	LIMIT (TIME,2), (CBREF,10), (BRDER)	
3.000	ASSIGN M:PB, (DEVICE,N8)	
4.000	LBCLT (LMN,M:MBN),,	
5.000	(BIAS,O), (SL,F), (N8TCB), (MREF,15),,	
6.000	(PERM), (ABS), (N8SYSLIB), (MAP), (LDFF),,	
7.000	(EF,),	PASS2
8.000	(MBN,:BRG),,	
9.000	(T8PR8BT,:C00B8),,	
10.000	(SSDATA,:C00B8),,	
11.000	(M:IBMD),,	PASS2
12.000	(PMDAT,:C00B8),,	
13.000	(CBCD,:C00B8),,	
14.000	(TABLES,:C00B8),,	
15.000	(TCATCH,:C00B8),,	
16.000	(M:CBC),,	PASS2
17.000	(M:SPR8CS),,	PASS2
18.000	(M:FRGD),,	PASS2
19.000	(M:IMC),,	PASS2
20.000	(SG:PNT),,	PASS2
21.000	(SG:RNT),,	PASS2
22.000	(SG:RTY),,	PASS2
23.000	(SG:RCT),,	PASS2
24.000	(SG:OPNM),,	PASS2
25.000	(SG:BPX),,	PASS2
26.000	(SG:FLG),,	PASS2
27.000	(SG:LNT),,	PASS2
28.000	(SG:DLNTP),,	PASS2
29.000	(M:ELIMIT),,	
30.000	(REQDC,:C00B8),,	
31.000	(M:CPU),,	PASS2
32.000	(M:CBNFIG),,	PASS2
33.000	(IBTABLE),,	PASS2
34.000	(M:DCTM8D),,	PASS2
35.000	(M:SDEV),,	PASS2
36.000	(COMBAT,:C00B8),,	
37.000	(M:PART),,	PASS2
38.000	(HGPSTK,:C00B8),,	
39.000	(INITRCVR,:C00B8),,	
40.000	(GPHGP,:C00B8),,	
41.000	(ACCT,:C00B8),,	
42.000	(HANDLERS),,	PASS2
43.000	(ERHNDLR,:C00B8),,	
44.000	(CSEHAND,:C00B8),,	
45.000	(CSEBRANCH),,	
46.000	(FBCD,:C00B8),,	
47.000	(SCHED,:C00B8),,	
48.000	(SCHDSUB,:C00B8),,	
49.000	(RTPFSR,:C00B8),,	
50.000	(STEP,:C00B8),,	
51.000	(ECBELK,:C00B8),,	
52.000	(ECSP8ST,:C00B8),,	

3.000 (ECBINIT, :C00B8) //  
 54.000 (CD, :C00B8) //  
 55.000 (CALENDAR, :C00B8) //  
 56.000 (MF, :C00B8) //  
 57.000 (CALFREC, :C00B8) //  
 58.000 (ALTCP, :C00B8) //  
 59.000 (PM, :C00B8) //  
 60.000 (T:BV, :C00B8) //  
 61.000 (IBD, :C00B8) //  
 62.000 (ENTRY, :C00B8) //  
 63.000 (BLUFF, :C00B8) //  
 64.000 (GRAN, :C00B8) //  
 65.000 (GRSUB, :C00B8) //  
 66.000 (ADD, :C00B8) //  
 67.000 (CEBP, :C00B8) //  
 68.000 (SYMSURR, :C00B8) //  
 69.000 (IBRT, :C00B8) //  
 70.000 (IEd, :C00B8) //  
 71.000 (RDF, :C00B8) //  
 72.000 (WRTE, :C00B8) //  
 73.000 (WRTO, :C00B8) //  
 74.000 (SUSPTERM, :C00B8) //  
 75.000 (CLBCK4, :C00B8) //  
 76.000 (SACT, :C00B8) //  
 77.000 (PFSR, :C00B8) //  
 78.000 (INITIAL, :C00B8) //  
 79.000 (JIT, :C00B8) //  
 80.000 (BBSTSUBR, :C00B8) //  
 81.000 (RECONFIG, :C00B8) //  
 82.000 (GETFIELD, :C00B8) //  
 83.000 (M:MEDNUM, :C00B8) //  
 84.000 (UM8V, :C00B8) //  
 84.100 (HANDLERS2, :C00B8) //  
 85.000 (TCBV2, :C00B8) //  
 85.100 (TPQ2, :C00B8) //  
 85.200 (CNMPREC, :C00B8) //  
 86.000 (TCBV1, :C00B8) //  
 86.100 (TPQ1, :C00B8) //  
 87.000 (STEP8VR, :C00B8) //  
 87.100 (STPNR, :C00B8) //  
 87.200 (MMNP, :C00B8) //  
 88.000 (RTBV, :C00B8) //  
 88.100 (RTNP, :C00B8) //  
 89.000 (RMASV, :C00B8) //  
 89.100 (RDERLEG, :C00B8) //  
 90.000 (OPEN, :C00B8) //  
 90.100 (SPN, :C00B8) //  
 90.200 (SPNF, :C00B8) //  
 90.300 (GRAND, :C00B8) //  
 90.400 (CFUR, :C00B8) //  
 90.500 (SESE, :C00B8) //  
 93.000 (MLEV, :C00B8) //  
 93.100 (MLU, :C00B8) //

PASS2

200  
 93.300  
 93.400  
 93.500  
 94.000  
 94.100  
 94.200  
 94.300  
 94.400  
 94.500  
 94.600  
 94.700  
 94.800  
 94.900  
 98.000  
 98.100  
 98.200  
 98.300  
 99.000  
 99.100  
 100.000  
 100.100  
 100.200  
 100.300  
 100.400  
 100.500  
 103.000  
 103.100  
 103.200  
 103.300  
 103.400  
 103.500  
 103.600  
 103.700  
 106.000  
 106.100  
 106.200  
 107.000  
 107.100  
 108.000  
 108.100  
 108.200  
 108.300  
 108.400  
 110.000  
 110.100  
 110.200  
 111.000  
 112.000  
 113.000  
 114.000  
 115.000  
 116.000

(BPND, :COOB8),  
 (BPNLD, :COOB8),  
 (SUPCLS, :COOB8),  
 (PV, :COOB8),  
 (MISSV, :COOB8),  
 (UCAL, :COOB8),  
 (TRAPC, :COOB8),  
 (T:DSMNT, :COOB8),  
 (TI:JBENT, :COOB8),  
 (TFILE, :COOB8),  
 (TIM, :COOB8),  
 (PSS, :COOB8),  
 (SEGLD, :COOB8),  
 (AVR, :COOB8),  
 (LTAPE, :COOB8),  
 (LBLT, :COOB8),  
 (RDL, :COOB8),  
 (ARDL, :COOB8),  
 (LDLNK, :COOB8),  
 (LNKTRC, :COOB8),  
 (KEYIN, :COOB8),  
 (KEYN, :COOB8),  
 (GETUSER#, :COOB8),  
 (KEYSUE, :COOB8),  
 (DELPRI, :COOB8),  
 (DISPLAY, :COOB8),  
 (BPNTP, :COOB8),  
 (BPNTP, :COOB8),  
 (BPNL, :COOB8),  
 (BPLB, :COOB8),  
 (CLSTP, :COOB8),  
 (ANSL, :COOB8),  
 (GERM, :COOB8),  
 (TYPR, :COOB8),  
 (ENGBV, :COOB8),  
 (ENQB, :COOB8),  
 (ENQUE, :COOB8),  
 (ECBV, :COOB8),  
 (ECBCHECK, :COOB8),  
 (DEBUG, :COOB8),  
 (PMO, :COOB8),  
 (TELLUSR, :COOB8),  
 (SNAP, :COOB8),  
 (DUMP, :COOB8),  
 (CLOSE, :COOB8),  
 (CLS, :COOB8),  
 (DLT, :COOB8))  
 TREE MBN::BRG-TBPRBT-SSDAT-M:IAMUD-PMDAT-C8CD-TABLES-  
 TCATCH-M:CAC-M:SPR8CS-  
 M:FRGD-M:IMC-SG:PNT-SG:RNT-SG:RTY-SG:RCT-SG:BNM-  
 SG:BPX-SG:FLG-SG:LNT-SG:ULNT-M:ELIMIT-REQDC-M:CPU-  
 M:CONFIG-IBTABLE-M:DCTM8D-M:SDEV-COMBAT-  
 M:PART-HGPSTK-INITRCVR-

• 117.000 GPHGP=ACCT=HANDLERS=ERHNDLR=CSEHAND=CSEBRANCH=;  
 • 118.000 FBOD=SCHED=SCHDSUB=RTPFSR=STEP=;  
 • 119.000 ECBBLK=ECBP8ST=ECBINIT=CJ=CJENDA=;  
 • 120.000 MM=CALPRBC=ALTCP=PM-T:EV=IBQ=ENTRY=;  
 • 121.000 BUFF=GRAN=GRSUB=ADD=COEP=SYMSUBR=PART=10D=RDF=WRTF=;  
 • 122.000 WRTD=SUSPTERM=CLOCK4=SACT=;  
 • 123.000 PFSR=INITIAL=B66TSUBR=JIT=RECONFIG=GETFIELD=M;M8DNUM=;  
 • 124.000 (UM8V=HANDLERS2=);  
 • 125.000 TQ8V2=TPQ2=CNMPR9C=ECBCHECK=;  
 • 126.000 TQ8V1=TPQ1=;  
 • 127.000 STEP8VR=STPNR=MMNR=;  
 • 128.000 RTEVR=RTNR=;  
 • 129.000 RMA8V=RDERLOG=;  
 • 130.000 EPENTP=EPNTP=EPNL=EPLO=BBSE=CLSTP=ANSL=GERM=TYPR=;  
 • 131.000 OPEN=EPN=EPNF=GRAND=CFUR=BBSE=;  
 • 132.000 MUL8V=MUL=EPND=EPNLD=SUPLLS=PV=GERM=;  
 • 133.000 MISSV=UCAL=TRAPC=T:DSMNT=T:JBBENT=FILE-TIM-PBS-SFGLD=AVER=GERM,  
 • 134.000 LTape=LBLT=RDL=ARDL=;  
 • 135.000 LDLINK=LNKTRC=;  
 • 136.000 KEYIN=KEYN=GETUSER#=KEYSUB=DELPRI=DISPLAY=GERM=;  
 • 137.000 ENQ8V=ENQB=FNQUE=;  
 • 138.000 ECB8V=ECBCHECK=;  
 • 139.000 DEBUG=PMD=TELLUSR=SNAP=DUMP=;  
 • 140.000 CLOSE=CLS=DLT)

• 141.000 DATA :LCCLT M:MN  
 • 142.000 :LCCLT (LMN,ALLBCAT),(BIAS,A000),(SL,F),(N8TCB),;  
 • 143.000 (PERM),(ABS),(N8SYSLIB),;  
 • 144.000 (MAP),(EF),;  
 • 145.000 (ALLYHD,:C00B8),;  
 • 146.000 (ALLYTD,:C00B8),;  
 • 147.000 (M:HGP),;  
 • 148.000 (ALLYTL,:C00B8),;  
 • 149.000 (ALLYCAT,:C00B8),;  
 • 150.000 (GRANSUB,:C00B8),;  
 • 151.000 (M8NSTK))

LOADS WITH RESIDENT MNSTK  
 PASS2

• 152.000 DATA :LCCLT ALLBCAT  
 • 153.000 :LCCLT (LMN,ANLZ),(BIAS,A000),(SL,F),(TSS,80),(BREF,200),;  
 • 154.000 (PERM),(ABS),;  
 • 155.000 (EF),;  
 • 156.000 (ANALZ,:C00B8),;  
 • 157.000 (ANALZB1,:C00B8),;  
 • 158.000 (ANALZB2,:C00B8),;  
 • 159.000 (ANALZB3,:C00B8),;  
 • 160.000 (MANSTK))  
 LOADS WITH RESIDENT MNSTK

• 161.000 TREE ANALZ-M8NSTK-(ANALZB1,ANALZB2,ANALZB3)

• 162.000 DATA :LCCLT ANLZ  
 • 163.000 :LCCLT (LMN,CNTRPL),(BIAS,A000),(SL,F),;  
 • 164.000 (PERM),(ABS),(N8SYSLIB),(TSS,300),;  
 • 165.000 (EF),;  
 • 166.000 (CBNMAIN,:C00B8),;  
 • 167.000 (CBNSUF,:C00B8),;  
 • 168.000  
 • 169.000

LOADS WITH RESIDENT MNSTK

170.000  
 171.000  
 172.000  
 173.000 DATA  
 174.000 :LOCCT  
 175.000 LOCCT  
 176.000  
 177.000  
 178.000  
 179.000  
 180.000  
 181.000 DATA  
 182.000 :LOCCT  
 183.000 LOCCT  
 184.000  
 185.000  
 186.000  
 187.000  
 188.000  
 189.000  
 190.000 DATA  
 191.000 :LOCCT  
 192.000 LOCCT  
 193.000  
 194.000  
 195.000  
 196.000  
 197.000  
 198.000  
 199.000  
 200.000  
 201.000  
 202.000 DATA  
 203.000 :LOCCT  
 204.000 LOCCT  
 205.000  
 206.000  
 207.000  
 208.000  
 209.000  
 210.000  
 211.000  
 212.000  
 213.000  
 214.000 DATA  
 215.000 :LOCCT  
 216.000 LOCCT  
 217.000  
 218.000  
 219.000  
 220.000  
 221.000 DATA  
 222.000 :LOCCT

(PART,:C00B8),  
 (ERRMSGE,:C00B8),  
 (M8NSTK))

C8NTRBL  
 (LMN,DPSP),(BIAS,A000),(SL,F),(N8TCB),  
 (PERM),(ABS),(N8SYSLIB),,  
 (EF,), LOADS WITH RESIDENT M8NSTK  
 (DRSPRBM,:C00B8),  
 (SYSMAKO,:C00B8),  
 (M8NSTK))

DRSP  
 (LMN,ERR:FIL),(BIAS,A000),(SL,F),(N8TCB),  
 (PERM),(ABS),(N8SYSLIB),,  
 (EF,), LOADS WITH RESIDENT M8NSTK  
 (ERRFIL,:C00B8),  
 (JULIAN,:C00B8),  
 (M:DCTM9D),  
 (M8NSTK))

ERR:FIL  
 (LMN,FILL),(BIAS,A000),(SL,F),  
 (PERM),(ABS),(N8SYSLIB),,  
 (EF,), LOADS WITH RESIDENT M8NSTK  
 (FILLRBMs,:C00B8),  
 (BACKUP,:C00B8),  
 (PURGE,:C00B8),  
 (FILLDCB,:C00B8),  
 (JULIAN,:C00B8),  
 (MAILBX,:C00B8),  
 (M8NSTK))

FILL  
 (LMN,FILLA),(BIAS,A000),(SL,F),  
 (PERM),(ABS),(N8SYSLIB),,  
 (EF,), LOADS WITH RESIDENT M8NSTK  
 (FILLA,:C00B8),  
 (BACKUPA,:C00B8),  
 (PURGEA,:C00B8),  
 (FILLDCBA,:C00B8),  
 (JULIAN,:C00B8),  
 (MAILBX,:C00B8),  
 (M8NSTK))

FILLA  
 (LMN,FIX),(ABS),(N8SYSLIB),(TSS,24),(PERM),(SL,F),  
 (EF,), LOADS WITH RESIDENT M8NSTK  
 (FIX1,:C00B8),  
 (RCVTAB,:C00B8),  
 (M8NSTK))

FIX

223.000 L8CLT (LMN,FRES),(BIAS,A000),(SL,F),(NETCB),  
 224.000 (PERM),(ABS),(NBSYSLIB),  
 225.000 (EF,) LOADS WITH RESIDENT M8NSTK  
 226.000 (FRESBE,:C00B0),  
 227.000 (M8NSTK))  
 228.000 DATA FRES  
 229.000 ;L8CLT (LMN,FSAVE),(BIAS,A000),(SL,F),(NETCB),  
 230.000 L8CLT (PERM),(ABS),(NBSYSLIB),  
 231.000 (EF,) LOADS WITH RESIDENT M8NSTK  
 232.000 (FSAVERB,:C00B0),  
 233.000 (M8NSTK))  
 234.000  
 235.000 DATA FSAVE  
 236.000 ;L8CLT (LMN,GH8ST1),(BIAS,A000),(SL,F),(NETCB),  
 237.000 L8CLT (PERM),(ABS),(NBSYSLIB),  
 238.000 (MAP),(EF,) LOADS WITH RESIDENT M8NSTK  
 239.000 (GH8ST1D,:C00B0),  
 240.000 (RTBSBT,:C00B0),  
 241.000 (SYSMAK1,:C00B0),  
 242.000 (PODCBS,:C00B0),  
 243.000 (GENMDG,:C00B0),  
 244.000 (BITSTM,:C00B0),  
 245.000 (CCIO,:C00B0),  
 246.000 (RECBVER2,:C00B0),  
 247.000 (RCVRIS,:C00B0),  
 248.000 (ACCTSUM,:C00B0),  
 249.000 (M8NSTK),  
 250.000 (MAILBX,:C00B0),  
 251.000 (JULIAN,:C00B0),  
 252.000 (MIEIDCB,:C00B0),  
 253.000 (MIEEDCB,:C00B0))  
 254.000  
 255.000 DATA GH8ST1  
 256.000 ;L8CLT (LMN,LISTQIP),(BIAS,A000),(SL,F), REQUIRED FOR TP  
 257.000 L8CLT (PERM),(ABS),(NBSYSLIB),  
 258.000 (EF,) LOADS WITH RESIDENT M8NSTK  
 259.000 (LISTQIP,:C00B0),  
 260.000 (M8NSTK))  
 261.000  
 262.000 DATA LISTQIP  
 263.000 ;L8CLT (LMN,L8GBN),(BIAS,A000),(SL,F),(NETCB),  
 264.000 L8CLT (PERM),(ABS),(NBSYSLIB),(MAP),  
 265.000 (EF,) LOADS WITH RESIDENT M8NSTK  
 266.000 (L8GENRBM,:C00B0),  
 267.000 (ACCTSUM,:C00B0),  
 268.000 (MIEEDCB,:C00B0),  
 269.000 (SG:PNT), PASS2  
 270.000 (SG:RNT), PASS2  
 271.000 (SG:RTY), PASS2  
 272.000 (SG:SPNM), PASS2  
 273.000 (SG:LNT), PASS2  
 274.000 (SG:FLG), PASS2  
 275.000

276.000 DATA (M8NSTK))  
 277.000 :L8CLT L8GN  
 278.000 :L8CLT (LMN,BCPGHST),(BIAS,A000),(SL,F),; REQUIRED FOR BCP  
 279.000 L8CLT (PERM),(N8SYSLIB),;  
 280.000 (MAP),(EF),;  
 281.000 (BCPGST,:COOB8),;  
 282.000 (M8NSTK))  
 283.000  
 284.000 DATA  
 285.000 :L8CLT BCPGHST  
 286.000 L8CLT (LMN,PPS),(BIAS,A000),(SL,F),; REQUIRED FOR REAL-TIME  
 287.000 (PERM),(N8SYSLIB),(MAP),;  
 288.000 (EF),;  
 289.000 (PPS,:COOB8),;  
 290.000 (M8NSTK))  
 291.000 DATA  
 292.000 :L8CLT PPS  
 293.000 L8CLT (LMN,PREPLEAD),(BIAS,A000),(SL,F),; REQUIRED FOR TP  
 294.000 (PERM),(ABS),(N8SYSLIB),;  
 295.000 (EF),;  
 296.000 (PREPLEAD,:COOB8),;  
 297.000 (M8NSTK))  
 298.000 DATA  
 299.000 :L8CLT PREPLBAD  
 300.000 L8CLT (LMN,QPREP),(BIAS,A000),(SL,F),; REQUIRED FOR TP  
 301.000 (PERM),(ABS),(N8SYSLIB),;  
 302.000 (EF),;  
 303.000 (QPREP,:COOB8),;  
 304.000 (M8NSTK))  
 305.000 DATA  
 306.000 :L8CLT QPREP  
 307.000 L8CLT (LMN,QREMAKF),(BIAS,A000),(SL,F),; REQUIRED FOR TP  
 308.000 (PERM),(ABS),(N8SYSLIB),;  
 309.000 (EF),;  
 310.000 (QREMAKE,:COOB8),;  
 311.000 (M8NSTK))  
 312.000 DATA  
 313.000 :L8CLT QREMAKE  
 314.000 L8CLT (LMN,RBBAT),(BIAS,A000),(SL,F),(NATCB),;  
 315.000 (PERM),(ABS),(N8SYSLIB),;  
 316.000 (MAP),(EF),;  
 317.000 (RBBATM,:COOB8),;  
 318.000 (MBS,:COOB8),;  
 319.000 (GETUSER#,:COOB8),;  
 320.000 (RBBATR,:COOB8),;  
 321.000 (M:SYMB),;  
 322.000 (M8NSTK))  
 323.000 DATA  
 324.000 :L8CLT RBBAT  
 325.000 L8CLT (LMN,RECOVER),(BIAS,4000),(SL,F),(NATCB),;  
 326.000 (PERM),(ABS),(N8SYSLIB),;  
 327.000 (MAP),(EF),;  
 328.000 (RCVCTL,:COOB8),;

329.000 (CYCUSR,:C00B0),  
 330.000 (RCVTA8,:C00B0),  
 331.000 (TSTHGP,:C00B0),  
 332.000 (SYMFILS,:C00B0),  
 333.000 (RCVRIB,:C00B0),  
 334.000 (GRSUB,:C00B0),  
 335.000 (MNSTK),  
 336.000 (RCVDEF,:C00B0), (I8TABLE)) • MUST BE ADJACENT.  
 337.000 DATA  
 338.000 :L8CCT  
 339.000 L8CCT  
 340.000  
 341.000  
 342.000  
 343.000  
 344.000 DATA  
 345.000 :L8CCT  
 346.000 L8CCT  
 347.000  
 348.000  
 349.000  
 350.000  
 351.000 DATA  
 352.000 :L8CCT  
 353.000 L8CCT  
 354.000  
 355.000  
 356.000  
 357.000  
 358.000 DATA  
 359.000 :L8CCT  
 360.000 L8CCT  
 361.000  
 362.000  
 363.000  
 364.000  
 365.000  
 366.000 DATA  
 367.000 :L8CCT  
 368.000 L8CCT  
 369.000  
 370.000  
 371.000  
 372.000  
 373.000  
 374.000 DATA  
 375.000 :L8CCT  
 376.000 L8CCT  
 377.000  
 378.000  
 379.000  
 380.000  
 381.000

RECOVER  
 (LMN, RVGHOST), (BIAS,A000), (SL,F), (N8TCB),  
 (PERM), (ABS), (N8SYSLIB),  
 (MAP), (EF), LOADS WITH RESIDENT MNSTK  
 (RVGR8M,:C00B0),  
 (MNSTK))

RVGHST  
 (LMN, SHW), (BIAS,A000), (SL,F), (N8TCB),  
 (PERM), (N8SYSLIB),  
 (EF), LOADS WITH RESIDENT MNSTK  
 (SHWR8M,:C00B0),  
 (MNSTK))

SHW  
 (LMN, STATS), (BIAS,A000), (SL,F),  
 (PERM), (ABS), (N8SYSLIB),  
 (EF), LOADS WITH RESIDENT MNSTK  
 (STATSR8M,:C00B0),  
 (MNSTK))

STATS  
 (LMN, SYSCN), (BIAS,A000), (SL,F), (N8TCB),  
 (PERM), (ABS), (N8SYSLIB),  
 (MAP), (EF), LOADS WITH RESIDENT MNSTK  
 (SYSCN,:C00B0),  
 (GETFIELD,:C00B0),  
 (MNSTK))

SYSCN  
 (LMN, TPG), (BIAS,A000), (SL,F), REQUIRED FOR TP  
 (PERM), (ABS), (M100),  
 (MAP), (EF), LOADS WITH RESIDENT MNSTK  
 (TPG,:C00B6),  
 (TPG1RBM,:C00B6),  
 (MNSTK))

TPG  
 (LMN, XDELTAY), (BIAS,E000), (SL,F), (N8TCB),  
 (PERM), (ABS), (N8SYSLIB),  
 (MAP), (EF), LOADS WITH RESIDENT MNSTK  
 (XDLT,:C00B0),  
 (SYMTAB,:C00B0),  
 (MNSTK))

382.000 DATA  
 383.000 :LOCCT  
 384.000 LOCCT XDELTA  
 (LMN,BATCH), (BIAS,A000), (SL,F), (NATCB),;  
 (PERM), (ABS), (NBSYSLIB),;  
 (EF,),;  
 (BATCH1,:C00B8),;  
 (BATCH2,:C00B8),;  
 (ERRMSGE,:C00B8),;  
 (:JO))

LOADS WITH :JO

385.000  
 386.000  
 387.000  
 388.000  
 389.000  
 390.000  
 391.000 DATA  
 392.000 :LOCCT  
 393.000 LOCCT BATCH  
 (LMN,CCI), (BIAS,A000), (SL,F), (NBTCB),;  
 (PERM), (ABS), (NBSYSLIB),;  
 (EF,),;  
 (CCIR,:C00B8),;  
 (TELSCBPE,:C00B8),;  
 (DEBUGR,:C00B8),;  
 (TREER,:C00B8),;  
 (LIST,:C00B8),;  
 (LADDR,:C00B8),;  
 (RUNR,:C00B8),;  
 (ASSGR,:C00B8),;  
 (LIMR,:C00B8),;  
 (LEGRT,:C00B8),;  
 (JBBR,:C00B8),;  
 (BNPNSTARF,:C00B8),;  
 (READBI,:C00B8),;  
 (CHARROUT,:C00B8),;  
 (SUBR,:C00B8),;  
 (CCITABLS,:C00B8),;  
 (M;EBDCB,:C00B8),;  
 (SG:RNT),; PASS2  
 (SG:LNT),; PASS2  
 (SG:PNT),; PASS2  
 (:JO))

413.000  
 414.000  
 415.000  
 416.000  
 417.000 DATA  
 418.000 :LOCCT  
 419.000 LOCCT CCI  
 (LMN,DEF), (BIAS,A000), (SL,F),;  
 (PERM), (ABS), (NBSYSLIB), (TSS,100),;  
 (EF,),;  
 (DEFROM,:C00B8),;  
 (DFDCBS,:C00B8),;  
 (UTMBPPBT,:C00B8))

420.000  
 421.000  
 422.000  
 423.000  
 424.000  
 425.000 DATA  
 426.000 :LOCCT  
 427.000 LOCCT DEF  
 (LMN,DEFCBM), (BIAS,A000), (SL,F), (NBTCB),;  
 (PERM), (ABS), (NBSYSLIB),;  
 (EF,),;  
 (DFCM,:C00B8))

428.000  
 429.000  
 430.000  
 431.000 DATA  
 432.000 :LOCCT  
 433.000 LOCCT DEFCBM  
 (LMN,DELTA), (BIAS,1C000), (SL,F), (NBTCB),;  
 (PERM), (ABS), (NBSYSLIB),;

434.000

435.000 DATA (EF,) LOADS WITH :JO  
 436.000 (DLTA,;C00B8),;  
 437.000 (:JO)  
 438.000 DATA  
 439.000 :L8CCT DELTA REQUIRED FOR TP  
 440.000 L8CLT (LMN,DELUTL),(BIAS,A000),(SL,F),;  
 441.000 (PERM),(ABS),(NBSYSLIB),;  
 442.000 (EF,)  
 443.000 (DELUTL,;C00B8))  
 444.000 DATA  
 445.000 :L8CCT DELUTL LEADS WITH :JO  
 446.000 L8CLT (LMN,EDIT),(BIAS,A000),(SL,F),;  
 447.000 (PERM),(ABS),(NBSYSLIB),;  
 448.000 (EF,)  
 449.000 (EDITRBM,;C00B8),;  
 450.000 (M:EIDCB,;C00B8),;  
 451.000 (M:EBDCB,;C00B8),;  
 452.000 (:JO)  
 453.000 DATA  
 454.000 :L8CCT EDIT LOADS WITH :JO  
 455.000 L8CLT (LMN,ELLA),(PERM),(SL,F),(MAP),;  
 456.000 (EF,)  
 457.000 (ELLAR8BT,;C00B8),;  
 458.000 (ELLACSL,;C00B8),;  
 459.000 (ELLATMD,;C00B8),;  
 460.000 (ELLASUM,;C00B8),;  
 461.000 (ELLADSP,;C00B8),;  
 462.000 (:JO)  
 463.000 TREE ELLAR8BT-:JO-(ELLACSL,ELLATMD,ELLASUM,ELLADSP)  
 464.000 DATA  
 465.000 :L8CCT ELLA  
 466.000 L8CLT (LMN,ERRMWR),(BIAS,A000),(SL,F),(NBTCB),;  
 467.000 (PERM),(ABS),(NBSYSLIB),;  
 468.000 (EF,) LOADS WITH :JO  
 469.000 (ERRMWRBM,;C00B8),;  
 470.000 (:JO)  
 471.000 DATA  
 472.000 :L8CCT ERRMWR  
 473.000 L8CLT (LMN,GAC),(BIAS,A000),(SL,F),(NBTCB),;  
 474.000 (PERM),(ABS),(NBSYSLIB),;  
 475.000 (MAP),(EF,) LOADS WITH :JO  
 476.000 (GACRBM,;C00B8),;  
 477.000 (:JO)  
 478.000 DATA  
 479.000 :L8CCT GAC  
 480.000 L8CLT (LMN,GENMD),(PERM),(ABS),(NBTCB),(NBSYSLIB),;  
 481.000 (EF,(GENMD8,;C00B8)),(SL,F)  
 482.000 DATA  
 483.000 :L8CCT GENMD  
 484.000 L8CLT (LMN,GRUOP30),(PERM,LIB),(SL,F),;  
 485.000 (EF,)  
 486.000 (SSSRBM,;C00B8))  
 487.000 DATA

488.000 :LOCCT GROUP30  
 489.000 LOCCT (LMN,JITO),(BIAS,8C00),(SL,F),(NBTCB),  
 (PERM),(ABS),(NBSYSLIB),  
 (MAP),(EF),  
 (M:CONFIG),  
 (JIT,:COOB8))  
 490.000  
 491.000  
 492.000  
 493.000  
 494.000 DATA  
 495.000 :LOCCT JITO  
 496.000 LOCCT (LMN,LABEL),(SL,F),(NBTCB),(BIAS,A000),(PERM),  
 (EF),  
 (LABELR8M,:COOB8))  
 497.000  
 498.000  
 499.000 DATA  
 500.000 :LOCCT LABEL  
 501.000 LOCCT (LMN,LDEV),(BIAS,A000),(SL,F),(NBTCB),  
 (PERM),(ABS),(NBSYSLIB),  
 (MAP),(EF),  
 (LDEVR8M,:COOB8),  
 (:JO))  
 502.000  
 503.000  
 504.000  
 505.000  
 506.000 DATA  
 507.000 :LOCCT LDEV  
 508.000 LOCCT (LMN,LINK),(BIAS,1C000),(SL,F),(NATCB),  
 (PERM),(ABS),(NBSYSLIB),  
 (EF),  
 (LNK,:COOB8),  
 (:JO),  
 (VDCB,:COOE8))  
 509.000  
 510.000  
 511.000  
 512.000  
 513.000  
 514.000 DATA  
 515.000 :LOCCT LINK  
 516.000 LOCCT (LMN,LADER),(BIAS,A000),(SL,F),(NBTCB),  
 (PERM),(ABS),(NBSYSLIB),(MAP),  
 (EF),  
 (LDR,:COOB8),  
 (IN1,:COOB8),  
 (PS1,:COOB8),  
 (IN2,:COOB8),  
 (PS2,:COOB8),  
 (ALL,:COOB8),  
 (SQZ,:COOB8),  
 (EVL,:COOB8),  
 (WRT,:COOB8),  
 (MBD,:COOB8),  
 (:JO),  
 (FIN,:COOB8))  
 517.000  
 518.000  
 519.000  
 520.000  
 521.000  
 522.000  
 523.000  
 524.000  
 525.000  
 526.000  
 527.000  
 528.000  
 529.000  
 530.000  
 531.000 TREE LDR=PSP=:JO=(IN1,PS1,IN2,ALL,SQZ,EVL,WRT,FIN-MBD)  
 532.000 DATA  
 533.000 :LOCCT LOADER  
 534.000 LOCCT (LMN,LACCT),(BIAS,A000),(SL,F),  
 (PERM),(ABS),(NBSYSLIB),(TSS,100),  
 (EF),  
 (LOCCTR8M,:COOB8),  
 (M:EBCDCB,:COOB8))  
 535.000  
 536.000  
 537.000  
 538.000  
 539.000 DATA  
 540.000 :LOCCT

-541.000 L8CCT (LMN,PASS2),(BIAS,A000),(SL,F),  
 542.000 (PERM),(ABS),(BREF,20),(TSS,500),  
 543.000 (EF),  
 544.000 (P2CCI,:C00B8),  
 545.000 (P2DCBS,:C00B8),  
 546.000 (MODIFY,:C00B8),  
 547.000 (URCHAN,:C00B8),  
 548.000 (SDEVICE,:C00B8),  
 549.000 (XM8NIT8R,:C00B8),  
 550.000 (XLIMIT,:C00B8),  
 551.000 (P2SCPU,:C00B8),  
 552.000 (P2C&C,:C00B8),  
 553.000 (IMC,:C00B8),  
 554.000 (SPRBCS,:C00B8),  
 555.000 (XPART,:C00B8),  
 556.000 (P2LDV,:C00B8),  
 557.000 (P2BPL,:C00B8),  
 558.000 (FAUTH,:C00B8),  
 559.000 (FRGD,:C00B8),  
 560.000 (P2RES,:C00B8)  
 561.000 TREE P2CCI=P2DCBS-MODIFY-(URCHAN,SDEVICE,P2RES,P2LDV,FAUTH,FRGD,  
 562.000 P2BPL,XPART,XM8NIT8R,XLIMIT,P2SCPU,P2C&C,IMC,SPRBCS)  
 563.000 DATA  
 564.000 :L8CCT  
 565.000 L8CCT  
 6.000  
 567.000  
 568.000  
 569.000  
 570.000 DATA  
 571.000 :L8CCT  
 572.000 L8CCT  
 573.000  
 574.000  
 575.000  
 576.000  
 577.000  
 578.000  
 579.000  
 580.000  
 581.000  
 582.000  
 583.000  
 584.000  
 585.000  
 586.000  
 587.000  
 588.000  
 589.000  
 590.000  
 591.000  
 592.000  
 593.000

PASS2  
 (LMN,PASS3),(BIAS,A000),(SL,F),(N8TCB),  
 (PERM),(ABS),(N8SYSLIB),(TSS,200),  
 (EF),  
 (PASS3R8M,:C00B8),  
 (M:EIDCB,:C00B8))  
 PASS3  
 (LMN,PCL),(BIAS,A000),(SL,F),(N8TCB),  
 (PERM),(ABE),(N8SYSLIB),  
 (EF),  
 (PCLR8M,:C00B8),  
 (BLDCB,:C00B8),  
 (CBMBINE,:C00B8),  
 (COPYALL,:C00B8),  
 (COPYTB,:C00B8),  
 (COPYTRAN,:C00B8),  
 (DEVTRAN,:C00B8),  
 (ERR8R,:C00B8),  
 (FILTRAN,:C00B8),  
 (FIXARG,:C00B8),  
 (GETARG,:C00B8),  
 (HEXDUMP,:C00B8),  
 (INTARG,:C00B8),  
 (PCLLIST,:C00B8),  
 (PRTERR,:C00B8),  
 (RDWRT,:C00B8),  
 (STBRVL8,:C00B8),  
 (TEXTARG,:C00B8),  
 (UTILITY,:C00B8))

LOADS WITH :J0

594.000 DATA :LBCLT (SG:RNT) // PASS2  
 595.000 :LBCLT (SG:RTY) // PASS2  
 596.000 :LBCLT (SG:BNPM) // PASS2  
 597.000 :LBCLT (SG:FLG) // PASS2  
 598.000 (:JO)  
 599.000 DATA :LBCLT PCL  
 600.000 :LBCLT (LMN,PFIL),(BIAS,A000),(SL,F),(TSS,100),  
 601.000 :LBCLT (PERM),(ABS),(NBSYSLIB),  
 602.000 :LBCLT (EF),  
 603.000 :LBCLT (TAPEFCN,:C00B0),  
 604.000 :LBCLT (TPECHST,:C00B0)  
 605.000 DATA :LBCLT PFIL  
 606.000 :LBCLT (LMN,RATES),(BIAS,A000),(SL,F),(NATCB),  
 607.000 :LBCLT (PERM),(ABS),(NBSYSLIB),  
 608.000 :LBCLT (EF),  
 609.000 :LBCLT (RATERBM,:C00B0),  
 610.000 :LBCLT (:JO) LOADS WITH :JO  
 611.000 :LBCLT  
 612.000 :LBCLT  
 613.000 DATA :LBCLT RATES  
 614.000 :LBCLT (LMN,REW),(BIAS,A000),(SL,F),(TSS,100),  
 615.000 :LBCLT (PERM),(ABS),(NBSYSLIB),  
 616.000 :LBCLT (EF),  
 617.000 :LBCLT (TAPEFCN,:C00B0),  
 618.000 :LBCLT (TPECHST,:C00B0)  
 619.000 DATA :LBCLT REW  
 620.000 :LBCLT (LMN,RUNNER),(BIAS,1C000),(SL,F),NATCB),  
 621.000 :LBCLT (PERM),(ABS),(NBSYSLIB),  
 622.000 :LBCLT (MAP),(EF),  
 623.000 :LBCLT (RUNRBM,:C00B0),  
 624.000 :LBCLT (:JO) LOADS WITH :JO  
 625.000 :LBCLT  
 626.000 :LBCLT  
 627.000 DATA :LBCLT RUNNER  
 628.000 :LBCLT (LMN,S,BVRL),(PERM,LIB),(SL,F),  
 629.000 :LBCLT (EF),  
 630.000 :LBCLT (S:BVRLYR,:C00B0),  
 631.000 :LBCLT (:JO) LOADS WITH :JO  
 632.000 :LBCLT  
 633.000 DATA :LBCLT S:BVRL  
 634.000 :LBCLT (LMN,STNUTL),(BIAS,A000),(SL,F),  
 635.000 :LBCLT (PERM),(ABS),(NBSYSLIB),  
 636.000 :LBCLT (EF),  
 637.000 :LBCLT (STNUTL,:C00B0) REQUIRED FOR TP  
 638.000 :LBCLT  
 639.000 DATA :LBCLT STNUTL  
 640.000 :LBCLT (LMN,SUMMARY),(BIAS,A000),(SL,F),  
 641.000 :LBCLT (PERM),(ABS),  
 642.000 :LBCLT (EF),  
 643.000 :LBCLT (SUM,:C00B0),  
 644.000 :LBCLT (SUMDCB,:C00B0)  
 645.000 :LBCLT  
 646.000 DATA

647.000 :L8CCT SUMMARY  
 648.000 L8CCT (LMN,SUPER),(BIAS,A000),(SL,F),(N8TCB),  
 649.000 (PERM),(ABS),(N8SYSLIB),  
 650.000 (EF,) LOADS WITH :JO  
 651.000 (SUPER1,:C00B0),  
 652.000 (SUPER2,:C00B0),  
 653.000 (SUPER3,:C00B0),  
 654.000 (SG:PNT), PASS2  
 655.000 (SG:RNT), PASS2  
 656.000 (SG:BNM), PASS2  
 657.000 (SG:LNT), PASS2  
 658.000 (:JC))  
 659.000 DATA  
 660.000 :L8CCT SUPER  
 661.000 L8CCT (LMN,SYMCN),(BIAS,A000),(SL,F),(N8TCB),  
 662.000 (PERM),(ABS),(N8SYSLIB),  
 663.000 (EF,) LOADS WITH :JO  
 664.000 (SMCN,:C00B0),  
 665.000 (:JO))  
 666.000 DATA  
 667.000 :L8CCT SYMCN  
 668.000 L8CCT (LMN,TEL),(BIAS,1C600),(SL,F),(N8TCB),  
 669.000 (PERM),(ABS),(N8SYSLIB),(CSECT1),  
 670.000 (EF,) LOADS WITH :JO  
 671.000 (TELROM,:C00B0),  
 672.000 (ERRMSGE,:C00B0),  
 673.000 (SG:RTY), PASS2  
 674.000 (SG:RNT), PASS2  
 675.000 (SG:BNM), PASS2  
 676.000 (SG:FLG), PASS2  
 677.000 (:JO))  
 678.000 DATA  
 679.000 :L8CCT TEL  
 680.000 L8CCT (LMN,TFDUTL),(BIAS,A000),(SL,F), REQUIRED FOR TP  
 681.000 (PERM),(ABS),(N8SYSLIB),  
 682.000 (EF,  
 683.000 (TFDUTL,:C00B0))  
 684.000 DATA  
 685.000 :L8CCT TFDUTL  
 686.000 L8CCT (LMN,WE8F),(BIAS,A000),(SL,F),(TSS,100),  
 687.000 (PERM),(ABS),(N8SYSLIB),  
 688.000 (EF,  
 689.000 (TAPEFCN,:C00B0),  
 690.000 (TPECHST,:C00B0))  
 691.000 DATA  
 692.000 :L8CCT WE8F

Example 10 - Usage of UTILIST

The 3 compressed listing tapes (707000-56C00) may be listed using the UTILIST processor in account X.

To list all the files on the CP-V C00 listing tapes, copy UTILIST to :SYS and BATCH the following job:

```
!JOB  
!LIMIT (TIME,9999),(UO,32000),(9T=1)  
!ASSIGN M:EI,(LABEL,$,:SYS),(INSN,00A0,00A1,00A2)  
!UTILIST FB
```

To list a single module, BATCH the following job:

```
!JOB  
!LIMIT (TIME,5),(UO,999),(9T=1)  
!ASSIGN M:EI,(LABEL,$,:SYS),(INSN,00A2)  
!UTILIST FB  
SCHED
```

To list a range of modules, BATCH the following job:

```
!JOB  
!LIMIT (TIME,999),(UO,32000),(9T=1)  
!ASSIGN M:EI,(LABEL,$,:SYS),(INSN,00A0)  
!UTILIST FB  
ACCT -CALPROC
```

Note: Module name requires 8 characters, so leave appropriate number of spaces if necessary.)

#### LISTING TAPE CONTENTS


00A0	ACCT to GETFIELD
00A1	GETMAIN to QREMAKE
00A2	RA to 7446IO

6.0 INCOMPATIBILITIES


## 6.1 SPECIAL SHARED PROCESSORS

CP-V C00 special shared processors have been loaded as follows:


TEL

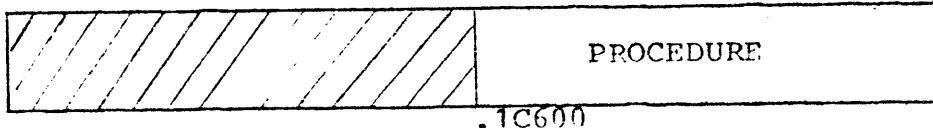


LINK

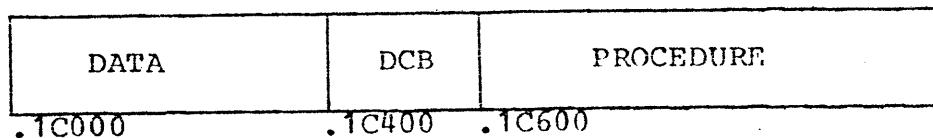


DELTA

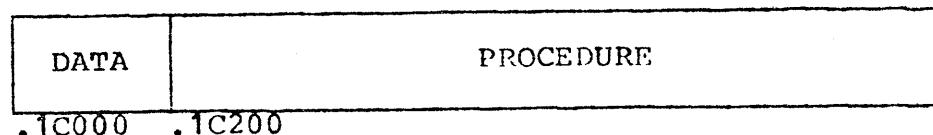

RUNNER

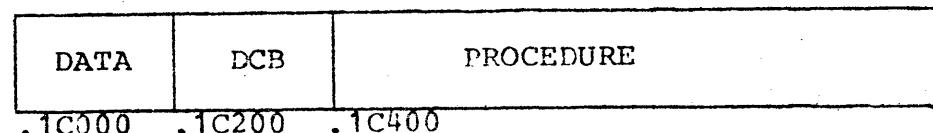

CORE LIBRARIES

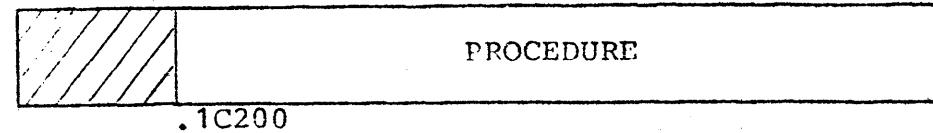


Since LINK and TEL are "co-existing" processors (i.e., users may begin LINK, suspend it and use TEL, and then return to LINK and resume operation), TEL's procedure pages must not extend downward below LINK's procedure pages. Core Libraries may not extend downward below DELTA's procedure pages (since a user may have both DELTA and a core library associated with his program).

Use of the special shared processor area is controlled through the use of the BIAS option on LOCCT.


Users who have written their own special shared processors which must co-exist with TEL must make sure that TEL's

procedure pages do not extend downward below the user special shared processor procedure pages.


User Special Shared Processor -  
(Co-exists with no rebiasing of TEL)

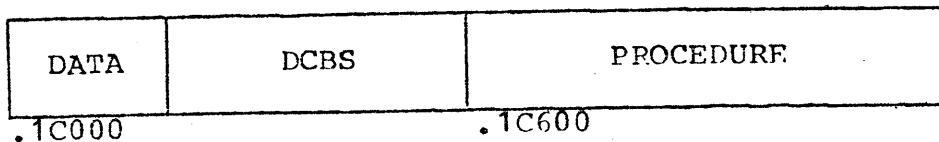

User Special Shared Processor -  
(Requires rebiasing of TEL to co-exist)

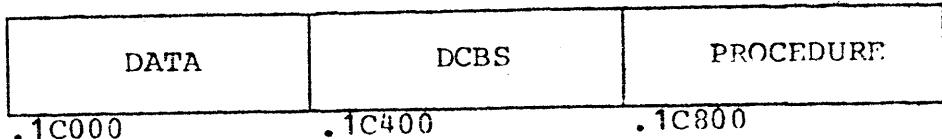

TEL as Reloaded by User

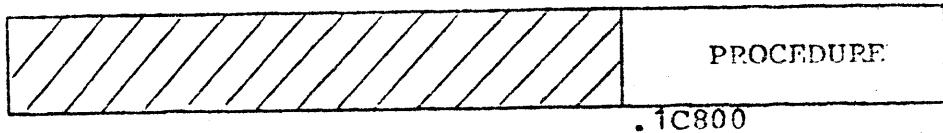

## 6.2 PRE-B00 LOAD MODULES

All load modules created under CP-V A01 or earlier systems must be reloaded to run under CP-V C00. Attempts to execute these obsolete load modules on CP-V C00 will abort the user with the error code

"A560 LOAD MODULE IS PPE-B00"

A conversion package (707000-96B00) is available from the Software Library for UTS-D00 and CP-V A00/A01, which may be used to reload the necessary programs prior to installing CP-V C00. (See 707000-11B00, Section 6.1.3 and 707000-91B00 for complete information.)

## 6.3 OTHER PRE-B00 INCOMPATIBILITIES

Conversion to CP-V C00 from UTS-D00 or CP-V A00/A01 involves the same restrictions as conversion to CP-V B00.

The -11 for B00 (707000-11B00) describes these incompatibilities in detail and should be referenced if there are questions regarding the conversion.

7.0

RESTRICTIONS/KNOWN PROBLEMS

7.1

## DRSP

DRSP can no longer be used to replace a monitor overlay. In conjunction with this, the (MOSPACE,n) option has been deleted from the :SPROCS command in PASS2.

7.2

## PROCESSOR SIZE LIMITATION

The aggregate size of processors associated with a user is limited by the size of a table in module SSDAT. An in-swap user may require that the root of a shared processor, one of its overlays, a shared library, and a monitor overlay be swapped in with the user. The aggregate size of these four items cannot exceed 30K words because of the fixed length shell command list in SSDAT. If larger in-swaps are expected, SSDAT must be reassembled with the symbol PROCSIZE EQUed to the value of the largest expected aggregate size in units of K-words.

8.0

MAINTENANCE PROCEDURES

8.1

## PATCH DECK

In CP-V, corrections to problems are distributed to users via patches. Normally, only severity 1 or 2 problems will be patched. All others are closed as pending the next release.

A copy of the current patch deck which has been tested and used in a production environment is available as the file C00PATCH, in account PATCH, on the Sigma 7F in El Segundo. This file is updated once a week and a patch area of 750 words is assumed. Each patch contains the date, SIDR number, and a card sequence number. New patches are also added to the beginning of the file CHRONO-C00 (also in account PATCH). This file contains all the patches in chronological order with explanatory notes about each set of patches.

Software Services will distribute the patch files to the field on a regular basis, however, the content, distribution, and frequency of release are controlled by the Field Engineering Home Office. The local Field Engineering analyst is responsible for supplying the customer with the current patches.

8.2

## SPECIAL PATCHING PROCEDURES

In C00 CP-V, the handlers and other modules which run only unmapped may optionally be placed in UMOV, the unmapped overlay. Since these modules may either be in the UMOV overlay or in the monitor root, the following patch deck procedure is used which handles either case:

```
UMOV//  
#ELSE  
#UMOV=0  
#  
UMOV/MTAP+.22/NOP/  
.  
:  
.:
```

Therefore, patches to the modules optionally contained in UMOV will be patched as being in that overlay and will work for systems not using that overlay as well. See the System Management section of the -91 (707000-91C00) for the names of these modules.

Due to the new SYSGEN procedures, the module ECBCHECK may be placed in either of two overlays. If TP is present in the system, ECBCHECK is placed in overlay TQOV2. If the system has no TP, ECBCHECK is placed in its own overlay ECBOV.

Patches to ECBCHECK will be based on the conditional presence of the particular overlay. Therefore, patches to ECBCHECK will appear in both overlays but will be skipped if that overlay is not present in the system.

ECBOV//  
ECBOV/ECBCHECK+.150/NOP/

.

.

.

TQOV2//  
TQOV2/ECBCHECK+.150/NOP/

.

.

TQOV2/TPQ2+.432/NOP/

.

.

.

Other modules which have varying structures based on SYSGEN parameters (such as COC, Fault Handlers, etc.) will also be maintained using conditional patching procedures.

### 8.3 PROBLEM REPORTING

Difficulties encountered in CP-V C00, as well as improvements, should be reported through the SIDR system. Use of the SIDR system is described in the PAL (Program Availability List) Manual.

The system catalog number for CP-V is 707000. Program catalog numbers to be used in submitting SIDRs should reflect the following functional areas:

707001	File Maintenance
707002	File Management
707003	System Management (including Real Time)
707004	Communications
707005	Recovery
707006	Software Checks
707007	Operator Communications
707008	SYSGEN
707009	Debug
707010	Loaders
707011	Symbionts
707012	Accounting & Performance

707013	Monitor Services (including FNQ/DEQ)
707014	Initialization
707015	Reliability
707016	Job Processors
707017	Utility Processors
707018	Miscellaneous
707019	Transaction Processing

9.0 MONITOR SIZING

## 9.1 GENERAL CORE REQUIREMENTS

The optional features of CP-V C00 are listed below with their resident monitor core requirements.

IRBT	IRBT Support	3 pages + 1 page* per IRBT device
2780	& IRBT Support	4 1/4 pages + 1 page* per 7605 device
7670	& IRBT Support	4 1/2 pages + 1 page* per IRBT device
2780	& 7670 & IRBT Support	5 1/2 pages + 1 page* per 7605 device
2780	Support	2 1/4 pages + 1/2 page* per 7605 device
7670	Support	1 1/2 pages
2780	& 7670 Support	3 1/2 pages + 1/2 page* per 7605 device
TP	TP Modules	2 1/2 pages
	Additional for Message Mode Lines	1 1/2 pages + 1 buffer page** per MOC line
	Additional for Queue	5 pages**
	Also 2-5 pages of the TIC & TPC modules may be temporarily locked in memory during processing.	

\* These pages are subtracted from the maximum user size, but not from the swap space when the line is not logged on. Note that on large-core machines maximum user size is not affected by these pages since it is limited by other factors.

\*\* These pages are only required when TP is active.

RA      Read Ahead Modules      1 page

For Table Size, see RASIZE description on :IMC option

RT      Real Time Modules      1 1/2 pages

Additional for RESDF      number of pages specified by  
SYSGEN

Additional for DYNRESDF number of pages specified by  
SYSGEN\*

---

- \* These pages are subtracted from the maximum user size, but are not actually acquired until they are needed.

9.2

## MONITOR TABLE SIZES BASED ON SYSGEN PARAMETERS

Keyword

:SPROCS	9 1/2 words per shared processor entry + 1/2 word per entry if disk pack swapper + 1/2 word per entry if (BIG) specified (Maximum 10 1/2 words per entry)
:IMC	1 word per physical work page (PWP,n)* 8 1/4 words per user (n+m+p) (MAXOL,n)+(MAXB,m) + 4 1/4 words per ghost job +(MAXG,p) 22 words initially + 3 words per entry (RASIZE,n) + 1/4 word per entry if (BIG) specified
:COC	4 words per buffer (BUFFERS,n) 6 1/4 words per line (LINES,n) 1 word per buffer (RING,n) 4 words per ECB (ECB,n)
:MON	2 words per entry (ENQ,n) 34 words per MPOOL (MPOOL,n) 40 words per CPOOL (CPOOL,n) 9 words per IOQ (QUEUE,n) 19 words per CFU (CFU,n) Patch space (n words) (MPATCH,n) 1/4 word per physical page (CORE,n) + 1/4 word per physical page if (BIG) specified (m-X'62') words (ORG,m) - 310 words for Sigma 9 traps (SIG9) 480 words for X560 traps (X560) - 44 words for Sigma 7 traps (SIG7) or (SIC6) 1781 words for MINICOC (MINICOC) 2215 words for COC neither (TP) nor (MINICOC) 2710 words for TPCOC (TP)*
:INTLB	1 1/4 words for every label (label,n,m)
:FRGD	12 words per entry (NINT,n) See RT size for RESDF and DYNRESDF

---

\* TP systems only.

:CHAN        2 words per CHANNEL (CIT entry)

:DEVICE      15 words per DEVICE (DCT entry)

              + 3 1/2 words per tape device (AVR tables)

              + 3 1/2 words per (PRIV) disk pack (AVR tables)

              + 8 words per public RAD or pack (HGP tables)

              + n words per private pack

              n = 20 for 7274 } assuming default  
                       20 for 7271 } logical cylinder  
                       35 for 7275 } sizes

              + 5 words per RBT device

              + 7 words per RAD or disk pack model

              + 7 - 74 word CLIST per device

              PUNCH = 74 words

              DP     = 12 words

              other = 6-8 words

              non-standard device-variable

              + 4 words per non-standard device type

:RES        1/2 word per specified RES

              + 6 1/4 words per RES option

              + 1/4 word per (RES option)\*(number of partitions)

:PART       6 3/4 words per partition

:LDEV       3/4 word per entry

:OPL        1 1/4 words per non-standard entry

:SDEVICE    3 words per symbiont device

              + (4 1/2 words)\*(MXSTRM value)

10.0 CP-V C00 TEST PROCEDURES

## 10.1 THE TEST TAPE

The QUAC TEST tape (707000-76C00) is an FSAVE tape, INSN 19A0, containing the C00 test case library in account C7308398. The test case library consists of job sequences and the files necessary to run them. Test cases are organized in groups which exercise a particular area of the system. These groups are described below. An asterisk indicates a new C00 group.

*88TPDMS	TP-DMS Sample Application
*88TPSIM	TP-Simulator Tests
*88TPTIC	TP-TIC/QUEUE Tests
*88TPTPC	TP-TPC/QUEUE Tests
*88TPPFM	TP-Performance Tests
99GROUP1	General Exerciser
99GROUPEB	Job Step Control
99GROUPEE	Multibatch Scheduler (Partitions)
99GROUPEE1	Multibatch Scheduler (Resources)
99GROUPG	Swapper
99GROUPGA	LDEV
99GROUPIA	Monitor CALs
99GROUPID	Shared Processors
99GROUPPJ	File Management
99GROUPJA	ANS Tapes
99GROUPJB	Private Pack Tests
99GROUPKA	BACKUP, FILL, PURGE
99GROUPLH	DRSP
99GROUPNQ	ENQUEUE/DEQUEUE
99GROUPPA	CCI
99GROUPPQ	SUPER, CONTROL, SHOW
99GROUPRB	LOADER
99GROUPRMA	SYSCON/RMA
*99GROUPRP	Restricted Processors
99GROUPRT	Real Time
99GROUPSA	PCL
99GROUPSC	BATCH
99GROUPT	Language Processors

A file 'LIBLIST' on the QUAC TEST tape contains the names and descriptions of the individual tests within each group. The test cases are identified by using the test name as the extended accounting information of the !JOB command. Tests that should abort are designated as such in the 'LIBLIST' file.

Most test cases are self-sufficient and rely on operator intervention only for tape mounting and key-in responses. Where operator intervention is required (as in the TP and RT tests), comprehensive instructions are displayed on the operator's console.

## 10.2 USE OF THE TEST TAPE

The following job is used to restore the QUAC TEST tape library, to authorize accounts, and initialize the system controls.

```
!JOB :SYS,LBE,7  
!LIMIT (9T,1),(CORE,50)  
!FRES  
+VOL  
19A0  
+END  
!BATCH 99QUAC.C7308398  
!FIN
```

Due to the special system control parameters necessary for certain tests, only one group should be run at a time. A group is entered into the batch stream with a

```
!BATCH groupname.C7308398
```

command. For example, to enter the PCL test cases use:

```
!JOB :SYS,LBE,7  
!BATCH 99GROUPSA.C7308398  
!FIN
```

Test cases can be run selectively from within groups by using the DUCK program on-line. A description of how to use DUCK is in the file 'DUCKHELP' on the QUAC TEST tape. To run DUCK, copy it from account C7308398 into account :SYS and then !DUCK will start the program on-line. To run !DUCK, the user should be logged on to account C7308398,CPV000003121.

## 10.3 UPDATING THE TEST LIBRARY

Test cases can be added or deleted by editing the relevant 88 or 99 GROUP. See the Time Sharing Reference Manual (90 09 07F) for Edit procedures. A new test tape can be generated by the following commands:

```
!JOB :SYS,LBE,7  
!BATCH QUAC.C7308398  
!FIN
```

Some tests require processors and libraries which are not distributed with the CP-V releases. A list of the processors and libraries included in the C00 release can be found in Section 4. The installation can create a test tape containing all the necessary processors by restoring the QUAC tape under its present system and running the following (sample) job:

```
!JOB
!LIMIT (9T,1)
!MESSAGE **USE OUTPUT TAPE#XXXX,RING IN**
!FSAVE
+DUMP
+SELECT
:SYS  DICTIONARY          (required for MANAGE)
:SYS  DMSDUMP }           DMS Modules
:SYS  DMSINIT }
:SYS  DMSLOAD }
:SYS  EDMSDUMP }
:SYS  EDMSFDP }           EDMS Modules
:SYS  EDMSINIT }
:SYS  EDMSLOAD }
:SYS  EDMSSUMS }
:SYS  FILEUP               (required for MANAGE)
:SYS  MANAGE
:SYS  REPORT
:SYS  RETRIEVE             (required for MANAGE)
C7308398
DMSLIB
EDMSLIB
+END
```

XEROX

# Program Description

Page 1 of 3

Catalog No. 707000-11C00

## C00-11 ADDENDUM

<u>Section</u>	<u>Title</u>	<u>Page</u>
1.0	C00 LISTING TAPES (ELEMENT 707000-56C00)	2
2.0	MODIFICATIONS TO SYSGEN PROCEDURES FOR PERFORMING A SYSGEN ON A XEROX 560	2
3.0	MODIFICATIONS TO SYSGEN PROCEDURES FOR PERFORMING SYSGEN ON A COC-LESS SYSTEM	3
4.0	DEFAULT LIST FOR SHARED PROCESSORS	3

### 1.0 C00 LISTING TAPES (Element 707000-56C00)

The listings provided on the C00-56 release element have been found to be incorrect for the following list of modules.

BACKUP  
CLSTP  
FBCD  
MTAP  
NSLP  
OBSE  
OPLO  
THEUNCOC

It is suggested, that for patching and/or development purposes, the above module listings be obtained from an assembly of the CI and SI provided in the -26/46/66 release elements.

### 2.0 MODIFICATIONS TO SYSGEN PROCEDURES FOR PERFORMING A SYSGEN ON A XEROX 560

When performing a SYSGEN on a Xerox 560 using the starter PO tape, it is necessary to utilize boot-time reconfiguration and partitioning commands to remove the 9T device specified in the starter PO tape system. An example of the necessary command cards to accomplish this follow:

```
:TYPE TY7012,A01
:TYPE LP7445,A02
:TYPE CR7140,A03
:TYPE DT3345,A80 (note changed address)
:TYPE DP7271,AE0
:TYPE ME7611,A05
:END
```

The SUPER authorizations for the accounts :SYS, LBE and :COOSGEN,CP-V as shown in Section 5.8, Example 2 of the C00-11, page 45, must be changed so that the line:

--BM9T=1; OM9T=1

is followed by the line:

--BMDT=1; OMDT=1

This is referenced in Section 5.5, Step 2, page 37 of the C00-11.

Additionally, when using !FRES to restore the release tape as in Section 5.8, Example 3 of the COO-11, page 46, the !LIMIT card must be changed from (9T,1) to (DT,1) and a !ASSIGN card must be added just before the !FRES card which has the following format:

```
!ASSIGN M:EI,(DEVICE,DT)
```

This is referenced in Section 5.5, Step 3, page 37 of the COO-11.

When defining the target machine configuration for a system which will only be run on a Xerox 560, and therefore has only 3345 or NS Tape Drives, it is advisable to utilize the mnemonic "9T" instead of "DT" to specify the tape drives and to define the attributes as for the "DT" tape drives as follows:

```
:DEVICE 9TACO,(MOD,3345,3340),(T),(IO),(BIN),;  
:      (HAND,NSTAP,NSTAPCU),(CLIST,8),(R),(DD),(CC)
```

#### 3.0 MODIFICATIONS TO SYSGEN PROCEDURES FOR PERFORMING SYSGEN ON A COC-LESS SYSTEM

All of the SYSGEN job procedures provided with the COO release are set up to run in the log-on account (that is, no account specifications appear on the !JOB cards). When submitting these jobs from the operator's console using the BATCH processor in the ghost mode, it is necessary to supply the proper SYSGEN account on the !JOB cards, otherwise the SYSGEN will be performed in the :SYS account which will not work.

#### 4.0 DEFAULT LIST FOR SHARED PROCESSORS

The default list of shared processors has been shortened for COO. The processors which are no longer shared by default, and the number of overlays for each, are:

BASIC	2
BATCH	-
EDIT	-
FORT	3
METASYM	2
PCL	-

0024: KOCHANOWSKI, SG06 11/11/75 11:03

DAT  
\$CDEF  
\$CGENJOB1  
\$CGENJOB2  
\$CLOCCTS  
\$CPYSTD  
\$DEFJOB  
\$GENJOB1  
\$GENJOB2  
\$GENJOB3  
\$GENMINI1  
\$LOCCTS  
\$NEWCCJOB  
X \$PASS2

\$P2MINI  
\$P2UNCOC

ACCT  
ACCTSUM

ADD

ALL

ALLYCAT

ALLYHD

ALLYTL

ALTCP

ANALZ

ANALZ01

ANALZ02

ANALZ03

ANSL

AROL

ASSGR

AVR

BACKUP

BACKUPA

BASHANDL

BASHANDL2

BATCH1

BATCH2

BITOTM

BLDCB

BOOTSUBR

BPM

BSCIO

BUFF

CALPROC

CCIR

CCITABLS

CCIO

CFUR

CHARROUT

CJ

CJENDA

CLADER

CLOCK4

CLOSE

CLS

CLSTP

CNMPROC

COC

COCD

COMBAT

COMBINE

CONMAIN

CONSUB

COOP

COPYALL

COPYTE

CΦΦ

L  
LT # ΦΦΒΦ

LT # 0031

Ron's Laden.

COPYTRAN

CRDOUT

CRDOUTL

CSECOM

CSEHAND

CSES7

CSES9

CSEX560

CYCUSR

COODEF

COODEF.COM

COOLBCCT

COOPASS2

COOPASS3

DATADEF

DEBUG

DEBUGR

DEFROM

DELPRI

DELUTL

DEVDMPI

DEVTRAN

DFCM

DFDCBS

DIAG

DISPLAY

DLT

DLTA

DPSIO

DRSPROM

DSCI0

DUMP

EAPL

ECBBLK

ECBCHECK

ECBINIT

ECBOV

ECBPOST

EDITROM

ELLACSL

ELLA DSP

ELLAROUT

ELLASUM

ELLATMD

ENQ0

ENQ0BV

ENQUE

ENTRY

ERHNDLR

ERRFIL

ERRMSGE

ERRMWROM

ERROR

ERRTEXT

ESTD

EVL

FAUTH

FBCD

FILLA

FILLOCB

FILLDCBA

FILLROM

FILTRAN

FIN

FIXARG

FIX1

FRESBO

FRGD

FSAVEBO  
GACROM  
GENMDG  
GENMDO  
GERM  
GETARG  
GETFIELD  
GETMAIN  
GETUSER#  
GHGSTSI  
GHGST1D  
GPHGP  
GRAN  
GRAND  
GRANSUB  
GRSUB  
HASPIG  
HEXDUMP  
HGPSTK  
HSPM  
IMC  
INITIAL  
INITRCVR  
INSYM  
INTARG  
IN1  
IN2  
I0D  
I0G  
I0RT  
JDL  
JIT  
JOBTR  
JULIAN  
KEYIN  
KEYN  
KEYSUB  
LABELROM  
LBLT  
LDEVROM  
LDLNK  
LDR  
LIMR  
LIST  
LISTQIP  
LNK  
LNKTRC  
LOADR  
LOCCTR0M  
LOG0NROM  
LOGRT  
LP:TP0Q  
LTAPE  
M:ALDCB  
M:BIDCB  
M:BODCB  
M:CDCB  
M:CIDCB  
M:CSDCB  
M:D0DCB  
M:EIDCB  
M:EODCB  
M:G0DCB  
M:LIDCB  
M:LLDCB  
M:L0DCB  
M:MOONUM  
M:SCDCB

M:PDCB  
M:SIDCB  
M:SLDCB  
M:SUDCB  
MAGTAPE  
MAILBX  
MBS  
MINICOC  
MISOV  
MM  
MMNR  
MACIOP  
MDD  
MODIFY  
MTAP  
MUL  
MULSV  
NSLP  
NSTAP  
OBSE  
OCPGST  
OCPIO  
OPEN  
OPENTP  
OPLS  
OPN  
OPND  
OPNF  
OPNL  
OPNLD  
OPNSTARF  
OPNTP  
OUTSYM  
PART  
PASS3ROM  
PCLLIST  
PCLR0M  
PFSR  
PL0T  
PM  
PMD  
PM0DAT  
PBS  
PPS  
PREUPLOAD  
PRTERR  
PS1  
PS2  
PURGE  
PURGEA  
PV  
PWP  
P0DCBS  
P2CCI  
P2C0C  
P2DCBS  
P2LDV  
P20PL  
P2RES  
P2SCPU  
QREP  
GREMAKE  
RA  
RAS  
RATER0M  
RBBATM  
RBBATR  
RBSSS

RCVCTL  
RCVDEF  
RCVRIO  
RCVTAB  
RDERLOG  
RDF  
RDL  
RDWRT  
READBI  
RECONFIG  
RECOVER2  
REQDC  
RHLOADR  
RMAOV  
RTB00T  
RTNR  
RTOV  
RTPFSR  
RTPROCS  
RTR00T  
RUNR  
RUNROM  
RVGR0M  
S:0VRLYR  
SACT  
SAPL  
SCHDSUB  
SCHE  
SDEVICE  
SEGLD  
SHOWROM  
SIG7FDP  
SMCN  
SNAP  
SPROCS  
SQZ  
SSDAT  
SSSR0M  
SSTD  
STATSR0M  
STEP  
STEPOVR  
STNUTL  
ST0RVLP  
STPNR  
SUBR  
SUM  
SUMDCB  
SUPCLS  
SUPER1  
SUPER2  
SUPER3  
SUSPTERM  
SWAPPER  
SYMFILS  
SYMSUBR  
SYMTAB  
SYSCN  
SYSMAKO  
SYSMAK1  
T:DSMNT  
T:JOBENT  
T:OV  
TABLES  
TAPEFCN  
TCATCH  
TELLUSR  
TELROM

TELSCOPE  
TEXTARG  
TFDUTL  
TFILE  
THEUNCOC  
TIC  
TICDCBS  
TIM  
TOPROOT  
TP:TP0  
TPC  
TPCDMS  
TPCOC  
TPCSIM  
TPECHST  
TPG  
TPG1ROM  
TPQ1  
TPQ2  
TQ0V1  
TQ0V2  
TQR00T  
TRAPC  
TREER  
TS10  
TSTHGP  
TYPR  
UBCHAN  
UCAL  
UM0V  
UTILITY  
UTMBPMBT  
UTS  
VDCB  
V210  
WRT  
WRTO  
WRTF  
XDLT  
XLIMIT  
XMONITOR  
XPART  
ZLOADR  
278010  
327010  
7TAP  
744610  
:ACCTLG  
:PROCS  
:RBLUG  
:USERS  
ERRFILE  
MJB  
PATCH  
BLIB:  
MAILBOX  
:DIC  
:LIB  
BLIB:  
S:SRT  
:DIC  
:LIB  
BLIB:  
\$:::BMERGE  
\$:::BSORT  
\$:::CMERGE  
\$:::CSORT  
\$:::UMERGE

\$::USORT  
CRROOT  
CRSRTP  
CRSRTP0  
CRSRTP01  
CRSRTP1  
CRSRTP11  
CRSRTP2  
CRSRTP3  
CRSRTP31  
CRTPRE  
CSRTDCBS  
CSRTMRGE  
CTSRTP  
CTSRTP0  
CTSRTP01  
CTSRTP1  
CTSRTP11  
CTSRTP2  
CTSRTP3  
CTSRTP31  
LOADSORT  
LOCCTBMERGE  
LOCCTBSORT  
LOCCTUMERGE  
LOCCTUSORT  
MERGE  
MERGEINA  
MERGEINB  
MERGEO  
\$::DGB1  
SORT  
SORTTEST  
SPRE  
SRROOT  
SRP  
SRP0  
SRP01  
SRP1  
SRP11  
SRP2  
SRP3  
SRP31  
SSP  
SSP0  
SSP01  
SSP1  
SSP11  
SSP2  
SSP3  
SSP31  
\$::BPS  
\$::BS  
\$::STDMMET  
\$901692  
:BLIB  
:DIC  
:LIB  
:MONSTK  
ADAMPROCS  
ADMDSECT  
ALISTFILE  
ALLFILES  
ALLFILESCI  
ANLZ  
ANS  
ANSFSI  
ANSMCI

APTERYX  
BOOK  
BOOKHELP  
CAG  
CARDLIST  
CBUG  
CD  
CHK  
CHKCI  
COCSUM  
COMP  
COMPARE  
COMPARECI  
COMPCI  
DB  
DCPRCS  
DCSUBS  
DCSUBSCI  
DD  
DEFCOM  
DEFCOMCI  
DEL  
DELCI  
DG  
DT  
DUCK  
DUCKCI  
FILER  
FILERCI  
FILERCI2  
FUMJOB  
GRAPH  
GRAPHSI  
GRPGSI  
HELP  
I9901692  
INITVOL  
INITVOLCI  
J:FEXEC  
J:F1EXEC  
J:LLEXEC  
JOB  
JOBMNSTK  
KEY  
KEYER  
KEYER1SI  
KEYER2SI  
LIB  
LIST  
LISTCI  
LISTFILE  
LMNCHK  
LMNCHKCI  
LOAD  
LOADCI  
LOADDEVDM  
LOCCT  
LOCCTCI  
LS  
LSTD  
LSTD  
LUS  
MAP  
MAPCI  
META  
META  
MOVE  
MPPOOL

MTEMF  
MTEMFCI  
P:SYSTEM  
PATCH  
PATCHCI  
PLUSCARD  
PLUSCARDCI  
PTAPB0  
PTAPCI  
PTRPB0  
PTRPCI  
RENEW  
RENEWALL  
RENEWALLCI  
RENEWCI  
RENEWSTD  
RENEWSTDCI  
REW  
REWCI  
RTLOAD  
RTLOADADI  
S:ANLZ  
S:ARG  
S:CAG  
S:CARDLIST  
S:CBUG  
S:CD  
S:CCSUM  
S:CVM  
S:CVMD  
S:DB  
S:DD  
S:DELTA  
S:DG  
S:DIGIT  
S:DT  
S:ERMSG  
S:F1  
S:F2  
S:GRAPH1  
S:GRAPH2  
S:GRAPH3  
S:INT  
S:JITWORD  
S:KEY  
S:LI  
S:LIB  
S:LS  
S:LUS  
S:MOVE  
S:MP00L  
S:MS  
S:P:SYSTEM  
S:PRNTER  
S:SC1  
S:SIDR  
S:SNAP  
S:SQ  
S:SUA  
S:TIME  
S:TT  
S:TTV  
S:UT  
S:WAIT  
S:WFL  
S:WFT  
S:XOPEN  
SCOMPARE

SGT  
SGTCI  
SIDR  
SKDIO  
SKDI0CI  
SNAP  
SNOOP  
SN00PCI  
SPY  
SPYCI  
SQ  
SUA  
T\$901692  
TCOPY  
TCOPYCI  
TCT  
TCTCI  
TPJSCAN  
TPJSCANSI  
TPJSCAN2SI  
TRACK  
TRACKCI  
TT  
TTV  
U:MONSTK  
UPDATE  
UPDATE1SI  
UPDATE2SI  
UT  
UTILIST  
UTILISTCI  
WFL  
WFT  
XREF  
XREFCI  
XREFJOB  
:BLIB  
:DIC  
:LIB  
:PO  
:POO  
:P1  
:P11  
APL  
APLTRMSB  
BASIC  
COBOL  
EASY  
ERRNOTES  
FLAG  
FORT  
FORTLIB  
MERGE  
METASYM  
RPG  
SIML  
SORT  
TEXT  
.. 669 FILES LISTED  
DAT  
ACGT  
ACCTSUM  
ADD  
ALLL  
ALLYCAT  
ALLYHD  
ALLYTL  
ALTCP

3531575

0031

ANALZ  
ANALZ01  
ANALZ02  
ANALZ03  
ANSL  
ARDL  
ASSGR  
AVR  
BACKUP  
BACKUPA  
BATCH1  
BATCH2  
BITOTM  
BLDCB  
BOOTSUBR  
BPM  
BSCIO  
BUFF  
CALPROC  
CCIR  
CCITABLS  
CCIO  
CFUR  
CHARROUT  
CJ  
CJENDA  
CLOCK4  
CLS  
CLSTP  
CNMPROC  
COC  
COCD  
COMBAT  
COMBINE  
CONMAIN  
CONSUB  
COOP  
COPYALL  
COPYTO  
COPYTRAN  
CRDOUT  
CRDOUTL  
CSECOM  
CSEHAND  
CSES7  
CSES9  
CSEX560  
CYCUSR  
DATADEF  
DEBUGR  
DEF  
DEFCom  
DELPRI  
DELTA  
DELUTL  
DEVDM<sup>P</sup>  
DEVTRAN  
DFDCBS  
DIAG  
DISPLAY  
DLT  
DPSIO  
DRSP  
DSCIO  
DUMP  
EAPL  
ECBBLK  
ECBCHECK

ECBINIT  
ECBPOST  
EDIT  
ELLACSL  
ELLADSP  
ELLAROOT  
ELLASUM  
ELLATMD  
ENQO  
ENQUE  
ENTRY  
ERHNDLR  
ERR:FIL  
ERRMSGE  
ERRMWR  
ERROR  
ESTD  
EVL  
FAUTH  
FBCD  
FILL  
FILLA  
FILLOCB  
FILLCBA  
FILTRAN  
FIN  
FIXARG  
FIX1  
FRES  
FRGD  
FSAVE  
GAC  
GENMDG  
GENMDO  
GERM  
GETARG  
GETFIELD  
GETMAIN  
GETUSER#  
GHOSTID  
GPHGP  
GRAN  
GRAND  
GRANSUB  
GRSUB  
HANDLERS  
HASPI0  
HEXDUMP  
HGPSTK  
HSPM  
IMC  
INITIAL  
INITRCVR  
INSYM  
INTARG  
IN1  
IN2  
I0D  
I0Q  
IORT  
JIT  
JOBR  
JULIAN  
KEYN  
KEYSUB  
LABEL  
LBLT  
LDEV

LDR  
LIMR  
LINK  
LIST  
LISTQIP  
LNKTRC  
LOADR  
LOCCT  
LOGON  
LOGRT  
LP:TP00  
M:ALDCB  
M:BIDCB  
M:B0DCB  
M:CDCB  
M:CIDCB  
M:C0DCB  
M:D0DCB  
M:EIDCB  
M:E0DCB  
M:G0DCB  
M:LIDCB  
M:LLDCB  
M:L0DCB  
M:8CDCB  
M:P0DCB  
M:SIDCB  
M:SLDCB  
M:S0DCB  
MAGTAPE  
MAILBX  
MBS  
MM  
MMNR  
MOCHIOP  
MOD  
MODIFY  
MTAP  
MUL  
NSLP  
NSTAP  
OBSE  
OCPGST  
OCPI0  
OPLO  
OPN  
OPND  
OPNF  
OPNL  
OPNLD  
OPNSTARF  
OPNTP  
OUTSYM  
PART  
PASS3  
PCL  
PCLLIST  
PFSR  
PL0T  
PM  
PMD  
PMDAT  
POS  
PPS  
PREPLLOAD  
PRTERR  
PS1  
PS2

PURGE  
PURGEA  
PV  
PWP  
PODCBS  
P2CCI  
P2COC  
P2DCBS  
P2LOV  
P2PL  
P2RES  
P2SCPU  
QPREP  
GREMAKE  
RA  
RAS  
RATES  
RBBATM  
RBBATR  
RBSSS  
RCVCTL  
RCVDEF  
RCVRIO  
RCVTAB  
RDERLOG  
RDF  
RDL  
RDWRT  
READBI  
RECONFIG  
RECOVER2  
REQDC  
RTBOOT  
RTNR  
RTPFSR  
RTPROCS  
RTROOT  
RUNR  
RUNROM  
RVGHOST  
S:BVRLYR  
SACT  
SAPL  
SCHDSUB  
SCHED  
SDEVICE  
SEGLD  
SHOW  
SIG7FDP  
SNAP  
SPROCS  
SQZ  
SSDAT  
SSSL  
SSTD  
STATS  
STEP  
STNUTL  
STORYLP  
STPNR  
SUBR  
SUM  
SUMDCB  
SUPCLS  
SUPER1  
SUPER2  
SUPER3  
SUSPTERM

SWAPPER  
SYMCN  
SYMFILS  
SYMSUBR  
SYMTAB  
SYSCN  
SYSMAKO  
SYSMAK1  
T:DSMNT  
T:JOBENT  
T:OV  
TABLES  
TAPECHST  
TAPEFCN  
TCATCH  
TEL  
TELLUSR  
TELESCOPE  
TEXTARG  
TFDUTL  
TFILE  
THEUNCOC  
TIC  
TICOCBS  
TIM  
TOPROOT  
TP:TP0  
TPC  
TPCDMS  
TPCSIM  
TPG  
TPG1  
TPG1  
TPG2  
TQR00T  
TRAPC  
TREER  
TSIO  
TSTHGP  
TYPR  
UBCHAN  
UCAL  
UTILITY  
UTMBPMBT  
UTS  
VDCB  
V210  
WRT  
WRTO  
WRTF  
XDLT  
XLIMIT  
XMONITOR  
XPART  
2780IO  
3270IO  
7TAP  
7446IO  
ALLL  
ALLYCAT  
ALTCP  
ANALZ  
ANALZ01  
ANALZ02  
ANALZ03  
ANSL  
ARDL  
ASSGR

AVR  
BACKUP  
BATCH1  
BATCH2  
BITOTM  
BLDCB  
BOOTSUSR  
CCIR  
CCITABL  
CCIO  
CHARROUT  
CLOCK4  
CLS  
CLSTP  
CNMPROC  
COC  
COMBAT  
CONMAIN  
COOP  
COPYALL  
COPYTRAN  
CSEC8M  
CSEHAND  
CSES7  
CSES9  
CSEX560  
CYCUSR  
DEF  
DEF8M  
DELTA  
DEVOMP  
DFDCBS  
DISPLAY  
DLT  
DPSIO  
DRSP  
ECBCHECK  
ECBPOST  
EDIT  
ELLAACSL  
ELLADSP  
ELLAROOT  
ELLASUM  
ELLATMD  
ENQUE  
ENTRY  
ERHNDLR  
ERR:FILE  
FAUTH  
FILL  
FILLDCB  
FIN  
FIX1  
FRES  
FRGD  
FSAVE  
GAC  
GENMDG  
GENMD8  
GETARG  
GHOST10  
GRAN  
GRAND  
GRANSUB  
HANDLERS  
HASPI0  
HGPSTK  
HSPM

IMC  
INITIAL  
INITRCVR  
INSYM  
IN1  
IOQ  
IORT  
JIT  
JOB  
KEYN  
LBLT  
LDEV  
LIMR  
LINK  
LIST  
LNKTRC  
LOADR  
LOGON  
MAGTAPE  
MAILBX  
MM  
MMNR  
MCIOB  
MTAP  
MUL  
NSLP  
NSTAP  
OBSE  
OCPGST  
OPLO  
OPN  
OPND  
OPNF  
OPNL  
OPNLD  
OPNTP  
OUTSYM  
PART  
PASS3  
PCLLIST  
PFSR  
PPS  
PREPLoad  
PRTERR  
PS1  
PURGE  
PV  
PODCBS  
P2CCI  
P2COC  
P2LDV  
P2PL  
P2RES  
P2SCPU  
GREMAKE  
RA  
RAS  
RBBATM  
RBBATR  
RBSSS  
RCVCTL  
RCVDEF  
RCVTAB  
RDERLOG  
RDF  
RDL  
RDWRT  
RECONFIG

RECOVER2  
RTNR  
RTPROCS  
RTROOT  
RUNROM  
SCHDSUB  
SCHED  
SDEVICE  
SHOW  
SPROCS  
SSDAT  
STATS  
STEP  
STPNR  
SUPER1  
SUPER2  
SWAPPER  
SYMFILS  
SYSCN  
SYSMAKO  
SYSMAK1  
T:DSMNT  
T:JOBENT  
T:OV  
TABLES  
TEL  
TELSCOPE  
THEUNCAC  
TIC  
TOPROOT  
TPC  
TPCSIM  
TPG  
TPQ2  
TQREROOT  
TREER  
TSIO  
TSTHGP  
TYPR  
UBCHAN  
UCAL  
UTMBPMBT  
V2IB  
WRTD  
WRTF  
XDLT  
XLIMIT  
XMONITOR  
XPART  
2780IB  
3270IB  
7TAP

• 537 FILES LISTED

DAT  
\$\$DEF  
\$\$DEFCOM  
\$\$LOADER  
\$\$LUCC  
\$\$PASS2  
\$\$PASS3  
\$\$SYMCN  
\$:\$STDDEF  
\$CPYSTD  
\$CO1\*\*7T  
\$CO1BASIC  
\$CO1MINI  
\$CO1NCBC  
\$CO1PSWP

ACCT : : C0130

\$C01X560  
\$DEFJOB  
\$GENJOB1  
\$GENJOB2  
\$GENJOB3  
\$LOCCTS  
ACCT  
ACCTSUM  
ADD  
ALLL  
ALLYCAT  
ALLYTL  
ALTCP  
ANALZ  
ANALZ01  
ANALZ02  
ANALZ03  
ANALZ04  
ANALZ05  
ANSL  
ARDL  
ASSGR  
BACKUP  
BACKUPA  
BASHANDL  
BASHANDL2  
BATCH1  
BATCH2  
BITSTM  
BLDCB  
BOOTSUBR  
BPM  
BSCIO  
BUFF  
CALPROC  
CCIR  
CCITABL  
CCIO  
CFUR  
CHARROUT  
CJ  
CJENDA  
CLOCK4  
CLOSE  
CLS  
CLSTP  
CNMPROC  
COC  
COCD  
COMBAT  
COMBINE  
CONMAIN  
CONSUB  
COOP  
COPYALL  
COPYTO  
COPYTRAN  
CRDOUT  
CRDOUTL  
CSECOM  
CSEHAND  
CSES7  
CSES9  
CSEX560  
CYCUSR  
DATADEF  
DEBUG  
DEBUGR

DEF  
DEFCOM  
DELPRI  
DELTA  
DELUTL  
DEVDM<sup>P</sup>  
DEVTRAN  
DFDCBS  
DIAG  
DISPLAY  
DLT  
DPSI<sup>B</sup>  
DRSP  
DSCI<sup>B</sup>  
DUMP  
EAPL  
ECBBLK  
ECBCHECK  
ECBINIT  
ECBV  
ECBPOST  
EDIT  
ELLACSL  
ELLADSP  
ELLAROOT  
ELLASUM  
ELLATMD  
ENQ<sup>B</sup>  
ENQ<sup>B</sup>V  
ENQUE  
ENTRY  
ERHNDLR  
ERR:FIL  
ERRMSGE  
ERRMWR  
ERROR  
ERRTEXT  
ESTD  
EVL  
FAUTH  
FBCD  
FILL  
FILLA  
FILLD<sup>C</sup>B  
FILLD<sup>C</sup>BA  
FILTRAN  
FIN  
FIXARG  
FIXHGP  
FIXSUB  
FIX1  
FRES  
FRG<sup>D</sup>  
FSAVE  
GAC  
GENMDG  
GENMDO  
GERM  
GETARG  
GETFIELD  
GETMAIN  
GETUSER#  
GH<sup>E</sup>STSI  
GH<sup>E</sup>STID  
GPHGP  
GRAN  
GRAND  
GRANSUB

GRSUB  
HASPIG  
HEXDUMP  
HGPSTK  
HSPM  
IMC  
INITIAL  
INITRCVR  
INSYM  
INTARG  
IN1  
IN2  
IOD  
IOQ  
IORT  
JIT  
JOBTR  
JULIAN  
KEYIN  
KEYN  
KEYSUB  
LABEL  
LBLT  
LDEV  
LDLINK  
LDR  
LIMR  
LINK  
LIST  
LISTQIP  
LNKTRG  
LOADR  
LOCCT  
LOGON  
LOGRT  
LP:TP00  
LTAPE  
M:ALDCB  
M:BIDCB  
M:BUDCB  
M:CDCB  
M:CIDCB  
M:CIDCB  
M:DUDCB  
M:EIDCB  
M:EUDCB  
M:GUDCB  
M:LIDCB  
M:LLDCB  
M:LUDCB  
M:MUDNUM  
M:UCDCB  
M:PUDCB  
M:SIDCB  
M:SLDCB  
M:SUDCB  
MAGTAPE  
MAILBX  
MBS  
MINICBC  
MISOV  
MM  
MMNR  
MOCHOP  
MOD  
MODIFY  
MREF  
MTAP

MUL  
MULBV  
NSLP  
NSTAP  
OBSE  
OCQ  
OPEN  
OPENTP  
OPLG  
OPN  
OPND  
OPNF  
OPNL  
OPNLD  
OPNSTARF  
OPNTP  
OUTSYM  
PART  
PASS3  
PCL  
PCLLIST  
PFSR  
PLOT  
PM  
PMD  
PMDAT  
PBS  
PPS  
PREUPLOAD  
PRTERR  
PS1  
PS2  
PURGE  
PURGEA  
PV  
PWP  
PODCBS  
P2CCI  
P2COC  
P2DCBS  
P2LDV  
P2PL  
P2RES  
P2SCPU  
OPREP  
GREMAKE  
RA  
RAS  
RATES  
RBBAFM  
RBBATR  
RBSSS  
RCVCTL  
RCVDEF  
RCVRIO  
RCVTAB  
RDERLOG  
RDF  
RDL  
RDWRT  
READBI  
RECONFIG  
RECOVER2  
REQDC  
RMAOV  
RTBOOT  
RTNR  
RTOV

RTPFSR  
RTPR0CS  
RTROOT  
RUNR  
RUNROM  
RVGH0ST  
S:0VRLYR  
SACT  
SAPL  
SAVGET  
SCHEDSUB  
SCRAM  
SDEVICE  
SEGLD  
SETAMR  
SHOW  
SIG7FDP  
SNAP  
SPROCS  
SQZ  
SSDAT  
SSSL  
SSTD  
STATS  
STEP  
STEP0VR  
STNUTL  
ST0RVL0P  
STPNR  
SUBR  
SUM  
SUMDCB  
SUPCLS  
SUPER1  
SUPER2  
SUPER3  
SUSPTERM  
SWAPPER  
SYMC0N  
SYMFILS  
SYMSUBR  
SYMTAB  
SYSCN  
SYSMAKO  
SYSMAK1  
T:DSMNT  
T:JOBENT  
T:OV  
TABLES  
TAPECHST  
TAPEFCN  
TCATCH  
TELLUSR  
TELMN  
TELSCOPE  
TERR  
TEXTARG  
TFDUTL  
TFILE  
THEUNC0C  
TICDCBS  
TICINIT  
TICKEYIN  
TICLABOR  
TICPROCS  
TICROOT  
TIM

TCPROOT  
TP:TP0  
TPC  
TPCDMS  
TPC9C  
TPCSIM  
TPG  
TPG1  
TPPROCS  
TPQ1  
TPQ2  
TQ8V1  
TQ8V2  
TQR00T  
TRAPC  
TREER  
TS10  
TSTHGP  
TYPR  
UBCHAN  
UCAL  
UM8V  
UTILITY  
UTMBPMBT  
UTS  
VDCB  
V2I0  
WRT  
WRD  
WRTF  
XDLT  
XLIMIT  
XMONITOR  
XPART  
278010  
327010  
7TAP  
744610  
99TEST  
ANALZ04  
ANALZ05  
BASHANDL  
BPM  
C8C  
DIAG  
FIXHGP  
FIXSUB  
JIT  
LP:TP00  
MINICOC  
MREF  
BCQ  
RTPROCS  
SAVGET  
SCRAM  
SETAMR  
SIG7FDP  
TELMN  
TERR  
TICINIT  
TICKYIN  
TICLABOR  
TICPROCS  
TICR00T  
TP:TP0  
TPC8C  
TPPROCS  
UTS

\$IBPS  
\$IBS  
\$STDIMET  
\$901692  
:BLIB  
:DIC  
:LIB  
:MNSTK  
ADAMPROCS  
ADMDSECT  
ALISTFILE  
ALLFILES  
ALLFILESCI  
ANLZ  
ANS  
ANSFSI  
ANSMCI  
APFUM  
APTERYX  
ASIG7  
BOOK  
BOOKHELP  
CAG  
CALMBN  
CALMBN:C  
CALMNE  
CALMNE:C  
CARDLIST  
CBUG  
CD  
CHK  
CHKCI  
CHKX  
CMDSECT  
CMPR  
COBCOM  
COCSUM  
COMP  
COMPARE  
COMPARECI  
COMPCI  
CPVEXJOB  
CO1INFO  
DB  
DCPROMCS  
DCSUBS  
DCSUBSCI  
DD  
DEFCOM  
DEFCOMCI  
DEL  
DELCI  
DG  
DT  
DUCK  
DUCKCI  
EDIT  
EDITCI  
ELLAX  
EXJOBINFO  
FFHELP1  
FFHELP2  
FFHELP3  
FFHELP4  
FFHELP5  
FFHELP6  
FILER  
FILERCI

FILERCI2

FUMJOB

GRAPH

GRAPHSI

GRB0

GRPG

GRPOS1

HELP

I\$901692

INFO

INFOCI

INITVOL

INITVOLCI

J:FEXEC

J:F1EXEC

J:LLEXEC

JB

JCL

JCL1

JOB

JOBFORT

JOBMNSTK

J1

KEY

KEYER

KEYER1SI

KEYER2SI

LIB

LIST

LISTCI

LISTFILE

LMNCHK

LMNCHKCI

LOAD

LOADCI

LOADDEVDM

LOCCT

LOCCTCI

LOOK

LPBBCOBOL

LPCOB

LPCOBOL

LPMETA

LS

LSTD

LSTD1

LUS

MAP

MAPCI

METAFUM

METAFUMCI

MICLIST

MICLISTCI

MOVE

MPBOL

MRDS

MTEMF

MTEMFCI

P:SYSTEM

PATCH

PATCHCI

PLUSCARD

PLUSCARDCI

PTAPB0

PTAPCI

PTRPB0

PTRPCI

RENEW

RENEWALL  
RENEWALLCI  
RENEWCI  
RENEWSTD  
RENEWSTDCI  
REW  
REWCI  
RTLOAD  
RTLOADCI  
S:ANLZ  
S:ARG  
S:CAG  
S:CARDBLIST  
S:CBUG  
S:CD  
S:CCCSUM  
S:CVM  
S:CVMD  
S:DB  
S:DD  
S:DELTA  
S:DG  
S:DIGIT  
S:DT  
S:ERMSG  
S:F1  
S:F2  
S:GRAPH1  
S:GRAPH2  
S:GRAPH3  
S:INT  
S:JITWORD  
S:KEY  
S:LI  
S:LIB  
S:LS  
S:LUS  
S:MOVE  
S:MP00L  
S:MRDS  
S:MS  
S:P.SYSTEM  
S:PRNTER  
S:SC1  
S:SIDR  
S:SNAP  
S:SQ  
S:SUA  
S:TIME  
S:TT  
S:TTV  
S:UT  
S:WAIT  
S:WFL  
S:WFT  
S:XOPEN  
SCOMPARE  
SGT  
SGTCI  
SIDR  
SKDIO  
SKDI0CI  
SNAP  
SN00P  
SN00PCI  
SPY  
SPYCI  
SQ

SUA  
T\$901692

TCOPY

TCOPYC1

TCT

TCTCI

TPJSCAN

TPJSCANSI

TPJSCAN2SI

TRACK

TRACKC1

TT

TTV

U:M8N8TK

UPDATE

UPDATE1SI

UPDATE2SI

USERS

UT

UTILIST

UTILISTC1

WFL

WFT

XREF

XREFC1

XREFJOB

XREFJOB1

.. 654 FILES LISTED

DAT

\$CCI

\$CENTSYS

\$DB

\$DEBUG

\$DISKFM

\$FILEMAINT

\$HANDLER

\$INITREC

\$LOADER

\$PCL

\$REMOTE

\$SYMC80P

\$TAPEFM

CYCUSR

EXTRACT

EXTRACTC1

RTPR0CS

ACCT

ACCTSUMP

ADD

ALLL

ALLYCAT

ALLYTL

ALTCP

ANALZ

ANALZ01

ANALZ02

ANALZ03

ANALZ04

ANALZ05

ANSL

ARDL

ASSGR

BACKUP

BASHANDL

BATCH1

BATCH2

BITSTM

BLDCB

BOOTSUBR

BSCIO

BUFF

CALPROC

CCIR

CCITABLS

CCIO

CFUR

CHARROUT

CJ

CJENDA

CLOCK4

CLS

CLSTP

CNMPROC

CAC

CCCD

COMBAT

COMBINE

C0NMAIN

C0BP

COPYALL

COPYTO

COPYTRAN

CRDOUT

CRDOUTL

CSECOM

CSEHAND

CSES7

CSES9

CSEX560

CYCUSR

DEBUGR

DEF

DEFCOM

DELPRI

DELTA

DELUTL

DEVDMF

DEVTRAN

DFDCBS

DISPLAY

DLT

DPSIO

DRSP

DSCI0

DUMP

EAPL

ECBBLK

ECBCHECK

ECBINIT

ECBPOST

EDIT

ELLACSL

ELLAR0BT

ELLASUM

ENQ0

ENQUE

ENTRY

ERHNDLR

ERR:FIL

ERROR

ESTD

EVL

FAUTH

FBCD

FILL

FILLDCB

FILDCBA  
FILTRAN  
FIN  
FIXARG  
FIXHGP  
FIXSUB  
FIX1  
FRES  
FRGD  
FSAVE  
GAC  
GENMD  
GERM  
GETARG  
GETFIELD  
GETUSER#  
GHOST1D  
GPHGP  
GRAN  
GRAND  
GRANSUB  
GRSUB  
HASPI0  
HEXDUMP  
HGPSTK  
HSPM  
IMC  
INITIAL  
INITRCVR  
INSYM  
INTARG  
IN1  
IN2  
I0D  
I8Q  
IORT  
JIT  
JUBR  
JULIAN  
KEYN  
KEYSUB  
LBLT  
LDEV  
LDR  
LIMR  
LINK  
LIST  
LISTQIP  
LNKTRC  
LOADR  
LOCCT  
LOGON  
LOGRT  
M:EIDCB  
M:EODCB  
MAGTAPE  
MAILBX  
MBS  
MM  
MMNR  
MOCIOP  
MOD  
MODIFY  
MTAP  
MUL  
NSLP  
NSTAP  
OBSE

BCG  
BPL0  
BPN  
BPN0  
BPNF  
BPNL  
BPNLD  
BPNSTARF  
BPNTP  
BUTSYM  
PART  
PASS3  
PCL  
PCLLIST  
PFSR  
PL0T  
PM  
PMD  
PMDAT  
POS  
PPS  
PREUPLOAD  
PRTERR  
PS1  
PS2  
PURGE  
PV  
PWP  
PODCBS  
P2CCI  
P2COC  
P2DCBS  
P2LDV  
P2PL  
P2RES  
P2SCPU  
QREP  
GREMAKE  
RA  
RAS  
RATES  
RBBATM  
RBBATR  
RBSSS  
RCVCTL  
RCVDEF  
RCVRIO  
RCVTAB  
RDERLOG  
RDF  
RDL  
RDWRT  
READBI  
RECONFIG  
RECOVER2  
REQDC  
RTBOOT  
RTNR  
RTPFSR  
RTROOT  
RUNR  
RUNROM  
RVGHOST  
S:0VRLYR  
SACT  
SAPL  
SCHDSUB  
SCHED

SCRAM  
SDEVICE  
SEGLD  
SHOW  
SNAP  
SPROCS

SQZ  
SSDAT  
SSSL  
SSTD  
STATS  
STEP  
STNUTL  
STORVLP  
STPNR  
SUBR  
SUMDCB  
SUPCLS  
SUPER1  
SUPER2  
SUPER3  
SUSPTERM  
SWAPPER  
SYMCON  
SYMFILS  
SYMSUBR  
SYMTAB

SYSCN  
SYSMAK  
T:DSMNT  
T:JOBENT  
T:OV

TABLES  
TAPECHST

TAPEFCN  
TCATCH  
TELLUSR  
TELSCOPE  
TEXTARG  
TFDUTL  
TFILE  
THEUNCAC  
TICDCBS  
TICINIT  
TICKEYIN  
TICLABOR  
TICROOT  
TIM

TPRROOT

TPC  
TPCDMS  
TPG

TPG1  
TPQ1  
TPQ2  
TQRROOT  
TRAPC  
TREER  
TSIO

TSTHGP  
TYPR  
UBCHAN  
UCAL  
UTILITY  
UTMBPMBT  
VDCB  
V2IO  
WRT

WRTD  
WRTF  
XDLT  
XLIMIT  
XMONITOR  
XPART  
278010  
327010  
7TAP  
744610  
• • 322 FILES LISTED