

## Associative memory retrieval induced by fluctuations in a pulsed neural network

Takashi Kanamaru and Yoichi Okabe

*RCAST, The University of Tokyo, 4-6-1 Komaba, Meguro-ku, Tokyo 153-8904, Japan*

(Received 10 January 2000)

An associative memory retrieval in a pulsed neural network composed of the FitzHugh-Nagumo neurons is investigated. The memory is represented in the spatio-temporal firing pattern of the neurons, and the memory retrieval is accomplished using the fluctuations in the system. The storage capacity of the network is investigated numerically. It is demonstrated that this pulsed neural network is capable of an alternate retrieval of two patterns.

PACS number(s): 87.10.+e, 05.45.-a, 84.35.+i, 07.05.Mh

### I. INTRODUCTION

Recently, there has been considerable interest in associative memory of neural networks composed of model neurons which change their dynamical states temporally, such as chaotic neurons, oscillator neurons, or spiking neurons [1–14]. These networks are not only of theoretical interest, but also may have a lot to do with the problem of information coding in the brain [15].

Numerous authors have investigated coupled phase oscillators [3–9], which are the general reduced model of the coupled limit-cycle oscillators. In this case, all the neurons oscillate with almost the same period, and the memory is represented in the relative phase differences of oscillators, so the neurons can store analog-valued patterns. This model has an advantage in that the usual techniques for theoretical analysis of associative memory [16,17] are applicable.

On the other hand, neural networks composed of spiking neurons also show the properties of associative memory [11–13]. In those systems, the following models are often used as spiking neurons: the Hodgkin-Huxley equation, which describes the dynamics of squid giant axons; the FitzHugh-Nagumo equation, which is the reduced model of the Hodgkin-Huxley equation; and the leaky integrate-and-fire model, which has an internal state described by a linear differential equation and a spiking mechanism with a threshold. The couplings among those neurons are accompanied with a time delay which models the time for a pulse to propagate on the axon from the presynaptic neuron to the postsynaptic neuron, and the memory is represented in the spatio-temporal firing pattern of the neurons.

Meanwhile, the physiological environment where neurons operate is thought to be highly noisy [18,19], so the effect of the fluctuations may not be neglected. Generally, stochastic resonance (SR) is a well-known phenomenon in which a weak input signal is enhanced by its background fluctuations. SR is observed in many nonlinear systems [20–22]. Particularly, SR in a single neuron has been investigated by numerous researchers both experimentally [23,24] and theoretically [25–31], and it is proposed that the biological sensory system may utilize SR to improve sensitivity to an external input signal. Recently, the effect of SR in spatially extended systems, or neural networks, has been investigated, and some new features have been reported [32–34]. Concerning SR in the coupled FitzHugh-Nagumo equation, we proposed that

the background fluctuations may play a functional role like a parameter of the dynamical system [34].

In the present paper, the associative memory composed of FitzHugh-Nagumo neurons with the fluctuations is treated, and SR-like effects in this system are considered. In Sec. II, a coupled FitzHugh-Nagumo equation and some quantities are defined. In Sec. III, the results of numerical simulations are presented. We consider memory retrieval after adding fluctuations into the system and examine its dependence on the fluctuation intensity. We observe an SR-like phenomenon. The basin of the attraction and the storage capacity of the system are also investigated numerically. In Sec. IV, theoretical analyses for the fluctuation-induced memory retrieval are presented. In Sec. V, the simultaneous retrieval of two patterns is observed as the alternate firings of the particular neurons. Conclusions and discussions are given in the final section.

### II. ASSOCIATIVE MEMORY COMPOSED OF SPIKING NEURONS

In the following, as a model of associative memory, we treat a coupled FitzHugh-Nagumo (FN) equation written as

$$\begin{aligned} \tau \dot{u}_i = & -v_i + u_i - u_i^3/3 + I_i(t) + \eta_i(t) \\ & + \sum_{j=1}^N J_{ij}[u_j(t-d_p) - u_{eq}], \end{aligned} \quad (1)$$

$$\dot{v}_i = u_i - \beta v_i + \gamma, \quad (2)$$

$$\langle \eta_i(t) \eta_j(t') \rangle = D \delta_{ij} \delta(t-t'), \quad (3)$$

where  $\beta=0.8$ ,  $\gamma=0.7$ ,  $\tau=0.1$ ,  $u_{eq}=-1.2$ ,  $d_p=3$ ,  $u_i$  and  $v_i$  denote the internal states of the  $i$ th neuron,  $I_i(t)$  is the external input, and  $\eta_i(t)$  is the Gaussian white noise, which represents the fluctuation in the system. Note that a single FN neuron shows the characteristic of the spiking neuron, namely, it has a stable rest state, and with an appropriate amount of disturbance it generates a pulse with a characteristic magnitude of height and width,  $u_{eq}$  is the equilibrium value of  $u_i$  for  $I_i(t)=0$ ,  $n_i(t)=0$ , and  $J_{ij}=0$  ( $i, j=1, 2, \dots, N$ ), and  $d_p$  is the uniform propagational time delay.

Let us make the above  $N$  neurons store  $p$  random patterns  $\xi_i^\mu$  ( $i=1,2,\dots,N$ ,  $\mu=1,2,\dots,p$ ), generated according to the probability density function

$$P(\xi_i^\mu) = (1-a)\delta(\xi_i^\mu) + a\delta(\xi_i^\mu - 1), \quad (4)$$

where  $\delta(x)$  denotes the delta function and  $a$  ( $0 \leq a \leq 1$ ) is the average of  $\xi_i^\mu$ . Following Yoshioka and Shiino [13], the connection coefficients  $J_{ij}$  are defined as

$$J_{ij} = \frac{w}{Na(1-a)} \sum_{\mu=1}^p \xi_i^\mu (\xi_j^\mu - a), \quad (5)$$

where the parameter  $w$  scales the strength of  $J_{ij}$  and is fixed at  $w=0.15$  in the following. Note that the matrix  $J_{ij} \propto \sum_{\mu} \xi_i^\mu (\xi_j^\mu - a)$  is used instead of the usual  $J_{ij} \propto \sum_{\mu} (\xi_i^\mu - a)(\xi_j^\mu - a)$  so as not to give negative input to the neurons which store 0's, because the FN neuron can fire even with the negative input due to the rebound effect [35].

The external input  $I_i(t)$  is defined as

$$I_i(t) = Ix_i\Theta(t) \quad (x_i \in \{0,1\}), \quad (6)$$

where  $I$  is the strength of the external input,  $x_i$  is the binary factor which determines whether the input is injected to the  $i$ th neuron or not, and  $\Theta(t)$  is Heaviside's step function which takes 1 for  $t \geq 0$  and otherwise takes 0. In the following,  $I$  is fixed at  $I=0.1$ , which is so small that each neuron cannot fire without the fluctuation  $\eta_i(t)$ . Using the binary factor  $x_i$ , the input overlap  $m_{in}^\mu$ , which measures the correlation between the pattern  $\xi^\mu = (\xi_1^\mu, \xi_2^\mu, \dots, \xi_N^\mu)$  and the external input  $I(t) = (I_1(t), I_2(t), \dots, I_N(t))$ , is defined as

$$m_{in}^\mu = \frac{1}{Na(1-a)} \sum_{i=1}^N (\xi_i^\mu - a)(x_i - a). \quad (7)$$

### III. FLUCTUATION-INDUCED MEMORY RETRIEVAL

Following the above configurations, numerical simulations are carried out for  $N=200$ ,  $p=3$ , and  $a=0.5$ . Without loss of generality, the pattern  $\xi^1$  can be defined as

$$\xi_i^1 = \begin{cases} 1, & 1 \leq i \leq 100 \\ 0 & \text{otherwise} \end{cases} \quad (8)$$

and the patterns  $\xi^2$  and  $\xi^3$  are determined randomly following the probability density function (4). The external input is derived by determining the binary factors  $x_i$  randomly so that the input overlap  $m_{in}^1$  with the pattern  $\xi^1$  takes 0.5. A typical time series of  $u_1(t)$  for the fluctuation intensity  $D=0.001$  is shown in Fig. 1, where the fluctuation around  $u_{eq}$  and the two firings are observed. To measure the correlation between the pattern  $\xi^\mu$  and the time series  $u_i(t)$  ( $i=1,2,\dots,N$ ),  $u_i(t)$  is transformed into the binary series  $y_i(t) \in \{0,1\}$ . First, let us define the firing time of the  $i$ th neuron as the time when  $u_i(t)$  exceeds an arbitrary threshold  $\theta$ , and we set  $\theta=0$  in the following. Then the time series  $u_i(t)$  is transformed into the binary series

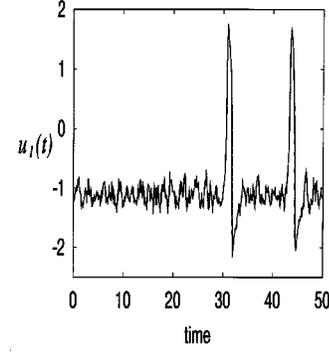


FIG. 1. A typical time series of  $u_1(t)$  for  $N=200$ ,  $p=3$ ,  $a=0.5$ , and  $D=0.001$ . The fluctuation around  $u_{eq}$  and the two firings are observed.

$$y_i(t) = \begin{cases} 1, & t < t_i^f + d \\ 0 & \text{otherwise,} \end{cases} \quad (9)$$

where  $t_i^f$  is the latest firing time of the  $i$ th neuron at time  $t$ , the parameter  $d$  is set close to the characteristic width of the output pulse, and  $d=4$  is used in the following. Then the output overlap  $m_{out}^\mu$  between the pattern  $\xi^\mu$  and the binary series  $y = (y_1(t), y_2(t), \dots, y_N(t))$  is defined as

$$m_{out}^\mu = \frac{1}{Na(1-a)} \sum_{i=1}^N (\xi_i^\mu - a)(y_i - a). \quad (10)$$

The firing times of all the neurons for the fluctuation intensity  $D=0.001$  are shown in Fig. 2(a), and it is observed that all the neurons are firing randomly. The output overlap  $m_{out}^1$  with the pattern  $\xi^1$  obtained from the time series in Fig.

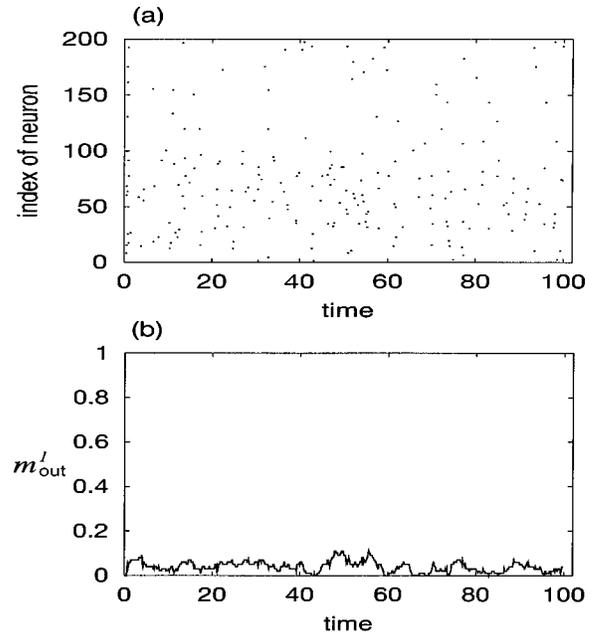


FIG. 2. The result of numerical simulation. (a) The firing times of all the neurons and (b) the output overlap  $m_{out}^1$  with the pattern  $\xi^1$ , for  $N=200$ ,  $p=3$ ,  $a=0.5$ , and  $D=0.001$ . All the neurons are firing randomly, so the retrieval of the pattern  $\xi^1$  fails.

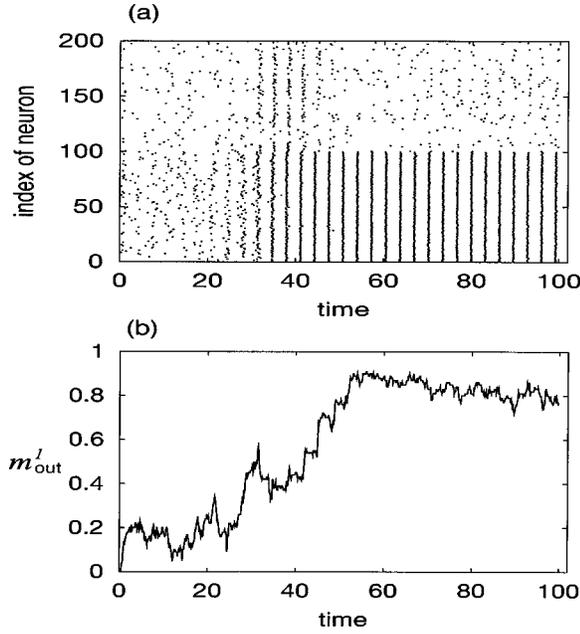


FIG. 3. The result of numerical simulation. (a) The firing times of all the neurons and (b) the output overlap  $m_{\text{out}}^1$  with the pattern  $\xi^1$ , for  $N=200$ ,  $p=3$ ,  $a=0.5$ , and  $D=0.002$ . The retrieval of the pattern  $\xi^1$  is successful.

2(a) is shown in Fig. 2(b). It is observed that  $m_{\text{out}}^1$  fluctuates around 0, so it can be concluded that the retrieval of the pattern  $\xi^1$  fails.

The firing times of all the neurons for  $D=0.002$  are shown in Fig. 3(a). It is observed that all the neurons seem to fire randomly at small  $t$ , but at  $t \sim 40$  the neurons which store 1's for the pattern  $\xi^1$  start to fire periodically and synchronously. And in Fig. 3(b), the output overlap  $m_{\text{out}}^1$  increases to about 0.8 at  $t \sim 40$ , so in this case the retrieval of the pattern  $\xi^1$  is successful.

The results of the simulation for  $D=0.004$  are shown in Fig. 4. The periodic and synchronous firings are observed again, but the neurons which store 0's for pattern  $\xi^1$  also fire with high firing rates due to the large fluctuation intensity, so the output overlap is lower than the case of  $D=0.002$ .

In Fig. 5, the output overlap  $m_{\text{out}}^1$  at a sufficiently large  $t$  is plotted against the fluctuation intensity  $D$  for the input overlap  $m_{\text{in}}^1=0.8, 0.6$ , and  $0.1$ . The other parameters are identical with the previous cases. For  $m_{\text{in}}^1=0.8$  and  $0.6$ , the output overlap  $m_{\text{out}}^1$  increases with the increase of the fluctuation intensity  $D$ , and it decreases with the increase of  $D$  over the optimal intensity  $D_0 \sim 0.0015$ . This phenomenon is similar to so-called stochastic resonance, where a weak input signal is enhanced by its background fluctuation and observed in many nonlinear systems [20–22]. For  $m_{\text{in}}^1=0.1$ , the retrieval of pattern  $\xi^1$  fails for any value of  $D$ .

For the fixed fluctuation intensity  $D=0.002$ , the numerically obtained basin of attraction is shown as a function of the loading rate  $\alpha=p/N$  in Fig. 6. For each loading rate  $\alpha$ , two points are plotted, namely, the upper is the equilibrium value of the output overlap  $m_{\text{out}}^1$  and the lower is the minimum input overlap  $m_{\text{in}}^1$  which gives the successful memory retrieval. For  $\alpha < 0.02$ , the standard deviations shown by the error bars are relatively small, but for  $\alpha \geq 0.02$ , they take

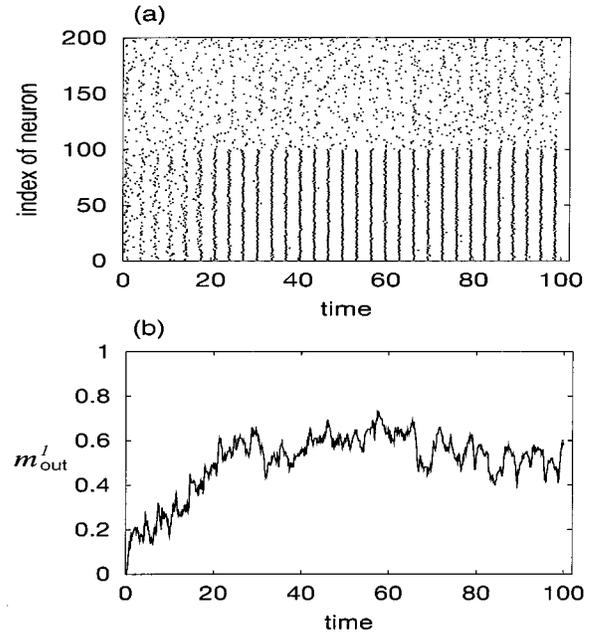


FIG. 4. The result of numerical simulation. (a) The firing times of all the neurons and (b) the output overlap  $m_{\text{out}}^1$  with the pattern  $\xi^1$ , for  $N=200$ ,  $p=3$ ,  $a=0.5$ , and  $D=0.004$ . The neurons which store 0's for pattern  $\xi^1$  fire with high firing rates due to the large fluctuation intensity, so the output overlap is lower than the case of  $D=0.002$ .

larger values, that is, the memory-retrieval states are destabilized. So it can be concluded that the storage capacity  $\alpha_c$  is about 0.02. For further discussions, theoretical analyses of the associative memory [16,17] are needed.

#### IV. THEORETICAL ANALYSIS OF FLUCTUATION-INDUCED MEMORY RETRIEVAL

##### A. Fluctuation-induced memory retrieval

In this section, we give a qualitative explanation for the fluctuation-induced memory retrieval. In the following, the system with  $p=1$  is considered for simplicity. Let us define the set of indices of neurons which store 0's in the pattern  $\xi^\mu = (\xi_1^\mu, \xi_2^\mu, \dots, \xi_N^\mu)$  as  $G^\mu(0)$ , and the set of indices of neurons which store 1's in the pattern  $\xi^\mu$  as  $G^\mu(1)$ . The input  $K_i$  injected into the  $i$ th neuron is written as




FIG. 5. The output overlap  $m_{\text{out}}^1$  against the fluctuation intensity  $D$  for  $m_{\text{in}}^1=0.8, 0.6$ , and  $0.1$  with  $N=200$ ,  $p=3$ , and  $a=0.5$ . Stochastic resonance-like phenomenon is observed for  $m_{\text{in}}^1=0.8$  and  $0.6$ .

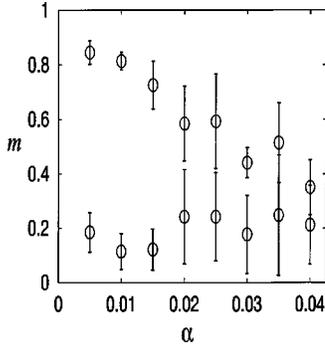


FIG. 6. The basin of attraction for  $N=200$ ,  $D=0.002$ , and  $a=0.5$ . The error bar denotes the standard deviation for ten samples. The storage capacity is estimated to be about 0.02.

$$K_i = \eta_i \quad \text{for } i \in G^1(0), \quad (11)$$

$$K_i = \frac{w}{Na(1-a)} \sum_{j=1}^N (\xi_j^1 - a)(u_j - u_{\text{eq}}) + I + \eta_i, \quad (12)$$

$$= \frac{w}{Na(1-a)} \left( \sum_{j \in G^1(0)} (\xi_j^1 - a)(u_j - u_{\text{eq}}) + \sum_{j \in G^1(1)} (\xi_j^1 - a) \right. \\ \left. \times (u_j - u_{\text{eq}}) \right) + I + \eta_i, \quad (13)$$

$$= w \left( -\frac{1}{N(1-a)} \sum_{j \in G^1(0)} (u_j - u_{\text{eq}}) + \frac{1}{Na} \sum_{j \in G^1(1)} (u_j - u_{\text{eq}}) \right) \\ + I + \eta_i, \quad (14)$$

$$= w(-\langle u_j - u_{\text{eq}} \rangle_{j \in G^1(0)} + \langle u_j - u_{\text{eq}} \rangle_{j \in G^1(1)}) + I + \eta_i \\ \text{for } i \in G^1(1), \quad (15)$$

where  $\langle \rangle_{j \in A}$  denotes the ensemble average over the set  $A$ . Note that the external input  $I(t)$  is injected only to the neurons in  $G^1(1)$  for simplicity. Because noises for different neurons are statistically independent, the neurons in  $G^1(0)$  fire randomly and independently. On the other hand, the neurons in  $G^1(1)$  have the common input  $w\langle u_j - u_{\text{eq}} \rangle_{j \in G^1(1)}$ , so their firings may be correlative with each other. In the following, we treat this dynamics.

Let us consider an ensemble of  $N$  neurons with the uniform coupling term  $w\langle u_j(t-d_p) - u_{\text{eq}} \rangle_j$  and the external input  $I + \eta_i$ , namely, Eqs. (1) and (2) with  $J_{ij} = w/N$  and  $I_i(t) = I$ . Note that this model approximates the dynamics of neurons in  $G^1(1)$ , and that the term  $\langle u_j - u_{\text{eq}} \rangle_{j \in G^1(0)}$  in Eq. (15) is neglected for simplicity. Then let us consider the number of neurons which fire in the narrow time interval  $[t, t + \Delta]$  and denote it by  $Nz_n$ . If an output pulse of the FN neuron has width  $d$  and height  $M$ , the perturbation with width  $\sim d$  and height  $\sim wMz_n$  is injected to all the neurons with the delay  $d_p$ . Let us denote the number of neurons which fire with this perturbation in the time interval  $[t + d_p, t + d_p + \Delta]$  by  $Nz_{n+1}$ , and assume the relation  $z_{n+1} = g(z_n)$ . If the FN neuron acts like a threshold device with the threshold  $I_0$ ,  $g(z_n)$  for noise intensity  $D=0$  is a step function which takes 1 for  $wMz_n + I \geq I_0$  and takes 0 otherwise. It is difficult to

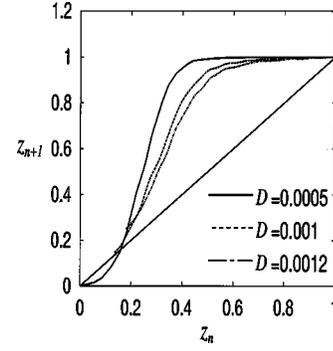


FIG. 7. Numerically obtained  $g(z_n)$  for  $D=0.0005$ ,  $0.001$ , and  $0.0012$  with  $N=100$  and  $I=0.1$ . A saddle-node bifurcation at  $D \sim 0.001$  is observed.

derive  $g(z_n)$  for  $D \neq 0$ , but it is expected to be a monotonically increasing function of  $z_n$ .

Numerically obtained  $g(z_n)$  for  $D=0.0005$ ,  $0.001$ , and  $0.0012$  with  $N=100$  and  $I=0.1$  is plotted in Fig. 7. The width  $\Delta$  of the time interval is set at the same size with  $d$  of the output pulse. It is observed that the number of intersecting points of  $y=g(z)$  with  $y=z$  is three for  $D < D_0 \sim 0.001$  and one for  $D > D_0$ , the intersecting point  $z \sim 1$  is always stable for any  $D$ , and the other intersecting points are generated by a saddle-node bifurcation at  $D = D_0$ . The schematic diagram is shown in Fig. 8. Thus, for  $D > D_0$ , any  $z_n$  converges to the stable fixed point  $z_n \sim 1$ , which means that all the neurons fire synchronously and periodically with the period  $d_p$  for  $D > D_0$ .

## B. The dependence of $m_{\text{out}}$ on $D$

In this section, the dependence of  $m_{\text{out}}$  on  $D$  is investigated for  $D > D_0$ . Assume that the neurons in  $G^1(1)$  fire synchronously and periodically with the period  $d_p$  and that the neurons in  $G^1(0)$  are firing randomly with firing rate depending on  $D$  as  $r_{G0} = r_0 \exp(-C/D)$ , where  $r_0$  and  $C$  are constants. Note that this firing rate is the inverse of the first passage time for a particle in a double-well potential to cross the potential barrier [36], and is introduced only for simplicity.

The distribution of the ratio  $k$  of the neurons in  $G^0(0)$  which fire in a time interval of width  $d$  and its average  $\langle k \rangle$  are written as

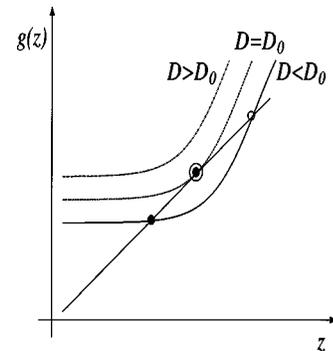


FIG. 8. Schematic diagram of bifurcation of  $g(z)$ .

$$P(k) = N_{(1-a)} C_{N(1-a)k} [1 - \exp(-r_{G0}d)]^{N(1-a)k} \times [\exp(-r_{G0}d)]^{N(1-a)(1-k)}, \quad (16)$$

$$\langle k \rangle = 1 - \exp(-r_{G0}d). \quad (17)$$

With  $\langle k \rangle$ ,  $m_{\text{out}}$  is approximately given by

$$m_{\text{out}}^1 = \frac{1}{Na(1-a)} \sum_i (\xi_i^1 - a)(y_i - a), \quad (18)$$

$$= \frac{1}{Na(1-a)} [(1-a)(1-a)Na + (-a)(1-a)N(1-a)\langle k \rangle + (-a)(-a)N(1-a)(1-\langle k \rangle)], \quad (19)$$

$$= \exp\left[-r_0d \exp\left(-\frac{C}{D}\right)\right]. \quad (20)$$

Note that Eq. (20) decreases monotonically with the increase of  $D$ . This gives the quantitative description of the decrease of  $m_{\text{out}}$  for  $D \geq D_0$ .

## V. ALTERNATE RETRIEVAL OF TWO PATTERNS

In our network, the memory is represented by the synchronized periodic firings of the neurons which store 1's, and this period is determined by the propagational time delay  $d_p$ . So the system has a large degree of freedom along the time axis for the large  $d_p$ , that is, during the time between the firings by one pattern, the system can retrieve other patterns, in other words, this system can process some "tasks" simultaneously.

To see this ability, numerical simulations are performed for  $N=200$ ,  $p=3$ ,  $a=0.5$ , and  $d_p=6.5$ . Note that the propagational time delay  $d_p$  is about twice as long as  $d_p=3$  used in the above sections. For simplicity, the patterns  $\xi^1$  and  $\xi^2$  are defined as

$$\xi_i^1 = \begin{cases} 1, & 1 \leq i \leq 100 \\ 0 & \text{otherwise,} \end{cases} \quad (21)$$

$$\xi_i^2 = \begin{cases} 1, & 51 \leq i \leq 150 \\ 0 & \text{otherwise,} \end{cases} \quad (22)$$

respectively, and the pattern  $\xi^3$  is determined randomly following the probability density function (4). The external input  $I(t)$  is defined so that the binary factor  $x_i$  suffices,

$$x_i = \begin{cases} 1, & 51 \leq i \leq 100 \\ 0 & \text{otherwise.} \end{cases} \quad (23)$$

Note that both input overlaps  $m_{\text{out}}^1$  and  $m_{\text{out}}^2$  take 0.5.

For the fluctuation intensity  $D=0.001$ , the firing times of all the neurons and the output overlaps  $m_{\text{out}}^1$  and  $m_{\text{out}}^2$  are plotted in Figs. 9(a) and 9(b), respectively. It is observed that the retrievals of both pattern  $\xi^1$  and pattern  $\xi^2$  fail with this fluctuation intensity.

The firing times of all the neurons for the fluctuation intensity  $D=0.002$  are plotted in Fig. 10(a). It is shown that the two patterns  $\xi^1$  and  $\xi^2$  are retrieved alternatively, accom-

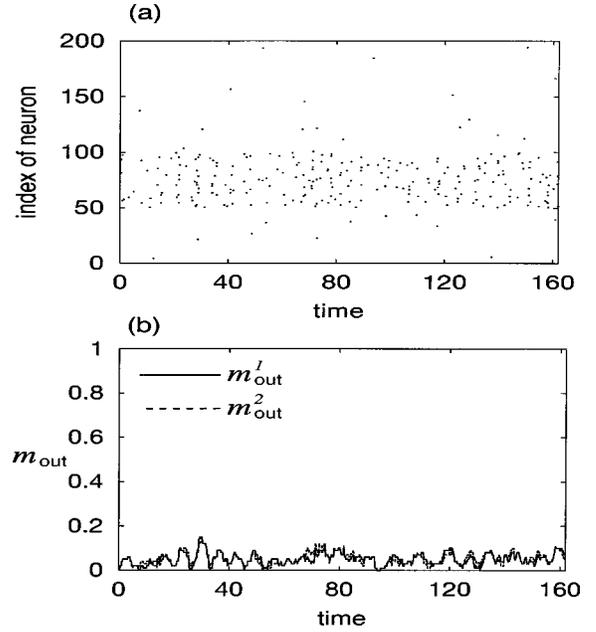


FIG. 9. The results of numerical simulation. (a) The firing times and (b) the output overlaps, for  $N=200$ ,  $p=3$ ,  $a=0.5$ ,  $D=0.001$ , and  $d_p=6.5$ . The retrievals of both pattern  $\xi^1$  and pattern  $\xi^2$  fail.

panied by the time difference  $d_p/2$ . The output overlaps  $m_{\text{out}}^1$  and  $m_{\text{out}}^2$  derived from the data in Fig. 10(a) are shown in Fig. 10(b). The alternate retrieval of two patterns is observed as the antiphase oscillations of two output overlaps.

The results of the numerical simulation for  $D=0.004$  are shown in Fig. 11. In Fig. 11(a), it is observed that all the neurons are firing with high firing rates, so the retrievals of both pattern  $\xi^1$  and pattern  $\xi^2$  fail as in Fig. 11(b).

From the above results, it can be concluded that our system has an ability to retrieve two patterns simultaneously as

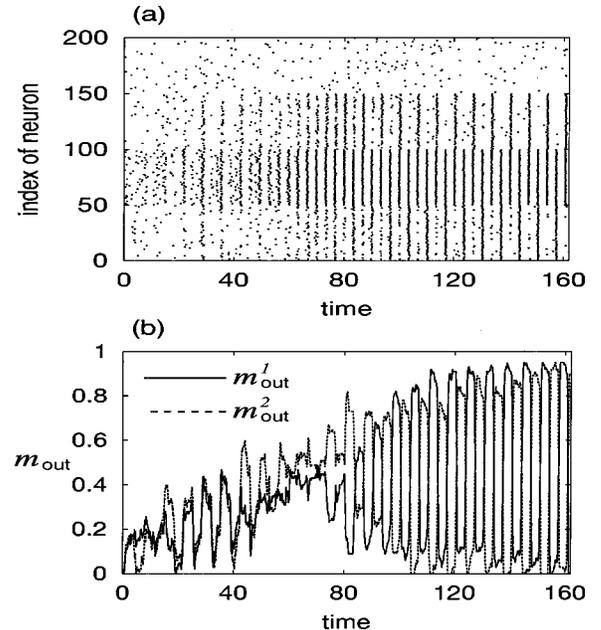


FIG. 10. The results of numerical simulation. (a) The firing times and (b) the output overlaps, for  $N=200$ ,  $p=3$ ,  $a=0.5$ ,  $D=0.002$ , and  $d_p=6.5$ . The alternate retrieval of two patterns is observed as the antiphase oscillations of two output overlaps.

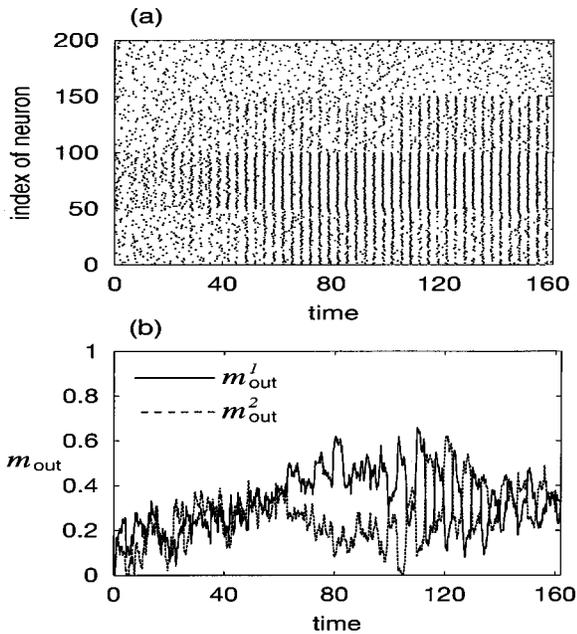


FIG. 11. The results of numerical simulation. (a) The firing times and (b) the output overlaps, for  $N=200$ ,  $p=3$ ,  $a=0.5$ ,  $D=0.004$ , and  $d_p=6.5$ . All the neurons are firing with high firing rates, so the retrievals of both pattern  $\xi^1$  and pattern  $\xi^2$  fail.

the alternate firings of particular neurons, and the fluctuation intensity  $D$  plays a significant role to realize this dynamics.

## VI. CONCLUSIONS AND DISCUSSION

The associative memory in a pulsed neural network composed of FitzHugh-Nagumo neurons with propagational time delay is investigated. In this network, the memory is represented by the synchronous periodic firings of the particular neurons. It is found that the memory retrieval in this system is achieved by adding fluctuations, and there exists an optimal fluctuation intensity for memory retrieval. This phenom-

enon is similar to so-called stochastic resonance (SR), where the weak input signal is enhanced by its background fluctuations. Though there is no time-dependent input in our model, the mechanism of associative memory is driven and enhanced by its background fluctuations. The basin of attraction of this system is investigated numerically, and its storage capacity is found to be  $\alpha_c \sim 0.02$ . Note that this storage capacity is smaller than those of previous models, for example 0.138 for the Hopfield model [37] and 0.038 for the coupled phase oscillators [38]. But our network has an ability that the previous models do not have, that is, an ability to retrieve two patterns as the alternate firings of the particular neurons. While such dynamics utilizing the degree of freedom along the time axis is proposed by Wang *et al.* for the network of bursting neurons [14], our model has the properties that the component of memory is the single pulse of each neuron, and that fluctuation in the system is indispensable.

As for the fluctuations in the neural system, SR in a single neuron is often investigated, and it is proposed that the sensory system may utilize SR in order to improve the sensitivity to the external input. Our results show that fluctuations can play a more functional role in higher-order dynamics in the brain, such as memory retrieval in the associative memory. Collins *et al.* propose that regulation of the fluctuation intensity is not required for a network of large numbers of neurons [33]. In our dynamics, however, regulation of the fluctuation intensity is required for optimal intensity (see Fig. 5). It might be difficult to regulate the fluctuation intensity if the fluctuation in our model is considered to be the thermal noise in the neural system, but that might be naturally performed if the fluctuation in our system represents the sum of enormous pulses from the presynaptic neurons [29–31]. In such a case, the dynamics of the system might be controlled by its background fluctuations [34].

## ACKNOWLEDGMENT

The author (T.K.) is grateful to Professor T. Horita for his stimulating discussions and encouragement.

- 
- [1] I. Tsuda, *Neural Networks* **5**, 313 (1992).
  - [2] M. Adachi and K. Aihara, *Neural Networks* **10**, 83 (1997).
  - [3] T. Aoyagi, *Phys. Rev. Lett.* **74**, 4075 (1995).
  - [4] T. Aoyagi and K. Kitano, *Phys. Rev. E* **55**, 7424 (1997).
  - [5] K. Kitano and T. Aoyagi, *Phys. Rev. E* **57**, 5914 (1998).
  - [6] T. Aonishi, K. Kurata, and M. Okada, *Phys. Rev. Lett.* **82**, 2800 (1999).
  - [7] F. C. Hoppensteadt and E. M. Izhikevich, *Phys. Rev. Lett.* **82**, 2983 (1999).
  - [8] T. Aoyagi and M. Nomura, *Phys. Rev. Lett.* **83**, 1062 (1999).
  - [9] M. Yamana, M. Shiino, and M. Yoshioka, *J. Phys. A* **32**, 3525 (1999).
  - [10] S. Uchiyama and H. Fujisaka, *J. Phys. A* **32**, 4623 (1999).
  - [11] W. Gerstner, R. Ritz, and J. L. van Hemmen, *Biol. Cybern.* **69**, 503 (1993).
  - [12] W. Maass and T. Natschläger, *Network* **8**, 355 (1997).
  - [13] M. Yoshioka and M. Shiino, *Phys. Rev. E* **58**, 3628 (1998).
  - [14] D. Wang, J. Buhmann, and C. von der Malsburg, *Neural Comput.* **2**, 94 (1990).
  - [15] H. Fujii, H. Ito, K. Aihara, N. Ichinose, and M. Tsukada, *Neural Networks* **9**, 1303 (1996).
  - [16] S. Amari and K. Maginu, *Neural Networks* **1**, 63 (1988).
  - [17] M. Shiino and T. Fukai, *J. Phys. A* **25**, L375 (1992).
  - [18] Z. F. Mainen and T. J. Sejnowski, *Science* **268**, 1503 (1995).
  - [19] R. R. de Ruyter van Steveninck, G. D. Lewen, S. P. Strong, R. Koberle, and W. Bialek, *Science* **275**, 1805 (1997).
  - [20] M. I. Dykman, D. G. Luchinsky, R. Mannella, P. V. E. McClintock, N. D. Stein, and N. G. Stocks, *Nuovo Cimento D* **17**, 661 (1995).
  - [21] L. Gamaitoni, P. Hänggi, P. Jung, and F. Marchesoni, *Rev. Mod. Phys.* **70**, 223 (1998).
  - [22] K. Wiesenfeld and F. Jaramillo, *Chaos* **8**, 539 (1998).
  - [23] J. K. Douglass, L. Wilkens, E. Pantazelou, and F. Moss, *Nature (London)* **365**, 337 (1993).
  - [24] X. Pei, L. A. Wilkens, and F. Moss, *J. Neurophysiol.* **76**, 3002 (1996).
  - [25] A. Longtin, *J. Stat. Phys.* **70**, 309 (1993).
  - [26] K. Wiesenfeld, D. Pierson, E. Pantazelou, C. Dames, and F.

- Moss, Phys. Rev. Lett. **72**, 2125 (1994).
- [27] A. R. Bulsara, T. C. Elston, C. R. Doering, S. B. Lowen, and K. Lindenberg, Phys. Rev. E **53**, 3958 (1996).
- [28] T. Shimokawa, K. Pakdaman, and S. Sato, Phys. Rev. E **59**, 3427 (1999).
- [29] G. Mato, Phys. Rev. E **58**, 876 (1998).
- [30] G. Mato, Phys. Rev. E **59**, 3339 (1999).
- [31] Y. Sakumura and K. Aihara, in *Proceedings of the Fifth International Conference on Neural Information Processing*, edited by S. Usui and T. Omori (Ohmsha, Tokyo, 1998), p. 951.
- [32] F. Moss and X. Pei, Nature (London) **376**, 211 (1995).
- [33] J. J. Collins, C. C. Chow, and T. T. Imhoff, Nature (London) **376**, 236 (1995).
- [34] T. Kanamaru, T. Horita, and Y. Okabe, Phys. Lett. A **255**, 23 (1999).
- [35] J. D. Enderle and E. J. Engelken, Biomed. Sci. Instrum. **31**, 53 (1995).
- [36] C. W. Gardiner, *Handbook of Stochastic Methods* (Springer-Verlag, Berlin, 1985).
- [37] D. J. Amit, H. Gutfreund, and H. Sompolinsky, Phys. Rev. Lett. **55**, 1530 (1985).
- [38] J. Cook, J. Phys. A **22**, 2057 (1989).