

# MATLAB<sup>®</sup>

## The Language of Technical Computing

- Computation
- Visualization
- Programming

Desktop Tools and Development  
Environment  
*Version 7*



## How to Contact The MathWorks:



www.mathworks.com      Web  
comp.soft-sys.matlab      Newsgroup



support@mathworks.com      Technical support  
suggest@mathworks.com      Product enhancement suggestions  
bugs@mathworks.com      Bug reports  
doc@mathworks.com      Documentation error reports  
service@mathworks.com      Order status, license renewals, passcodes  
info@mathworks.com      Sales, pricing, and general information



508-647-7000      Phone



508-647-7001      Fax



The MathWorks, Inc.      Mail  
3 Apple Hill Drive  
Natick, MA 01760-2098

For contact information about worldwide offices, see the MathWorks Web site.

### *MATLAB Desktop Tools and Development Environment*

© COPYRIGHT 1984 - 2004 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

**FEDERAL ACQUISITION:** This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

MATLAB, Simulink, Stateflow, Handle Graphics, and Real-Time Workshop are registered trademarks, and TargetBox is a trademark of The MathWorks, Inc.

Other product or brand names are trademarks or registered trademarks of their respective holders.

Printing History: June 2004      First printing      New for MATLAB 7.0 (Release 14).  
Formerly part of *Using MATLAB*.

## Startup and Shutdown

### 1

<b>Starting MATLAB</b> .....	1-2
Starting MATLAB on Windows Platforms .....	1-2
Starting MATLAB on UNIX Platforms .....	1-3
Startup Directory for MATLAB .....	1-3
Startup Options .....	1-4
Toolbox Path Caching in MATLAB .....	1-10
<b>Quitting MATLAB</b> .....	1-13
Running a Script When Quitting MATLAB .....	1-13

## Desktop

### 2

<b>Overview of the Desktop</b> .....	2-2
Example of Desktop—Default Layout .....	2-3
Summary of Desktop Tools .....	2-4
<b>Arranging the Desktop—Overview</b> .....	2-5
Opening and Arranging Tools .....	2-6
Opening and Arranging Documents .....	2-7
Examples of Desktop Arrangements .....	2-11
Saving Desktop Layouts .....	2-18
<b>Common Desktop Features</b> .....	2-19
Start Button for Accessing Tools .....	2-19
Shortcuts for MATLAB—Easily Run a Group of Statements ..	2-21
Web Browser .....	2-29
Menus and Context Menus .....	2-31
Toolbars .....	2-32
Status Bar .....	2-34
Sizing, Arranging, and Sorting Columns in Tools .....	2-34

Keyboard Shortcuts .....	2-35
Selecting Multiple Items .....	2-38
Cut, Copy, and Paste .....	2-39
Page Setup Options for Printing .....	2-40
Accessing The MathWorks on the Web .....	2-42
<b>Fonts, Colors, and Other Preferences .....</b>	<b>2-44</b>
Fonts Preferences for Desktop Tools .....	2-44
Colors Preferences for Desktop Tools .....	2-50
General Preferences for MATLAB .....	2-54
About Preferences .....	2-56

## Running Functions—Command Window and History

# 3

<b>Opening the Command Window .....</b>	<b>3-2</b>
<b>Running Functions and Programs, and Entering Variables 3-3</b>	
Running Statements at the Command Line Prompt .....	3-3
Running External Programs .....	3-6
Evaluating or Opening a Selection .....	3-6
Hyperlinks for Running Functions .....	3-7
<b>Controlling Input .....</b>	<b>3-8</b>
Case and Space Sensitivity .....	3-8
Syntax Highlighting .....	3-9
Cut, Copy, Paste, and Undo Features .....	3-10
Enter Multiple Lines Without Running Them .....	3-10
Entering Multiple Functions in a Line .....	3-11
Entering Long Statements .....	3-11
Recalling Previous Lines .....	3-12
Tab Completion .....	3-12
Keyboard Shortcuts in the Command Window .....	3-16
Navigating Above the Command Line .....	3-17

<b>Controlling Output</b> .....	<b>3-18</b>
Suppressing Output .....	<b>3-18</b>
Paging of Output in the Command Window .....	<b>3-18</b>
Formatting and Spacing Numeric Output .....	<b>3-19</b>
Clearing the Command Window .....	<b>3-20</b>
Printing Command Window Contents .....	<b>3-20</b>
Keeping a Session Log .....	<b>3-21</b>
<b>Searching in the Command Window</b> .....	<b>3-22</b>
Find Dialog .....	<b>3-22</b>
Incremental Search .....	<b>3-23</b>
<b>Preferences for the Command Window</b> .....	<b>3-27</b>
Format, Display, and Accessibility Preferences .....	<b>3-27</b>
Keyboard and Indenting Preferences for the Command Window .....	<b>3-29</b>
<b>Command History</b> .....	<b>3-30</b>
Viewing Statements in the Command History Window .....	<b>3-31</b>
Using Statements from the Command History .....	<b>3-32</b>
Searching in the Command History .....	<b>3-33</b>
Printing the Command History .....	<b>3-35</b>
Deleting Entries in the Command History Window .....	<b>3-35</b>
<b>Preferences for Command History</b> .....	<b>3-37</b>
Settings .....	<b>3-37</b>
Saving .....	<b>3-37</b>

## Help for Using MATLAB

---

# 4

<b>Types of Documentation</b> .....	<b>4-2</b>
Accessing Documentation on the Web .....	<b>4-3</b>
<b>Help Browser</b> .....	<b>4-4</b>
Resizing the Help Browser .....	<b>4-5</b>
Adding Your Own Help Files to the Help Browser .....	<b>4-6</b>

<b>Find Information with the Help Browser</b> .....	<b>4-7</b>
Contents Listing in the Help Browser .....	4-7
Index for Help Browser .....	4-10
Search Documentation with the Help Browser .....	4-12
Favorites .....	4-18
<b>View Documentation in the Help Browser</b> .....	<b>4-19</b>
Browse to Other Pages .....	4-20
Links .....	4-21
Find Text in Displayed Pages .....	4-21
Copy Information .....	4-22
Evaluate a Selection .....	4-22
View the Page Source (HTML) .....	4-22
<b>Demos in the Help Browser</b> .....	<b>4-23</b>
Using Demos .....	4-23
Adding Your Own Demos .....	4-26
<b>Preferences for the Help Browser</b> .....	<b>4-27</b>
Product Filter .....	4-27
PDF Reader—Specifying Its Location .....	4-28
General—Keep Contents Synchronized .....	4-28
Help Fonts Preferences—Specifying Font Name, Style, and Size .....	4-29
<b>Printed Documentation</b> .....	<b>4-30</b>
Printing a Page from the Help Browser .....	4-30
Printing the PDF Version of Documentation .....	4-30
<b>Help Functions</b> .....	<b>4-32</b>
View Function Reference Pages—the doc Function .....	4-33
Getting Help in the Command Window—the help Function ..	4-34
<b>Other Forms of Help</b> .....	<b>4-37</b>
Documentation for Other Products .....	4-37
Product-Specific Help Features .....	4-37
User-Contributed M-Files .....	4-38
Technical Support .....	4-38
Newsgroup for MathWorks Products .....	4-39

Other Resources for MATLAB Information .....	4-39
Version and License Information .....	4-40
Provide Feedback .....	4-40

## Workspace, Search Path, and File Operations

# 5

<b>MATLAB Workspace</b> .....	5-2
Opening the Workspace Browser .....	5-3
Viewing and Editing Values in the Current Workspace .....	5-3
Saving the Current Workspace .....	5-4
Loading a Saved Workspace and Importing Data .....	5-6
Changing and Copying Variable Names .....	5-7
Clearing Workspace Variables .....	5-7
Viewing Base and Function Workspaces Using the Stack ...	5-8
Creating Graphics from the Workspace Browser .....	5-8
Opening Variables and Objects for Viewing and Editing ...	5-8
Preferences for the Workspace Browser .....	5-9
<b>Viewing and Editing Workspace Variables with the</b>	
<b>Array Editor</b> .....	5-10
Opening the Array Editor .....	5-10
Navigating in the Array Editor .....	5-12
Changing Array Size, Content, and Format of Elements in	
the Array Editor .....	5-12
Cut, Copy, Paste, and Delete in the Array Editor .....	5-13
Exchanging Data with the Command Window .....	5-16
Exchanging Data with Excel .....	5-16
Creating Graphs and Variables from the Current Selection ..	5-16
Preferences for the Array Editor .....	5-16
<b>Search Path</b> .....	5-18
About the Search Path .....	5-18
How the Search Path Determines Which Function to Use ...	5-19
How MATLAB Finds the Search Path, pathdef.m .....	5-20
Viewing and Setting the Search Path .....	5-20
Using the Path in Future Sessions .....	5-26
Recovering from Problems with the Search Path .....	5-27

<b>File Management Operations</b> .....	<b>5-29</b>
Current Directory Field .....	<b>5-30</b>
Current Directory Browser .....	<b>5-30</b>
Viewing and Making Changes to Directories .....	<b>5-32</b>
Creating, Renaming, Copying, and Removing Directories and Files .....	<b>5-33</b>
Opening, Running, and Viewing the Content of Files .....	<b>5-37</b>
Finding Files and Content Within Files .....	<b>5-40</b>
Accessing Source Control Features .....	<b>5-42</b>
Preferences for the Current Directory Browser .....	<b>5-42</b>

## Editing and Debugging M-Files

# 6

<b>Begin with Existing Code</b> .....	<b>6-2</b>
Create M-Files from Command Window and History .....	<b>6-2</b>
Use Existing M-Files and Examples .....	<b>6-2</b>
 <b>Ways to Edit and Debug Files</b> .....	 <b>6-4</b>
 <b>Starting, Customizing, and Closing the Editor/Debugger</b> ..	 <b>6-6</b>
Creating a New File in the Editor/Debugger .....	<b>6-7</b>
Opening Existing Files in the Editor/Debugger .....	<b>6-8</b>
Opening the Editor Without Starting MATLAB .....	<b>6-10</b>
Arranging Editor/Debugger Documents .....	<b>6-10</b>
Preferences for the Editor/Debugger .....	<b>6-11</b>
Working with Other Text File Types .....	<b>6-12</b>
Closing the Editor/Debugger .....	<b>6-12</b>
 <b>Creating, Editing, and Running Files</b> .....	 <b>6-13</b>
Entering Statements .....	<b>6-13</b>
Appearance of an M-File .....	<b>6-19</b>
Navigating in an M-File .....	<b>6-21</b>
Finding Text in Files .....	<b>6-23</b>
Opening a Selection in an M-File .....	<b>6-28</b>
Saving M-Files .....	<b>6-29</b>
Running M-Files from the Editor/Debugger .....	<b>6-31</b>



Printing M-Files .....	6-32
Closing M-Files .....	6-32
<b>Debugging M-Files .....</b>	<b>6-33</b>
Finding Errors in M-Files .....	6-33
Debugging Example—The Collatz Problem .....	6-36
Debugging Process and Features .....	6-39
Preparing for Debugging .....	6-39
Setting Breakpoints .....	6-40
Running an M-File with Breakpoints .....	6-43
Stepping Through an M-File .....	6-45
Examining Values .....	6-46
Correcting Problems and Ending Debugging .....	6-51
Conditional Breakpoints .....	6-58
Error Breakpoints .....	6-60
<b>Rapid Code Iteration Using Cells .....</b>	<b>6-63</b>
Defining Cells .....	6-64
Navigating and Evaluating with Cells .....	6-69
Using Cells in Function M-Files .....	6-73

## Tuning and Managing M-Files

# 7

<b>Visual Directory in Current Directory Browser .....</b>	<b>7-2</b>
Navigate Directory Hierarchy .....	7-4
View and Edit Files .....	7-5
Sort by Contents.m .....	7-6
Run, Make Thumbnail, Delete File (Show Actions) .....	7-7
Show File Sizes .....	7-9
Show Function/Script .....	7-9
<b>Directory Reports in Current Directory Browser .....</b>	<b>7-11</b>
Accessing and Using Directory Reports .....	7-11
TODO/FIXME Report .....	7-12
Help Report .....	7-13
Contents Report .....	7-17

Dependency Report .....	7-20
File Comparison Report .....	7-22
Coverage Report .....	7-24
<b>M-Lint Code Check Report .....</b>	<b>7-25</b>
Accessing M-Lint .....	7-25
M-Lint Graphical User Interface (GUI) .....	7-25
Making Changes Based on M-Lint Messages .....	7-28
<b>Profiling for Improving Performance .....</b>	<b>7-35</b>
What Is Profiling? .....	7-35
The Profiling Process: Guidelines .....	7-36
The Profiler .....	7-38
Profile Summary Report .....	7-42
Profile Detail Report .....	7-45
The profile Function .....	7-51

## Publishing Results

# 8

<b>Publishing to HTML, XML, LaTeX, Word, and PowerPoint</b>	
<b>Using Cells .....</b>	<b>8-2</b>
Overview of Publishing .....	8-2
Example of Publishing Without Text Markup .....	8-3
Example of Publishing with Text Markup .....	8-4
<b>Marking Up Text in Cells for Publishing .....</b>	<b>8-9</b>
<b>Publishing M-Files Using Cells .....</b>	<b>8-15</b>
How to Publish an M-File .....	8-15
About Published M-Files .....	8-16
Modifying Published Output Via Preferences .....	8-17

<b>Notebook for Publishing to Word</b> .....	<b>8-18</b>
Creating an M-Book .....	<b>8-18</b>
Entering MATLAB Commands in an M-Book .....	<b>8-21</b>
Protecting the Integrity of Your Workspace in M-Books .....	<b>8-22</b>
Ensuring Data Consistency in M-Books .....	<b>8-22</b>
Debugging and Notebook .....	<b>8-22</b>
<b>Defining MATLAB Commands as Input Cells for Notebook</b> .....	<b>8-23</b>
Defining Cell Groups for Notebook .....	<b>8-23</b>
Defining Autoinit Input Cells for Notebook .....	<b>8-25</b>
Defining Calc Zones for Notebook .....	<b>8-25</b>
Converting an Input Cell to Text with Notebook .....	<b>8-26</b>
<b>Evaluating MATLAB Commands with Notebook</b> .....	<b>8-27</b>
Evaluating Cell Groups with Notebook .....	<b>8-28</b>
Evaluating a Range of Input Cells with Notebook .....	<b>8-29</b>
Evaluating a Calc Zone with Notebook .....	<b>8-30</b>
Evaluating an Entire M-Book .....	<b>8-30</b>
Using a Loop to Evaluate Input Cells Repeatedly with Notebook .....	<b>8-31</b>
Converting Output Cells to Text with Notebook .....	<b>8-32</b>
Deleting Output Cells with Notebook .....	<b>8-32</b>
<b>Printing and Formatting an M-Book</b> .....	<b>8-33</b>
Printing an M-Book .....	<b>8-33</b>
Modifying Styles in the M-Book Template .....	<b>8-33</b>
Choosing Loose or Compact Format for Notebook .....	<b>8-34</b>
Controlling Numeric Output Format for Notebook .....	<b>8-35</b>
Controlling Graphic Output for Notebook .....	<b>8-35</b>
<b>Configuring Notebook</b> .....	<b>8-39</b>
<b>Notebook Feature Reference</b> .....	<b>8-41</b>

**Source Control Interface on PC Platforms . . . . . 9-2**  
    Selecting and Viewing the Source Control System . . . . . 9-3  
    Adding Files to the Source Control System . . . . . 9-4  
    Checking Files Out of the Source Control System . . . . . 9-8  
    Checking Files Into the Source Control System . . . . . 9-11  
    Getting the Latest Version of Files from the Source  
    Control System . . . . . 9-15  
    Undoing the Check-Out . . . . . 9-18  
    Removing Files from the Source Control System . . . . . 9-19  
    Showing File History . . . . . 9-20  
    Comparing the Working Copy of a File to the Latest  
    Version in Source Control . . . . . 9-22  
    Displaying Source Control Properties of a File . . . . . 9-24  
    Starting the Source Control System Client . . . . . 9-26

**Source Control Interface on UNIX Platforms . . . . . 9-27**  
    Selecting and Viewing the Source Control System . . . . . 9-27  
    Checking Files Into the Source Control System . . . . . 9-29  
    Checking Files Out of the Source Control System . . . . . 9-31  
    Undoing the Check-Out . . . . . 9-32

# Startup and Shutdown

---

Starting MATLAB (p. 1-2)	General information about starting a MATLAB® session.
Starting MATLAB on Windows Platforms (p. 1-2)	Start MATLAB on Windows. Includes troubleshooting tips.
Starting MATLAB on UNIX Platforms (p. 1-3)	Start MATLAB on UNIX. Includes troubleshooting tips.
Startup Directory for MATLAB (p. 1-3)	View and change the startup directory for different platforms.
Startup Options (p. 1-4)	Instruct MATLAB to perform specified operations upon startup, including using a <code>startup.m</code> file.
Toolbox Path Caching in MATLAB (p. 1-10)	Reduce startup time if you run MATLAB from a network server.
Quitting MATLAB (p. 1-13)	End a MATLAB session. Instruct MATLAB to perform specified operations upon shutdown.

## Starting MATLAB

Instructions for starting MATLAB depend on your platform. For a list of supported platforms, see the system requirements in the installation documentation, or the Products section of the MathWorks Web site, <http://www.mathworks.com>.

- “Starting MATLAB on Windows Platforms” on page 1-2
- “Starting MATLAB on UNIX Platforms” on page 1-3
- “Startup Directory for MATLAB” on page 1-3
- “Startup Options” on page 1-4
- “Toolbox Path Caching in MATLAB” on page 1-10

### Starting MATLAB on Windows Platforms

To start MATLAB on a Microsoft Windows platform, select the **Start -> Programs -> MATLAB 7.0 -> MATLAB 7.0**, or double-click the MATLAB shortcut icon on your Windows desktop. The shortcut was automatically created by the installer.



If you start MATLAB from a DOS window, type `matlab` at the DOS prompt.

After starting MATLAB, the MATLAB desktop opens—see Chapter 2, “Desktop.” All of the desktop components that were open when you last shut down MATLAB will be opened on startup.

---

**Note** If you use a virus scanner, your settings may slow down MATLAB startup. To troubleshoot other startup problems, see the Technical Support Web page for MATLAB Startup Solutions on the MathWorks Web site, <http://www.mathworks.com/support/product/ML/solution/startup/page1.shtml>.

---

## Starting MATLAB on UNIX Platforms

To start MATLAB on a UNIX platform, type `matlab` at the operating system prompt.

After starting MATLAB, the MATLAB desktop opens—see Chapter 2, “Desktop.” On UNIX platforms, if the `DISPLAY` environment variable is not set or is invalid, the desktop will not display. To troubleshoot other startup problems, see the Technical Support Web page for MATLAB Startup Solutions on the MathWorks Web site,

<http://www.mathworks.com/support/product/ML/solution/startup/page1.shtml>.

## Startup Directory for MATLAB

The startup directory is the current directory in MATLAB when it first starts, and depends on your platform and installation. You can specify a different startup directory.

### Startup Directory on Windows Platforms

On Windows platforms, when you installed MATLAB, the default startup directory was set to `$matlabroot/work`, where `$matlabroot` is the directory where MATLAB files are installed.

### Startup Directory on UNIX Platforms

On UNIX platforms, the initial current directory is the directory you are in on your UNIX file system when you start MATLAB.

## Changing the Startup Directory

You can start MATLAB in a different directory from the default. The directory you specify will be the current working directory when MATLAB starts.

**For Windows Platforms Only.** To change the startup directory on Windows platforms:

- 1 Right-click the MATLAB shortcut icon and select **Properties** from the context menu.

The **Properties** dialog box for `matlab.exe` opens to the **Shortcut** page.

- 2** Enter the new startup directory in the **Start in** field and click **OK**.

The next time you start MATLAB using that shortcut icon, the current directory will be the one you specified in step 2.

You can make multiple shortcuts to start MATLAB, each with its own startup directory, and with each startup directory having different startup options.

**For All Platforms.** To change the startup directory:

- 1** Create a `startup.m` file—see “Using the Startup File for MATLAB, `startup.m`” on page 1-4.
- 2** In the `startup.m` file, include the `cd` function to change to the new directory.
- 3** Put the `startup.m` file in the current startup directory.

## Startup Options

You can define startup options for MATLAB that instruct MATLAB to perform certain operations when you start it. There are two ways to specify startup options for MATLAB:

- “Using the Startup File for MATLAB, `startup.m`” on page 1-4
- “Adding Startup Options for Windows Platforms” on page 1-5 or “Adding Startup Options for UNIX Platforms” on page 1-8

### Using the Startup File for MATLAB, `startup.m`

At startup, MATLAB automatically executes the master M-file `matlabrc.m` and, if it exists, `startup.m`. The file `matlabrc.m`, which is in the local directory, is reserved for use by The MathWorks, and by the system manager on multiuser systems.

The file `startup.m` is for you to specify startup options. For example, you can modify the default search path, predefine variables in your workspace, or define Handle Graphics® defaults. Creating a `startup.m` file with the line

```
addpath /home/me/mytools
cd /home/me/mytools
```

adds `/home/me/mytools` to your default search path and makes `mytools` the current directory upon startup.



**Location of startup.m.** Place the `startup.m` file in the current startup directory, which is where MATLAB first looks for it. For more information, see “Startup Directory for MATLAB” on page 1-3. You can instead place it in `$matlabroot/toolbox/local`, which is the next place MATLAB looks for `startup.m`, where `$matlabroot` is the directory in which MATLAB is installed.

## Adding Startup Options for Windows Platforms

You can add selected startup options (also called command flags or command line switches) to the target path for your Windows shortcut for MATLAB. To do so:

- 1 Right-click the MATLAB shortcut icon



and select **Properties** from the context menu. The **Properties** dialog box for `matlab.exe` opens to the **Shortcut** panel.

- 2 In the **Target** field, after the target path for `matlab.exe`, add `/r results` to the end of the file path. This instructs MATLAB to run the results file automatically after startup. The statement in the **Target** field might appear as

```
H:\Programs\matlab.exe /r results
```

**3** Click **OK**.

The following table contains the available MATLAB startup options.

<b>Option</b>	<b>Description</b>
<b>/automation</b>	Start MATLAB as an automation server, minimized and without the MATLAB splash screen. For more information, see “COM and DDE Support” in the External Interfaces documentation.
<b>/c licensefile</b>	Set LM_LICENSE_FILE to licensefile. It can have the form port@host.
<b>/logfile logfile</b> logfile	Automatically write output from MATLAB to the specified log file.
<b>/nosplash</b>	Start MATLAB without displaying the MATLAB splash screen.
<b>/r MATLAB_command</b>	Automatically run the specified MATLAB command or M-file immediately after MATLAB starts. This is also referred to as calling MATLAB in batch mode. Separate multiple commands with commas or semicolons (;). See also “Notes About Startup Options” on page 1-7.
<b>/regserver</b>	Modify the Windows registry with the appropriate COM entries for MATLAB. For more information, see “COM and DDE Support” in the External Interfaces documentation.
<b>/unregserver</b>	Modify the Windows registry to remove the COM entries for MATLAB. Use this option to reset the registry. For more information, see “COM and DDE Support” in the External Interfaces documentation.

**Notes About Startup Options.**

- You can use a hyphen (-) instead of a slash (/), for example, -nosplash.
- When automatically running M-files or commands at startup with the /r option, all M-files or commands used must be on the MATLAB path or in the MATLAB startup directory. For example

```
... matlab /r myownfile
```

runs myownfile, where myownfile is in the MATLAB startup directory. Use only the filename, not the file extension or pathname. For example, MATLAB produces an error when you run

```
... matlab /r C:\results.m.
```

- You can also enter MATLAB startup options with a DOS command by including the commands in quotation marks. For example, in the DOS window, run

```
matlab /r "hf=figure;peaks;print(hf);exit"
```

When MATLAB starts, it automatically creates a figure, runs peaks, prints the figure, and exits.

## Adding Startup Options for UNIX Platforms

Include startup options (also called command flags or command line switches) after the `matlab` startup command.

For example, to start MATLAB without the splash screen, type

```
matlab -nosplash
```

For more details, see the `matlab` reference page.

Option	Description
<code>-arch</code>	Run MATLAB assuming architecture <code>arch</code> .
<code>-arch/ext</code>	Run the version of MATLAB with the extension <code>ext</code> , if it exists, assuming architecture <code>arch</code> .
<code>-c licensefile</code>	Set <code>LM_LICENSE_FILE</code> to <code>licensefile</code> . It can have the form <code>port@host</code> .
<code>-check_malloc</code>	Set the <code>MATLAB_MEM_MGR</code> environment variable to <code>debug</code> . This starts MATLAB memory integrity checking.
<code>-Ddebugger [options]</code>	Start MATLAB with the specified debugger.
<code>-debug</code>	Turn on MATLAB internal debugging.
<code>-display Xserver</code>	Send X commands to Xserver.
<code>-ext</code>	Run the version of MATLAB with the extension <code>ext</code> , if it exists.
<code>-h</code> or <code>-help</code>	Display startup options (without starting MATLAB).
<code>-logfile log</code>	Automatically write output from MATLAB to the specified log file.
<code>-mwvisual visualid</code>	Specify the default X visual to use for figure windows.

Option	Description (Continued)
<b>-n</b>	Display final values of environment variables and arguments passed to MATLAB (without starting MATLAB).
<b>-nodesktop</b>	<p>Start MATLAB without bringing up the MATLAB desktop. Use this option to run without an X-window, for example, in VT100 mode, or in batch processing mode. Note that if you pipe to MATLAB using the &gt; constructor, the nodesktop option is used automatically.</p> <p>With nodesktop, you can still use most development environment tools by starting them via a function. Specifically use</p> <ul style="list-style-type: none"> <li>• <code>commandhistory</code> to open the Command History</li> <li>• <code>edit</code> to open the Editor/Debugger</li> <li>• <code>helpbrowser</code> to open the Help browser</li> <li>• <code>filebrowser</code> to open the Current Directory browser</li> <li>• <code>workspace</code> to open the Workspace browser</li> <li>• <code>openvar</code> to open the Array Editor</li> <li>• <code>profile viewer</code> to open the Profiler</li> <li>• <code>uiimport</code> to open the Import Wizard</li> </ul> <p>Don't use nodesktop to provide a command line interface. If you prefer a command line interface, select <b>Desktop -&gt; Desktop Layout -&gt; Command Window Only</b>.</p>
<b>-nodisplay</b>	MATLAB ignores the <b>display</b> argument.

<b>Option</b>	<b>Description (Continued)</b>
<b>-nojvm</b>	Start MATLAB without loading the Java VM. This minimizes memory usage and improves initial startup speed. With <code>nojvm</code> , you cannot use the desktop, or any of the tools that require Java.
<b>-nosplash</b>	Start MATLAB without displaying the splash screen during startup.
<b>-r MATLAB_command</b>	Automatically run the specified MATLAB command immediately after MATLAB starts. This is also referred to as calling MATLAB in batch mode. Separate multiple commands with commas or semicolons (;). See also “Notes About Startup Options” on page 1-7.

## **Toolbox Path Caching in MATLAB**

For performance reasons, MATLAB caches toolbox directory information across sessions. The caching features are mostly transparent to you. However, if MATLAB does not see the latest versions of your M-files or if you receive warnings about the toolbox path cache, you might need to update the cache.

### **Startup Using Cache File**

Upon startup, MATLAB gets information from a cache file to build the toolbox directory cache. Because of the cache file, startup is faster, especially if you run MATLAB from a network server or if you have many toolbox directories. When you end a session, MATLAB updates the cache file.

MATLAB does not use the cache file at startup if you clear the **Enable toolbox path cache** check box in **File -> Preferences -> General**. Instead, it creates the cache by reading from the operating system directories, which is slower than using the cache file.

## Updating the Cache

**How the Toolbox Path Cache Works.** MATLAB caches (essentially, stores in a known files list) the names and locations of files in `$matlabroot/toolbox` directories. These directories are for MathWorks supplied files that should not change except for product installations and updates. Caching those directories provides better performance during a session because MATLAB does not actively monitor those directories.

We strongly recommend that you save any M-files you create and any MathWorks-supplied M-files that you edit in a directory that is *not* in the `$matlabroot/toolbox` directory tree. If you keep your files in `$matlabroot/toolbox` directories, they may be overwritten when you install a new version of MATLAB.

**When to Update the Cache.** When you add files to `$matlabroot/toolbox` directories, the cache and the cache file need to be updated. MATLAB updates the cache and cache file automatically when you install toolboxes or toolbox updates using the MATLAB installer. MATLAB also updates the cache and cache file automatically when you use MATLAB tools, such as when you save files from the MATLAB Editor to `$matlabroot/toolbox` directories.

When you add or remove files in `$matlabroot/toolbox` directories by some other means, MATLAB might not recognize those changes. For example, when you

- Save new files in `$matlabroot/toolbox` directories using an external editor
- Use operating system features and commands to add or remove files in `$matlabroot/toolbox` directories

MATLAB displays this message

```
Undefined function or variable
```


You need to update the cache so MATLAB will recognize the changes you made in `$matlabroot/toolbox` directories.

**Steps to Update the Cache.** To update the cache and the cache file

- 1 Select **File -> Preferences -> General**.

The **General Preferences** panel is displayed.

2 Click **Update Toolbox Path Cache** and click **OK**.

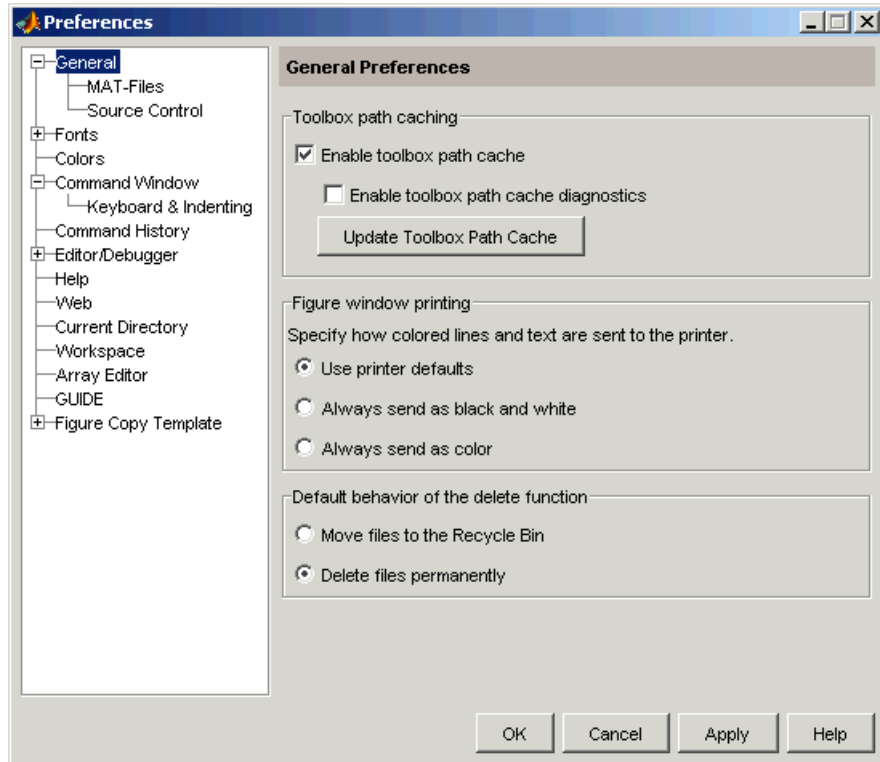

**Function Alternative.** To update the cache, use `rehash toolbox`. To also update the cache file, use `rehash toolboxcache`. For more information, see `rehash`.


### Additional Diagnostics with Toolbox Path Caching

To display information about startup time when you start MATLAB, select the **Enable toolbox path cache diagnostics** check box in **General Preferences**.



## Quitting MATLAB

To quit MATLAB at any time, do one of the following:

- Click the close box  in the MATLAB desktop.
- Select **Exit MATLAB** from the desktop **File** menu.
- Type quit at the Command Window prompt.

Unless unsaved files are open, MATLAB closes immediately. If you want to see a warning that allows you to confirm quitting, use the `finishdlg.m` script, as described in the next paragraph.

### Running a Script When Quitting MATLAB

When MATLAB quits, it runs the script `finish.m`, if `finish.m` exists in the current directory or anywhere on the MATLAB search path. You create the file `finish.m`. It contains functions to run when MATLAB terminates, such as saving the workspace or displaying a confirmation dialog box. There are two sample files in `$matlabroot/toolbox/local` that you can use as the basis for your own `finish.m` file:

- `finishesav.m`—Includes a save function so the workspace is saved to a MAT-file when MATLAB quits.
- `finishdlg.m`—Displays a confirmation dialog box that allows you to cancel quitting.

For more information, see `finish`.



# Desktop

---

The easiest way to learn to use the desktop is just by working with it. Refer to this information if you have problems or questions.

Overview of the Desktop (p. 2-2)

Basic summary of the desktop and its tools.

Arranging the Desktop—Overview  
(p. 2-5)

Open and arrange desktop tools and documents to suit your needs. Scan the examples and follow the instructions to arrange your desktop.

Common Desktop Features (p. 2-19)

Details regarding the **Start** button, MATLAB shortcuts, toolbars, menus and context menus, status bar, and keyboard shortcuts and accelerators. Also includes selecting multiple items, cut, copy, and paste, using page setup for printing, and accessing the MathWorks Web site from MATLAB.

Fonts, Colors, and Other Preferences  
(p. 2-44)

Specify options for desktop tools, including fonts and colors.

### Overview of the Desktop

When you start MATLAB, the first thing you see is the MATLAB desktop, consisting of tools (GUIs or graphical user interfaces) for managing files, variables, and applications associated with MATLAB.

The first time you start MATLAB, the desktop appears with the default layout, as shown in the following illustration. You can change the desktop arrangement to meet your needs, including resizing, moving, and closing tools. For details, see “Arranging the Desktop—Overview” on page 2-5.

The Editor/Debugger and Array Editor support multiple document windows within them, and similarly, you can group multiple figure windows together. For information about working with documents in the desktop, see “Opening and Arranging Documents” on page 2-7 for more information.

If you are using the Help browser, watch the Desktop and Command Window video demo for an overview of the major functionality.

## Example of Desktop—Default Layout


Menus change, depending on the tool you are currently using.

Use tab to go to Workspace browser.

Get help.

View or change current directory.

Move Command Window outside of desktop (undock).

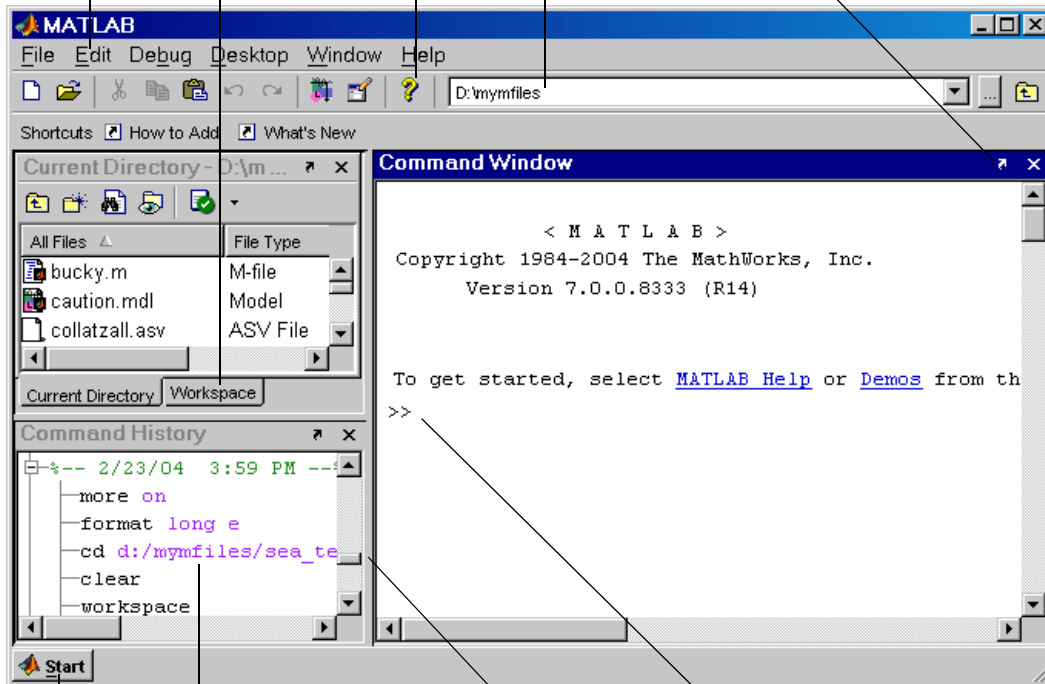

Click for quick access to tools and more.

View or execute previously run functions from the Command History.

Drag the separator bar to resize windows.

Enter MATLAB functions at command line prompt.

## Summary of Desktop Tools

The following tools are managed by the MATLAB desktop, although not all of them appear by default when you first start. If you prefer a command-line interface, you can often use equivalent functions to accomplish the same result as using features in desktop tools. You must use these equivalent functions to perform the operations in M-files. Instructions for using equivalent functions are provided with the documentation for each tool.

<b>Desktop Tool</b>	<b>Description</b>
Array Editor	View array contents in a table format and edit the values.
Command Window	Run MATLAB functions.
Command History	View a log of the functions you entered in the Command Window, copy them, execute them, and more.
Current Directory Browser	View files, perform file operations such as open, find files and file content, and manage and tune your files.
Editor/Debugger	Create, edit, and debug M-files (files containing MATLAB functions).
Figures	Create, modify, view, and print MATLAB figures.
Help Browser	View and search the documentation for all your MathWorks products.
Profiler	Improve the performance of your M-files using this graphical interface.
Start Button	Run tools and access documentation for all of your MathWorks products, and create and use MATLAB shortcuts.
Web Browser	View HTML and related information produced by MATLAB.
Workspace Browser	View and make changes to the contents of the workspace.

## Arranging the Desktop—Overview

You can modify the desktop configuration to best meet your needs. Because the desktop uses many standard user interface conventions, it is easy to learn about arranging the desktop just by using it. If you are not familiar with any of the interface elements, refer to the overview information and examples in this section.

The desktop manages tools and documents differently. The Command History and Editor/Debugger are examples of tools, and an M-file is an example of a document that appears in the Editor/Debugger tool.

These are the main actions you perform in arranging your desktop tools and documents:

- “Opening and Arranging Tools” on page 2-6
- “Opening and Arranging Documents” on page 2-7
- “Saving Desktop Layouts” on page 2-18



See also “Examples of Desktop Arrangements” on page 2-11.

## Opening and Arranging Tools

This table summarizes actions for arranging desktop tools. For further information, click the “See more details online” links, which provide additional information, available only online.

Tool Action	Steps to Perform
Opening Desktop Tools	<p>To maximize your work area, keep open only those tools you use. To open a tool, select the tool name from the <b>Desktop</b> menu. Opened tools have a check mark before them in the menu. The tool appears in the location it occupied the last time it was open. The sizes of other tools adjust to accommodate the newly opened tool. See more details online.</p> <p>Documents and the tools they are associated with can be part of the desktop, but you do not open them via the <b>Desktop</b> menu. Instead, you open a document and it opens the associated tool. See “Opening and Arranging Documents” on page 2-7.</p>
Navigating Among Desktop Tools	<p>The <b>Window</b> menu displays all open desktop tools and documents, as well as tools for other MathWorks products. Select an entry in the <b>Window</b> menu to go directly to that tool or document. Another way to access an undocked desktop tool is by selecting its entry in the Windows task bar, or the equivalent for your platform. See more details online.</p>
Closing Desktop Tools	<p>To close a desktop tool, select the item in the <b>Desktop</b> menu, which clears the check mark in the menu and closes the tool. Or click the close box (X) in the title bar for the tool. See more details online.</p>
Resizing Tools	<p>To resize tools in the MATLAB desktop, drag the separator bar, which is the bar between two tools. You can hide the title bars for tools in the desktop so the tools use less space—select <b>Desktop -&gt; Titles</b>. See more details online.</p>
Moving Tools Within the Desktop	<p>To move a tool in the MATLAB desktop, drag the title bar of the tool toward where you want the tool to be located. As you drag the tool, an outline of it appears. When the outline nears a position where you can keep it, the outline snaps to that location. Release the mouse button. The tool stays at the new location. Other tools in the desktop resize to accommodate the new configuration. The inside edges of the desktop container and tools all act as if they are “sticky,” so you can position a tool along any inside edge. See more details online.</p>



Tool Action	Steps to Perform (Continued)
Moving Tools Out of the Desktop (Undocking)	Move a tool out of the desktop to make it larger or easier to work with. To move a tool outside the MATLAB desktop (called undocking), select the tool to make it active, and then select <b>Desktop -&gt; Undock -&gt; Toolname</b> . The tool appears outside the MATLAB desktop and an entry for it appears in the Windows task bar, or the equivalent for your platform. Tools within the desktop resize accordingly. Another way to undock is by using the undock arrow  in the tool's title bar. See more details online.
Moving Tools into the Desktop (Docking)	To move a tool that is outside the MATLAB desktop into the desktop, click the dock arrow  in the tool's menu bar, or select <b>Desktop -&gt; Dock Toolname</b> . See more details online.
Grouping (Tabbing) Tools Together	You can group tools so that they overlay each other in the MATLAB desktop, and then access each tool via tabs. To group tools together, drag the title bar of one tool in the desktop on top of the title bar of another tool in the desktop. To make a tool active, click its tab. See more details online.

## Opening and Arranging Documents

Open a document, such as an M-file or a variable, and it opens in its tool, for example, the Editor/Debugger or Array Editor. The following illustration shows a desktop arrangement that includes Editor/Debugger and Array Editor documents. See instructions in “Summary of Actions for Arranging Documents” on page 2-9.

### Example of Documents in the Desktop

Some common actions for working with documents in the desktop are:


- Use tabs to go to open tools. Use the document bar to go to open documents.
- Use the **Window** menu or toolbar icons to position documents.
- Close or undock a tool, including all documents in the tool.
- Undock a document from its tool. Use the document close box with the **Ctrl** key to close the document without saving or displaying the unsaved document dialog box.

See also “Examples of Desktop Arrangements” on page 2-11.

Close or undock active tool, including all open documents in the tool.

Position documents with these icons.

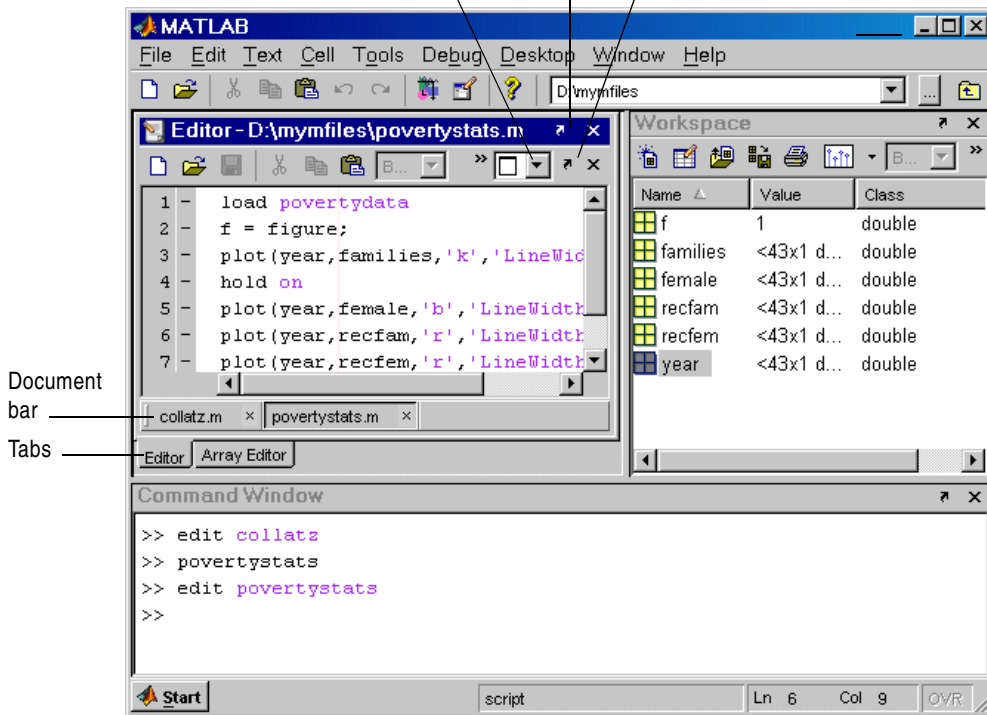


Undock document from tool.




## Summary of Actions for Arranging Documents

This table summarizes actions for arranging documents in their tool. For further information, click the “See more details online” links, which provide additional information, available only online.

Document Action	Overview
Opening Documents	<p>When you open a MATLAB document, it opens in the associated tool. If the tool is not already open, it opens when you open the document, and appears in the position it occupied when last used. Figures and Web browsers open undocked, regardless of the last position occupied.</p> <p>How to open a document depends on the document type:</p> <ul style="list-style-type: none"> <li>• M-file: Select <b>File -&gt; Open</b> and select the M-file. It opens in the Editor/Debugger.</li> <li>• Workspace variable: In the Workspace browser, double-click the variable. It opens in the Array Editor.</li> <li>• HTML document: In the Current Directory browser, double-click the file. It opens in the Web browser.</li> <li>• Figure: Type <code>plot</code> or use another graphics function. The plot appears in a figure window.</li> </ul> <p>There are many additional ways to open documents. See more details online.</p>
Navigating Among Documents—The document bar	<p>When more than one document is open within a tool, each document is either maximized (the default), or arranged so that multiple documents are visible at once. Click a document that is in view to make it the active document.</p> <p>Use the document bar to go to a document that is not in view. The names of all open documents appear in the document bar. Select a document name in the document bar to make that document active. To show the document bar if it is not open, select <b>Desktop -&gt; Document Bar</b>, and select a position for its location, for example, <b>Right</b>. See more details online.</p> <p>Entries for undocked documents appear in the Windows task bar, or the equivalent for your platform. Click the task bar entry for a document to make that document active.</p>

<b>Document Action</b>	<b>Overview (Continued)</b>
Positioning, Moving, and Resizing Documents	<p>To position open documents within their tool, select an arrangement from the <b>Window</b> menu when the tool is active, or by using an icon on the toolbar for <b>Maximize, Float, Left/Right Split, Top/Bottom Split, and Tile</b>. On the Macintosh platform, the tile option is not available in the <b>Window</b> menu so use the tile icon  instead.</p> <p>With the split and tile arrangements, you refine the document position by moving the cursor over the handle (▪) on the separator bar. A close box then appears. When you click the close box between two open documents, both documents stay open, but one moves over the top of the other. When you click the close box between a document and an empty tile, the empty tile closes. To move a document in a tiled or split arrangement, drag the title bar of a document to another tile. If the documents use the tiled or split arrangement, drag the separator bar that is between the documents to resize them.</p> <p>To move or resize maximized documents, you move or resize the tool. Or, right-click a document name in the document bar to move it. See more details online.</p>
Closing Documents	<p>To close a document, click the close box in that document's title bar. After closing all the documents in a tool, the tool remains open with no documents in it. If you select the close box for the tool, all documents in that tool close. Upon closing an M-file with unsaved changes, a prompt appears asking if you want to save the document. To close the document without saving changes and without seeing the prompt, use <b>Ctrl</b> with the document's close box. See more details online.</p>
Moving Documents and Tools Out of the Desktop (Undocking)	<p>To undock all documents in a tool from the desktop, click the undock button  in the tool's title bar. The tool and its documents move outside of the desktop. See more details online.</p> <p>To undock a document from its tool, click the undock button  for the document. The undock button is either in the document's title bar, menu bar, or toolbar, depending on the document type and whether or not the document is within the desktop or is in its tool outside of the desktop.</p> <p>Undocked tools and documents have entries in the Windows task bar (or the equivalent for your platform) and each document type has a unique icon.</p>

<b>Document Action</b>	<b>Overview (Continued)</b>
Docking Documents and Tools	When you dock a document that is external to the desktop, it moves to the position in the tool that it occupied before you undocked it. To dock a document, click the dock button  in the document's menu bar. Note that on Macintosh platforms, you cannot dock figure windows. See more details online.
Grouping Documents in a Tool Outside the Desktop	To group all of the documents for a tool together outside of the desktop, undock the tool from the desktop, not just the documents. If you have already undocked all of the documents and closed the empty tool that had contained them, select <b>Desktop -&gt; Dock All in Editor</b> . This moves all the documents into the tool in the desktop. Then undock the tool.


## Examples of Desktop Arrangements

Scan the illustrations in the following examples for a desktop arrangement similar to what you want, and then follow the brief instructions to achieve the arrangement. There are many different ways to accomplish the result and instructions present just one way. Depending on how your desktop looks before you start, the instructions might not apply exactly.

- “Tool Outside of Desktop and Other Tools Tabbed Inside Desktop Example” on page 2-12
- “Tiled Documents in Desktop Example” on page 2-13
- “Maximized Documents Outside of the Desktop Example” on page 2-15
- “No Empty Tiles in Desktop Example” on page 2-14
- “Floating (Cascaded) Figures in Desktop Example” on page 2-16
- “Undocked Tools and Documents Example” on page 2-17

### Tool Outside of Desktop and Other Tools Tabbed Inside Desktop Example


This example shows two ways you can increase the size of a tool.

The Command Window is outside of the desktop. To achieve this, click the undock arrow  in the tool's title bar when the tool is in the desktop.


You can group tools together inside the desktop and access them via labeled tabs. Here the Current Directory browser, Workspace browser, and Command History are tabbed together. To achieve this, drag the title bar of one tool on top of the title bar of the tool(s) you want to group it with.

Tool undocked from desktop.

Tools tabbed together in desktop.

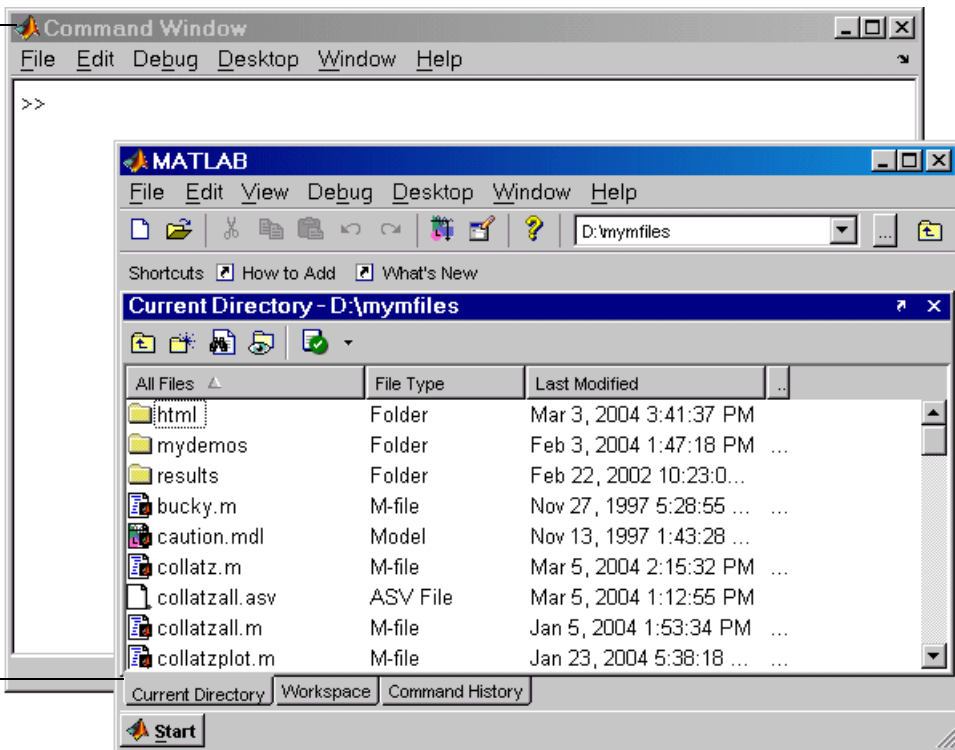


## Tiled Documents in Desktop Example

When you open a document (for example, an M-file), it also opens the tool (for example, the Editor). You can dock the tool in the desktop, as shown here. If tools or documents are outside the desktop, to move them inside, click the dock arrow  in the tool and in any separate M-file's menu bars, or use **Desktop -> Dock** menu items. Select **Left/Right Split** from the **Window** menu or use the toolbar icon to show two M-files side-by-side.

You can hide a toolbar. Here, the shortcuts toolbar is hidden. Select **Desktop -> Toolbar name** to hide (or show) a toolbar. To see or move the document bar, select **Desktop -> Document Bar**, and choose its location, for example, **Top**.

The shortcuts toolbar is hidden. The document bar is at the top of the Editor/Debugger.

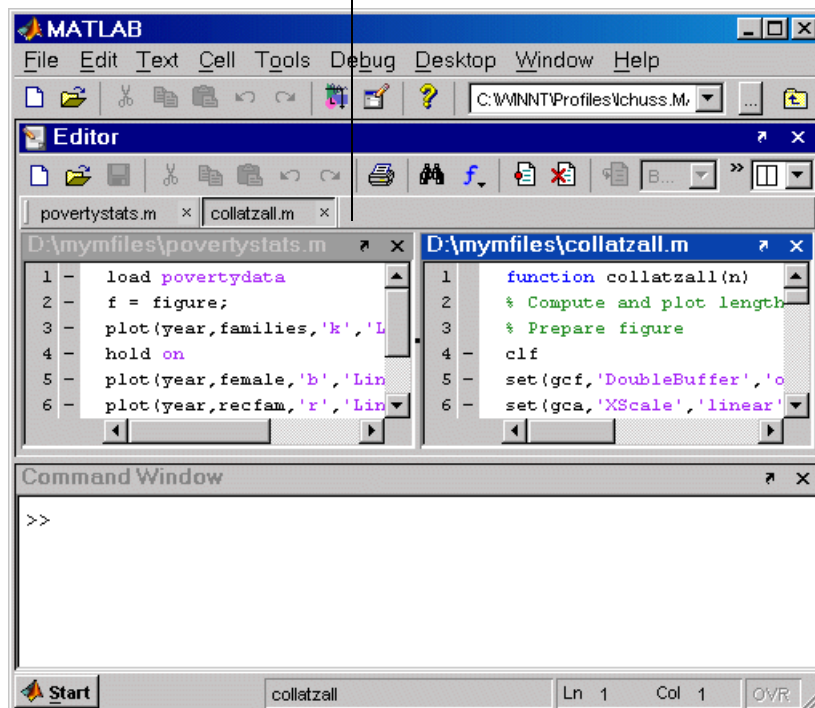

## No Empty Tiles in Desktop Example

You can hide a document under another—drag a document’s title bar on top of another document. The document on top fully covers the document underneath. This gives more space to the active document. To see hidden documents, use the **Window** menu or document bar.



To show two documents at once use a split arrangement. To see more than two documents at once, select the tile icon and move the cursor across the grid menu to select the number of tiles you want. The grid in this example has four tiles, but there are only three documents open. (The empty tile will be shown in gray in the menu.) You can move a document to any empty tile by dragging its title bar to the new location. To close empty tile, position the cursor over the handle on the separator bar. It becomes a close box, as shown here, which you click to close the empty tile. After clicking the close box, the empty tile closes and the neighboring tile expands as shown here. Similarly, click the close box between two tiles containing documents and one becomes hidden.

Before

After

Tile more than two documents with the grid icon.

Close an empty tile using the handle on the separator bar.

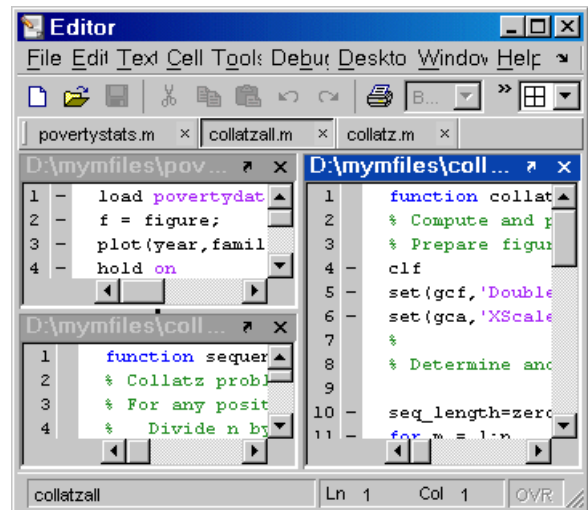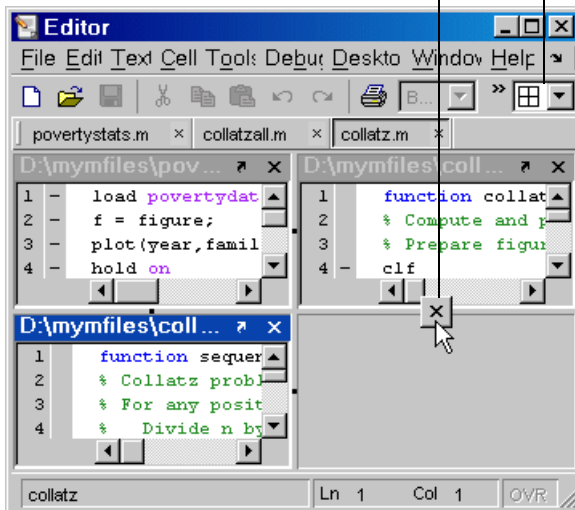




## Maximized Documents Outside of the Desktop Example


Some common actions for working with documents outside of the desktop are:


- Group all Editor documents together—select **Desktop -> Dock All in Editor** from any Editor document.
- Move all Editor documents outside of the desktop—select **Desktop -> Undock Editor** when the Editor is the active window.
- Make a document occupy the full area in the Editor—click the maximize document icon, or select **Window -> Maximize**.
- Display the cell toolbar—select **Cell -> Enable Cell Mode**.
- Access any document using the document bar in the Editor. To show the document bar on the left side of the Editor, select **Desktop -> Document Bar -> Left** from the Editor.

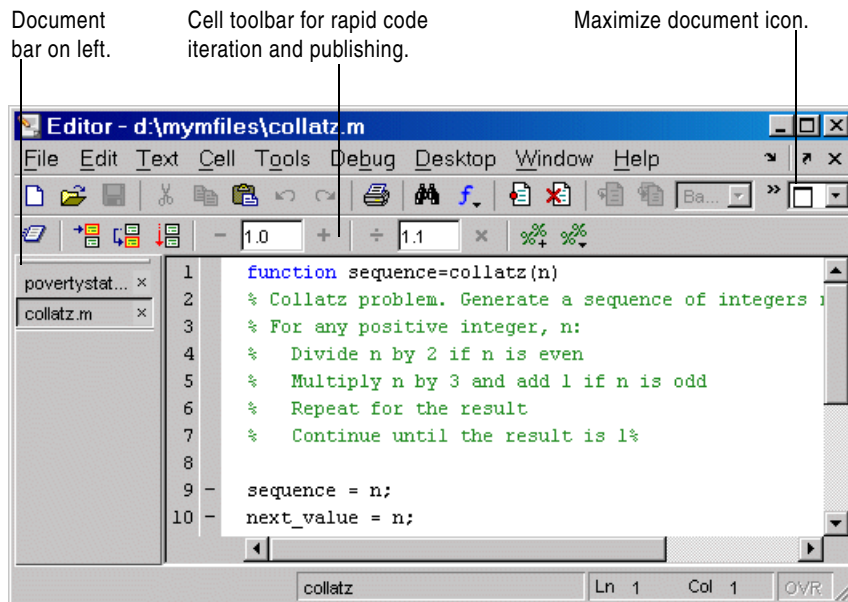

## Floating (Cascaded) Figures in Desktop Example

You can show multiple figures at once in the desktop. By default, figures open outside the desktop. Click the dock button in each figure's menu bar to move the figures into the desktop.


You can float (also called cascade) the figures by selecting **Window -> Float**, or clicking the float icon . This arrangement is not available on the Macintosh platform. To get even more screen area for the figures, hide the document bar as shown in this example—select **Desktop -> Document Bar -> Hide**.

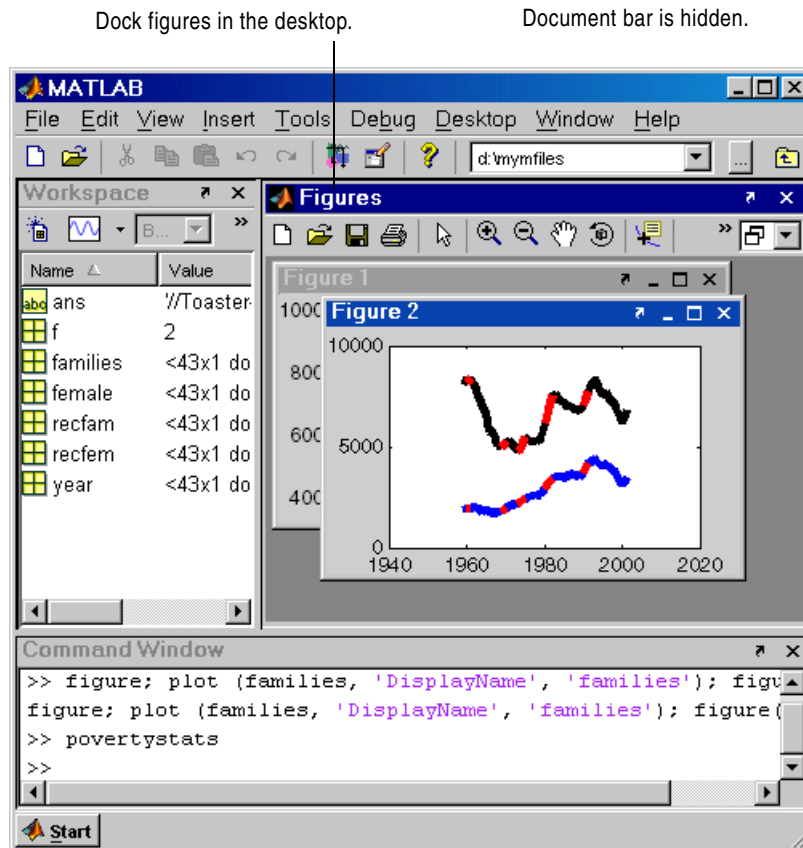

## Undocked Tools and Documents Example

You can use tools and documents outside of the desktop. One way to achieve this is to first undock the tool from the desktop by selecting **Desktop -> Undock Toolname**. Then undock documents from the undocked tool by selecting **Desktop -> Undock Documentname** from the tool. If you undock all documents from a tool, an “empty” tool window remains.

In this example, one of the Editor documents, `povertystats.m`, includes the name of the tool with it and the other Editor document, `collatz.m`, does not. Contrast this with the Array Editor documents, where neither document window includes the name of the tool. This is because when documents are undocked from both the desktop and their tool, you can close the tool but the tool’s undocked documents remain open. If you closed the Editor, the `collatz.m` document would remain open. To close all undocked documents and their tools at once, select **Window -> Close All Documents** from an undocked document window.

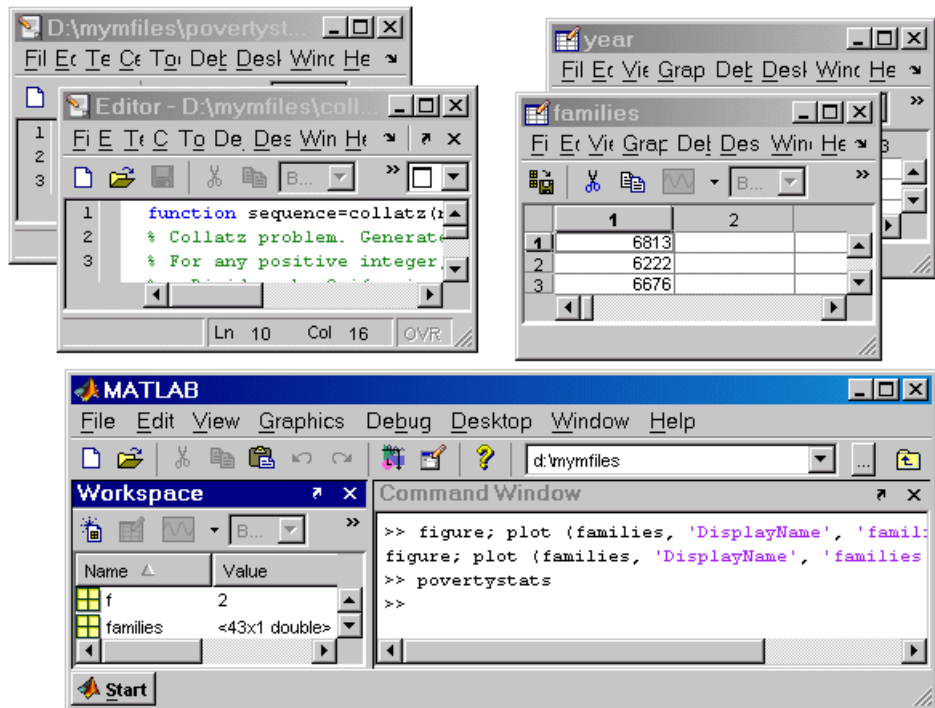

### **Saving Desktop Layouts**

When you end a session, MATLAB saves the desktop layout. The next time you start MATLAB, the desktop is restored the way you left it.

To use a predefined layout, select **Desktop -> Desktop Layout**, and choose a configuration. See “Predefined Layouts” in the online documentation for more information.

To save your own layouts for later reuse, select **Desktop -> Save Layout**, and provide a name. Reuse the layout by selecting the name from **Desktop -> Desktop Layout**. See “Saving Your Own Desktop Layouts” in the online documentation for more information.

## Common Desktop Features

This section presents useful details about common features of desktop tools:


- “Start Button for Accessing Tools” on page 2-19
- “Shortcuts for MATLAB—Easily Run a Group of Statements” on page 2-21
- “Web Browser” on page 2-29
- “Menus and Context Menus” on page 2-31
- “Toolbars” on page 2-32
- “Status Bar” on page 2-34
- “Sizing, Arranging, and Sorting Columns in Tools” on page 2-34
- “Keyboard Shortcuts” on page 2-35
- “Selecting Multiple Items” on page 2-38
- “Cut, Copy, and Paste” on page 2-39
- “Page Setup Options for Printing” on page 2-40
- “Accessing The MathWorks on the Web” on page 2-42

### Start Button for Accessing Tools

The MATLAB **Start** button provides easy access to tools, demos, and documentation for all your MathWorks products. You can also create and run MATLAB shortcuts from it, where a shortcut is a group of MATLAB statements.

#### Using the Start Button



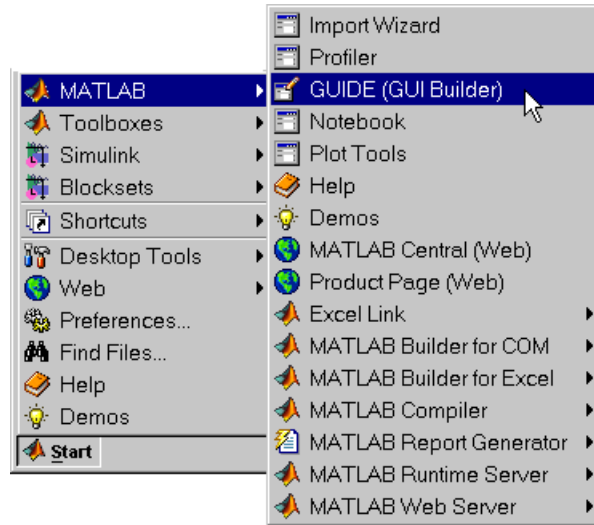


- 1 Click the **Start** button to view a menu of product categories and desktop tools installed on your system. As an alternative, press **Alt+S** to view the **Start** button contents.



**2** From the menu and submenu items, select an item to open it. Use the icons to quickly locate a type of product or tool—see the following description of icons.

For example, select **Start -> MATLAB -> GUIDE (GUI Builder)** to open that tool.

**Icons in the Start Button.** Icons help you quickly locate a particular type of product or tool. This legend describes the action performed when you select an entry with one of these icons in the **Start** button.

<b>Icon</b>	<b>Description of Action When Opened</b>
	Documentation for that product opens in the Help browser.
	Demos for the product are listed in the Help browser <b>Demos</b> tab.
	Selected tool opens.
	Block library opens.
	Document opens in your system Web browser.

### Customizing the Start Button

You can add your own toolboxes to the **Start** button. Select **Start -> Desktop Tools -> View Source Files** to open the **Start Button Configuration Files** dialog box. For details, click the **Help** button in the dialog box, which displays “Adding Your Own Toolboxes to the Development Environment”, a topic in the online documentation.

## Shortcuts for MATLAB—Easily Run a Group of Statements

A MATLAB shortcut is an easy way to run a group of MATLAB functions that you use regularly. These topics are covered:

- “What Is a Shortcut?” on page 2-22
- “Examples of Useful Shortcuts” on page 2-22
- “Creating Shortcuts” on page 2-23
- “Running Shortcuts” on page 2-25
- “Shortcuts Toolbar” on page 2-25
- “Organizing and Editing Shortcuts” on page 2-28

## What Is a Shortcut?

A MATLAB shortcut is an easy way to run a group of MATLAB statements. First you create a shortcut that contains all of the statements. Then you select and run the shortcut to execute all the statements it contains. Create, run, and organize shortcuts from the **Start -> Shortcuts** menu or the desktop **Shortcuts** toolbar.

**Differences Between Shortcuts and M-Files.** A shortcut is like an M-file script, but unlike an M-file, a shortcut does not have to be on the MATLAB search path or in the current directory when you run it. In addition, you conveniently run the shortcut by selecting it from the **Start** button or desktop **Shortcuts** toolbar, which are readily accessible.

Although shortcuts run MATLAB statements, they are not M-files and are not stored as M-files.

## Examples of Useful Shortcuts

These are some examples of useful types of shortcuts:

- If you frequently run the same group of functions, consider creating a shortcut for them. An example of this is setting up your environment when you start working if you do not use a startup file, or if there are statements you do not want to include in the startup file. Some users create a shortcut for even a single function they use frequently, such as `clc` to clear the screen.
- Create a shortcut to set the same properties for figures you create, such as adding a legend and setting the background color.
- Create a shortcut for a long statement, such as changing the current directory (`cd`), when the pathnames are long.
- Create a shortcut for a statement you do not easily remember but need to use.



## Creating Shortcuts


This is an example of a shortcut you might create for a project you work on, the Sea Temperature project. When you work on that project you like to set up your environment in a certain way by running a series of statements. You create a shortcut called `sea_temp_env`, which contains the statements. Then when you work on the project, you run the shortcut to execute all of the statements with a single click. The statements are


```
more on
format long e
cd d:/mymfiles/sea_temp_project
clear
workspace
filebrowser
clc
```

To create a shortcut, perform the following steps:

- 1 From the **Start** button, select **Shortcuts -> New Shortcut**.

The **Shortcut Editor** dialog box appears.

- 2 Create the shortcut by completing the dialog box, as shown in the following illustration.
  - a Provide a shortcut name in the **Label** field, for example, `sea_temp_environment`.
  - b Put the environment setup statements in the **Callback** field as shown in the following illustration. Either type them in, or copy and paste or drag them from a desktop tool. Edit the statements as needed. The field uses the key bindings preferences you specified for the Editor and the Desktop code font preferences you specified. Note that if you copy the statements from the Command Window, the prompt appears in the shortcut, but MATLAB removes the prompt when you save the shortcut.
  - c Assign a category, which is like a directory for organizing shortcuts. Specify `sea_temp_project`. To add the shortcut to the shortcuts toolbar, select the **Toolbar Shortcuts** category.
  - d Use the default shortcuts icon , or select your own.
  - e Click **Save**. MATLAB automatically removes any Command Window prompts (`>>`) in the **Callback** field upon saving the shortcuts.

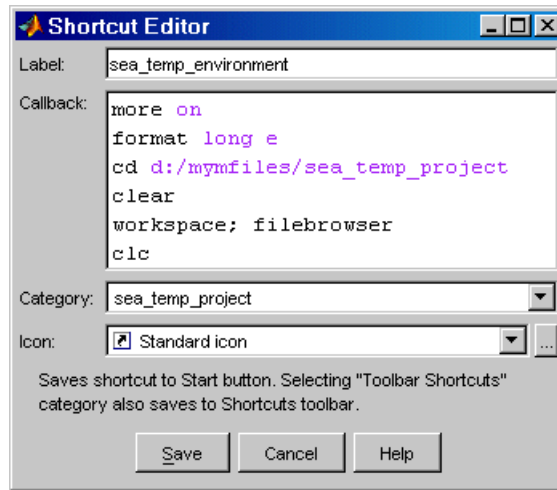

- 3 MATLAB adds the shortcut to the **Shortcuts** entry on the **Start** button, and to the shortcuts toolbar, if you selected that category.

After creating a shortcut, run it by selecting it from its category in the **Start** button. You can also run it from the **Shortcuts** toolbar if you selected the **Toolbar Shortcuts** category.

MATLAB maintains shortcut information in the file `shortcuts.xml`. Type `prefdir`, and MATLAB displays the location of the file. Most likely, you will not need to access this file, as MATLAB updates the file automatically.

For more information on the options in the **Shortcut Editor** dialog box, click the **Help** button.

**Additional Ways to Create Shortcuts.** You can also use these methods to create shortcuts:

- Add shortcuts to and run them from the desktop **Shortcuts** toolbar. See “Shortcuts Toolbar” on page 2-25.
- From the Command History, create a shortcut by selecting statements, right-clicking, and selecting **Create Shortcut** from the context menu. By default, shortcuts created from the Command History are assigned to the Toolbar category, meaning they will appear on the **Shortcuts** toolbar.
- From the Help browser, select **Favorites -> Add to Favorites**, complete the **Favorites Editor** dialog box, and the shortcut appears in the shortcuts Help Browser Favorites category. You can also access shortcuts that have the Help Browser Favorites category from the Help browser **Favorites** menu.
- Drag statements from a desktop tool, such as the Command History, onto the **Start** button.

## Running Shortcuts

To run a shortcut, select the shortcut name, for example, **sea\_temp\_environment**, from the **Start -> Shortcuts** menu or from one of its category submenus. All of the statements in the shortcut **Callback** field execute. It is as if you ran those statements from the Command Window, although they are not reflected in the Command History.


If you added a shortcut to the **Shortcuts** toolbar, you can run it by clicking its icon on the shortcuts toolbar.

## Shortcuts Toolbar

You can create and run shortcuts via the desktop **Shortcuts** toolbar. To show or hide the shortcuts toolbar, use **Desktop -> Shortcuts Toolbar**. The shortcuts toolbar is an alternative to creating and running shortcuts via the **Start** button:

- 1 Select statements from the Command History, the Command Window, or an M-file.
- 2 Drag the selection to the desktop **Shortcuts** toolbar. The following illustration shows two statements being dragged from the Command Window.

Shortcuts toolbar—Drag statements to it to create a shortcut.

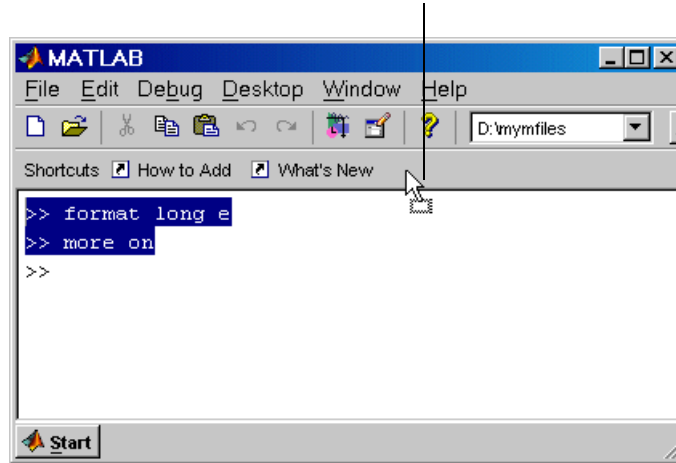


- 3 The **Shortcut Editor** dialog box appears. The **Callback** field contains the selected statements, which you can edit as needed. If prompts (>>) from the Command Window appear, note that MATLAB automatically removes them when you save the shortcut. The **Category** field is **Toolbar Shortcuts**, which you must keep so the shortcut appears on the toolbar.

Provide the **Label**, select an **Icon**, and click **Save**.

The shortcut icon and label appear on the toolbar. If you have more shortcuts on the toolbar than can be displayed at once, use the drop-down list to access all of them.

- 4 Click the icon on the **Shortcuts** toolbar to run the shortcut. You can also run the shortcut from the **Start** button by selecting it in the **Toolbar Shortcuts** category.

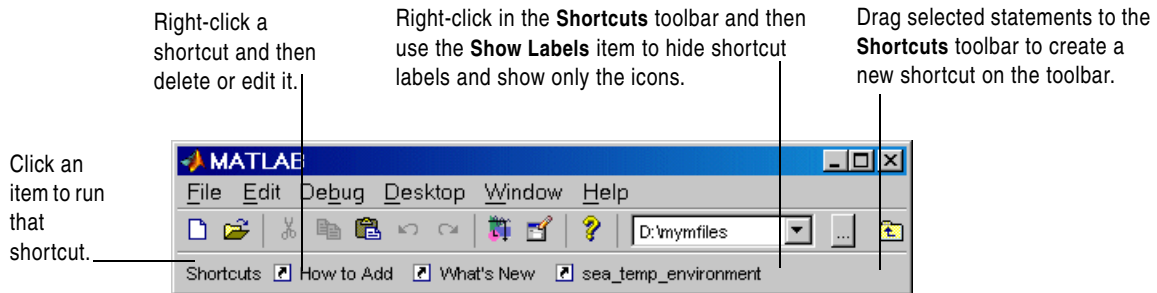

You can also add a shortcut to the desktop **Shortcuts** toolbar by right-clicking the toolbar and selecting **New Shortcut**. Complete the resulting **Shortcut Editor** dialog box. Assuming you maintain the **Toolbar Shortcuts** category, the shortcut appears on the toolbar. To change the order of the shortcuts on the toolbar, select **Start -> Shortcuts -> Organize Shortcuts** and move the shortcuts within the **Toolbar Shortcuts** category.

**How to Add and What's New Shortcuts.** The **Shortcuts** toolbar includes two shortcuts. The **How to Add** shortcut provides help about shortcuts and adding them to the **Shortcuts** toolbar. **What's New** displays the Release Notes documentation.

To remove the **How to Add** or **What's New** shortcut from the **Shortcuts** toolbar, move them to a different category. For instructions, see “Organizing and Editing Shortcuts” on page 2-28.

If you do not want to keep these shortcuts, remove each one by right-clicking its toolbar shortcut button and selecting **Delete** from the context menu. Click **OK** in the confirmation dialog box to remove the shortcut.

**Shortcut Labels on Toolbar.** You can hide the shortcut labels on the toolbar. Right-click in the **Shortcuts** toolbar. From the context menu, select **Show Labels**, which clears the check mark next to the item. The shortcut icons appear on the toolbar without labels. When you move the mouse over a shortcut icon, its label appears as a tooltip. To make labels display in the toolbar, right-click the toolbar and select **Show Labels** again, which selects the item and displays the labels.


## Organizing and Editing Shortcuts

To create categories for shortcuts, and to move, edit, and delete shortcuts, perform these steps:

- 1 Select **Shortcuts -> Organize Shortcuts** from the **Start** button. Access it via the shortcuts toolbar context menu.

The **Shortcuts Organizer** dialog box appears.

Move shortcuts and more. For example, drag a shortcut to another category.

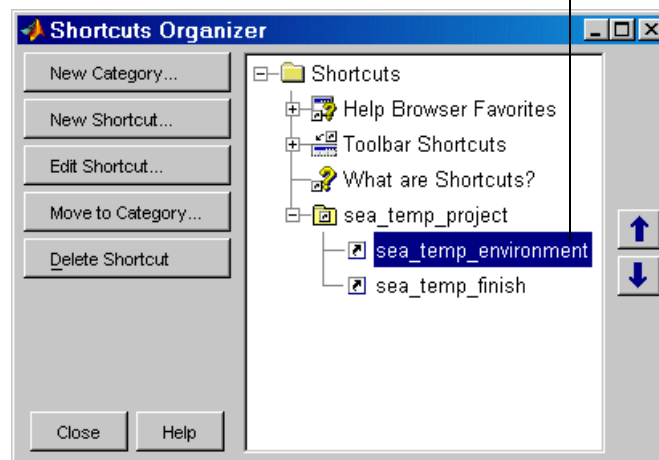

- 2 Use the buttons in the dialog box to edit and organize shortcuts and categories. You can also right-click an item and select an action from the context menu.

Changes take effect immediately.

- 3 Click **Close**.


MATLAB maintains the shortcuts in the `shortcuts.xml` file. To see the directory where the file is stored, run `prefdir`.

For more information on what you can do in the **Shortcuts Organizer** dialog box, click the **Help** button.

## Web Browser

Some tools in MATLAB and related products display HTML or XML documents in the MATLAB Web browser. For example, after using the Editor's cell features to publish an M-file to HTML, you view the HTML file in the MATLAB Web browser. Because the MATLAB Web browser is a desktop tool, you can dock it and perform other desktop operations on it.

Example of Web browser displaying results of M-file published to HTML format.

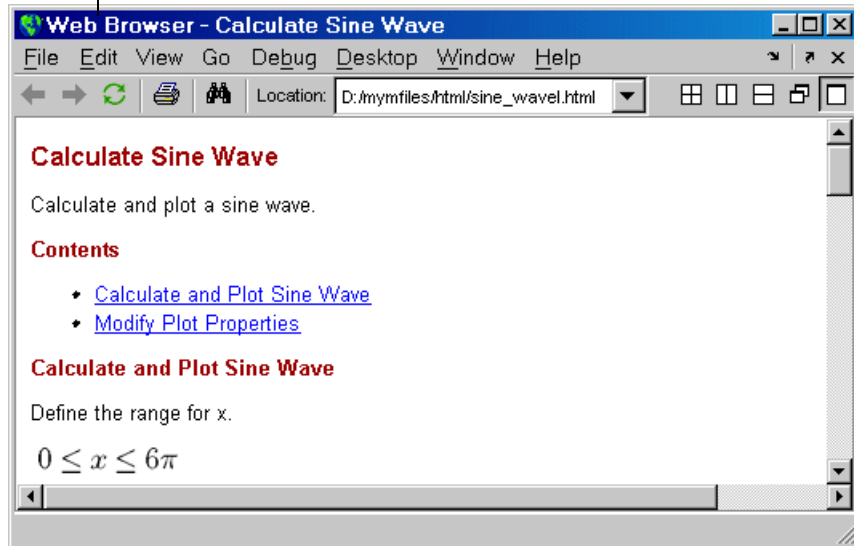

To display documents in the Web browser, use the web function. The web function supports arguments that allow you to display documents in your system browser, for example, Netscape, or in the Help browser.

The toolbar buttons and menu items in the Web browser are similar to those found in the Help browser display pane. For more information, see “View Documentation in the Help Browser” on page 4-19.

One feature of the Web browser not found in the Help browser is the **Location** field. In the Web browser, type a URL in the field to display that Web page.

Like any browser, the MATLAB Web browser might not support all of the HTML or related features used in a particular Web site or HTML page. For example, the MATLAB Web browser does not support the display of .bmp (bitmap) image files. Instead use .gif or .jpeg formats for image files.



## Internet Connection and Fonts for Web Browser—Web Preferences

To specify a proxy server to connect from the MATLAB Web browser to the Internet, use Web preferences. You might need to specify this preference if you have a firewall, for example. If you have a firewall and do not specify the proxy settings, links from the Web browser to URLs will not work.

Select **File -> Preferences -> Web**. By default, the check box **Use a proxy server to connect to the Internet** is not selected. This means you have a direct connection to the Internet.

To specify a proxy server, select the check box and specify the **Proxy host** and **Proxy port**. See your system administrator for the information you need to specify the proxy settings. As an example, 172.16.10.8 illustrates the format for host, and 3128 is the type of value you enter for port.

**Fonts for Web Browser.** To modify the font used in the Web browser, select **File -> Preferences -> Fonts**. The Web browser uses the font settings you specify for HTML Proportional Text tool. For more information about setting fonts, click the **Help** button in the preference panel for **Fonts**.

## Menus and Context Menus

### Merged Menus


When you use a tool in the desktop, its menu appears at the top of the desktop. When you work in a different tool in the desktop, you still use the menu at the top of the desktop, but the menu content changes to support that tool. When you undock a tool from the desktop, access its menu at the top of the undocked tool.

### Context Menus

Many of the features in MATLAB desktop tools are available from context menus, also known as pop-up or right-click menus. To access a context menu, right-click a selection or an area, or press **Ctrl+Shift+F10**. The context menu for the selection or tool appears, presenting the available actions. For example, following is the context menu for a selection in the Command History.


If a context menu does not appear, try right-clicking in a different part of the tool. When a context menu item is gray, the item does not apply to the current selection or area.

Access context (pop-up) menus by right-clicking a selection or any area in a tool.

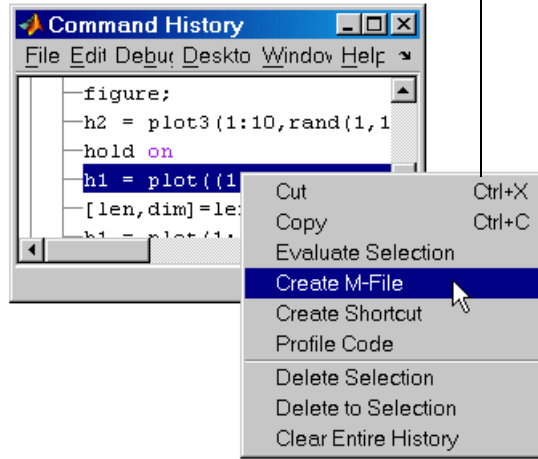

## Toolbars

The toolbar in the desktop provides easy access to frequently used operations. Position the cursor over a button for a second or two and a tooltip appears that describes the item.

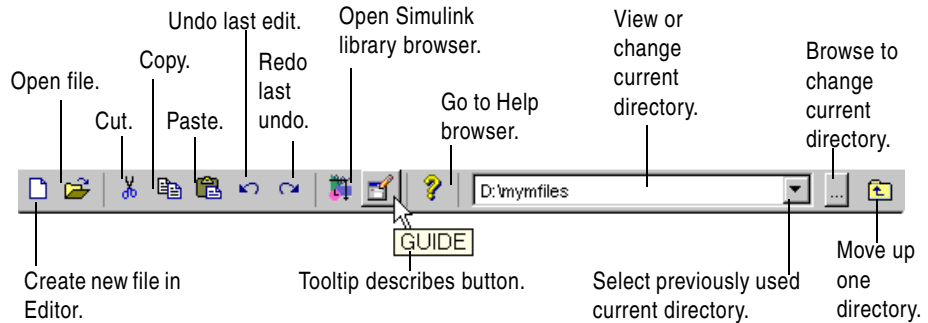


Some tools also have their own toolbars, which are located within the tool's own window. For example, the Current Directory browser has its own toolbar. When you undock one of these tools, the undocked tool includes the toolbar.

To hide a toolbar, or to show it again after hiding it, use the appropriate toolbar item in the **Desktop** menu. For figure windows, use the toolbar item in its **View** menu.


### Current Directory Field

The current directory field in the desktop toolbar shows the MATLAB current working directory. You can change the current directory using this field, using any of these methods:

- Type the current directory you want to change to directly in the field.
- Use the drop-down list to select a previously used current directory. To specify the number of entries maintained each session, use the **History** preference you access via **File -> Preferences -> Current Directory**.
- Use the browse button ... to select a new current directory.
- Use the up button  to move the current directory up one level.

The same current directory field also appears in the Current Directory browser when the Current Directory browser is undocked from the desktop. Use the Current Directory browser to perform many additional file operations. For more information, see “File Management Operations” on page 5-29.

Use drop-down list to view and select from previously used current directories.

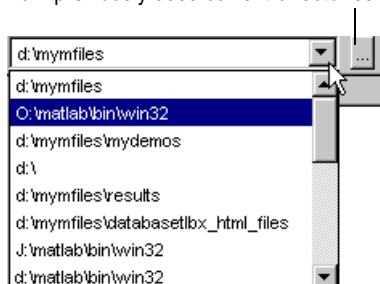

## Status Bar

Along the bottom of the desktop is the status bar. It displays messages, such as when MATLAB is busy executing statements or when the Profiler is on. Some tools, such as the Editor/Debugger, display additional status information, such as the current line number. Not all status information appears on the status bar—many MATLAB functions and tools provide status information that is not reported to the status bar.

You can construct your own functions to provide status information. See the timer function, and search for other specific terms describing the status of interest.

## Sizing, Arranging, and Sorting Columns in Tools

Some desktop tools present information in columns, such as the Current Directory browser.


To change the column width, drag the separator bar between two column headings in a tool. When a column is too narrow to show all the information in it, position the cursor over an item and the full value for that item displays like a tooltip.

To rearrange the columns in a tool, drag the column header to a different position. To sort the information by a particular column, click the column header. For example, in the Current Directory browser, click the **Last Modified** date to sort the items in date order. Some columns also allow you to reverse the sort order by clicking the column header again. A small gray arrow in the header indicates the current sort order—for example, an up arrow in the **Last Modified Date** column header indicates an ascending sort order, meaning the oldest files are at the top of the list.

Click a column heading to sort by that column. Click again to reverse the sort order.

To reorder columns, drag a column header, like **Description**, to another position.

Hold the cursor over a field to see the entire value for that column.

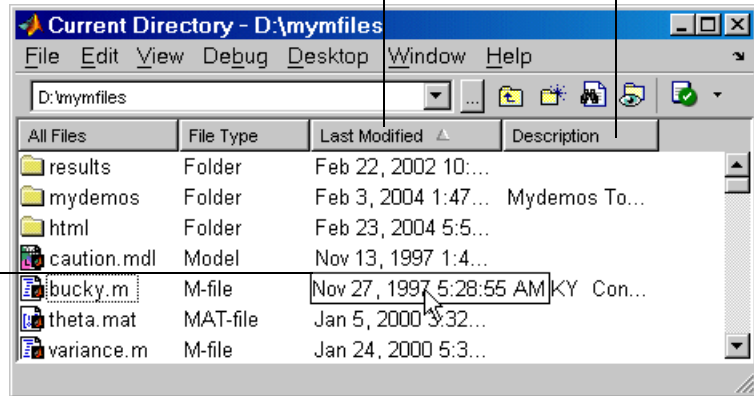

## Keyboard Shortcuts

You can access many of the menu items using shortcut keys (sometimes called accelerators) for your platform. For example, use **Ctrl+X** to perform a cut on Windows platforms. Many of the menu items show the shortcuts. Additional standard shortcuts for your platform usually work but only one is listed with each menu item.

The keyboard shortcuts for the Command Window and Editor/Debugger also depend on settings for key bindings that you specify using preferences. For details, see “Command Line Key Bindings” on page 3-29, and “Arrow and Control Keys (Shortcuts) in the Editor” on page 6-21. Instructions in the documentation specify shortcuts using the Windows **Ctrl** convention, but with Macintosh key bindings selected, you can use the Command key instead.

On Windows platforms, you can also use mnemonics, such as **Alt+F** to open the **File** menu. Mnemonics are listed with the menu item. For example, on the **File** menu the **F** in **File** is underlined, which indicates that **Alt+F** opens the menu. Note that some versions of Windows do not automatically show the mnemonics on the menu. For example, you might need to hold down the **Alt** key while the tool is selected in order to see the shortcuts on the menus. In Windows 2000, go to the **Display Control Panel**, select **Effects**, and clear the item **Hide keyboard navigation indicators until I use the Alt key**. See your Windows documentation for details.

Following are some general shortcuts that are not listed on menu items.

Key	Result
<b>Enter</b>	<p>The equivalent of double-clicking, it performs the default action for a selection. For example, press <b>Enter</b> while a statement in the Command History is selected to run that statement in the Command Window.</p> <p>For buttons in tools and dialog boxes, executes the default button (the button with a border around it). If there is no default button, press the <b>space bar</b> to execute the active button (the button with a dotted outline inside it). See “Default Button and Active Button (Button with Focus)” on page 2-38 for an illustration.</p>
<b>Escape</b>	<p>Cancels the current action. For example, if you select the <b>Edit</b> menu, the menu items display. Pressing <b>Escape</b> retracts the menu items. Pressing <b>Escape</b> in a dialog box is the same as selecting the <b>Cancel</b> button.</p>
<b>Ctrl+Tab</b>	<p>Moves to the next open tool in the desktop, or to the next open group of tools tabbed together.</p>
<b>Tab</b>	<p>Advances to the next button or field in a tool or dialog box. In the Command Window, completes a statement if the tab completion preference is selected.</p>

<b>Key</b>	<b>Result (Continued)</b>
<b>Alt+S</b>	Displays <b>Start</b> button menu (except on Macintosh platforms).
<b>Alt+Y</b>	Provides access to current directory field in toolbar.
<b>Space bar</b>	For buttons in tools and dialog boxes, activates the active button. See “Default Button and Active Button (Button with Focus)” on page 2-38 for an illustration of selecting default and active buttons using keys.
<b>+ or - or * on numeric keypad</b>	Use these keys on the numeric keypad to expand and collapse items in tree views. The Help browser <b>Navigator</b> pane and the Command History use tree views. Use <b>+</b> to expand the selected item, use <b>-</b> to collapse the selected item, and use <b>*</b> to recursively expand it, meaning open all items contained in the selected item.
<b>Ctrl+Shift+Tab</b>	Moves to the previous open tool or group of tabbed tools in the desktop.
<b>Ctrl+Page Down</b>	Moves to the next tool within a group of tools. In a group of documents, moves to next document.
<b>Ctrl+Page Up</b>	Moves to the previous tool within a group of tools tabbed together. In a group of documents, moves to previous document.
<b>Ctrl+F6</b>	Moves to the next tool or document (only for Windows and Solaris platforms).
<b>Ctrl+Shift+F6</b>	Moves to the next tool or document (only for Windows and Solaris platforms).
<b>Alt+F4</b>	Closes the desktop, thereby quitting MATLAB, or outside the desktop, closes the active window.


For additional shortcuts available in the various desktop tools, see the documentation for each tool. For example, in the Command Window, see “Keyboard Shortcuts in the Command Window” on page 3-16.

### Go To First Letter Feature in Desktop Tool Lists

In the Current Directory browser and Command History, you can type a letter to move directly to the next item in the list that starts with the letter you typed.

### Default Button and Active Button (Button with Focus)


These illustrations demonstrate the default versus active button in a dialog box.



The default button has a border around it. Here, **Save** is the default button. Press the **Enter** key to execute the default button.



The active button (the button with focus) has a dotted outline inside it. Here, **Cancel** is the active button. Press the **space bar** to execute the active button.



Here, the **Help** button is both the default button and the active button. In some cases, the default always changes to match the active button. You can press either **Enter** or the **space bar** to execute the **Help** button.

### Selecting Multiple Items

In many desktop tools, you can select multiple items and then select an action to perform on all the selected items. Select multiple items using the standard practices for your platform.

For example, if your platform is Windows, do the following to select multiple items:

- 1 Click the first item you want to select.
- 2 Hold the **Ctrl** key and then click the next item you want to select. Repeat this step until you have selected all the items you want. To select contiguous items, select the first item, hold the **Shift** key, and then select the last item.

Now you can perform an action on the selected items, such as delete.



## Cut, Copy, and Paste

You can cut and copy a selection from a desktop tool to the clipboard and then paste it from the clipboard into another tool or application. Use the **Edit** menu, toolbar, context menus, or standard keyboard shortcuts. For example, you can copy a selection of statements from the Command History and paste them into the desktop.

Use **Paste** to move items copied to the clipboard from other applications. The **Paste Special** item in the **Edit** menu opens the selection on the clipboard in the Import Wizard. You can use this to copy data from another application, such as Excel, into MATLAB. For details, see the Import Wizard documentation.

When editing text in the Command Window and Editor, select text and drag it to move the text to a new location. Press **Ctrl** and drag the selected text to copy it to a new location.

To undo the most recent cut, copy, or paste command, select **Undo** from the **Edit** menu. Use **Redo** to reverse the **Undo**. For some tools, you can undo multiple times in succession.

## Drag and Drop

You can also move or copy a selection from one tool to another by dragging the selection. For example, make a selection in the Command History and drag it to the Command Window, which pastes it there. Edit the lines in the Command Window, if needed, and then press the **Enter** key to run the lines from the Command Window. Another example is to drag a filename from the Current Directory browser to the Editor to open that file in the Editor. If you drag editable text, for example, text in the Editor, the text is cut rather than copied. Use **Ctrl** and drag to copy rather than cut editable text.

On Windows platforms, you can drag items from external applications into MATLAB. For example, dragging text from a Microsoft Word document into the Editor cuts and pastes it into the open file. Dragging an M-file from Windows Explorer to the Command Window runs the file.

## Page Setup Options for Printing

You can specify page setup options to be used when you print from the Command History, Workspace browser, and Array Editor. Select **File -> Page Setup**. A standard system page setup dialog box opens.

MATLAB provides special page setup options for printing from the Command Window and Editor. The setup options are essentially the same for both tools, with minor variations. This section covers


- “Specifying Page Setup Options” on page 2-40
- “Layout Options for Page Setup” on page 2-41
- “Header Options for Page Setup” on page 2-41
- “Fonts Options for Page Setup” on page 2-42

### Specifying Page Setup Options

To specify page setup options, perform these steps:

- 1 In the tool you want to print from, for example, the Command Window, select **File -> Page Setup**.

The **Page Setup** dialog box opens for that tool.

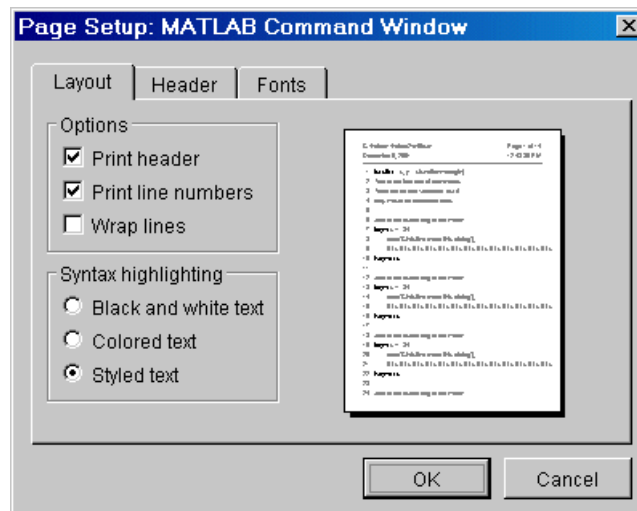

- 2 Click the **Layout, Header, or Fonts** tab in the dialog box and set those options for that tool, as detailed in subsequent sections.
- 3 Click **OK**.
- 4 After specifying the options, select **File -> Print** in the tool you want to print from, for example, the Command Window.

The contents from the tool are printed, using the options you specified in **Page Setup**.

### Layout Options for Page Setup

You can specify the following layout options. A preview area shows you the effects of your selections:

- **Print header**—Print the header specified in the **Header** tab.
- **Print line numbers**—Print line numbers.
- **Wrap lines**—Wrap any lines that are longer than the printed page width.
- **Syntax highlighting**—For keywords and comments that are highlighted in the Command Window, specify how they are to appear in print. Options are black and white text (that is, no highlighting), colored text (for use with a color printer), or styled text. For styled text, keywords appear in bold, comments appear in italics, and all other text appears in the normal style. Only keywords and comments you input are highlighted in the Command Window and in print; output is not highlighted.

### Header Options for Page Setup

If you want to print a header, select the **Layout** tab and on it, select **Print header**. Then select the **Header** tab and specify how the elements of the header are to appear. A preview area shows you the effects of your selections:

- **Page number**—Format for the page number, for example # of n
- **Border**—Border style for the header, for example, Shaded box
- **Layout**—Layout style for the header, for example, Standard one line includes the date, time, and page number all on one line

## Fonts Options for Page Setup

Specify the font to be used for the printed contents:

- 1** From **Choose font**, select the element, either Body or Header, where Body text is everything except the Header.
- 2** Select the font to use for that element. For example, select **Use Command Window font** for Body text if you want the printed text to be the same as the font that appears in the Command Window. This is the font specified in **File -> Preferences -> Fonts -> Custom** for the Command Window.
- 3** Repeat for the other element. If you did not select **Print header** on the **Layout** pane, you do not need to specify the Header font. As an example, for Header text, select **Use custom font** and then specify the font characteristics—type, style, and size. After you specify a custom font, the **Sample** area shows how the font will look.

## Accessing The MathWorks on the Web

You can access popular MathWorks Web pages from the MATLAB desktop. Select one of the following items from the **Help -> Web Resources** menu. For most items, the selected Web page then opens in your default system Web browser, for example, Netscape:

- **The MathWorks Web Site**—Home page of the MathWorks Web site (<http://www.mathworks.com>).
- **Products**—MathWorks Products page (<http://www.mathworks.com/products/>), with information about the full family of products.
- **Membership**—Access Login page (<http://www.mathworks.com/accesslogin/>) for Access Login members. If you are not a member, you can join online. Membership helps you stay up to date on the latest MATLAB developments.
- **Technical Support Knowledge Base**—MathWorks Support page (<http://www.mathworks.com/support>), where you can look for solutions to problems you are having, or report new problems.

- **MATLAB Central**—MATLAB Central Web site (<http://www.mathworks.com/matlabcentral/>) for the MATLAB user community. It includes MATLAB contest entries and results, a MATLAB screen saver, and these technical resources:
  - **MATLAB File Exchange**—Code library of files contributed by MathWorks customers and employees, available for free download and use with MathWorks products.
  - **MATLAB Newsgroup Access**—Provides access to the Usenet newsgroup for MATLAB and related products, `comp.soft-sys.matlab`, where you can post and answer questions, as well as view the archives.
- **MATLAB Newsletters**—Access to online versions of News and Notes and MATLAB Digest. News and Notes is published twice a year and contains feature articles, technical notes, and product information for MATLAB users. MATLAB Digest, an electronic bulletin consisting of technical notes, solutions, and timely announcements to the user community, is issued more frequently. See <http://www.mathworks.com/company/newsletters>.

### Check for Updates

This feature allows you to easily determine if more recent versions of your MathWorks products are available. Select **Help -> Check for Updates**. A dialog box appears, listing the version numbers of all MathWorks products installed on your system. Click **Check for Updates** in the dialog box, which accesses the MathWorks Web site and reports back for each product if a newer version is available or if your version is the latest.

## Fonts, Colors, and Other Preferences

Use preferences to change the font characteristics and the text and background colors for tools in the desktop.

- “Fonts Preferences for Desktop Tools” on page 2-44
- “Colors Preferences for Desktop Tools” on page 2-50
- “General Preferences for MATLAB” on page 2-54

Each tool also has its own set of preferences. For details, see “About Preferences” on page 2-56.


### Fonts Preferences for Desktop Tools

Use desktop font preferences to specify the font characteristics for MATLAB desktop tools. The font characteristics are

- Type, for example, SansSerif
- Style, for example, bold
- Size in points, for example, 12 point

Select **File -> Preferences -> Fonts** to set fonts for desktop tools. You can set some font options differently for printing—see “Page Setup Options for Printing” on page 2-40.

With the code and text font styles, you can easily apply the same font to all tools that display code or text, respectively.

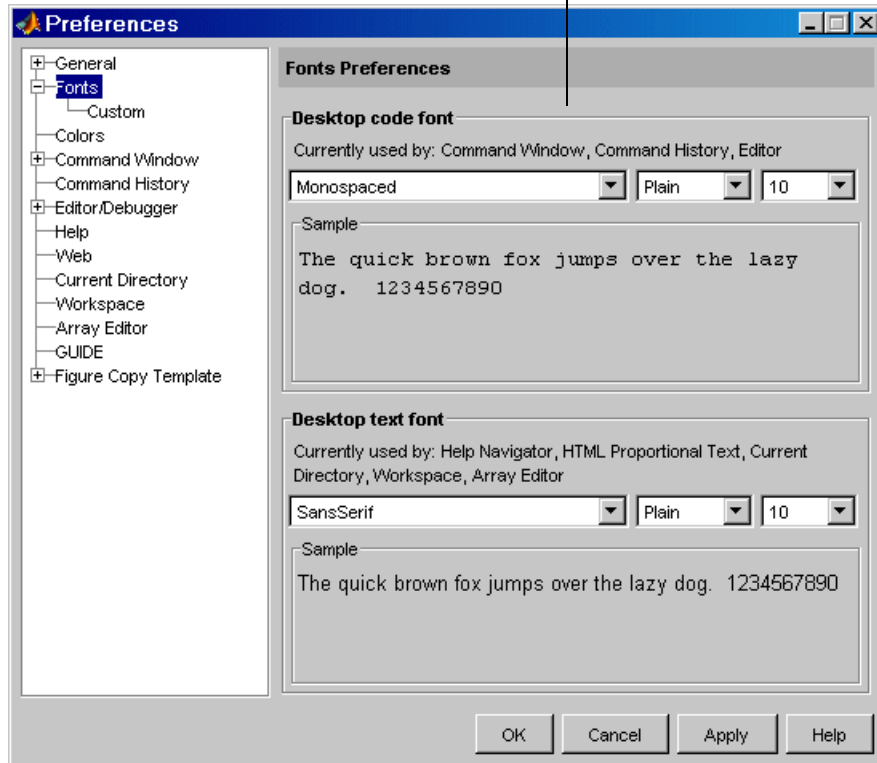


### Desktop Code Font and Desktop Text Font


You specify separate font characteristics for tools that primarily display code (**Desktop code font**), such as the Command Window, and tools that primarily display text (**Desktop text font**), such as the Current Directory browser. Many users prefer that code display in a monospace font to provide better alignment, and prefer a more narrow font style for text information. With the desktop code font preference, you set just one preference to apply a monospace style to all tools that display code. Similarly, you can set just one preference to apply a text font to all desktop tools that display text.

The following illustrations show how the Editor would look using a monospace font or a proportional font. Note that a monospaced font is useful when you care about alignment, but a proportional font might use less space.

With a monospace font, all characters are the same width. Here, the font is 10 pt. Monospaced. Note the 10th character in each line aligns with the Editor's right-hand text limit, which is set to column 10.

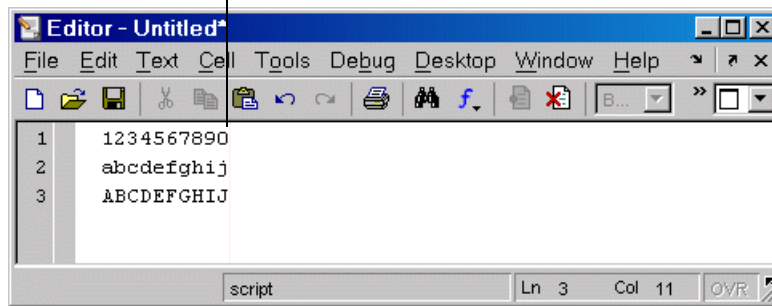

With a proportional font, characters are different widths. Here, the font is 10 pt. SansSerif. Each line contains 10 characters but none ends at the same column. The Editor's right-hand text limit is not relevant.

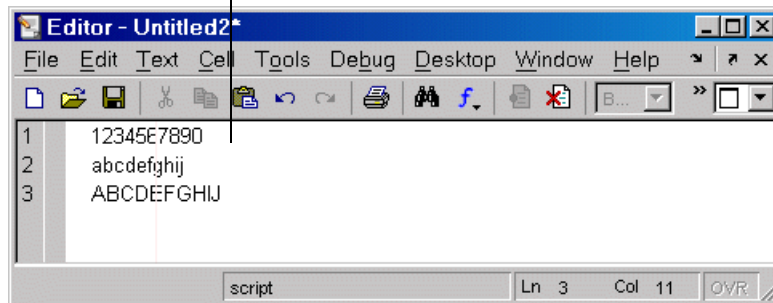

**Default Font Settings.** Default settings are listed in the following table. Note that Lucida Console approximates the fixedsys font available in earlier versions of MATLAB.



Font Type	Default Characteristics and Sample	Tools Using Font Type by Default
<b>Desktop code font</b>	Monospaced, Plain, 10 point  Sample code font	<ul style="list-style-type: none"> <li>• Command Window</li> <li>• Command History</li> <li>• Editor/Debugger</li> </ul>
<b>Desktop text font</b>	SansSerif, Plain, 10 point  Sample text font	<ul style="list-style-type: none"> <li>• Help Navigator</li> <li>• HTML Proportional Text. This is the font used for noncode text in the Web browser (including, for example, Cell publishing HTML reports), Profiler, and Help browser display pane.</li> <li>• Current Directory browser</li> <li>• Workspace browser</li> <li>• Array Editor</li> </ul>

When you change a font characteristic for **Desktop code font**, the characteristic takes effect for all tools that use the desktop code font. The same is true when you change a font characteristic for **Desktop text font**.

After changing a characteristic, a sample in the dialog box shows how it will look. Click **Apply** or **OK** to make the change take effect in the desktop tools.


### See Also

“About Preferences” on page 2-56.

### Custom Fonts Preferences

You can specify that a tool use the code font, the text font, or a different font. Select **File -> Preferences -> Fonts**. Click **+** and select **Custom**. The **Fonts Custom Preferences** panel appears.

Use custom fonts preferences to specify the tools that use the code style font and the tools that use the text style font. You can also apply a custom font to any tool.

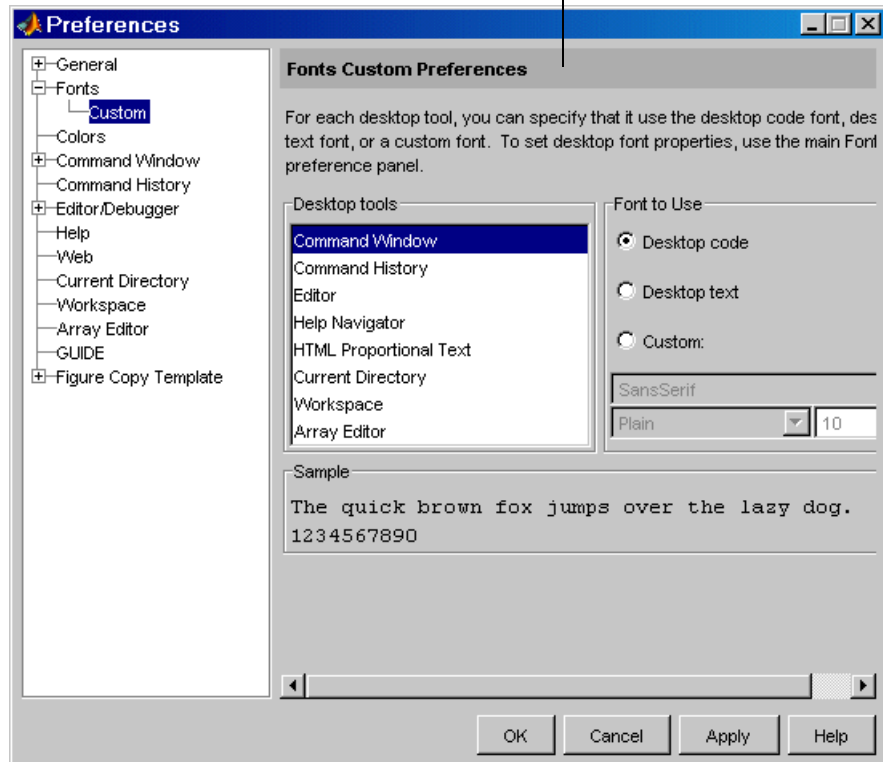

Select a tool from the **Desktop tools** list. The type of font it uses, code or text, appears under **Font to Use**. In the illustration shown, the Command Window uses the **Desktop code font**, which is defined in the **Fonts** panel as described in the previous section.

To change the font type the selected tool uses, select a different radio button. For **Custom**, you then specify the font characteristics for that tool.

## Changing the Font—Example

This example changes the default settings (p. 2-20) for the desktop code font, changes the Command History preference so that it uses the desktop text font instead of code, and specifies a custom font for the Current Directory browser:

- 1** Change the characteristics for the desktop code font. On the **Fonts** pane, set the **Desktop code font** to Times New Roman, Plain, 14 point. Use the default for the **Desktop text font**, SansSerif, Plain, 10 point. Click **Apply**.
- 2** Make the Command History use the desktop text font. Select **Fonts**, click **+**, select **Custom**, and then select Command History from **Desktop tools**. Select the **Desktop text** radio button.
- 3** Apply a custom font to the Current Directory browser. Select Current Directory from **Desktop tools**. Select the **Custom** radio button. Select Arial Narrow and Plain, and type 11 in the size field. Click **OK**.

The following table details the results of the changes.

<b>Tool</b>	<b>Font Type</b>	<b>Font Characteristics</b>
Command Window	Desktop code	Times New Roman, Plain, 14 point
Command History	Desktop text	SansSerif, Plain, 10 point
Editor	Desktop code	Times New Roman, Plain, 14 point
Help Navigator	Desktop text	SansSerif, Plain, 10 point
HTML Proportional Text	Desktop text	SansSerif, Plain, 10 point
Current Directory	Custom	Arial Narrow, Plain, 11 point
Workspace	Desktop text	SansSerif, Plain, 10 point
Array Editor	Desktop text	SansSerif, Plain, 10 point


**See Also.** For help about how MATLAB stores preferences and help for other preferences, see “About Preferences” on page 2-56.

## Colors Preferences for Desktop Tools

Desktop color preferences specify the colors used in MATLAB desktop tools and the colors that convey syntax highlighting. Select **File -> Preferences -> Colors** to set color preferences for desktop tools. You can set some color options differently for printing—see “Page Setup Options for Printing” on page 2-40.

To set colors for text and the background, clear the **Use system colors** check box and then select colors from the palettes.

The **Sample** area shows how the changes will look.

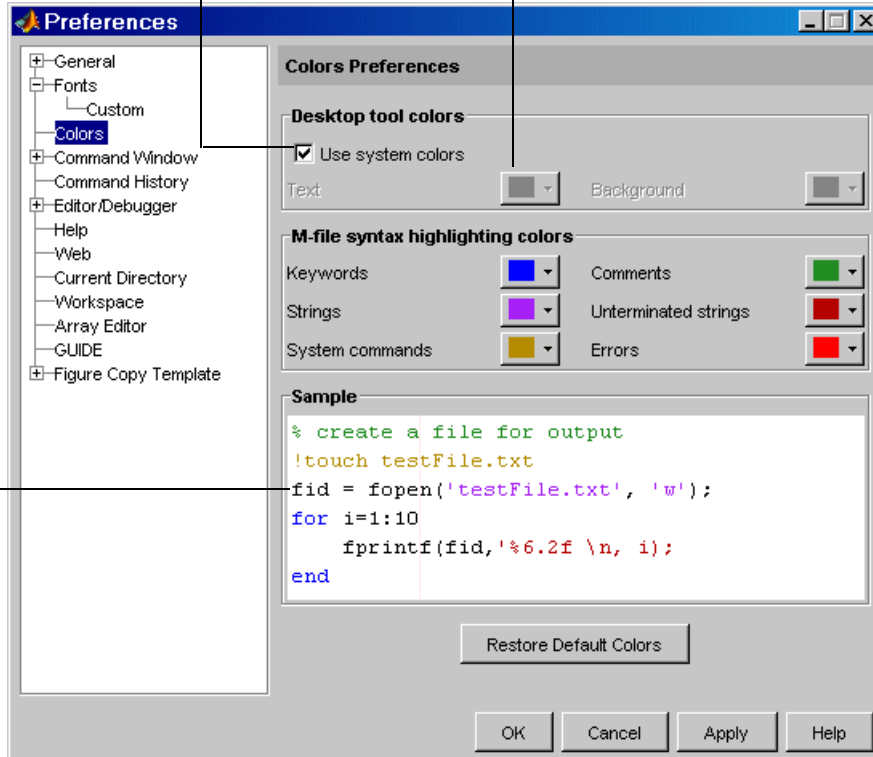

## Desktop Tool Colors

Use desktop tool colors to change the color of the text and background in the desktop tools. Select the check box **Use system colors** if you want the desktop to use the same text and background colors that your platform (for example, Windows) uses for other applications,.

To specify different text and background colors, follow these steps:

- 1 Clear the **Use system colors** check box.
- 2 Click the arrow next to the **Text** color and choose a new color from the palette shown.

When you choose a color, the **Sample** area in the dialog box updates to show you how it will look.


- 3 Click the arrow next to the **Background** color and choose a new color.

If you use a gray background color, a selection in an inactive window will not be visible.

- 4 Click **Apply** or **OK** to see the changes in the desktop tools.

Click **Restore Default Colors** to return to the default settings for desktop tool colors, as well as for syntax highlighting colors.

The following illustration shows how the Current Directory browser looks with blue-green text and a beige background. These colors are only discernible in the online version of this documentation.

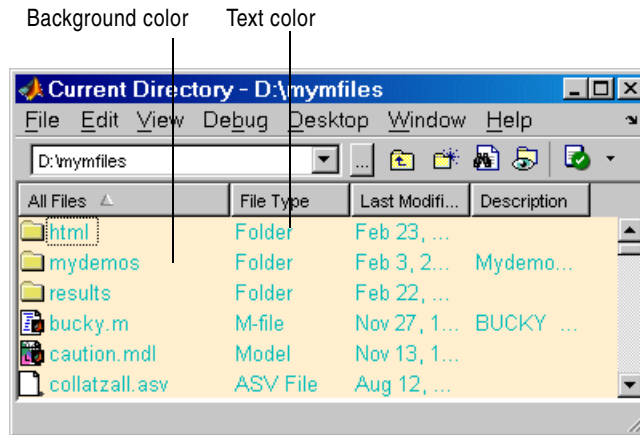


## Syntax Highlighting Colors

In the Command Window, Command History, Editor/Debugger, and Shortcuts callback area, MATLAB conveys syntax information via different colors to help you easily identify elements, such as `if/else` statements. This is known as syntax highlighting.

In the Command Window, only input you type is highlighted; output from running MATLAB functions is not highlighted. In the Editor/Debugger, you can specify syntax highlighting for use with files in C/C++, Java, and HTML. For details, see the topic “Language Preferences” in the online documentation.

Use preferences to specify the syntax highlighting colors. When you choose a color, the **Sample** area in the dialog box updates to show you how it will look.

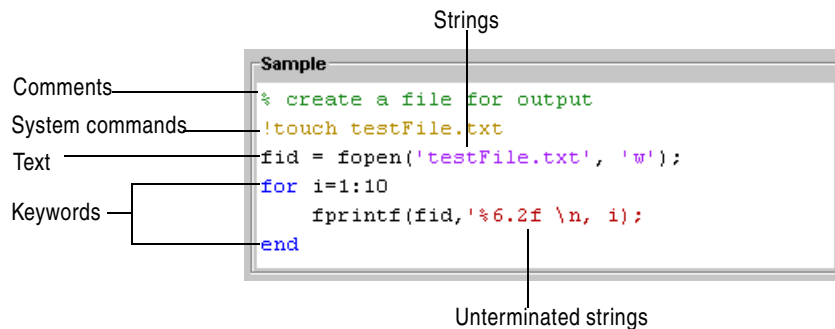

The default colors are listed here:

- **Keywords**—Flow control functions, such as `for` and `if`, as well as the continuation ellipsis (`...`), are colored blue.
- **Comments**—All lines beginning with a `%`, designating the lines as comments in MATLAB, are colored green. Similarly, the block comment symbols, `%{` and `%}`, as well as the code in between, appear in green. Text following the continuation ellipsis on a line is also green because it is a comment.
- **Strings**—Type a string and it is colored maroon. When you complete the string with the closing quotation mark (`'`), it becomes purple. Note that for functions you enter using command syntax instead of function syntax, the arguments are highlighted as strings. This is to alert you that in command notation, variables are passed as literal strings rather than as their values. For more information, see “MATLAB Command Syntax” in the MATLAB Programming documentation.
- **Unterminated strings**—A single quote without a matching single quote, and whatever follows the quote, are colored maroon. This might alert you to a possible error.
- **System commands**—Commands such as the `!` (shell escape) are colored gold.
- **Errors**—Error text is colored red.


Click **Restore Default Colors** to return to the default settings for syntax highlighting colors as well as desktop tool colors.

## See Also

For help about how MATLAB stores preferences and help for other preferences, see “About Preferences” on page 2-56.

## General Preferences for MATLAB

These preferences apply to all relevant tools in MATLAB.

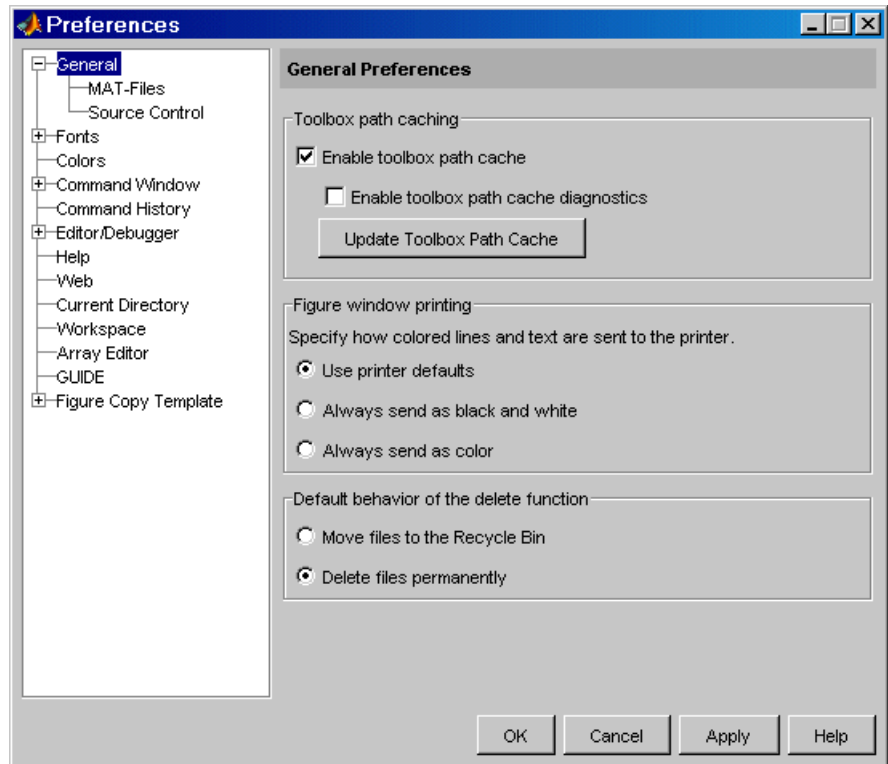

## Toolbox Path Caching Preference

See “Toolbox Path Caching in MATLAB” on page 1-10.



## Figure Window Printing

Select an option regarding color printing for figures. For more information on printing figures, see the topic “Printing Graphics” in the online documentation.

## Default Behavior of the Delete Function

Files you delete using the `delete` function are permanently deleted by default. There is no opportunity to retrieve them.

You can use this preference to instead move deleted files to the Recycle Bin on Windows, to the Trash Can on Macintosh, or to a `tmp` directory on UNIX platforms. Then, you can recover any accidentally deleted files from these locations. Deleted files in these locations are not automatically removed; you must remove them using operating system features, such as **Empty Recycle Bin** on Windows. When you select this preference, `delete` might run slower.

**Function alternative.** This MATLAB preference actually sets the state of the `recycle` function upon startup and when you change the preference. You can override the behavior of the preference by setting the `recycle` function state. For example, regardless of the preference setting, when you run

```
recycle('off')
delete('thisfile.m')
```

MATLAB permanently removes `thisfile.m` from the current directory. Files you subsequently remove using `delete` are also permanently removed, unless you reapply the preference to `recycle` or run `recycle('on')`. Regardless of the state of the `recycle` function during the current session, when you next start MATLAB, the setting for the preference is honored. For more information, see the `recycle` and `delete` reference pages.

Note that this preference and the `recycle` function do not apply to files you delete using the Current Directory browser. For more information, see “Cutting or Deleting Files and Directories” on page 5-35.

## See Also

For help about how MATLAB stores preferences and help for other preferences, see “About Preferences” on page 2-56.

## **MAT-Files**

The **MAT-file save options** apply when you use the save function and the **Save** menu items (for MAT-files) in desktop tools.

By default, MATLAB compresses the data when saving a MAT-file, thereby reducing the storage space required. When you load the MAT-file, MATLAB automatically uncompresses the data. In addition, MATLAB uses Unicode encoding for strings when you save a MAT-file, making the data accessible to other MATLAB users, regardless of the default character encoding scheme used by their systems.

Prior releases of MATLAB did not save compressed MAT-files. They also did not use Unicode character encoding, which sometimes prevented the exchange of MAT-files among users, particularly when they used localized systems.

The default preference for saving prevents you from using the MAT-files with MATLAB Version 6 or 6.x. To save MAT-files for use with a previous version, select the preference **Ensure backward compatibility (-v6)**. Alternatively, you can override the preference by using the save function with the **-v6** option, which, for occasional use, might be more convenient than the changing the preference. For more information, see the save reference page.

## **Source Control**

Specify the source control system you want to interface MATLAB to. For more information, see Chapter 9, “Source Control.”

## **About Preferences**

Use preferences to specify options for each desktop tool. To access preferences:

- 1** Select **File -> Preferences**.
- 2** In the left pane of the **Preferences** dialog box, preferences appear for MATLAB tools as well as for any other MathWorks products installed on your system.

Choose a tool and click the **+** to display more preferences for that tool. From the expanded list, select the entry you want. The right pane shows the preferences for that item.

- 3 Change settings. Click **Apply** or **OK** to set the preferences. Preferences take effect immediately. They remain persistent across MATLAB sessions.

Note that some tools allow you to control these settings from within the tool without setting a preference—use that method if you only want the change to apply to the current session.

### Function Alternative

Open the preferences dialog box using the preferences function.

### Preferences File, `matlab.prf`

Preferences are stored in a preferences file, `matlab.prf`. Type `prefdir` in the Command Window to see the location of the file.

On Macintosh platforms, the directory might be in a hidden folder, for example, `myname/.matlab/R14`. To access the directory, select **Go -> Go to Folder** in the Mac OS Finder. In the resulting dialog box, type the path returned by `prefdir` and press **Enter**. The `matlab.prf` file is loaded when MATLAB starts and is overwritten when you close MATLAB.

When you install a new version of MATLAB, it tries to use your existing preferences from the previous version, where possible. To return to default preferences, delete `matlab.prf` in the directory for the current version, R14, as well as in the directories for previous versions, for example, R13.

## Summary of Preferences

Preference	What You Can Specify
General Preferences	Toolbox path caching, figure window printing, delete function behavior, MAT-file save formats, and source control.
Fonts	Font type, style, and size for desktop tools. Customize for any tool.
Colors	Colors for text, background, and syntax highlighting in desktop tools.
Command Window	Numeric format and display, key bindings, tab size, and tab completion.
Command History	Display, filtering, and saving.
Editor/Debugger	Editor type, startup options, display, keyboard, indenting, language, publishing, and autosave.
Help	Product filter and synchronization.
Web	Internet proxy server settings.
Current Directory	Number of entries in history and display options.
Workspace	Confirm deletion of variables.
Array Editor	Numeric format and use of <b>Enter</b> key.
GUIDE	Display options.
Figure Copy Template	Application, text, line, uicontrols, axis, format, background color, and size.
Other Products	Preferences for other installed MathWorks products.

# Running Functions— Command Window and History

---

If you are using the Help browser, watch the Desktop and Command Window video demo and the Command History video demo for an overview of the major functionality. The Command Window is where you run MATLAB statements, while the Command History is a log of the statements you have run.

Opening the Command Window (p. 3-2)	Access the Command Window.
Running Functions and Programs, and Entering Variables (p. 3-3)	Enter statements at the prompt. Run M-files, interrupt programs, run external programs, and examine errors. Evaluate and open selections.
Controlling Input (p. 3-8)	Includes case sensitivity, long statements, syntax highlighting, editing, and keyboard shortcuts.
Controlling Output (p. 3-18)	Covers suppressing and paging output, printing, and saving a session.
Searching in the Command Window (p. 3-22)	Use the <b>Find</b> dialog or incremental search features to find content in the Command Window.
Preferences for the Command Window (p. 3-27)	Specify options for text, display, the keyboard, and indenting.
Command History (p. 3-30)	View session histories. Run statements, copy entries, search, and print the history. Set preferences.
Preferences for Command History (p. 3-37)	Specify how often to automatically save the history file and the types of statements to exclude.


## Opening the Command Window

The Command Window is one of the main tools you use to enter data, run MATLAB functions and scripts, and display results. If you are using the Help browser, watch the Desktop and Command Window video demo for an overview of the major functionality.

When the Command Window is not open, select **Command Window** from the **Desktop** menu. Alternatively, open the Command Window with the `commandwindow` function.

If you prefer a simple command line interface without the other MATLAB desktop tools, select **Desktop -> Desktop Layout -> Command Window Only**. For more information about arranging tools, see “Arranging the Desktop—Overview” on page 2-5.

The prompt, `>>`, is where you enter functions. The prompt indicates that MATLAB is ready to accept input from you. When you see the prompt, you can enter a variable or run a function. This prompt is also known as the command line.

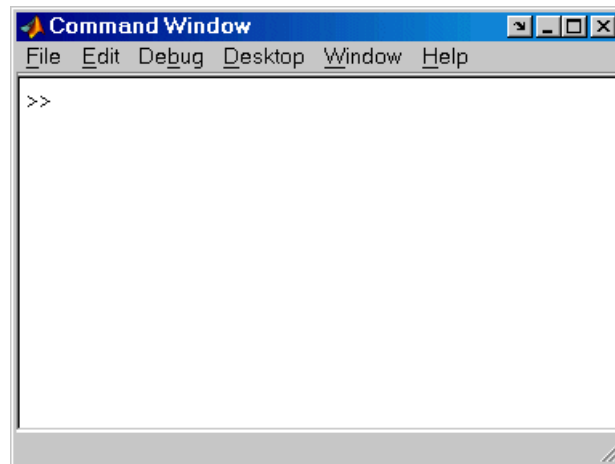

When MATLAB displays the `K>>` prompt in the Command Window, it indicates MATLAB is in debug mode. Type `dbquit` to return to normal mode. For more information, see “Editing and Debugging M-Files” on page 6-1.

MATLAB displays the `EDU>>` prompt for the MATLAB Student Version.

## Running Functions and Programs, and Entering Variables

- “Running Statements at the Command Line Prompt” on page 3-3
- “Running External Programs” on page 3-6
- “Evaluating or Opening a Selection” on page 3-6
- “Hyperlinks for Running Functions” on page 3-7

### Running Statements at the Command Line Prompt

- “Entering Variables and Running Functions” on page 3-3
- “Examining Errors” on page 3-4
- “Running M-Files” on page 3-5
- “Processing Order” on page 3-5
- “Interrupting a Running Program” on page 3-5

### Entering Variables and Running Functions

At the prompt, enter data and run functions. For example, to create A, a 3-by-3 matrix, type

```
A = [1 2 3; 4 5 6; 7 8 10]
```

When you press the **Enter** or **Return** key after typing the line, MATLAB responds with

```
A =  
  
     1     2     3  
     4     5     6  
     7     8    10
```


To run a function, type the function including all arguments and press **Enter** or **Return**. All of the information you type before pressing **Enter** or **Return** is known as a statement. MATLAB displays the result. For example, type

```
magic(2)
```

and MATLAB returns

```
ans =  
    1     3  
    4     2
```

When you enter program control statements, such as `if ... end`, the prompt does not appear until you complete the set of statements. In the following example, you press **Enter** at the end of each line, but the prompt does not appear until you complete the set of statements with `end`.

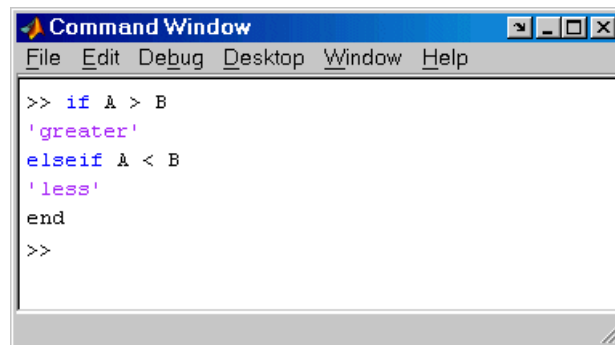

```
Command Window  
File Edit Debug Desktop Window Help  
>> if A > B  
    'greater'  
elseif A < B  
    'less'  
end  
>>
```

To display each function in a function or M-file as it executes, run `echo on`. For details, see the `echo` reference page.

### Examining Errors

If an error message appears when you run an M-file, click the underlined portion of the error message, or position the cursor within the filename and press **Ctrl+Enter**. The offending M-file opens in the Editor, scrolled to the line containing the error.



## Running M-Files

Run M-files, files that contain code in the MATLAB language, the same way that you would run any other MATLAB function. Type the name of the M-file in the Command Window and press **Enter** or **Return**. The M-file must be in the MATLAB current directory or on the MATLAB search path—for details, see “Search Path” on page 5-18. You can also use the run function and specify the full pathname to an M-file script.

To determine the name of the M-file currently running, use `mfilenam`.

## Processing Order

In MATLAB, you can only run one process at a time. If MATLAB is busy running one function, any further statements you issue are buffered in a queue. The next statement will run when the previous one finishes.

## Interrupting a Running Program

You can stop a running program by pressing **Ctrl+C** or **Ctrl+Break** at any time. On Macintosh platforms, you can also use **Command+.** (**Command** key and the period key) to stop the program. For certain operations, this might generate errors in the Command Window.

For M-files that run for a long time, or that call built-ins or MEX-files that take a long time, **Ctrl+C** does not always effectively stop execution. In that event, include a `drawnow` command in your M-file, for example, within a large loop. Note that **Ctrl+C** might be less responsive if you started MATLAB with the `-nodesktop` option.

### Running External Programs

The exclamation point character, `!`, is a *shell escape* and indicates that the rest of the input line is a command to the operating system. Use it to invoke utilities or call other executable programs without quitting MATLAB. On UNIX, for example,

```
!vi yearlstats.m
```

invokes the vi editor for a file named `yearlstats.m`. After the external program completes or you quit the program, the operating system returns control to MATLAB. On the PC, add `&` to the end of the line, such as

```
!dir &
```

to display the output in a separate window or to run the application in background mode. For example

```
!excel.exe &
```

opens Excel and returns control to the Command Window so you can continue running MATLAB statements.

See the functions `unix`, `dos`, and `system` to run external programs that return results and status.

### Evaluating or Opening a Selection

Make a selection in the Command Window and press **Enter** or **Return**. The selection is appended to whatever is at the prompt and MATLAB executes it.

You can select a statement from any MATLAB desktop tool, right-click, and select **Evaluate Selection** from the context menu. Alternatively, after making a selection, press **Enter** or **Return**. For example, you can scroll up in the Command Window, select a statement you entered previously, and then press **Enter** or **Return** to run it. You cannot evaluate a selection while MATLAB is busy, for example, running an M-file.

You can open a function, file, variable, or Simulink® model from the Command Window. Select the name in the Command Window, and then right-click and select **Open Selection** from the context window. This runs the open function for the item you selected so that it opens in the appropriate tool:

- M-files and other text files open in the Editor.
- Figure files (.fig) open in a figure window.
- Variables open in the Array Editor.
- Models open in Simulink.

See `open` for details about what action occurs if there are name conflicts. If no action exists to work with the selected item, **Open selection** calls `edit`.

### Function Alternative

Use `open` or `edit` to open a file in the Editor. Use `type` to display the M-file in the Command Window.

## Hyperlinks for Running Functions

Use `matlab:` to run a specified statement when you click a hyperlink in the Command Window. For example

```
disp(' <a href="matlab:magic(4)">Generate magic square</a>')
```

displays

[Generate magic square](#)

When you click the link `Generate magic square`, MATLAB runs `magic(4)`. Alternatively, you can press **Ctrl+Enter** if the cursor is positioned in the link text. You can use the `disp`, `error`, `fprintf`, or `warning` function with this feature. For more information, including examples, see the `matlabcolon` (`matlab:`) reference page.

## Controlling Input

- “Case and Space Sensitivity” on page 3-8
- “Syntax Highlighting” on page 3-9
- “Cut, Copy, Paste, and Undo Features” on page 3-10
- “Enter Multiple Lines Without Running Them” on page 3-10
- “Entering Multiple Functions in a Line” on page 3-11
- “Entering Long Statements” on page 3-11
- “Recalling Previous Lines” on page 3-12
- “Tab Completion” on page 3-12
- “Keyboard Shortcuts in the Command Window” on page 3-16
- “Navigating Above the Command Line” on page 3-17

## Case and Space Sensitivity

- “Uppercase and Lowercase for Variables” on page 3-8
- “Uppercase and Lowercase for Files and Functions” on page 3-8
- “Spaces in Expressions” on page 3-9

### Uppercase and Lowercase for Variables

With respect to case, MATLAB requires an exact match for variable names. For example, if you have a variable `a`, you cannot refer to that variable as `A`.

### Uppercase and Lowercase for Files and Functions

With respect to functions, filenames, objects, and classes on the search path or in the current directory, MATLAB prefers an exact match with regard to case. MATLAB runs a function if you do not enter the function name using the exact case, but displays a warning the first time you do this. The warning text includes instructions for how to suppress the warning.

To avoid ambiguity and warning messages, always match the case exactly. It is a best practice to use lowercase only when running and naming functions. This is especially useful when you run on Windows and UNIX platforms because their file systems behave differently with regard to case.

Note that if you use the help function, function names are shown in all uppercase, for example, PLOT, solely to distinguish them. Some functions for interfacing to Java actually used mixed case and the M-file help and documentation accurately reflect that.

**Examples.** The directory `first` is at the top of the search path and contains the file `A.m`. You type `a` instead of `A`. MATLAB runs `A.m` but issues a warning. When you type `a` again during that session, MATLAB runs `A.m` but does not show the warning.

Add the directory `second` after `first` on the search path, with the file `a.m` in `second`. The directory `first` contains `A.m`, while `second` contains `a.m`. Type `a`. On UNIX platforms, MATLAB runs `a.m` but does not display a warning. On Windows platforms, MATLAB runs `a.m` but displays a warning the first time you do this. As noted in the warning message, you can suppress the warning by running

```
warning off ...
MATLAB:dispatcher:CaseInsensitiveMatchPrecedesExactMatch
```

Include the statement in your `startup.m` file if you never want to see this warning message.

### Spaces in Expressions

Blank spaces around operators such as `-`, `:`, and `( )`, are optional, but they improve readability. For example, MATLAB interprets the following statements the same way.

```
y = sin (3 * pi) / 2
y=sin(3*pi)/2
```

### Syntax Highlighting


Some entries appear in different colors to help you better find elements, such as matching `if/else` statements. This is known as syntax highlighting. You can change the colors using preferences. Note that output does not appear with syntax highlighting, except for errors. For more information, see “Colors Preferences for Desktop Tools” on page 2-50.

Default colors are shown here—to change them, use **Preferences -> Colors**.

Keywords, like these for program control, are blue.

Closed strings are purple.

Unclosed strings are maroon.

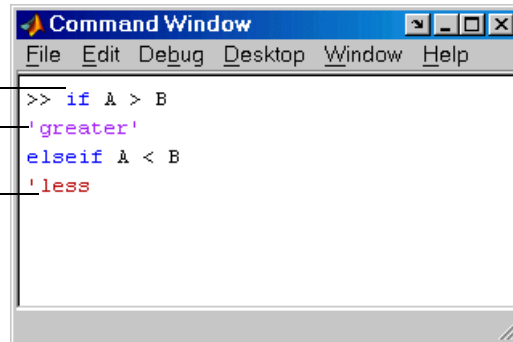

```
Command Window
File Edit Debug Desktop Window Help
>> if A > B
    'greater'
elseif A < B
    'less'
```

## Cut, Copy, Paste, and Undo Features

Use the **Cut**, **Copy**, **Paste**, **Undo**, and **Redo** features from the **Edit** menu when working in the Command Window. You can also access some of these features in the context menu for the Command Window.

**Undo** applies to some of the actions listed in **Edit** menu. You can undo multiple times in succession until there are no remaining actions to undo. Select **Edit -> Redo** to reverse an undo.

In a multiline set of statements containing keywords, such as `if ... end`, you cannot edit a line after entering it, even though you have not completed the flow. Use **Ctrl+C** to end the flow, and then enter the statements again. Use **Shift+Enter** instead of **Enter** at the end of each line so that you can edit the lines before completing the flow.

## Enter Multiple Lines Without Running Them

To enter multiple lines before running any of them, use **Shift+Enter** or **Shift+Return** after typing a line. MATLAB does not run the line, the cursor moves down to the next line, and no prompt displays but you can type the next line. Continue for more lines. Then press **Enter** or **Return** to run all of the lines.

This allows you to edit any of the lines you entered before you pressing **Enter** or **Return**.

## Entering Multiple Functions in a Line

To enter multiple functions on a single line, separate the functions with a comma ( , ) or semicolon ( ; ). Using the semicolon instead of the comma will suppress the output for the command preceding it. For example, put three functions on one line to build a table of logarithms by typing

```
format short; x = (1:10)'; logs = [x log10(x)]
```

and then press **Enter** or **Return**. The functions run in left-to-right order.

## Entering Long Statements

If a statement does not fit on one line, enter three periods ( . . . ), also called dots, stops, or an ellipsis, at the end of the line to indicate it continues on the next line. Then press **Enter** or **Return**. Continue typing the statement on the next line. You can repeat the ellipsis to add a line break after each line until you complete the statement. When you finish the statement, press **Enter** or **Return**.

For items in single quotation marks, such as strings, you must complete the string in the line on which it was started. For example, typing

```
headers = ['Author Last Name, Author First Name, ' ...
'Author Middle Initial']
```

results in

```
headers =
Author Last Name, Author First Name, Author Middle Initial
```

MATLAB produces an error when you do not complete the string, so you could not continue the statement as shown here.

```
headers = ['Author Last Name, Author First Name, ...
Author Last Name']

??? headers = ['Author Last Name, Author First Name, ...
Error: Missing variable or function.
```

Note that MATLAB ignores anything appearing after the . . . on a line, and continues processing on the next line. This effectively creates a comment out of the text following the . . . on a line. For more information, see “Commenting Out Part of a Statement” on page 6-17.

## Recalling Previous Lines

Use the arrow, tab, and control keys on your keyboard to recall, edit, and reuse functions you typed earlier. For example, suppose you mistakenly enter

```
rho = (1+ sqrt(5))/2
```

Because you misspelled `sqrt`, MATLAB responds with

```
Undefined function or variable 'sqrt'.
```

Instead of retyping the entire line, press the up arrow  $\uparrow$  key. The previously typed line is redisplayed. Use the left to move the cursor, then add the missing `r`, and press **Enter** or **Return** to run the line. Repeated use of the up arrow key recalls earlier lines, from the current and previous sessions. Using the up arrow, you can recall any line maintained in the Command History window.

Similarly, specify the first few characters of a line you entered previously and press up arrow to recall the previous line. For example, type the letters `p1o` and then press the up arrow key. This displays the last line that started with `p1o`, as in the most recent `plot` function. Press the up arrow key again to display the next most recent line that began with `p1o`, and so on. Then press **Enter** or **Return** to run the line. This feature is case sensitive.

Another way to view and access commands from the current and previous MATLAB sessions is with the Command History.

## Tab Completion

MATLAB helps you automatically completes the name of a function on the search path, filename, variable, structure, or Handle Graphics property if you type the first few characters and then press the **Tab** key. To use tab completion, you must have the tab completion preference selected. For details, see “Keyboard and Indenting Preferences for the Command Window” on page 3-29.

The examples explain how to use tab completion:

- “Basic Example—Unique Completion” on page 3-13
- “Multiple Possible Completions” on page 3-13
- “Tab Completion for Directories and Filenames” on page 3-14
- “Tab Completion for Structures” on page 3-14
- “Tab Completion for Properties” on page 3-15



### Basic Example—Unique Completion

This example illustrates a basic use for tab completion. After creating a variable, `costs_march`, type

```
costs
```

and press **Tab**. MATLAB automatically completes the name, displaying

```
costs_march
```

Then complete the statement, adding any arguments and options, and press **Return** or **Enter** to run it. In this example, if you just press **Enter**, MATLAB displays the contents of `costs_march`. If MATLAB does not complete the name `costs_march` but instead moves the cursor to the right, you do not have the preference set for tab completion.

You can also use tab completion anywhere in the line, not just at the beginning. For example, if you type

```
a = cost
```


and press **Tab**, MATLAB completes `costs_march`.

### Multiple Possible Completions

If there is more than one name that starts with the characters you typed, when you press the **Tab** key, MATLAB displays a list of all names that start with those characters. For example, type

```
cos
```

and press **Tab**. MATLAB displays

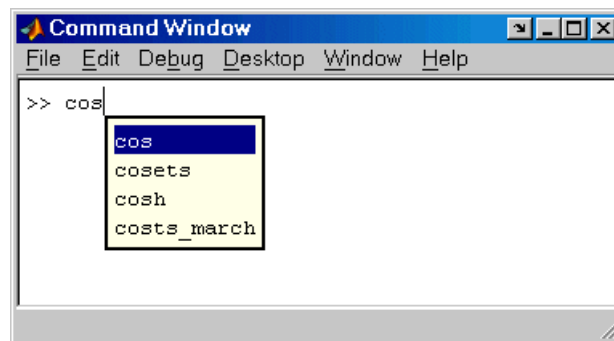

The resulting list of possibilities includes the variable name you created, `costs_march`, but also includes functions that begin with `cos`, including `cosets` from the Communications Toolbox.

Continue typing to make your entry unique. For example, type the next character, such as `t` in the example. MATLAB selects the first item in the list that matches what you typed, in this case, `costs_march`. Press **Enter** or **Return** to select that item to complete the name at the prompt. In the example, MATLAB displays `costs_march` at the prompt. Add any arguments, and press **Enter** again to run the statement.

You can select from the list of possible completions using navigation keys such as up and down arrows, and **Page Up**. You can clear the list without selecting anything by pressing **Escape**. Note that the list of possible completions might include items that are not valid commands, such as private functions.

#### Tab Completion for Directories and Filenames

Tab completion works for directories and filenames in MATLAB functions. For example, type

```
edit d:/<Tab>
```

MATLAB displays the list of directories and files in `d`, from which you can choose one. For example, type

```
mym<Tab>
```

MATLAB displays

```
edit d:/mymfiles/
```

where `mymfiles` is the only directory on your `d` drive whose name begins with `mym`. Continue using tab completion to display and complete directory names or filenames until you finish the edit statement.

#### Tab Completion for Structures

For structures, after the period separator, press **Tab**. For example, type

```
mystruct.<Tab>
```

to display all fields of `mystruct`. If you type a structure and include the start of a unique field after the period, pressing **Tab** completes that structure and field entry.

For example, type

```
mystruct.n<Tab>
```

which completes the entry `mystruct.name`, where `mystruct` contains no other fields that begin with `n`.


### Tab Completion for Properties

Complete property names using tab completion, as in this graphics example. Here, `f` is a figure. Type

```
set(f, 'pap<Tab>
```

MATLAB displays

```
set(f, 'paper
```



PaperOrientation
PaperPosition
PaperPositionMode
PaperSize
PaperType
PaperUnits

Select a property from the list. For example, type

```
u<Enter>
```

and MATLAB completes the property, including the closing quote.

```
set(f, 'paperunits'
```

Continue adding to the statement, as in this example

```
set(f, 'paperunits', 'c<Tab>
```

MATLAB automatically completes the property

```
set(f, 'paperUnits', 'centimeters'
```

because `centimeters` is the only possible completion.

## Keyboard Shortcuts in the Command Window

Following is the list of arrow and control keys that serve as shortcuts for using the Command Window. In addition to these shortcut keys, you can use shortcuts for menu items, which you can view on the menus, as well as general desktop shortcuts described in “Keyboard Shortcuts” on page 2-35. If you select the Emacs (MATLAB standard) preference for keybindings (see “Command Line Key Bindings” for an explanation), you can also use the **Ctrl**+key combinations shown in the table.

Key	Control Key for Emacs (MATLAB standard) Preference	Operation
↑	<b>Ctrl+P</b>	Recall <i>previous</i> line—for details, see “Recalling Previous Lines” on page 3-12. See also “Command History” on page 3-30, which is a log of previously used functions, and “Keeping a Session Log” on page 3-21.  With the <b>Accessibility</b> preference selected, moves the cursor up a line when it is above the command line. In that event, use <b>Ctrl</b> +↑ to recall previous lines for Windows and Macintosh key bindings.
↓	<b>Ctrl+N</b>	Recall <i>next</i> line—for details, see “Recalling Previous Lines” on page 3-12. Works only after using the up arrow or <b>Ctrl+P</b> .  With the <b>Accessibility</b> preference selected, moves the cursor down a line when it is above the command line. In that event, use <b>Ctrl</b> +↓ to recall previous lines for Windows and Macintosh key bindings.
<b>Ctrl+Home</b>		Move to top of Command Window.
<b>Ctrl+End</b>		Move to end of Command Window.
←	<b>Ctrl+B</b>	Move <i>back</i> one character.
→	<b>Ctrl+F</b>	Move <i>forward</i> one character.
<b>Ctrl+ →</b>		Move <i>right</i> one word.

<b>Key</b>	<b>Control Key for Emacs (MATLAB standard) Preference</b>	<b>Operation (Continued)</b>
<b>Ctrl+ ←</b>		Move left one word.
<b>Home</b>	<b>Ctrl+A</b>	Move to beginning of line.
<b>End</b>	<b>Ctrl+E</b>	Move to end of line.
<b>Esc</b>	<b>Ctrl+U</b>	Clear the command line when cursor is at the command line. Otherwise, move cursor to command line.
<b>Delete</b>	<b>Ctrl+D</b>	Delete character at cursor in command line.
<b>Backspace</b>	<b>Ctrl+H</b>	Delete character before cursor in command line.
	<b>Ctrl+K</b>	Cut contents ( <i>kill</i> ) to end of command line.
<b>Shift+Home</b>		Select to beginning of line.
<b>Shift+End</b>		Select to end of last line. Can start at any line in the Command Window.
<b>Enter</b> in selection		Append selection to statement at command line and execute it.
<b>Ctrl+Enter</b> in hyperlink		Execute hyperlink displayed in Command Window. For example, in the hyperlink of an error message, opens the file in the Editor at that line number.

## Navigating Above the Command Line

To peruse or copy information in the Command Window that is above the command line (>> prompt), use the mouse and scroll bar, key combinations such as **Ctrl+Home**, and search features. By default, the up and down arrow keys recall statements so you cannot use them to move the cursor when it is above the command line.

To use the up and down arrow keys to move the cursor when it is above the command line, select **File -> Preferences -> Command Window**, and select the **Accessibility** preference.

## Controlling Output

- “Suppressing Output” on page 3-18
- “Paging of Output in the Command Window” on page 3-18
- “Formatting and Spacing Numeric Output” on page 3-19
- “Clearing the Command Window” on page 3-20
- “Printing Command Window Contents” on page 3-20
- “Keeping a Session Log” on page 3-21

### Suppressing Output

If you end a line with a semicolon ( ; ) and then press **Enter** or **Return**, MATLAB runs the statement but does not display any output. This is particularly useful when you generate large matrices. For example, running

```
A = magic(100);
```

creates A but does not show the resulting matrix in the Command Window.

### Paging of Output in the Command Window

If output in the Command Window is lengthy, it might not fit within the screen and might display too quickly for you to see it without scrolling back to it. To avoid that problem, use the `more` function to control the paging of output in the Command Window. By default, `more` is off.

After you type `more on`, MATLAB displays only a page (a screen full) of output, pauses, and displays

```
--more--
```

indicating there is more output to display. Press one of the following keys.

<b>Key</b>	<b>Action</b>
<b>Enter</b> or <b>Return</b>	To advance to the next line
<b>Space Bar</b>	To advance to the next page
<b>q</b>	To stop displaying the output

You can scroll up in the Command Window to see input and output that no longer fit in the view. To use the up and down arrow keys to go to the input and output that no longer fit in the view, select the Command Window Accessibility preference.

## Formatting and Spacing Numeric Output

By default, numeric output in the Command Window is displayed as 5-digit scaled, fixed-point values, called the short format. Use the text display preference to change the numeric format of output for the current and future sessions. The text display format affects only how numbers are shown, not how MATLAB computes or saves them.

### Function Alternative

Use the `format` function to control the output format of the numeric values displayed in the Command Window. The format you specify applies until you change it or until the end of the session. More advanced alternatives are listed in the “See Also” section of the format reference page.

### Examples of Formats

Here are a few examples of the various formats and the output produced from the following two-element vector `x`, with components of different magnitudes.

```
x = [4/3 1.2345e-6]

format short
    1.3333    0.0000

format short e
    1.3333e+000    1.2345e-006

format +
++
```

A complete list and description of available formats is at the reference page for `format`. For more control over the output format, use the `sprintf` and `fprintf` functions.

### Controlling Spacing

Use the text display preference or format function to control spacing in the output. Use

```
format compact
```

to suppress blank lines, allowing you to view more information in the Command Window. To include the blank lines, which can help make output more readable, use

```
format loose
```

### Clearing the Command Window

Select **Clear Command Window** from the **Edit** menu to clear it. This does not clear the workspace, but only clears the view. Afterwards, you still can use the up arrow key to recall previous functions.

**Function Alternative.** Use `clc` to clear the Command Window. Similar to `clc` is the `home` function, which moves the prompt to the top of the Command Window but does not clear the text in the window.

### Printing Command Window Contents

To print the complete contents of the Command Window, select **File -> Print**. To print only a selection, first make the selection in the Command Window and then select **File -> Print Selection**.

Specify printing options for the Command Window by selecting **File -> Page Setup**. For example, you can print with a header. For more information, see “Page Setup Options for Printing” on page 2-40.



## Keeping a Session Log

### The diary Function

The `diary` function creates a copy of your MATLAB session in a disk file, including keyboard input and system responses, but excluding graphics. You can view and edit the resulting text file using any text editor. To create a file on your disk called `sept23.out` that contains all the functions you enter, as well as MATLAB output, enter

```
diary('sept23.out')
```

To stop recording the session, use

```
diary('off')
```

### Other Session Logs

There are two other means of viewing session information:

- The Command History, which contains a log of all functions executed in the current and previous sessions.
- The `logfile` startup option—see “Startup Options” on page 1-4.

## Searching in the Command Window

You can search for specified text that appears in the Command Window, where the text was either part of input you supplied, or output displayed by MATLAB. There are two search features for the Command Window:


- “Find Dialog” on page 3-22
- “Incremental Search” on page 3-23

After finding the text, you can copy and paste it to the prompt in the Command Window to run it, or into an M-file or other file.

See also “Recalling Previous Lines” on page 3-12, “Tab Completion” on page 3-12, and “Keyboard Shortcuts in the Command Window” on page 3-16 for techniques to reuse previous statements and navigate in the Command Window.

### Find Dialog

Select **Find** from the **Edit** menu to search for specified text using the **Find** dialog box. Complete the dialog box. The search begins at the current cursor position. MATLAB finds the text you specified and highlights it. Click **Next** or **Previous** to find another occurrence, or press **F3** or **Shift+F3**.

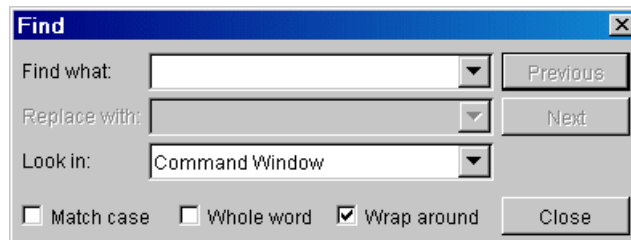

MATLAB beeps when a search for **Next** reaches the end of the Command Window, or when a search for **Previous** reaches the top of the Command Window. If you have **Wrap around** selected, it continues searching after beeping.

Note that you can only search for text currently displayed in the Command Window. To increase the amount of information maintained in the Command Window, increase the setting for command session scroll buffer size in Command Window preferences, and do not clear the Command Window.

## Incremental Search


With the incremental search feature, the cursor moves to the next or previous occurrence of the specified text in the Command Window. It is similar to the Emacs search feature. Incremental search is also available in the Editor/Debugger—see “Incremental Search” on page 6-25. To use the incremental search feature in the Command Window:

- 1 Position the cursor where you want the search to begin.
- 2 How you begin the incremental search depends on your setting for the command line key bindings preference:
  - Press **Ctrl+S** for **Emacs**, or
  - Press **Ctrl+Shift+S** for **Windows**

To look for the previous occurrence, type **Ctrl+R** or **Ctrl+Shift+R** instead.

An incremental search field, **Inc Search**, appears at the bottom of the Command Window and is preceded by **F** for a forward search, or **R** when you are looking for the previous occurrence (reverse search).

Search begins at current cursor position.

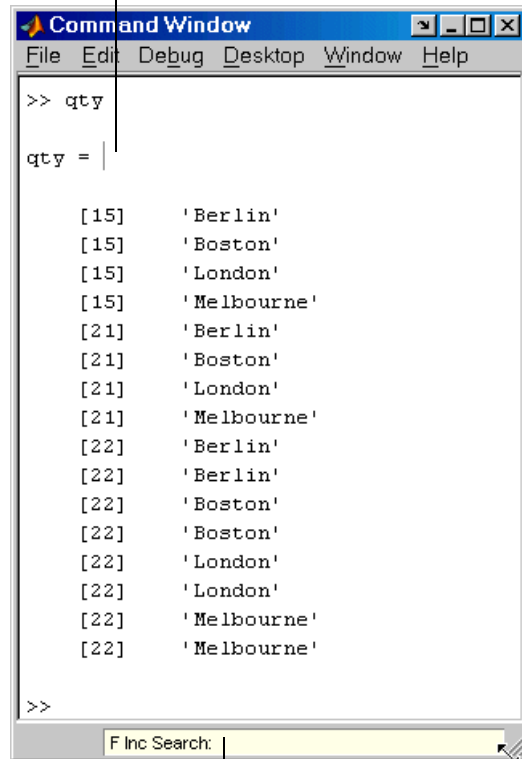


Incremental search field

- 3 In the **Inc Search** field, type the text you want to find. For example, look for Boston.

As you type the first letter, b, the first occurrence of that letter in the Command Window after the current cursor position is highlighted. For the example shown, the first occurrence of b is highlighted, the b in Berlin. Note that incremental search allows for case sensitivity—see “Case Sensitivity in Incremental Search” on page 3-26.

MATLAB finds the next b.

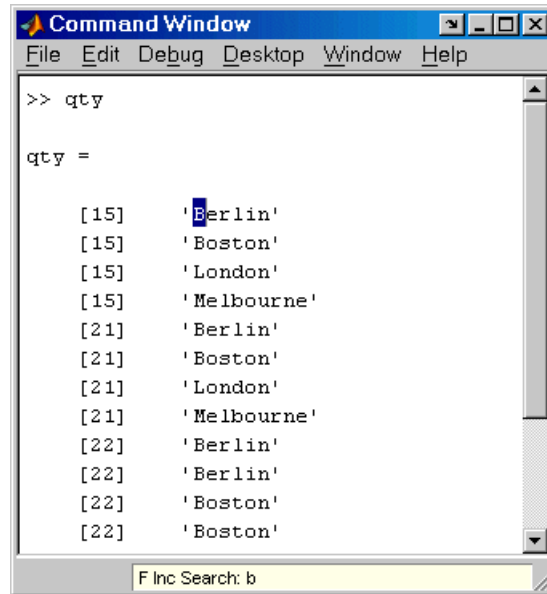

```

Command Window
File Edit Debug Desktop Window Help
>> qty

qty =

    [15]    'Berlin'
    [15]    'Boston'
    [15]    'London'
    [15]    'Melbourne'
    [21]    'Berlin'
    [21]    'Boston'
    [21]    'London'
    [21]    'Melbourne'
    [22]    'Berlin'
    [22]    'Berlin'
    [22]    'Boston'
    [22]    'Boston'

F Inc Search: b

```

When you type the next letter, the first occurrence of the text becomes highlighted. In the example, when you add the letter o to the b so that the **Inc Search** field now has bo, the bo in Boston becomes highlighted.

- If you mistype in the **Inc Search** field, use the **Back Space** key to remove the last letters and make corrections.
  - After finding the bo, you can press **Ctrl+W** to complete that word. In this example, Boston appears in the **Inc Search** field.
- 4** To find the next occurrence of Boston in the Command Window, press **Ctrl+S**. To find the previous occurrence of the text, press **Ctrl+R**.

If MATLAB beeps, the display shows **Failing F Inc Search**, followed by the text you entered. This means either that the text was not found, or the search wrapped past the end or beginning of the Command Window.

- 5 To end the incremental search, press **Esc** or **Enter**, or any other key that is not a character or number.

The **Inc Search** field no longer appears. The cursor is at the position where the text was last found, with the search text highlighted.

- 6 If you end incremental search and then enter **Ctrl+S** or **Ctrl+R**, the search term from your previous incremental search appears in the **Inc Search** field.


Incremental search is also available in the Editor/Debugger.

### Case Sensitivity in Incremental Search

When you enter lowercase letters in the **Inc Search** field, for example, **b**, incremental search looks for both lowercase and uppercase instances of the letters, for example **b** and **B**. However, if you enter uppercase letters, for example, **B**, incremental search only looks for instances that match the case you entered.


In the example, enter **b0** in the **Inc Search** field and incremental search does not find any matching text because the **0** is uppercase.

Incremental search is case-sensitive when you enter uppercase letters. Here, no matches are found for **b0**.

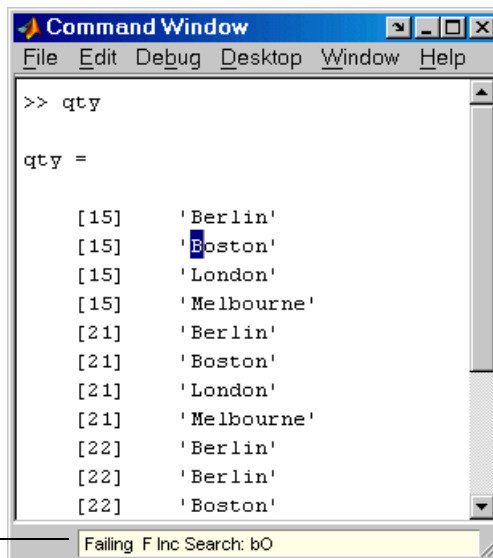

## Preferences for the Command Window

To set preferences for the Command Window, select **File -> Preferences** and then select **Command Window** in the left pane of the **Preferences** dialog box.

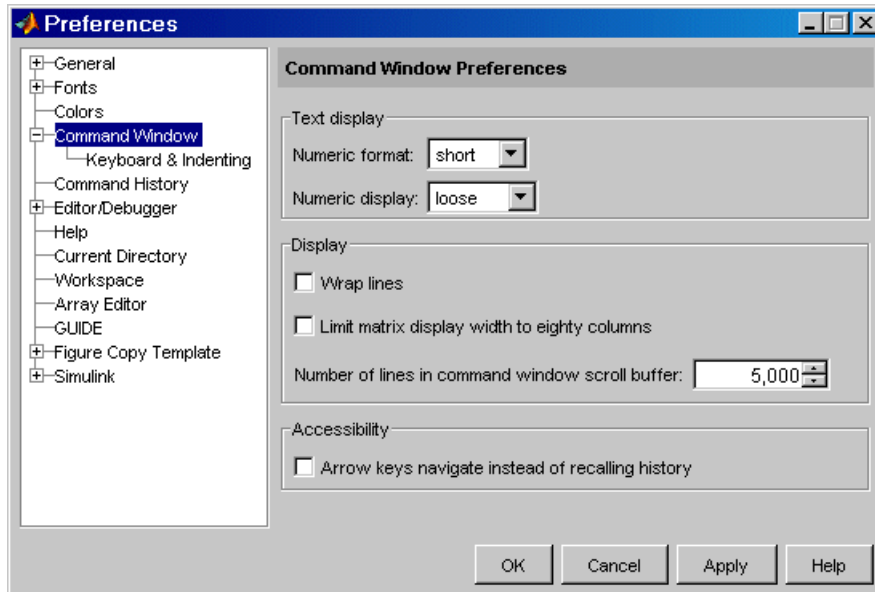

Set these Command Window preferences:

- “Format, Display, and Accessibility Preferences” on page 3-27
- “Keyboard and Indenting Preferences for the Command Window” on page 3-29

### Format, Display, and Accessibility Preferences

#### Text Display

Specify the format, that is, how output appears, in the Command Window.

**Numeric format.** Output format of numeric values displayed in the Command Window. This affects only how numbers are displayed, not how MATLAB computes or saves them. The format reference page includes the list of available formats, with examples.

**Numeric display.** Spacing of output in the Command Window. To suppress blank lines, use `compact`. To display blank lines, use `loose`. For more information, see the reference page for `format`.

### Display

**Wrap lines.** Select to make a single line of input or output in the Command Window break into multiple lines in order to fit within the current width of the Command Window. This is useful for console mode. With this option selected, an entire line is visible without scrolling, and the horizontal scroll bar does not appear because it is not needed.

**Limit matrix display width to eighty columns.** When selected, MATLAB displays only 80 columns of matrix output, regardless of the width of the Command Window. Clear the check box if you make the Command Window wider than 80 columns and want matrix output to fill the width of the Command Window. See also the display reference page.

To determine the number of columns and rows that will display in the Command Window, given its current size, use

```
get(0, 'CommandWindowSize')
```

With the matrix display width preference cleared, the number of columns is based on the width of the Command Window. With the preference set to 80 columns, the number of columns is always 80.

**Number of lines in command window scroll buffer.** Set the number of lines maintained in the Command Window, from 1,000 to 25,000. This is the number of lines you can see when you scroll vertically. A larger buffer means you can view more lines and it provides a larger base for search features, but requires more memory.

This preference setting does not impact the number of lines you can recall when you use the up arrow in the Command Window. Using the up arrow, you can recall all lines shown in the Command History window, regardless of how many lines you can see in the Command Window.



## Accessibility

Select this option to use the up and down arrow keys to move the cursor when it is above the command line. With this preference selected, use **Ctrl+ up arrow** or down arrow to recall statements for Windows and Macintosh key bindings, or **Ctrl+P** and **Ctrl+N** for **Emacs (MATLAB standard)** keybindings.

Clear this preference to use the up and down arrow keys to recall statements. Use the mouse and other features to move the cursor when above the command line.

## Keyboard and Indenting Preferences for the Command Window

### Command Line Key Bindings

Specify the keyboard shortcuts to be used at the command line.

**Emacs (MATLAB standard).** Use the control keys listed in “Keyboard Shortcuts in the Command Window” on page 3-16, which should be familiar to existing MATLAB users and Emacs users. For example, **Ctrl+A** moves the cursor to the beginning of the line.

**Windows.** Use Windows standard control keys. For example, **Ctrl+A** is the shortcut for **Edit -> Select All**, which selects the entire contents of the Command Window.

**Macintosh.** Available only on Macintosh platforms, specify to use Macintosh keys, such as the Command key. When selected, you can use the Macintosh command key instead of the **Ctrl** key.

### Tab Key

**Tab size.** Number of spaces assigned to a tab stop when displaying output.

**Enable tab completions.** Select the check box if you want to use tab completion when typing functions in the Command Window. Clear the check box if you do not want to use the tab completion feature. In that event, when you press the **Tab** key, MATLAB moves the cursor to the next tab stop rather than completing a function.


## Command History

The Command History window displays a log of the statements most recently run in the Command Window. If you are using the Help browser, watch the Command History video demo for an overview of the major functionality.

To show or hide the Command History window, use the Desktop menu. Alternatively, use `commandhistory` to open the MATLAB Command History when it is closed, or to select it when it is open. For details, see “Arranging the Desktop—Overview” on page 2-5.

Use the Command History window as described in these sections:

- “Viewing Statements in the Command History Window” on page 3-31
- “Using Statements from the Command History” on page 3-32
- “Searching in the Command History” on page 3-33
- “Searching in the Command History” on page 3-33
- “Printing the Command History” on page 3-35

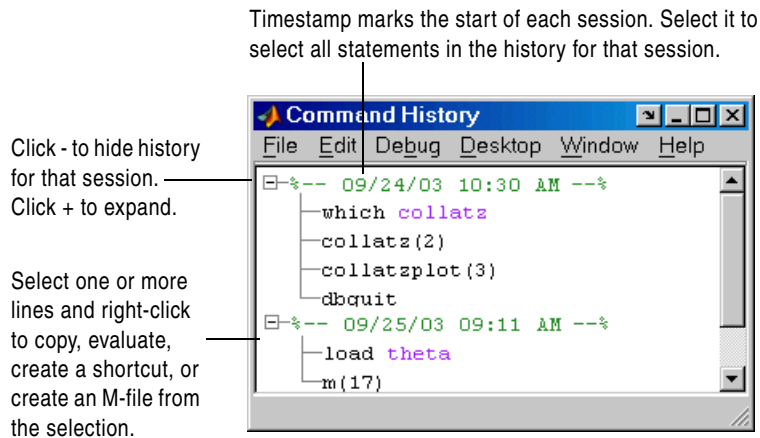

MATLAB provides other options for viewing a history of statements. See also

- “Recalling Previous Lines” on page 3-12, which describes using the up arrow in the Command Window
- The `diary` function reference page
- “Startup Options” on page 1-4, which includes the `logfile` startup option

## Viewing Statements in the Command History Window

The Command History window lists statements you ran in the current session and in previous sessions. The time and date for each session appear at the top of the history of statements for that session. Use the scroll bar or the up and down arrow keys to move through the Command History window.

Click **-** to hide the history for a session, and click **+** to show it. Select a timestamp to select all entries for that session. With a timestamp selected, you can press the **+** or **-** keys to show and hide entries.

The Command History file is `history.m`. Type `prefdir` in the Command Window to see the location of the file. The `history.m` file is loaded when MATLAB starts.

MATLAB automatically saves the Command History file throughout the session according to the **Saving** preference you specified. You can choose to automatically exclude certain statements from being written to the Command History with the **Settings** preference. For details, see “Preferences for Command History” on page 3-37.

## Using Statements from the Command History

You can select statements in the Command History and then perform the following actions on the selected statements.

Action	How to Perform the Action
Run the statements in the Command Window	Double-click an entry (entries) in the Command History window to execute the statement(s). For example, double-click <code>edit myfile</code> to open <code>myfile.m</code> in the Editor. You can also run a statement by right-clicking it and selecting <b>Evaluate Selection</b> from the context menu, and by selecting a statement and pressing <b>Enter</b> or <b>Return</b> .
Edit and run the statements in the Command Window	Select an entry or entries and then select <b>Copy</b> from the context menu. Paste the selection into the Command Window. Alternatively, drag the selection to the Command Window.  Then in the Command Window, edit the statements, and press <b>Enter</b> or <b>Return</b> to execute them.
Copy the statement(s) to another window	Select an entry or entries and then select <b>Copy</b> from the context menu. Paste the selection into an open M-file in the Editor or any application. Alternatively, drag the selection from the Command History to an open M-file or another application.

<b>Action</b>	<b>How to Perform the Action (Continued)</b>
Create an M-file from the statement(s)	Select an entry or entries and then right-click and select <b>Create M-File</b> from the context menu. The Editor opens a new M-file that contains the statements you selected from the Command History window.
Create a shortcut from the statement(s)	Select an entry or entries and then right-click and select <b>Create Shortcut</b> from the context menu. Alternatively, drag the selection to the <b>Shortcuts</b> toolbar. The <b>Shortcut Editor</b> opens and the selected statements appear in the <b>Callback</b> field. For more information, see “Shortcuts for MATLAB—Easily Run a Group of Statements” on page 2-21.

## Searching in the Command History

There are two types of search in the Command History:


- “Find Next Entry By Letter” on page 3-33
- “Find Text” on page 3-34

After finding an entry, you can copy and paste it into an M-file or other file, or you can right-click and select **Evaluate Selection** to run the entry.

### Find Next Entry By Letter


Type a letter in the Command History to move to the next entry that begins with that letter, as illustrated in the following example.

- 1 Position the cursor at which `collatz` in the Command History.

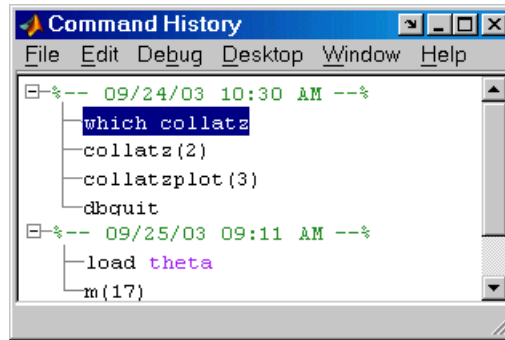

- 2 Type 1. The Command History selects the next entry that begins with 1, in this example, load.


Type a letter, in this example 1, and the Command History selects the next entry that begins with that letter.

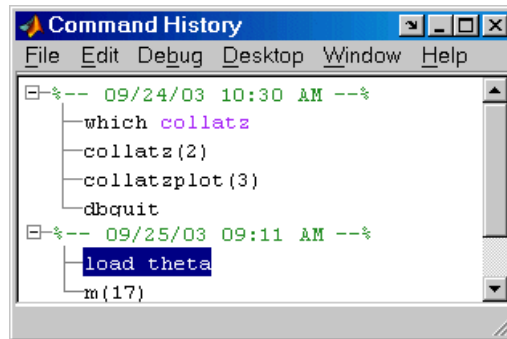

### Find Text

Select **Find** from the **Edit** menu to search for specified text using the **Find** dialog box. Complete the dialog box. The search begins at the current cursor position. MATLAB finds the text you specified and highlights it. Click **Next** or **Previous** to find another occurrence, or press **F3** or **Shift+F3**. Find looks for visible entries only, that is, it does not find entries in collapsed nodes.

Search for specified text in the Command History.

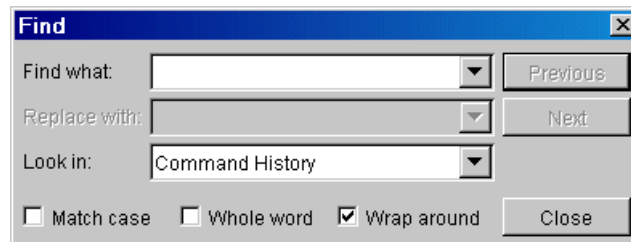

MATLAB beeps when a search for **Next** reaches the end of the Command History, or when a search for **Previous** reaches the top of the Command History. If you have **Wrap around** selected, it continues searching after beeping.

## Printing the Command History

To print the contents of the Command History window, select **File -> Print**. Specify options for printing by selecting **File -> Page Setup**. For example, you can print the history with a header. For more information, see “Page Setup Options for Printing” on page 2-40.

## Deleting Entries in the Command History Window

Delete entries in the Command History window when you feel there are too many and it becomes inconvenient to find the ones you want. All entries remain until you delete them.

To delete entries in the Command History window, first select the entries to delete:

- Select a single entry.
- **Shift**+click or **Ctrl**+click to select multiple entries.
- Select the timestamp for a session to select all entries for that session. Then use **Shift**+click or **Ctrl**+click to select multiple timestamps with all of their entries.

Then right-click and select **Delete selection** from the context menu, or press the **Delete** key.

To delete all entries, select **Edit -> Clear Command History**.

After deleting entries from the Command History, you will not be able to recall those statements in the Command Window as described in “Recalling Previous Lines” on page 3-12.



## Preferences for Command History

Using Command History preferences, you can choose to exclude statements from the Command History and specify how often to save the Command History.

To set preferences for the Command History, select **File -> Preferences**, and then select **Command History** in the **Preferences** dialog box.

### Settings

Specify the types of statements to exclude from the Command History. Note that when you exclude statements from the Command History, you cannot recall them in the Command Window as described in “Recalling Previous Lines” on page 3-12.

#### Save Exit/Quit Commands

Select the check box to save exit and quit commands in the Command History.

#### Save Consecutive Duplicate Commands

Select the check box if you want consecutive executions of the same statement to be saved to the Command History.

For example, with this option selected, run `magic(5)`, and then run `magic(5)` again. The Command History saves two consecutive entries for `magic(5)`. With this option cleared, for the same example, the Command History saves one entry for `magic(5)`. If you then run `magic(10)`, the Command History saves two entries, `magic(5)` followed by `magic(10)`.

### Saving

Use **Saving** preferences to specify how often to automatically save the Command History during a MATLAB session.

#### Save History File On Quit

Select this option to save the Command History when you end the MATLAB session. If the session does not end via a normal termination, that is, via the exit or quit functions, **File -> Exit MATLAB**, or the MATLAB desktop close box, the history file is not saved for that session.

### **Save After n Commands**

Select this option to save the Command History after  $n$  statements are added to the file. For example, when you select the option and set  $n$  to 10, after every 10 statements are added, the history file is automatically saved. Use this option if you don't want to risk losing entries to the saved history because of an abnormal termination, such as a power failure.

### **Don't Save History File**

Select this option if you do not want to save the history file. This feature is useful when multiple users share the same machine and do not want other users to view the statements they have run.

# Help for Using MATLAB

---

If you are using the Help browser, watch the Help and Documentation video demo for an overview of the major functionality.

Types of Documentation (p. 4-2)

Use the type of documentation that best meets your need.

Help Browser (p. 4-4)

Overview to finding information about your MathWorks products using the Help browser.

Find Information with the Help Browser (p. 4-7)

Use the contents listing of the online documentation, a global index, and full-text search.

View Documentation in the Help Browser (p. 4-19)

After finding documentation, view the documentation and perform other operations using the display pane.

Demos in the Help Browser (p. 4-23)

Run demonstration programs, and view and copy the M-file code behind them.

Preferences for the Help Browser (p. 4-27)

Specify fonts used in the Help browser and limit the documentation included using the product filter.

Printed Documentation (p. 4-30)

Print from the Help browser or from the PDF version of the documentation, or purchase printed documentation.

Help Functions (p. 4-32)










Use functions to get information, such as `help` and `doc`.





Other Forms of Help (p. 4-37)

Use product-specific help features, download M-files, contact Technical Support, see documentation for other MathWorks products, view a list of other books, and participate in a MATLAB newsgroup.

## Types of Documentation

The Help browser and help functions provide access to the following types of information for all installed MathWorks products. The icons shown here appear in the Help browser contents listing to help you quickly identify documentation by type.

Icon	Type of Documentation	Description and When to Use
	Getting Started	Review Getting Started documentation before you begin using a product or feature for the first time. Then, to learn more, go to the user guides, reference pages or demos and examples.
	Release Notes	An overview of new products and features in a release, it also includes upgrade information and any known problems and limitations. Review the Release Notes for all your products when you first start using a new release.
 or 	Product	MATLAB and toolboxes use orange book icons  , while Simulink, Blocksets, and related products use blue book icons  .
	Index of Examples	Accessible via the Help browser <b>Contents</b> listing, this is an index of the major examples included in the Help browser documentation.
	User Guides (blue)	User guide material is comprehensive, containing overviews as well as detailed instructions. Consult it after reviewing Getting Started material.
	Reference Pages (orange)	Each function has a reference page that provides the syntax, description, examples, and other information for that function. It includes links to related functions and additional information. Reference pages are also provided for blocks and properties.


Icon	Type of Documentation	Description and When to Use (Continued)
	Printable Documentation	Most products provide the online documentation in a printable format, PDF. Access PDF files via the Help browser and print them from your PDF reader, such as Adobe Acrobat. Most PDF files reside only on The MathWorks Web site, so you need an Internet connection to view them.
	Product Pages	Available on the MathWorks Web site, a product page contains the latest product information.
	Support and Web Services	Provides access to the MathWorks Technical Support searchable database, maintained on the MathWorks Web site. Use it to find solutions to questions posed by users.
	Demos	MathWorks products come with examples that demonstrate features of the product. Many of the demos actually run MATLAB code. Use the Help browser <b>Demos</b> tab to access demos for the products you have installed.
none	M-File Help	Get M-file help in the Command Window to quickly access basic information for a function. It provides a brief description of a function and its syntax. It is called M-file help because the text of the help is a series of comments at the top of the M-file for a function.

## Accessing Documentation on the Web

You can access all product documentation on The MathWorks Web site at <http://www.mathworks.com/access/helpdesk/help/helpdesk.shtml>. Use the Web site documentation for products you have not installed, or for prior versions of a product. PDF documentation is available only on the Web site.

## Help Browser

Use the Help browser to search and view documentation and demonstrations for MATLAB and all other installed MathWorks products. The Help browser is an HTML browser integrated with the MATLAB desktop.

To open the Help browser, click the help button  in the desktop toolbar, type helpbrowser in the Command Window, or use the **Help** menu in any tool.

There are two panes:


- The Help Navigator, on the left, for finding information, includes **Contents**, **Index**, **Search**, and **Demos** tabs. For more information, see “Find Information with the Help Browser” on page 4-7.
- The display pane, on the right, for viewing documentation and demos.

Tabs in the **Help Navigator** pane provide different ways to find information.

View documentation in the display pane.



Use the close box to hide the pane.

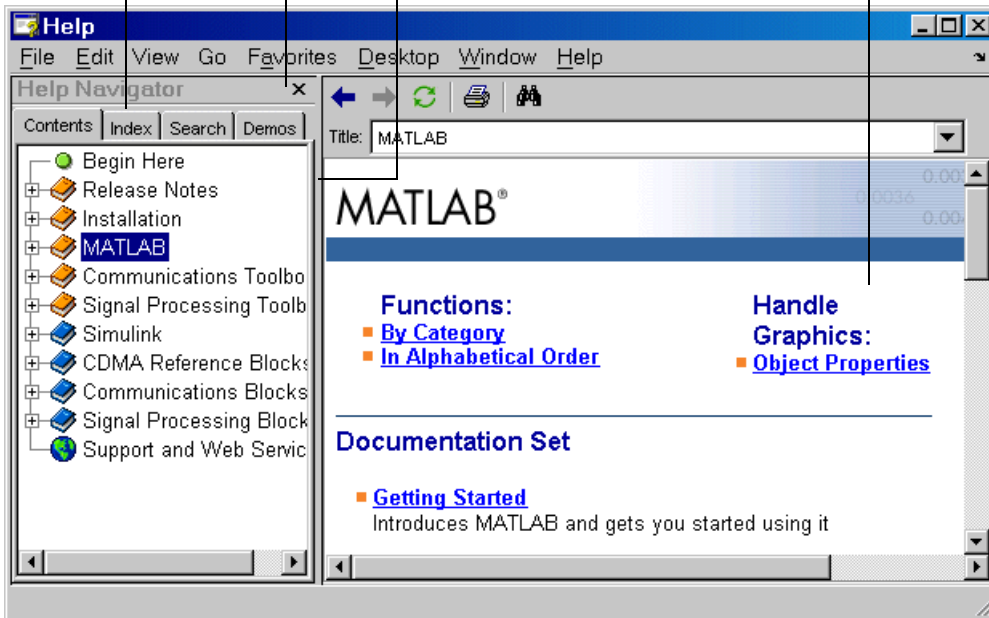Drag the separator bar to adjust the width of the panes.




## Resizing the Help Browser

To adjust the relative width of the two panes, drag the separator bar between them. You can also change the font in either of the panes—see “Help Fonts Preferences—Specifying Font Name, Style, and Size” on page 4-29.

Once you find the documentation you want, you can close the **Help Navigator** pane so there is more screen space to view the information itself. This is shown in the following figure. To close the **Help Navigator** pane, click the close box  in the pane’s upper right corner. To open the **Help Navigator** pane from the display pane, click the Help Navigator icon on the toolbar . Alternatively, use the **View** menu.

To show only the display pane, as in this illustration, select **View -> Help Navigator**.

Then click the Help Navigator icon to display the Navigator again.

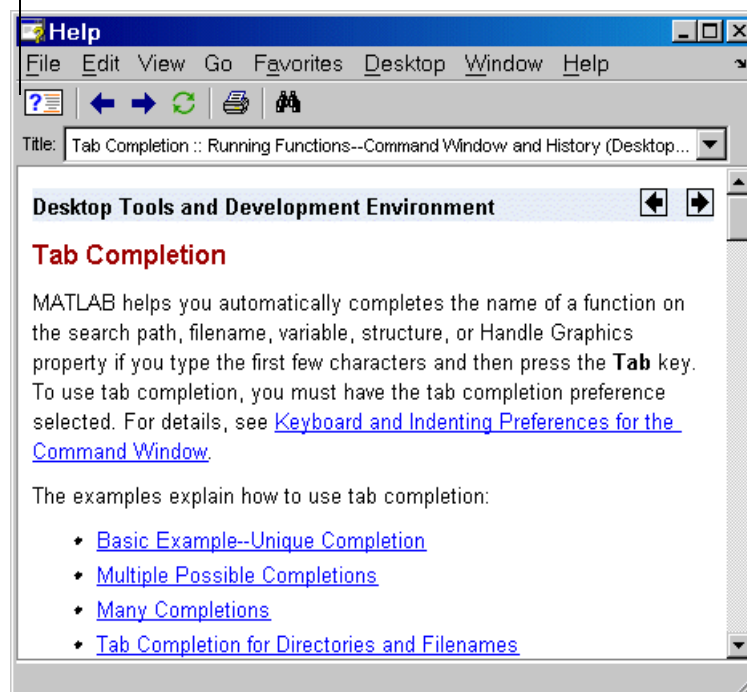

### **Adding Your Own Help Files to the Help Browser**

You can add your own HTML help files so they appear in the Help browser. For details, see “Adding Your Own Toolboxes to the Development Environment” in the online documentation.




## Find Information with the Help Browser

Use the Help Navigator, the left pane in the Help browser, to find information. These sections describe the main features:


- “Contents Listing in the Help Browser” on page 4-7—View an expandable table of contents for documentation.
- “Index for Help Browser” on page 4-10—Use keywords to find information.
- “Search Documentation with the Help Browser” on page 4-12—Find documentation using full-text and other forms of search.
- “Favorites” on page 4-18—Bookmark pages you want to refer to again.

### Contents Listing in the Help Browser

To list the documentation titles and tables of contents for products you installed, click the **Contents** tab in the **Help Navigator** pane. To show documentation for only some of the installed products, use the product filter.

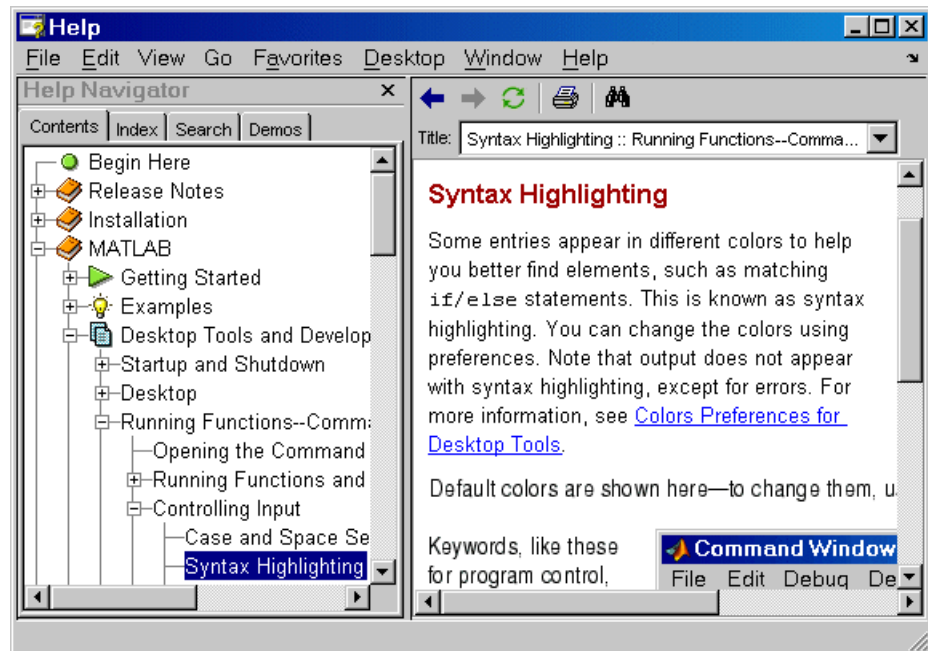

### Product Roadmap

When you select a product in the **Contents** pane (any entry with a book icon ) , such as MATLAB or the Communications Toolbox, a *roadmap* of the documentation for that product appears in the display pane. The roadmap includes links to commonly used sections, including:

- Function and block references pages
- An index of major examples in the documentation
- The PDF version of the documentation, which is suitable for printing (this is the only direct access from MATLAB to the printable documentation)

### Navigate the Contents Listing

In the **Contents** listing, you can

- Click the + to the left of an item to show the first page of that document or section in the display pane and expand the listing for that item in the Navigator pane. Shortcuts are: double-click the item, press the right arrow key, or press + on the numeric keypad.
- Click the - to the left of an item to collapse the listings for that item. Shortcuts are: double-click the item, press the left arrow key, or press - on the numeric keypad.
- Select an item to show the first page of that document or section in the display pane.
- Press \* on the numeric keypad to expand all nodes for the selection.
- Use the down and up arrow keys to move through the list of items.

### Icons in the Contents Listing

Icons for entries in the top levels of the **Contents** listing represent the type of documentation so you can quickly find the kind of information you need for a product. See the legend for icons in “Types of Documentation” on page 4-2.

### Product Pages

After expanding the listing for a product in the **Contents** pane, the last entry is **Product Page (Web)**. This links to the MathWorks Web site for the latest information about that product. Like other links to the Web, the page opens in your system Web browser.

## Synchronize Contents Listing with Display Pane


By default, the topic highlighted in the **Contents** pane matches the title of the page appearing in the display pane. The **Contents** listing is said to be synchronized with the displayed document. This feature is useful if you access documentation with a method other than the **Contents** pane, for example, using a link in a page in the display pane. With synchronization, you know what book and section the displayed page is part of. Note that synchronization only applies to the major headings in a document. For pages that begin with lower level headings, the **Contents** listing does not synchronize.

You can turn off synchronization. To do so, use preferences. See “General—Keep Contents Synchronized” on page 4-28.

Synchronization only applies to the **Contents** pane. The page shown in the display pane does not necessarily correspond to the selection in the **Index**, **Search**, or **Demos** tabs. However, if you return to the **Contents** pane, the **Contents** pane synchronizes with the displayed page.

## Index for Help Browser

To find specific index entries (selected keywords) in the MathWorks documentation for installed products, use the **Index** in the **Help Navigator** pane.

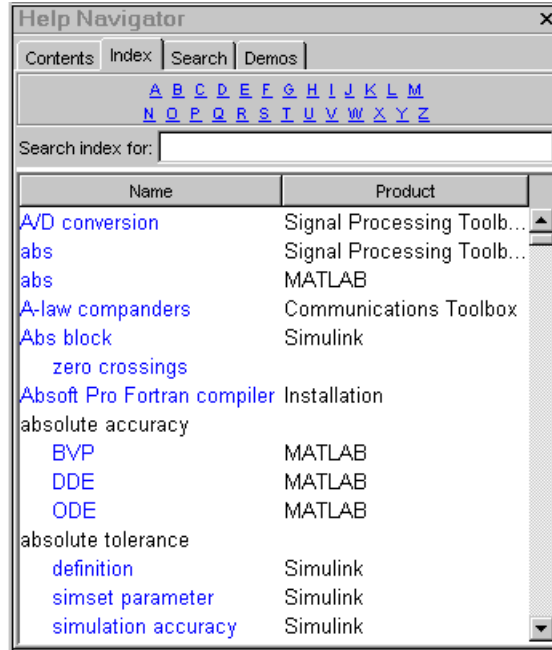

- 1 Click the **Index** tab.
- 2 Type a word or words in the **Search index for** field. As you type, the **Index** pane displays matching entries and their subentries (indented). It might take a moment for the display to appear. The index is not case sensitive. If there is not a matching entry, it displays the page for the letter that your entry begins with.


The product whose documentation includes the matching index entry is listed next to the index entry, which is useful when there are multiple matching index entries. You might have to make the **Help Navigator** pane wider to see the product.

- 3 Select a blue index entry from the list (where blue represents a hyperlink) to display the page to which the term refers. Multiple links per entry are denoted by numbers in brackets following the term. (Black index entries are headings and do not link to any page.)

The page whose entry you selected appears in the display pane, scrolled to the location that the entry references.

- 4 To see more matching entries, scroll through the list.

### Tips for Using the Index

- To see entries for all installed products, select **File -> Preferences -> Help**, and clear the **Enable product filter** check box.
- To see entries for selected products only, select **File -> Preferences -> Help** and set the product filter.
- For more or different results, type a different term or reverse the order of the words you type. For example, if you are looking for creating M-files, type M-files and look for the subentry creating.
- After selecting an entry, search for specified text in the displayed page using the **Find** tool, accessible from the binoculars icon  on the display pane toolbar.
- When there are multiple matching entries, refer to the product associated with each entry, which appears in the second column of the **Index** results. You might need to make the pane wider to see it.
- For different but related results, try the **Search** tab—for instructions, see “Search Documentation with the Help Browser” on page 4-12.

## Search Documentation with the Help Browser

- “Search Pane in Help Browser” on page 4-12
- “Boolean Operators in Search” on page 4-15
- “More About Search” on page 4-15
- “Get Fewer Results” on page 4-16
- “Get More Results” on page 4-17

### Search Pane in Help Browser

To look for a specific word or phrase in the documentation, use the **Search** tab in the **Help Navigator**.





- 1 To limit (or extend) the products whose documentation is searched, set the product filter.
- 2 Click the **Search** tab.
- 3 Type the word or words you want to find in the **Search for** field, and click **Go** (or press **Enter** or **Return**). You can use Boolean operators between the words—see “Boolean Operators in Search” on page 4-15.

The documents containing all of the exact search words are listed, with the documentation **Section** and the **Product** name shown in the second third

columns, providing context for the results. You might need to make the Navigator pane wider to see all columns. The total number of results appears at the bottom left side of the pane.

**4** Select an entry from the list of results.

The selected page appears in the display pane with all occurrences of the search words highlighted using a different color for each search word. Search words remain highlighted until you view another page or until you click the page refresh button  in the toolbar.

In the display pane, use the **Find** tool, accessible from the binoculars icon  on the toolbar, to go directly to the next instance in that page of a word you specify.

**5** Search results are ordered by relevance. For example, titles that contain all search words appear first, while pages containing a single instance of each search word appear last.

- Change the order of the results by clicking a column heading. For example, click **Product** to group results by product. Click **Title** to sort titles alphabetically. A triangular icon indicates the column on which you most recently sorted. After changing the order of results, you need to rerun the search to see results ordered by relevance.
- Change the order of the columns by dragging a column to a new position. For example, you can drag the **Product** column so it is second, which makes the **Title** column third.
- Make columns wider or narrower by dragging the separator bar between the column headings.


**6** For more results, you can search for the words in the Technical Support database on The MathWorks Web site by clicking the link at the bottom of the **Search** results pane.

Results are sorted by title relevance.  
Change the order of results by clicking a column heading.

View and run previous searches.

Instances of search words are highlighted.  
Click the refresh button to clear highlights.

Use **Find** to go directly to specified words.

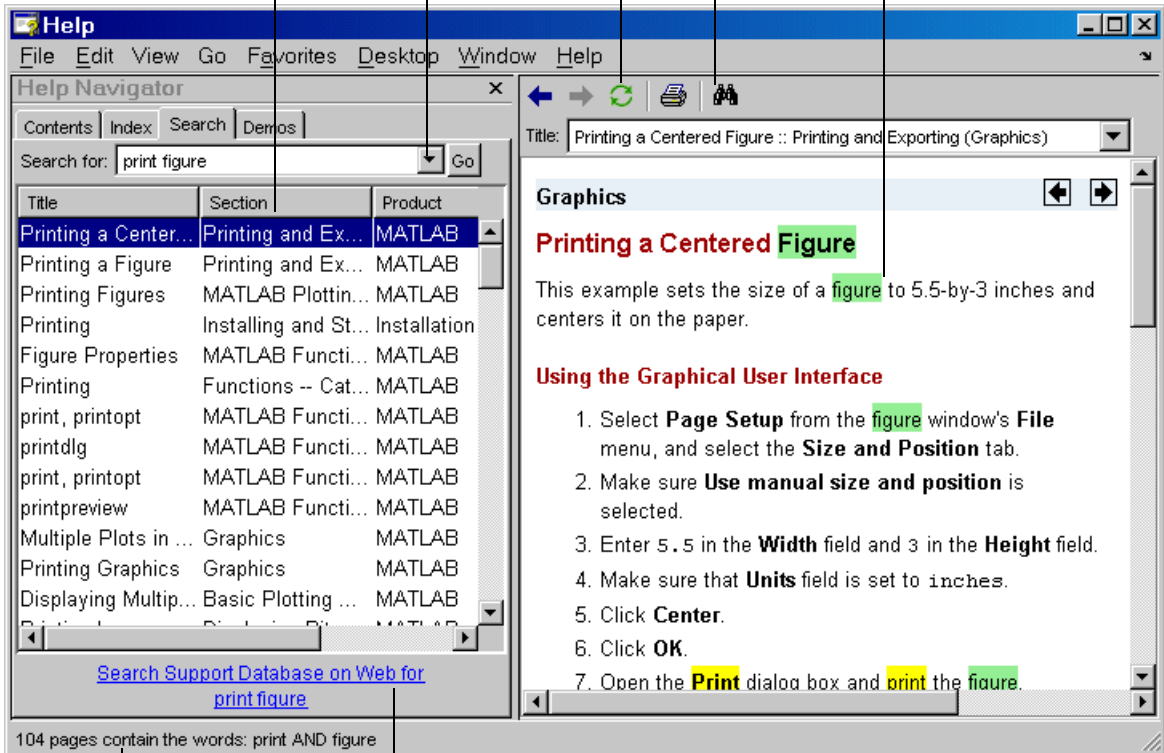

Summary of search results.

For more results, search Technical Support solutions and notes.



**Function Alternative.** From the Command Window, use `docsearch` to open the Help browser to the **Search** pane and search for the specified term. For example

```
docsearch('print figure')
```

finds all pages that contain the words `print` and `figure`. For details, see the `docsearch` reference page.

## Boolean Operators in Search

The search automatically performs a Boolean AND for multiple words. In the example `print figure`, it finds all pages that have both the word `print` and the word `figure`, although the page might not necessarily have the exact phrase “`print figure`”.

You can refine the search by including the Boolean operators AND, OR, and NOT between words. The operators must be in all capital letters and there must be a space before and after each operator. The Boolean operators are evaluated in left to right order.

**Example Using Boolean Operators in Search.** Type

```
print OR printing AND figure NOT exporting
```

to find all pages that contain the words `print` and `figure`, or `printing` and `figure`, but only if the page does not contain the word `exporting`. At the top of the results list are any pages that contain all the ANDed and ORed words in the page title.

## More About Search

These are the guidelines search uses:

- Insignificant words (`a`, `an`, `the`, `of`) are ignored.
- Search is not case sensitive.
- You cannot enter quotation marks around words to find exact phrases and you cannot use wildcards.
- Search does not find operators and special characters, such as `+`, so instead use the **Index**.
- Search does not find numbers, but does find text that contains numbers. For example, search does not find `7`, but does find `V7`.

- If you are searching for information about an option, try including the hyphen (-) before the option, for example, save -append.
- Search does not find words in demos.
- If you search for a function that is used in multiple products (called an overloaded function), the reference pages for all those products are listed. Use the **Product** column to distinguish the reference page you want.

### Get Fewer Results

If there are too many results for the search to be useful, try the following.

<b>Problem</b>	<b>Try These Suggestions</b>
Too many products	Select <b>File -&gt; Preferences -&gt; Help</b> and enable the product filter for specified products. For details, see “Product Filter” on page 4-27.  Order results by product—click the <b>Product</b> (third) column. If you cannot see it, make the pane wider.
Page is not about search word, but just mentions it	Try the <b>Index</b> tab to see more important entries for that search word.
Too many irrelevant results	Type more than one word in the <b>Search for</b> field.  Use Boolean operators (in all capitals), for example, printing AND figures NOT exporting.
Topic is not relevant	Look at the <b>Section</b> (second) column in the search results list, which provides context for the result. If you cannot see the column, make the pane wider.

## Get More Results

If you want more results, try the following.

<b>Problem</b>	<b>Try These Suggestions</b>
No results for the product	Be sure the product filter is set correctly. Select <b>File -&gt; Preferences -&gt; Help</b> and disable the product filter. For details, see “Product Filter” on page 4-27.
No results but you know the word should be there	Try variations of the search words with an OR between the words. For example, search for preference OR preferences to find all pages that contain either the word preference or the word preferences.
Not enough information	Try searching the Technical Support database by clicking the link at the bottom of the <b>Search</b> results pane.

### Favorites

Favorites are bookmarks to pages in the Help browser documentation.

#### Add Favorites

To designate the displayed page as a favorite (that is, to bookmark it):

- 1 Select **Favorites -> Add to Favorites**.
- 2 The **Favorites Editor** dialog box opens. You can accept the defaults and click **Save**, or make changes to the entries:
  - a Use the **Label** provided, or change it to another term.
  - b Do not change the entry for **Callback**.
  - c Maintain the **Category** as Help Browser Favorites so you can access them from the **Favorites** menu.
  - d For **Icon**, keep the default Help icon, or choose another.

A favorite is implemented as a MATLAB shortcut, so the dialog box is the same as for the **Shortcut Editor**.

Favorites from previous releases are not migrated to a new release.

#### Go to Favorites

Select the **Favorites** menu to view the list of pages you previously designated as favorites (bookmarks). Select an entry and that page appears in the display pane.

#### Organize Favorites

You can rename, remove, and reorder the listing of favorites. Select **Favorites -> Organize Favorites**. For more information, click **Help** in the **Organize Favorites** dialog box.


## View Documentation in the Help Browser



After finding documentation with the Help Navigator, view the documentation in the display pane. The features available to you while viewing the documentation are



- “Browse to Other Pages” on page 4-20
- “Links” on page 4-21
- “Find Text in Displayed Pages” on page 4-21
- “Copy Information” on page 4-22
- “Evaluate a Selection” on page 4-22
- “View the Page Source (HTML)” on page 4-22
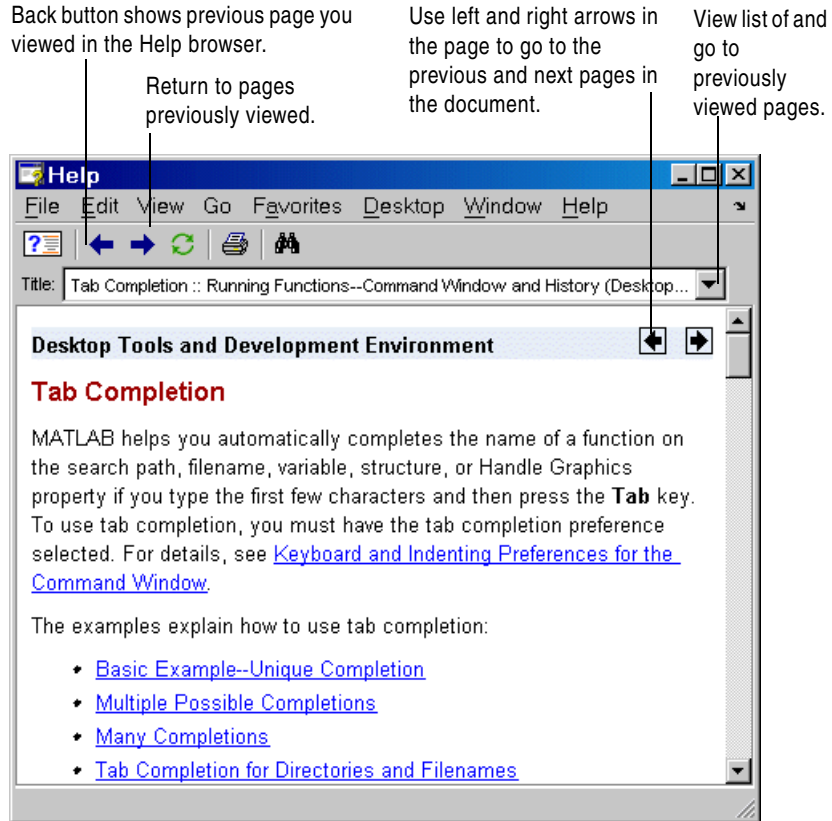
## Browse to Other Pages

Use the arrow buttons in the page and in the toolbar to go to other pages.



View the next page in a document by clicking the right arrow  at the top or bottom of the page. View the previous page in a document by clicking the left arrow  at the top or bottom of the page. These arrows allow you to move forward or backward within a single document. The arrows at the bottom of the page are labeled with the title of the page they go to.

View the page previously shown by clicking the back button  in the display pane toolbar. After using the back button, view the next page shown by clicking the forward button  in the display pane toolbar. These buttons work like the


forward and back buttons of popular Web browsers. You can also go back or forward by right-clicking a page and selecting **Back** or **Forward** from the context menu.

## Links

Click links in the displayed page to get more information on the subject. Links appear underlined and in blue. Visited links appear in purple. Links to the Web display the linked page in your system Web browser. Click the middle mouse button to open the linked page in a separate window.

## Find Text in Displayed Pages

You can find a phrase in the currently displayed page:

- 1 Click the binocular icon . In the resulting **Find** dialog box, type the word or phrase you are looking for. You can type a partial word, for example, `preference` to find all occurrences of `preference` and `preferences`. Use the check boxes to specify options. Click **Next**.

The page scrolls to the first occurrence of the phrase in the page and highlights it.

- 2 Press **Next** or **Previous** in the **Find** dialog box to find more occurrences in that page.

See “Search Documentation with the Help Browser” on page 4-12 for instructions on looking through all the documentation instead of just one page.

### **Copy Information**

To copy information from the display pane, such as code in an example, first select the information. Then right-click and select **Copy** from the context menu. You can then paste the information into another tool, such as the Command Window or Editor, or into another application, such as a word processing application.

### **Evaluate a Selection**

To run code examples that appear in the documentation, select the code in the display pane. Then right-click and select **Evaluate Selection** from the context menu. The statements execute in the Command Window.

### **View the Page Source (HTML)**

To view the HTML source for the currently displayed page, select **View -> Page Source**. A read-only HTML version of the page appears in a separate window. You can copy selections from the HTML source and paste them into other tools like the Editor or Command Window, or into other applications.



## Demos in the Help Browser

MATLAB and related products include demos that you can access from the Help browser **Demos** tab. There three basic kinds of demos:

- Video tutorials play a movie file highlighting features, such as the demos for the MATLAB Desktop Tools and Development Environment.
- Published M-files are HTML files that illustrate an example, step-by-step. An example is the MATLAB Programming Nested Functions demo.
- M-file GUIs are interactive tools for exploring a feature. An example is the MATLAB Graphics Visualizing Sound demo.

The M-file code for the demos (except video tutorials) is available for you to view and copy for use in your own applications.

See also **Examples** for each product in the **Contents** pane. These examples are similar to demos but are integrated in the documentation.

### Using Demos

To access the available demos for the products you have installed:

- 1** Click the **Demos** tab in the **Help Navigator**.

You can also access demos from the **Start** button, using the demo function, or from the **Help** menu for some tools.

- 2** Click the **+** for a product area to list the products or categories that have demos. Then click **+** for a product or product category to list its demos.
- 3** Select a specific demo to use it. Information about the demo, including instructions for running it, appears in the display pane.

Expand the listing for a product and category to see its demos.

Select a demo to see details about it.

Access demos for all installed products using the **Demos** tab.

The code for the demo is in the specified file. Click this link to view the M-file code in the Editor.

Click this link to run the demo.

**Help**  
File Edit View Go Favorites Desktop Window Help

Help Navigator  
Contents Index Search Demos

Getting Started with Demos  
MATLAB  
Mathematics  
Graphics  
3-D Visualization  
Programming  
Manipulating Multidimensional Arrays  
Structures  
Function Functions  
Nested Function Examples  
Anonymous Function Handles  
Reading Text Files  
Desktop Tools and Development  
Creating Graphical User Interfaces  
External Interfaces  
Gallery  
Other Demos  
New Features in Version 7.0  
MATLAB Report Generator

Title: MATLAB Demo: nesteddemo

[View code for nesteddemo](#) [Run this demo](#)

### Nested Function Examples

This gives examples of how nested functions can be used for easy data sharing, as well as providing a new way to create customized functions.

#### Contents

- [Example 1: Sharing data](#)
- [Example 2: Creating customized functions](#)
- [Example 3: Creating customized functions with static variables](#)

#### Example 1: Sharing data


Let's first take a look at `taxDemo.m`, which contains a nested function:

```
type taxDemo.m
```

**4** You can

- View the source code (M-file) for the demo—click the **View code** link on the top left. For the example shown, it is `nestdedemo.m`. The M-file opens in the MATLAB Editor.
- Run the demo—click the link at the top right, **Run this Demo**. You can instead double-click the demo in the Navigator pane to run it.

When you run `nestdedemo`, the following appears. Follow the instructions shown to continue running the demo. In this example, click **Start >>**.

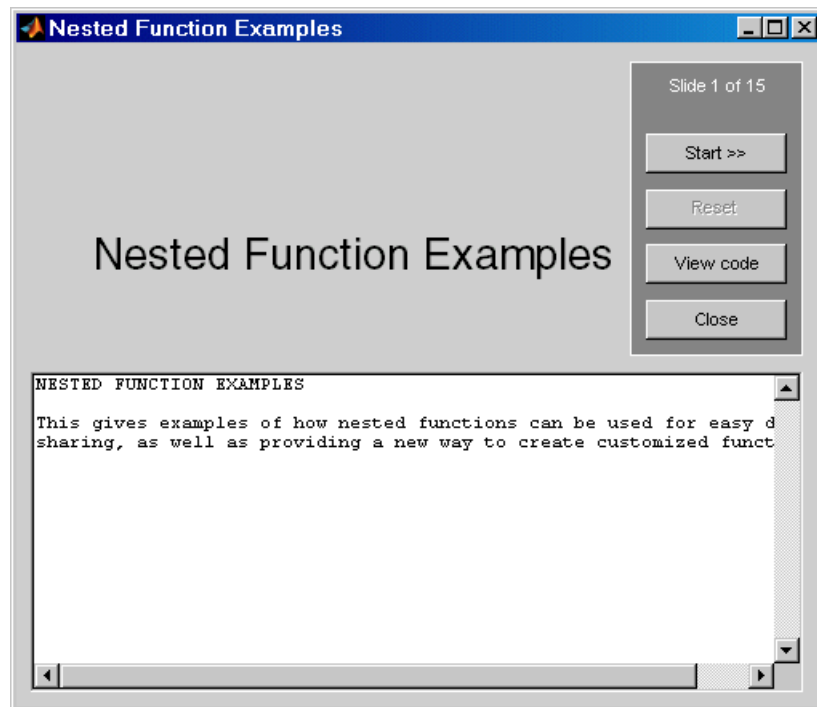

### Notes About Demos

Some Help browser features do not apply to demos:

- You cannot use the **Search** tab to look for words or code contained in the demos. You can use the Find Files tool to search for code in M-file demo files.
- You cannot use **Add to Favorites** to bookmark some demos.
- The product filter does not apply to demos.

### Function Alternative

To view the **Demos** in the Help browser, type `demo` in the Command Window. You can go directly to the demos for a specific product. For example

```
demo toolbox signal
```

opens the **Demos** listing for the Signal Processing Toolbox.

To run a demo, type the demo name at the command line. For example, type

```
vibes
```

to run a visualization demonstration showing an animated L-shaped membrane.

**Running Published M-File Demos.** To run published M-file demos from the command line, type `playshow` followed by the demo name. To determine if a demo is a published M-file type, view the H1 line for the demo M-file, that is, the first comment line. If it begins with two comment symbols (`%%`), it is a published M-file demo. For example, the first line in `nesteddemo` begins with two comment symbols:

```
%% Nested Function Examples
```

Therefore, type `playshow nesteddemo` to run the demo.

### Adding Your Own Demos

You can add your own demos so they appear under the **Demos** tab. For details, see “Adding Your Own Toolboxes to the Development Environment” in the online documentation.

## Preferences for the Help Browser

- “Product Filter” on page 4-27
- “PDF Reader—Specifying Its Location” on page 4-28
- “General—Keep Contents Synchronized” on page 4-28
- “Help Fonts Preferences—Specifying Font Name, Style, and Size” on page 4-29

### Product Filter

If you have MathWorks products in addition to MATLAB, such as Simulink, toolboxes, and blocksets, set the product filter to limit the product documentation used, making it easier to narrow searches, for example:

- 1** Select **File -> Preferences -> Help**.
- 2** Under **Product filter**, select the check box for **Enable product filter**. Click **Select products**.

The **Help Product Filter** dialog box opens.

- 3** Select the products whose documentation you want to appear in the Help Navigator. Click **OK**.

The Help Navigator updates to include only those products you specified. The product filter settings are remembered for your next MATLAB session.

- 4** When you want to use documentation for all installed products, in Help preferences, clear the check box for **Enable product filter**.

With the product filter enabled:

- **Contents** shows only the subset of products you specify.
- **Index** shows only index terms for the subset of products you specify.
- **Search** only looks through the subset of products you specify.
- Demos is not affected; demos for all installed products are always shown.

The **Release Notes** entry in **Help Product Filter** dialog box applies only the Release Notes overview document for a release, not to the Release Notes for an individual product.

### Example Using the Product Filter

If you do a search and know the information you are seeking is in MATLAB or the Communications Toolbox, in the **Help Product Filter**, click **Clear All** and then select MATLAB and Communications Toolbox.

The **Contents** only shows MATLAB and the Communications Toolbox documentation, the **Index** only shows entries for MATLAB and the Communications Toolbox, and the **Search** feature only looks in and shows results for MATLAB and the Communications Toolbox.

### PDF Reader—Specifying Its Location

If you want to view the PDF version of the documentation, use the link on the roadmap page for that product. To open the PDF file, the Help system needs to know the location of your PDF reader (for example, Adobe Acrobat).

For Windows systems, MATLAB reads the location from the registry, so you cannot specify its location using preferences.

For UNIX systems, when you installed MATLAB, it looked for your system's PDF reader. If found, MATLAB automatically supplied the PDF reader location to the **PDF reader** field in Help preferences. If MATLAB could not locate your PDF reader or if you moved your PDF reader since installation, change the location. Select **File -> Preferences -> Help**, and enter the location in the **PDF reader** field. Use the browse (...) button to navigate your file system to select the location.

### General—Keep Contents Synchronized

By default, the displayed page is synchronized with the **Contents** listing. For more information about this feature, see “Synchronize Contents Listing with Display Pane” on page 4-9. Use this preference to turn synchronization off.

Select **File -> Preferences -> Help**. Under **General**, clear the check box for **Keep contents tree synchronized with displayed document**. Select the check box to turn synchronization back on.

## Help Fonts Preferences—Specifying Font Name, Style, and Size

You can specify the font type, style, and size used in the Help Navigator and the display pane.

Use the same method as you would to specify fonts for any desktop tool—for more information, see “Fonts Preferences for Desktop Tools” on page 2-44. By default, the Help Navigator uses the desktop text font. The display pane is considered to be an HTML Proportional Text tool, and by default, uses the desktop text font.

This example changes the display pane font:

- 1** Select **File -> Preferences -> Fonts -> Custom**.
- 2** From the **Desktop tools** list, select **HTML Proportional Text**. The Help browser display pane is considered to be an HTML proportional text tool, as is the MATLAB Web browser. Changing the font preference affects both tools.
- 3** For **Font to use**, select **Custom**, then specify the font characteristics:
  - Type, for example, **SansSerif**
  - Style, for example, **bold**
  - Size in points, for example, **12 points**

After you make a selection, the **Sample** area shows how the font will look.


- 4** Click **OK**. The Help display pane fonts use the new settings. The MATLAB Web browser fonts will also use the new settings.

# Printed Documentation

Printed manuals are provided for the major releases of some products and tools. The online documentation often has information not included with the printed manuals and is often more current. If you want to purchase printed documentation, see the online store at the MathWorks Web site at <http://www.mathworks.com>.

You can print the current page displayed in the Help browser, or print a page or an entire book from the PDF version of the documentation.

## Printing a Page from the Help Browser

To print the page currently shown in the Help browser, select **File -> Print**, or click the print button  in the display pane toolbar. The **Print** dialog box appears.

The **Pages** field in the **Print** dialog box shows the total number of pages to be printed and lets you specify the range of pages you want to print. When there is more than one page, it means that multiple physical pages are needed to print the single page displayed in the Help browser.

Complete the dialog box and press **OK** to print the page.

## Printing the PDF Version of Documentation

If you need to print only a few pages and if the quality does not need to be equivalent to pages in a printed book, you can print directly from the MATLAB Help browser—see “Printing a Page from the Help Browser” on page 4-30.

If you need to print more than a few pages of documentation, or if you want the pages to appear as if they came from a printed book, print the PDF version of the documentation. PDF documentation is shown and printed using your PDF reader, usually Adobe Acrobat Reader. The PDF documentation reproduces the look and feel of the printed book, complete with fonts, graphics, formatting, and images. In the PDF document, use links from the table of contents, index, or within the document to go directly to the page of interest. Note that some documentation available from the Help browser is not available in PDF format.



---

**Note** The Help browser accesses PDF documentation from The MathWorks Web site. Therefore, you need Internet access to view or print PDF documentation.

---

- 1** In the Help browser, click the **Contents** tab and select a product, for example, MATLAB.

The roadmap page opens for that product, providing links to key documentation for that product.

- 2** Near the end of the roadmap page, listed under **Printing the Documentation Set**, are links for printing the documentation. Select the link for the item you want to print.

MATLAB accesses the selected document from The MathWorks Web site. Your PDF reader opens, displaying the documentation.

For PDF printing problems on UNIX platforms, check the Help preferences. See “PDF Reader—Specifying Its Location” on page 4-28 for more information.

- 3** To print the documentation, select **Print** from the **File** menu in your PDF reader.

## Help Functions

There are several help functions that provide forms of help different from the Help browser documentation, or provide alternative ways to access the Help browser information.

Function	Description
<code>dbtype</code>	Displays the M-file with line numbers. If you want to see only the input and output arguments for a function, use <code>dbtype function 1</code> , which displays the first line of the M-file.
<code>demo</code>	Displays the <b>Demos</b> pane in the Help browser, from which you can access demonstrations for the products you have installed. With an argument, runs the specified demo.
<code>doc</code>	Displays in the Help browser, the reference page for the specified function, block, or property. More extensive than help results, the reference page provides syntax, a description, examples, and links to related functions.
<code>docopt</code>	On UNIX systems, specifies Web browser information, used when displaying Internet Web pages.
<code>docsearch</code>	Run the Help browser search feature for the specified term.
<code>help</code>	Displays M-file help (a description and syntax) in the Command Window for the specified function or block.
<code>helpbrowser</code>	Opens the Help browser, the MATLAB interface for accessing documentation.
<code>helpdesk</code>	Opens the Help browser. In previous releases, helpdesk displayed the Help Desk, which was the precursor to the Help browser.
<code>helpwin</code>	Displays a list of all functions in the Help browser, and provides access to M-file help for the functions.

<b>Function</b>	<b>Description (Continued)</b>
lookfor	Displays in the Command Window a list and brief description of all functions whose brief description includes the specified keyword.
web	Opens the specified URL in the specified browser. Use <code>web</code> in your own M-files to display HTML documentation you create for your work.
whatsnew	Displays the Release Notes in the Help browser.

## View Function Reference Pages—the `doc` Function

To view the reference page for a function, block, or property in the Help browser, use `doc`. For example, type

```
doc format
```

to view the reference page for the `format` function.

### Overloaded Functions with the `doc` Function

When a function name is used in multiple products, it is said to be an overloaded function. The `doc` function displays the reference page for the first function on the MATLAB search path having that name, and displays a hyperlinked list of the overloaded functions in the Command Window.

For example, using the default search path

```
doc set
```

displays the reference page for the MATLAB `set` function in the Help browser, and in the Command Window, displays a hyperlinked list of the `set` functions residing in other directories, such as

```
database/set
```

which is the `set` function for the Database Toolbox. Click a link to go to that `set` reference page.

To directly get the reference page for an overloaded function, specify the name of the directory containing the function you want the reference page for, followed by the function name. For example, to display the reference page for the `set` function in the Database Toolbox, type

```
doc database/set
```

### Getting Help in the Command Window—the help Function

To quickly view a brief description and syntax for a function in the Command Window, use the `help` function. For example, typing

```
help bar
```

displays a description and syntax for the `bar` function in the Command Window. This is called the M-file help. For other arguments you can supply, see the reference page for `help`.

---

**Note** M-file help displayed in the Command Window uses all uppercase characters for the function and variable names to make them stand out from the rest of the text. When typing function names, however, use lowercase characters. Some functions for interfacing to Java do use mixed case; the M-file help accurately reflects that, and you should use mixed case when typing them.

---

If you need more information than the `help` function provides, use the `doc` function, which displays the reference page in the Help browser. It can include color, images, links, and more extensive examples than the M-file help. For example, typing

```
doc bar
```

displays the reference page for the `bar` function in the Help browser.

## Overloaded Functions with the help Function

When a function name is used in multiple products, it is said to be an overloaded function. The `help` function displays M-file help for the first function on the MATLAB search path having that name, and displays a hyperlinked list of the overloaded functions at the end.

For example, using the default search path

```
help set
```

displays M-file help for the MATLAB `set` function, and displays a hyperlinked list of the `set` functions residing in other directories, such as

```
database/set
```

which is the `set` function for the Database Toolbox. Click a link to display the M-file help for that `set` function.

To directly get help for an overloaded function, specify the name of the directory containing the function you want help for, followed by the function name. For example, to get help for the `set` function in the Database Toolbox, type

```
help database/set
```

### Help for Classes and Methods

To get help for a method, use

```
help classname.methodname
```

where `classname` is the fully qualified class. If you do not know the fully qualified class for the method, use `class(obj)`. Here, `methodname` is of the same class as the object `obj`. This example shows how to get help for the `lsb` method of the `fi` class in the Fixed-Point Toolbox.

```
a = fi(pi);  
class(a)  
ans =  
    embedded.fi
```

The fully qualified class for `lsb` is `embedded.fi`. Therefore, use

```
help embedded.fi.lsb
```

to display help for the `lsb` method.

To get help for a class, specify the fully qualified class. For example, to get help for the `fi` class, use

```
help embedded.fi
```

Help for the class is actually the help for the class's object constructor, in this case, `fi`.

### Creating M-File Help for Your Own M-Files

You can create M-file help for your own M-files and access it using the `help` command. See the `help` reference page for details.

### Directory Reports for Help

The Help Report and the Contents Report provide other ways of looking at and managing help for M-files—see “Directory Reports in Current Directory Browser” on page 7-11.

## Other Forms of Help

In addition to using the Help browser and help functions, there are the other forms of help for MATLAB and related products:

- “Documentation for Other Products” on page 4-37
- “Product-Specific Help Features” on page 4-37
- “User-Contributed M-Files” on page 4-38
- “Technical Support” on page 4-38
- “Newsgroup for MathWorks Products” on page 4-39
- “Other Resources for MATLAB Information” on page 4-39
- “Version and License Information” on page 4-40
- “Provide Feedback” on page 4-40

### Documentation for Other Products

The Help browser provides access to documentation for all products installed on your system. You can view any product’s online documentation at the MathWorks Web site at

<http://www.mathworks.com/access/helpdesk/help/helpdesk.shtml>.

### Product-Specific Help Features

In addition to the Help browser and help functions, some products and tools allow other methods for getting help. You will encounter some methods in the course of using a product, such as entries in the **Help** menu, **Help** buttons in dialog boxes, and selecting **Help** from a context menu. These methods all display context-sensitive help. Other methods for getting help, such as pressing the **F1** key, are described in the documentation for the product or tool that uses the method.

### User-Contributed M-Files

You can download M-files contributed by users and developers of MATLAB, Simulink, and related products from MATLAB Central. Before you write an M-file yourself, especially if it seems to be a more generic utility, check the list of contributed files to see if someone has already written it. These files are freely contributed and can be used without charge by anyone who downloads them. To view the files available to download, go to the MATLAB Central File Exchange page on The MathWorks Web site, <http://www.mathworks.com/matlabcentral/fileexchange/index.jsp>. You can access this in any desktop component via **Help -> Web Resources**.

If you write M-files that you think would be of use to others, consider submitting them to the MATLAB Central File Exchange via the Web page.

### Technical Support

MathWorks Technical Support provides help for product problems:

- Find specific Technical Support information using the Help browser **Search** feature. Run a search for a specified term. The end of the results list includes a link that runs the same search on the support database. This database, on The MathWorks Web site, provides the most up-to-date solutions for questions posed by users.
- Select **Technical Support Knowledge Base** from the **Help -> Web Resources** menu to go to the Technical Support Web page (<http://www.mathworks.com/support>). The page displays in your system's default Web browser. You can find out about other types of information such as third-party books, ask questions, make suggestions, and report possible bugs.
- If you cannot access the Web site, you can e-mail Technical Support using the address [support@mathworks.com](mailto:support@mathworks.com). You must provide your license number to obtain support. It is helpful if you also provide your operating system and MATLAB version number. You can obtain all of this information by running the `ver` function or by selecting **Help -> About**.



## Newsgroup for MathWorks Products

The Usenet newsgroup for MATLAB and related products, `comp.soft-sys.matlab`, (also known as `cssm`) is read by thousands of users worldwide. Access the newsgroup to ask for or provide help or advice. You can read and submit postings as well as view and search through a sizable archive of postings using the MATLAB Central Newsgroup Access Web page on The MathWorks Web site, <http://www.mathworks.com/matlabcentral>. You can access this via **Help** -> **Web Resources** from any desktop component.

First-time users to the newsgroup should read the newsgroup FAQ, linked to from that page. It is a good practice to try to solve your own problem using the documentation and Technical Support database before posting a question to the newsgroup. Be sure to post with a meaningful subject that briefly describes the nature of the issue.

## Other Resources for MATLAB Information

Following are some additional resources for help with MATLAB and related products.

- Newsletters—The MathWorks publishes News and Notes twice a year, containing feature articles, technical notes, and product information for MATLAB users. More frequently, the MathWorks issues MATLAB Digest, an electronic bulletin consisting of technical notes, solutions, and timely announcements to the user community. See <http://www.mathworks.com/company/newsletters/>.
- Books—There are hundreds of MATLAB based books. For a list with descriptions, see <http://www.mathworks.com/support/books/>.
- Seminars and Training—The MathWorks regularly presents free seminars on special topics conducted in various locations. Webinars on special topics are presented via the Web, and the MathWorks offers training classes for MATLAB and other products. For details, see <http://www.mathworks.com/company/events/>.
- `Mathtools.net`—A technical computing Web portal with links to many resources for MATLAB users. See <http://www.mathtools.net/>.

### Version and License Information

If you need the product version or license information, select **About** from the **Help** menu for that product. The version is displayed in an **About** dialog box. Click **Show License** in the dialog box to view license information. Note that the information displayed does not cover your specific license agreement. If the product does not have a **Help** menu, use the `ver` function. To see the license number for MATLAB, type `license` in the Command Window. See also the `ver`, `version`, and `license` functions.

### Provide Feedback

To report problems or provide comments or suggestions to The MathWorks about the documentation and help features, use the form on the Web. To access the form, go to the **Contents** pane in the Help browser. Select **Begin Here** from the top of the contents listing. Scroll to the bottom of the **Begin Here** page and click the link **Give Us Your Feedback**. Or go directly to the form at <http://www.mathworks.com/access/helpdesk/feedback/index.shtml>. Alternatively, you can send e-mail to `doc@mathworks.com`.

To suggest enhancements or provide feedback about MathWorks products, send e-mail to `suggest@mathworks.com`. To report problems, send e-mail to `bugs@mathworks.com` or contact Technical Support at <http://www.mathworks.com/support/>.

# Workspace, Search Path, and File Operations

---

If you are using the Help browser, watch the Workspace Browser video demo, the Array Editor video demo, and the Current Directory Browser video demo for an overview of the major functionality.

MATLAB Workspace (p. 5-2)

The workspace is the set of variables maintained in memory during a MATLAB session. Use the Workspace browser or equivalent functions to view the workspace.

Viewing and Editing Workspace  
Variables with the Array Editor  
(p. 5-10)

View and make changes to variables using the Array Editor.

Search Path (p. 5-18)

MATLAB uses a search path to find M-files and other MATLAB related files. View and change the path using the **Set Path** dialog box or equivalent functions.

File Management Operations (p. 5-29)

Search for, view, open, and make changes to MATLAB related directories and files, using the Current Directory browser or equivalent functions.

## MATLAB Workspace

The MATLAB workspace consists of the set of variables (named arrays) built up during a MATLAB session and stored in memory. You add variables to the workspace by using functions, running M-files, and loading saved workspaces. For example, if you type

```
t = 0:pi/4:2*pi;  
y = sin(t);
```

the workspace includes two variables, `y` and `t`, each having nine values.


You can perform workspace operations and related features using the Workspace browser. Equivalent functions are available and are documented with each feature of the Workspace browser. If you are using the Help browser, watch the Workspace browser video demo for an overview of the major functionality:

- “Opening the Workspace Browser” on page 5-3
- “Viewing and Editing Values in the Current Workspace” on page 5-3
- “Saving the Current Workspace” on page 5-4
- “Loading a Saved Workspace and Importing Data” on page 5-6
- “Changing and Copying Variable Names” on page 5-7
- “Clearing Workspace Variables” on page 5-7
- “Viewing Base and Function Workspaces Using the Stack” on page 5-8
- “Creating Graphics from the Workspace Browser” on page 5-8
- “Opening Variables and Objects for Viewing and Editing” on page 5-8
- “Preferences for the Workspace Browser” on page 5-9.

## Opening the Workspace Browser

To open the Workspace browser, select **Workspace** from the **Desktop** menu in the MATLAB desktop, or type workspace at the Command Window prompt.

The Workspace browser opens.

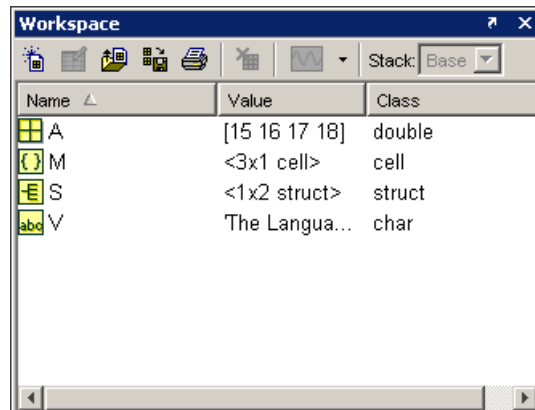

## Viewing and Editing Values in the Current Workspace

The Workspace browser shows the name of each variable, its value, its array size, its size in bytes, and the class. The icon for each variable denotes its class.

To resize the columns of information, drag the column header borders. To show or hide any of the columns, or to specify the sort order, select **View -> Choose Columns**.

You can select the column on which to sort as well as reverse the sort order of any column. Click a column heading to sort on that column. Click the column heading again to reverse the sort order in that column. For example, to sort on **Name**, click the column heading once. To change from ascending to descending, click the heading again. You cannot sort by the **Value** column in the Workspace browser.

You can edit values directly in the Workspace browser **Value** column. To edit a value, select the row to change in the **Value** column and type in the new value.

### Function Alternative

Use `who` to list the current workspace variables. Use `whos` to list the variables and information about their size and class. For example:

```
who
Your variables are:
A M S V

whos
Name      Size      Bytes  Class

A         1x4        32    double array
M         3x1       202    cell array
S         1x2       598    struct array
V         1x35       70    char array
```

```
Grand total is 76 elements using 902 bytes
```

Use `exist` to see if the specified variable is in the workspace.

### Saving the Current Workspace

The workspace is not maintained across MATLAB sessions. When you quit MATLAB, the workspace is cleared. You can save any or all of the variables in the current workspace to a MAT-file, which is a MATLAB specific binary file. You can then load the MAT-file at a later time during the current or another session to reuse the workspace variables. MAT-files use a `.mat` extension.

---

**Note** The `.mat` extension is also used by Microsoft Access.

---

## Saving All Variables

To save all of the workspace variables using the Workspace browser:

- 1 From the **File** menu, select **Save Workspace As**, or click the save button  in the Workspace browser toolbar.

The **Save** dialog box opens.

- 2 Specify the location and **File name**. MATLAB automatically supplies the .mat extension.
- 3 Click **Save**.

The workspace variables are saved under the MAT-file name you specified. You can also save the workspace variables from the desktop by selecting **Save Workspace As** from the **File** menu.

## Saving Selected Variables

To save some but not all of the current workspace variables:

- 1 Select the variable in the Workspace browser. To select multiple variables, **Shift**+click or **Ctrl**+click.
- 2 Right-click and from the context menu, select **Save As**.

The **Save to MAT-File** dialog box opens.

- 3 Specify the location and **File name**. MATLAB automatically supplies the .mat extension.
- 4 Click **Save**.

The workspace variables are saved under the MAT-file name you specified. To specify preferences for saving MAT-files, see “MAT-Files” on page 2-56.

### Function Alternative

To save workspace variables, use the `save` function followed by the filename you want to save to. For example,


```
save('june10')
```

saves all current workspace variables to the file `june10.mat`.

If you don't specify a filename, the workspace is saved to `matlab.mat` in the current working directory. You can specify which variables to save, as well as control the format in which the data is stored, such as ASCII. For these and other forms of the function, see the reference page for `save`. For a related function, see `genvarname`. MATLAB provides additional functions for saving information—see the Import Wizard documentation.

### Loading a Saved Workspace and Importing Data

To load saved variables into the workspace:

- 1 Click the load data file button  on the toolbar in the Workspace browser.

The **Open** dialog box opens.

- 2 Select the MAT-file you want to load and click **Open**.

The variables and their values, as stored in the MAT-file, are loaded into the current workspace. If any variables being loaded have the same names as variables in the current workspace, the values from the MAT-file replace the values in the current workspace. Any variables in the MAT-file that are not in the workspace are added to the workspace.

### Function Alternative

Use `load` to open a saved workspace. For example,

```
load('june10')
```

loads all workspace variables from the file `june10.mat`.



## Importing Data

MATLAB provides other methods and functions for loading information. You can use one of these methods, the Import Wizard, from the Workspace browser—select **Edit -> Paste Special** or use **Ctrl+V** to import data to MATLAB using the Import Wizard. For more information on the Import Wizard and other methods for loading information, see the Import Wizard documentation.

## Changing and Copying Variable Names


To rename a variable in the workspace, right-click the variable in the Workspace browser and select **Rename** from the context menu. Type the new variable name over the existing name and press **Enter** or **Return**.

To copy variable names to the clipboard, select the workspace variables and select **Edit -> Copy**. You can then paste the names, for example, into the Command Window. Multiple variables are comma separated.

## Clearing Workspace Variables

You can clear a variable, which removes it from the workspace.

To clear a variable using the Workspace browser:

- 1 In the Workspace browser, select the variable, or **Shift**+click or **Ctrl**+click to select multiple variables. To select all variables, choose **Select All** from the **Edit** or context menus.
- 2 Press the **Delete** key on your keyboard or click the delete button  on the Workspace browser toolbar.
- 3 A confirmation dialog box may appear. If it does, click **Yes** to clear the variables.

The confirmation dialog box appears if you specify it as a preference. See “Preferences for the Workspace Browser” on page 5-9 to change the preference.

### Function Alternative

Use the `clear` function to clear variables from the workspace. For example,


```
clear A M
```

clears the variables `A` and `M` from the workspace.

### Viewing Base and Function Workspaces Using the Stack

When you run M-files, MATLAB assigns each function its own workspace, called the function workspace, which is separate from the MATLAB base workspace. To access the base and function workspaces when debugging M-files, use the **Stack** field in the Workspace browser. The **Stack** field is only available in debug mode and otherwise is grayed out. The **Stack** field is also accessible from the Array Editor and the Editor/Debugger. See “Debugging M-Files” on page 6-33 for more information.

### Creating Graphics from the Workspace Browser

From the Workspace browser, you can generate a graph of a variable. To create a graph, click the graph button  on the Workspace browser toolbar and select the graph type. The graph appears in a figure window.

In addition, you can right-click the variable you want to graph. From the context menu, choose the type of graph you want to create. You can also select multiple variables to graph together.

For more information about creating graphs in MATLAB, see the Using MATLAB Graphics documentation.

### Opening Variables and Objects for Viewing and Editing

In the Workspace browser, double-click a variable and it opens in the Array Editor, where you can view and edit the contents of the variable. See “Viewing and Editing Workspace Variables with the Array Editor” on page 5-10 for more information about opening arrays.

Some toolboxes allow you to double-click an object in the Workspace browser to open a viewer or other tool appropriate for that object. For details, see the toolbox documentation for that object type.

## Preferences for the Workspace Browser

You can specify whether or not you want a confirmation dialog box to appear when you clear variables using the Workspace browser. Select **File -> Preferences -> Workspace**. If you want a confirmation dialog box to appear when you delete a variable, select the **Show confirmation dialog when deleting variables** check box.

# Viewing and Editing Workspace Variables with the Array Editor


Use the Array Editor to view and edit a visual representation of one or two-dimensional numeric arrays, strings, cell arrays of strings, and structures. If you are using the Help browser, watch the Array Editor video demo for an overview of the major functionality.

The features of the Array Editor are


- “Opening the Array Editor” on page 5-10
- “Navigating in the Array Editor” on page 5-12
- “Changing Array Size, Content, and Format of Elements in the Array Editor” on page 5-12
- “Cut, Copy, Paste, and Delete in the Array Editor” on page 5-13
- “Exchanging Data with the Command Window” on page 5-16
- “Exchanging Data with Excel” on page 5-16
- “Creating Graphs and Variables from the Current Selection” on page 5-16
- “Preferences for the Array Editor” on page 5-16

## Opening the Array Editor

You can open the Array Editor from the Workspace browser:

- 1 In the Workspace browser, select the variable you want to open. **Shift**+click or **Ctrl**+click to select multiple variables, or use **Ctrl+A** to select all variables to open.
- 2 Click the open selection button  on the toolbar. For one variable, you can also open it by double-clicking it.

The Array Editor opens, displaying the values for the selected variable.

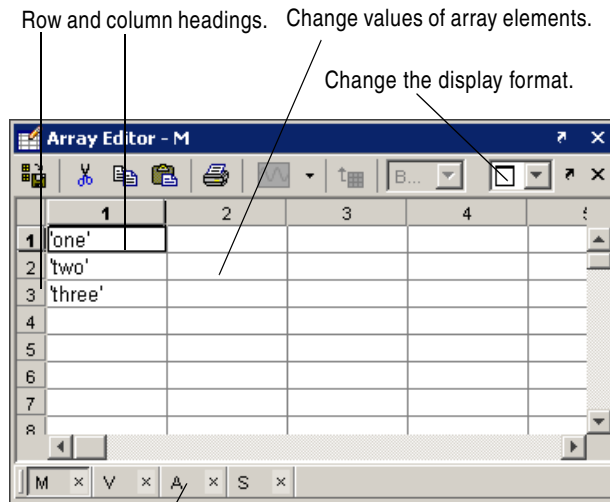

Use the tabs to view the different variables you have open in the Array Editor.

Repeat the steps to open additional variables in the Array Editor. Access each variable via its tab at the bottom of the window, or use the **Window** menu.

### Function Alternatives

To open a variable in the Array Editor, use `openvar` with the name of the variable you want to open as the argument. For example, type

```
openvar('M')
```

MATLAB opens M in the Array Editor.

To see the contents of a variable in the workspace, just type the variable name at the Command Window prompt. For example, type

```
M
```

and MATLAB returns

```
M =
'one'
'two'
'three'
```

## Navigating in the Array Editor

Use the following keys to move among elements in the Array Editor. Navigating in the Array Editor is much like navigating in Microsoft Excel.

Key	Result
<b>Enter</b>	Commit any changes to the element and move to next element, where next element is specified using “Preferences for the Array Editor” on page 5-16 (default is down)
<b>Tab</b>	Move right  Within a selection, also moves from the last column to the first column in the next row
<b>Shift+Enter</b> or <b>Shift+Tab</b>	Move in opposite direction of <b>Enter</b> or <b>Tab</b>
<b>Page Up</b>	Move up m rows, where m is the number of visible rows
<b>Page Down</b>	Move down m rows, where m is the number of visible rows
<b>Home</b>	Move to column 1
<b>Ctrl+Home</b>	Move to row 1, column 1
<b>Shift+Home</b>	Select to column 1
<b>End</b>	Move to last column in current row

## Changing Array Size, Content, and Format of Elements in the Array Editor

To increase the size of an array, scroll to the desired location in the array and enter a value. The array will automatically expand to accommodate the new value. Empty cells are filled with zeros, if numeric, or empty arrays, if a cell array. To decrease the size of an array, select the rows or columns that you want to remove by clicking in the row or column header to select the entire row, right-clicking, and selecting **Delete**.

To change the value of an element in the Array Editor, click in that element and type a new value. Press **Enter** or **Return**, or click in another element to make the change take effect. You can specify where the cursor moves to after you press **Enter**—see “Preferences for the Array Editor” on page 5-16.

If you want to change the display format for the Array Editor, select the **View** menu and choose a format. To change the default format for future use, use the **Preferences** dialog. For more information, see “Preferences for the Array Editor” on page 5-16.

If you opened an existing MAT-file and made changes to it using the Array Editor, save that MAT-file if you want the changes to be saved. For instructions, see “Saving the Current Workspace” on page 5-4.




## **Cut, Copy, Paste, and Delete in the Array Editor**

You can cut or copy selected elements, rows, and columns in an array and paste them to another position in that or another open array. To select a column or row, click in the row or column heading (the element that shows the row or column number). **Shift**+click to choose contiguous elements, rows, or columns in the array, or **Ctrl+A** to select all elements. For the cut, copy, and paste operations, use the **Edit** menu, the context menu, or the toolbar buttons.

When you cut elements, the value of each element you cut becomes 0 if numeric or [] if a character array. After cutting, select the elements whose value you want to replace with the cut elements and then choose **Paste**. If the shape of the elements you cut differs from the shape of the elements into which you are pasting, the Array Editor pastes all the elements, either by expanding the selection to be pasted into, or by expanding the array size to allow all the elements to be pasted. Pasting copied elements is the same as pasting cut elements, but the elements copied maintain their value rather than becoming 0.

### Example Copying and Pasting Array Elements




In this example, two elements are copied but the selected area for pasting is only one element, so the Array Editor expands the selected area for pasting.

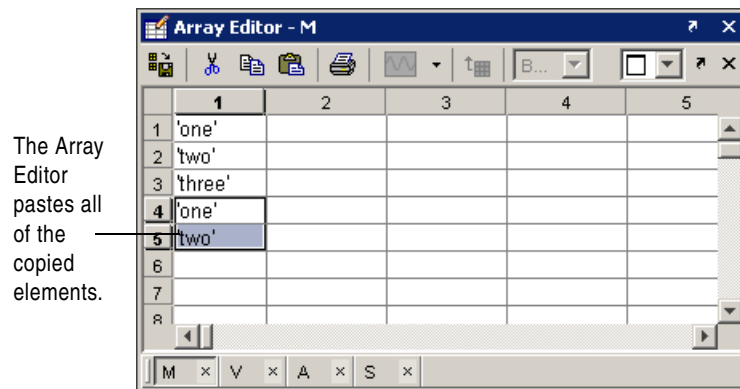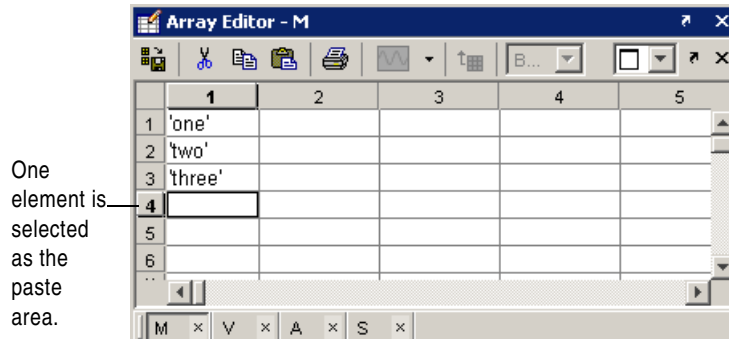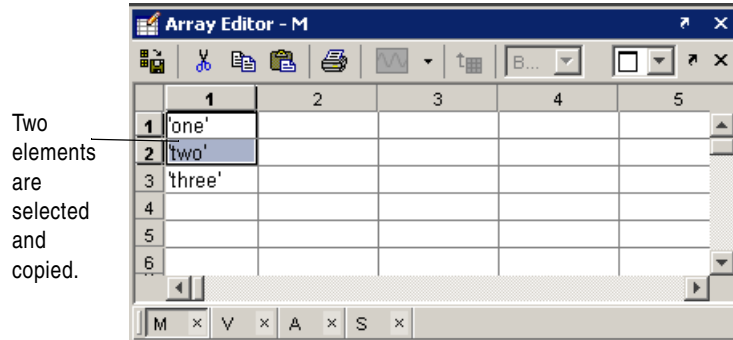



## Example Cutting and Pasting Array Elements

In this example, the area selected for pasting requires the Array Editor to expand the array size in order for all cut elements to be pasted.

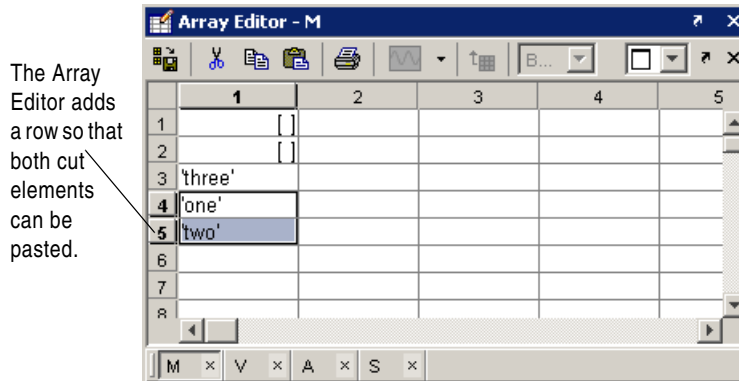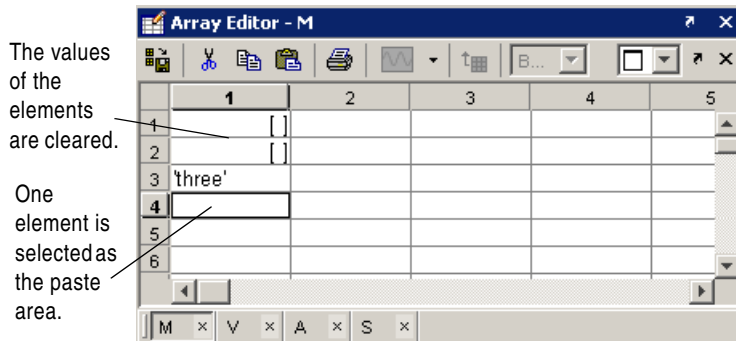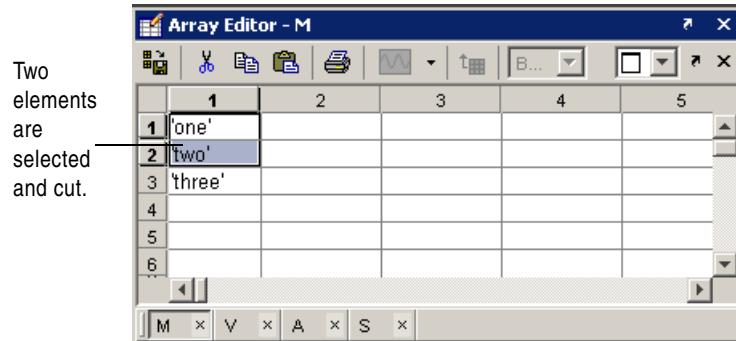

### Deleting Elements, Rows and Columns

You can clear elements, rows, or columns in the array by selecting them and then selecting **Delete** from the **Edit** menu or context menu. When you delete cells, a dialog box appears asking how you want the remaining cells to shift.

### Exchanging Data with the Command Window

You can copy data from the Array Editor and paste it into the Command Window. You can also copy a value from the Command Window and paste it into an element in the Array Editor. Be sure the data types are compatible. For example, you cannot paste text from the Command Window into a numeric array in the Array Editor.

### Exchanging Data with Excel

You can cut or copy cells from Microsoft Excel and paste them into the Array Editor. You can also cut or copy elements from the Array Editor and paste them into Excel.

Be sure the data types are compatible. For example, you cannot paste text from Excel into a numeric array in the Array Editor.

### Creating Graphs and Variables from the Current Selection

You can create graphs and new variables from the Array Editor. To create a graph, select a cell, row, or column, and in the right-click context menu, choose the graph type. To create a new variable, select a cell, row, or column in the Array Editor, right-click, and from the context menu, select **Create Variable from Selection**.

### Preferences for the Array Editor

To set preferences for the Array Editor, select **Preferences** from the **File** menu. The **Preferences** dialog box opens showing **Array Editor Preferences**.

### Default Format

Specify the output format of numeric values displayed in the Array Editor. This affects only how numbers are displayed, not how MATLAB computes or saves them. For more information, see the reference page for format.

## Editing

You can specify where the cursor moves to after you type in an element and press **Enter**:

- If you want the cursor to remain at the element where you just typed, clear the **Move selection after Enter** check box.
- If you want the cursor to move to another element, select the **Move selection after Enter** check box, and then use **Direction** to specify how you want the cursor to move. For example, if you want the cursor to move right one element after you press **Enter**, select **Right**.

# Search Path

This section covers the following topics:

- “About the Search Path” on page 5-18
- “How the Search Path Determines Which Function to Use” on page 5-19
- “How MATLAB Finds the Search Path, pathdef.m” on page 5-20
- “Viewing and Setting the Search Path” on page 5-20
- “Using the Path in Future Sessions” on page 5-26
- “Recovering from Problems with the Search Path” on page 5-27

## About the Search Path

MATLAB uses a *search path* to find M-files and other MATLAB related files, which are organized in directories on your file system. By default, the files supplied with MATLAB and MathWorks products are included in the search path. These are all of the directories and files under `$matlabroot/toolbox`.

Any file you want to run in MATLAB must reside in a directory that is on the search path, or in the current directory. If you create any MATLAB related files, add the directories containing the files to the MATLAB search path. For instructions to view the search path and add directories to it, see “Viewing and Setting the Search Path” on page 5-20, including “Caution Against Saving Files in `$matlabroot/toolbox`” on page 5-25.

The search path is also referred to as the *MATLAB path*. Directories included are considered to be *on the path*. When you include a directory in the search path, you *add it to the path*. Subdirectories must be explicitly added to the path; they are not on the path just because their parent directories are.

## How the Search Path Determines Which Function to Use

The order of directories on the path is relevant. MATLAB looks for a named element, for example, `foo`, as described here. If you enter `foo` at the MATLAB prompt, MATLAB performs the following actions:

- 1 Looks for `foo` as a variable.
- 2 Looks in the current directory for a file named `foo.m`.
- 3 Searches the directories on the MATLAB search path, in order, for `foo.bi` (built-in function) or `foo.m`.

If there is more than one function with the same name, the order of directories on the path determines which of those functions MATLAB uses. When MATLAB looks for that function, it uses the first one found in the search path:

- To use a function with the same name that is located in a directory further down on the search path, called a *shadowed* function, make its location the current directory. For M-file scripts, you can use `run` with the full pathname for the M-file. For example, use `run d:/myfiles/foo.m` to ensure that version of `foo` runs.
- If you are not sure of the function MATLAB is using, run `which` for a specified function and MATLAB returns the full path to the function.

Although the actual search path rules are more complicated because of the restricted scope of private functions, subfunctions, and object-oriented functions, this simplified perspective is accurate for the ordinary M-files you usually work with. For more information, see “Determining Which Function Is Called” in MATLAB Programming documentation.


### How MATLAB Finds the Search Path, `pathdef.m`

The search path is stored in the file `pathdef.m`, which by default, is located in `$matlabroot/toolbox/local`. You can store it in the MATLAB startup directory, and modify it for the current session or for all future sessions.

When MATLAB starts, it looks for a `pathdef.m` file in its startup directory. If none is found, it uses `pathdef.m` in `$matlabroot/toolbox/local`. MATLAB modifies the path based on any path statements in a `startup.m` file. During a session, you can save changes to the path using the **Set Path** dialog box or the `savepath` function, and MATLAB uses the path you saved to for the remainder of the session. If MATLAB finds a `pathdef.m` in the current directory, it uses that version instead. To avoid problems, do not maintain a `pathdef.m` file in a directory other than the MATLAB startup directory or `$matlabroot/toolbox/local`.

### Viewing and Setting the Search Path

Use the **Set Path** dialog box to view and modify the MATLAB search path. Equivalent functions are documented for each feature of the **Set Path** dialog box. Select **Set Path** from the **File** menu, or type `pathtool` at the Command Window prompt. The **Set Path** dialog box opens.

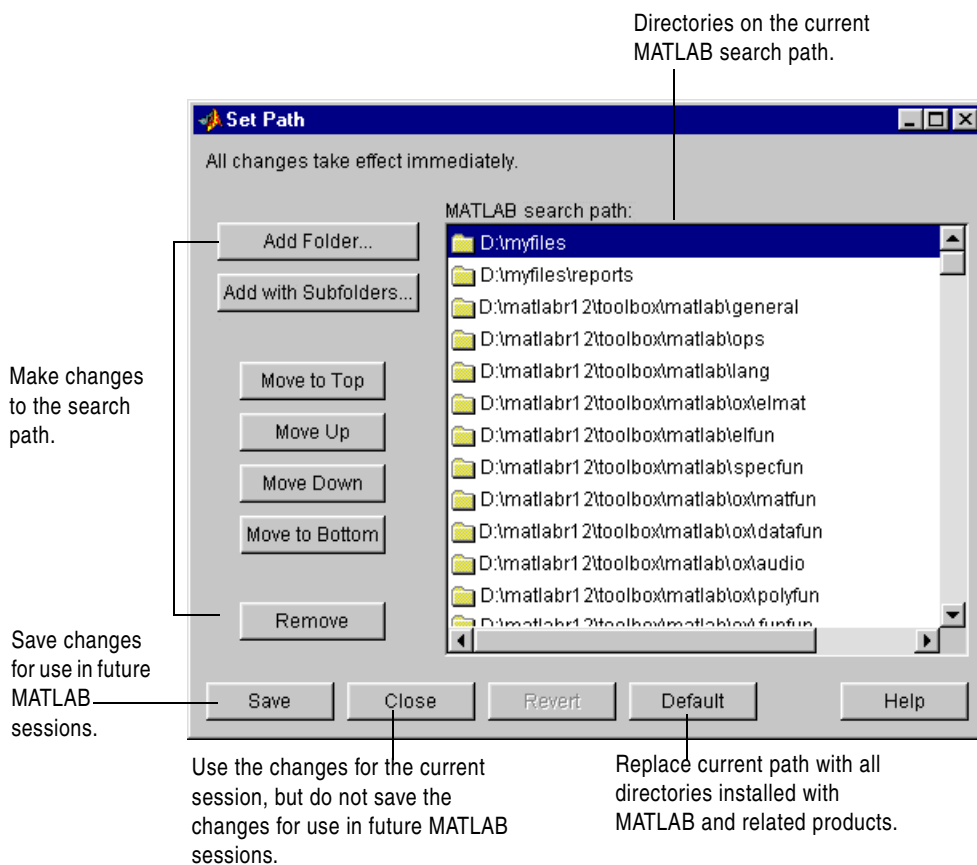

Use the **Set Path** dialog box for the following actions. Equivalent functions are listed as well:

- “Viewing the Search Path” on page 5-22
- “Adding Directories to the Search Path” on page 5-22
- “Moving Directories Within the Search Path” on page 5-23
- “Removing Directories from the Search Path” on page 5-24
- “Restoring the Default Search Path” on page 5-24
- “Reverting to the Previous Path” on page 5-25
- “Saving Settings to the Path” on page 5-25

See also

- “About the Search Path” on page 5-18 for background information
- “Using the Path in Future Sessions” on page 5-26 for options
- “Recovering from Problems with the Search Path” on page 5-27

### Viewing the Search Path

The **MATLAB search path** field in the **Set Path** dialog box lists all of the directories on the search path. The top of the list is the start of the search path, while the bottom of the list is the end.

**Function Alternative.** Use the `path` function to view the search path.

### Adding Directories to the Search Path

Add directories to the search path when you want to run M-files in those directories.

To add directories to the MATLAB search path using the **Set Path** dialog box:

- 1 Click the **Add Folder** or the **Add with Subfolders** button.
  - If you want to add only the selected directory but do not want to add all of its subdirectories, click **Add Folder**.
  - If you want to add the selected directory and all of its subdirectories, click **Add with Subfolders**.

The **Browse for Folder** dialog box opens.



- 2** In the **Browse for Folder** dialog box, use the view of your file system to select the directory to add, and then click **OK**.

The selected directory, and subdirectories if specified in step 1, are added to the top of the search path.

- 3** To use the newly modified search path in future sessions, click **Save**. For more information about saving the path, see “Saving Settings to the Path” on page 5-25.
- 4** Click **Close**. If you did not save the changes in the previous step, the directories you added remain on the search path until you end the current MATLAB session.

You cannot add method directories (directories that start with @) and private directories directly to the search path. Instead, add their parent directories using the **Add with Subfolders** button.

**Adding Directories to the Path from the Current Directory Browser.** In the Current Directory browser, select the directory, right-click, and select **Add to Path** from the context menu. Then select one of the submenus, for example, **Selected Folder and Subfolders**.

**Function Alternative.** To add directories to the top or the end of the search path, use `addpath`. The `addpath` function offers an option to get the path as a string and to concatenate multiple strings to form a new path.

You can include `addpath` statements in your startup M-file to automatically modify the path when MATLAB starts. For details, see “Modifying the Path in a startup.m File” on page 5-26.

### Moving Directories Within the Search Path

The order of files on the search path is relevant—for more information, see “How the Search Path Determines Which Function to Use” on page 5-19.

To modify the order of directories within the search path:

- 1** Select the directory or directories you want to move.
- 2** Click one of the **Move** buttons, such as **Move to Top**. The order of the directories changes.

- 3 To use the newly modified search path in future sessions, click **Save**. For more information about saving the path, see “Saving Settings to the Path” on page 5-25.
- 4 Click **Close**. If you did not save the changes in the previous step, the new order of files on the search path remains in effect until you end the current MATLAB session.

**Function Alternative.** While there is not a specific function to move directories, you can edit the `pathdef.m` file with any text editor to change the order of the directories. Use caution when editing the file so that you do not make MATLAB and toolbox functions unusable.

### Removing Directories from the Search Path

To remove directories from the MATLAB search path using the **Set Path** dialog box:

- 1 Select the directories to remove.
- 2 Click **Remove**. The directories are removed from the path.
- 3 To use the newly modified search path in future sessions, click **Save**. For more information about saving the path, see “Saving Settings to the Path” on page 5-25.
- 4 Click **Close**. If you did not save the changes in the previous step, the directories are removed from the search path until you end the current MATLAB session.

**Function Alternative.** To remove directories from the search path, use `rmpath`.

You can include `rmpath` statements in your startup M-file to automatically modify the path when MATLAB starts. For details see “Modifying the Path in a startup.m File” on page 5-26.

### Restoring the Default Search Path

To restore the default search path, click **Default** in the **Set Path** dialog box. This changes the search path so that it includes only the directories installed with MATLAB and related products.

## Reverting to the Previous Path

To restore the previous path, click **Revert** in the **Set Path** dialog box. This cancels any unsaved changes you have made in the **Set Path** dialog box.

## Saving Settings to the Path

When you make changes to the search path, they remain in effect during the current MATLAB session. To keep the changes in effect for subsequent sessions, you need to save them. To save changes using the **Set Path** dialog box, click **Save**.

If you want to automatically use this search path in future sessions, save the path to your MATLAB startup directory, which saves `pathdef.m` to that location. You can save the changes to the default `pathdef.m` file, in `$matlabroot/toolbox/local` if you have write permission for that directory but see the following caution. Alternatively, you can include `addpath` and `rmpath` statements in a `startup.m` file, which avoids some problems you might have with saving the path, for example, using the same path with both Windows and UNIX platforms. For more information, see “Using the Path in Future Sessions” on page 5-26.

**Caution Against Saving Files in `$matlabroot/toolbox`.** Save any M-files you create and any MathWorks-supplied M-files that you edit in a directory that is not in the `$matlabroot/toolbox` directory tree. If you keep your files in `$matlabroot/toolbox` directories, they can be overwritten when you install a new version of MATLAB. Also note that locations of files in the `$matlabroot/toolbox` directory tree are loaded and cached in memory at the beginning of each MATLAB session to improve performance. If you save files to `$matlabroot/toolbox` directories using an external editor or add or remove in from these directories using file system operations, run `rehash toolbox` before you use the files in the current session. If you make changes to existing files in `$matlabroot/toolbox` directories using an external editor, run `clear functionname` before you use the files in the current session. For more information, see `rehash` or “Toolbox Path Caching in MATLAB” on page 1-10.

**Function Alternative.** Use `savepath` to save the current path to `pathdef.m`. Locate `pathdef.m` in your MATLAB startup directory to automatically use it in future sessions. Consider using `savepath` in your `finish.m` file. To modify the default path upon startup, include `addpath` and `rmpath` functions in your `startup.m` file. For more information, see “Modifying the Path in a startup.m File” on page 5-26.

### Using the Path in Future Sessions

There are three basic ways for MATLAB to automatically use a search path you specify, each with advantages and disadvantages:

- “Modifying the Path in a startup.m File” on page 5-26
- “Saving the Path in the MATLAB Startup Directory” on page 5-26
- “Saving the Path in \$matlabroot/toolbox/local” on page 5-27

For background information, see “How MATLAB Finds the Search Path, pathdef.m” on page 5-20.

### Modifying the Path in a startup.m File

Put `addpath` and `rmpath` statements in a `startup.m` file, and include the startup file in MATLAB’s startup directory. When MATLAB starts, it uses the search path defined in `pathdef.m` in `$matlabroot/toolbox/local` and modifies it based on the commands in the `startup.m` file.

By maintaining an unaltered `pathdef.m` in `$matlabroot/toolbox/local`, you avoid inadvertently removing directories supplied by The MathWorks from the path. This method continues working even when you update to a new version of MATLAB. If you run MATLAB on both Windows and UNIX platforms, this method works well—for example, for each platform, include separate `addpath` sections in the `startup.m` file, with each section preceded by an `ispcc` or `isunix` statement.

One disadvantage of this method is that changes you make to the path using the **Set Path** dialog box are not incorporated in the `startup.m` file.

### Saving the Path in the MATLAB Startup Directory

Copy `pathdef.m` from `$matlabroot/toolbox/local` to the MATLAB startup directory. Make changes to the path using the **Set Path** dialog box, and with `addpath` and `rmpath` functions—choose whichever suits your needs. You can use this method if you do not have write access to `$matlabroot/toolbox/local`.

There are some disadvantages to this method. You might inadvertently remove directories supplied by The MathWorks from the path. When you update to a new version of MATLAB, you cannot use the `pathdef.m` file in the startup directory, but must delete it and create a new version. If you run MATLAB on both Windows and UNIX platforms, you need to maintain a separate `pathdef.m` file for each.

### **Saving the Path in `$matlabroot/toolbox/local`**

If you have write access to `$matlabroot/toolbox/local`, make and save changes to the path using the **Set Path** dialog box, and with `addpath` and `rmpath` functions—choose whichever suits your needs.

There are some disadvantages to this method. You cannot maintain this file when you update to a new version of MATLAB, but will need to use the new default `pathdef.m` and make changes to it. If you run MATLAB on both Windows and UNIX platforms, you need to maintain a separate `pathdef.m` file for each.

## **Recovering from Problems with the Search Path**

If you get unexpected results that are related to the search path, you can try to correct the path file or restore the default path. You might experience path problems if you save the path on a Windows platform and then try to use the same `pathdef.m` file on a UNIX platform. Similarly, you might experience problems if you edit the `pathdef.m` file directly and make it invalid, or if the file becomes corrupt, renamed, or lost.

For example, if an error message similar to the following appears when you start MATLAB

```
Warning: MATLAB did not appear to successfully set the search
path...
```

it indicates a problem with the search path and you will not be able to use MATLAB successfully.

To recover from problems with the search path, try the following, in order, proceeding to the next step only if needed:

- 1** View the `pathdef.m` and `startup.m` files, looking for obvious problems. Make changes and save them. If path problems appear to be resolved, start MATLAB again to be sure the problem does not reappear. Depending on the problem, you might not be able to even view the `pathdef.m` file.
- 2** Use the default path for MathWorks products. In the **Set Path** dialog box, select **Default**, then **Save**, then **Close**. Depending on the problem, you might not be able to even open the dialog box.
- 3** Run `restoredefaultpath`. This sets the search path to include only installed products from the MathWorks. If that seems to have corrected the problem, run `savepath`. Start MATLAB again to be sure the problem does not reappear.

Depending on the problem, this might generate a message such as

The path may be bad. Please save your work (if desired), and quit.

If so, perform step 4.

- 4** Perform these steps after trying step 3.

- a** Run

```
restoredefaultpath; matlabrc
```

This might run for a few minutes. It sets the search path to include only installed products from the MathWorks and corrects path problems encountered during startup.

- b** If there is a `pathdef.m` in your startup directory for MATLAB, it caused the problem. So either remove the bad `pathdef.m` file or replace the with a good `pathdef.m` file, for example, one you can generate at this point with

```
savepath('path_to_your_startup_directory/pathdef.m')
```

- c** Start MATLAB again to be sure the problem does not reappear.

## File Management Operations

MATLAB file operations use the current directory and the MATLAB search path as reference points. Any file you want to run must either be in the current directory or on the search path. The key tools for performing file operations are

- “Current Directory Field” on page 5-30
- “Current Directory Browser” on page 5-30
- “Viewing and Making Changes to Directories” on page 5-32
- “Creating, Renaming, Copying, and Removing Directories and Files” on page 5-33
- “Opening, Running, and Viewing the Content of Files” on page 5-37
- “Finding Files and Content Within Files” on page 5-40
- “Accessing Source Control Features” on page 5-42
- Setting “Preferences for the Current Directory Browser” on page 5-42

---

**Note** You generally cannot perform operations on files and directories for which you do not have proper permission. For example, you cannot copy a file to a read-only directory using the Current Directory browser. You can do so using `movefile`.


---

### Current Directory Field

A quick way to view or change the current directory is by using the current directory field in the desktop toolbar.



To change the current directory from this field, do one of the following:

- In the field, type the path for the new current directory.
- Click the down arrow to view a list of previous working directories, and select an item from the list to make that directory become the MATLAB current working directory. The directories are listed in order, with the most recently used at the top of the list. You can clear the list and set the number of directories saved in the list—see “Preferences for the Current Directory Browser” on page 5-42.
- Click the browse button (...) to set a new current directory.
- Use the up button  to move the current directory up one level.

The current directory field in the desktop also appears in the Current Directory browser, when the Current Directory browser is undocked. Consider it to be one tool with two different means of accessing it.

### Current Directory Browser

To search for, view, open, find, and make changes to MATLAB related directories and files, use the MATLAB Current Directory browser. Most features of the Current Directory browser have equivalent functions that perform similar actions. If you are using the Help browser, watch the Current Directory Browser video demo for an overview of the major functionality.

In addition to the features described here, the Current Directory browser includes tools to help you manage your M-files—see the “Visual Directory in Current Directory Browser” on page 7-2 and “Directory Reports in Current Directory Browser” on page 7-11.

To open the Current Directory browser, select **Desktop -> Current Directory** from the MATLAB desktop, or type `filebrowser` at the Command Window prompt. The Current Directory browser opens.




Change the pathname in the edit box to view a directory and its contents. This field only appears when the Current Directory browser is undocked from the desktop.

Click the find files button to search for M-files and content within M-files.

For Visual Directory and Directory Reports.

Double-click a file to open it in an appropriate tool.

With preferences setting on, view the help portion of the selected M-file.

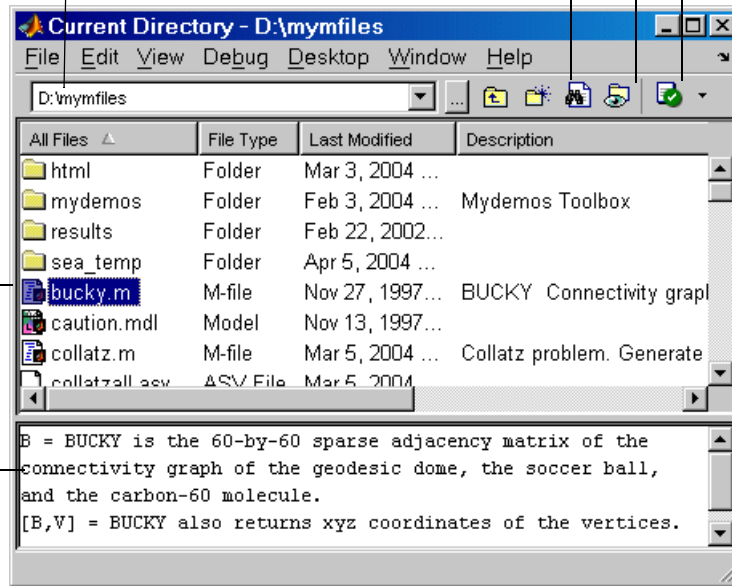

The main tasks you perform with the Current Directory browser are

- “Viewing and Making Changes to Directories” on page 5-32
- “Creating, Renaming, Copying, and Removing Directories and Files” on page 5-33
- “Opening, Running, and Viewing the Content of Files” on page 5-37
- “Finding Files and Content Within Files” on page 5-40
- “Accessing Source Control Features” on page 5-42
- Setting “Preferences for the Current Directory Browser” on page 5-42

### Viewing and Making Changes to Directories

You can change the current directory, view its contents, add directories to the MATLAB search path, and change the way the Current Directory browser presents entries.

#### Changing the Current Working Directory and Viewing Its Contents

To change the current directory, use the current directory field. The Current Directory browser lists the files and directories in the current directory.

To view the contents of a subdirectory, double-click it, or select the subdirectory and press **Enter** or **Return**.

To move up one level in the directory structure, press the **backspace** key.

**Function Alternative.** Use `dir` to view the contents of the current working directory or another specified directory.

Use `what` to see only the MATLAB related files in a directory. With no arguments, `what` displays the MATLAB related files in the current working directory. Use `which` to display the pathname for the specified function. Use `exist` to see if a directory or file exists. Use `fileattrib` to see or set file attributes, much like `attrib` in DOS or `chmod` in UNIX.

#### Adding Directories to the MATLAB Search Path

From the Current Directory browser, you can add directories to the MATLAB search path. Right-click and from the context menu, select **Add to Path**. Then select one of the options:

- **Current Directory**—Adds the current directory to the path.
- **Selected Folders**—Adds the directory selected in the Current Directory browser to the path.
- **Selected Folder and Subfolders**—Adds the directory selected in the Current Directory browser to the path, and adds all of its subdirectories to the path.

## Changing the Display

To specify the types of files shown in the Current Directory browser, use the **View** menu. For example, you can show only M-files. If **All Files** is selected and you want to see specific file types, first clear the selection for **All Files** and then select the specific file types.

You can sort the information shown in the Current Directory browser by column. Click the title of column on which you want to sort. The display is sorted, with the information in the that column shown in ascending order, and an up arrow icon indicates the direction. Click a second time on the column title to sort the information in descending order.

## Creating, Renaming, Copying, and Removing Directories and Files

### General Notes

If you have write permission, you can create, copy, remove, and rename MATLAB related files and directories for the directory shown in the Current Directory browser. If you do not have write permission, you can still copy files and directories to another directory, or you can use equivalent functions, such as `movefile`.

To run functions whose arguments require the use of a pathname or filename, use the function form rather than the unquoted or command form of the syntax when the pathname or filename includes spaces. For example, the command form

```
delete my file.m
```


generates a warning and does not delete `myfile.m`. Instead use the function form of the syntax.

```
delete('my file.m')
```

### Creating New Files

To create a new file in the current directory:

- 1 Select **New** from the context menu or **File** menu and then select the type of file to create.

An icon for that file type, for example, an M-file icon , with the default name Untitledn appears at the end of the list of files shown in the Current Directory browser.

- 2 Type over Untitledn with the name you want to give to the new file.
- 3 Press **Enter** or **Return**.


The file is added.

- 4 To enter the contents of the new M-file, open the file—see “Opening, Running, and Viewing the Content of Files” on page 5-37. If you created the file using the context menu, the new file opens in the Editor with a template for writing an M-file function.

**Function Alternative.** Use the edit function to create a new M-file or other type of text file in the Editor/Debugger.

### Creating New Directories

To create a new directory in the current directory:

- 1 Click the new folder button  in the Current Directory browser toolbar, or select **New -> Folder** from context menu.

An icon, with the default name NewFoldern appears at the end of the list of files shown in the Current Directory browser.

- 2 Type over NewFoldern with the name you want to give to the new directory.
- 3 Press the **Enter** or **Return** key.

The directory is added.

**Function Alternative.** To create a directory, use the `mkdir` function. For example,

```
mkdir newdir
```

creates the directory `newdir` within the current directory.

## Renaming Files and Directories

To rename a file or directory, select the item, right-click, and select **Rename** from the context menu. Type over the existing name with the new name for the file or directory, and press **Enter** or **Return**. The file or directory is renamed.

**Function Alternative.** You can use `movefile` to rename a file or directory. For example,

```
movefile('myfile.m', 'projectresults.m')
```

renames `myfile.m` to `projectresults.m`.

## Cutting or Deleting Files and Directories

To cut or delete files and directories:

- 1 Select the files and directories to remove. Use **Shift+click** or **Ctrl+click** to select multiple items.
- 2 Right-click and select **Cut** or **Delete** from the context menu.

The files and directories are removed.

Files and directories you delete from the Current Directory browser go to the Recycle Bin on Windows (or the Trash Can on Macintosh platforms). If you do not want the selected items to go to the Recycle Bin, press **Shift+Delete**. A confirmation dialog box displays before the items are deleted if you have set that option in your operating system. For example, on Windows, right-click the Recycle Bin, select **Properties** from the context menu, and then, under the **Global** tab, select the check box to **Display delete confirmation dialog**.

**Function Alternative.** To delete a file, use the `delete` function. For example,

```
delete('d:/mymfiles/testfun.m')
```

deletes the file `testfun.m`. You can recover deleted files if you use the preference described in “Default Behavior of the Delete Function” on page 2-55 or the recycle function.

To delete a directory and optionally its contents, use `rmdir`. For example,

```
rmdir('myfiles')
```

removes the directory `myfiles` from the current directory.

### Copying and Pasting Files and Directories

Using the Current Directory browser, you can copy (or cut) and paste files and directories:

- 1 Select the files or directories to copy. Use **Shift**+click or **Ctrl**+click to select multiple items. For a directory, the entire contents are copied, including all subdirectories and files.
- 2 Right-click and select **Copy** from the context menu.
- 3 Navigate to the file or directory where you want to paste the items you just copied.
- 4 Right-click and select **Paste** from the context menu.

You can also copy and paste files and directories to and from tools outside of MATLAB, such as Windows Explorer. You can use Current Directory browser menu items and the keyboard shortcuts, or you can drag the items.

**Function Alternative.** Use `movefile` or `copyfile` to cut and paste or to copy and paste files or directories. For example, to make a copy of the file `myfun.m` in the current directory, assigning it the name `myfun2.m`, type

```
copyfile('myfun.m', 'myfun2.m')
```

## Opening, Running, and Viewing the Content of Files

### Opening Files

You can open a file using the open features of the Current Directory browser. The file opens in the tool associated with that file type.

Select one or more files and perform one of the following actions:

- Press the **Enter** or **Return** key.
- Right-click and select **Open** from the context menu.
- Double-click the file(s).

The file opens in the appropriate tool. For example, the Editor/Debugger opens for M-files, and Simulink opens for model (.mdl) files.

To open a file in the Editor/Debugger, no matter what type it is, select **Open as Text** from the context menu. One exception is P-files (.p), which you cannot open.

To open a file using an external application, select **Open Outside MATLAB** from the context menu. For example, if you select `myfile.doc`, **Open Outside MATLAB** opens `myfile.doc` in Microsoft Word, assuming you have the .doc file association configured to start Word.

You can also import data from a file. Select the file, right-click, and select **Import Data** from the context menu. The Import Wizard opens. See the Import Wizard documentation for instructions to import the data.

**Function Alternative.** Use the `open` function to open a file in the tool appropriate for the file, given its file extension. Default behavior is provided for standard MATLAB file types. You can extend the interface to include other file types and to override the default behavior for the standard files. For name .ext, `open` performs the following actions.

File Type	Extension	Action
Figure file	fig	Opens figure name .fig in a figure window.
HTML file	html	Opens HTML file name .html in the MATLAB Web browser.
M-file	m	Opens M-file name .m in the Editor.
MAT-file	mat	Opens MAT-file name .mat in the Import Wizard.
Model	mdl	Opens model name .mdl in Simulink.
P-file	p	Cannot open P-files.
PDF file	pdf	Opens the PDF file name .pdf in the installed PDF reader, for example, Adobe Acrobat.
Variable	none	Opens the numeric or string array name in the Array Editor; <code>open</code> calls <code>openvar</code> .
Other	custom	Opens name .custom by calling the helper function <code>opencustom</code> , where <code>opencustom</code> is a user-defined function.

Use `winopen` to open a file using an external application on Windows platforms.

To view the content of an ASCII file, such as an M-file, use the `type` function. For example

```
type('startup')
```

displays the contents of the file `startup.m` in the Command Window.



### **Running M-Files**

To run an M-file from the Current Directory browser, select it, right-click, and select **Run** from the context menu. The results appear in the Command Window.

To get the name of the currently running M-file, use `mfilenam`.

### **Viewing Help for an M-File**

You can view help for the M-file selected in the Current Directory browser. From the context menu, select **View Help**. The reference page for that function appears in the Help browser, or if a reference page does not exist, the M-file help appears.

You can view the M-file help in the Current Directory browser—for instructions, see “Preferences for the Current Directory Browser” on page 5-42.

## Finding Files and Content Within Files

Use the Find Files tool to search for files or for specified text within files.


Results of find. Click a column heading to change sort order. Close current tab panel.

The screenshot shows the 'Find Files' dialog box. On the left, there are input fields for 'Find files named:', 'Find files containing text:', and 'Look in:'. Below these are checkboxes for 'Include subdirectories', 'Match case', and 'Show full pathnames', along with a 'Restore Defaults' button. The right side features a table with columns 'Filename', 'Line', and a preview of the found text. Below the table is a summary of matches and a list of directories searched.

Filename	Line	Preview
codepad_example.m	12	plot(x,y)
codepad_example2.m	10	plot(x,y)
codepad_example2.m	51	plot(humps)
collatzall.m	2	% Plot length of sequence
collatzall.m	8	% Determine and plot sequ
collatzplot.m	2	% Plot length of sequence
collatzplot.m	8	% Determine and plot sequ
fern.m	8	p = plot(x(1),x(2),'.');

Annotations include: 'Type text or filename (or both) to find.' pointing to the search name field; 'Select directories to search in.' pointing to the 'Look in:' dropdown; 'Find specified items.' pointing to the 'Find' button; 'Use advanced options.' pointing to the 'Advanced Options <<' button; 'Set options to default values.' pointing to the 'Restore Defaults' button; 'View results of previous searches in their own tab panels.' pointing to the table; and 'Close Find Files tool.' pointing to the 'Close' button.

To search for files in one or more directories, or to search for specified text in files, follow these instructions:

- 1 Open the Find Files tool by clicking the find files button  in the Current Directory browser toolbar, or selecting **Edit -> Find Files** from the desktop **Edit** menu.

The **Find Files** dialog box opens.

**2** Type in the filename or text you are searching for:

- To search for files, type the filename in the **Find files named** field. You can use the wildcard character (\*) in the filename. For example, type `coll*` to search for filenames that start with `coll`.
- To search for text, type the text in the **Find files containing text** field. For example, search for the `plot`. Do not use a wildcard character, but instead use the **Advanced Options Search type** (see step 4).
- To search for text in specified filenames only, type entries in both fields.

Use the dropdown list to view and select previous entries from the current MATLAB session.

**3** From the **Look in** list box, select the directories to search in. You can instead type the full pathname for one or more directories into this field (with each pathname separated by a semicolon ;), or select the Browse option at the end of the list box. To include subdirectories in the search, select the **Include subdirectories** check box.

For example, search the MATLAB current directory.

**4** To specify additional search criteria, click **Advanced Options**.

For example, select `*.m` in the **In file type** field to limit the search to M-files only. The default, `*`, searches all file types.

By default, a text search looks for partial matches (the `Contains text` option for **Search type**). You can instead select `Matches whole word`.

**5** To execute the search, click **Find**. While the search is in progress, the **Find** button label changes to **Stop Find**. To abort a search, click **Stop Find**.

Search results appear in the panel on the right side of **Find Files** dialog box, with a summary of the results at the bottom of the panel. For text searches, the line number and line of code are shown. To see the full pathnames for the files, select the **Show full pathnames** check box under **Advanced Options**.

- 6 Click a column heading to sort the results based on that column. Click the column heading again to reverse the sort order for that column. For example, click **Line** to sort results by line number.

You can open any M-files that appear in the results list by doing one of the following:

- Double-click the file
- Select the files and press **Enter** or **Return**
- Right-click and select **Open** from the context menu

The M-files open in the Editor/Debugger. For text searches, the file opens scrolled to the line number shown in the results section of the **Find Files** dialog box. Once in the Editor/Debugger, you can use the **Find & Replace** tool to replace specified text.

To see the results of a previous search, select its tab at the bottom of the results panel.

**Function Alternative.** Use `lookfor` to search for the specified text in the first line of help for all M-files on the search path.


## Accessing Source Control Features

Select a file or files in the Current Directory browser and right-click to view the context menu. From there you can access features for Source Control. For details on these features, see Chapter 9, “Source Control”.

## Preferences for the Current Directory Browser

Using preferences, you can specify the number of recently used current directories to maintain in the history list as well as the type of information to display in the Current Directory browser.

From the Current Directory browser **File** menu, select **Preferences**. The **Current Directory Preferences** pane appears in the **Preferences** dialog box.

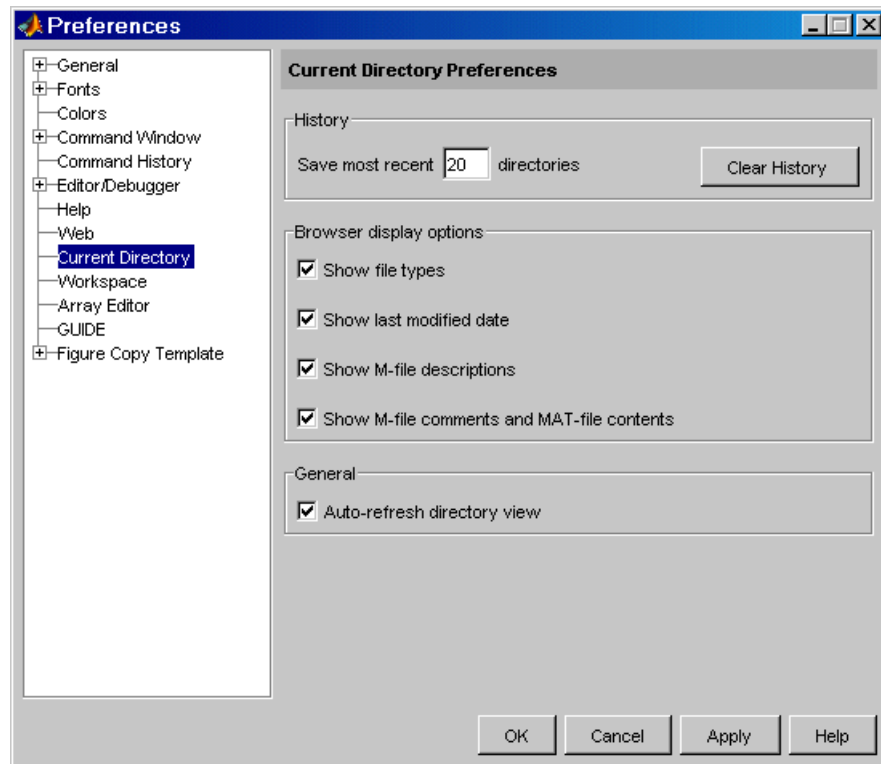

## History

The dropdown list in the current directory field shows the history of current directories, that is, the most recently used current directories.

**Saving Directories.** When the MATLAB session ends, the list of directories will be maintained. Use the **Save most recent directories** field to specify how many directories will appear on the list at the start of the next MATLAB session.

**Removing Directories.** To remove all entries in the list, click **Clear History**. The list is cleared immediately.

### Browser Display Options

In the Current Directory browser, you can view the file type, last modified date, M-file descriptions, and M-file comments and MAT-file contents by selecting the appropriate **Browser display options**.

### General

By default, the **Auto-refresh directory view** check box is selected. Changes you make to file and directory names in the current directory using other applications are immediately reflected in the Current Directory browser.

If you do not want the Current Directory browser to immediately reflect the changes, clear this preference. You can then right-click and select **Refresh** from the context menu to update the display.

# Editing and Debugging M-Files

---

MATLAB provides powerful tools for creating, editing, and debugging files, as detailed here. For information about the MATLAB language and writing M-files, see the MATLAB Programming documentation.

Begin with Existing Code (p. 6-2)

Before you begin writing MATLAB programs, consider starting with existing code, and then modify that code using the Editor/Debugger. Code resources include your own Command Window and History, and existing M-files, demos, and examples.

Ways to Edit and Debug Files (p. 6-4)

You can use the MATLAB Editor and Debugger with MATLAB, use the Editor without MATLAB, use another editor you already have, and use debugging functions in the Command Window. In the Editor/Debugger, you can edit M-files as well as other file types.

Starting, Customizing, and Closing the Editor/Debugger (p. 6-6)

Create new files, open existing files, open files without starting MATLAB, arrange document windows, and set preferences.

Creating, Editing, and Running Files (p. 6-13)

Control the appearance of files during editing, navigate in files, run M-files, and save, print, and close files.

Debugging M-Files (p. 6-33)

Find errors and debugging features.

Rapid Code Iteration Using Cells (p. 6-63)

Readily experiment with changes to your M-files by modifying and running sections of the files, called cells, and by incrementally modifying values.

### Begin with Existing Code

Before you begin writing MATLAB code in a blank file, consider starting by using existing resources for the code, and then use the Editor/Debugger to modify the code. This section presents some resources to draw upon.

#### Create M-Files from Command Window and History

In many cases, you create and run MATLAB statements in the Command Window, modify those statements to your satisfaction, and then create an M-file that includes the statements. To facilitate this process, in the Command History, select the MATLAB statements you want to include in the M-file. Right-click and select **Create M-File**. The Editor/Debugger opens a new file that includes the statements you selected from the Command History. You can also copy the statements from the Command History and paste them into an existing M-file.

#### Use Existing M-Files and Examples

If you can find existing code that accomplishes what you want to do, copy it and use it in your own M-file, assuming you have legal permission to do so. Here are some resources.


##### MATLAB and Toolbox M-Files

You can access and reuse the code in MATLAB and toolbox functions that have a `.m` file extension. You cannot use MATLAB and toolbox functions that have a `.bi` file extension (for built-in), meaning they are efficient but their code is not accessible. If there is a MATLAB function that is similar to what you need to do and it is not built-in, open the file in the Editor/Debugger and use it as a basis for your file. Be sure to save the file using a different name and in a directory that is not in `$matlabroot/toolbox`. See “Saving M-Files” on page 6-29 for details.

##### Demos and Examples

MATLAB and its toolboxes include demonstration programs. You can view the code in the demos and copy it for use in your own M-files. To see the demos, type `demo`, which opens the Help browser to the **Demos** panel. For more information about demos, see “Demos in the Help Browser” on page 4-23.



There are also code examples in the online documentation. To see a list of examples for a product, type `helpbrowser` to open the Help browser. In the **Contents** panel, click **+** for the product to view the help topics, and then select the  **Examples** entry.

### **File Exchange**

The MathWorks Web site features a user contributed code library, from which you can download free M-files contributed by users and developers of MATLAB, Simulink, and related products. To view the files available to download, go to the MATLAB Central File Exchange page on The MathWorks Web site,

<http://www.mathworks.com/matlabcentral/fileexchange/index.jsp>. You can access this via the **Help -> Web** menu in any desktop component.

## Ways to Edit and Debug Files

There are several methods for creating, editing, and debugging files with MATLAB as described in this table.

Task	Option	Instructions
Creating and editing M-files	M-files in MATLAB Editor/Debugger	“Starting, Customizing, and Closing the Editor/Debugger” on page 6-6, and “Creating, Editing, and Running Files” on page 6-13
	M-files in MATLAB Editor in stand-alone mode (without running MATLAB)	“Opening the Editor Without Starting MATLAB” on page 6-10
	M-files in any text editor, such as Emacs or vi	To specify another editor as the default for use with MATLAB, select <b>File -&gt; Preferences -&gt; Editor/Debugger</b> , and for <b>Editor</b> , specify the <b>Text editor</b> . Click <b>Help</b> in the <b>Preference</b> panel for details. You can still debug the M-files using the MATLAB Editor/Debugger or debugging functions.
Creating and editing other file types	Other file types in the MATLAB Editor	Create, open, edit, and save other file types in the MATLAB Editor. See “Working with Other Text File Types” on page 6-12.
Debugging M-files	General debugging tips	“Finding Errors in M-Files” on page 6-33
	MATLAB Debugger	“Debugging Process and Features” on page 6-39
	MATLAB debugging functions (for use in the Command Window)	“Debugging Process and Features” on page 6-39

Use preferences for the Editor/Debugger to set up the editing and debugging environment to best meet your needs. For information about the MATLAB language and writing M-files, see the MATLAB Programming documentation.

## Starting, Customizing, and Closing the Editor/Debugger

The MATLAB Editor/Debugger provides a graphical user interface for basic text editing features for any file type, as well as for M-file debugging. The Editor/Debugger is a single tool that you can use for editing, debugging, or both.


There are various ways to start the Editor/Debugger. The Editor/Debugger automatically starts when you open a document or create a new one, as detailed in these sections:

- “Creating a New File in the Editor/Debugger” on page 6-7
- “Opening Existing Files in the Editor/Debugger” on page 6-8
- “Opening the Editor Without Starting MATLAB” on page 6-10 (no Debugger)


After starting the Editor/Debugger, follow the instructions for

- “Arranging Editor/Debugger Documents” on page 6-10
- “Preferences for the Editor/Debugger” on page 6-11
- “Working with Other Text File Types” on page 6-12
- “Closing the Editor/Debugger” on page 6-12


This figure shows an example of the Editor/Debugger outside of the desktop opened to an existing M-file, and calls out some of the tool’s useful features.

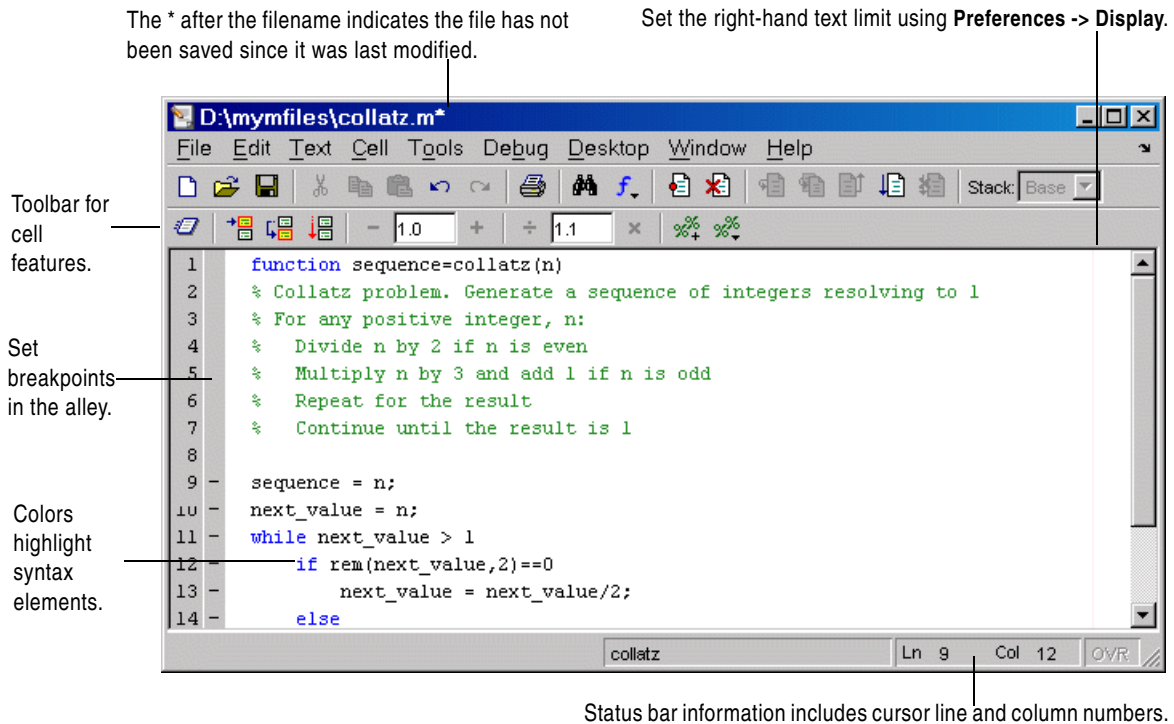

## Creating a New File in the Editor/Debugger

To create a new text file in the Editor/Debugger, either click the new file button  on the MATLAB desktop toolbar, or select **File -> New -> M-File** from the MATLAB desktop. The Editor/Debugger opens, if it is not already open, with an untitled file in the MATLAB current directory, in which you can create an M-file or another type of text file.

The location of the new file and the Editor/Debugger are determined by document positioning guidelines. You can rearrange the documents to suit your needs. For details, see “Opening and Arranging Documents” on page 2-7.

If the Editor/Debugger is open, create more new files by using the new file button  on the toolbar, or select **File -> New -> M-File**.

Other tools also provide features for creating new M-files. For example, in the Command History, select statements, right-click, and select **Create M-File** from the context menu. Similarly, create a new file from the context menu in the Current Directory browser—see “Creating New Files” on page 5-34.

### Function Alternative for Creating a New M-File


Type `edit` in the Command Window to create a new file in the Editor/Debugger.

Type `edit filename.ext` to create the file `filename.ext`. If `filename.ext` already exists in the current directory or on the MATLAB search path, this opens the existing file. If `filename.ext` does not exist in the current directory or on the MATLAB search path, a prompt appears asking if you want to create a new file titled `filename.ext`:

- If you click **Yes**, the Editor/Debugger creates a blank file titled `filename.ext`. If you do not want the dialog to appear in this situation, select that check box in the dialog. Then, the next time you type `edit filename.ext`, the file is created without first prompting you.
- If you click **No**, the Editor/Debugger does not create a new file. If you do not want the dialog to appear in this situation, select that check box in the dialog. In that case, the next time you type `edit filename.ext`, a “file not found” message appears.

If you want the dialog to appear, specify that using the preference **Show dialog prompt...** For details, see the online documentation for preferences, “Opening Files in Editor”.

### Opening Existing Files in the Editor/Debugger

To open an existing file in the Editor/Debugger, click the open button  on the desktop or Editor/Debugger toolbar, or select **File -> Open**.

The **Open** dialog box appears, listing all M-files. You can see different files by changing the selection for **Files of type** in the dialog box. Type or select a filename, and click **Open**. If you access the **Open** dialog box from the desktop, the current directory files are shown, but if you access it from the Editor/Debugger, the files in the directory for the current file are shown.

The Editor/Debugger opens, if it is not already open, with the file displayed. The location of the file and the Editor/Debugger are determined by document positioning guidelines. You can rearrange the documents to suit your needs. For details, see “Opening and Arranging Documents” on page 2-7.

To make a document in the Editor/Debugger become the current document, click it, or select it from the **Window** menu or document bar.

### Other Methods for Opening Files in the Editor/Debugger

These are other ways to open files in the Editor/Debugger:

- Drag a file from another MATLAB desktop tool or a Windows tool into the Editor/Debugger. For example, drag files from the Current Directory browser, or from Windows Explorer.
- Open files from the Current Directory browser—see “Opening Files” on page 5-37.
- Select a file to open from the most recently used files, which are listed at the bottom of the **File** menu in the Editor/Debugger and all other desktop tools. You can change the number of files appearing on the list—select **File -> Preferences -> Editor/Debugger** and in the **Most recently used file list**, specify the **Number of entries**.
- In the Editor/Debugger or another desktop tool such as the Command Window, select a filename, right-click, and select **Open Selection** from the context menu to open that file. See “Opening a Selection in an M-File” on page 6-28 for details.
- Set a preference that instructs MATLAB, upon startup, to automatically open the files that were open when the previous MATLAB session ended. Select **File -> Preferences -> Editor/Debugger** and in the **Opening files in editor area**, select the check box for **On restart reopen files from previous MATLAB session**.

**Function Alternative for Opening an M-File.** Use the `edit` or `open` function to open an existing file in the Editor/Debugger. For example, type

```
edit collatz.m
```

to open the file `collatz.m` in the Editor/Debugger, where `collatz.m` is on the search path or in the current directory. Use the relative or absolute pathname for the file you want to open if it is not on the search path or in the current directory.

### Opening the Editor Without Starting MATLAB

On Windows platforms, you can use the MATLAB Editor without starting MATLAB. For example, double-click an M-file in Windows Explorer and the M-file opens in the MATLAB Editor without starting MATLAB. To open the Editor to a new file, run `$matlabroot/bin/win32/meditor.exe`. Regardless of the type of MATLAB license you have, you can open multiple instances of `meditor` because it is not considered an instance of MATLAB.

When you open the MATLAB Editor without starting MATLAB, the Editor is a stand-alone (or `standalone`) application. You cannot debug M-files from it, evaluate a selection, access source control features, dock the Editor in the MATLAB desktop, nor access help from it. It remains a stand-alone application, even if you subsequently open MATLAB. Other than these limitations, you can use the editing features as described in “Creating, Editing, and Running Files” on page 6-13.

For Windows platforms, when MATLAB is installed, the stand-alone Editor is automatically associated with files having a `.m` extension. If you double-click an M-file, the stand-alone Editor opens. You can change the association using Windows Explorer so that files with a `.m` extension open in the Editor/Debugger in MATLAB.

### Arranging Editor/Debugger Documents

You can arrange the size and location of M-files and other text documents you open in the Editor/Debugger. Editor/Debugger documents follow the same arrangement practices as other desktop documents. For details, see “Opening and Arranging Documents” on page 2-7.




## Preferences for the Editor/Debugger

Using preferences, you can specify the default behavior for various aspects of the Editor/Debugger.

To set preferences for the Editor/Debugger, select **Preferences** from the **File** menu in the Editor/Debugger. The **Preferences** dialog box opens showing **Editor/Debugger Preferences**.

Appears only if EmacsLink is registered with MATLAB.

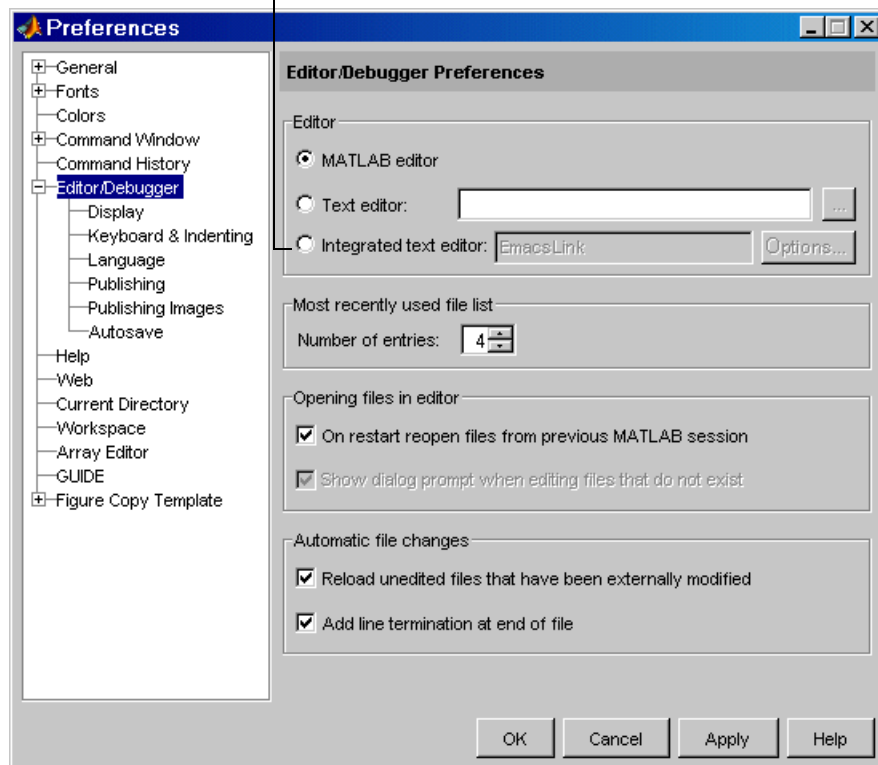

Click the + next to Editor/Debugger in the left pane to view all categories of Editor/Debugger preferences. Select a category and that preference panel displays. Make changes and click **Apply** or **OK**.

For details about specific Editor/Debugger preferences, see “Preferences for the Editor/Debugger” in the online documentation, or click **Help** in the **Preferences** dialog box.


### Working with Other Text File Types

You can edit any type of text file using the MATLAB Editor. For example, you can open and edit an HTML file. Note that you can run or debug only M-Files from the Editor/Debugger.

When working with files created for C/C++, Java, and HTML, you can specify syntax highlighting and indenting preferences appropriate to those languages. Select **File -> Preferences -> Editor/Debugger -> Language**. See details in the online documentation for language preferences or click the **Help** button in the dialog box.

### Closing the Editor/Debugger

To close the Editor/Debugger, click the close box in the title bar of the Editor/Debugger. This is different from the close box in the menu bar of the Editor/Debugger, which closes the current file when multiple files are open in a single window.

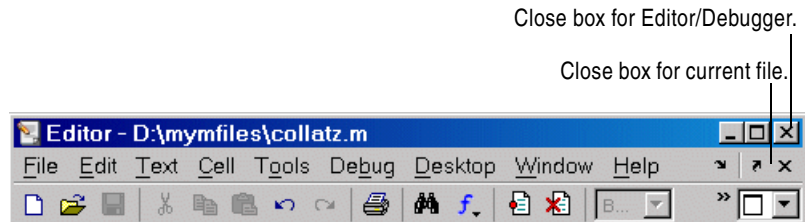

If multiple files are open, with each in a separate window, close each window separately. To close all files at once, select **Close All Documents** from the **Window** menu. Note that this will close other desktop documents as well, such as arrays in the Array Editor, and it will close the tools as well, that is, the Editor/Debugger and Array Editor, for example.

When you close the Editor/Debugger and any of the open files have unsaved changes, you are prompted to save the files.

## Creating, Editing, and Running Files

In the Editor/Debugger, use these editing features to create, modify, and run your files:

- “Entering Statements” on page 6-13, including adding comments
- “Appearance of an M-File” on page 6-19, including syntax highlighting
- “Navigating in an M-File” on page 6-21, including go to, and find and replace
- “Opening a Selection in an M-File” on page 6-28
- “Saving M-Files” on page 6-29
- “Running M-Files from the Editor/Debugger” on page 6-31
- “Printing M-Files” on page 6-32
- “Closing M-Files” on page 6-32

### Entering Statements

After opening an existing file or creating a new file, enter statements in the Editor/Debugger. Follow the same rules you would use for entering statements in the Command Window as described in these sections:

- “Case and Space Sensitivity” on page 3-8
- “Entering Multiple Functions in a Line” on page 3-11
- “Entering Long Statements” on page 3-11
- “Suppressing Output” on page 3-18
- “Formatting and Spacing Numeric Output” on page 3-19

In addition, utilize these Editor/Debugger features.

- “Adding Comments” on page 6-14
- “Changing the Case of Selected Text” on page 6-18
- “Undo and Redo” on page 6-19
- “Finding and Replacing Text in the Current File” on page 6-24

### Adding Comments

Comments are strings or statements in an M-file that do not execute. Add comments in an M-file to describe the code or how to use it. Comments determine what text displays when you run `help` for a filename. Use comments when testing your files or looking for errors—temporarily turn lines of code into comments to see how the M-file runs without those lines.

- “Commenting Using the MATLAB Editor” on page 6-14
- “Commenting Using Any Text Editor” on page 6-15
- “Commenting Out Part of a Statement” on page 6-17
- “Formatting Comments” on page 6-18

**Commenting Using the MATLAB Editor.** You can comment the current line or a selection of lines:

- 1** For a single line, position the cursor in that line. For multiple lines, click in the line and then drag or **Shift**+click to select multiple lines.
- 2** Select **Comment** from the **Text** menu, or right-click and select it from the context menu.

A comment symbol, `%`, is added at the start of each selected line, and the color of the text becomes green or the color specified for comments—see “Syntax Highlighting” on page 6-19.

To uncomment the current line or a selected group of lines, select **Uncomment** from the **Text** menu, or right-click and select it from the context menu.

Click in the area to the left of a line to select that line.  
To select multiple lines, drag or **Shift**+click, as shown here.

Select **Text** -> **Comment** to make all the selected lines comments.

```

1 function sequence=collatz(n)
2 - Collatz problem. Generate a sequence of integers resolving to 1
3 - For any positive integer, n:
4 -     Divide n by 2 if n is even
5 -     Multiply n by 3 and add 1 if n is odd
6 -     Repeat for the result
7 -     Continue until the result is 1
8
9 - sequence = n;
10 - next_value = n;
11 - while next_value > 1

```

**Commenting Using Any Text Editor.** You can make any line a comment by typing % at the beginning of the line. To put a comment within a line, type % followed by the comment text; MATLAB treats all the information after the % on that line as a comment.

```

% This is a comment. ———MATLAB ignores this comment line when you run the M-file.
This is not a comment. ——— This line produces an error when you run the M-file.

```

To uncomment any line, delete the comment symbol, %.

To comment a contiguous group of lines, type %{ before the first line and %} after the last line you want to comment. This is referred to as a block comment. The lines that contain %{ and %} cannot contain any other text. After typing the opening block comment symbol, %{, all subsequent lines assume the syntax highlighting color for comments until you type the closing block comment symbol, %}. At that point, only the lines between the block comment symbols

have the syntax highlighting color for comments. Remove the block comment symbols, `%{` and `%}`, to uncomment the lines.

This examples shows some lines of code commented out. When you run the M-file, the commented lines will not execute. This is useful when you want to identify the section of a file that is not working as expected.

Comment a block of code by adding `%{` before the first line and `%}` after the last line.

```
    a = magic(3)
    %{
    sum(a)
    diag(A)
    sum(diag(a))
    %}
    sum(diag(fliplr(a)))
```

You can easily extend a block comment without losing the original block comment, that is, create a nested block comment, as shown in the following example.

Create a nested comment, that is, a block comment within a block comment.

```
Extended comment ———— %{
                       a = magic(3)
Original comment ———— %{
                       sum(a)
                       diag(A)
                       sum(diag(A))
                       %}
                       sum(diag(fliplr(a)))
                       %}
```

**Commenting Out Part of a Statement.** To comment out the end of a statement, put the comment character, %, before the comment. When you run the file, MATLAB ignores any text on the line after the %.

Any text following a % within a line is considered to be a comment.

```
a = zeros(10) % Initialize matrix
```

To comment out text within a multiline statement, use the ellipsis (...). MATLAB ignores any text appearing after the ... on a line and continues processing on the next line. This effectively makes a comment out of anything on the current line that follows the ...

```
header = ['Last Name, ' ...
'First Name, ' ...
... 'Middle Initial,
'Title']
```

MATLAB ignores the text following the ... on the line

```
... 'Middle Initial, '
```

Note that Middle Initial is green, which is the syntax highlighting color for a comment.

MATLAB continues processing the statement with the next line

```
'Title']
```

MATLAB effectively runs

```
headers = ['Last Name, ' ...
'First Name, ' ...
'Title']
```

**Formatting Comments.** To make comment lines in M-files wrap when they reach a certain column:

- 1** Specify the maximum column number using preferences for the Editor/Debugger. Select **Language -> M**. For **Comment formatting**, set the **Max width**.
- 2** Select contiguous comment lines that you want to limit to the specified maximum width.
- 3** Select **Text -> Wrap Selected Comments**.

The selected comment lines are reformatted so that no comment line in the selected area is longer than the maximum. Lines that were shorter than the specified maximum are merged to make longer lines if they are at the same level of indentation.

To automatically limit comment lines to the maximum width while you type, select the **Comment formatting** preference to **Autowrap comments**.

For example, assume you select **Autowrap comments** and set the maximum width to be 75 characters, which is the width that will fit on a printed page using the default font for the Editor/Debugger. When typing a comment line, as you reach the 75th column, the comment automatically continues on the next line.

### Changing the Case of Selected Text

To change the case of text in the Editor, select the text and then use one of these key sequences:

- Press **Alt+U, U** to change all text to upper case
- Press **Alt+U, L** to change all text to lower case
- Press **Alt+U, R** to change the case of each letter

This is useful, for example, when copying syntax from help in an M-file, where uppercase is used but will not run in MATLAB. In this example, the text was copied and pasted from help get.

```
V = GET(H, 'Default')
```



Select the line of text. Press **Alt+U** and then press **L**. The line becomes

```
v = get(h, 'default')
```

Pressing **Alt+U** and then **R** changes the original help line to

```
v = get(h, 'DEFAULT')
```

## Undo and Redo

You can undo many of the Editor/Debugger actions listed in **Edit** and **Text** menus. Select **Edit -> Undo**. You can undo multiple times in succession until there are no remaining actions to undo. Select **Edit -> Redo** to reverse an undo.

## Appearance of an M-File

The following features make M-files more readable:

- “Syntax Highlighting” on page 6-19
- “Indenting” on page 6-19
- “Nested Functions Indenting” on page 6-20
- “Line and Column Numbers” on page 6-20
- “Right-Hand Text Limit” on page 6-20
- “View Function or Subfunction” on page 6-20

You can specify the default behaviors for some of these—see “Fonts, Colors, and Other Preferences” on page 2-44.

## Syntax Highlighting

Some entries appear in different colors to help you better find matching elements, such as `if/else` statements. This is called syntax highlighting and is used in the Command Window and History, as well as in the Editor/Debugger. For more information, see the Command Window documentation for “Syntax Highlighting” on page 3-9.

## Indenting

Program control entries are automatically indented to aid in reading loops, such as `while/end` statements.

To move the current or selected lines further to the left, select **Decrease Indent** from the **Text** menu. To move the current or selected lines further to

the right, select **Increase Indent** from the **Text** menu. If after using these features you want to apply automatic indenting to selected lines, select **Smart Indent** from the **Text** menu, or right-click and select it from the context menu.

Select a line or group of lines and press the **Tab** key to indent the lines. Press **Shift+Tab** to decrease the indent for the selected lines. This works differently if you select the preference for **Emacs style Tab key smart indenting**—when you position the cursor in any line or select a group of lines and press **Tab**, the lines indent according to smart indenting practices.

For more information about smart indenting and indenting preferences, see the Editor Keyboard and Indenting Preferences for the Editor/Debugger and Language Preferences for the Editor/Debugger in the online documentation.

### Nested Functions Indenting

If you select the language preference for smart indenting, you can select from three indenting options when you enter a nested function (a function within a function) in the Editor. For details, see “Function Indenting Format” in the online documentation for Editor preferences.

### Line and Column Numbers

Line numbers are displayed along the left side of the Editor/Debugger window. You can elect not to show the line numbers using preferences—see Display Preferences for the Editor/Debugger.

The line and column numbers for the current cursor position are shown in the far right side of the status bar in the Editor/Debugger.

### Right-Hand Text Limit

By default, a faint vertical line appears at column 75 in the Editor/Debugger, providing a cue as to when a line becomes wider than desired, which is useful to know for printing, for example. You can hide the line or change the column number at which it appears—see Display Preferences for the Editor/Debugger.

### View Function or Subfunction

View the function or subfunction the cursor is currently at in the right side of the status bar in the Editor/Debugger. See also `dbstack`.

## Navigating in an M-File

There are several options for navigating in M-files:

- “Arrow and Control Keys (Shortcuts) in the Editor” on page 6-21
- “Going to a Line Number” on page 6-22
- “Going to a Bookmark” on page 6-22
- “Going to a Function (Subfunctions and Nested Functions)” on page 6-23

See also “Finding Text in Files” on page 6-23.

### Arrow and Control Keys (Shortcuts) in the Editor

Following is the list of arrow and control keys that serve as shortcuts for using the Editor. This list does not include shortcut keys for menu items—you can view those on the menus. If you select the Editor’s **Emacs** Key Bindings for the Editor/Debugger preference, you can also use the **Ctrl**+key combinations shown. See also general “Keyboard Shortcuts” on page 2-35.

Key	Additional Control Key for Emacs Preference	Operation
↑	<b>Ctrl+P</b>	Move to <i>previous</i> line.
↓	<b>Ctrl+N</b>	Move to <i>next</i> line.
<b>Ctrl+</b> ↑	none	Scroll screen down one line
<b>Ctrl+</b> ↓	none	Scroll screen up one line
<b>Ctrl+Home</b>	none	Move to top of file.
<b>Ctrl+End</b>	none	Move to end of file.
←	<b>Ctrl+B</b>	Move <i>back</i> one character.
→	<b>Ctrl+F</b>	Move <i>forward</i> one character.
<b>Ctrl+</b> →	none	Move <i>right</i> one word.
<b>Ctrl+</b> ←	none	Move <i>left</i> one word.
<b>Home</b>	<b>Ctrl+A</b>	Move to beginning of line.

Key	Additional Control Key for Emacs Preference	Operation (Continued)
<b>End</b>	<b>Ctrl+E</b>	Move to end of line.
<b>Delete</b>	<b>Ctrl+D</b>	Delete character after cursor.
<b>Backspace</b>	none	Delete character before cursor.
none	<b>Ctrl+K</b>	Cut contents ( <i>kill</i> ) to end of line.
<b>Shift+Home</b>	none	Select to beginning of line.
<b>Shift+End</b>	none	Select to end of line.
<b>Insert</b>	none	Change to overwrite mode from insert mode, or change to insert mode from overwrite mode. Overwrite mode replaces existing text as you type. In overwrite mode, the cursor changes to a wide block.

### Going to a Line Number

Select **Edit -> Go to Line**. In the resulting dialog box, enter the **Line number** and click **OK**. The cursor moves to that line number in the current M-file.

### Going to a Bookmark

You can set a bookmark at a line in a file in the Editor/Debugger so you can quickly go to the bookmarked line. This is particularly useful in long files. For example, while working on a line, if you need to look at another part of the file and then return, set a bookmark at the current line, go to the other part of the file, and then go back to the bookmark.

To set a bookmark, position the cursor anywhere in the line and select **Edit ->Set Bookmark**. A bookmark icon appears to the left of the line.


```
11|- [ ] while next_value > 1
```

To go to a bookmark, select **Next Bookmark** or **Previous Bookmark** from the **Edit** menu.

To clear a bookmark, position the cursor anywhere in the line and select **Edit -> Clear Bookmark**.

Bookmarks are not maintained after you close a file.

### Going to a Function (Subfunctions and Nested Functions)

To go to a function within an M-file (either a subfunction or a nested function), click the function button  on the toolbar. Select the subfunction or nested function you want to go to from the alphabetical listing of all subfunctions and nested functions in that M-file. The list does not include functions that are called from the M-file, but only lists lines in the current M-file that begin with a function statement.

The subfunction or nested function that the current line is part of is shown at the right side of the status bar.

## Finding Text in Files

There are different ways to find text in files:

- “Finding Text in the Current File” on page 6-23
- “Finding and Replacing Text in the Current File” on page 6-24
- “Finding Files or Text in Multiple Files” on page 6-25
- “Incremental Search” on page 6-25

### Finding Text in the Current File

Within the current file, select the text you want to find. From the **Edit** menu, select **Find Selection**. The next occurrence of that text is selected. Select **Find Selection** again (or **Find Next**) to continue finding the next occurrences of the text.

To find the previous occurrence of selected text (find backwards) in the current file, press **Ctrl+Shift+F3**, or select **Find Previous** from the **Edit** menu. The previous occurrence of the text is selected. Repeat to continue finding the previous occurrences of the text.


### Finding and Replacing Text in the Current File

You can search for specified text within multiple files, and replace the text within a file.

**Finding Text.** To search for text in files:

- 1 Click the find button  in the Editor/Debugger toolbar, or select **Edit -> Find and Replace**.

The **Find & Replace** dialog box appears.

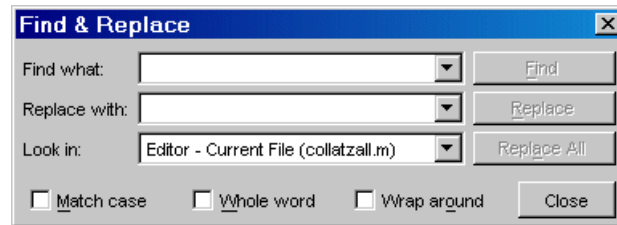

- 2 Complete the **Find & Replace** dialog box to find all occurrences of the text you specify.
  - a Type the text in the **Find what** field.
  - b In the **Look in** list box, select **Editor - Current File**.
  - c Limit the search using **Match case**, **Whole word**, or **Wrap around**. These settings are remembered for your next MATLAB session.
- 3 Click **Find**. The next occurrence of the text is selected in the file.

You can find the next or previous occurrence of the text in the same file, replace the text in the same file, or find and replace the text in another file.

**Finding the Next or Previous Occurrence of the Text.** To find the next occurrence of the text you entered in the **Find & Replace** dialog box, click the **Find** button (or press the **Enter** key) if the dialog box is open (and has focus). If the **Find & Replace** dialog box is closed or does not have focus, select **Edit -> Find Next**.

To find the previous occurrence of that text (find backwards), select **Edit -> Find Previous**.

If there are no more occurrences in the file, MATLAB beeps. With Wrap around selected, press **Find Next** or **Find Previous** to continue at the beginning or end of the file.

You can go to a different file and use the same **Find & Replace** dialog box to find the text in the other file. You can also replace the text.

**Function Alternative for Finding Text.** Use `lookfor` to search for the specified text in the help in all M-files on the search path.

**Replacing Text.** After finding text using the Find and Replace dialog box, you can replace the text in the current file.

- 1 In the **Replace with** field, type the text that is to replace the found text.
- 2 Click **Replace** to replace the text currently selected, or click **Replace All** to replace all instances in the currently open file.

The text is replaced. For **Replace All**, the number of instances that were replaced appears in the Editor status bar.

- 3 To save the changes to the file, select **Save** from the **File** menu.

You can repeat this for multiple files.

### Finding Files or Text in Multiple Files

To find directories and filenames that include specified text, or whose contents contain specified text, use **Edit -> Find Files**. For details, see “Finding Files and Content Within Files” on page 5-40.

### Incremental Search

With the incremental search feature, the cursor moves to the next or previous occurrence of the specified text in the current file. It is similar to the Emacs search feature. Incremental search is also available in the Command Window—see “Incremental Search” on page 3-23. To use the incremental search feature in the Editor/Debugger.

- 1 Position the cursor where you want the search to begin.

- 2 How you begin the incremental search depends on your setting for the Editor/Debugger key bindings preference and in which direction you want to search:
- Press **Ctrl+S** to search forward or **Ctrl+R** to search backward for Emacs and Macintosh key binding (for Macintosh key bindings, use the Command key instead of **Ctrl**).
  - Press **Ctrl+Shift+S** to search forward or **Ctrl+Shift+R** to search backward for Windows key bindings (for Macintosh key bindings, use the Command key instead of **Ctrl**).

An incremental search field appears in the left side of the status bar of the current file window. **F Inc Search** means search *Forward* from the cursor.

Incremental search field. **F** means search *Forward* from the cursor:

The screenshot shows the MATLAB Editor window titled "Editor - D:\mymfiles\collatzplot.m". The window contains a MATLAB function definition for "collatzplot(m)". The code is as follows:

```

1 function collatzplot(m)
2 % Plot length of sequence for Collatz problem
3 % Prepare figure
4 - clf
5 - set(gcf,'DoubleBuffer','on')
6 - set(gca,'XScale','linear')
7 %
8 % Determine and plot sequence and sequence length
9 - for N = 1:m
10 -     plot_seq = collatz(N);
11 -     seq_length(N) = length(plot_seq);
12 -     line(N,plot_seq,'Marker','.', 'MarkerSize',9, 'Color','blue')
13 -     drawnow
14 - end

```

The status bar at the bottom of the window shows "F Inc Search:" in a yellow field, followed by "collatzplot", "Ln 2", "Col 15", and "OVR". A vertical line points from the text "Incremental search field. F means search Forward from the cursor:" to the "F Inc Search:" field in the status bar.



- 3 In the incremental search field, type the text you want to find. For example, type plot.

As you type the first letter, p, the first occurrence of that letter after the cursor is highlighted. In the example shown, the cursor is in the middle of line 2, so the first occurrence of p, the p in problem on line 2, is highlighted.

```
1 function collatzplot(m)
2 % Plot length of sequence for Collatz problem
3 % Prepare figure
```

Incremental search is case sensitive for uppercase letters. In the above example, searching for uppercase P, would instead find the P in Prepare on line 3.

When you type the next letter in the term you are searching for, the first occurrence of the term becomes highlighted. In the example, when you add the letter l to the p so that the incremental search field now has pl, the pl in plot on line 8 is highlighted. When you add ot to the term in the incremental search field, the whole word plot in line 8 is highlighted.

- If you mistype in the incremental search field, use the **Back Space** key to remove the last letters and make corrections.
  - After finding the p, press **Ctrl+W** to highlight the rest of the word found, in this case plot, which also puts the complete word in incremental search field.
- 4 To find the next occurrence of plot in the file, press **Ctrl+S**. To find the previous occurrence of the text, press **Ctrl+R**.
  - 5 If MATLAB beeps, it either means the search is at the end or beginning of the file, or it means that the text was not found.
    - When the text is not found, Failing appears in the incremental search field. Modify the search term in the incremental search field and try again.
    - When at the end or beginning of the file, press **Ctrl+S** or **Ctrl+R** again to wrap to the beginning (or end) of the file and continue the search.

- 6 To end the incremental search, press **Esc** or **Enter**, or any other noncharacter or number key except **Tab** or **backspace**.

The incremental search field no longer appears in the status bar. The cursor is now located at the position where the string was last found.

If you press **Ctrl+S** or **Ctrl+R** after displaying the blank incremental search field, the search term from your previous incremental search appears in the field. Then the **Back Space** key deletes the entire previous search term, rather than just the last letter.

### Opening a Selection in an M-File

You can open a subfunction, function, file, variable, or Simulink model from within a file in the Editor/Debugger. Select the name and then right-click and select **Open Selection** from the context menu. Based on what the selection is, the Editor/Debugger performs a different action.


Selection	Action
Subfunction	Cursor moves to the subfunction within the current M-file. If no subfunction by that name is found in the current M-file, the Editor/Debugger runs the open function on the selection, which opens the selection in the appropriate tool, as shown for the other selection types in this table.
M-file or other text file	Opens in the Editor.
Figure file (.fig)	Opens in a figure window.
Variable	Opens in the Array Editor.
Model	Opens in Simulink.
Other	If the selection is some other type, <b>Open selection</b> looks for a matching file in a private directory in the current directory and performs the appropriate action.

After selecting a name, you can also choose **Help on Selection** from the context menu to see documentation for the item. For example, select a function, right-click and select **Help on Selection**. The reference page for that function opens in the Help browser, or if the reference page does not exist, the M-file help appears.

## Saving M-Files

After making changes to an M-file, you see an asterisk (\*) next to the filename in the title bar of the Editor/Debugger. This indicates there are unsaved changes to the file.

To save the changes, use one of the **Save** commands in the **File** menu:

- **Save**—Saves the file using its existing name. If the file is newly created, the **Save file as** dialog box opens, where you assign a name to the file before saving it. Another way to save is by using the save button  on the toolbar. If the file has not been changed, **Save** is grayed out, but you can instead use **Save As** from the **File** menu to save to a different filename.
- **Save As**—The **Save file as** dialog box opens, where you assign a name to the file and save it. By default, if you do not type an extension, MATLAB automatically assigns the `.m` extension to the filename. If you do not want an extension, type a `.` (period) after the filename.
- **Save All**—Saves all named files to their existing filenames. For all newly created files, the **Save file as** dialog box opens, where you assign a name to each file and save it.

You cannot save a file while in debug mode. If you try to, MATLAB displays a dialog box asking if you want to exit debug mode and then save the file.

---

**Note** Save any M-files you create and any M-files from the MathWorks that you edit in a directory that is not in the `$matlabroot/toolbox` directory tree. If you keep your files in `$matlabroot/toolbox` directories, they can be overwritten when you install a new version of MATLAB. Also note that locations of files in the `$matlabroot/toolbox` directory tree are loaded and cached in memory at the beginning of each MATLAB session to improve performance. If you save files to `$matlabroot/toolbox` directories using an external editor or add or remove files from these directories using file system operations, run `rehash toolbox` before you use the files in the current session. If you make changes to existing files in `$matlabroot/toolbox` directories using an external editor, run `clear functionname` before you use the files in the current session. For more information, see `rehash` or “Toolbox Path Caching in MATLAB” on page 1-10.

---

### Autosave

As you make changes to a file in the Editor/Debugger, every five minutes the Editor/Debugger automatically saves a copy of the file to a file of the same name but with an `.asv` extension. The autosaved copy is useful if you have system problems and lose changes made to your file. In that event, you can open the autosaved version, `filename.asv`, and then save it as `filename.m` to use the last good version of `filename`. For example, if you edit `filename.m` and do not save it for five minutes, MATLAB saves the file including the unsaved changes, to `filename.asv`.

Use autosave preferences to turn the autosave feature off or on, to specify the number of minutes between automatic saves, and to specify the file extension and location for autosaved files. For details, see “Autosave Preferences for the Editor/Debugger” in the online documentation.”


By default, autosaved files are not automatically deleted when you delete the source file. So if, for example, you rename or remove a file, delete the corresponding `.asv` file. You can select the **Close options** Editor/Debugger preference to **Automatically delete autosave files**; then when you close the source file in the Editor, it deletes the corresponding autosave file.

If the M-file you are editing is in a read-only directory, an autosave copy of the file is *not* made.

## Accessing Your Source Control System

If you use a source control system for M-files, you can access it from within the Editor/Debugger using **File -> Source Control**. For more information, see Chapter 9, “Source Control”.

## Running M-Files from the Editor/Debugger

You can run a script or a function that does not require an input argument directly from the Editor/Debugger. Click the run button  on the toolbar, or select **Run** from the **Debug** menu.

If the file is not in a directory on the search path or in the current directory, a dialog box appears, presenting you with options that allow you to run the file. You can either change the current directory to the directory containing the file, or you can add the directory containing the file to the search path.

Note that if the file has unsaved changes, running it from the Editor/Debugger automatically saves the changes before running. In that event, the menu item is **Save and Run**.

See “Running an M-File with Breakpoints” on page 6-43 for additional information about running M-files while debugging.


## Viewing Datatips

For a script M-file, position the cursor to the left of a variable on that line. Its current value appears—this is called a datatip, which is like a tooltip for data. The datatip stays in view until you move the cursor. If you have trouble getting the datatip to appear, click in the line and then move the cursor next to the variable.

In edit mode, the datatips display the values of variables in the base workspace, so this is useful for script M-files rather than function M-files. In a function M-file, if you hover over a variable that also exists in the base workspace, the datatip displays the value of the base workspace variable, not the value of the variable in the function M-file. To avoid confusion, you might want to turn datatips off while editing. Select **File -> Preferences -> Display**, and for **General Display Options**, clear the check mark for **Enable datatips in edit mode**.

While you are debugging, datatips always display and show the value of the variable in the function or base workspace.

## Printing M-Files

To print an entire M-file, select **File -> Print**, or click the print button  on the toolbar. To print the current selection, select **File -> Print Selection**. Complete the standard print dialog box that appears.

Specify printing options for the Editor/Debugger by selecting **File -> Page Setup**. For example, you can specify printing with a header. For more information, see “Page Setup Options for Printing” on page 2-40.

## Closing M-Files

To close the current M-file, select **Close filename** from the **File** menu, or click the close box in the Editor’s menu bar. This is different from the close box in the titlebar of the Editor/Debugger, which closes all open files in that Editor/Debugger window.

Close box for Editor/Debugger. Closes all open files in this Editor/Debugger window.



If each file is open in a separate window, close all the files at once using the **Close All Documents** item in the **Window** menu. Note that this also closes desktop documents of all types, including Array Editor documents.

When you close a file that has unsaved changes, you are prompted to save the file. If you do not want to be prompted, hold **Ctrl** and click the close box. The prompt will not appear and the document will close without saving any unsaved changes.

## Debugging M-Files

This section introduces general techniques for finding errors in M-files. It then illustrates MATLAB debugger features found in the Editor/Debugger as well as equivalent Command Window debugging functions, using a simple example. It includes these topics:

- “Finding Errors in M-Files” on page 6-33
- “Debugging Example—The Collatz Problem” on page 6-36
- “Debugging Process and Features” on page 6-39

### Finding Errors in M-Files

*Debugging* is the process by which you isolate and fix problems with your code. Debugging helps to correct two kinds of errors:

- **Syntax errors**—For example, misspelling a function name or omitting a parenthesis.
- **Run-time errors**—These errors are usually algorithmic in nature. For example, you might modify the wrong variable or code a calculation incorrectly. Run-time errors are usually apparent when an M-file produces unexpected results. Run-time errors are difficult to track down because the function’s local workspace is lost when the error forces a return to the MATLAB base workspace.

In addition to finding and fixing problems with your M-files, you might want to improve the performance and make other enhancements using MATLAB tools.

Use the following techniques to isolate the causes of errors and improve your M-files:

Technique or Tool	Description	For More Information
Syntax highlighting	Syntax highlighting helps you identify syntax errors in an M-file before you run the file.	“Syntax Highlighting” on page 6-19
Error messages	<p>When you run an M-file with a syntax error, MATLAB will most likely detect it and display an error message in the Command Window describing the error and showing its line number in the M-file. Click the underlined portion of the error message, or position the cursor within the message and press <b>Ctrl+Enter</b>. The offending M-file opens in the Editor/Debugger, scrolled to the line containing the error.</p> <p>To check for syntax errors in an M-file without running the M-file, use the <code>pcode</code> function.</p>	none
Editor/Debugger and Debugging Functions	The MATLAB Editor/Debugger and debugging functions are useful for correcting run-time errors because you can access function workspaces and examine or change the values they contain. You can set and clear <i>breakpoints</i> , indicators that temporarily halt execution halt in an M-file. While stopped at a breakpoint, you can change workspace contexts, view the function call stack, and execute the lines in an M-file one by one.	“Debugging Example—The Collatz Problem” on page 6-36 and “Debugging Process and Features” on page 6-39
Cells	In the Editor/Debugger, isolate sections of an M-file, called cells, so you can easily make changes to and run a single section.	“Rapid Code Iteration Using Cells” on page 6-63
M-Lint	Use M-Lint to help you verify the integrity of your code and learn about potential improvements. Access M-Lint from the Editor/Debugger by selecting <b>Tools -&gt; Check Code with M-Lint</b> .	“M-Lint Code Check Report” on page 7-25



Technique or Tool	Description	For More Information (Continued)
Profiler	Use the Profiler to help you improve performance and detect problems in your M-files. Access the Profiler from the Editor/Debugger by selecting <b>Tools -&gt; Open Profiler</b> .	“Profiling for Improving Performance” on page 7-35
Visual Directory and M-File Reports	The Visual Directory tool and M-File Reports can help you polish and package M-files before providing them to others to use. Access all of these tools from the Current Directory browser. You can run the Dependency Report for the current file directly from the Editor/Debugger—select <b>Tools -&gt; Show Dependency Report</b> .	“Visual Directory in Current Directory Browser” on page 7-2 and “Directory Reports in Current Directory Browser” on page 7-11

### Other Useful Techniques for Finding and Correcting Errors

- Add keyboard statements to the M-file—Keyboard statements stop M-file execution at the point where they appear and allow you to examine and change the function’s local workspace. This mode is indicated by a special prompt:  
K>>  
  
Resume function execution by typing return and pressing the **Enter** key. For more information, see the keyboard reference page.
- Remove selected semicolons from the statements in your M-file—Semicolons suppress the display of intermediate calculations in the M-file. By removing the semicolons, you instruct MATLAB to display these results on your screen as the M-file executes.
- List dependent functions—Use the `depfun` function to see the dependent functions. Similarly, use the dependency report in the Visual Directory tools.

## Debugging Example—The Collatz Problem

The example debugging session requires you to create two M-files, `collatz.m` and `collatzplot.m`, that produce data for the Collatz problem.

For any given positive integer,  $n$ , the Collatz function produces a sequence of numbers that always resolves to 1. If  $n$  is even, divide it by 2 to get the next integer in the sequence. If  $n$  is odd, multiply it by 3 and add 1 to get the next integer in the sequence. Repeat the steps until the next integer is 1. The number of integers in the sequence varies, depending on the starting value,  $n$ .

The Collatz problem is to prove that the Collatz function will resolve to 1 for all positive integers. The M-files for this example are useful for studying the Collatz problem. The file `collatz.m` generates the sequence of integers for any given  $n$ . The file `collatzplot.m` calculates the number of integers in the sequence for all integers from 1 through  $m$ , and plots the results. The plot shows patterns that can be further studied.

Following are the results when  $n$  is 1, 2, or 3.

<b>n</b>	<b>Sequence</b>	<b>Number of Integers in the Sequence</b>
1	1	1
2	2 1	2
3	3 10 5 16 8 4 2 1	8

### M-Files for the Collatz Problem

Following are the two M-files you use for the debugging example. To create these files on your system, open two new M-files. Select and copy the following code from the Help browser and paste it into the M-files. Save and name the files `collatz.m` and `collatzplot.m`. Save them to your current directory or add the directory where you save them to the search path. One of the files has an embedded error to illustrate the debugging features.

Code for collatz.m.

```
function sequence=collatz(n)
% Collatz problem. Generate a sequence of integers resolving to 1
% For any positive integer, n:
%   Divide n by 2 if n is even
%   Multiply n by 3 and add 1 if n is odd
%   Repeat for the result
%   Continue until the result is 1%

sequence = n;
next_value = n;
while next_value > 1
    if rem(next_value,2)==0
        next_value = next_value/2;
    else
        next_value = 3*next_value+1;
    end
    sequence = [sequence, next_value];
end
```

Code for collatzplot.m.

```
function collatzplot(m)
% Plot length of sequence for Collatz problem
% Prepare figure
clf
set(gcf,'DoubleBuffer','on')
set(gca,'XScale','linear')
%
% Determine and plot sequence and sequence length
for N = 1:m
    plot_seq = collatz(N);
    seq_length(N) = length(plot_seq);
    line(N,plot_seq,'Marker','.', 'MarkerSize',9,'Color','blue')
    drawnow
end
```


### Trial Run for Example

Try out `collatzplot` to see if it works correctly. Use a simple input value, for example, 3, and compare the results to those shown in the preceding table.

Typing

```
collatzplot(3)
```

produces the plot shown in the following figure.

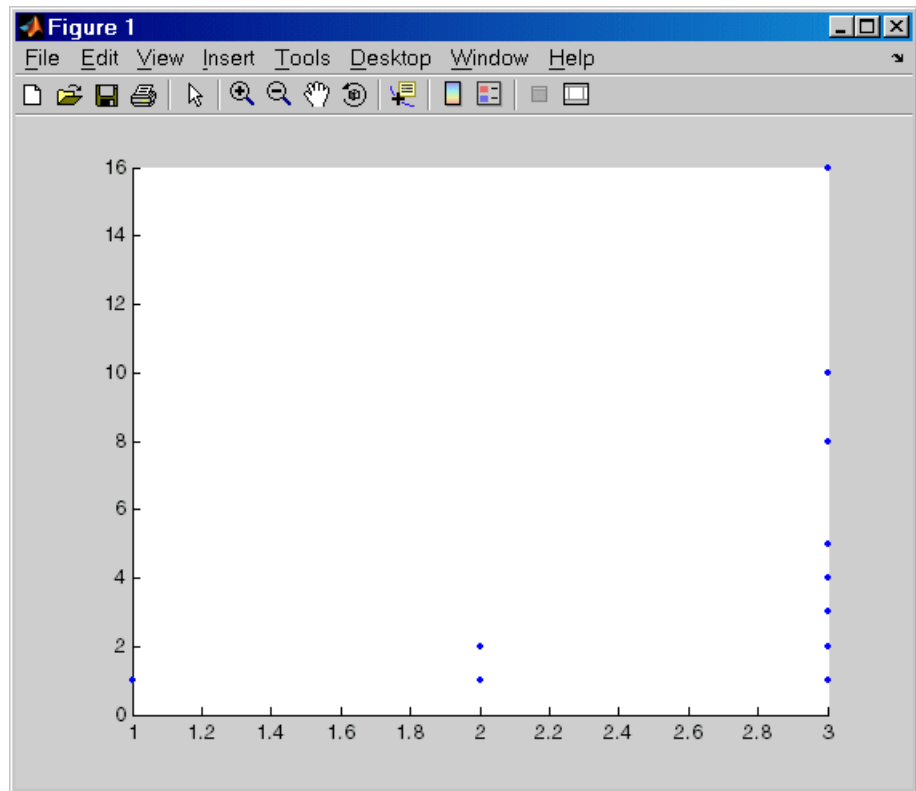

The plot for  $n = 1$  appears to be correct—for 1, the Collatz series is 1, and contains one integer. But for  $n = 2$  and  $n = 3$ , it is wrong because there should be only one value plotted for each integer, the number of integers in the sequence, which the preceding table shows to be 2 (for  $n = 2$ ) and 8 (for  $n = 3$ ).

Instead, multiple values are plotted. Use MATLAB debugging features to isolate the problem.

## Debugging Process and Features

You can debug the M-files using the Editor/Debugger, which is a graphical user interface, as well as using debugging functions from the Command Window. You can use both methods interchangeably. The example describes both methods. Debugging process consists of

- “Preparing for Debugging” on page 6-39
- “Setting Breakpoints” on page 6-40
- “Running an M-File with Breakpoints” on page 6-43
- “Stepping Through an M-File” on page 6-45
- “Examining Values” on page 6-46
- “Correcting Problems and Ending Debugging” on page 6-51

Some additional debugging options include

- “Conditional Breakpoints” on page 6-58
- “Error Breakpoints” on page 6-60

## Preparing for Debugging

Do the following to prepare for debugging:

- Open the file—To use the Editor/Debugger for debugging, open it with the file you will run.
- Save changes—If you are editing the file, save the changes before you begin debugging. If you try to run a file with unsaved changes from within the Editor, the file is automatically saved before it runs. If you run a file with unsaved changes from the Command Window, MATLAB runs the saved version of the file, so you will not see the results of your changes.
- Add the files to a directory on the search path or put them in the current directory—Be sure the file you run and any files it calls are in directories that are on the search path. If all files to be used are in the same directory, you can instead make that directory be the current directory.

### Example—Preparing for Debugging

Open the file `collatzplot.m`. Make sure the current directory is the directory in which you saved `collatzplot`.

### Setting Breakpoints

Set breakpoints to pause execution of the function so you can examine values where you think the problem might be. You can set breakpoints in the Editor/Debugger, using functions in the Command Window, or both.

There are three basic types of breakpoints you can set in M-files:


- A standard breakpoint, which stops at a specified line in an M-file. For details, see “Setting Standard Breakpoints” on page 6-41.
- A conditional breakpoint, which stops at a specified line in an M-file only under specified conditions. For details, see “Conditional Breakpoints” on page 6-58.
- An error breakpoint that stops in any M-file when it produces the specified type of warning, error, or NaN or infinite value. For details, see “Error Breakpoints” on page 6-60.

You can disable standard and conditional breakpoints so that MATLAB temporarily ignores them, or you can remove them. For details, see “Disabling and Enabling Breakpoints” on page 6-52. Breakpoints are not maintained after you exit the MATLAB session.

You can only set valid standard and conditional breakpoints at executable lines in saved files that are in the current directory or in directories on the search path. When you add or remove a breakpoint in a file that is not in a directory on the search path or in the current directory, a dialog box appears, presenting you with options that allow you to add or remove the breakpoint. You can either change the current directory to the directory containing the file, or you can add the directory containing the file to the search path.


You cannot set breakpoints while MATLAB is busy, for example, running an M-file, unless that M-file is paused at a breakpoint.

## Setting Standard Breakpoints

To set a standard breakpoint using the Editor/Debugger, click in the breakpoint alley at the line where you want to set the breakpoint. The breakpoint alley is the column on the left side of the Editor/Debugger, just right of the line number. Set breakpoints at lines that are preceded by a - (dash). Lines not preceded by a dash, such as comments or blank lines, are not executable—if you try to set a breakpoint there, it is actually set at the next executable line. Other ways to set a breakpoint are to position the cursor in the line and then click the Set/Clear Breakpoint button  on the toolbar, or select **Set/Clear Breakpoint** from the **Breakpoints** menu or the context menu. A breakpoint icon appears.

**Set Breakpoints for the Example.** It is unclear whether the problem in the example is in `collatzplot` or `collatz`. To start, set breakpoints in `collatzplot.m` at lines 10, 11, and 12. The breakpoint at line 10 allows you to step into `collatz` to see if the problem might be there. The breakpoints at lines 11 and 12 stop the program where you can examine the interim results.

Click where there is a - (dash) to set a breakpoint at that line. The red icon indicates a valid breakpoint is set at that line.

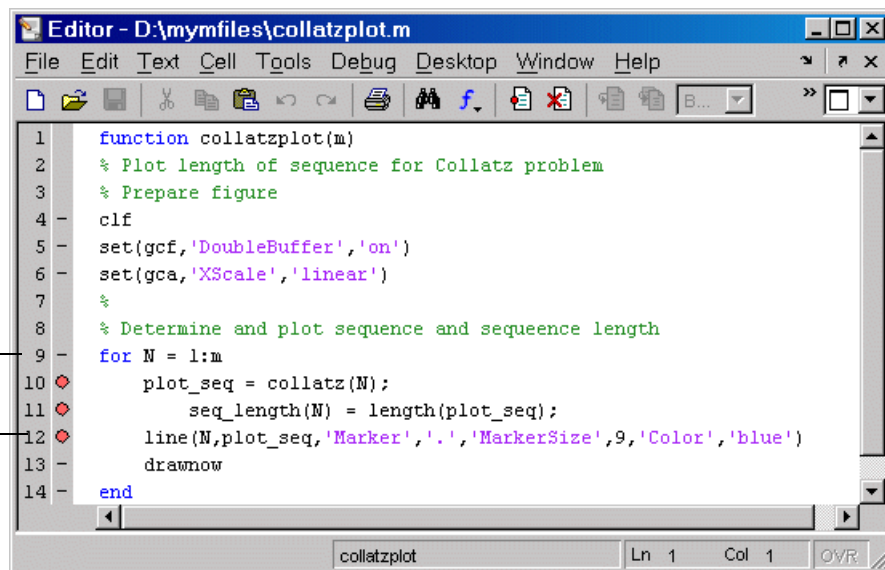

```

1  function collatzplot(m)
2  % Plot length of sequence for Collatz problem
3  % Prepare figure
4  clf
5  set(gcf,'DoubleBuffer','on')
6  set(gca,'XScale','linear')
7  %
8  % Determine and plot sequence and sequence length
9  for N = 1:m
10     plot_seq = collatz(N);
11     seq_length(N) = length(plot_seq);
12     line(N,plot_seq,'Marker','.', 'MarkerSize',9, 'Color','blue')
13     drawnow
14 end

```

The screenshot shows the MATLAB Editor window titled "Editor - D:\mymfiles\collatzplot.m". The code is displayed with line numbers 1 through 14. Red diamond icons are placed in the breakpoint alley (the column between the line numbers and the code) for lines 10, 11, and 12. The status bar at the bottom indicates "collatzplot Ln 1 Col 1 OVR".

**Valid (Red) and Invalid (Gray) Breakpoints.** Red breakpoints are valid standard breakpoints. If breakpoints are instead gray, they are not valid.

When breakpoints are gray, they are not valid. In this example, it is because the file has not been saved since changes were made to it. Save the file to make the breakpoints valid (red).

```

1 function collatzplot(m)
2 % Plot length of sequence for Collatz problem
3 % Prepare figure
4 clf
5 set(gcf,'DoubleBuffer','on')
6 set(gca,'XScale','linear')
7 %
8 % Determine and plot sequence and sequence length
9 for N = 1:m
10 plot_seq = collatz(N);
11 seq_length(N) = length(plot_seq);
12 line(N,plot_seq,'Marker','.', 'MarkerSize',9, 'Color','blue')
13 drawnow
14 end

```

Breakpoints are gray for either of these reasons:

- The file has not been saved since changes were made to it. Save the file to make breakpoints valid. The gray breakpoints become red, indicating they are now valid. Any gray breakpoints that were entered at invalid breakpoint lines automatically move to the next valid breakpoint line with the successful file save.
- There is a syntax error in the file. When you set a breakpoint, an error message appears indicating where the syntax error is. Fix the syntax error and save the file to make breakpoints valid.



## Function Alternative for Setting Breakpoints

To set a breakpoint using the debugging functions, use `dbstop`. For the example, type

```
dbstop in collatzplot at 10
dbstop in collatzplot at 11
dbstop in collatzplot at 12
```

Some useful related functions are

- `dbtype`—Lists the M-file with line numbers in the Command Window.
- `dbstatus`—Lists breakpoints.

## Running an M-File with Breakpoints

After setting breakpoints, run the M-file from the Command Window or the Editor/Debugger.

### Running the Example

For the example, run `collatzplot` for the simple input value, 3, by typing in the Command Window

```
collatzplot(3)
```

The example, `collatzplot`, requires an input argument and therefore runs only from the Command Window and not from the Editor/Debugger.

### Results of Running an M-File Containing Breakpoints


Running the M-file results in the following:

- The prompt in the Command Window changes to

```
K>>
```

indicating that MATLAB is in debug mode.

- The program pauses at the first breakpoint. This means that line will be executed when you continue. The pause is indicated in the Editor/Debugger by the green arrow just to the right of the breakpoint, which in the example, is line 10 of `collatzplot` as shown here.

```
10  plot_seq = collatz(N);
```

If you use debugging functions from the Command Window, the line at which you are paused is displayed in the Command Window. For the example, it would show

```
10 plot_seq = collatz(N);
```





- The function displayed in the **Stack** field on the toolbar changes to reflect the current function. The call stack includes subfunctions as well as called functions. If you use debugging functions from the Command Window, use `dbstack` to view the current call stack.
- If the file you are running is not in the current directory or a directory on the search path, you are prompted to either add the directory to the path or change the current directory.

In debug mode, you can set breakpoints, step through programs, examine variables, and run other functions.

## Stepping Through an M-File

While debugging, you can step through an M-file, pausing at points where you want to examine values.

Use the step buttons or the step items in the **Debug** menu of the Editor/Debugger or desktop, or use the equivalent functions.

Toolbar Button	Debug Menu Item	Description	Function Alternative
	<b>Continue or Run or Save and Run</b>	Continue execution of M-file until completion or until another breakpoint is encountered. The menu item says <b>Run</b> or <b>Save and Run</b> if a file is not already running.	dbcont
None	<b>Go Until Cursor</b>	Continue execution of M-file until the line where the cursor is positioned. Also available on the context menu.	None
	<b>Step</b>	Execute the current line of the M-file.	dbstep
	<b>Step In</b>	Execute the current line of the M-file and, if the line is a call to another function, step into that function.	dbstep in
	<b>Step Out</b>	After stepping in, run the rest of the called function or subfunction, leave the called function, and pause.	dbstep out

### Continue Running in the Example

In the example, `collatzplot` is paused at line 10. Because the problem results are correct for  $N/n = 1$ , we want to continue running until  $N/n = 2$ . Press the continue button three times to move through the breakpoints at lines 10, 11, and 12. Now the program is again paused at the breakpoint at line 10.

### Stepping In in the Example

Now that `collatzplot` is paused at line 10 during the second iteration, use the step-in button or type `dbstep in` in the Command Window to step into `collatz` and walk through that M-file. Stepping into line 10 of `collatzplot` goes to line 9 of `collatz`. If `collatz` is not open in the Editor/Debugger, it automatically opens if you have selected **Debug -> Open M-Files When Debugging**.

The pause indicator at line 10 of `collatzplot` changes to a hollow arrow ⇨, indicating that MATLAB control is now in a subfunction called from the main program. The call stack shows that the current function is now `collatz`.

In the called function, `collatz` in the example, you can do the same things you can do in the main (calling) function—set breakpoints, run, step through, and examine values.

### Examining Values

While the program is paused, you can view the value of any variable currently in the workspace. Examine values when you want to see whether a line of code has produced the expected result or not. If the result is as expected, continue running or step to the next line. If the result is not as expected, then that line, or a previous line, contains an error. Use the following methods to examine values:

- “Selecting the Workspace” on page 6-47
- “Viewing Values as Datatips in the Editor/Debugger” on page 6-47
- “Viewing Values in the Command Window” on page 6-48
- “Viewing Values in the Workspace Browser and Array Editor” on page 6-49
- “Evaluating a Selection” on page 6-50

Many of these methods are used in “Examining Values in the Example” on page 6-50.

## Selecting the Workspace

Variables assigned through the Command Window and created using scripts are considered to be in the base workspace. Variables created in each function have their own workspace. To examine a variable, you must first select its workspace. When you run a program, the current workspace is shown in the **Stack** field. To examine values that are part of another function workspace currently running or the base workspace, first select that workspace from the list in the **Stack** field.


If you use debugging functions from the Command Window, use `dbstack` to display the call stack. Use `dbup` and `dbdown` to change to a different workspace. Use `who` or `whos` to list the variables in the current workspace.

**Workspace in the Example.** At line 10 of `collatzplot`, we stepped in, putting us at line 9 of `collatz`. The **Stack** shows that `collatz` is the current workspace.

## Viewing Values as Datatips in the Editor/Debugger

In the Editor/Debugger, position the cursor to the left of a variable on that line. Its current value appears—this is called a datatip, which is like a tooltip for data. The datatip stays in view until you move the cursor. If you have trouble getting the datatip to appear, click in the line and then move the cursor next to the variable.

**Datatips in the Example.** Position the cursor over `n` in line 9 of `collatz`. The datatip shows that `n = 2`, as expected.

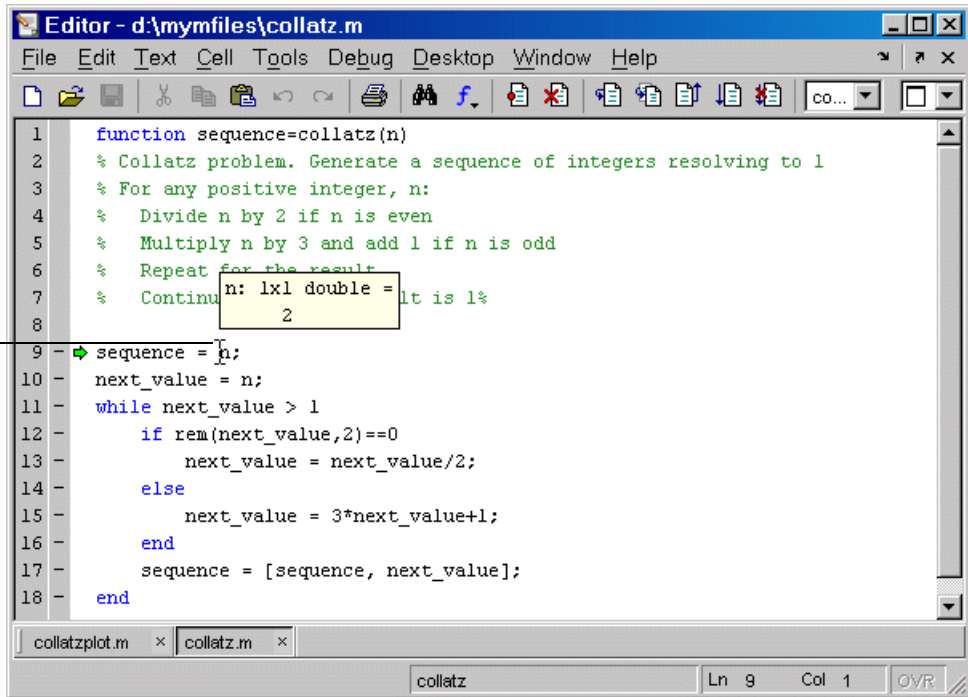

## Viewing Values in the Command Window

You can examine values while in debug mode at the `K>>` prompt. To see the variables currently in the workspace, use `who`. Type a variable name in the Command Window and MATLAB displays its current value. For the example, to see the value of `n`, type

```
n
```


MATLAB returns the expected result

```
n =
    2
```

and displays the debug prompt, `K>>`.

## Viewing Values in the Workspace Browser and Array Editor

You can view the value of variables in the **Value** column of the Workspace browser. The Workspace browser displays all variables in the current workspace. Use the **Stack** in the Workspace browser to change to another workspace and view its variables.

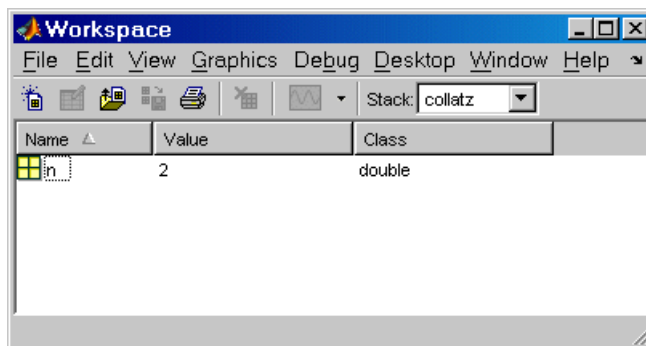


The **Value** column does not show all details for all variables. To see details, double-click a variable in the Workspace browser. The Array Editor opens, displaying the content for that variable. You can open the Array Editor directly for a variable using `openvar`.

To see the value of `n` in the Array Editor for the example, type

```
openvar n
```

and the Array Editor opens, showing that `n = 2` as expected.

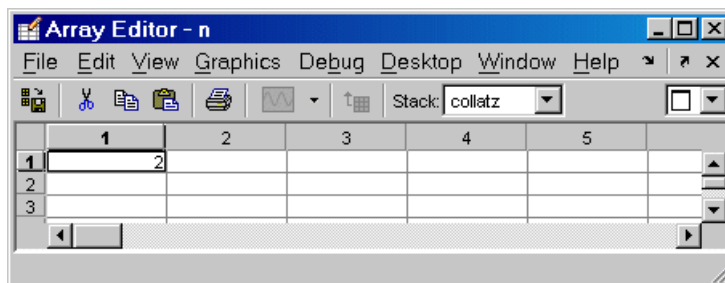


## Evaluating a Selection

Select a variable or equation in an M-file in the Editor/Debugger. Right-click and select **Evaluate Selection** from the context menu. MATLAB displays the value of the variable or equation in the Command Window. You cannot evaluate a selection while MATLAB is busy, for example, running an M-file.

## Examining Values in the Example

Step from line 9 through line 13 in `collatz`. Step again, and the pause indicator jumps to line 17, just after the `if` loop, as expected. Step again, to line 18, check the value of `sequence` in line 17 and see that the array is

```
2 1
```

as expected for  $n = 2$ . Step again, which moves the pause indicator from line 18 to line 11. At line 11, step again. Because `next_value` is now 1, the `while` loop ends. The pause indicator is at line 11 and appears as a green down arrow . This indicates that processing in the called function is complete and program control will return to the calling program. Step again from line 11 in `collatz` and execution is now paused at line 10 in `collatzplot`.

Note that instead of stepping through `collatz`, the called function, as was just done in this example, you can step out from a called function back to the calling function, which automatically runs the rest of the called function and returns to the next line in the calling function. To step out, use the step-out button or type `dbstep out` in the Command Window.

In `collatzplot`, step again to advance to line 11, then line 12. The variable `seq_length` in line 11 is a vector with the elements

```
1 2
```

which is correct.

Finally, step again to advance to line 13. Examining the values in line 12,  $N = 2$  as expected, but the second variable, `plot_seq`, has two values, where only one value is expected. While the value for `plot_seq` is as expected

```
2 1
```

it is the incorrect variable for plotting. Instead, `seq_length(N)` should be plotted.



## Correcting Problems and Ending Debugging

These are some of the ways to correct problems and end the debugging session:

- “Changing Values and Checking Results” on page 6-51
- “Ending Debugging” on page 6-51
- “Disabling and Clearing Breakpoints” on page 6-52
- “Correcting an M-File” on page 6-53
- “Completing the Example” on page 6-54

Many of these features are used in “Completing the Example” on page 6-54.

### Changing Values and Checking Results

While debugging, you can change the value of a variable in the current workspace to see if the new value produces expected results. While the program is paused, assign a new value to the variable in the Command Window, Workspace browser, or Array Editor. Then continue running or stepping through the program. If the new value does not produce the expected results, the program has a different or another problem.


### Ending Debugging

After identifying a problem, end the debugging session. You must end a debugging session if you want to change and save an M-file to correct a problem, or if you want to run other functions in MATLAB.

---

**Note** It is best to quit debug mode before editing an M-file. If you edit an M-file while in debug mode, you can get unexpected results when you run the file. If you do edit an M-file while in debug mode, breakpoints turn gray, indicating that results might not be reliable. See “Valid (Red) and Invalid (Gray) Breakpoints” on page 6-42 for details.

---

To end debugging, click the exit debug mode icon , or select **Exit Debug Mode** from the **Debug** menu.

You can instead use the function `dbquit` to end debugging.


After quitting debugging, the pause indicators in the Editor/Debugger display no longer appear, and the normal prompt `>>` appears in the Command Window instead of the debugging prompt, `K>>`. You can no longer access the call stack.

### Disabling and Clearing Breakpoints

Disable a breakpoint to temporarily ignore it. Clear a breakpoint to remove it.

**Disabling and Enabling Breakpoints.** You can temporarily disable selected breakpoints so the program ignores them and runs uninterrupted, for example, after you think you identified and corrected a problem. This is especially useful for conditional breakpoints—see “Conditional Breakpoints” on page 6-58.

To disable a breakpoint, right-click the breakpoint icon and select **Disable Breakpoint** from the context menu, or click anywhere in a line and select **Enable/Disable Breakpoint** from the **Breakpoints** or context menu. You can also disable a conditional breakpoint by clicking the breakpoint icon. The breakpoint icon has an X through it as shown here.

```
Disabled breakpoint 10  plot_seq = collatz(N);
```


After disabling a breakpoint, you can enable it to make it active again, or clear it. To enable it, right-click the breakpoint icon and select **Enable Breakpoint** from the context menu, or click anywhere in a line and select **Enable/Disable Breakpoint** from the **Breakpoints** or context menu. The X no longer appears on the breakpoint icon and program execution will pause at that line.

When you run `dbstatus`, the resulting message for a disabled breakpoint is

```
Breakpoint on line 10 has conditional expression 'false'.
```

**Clearing (Removing) Breakpoints.** All breakpoints remain in a file until you clear (remove) them or until they are automatically cleared. Clear a breakpoint after determining that a line of code is not causing a problem.

To clear a breakpoint in the Editor/Debugger, click anywhere in a line and select **Set/Clear Breakpoint** from the **Breakpoints** or context menu. The breakpoint for that line is cleared. Another way to clear a breakpoint is to click a standard breakpoint icon, or a disabled conditional breakpoint icon.

To clear all breakpoints in all files, select **Breakpoints -> Clear All Breakpoints**, or click the equivalent button  on the toolbar.

The function that clears breakpoints is `dbclear`. To clear all breakpoints, use `dbclear all`. For the example, clear all of the breakpoints in `collatzplot` by typing

```
dbclear all in collatzplot
```

Breakpoints are automatically cleared when you

- End the MATLAB session
- Clear the M-file using `clear name` or `clear all`

---

**Note** When `clear name` or `clear all` is in a statement in an M-file that you are debugging, it clears the breakpoints.

---

### Correcting an M-File

To correct a problem in an M-file:

**1** Quit debugging.

Do not make changes to an M-file while MATLAB is in debug mode. If you do edit an M-file while in debug mode, breakpoints turn gray, indicating that results might not be reliable. See “Valid (Red) and Invalid (Gray) Breakpoints” on page 6-42 for details.

**2** Make changes to the M-file.

**3** Save the M-file.

**4** Set, disable, or clear breakpoints, as appropriate.


**5** Run the M-file again to be sure it produces the expected results.

### Completing the Example

To correct the problem in the example, do the following:

- 1** End the debugging session. One way to do this is to select **Exit Debug Mode** from the **Debug** menu.
- 2** In `collatzplot.m` line 12, change the string `plot_seq` to `seq_length(N)` and save the file.
- 3** Clear the breakpoints in `collatzplot.m`. One way to do this is by typing  
`dbclear all in collatzplot`  
in the Command Window.
- 4** Run `collatzplot` for `m = 3` by typing  
`collatzplot(3)`  
in the Command Window.

- 5 Verify the result. The figure shows that the length of the Collatz series is 1 when  $n = 1$ , 2 when  $n = 2$ , and 8 when  $n = 3$ , as expected.

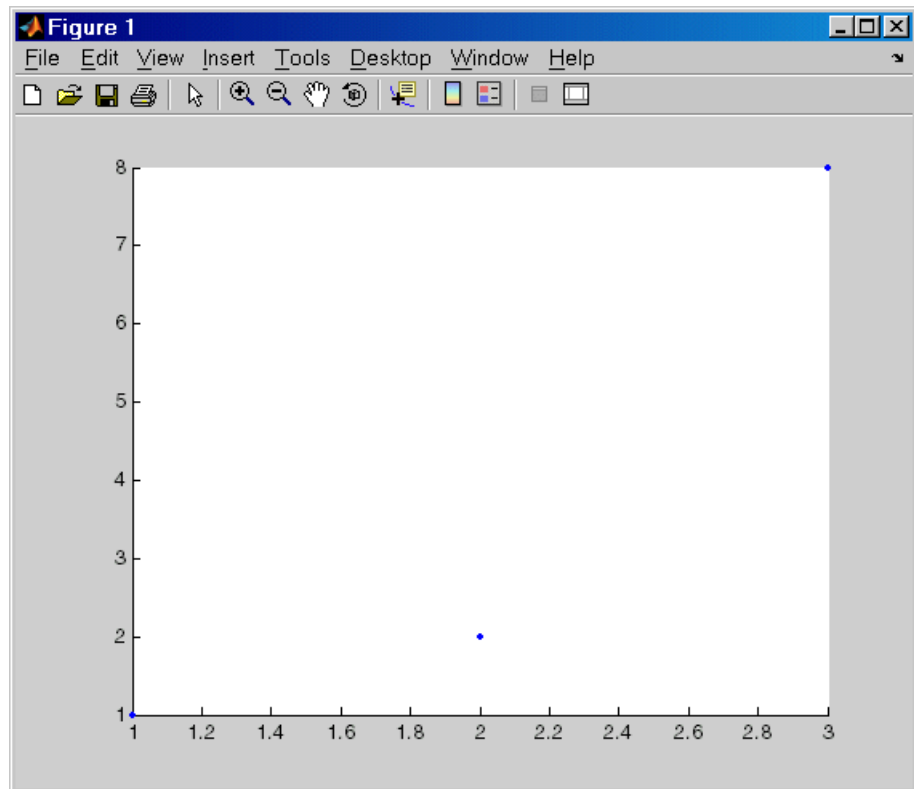

- 6 Test the function for a slightly larger value of  $m$ , such as 6, to be sure the results are still accurate. To make it easier to verify `collatzplot` for  $m = 6$  as well as the results for `collatz`, add this line at the end of `collatz.m`  
sequence

which displays the series in the Command Window. The results for when  $n = 6$  are

sequence =

```
6    3    10    5    16    8    4    2    1
```

Then run `collatzplot` for  $m = 6$  by typing

```
collatzplot(6)
```


- 7 To make debugging easier, you ran `collatzplot` for a small value of  $m$ . Now that you know it works correctly, run `collatzplot` for a larger value to produce more interesting results. Before doing so, you might want to suppress output for the line you just added in step 6, line 19 of `collatz.m`, by adding a semicolon to the end of the line so it appears as

```
sequence;
```

Then run

```
collatzplot(500)
```

The following figure shows the lengths of the Collatz series for  $n = 1$  through  $n = 500$ .

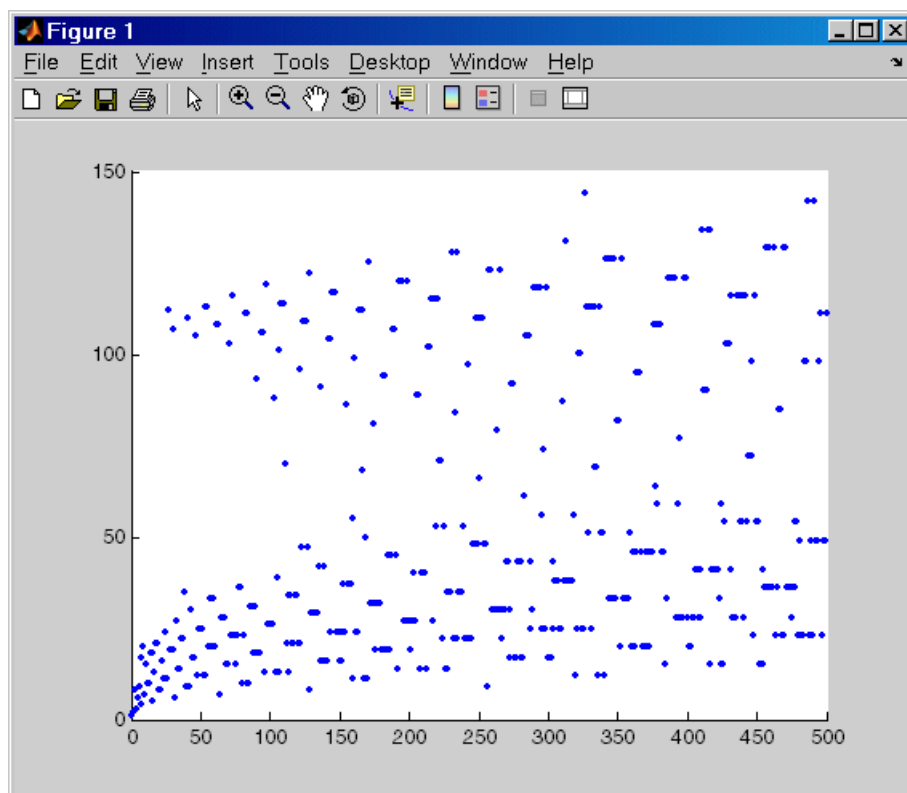

### Conditional Breakpoints

Set conditional breakpoints to cause MATLAB to stop at a specified line in a file only when the specified condition is met. One particularly good use for conditional breakpoints is when you want to examine results after a certain number of iterations in a loop. For example, set a breakpoint at line 10 in `collatzplot`, specifying that MATLAB should stop only if `N` is greater than or equal to 2. This section covers the following topics:


- “Setting Conditional Breakpoints” on page 6-58
- “Copying, Modifying, Disabling, and Clearing Conditional Breakpoints” on page 6-59
- “Function Alternative for Conditional Breakpoints” on page 6-59

### Setting Conditional Breakpoints

To set a conditional breakpoint, follow these steps:

- 1 Click in the line where you want to set the conditional breakpoint. Then select **Set/Modify Conditional Breakpoint** from **Breakpoints** or context menu. If an standard breakpoint already exists at that line, use this same method to make it conditional.

The MATLAB Editor conditional breakpoint dialog box opens.

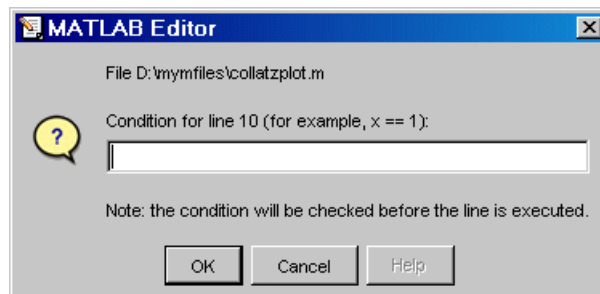



- 2** Type a condition in the dialog box, where a condition is any legal MATLAB expression that returns a logical scalar value. Click **OK**. As noted in the dialog box, the condition is evaluated before running the line. For example, at line 10 in `collatzplot`, enter

```
N>=2
```

A yellow breakpoint icon appears in the breakpoint alley at that line.

```

9 - for N = 1:m
10 - plot_seq = collatz(N);
11 - seq_length(N) = length(plot_seq);
12 - line(N,plot_seq,'Marker','.', 'MarkerSize',9,'Color','blue')
13 - drawnow
14 - end

```

When you run the file, MATLAB enters debug mode and pauses at the line only when the condition is met. In the `collatzplot` example, MATLAB runs through the for loop once and pauses on the second iteration at line 10 when `N` is 2. If you continue executing, MATLAB pauses at line 10 on the third iteration when `N` is 3.

### Copying, Modifying, Disabling, and Clearing Conditional Breakpoints

To copy a conditional breakpoint, right-click the icon in the breakpoint alley and select **Copy** from the context menu. Then right-click in the breakpoint alley at the line where you want to paste the conditional breakpoint and select **Paste** from the context menu.

Modify the condition for the breakpoint in the current line by selecting **Set/Modify Conditional Breakpoint** from the **Breakpoints** or context menu.

Click a conditional breakpoint icon to disable it. Click a disabled conditional breakpoint to clear it.

### Function Alternative for Conditional Breakpoints

Use the `dbstop` function with appropriate arguments to set conditional breakpoints from the Command Window, and use `dbclear` to clear them. Use `dbstatus` to view the breakpoints currently set, including any conditions, which are listed in the expression field. If no condition exists, the value in the expression field is `[]` (empty).


## Error Breakpoints

Set error breakpoints to stop program execution and enter debug mode when MATLAB encounters a problem. Unlike standard and conditional breakpoints, you do not set these breakpoints at a specific line in a specific file. Rather, once set, MATLAB stops at any line in any file when the error condition specified via the error breakpoint occurs. MATLAB then enters debug mode and opens the file containing the error, with the pause indicator at the line containing the error. Files open only when the you select **Debug -> Open M-Files When Debugging**. Error breakpoints remain in effect until you clear them or until you end the MATLAB session. You can set error breakpoints from the Debug menu in any desktop tool. This section covers the following topics:

- “Setting Error Breakpoints” on page 6-60
- “Error Breakpoint Types and Options” on page 6-61 (Errors, Try/Catch Errors, Warnings, NaN or Inf, Use Message Identifiers)
- “Function Alternative for Error Breakpoints” on page 6-62

### Setting Error Breakpoints

To set error breakpoints, select **Debug -> Stop if Errors/Warnings**. In the resulting **Stop if Errors/Warnings for All Files** dialog box, specify error breakpoints on all appropriate tabs and click **OK**. To clear error breakpoints, select the **Never stop if ...** option for all appropriate tabs and click **OK**.

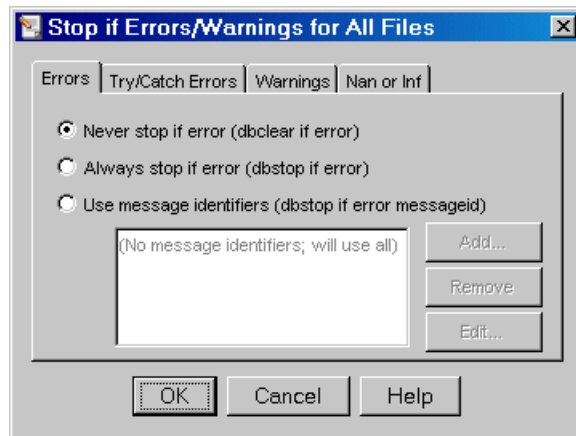

For example, to pause execution when a warning occurs, select the **Warnings** tab and from it select **Always stop if warning**, then click **OK**. When you run an M-file and MATLAB produces a warning, execution pauses, MATLAB enters debug mode, and the file opens in the Editor/Debugger at the line that produced the warning. To remove the warning breakpoint, select **Never stop if warning** in the **Warnings** tab and click **OK**.

### Error Breakpoint Types and Options

The four basic types of error breakpoints you can set are **Errors**, **Try/Catch Errors**, **Warnings**, and **NaN or Inf**. Select the **Always stop if ...** option for each tab to set that type of breakpoint. Select the **Use message identifiers ...** option to limit each type of error breakpoint (except Nan or Inf) so that execution stops only for specific errors.

**Errors.** When an error occurs, execution stops, unless the error is in a `try...catch` block. MATLAB enters debug mode and opens the M-file to the line that produced the error. You cannot resume execution.

**Try/Catch Errors.** When an error occurs in a `try...catch` block, execution pauses. MATLAB enters debug mode and opens the M-file to the line that produced the error. You can resume execution or use debugging features.

**Warnings.** When a warning is produced, MATLAB pauses, enters debug mode, and opens the M-file, paused at the line that produced the warning. You can resume execution or use debugging features.

**NaN or Inf.** When MATLAB encounters a NaN (not-a-number) or Inf (infinite) value, it pauses, enters debug mode, and opens the M-file, paused at the line that encountered the value. You can resume execution or use debugging features.

**Use Message Identifiers.** Execution stops only when MATLAB encounters one of the specified errors. This option is not available for the **Nan or Inf** type of error breakpoint. To use this feature, select the **Errors, Try/Catch Errors, or Warnings** tab, select the **Use Message Identifiers** option, and click the **Add** button.

In the resulting **Add Message Identifier** dialog box, supply the message identifier of the specific error you want to stop for, where the identifier is of the form `component:message`, and click **OK**. The message identifier you added appears in the **Stop If Errors/Warnings for All Files** dialog box, where you click **OK**. You can add multiple message identifiers, and edit or remove them.

One way to obtain an error message identifier generated by a MATLAB function for example, is to produce the error, and then run the `lasterror` function. MATLAB returns the error message and identifier. Copy the identifier from the Command Window output and paste it into the **Add Message Identifier** dialog box. An example of an error message identifier is `MATLAB:UndefinedFunction`. Similarly, to obtain a warning message identifier, produce the warning and then run `[m,id] = lastwarn;` MATLAB returns the last warning identifier to `id`. An example of a warning message identifier is `MATLAB:divideByZero`.

### **Function Alternative for Error Breakpoints**

The function equivalent for each option appears in the **Stop if Errors/Warnings for All Files** dialog box. For example, the function equivalent for **Always stop if error** is `dbstop if error`. Use the `dbstop` function with appropriate arguments to set error breakpoints from the Command Window, and use `dbclear` to clear them. Use `dbstatus` to view the error breakpoints currently set. Error breakpoints are listed in the `cond` field and message identifiers for breakpoints are listed in the `identifier` field of the `dbstatus` output.

## Rapid Code Iteration Using Cells


When working with MATLAB, you often experiment with your code—modifying it, testing it, and updating it—until you have an M-file that does what you want. Use the cell features in the MATLAB Editor to make the experimental phase of your work with M-file scripts easier. You can also use cell features with function M-files, but there are some restrictions—see “Using Cells in Function M-Files” on page 6-73.

If you are using the Help browser, watch the Rapid Code Iteration Using Cells video demo for an overview of the major functionality.


The overall structure of many M-file scripts seems to naturally consist of multiple sections. Especially for larger files, you often focus efforts on a single section at a time, refining the code in just that section. To facilitate this process, use M-file *cells*, where a cell is a defined section of code.

This is the overall process of using cells for rapid code iteration:

- 1** In the MATLAB Editor, enable cell mode. Select **Cell -> Enable Cell Mode**. Items in the **Cell** menu become selectable and the cell toolbar appears.
- 2** Define the boundaries of the cells in an M-file script using cell features. Cells are denoted by a specialized comment syntax. For details, see “Defining Cells” on page 6-64.
- 3** Once you define the cells, use cell features to navigate quickly from cell to cell in your file, evaluate the code in a cell in the base workspace, and view the results. To facilitate experimentation, use cell features to modify values in cells and then reevaluate them, to see how different values impact the result. For details, see “Navigating and Evaluating with Cells” on page 6-69.
- 4** Cells are also useful if you want to share your results by publishing your work in a presentation format, such as an HTML document. See Chapter 8, “Publishing to HTML, XML, LaTeX, Word, and PowerPoint Using Cells”, for details.

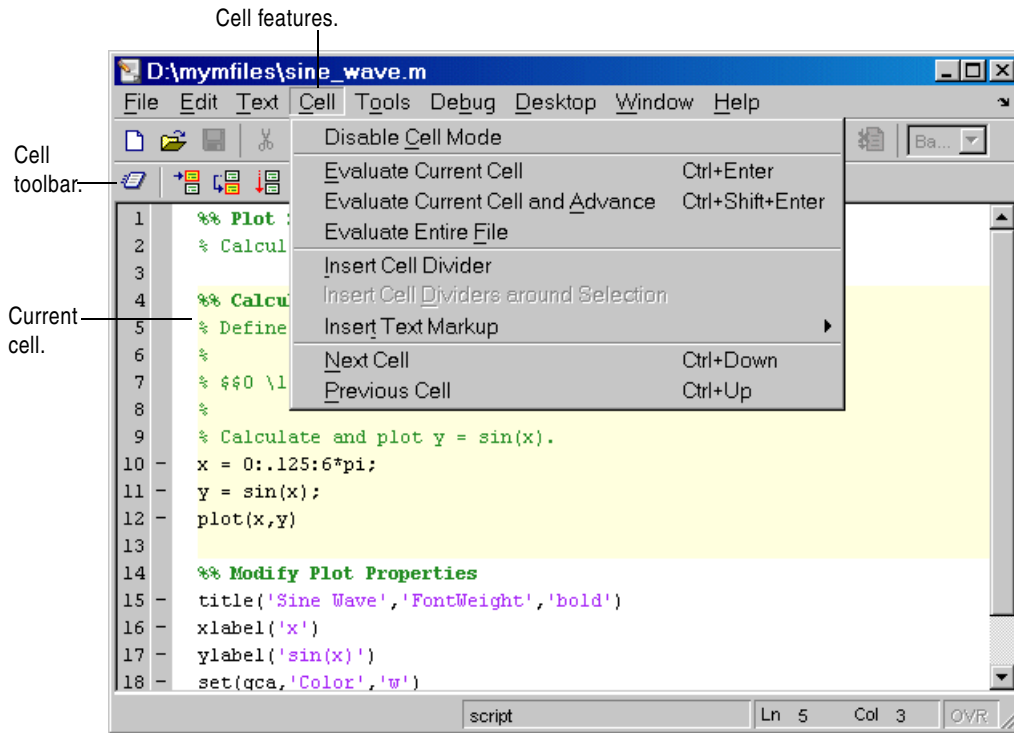

## Defining Cells

Cell features operate on contiguous lines of code you want to evaluate as a whole in an M-file script, called cells. To define a cell, first be sure that cell mode is enabled (see step 1 on page 6-63). Position the cursor just before the line you want to start the cell and then select **Cell -> Insert Cell Divider** or click the cell divider button . MATLAB inserts a line after the cursor containing two percent signs (%%), which is the “start new cell” indicator to MATLAB. A cell consists of the line starting with %% and the lines that follow, up to the start of the next cell, which is identified by %% at the start of a line.

You can also define a cell by entering two percent signs (%%) at the start of the line where you want to begin the new cell. Alternatively, select the lines of code to be in the cell and then select **Cell -> Insert Cell Dividers Around Selection**.

You can, of course, define a cell at the start of a new file, enter code for the cell, define the start of the next cell, enter its code, and so on. Redefine cells by defining new cells, removing existing cells, and moving lines of code.

MATLAB will not execute the code in lines beginning with `%%`, so be sure to put any executable code for the cell on the following line. For program control statements, such as `if ... end`, a cell must contain both the opening and closing statements, that is, it must contain both the `if` and the `end` statements.

Note that the first cell in a file does not have to begin with `%%`. MATLAB automatically understands any lines above the first `%%` line to be a cell. If there are no cell dividers in an M-file, MATLAB understands the entire file to be a single cell.

### Cell Titles and Highlighting

After the `%%`, type a space followed by a description of the cell. The Editor emphasizes the special meaning of the start of a cell by making any text following the percent signs and space bold. The text on the `%%` line is called the *cell title* (like a section title). Including cell titles is optional, however, they improve readability of the file and are used for cell publishing features.

When the cursor is positioned in any line within a cell, the Editor highlights the entire cell with a yellow background. This identifies it as the *current cell*. For example, the highlighted cell is the cell evaluated by the **Evaluate Current Cell** option on the **Cell** menu.


If you want cell titles to appear in plain rather than bold text, or if you do not want yellow highlighting for the current cell, change these preferences. Select **File -> Preferences -> Editor/Debugger -> Display** and change the appropriate **Cell display options**.

### Example—Define Cells

This examples defines two cells for a simple M-file called `sine_wave`, shown in the following code and figure. The first cell creates the basic results, while the second decorates the plot. The two cells in this example allow you to experiment with the plot of the data first, and then when that is final, change the plot properties to affect the style of presentation.

```
% Define the range for x.  
% Calculate and plot y = sin(x).  
x = 0:1:6*pi;  
y = sin(x);  
plot(x,y)  
title('Sine Wave','FontWeight','bold')  
xlabel('x')  
ylabel('sin(x)')  
set(gca,'Color','w')  
set(gcf, 'MenuBar', 'none')
```

M-file before  
defining cells.

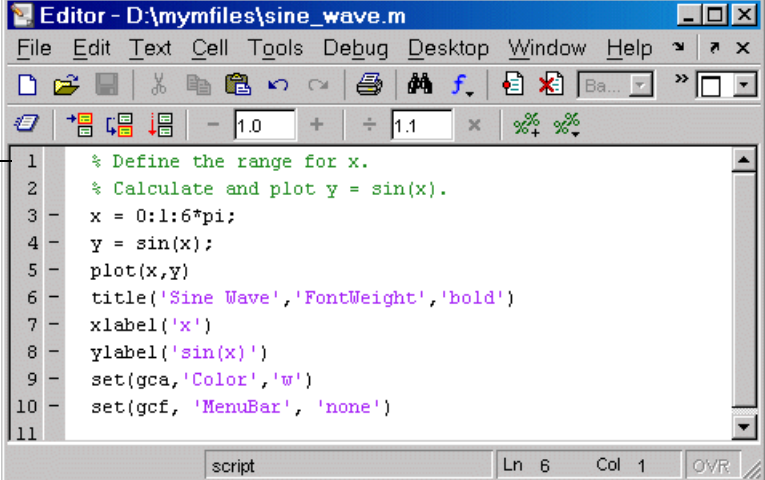

```
Editor - D:\mymfiles\sine_wave.m  
File Edit Text Cell Tools Debug Desktop Window Help  
1 % Define the range for x.  
2 % Calculate and plot y = sin(x).  
3 x = 0:1:6*pi;  
4 y = sin(x);  
5 plot(x,y)  
6 title('Sine Wave','FontWeight','bold')  
7 xlabel('x')  
8 ylabel('sin(x)')  
9 set(gca,'Color','w')  
10 set(gcf, 'MenuBar', 'none')  
11  
script Ln 6 Col 1 OVR
```



**1** Select **Cell -> Enable Cell Mode**, if it is not already enabled.

**2** Position the cursor at the start of the first line. Select **Cell -> Insert Cell Divider**.

The Editor inserts %% as the first line and moves the rest of the file down one line. All lines are highlighted in yellow, indicating that the entire file is a single cell.

**3** Enter a cell title following the %%. Type a space first, followed by the description.

Calculate and Plot Sine Wave

**4** Position the cursor at the start of line 7, title . . . . Select **Cell -> Insert Cell Divider**.


The Editor inserts a line containing only %% at line 7 and moves the remaining lines down by one line. Lines 7 through 12 are highlighted in yellow, indicating they comprise the current cell.

**5** Enter a cell title for the new cell. On line 7, type a space after the %%, followed by the description

Modify Plot Properties

Save the file. The file appears as shown in this figure.

M-file after  
defining  
cells.

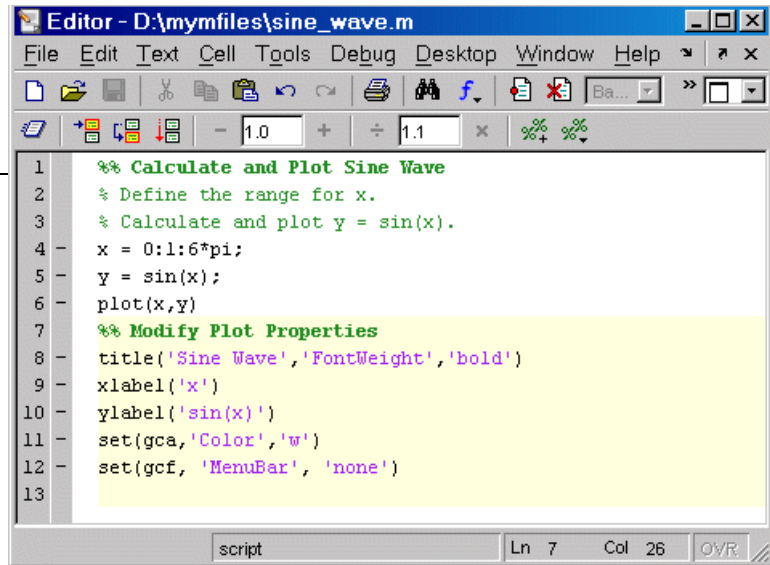

The screenshot shows the MATLAB Editor window titled "Editor - D:\myfiles\sine\_wave.m". The window has a menu bar (File, Edit, Text, Cell, Tools, Debug, Desktop, Window, Help) and a toolbar. The code in the editor is as follows:

```
1  %% Calculate and Plot Sine Wave
2  % Define the range for x.
3  % Calculate and plot y = sin(x).
4  - x = 0:1:6*pi;
5  - y = sin(x);
6  - plot(x,y)
7  %% Modify Plot Properties
8  - title('Sine Wave','FontWeight','bold')
9  - xlabel('x')
10 - ylabel('sin(x)')
11 - set(gca,'Color','w')
12 - set(gcf, 'MenuBar', 'none')
13
```

The status bar at the bottom indicates "script", "Ln 7", "Col 26", and "OVR".

## Removing Cells


To remove a cell, delete one of the percent signs (%) from the line that starts the cell. This changes the line from a cell to a standard comment and merges the cell with the preceding cell. You can also just delete the entire line that contains the %.

## Navigating and Evaluating with Cells

While you develop an M-file, you can use these Editor cell features:

- “Navigating Among Cells in an M-file” on page 6-69
- “Evaluating Cells in an M-file” on page 6-69
- “Modifying Values in a Cell” on page 6-70
- “Example—Evaluate Cells” on page 6-71

### Navigating Among Cells in an M-file

To move to the next cell, select **Cell -> Next Cell**. To move to the previous cell, select **Cell -> Previous Cell**. To move to a specific cell, click the cell titles button  and from it, select the cell title you want to move to. Cells without titles are not listed.

### Evaluating Cells in an M-file


To evaluate the code in a cell, use the **Cell** menu evaluation items or buttons in the cell toolbar. When you evaluate a cell, the results display in the Command Window, Figure window, or otherwise, depending on the code evaluated.


The cell evaluation features run the code currently shown in the Editor, even if the file contains unsaved changes. The file does not have to be on the search path. To evaluate a cell, it must contain all the values it requires, or the values must already exist in the MATLAB workspace.


---

**Note** While you can set breakpoints and debug a file containing cells, when you evaluate a file from the **Cell** menu, breakpoints are ignored. To run the file and stop at breakpoints, use **Run/Continue** in the **Debug** menu.

---

**Evaluate Current Cell.** Select **Cell -> Evaluate Current Cell** or click the evaluate cell button  to run the code in the current cell.

**Evaluate and Advance.** Select **Cell -> Evaluate Current Cell and Advance** or click the evaluate and advance button  to run the code in the current cell and move to the next cell.

**Evaluate File.** Select **Cell -> Evaluate Entire File** or click the evaluate file button  to run all of the code in the file.

---


**Note** A beep means there is an error. See the Command Window for the error message.

---

### Modifying Values in a Cell

You can use cell features to modify numbers in a cell, which also automatically reevaluates the cell.

To modify a number in a cell, select the number (or place the cursor near it) and use the value modification tool in the cell toolbar. Using this tool, you can specify a number and press the appropriate math operator to add (increment), subtract (decrement), multiply, or divide the number. The cell then automatically reevaluates.

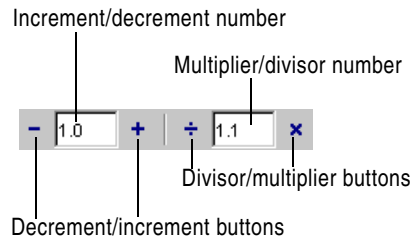

You can use the numeric keypad operators instead of the operator buttons on the toolbar.

---

**Note** MATLAB does not automatically save changes you make to values using the cell toolbar. To save changes, select **File -> Save**.


---


### Example—Evaluate Cells

In this example, modify the values for  $x$  in `sine_wave.m`.

- 1 Run the first cell in `sine_wav.m`. Click somewhere in the first cell, that is, between lines 1 and 6. Select **Cell -> Evaluate Current Cell**. The following figure appears.

Plot generated by  
running  
`sine_wave.m`.

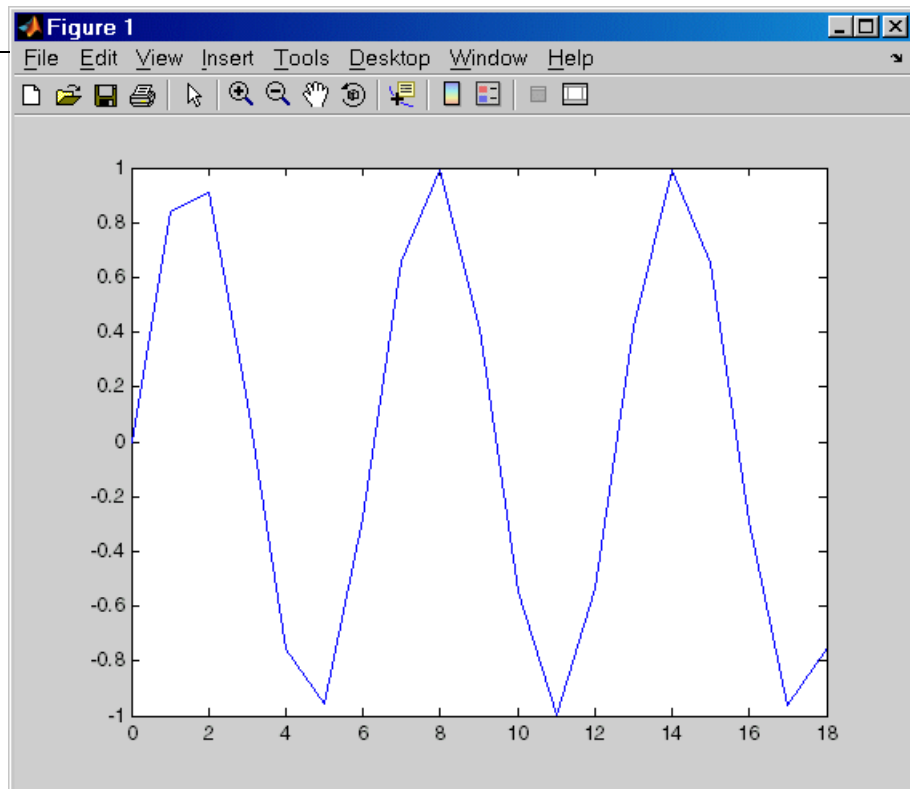

- 2 Assume you want more values for  $x$ , to produce a smoother curve. Position the cursor in line 4, next to the 1. In the cell toolbar, change the 1.1 default multiplier/divisor value to 2. Click the divisor button .

Line 4 becomes

```
4 - x = 0:0.5:6*pi;
```

and the length of  $x$  doubles. The plot automatically updates. The curve still has some rough edges.

- 3 To add more values for  $x$ , click the divisor button three more times. Line 4 becomes

```
4 - x = 0:0.0625:6*pi;
```


The curve is smooth, but because there are more values, processing time is slower. It would be better to find a smaller  $x$  that still produces a smooth curve.

- 4 In the cell toolbar, click the multiplier button once. The increment for  $x$  as shown in line 4 changes from 0.0625 to 0.125.

The resulting curve is still smooth.

- 5 Save these changes. Select **File -> Save**.
- 6 You do not need to evaluate the entire file to modify the plot properties. Instead, evaluate the second cell, that is, lines 7 through 12. You can use the shortcut **Ctrl+Enter** to evaluate the current cell. (The shortcut appears with the menu item, **Cell -> Evaluate Current Cell**).

MATLAB updates the figure.

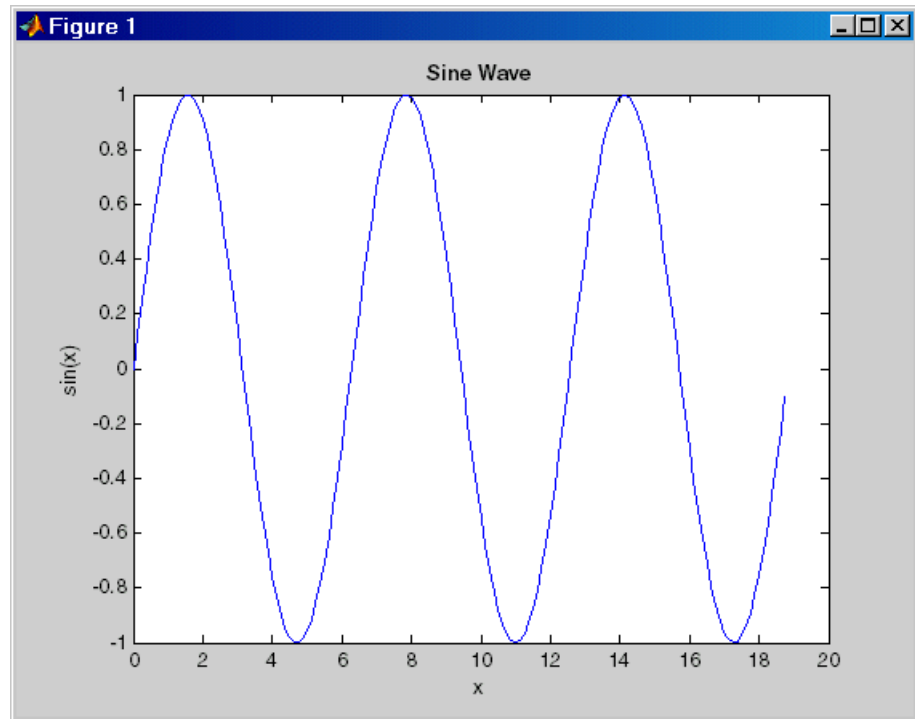

## Using Cells in Function M-Files

You can define and evaluate cells in function M-files as long as the variables referred to in the cell are in your workspace. For example, this can be useful during debugging. If execution is stopped at a breakpoint, you can define cells and execute them without saving the file. If you are not debugging, add the necessary variables to the base workspace and then execute the cells. Cell publishing is not supported for function M-files.





# Tuning and Managing M-Files


---

This set of tools provides useful information about the M-files in a directory that can help you refine the files and improve performance. The tools can help you polish M-files before providing them to others to use. If you are using the Help browser, watch the Directory Reports video demo for an overview of the major functionality.


Visual Directory in Current Directory Browser (p. 7-2)	An alternate view of the current directory, it is useful for managing groups of M-files.
Directory Reports in Current Directory Browser (p. 7-11)	HTML reports about files in the current directory: TODO/FIXME, Help, Contents, Dependency, File Comparison, Coverage (for Profiling), and M-Lint Code Check.
M-Lint Code Check Report (p. 7-25)	Report that identifies potential errors, problems, and opportunities for improvement in your code.
Profiling for Improving Performance (p. 7-35)	Report that identifies where an M-file spends the most time, indicating where to focus when looking for performance improvements.

## Visual Directory in Current Directory Browser


The MATLAB Current Directory browser displays directories and their files, and allows you to make changes to them. To display the Current Directory browser, select **Desktop -> Current Directory**. For more information, see “Current Directory Browser” on page 5-30.

The Visual Directory is an alternate view in the Current Directory browser. To access the Visual Directory, click the show visual directory button  on the Current Directory browser toolbar. Click the button again to return to the classic view of the Current Directory browser.

Click to view Visual Directory.

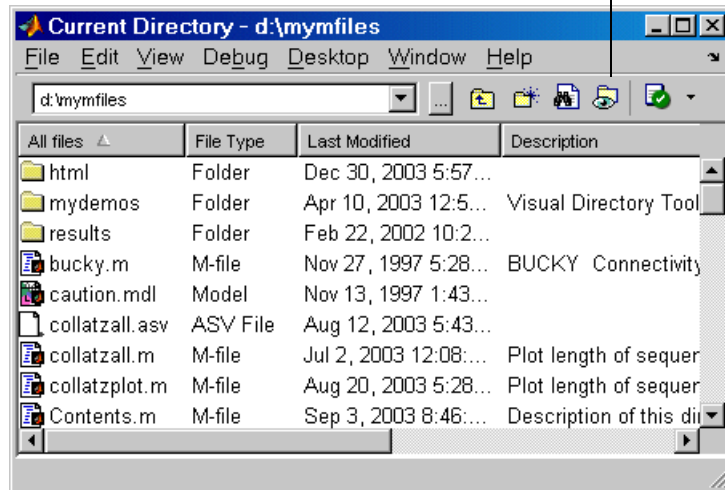

Visual Directory view of current directory.

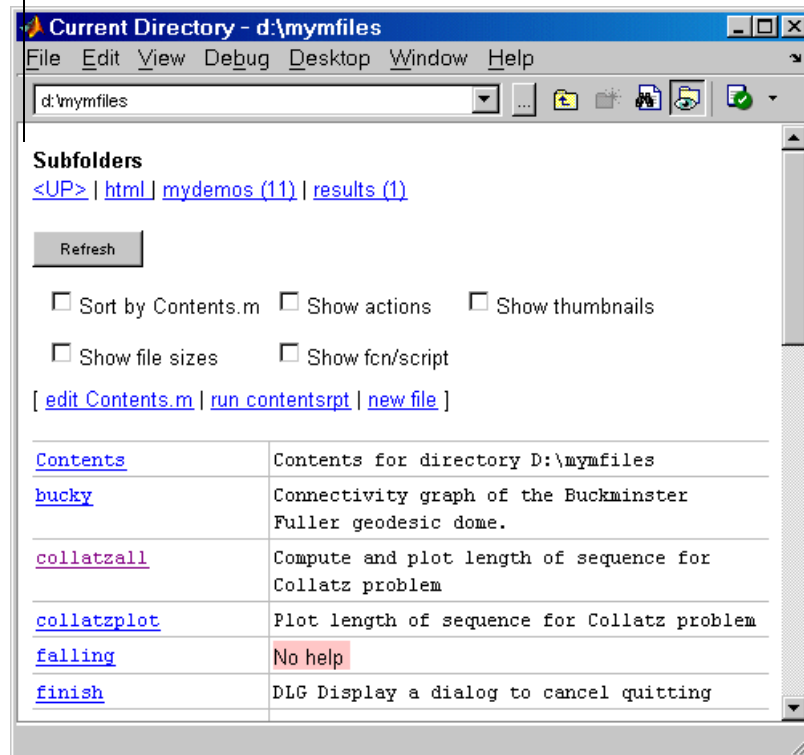


These are the actions you can take using the Visual Directory tool:


- “Navigate Directory Hierarchy” on page 7-4
- “View and Edit Files” on page 7-5
- “Sort by Contents.m” on page 7-6
- “Run, Make Thumbnail, Delete File (Show Actions)” on page 7-7
- “Show File Sizes” on page 7-9
- “Show Function/Script” on page 7-9

## Navigate Directory Hierarchy

The subdirectories of the current directory are listed under **Subfolders**, with the number of M-files they contain listed in parentheses. Click a subdirectory to make it the current directory and display its contents.

The mydemos subdirectory contains 11 M-files. Click mydemos to make it the current directory and display its contents.

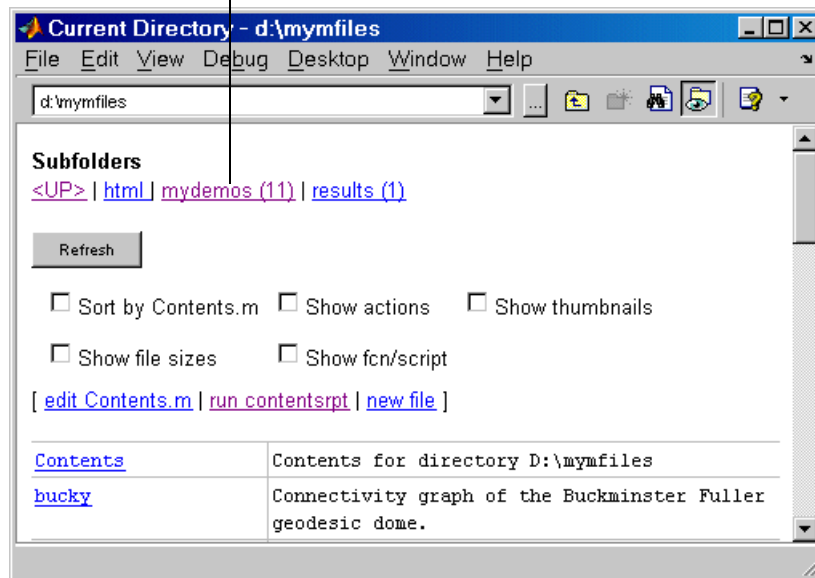

Click the **<UP>** link or the up icon  in the toolbar to make the parent directory become the current directory and to display its contents.

When you navigate up and down through directories, the Visual Directory displays automatically updates to reflect the currently selected check boxes.


## View and Edit Files

Click a filename to open that file in the Editor where you can view and edit it.

M-files you published to HTML using cells also show an **html** link. Click **html** to view the HTML output. For more information about publishing M-files to HTML, see “Publishing to HTML, XML, LaTeX, Word, and PowerPoint Using Cells” on page 8-2.

Click a filename to open it in the Editor where you can view its contents and make changes.

Click **html** to view the output for an M-file you published to HTML using cells.

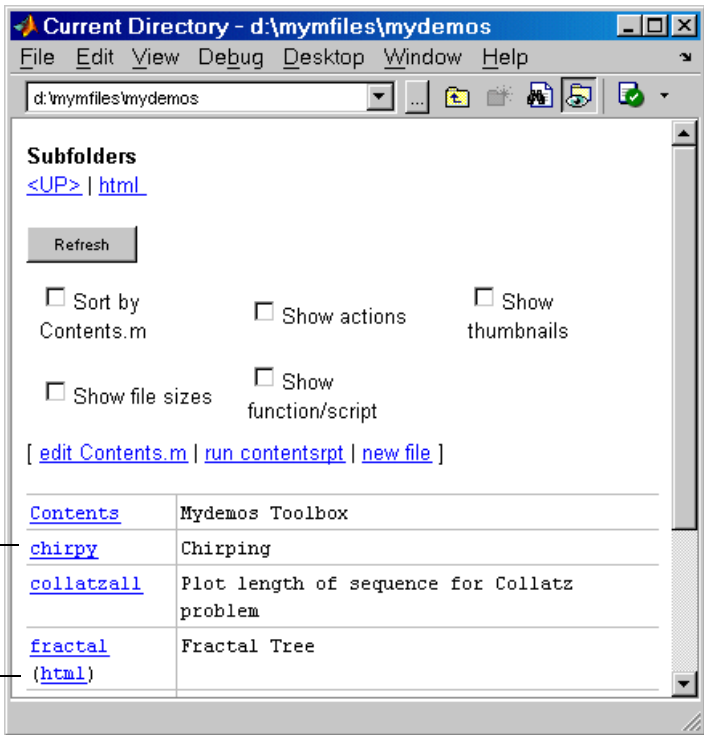


## Sort by Contents.m

By default, M-files in the current directory are listed in alphabetical order. To instead list them as they are ordered in the Contents.m file for the directory, select the **Sort by Contents.m** check box and click **Refresh**. A Contents.m file is a file you create that contains the filename and a brief description for M-files in the directory. When a user types help followed by the directory name, such as help mydemos, MATLAB displays the Contents.m file, effectively providing an overview of the files in the directory. The Contents report is a tool to help you create and maintain Contents.m files. You can create and edit the via the links in the Visual Directory, **edit Contents.m**, and **run contentsrpt**, or via the Directory Reports. For more information about the Contents report and Contents.m file, see the Directory Reports documentation for “Contents Report” on page 7-17.

Select **Sort by Contents.m** and click **Refresh**.


M-files are listed as they are ordered in the Contents.m file for the directory.

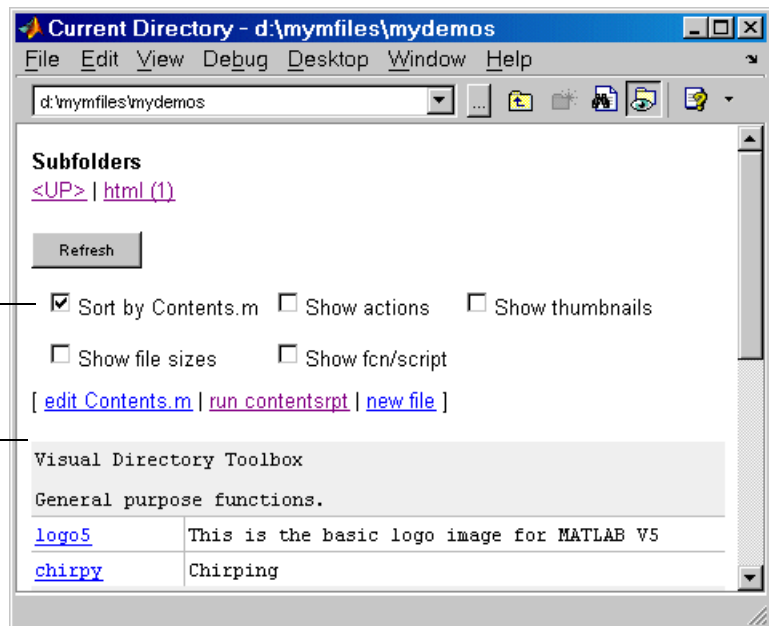

## Run, Make Thumbnail, Delete File (Show Actions)

Select the **Show actions** check box and click **Refresh**. Below the description for each M-file, the Visual Directory lists the actions you can perform on that file.

Click **Show actions**, followed by **Refresh** to view actions you can perform on each M-file. The **make thumbnail** and **delete thumbnail** entries appear only when the **Show thumbnails** check box is also selected.

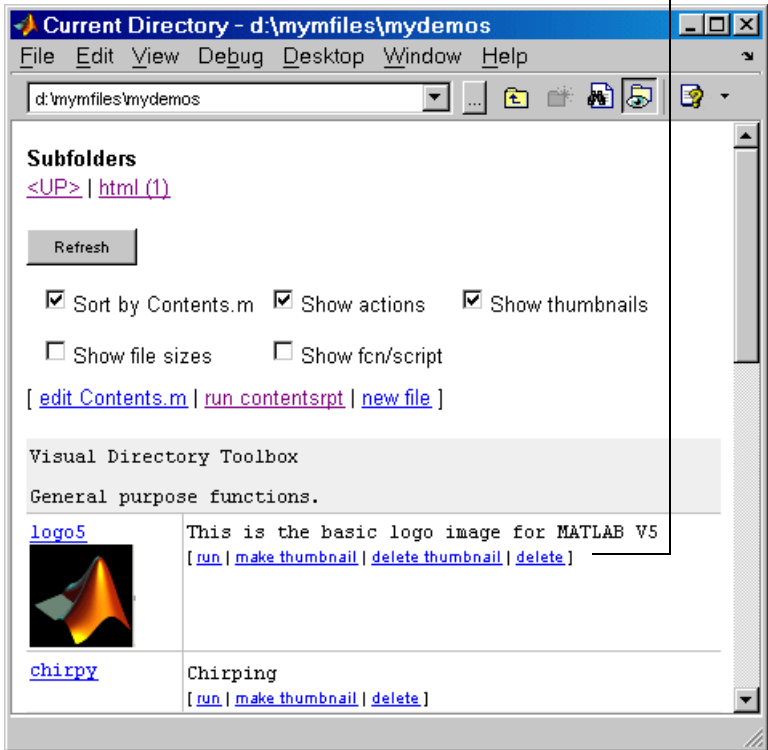

### Run M-File

Click **run** to execute an M-file. Script M-files run, but M-file functions that require an input argument do not run.

### Delete M-File

Click **delete** to remove the file. The file is permanently removed from the directory.

### Make and Delete Thumbnail


When **Show thumbnails** is also selected, the **make thumbnail** and **delete thumbnail** actions appear. A thumbnail is a snapshot of the graphical output the M-file produces. Specifically, the snapshot is the figure returned by `gcf` after the M-file runs. In the example, there is a snapshot shown for `logo5.m`. Thumbnails help you to

- Distinguish between similar M-files, such as different versions of a file you experimented with.
- Find a file when you do not remember the exact name.
- Look at files created by others and quickly identify the ones in which you might be interested, based on the snapshots.

To create a thumbnail for a file, click **make thumbnail**. You cannot make a thumbnail for M-file functions that require an input argument. To delete a thumbnail, click **delete thumbnail**. The thumbnail does not automatically update when you make changes to the file. To update a thumbnail to reflect the latest version of the M-file, click **make thumbnail** again.



Deleted the thumbnail for logo5 and made the thumbnail for chirpy.

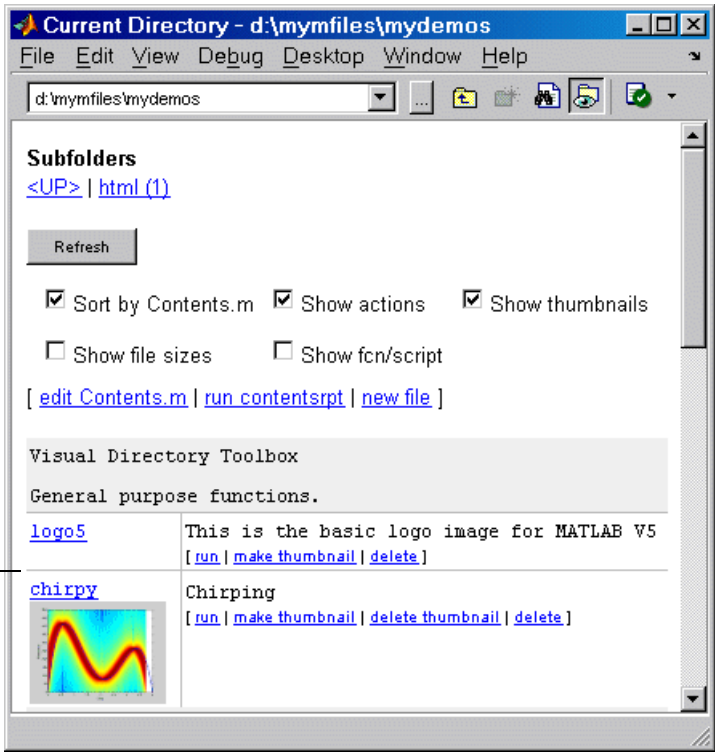


### Show File Sizes

Select the **Show file sizes** check box and click **Refresh**. The actual file size appears, as well as a blue horizontal bar representing the file size that allows you to quickly identify the relative file sizes.

### Show Function/Script

Select the **Show fcn/script** check box and click **Refresh**. Each M-file is labeled and color coded as a script or function, with scripts highlighted in yellow and functions highlighted in blue. For descriptions of these types of M-files, see the reference pages for script and function.

Color coded labeling lets you quickly identify M-files as scripts or functions.

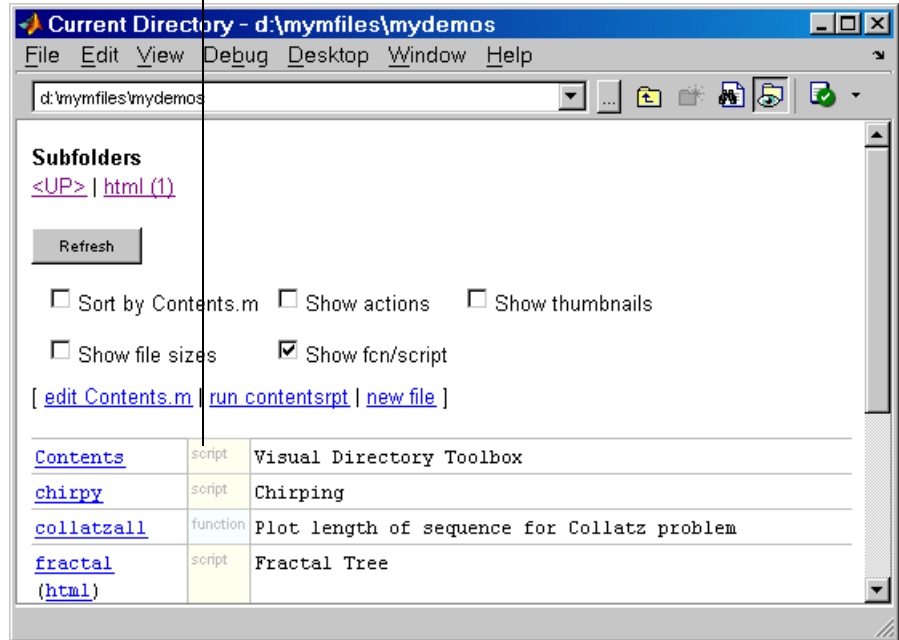

## Directory Reports in Current Directory Browser


- “Accessing and Using Directory Reports” on page 7-11
- “M-Lint Code Check Report” on page 7-25
- “TODO/FIXME Report” on page 7-12
- “Help Report” on page 7-13
- “Contents Report” on page 7-17
- “Dependency Report” on page 7-20
- “File Comparison Report” on page 7-22
- “Coverage Report” on page 7-24

### Accessing and Using Directory Reports



Directory reports help you refine the M-files in a directory and improve their performance. They are also useful for when you prepare files for use by others, such as for a finished project, to share on MATLAB Central, or for a toolbox to be distributed.

Access directory reports from the MATLAB Current Directory browser. To display the Current Directory browser, select **Desktop -> Current Directory**. For more information, see “Current Directory Browser” on page 5-30.

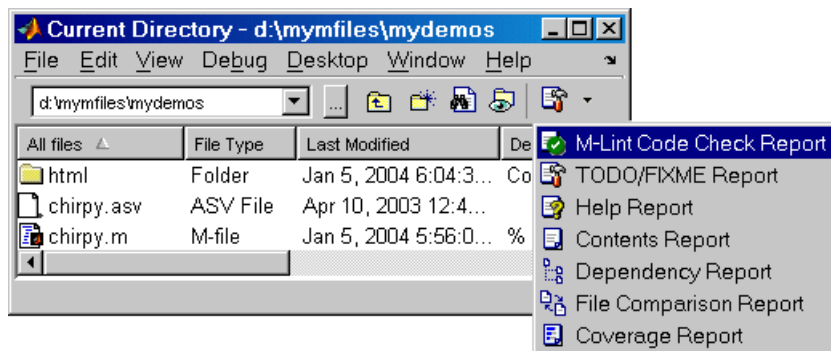Navigate to the directory whose M-files you want to produce reports about. Then, in the Current Directory browser toolbar, click the down arrow button and select the type of report you want to run for all the M-files in the current directory.



The report you selected appears as an HTML document in the MATLAB Web browser.

- In a report, click a filename to open that file in the Editor, where you can view it or make changes to it. Click a line number to open the file at that line.
- To update a report after making changes to the report options or files, or after changing the current directory, click **Refresh** at the top of the report.
- When you run a report, it replaces the report currently displayed. Use the back  and forward  buttons in the toolbar to see a previously run report and then return to the most recent.

You cannot run directory reports when the path is a UNC (Universal Naming Convention) pathname, that is, starts with `\\`. Instead, use an actual hard drive on your system, or a mapped network drive.

### **TODO/FIXME Report**


The TODO/FIXME report shows M-files that contain text strings you included as notes to yourself, such as TODO. Use this report to easily identify M-files that still require work or some other actions.

In the report, select one or more check boxes to display lines containing the specified strings (TODO and FIXME), and click **Refresh**. You can also select the check box for the text field and enter any text string in the field, such as NOTE or TBD to identify lines containing that string.

The TODO/FIXME report identifies lines containing specified text strings, such as TODO, and NOTE shown here, so you can easily see reminders you included.

Enter any text string in this field.

Click the line number to open the file at that line in the Editor, where you can make changes.

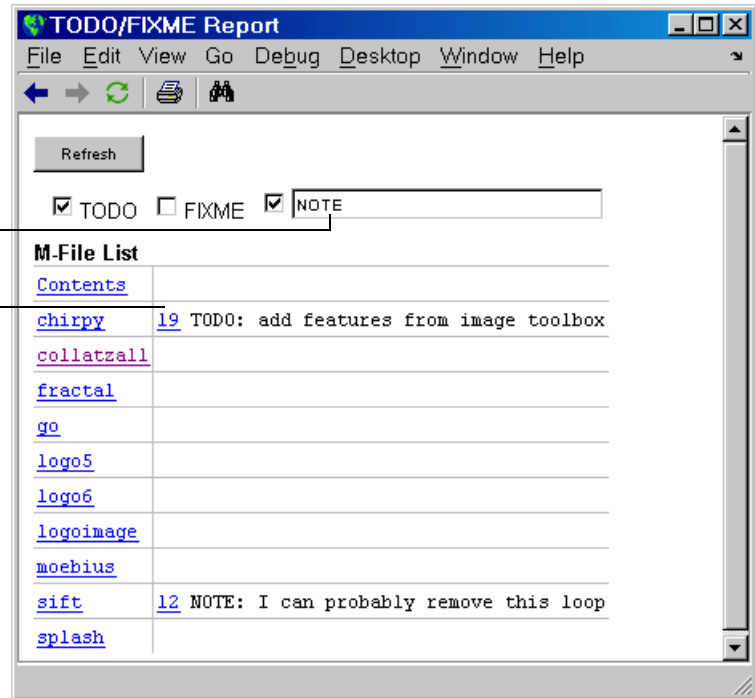

## Help Report

The Help report presents a summary view of the help component of your M-files. In MATLAB, the M-file help component is all contiguous nonexecutable lines (comment lines and blank lines), starting with the second line of a function M-file or the first line of a script M-file. For more information about creating help for your own M-files, see the reference page for the `help` function.

Select one or more check boxes to display the specified help information and click **Refresh**.

Use this information to help you identify files of interest or files that lack help information. It is a good practice to provide help for your files not only to help you recall their purpose, but to help others who might use the files.

Help Report

File Edit View Go Debug Desktop Window Help

Refresh

Show subfunctions  Description  Examples  
 Show all help  See also  Copyright

Help for directory [d:\myfiles\mydemos](#)

**M-File List**

<a href="#">chirpy</a>	Chirping Chirping Use a polynomial-defined curve to signal. Make the chirping sound No example No see-also line No copyright line
<a href="#">collatzall</a>	Plot length of sequence for Collatz Plot length of sequence for Collatz Prepare figure No example No see-also line No copyright line
<a href="#">collatzall/collatz</a>	Collatz problem. Generate a sequence Collatz problem. Generate a sequence For any positive integer, n:

Select **Description** to show the first help line.

Select **Show all help** to see the rest of the help.

Select **Show subfunctions** to see help information for subfunctions.

### Show Subfunctions

With **Show subfunctions** selected, the Help report displays help information for all subfunctions called by each function. Help information for subfunctions is highlighted in gray.

### Description

With **Description** selected, the Help report displays the first line of help in the M-file. If the first comment line is empty, or if there is not a comment before the executable code, **No description line**, highlighted in pink, appears instead.

### Examples

With **Examples** selected, the Help report displays the line number where the examples section of the M-file help begins. The Help report looks for a line in the M-file help that begins with the string `example` or `Example` and displays any subsequent non-blank comment lines. Check this option to easily locate and go to examples in your M-files.

It is a good practice to include examples in the help for your M-files. If you do not have examples in the help for all your M-files, use this option to identify those without examples. If the report does not find examples in the M-file help, **No example**, highlighted in pink, appears.

### Show All Help

With **Show all help** selected, the Help report displays all the M-file help, which is all contiguous nonexecutable lines (comment lines and blank lines), starting with the second line of a function M-file, or the first line of a script M-file. The M-file help shown also includes overloaded functions and methods, which are not actually part of the M-file help comments, but are automatically generated when `help` runs.

If the comment lines before the executable code are empty, or if there are no comments before the executable code, **No help**, highlighted in pink, appears instead.

### See Also

With **See Also** selected, the Help report displays the line number for the See-also line in the M-file help. The See-also line in M-file help lists related functions. When MATLAB displays the help for an M-file, any function name listed on the See-also line appears as a link you can click to display its help. It is a good practice to include a See-also line in the help for your M-files.

The report looks for a line in the M-file help that begins with the string See also. If the report does not find a See-also line in the M-file help, **No see-also line**, highlighted in pink, appears. This helps you identify those M-files without a See-also line, should you want to include one in each M-file.

The report also indicates when a See-also M-file is not in a directory on the search path. You might want to move that file to a directory that is on the search path. If not, you will not be able to click the link to get help for the file, unless you then add its directory to the path or make its directory become the current directory.

### Copyright

With **Copyright** selected, the Help report displays the line number for the copyright line in the M-file. The report looks for a comment line in the M-file that begins with the string Copyright and is followed by year1 - year2 (with no spaces between the years and the hyphen that separates them). It also notes if the end of the date range is not the current year.

It is a good practice to include a Copyright line in the help for your M-files, that notes the year you created the file and the current year. For example, for an M-file you created in 2001, include this line

```
% Copyright 2001-2004
```

If the report does not find a Copyright line in the M-file help, **No copyright line**, highlighted in pink, appears. This helps you identify those files without a Copyright line, should you want to include one in each M-file.




## Contents Report

The Contents report displays information about the integrity of the Contents.m file for the directory. A Contents.m file includes the filename and a brief description of each M-file in the directory. When you type `help` followed by the directory name, such as `help mydemos`, MATLAB displays the information in the `mydemos/Contents.m` file. For more information, see “Providing Help for Your Program” in MATLAB Programming documentation.

If there is no Contents.m file for the directory and you run the Contents report, the report tells you the Contents.m file does not exist and asks if you want to create one. Click **yes** to automatically create the Contents.m file. Edit the Contents.m file in the Editor to include the names of files you plan to create, or to remove “internal” or “helper” files that you do not want to expose when displaying help for the directory.

You need to update the Contents.m file to reflect changes you make to files in the directory. For example, when you remove a file from a directory, remove its entry from the Contents.m file. The Contents report helps you to maintain the Contents.m file. It displays discrepancies between the Contents.m file and the M-files in the directory.

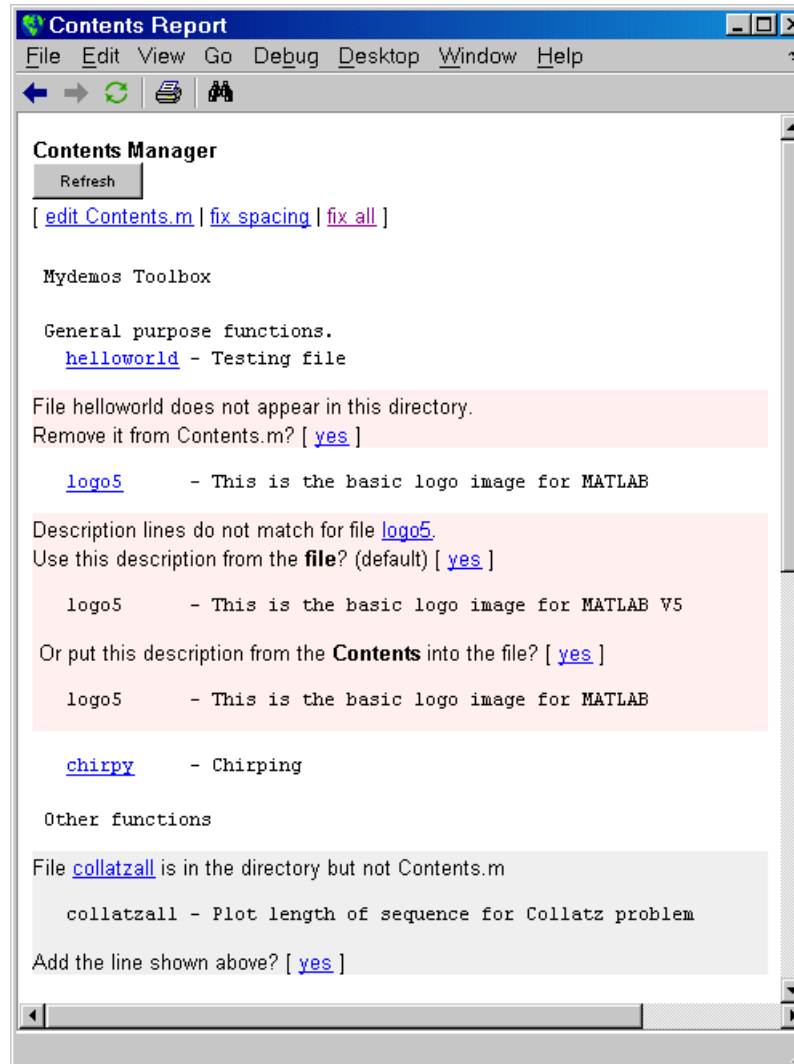

Use the links displayed for each line, or edit the `Contents.m` file directly, or edit the M-files to make the changes. To make all of the suggested changes at once, click **fix all**. To automatically align the filenames and descriptions in the `Contents.m` file, click **fix spacing**.

If you always want the `Contents.m` file to reflect all files in the directory, it you can automatically generate a new `Contents.m` file rather than changing the file based on the Contents report. To do this, first delete the existing `Contents.m` file, run the Contents report, and click yes when prompted for MATLAB to automatically create one.

## Messages in the Contents File Report

**No Contents File.** This message appears if there is no `Contents.m` file in the directory. Click **yes** to automatically create a `Contents.m` file, which contains the filenames and descriptions for all M-files in the directory.

```
No Contents.m file. Make one? [ yes ]
```

**File Not Found.** This message appears when a file included in `Contents.m` is not in the directory. These messages are highlighted in pink. For example, a message such as

```
File helloworld does not appear in this directory.  
Remove it from Contents.m? [ yes ]
```

means the `Contents.m` file includes an entry for `helloworld`, but that file is not in the directory. This might be because you removed the file `helloworld`, or you manually added it to `Contents.m` because you planned to create the file but have not as yet, or you renamed `helloworld`.

**Description Lines Do Not Match.** This message appears when the description line in the M-file help does not match the description provided for the M-file in `Contents.m`. These messages are highlighted in pink. Click **yes (default)** to replace the description in the `Contents.m` file with the description from the M-file. Or select the option to replace the description line in the M-file help using the description for that file in `Contents.m`.

```
Description lines do not match for file logo5.  
Use this description from the file? (default) [ yes ]  
logo5 - This is the basic logo image for MATLAB V5  
Or put this description from the Contents into the file? [ yes ]  
logo5 - This is the basic logo image for MATLAB
```

**Files Not In Contents.m.** This message appears when a file in the directory is not in Contents.m. These messages are highlighted in gray. Click **yes** to add the filename and its description line from the M-file help to the Contents.m file.


```
collatzall is in the directory but not Contents.m
  collatzall - Plot length of sequence for Collatz problem
Add the line shown above? [ yes ]
```

### Dependency Report

The Dependency report shows dependencies among M-files in a directory. This helps you determine all the M-files you need to provide when you tell someone to run a particular M-file. If you do not provide all the dependent M-files along with the M-file you want them to run, they will not be able run the file. The report does not list as dependencies the M-files in the toolbox/matlab directory because every MATLAB user already has those files. Select **Show child functions** to see a list of all M-files (children) called by each M-file in the directory (parent). The report also indicates where each child function resides, for example, in a specified toolbox. If a child function's location is listed as unknown, it could be because the child function is not on the search path or in the current directory.

The file chirpy.m calls two M-files in the Signal Processing toolbox and one in the Image Processing toolbox.

The file go.m calls moebius.m, located in the current directory.

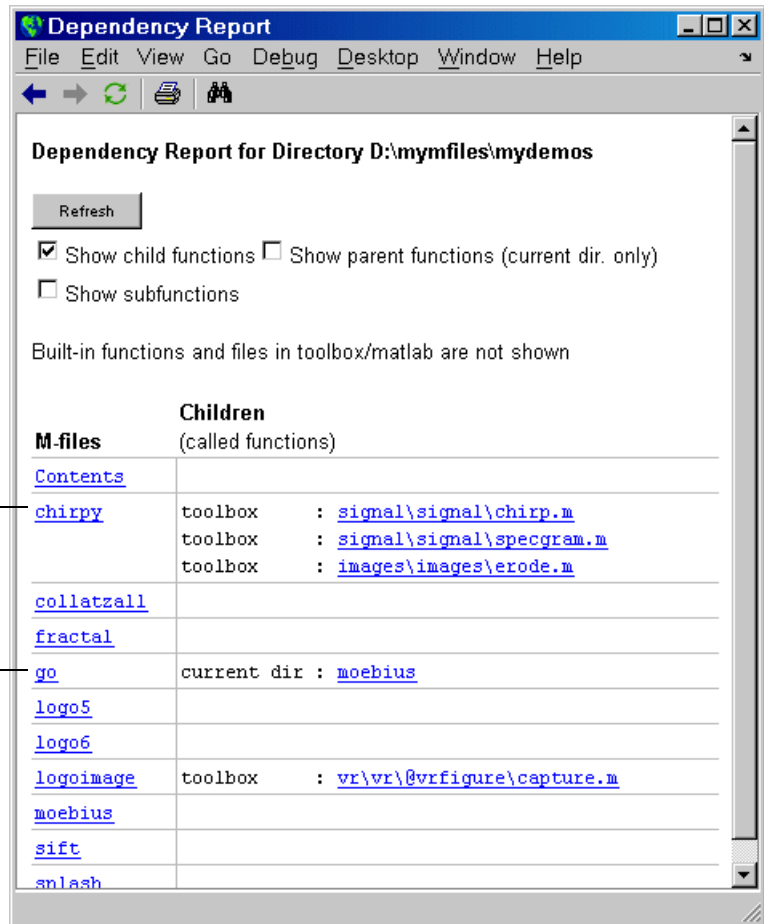

The Dependency report is similar to running the depfun function, although the two do not provide the exact same results. For performance purposes, the Dependency report limits the functions considered.

Select **Show parent functions** to list the M-files that call each M-file. The report limits the parent (calling) functions to those in the current directory. Select **Show subfunctions** to include subfunctions in the report. Subfunctions are listed directly after the main function and are highlighted in gray.

## File Comparison Report

The File Comparison report identifies the differences between two files in the current directory. Some other tools refer to this as a diff report. As an example, you can use this to easily compare an autosaved version of a file to the latest version.

In the File Comparison report listing for a directory, click `file 1` for the first file. Then click `file2` for the file you want to compare the first file to.

To compare  
lengthofline to  
lengthofline2, first  
click file 1 for  
lengthofline. Then  
click file 2 for  
lengthofline2.



The File Comparison report then displays the files next to each other and highlights lines that do not match. Pink highlighting and an x at the start of the line indicates that the content of the lines differs. Green highlighting and a > at the start of the line indicates a line that exists in one file but not the other.

Excerpt of File Comparison report.

Pink highlighting or an x at the start of a line denotes the lines differ.

Green highlighting or a > at the start of a line denotes the line exists in one file but not the other.

```

18 %      hl = plot(1:10,rand(10,5));      . %      hl = plot(1:10,rand(10,5));      18
19 %      [len,dim] = lengthofline([hl h2] . %      [len,dim] = lengthofline([hl h2] 19
20 . . . . . 20
21 % Find input indices that are not line o . % Find input indices that are not line o 21
22 nothandle = ~ishandle(hline);          . nothandle = ~ishandle(hline);          22
- . . . . . 23
23 for nh = 1:prod(size(hline))            x for nh = 1: numel(hline)                24
24     notline(nh) = ~ishandle(hline(nh)) | x     notline(nh) = nothandle(nh) || ~strc    25
25 end . end                                26
26 . . . . . 27
27 len = zeros(size(hline));              . len = zeros(size(hline));              28
- . . . . . 29
28 for nl = 1:prod(size(hline))            x for nl = 1: numel(hline)                30
29     % If it's a line, get the data and c .     % If it's a line, get the data and c    31
30     if ~notline(nl)                      .     if ~notline(nl)                      32
31         flds = get(hline(nl));          .         flds = get(hline(nl));          33

```


## Coverage Report

Run the Coverage report after you run the Profiler to identify how much of a file ran when it was profiled. For example, when you have an `if` statement in your code, that section might not run during profiling, depending on conditions.

You can run the coverage report from the Profiler, or follow these steps:

- 1 In the MATLAB desktop, select **Desktop -> Profiler**. Profile an M-file in the Profiler. For detailed instructions, see “Profiling for Improving Performance” on page 7-35.
- 2 In the Current Directory browser, select Coverage Report. The Coverage Report appears, providing a summary of coverage for the M-file you profiled.

The Coverage Report shows the percentage of the file `windir.m` that ran when it was profiled.

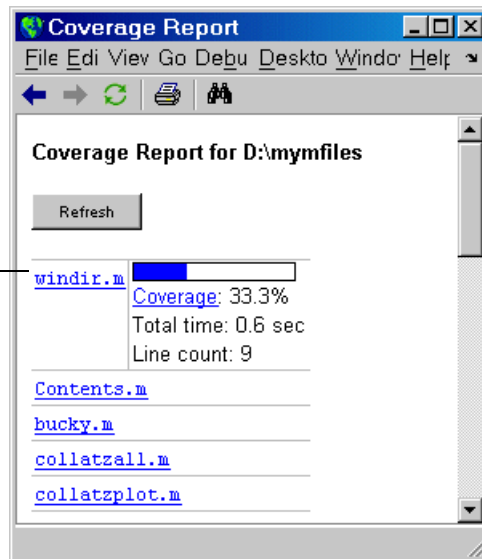

- 3 Click the **Coverage** link to see the profile detail report for the file.



## M-Lint Code Check Report

The M-Lint Code Check report displays potential errors and problems, as well as opportunities for improvement in your code. The term “lint” is the name given to similar tools used with other programming languages such as C. In MATLAB, the M-Lint tool displays a message for each line of an M-file it determines might be improved. For example, a common M-Lint message is that a variable is defined but never used in the M-file.

- “Accessing M-Lint” on page 7-25
- “M-Lint Graphical User Interface (GUI)” on page 7-25
- “Making Changes Based on M-Lint Messages” on page 7-28

### Accessing M-Lint

You can get M-Lint messages using

- The `mlint` function. See the `mlint` reference page for instructions.
- A graphical user interface (GUI) for M-Lint in the Current Directory browser Directory Reports, as described in the remainder of this section. You can also access this GUI from the Editor or Profiler.


### M-Lint Graphical User Interface (GUI)

- 1 Create, run, and debug an M-file, or multiple M-files in a directory.
- 2 In the Current Directory browser, navigate to the directory that contains the M-files you want to check with M-Lint. In the toolbar, select the M-Lint Code Check Report from the Directory Reports listing. For the example shown, go to `$matlabroot/matlab/help/techdoc/matlab_env/examples` to use M-Lint to check `lengthoffline.m`.

The M-Lint report displays in the MATLAB Web browser, showing those M-files that M-Lint identified as having potential problems or opportunities for improvement.

Line number and message describing potential problem or improvement opportunity.

Click line number to open the M-file in the Editor at that line.

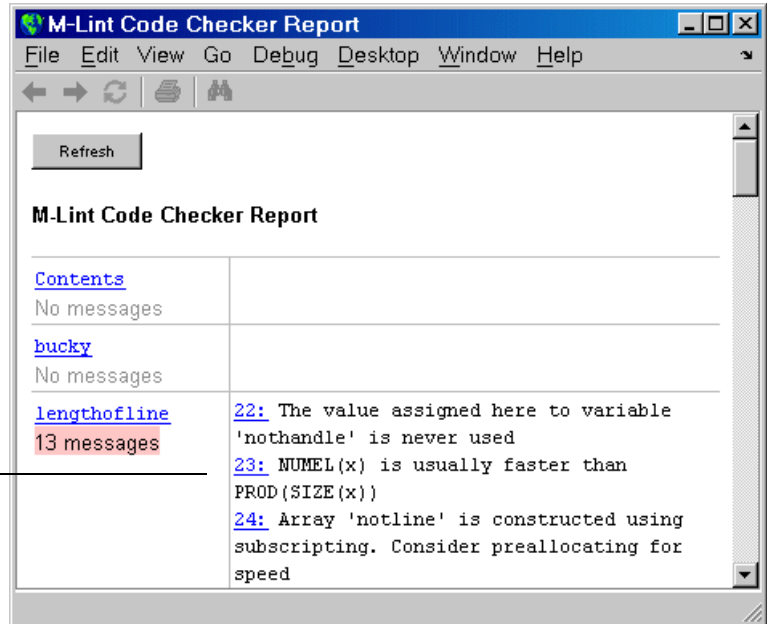

- 3** For each message, review the message and code and make changes to the code based on the message as described here:
  - Click the line number to open the M-file in the Editor at that line.
  - Review the M-Lint message in the report and change the code in the M-file, based on the message.
  - Note that in some cases, you should not make any changes based on the M-Lint messages because the M-Lint messages do not apply to that specific situation. M-Lint does not provide perfect information about every situation. In the event you do not want to change the code but you also do not want to see the M-Lint message for that line in the M-Lint report, suppress the message by adding  `%#ok` to the end of the statement in the M-file.
  - Save the M-file. Consider saving the file to a different name if you made significant changes that might introduce errors. Then you can refer to the original file as you resolve problems with the updated file. Use the File Comparison Report, a tool that can help you identify the changes you made in the updated file. For more information, see “File Comparison Report” on page 7-22.
  - If you are not sure what a message means or what to change in the code as a result, use the Help browser to look for related topics in the online documentation. For examples of messages and what to do about them, see “Making Changes Based on M-Lint Messages” on page 7-28.
- 4** Run and debug the file(s) again to be sure you have not introduced any inadvertent errors.
- 5** If the M-Lint report is already displayed, click the **Refresh** button to update it, or run the M-Lint report again. Ensure the M-Lint messages are gone, based on the changes you made to the M-files.

### Making Changes Based on M-Lint Messages

For information on how to correct the potential problems presented by M-Lint, use the following resources:

- Review the MATLAB Programming and Programming Tips documentation.
- Use the Help browser Index and Search features to look in the documentation for terms presented in the M-Lint messages.

Other techniques to help you identify problems in and improve your M-files include:

- Syntax highlighting features in the Command Window and Editor
- Error messages generated when you run the M-file
- Debugging tools, namely the Editor/Debugger and debugging functions
- Profiler for improving performance

### Example Using M-Lint Messages to Improve Code

An example file, `lengthofline.m`, is included with MATLAB in `$matlabroot/matlab/help/techdoc/matlab_env/examples`.

To run the M-Lint Code Check report for `lengthofline.m`, use the Current Directory browser to navigate to the `$matlabroot/matlab/help/techdoc/matlab_env/examples` directory. Select the **M-Lint Code Check** report from the list of reports on the toolbar. Note that `lengthofline.m` is not on the MATLAB path by default. You can run the file or open it in the Editor when `$matlabroot/matlab/help/techdoc/matlab_env/examples` is the current directory.

The M-Lint Code Check report appears, with its list of messages suggesting improvements you can make to `lengthofline.m`.

**M-Lint Code Checker Report**

Refresh

<a href="#">Contents</a>	No messages
<a href="#">bucky</a>	No messages
<a href="#">lengthofline</a> 13 messages	<p><a href="#">22:</a> The value assigned here to variable 'nohandle' is never used</p> <p><a href="#">23:</a> NUMEL(x) is usually faster than PROD(SIZE(x))</p> <p><a href="#">24:</a> Array 'notline' is constructed using subscripting. Consider preallocating for speed</p> <p><a href="#">24:</a> Use STRCMP1(str1,str2) instead of using LOWER in a call to STRCMP</p> <p><a href="#">28:</a> NUMEL(x) is usually faster than PROD(SIZE(x))</p> <p><a href="#">34:</a> Array 'data' is constructed using subscripting. Consider preallocating for speed</p> <p><a href="#">34:</a> Use dynamic fieldnames with structures instead of GETFIELD. Type 'doc struct' for more information</p> <p><a href="#">38:</a> Use    instead of   as the OR operator in conditional statements</p> <p><a href="#">39:</a> Use    instead of   as the OR operator in conditional statements</p> <p><a href="#">40:</a> Use    instead of   as the OR operator in conditional statements</p> <p><a href="#">43:</a> Array 'dim' is constructed using subscripting. Consider preallocating for speed</p> <p><a href="#">49:</a> Use of brackets [] is unnecessary. Use parentheses to group, if needed</p> <p><a href="#">56:</a> Format string does not agree with argument count</p>

The following table describes each message and demonstrates a way to change the file, based on the message.

<b>Message – – Code</b>	<b>Explanation and Updated Code</b>
<p>22: The value assigned here to variable 'nothandle' is never used</p> <p>-----</p> <pre>22 nothandle = ~ishandle(hline); 23 for nh = 1:prod(size(hline)) 24 notline(nh) = ~ishandle(hline(nh)) ...</pre>	<p>In line 22, nothandle is assigned a value, but nothandle is not used anywhere after that in the file. The line might be extraneous and you could delete it. But it might be that you actually intended to use the variable, which is the case for the lengthofline example. Update line 24 to use nothandle, which is faster than computing ~ishandle for each iteration of the loop, as shown here.</p> <pre>nothandle = ~ishandle(hline); for nh = 1:numel(hline) notline(nh) = nothandle(nh) ...</pre>
<p>23: NUMEL(x) is usually faster than PROD(SIZE(x))</p> <p>-----</p> <pre>23 for nh = 1:prod(size(hline))</pre>	<p>While prod(size(x)) returns the number of elements in a matrix, the numel function was designed to do just that, and therefore is usually more efficient. Type doc numel to see the numel reference page. Change the line to</p> <pre>for nh = 1:numel(hline)</pre>
<p>24: Array 'notline' is constructed using subscripting. Consider preallocating for speed</p> <p>-----</p> <pre>22 nothandle = ~ishandle(hline); 23 for nh = 1:numel(hline) 24 notline(nh) = ~ishandle(hline(nh)) ...</pre>	<p>When you increase the size of an array within a loop, it is inefficient. Before the loop, preallocate the array to its maximum size to improve performance. For more information, see Preallocating Arrays in the MATLAB Programming documentation. In the example, add a new line to preallocate notline before the loop.</p> <pre>notline = false(size(hline)); for nh = 1:numel(hline) notline(nh) = nothandle(nh) ...</pre>


Message -- Code	Explanation and Updated Code (Continued)
<p>24: Use STRCMP(str1,str2) instead of using LOWER in a call to STRCMP</p> <p>-----</p> <pre>24 notline(nh)=~ishandle(hline(nh))    ~strcmp('line',lower(get(hline(nh), 'type')));</pre>	<p>While</p> <pre>strcmp ('line',lower(get(hline(nh) 'type')))</pre> <p>converts the result of the get function to a lowercase string before doing the comparison, the strcmpi function ignores the case while performing the comparison, with advantages that include more efficiency. Change the line to</p> <pre>notline(nh) = nohandle(nh)    ~strcmpi('line',get(hline(nh), 'type'));</pre>
<p>28: NUMEL(x) is usually faster than PROD(SIZE(x))</p> <p>-----</p> <pre>28 for n1 = 1:prod(size(hline))</pre>	<p>See the same message and explanation reported for line 23. Change the line to</p> <pre>for n1 = 1:numel(hline)</pre>
<p>34: Array 'data' is constructed using subscripting. Consider preallocating for speed</p> <p>-----</p> <pre>33 for nd = 1:length(fdata) 34 data{nd} = getfield(flds,fdata{nd});</pre>	<p>See the same message and explanation reported for line 24. Add this line before the loop</p> <pre>data = cell(size(fdata));</pre>

Message – – Code	Explanation and Updated Code (Continued)
<p>34: Use dynamic fieldnames with structures instead of GETFIELD. Type 'doc struct' for more information</p> <p>-----</p> <pre>34 data{nd} = getfield(flds,fdata{nd});</pre>	<p>You can access a field in a structure as a variable expression that MATLAB evaluates at run-time. This is more efficient than using getfield. For more information, type doc struct to see the reference page for structures, or see Using Dynamic Field Names in the MATLAB Programming documentation. Change the line to</p> <pre>data{nd} = flds.(fdata{nd});</pre>
<p>38: Use    instead of   as the OR operator in conditional statements  39: Use    instead of   as the OR operator in conditional statements  40: Use    instead of   as the OR operator in conditional statements</p> <p>-----</p> <pre>38 if isempty(data{3})   ... 39 (length(unique(data{1}(:)))==1   ... 40 length(unique(data{2}(:)))==1   ... 41 length(unique(data{3}(:)))==1)</pre>	<p>While   (the elementwise logical OR operator) performs the comparison correctly, use the    (short circuit OR operator) for efficiency. For details, see Logical Operators in the MATLAB Programming documentation. Change the lines to</p> <pre>if isempty(data{3})    ... (length(unique(data{1}(:)))==1    ... length(unique(data{2}(:)))==1    ... length(unique(data{3}(:)))==1)</pre>
<p>43: Array 'dim' is constructed using subscripting. Consider preallocating for speed</p> <pre>43 dim(nl) = 2;</pre>	<p>See the same message and explanation reported for line 24. Before the first line of the loop</p> <pre>29 for nl = 1:numel(hline)</pre> <p>add the line</p> <pre>dim = len;</pre>



Message -- Code	Explanation and Updated Code (Continued)
<p>49: Use of brackets [] is unnecessary. Use parentheses to group, if needed</p> <p>-----</p> <pre>49 len(n1) = sum([sqrt(dot(temp',temp'))]);</pre>	<p>For more information about the use of brackets and parentheses, see the Special Characters reference page. In this example, remove the brackets because they are not needed and add unnecessary processing. Change the line to</p> <pre>len(n1) = sum(sqrt(dot(temp',temp')));</pre>
<p>56: Format string does not agree with argument count</p> <p>-----</p> <pre>55 warning ('lengthofline:FillWithNaNs',... 56 '\n%s of non-line objects are being filled with %s.', ... 57 'Lengths','NaNs','Dimensions','NaNs')</pre>	<p>The number of %s in the warning statement is 2, but the number of trailing arguments is 4. Because this format will be used twice, the code is correct as written. M-Lint was not able to recognize that and so issued the message. In this case, you do not want to change the code, but you also do not want to see the M-Lint message. To suppress the M-Lint message, add %#ok to the end of the statement. Change line 57 to</p> <pre>'Lengths','NaNs','Dimensions','NaNs') %#ok</pre>

Updated M-Lint report after changing the file `lengthofline.m` based on M-Lint messages. No messages are reported.

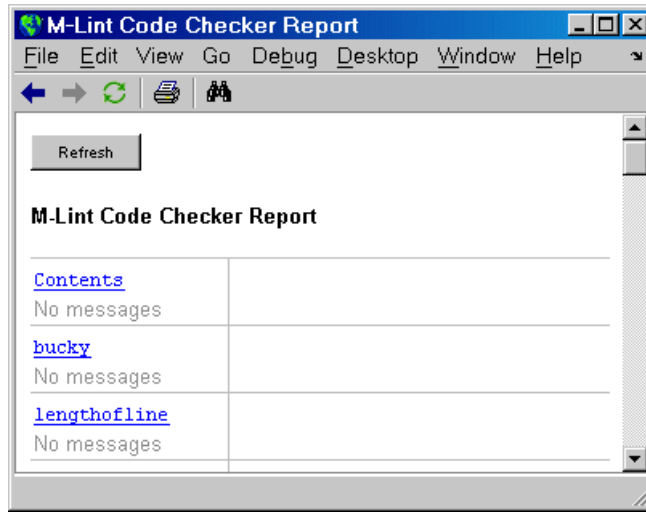

You can view the M-file with all of these changes. Navigate to the `$matlabroot/matlab/help/techdoc/matlab_env/examples` directory and open `lengthofline2.m`.

## Profiling for Improving Performance

One way to improve the performance of your M-files is using profiling tools. MATLAB provides the M-file Profiler, a graphical user interface that is based on the results returned by the `profile` function. Use the Profiler to help you determine where you can modify your code to make performance improvements. This section covers the following topics:

- “What Is Profiling?” on page 7-35—Profiling assesses where time is being spent in your M-code.
- “The Profiling Process: Guidelines” on page 7-36—Provides guidelines on using profiling to optimize performance.
- “The Profiler” on page 7-38—A graphical user interface for viewing where the time is being spent in your M-code.
- “Profile Summary Report” on page 7-42—Describes the summary report produced by the Profiler.
- “Profile Detail Report” on page 7-45—Describes the detail reports produced by the Profiler.
- “The profile Function” on page 7-51—The function on which the Profiler is based, `profile`.

### What Is Profiling?

*Profiling* is a way to measure where a program spends its time. Using the MATLAB Profiler, you can identify which functions in your code consume the most time. You can then determine why you are calling them and look for ways to minimize their use. It is often helpful to decide whether the number of times a particular function is called is reasonable. Because programs often have several layers, your code may not explicitly call the most time-consuming functions. Rather, functions within your code might be calling other time-consuming functions that can be several layers down in the code. In this case it is important to determine which of your functions are responsible for such calls.

Profiling helps to uncover performance problems that you can solve by

- Avoiding unnecessary computation, which can arise from oversight
- Changing your algorithm to avoid costly functions
- Avoiding recomputation by storing results for future use

When you reach the point where most of the time is spent on calls to a small number of built-in functions, you have probably optimized the code as much as you can expect.

### **The Profiling Process: Guidelines**

Here is a general process you can follow to use the Profiler to improve performance in your M-files. This section also describes how you can use profiling as a debugging tool and as a way to understand complex M-files.

---

**Note** Premature optimization can increase code complexity unnecessarily without providing a real gain in performance. Your first implementation should be as simple as possible. Then, if speed is an issue, use profiling to identify bottlenecks.

---

- 1** In the summary report produced by the Profiler, look for functions that used a significant amount of time or were called most frequently. See “Profile Summary Report” on page 7-42 for more information.
- 2** View the detail report produced by the Profiler for those functions and look for the lines that use the most time or are called most often. See “Profile Detail Report” on page 7-45 for more information.

You might want to keep a copy of your first detail report to use as a reference to compare with after you make changes and profile again.

- 3** Determine whether there are changes you can make to the lines most called or the most time-consuming lines to improve performance.

For example, if you have a load statement within a loop, load is called every time the loop is called. You might be able to save time by moving the load statement so it is before the loop and therefore is only called once.

- 4 Click the links to the files and make the changes you identified for potential performance improvement. Save the files and run `clear all`. Run the Profiler again and compare the results to the original report. Note that there are inherent time fluctuations that are not dependent on your code. If you profile the exact same code twice, you can get slightly different results each time.
- 5 Repeat this process to continue improving the performance.

### Using Profiling as a Debugging Tool

The Profiler is a useful tool for isolating problems in your M-files.

For example, if a particular part of the file did not run, you can look at the detail reports to see what lines did run, which might point you to the problem.

You can also view the lines that did not run to help you develop test cases that exercise that code.

If you get an error in the M-file when profiling, the Profiler provides partial results in the reports. You can see what ran and what did not to help you isolate the problem. Similarly, you can do this if you stop the execution using **Ctrl+C**, which might be useful when a file is taking much more time to run than expected.

### Using Profiling for Understanding an M-File

For lengthy M-files that you did not create or that you have not used for awhile and are unfamiliar with, you can use the Profiler to see how the M-file actually worked. Use the Profiler detail reports to see the lines actually called.

If there is an existing GUI tool (or M-file) similar to one that you want to create, start profiling, use the tool, then stop profiling. Look through the Profiler detail reports to see what functions and lines ran. This helps you determine the lines of code in the file that are most like the code you want to create.

### The Profiler

The Profiler is a tool that shows you where an M-file is spending its time. This section covers

- “Opening the Profiler” on page 7-38
- “Running the Profiler” on page 7-39
- “Profiling a Graphical User Interface” on page 7-41
- “Profiling Statements from the Command Window” on page 7-41
- “Changing Fonts for the Profiler” on page 7-42

For information about the reports generated by the Profiler, see “Profile Summary Report” on page 7-42 and “Profile Detail Report” on page 7-45.

### Opening the Profiler


You can use any of the following methods to open the Profiler.

- Select **Desktop-> Profiler** from the MATLAB desktop.
- Select **Tools->Open Profiler** from the menu in the MATLAB Editor.
- Select one or more commands in the Command History window, right-click to view the context menu, and choose the **Profile Code** option.
- Enter the following command in the Command Window:  
`profile viewer`

## Running the Profiler

This is a quick summary. Details follow.

- 1 Type profile viewer to open the Profiler.
- 2 Type statement to run.
- 3 Click **Start Profiling**.

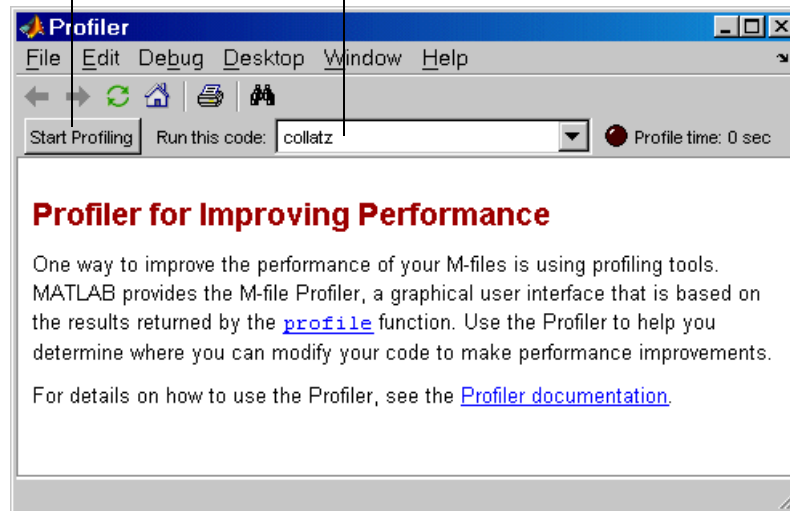

To profile an M-file or a line of code, follow these steps:

- 1 In the **Run this code** field in the Profiler, enter the statement you want to run.


Run this code: `[t,y] = ode23('lotka',[0 2],[20;20])`

You can run this example

```
[t,y] = ode23('lotka',[0 2],[20;20])
```

as the code is provided with MATLAB demos. It runs the Lotka-Volterra predator-prey population model. For more information about this model, type `lotkdemo`, which runs the demonstration.


If you are running a statement you previously profiled in the current MATLAB session, select the statement from the list box and skip to step 3.




- 2 Click **Start Profiling** (or press **Enter** after entering the statement).



While the Profiler is running, the **Profile time** indicator (at the top right of the Profiler window) is green and the number of seconds it reports increases.



When the profiling is finished, the **Profile time** indicator becomes black and shows the length of time the Profiler ran.



This is not the actual time that your statements took to run, but is the time elapsed from when you clicked **Start Profiling** until you clicked **Stop Profiling**. If the time reported is much different from what you expected (for example hundreds of seconds for a simple statement), you might have had profiling on longer than you realized.

- 3 When profiling is complete, the **Profile Summary** report appears in the Profiler window. For more information about this report, see “Profile Summary Report” on page 7-42.



## Profiling a Graphical User Interface

You can run the Profiler for a graphical user interface, such as the Filter Design and Analysis tool included with the Signal Processing Toolbox. You can also run the Profiler for an interface you created, such as one built using GUIDE.

To profile a graphical user interface, do the following.

- 1 In the Profiler, click **Start Profiling**. Make sure that no code appears in the **Run this code** field.
- 2 Start the graphical user interface. (If you do not want to include its startup process in the profile, do not click **Start Profiling**, step 1, until after you have started the graphical interface.)
- 3 Use the graphical interface. When you are finished, click **Stop Profiling** in the **Profiler**.

The **Profile Summary** report appears in the Profiler.

## Profiling Statements from the Command Window

To profile more than one statement, do the following:

- 1 In the Profiler, clear the **Run this code** field and click the **Start Profiling** button.
- 2 In the Command Window, enter and run the statements you want to profile.


The status bar in the desktop reports `Profiler on` when MATLAB is not busy and the Profiler is running.

- 3 After running all the statements, click **Stop Profiling** in the Profiler.

The **Profile Summary** report appears in the Profiler.

### Changing Fonts for the Profiler

To change the fonts used in the Profiler, follow these steps:


- 1 Select **File -> Preferences -> Fonts** to open the **Font Preferences** dialog box.
- 2 In the **Font Preferences** dialog box, select the code or text font that you want to use in the Profiler. For more information, click the **Help** button in the dialog box.
- 3 Click **Apply** or **OK**.
- 4 In the Profiler, click the refresh button  to update the display.

### Profile Summary Report

The **Profile Summary** report presents statistics about the overall execution of the function and provides summary statistics for each function called. The report formats these values in four columns.

- **Function Name**—A list of all the functions and subfunctions called by the profiled function. When first displayed, the functions are listed in order by the amount of time they took to process. To sort the functions alphabetically, click the **Function name** link at the top of the column.
- **Calls**—The number of times the function was called while profiling was on. To sort the report by the number of times functions were called, click the **Calls** link at the top of the column.
- **Total Time**—The total time spent in a function, including all child functions called, in seconds. The time for a function includes time spent on child functions. To sort the functions by the amount of time they consumed, click the **Total Time** link at the top of the column. By default, the summary report displays profiling information sorted by **Total Time**. Note that the Profiler itself uses some time, which is included in the results. Also note that total time can be zero for files whose running time was inconsequential.
- **Self Time** —The total time spent in a function, *not* including time for any child functions called, in seconds. To sort the functions by this time value, click the **Self Time** link at the top of the column.


Following is the summary report for the Lotka-Volterra model described in “Example: Using the profile Command” on page 7-53.

To print a summary report, clicking the print button .

To get more detailed information about a particular function, click its name in the **Function Name** column. See “Profile Detail Report” on page 7-45 for more information.

Click any column label to sort by column.


Click any function name to display detailed report.

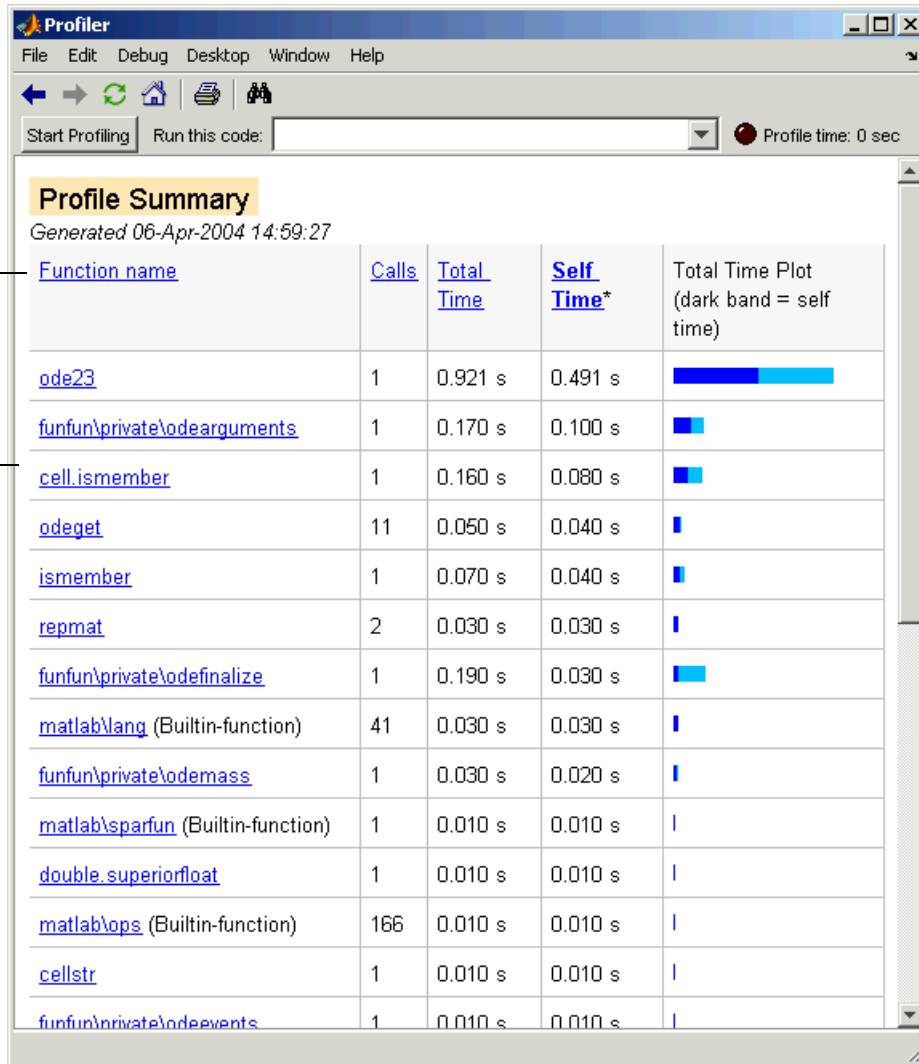

## Profile Detail Report

The **Profile Detail** report shows profiling results for a selected function that was called during profiling. A **Profile Detail** report is made up of seven parts, summarized below. By default, the **Profile Detail** report includes all seven parts, although, depending on the function, not every part contains data. You can customize the display to include only parts you are interested in—see “Controlling the Contents of the Detail Report Display” on page 7-45. The following sections provide more detail about each part.

- “Profile Detail Report Header” on page 7-47 — Provides general information about the function.
- “Parent Files” on page 7-47 — Provides information about the parent function.
- “Busy Lines” on page 7-48 — Lists the lines in the function that used the greatest amount of processing time.
- “Child Files” on page 7-48 — Lists the functions called by this function, with links to Profile Detail reports for these functions.
- “M-Lint Results” on page 7-49 — Lists the lines in the functions that M-lint highlighted.
- “File Coverage” on page 7-50 — Provides statistics about the lines of code in the function that executed while profiling was on.
- “File Listing” on page 7-50 — Includes the source code for the function, if it is an M-file.

To return to the **Profile Summary** report from the **Profile Detail** report, click the home button  in the toolbar.

## Controlling the Contents of the Detail Report Display

You can determine which parts are included in the display by selecting them and then clicking the **Refresh** button. The following sections provide more detail about each part of this report.

Select parts of report to display and click **Refresh**.

**funfun\private\odearguments (1 call, 0.170 sec)**  
 Generated 06-Apr-2004 15:32:17  
 M-function in file [\bat10\Aminightly\matlab\toolbox\matlab\funfun\private\odearguments.m](#)  
[\[Copy to new window for comparing multiple runs\]](#)

Refresh

Show parent files     Show busy lines     Show child files  
 Show M-Lint results     Show file coverage     Show file listing

**Parents** (calling functions)

Filename	File Type	Calls
<a href="#">ode23</a>	M-function	1

**Lines where the most time was spent**

Line Number	Code	Calls	Total Time	% Time	Time Plot
<a href="#">146</a>	rtol = odeget(options,'RelTol'...	1	0.030 s	17.6%	
<a href="#">110</a>	f0 = feval(ode,t0,y0,args(:));...	1	0.020 s	11.8%	
<a href="#">94</a>	end	1	0.020 s	11.8%	
<a href="#">80</a>	if (margin(ode) == 2) ...	1	0.020 s	11.8%	
<a href="#">13</a>	if strcmp(solver,'ode15i')	2	0.020 s	11.8%	
Other lines & overhead			0.060 s	35.3%	
Totals			0.170 s	100%	

## Profile Detail Report Header

The detail report header includes the name of the function that was profiled, the number of times it was called in the parent function, and the amount of time it used.

The header includes a link that opens the function in your default text editor.

The header also includes a link that copies the report to a separate window. Creating a copy of the report can be helpful when you make changes to the file, run the Profiler for the updated file, and compare the Profiler detail reports for the two runs. Do not make changes to M-files provided with MathWorks products, that is, files in \$matlabroot/toolbox directories.

Open file in default editor. —

**funfun\private\odearguments (1 call, 0.140 sec)**

Generated 06-Apr-2004 15:41:04

M-function in file [\bat10\Aminightly\matlab\toolbox\matlab\funfun\private\odearguments.m](#)

[\[Copy to new window for comparing multiple runs\]](#)

Copy this detail report to a new window.

## Parent Files

To include the **Parents** part in the detail report, click the **Show parent files** check box. This part of the report provides information about the parent function, with a link to its detail report.

**Parents** (calling functions)

Click to open parent detail report. —







Filename	File Type	Calls
<a href="#">ode23</a>	M-function	1

### Busy Lines

To include information about the lines of code that used the most amount of processing time in the detail report, click the **Show busy lines** check box. Click a line number to view that line of code in the source listing.

Click on line number to go to line in code.

**Lines where the most time was spent**

Line Number	Code	Calls	Total Time	% Time	Time Plot
<a href="#">146</a>	rtol = odeget(options,'RelTol'...	1	0.040 s	28.6%	
<a href="#">135</a>	dataType = superiorfloat(t0,y0...	1	0.020 s	14.3%	
<a href="#">94</a>	end	1	0.020 s	14.3%	
<a href="#">13</a>	if strcmp(solver,'ode15i')	2	0.020 s	14.3%	
<a href="#">182</a>	htry = abs(odeget(options,'Ini...	1	0.010 s	7.1%	
Other lines & overhead			0.030 s	21.4%	
Totals			0.140 s	100%	




### Child Files

To include the **Children** part of the detail report, click the **Show child files** check box. This part of the report lists all the functions called by the profiled function. If the called function is an M-file, you can view the source code for the function by clicking on its name.



Click to view detail report for file.

**Children** (called functions)

Filename	File Type	Calls	Total Time	% Time	Time Plot
<a href="#">odeget</a>	M-function	5	0.040 s	28.6%	
<a href="#">matlab\lang</a>	Builtin-function	4	0.010 s	7.1%	
<a href="#">matlab\strfun</a>	Builtin-function	6	0 s	0%	
<a href="#">matlab\velmat</a>	Builtin-function	7	0 s	0%	
<a href="#">matlab\datafun</a>	Builtin-function	2	0 s	0%	
<a href="#">matlab\ops</a>	Builtin-function	26	0 s	0%	
<a href="#">matlab\datatypes</a>	Builtin-function	3	0 s	0%	
<a href="#">double.superiorfloat</a>	M-function	1	0 s	0%	
<a href="#">matlab\elfun</a>	Builtin-function	2	0 s	0%	
Self time (built-ins, overhead, etc.)			0.090 s	64.2%	
Totals			0.140 s	100%	

## M-Lint Results

To include the **M-Lint results** part in the detail report display, click the **Show M-Lint results** check box. This part of the report provides information generated by M-Lint about the function.

M-Lint results	
Line number	Message
<a href="#">51</a>	EXIST with two input arguments is faster than with
<a href="#">79</a>	EXIST with two input arguments is faster than with

Click on line number to go to line in code.

## File Coverage

To include the **Coverage results** part in the detail report display, click the **Show file coverage** check box. This part of the report provides statistical information about the number of lines in the code that executed during the profile run.

Coverage results	
[ <a href="#">Show coverage for parent directory</a> ]	
Total lines in file	186
Non-code lines (comments, blank lines)	26
Code lines (lines that can run)	137
Code lines that did run	52
Code lines that did not run	85
Coverage (did run/can run)	37.96 %

Percentage of file that executed during profile run.

## File Listing

To include the **File listing** part in the detail report display, click the **Show file listing** check box. If the file is an M-file, the **Profile Detail** report includes a column listing the execution time for a particular line, a column listing the number of times the line was called, and the source code for the function.

In the file listing, comment lines appear in green, lines of code that executed appear in black, and lines of code that did not execute appear in gray. If you click a function name in the listing, you can view its detail report.

By default, the **Profile Detail** report uses color to highlight the lines of code with the longest execution time. The darker the shade of color, the longer the line of code took to execute. Using the menu in this section of the detail report you can change this default and choose to highlight other lines of code in the listing, such as the lines called the most, lines called out by M-Lint, or lines of code that were (or were not) executed. Using this menu, you can also turn off highlighting completely.

Select category of code to highlight, or turn highlighting off.

**File listing**  
Color highlight code according to

time calls line

time

1 function ... tspan, next, t0, tfinal, tdir, y0, fcn  
2 ... hreshold, rtol, normcontrol, normy, hmax  
3 ...  
4 ode ... HandlesUsed, solver, ode, tspan, y0, opt  
5 %ODEARGUMENTS Helper function that processes arguments for  
6 %  
7 % See also ODE113, ODE15I, ODE15S, ODE23, ODE23S, ODE23T,  
8  
9 % Mike Karr, Jacek Kierzenka  
10 % Copyright 1984-2003 The MathWorks, Inc.  
11 % \$Revision: 1.12.4.4 \$ \$Date: 2004/03/09 16:16:40 \$  
12  
13 if strcmp(solver,'ode15i')  
14 FcnHandlesUsed = true; % no MATLAB v. 5 legacy for ODE15I  
15 end  
16  
17 if FcnHandlesUsed % function handles used  
18 msg = ['When the first argument to ', solver, ' is a functi  
19 if isempty(tspan) || isempty(y0)  
20 error('MATLAB:odearguments:TspanOrY0NotSupplied',...  
21 [msg 'the tspan and y0 arguments must be supplied.  
22 end

Highlighted line.

0.02 2 13

## The profile Function

The Profiler is based on the results returned by the profile function. This section describes

- “profile Function Syntax Summary” on page 7-52
- “Example: Using the profile Command” on page 7-53
- “Accessing Profiler Results” on page 7-54
- “Saving Profile Reports” on page 7-56

### profile Function Syntax Summary

Here is a summary of the main forms of `profile`. For details about these and other options, type `doc profile`. Some people use `profile` simply to see the child functions; see also `depfun` for that purpose.

Syntax	Option	Description
<code>profile on</code>		Starts <code>profile</code> , clearing previously recorded statistics.
	<code>-detail level</code>	Specifies the level of function to be profiled. Level can be either:  ' <code>mmex</code> ' — M-functions, M-subfunctions, and MEX-functions ' <code>builtin</code> ' — M-functions, M-subfunctions, MEX-functions, and built-ins
	<code>-history</code>	Specifies that the exact sequence of function calls is to be recorded.
<code>profile off</code>		Suspends <code>profile</code> .
<code>profile resume</code>		Restarts <code>profile</code> without clearing previously recorded statistics.
<code>profile clear</code>		Clears the statistics recorded by <code>profile</code> .
<code>profile viewer</code>		Opens the Profiler, a graphical user interface and displays the information gathered as an HTML-formatted report.  Note: If you run the obsoleted syntax <code>profile report</code> , the <code>profile</code> function calls this syntax.
<code>s = profile('status')</code>		Displays a structure containing the current <code>profile</code> status.
<code>stats = profile('info')</code>		Suspends <code>profile</code> and displays a structure containing <code>profile</code> results.

### Example: Using the profile Command

This example demonstrates how to run `profile`:

- 1 To start `profile`, type in the Command Window

```
profile on
```

- 2 Execute an M-file. This example runs the Lotka-Volterra predator-prey population model. For more information about this model, type `lotkadem`, which runs a demonstration.

```
[t,y] = ode23('lotka',[0 2],[20;20]);
```

- 3 Generate the profile report and display it in the Profiler window. This suspends `profile`.

```
profile viewer
```

- 4 Restart `profile`, without clearing the existing statistics.

```
profile resume
```

The `profile` function is now ready to continue gathering statistics for any more M-files you run. It will add these new statistics to those generated in the previous steps.

- 5 Stop `profile` when you finish gathering statistics.

```
profile off
```

- 6 To view the profile data, call `profile` specifying the `'info'` argument. The `profile` function returns data in a structure.

```
p = profile('info')
```

```
p =
```

```
FunctionTable: [27x1 struct]
FunctionHistory: [2x766 double]
ClockPrecision: 1.0000e-007
Name: 'MATLAB'
ClockSpeed: 1000
```

- 7** To save the profile report, use the `profsave` command. This command stores the profile information in separate HTML files, for each function listed in the `FunctionTable` field of the structure, `p`.

```
profsave(p)
```

By default, `profsave` puts these HTML files in a subdirectory of the current directory named `profile_results`. You can specify another directory name as an optional second argument to `profsave`.

### Accessing Profiler Results

The `profile` command returns results in a structure. This example illustrates how you can access these results:

- 1** To start profile, specifying the detail and history options, type in the Command Window.

```
profile on -detail builtin -history
```

The `detail` option specifies that built-ins should be included in the profile data. The `history` option specifies that the report include information about the sequence of functions as they are entered and exited during profiling.

- 2** Execute an M-file. This example runs the Lotka-Volterra predator-prey population model. For more information about this model, type `lotkademo`, which runs a demonstration.

```
[t,y] = ode23('lotka',[0 2],[20;20]);
```

- 3** Get the structure containing profile results.

```
stats = profile('info')
```

```
stats =
```

```
FunctionTable: [34x1 struct]
FunctionHistory: [2x968 double]
ClockPrecision: 1.1111e-007
Name: 'MATLAB'
ClockSpeed: 1000
```

- 4** The `FunctionTable` field is an array of structures, where each structure represents an M-function, M-subfunction, MEX-function, or, because the `builtin` option is specified, MATLAB builtin function.

```
stats.FunctionTable

ans =

41x1 struct array with fields:
    FunctionName
    FileName
    Type
    NumCalls
    TotalTime
    TotalRecursiveTime
    Children
    Parents
    ExecutedLines
```

- 5** View one of the structures in the `FunctionTable` field.

```
stats.FunctionTable(3)

ans =

    FunctionName: 'ode23'
    FileName: [1x55 char]
    Type: 'M-function'
    NumCalls: 1
    TotalTime: 0.6810
    TotalRecursiveTime: 0.6810
    Children: [11x1 struct]
    Parents: [0x1 struct]
    ExecutedLines: [132x4 double]
    IsRecursive: 0
    AcceleratorMessages: {1x0 cell}
```

- 6 To view the history data generated by profile, view the `FunctionHistory` field. The history data is a 2-by-n array. The first row contains Boolean values where 1 means entrance into a function and 0 (zero) means exit from a function. The second row identifies the function being entered or exited by its index in the `FunctionTable` field. To see how to create a formatted display of history data, see the example on the profile reference page.

### **Saving Profile Reports**

To save the profile report, use the `profsave` command.

This command stores the profile information in separate HTML files, for each function listed in the `FunctionTable` field of the structure, `p`.

```
profsave(p)
```

By default, `profsave` puts these HTML files in a subdirectory of the current directory named `profile_results`. You can specify another directory name as an optional second argument to `profsave`.

```
profsave(p, 'mydir')
```



# Publishing Results

---

Publishing to HTML, XML, LaTeX, Word, and PowerPoint Using Cells (p. 8-2)

Use cells to publish an M-file scripts to a popular output format, including the code, comments, and results.

Marking Up Text in Cells for Publishing (p. 8-9)

Prepare an M-file for publishing.

Publishing M-Files Using Cells (p. 8-15)

Publish the file and set preferences for publishing.

Notebook for Publishing to Word (p. 8-18)

Create an M-book in Microsoft Word, enter commands, and perform other basic tasks.

Defining MATLAB Commands as Input Cells for Notebook (p. 8-23)

Make text in the M-book become a MATLAB command.

Evaluating MATLAB Commands with Notebook (p. 8-27)

Run the MATLAB commands in the M-book.

Printing and Formatting an M-Book (p. 8-33)

Control styles and print M-books.

Configuring Notebook (p. 8-39)

Set up Notebook for use with your version of Word.

Notebook Feature Reference (p. 8-41)

Alphabetical listing of features.

## Publishing to HTML, XML, LaTeX, Word, and PowerPoint Using Cells

- “Overview of Publishing” on page 8-2
- “Example of Publishing Without Text Markup” on page 8-3
- “Example of Publishing with Text Markup” on page 8-4

### Overview of Publishing

When you have completed writing and debugging an M-file script, use the Editor cell features to quickly publish the M-file and its results in any of several presentation formats: HTML, XML, LaTeX, or, when the applications are installed, Microsoft Word or PowerPoint. This allows you to share your work with others, presenting not only the code, but also commentary on the code and results from running the file.

Publishing features evaluate each cell in the M-file script and display the contents of the cell along with the results in a nicely formatted document. For example, published documents include output to the Command Window and figures, and bold headings for each section of the file. The cells in the Editor you use for publishing are the same ones you might already have used for improving your code as described in “Rapid Code Iteration Using Cells” on page 6-63.

If you are using the Help browser, watch the Publishing M Code from the Editor video demo for an overview of the major functionality.

This is the overall process to publish an M-file using cell features in the Editor:


- 1** Enable cell mode and define cells as described in steps 1 through 3 in “Rapid Code Iteration Using Cells” on page 6-63. For formatted publishing, all comments must appear at the start of a cell, before the code. Comments appearing after code in a cell appear as unformatted comments in code in the output.
- 2** Use **Cell -> Insert Text Markup** to insert markup symbols in the M-file comments to stylize the text for the presentation format, for example, displaying selected text as bold or monospace. For details, see “Marking Up Text in Cells for Publishing” on page 8-9.

- 3 Select **File -> Publish To**, and select the format in which you want to publish the M-file: HTML, XML, LaTeX, Word, or PowerPoint. For details, see “Publishing M-Files Using Cells” on page 8-15.
- 4 Change Editor/Debugger Publishing and Publishing Images preferences to adjust the output. For example, you can choose to include or exclude the code from the output. For details, see “Modifying Published Output Via Preferences” on page 8-17.

MATLAB publishes the M-file by writing the cell titles, comment text, and code to a file using the specified format. MATLAB also evaluates the cells and writes the results of the evaluation to the output file as well. Any figures created during the evaluation are saved as graphics files, and are shown with the results.

## Example of Publishing Without Text Markup

This is based on the M-file used in “Example—Evaluate Cells” on page 6-71, as shown here.

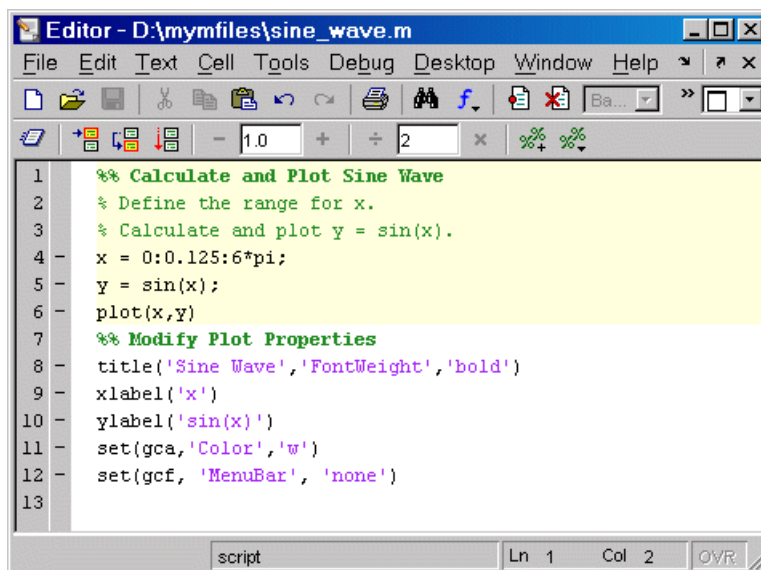

```
1  %% Calculate and Plot Sine Wave
2  % Define the range for x.
3  % Calculate and plot y = sin(x).
4  x = 0:0.125:6*pi;
5  y = sin(x);
6  plot(x,y)
7  %% Modify Plot Properties
8  title('Sine Wave','FontWeight','bold')
9  xlabel('x')
10 ylabel('sin(x)')
11 set(gca,'Color','w')
12 set(gcf, 'MenuBar', 'none')
13
```


Select **File -> Publish to HTML** to produce the following result.

M-file published to HTML format.

Publishing automatically generates a contents listing with links to all cell (section) titles.

Automatic formatting makes cell titles bold and shows code in a monospace font.

Results from running the M-file are included in the published document.

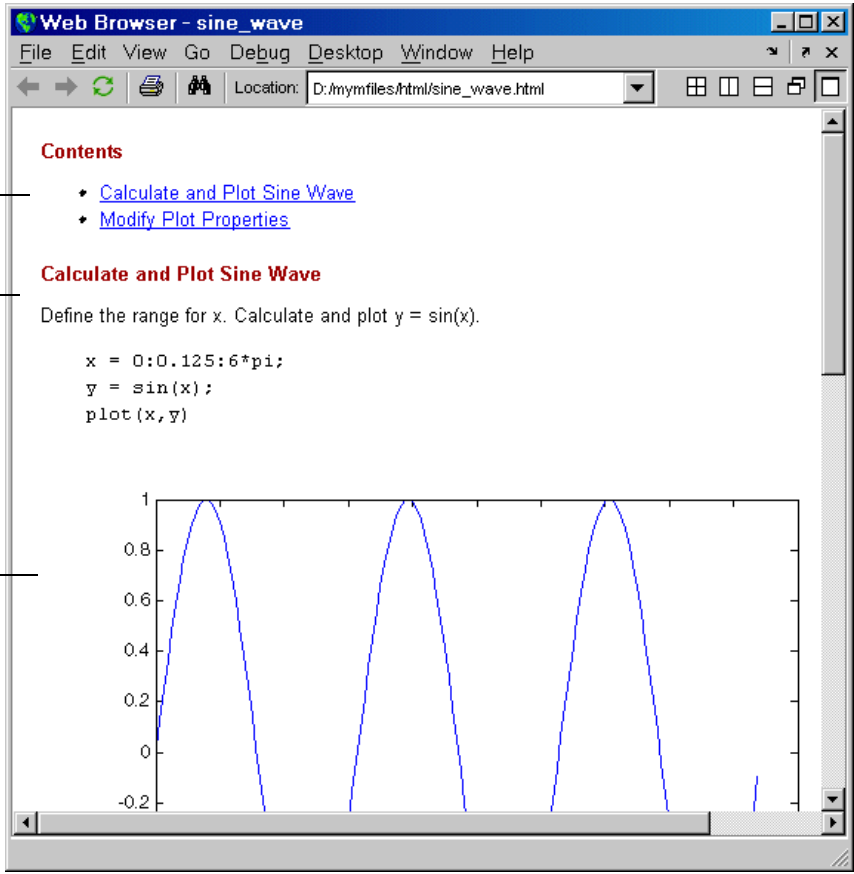

### Example of Publishing with Text Markup

This simple example adds text markup to the `sine_wave.m` file used in “Example of Publishing Without Text Markup” on page 8-3 to produce the following published HTML document. General instructions for marking up M-files for publishing follow this example.

Add a title for the document.

## Plot Sine Wave

Calculate and plot a sine wave.

### Contents

- [Calculate and Plot Sine Wave](#)
- [Modify Plot Properties](#)

### Calculate and Plot Sine Wave

Display comment lines using TeX format.

Define the range for  $x$ .


$$0 \leq 6\pi$$

Make selected comment text appear in monospace.

Calculate and plot  $y = \sin(x)$ .

```
x = 0:0.125:6*pi;
y = sin(x);
plot(x,y)
```

Reduce the size of the figure output in the document using Preferences for Publishing Images.

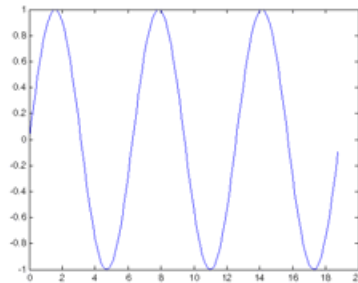

### Modify Plot Properties

```
title('Sine Wave','FontWeight','bold')
xlabel('x')
```

**1** Add an overall title for the published document

- a** Add a blank line at the top of the file.
- b** Select **Cell -> Insert Text Markup -> Cell Title**. MATLAB adds the following in the new blank line and adds a blank line beneath it.

```
%% TITLE
```

The %% indicates the start of a new cell, where a cell is a section of an M-file.

- c** Type over the text **TITLE**, replacing it with **Plot Sine Wave**. Add a comment about the overall file in line 2. Type

```
% Calculate and plot a sine wave.
```

and add a blank line beneath it for better readability.

You can add any overall comments about the file in the lines following the this title. You cannot add code after the first title and before the next cell (line starting with %%) if you want the first title to appear as the overall document title.

**2** Display equations in comments with symbols and Greek characters using the TeX format. For a list of symbols you can display and the character sequence to create them, see the `String` property on the MATLAB reference page for graphics text properties.

- a** Position the cursor in the line 5, Define the range for  $x$ .
- b** Use text markup to insert a comment containing the equation

$$0 \leq x \leq 6\pi$$

Select **Cell -> Insert Text Markup -> Insert TeX Equation**.

MATLAB inserts the following lines that contain a sample equation you will replace.

```
%  
% $$e^{\pi i} + 1 = 0$$  
%
```

The sample equation is the text between the set of \$\$, and is highlighted.

- c Type the following TeX equation to replace the sample equation.

```
0 \leq x \leq 6\pi
```

The three new lines that will display the TeX equation in the published document appear as follows in the M-file.

```
%
% $$0 \leq x \leq 6\pi$$
%
```

- 3 Display selected comment text in a monospaced font.

- a Position the cursor in the comment in line 9

```
% Calculate and plot y = sin(x).
```

- b To make the equation  $y = \sin(x)$  appear in monospace in the published document, add the | symbol before and after the equation so it appears as follows.

```
% Calculate and plot |y = sin(x)|.
```


- 4 To reduce the size of the resulting figure, select **File -> Preferences -> Editor/Debugger -> Publishing Images**. In the **Preferences** dialog box, for **Resize image**, select the check box **Restrict height to** and enter 200 for the number of pixels. Click **OK** to close the dialog box.

- 5 Select **File -> Save and Publish to HTML**.

The HTML file displays in your system's default browser, as shown at the start of this example, "Example of Publishing with Text Markup" on page 8-4

- 6 By default, MATLAB stores the HTML document, `sine_wave.html`, and the associated image files in `d:/mymfiles/html` for this example.

The file `sine_wave.m` now appears as shown in the following illustration.

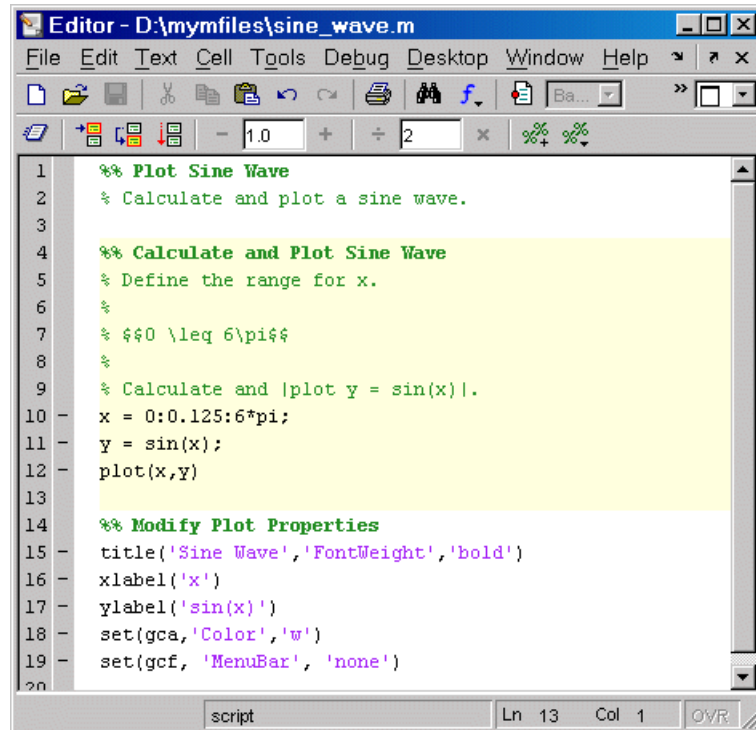

The screenshot shows a MATLAB editor window titled "Editor - D:\mymfiles\sine\_wave.m". The window contains the following MATLAB code:

```
1 %% Plot Sine Wave
2 % Calculate and plot a sine wave.
3
4 %% Calculate and Plot Sine Wave
5 % Define the range for x.
6 %
7 %  $0 \leq x \leq 6\pi$ 
8 %
9 % Calculate and plot  $y = \sin(x)$ .
10 x = 0:0.125:6*pi;
11 y = sin(x);
12 plot(x,y)
13
14 %% Modify Plot Properties
15 title('Sine Wave','FontWeight','bold')
16 xlabel('x')
17 ylabel('sin(x)')
18 set(gca,'Color','w')
19 set(gcf, 'MenuBar', 'none')
20
```

The status bar at the bottom of the window shows "script", "Ln 13", "Col 1", and "OVR".



## Marking Up Text in Cells for Publishing

To publish an M-file and results, mark up the file using cell features. This adds and formats comments for the published results. You can include the markup as you write the basic code, mark up the file after you've written the code, or do both. The markup applies to any of the available publishing options: HTML, XML, LaTeX, Word, and PowerPoint.

Any cell features you use for evaluating and improving your code will be used for publishing purposes as well. The “Example of Publishing Without Text Markup” on page 8-3 shows how the cells used for improving an M-file appear when the M-file is published. You might want to change the existing cells for publishing purposes, but note that of course changes the cells for evaluation purposes as well. For example, to use text markup and format comments in the output document, the comments must appear at the start of a cell, before any code.

Mark up comment text in one of two ways:

- Use **Cell -> Insert Text Markup** menu items to format the code, which automatically inserts the markup symbols for you, or
- Type the markup symbols directly in the code. Note that what you type is the same as the code that results if you instead use the equivalent menu item.

The following table describes each markup option and how to use it, and refers to “Example of Publishing with Text Markup” on page 8-4.

<b>Format</b>	<b>Menu Item to Produce Format (Cell -&gt; Insert Text Markup -&gt; Item)</b>	<b>Resulting Code</b>	<b>Published Results</b>
Overall document heading	<p><b>Cell Title</b></p> <p>Add a blank line at the top of the M-file, select this menu item, and replace <b>TITLE</b> in the resulting text with the document heading you want.</p> <p>See step 1 in the example.</p>	<p><b>%% TITLE</b></p> <p>Add any overall comments about the file in the lines following this title. But do not add code after the first title and before the next cell (line starting with %) if you want the first title to appear as the overall document title.</p> <p>In the example, it is</p> <p><b>%% Plot Sine Wave</b></p>	<p>Formatted as a top level heading (h1 in HTML), using a large bold font.</p> <p>Note that the title text automatically appears in bold in the M-file and in the resulting published document.</p>
Section title (also known as a cell title)	<p><b>Cell Title</b></p> <p>Position the cursor at the start of a cell, select this menu item, and replace <b>TITLE</b> in the resulting text with the cell title you want.</p>	<p><b>%% TITLE</b></p> <p>In the example, these are</p> <p><b>%% Calculate and Plot Sine Wave</b></p> <p><b>%% Modify Plot Properties</b></p>	<p>Formatted as a heading (h2 in HTML), using a medium size, bold font.</p> <p>Note that the title text automatically appears in bold in the M-file and in the resulting published document.</p>

<b>Format</b>	<b>Menu Item to Produce Format (Cell -&gt; Insert Text Markup -&gt; Item)</b>	<b>Resulting Code</b>	<b>Published Results (Continued)</b>
Descriptive text	<p><b>Descriptive Text</b></p> <p>Position the cursor where you want to add a formatted comment, select this menu item, and replace the resulting DESCRIPTIVE TEXT with your comment.</p>	% DESCRIPTIVE TEXT	<p>Text appears as a formatted comment in the output.</p> <p>Note that descriptive text must appear before the first line of code in a cell.</p>
Bold text	<p><b>Bold Text</b></p> <p>Select the text within a comment that you want to appear in bold and then select this menu item.</p> <p>If no text is selected, inserts a new bold comment with sample text, and you replace the sample text.</p>	% *Bold text*	<p>Text appears in bold.</p> <p><b>Bold text</b></p>

<b>Format</b>	<b>Menu Item to Produce Format (Cell -&gt; Insert Text Markup -&gt; Item)</b>	<b>Resulting Code</b>	<b>Published Results (Continued)</b>
Monospaced text	<p><b>Monospaced text</b></p> <p>Select the text within a comment that you want to appear in a monospaced font and then select this menu item. See step 3 in the example.</p> <p>If no text is selected, inserts a new monospaced comment with sample text, and you replace the sample text.</p>	<pre>%  Monospaced text </pre>	<p>Text appears in monospace.</p> <p>Monospaced text</p>

<b>Format</b>	<b>Menu Item to Produce Format (Cell -&gt; Insert Text Markup -&gt; Item)</b>	<b>Resulting Code</b>	<b>Published Results (Continued)</b>
Indented text	<p><b>Preformatted Text</b></p> <p>Position the cursor before the line where you want to add indented text and select this menu item. Replace the sample text inserted with the text you want, including tabs and spaces.</p> <p>A line of preformatted text must begin with a % symbol, followed by two or more spaces.</p>	<pre>% % Preformatted % Text %</pre> <p>The blank comment lines above and below the preformatted lines distinguish the lines in between as preformatted.</p>	<p>The indents, spacing, and line lengths in the M-file are preserved in the output.</p> <p>Preformatted Text</p>
Bullets	<p><b>Bulleted List</b></p> <p>Position the cursor before the line where you want to add a bulleted list and select this menu item. Replace the sample text inserted, ITEM 1 and ITEM 2, with the text you want.</p>	<pre>% % * Item1 % * Item2 %</pre> <p>The blank comment lines above and below the bullet items, as well as the * before each item, distinguish the bulleted list.</p>	<p>Items appear in a bulleted list.</p> <ul style="list-style-type: none"> <li>• Item1</li> <li>• Item2</li> </ul>


Format	Menu Item to Produce Format (Cell -> Insert Text Markup -> Item)	Resulting Code	Published Results (Continued)
Equations and symbols	<p><b>TeX Equation</b></p> <p>Position the cursor before the line where you want to add an equation or symbols and select this menu item. Replace the sample text inserted, <math>e^{\pi i} + 1 = 0</math>, with the TeX equation you want. See step 2 in the example.</p> <p>For a list of symbols you can display and the character sequence to create them, see the String property on MATLAB graphics reference page for text properties.</p>	<pre>% % \$\$e^{\pi i} + 1 = 0\$\$ %</pre> <p>The blank comment lines above and below the equation line, as well as the \$\$ before and after the equation text, distinguish the TeX equation.</p>	<p>Equation and symbols appear in TeX output format.</p> $e^{\pi i} + 1 = 0$
Links (for HTML output)	Enter comment text that includes a valid Internet address.	<pre>% http://www.mathworks.com</pre>	<pre>http://www.mathworks.com</pre>

## Publishing M-Files Using Cells

When you publish an M-file that contains cells and text markup, MATLAB produces an output document consisting of the M-file code, comments, and results.

### How to Publish an M-File

After adding cells and text markup to an M-file, select **File -> Publish To** and select an output format from those listed in the menu: **HTML**, **XML**, **LaTeX**, **Word**, or **PowerPoint**. If the M-file contains unsaved changes, the menu item becomes **Save and Publish To**.

You can also publish to the default output format using the publish button  in the Editor toolbar.

MATLAB displays the published document in the appropriate tool for the selected output format:

- HTML displays in your system's default Web browser.
- XML displays in the MATLAB Editor.
- LaTeX displays in the MATLAB Editor.
- Word displays in Microsoft Word.
- PowerPoint displays in Microsoft PowerPoint.

---

**Note** Publishing to Microsoft Word and to PowerPoint features are available only on PC and Macintosh systems that have the applications installed.

---

The published file contains the formatted comments, code including syntax highlighting, and results (in gray to distinguish it from code) for each cell, and for all cells in the M-file. When code produces a figure, the last figure generated in a cell appears in the published file. It also contains a **Contents** heading at the top of the file with a bulleted list of links to the named cells in the rest of the document.

### **Function Alternative**

From the Command Window, run the `publish` function to run the M-file and publish the results. See the reference page for options you can set.

## **About Published M-Files**

### **Published Filenames and Locations**

MATLAB names the published file the same as the M-file that produced it, adding the relevant extension for the selected output format: `.html`, `.xml`, `.tex`, `.doc`, or `.ppt`. MATLAB stores this output file, along with supporting files such as images of figure windows, in the `html` subdirectory under the directory containing the M-file you published.

For example, when you publish `d:/mymfiles/sine_wave.m` to HTML, MATLAB creates a directory `d:/mymfiles/html` that includes the published document `sine_wave.html`. Any figure windows produced by running the M-file appears as an image file in the directory, for example, `sine_wave_img.png`. TeX equations are image files as well: in the example, the equation file is `sine_wave_eq_eq####.png`. In addition, MATLAB creates a thumbnail file for the document, `sine_wave_img_thumbnail.png` in the example, used in the Visual Directory in the Current Directory browser.



## Publishing Code that Displays Hyperlinks in Command Window

If the M-file you publish contains statements that display hyperlinks in the MATLAB Command Window, the published document shows the code rather than the hyperlinks.

For example

```
disp(' <a href="http://www.mathworks.com">Link to MathWorks</a>')
```

displays

[Link to MathWorks](http://www.mathworks.com)

in the Command Window. You can click the link to go to the MathWorks Web site. When that `disp` statement is in an M-file you publish, the hyperlink tag and the text between it, that is,

```
<a href="http://www.mathworks.com">Link to MathWorks</a>
```

rather than the link, appears in the published document.

Similarly results occur if you include

```
help matlab_functionname
```

in an M-file.

## Modifying Published Output Via Preferences

Use preferences to control execution, output, and options related to images created during publishing. For details about these preferences, click the **Help** button in the **Preferences** dialog box for those panels to view the following sections in the online documentation:

- “Publishing Preferences for the Editor/Debugger”
- “Publishing Images Preferences for the Editor/Debugger”

## Notebook for Publishing to Word

Notebook allows you to access the numeric computation and visualization software of MATLAB from within the word processing environment, Microsoft Word. Using Notebook, you can create a document, called an *M-book*, that contains text, MATLAB commands, and the output from MATLAB commands.

You can think of an M-book as a record of an interactive MATLAB session annotated with text, or as a document embedded with live MATLAB commands and output. Notebook is useful for creating electronic or printed records of MATLAB sessions, class notes, textbooks or technical reports. This section introduces basic Notebook capabilities:

- “Creating an M-Book” on page 8-18
- “Entering MATLAB Commands in an M-Book” on page 8-21
- “Protecting the Integrity of Your Workspace in M-Books” on page 8-22
- “Ensuring Data Consistency in M-Books” on page 8-22

---

**Note** Notebook is available only on Windows and Macintosh systems that have Microsoft Word installed.

---

### Creating an M-Book

This section includes

- “Creating an M-Book from MATLAB” on page 8-19
- “Creating an M-Book While Running Notebook” on page 8-20
- “Opening an Existing M-Book” on page 8-20
- “Converting a Word Document to an M-Book” on page 8-21

## Creating an M-Book from MATLAB

To create a new M-book from within MATLAB, type


```
notebook
```

at the prompt. If you are running Notebook for the first time, you may need to configure it. See “Configuring Notebook” on page 8-39 for more information.

Notebook starts Microsoft Word on your system and creates a new M-book, called Document1.

When Word is opening, if a dialog box appears asking you to enable or disable macros, choose to enable macros. Notebook defines Microsoft Word macros that enable MATLAB to interpret the different types of cells that hold MATLAB commands and their output. For more information on macro security, see “Configuring Notebook” on page 8-39.

Notebook adds the **Notebook** menu to the Word menu bar. Use this menu, illustrated below, to access Notebook features.

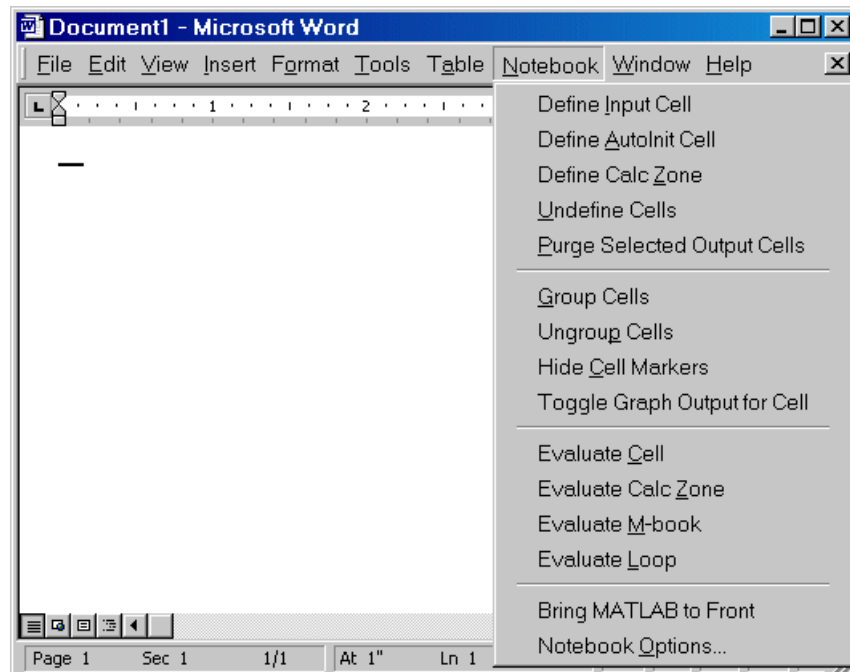

## Creating an M-Book While Running Notebook


With Notebook running, you can create a new M-book by selecting **New M-book** from the Word **File** menu.

## Opening an Existing M-Book

You can use the notebook command to open an existing M-book

```
notebook filename
```

where filename is the M-book you want to open, or you can simply double-click on an M-book file in a Windows file management tool, such as Explorer.

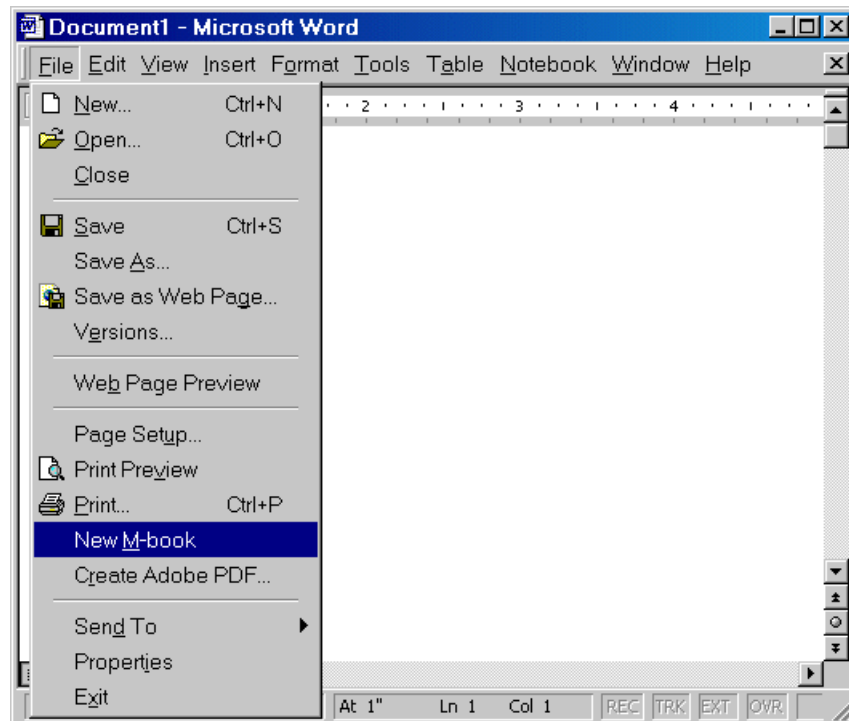

When you double-click on an M-book, Microsoft Word opens the M-book and starts MATLAB if it is not already running. Notebook adds the **Notebook** menu to the Word menu bar and adds **New M-book** to the **File** menu.

## Converting a Word Document to an M-Book

To convert a Word document to an M-book, follow these steps:

- 1 Create a new M-book.
- 2 From the **Insert** menu, select the **File**.
- 3 Select the file you want to convert.
- 4 Click **OK**.

## Entering MATLAB Commands in an M-Book

---

**Note** A good way to learn how to use Notebook is to open the sample M-book, `Readme.doc`, and try out the various techniques described in this section. You can find this file in the `$matlabroot/notebook/pc` directory.

---

You enter MATLAB commands in an M-book the same way you enter text in any other Word document. For example, you can enter the following text in a Word document. The example uses text in Courier Font but you can use any font:

```
Here is a sample M-book.
```

```
a = magic(3)
```

To execute the MATLAB `magic` command in this document, you must

- Define the command as an input cell
- Evaluate the input cell

MATLAB displays the output of the command in the Word document in an output cell.

## Protecting the Integrity of Your Workspace in M-Books

When you work on more than one M-book in a single word processing session, note that:

- Each M-book uses the same “copy” of MATLAB.
- All M-books share the same workspace.

If you use the same variable names in more than one M-book, data used in one M-book can be affected by another M-book. You can protect the integrity of your workspace by specifying the `clear` command as the first autoinit cell in the M-book.

## Ensuring Data Consistency in M-Books

An M-book can be thought of as a sequential record of a MATLAB session. When executed in order, from the first MATLAB command to the last, the M-book accurately reflects the relationships among these commands.

If, however, you change an input cell or output cell as you refine your M-book, Notebook does not automatically recalculate input cells that depend on either the contents or the results of the changed cells. As a result, the M-book may contain inconsistent data.

When working on an M-book, you might find it useful to select **Evaluate M-book** periodically to ensure that your M-book data is consistent. You could also use calc zones to isolate related commands in a section of the M-book. You can then use **Evaluate Calc Zone** to execute only those input cells contained in the calc zone.

## Debugging and Notebook

Do not use debugging functions or use the Editor/Debugger while evaluating cells with Notebook. Instead debug M-files from within MATLAB, and then after completing debugging, clear all the breakpoints and access the M-file via Notebook. If you debug while evaluating from Notebook, you might experience problems with MATLAB.

## Defining MATLAB Commands as Input Cells for Notebook

To define a MATLAB command in a Word document as an input cell:

- 1 Type the command into the M-book as text. For example,

This is a sample M-book.

```
a = magic(3)
```

- 2 Position the cursor anywhere in the command and select **Notebook -> Define Input Cell** or press **Alt+D**. If the command is embedded in a line of text, use the mouse to select it. Notebook defines the MATLAB command as an input cell:

This is a sample M-book.

```
[a = magic(3)]
```

Note how Notebook changes the character font of the text in the input cell to a bold, dark green color and encloses it within *cell markers*. Cell markers are bold, gray brackets. They differ from the brackets used to enclose matrices by their size and weight. For information about changing these default formats, see “Modifying Styles in the M-Book Template” on page 8-33.

For information about defining other types of input cells, see

- “Defining Cell Groups for Notebook” on page 8-23
- “Defining Autoinit Input Cells for Notebook” on page 8-25
- “Defining Calc Zones for Notebook” on page 8-25
- “Converting an Input Cell to Text with Notebook” on page 8-26

For information about evaluating the input cells you define, see “Evaluating MATLAB Commands with Notebook” on page 8-27.

### Defining Cell Groups for Notebook

You can collect several input cells into a single input cell. This is called a *cell group*. Because all the output from a cell group appears in a single output cell that Notebook places immediately after the group, cell groups are useful when several MATLAB commands are needed, such as, to fully define a graphic.

For example, if you define all the MATLAB commands that produce a graphic as a cell group and then evaluate the cell group, Notebook generates a single graphic that includes all the graphic components defined in the commands. If instead you define all the MATLAB commands that generate the graphic as separate input cells, evaluating the cells generates multiple graphic output cells.

See “Evaluating Cell Groups with Notebook” on page 8-28 for information about evaluating a cell group. For information about undefining a cell group, see “Ungroup Cells” on page 8-47.

### **Creating a Cell Group for Notebook**

To create a cell group:

- 1** Use the mouse to select the input cells that are to make up the group.
- 2** Select **Notebook -> Group Cells** or press **Alt+G**.

Notebook converts the selected cells into a cell group and replaces cell markers with a single pair that surrounds the group:

This is a sample cell group.

```
[date  
a = magic(3) ]
```

Note the following:

- A cell group cannot contain output cells. If the selection includes output cells, Notebook deletes them.
- A cell group cannot contain text. If the selection includes text, Notebook places the text after the cell group. However, if the text precedes the first input cell in the selection, Notebook leaves it where it is.
- If you select part or all of an output cell but not its input cell, Notebook includes the input cell in the cell group.

When you create a cell group, Notebook defines it as an input cell unless its first line is an autoint cell, in which case Notebook defines the group as an autoint cell.



## Defining Autoinit Input Cells for Notebook

You can use *autoinit cells* to specify MATLAB commands to be automatically evaluated each time an M-book is opened. This is a quick and easy way to initialize the workspace. *Autoinit cells* are simply input cells with the following additional characteristics:

- Notebook evaluates the autoinit cells when it opens the M-book.
- Notebook displays the commands in autoinit cells using dark blue characters.

Autoinit cells are otherwise identical to input cells.

### Creating an Autoinit Cell for Notebook

You can create an autoinit cell in two ways:

- Enter the MATLAB command as text, then convert the command to an autoinit cell by selecting **Notebook -> Define AutoInit Cell**.
- If you already entered the MATLAB command as an input cell, you can convert the input cell to an autoinit cell. Either select the input cell or position the cursor in the cell, then select **Notebook -> Define AutoInit Cell**.

See “Evaluating MATLAB Commands with Notebook” on page 8-27 for information about evaluating autoinit cells.

## Defining Calc Zones for Notebook

You can partition an M-book into self-contained sections, called *calc zones*. A calc zone is a contiguous block of text, input cells, and output cells. Notebook inserts Microsoft Word section breaks before and after the section to define the calc zone. The section break indicators include bold, gray brackets to distinguish them from standard Word section breaks.

You can use calc zones to prepare problem sets, making each problem a separate calc zone that can be created and tested on its own. An M-book can contain any number of calc zones.

---

**Note** Using calc zones does not affect the scope of the variables in an M-book. Variables used in one calc zone are accessible to all calc zones.

---

## Creating a Calc Zone

After you create the text and cells you want to include in the calc zone, you define the calc zone by following these steps:

- 1 Select the input cells and text to be included in the calc zone.
- 2 Select **Notebook -> Define Calc Zone**.

---

**Note** You must select an input cell and its output cell in their entirety to include them in the calc zone.

---

See “Evaluating a Calc Zone with Notebook” on page 8-30 for information about evaluating a calc zone.

## Converting an Input Cell to Text with Notebook

To convert an input cell (or an autoint cell or a cell group) to text:

- 1 Select the input cell with the mouse or position the cursor in the input cell.
- 2 Select **Notebook -> Undefine Cells** or press **Alt+U**.

When Notebook converts the cell to text, it reformats the cell contents according to the Microsoft Word Normal style. For more information about M-book styles, see “Modifying Styles in the M-Book Template” on page 8-33. When you convert an input cell to text, Notebook also converts the corresponding output cell to text.

## Evaluating MATLAB Commands with Notebook

After you define a MATLAB command as an input cell, or as an autoint cell, you can evaluate it in your M-book. Use the following steps to define and evaluate a MATLAB command:

- 1 Type the command into the M-book as text. For example:

```
This is a sample M-book
```

```
a = magic(3)
```

- 2 Position the cursor anywhere in the command. If the command is embedded in a line of text, use the mouse to select it. Then select **Notebook -> Define Input Cell** or press **Alt+D**.

Notebook defines the MATLAB command as an input cell. For example:

```
This is a sample M-book
```

```
[a = magic(3)]
```

- 3 Specify the input cell to be evaluated by selecting it with the mouse or by placing the cursor in it. Then select **Notebook -> Evaluate Cell** or press **Ctrl+Enter**.

Notebook evaluates the input cell and displays the results in a output cell immediately following the input cell. If there is already an output cell, Notebook replaces its contents, wherever it is in the M-book. For example:

```
This is a sample M-book.
```

```
[a = magic(3) ]
```

```
[a =  
 8     1     6  
 3     5     7  
 4     9     2 ]
```

The text in the output cell is blue and is enclosed within cell markers. Cell markers are bold, gray brackets. They differ from the brackets used to enclose matrices by their size and weight. Error messages appear in red. For information about changing these default formats, see “Modifying Styles in the M-Book Template” on page 8-33.

For more information about evaluating MATLAB commands in an M-book, see

- “Evaluating Cell Groups with Notebook” on page 8-28
- “Evaluating a Range of Input Cells with Notebook” on page 8-29
- “Evaluating a Calc Zone with Notebook” on page 8-30
- “Evaluating an Entire M-Book” on page 8-30
- “Using a Loop to Evaluate Input Cells Repeatedly with Notebook” on page 8-31.
- “Converting Output Cells to Text with Notebook” on page 8-32
- “Deleting Output Cells with Notebook” on page 8-32

## Evaluating Cell Groups with Notebook

You evaluate a cell group the same way you evaluate an input cell (because a cell group is an input cell):

- 1** Position the cursor anywhere in the cell or in its output cell.
- 2** Select **Notebook -> Evaluate Cell** or press **Ctrl+Enter**.

For information about creating a cell group, see “Defining Cell Groups for Notebook” on page 8-23.

When MATLAB evaluates a cell group, the output for all commands in the group appears in a single output cell. By default, Notebook places the output cell immediately after the cell group the first time the cell group is evaluated. If you evaluate a cell group with an existing output cell, Notebook places the results in the output cell wherever it is located in the M-book.

---


**Note** Text or numeric output always comes first, regardless of the order of the commands in the group.

---

The illustration shows a cell group and the figure created when you evaluate the cell group.

This is a sample M-book with a cell group.

```
t = 0:pi/100:2*pi;  
y = sin(t);  
plot(t,y) ]
```

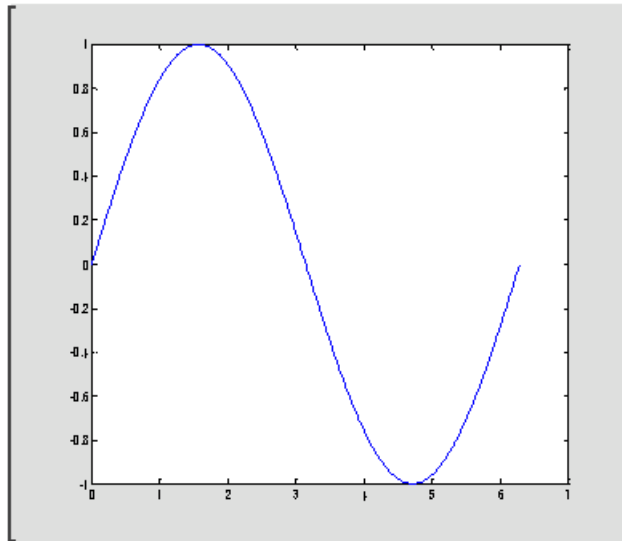

## Evaluating a Range of Input Cells with Notebook

To evaluate more than one MATLAB command contained in different but contiguous input cells:

- 1 Select the range of cells that includes the input cells you want to evaluate. You can include text that surrounds input cells in your selection.
- 2 Select **Notebook -> Evaluate Cell** or press **Ctrl+Enter**.

Notebook evaluates each input cell in the selection, inserting new output cells or replacing existing ones.

## Evaluating a Calc Zone with Notebook

To evaluate a calc zone:

- 1 Position the cursor anywhere in the calc zone.
- 2 Select **Notebook -> Evaluate Calc Zone** or press **Alt+Enter**.

For information about creating a calc zone, see “Defining Calc Zones for Notebook” on page 8-25.

By default, Notebook places the output cell immediately after the calc zone the first time the calc zone is evaluated. If you evaluate a calc zone with an existing output cell, Notebook places the results in the output cell wherever it is located in the M-book.

## Evaluating an Entire M-Book

To evaluate the entire M-book, either select **Notebook -> Evaluate M-book** or press **Alt+R**.

Notebook begins at the top of the M-book regardless of the cursor position and evaluates each input cell in the M-book. As it evaluates the M-book, Notebook inserts new output cells or replaces existing output cells.

## Controlling Execution of Multiple Commands

When you evaluate an entire M-book, and an error occurs, evaluation continues. If you want to stop evaluation if an error occurs, follow this procedure:

- 1 Select **Notebook -> Notebook Options**.


The **Notebook Options** dialog box opens.

- 2 Select the **Stop evaluating on error** check box and click **OK**.

## Using a Loop to Evaluate Input Cells Repeatedly with Notebook

To evaluate a sequence of MATLAB commands repeatedly:

- 1 Use the mouse to select the input cells, including any text or output cells located between them.
- 2 Select **Notebook -> Evaluate Loop** or press **Alt+L**. Notebook displays the **Evaluate Loop** dialog box.

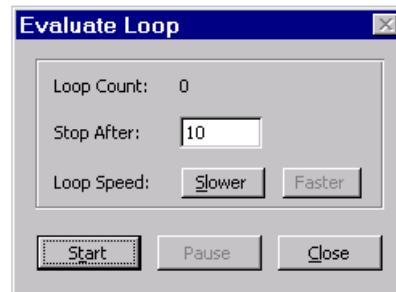

- 3 Enter the number of times you want MATLAB to evaluate the selected commands in the **Stop After** field, then click **Start**. The button changes to **Stop**. Notebook begins evaluating the commands and indicates the number of completed iterations in the **Loop Count** field.

You can increase or decrease the delay at the end of each iteration by clicking **Slower** or **Faster**. Slower increases the delay. Faster decreases the delay.

To suspend evaluation of the commands, click **Pause**. The button changes to **Resume**. Click **Resume** to continue evaluation.

To stop processing the commands, click **Stop**. To close the **Evaluate Loop** dialog box, click **Close**.

## Converting Output Cells to Text with Notebook

You can convert an output cell to text by undefining cells. If the output is numeric or textual, Notebook removes the cell markers and converts the cell contents to text according to the Microsoft Word Normal style. If the output is graphical, Notebook removes the cell markers and dissociates the graphic from its input cell, but does not alter its contents.

---

**Note** Undefining an output cell does not affect the associated input cell.

---

To undefine an output cell:

- 1 Select the output cell you want to undefine.
- 2 Select **Notebook -> Undefine Cells** or press **Alt+U**.

## Deleting Output Cells with Notebook

To delete output cells:

- 1 Select an output cell, using the mouse, or place the cursor in the output cell.
- 2 Select **Notebook -> Purge Selected Output Cells** or press **Alt+P**.

If you select a range of cells, Notebook deletes all the output cells in the selected range, but any associate input cells remain intact.



## Printing and Formatting an M-Book

This section describes

- “Printing an M-Book” on page 8-33
- “Modifying Styles in the M-Book Template” on page 8-33
- “Choosing Loose or Compact Format for Notebook” on page 8-34
- “Controlling Numeric Output Format for Notebook” on page 8-35
- “Controlling Graphic Output for Notebook” on page 8-35

### Printing an M-Book

You can print all or part of an M-book by selecting **File -> Print**. Word follows these rules when printing M-book cells and graphics:

- Cell markers are not printed.
- Input cells, autoinit cells, and output cells (including error messages) are printed according to their defined styles. If you prefer to print these cells using black type instead of colors or shades of gray, you can modify the styles.

### Modifying Styles in the M-Book Template

You can control the appearance of the text in your M-book by modifying the predefined styles stored in the M-book template. These styles control the appearance of text and cells. By default, M-books use the Word Normal style for all other text.

For example, if you print an M-book on a color printer, input cells appear dark green, output and autoinit cells appear dark blue, and error messages appear red. If you print the M-book on a grayscale printer, these cells appear as shades of gray. To print these cells using black type, you need to modify the color of the Input, Output, AutoInit, and Error styles in the M-book template.

The table below describes the default styles used by Notebook. If you modify styles, you can use the information in the tables below to help you return the styles to their original settings. For general information about using styles in Word documents, see the Word documentation.

<b>Style</b>	<b>Font</b>	<b>Size</b>	<b>Weight</b>	<b>Color</b>
Normal	Times New Roman	10 points		Black
AutoInit	Courier New	10 points	Bold	Dark blue
Error	Courier New	10 points	Bold	Red
Input	Courier New	10 points	Bold	Dark green
Output	Courier New	10 points		Blue

When you change a style, Word applies the change to all characters in the M-book that use that style and gives you the option to change the template. Be cautious about making changes to the template. If you choose to apply the changes to the template, you will affect all new M-books you create using the template. See the Word documentation for more information.

## Choosing Loose or Compact Format for Notebook

You can specify whether a blank line appears between the input and output cells by selecting the loose or compact format:

- 1** Select **Notebook -> Notebook Options**.
- 2** In the **Notebook Options** dialog box, select either **Loose** or **Compact**. Loose format adds an empty line. Compact format does not.
- 3** Click **OK**.

---

**Note** Changes you make using the **Notebook Options** dialog box take effect for output generated *after* you click **OK**. To affect existing input or output cells, you must reevaluate the cells.

---

## Controlling Numeric Output Format for Notebook

To change how Notebook displays numeric output:

- 1 Select **Notebook** -> **Notebook Options**.
- 2 In the **Notebook Options** dialog box, select a format from the **Numeric Format** list. These settings correspond to the choices available with the MATLAB format command.
- 3 Click **OK**.

---

**Note** Changes you make using the **Notebook Options** dialog box take effect for output generated *after* you click **OK**. To affect existing input or output cells, you must reevaluate the cells.

---

## Controlling Graphic Output for Notebook


This section describes how to control several aspects of the graphic output produced by MATLAB commands in an M-book, including

- “Embedding Graphic Output in the M-Book” on page 8-36
- “Suppressing Graphic Output for Individual Input Cells in Notebook” on page 8-37
- “Sizing Graphic Output in Notebook” on page 8-37
- “Cropping Graphic Output in Notebook” on page 8-38
- “Adding White Space Around Graphic Output in Notebook” on page 8-38
- “Specifying Color Mode in Notebook” on page 8-38

## Embedding Graphic Output in the M-Book

By default, graphic output is embedded in an M-book. To display graphic output in a separate figure window:

- 1 Select **Notebook -> Notebook Options**.
- 2 In the **Notebook Options** dialog box, clear the **Embed Figures in M-book** check box.



- 3 Click **OK**.

---

**Note** Embedded figures do not include Handle Graphics objects generated by the `uicontrol` and `uimenu` functions.

---

Notebook determines whether to embed a figure in the M-book by examining the value of the figure object's `Visible` property. If the value of the property is `off`, Notebook embeds the figure. If the value of this property is `on`, all graphic output is directed to the current figure window.

## Suppressing Graphic Output for Individual Input Cells in Notebook

If an input or autoinit cell generates figure output that you want to suppress:

- 1 Place the cursor in the input cell.
- 2 Select **Notebook -> Toggle Graph Output for Cell**.

Notebook suppresses graphic output from the cell, inserting the string (no graph) after the input cell.

To allow graphic output for a cell, repeat the procedure. Notebook removes the (no graph) marker and allows graphic output from the cell.

---

**Note** **Toggle Graph Output for Cell** overrides the **Embed Figures in M-book** option, if that option is set.

---

## Sizing Graphic Output in Notebook

To set the default size of embedded graphics in an M-book:

- 1 Select **Notebook -> Notebook Options**.
- 2 In the **Notebook Options** dialog box, use the **Units**, **Height**, and **Width** fields to set the size of graphics generated by the M-book.
- 3 Click **OK**.

---

**Note** Changes you make using the **Notebook Options** dialog box take effect for graphic output generated *after* you click **OK**. To affect existing input or output cells, you must reevaluate the cells.

---

You change the size of an existing embedded figure by selecting the figure, clicking the left mouse button anywhere in the figure, and dragging the resize handles of the figure. If you resize an embedded figure using its resize handles and then regenerate the figure, its size reverts to its original size.

### Cropping Graphic Output in Notebook

To crop an embedded figure to cut off areas you do not want to show:

- 1 Select the graphic by clicking the left mouse button anywhere in the figure.
- 2 Hold down the **Shift** key.
- 3 Drag a sizing handle toward the center of the graphic.

### Adding White Space Around Graphic Output in Notebook

You can add white space around an embedded figure by moving the boundaries of a graphic outward. Select the graphic, then hold down the **Shift** key and drag a sizing handle away from the graphic.

### Specifying Color Mode in Notebook

If you print graphic output that includes surfaces or patches, the output uses 16-color mode by default. To use 256-color mode:

- 1 Select **Notebook -> Notebook Options**.
- 2 Clear the **Use 16-Color Figures** check box in the **Notebook Options** dialog box.
- 3 Click **OK**.

---

**Note** Changes you make using the **Notebook Options** dialog box take effect for graphic output generated *after* you click **OK**. To affect existing input or output cells, you must reevaluate the cells.

---

## Configuring Notebook

After you install Notebook but before you begin using it, you must configure it. (Notebook is installed as part of the MATLAB installation process. For more information, see the MATLAB installation documentation for your platform.)

In Word versions for Office 2000 or higher, before configuring Notebook, you must specify that Word can use the Notebook macros. Do either of the following:

- Set the macro security level to medium. In Word, select **Tools -> Macros -> Security**, and in the resulting dialog box, choose **Medium**.
- After launching Notebook, when Word first opens, a security warning dialog box appears. In the dialog box, select **Always trust macros from this source**. This allows you to use Notebook, but still maintain a high security level for other macros you use in Word.

To configure Notebook:

- 1 In the MATLAB command window, type  
`notebook -setup`

Notebook prompts you to specify which version of Microsoft Word you are using.

```
Welcome to the utility for setting up the MATLAB Notebook for  
interfacing MATLAB to Microsoft Word
```

```
Choose your version of Microsoft Word:
```

- ```
[1] Microsoft Word 97  
[2] Microsoft Word 2000  
[3] Microsoft Word 2002 (XP)  
[4] Exit, making no changes
```

```
Microsoft Word Version:
```

- 2** Type the number that corresponds to your version. For example, type 3 if you have Microsoft Word 2000 XP.

Notebook performs the setup. If Notebook cannot find all of the necessary files, it will prompt you to specify the locations of the files, including the Microsoft Word executable (`winword.exe`) and the template file (`normal.dot`).

When setup is complete, the following message appears:

Notebook setup is complete.



## Notebook Feature Reference

This section provides reference information about each of the Notebook features, listed alphabetically. To use these features, select them from the **Notebook** menu:

- “Bring MATLAB to Front” on page 8-41
- “Define Autoinit Cell” on page 8-41
- “Define Calc Zone” on page 8-42
- “Define Input Cell” on page 8-42
- “Evaluate Calc Zone” on page 8-43
- “Evaluate Cell” on page 8-43
- “Evaluate Loop” on page 8-44
- “Evaluate M-Book” on page 8-44
- “Group Cells” on page 8-44
- “Hide Cell Markers” on page 8-45
- “Notebook Options” on page 8-45
- “Purge Selected Output Cells” on page 8-45
- “Toggle Graph Output for Cell” on page 8-46
- “Undefine Cells” on page 8-46
- “Ungroup Cells” on page 8-47

### Bring MATLAB to Front

**Bring MATLAB to Front** brings the MATLAB Command Window to the foreground.

### Define Autoinit Cell

**Define AutoInit Cell** creates an autoinit cell by converting the current paragraph, selected text, or input cell. An autoinit cell is an input cell that is automatically evaluated whenever you open an M-book.

**Result.** If you select this feature while the cursor is in a paragraph of text, Notebook converts the entire paragraph to an autoinit cell. If you select this feature while text is selected, Notebook converts the text to an autoinit cell. If you select this feature while the cursor is in an input cell, Notebook converts the input cell to an autoinit cell.

**Format.** Notebook formats the autoinit cell using the AutoInit style, defined as bold, dark blue, 10-point Courier New.

**See Also.** For more information about autoinit cells, see “Defining Autoinit Input Cells for Notebook” on page 8-25.

### **Define Calc Zone**

**Define Calc Zone** defines the selected text, input cells, and output cells as a calc zone. A calc zone is a contiguous block of related text, input cells, and output cells that describes a specific operation or problem.

**Result.** Notebook defines a calc zone as a Word document section, placing section breaks before and after the calc zone. However, Word does not display section breaks at the beginning or end of a document.

**See Also.** For information about evaluating calc zones, see “Evaluating a Calc Zone with Notebook” on page 8-30. For more information about document sections, see the Microsoft Word documentation.

### **Define Input Cell**

**Define Input Cell** creates an input cell by converting the current paragraph, selected text, or autoinit cell. An input cell contains a MATLAB command.

**Result.** If you select this feature while the cursor is in a paragraph of text, Notebook converts the entire paragraph to an input cell. If you select this feature while text is selected, Notebook converts the text to an input cell.

If you select this feature while the cursor is in an autoinit cell, Notebook converts the autoinit cell to an input cell.

**Format.** Notebook encloses the text in cell markers and formats the cell using the Input style, defined as bold, dark green, 10-point Courier New.

**See Also.** For more information about creating input cells, see “Defining MATLAB Commands as Input Cells for Notebook” on page 8-23. For information about evaluating input cells, see “Evaluating MATLAB Commands with Notebook” on page 8-27.

## Evaluate Calc Zone

**Evaluate Calc Zone** sends the input cells in the current calc zone to MATLAB to be evaluated. A calc zone is a contiguous block of related text, input cells, and output cells that describes a specific operation or problem.

The current calc zone is the Word section that contains the cursor.

**Result.** As Notebook evaluates each input cell, it generates an output cell. When you evaluate an input cell for which there is no output cell, Notebook places the output cell immediately after the input cell that generated it. If you evaluate an input cell for which there is an output cell, Notebook replaces the results in the output cell wherever it is in the M-book.

**See Also.** For more information, see “Evaluating a Calc Zone with Notebook” on page 8-30.

## Evaluate Cell

**Evaluate Cell** sends the current input cell or cell group to MATLAB to be evaluated. An input cell contains a MATLAB command. A cell group is a single, multiline input cell that contains more than one MATLAB command. Notebook displays the output or an error message in an output cell.

**Result.** If you evaluate an input cell for which there is no output cell, Notebook places the output cell immediately after the input cell that generated it. If you evaluate an input cell for which there is an output cell, Notebook replaces the results in the output cell wherever it is in the M-book. If you evaluate a cell group, all output for the cell appears in a single output cell.

An input cell or cell group is the current input cell or cell group if

- The cursor is in the input cell or cell group.
- The cursor is at the end of the line that contains the closing cell marker for the input cell or cell group.
- The cursor is in the output cell for the input cell or cell group.
- The input cell or cell group is selected.

---

**Note** Evaluating a cell that involves a lengthy operation may cause a time-out. If this happens, Word displays a time-out message and asks whether you want to continue waiting for a response or terminate the request. If you choose to continue, Word resets the time-out value and continues waiting for a response. Word sets the time-out value; you cannot change it.

---

**See Also.** For more information, see “Evaluating MATLAB Commands with Notebook” on page 8-27. For information about evaluating the entire M-book, see “Evaluating an Entire M-Book” on page 8-30.

### **Evaluate Loop**

**Evaluate Loop** evaluates the selected input cells repeatedly.

For more information, see “Using a Loop to Evaluate Input Cells Repeatedly with Notebook” on page 8-31.

### **Evaluate M-Book**

**Evaluate M-book** evaluates the entire M-book, sending all input cells to MATLAB to be evaluated. Notebook begins at the top of the M-book regardless of the cursor position.

**Result.** As Notebook evaluates each input cell, it generates an output cell. When you evaluate an input cell for which there is no output cell, Notebook places the output cell immediately after the input cell that generated it. If you evaluate an input cell for which there is an output cell, Notebook replaces the results in the output cell wherever it is in the M-book.

**See Also.** For more information, see “Evaluating an Entire M-Book” on page 8-30.

### **Group Cells**

**Group Cells** converts the input cells in the selection into a single multiline input cell called a cell group. You evaluate a cell group using **Evaluate Cell**. When you evaluate a cell group, all of its output follows the group and appears in a single output cell.

**Result.** If you include text in the selection, Notebook moves it after the cell group. However, if text precedes the first input cell in the group, the text will remain before the group.

If you include output cells in the selection, Notebook deletes them. If you select all or part of an output cell before selecting this feature, Notebook includes its input cell in the cell group.

If the first line in the cell group is an autoinit cell, the entire group acts as a sequence of autoinit cells. Otherwise, the group acts as a sequence of input cells. You can convert an entire cell group to an autoinit cell by using **Define AutoInit Cell**.

**See Also.** For more information, see “Defining Cell Groups for Notebook” on page 8-23. For information about converting a cell group to individual input cells, see the description of the “Ungroup Cells” on page 8-47.

### **Hide Cell Markers**

**Hide Cell Markers** hides cell markers in the M-book.

When you select this feature, it changes to **Show Cell Markers**.

---

**Note** Notebook does not print cell markers whether you choose to hide them or show them on the screen.

---

### **Notebook Options**

**Notebook Options** allows you to examine and modify display options for numeric and graphic output.

**See Also.** See “Printing and Formatting an M-Book” on page 8-33 for more information.

### **Purge Selected Output Cells**

**Purge Selected Output Cells** deletes all output cells from the current selection.

**See Also.** For more information, see “Deleting Output Cells with Notebook” on page 8-32.

### **Toggle Graph Output for Cell**

**Toggle Graph Output for Cell** suppresses or allows graphic output from an input cell.

If an input or autoint cell generates figure output that you want to suppress, place the cursor in the input cell and choose this feature. The string (no graph) will be placed after the input cell to indicate that graph output for that cell will be suppressed.

To allow graphic output for that cell, place the cursor inside the input cell and choose **Toggle Graph Output for Cell** again. The (no graph) marker will be removed. This feature overrides the **Embed Graphic Output** in the M-book option, if that option is set in the **Notebook Options** dialog box.

**See Also.** See “Embedding Graphic Output in the M-Book” on page 8-36 and “Suppressing Graphic Output for Individual Input Cells in Notebook” on page 8-37 for more information.

### **Undefine Cells**

**Undefine Cells** converts the selected cells to text. If no cells are selected but the cursor is in a cell, Notebook undefines that cell. Notebook removes the cell markers and reformats the cell according to the Normal style.

If you undefine an input cell, Notebook automatically undefines its output cell. However, if you undefine an output cell, Notebook does not undefine its input cell. If you undefine an output cell containing an embedded graphic, the graphic remains in the M-book but is no longer associated with an input cell.

**See Also.** For information about the Normal style, see “Modifying Styles in the M-Book Template” on page 8-33. For information about deleting output cells, see the description of the “Purge Selected Output Cells” on page 8-45.

## Ungroup Cells

**Ungroup Cells** converts the current cell group into a sequence of individual input cells or autoinit cells. If the cell group is an input cell, Notebook converts the cell group to input cells. If the cell group is an autoinit cell, Notebook converts the cell group to autoinit cells. Notebook deletes the output cell for the cell group.

A cell group is the current cell group if

- The cursor is in the cell group.
- The cursor is at the end of a line that contains the closing cell marker for the cell group.
- The cursor is in the output cell for the cell group.
- The cell group is selected.

**See Also.** For information about creating cell groups, see the description of the “Defining Cell Groups for Notebook” on page 8-23.





# Source Control

---

Source Control Interface on PC  
Platforms (p. 9-2)

Select and view the source control system, add files, check files into and out of source control, undo a check-out, remove files, view file history, compare file versions, and more.

Source Control Interface on UNIX  
Platforms (p. 9-27)

Select and view the source control system, check files into and out of source control, and undo a check-out.

## Source Control Interface on PC Platforms

If you use a source control system (SCS) to manage your files, you can perform source control interface actions on M-files and Simulink and Stateflow® files within MATLAB, Simulink, and Stateflow. You can interface to your source control system by using menus from a graphical user interface (GUI), or by using functions from the MATLAB Command Window.

MATLAB, Simulink, and Stateflow do not perform source control functions, but only provide an interface to your own source control system. This means, for example, that you can open a file in the MATLAB Editor and modify it without checking it out. However, the file will remain read-only so that you cannot accidentally overwrite the source control version of the file.

The Source Control Interface works with any source control system that conforms to the Microsoft Common Source Control standard. Several vendors provide a Microsoft Source Code Control API wrapper for other source control systems.

---

**Note** For additional help on Command Window access to source control operations, enter `help verctrl` in the MATLAB Command Window.

---

- “Selecting and Viewing the Source Control System” on page 9-3
- “Adding Files to the Source Control System” on page 9-4
- “Checking Files Out of the Source Control System” on page 9-8
- “Checking Files Into the Source Control System” on page 9-11
- “Getting the Latest Version of Files from the Source Control System” on page 9-15
- “Undoing the Check-Out” on page 9-18
- “Removing Files from the Source Control System” on page 9-19
- “Showing File History” on page 9-20
- “Comparing the Working Copy of a File to the Latest Version in Source Control” on page 9-22
- “Displaying Source Control Properties of a File” on page 9-24
- “Starting the Source Control System Client” on page 9-26

## Selecting and Viewing the Source Control System


To select the source control system to interface, follow these steps:

- 1 From the MATLAB desktop, select **Preferences** from the **File** menu. You can also select this from Simulink and Stateflow model and library windows.

The **Preferences** dialog box opens.

- 2 Click the + for **General** and then select **Source Control**.

The currently selected system is shown. The list box will be populated by the systems installed in the machine that support the Microsoft Common Source Control standard. The default selection is None.

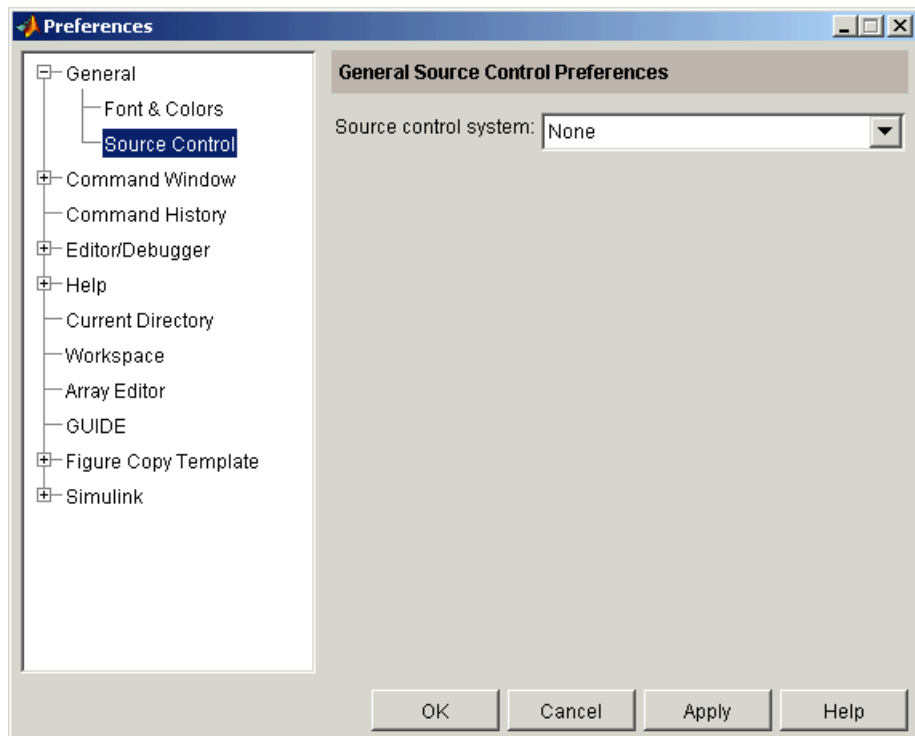

- 3 Select the system you want to use from the **Source control system** list.
- 4 Click **OK**.

### Function Alternative for Viewing the Source Control System

- 1 To view the currently selected system, type

```
cmopts
```

MATLAB displays the current source control system. For example:

```
ans =  
Microsoft Visual SourceSafe
```

- 2 To view all of the source control systems installed on your computer, type

```
list = verctrl ('all_systems')
```

MATLAB displays all the source control systems currently installed in your computer. For example:

```
list =  
  
'Microsoft Visual SourceSafe'  
  
'Jalindi Igloo'
```

### Adding Files to the Source Control System


You can add a single file or multiple files to the source control system. Note that the file is first added to the source control system using the **Add** command, not the **Check In** command.

#### Adding a Single File

To add a file to the source control system:

- 1 Select **Source Control -> Add to Source Control** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model.

The MATLAB **Add to source control** dialog box opens.

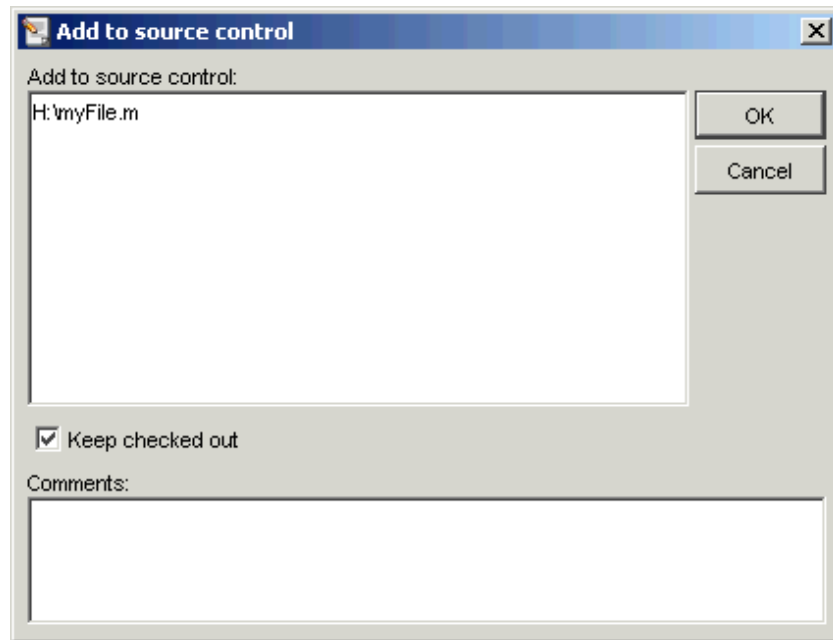

- 2 If you want to add the file to the source control system and keep it checked out so you can continue making changes, select **Keep checked out**. This is selected by default. If you have comments, type them in the **Comments** area.

Your comments will be submitted whether or not you select **Keep checked out**.

- 3 Click **OK**.


The file is added to the source control system. If you did not save the file before adding it to the source control system, you are prompted to save the files before adding them to your source control system.

If you did not keep the file checked out and you keep the file open, note that it is a read-only version.


## Adding Multiple Files

To add multiple files to the source control system:

- 1 Select the files in the MATLAB **Current Directory** window.

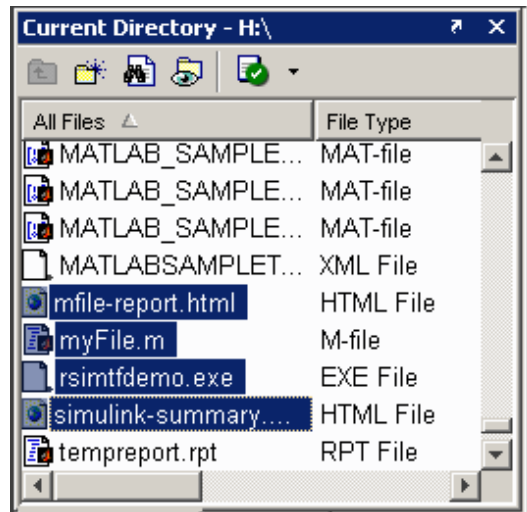

- 2 Right-click the selected files.
  - 3 Select **Source Control -> Add to Source Control** from the pop-up menu.
- The MATLAB **Add to source control** dialog box opens.

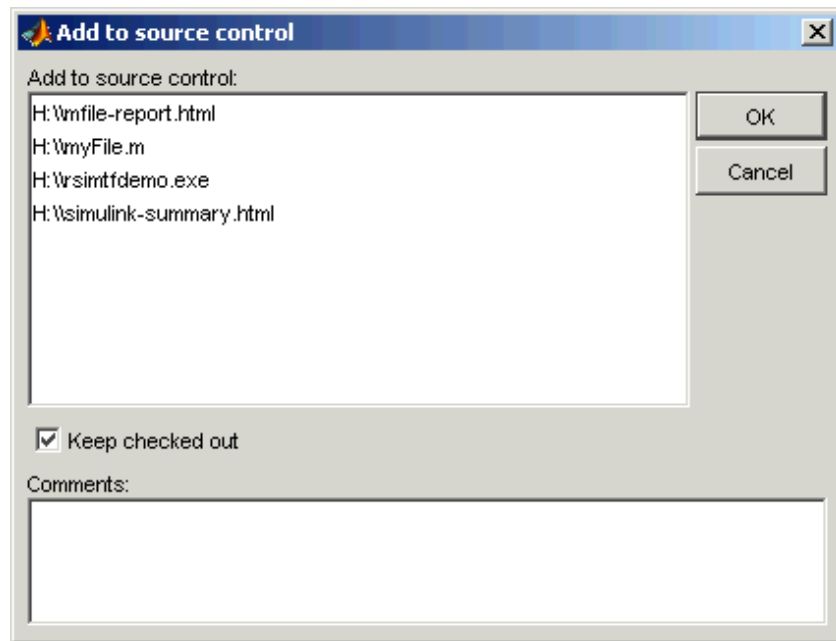

- 4 If you want to add the files to the source control system and keep them checked out so you can continue making changes, select **Keep checked out**. This is selected by default. If you have comments, type them in the **Comments** area.

Your comments will be submitted whether or not you select **Keep checked out**.

- 5 Click **OK**.

The files are added to the source control system. If you did not save the files before adding them to the source control system, they are automatically saved when they are added.

If you did not keep the files checked out and you keep the files open, note that they are read-only versions.

### Function Alternative for Adding File to Source Control

Use `add` as the first argument in the `verctrl` function to add a file to the source control system. Keep the following points in mind:

- Use the `comment` argument to store comments version of the file(s).
- The `verctrl` function with the `add` argument returns a logical 1 to the workspace if the file has changed on disk or a logical 0 to the workspace if the file has not changed on disk.
- You can add a single file or multiple files.

The `verctrl` function with the `add` argument takes this form.

```
fileChange=verctrl('add',{ 'H:\myFile.m', 'H:\rsimtfdemo.exe',  
 'H:\mfile-report.html', 'H:\simulink-summary.html' },  
 'comment', 0);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.

---

### Checking Files Out of the Source Control System

You can check out a single file or multiple files.


#### Checking Out a Single File

To check out a single file from the source control system,

- 1 Select **Source Control -> Check Out** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model.

The MATLAB **Check out file(s)** dialog box opens.



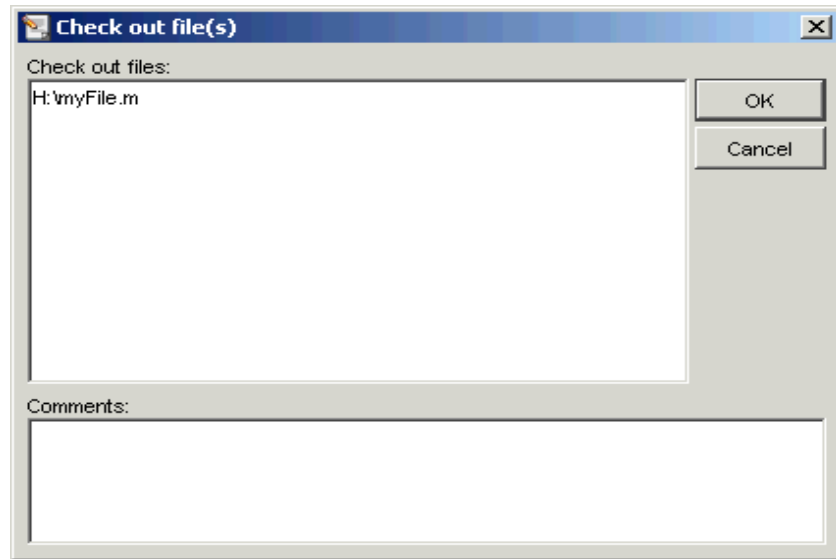

**2** Click **OK**.

The file is checked out from the source control system and is available to you for editing.

---

**Note** The **Comments** text area will not be included in the **Check out file(s)** dialog box if the source control system does not support “comments” on file check-out.



---

### Checking Out Multiple Files

To check out multiple files from the source control system,

- 1** Select the files in the MATLAB **Current Directory** window.
- 2** Right-click the selected files.
- 3** Select **Source Control -> Check Out** from the pop-up menu.

The MATLAB **Check out file(s)** dialog box opens.

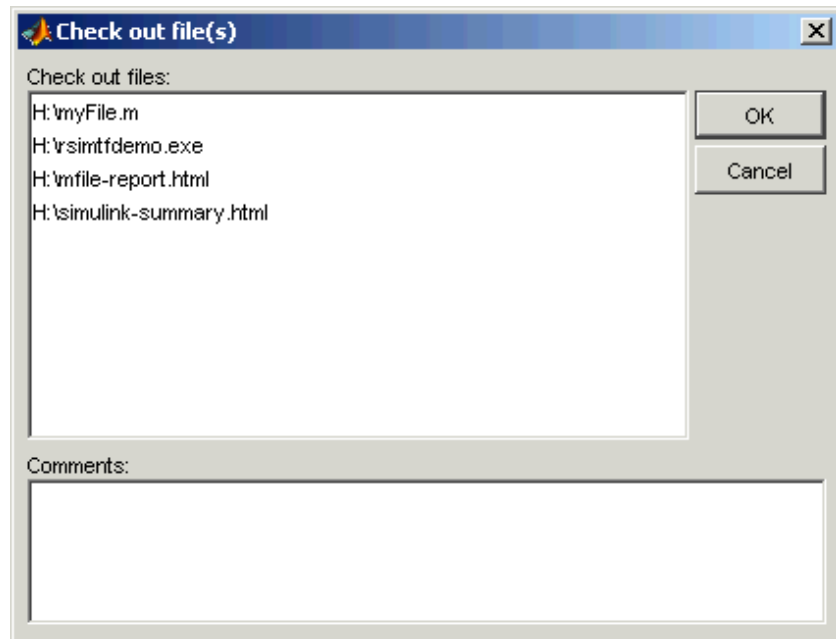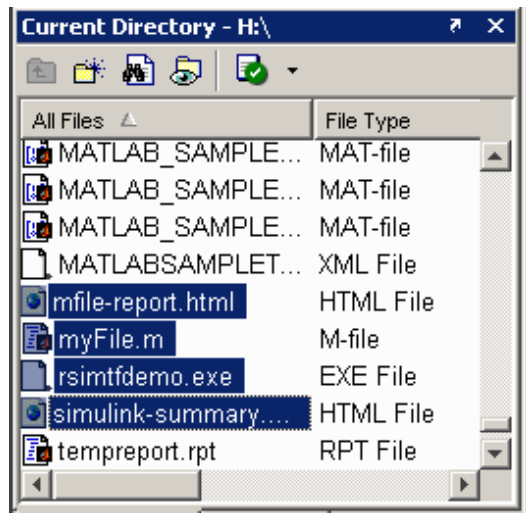

#### 4 Click **OK**.

The files are checked out from the source control system and are available to you for editing.

### Function Alternative for Checking Out Files

Use checkout as the first argument in the `verctrl` function to check a file out of the source control system. Keep the following points in mind:

- You can use the `comment` argument to store comments with this version of the file(s).
- The `verctrl` function with the `checkout` argument returns a logical 1 to the workspace if the file has changed on disk or a logical 0 to the workspace if the file has not changed on disk.
- You can check out a single file or multiple files.

The `verctrl` function with the `checkout` argument takes this form.

```
fileChange=verctrl('checkout',{ 'H:\myFile.m',  
    'H:\rsimtfdemo.exe', 'H:\mfile-report.html',  
    'H:\simulink-summary.html'}, 'comment', 0);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.

---

## Checking Files Into the Source Control System


You can check in one or more MATLAB M-files, Simulink models, or Stateflow models.

### Checking In a Single File

To check in a single file into the source control system:

- 1 Select **Source Control -> Check In** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model:

The MATLAB **Check in file(s)** dialog box opens.

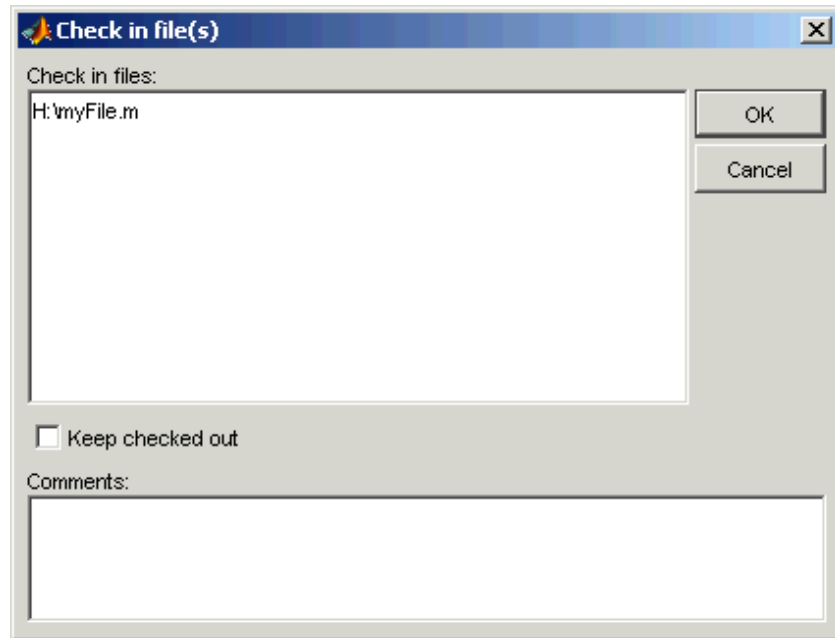

- 2 If you want to check in the file to the source control system and keep it checked out so you can continue making changes, select **Keep checked out**. If you have comments, type them in the **Comments** area.

Your comments will be submitted whether or not you select **Keep checked out**.

- 3 Click **OK**.


The file is checked into the source control system. If you did not save the file before checking it in, it is automatically saved when it is checked in.

If you did not keep the file checked out and you keep the file open, note that it is a read-only version.

### Checking In Multiple Files


To check in multiple files to the source control system,

- 1 Select the files in the MATLAB **Current Directory** window.

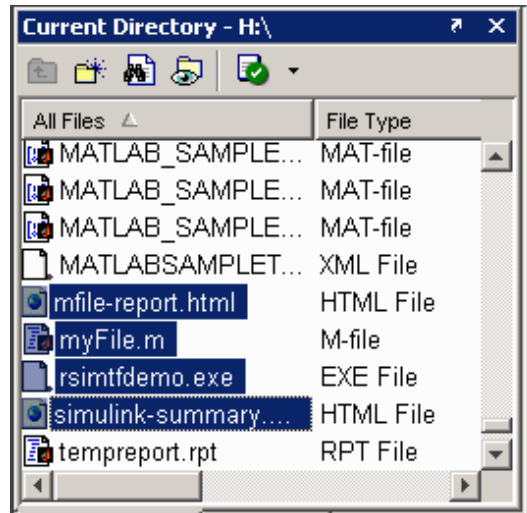

- 2 Right-click the selected files.
- 3 Select **Source Control -> Check In** from the pop-up menu.

The MATLAB **Check in file(s)** dialog box opens.

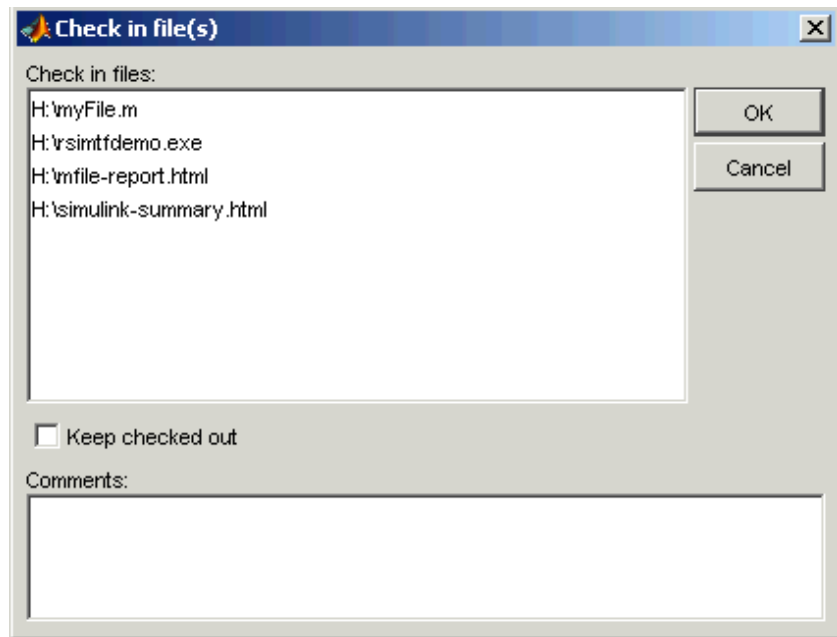

- 4 If you want to check in the files to the source control system and keep them checked out so you can continue making changes, select **Keep checked out**. If you have comments, type them in the **Comments** area.

Your comments will be submitted whether or not you select **Keep checked out**.

- 5 Click **OK**.

The files are checked into the source control system. If you did not save the files before checking them in, they are automatically saved when they are checked in.

If you did not keep the files checked out and you keep the files open, note that they are read-only versions.

## Function Alternative for Checking In Files

Use `checkin` as the first argument in the `verctrl` function to check files into the source control system. Keep the following points in mind:

- Use the `comment` argument to store comments with this version of the file(s).
- The `verctrl` function returns a logical 1 to the workspace if the file has changed on disk or a logical 0 to the workspace if the file has not changed on disk.
- You can check in a single file or multiple files.
- The files can be open or closed when you use `checkin`.

The `verctrl` function with the `checkin` argument takes this form.

```
fileChange = verctrl('checkin', {'H:\myFile.m',  
'H:\rsimtfdemo.exe', 'H:\mfile-report.html',  
'H:\simulink-summary.html'}, 'comment', 0);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.

---

## Getting the Latest Version of Files from the Source Control System


You can get the latest version of a file from the source control system for viewing and compiling, but not editing. You can get a single file, a single directory, multiple files, or multiple directories. The file or files will be tagged read-only. The list of files should contain either files or directories but not both.

### Getting the Latest Version of a Single File

To get the latest version of a single file:

- 1 Select **Source Control -> Get Latest Version** from the **File** menu in the MATLAB editor, Simulink model, or Stateflow model.

The MATLAB **Get latest version** dialog box opens.

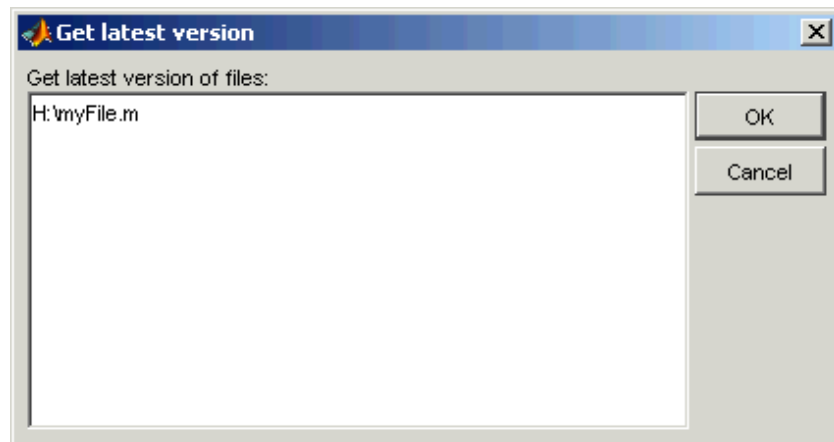


- 2 Click **OK**.

### Getting the Latest Versions of Multiple Files

To get the latest versions of multiple files:


- 1 Select the files in the **MATLAB Current Directory** window.

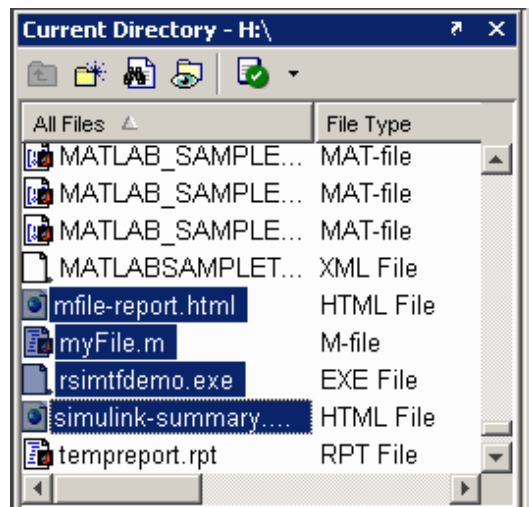



- 2 Right-click the selected files.
- 3 Select **Source Control -> Get Latest Version** from the pop-up menu.

The MATLAB **Get latest version** dialog box opens.

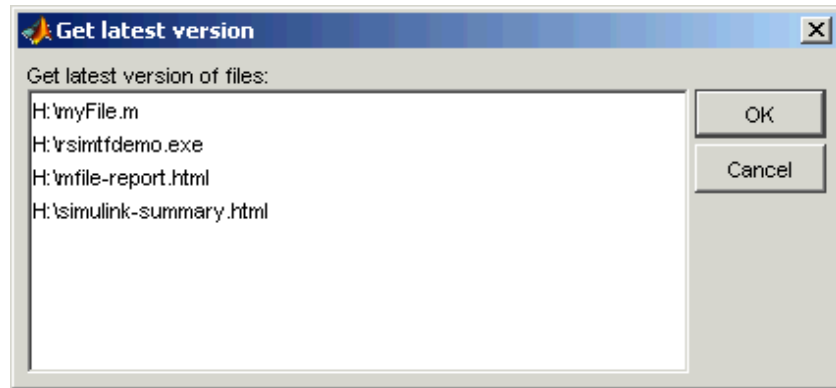

- 4 Click **OK**.

### Function Alternative for Getting Latest Version

Use `get` as the first argument in the `verctrl` function to get a file from the source control system. Keep the following points in mind:

- Note that the `verctrl` function with the `get` argument returns a logical 1 to the workspace if the file has changed on disk or a logical 0 to the workspace if the file has not changed on disk.
- You can get a single file or multiple files.

The `verctrl` function with the `get` argument takes this form.

```
fileChange=verctrl('get',{'H:\myFile.m', 'H:\rsimtdemo.exe',  
'H:\mfile-report.html', 'H:\simulink-summary.html'}, 0);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.

---

## Undoing the Check-Out

You can undo the check-out for a file. The file remains checked in, without any of the changes you made since you checked it out. You can undo the check-out of a single file or multiple files.


---

**Note** You will lose the changes you have made since you checked out the file. To save these changes when undoing the check-out, use the **Save As** item from the **File** menu.

---

- 1 Select **Source Control -> Undo Check-Out** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model.

The MATLAB **Undo check out** dialog box opens.

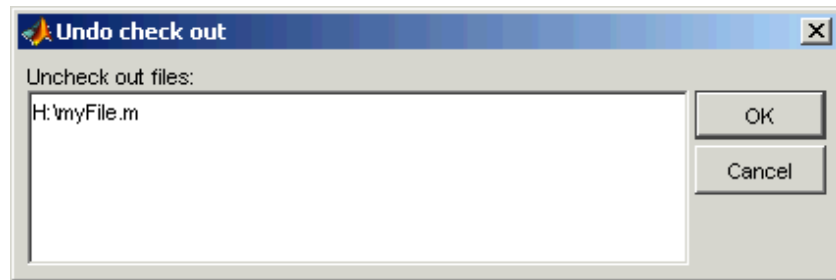

- 2 Click **OK**.

## Function Alternative for Undoing a Check-Out

Use the `uncheckout` as the first argument in the `verctrl` function to undo a check-out. Note that the `verctrl` function with the `uncheckout` argument returns a logical 1 to the workspace if the file has changed on disk or a logical 0 to the workspace if the file has not changed on disk.

The `verctrl` function with the `uncheckout` argument takes this form.

```
fileChange=verctrl('uncheckout',{ 'H:\myFile.m',  
    'H:\rsimtfdemo.exe', 'H:\mfile-report.html',  
    'H:\simulink-summary.html'}, 0);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.


---

## Removing Files from the Source Control System

You can remove a single file or multiple files from the source control system. To remove a file from the source control system:

- 1 Select **Source Control -> Remove from Source Control** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model.

The MATLAB **Remove from source control** dialog box opens.

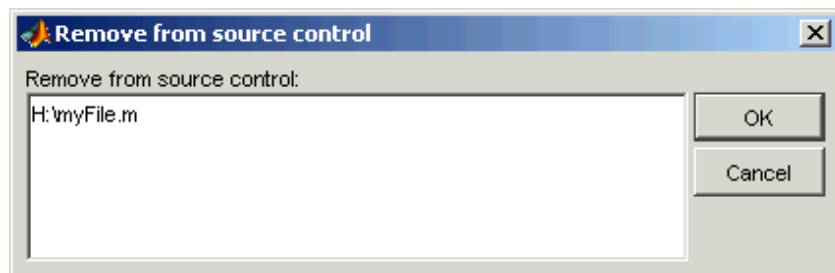

- 2 Click **OK**.

## Function Alternative for Removing File from Source Control

Use `remove` as the first argument in the `verctrl` function to remove a file or group of files from source control system. Note that the `verctrl` function with the `remove` argument does not return anything.

The `verctrl` function with the `remove` argument takes this form.

```
verctrl('remove',{ 'H:\myFile.m', 'H:\rsimtfdemo.exe',  
                  'H:\mfile-report.html', 'H:\simulink-summary.html'}, 0);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.


---

## Showing File History

You can show the history of a single file or multiple files in the source control system. To show the history of a file,


- 1 Select **Source Control -> Show History** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model.

The dialog boxes returned are specific to the source control system being used. For example, if Microsoft Visual SourceSafe is the currently selected source control system, then the **History Options** dialog box is returned.

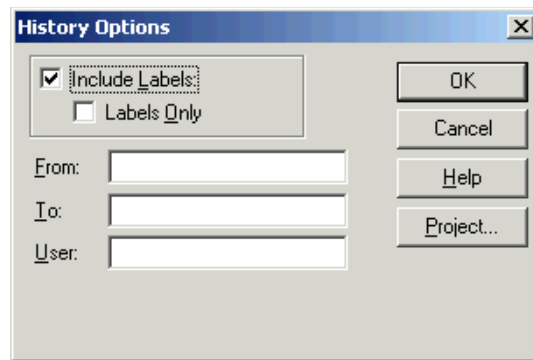

- 2 Enter the appropriate label, date, and user information and click **OK**.

The Microsoft Visual SourceSafe **History** dialog box opens.

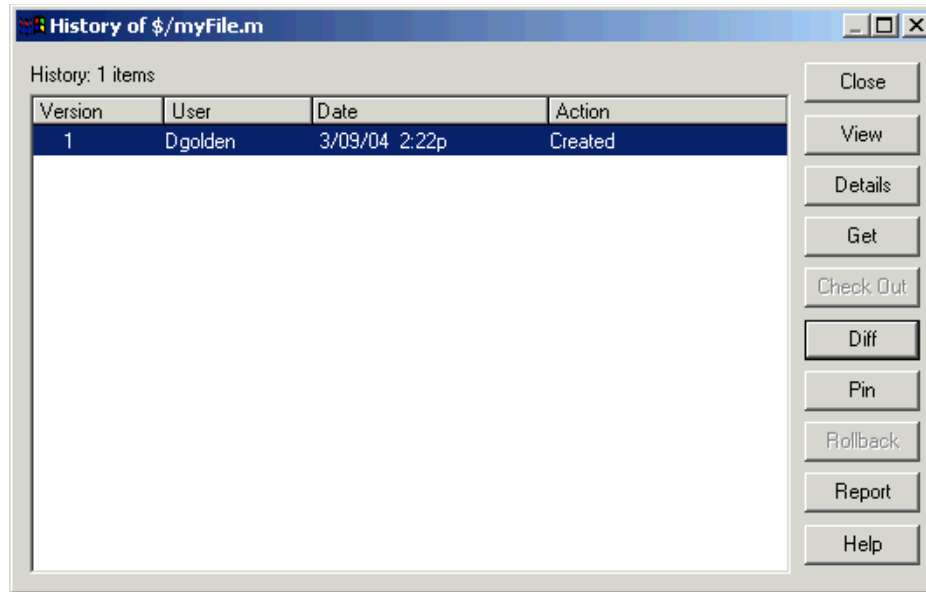

### Function Alternative for Showing File History

Use `history` as the first argument in the `verctrl` function to show the history of the file in the source control system. Note that the `verctrl` function with the `history` argument returns a logical 1 to the workspace if the file has changed on disk or a logical 0 to the workspace if the file has not changed on disk.

The `verctrl` function with the `history` argument takes this form.

```
fileChange=verctrl('history',{ 'D:\file1.ext', 'D:\file2.ext' },
0);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.

---

## Comparing the Working Copy of a File to the Latest Version in Source Control


You can use the **Differences** option to compare the current working copy of a file on disk with the latest checked-in version of the file in the source control system. Note that you can only show differences on one file at a time, not multiple files.

### Comparing M-Files

To show differences of an M-file:


- 1 Select **Source Control -> Differences** from the **File** menu in the MATLAB Editor.

A dialog box from the currently selected source control system opens. For example, if Microsoft Visual SourceSafe is the currently selected source control system, then the **Difference Options** dialog box opens.

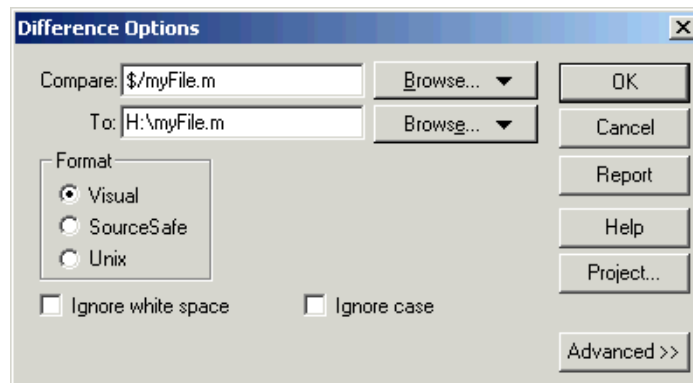

- 2 Click **OK**.

The Microsoft Visual SourceSafe **Differences** dialog box opens. This compares the working copy of the file to the latest checked-in version of the file.

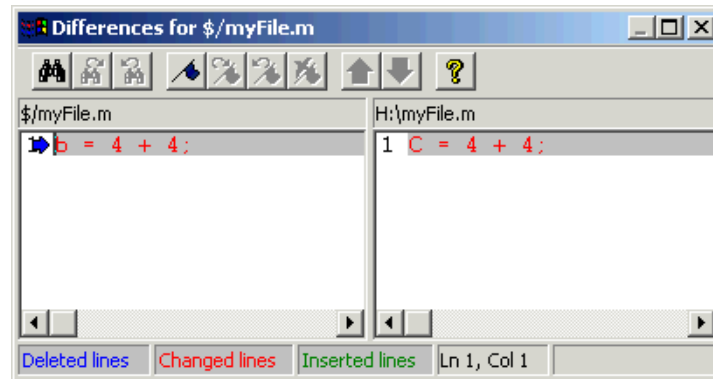

### Function Alternative for Showing File Differences

Use `isdiff` as the first argument in the `verctrl` function to return a Boolean value to the window, which indicates whether or not there are any differences between the current file on disk and the latest checked-in version of the file.

The `verctrl` function with the `isdiff` argument takes this form.

```
fileChange = verctrl('isdiff', 'H:\myFile.m', 0)
```

This will return the following in the Command Window if the two copies of the file are different:

```
fileChange =  
  
1
```

Use `showdiff` as the first argument in the `verctrl` function to show the differences between the disk copy of a file and the latest checked-in version in the source control system. Note that the `verctrl` function with the `showdiff` argument does not return anything.

The `verctrl` function with the `showdiff` argument takes this form.

```
verctrl('showdiff', 'D:\file.ext', handle);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.

---


### Displaying Source Control Properties of a File

You can display the properties of a single file from the source control system. Note that you cannot display the properties of multiple files. To display the properties of a file,

- 1 Select **Source Control -> Show Properties** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model.

A dialog box from the source control system being used opens. Below is a Microsoft Visual SourceSafe properties dialog box.



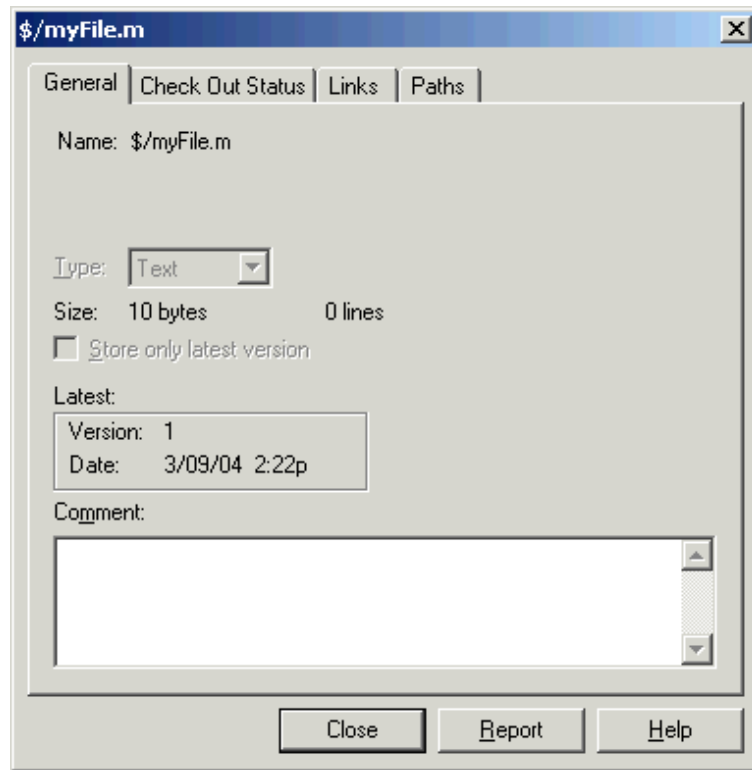

### Function Alternative for Displaying File Properties

Use properties as the first argument in the `verctrl` function to display the properties of a file. Note that the `verctrl` function with the properties argument returns a logical 1 to the workspace if the file has changed on disk or a logical 0 to the workspace if the file has not changed on disk.

The `verctrl` function with the properties argument takes this form.


```
fileChange=verctrl('properties','D:\file.ext');
```

## Starting the Source Control System Client

To start the source control system:

- 1 Select **Source Control -> Start Source Control** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model.

The dialog box from the currently selected source control system opens. Below is the Microsoft **Visual SourceSafe Explorer** dialog box.

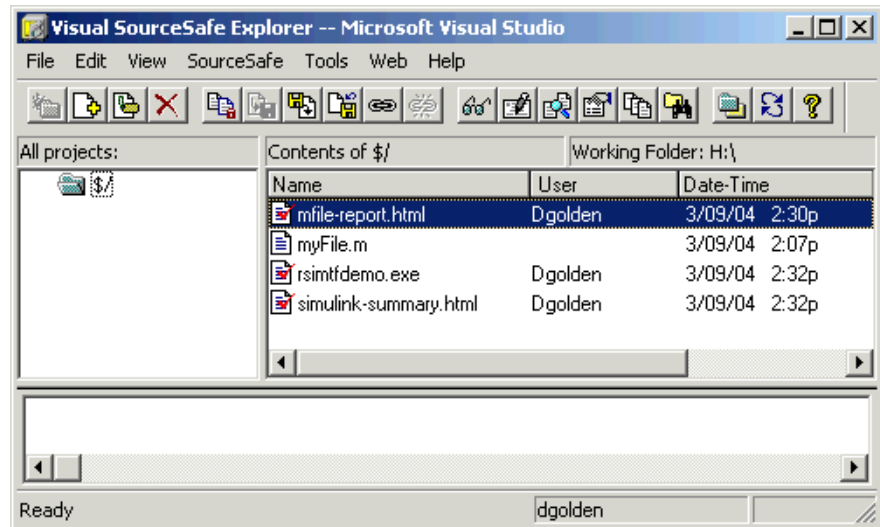

### Function Alternative for Starting the Source Control Client

Use `runsc` as the first argument in the `verctrl` function to start the currently selected source control system. The `verctrl` function with the `runsc` argument takes this form.

```
verctrl('runsc', 0);
```

---

**Note** To use the `verctrl` command, you can create a Windows handle or use 0. For more information about creating handles, enter `doc verctrl` in the MATLAB Command Window.

---

## Source Control Interface on UNIX Platforms

If you use a source control system (SCS) to manage your files, you can check M-files and Simulink and Stateflow files into and out of the source control system from within MATLAB, Simulink, and Stateflow.

MATLAB, Simulink, and Stateflow do not perform source control functions, but only provide an interface to your own source control system. This means, for example, that you can open a file in the MATLAB Editor and modify it without checking it out. However, the file will remain read-only so that you cannot accidentally overwrite the source control version of the file.

The Source Control Interface supports four popular source control systems, as well as a custom option:

- ClearCase from Rational Software
- CM Synergy from Telelogic
- PVCS Version Manager from Merant
- Revision Control System (RCS)
- Custom option — Allows you to build your own interface if you use a different source control system

You can interface to your source control system by using menus from a graphical user interface (GUI), or by using functions from the Command Window. There are some options you can perform using the MATLAB functions that are not available with the GUIs — these are noted in the instructions.

- “Selecting and Viewing the Source Control System” on page 9-27
- “Checking Files Into the Source Control System” on page 9-29
- “Checking Files Out of the Source Control System” on page 9-31
- “Undoing the Check-Out” on page 9-32

### Selecting and Viewing the Source Control System


Specify the source control system using these steps:

- 1 Select **Preferences** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model.

The **Preferences** dialog box opens.

- 2 Click the + for **General** and then select **Source Control**.

The currently selected system is shown. The default selection is None.

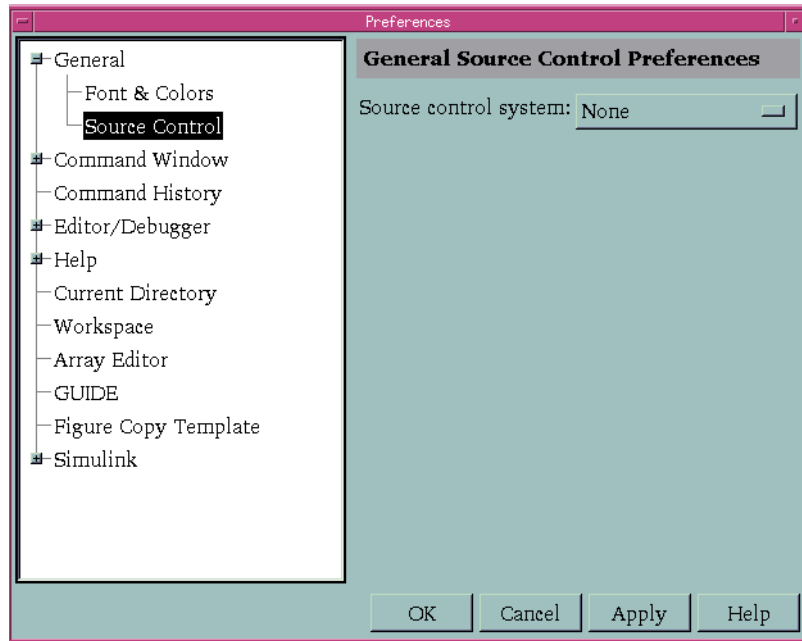

- 3 Select the system you want to use from the **Source control system** list.

### Function Alternative for Viewing the Source Control System

To view the currently selected system, type `cmopts` in the Command Window. MATLAB displays the current source control system. For example:

```
ans =  
  
PVCS Source Control
```

## Setting a View and Checking Out a Directory – For ClearCase on UNIX Only

If you use ClearCase on a UNIX platform, do the following using ClearCase:


- 1 Set a view.
- 2 Check out the directory that you want to save files in, check files into, or check files out of.

You can now use the MATLAB, Simulink, or Stateflow interfaces to ClearCase to check files into and out of the directory that you checked out in step 2.

## Checking Files Into the Source Control System

After creating or editing a file in the MATLAB Editor, Simulink, or Stateflow, save it, and then check in the file by following these steps:

- 1 Select **Source Control -> Check In** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model. The **Check In** dialog box opens.

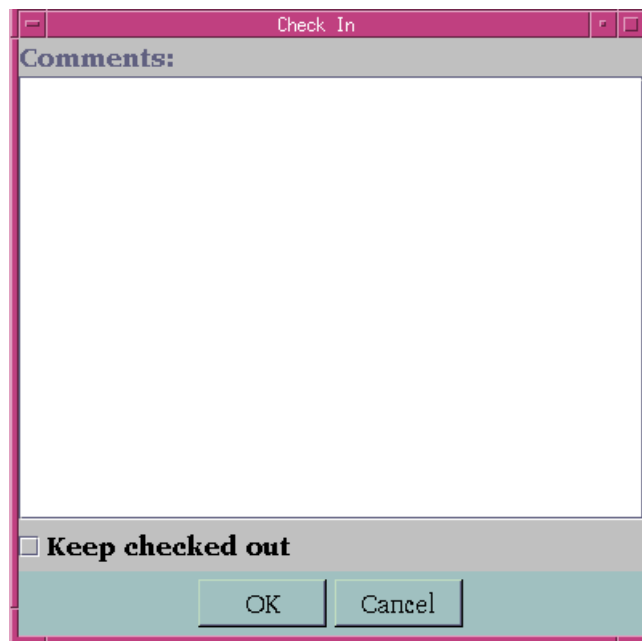

- 2 If you want to check in the file but keep it checked out so you can continue making changes, select **Keep checked out**. If you have comments, type them in the **Comments** area.

Your comments will be submitted whether or not you select **Keep checked out**.

- 3 Click **OK**.

The file is checked into the source control system. If you did not save the file before checking it in, it is automatically saved when it is checked in.

If you did not keep the file checked out and you keep the file open, note that it is a read-only version.

### Function Alternative for Checking In Files

Use `checkin` to check files into the source control system. The files can be open or closed when you use `checkin`. The `checkin` function takes this form.

```
checkin({'D:\file1.ext', 'D:\file2.ext'}, 'comments', 'string', ...  
        'option', 'value')
```

For `file`, use the complete path. You must supply the **comments** argument and a comments string with `checkin`.

Use the `option` argument to

- Check in a file and keep it checked out — set the `lock` option to `on`.
- Check in a file even though it has not changed since the previous check in — set the `force` option to `on`.

The **comments** argument and the `lock` and `force` options apply to all files checked in.

After checking in the file, if you did not keep it checked out and have it open, note that it is a read-only version.

### Example—Check In a File with Comments

To check in the file `clock.m` with a comment `Adjustment for Y2K`, type

```
checkin('\matlabr12\myfiles\clock.m','comments','Adjustment ...  
for Y2K')
```

For other examples, see the reference page for `checkin`.


## Checking Files Out of the Source Control System

To check files out of the source control system using MATLAB, follow these steps:

- 1 Open the M-file, Simulink file, or Stateflow file you want to check out.

The file opens and the title bar indicates it is read-only.

- 2 Select **Source Control -> Check Out** from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model. The **Check Out** dialog box opens

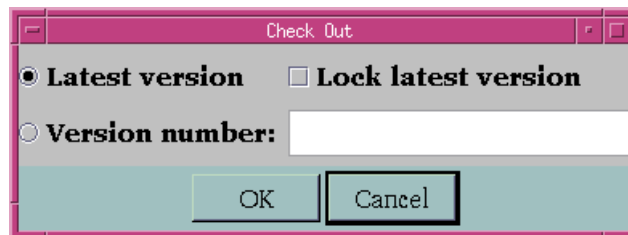

- 3 To check out the version that was most recently checked in, select the **Latest version** option. To check out a specific version of the file, select the **Version number** option and type the version number in the field.

To prevent others from checking out the file while you have it checked out, select **Lock latest version**. To check out a read-only version of the file, clear **Lock latest version**.

#### 4 Click **OK**.

The file is checked out from the source control system and is available to you for editing.

#### **Function Alternative for Checking Out Files**

Use `checkout` to check a file out of the source control system. You can check out multiple files at once and specify check-out options. The `checkout` function takes this form.

```
checkout({'D:\file1.ext', 'D:\file2.ext'}, 'option', 'value')
```

For `file`, use the complete path.

Use the `option` argument to

- Check out a read-only version of the file — set the `lock` option to `off`.
- Check out the file even if you already have it checked out — set the `force` option to `on`.
- Check out a specific version of the file — use the `revision` option, and assign the version number to the `value` argument.

The options apply to all files checked out. The file can be open or closed when you use `checkout`.

#### **Example — Check Out a Specific Version of a File**

To check out the 1.1 version of the file `clock.m`, type

```
checkout('\matlab\myfiles\clock.m', 'revision', '1.1')
```

For other examples, see the reference page for `checkout`.

## **Undoing the Check-Out**

You can undo the check-out for a file. The files remain checked in, without any of the changes you made since you checked them out. Select **Source Control -> Undo Check-Out**. from the **File** menu in the MATLAB Editor, Simulink model, or Stateflow model. There is no return dialog.

If you want to keep a local copy of your changes, use the **Save As** item from the **File** menu.



### Function Alternative for Undoing a Check-Out

The `undocheckout` function takes this form.

```
undocheckout({'D:\file1.ext','D:\file2.ext'})
```

Use the complete path for `file`. For example, to undo the check-out for the files `clock.m` and `calendar.m`, type

```
undocheckout({'\matlab\myfiles\clock.m',...  
'\matlab\myfiles\calendar.m'})
```



## Symbols

- ! function 3-6
- %
  - comment symbol 6-14
  - create comment 6-15
- %% 6-64
- , after functions 3-18
- ... in statements 3-11
- ; after functions 3-18
- >> prompt in Command Window 3-2
- {%
  - block comment symbol 6-15

## A

- accelerators, keyboard 2-35
- add 9-8
- adding file to source control system on PC
  - platforms 9-4
- addpath 5-23
- Array Editor 5-10
  - preferences 5-16
- arrays
  - editing 5-10
  - workspace 5-2
- arrow keys
  - Command Window usage 3-16
  - Editor 6-21
- ASCII files
  - viewing contents of 5-38
- asv 6-30
- autocode 6-2
- autoinit cells
  - converting input cells to 8-41
  - converting to input cells 8-42
  - defining 8-25
- AutoInit style
  - definition of 8-34

- automatic code generation 6-2
- automatic completion of statement 3-12
- automation startup option (automation server)
  - 1-6
- autosave 6-30

## B

- backup
  - Editor autosave 6-30
- bang (!) function 3-6
- base workspace 5-8
- batch mode for starting MATLAB 1-6
- batch mode for starting MATLAB (UNIX) 1-10
- blank spaces in MATLAB commands 3-8
- block comments 6-15
  - extending 6-16
- bookmarks
  - in files in Editor 6-22
  - in Help browser 4-18
- Boolean searching in Help browser 4-15
- breaking long lines 3-11
- breakpoints
  - clearing (removing) 6-52
  - clearing, automatically 6-53
  - conditional 6-58
  - disabling and enabling 6-52
  - running file 6-43
  - setting 6-40, 6-41
  - types 6-40
- Bring MATLAB to Front 8-41
- browser
  - Web, in MATLAB 2-29
- bugs, reporting to The MathWorks 4-38
- built-in editor 6-4

**C**

## C/C++

- editing files in Editor 6-12

## caching

- M-files 6-30
- search path 5-25

## calc zones

- defining 8-25
- ensuring workspace consistency in M-books 8-22
- evaluating 8-30
- output from 8-30

## callbacks

- in shortcuts 2-21

## calling from MATLAB 3-6

## capitalization in MATLAB 3-8

## case sensitivity in MATLAB 3-8

## cell groups

- converting to input cells 8-47
- creating 8-24
- definition of 8-23
- evaluating 8-28
- output from 8-28

## cell markers

- defined 8-23
- hiding 8-45
- printing 8-33

## cell mode 6-63

## cell scripts 6-63

## cells

- beep 6-70
- defining in M-files 6-64
- evaluating 6-69
- removing 6-68

## cells in M-File Editor 6-63

## character set

- preference for MAT-files 2-56

## checkin

- on PC platforms 9-15
- on UNIX platforms 9-30

## checking in files

- on PC platforms 9-11
- on UNIX platforms 9-29

## checking out files

- on PC platforms 9-8
- on UNIX platforms 9-31
- undoing on PC platforms 9-18
- undoing on UNIX platforms 9-32

## checkout

- on PC platforms 9-11
- on UNIX platforms 9-32

## clc 3-20

## clear 5-7

## ClearCase source control system

- configuring on UNIX platforms 9-29

## clearing

- Command Window 3-20

## clicking on multiple items 2-38

## clipboard 2-39

## closing

- desktop tools 2-6
- MATLAB 1-13
- M-files 6-32

## cmopts

- on PC platforms 9-4
- on UNIX platforms 9-28

## code examples 6-2

## code iteration 6-63

## code resources 6-2

## code samples

- sample code 6-2

## Collatz problem 6-36

- color
  - general preferences 2-52
  - indicators for syntax 3-9
  - modes for printing M-books 8-38
  - printing M-book 8-33
- colors
  - in M-files 6-19
  - preferences in MATLAB 2-50
- column numbers 6-20
- COM
  - entries for MATLAB 1-6
  - startup options for MATLAB 1-6
- command flags 1-4
- Command History
  - about 3-30
  - deleting entries in 3-35
  - file 3-31
  - preferences 3-37
  - printing 3-35
  - running functions from 3-32
- command line
  - defined 3-2
  - editing 3-10
- command name
  - automatic completion 3-12
- command switches 1-4
- Command Window
  - bringing to front in Notebook 8-41
  - clearing 3-20
  - editing in 3-10
  - help 4-3
  - paging of output in 3-18
  - preferences 3-27
  - printing contents of 3-20
  - prompt 3-2
  - width 3-28
- Command Window scroll buffer 3-28
- commands
  - executing a group of 2-21
  - on multiple lines 3-11
  - to operating system 3-6
- comments
  - adding/removing with any text editor 6-15
  - adding/removing with Editor 6-14
  - block 6-15
  - color indicators 2-52
  - creating in Editor 6-14
  - multiline statements 6-17
  - purpose 6-14
  - using ... (ellipsis) 6-17
  - within a line 6-17
- `comp.soft-sys.matlab` 4-39
- comparing working copy to source control version
  - on PC platforms 9-22
- completing statements automatically 3-12
- compression
  - MAT-files 2-56
- conditional breakpoints 6-58
- configuration management
  - See* source control system interface on PC
    - platforms or source control system
    - interface on UNIX platforms
- configuration, desktop 2-5
- configuring Notebook 8-39
- console mode 3-28
- content of M-files, searching 5-40
- Contents in Help browser
  - synchronizing preference 4-28
- Contents tab in Help browser
  - description 4-7
  - synchronizing with display 4-9
- context menus 2-31
- continuing long statements 3-11

- control keys
  - editing commands 3-16
  - Editor 6-21
- conversion
  - Word document to M-book 8-21
- cropping graphics
  - in M-books 8-38
- cssm 4-39
- current directory
  - at startup for MATLAB 1-3
  - changing 5-32
  - contents of 5-32
  - field in toolbar 5-30
  - relevance to MATLAB 5-29
  - tool 5-30
- Current Directory browser 5-30
  - preferences 5-42
  
- D**
- data consistency
  - calc zones in M-books 8-22
  - evaluating M-books 8-22
  - in M-book 8-22
- datatips 6-31
  - example 6-47
- dbclear 6-53
- dbstop
  - example 6-43
- Debugger 6-1
- debugger
  - option for UNIX 1-8
- debugging
  - ending 6-51
  - example 6-36
  - features 6-39
  - M-files 6-33
    - options 6-4
  - Notebook 8-22
  - prompt 6-44
  - stepping 6-45
  - techniques 6-33
- decimal places in output 3-19
- defaults
  - preferences for MATLAB 2-44
  - setting in startup file for MATLAB 1-4
- Define Autoinit Cell 8-41
- Define Calc Zone 8-42
- Define Input Cell 8-42
- delete 5-35
- delete function
  - preference for recycling 2-55
- deleting
  - files 5-35
- deleting files 2-55
- desktop
  - color preferences 2-50
  - configuration 2-5
  - description 2-2
  - font preferences for 2-44
  - starting without 1-9
  - tools
    - closing 2-6
    - opening 2-4
  - windows
    - closing 2-6
    - opening 2-4
- development environment for MATLAB 2-2
- diary 3-21
- dir 5-32

- directories
    - copying 5-36
    - creating 5-34
    - deleting 5-35
    - MATLAB
      - caching 6-30
      - renaming 5-35
      - searching contents of 5-30
      - See also* current directory, search path
  - disabling
    - breakpoints 6-52
  - display pane in Help browser 4-19
  - displaying
    - output 3-18
  - displaying source control properties of a file 9-24
  - dividers for cells 6-64
  - documentation
    - printing 4-30
    - problems, reporting 4-40
    - viewing 4-19
  - dots (...) 3-11
  - downloading
    - M-files 4-38
  - dragging in the desktop 2-39
- E**
- edit
    - creating new M-file in Editor 6-8
  - editing
    - in Command Window 3-10
    - M-files 6-1
      - outside of MATLAB 6-4
      - without running MATLAB 6-10
  - Editor
    - arranging documents 6-10
    - closing files 6-32
    - go to
      - bookmark 6-22
      - function 6-23
      - line number 6-22
    - modifying values 6-69
    - navigation keys 6-21
    - opening files 6-8
    - other text files 6-12
    - rule displayed 6-20
    - status bar
      - function 6-20
    - viewing values 6-31
  - editor
    - built-in 6-4
  - Editor, stand-alone (Windows) 6-10
  - Editor/Debugger 6-1
    - closing 6-12
    - description 6-6
    - example 6-36
    - indenting 6-6
    - preferences 6-11
  - EDU>> prompt in Command Window 3-2
  - ellipses (...) in statements 3-11
  - Emacs key bindings in Editor 6-21
  - Embed Figures in M-book 8-36
  - embedding graphics
    - in M-book 8-36
  - encoding
    - preference when saving 2-56
  - ending MATLAB 1-13
  - environment settings at startup 1-4
  - error breakpoints
    - stop for errors 6-60
  - error message identifiers 6-62
  - error messages
    - in Command Window 3-4

- error style
  - definition 8-34
- errors
  - color indicators 2-52
  - finding in M-files 6-33
  - run-time 6-33
  - syntax 6-33
- Evaluate Calc Zone 8-43
- Evaluate Cell 8-43
- Evaluate Loop 8-44
- Evaluate Loop dialog box 8-31
- Evaluate M-Book 8-44
- evaluating
  - M-books, ensuring data consistency 8-22
  - selection in Command History 3-32
  - selection in Command Window 3-6
- evaluating sections of M-file 6-69
- example code 6-2
- examples
  - in documentation, index of 4-8
  - running from Help browser 4-22
- exe 3-6
- executables
  - running from MATLAB 3-6
- executing
  - group of statements 2-21
  - M-files in Editor 6-31
- existing code 6-2
- exit
  - confirmation 1-13
- exiting MATLAB 1-13
- ext startup option 1-8
  
- F**
- f* button 6-23
- F Inc Search field 6-25
  
- favorites in Help browser 4-18
- feedback to The MathWorks 4-40
- file exchange
  - for M-files 4-38
- file management system
  - See* source control system interface on PC platforms or source control system interface on UNIX platforms
- filebrowser 5-30
- files
  - contents, viewing 5-38
  - copying 5-36
  - creating in the Current Directory browser 5-34
  - deleting 5-35
  - editing M-files 6-6
  - log 1-6
  - MATLAB related, listing 5-32
  - naming 5-19
  - opening 5-37
  - operations in MATLAB 5-29
  - renaming 5-35
  - running 5-39
  - source control on PC platforms 9-2
  - source control on UNIX platforms 9-27
  - viewing contents of 5-38
- Find Files dialog box 5-40
- finding
  - files using Current Directory browser 5-40
  - M-files 5-40
  - string in M-files 5-40
  - text in Command History 3-34
  - text in Command Window 3-22
  - text in current file 6-23
  - text in M-files 6-24
  - text in page of Help browser 4-21
- finish.m file running when quitting 1-13
- firewall 2-31



- flags
  - for startup 1-4
- folders. *See* directories
- font
  - Help browser 4-29
  - Help browser display pane 4-29
  - Help Navigator 4-29
  - preferences in MATLAB 2-44
- format
  - controlling numeric format in M-book 8-35
  - preferences 3-28
- format 3-19
  - in M-book 8-35
- function name
  - automatic completion 3-12
- function workspace 5-8
- functions
  - color indicators 2-52
  - executing a group of 2-21
  - help for 4-32
    - reference page 4-2
  - long (on multiple lines) 3-11
  - multiple in one line 3-11
  - naming 5-19
- G**
- get 9-17
- get latest version of file on PC platforms 9-15
- graphical debugger 6-1
- graphics
  - controlling output in M-book 8-37
  - embedding in M-book 8-36
  - in M-books 8-35
- graphing
  - variables from the Workspace browser 5-8
- gray breakpoint icons 6-42
- Group Cells 8-44
- H**
- help
  - functions 4-32
    - in Command Window 4-34
    - M-file 4-3
  - help 4-34
  - Help browser
    - contents listing 4-7
    - copying information from 4-22
    - display pane 4-19
    - font preferences 4-29
    - index 4-10
    - navigating 4-20
    - printing help 4-30
    - running examples from 4-22
    - searching 4-12
  - Help Navigator 4-5
  - helpbrowser 4-4
  - Hide Cell Markers 8-45
  - highlighted search terms 4-13
  - history
    - automatic log file 1-6
    - source control on PC platforms 9-20
  - history 9-21
  - history of statements 3-30
  - history.m file 3-31
  - home 3-20
  - HTML
    - editing files in Editor 6-12
    - source, viewing in Help browser 4-22
  - HTML viewer in MATLAB 2-29

**I**

- incremental searching
  - in Editor 6-25
- indenting
  - in Command Window 3-9
  - in Editor 6-19
  - nested functions 6-20
- index
  - examples in documentation 4-8
  - Help browser 4-10
    - results 4-11
    - tips 4-11
- initiation (init) file for MATLAB 1-4
- input
  - to MATLAB in Command Window 3-2
- input cells
  - controlling evaluation 8-30
  - controlling graphic output 8-37
  - converting autoinit cell to 8-42
  - converting text to 8-42
  - converting to autoinit cell 8-41
  - converting to cell groups 8-47
  - converting to text 8-26
  - defining in M-books 8-23
  - evaluating 8-27
  - evaluating cell groups 8-28
  - evaluating in loop 8-31
  - maintaining consistency 8-22
  - timing out during evaluation 8-44
  - use of Word Normal style 8-26
- Input style
  - definition of 8-34
- Internet proxy server 2-31
- interrupting a running program 3-5
- invalid breakpoints 6-42
- isdiff 9-23
- iterative programming 6-63

**J**

- Java
  - editing files in Editor 6-12
- Java VM
  - starting without 1-10

**K**

- K>> prompt
  - debugging mode 6-44
  - keyboard statement 6-35
- K>> prompt in Command Window 3-2
- keyboard 6-35
- keyboard shortcuts and accelerators 2-35
- keys
  - editing in Command Window 3-16
  - Editor 6-21
- keyword
  - color indicator 2-53
- keywords
  - color indicators 2-52
  - in documentation 4-10

**L**

- license information 4-40
- line
  - in Editor 6-20
- line breaks
  - adding for long statements 3-11
- line numbers 6-20
  - going to 6-22
- line wrapping 3-28
- links
  - in Help browser 4-21
- load 5-6
- locking files 9-31

- log
    - automatic 1-6
    - file 1-6
    - session 3-21
    - statements 3-30
  - logfile startup option 1-6
  - long lines 3-11
  - lookfor 5-42
  - looping
    - to evaluate input cells 8-31
  - lowercase usage in MATLAB 3-8
- M**
- MAT-files
    - compatibility 2-56
    - compression preference 2-56
    - creating 5-4
    - defined 5-4
    - loading 5-6
    - preferences 2-56
  - Mathtools.net 4-39
  - MATLAB
    - commands, executing in a Word document 8-27
    - files, listing 5-32
    - path 5-18
    - quitting 1-13
  - matlab.mat 5-6
  - matlabrc.m, startup file 1-4
  - matrices
    - editing 5-10
  - M-books
    - creating 8-18
    - data consistency 8-22
    - data integrity 8-22
    - entering text and commands 8-21
    - evaluating all input cells 8-30
    - modifying style template 8-33
    - opening 8-20
    - printing 8-33
    - sizing graphic output 8-37
    - styles 8-33
  - measuring performance of M-files 7-35
  - meditor, stand-alone MATLAB editor 6-10
  - membership Web page 2-42
  - message identifiers 6-62
  - M-file
    - navigating 6-21
  - M-file help 4-3
    - viewing in Current Directory browser 5-39
  - M-files
    - appearance 6-19
    - automatic saving 6-30
    - colors in 6-19
    - content, viewing 5-38
    - creating 6-4
      - from Command History 3-33
      - in MATLAB directory 5-25
    - creating new file 6-7
    - debugging 6-1, 6-33
      - options 6-4
    - editing 6-1
      - options 6-4
    - editing without running MATLAB 6-10
    - file association (Windows) 6-10
    - finding 5-40
    - naming 5-19
    - opening 6-8
    - pausing 6-35
    - performance of 7-35
    - printing 6-32
    - profiling 7-35
    - replacing content 6-24

- M-files (continued)
    - running
      - at startup 1-6
      - at startup (UNIX) 1-10
      - from Command Window 3-5
      - from Current Directory browser 5-39
    - saving 6-29
    - search path 5-18
    - searching contents of 5-40
    - source control on PC platforms 9-2
    - source control on UNIX platforms 9-27
    - user-contributed 4-38
    - viewing description 5-44
  - Microsoft Word
    - converting document to M-book 8-21
    - specifying version and location 8-40
  - mkdir 5-35
  - M-Lint
    - suppressing messages 7-27
  - model files
    - source control on PC platforms 9-2
    - source control on UNIX platforms 9-27
  - more 3-18
  - mouse, right-clicking 2-31
  - multiple item selection 2-38
  - multiple lines for statements 3-11
  - multiprocessing 3-5
- N**
- naming functions and variables 5-19
  - navigating
    - M-File 6-21
  - nested comments 6-16
  - nested functions
    - indenting 6-20
  - newsgroup 4-39
  - newsletters 4-39
  - nodesktop startup option 1-9
  - nojvm startup option 1-10
  - Normal style (Microsoft Word)
    - default style in M-book 8-33
    - defaults 8-34
    - used in undefined input cells 8-26
  - nosplash startup option 1-10
  - Notebook
    - configuring 8-39
    - debugging 8-22
    - options 8-45
    - overview 8-18
    - platforms supported 8-18
  - notebook
    - basics 8-18
    - configuring 8-39
  - Notebook menu
    - Word menu bar 8-18
  - numbering lines 6-20
  - numeric format
    - controlling in M-book 8-35
    - output 3-19
    - preferences 3-28
- O**
- open 5-38
  - opening files
    - Current Directory browser 5-37
  - openvar 5-11
  - operating system commands 3-6
  - optimizing performance of M-files 7-35
  - options
    - shutdown 1-13
    - startup 1-4

- output
  - display
    - format 3-19
    - hidden 3-18
  - hiding 3-18
  - in Command Window 3-2
  - paging 3-18
  - spaces per tab 3-29
  - spacing of 3-28
  - suppressing 3-18
- output cells
  - converting to text 8-32
  - purging 8-32
- Output style
  - definition 8-34
- P**
- paging in the Command Window 3-18
- path
  - adding directories to 5-32
  - changing 5-22
  - description 5-18
  - order of directories 5-19
  - problems and recovering 5-27
  - saving changes 5-25
  - saving for future sessions 5-25
  - viewing 5-22
- pathdef.m 5-20
  - location 5-25
- pathtool 5-20
- pausing execution of M-file 6-40
- pcode
  - error checking 6-34
- PDF
  - printing documentation files 4-30
  - reader, preference for Help browser 4-28
- performance
  - improving for M-files 7-35
- periods (...) 3-11
- pop-up menus 2-31
- precision
  - output display 3-19
- preferences
  - MATLAB, general 2-54
- printing
  - Command History 3-35
  - Command Window contents 3-20
  - documentation 4-30
  - help 4-30
  - M-files 6-32
- printing an M-book
  - cell markers 8-33
  - color 8-33
  - color modes 8-38
  - defaults 8-33
- problems, reporting to The MathWorks 4-38
- product filter in Help browser
  - preference 4-27
- product version 2-43
- profile 7-51
  - example 7-53
- profiling 7-35
- programs
  - running from MATLAB 3-6
  - stopping while running 3-5
- prompt
  - in Command Window 3-2
  - when debugging 6-44
- properties
  - source control on PC platforms 9-24
  - tab completion 3-15
- properties 9-25

publishing

cells

platforms supported 8-15

Purge Output Cells 8-45

purging output cells 8-32

## Q

quitting

confirmation 1-13

quitting MATLAB 1-13

## R

R Inc Search field 6-25

rapid development 6-63

recall previous lines 3-12

recover deleted files 2-55

recycle function

preference 2-55

red breakpoint icons 6-42

redo

in desktop 2-39

reference pages 4-2

regserver startup option 1-6

remove 9-20

removing files from source control system 9-19

requirements

MATLAB 1-2

results in MATLAB, displaying 5-11

revision control system

*See* source control system interface on PC

platforms or source control system

interface on UNIX platforms

right-hand text limit 6-20

roadmap for documentation 4-8

rule

in Editor 6-20

running

M-files 5-39

M-files in Editor 6-31

runsc 9-26

run-time errors 6-33

## S

save 5-6

saving

automatically in Editor 6-30

MAT-files

preferences 2-56

M-files 6-29

script for startup 1-4

scroll buffer for Command Window 3-28

scrolling in Command Window 3-18

SCS

*See* source control system interface on PC

platforms or source control system

interface on UNIX platforms

search path 5-18

problems and recovering 5-27

saving for future sessions 5-25

searching

for M-files 5-40

Help browser 4-12

Boolean 4-15

results 4-12

text in page 4-21

M-file content

across files 5-40

- searching (continued)
  - text
    - Command History 3-34
    - Command Window 3-22
  - text in current file 6-23
  - text in M-files 6-24
  - text, incrementally 6-25
- section breaks
  - in calc zones 8-42
- selecting multiple items 2-38
- semicolon (;)
  - after functions 3-18
  - between functions 3-11
- separator in functions 3-11
- session
  - automatic log file 1-6
- session log
  - Command History 3-30
  - diary 3-21
- setting breakpoints 6-40
- shadowed functions 5-19
- shell escape 3-6
- shortcut
  - for MATLAB in Windows 1-2
  - keys in MATLAB 2-35
- shortcut keys
  - Command Window editing 3-16
  - Editor 6-21
- shortcuts
  - categories 2-28
  - creating
    - Command History 3-33
  - defined 2-21
  - deleting 2-28
  - editing 2-28
  - Editor 6-21
  - file 2-24
  - labels, hiding 2-28
  - moving 2-28
  - organizing 2-28
  - toolbar 2-25
- shortcuts.xml 2-24
- Show Cell Markers 8-45
- show file history on PC platforms 9-20
- showdiff 9-23
- shutdown
  - MATLAB 1-13
  - options 1-13
- Simulink
  - interfacing files with source control systems on PC platforms 9-2
  - interfacing files with source control systems on UNIX platforms 9-27
- smart recall 3-12
- snapshot 7-8
- source control system interface on PC platforms
  - adding file 9-4
  - checking in files 9-11
  - checking out files 9-8
  - comparing working copy to source control version 9-22
  - displaying file properties 9-24
  - get latest version of file 9-15
  - preferences 9-3
  - removing files 9-19
  - selecting current system 9-3
  - showing file history 9-20
  - specifying 9-3
  - starting source control system 9-26
  - undoing file check-out 9-18

- source control system interface on UNIX
  - platforms
  - checking in files 9-29
  - checking out files 9-31
  - configuring ClearCase source control system 9-29
  - preferences 9-27
  - selecting current system 9-27
  - specifying 9-27
  - supported systems 9-27
  - undoing file check-out 9-32
- spaces in MATLAB commands 3-8
- spacing
  - output in Command Window 3-28
  - tabs in Command Window 3-29
- splash screen
  - UNIX startup option 1-10
  - Windows startup option 1-6
- stack
  - in Editor 6-44
  - viewing 5-8
- stand-alone Editor 6-10
- Start button 2-19
  - adding toolboxes 2-21
- starting MATLAB
  - DOS 1-2
  - UNIX 1-3
  - Windows 1-2
- starting source control system
  - on PC platforms 9-26
- startup
  - directory for MATLAB 1-3
  - files for MATLAB 1-4
  - options for MATLAB 1-4
  - script 1-4
- startup.m
  - location 1-5
  - startup file 1-4
- Stateflow files
  - source control on PC platforms 9-2
  - source control on UNIX platforms 9-27
- statements
  - defined 3-3
  - executing a group of 2-21
  - long (on multiple lines) 3-11
- stepping through M-file 6-45
- stopping a running program 3-5
- stops
  - in M-files 6-40
- stops (...) 3-11
- strings
  - across multiple lines 3-11
  - color indicators 2-52
  - saving as Unicode 2-56
- structures
  - tab completion 3-14
- style preferences for text 2-44
- styles in M-book
  - modifying 8-33
- subfunction
  - displayed in Editor status bar 6-20
- subfunctions
  - going to in M-file 6-23
- suggestions to The MathWorks 4-40
- support
  - technical 4-38
- suppressing M-Lint messages 7-27
- suppressing output 3-18
- switches
  - for startup 1-4



- syntax
  - color indicators 2-52
  - color preferences in MATLAB 2-50
  - coloring and indenting 3-9
  - errors 6-33
  - highlighting 6-19
  - system requirements
    - MATLAB 1-2
  
- T**
- tab
  - indenting in Editor 6-19
  - spacing in Command Window 3-29
- tab completion 3-12
- table of contents for help 4-7
- Technical Support
  - contacting 4-38
  - Web page 2-42
- templates
  - M-book 8-33
- temporary directory
  - for deleted files 2-55
- terminating a running program 3-5
- text
  - converting to input cells 8-42
  - finding in page in Help browser 4-21
  - preferences in MATLAB 2-44
  - styles in M-book 8-33
- text editors for M-files 6-4
- text files
  - editing in Editor 6-12
  - opening in Editor 6-8
- time
  - measured for M-files 7-35
  - time-out message
    - while evaluating multiple input cells in an M-book 8-44
- tmp/MATLAB\_Files directory 2-55
- Toggle Graph Output for Cell 8-46
- toolbars
  - desktop 2-32
  - shortcuts 2-25
- toolbox path cache
  - preferences 1-11
- tools in desktop
  - description 2-2
- tooltips 2-32
- tooltips for data 6-47
- Trash Can 2-55
- type ahead feature 3-12
  - Command History 3-33
  
- U**
- UNC pathname 7-12
- uncheckout 9-19
- uncomment 6-14
- Undefine Cells 8-46
- undo
  - in desktop 2-39
- undo in Editor 6-19
- undoing file check-out
  - on PC platforms 9-18
  - on UNIX platforms 9-32
- Ungroup Cells 8-47
- Unicode
  - preference when saving 2-56
- unregserver startup option 1-6
- updates 2-43

- updates to products 2-42
- uppercase usage in MATLAB 3-8
- Use 16-Color Figures 8-38
- utilities
  - running from MATLAB 3-6

## V

- values
  - examining 6-46
  - viewing in Editor 6-31
- variables
  - clearing 5-7
  - displaying values of 5-11
  - editing values 5-10
  - graphing from the Workspace browser 5-8
  - naming 5-19
  - saving 5-4
  - viewing during execution 6-46
  - workspace 5-2
- version 2-43
  - information for MathWorks products 4-40
  - startup option for UNIX 1-8
- version control system
  - See* source control system interface on PC
    - platforms or source control system interface on UNIX platforms
- viewing desktop tools 2-6
- Visible figure property
  - embedding graphics in M-book 8-36

## W

- warning breakpoints 6-60
- warning message identifiers 6-62
- Web
  - accessing from MATLAB 2-42
  - site for The MathWorks 2-42

- Web browser
  - font 2-31
  - in MATLAB 2-29
  - proxy server 2-31
- what 5-32
- who 5-4
- whos 5-4
- width of Command Window 3-28
- windows in desktop
  - about 2-2
  - arrangement 2-5
  - closing 2-6
  - opening 2-6
- winword.exe 8-40
- Word documents
  - converting to M-book 8-21
- work directory 1-3
- working directory 5-30
- workspace
  - base 5-8
  - clearing 5-7
  - defined 5-2
  - functions 5-8
  - initializing in M-book 8-25
  - loading 5-6
  - M-book contamination 8-22
  - opening 5-6
  - protecting integrity 8-22
  - saving 5-4
  - tool 5-2
  - viewing 5-3
  - viewing during execution 6-46
- Workspace browser
  - description 5-2
  - preferences 5-9
- wrapping lines 3-28
- wrapping long lines 3-11

**X**

Xserver option for UNIX 1-8

**Y**

yellow highlighting in M-file 6-65

