


Polyspace[®] Products for C/C++ Getting Started Guide

R2012a



How to Contact MathWorks

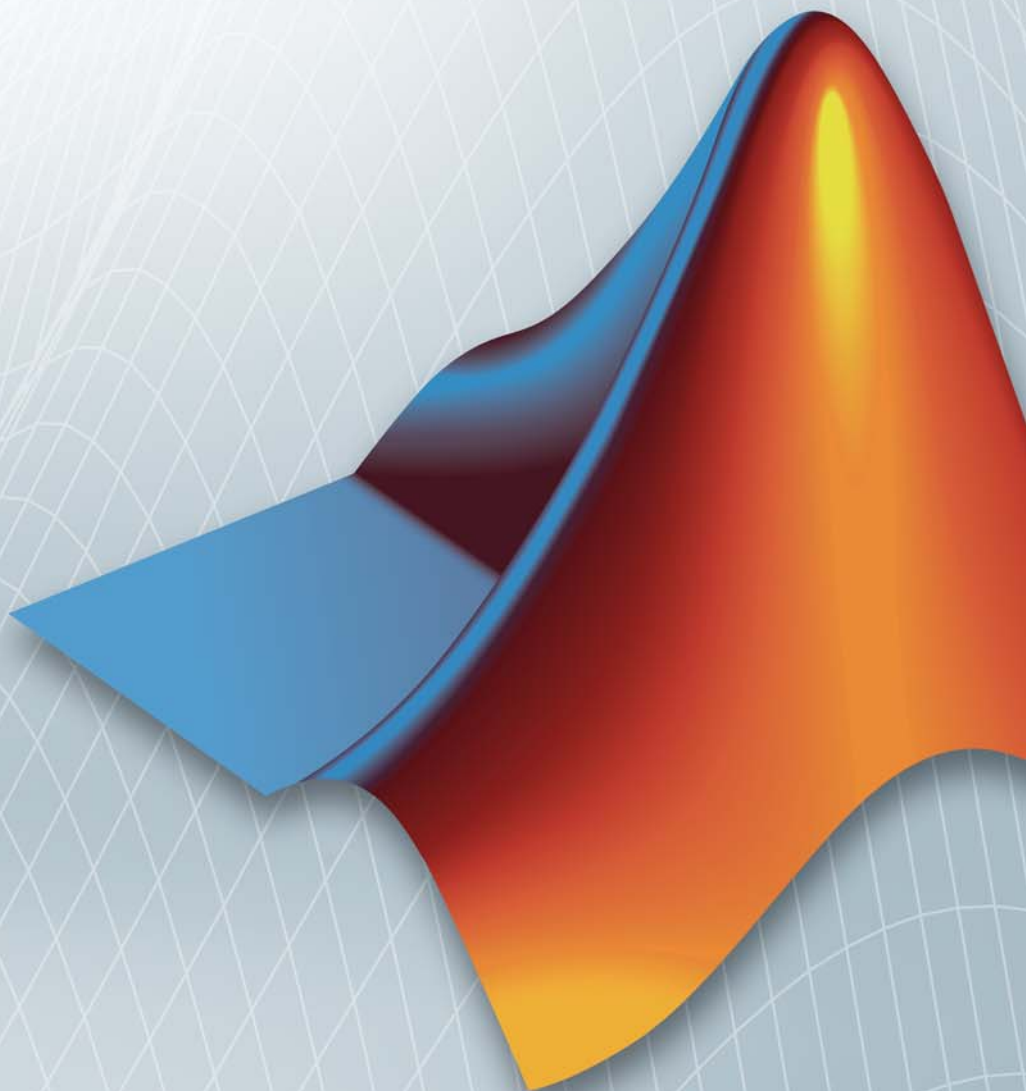

www.mathworks.com Web
comp.soft-sys.matlab Newsgroup
www.mathworks.com/contact_TS.html Technical Support



suggest@mathworks.com Product enhancement suggestions
bugs@mathworks.com Bug reports
doc@mathworks.com Documentation error reports
service@mathworks.com Order status, license renewals, passcodes
info@mathworks.com Sales, pricing, and general information



508-647-7000 (Phone)



508-647-7001 (Fax)



The MathWorks, Inc.
3 Apple Hill Drive
Natick, MA 01760-2098

For contact information about worldwide offices, see the MathWorks Web site.

Polyspace® Products for C/C++ Getting Started Guide

© COPYRIGHT 1997–2012 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

March 2008	First printing	Revised for Version 5.1 (Release 2008a)
October 2008	Second printing	Revised for Version 6.0 (Release 2008b)
March 2009	Third printing	Revised for Version 7.0 (Release 2009a)
September 2009	Online only	Revised for Version 7.1 (Release 2009b)
March 2010	Online only	Revised for Version 7.2 (Release 2010a)
September 2010	Fourth Printing	Revised for Version 8.0 (Release 2010b)
April 2011	Fifth Printing	Revised for Version 8.1 (Release 2011a)
September 2011	Online only	Revised for Version 8.2 (Release 2011b)
March 2012	Online only	Revised for Version 8.3 (Release 2012a)

Introduction to Polyspace Products for Verifying C/C++ Code

1

Product Overview	1-2
Polyspace Client for C/C++	1-2
Polyspace Server for C/C++	1-2
Polyspace Verification	1-4
Overview of Polyspace Verification	1-4
The Value of Polyspace Verification	1-4
Product Components	1-7
Polyspace Verification Environment	1-7
Other Polyspace Components	1-10
Installing Polyspace Products	1-12
Finding the Installation Instructions	1-12
Obtaining Licenses for Polyspace® Client™ for C/C++ and Polyspace® Server™ for C/C++	1-12
Working with Polyspace Software	1-13
Basic Workflow	1-13
Tutorials in This Guide	1-14
Additional Information and Support	1-16
Product Help	1-16
MathWorks Online	1-16
Related Products	1-17
Polyspace Products for Verifying Ada Code	1-17
Polyspace Products for Linking to Models	1-17

Setting Up a Polyspace Project

2

About Setting Up a Project Tutorial	2-2
Overview	2-2
Example Files	2-2
Creating a New Project	2-3
What Is a Project?	2-3
Preparing Project Folders	2-4
Opening Polyspace Verification Environment	2-5
Creating a New Project to Verify the Example C File	2-7

Running a Verification

3

About Running a Verification Tutorial	3-2
Overview	3-2
Before You Start	3-3
Preparing for Verification	3-4
Opening the Project	3-4
Specifying Source Files to Verify	3-5
Checking for Compilation Problems	3-5
Starting Server Verification from Project Manager ...	3-10
Starting the Verification	3-10
Monitoring Progress of the Verification	3-12
Removing Verification Results from the Server	3-18
Troubleshooting a Failed Verification	3-19
Using Polyspace In One Click to Launch Verification ..	3-22
Overview of Polyspace In One Click	3-22
Setting the Active Project	3-22
Sending Files to Polyspace Software	3-24

Launching Client Verification from Project Manager	3-27
Starting the Verification	3-27
Monitoring the Progress of the Verification	3-29
Completing Verification	3-30
Stopping the Verification Before It is Complete	3-31

Reviewing Verification Results

4

About Reviewing Verification Results Tutorial	4-2
Overview	4-2
Before You Start	4-2
Opening Verification Results	4-3
Opening Results Manager perspective	4-3
Opening Verification Results	4-3
Exploring Results Manager perspective	4-4
Overview	4-4
Reviewing the Results Explorer Tab	4-5
Reviewing Results	4-8
What are Review Levels?	4-8
Displaying All Checks	4-9
Reviewing All Checks	4-9
Reviewing Additional Examples of Checks	4-15
Filtering Checks	4-20
Reviewing Results Systematically	4-24
Reviewing Checks at Level 0	4-24
Reviewing Checks at Levels 1, 2, and 3	4-25
Reviewing Checks Progressively	4-27
Automatically Testing Unproven Code	4-30
Generating Reports of Verification Results	4-31
Polyspace Report Generator Overview	4-31

Checking Compliance with Coding Rules

5

About Checking Compliance with Coding Rules	
Tutorial	5-2
Overview	5-2
Before You Start	5-3
Setting Up Coding Rules Checking	5-4
Opening Your Example Project	5-4
Creating New Module	5-5
Setting MISRA C Checking Option	5-8
Creating a MISRA C Rules File	5-9
Excluding Files from the MISRA C Checking	5-12
Configuring Text and XML Editors	5-13
Saving the Project	5-14
Running a Verification with Coding Rules Checking ..	5-15
Starting the Verification	5-15
Examining MISRA C Violations	5-16
Opening MISRA-C Report	5-19

Index

Introduction to Polyspace Products for Verifying C/C++ Code

- “Product Overview” on page 1-2
- “Polyspace Verification” on page 1-4
- “Product Components” on page 1-7
- “Installing Polyspace Products” on page 1-12
- “Working with Polyspace Software” on page 1-13
- “Additional Information and Support” on page 1-16
- “Related Products” on page 1-17

Product Overview

In this section...
“Polyspace Client for C/C++” on page 1-2
“Polyspace Server for C/C++” on page 1-2

Polyspace Client for C/C++

Prove the absence of run-time errors in source code

Polyspace® Client™ for C/C++ provides code verification that proves the absence of overflow, divide-by-zero, out-of-bounds array access, and certain other run-time errors in source code using static code analysis that does not require program execution, code instrumentation, or test cases. Polyspace Client for C/C++ uses formal methods-based abstract interpretation techniques to verify code. You can use it on handwritten code, generated code, or a combination of the two, before compilation and test.

Support for industry standards is available through IEC Certification Kit (for ISO 26262 and IEC 61508) and DO Qualification Kit (for DO-178).

Key Features

- File- and class-level software component verification
- Formal method based abstract interpretation
- Display of run-time errors directly in code
- MISRA-C:2004, MISRA-C++:2008, and JSF++ coding standard enforcement, with direct source file links
- Cyclomatic complexity and other code metrics
- Eclipse™ and Microsoft® Visual Studio® IDE integration

Polyspace Server for C/C++

Perform code verification on computer clusters and publish metrics

Polyspace Server™ for C/C++ provides code verification that proves the absence of overflow, divide-by-zero, out-of-bounds array access, and certain

other run-time errors in source code. For faster performance, Polyspace Server for C/C++ lets you schedule verification tasks to run on a computer cluster. Jobs are submitted to the server using Polyspace Client for C/C++. You can integrate jobs into automated build processes and set up e-mail notifications. You can view defects, regressions, and code metrics via a Web browser. You then use the client to download and visualize verification results.

Support for industry standards is available through IEC Certification Kit (for ISO 26262 and IEC 61508) and DO Qualification Kit (for DO-178).

Key Features

- Web-based dashboard providing code metrics and quality status
- Automated job scheduling and e-mail notification
- Multi-server job queue manager
- Accelerated performance on multicore servers
- Verification report generation
- Mixed operating system environment support

Polyspace Verification

In this section...
“Overview of Polyspace Verification” on page 1-4
“The Value of Polyspace Verification” on page 1-4

Overview of Polyspace Verification

Polyspace products verify C, C++, and Ada code by detecting run-time errors before code is compiled and executed.

To verify the source code, you set up verification parameters in a project, run the verification, and review the results. A graphical user interface helps you to efficiently review verification results. Results are color-coded:

- **Green** – Indicates code that never has an error.
- **Red** – Indicates code that always has an error.
- **Gray** – Indicates unreachable code.
- **Orange** – Indicates unproven code (code that might have an error).

The color-coding helps you to quickly identify errors and find the exact location of an error in the source code. After you fix errors, you can easily run the verification again.

The Value of Polyspace Verification

Polyspace verification can help you to:

- “Ensure Software Reliability” on page 1-4
- “Decrease Development Time” on page 1-5
- “Improve the Development Process” on page 1-6

Ensure Software Reliability

Polyspace software ensures the reliability of your C and C++ applications by proving code correctness and identifying run-time errors. Using advanced

verification techniques, Polyspace software performs an exhaustive verification of your source code.

Because Polyspace software verifies all possible executions of your code, it can identify code that:

- Never has an error
- Always has an error
- Is unreachable
- Might have an error

With this information, you know how much of your code is free of run-time errors, and you can improve the reliability of your code by fixing errors.

You can also improve the quality of your code by using Polyspace verification software to check that your code complies with established coding standards, such as the MISRA C®, MISRA® C++ or JSF++ standards.¹

Decrease Development Time

Polyspace software reduces development time by automating the verification process and helping you to efficiently review verification results. You can use it at any point in the development process. However, using it during early coding phases allows you to find errors when it is less costly to fix them.

You use Polyspace software to verify source code before compile time. To verify the source code, you set up verification parameters in a project, run the verification, and review the results. This process takes significantly less time than using manual methods or using tools that require you to modify code or run test cases.

Color-coding of results helps you to quickly identify errors. You will spend less time debugging because you can see the exact location of an error in the source code. After you fix errors, you can easily run the verification again.

1. MISRA and MISRA C are registered trademarks of MISRA Ltd., held on behalf of the MISRA Consortium.

Using Polyspace verification software helps you to use your time effectively. Because you know which parts of your code are error-free, you can focus on the code that has definite errors or might have errors.

Reviewing code that might have errors (orange code) can be time-consuming, but Polyspace software helps you with the review process. You can use filters to focus on certain types of errors or you can allow the software to identify the code that you should review.

Improve the Development Process

Polyspace software makes it easy to share verification parameters and results, allowing the development team to work together to improve product reliability. Once verification parameters have been set up, developers can reuse them for other files in the same application.

Polyspace verification software supports code verification throughout the development process:

- An individual developer can find and fix run-time errors during the initial coding phase.
- Quality assurance engineers can check overall reliability of an application.
- Managers can monitor application reliability by generating reports from the verification results.

Product Components

In this section...
“Polyspace Verification Environment” on page 1-7
“Other Polyspace Components” on page 1-10

Polyspace Verification Environment


The Polyspace verification environment (PVE) is the graphical user interface of the Polyspace Client for C/C++ software. You use the Polyspace verification environment to create Polyspace projects, start verifications, and review verification results.

The Polyspace verification environment consists of two perspectives:

- “Project Manager Perspective” on page 1-7
- “Results Manager Perspective” on page 1-9

Project Manager Perspective

The Project Manager perspective allows you to create projects, set verification parameters, and start verifications.

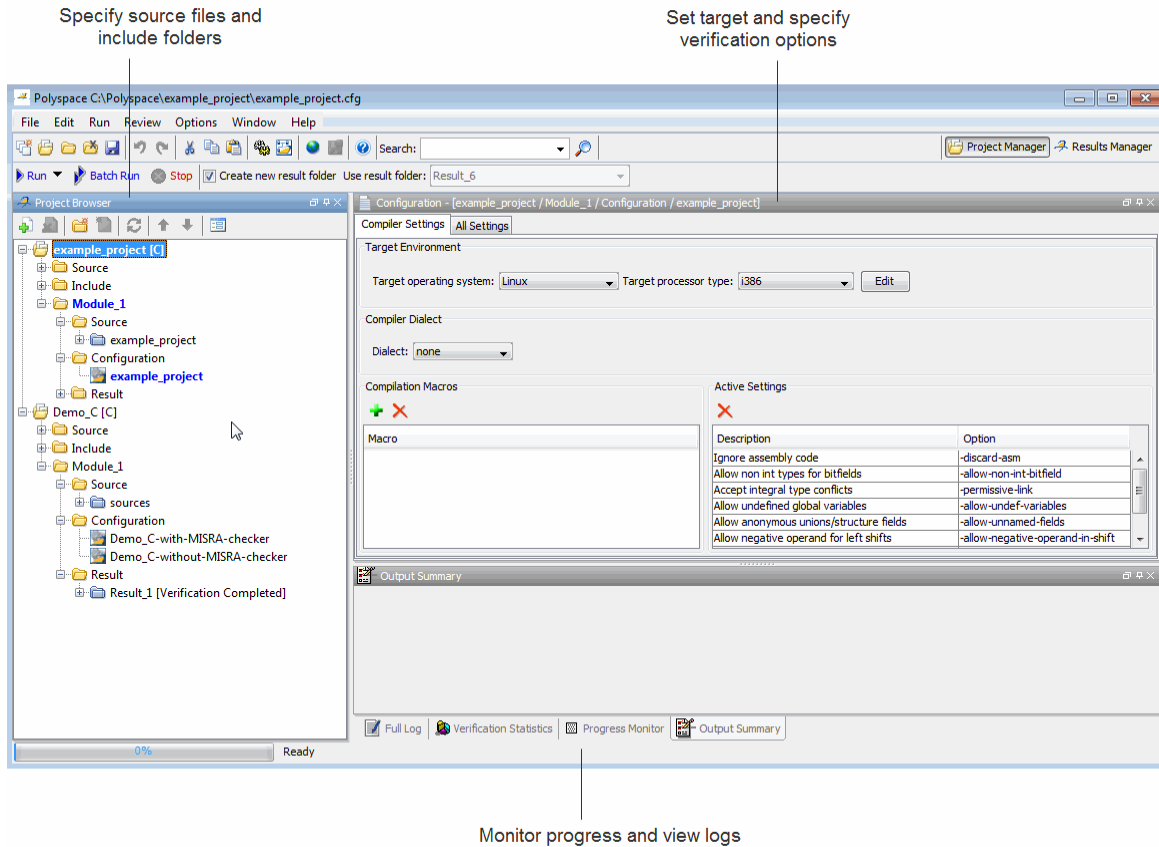

You use the Project Manager perspective in the tutorial in Chapter 2, “Setting Up a Polyspace Project”.

Results Manager Perspective

The Results Manager perspective allows you to review:

- Results from the Polyspace coding rules checker, to ensure compliance with established coding standards.
- Verification results, comment individual checks, and track review progress.

The screenshot displays the Polyspace Results Manager perspective, divided into several key sections:

- Check details:** Shows a specific error (IDP.8) with a yellow background. The error message is: "IDP.8 Error : pointer is outside its bounds", "dereference of local variable 'p' (pointer to int 32, size: 32 bits): pointer is not null", "points to 4 bytes at offset 400 in buffer of 400 bytes, so is outside bounds", and "may point to variable or field of variable in: (Pointer_Arithmetic:array)".
- Review Statistics:** A table showing coding review progress:

Coding review progress	Count	Progress
Red IDP justified / to justify	0/1	0
Red justified / to justify	0/5	0
Gray justified / to justify	0/6	0
Orange justified / to justify	0/18	0
Software reliability indicator	259/294	88
- Source code:** Displays the C code snippet where the error occurred:


```

104 p = 5; /* Out of bounds */
...
if(get_bus_status() >= 0)
{
  if(get_oil_pressure() >= 0)
  {
    p = 5; /* Out of bounds */
  }
  else
  {
    i++;
  }
}

```
- Call hierarchy:** Shows the call stack, including "example.Pointer_Arithmetic", "pst_stubs_0_get_bus_status", and "example_get_oil_pressure".
- Variable access:** Shows the variable "Demo_C" and its associated data structures like "initialisations.arr", "initialisations.current_data", and "initialisations.first_payload".
- Results Explorer:** A tree view on the left showing various checks (NIVL, OVFL, IDP, NIP, MISRA C, IRV, UNR) with their status (passed, failed, or not applicable).

Labels at the bottom of the image identify the main sections: "Run-time checks and coding rule violations" (Results Explorer), "Source code" (Source window), "Variable access" (Variable Access window), and "Call hierarchy" (Call Hierarchy window).

You use the Results Manager perspective in the tutorials in Chapter 5, “Checking Compliance with Coding Rules” and Chapter 4, “Reviewing Verification Results”.


Other Polyspace Components

In addition to the Polyspace verification environment, Polyspace products provide several other components to manage verifications, improve productivity, and track software quality. These components include:

- Polyspace Queue Manager Interface (Spooler)
- Polyspace in One Click
- Polyspace Metrics Web Interface

Polyspace Queue Manager Interface (Polyspace Spooler)

The Polyspace Queue Manager (also called the Polyspace Spooler) is the graphical user interface of the Polyspace Server for C/C++ software. You use the Polyspace Queue Manager Interface to move jobs within the queue, remove jobs, monitor the progress of individual verifications, and download results.

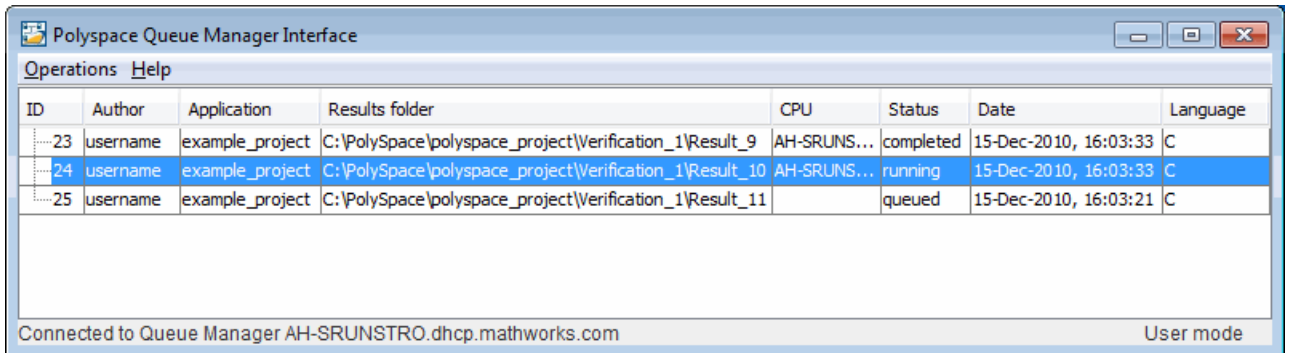

The screenshot shows a window titled "Polyspace Queue Manager Interface" with a menu bar containing "Operations" and "Help". Below the menu bar is a table with the following columns: ID, Author, Application, Results folder, CPU, Status, Date, and Language. The table contains three rows of data. The second row is highlighted in blue. At the bottom of the window, it says "Connected to Queue Manager AH-SRUNSTRO.dhcp.mathworks.com" and "User mode".

ID	Author	Application	Results folder	CPU	Status	Date	Language
...23	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_9	AH-SRUNS...	completed	15-Dec-2010, 16:03:33	C
...24	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_10	AH-SRUNS...	running	15-Dec-2010, 16:03:33	C
...25	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_11		queued	15-Dec-2010, 16:03:21	C

You use the Polyspace Queue Manager in the tutorial “Starting Server Verification from Project Manager” on page 3-10.

Polyspace in One Click

Polyspace in One Click is a convenient way to verify multiple files using the same set of options.

After creating a project with the options that you want, you can use Polyspace in One Click to designate that project as the *active project*, and then send source files to Polyspace software for verification with a single mouse click.

You use Polyspace in One Click in the tutorial “Using Polyspace In One Click to Launch Verification” on page 3-22.

Polyspace Metrics Web Interface

Polyspace Metrics is a web-based tool for software development managers, quality assurance engineers, and software developers. Polyspace Metrics allows you to evaluate software quality metrics, and monitor changes in code metrics, coding rule violations, and run-time checks through the lifecycle of a project.

For information on using Polyspace Metrics, see “Software Quality with Polyspace Metrics” in the *Polyspace Products for C/C++ User’s Guide*.

Installing Polyspace Products

In this section...
“Finding the Installation Instructions” on page 1-12
“Obtaining Licenses for Polyspace® Client™ for C/C++ and Polyspace® Server™ for C/C++” on page 1-12

Finding the Installation Instructions

The tutorials in this guide require Polyspace Client for C/C++ and Polyspace Server for C/C++. Instructions for installing Polyspace products are in the *Polyspace Installation Guide*. Before installing Polyspace products, you must obtain the necessary licenses.

Obtaining Licenses for Polyspace Client for C/C++ and Polyspace Server for C/C++

For information about obtaining licenses for Polyspace products, see “Polyspace License Installation” in the *Polyspace Installation Guide*.

Working with Polyspace Software


In this section...

“Basic Workflow” on page 1-13

“Tutorials in This Guide” on page 1-14

Basic Workflow

The following graphic shows the basic workflow for using Polyspace software to verify source code.

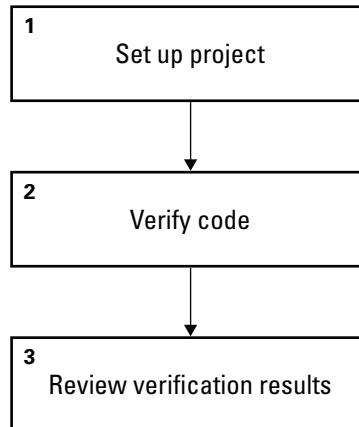

In this workflow, you:


- 1** Use the Project Manager perspective to set up a project file.
- 2** Verify code on a server or client.

You can use the Project Manager perspective to start the verification or you can select files from a Microsoft Windows® folder and send them to Polyspace software for verification. For verifications that run on a server, you use the Polyspace Queue Manager Interface (Polyspace Spooler) to manage the verification and download the results to a client. You can set an option to check coding rules compliance in the first stage of the verification.

3 Use the Results Manager perspective to review verification results.

Tutorials in This Guide

The tutorials guide you through the basic workflow, including the different options for running verifications. The following graphic shows the workflow you follow in these tutorials.

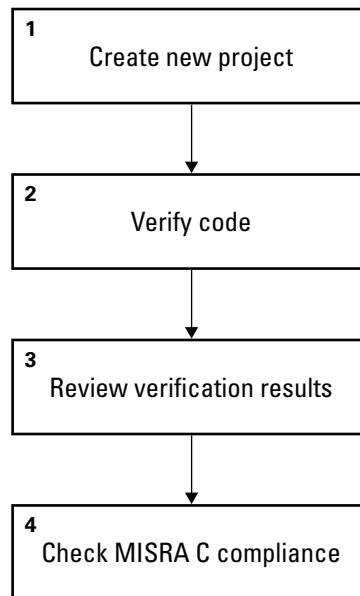

In this workflow, you:

1 Create a new project that you use for the workflow.

This step is in the tutorial in Chapter 2, “Setting Up a Polyspace Project”.

2 Verify a single C file.

This step is in the tutorial in Chapter 3, “Running a Verification”. In this tutorial, you verify the same file using three different methods of running a verification:

- Start a verification that runs on a server using the Project Manager perspective.

- Send files to a server for verification using Polyspace In One Click.
- Start a verification that runs on a client using the Project Manager perspective.

3 Review the verification results.

This step is in the tutorial in Chapter 4, “Reviewing Verification Results”.

4 Modify the project to include MISRA C checking and review the MISRA C violations in the example file.

This step is in the tutorial in Chapter 5, “Checking Compliance with Coding Rules”.

Additional Information and Support

In this section...
“Product Help” on page 1-16
“MathWorks Online” on page 1-16

Product Help

To access Polyspace online Help, select **Help > Help** .

To access the online documentation for Polyspace products, go to:

www.mathworks.com/help/toolbox/polyspace

MathWorks Online

For additional information and support, go to:

www.mathworks.com/products/polyspace

Related Products

In this section...
“Polyspace Products for Verifying Ada Code” on page 1-17
“Polyspace Products for Linking to Models” on page 1-17

Polyspace Products for Verifying Ada Code

For information about Polyspace products that verify Ada code, go to:

<http://www.mathworks.com/products/polyspaceclientada/>

<http://www.mathworks.com/products/polyspaceserverada/>

Polyspace Products for Linking to Models

For information about Polyspace products that link to models, go to:

<http://www.mathworks.com/products/polyspacemodels1/>

<http://www.mathworks.com/products/polyspaceumlrh/>

Setting Up a Polyspace Project

- “About Setting Up a Project Tutorial” on page 2-2
- “Creating a New Project” on page 2-3

About Setting Up a Project Tutorial

In this section...
“Overview” on page 2-2
“Example Files” on page 2-2

Overview

You must have a project before you can run a Polyspace verification of your source code. In this tutorial, you create the project that you use to run verifications in later tutorials.

Example Files

This tutorial uses the source file `example.c` that comes with the installation. You learn more about the files and folders required for this tutorial in “Preparing Project Folders” on page 2-4.

Creating a New Project

In this section...
“What Is a Project?” on page 2-3
“Preparing Project Folders” on page 2-4
“Opening Polyspace Verification Environment” on page 2-5
“Creating a New Project to Verify the Example C File” on page 2-7

What Is a Project?

In Polyspace software, a project is a named set of parameters for verification of your software project's source files. A project includes:

- Source files
- Include folders
- One or more Configurations, specifying a set of analysis options
- One or more Modules, each of which include:
 - Source (specific versions of source files used in the verification)
 - Configuration (specific set of analysis options used for the verification)
 - Verification results

You can create your own project or use an existing project. You create and modify a project using the Project Manager perspective.

In this tutorial, you create a new project and save it as a configuration file (.cfg).

Preparing Project Folders

Before you start verifying a C file with Polyspace software, you must know the locations of the C source file and the include files. You must also know where you want to store the verification results.

For each project, you decide where to store source files and results. For example, you can create a project folder, and then in that folder, create separate folders for the source files, include files, and results.

For this tutorial, prepare a project folder as follows:

- 1 Create a project folder named `polyspace_project`.
- 2 Open `polyspace_project`, and create the following folders:
 - `sources`
 - `includes`

- 3 Copy the file `example.c` from

`Polyspace_Install\Examples\Demo_C_Single-File\sources`

to

`polyspace_project\sources`

`Polyspace_Install` is the installation folder.

- 4 Copy the files `include.h` and `math.h` from

`Polyspace_Install\Examples\Demo_C_Single-File\sources`

to

`polyspace_project\includes`.

Opening Polyspace Verification Environment

You use the Polyspace verification environment to create projects, start verifications, and review verification results.

To open the Polyspace verification environment:


- 1 Double-click the **Polyspace** icon (Windows systems).



Note On a Linux[®] or UNIX[®] system, use the following command:

```
/usr/local/Polyspace/PVE/bin/polyspace
```


- 2 If you have only Polyspace Client for C/C++ software installed on your computer, skip this step. If you have both Polyspace Client for C/C++ and Polyspace Client for Ada products on your system, the Polyspace Language Selection dialog box opens.

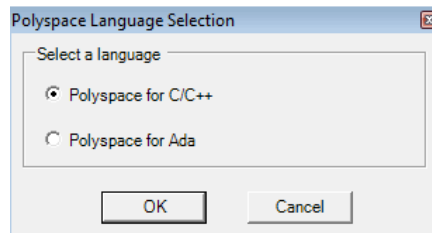

- 3 Select **Polyspace for C/C++** and click **OK**.

The Polyspace verification environment opens.

2 Setting Up a Polyspace Project

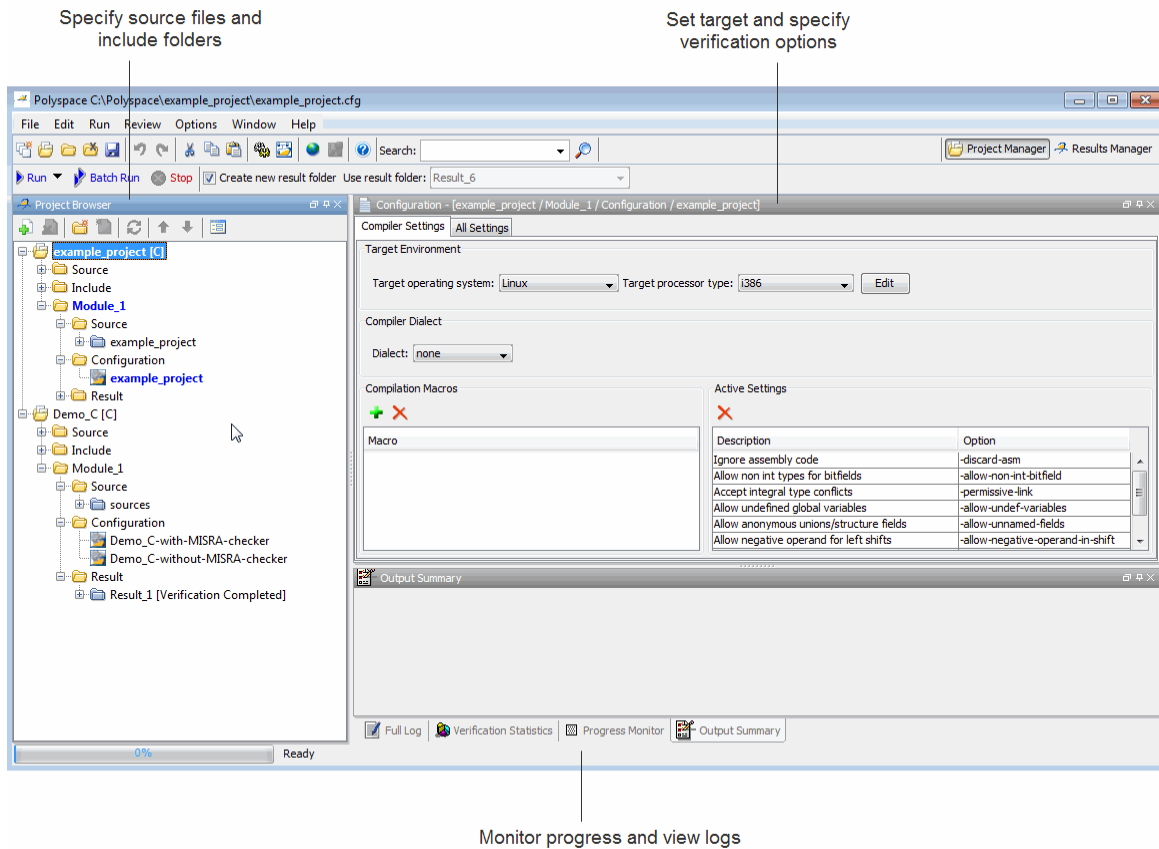

By default, the Polyspace verification environment displays the Project Manager perspective. The Project Manager perspective has three main panes.

Use this section...	For...
Project Browser (upper-left)	Specifying: <ul style="list-style-type: none"> • Source files • Include folders • Results folder
Configuration (upper-right)	Specifying verification options
Output (lower-right)	Monitoring the progress of a verification, and viewing status, log messages, and general verification statistics.

You can resize or hide any of these panes. You learn more about the Project Manager perspective later in this tutorial.

Creating a New Project to Verify the Example C File

You must have a project, saved with file type `cfg`, to run a verification. In this part of the tutorial, you create a new project for verifying `example.c`.

You create a new project by:

- “Opening a New Project” on page 2-7
- “Specifying Source Files and Include Folders” on page 2-11
- “Specifying Target Environment” on page 2-13
- “Specifying Analysis Options” on page 2-14
- “Saving the Project” on page 2-14

Opening a New Project

To open a new project for verifying `example.c`:

- 1 Select **File > New Project**. The Polyspace Project – Properties dialog box opens.

- 2 In the **Project name** field, enter `example_project`.
- 3 Clear the **Default location** check box.


Note In this tutorial, you change the location to the project folder that you created in “Preparing Project Folders” on page 2-4.

You can update the default project location. Select **Options > Preferences**, which opens the Polyspace Preferences dialog box. On the **Project and result folder** tab, in the **Define default project location** field, specify the new default location.

- 4 In the **Location** field, enter or navigate to the project folder that you created earlier.

In this example, the project folder is `C:\Polyspace\polyspace_project`.


- 5 In the Project language section, select **C**.

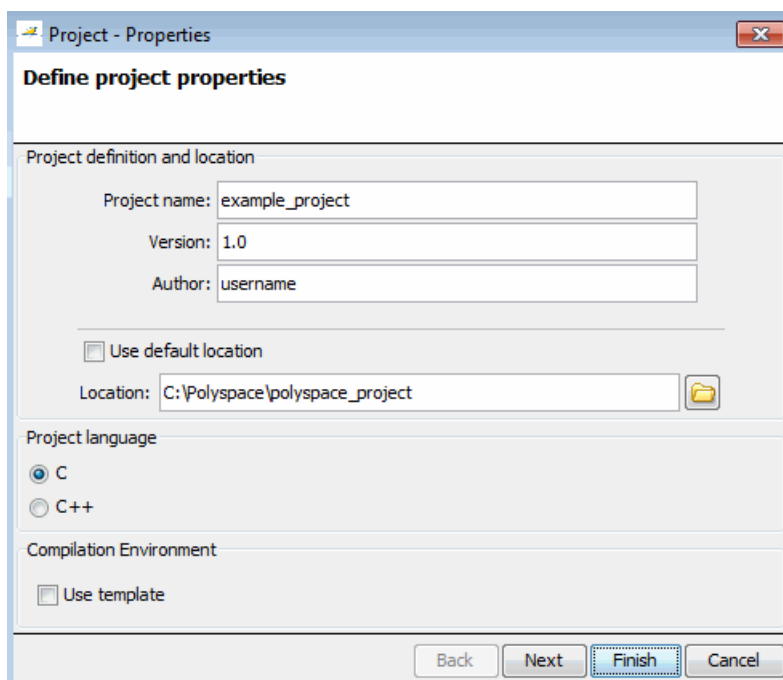

6 Click Finish.

The example_project opens in the Polyspace verification environment.


2 Setting Up a Polyspace Project

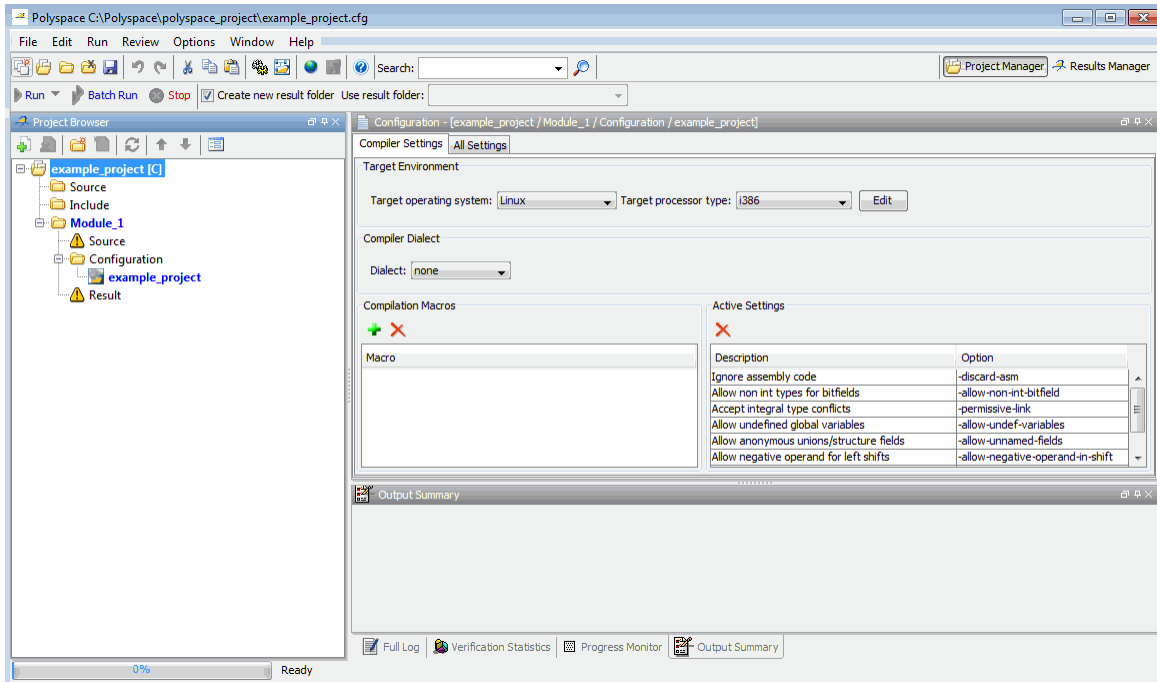

Specifying Source Files and Include Folders

To specify the source files and include folders for the verification of `example.c`:

1 In the Project Browser, select the Source folder.

2 On the Project Browser toolbar, click the **Add source** icon . The Polyspace Project – Add Source Files and Include Folders dialog box opens.

3 The project folder `polyspace_project` should appear in the field **Look in**. If it does not, navigate to that folder.


4 Select the sources folder. Then click **Add Source**.

The `example.c` file appears in the Source tree for `example_project`.

5 Select the includes folder. Then click **Add Include**.

The includes folder appears in the Include tree for `example_project`.


2 Setting Up a Polyspace Project

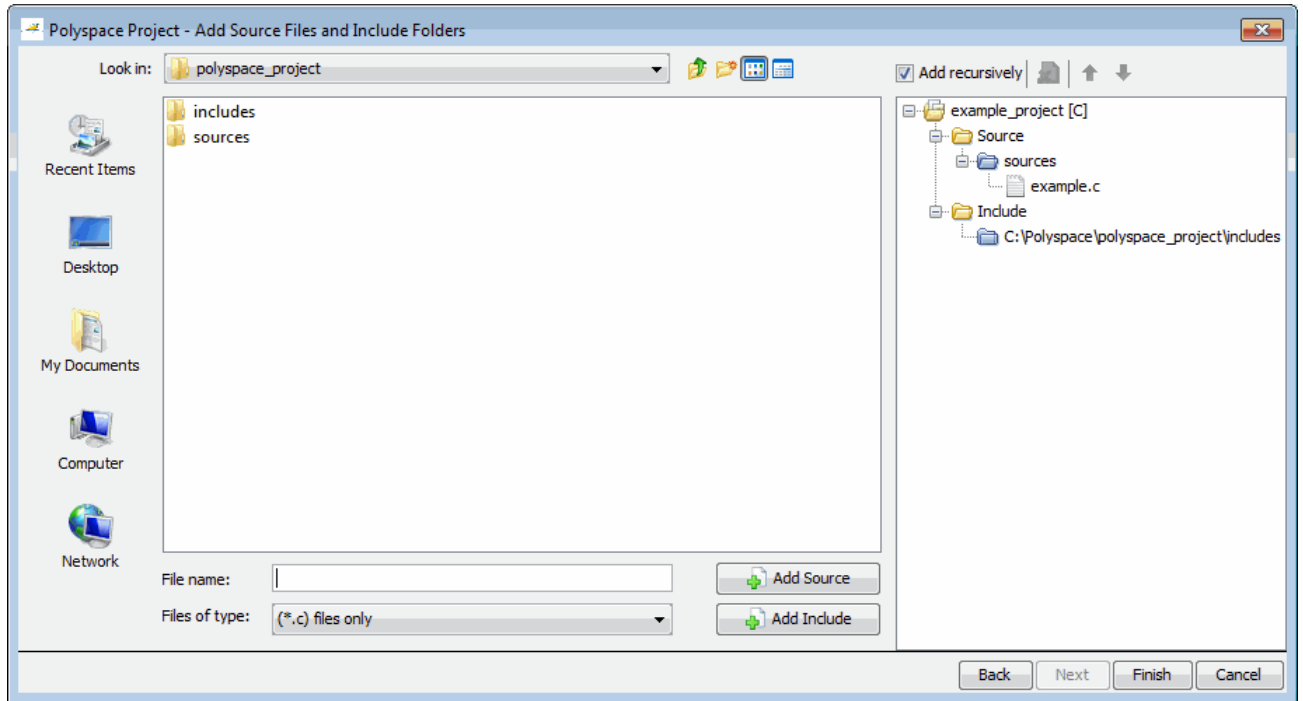

Note In addition to the include folders you specify, Polyspace software automatically adds the standard includes to your project.

6 Click **Finish** to apply the changes and close the dialog box.

The Project Browser now looks like the following graphic.

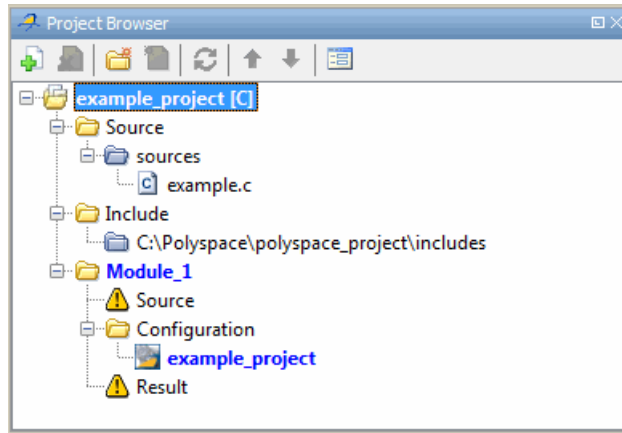


Specifying Target Environment

Many applications are designed to run on specific target CPUs and operating systems. Since some run-time errors are dependent on the target, you must specify the type of CPU and operating system used in the target environment before running a verification.

In the Project Manager perspective, the **Configuration > Compiler Settings** tab allows you to specify the target operating system and processor type for your application.

To specify the target environment for this tutorial:

- 1 From the **Target operating system** drop-down list, select `no_predefined_OS`.

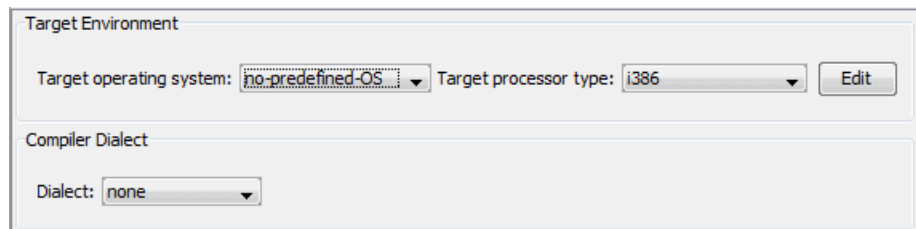

- 2 In the **Target processor type** drop down menu, select `i386`.

For more information about emulating your target environment, see “Setting Up a Target” in the *Polyspace Products for C/C++ User’s Guide*.

Specifying Analysis Options

In the Project Manager perspective, the **Configuration > All Settings** tab allows you to set Analysis options that Polyspace software uses during the verification process.

For this tutorial, you should use the default values for all options.

Analysis options		
[-] General		
Send to Polyspace Server	<input checked="" type="checkbox"/>	-server
Add to results repository	<input type="checkbox"/>	-add-to-results-repository
Keep all preliminary results files	<input type="checkbox"/>	-keep-all-files
Calculate code metrics	<input type="checkbox"/>	-code-metrics
[-] Report Generation	<input type="checkbox"/>	
Report template name	Developer	-report-template
Output format	RTF	-report-output-format
[+] Target/Compilation		
[+] Compliance with standards		
[+] Polyspace inner settings		
[+] Precision/Scaling		
[+] Multitasking		

For more information about analysis options, see “Options Description” in the *Polyspace Products for C/C++ Reference*.

Saving the Project

To save the project, select **File > Save**.

The software saves your project using the **Project name** and **Location** that you specified when creating the project.

Running a Verification

- “About Running a Verification Tutorial” on page 3-2
- “Preparing for Verification” on page 3-4
- “Starting Server Verification from Project Manager” on page 3-10
- “Using Polyspace In One Click to Launch Verification” on page 3-22
- “Launching Client Verification from Project Manager” on page 3-27

About Running a Verification Tutorial

In this section...
“Overview” on page 3-2
“Before You Start” on page 3-3

Overview

Once you have created the project `example.cfg`, as described in “Creating a New Project” on page 2-3, you can run the verification.

You can run a verification on a server or a client.

Use...	For...
Server	<ul style="list-style-type: none">• Best performance• Large files (more than 800 lines of code, including comments)
Client	<ul style="list-style-type: none">• When the server is busy• Small files <hr/> <p>Note Verification on a client takes more time. You might not be able to use your client computer when a verification is running on it.</p> <hr/>

You can start a verification using either the Project Manager or Polyspace In One Click. With either method, the verification can run on a server or a client.

Use...	For...
Project Manager	A basic way to start a verification. You specify the source files in the project file. With the project open, you click a button to start the verification.
Polyspace In One Click	A convenient way to start the verification of several files which use the same verification options. Once you specify the project file containing the verification options, you specify the source files by selecting them from a Microsoft Windows folder. You start the verification by sending the selected files to Polyspace software.

In this tutorial, you learn how to run a verification on a server and on a client, and how to start a verification using the Project Manager and Polyspace In One Click. You verify the file `example.c` three times using a different method each time. You use:

- Project Manager to start a verification that runs on a server.
- Polyspace In One Click to start a verification that runs on a server.
- Project Manager to start a verification that runs on a client.

Each verification stores the same results in your project. You review these results in the tutorial Chapter 4, “Reviewing Verification Results”.

Before You Start

Before you start this tutorial, you must complete Chapter 2, “Setting Up a Polyspace Project”. You use the folders and project file, `example.cfg`, from that tutorial.

Preparing for Verification

In this section...
“Opening the Project” on page 3-4
“Specifying Source Files to Verify” on page 3-5
“Checking for Compilation Problems” on page 3-5

Opening the Project

To run a verification, you must have an open project file. For this tutorial, you use the project file `example.cfg` that you created in Chapter 2, “Setting Up a Polyspace Project”. If `example_project.cfg` is not already open, open it.

To open `example_project.cfg`:

1 If the Polyspace software is not already open, open it.

2 Select **File > Open Project**.

The Open Polyspace Project dialog box opens.

3 Using the **Look in** drop-down list, navigate to `polyspace_project`.

4 Select `example_project.cfg`.

5 Click **Open** to open the file and close the dialog box.

Specifying Source Files to Verify


Each Polyspace project can contain multiple modules. With each module, you can verify a specific set of source files using a specific set of analysis options.

Therefore, before you start a verification, you must specify which files in your project that you want to verify. In the `example_project` in this tutorial, there is only one file to verify.

To copy source files to a module:

- 1 In the Project Browser Source tree, right click `example.c`.
- 2 Select **Copy Source File to > Module_(1)**.

The `example.c` file appears in the Source tree of `Module_(1)`.

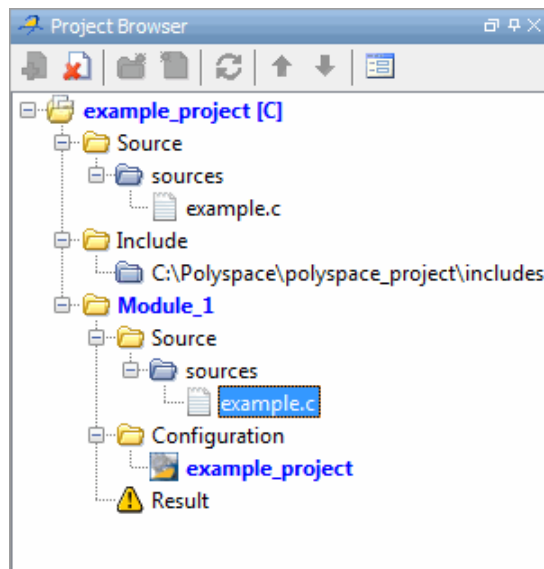

Checking for Compilation Problems

The Compilation Assistant is enabled by default. During a verification, if the Compilation Assistant detects compilation errors, the verification stops and


the software displays errors and possible solutions on the **Output Summary** tab.


Note The Compilation Assistant does not support the verification option `-unit-by-unit`.

To disable the Compilation Assistant, select **Options > Preferences**, which opens the Polyspace Preferences dialog box. Then, on the **Project and result folder** tab, clear the **Compilation Assistant** check box and click **OK**.


To check your project for compilation problems:

- 1 In the **Project Browser** tree, right click the **Include** folder (`..\includes`), then select **Remove**. This will cause a compilation error.

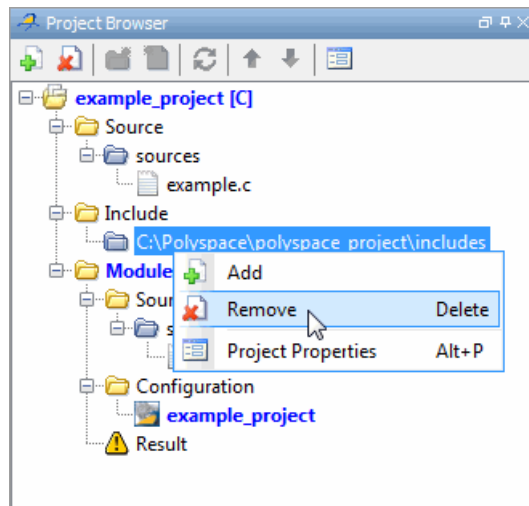


- 2 On the Project Manager toolbar, click 

The software compiles your code and checks for errors, and reports the results on the **Output Summary** tab.

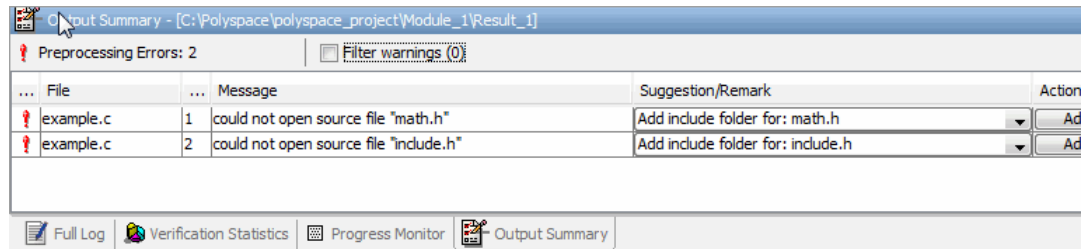


Because you removed the include folder, the software reports a compilation error for the project, along with suggested solutions for the problem.

- 3 Select a **Suggestion/Remark** cell to see a list of possible solutions for the problem.

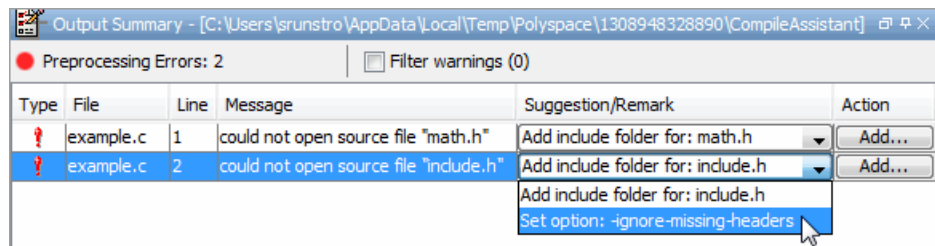


In this case, you can either add the missing include file, or set an option that will attempt to compile the code without the missing include file.

- 4 Select **Set option: -ignore-missing-headers**. Then click **Apply**.
- 5 The software automatically sets the option **Ignore missing header files** for your project. You can see this new option in the Assistant Active Settings table on the **Configuration > Compiler Settings** tab.

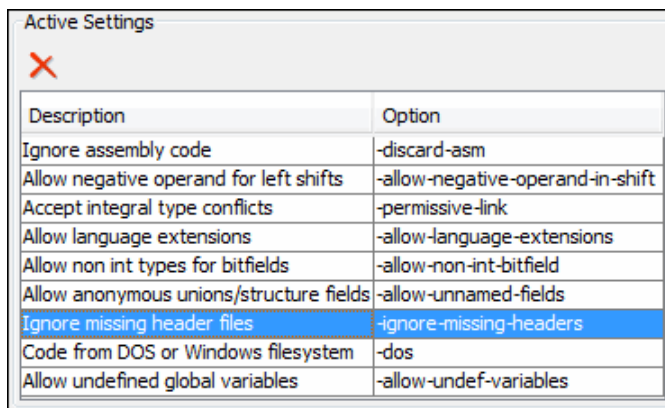


Description	Option
Ignore assembly code	-discard-asm
Allow negative operand for left shifts	-allow-negative-operand-in-shift
Accept integral type conflicts	-permissive-link
Allow language extensions	-allow-language-extensions
Allow non int types for bitfields	-allow-non-int-bitfield
Allow anonymous unions/structure fields	-allow-unnamed-fields
Ignore missing header files	-ignore-missing-headers
Code from DOS or Windows filesystem	-dos
Allow undefined global variables	-allow-undef-variables

- 6 On the Project Manager toolbar, click  .

You see compilation warnings, since the code cannot be compiled without `include.h`.

- 7 In the **Project Browser** tree, right-click the **Include** folder. From the context menu, select **Add**, then click **Add**.

The Add Source Files and Include Folders dialog box opens.

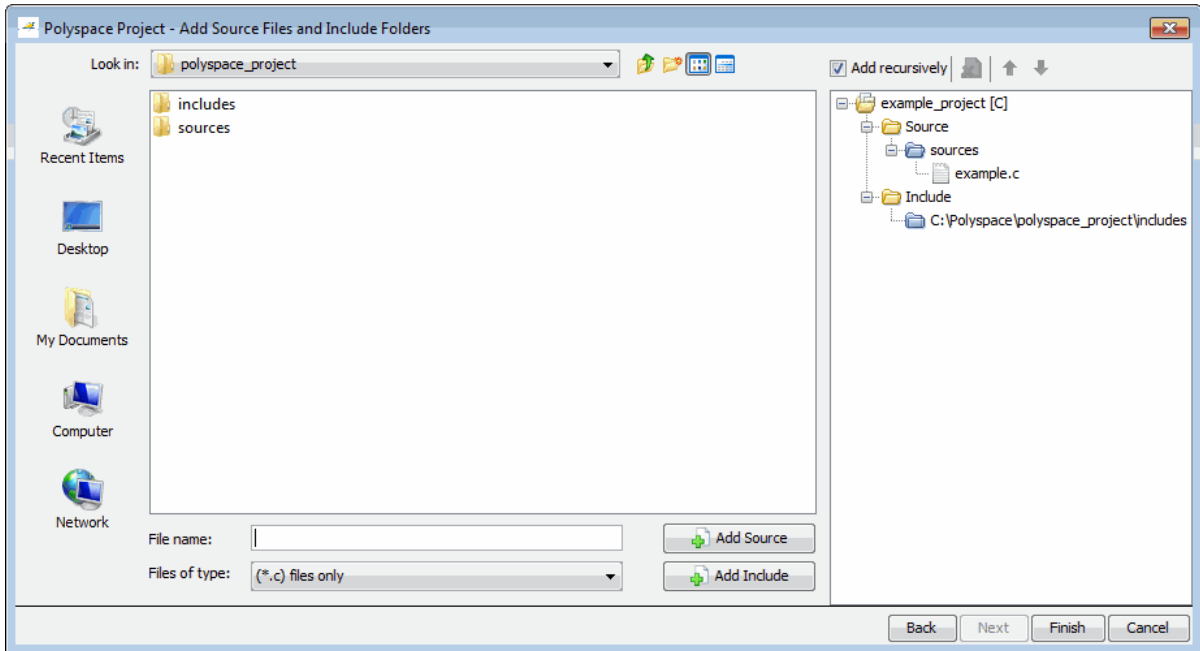

8 If necessary, navigate to the `polyspace_project` folder.

9 Select the `includes` folder. Then click **Add Include**.

The `includes` folder appears in the **Include** tree for `example_project`.

10 Click **Finish**.

11 On the Project Manager toolbar, click .

The verification runs successfully.

Starting Server Verification from Project Manager

In this section...

- “Starting the Verification” on page 3-10
- “Monitoring Progress of the Verification” on page 3-12
- “Removing Verification Results from the Server” on page 3-18
- “Troubleshooting a Failed Verification” on page 3-19

Starting the Verification

In this part of the tutorial, you run the verification on a server.

To start a verification that runs on a server:

- 1 In the Project Manager perspective, on the **Configuration > All Settings** tab, select the **General > Send to Polyspace Server** check box.

Analysis options			
[-] General			
Send to Polyspace Server	<input checked="" type="checkbox"/>		-server
Add to results repository	<input type="checkbox"/>		-add-to-results-repository
Keep all preliminary results files	<input type="checkbox"/>		-keep-all-files
Calculate code metrics	<input type="checkbox"/>		-code-metrics
[-] Report Generation			
Report template name	Developer	▼	-report-template
Output format	RTF	▼	-report-output-format
[-] Target/Compilation			
[-] Compliance with standards			
[-] Polyspace inner settings			
[-] Precision/Scaling			
[-] Multitasking			

- 2 On the Project Manager toolbar, click  .

Note If you see the message **Verification process failed**, click **OK** and go to “Troubleshooting a Failed Verification” on page 3-19.

The verification has three main phases:

- a Checking syntax and semantics (the compile phase). Because Polyspace software is independent of any particular C compiler, it ensures that your code is portable, maintainable, and complies with ANSI® standards.
- b Generating a main if the Polyspace software does not find a main and you have selected the **Generate a Main** option. For more information about generating a main, see “Main Generator Behavior for Polyspace Software” in the *Polyspace Products for C/C++ Reference*.
- c Analyzing the code for run-time errors and generating color-coded results.

The compile phase of the verification runs on the client. When the compile phase is complete:

- You see the message **queued on server** at the bottom of the Project Manager perspective. This message indicates that the part of the verification that takes place on the client is complete. The rest of the verification runs on the server.
- A message in **Output Summary** gives you the identification number (Analysis ID) for the verification. For this verification, the identification number is 1.

Class	Description	File	Line	Col
i	example_project for C verification start at Dec 15, 2010 15:57:15			
i	The generated default DRS XML file "drs-template.xml" can be found in <result_dir...			
i	Analysis ID : 1			

- 3 For information on any message in the log, click the message.


Monitoring Progress of the Verification

There are two ways to monitor the progress of a verification:

- **Using the Project Manager** — Allows you to follow the progress of the verifications you submitted to the server, as well as client verifications.
- **Using the Queue Manager (Spooler)** — Allows you to follow the progress of any verification job in the server queue.

Monitoring Progress Using Project Manager

You can monitor the progress of your verification by viewing the progress monitor and logs at the bottom of the Project Manager perspective.

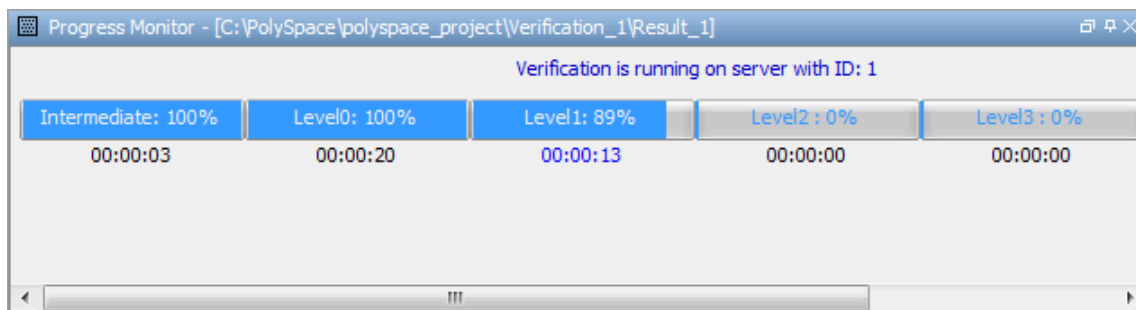

The progress monitor highlights the current phase in blue and displays the amount of time and completion percentage for that phase.

The logs report additional information about the progress of the verification. To view a log, click the button for that log. The information appears in the log display area at the bottom of the Project Manager window. Follow the next steps to view the logs:

- 1 Click the **Output Summary** tab to display compile phase messages and errors. You can search the log by entering search terms in the **Search in the log** box and clicking the left arrows to search backward or the right arrows to search forward.
- 2 Click the **Verification Statistics** tab to display statistics, such as analysis options, stubbed functions, and the verification checks performed.

- 3 Click the **Refresh** button  to update the display as the verification progresses.
- 4 Click the **Full Log** tab to display messages, errors, and statistics for all phases of the verification.

Note You can search the logs. In the **Search in the log** box, enter a search term and click the left arrows to search backward or the right arrows to search forward.

Monitoring Progress Using Queue Manager


You monitor the progress of the verification using the Polyspace Queue Manager (also called the Spooler).

To monitor the verification of Example_Project:

- 1 Double-click the **Polyspace Spooler** icon on the desktop.




The Polyspace Queue Manager Interface opens.

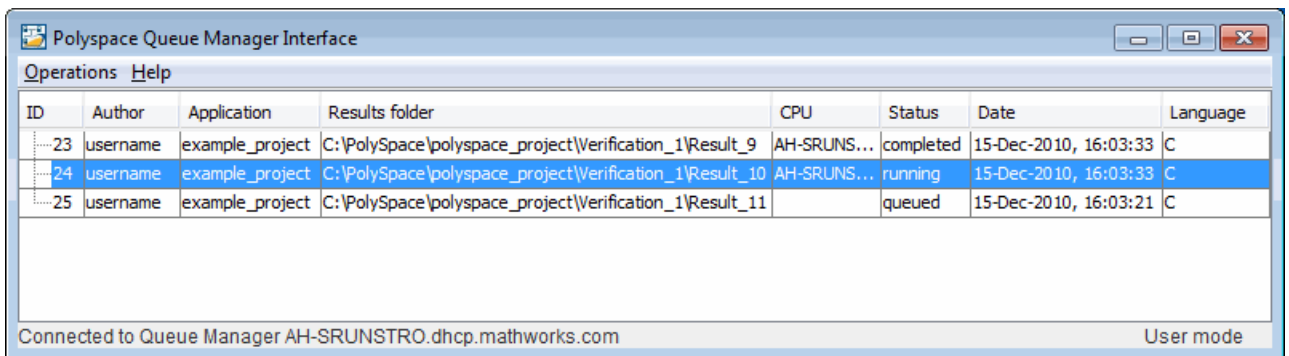

 The screenshot shows a window titled "Polyspace Queue Manager Interface". The window has a menu bar with "Operations" and "Help". Below the menu bar is a table with the following columns: ID, Author, Application, Results folder, CPU, Status, Date, and Language. The table contains three rows of data. The first row (ID 23) is highlighted in blue and shows a "completed" status. The second row (ID 24) is also highlighted in blue and shows a "running" status. The third row (ID 25) shows a "queued" status. At the bottom of the window, there is a status bar that reads "Connected to Queue Manager AH-SRUNSTRO.dhcp.mathworks.com" and "User mode".

ID	Author	Application	Results folder	CPU	Status	Date	Language
23	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_9	AH-SRUNS...	completed	15-Dec-2010, 16:03:33	C
24	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_10	AH-SRUNS...	running	15-Dec-2010, 16:03:33	C
25	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_11		queued	15-Dec-2010, 16:03:21	C

Connected to Queue Manager AH-SRUNSTRO.dhcp.mathworks.com User mode


Tip You can also open the Polyspace Queue Manager Interface by clicking the Polyspace Queue Manager icon  on the Run-Time Checks perspective toolbar.

- 2 Point anywhere in the row for ID 1.
- 3 Right-click to open the context menu for this verification.

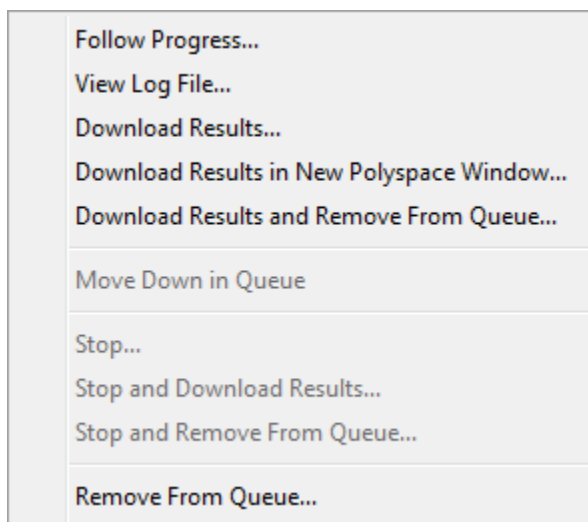


- 4 Select **View log file**.

A window opens displaying the last one-hundred lines of the verification.

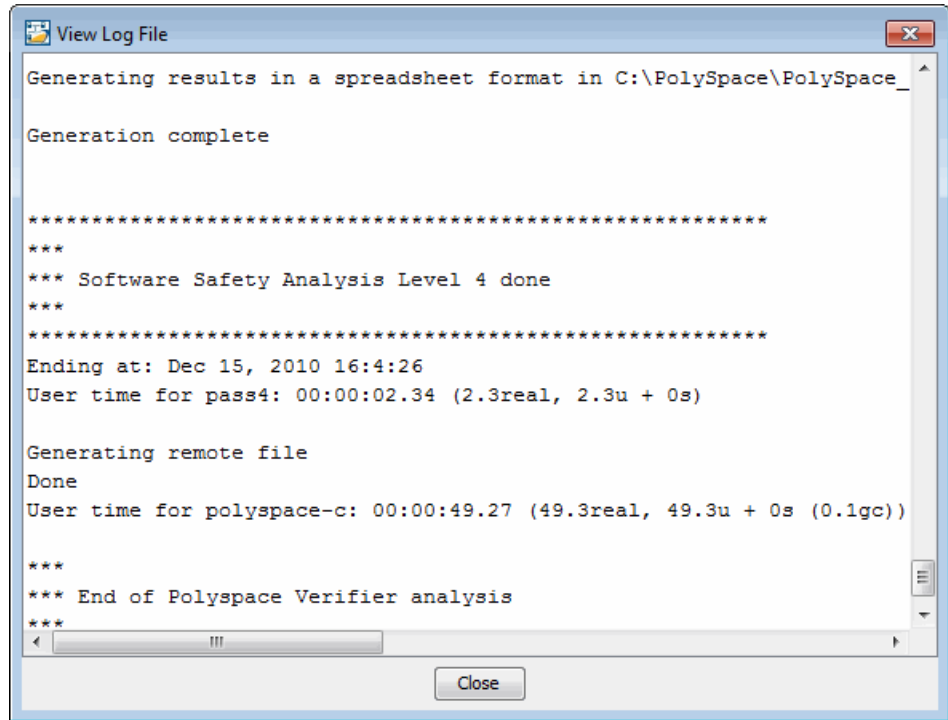


- 5 Click **Close** to close the window.
 - 6 Select **Follow Progress** from the context menu.
- The Progress Monitor opens.

3 Running a Verification

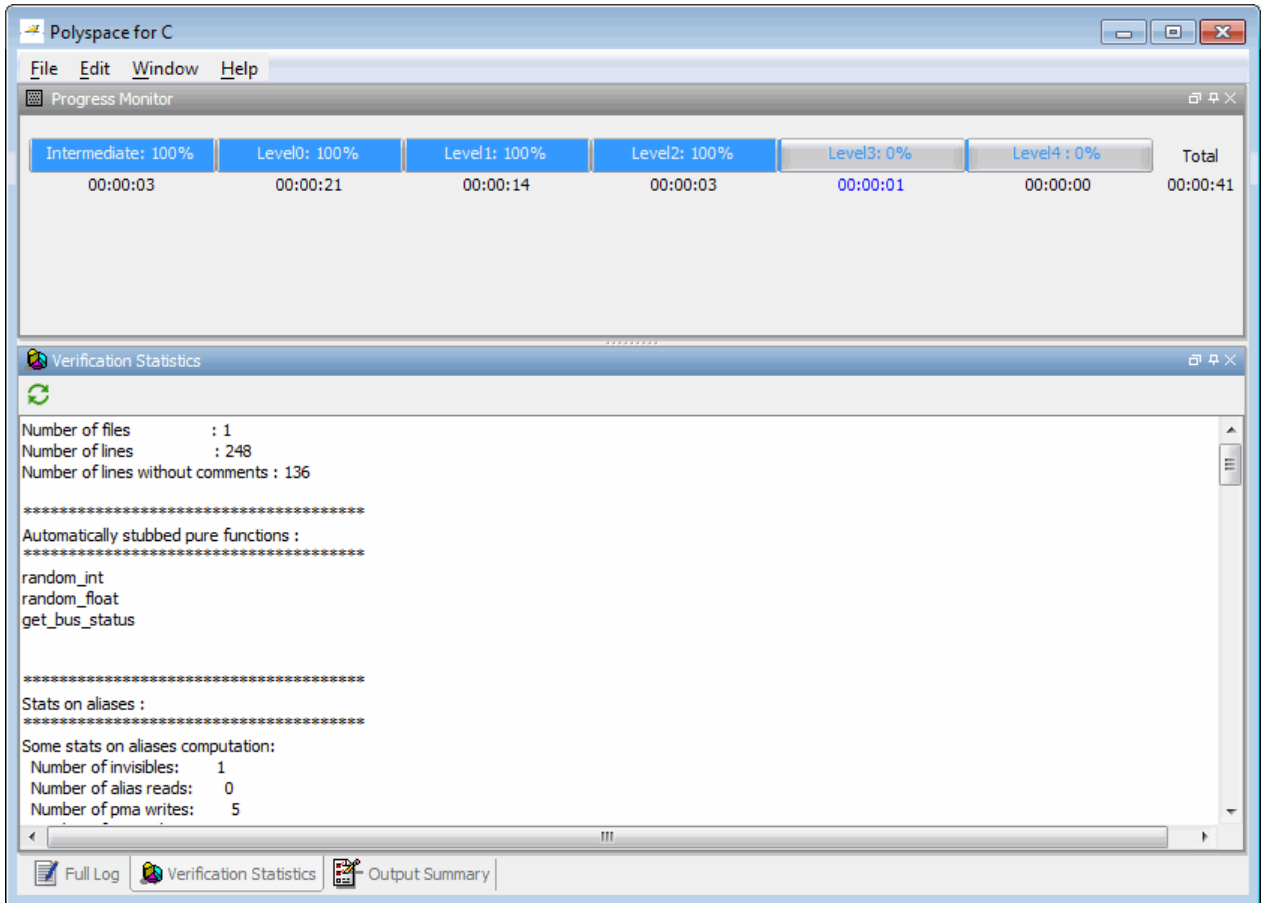

You can monitor the progress of the verification by watching the progress bar and viewing the logs at the bottom of the window. The progress monitor highlights the current phase in blue and displays the amount of time and completion percentage for that phase.

The logs report additional information about the progress of the verification. To view a log, click the button for that log. The information appears in the log display area at the bottom of the Project Manager window. Follow the next steps to view the logs:


- Click the **Output Summary** tab to display compile phase messages and errors. You can search the log by entering search terms in the **Search in the log** box and clicking the left arrows to search backward or the right arrows to search forward.
- Click the **Verification Statistics** tab to display statistics, such as analysis options, stubbed functions, and the verification checks performed.
- Click the **Refresh** button  to update the display as the verification progresses.
- Click the **Full Log** tab to display messages, errors, and statistics for all phases of the verification.

Note You can search the logs. In the **Search in the log** box, enter a search term and click the left arrows to search backward or the right arrows to search forward.

7 Select **File > Quit** to close the progress window.

8 Wait for the verification to finish.

When the verification is complete, the status in the Polyspace Queue Manager Interface changes from running to completed.

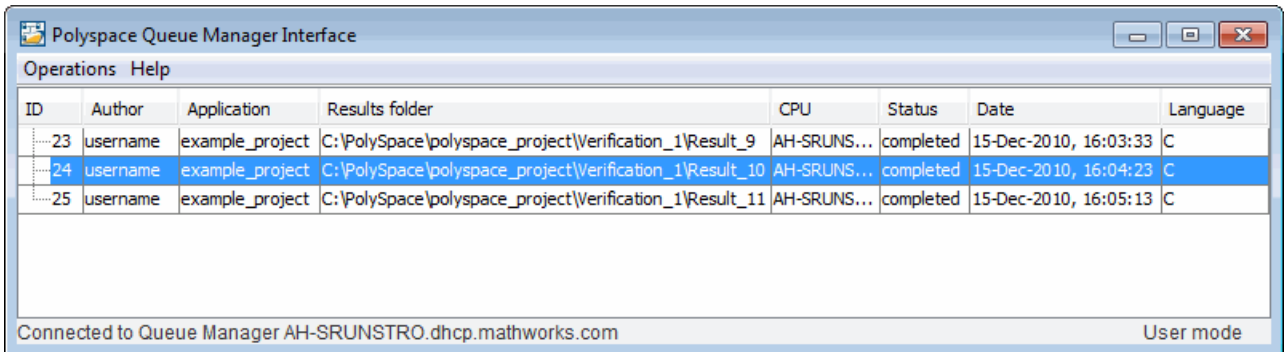

The screenshot shows the Polyspace Queue Manager Interface window. It contains a table with the following data:

ID	Author	Application	Results folder	CPU	Status	Date	Language
23	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_9	AH-SRUNS...	completed	15-Dec-2010, 16:03:33	C
24	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_10	AH-SRUNS...	completed	15-Dec-2010, 16:04:23	C
25	username	example_project	C:\PolySpace\polyspace_project\Verification_1\Result_11	AH-SRUNS...	completed	15-Dec-2010, 16:05:13	C

At the bottom of the window, it says "Connected to Queue Manager AH-SRUNSTRO.dhcp.mathworks.com" and "User mode".

Removing Verification Results from the Server

At the end of a server verification, the server automatically downloads verification results to the results folder specified in the project. You do not need to manually download your results.


Note You can manually download verification results to another location on your client system, or to other client systems.

Verification results remain on the server until you remove them. Once your results have been downloaded to the client, you can remove them from the server queue.

To remove your results from the server:

- 1 In the Polyspace Queue Manager Interface, right-click the verification, and select **Remove From Queue**.

A dialog box opens to confirm that you want to remove the verification from the queue.

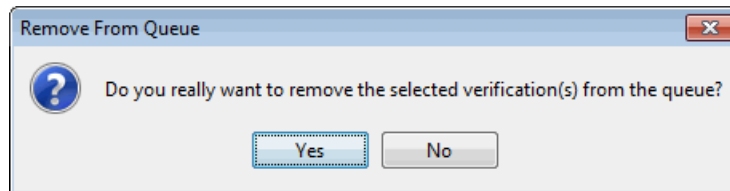

- 2 Click **Yes**.

Note To download the results and remove the verification from the queue, right-click the verification and select **Download Results And Remove From Queue**. If you download results before the verification is complete, you get partial results and the verification continues.

- 3 Select **Operations > Exit** to close the Polyspace Queue Manager Interface.

Once the results are on your client, you can review them using the Run-Time Checks perspective. You review results from the verification in Chapter 4, “Reviewing Verification Results”.

Troubleshooting a Failed Verification

When you see a message that the verification failed, it indicates that Polyspace software could not perform the verification. The following sections present some possible reasons for a failed verification.

Hardware Does Not Meet Requirements

If your computer does not have the minimum hardware requirements, the verification fails. For information about the hardware requirements, go to:

www.mathworks.com/products/polyspaceclientc/requirements.html.

To determine if this is the cause of the failed verification, search the log for the message:

```
Errors found when verifying host configuration.
```

You can:

- Upgrade your computer to meet the minimal requirements.
- In the General section of the Analysis options, select the **Continue with current configuration option** and run the verification again.

You Did Not Specify the Location of Include Files

If you see a message in the log, such as the following, either the files are missing or you did not specify the location of include files.

```
include.h: No such file or folder
```

For information on how to specify the location of include files, see “Creating a New Project to Verify the Example C File” on page 2-7.


Polyspace Software Cannot Find the Server

If you see the following message in the log, Polyspace software cannot find the server.

Error: Unknown host :

Polyspace software uses information in the preferences to locate the server. To find the server information in the preferences:

- 1** Select **Options > Preferences**.
- 2** Select the **Server Configuration** tab.

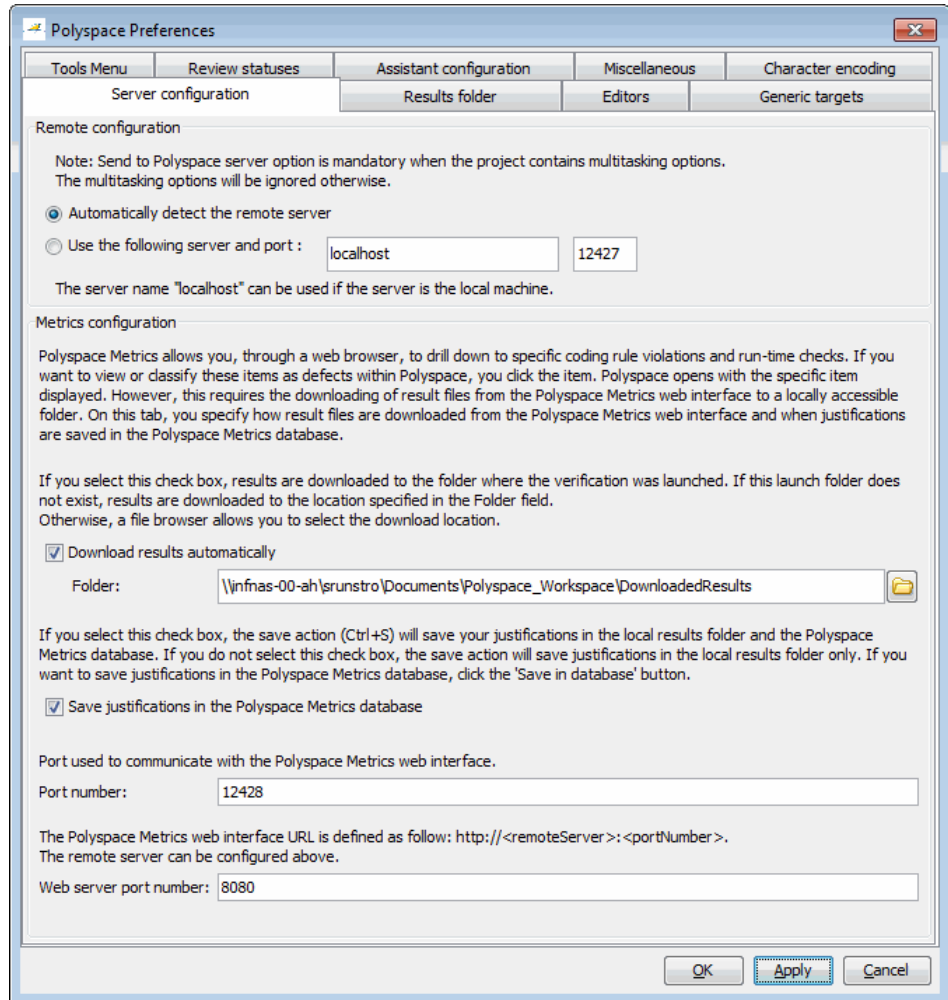

By default, Polyspace software automatically finds the server. You can specify the server by selecting **Use the following server and port** and providing the server name and port. For information about setting up a server, see the *Polyspace Installation Guide*.

Using Polyspace In One Click to Launch Verification

In this section...

“Overview of Polyspace In One Click” on page 3-22

“Setting the Active Project” on page 3-22

“Sending Files to Polyspace Software” on page 3-24

Overview of Polyspace In One Click

In a Microsoft Windows environment, Polyspace software provides a convenient way to streamline your work when you want to verify several files using the same set of options. Once you have set up a project file that has the options that you want, you designate that project as the *active project*, and then send the source files to Polyspace software for verification. You do not have to update the project with source file information. This process is called *Polyspace In One Click*.

In this part of the tutorial, using Polyspace In One Click, you learn how to:

- 1 Set the active project.
- 2 Send files to Polyspace software for verification.

Setting the Active Project


The active project is the project that Polyspace In One Click uses to verify the files that you select. Once you have set an active project, it remains active until you change the active project. Polyspace software uses the analysis options from the project; it does not use the source files or results folder from the project.

To set the active project:


- 1 In the taskbar area of your Windows desktop, right-click the Polyspace In One Click icon:



The context menu appears.

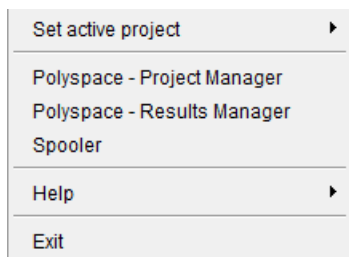

- 2** Select **Set active project > Browse**. The Open Polyspace Project dialog box opens.
- 3** Navigate to polyspace_project.
- 4** Select example_project.cfg.

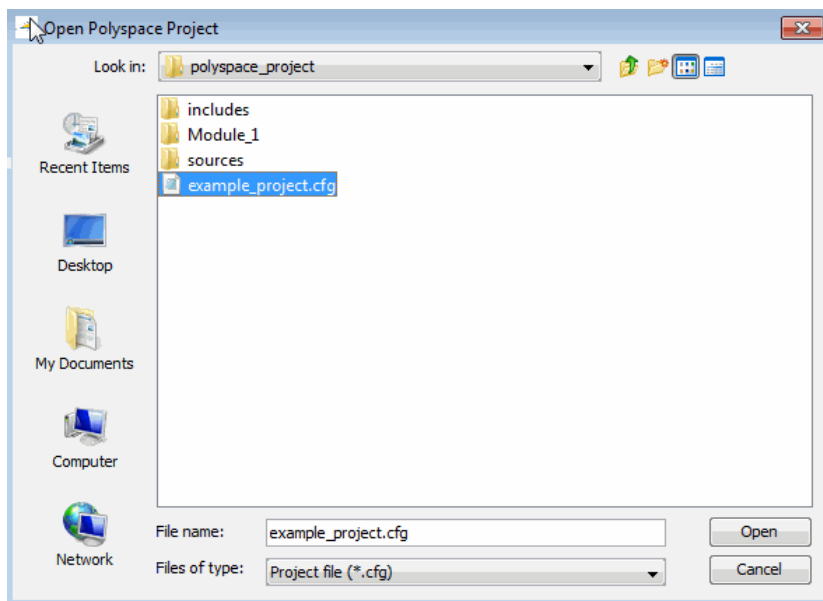

- 5** Click **Open**.


Sending Files to Polyspace Software

You can send several files to Polyspace software for verification. For this tutorial, you send one file, `example.c`.


To send `example.c` to Polyspace software for verification:

- 1 Navigate to the folder `polyspace_project\sources`.
- 2 Right-click the file `example.c`.

The context menu appears.

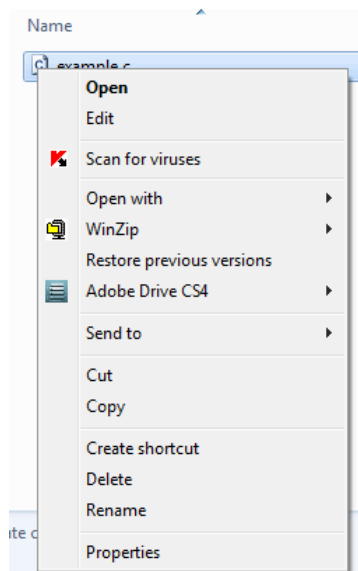


- 3 Select **Send To > Polyspace**.

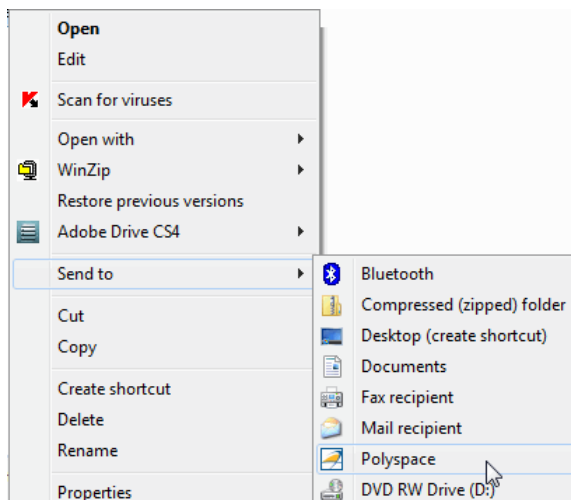

The Polyspace Language Selection dialog box opens.

4 Select **Polyspace for C/C++**.


5 If the results folder has previous results, you see a dialog box.

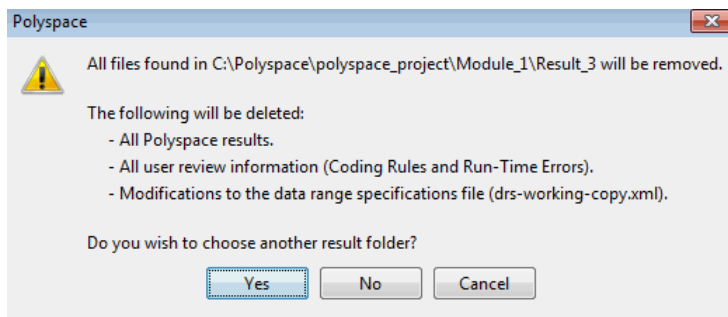


6 Click either **Yes** or **No**.

If you click **Yes**, the Choose a Result Folder dialog box opens. Use this dialog box to navigate to, and select the required results folder.

The verification starts and, after the following message, runs “silently” to completion.

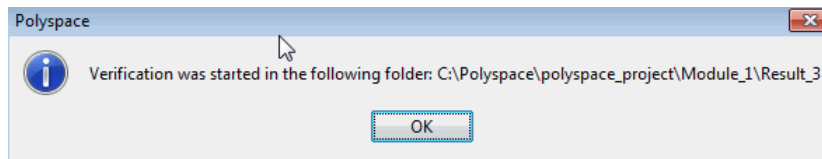

To view results:

- 1 Right-click the Polyspace In One Click icon .
- 2 From the context menu, select **Polyspace - Project Manager**.
- 3 From the Polyspace Language Selection dialog box, select **Polyspace for C/C++**. The Project Manager perspective of the Polyspace verification environment opens.
- 4 In the **Project Browser** pane, from the results folder, double-click the results file, for example, RTE_px_example_project_LAST_RESULTS.rte. The Results Manager perspective opens displaying the verification results.

Launching Client Verification from Project Manager

In this section...

“Starting the Verification” on page 3-27

“Monitoring the Progress of the Verification” on page 3-29

“Completing Verification” on page 3-30

“Stopping the Verification Before It is Complete” on page 3-31

Starting the Verification

For the best performance, run verifications on a server. If the server is busy or you want to verify a small file, you can run a verification on a client.

Note Because a verification on a client can process only a limited number of variable assignments and function calls, the source code should have no more than 800 lines of code.


To start a verification that runs on a client:

- 1 If the project `example_project.cfg` is not already open, open the project.

For information about opening a project, see “Preparing for Verification” on page 3-4.

- 2 In the Project Manager perspective, on the **Configuration > All Settings** tab, clear the **General > Send to Polyspace Server** check box.

Analysis options		
[-] General		
Send to Polyspace Server	<input checked="" type="checkbox"/>	-server
Add to results repository	<input type="checkbox"/>	-add-to-results-repository
Keep all preliminary results files	<input type="checkbox"/>	-keep-all-files
Calculate code metrics	<input type="checkbox"/>	-code-metrics
[-] Report Generation		
Report template name	Developer	-report-template
Output format	RTF	-report-output-format
[+] Target/Compilation		
[+] Compliance with standards		
[+] Polyspace inner settings		
[+] Precision/Scaling		
[+] Multitasking		


- 3 On the Project Manager toolbar, click .
- 4 If you see a caution that Polyspace software will remove existing results from the results folder, click **Yes** to continue and close the message dialog box.

The Output Summary and Progress Monitor windows become active, allowing you to monitor the progress of the verification.

Note If you see the message *Verification process failed*, click **OK** and go to “Troubleshooting a Failed Verification” on page 3-19.


Monitoring the Progress of the Verification

You can monitor the progress of the verification by viewing the progress monitor and logs at the bottom of the Project Manager perspective.

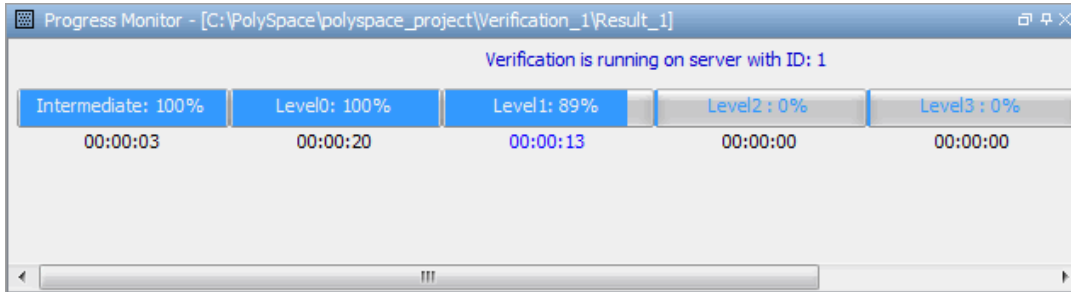

The progress monitor highlights the current phase in blue and displays the amount of time and completion percentage for that phase.


The logs report additional information about the progress of the verification. To view a log, click the button for that log. The information appears in the log display area at the bottom of the Project Manager window. Follow the next steps to view the logs:

- 1 Click the **Output Summary** tab to display compile phase messages and errors. You can search the log by entering search terms in the **Search in the log** box and clicking the left arrows to search backward or the right arrows to search forward.
- 2 Click the **Verification Statistics** tab to display statistics, such as analysis options, stubbed functions, and the verification checks performed.
- 3 Click the **Refresh** button  to update the display as the verification progresses.
- 4 Click the **Full Log** tab to display messages, errors, and statistics for all phases of the verification.

Note You can search the logs. In the **Search** field, enter a search term and click the left arrows to search backward or the right arrows to search forward.

Completing Verification

When the verification is complete, the message End of Polyspace Verifier analysis appears in **Full Log**, and the results file appears in the **Project Browser** pane.

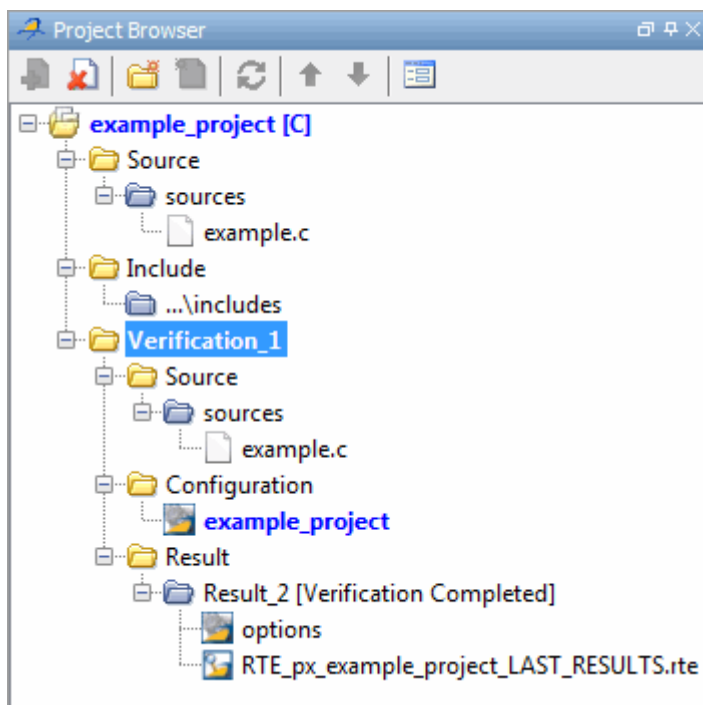


In the tutorial Chapter 4, “Reviewing Verification Results”, you open the Results Manager perspective and review the verification results.


Stopping the Verification Before It is Complete

You can stop the verification before it is complete. If you stop the verification, results are incomplete. If you start another verification, the verification starts from the beginning.

To stop a verification:

- 1 On the Project Manager toolbar, click the **Stop** button 

A warning dialog box opens.

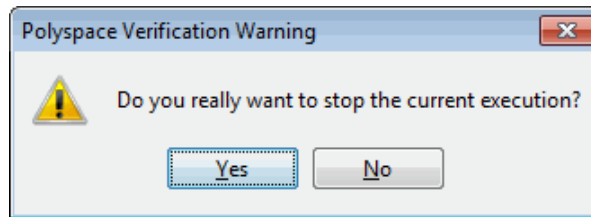

- 2 Click **Yes**. The verification stops.
- 3 Click **OK** to close the **Message** dialog box.

Note Closing the Polyspace verification environment window does *not* stop the verification. To resume display of the verification progress, start the Polyspace software and open the project.

Reviewing Verification Results

- “About Reviewing Verification Results Tutorial” on page 4-2
- “Opening Verification Results” on page 4-3
- “Exploring Results Manager perspective” on page 4-4
- “Reviewing Results” on page 4-8
- “Reviewing Results Systematically” on page 4-24
- “Automatically Testing Unproven Code” on page 4-30
- “Generating Reports of Verification Results” on page 4-31

About Reviewing Verification Results Tutorial

In this section...
“Overview” on page 4-2
“Before You Start” on page 4-2

Overview

In the previous tutorial, Chapter 3, “Running a Verification” , you completed a verification of `example.c`. In this tutorial, you explore the verification results.

The Polyspace verification environment contains a Results Manager perspective, which you use to review results. In this tutorial, you learn:

- 1 How to use the Results Manager perspective, including how to:
 - Open the Results Manager perspective and view verification results.
 - Review results
 - Generate reports.
- 2 How to interpret the color-coding that Polyspace software uses to identify the severity of an error.
- 3 How to find the location of an error in the source code.

Before You Start

Before starting this tutorial, be sure to complete the tutorial Chapter 3, “Running a Verification”.

In this tutorial, you use the verification results in this file:

```
polyspace_project\Verification_(1)\Result_(1)\  
RTE_px_example_project_LAST_RESULTS.rte.
```


Opening Verification Results

In this section...
“Opening Results Manager perspective” on page 4-3
“Opening Verification Results” on page 4-3

Opening Results Manager perspective

Use the Results Manager perspective to review verification results.

To open the Results Manager perspective:

- In the Polyspace verification environment toolbar, select the **Results Manager** button .

Opening Verification Results

To open the verification results:

- 1** In the Polyspace verification environment, select **File > Open Result**.

The Open results dialog box opens.

- 2** Navigate to the results folder:

```
polyspace_project\Module_(1)\Result_(1).
```

- 3** Select the file RTE_px_example_project_LAST_RESULTS.rte.

- 4** Click **Open**. The results appear in the Results Manager perspective.

Note You can also open results from the Project Manager perspective by double-clicking the results file in the Project Browser.

Exploring Results Manager perspective


In this section...

“Overview” on page 4-4

“Reviewing the Results Explorer Tab” on page 4-5

Overview

The Results Manager perspective looks like the following figure.

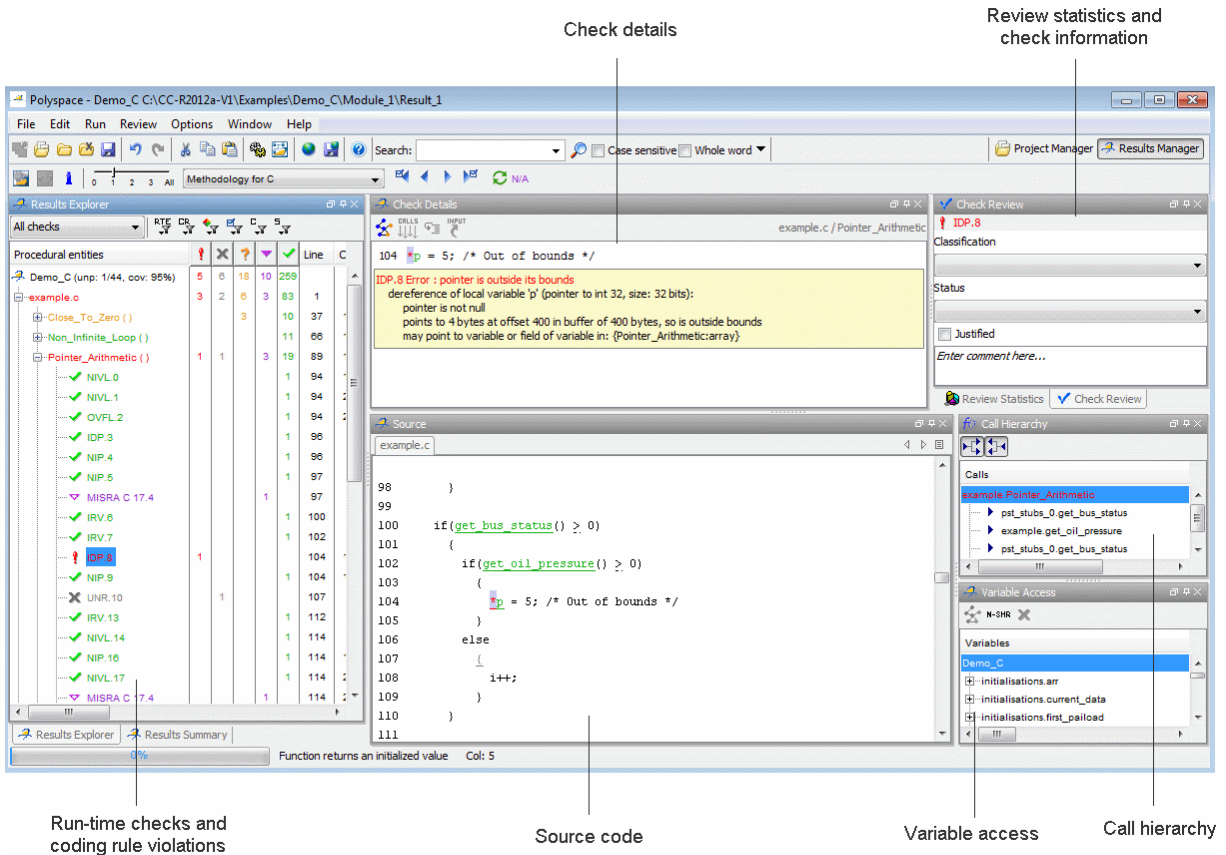

The Results Manager perspective has six sections below the toolbar. Each section provides a different view of the results. The following table describes these views.


This Pane or Tab ...	Displays ...
Results Explorer\Results Summary (Procedural entities view)	List of the checks (diagnostics) for each file and function in the project
Source (Source code view)	Source code for a selected check in the procedural entities view
Check Details (Selected check view)	Details about the selected check
Check Review\Review Statistics (Coding review progress view)	Review information about the selected check Statistics about the review progress for checks with the same type and category as the selected check
Variable Access (Variables view)	Information about global variables declared in the source code
Call Hierarchy (Call tree view)	Tree structure of function calls

You can resize or hide any of these sections. You learn more about the Results Manager perspective later in this tutorial.

Reviewing the Results Explorer Tab



The **Results Explorer** tab displays a table with information about the diagnostics for each file in the project. The **Results Explorer** tab is also called the Procedural entities view

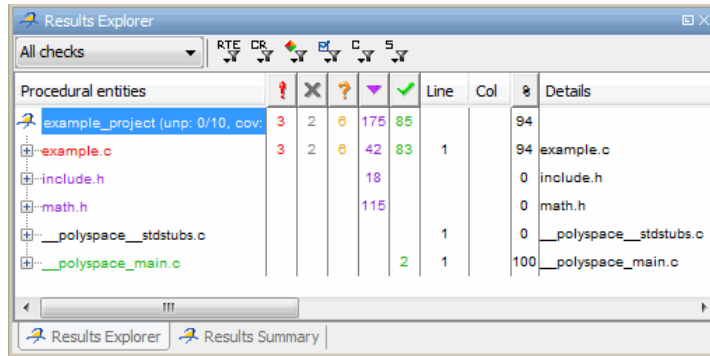When you first open the results file from the verification of `example.c`, you see the following procedural entities.



The file `example.c` is red because it has a run-time error. Polyspace software assigns each file the color of the most severe error found in that file. The first column of the table in the Procedural Entities view is the procedural entity (the file or function). The following table describes some of the other columns in the procedural entities view.

Column Heading	Indicates
	Number of red checks (operations where an error always occurs)
	Number of gray checks (unreachable code)
	Number of orange checks (warnings for operations where an error might occur)
	Number of purple checks (coding rule violations)

Column Heading	Indicates
	Number of green checks (operations where an error never occurs)
	Selectivity of the verification (percentage of checks that are not orange) This is an indication of the level of proof.

Note You can select which columns appear in the procedural entities view by editing the preferences.

What you select in the procedural entities view determines what you see in the other views. In the following examples, you learn how to use the views and how they interact.

Reviewing Results

In this section...
“What are Review Levels?” on page 4-8
“Displaying All Checks” on page 4-9
“Reviewing All Checks” on page 4-9
“Reviewing Additional Examples of Checks” on page 4-15
“Filtering Checks” on page 4-20

What are Review Levels?

To facilitate your review of verification results, Polyspace allows you to specify the type of results displayed in the **Procedural entities** and **Source** views of the Results Manager perspective. You can specify:

- Type of coding rule violations, that is, purple checks
- Type and number of orange run-time checks

There are five levels at which you can review your results:

- 0 — The software displays violations of coding rules with state **Error** and red and gray run-time checks. You can configure the software to display orange checks that are potential run-time errors. Through the **Polyspace Preferences > Review Configuration** tab, specify the categories of potential run-time errors that you want the software to display. By default, the software does not display any orange checks at this level. See “Reviewing Checks at Level 0” on page 4-24.

This level is suitable for the review of fresh code.


- 1, 2, and 3 — The software displays all purple checks and red, gray, and green run-time checks. The software displays orange checks according to values specified on the **Polyspace Preferences > Review Configuration**. You can use either a predefined methodology or a custom methodology to specify the number of orange checks per check category. See “Reviewing Checks at Levels 1, 2, and 3” on page 4-25.

For a predefined methodology, these levels are suitable for reviews at the following stages of the development process.

Level	Development Stage
1	Fresh code
2	Unit tested code
3	Code Review

- All — The software displays all purple checks *and* red, gray, green, and orange checks. When you want to carry out an exhaustive review of your verification results, use this level. See “Reviewing All Checks” on page 4-9.

The toolbar in the Results Manager perspective provides controls specific to review levels.



The controls include:

- A slider for selecting the review level — 0, 1, 2, 3, or All. By default, the Results Manager perspective opens at level 1.
- A menu for selecting the review methodology for levels 1, 2, and 3.
- Arrows for navigating through checks.

Displaying All Checks

By default, the Results Manager perspective opens at level 1. To display all checks in the Procedural entities view, move the Review Level slider to All.

Reviewing All Checks

In this part of the tutorial, you learn how to use the Results Manager perspective to examine verification checks. This part of the tutorial covers:

- “Selecting a Check to Review” on page 4-10
- “Displaying the Calling Sequence” on page 4-12
- “Tracking Review Progress” on page 4-12

Selecting a Check to Review

In the procedural entities view, `example.c` is red, indicating that this file has at least one red check. To review a red check in `example.c`:

- 1 In the procedural entities section of the **Results Explorer** tab, expand `example.c`.
- 2 Expand the red procedure `Pointer_Arithmetic()`.


A color-coded list of the checks performed on `Pointer_Arithmetic()` opens.

Pointer_Arithmetic ()	1	1	1	16	89	12	95	example.c
✓ NIVL.5				1	94	13		Local variable is initialized (type: int 32)
✓ NIVL.3				1	94	22		Local variable is initialized (type: int 32)
✓ OVFL.4				1	94	23		Operation [+] on scalar does not overflow in INT32 range
✓ IDP.1				1	96	6		Pointer is within its bounds
✓ NIP.0				1	96	7		Pointer is initialized
✓ NIP.2				1	97	6		Pointer is initialized
! IDP.9	1				104	10		Error : pointer is outside its bounds
✓ NIP.8				1	104	11		Pointer is initialized
✗ UNR.23			1		107	8		Unreachable code
✓ NIVL.16				1	114	6		Local variable is initialized (type: int 32)
? IDP.15			1		114	16		Warning : pointer may be outside its bounds
✓ NIP.14				1	114	18		Pointer is initialized
✓ NIVL.13				1	114	20		Local variable is initialized (type: int 32)
✓ NIVL.22				1	116	11		Local variable is initialized (type: int 32)
✓ NIVL.21				1	116	18		Local variable is initialized (type: int 32)
✓ NIP.18				1	118	10		Pointer is initialized
✓ NIVL.17				1	118	14		Local variable is initialized (type: int 32)
✓ IDP.20				1	119	6		Pointer is within its bounds
✓ NIP.19				1	119	7		Pointer is initialized

In the list of checks, each item has an acronym and a number. The acronym identifies the check type. For example, in `IDP.9`, `IDP` stands for `Illegal Dereferenced Pointer`. For more information, see “Check Descriptions for C Code” in the *Polyspace Products for C/C++ Reference*.

- 3 Click the red `IDP.9`.

The **Source** pane displays the section of source code where this error occurs.

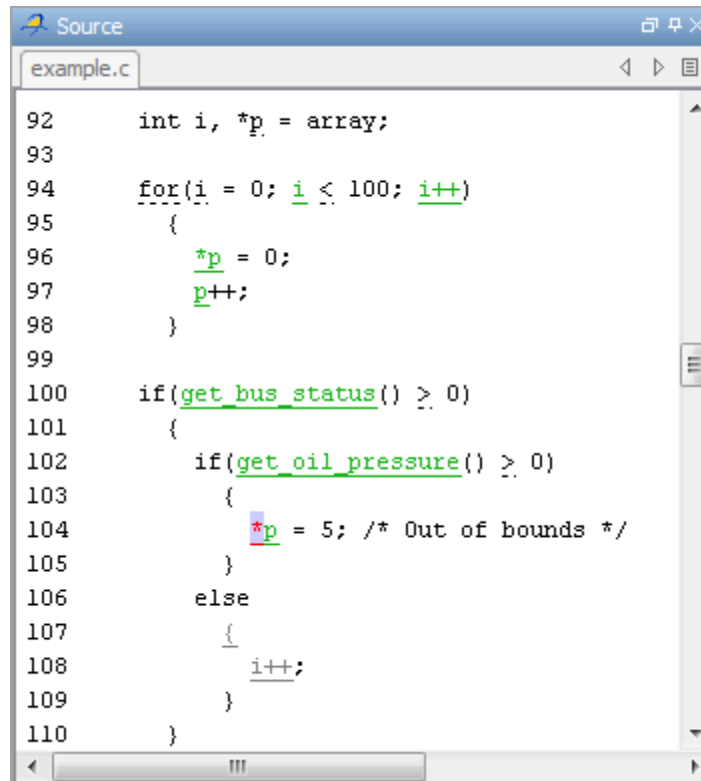


```
92     int i, *p = array;
93
94     for(i = 0; i < 100; i++)
95     {
96         *p = 0;
97         p++;
98     }
99
100    if(get_bus_status() >= 0)
101    {
102        if(get_oil_pressure() >= 0)
103        {
104            *p = 5; /* Out of bounds */
105        }
106        else
107        {
108            i++;
109        }
110    }
```

- 4** At line 104 of the code, click the red code.


An error message box opens indicating that when the pointer `p` is dereferenced, it is outside of its bounds. At line 92, `p` points to the start of array which has 100 elements. The for loop starting at line 94 initializes the elements of array to 0. This for loop leaves `p` pointing to the location after the last element of array.

Displaying the Calling Sequence

You can display the calling sequence that leads to the code associated with a check. To see the calling sequence for the red IDP.9 check in `Pointer_Arithmetic()`:

- 1 Expand `Pointer_Arithmetic()`.
- 2 Click the red IDP.9.
- 3 Click the **call graph** button  in the Check Review toolbar.

A window displays the call graph.

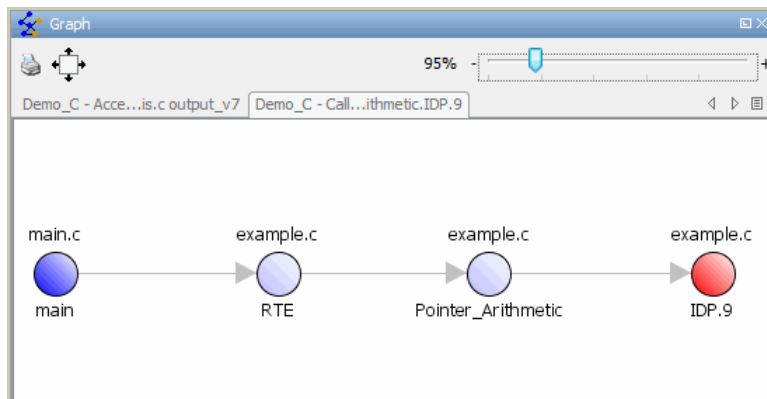


The code associated with IDP.9 is in `Pointer_Arithmetic`. The generated main function calls RTE, which calls `Pointer_Arithmetic`.

Tracking Review Progress

You can keep track of the checks that you have reviewed by marking them. To mark that you have reviewed the red IDP.9 check in `Pointer_Arithmetic()`:

- 1 Expand `Pointer_Arithmetic()`.
- 2 Click the red IDP.9.

The **Review Statistics** tab displays a table with statistics about the review progress for that category and severity of error.

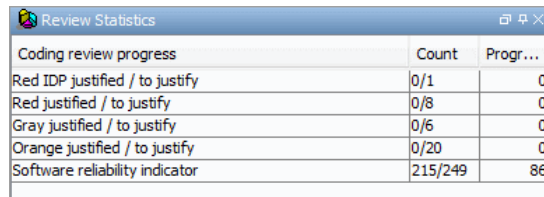

Category	Count	Progr...
Coding review progress		
Red IDP justified / to justify	0/1	0
Red justified / to justify	0/8	0
Gray justified / to justify	0/6	0
Orange justified / to justify	0/20	0
Software reliability indicator	215/249	86


The **Count** column displays a ratio and the **Progress** column displays the equivalent percentage.

The first row displays the ratio of justified checks to total checks that have the same color and category as the current check. In this example, the first row displays the ratio of reviewed red IDP checks to total red IDP errors in the project.

The second row displays the ratio of justified checks to total checks that have the same color as the current check. In this example, this ratio is the ratio of red errors reviewed to total red errors in the project.

The last row displays the ratio of the number of green checks to the total number of checks, providing an indicator of the reliability of the software.

Information about the current check (the red IDP.9) appears in the **Check Details** pane (selected check view).

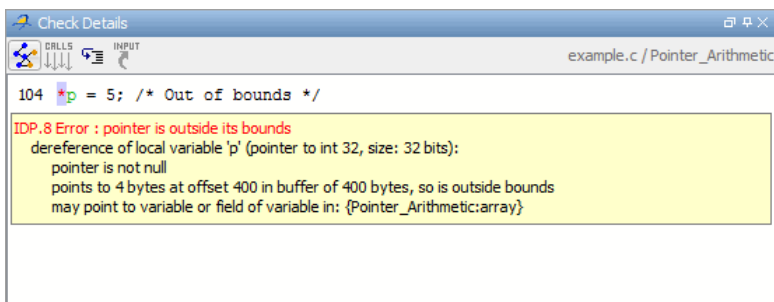

3 After you review the check, from the **Check Review** tab, select a **Classification** to describe the severity of the issue:

- High
- Medium

- Low
- Not a defect


4 From the **Check Review** tab, select a **Status** to describe how you intend to address the issue:

- Fix
- Improve
- Investigate
- Justify with annotations
- No Action Planned
- Other
- Restart with different options
- Undecided

Note You can also define your own statuses. See “Defining Custom Status”.

- 5** On the **Check Review** tab, in the comment box, enter additional information about the check.
- 6** Select the check box to indicate that you have justified this check.

The **Coding review progress** part of the window updates the ratios of errors reviewed to total errors.

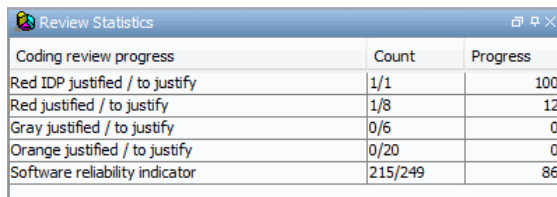

Coding review progress	Count	Progress
Red IDP justified / to justify	1/1	100
Red justified / to justify	1/8	12
Gray justified / to justify	0/6	0
Orange justified / to justify	0/20	0
Software reliability indicator	215/249	86

Reviewing Additional Examples of Checks

In this part of the tutorial, you learn about other types and categories of errors by reviewing the following examples in `example.c`:


- “Example: Unreachable Code” on page 4-16
- “Example: Arithmetic Error” on page 4-17
- “Example: A Function with No Errors” on page 4-18
- “Example: Division by Zero” on page 4-18

Example: Unreachable Code

Unreachable code is code that never executes. Polyspace software displays unreachable code in gray. In the following example, you look at an example of unreachable code.

- 1 In **Procedural Entities**, click `Unreachable_Code()`.

The source code view displays the source code for this function.

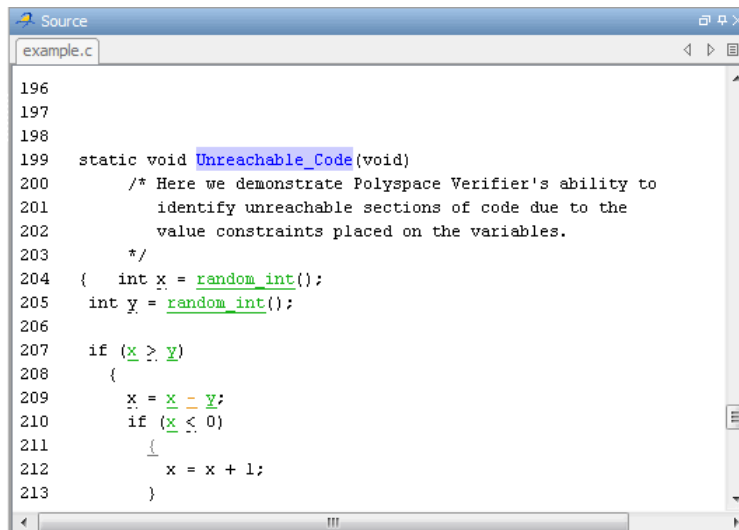

```
196
197
198
199 static void Unreachable_Code(void)
200 /* Here we demonstrate Polyspace Verifier's ability to
201 identify unreachable sections of code due to the
202 value constraints placed on the variables.
203 */
204 { int x = random_int();
205 int y = random_int();
206
207 if (x >= y)
208 {
209 x = x - y;
210 if (x < 0)
211 {
212 x = x + 1;
213 }
214 }
215 }
```

- 2 Examine the source code.


At line 210, the condition `x < 0` is always false. The curly bracket `{` is gray because the branch is never executed.

Example: Arithmetic Error

In the following example, Polyspace software detects a memory corruption error:

- 1 In the Procedural entities view, expand the red `Square_Root()` function.

The source code view displays the source code for this function.

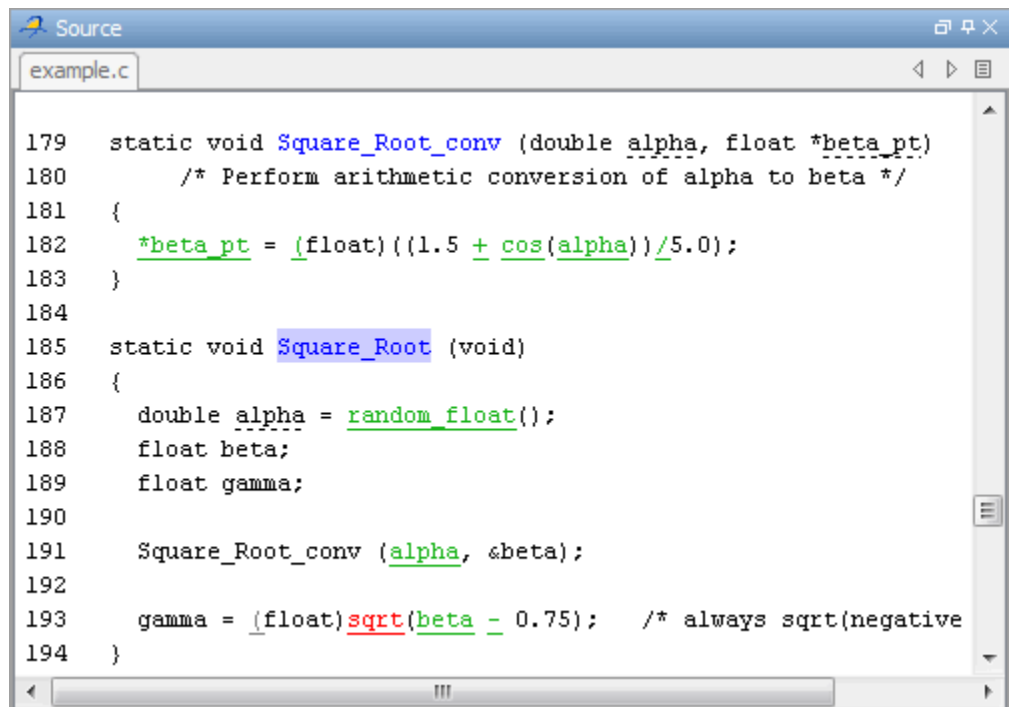

```
179 static void Square_Root_conv (double alpha, float *beta_pt)
180     /* Perform arithmetic conversion of alpha to beta */
181 {
182     *beta_pt = (float)((1.5 + cos(alpha))/5.0);
183 }
184
185 static void Square_Root (void)
186 {
187     double alpha = random_float();
188     float beta;
189     float gamma;
190
191     Square_Root_conv (alpha, &beta);
192
193     gamma = (float)sqrt(beta - 0.75); /* always sqrt(negative
194 }
```

- 2 Examine the source code.


Because `beta` is always less than 0.75, the argument to the `sqrt()` function at line 193 is always negative.

Example: A Function with No Errors

In the following example, Polyspace software verifies code with a large number of iterations, and determines that the loop terminates and a variable does not overflow:

- 1 In Procedural entities, click the green `Non_Infinite_Loop()` function.

The source code view displays the source code for this function.

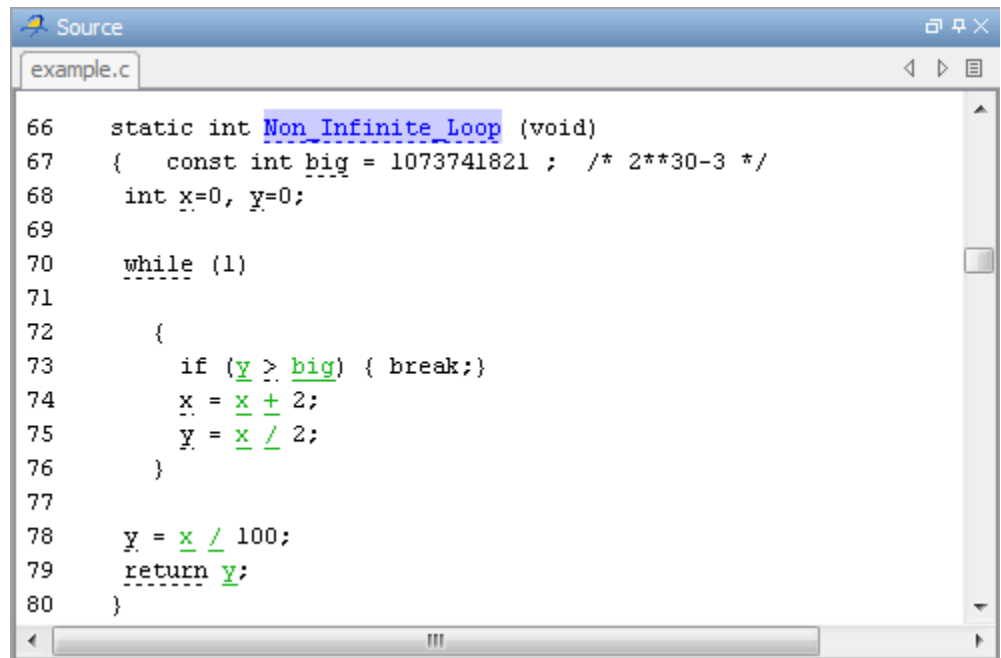

```
66 static int Non_Infinite_Loop (void)
67 { const int big = 1073741821 ; /* 2**30-3 */
68   int x=0, y=0;
69
70   while (1)
71
72     {
73       if (y > big) { break;}
74       x = x + 2;
75       y = x / 2;
76     }
77
78   y = x / 100;
79   return y;
80 }
```

- 2 Examine the source code. The variable `x` never overflows because the `while` loop at line 70 terminates before `x` can overflow.

Example: Division by Zero

In the following example, Polyspace software detects division by zero:

- 1 In Procedural entities, expand `Recursion()`.

The source code view displays the source code for this function.

2 Examine the Recursion() function.

When Recursion() is called with depth less than zero, the code at line 142 results in division by zero. The orange color indicates that this operation is a potential error (depending on the value of depth).

3 Examine the red Recursion_caller function.

The first call to Recursion() at line 157 is red because it calls Recursion() with depth less than zero, causing a division by zero. The

second call to `Recursion()` at line 164 does not cause division by zero because it calls `Recursion()` with `depth` greater than zero.

Filtering Checks

You can filter the checks that you see in the Results Manager perspective so that you can focus on certain checks. Polyspace software allows you to filter your results in several ways. You can filter:

- Run-time checks or coding rule violations
- Run-time checks by category (for example, ZDV, IDP, and NIP)
- Violations of selected coding rules
- Run-time checks by color (gray, orange, green)
- Justified or unjustified checks
- Checks by classification
- Checks by status


To filter checks, on the Results Explorer toolbar, select one of the following filters.



Tip The tooltip for a filter button indicates what the filter does.


Example: Filtering Coding Rule Violations


To hide all coding rule violations, on the Results Explorer toolbar, from the drop-down list of the first filter, select `Run-time checks`.



The software hides all coding rule violations and displays only run-time checks.

To filter violations of a specific coding rule:

- 1 On the Results Explorer toolbar, click the coding rules filter icon .
- 2 From the drop-down menu, clear the check box for the coding rule, for example, 5.4.

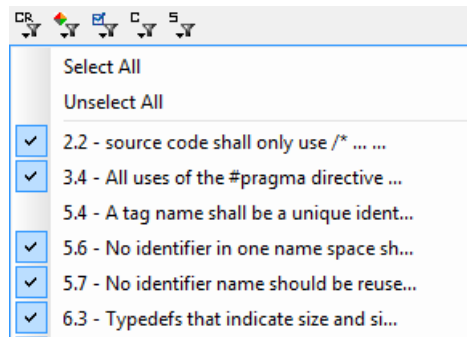

The software does not display violations of this rule.


Example: Filtering IRV Checks

You can use an RTE filter to hide a given check category, such as IRV. When a filter is enabled, you do not see that check category.

To filter IRV checks:


- 1 Expand `Square_Root()`.

`Square_Root()` has five checks: four are green and one is red.




- 2 Click the **RTE filter** icon .

3 Clear the IRV option.

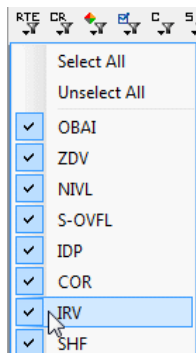

The software hides the IRV check for `Square_Root()`.



4 Select the IRV option to redisplay the IRV check.

Note When you filter a check category, red checks of that category are not hidden. For example, if you filter IDP checks, you still see IDP.9 under `Pointer_Arithmetic()`.


Example: Filtering Green Checks

You can use a Color filter to hide certain color checks. When a filter is enabled, you do not see that color check.


To filter green checks:

1 Expand `Square_Root()`.


`Square_Root()` has five checks: four are green and one is red.



- 2 Click the **Color filter** icon .
- 3 Clear the **Green Checks** option.

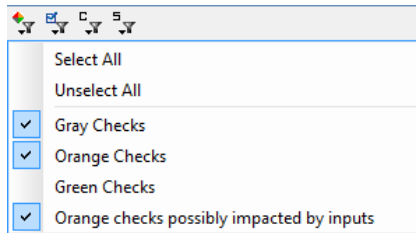

The software hides the green checks.



Reviewing Results Systematically

In this section...

“Reviewing Checks at Level 0” on page 4-24

“Reviewing Checks at Levels 1, 2, and 3” on page 4-25

“Reviewing Checks Progressively” on page 4-27


Reviewing Checks at Level 0

At this level, in addition to red and gray checks, you can focus on orange checks that Polyspace identifies as potential run-time errors. These potential run-time errors fall into three categories:

- **Path** — The software identifies orange checks that are path-related issues, which are not dependent on input values.
- **Path and bounded input** — Default. In addition to orange checks that are path-related issues, the software identifies orange checks that are related to bounded input values.
- **All** — In addition to path-related and bounded input orange checks, the software identifies orange checks that are related to unbounded input values.

To specify the potential run-time error category for level 0:

- 1 In the Polyspace verification environment, select **Options > Preferences**. The Polyspace Preferences dialog box opens.
- 2 Select the **Review configuration** tab.
- 3 From the **Level** drop-down list, select your category.



The default is **Path** and **bounded** input. If you select **None**, the software displays only red and gray checks.

- 4 Click **OK** to save your options and close the Polyspace Preferences dialog box.

To select review level 0, in the Run-Time Checks toolbar, move the Review Level slider to **0**.


Reviewing Checks at Levels 1, 2, and 3

In addition to red, gray, and green checks, the software displays orange checks according to values specified on the **Review Configuration** tab in the Polyspace Preferences dialog box. See “Viewing Methodology Requirements for Levels 1, 2, and 3” on page 4-26

You can use either a predefined methodology or a custom methodology to specify the number of orange checks per check category.

To select a predefined methodology and review level:

- 1 From the Results Manager perspective, select **Options > Preferences**. The Polyspace Preferences dialog box opens.
- 2 Select the **Review configuration** tab.
- 3 From the **Methodology** drop-down list, select, for example, **Methodology for C**.



- 4 Move the Review Level slider to the appropriate level, for example, level **1**.



Viewing Methodology Requirements for Levels 1, 2, and 3

In this part of the tutorial, you examine **Methodology for C**, which defines the number of orange checks that you review at levels 1, 2, or 3.

To examine the configuration for **Methodology for C**:

- 1 In the Polyspace verification environment, select **Options > Preferences**.

The Polyspace Preferences dialog box opens.

- 2 Select the **Review configuration** tab.

- 3 From the **Methodology** drop-down list, select Methodology for C.


In the section **Levels 1, 2, and 3**, a table shows the number of orange checks that you review for a given level and check category.

Levels 1, 2, and 3			
	Level 1	Level 2	Level 3
Common			
ZDV	5	20	ALL
NIVL	10	50	ALL
S-OVFL	10	50	ALL
COR		10	10
NIV		0	10
F-OVFL	5	10	20
ASRT		5	20
C & C++ only			
OBAI	10	20	ALL
SHF	5	10	ALL
IDP		10	20
NIP		10	20
STD_LIB			
C only			
IRV	5	20	ALL

For example, the table specifies that you review five orange ZDV checks when you select level 1. The number of checks increases as you move from level 1 to level 3, reflecting the changing review requirements as you move through the development process.

- 4 Click **OK** to close the dialog box.


Reviewing Checks Progressively

On the Results Manager perspective toolbar, use the forward arrow  to move to the next unjustified check. The software takes you through checks in the following order:

- All red checks
- All gray checks (the first check in each unreachable function).
- Orange checks — the number of orange checks is determined by the methodology and review level that you select

Earlier in this tutorial, you selected Methodology for C, criterion 1. In this part of the tutorial, you review the checks for `example.c` using this methodology and criterion. To navigate through these checks:

- 1 Select the **Results Summary** tab.

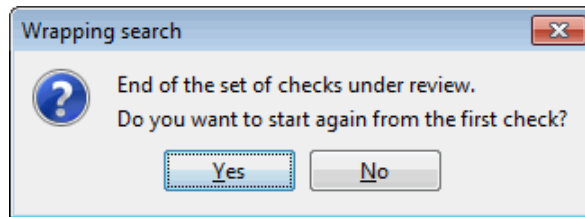

4 Click **No**.

Automatically Testing Unproven Code

Reviewing orange code to find true errors is a time-consuming task. You can use the Automatic Orange Tester to automatically create and run test cases to identify errors in the orange code. The workflow for using the Automatic Orange Tester is:

- 1** Set an option to indicate that you want the software to run the Automatic Orange Tester at the end of the verification.
- 2** Run the verification. The software uses results from the Automatic Orange Tester to identify potential run-time errors.
- 3** If you want perform further dynamic tests on the code, run the Automatic Orange Tester manually.
- 4** Review the results.

To learn how to use the Automatic Orange Tester, see “Automatically Testing Orange Code” in the *Polyspace Products for C/C++ User’s Guide*.

Generating Reports of Verification Results

In this section...
“Polyspace Report Generator Overview” on page 4-31
“Generating Report for <code>example.c</code> ” on page 4-32

Polyspace Report Generator Overview

The Polyspace Report Generator allows you to generate reports about your verification results, using predefined report templates.

The Polyspace Report Generator provides the following report templates:

- **Coding Rules Report** – Provides information about compliance with MISRA C Coding Rules, as well as Polyspace configuration settings for the verification.
- **Developer Report** – Provides information useful to developers, including summary results, detailed lists of red, orange, and gray checks, and Polyspace configuration settings for the verification. Detailed results are sorted by type of check (Proven Run-Time Violations, Proven Unreachable Code Branches, Unreachable Functions, and Unproven Run-Time Checks).
- **Developer Review Report** – Provides the same information as the Developer Report, but reviewed results are sorted by review classification (High, Medium, Low, Not a defect) and status, and untagged checks are sorted by file location.
- **Developer with Green Checks Report** – Provides the same content as the Developer Report, but also includes a detailed list of green checks.
- **Quality Report** – Provides information useful to quality engineers, including summary results, statistics about the code, graphs showing distributions of checks per file, and Polyspace configuration settings for the verification.
- **Software Quality Objectives Report** – Provides comprehensive information on software quality objectives (SQO), including code metrics, code analysis (coding-rules checker results), code verification (run-time checks), and the configuration settings for the verification. The code

metrics section provides is the same information displayed in the Polyspace Metrics web interface.

The Polyspace Report Generator allows you to generate verification reports in the following formats:

- HTML
- PDF
- RTF
- DOC (Microsoft Word)
- XML

Note Microsoft Word format is not available on UNIX platforms. If you select Word format on a UNIX platform, the software uses RTF format instead.


Generating Report for example.c

You can generate reports for any verification results using the Polyspace Report Generator.

To generate a verification report:

- 1** If your verification results are not already open, open them.
- 2** Select **Run > Run Report > Run Report**.

The Run Report dialog box opens.

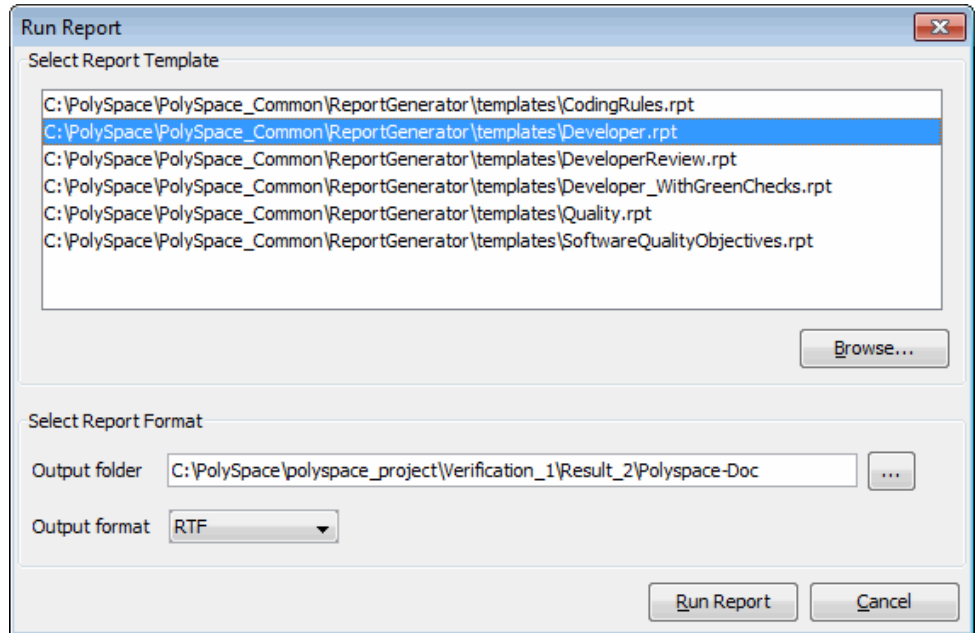

- 3** In the Select Report Template section, select **Developer.rpt**.
- 4** In the Output folder section, select the \polyspace_project folder.
- 5** Select PDF Output format.
- 6** Click **Run Report**.

The software creates the specified report. When report generation is complete, the report opens.

Checking Compliance with Coding Rules

- “About Checking Compliance with Coding Rules Tutorial” on page 5-2
- “Setting Up Coding Rules Checking” on page 5-4
- “Running a Verification with Coding Rules Checking” on page 5-15

About Checking Compliance with Coding Rules Tutorial

In this section...
“Overview” on page 5-2
“Before You Start” on page 5-3

Overview

Polyspace software allows you to analyze code to demonstrate compliance with established C or C++ coding standards (MISRA C 2004, MISRA C++:2008, or JSF++:2005).²

Applying coding rules can both reduce the number of orange checks in your verification results, and improve the quality of your code. Coding rules are the most efficient way to reduce orange checks.

To check compliance with coding rules, you set an option in your project and then run a verification. Polyspace software finds the violations during the compile phase of a verification. When you have addressed all coding rule violations, you run the verification again.

For more information on the coding rules checker, see “Checking Coding Rules” in the *Polyspace Products for C/C++ User’s Guide*

In this tutorial, you learn how to:

- 1 Create a second verification within your project.
- 2 Set an option for checking MISRA C compliance.
- 3 Select MISRA C rules to check.
- 4 Run a verification with MISRA C checking.
- 5 View coding rules violations using the Coding Rules perspective.

2. MISRA and MISRA C are registered trademarks of MISRA Ltd., held on behalf of the MISRA Consortium.

Before You Start

For this tutorial, you check the MISRA C compliance of the file `example.c`, using the project that you created in Chapter 2, “Setting Up a Polyspace Project”.

Setting Up Coding Rules Checking

In this section...

“Opening Your Example Project” on page 5-4

“Creating New Module” on page 5-5

“Setting MISRA C Checking Option” on page 5-8

“Creating a MISRA C Rules File” on page 5-9

“Excluding Files from the MISRA C Checking” on page 5-12

“Configuring Text and XML Editors” on page 5-13

“Saving the Project” on page 5-14

Opening Your Example Project

For this tutorial, you modify the project in `example.cfg` to include MISRA C checking. You use the Project Manager perspective to modify the project.

To open `example_project.cfg`:

1 Select **File > Open Project**.

The Open a Polyspace project file dialog box opens.

2 Navigate to `polyspace_project`.


3 Select `example_project.cfg`.

4 Click **Open** to open the file and close the dialog box.


Creating New Module

A Polyspace project can contain multiple modules. Each of these modules can verify a specific set of source files using a specific set of analysis options. In this section, you create a second module to check coding rules compliance for the `example.c` file.

To create a new module in `example_project`:


- 1 In the Project Browser, select **example_project [C]**.
- 2 Click the **Create a new module** icon  in the Project Browser toolbar.

A new verification, `Module_2`, appears in the Project Browser.

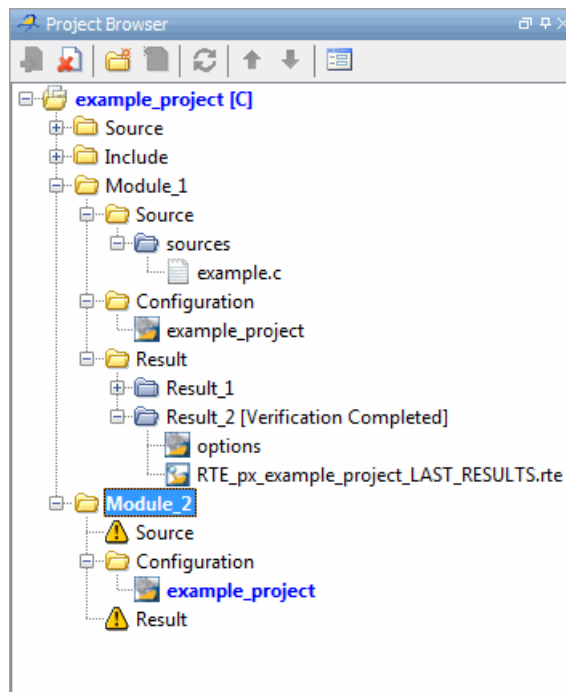


- 3 In the Project Browser Source tree, right-click `example.c`, and select **Copy Source File to > Module_2**.

The `example.c` file appears in the Source tree of `Module_2`.

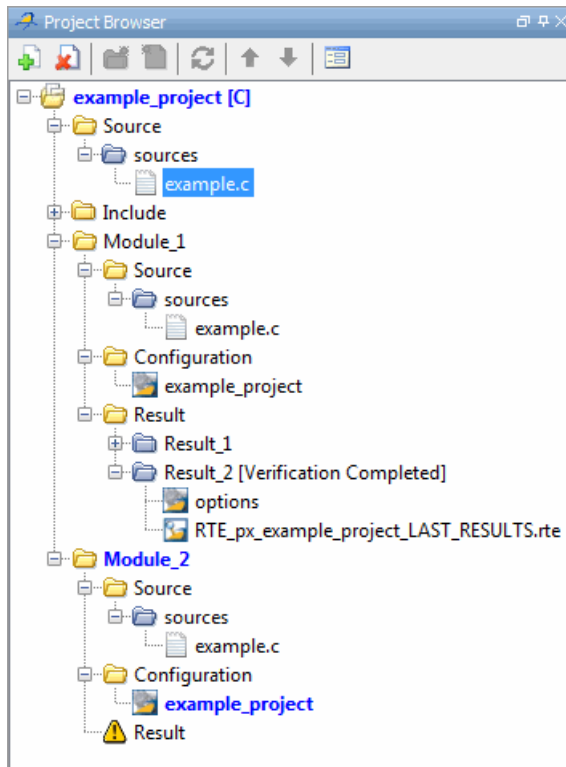

- 4** Right-click the Configuration folder in `Module_2`, and select **Create New Configuration**.
- 5** Right-click the `example_project_1` configuration, and select **Set as Active Configuration**.

The Project Browser now looks like the following figure.

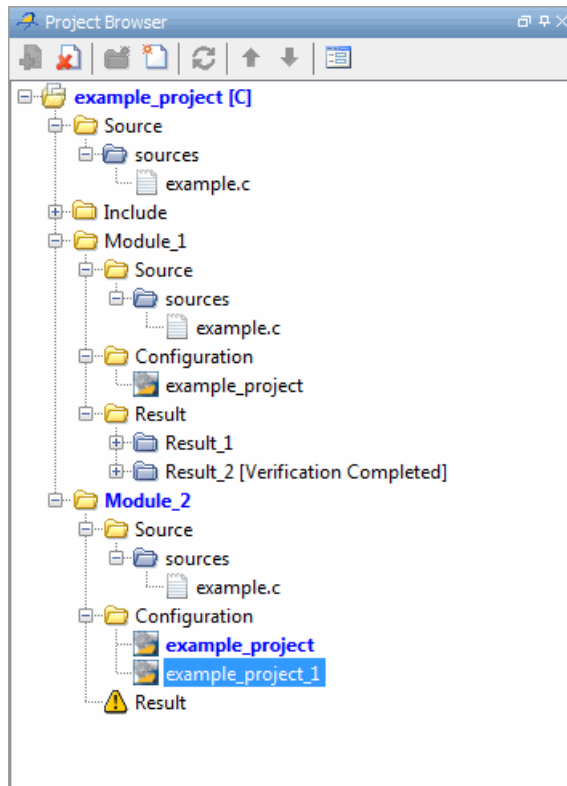

Setting MISRA C Checking Option

You set up MISRA C checking by setting an analysis option and then selecting the rules to check. To set the MISRA C checking option:

- 1 Select the `example_project_1` configuration in the Project Browser.
- 2 Select the **Configuration > All Settings** tab.
- 3 Expand the **Compliance with standards > Check MISRA C rules** node.
- 4 Select the **Check MISRA C rules** check box. The following options are now available:
 - **MISRA C rules configuration**
 - **Files and folders to ignore**
 - **Effective boolean types**
 - **Allowed pragmas**

These options allow you to specify:

- Which MISRA C rules to check
- Files, if any, to exclude from the checking
- Data types that you want Polyspace to consider as Boolean
- Undocumented pragma directives for which rule MISRA C 3.4 should not be applied.


Creating a MISRA C Rules File

You must have a rules file to run a verification with MISRA C checking. You can use an existing file or create a new one. You create a new rules file for this tutorial by:

- “Opening a New Rules File” on page 5-9
- “Setting All the Rules to Off” on page 5-10
- “Selecting the Rules to Check” on page 5-10

Opening a New Rules File

To open a new rules file:

- 1** In the Project Manager perspective, select the **Configuration > All Settings** tab.
- 2** Expand the **Compliance with standards > Check MISRA C rules** node.
- 3** Select the **Check MISRA C rules** check box.
- 4** From the **MISRA C rules configuration** drop-down list, select custom.
- 5** Click the button  to the right of the **MISRA C rules configuration** option.

A window for opening or creating a MISRA C rules file opens.

- 6** Select **File > New File**.

A table of rules appears. For each rule, specify one of the following states.

State	Causes the verification to...
Error	End after the compile phase when this rule is violated.
Warning	Display warning message and continue verification when this rule is violated.
Off	Skip checking of this rule.

Note The default state for most rules is `Warning`. The state for rules that have not yet been implemented is `Off`. Some rules always have a state of `Error` (you cannot change this state).

Setting All the Rules to Off

In this tutorial, you check only a few rules. Therefore, first set the state of all rules to `Off`. Later, you can select the specific rules that you want to check.

To set the state of all rules to `Off`:


- 1 From the **Set the following state to all MISRA rules** drop-down list, select `Off`.
- 2 Click **GO**.

Selecting the Rules to Check

To select the rules to check for this tutorial:

- 1 Expand the set of rules named `16 Functions`.
- 2 Select the **Error** column for `16.3`.
- 3 Expand the set of rules named `17 Pointers and arrays`.
- 4 Select the **Warning** column for `17.4`.

The completed rules table looks like the following figure:

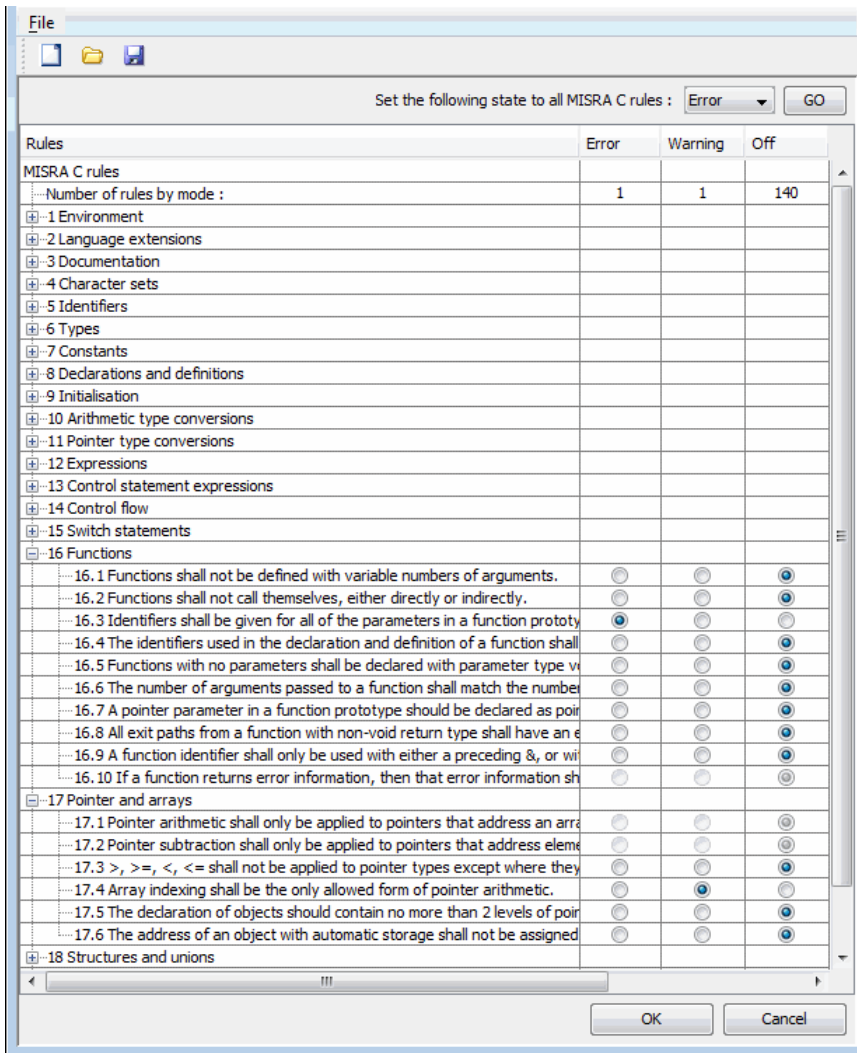

5 Click **OK** to save the rules and close the window.


The Save as dialog box opens.


6 In **File**, enter `misrac.txt`

7 Click **OK** to save the file and close the dialog box.


Excluding Files from the MISRA C Checking

You can exclude files from MISRA C checking. You might want to exclude some included files. To exclude `math.h` from the MISRA C checking of the project `example.cfg`:

- 1 Select the **Configuration > All Settings** tab.
- 2 Expand the **Compliance with standards > Check MISRA C rules** or **Compliance with standards > Coding rules checker** node.
- 3 Click the button  to the right of the **Files and folders to ignore** option. The Files and folders to ignore dialog box opens.

- 4 Click the folder icon .
- 5 Navigate to the folder `polyspace_project\includes`.
- 6 Select the file `math.h`.
- 7 Click **OK**.

The file `math.h` appears in the list of files to ignore.

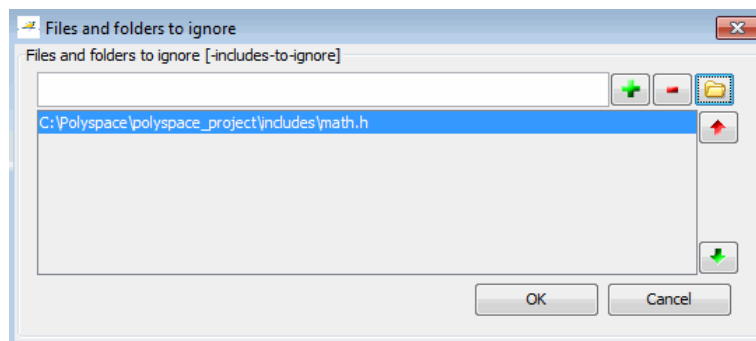

- 8 Click **OK** to close the dialog box.

Configuring Text and XML Editors


Before you check MISRA rules, configure your text and XML editors in the Polyspace Preferences dialog box. Configuring text and XML editors allows you to view source files and MISRA reports directly from the Results Manager perspective.

To configure your text and .XML editors:

- 1 From the Polyspace verification environment toolbar, select **Options > Preferences**.

The Polyspace Preferences dialog box opens.

- 2 Select the **Editors** tab.

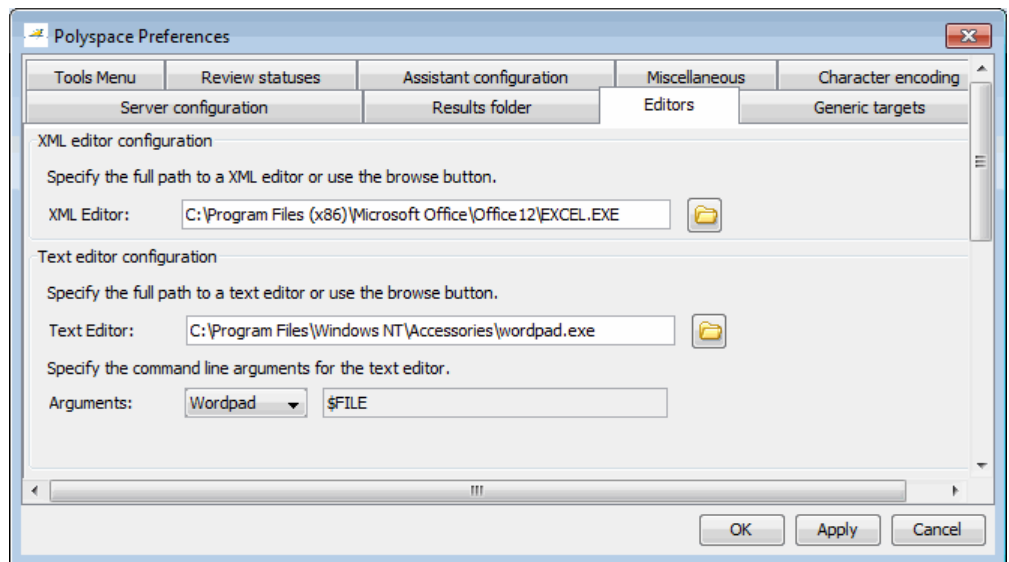

- 3 Specify an **XML editor** to use to view MISRA-C reports. For example:

C:\Program Files\MSOffice\Office12\EXCEL.EXE

- 4 Specify a **Text Editor** to use to view source files from the Project Manager logs. For example:

C:\Program Files\Windows NT\Accessories\wordpad.exe

5 From the **Arguments** drop-down list, select your text editor to automatically specify the command line arguments for that editor.

- Emacs
- Notepad++
- UltraEdit
- VisualStudio
- Wordpad

If you are using another text editor, select **Custom** from the drop-down menu, and specify the command line arguments for the text editor.

6 Click **OK**.

Saving the Project

Save your project to save your new verification and analysis settings.

Running a Verification with Coding Rules Checking

In this section...

“Starting the Verification” on page 5-15

“Examining MISRA C Violations” on page 5-16


“Opening MISRA-C Report” on page 5-19

Starting the Verification

When you run a verification with the MISRA C option selected, the software checks most of the MISRA C rules during the compile phase.³

If there is a violation of a rule with state **Error**, the verification stops.

To start the verification:

- 1 In the Project Browser, select your project configuration, for example, `example_project_1`.
- 2 On the Project Manager toolbar, click the **Run** button  .

The verification fails because of MISRA C violations. You see messages in the **Full Log**, and the **Output Summary** indicates that the verification has detected MISRA errors.


³. MISRA and MISRA C are registered trademarks of MISRA Ltd., held on behalf of the MISRA Consortium.

Examining MISRA C Violations


To examine the MISRA C violations:

- 1 In the Project Browser Result folder, double-click **MISRA-C-report.xml**.

The Results Manager perspective opens, displaying a list of MISRA C violations.

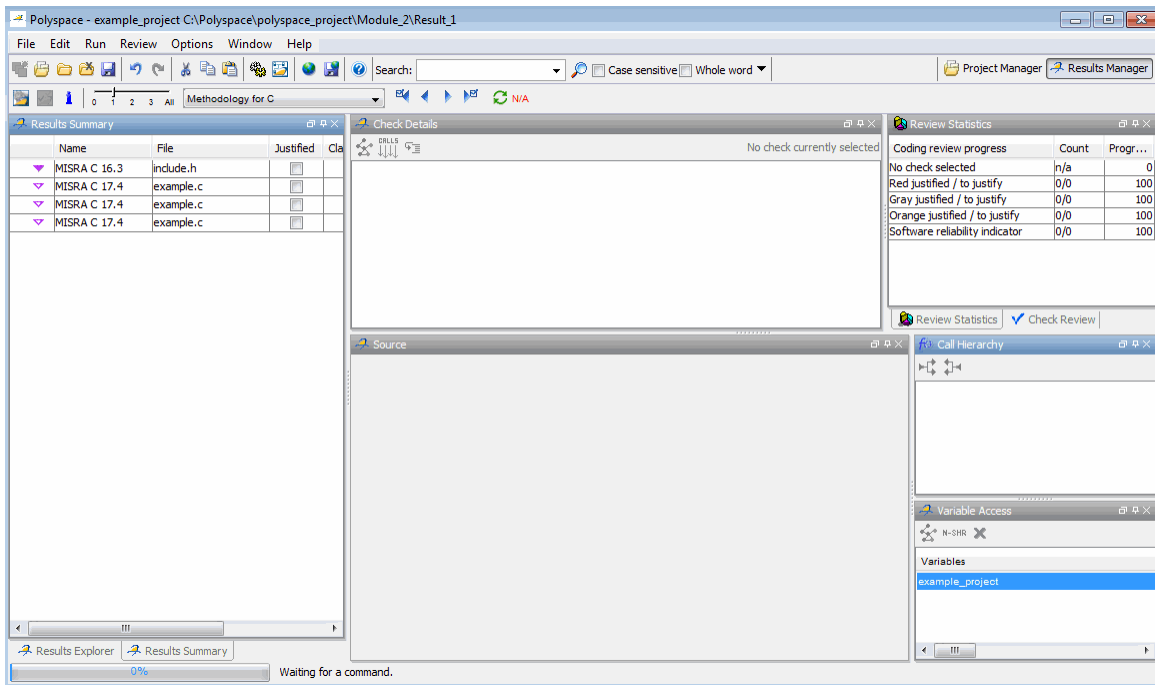

- 2 Click any violation to see a description of the violated rule, the full path of the file in which the violation was found, and the source code containing the violation.

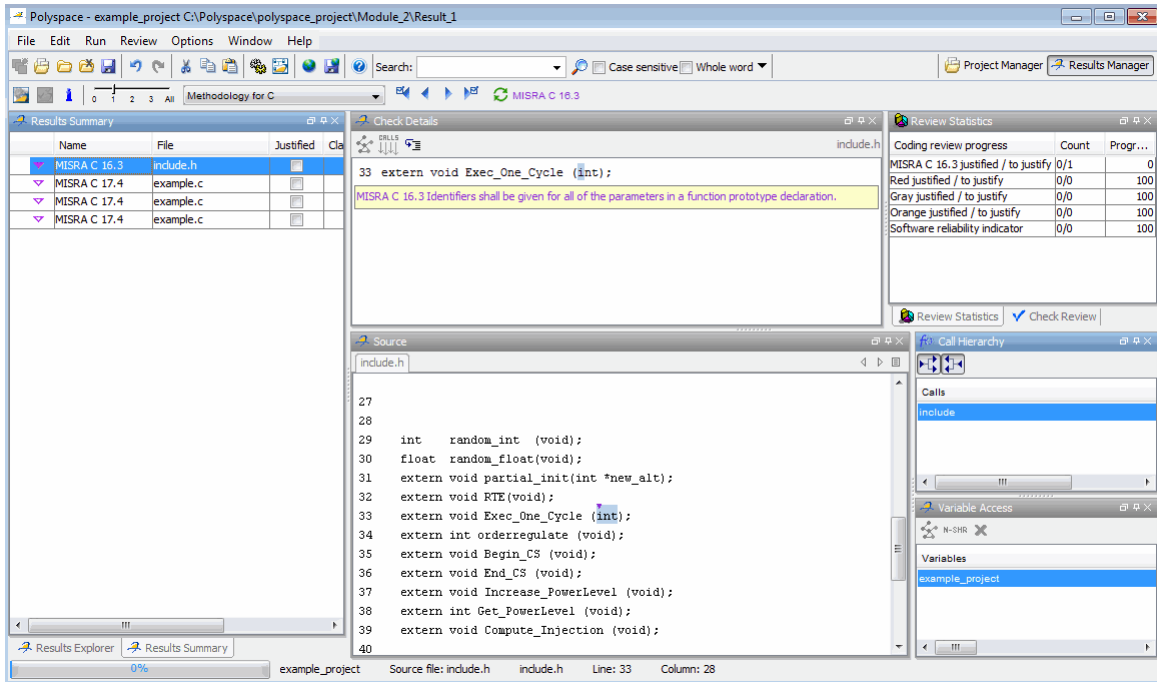


The log reports a violation of rule 16.3. A function prototype declaration in `include.h` is missing an identifier.

- In the **Source** pane, right-click the highlighted code containing the violation of rule 16.3. From the context menu, select **Open Source File**.

The `include.h` file opens in your text editor.

Note Before you can open source files, you must configure a text editor. See “Configuring Text and XML Editors” on page 5-13.

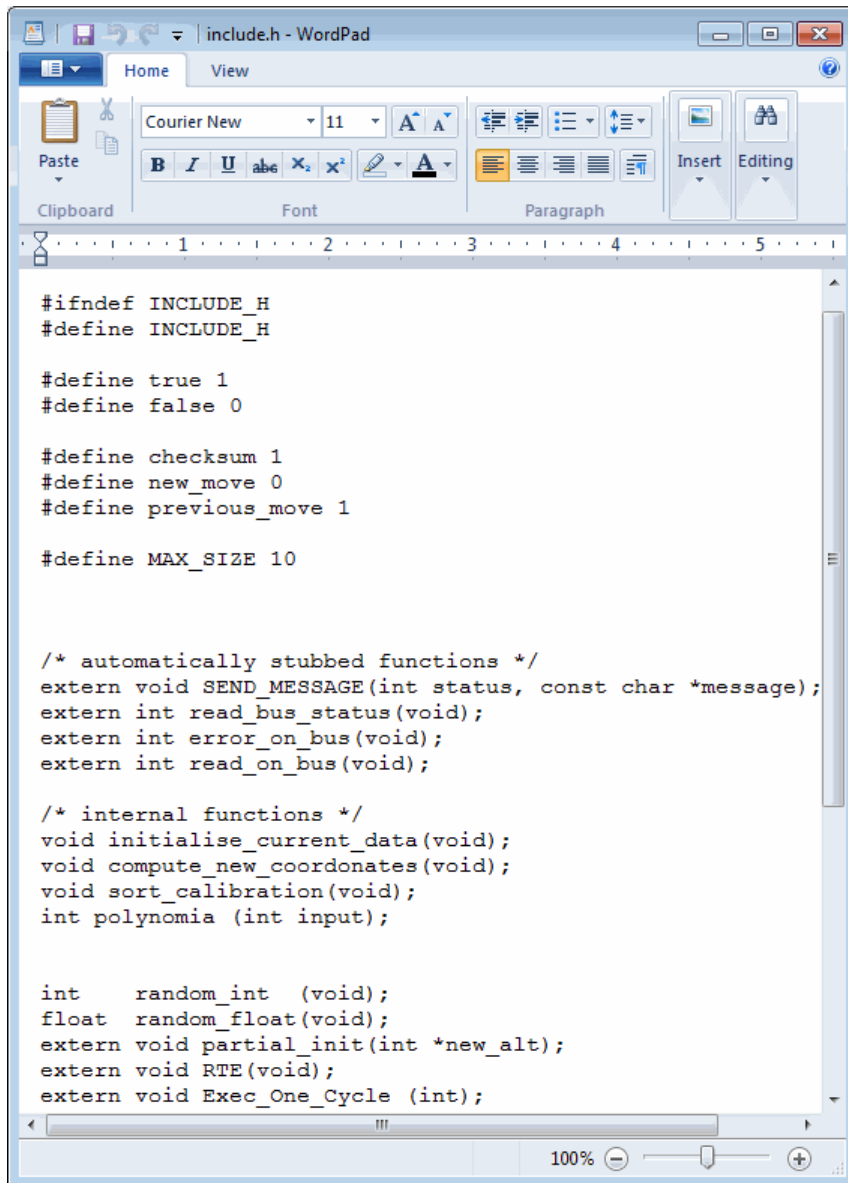

```
#ifndef INCLUDE_H
#define INCLUDE_H

#define true 1
#define false 0

#define checksum 1
#define new_move 0
#define previous_move 1

#define MAX_SIZE 10

/* automatically stubbed functions */
extern void SEND_MESSAGE(int status, const char *message);
extern int read_bus_status(void);
extern int error_on_bus(void);
extern int read_on_bus(void);

/* internal functions */
void initialise_current_data(void);
void compute_new_coordonates(void);
void sort_calibration(void);
int polynomia (int input);

int random_int (void);
float random_float(void);
extern void partial_init(int *new_alt);
extern void RTE(void);
extern void Exec_One_Cycle (int);
```

4 Correct the MISRA violation and run the verification again.

The verification then is completed, and the results will be the same as those from the tutorial in Chapter 3, “Running a Verification”.

Opening MISRA-C Report

After you check MISRA rules, you can generate a report containing all the errors and warnings reported by the MISRA-C checker.

Note Before you can open a MISRA-C report, you must configure an editor. See “Configuring Text and XML Editors” on page 5-13.

To view the MISRA-C report:

- 1 Navigate to the folder that contains your coding rules report, for example, `C:\Polyspace\polyspace_project\Module_2\Result_1\Polyspace-Doc`
- 2 Double-click the coding rules report, for example, `example_project_CodingRules.rtf`. The report opens in your selected editor.

A

- active project
 - definition 3-22
 - setting 3-22
- analysis options 2-14
 - MISRA C compliance 5-8
- ANSI compliance 3-10
- AOT. *See* Automatic Orange Tester
- Automatic Orange Tester
 - overview 4-30

C

- call graph 4-12
- call tree view 4-4
- calling sequence 4-12
- cfg. *See* configuration file
- client 1-7 3-2
 - installation 1-12
 - verification on 3-27
- coding review progress view 4-4 4-12
- coding rules compliance 1-4
- color-coding of verification results 1-4 to 1-5 4-5
- compile log
 - Project Manager 3-12 3-29
 - Spooler 3-13
- compile phase 3-10
- compliance
 - ANSI 3-10
 - coding rules 1-4
 - MISRA C 5-1
- configuration file
 - definition 2-3

D

- default folder
 - changing location 2-7
- division by zero
 - example 4-18

- downloading
 - results 3-18

E

- expert mode
 - filters 4-20

F

- files
 - includes 2-11
 - source 2-11
- filters 4-20
- folders
 - includes 2-11
 - sources 2-11

H

- hardware requirements 3-19
- help
 - accessing 1-16

I

- installation
 - Polyspace Client for C/C++ 1-12
 - Polyspace products 1-12
 - Polyspace Server for C/C++ 1-12

L

- licenses
 - obtaining 1-12
- logs
 - compile
 - Project Manager 3-12 3-29
 - Spooler 3-13
 - full
 - Project Manager 3-12 3-29

- Spooler 3-13
 - stats
 - Project Manager 3-12 3-29
 - Spooler 3-13
 - viewing
 - Project Manager 3-12 3-29
 - Spooler 3-13
- M**
- manual mode
 - selection 4-9
 - use 4-8
 - MISRA C compliance
 - analysis option 5-8
 - checking 5-1
 - file exclusion 5-12
 - rules file 5-9
 - violations 5-16
- P**
- Polyspace Client for C/C++
 - installation 1-12
 - license 1-12
 - Polyspace In One Click
 - active project 3-22
 - overview 3-22
 - sending files to Polyspace software 3-24
 - starting verification 3-24
 - use 3-22
 - Polyspace products for C
 - installation 1-12
 - licenses 1-12
 - related products 1-17
 - workflow 1-13
 - Polyspace products for C/C++
 - components 1-7
 - overview 1-4
 - user interface 1-7
 - Polyspace Queue Manager Interface. *See* Spooler
 - Polyspace Server for C/C++
 - installation 1-12
 - license 1-12
 - Polyspace verification environment
 - opening 2-5
 - preferences
 - Project Manager
 - default server mode 3-10
 - server detection 3-20
 - procedural entities view 4-4
 - product overview 1-4
 - progress bar
 - Project Manager window 3-12 3-29
 - project
 - creation 2-3 2-7
 - definition 2-3
 - file types
 - configuration file 2-3
 - folders
 - includes 2-4
 - results 2-4
 - sources 2-4
 - opening 3-4
 - saving 2-14
 - Project Manager
 - monitoring verification progress 3-12 3-29
 - opening 2-5
 - overview 2-5
 - perspective 2-5
 - starting verification on client 3-27
 - starting verification on server 3-10
 - viewing logs 3-12 3-29
 - window
 - progress bar 3-12 3-29
 - Project Manager perspective 1-7
- R**
- related products 1-17

- Polyspace products for linking to Models 1-17
- Polyspace products for verifying Ada code 1-17
- reports
 - generation 4-31
- results
 - downloading from server 3-18
 - opening 4-3
 - report generation 4-31
 - reviewing 4-1
- Results Manager perspective 1-7
 - call tree view 4-4
 - coding review progress view 4-4
 - opening 4-3
 - overview 4-4
 - procedural entities view 4-4
 - selected check view 4-4
 - source code view 4-4
 - variables view 4-4
- rte view. *See* procedural entities view

S

- selected check view 4-4
- server 1-7 3-2
 - detection 3-20
 - information in preferences 3-20
 - installation 1-12 3-20
 - verification on 3-10
- source code view 4-4
- Spooler 1-7
 - monitoring verification progress 3-13
 - removing verification from queue 3-18
 - use 3-13
 - viewing log 3-13

T

- target environment 2-13
- troubleshooting failed verification 3-19

U

- unreachable code
 - example 4-16

V

- variables view 4-4
- verification
 - Ada code 1-17
 - C/C++ code 1-4
 - client 3-2
 - compile phase 3-10
 - failed 3-19
 - monitoring progress
 - Project Manager 3-12 3-29
 - Spooler 3-13
 - phases 3-10
 - results
 - color-coding 1-4 to 1-5
 - opening 4-3
 - report generation 4-31
 - reviewing 4-1
 - running 3-2
 - running on client 3-27
 - running on server 3-10
 - starting
 - from Polyspace In One Click 3-2 3-24
 - from Project Manager 3-2 3-10 3-27
 - stopping 3-31
 - troubleshooting 3-19
 - with MISRA C checking 5-15
- Verification
 - stopping 3-30

W

- workflow
 - basic 1-13
 - in this guide 1-14