


Neural Network Toolbox™

Reference

R2013a

*Mark Hudson Beale
Martin T. Hagan
Howard B. Demuth*

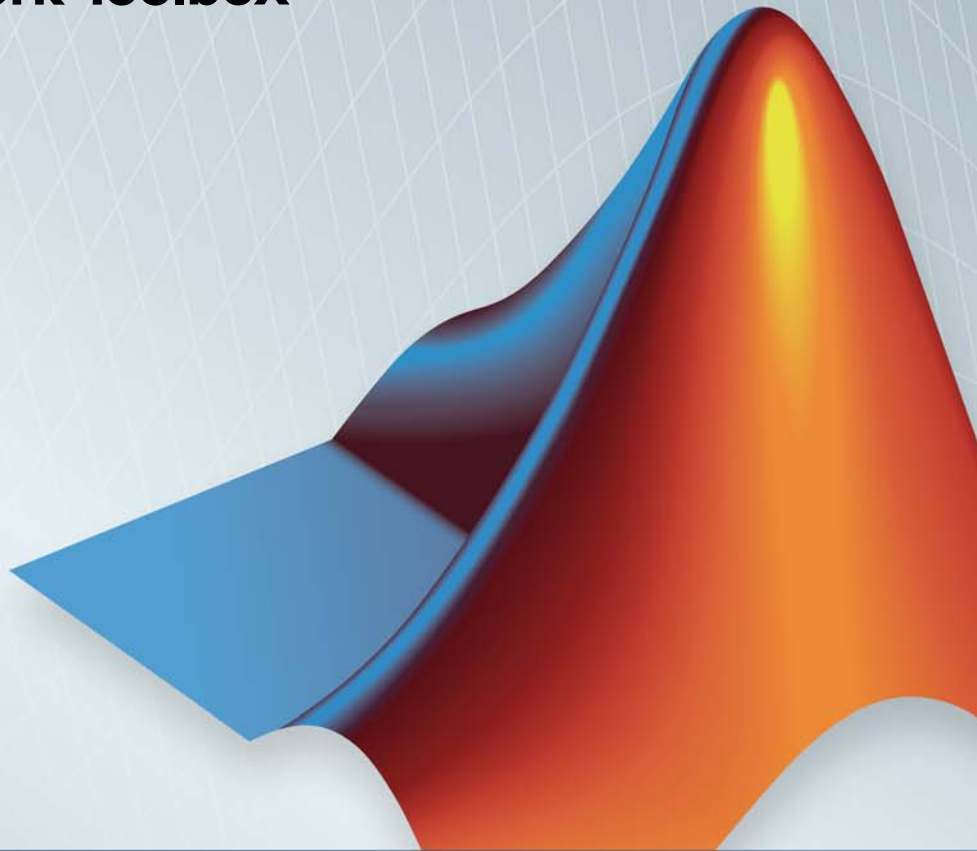

MATLAB®

How to Contact MathWorks



www.mathworks.com Web
comp.soft-sys.matlab Newsgroup
www.mathworks.com/contact_TS.html Technical Support



suggest@mathworks.com Product enhancement suggestions
bugs@mathworks.com Bug reports
doc@mathworks.com Documentation error reports
service@mathworks.com Order status, license renewals, passcodes
info@mathworks.com Sales, pricing, and general information



508-647-7000 (Phone)



508-647-7001 (Fax)



The MathWorks, Inc.
3 Apple Hill Drive
Natick, MA 01760-2098

For contact information about worldwide offices, see the MathWorks Web site.

Neural Network Toolbox™ Reference

© COPYRIGHT 1992–2013 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

June 1992	First printing	
April 1993	Second printing	
January 1997	Third printing	
July 1997	Fourth printing	
January 1998	Fifth printing	Revised for Version 3 (Release 11)
September 2000	Sixth printing	Revised for Version 4 (Release 12)
June 2001	Seventh printing	Minor revisions (Release 12.1)
July 2002	Online only	Minor revisions (Release 13)
January 2003	Online only	Minor revisions (Release 13SP1)
June 2004	Online only	Revised for Version 4.0.3 (Release 14)
October 2004	Online only	Revised for Version 4.0.4 (Release 14SP1)
October 2004	Eighth printing	Revised for Version 4.0.4
March 2005	Online only	Revised for Version 4.0.5 (Release 14SP2)
March 2006	Online only	Revised for Version 5.0 (Release 2006a)
September 2006	Ninth printing	Minor revisions (Release 2006b)
March 2007	Online only	Minor revisions (Release 2007a)
September 2007	Online only	Revised for Version 5.1 (Release 2007b)
March 2008	Online only	Revised for Version 6.0 (Release 2008a)
October 2008	Online only	Revised for Version 6.0.1 (Release 2008b)
March 2009	Online only	Revised for Version 6.0.2 (Release 2009a)
September 2009	Online only	Revised for Version 6.0.3 (Release 2009b)
March 2010	Online only	Revised for Version 6.0.4 (Release 2010a)
September 2010	Online only	Revised for Version 7.0 (Release 2010b)
April 2011	Online only	Revised for Version 7.0.1 (Release 2011a)
September 2011	Online only	Revised for Version 7.0.2 (Release 2011b)
March 2012	Online only	Revised for Version 7.0.3 (Release 2012a)
September 2012	Online only	Revised for Version 8.0 (Release 2012b)
March 2013	Online only	Revised for Version 8.0.1 (Release 2013a)

Functions — Alphabetical List

1

Index

Functions — Alphabetical List

adapt

Purpose Adapt neural network to data as it is simulated

Syntax `[net,Y,E,Pf,Af,tr] = adapt(net,P,T,Pi,Ai)`

To Get Help Type `help network/adapt`.

Description This function calculates network outputs and errors after each presentation of an input.

`[net,Y,E,Pf,Af,tr] = adapt(net,P,T,Pi,Ai)` takes

<code>net</code>	Network
<code>P</code>	Network inputs
<code>T</code>	Network targets (default = zeros)
<code>Pi</code>	Initial input delay conditions (default = zeros)
<code>Ai</code>	Initial layer delay conditions (default = zeros)

and returns the following after applying the `adapt` function `net.adaptFcn` with the adaption parameters `net.adaptParam`:

<code>net</code>	Updated network
<code>Y</code>	Network outputs
<code>E</code>	Network errors
<code>Pf</code>	Final input delay conditions
<code>Af</code>	Final layer delay conditions
<code>tr</code>	Training record (epoch and perf)

Note that `T` is optional and is only needed for networks that require targets. `Pi` and `Pf` are also optional and only need to be used for networks that have input or layer delays.

adapt's signal arguments can have two formats: cell array or matrix. The cell array format is easiest to describe. It is most convenient for networks with multiple inputs and outputs, and allows sequences of inputs to be presented,

P	Ni-by-TS cell array	Each element $P\{i, ts\}$ is an Ri-by-Q matrix.
T	Nt-by-TS cell array	Each element $T\{i, ts\}$ is a Vi-by-Q matrix.
Pi	Ni-by-ID cell array	Each element $Pi\{i, k\}$ is an Ri-by-Q matrix.
Ai	Nl-by-LD cell array	Each element $Ai\{i, k\}$ is an Si-by-Q matrix.
Y	No-by-TS cell array	Each element $Y\{i, ts\}$ is a Ui-by-Q matrix.
E	No-by-TS cell array	Each element $E\{i, ts\}$ is a Ui-by-Q matrix.
Pf	Ni-by-ID cell array	Each element $Pf\{i, k\}$ is an Ri-by-Q matrix.
Af	Nl-by-LD cell array	Each element $Af\{i, k\}$ is an Si-by-Q matrix.

where

Ni	=	net.numInputs
Nl	=	net.numLayers
No	=	net.numOutputs
ID	=	net.numInputDelays
LD	=	net.numLayerDelays
TS	=	Number of time steps

Q = Batch size
Ri = net.inputs{i}.size
Si = net.layers{i}.size
Ui = net.outputs{i}.size

The columns of Pi, Pf, Ai, and Af are ordered from oldest delay condition to most recent:

Pi{i,k} = Input i at time ts = k - ID
Pf{i,k} = Input i at time ts = TS + k - ID
Ai{i,k} = Layer output i at time ts = k - LD
Af{i,k} = Layer output i at time ts = TS + k - LD

The matrix format can be used if only one time step is to be simulated (TS = 1). It is convenient for networks with only one input and output, but can be used with networks that have more.

Each matrix argument is found by storing the elements of the corresponding cell array argument in a single matrix:

P (sum of Ri)-by-Q matrix
T (sum of Vi)-by-Q matrix
Pi (sum of Ri)-by-(ID*Q) matrix
Ai (sum of Si)-by-(LD*Q) matrix
Y (sum of Ui)-by-Q matrix
E (sum of Ui)-by-Q matrix
Pf (sum of Ri)-by-(ID*Q) matrix
Af (sum of Si)-by-(LD*Q) matrix

Examples

Here two sequences of 12 steps (where T1 is known to depend on P1) are used to define the operation of a filter.

```
p1 = {-1 0 1 0 1 1 -1 0 -1 1 0 1};
t1 = {-1 -1 1 1 1 2 0 -1 -1 0 1 1};
```

Here `linearlayer` is used to create a layer with an input range of [-1 1], one neuron, input delays of 0 and 1, and a learning rate of 0.5. The linear layer is then simulated.

```
net = linearlayer([0 1],0.5);
```

Here the network adapts for one pass through the sequence.

The network's mean squared error is displayed. (Because this is the first call to `adapt`, the default `Pi` is used.)

```
[net,y,e,pf] = adapt(net,p1,t1);
mse(e)
```

Note that the errors are quite large. Here the network adapts to another 12 time steps (using the previous `Pf` as the new initial delay conditions).

```
p2 = {1 -1 -1 1 1 -1 0 0 0 1 -1 -1};
t2 = {2 0 -2 0 2 0 -1 0 0 1 0 -1};
[net,y,e,pf] = adapt(net,p2,t2,pf);
mse(e)
```

Here the network adapts for 100 passes through the entire sequence.

```
p3 = [p1 p2];
t3 = [t1 t2];
net.adaptParam.passes = 100;
[net,y,e] = adapt(net,p3,t3);
mse(e)
```

adapt

The error after 100 passes through the sequence is very small. The network has adapted to the relationship between the input and target signals.

Algorithms

`adapt` calls the function indicated by `net.adaptFcn`, using the adaption parameter values indicated by `net.adaptParam`.

Given an input sequence with `TS` steps, the network is updated as follows: Each step in the sequence of inputs is presented to the network one at a time. The network's weight and bias values are updated after each step, before the next step in the sequence is presented. Thus the network is updated `TS` times.

See Also

`sim` | `init` | `train` | `revert`

Purpose Adapt network with weight and bias learning rules

Syntax `[net,ar,Ac] = adapt(net,Pd,T,Ai)`

Description This function is normally not called directly, but instead called indirectly through the function `adapt` after setting a network's adaption function (`net.adaptFcn`) to this function.

`[net,ar,Ac] = adapt(net,Pd,T,Ai)` takes these arguments,

<code>net</code>	Neural network
<code>Pd</code>	Delayed processed input states and inputs
<code>T</code>	Targets
<code>Ai</code>	Initial layer delay states

and returns

<code>net</code>	Neural network after adaption
<code>ar</code>	Adaption record
<code>Ac</code>	Combined initial layer states and layer outputs

Examples Linear layers use this adaption function. Here a linear layer with input delays of 0 and 1, and a learning rate of 0.5, is created and adapted to produce some target data `t` when given some input data `x`. The response is then plotted, showing the network's error going down over time.

```
x = {-1 0 1 0 1 1 -1 0 -1 1 0 1};
t = {-1 -1 1 1 1 2 0 -1 -1 0 1 1};
net = linearlayer([0 1],0.5);
net.adaptFcn
[net,y,e,xf] = adapt(net,x,t);
plotresponse(t,y)
```

adaptwb

See Also

[adapt](#)

Purpose Add delay to neural network response

Syntax `net = adddelay(net,n)`

Description `net = adddelay(net,n)` takes these arguments,

<code>net</code>	Neural network
<code>n</code>	Number of delays

and returns the network with input delay connections increased, and output feedback delays decreased, by the specified number of delays `n`. The result is a network which behaves identically, except that outputs are produced `n` timesteps later.

If the number of delays `n` is not specified, a default of one delay is used.

Examples

Here a time delay network is created, trained and simulated in its original form on an input time series `X` and target series `T`. It is then simulated with a delay removed and then added back. These first and third outputs will be identical, while the second will be shifted by one timestep.

```
[X,T] = simpleseries_dataset;
net = timedelaynet(1:2,20);
[Xs,Xi,Ai,Ts] = preparets(net,X,T);
net = train(net,Xs,Ts,Xi);
y1 = net(Xs)
net2 = removedelay(net);
[Xs,Xi,Ai,Ts] = preparets(net2,X,T);
y2 = net2(Xs,Xi)
net3 = adddelay(net2)
[Xs,Xi,Ai,Ts] = preparets(net3,X,T);
y3 = net3(Xs,Xi)
```

See Also `closeloop` | `openloop` | `removedelay`

boxdist

Purpose	Distance between two position vectors
Syntax	<code>d = boxdist(pos)</code>
Description	<p><code>boxdist</code> is a layer distance function that is used to find the distances between the layer's neurons, given their positions.</p> <p><code>d = boxdist(pos)</code> takes one argument,</p> <p><code>pos</code> N-by-S matrix of neuron positions</p> <p>and returns the S-by-S matrix of distances.</p> <p><code>boxdist</code> is most commonly used with layers whose topology function is <code>gridtop</code>.</p>
Examples	<p>Here you define a random matrix of positions for 10 neurons arranged in three-dimensional space and then find their distances.</p> <pre>pos = rand(3,10); d = boxdist(pos)</pre>
Network Use	<p>To change a network so that a layer's topology uses <code>boxdist</code>, set <code>net.layers{i}.distanceFcn</code> to <code>'boxdist'</code>.</p> <p>In either case, call <code>sim</code> to simulate the network with <code>boxdist</code>.</p>
Algorithms	<p>The box distance D between two position vectors P_i and P_j from a set of S vectors is</p> $D_{ij} = \max(\text{abs}(P_i - P_j))$
See Also	<code>dist</code> <code>linkdist</code> <code>mandist</code> <code>sim</code>

Purpose

Backpropagation through time derivative function

Syntax

```
bttderiv('dperf_dwb',net,X,T,Xi,Ai,EW)
bttderiv('de_dwb',net,X,T,Xi,Ai,EW)
```

Description

This function calculates derivatives using the chain rule from a network's performance back through the network, and in the case of dynamic networks, back through time.

`bttderiv('dperf_dwb',net,X,T,Xi,Ai,EW)` takes these arguments,

<code>net</code>	Neural network
<code>X</code>	Inputs, an $R \times Q$ matrix (or $N \times TS$ cell array of $R \times Q$ matrices)
<code>T</code>	Targets, an $S \times Q$ matrix (or $M \times TS$ cell array of $S \times Q$ matrices)
<code>Xi</code>	Initial input delay states (optional)
<code>Ai</code>	Initial layer delay states (optional)
<code>EW</code>	Error weights (optional)

and returns the gradient of performance with respect to the network's weights and biases, where R and S are the number of input and output elements and Q is the number of samples (and N and M are the number of input and output signals, R_i and S_i are the number of each input and outputs elements, and TS is the number of timesteps).

`bttderiv('de_dwb',net,X,T,Xi,Ai,EW)` returns the Jacobian of errors with respect to the network's weights and biases.

Examples

Here a feedforward network is trained and both the gradient and Jacobian are calculated.

```
[x,t] = simplefit_dataset;
net = feedforwardnet(20);
```

bttderiv

```
net = train(net,x,t);  
y = net(x);  
perf = perform(net,t,y);  
gwb = bttderiv('dperf_dwb',net,x,t)  
jwb = bttderiv('de_dwb',net,x,t)
```

See Also

[defaultderiv](#) | [fpderiv](#) | [num2deriv](#) | [num5deriv](#) | [staticderiv](#)

Purpose Cascade-forward neural network

Syntax `cascadeforwardnet(hiddenSizes,trainFcn)`

Description Cascade-forward networks are similar to feed-forward networks, but include a connection from the input and every previous layer to following layers.

As with feed-forward networks, a two-or more layer cascade-network can learn any finite input-output relationship arbitrarily well given enough hidden neurons.

`cascadeforwardnet(hiddenSizes,trainFcn)` takes these arguments,

`hiddenSizes` Row vector of one or more hidden layer sizes (default = 10)

`trainFcn` Training function (default = 'trainlm')

and returns a new cascade-forward neural network.

Examples Here a cascade network is created and trained on a simple fitting problem.

```
[x,t] = simplefit_dataset;  
net = cascadeforwardnet(10);  
net = train(net,x,t);  
view(net)  
y = net(x)  
perf = perform(net,y,t)
```

See Also `feedforwardnet`

catelements

Purpose Concatenate neural network data elements

Syntax `catelements(x1,x2,...,xn)`
`[x1; x2; ... xn]`

Description `catelements(x1,x2,...,xn)` takes any number of neural network data values, and merges them along the element dimension (i.e., the matrix row dimension).

If all arguments are matrices, this operation is the same as `[x1; x2; ... xn]`.

If any argument is a cell array, then all non-cell array arguments are enclosed in cell arrays, and then the matrices in the same positions in each argument are concatenated.

Examples This code concatenates the elements of two matrix data values.

```
x1 = [1 2 3; 4 7 4]
x2 = [5 8 2; 4 7 6; 2 9 1]
y = catelements(x1,x2)
```

This code concatenates the elements of two cell array data values.

```
x1 = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
x2 = {[2 1 3] [4 5 6]; [2 5 4] [9 7 5]}
y = catelements(x1,x2)
```

See Also `nndata` | `numelements` | `getelements` | `setelements` | `catsignals` | `catsamples` | `cattimesteps`

Purpose

Concatenate neural network data samples

Syntax

```
catsamples(x1,x2,...,xn)
[x1 x2 ... xn]
catsamples(x1,x2,...,xn,'pad',v)
```

Description

`catsamples(x1,x2,...,xn)` takes any number of neural network data values, and merges them along the samples dimension (i.e., the matrix column dimension).

If all arguments are matrices, this operation is the same as `[x1 x2 ... xn]`.

If any argument is a cell array, then all non-cell array arguments are enclosed in cell arrays, and then the matrices in the same positions in each argument are concatenated.

`catsamples(x1,x2,...,xn,'pad',v)` allows samples with varying numbers of timesteps (columns of cell arrays) to be concatenated by padding the shorter time series with the value `v`, until they are the same length as the longest series. If `v` is not specified, then the value `NaN` is used, which is often used to represent unknown or don't-care inputs or targets.

Examples

This code concatenates the samples of two matrix data values.

```
x1 = [1 2 3; 4 7 4]
x2 = [5 8 2; 4 7 6]
y = catsamples(x1,x2)
```

This code concatenates the samples of two cell array data values.

```
x1 = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
x2 = {[2 1 3; 5 4 1] [4 5 6; 9 4 8]; [2 5 4] [9 7 5]}
y = catsamples(x1,x2)
```

Here the samples of two cell array data values, with unequal numbers of timesteps, are concatenated.

catsamples

```
x1 = {1 2 3 4 5};  
x2 = {10 11 12};  
y = catsamples(x1,x2,'pad')
```

See Also

[nndata](#) | [numsamples](#) | [getsamples](#) | [setsamples](#) | [catelements](#) | [catsignals](#) | [cattimesteps](#)

Purpose	Concatenate neural network data signals
Syntax	<code>catsignals(x1,x2,...,xn)</code> <code>{x1; x2; ...; xn}</code>
Description	<p><code>catsignals(x1,x2,...,xn)</code> takes any number of neural network data values, and merges them along the element dimension (i.e., the cell row dimension).</p> <p>If all arguments are matrices, this operation is the same as <code>{x1; x2; ...; xn}</code>.</p> <p>If any argument is a cell array, then all non-cell array arguments are enclosed in cell arrays, and the cell arrays are concatenated as <code>[x1; x2; ...; xn]</code>.</p>
Examples	<p>This code concatenates the signals of two matrix data values.</p> <pre>x1 = [1 2 3; 4 7 4] x2 = [5 8 2; 4 7 6] y = catsignals(x1,x2)</pre> <p>This code concatenates the signals of two cell array data values.</p> <pre>x1 = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]} x2 = {[2 1 3; 5 4 1] [4 5 6; 9 4 8]; [2 5 4] [9 7 5]} y = catsignals(x1,x2)</pre>
See Also	<code>nndata</code> <code>numsignals</code> <code>getsignals</code> <code>setsignals</code> <code>catelements</code> <code>catsamples</code> <code>cattimesteps</code>

cattimesteps

Purpose Concatenate neural network data timesteps

Syntax `cattimesteps(x1,x2,...,xn)`
`{x1 x2 ... xn}`

Description `cattimesteps(x1,x2,...,xn)` takes any number of neural network data values, and merges them along the element dimension (i.e., the cell column dimension).

If all arguments are matrices, this operation is the same as `{x1 x2 ... xn}`.

If any argument is a cell array, all non-cell array arguments are enclosed in cell arrays, and the cell arrays are concatenated as `[x1 x2 ... xn]`.

Examples This code concatenates the elements of two matrix data values.

```
x1 = [1 2 3; 4 7 4]
x2 = [5 8 2; 4 7 6]
y = cattimesteps(x1,x2)
```

This code concatenates the elements of two cell array data values.

```
x1 = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
x2 = {[2 1 3; 5 4 1] [4 5 6; 9 4 8]; [2 5 4] [9 7 5]}
y = cattimesteps(x1,x2)
```

See Also `nndata` | `numtimesteps` | `gettimesteps` | `setttimesteps` | `catelements` | `catsignals` | `catsamples`

Purpose Create cell array of matrices

Syntax `cellmat(A,B,C,D,v)`

Description `cellmat(A,B,C,D,v)` takes four integer values and one scalar value `v`, and returns an A-by-B cell array of C-by-D matrices of value `v`. If the value `v` is not specified, zero is used.

Examples Here two cell arrays of matrices are created.

```
cm1 = cellmat(2,3,5,4)
cm2 = cellmat(3,4,2,2,pi)
```

See Also `nndata`

closeloop

Purpose Convert neural network open-loop feedback to closed loop

Syntax `net = closeloop(net)`

Description `net = closeloop(net)` takes a neural network and closes any open-loop feedback. For each feedback output `i` whose property `net.outputs{i}.feedbackMode` is 'open', it replaces its associated feedback input and their input weights with layer weight connections coming from the output. The `net.outputs{i}.feedbackMode` property is set to 'closed', and the `net.outputs{i}.feedbackInput` property is set to an empty matrix. Finally, the value of `net.outputs{i}.feedbackDelays` is added to the delays of the feedback layer weights (i.e., to the delays values of the replaced input weights).

Examples Here a NARX network is designed in open-loop form and then converted to closed-loop form.

```
[X,T] = simplenarx_dataset;
net = narxnet(1:2,1:2,10);
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);
net = train(net,Xs,Ts,Xi,Ai);
view(net)
Yopen = net(Xs,Xi,Ai)
net = closeloop(net)
view(net)
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);
Yclosed = net(Xs,Xi,Ai);
```

See Also `noLoop` | `openloop`

Purpose Create all combinations of vectors

Syntax `combvec(A1,A2...)`

Description `combvec(A1,A2...)` takes any number of inputs,

A1 Matrix of N1 (column) vectors

A2 Matrix of N2 (column) vectors

and returns a matrix of $(N1*N2*...)$ column vectors, where the columns consist of all possibilities of A2 vectors, appended to A1 vectors, etc.


Examples

```
a1 = [1 2 3; 4 5 6];  
a2 = [7 8; 9 10];  
a3 = combvec(a1,a2)
```

Purpose

Competitive transfer function

Graph and Symbol



$$a = \text{compet}(n)$$

Compet Transfer Function

Syntax

```
A = compet(N,FP)
info = compet('code')
```

Description

`compet` is a neural transfer function. Transfer functions calculate a layer's output from its net input.

`A = compet(N,FP)` takes `N` and optional function parameters,

<code>N</code>	S-by-Q matrix of net input (column) vectors
<code>FP</code>	Struct of function parameters (ignored)

and returns the S-by-Q matrix `A` with a 1 in each column where the same column of `N` has its maximum value, and 0 elsewhere.

`info = compet('code')` returns information according to the code string specified:

`compet('name')` returns the name of this function.

`compet('output',FP)` returns the [min max] output range.

`compet('active',FP)` returns the [min max] active input range.

`compet('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is S-by-S-by-Q or S-by-Q.

`compet('fpnames')` returns the names of the function parameters.

`compet('fpdefaults')` returns the default function parameters.

Examples

Here you define a net input vector *N*, calculate the output, and plot both with bar graphs.

```
n = [0; 1; -0.5; 0.5];  
a = compet(n);  
subplot(2,1,1), bar(n), ylabel('n')  
subplot(2,1,2), bar(a), ylabel('a')
```

Assign this transfer function to layer *i* of a network.

```
net.layers{i}.transferFcn = 'compet';
```

See Also

`sim` | `softmax`

competlayer

Purpose Competitive layer

Syntax `competlayer(numClasses, kohonenLR, conscienceLR)`

Description Competitive layers learn to classify input vectors into a given number of classes, according to similarity between vectors, with a preference for equal numbers of vectors per class.

`competlayer(numClasses, kohonenLR, conscienceLR)` takes these arguments,

<code>numClasses</code>	Number of classes to classify inputs (default = 5)
<code>kohonenLR</code>	Learning rate for Kohonen weights (default = 0.01)
<code>conscienceLR</code>	Learning rate for conscience bias (default = 0.001)

and returns a competitive layer with `numClasses` neurons.

Examples Here a competitive layer is trained to classify 150 iris flowers into 6 classes.

```
inputs = iris_dataset;
net = competlayer(6);
net = train(net, inputs);
view(net)
outputs = net(inputs);
classes = vec2ind(outputs);
```

See Also `selforgmap` | `patternnet` | `lvqnet`

Purpose

Convert concurrent vectors to sequential vectors

Syntax

`S = con2seq(b)`
`S = con2seq(b,TS)`

Description

Neural Network Toolbox™ software arranges concurrent vectors with a matrix, and sequential vectors with a cell array (where the second index is the time step).

`con2seq` and `seq2con` allow concurrent vectors to be converted to sequential vectors, and back again.

`S = con2seq(b)` takes one input,

`b` R-by-TS matrix

and returns one output,

`S` 1-by-TS cell array of R-by-1 vectors

`S = con2seq(b,TS)` can also convert multiple batches,

`b` N-by-1 cell array of matrices with M*TS columns

`TS` Time steps

and returns

`S` N-by-TS cell array of matrices with M columns

Examples

Here a batch of three values is converted to a sequence.

```
p1 = [1 4 2]
p2 = con2seq(p1)
```

con2seq

Here, two batches of vectors are converted to two sequences with two time steps.

```
p1 = {[1 3 4 5; 1 1 7 4]; [7 3 4 4; 6 9 4 1]}  
p2 = con2seq(p1,2)
```

See Also

seq2con | concur

Purpose Create concurrent bias vectors

Syntax `concur(B,Q)`

Description `concur(B,Q)`

B S-by-1 bias vector (or an N1-by-1 cell array of vectors)
Q Concurrent size

and returns an S-by-B matrix of copies of B (or an N1-by-1 cell array of matrices).

Examples Here `concur` creates three copies of a bias vector.

```
b = [1; 3; 2; -1];
concur(b,3)
```

Network Use

To calculate a layer's net input, the layer's weighted inputs must be combined with its biases. The following expression calculates the net input for a layer with the `netsum` net input function, two input weights, and a bias:

```
n = netsum(z1,z2,b)
```

The above expression works if Z1, Z2, and B are all S-by-1 vectors. However, if the network is being simulated by `sim` (or `adapt` or `train`) in response to Q concurrent vectors, then Z1 and Z2 will be S-by-Q matrices. Before B can be combined with Z1 and Z2, you must make Q copies of it.

```
n = netsum(z1,z2,concur(b,q))
```

See Also

`con2seq` | `netprod` | `netsum` | `seq2con` | `sim`

configure

Purpose Configure network inputs and outputs to best match input and target data

Syntax

```
net = configure(net,x,t)
net = configure(net,x)
net = configure(net,'inputs',x,i)
net = configure(net,'outputs',t,i)
```

Description Configuration is the process of setting network input and output sizes and ranges, input preprocessing settings and output postprocessing settings, and weight initialization settings to match input and target data.

Configuration must happen before a network's weights and biases can be initialized. Unconfigured networks are automatically configured and initialized the first time `train` is called. Alternately, a network can be configured manually either by calling this function or by setting a network's input and output sizes, ranges, processing settings, and initialization settings properties manually.

`net = configure(net,x,t)` takes input data `x` and target data `t`, and configures the network's inputs and outputs to match.

`net = configure(net,x)` configures only inputs.

`net = configure(net,'inputs',x,i)` configures the inputs specified with the index vector `i`. If `i` is not specified all inputs are configured.

`net = configure(net,'outputs',t,i)` configures the outputs specified with the index vector `i`. If `i` is not specified all targets are configured.

Examples Here a feedforward network is created and manually configured for a simple fitting problem (as opposed to allowing `train` to configure it).

```
[x,t] = simplefit_dataset;
net = feedforwardnet(20); view(net)
net = configure(net,x,t); view(net)
```

See Also `isconfigured | unconfigure | init | train`

confusion

Purpose Classification confusion matrix

Syntax `[c,cm,ind,per] = confusion(targets,outputs)`

Description `[c,cm,ind,per] = confusion(targets,outputs)` takes these values:

`targets` S-by-Q matrix, where each column vector contains a single 1 value, with all other elements 0. The index of the 1 indicates which of S categories that vector represents.

`outputs` S-by-Q matrix, where each column contains values in the range [0, 1]. The index of the largest element in the column indicates which of S categories that vector represents.

and returns these values:

`c` Confusion value = fraction of samples misclassified

`cm` S-by-S confusion matrix, where $cm(i, j)$ is the number of samples whose target is the i th class that was classified as j

`ind` S-by-S cell array, where $ind\{i, j\}$ contains the indices of samples with the i th target class, but j th output class

`per` S-by-4 matrix, where each row summarizes four percentages associated with the i th class:

```
per(i,1) false negative rate
        = (false negatives)/(all output negatives)
per(i,2) false positive rate
        = (false positives)/(all output positives)
per(i,3) true positive rate
        = (true positives)/(all output positives)
per(i,4) true negative rate
        = (true negatives)/(all output negatives)
```

`[c,cm,ind,per] = confusion(TARGETS,OUTPUTS)` takes these values:

<code>targets</code>	1-by-Q vector of 1/0 values representing membership
<code>outputs</code>	S-by-Q matrix, of value in [0,1] interval, where values greater than or equal to 0.5 indicate class membership

and returns these values:

<code>c</code>	Confusion value = fraction of samples misclassified
<code>cm</code>	2-by-2 confusion matrix
<code>ind</code>	2-by-2 cell array, where <code>ind{i,j}</code> contains the indices of samples whose target is 1 versus 0, and whose output was greater than or equal to 0.5 versus less than 0.5
<code>per</code>	2-by-4 matrix where each <i>i</i> th row represents the percentage of false negatives, false positives, true positives, and true negatives for the class and out-of-class

Examples

```
load simpleclass_dataset
net = newpr(simpleclassInputs,simpleclassTargets,20);
net = train(net,simpleclassInputs,simpleclassTargets);
simpleclassOutputs = sim(net,simpleclassInputs);
[c,cm,ind,per] = ...
confusion(simpleclassTargets,simpleclassOutputs)
```

See Also

`plotconfusion` | `roc`

convwf

Purpose Convolution weight function

Syntax

```
Z = convwf(W,P)
dim = convwf('size',S,R,FP)
dw = convwf('dw',W,P,Z,FP)
info = convwf('code')
```

Description Weight functions apply weights to an input to get weighted inputs. `Z = convwf(W,P)` returns the convolution of a weight matrix `W` and an input `P`.

`dim = convwf('size',S,R,FP)` takes the layer dimension `S`, input dimension `R`, and function parameters, and returns the weight size.

`dw = convwf('dw',W,P,Z,FP)` returns the derivative of `Z` with respect to `W`.

`info = convwf('code')` returns information about this function. The following codes are defined:

'deriv'	Name of derivative function
'fullderiv'	Reduced derivative = 2, full derivative = 1, linear derivative = 0
'pfullderiv'	Input: reduced derivative = 2, full derivative = 1, linear derivative = 0
'wfullderiv'	Weight: reduced derivative = 2, full derivative = 1, linear derivative = 0
'name'	Full name
'fpname'	Returns names of function parameters
'fpdefaults'	Returns default function parameters

Examples Here you define a random weight matrix `W` and input vector `P` and calculate the corresponding weighted input `Z`.

```
W = rand(4,1);  
P = rand(8,1);  
Z = convwf(W,P)
```

Network Use

To change a network so an input weight uses convwf, set `net.inputWeight{i,j}.weightFcn` to 'convwf'. For a layer weight, set `net.layerWeight{i,j}.weightFcn` to 'convwf'.

In either case, call `sim` to simulate the network with convwf.

defaultderiv

Purpose Default derivative function

Syntax `defaultderiv('dperf_dwb',net,X,T,Xi,Ai,EW)`
`defaultderiv('de_dwb',net,X,T,Xi,Ai,EW)`

Description This function chooses the recommended derivative algorithm for the type of network whose derivatives are being calculated. For static networks, `defaultderiv` calls `staticderiv`; for dynamic networks it calls `bttdderiv` to calculate the gradient and `fpderiv` to calculate the Jacobian.

`defaultderiv('dperf_dwb',net,X,T,Xi,Ai,EW)` takes these arguments,

<code>net</code>	Neural network
<code>X</code>	Inputs, an R-by-Q matrix (or N-by-TS cell array of Ri-by-Q matrices)
<code>T</code>	Targets, an S-by-Q matrix (or M-by-TS cell array of Si-by-Q matrices)
<code>Xi</code>	Initial input delay states (optional)
<code>Ai</code>	Initial layer delay states (optional)
<code>EW</code>	Error weights (optional)

and returns the gradient of performance with respect to the network's weights and biases, where R and S are the number of input and output elements and Q is the number of samples (or N and M are the number of input and output signals, Ri and Si are the number of each input and outputs elements, and TS is the number of timesteps).

`defaultderiv('de_dwb',net,X,T,Xi,Ai,EW)` returns the Jacobian of errors with respect to the network's weights and biases.

Examples Here a feedforward network is trained and both the gradient and Jacobian are calculated.


```
[x,t] = simplefit_dataset;  
net = feedforwardnet(10);  
net = train(net,x,t);  
y = net(x);  
perf = perform(net,t,y);  
dwb = defaultderiv('dperf_dwb',net,x,t)
```

See Also

[bttderiv](#) | [fpderiv](#) | [num2deriv](#) | [num5deriv](#) | [staticderiv](#)

disp

Purpose	Neural network properties
Syntax	<code>disp(net)</code>
To Get Help	Type <code>help network/disp</code> .
Description	<code>disp(net)</code> displays a network's properties.
Examples	Here a perceptron is created and displayed. <pre>net = newp([-1 1; 0 2],3); disp(net)</pre>
See Also	<code>display</code> <code>sim</code> <code>init</code> <code>train</code> <code>adapt</code>

Purpose	Name and properties of neural network variables
Syntax	<code>display(net)</code>
To Get Help	Type <code>help network/display</code> .
Description	<code>display(net)</code> displays a network variable's name and properties.
Examples	<p>Here a perceptron variable is defined and displayed.</p> <pre>net = newp([-1 1; 0 2],3); display(net)</pre> <p><code>display</code> is automatically called as follows:</p> <pre>net</pre>
See Also	<code>disp</code> <code>sim</code> <code>init</code> <code>train</code> <code>adapt</code>

dist

Purpose Euclidean distance weight function

Syntax

```
Z = dist(W,P,FP)
dim = dist('size',S,R,FP)
dw = dist('dw',W,P,Z,FP)
D = dist(pos)
info = dist('code')
```

Description Weight functions apply weights to an input to get weighted inputs.

`Z = dist(W,P,FP)` takes these inputs,

W	S-by-R weight matrix
P	R-by-Q matrix of Q input (column) vectors
FP	Struct of function parameters (optional, ignored)

and returns the S-by-Q matrix of vector distances.

`dim = dist('size',S,R,FP)` takes the layer dimension S, input dimension R, and function parameters, and returns the weight size [S-by-R].

`dw = dist('dw',W,P,Z,FP)` returns the derivative of Z with respect to W.

`dist` is also a layer distance function which can be used to find the distances between neurons in a layer.

`D = dist(pos)` takes one argument,

pos	N-by-S matrix of neuron positions
-----	-----------------------------------

and returns the S-by-S matrix of distances.

`info = dist('code')` returns information about this function. The following codes are supported:

'deriv'	Name of derivative function
'fullderiv'	Full derivative = 1, linear derivative = 0
'pfullderiv'	Input: reduced derivative = 2, full derivative = 1, linear derivative = 0
'name'	Full name
'fpnames'	Returns names of function parameters
'fpdefaults'	Returns default function parameters

Examples

Here you define a random weight matrix *W* and input vector *P* and calculate the corresponding weighted input *Z*.

```
W = rand(4,3);
P = rand(3,1);
Z = dist(W,P)
```

Here you define a random matrix of positions for 10 neurons arranged in three-dimensional space and find their distances.

```
pos = rand(3,10);
D = dist(pos)
```

Network Use

You can create a standard network that uses `dist` by calling `newpnn` or `newgrnn`.

To change a network so an input weight uses `dist`, set `net.inputWeight{i,j}.weightFcn` to `'dist'`. For a layer weight, set `net.layerWeight{i,j}.weightFcn` to `'dist'`.

To change a network so that a layer's topology uses `dist`, set `net.layers{i}.distanceFcn` to `'dist'`.

In either case, call `sim` to simulate the network with `dist`.

See `newpnn` or `newgrnn` for simulation examples.

dist

Algorithms

The Euclidean distance d between two vectors X and Y is

$$d = \text{sum}((x-y).^2).^0.5$$

See Also

`sim` | `dotprod` | `negdist` | `normprod` | `mandist` | `linkdist`

Purpose Distributed delay network

Syntax `distdelaynet(delays,hiddenSizes,trainFcn)`

Description Distributed delay networks are similar to feedforward networks, except that each input and layer weights has a tap delay line associated with it. This allows the network to have a finite dynamic response to time series input data. This network is also similar to the time delay neural network (`timedelaynet`), which only has delays on the input weight.

`distdelaynet(delays,hiddenSizes,trainFcn)` takes these arguments,

<code>delays</code>	Row vector of increasing 0 or positive delays (default = 1:2)
<code>hiddenSizes</code>	Row vector of one or more hidden layer sizes (default = 10)
<code>trainFcn</code>	Training function (default = 'trainlm')

and returns a distributed delay neural network.

Examples Here a distributed delay neural network is used to solve a simple time series problem.

```
[X,T] = simpleseries_dataset;  
net = distdelaynet({1:2,1:2},10)  
[Xs,Xi,Ai,Ts] = preparets(net,X,T)  
net = train(net,Xs,Ts,Xi,Ai);  
view(net)  
Y = net(Xs,Xi,Ai);  
perf = perform(net,Y,Ts)
```

See Also `preparets` | `removedelay` | `timedelaynet` | `narnet` | `narxnet`

divideblock

Purpose Divide targets into three sets using blocks of indices

Syntax `[trainInd,valInd,testInd] = divideblock(Q,trainRatio,valRatio, testRatio)`

Description `[trainInd,valInd,testInd] = divideblock(Q,trainRatio,valRatio,testRatio)` separates targets into three sets: training, validation, and testing. It takes the following inputs:

<code>Q</code>	Number of targets to divide up.
<code>trainRatio</code>	Ratio of targets for training. Default = 0.7.
<code>valRatio</code>	Ratio of targets for validation. Default = 0.15.
<code>testRatio</code>	Ratio of targets for testing. Default = 0.15.

and returns

<code>trainInd</code>	Training indices
<code>valInd</code>	Validation indices
<code>testInd</code>	Test indices

Examples `[trainInd,valInd,testInd] = divideblock(3000,0.6,0.2,0.2);`

Network Use Here are the network properties that define which data division function to use, what its parameters are, and what aspects of targets are divided up, when `train` is called.

```
net.divideFcn
net.divideParam
net.divideMode
```

See Also `divideind | divideint | dividerand | dividetrain`

Purpose

Divide targets into three sets using specified indices

Syntax

```
[trainInd, valInd, testInd] = divideind(Q, trainInd, valInd,
    testInd)
```

Description

[trainInd, valInd, testInd] = divideind(Q, trainInd, valInd, testInd) separates targets into three sets: training, validation, and testing, according to indices provided. It actually returns the same indices it receives as arguments; its purpose is to allow the indices to be used for training, validation, and testing for a network to be set manually.

It takes the following inputs,

Q	Number of targets to divide up
trainInd	Training indices
valInd	Validation indices
testInd	Test indices

and returns

trainInd	Training indices (unchanged)
valInd	Validation indices (unchanged)
testInd	Test indices (unchanged)

Examples

```
[trainInd, valInd, testInd] = ...
divideind(3000, 1:2000, 2001:2500, 2501:3000);
```

Network Use

Here are the network properties that define which data division function to use, what its parameters are, and what aspects of targets are divided up, when train is called.

divideind

```
net.divideFcn  
net.divideParam  
net.divideMode
```

See Also

divideblock | divideint | dividerand | dividetrain

Purpose	Divide targets into three sets using interleaved indices														
Syntax	<code>[trainInd,valInd,testInd] = divideint(Q,trainRatio,valRatio, testRatio)</code>														
Description	<p><code>[trainInd,valInd,testInd] = divideint(Q,trainRatio,valRatio,testRatio)</code> separates targets into three sets: training, validation, and testing. It takes the following inputs,</p> <table> <tr> <td><code>Q</code></td> <td>Number of targets to divide up.</td> </tr> <tr> <td><code>trainRatio</code></td> <td>Ratio of vectors for training. Default = 0.7.</td> </tr> <tr> <td><code>valRatio</code></td> <td>Ratio of vectors for validation. Default = 0.15.</td> </tr> <tr> <td><code>testRatio</code></td> <td>Ratio of vectors for testing. Default = 0.15.</td> </tr> </table> <p>and returns</p> <table> <tr> <td><code>trainInd</code></td> <td>Training indices</td> </tr> <tr> <td><code>valInd</code></td> <td>Validation indices</td> </tr> <tr> <td><code>testInd</code></td> <td>Test indices</td> </tr> </table>	<code>Q</code>	Number of targets to divide up.	<code>trainRatio</code>	Ratio of vectors for training. Default = 0.7.	<code>valRatio</code>	Ratio of vectors for validation. Default = 0.15.	<code>testRatio</code>	Ratio of vectors for testing. Default = 0.15.	<code>trainInd</code>	Training indices	<code>valInd</code>	Validation indices	<code>testInd</code>	Test indices
<code>Q</code>	Number of targets to divide up.														
<code>trainRatio</code>	Ratio of vectors for training. Default = 0.7.														
<code>valRatio</code>	Ratio of vectors for validation. Default = 0.15.														
<code>testRatio</code>	Ratio of vectors for testing. Default = 0.15.														
<code>trainInd</code>	Training indices														
<code>valInd</code>	Validation indices														
<code>testInd</code>	Test indices														
Examples	<code>[trainInd,valInd,testInd] = divideint(3000,0.6,0.2,0.2);</code>														
Network Use	<p>Here are the network properties that define which data division function to use, what its parameters are, and what aspects of targets are divided up, when train is called.</p> <pre>net.divideFcn net.divideParam net.divideMode</pre>														
See Also	<code>divideblock divideind dividerand dividetrain</code>														

dividerand

Purpose

Divide targets into three sets using random indices

Syntax

```
[trainInd,valInd,testInd] = dividerand(Q,trainRatio,valRatio,  
    testRatio)
```

Description

[trainInd,valInd,testInd] = dividerand(Q,trainRatio,valRatio,testRatio) separates targets into three sets: training, validation, and testing. It takes the following inputs,

Q	Number of targets to divide up.
trainRatio	Ratio of vectors for training. Default = 0.7.
valRatio	Ratio of vectors for validation. Default = 0.15.
testRatio	Ratio of vectors for testing. Default = 0.15.

and returns

trainInd	Training indices
valInd	Validation indices
testInd	Test indices

Examples

```
[trainInd,valInd,testInd] = dividerand(3000,0.6,0.2,0.2);
```

Network Use

Here are the network properties that define which data division function to use, what its parameters are, and what aspects of targets are divided up, when train is called.

```
net.divideFcn  
net.divideParam  
net.divideMode
```

See Also

divideblock | divideind | divideint | dividetrain

Purpose	Assign all targets to training set								
Syntax	<pre>[trainInd,valInd,testInd] = dividetrain(Q,trainRatio,valRatio, testRatio)</pre>								
Description	<p>[trainInd,valInd,testInd] = dividetrain(Q,trainRatio,valRatio,testRatio) assigns all targets to the training set and no targets to either the validation or test sets. It takes the following inputs,</p> <table><tr><td>Q</td><td>Number of targets to divide up.</td></tr></table> <p>and returns</p> <table><tr><td>trainInd</td><td>Training indices equal to 1:Q</td></tr><tr><td>valInd</td><td>Empty validation indices, []</td></tr><tr><td>testInd</td><td>Empty test indices, []</td></tr></table>	Q	Number of targets to divide up.	trainInd	Training indices equal to 1:Q	valInd	Empty validation indices, []	testInd	Empty test indices, []
Q	Number of targets to divide up.								
trainInd	Training indices equal to 1:Q								
valInd	Empty validation indices, []								
testInd	Empty test indices, []								
Examples	<pre>[trainInd,valInd,testInd] = dividetrain(3000);</pre>								
Network Use	<p>Here are the network properties that define which data division function to use, what its parameters are, and what aspects of targets are divided up, when train is called.</p> <pre>net.divideFcn net.divideParam net.divideMode</pre>								
See Also	<pre>divideblock divideind divideint dividerand</pre>								

dotprod

Purpose Dot product weight function

Syntax

```
Z = dotprod(W,P,FP)
dim = dotprod('size',S,R,FP)
dw = dotprod('dw',W,P,Z,FP)
info = dotprod('code')
```

Description Weight functions apply weights to an input to get weighted inputs.

`Z = dotprod(W,P,FP)` takes these inputs,

W	S-by-R weight matrix
P	R-by-Q matrix of Q input (column) vectors
FP	Struct of function parameters (optional, ignored)

and returns the S-by-Q dot product of W and P.

`dim = dotprod('size',S,R,FP)` takes the layer dimension S, input dimension R, and function parameters, and returns the weight size [S-by-R].

`dw = dotprod('dw',W,P,Z,FP)` returns the derivative of Z with respect to W.

`info = dotprod('code')` returns information about this function. The following codes are defined:

'deriv'	Name of derivative function
'pfullderiv'	Input: reduced derivative = 2, full derivative = 1, linear derivative = 0
'wfullderiv'	Weight: reduced derivative = 2, full derivative = 1, linear derivative = 0

'name'	Full name
'fpnames'	Returns names of function parameters
'fpdefaults'	Returns default function parameters

Examples

Here you define a random weight matrix W and input vector P and calculate the corresponding weighted input Z .

```
W = rand(4,3);  
P = rand(3,1);  
Z = dotprod(W,P)
```

Network Use

You can create a standard network that uses dotprod by calling `feedforwardnet`.

To change a network so an input weight uses dotprod, set `net.inputWeight{i,j}.weightFcn` to 'dotprod'. For a layer weight, set `net.layerWeight{i,j}.weightFcn` to 'dotprod'.

In either case, call `sim` to simulate the network with dotprod.

See Also

`sim` | `dist` | `feedforwardnet` | `negdist` | `normprod`

elliotsig

Purpose Elliot symmetric sigmoid transfer function

Syntax `A = elliotsig(N)`

Description Transfer functions convert a neural network layer's net input into its net output.

`A = elliotsig(N)` takes an S -by- Q matrix of S N -element net input column vectors and returns an S -by- Q matrix A of output vectors, where each element of N is squashed from the interval $[-\infty \infty]$ to the interval $[-1 \ 1]$ with an “S-shaped” function.

The advantage of this transfer function over other sigmoids is that it is fast to calculate on simple computing hardware as it does not require any exponential or trigonometric functions. Its disadvantage is that it only flattens out for large inputs, so its effect is not as local as other sigmoid functions. This might result in more training iterations, or require more neurons to achieve the same accuracy.

Examples Calculate a layer output from a single net input vector:

```
n = [0; 1; -0.5; 0.5];  
a = elliotsig(n);
```

Plot the transfer function:

```
n = -5:0.01:5;  
plot(n, elliotsig(n))  
set(gca, 'dataaspectratio', [1 1 1], 'xgrid', 'on', 'ygrid', 'on')
```

For a network you have already defined, change the transfer function for layer i :

```
net.layers{i}.transferFcn = 'elliotsig';
```

See Also `elliott2sig` | `logsig` | `tansig`

Purpose Elliot 2 symmetric sigmoid transfer function

Syntax `A = elliott2sig(N)`

Description Transfer functions convert a neural network layer’s net input into its net output. This function is a variation on the original Elliot sigmoid function. It has a steeper slope, closer to `tansig`, but is not as smooth at the center.

`A = elliott2sig(N)` takes an `S`-by-`Q` matrix of `S` `N`-element net input column vectors and returns an `S`-by-`Q` matrix `A` of output vectors, where each element of `N` is squashed from the interval `[-inf inf]` to the interval `[-1 1]` with an “S-shaped” function.

The advantage of this transfer function over other sigmoids is that it is fast to calculate on simple computing hardware as it does not require any exponential or trigonometric functions. Its disadvantage is that it departs from the classic sigmoid shape around zero.

Examples Calculate a layer output from a single net input vector:

```
n = [0; 1; -0.5; 0.5];
a = elliott2sig(n);
```

Plot the transfer function:

```
n = -5:0.01:5;
plot(n, elliott2sig(n))
set(gca, 'dataaspectratio', [1 1 1], 'xgrid', 'on', 'ygrid', 'on')
```

For a network you have already defined, change the transfer function for layer `i`:

```
net.layers{i}.transferFcn = 'elliott2sig';
```

See Also `elliotsig` | `logsig` | `tansig`

elmannet

Purpose Elman neural network

Syntax `elmannet(layerdelays,hiddenSizes,trainFcn)`

Description Elman networks are feedforward networks (`feedforwardnet`) with the addition of layer recurrent connections with tap delays.

With the availability of full dynamic derivative calculations (`fpderiv` and `bttderiv`), the Elman network is no longer recommended except for historical and research purposes. For more accurate learning try time delay (`timedelaynet`), layer recurrent (`layrecnet`), NARX (`narxnet`), and NAR (`narnet`) neural networks.

Elman networks with one or more hidden layers can learn any dynamic input-output relationship arbitrarily well, given enough neurons in the hidden layers. However, Elman networks use simplified derivative calculations (using `staticderiv`, which ignores delayed connections) at the expense of less reliable learning.

`elmannet(layerdelays,hiddenSizes,trainFcn)` takes these arguments,

<code>layerdelays</code>	Row vector of increasing 0 or positive delays (default = 1:2)
<code>hiddenSizes</code>	Row vector of one or more hidden layer sizes (default = 10)
<code>trainFcn</code>	Training function (default = 'trainlm')

and returns an Elman neural network.

Examples

Here an Elman neural network is used to solve a simple time series problem.

```
[X,T] = simpleseries_dataset;  
net = elmannet(1:2,10);  
[Xs,Xi,Ai,Ts] = preparets(net,X,T);
```

```
net = train(net,Xs,Ts,Xi,Ai);  
view(net)  
Y = net(Xs,Xi,Ai);  
perf = perform(net,Ts,Y)
```

See Also

[preparets](#) | [removedelay](#) | [timedelaynet](#) | [layrechnet](#) | [narnet](#)
| [narxnet](#)

errsurf

Purpose Error surface of single-input neuron

Syntax `errsurf(P,T,WV,BV,F)`

Description `errsurf(P,T,WV,BV,F)` takes these arguments,

P	1-by-Q matrix of input vectors
T	1-by-Q matrix of target vectors
WV	Row vector of values of W
BV	Row vector of values of B
F	Transfer function (string)

and returns a matrix of error values over WV and BV.

Examples

```
p = [-6.0 -6.1 -4.1 -4.0 +4.0 +4.1 +6.0 +6.1];  
t = [+0.0 +0.0 +.97 +.99 +.01 +.03 +1.0 +1.0];  
wv = -1:.1:1; bv = -2.5:.25:2.5;  
es = errsurf(p,t,wv,bv,'logsig');  
plotes(wv,bv,es,[60 30])
```

See Also

`plotes`

Purpose Extend time series data to given number of timesteps

Syntax `extends(x, ts, v)`

Description `extends(x, ts, v)` takes these values,

<code>x</code>	Neural network time series data
<code>ts</code>	Number of timesteps
<code>v</code>	Value

and returns the time series data either extended or truncated to match the specified number of timesteps. If the value `v` is specified, then extended series are filled in with that value, otherwise they are extended with random values.

Examples Here, a 20-timestep series is created and then extended to 25 timesteps with the value zero.

```
x = nndata(5,4,20);
y = extends(x,25,0)
```

See Also `nndata` | `catsamples` | `preparets`

feedforwardnet

Purpose Feedforward neural network

Syntax `feedforwardnet(hiddenSizes,trainFcn)`

Description Feedforward networks consist of a series of layers. The first layer has a connection from the network input. Each subsequent layer has a connection from the previous layer. The final layer produces the network's output.

Feedforward networks can be used for any kind of input to output mapping. A feedforward network with one hidden layer and enough neurons in the hidden layers, can fit any finite input-output mapping problem.

Specialized versions of the feedforward network include fitting (`fitnet`) and pattern recognition (`patternnet`) networks. A variation on the feedforward network is the cascade forward network (`cascadeforwardnet`) which has additional connections from the input to every layer, and from each layer to all following layers.

`feedforwardnet(hiddenSizes,trainFcn)` takes these arguments,

<code>hiddenSizes</code>	Row vector of one or more hidden layer sizes (default = 10)
<code>trainFcn</code>	Training function (default = 'trainlm')

and returns a feedforward neural network.

Examples Here a feedforward neural network is used to solve a simple problem.

```
[x,t] = simplefit_dataset;  
net = feedforwardnet(10)  
net = train(net,x,t);  
view(net)  
y = net(x);  
perf = perform(net,y,t)
```

See Also

[fitnet](#) | [patternnet](#) | [cascadeforwardnet](#)

fitnet

Purpose Function fitting neural network

Syntax `fitnet(hiddenSizes,trainFcn)`

Description Fitting networks are feedforward neural networks (`feedforwardnet`) used to fit an input-output relationship.

`fitnet(hiddenSizes,trainFcn)` takes these arguments,

`hiddenSizes` Row vector of one or more hidden layer sizes (default = 10)

`trainFcn` Training function (default = 'trainlm')

and returns a fitting neural network.

Examples Here a fitting neural network is used to solve a simple problem.

```
[x,t] = simplefit_dataset;  
net = fitnet(10)  
net = train(net,x,t);  
view(net)  
y = net(x);  
perf = perform(net,y,t)
```

See Also `feedforwardnet` | `nftool`

Purpose

Process data by marking rows with unknown values

Syntax

```
[y,ps] = fixunknowns(X)
[y,ps] = fixunknowns(X,FP)
Y = fixunknowns('apply',X,PS)
X = fixunknowns('reverse',Y,PS)
name = fixunknowns('name')
fp = fixunknowns('pdefaults')
pd = fixunknowns('pdesc')
fixunknowns('pcheck',fp)
```

Description

fixunknowns processes matrixes by replacing each row containing unknown values (represented by NaN) with two rows of information.

The first row contains the original row, with NaN values replaced by the row's mean. The second row contains 1 and 0 values, indicating which values in the first row were known or unknown, respectively.

[y,ps] = fixunknowns(X) takes these inputs,

X	Single N-by-Q matrix or a 1-by-TS row cell array of N-by-Q matrices
---	---

and returns

Y	Each M-by-Q matrix with M - N rows added (optional)
---	---

PS	Process settings that allow consistent processing of values
----	---

[y,ps] = fixunknowns(X,FP) takes an empty struct FP of parameters.

Y = fixunknowns('apply',X,PS) returns Y, given X and settings PS.

X = fixunknowns('reverse',Y,PS) returns X, given Y and settings PS.

fixunknowns

`name = fixunknowns('name')` returns the name of this process method.

`fp = fixunknowns('pdefaults')` returns the default process parameter structure.

`pd = fixunknowns('pdesc')` returns the process parameter descriptions.

`fixunknowns('pcheck',fp)` throws an error if any parameter is illegal.

Examples

Here is how to format a matrix with a mixture of known and unknown values in its second row:

```
x1 = [1 2 3 4; 4 NaN 6 5; NaN 2 3 NaN]
[y1,ps] = fixunknowns(x1)
```

Next, apply the same processing settings to new values:

```
x2 = [4 5 3 2; NaN 9 NaN 2; 4 9 5 2]
y2 = fixunknowns('apply',x2,ps)
```

Reverse the processing of `y1` to get `x1` again.

```
x1_again = fixunknowns('reverse',y1,ps)
```

Definitions

If you have input data with unknown values, you can represent them with NaN values. For example, here are five 2-element vectors with unknown values in the first element of two of the vectors:

```
p1 = [1 NaN 3 2 NaN; 3 1 -1 2 4];
```

The network will not be able to process the NaN values properly. Use the function `fixunknowns` to transform each row with NaN values (in this case only the first row) into two rows that encode that same information numerically.

```
[p2,ps] = fixunknowns(p1);
```

Here is how the first row of values was recoded as two rows.

```
p2 =  
  1  2  3  2  2  
  1  0  1  1  0  
  3  1 -1  2  4
```

The first new row is the original first row, but with the mean value for that row (in this case 2) replacing all NaN values. The elements of the second new row are now either 1, indicating the original element was a known value, or 0 indicating that it was unknown. The original second row is now the new third row. In this way both known and unknown values are encoded numerically in a way that lets the network be trained and simulated.

Whenever supplying new data to the network, you should transform the inputs in the same way, using the settings `ps` returned by `fixunknowns` when it was used to transform the training input data.

```
p2new = fixunknowns('apply',p1new,ps);
```

The function `fixunknowns` is only recommended for input processing. Unknown targets represented by NaN values can be handled directly by the toolbox learning algorithms. For instance, performance functions used by backpropagation algorithms recognize NaN values as unknown or unimportant values.

See Also

`mapminmax` | `mapstd` | `processpca`

formwb

Purpose Form bias and weights into single vector

Syntax `formwb(net,b,IW,LW)`

Description `formwb(net,b,IW,LW)` takes a neural network and bias `b`, input weight `IW`, and layer weight `LW` values, and combines the values into a single vector.

Examples Here a network is created, configured, and its weights and biases formed into a vector.

```
[x,t] = simplefit_dataset;  
net = feedforwardnet(10);  
net = configure(net,x,t);  
wb = formwb(net,net.b,net.IW,net.LW)
```

See Also `getwb` | `setwb` | `separatewb`

Purpose Forward propagation derivative function

Syntax `fpderiv('dperf_dwb',net,X,T,Xi,Ai,EW)`
`fpderiv('de_dwb',net,X,T,Xi,Ai,EW)`

Description This function calculates derivatives using the chain rule from inputs to outputs, and in the case of dynamic networks, forward through time.

`fpderiv('dperf_dwb',net,X,T,Xi,Ai,EW)` takes these arguments,

<code>net</code>	Neural network
<code>X</code>	Inputs, an R-by-Q matrix (or N-by-TS cell array of Ri-by-Q matrices)
<code>T</code>	Targets, an S-by-Q matrix (or M-by-TS cell array of Si-by-Q matrices)
<code>Xi</code>	Initial input delay states (optional)
<code>Ai</code>	Initial layer delay states (optional)
<code>EW</code>	Error weights (optional)

and returns the gradient of performance with respect to the network's weights and biases, where R and S are the number of input and output elements and Q is the number of samples (or N and M are the number of input and output signals, Ri and Si are the number of each input and outputs elements, and TS is the number of timesteps).

`fpderiv('de_dwb',net,X,T,Xi,Ai,EW)` returns the Jacobian of errors with respect to the network's weights and biases.

Examples

Here a feedforward network is trained and both the gradient and Jacobian are calculated.

```
[x,t] = simplefit_dataset;
net = feedforwardnet(20);
net = train(net,x,t);
```

fpderiv

```
y = net(x);  
perf = perform(net,t,y);  
gwb = fpderiv('dperf_dwb',net,x,t)  
jwb = fpderiv('de_dwb',net,x,t)
```

See Also

[bttderiv](#) | [defaultderiv](#) | [num2deriv](#) | [num5deriv](#) | [staticderiv](#)

Purpose Convert data from standard neural network cell array form

Syntax `fromnndata(x,toMatrix,columnSample,cellTime)`

Description `fromnndata(x,toMatrix,columnSample,cellTime)` takes these arguments,

<code>net</code>	Neural network
<code>toMatrix</code>	True if result is to be in matrix form
<code>columnSample</code>	True if samples are to be represented as columns, false if rows
<code>cellTime</code>	True if time series are to be represented as a cell array, false if represented with a matrix

and returns the original data reformatted accordingly.

Examples

Here time-series data is converted from a matrix representation to standard cell array representation, and back. The original data consists of a 5-by-6 matrix representing one time-series sample consisting of a 5-element vector over 6 timesteps arranged in a matrix with the samples as columns.

```
x = rands(5,6)
columnSamples = true; % samples are by columns.
cellTime = false; % time-steps represented by a matrix, not cell.
[y,wasMatrix] = tonndata(x,columnSamples,cellTime)
x2 = fromnndata(y,wasMatrix,columnSamples,cellTime)
```

Here data is defined in standard neural network data cell form. Converting this data does not change it. The data consists of three time series samples of 2-element signals over 3 timesteps.

```
x = {rands(2,3); rands(2,3); rands(2,3)}
columnSamples = true;
cellTime = true;
[y,wasMatrix] = tonndata(x)
```

fromnndata

```
x2 = fromnndata(y,wasMatrix,columnSamples)
```

See Also

tonndata

Purpose Generalized addition

Syntax `gadd(a,b)`

Description This function generalizes matrix addition to the addition of cell arrays of matrices combined in an element-wise fashion.

`gadd(a,b)` takes two matrices or cell arrays, and adds them in an element-wise manner.

Examples Here matrix and cell array values are added.

```
gadd([1 2 3; 4 5 6],[10;20])  
gadd({1 2; 3 4},{1 3; 5 2})  
gadd({1 2 3 4},{10;20;30})
```

See Also `gsubtract` | `gmultiply` | `gdivide` | `gnegate` | `gsqrt`

gdivide

Purpose Generalized division

Syntax `gdivide(a,b)`

Description This function generalizes matrix element-wise division to the division of cell arrays of matrices combined in an element-wise fashion.

`gdivide(a,b)` takes two matrices or cell arrays, and divides them in an element-wise manner.

Examples Here matrix and cell array values are added.

```
gdivide([1 2 3; 4 5 6],[10;20])
gdivide({1 2; 3 4},{1 3; 5 2})
gdivide({1 2 3 4},{10;20;30})
```

See Also `gadd` | `gsubtract` | `gmultiply` | `gnegate` | `gsqrt`

Purpose Generate Simulink block for neural network simulation

Syntax `gensim(net,st)`

To Get Help Type `help network/gensim`.

Description `gensim(net,st)` creates a Simulink® system containing a block that simulates neural network `net`.

`gensim(net,st)` takes these inputs:

<code>net</code>	Neural network
<code>st</code>	Sample time (default = 1)

and creates a Simulink system containing a block that simulates neural network `net` with a sampling time of `st`.

If `net` has no input or layer delays (`net.numInputDelays` and `net.numLayerDelays` are both 0), you can use `-1` for `st` to get a network that samples continuously.

Examples

```
[x,t] = simplefit_dataset;  
net = feedforwardnet(10);  
net = train(net,x,t)  
gensim(net)
```

getelements

Purpose Get neural network data elements

Syntax `getelements(x,ind)`

Description `getelements(x,ind)` returns the elements of neural network data `x` indicated by the indices `ind`. The neural network data may be in matrix or cell array form.

If `x` is a matrix, the result is the `ind` rows of `x`.

If `x` is a cell array, the result is a cell array with as many columns as `x`, whose elements `(1,i)` are matrices containing the `ind` rows of `[x{:},i]`.

Examples This code gets elements 1 and 3 from matrix data:

```
x = [1 2 3; 4 7 4]
y = getelements(x,[1 3])
```

This code gets elements 1 and 3 from cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
y = getelements(x,[1 3])
```

See Also `nndata` | `numelements` | `setelements` | `catelements` | `getsamples` | `gettimesteps` | `getsignals`

Purpose Get neural network data samples

Syntax `getsamples(x,ind)`

Description `getsamples(x,ind)` returns the samples of neural network data `x` indicated by the indices `ind`. The neural network data may be in matrix or cell array form.

If `x` is a matrix, the result is the `ind` columns of `x`.

If `x` is a cell array, the result is a cell array the same size as `x`, whose elements are the `ind` columns of the matrices in `x`.

Examples This code gets samples 1 and 3 from matrix data:

```
x = [1 2 3; 4 7 4]
y = getsamples(x,[1 3])
```

This code gets elements 1 and 3 from cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
y = getsamples(x,[1 3])
```

See Also `nndata` | `numsamples` | `setsamples` | `catsamples` | `getelements` | `gettimesteps` | `getsignals`

getsignals

Purpose Get neural network data signals

Syntax `getsignals(x,ind)`

Description `getsignals(x,ind)` returns the signals of neural network data `x` indicated by the indices `ind`. The neural network data may be in matrix or cell array form.

If `x` is a matrix, `ind` may only be 1, which will return `x`, or `[]` which will return an empty matrix.

If `x` is a cell array, the result is the `ind` rows of `x`.

Examples This code gets signal 2 from cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
y = getsignals(x,2)
```

See Also `nndata` | `numsignals` | `setsignals` | `catsignals` | `getelements` | `getsamples` | `gettimesteps`

Purpose Get Simulink neural network block initial input and layer delays states

Syntax `[xi,ai] = getsiminit(sysName,netName,net)`

Description `[xi,ai] = getsiminit(sysName,netName,net)` takes these arguments,

<code>sysName</code>	The name of the Simulink system containing the neural network block
<code>netName</code>	The name of the Simulink neural network block
<code>net</code>	The original neural network

and returns,

<code>xi</code>	Initial input delay states
<code>ai</code>	Initial layer delay states

Examples

Here a NARX network is designed. The NARX network has a standard input and an open-loop feedback output to an associated feedback input.

```
[x,t] = simplenarx_dataset;
net = narxnet(1:2,1:2,20);
view(net)
[xs,xi,ai,ts] = preparets(net,x,{},t);
net = train(net,xs,ts,xi,ai);
y = net(xs,xi,ai);
```

Now the network is converted to closed-loop, and the data is reformatted to simulate the network's closed-loop response.

```
net = closeloop(net);
view(net)
[xs,xi,ai,ts] = preparets(net,x,{},t);
```

```
y = net(xs,xi,ai);
```

Here the network is converted to a Simulink system with workspace input and output ports. Its delay states are initialized, inputs X1 defined in the workspace, and it is ready to be simulated in Simulink.

```
[sysName,netName] = gensim(net,'InputMode','Workspace',...  
    'OutputMode','WorkSpace','SolverMode','Discrete');  
setsiminit(sysName,netName,net,xi,ai,1);  
x1 = nndata2sim(x,1,1);
```

Finally the initial input and layer delays are obtained from the Simulink model. (They will be identical to the values set with `setsiminit`.)

```
[xi,ai] = getsiminit(sysName,netName,net);
```

See Also

[gensim](#) | [setsiminit](#) | [nndata2sim](#) | [sim2nndata](#)

Purpose Get neural network data timesteps

Syntax `gettimesteps(x,ind)`

Description `gettimesteps(x,ind)` returns the timesteps of neural network data `x` indicated by the indices `ind`. The neural network data may be in matrix or cell array form.

If `x` is a matrix, `ind` can only be 1, which will return `x`; or `[]`, which will return an empty matrix.

If `x` is a cell array the result is the `ind` columns of `x`.

Examples This code gets timestep 2 from cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
y = gettimesteps(x,2)
```

See Also `nndata` | `numtimesteps` | `settimesteps` | `cattimesteps` | `getelements` | `getsamples` | `getsignals`

getwb

Purpose Get network weight and bias values as single vector

Syntax `getwb(net)`

Description `getwb(net)` returns a neural network's weight and bias values as a single vector.

Examples Here a feedforward network is trained to fit some data, then its bias and weight values are formed into a vector.

```
[x,t] = simplefit_dataset;  
net = feedforwardnet(20);  
net = train(net,x,t);  
wb = getwb(net)
```

See Also `setwb` | `formwb` | `separatewb`

Purpose Generalized multiplication

Syntax `gmultiply(a,b)`

Description This function generalizes matrix multiplication to the multiplication of cell arrays of matrices combined in an element-wise fashion.

`gmultiply(a,b)` takes two matrices or cell arrays, and multiplies them in an element-wise manner.

Examples Here matrix and cell array values are added.

```
gmultiply([1 2 3; 4 5 6],[10;20])  
gmultiply({1 2; 3 4},{1 3; 5 2})  
gmultiply({1 2 3 4},{10;20;30})
```

See Also `gadd` | `gsubtract` | `gdivide` | `gnegate` | `gsqrt`

gnegate

Purpose Generalized negation

Syntax `gnegate(x)`

Description This function generalizes matrix negation to the negation of cell arrays of matrices combined in an element-wise fashion.

`gnegate(x)` takes a matrix or cell array of matrices, and negates the matrices.

Examples Here is an example of negating a cell array:

```
x = {[1 2; 3 4],[1 3; 5 2]};  
y = gnegate(x);  
y{1}, y{2}
```

See Also `gadd` | `gsubtract` | `gdivide` | `gmultiply` | `gsqrt`

Purpose Reformat neural data back from GPU

Syntax

```
X = gpu2nndata(Y,Q)
X = gpu2nndata(Y)
X = gpu2nndata(Y,Q,N,TS)
```

Description Training and simulation of neural networks require that matrices be transposed. But they do not require (although they are more efficient with) padding of column length so that each column is memory aligned. This function copies data back from the current GPU and reverses this transform. It can be used on data formatted with `nndata2gpu` or on the results of network simulation.

`X = gpu2nndata(Y,Q)` copies the `QQ`-by-`N` gpuArray `Y` into RAM, takes the first `Q` rows and transposes the result to get an `N`-by-`Q` matrix representing `Q` `N`-element vectors.

`X = gpu2nndata(Y)` calculates `Q` as the index of the last row in `Y` that is not all NaN values (those rows were added to pad `Y` for efficient GPU computation by `nndata2gpu`). `Y` is then transformed as before.

`X = gpu2nndata(Y,Q,N,TS)` takes a `QQ`-by-`(N*TS)` gpuArray where `N` is a vector of signal sizes, `Q` is the number of samples (less than or equal to the number of rows after alignment padding `QQ`), and `TS` is the number of time steps.

The gpuArray `Y` is copied back into RAM, the first `Q` rows are taken, and then it is partitioned and transposed into an `M`-by-`TS` cell array, where `M` is the number of elements in `N`. Each `Y{i,ts}` is an `N(i)`-by-`Q` matrix.

Examples Copy a matrix to the GPU and back:

```
x = rand(5,6)
[y,q] = nndata2gpu(x)
x2 = gpu2nndata(y,q)
```

Copy from the GPU a neural network cell array data representing four time series, each consisting of five time steps of 2-element and 3-element signals.

gpu2nndata

```
x = nndata([2;3],4,5)
[y,q,n,ts] = nndata2gpu(x)
x2 = gpu2nndata(y,q,n,ts)
```

See Also

[nndata2gpu](#)

Purpose	Grid layer topology function
Syntax	<code>gridtop(dim1,dim2,...,dimN)</code>
Description	<p><code>pos = gridtop</code> calculates neuron positions for layers whose neurons are arranged in an N-dimensional grid.</p> <p><code>gridtop(dim1,dim2,...,dimN)</code> takes N arguments,</p> <p><code>dim_i</code> Length of layer in dimension <i>i</i></p> <p>and returns an N-by-S matrix of N coordinate vectors where S is the product of <code>dim1*dim2*...*dimN</code>.</p>
Examples	<p>This code uses <code>gridtop</code> to directly create a two-dimensional layer with 40 neurons arranged in an 8-by-5 grid; then uses the function as an input to <code>selforgmap</code> to create weight positions of neurons for a self-organizing map and plots the neuron topology.</p> <pre>pos = gridtop(8,5); net = selforgmap([8 5], 'topologyFcn', 'gridtop'); plotsomtop(net)</pre>
See Also	<code>hextop</code> <code>randtop</code> <code>tritop</code>

gsqrt

Purpose Generalized square root

Syntax `gsqrt(x)`

Description This function generalizes matrix element-wise square root to the square root of cell arrays of matrices combined in an element-wise fashion.

`gsqrt(x)` takes a matrix or cell array of matrices, and takes the element-wise square root of the matrices.

Examples Here is an example of taking the element-wise square root of a cell array:

```
gsqrt({1 2; 3 4},{1 3; 5 2})
```

See Also `gadd` | `gsubtract` | `gdivide` | `gmultiply` | `gnegate`

Purpose Generalized subtraction

Syntax `gsubtract(a,b)`

Description This function generalizes matrix subtraction to the subtraction of cell arrays of matrices combined in an element-wise fashion.

`gsubtract(a,b)` takes two matrices or cell arrays, and subtracts them in an element-wise manner.

Examples Here matrix and cell array values are added.

```
gsubtract([1 2 3; 4 5 6],[10;20])
gsubtract({1 2; 3 4},{1 3; 5 2})
gsubtract({1 2 3 4},{10;20;30})
```


See Also `gadd` | `gmultiply` | `gdivide` | `gnegate` | `gsqrt`

hardlim

Purpose

Hard-limit transfer function

Graph and Symbol



Hard-Limit Transfer Function

Syntax

$A = \text{hardlim}(N, FP)$

Description

`hardlim` is a neural transfer function. Transfer functions calculate a layer's output from its net input.

$A = \text{hardlim}(N, FP)$ takes N and optional function parameters,

N S-by-Q matrix of net input (column) vectors

FP Struct of function parameters (ignored)

and returns A , the S-by-Q Boolean matrix with 1s where $N \geq 0$.

`info = hardlim('code')` returns information according to the code string specified:

`hardlim('name')` returns the name of this function.

`hardlim('output', FP)` returns the [min max] output range.

`hardlim('active', FP)` returns the [min max] active input range.

`hardlim('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is S-by-S-by-Q or S-by-Q.

`hardlim('fpnames')` returns the names of the function parameters.

`hardlim('fpdefaults')` returns the default function parameters.

Examples

Here is how to create a plot of the `hardlim` transfer function.

```
n = -5:0.1:5;  
a = hardlim(n);  
plot(n,a)
```

Assign this transfer function to layer `i` of a network.

```
net.layers{i}.transferFcn = 'hardlim';
```

Algorithms

$\text{hardlim}(n) = 1$ if $n \geq 0$
0 otherwise


See Also

`sim` | `hardlims`

Purpose

Symmetric hard-limit transfer function

Graph and Symbol



Symmetric Hard-Limit Transfer Function

Syntax

`A = hardlims(N,FP)`

Description

`hardlims` is a neural transfer function. Transfer functions calculate a layer's output from its net input.

`A = hardlims(N,FP)` takes `N` and optional function parameters,

`N` S-by-Q matrix of net input (column) vectors

`FP` Struct of function parameters (ignored)

and returns `A`, the S-by-Q +1/-1 matrix with +1s where $N \geq 0$.

`info = hardlims('code')` returns information according to the code string specified:

`hardlims('name')` returns the name of this function.

`hardlims('output',FP)` returns the [min max] output range.

`hardlims('active',FP)` returns the [min max] active input range.

`hardlims('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is S-by-S-by-Q or S-by-Q.

`hardlims('fpnames')` returns the names of the function parameters.

`hardlims('fpdefaults')` returns the default function parameters.

Examples

Here is how to create a plot of the `hardlims` transfer function.

```
n = -5:0.1:5;  
a = hardlims(n);  
plot(n,a)
```

Assign this transfer function to layer `i` of a network.

```
net.layers{i}.transferFcn = 'hardlims';
```

Algorithms

$\text{hardlims}(n) = 1$ if $n \geq 0$, -1 otherwise.

See Also

`sim` | `hardlim`

hextop

Purpose Hexagonal layer topology function

Syntax `hextop(dim1,dim2,...,dimN)`

Description hextop calculates the neuron positions for layers whose neurons are arranged in an N-dimensional hexagonal pattern.

hextop(dim1,dim2,...,dimN) takes N arguments,

dim_i Length of layer in dimension i

and returns an N-by-S matrix of N coordinate vectors where S is the product of dim₁*dim₂*...*dim_N.

Examples This code creates and displays a two-dimensional layer with 40 neurons arranged in an 8-by-5 hexagonal pattern.

```
pos = hextop(8,5);  
net = selforgmap([8 5], 'topologyFcn', 'hextop');  
plotsomtop(net)
```

See Also `gridtop` | `randtop` | `tritop`

Purpose Convert indices to vectors

Syntax `ind2vec(ind)`

Description `ind2vec` and `vec2ind` allow indices to be represented either by themselves, or as vectors containing a 1 in the row of the index they represent.

`ind2vec(ind)` takes one argument,

`ind` Row vector of indices

and returns a sparse matrix of vectors, with one 1 in each column, as indicated by `ind`.

Examples Here four indices are defined and converted to vector representation.

```
ind = [1 3 2 3]
vec = ind2vec(ind)
```

See Also `vec2ind`

init

Purpose	Initialize neural network
Syntax	<code>net = init(net)</code>
To Get Help	Type <code>help network/init</code> .
Description	<code>net = init(net)</code> returns neural network <code>net</code> with weight and bias values updated according to the network initialization function, indicated by <code>net.initFcn</code> , and the parameter values, indicated by <code>net.initParam</code> .
Examples	<p>Here a perceptron is created, and then configured so that its input, output, weight, and bias dimensions match the input and target data.</p> <pre>x = [0 1 0 1; 0 0 1 1]; t = [0 0 0 1]; net = perceptron; net = configure(net,x,t); net.iw{1,1} net.b{1}</pre> <p>Training the perceptron alters its weight and bias values.</p> <pre>net = train(net,x,t); net.iw{1,1} net.b{1}</pre> <p><code>init</code> reinitializes those weight and bias values.</p> <pre>net = init(net); net.iw{1,1} net.b{1}</pre> <p>The weights and biases are zeros again, which are the initial values used by perceptron networks.</p>

Algorithms

`init` calls `net.initFcn` to initialize the weight and bias values according to the parameter values `net.initParam`.

Typically, `net.initFcn` is set to `'initlay'`, which initializes each layer's weights and biases according to its `net.layers{i}.initFcn`.

Backpropagation networks have `net.layers{i}.initFcn` set to `'initnw'`, which calculates the weight and bias values for layer `i` using the Nguyen-Widrow initialization method.

Other networks have `net.layers{i}.initFcn` set to `'initwb'`, which initializes each weight and bias with its own initialization function. The most common weight and bias initialization function is `rands`, which generates random values between -1 and 1 .

See Also

`sim` | `adapt` | `train` | `initlay` | `initnw` | `initwb` | `rands` | `revert`

Purpose Conscience bias initialization function

Syntax `initcon (S,PR)`

Description `initcon` is a bias initialization function that initializes biases for learning with the `learncon` learning function.

`initcon (S,PR)` takes two arguments,

`S` Number of rows (neurons)

`PR` R-by-2 matrix of `R = [Pmin Pmax]` (default = `[1 1]`)

and returns an `S`-by-1 bias vector.

Note that for biases, `R` is always 1. `initcon` could also be used to initialize weights, but it is not recommended for that purpose.

Examples Here initial bias values are calculated for a five-neuron layer.

```
b = initcon(5)
```

Network Use You can create a standard network that uses `initcon` to initialize weights by calling `competlayer`.

To prepare the bias of layer `i` of a custom network to initialize with `initcon`,

- 1 Set `net.initFcn` to `'initlay'`. (`net.initParam` automatically becomes `initlay`'s default parameters.)
- 2 Set `net.layers{i}.initFcn` to `'initwb'`.
- 3 Set `net.biases{i}.initFcn` to `'initcon'`.

To initialize the network, call `init`.

Algorithms

`learncon` updates biases so that each bias value $b(i)$ is a function of the average output $c(i)$ of the neuron i associated with the bias.

`initcon` gets initial bias values by assuming that each neuron has responded to equal numbers of vectors in the past.

See Also

`competlayer` | `init` | `initlay` | `initwb` | `learncon`

initlay

Purpose Layer-by-layer network initialization function

Syntax
`net = initlay(net)`
`info = initlay('code')`

Description `initlay` is a network initialization function that initializes each layer `i` according to its own initialization function `net.layers{i}.initFcn`.

`net = initlay(net)` takes

<code>net</code>	Neural network
------------------	----------------

and returns the network with each layer updated.

`info = initlay('code')` returns useful information for each supported code string:

<code>'pnames'</code>	Names of initialization parameters
<code>'pdefaults'</code>	Default initialization parameters

`initlay` does not have any initialization parameters.

Network Use

You can create a standard network that uses `initlay` by calling `feedforwardnet`, `cascadeforwardnet`, and many other network functions.

To prepare a custom network to be initialized with `initlay`,

- 1 Set `net.initFcn` to `'initlay'`. This sets `net.initParam` to the empty matrix `[]`, because `initlay` has no initialization parameters.
- 2 Set each `net.layers{i}.initFcn` to a layer initialization function. (Examples of such functions are `initwb` and `initnw`.)

To initialize the network, call `init`.

Algorithms

The weights and biases of each layer `i` are initialized according to `net.layers{i}.initFcn`.

See Also

`cascaforwardnet` | `feedforwardnet` | `init` | `initnw` | `initwb`

initlvq

Purpose LVQ weight initialization function

Syntax

```
initlvq('configure',x)
initlvq('configure',net,'IW',i,j,settings)
initlvq('configure',net,'LW',i,j,settings)
initlvq('configure',net,'b',i,)
```

Description `initlvq('configure',x)` takes input data `x` and returns initialization settings for an LVQ weights associated with that input.

`initlvq('configure',net,'IW',i,j,settings)` takes a network, and indices indicating an input weight to layer `i` from input `j`, and that weights settings, and returns new weight values.

`initlvq('configure',net,'LW',i,j,settings)` takes a network, and indices indicating a layer weight to layer `i` from layer `j`, and that weights settings, and returns new weight values.

`initlvq('configure',net,'b',i,)` takes a network, and an index indicating a bias for layer `i`, and returns new bias values.

See Also `lvqnet` | `init`

Purpose Nguyen-Widrow layer initialization function

Syntax `net = initnw(net,i)`

Description `initnw` is a layer initialization function that initializes a layer's weights and biases according to the Nguyen-Widrow initialization algorithm. This algorithm chooses values in order to distribute the active region of each neuron in the layer approximately evenly across the layer's input space. The values contain a degree of randomness, so they are not the same each time this function is called.

`initnw` requires that the layer it initializes have a transfer function with a finite active input range. This includes transfer functions such as `tansig` and `satlin`, but not `purelin`, whose active input range is the infinite interval $[-\infty, \infty]$. Transfer functions, such as `tansig`, will return their active input range as follows:

```
activeInputRange = tansig('active')
activeInputRange =
    -2     2
```

`net = initnw(net,i)` takes two arguments,

<code>net</code>	Neural network
<code>i</code>	Index of a layer

and returns the network with layer `i`'s weights and biases updated.

There is a random element to Nguyen-Widrow initialization. Unless the default random generator is set to the same seed before each call to `initnw`, it will generate different weight and bias values each time.

Network Use You can create a standard network that uses `initnw` by calling `feedforwardnet` or `cascadeforwardnet`.

To prepare a custom network to be initialized with `initnw`,

- 1 Set `net.initFcn` to `'initlay'`. This sets `net.initParam` to the empty matrix `[]`, because `initlay` has no initialization parameters.
- 2 Set `net.layers{i}.initFcn` to `'initnw'`.

To initialize the network, call `init`.

Algorithms

The Nguyen-Widrow method generates initial weight and bias values for a layer so that the active regions of the layer's neurons are distributed approximately evenly over the input space.

Advantages over purely random weights and biases are

- Few neurons are wasted (because all the neurons are in the input space).
- Training works faster (because each area of the input space has neurons). The Nguyen-Widrow method can only be applied to layers
 - With a bias
 - With weights whose `weightFcn` is `dotprod`
 - With `netInputFcn` set to `netsum`
 - With `transferFcn` whose active region is finite

If these conditions are not met, then `initnw` uses `rand`s to initialize the layer's weights and biases.

See Also

`cascadeforwardnet` | `feedforwardnet` | `init` | `initlay` | `initwb`

Purpose

Initialize SOM weights with principal components

Syntax

```
weights = initsom(inputs,dimensions,positions)
weights = initsom(inputs,dimensions,topologyFcn)
```

Description

`initsompc` initializes the weights of an N-dimensional self-organizing map so that the initial weights are distributed across the space spanned by the most significant N principal components of the inputs. Distributing the weight significantly speeds up SOM learning, as the map starts out with a reasonable ordering of the input space.

`weights = initsom(inputs,dimensions,positions)` takes these arguments:

<code>inputs</code>	R-by-Q matrix of Q R-element input vectors
<code>dimensions</code>	D-by-1 vector of positive integer SOM dimensions
<code>positions</code>	D-by-S matrix of S D-dimension neuron positions

and returns the following:

<code>weights</code>	S-by-R matrix of weights
----------------------	--------------------------

`weights = initsom(inputs,dimensions,topologyFcn)` is an alternative specifying the name of a layer topology function instead of `positions`. `topologyFcn` is called with `dimensions` to obtain `positions`.

Examples

```
inputs = rand(2,100)+[2;3]*ones(1,100);
dimensions = [3 4];
positions = gridtop(dimensions);
weights = initsompc(inputs,dimensions,positions);
```

See Also

`gridtop` | `hextop` | `randtop`

initwb

Purpose By weight and bias layer initialization function

Syntax `initwb(net,i)`

Description `initwb` is a layer initialization function that initializes a layer's weights and biases according to their own initialization functions.

`initwb(net,i)` takes two arguments,

<code>net</code>	Neural network
<code>i</code>	Index of a layer

and returns the network with layer `i`'s weights and biases updated.

Network Use You can create a standard network that uses `initwb` by calling `perceptron` or `linearlayer`.

To prepare a custom network to be initialized with `initwb`,

- 1 Set `net.initFcn` to `'initlay'`. This sets `net.initParam` to the empty matrix `[]`, because `initlay` has no initialization parameters.
- 2 Set `net.layers{i}.initFcn` to `'initwb'`.
- 3 Set each `net.inputWeights{i,j}.initFcn` to a weight initialization function. Set each `net.layerWeights{i,j}.initFcn` to a weight initialization function. Set each `net.biases{i}.initFcn` to a bias initialization function. (Examples of such functions are `rands` and `midpoint`.)

To initialize the network, call `init`.

Algorithms Each weight (bias) in layer `i` is set to new values calculated according to its weight (bias) initialization function.

See Also `init` | `initlay` | `initnw` | `linearlayer` | `perceptron`

Purpose Zero weight and bias initialization function

Syntax
`W = initzero(S,PR)`
`b = initzero(S,[1 1])`

Description `W = initzero(S,PR)` takes two arguments,

<code>S</code>	Number of rows (neurons)
<code>PR</code>	R-by-2 matrix of input value ranges = [Pmin Pmax]

and returns an S-by-R weight matrix of zeros.

`b = initzero(S,[1 1])` returns an S-by-1 bias vector of zeros.

Examples Here initial weights and biases are calculated for a layer with two inputs ranging over [0 1] and [-2 2] and four neurons.

```
W = initzero(5,[0 1; -2 2])
b = initzero(5,[1 1])
```

Network Use You can create a standard network that uses `initzero` to initialize its weights by calling `newp` or `newlin`.

To prepare the weights and the bias of layer `i` of a custom network to be initialized with `midpoint`,

- 1** Set `net.initFcn` to 'initlay'. (`net.initParam` automatically becomes `initlay`'s default parameters.)
- 2** Set `net.layers{i}.initFcn` to 'initwb'.
- 3** Set each `net.inputWeights{i,j}.initFcn` to 'initzero'.
- 4** Set each `net.layerWeights{i,j}.initFcn` to 'initzero'.
- 5** Set each `net.biases{i}.initFcn` to 'initzero'.

initzero

To initialize the network, call `init`.

See `help newp` and `help newlin` for initialization examples.

See Also

`initwb` | `initlay` | `init`

Purpose Indicate if network inputs and outputs are configured

Syntax `[flag,inputflags,outputflags] = isconfigured(net)`

Description `[flag,inputflags,outputflags] = isconfigured(net)` takes a neural network and returns three values,

<code>flag</code>	True if all network inputs and outputs are configured (have non-zero sizes)
<code>inputflags</code>	Vector of true/false values for each configured/unconfigured input
<code>outputflags</code>	Vector of true/false values for each configured/unconfigured output

Examples Here are the flags returned for a new network before and after being configured:

```
net = feedforwardnet;  
[flag,inputFlags,outputFlags] = isconfigured(net)  
[x,t] = simplefit_dataset;  
net = configure(net,x,t);  
[flag,inputFlags,outputFlags] = isconfigured(net)
```

See Also `configure` | `unconfigure`

layrecnet

Purpose Layer recurrent neural network

Syntax `layrecnet(layerDelays,hiddenSizes,trainFcn)`

Description Layer recurrent neural networks are similar to feedforward networks, except that each layer has a recurrent connection with a tap delay associated with it. This allows the network to have an infinite dynamic response to time series input data. This network is similar to the time delay (`timedelaynet`) and distributed delay (`distdelaynet`) neural networks, which have finite input responses.

`layrecnet(layerDelays,hiddenSizes,trainFcn)` takes these arguments,

<code>layerDelays</code>	Row vector of increasing 0 or positive delays (default = 1:2)
<code>hiddenSizes</code>	Row vector of one or more hidden layer sizes (default = 10)
<code>trainFcn</code>	Training function (default = 'trainlm')

and returns a layer recurrent neural network.

Examples Use a layer recurrent neural network to solve a simple time series problem:

```
[X,T] = simpleseries_dataset;  
net = layrecnet(1:2,10)  
[Xs,Xi,Ai,Ts] = preparets(net,X,T)  
net = train(net,Xs,Ts,Xi,Ai);  
view(net)  
Y = net(Xs,Xi,Ai);  
perf = perform(net,Y,Ts)
```

See Also `preparets` | `removedelay` | `distdelaynet` | `timedelaynet` | `narnet` | `narxnet`

Purpose Conscience bias learning function

Syntax `[dB,LS] = learncon(B,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learncon('code')`

Description learncon is the conscience bias learning function used to increase the net input to neurons that have the lowest average output until each neuron responds approximately an equal percentage of the time.

`[dB,LS] = learncon(B,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

B	S-by-1 bias vector
P	1-by-Q ones vector
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dB	S-by-1 weight (or bias) change matrix
LS	New learning state

Learning occurs according to `learncon`'s learning parameter, shown here with its default value.

`LP.lr` - 0.001 Learning rate

`info = learncon('code')` returns useful information for each supported *code* string:

'pnames'	Names of learning parameters
'pdefaults'	Default learning parameters
'needg'	Returns 1 if this function uses <code>gW</code> or <code>gA</code>

Neural Network Toolbox 2.0 compatibility: The `LP.lr` described above equals 1 minus the bias time constant used by `trainc` in the Neural Network Toolbox 2.0 software.

Examples

Here you define a random output `A` and bias vector `W` for a layer with three neurons. You also define the learning rate `LR`.

```
a = rand(3,1);  
b = rand(3,1);  
lp.lr = 0.5;
```

Because `learncon` only needs these values to calculate a bias change (see “Algorithm” below), use them to do so.

```
dW = learncon(b,[],[],[],a,[],[],[],[],[],lp,[])
```

Network Use

To prepare the bias of layer `i` of a custom network to learn with `learncon`,

- 1 Set `net.trainFcn` to `'trainr'`. (`net.trainParam` automatically becomes `trainr`'s default parameters.)

- 2 Set `net.adaptFcn` to `'trains'`. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3 Set `net.inputWeights{i}.learnFcn` to `'learncon'`
- 4 Set each `net.layerWeights{i,j}.learnFcn` to `'learncon'`.
(Each weight learning parameter property is automatically set to `learncon`'s default parameters.)

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (or `net.adaptParam`) properties as desired.
- 2 Call `train` (or `adapt`).

Algorithms

`learncon` calculates the bias change `db` for a given neuron by first updating each neuron's *conscience*, i.e., the running average of its output:

$$c = (1-lr)*c + lr*a$$

The *conscience* is then used to compute a bias for the neuron that is greatest for smaller *conscience* values.

$$b = \exp(1-\log(c)) - b$$

(`learncon` recovers `C` from the bias values each time it is called.)

See Also

`learnk` | `learnos` | `adapt` | `train`

learngd

Purpose Gradient descent weight and bias learning function

Syntax `[dW,LS] = learngd(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learngd('code')`

Description `learngd` is the gradient descent weight and bias learning function.
`[dW,LS] = learngd(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs:

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or <code>ones(1,Q)</code>)
Z	S-by-Q output gradient with respect to performance x Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, <code>LP = []</code>
LS	Learning state, initially should be <code>[]</code>

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

learngd

learning parameter property is automatically set to `learngd`'s default parameters.

To allow the network to adapt,

- 1 Set `net.adaptParam` properties to desired values.
- 2 Call `adapt` with the network.

See `help newff` or `help newcf` for examples.

Algorithms

`learngd` calculates the weight change dW for a given neuron from the neuron's input P and error E , and the weight (or bias) learning rate LR , according to the gradient descent $dw = lr * gW$.

See Also

`adapt` | `learngdm` | `train`

Purpose Gradient descent with momentum weight and bias learning function

Syntax `[dW,LS] = learngdm(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learngdm('code')`

Description `learngdm` is the gradient descent with momentum weight and bias learning function.

`[dW,LS] = learngdm(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

learngdm

Learning occurs according to `learngdm`'s learning parameters, shown here with their default values.

<code>LP.lr</code>	<code>- 0.01</code>	Learning rate
<code>LP.mc</code>	<code>- 0.9</code>	Momentum constant

`info = learngdm('code')` returns useful information for each *code* string:

<code>'pnames'</code>	Names of learning parameters
<code>'pdefaults'</code>	Default learning parameters
<code>'needg'</code>	Returns 1 if this function uses <code>gW</code> or <code>gA</code>

Examples

Here you define a random gradient `G` for a weight going to a layer with three neurons from an input with two elements. Also define a learning rate of 0.5 and momentum constant of 0.8:

```
gW = rand(3,2);  
lp.lr = 0.5;  
lp.mc = 0.8;
```

Because `learngdm` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so. Use the default initial learning state.

```
ls = [];  
[dW,ls] = learngdm([],[],[],[],[],[],[],gW,[],[],lp,ls)
```

`learngdm` returns the weight change and a new learning state.

Network Use

You can create a standard network that uses `learnngdm` with `newff`, `newcf`, or `newelm`.

To prepare the weights and the bias of layer `i` of a custom network to adapt with `learnngdm`,

- 1 Set `net.adaptFcn` to `'trains'`. `net.adaptParam` automatically becomes `trains`'s default parameters.
- 2 Set each `net.inputWeights{i,j}.learnFcn` to `'learnngdm'`. Set each `net.layerWeights{i,j}.learnFcn` to `'learnngdm'`. Set `net.biases{i}.learnFcn` to `'learnngdm'`. Each weight and bias learning parameter property is automatically set to `learnngdm`'s default parameters.

To allow the network to adapt,

- 1 Set `net.adaptParam` properties to desired values.
- 2 Call `adapt` with the network.

See `help newff` or `help newcf` for examples.

Algorithms

`learnngdm` calculates the weight change `dW` for a given neuron from the neuron's input `P` and error `E`, the weight (or bias) `W`, learning rate `LR`, and momentum constant `MC`, according to gradient descent with momentum:

$$dW = mc*dWprev + (1-mc)*lr*gW$$

The previous weight change `dWprev` is stored and read from the learning state `LS`.

See Also

`adapt` | `learnngd` | `train`

learnh

Purpose Hebb weight learning rule

Syntax `[dW,LS] = learnh(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learnh('code')`

Description learnh is the Hebb weight learning function.

`[dW,LS] = learnh(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to learnh's learning parameter, shown here with its default value.

LP.lr - 0.01 Learning rate

`info = learnh('code')` returns useful information for each code string:

'pnames'	Names of learning parameters
'pdefaults'	Default learning parameters
'needg'	Returns 1 if this function uses gW or gA

Examples

Here you define a random input P and output A for a layer with a two-element input and three neurons. Also define the learning rate LR.

```
p = rand(2,1);
a = rand(3,1);
lp.lr = 0.5;
```

Because `learnh` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnh([],p,[],[],a,[],[],[],[],[],lp,[])
```

Network Use

To prepare the weights and the bias of layer *i* of a custom network to learn with `learnh`,

- 1 Set `net.trainFcn` to 'trainr'. (`net.trainParam` automatically becomes `trainr`'s default parameters.)
- 2 Set `net.adaptFcn` to 'trains'. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3 Set each `net.inputWeights{i,j}.learnFcn` to 'learnh'.

- 4 Set each `net.layerWeights{i,j}.learnFcn` to 'learnh'. (Each weight learning parameter property is automatically set to learnh's default parameters.)

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (or `net.adaptParam`) properties to desired values.
- 2 Call `train` (adapt).

Algorithms

learnh calculates the weight change dW for a given neuron from the neuron's input P , output A , and learning rate LR according to the Hebb learning rule:

$$dw = lr * a * p'$$

References

Hebb, D.O., *The Organization of Behavior*, New York, Wiley, 1949

See Also

learnhd | adapt | train

Purpose

Hebb with decay weight learning rule

Syntax

```
[dW,LS] = learnhd(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)
info = learnhd('code')
```

Description

learnhd is the Hebb weight learning function.

[dW,LS] = learnhd(W,P,Z,N,A,T,E,gW,gA,D,LP,LS) takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to learnhd's learning parameters, shown here with default values.

learnhd

LP.dr - 0.01 Decay rate
LP.lr - 0.1 Learning rate

`info = learnhd('code')` returns useful information for each *code* string:

'pnames' Names of learning parameters
'pdefaults' Default learning parameters
'needg' Returns 1 if this function uses gW or gA

Examples

Here you define a random input P, output A, and weights W for a layer with a two-element input and three neurons. Also define the decay and learning rates.

```
p = rand(2,1);  
a = rand(3,1);  
w = rand(3,2);  
lp.dr = 0.05;  
lp.lr = 0.5;
```

Because `learnhd` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnhd(w,p,[],[],a,[],[],[],[],[],lp,[])
```

Network Use

To prepare the weights and the bias of layer *i* of a custom network to learn with `learnhd`,

- 1 Set `net.trainFcn` to 'trainr'. (`net.trainParam` automatically becomes `trainr`'s default parameters.)
- 2 Set `net.adaptFcn` to 'trains'. (`net.adaptParam` automatically becomes `trains`'s default parameters.)

- 3 Set each `net.inputWeights{i,j}.learnFcn` to 'learnhd'.
- 4 Set each `net.layerWeights{i,j}.learnFcn` to 'learnhd'. (Each weight learning parameter property is automatically set to learnhd's default parameters.)

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (or `net.adaptParam`) properties to desired values.
- 2 Call `train` (`adapt`).

Algorithms

learnhd calculates the weight change Δw for a given neuron from the neuron's input P , output A , decay rate DR , and learning rate LR according to the Hebb with decay learning rule:

$$\Delta w = lr * a * p' - dr * w$$

See Also

`learnh` | `adapt` | `train`

learnis

Purpose Instar weight learning function

Syntax `[dW,LS] = learnis(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learnis('code')`

Description `learnis` is the instar weight learning function.

`[dW,LS] = learnis(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or <code>ones(1,Q)</code>)
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, <code>LP = []</code>
LS	Learning state, initially should be = <code>[]</code>

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to `learnis`'s learning parameter, shown here with its default value.

LP.lr - 0.01 Learning rate

`info = learnis('code')` returns useful information for each *code* string:

'pnames'	Names of learning parameters
'pdefaults'	Default learning parameters
'needg'	Returns 1 if this function uses gW or gA

Examples

Here you define a random input P, output A, and weight matrix W for a layer with a two-element input and three neurons. Also define the learning rate LR.

```
p = rand(2,1);
a = rand(3,1);
w = rand(3,2);
lp.lr = 0.5;
```

Because `learnis` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnis(w,p,[],[],a,[],[],[],[],[],lp,[])
```

Network Use

To prepare the weights and the bias of layer *i* of a custom network so that it can learn with `learnis`,

- 1 Set `net.trainFcn` to 'trainr'. (`net.trainParam` automatically becomes `trainr`'s default parameters.)
- 2 Set `net.adaptFcn` to 'trains'. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3 Set each `net.inputWeights{i,j}.learnFcn` to 'learnis'.

learnis

4 Set each `net.layerWeights{i,j}.learnFcn` to 'learnis'. (Each weight learning parameter property is automatically set to learnis's default parameters.)

To train the network (or enable it to adapt),

1 Set `net.trainParam` (`net.adaptParam`) properties to desired values.

2 Call `train` (`adapt`).

Algorithms

learnis calculates the weight change dW for a given neuron from the neuron's input P , output A , and learning rate LR according to the instar learning rule:

$$dw = lr * a * (p' - w)$$

References

Grossberg, S., *Studies of the Mind and Brain*, Dordrecht, Holland, Reidel Press, 1982

See Also

learnk | learnos | adapt | train

Purpose

Kohonen weight learning function

Syntax

```
[dW,LS] = learnk(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)
info = learnk('code')
```

Description

learnk is the Kohonen weight learning function.

[dW,LS] = learnk(W,P,Z,N,A,T,E,gW,gA,D,LP,LS) takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to learnk's learning parameter, shown here with its default value.

LP.lr - 0.01 Learning rate

`info = learnk('code')` returns useful information for each *code* string:

'pnames'	Names of learning parameters
'pdefaults'	Default learning parameters
'needg'	Returns 1 if this function uses gW or gA

Examples

Here you define a random input P, output A, and weight matrix W for a layer with a two-element input and three neurons. Also define the learning rate LR.

```
p = rand(2,1);  
a = rand(3,1);  
w = rand(3,2);  
lp.lr = 0.5;
```

Because `learnk` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnk(w,p,[],[],a,[],[],[],[],[],lp,[])
```

Network Use

To prepare the weights of layer *i* of a custom network to learn with `learnk`,

- 1 Set `net.trainFcn` to 'trainr'. (`net.trainParam` automatically becomes `trainr`'s default parameters.)
- 2 Set `net.adaptFcn` to 'trains'. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3 Set each `net.inputWeights{i,j}.learnFcn` to 'learnk'.

- 4 Set each `net.layerWeights{i,j}.learnFcn` to 'learnk'. (Each weight learning parameter property is automatically set to learnk's default parameters.)

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (or `net.adaptParam`) properties as desired.
- 2 Call `train` (or `adapt`).

Algorithms

learnk calculates the weight change dW for a given neuron from the neuron's input P , output A , and learning rate LR according to the Kohonen learning rule:

$$dw = lr * (p' - w), \text{ if } a \neq 0; = 0, \text{ otherwise}$$

References

Kohonen, T., *Self-Organizing and Associative Memory*, New York, Springer-Verlag, 1984

See Also

learnis | learnos | adapt | train

learnlv1

Purpose LVQ1 weight learning function

Syntax `[dW,LS] = learnlv1(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learnlv1('code')`

Description learnlv1 is the LVQ1 weight learning function.

`[dW,LS] = learnlv1(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to learnlv1's learning parameter, shown here with its default value.

`LP.lr = 0.01` Learning rate

`info = learnlv1('code')` returns useful information for each *code* string:

<code>'pnames'</code>	Names of learning parameters
<code>'pdefaults'</code>	Default learning parameters
<code>'needg'</code>	Returns 1 if this function uses <code>gW</code> or <code>gA</code>

Examples

Here you define a random input `P`, output `A`, weight matrix `W`, and output gradient `gA` for a layer with a two-element input and three neurons. Also define the learning rate `LR`.

```
p = rand(2,1);
w = rand(3,2);
a = compet(negdist(w,p));
gA = [-1;1; 1];
lp.lr = 0.5;
```

Because `learnlv1` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnlv1(w,p,[],[],a,[],[],[],gA,[],lp,[])
```

Network Use

You can create a standard network that uses `learnlv1` with `lvqnet`. To prepare the weights of layer `i` of a custom network to learn with `learnlv1`,

- 1 Set `net.trainFcn` to `'trainr'`. (`net.trainParam` automatically becomes `trainr`'s default parameters.)
- 2 Set `net.adaptFcn` to `'trains'`. (`net.adaptParam` automatically becomes `trains`'s default parameters.)

learnlv1

- 3 Set each `net.inputWeights{i,j}.learnFcn` to `'learnlv1'`.
- 4 Set each `net.layerWeights{i,j}.learnFcn` to `'learnlv1'`.
(Each weight learning parameter property is automatically set to `learnlv1`'s default parameters.)

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (or `net.adaptParam`) properties as desired.
- 2 Call `train` (or `adapt`).

Algorithms

`learnlv1` calculates the weight change dW for a given neuron from the neuron's input P , output A , output gradient gA , and learning rate LR , according to the LVQ1 rule, given i , the index of the neuron whose output $a(i)$ is 1:

$$dw(i,:) = +lr*(p-w(i,:)) \text{ if } gA(i) = 0; = -lr*(p-w(i,:)) \text{ if } gA(i) = -1$$

See Also

`learnlv2` | `adapt` | `train`

Purpose LVQ2.1 weight learning function

Syntax `[dW,LS] = learnlv2(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learnlv2('code')`

Description learnlv2 is the LVQ2 weight learning function.

`[dW,LS] = learnlv2(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R weight gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to learnlv2's learning parameter, shown here with its default value.

learnlv2

LP.lr - 0.01 Learning rate
LP.window - 0.25 Window size (0 to 1, typically 0.2 to 0.3)

`info = learnlv2('code')` returns useful information for each *code* string:

'pnames' Names of learning parameters
'pdefaults' Default learning parameters
'needg' Returns 1 if this function uses gW or gA

Examples

Here you define a sample input P, output A, weight matrix W, and output gradient gA for a layer with a two-element input and three neurons. Also define the learning rate LR.

```
p = rand(2,1);  
w = rand(3,2);  
n = negdist(w,p);  
a = compet(n);  
gA = [-1;1; 1];  
lp.lr = 0.5;
```

Because `learnlv2` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnlv2(w,p,[],n,a,[],[],[],gA,[],lp,[])
```

Network Use

You can create a standard network that uses `learnlv2` with `lvqnet`.

To prepare the weights of layer *i* of a custom network to learn with `learnlv2`,

- 1 Set `net.trainFcn` to 'trainr'. (`net.trainParam` automatically becomes `trainr`'s default parameters.)

- 2 Set `net.adaptFcn` to `'trains'`. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3 Set each `net.inputWeights{i,j}.learnFcn` to `'learnlv2'`.
- 4 Set each `net.layerWeights{i,j}.learnFcn` to `'learnlv2'`. (Each weight learning parameter property is automatically set to `learnlv2`'s default parameters.)

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (or `net.adaptParam`) properties as desired.
- 2 Call `train` (or `adapt`).

Algorithms

`learnlv2` implements Learning Vector Quantization 2.1, which works as follows:

For each presentation, if the winning neuron `i` should not have won, and the runnerup `j` should have, and the distance `di` between the winning neuron and the input `p` is roughly equal to the distance `dj` from the runnerup neuron to the input `p` according to the given window,

$$\min(di/dj, dj/di) > (1-\text{window})/(1+\text{window})$$

then move the winning neuron `i` weights away from the input vector, and move the runnerup neuron `j` weights toward the input according to

$$\begin{aligned} dw(i,:) &= -lp.lr*(p'-w(i,:)) \\ dw(j,:) &= +lp.lr*(p'-w(j,:)) \end{aligned}$$

See Also

`learnlv1` | `adapt` | `train`

learnos

Purpose Outstar weight learning function

Syntax `[dW,LS] = learnos(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learnos('code')`

Description `learnos` is the outstar weight learning function.

`[dW,LS] = learnos(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or <code>ones(1,Q)</code>)
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R weight gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, <code>LP = []</code>
LS	Learning state, initially should be <code>= []</code>

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to `learnos`'s learning parameter, shown here with its default value.

LP.lr - 0.01 Learning rate

`info = learnos('code')` returns useful information for each *code* string:

'pnames'	Names of learning parameters
'pdefaults'	Default learning parameters
'needg'	Returns 1 if this function uses <i>gW</i> or <i>gA</i>

Examples

Here you define a random input *P*, output *A*, and weight matrix *W* for a layer with a two-element input and three neurons. Also define the learning rate *LR*.

```
p = rand(2,1);
a = rand(3,1);
w = rand(3,2);
lp.lr = 0.5;
```

Because `learnos` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnos(w,p,[],[],a,[],[],[],[],[],lp,[])
```

Network Use

To prepare the weights and the bias of layer *i* of a custom network to learn with `learnos`,

- 1 Set `net.trainFcn` to 'trainr'. (`net.trainParam` automatically becomes `trainr`'s default parameters.)
- 2 Set `net.adaptFcn` to 'trains'. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3 Set each `net.inputWeights{i,j}.learnFcn` to 'learnos'.

learnos

4 Set each `net.layerWeights{i,j}.learnFcn` to 'learnos'. (Each weight learning parameter property is automatically set to learnos's default parameters.)

To train the network (or enable it to adapt),

1 Set `net.trainParam` (or `net.adaptParam`) properties to desired values.

2 Call `train` (`adapt`).

Algorithms

learnos calculates the weight change dW for a given neuron from the neuron's input P , output A , and learning rate LR according to the outstar learning rule:

$$dw = lr * (a - w) * p'$$

References

Grossberg, S., *Studies of the Mind and Brain*, Dordrecht, Holland, Reidel Press, 1982

See Also

learnis | learnk | adapt | train

Purpose

Perceptron weight and bias learning function

Syntax

```
[dW,LS] = learnp(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)
info = learnp('code')
```

Description

learnp is the perceptron weight/bias learning function.

[dW,LS] = learnp(W,P,Z,N,A,T,E,gW,gA,D,LP,LS) takes several inputs,

W	S-by-R weight matrix (or b, and S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R weight gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

info = learnp('code') returns useful information for each *code* string:

'pnames'	Names of learning parameters
'pdefaults'	Default learning parameters
'needg'	Returns 1 if this function uses gW or gA

Examples

Here you define a random input P and error E for a layer with a two-element input and three neurons.

```
p = rand(2,1);  
e = rand(3,1);
```

Because `learnp` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnp([],p,[],[],[],[],e,[],[],[],[],[])
```

Network Use

You can create a standard network that uses `learnp` with `newp`.

To prepare the weights and the bias of layer *i* of a custom network to learn with `learnp`,

- 1** Set `net.trainFcn` to 'trainb'. (`net.trainParam` automatically becomes `trainb`'s default parameters.)
- 2** Set `net.adaptFcn` to 'trains'. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3** Set each `net.inputWeights{i,j}.learnFcn` to 'learnp'.
- 4** Set each `net.layerWeights{i,j}.learnFcn` to 'learnp'.
- 5** Set `net.biases{i}.learnFcn` to 'learnp'. (Each weight and bias learning parameter property automatically becomes the empty matrix, because `learnp` has no learning parameters.)

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (or `net.adaptParam`) properties to desired values.

- 2 Call `train` (`adapt`).

See `help newp` for adaption and training examples.

Algorithms

`learnp` calculates the weight change dW for a given neuron from the neuron's input P and error E according to the perceptron learning rule:

$$\begin{aligned} dw &= 0, \text{ if } e = 0 \\ &= p', \text{ if } e = 1 \\ &= -p', \text{ if } e = -1 \end{aligned}$$

This can be summarized as

$$dw = e * p'$$

References

Rosenblatt, F., *Principles of Neurodynamics*, Washington, D.C., Spartan Press, 1961

See Also

`adapt` | `learnpn` | `train`

learnpn

Purpose Normalized perceptron weight and bias learning function

Syntax `[dW,LS] = learnpn(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learnpn('code')`

Description `learnpn` is a weight and bias learning function. It can result in faster learning than `learnp` when input vectors have widely varying magnitudes.

`[dW,LS] = learnpn(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones (1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R weight gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

`info = learnpn('code')` returns useful information for each *code* string:

'pnames'	Names of learning parameters
'pdefaults'	Default learning parameters
'needg'	Returns 1 if this function uses <i>gW</i> or <i>gA</i>

Examples

Here you define a random input *P* and error *E* for a layer with a two-element input and three neurons.

```
p = rand(2,1);
e = rand(3,1);
```

Because `learnpn` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnpn([],p,[],[],[],[],e,[],[],[],[],[])
```

Network Use

You can create a standard network that uses `learnpn` with `newp`.

To prepare the weights and the bias of layer *i* of a custom network to learn with `learnpn`,

- 1 Set `net.trainFcn` to 'trainb'. (`net.trainParam` automatically becomes `trainb`'s default parameters.)
- 2 Set `net.adaptFcn` to 'trains'. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3 Set each `net.inputWeights{i,j}.learnFcn` to 'learnpn'.
- 4 Set each `net.layerWeights{i,j}.learnFcn` to 'learnpn'.
- 5 Set `net.biases{i}.learnFcn` to 'learnpn'. (Each weight and bias learning parameter property automatically becomes the empty matrix, because `learnpn` has no learning parameters.)

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (or `net.adaptParam`) properties to desired values.
- 2 Call `train` (`adapt`).

See `help newp` for adaption and training examples.

Algorithms

`learnpn` calculates the weight change dW for a given neuron from the neuron's input P and error E according to the normalized perceptron learning rule:

$$\begin{aligned}pn &= p / \sqrt{1 + p(1)^2 + p(2)^2 + \dots + p(R)^2} \\dw &= 0, \quad \text{if } e = 0 \\&= pn', \quad \text{if } e = 1 \\&= -pn', \quad \text{if } e = -1\end{aligned}$$

The expression for dW can be summarized as

$$dw = e * pn'$$

Limitations

Perceptrons do have one real limitation. The set of input vectors must be linearly separable if a solution is to be found. That is, if the input vectors with targets of 1 cannot be separated by a line or hyperplane from the input vectors associated with values of 0, the perceptron will never be able to classify them correctly.

See Also

`adapt` | `learnp` | `train`

Purpose Self-organizing map weight learning function

Syntax `[dW,LS] = learnsom(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learnsom('code')`

Description `learnsom` is the self-organizing map weight learning function.
`[dW,LS] = learnsom(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R weight gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to `learnsom`'s learning parameters, shown here with their default values.

LP.order_lr	0.9	Ordering phase learning rate
LP.order_steps	1000	Ordering phase steps
LP.tune_lr	0.02	Tuning phase learning rate
LP.tune_nd	1	Tuning phase neighborhood distance

`info = learnsom('code')` returns useful information for each *code* string:

'pnames'	Names of learning parameters
'pdefaults'	Default learning parameters
'needg'	Returns 1 if this function uses gW or gA

Examples

Here you define a random input P, output A, and weight matrix W for a layer with a two-element input and six neurons. You also calculate positions and distances for the neurons, which are arranged in a 2-by-3 hexagonal pattern. Then you define the four learning parameters.

```
p = rand(2,1);
a = rand(6,1);
w = rand(6,2);
pos = hextop(2,3);
d = linkdist(pos);
lp.order_lr = 0.9;
lp.order_steps = 1000;
lp.tune_lr = 0.02;
lp.tune_nd = 1;
```

Because `learnsom` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
ls = [];
```

```
[dW,ls] = learnsom(w,p,[],[],a,[],[],[],[],d,lp,ls)
```

Network Use

You can create a standard network that uses learnsom with newsom.

- 1** Set `net.trainFcn` to 'trainr'. (`net.trainParam` automatically becomes `trainr`'s default parameters.)
- 2** Set `net.adaptFcn` to 'trains'. (`net.adaptParam` automatically becomes `trains`'s default parameters.)
- 3** Set each `net.inputWeights{i,j}.learnFcn` to 'learnsom'.
- 4** Set each `net.layerWeights{i,j}.learnFcn` to 'learnsom'.
- 5** Set `net.biases{i}.learnFcn` to 'learnsom'. (Each weight learning parameter property is automatically set to learnsom's default parameters.)

To train the network (or enable it to adapt):

- 1** Set `net.trainParam` (or `net.adaptParam`) properties to desired values.
- 2** Call `train` (`adapt`).

Algorithms

`learnsom` calculates the weight change dW for a given neuron from the neuron's input P , activation $A2$, and learning rate LR :

$$dw = lr * a2 * (p' - w)$$

where the activation $A2$ is found from the layer output A , neuron distances D , and the current neighborhood size ND :

$$a2(i,q) = \begin{cases} 1, & \text{if } a(i,q) = 1 \\ 0.5, & \text{if } a(j,q) = 1 \text{ and } D(i,j) \leq nd \\ 0, & \text{otherwise} \end{cases}$$

The learning rate LR and neighborhood size NS are altered through two phases: an ordering phase and a tuning phase.

The ordering phase lasts as many steps as `LP.order_steps`. During this phase LR is adjusted from `LP.order_lr` down to `LP.tune_lr`, and ND is adjusted from the maximum neuron distance down to 1. It is during this phase that neuron weights are expected to order themselves in the input space consistent with the associated neuron positions.

During the tuning phase LR decreases slowly from `LP.tune_lr`, and ND is always set to `LP.tune_nd`. During this phase the weights are expected to spread out relatively evenly over the input space while retaining their topological order, determined during the ordering phase.

See Also

`adapt` | `train`

Purpose

Batch self-organizing map weight learning function

Syntax

```
[dW,LS] = learnsomb(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)
info = learnsomb('code')
```

Description

learnsomb is the batch self-organizing map weight learning function.

[dW,LS] = learnsomb(W,P,Z,N,A,T,E,gW,gA,D,LP,LS) takes several inputs:

W	S-by-R weight matrix (or S-by-1 bias vector)
P	R-by-Q input vectors (or ones(1,Q))
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, LP = []
LS	Learning state, initially should be = []

and returns the following:

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to learnsomb's learning parameter, shown here with its default value:

learnsomb

<code>LP.init_neighborhood</code>	3	Initial neighborhood size
<code>LP.steps</code>	100	Ordering phase steps

`info = learnsomb('code')` returns useful information for each *code* string:

<code>'pnames'</code>	Returns names of learning parameters.
<code>'pdefaults'</code>	Returns default learning parameters.
<code>'needg'</code>	Returns 1 if this function uses <code>gW</code> or <code>gA</code> .

Examples

This example defines a random input *P*, output *A*, and weight matrix *W* for a layer with a 2-element input and 6 neurons. This example also calculates the positions and distances for the neurons, which appear in a 2-by-3 hexagonal pattern.

```
p = rand(2,1);
a = rand(6,1);
w = rand(6,2);
pos = hextop(2,3);
d = linkdist(pos);
lp = learnsomb('pdefaults');
```

Because `learnsomb` only needs these values to calculate a weight change (see Algorithm).

```
ls = [];
[dW,ls] = learnsomb(w,p,[],[],a,[],[],[],[],d,lp,ls)
```

Network Use

You can create a standard network that uses `learnsomb` with `selforgmap`. To prepare the weights of layer *i* of a custom network to learn with `learnsomb`:

- 1** Set `NET.trainFcn` to `'trainr'`. (`NET.trainParam` automatically becomes `trainr`'s default parameters.)
- 2** Set `NET.adaptFcn` to `'trains'`. (`NET.adaptParam` automatically becomes `trains`'s default parameters.)
- 3** Set each `NET.inputWeights{i,j}.learnFcn` to `'learnsomb'`.
- 4** Set each `NET.layerWeights{i,j}.learnFcn` to `'learnsomb'`. (Each weight learning parameter property is automatically set to `learnsomb`'s default parameters.)

To train the network (or enable it to adapt):

- 1** Set `NET.trainParam` (or `NET.adaptParam`) properties as desired.
- 2** Call `train` (or `adapt`).

Algorithms

`learnsomb` calculates the weight changes so that each neuron's new weight vector is the weighted average of the input vectors that the neuron and neurons in its neighborhood responded to with an output of 1.

The ordering phase lasts as many steps as `LP.steps`.

During this phase, the neighborhood is gradually reduced from a maximum size of `LP.init_neighborhood` down to 1, where it remains from then on.

See Also

`adapt` | `selforgmap` | `train`

learnwh

Purpose Widrow-Hoff weight/bias learning function

Syntax `[dW,LS] = learnwh(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)`
`info = learnwh('code')`

Description `learnwh` is the Widrow-Hoff weight/bias learning function, and is also known as the delta or least mean squared (LMS) rule.

`[dW,LS] = learnwh(W,P,Z,N,A,T,E,gW,gA,D,LP,LS)` takes several inputs,

W	S-by-R weight matrix (or b, and S-by-1 bias vector)
P	R-by-Q input vectors (or <code>ones(1,Q)</code>)
Z	S-by-Q weighted input vectors
N	S-by-Q net input vectors
A	S-by-Q output vectors
T	S-by-Q layer target vectors
E	S-by-Q layer error vectors
gW	S-by-R weight gradient with respect to performance
gA	S-by-Q output gradient with respect to performance
D	S-by-S neuron distances
LP	Learning parameters, none, <code>LP = []</code>
LS	Learning state, initially should be = <code>[]</code>

and returns

dW	S-by-R weight (or bias) change matrix
LS	New learning state

Learning occurs according to `learnwh`'s learning parameter, shown here with its default value.

```
LP.lr      Learning rate
0.01
```

`info = learnwh('code')` returns useful information for each *code* string:

```
'pnames'      Names of learning parameters
'pdefaults'   Default learning parameters
'needg'       Returns 1 if this function uses gW or gA
```

Examples

Here you define a random input *P* and error *E* for a layer with a two-element input and three neurons. You also define the learning rate *LR* learning parameter.

```
p = rand(2,1);
e = rand(3,1);
lp.lr = 0.5;
```

Because `learnwh` only needs these values to calculate a weight change (see “Algorithm” below), use them to do so.

```
dW = learnwh([],p,[],[],[],[],e,[],[],[],lp,[])
```

Network Use

You can create a standard network that uses `learnwh` with `linearlayer`.

To prepare the weights and the bias of layer *i* of a custom network to learn with `learnwh`,

- 1 Set `net.trainFcn` to `'trainb'`. `net.trainParam` automatically becomes `trainb`'s default parameters.

learnwh

- 2 Set `net.adaptFcn` to `'trains'`. `net.adaptParam` automatically becomes `trains`'s default parameters.
- 3 Set each `net.inputWeights{i,j}.learnFcn` to `'learnwh'`.
- 4 Set each `net.layerWeights{i,j}.learnFcn` to `'learnwh'`.
- 5 Set `net.biases{i}.learnFcn` to `'learnwh'`. Each weight and bias learning parameter property is automatically set to `learnwh`'s default parameters.

To train the network (or enable it to adapt),

- 1 Set `net.trainParam` (`net.adaptParam`) properties to desired values.
- 2 Call `train` (`adapt`).

Algorithms

`learnwh` calculates the weight change dW for a given neuron from the neuron's input P and error E , and the weight (or bias) learning rate LR , according to the Widrow-Hoff learning rule:

$$dw = lr * e * pn'$$

References

Widrow, B., and M.E. Hoff, "Adaptive switching circuits," *1960 IRE WESCON Convention Record*, New York IRE, pp. 96–104, 1960

Widrow, B., and S.D. Sterns, *Adaptive Signal Processing*, New York, Prentice-Hall, 1985

See Also

`adapt` | `linearlayer` | `train`

Purpose Linear layer

Syntax `linearlayer(inputDelays,widrowHoffLR)`

Description Linear layers are single layers of linear neurons. They may be static, with input delays of 0, or dynamic, with input delays greater than 0. They can be trained on simple linear time series problems, but often are used adaptively to continue learning while deployed so they can adjust to changes in the relationship between inputs and outputs while being used.

If a network is needed to solve a nonlinear time series relationship, then better networks to try include `timedelaynet`, `narxnet`, and `narnet`.

`linearlayer(inputDelays,widrowHoffLR)` takes these arguments,

<code>inputDelays</code>	Row vector of increasing 0 or positive delays (default = 1:2)
<code>widrowHoffLR</code>	Widrow-Hoff learning rate (default = 0.01)

and returns a linear layer.

If the learning rate is too small, learning will happen very slowly. However, a greater danger is that it may be too large and learning will become unstable resulting in large changes to weight vectors and errors increasing instead of decreasing. If a data set is available which characterizes the relationship the layer is to learn, the maximum stable learning rate can be calculated with `maxlinlr`.

Examples Here a linear layer is trained on a simple time series problem.

```
x = {0 -1 1 1 0 -1 1 0 0 1};
t = {0 -1 0 2 1 -1 0 1 0 1}
net = linearlayer(1:2,0.01)
[Xs,Xi,Ai,Ts] = preparets(net,X,T)
net = train(net,Xs,Ts,Xi,Ai);
view(net)
```

linearlayer

```
Y = net(Xs,Xi);  
perf = perform(net,Ts,Y)
```

See Also

[preparets](#) | [removedelay](#) | [timedelaynet](#) | [narnet](#) | [narxnet](#)

Purpose	Link distance function
Syntax	<code>d = linkdist(pos)</code>
Description	<p><code>linkdist</code> is a layer distance function used to find the distances between the layer's neurons given their positions.</p> <p><code>d = linkdist(pos)</code> takes one argument,</p> <p><code>pos</code> N-by-S matrix of neuron positions</p> <p>and returns the S-by-S matrix of distances.</p>
Examples	<p>Here you define a random matrix of positions for 10 neurons arranged in three-dimensional space and find their distances.</p> <pre>pos = rand(3,10); D = linkdist(pos)</pre>
Network Use	<p>You can create a standard network that uses <code>linkdist</code> as a distance function by calling <code>selforgmap</code>.</p> <p>To change a network so that a layer's topology uses <code>linkdist</code>, set <code>net.layers{i}.distanceFcn</code> to <code>'linkdist'</code>.</p> <p>In either case, call <code>sim</code> to simulate the network with <code>dist</code>.</p>
Algorithms	<p>The link distance D between two position vectors P_i and P_j from a set of S vectors is</p> $D_{ij} = 0, \text{ if } i == j$ $= 1, \text{ if } (\text{sum}((P_i - P_j).^2)).^0.5 \text{ is } \leq 1$ $= 2, \text{ if } k \text{ exists, } D_{ik} = D_{kj} = 1$ $= 3, \text{ if } k_1, k_2 \text{ exist, } D_{ik_1} = D_{k_1k_2} = D_{k_2j} = 1$ $= N, \text{ if } k_1..k_N \text{ exist, } D_{ik_1} = D_{k_1k_2} = \dots = D_{k_Nj} = 1$ $= S, \text{ if none of the above conditions apply}$


linkdist

See Also

`dist` | `mandist` | `selforgmap` | `sim`

Purpose

Log-sigmoid transfer function

Graph and Symbol

$$a = \text{logsig}(n)$$

Log-Sigmoid Transfer Function

Syntax

```
A = logsig(N,FP)
dA_dN = logsig('dn',N,A,FP)
info = logsig('code')
```

Description

logsig is a transfer function. Transfer functions calculate a layer's output from its net input.

$A = \text{logsig}(N,FP)$ takes N and optional function parameters,

N S -by- Q matrix of net input (column) vectors

FP Struct of function parameters (ignored)

and returns A , the S -by- Q matrix of N 's elements squashed into $[0, 1]$.

$dA_dN = \text{logsig}('dn',N,A,FP)$ returns the S -by- Q derivative of A with respect to N . If A or FP is not supplied or is set to $[]$, FP reverts to the default parameters, and A is calculated from N .

$info = \text{logsig}('code')$ returns useful information for each *code* string:

$\text{logsig}('name')$ returns the name of this function.

$\text{logsig}('output',FP)$ returns the $[\text{min } \text{max}]$ output range.

$\text{logsig}('active',FP)$ returns the $[\text{min } \text{max}]$ active input range.

logsig

`logsig('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is S-by-S-by-Q or S-by-Q.

`logsig('fpnames')` returns the names of the function parameters.

`logsig('fpdefaults')` returns the default function parameters.

Examples

Here is the code to create a plot of the `logsig` transfer function.

```
n = -5:0.1:5;  
a = logsig(n);  
plot(n,a)
```

Assign this transfer function to layer `i` of a network.

```
net.layers{i}.transferFcn = 'logsig';
```

Algorithms

$$\text{logsig}(n) = 1 / (1 + \exp(-n))$$

See Also

`sim` | `tansig`

Purpose Learning vector quantization neural network

Syntax `lvqnet(hiddenSize,lvqLR,lvqLF)`

Description LVQ (learning vector quantization) neural networks consist of two layers. The first layer maps input vectors into clusters that are found by the network during training. The second layer maps merges groups of first layer clusters into the classes defined by the target data.

The total number of first layer clusters is determined by the number of hidden neurons. The larger the hidden layer the more clusters the first layer can learn, and the more complex mapping of input to target classes can be made. The relative number of first layer clusters assigned to each target class are determined according to the distribution of target classes at the time of network initialization. This occurs when the network is automatically configured the first time `train` is called, or manually configured with the function `configure`, or manually initialized with the function `init` is called.

`lvqnet(hiddenSize,lvqLR,lvqLF)` takes these arguments,

`hiddenSize` Size of hidden layer (default = 10)

`lvqLR` LVQ learning rate (default = 0.01)

`lvqLF` LVQ learning function (default = 'learnlv1')

and returns an LVQ neural network.

The other option for the lvq learning function is `learnlv2`.

Examples Here, an LVQ network is trained to classify iris flowers.

```
[x,t] = iris_dataset;
net = lvqnet(10)
net = train(net,x,t);
view(net)
y = net(x);
```

lvqnet

```
perf = perform(net,y,t)
classes = vec2ind(y)
```

See Also

[preparets](#) | [removedelay](#) | [timedelaynet](#) | [narnet](#) | [narxnet](#)

Purpose LVQ outputs processing function

Syntax

```
[X,settings] = lvqoutputs(X)
X = lvqoutputs('apply',X,PS)
X = lvqoutputs('reverse',X,PS)
dx_dy = lvqoutputs('dx_dy',X,X,PS)
```

Description [X,settings] = lvqoutputs(X) returns its argument unchanged, but stores the ratio of target classes in the settings for use by `initlvq` to initialize weights.

X = lvqoutputs('apply',X,PS) returns X.

X = lvqoutputs('reverse',X,PS) returns X.

dx_dy = lvqoutputs('dx_dy',X,X,PS) returns the identity derivative.

See Also lvqnet | initlvq

Purpose Mean absolute error performance function

Syntax `perf = mae(E,Y,X,FP)`

Description `mae` is a network performance function. It measures network performance as the mean of absolute errors.

`perf = mae(E,Y,X,FP)` takes E and optional function parameters,

E	Matrix or cell array of error vectors
Y	Matrix or cell array of output vectors (ignored)
X	Vector of all weight and bias values (ignored)
FP	Function parameters (ignored)

and returns the mean absolute error.

`dPerf_dx = mae('dx',E,Y,X,perf,FP)` returns the derivative of `perf` with respect to X.

`info = mae('code')` returns useful information for each `code` string:

`mae('name')` returns the name of this function.

`mae('pnames')` returns the names of the training parameters.

`mae('pdefaults')` returns the default function parameters.

Examples Create and configure a perceptron to have one input and one neuron:

```
net = perceptron;  
net = configure(net,0,0);
```

The network is given a batch of inputs P. The error is calculated by subtracting the output A from target T. Then the mean absolute error is calculated.

```
p = [-10 -5 0 5 10];  
t = [0 0 1 1 1];
```

```
y = net(p)
e = t-y
perf = mae(e)
```

Note that `mae` can be called with only one argument because the other arguments are ignored. `mae` supports those arguments to conform to the standard performance function argument list.

Network Use

You can create a standard network that uses `mae` with `perceptron`.

To prepare a custom network to be trained with `mae`, set `net.performFcn` to `'mae'`. This automatically sets `net.performParam` to the empty matrix `[]`, because `mae` has no performance parameters.

In either case, calling `train` or `adapt`, results in `mae` being used to calculate performance.

See Also

`mse` | `perceptron`

mandist

Purpose Manhattan distance weight function

Syntax `Z = mandist(W,P)`
`D = mandist(pos)`

Description `mandist` is the Manhattan distance weight function. Weight functions apply weights to an input to get weighted inputs.

`Z = mandist(W,P)` takes these inputs,

`W` `S`-by-`R` weight matrix

`P` `R`-by-`Q` matrix of `Q` input (column) vectors

and returns the `S`-by-`Q` matrix of vector distances.

`mandist` is also a layer distance function, which can be used to find the distances between neurons in a layer.

`D = mandist(pos)` takes one argument,

`pos` `S` row matrix of neuron positions

and returns the `S`-by-`S` matrix of distances.

Examples Here you define a random weight matrix `W` and input vector `P` and calculate the corresponding weighted input `Z`.

```
W = rand(4,3);  
P = rand(3,1);  
Z = mandist(W,P)
```

Here you define a random matrix of positions for 10 neurons arranged in three-dimensional space and then find their distances.

```
pos = rand(3,10);  
D = mandist(pos)
```


**Network
Use**

To change a network so an input weight uses `mandist`, set `net.inputWeight{i,j}.weightFcn` to `'mandist'`. For a layer weight, set `net.layerWeight{i,j}.weightFcn` to `'mandist'`.

To change a network so a layer's topology uses `mandist`, set `net.layers{i}.distanceFcn` to `'mandist'`.

In either case, call `sim` to simulate the network with `dist`. See `newpnn` or `newgrnn` for simulation examples.

Algorithms

The Manhattan distance D between two vectors X and Y is

$$D = \text{sum}(\text{abs}(x-y))$$

See Also

`dist` | `linkdist` | `sim`

mapminmax

Purpose Process matrices by mapping row minimum and maximum values to [-1 1]

Syntax

```
[Y,PS] = mapminmax(X,YMIN,YMAX)
[Y,PS] = mapminmax(X,FP)
Y = mapminmax('apply',X,PS)
X = mapminmax('reverse',Y,PS)
dx_dy = mapminmax('dx_dy',X,Y,PS)
```

Description mapminmax processes matrices by normalizing the minimum and maximum values of each row to [YMIN, YMAX].

[Y,PS] = mapminmax(X,YMIN,YMAX) takes X and optional parameters

X	N-by-Q matrix or a 1-by-TS row cell array of N-by-Q matrices
YMIN	Minimum value for each row of Y (default is -1)
YMAX	Maximum value for each row of Y (default is +1)

and returns

Y	Each M-by-Q matrix (where M == N) (optional)
PS	Process settings that allow consistent processing of values

[Y,PS] = mapminmax(X,FP) takes parameters as a struct: FP.ymin, FP.ymax.

Y = mapminmax('apply',X,PS) returns Y, given X and settings PS.

X = mapminmax('reverse',Y,PS) returns X, given Y and settings PS.

dx_dy = mapminmax('dx_dy',X,Y,PS) returns the reverse derivative.

Examples

Here is how to format a matrix so that the minimum and maximum values of each row are mapped to default interval [-1,+1].

```
x1 = [1 2 4; 1 1 1; 3 2 2; 0 0 0]
[y1,PS] = mapminmax(x1)
```

Next, apply the same processing settings to new values.

```
x2 = [5 2 3; 1 1 1; 6 7 3; 0 0 0]
y2 = mapminmax('apply',x2,PS)
```

Reverse the processing of y1 to get x1 again.

```
x1_again = mapminmax('reverse',y1,PS)
```

Algorithms

It is assumed that X has only finite real values, and that the elements of each row are not all equal. (If $x_{\max}=x_{\min}$ or if either x_{\max} or x_{\min} are non-finite, then $y=x$ and no change occurs.)

$$y = (y_{\max}-y_{\min}) * (x-x_{\min}) / (x_{\max}-x_{\min}) + y_{\min};$$

Definitions

Before training, it is often useful to scale the inputs and targets so that they always fall within a specified range. The function `mapminmax` scales inputs and targets so that they fall in the range [-1,1]. The following code illustrates how to use this function.

```
[pn,ps] = mapminmax(p);
[tn,ts] = mapminmax(t);
net = train(net,pn,tn);
```

The original network inputs and targets are given in the matrices `p` and `t`. The normalized inputs and targets `pn` and `tn` that are returned will all fall in the interval [-1,1]. The structures `ps` and `ts` contain the settings, in this case the minimum and maximum values of the original inputs and targets. After the network has been trained, the `ps` settings should be used to transform any future inputs that are applied to the network. They effectively become a part of the network, just like the network weights and biases.

mapminmax

If `mapminmax` is used to scale the targets, then the output of the network will be trained to produce outputs in the range $[-1,1]$. To convert these outputs back into the same units that were used for the original targets, use the settings `ts`. The following code simulates the network that was trained in the previous code, and then converts the network output back into the original units.

```
an = sim(net,pn);  
a = mapminmax('reverse',an,ts);
```

The network output `an` corresponds to the normalized targets `tn`. The unnormalized network output `a` is in the same units as the original targets `t`.

If `mapminmax` is used to preprocess the training set data, then whenever the trained network is used with new inputs they should be preprocessed with the minimum and maximums that were computed for the training set stored in the settings `ps`. The following code applies a new set of inputs to the network already trained.

```
pnewn = mapminmax('apply',pnew,ps);  
anewn = sim(net,pnewn);  
anewn = mapminmax('reverse',anewn,ts);
```

For most networks, including `feedforwardnet`, these steps are done automatically, so that you only need to use the `sim` command.

See Also

[fixunknowns](#) | [mapstd](#) | [processpca](#)

Purpose Process matrices by mapping each row's means to 0 and deviations to 1

Syntax

```
[Y,PS] = mapstd(X,ymean,ystd)
[Y,PS] = mapstd(X,FP)
Y = mapstd('apply',X,PS)
X = mapstd('reverse',Y,PS)
dx_dy = mapstd('dx_dy',X,Y,PS)
```

Description mapstd processes matrices by transforming the mean and standard deviation of each row to ymean and ystd.

[Y,PS] = mapstd(X,ymean,ystd) takes X and optional parameters,

X	N-by-Q matrix or a 1-by-TS row cell array of N-by-Q matrices
ymean	Mean value for each row of Y (default is 0)
ystd	Standard deviation for each row of Y (default is 1)

and returns

Y	Each M-by-Q matrix (where M == N) (optional)
PS	Process settings that allow consistent processing of values

[Y,PS] = mapstd(X,FP) takes parameters as a struct: FP.ymean, FP.ystd.

Y = mapstd('apply',X,PS) returns Y, given X and settings PS.

X = mapstd('reverse',Y,PS) returns X, given Y and settings PS.

dx_dy = mapstd('dx_dy',X,Y,PS) returns the reverse derivative.

Examples Here you format a matrix so that the minimum and maximum values of each row are mapped to default mean and STD of 0 and 1.

```
x1 = [1 2 4; 1 1 1; 3 2 2; 0 0 0]
[y1,PS] = mapstd(x1)
```

Next, apply the same processing settings to new values.

```
x2 = [5 2 3; 1 1 1; 6 7 3; 0 0 0]
y2 = mapstd('apply',x2,PS)
```

Reverse the processing of y1 to get x1 again.

```
x1_again = mapstd('reverse',y1,PS)
```

Algorithms

It is assumed that X has only finite real values, and that the elements of each row are not all equal.

```
y = (x-xmean)*(ystd/xstd) + ymean;
```

Definitions

Another approach for scaling network inputs and targets is to normalize the mean and standard deviation of the training set. The function `mapstd` normalizes the inputs and targets so that they will have zero mean and unity standard deviation. The following code illustrates the use of `mapstd`.

```
[pn,ps] = mapstd(p);
[tn,ts] = mapstd(t);
```

The original network inputs and targets are given in the matrices `p` and `t`. The normalized inputs and targets `pn` and `tn` that are returned will have zero means and unity standard deviation. The settings structures `ps` and `ts` contain the means and standard deviations of the original inputs and original targets. After the network has been trained, you should use these settings to transform any future inputs that are applied to the network. They effectively become a part of the network, just like the network weights and biases.

If `mapstd` is used to scale the targets, then the output of the network is trained to produce outputs with zero mean and unity standard deviation. To convert these outputs back into the same units that were

used for the original targets, use `ts`. The following code simulates the network that was trained in the previous code, and then converts the network output back into the original units.

```
an = sim(net,pn);  
a = mapstd('reverse',an,ts);
```

The network output `an` corresponds to the normalized targets `tn`. The unnormalized network output `a` is in the same units as the original targets `t`.

If `mapstd` is used to preprocess the training set data, then whenever the trained network is used with new inputs, you should preprocess them with the means and standard deviations that were computed for the training set using `ps`. The following commands apply a new set of inputs to the network already trained:

```
pnewn = mapstd('apply',pnew,ps);  
anewn = sim(net,pnewn);  
anew = mapstd('reverse',anewn,ts);
```

For most networks, including `feedforwardnet`, these steps are done automatically, so that you only need to use the `sim` command.

See Also

`fixunknowns` | `mapminmax` | `processpca`

maxlinlr

Purpose Maximum learning rate for linear layer

Syntax
`lr = maxlinlr(P)`
`lr = maxlinlr(P, 'bias')`

Description `maxlinlr` is used to calculate learning rates for `linearlayer`.

`lr = maxlinlr(P)` takes one argument,

`P` R-by-Q matrix of input vectors

and returns the maximum learning rate for a linear layer without a bias that is to be trained only on the vectors in `P`.

`lr = maxlinlr(P, 'bias')` returns the maximum learning rate for a linear layer with a bias.

Examples Here you define a batch of four two-element input vectors and find the maximum learning rate for a linear layer with a bias.

```
P = [1 2 -4 7; 0.1 3 10 6];  
lr = maxlinlr(P, 'bias')
```

See Also `learnwh` | `linearlayer`

Purpose Mean of absolute elements of matrix or matrices

Syntax `[m,n] = meanabs(x)`

Description `[m,n] = meanabs(x)` takes a matrix or cell array of matrices and returns,

`m` Mean value of all absolute finite values

`n` Number of finite values

If `x` contains no finite values, the mean returned is 0.

Examples

```
m = meanabs([1 2;3 4])  
[m,n] = meanabs({[1 2; NaN 4], [4 5; 2 3]})
```

See Also `meansqr` | `sumabs` | `sumsqr`

meansqr

Purpose Mean of squared elements of matrix or matrices

Syntax `[m,n] = meansqr(x)`

Description `[m,n] = meansqr(x)` takes a matrix or cell array of matrices and returns,

m Mean value of all squared finite values

n Number of finite values

If `x` contains no finite values, the mean returned is 0.

Examples

```
m = meansqr([1 2;3 4])  
[m,n] = meansqr({[1 2; NaN 4], [4 5; 2 3]})
```

See Also `meanabs` | `sumabs` | `sumsqr`

Purpose Midpoint weight initialization function

Syntax `W = midpoint(S,PR)`

Description `midpoint` is a weight initialization function that sets weight (row) vectors to the center of the input ranges.

`W = midpoint(S,PR)` takes two arguments,

`S` Number of rows (neurons)

`PR` R-by-Q matrix of input value ranges = [`Pmin` `Pmax`]

and returns an S-by-R matrix with rows set to $(P_{min}+P_{max})' / 2$.

Examples Here initial weight values are calculated for a five-neuron layer with input elements ranging over [0 1] and [-2 2].

```
W = midpoint(5,[0 1; -2 2])
```

Network Use You can create a standard network that uses `midpoint` to initialize weights by calling `newc`.

To prepare the weights and the bias of layer `i` of a custom network to initialize with `midpoint`,

- 1 Set `net.initFcn` to `'initlay'`. (`net.initParam` automatically becomes `initlay`'s default parameters.)
- 2 Set `net.layers{i}.initFcn` to `'initwb'`.
- 3 Set each `net.inputWeights{i,j}.initFcn` to `'midpoint'`. Set each `net.layerWeights{i,j}.initFcn` to `'midpoint'`.

To initialize the network, call `init`.

See Also `initwb` | `initlay` | `init`

minmax

Purpose Ranges of matrix rows

Syntax `pr = minmax(P)`

Description `pr = minmax(P)` takes one argument,
`P` R-by-Q matrix

and returns the R-by-2 matrix PR of minimum and maximum values for each row of P.

Alternatively, P can be an M-by-N cell array of matrices. Each matrix P{i,j} should have Ri rows and Q columns. In this case, minmax returns an M-by-1 cell array where the mth matrix is an Ri-by-2 matrix of the minimum and maximum values of elements for the matrix on the ith row of P.

Examples

```
P = [0 1 2; -1 -2 -0.5]
pr = minmax(P)
P = {[0 1; -1 -2] [2 3 -2; 8 0 2]; [1 -2] [9 7 3]};
pr = minmax(P)
```

Purpose Mean squared normalized error performance function

Syntax `perf = mse(net,t,y,ew)`

Description `mse` is a network performance function. It measures the network's performance according to the mean of squared errors.

`perf = mse(net,t,y,ew)` takes these arguments:

<code>net</code>	Neural network
<code>t</code>	Matrix or cell array of targets
<code>y</code>	Matrix or cell array of outputs
<code>ew</code>	Error weights (optional)

and returns the mean squared error.

This function has two optional parameters, which are associated with networks whose `net.trainFcn` is set to this function:

- `'regularization'` can be set to any value between 0 and 1. The greater the regularization value, the more squared weights and biases are included in the performance calculation relative to errors. The default is 0, corresponding to no regularization.
- `'normalization'` can be set to `'none'` (the default); `'standard'`, which normalizes errors between -2 and 2, corresponding to normalizing outputs and targets between -1 and 1; and `'percent'`, which normalizes errors between -1 and 1. This feature is useful for networks with multi-element outputs. It ensures that the relative accuracy of output elements with differing target value ranges are treated as equally important, instead of prioritizing the relative accuracy of the output element with the largest target value range.

You can create a standard network that uses `mse` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `mse`, set `net.performFcn` to `'mse'`. This automatically sets

`net.performParam` to a structure with the default optional parameter values.

Examples

Here a two-layer feedforward network is created and trained to predict median house prices using the `mse` performance function and a regularization value of 0.01, which is the default performance function for `feedforwardnet`.

```
[x,t] = house_dataset;
net = feedforwardnet(10);
net.performFcn = 'mse'; % Redundant, MSE is default
net.performParam.regularization = 0.01;
net = train(net,x,t);
y = net(x);
perf = perform(net,t,y);
```

Alternately, you can call this function directly.

```
perf = mse(net,x,t,'regularization',0.01);
```

See Also

`mae`

Purpose Nonlinear autoregressive neural network

Syntax `narnet(feedbackDelays,hiddenSizes,trainFcn)`

Description NAR (nonlinear autoregressive) neural networks can be trained to predict a time series from that series past values.

`narnet(feedbackDelays,hiddenSizes,trainFcn)` takes these arguments,

<code>feedbackDelays</code>	Row vector of increasing 0 or positive delays (default = 1:2)
<code>hiddenSizes</code>	Row vector of one or more hidden layer sizes (default = 10)
<code>trainFcn</code>	Training function (default = 'trainlm')

and returns a NAR neural network.

Examples Here a NAR network is used to solve a simple time series problem.

```
T = simplenar_dataset;
net = narnet(1:2,10)
[Xs,Xi,Ai,Ts] = preparets(net,{}, {},T)
net = train(net,Xs,Ts,Xi,Ai);
view(net)
Y = net(Xs,Xi);
perf = perform(net,Ts,Y)
```

See Also `preparets` | `removedelay` | `timedelaynet` | `narnet` | `narxnet`

narxnet

Purpose	Nonlinear autoregressive neural network with external input								
Syntax	<code>narxnet(inputDelays,feedbackDelays,hiddenSizes,trainFcn)</code>								
Description	<p>NARX (Nonlinear autoregressive with external input) networks can learn to predict one time series given past values of the same time series, the feedback input, and another time series, called the external or exogenous time series.</p> <p><code>narxnet(inputDelays,feedbackDelays,hiddenSizes,trainFcn)</code> takes these arguments,</p> <table><tr><td><code>inputDelays</code></td><td>Row vector of increasing 0 or positive delays (default = 1:2)</td></tr><tr><td><code>feedbackDelays</code></td><td>Row vector of increasing 0 or positive delays (default = 1:2)</td></tr><tr><td><code>hiddenSizes</code></td><td>Row vector of one or more hidden layer sizes (default = 10)</td></tr><tr><td><code>trainFcn</code></td><td>Training function (default = 'trainlm')</td></tr></table>	<code>inputDelays</code>	Row vector of increasing 0 or positive delays (default = 1:2)	<code>feedbackDelays</code>	Row vector of increasing 0 or positive delays (default = 1:2)	<code>hiddenSizes</code>	Row vector of one or more hidden layer sizes (default = 10)	<code>trainFcn</code>	Training function (default = 'trainlm')
<code>inputDelays</code>	Row vector of increasing 0 or positive delays (default = 1:2)								
<code>feedbackDelays</code>	Row vector of increasing 0 or positive delays (default = 1:2)								
<code>hiddenSizes</code>	Row vector of one or more hidden layer sizes (default = 10)								
<code>trainFcn</code>	Training function (default = 'trainlm')								

and returns a NARX neural network.

Examples Here a NARX neural network is used to solve a simple time series problem.

```
[X,T] = simpleseries_dataset;  
net = narxnet(1:2,1:2,10)  
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T)  
net = train(net,Xs,Ts,Xi,Ai);  
view(net)  
Y = net(Xs,Xi,Ai);  
perf = perform(net,Ts,Y)
```

Here the NARX network is simulated in closed loop form.


```
netc = closeloop(net);  
view(netc)  
[Xs,Xi,Ai,Ts] = preparets(netc,X,{},T);  
y = netc(Xs,Xi,Ai)
```

Here the NARX network is used to predict the next output a timestep ahead of when it will actually appear.

```
netp = removedelay(net);  
view(netp)  
[Xs,Xi,Ai,Ts] = preparets(netp,X,{},T);  
y = netp(Xs,Xi,Ai)
```

See Also

[closeloop](#) | [narnet](#) | [openloop](#) | [preparets](#) | [removedelay](#) | [timedelaynet](#)

nctool

Purpose Neural network classification or clustering tool

Syntax nctool

Description nctool opens the neural network clustering GUI.

Algorithms nctool leads you through solving a clustering problem using a self-organizing map. The map forms a compressed representation of the inputs space, reflecting both the relative density of input vectors in that space, and a two-dimensional compressed representation of the input-space topology.

Purpose

Negative distance weight function

Syntax

```
Z = negdist(W,P)
dim = negdist('size',S,R,FP)
dw = negdist('dz_dw',W,P,Z,FP)
```

Description

`negdist` is a weight function. Weight functions apply weights to an input to get weighted inputs.

`Z = negdist(W,P)` takes these inputs,

W	S-by-R weight matrix
P	R-by-Q matrix of Q input (column) vectors
FP	Row cell array of function parameters (optional, ignored)

and returns the S-by-Q matrix of negative vector distances.

`dim = negdist('size',S,R,FP)` takes the layer dimension S, input dimension R, and function parameters, and returns the weight size [S-by-R].

`dw = negdist('dz_dw',W,P,Z,FP)` returns the derivative of Z with respect to W.

Examples

Here you define a random weight matrix W and input vector P and calculate the corresponding weighted input Z.

```
W = rand(4,3);
P = rand(3,1);
Z = negdist(W,P)
```

negdist

Network Use

You can create a standard network that uses `negdist` by calling `competlayer` or `selforgmap`.

To change a network so an input weight uses `negdist`, set `net.inputWeight{i,j}.weightFcn` to `'negdist'`. For a layer weight, set `net.layerWeight{i,j}.weightFcn` to `'negdist'`.

In either case, call `sim` to simulate the network with `negdist`.

Algorithms

`negdist` returns the negative Euclidean distance:

$$z = -\sqrt{\sum(w-p)^2}$$

See Also

`competlayer` | `dist` | `dotprod` | `selforgmap` | `sim`

Purpose Inverse transfer function

Syntax `A = netinv(N,FP)`

Description `netinv` is a transfer function. Transfer functions calculate a layer's output from its net input.

`A = netinv(N,FP)` takes inputs

<code>N</code>	S-by-Q matrix of net input (column) vectors
<code>FP</code>	Struct of function parameters (ignored)

and returns `1/N`.

`info = netinv('code')` returns information about this function. The following codes are supported:

`netinv('name')` returns the name of this function.

`netinv('output',FP)` returns the [min max] output range.

`netinv('active',FP)` returns the [min max] active input range.

`netinv('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is S-by-S-by-Q or S-by-Q.

`netinv('fpnames')` returns the names of the function parameters.

`netinv('fpdefaults')` returns the default function parameters.

Examples Here you define 10 five-element net input vectors `N` and calculate `A`.

```
n = rand(5,10);  
a = netinv(n);
```

Assign this transfer function to layer `i` of a network.

```
net.layers{i}.transferFcn = 'netinv';
```

netinv

See Also

tansig | logsig

Purpose Product net input function

Syntax `N = netprod({Z1,Z2,...,Zn})`
`info = netprod('code')`

Description netprod is a net input function. Net input functions calculate a layer's net input by combining its weighted inputs and biases.

`N = netprod({Z1,Z2,...,Zn})` takes

`Zi` S-by-Q matrices in a row cell array

and returns an element-wise product of `Z1` to `Zn`.

`info = netprod('code')` returns information about this function. The following codes are supported:

<code>'deriv'</code>	Name of derivative function
<code>'fullderiv'</code>	Full N-by-S-by-Q derivative = 1, element-wise S-by-Q derivative = 0
<code>'name'</code>	Full name
<code>'fpnames'</code>	Returns names of function parameters
<code>'fpdefaults'</code>	Returns default function parameters

Examples Here netprod combines two sets of weighted input vectors (user-defined).

```
Z1 = [1 2 4;3 4 1];
Z2 = [-1 2 2; -5 -6 1];
Z = {Z1,Z2};
N = netprod({Z})
```

netprod

Here `netprod` combines the same weighted inputs with a bias vector. Because `Z1` and `Z2` each contain three concurrent vectors, three concurrent copies of `B` must be created with `concur` so that all sizes match.

```
B = [0; -1];  
Z = {Z1, Z2, concur(B,3)};  
N = netprod(Z)
```

Network Use

You can create a standard network that uses `netprod` by calling `newpnn` or `newgrnn`.

To change a network so that a layer uses `netprod`, set `net.layers{i}.netInputFcn` to `'netprod'`.

In either case, call `sim` to simulate the network with `netprod`. See `newpnn` or `newgrnn` for simulation examples.

See Also

`sim` | `netsum` | `concur`

Purpose

Sum net input function

Syntax

```
N = netsum({Z1,Z2,...,Zn},FP)
info = netsum('code')
```

Description

netsum is a net input function. Net input functions calculate a layer's net input by combining its weighted inputs and biases.

`N = netsum({Z1,Z2,...,Zn},FP)` takes Z1 to Zn and optional function parameters,

<code>Zi</code>	S-by-Q matrices in a row cell array
<code>FP</code>	Row cell array of function parameters (ignored)

and returns the elementwise sum of Z1 to Zn.

`info = netsum('code')` returns information about this function. The following codes are supported:

`netsum('name')` returns the name of this function.

`netsum('type')` returns the type of this function.

`netsum('fpnames')` returns the names of the function parameters.

`netsum('fpdefaults')` returns default function parameter values.

`netsum('fpcheck', FP)` throws an error for illegal function parameters.

`netsum('fullderiv')` returns 0 or 1, depending on whether the derivative is S-by-Q or N-by-S-by-Q.

Examples

Here netsum combines two sets of weighted input vectors and a bias. You must use `concur` to make `B` the same dimensions as Z1 and Z2.

```
z1 = [1 2 4; 3 4 1]
z2 = [-1 2 2; -5 -6 1]
b = [0; -1]
```

netsum

```
n = netsum({z1,z2,concur(b,3)})
```

Assign this net input function to layer *i* of a network.

```
net.layers(i).netFcn = 'compet';
```

Use `feedforwardnet` or `cascadeforwardnet` to create a standard network that uses `netsum`.

See Also

`cascadeforwardnet` | `feedforwardnet` | `netprod` | `netinv`

Purpose

Create custom neural network

Syntax

```
net = network
net = network(numInputs,numLayers,biasConnect,inputConnect,
              layerConnect,outputConnect)
```

To Get Help

Type `help network/network`.

Description

`network` creates new custom networks. It is used to create networks that are then customized by functions such as `feedforwardnet` and `narxnet`.

`net = network` without arguments returns a new neural network with no inputs, layers or outputs.

`net = network(numInputs,numLayers,biasConnect,inputConnect,layerConnect,outputConnect)` takes these optional arguments (shown with default values):

<code>numInputs</code>	Number of inputs, 0
<code>numLayers</code>	Number of layers, 0
<code>biasConnect</code>	<code>numLayers</code> -by-1 Boolean vector, zeros
<code>inputConnect</code>	<code>numLayers</code> -by- <code>numInputs</code> Boolean matrix, zeros
<code>layerConnect</code>	<code>numLayers</code> -by- <code>numLayers</code> Boolean matrix, zeros
<code>outputConnect</code>	1-by- <code>numLayers</code> Boolean vector, zeros

and returns

<code>net</code>	New network with the given property values
------------------	--

network

Properties

Architecture Properties

<code>net.numInputs</code>	0 or a positive integer	Number of inputs.
<code>net.numLayers</code>	0 or a positive integer	Number of layers.
<code>net.biasConnect</code>	numLayer-by-1 Boolean vector	If <code>net.biasConnect(i)</code> is 1, then layer <code>i</code> has a bias, and <code>net.biases{i}</code> is a structure describing that bias.
<code>net.inputConnect</code>	numLayer-by-numInputs Boolean vector	If <code>net.inputConnect(i,j)</code> is 1, then layer <code>i</code> has a weight coming from input <code>j</code> , and <code>net.inputWeights{i,j}</code> is a structure describing that weight.
<code>net.layerConnect</code>	numLayer-by-numLayers Boolean vector	If <code>net.layerConnect(i,j)</code> is 1, then layer <code>i</code> has a weight coming from layer <code>j</code> , and <code>net.layerWeights{i,j}</code> is a structure describing that weight.
<code>net.numInputs</code>	0 or a positive integer	Number of inputs.
<code>net.numLayers</code>	0 or a positive integer	Number of layers.
<code>net.biasConnect</code>	numLayer-by-1 Boolean vector	If <code>net.biasConnect(i)</code> is 1, then layer <code>i</code> has a bias, and <code>net.biases{i}</code> is a structure describing that bias.

<code>net.inputConnect</code>	<code>numLayer-by-numInputs</code> Boolean vector	If <code>net.inputConnect(i, j)</code> is 1, then layer <code>i</code> has a weight coming from input <code>j</code> , and <code>net.inputWeights{i, j}</code> is a structure describing that weight.
<code>net.layerConnect</code>	<code>numLayer-by-numLayers</code> Boolean vector	If <code>net.layerConnect(i, j)</code> is 1, then layer <code>i</code> has a weight coming from layer <code>j</code> , and <code>net.layerWeights{i, j}</code> is a structure describing that weight.
<code>net.outputConnect</code>	<code>1-by-numLayers</code> Boolean vector	If <code>net.outputConnect(i)</code> is 1, then the network has an output from layer <code>i</code> , and <code>net.outputs{i}</code> is a structure describing that output.
<code>net.numOutputs</code>	0 or a positive integer (read only)	Number of network outputs according to <code>net.outputConnect</code> .
<code>net.numInputDelay</code>	0 or a positive integer (read only)	Maximum input delay according to all <code>net.inputWeight{i, j}.delays</code> .
<code>net.numLayerDelay</code>	0 or a positive number (read only)	Maximum layer delay according to all <code>net.layerWeight{i, j}.delays</code> .

Subobject Structure Properties

<code>net.inputs</code>	<code>numInputs-by-1</code> cell array	<code>net.inputs{i}</code> is a structure defining input <code>i</code> .
<code>net.layers</code>	<code>numLayers-by-1</code> cell array	<code>net.layers{i}</code> is a structure defining layer <code>i</code> .

network

<code>net.biases</code>	<code>numLayers-by-1</code> cell array	If <code>net.biasConnect(i)</code> is 1, then <code>net.biases{i}</code> is a structure defining the bias for layer <code>i</code> .
<code>net.inputWeights</code>	<code>numLayers-by-numInputs</code> cell array	If <code>net.inputConnect(i,j)</code> is 1, then <code>net.inputWeights{i,j}</code> is a structure defining the weight to layer <code>i</code> from input <code>j</code> .
<code>net.layerWeights</code>	<code>numLayers-by-numLayers</code> cell array	If <code>net.layerConnect(i,j)</code> is 1, then <code>net.layerWeights{i,j}</code> is a structure defining the weight to layer <code>i</code> from layer <code>j</code> .
<code>net.outputs</code>	<code>1-by-numLayers</code> cell array	If <code>net.outputConnect(i)</code> is 1, then <code>net.outputs{i}</code> is a structure defining the network output from layer <code>i</code> .

Function Properties

<code>net.adaptFcn</code>	Name of a network adaption function or ''
<code>net.initFcn</code>	Name of a network initialization function or ''
<code>net.performFcn</code>	Name of a network performance function or ''
<code>net.trainFcn</code>	Name of a network training function or ''

Parameter Properties

<code>net.adaptParam</code>	Network adaption parameters
<code>net.initParam</code>	Network initialization parameters

<code>net.performParam</code>	Network performance parameters
<code>net.trainParam</code>	Network training parameters

Weight and Bias Value Properties

<code>net.IW</code>	<code>numLayers-by-numInputs</code> cell array of input weight values
<code>net.LW</code>	<code>numLayers-by-numLayers</code> cell array of layer weight values
<code>net.b</code>	<code>numLayers-by-1</code> cell array of bias values

Other Properties

<code>net.userdata</code>	Structure you can use to store useful values
---------------------------	--

Examples

Here is the code to create a network without any inputs and layers, and then set its numbers of inputs and layers to 1 and 2 respectively.

```
net = network
net.numInputs = 1
net.numLayers = 2
```

Here is the code to create the same network with one line of code.

```
net = network(1,2)
```

Here is the code to create a one-input, two-layer, feed-forward network. Only the first layer has a bias. An input weight connects to layer 1 from input 1. A layer weight connects to layer 2 from layer 1. Layer 2 is a network output and has a target.

```
net = network(1,2,[1;0],[1; 0],[0 0; 1 0],[0 1])
```

You can see the properties of subobjects as follows:

```
net.inputs{1}
net.layers{1}, net.layers{2}
net.biases{1}
net.inputWeights{1,1}, net.layerWeights{2,1}
net.outputs{2}
```

You can get the weight matrices and bias vector as follows:

```
net.iw.{1,1}, net.iw{2,1}, net.b{1}
```

You can alter the properties of any of these subobjects. Here you change the transfer functions of both layers:

```
net.layers{1}.transferFcn = 'tansig';
net.layers{2}.transferFcn = 'logsig';
```

Here you change the number of elements in input 1 to 2 by setting each element's range:

```
net.inputs{1}.range = [0 1; -1 1];
```

Next you can simulate the network for a two-element input vector:

```
p = [0.5; -0.1];
y = sim(net,p)
```

See Also

`sim`

Purpose Design generalized regression neural network

Syntax `net = newgrnn(P,T,spread)`

Description Generalized regression neural networks (grnns) are a kind of radial basis network that is often used for function approximation. grnns can be designed very quickly.

`net = newgrnn(P,T,spread)` takes three inputs,

`P` R-by-Q matrix of Q input vectors

`T` S-by-Q matrix of Q target class vectors

`spread` Spread of radial basis functions (default = 1.0)

and returns a new generalized regression neural network.

The larger the `spread`, the smoother the function approximation. To fit data very closely, use a `spread` smaller than the typical distance between input vectors. To fit the data more smoothly, use a larger `spread`.

Properties `newgrnn` creates a two-layer network. The first layer has `radbas` neurons, and calculates weighted inputs with `dist` and net input with `netprod`. The second layer has `purelin` neurons, calculates weighted input with `normprod`, and net inputs with `netsum`. Only the first layer has biases.

`newgrnn` sets the first layer weights to P' , and the first layer biases are all set to $0.8326/\text{spread}$, resulting in radial basis functions that cross 0.5 at weighted inputs of $\pm \text{spread}$. The second layer weights `W2` are set to `T`.

Examples Here you design a radial basis network, given inputs `P` and targets `T`.

```
P = [1 2 3];
T = [2.0 4.1 5.9];
```

newgrnn

```
net = newgrnn(P,T);
```

The network is simulated for a new input.

```
P = 1.5;
```

```
Y = sim(net,P)
```

References

Wasserman, P.D., *Advanced Methods in Neural Computing*, New York, Van Nostrand Reinhold, 1993, pp. 155–61

See Also

`sim` | `newrb` | `newrbe` | `newpnn`

Purpose Design linear layer

Syntax `net = newlind(P,T,Pi)`

Description `net = newlind(P,T,Pi)` takes these input arguments,

P	R-by-Q matrix of Q input vectors
T	S-by-Q matrix of Q target class vectors
Pi	1-by-ID cell array of initial input delay states

where each element $P_{i,k}$ is an R_i -by- Q matrix, and the default = `[]`; and returns a linear layer designed to output T (with minimum sum square error) given input P.

`newlind(P,T,Pi)` can also solve for linear networks with input delays and multiple inputs and layers by supplying input and target data in cell array form:

P	N_i -by-TS cell array	Each element $P_{i,ts}$ is an R_i -by- Q input matrix
T	N_t -by-TS cell array	Each element $T_{i,ts}$ is a V_i -by- Q matrix
Pi	N_i -by-ID cell array	Each element $P_{i,k}$ is an R_i -by- Q matrix, default = <code>[]</code>

and returns a linear network with ID input delays, N_i network inputs, and N_l layers, designed to output T (with minimum sum square error) given input P.

Examples

You want a linear layer that outputs T given P for the following definitions:

```
P = [1 2 3];
T = [2.0 4.1 5.9];
```

Use `newlind` to design such a network and check its response.

```
net = newlind(P,T);  
Y = sim(net,P)
```

You want another linear layer that outputs the sequence `T` given the sequence `P` and two initial input delay states `Pi`.

```
P = {1 2 1 3 3 2};  
Pi = {1 3};  
T = {5.0 6.1 4.0 6.0 6.9 8.0};  
net = newlind(P,T,Pi);  
Y = sim(net,P,Pi)
```

You want a linear network with two outputs `Y1` and `Y2` that generate sequences `T1` and `T2`, given the sequences `P1` and `P2`, with three initial input delay states `Pi1` for input 1 and three initial delays states `Pi2` for input 2.

```
P1 = {1 2 1 3 3 2}; Pi1 = {1 3 0};  
P2 = {1 2 1 1 2 1}; Pi2 = {2 1 2};  
T1 = {5.0 6.1 4.0 6.0 6.9 8.0};  
T2 = {11.0 12.1 10.1 10.9 13.0 13.0};  
net = newlind([P1; P2],[T1; T2],[Pi1; Pi2]);  
Y = sim(net,[P1; P2],[Pi1; Pi2]);  
Y1 = Y(1,:);  
Y2 = Y(2,:);
```

Algorithms

`newlind` calculates weight `W` and bias `B` values for a linear layer from inputs `P` and targets `T` by solving this linear equation in the least squares sense:

$$[W \ b] * [P; \text{ones}] = T$$

See Also

`sim`

Purpose Design probabilistic neural network

Syntax `net = newpnn(P,T,spread)`

Description Probabilistic neural networks (PNN) are a kind of radial basis network suitable for classification problems.

`net = newpnn(P,T,spread)` takes two or three arguments,

<code>P</code>	R-by-Q matrix of Q input vectors
<code>T</code>	S-by-Q matrix of Q target class vectors
<code>spread</code>	Spread of radial basis functions (default = 0.1)

and returns a new probabilistic neural network.

If `spread` is near zero, the network acts as a nearest neighbor classifier. As `spread` becomes larger, the designed network takes into account several nearby design vectors.

Examples Here a classification problem is defined with a set of inputs `P` and class indices `Tc`.

```
P = [1 2 3 4 5 6 7];
Tc = [1 2 3 2 2 3 1];
```

The class indices are converted to target vectors, and a PNN is designed and tested.

```
T = ind2vec(Tc)
net = newpnn(P,T);
Y = sim(net,P)
Yc = vec2ind(Y)
```

Algorithms `newpnn` creates a two-layer network. The first layer has `radbas` neurons, and calculates its weighted inputs with `dist` and its net input with `netprod`. The second layer has `compet` neurons, and calculates its

newpnn

weighted input with `dotprod` and its net inputs with `netsum`. Only the first layer has biases.

`newpnn` sets the first-layer weights to P' , and the first-layer biases are all set to $0.8326/\text{spread}$, resulting in radial basis functions that cross 0.5 at weighted inputs of $\pm \text{spread}$. The second-layer weights $W2$ are set to T .

References

Wasserman, P.D., *Advanced Methods in Neural Computing*, New York, Van Nostrand Reinhold, 1993, pp. 35–55

See Also

`sim` | `ind2vec` | `vec2ind` | `newrb` | `newrbe` | `newgrnn`

Purpose Design radial basis network

Syntax `net = newrb(P,T,goal,spread,MN,DF)`

Description Radial basis networks can be used to approximate functions. `newrb` adds neurons to the hidden layer of a radial basis network until it meets the specified mean squared error goal.

`net = newrb(P,T,goal,spread,MN,DF)` takes two of these arguments,

<code>P</code>	R-by-Q matrix of Q input vectors
<code>T</code>	S-by-Q matrix of Q target class vectors
<code>goal</code>	Mean squared error goal (default = 0.0)
<code>spread</code>	Spread of radial basis functions (default = 1.0)
<code>MN</code>	Maximum number of neurons (default is Q)
<code>DF</code>	Number of neurons to add between displays (default = 25)

and returns a new radial basis network.

The larger `spread` is, the smoother the function approximation. Too large a `spread` means a lot of neurons are required to fit a fast-changing function. Too small a `spread` means many neurons are required to fit a smooth function, and the network might not generalize well. Call `newrb` with different `spreads` to find the best value for a given problem.

Examples Here you design a radial basis network, given inputs `P` and targets `T`.

```
P = [1 2 3];
T = [2.0 4.1 5.9];
net = newrb(P,T);
```

The network is simulated for a new input.

```
P = 1.5;
```

`Y = sim(net,P)`

Algorithms

`newrb` creates a two-layer network. The first layer has `radbas` neurons, and calculates its weighted inputs with `dist` and its net input with `netprod`. The second layer has `purelin` neurons, and calculates its weighted input with `dotprod` and its net inputs with `netsum`. Both layers have biases.

Initially the `radbas` layer has no neurons. The following steps are repeated until the network's mean squared error falls below goal.

- 1** The network is simulated.
- 2** The input vector with the greatest error is found.
- 3** A `radbas` neuron is added with weights equal to that vector.
- 4** The `purelin` layer weights are redesigned to minimize error.

See Also

`sim` | `newrbe` | `newgrnn` | `newpnn`

Purpose Design exact radial basis network

Syntax `net = newrbe(P,T,spread)`

Description Radial basis networks can be used to approximate functions. `newrbe` very quickly designs a radial basis network with zero error on the design vectors.

`net = newrbe(P,T,spread)` takes two or three arguments,

<code>P</code>	<code>RxQ</code> matrix of <code>Q</code> <code>R</code> -element input vectors
<code>T</code>	<code>SxQ</code> matrix of <code>Q</code> <code>S</code> -element target class vectors
<code>spread</code>	Spread of radial basis functions (default = 1.0)

and returns a new exact radial basis network.

The larger the `spread` is, the smoother the function approximation will be. Too large a `spread` can cause numerical problems.

Examples Here you design a radial basis network given inputs `P` and targets `T`.

```
P = [1 2 3];
T = [2.0 4.1 5.9];
net = newrbe(P,T);
```

The network is simulated for a new input.

```
P = 1.5;
Y = sim(net,P)
```

Algorithms `newrbe` creates a two-layer network. The first layer has `radbas` neurons, and calculates its weighted inputs with `dist` and its net input with `netprod`. The second layer has `purelin` neurons, and calculates its weighted input with `dotprod` and its net inputs with `netsum`. Both layers have biases.

newrbe

`newrbe` sets the first-layer weights to P' , and the first-layer biases are all set to $0.8326/\text{spread}$, resulting in radial basis functions that cross 0.5 at weighted inputs of $\pm \text{spread}$.

The second-layer weights $IW\{2,1\}$ and biases $b\{2\}$ are found by simulating the first-layer outputs $A\{1\}$ and then solving the following linear expression:

$$[W\{2,1\} \ b\{2\}] * [A\{1\}; \text{ones}] = T$$

See Also

`sim` | `newrb` | `newgrnn` | `newpnn`

Purpose	Neural network fitting tool
Syntax	<code>nftool</code>
Description	<code>nftool</code> opens the neural network fitting tool GUI.
Algorithms	<code>nftool</code> leads you through solving a data fitting problem, solving it with a two-layer feed-forward network trained with Levenberg-Marquardt.
See Also	<code>nntool</code>

nncell2mat

Purpose Combine neural network cell data into matrix

Syntax `[y,i,j] nncell2mat(x)`

Description `[y,i,j] nncell2mat(x)` takes a cell array of matrices and returns,

`y` Cell array formed by concatenating matrices

`i` Array of row sizes

`ji` Array of column sizes

The row and column sizes returned by `nncell2mat` can be used to convert the returned matrix back into a cell of matrices with `mat2cell`.

Examples Here neural network data is converted to a matrix and back.

```
c = {rands(2,3) rands(2,3); rands(5,3) rands(5,3)};
[m,i,j] = nncell2mat(c)
c3 = mat2cell(m,i,j)
```

See Also `nndata` | `nnsz`

Purpose Cross correlation between neural network time series

Syntax `nncorr(a,b,maxlag,'flag')`

Description `nncorr(a,b,maxlag,'flag')` takes these arguments,

<code>a</code>	Matrix or cell array, with columns interpreted as timesteps, and having a total number of matrix rows of N .
<code>b</code>	Matrix or cell array, with columns interpreted as timesteps, and having a total number of matrix rows of M .
<code>maxlag</code>	Maximum number of time lags
<code>flag</code>	Type of normalization (default = 'none')

and returns an N -by- M cell array where each $\{i, j\}$ element is a $2*\text{maxlag}+1$ length row vector formed from the correlations of a elements (i.e., matrix row) i and b elements (i.e., matrix column) j .

If a and b are specified with row vectors, the result is returned in matrix form.

The options for the normalization *flag* are:

- 'biased' — scales the raw cross-correlation by $1/N$.
- 'unbiased' — scales the raw correlation by $1/(N-\text{abs}(k))$, where k is the index into the result.
- 'coeff' — normalizes the sequence so that the correlations at zero lag are 1.0.
- 'none' — no scaling. This is the default.

Examples

Here the autocorrelation of a random 1-element, 1-sample, 20-timestep signal is calculated with a maximum lag of 10.

nncorr

```
a = nndata(1,1,20)
aa = nncorr(a,a,10)
```

Here the cross-correlation of the first signal with another random 2-element signal are found, with a maximum lag of 8.

```
b = nndata(2,1,20)
ab = nncorr(a,b,8)
```

See Also

[confusion](#) | [regression](#)

Purpose Create neural network data

Syntax `nndata(N,Q,TS,v)`

Description `nndata(N,Q,TS,v)` takes these arguments,

<code>N</code>	Vector of <code>M</code> element sizes
<code>Q</code>	Number of samples
<code>TS</code>	Number of timesteps
<code>v</code>	Scalar value

and returns an `M`-by-`TS` cell array where each row `i` has `N(i)`-by-`Q` sized matrices of value `v`. If `v` is not specified, random values are returned.

You can access subsets of neural network data with `getelements`, `getsamples`, `gettimesteps`, and `getsignals`.

You can set subsets of neural network data with `setelements`, `setsamples`, `settimesteps`, and `setsignals`.

You can concatenate subsets of neural network data with `catelements`, `catsamples`, `cattimesteps`, and `catsignals`.

Examples

Here four samples of five timesteps, for a 2-element signal consisting of zero values is created:

```
x = nndata(2,4,5,0)
```

To create random data with the same dimensions:

```
x = nndata(2,4,5)
```

Here static (1 timestep) data of 12 samples of 4 elements is created.

```
x = nndata(4,12)
```

nndata

See Also

[nnsim](#) | [tonndata](#) | [fromnndata](#) | [nndata2sim](#) | [sim2nndata](#)

Purpose	Format neural data for efficient GPU training or simulation
Syntax	<pre>nndata2gpu(x) [Y,Q,N,TS] = nndata2gpu(X) nndata2gpu(X,PRECISION)</pre>
Description	<p>nndata2gpu requires Parallel Computing Toolbox™.</p> <p>nndata2gpu(x) takes an N-by-Q matrix X of Q N-element column vectors, and returns it in a form for neural network training and simulation on the current GPU device.</p> <p>The N-by-Q matrix becomes a QQ-by-N gpuArray where QQ is Q rounded up to the next multiple of 32. The extra rows (Q+1):QQ are filled with NaN values. The gpuArray has the same precision ('single' or 'double') as X.</p> <p>[Y,Q,N,TS] = nndata2gpu(X) can also take an M-by-TS cell array of M signals over TS time steps. Each element of X{i,ts} should be an Ni-by-Q matrix of Q Ni-element vectors, representing the ith signal vector at time step ts, across all Q time series. In this case, the gpuArray Y returned is QQ-by-(sum(Ni)*TS). Dimensions Ni, Q, and TS are also returned so they can be used with gpu2nndata to perform the reverse formatting.</p> <p>nndata2gpu(X,PRECISION) specifies the default precision of the gpuArray, which can be 'double' or 'single'.</p>
Examples	<p>Copy a matrix to the GPU and back:</p> <pre>x = rand(5,6) [y,q] = nndata2gpu(x) x2 = gpu2nndata(y,q)</pre> <p>Copy neural network cell array data, representing four time series, each consisting of five time steps of 2-element and 3-element signals:</p> <pre>x = nndata([2;3],4,5) [y,q,n,ts] = nndata2gpu(x)</pre>

nndata2gpu

```
x2 = gpu2nndata(y,q,n,ts)
```

See Also

[gpu2nndata](#)

Purpose Convert neural network data to Simulink time series

Syntax `nndata2sim(x,i,q)`

Description `nndata2sim(x,i,q)` takes these arguments,

<code>x</code>	Neural network data
<code>i</code>	Index of signal (default = 1)
<code>q</code>	Index of sample (default = 1)

and returns time series `q` of signal `i` as a Simulink time series structure.

Examples Here random neural network data is created with two signals having 4 and 3 elements respectively, over 10 timesteps. Three such series are created.

```
x = nndata([4;3],3,10);
```

Now the second signal of the first series is converted to Simulink form.

```
y_2_1 = nndata2sim(x,2,1)
```

See Also `nndata` | `sim2nndata` | `nnsim`

nnsz

Purpose Number of neural data elements, samples, timesteps, and signals

Syntax `[N,Q,TS,M] = nnsz(X)`

Description `[N,Q,TS,M] = nnsz(X)` takes neural network data `x` and returns,

<code>N</code>	Vector containing the number of element sizes for each of <code>M</code> signals
<code>Q</code>	Number of samples
<code>TS</code>	Number of timesteps
<code>M</code>	Number of signals

If `X` is a matrix, `N` is the number of rows of `X`, `Q` is the number of columns, and both `TS` and `M` are 1.

If `X` is a cell array, `N` is an `Sx1` vector, where `M` is the number of rows in `X`, and `N(i)` is the number of rows in `X{i,1}`. `Q` is the number of columns in the matrices in `X`.

Examples

This code gets the dimensions of matrix data:

```
x = [1 2 3; 4 7 4]
[n,q,ts,s] = nnsz(x)
```

This code gets the dimensions of cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
[n,q,ts,s] = nnsz(x)
```

See Also

`nndata` | `numelements` | `numsamples` | `numsignals` | `numtimesteps`

Purpose	Neural network getting started GUI
Syntax	<code>nnstart</code>
Description	<code>nnstart</code> opens a window with launch buttons for neural network fitting, pattern recognition, clustering and time series wizards. It also provides links to lists of data sets, examples, and other useful information for getting started.
See Also	<code>nctool</code> <code>nftool</code> <code>nprtool</code> <code>ntstool</code>

nntool

Purpose Open Network/Data Manager

Syntax nntool

Description nntool opens the Network/Data Manager window, which allows you to import, create, use, and export neural networks and data.

Purpose Neural network training tool

Syntax `nntraintool`

Description `nntraintool` opens the neural network training GUI.

This function can be called to make the training GUI visible before training has occurred, after training if the window has been closed, or just to bring the training GUI to the front.

Network training functions handle all activity within the training window.

To access additional useful plots, related to the current or last network trained, during or after training, click their respective buttons in the training window.

noloop

Purpose Remove neural network open- and closed-loop feedback

Syntax `net = noloop(net)`

Description `net = noloop(net)` takes a neural network and returns the network with open- and closed-loop feedback removed.

For outputs `i`, where `net.outputs{i}.feedbackMode` is 'open', the feedback mode is set to 'none', `outputs{i}.feedbackInput` is set to the empty matrix, and the associated network input is deleted.

For outputs `i`, where `net.outputs{i}.feedbackMode` is 'closed', the feedback mode is set to 'none'.

Examples Here a NARX network is designed. The NARX network has a standard input and an open-loop feedback output to an associated feedback input.

```
[X,T] = simplenarx_dataset;
net = narxnet(1:2,1:2,20);
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);
net = train(net,Xs,Ts,Xi,Ai);
view(net)
Y = net(Xs,Xi,Ai)
```

Now the network is converted to no loop form. The output and second input are no longer associated.

```
net = noloop(net);
view(net)
[Xs,Xi,Ai] = preparets(net,X,T);
Y = net(Xs,Xi,Ai)
```

See Also `closeloop` | `openloop`

Purpose	Normalize columns of matrix
Syntax	normc(M)
Description	normc(M) normalizes the columns of M to a length of 1.
Examples	<pre>m = [1 2; 3 4]; normc(m) ans = 0.3162 0.4472 0.9487 0.8944</pre>
See Also	normr

normprod

Purpose Normalized dot product weight function

Syntax

```
Z = normprod(W,P,FP)
dim = normprod('size',S,R,FP)
dw = normprod('dz_dw',W,P,Z,FP)
```

Description normprod is a weight function. Weight functions apply weights to an input to get weighted inputs.

Z = normprod(W,P,FP) takes these inputs,

W	S-by-R weight matrix
P	R-by-Q matrix of Q input (column) vectors
FP	Row cell array of function parameters (optional, ignored)

and returns the S-by-Q matrix of normalized dot products.

dim = normprod('size',S,R,FP) takes the layer dimension S, input dimension R, and function parameters, and returns the weight size [S-by-R].

dw = normprod('dz_dw',W,P,Z,FP) returns the derivative of Z with respect to W.

Examples Here you define a random weight matrix W and input vector P and calculate the corresponding weighted input Z.

```
W = rand(4,3);
P = rand(3,1);
Z = normprod(W,P)
```

Network Use

You can create a standard network that uses `normprod` by calling `newgrnn`.

To change a network so an input weight uses `normprod`, set `net.inputWeight{i,j}.weightFcn` to `'normprod'`. For a layer weight, set `net.layerWeight{i,j}.weightFcn` to `'normprod'`.

In either case, call `sim` to simulate the network with `normprod`. See `newgrnn` for simulation examples.

Algorithms

`normprod` returns the dot product normalized by the sum of the input vector elements.

$$z = w * p / \text{sum}(p)$$

See Also

`dotprod`

normr

Purpose Normalize rows of matrix

Syntax normr(M)

Description normr(M) normalizes the rows of M to a length of 1.

Examples

```
m = [1 2; 3 4];
normr(m)
ans =
    0.4472    0.8944
    0.6000    0.8000
```

See Also normc

Purpose	Neural network pattern recognition tool
Syntax	nprtool
Description	nprtool opens the neural network pattern-recognition GUI.
Algorithms	nprtool leads you through solving a pattern-recognition classification problem using a two-layer feed-forward patternnet network with sigmoid output neurons.
See Also	nctool nftool ntstool

ntstool

Purpose Neural network time series tool

Syntax `ntstool`
`ntstool('close')`

Description `ntstool` opens the neural network time series wizard and leads you through solving a fitting problem using a two-layer feed-forward network.

`ntstool('close')` closes the wizard.

See Also `nctool` | `nftool` | `nprtool`

Purpose Numeric two-point network derivative function

Syntax num2deriv('dperf_dwb',net,X,T,Xi,Ai,EW)
num2deriv('de_dwb',net,X,T,Xi,Ai,EW)

Description This function calculates derivatives using the two-point numeric derivative rule.

$$\frac{dy}{dx} = \frac{y(x + dx) - y(x)}{dx}$$

This function is much slower than the analytical (non-numerical) derivative functions, but is provided as a means of checking the analytical derivative functions. The other numerical function, num5deriv, is slower but more accurate.

num2deriv('dperf_dwb',net,X,T,Xi,Ai,EW) takes these arguments,

net	Neural network
X	Inputs, an RxQ matrix (or NxTS cell array of RixQ matrices)
T	Targets, an SxQ matrix (or MxTS cell array of SixQ matrices)
Xi	Initial input delay states (optional)
Ai	Initial layer delay states (optional)
EW	Error weights (optional)

and returns the gradient of performance with respect to the network's weights and biases, where R and S are the number of input and output elements and Q is the number of samples (and N and M are the number of input and output signals, Ri and Si are the number of each input and outputs elements, and TS is the number of timesteps).

num2deriv('de_dwb',net,X,T,Xi,Ai,EW) returns the Jacobian of errors with respect to the network's weights and biases.

num2deriv

Examples

Here a feedforward network is trained and both the gradient and Jacobian are calculated.

```
[x,t] = simplefit_dataset;  
net = feedforwardnet(20);  
net = train(net,x,t);  
y = net(x);  
perf = perform(net,t,y);  
dwb = num2deriv('dperf_dwb',net,x,t)
```

See Also

[bttderiv](#) | [defaultderiv](#) | [fpderiv](#) | [num5deriv](#) | [staticderiv](#)

Purpose Numeric five-point stencil neural network derivative function

Syntax num5deriv('dperf_dwb',net,X,T,Xi,Ai,EW)
num5deriv('de_dwb',net,X,T,Xi,Ai,EW)

Description This function calculates derivatives using the five-point numeric derivative rule.

$$y_1 = y(x + 2dx)$$

$$y_2 = y(x + dx)$$

$$y_3 = y(x - dx)$$

$$y_4 = y(x - 2dx)$$

$$\frac{dy}{dx} = \frac{y_1 - 8y_2 + 8y_3 - y_4}{dx}$$

This function is much slower than the analytical (non-numerical) derivative functions, but is provided as a means of checking the analytical derivative functions. The other numerical function, num2deriv, is faster but less accurate.

num5deriv('dperf_dwb',net,X,T,Xi,Ai,EW) takes these arguments,

net	Neural network
X	Inputs, an RxQ matrix (or NxTS cell array of RixQ matrices)
T	Targets, an SxQ matrix (or MxTS cell array of SixQ matrices)
Xi	Initial input delay states (optional)
Ai	Initial layer delay states (optional)
EW	Error weights (optional)

and returns the gradient of performance with respect to the network's weights and biases, where R and S are the number of input and output

num5deriv

elements and Q is the number of samples (and N and M are the number of input and output signals, R_i and S_i are the number of each input and outputs elements, and TS is the number of timesteps).

`num5deriv('de_dwb',net,X,T,Xi,Ai,EW)` returns the Jacobian of errors with respect to the network's weights and biases.

Examples

Here a feedforward network is trained and both the gradient and Jacobian are calculated.

```
[x,t] = simplefit_dataset;
net = feedforwardnet(20);
net = train(net,x,t);
y = net(x);
perf = perform(net,t,y);
dwb = num5deriv('dperf_dwb',net,x,t)
```

See Also

[bttderiv](#) | [defaultderiv](#) | [fpderiv](#) | [num2deriv](#) | [staticderiv](#)

Purpose Number of elements in neural network data

Syntax `numelements(x)`

Description `numelements(x)` takes neural network data `x` in matrix or cell array form, and returns the number of elements in each signal.

If `x` is a matrix the result is the number of rows of `x`.

If `x` is a cell array the result is an `S`-by-1 vector, where `S` is the number of signals (i.e., rows of `X`), and each element `S(i)` is the number of elements in each signal `i` (i.e., rows of `x{i,1}`).

Examples This code calculates the number of elements represented by matrix data:

```
x = [1 2 3; 4 7 4]
n = numelements(x)
```

This code calculates the number of elements represented by cell data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
n = numelements(x)
```

See Also `nndata` | `nnsizes` | `getelements` | `setelements` | `catelements` | `numsamples` | `numsignals` | `numtimesteps`

numfinite

Purpose Number of finite values in neural network data

Syntax `numfinite(x)`

Description `numfinite(x)` takes a matrix or cell array of matrices and returns the number of finite elements in it.

Examples

```
x = [1 2; 3 NaN]
n = numfinite(x)

x = {[1 2; 3 NaN] [5 NaN; NaN 8]}
n = numfinite(x)
```

See Also `numnan` | `nndata` | `nnsz`

Purpose Number of NaN values in neural network data

Syntax `numnan(x)`

Description `numnan(x)` takes a matrix or cell array of matrices and returns the number of NaN elements in it.

Examples `x = [1 2; 3 NaN]`
 `n = numnan(x)`

`x = {[1 2; 3 NaN] [5 NaN; NaN 8]}`
`n = numnan(x)`

See Also `numnan` | `nndata` | `nnsz`

numsamples

Purpose Number of samples in neural network data

Syntax `numsamples(x)`

Description `numsamples(x)` takes neural network data `x` in matrix or cell array form, and returns the number of samples.

If `x` is a matrix, the result is the number of columns of `x`.

If `x` is a cell array, the result is the number of columns of the matrices in `x`.

Examples This code calculates the number of samples represented by matrix data:

```
x = [1 2 3; 4 7 4]
n = numsamples(x)
```

This code calculates the number of samples represented by cell data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
n = numsamples(x)
```

See Also `nndata` | `nnsample` | `getsamples` | `setsamples` | `catsamples` | `numelements` | `numsignals` | `numtimesteps`

Purpose Number of signals in neural network data

Syntax `numsignals(x)`

Description `numsignals(x)` takes neural network data `x` in matrix or cell array form, and returns the number of signals.

If `x` is a matrix, the result is 1.

If `x` is a cell array, the result is the number of rows in `x`.

Examples This code calculates the number of signals represented by matrix data:

```
x = [1 2 3; 4 7 4]
n = numsignals(x)
```

This code calculates the number of signals represented by cell data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
n = numsignals(x)
```

See Also `nndata` | `nnsizes` | `getsignals` | `setsignals` | `catsignals` | `numelements` | `numsamples` | `numtimesteps`

numtimesteps

Purpose Number of time steps in neural network data

Syntax `numtimesteps(x)`

Description `numtimesteps(x)` takes neural network data `x` in matrix or cell array form, and returns the number of signals.

If `x` is a matrix, the result is 1.

If `x` is a cell array, the result is the number of columns in `x`.

Examples This code calculates the number of time steps represented by matrix data:

```
x = [1 2 3; 4 7 4]
n = numtimesteps(x)
```

This code calculates the number of time steps represented by cell data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
n = numtimesteps(x)
```

See Also `nndata` | `nnsizes` | `gettimesteps` | `settimesteps` | `cattimesteps` | `numelements` | `numsamples` | `numsignals`

Purpose	Convert neural network closed-loop feedback to open loop
Syntax	<code>net = openloop(net)</code>
Description	<code>net = openloop(net)</code> takes a neural network and opens any closed-loop feedback. For each feedback output <code>i</code> whose property <code>net.outputs{i}.feedbackMode</code> is 'closed', it replaces its associated feedback layer weights with a new input and input weight connections. The <code>net.outputs{i}.feedbackMode</code> property is set to 'open', and the <code>net.outputs{i}.feedbackInput</code> property is set to the index of the new input. Finally, the value of <code>net.outputs{i}.feedbackDelays</code> is subtracted from the delays of the feedback input weights (i.e., to the delays values of the replaced layer weights).
Examples	<p>Here a NARX network is designed in open-loop form and then converted to closed-loop form, then converted back.</p> <pre>[X,T] = simplenarx_dataset; net = narxnet(1:2,1:2,10); [Xs,Xi,Ai,Ts] = preparets(net,X,{},T); net = train(net,Xs,Ts,Xi,Ai); view(net) Yopen = net(Xs,Xi,Ai) net = closeloop(net) view(net) [Xs,Xi,Ai,Ts] = preparets(net,X,{},T); Yclosed = net(Xs,Xi,Ai); net = openloop(net) view(net) [Xs,Xi,Ai,Ts] = preparets(net,X,{},T); Yopen = net(Xs,Xi,Ai)</pre>
See Also	<code>closeloop</code> <code>noloop</code>

patternnet

Purpose Pattern recognition network

Syntax `patternnet(hiddenSizes,trainFcn)`

Description Pattern recognition networks are feedforward networks that can be trained to classify inputs according to target classes. The target data for pattern recognition networks should consist of vectors of all zero values except for a 1 in element *i*, where *i* is the class they are to represent.

`patternnet(hiddenSizes,trainFcn)` takes these arguments,

<code>hiddenSizes</code>	Row vector of one or more hidden layer sizes (default = 10)
<code>trainFcn</code>	Training function (default = 'trainscg')

and returns a pattern recognition neural network.

Examples Here a pattern recognition network is designed to classify iris flowers.

```
[x,t] = iris_dataset;
net = patternnet(10)
net = train(net,x,t);
view(net)
y = net(x);
perf = perform(net,t,y)
classes = vec2ind(y)
```

See Also `lvqnet` | `competlayer` | `selforgmap` | `nprtool`

Purpose Perceptron

Syntax `perceptron(hardlimitTF,perceptronLF)`

Syntax

Description

Perceptrons are simple single-layer binary classifiers, which divide the input space with a linear decision boundary.

Perceptrons are provide for historical interest. For much better results use `patternnet`, which can solve non-linearly separable problems. Sometimes when people refer to perceptrons they are referring to feed-forward pattern recognition networks, such as `patternnet`. But the original perceptron, described here, can solve only very simple problems.

Perceptrons can learn to solve a narrow class of classification problems. Their significance is they have a simple learning rule and were one of the first neural networks to reliably solve a given class of problems.

`perceptron(hardlimitTF,perceptronLF)` takes these arguments,

<code>hardlimitTF</code>	Hard limit transfer function (default = 'hardlim')
<code>perceptronLF</code>	Perceptron learning rule (default = 'learnp')

and returns a perceptron.

In addition to the default hard limit transfer functions, perceptrons can be created with the `hardlims` transfer function. The other option for the perceptron learning rule is `learnpn`.

Examples

Here a perceptron is used to solve a very simple classification logical-OR problem.

```
x = [0 0 1 1; 0 1 0 1];
```

perceptron

```
t = [0 1 1 1];  
net = perceptron;  
net = train(net,x,t);  
view(net)  
y = net(x);
```

See Also

[preparets](#) | [removedelay](#) | [timedelaynet](#) | [narnet](#) | [narxnet](#)

Purpose Calculate network performance

Syntax `perform(net,t,y,ew)`

Description `perform(net,t,y,ew)` takes these arguments,

<code>net</code>	Neural network
<code>t</code>	Target data
<code>y</code>	Output data
<code>ew</code>	Error weights (default = {1})

and returns network performance calculated according to the `net.performFcn` and `net.performParam` property values.

The target and output data must have the same dimensions. The error weights may be the same dimensions as the targets, in the most general case, but may also have any of its dimension be 1. This gives the flexibility of defining error weights across any dimension desired.

Error weights can be defined by sample, output element, time step, or network output:

```
ew = [1.0 0.5 0.7 0.2]; % Across 4 samples
ew = [0.1; 0.5; 1.0]; % Across 3 elements
ew = {0.1 0.2 0.3 0.5 1.0}; % Across 5 timesteps
ew = {1.0; 0.5}; % Across 2 outputs
```

The may also be defined across any combination, such as across two time-series (i.e. two samples) over four timesteps.

```
ew = {[0.5 0.4],[0.3 0.5],[1.0 1.0],[0.7 0.5]};
```

In the general case, error weights may have exactly the same dimensions as targets, in which case each target value will have an associated error weight.

perform

The default error weight treats all errors the same.

```
ew = {1}
```

Examples

Here a simple fitting problem is solved with a feed-forward network and its performance calculated.

```
[x,t] = simplefit_dataset;  
net = feedforwardnet(20);  
net = train(net,x,t);  
y = net(x);  
perf = perform(net,t,y)
```

See Also

[train](#) | [configure](#) | [init](#)

Purpose

Plot classification confusion matrix

Syntax

```
plotconfusion(targets,outputs)
plotconfusion(targets1,outputs1,'name1',...)
```

Description

plotconfusion(targets,outputs) displays the classification confusion grid.

plotconfusion(targets1,outputs1,'name1',...) displays a series of plots.

Examples

```
load simpleclass_dataset
net = patternnet(20);
net = train(net,simpleclassInputs,simpleclassTargets);
simpleclassOutputs = sim(net,simpleclassInputs);
plotconfusion(simpleclassTargets,simpleclassOutputs);
```

plotep

Purpose Plot weight-bias position on error surface

Syntax H= plotep(W,B,E)
H = plotep(W,B,E,H)

Description plotep is used to show network learning on a plot already created by plotes.

H= plotep(W,B,E) takes these arguments,

W	Current weight value
B	Current bias value
E	Current error

and returns a vector H, containing information for continuing the plot.

H = plotep(W,B,E,H) continues plotting using the vector H returned by the last call to plotep.

H contains handles to dots plotted on the error surface, so they can be deleted next time, as well as points on the error contour, so they can be connected.

See Also errsurf | plotes

Purpose Plot autocorrelation of error time series

Syntax `ploterrcorr(error)`
`ploterrcorr(errors, 'outputIndex', outIdx)`

Description `ploterrcorr(error)` takes an error time series and plots the autocorrelation of errors across varying lags.

`ploterrcorr(errors, 'outputIndex', outIdx)` uses the optional property name/value pair to define which output error autocorrelation is plotted. The default is 1.

Examples Here a NARX network is used to solve a time series problem.

```
[X,T] = simplenarx_dataset;  
net = narxnet(1:2,20);  
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);  
net = train(net,Xs,Ts,Xi,Ai);  
Y = net(Xs,Xi,Ai);  
E = gsubtract(Ts,Y);  
ploterrcorr(E)
```

See Also `plotinerrcorr` | `plotresponse`

ploterrhist

Purpose

Plot error histogram

Syntax

```
ploterrhist(e)  
ploterrhist(e1,'name1',e2,'name2',...)  
ploterrhist(...,'bins',bins)
```

Description

`ploterrhist(e)` plots a histogram of error values `e`.

`ploterrhist(e1,'name1',e2,'name2',...)` takes any number of errors and names and plots each pair.

`ploterrhist(...,'bins',bins)` takes an optional property name/value pair which defines the number of bins to use in the histogram plot. The default is 20.

Examples

Here a feedforward network is used to solve a simple fitting problem:

```
[x,t] = simplefit_dataset;  
net = feedforwardnet(20);  
net = train(net,x,t);  
y = net(x);  
e = t - y;  
ploterrhist(e,'bins',30)
```

See Also

`plotconfusion` | `ploterrcorr` | `plotinerrcorr`

Purpose Plot error surface of single-input neuron

Syntax `plots(WV,BV,ES,V)`

Description `plots(WV,BV,ES,V)` takes these arguments,

WV	1-by-N row vector of values of W
BV	1-by-M row vector of values of B
ES	M-by-N matrix of error vectors
V	View (default = [-37.5, 30])

and plots the error surface with a contour underneath.

Calculate the error surface ES with `errsurf`.

Examples

```
p = [3 2];
t = [0.4 0.8];
wv = -4:0.4:4; bv = wv;
ES = errsurf(p,t,wv,bv,'logsig');
plots(wv,bv,ES,[60 30])
```

See Also `errsurf`

plotfit

Purpose Plot function fit

Syntax `plotfit(NET,INPUTS,TARGETS)`
`plotfit(targets1,inputs1,'name1',...)`

Description `plotfit(NET,INPUTS,TARGETS)` plots the output function of a network across the range of the inputs `INPUTS` and also plots target `TARGETS` and output data points associated with values in `INPUTS`. Error bars show the difference between outputs and `INPUTS`.

The plot appears only for networks with one input.

Only the first output/targets appear if the network has more than one output.

`plotfit(targets1,inputs1,'name1',...)` displays a series of plots.

Examples

```
load simplefit_dataset
net = fitnet(20);
[net,tr] = train(net,simplefitInputs,simplefitTargets);
plotfit(net,simplefitInputs,simplefitTargets);
```

See Also `plottrainstate`

Purpose Plot input to error time-series cross correlation

Syntax

```
plotinerrcorr(x,e)
plotinerrcorr(...,'inputIndex',inputIndex)
plotinerrcorr(...,'outputIndex',outputIndex)
```

Description `plotinerrcorr(x,e)` takes an input time series `x` and an error time series `e`, and plots the autocorrelation of inputs to errors across varying lags.

`plotinerrcorr(...,'inputIndex',inputIndex)` optionally defines which input element is being correlated and plotted. The default is 1.

`plotinerrcorr(...,'outputIndex',outputIndex)` optionally defines which error element is being correlated and plotted. The default is 1.

Examples Here a NARX network is used to solve a time series problem.

```
[X,T] = simplenarx_dataset;
net = narxnet(1:2,20);
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);
net = train(net,Xs,Ts,Xi,Ai);
Y = net(Xs,Xi,Ai);
E = gsubtract(Ts,Y);
ploterrcorr(E)
plotinerrcorr(Xs,E)
```

See Also `ploterrcorr` | `plotresponse` | `ploterrhist`

plotpc

Purpose Plot classification line on perceptron vector plot

Syntax `plotpc(W,B)`
`plotpc(W,B,H)`

Description `plotpc(W,B)` takes these inputs,

W S-by-R weight matrix (R must be 3 or less)

B S-by-1 bias vector

and returns a handle to a plotted classification line.

`plotpc(W,B,H)` takes an additional input,

H Handle to last plotted line

and deletes the last line before plotting the new one.

This function does not change the current axis and is intended to be called after `plotpv`.

Examples The code below defines and plots the inputs and targets for a perceptron:

```
p = [0 0 1 1; 0 1 0 1];  
t = [0 0 0 1];  
plotpv(p,t)
```

The following code creates a perceptron with inputs ranging over the values in P, assigns values to its weights and biases, and plots the resulting classification line.

```
net = newp(minmax(p),1);  
net.iw{1,1} = [-1.2 -0.5];  
net.b{1} = 1;  
plotpc(net.iw{1,1},net.b{1})
```

See Also plotpv

plotperform


Purpose Plot network performance

Syntax plotperform(TR)

Description plotperform(TR) plots the training, validation, and test performances given the training record TR returned by the function train.

Examples

```
[x,t] = house_dataset;  
net = feedforwardnet(10);  
[net,tr] = train(net,x,t);  
plotperform(tr)
```

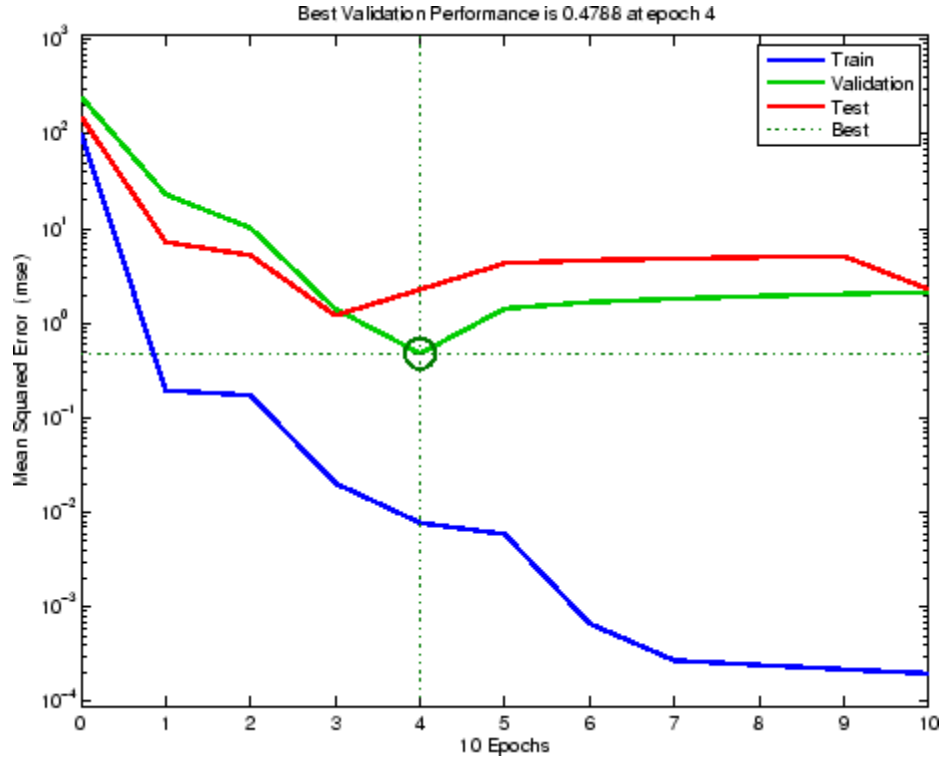

See Also `plottrainstate`

plotpv

Purpose Plot perceptron input/target vectors

Syntax `plotpv(P,T)`
`plotpv(P,T,V)`

Description `plotpv(P,T)` takes these inputs,

`P` R-by-Q matrix of input vectors (R must be 3 or less)

`T` S-by-Q matrix of binary target vectors (S must be 3 or less)

and plots column vectors in `P` with markers based on `T`.

`plotpv(P,T,V)` takes an additional input,

`V` Graph limits = [`x_min` `x_max` `y_min` `y_max`]

and plots the column vectors with limits set by `V`.

Examples The code below defines and plots the inputs and targets for a perceptron:

```
p = [0 0 1 1; 0 1 0 1];  
t = [0 0 0 1];  
plotpv(p,t)
```


The following code creates a perceptron with inputs ranging over the values in `P`, assigns values to its weights and biases, and plots the resulting classification line.

```
net = newp(minmax(p),1);  
net.iw{1,1} = [-1.2 -0.5];  
net.b{1} = 1;  
plotpc(net.iw{1,1},net.b{1})
```

See Also `plotpc`

Purpose	Plot linear regression
Syntax	<code>plotregression(targets,outputs)</code> <code>plotregression(targs1,outs1,'name1',targs2,outs2,'name2',...)</code>
Description	<code>plotregression(targets,outputs)</code> plots the linear regression of targets relative to outputs. <code>plotregression(targs1,outs1,'name1',targs2,outs2,'name2',...)</code> generates multiple plots.
Examples	<pre>[x,t] = simplefit_dataset; net = feedforwardnet(10); net = train(net,x,t); y = net(x); plotregression(t,y,'Regression')</pre>

plotregression

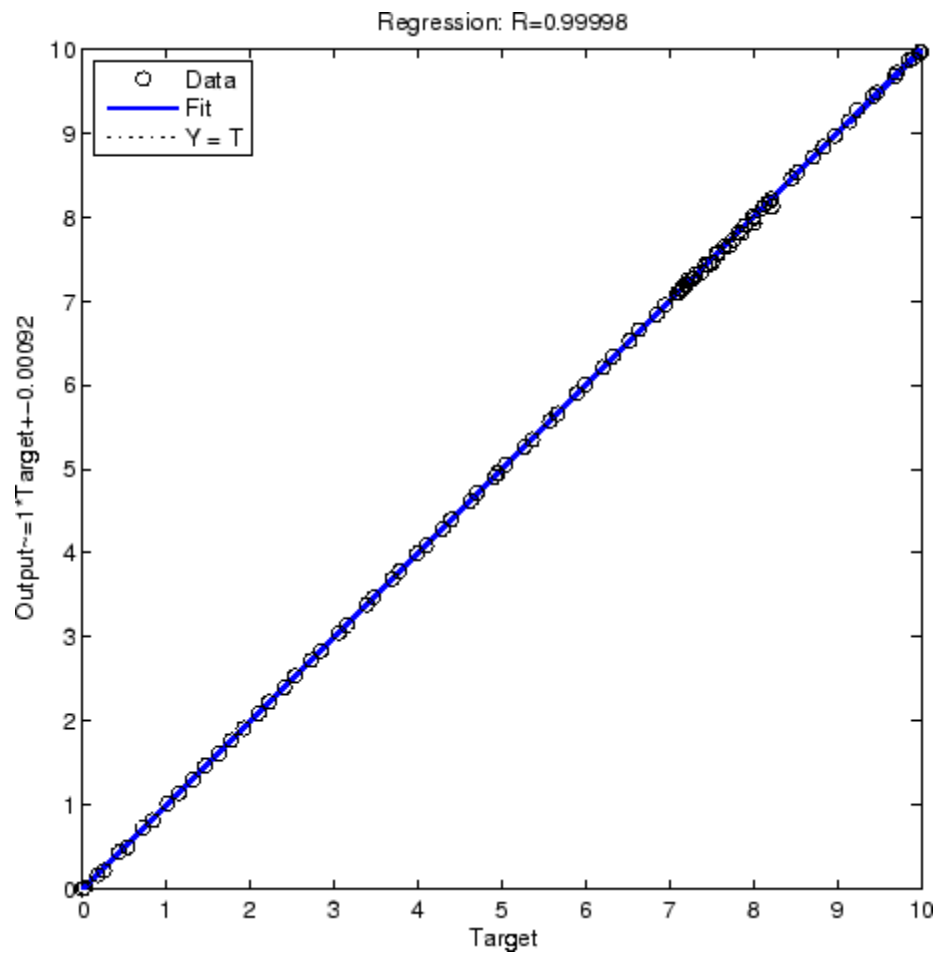

See Also `plottrainstate`

Purpose Plot dynamic network time series response

Syntax

```
plotresponse(t,y)
plotresponse(t1,'name',t2,'name2',...,y)
plotresponse(...,'outputIndex',outputIndex)
```

Description `plotresponse(t,y)` takes a target time series `t` and an output time series `y`, and plots them on the same axis showing the errors between them.

`plotresponse(t1,'name',t2,'name2',...,y)` takes multiple target/name pairs, typically defining training, validation and testing targets, and the output. It plots the responses with colors indicating the different target sets.

`plotresponse(...,'outputIndex',outputIndex)` optionally defines which error element is being correlated and plotted. The default is 1.


Examples Here a NARX network is used to solve a time series problem.

```
[X,T] = simplenarx_dataset;
net = narxnet(1:2,20);
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);
net = train(net,Xs,Ts,Xi,Ai);
Y = net(Xs,Xi,Ai);
plotresponse(Ts,Y)
```

See Also `ploterrcorr` | `plotinerrcorr` | `ploterrhist`

plotroc

Purpose	Plot receiver operating characteristic
Syntax	<code>plotroc(targets,outputs)</code> <code>plotroc(targets1,outputs2,'name1',...)</code>
Description	<code>plotroc(targets,outputs)</code> plots the receiver operating characteristic for each output class. The more each curve hugs the left and top edges of the plot, the better the classification. <code>plotroc(targets1,outputs2,'name1',...)</code> generates multiple plots.
Examples	<pre>load simplecluster_dataset net = patternnet(20); net = train(net,simpleclusterInputs,simpleclusterTargets); simpleclusterOutputs = sim(net,simpleclusterInputs); plotroc(simpleclusterTargets,simpleclusterOutputs);</pre>

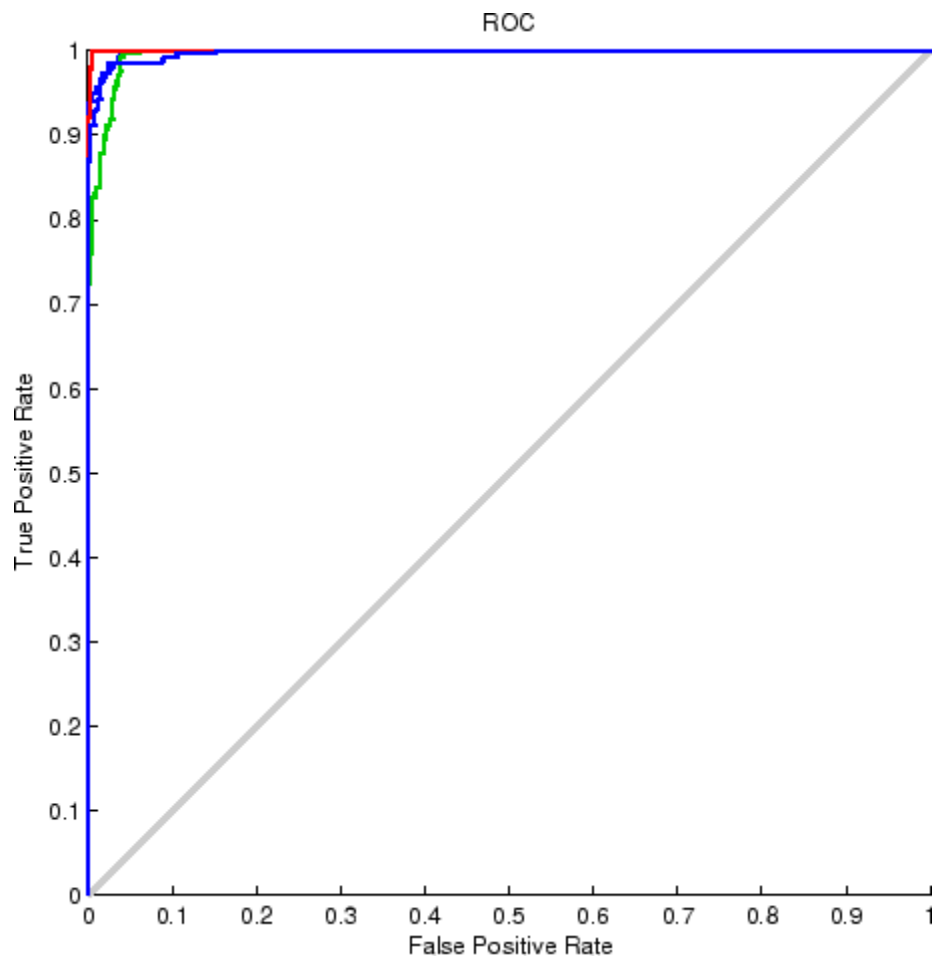

See Also

`roc`

plotsom

Purpose Plot self-organizing map

Syntax `plotsom(pos)`
`plotsom(W,D,ND)`

Description `plotsom(pos)` takes one argument,

POS N-by-S matrix of S N-dimension neural positions

and plots the neuron positions with red dots, linking the neurons within a Euclidean distance of 1.

`plotsom(W,D,ND)` takes three arguments,

W S-by-R weight matrix

D S-by-S distance matrix

ND Neighborhood distance (default = 1)

and plots the neuron's weight vectors with connections between weight vectors whose neurons are within a distance of 1.

Examples

This code generates plots of various layer topologies.

```
pos = hextop(5,6); plotsom(pos)
pos = gridtop(4,5); plotsom(pos)
pos = randtop(18,12); plotsom(pos)
pos = gridtop(4,5,2); plotsom(pos)
pos = hextop(4,4,3); plotsom(pos)
```

See `newsom` for an example of plotting a layer's weight vectors with the input vectors they map.

See Also

`initsompc` | `learnsom`

Purpose Plot self-organizing map sample hits


Syntax `plotsomhits(net,inputs)`

Description `plotsomhits(net,inputs)` plots a SOM layer, with each neuron showing the number of input vectors that it classifies. The relative number of vectors for each neuron is shown via the size of a colored patch.

Examples

```
x = iris_dataset;
net = selforgmap([5 5]);
net = train(net,x);
plotsomhits(net,x);
```

plotsomhits

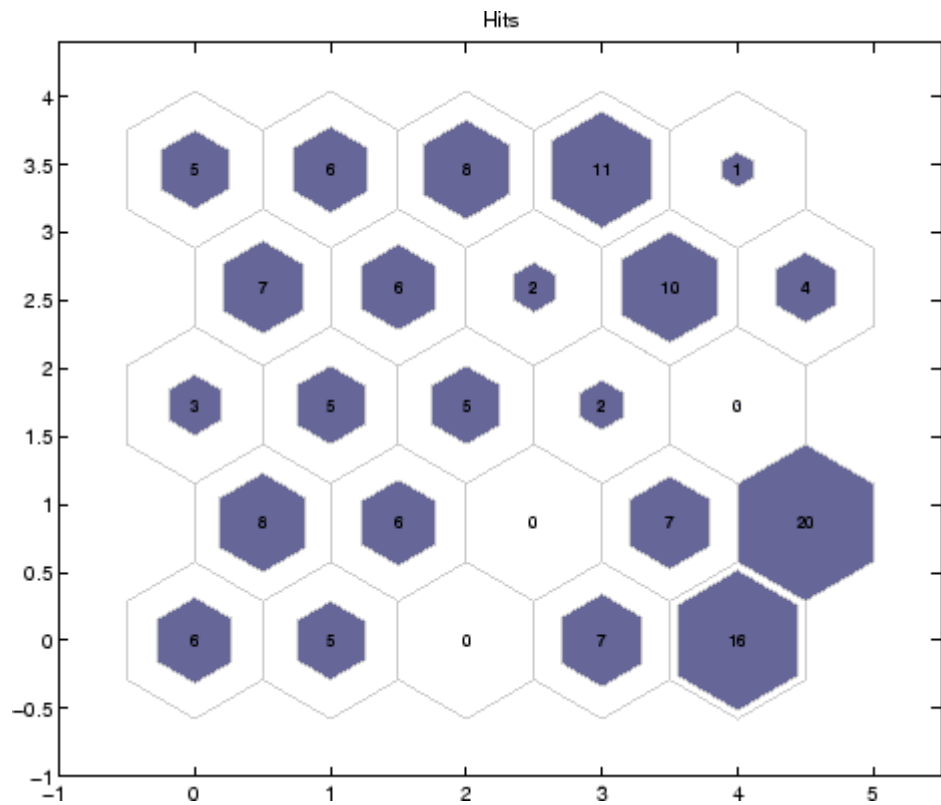

See Also

`plotsomplanes`


Purpose Plot self-organizing map neighbor connections

Syntax `plotsomnc(net)`

Description `plotsomnc(net)` plots a SOM layer showing neurons as gray-blue patches and their direct neighbor relations with red lines.

Examples

```
x = iris_dataset;  
net = selforgmap([8 8]);  
net = train(net,x);  
plotsomnc(net)
```

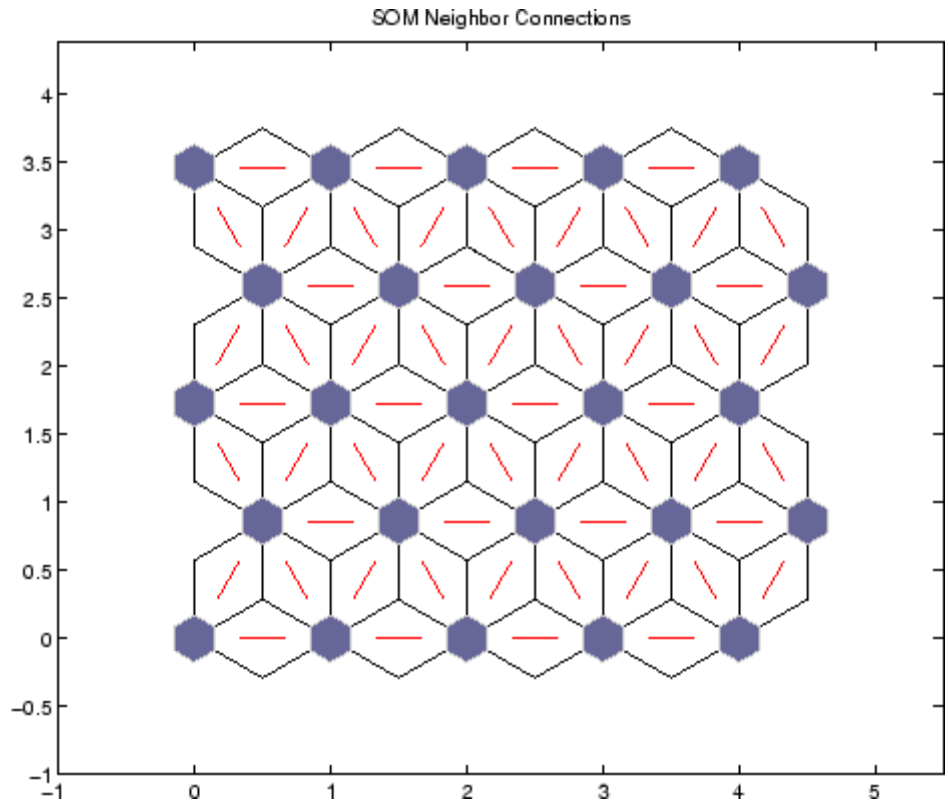

plotsomnc

See Also

`plotsomnd` | `plotsomplanes` | `plotsomhits`


Purpose Plot self-organizing map neighbor distances

Syntax `plotsomnd(net)`

Description `plotsomnd(net)` plots a SOM layer showing neurons as gray-blue patches and their direct neighbor relations with red lines. The neighbor patches are colored from black to yellow to show how close each neuron's weight vector is to its neighbors.

Examples

```
x = iris_dataset;
net = selforgmap([5 5]);
net = train(net,x);
plotsomnd(net);
```

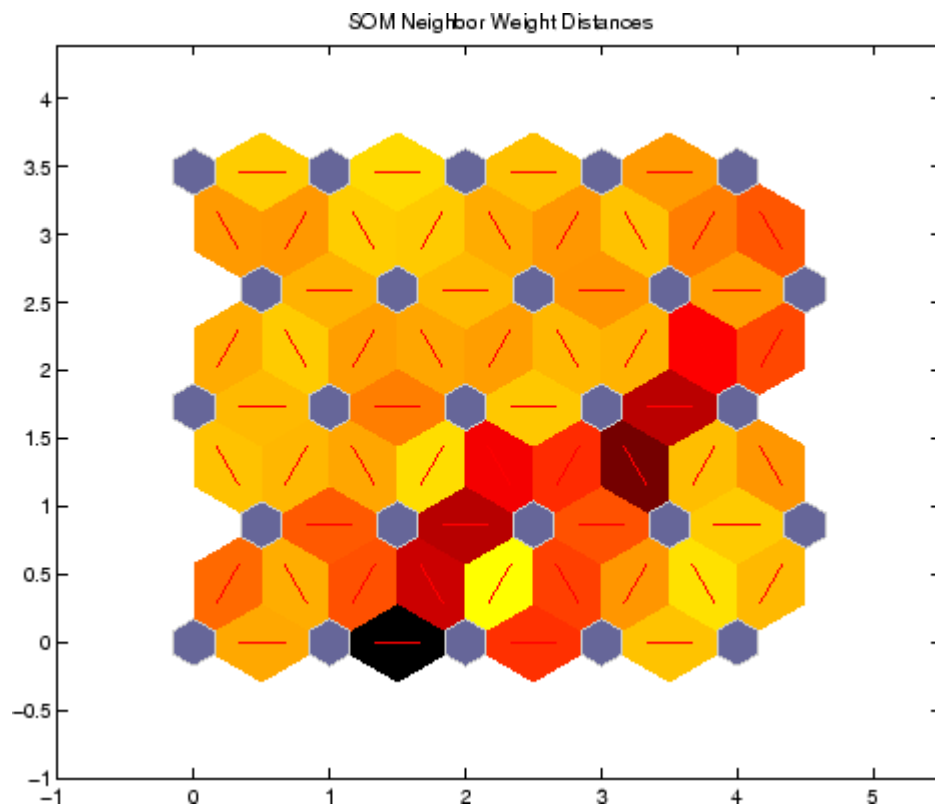

See Also

[plotsomhits](#) | [plotsomnc](#) | [plotsomplanes](#)

Purpose Plot self-organizing map weight planes

Syntax `plotsomplanes(net)`

Description `plotsomplanes(net)` generates a set of subplots. Each *i*th subplot shows the weights from the *i*th input to the layer's neurons, with the most negative connections shown as blue, zero connections as black, and the strongest positive connections as red.





The plot is only shown for layers organized in one or two dimensions.

This function can also be called with standardized plotting function arguments used by the function `train`.

Examples

```
x = iris_dataset;  
net = selforgmap([5 5]);  
net = train(net,x);  
plotsomplanes(net)
```

plotsomplanes

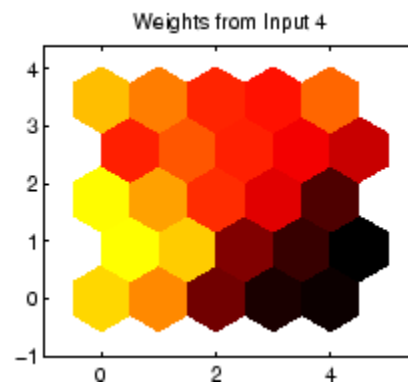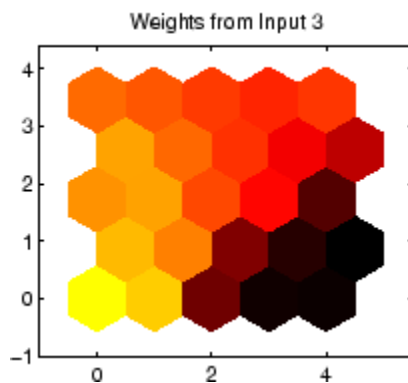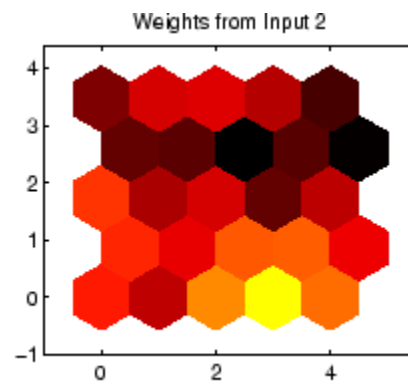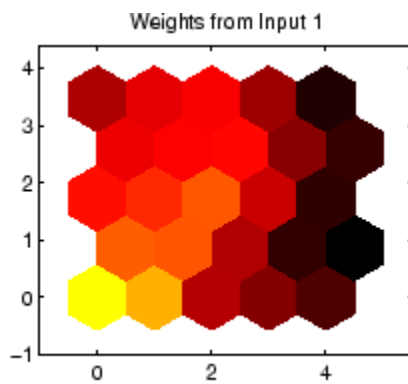

See Also

[plotsomhits](#) | [plotsomnc](#) | [plotsomnd](#)

Purpose Plot self-organizing map weight positions


Syntax `plotsompos(net)`
`plotsompos(net,inputs)`

Description `plotsompos(net)` plots the input vectors as green dots and shows how the SOM classifies the input space by showing blue-gray dots for each neuron's weight vector and connecting neighboring neurons with red lines.

`plotsompos(net,inputs)` plots the input data alongside the weights.

Examples


```
x = iris_dataset;  
net = selforgmap([10 10]);  
net = train(net,x);  
plotsompos(net,x)
```

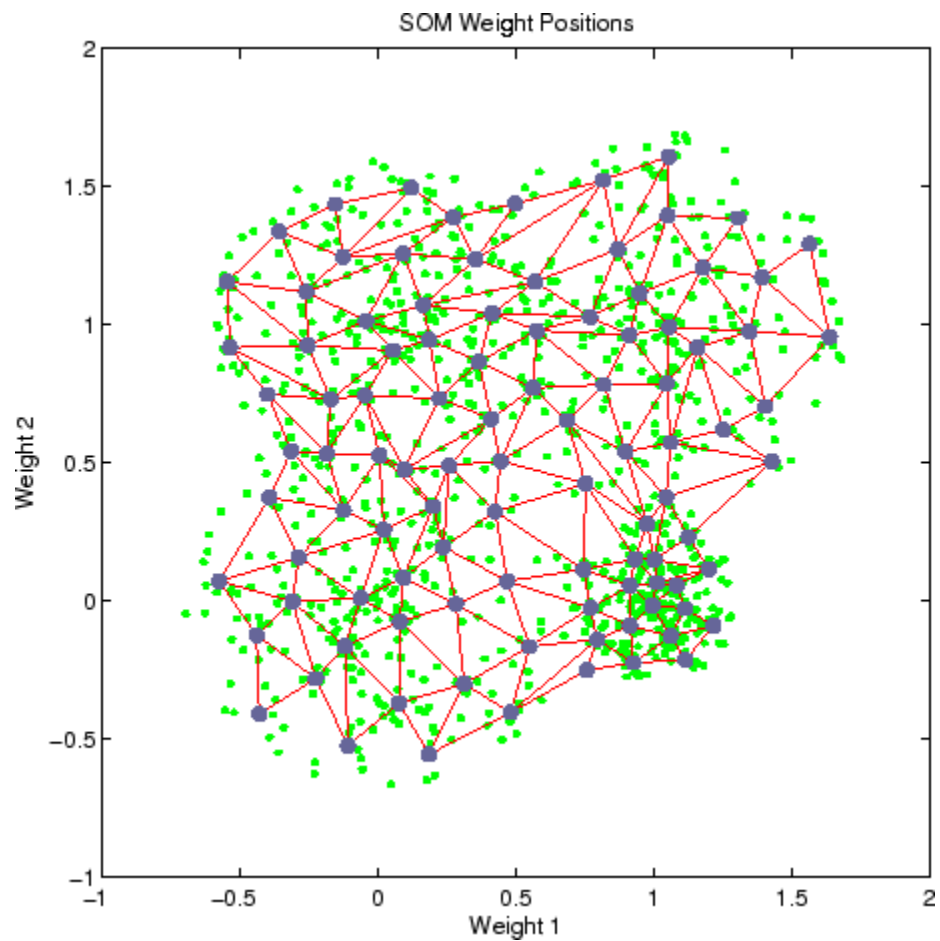

See Also

`plotsomnd` | `plotsomplanes` | `plotsomhits`

- Purpose** Plot self-organizing map topology
- Syntax** `plotsomtop(net)`
- Description** `plotsomtop(net)` plots the topology of a SOM layer.
- Examples**
- ```
x = iris_dataset;
net = selforgmap([8 8]);
plotsomtop(net);
```

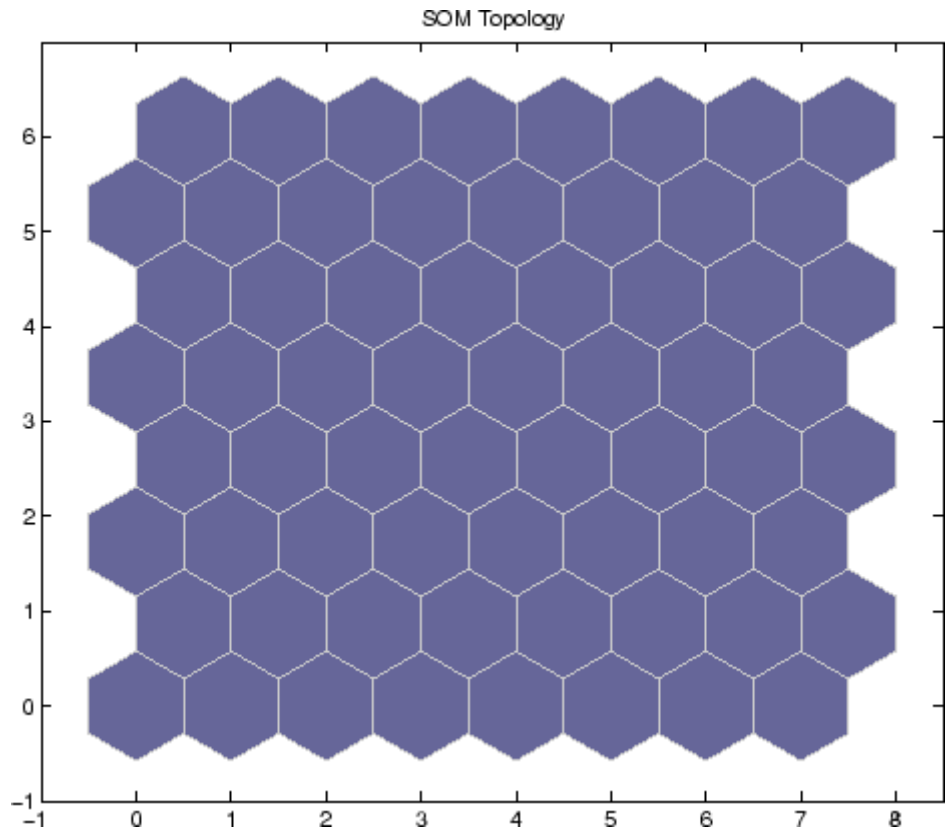

# plotsomtop

---

## **See Also**

`plotsomnd` | `plotsomplanes` | `plotsomhits`


**Purpose** Plot training state values

**Syntax** `plottrainstate(tr)`

**Description** `plottrainstate(tr)` plots the training state from a training record `tr` returned by `train`.

**Examples**

```
[x,t] = house_dataset;
net = feedforwardnet(10);
[net,tr] = train(net,x,t);
plottrainstate(tr)
```

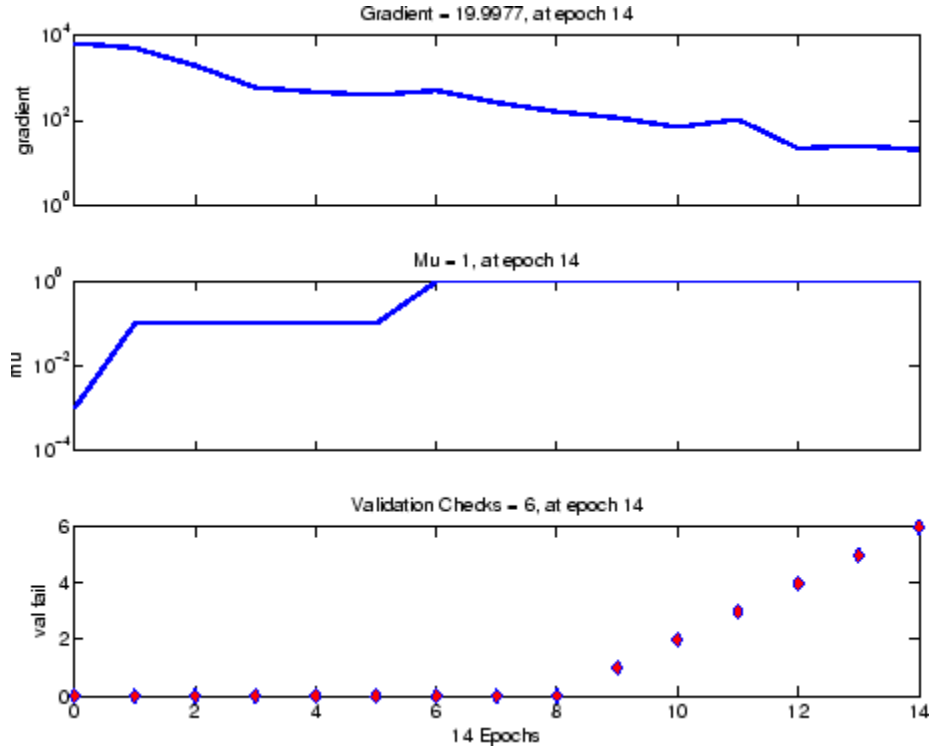

# plottrainstate

---

## See Also

`plotfit` | `plotperform` | `plotregression`

**Purpose** Plot vectors as lines from origin

**Syntax** `plotv(M,T)`

**Description** `plotv(M,T)` takes two inputs,

M R-by-Q matrix of Q column vectors with R elements

T The line plotting type (optional; default = ' - ')

and plots the column vectors of M.

R must be 2 or greater. If R is greater than 2, only the first two rows of M are used for the plot.

**Examples** `plotv([- .4 0.7 .2; -0.5 .1 0.5], '-')`

# plotvec

---

**Purpose** Plot vectors with different colors

**Syntax** `plotvec(X,C,M)`

**Description** `plotvec(X,C,M)` takes these inputs,

|   |                                 |
|---|---------------------------------|
| X | Matrix of (column) vectors      |
| C | Row vector of color coordinates |
| M | Marker (default = '+')          |

and plots each *i*th vector in X with a marker M, using the *i*th value in C as the color coordinate.

`plotvec(X)` only takes a matrix X and plots each *i*th vector in X with marker '+' using the index *i* as the color coordinate.

## Examples

```
x = [0 1 0.5 0.7; -1 2 0.5 0.1];
c = [1 2 3 4];
plotvec(x,c)
```



**Purpose**

Plot Hinton diagram of weight and bias values

**Syntax**

```
plotwb(net)
plotwb(IW,LW,B)
plotwb(..., 'toLayers', toLayers)
plotwb(..., 'fromInputs', fromInputs)
plotwb(..., 'fromLayers', fromLayers)
plotwb(..., 'root', root)
```

**Description**

`plotwb(net)` takes a neural network and plots all its weights and biases.

`plotwb(IW,LW,B)` takes a neural networks input weights, layer weights and biases and plots them.

`plotwb(..., 'toLayers', toLayers)` optionally defines which destination layers whose input weights, layer weights and biases will be plotted.

`plotwb(..., 'fromInputs', fromInputs)` optionally defines which inputs will have their weights plotted.

`plotwb(..., 'fromLayers', fromLayers)` optionally defines which layers will have weights coming from them plotted.

`plotwb(..., 'root', root)` optionally defines the root used to scale the weight/bias patch sizes. The default is 2, which makes the 2-dimensional patch sizes scale directly with absolute weight and bias sizes. Larger values of root magnify the relative patch sizes of smaller weights and biases, making differences in smaller values easier to see.

**Examples**

Here a cascade-forward network is configured for particular data and its weights and biases are plotted in several ways.

```
[x,t] = simplefit_dataset;
net = cascadeforwardnet([15 5]);
net = configure(net,x,t);
plotwb(net)
plotwb(net, 'root', 3)
```

# plotwb

---

```
plotwb(net, 'root', 4)
plotwb(net, 'toLayers', 2)
plotwb(net, 'fromLayers', 1)
plotwb(net, 'toLayers', 2, 'fromInputs', 1)
```

## See Also

plotsomplanes

**Purpose** Pseudonormalize columns of matrix

**Syntax** `pnormc(X,R)`

**Description** `pnormc(X,R)` takes these arguments,

X M-by-N matrix

R (Optional) radius to normalize columns to (default = 1)

and returns X with an additional row of elements, which results in new column vector lengths of R.

---

**Caution** For this function to work properly, the columns of X must originally have vector lengths less than R.

---

**Examples**


```
x = [0.1 0.6; 0.3 0.1];
y = pnormc(x)
```

**See Also** `normc` | `normr`

## Purpose

Positive linear transfer function

## Graph and Symbol



Positive Linear Transfer Function

## Syntax

```
A = poslin(N,FP)
info = poslin('code')
```

## Description

`poslin` is a neural transfer function. Transfer functions calculate a layer's output from its net input.

`A = poslin(N,FP)` takes `N` and optional function parameters,

|                 |                                             |
|-----------------|---------------------------------------------|
| <code>N</code>  | S-by-Q matrix of net input (column) vectors |
| <code>FP</code> | Struct of function parameters (ignored)     |

and returns `A`, the S-by-Q matrix of `N`'s elements clipped to `[0, inf]`.

`info = poslin('code')` returns information about this function. The following codes are supported:

`poslin('name')` returns the name of this function.

`poslin('output',FP)` returns the `[min max]` output range.

`poslin('active',FP)` returns the `[min max]` active range.

`poslin('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is S-by-S-by-Q or S-by-Q.

`poslin('fpnames')` returns the names of the function parameters.

`poslin('fpdefaults')` returns the default function parameters.

## Examples

Here is the code to create a plot of the poslin transfer function.

```
n = -5:0.1:5;
a = poslin(n);
plot(n,a)
```

Assign this transfer function to layer *i* of a network.

```
net.layers{i}.transferFcn = 'poslin';
```

## Network Use

To change a network so that a layer uses poslin, set net.layers{i}.transferFcn to 'poslin'.

Call sim to simulate the network with poslin.

## Algorithms

The transfer function poslin returns the output *n* if *n* is greater than or equal to zero and 0 if *n* is less than or equal to zero.

$$\begin{aligned} \text{poslin}(n) &= n, & \text{if } n >= 0 \\ &= 0, & \text{if } n <= 0 \end{aligned}$$

## See Also

sim | purelin | satlin | satlins

# preparets

---

**Purpose** Prepare input and target time series data for network simulation or training

**Syntax** `[Xs,Xi,Ai,Ts,EWs,shift] = preparets(net,Xnf,Tnf,Tf,EW)`

**Description** This function simplifies the normally complex and error prone task of reformatting input and target time series. It automatically shifts input and target time series as many steps as are needed to fill the initial input and layer delay states. If the network has open loop feedback, then it copies feedback targets into the inputs as needed to define the open loop inputs.

Each time a new network is designed, with different numbers of delays or feedback settings, `preparets` can be called to reformat input and target data accordingly. Also, each time a network is transformed with `openloop`, `closeloop`, `removedelay` or `adddelay`, this function can reformat the data accordingly.

`[Xs,Xi,Ai,Ts,EWs,shift] = preparets(net,Xnf,Tnf,Tf,EW)` takes these arguments,

|                  |                               |
|------------------|-------------------------------|
| <code>net</code> | Neural network                |
| <code>Xnf</code> | Non-feedback inputs           |
| <code>Tnf</code> | Non-feedback targets          |
| <code>Tf</code>  | Feedback targets              |
| <code>EW</code>  | Error weights (default = {1}) |

and returns,

|                 |                            |
|-----------------|----------------------------|
| <code>Xs</code> | Shifted inputs             |
| <code>Xi</code> | Initial input delay states |
| <code>Ai</code> | Initial layer delay states |
| <code>Ts</code> | Shifted targets            |

|       |                                                                                                  |
|-------|--------------------------------------------------------------------------------------------------|
| Ews   | Shifted error weights                                                                            |
| shift | The number of timesteps truncated from the front of X and T in order to properly fill Xi and Ai. |

## Examples

Here a time-delay network with 20 hidden neurons is created, trained and simulated.

```
net = timedelaynet(20);
view(net)
[X,T] = simpleseries_dataset;
[Xs,Xi,Ai,Ts] = preparets(net,X,T);
net = train(net,Xs,Ts);
Y = net(Xs,Xi,Ai)
```

Here a NARX network is designed. The NARX network has a standard input and an open-loop feedback output to an associated feedback input.

```
[X,T] = simplenarx_dataset;
net = narxnet(1:2,1:2,20);
view(net)
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);
net = train(net,Xs,Ts,Xi,Ai);
y = net(Xs,Xi,Ai);
```

Now the network is converted to closed loop, and the data is reformatted to simulate the network's closed-loop response.

```
net = closeloop(net);
view(net)
[Xs,Xi,Ai] = preparets(net,X,{},T);
y = net(Xs,Xi,Ai);
```

## See Also

adddelay | closeloop | narnet | narxnet | openloop | removedelay  
| timedelaynet

# processpca

---

**Purpose** Process columns of matrix with principal component analysis

**Syntax**

```
[Y,PS] = processpca(X,maxfrac)
[Y,PS] = processpca(X,FP)
Y = processpca('apply',X,PS)
X = processpca('reverse',Y,PS)
name = processpca('name')
fp = processpca('pdefaults')
names = processpca('pdesc')
processpca('pcheck',fp);
```

**Description** processpca processes matrices using principal component analysis so that each row is uncorrelated, the rows are in the order of the amount they contribute to total variation, and rows whose contribution to total variation are less than maxfrac are removed.

[Y,PS] = processpca(X,maxfrac) takes X and an optional parameter,

|         |                                                              |
|---------|--------------------------------------------------------------|
| X       | N-by-Q matrix or a 1-by-TS row cell array of N-by-Q matrices |
| maxfrac | Maximum fraction of variance for removed rows (default is 0) |

and returns

|    |                                                             |
|----|-------------------------------------------------------------|
| Y  | Each N-by-Q matrix with N - M rows deleted (optional)       |
| PS | Process settings that allow consistent processing of values |

[Y,PS] = processpca(X,FP) takes parameters as a struct:  
FP.maxfrac.

Y = processpca('apply',X,PS) returns Y, given X and settings PS.



`X = processpca('reverse',Y,PS)` returns X, given Y and settings PS.  
`name = processpca('name')` returns the name of this process method.  
`fp = processpca('pdefaults')` returns default process parameter structure.  
`names = processpca('pdesc')` returns the process parameter descriptions.  
`processpca('pcheck',fp)`; throws an error if any parameter is illegal.

## Examples

Here is how to format a matrix with an independent row, a correlated row, and a completely redundant row so that its rows are uncorrelated and the redundant row is dropped.

```
x1_independent = rand(1,5)
x1_correlated = rand(1,5) + x_independent;
x1_redundant = x_independent + x_correlated
x1 = [x1_independent; x1_correlated; x1_redundant]
[y1,ps] = processpca(x1)
```

Next, apply the same processing settings to new values.

```
x2_independent = rand(1,5)
x2_correlated = rand(1,5) + x_independent;
x2_redundant = x_independent + x_correlated
x2 = [x2_independent; x2_correlated; x2_redundant];
y2 = processpca('apply',x2,ps)
```

Reverse the processing of y1 to get x1 again.

```
x1_again = processpca('reverse',y1,ps)
```

## Algorithms

Values in rows whose elements are not all the same value are set to

$$y = 2*(x-\min x)/(max x-\min x) - 1;$$

Values in rows with all the same value are set to 0.

## Definitions

In some situations, the dimension of the input vector is large, but the components of the vectors are highly correlated (redundant). It is useful in this situation to reduce the dimension of the input vectors. An effective procedure for performing this operation is principal component analysis. This technique has three effects: it orthogonalizes the components of the input vectors (so that they are uncorrelated with each other), it orders the resulting orthogonal components (principal components) so that those with the largest variation come first, and it eliminates those components that contribute the least to the variation in the data set. The following code illustrates the use of `processpca`, which performs a principal-component analysis using the processing setting `maxfrac` of 0.02.

```
[pn,ps1] = mapstd(p);
[ptrans,ps2] = processpca(pn,0.02);
```

The input vectors are first normalized, using `mapstd`, so that they have zero mean and unity variance. This is a standard procedure when using principal components. In this example, the second argument passed to `processpca` is 0.02. This means that `processpca` eliminates those principal components that contribute less than 2% to the total variation in the data set. The matrix `ptrans` contains the transformed input vectors. The settings structure `ps2` contains the principal component transformation matrix. After the network has been trained, these settings should be used to transform any future inputs that are applied to the network. It effectively becomes a part of the network, just like the network weights and biases. If you multiply the normalized input vectors `pn` by the transformation matrix `transMat`, you obtain the transformed input vectors `ptrans`.

If `processpca` is used to preprocess the training set data, then whenever the trained network is used with new inputs, you should preprocess them with the transformation matrix that was computed for the training set, using `ps2`. The following code applies a new set of inputs to a network already trained.

```
pnewn = mapstd('apply',pnew,ps1);
pnewtrans = processpca('apply',pnewn,ps2);
```

```
a = sim(net,pnewtrans);
```

Principal component analysis is not reliably reversible. Therefore it is only recommended for input processing. Outputs require reversible processing functions.

Principal component analysis is not part of the default processing for `feedforwardnet`. If you wish to add this, you can use the following command:

```
net.inputs{1}.processFcns{end+1} = 'processpca';
```

**See Also**

`fixunknowns` | `mapminmax` | `mapstd`

# prune

---

**Purpose** Delete neural inputs, layers, and outputs with sizes of zero

**Syntax** `[net,pi,pl,po] = prune(net)`

**Description** This function removes zero-sized inputs, layers, and outputs from a network. This leaves a network which may have fewer inputs and outputs, but which implements the same operations, as zero-sized inputs and outputs do not convey any information.

One use for this simplification is to prepare a network with zero sized subobjects for Simulink, where zero sized signals are not supported.

The companion function `prunedata` can prune data to remain consistent with the transformed network.

`[net,pi,pl,po] = prune(net)` takes a neural network and returns

|                  |                                                     |
|------------------|-----------------------------------------------------|
| <code>net</code> | The same network with zero-sized subobjects removed |
| <code>pi</code>  | Indices of pruned inputs                            |
| <code>pl</code>  | Indices of pruned layers                            |
| <code>po</code>  | Indices of pruned outputs                           |

**Examples** Here a NARX dynamic network is created which has one external input and a second input which feeds back from the output.

```
net = narxnet(20);
view(net)
```

The network is then trained on a single random time-series problem with 50 timesteps. The external input happens to have no elements.

```
X = nndata(0,1,50);
T = nndata(1,1,50);
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);
net = train(net,Xs,Ts);
```

The network and data are then pruned before generating a Simulink diagram and initializing its input and layer states.

```
[net2,pi,p1,p0] = prune(net);
view(net)
[Xs2,Xi2,Ai2,Ts2] = prunedata(net,pi,p1,p0,Xs,Xi,Ai,Ts)
[sysName,netName] = gensim(net);
setsiminit(sysName,netName,Xi2,Ai2)
```

**See Also**

[prunedata](#) | [gensim](#)

# prunedata

---

## Purpose

Purpose

## Syntax

```
[Xp,Xip,Aip,Tp] = prunedata(pi,pl,po,X,Xi,Ai,T)
```

## Description

This function prunes data to be consistent with a network whose zero-sized inputs, layers, and outputs have been removed with `prune`.

One use for this simplification is to prepare a network with zero-sized subobjects for Simulink, where zero-sized signals are not supported.

`[Xp,Xip,Aip,Tp] = prunedata(pi,pl,po,X,Xi,Ai,T)` takes these arguments,

|                 |                            |
|-----------------|----------------------------|
| <code>pi</code> | Indices of pruned inputs   |
| <code>pl</code> | Indices of pruned layers   |
| <code>po</code> | Indices of pruned outputs  |
| <code>X</code>  | Input data                 |
| <code>Xi</code> | Initial input delay states |
| <code>Ai</code> | Initial layer delay states |
| <code>T</code>  | Target data                |

and returns the pruned inputs, input and layer delay states, and targets.

## Examples

Here a NARX dynamic network is created which has one external input and a second input which feeds back from the output.

```
net = narxnet(20);
view(net)
```

The network is then trained on a single random time-series problem with 50 timesteps. The external input happens to have no elements.

```
X = nndata(0,1,50);
T = nndata(1,1,50);
```

```
[Xs,Xi,Ai,Ts] = preparets(net,X,{},T);
net = train(net,Xs,Ts);
```

The network and data are then pruned before generating a Simulink diagram and initializing its input and layer states.

```
[net2,pi,pl,po] = prune(net);
view(net)
[Xs2,Xi2,Ai2,Ts2] = prunedata(net,pi,pl,po,Xs,Xi,Ai,Ts)
[sysName,netName] = gensim(net);
setsiminit(sysName,netName,Xi2,Ai2)
```

## See Also

[prune](#) | [gensim](#)


# purelin

---

## Purpose

Linear transfer function

## Graph and Symbol



$$a = \text{purelin}(n)$$

Linear Transfer Function

## Syntax

```
A = purelin(N,FP)
info = purelin('code')
```

## Description

`purelin` is a neural transfer function. Transfer functions calculate a layer's output from its net input.

`A = purelin(N,FP)` takes `N` and optional function parameters,

|                 |                                             |
|-----------------|---------------------------------------------|
| <code>N</code>  | S-by-Q matrix of net input (column) vectors |
| <code>FP</code> | Struct of function parameters (ignored)     |

and returns `A`, an S-by-Q matrix equal to `N`.

`info = purelin('code')` returns useful information for each supported `code` string:

`purelin('name')` returns the name of this function.

`purelin('output',FP)` returns the [min max] output range.

`purelin('active',FP)` returns the [min max] active input range.

`purelin('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is S-by-S-by-Q or S-by-Q.

`purelin('fpnames')` returns the names of the function parameters.

`purelin('fpdefaults')` returns the default function parameters.



**Examples**

Here is the code to create a plot of the `purelin` transfer function.

```
n = -5:0.1:5;
a = purelin(n);
plot(n,a)
```

Assign this transfer function to layer `i` of a network.

```
net.layers{i}.transferFcn = 'purelin';
```

**Algorithms**

```
a = purelin(n) = n
```

**See Also**

```
sim | satlin | satlins
```

# quant

---

**Purpose** Discretize values as multiples of quantity

**Syntax** `quant(X,Q)`

**Description** `quant(X,Q)` takes two inputs,

X                    Matrix, vector, or scalar


Q                    Minimum value

and returns values from X rounded to nearest multiple of Q.

**Examples** `x = [1.333 4.756 -3.897];`  
`y = quant(x,0.1)`

**Purpose**

Radial basis transfer function

**Graph and Symbol**

Radial Basis Function

**Syntax** $A = \text{radbas}(N, FP)$ **Description**

radbas is a neural transfer function. Transfer functions calculate a layer's output from its net input.

$A = \text{radbas}(N, FP)$  takes one or two inputs,

|      |                                             |
|------|---------------------------------------------|
| $N$  | S-by-Q matrix of net input (column) vectors |
| $FP$ | Struct of function parameters (ignored)     |

and returns  $A$ , an S-by-Q matrix of the radial basis function applied to each element of  $N$ .

**Examples**

Here you create a plot of the radbas transfer function.

```
n = -5:0.1:5;
a = radbas(n);
plot(n,a)
```

Assign this transfer function to layer  $i$  of a network.

```
net.layers{i}.transferFcn = 'radbas';
```

# radbas


---

**Algorithms**     `a = radbas(n) = exp(-n^2)`

**See Also**        `sim | radbasn | tribas`

**Purpose**

Normalized radial basis transfer function

**Graph and Symbol**

Radial Basis Function

**Syntax**

$A = \text{radbasn}(N, FP)$

**Description**

radbasn is a neural transfer function. Transfer functions calculate a layer's output from its net input. This function is equivalent to radbas, except that output vectors are normalized by dividing by the sum of the pre-normalized values.

$A = \text{radbasn}(N, FP)$  takes one or two inputs,

|      |                                             |
|------|---------------------------------------------|
| $N$  | S-by-Q matrix of net input (column) vectors |
| $FP$ | Struct of function parameters (ignored)     |

and returns  $A$ , an S-by-Q matrix of the radial basis function applied to each element of  $N$ .

**Examples**

Here six random 3-element vectors are passed through the radial basis transform and normalized.

```
n = rand(3,6)
a = radbasn(n)
```

Assign this transfer function to layer  $i$  of a network.

```
net.layers{i}.transferFcn = 'radbasn';
```

# radbasn

---

**Algorithms**     `a = radbasn(n) = exp(-n^2) / sum(exp(-n^2))`

**See Also**        `sim | radbas | tribas`

**Purpose** Normalized column weight initialization function

**Syntax** `W = randnc(S,PR)`

**Description** `randnc` is a weight initialization function.

`W = randnc(S,PR)` takes two inputs,

`S`                      Number of rows (neurons)

`PR`                     R-by-2 matrix of input value ranges = [Pmin Pmax]

and returns an S-by-R random matrix with normalized columns.

You can also call this in the form `randnc(S,R)`.

**Examples** A random matrix of four normalized three-element columns is generated:

```
M = randnc(3,4)
```

```
M =
```

```
 -0.6007 -0.4715 -0.2724 0.5596
 -0.7628 -0.6967 -0.9172 0.7819
 -0.2395 0.5406 -0.2907 0.2747
```

**See Also** `randnr`

# randnr

---

**Purpose** Normalized row weight initialization function

**Syntax** `W = randnr(S,PR)`

**Description** `randnr` is a weight initialization function.

`W = randnr(S,PR)` takes two inputs,

`S`                    Number of rows (neurons)

`PR`                    R-by-2 matrix of input value ranges = [Pmin Pmax]

and returns an S-by-R random matrix with normalized rows.

You can also call this in the form `randnr(S,R)`.

**Examples** A matrix of three normalized four-element rows is generated:

`M = randnr(3,4)`

`M =`

|         |         |         |         |
|---------|---------|---------|---------|
| 0.9713  | 0.0800  | -0.1838 | -0.1282 |
| 0.8228  | 0.0338  | 0.1797  | 0.5381  |
| -0.3042 | -0.5725 | 0.5436  | 0.5331  |

**See Also** `randnc`



**Purpose** Symmetric random weight/bias initialization function

**Syntax**

```
W = rands(S,PR)
M = rands(S,R)
v = rands(S)
```

**Description** rands is a weight/bias initialization function.

W = rands(S,PR) takes

S                    Number of neurons

PR                   R-by-2 matrix of R input ranges

and returns an S-by-R weight matrix of random values between -1 and 1.

M = rands(S,R) returns an S-by-R matrix of random values. v = rands(S) returns an S-by-1 vector of random values.

**Examples** Here, three sets of random values are generated with rands.

```
rands(4,[0 1; -2 2])
rands(4)
rands(2,3)
```

**Network Use** To prepare the weights and the bias of layer i of a custom network to be initialized with rands,

- 1 Set net.initFcn to 'initlay'. (net.initParam automatically becomes initlay's default parameters.)
- 2 Set net.layers{i}.initFcn to 'initwb'.
- 3 Set each net.inputWeights{i,j}.initFcn to 'rands'.
- 4 Set each net.layerWeights{i,j}.initFcn to 'rands'.
- 5 Set each net.biases{i}.initFcn to 'rands'.

# rands

---

To initialize the network, call `init`.

## **See Also**

`randsmall` | `randnr` | `randnc` | `initwb` | `initlay` | `init`

**Purpose** Small random weight/bias initialization function

**Syntax**

```
W = randsmall(S,PR)
M = rands(S,R)
v = rands(S)
```

**Description** randsmall is a weight/bias initialization function.

W = randsmall(S,PR) takes

S                    Number of neurons

PR                   R-by-2 matrix of R input ranges

and returns an S-by-R weight matrix of small random values between -0.1 and 0.1.

M = rands(S,R) returns an S-by-R matrix of random values. v = rands(S) returns an S-by-1 vector of random values.

**Examples** Here three sets of random values are generated with rands.

```
randsmall(4,[0 1; -2 2])
randsmall(4)
randsmall(2,3)
```

**Network Use** To prepare the weights and the bias of layer i of a custom network to be initialized with rands,

- 1 Set net.initFcn to 'initlay'. (net.initParam automatically becomes initlay's default parameters.)
- 2 Set net.layers{i}.initFcn to 'initwb'.
- 3 Set each net.inputWeights{i,j}.initFcn to 'randsmall'.
- 4 Set each net.layerWeights{i,j}.initFcn to 'randsmall'.

# randsmall

---

**5** Set each `net.biases{i}.initFcn` to `'randsmall'`.

To initialize the network, call `init`.

## See Also

`rands` | `randnr` | `randnc` | `initwb` | `initlay` | `init`

---

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Purpose</b>     | Random layer topology function                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax</b>      | <code>pos = randtop(dim1,dim2,...,dimN)</code>                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b> | <p>randtop calculates the neuron positions for layers whose neurons are arranged in an N-dimensional random pattern.</p> <p><code>pos = randtop(dim1,dim2,...,dimN)</code> takes N arguments,</p> <p><code>dim<sub>i</sub></code>                      Length of layer in dimension <i>i</i></p> <p>and returns an N-by-S matrix of N coordinate vectors, where S is the product of <code>dim1*dim2*...*dimN</code>.</p> |
| <b>Examples</b>    | <p>This code creates and displays a two-dimensional layer with neurons arranged in a random pattern.</p> <pre>pos = randtop(8,5); net = selforgmap([8 5], 'topologyFcn', 'randtop'); plotsomtop(net)</pre>                                                                                                                                                                                                               |
| <b>See Also</b>    | <code>gridtop</code>   <code>hextop</code>   <code>tritop</code>                                                                                                                                                                                                                                                                                                                                                         |

# regression

---

**Purpose** Linear regression

**Syntax** `[r,m,b] = regression(t,y)`  
`[r,m,b] = regression(t,y,'one')`

**Description** `[r,m,b] = regression(t,y)` takes these arguments,

`t` Target matrix or cell array data with a total of N matrix rows

`y` Output matrix or cell array data of the same size

and returns these outputs,

`r` Regression values for each of the N matrix rows

`m` Slope of regression fit for each of the N matrix rows

`b` Offset of regression fit for each of the N matrix rows

`[r,m,b] = regression(t,y,'one')` combines all matrix rows before regressing, returning single scalar regression, slope and offset values.

## Examples

Here a feedforward network is trained and regression performed on its targets and outputs.

```
[x,t] = simplefit_dataset;
net = feedforwardnet(20);
net = train(net,x,t);
y = net(x);
[r,m,b] = regression(t,y)
plotregression(t,y)
```

## See Also

`plotregression` | `confusion`

**Purpose** Process matrices by removing rows with constant values

**Syntax**

```
[Y,PS] = removeconstantrows(X,max_range)
[Y,PS] = removeconstantrows(X,FP)
Y = removeconstantrows('apply',X,PS)
X = removeconstantrows('reverse',Y,PS)
```

**Description** removeconstantrows processes matrices by removing rows with constant values.

[Y,PS] = removeconstantrows(X,max\_range) takes X and an optional parameter,

|           |                                                                     |
|-----------|---------------------------------------------------------------------|
| X         | Single N-by-Q matrix or a 1-by-TS row cell array of N-by-Q matrices |
| max_range | Maximum range of values for row to be removed (default is 0)        |

and returns

|    |                                                             |
|----|-------------------------------------------------------------|
| Y  | Each M-by-Q matrix with N - M rows deleted (optional)       |
| PS | Process settings that allow consistent processing of values |

[Y,PS] = removeconstantrows(X,FP) takes parameters as a struct: FP.max\_range.

Y = removeconstantrows('apply',X,PS) returns Y, given X and settings PS.

X = removeconstantrows('reverse',Y,PS) returns X, given Y and settings PS.

# removeconstantrows

---

## Examples

Here is how to format a matrix so that the rows with constant values are removed.

```
x1 = [1 2 4; 1 1 1; 3 2 2; 0 0 0]
[y1,PS] = removeconstantrows(x1)
```

Next, apply the same processing settings to new values.

```
x2 = [5 2 3; 1 1 1; 6 7 3; 0 0 0]
y2 = removeconstantrows('apply',x2,PS)
```

Reverse the processing of y1 to get x1 again.

```
x1_again = removeconstantrows('reverse',y1,PS)
```

## See Also

[fixunknowns](#) | [mapminmax](#) | [mapstd](#) | [processpca](#)



**Purpose** Remove delay to neural network's response

**Syntax** `net = removedelay(net,n)`

**Description** `net = removedelay(net,n)` takes these arguments,

|                  |                  |
|------------------|------------------|
| <code>net</code> | Neural network   |
| <code>n</code>   | Number of delays |

and returns the network with input delay connections decreased, and output feedback delays increased, by the specified number of delays `n`. The result is a network which behaves identically, except that outputs are produced `n` timesteps later.

If the number of delays `n` is not specified, a default of one delay is used.

## Examples

Here a time delay network is created, trained and simulated in its original form on an input time series `X` and target series `T`. It is then with a delay removed and then added back. These first and third outputs will be identical, while the second will be shifted by one timestep.

```
[X,T] = simpleseries_dataset;
net = timedelaynet(1:2,20);
[Xs,Xi,Ai,Ts] = preparets(net,X,T);
net = train(net,Xs,Ts,Xi);
y1 = net(Xs)
net2 = removedelay(net);
[Xs,Xi,Ai,Ts] = preparets(net2,X,T);
y2 = net2(Xs,Xi)
net3 = adddelay(net2)
[Xs,Xi,Ai,Ts] = preparets(net3,X,T);
y3 = net3(Xs,Xi)
```

**See Also** `adddelay` | `closeloop` | `openloop`

# removerows

---

**Purpose** Process matrices by removing rows with specified indices

**Syntax**

```
[Y,PS] = removerows(X,'ind',ind)
[Y,PS] = removerows(X,FP)
Y = removerows('apply',X,PS)
X = removerows('reverse',Y,PS)
dx_dy = removerows('dx',X,Y,PS)
dx_dy = removerows('dx',X,[],PS)
name = removerows('name')
fp = removerows('pdefaults')
names = removerows('pdesc')
removerows('pcheck',FP)
```

**Description** removerows processes matrices by removing rows with the specified indices.

`[Y,PS] = removerows(X,'ind',ind)` takes `X` and an optional parameter,

|                  |                                                              |
|------------------|--------------------------------------------------------------|
| <code>X</code>   | N-by-Q matrix or a 1-by-TS row cell array of N-by-Q matrices |
| <code>ind</code> | Vector of row indices to remove (default is [])              |

and returns

|                 |                                                                           |
|-----------------|---------------------------------------------------------------------------|
| <code>Y</code>  | Each M-by-Q matrix, where $M == N - \text{length}(\text{ind})$ (optional) |
| <code>PS</code> | Process settings that allow consistent processing of values               |

`[Y,PS] = removerows(X,FP)` takes parameters as a struct: `FP.ind`.

`Y = removerows('apply',X,PS)` returns `Y`, given `X` and settings `PS`.

`X = removerows('reverse',Y,PS)` returns `X`, given `Y` and settings `PS`.

`dx_dy = removerows('dx',X,Y,PS)` returns the M-by-N-by-Q derivative of Y with respect to X.

`dx_dy = removerows('dx',X,[],PS)` returns the derivative, less efficiently.

`name = removerows('name')` returns the name of this process method.

`fp = removerows('pdefaults')` returns the default process parameter structure.

`names = removerows('pdesc')` returns the process parameter descriptions.

`removerows('pcheck',FP)` throws an error if any parameter is illegal.

## Examples

Here is how to format a matrix so that rows 2 and 4 are removed:

```
x1 = [1 2 4; 1 1 1; 3 2 2; 0 0 0]
[y1,ps] = removerows(x1,'ind',[2 4])
```

Next, apply the same processing settings to new values.

```
x2 = [5 2 3; 1 1 1; 6 7 3; 0 0 0]
y2 = removerows('apply',x2,ps)
```

Reverse the processing of y1 to get x1 again.

```
x1_again = removerows('reverse',y1,ps)
```

## Algorithms

In the reverse calculation, the unknown values of replaced rows are represented with NaN values.

## See Also

`fixunknowns` | `mapminmax` | `mapstd` | `processpca`

# revert

---

**Purpose** Change network weights and biases to previous initialization values

**Syntax** `net = revert (net)`

**Description** `net = revert (net)` returns neural network `net` with weight and bias values restored to the values generated the last time the network was initialized.

If the network is altered so that it has different weight and bias connections or different input or layer sizes, then `revert` cannot set the weights and biases to their previous values and they are set to zeros instead.

**Examples** Here a perceptron is created with input size set to 2 and number of neurons to 1.

```
net = perceptron;
net.inputs{1}.size = 2;
net.layers{1}.size = 1;
```

The initial network has weights and biases with zero values.

```
net.iw{1,1}, net.b{1}
```

Change these values as follows:

```
net.iw{1,1} = [1 2];
net.b{1} = 5;
net.iw{1,1}, net.b{1}
```

You can recover the network's initial values as follows:

```
net = revert(net);
net.iw{1,1}, net.b{1}
```

**See Also** `init` | `sim` | `adapt` | `train`

**Purpose** Receiver operating characteristic

**Syntax** `[ tpr, fpr, thresholds ] = roc( targets, outputs )`

**Description** The *receiver operating characteristic* is a metric used to check the quality of classifiers. For each class of a classifier, `roc` applies threshold values across the interval `[0, 1]` to outputs. For each threshold, two values are calculated, the True Positive Ratio (the number of outputs greater or equal to the threshold, divided by the number of one targets), and the False Positive Ratio (the number of outputs less than the threshold, divided by the number of zero targets).

You can visualize the results of this function with `plotroc`.

`[ tpr, fpr, thresholds ] = roc( targets, outputs )` takes these arguments:

|                      |                                                                                                                                                                                                                                                                                                                           |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>targets</code> | S-by-Q matrix, where each column vector contains a single 1 value, with all other elements 0. The index of the 1 indicates which of S categories that vector represents.                                                                                                                                                  |
| <code>outputs</code> | S-by-Q matrix, where each column contains values in the range <code>[0, 1]</code> . The index of the largest element in the column indicates which of S categories that vector presents. Alternately, 1-by-Q vector, where values greater or equal to 0.5 indicate class membership, and values below 0.5, nonmembership. |

and returns these values:

|            |                                                              |
|------------|--------------------------------------------------------------|
| tpr        | 1-by-S cell array of 1-by-N true-positive/positive ratios.   |
| fpr        | 1-by-S cell array of 1-by-N false-positive/negative ratios.  |
| thresholds | 1-by-S cell array of 1-by-N thresholds over interval [0, 1]. |

roc(targets,outputs) takes these arguments:

|         |                                                                                                                   |
|---------|-------------------------------------------------------------------------------------------------------------------|
| targets | 1-by-Q matrix of Boolean values indicating class membership.                                                      |
| outputs | S-by-Q matrix, of values in [0, 1] interval, where values greater than or equal to 0.5 indicate class membership. |

and returns these values:

|            |                                                   |
|------------|---------------------------------------------------|
| tpr        | 1-by-N vector of true-positive/positive ratios.   |
| fpr        | 1-by-N vector of false-positive/negative ratios.  |
| thresholds | 1-by-N vector of thresholds over interval [0, 1]. |

## Examples

```
load iris_dataset
net = patternnet(20);
net = train(net,irisInputs,irisTargets);
irisOutputs = sim(net,irisInputs);
[tpr,fpr,thresholds] = roc(irisTargets,irisOutputs)
```

## See Also

plotroc | confusion

**Purpose**

Sum absolute error performance function

**Syntax**

```
perf = sae(net,t,y,ew)
[...] = sae(...,'regularization',regularization)
[...] = sae(...,'normalization',normalization)
[...] = sae(...,'squaredWeighting',squaredWeighting)
[...] = sae(...,FP)
```

**Description**

sae is a network performance function. It measures performance according to the sum of squared errors.

perf = sae(net,t,y,ew) takes these input arguments and optional function parameters,

|     |                                        |
|-----|----------------------------------------|
| net | Neural network                         |
| t   | Matrix or cell array of target vectors |
| y   | Matrix or cell array of output vectors |
| ew  | Error weights (default = {1})          |

and returns the sum squared error.

This function has three optional function parameters that can be defined with parameter name/pair arguments, or as a structure FP argument with fields having the parameter name and assigned the parameter values:

```
[...] = sae(...,'regularization',regularization)
[...] = sae(...,'normalization',normalization)
[...] = sae(...,'squaredWeighting',squaredWeighting)
[...] = sae(...,FP)
```

- **regularization** — can be set to any value between the default of 0 and 1. The greater the regularization value, the more squared weights and biases are taken into account in the performance calculation.

- `normalization` — can be set to the default `'absolute'`, or `'normalized'` (which normalizes errors to the `[+2 -2]` range consistent with normalized output and target ranges of `[-1 1]`) or `'percent'` (which normalizes errors to the range `[-1 +1]`).
- `squaredWeighting` — can be set to the default `false`, for applying error weights to absolute errors, or `true` for applying error weights to the squared errors before squaring.

## Examples

Here a network is trained to fit a simple data set and its performance calculated

```
[x,t] = simplefit_dataset;
net = fitnet(10,'trainscg');
net.performFcn = 'sae';
net = train(net,x,t)
y = net(x)
e = t-y
perf = sae(net,t,y)
```

## Network Use


To prepare a custom network to be trained with `sae`, set `net.performFcn` to `'sae'`. This automatically sets `net.performParam` to the default function parameters.

Then calling `train`, `adapt` or `perform` will result in `sae` being used to calculate performance.



**Purpose**

Saturating linear transfer function

**Graph and Symbol**

$$a = \text{satlin}(n)$$

Satlin Transfer Function

**Syntax**

$A = \text{satlin}(N, FP)$

**Description**

satlin is a neural transfer function. Transfer functions calculate a layer's output from its net input.

$A = \text{satlin}(N, FP)$  takes one input,

|      |                                             |
|------|---------------------------------------------|
| $N$  | S-by-Q matrix of net input (column) vectors |
| $FP$ | Struct of function parameters (ignored)     |

and returns  $A$ , the S-by-Q matrix of  $N$ 's elements clipped to  $[0, 1]$ .

`info = satlin('code')` returns useful information for each supported *code* string:

`satlin('name')` returns the name of this function.

`satlin('output', FP)` returns the [min max] output range.

`satlin('active', FP)` returns the [min max] active input range.

`satlin('fullderiv')` returns 1 or 0, depending on whether  $dA_{dN}$  is S-by-S-by-Q or S-by-Q.

`satlin('fpnames')` returns the names of the function parameters.

`satlin('fpdefaults')` returns the default function parameters.

# satlin

---

## Examples

Here is the code to create a plot of the `satlin` transfer function.

```
n = -5:0.1:5;
a = satlin(n);
plot(n,a)
```

Assign this transfer function to layer `i` of a network.

```
net.layers{i}.transferFcn = 'satlin';
```

## Algorithms

```
a = satlin(n) = 0, if n <= 0
n, if 0 <= n <= 1
1, if 1 <= n
```


## See Also

`sim` | `poslin` | `satlins` | `purelin`

**Purpose**

Symmetric saturating linear transfer function

**Graph and Symbol**



Satlins Transfer Function

**Syntax**

$A = \text{satlins}(N, FP)$

**Description**

satlins is a neural transfer function. Transfer functions calculate a layer's output from its net input.

$A = \text{satlins}(N, FP)$  takes N and an optional argument,

- N                                      S-by-Q matrix of net input (column) vectors
- FP                                        Struct of function parameters (optional, ignored)

and returns A, the S-by-Q matrix of N's elements clipped to [-1, 1].

info = satlins('code') returns useful information for each supported code string:

satlins('name') returns the name of this function.

satlins('output', FP) returns the [min max] output range.

satlins('active', FP) returns the [min max] active input range.

satlins('fullderiv') returns 1 or 0, depending on whether dA\_dN is S-by-S-by-Q or S-by-Q.

satlins('fpnames') returns the names of the function parameters.

satlins('fpdefaults') returns the default function parameters.

# satlins

---

## Examples

Here is the code to create a plot of the `satlins` transfer function.

```
n = -5:0.1:5;
a = satlins(n);
plot(n,a)
```

## Algorithms

```
satlins(n) = -1, if n <= -1
n, if -1 <= n <= 1
1, if 1 <= n
```

## See Also

`sim` | `satlin` | `poslin` | `purelin`

**Purpose** Scalar product weight function

**Syntax**

```
Z = scalprod(W,P)
dim = scalprod('size',S,R,FP)
dw = scalprod('dw',W,P,Z,FP)
```

**Description** scalprod is the scalar product weight function. Weight functions apply weights to an input to get weighted inputs.

`Z = scalprod(W,P)` takes these inputs,

|                |                                           |
|----------------|-------------------------------------------|
| <code>W</code> | 1-by-1 weight matrix                      |
| <code>P</code> | R-by-Q matrix of Q input (column) vectors |

and returns the R-by-Q scalar product of W and P defined by  $Z = w*P$ .

`dim = scalprod('size',S,R,FP)` takes the layer dimension S, input dimension R, and function parameters, and returns the weight size [1-by-1].

`dw = scalprod('dw',W,P,Z,FP)` returns the derivative of Z with respect to W.

**Examples** Here you define a random weight matrix W and input vector P and calculate the corresponding weighted input Z.

```
W = rand(1,1);
P = rand(3,1);
Z = scalprod(W,P)
```

**Network Use** To change a network so an input weight uses scalprod, set `net.inputWeight{i,j}.weightFcn` to 'scalprod'.  
For a layer weight, set `net.layerWeight{i,j}.weightFcn` to 'scalprod'.

In either case, call `sim` to simulate the network with scalprod.

# scalprod

---

See `help newp` and `help newlin` for simulation examples.

## **See Also**

`dotprod` | `sim` | `dist` | `negdist` | `normprod`

**Purpose** Self-organizing map

**Syntax** `selforgmap(dimensions,coverSteps,initNeighbor,topologyFcn,  
distanceFcn)`

**Description** Self-organizing maps learn to cluster data based on similarity, topology, with a preference (but no guarantee) of assigning the same number of instances to each class.

Self-organizing maps are used both to cluster data and to reduce the dimensionality of data. They are inspired by the sensory and motor mappings in the mammal brain, which also appear to automatically organizing information topologically.

`selforgmap(dimensions,coverSteps,initNeighbor,topologyFcn,distanceFcn)` takes these arguments,

|                           |                                                                                  |
|---------------------------|----------------------------------------------------------------------------------|
| <code>dimensions</code>   | Row vector of dimension sizes (default = [8 8])                                  |
| <code>coverSteps</code>   | Number of training steps for initial covering of the input space (default = 100) |
| <code>initNeighbor</code> | Initial neighborhood size (default = 3)                                          |
| <code>topologyFcn</code>  | Layer topology function (default = 'hextop')                                     |
| <code>distanceFcn</code>  | Neuron distance function (default = 'linkdist')                                  |

and returns a self-organizing map.

**Examples** Here a self-organizing map is used to cluster a simple set of data.

```
x = simplecluster_dataset;
net = selforgmap([8 8])
net = train(net,x);
view(net)
y = net(x);
```

# selforgmap

---

```
classes = vec2ind(y)
```

## See Also

```
lvqnet | competlayer | nctool
```



**Purpose** Separate biases and weight values from weight/bias vector

**Syntax** `[b,IW,LW] = separatwb(net,wb)`

**Description** `[b,IW,LW] = separatwb(net,wb)` takes two arguments,

|                  |                    |
|------------------|--------------------|
| <code>net</code> | Neural network     |
| <code>wb</code>  | Weight/bias vector |

and returns

|                 |                                     |
|-----------------|-------------------------------------|
| <code>b</code>  | Cell array of bias vectors          |
| <code>IW</code> | Cell array of input weight matrices |
| <code>LW</code> | Cell array of layer weight matrices |

**Examples** Here a feedforward network is trained to fit some data, then its bias and weight values formed into a vector. The single vector is then redivided into the original biases and weights.

```
[x,t] = simplefit_dataset;
net = feedforwardnet(20);
net = train(net,x,t);
wb = formwb(net,net.b,net.iw,net.lw)
[b,iw,lw] = separatwb(net,wb)
```

**See Also** `getwb` | `formwb` | `setwb`

# seq2con

---

**Purpose** Convert sequential vectors to concurrent vectors

**Syntax** `b = seq2con(s)`

**Description** Neural Network Toolbox software represents batches of vectors with a matrix, and sequences of vectors with multiple columns of a cell array.

`seq2con` and `con2seq` allow concurrent vectors to be converted to sequential vectors, and back again.

`b = seq2con(s)` takes one input,

`s` N-by-TS cell array of matrices with M columns

and returns

`b` N-by-1 cell array of matrices with M\*TS columns

**Examples** Here three sequential values are converted to concurrent values.

```
p1 = {1 4 2}
p2 = seq2con(p1)
```

Here two sequences of vectors over three time steps are converted to concurrent vectors.

```
p1 = {[1; 1] [5; 4] [1; 2]; [3; 9] [4; 1] [9; 8]}
p2 = seq2con(p1)
```

**See Also** `con2seq` | `concur`

**Purpose** Set neural network data elements

**Syntax** `setelements(x,i,v)`

**Description** `setelements(x,i,v)` takes these arguments,

|                |                                                  |
|----------------|--------------------------------------------------|
| <code>x</code> | Neural network matrix or cell array data         |
| <code>i</code> | Indices                                          |
| <code>v</code> | Neural network data to store into <code>x</code> |

and returns the original data `x` with the data `v` stored in the elements indicated by the indices `i`.

**Examples** This code sets elements 1 and 3 of matrix data:

```
x = [1 2; 3 4; 7 4]
v = [10 11; 12 13];
y = setelements(x,[1 3],v)
```

This code sets elements 1 and 3 of cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
v = {[20 21 22; 23 24 25] [26 27 28; 29 30 31]}
y = setelements(x,[1 3],v)
```

**See Also** `nndata` | `numelements` | `getelements` | `catelements` | `setsamples` | `setsignals` | `settimesteps`

# setsamples

---

**Purpose** Set neural network data samples

**Syntax** `setsamples(x,i,v)`

**Description** `setsamples(x,i,v)` takes these arguments,

|                |                                                  |
|----------------|--------------------------------------------------|
| <code>x</code> | Neural network matrix or cell array data         |
| <code>i</code> | Indices                                          |
| <code>v</code> | Neural network data to store into <code>x</code> |

and returns the original data `x` with the data `v` stored in the samples indicated by the indices `i`.

**Examples** This code sets samples 1 and 3 of matrix data:

```
x = [1 2 3; 4 7 4]
v = [10 11; 12 13];
y = setsamples(x,[1 3],v)
```

This code sets samples 1 and 3 of cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
v = {[20 21; 22 23] [24 25; 26 27]; [28 29] [30 31]}
y = setsamples(x,[1 3],v)
```

**See Also** `nndata` | `numsamples` | `getsamples` | `catsamples` | `setelements` | `setsignals` | `settimesteps`

**Purpose** Set neural network data signals

**Syntax** `setsignals(x,i,v)`

**Description** `setsignals(x,i,v)` takes these arguments,

|                |                                                  |
|----------------|--------------------------------------------------|
| <code>x</code> | Neural network matrix or cell array data         |
| <code>i</code> | Indices                                          |
| <code>v</code> | Neural network data to store into <code>x</code> |

and returns the original data `x` with the data `v` stored in the signals indicated by the indices `i`.

**Examples** This code sets signal 2 of cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
v = {[20:22] [23:25]}
y = setsignals(x,2,v)
```

**See Also** `nndata` | `numsignals` | `getsignals` | `catsignals` | `setelements` | `setsamples` | `settimesteps`

# setsiminit

---

**Purpose** Set neural network Simulink block initial conditions

**Syntax** `setsiminit(sysName,netName,net,xi,ai,Q)`

**Description** `setsiminit(sysName,netName,net,xi,ai,Q)` takes these arguments,

|                      |                                                                     |
|----------------------|---------------------------------------------------------------------|
| <code>sysName</code> | The name of the Simulink system containing the neural network block |
| <code>netName</code> | The name of the Simulink neural network block                       |
| <code>net</code>     | The original neural network                                         |
| <code>xi</code>      | Initial input delay states                                          |
| <code>ai</code>      | Initial layer delay states                                          |
| <code>Q</code>       | Sample number (default is 1)                                        |

and sets the Simulink neural network blocks initial conditions as specified.

## Examples

Here a NARX network is designed. The NARX network has a standard input and an open loop feedback output to an associated feedback input.

```
[x,t] = simplenarx_dataset;
net = narxnet(1:2,1:2,20);
view(net)
[xs,xi,ai,ts] = preparets(net,x,{},t);
net = train(net,xs,ts,xi,ai);
y = net(xs,xi,ai);
```

Now the network is converted to closed loop, and the data is reformatted to simulate the network's closed loop response.

```
net = closeloop(net);
view(net)
[xs,xi,ai,ts] = preparets(net,x,{},t);
y = net(xs,xi,ai);
```

Here the network is converted to a Simulink system with workspace input and output ports. Its delay states are initialized, inputs X1 defined in the workspace, and it is ready to be simulated in Simulink.

```
[sysName,netName] = gensim(net,'InputMode','Workspace',...
 'OutputMode','WorkSpace','SolverMode','Discrete');
setsiminit(sysName,netName,net,xi,ai,1);
x1 = nndata2sim(x,1,1);
```

Finally the initial input and layer delays are obtained from the Simulink model. (They will be identical to the values set with `setsiminit`.)

```
[xi,ai] = getsiminit(sysName,netName,net);
```

## See Also

`gensim` | `getsiminit` | `nndata2sim` | `sim2nndata`

# settimesteps

---

**Purpose** Set neural network data timesteps

**Syntax** `settimesteps(x,i,v)`

**Description** `settimesteps(x,i,v)` takes these arguments,

|                |                                                  |
|----------------|--------------------------------------------------|
| <code>x</code> | Neural network matrix or cell array data         |
| <code>i</code> | Indices                                          |
| <code>v</code> | Neural network data to store into <code>x</code> |

and returns the original data `x` with the data `v` stored in the timesteps indicated by the indices `i`.

**Examples** This code sets timestep 2 of cell array data:

```
x = {[1:3; 4:6] [7:9; 10:12]; [13:15] [16:18]}
v = {[20:22; 23:25]; [25:27]}
y = settimesteps(x,2,v)
```

**See Also** `nndata` | `numtimesteps` | `gettimesteps` | `cattimesteps` | `setelements` | `setsamples` | `setsignals`



---

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                  |                |                 |                                  |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------|-----------------|----------------------------------|
| <b>Purpose</b>     | Set all network weight and bias values with single vector                                                                                                                                                                                                                                                                                                                                                                                                                                           |                  |                |                 |                                  |
| <b>Syntax</b>      | <code>net = setwb(net,wb)</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                  |                |                 |                                  |
| <b>Description</b> | <p>This function sets a network's weight and biases to a vector of values. <code>net = setwb(net,wb)</code> takes the following inputs:</p> <table><tr><td><code>net</code></td><td>Neural network</td></tr><tr><td><code>wb</code></td><td>Vector of weight and bias values</td></tr></table>                                                                                                                                                                                                      | <code>net</code> | Neural network | <code>wb</code> | Vector of weight and bias values |
| <code>net</code>   | Neural network                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                  |                |                 |                                  |
| <code>wb</code>    | Vector of weight and bias values                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                  |                |                 |                                  |
| <b>Examples</b>    | <p>Here you create a network with a two-element input and one layer of three neurons.</p> <pre>net = feedforwardnet(3);<br/>net = configure(net,[0;0],0);</pre> <p>The network has six weights (3 neurons * 2 input elements) and three biases (3 neurons) for a total of nine weight and bias values. You can set them to random values as follows:</p> <pre>net = setwb(net,rand(9,1));</pre> <p>You can then view the weight and bias values as follows:</p> <pre>net.iw{1,1}<br/>net.b{1}</pre> |                  |                |                 |                                  |
| <b>See Also</b>    | <code>getwb</code>   <code>formwb</code>   <code>separatewb</code>                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |                |                 |                                  |

**Purpose** Simulate neural network

**Syntax**

```
[Y,Xf,Af] = sim(net,X,Xi,Ai,T)
[Y,Xf,Af] = sim(net,{Q TS},Xi,Ai)
[Y,...] = sim(net,...,'useParallel',...)
[Y,...] = sim(net,...,'useGPU',...)
[Y,...] = sim(net,...,'showResources',...)
[Ycomposite,...] = sim(net,Xcomposite,...)
[Ygpu,...] = sim(net,Xgpu,...)
```

**To Get Help** Type help network/sim.

**Description** sim simulates neural networks.

`[Y,Xf,Af] = sim(net,X,Xi,Ai,T)` takes

|     |                                                  |
|-----|--------------------------------------------------|
| net | Network                                          |
| X   | Network inputs                                   |
| Xi  | Initial input delay conditions (default = zeros) |
| Ai  | Initial layer delay conditions (default = zeros) |
| T   | Network targets (default = zeros)                |

and returns

|    |                              |
|----|------------------------------|
| Y  | Network outputs              |
| Xf | Final input delay conditions |
| Xf | Final layer delay conditions |

sim is usually called implicitly by calling the neural network as a function. For instance, these two expressions return the same result:

```
y = sim(net,x,xi,ai)
y = net(x,xi,ai)
```

Note that arguments  $X_i$ ,  $A_i$ ,  $X_f$ , and  $A_f$  are optional and need only be used for networks that have input or layer delays.

The signal arguments can have two formats: cell array or matrix.

The cell array format is easiest to describe. It is most convenient for networks with multiple inputs and outputs, and allows sequences of inputs to be presented:

|       |                             |                                                        |
|-------|-----------------------------|--------------------------------------------------------|
| $X$   | $N_i$ -by- $T_S$ cell array | Each element $X\{i,ts\}$ is an $R_i$ -by- $Q$ matrix.  |
| $X_i$ | $N_i$ -by-ID cell array     | Each element $X_i\{i,k\}$ is an $R_i$ -by- $Q$ matrix. |
| $A_i$ | $N_l$ -by-LD cell array     | Each element $A_i\{i,k\}$ is an $S_i$ -by- $Q$ matrix. |
| $T$   | $N_o$ -by- $T_S$ cell array | Each element $X\{i,ts\}$ is a $U_i$ -by- $Q$ matrix.   |
| $Y$   | $N_o$ -by- $T_S$ cell array | Each element $Y\{i,ts\}$ is a $U_i$ -by- $Q$ matrix.   |
| $X_f$ | $N_i$ -by-ID cell array     | Each element $X_f\{i,k\}$ is an $R_i$ -by- $Q$ matrix. |
| $A_f$ | $N_l$ -by-LD cell array     | Each element $A_f\{i,k\}$ is an $S_i$ -by- $Q$ matrix. |

where

|       |   |                                 |
|-------|---|---------------------------------|
| $N_i$ | = | <code>net.numInputs</code>      |
| $N_l$ | = | <code>net.numLayers</code>      |
| $N_o$ | = | <code>net.numOutputs</code>     |
| $D$   | = | <code>net.numInputDelays</code> |

LD = net.numLayerDelays  
TS = Number of time steps  
Q = Batch size  
Ri = net.inputs{i}.size  
Si = net.layers{i}.size  
Ui = net.outputs{i}.size

The columns of Xi, Ai, Xf, and Af are ordered from oldest delay condition to most recent:

$X_{i\{i,k\}}$  = Input i at time  $ts = k - ID$   
 $X_{f\{i,k\}}$  = Input i at time  $ts = TS + k - ID$   
 $A_{i\{i,k\}}$  = Layer output i at time  $ts = k - LD$   
 $A_{f\{i,k\}}$  = Layer output i at time  $ts = TS + k - LD$

The matrix format can be used if only one time step is to be simulated ( $TS = 1$ ). It is convenient for networks with only one input and output, but can also be used with networks that have more.

Each matrix argument is found by storing the elements of the corresponding cell array argument in a single matrix:

X (sum of Ri)-by-Q matrix  
Xi (sum of Ri)-by-(ID\*Q) matrix  
Ai (sum of Si)-by-(LD\*Q) matrix

T (sum of Ui)-by-Q matrix  
Y (sum of Ui)-by-Q matrix

Xf (sum of Ri)-by-(ID\*Q) matrix  
 Af (sum of Si)-by-(LD\*Q) matrix

`[Y,Xf,Af] = sim(net,{Q TS},Xi,Ai)` is used for networks that do not have an input, such as Hopfield networks, when cell array notation is used.

`[Y,...] = sim(net,...,'useParallel',...),`  
`[Y,...] = sim(net,...,'useGPU',...),` or `[Y,...] = sim(net,...,'showResources',...)` (or the network called as a function) accepts optional name/value pair arguments to control how calculations are performed. Two of these options allow training to happen faster or on larger datasets using parallel workers or GPU devices if Parallel Computing Toolbox is available. These are the optional name/value pairs:

- 'useParallel', 'no' Calculations occur on normal MATLAB thread. This is the default 'useParallel' setting.
- 'useParallel', 'yes' Calculations occur on parallel workers if a MATLAB pool is open. Otherwise calculations occur on the normal MATLAB thread.
- 'useGPU', 'no' Calculations occur on the CPU. This is the default 'useGPU' setting.
- 'useGPU', 'yes' Calculations occur on the current `gpuDevice` if it is a supported GPU (See Parallel Computing Toolbox for GPU requirements.) If the current `gpuDevice` is not supported, calculations remain on the CPU. If 'useParallel' is also 'yes' and a MATLAB pool is open, then each worker with a unique GPU uses that GPU, other workers run calculations on their respective CPU cores.

'useGPU', 'only' If no MATLAB pool is open, then this setting is the same as 'yes'. If a MATLAB pool is open, then only workers with unique GPUs are used. However, if a MATLAB pool is open, but no supported GPUs are available, then calculations revert to performing on all worker CPUs.

'showResources' Do not display computing resources used at the command line. This is the default setting.

'showResources' Show at the command line a summary of the computing resources actually used. The actual resources may differ from the requested resources, if parallel or GPU computing is requested but a MATLAB pool is not open or a supported GPU is not available. When parallel workers are used, each worker's computation mode is described, including workers in the pool that are not used.

[Ycomposite,...] = sim(net,Xcomposite,...) takes Composite data and returns Composite results. If Composite data is used, then 'useParallel' is automatically set to 'yes'.

[Ygpu,...] = sim(net,Xgpu,...) takes gpuArray data and returns gpuArray results. If gpuArray data is used, then 'useGPU' is automatically set to 'yes'.

## Examples

In the following examples, the `sim` function is called implicitly by calling the neural network object (`net`) as a function.

### Simulate Feedforward Networks

This example loads a dataset that maps neighborhood characteristics, `x`, to median house prices, `t`. A feedforward network with 10 neurons is created and trained on that data, then simulated.

```
[x,t] = house_dataset;
net = feedforwardnet(10);
net = train(net,x,t);
```

```
y = net(x);
```

### **Simulate NARX Time Series Networks**

This example trains an open-loop nonlinear-autoregressive network with external input, to model a levitated magnet system defined by a control current  $x$  and the magnet's vertical position response  $t$ , then simulates the network. The function `preparets` prepares the data before training and simulation. It creates the open-loop network's combined inputs  $xo$ , which contains both the external input  $x$  and previous values of position  $t$ . It also prepares the delay states  $xi$ .

```
[x,t] = maglev_dataset;
net = narxnet(10);
[xo,xi,~,to] = preparets(net,x,{},t);
net = train(net,xo,to,xi);
y = net(xo,xi)
```

This same system can also be simulated in closed-loop form.

```
netc = closeloop(net);
view(netc)
[xc,xi,ai,tc] = preparets(netc,x,{},t);
yc = netc(xc,xi,ai);
```

### **Simulate in Parallel on a MATLAB Pool**

Parallel Computing Toolbox allows Neural Network Toolbox to simulate and train networks faster and on larger datasets than can fit on one PC. Here training and simulation happens across parallel MATLAB workers.

```
matlabpool open
[X,T] = vinyl_dataset;
net = feedforwardnet(10);
net = train(net,X,T,'useParallel','yes','showResources','yes');
Y = net(X,'useParallel','yes');
```

### **Simulate on GPUs**

Use Composite values to distribute the data manually, and get back the results as a Composite value. If the data is loaded as it is distributed, then while each piece of the dataset must fit in RAM, the entire dataset is limited only by the total RAM of all the workers.

```
Xc = Composite;
for i=1:numel(Xc)
 Xc{i} = X+rand(size(X))*0.1; % Use real data instead of random
end
Yc = net(Xc, 'showResources', 'yes');
```

Networks can be simulated using the current GPU device, if it is supported by Parallel Computing Toolbox.

```
gpuDevice % Check if there is a supported GPU
Y = net(X, 'useGPU', 'yes', 'showResources', 'yes');
```

To put the data on a GPU manually, and get the results on the GPU:

```
Xgpu = gpuArray(X);
Ygpu = net(Xgpu, 'showResources', 'yes');
Y = gather(Ygpu);
```

To run in parallel, with workers associated with unique GPUs taking advantage of that hardware, while the rest of the workers use CPUs:

```
Y = net(X, 'useParallel', 'yes', 'useGPU', 'yes', 'showResources', 'yes');
```

Using only workers with unique GPUs might result in higher speeds, as CPU workers might not keep up.

```
Y = net(X, 'useParallel', 'yes', 'useGPU', 'only', 'showResources', 'yes');
```

### **Algorithms**

`sim` uses these properties to simulate a network `net`.

```
net.numInputs, net.numLayers
net.outputConnect, net.biasConnect
net.inputConnect, net.layerConnect
```



---

These properties determine the network's weight and bias values and the number of delays associated with each weight:

```
net.IW{i,j}
net.LW{i,j}
net.b{i}
net.inputWeights{i,j}.delays
net.layerWeights{i,j}.delays
```

These function properties indicate how `sim` applies weight and bias values to inputs to get each layer's output:

```
net.inputWeights{i,j}.weightFcn
net.layerWeights{i,j}.weightFcn
net.layers{i}.netInputFcn
net.layers{i}.transferFcn
```

## See Also

`init` | `adapt` | `train` | `revert`

# sim2nndata

---

**Purpose** Convert Simulink time series to neural network data

**Syntax** `sim2nndata(x)`

**Description** `sim2nndata(x)` takes either a column vector of values or a Simulink time series structure and converts it to a neural network data time series.

**Examples** Here a random Simulink 20-step time series is created and converted.

```
simts = rands(20,1);
nnts = sim2nndata(simts)
```


Here a similar time series is defined with a Simulink structure and converted.

```
simts.time = 0:19
simts.signals.values = rands(20,1);
simts.dimensions = 1;
nnts = sim2nndata(simts)
```

**See Also** `nndata` | `nndata2sim`

**Purpose**

Soft max transfer function

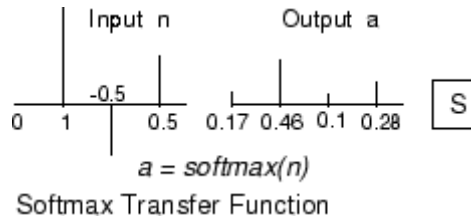**Graph and Symbol****Syntax** $A = \text{softmax}(N, FP)$ **Description**

`softmax` is a neural transfer function. Transfer functions calculate a layer's output from its net input.

$A = \text{softmax}(N, FP)$  takes  $N$  and optional function parameters,

$N$                        $S$ -by- $Q$  matrix of net input (column) vectors

$FP$                      Struct of function parameters (ignored)

and returns  $A$ , the  $S$ -by- $Q$  matrix of the softmax competitive function applied to each column of  $N$ .

`info = softmax('code')` returns information about this function.

The following codes are defined:

`softmax('name')` returns the name of this function.

`softmax('output',FP)` returns the [min max] output range.

`softmax('active',FP)` returns the [min max] active input range.

`softmax('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is  $S$ -by- $S$ -by- $Q$  or  $S$ -by- $Q$ .

`softmax('fpnames')` returns the names of the function parameters.

`softmax('fpdefaults')` returns the default function parameters.

# softmax

---

## Examples

Here you define a net input vector  $N$ , calculate the output, and plot both with bar graphs.

```
n = [0; 1; -0.5; 0.5];
a = softmax(n);
subplot(2,1,1), bar(n), ylabel('n')
subplot(2,1,2), bar(a), ylabel('a')
```

Assign this transfer function to layer  $i$  of a network.

```
net.layers{i}.transferFcn = 'softmax';
```

## Algorithms

```
a = softmax(n) = exp(n)/sum(exp(n))
```

## See Also

```
sim | compet
```

**Purpose** 1-D minimization using backtracking

**Syntax** `[a,gX,perf,retcode,delta,tol] = srchbac(net,X,Pd,Tl,Ai,Q,TS,dX,gX,perf,dperf,delta,TOL,ch_perf)`

**Description** srchbac is a linear search routine. It searches in a given direction to locate the minimum of the performance function in that direction. It uses a technique called backtracking.

`[a,gX,perf,retcode,delta,tol] = srchbac(net,X,Pd,Tl,Ai,Q,TS,dX,gX,perf,dperf,delta,TOL,ch_perf)` takes these inputs,

|         |                                                            |
|---------|------------------------------------------------------------|
| net     | Neural network                                             |
| X       | Vector containing current values of weights and biases     |
| Pd      | Delayed input vectors                                      |
| Tl      | Layer target vectors                                       |
| Ai      | Initial input delay conditions                             |
| Q       | Batch size                                                 |
| TS      | Time steps                                                 |
| dX      | Search direction vector                                    |
| gX      | Gradient vector                                            |
| perf    | Performance value at current X                             |
| dperf   | Slope of performance value at current X in direction of dX |
| delta   | Initial step size                                          |
| tol     | Tolerance on search                                        |
| ch_perf | Change in performance on previous step                     |

and returns

|         |                                                                                                                                                                                                                                                                                                                                                                                   |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a       | Step size that minimizes performance                                                                                                                                                                                                                                                                                                                                              |
| gX      | Gradient at new minimum point                                                                                                                                                                                                                                                                                                                                                     |
| perf    | Performance value at new minimum point                                                                                                                                                                                                                                                                                                                                            |
| retcode | Return code that has three elements. The first two elements correspond to the number of function evaluations in the two stages of the search. The third element is a return code. These have different meanings for different search algorithms. Some might not be used in this function.<br>0 Normal<br>1 Minimum step taken<br>2 Maximum step taken<br>3 Beta condition not met |
| delta   | New initial step size, based on the current step size                                                                                                                                                                                                                                                                                                                             |
| tol     | New tolerance on search                                                                                                                                                                                                                                                                                                                                                           |

Parameters used for the backstepping algorithm are

|         |                                                           |
|---------|-----------------------------------------------------------|
| alpha   | Scale factor that determines sufficient reduction in perf |
| beta    | Scale factor that determines sufficiently large step size |
| low_lim | Lower limit on change in step size                        |
| up_lim  | Upper limit on change in step size                        |
| maxstep | Maximum step length                                       |

|                        |                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <code>minstep</code>   | Minimum step length                                                                                                   |
| <code>scale_tol</code> | Parameter that relates the tolerance <code>tol</code> to the initial step size <code>delta</code> , usually set to 20 |

The defaults for these parameters are set in the training function that calls them. See `traincgf`, `traincgb`, `traincgp`, `trainbfg`, and `trainoss`.

Dimensions for these variables are

|                 |                           |                                                          |
|-----------------|---------------------------|----------------------------------------------------------|
| <code>Pd</code> | No-by-Ni-by-TS cell array | Each element $P\{i, j, ts\}$ is a $D_{ij}$ -by-Q matrix. |
| <code>Tl</code> | Nl-by-TS cell array       | Each element $P\{i, ts\}$ is a $V_i$ -by-Q matrix.       |
| <code>V</code>  | Nl-by-LD cell array       | Each element $A_i\{i, k\}$ is an $S_i$ -by-Q matrix.     |

where

|                  |   |                                                        |
|------------------|---|--------------------------------------------------------|
| <code>Ni</code>  | = | <code>net.numInputs</code>                             |
| <code>Nl</code>  | = | <code>net.numLayers</code>                             |
| <code>LD</code>  | = | <code>net.numLayerDelays</code>                        |
| <code>Ri</code>  | = | <code>net.inputs{i}.size</code>                        |
| <code>Si</code>  | = | <code>net.layers{i}.size</code>                        |
| <code>Vi</code>  | = | <code>net.targets{i}.size</code>                       |
| <code>Dij</code> | = | <code>Ri * length(net.inputWeights{i,j}.delays)</code> |

## Examples

Here is a problem consisting of inputs `p` and targets `t` to be solved with a network.

```
p = [0 1 2 3 4 5];
t = [0 0 0 1 1 1];
```

A two-layer feed-forward network is created. The network's input ranges from [0 to 10]. The first layer has two `tansig` neurons, and the second layer has one `logsig` neuron. The `traincgf` network training function and the `srchbac` search function are to be used.

## Create and Test a Network

```
net = newff([0 5],[2 1],{'tansig','logsig'},'traincgf');
a = sim(net,p)
```

## Train and Retest the Network

```
net.trainParam.searchFcn = 'srchbac';
net.trainParam.epochs = 50;
net.trainParam.show = 10;
net.trainParam.goal = 0.1;
net = train(net,p,t);
a = sim(net,p)
```

## Network Use

You can create a standard network that uses `srchbac` with `newff`, `newcf`, or `newelm`.

To prepare a custom network to be trained with `traincgf`, using the line search function `srchbac`,

- 1 Set `net.trainFcn` to `'traincgf'`. This sets `net.trainParam` to `traincgf`'s default parameters.
- 2 Set `net.trainParam.searchFcn` to `'srchbac'`.

The `srchbac` function can be used with any of the following training functions: `traincgf`, `traincgb`, `traincgp`, `trainbfg`, `trainoss`.



- 
- Algorithms**      srchbac locates the minimum of the performance function in the search direction  $dX$ , using the backtracking algorithm described on page 126 and 328 of Dennis and Schnabel's book, noted below.
- References**      Dennis, J.E., and R.B. Schnabel, *Numerical Methods for Unconstrained Optimization and Nonlinear Equations*, Englewood Cliffs, NJ, Prentice-Hall, 1983
- Definitions**      The backtracking search routine srchbac is best suited to use with the quasi-Newton optimization algorithms. It begins with a step multiplier of 1 and then backtracks until an acceptable reduction in the performance is obtained. On the first step it uses the value of performance at the current point and a step multiplier of 1. It also uses the value of the derivative of performance at the current point to obtain a quadratic approximation to the performance function along the search direction. The minimum of the quadratic approximation becomes a tentative optimum point (under certain conditions) and the performance at this point is tested. If the performance is not sufficiently reduced, a cubic interpolation is obtained and the minimum of the cubic interpolation becomes the new tentative optimum point. This process is continued until a sufficient reduction in the performance is obtained.
- The backtracking algorithm is described in Dennis and Schnabel. It is used as the default line search for the quasi-Newton algorithms, although it might not be the best technique for all problems.
- See Also**          srchcha | srchgol | srchhyb

# srchbre

---

**Purpose** 1-D interval location using Brent's method

**Syntax** `[a,gX,perf,retcode,delta,tol] = srchbre(net,X,Pd,Tl,Ai,Q,TS,dX,gX,perf,dperf,delta,tol,ch_perf)`

**Description** `srchbre` is a linear search routine. It searches in a given direction to locate the minimum of the performance function in that direction. It uses a technique called Brent's technique.

`[a,gX,perf,retcode,delta,tol] = srchbre(net,X,Pd,Tl,Ai,Q,TS,dX,gX,perf,dperf,delta,tol,ch_perf)` takes these inputs,

|                      |                                                                                      |
|----------------------|--------------------------------------------------------------------------------------|
| <code>net</code>     | Neural network                                                                       |
| <code>X</code>       | Vector containing current values of weights and biases                               |
| <code>Pd</code>      | Delayed input vectors                                                                |
| <code>Tl</code>      | Layer target vectors                                                                 |
| <code>Ai</code>      | Initial input delay conditions                                                       |
| <code>Q</code>       | Batch size                                                                           |
| <code>TS</code>      | Time steps                                                                           |
| <code>dX</code>      | Search direction vector                                                              |
| <code>gX</code>      | Gradient vector                                                                      |
| <code>perf</code>    | Performance value at current <code>X</code>                                          |
| <code>dperf</code>   | Slope of performance value at current <code>X</code> in direction of <code>dX</code> |
| <code>delta</code>   | Initial step size                                                                    |
| <code>tol</code>     | Tolerance on search                                                                  |
| <code>ch_perf</code> | Change in performance on previous step                                               |

and returns

|                      |                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>a</code>       | Step size that minimizes performance                                                                                                                                                                                                                                                                                                                                              |
| <code>gX</code>      | Gradient at new minimum point                                                                                                                                                                                                                                                                                                                                                     |
| <code>perf</code>    | Performance value at new minimum point                                                                                                                                                                                                                                                                                                                                            |
| <code>retcode</code> | Return code that has three elements. The first two elements correspond to the number of function evaluations in the two stages of the search. The third element is a return code. These have different meanings for different search algorithms. Some might not be used in this function.<br>0 Normal<br>1 Minimum step taken<br>2 Maximum step taken<br>3 Beta condition not met |
| <code>delta</code>   | New initial step size, based on the current step size                                                                                                                                                                                                                                                                                                                             |
| <code>tol</code>     | New tolerance on search                                                                                                                                                                                                                                                                                                                                                           |

Parameters used for the Brent algorithm are

|                        |                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <code>alpha</code>     | Scale factor that determines sufficient reduction in <code>perf</code>                                                |
| <code>beta</code>      | Scale factor that determines sufficiently large step size                                                             |
| <code>bmax</code>      | Largest step size                                                                                                     |
| <code>scale_tol</code> | Parameter that relates the tolerance <code>tol</code> to the initial step size <code>delta</code> , usually set to 20 |

The defaults for these parameters are set in the training function that calls them. See `traincgf`, `traincgb`, `traincgp`, `trainbfg`, and `trainoss`.

Dimensions for these variables are

|                 |                                        |                                                                        |
|-----------------|----------------------------------------|------------------------------------------------------------------------|
| <code>Pd</code> | <code>No-by-Ni-by-TS</code> cell array | Each element <code>P{i,j,ts}</code> is a <code>Dij-by-Q</code> matrix. |
| <code>Tl</code> | <code>Nl-by-TS</code> cell array       | Each element <code>P{i,ts}</code> is a <code>Vi-by-Q</code> matrix.    |
| <code>Ai</code> | <code>Nl-by-LD</code> cell array       | Each element <code>Ai{i,k}</code> is an <code>Si-by-Q</code> matrix.   |

where

|                  |   |                                                        |
|------------------|---|--------------------------------------------------------|
| <code>Ni</code>  | = | <code>net.numInputs</code>                             |
| <code>Nl</code>  | = | <code>net.numLayers</code>                             |
| <code>LD</code>  | = | <code>net.numLayerDelays</code>                        |
| <code>Ri</code>  | = | <code>net.inputs{i}.size</code>                        |
| <code>Si</code>  | = | <code>net.layers{i}.size</code>                        |
| <code>Vi</code>  | = | <code>net.targets{i}.size</code>                       |
| <code>Dij</code> | = | <code>Ri * length(net.inputWeights{i,j}.delays)</code> |

## Examples

Here is a problem consisting of inputs `p` and targets `t` to be solved with a network.

```
p = [0 1 2 3 4 5];
t = [0 0 0 1 1 1];
```

A two-layer feed-forward network is created. The network's input ranges from [0 to 10]. The first layer has two `tansig` neurons,

and the second layer has one `logsig` neuron. The `traincgf` network training function and the `srchbac` search function are to be used.

### Create and Test a Network

```
net = newff([0 5],[2 1],{'tansig','logsig'},'traincgf');
a = sim(net,p)
```

### Train and Retest the Network

```
net.trainParam.searchFcn = 'srchbre';
net.trainParam.epochs = 50;
net.trainParam.show = 10;
net.trainParam.goal = 0.1;
net = train(net,p,t);
a = sim(net,p)
```

## Network Use

You can create a standard network that uses `srchbre` with `newff`, `newcf`, or `newelm`. To prepare a custom network to be trained with `traincgf`, using the line search function `srchbre`,

- 1 Set `net.trainFcn` to `'traincgf'`. This sets `net.trainParam` to `traincgf`'s default parameters.
- 2 Set `net.trainParam.searchFcn` to `'srchbre'`.

The `srchbre` function can be used with any of the following training functions: `traincgf`, `traincgb`, `traincgp`, `trainbfg`, `trainoss`.

## Algorithms

`srchbre` brackets the minimum of the performance function in the search direction  $dX$ , using Brent's algorithm, described on page 46 of Scales (see reference below). It is a hybrid algorithm based on the golden section search and the quadratic approximation.

## References

Scales, L.E., *Introduction to Non-Linear Optimization*, New York, Springer-Verlag, 1985

## Definitions

Brent's search is a linear search that is a hybrid of the golden section search and a quadratic interpolation. Function comparison methods, like the golden section search, have a first-order rate of convergence, while polynomial interpolation methods have an asymptotic rate that is faster than superlinear. On the other hand, the rate of convergence for the golden section search starts when the algorithm is initialized, whereas the asymptotic behavior for the polynomial interpolation methods can take many iterations to become apparent. Brent's search attempts to combine the best features of both approaches.

For Brent's search, you begin with the same interval of uncertainty used with the golden section search, but some additional points are computed. A quadratic function is then fitted to these points and the minimum of the quadratic function is computed. If this minimum is within the appropriate interval of uncertainty, it is used in the next stage of the search and a new quadratic approximation is performed. If the minimum falls outside the known interval of uncertainty, then a step of the golden section search is performed.

See [Bren73] for a complete description of this algorithm. This algorithm has the advantage that it does not require computation of the derivative. The derivative computation requires a backpropagation through the network, which involves more computation than a forward pass. However, the algorithm can require more performance evaluations than algorithms that use derivative information.

## See Also

srchbac | srchcha | srchgo1 | srchhyb

**Purpose** 1-D minimization using Charalambous' method

**Syntax** `[a,gX,perf,retcode,delta,tol] = srchcha(net,X,Pd,Tl,Ai,Q,TS,  
dX,gX,perf,dperf,delta,tol,ch_perf)`

**Description** srchcha is a linear search routine. It searches in a given direction to locate the minimum of the performance function in that direction. It uses a technique based on Charalambous' method.

`[a,gX,perf,retcode,delta,tol] =  
srchcha(net,X,Pd,Tl,Ai,Q,TS,dX,gX,perf,dperf,delta,tol,ch_perf)`  
takes these inputs,

|         |                                                            |
|---------|------------------------------------------------------------|
| net     | Neural network                                             |
| X       | Vector containing current values of weights and biases     |
| Pd      | Delayed input vectors                                      |
| Tl      | Layer target vectors                                       |
| Ai      | Initial input delay conditions                             |
| Q       | Batch size                                                 |
| TS      | Time steps                                                 |
| dX      | Search direction vector                                    |
| gX      | Gradient vector                                            |
| perf    | Performance value at current X                             |
| dperf   | Slope of performance value at current X in direction of dX |
| delta   | Initial step size                                          |
| tol     | Tolerance on search                                        |
| ch_perf | Change in performance on previous step                     |

and returns

|                      |                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>a</code>       | Step size that minimizes performance                                                                                                                                                                                                                                                                                                                                              |
| <code>gX</code>      | Gradient at new minimum point                                                                                                                                                                                                                                                                                                                                                     |
| <code>perf</code>    | Performance value at new minimum point                                                                                                                                                                                                                                                                                                                                            |
| <code>retcode</code> | Return code that has three elements. The first two elements correspond to the number of function evaluations in the two stages of the search. The third element is a return code. These have different meanings for different search algorithms. Some might not be used in this function.<br>0 Normal<br>1 Minimum step taken<br>2 Maximum step taken<br>3 Beta condition not met |
| <code>delta</code>   | New initial step size, based on the current step size                                                                                                                                                                                                                                                                                                                             |
| <code>tol</code>     | New tolerance on search                                                                                                                                                                                                                                                                                                                                                           |

Parameters used for the Charalambous algorithm are

|                        |                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <code>alpha</code>     | Scale factor that determines sufficient reduction in <code>perf</code>                                                |
| <code>beta</code>      | Scale factor that determines sufficiently large step size                                                             |
| <code>gama</code>      | Parameter to avoid small reductions in performance, usually set to 0.1                                                |
| <code>scale_tol</code> | Parameter that relates the tolerance <code>tol</code> to the initial step size <code>delta</code> , usually set to 20 |



The defaults for these parameters are set in the training function that calls them. See `traincgf`, `traincgb`, `traincgp`, `trainbfg`, and `trainoss`.

Dimensions for these variables are

|                 |                           |                                                          |
|-----------------|---------------------------|----------------------------------------------------------|
| <code>Pd</code> | No-by-Ni-by-TS cell array | Each element $P\{i, j, ts\}$ is a $D_{ij}$ -by-Q matrix. |
| <code>Tl</code> | Nl-by-TS cell array       | Each element $P\{i, ts\}$ is a $V_i$ -by-Q matrix.       |
| <code>Ai</code> | Nl-by-LD cell array       | Each element $A_i\{i, k\}$ is an $S_i$ -by-Q matrix.     |

where

|                  |   |                                                         |
|------------------|---|---------------------------------------------------------|
| <code>Ni</code>  | = | <code>net.numInputs</code>                              |
| <code>Nl</code>  | = | <code>net.numLayers</code>                              |
| <code>LD</code>  | = | <code>net.numLayerDelays</code>                         |
| <code>Ri</code>  | = | <code>net.inputs{i}.size</code>                         |
| <code>Si</code>  | = | <code>net.layers{i}.size</code>                         |
| <code>Vi</code>  | = | <code>net.targets{i}.size</code>                        |
| <code>Dij</code> | = | <code>Ri * length(net.inputWeights{i, j}.delays)</code> |

## Examples

Here is a problem consisting of inputs `p` and targets `t` to be solved with a network.

```
p = [0 1 2 3 4 5];
t = [0 0 0 1 1 1];
```

A two-layer feed-forward network is created. The network's input ranges from [0 to 10]. The first layer has two `tansig` neurons, and the second layer has one `logsig` neuron. The `traincgf` network training function and the `srchcha` search function are to be used.

## Create and Test a Network

```
net = newff([0 5],[2 1],{'tansig','logsig'},'traincgf');
a = sim(net,p)
```

## Train and Retest the Network

```
net.trainParam.searchFcn = 'srchcha';
net.trainParam.epochs = 50;
net.trainParam.show = 10;
net.trainParam.goal = 0.1;
net = train(net,p,t);
a = sim(net,p)
```

## Network Use

You can create a standard network that uses `srchcha` with `newff`, `newcf`, or `newelm`.

To prepare a custom network to be trained with `traincgf`, using the line search function `srchcha`,

- 1 Set `net.trainFcn` to `'traincgf'`. This sets `net.trainParam` to `traincgf`'s default parameters.
- 2 Set `net.trainParam.searchFcn` to `'srchcha'`.

The `srchcha` function can be used with any of the following training functions: `traincgf`, `traincgb`, `traincgp`, `trainbfg`, `trainoss`.

## Algorithms

`srchcha` locates the minimum of the performance function in the search direction `dX`, using an algorithm based on the method described in Charalambous (see reference below).

**References**

Charalambous, C., “Conjugate gradient algorithm for efficient training of artificial neural networks,” *IEEE Proceedings*, Vol. 139, No. 3, June, 1992, pp. 301–310.

**Definitions**

The method of Charalambous, `srchcha`, was designed to be used in combination with a conjugate gradient algorithm for neural network training. Like `srchbre` and `srchhyb`, it is a hybrid search. It uses a cubic interpolation together with a type of sectioning.

See [Char92] for a description of Charalambous’ search. This routine is used as the default search for most of the conjugate gradient algorithms because it appears to produce excellent results for many different problems. It does require the computation of the derivatives (backpropagation) in addition to the computation of performance, but it overcomes this limitation by locating the minimum with fewer steps. This is not true for all problems, and you might want to experiment with other line searches.

**See Also**

`srchbac` | `srchbre` | `srchg01` | `srchhyb`

# srchgol

---

**Purpose** 1-D minimization using golden section search

**Syntax** `[a,gX,perf,retcode,delta,tol] = srchgol(net,X,Pd,Tl,Ai,Q,TS,dX,gX,perf,dperf,delta,tol,ch_perf)`

**Description** `srchgol` is a linear search routine. It searches in a given direction to locate the minimum of the performance function in that direction. It uses a technique called the golden section search.

`[a,gX,perf,retcode,delta,tol] = srchgol(net,X,Pd,Tl,Ai,Q,TS,dX,gX,perf,dperf,delta,tol,ch_perf)` takes these inputs,

|                      |                                                                                      |
|----------------------|--------------------------------------------------------------------------------------|
| <code>net</code>     | Neural network                                                                       |
| <code>X</code>       | Vector containing current values of weights and biases                               |
| <code>Pd</code>      | Delayed input vectors                                                                |
| <code>Tl</code>      | Layer target vectors                                                                 |
| <code>Ai</code>      | Initial input delay conditions                                                       |
| <code>Q</code>       | Batch size                                                                           |
| <code>TS</code>      | Time steps                                                                           |
| <code>dX</code>      | Search direction vector                                                              |
| <code>gX</code>      | Gradient vector                                                                      |
| <code>perf</code>    | Performance value at current <code>X</code>                                          |
| <code>dperf</code>   | Slope of performance value at current <code>X</code> in direction of <code>dX</code> |
| <code>delta</code>   | Initial step size                                                                    |
| <code>tol</code>     | Tolerance on search                                                                  |
| <code>ch_perf</code> | Change in performance on previous step                                               |

and returns

|                      |                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>a</code>       | Step size that minimizes performance                                                                                                                                                                                                                                                                                                                                                  |
| <code>gX</code>      | Gradient at new minimum point                                                                                                                                                                                                                                                                                                                                                         |
| <code>perf</code>    | Performance value at new minimum point                                                                                                                                                                                                                                                                                                                                                |
| <code>retcode</code> | Return code that has three elements. The first two elements correspond to the number of function evaluations in the two stages of the search. The third element is a return code. These have different meanings for different search algorithms. Some might not be used in this function.<br><br>0 Normal<br>1 Minimum step taken<br>2 Maximum step taken<br>3 Beta condition not met |
| <code>delta</code>   | New initial step size, based on the current step size                                                                                                                                                                                                                                                                                                                                 |
| <code>tol</code>     | New tolerance on search                                                                                                                                                                                                                                                                                                                                                               |

Parameters used for the golden section algorithm are

|                        |                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <code>alpha</code>     | Scale factor that determines sufficient reduction in <code>perf</code>                                                |
| <code>bmax</code>      | Largest step size                                                                                                     |
| <code>scale_tol</code> | Parameter that relates the tolerance <code>tol</code> to the initial step size <code>delta</code> , usually set to 20 |

The defaults for these parameters are set in the training function that calls them. See `traincgf`, `traincgb`, `traincgp`, `trainbfg`, and `trainoss`.

Dimensions for these variables are

|                 |                           |                                                                                       |
|-----------------|---------------------------|---------------------------------------------------------------------------------------|
| <code>Pd</code> | No-by-Ni-by-TS cell array | Each element <code>P{i,j,ts}</code> is a <code>Dij</code> -by- <code>Q</code> matrix. |
| <code>Tl</code> | Nl-by-TS cell array       | Each element <code>P{i,ts}</code> is a <code>Vi</code> -by- <code>Q</code> matrix.    |
| <code>Ai</code> | Nl-by-LD cell array       | Each element <code>Ai{i,k}</code> is an <code>Si</code> -by- <code>Q</code> matrix.   |

where

|                  |   |                                                        |
|------------------|---|--------------------------------------------------------|
| <code>Ni</code>  | = | <code>net.numInputs</code>                             |
| <code>Nl</code>  | = | <code>net.numLayers</code>                             |
| <code>LD</code>  | = | <code>net.numLayerDelays</code>                        |
| <code>Ri</code>  | = | <code>net.inputs{i}.size</code>                        |
| <code>Si</code>  | = | <code>net.layers{i}.size</code>                        |
| <code>Vi</code>  | = | <code>net.targets{i}.size</code>                       |
| <code>Dij</code> | = | <code>Ri * length(net.inputWeights{i,j}.delays)</code> |

## Examples

Here is a problem consisting of inputs `p` and targets `t` to be solved with a network.

```
p = [0 1 2 3 4 5];
t = [0 0 0 1 1 1];
```

A two-layer feed-forward network is created. The network's input ranges from [0 to 10]. The first layer has two `tansig` neurons,

and the second layer has one logsig neuron. The `traincgf` network training function and the `srchgol` search function are to be used.

### Create and Test a Network

```
net = newff([0 5],[2 1],{'tansig','logsig'},'traincgf');
a = sim(net,p)
```

### Train and Retest the Network

```
net.trainParam.searchFcn = 'srchgol';
net.trainParam.epochs = 50;
net.trainParam.show = 10;
net.trainParam.goal = 0.1;
net = train(net,p,t);
a = sim(net,p)
```

## Network Use

You can create a standard network that uses `srchgol` with `newff`, `newcf`, or `newelm`.

To prepare a custom network to be trained with `traincgf`, using the line search function `srchgol`,

- 1 Set `net.trainFcn` to `'traincgf'`. This sets `net.trainParam` to `traincgf`'s default parameters.
- 2 Set `net.trainParam.searchFcn` to `'srchgol'`.

The `srchgol` function can be used with any of the following training functions: `traincgf`, `traincgb`, `traincgp`, `trainbfg`, `trainoss`.

## Algorithms

`srchgol` locates the minimum of the performance function in the search direction  $dX$ , using the golden section search. It is based on the algorithm as described on page 33 of Scales (see reference below).

## References

Scales, L.E., *Introduction to Non-Linear Optimization*, New York, Springer-Verlag, 1985

## Definitions

The golden section search `srchgol` is a linear search that does not require the calculation of the slope. This routine begins by locating an interval in which the minimum of the performance function occurs. This is accomplished by evaluating the performance at a sequence of points, starting at a distance of `delta` and doubling in distance each step, along the search direction. When the performance increases between two successive iterations, a minimum has been bracketed. The next step is to reduce the size of the interval containing the minimum. Two new points are located within the initial interval. The values of the performance at these two points determine a section of the interval that can be discarded, and a new interior point is placed within the new interval. This procedure is continued until the interval of uncertainty is reduced to a width of `tol`, which is equal to `delta/scale_tol`.

See [HDB96], starting on page 12-16, for a complete description of the golden section search. Try the *Neural Network Design* demonstration `nnd12sd1` [HDB96] for an illustration of the performance of the golden section search in combination with a conjugate gradient algorithm.

## See Also

`srchbac` | `srchbre` | `srchcha` | `srchhyb`



**Purpose**

1-D minimization using a hybrid bisection-cubic search

**Syntax**

```
[a,gX,perf,retcode,delta,tol] = srchhyb(net,X,Pd,Tl,Ai,Q,TS,
 dX,gX,perf,dperf,delta,tol,ch_perf)
```

**Description**

srchhyb is a linear search routine. It searches in a given direction to locate the minimum of the performance function in that direction. It uses a technique that is a combination of a bisection and a cubic interpolation.

```
[a,gX,perf,retcode,delta,tol] =
srchhyb(net,X,Pd,Tl,Ai,Q,TS,dX,gX,perf,dperf,delta,tol,ch_perf)
```

takes these inputs,

|         |                                                            |
|---------|------------------------------------------------------------|
| net     | Neural network                                             |
| X       | Vector containing current values of weights and biases     |
| Pd      | Delayed input vectors                                      |
| Tl      | Layer target vectors                                       |
| Ai      | Initial input delay conditions                             |
| Q       | Batch size                                                 |
| TS      | Time steps                                                 |
| dX      | Search direction vector                                    |
| gX      | Gradient vector                                            |
| perf    | Performance value at current X                             |
| dperf   | Slope of performance value at current X in direction of dX |
| delta   | Initial step size                                          |
| tol     | Tolerance on search                                        |
| ch_perf | Change in performance on previous step                     |

and returns

|                      |                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>a</code>       | Step size that minimizes performance                                                                                                                                                                                                                                                                                                                                                  |
| <code>gX</code>      | Gradient at new minimum point                                                                                                                                                                                                                                                                                                                                                         |
| <code>perf</code>    | Performance value at new minimum point                                                                                                                                                                                                                                                                                                                                                |
| <code>retcode</code> | Return code that has three elements. The first two elements correspond to the number of function evaluations in the two stages of the search. The third element is a return code. These have different meanings for different search algorithms. Some might not be used in this function.<br><br>0 Normal<br>1 Minimum step taken<br>2 Maximum step taken<br>3 Beta condition not met |
| <code>delta</code>   | New initial step size, based on the current step size                                                                                                                                                                                                                                                                                                                                 |
| <code>tol</code>     | New tolerance on search                                                                                                                                                                                                                                                                                                                                                               |

Parameters used for the hybrid bisection-cubic algorithm are

|                        |                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <code>alpha</code>     | Scale factor that determines sufficient reduction in <code>perf</code>                                                |
| <code>beta</code>      | Scale factor that determines sufficiently large step size                                                             |
| <code>bmax</code>      | Largest step size                                                                                                     |
| <code>scale_tol</code> | Parameter that relates the tolerance <code>tol</code> to the initial step size <code>delta</code> , usually set to 20 |

The defaults for these parameters are set in the training function that calls them. See `traincgf`, `traincgb`, `traincgp`, `trainbfg`, and `trainoss`.

Dimensions for these variables are

|                 |                           |                                                        |
|-----------------|---------------------------|--------------------------------------------------------|
| <code>Pd</code> | No-by-Ni-by-TS cell array | Each element $P\{i,j,ts\}$ is a $D_{ij}$ -by-Q matrix. |
| <code>Tl</code> | Nl-by-TS cell array       | Each element $P\{i,ts\}$ is a $V_i$ -by-Q matrix.      |
| <code>Ai</code> | Nl-by-LD cell array       | Each element $A_i\{i,k\}$ is an $S_i$ -by-Q matrix.    |

where

|                  |   |                                                        |
|------------------|---|--------------------------------------------------------|
| <code>Ni</code>  | = | <code>net.numInputs</code>                             |
| <code>Nl</code>  | = | <code>net.numLayers</code>                             |
| <code>Ld</code>  | = | <code>net.numLayerDelays</code>                        |
| <code>Ri</code>  | = | <code>net.inputs{i}.size</code>                        |
| <code>Si</code>  | = | <code>net.layers{i}.size</code>                        |
| <code>Vi</code>  | = | <code>net.targets{i}.size</code>                       |
| <code>Dij</code> | = | <code>Ri * length(net.inputWeights{i,j}.delays)</code> |

## Examples

Here is a problem consisting of inputs `p` and targets `t` to be solved with a network.

```
p = [0 1 2 3 4 5];
t = [0 0 0 1 1 1];
```

A two-layer feed-forward network is created. The network's input ranges from [0 to 10]. The first layer has two `tansig` neurons,

and the second layer has one `logsig` neuron. The `traincgf` network training function and the `srchhyb` search function are to be used.

## Create and Test a Network

```
net = newff([0 5],[2 1],{'tansig','logsig'},'traincgf');
a = sim(net,p)
```

## Train and Retest the Network

```
net.trainParam.searchFcn = 'srchhyb';
net.trainParam.epochs = 50;
net.trainParam.show = 10;
net.trainParam.goal = 0.1;
net = train(net,p,t);
a = sim(net,p)
```

## Network Use

You can create a standard network that uses `srchhyb` with `newff`, `newcf`, or `newelm`.

To prepare a custom network to be trained with `traincgf`, using the line search function `srchhyb`,

- 1 Set `net.trainFcn` to `'traincgf'`. This sets `net.trainParam` to `traincgf`'s default parameters.
- 2 Set `net.trainParam.searchFcn` to `'srchhyb'`.

The `srchhyb` function can be used with any of the following training functions: `traincgf`, `traincgb`, `traincgp`, `trainbfg`, `trainoss`.

## Algorithms

`srchhyb` locates the minimum of the performance function in the search direction  $dX$ , using the hybrid bisection-cubic interpolation algorithm described on page 50 of Scales (see reference below).

## References

Scales, L.E., *Introduction to Non-Linear Optimization*, New York Springer-Verlag, 1985

**Definitions**

Like Brent's search, `srchhyb` is a hybrid algorithm. It is a combination of bisection and cubic interpolation. For the bisection algorithm, one point is located in the interval of uncertainty, and the performance and its derivative are computed. Based on this information, half of the interval of uncertainty is discarded. In the hybrid algorithm, a cubic interpolation of the function is obtained by using the value of the performance and its derivative at the two endpoints. If the minimum of the cubic interpolation falls within the known interval of uncertainty, then it is used to reduce the interval of uncertainty. Otherwise, a step of the bisection algorithm is used.

See [Scal85] for a complete description of the hybrid bisection-cubic search. This algorithm does require derivative information, so it performs more computations at each step of the algorithm than the golden section search or Brent's algorithm.

**See Also**

`srchbac` | `srchbre` | `srchcha` | `srchgol`

**Purpose** Sum squared error performance function

**Syntax**

```
perf = sse(net,t,y,ew)
[...] = sse(...,'regularization',regularization)
[...] = sse(...,'normalization',normalization)
[...] = sse(...,'squaredWeighting',squaredWeighting)
[...] = sse(...,FP)
```

**Description** `sse` is a network performance function. It measures performance according to the sum of squared errors.

`perf = sse(net,t,y,ew)` takes these input arguments and optional function parameters,

|                  |                                        |
|------------------|----------------------------------------|
| <code>net</code> | Neural network                         |
| <code>t</code>   | Matrix or cell array of target vectors |
| <code>y</code>   | Matrix or cell array of output vectors |
| <code>ew</code>  | Error weights (default = {1})          |

and returns the sum squared error.

This function has three optional function parameters which can be defined with parameter name/pair arguments, or as a structure `FP` argument with fields having the parameter name and assigned the parameter values.

```
[...] = sse(...,'regularization',regularization)
[...] = sse(...,'normalization',normalization)
[...] = sse(...,'squaredWeighting',squaredWeighting)
[...] = sse(...,FP)
```

- `regularization` — can be set to any value between the default of 0 and 1. The greater the regularization value, the more squared weights and biases are taken into account in the performance calculation.

- `normalization` — can be set to the default `'absolute'`, or `'normalized'` (which normalizes errors to the `[+2 -2]` range consistent with normalized output and target ranges of `[-1 1]`) or `'percent'` (which normalizes errors to the range `[-1 +1]`).
- `squaredWeighting` — can be set to the default `true`, for applying error weights to squared errors; or `false` for applying error weights to the absolute errors before squaring.

## Examples

Here a network is trained to fit a simple data set and its performance calculated

```
[x,t] = simplefit_dataset;
net = fitnet(10);
net.performFcn = 'sse';
net = train(net,x,t)
y = net(x)
e = t-y
perf = sse(net,t,y)
```

## Network Use

To prepare a custom network to be trained with `sse`, set `net.performFcn` to `'sse'`. This automatically sets `net.performParam` to the default function parameters.

Then calling `train`, `adapt` or `perform` will result in `sse` being used to calculate performance.

# staticderiv

---

**Purpose** Static derivative function

**Syntax** `staticderiv('dperf_dwb',net,X,T,Xi,Ai,EW)`  
`staticderiv('de_dwb',net,X,T,Xi,Ai,EW)`

**Description** This function calculates derivatives using the chain rule from the networks performance or outputs back to its inputs. For time series data and dynamic networks this function ignores the delay connections resulting in a approximation (which may be good or not) of the actual derivative. This function is used by Elman networks (`elmannet`) which is a dynamic network trained by the static derivative approximation when full derivative calculations are not available. As full derivatives are calculated by all the other derivative functions, this function is not recommended for dynamic networks except for research into training algorithms.

`staticderiv('dperf_dwb',net,X,T,Xi,Ai,EW)` takes these arguments,

|                  |                                                                                        |
|------------------|----------------------------------------------------------------------------------------|
| <code>net</code> | Neural network                                                                         |
| <code>X</code>   | Inputs, an $R \times Q$ matrix (or $N \times TS$ cell array of $R \times Q$ matrices)  |
| <code>T</code>   | Targets, an $S \times Q$ matrix (or $M \times TS$ cell array of $S \times Q$ matrices) |
| <code>Xi</code>  | Initial input delay states (optional)                                                  |
| <code>Ai</code>  | Initial layer delay states (optional)                                                  |
| <code>EW</code>  | Error weights (optional)                                                               |

and returns the gradient of performance with respect to the network's weights and biases, where  $R$  and  $S$  are the number of input and output elements and  $Q$  is the number of samples (and  $N$  and  $M$  are the number of input and output signals,  $R_i$  and  $S_i$  are the number of each input and outputs elements, and  $TS$  is the number of timesteps).



---

`staticderiv('de_dwb',net,X,T,Xi,Ai,EW)` returns the Jacobian of errors with respect to the network's weights and biases.

## Examples

Here a feedforward network is trained and both the gradient and Jacobian are calculated.

```
[x,t] = simplefit_dataset;
net = feedforwardnet(20);
net = train(net,x,t);
y = net(x);
perf = perform(net,t,y);
gwb = staticderiv('dperf_dwb',net,x,t)
jwb = staticderiv('de_dwb',net,x,t)
```

## See Also

[bttderiv](#) | [defaultderiv](#) | [fpderiv](#) | [num2deriv](#)

# sumabs

---

**Purpose** Sum of absolute elements of matrix or matrices

**Syntax** `[s,n] = sumabs(x)`

**Description** `[s,n] = sumabs(x)` takes a matrix or cell array of matrices and returns,

s Sum of all absolute finite values

n Number of finite values

If `x` contains no finite values, the sum returned is 0.

## Examples

```
m = sumabs([1 2;3 4])
```

```
[m,n] = sumabs({[1 2; NaN 4], [4 5; 2 3]})
```

## See Also

`meanabs` | `meansqr` | `sumsqr`

**Purpose** Sum of squared elements of matrix or matrices

**Syntax** `[s,n] = sumsqr(x)`

**Description** `[s,n] = sumsqr(x)` takes a matrix or cell array of matrices and returns,

s Sum of all squared finite values

n Number of finite values

If `x` contains no finite values, the sum returned is 0.

**Examples**

```
m = sumsqr([1 2;3 4])
[m,n] = sumsqr({[1 2; NaN 4], [4 5; 2 3]})
```


**See Also** `meanabs` | `meansqr` | `sumabs`

# tansig

## Purpose

Hyperbolic tangent sigmoid transfer function

## Graph and Symbol



Tan-Sigmoid Transfer Function

## Syntax

$A = \text{tansig}(N, FP)$

## Description

tansig is a neural transfer function. Transfer functions calculate a layer's output from its net input.

$A = \text{tansig}(N, FP)$  takes  $N$  and optional function parameters,

$N$                       S-by-Q matrix of net input (column) vectors

$FP$                      Struct of function parameters (ignored)

and returns  $A$ , the S-by-Q matrix of  $N$ 's elements squashed into  $[-1 \ 1]$ .

## Examples

Here is the code to create a plot of the tansig transfer function.

```
n = -5:0.1:5;
a = tansig(n);
plot(n,a)
```

Assign this transfer function to layer  $i$  of a network.

```
net.layers{i}.transferFcn = 'tansig';
```

## Algorithms

$a = \text{tansig}(n) = 2 / (1 + \exp(-2 * n)) - 1$

This is mathematically equivalent to `tanh(N)`. It differs in that it runs faster than the MATLAB implementation of `tanh`, but the results can have very small numerical differences. This function is a good tradeoff for neural networks, where speed is important and the exact shape of the transfer function is not.

**References**

Vogl, T.P., J.K. Mangis, A.K. Rigler, W.T. Zink, and D.L. Alkon, "Accelerating the convergence of the backpropagation method," *Biological Cybernetics*, Vol. 59, 1988, pp. 257–263

**See Also**

`sim` | `logsig`

# tapdelay

---

**Purpose** Shift neural network time series data for tap delay

**Syntax** `tapdelay(x,i,ts,delays)`

**Description** `tapdelay(x,i,ts,delays)` takes these arguments,

|                     |                                                  |
|---------------------|--------------------------------------------------|
| <code>x</code>      | Neural network time series data                  |
| <code>i</code>      | Signal index                                     |
| <code>ts</code>     | Timestep index                                   |
| <code>delays</code> | Row vector of increasing zero or positive delays |

and returns the tap delay values of signal `i` at timestep `ts` given the specified tap delays.

**Examples** Here a random signal `x` consisting of eight timesteps is defined, and a tap delay with delays of `[0 1 4]` is simulated at timestep 6.

```
x = num2cell(rand(1,8));
y = tapdelay(x,1,6,[0 1 4])
```

**See Also** `nndata` | `extendts` | `preparets`

**Purpose** Time delay neural network

**Syntax** `timedelaynet(inputDelays,hiddenSizes,trainFcn)`

**Description** Time delay networks are similar to feedforward networks, except that the input weight has a tap delay line associated with it. This allows the network to have a finite dynamic response to time series input data. This network is also similar to the distributed delay neural network (`distdelaynet`), which has delays on the layer weights in addition to the input weight.

`timedelaynet(inputDelays,hiddenSizes,trainFcn)` takes these arguments,

|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| <code>inputDelays</code> | Row vector of increasing 0 or positive delays (default = 1:2) |
| <code>hiddenSizes</code> | Row vector of one or more hidden layer sizes (default = 10)   |
| <code>trainFcn</code>    | Training function (default = 'trainlm')                       |

and returns a time delay neural network.

**Examples** Here a time delay neural network is used to solve a simple time series problem.

```
[X,T] = simpleseries_dataset;
net = timedelaynet(1:2,10)
[Xs,Xi,Ai,Ts] = preparets(net,X,T)
net = train(net,Xs,Ts,Xi,Ai);
view(net)
Y = net(Xs,Xi,Ai);
perf = perform(net,Ts,Y)
```

**See Also** `preparets` | `removedelay` | `distdelaynet` | `narnet` | `narxnet`

# tonndata

---

**Purpose** Convert data to standard neural network cell array form

**Syntax** `[y,wasMatrix] = tonndata(x,columnSamples,cellTime)`

**Description** `[y,wasMatrix] = tonndata(x,columnSamples,cellTime)` takes these arguments,

|                            |                                                                                 |
|----------------------------|---------------------------------------------------------------------------------|
| <code>x</code>             | Matrix or cell array of matrices                                                |
| <code>columnSamples</code> | True if original samples are oriented as columns, false if rows                 |
| <code>cellTime</code>      | True if original samples are columns of cell, false if they are store in matrix |

and returns

|                        |                                                                        |
|------------------------|------------------------------------------------------------------------|
| <code>y</code>         | Original data transformed into standard neural network cell array form |
| <code>wasMatrix</code> | True if original data was a matrix (as apposed to cell array)          |

If `columnSamples` is false, then matrix `x` or matrices in cell array `x` will be transposed, so row samples will now be stored as column vectors.

If `cellTime` is false, then matrix samples will be separated into columns of a cell array so time originally represented as vectors in a matrix will now be represented as columns of a cell array.

The returned value `wasMatrix` can be used by `fromnndata` to reverse the transformation.

**Examples** Here data consisting of six timesteps of 5-element vectors is originally represented as a matrix with six columns is converted to standard neural network representation and back.



```
x = rand(5,6)
[y,wasMatrix] = tonndata(x,true,false)
x2 = fromndata(y,wasMatrix,columnSamples,cellTime)
```

**See Also**

[ndata](#) | [fromndata](#) | [ndata2sim](#) | [sim2ndata](#)

# train

---

**Purpose** Train neural network

**Syntax**

```
[net,tr] = train(net,X,T,Xi,Ai)
[net,...] = train(...,'useParallel',...)
[net,...] = train(...,'useGPU',...)
[net,...] = train(...,'showResources',...)
[net,...] = train(Xcomposite,Tcomposite,...)
[net,...] = train(Xgpu,Tgpu,...)
```

**To Get Help** Type `help network/train`.

**Description** `train` trains a network `net` according to `net.trainFcn` and `net.trainParam`.

`[net,tr] = train(net,X,T,Xi,Ai)` takes

|                  |                                                  |
|------------------|--------------------------------------------------|
| <code>net</code> | Network                                          |
| <code>X</code>   | Network inputs                                   |
| <code>T</code>   | Network targets (default = zeros)                |
| <code>Xi</code>  | Initial input delay conditions (default = zeros) |
| <code>Ai</code>  | Initial layer delay conditions (default = zeros) |

and returns

|                  |                                  |
|------------------|----------------------------------|
| <code>net</code> | New network                      |
| <code>tr</code>  | Training record (epoch and perf) |

Note that `T` is optional and need only be used for networks that require targets. `Xi` is also optional and need only be used for networks that have input or layer delays.

`train`'s signal arguments can have two formats: cell array or matrix.

The cell array format is easiest to describe. It is most convenient for networks with multiple inputs and outputs, and allows sequences of inputs to be presented.

|    |                     |                                                    |
|----|---------------------|----------------------------------------------------|
| X  | Ni-by-TS cell array | Each element $X\{i, j, ts\}$ is an Ni-by-Q matrix. |
| T  | N1-by-TS cell array | Each element $T\{i, ts\}$ is a Ui-by-Q matrix.     |
| Xi | Ni-by-ID cell array | Each element $Xi\{i, k\}$ is an Ri-by-Q matrix.    |
| Ai | N1-by-LD cell array | Each element $Ai\{i, k\}$ is an Si-by-Q matrix.    |

where

|    |   |                      |
|----|---|----------------------|
| Ni | = | net.numInputs        |
| N1 | = | net.numLayers        |
| ID | = | net.numInputDelays   |
| LD | = | net.numLayerDelays   |
| TS | = | Number of time steps |
| Q  | = | Batch size           |
| Ri | = | net.inputs{i}.size   |
| Si | = | net.layers{i}.size   |

The columns of  $Xi$  and  $Ai$  are ordered from the oldest delay condition to the most recent:

|              |   |                                      |
|--------------|---|--------------------------------------|
| $Xi\{i, k\}$ | = | Input i at time $ts = k - ID$        |
| $Ai\{i, k\}$ | = | Layer output i at time $ts = k - LD$ |

The matrix format can be used if only one time step is to be simulated ( $TS = 1$ ). It is convenient for networks with only one input and output, but can be used with networks that have more.

Each matrix argument is found by storing the elements of the corresponding cell array argument in a single matrix:

|    |                              |
|----|------------------------------|
| X  | (sum of Ri)-by-Q matrix      |
| T  | (sum of Ui)-by-Q matrix      |
| Xi | (sum of Ri)-by-(ID*Q) matrix |
| Ai | (sum of Si)-by-(LD*Q) matrix |

`[net,...] = train(...,'useParallel',...),`  
`[net,...] = train(...,'useGPU',...),` or `[net,...] =`  
`train(...,'showResources',...)` accepts optional name/value pair arguments to control how calculations are performed. Two of these options allow training to happen faster or on larger datasets using parallel workers or GPU devices if Parallel Computing Toolbox is available. These are the optional name/value pairs:

- 'useParallel', 'no' Calculations occur on normal MATLAB thread. This is the default 'useParallel' setting.
- 'useParallel', 'yes' Calculations occur on parallel workers if a MATLAB pool is open. Otherwise calculations occur on the normal MATLAB thread.
- 'useGPU', 'no' Calculations occur on the CPU. This is the default 'useGPU' setting.

- 'useGPU', 'yes' Calculations occur on the current gpuDevice if it is a supported GPU (See Parallel Computing Toolbox for GPU requirements.) If the current gpuDevice is not supported, calculations remain on the CPU. If 'useParallel' is also 'yes' and a MATLAB pool is open, then each worker with a unique GPU uses that GPU, other workers run calculations on their respective CPU cores.
- 'useGPU', 'only' If no MATLAB pool is open, then this setting is the same as 'yes'. If a MATLAB pool is open then only workers with unique GPUs are used. However, if a MATLAB pool is open, but no supported GPUs are available, then calculations revert to performing on all worker CPUs.
- 'showResources', 'no' Do not display computing resources used at the command line. This is the default setting.
- 'showResources', 'yes' Show at the command line a summary of the computing resources actually used. The actual resources may differ from the requested resources, if parallel or GPU computing is requested but a MATLAB pool is not open or a supported GPU is not available. When parallel workers are used, each worker's computation mode is described, including workers in the pool that are not used.
- 'reduction', N For most neural networks, the default CPU training computation mode is a compiled MEX algorithm. However, for large networks the calculations might occur with a MATLAB calculation mode. This can be confirmed using 'showResources'. If MATLAB is being used and memory is an issue, setting the reduction option to a value N greater than 1, reduces much of the temporary storage required to train by a factor of N, in exchange for longer training times.

`[net,...] = train(Xcomposite,Tcomposite,...)` takes Composite data and returns Composite results. If Composite data is used, then 'useParallel' is automatically set to 'yes'.

`[net,...] = train(Xgpu,Tgpu,...)` takes gpuArray data and returns gpuArray results. If gpuArray data is used, then 'useGPU' is automatically set to 'yes'.

## Examples

### Train and Plot Networks

Here input `x` and targets `t` define a simple function that you can plot:

```
x = [0 1 2 3 4 5 6 7 8];
t = [0 0.84 0.91 0.14 -0.77 -0.96 -0.28 0.66 0.99];
plot(x,t,'o')
```

Here `feedforwardnet` creates a two-layer feed-forward network. The network has one hidden layer with ten neurons.

```
net = feedforwardnet(10);
net = configure(net,x,t);
y1 = net(x)
plot(x,t,'o',x,y1,'x')
```

The network is trained and then resimulated.

```
net = train(net,x,t);
y2 = net(x)
plot(x,t,'o',x,y1,'x',x,y2,'*')
```

### Train a NARX Time Series Network

This example trains an open-loop nonlinear-autoregressive network with external input, to model a levitated magnet system defined by a control current `x` and the magnet's vertical position response `t`, then simulates the network. The function `preparets` prepares the data before training and simulation. It creates the open-loop network's combined inputs `x0`, which contains both the external input `x` and previous values of position `t`. It also prepares the delay states `xi`.

```
[x,t] = maglev_dataset;
net = narxnet(10);
[xo,xi,~,to] = preparets(net,x,{},t);
net = train(net,xo,to,xi);
y = net(xo,xi)
```

This same system can also be simulated in closed-loop form.

```
netc = closeloop(net);
view(netc)
[xc,xi,ai,tc] = preparets(netc,x,{},t);
yc = netc(xc,xi,ai);
```

### Train a Network in Parallel on a MATLAB Pool

Parallel Computing Toolbox allows Neural Network Toolbox to simulate and train networks faster and on larger datasets than can fit on one PC. Here training and simulation happens across parallel MATLAB workers.

```
matlabpool open
[X,T] = vinyl_dataset;
net = feedforwardnet(10);
net = train(net,X,T,'useParallel','yes','showResources','yes');
Y = net(X);
```

### Train a Network on GPUs

Use Composite values to distribute the data manually, and get back the results as a Composite value. If the data is loaded as it is distributed then while each piece of the dataset must fit in RAM, the entire dataset is limited only by the total RAM of all the workers.

```
Xc = Composite;
Tc = Composite;
for i=1:numel(Xc)
 Xc{i} = X+rand(size(X))*0.1; % (Use real data instead
 Tc{i} = T+rand(size(T))*0.1; % of random data)
end
net = train(net,Xc,Tc);
```

```
Yc = net(Xc);
```

Networks can be trained using the current GPU device, if it is supported by Parallel Computing Toolbox.

```
net = train(net,X,T,'useGPU','yes');
y = net(X);
```

To put the data on a GPU manually:

```
Xgpu = gpuArray(X);
Tgpu = gpuArray(T);
net = train(net,Xgpu,Tgpu);
Ygpu = net(Xgpu);
Y = gather(Ygpu);
```

To run in parallel, with workers associated with unique GPUs taking advantage of that hardware, while the rest of the workers use CPUs:

```
net = train(net,X,T,'useParallel','yes','useGPU','yes');
y = net(X);
```

Using only workers with unique GPUs might result in higher speed, as CPU workers might not keep up.

```
net = train(net,X,T,'useParallel','yes','useGPU','only');
Y = net(X);
```

## Algorithms

`train` calls the function indicated by `net.trainFcn`, using the training parameter values indicated by `net.trainParam`.

Typically one epoch of training is defined as a single presentation of all input vectors to the network. The network is then updated according to the results of all those presentations.

Training occurs until a maximum number of epochs occurs, the performance goal is met, or any other stopping condition of the function `net.trainFcn` occurs.



Some training functions depart from this norm by presenting only one input vector (or sequence) each epoch. An input vector (or sequence) is chosen randomly for each epoch from concurrent input vectors (or sequences). `competlayer` returns networks that use `trainru`, a training function that does this.

**See Also**

`init` | `revert` | `sim` | `adapt`

# trainb

---

**Purpose** Batch training with weight and bias learning rules

**Syntax**

```
net.trainFcn = 'trainb'
[net,tr] = train(net,...)
```

**Description** `trainb` is not called directly. Instead it is called by `train` for networks whose `net.trainFcn` property is set to 'trainb', thus:

```
net.trainFcn = 'trainb'
[net,tr] = train(net,...)
```

`trainb` trains a network with weight and bias learning rules with batch updates. The weights and biases are updated at the end of an entire pass through the input data.

Training occurs according to `trainb`'s training parameters, shown here with their default values:

|                                             |       |                                               |
|---------------------------------------------|-------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100   | Maximum number of epochs to train             |
| <code>net.trainParam.goal</code>            | 0     | Performance goal                              |
| <code>net.trainParam.max_fail</code>        | 5     | Maximum validation failures                   |
| <code>net.trainParam.show</code>            | 25    | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | false | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | true  | Show training GUI                             |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds              |

**Network Use** You can create a standard network that uses `trainb` by calling `linearlayer`.

To prepare a custom network to be trained with `trainb`,

- 1 Set `net.trainFcn` to 'trainb'. This sets `net.trainParam` to `trainb`'s default parameters.

- 2 Set each `net.inputWeights{i,j}.learnFcn` to a learning function. Set each `net.layerWeights{i,j}.learnFcn` to a learning function. Set each `net.biases{i}.learnFcn` to a learning function. (Weight and bias learning parameters are automatically set to default values for the given learning function.)

To train the network,

- 1 Set `net.trainParam` properties to desired values.
- 2 Set weight and bias learning parameters to desired values.
- 3 Call `train`.

## Algorithms

Each weight and bias is updated according to its learning function after each epoch (one pass through the entire set of input vectors).

Training stops when any of these conditions is met:

- The maximum number of epochs (repetitions) is reached.
- Performance is minimized to the goal.
- The maximum amount of time is exceeded.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## See Also

`linearlayer` | `train`

# trainbfg

---

**Purpose** BFGS quasi-Newton backpropagation

**Syntax** `net.trainFcn = 'trainbfg'`  
`[net,tr] = train(net,...)`

**Description** `trainbfg` is a network training function that updates weight and bias values according to the BFGS quasi-Newton method.

`net.trainFcn = 'trainbfg'`  
`[net,tr] = train(net,...)`

Training occurs according to `trainbfg`'s training parameters, shown here with their default values:

|                                             |           |                                               |
|---------------------------------------------|-----------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100       | Maximum number of epochs to train             |
| <code>net.trainParam.showWindow</code>      | 0         | Show training window                          |
| <code>net.trainParam.show</code>            | 25        | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0         | Generate command-line output                  |
| <code>net.trainParam.goal</code>            | 0         | Performance goal                              |
| <code>net.trainParam.time</code>            | inf       | Maximum time to train in seconds              |
| <code>net.trainParam.min_grad</code>        | 1e-6      | Minimum performance gradient                  |
| <code>net.trainParam.max_fail</code>        | 5         | Maximum validation failures                   |
| <code>net.trainParam.searchFcn</code>       | 'srchcha' | Name of line search routine to use            |

Parameters related to line search methods (not all used for all methods):

|                                        |        |                                                                                                                                                                                                                            |
|----------------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>net.trainParam.scal_tol</code>   | 20     | Divide into <code>delta</code> to determine tolerance for linear search.                                                                                                                                                   |
| <code>net.trainParam.alpha</code>      | 0.001  | Scale factor that determines sufficient reduction in <code>perf</code>                                                                                                                                                     |
| <code>net.trainParam.beta</code>       | 0.1    | Scale factor that determines sufficiently large step size                                                                                                                                                                  |
| <code>net.trainParam.delta</code>      | 0.01   | Initial step size in interval location step                                                                                                                                                                                |
| <code>net.trainParam.gama</code>       | 0.1    | Parameter to avoid small reductions in performance, usually set to 0.1 (see <code>srch_cha</code> )                                                                                                                        |
| <code>net.trainParam.low_lim</code>    | 0.1    | Lower limit on change in step size                                                                                                                                                                                         |
| <code>net.trainParam.up_lim</code>     | 0.5    | Upper limit on change in step size                                                                                                                                                                                         |
| <code>net.trainParam.maxstep</code>    | 100    | Maximum step length                                                                                                                                                                                                        |
| <code>net.trainParam.minstep</code>    | 1.0e-6 | Minimum step length                                                                                                                                                                                                        |
| <code>net.trainParam.bmax</code>       | 26     | Maximum step size                                                                                                                                                                                                          |
| <code>net.trainParam.batch_frag</code> | 0      | In case of multiple batches, they are considered independent. Any nonzero value implies a fragmented batch, so the final layer's conditions of a previous trained epoch are used as initial conditions for the next epoch. |

## Network Use

You can create a standard network that uses `trainbfg` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `trainbfg`:

- 1 Set `NET.trainFcn` to `'trainbfg'`. This sets `NET.trainParam` to `trainbfg`'s default parameters.
- 2 Set `NET.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `trainbfg`.

# trainbfg

---

## Examples

Here a neural network is trained to predict median house prices.

```
[x,t] = house_dataset;
net = feedforwardnet(10,'trainbfg');
net = train(net,x,t);
y = net(x)
```

## Algorithms

trainbfg can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance perf with respect to the weight and bias variables  $X$ . Each variable is adjusted according to the following:

$$X = X + a \cdot dX;$$

where  $dX$  is the search direction. The parameter  $a$  is selected to minimize the performance along the search direction. The line search function `searchFcn` is used to locate the minimum point. The first search direction is the negative of the gradient of performance. In succeeding iterations the search direction is computed according to the following formula:

$$dX = -H \backslash gX;$$

where  $gX$  is the gradient and  $H$  is an approximate Hessian matrix. See page 119 of Gill, Murray, and Wright (*Practical Optimization*, 1981) for a more detailed discussion of the BFGS quasi-Newton method.

Training stops when any of these conditions occurs:

- The maximum number of epochs (repetitions) is reached.
- The maximum amount of time is exceeded.
- Performance is minimized to the goal.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

**References**

Gill, Murray, & Wright, *Practical Optimization*, 1981

**Definitions**

Newton's method is an alternative to the conjugate gradient methods for fast optimization. The basic step of Newton's method is

$$\mathbf{x}_{k+1} = \mathbf{x}_k - \mathbf{A}_k^{-1} \mathbf{g}_k$$

where  $\mathbf{A}_k^{-1}$  is the Hessian matrix (second derivatives) of the performance index at the current values of the weights and biases. Newton's method often converges faster than conjugate gradient methods. Unfortunately, it is complex and expensive to compute the Hessian matrix for feedforward neural networks. There is a class of algorithms that is based on Newton's method, but which does not require calculation of second derivatives. These are called quasi-Newton (or secant) methods. They update an approximate Hessian matrix at each iteration of the algorithm. The update is computed as a function of the gradient. The quasi-Newton method that has been most successful in published studies is the Broyden, Fletcher, Goldfarb, and Shanno (BFGS) update. This algorithm is implemented in the `trainbfg` routine.

The BFGS algorithm is described in [DeSc83]. This algorithm requires more computation in each iteration and more storage than the conjugate gradient methods, although it generally converges in fewer iterations. The approximate Hessian must be stored, and its dimension is  $n \times n$ , where  $n$  is equal to the number of weights and biases in the network. For very large networks it might be better to use `Rprop` or one of the conjugate gradient algorithms. For smaller networks, however, `trainbfg` can be an efficient training function.

**See Also**

`cascadeforwardnet` | `feedforwardnet` | `traingdm` | `traingda` | `traingdx` | `trainlm` | `trainrp` | `traincgf` | `traincgb` | `trainscg` | `traincgp` | `trainoss`

# trainbfgc

---

**Purpose** BFGS quasi-Newton backpropagation for use with NN model reference adaptive controller

**Syntax** `[net,TR,Y,E,Pf,Af,flag_stop] = trainbfgc(net,P,T,Pi,Ai,epochs,TS,Q)`  
`info = trainbfgc(code)`

**Description** trainbfgc is a network training function that updates weight and bias values according to the BFGS quasi-Newton method. This function is called from nnmodref, a GUI for the model reference adaptive control Simulink block.

`[net,TR,Y,E,Pf,Af,flag_stop] = trainbfgc(net,P,T,Pi,Ai,epochs,TS,Q)` takes these inputs,

|        |                                   |
|--------|-----------------------------------|
| net    | Neural network                    |
| P      | Delayed input vectors             |
| T      | Layer target vectors              |
| Pi     | Initial input delay conditions    |
| Ai     | Initial layer delay conditions    |
| epochs | Number of iterations for training |
| TS     | Time steps                        |
| Q      | Batch size                        |

and returns

|     |                                                                                                             |
|-----|-------------------------------------------------------------------------------------------------------------|
| net | Trained network                                                                                             |
| TR  | Training record of various values over each epoch:<br>TR.epoch Epoch number<br>TR.perf Training performance |



|           |          |                                            |
|-----------|----------|--------------------------------------------|
|           | TR.vperf | Validation performance                     |
|           | TR.tperf | Test performance                           |
| Y         |          | Network output for last epoch              |
| E         |          | Layer errors for last epoch                |
| Pf        |          | Final input delay conditions               |
| Af        |          | Collective layer outputs for last epoch    |
| flag_stop |          | Indicates if the user stopped the training |

Training occurs according to trainbfgc's training parameters, shown here with their default values:

|                          |           |                                               |
|--------------------------|-----------|-----------------------------------------------|
| net.trainParam.epochs    | 100       | Maximum number of epochs to train             |
| net.trainParam.show      | 25        | Epochs between displays (NaN for no displays) |
| net.trainParam.goal      | 0         | Performance goal                              |
| net.trainParam.time      | inf       | Maximum time to train in seconds              |
| net.trainParam.min_grad  | 1e-6      | Minimum performance gradient                  |
| net.trainParam.max_fail  | 5         | Maximum validation failures                   |
| net.trainParam.searchFcn | 'srchbcx' | Name of line search routine to use            |

Parameters related to line search methods (not all used for all methods):

|                         |       |                                                             |
|-------------------------|-------|-------------------------------------------------------------|
| net.trainParam.scal_tol | 20    | Divide into delta to determine tolerance for linear search. |
| net.trainParam.alpha    | 0.001 | Scale factor that determines sufficient reduction in perf   |
| net.trainParam.beta     | 0.1   | Scale factor that determines sufficiently large step size   |
| net.trainParam.delta    | 0.01  | Initial step size in interval location step                 |

# trainbfgc

---

|                                     |        |                                                                                                     |
|-------------------------------------|--------|-----------------------------------------------------------------------------------------------------|
| <code>net.trainParam.gama</code>    | 0.1    | Parameter to avoid small reductions in performance, usually set to 0.1 (see <code>srch_cha</code> ) |
| <code>net.trainParam.low_lim</code> | 0.1    | Lower limit on change in step size                                                                  |
| <code>net.trainParam.up_lim</code>  | 0.5    | Upper limit on change in step size                                                                  |
| <code>net.trainParam.maxstep</code> | 100    | Maximum step length                                                                                 |
| <code>net.trainParam.minstep</code> | 1.0e-6 | Minimum step length                                                                                 |
| <code>net.trainParam.bmax</code>    | 26     | Maximum step size                                                                                   |

`info = trainbfgc(code)` returns useful information for each code string:

'pnames'        Names of training parameters  
'pdefaults'    Default training parameters

## Algorithms

`trainbfgc` can train any network as long as its weight, net input, and transfer functions have derivative functions. Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables `X`. Each variable is adjusted according to the following:

$$X = X + a*dX;$$

where `dX` is the search direction. The parameter `a` is selected to minimize the performance along the search direction. The line search function `searchFcn` is used to locate the minimum point. The first search direction is the negative of the gradient of performance. In succeeding iterations the search direction is computed according to the following formula:

$$dX = -H\backslash gX;$$

where  $g_X$  is the gradient and  $H$  is an approximate Hessian matrix. See page 119 of Gill, Murray, and Wright (*Practical Optimization*, 1981) for a more detailed discussion of the BFGS quasi-Newton method.

Training stops when any of these conditions occurs:

- The maximum number of `epochs` (repetitions) is reached.
- The maximum amount of `time` is exceeded.
- Performance is minimized to the `goal`.
- The performance gradient falls below `min_grad`.
- Precision problems have occurred in the matrix inversion.

**References**

Gill, Murray, and Wright, *Practical Optimization*, 1981

# trainbr

---

**Purpose** Bayesian regulation backpropagation

**Syntax** `net.trainFcn = 'trainbr'`  
`[net,tr] = train(net,...)`

**Description** `trainbr` is a network training function that updates the weight and bias values according to Levenberg-Marquardt optimization. It minimizes a combination of squared errors and weights, and then determines the correct combination so as to produce a network that generalizes well. The process is called Bayesian regularization.

```
net.trainFcn = 'trainbr'

[net,tr] = train(net,...)
```

Training occurs according to `trainbr`'s training parameters, shown here with their default values:

|                                             |       |                                               |
|---------------------------------------------|-------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100   | Maximum number of epochs to train             |
| <code>net.trainParam.goal</code>            | 0     | Performance goal                              |
| <code>net.trainParam.mu</code>              | 0.005 | Marquardt adjustment parameter                |
| <code>net.trainParam.mu_dec</code>          | 0.1   | Decrease factor for mu                        |
| <code>net.trainParam.mu_inc</code>          | 10    | Increase factor for mu                        |
| <code>net.trainParam.mu_max</code>          | 1e10  | Maximum value for mu                          |
| <code>net.trainParam.max_fail</code>        | 5     | Maximum validation failures                   |
| <code>net.trainParam.mem_reduc</code>       | 1     | Factor to use for memory/speed tradeoff       |
| <code>net.trainParam.min_grad</code>        | 1e-10 | Minimum performance gradient                  |
| <code>net.trainParam.show</code>            | 25    | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0     | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1     | Show training GUI                             |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds              |

## Network Use

You can create a standard network that uses `trainbr` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `trainbr`,

- 1 Set `NET.trainFcn` to `'trainbr'`. This sets `NET.trainParam` to `trainbr`'s default parameters.
- 2 Set `NET.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `trainbr`. See `feedforwardnet` and `cascadeforwardnet` for examples.

## Examples

Here is a problem consisting of inputs `p` and targets `t` to be solved with a network. It involves fitting a noisy sine wave.

```
p = [-1:.05:1];
t = sin(2*pi*p)+0.1*randn(size(p));
```

A feed-forward network is created with a hidden layer of 2 neurons.

```
net = feedforwardnet(2,'trainbr');
```

Here the network is trained and tested.

```
net = train(net,p,t);
a = net(p)
```

## Algorithms

`trainbr` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Bayesian regularization minimizes a linear combination of squared errors and weights. It also modifies the linear combination so that at the end of training the resulting network has good generalization qualities. See MacKay (*Neural Computation*, Vol. 4, No. 3, 1992, pp. 415 to 447) and Foresee and Hagan (*Proceedings of the International*

*Joint Conference on Neural Networks*, June, 1997) for more detailed discussions of Bayesian regularization.

This Bayesian regularization takes place within the Levenberg-Marquardt algorithm. Backpropagation is used to calculate the Jacobian  $jX$  of performance `perf` with respect to the weight and bias variables  $X$ . Each variable is adjusted according to Levenberg-Marquardt,

```
jj = jX * jX
je = jX * E
dX = -(jj+I*mu) \ je
```

where  $E$  is all errors and  $I$  is the identity matrix.

The adaptive value  $\mu$  is increased by `mu_inc` until the change shown above results in a reduced performance value. The change is then made to the network, and  $\mu$  is decreased by `mu_dec`.

The parameter `mem_reduc` indicates how to use memory and speed to calculate the Jacobian  $jX$ . If `mem_reduc` is 1, then `trainlm` runs the fastest, but can require a lot of memory. Increasing `mem_reduc` to 2 cuts some of the memory required by a factor of two, but slows `trainlm` somewhat. Higher values continue to decrease the amount of memory needed and increase the training times.

Training stops when any of these conditions occurs:

- The maximum number of `epochs` (repetitions) is reached.
- The maximum amount of `time` is exceeded.
- Performance is minimized to the `goal`.
- The performance gradient falls below `min_grad`.
- $\mu$  exceeds `mu_max`.

## Limitations

This function uses the Jacobian for calculations, which assumes that performance is a mean or sum of squared errors. Therefore networks

trained with this function must use either the `mse` or `sse` performance function.

**References**

MacKay, *Neural Computation*, Vol. 4, No. 3, 1992, pp. 415–447

Foresee and Hagan, *Proceedings of the International Joint Conference on Neural Networks*, June, 1997

**See Also**

`cascadeforwardnet` | `feedforwardnet` | `traingdm` | `traingda` | `traingdx` | `trainlm` | `trainrp` | `traingcf` | `traingcb` | `trainscg` | `traingcp` | `trainbfg`

# trainbu

---

**Purpose** Batch unsupervised weight/bias training

**Syntax** `net.trainFcn = 'trainbu'`  
`[net,tr] = train(net,...)`

**Description** `trainbu` trains a network with weight and bias learning rules with batch updates. Weights and biases updates occur at the end of an entire pass through the input data.

`trainbu` is not called directly. Instead the `train` function calls it for networks whose `NET.trainFcn` property is set to `'trainbu'`, thus:

```
net.trainFcn = 'trainbu'
[net,tr] = train(net,...)
```

Training occurs according to `trainbu` training parameters, shown here with the following default values:

|                                             |       |                                               |
|---------------------------------------------|-------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100   | Maximum number of epochs to train             |
| <code>net.trainParam.show</code>            | 25    | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | false | Generate command-line output                  |
| <code>net.trainParam.showGUI</code>         | true  | Show training GUI                             |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds              |

Validation and test vectors have no impact on training for this function, but act as independent measures of network generalization.

## Network Use

You can create a standard network that uses `trainbu` by calling `selforgmap`. To prepare a custom network to be trained with `trainbu`:

- 1 Set `NET.trainFcn` to `'trainbu'`. (This option sets `NET.trainParam` to `trainbu` default parameters.)
- 2 Set each `NET.inputWeights{i,j}.learnFcn` to a learning function.



- 3 Set each `NET.layerWeights{i, j}.learnFcn` to a learning function.
- 4 Set each `NET.biases{i}.learnFcn` to a learning function. (Weight and bias learning parameters are automatically set to default values for the given learning function.)

To train the network:

- 1 Set `NET.trainParam` properties to desired values.
- 2 Set weight and bias learning parameters to desired values.
- 3 Call `train`.

See `selforgmap` for training examples.

## Algorithms

Each weight and bias updates according to its learning function after each epoch (one pass through the entire set of input vectors).

Training stops when any of these conditions is met:

- The maximum number of epochs (repetitions) is reached.
- Performance is minimized to the goal.
- The maximum amount of time is exceeded.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## See Also

`train` | `trainb`

# trainc

---

**Purpose** Cyclical order weight/bias training

**Syntax** `net.trainFcn = 'trainc'`  
`[net,tr] = train(net,...)`

**Description** `trainc` is not called directly. Instead it is called by `train` for networks whose `net.trainFcn` property is set to `'trainc'`, thus:

```
net.trainFcn = 'trainc'
[net,tr] = train(net,...)
```

`trainc` trains a network with weight and bias learning rules with incremental updates after each presentation of an input. Inputs are presented in cyclic order.

Training occurs according to `trainc`'s training parameters, shown here with their default values:

|                                             |       |                                               |
|---------------------------------------------|-------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100   | Maximum number of epochs to train             |
| <code>net.trainParam.goal</code>            | 0     | Performance goal                              |
| <code>net.trainParam.max_fail</code>        | 5     | Maximum validation failures                   |
| <code>net.trainParam.show</code>            | 25    | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | false | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | true  | Show training GUI                             |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds              |

**Network Use** You can create a standard network that uses `trainc` by calling `competlayer`. To prepare a custom network to be trained with `trainc`,

- 1 Set `net.trainFcn` to `'trainc'`. This sets `net.trainParam` to `trainc`'s default parameters.

- 2 Set each `net.inputWeights{i,j}.learnFcn` to a learning function. Set each `net.layerWeights{i,j}.learnFcn` to a learning function. Set each `net.biases{i}.learnFcn` to a learning function. (Weight and bias learning parameters are automatically set to default values for the given learning function.)

To train the network,

- 1 Set `net.trainParam` properties to desired values.
- 2 Set weight and bias learning parameters to desired values.
- 3 Call `train`.

See `newp` for training examples.

## Algorithms

For each epoch, each vector (or sequence) is presented in order to the network, with the weight and bias values updated accordingly after each individual presentation.

Training stops when any of these conditions is met:

- The maximum number of epochs (repetitions) is reached.
- Performance is minimized to the goal.
- The maximum amount of time is exceeded.

## See Also

`competlayer` | `train`

# traincgb

---

**Purpose** Conjugate gradient backpropagation with Powell-Beale restarts

**Syntax** `net.trainFcn = 'traincgb'`  
`[net,tr] = train(net,...)`

**Description** `traincgb` is a network training function that updates weight and bias values according to the conjugate gradient backpropagation with Powell-Beale restarts.

`net.trainFcn = 'traincgb'`  
`[net,tr] = train(net,...)`

Training occurs according to `traincgb`'s training parameters, shown here with their default values:

|                                             |           |                                               |
|---------------------------------------------|-----------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100       | Maximum number of epochs to train             |
| <code>net.trainParam.show</code>            | 25        | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0         | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1         | Show training GUI                             |
| <code>net.trainParam.goal</code>            | 0         | Performance goal                              |
| <code>net.trainParam.time</code>            | inf       | Maximum time to train in seconds              |
| <code>net.trainParam.min_grad</code>        | 1e-6      | Minimum performance gradient                  |
| <code>net.trainParam.max_fail</code>        | 5         | Maximum validation failures                   |
| <code>net.trainParam.searchFcn</code>       | 'srchcha' | Name of line search routine to use            |

Parameters related to line search methods (not all used for all methods):

|                                      |       |                                                             |
|--------------------------------------|-------|-------------------------------------------------------------|
| <code>net.trainParam.scal_tol</code> | 20    | Divide into delta to determine tolerance for linear search. |
| <code>net.trainParam.alpha</code>    | 0.001 | Scale factor that determines sufficient reduction in perf   |

|                                     |        |                                                                                                     |
|-------------------------------------|--------|-----------------------------------------------------------------------------------------------------|
| <code>net.trainParam.beta</code>    | 0.1    | Scale factor that determines sufficiently large step size                                           |
| <code>net.trainParam.delta</code>   | 0.01   | Initial step size in interval location step                                                         |
| <code>net.trainParam.gama</code>    | 0.1    | Parameter to avoid small reductions in performance, usually set to 0.1 (see <code>srch_cha</code> ) |
| <code>net.trainParam.low_lim</code> | 0.1    | Lower limit on change in step size                                                                  |
| <code>net.trainParam.up_lim</code>  | 0.5    | Upper limit on change in step size                                                                  |
| <code>net.trainParam.maxstep</code> | 100    | Maximum step length                                                                                 |
| <code>net.trainParam.minstep</code> | 1.0e-6 | Minimum step length                                                                                 |
| <code>net.trainParam.bmax</code>    | 26     | Maximum step size                                                                                   |

## Network Use

You can create a standard network that uses `traincgb` with `feedforwardnet` or `cascadeforwardnet`.

To prepare a custom network to be trained with `traincgb`,

- 1 Set `net.trainFcn` to `'traincgb'`. This sets `net.trainParam` to `traincgb`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `traincgb`.

## Examples

Here a neural network is trained to predict median house prices.

```
[x,t] = house_dataset;
net = feedforwardnet(10,'traincgb');
net = train(net,x,t);
y = net(x)
```

## Algorithms

`traincgb` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables `X`. Each variable is adjusted according to the following:

$$X = X + a*dX;$$

where `dX` is the search direction. The parameter `a` is selected to minimize the performance along the search direction. The line search function `searchFcn` is used to locate the minimum point. The first search direction is the negative of the gradient of performance. In succeeding iterations the search direction is computed from the new gradient and the previous search direction according to the formula

$$dX = -gX + dX\_old*Z;$$

where `gX` is the gradient. The parameter `Z` can be computed in several different ways. The Powell-Beale variation of conjugate gradient is distinguished by two features. First, the algorithm uses a test to determine when to reset the search direction to the negative of the gradient. Second, the search direction is computed from the negative gradient, the previous search direction, and the last search direction before the previous reset. See Powell, *Mathematical Programming*, Vol. 12, 1977, pp. 241 to 254, for a more detailed discussion of the algorithm.

Training stops when any of these conditions occurs:

- The maximum number of `epochs` (repetitions) is reached.
- The maximum amount of `time` is exceeded.
- Performance is minimized to the `goal`.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## References

Powell, M.J.D., "Restart procedures for the conjugate gradient method," *Mathematical Programming*, Vol. 12, 1977, pp. 241–254

## Definitions

For all conjugate gradient algorithms, the search direction is periodically reset to the negative of the gradient. The standard reset point occurs when the number of iterations is equal to the number of network parameters (weights and biases), but there are other reset methods that can improve the efficiency of training. One such reset method was proposed by Powell [Powe77], based on an earlier version proposed by Beale [Beal72]. This technique restarts if there is very little orthogonality left between the current gradient and the previous gradient. This is tested with the following inequality:

$$|\mathbf{g}_{k-1}^T \mathbf{g}_k| \geq 0.2 \|\mathbf{g}_k\|^2$$

If this condition is satisfied, the search direction is reset to the negative of the gradient.

The `traincgb` routine has somewhat better performance than `traincgp` for some problems, although performance on any given problem is difficult to predict. The storage requirements for the Powell-Beale algorithm (six vectors) are slightly larger than for Polak-Ribière (four vectors).

## See Also

`traingdm` | `traingda` | `traingdx` | `trainlm` | `traincgp` | `traincgf` | `trainscg` | `trainoss` | `trainbfg`

# traincgf

---

**Purpose** Conjugate gradient backpropagation with Fletcher-Reeves updates

**Syntax** `net.trainFcn = 'traincgf'`  
`[net,tr] = train(net,...)`

**Description** `traincgf` is a network training function that updates weight and bias values according to conjugate gradient backpropagation with Fletcher-Reeves updates.

`net.trainFcn = 'traincgf'`  
`[net,tr] = train(net,...)`

Training occurs according to `traincgf`'s training parameters, shown here with their default values:

|                                             |           |                                               |
|---------------------------------------------|-----------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100       | Maximum number of epochs to train             |
| <code>net.trainParam.show</code>            | 25        | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0         | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1         | Show training GUI                             |
| <code>net.trainParam.goal</code>            | 0         | Performance goal                              |
| <code>net.trainParam.time</code>            | inf       | Maximum time to train in seconds              |
| <code>net.trainParam.min_grad</code>        | 1e-6      | Minimum performance gradient                  |
| <code>net.trainParam.max_fail</code>        | 5         | Maximum validation failures                   |
| <code>net.trainParam.searchFcn</code>       | 'srchcha' | Name of line search routine to use            |

Parameters related to line search methods (not all used for all methods):

|                                      |       |                                                                          |
|--------------------------------------|-------|--------------------------------------------------------------------------|
| <code>net.trainParam.scal_tol</code> | 20    | Divide into <code>delta</code> to determine tolerance for linear search. |
| <code>net.trainParam.alpha</code>    | 0.001 | Scale factor that determines sufficient reduction in <code>perf</code>   |



|                                     |        |                                                                                                     |
|-------------------------------------|--------|-----------------------------------------------------------------------------------------------------|
| <code>net.trainParam.beta</code>    | 0.1    | Scale factor that determines sufficiently large step size                                           |
| <code>net.trainParam.delta</code>   | 0.01   | Initial step size in interval location step                                                         |
| <code>net.trainParam.gama</code>    | 0.1    | Parameter to avoid small reductions in performance, usually set to 0.1 (see <code>srch_cha</code> ) |
| <code>net.trainParam.low_lim</code> | 0.1    | Lower limit on change in step size                                                                  |
| <code>net.trainParam.up_lim</code>  | 0.5    | Upper limit on change in step size                                                                  |
| <code>net.trainParam.maxstep</code> | 100    | Maximum step length                                                                                 |
| <code>net.trainParam.minstep</code> | 1.0e-6 | Minimum step length                                                                                 |
| <code>net.trainParam.bmax</code>    | 26     | Maximum step size                                                                                   |

## Network Use

You can create a standard network that uses `traincgf` with `feedforwardnet` or `cascadeforwardnet`.

To prepare a custom network to be trained with `traincgf`,

- 1 Set `net.trainFcn` to `'traincgf'`. This sets `net.trainParam` to `traincgf`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `traincgf`.

## Examples

Here a neural network is trained to predict median house prices.

```
[x,t] = house_dataset;
net = feedforwardnet(10,'traincgf');
net = train(net,x,t);
y = net(x)
```

## Algorithms

`traincgf` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables `X`. Each variable is adjusted according to the following:

$$X = X + a*dX;$$

where `dX` is the search direction. The parameter `a` is selected to minimize the performance along the search direction. The line search function `searchFcn` is used to locate the minimum point. The first search direction is the negative of the gradient of performance. In succeeding iterations the search direction is computed from the new gradient and the previous search direction, according to the formula

$$dX = -gX + dX\_old*Z;$$

where `gX` is the gradient. The parameter `Z` can be computed in several different ways. For the Fletcher-Reeves variation of conjugate gradient it is computed according to

$$Z = \text{normnew\_sqr}/\text{norm\_sqr};$$

where `norm_sqr` is the norm square of the previous gradient and `normnew_sqr` is the norm square of the current gradient. See page 78 of Scales (*Introduction to Non-Linear Optimization*) for a more detailed discussion of the algorithm.

Training stops when any of these conditions occurs:

- The maximum number of epochs (repetitions) is reached.
- The maximum amount of time is exceeded.
- Performance is minimized to the goal.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

**References**

Scales, L.E., *Introduction to Non-Linear Optimization*, New York, Springer-Verlag, 1985

**Definitions**

All the conjugate gradient algorithms start out by searching in the steepest descent direction (negative of the gradient) on the first iteration.

$$\mathbf{p}_0 = -\mathbf{g}_0$$

A line search is then performed to determine the optimal distance to move along the current search direction:

$$\mathbf{x}_{k+1} = \mathbf{x}_k + \alpha_k \mathbf{p}_k$$

Then the next search direction is determined so that it is conjugate to previous search directions. The general procedure for determining the new search direction is to combine the new steepest descent direction with the previous search direction:

$$\mathbf{p}_k = -\mathbf{g}_k + \beta_k \mathbf{p}_{k-1}$$

The various versions of the conjugate gradient algorithm are distinguished by the manner in which the constant  $\beta_k$  is computed. For the Fletcher-Reeves update the procedure is

$$\beta_k = \frac{\mathbf{g}_k^T \mathbf{g}_k}{\mathbf{g}_{k-1}^T \mathbf{g}_{k-1}}$$

This is the ratio of the norm squared of the current gradient to the norm squared of the previous gradient.

See [FlRe64] or [HDB96] for a discussion of the Fletcher-Reeves conjugate gradient algorithm.

The conjugate gradient algorithms are usually much faster than variable learning rate backpropagation, and are sometimes faster than `trainrp`, although the results vary from one problem to another. The conjugate gradient algorithms require only a little more storage

# traincgf

---

than the simpler algorithms. Therefore, these algorithms are good for networks with a large number of weights.

Try the *Neural Network Design* demonstration `nnd12cg` [HDB96] for an illustration of the performance of a conjugate gradient algorithm.

## See Also

`traingdm` | `traingda` | `traingdx` | `trainlm` | `traincgb` | `trainscg` | `traincgp` | `trainoss` | `trainbfg`

**Purpose** Conjugate gradient backpropagation with Polak-Ribière updates

**Syntax** `net.trainFcn = 'traincgp'`  
`[net,tr] = train(net,...)`

**Description** `traincgp` is a network training function that updates weight and bias values according to conjugate gradient backpropagation with Polak-Ribière updates.

`net.trainFcn = 'traincgp'`  
`[net,tr] = train(net,...)`

Training occurs according to `traincgp`'s training parameters, shown here with their default values:

|                                             |           |                                               |
|---------------------------------------------|-----------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100       | Maximum number of epochs to train             |
| <code>net.trainParam.show</code>            | 25        | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0         | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1         | Show training GUI                             |
| <code>net.trainParam.goal</code>            | 0         | Performance goal                              |
| <code>net.trainParam.time</code>            | inf       | Maximum time to train in seconds              |
| <code>net.trainParam.min_grad</code>        | 1e-6      | Minimum performance gradient                  |
| <code>net.trainParam.max_fail</code>        | 5         | Maximum validation failures                   |
| <code>net.trainParam.searchFcn</code>       | 'srchcha' | Name of line search routine to use            |

Parameters related to line search methods (not all used for all methods):

|                                      |       |                                                                          |
|--------------------------------------|-------|--------------------------------------------------------------------------|
| <code>net.trainParam.scal_tol</code> | 20    | Divide into <code>delta</code> to determine tolerance for linear search. |
| <code>net.trainParam.alpha</code>    | 0.001 | Scale factor that determines sufficient reduction in perf                |

# traincgp

---

|                                     |        |                                                                                                     |
|-------------------------------------|--------|-----------------------------------------------------------------------------------------------------|
| <code>net.trainParam.beta</code>    | 0.1    | Scale factor that determines sufficiently large step size                                           |
| <code>net.trainParam.delta</code>   | 0.01   | Initial step size in interval location step                                                         |
| <code>net.trainParam.gama</code>    | 0.1    | Parameter to avoid small reductions in performance, usually set to 0.1 (see <code>srch_cha</code> ) |
| <code>net.trainParam.low_lim</code> | 0.1    | Lower limit on change in step size                                                                  |
| <code>net.trainParam.up_lim</code>  | 0.5    | Upper limit on change in step size                                                                  |
| <code>net.trainParam.maxstep</code> | 100    | Maximum step length                                                                                 |
| <code>net.trainParam.minstep</code> | 1.0e-6 | Minimum step length                                                                                 |
| <code>net.trainParam.bmax</code>    | 26     | Maximum step size                                                                                   |

## Network Use

You can create a standard network that uses `traincgp` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `traincgp`,

- 1 Set `net.trainFcn` to `'traincgp'`. This sets `net.trainParam` to `traincgp`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `traincgp`.

## Examples

Examples

Here a neural network is trained to predict median house prices.

```
[x,t] = house_dataset;
net = feedforwardnet(10,'traincgp');
net = train(net,x,t);
y = net(x)
```

## Algorithms

traincgp can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables `X`. Each variable is adjusted according to the following:

$$X = X + a*dX;$$

where `dX` is the search direction. The parameter `a` is selected to minimize the performance along the search direction. The line search function `searchFcn` is used to locate the minimum point. The first search direction is the negative of the gradient of performance. In succeeding iterations the search direction is computed from the new gradient and the previous search direction according to the formula

$$dX = -gX + dX\_old*Z;$$

where `gX` is the gradient. The parameter `Z` can be computed in several different ways. For the Polak-Ribière variation of conjugate gradient, it is computed according to

$$Z = ((gX - gX\_old)'*gX)/norm\_sqr;$$

where `norm_sqr` is the norm square of the previous gradient, and `gX_old` is the gradient on the previous iteration. See page 78 of Scales (*Introduction to Non-Linear Optimization*, 1985) for a more detailed discussion of the algorithm.

Training stops when any of these conditions occurs:

- The maximum number of epochs (repetitions) is reached.
- The maximum amount of time is exceeded.
- Performance is minimized to the goal.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## References

Scales, L.E., *Introduction to Non-Linear Optimization*, New York, Springer-Verlag, 1985

## Definitions

Another version of the conjugate gradient algorithm was proposed by Polak and Ribière. As with the Fletcher-Reeves algorithm, `traincgf`, the search direction at each iteration is determined by

$$\mathbf{p}_k = -\mathbf{g}_k + \beta_k \mathbf{p}_{k-1}$$

For the Polak-Ribière update, the constant  $\beta_k$  is computed by

$$\beta_k = \frac{\Delta \mathbf{g}_{k-1}^T \mathbf{g}_k}{\mathbf{g}_{k-1}^T \mathbf{g}_{k-1}}$$

This is the inner product of the previous change in the gradient with the current gradient divided by the norm squared of the previous gradient. See [FlRe64] or [HDB96] for a discussion of the Polak-Ribière conjugate gradient algorithm.

The `traincgp` routine has performance similar to `traincgf`. It is difficult to predict which algorithm will perform best on a given problem. The storage requirements for Polak-Ribière (four vectors) are slightly larger than for Fletcher-Reeves (three vectors).

## See Also

`traingdm` | `traingda` | `traingdx` | `trainlm` | `trainrp` | `traincgf` | `traincgb` | `traingscg` | `trainoss` | `trainbfg`



**Purpose** Gradient descent backpropagation

**Syntax** `net.trainFcn = 'traingd'`  
`[net,tr] = train(net,...)`

**Description** `traingd` is a network training function that updates weight and bias values according to gradient descent.

`net.trainFcn = 'traingd'`  
`[net,tr] = train(net,...)`

Training occurs according to `traingd`'s training parameters, shown here with their default values:

|                                             |       |                                               |
|---------------------------------------------|-------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 10    | Maximum number of epochs to train             |
| <code>net.trainParam.goal</code>            | 0     | Performance goal                              |
| <code>net.trainParam.showCommandLine</code> | 0     | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1     | Show training GUI                             |
| <code>net.trainParam.lr</code>              | 0.01  | Learning rate                                 |
| <code>net.trainParam.max_fail</code>        | 5     | Maximum validation failures                   |
| <code>net.trainParam.min_grad</code>        | 1e-10 | Minimum performance gradient                  |
| <code>net.trainParam.show</code>            | 25    | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds              |

**Network Use** You can create a standard network that uses `traingd` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `traingd`,

- 1 Set `net.trainFcn` to `'traingd'`. This sets `net.trainParam` to `traingd`'s default parameters.

2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `traingd`.

See `help feedforwardnet` and `help cascadeforwardnet` for examples.

## Algorithms

`traingd` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables `X`. Each variable is adjusted according to gradient descent:

$$dX = lr * dperf/dX$$

Training stops when any of these conditions occurs:

- The maximum number of `epochs` (repetitions) is reached.
- The maximum amount of `time` is exceeded.
- Performance is minimized to the `goal`.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## Definitions

The batch steepest descent training function is `traingd`. The weights and biases are updated in the direction of the negative gradient of the performance function. If you want to train a network using batch steepest descent, you should set the network `trainFcn` to `traingd`, and then call the function `train`. There is only one training function associated with a given network.

There are seven training parameters associated with `traingd`:

- `epochs`
- `show`

- goal
- time
- min\_grad
- max\_fail
- lr

The learning rate `lr` is multiplied times the negative of the gradient to determine the changes to the weights and biases. The larger the learning rate, the bigger the step. If the learning rate is made too large, the algorithm becomes unstable. If the learning rate is set too small, the algorithm takes a long time to converge. See page 12-8 of [HDB96] for a discussion of the choice of learning rate.

The training status is displayed for every `show` iterations of the algorithm. (If `show` is set to `NaN`, then the training status is never displayed.) The other parameters determine when the training stops. The training stops if the number of iterations exceeds `epochs`, if the performance function drops below `goal`, if the magnitude of the gradient is less than `mingrad`, or if the training time is longer than `time` seconds. `max_fail`, which is associated with the early stopping technique, is discussed in Improving Generalization.

The following code creates a training set of inputs `p` and targets `t`. For batch training, all the input vectors are placed in one matrix.

```
p = [-1 -1 2 2; 0 5 0 5];
t = [-1 -1 1 1];
```

Create the feedforward network.

```
net = feedforwardnet(3,'traingd');
```

In this simple example, turn off a feature that is introduced later.

```
net.divideFcn = '';
```

# traingd

---

At this point, you might want to modify some of the default training parameters.

```
net.trainParam.show = 50;
net.trainParam.lr = 0.05;
net.trainParam.epochs = 300;
net.trainParam.goal = 1e-5;
```

If you want to use the default training parameters, the preceding commands are not necessary.

Now you are ready to train the network.

```
[net,tr] = train(net,p,t);
```

The training record `tr` contains information about the progress of training.

Now you can simulate the trained network to obtain its response to the inputs in the training set.

```
a = net(p)
a =
 -1.0026 -0.9962 1.0010 0.9960
```

Try the *Neural Network Design* demonstration `nnd12sd1` [HDB96] for an illustration of the performance of the batch gradient descent algorithm.

## See Also

`traingdm` | `traingda` | `traingdx` | `trainlm`

**Purpose** Gradient descent with adaptive learning rate backpropagation

**Syntax** `net.trainFcn = 'traingda'`  
`[net,tr] = train(net,...)`

**Description** `traingda` is a network training function that updates weight and bias values according to gradient descent with adaptive learning rate.

`net.trainFcn = 'traingda'`  
`[net,tr] = train(net,...)`

Training occurs according to `traingda`'s training parameters, shown here with their default values:

|                                             |       |                                               |
|---------------------------------------------|-------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 10    | Maximum number of epochs to train             |
| <code>net.trainParam.goal</code>            | 0     | Performance goal                              |
| <code>net.trainParam.lr</code>              | 0.01  | Learning rate                                 |
| <code>net.trainParam.lr_inc</code>          | 1.05  | Ratio to increase learning rate               |
| <code>net.trainParam.lr_dec</code>          | 0.7   | Ratio to decrease learning rate               |
| <code>net.trainParam.max_fail</code>        | 5     | Maximum validation failures                   |
| <code>net.trainParam.max_perf_inc</code>    | 1.04  | Maximum performance increase                  |
| <code>net.trainParam.min_grad</code>        | 1e-10 | Minimum performance gradient                  |
| <code>net.trainParam.show</code>            | 25    | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0     | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1     | Show training GUI                             |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds              |

**Network Use** You can create a standard network that uses `traingda` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `traingda`,

- 1 Set `net.trainFcn` to `'traingda'`. This sets `net.trainParam` to `traingda`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `traingda`.

See `help feedforwardnet` and `help cascadeforwardnet` for examples.

## Algorithms

`traingda` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `dperf` with respect to the weight and bias variables  $X$ . Each variable is adjusted according to gradient descent:

$$dX = lr * dperf / dX$$

At each epoch, if performance decreases toward the goal, then the learning rate is increased by the factor `lr_inc`. If performance increases by more than the factor `max_perf_inc`, the learning rate is adjusted by the factor `lr_dec` and the change that increased the performance is not made.

Training stops when any of these conditions occurs:

- The maximum number of epochs (repetitions) is reached.
- The maximum amount of time is exceeded.
- Performance is minimized to the goal.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## Definitions

With standard steepest descent, the learning rate is held constant throughout training. The performance of the algorithm is very sensitive to the proper setting of the learning rate. If the learning rate is set

too high, the algorithm can oscillate and become unstable. If the learning rate is too small, the algorithm takes too long to converge. It is not practical to determine the optimal setting for the learning rate before training, and, in fact, the optimal learning rate changes during the training process, as the algorithm moves across the performance surface.

You can improve the performance of the steepest descent algorithm if you allow the learning rate to change during the training process. An adaptive learning rate attempts to keep the learning step size as large as possible while keeping learning stable. The learning rate is made responsive to the complexity of the local error surface.

An adaptive learning rate requires some changes in the training procedure used by `traingd`. First, the initial network output and error are calculated. At each epoch new weights and biases are calculated using the current learning rate. New outputs and errors are then calculated.

As with momentum, if the new error exceeds the old error by more than a predefined ratio, `max_perf_inc` (typically 1.04), the new weights and biases are discarded. In addition, the learning rate is decreased (typically by multiplying by `lr_dec = 0.7`). Otherwise, the new weights, etc., are kept. If the new error is less than the old error, the learning rate is increased (typically by multiplying by `lr_inc = 1.05`).

This procedure increases the learning rate, but only to the extent that the network can learn without large error increases. Thus, a near-optimal learning rate is obtained for the local terrain. When a larger learning rate could result in stable learning, the learning rate is increased. When the learning rate is too high to guarantee a decrease in error, it is decreased until stable learning resumes.

Try the *Neural Network Design* demonstration `nnd12v1` [HDB96] for an illustration of the performance of the variable learning rate algorithm.

Backpropagation training with an adaptive learning rate is implemented with the function `traingda`, which is called just like `traingd`, except for the additional training parameters `max_perf_inc`,

lr\_dec, and lr\_inc. Here is how it is called to train the previous two-layer network:

```
p = [-1 -1 2 2; 0 5 0 5];
t = [-1 -1 1 1];
net = feedforwardnet(3,'traingda');
net.trainParam.lr = 0.05;
net.trainParam.lr_inc = 1.05;
net = train(net,p,t);
y = net(p)
```

## See Also

[traingd](#) | [traingdm](#) | [traingdx](#) | [trainlm](#)



**Purpose** Gradient descent with momentum backpropagation

**Syntax** `net.trainFcn = 'traingdm'`  
`[net,tr] = train(net,...)`

**Description** `traingdm` is a network training function that updates weight and bias values according to gradient descent with momentum.

```
net.trainFcn = 'traingdm'
[net,tr] = train(net,...)
```

Training occurs according to `traingdm`'s training parameters, shown here with their default values:

|                                             |       |                                   |
|---------------------------------------------|-------|-----------------------------------|
| <code>net.trainParam.epochs</code>          | 10    | Maximum number of epochs to train |
| <code>net.trainParam.goal</code>            | 0     | Performance goal                  |
| <code>net.trainParam.lr</code>              | 0.01  | Learning rate                     |
| <code>net.trainParam.max_fail</code>        | 5     | Maximum validation failures       |
| <code>net.trainParam.mc</code>              | 0.9   | Momentum constant                 |
| <code>net.trainParam.min_grad</code>        | 1e-10 | Minimum performance gradient      |
| <code>net.trainParam.show</code>            | 25    | Epochs between showing progress   |
| <code>net.trainParam.showCommandLine</code> | 0     | Generate command-line output      |
| <code>net.trainParam.showWindow</code>      | 1     | Show training GUI                 |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds  |

**Network Use** You can create a standard network that uses `traingdm` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `traingdm`,

**1** Set `net.trainFcn` to `'traingdm'`. This sets `net.trainParam` to `traingdm`'s default parameters.

2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `traingdm`.

See `help feedforwardnet` and `help cascadeforwardnet` for examples.

## Algorithms

`traingdm` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables  $X$ . Each variable is adjusted according to gradient descent with momentum,

$$dX = mc*dX_{prev} + lr*(1-mc)*dperf/dX$$

where  $dX_{prev}$  is the previous change to the weight or bias.

Training stops when any of these conditions occurs:

- The maximum number of epochs (repetitions) is reached.
- The maximum amount of time is exceeded.
- Performance is minimized to the goal.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## Definitions

In addition to `traingd`, there are three other variations of gradient descent.

Gradient descent with momentum, implemented by `traingdm`, allows a network to respond not only to the local gradient, but also to recent trends in the error surface. Acting like a lowpass filter, momentum allows the network to ignore small features in the error surface. Without momentum a network can get stuck in a shallow local minimum. With momentum a network can slide through such a minimum. See page 12–9 of [HDB96] for a discussion of momentum.

Gradient descent with momentum depends on two training parameters. The parameter `lr` indicates the learning rate, similar to the simple gradient descent. The parameter `mc` is the momentum constant that defines the amount of momentum. `mc` is set between 0 (no momentum) and values close to 1 (lots of momentum). A momentum constant of 1 results in a network that is completely insensitive to the local gradient and, therefore, does not learn properly.)

```
p = [-1 -1 2 2; 0 5 0 5];
t = [-1 -1 1 1];
net = feedforwardnet(3,'traingdm');
net.trainParam.lr = 0.05;
net.trainParam.mc = 0.9;
net = train(net,p,t);
y = net(p)
```

Try the *Neural Network Design* demonstration `nnd12mo` [HDB96] for an illustration of the performance of the batch momentum algorithm.

**See Also**

`traingd` | `traingda` | `traingdx` | `trainlm`

# traingdx

---

**Purpose** Gradient descent with momentum and adaptive learning rate backpropagation

**Syntax** `net.trainFcn = 'traingdx'`  
`[net,tr] = train(net,...)`

**Description** `traingdx` is a network training function that updates weight and bias values according to gradient descent momentum and an adaptive learning rate.

`net.trainFcn = 'traingdx'`  
`[net,tr] = train(net,...)`

Training occurs according to `traingdx`'s training parameters, shown here with their default values:

|                                             |       |                                               |
|---------------------------------------------|-------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 10    | Maximum number of epochs to train             |
| <code>net.trainParam.goal</code>            | 0     | Performance goal                              |
| <code>net.trainParam.lr</code>              | 0.01  | Learning rate                                 |
| <code>net.trainParam.lr_inc</code>          | 1.05  | Ratio to increase learning rate               |
| <code>net.trainParam.lr_dec</code>          | 0.7   | Ratio to decrease learning rate               |
| <code>net.trainParam.max_fail</code>        | 5     | Maximum validation failures                   |
| <code>net.trainParam.max_perf_inc</code>    | 1.04  | Maximum performance increase                  |
| <code>net.trainParam.mc</code>              | 0.9   | Momentum constant                             |
| <code>net.trainParam.min_grad</code>        | 1e-10 | Minimum performance gradient                  |
| <code>net.trainParam.show</code>            | 25    | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0     | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1     | Show training GUI                             |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds              |

## Network Use

You can create a standard network that uses `traingdx` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `traingdx`,

- 1 Set `net.trainFcn` to `'traingdx'`. This sets `net.trainParam` to `traingdx`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `traingdx`.

See `help feedforwardnet` and `help cascadeforwardnet` for examples.

## Algorithms

`traingdx` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables  $X$ . Each variable is adjusted according to gradient descent with momentum,

$$dX = mc*dXprev + lr*mc*dperf/dX$$

where `dXprev` is the previous change to the weight or bias.

For each epoch, if performance decreases toward the goal, then the learning rate is increased by the factor `lr_inc`. If performance increases by more than the factor `max_perf_inc`, the learning rate is adjusted by the factor `lr_dec` and the change that increased the performance is not made.

Training stops when any of these conditions occurs:

- The maximum number of `epochs` (repetitions) is reached.
- The maximum amount of `time` is exceeded.
- Performance is minimized to the `goal`.
- The performance gradient falls below `min_grad`.

# traingdx

---

- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## Definitions

The function `traingdx` combines adaptive learning rate with momentum training. It is invoked in the same way as `traingda`, except that it has the momentum coefficient `mc` as an additional training parameter.

## See Also

`traingd` | `traingda` | `traingdm` | `trainlm`

**Purpose** Levenberg-Marquardt backpropagation

**Syntax** `net.trainFcn = 'trainlm'`  
`[net,tr] = train(net,...)`

**Description** `trainlm` is a network training function that updates weight and bias values according to Levenberg-Marquardt optimization.

`trainlm` is often the fastest backpropagation algorithm in the toolbox, and is highly recommended as a first-choice supervised algorithm, although it does require more memory than other algorithms.

```
net.trainFcn = 'trainlm'
[net,tr] = train(net,...)
```

Training occurs according to `trainlm`'s training parameters, shown here with their default values:

|                                             |       |                                               |
|---------------------------------------------|-------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 1000  | Maximum number of epochs to train             |
| <code>net.trainParam.goal</code>            | 0     | Performance goal                              |
| <code>net.trainParam.max_fail</code>        | 6     | Maximum validation failures                   |
| <code>net.trainParam.min_grad</code>        | 1e-7  | Minimum performance gradient                  |
| <code>net.trainParam.mu</code>              | 0.001 | Initial mu                                    |
| <code>net.trainParam.mu_dec</code>          | 0.1   | mu decrease factor                            |
| <code>net.trainParam.mu_inc</code>          | 10    | mu increase factor                            |
| <code>net.trainParam.mu_max</code>          | 1e10  | Maximum mu                                    |
| <code>net.trainParam.show</code>            | 25    | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0     | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1     | Show training GUI                             |
| <code>net.trainParam.time</code>            | inf   | Maximum time to train in seconds              |

Validation vectors are used to stop training early if the network performance on the validation vectors fails to improve or remains the same for `max_fail` epochs in a row. Test vectors are used as a further check that the network is generalizing well, but do not have any effect on training.

`trainlm` is the default training function for several network creation functions including `newcf`, `newtdnn`, `newff`, and `newnarx`.

## Network Use

You can create a standard network that uses `trainlm` with `feedforwardnet` or `cascaforwardnet`.

To prepare a custom network to be trained with `trainlm`,

- 1 Set `net.trainFcn` to `'trainlm'`. This sets `net.trainParam` to `trainlm`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `trainlm`.

See `help feedforwardnet` and `help cascaforwardnet` for examples.

## Examples

Here a neural network is trained to predict median house prices.

```
[x,t] = house_dataset;
net = feedforwardnet(10,'trainlm');
net = train(net,x,t);
y = net(x)
```

## Algorithms

`trainlm` supports training with validation and test vectors if the network's `NET.divideFcn` property is set to a data division function. Validation vectors are used to stop training early if the network performance on the validation vectors fails to improve or remains the same for `max_fail` epochs in a row. Test vectors are used as a further check that the network is generalizing well, but do not have any effect on training.



`trainlm` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate the Jacobian  $jX$  of performance `perf` with respect to the weight and bias variables  $X$ . Each variable is adjusted according to Levenberg-Marquardt,

$$\begin{aligned} jj &= jX * jX \\ je &= jX * E \\ dX &= -(jj+I*mu) \setminus je \end{aligned}$$

where  $E$  is all errors and  $I$  is the identity matrix.

The adaptive value  $\mu$  is increased by `mu_inc` until the change above results in a reduced performance value. The change is then made to the network and  $\mu$  is decreased by `mu_dec`.

The parameter `mem_reduc` indicates how to use memory and speed to calculate the Jacobian  $jX$ . If `mem_reduc` is 1, then `trainlm` runs the fastest, but can require a lot of memory. Increasing `mem_reduc` to 2 cuts some of the memory required by a factor of two, but slows `trainlm` somewhat. Higher states continue to decrease the amount of memory needed and increase training times.

Training stops when any of these conditions occurs:

- The maximum number of `epochs` (repetitions) is reached.
- The maximum amount of `time` is exceeded.
- Performance is minimized to the `goal`.
- The performance gradient falls below `min_grad`.
- $\mu$  exceeds `mu_max`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## Definitions

Like the quasi-Newton methods, the Levenberg-Marquardt algorithm was designed to approach second-order training speed without having to compute the Hessian matrix. When the performance function has

the form of a sum of squares (as is typical in training feedforward networks), then the Hessian matrix can be approximated as

$$\mathbf{H} = \mathbf{J}^T \mathbf{J}$$

and the gradient can be computed as

$$\mathbf{g} = \mathbf{J}^T \mathbf{e}$$

where  $\mathbf{J}$  is the Jacobian matrix that contains first derivatives of the network errors with respect to the weights and biases, and  $\mathbf{e}$  is a vector of network errors. The Jacobian matrix can be computed through a standard backpropagation technique (see [HaMe94]) that is much less complex than computing the Hessian matrix.

The Levenberg-Marquardt algorithm uses this approximation to the Hessian matrix in the following Newton-like update:

$$\mathbf{x}_{k+1} = \mathbf{x}_k - [\mathbf{J}^T \mathbf{J} + \mu \mathbf{I}]^{-1} \mathbf{J}^T \mathbf{e}$$

When the scalar  $\mu$  is zero, this is just Newton's method, using the approximate Hessian matrix. When  $\mu$  is large, this becomes gradient descent with a small step size. Newton's method is faster and more accurate near an error minimum, so the aim is to shift toward Newton's method as quickly as possible. Thus,  $\mu$  is decreased after each successful step (reduction in performance function) and is increased only when a tentative step would increase the performance function. In this way, the performance function is always reduced at each iteration of the algorithm.

The original description of the Levenberg-Marquardt algorithm is given in [Marq63]. The application of Levenberg-Marquardt to neural network training is described in [HaMe94] and starting on page 12-19 of [HDB96]. This algorithm appears to be the fastest method for training moderate-sized feedforward neural networks (up to several hundred weights). It also has an efficient implementation in MATLAB<sup>®</sup> software, because the solution of the matrix equation is a built-in function, so its attributes become even more pronounced in a MATLAB environment.

Try the *Neural Network Design* demonstration `nnd12m` [HDB96] for an illustration of the performance of the batch Levenberg-Marquardt algorithm.

**Limitations**

This function uses the Jacobian for calculations, which assumes that performance is a mean or sum of squared errors. Therefore, networks trained with this function must use either the `mse` or `sse` performance function.

# trainoss

---

**Purpose** One-step secant backpropagation

**Syntax** `net.trainFcn = 'trainoss'`  
`[net,tr] = train(net,...)`

**Description** `trainoss` is a network training function that updates weight and bias values according to the one-step secant method.

`net.trainFcn = 'trainoss'`  
`[net,tr] = train(net,...)`

Training occurs according to `trainoss`'s training parameters, shown here with their default values:

|                                             |           |                                               |
|---------------------------------------------|-----------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100       | Maximum number of epochs to train             |
| <code>net.trainParam.show</code>            | 25        | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0         | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1         | Show training GUI                             |
| <code>net.trainParam.goal</code>            | 0         | Performance goal                              |
| <code>net.trainParam.time</code>            | inf       | Maximum time to train in seconds              |
| <code>net.trainParam.min_grad</code>        | 1e-6      | Minimum performance gradient                  |
| <code>net.trainParam.max_fail</code>        | 5         | Maximum validation failures                   |
| <code>net.trainParam.searchFcn</code>       | 'srchcha' | Name of line search routine to use            |

Parameters related to line search methods (not all used for all methods):

|                                      |       |                                                                          |
|--------------------------------------|-------|--------------------------------------------------------------------------|
| <code>net.trainParam.scal_tol</code> | 20    | Divide into <code>delta</code> to determine tolerance for linear search. |
| <code>net.trainParam.alpha</code>    | 0.001 | Scale factor that determines sufficient reduction in <code>perf</code>   |

|                                     |        |                                                                                                     |
|-------------------------------------|--------|-----------------------------------------------------------------------------------------------------|
| <code>net.trainParam.beta</code>    | 0.1    | Scale factor that determines sufficiently large step size                                           |
| <code>net.trainParam.delta</code>   | 0.01   | Initial step size in interval location step                                                         |
| <code>net.trainParam.gama</code>    | 0.1    | Parameter to avoid small reductions in performance, usually set to 0.1 (see <code>srch_cha</code> ) |
| <code>net.trainParam.low_lim</code> | 0.1    | Lower limit on change in step size                                                                  |
| <code>net.trainParam.up_lim</code>  | 0.5    | Upper limit on change in step size                                                                  |
| <code>net.trainParam.maxstep</code> | 100    | Maximum step length                                                                                 |
| <code>net.trainParam.minstep</code> | 1.0e-6 | Minimum step length                                                                                 |
| <code>net.trainParam.bmax</code>    | 26     | Maximum step size                                                                                   |

## Network Use

You can create a standard network that uses `trainoss` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `trainoss`:

- 1 Set `net.trainFcn` to `'trainoss'`. This sets `net.trainParam` to `trainoss`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `trainoss`.

## Examples

Here a neural network is trained to predict median house prices.

```
[x,t] = house_dataset;
net = feedforwardnet(10,'trainoss');
net = train(net,x,t);
y = net(x)
```

## Algorithms

`trainoss` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables `X`. Each variable is adjusted according to the following:

$$X = X + a*dX;$$

where `dX` is the search direction. The parameter `a` is selected to minimize the performance along the search direction. The line search function `searchFcn` is used to locate the minimum point. The first search direction is the negative of the gradient of performance. In succeeding iterations the search direction is computed from the new gradient and the previous steps and gradients, according to the following formula:

$$dX = -gX + Ac*X\_step + Bc*dgX;$$

where `gX` is the gradient, `X_step` is the change in the weights on the previous iteration, and `dgX` is the change in the gradient from the last iteration. See Battiti (*Neural Computation*, Vol. 4, 1992, pp. 141–166) for a more detailed discussion of the one-step secant algorithm.

Training stops when any of these conditions occurs:

- The maximum number of `epochs` (repetitions) is reached.
- The maximum amount of `time` is exceeded.
- Performance is minimized to the `goal`.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## References

Battiti, R., “First and second order methods for learning: Between steepest descent and Newton’s method,” *Neural Computation*, Vol. 4, No. 2, 1992, pp. 141–166

## Definitions

Because the BFGS algorithm requires more storage and computation in each iteration than the conjugate gradient algorithms, there is need

for a secant approximation with smaller storage and computation requirements. The one step secant (OSS) method is an attempt to bridge the gap between the conjugate gradient algorithms and the quasi-Newton (secant) algorithms. This algorithm does not store the complete Hessian matrix; it assumes that at each iteration, the previous Hessian was the identity matrix. This has the additional advantage that the new search direction can be calculated without computing a matrix inverse.

The one step secant method is described in [Batt92]. This algorithm requires less storage and computation per epoch than the BFGS algorithm. It requires slightly more storage and computation per epoch than the conjugate gradient algorithms. It can be considered a compromise between full quasi-Newton algorithms and conjugate gradient algorithms.

**See Also**

`traingdm` | `traingda` | `traingdx` | `trainlm` | `trainrp` | `traingcf` | `traingcb` | `traingcg` | `traingcp` | `traingbf`

# trainr

---

**Purpose** Random order incremental training with learning functions

**Syntax**

```
net.trainFcn = 'trainr'
[net,tr] = train(net,...)
```

**Description** `trainr` is not called directly. Instead it is called by `train` for networks whose `net.trainFcn` property is set to 'trainr', thus:

```
net.trainFcn = 'trainr'
[net,tr] = train(net,...)
```

`trainr` trains a network with weight and bias learning rules with incremental updates after each presentation of an input. Inputs are presented in random order.

Training occurs according to `trainr`'s training parameters, shown here with their default values:

|                                             |     |                                               |
|---------------------------------------------|-----|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100 | Maximum number of epochs to train             |
| <code>net.trainParam.goal</code>            | 0   | Performance goal                              |
| <code>net.trainParam.show</code>            | 25  | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0   | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1   | Show training GUI                             |
| <code>net.trainParam.time</code>            | inf | Maximum time to train in seconds              |

**Network Use** You can create a standard network that uses `trainr` by calling `competlayer` or `selforgmap`. To prepare a custom network to be trained with `trainr`,

- 1 Set `net.trainFcn` to 'trainr'. This sets `net.trainParam` to `trainr`'s default parameters.
- 2 Set each `net.inputWeights{i,j}.learnFcn` to a learning function.



- 3 Set each `net.layerWeights{i,j}.learnFcn` to a learning function.
- 4 Set each `net.biases{i}.learnFcn` to a learning function. (Weight and bias learning parameters are automatically set to default values for the given learning function.)

To train the network,

- 1 Set `net.trainParam` properties to desired values.
- 2 Set weight and bias learning parameters to desired values.
- 3 Call `train`.

See `help competlayer` and `help selforgmap` for training examples.

## Algorithms

For each epoch, all training vectors (or sequences) are each presented once in a different random order, with the network and weight and bias values updated accordingly after each individual presentation.

Training stops when any of these conditions is met:

- The maximum number of epochs (repetitions) is reached.
- Performance is minimized to the goal.
- The maximum amount of time is exceeded.

## See Also

`train`

# trainrp

---

**Purpose** Resilient backpropagation

**Syntax** `net.trainFcn = 'trainrp'`  
`[net,tr] = train(net,...)`

**Description** `trainrp` is a network training function that updates weight and bias values according to the resilient backpropagation algorithm (Rprop).

`net.trainFcn = 'trainrp'`  
`[net,tr] = train(net,...)`

Training occurs according to `trainrp`'s training parameters, shown here with their default values:

|                                             |      |                                               |
|---------------------------------------------|------|-----------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100  | Maximum number of epochs to train             |
| <code>net.trainParam.show</code>            | 25   | Epochs between displays (NaN for no displays) |
| <code>net.trainParam.showCommandLine</code> | 0    | Generate command-line output                  |
| <code>net.trainParam.showWindow</code>      | 1    | Show training GUI                             |
| <code>net.trainParam.goal</code>            | 0    | Performance goal                              |
| <code>net.trainParam.time</code>            | inf  | Maximum time to train in seconds              |
| <code>net.trainParam.min_grad</code>        | 1e-6 | Minimum performance gradient                  |
| <code>net.trainParam.max_fail</code>        | 5    | Maximum validation failures                   |
| <code>net.trainParam.lr</code>              | 0.01 | Learning rate                                 |
| <code>net.trainParam.delt_inc</code>        | 1.2  | Increment to weight change                    |
| <code>net.trainParam.delt_dec</code>        | 0.5  | Decrement to weight change                    |
| <code>net.trainParam.delta0</code>          | 0.07 | Initial weight change                         |
| <code>net.trainParam.deltamax</code>        | 50.0 | Maximum weight change                         |

## Network Use

You can create a standard network that uses `trainrp` with `feedforwardnet` or `cascadeforwardnet`.

To prepare a custom network to be trained with `trainrp`,

- 1 Set `net.trainFcn` to `'trainrp'`. This sets `net.trainParam` to `trainrp`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `trainrp`.

## Examples

Here is a problem consisting of inputs `p` and targets `t` to be solved with a network.

```
p = [0 1 2 3 4 5];
t = [0 0 0 1 1 1];
```

A two-layer feed-forward network with two hidden neurons and this training function is created.

Create and test a network.

```
net = feedforwardnet(2,'trainrp');
```

Here the network is trained and retested.

```
net.trainParam.epochs = 50;
net.trainParam.show = 10;
net.trainParam.goal = 0.1;
net = train(net,p,t);
a = net(p)
```

See `help feedforwardnet` and `help cascadeforwardnet` for other examples.

## Algorithms

`trainrp` can train any network as long as its weight, net input, and transfer functions have derivative functions.

Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables `X`. Each variable is adjusted according to the following:

```
dX = deltaX.*sign(gX);
```

where the elements of `deltaX` are all initialized to `delta0`, and `gX` is the gradient. At each iteration the elements of `deltaX` are modified. If an element of `gX` changes sign from one iteration to the next, then the corresponding element of `deltaX` is decreased by `delta_dec`. If an element of `gX` maintains the same sign from one iteration to the next, then the corresponding element of `deltaX` is increased by `delta_inc`. See Riedmiller, *Proceedings of the IEEE International Conference on Neural Networks (ICNN)*, San Francisco, 1993, pp. 586 to 591.

Training stops when any of these conditions occurs:

- The maximum number of `epochs` (repetitions) is reached.
- The maximum amount of `time` is exceeded.
- Performance is minimized to the `goal`.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

## References

Riedmiller, *Proceedings of the IEEE International Conference on Neural Networks (ICNN)*, San Francisco, 1993, pp. 586–591

## Definitions

Multilayer networks typically use sigmoid transfer functions in the hidden layers. These functions are often called “squashing” functions, because they compress an infinite input range into a finite output range. Sigmoid functions are characterized by the fact that their slopes must approach zero as the input gets large. This causes a problem when you use steepest descent to train a multilayer network with sigmoid

functions, because the gradient can have a very small magnitude and, therefore, cause small changes in the weights and biases, even though the weights and biases are far from their optimal values.

The purpose of the resilient backpropagation (Rprop) training algorithm is to eliminate these harmful effects of the magnitudes of the partial derivatives. Only the sign of the derivative can determine the direction of the weight update; the magnitude of the derivative has no effect on the weight update. The size of the weight change is determined by a separate update value. The update value for each weight and bias is increased by a factor `delt_inc` whenever the derivative of the performance function with respect to that weight has the same sign for two successive iterations. The update value is decreased by a factor `delt_dec` whenever the derivative with respect to that weight changes sign from the previous iteration. If the derivative is zero, the update value remains the same. Whenever the weights are oscillating, the weight change is reduced. If the weight continues to change in the same direction for several iterations, the magnitude of the weight change increases. A complete description of the Rprop algorithm is given in [ReBr93].

The following code recreates the previous network and trains it using the Rprop algorithm. The training parameters for `trainrp` are `epochs`, `show`, `goal`, `time`, `min_grad`, `max_fail`, `delt_inc`, `delt_dec`, `delta0`, and `deltamax`. The first eight parameters have been previously discussed. The last two are the initial step size and the maximum step size, respectively. The performance of Rprop is not very sensitive to the settings of the training parameters. For the example below, the training parameters are left at the default values:

```
p = [-1 -1 2 2;0 5 0 5];
t = [-1 -1 1 1];
net = feedforwardnet(3,'trainrp');
net = train(net,p,t);
y = net(p)
```

`rprop` is generally much faster than the standard steepest descent algorithm. It also has the nice property that it requires only a modest

# trainrp

---

increase in memory requirements. You do need to store the update values for each weight and bias, which is equivalent to storage of the gradient.

## See Also

`traingdm` | `traingda` | `traingdx` | `trainlm` | `traingcg` | `traingcf` | `traingcb` | `traingcg` | `traingss` | `traingbf`

**Purpose** Unsupervised random order weight/bias training

**Syntax**

```
net.trainFcn = 'trainru'
[net,tr] = train(net,...)
```

**Description** trainru is not called directly. Instead it is called by train for networks whose net.trainFcn property is set to 'trainru', thus:

```
net.trainFcn = 'trainru'
[net,tr] = train(net,...)
```

trainru trains a network with weight and bias learning rules with incremental updates after each presentation of an input. Inputs are presented in random order.

Training occurs according to trainr's training parameters, shown here with their default values:

|                                |     |                                               |
|--------------------------------|-----|-----------------------------------------------|
| net.trainParam.epochs          | 100 | Maximum number of epochs to train             |
| net.trainParam.goal            | 0   | Performance goal                              |
| net.trainParam.show            | 25  | Epochs between displays (NaN for no displays) |
| net.trainParam.showCommandLine | 0   | Generate command-line output                  |
| net.trainParam.showWindow      | 1   | Show training GUI                             |
| net.trainParam.time            | Inf | Maximum time to train in seconds              |

**Network Use** To prepare a custom network to be trained with trainru,

- 1 Set net.trainFcn to 'trainru'. This sets net.trainParam to trainru's default parameters.
- 2 Set each net.inputWeights{i,j}.learnFcn to a learning function.
- 3 Set each net.layerWeights{i,j}.learnFcn to a learning function.

- 4 Set each `net.biases{i}.learnFcn` to a learning function. (Weight and bias learning parameters are automatically set to default values for the given learning function.)

To train the network,

- 1 Set `net.trainParam` properties to desired values.
- 2 Set weight and bias learning parameters to desired values.
- 3 Call `train`.

## Algorithms

For each epoch, all training vectors (or sequences) are each presented once in a different random order, with the network and weight and bias values updated accordingly after each individual presentation.

Training stops when any of these conditions is met:

- The maximum number of epochs (repetitions) is reached.
- The maximum amount of time is exceeded.

## See Also

`train` | `trainr`



|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Purpose</b>     | Sequential order incremental training with learning functions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax</b>      | <pre>net.trainFcn = 'trains'<br/>[net,tr] = train(net,...)</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b> | <p>trains is not called directly. Instead it is called by train for networks whose net.trainFcn property is set to 'trains', thus:</p> <pre>net.trainFcn = 'trains'<br/>[net,tr] = train(net,...)</pre> <p>trains trains a network with weight and bias learning rules with sequential updates. The sequence of inputs is presented to the network with updates occurring after each time step.</p> <p>This incremental training algorithm is commonly used for adaptive applications.</p>                                                                                                                                                                                                                                                                                                               |
| <b>Network Use</b> | <p>You can create a standard network that uses trains for adapting by calling perceptron or linearlayer.</p> <p>To prepare a custom network to adapt with trains,</p> <ol style="list-style-type: none"><li>1 Set net.adaptFcn to 'trains'. This sets net.adaptParam to trains's default parameters.</li><li>2 Set each net.inputWeights{i,j}.learnFcn to a learning function. Set each net.layerWeights{i,j}.learnFcn to a learning function. Set each net.biases{i}.learnFcn to a learning function. (Weight and bias learning parameters are automatically set to default values for the given learning function.)</li></ol> <p>To allow the network to adapt,</p> <ol style="list-style-type: none"><li>1 Set weight and bias learning parameters to desired values.</li><li>2 Call adapt.</li></ol> |

# trains

---

See `help perceptron` and `help linearlayer` for adaption examples.

## **Algorithms**

Each weight and bias is updated according to its learning function after each time step in the input sequence.

## **See Also**

`train` | `trainb` | `trainc` | `trainr`

**Purpose** Scaled conjugate gradient backpropagation

**Syntax** `net.trainFcn = 'trainscg'`  
`[net,tr] = train(net,...)`

**Description** `trainscg` is a network training function that updates weight and bias values according to the scaled conjugate gradient method.

`net.trainFcn = 'trainscg'`  
`[net,tr] = train(net,...)`

Training occurs according to `trainscg`'s training parameters, shown here with their default values:

|                                             |        |                                                                |
|---------------------------------------------|--------|----------------------------------------------------------------|
| <code>net.trainParam.epochs</code>          | 100    | Maximum number of epochs to train                              |
| <code>net.trainParam.show</code>            | 25     | Epochs between displays (NaN for no displays)                  |
| <code>net.trainParam.showCommandLine</code> | 0      | Generate command-line output                                   |
| <code>net.trainParam.showWindow</code>      | 1      | Show training GUI                                              |
| <code>net.trainParam.goal</code>            | 0      | Performance goal                                               |
| <code>net.trainParam.time</code>            | inf    | Maximum time to train in seconds                               |
| <code>net.trainParam.min_grad</code>        | 1e-6   | Minimum performance gradient                                   |
| <code>net.trainParam.max_fail</code>        | 5      | Maximum validation failures                                    |
| <code>net.trainParam.sigma</code>           | 5.0e-5 | Determine change in weight for second derivative approximation |
| <code>net.trainParam.lambda</code>          | 5.0e-7 | Parameter for regulating the indefiniteness of the Hessian     |

**Network Use** You can create a standard network that uses `trainscg` with `feedforwardnet` or `cascadeforwardnet`. To prepare a custom network to be trained with `trainscg`,

- 1 Set `net.trainFcn` to `'trainscg'`. This sets `net.trainParam` to `trainscg`'s default parameters.
- 2 Set `net.trainParam` properties to desired values.

In either case, calling `train` with the resulting network trains the network with `trainscg`.

## Examples

Here is a problem consisting of inputs `p` and targets `t` to be solved with a network.

```
p = [0 1 2 3 4 5];
t = [0 0 0 1 1 1];
```

A two-layer feed-forward network with two hidden neurons and this training function is created.

```
net = feedforwardnet(2,'trainscg');
```

Here the network is trained and retested.

```
net = train(net,p,t);
a = net(p)
```

See `help feedforwardnet` and `help cascadeforwardnet` for other examples.

## Algorithms

`trainscg` can train any network as long as its weight, net input, and transfer functions have derivative functions. Backpropagation is used to calculate derivatives of performance `perf` with respect to the weight and bias variables  $X$ .

The scaled conjugate gradient algorithm is based on conjugate directions, as in `traincgp`, `traincgf`, and `traincgb`, but this algorithm does not perform a line search at each iteration. See Moller (*Neural Networks*, Vol. 6, 1993, pp. 525–533) for a more detailed discussion of the scaled conjugate gradient algorithm.

Training stops when any of these conditions occurs:

- The maximum number of epochs (repetitions) is reached.
- The maximum amount of time is exceeded.
- Performance is minimized to the goal.
- The performance gradient falls below `min_grad`.
- Validation performance has increased more than `max_fail` times since the last time it decreased (when using validation).

**References**

Moller, *Neural Networks*, Vol. 6, 1993, pp. 525–533


**See Also**

`traingdm` | `traingda` | `traingdx` | `trainlm` | `trainrp` | `traingcf` | `traingcb` | `trainbfg` | `traingcp` | `trainoss`

## Purpose

Triangular basis transfer function

## Graph and Symbol



Triangular Basis Function

## Syntax

$A = \text{tribas}(N, FP)$

## Description

`tribas` is a neural transfer function. Transfer functions calculate a layer's output from its net input.

$A = \text{tribas}(N, FP)$  takes  $N$  and optional function parameters,

|      |                                             |
|------|---------------------------------------------|
| $N$  | S-by-Q matrix of net input (column) vectors |
| $FP$ | Struct of function parameters (ignored)     |

and returns  $A$ , an S-by-Q matrix of the triangular basis function applied to each element of  $N$ .

`info = tribas('code')` can take the following forms to return specific information:

`tribas('name')` returns the name of this function.

`tribas('output', FP)` returns the [min max] output range.

`tribas('active', FP)` returns the [min max] active input range.

`tribas('fullderiv')` returns 1 or 0, depending on whether `dA_dN` is S-by-S-by-Q or S-by-Q.

`tribas('fpname')` returns the names of the function parameters.

`tribas('fpdefaults')` returns the default function parameters.

## Examples

Here you create a plot of the tribas transfer function.

```
n = -5:0.1:5;
a = tribas(n);
plot(n,a)
```

Assign this transfer function to layer `i` of a network.

```
net.layers{i}.transferFcn = 'tribas';
```

## Algorithms

```
a = tribas(n) = 1 - abs(n), if -1 <= n <= 1
 = 0, otherwise
```

## See Also

`sim` | `radbas`

# tritop

---

**Purpose** Triangle layer topology function

**Syntax** `pos = triptop(dim1,dim2,...,dimN)`

**Description** tritop calculates neuron positions for layers whose neurons are arranged in an N-dimensional triangular grid.

`pos = triptop(dim1,dim2,...,dimN)` takes N arguments,

`dimi`            Length of layer in dimension `i`

and returns an N-by-S matrix of N coordinate vectors, where S is the product of `dim1*dim2*...*dimN`.

**Examples** This code creates and displays a two-dimensional layer with 40 neurons arranged in an 8-by-5 triangular grid.

```
pos = triptop(8,5);
net = selforgmap([8 5], 'topologyFcn', 'tritop');
plotsomtop(net)
```

**See Also** `gridtop` | `hextop` | `randtop`



**Purpose** Unconfigure network inputs and outputs

**Syntax**

```
unconfigure(net)
unconfigure(net, 'inputs', i)
unconfigure(net, 'outputs', i)
```

**Description**

`unconfigure(net)` returns a network with its input and output sizes set to 0, its input and output processing settings and related weight initialization settings set to values consistent with zero-sized signals. The new network will be ready to be reconfigured for data of the same or different dimensions than it was previously configured for.

`unconfigure(net, 'inputs', i)` unconfigures the inputs indicated by the indices `i`. If no indices are specified, all inputs are unconfigured.

`unconfigure(net, 'outputs', i)` unconfigures the outputs indicated by the indices `i`. If no indices are specified, all outputs are unconfigured.

**Examples**

Here a network is configured for a simple fitting problem, and then unconfigured.

```
[x,t] = simplefit_dataset;
net = fitnet(10);
view(net)
net = configure(net,x,t);
view(net)
net = unconfigure(net)
view(net)
```

**See Also** `configure` | `isconfigured`

# vec2ind

---

**Purpose** Convert vectors to indices

**Syntax** ind2vec  
vec2ind

**Description** ind2vec and vec2ind allow indices to be represented either by themselves or as vectors containing a 1 in the row of the index they represent.

vec2ind(vec) takes one argument,

vec                    Matrix of vectors, each containing a single 1

and returns the indices of the 1s.

**Examples** Here four vectors (each containing only one “1” element) are defined, and the indices of the 1s are found.

```
vec = [1 0 0 0; 0 0 1 0; 0 1 0 1]
ind = vec2ind(vec)
```

**See Also** ind2vec

|                    |                                                                                                                                  |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Purpose</b>     | View neural network                                                                                                              |
| <b>Syntax</b>      | <code>view(net)</code>                                                                                                           |
| <b>Description</b> | <code>view(net)</code> launches a window that shows your neural network (specified in <code>net</code> ) as a graphical diagram. |

**view**

---

## A

adapt function 1-2

## B

backtracking search 1-347

boxdist function 1-10

Brent's search 1-352

## C

cascadeforwardnet function 1-13

catelements function 1-14

catsamples function 1-15

catsignals function 1-17

cattimesteps function 1-18

cellmat function 1-19

Charalambous' search 1-357

closeloop function 1-20

combvec function 1-21

compet function 1-22

competlayer function 1-24

con2seq function 1-25

concur function 1-27

configure function 1-28

confusion function 1-30

conjugate gradient algorithms

    Fletcher-Reeves update 1-413

    Polak-Ribiere update 1-418

    Powell-Beale restarts 1-409

convwf function 1-32

## D

defaultderiv function 1-34

demonstrations

    nnd12cg 1-414

    nnd12m 1-437

    nnd12mo 1-429

    nnd12sd1 1-362

    nnd12sd1 batch gradient 1-422

    nnd12v1 1-425

disp function 1-36

display function 1-37

dist function 1-38

distdelaynet function 1-41

divideblock function 1-42

divideind function 1-43

divideint function 1-45

dividerand function 1-46

dividetrain function 1-47

dotprod function 1-48

## E

elliott2sig function 1-51

elliotsig function 1-50

elmannet function 1-52

errsurf function 1-54

extendts function 1-55

## F

feedforwardnet function 1-56

fitnet function 1-58

fixunknowns function 1-59

Fletcher-Reeves update 1-413

formwb function 1-62

fpderiv function 1-63

fromnndata function 1-65

## G

gadd function 1-67

gdivide function 1-68

gensim function 1-69

getelements function 1-70

getsamples function 1-71

getsignals function 1-72

getsiminit function 1-73

gettimesteps function 1-75

getwb function 1-76  
gmultiply function 1-77  
gnegate function 1-78  
golden section search 1-362  
gpu2nndata function 1-79  
gradient descent algorithm  
    batch 1-420  
gridtop function 1-81  
gsqrt function 1-82  
gsubtract function 1-83

## H

hardlim function 1-84  
hardlims function 1-86  
hextop function 1-88  
hybrid bisection cubic search 1-367

## I

ind2vec function 1-89  
init function 1-90  
initcon function 1-92  
initial step size function 1-447  
initlay function 1-94  
initlvq function 1-96  
initnw function 1-97  
initsompc function 1-99  
initwb function 1-100  
initzero function 1-101  
input vectors  
    dimension reduction 1-284  
isconfigured function 1-103

## J

Jacobian matrix 1-436

## L

layrechnet function 1-104

learncon function 1-105  
learngd function 1-108  
learngdm function 1-111  
learnh function 1-114  
learnhd function 1-117  
learning rates  
    adaptive 1-425  
    optimal 1-425  
learnis function 1-120  
learnk function 1-123  
learnlv1 function 1-126  
learnlv2 function 1-129  
learnos function 1-132  
learnp function 1-135  
learnpn function 1-138  
learnsom function 1-141  
learnwh function 1-148  
Levenberg-Marquardt algorithm 1-435  
line search functions  
    backtracking search 1-347  
    Brent's search 1-352  
    Charalambous' search 1-357  
    golden section search 1-362  
    hybrid bisection cubic search 1-367  
linearlayer function 1-151  
linkdist function 1-153  
logsig function 1-155  
lvqnet function 1-157  
lvqoutputs function 1-159

## M

mae function 1-160  
mandist function 1-162  
mapminmax function 1-164  
mapstd function 1-167  
maximum step size function 1-447  
maxlinlr function 1-170  
meanabs function 1-171  
meansqr function 1-172

midpoint function 1-173  
minmax function 1-174  
mse function 1-175

## N

narnet function 1-177  
narxnet function 1-178  
nctool function 1-180  
negdist function 1-181  
netinv function 1-183  
netprod function 1-185  
netsum function 1-187  
network function 1-189  
newgrnn function 1-195  
newlind function 1-197  
newpnn function 1-199  
newrb function 1-201  
newrbe function 1-203  
Newton's method 1-436  
nftool function 1-205  
nncell2mat function 1-206  
nncorr function 1-207  
nndata function 1-209  
nndata2gpu function 1-211  
nndata2sim function 1-213  
nnsim function 1-214  
nnstart function 1-215  
nntool function 1-216  
nntraintool function 1-217  
noloop function 1-218  
normalization  
    inputs and targets 1-165  
    mean and standard deviation 1-168  
normc function 1-219  
normprod function 1-220  
normr function 1-222  
nprtool function 1-223  
ntstool function 1-224  
num2deriv function 1-225

num5deriv function 1-227  
numelements function 1-229  
numfinite function 1-230  
numnan function 1-231  
numsamples function 1-232  
numsignals function 1-233  
numtimesteps function 1-234

## O

one step secant algorithm 1-441  
openloop function 1-235

## P

patternnet function 1-236  
perceptron function 1-237  
perform function 1-239  
plotconfusion function 1-241  
plotep function 1-242  
ploterrcorr function 1-243  
ploterrhist function 1-244  
plotes function 1-245  
plotfit function 1-246  
plotinerrcorr function 1-247  
plotpc function 1-248  
plotperform function 1-250  
plotpv function 1-252  
plotresponse function 1-255  
plotroc function 1-256  
plotsom function 1-258  
plotsomhits function 1-259  
plotsomnc function 1-261  
plotsomnd function 1-261 1-263  
plotsomplanes function 1-265  
plotsompos function 1-267  
plotsomtop function 1-269  
plottrainstate function 1-271  
plotv function 1-273  
plotvec function 1-274

plotwb function 1-275  
pnormc function 1-277  
Polak-Ribière update 1-418  
poslin function 1-278  
Powell-Beale restarts 1-409  
preparets function 1-280  
principal component analysis 1-284  
processpca function 1-282  
prune function 1-286  
prunedata function 1-288  
purelin function 1-290

## Q

quant function 1-292  
quasi-Newton algorithm 1-347

## R

radbas function 1-293  
radbasn function 1-295  
randnc function 1-297  
randnr function 1-298  
rands function 1-299  
randtop function 1-303  
regression function 1-304  
removeconstantrows function 1-305  
removerows function 1-308  
revert function 1-310

## S

sae function 1-313  
satlin function 1-315  
satlins function 1-317  
scalprod function 1-319  
selforgmap function 1-321  
separatewb function 1-323  
seq2con function 1-324  
setelements function 1-325  
setsamples function 1-326

setsignals function 1-327  
setsiminit function 1-328  
settimesteps function 1-330  
setwb function 1-331  
sim function 1-332  
sim2nndata function 1-340  
soft max transfer function 1-341  
softmax function 1-341  
squashing functions 1-446  
srchbac function 1-343  
srchbre function 1-348  
srchcha function 1-353  
srchgol function 1-358  
srchhyb function 1-363  
sse function 1-368  
staticderiv function 1-370  
sumabs function 1-372  
sumsqr function 1-373

## T

tansig function 1-374  
tapdelay function 1-376  
timedelaynet function 1-377  
tonndata function 1-378  
train function 1-380  
trainb function 1-388  
trainbfg function 1-390  
trainbfgc function 1-394  
trainbr function 1-398  
trainc function 1-404  
traincgb function 1-406  
traincgf function 1-410  
traincgp function 1-415  
traingd function 1-419  
traingda function 1-423  
traingdm function 1-427  
traingdx function 1-430  
trainlm function 1-433  
trainoss function 1-438



trainr function 1-442  
trainrp function 1-444  
trainru function 1-449  
trains function 1-451  
trainscg function 1-453  
transformation matrix 1-284  
tribas function 1-456  
tritop function 1-458

**U**

unconfigure function 1-459

**V**

variable learning rate algorithm 1-425  
vec2ind function 1-460  
view function 1-461