



Symbolic Math Toolbox™ Release Notes

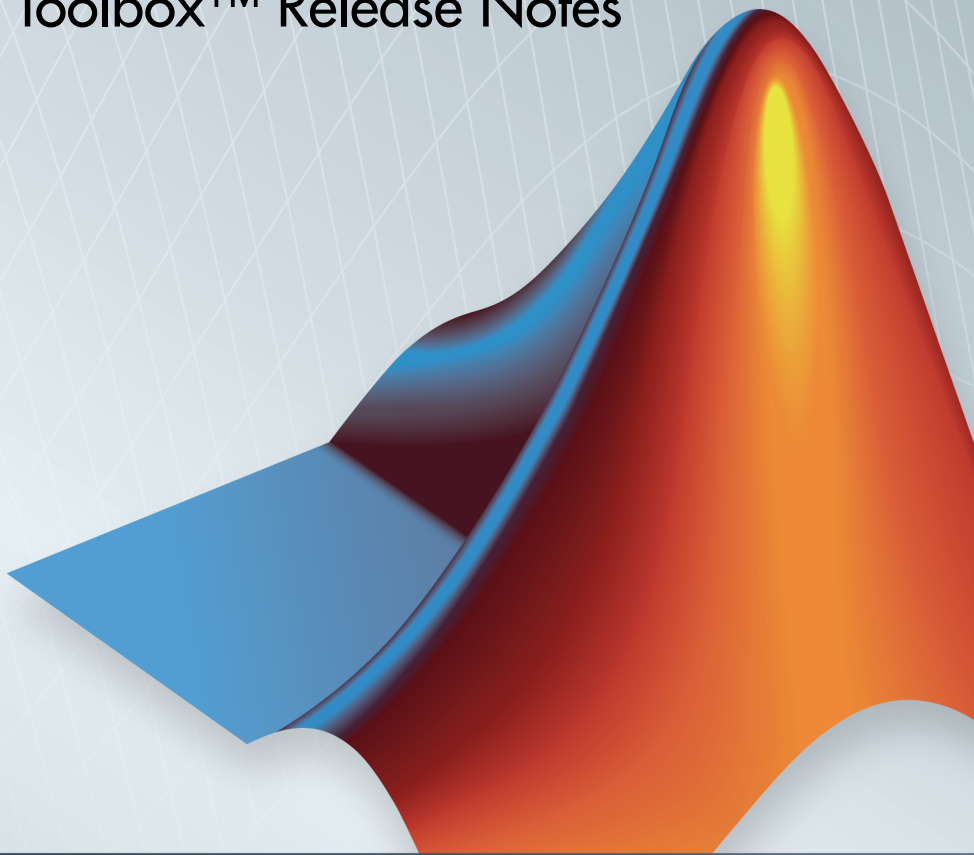

MATLAB®

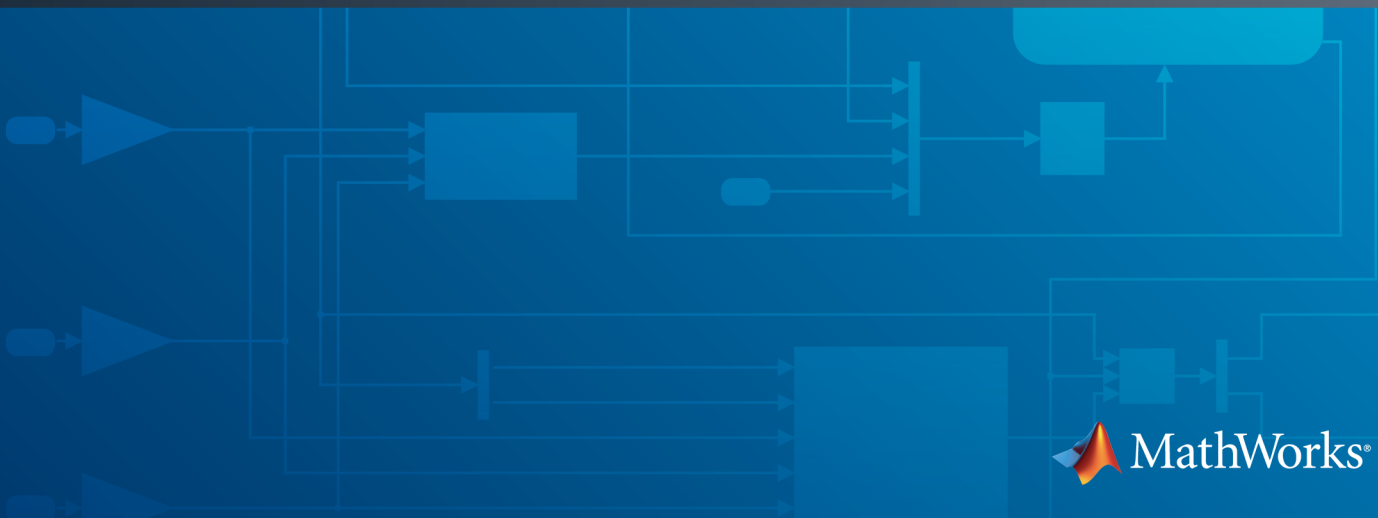

How to Contact MathWorks



Latest news: www.mathworks.com
Sales and services: www.mathworks.com/sales_and_services
User community: www.mathworks.com/matlabcentral
Technical support: www.mathworks.com/support/contact_us



Phone: 508-647-7000



The MathWorks, Inc.
3 Apple Hill Drive
Natick, MA 01760-2098

Symbolic Math Toolbox™ Release Notes

© COPYRIGHT 2004–2014 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

R2014b

MATLAB solve function returning parameters and conditions in solutions	1-2
Functions for analyzing and reducing systems of differential algebraic equations (DAEs), such as isLowIndexDAE and reduceDAEIndex	1-2
MATLAB functions representing orthogonal polynomials: chebyshevT, chebyshevU, legendreP, laguerreL, hermiteH, jacobiP, and gegenbauerC	1-3
MATLAB pade function for computing Padé approximation	1-4
funm function for computing matrix functions	1-4
MATLAB kummerU function for computing confluent hypergeometric (Kummer U) function	1-4
MATLAB polylog function for computing polylogarithms ..	1-4
MATLAB signIm function for computing signs of imaginary parts of complex numbers	1-4
MATLAB in function for representing conditions on symbolic inputs	1-4
MATLAB divisors function for finding divisors of integers and polynomials	1-5
MATLAB functions nnz and nonzeros for finding nonzero elements in a symbolic array	1-5

MATLAB pochhammer function to calculate Pochhammer symbol	1-5
MATLAB kroneckerDelta function for computing the Kronecker delta function	1-5
MATLAB dirac function with two input arguments for computing derivatives of the Dirac delta function	1-5
MATLAB isAlways function warns when returning false for undecidable inputs	1-5
MuPAD generate::fortran function can use Fortran 90 as the target compiler	1-6
MATLAB mod function for computing modulus after division	1-6
MATLAB gcd and lcm functions accept vectors and matrices	1-7
MATLAB rem function accepts vectors and matrices	1-7
MATLAB factor function only accepts scalar inputs and returns vector of factors of input	1-8
MuPAD Notebook app supports left and right double square brackets	1-8
Functionality being removed or changed	1-8

R2014a

MATLAB functions for computing special integrals, gamma functions, dilogarithm function, and number-theoretic functions	2-2
MATLAB function qr for computing symbolic QR factorization	2-2

MATLAB function combine for combining symbolic expressions with multiple calls to the same function	2-3
MATLAB functions max and min for finding the largest and smallest elements of a symbolic array	2-3
vpasolve can use random starting points when searching for solutions	2-3
Support for Unicode characters in MuPAD that includes using Asian language characters in strings and text	2-3
Support for specifying encoding in MuPAD file operations .	2-4
Choice of right- or left-handed spherical coordinate system for the MuPAD vector analysis functions	2-4
MATLAB special functions and functions for computing integral and Z-transforms accept several nonscalar arguments	2-5
MATLAB function erfc accepts two arguments	2-5
Functionality being removed or changed	2-5

R2013b

MATLAB evaluateMuPADNotebook and allMuPADNotebooks functions to evaluate MuPAD notebooks and return list of open notebooks	3-2
bernstein function for approximating functions using Bernstein polynomials, and bernsteinMatrix function for computing Bezier curves	3-2
MATLAB cumsum and cumprod functions for computing cumulative sums and products	3-2

MATLAB isfinite, isinf, and isnan functions for testing for finite, infinite, and NaN elements in symbolic arrays	3-2
ExclusiveConditions option that makes MuPAD piecewise function equivalent to an if-elif-end_if statement . . .	3-3
MATLAB mupadNotebookTitle function to find the window title of the MuPAD notebook	3-3
MATLAB close function to close MuPAD notebooks from MATLAB	3-3
diff supports mixed derivatives	3-3
coeffs function extracts coefficients of multivariate polynomials	3-3
linspace, logspace, and compan functions for symbolic objects	3-4
Indexing uses lists, vectors, and matrices of indices	3-4
MuPAD lets you set assumptions on matrices	3-4
int, symprod, and symsum let you specify lower and upper bounds as vectors	3-4
Functionality being removed or changed	3-4

R2013a

Linear algebra functions for computing matrix factorizations (lu, chol), pseudoinverse, orthogonal basis, and adjoint .	4-2
Verification of solutions of systems of equations and arbitrary symbolic function substitution in subs function	4-2

Simplification for more types of trigonometric and hyperbolic expressions and expressions with nested roots	4-2
Special functions for computing polar angle, atan2 function, imaginary error function, and exponential and elliptic integrals	4-3
toeplitz function for creating Toeplitz matrices	4-4
sqrtn function for computing square roots of matrices	4-4
sign function for computing signs of numbers	4-4
Real option of the linalg::orthog function for avoiding complex conjugates	4-4
Real option of the linalg::factorCholesky function for avoiding complex conjugates	4-4
New arguments of the svd function for computing the “economy size” singular value decomposition	4-5
isequaln function for testing equality of symbolic objects .	4-5
Control over the order in which solve and vpasolve functions return solutions	4-5
Functionality being removed or changed	4-5

R2012b

MATLAB symbolic matrix analysis functions for characteristic (charpoly) and minimal (minpoly) polynomials and for norm (norm) and condition (cond) number	5-2
poles function for determining the poles of an expression .	5-2

vpasolve function for solving equations and systems using variable precision arithmetic	5-2
Functions for converting linear systems of equations to matrix form AX=B (equationsToMatrix) and solving matrix equations (linsolve)	5-2
MATLAB symbolic functions for describing pulses: rectangularPulse and triangularPulse	5-3
MuPAD functions for computing integral and Z-transforms	5-3
MuPAD Pref::fourierParameters function for specifying Fourier parameters	5-3
MuPAD functions for adding transform patterns	5-3
noFlatten option of the MuPAD proc function for preventing sequence flattening	5-4
testtype uses testtypeDom slot for overloading by the second argument	5-4
New upper limit on the number of digits in double	5-4
New definition for real and imag	5-5
Functionality being removed or changed	5-5

R2012a

New Special Functions	6-2
New Vector Analysis Functions	6-2
Computations with Symbolic Functions	6-2
Assumptions on Variables	6-3

New Relational Operators Create Equations, Inequalities, and Relations	6-3
New Logical Operators Create Logical Expressions	6-3
New Functions Test Validity of Symbolic Equations, Inequalities, and Relations	6-4
New Functions Manipulate Symbolic Expressions	6-4
New odeToVectorField Function Converts Higher-Order Differential Equations to Systems of First-Order Differential Equations	6-4
New Calling Syntax for the taylor Function	6-5
New MuPAD Functions Compute Rectangular and Triangular Pulse Functions	6-5
MuPAD det, linalg::det, inverse, linsolve, and linalg::matlinsolve Functions Accept the New Normal Option	6-5
MuPAD linalg::matlinsolve Function Accepts the New ShowAssumptions Option	6-6
Enhanced MuPAD pdivide Function	6-6
Improved MuPAD prog::remember Function	6-6
Functionality Being Removed or Changed	6-6

R2011b

MATLAB Editor Now Supports MuPAD Program Files	7-2
dsolve, expand, int, simple, simplify, and solve Accept More Options	7-2

New read Function Reads MuPAD Program Files in MATLAB	7-2
New symprod Function Computes Products of Series	7-2
New hessian Function Computes Hessian Matrices	7-2
New gradient Function Computes Vector Gradients	7-2
New erfc Function Computes the Complementary Error Function	7-3
New psi Function Computes the Digamma and Polygamma Functions	7-3
New wrightOmega Function Computes the Wright omega Function	7-3
New simplifyFraction Function Simplifies Expressions	7-3
New MuPAD simplifyRadical Function Simplifies Radicals in Arithmetical Expressions	7-3
pretty Function Now Uses Abbreviations in Long Output Expressions for Better Readability	7-3
MuPAD normal Function Accepts the New Expand Option .	7-3
Modified MuPAD groebner Library	7-4
MuPAD groebner::gbasis Function Accepts the New Factor and IgnoreSpecialCases Options	7-4
New MuPAD Functions for Computing Logarithms	7-4
Functionality Being Removed or Changed	7-5

Expression Wrapping of Math Output in the MuPAD Notebook Interface	8-2
Symbolic Solver Handles More Non-Algebraic Equations ..	8-2
Improved Performance in the Ordinary Differential Equation Solver	8-2
Improved Performance for Polynomial Arithmetic Operations	8-2
New MuPAD <code>polylib::subresultant</code> Function Computes Subresultants of Polynomials	8-2
MuPAD <code>partfrac</code> Function Accepts the New List Option ...	8-2
New MuPAD <code>inverf</code> and <code>inverfc</code> Functions Compute the Inverses of Error Functions	8-2
New MuPAD <code>numlib::checkPrimalityCertificate</code> Function Tests Primality Certificates	8-3
New Demos	8-3
Functionality Being Removed or Changed	8-3

<code>sym</code> Function Creates Matrices of Symbolic Variables	9-2
<code>generate::Simscape</code> Function Generates Simscape Equations from MuPAD Expressions	9-2
MuPAD Code Generation Functions Accept the New NoWarning Option	9-2

Improved MuPAD Hyperlink Dialog Box	9-2
MuPAD Notebook Highlights Matched and Unmatched Delimiters	9-2
Improved Performance When Solving Linear Systems in a Matrix Form	9-2
MuPAD Solver for Ordinary Differential Equations Handles More Equation Types	9-2
New Syntax for the MuPAD prog::getOptions Function	9-3
New Syntax for the MuPAD prog::trace Function	9-3
Improved Interface for Arithmetical Operations on Polynomials	9-3
MuPAD igcd Function Now Accepts Complex Numbers as Arguments	9-3
Enhanced Solver For Factorable Polynomial Systems	9-3
MuPAD Now Evaluates Large Sums with Subtractions Faster	9-4
MuPAD freeIndets Function Accepts the New All Option . .	9-4
Functionality Being Removed or Changed	9-4

R2010a

When Opening Notebook, MuPAD Can Jump to Particular Locations	10-2
simscapeEquation Function Generates Simscape Equations from Symbolic Expressions	10-2
New Calling Syntax for the sort Function	10-2

Changes in the symengine Function	10-2
64-Bit GUI Support for Macintosh	10-2
New MuPAD Print Preview Dialog	10-2
Improved Configure MuPAD Dialog Box	10-3
MuPAD Support for Basic Arithmetic Operations for Lists	10-3
Improved Performance When Operating on Matrices with Symbolic Elements	10-3
Enhanced MuPAD divide Function	10-3
Improved Performance for Operations on Polynomials . . .	10-3
MuPAD coeff Function Accepts the New All Option	10-4
MuPAD expand Function Accepts the New ArithmeticOnly Option	10-4
MuPAD expand Function Now Expands Powers of Products	10-4
New Calling Syntax for MuPAD rationalize Function	10-4
Enhanced MuPAD simplify and Simplify Functions	10-4
MuPAD subs Function Accepts the New EvalChanges Option	10-4
MuPAD Solver for Ordinary Differential Equations Handles More Equation Types	10-5
Functionality Being Removed or Changed	10-5

Support for Windows x64 and 64-Bit Macintosh	11-2
sym and syms Use Reserved Words as Variable Names . . .	11-2
Toolbox Now Displays Floating-Point Results with Their Original Precision	11-2
New MuPAD Preference Pref::outputDigits Controls Floating- Point Outputs	11-3
Solver for Ordinary Differential Equations Handles More Equation Types	11-3
MuPAD limit Function Supports Limits for Incomplete Gamma Function and Exponential Integral Function . .	11-3
Enhanced Simplification Routines for MuPAD Special Functions	11-3
Enhanced MuPAD combine Function for Logarithms	11-3
MuPAD normal Function Accepts New Options	11-3
Functionality Being Removed or Changed	11-3

dsolve Accepts the New Option IgnoreAnalyticConstraints	12-2
emlBlock Function Generates Embedded MATLAB Function Blocks from Symbolic Objects	12-2
matlabFunction Improves Control over Input and Output Parameters	12-2

Enhancements to Object-Oriented Programming	
Capabilities	12-3
generate::MATLAB Function Converts MuPAD Expressions to	
MATLAB Code	12-3
MuPAD IgnoreAnalyticConstraints Option Specifies That	
Core Functions Apply Common Algebraic Assumptions to	
Simplify Results	12-3
MuPAD Outputs Contain Abbreviations for Better	
Readability	12-3
MuPAD Solver for Ordinary Differential Equations Handles	
More Equation Types	12-4
MuPAD limit Function Now Can Compute Limits for	
Piecewise Functions	12-4
New and Improved MuPAD Special Functions	12-4
New Calling Syntax for Test Report Function prog::tcov ..	12-4
New Demos	12-4

R2008b

Bug Fixes

R2008a+

Bug Fixes

R2007b+

MuPAD Engine Replaces Maple Engine	15-2
New MuPAD Language and Libraries Supplant Extended Symbolic Math Toolbox Software	15-5
New MuPAD Help Viewer (GUI)	15-6
New MuPAD Notebook Interface (GUI)	15-6
New MuPAD Editor and Debugger (GUI)	15-6
New Functionality for Communication Between MATLAB Workspace and MuPAD	15-6
New symengine Command for Choosing a Maple Engine ..	15-7
New matlabFunction Generates MATLAB Functions	15-7

R2008a

Bug Fixes

R2007b

Bug Fixes

Maple10 Access Added for Linux 64-bit Processors and Intel Macintosh Platforms	18-2
---	-------------

Change in call to code generation package using the maple function	19-2
---	-------------

R2014b

Version: 6.1

New Features

Bug Fixes

Compatibility Considerations

MATLAB `solve` function returning parameters and conditions in solutions

The MATLAB[®] symbolic `solve` function returns the parameters in a solution and the conditions under which a solution is valid when the `ReturnConditions` option is specified as `true`.

Compatibility Considerations

- Do not specify equations and variables as character strings. Instead of string inputs, declare symbolic variables using `syms`, and then pass them as input arguments separated by commas, or as a vector of input arguments. For example, replace

```
solve('2*r = 1, r')
```

with

```
syms r  
solve(2*r == 1, r)
```

In a future release, string input arguments will be interpreted as option names to support shortcuts, such as `ignorea` for `IgnoreAnalyticConstraints`.

- `solve` warns when it calls the numerical solver and returns a numerical output.
- `solve` does not warn if provably no solution exists.
- When the list of equations is empty, `solve` throws an error instead of a warning.

Functions for analyzing and reducing systems of differential algebraic equations (DAEs), such as `isLowIndexDAE` and `reduceDAEIndex`

These MATLAB and MuPAD[®] functions help you

- Identify subsets (blocks) of equations that can be used to define subsets of variables.
- Identify high-index differential algebraic equations.
- Reduce high-index differential algebraic equations to systems of differential index 1 or 0.
- The MATLAB symbolic `reduceDifferentialOrder` function reduces higher-order differential equations to a system of first-order differential equations. The `daetools::reduceDifferentialOrder` function provides the same functionality in MuPAD.

-
- `incidenceMatrix` computes the incidence matrix of a system of differential algebraic equations. The `daetools::incidenceMatrix` function provides the same functionality in MuPAD.
 - `reduceRedundancies` eliminates simple equations from a system of symbolic differential algebraic equations. The `daetools::reduceRedundancies` function provides the same functionality in MuPAD.
 - `findDecoupledBlocks` searches for decoupled blocks in systems of equations. The `daetools::findDecoupledBlocks` function provides the same functionality in MuPAD.
 - `isLowIndexDAE` tests if a first-order system of differential algebraic equations is of differential index 0 or 1. The `daetools::isLowIndexDAE` function provides the same functionality in MuPAD.
 - `reduceDAEIndex` converts a system of first-order differential algebraic equations to an equivalent system of differential index 1. The `daetools::reduceDAEIndex` function provides the same functionality in MuPAD.
 - `reduceDAEToODE` reduces the differential index of a system of first-order semilinear differential algebraic equations to 0. The `daetools::reduceDAEToODE` function provides the same functionality in MuPAD.
 - `daeFunction` converts a system of differential algebraic equations to a MATLAB function handle.
 - `massMatrixForm` extracts the mass matrix and the right sides of a semilinear system of symbolic differential algebraic equations. The `daetools::massMatrixForm` function provides the same functionality in MuPAD.
 - `decic` computes consistent initial conditions for `ode15i`.

MATLAB functions representing orthogonal polynomials: `chebyshevT`, `chebyshevU`, `legendreP`, `laguerreL`, `hermiteH`, `jacobiP`, and `gegenbauerC`

- The MATLAB symbolic `chebyshevT` and `chebyshevU` functions represent Chebyshev polynomials of the first and second kind, respectively.
- The MATLAB symbolic `gegenbauerC` function represents Gegenbauer polynomials.
- The MATLAB symbolic `hermiteH` function represents Hermite polynomials.
- The MATLAB symbolic `jacobiP` function represents Jacobi polynomials.
- The MATLAB symbolic `legendreP` function represents Legendre polynomials.

- The MATLAB symbolic `laguerreL` function represents Laguerre polynomials.

MATLAB `pade` function for computing Padé approximation

The MATLAB symbolic `pade` function calculates Padé approximations.

MATLAB `funm` function for computing matrix functions

The MATLAB symbolic `funm` function and the MuPAD `funm` function represent a general matrix function. A matrix function is a scalar function that maps one matrix to another, for example, function `f` in `B = f(A)` maps matrix `A` to matrix `B`.

MATLAB `kummerU` function for computing confluent hypergeometric (Kummer U) function

The MATLAB symbolic `kummerU` function computes the value of the confluent hypergeometric function. This function is also known as the Kummer U function.

MATLAB `polylog` function for computing polylogarithms

The MATLAB symbolic `polylog` function computes polylogarithms.

MATLAB `signIm` function for computing signs of imaginary parts of complex numbers

The MATLAB symbolic `signIm` function returns a sign of the imaginary part of a complex number. For all complex numbers with a nonzero imaginary part, `signIm(z) = sign(imag(z))`. For real numbers, `signIm(z) = -sign(z)`.

MATLAB `in` function for representing conditions on symbolic inputs

The MATLAB symbolic `in` function represents the condition that the input is of the specified type. The allowed types are `integer`, `real` and `rational`. The `in` function is used in the input and output of other functions such as `solve` to represent conditions on symbolic variables. If the input is a number of the specified type, the `in` function returns logical 1 (`true`), and if it is not of the specified type, the `in` function returns logical 0 (`false`).

MATLAB `divisors` function for finding divisors of integers and polynomials

The MATLAB symbolic `divisors` function computes divisors of integers and polynomials.

MATLAB functions `nnz` and `nonzeros` for finding nonzero elements in a symbolic array

The MATLAB symbolic `nnz` function computes the number of nonzero elements in a symbolic vector, matrix, or multidimensional array.

The MATLAB symbolic `nonzeros` function returns a column vector containing all nonzero elements of a symbolic vector, matrix, or multidimensional array.

MATLAB `pochhammer` function to calculate Pochhammer symbol

The MATLAB symbolic `pochhammer` function calculates the Pochhammer symbol.

MATLAB `kroneckerDelta` function for computing the Kronecker delta function

The MATLAB symbolic `kroneckerDelta` function calculates the Kronecker delta function.

MATLAB `dirac` function with two input arguments for computing derivatives of the Dirac delta function

The MATLAB symbolic `dirac` function with one input argument represents the Dirac delta function. `dirac` with two input arguments, `dirac(n,x)` represents the n th derivative of the Dirac delta function at x .

MATLAB `isAlways` function warns when returning false for undecidable inputs

The MATLAB symbolic `isAlways` function issues a warning when it returns logical 0 (`false`) for an undecidable input.

Compatibility Considerations

- In previous releases, `isAlways` did not issue a warning before returning logical 0 (`false`) for an undecidable input. To go back to this behavior, suppress the warning by specifying the `Unknown` option as `false`, as in `isAlways(cond, 'Unknown', 'false')`.

MuPAD `generate::fortran` function can use Fortran 90 as the target compiler

The MuPAD `generate::fortran` function can use Fortran 90 as the target compiler, in addition to Fortran 77.

MATLAB `mod` function for computing modulus after division

The MATLAB symbolic `mod` function finds the modulus after division as follows:
 $\text{mod}(a,b) = a - b \cdot \text{floor}(a/b)$.

Compatibility Considerations

The MATLAB symbolic `mod` function uses the same definition as the MuPAD `modp` function. Also, by default, the MuPAD `mod` operator and its functional form `_mod` are equivalent to the MuPAD `modp` function.

In previous releases, the MuPAD `modp` and `mods` functions computed the modulus after division according to these definitions:

- If a and b are integers, then $\text{modp}(a,b)$ is an integer r , such that $a = qb + r$, $0 \leq r < |b|$, and $q = a \text{ div } b$.

If b is an integer and a is a rational number, $a = u/v$, such that v and b are coprime integers, then $\text{modp}(a,b) = \text{modp}(u*w,b)$. Here, w is an inverse of $v \bmod b$, that is, $v*w \equiv 1 \pmod{b}$.

- If a and b are integers, then $\text{mods}(a,b)$ is an integer r , such that $a = qb + r$ and $-|b|/2 < r \leq |b|/2$.

If b is an integer and a is a rational number, $a = u/v$, such that v and b are coprime integers, then $\text{mods}(a,b) = \text{mods}(u*w,b)$. Here, w is an inverse of $v \bmod b$, that is, $v*w \equiv 1 \pmod{b}$.

Now, MuPAD uses the same definitions for an integer or rational a . As in previous releases, b must be an integer.

- $\text{modp}(a,b) = a - b \cdot \text{floor}(a/b)$
- $\text{mods}(a,b) = a - b \cdot \text{round}(a/b)$

In MuPAD, to get the same results as in previous releases, use the MuPAD `numlib::lincongruence` function to find a modular inverse, and then use the MuPAD modulo operator or functions, for example:

```
w := numlib::lincongruence(3, 1, 5)[1]:  
22*w mod 5;  
modp(22*w, 5);  
mods(22*w, 5);  
_mod(22*w, 5)
```

In MATLAB, to get the same results as in previous releases, use the `gcd` function with three output arguments to find a modular inverse, and then use the `mod` function as follows. For example, for $\text{mod}(a,b) = \text{mod}(u/v,b)$ use these commands:

```
[~, A, ~] = gcd(sym(v), b);  
mod(A*u, b)
```

MATLAB gcd and lcm functions accept vectors and matrices

The MATLAB symbolic `gcd` and `lcm` functions accept vectors and matrices as input arguments. If A is a vector or a matrix, then `gcd(A)` and `lcm(A)` find the greatest common divisor and least common multiple of all elements of A . If A and B are vectors or matrices of the same size, then `gcd(A,B)` and `lcm(A,B)` find the greatest common divisor and least common multiple of the pairs of elements of A and B .

MATLAB rem function accepts vectors and matrices

The MATLAB symbolic `rem` function accepts vectors and matrices as input arguments. Also, the new MuPAD `rem` function lets you compute a remainder after division in a MuPAD notebook.

Compatibility Considerations

In previous release, `rem` accepted polynomials as its input arguments. For example, `sym x; R = rem(x^2 + 2, x)` returned 2. To perform polynomial division in this and later

releases, use the `quorem` function, for example, `sym x; [~, R] = quorem(x^2 + 2, x)`.

MATLAB `factor` function only accepts scalar inputs and returns vector of factors of input

The MATLAB symbolic `factor` function only accepts scalar inputs. The `factor` function returns a symbolic vector of irreducible factors of the input.

Compatibility Considerations

The `factor` function does not accept nonscalar inputs. The output is a symbolic vector and is not of type `factored`.

MuPAD Notebook app supports left and right double square brackets

The MuPAD `Symbol::LeftDoubleBracket` and `Symbol::RightDoubleBracket` functions insert left and right double square brackets. These symbols are also called white square brackets.

Functionality being removed or changed

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
<code>mfun</code>	Still runs	Appropriate special function. For example, replace <code>mfun('P',1,2,3,4)</code> with <code>jacobiP(1,2,3,4)</code> .	Replace all instances of <code>mfun</code> with the appropriate function call. See “Special Functions” for the list of available special functions.
<code>mfunlist</code>	Still runs	See “Special Functions”.	See “Special Functions” for the list of available special functions.
<code>setVar(nb, 'MuPADvar')</code>	Warns	Three-argument version <code>setvar(nb, 'MuPADvar', MATLABe</code>	Replace all instances of <code>setvar(nb, 'MuPADvar')</code> with <code>setvar(nb, 'MuPADvar', MATLABe</code>

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
simple	Warns	simplify	Replace all instances of <code>simple(S)</code> with <code>simplify(S)</code> . There is no replacement for <code>[r,how] = simple(S)</code> .
emlBlock	Errors	matlabFunctionBlock	Replace all instances of <code>emlBlock</code> with <code>matlabFunctionBlock</code> .

R2014a

Version: 6.0

New Features

Bug Fixes

Compatibility Considerations

MATLAB functions for computing special integrals, gamma functions, dilogarithm function, and number-theoretic functions

The following special functions are available:

- The MATLAB symbolic `sinhint` and `coshint` function compute the hyperbolic sine and cosine integral functions, respectively.
- The MATLAB symbolic `ssinint` function computes the shifted sine integral function.
- The MATLAB symbolic `dawson` function computes the Dawson integral.
- The MATLAB symbolic `fresnelc` and `fresnels` functions return the Fresnel cosine and sine integral functions respectively.
- The MATLAB symbolic `logint` function computes the logarithmic integral function. This function is also called the integral logarithm.
- The MATLAB symbolic `gammaln` function computes the logarithmic gamma function.
- The MATLAB symbolic `igamma` function computes the incomplete gamma function.
- The MATLAB symbolic `dilog` function computes the dilogarithm function.
- The MATLAB symbolic `bernoulli` function computes the Bernoulli numbers and polynomials.
- The MATLAB symbolic `euler` function computes the Euler numbers and polynomials.
- The MATLAB symbolic `harmonic` function computes the harmonic function. For positive integer arguments, the harmonic function produces harmonic numbers.
- The MATLAB symbolic `catalan` function represents the Catalan constant. To approximate the Catalan constant with the current precision set by `digits`, use `vpa(catalan)`.
- The MATLAB symbolic `eulergamma` function represents the Euler-Mascheroni constant. To approximate the Euler-Mascheroni constant with the current precision set by `digits`, use `vpa(eulergamma)`.

MATLAB function `qr` for computing symbolic QR factorization

The MATLAB symbolic `qr` function computes the QR factorization of a matrix. The result can be used to solve matrix equations.

MATLAB function combine for combining symbolic expressions with multiple calls to the same function

The MATLAB symbolic combine function applies rewriting rules to the input expression to combine multiple calls to a function, and returns the rewritten expression. The analytic constraints on applying rewriting rules can be optionally relaxed when the function is called.

MATLAB functions max and min for finding the largest and smallest elements of a symbolic array

The MATLAB symbolic max and min functions return the largest and the smallest element of a symbolic vector or matrix, all elements of which are convertible to floating-point numbers. For a symbolic matrix, these functions find the largest and smallest elements of each row or column.

vpasolve can use random starting points when searching for solutions

The MATLAB numeric solver vpasolve now uses random starting points when searching for solutions if you specify `random`. This enables the solver to find different solutions for nonpolynomial equations in subsequent calls.

Support for Unicode characters in MuPAD that includes using Asian language characters in strings and text

The toolbox provides support for Unicode® characters in MuPAD (including messages to print or display), variable names, file names, and external file content.

Compatibility Considerations

In previous releases, the MuPAD `strmatch` function used `[^[]` to match any characters excluding `[`. For example, the command `strmatch("a[b", "[^[]", All)` returned `{"a", "b"}`.

Now, use `[^\[\]` to match any characters excluding `[` and `]`. Thus, rewrite the example as follows: `strmatch("a[b", "[^\[\]", All)`.

strmatch requires the same change for the closing parenthesis].

Support for specifying encoding in MuPAD file operations

The MuPAD functions for file operations, such as `finput`, `fopen`, `fprint`, `read`, `write` and more, accept the option `Encoding`. This option lets you specify the following values for encoding.

Big5	ISO-8859-1	windows-932
EUC-JP	ISO-8859-2	windows-936
GBK	ISO-8859-3	windows-949
KSC_5601	ISO-8859-4	windows-950
Macintosh	ISO-8859-9	windows-1250
Shift_JIS	ISO-8859-13	windows-1251
US-ASCII	ISO-8859-15	windows-1252
UTF-8		windows-1253
		windows-1254
		windows-1257

Choice of right- or left-handed spherical coordinate system for the MuPAD vector analysis functions

The MuPAD vector analysis functions `curl`, `divergence`, `gradient`, `laplacian`, and `linalg::ogCoordTab` let you choose between right- and left-handed spherical coordinate systems. By default, these functions use the right-handed coordinate system with [radial, polar, azimuthal] coordinates. To switch to [radial, azimuthal, polar] coordinates, specify `Spherical[LeftHanded]`.

Compatibility Considerations

In previous releases, the MuPAD vector analysis functions used the left-handed spherical coordinate system. To get the same results as in previous releases, use `'Spherical[LeftHanded]'`. To use the right-handed spherical coordinate system and suppress the warning, use `'Spherical[RightHanded]'`.

MATLAB special functions and functions for computing integral and Z-transforms accept several nonscalar arguments

The following MATLAB symbolic functions now accept more than one nonscalar argument:

- `airy` representing the Airy function
- `besseli`, `besselj`, `bessely`, and `besselk` representing the Bessel functions of the first and second kind, and the modified Bessel functions
- `beta` representing the beta function
- `ellipticE`, `ellipticF`, `ellipticPi`, and `ellipticCPi` representing the elliptic integrals
- `lambertw` representing the Lambert W function
- `whittakerM` and `whittakerW` representing the Whittaker M and Whittaker W functions
- `psi` representing the polygamma function
- `fourier` and `ifourier` representing the Fourier and inverse Fourier transforms
- `laplace` and `ilaplace` representing the Laplace and inverse Laplace transforms
- `ztrans` and `iztrans` representing the Z-transform and inverse Z-transform

MATLAB function `erfc` accepts two arguments

The MATLAB symbolic `erfc` function with one input argument represents the complementary error function. `erfc` with two input arguments represents the iterated integrals of the complementary error function, `erfc(k,x) = int(erfc(k - 1, y), y, x, inf)`.

Functionality being removed or changed

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
MuPAD <code>linalg::curl</code>	Still runs	<code>curl</code>	Replace all instances of <code>linalg::curl</code> with <code>curl</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
MuPAD <code>linalg::det</code>	Still runs	<code>det</code>	Replace all instances of <code>linalg::det</code> with <code>det</code> .
MuPAD <code>linalg::divergence</code>	Still runs	<code>divergence</code>	Replace all instances of <code>linalg::divergence</code> with <code>divergence</code> .
MuPAD <code>linalg::grad</code>	Still runs	<code>gradient</code>	Replace all instances of <code>linalg::grad</code> with <code>gradient</code> .
MuPAD <code>linalg::gradient</code>	Still runs	<code>gradient</code>	Replace all instances of <code>linalg::gradient</code> with <code>gradient</code> .
MuPAD <code>linalg::hessian</code>	Still runs	<code>hessian</code>	Replace all instances of <code>linalg::hessian</code> with <code>hessian</code> .
MuPAD <code>linalg::jacobian</code>	Still runs	<code>jacobian</code>	Replace all instances of <code>linalg::jacobian</code> with <code>jacobian</code> .
MuPAD <code>linalg::laplacian</code>	Still runs	<code>laplacian</code>	Replace all instances of <code>linalg::laplacian</code> with <code>laplacian</code> .
MuPAD <code>linalg::potential</code>	Still runs	<code>potential</code>	Replace all instances of <code>linalg::potential</code> with <code>potential</code> .
MuPAD <code>linalg::vectorPotential</code>	Still runs	<code>vectorPotential</code>	Replace all instances of <code>linalg::vectorPotential</code> with <code>vectorPotential</code> .
<code>simple</code>	Warns	<code>simplify</code>	Replace all instances of <code>simple(S)</code> with <code>simplify(S)</code> . There is no replacement for <code>[r, how] = simple(S)</code> .
<code>emlBlock</code>	Errors	<code>matlabFunctionBlock</code>	Replace all instances of <code>emlBlock</code> with <code>matlabFunctionBlock</code> .

R2013b

Version: 5.11

New Features

Bug Fixes

Compatibility Considerations

MATLAB `evaluateMuPADNotebook` and `allMuPADNotebooks` functions to evaluate MuPAD notebooks and return list of open notebooks

The MATLAB symbolic `evaluateMuPADNotebook` function lets you evaluate a MuPAD notebook from MATLAB without leaving the MATLAB Command Window or MATLAB Editor. You also can interrupt an evaluation of a MuPAD notebook from MATLAB.

The MATLAB symbolic `allMuPADNotebooks` function identifies all currently open notebooks and returns a vector of handles to them. You can use this vector to evaluate all or some of the notebooks or close them. If you already created a MuPAD notebook without a handle or if you lost the handle to a notebook, `allMuPADNotebooks` helps you create a new handle without saving the notebook.

bernstein function for approximating functions using Bernstein polynomials, and `bernsteinMatrix` function for computing Bezier curves

The MATLAB symbolic `bernstein` function and the MuPAD `bernstein` function approximate symbolic expressions and functions by Bernstein polynomials. The MATLAB symbolic `bernsteinMatrix` function and the MuPAD `bernsteinMatrix` function serve for constructing Bezier curves.

MATLAB `cumsum` and `cumprod` functions for computing cumulative sums and products

The MATLAB symbolic `cumsum` and `cumprod` functions return cumulative sums and products of elements of symbolic vectors and matrices.

MATLAB `isfinite`, `isinf`, and `isnan` functions for testing for finite, infinite, and NaN elements in symbolic arrays

The MATLAB symbolic `isfinite`, `isinf`, and `isnan` functions test whether the elements of a symbolic array are finite, infinite, or NaNs.

ExclusiveConditions option that makes MuPAD piecewise function equivalent to an if-elif-end_if statement

The new `ExclusiveConditions` option of the MuPAD `piecewise` function fixes the order of branches in a piecewise expression. Thus, `piecewise` with `ExclusiveConditions` is almost equivalent to an `if-elif-end_if` statement, except that `piecewise` takes into account assumptions on identifiers. For example, if the condition in the first branch returns `TRUE`, then `piecewise` returns the expression from the first branch. If a true condition appears in any further branch, then `piecewise` returns the expression from that branch and removes all subsequent branches.

MATLAB `mupadNotebookTitle` function to find the window title of the MuPAD notebook

The MATLAB symbolic `mupadNotebookTitle` function returns a cell array containing the window title of the MuPAD notebook. This function lets you find the title of a particular notebook as well as all currently open notebooks.

MATLAB `close` function to close MuPAD notebooks from MATLAB

The MATLAB symbolic `close` function lets you close MuPAD notebooks without leaving the MATLAB Command Window. This function also accepts the `'force'` flag suppressing the dialog box that prompts you to save changes.

`diff` supports mixed derivatives

The MATLAB symbolic `diff` function lets you compute mixed derivatives in one function call. For example, `diff(S,x,y)` differentiates the expression `S` with respect to the variables `x`, and then differentiates the result with respect to the variable `y`.

`coeffs` function extracts coefficients of multivariate polynomials

The MATLAB symbolic `coeffs` function returns coefficients of multivariate polynomials. You can specify polynomial variables as a vector of these variables. If you do not specify the polynomial variables, then `coeffs` regards all symbolic variables found in the polynomial expression as polynomial variables.

linspace, logspace, and compan functions for symbolic objects

The MATLAB linspace and logspace functions, which generate linearly and logarithmically spaced vectors, and the compan function, which finds the companion matrix, now accept symbolic numbers, variables, expressions, and functions.

Indexing uses lists, vectors, and matrices of indices

The MuPAD `_index` function and its equivalent `[]` now accept lists, vectors, and matrices as indices.

MuPAD lets you set assumptions on matrices

The MuPAD `assume`, `assumeAlso`, `assuming`, and `assumingAlso` functions let you set assumptions on matrices.

int, symprod, and symsum let you specify lower and upper bounds as vectors

The MATLAB symbolic `int`, `symprod`, and `symsum` functions accept integration, summation, and product intervals specified by row and column vectors. For example, `int(expr,var,[a,b])`, `int(expr,var,[a b])`, and `int(expr,var,[a;b])` are equivalent to `int(expr,var,a,b)`.

Functionality being removed or changed

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
<code>simple</code>	Still runs	<code>simplify</code>	Replace all instances of <code>simple(S)</code> with <code>simplify(S)</code> . There is no replacement for <code>[r, how] = simple(S)</code> .
<code>emlBlock</code>	Warns	<code>matlabFunctionBlock</code>	Replace all instances of <code>emlBlock</code> with <code>matlabFunctionBlock</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
<code>diff</code> and <code>int</code> methods for inputs of the <code>char</code> type	Errors	<code>sym</code>	Use the <code>sym</code> method instead.
MuPAD factoring functions <code>numlib::mpqs</code> , <code>numlib::pollard</code> , and <code>numlib::ecm</code>	Errors	<code>ifactor</code>	Replace all instances of <code>numlib::mpqs</code> , <code>numlib::pollard</code> , and <code>numlib::ecm</code> with <code>ifactor</code> .
MuPAD <code>Dom::SparseMatrixF2</code> domain	Errors	<code>Dom::Matrix(Dom::IntegerMod(2))</code>	Replace all instances of <code>Dom::SparseMatrixF2</code> with <code>Dom::Matrix(Dom::IntegerMod(2))</code> .
MuPAD <code>userinfo</code>	Errors	<code>print</code>	Use <code>print</code> instead of <code>userinfo</code> .
MuPAD <code>setuserinfo</code>	Errors	<code>prog::trace</code> or <code>debug</code>	Try using <code>prog::trace</code> or <code>debug</code> instead of <code>setuserinfo</code> .

R2013a

Version: 5.10

New Features

Bug Fixes

Compatibility Considerations

Linear algebra functions for computing matrix factorizations (`lu`, `chol`), pseudoinverse, orthogonal basis, and adjoint

- `lu` computes the LU factorization of a matrix. Permutation information can be returned as a matrix or as a row vector.
- `chol` computes the Cholesky factorization of a matrix. The result can be returned as an upper or lower triangular matrix. Permutation information can be returned as a matrix or as a row vector.
- `pinv` computes the Moore-Penrose pseudoinverse of a matrix.
- `orth` computes an orthonormal basis for the range of a symbolic matrix.
- `adjoint` computes the adjoint of a symbolic square matrix.

Verification of solutions of systems of equations and arbitrary symbolic function substitution in `subs` function

The MATLAB symbolic `subs` function lets you:

- Verify solutions of systems of equations by substituting the solutions returned by `solve` back into the systems
- Substitute elements of a symbolic expression with arbitrary symbolic functions

Compatibility Considerations

`subs(s,old,new,0)` will not accept 0 in a future release. Replace all instances of `subs(s,old,new,0)` with `subs(s,old,new)`. The `subs` function does not switch `old` and `new` anymore.

`subs` does not return double-precision floating-point results anymore. Instead, it consistently returns symbolic results. To convert such results to double-precision numbers, use `double`.

Simplification for more types of trigonometric and hyperbolic expressions and expressions with nested roots

The MATLAB symbolic `simplify` function and the MuPAD `simplify` function achieve better simplification of trigonometric expressions and expressions with nested roots.

The MATLAB symbolic `simplify` function accepts the new `Criterion` option. This option lets you discourage `simplify` from returning results containing complex numbers.

The MuPAD `simplify` function accepts two new options:

- `Steps` specifies the number of internal simplification steps.
- `Seconds` limits the time allowed for the internal simplification process.

Compatibility Considerations

The default number of simplification steps used by the MATLAB symbolic `simplify` function and the MuPAD `simplify` function changed from 100 to 1.

The `FinalValuation` option used in MuPAD `Simplify` function calls is renamed. The new name is `Criterion`.

Special functions for computing polar angle, `atan2` function, imaginary error function, and exponential and elliptic integrals

- `angle` computes the polar angle of a complex value.
- `atan2` computes the four-quadrant inverse tangent (arctangent).
- `erfi` computes the imaginary error function.
- `ei` computes the one-argument exponential integral.
- `expint` computes the two-argument exponential integral.

The following new MATLAB symbolic functions compute elliptic integrals:

- `ellipticK` computes the complete elliptic integral of the first kind.
- `ellipticF` computes the incomplete elliptic integral of the first kind.
- `ellipticE` computes the complete and incomplete elliptic integrals of the second kind.
- `ellipticCK` computes the complementary complete elliptic integral of the first kind.
- `ellipticCE` computes the complementary complete elliptic integral of the second kind.
- `ellipticPi` computes the complete and incomplete elliptic integrals of the third kind.
- `ellipticCPi` computes the complementary complete elliptic integral of the third kind.
- `ellipke` computes the complete elliptic integrals of the first and second kinds simultaneously.

toeplitz function for creating Toeplitz matrices

The new MATLAB symbolic `toeplitz` function generates a symbolic Toeplitz matrix from two vectors that specify its first column and first row. This function can also generate a symmetric Toeplitz matrix from one vector.

The MuPAD `linalg::toeplitz` function now generates a Toeplitz matrix from two vectors that specify its first column and first row. (In MuPAD, vectors are created as 1-by- n or n -by-1 matrices.) `linalg::toeplitz` accepts the new syntaxes along with the existing syntaxes.

sqrtm function for computing square roots of matrices

The MATLAB symbolic `sqrtm` function computes the square root of a symbolic matrix.

sign function for computing signs of numbers

The MATLAB symbolic `sign` function returns signs of symbolic real and complex values. The sign of a complex value z is defined as $z/abs(z)$.

Real option of the linalg::orthog function for avoiding complex conjugates

The MuPAD `linalg::orthog` function accepts the new `Real` option. This option lets you avoid using a complex scalar product in the orthogonalization process.

Real option of the linalg::factorCholesky function for avoiding complex conjugates

The MuPAD `linalg::factorCholesky` function accepts the new `Real` option. When you use this option, `linalg::factorCholesky` assumes that the input matrix is real and symmetric, and does not apply complex conjugation in the course of the algorithm.

Compatibility Considerations

`linalg::factorCholesky` can now compute the Cholesky factorization of a complex Hermitian positive definite matrix. In previous releases, `linalg::factorCholesky` required the input matrix to be symmetric even when working with complex entries. To get the same results as in previous releases for symmetric matrices, use the `Real` option.

New arguments of the `svd` function for computing the “economy size” singular value decomposition

`svd` accepts the new arguments `0` and `'econ'` that let you compute the “economy size” singular value decomposition of a matrix.

`isequaln` function for testing equality of symbolic objects

The MATLAB `isequaln` function tests symbolic objects for equality, treating NaN values as equal.

Control over the order in which `solve` and `vpasolve` functions return solutions

The MATLAB symbolic `solve` and `vpasolve` functions now let you control the order in which they return solutions. To ensure the order of the returned solutions, explicitly specify the independent (input) variables. For example, the syntax `[b,a] = solve(eqns,b,a)` guarantees the order of the returned solutions, while the syntax `[b,a] = solve(eqns)` does not.

Functionality being removed or changed

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
<code>simple</code>	Still runs	<code>simplify</code>	Replace all instances of <code>simple(S)</code> with <code>simplify(S)</code> . There is no replacement for <code>[r, how] = simple(S)</code> .
<code>emlBlock</code>	Warns	<code>matlabFunctionBlock</code>	Replace all instances of <code>emlBlock</code> with <code>matlabFunctionBlock</code> .
MuPAD factoring functions <code>numlib::mpqs</code> , <code>numlib::pollard</code> , and <code>numlib::ecm</code>	Warns	<code>ifactor</code>	Replace all instances of <code>numlib::mpqs</code> , <code>numlib::pollard</code> , and <code>numlib::ecm</code> with <code>ifactor</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
MuPAD <code>Dom::SparseMatrixF2</code> domain	Warns	<code>Dom::Matrix(Dom::IntegerMod(2))</code>	Replace all instances of <code>Dom::SparseMatrixF2</code> with <code>Dom::Matrix(Dom::IntegerMod(2))</code> .
MuPAD <code>userinfo</code>	Warns	<code>print</code>	Use <code>print</code> instead of <code>userinfo</code> .
MuPAD <code>setuserinfo</code>	Warns	<code>prog::trace</code> or <code>debug</code>	Try using <code>prog::trace</code> or <code>debug</code> instead of <code>setuserinfo</code> .
<code>poly</code>	Errors	<code>charpoly</code>	Replace all instances of <code>poly</code> with <code>charpoly</code> .
<code>sqrt</code> target of the MuPAD <code>simplify</code> function	Errors	MuPAD <code>radsimp</code> or <code>simplifyRadical</code>	Replace all instances of <code>simplify</code> function calls involving the <code>sqrt</code> target with <code>radsimp</code> or <code>simplifyRadical</code> . Alternatively, replace these calls with <code>simplify</code> function calls without targets.
<code>cos</code> , <code>sin</code> , <code>exp</code> , and <code>ln</code> targets of the MuPAD <code>simplify</code> function	Errors	MuPAD <code>simplify</code> without targets	Replace all instances of <code>simplify</code> function calls involving these targets with <code>simplify</code> function calls without targets. This can lead to a better simplification for some expressions.
MuPAD <code>transform::fourier</code>	Errors	MuPAD <code>fourier</code>	Replace all instances of <code>transform::fourier</code> with <code>fourier</code> .
MuPAD <code>transform::invfourier</code>	Errors	MuPAD <code>ifourier</code>	Replace all instances of <code>transform::invfourier</code> with <code>ifourier</code> .
MuPAD <code>transform::laplace</code>	Errors	MuPAD <code>laplace</code>	Replace all instances of <code>transform::laplace</code> with <code>laplace</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
MuPAD <code>transform::invlaplace</code>	Errors	MuPAD <code>ilaplace</code>	Replace all instances of <code>transform::invlaplace</code> with <code>ilaplace</code> .
MuPAD <code>transform::ztrans</code>	Errors	MuPAD <code>ztrans</code>	Replace all instances of <code>transform::ztrans</code> with <code>ztrans</code> .
MuPAD <code>transform::invztrans</code>	Errors	MuPAD <code>iztrans</code>	Replace all instances of <code>transform::invztrans</code> with <code>iztrans</code> .
MuPAD <code>transform::fourier</code>	Errors	MuPAD <code>fourier::addpattern</code>	Replace all instances of <code>transform::fourier::addpattern</code> with <code>fourier::addpattern</code> .
MuPAD <code>transform::invfourier</code>	Errors	MuPAD <code>ifourier::addpattern</code>	Replace all instances of <code>transform::invfourier::addpattern</code> with <code>ifourier::addpattern</code> .
MuPAD <code>transform::laplace</code>	Errors	MuPAD <code>laplace::addpattern</code>	Replace all instances of <code>transform::laplace::addpattern</code> with <code>laplace::addpattern</code> .
MuPAD <code>transform::invlaplace::addpattern</code>	Errors	MuPAD <code>ilaplace::addpattern</code>	Replace all instances of <code>transform::invlaplace::addpattern</code> with <code>ilaplace::addpattern</code> .
MuPAD <code>transform::ztrans::addpattern</code>	Errors	MuPAD <code>ztrans::addpattern</code>	Replace all instances of <code>transform::ztrans::addpattern</code> with <code>ztrans::addpattern</code> .
MuPAD <code>transform::invztrans::addpattern</code>	Errors	MuPAD <code>iztrans::addpattern</code>	Replace all instances of <code>transform::invztrans::addpattern</code> with <code>iztrans::addpattern</code> .
MuPAD <code>prog::calledFrom</code>	Errors	<code>context(hold(procname))</code>	Replace all instances of <code>prog::calledFrom()</code> with <code>context(hold(procname))</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
MuPAD <code>prog::calltree</code>	Errors	<code>prog::trace</code>	Use <code>prog::trace</code> instead of <code>prog::calltree</code> .
MuPAD <code>prog::error</code>	Errors	<code>getlasterror</code>	Use <code>getlasterror</code> instead of <code>prog::error</code> .
MuPAD <code>prog::memuse</code>	Errors	<code>prog::trace(Mem)</code> or <code>bytes()</code>	Use <code>prog::trace(Mem)</code> or <code>bytes()</code> instead of <code>prog::memuse</code> .
MuPAD <code>prog::testfunc</code>	Errors	<code>print(Unquoted, "...")</code>	Use <code>print(Unquoted, "...")</code> instead of <code>prog::testfunc</code> .
MuPAD <code>prog::testmethod</code>	Errors	<code>prog::test(..., Method = myTestMethod)</code>	Use <code>prog::test(..., Method = myTestMethod)</code> instead of <code>prog::testmethod</code> .
MuPAD <code>prog::testnum</code>	Errors	Nothing	No replacement
Dynamic modules for MuPAD, including the <code>module</code> , <code>external</code> , and <code>Pref::unloadableM</code> functions and all functions of the <code>module</code> library	Errors	Nothing	No replacement

R2012b

Version: 5.9

New Features

Bug Fixes

Compatibility Considerations

MATLAB symbolic matrix analysis functions for characteristic (`charpoly`) and minimal (`minpoly`) polynomials and for norm (`norm`) and condition (`cond`) number

`charpoly` computes the characteristic polynomial of a matrix.

`minpoly` computes the minimal polynomial of a matrix.

`norm` computes the 2-norm (default), 1-norm, Frobenius norm, and infinity norm of a symbolic matrix. It also computes the P-norm, Frobenius norm, infinity norm, and negative infinity norm of a symbolic vector.

`cond` computes the corresponding condition numbers of a matrix.

`poles` function for determining the poles of an expression

The MATLAB `poles` function determines the poles of a symbolic expression or function. The `poles` function is also implemented in MuPAD.

`vpasolve` function for solving equations and systems using variable precision arithmetic

The MATLAB `vpasolve` function solves equations and systems of equations numerically.

Functions for converting linear systems of equations to matrix form $AX=B$ (`equationsToMatrix`) and solving matrix equations (`linsolve`)

The MATLAB `equationsToMatrix` function converts a linear system of equations to the matrix form $AX = B$. The function returns the coefficient matrix A and the vector B that contains the right sides of the equations.

The MATLAB `linsolve` function solves linear systems of equations represented in the matrix form $AX = B$. The function also returns the reciprocal of the condition number of the square coefficient matrix A . If A is rectangular, `linsolve` returns the rank of A .

MATLAB symbolic functions for describing pulses: `rectangularPulse` and `triangularPulse`

`rectangularPulse` and `triangularPulse` compute the rectangular and triangular pulse functions, respectively.

In MuPAD, the new `rectangularPulse` and `triangularPulse` functions are equivalent to `rectpulse` and `tripulse`, respectively.

MuPAD functions for computing integral and Z-transforms

These new MuPAD functions compute integral and Z-transforms:

- `fourier` computes the Fourier transform. You can specify the parameters of the Fourier transform using the new `Pref::fourierParameters` function.
- `ifourier` computes the inverse Fourier transform. You can specify the parameters of the inverse Fourier transform using the new `Pref::fourierParameters` function.
- `laplace` computes the Laplace transform.
- `ilaplace` computes the inverse Laplace transform.
- `ztrans` computes the Z-transform.
- `iztrans` computes the inverse Z-transform.

MuPAD `Pref::fourierParameters` function for specifying Fourier parameters

The MuPAD `Pref::fourierParameters` function lets you specify parameters for Fourier and inverse Fourier transforms.

MuPAD functions for adding transform patterns

These new MuPAD functions add new patterns for integral and Z-transforms:

- `fourier::addpattern` adds new patterns for the Fourier transform.
- `ifourier::addpattern` adds new patterns for the inverse Fourier transform.
- `laplace::addpattern` adds new patterns for the Laplace transform.
- `ilaplace::addpattern` adds new patterns for the inverse Laplace transform.
- `ztrans::addpattern` adds new patterns for the Z-transform.

- `iztrans::addpattern` adds new patterns for the inverse Z-transform.

MuPAD does not save custom patterns permanently. The new patterns are available in the *current* MuPAD session only.

noFlatten option of the MuPAD proc function for preventing sequence flattening

The MuPAD proc function accepts the new `noFlatten` option. This option prevents flattening of sequences passed as arguments of the procedure.

testtype uses testtypeDom slot for overloading by the second argument

If in the call `testtype(object, T)` the argument `T` is a domain, then the method `testtypeDom` of `T` is called with the arguments `object, T`. If `T` is not a domain, then the method `testtypeDom` of `T::dom` is called with the arguments `object, T`.

Compatibility Considerations

In previous releases, `testtype` used the `testtype` slot for overloading by the second argument.

New upper limit on the number of digits in double

By default, the working precision for `double` is now limited to at most by 664 digits. You can explicitly specify a larger precision using `digits`.

Compatibility Considerations

Some results returned by `double` can differ from previous releases. For example, in previous releases `double` approximated the expression

```
x = sym('400!*((exp(2000)+1)/(exp(2000) - 1) - 1)')
```

by 3.2997. Now it approximates this expression by 0.

To get the same result as in previous releases, increase the precision of computations:

```
digits(1000)
double(x)
```

```
ans =
  3.2997
```

New definition for `real` and `imag`

Starting in R2012a, `real` and `imag` are no longer defined via `conj`. They use the MuPAD `Re` and `Im` functions instead.

Compatibility Considerations

In R2011b and earlier, `real` and `imag` are defined via the `conj` function:

```
syms z
real(z)
imag(z)

ans =
z/2 + conj(z)/2

ans =
- (z*i)/2 + (conj(z)*i)/2
```

Therefore, `real` and `imag` can return results in a different form. Results returned by `real` and `imag` now are mathematically equivalent to the results returned in previous releases.

Functionality being removed or changed

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
Old syntax of <code>taylor</code>	Errors	New calling syntax	Update all instances of <code>taylor</code> function calls using the new syntax.
<code>char(A,d)</code>	Errors	<code>char(A)</code>	Replace all instances of <code>char(A,d)</code> with <code>char(A)</code> .
<code>poly</code>	Warns	<code>charpoly</code>	Replace all instances of <code>poly</code> with <code>charpoly</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
<code>emlBlock</code>	Warns	<code>matlabFunctionBlock</code>	Replace all instances of <code>emlBlock</code> with <code>matlabFunctionBlock</code> .
Ability to create links from MuPAD notebooks to MuPAD documentation pages	Not available	Nothing	No replacement
<code>openmuphlp</code>	Errors	Nothing	No replacement
MuPAD Help Browser	Not available	Documentation Center	MuPAD documentation is now available in Documentation Center.
MuPAD Editor	Not available	MATLAB Editor	Open and edit MuPAD program files (<code>.mu</code> files) in the MATLAB Editor. The MATLAB Editor supports syntax highlighting and smart indenting for these files.
<code>psi(k0:k1,X)</code>	Errors	<code>psi(k,X)</code> , where <code>k</code> is a scalar specifying the <code>k</code> th derivative of <code>psi</code> at the elements of <code>X</code> .	Replace all instances of <code>psi(k0:k1,X)</code> with <code>psi(k,X)</code> , where <code>k</code> is a scalar. To modify your code, loop through the values <code>k0:k1</code> . For example: <pre>for k = k0:k1 Y(:,k) = psi(k,X); end</pre> In a future release, <code>size(Y)</code> will be <code>size(X)</code> . Modify any code that depends on <code>size(Y)</code> .
<code>diff</code> and <code>int</code> methods for inputs of the <code>char</code> type	Errors	<code>sym</code>	Use the <code>sym</code> method instead.

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
<code>sqrt</code> target of the MuPAD <code>simplify</code> function	Errors	MuPAD <code>radsimp</code> or <code>simplifyRadical</code>	Replace all instances of <code>simplify</code> function calls involving the <code>sqrt</code> target with <code>radsimp</code> or <code>simplifyRadical</code> . Alternatively, replace these calls with <code>simplify</code> function calls without targets.
<code>cos</code> , <code>sin</code> , <code>exp</code> , and <code>ln</code> targets of the MuPAD <code>simplify</code> function	Errors	MuPAD <code>simplify</code> without targets	Replace all instances of <code>simplify</code> function calls involving these targets with <code>simplify</code> function calls without targets. This can lead to a better simplification for some expressions.
MuPAD <code>transform::fourier</code>	Warns	MuPAD <code>fourier</code>	Replace all instances of <code>transform::fourier</code> with <code>fourier</code> .
MuPAD <code>transform::invfourier</code>	Warns	MuPAD <code>ifourier</code>	Replace all instances of <code>transform::invfourier</code> with <code>ifourier</code> .
MuPAD <code>transform::laplace</code>	Warns	MuPAD <code>laplace</code>	Replace all instances of <code>transform::laplace</code> with <code>laplace</code> .
MuPAD <code>transform::invlaplace</code>	Warns	MuPAD <code>ilaplace</code>	Replace all instances of <code>transform::invlaplace</code> with <code>ilaplace</code> .
MuPAD <code>transform::ztrans</code>	Warns	MuPAD <code>ztrans</code>	Replace all instances of <code>transform::ztrans</code> with <code>ztrans</code> .
MuPAD <code>transform::invztrans</code>	Warns	MuPAD <code>iztrans</code>	Replace all instances of <code>transform::invztrans</code> with <code>iztrans</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
MuPAD <code>transform::fourier</code>	Warns	MuPAD <code>fourier::addpattern</code>	Replace all instances of <code>transform::fourier::addpattern</code> with <code>fourier::addpattern</code> .
MuPAD <code>transform::invfourier</code>	Warns	MuPAD <code>ifourier::addpattern</code>	Replace all instances of <code>transform::invfourier::addpattern</code> with <code>ifourier::addpattern</code> .
MuPAD <code>transform::laplace</code>	Warns	MuPAD <code>laplace::addpattern</code>	Replace all instances of <code>transform::laplace::addpattern</code> with <code>laplace::addpattern</code> .
MuPAD <code>transform::invlaplace</code>	Warns	MuPAD <code>ilaplace::addpattern</code>	Replace all instances of <code>transform::invlaplace::addpattern</code> with <code>ilaplace::addpattern</code> .
MuPAD <code>transform::ztrans</code>	Warns	MuPAD <code>ztrans::addpattern</code>	Replace all instances of <code>transform::ztrans::addpattern</code> with <code>ztrans::addpattern</code> .
MuPAD <code>transform::invztrans</code>	Warns	MuPAD <code>iztrans::addpattern</code>	Replace all instances of <code>transform::invztrans::addpattern</code> with <code>iztrans::addpattern</code> .
MuPAD <code>prog::calledFrom</code>	Warns	<code>context(hold(procname))</code>	Replace all instances of <code>prog::calledFrom()</code> with <code>context(hold(procname))</code> .
MuPAD <code>prog::calltree</code>	Warns	<code>prog::trace</code>	Use <code>prog::trace</code> instead of <code>prog::calltree</code> .
MuPAD <code>prog::error</code>	Warns	<code>getlasterror</code>	Use <code>getlasterror</code> instead of <code>prog::error</code> .
MuPAD <code>prog::memuse</code>	Warns	<code>prog::trace(Mem)</code> or <code>bytes()</code>	Use <code>prog::trace(Mem)</code> or <code>bytes()</code> instead of <code>prog::memuse</code> .
MuPAD <code>prog::testfunc</code>	Warns	<code>print(Unquoted, "...")</code>	Use <code>print(Unquoted, "...")</code> instead of <code>prog::testfunc</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
MuPAD <code>prog::testmethod</code>	Warns	<code>prog::test(..., Method = myTestMethod)</code>	Use <code>prog::test(..., Method = myTestMethod)</code> instead of <code>prog::testmethod</code> .
MuPAD <code>prog::testnum</code>	Warns	Nothing	No replacement
Dynamic modules for MuPAD, including the <code>module</code> , <code>external</code> , and <code>Pref::unloadableModule</code> functions and all functions of the <code>module</code> library	Warns	Nothing	No replacement

R2012a

Version: 5.8

New Features

Bug Fixes

Compatibility Considerations

New Special Functions

The following special functions are available:

- `airy` computes the Airy functions of the first and the second kinds. It also computes the first derivatives of the Airy functions.
- `beta` computes the beta function.
- `erfinv` and `erfcinv` compute the inverse and inverse complementary error functions.
- `factorial` computes the factorial function.
- `nchoosek` computes binomial coefficients.
- `whittakerM` and `whittakerW` compute the Whittaker M and Whittaker W functions.

New Vector Analysis Functions

The following vector analysis functions are available:

- `curl` computes the curl of a vector field.
- `divergence` computes the divergence of a vector field.
- `laplacian` computes the laplacian of a scalar function.
- `potential` computes the scalar potential of a vector field.
- `vectorPotential` computes the vector potential of a three-dimensional vector field.

Computations with Symbolic Functions

The toolbox lets you create symbolic functions. For details, see [Creating Symbolic Functions](#).

`dsolve`, `ezplot`, the new `odeToVectorField` function, and other Symbolic Math Toolbox™ functions now support computations with symbolic functions.

The toolbox also provides the following functions to support common operations on symbolic functions:

- `argnames` returns a symbolic array of all input variables of a symbolic function.
- `formula` returns a mathematical expression that defines the symbolic function.

Assumptions on Variables

You can set assumptions on symbolic variables by using these functions:

- `assume` sets assumptions on symbolic variables.
- `assumeAlso` adds assumptions on symbolic variables without erasing the previous assumptions.
- `assumptions` shows assumptions set on symbolic variables.

New Relational Operators Create Equations, Inequalities, and Relations

Use these relational operators to create symbolic equations, inequalities, and relations:

- `==` and its functional form `eq` create a symbolic equation. You can solve these equations using `solve` or `dsolve`, plot them using `ezplot`, set assumptions using `assume` or `assumeAlso`, or use them in logical expressions.
- `~=` and its functional form `ne` create a symbolic inequality. You can use inequalities in assumptions and logical expressions.
- `>`, `>=`, `<`, `<=`, and their functional forms `ge`, `gt`, `le`, and `lt` create symbolic relations. You can use relations in assumptions and logical expressions.

Compatibility Considerations

In previous releases, `eq` evaluated equations and returned logical 1 or 0. Now it returns unevaluated equations letting you create equations that you can pass to `solve`, `assume`, and other functions. To obtain the same results as in previous releases, wrap equations in `logical` or `isAlways`. For example, use `logical(A == B)`.

New Logical Operators Create Logical Expressions

Use these logical operations let you create logical expressions with symbolic subexpressions:

- `&` or its functional form `and` defines the logical conjunction (the logical AND) for symbolic expressions.
- `|` or its functional form `or` defines the logical disjunction (the logical OR) for symbolic expressions.

- `~` or its functional form `not` defines the logical negation (the logical NOT) for symbolic expressions.
- `xor` defines the logical exclusive disjunction (the logical XOR) for symbolic expressions.

If logical expressions are elements of a symbolic array, you can use these new functions to test the logical expressions:

- `all` tests whether all equations and inequalities represented as elements of a symbolic array are valid.
- `any` tests whether at least one of equations and inequalities represented as elements of a symbolic array is valid.

New Functions Test Validity of Symbolic Equations, Inequalities, and Relations

Use these functions to test symbolic equations, inequalities, and relations, including logical statements:

- `isAlways` checks whether an equation, inequality, or relation holds for all values of its variables.
- `logical` checks the validity of an equation, inequality, or relation. This function does not simplify or mathematically transform expressions that form an equation, inequality, or relation. It also typically ignores assumptions on variables.

New Functions Manipulate Symbolic Expressions

These functions provide more flexible options for manipulating symbolic expressions:

- The `rewrite` function rewrites expressions in terms of target functions. It returns a mathematically equivalent form of an expression using the specified target functions. For example, it can rewrite trigonometric expressions using the exponential function.
- `children` returns child subexpressions, or terms, of a symbolic expression.

New `odeToVectorField` Function Converts Higher-Order Differential Equations to Systems of First-Order Differential Equations

`odeToVectorField` converts second- and higher-order differential equations to systems of first-order differential equations. It returns a symbolic vector representing the resulting

system of first-order differential equations. With `matlabFunction` you can generate a MATLAB function from this vector, and then use it as an input for the MATLAB numerical solvers `ode23` and `ode45`.

In MuPAD, the new `numeric::odeToVectorField` function is equivalent to `numeric::ode2vectorfield`.

New Calling Syntax for the `taylor` Function

The `taylor` function that computes the Taylor series expansions has a new syntax and set of options.

Compatibility Considerations

The new syntax is not valid before Version 5.8. The old syntax is still supported, but will be removed in a future release. To update existing code that relies on the old syntax, make the following changes to the `taylor` function calls:

- Specify the truncation order using the name-value pair argument `Order`.
- Specify the expansion point using the name-value pair argument `ExpansionPoint`.

Alternatively, specify the expansion point as a third input argument. In this case, you must also specify the independent variable or the vector of variables as the second input argument.

For details and examples, see `taylor`.

New MuPAD Functions Compute Rectangular and Triangular Pulse Functions

The MuPAD `rectpulse` and `tripulse` functions compute the rectangular and triangular pulse functions, respectively.

MuPAD `det`, `linalg::det`, `inverse`, `linsolve`, and `linalg::matlinsolve` Functions Accept the New `Normal` Option

The MuPAD `det`, `linalg::det`, `inverse`, `linsolve`, and `linalg::matlinsolve` functions accept the new `Normal` option that guarantees normalization of the

returned results. The `_invert` methods of the MuPAD `Dom::Matrix(R)` and `Dom::DenseMatrix(R)` domains also accept `Normal`.

MuPAD `linalg::matlinsolve` Function Accepts the New `ShowAssumptions` Option

The MuPAD `linalg::matlinsolve` function accepts the new `ShowAssumptions` option. This option lets you see internal assumptions on symbolic parameters that `linalg::matlinsolve` makes while solving a system of equations.

Enhanced MuPAD `pdivide` Function

Enhanced MuPAD `pdivide` function now performs pseudo-division of multivariate polynomials.

Improved MuPAD `prog::remember` Function

Improved MuPAD `prog::remember` function, which lets you use the `remember` mechanism in procedures streamlines such processes as debugging, profiling, and argument checking.

Functionality Being Removed or Changed

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
Old syntax of <code>taylor</code>	Warns	New syntax	Update all instances of <code>taylor</code> function calls using the new syntax.
Default number of simplification steps in <code>simplify</code> has changed from 50 to 100.	Uses the new default setting	<code>simplify(S, 'Steps', 50)</code>	To terminate algebraic simplification after 50 steps, call <code>simplify</code> with the name-value pair argument <code>'Steps', 50</code> .
<code>char(A, d)</code>	Warns	<code>char(A)</code>	Replace all instances of <code>char(A, d)</code> with <code>char(A)</code> .

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
<code>emlBlock</code>	Warns	<code>matlabFunctionBlock</code>	Replace all instances of <code>emlBlock</code> with <code>matlabFunctionBlock</code> .
<code>psi(k0:k1,X)</code>	Warns	<code>psi(k,X)</code> where <code>k</code> is a scalar specifying the <code>k</code> th derivative of <code>psi</code> at the elements of <code>X</code> .	<p>Replace all instances of <code>psi(k0:k1,X)</code> with <code>psi(k,X)</code>, where <code>k</code> is a scalar. To modify your code, loop through the values <code>k0:k1</code>. For example:</p> <pre>for k = k0:k1 Y(:,k) = psi(k,X); end</pre> <p>In the future, <code>size(Y)</code> will be <code>size(X)</code>. Modify any code that depends on <code>size(Y)</code>.</p>
<code>sqrt</code> target of the MuPAD <code>simplify</code> function	Warns	MuPAD <code>radsimp</code> or <code>simplifyRadical</code>	Replace all instances of <code>simplify</code> function calls involving the <code>sqrt</code> target with <code>radsimp</code> or <code>simplifyRadical</code> . Alternatively, replace these calls with <code>simplify</code> function calls without targets.
<code>cos</code> , <code>sin</code> , <code>exp</code> , and <code>ln</code> targets of the MuPAD <code>simplify</code> function	Warns	MuPAD <code>simplify</code> without targets	Replace all instances of <code>simplify</code> function calls involving these targets with <code>simplify</code> function calls without targets. This can lead to a better simplification for some expressions.
MuPAD frame function	Errors	Nothing	No replacement

R2011b

Version: 5.7

New Features

Bug Fixes

Compatibility Considerations

MATLAB Editor Now Supports MuPAD Program Files

You can open and edit MuPAD program files (.mu files) in the MATLAB Editor. MATLAB Editor supports syntax highlighting and smart indenting for these files.

dsolve, expand, int, simple, simplify, and solve Accept More Options

dsolve now accepts the IgnoreAnalyticConstraints and MaxDegree options.

expand now accepts the ArithmeticOnly and IgnoreAnalyticConstraints options.

int now accepts the IgnoreAnalyticConstraints, IgnoreSpecialCases, and PrincipalValue options.

simple now accepts the IgnoreAnalyticConstraints option.

simplify now accepts the IgnoreAnalyticConstraints, Seconds, and Steps options.

solve now accepts the IgnoreAnalyticConstraints, IgnoreProperties, MaxDegree, PrincipalValue, and Real options.

New read Function Reads MuPAD Program Files in MATLAB

read simplifies using your own MuPAD procedures in MATLAB. See Before Calling a Procedure for details.

New symprod Function Computes Products of Series

symprod computes definite and indefinite products of symbolic series.

New hessian Function Computes Hessian Matrices

hessian computes the Hessian matrix of a scalar function.

New gradient Function Computes Vector Gradients

gradient computes the vector gradient of a scalar function in Cartesian coordinates. In MuPAD, the new linalg::gradient function is equivalent to linalg::grad.

New erfc Function Computes the Complementary Error Function

`erfc` computes the complementary error function.

New psi Function Computes the Digamma and Polygamma Functions

`psi` computes the digamma and polygamma functions.

New wrightOmega Function Computes the Wright omega Function

`wrightOmega` computes the Wright omega function.

New simplifyFraction Function Simplifies Expressions

`simplifyFraction` returns a simplified form of a fraction where both numerator and denominator are polynomials and their greatest common divisor is 1. In MuPAD, the new `simplifyFraction` function is equivalent to `normal`.

New MuPAD simplifyRadical Function Simplifies Radicals in Arithmetical Expressions

The new MuPAD `simplifyRadical` function is equivalent to the MuPAD `radsimp` function.

pretty Function Now Uses Abbreviations in Long Output Expressions for Better Readability

`pretty` uses abbreviations when presenting symbolic results in the MATLAB Command Window. This new format of presenting symbolic results enhances readability of long output expressions.

MuPAD normal Function Accepts the New Expand Option

The MuPAD `normal` function accepts the new `Expand` option that determines whether numerators and denominators of fractions are expanded.

Compatibility Considerations

In previous releases, `normal` returned a fraction with the expanded numerator and denominator by default. Now the default setting is that `normal` can return factored expressions in numerators and denominators. In explicit calls to `normal`, you can use the `Expand` option to get the same behavior as in previous releases.

If a function calls `normal` internally, then that function can return its results in a different form. These new results are mathematically equivalent to the results that you get in previous releases. Many MuPAD library functions can call `normal`.

Modified MuPAD groebner Library

All functions of the MuPAD `groebner` library now can accept and return polynomials with arbitrary arithmetical expressions.

MuPAD `groebner::gbasis` Function Accepts the New `Factor` and `IgnoreSpecialCases` Options

With the `Factor` option, `groebner::gbasis` returns a set of lists, such that:

- Each list is the Groebner basis of an ideal.
- The union of these ideals is a superset of the ideal given as input, and a subset of the radical of that ideal.

With the `IgnoreSpecialCases` option, `groebner::gbasis` handles all coefficients in all intermediate results as nonzero unless these coefficients are equal to 0 for all parameter values.

New MuPAD Functions for Computing Logarithms

The new MuPAD `log2` and `log10` functions compute logarithms to the bases 2 and 10, respectively. Also, in MuPAD `log(x)` is now an alias for `ln(x)`.

Functionality Being Removed or Changed

Functionality	What Happens When You Use It?	Use This Instead	Compatibility Considerations
<code>emlBlock</code>	Warns	<code>matlabFunctionBlock</code>	Replace all instances of <code>emlBlock</code> with <code>matlabFunctionBlock</code> .
Real and IgnoreProperties options in MuPAD <code>ode::solve</code>	Warns	<code>IgnoreSpecialCases</code> or <code>IgnoreAnalyticConstraints</code>	Try using <code>IgnoreSpecialCases</code> or <code>IgnoreAnalyticConstraints</code> instead.

R2011a

Version: 5.6

New Features

Bug Fixes

Compatibility Considerations

Expression Wrapping of Math Output in the MuPAD Notebook Interface

The new default format of presenting results enhances readability by wrapping long output expressions, including long numbers, fractions and matrices.

Symbolic Solver Handles More Non-Algebraic Equations

The enhanced `rationalize` function in MuPAD helps the symbolic solver to handle more systems of non-algebraic equations. In particular, this improvement enables the toolbox to solve more systems of trigonometric equations.

Improved Performance in the Ordinary Differential Equation Solver

The ordinary differential equation solver demonstrates better performance.

Improved Performance for Polynomial Arithmetic Operations

The MuPAD functions `gcdex`, `partfrac`, `polylib::resultant`, and `solveLib::pdioe` now demonstrate better performance.

New MuPAD `polylib::subresultant` Function Computes Subresultants of Polynomials

`polylib::subresultant` computes subresultants of two polynomials or polynomial expressions.

MuPAD `partfrac` Function Accepts the New List Option

With the new `List` option, `partfrac` returns a list consisting of the numerators and denominators of the partial fraction decomposition.

New MuPAD `inverf` and `inverfc` Functions Compute the Inverses of Error Functions

The `inverf` function computes the inverse of the error function.

The `inverfc` function computes the inverse of the complementary error function.

New MuPAD `numlib::checkPrimalityCertificate` Function Tests Primality Certificates

`numlib::checkPrimalityCertificate` tests primality certificates returned by `numlib::proveprime`. For information about proving primality of numbers, see “Proving Primality” in the MuPAD documentation.

New Demos

There are three new demos that show how to solve equations and compute derivatives and integrals:

- Solving Algebraic and Differential Equations
- Differentiation
- Integration

To run the new demos, enter `symeqndemo`, `syndiffdemo`, or `symintdemo` in the MATLAB Command Window.

Functionality Being Removed or Changed

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
MuPAD <code>matchlib::analyze</code>	Errors	MuPAD <code>prog::exptree</code>	To visualize expressions, use <code>prog::exptree</code> .
MuPAD <code>prog::testcall</code>	Errors	Nothing	No replacement
MuPAD <code>prog::testerrors</code>	Errors	Nothing	No replacement
Old syntax of MuPAD <code>prog::getOptions</code>	Errors	The new syntax	Update all instances of <code>prog::getOptions</code> calls using the new syntax.

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
Old syntax of MuPAD <code>prog::trace</code>	Errors	The new syntax	Update all instances of <code>prog::trace</code> calls using the new syntax.

R2010b

Version: 5.5

New Features

Bug Fixes

Compatibility Considerations

sym Function Creates Matrices of Symbolic Variables

The `sym` function now provides a shortcut for creating vectors and matrices of symbolic variables.

For more information, see [Creating a Matrix of Symbolic Variables](#).

generate::Simscape Function Generates Simscape Equations from MuPAD Expressions

The new MuPAD function `generate::Simscape` converts MuPAD expressions to Simscape™ equations.

MuPAD Code Generation Functions Accept the New NoWarning Option

MuPAD functions `generate::C`, `generate::fortran`, `generate::MATLAB`, and `generate::Simscape` accept the new `NoWarning` option. The option suppresses all warnings issued by these functions.

Improved MuPAD Hyperlink Dialog Box

Creating and editing links in MuPAD has become easier with the improved Hyperlink dialog box.

MuPAD Notebook Highlights Matched and Unmatched Delimiters

MuPAD Notebook now can notify you about matched and unmatched delimiters such as parentheses, brackets, and braces.

Improved Performance When Solving Linear Systems in a Matrix Form

MuPAD `linalg::matlinsolve` function, which solves linear systems of equations in a matrix form, demonstrates better performance.

MuPAD Solver for Ordinary Differential Equations Handles More Equation Types

Enhanced MuPAD solver handles more first-order nonlinear and third-order linear ordinary differential equations. The solver demonstrates improved performance.

New Syntax for the MuPAD `prog::getOptions` Function

The `prog::getOptions` function that collects and verifies options within a procedure has the new syntax.

Compatibility Considerations

The new syntax is not valid in MuPAD versions earlier than 5.5. The old syntax is supported in MuPAD 5.5, but will be removed in a future release.

New Syntax for the MuPAD `prog::trace` Function

The `prog::trace` function used for debugging has the new syntax. The function observes entering and exiting the MuPAD functions.

Compatibility Considerations

The new syntax is not valid in MuPAD versions earlier than 5.5. The old syntax is not supported in MuPAD 5.5.

Improved Interface for Arithmetical Operations on Polynomials

Improved interface for arithmetical operations between polynomials and arithmetical expressions. In previous releases, to perform an arithmetical operation on a polynomial and an arithmetical expression, you must explicitly convert that expression to a polynomial of the corresponding type. Now, when you operate on a polynomial and an arithmetical expression, MuPAD internally converts the arithmetical expression to a polynomial and performs the calculation.

MuPAD `igcd` Function Now Accepts Complex Numbers as Arguments

The MuPAD `igcd` function, which computes the greatest common divisor of integers, now accepts complex numbers. Both real and imaginary parts of accepted complex numbers must be integers or arithmetic expressions that represent integers.

Enhanced Solver For Factorable Polynomial Systems

The MuPAD `solve` function performs better on factorable polynomial systems.

MuPAD Now Evaluates Large Sums with Subtractions Faster

MuPAD performs evaluations of large sums that contain subtractions faster than in previous releases.

Compatibility Considerations

In MuPAD, the difference operator `(-)` no longer invokes the `_subtract` function. Instead, it invokes the `_plus` and `_negate` functions. For example, `a - b` is equivalent to `_plus(a, _negate(b))`.

MuPAD `freeIndets` Function Accepts the New `All` Option

The `freeIndets` function accepts the new `All` option. With this option, `freeIndets` does not exclude the 0th operand from the list of free identifiers.

Functionality Being Removed or Changed

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
<code>diff</code> and <code>int</code> methods for inputs of the <code>char</code> type	Warns	<code>sym</code>	Use the <code>sym</code> method instead.
MuPAD <code>matchlib::analyze</code>	Warns	MuPAD <code>prog::exptree</code>	To visualize expressions, use <code>prog::exptree</code> .
MuPAD <code>prog::testcall</code>	Warns	None	No replacement
MuPAD <code>prog::testerrors</code>	Warns	None	No replacement
The following options in MuPAD <code>prog::trace</code> : <ul style="list-style-type: none"><code>All</code><code>Backup</code>	Errors	None	No replacement. These options are not supported in the current release.

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
<ul style="list-style-type: none">• Force• Name• Proc• Plain• Width			
Global properties in MuPAD	Errors	Assumptions on each variable	Make assumptions on each variable instead.

R2010a

Version: 5.4

New Features

Bug Fixes

Compatibility Considerations

When Opening Notebook, MuPAD Can Jump to Particular Locations

The `mupad` command that opens a MuPAD notebook now supports references to particular places inside a notebook. You can create a link target inside a notebook and refer to it when opening a notebook.

`simscapeEquation` Function Generates Simscape Equations from Symbolic Expressions

The new `simscapeEquation` command represents symbolic expressions in the form of Simscape equations. For more information, see [Generating Simscape Equations in the Symbolic Math Toolbox documentation](#).

New Calling Syntax for the `sort` Function

The `sort` function that sorts the element of symbolic arrays and polynomials has the new syntax and set of options.

Compatibility Considerations

In previous releases, the `sort` function flattened symbolic matrices to vectors before sorting the elements. Now the `sort` function sorts the elements of each column or each row of a symbolic matrix. If you want to obtain the same results as in the previous release, flatten the symbolic matrix before sorting it: `sort(A(:))`.

Changes in the `symengine` Function

The toolbox no longer supports the ability to choose an alternative symbolic engine.

64-Bit GUI Support for Macintosh

MuPAD now supports 64-bit graphical user interfaces (such as notebooks and Editor and Debugger windows) for a 64-bit Macintosh operating system.

New MuPAD Print Preview Dialog

Adjusting MuPAD documents for printing is easier with the new Print Preview dialog. You can view one or several pages, zoom in and out, switch between page orientations,

adjust the page settings without closing the dialog, and print the page or save it to PDF format

Improved Configure MuPAD Dialog Box

Specifying the default settings for graphical user interfaces, such as notebooks and Editor and Debugger windows, has become easier with the improved configuration dialog box.

MuPAD Support for Basic Arithmetic Operations for Lists

Basic arithmetic operations now work for lists.

Improved Performance When Operating on Matrices with Symbolic Elements

MuPAD demonstrates better performance when handling some linear algebra operations on matrices containing symbolic elements.

Enhanced MuPAD divide Function

Enhanced MuPAD `divide` function computes the quotient and remainder for division of multivariate polynomials.

Improved Performance for Operations on Polynomials

Improved performance for conversions involving polynomials. Improved performance for operations on polynomials including evaluation, multiplication, and division.

Compatibility Considerations

If the coefficients of a polynomial contain the variables of the polynomial itself, the form of results returned by the MuPAD `poly` function can differ from previous releases. In previous releases, the `poly` function converted such coefficients to monomials. Now the `poly` function can return the coefficients of the original expression as coefficients in the resulting polynomial. To get the same behavior as in previous releases, use `expr` to convert an original polynomial into an expression, and then call the `poly` function. For example, the following call exercises the old behavior: `poly(expr(p), [y, x])`.

MuPAD coeff Function Accepts the New All Option

The `coeff` function accepts the `newAll` option. With this option, `coeff` returns all coefficients of a polynomial including those equal to 0.

MuPAD expand Function Accepts the New ArithmeticOnly Option

The `expand` function accepts the new `ArithmeticOnly` option. The option allows you to expand a sum without expanding trigonometric expressions and special functions in its terms. Technically, the option omits overloading the `expand` function for each term of the original expression.

MuPAD expand Function Now Expands Powers of Products

The `expand` function now expands powers of products such as $(xy)^n$ for positive x and y . When called with the `IgnoreAnalyticConstraints` option, the function expands the power of products for arbitrary terms.

New Calling Syntax for MuPAD rationalize Function

The `rationalize` function that transforms an arbitrary expression into a rational expression has the new syntax and set of options.

Compatibility Considerations

The new syntax is not valid in MuPAD versions earlier than 5.4. The old syntax is supported in MuPAD 5.4, but will be removed in a future release.

Enhanced MuPAD simplify and Simplify Functions

Enhanced simplification functions, `simplify` and `Simplify`, demonstrate better results for expressions involving trigonometric and hyperbolic functions, square roots, and sums over roots of unity.

MuPAD subs Function Accepts the New EvalChanges Option

The `subs` function now accepts the new `EvalChanges` option. By default, `subs` does not evaluate an expression after making substitutions. With this option, `subs` evaluates all subexpressions that contain substitutions.

MuPAD Solver for Ordinary Differential Equations Handles More Equation Types

Enhanced MuPAD solver handles more second-order linear and first-order nonlinear ordinary differential equations. The solver demonstrates improved performance.

Functionality Being Removed or Changed

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
MuPAD Domain <code>Dom::Ideal</code>	Errors	<code>groebner</code>	Represent ideals as lists, and use functions of the <code>groebner</code> package instead.
MuPAD student library	Errors	<code>plot::Integral</code> and <code>linalg</code>	Use <code>plot::Integral</code> and the <code>linalg</code> package instead.
MuPAD relation option in <code>simplify</code>	Errors	None	No replacement
Global property	Warns	Assumptions on each variable	Make assumptions on each variable instead.
<code>digits</code> and <code>vpa</code> do not let you set the number of digits to 1.	Errors	Errors	It is no longer possible to set the number of digits to 1 when using the <code>digits</code> and <code>vpa</code> functions. The Symbolic Math Toolbox software version number 4.9 and lower allowed you to set the number of digits to 1.

R2009b

Version: 5.3

New Features

Bug Fixes

Compatibility Considerations

Support for Windows x64 and 64-Bit Macintosh

The toolbox now supports 64-bit Windows® and Macintosh operating systems. If you work in the MuPAD Notebook Interface on a 64-bit Macintosh operating system, MuPAD runs a 64-bit engine with 32-bit graphical user interfaces, such as notebooks and Editor and Debugger windows.

sym and syms Use Reserved Words as Variable Names

sym and syms commands now treat reserved MuPAD words, except pi, as variable names.

Compatibility Considerations

In previous releases, the reserved words returned MuPAD values. If your code uses the reserved words as MuPAD commands, modify your code and use the evalin command with the reserved word as a name. For example, use evalin(symengine, 'beta').

Toolbox Now Displays Floating-Point Results with Their Original Precision

The toolbox now displays the floating-point results with the original precision with which the toolbox returned them.

Compatibility Considerations

In previous releases, the toolbox displayed floating-point results with the current precision. You must update the existing code that relies on the output precision for displaying floating-point numbers. Use digits to set the precision you need before computing such results. The toolbox displays the results with the same number of digits it used to compute the results. The toolbox also can increase the specified precision of calculations by several digits.

In previous releases, sym(A, 'f') represented numbers in the form $(2^e + N \cdot 2^{(e - 52)})$ or $-(2^e + N \cdot 2^{(e - 52)})$, with integers for N and e, and $N \neq 0$. Now sym(A, 'f') displays results in the rational form that actually represents the double-precision floating-point numbers.

New MuPAD Preference `Pref::outputDigits` Controls Floating-Point Outputs

New preference `Pref::outputDigits` controls the precision MuPAD uses to display floating-point results.

Solver for Ordinary Differential Equations Handles More Equation Types

Enhanced solvers handle more equation types of second-order homogeneous linear ordinary differential equations. The solver demonstrates improved performance.

MuPAD `limit` Function Supports Limits for Incomplete Gamma Function and Exponential Integral Function

Enhanced limit function now can compute limits for incomplete Gamma function and exponential integral function.

Enhanced Simplification Routines for MuPAD Special Functions

Enhanced simplification routines for MuPAD `hypergeom`, `mejerG`, and `bessel` special functions.

Enhanced MuPAD `combine` Function for Logarithms

Enhanced `combine` function demonstrates better performance for logarithms.

MuPAD `normal` Function Accepts New Options

The `normal` command now accepts the options `NoGcd`, `ToCancel`, `Rationalize`, `Recursive`, and `Iterations`. The options control costly operations, such as recognizing greatest common divisors and algebraic dependencies.

Functionality Being Removed or Changed

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
MuPAD Domain <code>Dom::Ideal</code>	Warns	<code>groebner</code>	Represent ideals as lists, and use

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
			functions of the <code>groebner</code> package instead.
MuPAD student library	Warns	<code>plot::Integral</code> and <code>linalg</code>	Use <code>plot::Integral</code> and the <code>linalg</code> package instead.
<code>d</code> in <code>char(A, d)</code>	Warns	None	No replacement
MuPAD relation option in <code>simplify</code>	Warns	None	No replacement

R2009a

Version: 5.2

New Features

Bug Fixes

Compatibility Considerations

dsolve Accepts the New Option IgnoreAnalyticConstraints

The `dsolve` command now accepts the option `IgnoreAnalyticConstraints`. The option controls the level of mathematical rigor that the solver uses on the analytical constraints on the solution. By default, the solver ignores all analytical constraints.

Compatibility Considerations

The results of the `dsolve` command can differ from those returned in the previous release. If you want to obtain the same solutions as in the previous release, set the value of the option `IgnoreAnalyticConstraints` to `none`.

emlBlock Function Generates Embedded MATLAB Function Blocks from Symbolic Objects

The new `emlBlock` command converts symbolic expressions to Embedded MATLAB[®] Function Blocks. You can use these blocks in any Simulink[®] installation, even those without a Symbolic Math Toolbox license. For more information, see [Generating Embedded MATLAB Blocks in the Symbolic Math Toolbox documentation](#).

matlabFunction Improves Control over Input and Output Parameters

`matlabFunction` now accepts multiple expressions and cell arrays of symbolic arrays as input parameters. The function now allows you to specify the names of the output parameters.

Compatibility Considerations

In previous releases, the default name of an output variable was `RESULT`. Now the default names of the output variables coincide with the names you use to call `matlabFunction`. You must update existing code that relies on the default output name `RESULT`. You can change your code using any of these methods:

- Define the name of an output variable as `RESULT`.
- Change the name of an input variable to `RESULT`.
- Throughout your code change the variable name from `RESULT` to the input name.

Enhancements to Object-Oriented Programming Capabilities

The Symbolic Math Toolbox product uses some object-oriented programming features to implement symbolic objects. Major enhancements to object-oriented programming capabilities enable easier development and maintenance of large applications and data structures. For a full description of object-oriented features, see the MATLAB Object-Oriented Programming documentation.

Compatibility Considerations

It is no longer possible to add methods to `@sym` by creating a `@sym` directory containing custom methods.

For an empty `x`, `sym(x)` returns a symbolic object of the same size as `x`. In previous releases, `sym(x)` returned a symbolic object of size 0-by-0 for an empty `x`.

generate::MATLAB Function Converts MuPAD Expressions to MATLAB Code

The new `generate::MATLAB` command converts MuPAD expressions, equations, and matrices to MATLAB formatted strings.

MuPAD IgnoreAnalyticConstraints Option Specifies That Core Functions Apply Common Algebraic Assumptions to Simplify Results

The new `IgnoreAnalyticConstraints` option allows the use of a set of simplified mathematical rules when solving equations, simplifying expressions, or integrating. For example, this option applies practical, but not generally correct rules for combining logarithms: $\ln(a) + \ln(b) = \ln(a \cdot b)$

MuPAD Outputs Contain Abbreviations for Better Readability

The new default format of presenting results enhances readability of long output expressions by using abbreviations.

MuPAD Solver for Ordinary Differential Equations Handles More Equation Types

The solver now can handle more than 200 additional types of second-order ordinary differential equations. The solver demonstrates improved performance.

MuPAD `limit` Function Now Can Compute Limits for Piecewise Functions

The enhanced `limit` function computes limits of piecewise functions including bidirectional and one-sided limits.

New and Improved MuPAD Special Functions

MuPAD includes the following new special functions:

- `laguerreL` represents Laguerre's L function.
- `erfc(x,n)` returns iterated integrals of the complementary error function.
- `meijerG` represents the Meijer G function.

The `hypergeom` special function demonstrates better performance.

New Calling Syntax for Test Report Function `prog::tcov`

The `prog::tcov` function that inspects the data collected during the code execution has the new syntax and set of options.

Compatibility Considerations

The new syntax is not valid in MuPAD versions earlier than 5.2. MuPAD 5.2 does not support the earlier syntax.

New Demos

To see new demos that use MuPAD Notebook Interface, type `mupadDemo` at the MATLAB command line or click MuPAD Notebooks Demo.

R2008b

Version: 5.1

Bug Fixes

R2008a+

Version: 5.0

Bug Fixes

R2007b+

Version: 4.9

New Features

Bug Fixes

Compatibility Considerations

MuPAD Engine Replaces Maple Engine

The default Symbolic Math Toolbox engine is now the MuPAD engine. For more information, see the MuPAD in Symbolic Math Toolbox chapter in the Symbolic Math Toolbox User's Guide.

Compatibility Considerations

The new engine causes many computed results to differ from those returned by previous versions of Symbolic Math Toolbox software.

General Differences

- Many computations return in a permuted order (such as $a + b$ instead of $b + a$).
- Some computations return in a different, mathematically equivalent form (such as $(\cos(x))^2$ instead of $1 - (\sin(x))^2$).
- `diff(dirac(t))` returns `dirac(t,1)` instead of `dirac(1,t)`.
- `sym(x, 'f')` no longer produces strings of the form `hex digits*2^n`. Instead the strings have the form $(2^e + N \cdot 2^e)$, where N and e are integers.
- For toolbox calculations, some symbols can only be used as symbolic variables, and not in strings: `E`, `I`, `D`, `O`, `beta`, `zeta`, `theta`, `psi`, `gamma`, `Ci`, `Si`, and `Ei`. This is because those symbols represent MuPAD reserved words, and are interpreted as the MuPAD word if you pass them as strings. The words `Ci`, `Si`, `Ei` represent special mathematical functions: the cosine integral, sine integral, and exponential integral respectively.
- Error and warning message IDs may have changed.
- Performance of numerical integration is slower than in previous versions.
- Subexpressions, calculated by the `subexpr` function, may be different than in previous versions.
- The `pretty` function no longer uses partial subexpressions (with syntax `%n`).

Calculus

- `Int` no longer evaluates some integrals, including many involving Bessel functions.
- `symsum(sin(k*pi)/k, 0, n)` no longer evaluates to `pi`.

Linear Algebra

-
- The output of `colspace` may differ from previous versions, but it is mathematically equivalent.
 - The `eig` function may return eigenvalues in a different order than previous versions. Expressions returned by `eig` may be larger than in previous versions.
 - The `jordan` function may return diagonal subblocks in a different order than previous versions.
 - `svd` may return singular values in a different order than previous versions.

Simplification

- The `coeffs` function may return multivariable terms in a different order than in previous versions.
- The `expand` function may return some trig and exponential expressions differently than in previous versions.
- The `simplify` function involving radicals and powers make fewer assumptions on unknown symbols than in previous versions.
- The `subexpr` function may choose a different subexpression to be the common subexpression than in previous versions.
- Subexpressions no longer have partial subexpressions (previous syntax `%n`).
- The `solve` function returns solutions with higher multiplicity only when solving a single polynomial.
- `acot(-x) = -acot(x)` instead of `pi - acot(x)` as in previous versions.
- `acoth(-x) = -acoth(x)` instead of `2*acoth(0) - acoth(x)` as in previous versions.
- The `simple` function has several differences:
 - The 'how' value `combine(trig)` has been replaced with `combine(sincos)`, `combine(sinhcosh)`, and `combine(ln)`.
 - The 'how' values involving `convert` have been replaced with `rewrite`.
 - A new 'how' value of `mlsimplify(100)` indicates the MuPAD function `Simplify(...,Steps=100)` simplified the expression.
 - Simplifications such as $(\sin(x)^2)^{1/2}$ to $\sin(x)$ are no longer performed, since the MuPAD language is careful not to make assumptions about the sign of $\sin(x)$.

Conversion

- Arithmetic involving the `vpa` function uses the current number of digits of precision. Variable precision arithmetic may have different rounding behaviors, and answers may differ in trailing digits (trailing zeros are now suppressed).
- The `char` function returns strings using MuPAD syntax instead of Maple™ syntax.
- Testing equality does not compare strings as in previous versions; the symbolic engine equality test is used.
- Saving and loading symbolic expressions is compatible with previous versions, except when the symbolic contents use syntax or functions that differ between Maple or MuPAD engines. For example, suppose you save the symbolic object `sym('transform::fourier(f,x,w)')`, which has MuPAD syntax. You get a MATLAB error if you try to open the object while using a Maple engine.
- LaTeX output from the `latex` function may look different than before.
- C and Fortran code generated with the `ccode` and `fortran` functions may be different than before. In particular, generated files have intermediate expressions as “optimized” code. For more information, see the Generating C or Fortran Code section of the User's Guide.
- `pretty` output may look different than before.

Equation Solving

- `solve` returns solutions with higher multiplicity only when solving a single polynomial.
- `solve` may return a different number of solutions than before.
- Some calls to `dsolve` that used to return results involving `lambertw` now return no solution.
- `dsolve` can now use the variable `C`.
- Some `dsolve` results are more complete (more cases are returned).
- Some `dsolve` results are less complete (not all previous answers are found).
- `finverse` may be able to find inverses for different classes of functions than before.
- When `finverse` fails to find an explicit inverse, it produces different output than before.

Transforms

- Fourier and inverse Fourier transforms return the MuPAD form `transform::fourier` when they cannot be evaluated. For example,


```
h = sin(x)/exp(x^2);
FF = fourier(h)
```

```
FF =
transform::fourier(sin(x)/exp(x^2), x, -w)
```

The reason for this behavior is the MuPAD definition of Fourier transform and inverse Fourier transform differ from their Symbolic Math Toolbox counterparts by the sign in the exponent:

	Symbolic Math Toolbox definition	MuPAD definition
Fourier transform	$F(w) = \int_{-\infty}^{\infty} f(x)e^{-iwx} dx$	$F(w) = \int_{-\infty}^{\infty} f(x)e^{iwx} dx$
Inverse Fourier transform	$f(x) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(w)e^{iwx} dw$	$f(x) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(w)e^{-iwx} dw$

- Several Fourier transforms can no longer be calculated, especially those involving Bessel functions.
- `ztrans` and `iztrans` may return more complicated expressions than before.

Special Mathematical Functions

- The three-parameter Riemann Zeta function is no longer supported.
- `heaviside(0) = 0.5`; in previous versions it was undefined.

maple

- The `maple`, `mhelp`, and `procread` functions error, unless a Maple engine is installed and selected with `symengine`.

New MuPAD Language and Libraries Supplant Extended Symbolic Math Toolbox Software

The functionality of the MuPAD language, together with the included libraries, goes far beyond that of the previous Symbolic Math Toolbox software. However, it is not identical

to that of the previous Extended Symbolic Math Toolbox™ software. The differences between these software packages are beyond the scope of these release notes.

You can access the MuPAD language in several ways:

- To learn the commands, syntax, and functionality of the language, use the MuPAD Help browser, or read the Tutorial.
- Use a MuPAD notebook, which contains an integrated help system for the language syntax.
- Use the new evalin function or feval function to access the MuPAD language at the MATLAB command line. More detail is available in the Calling Built-In MuPAD Functions from the MATLAB Command Window section of the User's Guide.

New MuPAD Help Viewer (GUI)

The MuPAD help viewer contains complete documentation of the MuPAD language, and of the MuPAD Notebook Interface. For more information, see the Getting Help for MuPAD section of the User's Guide.

New MuPAD Notebook Interface (GUI)

A MuPAD notebook is an interface for performing symbolic math computations with embedded math notation, graphics, animations, and text. It also enables you to share, document, and publish your calculations and graphics. For example, the MuPAD help viewer is essentially a special MuPAD notebook. For more information, see the Calculating in a MuPAD Notebook section of the User's Guide.

New MuPAD Editor and Debugger (GUI)

The MuPAD Editor GUI enables you to write custom symbolic functions and libraries in the MuPAD language. The Debugger enables you to test your code. For more information, consult the MuPAD help viewer.

New Functionality for Communication Between MATLAB Workspace and MuPAD

Function	Use
<code>doc(symengine,...)</code>	Access the MuPAD Help browser.

Function	Use
<code>evalin(symengine,...)</code>	Use MuPAD functionality in the MATLAB workspace.
<code>feval(symengine,...)</code>	Use MuPAD functionality in the MATLAB workspace.
<code>getVar</code>	Copy expressions residing in a MuPAD notebook into the MATLAB workspace.
<code>mupad</code>	Launch a MuPAD notebook .
<code>mupadwelcome</code>	Access MuPAD GUIs .
<code>reset(symengine,...)</code>	Clear the MuPAD engine for the MATLAB workspace.
<code>setVar</code>	Copy expressions residing in the MATLAB workspace into a MuPAD notebook.
<code>symvar</code>	Produce a list of symbolic objects in an expression.

For more information, see the Integration of MuPAD and MATLAB section of the User's Guide.

New symengine Command for Choosing a Maple Engine

If you own a compatible version of a Maple software, you can choose to have Symbolic Math Toolbox software use the Maple engine instead of a MuPAD engine. You might want to do this if you have existing Maple programs. Choose the engine by entering `symengine` at the MATLAB command line; this brings up a GUI for making your choice.

New matlabFunction Generates MATLAB Functions

The new `matlabFunction` generates MATLAB functions from symbolic expressions. `matlabFunction` writes the generated code to a file or creates a function handle. You can use the generated function handles and files in any MATLAB installation, even those without a Symbolic Math Toolbox license. For more information, see Generating MATLAB Functions in the User's Guide.

R2008a

Version: 3.2.3

Bug Fixes

R2007b

Version: 3.2.2

Bug Fixes

R2007a

Version: 3.2

New Features

Bug Fixes

Maple10 Access Added for Linux 64-bit Processors and Intel Macintosh Platforms

MATLAB now supports Maple Version 10 on 32-bit Windows, 32- and 64-bit Linux[®] platforms, and the Intel[®] and PowerPC[®] Macintosh platforms.

R2006b

Version: 3.1.5

New Features

Bug Fixes

Compatibility Considerations

Change in call to code generation package using the maple function

Calling a function in code generation package using Maple software now requires you to explicitly include the package name. For example,

```
maple('codegen[fortran](x^2-4)');
```

The generated code output using these methods is unaffected by this change.

Compatibility Considerations

In previous versions, functions in the code generation package of Maple software were made automatically available using the Maple `with` command, and did not require the package name. For example

```
maple('fortran(x^2-4)');
```

This sometimes caused a conflict when assigning to Maple variables having the same name as a function in the code generation package.