


# Polyspace<sup>®</sup> Bug Finder<sup>™</sup>

Reference

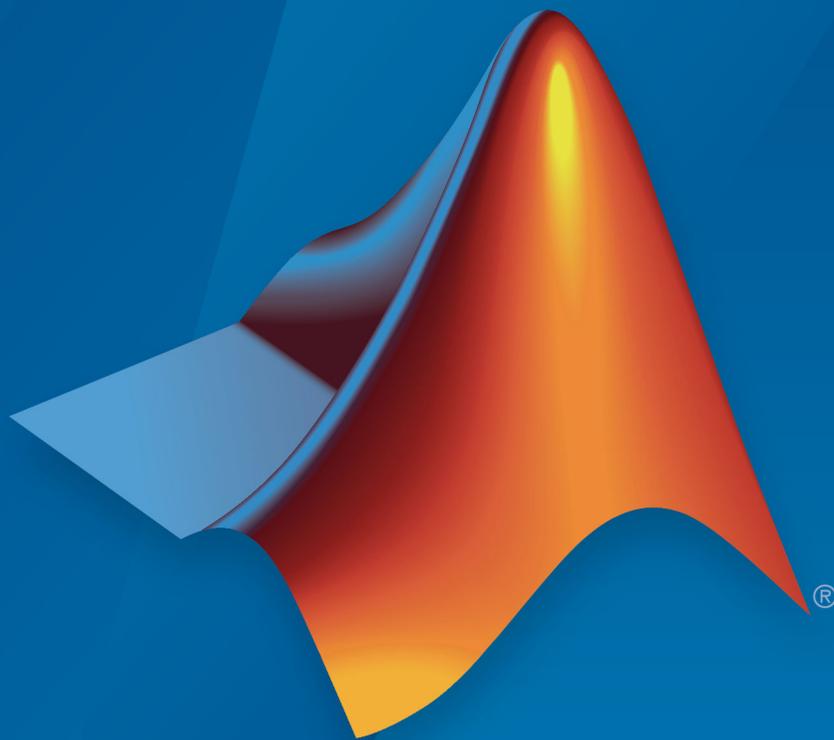

# MATLAB<sup>®</sup>&SIMULINK<sup>®</sup>

R2018b



# How to Contact MathWorks



Latest news: [www.mathworks.com](http://www.mathworks.com)  
Sales and services: [www.mathworks.com/sales\\_and\\_services](http://www.mathworks.com/sales_and_services)  
User community: [www.mathworks.com/matlabcentral](http://www.mathworks.com/matlabcentral)  
Technical support: [www.mathworks.com/support/contact\\_us](http://www.mathworks.com/support/contact_us)



Phone: 508-647-7000



The MathWorks, Inc.  
3 Apple Hill Drive  
Natick, MA 01760-2098

*Polyspace® Bug Finder™ Reference*

© COPYRIGHT 2013–2018 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

## Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See [www.mathworks.com/trademarks](http://www.mathworks.com/trademarks) for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

## Patents

MathWorks products are protected by one or more U.S. patents. Please see [www.mathworks.com/patents](http://www.mathworks.com/patents) for more information.

**Revision History**

September 2013	Online Only	New for Version 1.0 (Release 2013b)
March 2014	Online Only	Revised for Version 1.1 (Release 2014a)
October 2014	Online Only	Revised for Version 1.2 (Release 2014b)
March 2015	Online Only	Revised for Version 1.3 (Release 2015a)
September 2015	Online Only	Revised for Version 2.0 (Release 2015b)
October 2015	Online Only	Rereleased for Version 1.3.1 (Release 2015aSP1)
March 2016	Online Only	Revised for Version 2.1 (Release 2016a)
September 2016	Online Only	Revised for Version 2.2 (Release 2016b)
March 2017	Online Only	Revised for Version 2.3 (Release 2017a)
September 2017	Online Only	Revised for Version 2.4 (Release 2017b)
March 2018	Online Only	Revised for Version 2.5 (Release 2018a)
September 2018	Online Only	Revised for Version 2.6 (Release 2018b)





<b>1</b>	<b>Option Descriptions</b>
<b>2</b>	<b>Polyspace Command-Line Options</b>
<b>3</b>	<b>Defects</b>
<b>4</b>	<b>Functions, Properties, Classes, and Apps</b>
<b>5</b>	<b>MISRA C 2012</b>
<b>6</b>	<b>MISRA C++: 2008</b>
<b>7</b>	<b>Custom Coding Rules</b>
	<b>Group 1: Files</b> ..... 7-2 <b>Group 2: Preprocessing</b> ..... 7-3

<b>Group 3: Type definitions</b> .....	<b>7-4</b>
<b>Group 4: Structures</b> .....	<b>7-5</b>
<b>Group 5: Classes (C++)</b> .....	<b>7-6</b>
<b>Group 6: Enumerations</b> .....	<b>7-7</b>
<b>Group 7: Functions</b> .....	<b>7-8</b>
<b>Group 8: Constants</b> .....	<b>7-9</b>
<b>Group 9: Variables</b> .....	<b>7-10</b>
<b>Group 10: Name spaces (C++)</b> .....	<b>7-11</b>
<b>Group 11: Class templates (C++)</b> .....	<b>7-12</b>
<b>Group 12: Function templates (C++)</b> .....	<b>7-13</b>
<b>Group 20: Style</b> .....	<b>7-14</b>

## Code Metrics

**8**

## Polyspace Report Components – Alphabetical List

**9**

## Configuration Parameters

**10**

<b>Product mode</b> .....	<b>10-2</b>
Settings .....	<b>10-2</b>
Dependency .....	<b>10-2</b>

Command-Line Information .....	10-2
<b>Settings from (C)</b> .....	10-3
Settings .....	10-3
Dependency .....	10-4
Command-Line Information .....	10-4
<b>Settings from (C++)</b> .....	10-5
Settings .....	10-5
Dependency .....	10-5
Command-Line Information .....	10-6
<b>Use custom project file</b> .....	10-7
Settings .....	10-7
Dependency .....	10-7
Command-Line Information .....	10-7
<b>Project configuration</b> .....	10-8
Settings .....	10-8
Dependency .....	10-8
Command-Line Information .....	10-8
<b>Enable additional file list</b> .....	10-9
Settings .....	10-9
Command-Line Information .....	10-9
<b>Stub lookup tables</b> .....	10-10
Settings .....	10-10
Tips .....	10-11
Command-Line Information .....	10-11
<b>Input</b> .....	10-12
Settings .....	10-12
Command-Line Information .....	10-12
<b>Tunable parameters</b> .....	10-13
Settings .....	10-13
Command-Line Information .....	10-13
<b>Output</b> .....	10-14
Settings .....	10-14
Command-Line Information .....	10-14

<b>Model reference verification depth</b> .....	<b>10-15</b>
Settings .....	<b>10-15</b>
Command-Line Information .....	<b>10-15</b>
<b>Model by model verification</b> .....	<b>10-17</b>
Settings .....	<b>10-17</b>
Command-Line Information .....	<b>10-17</b>
<b>Output folder</b> .....	<b>10-18</b>
Settings .....	<b>10-18</b>
Command-Line Information .....	<b>10-18</b>
<b>Make output folder name unique by adding a suffix</b> .....	<b>10-19</b>
Settings .....	<b>10-19</b>
Command-Line Information .....	<b>10-19</b>
<b>Add results to current Simulink project</b> .....	<b>10-20</b>
Settings .....	<b>10-20</b>
Dependencies .....	<b>10-20</b>
Command-Line Information .....	<b>10-20</b>
<b>Open results automatically after verification</b> .....	<b>10-21</b>
Settings .....	<b>10-21</b>
Command-Line Information .....	<b>10-21</b>
<b>Check configuration before verification</b> .....	<b>10-22</b>
Settings .....	<b>10-22</b>
Command-Line Information .....	<b>10-22</b>
<b>Verify all occurrences</b> .....	<b>10-23</b>
Settings .....	<b>10-23</b>
Command-Line Information .....	<b>10-23</b>

## Approximations Used During Bug Finder Analysis

# 11

<b>Inputs in Polyspace Bug Finder</b> .....	<b>11-2</b>
<b>Global Variables in Polyspace Bug Finder</b> .....	<b>11-3</b>



# Option Descriptions

---

## Source code language (-lang)

Specify language of source files

### Description

Specify the language of your source files. Before specifying other configuration options, choose this option because other options change depending on your language selection.

If you add files during project setup, the language selection can change from the default.

Files Added	Source Code Language
Only files with extension .c	C
Only files with extension .cpp or .cc	CPP
Files with extension .c, .cpp, and .cc	C-CPP

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node. See “Dependencies” on page 1-3 for ways in which the source code language can be automatically determined.

**Command line:** Use the option `-lang`. See “Command-Line Information” on page 1-3.

### Settings

**Default:** C-CPP for hand code and C for model-generated code

C

If your project contains only C files, choose this setting. This value restricts the verification to C language conventions. All files are interpreted as C files, regardless of their file extension.

## CPP

If your project contains only C++ files, choose this setting. This value restricts the verification to C++ language conventions. All files are interpreted as C++ files, regardless of their file extension.

## C-CPP

If your project contains C and C++ source files, choose this setting. This value allows for C and C++ language conventions. .c files are interpreted as C files. Other file extensions are interpreted as C++ files.

# Dependencies

- The language option allows and disallows many options and option values. Some options change depending on your language selection. For more information, see the individual analysis option pages.
- If you create a Polyspace project or options file from your build system using the `polyspace-configure` command or `polyspaceConfigure` function, the value of this option is determined by the file extensions.

For a project with both .c and .cpp files, the language option C-CPP is used. In the subsequent analysis, each file is compiled based on the language standard determined by the file extensions.

# Command-Line Information

**Parameter:** -lang

**Value:** c | cpp | c-cpp

**Default:** c-cpp

**Example:** polyspace-bug-finder-nodesktop -lang c-cpp -sources  
"file1.c, file2.cpp"

**Example:** polyspace-bug-finder-nodesktop -lang c -sources  
"file1.c, file2.c"

# See Also

C standard version (-c-version) | C++ standard version (-cpp-version)

**Topics**

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

## C standard version (-c-version)

Specify C language standard followed in source code

### Description

Specify the C language standard that you follow in your source code.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node. See “Dependencies” on page 1-6 for other options that you must enable.

**Command line:** Use the option `-c-version`. See “Command-Line Information” on page 1-6.

### Why Use This Option

Use this option so that Polyspace can allow features specific to a C standard version during compilation. For instance, if you compile with GCC using the flag `-ansi` or `-std=c90`, specify `c90` for this option. If you are not sure of the language standard, specify `defined-by-compiler`.

For instance, suppose you use the boolean data type `_Bool` in your code. This type is defined in the C99 standard but unknown in prior standards such as C90. If the Polyspace compilation follows the C90 standard, you can see compilation errors.

Some MISRA C® rules are different based on whether you use the C90 or C99 standard. For instance, MISRA C:2012 Rule 5.2 requires that identifiers in the same scope and name space shall be distinct. If you use the C90 standard, different identifiers that have the same first 31 characters violate this rule. If you use the C99 standard, the number of characters increase to 63.

### Settings

**Default:** `defined-by-compiler`

## defined-by-compiler

The analysis uses a standard based on your specification for `Compiler (-compiler)`.

See “C/C++ Language Standard Used in Polyspace Analysis”.

## c90

The analysis uses the C90 Standard (ISO®/IEC 9899:1990).

## c99

The analysis uses the C99 Standard (ISO/IEC 9899:1999).

## c11

The analysis uses the C11 Standard (ISO/IEC 9899:2011).

## Dependencies

- This option is available only if you set `Source code language (-lang)` to C or C-CPP.
- If you create a project or options file from your build system using the `polyspace-configure` command or `polyspaceConfigure` function, the value of this option is automatically determined from your build system.

If the build system uses different standards for different files, the subsequent Polyspace analysis can emulate your build system and use different standards for compiling those files. If you open such a project in the Polyspace user interface, the option value is shown as `defined-by-compiler`. However, instead of one standard, Polyspace uses the hidden option `-options-for-sources` to associate different standards with different files.

## Command-Line Information

**Parameter:** `-c-version`

**Value:** `defined-by-compiler | c90 | c99 | c11`

**Default:** `defined-by-compiler`

**Example:** `polyspace-bug-finder-nodesktop -lang c -sources "file1.c, file2.c" -c-version c90`

## **See Also**

C++ standard version (-cpp-version) | Source code language (-lang)

## **Topics**

"C/C++ Language Standard Used in Polyspace Analysis"

"C11 Language Elements Supported in Polyspace"

## C++ standard version (-cpp-version)

Specify C++ language standard followed in source code

### Description

Specify the C++ language standard that you follow in your source code.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node. See “Dependencies” on page 1-9 for other options that you must enable.

**Command line:** Use the option `-cpp-version`. See “Command-Line Information” on page 1-10.

### Why Use This Option

Use this option so that Polyspace can allow features from a specific version of the C++ language standard during compilation. For instance, if you compile with GCC using the flag `-std=c++11` or `-std=gnu++11`, specify `cpp11` for this option. If you are not sure of the language standard, specify `defined-by-compiler`.

For instance, suppose you use range-based for loops. This type of for loop is defined in the C++11 standard but unrecognized in prior standards such as C++03. If the Polyspace compilation uses the C++03 standard, you can see compilation errors.

To check if your compiler allows features specific to a standard, compile code with macros specific to the standard using compiler settings that you typically use. For instance, to check for C++11-specific features, compile this code. The code contains a C++11-specific keyword `nullptr`. If the macro `__cplusplus` is not `201103L` (indicating C++11), this keyword is used and causes a compilation error.

```
#if defined(__cplusplus) && __cplusplus >= 201103L
    /* C++11 compiler */
#else
    void* ptr = nullptr;
#endif
```

If the code compiles, use `cpp11` for this option.

## Settings

**Default:** `defined-by-compiler`

`defined-by-compiler`

The analysis uses a standard based on your specification for `Compiler (-compiler)`.

See “C/C++ Language Standard Used in Polyspace Analysis”.

`cpp03`

The analysis uses the C++03 Standard (ISO/IEC 14882:2003).

`cpp11`

The analysis uses the C++11 Standard (ISO/IEC 14882:2011).

`cpp14`

The analysis uses the C++14 Standard (ISO/IEC 14882:2014).

## Dependencies

- This option is available only if you set `Source code language (-lang)` to CPP or C-CPP.
- If you create a project or options file from your build system using the `polyspace-configure` command or `polyspaceConfigure` function, the value of this option is automatically determined from your build system.

If the build system uses different standards for different files, the subsequent Polyspace analysis can emulate your build system and use different standards for compiling those files. If you open such a project in the Polyspace user interface, the option value is shown as `defined-by-compiler`. However, instead of one standard, Polyspace uses multiple standards for compiling the files. However, instead of one standard, Polyspace uses the hidden option `-options-for-sources` to associate different standards with different files.

## Command-Line Information

**Parameter:** `-cpp-version`

**Value:** `defined-by-compiler` | `cpp03` | `cpp11` | `cpp14`

**Default:** `defined-by-compiler`

**Example:** `polyspace-bug-finder-nodesktop -lang c -sources "file1.c,file2.c" -cpp-version cpp11`

## See Also

C standard version (`-c-version`) | Source code language (`-lang`)

## Topics

"C/C++ Language Standard Used in Polyspace Analysis"

"C++11 Language Elements Supported in Polyspace"

"C++14 Language Elements Supported in Polyspace"

# Compiler (-compiler)

Specify the compiler that you use to build your source code

## Description

Specify the compiler that you use to build your source code.

Polyspace fully supports the most common compilers used to develop embedded applications. See the list below. For these compilers, you can run analysis simply by specifying your compiler and target processor. For other compilers, specify **generic** as compiler name. If you face compilation errors, explicitly define compiler-specific extensions to work around the errors.

## Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node.

**Command line:** Use the option `-compiler`. See “Command-Line Information” on page 1-17.

## Why Use This Option

Polyspace uses this information to interpret syntax that is not part of the C/C++ Standard, but comes from language extensions.

For example, the option allows additional language keywords, such as `sfr`, `sbit`, and `bit`. If you do not specify your compiler, these additional keywords can cause compilation errors during Polyspace analysis.

## Settings

**Default:** `generic`

### generic

Analysis allows only standard syntax.

The language standard is determined by your choice for the following options:

- C standard version (`-c-version`)
- C++ standard version (`-cpp-version`)

If you do not specify a standard explicitly, the standard depends on your choice of compiler.

### gnu3.4

Analysis allows GCC 3.4 syntax.

### gnu4.6

Analysis allows GCC 4.6 syntax.

### gnu4.7

Analysis allows GCC 4.7 syntax.

For more information, see “Limitations” on page 1-15.

### gnu4.8

Analysis allows GCC 4.8 syntax.

For more information, see “Limitations” on page 1-15.

### gnu4.9

Analysis allows GCC 4.9 syntax.

For more information, see “Limitations” on page 1-15.

### gnu5.x

Analysis allows GCC 5.1, 5.2, 5.3, and 5.4 syntax.

For more information, see “Limitations” on page 1-15.

### gnu6.x

Analysis allows GCC 6.1, 6.2, and 6.3 syntax.

For more information, see “Limitations” on page 1-15.

### clang3.x

Analysis allows Clang 3.5, 3.6, 3.7, 3.8, and 3.9 syntax.

**visual9.0**

Analysis allows Microsoft® Visual C++® 2008 syntax.

**visual10.0**

Analysis allows Microsoft Visual C++ 2010 syntax.

This option implicitly enables the option `-no-stl-stubs`.

**visual11.0**

Analysis allows Microsoft Visual C++ 2012 syntax.

This option implicitly enables the option `-no-stl-stubs`.

**visual12.0**

Analysis allows Microsoft Visual C++ 2013 syntax.

This option implicitly enables the option `-no-stl-stubs`.

**visual14.0**

Analysis allows Microsoft Visual C++ 2015 syntax (supports Microsoft Visual Studio® update 2).

This option implicitly enables the option `-no-stl-stubs`.

**keil**

Analysis allows non-ANSI® C syntax and semantics associated with the Keil products from ARM ([www.keil.com](http://www.keil.com)).

**iar**

Analysis allows non-ANSI C syntax and semantics associated with the compilers from IAR Systems ([www.iar.com](http://www.iar.com)).

**codewarrior**

Analysis allows non-ANSI C syntax and semantics associated with the NXP CodeWarrior® compiler.

If you select `codewarrior`, the option `Target processor type (-target)` shows only the targets that are allowed for the NXP CodeWarrior compiler. See `NXP CodeWarrior Compiler (-compiler codewarrior)`

**diab**

Analysis allows non-ANSI C syntax and semantics associated with the Wind River® Diab compiler.

If you select `diab`, the option `Target processor type (-target)` shows only the targets that are allowed for the NXP CodeWarrior compiler. See `Diab Compiler (-compiler diab)`.

### `greenhills`

Analysis allows non-ANSI C syntax and semantics associated with a Green Hills® compiler.

If you select `greenhills`, the option `Target processor type (-target)` shows only the targets that are allowed for a Green Hills compiler. See `Green Hills Compiler (-compiler greenhills)`.

### `iar-ew`

Analysis allows non-ANSI C syntax and semantics associated with the IAR Embedded Workbench compiler.

If you select `iar-ew`, the option `Target processor type (-target)` shows only the targets that are allowed for the IAR Embedded Workbench compiler. See `IAR Embedded Workbench Compiler (-compiler iar-ew)`.

### `renesas`

Analysis allows non-ANSI C syntax and semantics associated with the Renesas® compiler.

If you select `renesas`, the option `Target processor type (-target)` shows only the targets that are allowed for the Renesas compiler. See `Renesas Compiler (-compiler renesas)`.

### `tasking`

Analysis allows non-ANSI C syntax and semantics associated with the TASKING compiler.

If you select `tasking`, the option `Target processor type (-target)` shows only the targets that are allowed for the TASKING compiler. See `TASKING Compiler (-compiler tasking)`.

### `ti`

Analysis allows non-ANSI C syntax and semantics associated with the Texas Instruments™ compiler.

If you select `ti`, the option `Target processor type (-target)` shows only the targets that are allowed for the Texas Instruments compiler. See `Texas Instruments Compiler (-compiler ti)`.

## Tips

- If you use a Visual Studio compiler, you must use a `Target processor type (-target)` option that sets `long long` to 64 bits. Compatible targets include: `i386`, `sparc`, `m68k`, `powerpc`, `tms320c3x`, `sharc21x61`, `mpc5xx`, `x86_64`, or `mcpcu` with `long long` set to 64 (`-long-long-is-64bits` at the command line).
- If you enable `Check JSF C++ rules (-jsf-coding-rules)`, select the compiler `generic`. If you use another compiler, Polyspace cannot check the JSF® coding rules that require conforming to the ISO standard. For example, AV Rule 8: “All code shall conform to ISO/IEC 14882:2002(E) standard C++.”

## Limitations

Polyspace does not support certain features of these compilers:

- GNU® compilers (version 4.7 or later):
  - Nested functions.

For instance, the function `bar` is nested in function `foo`:

```
int foo (int a, int b)
{
    int bar (int c) { return c * c; }

    return bar (a) + bar (b);
}
```

- Forward declaration of function parameters.

For instance, the parameter `len` is forward declared:

```
void func (int len; char data[len][len], int len)
{
    /* ... */
}
```

- Complex integer data types.

However, complex floating point data types are supported.

- Initialization of structures with flexible array members using an initialization list.

For instance, the structure `S` has a flexible array member `tab`. A variable of type `S` is directly initialized with an initialization list.

```
struct S {
    int x;
    int tab[];          /* flexible array member - not supported */
};
struct S s = { 0, 1, 2} ;
```

You see a warning during analysis and a red check in the results when you dereference, for instance, `s.tab[1]`.

- 128-bit variables.

Polyspace cannot analyze this data type semantically. Bug Finder allows use of 128-bit data types, but Code Prover shows a compilation error if you use such a data type, for instance, the GCC extension `__float128`.

- Visual Studio compilers:

- C++ Accelerated Massive Parallelism (AMP).

C++ AMP is a Visual Studio feature that accelerates your C++ code execution for certain types of data-parallel hardware on specific targets. You typically use the `restrict` keyword to enable this feature.

```
void Buffer() restrict(amp)
{
    ...
}
```

- `__assume` statements.

You typically use `__assume` with a condition that is false. The statement indicates that the optimizer must assume the condition to be henceforth true. Code Prover cannot reconcile this contradiction. You get the error:

```
Asked for compulsory presence of absent entity : assert
```

- Managed Extensions for C++ (required for the .NET Framework), or its successor, C++/CLI (C++ modified for Common Language Infrastructure)
- `__declspec` keyword with attributes other than `noreturn`, `nothrow`, `selectany` or `thread`.

## Command-Line Information

**Parameter:** -compiler

**Value:** generic | gnu3.4 | gnu4.6 | gnu4.7 | gnu4.8 | gnu4.9 | gnu5.x | gnu6.x | clang3.x | visual9.0 | visual10.0 | visual11.0 | visual12.0 | visual14.0 | keil | iar | codewarrior | diab | greenhills | iar-ew | renesas | tasking | ti

**Default:** generic

**Example:** polyspace-bug-finder-nodesktop -lang c -sources

"*file1.c, file2.c*" -compiler gnu4.6

**Example:** polyspace-bug-finder-nodesktop -lang cpp -sources

"*file1.cpp, file2.cpp*" -compiler visual9.0

## See Also

C standard version (-c-version) | C++ standard version (-cpp-version) |

Target processor type (-target)

## Topics

"Troubleshoot Compilation Errors"

"Supported Keil or IAR Language Extensions"

## Target processor type (-target)

Specify size of data types and endianness by using predefined target processor list

### Description

Specify the processor on which you deploy your code.

The target processor determines the sizes of fundamental data types and the endianness of the target machine. You can analyze code intended for an unlisted processor type by using one of the other processor types, if they share common data properties.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node. To see the sizes of types, click the **Edit** button to the right of the **Target processor type** drop-down list.

For some compilers, in the user interface, you see only the processors allowed for that compiler. For these compilers, you also cannot see the data type sizes in the user interface. See the links in the table below for the data type sizes.

**Command line:** Use the option `-target`. See “Command-Line Information” on page 1-21.

### Why Use This Option

You specify a target processor so that some of the Polyspace run-time checks are tailored to the data type sizes and other properties of that processor.

For instance, a variable can overflow for smaller values on a 32-bit processor such as `i386` compared to a 64-bit processor such as `x86_64`. If you select `x86_64` for your Polyspace analysis, but deploy your code to the `i386` processor, your Polyspace results are not always applicable.

Once you select a target processor, you can specify if the default sign of `char` is signed or unsigned. To determine which signedness to specify, compile this code using the compiler settings that you typically use:

```
#include <limits.h>
int array[(char)UCHAR_MAX]; /* If char is signed, the array size is -1
```

If the code compiles, the default sign of char is unsigned. For instance, on a GCC compiler, the code compiles with the `-fsigned-char` flag and fails to compile with the `-funsigned-char` flag.

## Settings

**Default:** i386

This table shows the size of each fundamental data type that Polyspace considers. For some targets, you can modify the default size by clicking the **Edit** button to the right of the **Target processor type** drop-down list. The optional values for those targets are shown in [brackets] in the table.

Target	char	short	int	long	long long	float	double	long double <sup>a</sup>	ptr	Default sign of char	endian	Alignment
i386	8	16	32	32	64	32	64	96	32	signed	Little	32
sparc	8	16	32	32	64	32	64	128	32	signed	Big	64
m68k <sup>b</sup>	8	16	32	32	64	32	64	96	32	signed	Big	64
powerpc	8	16	32	32	64	32	64	128	32	unsigned	Big	64
c-167	8	16	16	32	32	32	64	64	16	signed	Little	64
tms320c3x	32	32	32	32	64	32	32	64	32	signed	Little	32
sharc21x61	32	32	32	32	64	32	32 [64]	32 [64]	32	signed	Little	32
necv850	8	16	32	32	32	32	32	64	32	signed	Little	32 [16, 8]
hc08 <sup>c</sup>	8	16	16 [32]	32	32	32	32 [64]	32 [64]	16 <sup>d</sup>	unsigned	Big	32 [16]
hc12	8	16	16 [32]	32	32	32	32 [64]	32 [64]	32 <sup>e</sup>	signed	Big	32 [16]

Target	char	short	int	long	long long	float	double	long double <sup>a</sup>	ptr	Default sign of char	endian	Alignment
mpc5xx	8	16	32	32	64	32	32 [64]	32 [64]	32	signed	Big	32 [16]
c18	8	16	16	32 [24] <sub>e</sub>	32	32	32	32	16 [24]	signed	Little	8
x86_64	8	16	32	64 [32] <sub>f</sub>	64	32	64	128	64	signed	Little	64 [32]
mcpu... (Advanced) <sup>g</sup>	8 [16]	8 [16]	16 [32]	32	32 [64]	32	32 [64]	32 [64]	16 [32]	signed	Little	32 [16, 8]
Targets for NXP CodeWarrior compiler	See NXP CodeWarrior Compiler (-compiler codewarrior).											
Targets for Diab compiler	See Diab Compiler (-compiler diab).											
Targets for Green Hills compiler	See Green Hills Compiler (-compiler greenhills).											
Targets for IAR Embedded Workbench compiler	See IAR Embedded Workbench Compiler (-compiler iar-ew).											
Targets for Renesas compiler	See Renesas Compiler (-compiler renesas).											
Targets for TASKING compiler	See TASKING Compiler (-compiler tasking).											

Target	char	short	int	long	long long	float	double	long double <sup>a</sup>	ptr	Default sign of char	endian	Alignment
Targets for Texas Instruments compiler	See Texas Instruments Compiler (-compiler ti).											

- a. For targets where the size of `long double` is greater than 64 bits, the size used for computations is not always the same as the size listed in this table. The exceptions are:
- For targets `i386`, `x86_64` and `m68k`, 80 bits are used for computations, following the practice in common compilers.
  - For the target `tms320c3x`, 40 bits are used for computation, following the TMS320C3x specifications.
  - If you use a Visual compiler, the size of `long double` used for computations is the same as size of `double`, following the specification of Visual C++ compilers.
- b. The M68k family (68000, 68020, and so on) includes the “ColdFire” processor
- c. Non-ANSI C specified keywords and compiler implementation-dependent pragmas and interrupt facilities are not taken into account by this support
- d. All kinds of pointers (near or far pointer) have 2 bytes (hc08) or 4 bytes (hc12) of width physically.
- e. The `c18` target supports the type `short long` as 24 bits in size.
- f. Use option `-long-is-32bits` to support Microsoft C/C++ Win64 target.
- g. `mcpu` is a reconfigurable Micro Controller/Processor Unit target. You can use this type to configure one or more generic targets. For more information, see `Generic target options`.

## Tips

If your processor is not listed, use a similar processor that shares the same characteristics, or create an `mcpu` generic target processor. If your target processor does not match the characteristics of a predefined processor, contact MathWorks® technical support.

## Command-Line Information

**Parameter:** `-target`

**Value:** `i386` | `sparc` | `m68k` | `powerpc` | `c-167` | `tms320c3x` | `sharc21x61` | `necv850` | `hc08` | `hc12` | `mpc5xx` | `c18` | `x86_64` | `mcpu`

**Default:** `i386`

**Example:** `polyspace-bug-finder-nodesktop -target m68k`

You can override the default values for some targets by using specific command-line options. See the section **Command-Line Options** in `Generic target options`.

## **See Also**

### **Polyspace Results**

Lower Estimate of Local Variable Size | Higher Estimate of Local Variable Size

### **Topics**

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

# NXP CodeWarrior Compiler (-compiler codewarrior)

Specify NXP CodeWarrior compiler

## Description

Specify `codewarrior` for `Compiler` (-compiler) if you compile your code using a NXP CodeWarrior compiler. By specifying your compiler, you can avoid compilation errors from syntax that is not part of the Standard but comes from language extensions.

Then, specify your target processor type. If you select `codewarrior` for **Compiler**, in the user interface, you see only the processors allowed for a NXP CodeWarrior compiler. Your choice of target processor determines the size of fundamental data types, the endianness of the target machine and certain keyword definitions.

If you specify the `codewarrior` compiler, you must specify the path to your compiler header files. See “Provide Standard Library Headers for Polyspace Analysis”.

## Settings

To see the default sizes in bits for the fundamental types that the targets use, see the contextual help.

## Command-Line Information

**Parameter:** `-compiler codewarrior -target`

**Value:** `s12z | powerpc`

**Default:** `s12z`

**Example:** `polyspace-bug-finder-nodesktop -compiler codewarrior -target powerpc`

## See Also

Compiler (-compiler) | Target processor type (-target)

## **Topics**

“Specify Target Environment and Compiler Behavior”

**Introduced in R2018a**

## Diab Compiler (-compiler diab)

Specify the Wind River Diab compiler

### Description

Specify `diab` for `Compiler (-compiler)` if you compile your code using the Wind River Diab compiler. By specifying your compiler, you can avoid compilation errors from syntax that is not part of the Standard but comes from language extensions.

Then, specify your target processor type. If you select `diab` for **Compiler**, in the user interface, you see only the processors allowed for the Diab compiler. Your choice of target processor determines the size of fundamental data types, the endianness of the target machine and certain keyword definitions.

If you specify the `diab` compiler, you must specify the path to your compiler header files. See “Provide Standard Library Headers for Polyspace Analysis”.

The software supports version 5.9.6 and older versions of the Diab compiler.

### Settings

To see the default sizes in bits for the fundamental types that the targets use, see the contextual help.

### Tips

If you encounter errors during Polyspace analysis, see “Errors Related to Diab Compiler”.

### Command-Line Information

**Parameter:** `-compiler diab -target`

**Value:** `i386 | powerpc | arm | coldfire | mips | mcore | rh850 | superh | tricore`

**Default:** powerpc

**Example:** polyspace-bug-finder-nodesktop -compiler diab -target tricore

## See Also

Compiler (-compiler) | Target processor type (-target)

## Topics

“Specify Target Environment and Compiler Behavior”

**Introduced in R2016b**

# Green Hills Compiler (-compiler greenhills)

Specify Green Hills compiler

## Description

Specify `greenhills` for `Compiler (-compiler)` if you compile your code using a Green Hills compiler. By specifying your compiler, you can avoid compilation errors from syntax that is not part of the Standard but comes from language extensions.

Then, specify your target processor type. If you select `greenhills` for **Compiler**, in the user interface, you see only the processors allowed for a Green Hills compiler. Your choice of target processor determines the size of fundamental data types, the endianness of the target machine and certain keyword definitions.

If you specify the `greenhills` compiler, you must specify the path to your compiler header files. See “Provide Standard Library Headers for Polyspace Analysis”.

## Settings

To see the default sizes in bits for the fundamental types that the targets use, see the contextual help.

## Tips

- If you encounter errors during a Polyspace analysis, see “Errors Related to Green Hills Compiler”
- Polyspace supports the embedded configuration for the i386 target. If your x86 Green Hills compiler is configured for native Windows® development, you can see compilation errors or incorrect analysis results with Code Prover. Contact Technical Support.

For instance, Green Hills compilers consider a size of 12 bytes for `long double` for embedded targets, but 8 bytes for native Windows. Polyspace considers 12 bytes by default.

- If you create a Polyspace project from a build command that uses a Green Hills compiler, the compiler options `-filetype` and `-os_dir` are not implemented in the project. To emulate the `-os_dir` option, you can explicitly add the path argument of the option as an include folder to your Polyspace project.

### Command-Line Information

**Parameter:** `-compiler greenhills -target`

**Value:** `powerpc | powerpc64 | arm | arm64 | tricore | rh850 | arm | i386 | x86_64`

**Default:** `powerpc`

**Example:** `polyspace-bug-finder-nodesktop -compiler greenhills -target arm`

### See Also

Compiler (`-compiler`) | Target processor type (`-target`)

### Topics

“Specify Target Environment and Compiler Behavior”

**Introduced in R2017b**

# IAR Embedded Workbench Compiler (-compiler iar-ew)

Specify IAR Embedded Workbench compiler

## Description

Specify `iar-ew` for `Compiler (-compiler)` if you compile your code using a IAR Embedded Workbench compiler. By specifying your compiler, you can avoid compilation errors from syntax that is not part of the Standard but comes from language extensions.

Then, specify your target processor type. If you select `iar-ew` for **Compiler**, in the user interface, you see only the processors allowed for a IAR Embedded Workbench compiler. Your choice of target processor determines the size of fundamental data types, the endianness of the target machine and certain keyword definitions.

If you specify the `iar-ew` compiler, you must specify the path to your compiler header files. See “Provide Standard Library Headers for Polyspace Analysis”.

## Settings

To see the default sizes in bits for the fundamental types that the targets use, see the contextual help.

## Tips

Polyspace does not support some constructs specific to the IAR compiler.

For the list of unsupported constructs, see `codeprover_limitations.pdf` in `matlabroot\polyspace\verifier\code_prover`. Here, `matlabroot` is the MATLAB® installation folder, for instance, `C:\Program Files\MATLAB\R2017b`.

## Command-Line Information

**Parameter:** `-compiler iar-ew -target`

**Value:** `arm | avr | msp430 | rh850 | rl78`

**Default:** `arm`

**Example:** `polyspace-bug-finder-nodesktop -compiler iar-ew -target rl78`

## See Also

`Compiler (-compiler) | Target processor type (-target)`

## Topics

“Specify Target Environment and Compiler Behavior”

**Introduced in R2018a**

# Renesas Compiler (-compiler renesas)

Specify Renesas compiler

## Description

Specify `renesas` for the `Compiler (-compiler)` option if you compile your code with a Renesas compiler. By specifying your compiler, you can avoid compilation errors from syntax that is not part of the Standard but comes from language extensions.

Then, specify your target processor type. If you select `renesas` for **Compiler**, in the user interface, you see only the processors allowed for a Renesas compiler. Your choice of target processor determines the size of fundamental data types, the endianness of the target machine, and certain keyword definitions.

If you specify the `renesas` compiler, you must specify the path to your compiler header files. See “Provide Standard Library Headers for Polyspace Analysis”.

## Settings

To see the default sizes in bits for the fundamental types that the targets use, see the contextual help.

## Command-Line Information

**Parameter:** `-compiler renesas -target`

**Value:** `rl78 | rh850 | rx`

**Default:** `rl78`

**Example:** `polyspace-bug-finder-nodesktop -compiler renesas -target rx`

## See Also

`Compiler (-compiler) | Target processor type (-target)`

**Topics**

“Specify Target Environment and Compiler Behavior”

**Introduced in R2018b**

# TASKING Compiler (-compiler tasking)

Specify the Altium TASKING compiler

## Description

Specify `tasking` for `Compiler` (-compiler) if you compile your code using the Altium® TASKING compiler. By specifying your compiler, you can avoid compilation errors from syntax that is not part of the Standard but comes from language extensions.

Then, specify your target processor type. If you select `tasking` for **Compiler**, in the user interface, you see only the processors allowed for the TASKING compiler. Your choice of target processor determines the size of fundamental data types, the endianness of the target machine and certain keyword definitions.

If you specify the `tasking` compiler, you must specify the path to your compiler header files. See “Provide Standard Library Headers for Polyspace Analysis”.

The software supports different versions of the TASKING compiler, depending on the target:

- TriCore: 6.0 and older versions
- C166: 4.0 and older versions
- ARM: 5.2 and older versions
- RH850: 2.2 and older versions

## Settings

To see the default sizes in bits for the fundamental types that the targets use, see the contextual help.

## Tips

- Polyspace does not support some constructs specific to the TASKING compiler.

For the list of unsupported constructs, see `codeprover_limitations.pdf` in `matlabroot\polyspace\verifier\code_prover`. Here, `matlabroot` is the MATLAB installation folder, for instance, `C:\Program Files\MATLAB\R2017b`.

- The CPU used is TC1793. If you use a different CPU, set the following analysis options in your project:
  - Disabled preprocessor definitions (-U): Undefine the macro `__CPU_TC1793B__`.
  - Preprocessor definitions (-D): Define the macro `__CPU__`. Enter `__CPU__=xxx`, where `xxx` is the name of your CPU.

Additionally, define the equivalent of the macro `__CPU_TC1793B__` for your CPU. For instance, enter `__CPU_TC1793A__`.

Instead of manually specifying your compiler, if you trace your build command (makefile), Polyspace can detect your CPU and add the required definitions in your project.

- For some errors related to TASKING compiler-specific constructs, see solutions in “Errors Related to TASKING Compiler”.

## Command-Line Information

**Parameter:** `-compiler tasking -target`

**Value:** `tricore | c166 | rh850 | arm`

**Default:** `tricore`

**Example:** `polyspace-bug-finder-nodesktop -compiler tasking -target tricore`

## See Also

`Compiler (-compiler) | Target processor type (-target)`

## Topics

“Specify Target Environment and Compiler Behavior”

**Introduced in R2017a**

# Texas Instruments Compiler (-compiler ti)

Specify Texas Instruments compiler

## Description

Specify `ti` for `Compiler (-compiler)` if you compile your code using a Texas Instruments compiler. By specifying your compiler, you can avoid compilation errors from syntax that is not part of the Standard but comes from language extensions.

Then, specify your target processor type. If you select `ti` for **Compiler**, in the user interface, you see only the processors allowed for a Texas Instruments compiler. Your choice of target processor determines the size of fundamental data types, the endianness of the target machine and certain keyword definitions.

If you specify the `ti` compiler, you must specify the path to your compiler header files. See “Provide Standard Library Headers for Polyspace Analysis”.

## Settings

To see the default sizes in bits for the fundamental types that the targets use, see the contextual help.

## Tips

Polyspace does not support some constructs specific to the Texas Instruments compiler.

For the list of unsupported constructs, see `codeprover_limitations.pdf` in `matlabroot\polyspace\verifier\code_prover`. Here, `matlabroot` is the MATLAB installation folder, for instance, `C:\Program Files\MATLAB\R2017b`.

## Command-Line Information

**Parameter:** `-compiler ti -target`

**Value:** c28x | c6000 | arm | msp430

**Default:** c28x

**Example:** polyspace-bug-finder-nodesktop -compiler ti -target msp430

## See Also

Compiler (-compiler) | Target processor type (-target)

## Topics

“Specify Target Environment and Compiler Behavior”

**Introduced in R2018a**

# Generic target options

Specify size of data types and endianness by creating your own target processor

## Description

The **Generic target options** dialog box opens when you set the **Target processor type** to `mcpu`.

Allows the specification of a generic "Micro Controller/Processor Unit" target. Use the dialog box to specify the name of a new `mcpu` target, for example *MyTarget*. That new target is added to the **Target processor type** option list.

Changing the generic target has consequences for:

- Detection of overflow
- Computation of `sizeof` objects

The **Target processor type** option is available on the **Target & Compiler** node in the **Configuration** pane.

## Settings

**Default characteristics of a new target:** listed as *type* [*size*]

- *char* [8]
- *short* [16]
- *int* [16]
- *long* [32]
- *long long* [32]
- *float* [32]
- *double* [32]
- *long double* [32]

- *pointer* [16]
- *char* is signed
- *endianness* is little-endian

## Dependency

A custom target can only be created when Target processor type (`-target`) is set to `mcpu`.

A custom target is not available when Compiler (`-compiler`) is set to one of the `visual*` options.

## Command-Line Options

When using the command line, specify your target with the other target specification options.

Option	Description	Available With	Example
<code>-little-endian</code>	<p>Little-endian architectures are Less Significant byte First (LSF). For example: <code>i386</code>.</p> <p>Specifies that the less significant byte of a short integer (e.g. <code>0x00FF</code>) is stored at the first byte (<code>0xFF</code>) and the most significant byte (<code>0x00</code>) at the second byte.</p>	<code>mcpu</code>	<code>polyspace-bug-finder-nodesktop -target mcpu -little-endian</code>

Option	Description	Available With	Example
<code>-big-endian</code>	<p>Big-endian architectures are Most Significant byte First (MSF). For example: SPARC, m68k.</p> <p>Specifies that the most significant byte of a short integer (e.g. 0x00FF) is stored at the first byte (0x00) and the less significant byte (0xFF) at the second byte.</p>	mcpu	<pre>polyspace-bug-finder- nodesktop -target mcpu - big-endian</pre>
<code>-default-sign-of-char [signed   unsigned]</code>	<p>Specify default sign of char.</p> <p><code>signed</code>: Specifies that char is signed, overriding target's default.</p> <p><code>unsigned</code>: Specifies that char is unsigned, overriding target's default.</p>	All targets	<pre>polyspace-bug-finder- nodesktop -default-sign- of-char unsigned -target mcpu</pre>
<code>-char-is-16bits</code>	<p>char defined as 16 bits and all objects have a minimum alignment of 16 bits</p> <p>Incompatible with <code>-short-is-8bits</code> and <code>-align 8</code></p>	mcpu	<pre>polyspace-bug-finder- nodesktop -target mcpu - char-is-16bits</pre>

Option	Description	Available With	Example
<code>-short-is-8bits</code>	Define <code>short</code> as 8 bits, regardless of sign	<code>mcpu</code>	<code>polyspace-bug-finder-nodesktop -target mcpu -short-is-8bits</code>
<code>-int-is-32bits</code>	Define <code>int</code> as 32 bits, regardless of sign. Alignment is also set to 32 bits.	<code>mcpu</code> , <code>hc08</code> , <code>hc12</code> , <code>mpc5xx</code>	<code>polyspace-bug-finder-nodesktop -target mcpu -int-is-32bits</code>
<code>-long-is-32bits</code>	Define <code>long</code> as 32 bits, regardless of sign. Alignment is also set to 32 bits.  If your project sets <code>int</code> to 64 bits, you cannot use this option.	All targets	<code>polyspace-bug-finder-nodesktop -target mcpu -long-is-32bits</code>
<code>-long-long-is-64bits</code>	Define <code>long long</code> as 64 bits, regardless of sign. Alignment is also set to 64 bits.	<code>mcpu</code>	<code>polyspace-bug-finder-nodesktop -target mcpu -long-long-is-64bits</code>
<code>-double-is-64bits</code>	Define <code>double</code> and <code>long double</code> as 64 bits, regardless of sign.	<code>mcpu</code> , <code>sharc21x61</code> , <code>hc08</code> , <code>hc12</code> , <code>mpc5xx</code>	<code>polyspace-bug-finder-nodesktop -target mcpu -double-is-64bits</code>
<code>-pointer-is-24bits</code>	Define <code>pointer</code> as 24 bits, regardless of sign.	<code>c18</code>	<code>polyspace-bug-finder-nodesktop -target c18 -pointer-is-24bits</code>
<code>-pointer-is-32bits</code>	Define <code>pointer</code> as 32 bits, regardless of sign.	<code>mcpu</code>	<code>polyspace-bug-finder-nodesktop -target mcpu -pointer-is-32bits</code>

Option	Description	Available With	Example
-align [32 16 8]	<p>Specifies the largest alignment of struct or array objects to the 32, 16 or 8 bit boundaries.</p> <p>Consequently, the array or struct storage is strictly determined by the size of the individual data objects without member and end padding.</p>	<p>mcpu, hc08, hc12, mpc5xx.</p> <p>Other than mcpu, all targets support only 16 or 32 bits.</p>	<p>polyspace-bug-finder-nodesktop -target mcpu -align 16</p>

## Common Generic Targets

The following tables describe the characteristics of common generic targets.

### ST7 (Hiware C compiler : HiCross for ST7)

ST7	char	short	int	long	long long	float	double	long double	ptr	char is	endian
size	8	16	16	32	32	32	32	32	16/32	unsigned	Big
alignment	8	16/8	16/8	32/16/8	32/16/8	32/16/8	32/16/8	32/16/8	32/16/8	N/A	N/A

**ST9 (GNU C compiler : gcc9 for ST9)**

ST9	char	short	int	long	long long	float	double	long double	ptr	char is	endian
size	8	16	16	32	32	32	64	64	16/64	unsigned	Big
alignment	8	8	8	8	8	8	8	8	8	N/A	N/A

**Hitachi H8/300, H8/300L**

Hitachi H8/300, H8/300L	char	short	int	long	long long	float	double	long double	ptr	char is	endian
size	8	16	16/32	32	64	32	64	64	16	unsigned	Big
alignment	8	16	16	16	16	16	16	16	16	N/A	N/A

**Hitachi H8/300H, H8S, H8C, H8/Tiny**

Hitachi H8/300H, H8S, H8C, H8/Tiny	char	short	int	long	long long	float	double	long double	ptr	char is	endian
size	8	16	16/32	32	64	32	64	64	32	unsigned	Big
alignment	8	16	32/16	32/16	32/16	32/16	32/16	32/16	32/16	N/A	N/A

**See Also**

Target processor type (-target)

**Topics**

“Specify Target Environment and Compiler Behavior”

## Sfr type support (-sfr-types)

Specify sizes of sfr types for code developed with Keil or IAR compilers

### Description

Specify sizes of sfr types (types that define special function registers).

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node. See “Dependency” on page 1-43 for other options you must also enable.

**Command line:** Use the option -sfr-types. See “Command-Line Information” on page 1-44.

### Why Use This Option

Use this option if you have statements such as `sfr addr = 0x80;` in your code. sfr types are not standard C types. Therefore, you must specify their sizes explicitly for the Polyspace analysis.

### Settings

#### No Default

List each sfr name and its size in bits.

### Dependency

This option is available only when Compiler (-compiler) is set to keil or iar.

## Command-Line Information

**Syntax:** `-sfr-types sfr_name=size_in_bits,...`

**No Default**

**Name Value:** an sfr name such as `sfr16`.

**Size Value:** `8 | 16 | 32`

**Example:** `polyspace-bug-finder-nodesktop -lang c -compiler iar -sfr-types sfr=8,sfr16=16 ...`

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

“Supported Keil or IAR Language Extensions”

## Division round down (-div-round-down)

Round down quotients from division or modulus of negative numbers instead of rounding up

### Description

Specify whether quotients from division and modulus of negative numbers are rounded up or down.

---

**Note**  $a = (a / b) * b + a \% b$  is always true.

---

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node.

**Command line:** Use the option `-div-round-down`. See “Command-Line Information” on page 1-46.

### Why Use This Option

Use this option to emulate your compiler.

The option is relevant only for compilers following C90 standard (ISO/IEC 9899:1990). The standard stipulates that *"if either operand of / or % is negative, whether the result of the / operator, is the largest integer less or equal than the algebraic quotient or the smallest integer greater or equal than the quotient, is implementation defined, same for the sign of the % operator"*. The standard allows compilers to choose their own implementation.

For compilers following the C99 standard ((ISO/IEC 9899:1999), this option is not required. The standard enforces division with rounding towards zero (section 6.5.5).

## Settings

On

If either operand / or % is negative, the result of the / operator is the largest integer less than or equal to the algebraic quotient. The result of the % operator is deduced from  $a \% b = a - (a / b) * b$ .

*Example:* `assert(-5/3 == -2 && -5%3 == 1);` is true.

Off (default)

If either operand of / or % is negative, the result of the / operator is the smallest integer greater than or equal to the algebraic quotient. The result of the % operator is deduced from  $a \% b = a - (a / b) * b$ .

This behavior is also known as rounding towards zero.

*Example:* `assert(-5/3 == -1 && -5%3 == -2);` is true.

## Command-Line Information

**Parameter:** `-div-round-down`

**Default:** Off

**Example:** `polyspace-bug-finder-nodesktop -div-round-down`

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

# Enum type definition (-enum-type-definition)

Specify how to represent an enum with a base type

## Description

Allow the analysis to use different base types to represent an enumerated type, depending on the enumerator values and the selected definition. When using this option, each enum type is represented by the smallest integral type that can hold its enumeration values.

This option is available on the **Target & Compiler** node in the **Configuration** pane.

## Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node.

**Command line:** Use the option `-enum-type-definition`. See “Command-Line Information” on page 1-49.

## Why Use This Option

Your compiler represents enum variables as constants of a base integer type. Use this option so that you can emulate your compiler.

To check your compiler settings, compile this code using the compiler settings that you typically use:

```
#include <assert.h>
#include <limits.h>
```

```
enum { MAXSIGNEDBYTE=127 } mysmallenum_t;
int dummy[(int)sizeof(mysmallenum_t) - (int)sizeof(int)]; /* Breakpoint 1 */
```

```
enum { MYMAXINT = INT_MAX } myintenum_t;
int main(void) {
```

```
    assert((MYMAXINT + 1) < 0); /* Breakpoint 2 */
    assert((MYMAXINT + 1) >= 0); /* Breakpoint 3 */
    assert(0); /* Breakpoint 4 */

    return 0;
}
```

If compilation does not fail even at breakpoint 4, your `assert` statements do not behave as expected. Check your compiler documentation and change your compiler settings. If compilation fails at:

- Breakpoint 1: Use `defined-by-compiler` for this option.
- Breakpoint 2: Use `auto-signed-first` for this option.
- Breakpoint 3: Use `auto-unsigned-first` for this option.

## Settings

**Default:** `defined-by-compiler`

`defined-by-compiler`

Uses the signed integer type for all compilers except `gnu`, `clang` and `tasking`.

For the `gnu` and `clang` compilers, it uses the first type that can hold all of the enumerator values from this list: `signed int`, `unsigned int`, `signed long`, `unsigned long`, `signed long long`, and `unsigned long long`.

For the `tasking` compiler, it uses the first type that can hold all of the enumerator values from this list: `char`, `unsigned char`, `short`, `unsigned short`, `int`, and `unsigned int`.

`auto-signed-first`

Uses the first type that can hold all of the enumerator values from this list: `signed char`, `unsigned char`, `signed short`, `unsigned short`, `signed int`, `unsigned int`, `signed long`, `unsigned long`, `signed long long`, and `unsigned long long`.

`auto-unsigned-first`

Uses the first type that can hold all of the enumerator values from these lists:

- If enumerator values are positive: unsigned char, unsigned short, unsigned int, unsigned long, and unsigned long long.
- If one or more enumerator values are negative: signed char, signed short, signed int, signed long, and signed long long.

## Command-Line Information

**Parameter:** -enum-type-definition

**Value:** defined-by-compiler | auto-signed-first | auto-unsigned-first

**Default:** defined-by-compiler

**Example:** polyspace-bug-finder-nodesktop -enum-type-definition auto-signed-first

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

## Signed right shift (-logical-signed-right-shift)

Specify how to treat the sign bit for logical right shifts on signed variables

### Description

Choose between arithmetic and logical shift for right shift operations on negative values.

This option does not modify compile-time expressions. For more details, see “Limitation” on page 1-51.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node.

**Command line:** Use the option `-logical-signed-right-shift`. See “Command-Line Information” on page 1-51.

### Why Use This Option

The C99 Standard (sec 6.5.7) states that for a right-shift operation  $x1 \gg x2$ , if  $x1$  is signed and has negative values, the behavior is implementation-defined. Different compilers choose between arithmetic and logical shift. Use this option to emulate your compiler.

### Settings

**Default:** `Arithmetical`

`Arithmetical`

The sign bit remains:

```
(-4) >> 1 = -2
(-7) >> 1 = -4
 7 >> 1 = 3
```

## Logical

0 replaces the sign bit:

```
(-4) >> 1 = (-4U) >> 1 = 2147483646
(-7) >> 1 = (-7U) >> 1 = 2147483644
 7 >> 1 = 3
```

## Limitation

In compile-time expressions, this Polyspace option does not change the standard behavior for right shifts.

For example, consider this right shift expression:

```
int arr[ ((-4) >> 20) ];
```

The compiler computes array sizes, so the expression `(-4) >> 20` is evaluated at compilation time. Logically, this expression is equivalent to 4095. However, arithmetically, the result is -1. This statement causes a compilation error (arrays cannot have negative size) because the standard right-shift behavior for signed integers is arithmetic.

## Command-Line Information

When using the command line, arithmetic is the default computation mode. When this option is set, logical computation is performed.

**Parameter:** `-logical-signed-right-shift`

**Default:** Arithmetic signed right shifts

**Example:** `polyspace-bug-finder-nodesktop -logical-signed-right-shift`

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

## Block char16/32\_t types (-no-uliterals)

Disable Polyspace definitions for char16\_t or char32\_t

### Description

Specify that the analysis must not define char16\_t or char32\_t types.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node. See “Dependencies” on page 1-53 for other options you must also enable.

**Command line:** Use the option -no-uliterals. See “Command-Line Information” on page 1-53.

### Why Use This Option

If your compiler defines char16\_t and/or char32\_t through a typedef statement or by using includes, use this option to turn off the standard Polyspace definition of char16\_t and char32\_t.

To check if your compiler defines these types, compile this code using the compiler settings that you typically use:

```
typedef unsigned short char16_t;  
typedef unsigned long char32_t;
```

If the file compiles, it means that your compiler has already defined char16\_t and char32\_t. Enable this Polyspace option.

### Settings

On

The analysis does not allow char16\_t and char32\_t types.

Off (default)

The analysis allows char16\_t and char32\_t types.

## Dependencies

You can select this option only when these conditions are true:

- Source code language (-lang) is CPP or C-CPP.
- Compiler (-compiler) is either generic or a gnu version.

## Command-Line Information

**Parameter:** -no-uliterals

*Default:* off

**Example:** polyspace-bug-finder-nodesktop -lang cpp -compiler gnu4.7 -  
cpp-version cpp11 -no-uliterals

## See Also

C++ standard version (-cpp-version) | Compiler (-compiler)

## Topics

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

## Pack alignment value (-pack-alignment-value)

Specify default structure packing alignment for code developed in Visual C++

### Description

Specify the default packing alignment (in bytes) for structures, unions, and class members.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node.

**Command line:** Use the option `-pack-alignment-value`. See “Command-Line Information” on page 1-55.

### Why Use This Option

If you use compiler options to specify how members of a structure are packed into memory, use this option to emulate your compiler.

For instance, if you use the Visual Studio option `/Zp` to specify an alignment, use this option for your Polyspace analysis.

If you use `#pragma pack` directives in your code to specify alignment, and also specify this option for analysis, the `#pragma pack` directives take precedence. See “#pragma Directives” (Polyspace Code Prover).

### Settings

**Default:** 8

You can enter one of these values:

- 1
- 2
- 4
- 8
- 16

## Command-Line Information

**Parameter:** -pack-alignment-value

**Value:** 1 | 2 | 4 | 8 | 16

**Default:** 8

**Example:** polyspace-bug-finder-nodesktop -compiler visual10 -pack-alignment-value 4

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

## Ignore pragma pack directives (-ignore-pragma-pack)

Ignore #pragma pack directives

### Description

Specify that the analysis must ignore #pragma pack directives in the code.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node.

**Command line:** Use the option -ignore-pragma-pack. See “Command-Line Information” on page 1-57.

### Why Use This Option

Use this option if #pragma pack directives in your code cause linking errors.

For instance, you have two structures with the same name in your code, but one declaration follows a #pragma pack(2) statement. Because the default alignment is 8 bytes, the different packing for the two structures causes a linking error. Use this option to avoid such errors. See also “#pragma Directives” (Polyspace Code Prover).

### Settings

On

The analysis ignores the #pragma directives.

Off (default)

The analysis takes into account specifications in the #pragma directives.

## **Command-Line Information**

**Parameter:** -ignore-pragma-pack

**Default:** Off

**Example:** polyspace-bug-finder-nodesktop -ignore-pragma-pack

## **See Also**

## Management of `size_t` (-size-t-type-is)

Specify the underlying data type of `size_t`

### Description

Specify the underlying data type of `size_t` explicitly: `unsigned int`, `unsigned long` or `unsigned long long`. If you do not specify this option, your choice of compiler determines the underlying type.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node.

**Command line:** Use the option `-size-t-type-is`. See “Command-Line Information” on page 1-59.

### Why Use This Option

The analysis associates a data type with `size_t` when you specify your compiler. If you use a compiler option that changes this default type, emulate your compiler option by using this analysis option.

If you run into compilation errors during Polyspace analysis and trace the error to the definition of `size_t`, it is possible that you use a compiler option and change your compiler default. To probe further, compile this code with your compiler using the options that you typically use:

```
/* Header defines malloc as void* malloc (size_t size)
#include <stdio.h>

void* malloc (unsigned int size);
```

If the file does not compile, your compiler options cause `size_t` to be defined as `unsigned long` or `unsigned long long`. Replace `unsigned int` with `unsigned long` and try again.

## Settings

**Default:** defined-by-compiler

defined-by-compiler

Your specification for `Compiler` (-compiler) determines the underlying type of `size_t`.

unsigned-int

The analysis considers `unsigned int` as the underlying type of `size_t`.

unsigned-long

The analysis considers `unsigned long` as the underlying type of `size_t`.

unsigned-long-long

The analysis considers `unsigned long long` as the underlying type of `size_t`.

## Command-Line Information

**Parameter:** -size-t-type-is

**Value:** defined-by-compiler | unsigned-int | unsigned-long | unsigned-long-long

**Default:** defined-by-compiler

**Example:** polyspace-bug-finder-nodesktop -size-t-type-is unsigned-long

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

## Management of `wchar_t` (`-wchar-t-type-is`)

Specify the underlying data type of `wchar_t`

### Description

Specify the underlying data type of `wchar_t` explicitly. If you do not specify this option, your choice of compiler determines the underlying type.

### Set Option

**User interface:** In your project configuration, the option is on the **Target & Compiler** node.

**Command line:** Use the option `-wchar-t-type-is`. See “Command-Line Information” on page 1-61.

### Why Use This Option

The analysis associates a data type with `wchar_t` when you specify your compiler. If you use a compiler option that changes this default type, emulate your compiler option by using this analysis option.

### Settings

**Default:** `defined-by-compiler`

`defined-by-compiler`

Your specification for `Compiler` (`-compiler`) determines the underlying type of `wchar_t`.

`signed-short`

The analysis considers `signed short` as the underlying type of `wchar_t`.

`unsigned-short`

The analysis considers `unsigned short` as the underlying type of `wchar_t`.

`signed-int`

The analysis considers `signed int` as the underlying type of `wchar_t`.

`unsigned-int`

The analysis considers `unsigned int` as the underlying type of `wchar_t`.

`signed-long`

The analysis considers `signed long` as the underlying type of `wchar_t`.

`unsigned-long`

The analysis considers `unsigned long` as the underlying type of `wchar_t`.

## Command-Line Information

**Parameter:** `-wchar-t-type-is`

**Value:** `defined-by-compiler` | `signed-short` | `unsigned-short` | `signed-int` | `unsigned-int` | `signed-long` | `unsigned-long`

**Default:** `defined-by-compiler`

**Example:** `polyspace-bug-finder-nodesktop -wchar-t-type-is signed-int`

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Specify Target Environment and Compiler Behavior”

## Ignore link errors (-no-extern-c)

Ignore certain linking errors

### Description

Specify that the analysis must ignore certain linking errors.

### Set Option

**User interface:** In your project configuration, the option is on the **Environment Settings** node. See “Dependency” on page 1-63 for other options that you must also enable.

**Command line:** Use the option -no-extern-C. See “Command-Line Information” on page 1-63.

### Why Use This Option

Some functions may be declared inside an `extern "C" { }` block in some files and not in others. Then, their linkage is not the same and it causes a link error according to the ANSI standard.

Applying this option will cause Polyspace to ignore this error. This permissive option may not resolve all the extern C linkage errors.

### Settings

On

Ignore linking errors if possible.

Off (default)

Stop analysis for linkage errors.

## Dependency

This option is available only if you set Source code language (-lang) to CPP or C-CPP.

## Command-Line Information

**Parameter:** -no-extern-C

**Default:** off

**Example:** polyspace-bug-finder-nodesktop -lang cpp -no-extern-C

## See Also

### Topics

“Specify Polyspace Analysis Options”

## Preprocessor definitions (-D)

Replace macros in preprocessed code

### Description

Replace macros with their definitions in preprocessed code.

### Set Option

**User interface:** In your project configuration, the option is on the **Macros** node.

**Command line:** Use the option -D. See “Command-Line Information” on page 1-66.

### Why Use This Option

Use this option to emulate your compiler behavior. For instance, if your compiler considers a macro `_WIN32` as defined when you build your code, it executes code in a `#ifdef _WIN32` statement. If Polyspace does not consider that macro as defined, you must use this option to replace the macro with 1.

Depending on your settings for `Compiler (-compiler)`, some macros are defined by default. Use this option to define macros that are not implicitly defined.

Typically, you recognize from compilation errors that a certain macro is not defined. For instance, the following code does not compile if the macro `_WIN32` is not defined.

```
#ifdef _WIN32
    int env_var;
#endif

void set() {
    env_var=1;
}
```

The error message states that `env_var` is undefined. However, the definition of `env_var` is in the `#ifdef _WIN32` statement. The underlying cause for the error is that the macro `_WIN32` is not defined. You must define `_WIN32`.

## Settings

### No Default

Using the  button, add a row for the macro you want to define. The definition must be in the format *Macro=Value*. If you want Polyspace to ignore the macro, leave the *Value* blank.

For example:

- `name1=name2` replaces all instances of `name1` by `name2`.
- `name=` instructs the software to ignore `name`.
- `name` with no equals sign or value replaces all instances of `name` by 1. To define a macro to execute code in a `#ifdef macro_name` statement, use this syntax.

## Tips

- If Polyspace does not support a non-ANSI keyword and shows a compilation error, use this option to replace all occurrences of the keyword with a blank string in preprocessed code. The replacement occurs only for the purposes of the analysis. Your original source code remains intact.

For instance, if your compiler supports the `__far` keyword, to avoid compilation errors:

- In the user interface, enter `__far=`.
- On the command line, use the flag `-D __far=`.

The software replaces the `__far` keyword with a blank string during preprocessing. For example:

```
int __far* pValue;
```

is converted to:

```
int * pValue;
```

- Polyspace recognizes keywords such as `restrict` and does not allow their use as identifiers. If you use those keywords as identifiers (because your compiler does not recognize them as keywords), replace the disallowed name with another name using

this option. The replacement occurs only for the purposes of the analysis. Your original source code remains intact.

For instance, to allow use of `restrict` as identifier:

- In the user interface, enter `restrict=my_restrict`.
- On the command line, use the flag `-D restrict=my_restrict`.

## Command-Line Information

You can specify only one flag with each `-D` option. However, you can specify the option multiple times.

**Parameter:** `-D`

**No Default**

**Value:** *flag=value*

**Example:** `polyspace-bug-finder-nodesktop -D HAVE_MYLIB -D int32_t=int`

## See Also

Disabled preprocessor definitions (`-U`)

## Topics

“Specify Polyspace Analysis Options”

## Disabled preprocessor definitions (-U)

Undefine macros in preprocessed code

### Description

Undefine macros in preprocessed code.

### Set Option

**User interface:** In your project configuration, the option is on the **Macros** node.

**Command line:** Use the option -U. See “Command-Line Information” on page 1-68.

### Why Use This Option

Use this option to emulate your compiler behavior. For instance, if your compiler considers a macro `_WIN32` as undefined when you build your code, it executes code in a `#ifndef _WIN32` statement. If Polyspace considers that macro as defined, you must explicitly undefine the macro.

Some settings for Compiler (-compiler) enable certain macros by default. This option allows you undefine the macros.

Typically, you recognize from compilation errors that a certain macro must be undefined. For instance, the following code does not compile if the macro `_WIN32` is defined.

```
#ifndef _WIN32
    int env_var;
#endif

void set() {
    env_var=1;
}
```

The error message states that `env_var` is undefined. However, the definition of `env_var` is in the `#ifndef _WIN32` statement. The underlying cause for the error is that the macro `_WIN32` is defined. You must undefine `_WIN32`.

## Settings

### No Default

Using the  button, add a new row for each macro being undefined.

## Command-Line Information

You can specify only one flag with each `-U` option. However, you can specify the option multiple times.

**Parameter:** `-U`

**No Default**

**Value:** *macro*

**Example:** `polyspace-bug-finder-nodesktop -U HAVE_MYLIB -U USE_COM1`

## See Also

Preprocessor definitions (`-D`)

## Topics

“Specify Polyspace Analysis Options”

# Code from DOS or Windows file system (-dos)

Consider that file paths are in MS-DOS style

## Description

Specify that DOS or Windows files are provided for analysis.

## Set Option

**User interface:** In your project configuration, the option is on the **Environment Settings** node.

**Command line:** Use the option `-dos`. See “Command-Line Information” on page 1-70.

## Why Use This Option

Use this option if the contents of the **Include** or **Source** folder come from a DOS or Windows file system. The option helps you resolve case sensitivity and control character issues.

## Settings

On (default)

Analysis understands file names and include paths for Windows/DOS files

For example, with this option,

```
#include "..\mY_TEst.h"^M
```

```
#include "..\mY_other_FILE.H"^M
```

resolves to:

```
#include "../my_test.h"
```

```
#include "../my_other_file.h"
```

In this mode, you see an error if your include folder has header files whose names differ only in case.

Off

Characters are not controlled for files names or paths.

## Command-Line Information

**Parameter:** -dos

**Default:** Off

**Example:** polyspace-bug-finder-nodesktop -dos -I ./  
my\_copied\_include\_dir -D test=1

## See Also

### Topics

"Specify Polyspace Analysis Options"

# Stop analysis if a file does not compile (-stop-if-compile-error)

Specify that a compilation error must stop the analysis

## Description

Specify that even a single compilation error must stop the analysis.

## Set Option

**User interface:** In the **Configuration** pane, the option is on the **Environment Settings** node.

**Command line:** Use the option `-stop-if-compile-error`. See “Command-Line Information” on page 1-72.

## Why Use This Option

Use this option to first resolve all compilation errors and then perform the Polyspace analysis. This sequence ensures that all files are analyzed.

Otherwise, only files without compilation errors are fully analyzed. The analysis might return some results for files that do not compile. If a file with compilation errors contains a function definition, the analysis considers the function undefined. This assumption can sometimes make the analysis less precise.

The option is more useful for a Code Prover analysis because the Code Prover run-time checks rely more heavily on range propagation across functions.

## Settings

On

The analysis stops even if a single compilation error occurs.

You see the compilation errors on the **Output Summary** pane.

Type	Message	File	Line	Col
	C verification starts at Thu Dec 17 22:26:17 2015			
	6 core(s) detected but the verification uses 4 core(s).			
	identifier "x" is undefined	my_file.c	1	
	Failed compilation.	my_file.c		
	Verifier has detected compilation error(s) in the code.			
	Exiting because of previous error			

For information on how to resolve the errors, see “Troubleshoot Compilation and Linking Errors” (Polyspace Code Prover).

Despite compilation errors, you can see some analysis results, for instance, coding rule violations.

Off (default)

The analysis does not stop because of compilation errors, but only files without compilation errors are analyzed. The analysis does not consider files that do not compile. If a file with compilation errors contains a function definition, the analysis considers the function undefined. If the analysis needs the definition of such a function, it makes broad assumptions about the function.

- The function return value can take any value in the range allowed by its data type.
- The function can modify arguments passed by reference so that they can take any value in the range allowed by their data types.

If the assumptions are too broad, the analysis can be less precise. For instance, a runtime check can flag an operation in orange even though it does not fail in practice.

If compilation errors occur, the **Dashboard** pane has a link, which shows that some files failed to compile. You can click the link and see the compilation errors on the **Output Summary** pane.

## Command-Line Information

**Parameter:** -stop-if-compile-error

**Default:** Off

**Example:** polyspace-bug-finder-nodesktop -sources *filename* -stop-if-compile-error

## **See Also**

### **Topics**

“Specify Polyspace Analysis Options”

**Introduced in R2017a**

## Command/script to apply to preprocessed files (-post-preprocessing-command)

Specify command or script to run on source files after preprocessing phase of analysis

### Description

Specify a command or script to run on each source file after preprocessing.

### Set Option

**User interface:** In your project configuration, the option is on the **Environment Settings** node.

**Command line:** Use the option `-post-preprocessing-command`. See “Command-Line Information” on page 1-76.

### Why Use This Option

You can run scripts on preprocessed files to work around compilation errors or imprecisions of the analysis while keeping your original source files untouched. For instance, suppose Polyspace does not recognize a compiler-specific keyword. If you are certain that the keyword is not relevant for the analysis, you can run a Perl script to remove all instances of the keyword. When you use this option, the software removes the keyword from your preprocessed code but keeps your original code untouched.

Use a script only if the existing analysis options do not meet your requirements. For instance:

- For direct replacement of one keyword with another, use the option `Preprocessor definitions (-D)`.

However, the option does not allow search and replacement involving regular expressions. For regular expressions, use a script.

- For mapping your library function to a standard library function, use the option `function-behavior-specifications`.

However, the option supports mapping to only a subset of standard library functions. To map to an unsupported function, use a script.

*If you are unsure about removing or replacing an unsupported construct, do not use this option. Contact MathWorks Support for guidance.*

## Settings

### No Default

Enter full path to the command or script or click  to navigate to the location of the command or script. This script is executed before verification.

## Tips

- Your script must be designed to process the standard output from preprocessing and produce its results in accordance with that standard output.
- Your script must preserve the number of lines in the preprocessed file. In other words, it must not add or remove entire lines to or from the file.

Adding a line or removing one can potentially result in some unpredictable behavior on the location of checks and macros in the Polyspace user interface.

- For a Perl script, in Windows, specify the full path to the Perl executable followed by the full path to the script.

For example:

- To specify a Perl command that replaces all instances of the `far` keyword, enter `matlabroot\sys\perl\win32\bin\perl.exe -p -e "s/far//g"`.
- To specify a Perl script `replace_keyword.pl` that replaces all instances of a keyword, enter `matlabroot\sys\perl\win32\bin\perl.exe absolute_path\replace_keyword.pl`.

Here, `matlabroot` is the location of the current MATLAB installation such as `C:\Program Files\MATLAB\R2015b\` and `absolute_path` is the location of the Perl script. If the paths contain spaces, use quotes to enclose the full path names.

- Use this Perl script as template. The script removes all instances of the `far` keyword.

```
#!/usr/bin/perl

binmode STDOUT;

# Process every line from STDIN until EOF
while ($line = <STDIN>)
{
    # Remove far keyword
    $line =~ s/far//g;

    # Print the current processed line to STDOUT
    print $line;
}
```

You can use Perl regular expressions to perform substitutions. For instance, you can use the following expressions.

Expression	Meaning
.	Matches any single character except newline
[a-z0-9]	Matches any single letter in the set a - z, or digit in the set 0 - 9
[^a-e]	Matches any single letter not in the set a - e
\d	Matches any single digit
\w	Matches any single alphanumeric character or _
x?	Matches 0 or 1 occurrence of x
x*	Matches 0 or more occurrences of x
x+	Matches 1 or more occurrences of x

For complete list of regular expressions, see Perl documentation.

- When you specify this option, the Compilation Assistant is automatically disabled.

## Command-Line Information

**Parameter:** `-post-preprocessing-command`

**Value:** Path to executable file or command in quotes

### No Default

**Example in Linux®:** polyspace-bug-finder-nodesktop -sources *file\_name* -post-preprocessing-command `pwd`/replace\_keyword.pl

**Example in Windows:** polyspace-bug-finder-nodesktop -sources *file\_name* -post-preprocessing-command "C:\Program Files\MATLAB\R2015b\sys\perl\win32\bin\perl.exe" "C:\My\_Scripts\replace\_keyword.pl"

## See Also

-regex-replace-rgx -regex-replace-fmt | Command/script to apply after the end of the code verification (-post-analysis-command)

## Topics

"Specify Polyspace Analysis Options"

## Include (-include)

Specify files to be `#include`-ed by each C file in analysis

### Description

Specify files to be `#include`-ed by each C file involved in the analysis. The software enters the `#include` statements in the preprocessed code used for analysis, but does not modify the original source code.

### Set Option

**User interface:** In your project configuration, the option is on the **Environment Settings** node.

**Command line:** Use the option `-include`. See “Command-Line Information” on page 1-79.

### Why Use This Option

There can be many reasons why you want to `#include` a file in all your source files.

For instance, you can collect in one header file all workarounds for compilation errors. Use this option to provide the header file for analysis. Suppose you have compilation issues because Polyspace does not recognize certain compiler-specific keywords. To work around the issues, `#define` the keywords in a header file and provide the header file with this option.

### Settings

#### No Default

Specify the file name to be included in every file involved in the analysis.

Polyspace still acts on other directives such as `#include <include_file.h>`.

## Command-Line Information

**Parameter:** -include

**Default:** None

**Value:** *file* (Use -include multiple times for multiple files)

**Example:** polyspace-bug-finder-nodesktop -include `pwd`/sources/  
a\_file.h -include /inc/inc\_file.h

## See Also

### Topics

“Gather Compilation Options Efficiently”

“Specify Polyspace Analysis Options”

## Include folders (-I)

View include folders used for analysis

### Description

View the include folders used for analysis.

### Set Option

This is not an option that you set in your project configuration. You can only view the include folders in the configuration associated with a result. For instance, in the user interface:

- To add include folders, on the **Project Browser**, right-click your project. Select **Add Source**.
- To view the include folders that you used, with your results open, select **Window > Show/Hide View > Configuration**. Under the node **Environment Settings**, you see the folders listed under **Include folders**.

### Settings

This is a read-only option available only when viewing results. Unlike other options, you do not specify include folders on the **Configuration** pane. Instead, you add your include folders on the **Project Browser** pane.

### Command-Line Information

**Parameter:** -I

**Value:** Folder name

**Example:** polyspace-bug-finder-nodesktop -I /com1/inc -I /com1/sys/inc

## See Also

-I | Include (-include)

## Constraint setup (-data-range-specifications)

Constrain global variables, function inputs and return values of stubbed functions

### Description

*This option applies primarily to a Code Prover analysis. In Bug Finder, you can only specify external constraints on global variables.*

Specify constraints (also known as data range specifications or DRS) for global variables, function inputs and return values of stubbed functions using a **Constraint Specification** template file. The template file is an XML file that you can generate in the Polyspace user interface.

### Set Option

**User interface:** In your project configuration, the option is on the **Inputs & Stubbing** node.

**Command line:** Use the option `-data-range-specifications`. See “Command-Line Information” on page 1-83.

### Why Use This Option

Use this option for specifying constraints outside your code.

Polyspace uses the code that you provide to make assumptions about items such as variable ranges and allowed buffer size for pointers. Sometimes the assumptions are broader than what you expect because:

- You have not provided the complete code. For example, you did not provide some of the function definitions.
- Some of the information about variables is available only at run time. For example, some variables in your code obtain values from the user at run time.

Because of these broad assumptions:

- Code Prover can consider more execution paths than those paths that occur at run time. If an operation fails along one of the execution paths, Polyspace places an orange check on the operation. If that execution path does not occur at run time, the orange check indicates a false positive.
- Bug Finder can sometimes produce false positives.

To reduce the number of such false positives, you can specify additional constraints on global variables, function inputs, and return values of stubbed functions.

After you specify your constraints, you can save them as an XML file to use them for subsequent analyses. If your source code changes, you can update the previous constraints. You do not have to create a new constraint template.

## Settings

### No Default

Enter full path to the template file. Alternately, click  to open a **Constraint Specification** wizard. This wizard allows you to generate a template file or navigate to an existing template file.

For more information, see “Specify External Constraints”.

## Command-Line Information

**Parameter:** -data-range-specifications

**Value:** *file*

**No Default**

**Example:** polyspace-bug-finder-nodesktop -sources *file\_name* -data-range-specifications "C:\DRS\range.xml"

## See Also

Functions to stub (-functions-to-stub)

## Topics

“Specify Polyspace Analysis Options”

“Specify External Constraints”

## Ignore default initialization of global variables (-no-def-init-glob)

Consider global variables as uninitialized

### Description

*This option applies to Code Prover only. It does not affect a Bug Finder analysis.*

Specify that Polyspace must not consider global and static variables as initialized.

### Set Option

**User interface:** In your project configuration, the option is on the **Inputs & Stubbing** node.

**Command line:** Use the option `-no-def-init-glob`. See “Command-Line Information” on page 1-86.

### Why Use This Option

The C99 Standard specifies that global variables are implicitly initialized. The default analysis follows the Standard and considers this implicit initialization.

If you want to initialize specific global variables explicitly, use this option to find the instances where global variables are not explicitly initialized.

### Settings

On

Polyspace ignores implicit initialization of global and static variables. The verification generates a red **Non-initialized variable** error if your code reads a global or static variable before writing to it.

Off (default)

Polyspace considers global variables and static variables to be initialized according to C99 or ISO C++ standards. For instance, the default values are:

- 0 for `int`
- 0 for `char`
- 0.0 for `float`

## Tips

- If you initialize a global variable using the generated `main`:
  - Polyspace does not produce a red **Non-initialized variable** error if your code reads the variable before writing to it. The error is not produced even if you turn on the option **Ignore default initialization of global variables**.
  - Polyspace considers that before the first write operation on the variable in a function, the variable can take any value allowed by its type.

For more information on initializing global variables using the generated `main`, see `Variables to initialize (-main-generator-writes-variables)`.

- Static local variables have the same lifetime as global variables even though their visibility is limited to the function where they are defined. Therefore, the option applies to static local variables.

## Command-Line Information

**Parameter:** `-no-def-init-glob`

**Default:** Off

## See Also

### Topics

“Specify Polyspace Analysis Options”

## No STL stubs (-no-stl-stubs)

Do not use Polyspace implementations of functions in the Standard Template Library

### Description

*This option applies to Code Prover only. It does not affect a Bug Finder analysis.*

Specify that the verification must not use Polyspace implementations of the Standard Template Library.

### Set Option

**User interface:** In your project configuration, the option is on the **Inputs & Stubbing** node. See “Dependency” on page 1-88 for other options that you must also enable.

**Command line:** Use the option `-no-stl-stubs`. See “Command-Line Information” on page 1-88.

### Why Use This Option

The analysis uses an efficient implementation of all class templates from the Standard Template Library (STL). If your compiler redefines the templates, in some cases, your compiler implementation can conflict with the Polyspace implementation.

Use this option to prevent Polyspace from using its implementations of STL templates. You must also explicitly provide the path to your compiler includes. See “C++ Standard Template Library Stubbing Errors” (Polyspace Code Prover).

### Settings

On

The verification does not use Polyspace implementations of the Standard Template Library.

Off (default)

The verification uses efficient Polyspace implementations of the Standard Template Library.

## Dependency

This option is available only if you set `Source code language (-lang)` to `CPP` or `C-CPP`.

## Command-Line Information

**Parameter:** `-no-stl-stubs`

**Default:** Off

## See Also

# Functions to stub (-functions-to-stub)

Specify functions to stub during analysis

## Description

*This option applies primarily to a Code Prover analysis.*

Specify functions to stub during analysis.

For specified functions, Polyspace :

- Ignores the function definition even if it exists.
- Assumes that the function inputs and outputs have full range of values allowed by their type.

## Set Option

**User interface:** In your project configuration, the option is on the **Inputs & Stubbing** node.

**Command line:** Use the option `-functions-to-stub`. See “Command-Line Information” on page 1-91.

## Why Use This Option

If you want the analysis to ignore the code in a function body, you can stub the function.

For instance:

- Suppose you have not completed writing the function and do not want the analysis to consider the function body. You can use this option to stub the function and then specify constraints on its return value and modifiable arguments.
- Suppose the analysis of a function body is imprecise. The analysis assumes that the function returns all possible values that the function return type allows. You can use this option to stub the function and then specify constraints on its return value.

## Settings

### No Default

Enter function names or choose from a list.

- Click  to add a field and enter the function name.
- Click  to list functions in your code. Choose functions from the list.

When entering function names, use either the basic syntax or, to differentiate overloaded functions, the argument syntax. For the argument syntax, separate function arguments with semicolons. See the following code and table for examples.

```
//simple function
void test(int a, int b);

//C++ template function
Template <class myType>
myType test(myType a, myType b);

//C++ class method
class A {
    public:
    int test(int var1, int var2);
};

//C++ template class method
template <class myType> class A
{
    public:
    myType test(myType var1, myType var2);
};
```

Function Type	Basic Syntax	Argument Syntax
Simple function	test	test(int; int)

Function Type	Basic Syntax	Argument Syntax
C++ template function	test	test(myType; myType)
C++ class method	A::test	A::test(int;int)
C++ template class method	A<myType>::test	A<myType>::test(myType;myType)

## Command-Line Information

**Parameter:** -functions-to-stub

**No Default**

**Value:** *function1[,function2[,...]]*

**Example:** polyspace-bug-finder-nodesktop -sources *file\_name* -functions-to-stub *function\_1,function\_2*

## See Also

Constraint setup (-data-range-specifications)

## Topics

“Specify Polyspace Analysis Options”

## Generate stubs for Embedded Coder lookup tables (-stub-embedded-coder-lookup-table-functions)

Stub autogenerated functions that use lookup tables and model them more precisely

### Description

*This option is available only for model-generated code. The option is relevant only if you generate code from a Simulink® model that uses Lookup Table blocks using MathWorks code generation products.*

Specify that the verification must stub autogenerated functions that use certain kinds of lookup tables in their body. The lookup tables in these functions use linear interpolation and do not allow extrapolation. That is, the result of using the lookup table always lies between the lower and upper bounds of the table.

### Set Option

If you are running verification from Simulink, use the option “Stub lookup tables” (Polyspace Code Prover) in Simulink Configuration Parameters, which performs the same task.

**User interface:** In your Polyspace project configuration, the option is on the **Inputs & Stubbing** node.

**Command line:** Use the option `-stub-embedded-coder-lookup-table-functions`. See “Command-Line Information” on page 1-94.

### Why Use This Option

If you use this option, the verification is more precise and has fewer orange checks. The verification of lookup table functions is usually imprecise. The software has to make certain assumptions about these functions. To avoid missing a run-time error, the verification assumes that the result of using the lookup table is within the full range

allowed by the result data type. This assumption can cause many unproven results (orange checks) when a lookup table function is called. By using this option, you narrow down the assumption. For functions that use lookup tables with linear interpolation and no extrapolation, the result is at least within the bounds of the table.

The option is relevant only if your model has Lookup Table blocks. In the generated code, the functions corresponding to Lookup Table blocks also use lookup tables. The function names follow specific conventions. The verification uses the naming conventions to identify if the lookup tables in the functions use linear interpolation and no extrapolation. The verification then replaces such functions with stubs for more precise verification.

## Settings

On (default)

For autogenerated functions that use lookup tables with linear interpolation and no extrapolation, the verification:

- Does not check for run-time errors in the function body.
- Calls a function stub instead of the actual function at the function call sites. The stub ensures that the result of using the lookup table is within the bounds of the table.

To identify if the lookup table in the function uses linear interpolation and no extrapolation, the verification uses the function name. In your analysis results, you see that the function is not analyzed. If you place your cursor on the function name, you see the following message:

```
Function has been recognized as an Embedded Coder Lookup-Table function.  
It was stubbed by Polyspace to increase precision.  
Unset the -stub-embedded-coder-lookup-table-functions option to analyze  
the code below.
```

Off

The verification does not stub autogenerated functions that use lookup tables.

## Tips

- The option applies to only autogenerated functions. If you integrate your own C/C++ S-Function using lookup tables with the model, these functions do not follow the naming conventions for autogenerated functions. The option does not cause them to be stubbed. If you want the same behavior for your handwritten lookup table functions as the autogenerated functions, use the option `-function-behavior-specifications` and map your function to the `__ps_lookup_table_clip` function.
- If you run verification from Simulink, the option is on by default. For certification purposes, if you want your verification tool to be independent of the code generation tool, turn off the option.

## Command-Line Information

**Parameter:** `-stub-embedded-coder-lookup-table-functions`

**Default:** On

**Example:** `polyspace-code-prover-nodesktop -sources file_name -stub-embedded-coder-lookup-table-functions`

## See Also

**Introduced in R2016b**

## Generate results for sources and (-generate-results-for)

Specify files on which you want analysis results

### Description

Specify files on which you want analysis results.

### Set Option

**User interface:** In your project configuration, the option is on the **Inputs & Stubbing** node.

**Command line:** Use the option `-generate-results-for`. See “Command-Line Information” on page 1-97.

### Why Use This Option

Use this option to see results in header files that are most relevant to you.

For instance, by default, results are generated on header files that are located in the same folder as the source files. Often, other header files belong to a third-party library. Though these header files are required for a precise analysis, you are not interested in reviewing findings in those headers. Therefore, by default, results are not generated for those headers. If you *are interested* in certain headers from third-party libraries, change the default value of this option.

### Settings

**Default:** source-headers

source-headers

Results appear on source files and header files in the same folder as the source files or in subfolders of source file folders.

The source files are the files that you add to the **Source** folder of your Polyspace project (or use with the argument `-sources` at the command line).

## all-headers

Results appear on source files and all header files. The header files can be in the same folder as source files, in subfolders of source file folders or in include folders.

The source files are the files that you add to the **Source** folder of your Polyspace project (or use with the argument `-sources` at the command line).

The include folders are the folders that you add to the **Include** folder of your Polyspace project (or use with the argument `-I` at the command line).

## custom

Results appear on source files and the files that you specify. If you enter a folder name, results appear on header files in that folder.

Click  to add a field. Enter a file or folder name.

## Tips

- 1 Use this option in combination with appropriate values for the option `Do not generate results for (-do-not-generate-results-for)`.

If you choose `custom` and the values for the two options conflict, the more specific value determines the display of results. For instance, in the following examples, the value for the option **Generate results for sources and** is more specific.

Generate results for sources and	Do not generate results for	Final Result
custom: C:\Includes \Custom_Library\ 	custom: C:\Includes 	Results are displayed on header files in C:\Includes\Custom_Library\ but not generated for other header files in C:\Includes and its subfolders.



## Do not generate results for (-do-not-generate-results-for)

Specify files on which you do not want analysis results

### Description

Specify files on which you do not want analysis results.

### Set Option

**User interface:** In your project configuration, the option is on the **Inputs & Stubbing** node.

**Command line:** Use the option `-do-not-generate-results-for`. See “Command-Line Information” on page 1-102.

### Why Use This Option

Use this option to see results in header files that are most relevant to you.

For instance, by default, results are generated on header files that are located in the same folder as the source files. If you are not interested in reviewing the findings in those headers, change the default value of this option.

### Settings

**Default:** include-folders

include-folders

Results are not generated for header files in include folders.

The include folders are the folders that you add to the **Include** folder of your Polyspace project (or use with the argument `-I` at the command line).

If an include folder is a subfolder of a source folder, results are generated for files in that include folder even if you specify the option value `include-folders`. In this situation, use the option value `custom` and explicitly specify the include folders to ignore.

#### `all-headers`

Results are not generated for all header files. The header files can be in the same folder as source files, in subfolders of source file folders or in include folders.

The source files are the files that you add to the **Source** folder of your Polyspace project (or use with the argument `-sources` at the command line).

The include folders are the folders that you add to the **Include** folder of your Polyspace project (or use with the argument `-I` at the command line).

#### `custom`

Results are not generated for the files that you specify. If you enter a folder name, results are suppressed from files in that folder.

Click  to add a field. Enter a file or folder name.

## Tips

- 1 Use this option appropriately in combination with appropriate values for the option `Generate results for sources and (-generate-results-for)`.

If you choose `custom` and the values for the two options conflict, the more specific value determines the display of results. For instance, in the following examples, the value for the option **Generate results for sources and** is more specific.

Generate results for sources and	Do not generate results for	Final Result
custom: C:\Includes \Custom_Library\	custom: C:\Includes	Results are displayed on header files in C:\Includes\Custom_Library\ but not generated for other header files in C:\Includes and its subfolders.
custom: C:\Includes \my_header.h	custom: C:\Includes\	Results are displayed on the header file my_header.h in C:\Includes\ but not generated for other header files in C:\Includes\ and its subfolders.

Using these two options together, you can suppress results from all files in a certain folder but unsuppress select files in those folders.

- 2 If you choose `all-headers` for this option, results are suppressed from all header files irrespective of what you specify for the option **Generate results for sources and**.
- 3 If a defect or coding rule violation involves two files and you do not generate results for one of the files, the defect or rule violation still appears. For instance, if you define two variables with similar-looking names in files `myFile.cpp` and `myFile.h`, you get a violation of the MISRA® C++ rule 2-10-1, even if you do not generate results for `myFile.h`. MISRA C++ rule 2-10-1 states that different identifiers must be typographically unambiguous.

The following results can involve more than one file:

**MISRA C: 2004 Rules**

- MISRA C: 2004 Rule 5.1 — Identifiers (internal and external) shall not rely on the significance of more than 31 characters.
- MISRA C: 2004 Rule 5.2 — Identifiers in an inner scope shall not use the same name as an identifier in an outer scope, and therefore hide that identifier.

- MISRA C: 2004 Rule 8.8 — An external object or function shall be declared in one file and only one file.
- MISRA C: 2004 Rule 8.9 — An identifier with external linkage shall have exactly one external definition.

### **MISRA C: 2012 Directives and Rules**

- MISRA C: 2012 Directive 4.5 — Identifiers in the same name space with overlapping visibility should be typographically unambiguous.
- MISRA C: 2012 Rule 5.2 — Identifiers declared in the same scope and name space shall be distinct.
- MISRA C: 2012 Rule 5.3 — An identifier declared in an inner scope shall not hide an identifier declared in an outer scope.
- MISRA C: 2012 Rule 5.4 — Macro identifiers shall be distinct.
- MISRA C: 2012 Rule 5.5 — Identifiers shall be distinct from macro names.
- MISRA C: 2012 Rule 8.5 — An external object or function shall be declared once in one and only one file.
- MISRA C: 2012 Rule 8.6 — An identifier with external linkage shall have exactly one external definition.

### **MISRA C++ Rules**

- MISRA C++ Rule 2-10-1 — Different identifiers shall be typographically unambiguous.
- MISRA C++ Rule 2-10-2 — Identifiers declared in an inner scope shall not hide an identifier declared in an outer scope.
- MISRA C++ Rule 3-2-2 — The One Definition Rule shall not be violated.
- MISRA C++ Rule 3-2-3 — A type, object or function that is used in multiple translation units shall be declared in one and only one file.
- MISRA C++ Rule 3-2-4 — An identifier with external linkage shall have exactly one definition.
- MISRA C++ Rule 7-5-4 — Functions should not call themselves, either directly or indirectly.
- MISRA C++ Rule 15-4-1 — If a function is declared with an exception-specification, then all declarations of the same function (in other translation units) shall be declared with the same set of type-ids.

## JSF C++ Rules

- JSF C++ Rule 46 — User-specified identifiers (internal and external) will not rely on significance of more than 64 characters.
- JSF C++ Rule 48 — Identifiers will not differ by only a mixture of case, the presence/absence of the underscore character, the interchange of the letter O with the number 0 or the letter D, the interchange of the letter I with the number 1 or the letter l, the interchange of the letter S with the number 5, the interchange of the letter Z with the number 2 and the interchange of the letter n with the letter h.
- JSF C++ Rule 137 — All declarations at file scope should be static where possible.
- JSF C++ Rule 139 — External objects will not be declared in more than one file.

## Polyspace Bug Finder Defects

- Variable shadowing — Variable hides another variable of same name with nested scope.
  - Declaration mismatch — Mismatch occurs between function or variable declarations.
- 4 If a result (coding rule violation or Bug Finder defect) is inside a macro, Polyspace typically shows the result on the macro definition instead of the macro occurrences so that you review the result only once. Even if the macro is used in a suppressed file, the result is still shown on the macro definition, *if the definition occurs in an unsuppressed file.*

## Command-Line Information

**Parameter:** -do-not-generate-results-for

**Value:** all-headers | include-folders | custom=*file1*[,*file2*[,...]] | *folder1*[,*folder2*[,...]]

**Example:** polyspace-bug-finder-nodesktop -lang c -sources *file\_name* -misra2 required-rules -do-not-generate-results-for "C:\usr\include"

## See Also

### Topics

“Specify Polyspace Analysis Options”

**Introduced in R2016a**

## External multitasking configuration

Enable setup of multitasking configuration from external file definitions

### Description

Specify whether you want to use definitions from external files to set up the multitasking configuration of your Polyspace project. The supported external file formats are:

- ARXML files for AUTOSAR projects
- OIL files for OSEK projects

### Set Option

**User interface:** In the **Configuration** pane, the option is available on the **Multitasking** node.

**Command line:** See “Command-Line Information” on page 1-105.

### Why Use This Option

If your AUTOSAR project includes ARXML files with ECU configuration parameters, or if your OSEK project includes OIL files, Polyspace can parse these files. The software sets up tasks, interrupts, cyclical tasks, and critical sections. You do not have to set them up manually.

### Settings

On

Polyspace parses the external files that you provide in the format that you specify to set up the multitasking configuration of your project.

osek

Look for and parse OIL files to extract multitasking description.

## autosar

Look for and parse AUTOSAR XML files to extract multitasking description.

Off (default)

Polyspace does not set up the multitasking configuration of your project.

## Command-Line Information

There is no single command-line option to turn on external multitasking configuration. By using the `-osek-multitasking` option or the `-autosar-multitasking` option, you enable external multitasking configuration.

## See Also

ARXML files selection (`-autosar-multitasking`) | OIL files selection (`-osek-multitasking`)

## Topics

[“Specify Polyspace Analysis Options”](#)

[“Analyze Multitasking Programs in Polyspace”](#)

[“Configuring Polyspace Multitasking Analysis Manually”](#)

**Introduced in R2018a**

## OIL files selection (-osek-multitasking)

Set up multitasking configuration from OIL file definition

### Description

Specify the OIL files that Polyspace parses to set up the multitasking configuration of your OSEK project.

### Set Option

**User interface:** In the **Configuration** pane, the option is available on the **Multitasking** node. See Dependencies on page 1-109 for other options you must also enable.

**Command line:** Use the option `-osek-multitasking`. See “Command-Line Information” on page 1-110.

### Why Use This Option

If your project includes OIL files, Polyspace can parse these files to set up tasks, interrupts, cyclical tasks, and critical sections. You do not have to set them up manually.

### Settings

On

Polyspace looks for and parses OIL files to set up your multitasking configuration.

auto

Look for OIL files in your project source and include folders, but not in their subfolders.

custom

Look for OIL files on the specified path and the path subfolders. You can specify a path to the OIL files or to the folder containing the files.

When you select this option, in your source code, Polyspace supports these OSEK multitasking keywords:

- TASK
- DeclareTask
- ActivateTask
- DeclareResource
- GetResource
- ReleaseResource
- ISR
- DeclareEvent
- DeclareAlarm

Polyspace parses the OIL files that you provide for TASK, ISR, RESOURCE, and ALARM definitions. The analysis uses these definitions and the supported multitasking keywords to configure tasks, interrupts, cyclical tasks, and critical sections.

### **Example: Analyze Your OSEK Multitasking Project**

This example shows how to set up the multitasking configuration of an OSEK project and run an analysis on this project. To try the steps in this example, use the demo files in the folder *MATLABROOT/help/toolbox/bugfinder/examples/External\_multitasking/OSEK*. *MATLABROOT* is your MATLAB installation folder. The analysis results apply to this example code.

```
#include <assert.h>
#include "include/example_osek_multi.h"

int var1;
int var2;
int var3;

DeclareAlarm(Cyclic_task_activate);
DeclareResource(res1);
DeclareTask(init);
TASK(afterinit1);

TASK(init) // task
{

    var2++;
    ActivateTask(afterinit1);
    var3++;
    GetResource(res1); // critical section begins
    var1++;
    ReleaseResource(res1); // critical section ends
}

TASK(afterinit1) // task
{
    var3++;
    var2++;
    GetResource(res1); // critical section begins
    var1++;
    ReleaseResource(res1); // critical section ends
}

void main()
{}
```

To set up your multitasking configuration and analyze the code:

- 1 Copy the contents of *MATLABROOT/help/toolbox/bugfinder/examples/External\_multitasking/OSEK* to your machine, for instance in C:\Polyspace\_worskpace\OSEK.

- 2 Run an analysis on your OSEK project by using the command:

```
polyspace-bug-finder-nodesktop -sources ^
C:\Polyspace_workspace\OSEK\example_osek_multitasking.c ^
-osek-multitasking auto
```

Polyspace detects a data race on page 3-112 on variable `var3` because of multiple read and write operation from tasks `init` and `afterinit1`.

```
#include <assert.h>
#include "include/example_osek_multi.h"

int var1;
int var2;
int var3;
```

There is no defect on `var2` since `afterinit1` goes to an active state (`ActivateTask()`) after `init` increments `var2`. Similarly, there is no defect on `var1` because it is protected by the `GetResource()` and `ReleaseResource()` calls.

To see how Polyspace models the `TASK`, `ISR`, and `RESOURCE` definitions from your OIL files, open the **Concurrency window** from the **Dashboard** pane.

Off (default)

Polyspace does not set up a multitasking configuration for your OSEK project.

## Additional Considerations

- The analysis ignores `TerminateTask()` declarations in your source code and considers that subsequent code is executed.
- Polyspace ignores syntax elements of your OIL files that do not follow the syntax defined here.

## Dependencies

To enable this option in the user interface, first select the option `External multitasking configuration`.

## Command-Line Information

**Parameter:** -osek-multitasking

**Value:** auto | custom='file1 [,file2, dir1,...]'

**Default:** Off

**Example:** polyspace-bug-finder-nodesktop -sources *source\_path* -I *include\_path* -osek-multitasking custom='path\to\file1.oil, path\to\dir'

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

**Introduced in R2017b**

# ARXML files selection (-autosar-multitasking)

Set up multitasking configuration from ARXML file definitions

## Description

*To detect data races in large AUTOSAR applications, use this option with Polyspace Bug Finder.*

Specify the ARXML files that Polyspace parses to set up the multitasking configuration of your AUTOSAR project.

## Set Option

**User interface:** In the **Configuration** pane, the option is available on the **Multitasking** node. See Dependencies on page 1-112 for other options you must also enable.

**Command line:** Use the option `-autosar-multitasking`. See “Command-Line Information” on page 1-110.

## Why Use This Option

If your project includes ARXML files with `<ECUC-CONTAINER-VALUE>` elements, Polyspace can parse these files to set up tasks, interrupts, cyclical tasks, and critical sections. You do not have to set them up manually.

## Settings

On

Polyspace looks for and parses ARXML files to set up your multitasking configuration.

When you select this option, the software assumes that you use the OSEK multitasking API in your source code to declare and define tasks and interrupts. Polyspace supports these OSEK multitasking keywords:

- TASK
- DeclareTask
- ActivateTask
- DeclareResource
- GetResource
- ReleaseResource
- ISR
- DeclareEvent
- DeclareAlarm

Polyspace parses the ARXML files that you provide for `OsTask`, `OsIsr`, `OsResource`, `OsAlarm`, and `OsEvent` definitions. The analysis uses these definitions and the supported multitasking keywords to configure tasks, interrupts, cyclical tasks, and critical sections.

To see how Polyspace models the `OsTask`, `OsIsr`, and `OsResource` definitions from your ARXML files, open the **Concurrency window** from the **Dashboard** pane. In that window, under the **Entry points** column, the names of the elements are extracted from their `<SHORT-NAME>` values in the ARXML files.

Off (default)

Polyspace does not set up a multitasking configuration for your AUTOSAR project.

### Additional Considerations

- The analysis ignores `TerminateTask()` declarations in your source code and considers that subsequent code is executed.
- Polyspace supports multitasking configuration only from ARXML files for AUTOSAR specification version 4.0 and later.

### Dependencies

To enable this option in the user interface, first select the option **External multitasking configuration**.

## Command-Line Information

**Parameter:** -autosar-multitasking

**Value:** *file1* [, *file2*, *dir1*, ...]

**Default:** Off

**Example:** polyspace-bug-finder-nodesktop -sources *source\_path* -I *include\_path* -autosar-multitasking C:\Polyspace\_Workspace\AUTOSAR\myFile.arxml

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

**Introduced in R2018a**

## Configure multitasking manually

Consider that code is intended for multitasking

### Description

Specify whether your code is a multitasking application. This option allows you to manually configure the multitasking structure for Polyspace.

### Set Option

**User interface:** In your project configuration, the option is available on the **Multitasking** node.

**Command line:** See “Command-Line Information” on page 1-115.

### Why Use This Option

In cases where automatic concurrency detection is not supported, you can explicitly specify your multitasking model by using this option. Once you select this option, you can explicitly specify your entry point functions, cyclic tasks, interrupts and protection mechanisms for shared variables, such as critical section details.

The analysis uses your specifications to look for concurrency defects. For more information, see “Concurrency Defects”.

### Settings

On

The code is intended for a multitasking application.

Off (default)

The code is not intended for a multitasking application.

## Tips

If you run a file by file verification in Code Prover, your multitasking options are ignored. See `Verify files independently (-unit-by-unit)`.

## Command-Line Information

There is no single command-line option to turn on multitasking analysis. By using the `-entry-points` option, you turn on multitasking analysis.

## See Also

`Tasks (-entry-points)` | `Critical section details (-critical-section-begin -critical-section-end)` | `Temporally exclusive tasks (-temporal-exclusions-file)`

## Topics

[“Specify Polyspace Analysis Options”](#)

[“Analyze Multitasking Programs in Polyspace”](#)

[“Configuring Polyspace Multitasking Analysis Manually”](#)

## Enable automatic concurrency detection for Code Prover (-enable-concurrency-detection)

Automatically detect certain families of multithreading functions

### Description

*This option affects a Code Prover analysis only.*

Specify whether to use the automatic concurrency detection for POSIX<sup>®</sup>, VxWorks<sup>®</sup>, Windows, and  $\mu$ C/OS II multithreading functions.

### Set Option

**User interface:** In your project configuration, the option is available on the **Multitasking** node. See “Dependencies” (Polyspace Code Prover) for other options that you must enable or disable.

**Command line:** Use the option `-enable-concurrency-detection`. See “Command-Line Information” on page 1-117.

### Why Use This Option

If you use this option, Polyspace determines your multitasking model from your use of multithreading functions.

In some cases, using automatic concurrency detection can slow down the Code Prover analysis. In those cases, you can explicitly specify your multitasking model using the option `Configure multitasking manually`.

## Settings

On

If you use POSIX, VxWorks, Windows,  $\mu$ C/OS II, or C++11 functions for multitasking, the analysis automatically detects your multitasking model from your code.

For a list of supported multitasking functions and limitations in auto-detection of threads, see “Auto-Detection of Thread Creation and Critical Section in Polyspace”.

Off (default)

The analysis does not attempt to detect the multitasking model from your code.

If you want to manually configure your multitasking model, see [Configure multitasking manually](#).

## Dependencies

If you enable this option, your code must contain a `main` function. You cannot use the Code Prover options (Polyspace Code Prover) to generate a `main`.

## Command-Line Information

**Parameter:** `-enable-concurrency-detection`

**Default:** Off

**Example:** `polyspace-code-prover-nodesktop -sources file_name -enable-concurrency-detection`

## See Also

Tasks (`-entry-points`) | Critical section details (`-critical-section-begin` `-critical-section-end`) | Temporally exclusive tasks (`-temporal-exclusions-file`)

## Topics

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

“Auto-Detection of Thread Creation and Critical Section in Polyspace”

# Tasks (-entry-points)

Specify functions that serve as tasks to your multitasking application

## Description

Specify functions that serve as tasks to your code. If the function does not exist, the verification warns you and continues the verification.

## Set Option

**User interface:** In your project configuration, the option is available on the **Multitasking** node. See “Dependencies” on page 1-120 for other options you must also enable.

**Command line:** Use the option `-entry-points`. See “Command-Line Information” on page 1-120.

## Why Use This Option

Use this option when your code is intended for multitasking.

To specify cyclic tasks and interrupts, use the options `Cyclic tasks (-cyclic-tasks)` and `Interrupts (-interrupts)`. Use this option to specify other tasks.

The analysis uses your specifications to look for concurrency defects. For more information, see “Concurrency Defects”.

## Settings

### No Default

Enter function names or choose from a list.

- Click  to add a field and enter the function name.

- Click  to list functions in your code. Choose functions from the list.

## Dependencies

To enable this option, first select the option `Configure multitasking manually`.

## Tips

If you specify a function as a task, you must provide its definition. Otherwise, the analysis does not consider the function as a task.

## Command-Line Information

**Parameter:** `-entry-points`

**No Default**

**Value:** `function1[,function2[,...]]`

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -entry-points func_1,func_2`

## See Also

Critical section details (`-critical-section-begin -critical-section-end`) | Temporally exclusive tasks (`-temporal-exclusions-file`)

## Topics

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

“Configuring Polyspace Multitasking Analysis Manually”

# Cyclic tasks (-cyclic-tasks)

Specify functions that represent cyclic tasks

## Description

Specify functions that represent cyclic tasks. The analysis assumes that operations in the function body:

- Can execute any number of times.
- Can be interrupted by noncyclic Tasks on page 1-119, other cyclic tasks and interrupts on page 1-124.

To model a cyclic task that cannot be interrupted by other cyclic tasks, specify the task as nonpreemptable. See `-non-preemptable-tasks`.

## Set Option

**User interface:** In your project configuration, the option is available on the **Multitasking** node. See “Dependencies” on page 1-122 for other options you must also enable.

**Command line:** Use the option `-cyclic-tasks`. See “Command-Line Information” on page 1-122.

## Why Use This Option

Use this option to specify cyclic tasks in your multitasking code. The functions that you specify must have the prototype:

```
void function_name(void);
```

The analysis uses your specifications to look for concurrency defects. For the **Data race** defect, the software establishes the following relations between preemptable tasks and other tasks.

- *Data race between two preemptable tasks:*

Unless protected, two operations in different preemptable tasks can interfere with each other. If the operations use the same shared variable without protection, a data race can occur.

If both operations are atomic, to see the defect, you have to enable `Data race including atomic operations`.

- *Data race between a preemptable task and a nonpreemptable task or interrupt:*
  - An atomic operation in a preemptable task cannot interfere with an operation in a nonpreemptable task or an interrupt. Even if the operations use the same shared variable without protection, a data race cannot occur.
  - A nonatomic operation in a preemptable task also cannot interfere with an operation in a nonpreemptable task or an interrupt. However, the latter operation can interrupt the former. Therefore, if the operations use the same shared variable without protection, a data race can occur.

For more information, see “Concurrency Defects”.

## Settings

### No Default

Enter function names or choose from a list.

- Click  to add a field and enter the function name.
- Click  to list functions in your code. Choose functions from the list.

## Dependencies

To enable this option, first select the option `Configure multitasking manually`.

## Command-Line Information

**Parameter:** `-cyclic-tasks`

**No Default**

**Value:** *function1[,function2[,...]]*

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -cyclic-tasks func_1,func_2`

## See Also

-preemptable-interrupts | -non-preemptable-tasks | Interrupts (-interrupts) | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file)

## Topics

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

“Configuring Polyspace Multitasking Analysis Manually”

“Protections for Shared Variables in Multitasking Code”

**Introduced in R2016b**

## Interrupts (-interrupts)

Specify functions that represent nonpreemptable interrupts

### Description

Specify functions that represent nonpreemptable interrupts. The analysis assumes that operations in the function body:

- Can execute any number of times.
- Cannot be interrupted by noncyclic Tasks on page 1-119, cyclic tasks on page 1-121 or other interrupts.

To model an interrupt that can be interrupted by other interrupts, specify the interrupt as preemptable. See `-preemptable-interrupts`.

### Set Option

**User interface:** In your project configuration, the option is available on the **Multitasking** node. See “Dependencies” on page 1-125 for other options you must also enable.

**Command line:** Use the option `-interrupts`. See “Command-Line Information” on page 1-126.

### Why Use This Option

Use this option to specify interrupts in your multitasking code. The functions that you specify must have the prototype:

```
void function_name(void);
```

The analysis uses your specifications to look for concurrency defects. For the **Data race** defect, the analysis establishes the following relations between interrupts and other tasks:

- *Data race between two interrupts:*

Two operations in different interrupts cannot interfere with each other (unless one of the interrupts is preemptable). Even if the operations use the same shared variable without protection, a data race cannot occur.

- *Data race between an interrupt and another task:*
  - An operation in an interrupt cannot interfere with an atomic operation in any other task. Even if the operations use the same shared variable without protection, a data race cannot occur.
  - An operation in an interrupt can interfere with a nonatomic operation in any other task unless the other task is also a nonpreemptable interrupt. Therefore, if the operations use the same shared variable without protection, a data race can occur.

See “Concurrency Defects”.

## Settings

### No Default

Enter function names or choose from a list.

- Click  to add a field and enter the function name.
- Click  to list functions in your code. Choose functions from the list.

## Dependencies

To enable this option, first select the option `Configure multitasking manually`.

## Tips

If you specify a function as an interrupt, you must provide its definition. Otherwise, the analysis does not consider the function as an interrupt.

## Command-Line Information

**Parameter:** -interrupts

**No Default**

**Value:** *function1[,function2[,...]]*

**Example:** polyspace-bug-finder-nodesktop -sources *file\_name* -  
interrupts func\_1,func\_2

## See Also

-preemptable-interrupts | -non-preemptable-tasks | Cyclic tasks (-cyclic-tasks) | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file)

## Topics

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

“Configuring Polyspace Multitasking Analysis Manually”

“Protections for Shared Variables in Multitasking Code”

**Introduced in R2016b**

# Disabling all interrupts (-routine-disable-interrupts -routine-enable-interrupts)

Specify routines that disable and reenable interrupts.

## Description

*This option affects a Bug Finder analysis only.*

Specify a routine that disables all interrupts and a routine that reenables all interrupts.

## Set Option

**User interface:** In your project configuration, the option is available on the **Multitasking** node. See “Dependencies” on page 1-128 for other options you must also enable.

**Command line:** Use the option `-routine-disable-interrupts` and `-routine-enable-interrupts`. See “Command-Line Information” on page 1-129.

## Why Use This Option

The analysis uses the information to look for data race defects. For instance, in the following code, the function `disable_all_interrupts` disables all interrupts until the function `enable_all_interrupts` is called. Even if `task`, `isr1` and `isr2` run concurrently, the operations `x=0` or `x=1` cannot interrupt the operation `x++`. There are no data race defects.

```
int x;

void isr1() {
    x = 0;
}

void isr2() {
    x = 1;
}
```

```
void task() {
    disable_all_interrupts();
    x++;
    enable_all_interrupts();
}
```

## Settings

### No Default

- In **Disabling routine**, enter the routine that disables all interrupts.
- In **Enabling routine**, enter the routine that reenables all interrupts.

Enter function names or choose from a list.

- Click  to add a field and enter the function name.
- Click  to list functions in your code. Choose functions from the list.

## Dependencies

To enable this option, you must select the option, `Configure multitasking manually`.

## Tips

- The routine that you specify for the option disables preemption by all:
  - Noncyclic Tasks on page 1-119
  - Cyclic tasks on page 1-121
  - Interrupts on page 1-124

In other words, the analysis considers that the body of operations between the disabling routine and the enabling routine is atomic and not interruptible at all.

- Protection via disabling interrupts is conceptually different from protection via critical sections.

In the Polyspace multitasking model, to protect two sections of code *from each other* via critical sections, you have to embed them in the same critical section. In other words, you have to place the two sections between calls to the same lock and unlock function.

For instance, suppose you use critical sections as follows:

```
void isr1() {
    begin_critical_section();
    x = 0;
    end_critical_section();
}

void isr2() {
    x = 1;
}

void task() {
    begin_critical_section();
    x++;
    end_critical_section();
}
```

Here, the operation `x++` is protected from the operation `x=0` in `isr1`, but not from the operation `x=1` in `isr2`. If the function `begin_critical_section` disabled *all interrupts*, calling it before `x++` would have been sufficient to protect it.

Typically, you use one pair of routines in your code to disable and reenable interrupts, but you can have many pairs of lock and unlock functions that implement critical sections.

## Command-Line Information

**Parameter:** -routine-disable-interrupts | -routine-enable-interrupts

**No Default**

**Value:** *function\_name*

**Example:** polyspace-bug\_finder-nodesktop -sources *file\_name* -routine-disable-interrupts atomic\_section\_begins -routine-enable-interrupts atomic\_section\_ends

## **See Also**

Configure multitasking manually | Tasks (-entry-points) | Temporally exclusive tasks (-temporal-exclusions-file) | Data race | Data race including atomic operations

## **Topics**

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

**Introduced in R2017a**

## Critical section details (-critical-section-begin -critical-section-end)

Specify functions that begin and end critical sections

### Description

When verifying multitasking code, Polyspace considers that a critical section lies between calls to a lock function and an unlock function.

```
lock();  
/* Critical section code */  
unlock();
```

Specify the lock and unlock function names for your critical sections (for instance, `lock()` and `unlock()` in above example).

### Set Option

**User interface:** In your project configuration, the option is available on the **Multitasking** node. See “Dependencies” on page 1-132 for other options you must also enable.

**Command line:** Use the option `-critical-section-begin` and `-critical-section-end`. See “Command-Line Information” on page 1-133.

### Why Use This Option

When a task `my_task` calls a lock function `my_lock`, other tasks calling `my_lock` must wait till `my_task` calls the corresponding unlock function. Therefore, critical section operations in the other tasks cannot interrupt critical section operations in `my_task`.

For instance, the operation `var++` in `my_task1` and `my_task2` cannot interrupt each other.

```
int var;
```

```
void my_task1() {
    my_lock();
    var++;
    my_unlock();
}

void my_task2() {
    my_lock();
    var++;
    my_unlock();
}
```

The analysis uses the critical section information to look for concurrency defects such as data race and deadlock. See “Concurrency Defects”.

## Settings

### No Default

Click  to add a field.

- In **Starting routine**, enter name of lock function.
- In **Ending routine**, enter name of unlock function.

Enter function names or choose from a list.

- Click  to add a field and enter the function name.
- Click  to list functions in your code. Choose functions from the list.

## Dependencies

To enable this option, first select the option `Configure multitasking manually`.

## Tips

- You can also use primitives such as the POSIX functions `pthread_mutex_lock` and `pthread_mutex_unlock` to begin and end critical sections. For a list of primitives that Polyspace can detect automatically, see “Auto-Detection of Thread Creation and Critical Section in Polyspace”.
- For function calls that begin and end critical sections, Polyspace ignores the function arguments.

For instance, Polyspace treats the two code sections below as the same critical section.

<b>Starting routine:</b> <code>func_begin</code>	<b>Starting routine:</b> <code>func_begin</code>
<b>Ending routine:</b> <code>func_end</code>	<b>Ending routine:</b> <code>func_end</code>
<pre>void my_task1() {     my_lock(1);     /* Critical section code */     my_unlock(1); }</pre>	<pre>void my_task2() {     my_lock(2);     /* Critical section code */     my_unlock(2); }</pre>

- The functions that begin and end critical sections must be functions. For instance, if you define a function-like macro:

```
#define init() num_locks++
```

You cannot use the macro `init()` to begin or end a critical section.

## Command-Line Information

**Parameter:** `-critical-section-begin` | `-critical-section-end`

**No Default**

**Value:** `function1:cs1[,function2:cs2[,...]]`

**Example:** `polyspace-bug_finder-nodesktop -sources file_name -critical-section-begin func_begin:cs1 -critical-section-end func_end:cs1`

## See Also

Configure multitasking manually | Tasks (-entry-points) | Temporally exclusive tasks (-temporal-exclusions-file) | Data race | Data race including atomic operations

## **Topics**

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

“Configuring Polyspace Multitasking Analysis Manually”

“Protections for Shared Variables in Multitasking Code”

“Define Atomic Operations in Multitasking Code”

# Temporally exclusive tasks (-temporal-exclusions-file)

Specify entry point functions that cannot execute concurrently

## Description

Specify entry point functions that cannot execute concurrently. The execution of the functions cannot overlap with each other.

## Set Option

**User interface:** In your project configuration, the option is available on the **Multitasking** node. See “Dependencies” on page 1-136 for other options you must also enable.

**Command line:** Use the option `-temporal-exclusions-file`. See “Command-Line Information” on page 1-136.

## Why Use This Option

Use this option to implement temporal exclusion in multitasking code.

The analysis uses the temporal exclusion information to look for concurrency defects such as data race. See [Data race](#).

## Settings

### No Default

Click  to add a field. In each field, enter a space-separated list of functions. Polyspace considers that the functions in the list cannot execute concurrently.

Enter the function names manually or choose from a list.

- Click  to add a field and enter the function names.
- Click  to list functions in your code. Choose functions from the list.

## Dependencies

To enable this option, first select the option `Configure multitasking manually`.

## Command-Line Information

For the command-line option, create a temporal exclusions file in the following format:

- On each line, enter one group of temporally excluded tasks.
- Within a line, the tasks are separated by spaces.

**Parameter:** `-temporal-exclusions-file`

**No Default**

**Value:** Name of temporal exclusions file

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -temporal-exclusions-file "C:\exclusions_file.txt"`

## See Also

`Configure multitasking manually` | `Tasks (-entry-points)` | `Critical section details (-critical-section-begin -critical-section-end)` | `Data race` | `Data race including atomic operations`

## Topics

["Specify Polyspace Analysis Options"](#)

["Configuring Polyspace Multitasking Analysis Manually"](#)

["Configuring Polyspace Multitasking Analysis Manually"](#)

["Protections for Shared Variables in Multitasking Code"](#)

# Check MISRA C:2004 (-misra2)

Check for violation of MISRA C:2004 rules

## Description

Specify whether to check for violation of MISRA C:2004 rules. Each value of the option corresponds to a subset of rules to check.

## Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node. See “Dependencies” on page 1-139 for other options that you must also enable.

**Command line:** Use the option `-misra2`. See “Command-Line Information” on page 1-139.

## Why Use This Option

Use this option to specify the subset of MISRA C:2004 rules to check for.

After analysis, the **Results List** pane lists the coding rule violations. On the **Source** pane, for every coding rule violation, Polyspace assigns a  symbol to the keyword or identifier relevant to the violation.

## Settings

**Default:** `required-rules`

`required-rules`

Check required coding rules.

`all-rules`

Check required and advisory coding rules.


## SQ0-subset1

Check only a subset of MISRA C rules. In Polyspace Code Prover™, observing these rules can reduce the number of unproven results. For more information, see “Software Quality Objective Subsets (C:2004)”.

## SQ0-subset2

Check a subset of rules including SQ0-subset1 and some additional rules. In Polyspace Code Prover, observing these rules can further reduce the number of unproven results. For more information, see “Software Quality Objective Subsets (C:2004)”.

## custom

Specify coding rules to check. Click  to create a coding rules file. After creating and saving the file, to reuse it for another project, do one of the following:

- Enter full path to the file in the space provided.
- Click . Click  to load the file.

Format of the custom file:

```
rule number off|on
```

Use # to enter comments in the file. For example:

```
10.5 off # rule 10.5: type conversion  
17.2 on # rule 17.2: pointers
```

If you are writing the coding rules file manually, you can choose to only enter the rules that you want to turn off. When you run an analysis, Polyspace automatically turns on the other rules and populates the file.

## single-unit-rules

Check a subset of rules that apply only to single translation units. These rules are checked in the compilation phase of the analysis.

## system-decidable-rules

Check rules in the single-unit-rules subset and some rules that apply to the collective set of program files. The additional rules are the less complex rules that apply at the integration level. These rules can be checked only at the integration level because the rules involve more than one translation unit. These rules are checked in the compilation and linking phases of the analysis.

## Dependencies

- This option is available only if you set `Source code language (-lang)` to C or C-CPP.

For projects with mixed C and C++ code, the MISRA C:2004 checker analyzes only `.c` files.

- If you set `Source code language (-lang)` to C-CPP, you can activate a C coding rule checker **and** a C++ coding rule checker. When you have both C and C++ coding rule checkers active, to avoid duplicate results, Polyspace does not produce the C coding rules found in the linking phase (such as MISRA C:2012 Rule 8.3).

## Tips

- To reduce unproven results in Polyspace Code Prover:
  - 1 Find coding rule violations in `SQ0-subset1`. Fix your code to address the violations and rerun verification.
  - 2 Find coding rule violations in `SQ0-subset2`. Fix your code to address the violations and rerun verification.
- If you select the option `single-unit-rules` or `system-decidable-rules` and choose to detect coding rule violations only, the analysis can complete quicker than checking other rules. For more information, see “Coding Rule Subsets Checked Early in Analysis”.

## Command-Line Information

**Parameter:** `-misra2`

**Value:** `required-rules | all-rules | SQ0-subset1 | SQ0-subset2 | single-unit-rules | system-decidable-rules | file`

**Default:** `required-rules`

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -misra2 all-rules`

## See Also

Generate results for sources and `(-generate-results-for)`

## **Topics**

“Specify Polyspace Analysis Options”

“Check for Coding Rule Violations”

“Polyspace MISRA C 2004 and MISRA AC AGC Checkers”

“Software Quality Objective Subsets (C:2004)”

# Check MISRA AC AGC (-misra-ac-agc)

Check for violation of MISRA AC AGC rules

## Description

Specify whether to check for violation of rules specified by *MISRA AC AGC Guidelines for the Application of MISRA-C:2004 in the Context of Automatic Code Generation*. Each value of the option corresponds to a subset of rules to check.

## Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node. See “Dependencies” on page 1-143 for other options that you must also enable.

**Command line:** Use the option `-misra-ac-agc`. See “Command-Line Information” on page 1-143.

## Why Use This Option

Use this option to specify the subset of MISRA C:2004 AC AGC rules to check for.

After analysis, the **Results List** pane lists the coding rule violations. On the **Source** pane, for every coding rule violation, Polyspace assigns a ▼ symbol to the keyword or identifier relevant to the violation.

## Settings

**Default:** OBL-rules

OBL-rules

Check required coding rules.

OBL-REC-rules

Check required and recommended rules.

## all-rules

Check required, recommended and readability-related rules.


## SQ0-subset1

Check a subset of rules. In Polyspace Code Prover, observing these rules can reduce the number of unproven results. For more information, see “Software Quality Objective Subsets (AC AGC)”.


## SQ0-subset2

Check a subset of rules including `SQ0-subset1` and some additional rules. In Polyspace Code Prover, observing these rules can further reduce the number of unproven results. For more information, see “Software Quality Objective Subsets (AC AGC)”.

## custom

Specify coding rules to check. Click  to create a coding rules file.

After creating and saving the file, to reuse it for another project, do one of the following:

- Enter full path to the file in the space provided.
- Click . Click  to load the file.

Format of the custom file:

```
rule number off|on
```

Use `#` to enter comments in the file. For example:

```
10.5 off # rule 10.5: type conversion  
17.2 on # rule 17.2: pointers
```

If you are writing the coding rules file manually, you can choose to only enter the rules that you want to turn off. When you run an analysis, Polyspace automatically turns on the other rules and populates the file.

## single-unit-rules

Check a subset of rules that apply only to single translation units. These rules are checked in the compilation phase of the analysis.

## system-decidable-rules

Check rules in the `single-unit-rules` subset and some rules that apply to the collective set of program files. The additional rules are the less complex rules that

apply at the integration level. These rules can be checked only at the integration level because the rules involve more than one translation unit. These rules are checked in the compilation and linking phases of the analysis.

## Dependencies

- This option is available only if you set `Source code language (-lang)` to C or C-CPP.

For projects with mixed C and C++ code, the MISRA AC AGC checker analyzes only `.c` files.

- If you set `Source code language (-lang)` to C-CPP, you can activate a C coding rule checker **and** a C++ coding rule checker. When you have both C and C++ coding rule checkers active, to avoid duplicate results, Polyspace does not produce the C coding rules found in the linking phase (such as MISRA C:2012 Rule 8.3).

## Tips

- To reduce unproven results in Polyspace Code Prover:
  - 1 Find coding rule violations in `SQ0-subset1`. Fix your code to address the violations and rerun verification.
  - 2 Find coding rule violations in `SQ0-subset2`. Fix your code to address the violations and rerun verification.
- If you select the option `single-unit-rules` or `system-decidable-rules` and choose to detect coding rule violations only, the analysis can complete quicker than checking other rules. For more information, see “Coding Rule Subsets Checked Early in Analysis”.

## Command-Line Information

**Parameter:** `-misra-ac-agc`

**Value:** `OBL-rules | OBL-REC-rules | all-rules | SQ0-subset1 | SQ0-subset2 | single-unit-rules | system-decidable-rules | file`

**Default:** `OBL-rules`

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -misra-ac-agc all-rules`

## See Also

Generate results for sources and (-generate-results-for)

## Topics

“Specify Polyspace Analysis Options”

“Check for Coding Rule Violations”

“Polyspace MISRA C 2004 and MISRA AC AGC Checkers”

“MISRA C:2004 and MISRA AC AGC Coding Rules”

“Software Quality Objective Subsets (AC AGC)”

# Check MISRA C:2012 (-misra3)

Check for violations of MISRA C:2012 rules and directives

## Description

Specify whether to check for violations of MISRA C:2012 guidelines. Each value of the option corresponds to a subset of guidelines to check.

## Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node. See “Dependencies” on page 1-147 for other options that you must also enable.

**Command line:** Use the option `-misra3`. See “Command-Line Information” on page 1-148.

## Why Use This Option

Use this option to specify the subset of MISRA C:2012 rules to check for.

After analysis, the **Results List** pane lists the coding rule violations. On the **Source** pane, for every coding rule violation, Polyspace assigns a ▼ symbol to the keyword or identifier relevant to the violation.

## Settings

**Default:** mandatory-required

mandatory-required

Check for mandatory and required guidelines.

- **Mandatory guidelines:** Your code must comply with these guidelines.
- **Required guidelines:** You may deviate from these these guidelines. However, you must complete a formal deviation record, and your deviation must be authorized.

See Section 5.4 of the MISRA C:2012 guidelines. For an example of a deviation record, see Appendix I of the MISRA C:2012 guidelines.

---

**Note** To turn off some required guidelines, instead of mandatory - required select custom. To clear specific guidelines, click . In the **Comment** column, enter your rationale for disabling a guideline. For instance, you can enter the Deviation ID that refers to a deviation record for the guideline. The rationale appears in your generated report.

---

### mandatory

Check for mandatory guidelines.

### CERT - rules

Check for a subset of coding rules that corresponds to CERT-C rules.

See “CERT C Coding Standard and Polyspace Results”.

### CERT - all

Check for a subset of coding rules that corresponds to CERT-C rules and recommendations.

See “CERT C Coding Standard and Polyspace Results”.

### ISO-17961

Check for a subset of coding rules that corresponds to the ISO/IEC TS 17961 coding standard.

### all

Check for mandatory, required, and advisory guidelines.

### SQ0 - subset1

Check for only a subset of guidelines. In Polyspace Code Prover, observing these rules can reduce the number of unproven results. For more information, see “Software Quality Objective Subsets (C:2012)”.

### SQ0 - subset2

Check for the subset SQ0 - subset1, plus some additional rules. In Polyspace Code Prover, observing these rules can further reduce the number of unproven results. For more information, see “Software Quality Objective Subsets (C:2012)”.

## custom

Specify guidelines to check. Click  to create a coding rules file. Save the file. To reuse it for another project, do one of the following:

- Enter full path to the file in the space provided.
- Click . Click  to load the file.

Custom file format:

```
rule number off|on
```

Use # to enter comments in the file. For example:

```
10.5 off # rule 10.5: essential type model
17.2 on # rule 17.2: functions
```

If you are writing the coding rules file manually, you can choose to only enter the rules that you want to turn off. When you run an analysis, Polyspace automatically turns on the other rules and populates the file.

## single-unit-rules

Check a subset of rules that apply only to single translation units. These rules are checked in the compilation phase of the analysis.

## system-decidable-rules

Check rules in the `single-unit-rules` subset and some rules that apply to the collective set of program files. The additional rules are the less complex rules that apply at the integration level. These rules can be checked only at the integration level because the rules involve more than one translation unit. These rules are checked in the compilation and linking phases of the analysis.

## Dependencies

- This option is available only if you set `Source code language (-lang)` to C or C++.

For projects with mixed C and C++ code, the MISRA C:2012 checker analyzes only .c files.

- If you set `Source code language (-lang)` to `C-CPP`, you can activate a C coding rule checker **and** a C++ coding rule checker. When you have both C and C++ coding rule checkers active, to avoid duplicate results, Polyspace does not produce the C coding rules found in the linking phase (such as MISRA C:2012 Rule 8.3).

### Tips

- To reduce unproven results in Polyspace Code Prover:
  - 1 Find coding rule violations in `SQ0-subset1`. Fix your code to address the violations and rerun verification.
  - 2 Find coding rule violations in `SQ0-subset2`. Fix your code to address the violations and rerun verification.
- If you select the option `single-unit-rules` or `system-decidable-rules` and choose to detect coding rule violations only, the analysis can complete quicker than checking other rules. For more information, see “Coding Rule Subsets Checked Early in Analysis”.
- Polyspace Code Prover does not support checking of the following:
  - MISRA C:2012 Directive 4.13 and 4.14
  - MISRA C:2012 Rule 21.13, 21.14, and 21.17 - 21.20
  - MISRA C:2012 Rule 22.1 - 22.4 and 22.6 - 22.10

For support of all MISRA C: 2012 rules including the security guidelines in Amendment 1, use Polyspace Bug Finder.

### Command-Line Information

**Parameter:** `-misra3`

**Value:** `mandatory-required` | `CERT-rules` | `CERT-all` | `ISO-17961` | `all` | `SQ0-subset1` | `SQ0-subset2` | `single-unit-rules` | `system-decidable-rules` | *file*

**Default:** `mandatory-required`

**Example:** `polyspace-bug-finder-nodesktop -lang c -sources file_name -misra3 mandatory-required`

## **See Also**

Generate results for sources and (-generate-results-for)

## **Topics**

“Specify Polyspace Analysis Options”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## Use generated code requirements (-misra3-agc-mode)

Check for violations of MISRA C:2012 rules and directives that apply to generated code

### Description

Specify whether to use the MISRA C:2012 categories for automatically generated code. This option changes which rules are mandatory, required, or advisory.

### Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node. See “Dependency” on page 1-151 for other options that you must also enable.

**Command line:** Use the option `-misra3-agc-mode`. See “Command-Line Information” on page 1-152.

### Why Use This Option

Use this option to specify that you are checking for MISRA C:2012 rules in generated code. The option modifies the MISRA C:2012 subsets so that they are tailored for generated code.

### Settings

Off (default)

Use the normal categories (mandatory, required, advisory) for MISRA C:2012 coding guideline checking.

On (default for analyses from Simulink)

Use the generated code categories (mandatory, required, advisory, readability) for MISRA C:2012 coding guideline checking.

For analyses started from the Simulink plug-in, this option is the default value.

### **Category changed to Advisory**

These rules are changed to advisory:

- 5.3
- 7.1
- 8.4, 8.5, 8.14
- 10.1, 10.2, 10.3, 10.4, 10.6, 10.7, 10.8
- 14.1, 14.4
- 15.2, 15.3
- 16.1, 16.2, 16.3, 16.4, 16.5, 16.6, 16.7
- 20.8

### **Category changed to Readability**

These guidelines are changed to readability:

- Dir 4.5
- 2.3, 2.4, 2.5, 2.6, 2.7
- 5.9
- 7.2, 7.3
- 9.2, 9.3, 9.5
- 11.9
- 13.3
- 14.2
- 15.7
- 17.5, 17.7, 17.8
- 18.5
- 20.5

## **Dependency**

To use this option, first select the Check MISRA C:2012 (-misra3) option.

## Command-Line Information

**Parameter:** `-misra3-agc-mode`

**Default:** Off

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -misra3 all -misra3-agc-mode`

## See Also

Generate results for sources and (-generate-results-for) | Check MISRA C:2012 (-misra3)

## Topics

“Specify Polyspace Analysis Options”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

# Check custom rules (-custom-rules)

Follow naming conventions for identifiers

## Description

Define naming conventions for identifiers and check your code against them.

## Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node.

**Command line:** Use the option `-custom-rules`. See “Command-Line Information” on page 1-156.

## Why Use This Option

Use this option to impose naming conventions on identifiers. Using a naming convention allows you to easily determine the nature of an identifier from its name. For instance, if you define a naming convention for structures, you can easily tell whether an identifier represents a structured variable or not.

After analysis, the **Results List** pane lists violations of the naming conventions. On the **Source** pane, for every violation, Polyspace assigns a ▼ symbol to the keyword or identifier relevant to the violation.

## Settings

On

Polyspace matches identifiers in your code against text patterns you define. Define the text patterns in a custom coding rules file. To create a coding rules file,

- Use the custom rules wizard:

- 1 Click . The New File window opens.
- 2 From the drop-down list **Set the following state to all Custom C**, select Off. Click **Apply**.
- 3 For every custom rule you want to check:
  - a Select **On** .
  - b In the **Convention** column, enter the error message you want to display if the rule is violated.

For example, for rule 4.3, **All struct fields must follow the specified pattern**, you can enter All struct fields must begin with s\_. This message appears on the **Result Details** pane if:

- You specify the **Pattern** as s\_[A-Za-z0-9\_]+.
  - A structure field in your code does not begin with s\_.
- c In the **Pattern** column, enter the text pattern.

For example, for rule 4.3, **All struct fields must follow the specified pattern**, you can enter s\_[A-Za-z0-9\_]+. Polyspace reports violation of rule 4.3 if a structure field does not begin with s\_.

You can use Perl regular expressions to define patterns. For instance, you can use the following expressions.

Expression	Meaning
.	Matches any single character except newline
[a-z0-9]	Matches any single letter in the set a - z, or digit in the set 0 - 9
[^a-e]	Matches any single letter not in the set a - e
\d	Matches any single digit
\w	Matches any single alphanumeric character or _
x?	Matches 0 or 1 occurrence of x

Expression	Meaning
x*	Matches 0 or more occurrences of x
x+	Matches 1 or more occurrences of x

For frequent patterns, you can use the following regular expressions:

- `(?!__)[a-z0-9_]+(?!__)`, matches a text pattern that does not start and end with two underscores.

```
int __text; //Does not match
int _text_; //Matches
```

- `[a-z0-9_]+_(u8|u16|u32|s8|s16|s32)`, matches a text pattern that ends with a specific suffix.

```
int _text_; //Does not match
int _text_s16; //Matches
int _text_s33; // Does not match
```

- `[a-z0-9_]+_(u8|u16|u32|s8|s16|s32)(_b3|_b8)?`, matches a text pattern that ends with a specific suffix and an optional second suffix.

```
int _text_s16; //Matches
int _text_s16_b8; //Matches
```

For a complete list of regular expressions, see Perl documentation.

- Manually edit an existing custom coding rules file:

- 1 Open the file with a text editor.

- 2 For every custom rule, enter the following information in adjacent lines.

- a Rule number, followed by `on` or `off`. For example:

```
4.3 on
```

- b The error message you want to display starting with `convention=`. For example:

```
convention=All struct fields must begin with s_
```

- c The text pattern starting with `pattern=`. For example:

```
pattern=s_[A-Za-z0-9_]
```

If you are writing the coding rules file manually, you can choose to only enter the rules that you want to turn off. When you run an analysis, Polyspace automatically turns on the other rules and populates the file.

To use an existing coding rules file, enter the full path to the file in the field provided or use  in the New File window to navigate to the file location.

Off (default)

Polyspace does not check your code against custom naming conventions.

## Command-Line Information

**Parameter:** `-custom-rules`

**Value:** Name of coding rules file

**Default:** Off

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -custom-rules "C:\Rules\myrules.txt"`

## See Also

### Topics

“Specify Polyspace Analysis Options”

“Create Custom Coding Rules”

“Format of Custom Coding Rules File”

# Effective boolean types (-boolean-types)

Specify data types that coding rule checker must treat as effectively Boolean

## Description

Specify data types that the coding rule checker must treat as effectively Boolean. You can specify a data type only if you have defined it through a `typedef` statement in your source code.

## Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node. See “Dependencies” on page 1-159 for other options that you must also enable.

**Command line:** Use the option `-boolean-types`. See “Command-Line Information” on page 1-159.

## Why Use This Option

Use this option to allow Polyspace to check the following coding rules:

- MISRA C: 2004 and MISRA AC AGC

Rule Number	Rule Statement
12.6	Operands of logical operators, <code>&amp;&amp;</code> , <code>  </code> , and <code>!</code> , should be effectively Boolean. Expressions that are effectively Boolean should not be used as operands to other operators.
13.2	Tests of a value against zero should be made explicit, unless the operand is effectively Boolean.
15.4	A <code>switch</code> expression should not represent a value that is effectively Boolean.

- MISRA C: 2012

Rule Number	Rule Statement
10.1 on page 5-160	Operands shall not be of an inappropriate essential type
10.3 on page 5-169	The value of an expression shall not be assigned to an object with a narrower essential type or of a different essential type category
10.5 on page 5-173	The value of an expression should not be cast to an inappropriate essential type
14.4 on page 5-247	The controlling expression of an if statement and the controlling expression of an iteration-statement shall have essentially Boolean type.
16.7 on page 5-286	A switch-expression shall not have essentially Boolean type.

For example, in the following code, unless you specify `myBool` as effectively Boolean, Polyspace detects a violation of MISRA C: 2012 rule 14.4.

```
typedef int myBool;  
  
void func1(void);  
void func2(void);  
  
void func(myBool flag) {  
    if(flag)  
        func1();  
    else  
        func2();  
}
```

## Settings

### No Default

Click  to add a field. Enter a type name that you want Polyspace to treat as Boolean.

## Dependencies

This option is available only if you select Check MISRA AC AGC (-misra-ac-agc), Check MISRA C:2004 (-misra2), or Check MISRA C:2012 (-misra3).

## Command-Line Information

**Parameter:** -boolean-types

**Value:** *type1*[,*type2*[,...]]

**No Default**

**Example:** polyspace-bug-finder-nodesktop -sources *filename* -misra2  
required-rules -boolean-types boolean1\_t,boolean2\_t

## See Also

Check MISRA AC AGC (-misra-ac-agc) | Check MISRA C:2004 (-misra2) |  
Check MISRA C:2012 (-misra3)

## Topics

“Specify Polyspace Analysis Options”

“Check for Coding Rule Violations”

## Allowed pragmas (-allowed-pragmas)

Specify pragma directives for which MISRA C:2004 rule 3.4 must not be applied

### Description

Specify pragma directives for which MISRA C:2004 rule 3.4 or MISRA C++ rule 16-6-1 must not be applied.

### Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node. See “Dependencies” on page 1-161 for other options that you must also enable.

**Command line:** Use the option `-allowed-pragmas`. See “Command-Line Information” on page 1-161.

### Why Use This Option

MISRA C:2004/MISRA AC AGC rule 3.4 and MISRA C++ rule 16-6-1 require that all pragma directives are documented within the documentation of the compiler. If you list a pragma as documented using this analysis option, Polyspace does not flag use of the pragma as a violation of these rules.

### Settings

#### No Default

Click  to add a field. Enter the pragma name that you want Polyspace to ignore during coding rule checking .

## Dependencies

This option is enabled only if you select one of the following options:

- Check MISRA C:2004 (-misra2)
- Check MISRA AC AGC (-misra-ac-agc).
- Check MISRA C++ rules (-misra-cpp)

## Command-Line Information

**Parameter:** -allowed-pragmas

**Value:** *pragma1*[,*pragma2*[,...]]

**No Default**

**Example:** polyspace-bug-finder-nodesktop -sources *filename* -misra-cpp  
required-rules -allowed-pragmas *pragma\_01,pragma\_02*

**Example:** polyspace-bug-finder-nodesktop -sources *filename* -misra2  
required-rules -allowed-pragmas *pragma\_01,pragma\_02*

## See Also

Check MISRA C:2004 (-misra2) | Check MISRA AC AGC (-misra-ac-agc) |  
Check MISRA C++ rules (-misra-cpp)

## Topics

“Check for Coding Rule Violations”

“MISRA C:2004 and MISRA AC AGC Coding Rules”

“MISRA C++:2008 Rules”

## Check MISRA C++ rules (-misra-cpp)

Check for violations of MISRA C++ rules

### Description

Specify whether to check for violation of MISRA C++ rules. Each value of the option corresponds to a subset of rules to check.

### Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node. See “Dependency” on page 1-164 for other options that you must also enable.

**Command line:** Use the option `-misra-cpp`. See “Command-Line Information” on page 1-164.

### Why Use This Option

Use this option to specify the subset of MISRA C++ rules to check for.

After analysis, the **Results List** pane lists the coding rule violations. On the **Source** pane, for every coding rule violation, Polyspace assigns a  symbol to the keyword or identifier relevant to the violation.

### Settings

**Default:** `required-rules`

`required-rules`

Check required coding rules.

`all-rules`

Check required and advisory coding rules.

### CERT-rules

Check a subset of MISRA C++ rules that correspond to CERT® C++ rules.

See “CERT C++ Coding Standard and Polyspace Results”

### CERT-all

Check a subset of MISRA C++ rules that correspond to CERT C++ rules. This subset is the same as for CERT-rules.

See “CERT C++ Coding Standard and Polyspace Results”


### SQ0-subset1

Check only a subset of MISRA C++ rules. In Polyspace Code Prover, observing these rules can reduce the number of unproven results. For more information, see “Software Quality Objective Subsets (C++)”.


### SQ0-subset2

Check a subset of rules including SQ0-subset1 and some additional rules. In Polyspace Code Prover, observing these rules can further reduce the number of unproven results. For more information, see “Software Quality Objective Subsets (C++)”

### custom

Specify coding rules to check. Click  to create a coding rules file.

After creating and saving the file, to reuse it for another project, do one of the following:

- Enter full path to the file in the space provided.
- Click . Click  to load the file.

Format of the custom file:

```
<rule number> off|on
```

Use # to enter comments in the file. For example:

```
9-5-1 off # rule 9-5-1: classes
15-0-2 on # rule 15-0-2: exception handling
```

If you are writing the coding rules file manually, you can choose to only enter the rules that you want to turn off. When you run an analysis, Polyspace automatically turns on the other rules and populates the file.

## Dependency

This option is available only if you set `Source code language (-lang)` to CPP or C-CPP.

For projects with mixed C and C++ code, the MISRA C++ checker analyzes only `.cpp` files.

## Command-Line Information

**Parameter:** `-misra-cpp`

**Value:** `required-rules | all-rules | SQ0-subset1 | SQ0-subset2 | file`

**Default:** `required-rules`

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -misra-cpp all-rules`

## See Also

Generate results for sources and `(-generate-results-for)`

## Topics

“Specify Polyspace Analysis Options”

“Check for Coding Rule Violations”

“Polyspace MISRA C++ Checkers”

“Software Quality Objective Subsets (C++)”

“MISRA C++:2008 Rules”

# Check JSF C++ rules (-jsf-coding-rules)

Check for violations of JSF C++ rules

## Description

Specify whether to check for violation of JSF C++ rules (JSF++:2005). Each value of the option corresponds to a subset of rules to check.

## Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node. See “Dependency” on page 1-167 for other options that you must also enable.

**Command line:** Use the option `-jsf-coding-rules`. See “Command-Line Information” on page 1-167.

## Why Use This Option

Use this option to specify the subset of JSF C++ rules to check for.

After analysis, the **Results List** pane lists the coding rule violations. On the **Source** pane, for every coding rule violation, Polyspace assigns a  symbol to the keyword or identifier relevant to the violation.

## Settings

**Default:** `shall-rules`

`shall-rules`

Check all **Shall** rules. **Shall** rules are mandatory requirements and require verification.


## shall-will-rules

Check all **Shall** and **Will** rules. **Will** rules are intended to be mandatory requirements but do not require verification.


## all-rules

Check all **Shall**, **Will**, and **Should** rules. **Should** rules are advisory rules.

## custom

Specify coding rules to check. Click  to create a coding rules file.

After creating and saving the file, to reuse it for another project, do one of the following:

- Enter full path to the file in the space provided.
- Click . Click  to load the file.

Format of the custom file:

```
<rule number> off|on
```

Use # to enter comments in the file. For example:

```
67 off # rule 67: classes  
202 on # rule 202: expressions
```

If you are writing the coding rules file manually, you can choose to only enter the rules that you want to turn off. When you run an analysis, Polyspace automatically turns on the other rules and populates the file.

## Tips

- If your project uses a setting other than `iso` for `Compiler (-compiler)`, some rules might not be completely checked. For example, AV Rule 8: “All code shall conform to ISO/IEC 14882:2002(E) standard C++.”

## Dependency

This option is available only if you set `Source code language (-lang)` to `CPP` or `C-CPP`.

For projects with mixed C and C++ code, the JSF C++ checker analyzes only `.cpp` files.

## Command-Line Information

**Parameter:** `-jsf-coding-rules`

**Value:** `shall-rules` | `shall-will-rules` | `all-rules` | *file*

**Default:** `shall-rules`

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -jsf-coding-rules all-rules`

## See Also

Generate results for sources and `(-generate-results-for)`

## Topics

“Specify Polyspace Analysis Options”

“Check for Coding Rule Violations”

“Polyspace JSF C++ Checkers”

“JSF C++ Coding Rules”

## Calculate code metrics (-code-metrics)

Compute and display code complexity metrics

### Description

Specify that Polyspace must compute and display code complexity metrics for your source code. The metrics include file metrics such as number of lines and function metrics such as cyclomatic complexity and estimated size of local variables.

For more information, see “Compute Code Complexity Metrics”.

### Set Option

**User interface:** In your project configuration, the option is on the **Coding Rules & Code Metrics** node.

**Command line:** Use the option `-code-metrics`. See “Command-Line Information” on page 1-169.

### Why Use This Option

By default, Polyspace does not calculate code complexity metrics. If you want these metrics in your analysis results, before running analysis, set this option.

High values of code complexity metrics can lead to obscure code and increase chances of coding errors. Additionally, if you run a Code Prover verification on your source code, you might benefit from checking your code complexity metrics first. If a function is too complex, attempts to verify the function can lead to a lot of unproven code. For information on how to cap your code complexity metrics, see .

### Settings

On

Polyspace computes and displays code complexity metrics on the **Results List** pane.

Off (default)

Polyspace does not compute complexity metrics.

## Tips

If you want to compute only the code complexity metrics for your code:

- In Bug Finder, disable checking of defects. See `Find defects (-checkers)`.
- In Code Prover, run verification up to the `Source Compliance Checking` phase. See `Verification level (-to)`.

## Command-Line Information

**Parameter:** `-code-metrics`

**Default:** Off

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -code-metrics`

## See Also

### Topics

“Compute Code Complexity Metrics”

## Find defects (-checkers)

Enable or disable defect checkers

### Description

*This option affects a Bug Finder analysis only.*

Enable checkers for bugs/coding defects.

### Set Option

**User interface:** In your project configuration, the option is on the **Bug Finder Analysis** node.

**Command line:** Use the option `-checkers`. See “Command-Line Information” on page 1-172.

### Why Use This Option

The default set of checkers is designed to find the most meaningful bugs in most software development situations. If you have specific needs, enable or disable individual defect checkers. For instance, if you want to follow a specific security standard, choose a different subset of checkers.

### Settings

**Default:** `default`

`default`

A subset of defects defined by the software. For information on which defects are default, refer to the individual defect reference pages.

`all`

All defects.

## CWE

A subset of defects that correspond to CWE™ IDs.

See “CWE Coding Standard and Polyspace Results”.

## CERT-rules

A subset of defects that correspond to CERT C rules when you analyze C code, or CERT C++ rules when you analyze C++ code.

See:

- “CERT C Coding Standard and Polyspace Results”
- “CERT C++ Coding Standard and Polyspace Results”

## CERT-all

A subset of defects that correspond to CERT C rules and recommendations when you analyze C code. For C++ code, this subset is the same as CERT-rules.

See:

- “CERT C Coding Standard and Polyspace Results”
- “CERT C++ Coding Standard and Polyspace Results”

## ISO-17961

A subset of defects that correspond to ISO/IEC TS 17961 coding standard.

See “ISO/IEC TS 17961 Coding Standard and Polyspace Results”.

## custom

Choose the defects you want to find by selecting categories of checkers or specific defects.

## Tips

You can use a spreadsheet to keep track of the defect checkers that you enable and add notes explaining why you do not enable the other checkers. A spreadsheet of checkers is provided in *matlabroot*\polyspace\resources. Here, *matlabroot* is the MATLAB installation folder, such as C:\Program Files\MATLAB\R2017a.

## Command-Line Information

Regardless of order, the shell script processes the `-checkers` option, and then `-disable-checkers` option.

For the command-line parameters values, see “Short Names of Bug Finder Defect Checkers”.

**Parameter:** `-checkers`

**Value:** `default` | `none` | `all` | `CWE` | `CERT-rules` | `CERT-all` | `ISO-17961` | `defect group` | `defect parameters`

**Default:** `default`

**Parameter:** `-disable-checkers`

**Value:** `defect group` | `defect parameters`

**Example 1:** `polyspace-bug-finder-nodesktop -sources filename -checkers numerical,data_flow -disable-checkers FLOAT_ZERO_DIV`

**Example 2:** `polyspace-bug-finder-nodesktop -sources filename -checkers default -disable-checkers concurrency,dead_code`

## See Also

“Defects”

## Topics

“Specify Polyspace Analysis Options”

“Short Names of Bug Finder Defect Checkers”

“Bug Finder Defect Groups”

# Class (-class-analyzer)

Specify classes that you want to verify

## Description

*This option affects a Code Prover analysis only.*

Specify classes that Polyspace uses to generate a main.

## Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-174 for other options that you must also enable.

**Command line:** Use the option `-class-analyzer`. See “Command-Line Information” on page 1-174.

## Why Use This Option

If you are verifying a module or library, Code Prover generates a main function if one does not exist. If a main exists, the analysis uses the existing main.

Use this option and the option `Functions to call within the specified classes (-class-analyzer-calls)` to specify the class methods that the generated main must call. Unless a class method is called directly or indirectly from main, the software does not analyze the method.

## Settings

**Default:** all

all

Polyspace can use all classes to generate a main. The generated main calls methods that you specify using **Functions to call within the specified classes**.

none

The generated `main` cannot call any class method.

custom

Polyspace can use classes that you specify to generate a `main`. The generated `main` calls methods from classes that you specify using **Functions to call within the specified classes**.

## Dependencies

You can use this option only if all of the following are true:

- Your code does not contain a `main` function.
- Source code language (`-lang`) is set to C++.
- Verify module or library (`-main-generator`) is selected.

## Tips

If you select `none` for this option, Polyspace will not verify class methods that you do not call explicitly in your code.

## Command-Line Information

**Parameter:** `-class-analyzer`

**Value:** `all` | `none` | `custom=class1[,class2,...]`

**Default:** `all`

**Example:** `polyspace-code-prover-nodesktop -sources file_name -main-generator -class-analyzer custom=myClass1,myClass2`

## See Also

`Verify module or library (-main-generator)` | `Functions to call within the specified classes (-class-analyzer-calls)` | `Analyze class contents only (-class-only)` | `Skip member initialization check (-no-constructors-init-check)`

## **Topics**

"Specify Polyspace Analysis Options" (Polyspace Code Prover)

"Verify C++ Classes" (Polyspace Code Prover)

## Functions to call within the specified classes (-class-analyzer-calls)

Specify class methods that you want to verify

### Description

*This option affects a Code Prover analysis only.*

Specify class methods that Polyspace uses to generate a `main`. The generated `main` can call static, public and protected methods in classes that you specify using the **Class** option.

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-178 for other options that you must also enable.

**Command line:** Use the option `-class-analyzer-calls`. See “Command-Line Information” on page 1-178.

### Why Use This Option

If you are verifying a module or library, Code Prover generates a `main` function if one does not exist. If a `main` exists, the analysis uses the existing `main`.

Use this option and the option `Class` (`-class-analyzer`) to specify the class methods that the generated `main` must call. Unless a class method is called directly or indirectly from `main`, the software does not analyze the method.

### Settings

**Default:** unused

### all

The generated main calls all public and protected methods. It does not call methods inherited from a parent class.

### all-public

The generated main calls all public methods. It does not call methods inherited from a parent class.

### inherited-all

The generated main calls all public and protected methods including those inherited from a parent class.

### inherited-all-public

The generated main calls all public methods including those inherited from a parent class.

### unused

The generated main calls public and protected methods that are not called in the code.

### unused-public

The generated main calls public methods that are not called in the code. It does not call methods inherited from a parent class.

### inherited-unused

The generated main calls public and protected methods that are not called in the code including those inherited from a parent class.

### inherited-unused-public

The generated main calls public methods that are not called in the code including those inherited from a parent class.

### custom

The generated main calls the methods that you specify.

Enter function names or choose from a list.

- Click  to add a field and enter the function name.
- Click  to list functions in your code. Choose functions from the list.

If you use the scope resolution operator to specify the function from a particular namespace, enter the fully qualified name, for instance, `myClass::myMethod(int)`.

If the function does not have a parameter, use an empty parenthesis, for instance, `myClass::myMethod()`.

## Dependencies

You can use this option only if:

- Source code language (`-lang`) is set to CPP.
- Verify module or library (`-main-generator`) is selected.

## Command-Line Information

**Parameter:** `-class-analyzer-calls`

**Value:** `all | all-public | inherited-all | inherited-all-public | unused | unused-public | inherited-unused | inherited-unused-public | custom=method1[,method2,...]`

**Default:** `unused`

**Example:** `polyspace-code-prover-nodesktop -sources file_name -main-generator -class-analyzer custom=myClass1,myClass2 -class-analyzer-calls unused-public`

## See Also

`Verify module or library (-main-generator) | Class (-class-analyzer) | Analyze class contents only (-class-only) | Skip member initialization check (-no-constructors-init-check)`

## Topics

“Specify Polyspace Analysis Options” (Polyspace Code Prover)

“Verify C++ Classes” (Polyspace Code Prover)

## Analyze class contents only (-class-only)

Do not analyze code other than class methods

### Description

*This option affects a Code Prover analysis only.*

Specify that Polyspace must verify only methods of classes that you specify using the option `Class` (-class-analyzer).

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-180 for other options that you must also enable.

**Command line:** Use the option `-class-only`. See “Command-Line Information” on page 1-180.

### Why Use This Option

Use this option to restrict the analysis to certain class methods only.

You specify these methods through the options:

- `Class` (-class-analyzer)
- Functions to call within the specified classes (-class-analyzer-calls)

When you analyze a module or library, Code Prover generates a `main` function if one does not exist. The `main` function calls class methods using these two options and functions that are not class methods using other options. Code Prover analyzes these methods and functions for robustness to all inputs. If you use this option, Code Prover analyzes the methods only.

## Settings

On

Polyspace verifies the class methods only. It stubs functions out of class scope even if the functions are defined in your code.

Off (default)

Polyspace verifies functions out of class scope in addition to class methods.

## Dependencies

You can use this option only if all of the following are true:

- Your code does not contain a `main` function.
- Source code language (`-lang`) is set to `CPP`.
- `Verify module or library (-main-generator)` is selected.

If you select this option, you must specify the classes using the `Class (-class-analyzer)` option.

## Tips

Use this option:

- For robustness verification of class methods. Unless you use this option, Polyspace verifies methods that you call in your code only for your input combinations.
- In case of scaling.

## Command-Line Information

**Parameter:** `-class-only`

**Default:** `Off`

## See Also

`Verify module or library (-main-generator) | Class (-class-analyzer) | Functions to call within the specified classes (-class-analyzer-`

calls) | Skip member initialization check (-no-constructors-init-check)

## **Topics**

“Specify Polyspace Analysis Options” (Polyspace Code Prover)

“Verify C++ Classes” (Polyspace Code Prover)

## Initialization functions (-functions-called-before-main)

Specify functions that you want the generated `main` to call ahead of other functions

### Description

*This option affects a Code Prover analysis only.*

Specify functions that you want the generated `main` to call ahead of other functions.

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-183 for other options that you must also enable.

**Command line:** Use the option `-functions-called-before-main`. See “Command-Line Information” on page 1-184.

### Why Use This Option

If you are verifying a module or library, Code Prover generates a `main` function if one does not exist. If a `main` exists, the analysis uses the existing `main`.

Use this option along with the option `Functions to call (-main-generator-calls)` to specify which functions the generated `main` must call. Unless a function is called directly or indirectly from `main`, the software does not analyze the function.

### Settings

#### No Default

Enter function names or choose from a list.

- Click  to add a field and enter the function name.
- Click  to list functions in your code. Choose functions from the list.

If the function or method is not overloaded, specify the function name. Otherwise, specify the function prototype with arguments. For instance, in the following code, you must specify the prototypes `func(int)` and `func(double)`.

```
int func(int x) {  
    return(x * 2);  
}  
double func(double x) {  
    return(x * 2);  
}
```

For C++, if the function is:

- A class method: The generated `main` calls the class constructor before calling this function.
- Not a class method: The generated `main` calls this function before calling class methods.

If you use the scope resolution operator to specify the function from a particular namespace, enter the fully qualified name, for instance, `myClass::init(int)`. If the function does not have a parameter, use an empty parenthesis, for instance, `myClass::init()`.

## Dependencies

This option is enabled only if you select **Verify module or library** under **Code Prover Verification** and your code does not contain a `main` function.

## Tips

Although these functions are called ahead of other functions, they can be called in arbitrary order. If you want to call your initialization functions in a specific order, manually write a `main` function to call them.

## Command-Line Information

**Parameter:** -functions-called-before-main

**Value:** *function1*[,*function2*[,...]]

**No Default**

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -main-generator -functions-called-before-main myfunc

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -main-generator -functions-called-before-main myClass::init(int)

## See Also

Verify module or library (-main-generator) | Variables to initialize (-main-generator-writes-variables) | Functions to call (-main-generator-calls) | Class (-class-analyzer) | Functions to call within the specified classes (-class-analyzer-calls) | Analyze class contents only (-class-only)

## Topics

“Verify C Application Without main Function” (Polyspace Code Prover)

# Verify whole application

Stop verification if sources files are incomplete and do not contain a main function

## Description

*This option affects a Code Prover analysis only.*

Specify that Polyspace verification must stop if a `main` function is not present in the source files.

If you select a Visual C++ setting for `Compiler (-compiler)`, you can specify which function must be considered as `main`. See `Main entry point (-main)`.

## Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node.

**Command line:** There is no corresponding command-line option. See “Command-Line Information” on page 1-186.

## Settings

On

Polyspace verification stops if it does not find a `main` function in the source files.

Off (default)

Polyspace continues verification even when a `main` function is not present in the source files. If a `main` is not present, it generates a file `__polyspace_main.c` that contains a `main` function.

## **Command-Line Information**

Unlike the user interface, by default, a verification from the command line stops if it does not find a `main` function in the source files. If you specify the option `-main-generator`, Polyspace generates a `main` if it cannot find one in the source files.

## **See Also**

Verify module or library (`-main-generator`)

## **Topics**

“Verify C Application Without main Function” (Polyspace Code Prover)

## Main entry point (-main)

Specify a Microsoft Visual C++ extensions of `main`

### Description

*This option affects a Code Prover analysis only.*

Specify the function that you want to use as `main`. If the function does not exist, the verification stops with an error message. Use this option to specify Microsoft Visual C++ extensions of `main`.

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-188 for other options that you must also enable.

**Command line:** Use the option `-main`. See “Command-Line Information” on page 1-188.

### Settings

**Default:** `_tmain`

`_tmain`

Use `_tmain` as entry point to your code.

`wmain`

Use `wmain` as entry point to your code.

`_tWinMain`

Use `_tWinMain` as entry point to your code.

`wWinMain`

Use `wWinMain` as entry point to your code.

`WinMain`

Use `WinMain` as entry point to your code.

DllMain

Use DllMain as entry point to your code.

## Dependencies

This option is enabled only if you:

- Set Source code language (-lang) to CPP.
- Select **Verify whole application**

## Command-Line Information

**Parameter:** -main

**Value:** \_tmain | wmain | \_tWinMain | wWinMain | WinMain | DllMain

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -compiler  
visual14.0 -main \_tmain

## See Also

Verify module or library (-main-generator)

## Functions to call (-main-generator-calls)

Specify functions that you want the generated main to call after the initialization functions

### Description

*This option affects a Code Prover analysis only.*

Specify functions that you want the generated main to call. The main calls these functions after the ones you specify through the option `Initialization functions (-functions-called-before-main)`.

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-190 for other options that you must also enable.

**Command line:** Use the option `-main-generator-calls`. See “Command-Line Information” on page 1-191.

### Why Use This Option

If you are verifying a module or library, Code Prover generates a main function if one does not exist. If a main exists, the analysis uses the existing main.

Use this option along with the option `Initialization functions (-functions-called-before-main)` to specify which functions the generated main must call. Unless a function is called directly or indirectly from main, the software does not analyze the function.

### Settings

**Default:** unused

none

The generated `main` does not call any function.

unused

The generated `main` calls only those functions that are not called in the source code. It does not call inlined functions.

all

The generated `main` calls all functions except inlined ones.

custom

The generated `main` calls functions that you specify.

Enter function names or choose from a list.

- Click  to add a field and enter the function name.
- Click  to list functions in your code. Choose functions from the list.

If you use the scope resolution operator to specify the function from a particular namespace, enter the fully qualified name, for instance, `myClass::myMethod(int)`. If the function does not have a parameter, use an empty parenthesis, for instance, `myClass::myMethod()`.

## Dependencies

This option is available only if you select `Verify module or library (-main-generator)`.

## Tips

- Select `unused` when you use **Code Prover Verification > Verify files independently**.
- If you want the generated `main` to call an inlined function, select `custom` and specify the name of the function.
- To verify a multitasking application without a `main`, select `none`.
- The generated `main` can call the functions in arbitrary order. If you want to call your functions in a specific order, manually write a `main` function to call them.

## Command-Line Information

**Parameter:** -main-generator-calls

**Value:** none | unused | all | custom=*function1*[,*function2*[,...]]

**Default:** unused

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -main-generator -main-generator-calls all

## See Also

Verify module or library (-main-generator) | Variables to initialize (-main-generator-writes-variables) | Initialization functions (-functions-called-before-main) | Class (-class-analyzer) | Functions to call within the specified classes (-class-analyzer-calls) | Analyze class contents only (-class-only)

## Topics

“Verify C Application Without main Function” (Polyspace Code Prover)

## Variables to initialize (-main-generator-writes-variables)

Specify global variables that you want the generated main to initialize

### Description

*This option affects a Code Prover analysis only.*

Specify global variables that you want the generated main to initialize. Polyspace considers these variables to have any value allowed by their type.

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-193 for other options that you must also enable.

**Command line:** Use the option `-main-generator-writes-variables`. See “Command-Line Information” on page 1-193.

### Why Use This Option

If you are verifying a module or library, Code Prover generates a main function if one does not exist. If a main exists, the analysis uses the existing main.

Use this option to specify which global variables the generated main must initialize.

### Settings

#### Default:

- C code — public
- C++ Code — uninit

**uninit**

C++ Only

The generated `main` only initializes global variables that you have not initialized during declaration.

**none**

The generated `main` does not initialize global variables.

**public**

The generated `main` initializes all global variables except those declared with keywords `static` and `const`.

**all**

The generated `main` initializes all global variables except those declared with keyword `const`.

**custom**

The generated `main` only initializes global variables that you specify. Click  to add a field. Enter a global variable name.

## Dependencies

You can use this option only if the following are true:

- Your code does not contain a `main` function.
- Verify `module` or `library` (-main-generator) is selected.

## Command-Line Information

**Parameter:** -main-generator-writes-variables

**Value:** uninit | none | public | all | custom=*variable1*[,*variable2*[,...]]

**Default:** (C) public | (C++) uninit

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -main-generator -main-generator-writes-variables all

## See Also

Verify module or library (-main-generator) | Initialization functions (-functions-called-before-main) | Functions to call (-main-generator-

calls) | Class (-class-analyzer) | Functions to call within the specified classes (-class-analyzer-calls) | Analyze class contents only (-class-only)

## **Topics**

“Verify C Application Without main Function” (Polyspace Code Prover)

# Skip member initialization check (-no-constructors-init-check)

Do not check if class constructor initializes class members

## Description

*This option affects a Code Prover analysis only.*

Specify that Polyspace must not check whether each class constructor initializes all class members.

## Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-196 for other options that you must also enable.

**Command line:** Use the option `-no-constructors-init-check`. See “Command-Line Information” on page 1-196.

## Why Use This Option

Use this option to disable checks for initialization of class members in constructors.

## Settings

On

Polyspace does not check whether each class constructor initializes all class members.

Off (default)

Polyspace checks whether each class constructor initializes all class members. It uses the functions `check_NIV()` and `check_NIP()` in the generated `main` to perform these checks. It checks for initialization of:

- Integer types such as `int`, `char` and `enum`, both signed or unsigned.
- Floating-point types such as `float` and `double`.
- Pointers.

## Dependencies

You can use this option only if all of the following are true:

- Your code does not contain a `main` function.
- Source code language (`-lang`) is set to `CPP`.
- `Verify module or library (-main-generator)` is selected.

If you select this option, you must specify the classes using the `theClass (-class-analyzer)` option.

## Command-Line Information

**Parameter:** `-no-constructors-init-check`

**Default:** Off

## See Also

`Verify module or library (-main-generator) | Class (-class-analyzer)`

## Topics

“Specify Polyspace Analysis Options” (Polyspace Code Prover)

# Verify files independently (-unit-by-unit)

Verify each source file independently of other source files

## Description

*This option affects a Code Prover analysis only.*

Specify that each source file must be verified independently of other source files. Each file is verified individually, independent of other files in the module. Verification results can be viewed for the entire project or for individual files.

After you open the verification result for one file, you can see a summary of results for all files on the **Dashboard** pane. You can open the results for each file directly from this summary table.

## Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-198 for other options that you must also enable.

**Command line:** Use the option `-unit-by-unit`. See “Command-Line Information” on page 1-199.

## Why Use This Option

There are many reasons you might want to verify each source file independently of other files.

For instance, if verification of a project takes very long, you can perform a file by file verification to identify which file is slowing the verification.

## Settings

On

Polyspace creates a separate verification job for each source file.

Off (default)

Polyspace creates a single verification job for all source files in a module.

## Dependencies

This option is enabled only if you select `Verify module` or `library` (`-main-generator`).

## Tips

- If you perform a file by file verification, you cannot specify multitasking options.
- If your verification for the entire project takes very long, perform a file by file verification. After the verification is complete for a file, you can view the results while other files are still being verified.
- You can generate a report of the verification results for each file or for all the files together.

To generate a single report for all the files:

- 1 Open the results for one file.
  - 2 Select **Reporting > Run Report**. Before generating the report, select the option **Generate a single report including all unit results**.
- When you perform a file-by-file verification, you can see many instances of unused variables. Some of these variables might be used in other files but show as unused in a file-by-file verification.

If you want to ignore these results, use a review scope (named set of filters) that filters out unused variables. See “Filter and Group Results” (Polyspace Code Prover).

## Command-Line Information

**Parameter:** -unit-by-unit

**Default:** Off

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -unit-by-unit

## See Also

Common source files (-unit-by-unit-common-source)

## Common source files (-unit-by-unit-common-source)

Specify files that you want to include with each source file during a file by file verification

### Description

*This option affects a Code Prover analysis only.*

For a file by file verification, specify files that you want to include with each source file verification. These files are compiled once, and then linked to each verification.

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node. See “Dependencies” on page 1-201 for other options that you must also enable.

**Command line:** Use the option `-unit-by-unit-common-source`. See “Command-Line Information” on page 1-201.

### Why Use This Option

There are many reasons you might want to verify each source file independently of other files. For instance, if verification of a project takes very long, you can perform a file by file verification to identify which file is slowing the verification.

If you perform a file by file verification, some of your files might be missing information present in the other files. Place the missing information in a common file and use this option to specify the file for verification. For instance, if multiple source files call the same function, use this option to specify a file that contains the function definition or a function stub. Otherwise, Polyspace uses its own stubs for functions that are called but not defined in the source files. The assumptions behind the Polyspace stubs can be broader than what you want, leading to orange checks.

## Settings

### No Default

Click  to add a field. Enter the full path to a file. Otherwise, use the  button to navigate to the file location.

## Dependencies

This option is enabled only if you select `Verify files independently (-unit-by-unit)`.

## Command-Line Information

**Parameter:** `-unit-by-unit-common-source`

**Value:** `file1[,file2[,...]]`

**No Default**

**Example:** `polyspace-code-prover-nodesktop -sources file_name -unit-by-unit -unit-by-unit-common-source definitions.c`

## See Also

`Verify files independently (-unit-by-unit)`

## Verify model generated code (-main-generator)

Specify that a main function must be generated if it is not present in source files

### Description

*This option is available only for model-generated code.*

Specify that Polyspace must generate a main function if it does not find one in the source files.

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node.

**Command line:** Use the option -main-generator. See “Command-Line Information” on page 1-203.

### Settings

This option is always enabled for code generated from models.

Polyspace generates a main function for the analysis. The generated main contains cyclic code that executes in a loop. The loop can run an unspecified number of times.

The main performs the following functions before the loop begins:

- Initializes variables specified by Parameters (-variables-written-before-loop).
- Calls the functions specified by Initialization functions (-functions-called-before-loop).

The main then performs the following functions in the loop:

- Calls the functions specified by Step functions (-functions-called-in-loop).
- Writes to variables specified by Inputs (-variables-written-in-loop).

Finally, the main calls the functions specified by Termination functions (-functions-called-after-loop).

## Command-Line Information

**Parameter:** -main-generator

**Default:** On

**Example:** polyspace-bug-finder-nodesktop -sources *file\_name* -main-generator ...

## See Also

Parameters (-variables-written-before-loop) | Inputs (-variables-written-in-loop) | Initialization functions (-functions-called-before-loop) | Step functions (-functions-called-in-loop) | Termination functions (-functions-called-after-loop)

## Topics

“Configure Advanced Polyspace Options in Simulink”

“How Polyspace Analysis of Generated Code Works”

## Initialization functions (-functions-called-before-loop)

Specify functions that the generated main must call before the cyclic code loop

### Description

*This option is available only for model-generated code.*

Specify functions that the generated main must call before the cyclic code begins.

### Set Option

**User interface:** In your project configuration, the option is available on the **Main Generator** node.

**Command line:** Use the option `-functions-called-before-loop`. See “Command-Line Information” on page 1-204.

### Settings

#### No Default

Click  to add a field. Enter function name.

If you use the scope resolution operator to specify the function from a particular namespace, enter the fully qualified name, for instance, `myClass::init(int)`. If the function does not have a parameter, use an empty parenthesis, for instance, `myClass::init()`.

### Command-Line Information

**Parameter:** `-functions-called-before-loop`

**No Default**

**Value:** *function1[,function2[,...]]*

**Example:** polyspace-bug-finder-nodesktop -sources *file\_name* -main-generator -functions-called-before-loop myfunc

## See Also

Parameters (-variables-written-before-loop) | Inputs (-variables-written-in-loop) | Step functions (-functions-called-in-loop) | Termination functions (-functions-called-after-loop)

## Topics

“Configure Advanced Polyspace Options in Simulink”

“How Polyspace Analysis of Generated Code Works”

## Step functions (-functions-called-in-loop)

Specify functions that the generated main must call in the cyclic code loop

### Description

*This option is available only for model-generated code.*

Specify functions that the generated main must call in each cycle of the cyclic code.

### Set Option

**User interface:** In your project configuration, the option is available on the **Main Generator** node.

**Command line:** Use the option `-functions-called-in-loop`. See “Command-Line Information” on page 1-207.

### Settings

**Default:** none

none

The generated main does not call functions in the cyclic code.

all

The generated main calls all functions except inlined ones. If you specify certain functions for the options **Initialization functions** or **Termination functions**, the generated main does not call those functions in the cyclic code.

custom

The generated main calls functions that you specify. Click  to add a field. Enter function name.

If you use the scope resolution operator to specify the function from a particular namespace, enter the fully qualified name, for instance, `myClass::myMethod(int)`. If the function does not have a parameter, use an empty parenthesis, for instance, `myClass::myMethod()`.

## Tips

If you have specified a function for the option **Initialization functions** or **Termination functions**, to call it inside the cyclic code, use `custom` and specify the function name.

## Command-Line Information

**Parameter:** -functions-called-in-loop

**Value:** none | all | custom=*function1*[, *function2*[, ...]]

**Default:** none

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -main-generator -functions-called-in-loop all`

## See Also

Parameters (-variables-written-before-loop) | Inputs (-variables-written-in-loop) | Initialization functions (-functions-called-before-loop) | Termination functions (-functions-called-after-loop)

## Topics

“Configure Advanced Polyspace Options in Simulink”

“How Polyspace Analysis of Generated Code Works”

## Termination functions (-functions-called-after-loop)

Specify functions that the generated main must call after the cyclic code loop

### Description

*This option is available only for model-generated code.*

Specify functions that the generated main must call after the cyclic code ends.

### Set Option

**User interface:** In your project configuration, the option is available on the **Main Generator** node.

**Command line:** Use the option `-functions-called-after-loop`. See “Command-Line Information” on page 1-209.

### Settings

#### No Default

Click  to add a field. Enter function name.

If you use the scope resolution operator to specify the function from a particular namespace, enter the fully qualified name, for instance, `myClass::myMethod(int)`. If the function does not have a parameter, use an empty parenthesis, for instance, `myClass::myMethod()`.

### Tips

- If you specify a function for the option **Initialization functions**, you cannot specify it for **Termination functions**.

## Command-Line Information

**Parameter:** -functions-called-after-loop

**No Default**

**Value:** *function1[,function2[,...]]*

**Example:** polyspace-bug-finder-nodesktop -sources *file\_name* -main-generator -functions-called-after-loop myfunc

## See Also

Parameters (-variables-written-before-loop) | Inputs (-variables-written-in-loop) | Initialization functions (-functions-called-before-loop) | Step functions (-functions-called-in-loop)

## Topics

“Configure Advanced Polyspace Options in Simulink”

“How Polyspace Analysis of Generated Code Works”

## Parameters (-variables-written-before-loop)

Specify variables that the generated `main` must initialize before the cyclic code loop

### Description

*This option is available only for model-generated code.*

Specify variables that the generated `main` must initialize before the cyclic code loop begins. Before the loop begins, Polyspace considers these variables to have any value allowed by their type.

### Set Option

**User interface:** In your project configuration, the option is available on the **Main Generator** node.

**Command line:** Use the option `-variables-written-before-loop`. See “Command-Line Information” on page 1-211.

### Settings

**Default:** none

none

The generated `main` does not initialize variables.

all

The generated `main` initializes all variables except those declared with keyword `const`.

custom

The generated main only initializes variables that you specify. Click  to add a field. Enter variable name. For C++ class members, use the syntax `className::variableName`.

## Command-Line Information

**Parameter:** -variables-written-before-loop

**Value:** none | all | custom=*variable1*[,*variable2*[,...]]

**Default:** public

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -main-generator -variables-written-before-loop all`

## See Also

Inputs (-variables-written-in-loop) | Initialization functions (-functions-called-before-loop) | Step functions (-functions-called-in-loop) | Termination functions (-functions-called-after-loop)

## Topics

“Configure Advanced Polyspace Options in Simulink”

“How Polyspace Analysis of Generated Code Works”

## Inputs (-variables-written-in-loop)

Specify variables that the generated main must initialize in the cyclic code loop

### Description

*This option is available only for model-generated code.*

Specify variables that the generated main must initialize at the beginning of every iteration of the cyclic code loop. At the beginning of every loop iteration, Polyspace considers these variables to have any value allowed by their type.

### Set Option

**User interface:** In your project configuration, the option is available on the **Main Generator** node.

**Command line:** Use the option `-variables-written-in-loop`. See “Command-Line Information” on page 1-213.

### Settings

**Default:** none

none

The generated main does not initialize variables.

all

The generated main initializes all variables except those declared with keyword `const`.

custom

The generated main only initializes variables that you specify. Click  to add a field. Enter variable name. For C++ class members, use the syntax `className::variableName`.

## Command-Line Information

**Parameter:** -variables-written-in-loop

**Value:** none | all | custom=*variable1*[,*variable2*[,...]]

**Default:** none

**Example:** polyspace-bug-finder-nodesktop -sources *file\_name* -main-generator -variables-written-in-loop all

## See Also

Parameters (-variables-written-before-loop) | Initialization functions (-functions-called-before-loop) | Step functions (-functions-called-in-loop) | Termination functions (-functions-called-after-loop)

## Topics

“Configure Advanced Polyspace Options in Simulink”

“How Polyspace Analysis of Generated Code Works”

## Verify module or library (-main-generator)

Generate a `main` function if source files are modules or libraries that do not contain a `main`

### Description

*This option affects a Code Prover analysis only.*

Specify that Polyspace must generate a `main` function if it does not find one in the source files.

### Set Option

**User interface:** In your project configuration, the option is on the **Code Prover Verification** node.

**Command line:** Use the option `-main-generator`. See “Command-Line Information” on page 1-215.

For the analogous option for model generated code, see `Verify model generated code (-main-generator)`.

### Why Use This Option

Use this option if you are verifying a module or library. A Code Prover analysis requires a `main` function. When verifying a module or library, your code might not have a `main`.

When you use this option, Code Prover generates a `main` function if one does not exist. If a `main` exists, the analysis uses the existing `main`.

### Settings

On (default)

Polyspace generates a `main` function if it does not find one in the source files. The generated `main`:

- 1 Initializes variables specified by `Variables to initialize (-main-generator-writes-variables)`.
- 2 Before calling other functions, calls the functions specified by `Initialization functions (-functions-called-before-main)`.
- 3 In all possible orders, calls the functions specified by `Functions to call (-main-generator-calls)`.
- 4 (C++ only) Calls class methods specified by `Class (-class-analyzer)` and `Functions to call within the specified classes (-class-analyzer-calls)`.

If you do not specify the function and variable options above, the generated main:

- Initializes all global variables except those declared with keywords `const` and `static`.
- In all possible orders, calls all functions that are not called anywhere in the source files. Polyspace considers that global variables can be written between two consecutive function calls. Therefore, in each called function, global variables initially have the full range of values allowed by their type.

Off

Polyspace stops if a `main` function is not present in the source files.

## Tips

- If a `main` function is present in your source files, the verification uses that `main` function, irrespective of whether you enable or disable this option.

The option is relevant only if a `main` function is not present in your source files.

- If you specify multitasking options, the verification ignores your specifications for `main` generation. Instead, the verification introduces an empty `main` function.

For more information on the multitasking options, see “Configuring Polyspace Multitasking Analysis Manually”.

## Command-Line Information

**Parameter:** `-main-generator`

**Default:** Off

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -main-generator ...`

## See Also

Parameters (-variables-written-before-loop) | Inputs (-variables-written-in-loop) | Initialization functions (-functions-called-before-loop) | Step functions (-functions-called-in-loop) | Termination functions (-functions-called-after-loop)

## Topics

“Specify Polyspace Analysis Options”

## Consider volatile qualifier on fields (-consider-volatile-qualifier-on-fields)

Assume that `volatile` qualified structure fields can have all possible values at any point in code

### Description

*This option affects a Code Prover analysis only.*

Specify that the verification must take into account the `volatile` qualifier on fields of a structure.

### Set Option

**User interface:** In your project configuration, the option is available on the **Verification Assumptions** node.

**Command line:** Use the option `-consider-volatile-qualifier-on-fields`. See “Command-Line Information” on page 1-220.

### Why Use This Option

The `volatile` qualifier on a variable indicates that the variable value can change between successive operations even if you do not explicitly change it in your code. For instance, if `var` is a `volatile` variable, the consecutive operations `res = var; res =var;` can result in two different values of `var` being read into `res`.

Use this option so that the verification emulates the `volatile` qualifier for structure fields. If you select this option, the software assumes that a `volatile` structure field has a full range of values at any point in the code. The range is determined only by the data type of the structure field.

## Settings

On

The verification considers the `volatile` qualifier on fields of a structure.

In the following example, the verification considers that the field `val1` can have all values allowed for the `int` type at any point in the code.

```
struct myStruct {
    volatile int val1;
    int val2;
};
```

Even if you write a specific value to `val1` and read the variable in the next operation, the variable read results in any possible value.

```
struct myStruct myStructInstance;
myStructInstance.val1 = 1;
assert (myStructInstance.val1 == 1); // Assertion can fail
```

Off (default)

The verification ignores the `volatile` qualifier on fields of a structure.

In the following example, the verification ignores the qualifier on field `val1`.

```
struct myStruct {
    volatile int val1;
    int val2;
};
```

If you write a specific value to `val1` and read the variable in the next operation, the variable read results in that specific value.

```
struct myStruct myStructInstance;
myStructInstance.val1 = 1;
assert (myStructInstance.val1 == 1); // Assertion passes
```

## Tips

- If your `volatile` fields do not represent values read from hardware and you do not expect their values to change between successive operations, disable this option. You

are using the `volatile` qualifier for some other reason and the verification does not need to consider full range for the field values.

- If you enable this option, the number of red, gray, and green checks in your code can decrease. The number of orange checks can increase.

In the following example, a red or green check changes to orange or a gray check goes away when the option is used. Considering the `volatile` qualifier changes the check color. These examples use the following structure definition:

```
struct myStruct {
    volatile int field1;
    int field2;
};
```

Color Without Option	Result Without Option	Result With Option
Green	<pre>void main(){     struct myStruct structVal;     structVal.field1 = 1;     assert(structVal.field1 == 1); }</pre>	<pre>void main(){     struct myStruct structVal;     structVal.field1 = 1;     1);assert(structVal.field1 ==1); }</pre>
Red	<pre>void main(){     struct myStruct structVal;     structVal.field1 = 1;     assert(structVal.field1 != 1); }</pre>	<pre>void main(){     struct myStruct structVal;     structVal.field1 = 1;     1);assert(structVal.field1 !=1); }</pre>
Gray	<pre>void main(){     struct myStruct structVal;     structVal.field1 = 1;     if (structVal.field1 != 1)     {         /* Perform operation */     } }</pre>	<pre>void main(){     struct myStruct structVal;     structVal.field1 = 1;     if (structVal.field1 != 1)     {         /* Perform operation */     } }</pre>

- In C++ code, the option also applies to class members.

## Command-Line Information

**Parameter:** `-consider-volatile-qualifier-on-fields`

**Default:** Off

**Example:** `polyspace-code-prover-nodesktop -sources file_name -consider-volatile-qualifier-on-fields`

## See Also

### Topics

“Specify External Constraints” (Polyspace Code Prover)

**Introduced in R2016b**

## Float rounding mode (-float-rounding-mode)

Specify rounding modes to consider when determining the results of floating point arithmetic

### Description

*This option affects a Code Prover analysis only.*

Specify the rounding modes to consider when determining the results of floating-point arithmetic.

### Set Option

**User interface:** In your project configuration, the option is available on the **Verification Assumptions** node.

**Command line:** Use the option `-float-rounding-mode`. See “Command-Line Information” on page 1-224.

### Why Use This Option

The default verification uses the `round-to-nearest` mode.

Use the rounding mode `all` if your code contains routines such as `fesetround` to specify a rounding mode other than `round-to-nearest`. Although the verification ignores the `fesetround` specification, it considers all rounding modes including the rounding mode that you specified. Alternatively, for targets that can use extended precision (for instance, using the flag `-mfpmath=387`), use the rounding mode `all`. However, for your Polyspace analysis results to agree with run-time behavior, you must prevent use of extended precision through a flag such as `-ffloat-store`.

Otherwise, continue to use the default rounding mode `to-nearest`. Because all rounding modes are considered when you specify `all`, you can have many orange **Overflow** checks resulting from overapproximation.

## Settings

**Default:** to-nearest

to-nearest

The verification assumes the round-to-nearest mode.

all

The verification assumes all rounding modes for each operation involving floating-point variables. The following rounding modes are considered: round-to-nearest, round-towards-zero, round-towards-positive-infinity, and round-towards-negative-infinity.

## Tips

- The Polyspace analysis uses floating-point arithmetic that conforms to the IEEE® 754 standard. For instance, the arithmetic uses floating point instructions present in the SSE instruction set. The GNU C flag `-mfpmath=sse` enforces use of this instruction set. If you use the GNU C compiler with this flag to compile your code, your Polyspace analysis results agree with your run-time behavior.

However, if your code uses extended precision, for instance using the GNU C flag `-mfpmath=387`, your Polyspace analysis results might not agree with your run-time behavior in some corner cases. See some examples of these corner cases in `codeprover_limitations.pdf` in `matlabroot\polyspace\verifier\code_prover`. Here, `matlabroot` is the MATLAB installation folder, for instance, `C:\Program Files\MATLAB\R2017b`.

To prevent use of extended precision, on targets without SSE support, you can use a flag such as `-ffloat-store`. For your Polyspace analysis, use `all` for rounding mode to account for double rounding.

- The **Overflow** check uses the rounding modes that you specify. For instance, the following table shows the difference in the result of the check when you change your rounding modes.

Rounding mode: to-nearest	Rounding mode: all
<p>If results of floating-point operations are rounded to nearest values:</p> <ul style="list-style-type: none"> <li>In the first addition operation, <code>eps1</code> is just large enough that the value nearest to <code>FLT_MAX + eps1</code> is greater than <code>FLT_MAX</code>. The <b>Overflow</b> check is red.</li> <li>In the second addition operation, <code>eps2</code> is just small enough that the value nearest to <code>FLT_MAX + eps2</code> is <code>FLT_MAX</code>. The <b>Overflow</b> check is green.</li> </ul>	<p>Besides to-nearest mode, the <b>Overflow</b> check also considers other rounding modes.</p> <ul style="list-style-type: none"> <li>In the first addition operation, in to-nearest mode, the value nearest to <code>FLT_MAX + eps1</code> is greater than <code>FLT_MAX</code>, so the addition overflows. But if rounded towards negative infinity, the result is <code>FLT_MAX</code>, so the addition does not overflow. Combining these two rounding modes, the <b>Overflow</b> check is orange.</li> </ul>
<pre>#include &lt;float.h&gt; #define eps1 0x1p103 #define eps2 0x0.FFFFFFFp103  float func(int ch) {     float left_op = FLT_MAX;     float right_op_1 = eps1, \ right_op_2 = eps2;     switch(ch) {         case 1:             return (left_op + \ right_op_1);         case 2:             return (left_op + \ right_op_2);         default:             return 0;     } }</pre>	<ul style="list-style-type: none"> <li>In the second addition operation, in to-nearest mode, the value nearest to <code>FLT_MAX + eps2</code> is <code>FLT_MAX</code>, so the addition does not overflow. But if rounded towards positive infinity, the result is greater than <code>FLT_MAX</code>, so the addition overflows. Combining these two rounding modes, the <b>Overflow</b> check is orange.</li> </ul>
	<pre>#include &lt;float.h&gt; #define eps1 0x1p103 #define eps2 0x0.FFFFFFFp103  float func(int ch) {     float left_op = FLT_MAX;     float right_op_1 = eps1, \ right_op_2 = eps2;     switch(ch) {         case 1:             return (left_op + \ right_op_1);         case 2:             return (left_op + \ right_op_2);</pre>

Rounding mode: to-nearest	Rounding mode: all
	<pre>default:     return 0; }</pre>

If you set the rounding mode to `all` and obtain an orange **Overflow** check, to determine how the overflow can occur, consider all rounding modes.

## Command-Line Information

**Parameter:** `-float-rounding-mode`

**Value:** `to-nearest` | `all`

**Default:** `to-nearest`

**Example:** `polyspace-code-prover-nodesktop -sources file_name -float-rounding-mode all`

## See Also

Overflow

**Introduced in R2016a**

# Respect types in fields (-respect-types-in-fields)

Do not cast nonpointer fields of a structure to pointers

## Description

*This option affects a Code Prover analysis only.*

Specify that structure fields not declared initially as pointers will not be cast to pointers later.

## Set Option

**User interface:** In your project configuration, the option is available on the **Verification Assumptions** node.

**Command line:** Use the option `-respect-types-in-fields`. See “Command-Line Information” on page 1-226.

## Why Use This Option

Use this option to identify and forbid casts from nonpointer structure fields to pointers.

## Settings

On

The verification assumes that structure fields not declared initially as pointers will not be cast to pointers later.

Code with option off	Code with option on
<pre>struct {     unsigned int x1;     unsigned int x2; } S;  void funct(void) {     int var, *tmp;     S.x1 = &amp;var;     tmp = (int*)S.x1;     *tmp = 1;     assert(var==1); }</pre> <p>In this example, the fields of S are declared as integers but S.x1 is cast to a pointer. With the option turned off, Polyspace allows the cast.</p>	<pre>struct {     unsigned int x1;     unsigned int x2; } S;  void funct(void) {     int var, *tmp;     S.x1 = &amp;var;     tmp = (int*)S.x1;     *tmp = 1;     assert(var==1); }</pre> <p>In this example, the fields of S are declared as integers but S.x1 is cast to a pointer. With the option turned on, Polyspace ignores the cast. Therefore, it ignores the initialization of var through the pointer (int*)S.x1 and produces a red <b>Non-initialized local variable</b> error when var is read.</p>

Off (default)

The verification assumes that structure fields can be cast to pointers even when they are not declared as pointers.

## Command-Line Information

**Parameter:** -respect-types-in-fields

**Default:** Off

## See Also

Respect types in global variables (-respect-types-in-globals) | Non-initialized local variable

# Respect types in global variables (-respect-types-in-globals)

Do not cast nonpointer global variables to pointers

## Description

*This option affects a Code Prover analysis only.*

Specify that global variables not declared initially as pointers will not be cast to pointers later.

## Set Option

**User interface:** In your project configuration, the option is available on the **Verification Assumptions** node.

**Command line:** Use the option `-respect-types-in-globals`. See “Command-Line Information” on page 1-228.

## Why Use This Option

Use this option to identify and forbid casts from nonpointer global variables to pointers.

## Settings

On

The verification assumes that global variables not declared initially as pointers will not be cast to pointers later.

Off (default)

The verification assumes that global variables can be cast to pointers even when they are not declared as pointers.

## Tips

If you select this option, the number of checks in your code can change. You can use this option and the change in results to identify cases where you cast nonpointer variables to pointers.

For instance, in the following example, when you select the option, the results have one less orange check and one more red check.

Code with option off	Code with option on
<pre data-bbox="238 588 783 789">int global; void main(void) {     int local;     global = (int)&amp;local;     *(int*)global = 5;     assert(local==5); }</pre> <p data-bbox="238 817 783 911">In this example, <code>global</code> is declared as an <code>int</code> variable but cast to a pointer. With the option turned off, Polyspace allows the cast.</p>	<pre data-bbox="788 588 1334 789">int global; void main(void) {     int local;     global = (int)&amp;local;     *(int*)global = 5;     assert(local==5); }</pre> <p data-bbox="788 817 1334 1072">In this example, <code>global</code> is declared as an <code>int</code> variable but cast to a pointer. With the option turned on, Polyspace ignores the cast. Therefore, it ignores the initialization of <code>local</code> through the pointer <code>(int*)global</code> and produces a red <b>Non-initialized local variable</b> error when <code>local</code> is read.</p>

## Command-Line Information

**Parameter:** `-respect-types-in-globals`

**Default:** Off

## See Also

Respect types in fields (`-respect-types-in-fields`) | Non-initialized local variable

## Consider environment pointers as unsafe (- stubbed-pointers-are-unsafe)

Specify that environment pointers can be unsafe to dereference unless constrained otherwise

### Description

*This option affects a Code Prover analysis only.*

Specify that the verification must consider environment pointers as unsafe unless otherwise constrained. Environment pointers are pointers that can be assigned values outside your code.

Environment pointers include:

- Global or extern pointers.
- Pointers returned from stubbed functions.

A function is stubbed if your code does not contain the function definition or you override a function definition by using the option `Functions to stub (-functions-to-stub)`.

- Pointer parameters of functions whose calls are generated by the software.

A function call is generated if you verify a module or library and the module or library does not have an explicit call to the function. You can also force a function call to be generated with the option `Functions to call (-main-generator-calls)`.

### Set Option

**User interface:** In your project configuration, the option is available on the **Verification Assumptions** node.

**Command line:** Use the option `-stubbed-pointers-are-unsafe`. See “Command-Line Information” on page 1-232.

## Why Use This Option

Use this option so that the verification makes more conservative assumptions about pointers from external sources.

If you specify this option, the verification considers that environment pointers can have a NULL value. If you read an environment pointer without checking for NULL, the **Illegally dereferenced pointer** check shows a potential error in orange. The message associated with the orange check shows the pointer can be NULL.

## Settings

On

The verification considers that environment pointers can have a NULL value.

Off (default)

The verification considers that environment pointers:

- Cannot have a NULL value.
- Points within allowed bounds.

## Tips

- Enable this option during the integration phase. In this phase, you provide complete code for verification. Even if an orange check originates from external sources, you are likely to place protections against unsafe pointers from such sources. For instance, if you obtain a pointer from an unknown source, you check the pointer for NULL value.

Disable this option during the unit testing phase. In this phase, you focus on errors originating from your unit.

- If you are verifying code implementation of AUTOSAR runnables, Code Prover assumes that pointer arguments to runnables and pointers returned from `Rte_` functions are not NULL. You cannot use this option to change the assumption. See “Run Polyspace on AUTOSAR Code with Conservative Assumptions” (Polyspace Code Prover).
- If you enable this option, the number of orange checks in your code might increase.

Environment Pointers Safe	Environment Pointers Unsafe
<p>The <b>Illegally dereferenced pointer</b> check is green. The verification assumes that <code>env_ptr</code> is not NULL and any dereference is within allowed bounds. The verification assumes that the result of the dereference is full range. For instance, in this case, the return value has the full range of type <code>int</code>.</p> <pre>int func (int *env_ptr) {     return *env_ptr; }</pre>	<p>The <b>Illegally dereferenced pointer</b> check is orange. The verification assumes that <code>env_ptr</code> can be NULL.</p> <pre>int func (int *env_ptr) {     return *env_ptr; }</pre>

If you enable this option, the number of gray checks might decrease.

Environment Pointers Safe	Environment Pointers Unsafe
<p>The verification assumes that <code>env_ptr</code> is not NULL. The <code>if</code> condition is always true and the <code>else</code> block is unreachable.</p> <pre>#include &lt;stdlib.h&gt; int func (int *env_ptr) {     if(env_ptr!=NULL)         return *env_ptr;     else         return 0; }</pre>	<p>The verification assumes that <code>env_ptr</code> can be NULL. The <code>if</code> condition is not always true and the <code>else</code> block can be reachable.</p> <pre>#include &lt;stdlib.h&gt; int func (int *env_ptr) {     if(env_ptr!=NULL)         return *env_ptr;     else         return 0; }</pre>

- Instead of considering all environment pointers as safe or unsafe, you can individually constrain some of the environment pointers. See the description of **Initialize Pointer** in “External Constraints for Polyspace Analysis” (Polyspace Code Prover).

When you individually constrain a pointer, you first specify an **Init Mode**, and then specify through the **Initialize Pointer** option whether the pointer is `Null`, `Not Null`, or `Maybe Null`. Depending on the **Init Mode**, you can either override the global specification for all environment pointers or not.

- If you set the **Init Mode** of the pointer to `INIT` or `PERMANENT`, your selection for **Initialize Pointer** overrides your specification for this option. For instance, if you specify `Not NULL` for an environment pointer `ptr`, the verification assumes that

`ptr` is not NULL even if you specify that environment pointers must be considered unsafe.

- If you set the **Init Mode** to MAIN GENERATOR, the verification uses your specification for this option.

For pointers returned from stubbed functions, the option MAIN GENERATOR is not available. If you override the global specification for such a pointer through the **Initialize Pointer** option in constraints, you cannot toggle back to the global specification without changing the **Initialize Pointer** option too.

- If you disable this option, the verification considers that dereferences at all pointer depths are valid.

For instance, all the dereferences are considered valid in this code:

```
int*** stub(void);

void func2() {
    int ***ptr = stub();
    int **ptr2 = *ptr;
    int *ptr3 = *ptr2;
}
```

## Command-Line Information

**Parameter:** `-stubbed-pointers-are-unsafe`

**Default:** Off

**Example:** `polyspace-code-prover-nodesktop -sources file_name -stubbed-pointers-are-unsafe`

## See Also

Constraint setup (`-data-range-specifications`)

## Topics

“Specify External Constraints” (Polyspace Code Prover)

“External Constraints for Polyspace Analysis” (Polyspace Code Prover)

**Introduced in R2016b**

## Allow negative operand for left shifts (-allow-negative-operand-in-shift)

Allow left shift operations on a negative number

### Description

*This option affects a Code Prover analysis only.*

Specify that the verification must allow left shift operations on a negative number.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node.

**Command line:** Use the option `-allow-negative-operand-in-shift`. See “Command-Line Information” on page 1-234.

### Why Use This Option

According to the C99 standard (sec 6.5.7), the result of a left shift operation on a negative number is undefined. Following the standard, the verification produces a red check on left shifts of negative numbers.

If your compiler has a well-defined behavior for left shifts of negative numbers, set this option. Note that allowing left shifts of negative numbers can reduce the cross-compiler portability of your code.

### Settings

On

The verification allows shift operations on a negative number, for instance, `-2 << 2`.

Off (default)

If a shift operation is performed on a negative number, the verification generates an error.

## Command-Line Information

**Parameter:** -allow-negative-operand-in-shift

**Default:** Off

## See Also

Invalid shift operations

# Consider non finite floats (-allow-non-finite-floats)

Enable an analysis mode that incorporates infinities and NaNs

## Description

Enable an analysis mode that incorporates infinities and NaNs for floating point operations.

## Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node.

**Command line:** Use the option `-allow-non-finite-floats`. See “Command-Line Information” on page 1-238.

## Why Use This Option

By default, the analysis does not incorporate infinities and NaNs. For instance, the analysis terminates the execution thread where a division by zero occurs and does not consider that the result could be infinite.

If you use functions such as `isinf` or `isnan` and account for infinities and NaNs in your code, set this option. When you set this option and a division by zero occurs for instance, the execution thread continues with infinity as the result of the division.

Set this option alone if you are sure that you have accounted for infinities and NaNs in your code. Using the option alone effectively disables many numerical checks on floating point operations. If you have generally accounted for infinities and NaNs, but you are not sure that you have considered all situations, set these additional options:

- **Infinities** (`-check-infinite`): Use `warn-first`.
- **NaNs** (`-check-nan`): Use `warn-first`.

If the analysis flags comparisons using `isinf` or `isnan` as dead code, use this option. By default, a Bug Finder analysis does not incorporate infinities and NaNs.

## Settings

On

The analysis allows infinities and NaNs. For instance, in this mode:

- The analysis assumes that floating-point operations can produce results such as infinities and NaNs.

By using options `Infinities (-check-infinite)` and `NaNs (-check-nan)`, you can choose to highlight operations that produce nonfinite results and stop the execution threads where the nonfinite results occur. These options are not available for a Bug Finder analysis.

- The analysis assumes that floating-point variables with unknown values can have any value allowed by their type, including infinite or NaN. Floating-point variables with unknown values include volatile variables and return values of stubbed functions.

Off (default)

The analysis does not allow infinities and NaNs. For instance, in this mode:

- The Code Prover analysis produces a red check on a floating-point operation that produces an infinity or a NaN as the only possible result on all execution paths. The verification produces an orange check on a floating-point operation that can potentially produce an infinity or NaN.
- The Code Prover analysis assumes that floating-point variables with unknown values are full-range but finite.
- The Bug Finder analysis shows comparisons with infinity using `isinf` as dead code.

## Tips

- The IEEE 754 Standard allows special quantities such as infinities and NaN so that you can handle certain numerical exceptions without aborting the code. Some implementations of the C standard support infinities and NaN.
- If your compiler supports infinities and NaNs and you account for them explicitly in your code, use this option so that the verification also allows them.

For instance, if a division results in infinity, in your code, you specify an alternative action. Therefore, you do not want the verification to highlight division operations that result in infinity.

- If your compiler supports infinities and NaNs but you are not sure if you account for them explicitly in your code, use this option so that the verification incorporates infinities and NaNs. Use the options `-check-nan` and `-check-infinite` with argument `warn` so that the verification highlights operations that result in infinities and NaNs, but does not stop the execution thread. These options are not available for a Bug Finder analysis.
- If you run a Bug Finder analysis and use this option:
  - The checkers for overflow and division by zero are disabled. See “Numerical Defects”.
  - The checker `Floating point comparison with equality operators` can show false positives.
- If you select this option, the number and type of Code Prover checks in your code can change.

For instance, in the following example, when you select the option, the results have one less red check and three more green checks.

Infinities and NaNs Not Allowed	Infinities and NaNs Allowed
<p>Code Prover produces a <b>Division by zero</b> error and stops verification.</p> <pre data-bbox="319 390 630 564"> double func(void) {     double x=1.0/0.0;     double y=1.0/x;     double z=x-x;     return z; } </pre>	<p>If you select this option, Code Prover does not check for a <b>Division by zero</b> error.</p> <pre data-bbox="828 425 1135 598"> double func(void) {     double x=1.0/0.0;     double y=1.0/x;     double z=x-x;     return z; } </pre> <p>The analysis assumes that dividing by zero results in:</p> <ul data-bbox="838 703 1164 824" style="list-style-type: none"> <li>• Value of x equal to Inf</li> <li>• Value of y equal to 0.0</li> <li>• Value of z equal to NaN</li> </ul> <p>In your analysis results in the Polyspace user interface, if you place your cursor on y and z, you can see the nonfinite values Inf and NaN respectively in the tooltip.</p>

- You cannot run the Automatic Orange Tester in Code Prover if you incorporate non-finites in your analysis.

## Command-Line Information

**Parameter:** -allow-non-finite-floats

**Default:** Off

## See Also

Infinities (-check-infinite) | NaNs (-check-nan) | Division by zero | Overflow | Invalid shift operations | Invalid use of standard library routine

## **Topics**

“Specify Polyspace Analysis Options” (Polyspace Code Prover)

**Introduced in R2016a**

## Infinites (-check-infinite)

Specify how to handle floating-point operations that result in infinity

### Description

*This option affects a Code Prover analysis only.*

Specify how the analysis must handle floating-point operations that result in infinities.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node. See “Dependencies” on page 1-242 for other options you must also enable.

**Command line:** Use the option `-check-infinite`. See “Command-Line Information” on page 1-242.

### Why Use This Option

Use this option to enable detection of floating-point operations that result in infinities.

If you specify that the analysis must consider nonfinite floats, by default, the analysis does not flag these operations. Use this option to detect these operations while still incorporating nonfinite floats.

### Settings

**Default:** allow

allow

The verification does not produce a check on the operation.

For instance, in the following code, there is no **Overflow** check.

```
double func(void) {  
    double x=1.0/0.0;
```

```
    return x;  
}
```

### warn-first

The verification produces a check on the operation. The check determines if the result of the operation is infinite when the operands themselves are not infinite. The verification does not terminate the execution thread that produces infinity.

If the verification detects an operation that produces infinity as the only possible result on all execution paths and the operands themselves are never infinite, the check is red. If the operation can potentially result in infinity, the check is orange.

For instance, in the following code, there is a nonblocking **Overflow** check for infinity.

```
double func(void) {  
    double x=1.0/0.0;  
    return x;  
}
```

Even though the **Overflow** check on the / operation is red, the verification continues. For instance, a green **Non-initialized local variable** check appears on x in the return statement.

### forbid

The verification produces a check on the operation and terminates the execution thread that produces infinity.

If the check is red, the verification does not continue for the remaining code in the same scope as the check. If the check is orange, the verification continues but removes from consideration the variable values that produced infinity.

For instance, in the following code, there is a blocking **Overflow** check for infinity.

```
double func(void) {  
    double x=1.0/0.0;  
    return x;  
}
```

The verification stops because the **Overflow** check on the / operation is red. For instance, a **Non-initialized local variable** check does not appear on x in the return statement.

## Dependencies

To use this option, you must enable the verification mode that incorporates infinities and NaNs. See `Consider non finite floats (-allow-non-finite-floats)`.

## Command-Line Information

**Parameter:** `-check-infinite`

**Value:** `allow|warn-first|forbid`

**Default:** `allow`

**Example:** `polyspace-code-prover-nodesktop -sources file_name -check-infinite forbid`

## See Also

### Polyspace Analysis Options

`Consider non finite floats (-allow-non-finite-floats)|NaNs (-check-nan)`

### Polyspace Results

`Overflow`

**Introduced in R2016a**

## NaNs (-check-nan)

Specify how to handle floating-point operations that result in NaN

### Description

*This option affects a Code Prover analysis only.*

Specify how the analysis must handle floating-point operations that result in NaN.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node. See “Dependencies” on page 1-245 for other options you must also enable.

**Command line:** Use the option `-check-nan`. See “Command-Line Information” on page 1-245.

### Why Use This Option

Use this option to enable detection of floating-point operations that result in NaN-s.

If you specify that the analysis must consider nonfinite floats, by default, the analysis does not flag these operations. Use this option to detect these operations while still incorporating nonfinite floats.

### Settings

**Default:** allow

allow

The verification does not produce a check on the operation.

For instance, in the following code, there is no **Invalid operation on floats** check.

```
double func(void) {  
    double x=1.0/0.0;
```

```
    double y=x-x;
    return y;
}
```

## warn-first

The verification produces a check on the operation. The check determines if the result of the operation is NaN when the operands themselves are not NaN. For instance, the check flags the operation `val1 + val2` only if the result can be NaN when *both* `val1` and `val2` are not NaN. The verification does not terminate the execution thread that produces NaN.

If the verification detects an operation that produces NaN as the only possible result on all execution paths and the operands themselves are never NaN, the check is red. If the operation can potentially result in NaN, the check is orange.

For instance, in the following code, there is a nonblocking **Invalid operation on floats** check for NaN.

```
double func(void) {
    double x=1.0/0.0;
    double y=x-x;
    return y;
}
```

Even though the **Invalid operation on floats** check on the `-` operation is red, the verification continues. For instance, a green **Non-initialized local variable** check appears on `y` in the return statement.

## forbid

The verification produces a check on the operation and terminates the execution thread that produces NaN.

If the check is red, the verification does not continue for the remaining code in the same scope as the check. If the check is orange, the verification continues but removes from consideration the variable values that produced a NaN.

For instance, in the following code, there is a blocking **Invalid operation on floats** check for NaN.

```
double func(void) {
    double x=1.0/0.0;
    double y=x-x;
}
```

```
    return y;  
}
```

The verification stops because the **Invalid operation on floats** check on the - operation is red. For instance, a **Non-initialized local variable** check does not appear on `y` in the return statement.

The **Invalid operation on floats** check for NaN also appears on the / operation and is green.

## Dependencies

To use this option, you must enable the verification mode that incorporates infinities and NaNs. See `Consider non finite floats (-allow-non-finite-floats)`.

## Command-Line Information

**Parameter:** -check-nan

**Value:** allow|warn-first|forbid

**Default:** allow

**Example:** `polyspace-code-prover-nodesktop -sources file_name -check-nan forbid`

## See Also

### Polyspace Analysis Options

`Consider non finite floats (-allow-non-finite-floats)` | `Infinities (-check-infinite)`

### Polyspace Results

`Invalid operation on floats`

### Introduced in R2016a

## Enable pointer arithmetic across fields (-allow-ptr-arith-on-struct)

Allow arithmetic on pointer to a structure field so that it points to another field

### Description

*This option affects a Code Prover analysis only.*

Specify that a pointer assigned to a structure field can point outside its bounds as long as it points within the structure.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node. See “Dependency” on page 1-247 for other options you must also enable.

**Command line:** Use the option `-allow-ptr-arith-on-struct`. See “Command-Line Information” on page 1-248.

### Why Use This Option

Use this option to relax the check for illegally dereferenced pointers. Once you assign a pointer to a structure field, you can perform pointer arithmetic and use the result to access another structure field.

### Settings

On

A pointer assigned to a structure field can point outside the bounds imposed by the field as long as it points within the structure. For instance, in the following code, unless you use this option, the verification will produce a red **Illegally dereferenced pointer** check:

```
void main(void) {
    struct S {char a; char b; int c;} x;
    char *ptr = &x.b;
    ptr ++;
    *ptr = 1; // Red on the dereference, because ptr points outside x.b
}
```

Off (default)

A pointer assigned to a structure field can point only within the bounds imposed by the field.

## Tips

- The verification does not allow a pointer with negative offset values. This behavior occurs irrespective of whether you choose the option **Enable pointer arithmetic across fields**.
- Using this option can slightly increase the number of orange checks. The option relaxes the constraint that a pointer to a structure field cannot point to other fields of the structure. In exchange for relaxing this constraint, the verification loses precision on the boundary of fields within a structure and treats the structure as a whole. Pointer dereferences that were previously green can now turn orange.

Use this option if you follow a policy of reviewing red checks only and you need to work around red checks from pointer arithmetic within a structure.

- Before using this option, consider the costs of using pointer arithmetic across different fields of a structure.

Unlike an array, members of a structure can have different data types. For efficient storage, structures use padding to accommodate this difference. When you increment a pointer pointing to a structure member, you might not point to the next member. When you dereference this pointer, you cannot rely on what you are reading or writing to.

## Dependency

This option is available only if you set `Source code language (-lang)` to C.

## Command-Line Information

**Parameter:** `-allow-ptr-arith-on-struct`

**Default:** Off

**Example:** `polyspace-code-prover-nodesktop -sources file_name -allow-ptr-arith-on-struct`

## See Also

Allow incomplete or partial allocation of structures (`-size-in-bytes`) | Illegally dereferenced pointer

# Detect stack pointer dereference outside scope (-detect-pointer-escape)

Find cases where a function returns a pointer to one of its local variables

## Description

*This option affects a Code Prover analysis only.*

Specify that the verification must detect cases where you access a variable outside its scope via pointers. Such an access can happen, for example, when a function returns a pointer to a local variable and you dereference the pointer outside the function. The dereference causes undefined behavior because the local variable that the pointer points to does not live outside the function.

## Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node.

**Command line:** Use the option `-detect-pointer-escape`. See “Command-Line Information” on page 1-251.

## Why Use This Option

Use this option to enable detection of pointer escape.

## Settings

On

The **Illegally dereferenced pointer** check performs an additional task, besides its usual specifications. When you dereference a pointer, the check also determines if you are accessing a variable outside its scope through the pointer. The check is:

- Red, if all the variables that the pointer points to are accessed outside their scope.

For instance, you dereference a pointer `ptr` in a function `func` that is called twice in your code. In both calls, when you perform the dereference `*ptr`, `ptr` is pointing to variables outside their scope. Therefore, the **Illegally dereferenced pointer** check is red.

- Orange, if only some of the variables that the pointer points to are accessed outside their scope.
- Green, if none of the variables that the pointer points to are accessed outside their scope, and other requirements of the check are also satisfied.

In the following code, if you enable this option, Polyspace Code Prover produces a red **Illegally dereferenced pointer** check on `*ptr`. Otherwise, the **Illegally dereferenced pointer** check on `*ptr` is green.

```
void func2(int *ptr) {
    *ptr = 0;
}

int* func1(void) {
    int ret = 0;
    return &ret ;
}

void main(void) {
    int* ptr = func1() ;
    func2(ptr) ;
}
```

The **Result Details** pane displays a message indicating that `ret` is accessed outside its scope.

 **ID 1: Illegally dereferenced pointer**

Error: pointer is outside its bounds

This check may be a path-related issue, which is not dependent on input values

Dereference of parameter 'ptr' (pointer to int 32, size: 32 bits):

Pointer is not null.

Points to 4 bytes at offset 0 in buffer of 4 bytes, so is within bounds (if memory is allocated).

Pointer may point to variable or field of variable:

'ret', local to function 'func1'. 'ret' is accessed outside its scope.

Off (default)

When you dereference a pointer, the **Illegally dereferenced pointer** check does not check for whether you are accessing a variable outside its scope. The check is green even if the pointer dereference is outside the variable scope, as long as it satisfies requirements:

- The pointer is not NULL.
- The pointer points within the memory buffer.

## Command-Line Information

**Parameter:** -detect-pointer-escape

**Default:** Off

## See Also

Illegally dereferenced pointer

**Introduced in R2015a**

## Disable checks for non-initialization (-disable-initialization-checks)

Disable checks for non-initialized variables and pointers

### Description

*This option affects a Code Prover analysis only.*

Specify that Polyspace Code Prover must not check for non-initialization in your code.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node.

**Command line:** Use the option `-disable-initialization-checks`. See “Command-Line Information” on page 1-254.

### Why Use This Option

Use this option if you do not want to detect instances of non-initialized variables.

### Settings

On

Polyspace Code Prover does not perform the following checks:

- `Non-initialized local variable`: Local variable is not initialized before being read.
- `Non-initialized variable`: Variable other than local variable is not initialized before being read.
- `Non-initialized pointer`: Pointer is not initialized before being read.

- **Return value not initialized:** C function does not return value when expected.

Polyspace assumes that, at declaration:

- Variables have full-range of values allowed by their type.
- Pointers can be NULL-valued or point to a memory block at an unknown offset.

Off (default)

Polyspace Code Prover checks for non-initialization in your code. The software displays red checks if, for instance, a variable is not initialized and orange checks if a variable is initialized only on some execution paths.

## Tips

- If you select this option, the software does not report most violations of MISRA C: 2004 (Polyspace Code Prover), rule 9.1, and MISRA C:2012 Rule 9.1.
- If you select this option, the number and type of orange checks in your code can change.

For instance, the following table shows an additional orange check with the option enabled.

Checks for Non-initialization Enabled	Checks for Non-initialization Disabled
<pre>void func(int flag) {     int var1,var2;     if( flag==0) {         var1=var2;     }     else {         var1=0;     }     var2=var1 + 1; }</pre> <p>In this example, the software produces:</p> <ul style="list-style-type: none"> <li>• A red <b>Non-initialized local variable</b> check on var2 in the if branch. The verification continues as if only the else branch of the if statement exists.</li> <li>• A green <b>Non-initialized local variable</b> check on var1 in the last statement. var1 has the assigned value 0.</li> <li>• A green <b>Overflow</b> check on the + operation.</li> </ul>	<pre>void func(int flag) {     int var1,var2;     if( flag==0) {         var1=var2;     }     else {         var1=0;     }     var2=var1 + 1; }</pre> <p>In this example, the software:</p> <ul style="list-style-type: none"> <li>• Does not produce <b>Non-initialized local variable</b> checks. At initialization, the software assumes that var2 has full range of int values. Following the if statement, because the software considers both if branches, it assumes that var1 also has full range of int values.</li> <li>• Produces an orange <b>Overflow</b> check on the + operation. For instance, if var1 has the maximum int value, adding 1 to it can cause an overflow.</li> </ul>

## Command-Line Information

**Parameter:** -disable-initialization-checks

**Default:** Off

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -disable-initialization-checks

## See Also

## Permissive function pointer calls (-permissive-function-pointer)

Allow type mismatch between function pointers and the functions they point to

### Description

*This option affects a Code Prover analysis only.*

Specify that the verification must allow function pointer calls where the type of the function pointer does not match the type of the function.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node. See “Dependency” on page 1-258 for other options you must also enable.

**Command line:** Use the option -permissive-function-pointer. See “Command-Line Information” on page 1-258.

### Why Use This Option

By default, Code Prover does not recognize calls through function pointers when a type mismatch occurs. Fix the type mismatch whenever possible.

Use this option if:

- You cannot fix the type mismatch, and
- The analysis does not cover a significant portion of your code because calls via function pointers are not recognized.

### Settings

On

The verification must allow function pointer calls where the type of the function pointer does not match the type of the function. For instance, a function declared as

`int f(int*)` can be called by a function pointer declared as `int (*fptr)(void*)`.

Only type mismatches between pointer types are allowed. Type mismatches between nonpointer types cause compilation errors. For instance, a function declared as `int f(int)` cannot be called by a function pointer declared as `int (*fptr)(double)`.

Off (default)

The verification must require that the argument and return types of a function pointer and the function it calls are identical.

Type mismatches are detected with the `check Correctness` condition.

## Tips

- With sources that use function pointers extensively, enabling this option can cause loss in performance. This loss occurs because the verification has to consider more execution paths.
- Using this option can increase the number of orange checks. Some of these orange checks can reveal a real issue with the code.

Consider these examples where a type mismatch occurs between the function pointer type and the function that it points to:

- In this example, the function pointer `obj_fptr` has an argument that is a pointer to a three-element array. However, it points to a function whose corresponding argument is a pointer to a four-element array. In the body of `foo`, four array elements are read and incremented. The fourth element does not exist and the `++` operation reads a meaningless value.

```
typedef int array_three_elements[3];
typedef void (*fptr)(array_three_elements*);

typedef int array_four_elements[4];
void foo(array_four_elements*);

void main() {
    array_three_elements arr[3] = {0,0,0};
    array_three_elements *ptr;
    fptr obj_fptr;

    ptr = &arr;
    obj_fptr = &foo;

    //Call via function pointer
    obj_fptr(&ptr);
}

void foo(array_four_elements* x) {
    int i = 0;
    int *current_pos;

    for(i = 0; i < 4; i++) {
        current_pos = (*x) + i;
        (*current_pos)++;
    }
}
```

Without this option, an orange `Correctness` condition check appears on the call `obj_fptr(&ptr)` and the function `foo` is not verified. If you use this option, the body of `foo` contains several orange checks. Review the checks carefully and make sure that the type mismatch does not cause issues.

- In this example, the function pointer has an argument that is a pointer to a structure with three `float` members. However, the corresponding function argument is a pointer to an unrelated structure with one array member. In the function body, the `strlen` function is used assuming the array member. Instead the `strlen` call reads the `float` members and can read meaningless values, for instance, values stored in the structure padding.

```
#include <string.h>
struct point {
    float x;
    float y;
    float z;
};
struct message {
    char msg[10] ;
};
void foo(struct message*);

void main() {
    struct point pt = {3.14, 2048.0, -1.0} ;
    void (*obj_fptr)(struct point *) ;

    obj_fptr = &foo;

    //Call via function pointer
    obj_fptr(&pt);
}

void foo(struct message* x) {
    int y = strlen(x->msg) ;
}
```

Without this option, an orange `Correctness` condition check appears on the call `obj_fptr(&pt)` and the function `foo` is not verified. If you use this option, the function contains an orange check on the `strlen` call. Review the check carefully and make sure that the type mismatch does not cause issues.

## Dependency

This option is available only if you set `Source code language (-lang)` to `C`.

## Command-Line Information

**Parameter:** `-permissive-function-pointer`

**Default:** `Off`

**Example:** `polyspace-code-prover-nodesktop -sources file_name -lang c -permissive-function-pointer`

## **See Also**

Correctness condition

## Overflow mode for signed integer (-signed-integer-overflows)

Specify whether result of overflow is wrapped around or truncated

### Description

*This option affects a Code Prover analysis only.*

Specify whether Polyspace flags signed integer overflows and whether the analysis wraps the result of an overflow or restricts it to its extremum value.

### Set Option

**User interface:** In the **Configuration** pane, the option is on the **Check Behavior** node under **Code Prover Verification**.

**Command line:** Use the option `-signed-integer-overflows`. See “Command-Line Information” (Polyspace Code Prover).

### Why Use This Option

Use this option to specify whether to check for signed integer overflows and to specify the assumptions the analysis makes following an overflow.

### Settings

**Default:** forbid

forbid

Polyspace flags signed integer overflows. If the **Overflow** check on an operation is:

- Red, Polyspace does not analyze the remaining code in the current scope.
- Orange, Polyspace analyzes the remaining code in the current scope. Polyspace considers that:

- After a positive **Overflow**, the result of the operation has an upper bound. This upper bound is the maximum value allowed by the type of the result.
- After a negative **Overflow**, the result of the operation has a lower bound. This lower bound is the minimum value allowed by the type of the result.

This behavior conforms to the ANSI C (ISO C++) standard.

In the following code, `j` has values in the range  $[1..2^{31}-1]$  before the orange overflow. Polyspace considers that `j` has even values in the range  $[2..2147483646]$  after the overflow. Polyspace does not analyze the `printf()` statement after the red overflow.

```
#include<stdio.h>

int getVal();

void func1()
{
    int i = 1;
    i = i << 30;
    // Result of * operation overflows
    i = i * 2;
    // Remaining code in current scope not analyzed
    printf("%d", i);
}

void func2()
{
    int j = getVal();
    if (j > 0) {
        // Range of j: [1..231-1]
        // Result of * operation may overflow
        j = j * 2;
        // Range of j: even values in [2 .. 2147483646]
        printf("%d", j);
    }
}
```

allow

Polyspace does not flag signed integer overflows. If an operation results in an overflow, Polyspace analyzes the remaining code but wraps the result of the overflow.

In this code, the analysis does not flag any overflow in the code. However, the range of  $j$  wraps around to even values in the range  $[-2^{31}..2]$  or  $[2..2^{31}-2]$  and the value of  $i$  wraps around to  $-2^{31}$ .

```
#include<stdio.h>

int getVal();

void func1()
{
    int i = 1;
    i = i << 30;
    // i = 230
    i = i * 2;
    // i = -231
    printf("%d", i);
}

void func2()
{
    int j = getVal();
    if (j > 0) {
        // Range of j: [1..231-1]
        j = j * 2;
        // Range of j: even values in [-231..2] or [2..231-2]
        printf("%d", j);
    }
}
```

#### warn-with-wrap-around

Polyspace flags signed integer overflows. If an operation results in an overflow, Polyspace analyzes the remaining code but wraps the result of the overflow.

In the following code,  $j$  has values in the range  $[1..2^{31}-1]$  before the orange overflow. Polyspace considers that  $j$  has even values in the range  $[-2^{31}..2]$  or  $[2..2^{31}-2]$  after the overflow.

Similarly,  $i$  has value  $2^{30}$  before the red overflow and value  $-2^{31}$  after it .

```
#include<stdio.h>

int getVal();

void func1()
{
    int i = 1;
    i = i << 30;
    // i = 230
    // Result of * operation overflows
    i = i * 2;
    // i = -231
    printf("%d", i);
}

void func2()
{
    int j = getVal();
    if (j > 0) {
        // Range of j: [1..231-1]
        // Result of * operation may overflow
        j = j * 2;
        // Range of j: even values in [-231..2] or [2..231-2]
        printf("%d", j);
    }
}
```

## Tips

- To check for overflows on conversions from unsigned to signed integers of the same size, set **Overflow mode for unsigned integer** to **forbid** or **warn-with-wrap-around**. If you allow unsigned integer overflows, Polyspace does not flag overflows on conversions and wraps the result of an overflow, even if you check for signed integer overflows.
- In Polyspace Code Prover, overflowing signed constants are wrapped around. This behavior cannot be changed by using the options. If you want to detect overflows with signed constants, use the Polyspace Bug Finder checker **Integer constant overflow**.

## Command-Line Information

**Parameter:** `-signed-integer-overflows`

**Value:** `forbid|allow|warn-with-wrap-around`

**Default:** `forbid`

**Example:** `polyspace-code-prover-nodesktop -sources file_name -signed-integer-overflows allow`

## See Also

`Overflow|Overflow mode for unsigned integer (-unsigned-integer-overflows)`

**Introduced in R2018b**

# Overflow mode for unsigned integer (-unsigned-integer-overflows)

Specify whether result of overflow is wrapped around or truncated

## Description

*This option affects a Code Prover analysis only.*

Specify whether Polyspace flags unsigned integer overflows and whether the analysis wraps the result of an overflow or restricts it to its extremum value.

## Set Option

**User interface:** In the **Configuration** pane, the option is on the **Check Behavior** node under **Code Prover Verification**.

**Command line:** Use the option `-unsigned-integer-overflows`. See “Command-Line Information” (Polyspace Code Prover).

## Why Use This Option

Use this option to specify whether to check for unsigned integer overflows and to specify the assumptions the analysis makes following an overflow.

## Settings

**Default:** allow

forbid

Polyspace flags unsigned integer overflows. If the **Overflow** check on an operation is:

- Red, Polyspace does not analyze the remaining code in the current scope.
- Orange, Polyspace analyzes the remaining code in the current scope. Polyspace considers that:

- After a positive **Overflow**, the result of the operation has an upper bound. This upper bound is the maximum value allowed by the type of the result.
- After a negative **Overflow**, the result of the operation has a lower bound. This lower bound is the minimum value allowed by the type of the result.

In the following code, `j` has values in the range  $[1..2^{32}-1]$  before the orange overflow. Polyspace considers that `j` has even values in the range  $[2 .. 4294967294]$  after the overflow. Polyspace does not analyze the `printf()` statement after the red overflow.

```
#include<stdio.h>

unsigned int getVal();

void func1()
{
    unsigned int i = 1;
    i = i << 31;
    // Result of * operation overflows
    i = i * 2;
    // Remaining code in current scope not analyzed
    printf("%u", i);
}

void func2()
{
    unsigned int j = getVal();
    if (j > 0) {
        // Range of j: [1..232-1]
        // Result of * operation may overflow
        j = j * 2;
        // Range of j: even values in [2 .. 4294967294]
        printf("%u", j);
    }
}
```

allow

Polyspace does not flag unsigned integer overflows. If an operation results in an overflow, Polyspace analyzes the remaining code but wraps the result of the overflow. For instance, `MAX_INT + 1` wraps to `MIN_INT`. This behavior conforms to the ANSI C (ISO C++) standard.

In this code, the analysis does not flag any overflow in the code. However, the range of  $j$  wraps around to even values in the range  $[0 \dots 2^{32}-2]$  and the value of  $i$  wraps around to 0.

```
#include<stdio.h>

unsigned int getVal();

void func1()
{
    unsigned int i = 1;
    i = i << 31;
    // i = 231
    i = i * 2;
    // i = 0
    printf("%u", i);
}

void func2()
{
    unsigned int j = getVal();
    if (j > 0) {
        // Range of j: [1..232-1]
        j = j * 2;
        // Range of j: even values in [0 .. 4294967294]
        printf("%u", j);
    }
}
```

#### warn-with-wrap-around

Polyspace flags unsigned integer overflows. If an operation results in an overflow, Polyspace analyzes the remaining code but wraps the result of the overflow. For instance,  $\text{MAX\_INT} + 1$  wraps to  $\text{MIN\_INT}$ .

In the following code,  $j$  has values in the range  $[1 \dots 2^{32}-1]$  before the orange overflow. Polyspace considers that  $j$  has even values in the range  $[0 \dots 4294967294]$  after the overflow.

Similarly,  $i$  has value  $2^{31}$  before the red overflow and value 0 after it.

```
#include<stdio.h>

unsigned int getVal();

void func1()
{
    unsigned int i = 1;
    i = i << 31;
    // i = 231
    i = i * 2;
    // i = 0
    printf("%u", i);
}

void func2()
{
    unsigned int j = getVal();
    if (j > 0) {
        // Range of j: [1..232-1]
        j = j * 2;
        // Range of j: even values in [0 .. 4294967294]
        printf("%u", j);
    }
}
```

## Tips

- To check for overflows on conversions from unsigned to signed integers of the same size, set **Overflow mode for unsigned integer** to `forbid` or `warn-with-wrap-around`. If you allow unsigned integer overflows, Polyspace does not flag overflows on conversions and wraps the result of an overflow, even if you check for signed integer overflows.
- In Polyspace Code Prover, overflowing unsigned constants are wrapped around. This behavior cannot be changed by using the options. If you want to detect overflows with unsigned constants, use the Polyspace Bug Finder checker `Unsigned integer constant overflow`.

## Command-Line Information

**Parameter:** `-unsigned-integer-overflows`

**Value:** forbid | allow | warn-with-wrap-around

**Default:** allow

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -  
unsigned-integer-overflows allow

## See Also

Overflow | Overflow mode for signed integer (-signed-integer-overflows)

**Introduced in R2018b**

## Allow incomplete or partial allocation of structures (-size-in-bytes)

Allow a pointer with insufficient memory buffer to point to a structure

### Description

*This option affects a Code Prover analysis only.*

Specify that the verification must allow dereferencing a pointer that points to a structure but has a sufficient buffer for only some of the structure's fields.

This type of pointer results when a pointer to a smaller structure is cast to a pointer to a larger structure. The pointer resulting from the cast has sufficient buffer for only some fields of the larger structure.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node.

**Command line:** Use the option `-size-in-bytes`. See "Command-Line Information" on page 1-272.

### Why Use This Option

Use this option to relax the check for illegally dereferenced pointers. You can point to a structure even when the buffer allowed for the pointer is not sufficient for all the structure fields.

## Settings

On

When a pointer with insufficient buffer is dereferenced, Polyspace does not produce an **Illegally dereferenced pointer** error, as long as the dereference occurs within allowed buffer.

For instance, in the following code, the pointer `p` has sufficient buffer for the first two fields of the structure `BIG`. Therefore, with the option on, Polyspace considers that the first two dereferences are valid. The third dereference takes `p` outside its allowed buffer. Therefore, Polyspace produces an **Illegally dereferenced pointer** error on the third dereference.

```
#include <stdlib.h>

typedef struct _little { int a; int b; } LITTLE;
typedef struct _big { int a; int b; int c; } BIG;

void main(void) {
    BIG *p = malloc(sizeof(LITTLE));

    if (p!= ((void *) 0) ) {
        p->a = 0 ;
        p->b = 0 ;
        p->c = 0 ;    // Red IDP check
    }
}
```

Off (default)

Polyspace does not allow dereferencing a pointer to a structure if the pointer does not have sufficient buffer for all fields of the structure. It produces an **Illegally dereferenced pointer** error the first time you dereference the pointer.

For instance, in the following code, even though the pointer `p` has sufficient buffer for the first two fields of the structure `BIG`, Polyspace considers that dereferencing `p` is invalid.

```
#include <stdlib.h>

typedef struct _little { int a; int b; } LITTLE;
typedef struct _big { int a; int b; int c; } BIG;
```

```
void main(void) {
    BIG *p = malloc(sizeof(LITTLE));

    if (p!= ((void *) 0) ) {
        p->a = 0 ;    // Red IDP check
        p->b = 0 ;
        p->c = 0 ;
    }
}
```

### Tips

- If you do not turn on this option, you cannot point to the field of a partially allocated structure.

For instance, in the preceding example, if you do not turn on the option and perform the assignment

```
int *ptr = &(p->a);
```

Polyspace considers that the assignment is invalid. If you dereference `ptr`, it produces an **Illegally dereferenced pointer** error.

- Using this option can slightly increase the number of orange checks.

### Command-Line Information

**Parameter:** `-size-in-bytes`

**Default:** Off

**Example:** `polyspace-code-prover-nodesktop -sources file_name -size-in-bytes`

### See Also

Enable pointer arithmetic across fields (`-allow-ptr-arith-on-struct`)  
| Illegally dereferenced pointer

## Subnormal detection mode (-check-subnormal)

Detect operations that result in subnormal floating-point values

### Description

*This option affects a Code Prover analysis only.*

Specify that the verification must check floating-point operations for subnormal results.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node.

**Command line:** Use the option -check-subnormal. See “Command-Line Information” on page 1-276.

### Why Use This Option

Use this option to detect floating-point operations that result in subnormal values.

Subnormal numbers have magnitudes less than the smallest floating-point number that can be represented without leading zeros in the significand. The presence of subnormal numbers indicates loss of significant digits. This loss can accumulate over subsequent operations and eventually result in unexpected values. Subnormal numbers can also slow down the execution on targets without hardware support.

### Settings

**Default:** allow

allow

The verification does not check operations for subnormal results.

### `forbid`

The verification checks for subnormal results.

The verification stops the execution path with the subnormal result and prevents subnormal values from propagating further. Therefore, in practice, you see only the first occurrence of the subnormal value.

### `warn-all`

The verification checks for subnormal results and highlights all occurrences of subnormal values. Even if a subnormal result comes from previous subnormal values, the result is highlighted.

The verification continues even if the check is red.

### `warn-first`

The verification checks for subnormal results but only highlights first occurrences of subnormal values. If a subnormal value propagates to further subnormal results, those subsequent results are not highlighted.

The verification continues even if the check is red.

For details of the result colors in each mode, see `Subnormal float`.

## Tips

- If you want to see only those operations where a subnormal value originates from non-subnormal operands, use the `warn-first` mode.

For instance, in the following code, `arg1` and `arg2` are unknown. The verification assumes that they can take all values allowed for the type `double`. This assumption can lead to subnormal results from certain operations. If you use the `warn-first` mode, the first operation causing the subnormal result is highlighted.

warn-all	warn-first
<pre data-bbox="319 303 823 494">void func (double arg1, double arg2) {     double difference1 = arg1 - arg2;     double difference2 = arg1 - arg2;     double val1 = difference1 * 2;     double val2 = difference2 * 2; }</pre> <p data-bbox="319 555 823 651">In this example, all four operations can have subnormal results. The four checks for subnormal results are orange.</p>	<pre data-bbox="823 303 1335 494">void func (double arg1, double arg2) {     double difference1 = arg1 - arg2;     double difference2 = arg1 - arg2;     double val1 = difference1 * 2;     double val2 = difference2 * 2; }</pre> <p data-bbox="823 529 1335 815">In this example, <code>difference1</code> and <code>difference2</code> can be subnormal if <code>arg1</code> and <code>arg2</code> are sufficiently close. The first two checks for subnormal results are orange. <code>val1</code> and <code>val2</code> cannot be subnormal unless <code>difference1</code> and <code>difference2</code> are subnormal. The last two checks for subnormal results are green.</p> <p data-bbox="823 841 1335 1032">Through red/orange checks, you see only the first instance where a subnormal value appears. You do not see red/orange checks from those subnormal values propagating to subsequent operations.</p>

- If you want to see where a subnormal value originates and do not want to see subnormal results arising from the same cause more than once, use the `forbid` mode.

For instance, in the following code, `arg1` and `arg2` are unknown. The verification assumes that they can take all values allowed for the type `double`. This assumption can lead to subnormal results for `arg1 - arg2`. If you use the `forbid` mode and perform the operation `arg1 - arg2` twice in succession, only the first operation is highlighted. The second operation is not highlighted because the subnormal result for the second operation arises from the same cause as the first operation.

warn-all	forbid
<pre>void func (double arg1, double arg2) {     double difference1 = arg1 - arg2;     double difference2 = arg1 - arg2;     double val1 = difference1 * 2;     double val2 = difference2 * 2; }</pre> <p>In this example, all four operations can have subnormal results. The four checks for subnormal results are orange.</p>	<pre>void func (double arg1, double arg2) {     double difference1 = arg1 - arg2;     double difference2 = arg1 - arg2;     double val1 = difference1 * 2;     double val2 = difference2 * 2; }</pre> <p>In this example, <code>difference1</code> can be subnormal if <code>arg1</code> and <code>arg2</code> are sufficiently close. The first check for subnormal results is orange. Following this check, the verification excludes from consideration:</p> <ul style="list-style-type: none"> <li>The close values of <code>arg1</code> and <code>arg2</code> that led to the subnormal value of <code>difference1</code>.</li> </ul> <p>In the subsequent operation <code>arg1 - arg2</code>, the check is green and <code>difference2</code> is not subnormal. The result of the check on <code>difference2 * 2</code> is green for the same reason.</p> <ul style="list-style-type: none"> <li>The subnormal value of <code>difference1</code>.</li> </ul> <p>In the subsequent operation <code>difference1 * 2</code>, the check is green.</p>

- You cannot run the Automatic Orange Tester if you check for subnormals in your verification.

## Command-Line Information

**Parameter:** -check-subnormal

**Value:** allow | warn-first | warn-all | forbid

**Default:** allow

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -check-subnormal forbid

## See Also

### Polyspace Results

Subnormal float

**Introduced in R2016b**

## Detect uncalled functions (-uncalled-function-checks)

Detect functions that are not called directly or indirectly from `main` or another entry point function

### Description

*This option affects a Code Prover analysis only.*

Detect functions that are not called directly or indirectly from `main` or another entry point function during run-time.

### Set Option

**User interface:** In your project configuration, the option is on the **Check Behavior** node.

**Command line:** Use the option `-uncalled-function-checks`. See “Command-Line Information” on page 1-279.

### Why Use This Option

Typically, after verification, the **Dashboard** pane shows functions that are not called during verification. However, you do not see them in your analysis results or reports. You cannot comment on them or justify them.

If you want to see these uncalled functions in your analysis results and reports, use this option.

### Settings

**Default:** none

none

The verification does not generate checks for uncalled functions.

never-called

The verification generates checks for functions that are defined but not called.

called-from-unreachable

The verification generates checks for functions that are defined and called from an unreachable part of the code.

all

The verification generates checks for functions that are:

- Defined but not called
- Defined and called from an unreachable part of the code.

## Command-Line Information

**Parameter:** -uncalled-function-checks

**Value:** none | never-called | called-from-unreachable | all

**Default:** none

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -uncalled-function-checks all

## See Also

Function not called | Function not reachable

## Topics

“Specify Polyspace Analysis Options” (Polyspace Code Prover)

“Review and Fix Function Not Called Checks” (Polyspace Code Prover)

“Review and Fix Function Not Reachable Checks” (Polyspace Code Prover)

## Sensitivity context (-context-sensitivity)

Store call context information to identify function call that caused errors

### Description

*This option affects a Code Prover analysis only.*

Specify the functions for which the verification must store call context information. If the function is called multiple times, using this option helps you to distinguish between the different calls.

### Set Option

**User interface:** In your project configuration, the option is available on the **Precision** node.

**Command line:** Use the option `-context-sensitivity`. See “Command-Line Information” (Polyspace Code Prover).

### Why Use This Option

Suppose a function is called twice in your code. The check color on each operation in the function body is a combined result of both calls. If you want to distinguish between the colors in the two calls, use this option.

For instance, if a function contains a red or orange check and a green check on the same operation for two different calls, the software combines the contexts and displays an orange check on the operation. If you use this option, you can identify the color of the check for each call. For a tutorial on using this option, see “Identify Function Call with Run-Time Error” (Polyspace Code Prover).

### Settings

**Default:** none

none

The software does not store call context information for functions.

auto

The software stores call context information for checks in:

- Functions that form the leaves of the call tree. These functions are called by other functions, but do not call functions themselves.
- Small functions. The software uses an internal threshold to determine whether a function is small.

custom

The software stores call context information for functions that you specify. To enter the name of a function, click .

## Command-Line Information

**Parameter:** -context-sensitivity

**Value:** *function1*[,*function2*,...]

**Default:** none

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -context-sensitivity myFunc1,myFunc2

To allow the software to determine which functions receive call context storage, use the option -context-sensitivity-auto.

## See Also

### Topics

“Specify Polyspace Analysis Options” (Polyspace Code Prover)

## Improve precision of interprocedural analysis (-path-sensitivity-delta)

Avoid certain verification approximations for code with fewer lines

### Description

*This option affects a Code Prover analysis only.*

For smaller code, use this option to improve the precision of cross-functional analysis.

### Set Option

**User interface:** In your project configuration, the option is available on the **Precision** node.

**Command line:** Use the option `-path-sensitivity-delta`. See “Command-Line Information” on page 1-283.

### Why Use This Option

Use this option to avoid certain software approximations on execution paths. Avoiding these approximations results in fewer orange checks but a much longer verification time.

For instance, for deep function call hierarchies or nested conditional statements, to complete verification in a reasonable amount of time, the software combines many execution paths and stores less information at each stage of verification. If you use this option, the software stores more information about the execution paths, resulting in a more precise verification.

### Settings

**Default:** Off

Enter a positive integer to turn on this option.

Entering a higher value leads to a greater number of proven results, but also increases verification time exponentially. For instance, a value of 10 can result in very long verification times.

## Tips

Use this option only when you have less than 1000 lines of code.

## Command-Line Information

**Parameter:** -path-sensitivity-delta

**Value:** Positive integer

## See Also

### Topics

“Improve Verification Precision” (Polyspace Code Prover)

## Precision level (-0)

Specify a precision level for the verification

### Description

*This option affects a Code Prover analysis only.*

Specify the precision level that the verification must use.

### Set Option

**User interface:** In your project configuration, the option is available on the **Precision** node.

**Command line:** Use the option `-0#`, for instance, `-00` or `-01`. See “Command-Line Information” on page 1-285.

### Why Use This Option

Higher precision leads to greater number of proven results but also requires more verification time. Each precision level corresponds to a different algorithm used for verification.

In most cases, you see the optimal balance between precision and verification time at level 2.

### Settings

**Default:** 2

0

This option corresponds to a static interval verification.

1

This option corresponds to a complex polyhedron model of domain values.

2

This option corresponds to more complex algorithms closely modelling domain values. The algorithms combine both complex polyhedrons and integer lattices.

3

This option is only suitable for code having less than 1000 lines. Using this option, the percentage of proven results can be very high.

## Tips

For best results in reasonable time, use the default level 2. If the verification takes a long time, reduce precision. However, the number of unproven checks can increase. Likewise, to reduce orange checks, you can improve your precision. But the verification can take significantly longer time.

## Command-Line Information

**Parameter:** -00 | -01 | -02 | -03

**Default:** -02

**Example:** `polyspace-code-prover-nodesktop -sources file_name -01`

## See Also

### Topics

[“Specify Polyspace Analysis Options” \(Polyspace Code Prover\)](#)

[“Improve Verification Precision” \(Polyspace Code Prover\)](#)

## Specific precision (-modules-precision)

Specify source files you want to verify at higher precision than the remaining verification

### Description

*This option affects a Code Prover analysis only.*

Specify source files that you want to verify at a precision level higher than that for the entire verification.

### Set Option

**User interface:** In your project configuration, the option is available on the **Precision** node. See “Dependency” on page 1-287 for other options you must also enable.

**Command line:** Use the option `-modules-precision`. See “Command-Line Information” on page 1-287.

### Why Use This Option

If a specific file is verified imprecisely leading to many orange checks in the file and elsewhere, you can improve the precision for that file.

Note that increasing precision also increases verification time.

### Settings

**Default:** All files are verified with the precision you specified using **Precision > Precision level**.

Click  to enter the name of a file without the extension `.c` and the corresponding precision level.

## Dependency

This option is available only if you set `Source code language (-lang)` to C or C-CPP.

## Command-Line Information

**Parameter:** `-modules-precision`

**Value:** `file:00 | file:01 | file:02 | file:03`

**Example:** `polyspace-code-prover-nodesktop -sources file_name -01 -modules-precision My_File:02`

## See Also

Precision level (-0)

## Topics

“Specify Polyspace Analysis Options” (Polyspace Code Prover)

“Improve Verification Precision” (Polyspace Code Prover)

## Verification level (-to)

Specify number of times the verification process runs on your code

### Description

*This option affects a Code Prover analysis only.*

Specify the number of times the Polyspace verification process runs on your source code. Each run can lead to greater number of proven results but also requires more verification time.

### Set Option

**User interface:** In your project configuration, the option is available on the **Precision** node.

**Command line:** Use the option -to. See “Command-Line Information” on page 1-291.

### Why Use This Option

There are many reasons you might want to increase or decrease the verification level. For instance:

- Coding rules are checked early during the compilation phase, with some exceptions (Polyspace Code Prover) only. If you check for coding rules alone, you can lower the verification level.
- If you see many orange checks after verification, try increasing the verification level. However, increasing the verification level also increases verification time.

In most cases, you see the optimal balance between precision and verification time at level 2.

### Settings

**Default:** Software Safety Analysis level 2

### Source Compliance Checking

Polyspace completes coding rules checking at the end of the compilation phase.

### Software Safety Analysis level 0

The verification process runs once on your source code.

### Software Safety Analysis level 1

The verification process runs twice on your source code.

### Software Safety Analysis level 2

The verification process runs three time on your source code. Use this option for most accurate results in reasonable time.

### Software Safety Analysis level 3

The verification process runs four times on your source code.

### Software Safety Analysis level 4

The verification process runs five times on your source code.

### other

If you use this option, Polyspace verification will make 20 passes unless you stop it manually.

## Tips

- Use a higher verification level for fewer orange checks.

### **Difference between Level 0 and 1**

The following example illustrates the difference between Software Safety Analysis level 0 and Software Safety Analysis level 1:

Software Safety Analysis Level 0	Software Safety Analysis Level 1
<pre>#include &lt;stdlib.h&gt;  void ratio    (float x, float *y) {     *y=(abs(x-*y))/(x+*y); }  void level1 (float x,               float y, float *t) { float v;   v = y;   ratio (x, &amp;y);   *t = 1.0/(v - 2.0 * x); }  float level2(float v) {     float t;     t = v;     level1(0.0, 1.0, &amp;t);     return t; }  void main(void) {     float r,d;     d= level2(1.0);     r = 1.0 / (2.0 - d); }</pre>	<pre>#include &lt;stdlib.h&gt;  void ratio    (float x, float *y) {     *y=(abs(x-*y))/(x+*y); }  void level1 (float x,               float y, float *t) { float v;   v = y;   ratio (x, &amp;y);   *t = 1.0/(v - 2.0 * x); }  float level2(float v) {     float t;     t = v;     level1(0.0, 1.0, &amp;t);     return t; }  void main(void) {     float r,d;     d= level2(1.0);     r = 1.0 / (2.0 - d); }</pre>

In the table, verification produces an orange **Division by Zero** check during level 0 verification. The check turns green during level 1. The verification acquires more precise knowledge of  $x$  in the higher level.

If a higher verification level fails because the verification runs out of memory, but results are available at a lower level, Polyspace displays the results from the lower level.

- For best results, use the option **Software Safety Analysis level 2**. If the verification takes too long, use a lower **Verification level**. Fix red errors and gray code before rerunning the verification with higher verification levels.

- Use the option `Other` sparingly since it can increase verification time by an unreasonable amount. Using `Software Safety Analysis level 2` provides optimal verification of your code in most cases.
- If you want to check for coding rules only, you can run Polyspace on your source code up to the `Source Compliance Checking` phase.

With the exception of certain rules (Polyspace Code Prover) Polyspace checks for coding rule violations during the compilation phase.

- If the **Verification Level** is set to `Source Compliance Checking`, do not run verification on a remote server. The source compliance checking, or compilation, phase takes place on your local computer anyway. Therefore, if you are running verification only to the end of compilation, run verification on your local computer.

## Command-Line Information

**Parameter:** `-to`

**Value:** `compile | pass0 | pass1 | pass2 | pass3 | pass4 | other`

**Default:** `pass2`

**Example:** `polyspace-code-prover-nodesktop -sources file_name -to pass2`

## See Also

### Topics

“Improve Verification Precision” (Polyspace Code Prover)

## Verification time limit (-timeout)

Specify a time limit on your verification

### Description

*This option affects a Code Prover analysis only.*

Specify a time limit for the verification in hours. If the verification does not complete within that limit, it stops.

### Set Option

**User interface:** In your project configuration, the option is available on the **Precision** node.

**Command line:** Use the option `-timeout`. See “Command-Line Information” on page 1-293.

### Why Use This Option

Use this option to impose a time limit on the verification.

By default, if an internal step in the verification lasts for more than 24 hours, the verification stops. You can use this option to reduce the time limit even further. Note that you can have verification results despite the verification timing out. For instance, if a step in Software Safety Analysis level 1 times out, you still get the results from level 0. See `Verification level (-to)`.

The option is useful only in very specific cases. Suppose your code has certain constructs that might slow down the verification. To check this, you can impose a time limit on the verification so that the verification stops if it takes too long.

Typically, Technical Support asks you to use this option as needed.

## Settings

Enter the time in hours. For fractions of an hour, specify decimal form.

## Command-Line Information

**Parameter:** -timeout

**Value:** *time*

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -timeout  
5.75

## See Also

### Topics

“Specify Polyspace Analysis Options” (Polyspace Code Prover)

“Improve Verification Precision” (Polyspace Code Prover)

## Inline (-inline)

Specify functions that must be cloned internally for each function call

### Description

*This option affects a Code Prover analysis only.*

Specify the functions that the verification must clone internally for every function call.

### Set Option

**User interface:** In your project configuration, the option is available on the **Scaling** node.

**Command line:** Use the option `-inline`. See “Command-Line Information” on page 1-296.

### Why Use This Option

Use this option sparingly. Sometimes, using the option helps to work around scaling issues during verification. If your verification takes too long, Technical Support can ask you to use this option for certain functions.

Do not use this option to understand results. For instance, suppose a function is called twice in your code. The check color on each operation in the function body is a combined result of both calls. If you want to distinguish between the colors in the two calls, use the option `Sensitivity context (-context-sensitivity)`.

### Settings

#### No Default

Enter function names or choose from a list.

- Click  to add a field and enter the function name.

- Click  to list functions in your code. Choose functions from the list.

The verification internally clones the function for each call. For instance, if you specify the function `func` for inlining and `func` is called twice, the software creates two copies of `func` for verification. The copies are named using the convention `func_pst_inlined_ver` where `ver` is the version number. You see both copies on the **Call Hierarchy** pane.

However, for each run-time check in the function body, you see only one color in your verification results. The semantics of the check color is different from the normal specification.

*Red checks:*

- Normally, if a function is called twice and an operation causes a definite error only in one of the calls, the check color is orange.
- If you use this option, the worst color is shown for the check. Therefore, the check is red.

*Gray checks:*

- Normally, if a function is called twice and an `if` statement branch is unreachable in only one of the calls, the branch is shown as reachable.
- If you use this option, the worst color is shown for the check. Therefore, the `if` branch appears gray.

Do not use this option to understand results. Use this option only if a certain function causes scaling issues.

## Tips

- Use this option to identify the cause of a **Non-terminating call** error.
  - **Situation:** Sometimes, a red **Non-terminating call** check can appear on a function call though a red check does not appear in the function body. The function body represents all calls to the function. Therefore, if some calls to a function do not cause an error, an orange check appears in the function body.
  - **Action:** If you use this option, for every function call, there is a corresponding function body. Therefore, you can trace a red check on a function call to a red check in the function body.

- Using this option can sometimes duplicate a lot of code and lead to scaling problems. Therefore choose functions to inline carefully.
- Choose functions to inline based on hints provided by the alias verification.
- Do not use this option for entry point functions, including `main`.
- Using this option can increase the number of gray **Unreachable code** checks.

For example, in the following code, if you enter `max` for **Inline**, you obtain two **Unreachable code** checks, one for each call to `max`.

```
int max(int a, int b) {
    return a > b ? a : b;
}
```

```
void main() {
    int i=3, j=1, k;
    k=max(i,j);
    i=0;
    k=max(i,j);
}
```

- If you use the keyword `inline` before a function definition, place the definition in a header file and call the function from multiple source files, you have the same result as using the option **Inline**.
- For C++ code, this option applies to all overloaded methods of a class.

## Command-Line Information

**Parameter:** `-inline`

**Value:** `function1[,function2[,...]]`

**No Default**

**Example:** `polyspace-code-prover-nodesktop -sources file_name -inline func1,func2`

## See Also

## Depth of verification inside structures (-k-limiting)

Limit the depth of analysis for nested structures

### Description

*This option affects a Code Prover analysis only.*

Specify a limit to the depth of analysis for nested structures.

### Set Option

**User interface:** In your project configuration, the option is available on the **Scaling** node.

**Command line:** Use the option `-k-limiting`. See “Command-Line Information” on page 1-298.

### Why Use This Option

Use this option if the analysis is slow because your code has a structure that is many levels deep.

Typically, you see a warning message when a structure with a deep hierarchy is slowing down the verification.

### Settings

**Default:** Full depth of nested structures is analyzed.

Enter a number to specify the depth of analysis for nested structures. For instance, if you specify 0, the analysis does not verify a structure inside a structure.

If you specify a number less than 2, the verification could be less precise.

## Command-Line Information

**Parameter:** -k-limiting

**Value:** *positive integer*

**Default:** polyspace-code-prover-nodesktop -sources *file\_name* -k-limiting 3

## See Also

# Generate report

Specify whether to generate a report after the analysis

## Description

Specify whether to generate a report after the analysis.

Depending on the format you specify, you can view this report using an external software. For example, if you specify the format **PDF**, you can view the report in a **pdf** reader.

## Set Option

**User interface:** In your project configuration, the option is available on the **Reporting** node.

**Command line:** See “Command-Line Information” on page 1-300.

## Why Use This Option

You can generate a report from your analysis results for archiving purposes. You can provide this report to your management or clients as proof of code quality.


Using other analysis options, you can tailor the report content and format for your specific needs. See **Bug Finder and Code Prover report (-report-template)** and **Output format (-report-output-format)**.

## Settings

On

Polyspace generates an analysis report using the template and format you specify.

The report is stored in the **Polyspace-Doc** subfolder of your results folder. To open your results folder from the user interface, on the **Project Browser** pane, right-click the results node and select **Open Folder with File Manager**.

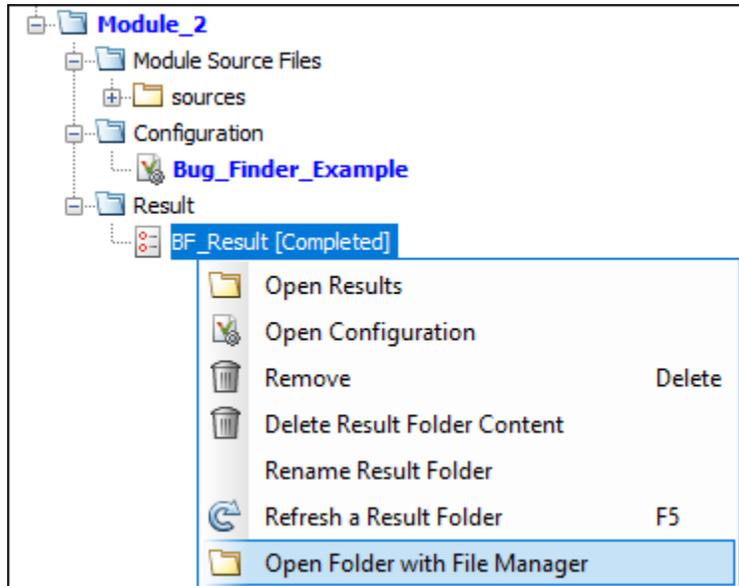

To change the results folder location, see “Project and Results Folder Contents”.

Off (default)

Polyspace does not generate an analysis report. You can still view your results in the Polyspace interface.

## Tips

- To generate a report *after* an analysis is complete, select **Reporting > Run Report**. Alternatively, at the command line, use the command `polyspace -report-generator`.

## Command-Line Information

There is no command-line option to solely turn on the report generator. However, using the options `-report-template` for template and `-report-output-format` for output format automatically turns on the report generator.

## See Also

Bug Finder and Code Prover report (-report-template) | Output format (-report-output-format)

## Topics

“Specify Polyspace Analysis Options”  
“Generate Reports”

## Bug Finder and Code Prover report (-report-template)

Specify template for generating analysis report

### Description

Specify template for generating analysis report.

.rpt files for the report templates are available in *matlabroot*\toolbox\polyspace\psrptgen\templates\. Here, *matlabroot* is the MATLAB installation folder.

### Set Option

**User interface:** In your project configuration, the option is on the **Reporting** node. You have separate options for Bug Finder and Code Prover analysis. See “Dependencies” on page 1-309 for other options you must also enable.

**Command line:** Use the option -report-template. See “Command-Line Information” on page 1-309.

### Why Use This Option

Depending on the template that you use, the report contains information about certain types of results from the **Results List** pane. The template also determines what information is presented in the report and how the information is organized. See the template descriptions below.

## Settings - Bug Finder

**Default:** BugFinderSummary

BugFinder

The report lists:

- **Polyspace Bug Finder Summary:** Number of results in the project. The results are summarized by file. The files that are partially analyzed because of compilation errors are listed in a separate table.
- **Code Metrics:** Summary of the various code complexity metrics. For more information, see “Code Metrics”.
- **Coding Rules:** Coding rule violations in the source code. For each rule violation, the report lists the:
  - Rule number and description.
  - Function containing the rule violation.
  - Review information, such as **Severity**, **Status** and comments.
- **Defects:** Defects found in the source code. For each defect, the report lists the:
  - Function containing the defect.
  - Defect information on the **Result Details** pane.
  - Review information, such as **Severity**, **Status** and comments.
- **Configuration Settings:** List of analysis options that Polyspace uses for analysis. If you configured your project for multitasking, this section also lists the **Concurrency Modeling Summary**. For more information, see “Analysis Options”. If your project has source files with compilation errors, these files are also listed.

If you check for coding rules, an additional **Coding Rules Configuration** section states the rules along with the information whether they were enabled or disabled.

### BugFinderSummary

The report lists:

- **Polyspace Bug Finder Summary:** Number of results in the project. The results are summarized by file. The files that are partially analyzed because of compilation errors are listed in a separate table.
- **Code Metrics:** Summary of the various code complexity metrics. For more information, see “Code Metrics”.
- **Coding Rules Summary:** Coding rules along with number of violations.
- **Defect Summary:** Defects that Polyspace Bug Finder looks for. For each defect, the report lists the:
  - Defect group.

- Defect name.
- Number of instances of the defect found in the source code.
- **Configuration Settings:** List of analysis options that Polyspace uses for analysis. If you configured your project for multitasking, this section also lists the **Concurrency Modeling Summary**. For more information, see “Analysis Options”. If your project has source files with compilation errors, these files are also listed.

If you check for coding rules, an additional **Coding Rules Configuration** section states the rules along with the information whether they were enabled or disabled.

### CodeMetrics

The report lists the following:

- **Code Metrics Summary:** Various quantities related to the source code. For more information, see “Code Metrics”.
- **Code Metrics Details:** Various quantities related to the source code with the information broken down by file and function.
- **Configuration Settings:** List of analysis options that Polyspace uses for analysis. If you configured your project for multitasking, this section also lists the **Concurrency Modeling Summary**. For more information, see “Analysis Options”. If your project has source files with compilation errors, these files are also listed.

If you check for coding rules, an additional **Coding Rules Configuration** section states the rules along with the information whether they were enabled or disabled.

### CodingRules

For C code, the report lists information about compliance with:

- MISRA C rules
- MISRA AC AGC rules
- Custom coding rules

For C++ code, the report lists information about compliance with:

- MISRA C++ rules
- JSF C++ rules
- Custom coding rules

This report also contains the Polyspace configuration settings for the analysis. An additional section states the rules along with the information whether they were enabled or disabled.

### SecurityCERT

The report contains the same information as the BugFinder report. However, in the **Defects** chapter, an additional column lists the CERT C rules mapped to each defect. The **Configuration Settings** appendix also includes a **Security Standard to Polyspace Result Map**.

### SecurityCWE

The report contains the same information as the BugFinder report. However, in the **Defects** chapter, an additional column lists the CWE rules mapped to each defect. The **Configuration Settings** appendix also includes a **Security Standard to Polyspace Result Map**.

### SecurityISO\_17961

The report contains the same information as the BugFinder report. However, in the **Defects** chapter, an additional column lists the ISO/IEC TS 17961 rules mapped to each defect. The **Configuration Settings** appendix also includes a **Security Standard to Polyspace Result Map**.

### Metrics

*Only available for results downloaded from the Polyspace Metrics interface.*

The report lists information useful to quality engineers and available on the Polyspace Metrics interface, including:

- Information about whether the project satisfies quality objectives
- Time taken in each phase of analysis
- Metrics about the whole project. For each metric, the report lists the quality threshold and whether the metric satisfies this threshold.
- Coding rule violations in the project. For each rule, the report lists the number of violations justified and whether the justifications satisfy quality objectives.
- Definite as well as possible run-time errors in the project. For each type of run-time error, the report lists the number of errors justified and whether the justifications satisfy quality objectives.

The appendices contain further details of Polyspace configuration settings, code metrics, coding rule violations, and run-time errors.

## Settings - Code Prover

### Default: Developer

#### CodeMetrics

The report contains a summary of code metrics, followed by the complete metrics for an application.

#### CodingRules

For C code, the report lists information about compliance with:

- MISRA C rules
- MISRA AC AGC rules
- Custom coding rules

For C++ code, the report lists information about compliance with:

- MISRA C++ rules
- JSF C++ rules
- Custom coding rules

This report also contains the Polyspace configuration settings and modifiable assumptions used in the analysis. An additional section states the rules along with the information whether they were enabled or disabled.

#### Developer

The report lists information useful to developers, including:

- Summary of results
- Coding rule violations
- List of proven run-time errors or red checks
- List of unproven run-time errors or orange checks
- List of unreachable procedures or gray checks
- Global variable usage in code. See “Global Variables” (Polyspace Code Prover).

The report also contains the Polyspace configuration settings and modifiable assumptions used in the analysis. If your project has source files with compilation errors, these files are also listed.

## DeveloperReview

The report lists the same information as the Developer report. However, the reviewed results are sorted by severity and status, and unreviewed results are sorted by file location.

## Developer\_withGreenChecks

The report lists the same information as the Developer report. In addition, the report lists code proven to be error-free or green checks.

## Quality

The report lists information useful to quality engineers, including:

- Summary of results
- Statistics about the code
- Graphs showing distributions of checks per file

The report also contains the Polyspace configuration settings and modifiable assumptions used in the analysis. If your project has source files with compilation errors, these files are also listed.

## VariableAccess

The report displays the global variable access in your source code. The report first displays the number of global variables of each type. For information on the types, see “Global Variables” (Polyspace Code Prover). For each global variable, the report displays the following information:

- Variable name.

The entry for each variable is denoted by |.

- Type of the variable.
- Number of read and write operations on the variable.
- Details of read and write operations. For each read or write operation, the table displays the following information:

- File and function containing the operation in the form *file\_name.function\_name*.

The entry for each read or write operation is denoted by ||. Write operations are denoted by < and read operations by >.

- Line and column number of the operation.

This report captures the information available on the **Variable Access** pane in the Polyspace user interface.

### CallHierarchy

The report displays the call hierarchy in your source code. For each function call in your source code, the report displays the following information:

- Level of call hierarchy, where the function is called.

Each level is denoted by |. If a function call appears in the table as `||| -> file_name.function_name`, the function call occurs at the third level of the hierarchy. Beginning from `main` or an entry point, there are three function calls leading to the current call.

- File containing the function call.

In addition, the line and column is also displayed.

- File containing the function definition.

In addition, the line and column where the function definition begins is also displayed.

In addition, the report also displays uncalled functions.

This report captures the information available on the **Call Hierarchy** pane in the Polyspace user interface.

### SoftwareQualityObjectives

The report lists information useful to quality engineers and available on the Polyspace Metrics interface, including:

- Information about whether the project satisfies quality objectives
- Time taken in each phase of verification
- Metrics about the whole project. For each metric, the report lists the quality threshold and whether the metric satisfies this threshold.
- Coding rule violations in the project. For each rule, the report lists the number of violations justified and whether the justifications satisfy quality objectives.
- Definite as well as possible run-time errors in the project. For each type of run-time error, the report lists the number of errors justified and whether the justifications satisfy quality objectives.

The appendices contain further details of Polyspace configuration settings, code metrics, coding rule violations, and run-time errors.

This template is available only if you generate a report from results downloaded from the Polyspace Metrics web dashboard.

#### SoftwareQualityObjectives\_Summary

The report contains the same information as the `SoftwareQualityObjectives` report. However, it does not have the supporting appendices with details of code metrics, coding rule violations and run-time errors.

This template is available only if you generate a report from results downloaded from the Polyspace Metrics web dashboard.

## Dependencies

This option is available only if you select the `Generate report` check box.

## Tips

The first chapter of the reports contain a summary of the relevant results. You can enter a Pass/Fail status in that chapter for your project based on the summary. If you use the template `SoftwareQualityObjectives` or `SoftwareQualityObjectives_Summary`, the status is automatically assigned based on your objectives and the verification results. For more information on enforcing objectives using Polyspace Metrics, see “Compare Metrics Against Software Quality Objectives”.

## Command-Line Information

**Parameter:** `-report-template`

**Value:** Full path to `template.rpt`

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -report-template matlabroot\toolbox\polyspace\psrptgen\templates\bug_finder\BugFinder.rpt`

## See Also

`Generate report | Output format (-report-output-format)`

**Topics**

“Generate Reports”

# Output format (-report-output-format)

Specify output format of generated report

## Description

Specify output format of analysis report.

## Set Option

**User interface:** In your project configuration, the option is on the **Reporting** node. See “Dependencies” on page 1-312 for other options you must also enable.

**Command line:** Use the option -report-output-format. See “Command-Line Information” on page 1-312.

## Why Use This Option

Use this option to specify whether you want a report in PDF, HTML or another format.

## Settings

**Default:** Word

HTML

Generate report in .html format

PDF

Generate report in .pdf format

Word

Generate report in .docx format.

### Tips

If the table of contents or graphics in a `.docx` report appear outdated, select the content of the report and refresh the document. Use keyboard shortcuts **Ctrl+A** to select the content and **F9** to refresh it.

### Dependencies

This option is enabled only if you select the **Generate report** box.

### Command-Line Information

**Parameter:** `-report-output-format`

**Value:** `html | pdf | word`

**Default:** `word`

**Example:** `polyspace-bug-finder-nodesktop -sources file_name -report-output-format pdf`

### See Also

Generate report | Bug Finder and Code Prover report (`-report-template`)

### Topics

“Specify Polyspace Analysis Options”

“Generate Reports”

# Run Bug Finder or Code Prover analysis on a remote cluster (-batch)

Enable batch remote analysis

## Description

Enable batch remote analysis.

For batch remote analysis, you need:

- Polyspace and MATLAB Distributed Computing Server™ on the cluster
- MATLAB, Polyspace and Parallel Computing Toolbox™ on your local computer.

## Set Option

**User interface:** In your project configuration, the option is on the **Run Settings** node. You have separate options for a Bug Finder and a Code Prover analysis.

**Command line:** Use the option `-batch`. See “Command-Line Information” on page 1-315.

## Why Use This Option

Use this option if you want the analysis to run on a remote cluster instead of your local desktop.

For instance, you can run remote analysis when:

- You want to shut down your local machine but not interrupt the analysis.
- You want to free execution time on your local machine.
- You want to transfer the analysis to a more powerful computer.

## Settings

On

Run batch analysis on a remote computer. In this remote analysis mode, the analysis is queued on a cluster after the compilation phase. Therefore, on your local computer, after the analysis is queued:

- If you are running the analysis from the Polyspace user interface, you can close the user interface.
- If you are running the analysis from the command line, you can close the command-line window.

You can manage the queue from the Polyspace Job Monitor. To use the Polyspace Job Monitor:

- In the Polyspace user interface, select **Tools > Open Job Monitor**.
- On the DOS or UNIX® command line, use the `polyspace-jobs-manager` command. For more information, see “Run Polyspace Analysis on Remote Clusters Using Scripts”.
- On the MATLAB command line, use the `polyspaceJobsManager` function.

After the analysis, you might have to manually download the results from the cluster.

Off (default)

Do not run batch analysis on a remote computer.

## Dependencies

- If you use a third-party scheduler instead of the MATLAB Job Scheduler, add the option `-no-credentials-check`. The credentials check performed in the product is only compatible with the MATLAB Job Scheduler. In the Polyspace user interface, add this option to the **Other** field.
- Do not run a Code Prover analysis on a remote cluster if you run up to the **Verification Level** of **Source Compliance Checking**. For both local and remote analysis, the source compliance checking or compilation phase takes place on your local computer. Therefore, if you are running only up to this phase, run on your local computer.

## Command-Line Information

To run a remote analysis from the command line, use with the `-scheduler` option.

**Parameter:** `-batch`

**Value:** `-scheduler host_name` if you have not set the **Job scheduler host name** in the Polyspace user interface

**Default:** Off

**Example:** `polyspace-code-prover-nodesktop -batch -scheduler NodeHost`

`polyspace-code-prover-nodesktop -batch -scheduler MJSName@NodeHost`

**Example:** `polyspace-bug-finder-nodesktop -batch -scheduler NodeHost`

`polyspace-bug-finder-nodesktop -batch -scheduler MJSName@NodeHost`

## See Also

Upload results to Polyspace Metrics (`-add-to-results-repository`) | `-scheduler`

## Topics

“Specify Polyspace Analysis Options”

“Set Up Polyspace Analysis on Remote Server”

“Run Polyspace Analysis on Remote Clusters”

## Upload results to Polyspace Metrics (-add-to-results-repository)

Upload analysis results for viewing on Polyspace Metrics web dashboard

### Description

Specify upload of analysis results to the Polyspace Metrics results repository, allowing Web-based reporting of results and code metrics.

### Set Option

**User interface:** In your project configuration, the option is on the **Run Settings** node. You have separate options for a Bug Finder and a Code Prover analysis. See “Dependencies” on page 1-317 for other options that you must also enable.

**Command line:** Use the option `-add-to-results-repository`. See “Command-Line Information” on page 1-317.

### Why Use This Option

Polyspace Metrics is a web dashboard that generates code quality metrics from your analysis results. Using this dashboard, you can:

- Provide your management a high-level overview of your code quality.
- Compare your code quality against predefined standards.
- Establish a process where you review in detail only those results that fail to meet standards.
- Track improvements or regression in code quality over time.

See “Generate Code Quality Metrics”.

## Settings

On

Analysis results are stored in the Polyspace Metrics results repository. This allows you to use a Web browser to view results and code metrics.

The results are not downloaded automatically to your desktop.

Off (default)

Analysis results are stored locally.

## Dependencies

The option to upload to Polyspace Metrics is available only if you select Run Bug Finder or Code Prover analysis on a remote cluster (-batch).

If you perform a local analysis on your desktop, you can later upload your results to Polyspace Metrics. Right-click your results file and select **Upload to Metrics**.

## Command-Line Information

**Parameter:** -add-to-results-repository

**Default:** Off

**Example:** polyspace-code-prover-nodesktop -batch -scheduler NodeHost -add-to-results-repository -password *passwordName*

**Example:** polyspace-bug-finder-nodesktop -batch -scheduler NodeHost -add-to-results-repository -password *passwordName*

The password is optional.

The upload uses the Polyspace Metrics server that you set up in the Polyspace user interface. See Configure Client Side (Polyspace Metrics). If you want to explicitly specify the Polyspace Metrics server during upload, use the option -polyspace-metrics-server *serverName:portNumber*. For instance:

```
-add-to-results-repository -polyspace-metrics-server localhost:12427
```

## **See Also**

Run Bug Finder or Code Prover analysis on a remote cluster (-batch)

## **Topics**

“Set Up Polyspace Metrics”

“Upload Results to Polyspace Metrics”

“View Projects in Polyspace Metrics”

# Use fast analysis mode for Bug Finder (-fast-analysis)

Run analysis using faster local mode

## Description

*This option affects a Bug Finder analysis only.*

Run analysis using faster local mode. The first run analyzes all files, but subsequent runs analyze only the files that you edited since the previous analysis.

Fast analysis mode is a faster way to analyze code for localized defects and coding rules. When you launch fast analysis, Bug Finder analyzes your code for a subset of defects and coding rules.

## Set Option

**User interface:** In your project configuration, the option is available on the **Run Settings** node.

**Command line:** Use the option `-fast-analysis`. See “Command-Line Information” on page 1-322.

## Why Use This Option


If you use this option, you have to wait less for analysis results from your second analysis onwards. During development, you can frequently run analysis in fast mode and quickly check for new defects or coding rule violations.

Polyspace produces results quickly because the analysis is localized. When you rerun in fast-analysis mode, Polyspace reanalyzes only those files that need to be reanalyzed, regenerating results even more quickly. These situations trigger a reanalysis.

Situation	What Is Reanalyzed
You modified a source file.	Modified source file
You modified a header file.	Source files that include the modified header file (directly or indirectly)
You added or removed an analysis option.	All files
Previous fast-analysis results were not found.  For instance, you deleted the results folder.	All files
You upgraded to a later release of Polyspace and ran the analysis.	All files  Comments from the previous analysis are retained and imported to the current analysis.

For example, consider a Polyspace project with three .c files and you fix a bug in one of the files. When you rerun the analysis, Polyspace reanalyzes only the one file that you changed.

The results of fast analysis appear in a folder separate from the results of normal analysis.

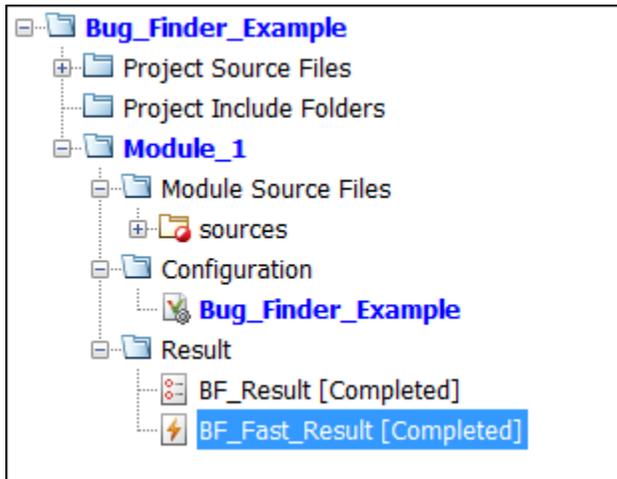

## Settings

Default:  Off

On

Polyspace Bug Finder runs in fast-analysis mode. Polyspace analyzes code for only a subset of defects and coding rules. If you have selected any defects or coding rules that are not supported by fast-analysis, your code is not checked for those results.

Off

Polyspace Bug Finder runs in the normal mode. Analysis checks for all selected defects, coding rules, and code metrics.

## Tips

### Comments Import

If you enter comments in your results, the comments are automatically imported to the next analysis in fast mode.

To import the comments from fast mode results to results of a regular Bug Finder analysis, do one of the following:

- Select **Tools > Import Comments**. Navigate to the sibling results folder `BF_Fast_Result` and import comments from the fast mode results.
- When reviewing results of fast mode, enter the comments directly into your code. If you run a regular analysis on this code, the comments are imported to your analysis results.

For details on how to enter code comments, see “Annotate Code and Hide Known or Acceptable Results”.

### Fast Analysis Limitations

In fast analysis mode, you cannot perform these actions:

- You cannot create a new results folder for each run. Even if you choose to create a new result folder, each new run overwrites the previous one.

- You cannot specify constraints using the option `Constraint setup (-data-range-specifications)`.
- You cannot run the analysis on a remote cluster.

### Command-Line Information

**Parameter:** `-fast-analysis`

**Default:** Off

**Example:** `polyspace-bug-finder-nodesktop -sources filename -fast-analysis`

### See Also

“Defects”

### Topics

“Results Found by Fast Analysis”

# Command/script to apply after the end of the code verification (-post-analysis-command)

Specify command or script to be executed after analysis

## Description

Specify a command or script to be executed after the analysis.

## Set Option

**User interface:** In your project configuration, the option is on the **Advanced Settings** node.

**Command line:** Use the option `-post-analysis-command`. See “Command-Line Information” on page 1-325.

## Why Use This Option

Create scripts for tasks that you want performed after the Polyspace analysis.

For instance, you want to be notified by email that the Polyspace analysis is over. Create a script that sends an email and use this option to execute the script after the Polyspace analysis.

## Settings

### No Default

Enter full path to the command or script, or click  to navigate to the location of the command or script. After the analysis, this script is executed.

For a Perl script, in Windows, specify the full path to the Perl executable followed by the full path to the script. For example, to specify a Perl script `send_email.pl` that sends an email once the analysis is over, enter `matlabroot\sys\perl\win32\bin\perl.exe <absolute_path>\send_email.pl`. Here, *matlabroot* is the location of the current MATLAB installation, such as `C:\Program Files\MATLAB\R2015b\`, and *<absolute\_path>* is the location of the Perl script.

## Tips

### Running post analysis commands on the server

If you perform verification on a remote server, after verification, the software executes your command on the server, not on the client desktop. If your command executes a script, the script must be present on the server.

For instance, if you specify the command, `/local/utills/send_mail.sh`, the Shell script `send_email.sh` must be present on the server in `/local/utills/`. The software does not copy the script `send_email.sh` from your desktop to the server before executing the command. If the script is not present on the server, you encounter an error. Sometimes, there are multiple servers that the MATLAB Job Scheduler can run the verification on. Place the script on each of the servers because you do not control which server eventually runs your verification.

### Running post analysis commands in the Polyspace user interface

To test the use of this option, run the following Perl script from a folder containing a Polyspace project (`.psprj` file). The script parses the latest Polyspace log file in the folder `Module_1\CP_Result` and writes the current project name and date to a file `report.txt`. The file is saved in `Module_1\CP_Result`.

```

foreach my $file (`ls Module_1\CP_Result\Polyspace_*.log`) {
    open (FH, $file);

    while ($line = <FH>) {
        if ($line =~ m/Ending at: (.*)/) {
            $date=$1;
        }
        if ($line =~ m/-prog=(.*)/) {
            $project=$1;
        }
    }
}

my $filename = 'report.txt';
open(my $fh, '>', $filename) or die "Could not open file '$filename' $!";

print $fh "date=$date\n";
print $fh "project=$project\n";

close $fh;

```

In Linux, you can specify the Perl script for this option.

In Windows, instead of specifying the Perl script directly, specify a .bat file that invokes Perl and runs this script. For instance, the .bat file can contain the following line (assuming that the .bat file and .pl file are in the Polyspace project folder). Depending on your MATLAB installation, change the path to perl.exe appropriately.

```
"C:\Program Files\MATLAB\R2018b\sys\perl\win32\bin\perl.exe" command.pl
```

Run Code Prover. Check that the folder Module\_1\CP\_Result contains the file report.txt with the project name and date.

## Command-Line Information

**Parameter:** -post-analysis-command

**Value:** Path to executable file or command in quotes

**No Default**

**Example in Linux:** polyspace-bug-finder-nodesktop -sources *file\_name* -post-analysis-command `pwd`/send\_email.pl

**Example in Windows:** `polyspace-bug-finder-nodesktop -sources file_name -post-analysis-command "C:\Program Files\MATLAB\R2015b\sys\perl\win32\bin\perl.exe" "C:\My_Scripts\send_email"`

## See Also

Command/script to apply to preprocessed files (-post-preprocessing-command)

## Topics

"Specify Polyspace Analysis Options"

## Automatic Orange Tester (-automatic-orange-tester)

Specify that Automatic Orange Tester must be executed after verification

### Description

*This option affects a Code Prover analysis only.*

Specify that the Automatic Orange Tester must be executed at the end of the verification.

### Set Option

**User interface:** In your project configuration, the option is on the **Advanced Settings** node. See “Dependency” on page 1-328 for other options you must also enable.

**Command line:** Use the option `-automatic-orange-tester`. See “Command-Line Information” on page 1-328.

### Why Use This Option

The Automatic Orange Tester runs dynamic tests on your code. The dynamic tests help you determine if an orange check represents a real run-time error or an imprecision of Polyspace analysis. For a tutorial, see “Test Orange Checks for Run-Time Errors” (Polyspace Code Prover).

To run the Automatic Orange Tester after verification, you must select this option *before verification*. During verification, Polyspace generates additional source code to test each orange check for errors. When you run the Automatic Orange Tester later, the software uses this instrumented code for testing.

## Settings

On

After verification, when you run the Automatic Orange Tester, Polyspace creates tests for unproven code and runs them.

Off (default)

You cannot launch the Automatic Orange Tester after verification.

## Dependency

This option is available only if you set `Source code language (-lang)` to C or C-CPP.

## Tips

- To launch the Automatic Orange Tester, after verification, open your results. Select **Tools > Automatic Orange Tester**.
- When using the automatic orange tester, you cannot:
  - Select **Division round down** under **Target & Compiler**.
  - Select the options `c18`, `tms320c3c`, `x86_64` or `sharc21x61` for **Target & Compiler > Target processor type**.
  - Specify the type `char` as 16-bit or `short` as 8-bit using the option `mcpu...` (Advanced) for **Target & Compiler > Target processor type**. For the same option, you must specify the type `pointer` as 32-bit.
  - Specify global asserts in the code, having the form `Pst_Global_Assert(A,B)`. In global assert mode, you cannot use **Constraint setup** under **Inputs & Stubbing**.
  - Select these options related to floating-point verification: **Subnormal detection mode** and **Consider non finite floats**.

## Command-Line Information

**Parameter:** `-automatic-orange-tester`

**Default:** Off

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -lang c -automatic-orange-tester

## See Also

Number of automatic tests (-automatic-orange-tester-tests-number) |  
Maximum loop iterations (-automatic-orange-tester-loop-max-iteration) | Maximum test time (-automatic-orange-tester-timeout)

## Topics

“Test Orange Checks for Run-Time Errors” (Polyspace Code Prover)  
“Limitations of Automatic Orange Tester” (Polyspace Code Prover)

## Maximum loop iterations (-automatic-orange-tester-loop-max-iteration)

Specify number of loop iterations after which Automatic Orange Tester considers infinite loop

### Description

*This option affects a Code Prover analysis only.*

Specify number of loop iterations after which the Automatic Orange Tester considers the loop to be infinite. Specifying a large number decreases the possibility of identifying an infinite loop incorrectly, but takes more time to complete.

### Set Option

**User interface:** In your project configuration, the option is on the **Advanced Settings** node. See “Dependencies” on page 1-330 for other options you must also enable.

**Command line:** Use the option `-automatic-orange-tester-loop-max-iteration`. See “Command-Line Information” on page 1-331.

### Settings

**Default:** 1000

Enter number of loop iterations. The maximum value that the software supports is 1000.

### Dependencies

This option is enabled only if you set the following options:

- Set Source code language (`-lang`) to C.

- Turn on Automatic Orange Tester (-automatic-orange-tester).

## Command-Line Information

**Parameter:** -automatic-orange-tester-loop-max-iteration

**Value:** *positive integer*

**Default:** 1000

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -lang c -automatic-orange-tester -automatic-orange-tester-loop-max-iteration 500

## See Also

Automatic Orange Tester (-automatic-orange-tester) | Number of automatic tests (-automatic-orange-tester-tests-number) | Maximum test time (-automatic-orange-tester-timeout)

## Topics

“Test Orange Checks for Run-Time Errors” (Polyspace Code Prover)

## Number of automatic tests (-automatic-orange-tester-tests-number)

Specify number of tests that Automatic Orange Tester must run

### Description

*This option affects a Code Prover analysis only.*

Specify number of tests that you want the Automatic Orange Tester to run. The more the number of tests, the greater the possibility of finding a run-time error, but longer it takes to complete.

### Set Option

**User interface:** In your project configuration, the option is on the **Advanced Settings** node. See “Dependencies” on page 1-332 for other options you must also enable.

**Command line:** Use the option `-automatic-orange-tester-tests-number`. See “Command-Line Information” on page 1-333.

### Settings

**Default:** 500

Enter number of tests up to a maximum of 100,000.

### Dependencies

This option is enabled only if you set the following options:

- Set Source code language (`-lang`) to C.
- Turn on Automatic Orange Tester (`-automatic-orange-tester`).

## Command-Line Information

**Parameter:** -automatic-orange-tester-tests-number

**Value:** *positive integer*

**Default:** 500

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -lang c -automatic-orange-tester -automatic-orange-tester-tests-number 500

## See Also

Automatic Orange Tester (-automatic-orange-tester) | Maximum loop iterations (-automatic-orange-tester-loop-max-iteration) | Maximum test time (-automatic-orange-tester-timeout)

## Topics

“Test Orange Checks for Run-Time Errors” (Polyspace Code Prover)

## Maximum test time (-automatic-orange-tester-timeout)

Specify time in seconds allowed for a single test in Automatic Orange Tester

### Description

*This option affects a Code Prover analysis only.*

Specify time in seconds allowed for a single test. After this time is over, the Automatic Orange Tester proceeds to the next test. Increasing this time reduces number of tests that do not complete, but increases total verification time.

### Set Option

**User interface:** In your project configuration, the option is on the **Advanced Settings** node. See “Dependencies” on page 1-334 for other options you must also enable.

**Command line:** Use the option `-automatic-orange-tester-timeout`. See “Command-Line Information” on page 1-335.

### Settings

**Default:** 5

Enter time in seconds. The maximum value that the software supports is 60.

### Dependencies

This option is enabled only if you set the following options:

- Set Source code language (`-lang`) to C.
- Turn on Automatic Orange Tester (`-automatic-orange-tester`).

## Command-Line Information

**Parameter:** -automatic-orange-tester-timeout

**Value:** *time*

**Default:** 5

**Example:** polyspace-code-prover-nodesktop -sources *file\_name* -lang c -automatic-orange-tester -automatic-orange-tester-test-timeout 10

## See Also

Automatic Orange Tester (-automatic-orange-tester) | Number of automatic tests (-automatic-orange-tester-tests-number) | Maximum loop iterations (-automatic-orange-tester-loop-max-iteration)

## Topics

“Test Orange Checks for Run-Time Errors” (Polyspace Code Prover)

## Other

Specify additional flags for analysis

## Description

Enter command-line-style flags such as `-max-processes`.

## Set Option

In your project configuration, the option is on the **Advanced Settings** node. You can enter multiple options in this field. If you enter the same option multiple times with different arguments, the analysis uses your last argument.

## Why Use This Option

Use this option to add nonofficial or command-line only options to the analyzer.

## Tip

Nonofficial options: In rare circumstances, to work around very specific issues, MathWorks Technical Support might provide you some undocumented options. If you are running verification from the user interface, you use the **Other** field in the **Configuration** pane to enter the options. Sometimes, the options and their arguments have to be preceded by extra flags. When providing you the option, Technical Support will let you know if the extra flags are required.

**Possible Flags:** `-extra-flags` | `-c-extra-flags` | `-cpp-extra-flags` | `-cfe-extra-flags` | `-il-extra-flags`

**Example:** `polyspace-bug-finder-nodesktop -extra-flags -option-name -extra-flags option_param`

## **Oops! This page does not exist.**

You are looking for a nonexistent resource.

### **Check Other Locations**

You may be able to find what you need here:

- [Full Bug Finder documentation](#)
- [Full Code Prover documentation](#)



# Polyspace Command-Line Options

---

# -asm-begin -asm-end

Exclude compiler-specific asm functions from analysis

## Syntax

```
-asm-begin "mark1[,mark2,...]" -asm-end "mark1[,mark2,...]"
```

## Description

-asm-begin "mark1[,mark2,...]" -asm-end "mark1[,mark2,...]" excludes compiler-specific assembly language source code functions from the analysis. You must use these two options together.

Polyspace recognizes most inline assemblers by default. Use the option only if compilation errors occur due to introduction of assembly code.

Mark the offending code block by two #pragma directives, one at the beginning of the assembly code and one at the end. In the command usage, give these marks in the same order for -asm-begin as they are for -asm-end.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

## Examples

A block of code is delimited by #pragma start1 and #pragma end1. These names must be in the same order for their respective options. Either:

```
-asm-begin "start1" -asm-end "end1"
```

or

```
-asm-begin "mark1,...markN,start1" -asm-end "mark1,...markN,end1"
```

The following example marks two functions for exclusion, foo\_1 and foo\_2.

Code:

```
#pragma asm_begin_foo
int foo(void) { /* asm code to be ignored by Polyspace */ }
#pragma asm_end_foo

#pragma asm_begin_bar
void bar(void) { /* asm code to be ignored by Polyspace */ }
#pragma asm_end_bar
```

Polyspace Command:

```
polyspace-bug-finder-nodesktop -lang c -asm-begin "asm_begin_foo,asm_begin_bar"
                                -asm-end "asm_end_foo,asm_end_bar"
```

`asm_begin_foo` and `asm_begin_bar` mark the beginning of the assembly source code sections to be ignored. `asm_end_foo` and `asm_end_bar` mark the end of those respective sections.

## See Also

`polyspace-bug-finder-nodesktop`

## Topics

“Run Polyspace Analysis from Command Line”

# -author

Specify project author

## Syntax

```
-author "value"
```

## Description

-author "value" assigns an author to the Polyspace project. The name appears as the project owner in Polyspace Metrics and on generated reports.

The default value is the user name of the current user, given by the DOS or UNIX command `whoami`.

In the Polyspace user interface, select  to specify the Project name, Version, and Author parameters in the **Polyspace Project - Properties** dialog box.

## Examples

Assign a project author to your Polyspace Project.

```
polyspace-bug-finder-nodesktop -author "John Smith"
```

## See Also

```
-date | -prog | polyspace-bug-finder-nodesktop
```

## Topics

“Run Polyspace Analysis from Command Line”

## **-date**

Specify date of analysis

## **Syntax**

`-date "date"`

## **Description**

`-date "date"` specifies the date stamp for the analysis in the format dd/mm/yyyy. By default the value is the date the analysis starts.

## **Examples**

Assign a date to your Polyspace Project.

```
polyspace-bug-finder-nodesktop -date "15/03/2012"
```

## **See Also**

`-author` | `-prog` | `polyspace-bug-finder-nodesktop`

## **Topics**

“Run Polyspace Analysis from Command Line”

# -function-behavior-specifications

Map imprecisely analyzed function to standard function for precise analysis

## Syntax

`-function-behavior-specifications file_path`

## Description

`-function-behavior-specifications file_path` specifies the path to an XML file. You can use this XML file to map some of your functions to corresponding standard functions that Polyspace recognizes. If you run verification from the command line, *file\_path* is the absolute path or path relative to the folder from which you run the command. If you run verification from the user interface, *file\_path* is the absolute path.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

## Using Option for Precision Improvement

*This section applies only to a Code Prover analysis.*

Use this option to reduce the number of orange checks from imprecise analysis of your function. Sometimes, the verification does not analyze certain kinds of functions precisely because of inherent limitations in static verification. In those cases, if you find a standard function that is a close analog of your function, use this mapping. Though your function itself is not analyzed, the analysis is more precise at the locations where you call the function. For instance, if the verification cannot analyze your function `cos32` precisely and considers full range for its return value, map it to the `cos` function for a return value in `[-1,1]`.

The verification ignores the body of your function. However, the verification emulates your function behavior in the following ways:

- The verification assumes the same return values for your function as the standard function.

For instance, if you map your function `cos32` to the standard function `cos`, the verification assumes that `cos32` returns values in `[-1,1]`.

- The verification checks for the same issues as it checks with the standard function.

For instance, if you map your function `acos32` to the standard function `acos`, the `Invalid use of standard library routine` check determines if the argument of `acos32` is in `[-1,1]`.

A sample file `function-behavior-specifications-sample.xml` shows the functions that you can map to. The file is in `matlabroot\polyspace\verifier\cxx\` where `matlabroot` is the MATLAB installation folder. The functions that you can map to include:

- Standard library functions from `math.h`.
- Memory management functions from `string.h`.
- `__ps_meminit`: A function specific to Polyspace that initializes a memory area.

Sometimes, the verification does not recognize your memory initialization function and produces an orange `Non-initialized local variable` check on a variable that you initialized through this function. If you know that your memory initialization function initializes the variable through its address, map your function to `__ps_meminit`. The check turns green.

- `__ps_lookup_table_clip`: A function specific to Polyspace that returns a value within the range of the input array.

Sometimes, the verification considers full range for the return values of functions that look up values in large arrays (look-up table functions). If you know that the return value of a look-up table function must be within the range of values in its input array, map the function to `__ps_lookup_table_clip`.

In code generated from models, the verification by default makes this assumption for look-up table functions. To identify if the look-up table uses linear interpolation and no extrapolation, the verification uses the function names. See “Stub lookup tables” (Polyspace Code Prover). Use the mapping only for handwritten functions, for instance, functions in a C/C++ S-Function block. The names of those functions do not follow specific conventions. You must explicitly specify them.

## Using Option for Concurrency Detection

*This section applies both to a Bug Finder and a Code Prover analysis.*

Use this option for automatic detection of thread-creation functions and functions that begin and end critical sections. Polyspace supports automatic detection for certain families of multitasking primitives only. Extend the support using this option.

If your thread-creation function, for instance, does not belong to one of the supported families, map your function to a supported concurrency primitive.

To find which multitasking primitives can be automatically detected, see “Auto-Detection of Thread Creation and Critical Section in Polyspace”.

## Examples

### Specify Mapping to Standard Function

You can adapt the sample mapping XML file provided with your Polyspace installation and map your function to a standard function.

Suppose the default verification produces an orange `User assertion` check on this code:

```
double x = acos32(1.0) ;
assert(x <= 2.0);
```

Suppose you know that the function `acos32` behaves like the function `acos` and the return value is 0. You expect the check on the `assert` statement to be green. However, the verification considers that `acos32` returns any value in the range of type `double` because `acos32` is not precisely analyzed. The check is orange. To map your function `acos32` to `acos`:

- 1 Copy the file `function-behavior-specifications-sample.xml` from `matlabroot\polyspace\verifier\cxx\` to another location, for instance, `C:\Polyspace_projects\Common\Config_files`. Change the write permissions on the file.
- 2 To map your function to a standard function, modify the contents of the XML file. To map your function `acos32` to the standard library function `acos`, change the following code:

```
<function name="my_lib_cos" std="acos"> </function>
```

To:

```
<function name="acos32" std="acos"> </function>
```

- 3 Specify the location of the file for verification.

```
polyspace-code-prover-nodesktop -function-behavior-specifications
"C:\Polyspace_projects\Common\Config_files
\function-behavior-specifications-sample.xml"
```

## Specify Mapping to Standard Function with Argument Remapping

Sometimes, the arguments of your function do not map one-to-one with arguments of the standard function. In those cases, remap your function argument to the standard function argument. For instance:

- `__ps_lookup_table_clip`:

This function specific to Polyspace takes only a look-up table array as argument and returns values within the range of the look-up table. Your look-up table function might have additional arguments besides the look-up table array itself. In this case, use argument remapping to specify which argument of your function is the look-up table array.

For instance, suppose a function `my_lookup_table` has the following declaration:

```
double my_lookup_table(double u0, const real_T *table,
                       const double *bp0);
```

The second argument of your function `my_lookup_table` is the look-up table array. In the file `function-behavior-specifications-sample.xml`, add this code:

```
<function name="my_lookup_table" std="__ps_lookup_table_clip">
  <mapping std_arg="1" arg="2"></mapping>
</function>
```

When you call the function:

```
res = my_lookup_table(u, table10, bp);
```

The verification interprets the call as:

```
res = __ps_lookup_table_clip(table10);
```

The verification assumes that the value of `res` lies within the range of values in `table10`.

- `__ps_meminit`:

This function specific to Polyspace takes a memory address as the first argument and a number of bytes as the second argument. The function assumes that the bytes in memory starting from the memory address are initialized with a valid value. Your memory initialization function might have additional arguments. In this case, use argument remapping to specify which argument of your function is the starting address and which argument is the number of bytes.

For instance, suppose a function `my_meminit` has the following declaration:

```
void my_meminit(enum InitKind k, void* dest, int is_aligned,
                unsigned int size);
```

The second argument of your function is the starting address and the fourth argument is the number of bytes. In the file `function-behavior-specifications-sample.xml`, add this code:

```
<function name="my_meminit" std="__ps_meminit">
  <mapping std_arg="1" arg="2"></mapping>
  <mapping std_arg="2" arg="4"></mapping>
</function>
```

When you call the function:

```
my_meminit(INIT_START_BY_END, &buffer, 0, sizeof(buffer));
```

The verification interprets the call as:

```
__ps_meminit(&buffer, sizeof(buffer));
```

The verification assumes that `sizeof(buffer)` number of bytes starting from `&buffer` are initialized.

- `memset`: Variable number of arguments.

If your function has variable number of arguments, you cannot map it directly to a standard function without explicit argument remapping. For instance, say your function is declared as:

```
void* my_memset(void*, int, size_t, ...)
```

To map the function to the `memset` function, use the following mapping:

```

<function name="my_memset" std="memset">
  <mapping std_arg="1" arg="1"></mapping>
  <mapping std_arg="2" arg="2"></mapping>
  <mapping std_arg="3" arg="3"></mapping>
</function>

```

## Effect of Mapping on Precision

These examples show the result of mapping certain functions to standard functions:

- `my_acos` → `acos`:

If you use the mapping, the `User assertion` check turns green. The verification assumes that the return value of `my_acos` is 0.

- *Before mapping:*

```
double x = my_acos(1.0);
assert(x <= 2.0);
```

- *Mapping specification:*

```
<function name="my_acos" std="acos">
</function>
```

- *After mapping:*

```
double x = my_acos(1.0);
assert(x <= 2.0);
```

- `my_sqrt` → `sqrt`:

If you use the mapping, the `Invalid use of standard library routine` check turns red. Otherwise, the verification does not check whether the argument of `my_sqrt` is nonnegative.

- *Before mapping:*

```
res = my_sqrt(-1.0);
```

- *Mapping specification:*

```
<function name="my_sqrt" std="sqrt">
</function>
```

- *After mapping:*

```
res = my_sqrt(-1.0);
```

- `my_lookup_table` (argument 2) → `__ps_lookup_table_clip` (argument 1):

If you use the mapping, the `User assertion` check turns green. The verification assumes that the return value of `my_lookup_table` is within the range of the look-up table array `table`.

- *Before mapping:*

```
double table[3] = {1.1, 2.2, 3.3}
.
.
double res = my_lookup_table(u, table, bp);
assert(res >= 1.1 && res <= 3.3);
```

- *Mapping specification:*

```
<function name="my_lookup_table" std="__ps_lookup_table_clip">
  <mapping std_arg="1" arg="2"></mapping>
</function>
```

- *After mapping:*

```
double table[3] = {1.1, 2.2, 3.3}
.
.
res_real = my_lookup_table(u, table9, bp);
assert(res_real >= 1.1 && res_real <= 3.3);
```

- `my_meminit` → `__ps_meminit`:

If you use the mapping, the `Non-initialized local variable` check turns green. The verification assumes that all fields of the structure `x` are initialized with valid values.

- *Before mapping:*

```
struct X {
  int field1 ;
  int field2 ;
};
.
.
struct X x;
my_meminit(&x, sizeof(struct X));
return x.field1;
```

- *Mapping specification:*

```
<function name="my_meminit" std="__ps_meminit">
  <mapping std_arg="1" arg="1"></mapping>
  <mapping std_arg="2" arg="2"></mapping>
</function>
```

- *After mapping:*

```
struct X {
  int field1 ;
  int field2 ;
};
.
.
struct X x;
my_meminit(&x, sizeof(struct X));
return x.field1;
```

- `my_meminit` → `__ps_meminit`:

If you use the mapping, the `Non-initialized local variable` check turns red. The verification assumes that only the field `field1` of the structure `x` is initialized with valid values.

- *Before mapping:*

```
struct X {
  int field1 ;
  int field2 ;
};
.
.
struct X x;
my_meminit(&x, sizeof(int));
return x.field2;
```

- *Mapping specification:*

```
<function name="my_meminit" std="__ps_meminit">
</function>
```

- *After mapping:*

```
struct X {
  int field1 ;
  int field2 ;
```

```
};  
.  
.  
struct X x;  
my_meminit(&x, sizeof(int));  
return x.field2;
```

### Effect of Mapping on Concurrency Detection

In this example, the Polyspace support for automatic concurrency detection is extended by mapping unsupported functions to the supported Pthreads functions.

- Thread creation function: `createTask` → `pthread_create`
- Function that begins critical section: `takeLock` → `pthread_mutex_lock`
- Function that ends critical section: `releaseLock` → `pthread_mutex_unlock`

If you use the mapping, a Bug Finder analysis can determine the multitasking model used in your code and find possible race conditions.

- *Before mapping:*

The analysis does not detect the data race on `var2`.

```
typedef void* (*FUNT) (void*);  
  
extern int takeLock(int* t);  
extern int releaseLock(int* t);  
// First argument is the function, second the id  
extern int createTask(FUNT,int*,int*,void*);  
  
int t_id1,t_id2;  
int lock;  
  
int var1;  
int var2;  
  
void* task1(void* a) {  
    takeLock(&lock);  
    var1++;  
    var2++;  
    releaseLock(&lock);  
    return 0;  
}
```

```

void* task2(void* a) {
    takeLock(&lock);
    var1++;
    releaseLock(&lock);
    var2++;
    return 0;
}

void main() {
    createTask(task1,&t_id1,0,0);
    createTask(task2,&t_id2,0,0);
}

```

- *Mapping specification:*

Based on the number and type of parameters of the function `createTask`, it is convenient to map `createTask` to the thread creation function `pthread_create`. The other available alternatives, `createThread` or `OSTaskCreate`, have different argument types.

Even when mapping to `pthread_create`, argument remapping is required, because the arguments do not correspond exactly. The thread start routine is the third argument of `pthread_create` but the first argument of `createTask`.

```

<function name="createTask" std="pthread_create" >
    <mapping std_arg="1" arg="2"></mapping>
    <mapping std_arg="3" arg="1"></mapping>
    <mapping std_arg="2" arg="3"></mapping>
    <mapping std_arg="4" arg="4"></mapping>
</function>
<function name="takeLock" std="pthread_mutex_lock" >
</function>
<function name="releaseLock" std="pthread_mutex_unlock" >
</function>

```

For the list of supported functions that you can map to, see the sample mapping file `function-behavior-specifications-sample.xml` in `matlabroot\polyspace\verifier\cxx\matlabroot` is the MATLAB installation folder, such as `C:\Program Files\MATLAB\R2017b`. See also “Auto-Detection of Thread Creation and Critical Section in Polyspace”.

- *After mapping:*

The analysis detects the data race on `var2`.

```
typedef void* (*FUNT) (void*);

extern int takeLock(int* t);
extern int releaseLock(int* t);
// First argument is the function, second the id
extern int createTask(FUNT,int*,int*,void*);

int t_id1,t_id2;
int lock;

int var1;
int var2;

void* task1(void* a) {
    takeLock(&lock);
    var1++;
    var2++;
    releaseLock(&lock);
    return 0;
}

void* task2(void* a) {
    takeLock(&lock);
    var1++;
    releaseLock(&lock);
    var2++;
    return 0;
}

void main() {
    createTask(task1,&t_id1,0,0);
    createTask(task2,&t_id2,0,0);
}
```

## See Also

“Stub lookup tables” (Polyspace Code Prover) | `polyspace-bug-finder-nodesktop`

## Topics

“Reduce Orange Checks” (Polyspace Code Prover)

“Run Polyspace Analysis from Command Line”

**Introduced in R2016b**

## -generate-launching-script-for

Extract information from project file

### Syntax

`-generate-launching-script-for PRJFILE`

### Description

`-generate-launching-script-for PRJFILE` extracts information from the project file *PRJFILE* so that you can run an analysis from the command line. A folder is created containing the following files:

- `source_command.txt` — List of source files for the `-sources-list-file` option.
- `options_command.txt` — List of the analysis options for the `-options-file` option.
- `temporal_exclusions.txt` — List of temporal exclusions, generated only if you specify the Temporally exclusive tasks (`-temporal-exclusions-file`) option.
- `.polyspace_conf.psprj` — A copy of the project file Polyspace used to generate the scripting files.
- `launchingCommand.sh` (UNIX) or `launchingCommand.bat` (DOS) — shell script that calls the correct commands. The script also calls any options that cannot be given to the `-options-file` command, such as `-batch` or `-add-to-results-repository`. You can give this file additional analysis options as parameters.

---

**Note** The script that Polyspace generates runs the same analysis that Polyspace runs from the user interface. If your project runs in the Polyspace user interface, the script will run from the command line.

---

## Examples

Extract information to run `myproject` from the command line. Use this option with the desktop binary `polyspace`.

```
polyspace -generate-launching-script-for myproject.psprj -bug-finder
```

## See Also

### Topics

“Create Command-Line Script from Project File”

“Run Polyspace Analysis from Command Line”

### **-h[elp]**

Display list of possible options

### **Syntax**

-h  
-help

### **Description**

-h and -help display the list of possible options in the shell window and the argument syntax.

### **Examples**

Display the command-line help.

```
polyspace-bug-finder-nodesktop -h  
polyspace-bug-finder-nodesktop -help
```

### **See Also**

polyspace-bug-finder-nodesktop

### **Topics**

“Run Polyspace Analysis from Command Line”

## **-I**

Specify include folder for compilation

## **Syntax**

`-I folder`

## **Description**

`-I folder` specifies a folder that contains include files required for compiling your sources. You can specify only one folder for each instance of `-I`. However, you can specify this option multiple times.

The analysis looks for include files relative to the folder paths that you specify. For instance, if your code contains the preprocessor directive `#include<./mylib.h>` and you include the folder:

```
C:\My_Project\MySourceFiles\Includes
```

the folder `C:\My_Project\MySourceFiles` must contain a file `mylib.h`.

The analysis automatically includes the `./sources` folder (if it exists) after the include folders that you specify.

## **Examples**

Include two folders with the analysis.

```
polyspace-bug-finder-nodesktop -I /com1/inc -I /com1/sys/inc
```

Because `./sources` is included automatically, this Polyspace command is equivalent to:

```
polyspace-bug-finder-nodesktop -I /com1/inc -I /com1/sys/inc  
                                -I ./sources
```

## **See Also**

polyspace-bug-finder-nodesktop

## **Topics**

“Run Polyspace Analysis from Command Line”

# -import-comments

Import comments and justifications from previous analysis

## Syntax

```
-import-comments resultsFolder
```

## Description

`-import-comments resultsFolder` imports the comments and justifications from a previous analysis, as specified by the results folder.

You can import comments from the same type of results only. For instance:

- You cannot import comments from a results of a Bug Finder checker to a Code Prover run-time check. Even when the checker names sound similar, the underlying semantics of Bug Finder and Code Prover can be different. The only exception is checkers for coding rules. You can import comments between Bug Finder and Code Prover for coding rule violations.
- You cannot import comments from results of a file-by-file verification in Code Prover to results of a regular Code Prover verification.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

## Examples

Increment your project's version number (`-version`) and import comments from the previous results.

```
polyspace-bug-finder-nodesktop -version 1.3  
-import-comments C:\Results\myProj\1.2
```

## **See Also**

-version | polyspace-bug-finder-nodesktop

## **Topics**

“Import Comments from Previous Polyspace Analysis”

## -no-assumption-on-absolute-addresses

Remove assumption that absolute address usage is valid

### Syntax

-no-assumption-on-absolute-addresses

### Description

*This option affects Code Prover analysis only.*

-no-assumption-on-absolute-addresses removes the default assumption that absolute addresses used in your code are valid. If you use this option, the verification produces an orange `Absolute address usage` check when you assign an absolute address to a pointer. Otherwise, the check is green by default.

The type of the pointer to which you assign the address determines the initial value stored in the address. For instance, if you assign the address to an `int*` pointer, following this check, the verification assumes that the memory zone that the address points to is initialized with an `int` value. The value can be anything allowed for the data type `int`.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

### Examples

The use of option -no-assumption-on-absolute-addresses can increase the number of orange checks in your code. For instance, the following table shows an additional orange check with the option enabled.

Absolute Address Usage Green	Absolute Address Usage Orange
<pre>void main() {     int *p = (int *)0x32;     int x;     x=*p; }</pre>	<pre>void main() {     int *p = (int *)0x32;     int x;     x=*p; }</pre>
<p>In this example, the software produces:</p> <ul style="list-style-type: none"> <li>• A green <b>Absolute address usage</b> check when the address 0x32 is assigned to a pointer p.</li> <li>• A green <b>Illegally dereferenced pointer</b> check when the pointer p is read.</li> </ul> <p>x potentially has all values allowed for an int variable.</p>	<p>In this example, the software produces:</p> <ul style="list-style-type: none"> <li>• An orange <b>Absolute address usage</b> check when the address 0x32 is assigned to a pointer p.</li> <li>• A green <b>Illegally dereferenced pointer</b> check when the pointer p is read.</li> </ul> <p>x potentially has all values allowed for an int variable.</p>

For best use of the **Absolute address usage** check, leave this check green by default during initial stages of development. During integration stage, use the option `-no-assumption-on-absolute-addresses` and detect all uses of absolute memory addresses. Browse through them and make sure that the addresses are valid.

## See Also

`polyspace-code-prover-nodesktop`

## Topics

“Run Polyspace Analysis from Command Line” (Polyspace Code Prover)

**Introduced in R2016a**

## **-max-processes**

Specify maximum number of processors for analysis

### **Syntax**

`-max-processes num`

### **Description**

`-max-processes num` specifies the maximum number of processes that you want the analysis to use. On a multicore system, the software parallelizes the analysis and creates the specified number of processes to speed up the analysis. The valid range of *num* is 1 to 128.

Unless you specify this option, the Bug Finder analysis uses the maximum number of available processes. Use this option to restrict the number of processes used.

To use this option effectively, determine the number of processors available for use. If the number of processes you create is greater than the number of processors available, the analysis does not benefit from the parallelization. Check the system information in your operating system. When you start a verification, a message states the number of logical processors detected on your system.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

### **Examples**

Disable parallel processing during the analysis.

```
polyspace-bug-finder-nodesktop -max-processes 1
```

### **Tips**

You must have at least 4 GB of RAM per processor for analysis. For instance, if your machine has 16 GB of RAM, do not use this option to specify more than four processes.

### **See Also**

`polyspace-bug-finder-nodesktop`

### **Topics**

“Run Polyspace Analysis from Command Line”

## -non-preemptable-tasks

Specify functions that represent nonpreemptable tasks

### Syntax

```
-non-preemptable-tasks function1[,function2[,...]]
```

### Description

*This option affects a Bug Finder analysis only.*

`-non-preemptable-tasks function1[,function2[,...]]` specifies functions that represent nonpreemptable tasks.

The functions cannot be interrupted by other noncyclic Tasks on page 1-119 and cyclic tasks on page 1-121 but can be interrupted by interrupts on page 1-124, preemptable or nonpreemptable.

To specify a function as a nonpreemptable cyclic task, you must first specify the following options:

- `Configure multitasking manually`
- `Tasks (-entry-points)` or `Cyclic tasks (-cyclic-tasks)`: Specify the function name.

The functions that you specify must have the prototype:

```
void function_name(void);
```

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

### See Also

`-preemptable-interrupts` | `Cyclic tasks (-cyclic-tasks)` | `Interrupts (-interrupts)` | `Tasks (-entry-points)` | `Critical section details (-`

`critical-section-begin -critical-section-end` | Temporally exclusive tasks  
`(-temporal-exclusions-file) | polyspace-bug-finder-nodesktop`

### **Topics**

*"Specify Polyspace Analysis Options"*

*"Analyze Multitasking Programs in Polyspace"*

*"Configuring Polyspace Multitasking Analysis Manually"*

*"Protections for Shared Variables in Multitasking Code"*

### **Introduced in R2016b**

## -options-file

Run Polyspace using list of options

### Syntax

`-options-file file`

### Description

`-options-file file` specifies a file which lists your analysis options. The file must be a text file with each option on a separate line. Use `#` to add comments to this file.

### Examples

- 1 Create an options file called `listofoptions.txt` with your options. For example:

```
#These are the options for MyBugFinderProject
-lang c
-prog MyBugFinderProject
-author jsmith
-sources "mymain.c,funAlgebra.c,funGeometry.c"
-target x86_64
-compiler generic
-dos
-misra2 required-rules
-do-not-generate-results-for all-headers
-checkers default
-disable-checkers concurrency
-results-dir C:\Polyspace\MyBugFinderProject
```

- 2 Run Polyspace using options in the file `listofoptions.txt`.

```
polyspace-bug-finder-nodesktop -options-file listofoptions.txt
```

## **See Also**

`polyspace-bug-finder-nodesktop` | `polyspaceConfigure`

## **Topics**

“Run Polyspace Analysis from Command Line”

## -options-for-sources

Specify analysis options specific to a source file

### Syntax

`-options-for-sources filename options`

### Description

`-options-for-sources filename options` associates a semicolon-separated list of Polyspace analysis options with the source file specified by *filename*.

This option is primarily used when the `polyspace-configure` command creates an options file for the subsequent Polyspace analysis. The option `-options-for-sources` associates a group of analysis options such as include folders and macro definitions with specific source files.

However, you can directly enter this option when manually writing options files. This option is useful in situations where you want to associate a group of options with a specific source file without applying it to other files.

Instead of an options file, you can also create a Polyspace project from your build command. See “Add Sources from Build Command”. The project uses the option `-options-for-sources` to associate specific Polyspace analysis options with specific files. However, when you open the project in the Polyspace user interface, you cannot see the use of this option. Open the project in a text editor to see this option.

### Examples

In this sample options file, the include folder `/usr/lib/gcc/x86_64-linux-gnu/6/include` and the macros `__STDC_VERSION__` and `__GNUC__` are associated only with the source file `file.c` and not `fileAnother.c`.

```
-options-for-sources file.c;-I /usr/lib/gcc/x86_64-linux-gnu/6/include;  
-options-for-sources file.c;-D __STDC_VERSION__=201112L;-D __GNUC__=6;  
-sources file.c  
-sources fileAnother.c
```

For the options used in this example, see:

- -sources
- -I
- Preprocessor definitions (-D)

### See Also

`-options-file | polyspace-bug-finder-nodesktop`

### Topics

“Run Polyspace Analysis from Command Line”

## -preemptable-interrupts

Specify functions that represent preemptable interrupts

### Syntax

```
-preemptable-interrupts function1[,function2[,...]]
```

### Description

*This option affects a Bug Finder analysis only.*

`-preemptable-interrupts function1[,function2[,...]]` specifies functions that represent preemptable interrupts.

The function acts as an interrupt in every way except that it can be interrupted by other interrupts on page 1-124, preemptable or nonpreemptable.

To specify a function as a preemptable interrupt, you must first specify the following options:

- Configure multitasking manually
- Interrupts (`-interrupts`): Specify the function name.

The functions that you specify must have the prototype:

```
void function_name(void);
```

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

### See Also

`-non-preemptable-tasks` | Cyclic tasks (`-cyclic-tasks`) | Interrupts (`-interrupts`) | Tasks (`-entry-points`) | Critical section details (`-critical-section-begin -critical-section-end`) | Temporally exclusive tasks (`-temporal-exclusions-file`) | `polyspace-bug-finder-nodesktop`

### **Topics**

“Specify Polyspace Analysis Options”

“Analyze Multitasking Programs in Polyspace”

“Configuring Polyspace Multitasking Analysis Manually”

“Protections for Shared Variables in Multitasking Code”

**Introduced in R2016b**

## **-prog**

Specify name of project

## **Syntax**

`-prog projectName`

## **Description**

`-prog projectName` specifies the name of your Polyspace project. This name must use only letters, numbers, underscores (`_`), dashes (`-`), or periods (`.`).

## **Examples**

Assign a session name to your Polyspace Project.

```
polyspace-bug-finder-nodesktop -prog MyApp
```

## **See Also**

`-author` | `-date` | `polyspace-bug-finder-nodesktop`

## **Topics**

“Run Polyspace Analysis from Command Line”

## -regex-replace-rgx -regex-replace-fmt

Make replacements in preprocessor directives

### Syntax

```
-regex-replace-rgx matchFileName -regex-replace-fmt  
replacementFileName
```

### Description

-regex-replace-rgx *matchFileName* -regex-replace-fmt *replacementFileName* replaces tokens in preprocessor directives for the purposes of Polyspace analysis. The original source code is unchanged. You match a token using a regular expression in the file *matchFileName* and replace the token using a replacement in the file *replacementFileName*.

Use this option only to replace or remove tokens in the preprocessor directives *before preprocessing*. If a token in your source code causes a compilation error, you can typically replace or remove the token from the preprocessed code. Use the more convenient option Command/script to apply to preprocessed files (-post-preprocessing-command). You cannot make the replacements in preprocessed code only for tokens in preprocessor directives.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

In the user interface, specify absolute paths to the text files with the search and replace patterns.

### Examples

Suppose you want to replace `_rom_beg` in this `#define` directive:

```
#define ROM_BEG_ADDR (uint16*)&_rom_beg
```

and modify the directive to:

```
#define ROM_BEG_ADDR (0x4000u)
```

Specify this regular expression in a file `match.txt`:

```
^\s*#define\s+ROM_BEG_ADDR\s+\(uint16_t\*\)\(\&_rom_beg\)
```

These elements are used in the regular expression:

- `^` asserts position at the start of a line.
- `\s*` represents zero or more whitespace characters.
- `\s+` represents one or more whitespace characters.

The characters `*`, `&`, `(` and `)` in the original expression are escaped with `\`. For a complete list of regular expressions, see Perl documentation.

Specify the replacement in a file `replace.txt`.

```
#define ROM_BEG_ADDR \ (0x4000u\)
```

Specify the two text files during analysis with the options `-regex-replace-rgx` and `-regex-replace-fmt`.

```
polyspace-code-prover-nodesktop -sources filename  
                                -regex-replace-rgx match.txt  
                                -regex-replace-fmt replace.txt
```

## See Also

Command/script to apply to preprocessed files (`-post-preprocessing-command`) | `polyspace-bug-finder-nodesktop`

## Topics

“Run Polyspace Analysis from Command Line”

## -report-output-name

Specify name of report

### Syntax

-report-output-name *reportName*

### Description

-report-output-name *reportName* specifies the name of an analysis report.

The default name for a report is *Prog\_Template.Format*:

- *Prog* is the name of the project specified by -prog.
- *TemplateName* is the type of report template specified by -report-template.
- *Format* is the file extension for the report specified by -report-output-format.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

### Examples

Specify the name of the analysis report.

```
polyspace-bug-finder-nodesktop -report-template Developer  
-report-output-name Airbag_v3.doc
```

### See Also

Output format (-report-output-format) | Bug Finder and Code Prover  
report (-report-template) | polyspace-bug-finder-nodesktop

## **Topics**

“Generate Reports”

### **-results-dir**

Specify the results folder

### **Syntax**

`-results-dir`

### **Description**

`-results-dir` specifies where to save the analysis results. The default location at the command line is the current folder.

If you are running analysis in the user interface, see “Run Polyspace Analysis on Desktop”.

### **Examples**

Specify to store your results in the RESULTS folder.

```
polyspace-bug-finder-nodesktop -results-dir RESULTS ...  
    export RESULTS=results_'date + %d%B_%HH%M_%A'  
polyspace-bug-finder-nodesktop -results-dir 'pwd'/$RESULTS
```

### **See Also**

`polyspace-bug-finder-nodesktop`

### **Topics**

“Run Polyspace Analysis from Command Line”

## **-scheduler**

Specify cluster or job scheduler

### **Syntax**

`-scheduler schedulingOption`

### **Description**

`-scheduler schedulingOption` specifies the head node of the cluster or MATLAB job scheduler on the node host. Use this command to manage the cluster, or to specify where to run batch analyses.

### **Examples**

Run a batch analysis on a remote server.

```
polyspace-bug-finder-nodesktop -batch -scheduler NodeHost  
polyspace-bug-finder-nodesktop -batch -scheduler 192.168.1.124:12400  
polyspace-bug-finder-nodesktop -batch -scheduler MJSName@NodeHost  
  
polyspace-job-manager listjobs -scheduler NodeHost
```

### **See Also**

`polyspace-bug-finder-nodesktop` | `polyspaceJobsManager`

### **Topics**

“Run Polyspace Analysis on Remote Clusters Using Scripts”

### **-sources**

Specify source files

### **Syntax**

```
-sources file1[,file2,...]  
-sources file1 -sources file2
```

### **Description**

`-sources file1[,file2,...]` or `-sources file1 -sources file2` specifies the list of source files that you want to analyze. You can use standard UNIX wildcards with this option to specify your sources.

The source files are compiled in the order in which they are specified.

### **Examples**

Analyze the files `mymain.c`, `funAlgebra.c`, and `funGeometry.c`.

```
polyspace-bug-finder-nodesktop -sources mymain.c  
    -sources funAlgebra.c -sources funGeometry.c
```

### **See Also**

`polyspace-bug-finder-nodesktop`

### **Topics**

“Run Polyspace Analysis from Command Line”

## **-sources-list-file**

Specify file containing list of sources

### **Syntax**

```
-sources-list-file file_path
```

### **Description**

`-sources-list-file file_path` specifies the absolute path to a text file that lists each file name that you want to analyze.

To specify your sources in the text file, on each line, specify the absolute path to a source file. For example:

```
C:\Sources\myfile.c  
C:\Sources2\myfile2.c
```

### **Examples**

Run analysis on files listed in `files.txt`.

```
polyspace-bug-finder-nodesktop -batch -scheduler NODEHOST  
    -sources-list-file "C:\Analysis\files.txt"  
polyspace-bug-finder-nodesktop -batch -scheduler NODEHOST  
    -sources-list-file "/home/polyspace/files.txt"
```

### **See Also**

`polyspace-bug-finder-nodesktop`

### **Topics**

“Run Polyspace Analysis on Remote Clusters Using Scripts”

## **-submit-job-from-previous-compilation-results**

Specify that the analysis job must be resubmitted without recompilation

### **Syntax**

`-submit-job-from-previous-compilation-results`

### **Description**

`-submit-job-from-previous-compilation-results` specifies that the Polyspace analysis must start after the compilation phase with compilation results from a previous analysis. If a remote analysis stops after compilation, for instance because of communication problems between the server and client computers, use this option.

When you perform a remote analysis:

- 1 On the local host computer, the Polyspace software performs code compilation and coding rule checking.
- 2 The Parallel Computing Toolbox™ software submits the analysis job to the MATLAB job scheduler (MJS) on the head node of the MATLAB Distributed Computing Server cluster.
- 3 The head node of the MATLAB Distributed Computing Server cluster assigns the verification job to a worker node, where the remaining phases of the Polyspace analysis occur.

If an analysis stops after completing the first step and you restart the analysis, use this option to reuse compilation results from the previous analysis. You thereby avoid restarting the analysis from the compilation phase.

If previous compilation results do not exist in the current folder, an error occurs. Remove the option and restart analysis from the compilation phase.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

## Examples

Specify remote analysis with compilation results from a previous analysis.

```
polyspace-bug-finder-nodesktop -batch -scheduler localhost  
-submit-job-from-previous-compilation-results
```

## See Also

polyspace-bug-finder-nodesktop

## Topics

“Run Polyspace Analysis on Remote Clusters”

“Run Polyspace Analysis on Remote Clusters Using Scripts”

## **-termination-functions**

Specify process termination functions

### **Syntax**

```
-termination-functions function1[,function2[,...]]
```

### **Description**

`-termination-functions function1[,function2[,...]]` specifies functions that behave like the `exit` function and terminate your program.

Use this option to specify program termination functions that are declared but not defined in your code.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

### **Examples**

Polyspace detects an **Integer division by zero** defect in the following code because it does not recognize that `my_exit` terminates the program.

```
void my_exit();

double reciprocal(int val) {
    if(val==0)
        my_exit();
    return (1/val);
}
```

To prevent Polyspace from flagging the division operation, use the `-termination-functions` option:

```
polyspace-bug-finder-nodesktop -termination-functions my_exit
```

## **See Also**

polyspaceBugFinder

## **Topics**

“Run Polyspace Analysis from Command Line”

# **-tmp-dir-in-results-dir**

Keep temporary files in results folder

## **Syntax**

```
-tmp-dir-in-results-dir
```

## **Description**

`-tmp-dir-in-results-dir` specifies that temporary files must be stored in a subfolder of the results folder. Use this option only when the standard temporary folder does not have enough disk space. If the results folder is mounted on a network drive, this option can slow down your processor.

To learn how Polyspace determines the temporary folder location, see “Storage of Temporary Files”.

If you are running an analysis from the user interface, on the **Configuration** pane, you can enter this option in the **Other** field. See **Other**.

## **Examples**

Store temporary files in the results folder.

```
polyspace-bug-finder-nodesktop -tmp-dir-in-results-dir
```

## **See Also**

```
polyspace-bug-finder-nodesktop
```

## **Topics**

“Run Polyspace Analysis from Command Line”

## **-v[ersion]**

Display Polyspace version number

### **Syntax**

-v  
-version

### **Description**

-v or -version displays the version number of your Polyspace product.

### **Examples**

Display the version number and release of your Polyspace product.

```
polyspace-bug-finder-nodesktop -v
```

### **See Also**

polyspace-bug-finder-nodesktop

### **Topics**

“Run Polyspace Analysis from Command Line”

# **-xml-annotations-description**

Apply custom code annotations to Polyspace analysis results

## **Syntax**

```
-xml-annotations-description file_path
```

## **Description**

`-xml-annotations-description file_path` uses the annotation syntax defined in the XML file located in *file\_path* to interpret code comments in your source files. You can use the XML file to specify an annotation syntax and map it to the Polyspace annotation syntax. When you run an analysis by using this option, you can justify and hide results with annotations that use your syntax. If you run Polyspace at the command line, *file\_path* is the absolute path or path relative to the folder from which you run the command. If you run Polyspace through the user interface, *file\_path* is the absolute path.

If you are running an analysis through the user interface, you can enter this option in the **Other** field, under the **Advanced Settings** node on the **Configuration** pane. See **Other**.

## **Why Use This Option**

If you have existing annotations from previous code reviews, you can import these annotations to Polyspace. You do not have to review and justify results that you have already annotated. Similarly, if your code comments must adhere to a specific format, you can map and import that format to Polyspace.

## Examples

### Import Existing Annotations for Coding Rule Violations

Suppose that you have previously reviewed source file `zero_div.c` containing the following code, and justified certain MISRA C: 2012 violations by using custom annotations.

```
#include <stdio.h>

/* Violation of Misra C:2012
rules 8.4 and 8.7 on the next
line of code. */

int func(int p) //My_rule 50, 51
{
    int i;
    int j = 1;

    i = 1024 / (j - p);
    return i;
}

/* Violation of Misra C:2012
rule 8.4 on the next line of
code */


int main(void){ //My_rule 50
    int x=func(2);
    return x;
}
```

The code comments **My\_rule 50, 51** and **My\_rule 50** do not use the Polyspace annotation syntax. Instead, you use a convention where you place all MISRA rules in a single numbered list. In this list, rules 8.4 and 8.7 correspond to the numbers 50 and 51. You can check this code for MISRA C: 2012 violations by typing the command:

```
polyspace-bug-finder-nodesktop -sources source_path -misra3 all
```

*source\_path* is the path to `zero_div.c`.

The annotated violations appear in the **Results List** pane. You must review and justify them again.

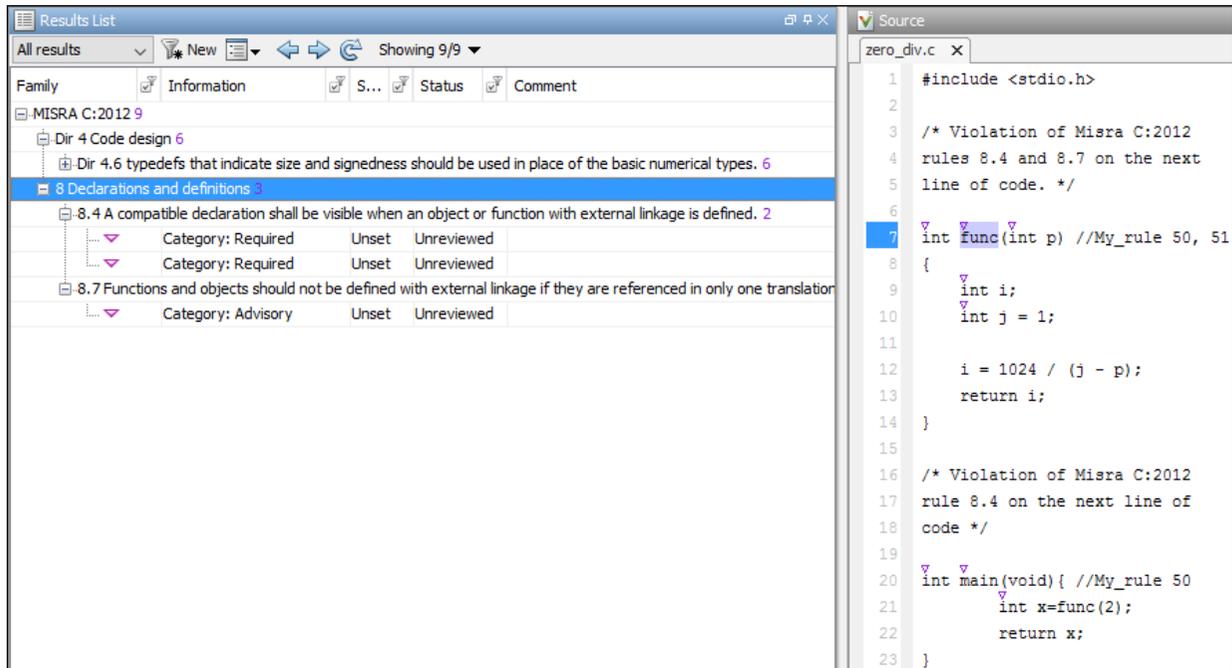

This XML example defines the annotation format used in `zero_div.c` and maps it to the Polyspace annotation syntax:

- The format of the annotation is the keyword `My_rule`, followed by a space and one or more comma-separated alphanumeric rule identifiers.
- Rule identifiers 50 and 51 are mapped to MISRA C: 2012 rules 8.4 and 8.7 respectively. The mapping uses the Polyspace annotation syntax.

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<Annotations xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="annotations_xml_schema.xsd"
  Group="example annotation">
```

```
  <Expressions Search_For_Keywords="My_rule"
    Separator_Result_Name=", " >
```

```
    <!-- This section defines the annotation syntax format -->
    <Expression Mode="SAME_LINE"
```

```
        Regex="My_rule\s(\w+(\s*,\s*\w+)*)"
        Rule_Identifier_Position="1"
    />


</Expressions>
  <!-- This section maps the user annotation to the Polyspace
        annotation syntax -->
  <Mapping>
    <Result_Name_Mapping Rule_Identifier="50" Family="MISRA-C3" Result_Name="8.4"/>
    <Result_Name_Mapping Rule_Identifier="51" Family="MISRA-C3" Result_Name="8.7"/>
  </Mapping>
</Annotations>
```

To import the existing annotations and apply them to the corresponding Polyspace results:

- 1 Copy the preceding code example to a text editor and save it on your machine as `annotations_description.xml`, for instance in `C:\Polyspace_workspace\annotations\`.
- 2 Rerun the analysis on `zero_div.c` by using the command:

```
polyspace-bug-finder-nodesktop -sources source_path -misra3 all ^
  -xml-annotations-description ^
  C:\Polyspace_workspace\annotations\annotations_description.xml
```

Polyspace considers the annotated results justified and hides them in the **Results List** pane.

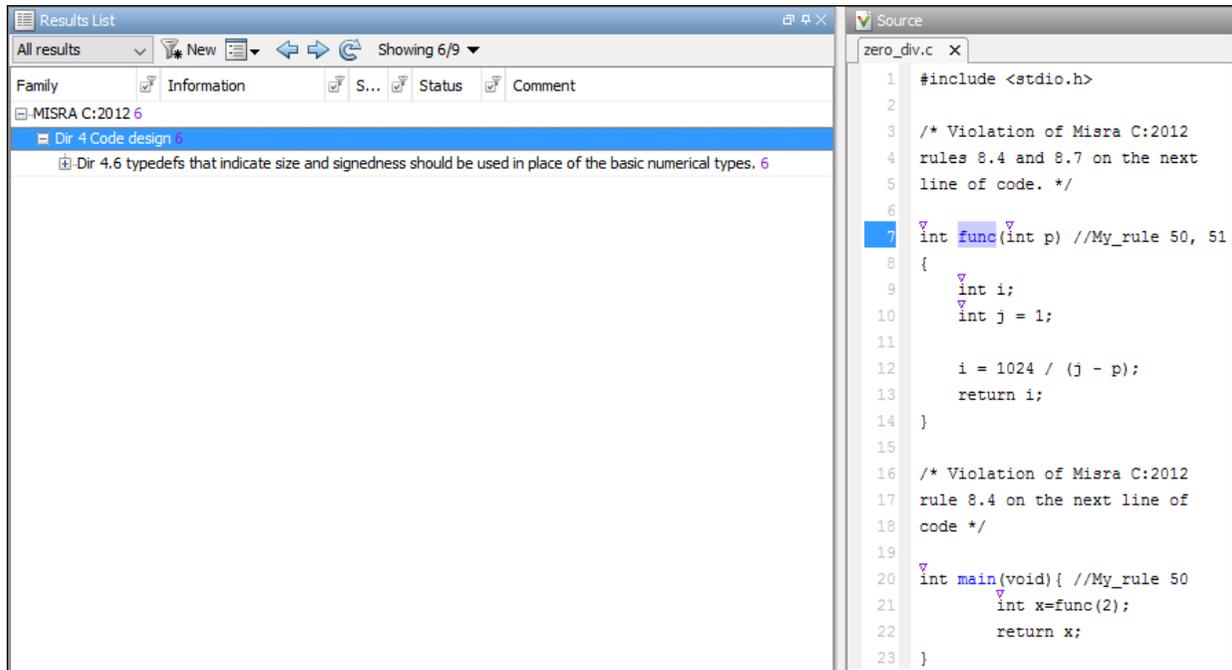

## See Also

[polyspace-bug-finder-nodesktop](#)

## Topics

“Define Custom Annotation Format”

“Annotation Description Full XML Template”

**Introduced in R2017b**

# Defects

---

## **\*this not returned in copy assignment operator**

operator= method does not return a pointer to the current object

### **Description**

**\*this not returned from copy assignment operator** occurs when assignment operators such as operator= and operator+= do not return a reference to \*this, where this is a pointer to the current object. If the operator= method does not return \*this, it means that a=b or a.operator=(b) is not returning the assignee a following the assignment.

For instance:

- The operator returns its parameter instead of a reference to the current object.

That is, the operator has a form `MyClass & operator=(const MyClass & rhs) { ... return rhs; }` instead of `MyClass & operator=(const MyClass & rhs) { ... return *this; }`.

- The operator returns by value and not reference.

That is, the operator has a form `MyClass operator=(const MyClass & rhs) { ... return *this; }` instead of `MyClass & operator=(const MyClass & rhs) { ... return *this; }`.

### **Risk**

Users typically expect object assignments to behave like assignments between built-in types and expect an assignment to return the assignee. For instance, a right-associative chained assignment `a=b=c` requires that `b=c` return the assignee `b` following the assignment. If your assignment operator behaves differently, users of your class can face unexpected consequences.

The unexpected consequences occur when the assignment is part of another statement. For instance:

- If the operator= returns its parameter instead of a reference to the current object, the assignment a=b returns b instead of a. If the operator= performs a partial assignment of data members, following an assignment a=b, the data members of a and b are different. If you or another user of your class read the data members of the return value and expect the data members of a, you might have unexpected results. For an example, see “Return Value of operator= Same as Argument” on page 3-3.
- If the operator= method returns \*this by value and not reference, a copy of \*this is returned. If you expect to modify the result of the assignment using a statement such as (a=b).modifyValue(), you modify a copy of a instead of a itself.

## Fix

Return \*this from your assignment operators.

## Examples

### Return Value of operator= Same as Argument

```
class MyClass {
public:
    MyClass(bool b, int i): m_b(b), m_i(i) {}
    const MyClass& operator=(const MyClass& obj) {
        if (&obj!=this) {
            /* Note: Only m_i is copied. m_b retains its original value. */
            m_i = obj.m_i;
        }
        return obj;
    }
    bool isOk() const { return m_b;}
    int getI() const { return m_i;}
private:
    bool m_b;
    int m_i;
};

void main() {
    MyClass r0(true, 0), r1(false, 1);
    /* Object calling isOk is r0 and the if block executes. */
    if ( (r1 = r0).isOk() ) {
        /* Do something */
    }
}
```

```

    }
}

```

In this example, the operator `operator=` returns its current argument instead of a reference to `*this`.

Therefore, in `main`, the assignment `r1 = r0` returns `r0` and not `r1`. Because the `operator=` does not copy the data member `m_b`, the value of `r0.m_b` and `r1.m_b` are different. The following unexpected behavior occurs.

What You Might Expect	What Actually Happens
<ul style="list-style-type: none"> <li>• The statement <code>(r1 = r0).isOk()</code> returns <code>r1.m_b</code> which has value <code>false</code></li> <li>• The <code>if</code> block does not execute.</li> </ul>	<ul style="list-style-type: none"> <li>• The statement <code>(r1 = r0).isOk()</code> returns <code>r0.m_b</code> which has value <code>true</code></li> <li>• The <code>if</code> block executes.</li> </ul>

One possible correction is to return `*this` from `operator=`.

```

class MyClass {
public:
    MyClass(bool b, int i): m_b(b), m_i(i) {}
    const MyClass& operator=(const MyClass& obj) {
        if (&obj!=this) {
            /* Note: Only m_i is copied. m_b retains its original value. */
            m_i = obj.m_i;
        }
        return *this;
    }
    bool isOk() const { return m_b;}
    int getI() const { return m_i;}
private:
    bool m_b;
    int m_i;
};

void main() {
    MyClass r0(true, 0), r1(false, 1);
    /* Object calling isOk is r0 and the if block executes. */
    if ( (r1 = r0).isOk() ) {
        /* Do something */
    }
}

```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** Off

**Command-Line Syntax:** RETURN\_NOT\_REF\_TO\_THIS

**Impact:** Low

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Abnormal termination of exit handler

Exit handler function interrupts the normal execution of a program

### Description

**Abnormal termination of exit handler** looks for registered exit handlers. Exit handlers are registered with specific functions such as `atexit`, (WinAPI) `_onexit`, or `at_quick_exit()`. If the exit handler calls a function that interrupts the program's expected termination sequence, Polyspace raises a defect. Some functions that can cause abnormal exits are `exit`, `abort`, `longjmp`, or (WinAPI) `_onexit`.

### Risk

If your exit handler terminates your program, you can have undefined behavior. Abnormal program termination means other exit handlers are not invoked. These additional exit handlers may do additional clean up or other required termination steps.

### Fix

In inside exit handlers, remove calls to functions that prevent the exit handler from terminating normally.

## Examples

### Exit Handler With Call to `exit`

```
#include <stdlib.h>

volatile int some_condition = 1;
void demo_exit1(void)
{
    /* ... Cleanup code ... */
    return;
}
```

```
void exitabnormalhandler(void)
{
    if (some_condition)
    {
        /* Clean up */
        exit(0);
    }
    return;
}

int demo_install_exitabnormalhandler(void)
{
    if (atexit(demo_exit1) != 0) /* demo_exit1() performs additional cleanup */
    {
        /* Handle error */
    }
    if (atexit(exitabnormalhandler) != 0)
    {
        /* Handle error */
    }
    /* ... Program code ... */
    return 0;
}
```

In this example, `demo_install_exitabnormalhandler` registers two exit handlers, `demo_exit1` and `exitabnormalhandler`. Exit handlers are invoked in the reverse order of which they are registered. When the program ends, `exitabnormalhandler` runs, then `demo_exit1`. However, `exitabnormalhandler` calls `exit` interrupting the program exit process. Having this `exit` inside an exit handler causes undefined behavior because the program is not finished cleaning up safely.

One possible correction is to let your exit handlers terminate normally. For this example, `exit` is removed from `exitabnormalhandler`, allowing the exit termination process to complete as expected.

```
#include <stdlib.h>

volatile int some_condition = 1;
void demo_exit1(void)
{
    /* ... Cleanup code ... */
    return;
}
```

```
}
void exitabnormalhandler(void)
{
    if (some_condition)
    {
        /* Clean up */
        /* Return normally */
    }
    return;
}

int demo_install_exitabnormalhandler(void)
{
    if (atexit(demo_exit1) != 0) /* demo_exit1() continues clean up */
    {
        /* Handle error */
    }
    if (atexit(exitabnormalhandler) != 0)
    {
        /* Handle error */
    }
    /* ... Program code ... */
    return 0;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** EXIT\_ABNORMAL\_HANDLER

**Impact:** Medium

**CWE ID:** 705

**CERT C ID:** ENV32-C

**CERT C++ ID:** ENV32-C

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

## Absorption of float operand

One addition or subtraction operand is absorbed by the other operand

### Description

**Absorption of float operand** occurs when one operand of an addition or subtraction operation is *always* negligibly small compared to the other operand. Therefore, the result of the operation is always equal to the value of the larger operand, making the operation redundant.

### Risk

Redundant operations waste execution cycles of your processor.

The absorption of a float operand can indicate design issues elsewhere in the code. It is possible that the developer expected a different range for one of the operands and did not expect the redundancy of the operation. However, the operand range is different from what the developer expects because of issues elsewhere in the code.

### Fix

See if the operand ranges are what you expect. To see the ranges, place your cursor on the operation.

- If the ranges are what you expect, justify why you have the redundant operation in place. For instance, the code is only partially written and you anticipate other values for one or both of the operands from future unwritten code.

If you cannot justify the redundant operation, remove it.

- If the ranges are not what you expect, in your code, trace back to see where the ranges come from. To begin your traceback, search for instances of the operand in your code. Browse through previous instances of the operand and determine where the unexpected range originates.

To determine when one operand is negligible compared to the other operand, the defect uses rules based on IEEE 754 standards. To fix the defect, instead of using the actual

rules, you can use this heuristic: the ratio of the larger to the smaller operand must be less than  $2^{p-1}$  at least for some values. Here,  $p$  is equal to 24 for 32-bit precision and 53 for 64-bit precision. To determine the precision, the defect uses your specification for Target processor type (-target).

This defect appears only if one operand is *always* negligibly smaller than the other operand. To see instances of subnormal operands or results, use the check **Subnormal Float** in Polyspace Code Prover.

## Examples

### One Addition Operand Negligibly Smaller Than The Other Operand

```
#include <stdlib.h>

float get_signal(void);
void do_operation(float);

float input_signal1(void) {
    float temp = get_signal();
    if(temp > 0. && temp < 1e-30)
        return temp;
    else {
        /* Reject value */
        exit(EXIT_FAILURE);
    }
}

float input_signal2(void) {
    float temp = get_signal();
    if(temp > 1.)
        return temp;
    else {
        /* Reject value */
        exit(EXIT_FAILURE);
    }
}

void main() {
    float signal1 = input_signal1();
```

```
    float signal2 = input_signal2();
    float super_signal = signal1 + signal2;
    do_operation(super_signal);
}
```

In this example, the defect appears on the addition because the operand `signal1` is in the range  $(0, 1e-30)$  but `signal2` is greater than 1.

One possible correction is to remove the redundant addition operation. In the following corrected code, the operand `signal2` and its associated code is also removed from consideration.

```
#include <stdlib.h>

float get_signal(void);
void do_operation(float);

float input_signal1(void) {
    float temp = get_signal();
    if(temp > 0. && temp < 1e-30)
        return temp;
    else {
        /* Reject value */
        exit(EXIT_FAILURE);
    }
}

void main() {
    float signal1 = input_signal1();
    do_operation(signal1);
}
```

Another possible correction is to see if the operand ranges are what you expect. For instance, if one of the operand range is not supposed to be negligibly small, fix the issue causing the small range. In the following corrected code, the range  $(0, 1e-2)$  is imposed on `signal2` so that it is not *always* negligibly small as compared to `signal1`.

```
#include <stdlib.h>

float get_signal(void);
void do_operation(float);
```

```
float input_signal1(void) {
    float temp = get_signal();
    if(temp > 0. && temp < 1e-2)
        return temp;
    else {
        /* Reject value */
        exit(EXIT_FAILURE);
    }
}

float input_signal2(void) {
    float temp = get_signal();
    if(temp > 1.)
        return temp;
    else {
        /* Reject value */
        exit(EXIT_FAILURE);
    }
}

void main() {
    float signal1 = input_signal1();
    float signal2 = input_signal2();
    float super_signal = signal1 + signal2;
    do_operation(super_signal);
}
```

## Result Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** FLOAT\_ABSORPTION

**Impact:** High

**CWE ID:** 189, 682, 873

**CERT C ID:** FLP00-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

# Accessing object with temporary lifetime

Read or write operations on the object are undefined behavior

## Description

**Accessing object with temporary lifetime** occurs when you attempt to read from or write to an object with temporary lifetime that is returned by a function call. In a structure or union returned by a function, and containing an array, the array members are temporary objects. The lifetime of temporary objects ends:

- When the full expression or full declarator containing the call ends, as defined in the C11 Standard.
- After the next sequence point, as defined in the C90 and C99 Standards. A sequence point is a point in the execution of a program where all previous evaluations are complete and no subsequent evaluation has started yet.

For C++ code, **Accessing object with temporary lifetime** raises a defect only when you write to an object with a temporary lifetime.

If the temporary lifetime object is returned by address, no defect is raised.

## Risk

Modifying objects with temporary lifetime is undefined behavior and can cause abnormal program termination and portability issues.

## Fix

Assign the object returned from the function call to a local variable. The content of the temporary lifetime object is copied to the variable. You can now modify it safely.

## Examples

### Modifying Temporary Lifetime Object Returned by Function Call

```
#include <stdio.h>
#include <assert.h>
#include <stdlib.h>
#include <string.h>

#define SIZE6 6

struct S_Array
{
    int t;
    int a[SIZE6];
};

struct S_Array func_temp(void);

/* func_temp() returns a struct value containing
 * an array with a temporary lifetime.
 */
int func(void) {

    /*Writing to temporary lifetime object is
    undefined behavior
    */
    return ++(func_temp()).a[0];
}

void main(void) {
    (void)func();
}
```

In this example, `func_temp()` returns by value a structure with an array member `a`. This member has temporary lifetime. Incrementing it is undefined behavior.

One possible correction is to assign the return of the call to `func_temp()` to a local variable. The content of the temporary object `a` is copied to the variable, which you can safely increment.

```
#include <stdio.h>
#include <assert.h>
#include <stdlib.h>
#include <string.h>

#define SIZE6 6

struct S_Array
{
    int t;
    int a[SIZE6];
};

struct S_Array func_temp(void);

int func(void) {
    /* Assign object returned by function call to
    *local variable
    */
    struct S_Array s = func_temp();

    /* Local variable can safely be
    *incremented
    */
    ++(s.a[0]);
    return s.a[0];
}

void main(void) {
    (void)func();
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** TEMP\_OBJECT\_ACCESS

**Impact:** Low

**CWE ID:** 825

**CERT C ID:** EXP35-C

**CERT C++ ID:** EXP35-C, EXP54-CPP

## **See Also**

### **Topics**

Large pass-by-value argument

Misuse of structure with flexible array member

Write without a further read

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

# Alignment changed after memory reallocation

Memory reallocation changes the originally stricter alignment of an object

## Description

**Alignment changed after memory reallocation** occurs when you use `realloc()` to modify the size of objects with strict memory alignment requirements.

## Risk

The pointer returned by `realloc()` can be suitably assigned to objects with less strict alignment requirements. A misaligned memory allocation can lead to buffer underflow or overflow, an illegally dereferenced pointer, or access to arbitrary memory locations. In processors that support misaligned memory, the allocation impacts the performance of the system.

## Fix

To reallocate memory:

- 1 Resize the memory block.
  - In Windows, use `_aligned_realloc()` with the alignment argument used in `_aligned_malloc()` to allocate the original memory block.
  - In UNIX/Linux, use the same function with the same alignment argument used to allocate the original memory block.
- 2 Copy the original content to the new memory block.
- 3 Free the original memory block.

---

**Note** This fix has implementation-defined behavior. The implementation might not support the requested memory alignment and can have additional constraints for the size of the new memory.

---

## Examples

### Memory Reallocated Without Preserving the Original Alignment

```
#include <stdio.h>
#include <stdlib.h>

#define SIZE1024 1024

void func(void)
{
    size_t resize = SIZE1024;
    size_t alignment = 1 << 12; /* 4096 bytes alignment */
    int *ptr = NULL;
    int *ptr1;

    /* Allocate memory with 4096 bytes alignment */

    if (posix_memalign((void **)&ptr, alignment, sizeof(int)) != 0)
    {
        /* Handle error */
    }

    /*Reallocate memory without using the original alignment.
    ptr1 may not be 4096 bytes aligned. */

    ptr1 = (int *)realloc(ptr, sizeof(int) * resize);

    if (ptr1 == NULL)
    {
        /* Handle error */
    }

    /* Processing using ptr1 */

    /* Free before exit */
    free(ptr1);
}
```

In this example, the allocated memory is 4096-bytes aligned. `realloc()` then resizes the allocated memory. The new pointer `ptr1` might not be 4096-bytes aligned.

When you reallocate the memory, use `posix_memalign()` and pass the alignment argument that you used to allocate the original memory.

```
#include <stdio.h>
#include <stdlib.h>

#define SIZE1024 1024

void func(void)
{
    size_t resize = SIZE1024;
    size_t alignment = 1 << 12; /* 4096 bytes alignment */
    int *ptr = NULL;

    /* Allocate memory with 4096 bytes alignment */
    if (posix_memalign((void **)&ptr, alignment, sizeof(int)) != 0)
    {
        /* Handle error */
    }

    /* Reallocate memory using the original alignment. */
    if (posix_memalign((void **)&ptr, alignment, sizeof(int) * resize) != 0)
    {
        /* Handle error */
        free(ptr);
        ptr = NULL;
    }

    /* Processing using ptr */

    /* Free before exit */
    free(ptr);
}
```

## Result Information

**Group:** Dynamic memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** ALIGNMENT\_CHANGE

**Impact:** Low

**CERT C ID:** MEM36-C

**CERT C++ ID:** MEM36-C

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

# Alternating input and output from a stream without flush or positioning call

Undefined behavior for input or output stream operations

## Description

**Alternating input and output from a stream without flush or positioning call** occurs when:

- You do not perform a flush or function positioning call between an output operation and a following input operation on a file stream in update mode.
- You do not perform a function positioning call between an input operation and a following output operation on a file stream in update mode.

## Risk

Alternating input and output operations on a stream without an intervening flush or positioning call is undefined behavior.

## Fix

Call `fflush()` or a file positioning function such as `fseek()` or `fsetpos()` between output and input operations on an update stream.

Call a file positioning function between input and output operations on an update stream.

## Examples

### Read After Write Without Intervening Flush

```
#include <stdio.h>
#define SIZE20 20
```

```
void initialize_data(char* data, size_t s) {};  
const char *temp_filename = "/tmp/demo.txt";  
  
void func()  
{  
    char data[SIZE20];  
    char append_data[SIZE20];  
    FILE *file;  
  
    file = fopen(temp_filename, "a+");  
    if (file == NULL)  
    {  
        /* Handle error. */;  
    }  
  
    initialize_data(append_data, SIZE20);  
  
    if (fwrite(append_data, 1, SIZE20, file) != SIZE20)  
    {  
        (void)fclose(file);  
        /* Handle error. */;  
    }  
    /* Read operation after write without  
    intervening flush. */  
    if (fread(data, 1, SIZE20, file) < SIZE20)  
    {  
        (void)fclose(file);  
        /* Handle error. */;  
    }  
  
    if (fclose(file) == EOF)  
    {  
        /* Handle error. */;  
    }  
}
```

In this example, the file `demo.txt` is opened for reading and appending. After the call to `fwrite()`, a call to `fread()` without an intervening flush operation is undefined behavior.

After writing data to the file, before calling `fread()`, perform a flush call.

```

#include <stdio.h>
#define SIZE20 20

void initialize_data(char* data, size_t s) {};
const char *temp_filename = "/tmp/demo.txt";

void func()
{
    char data[SIZE20];
    char append_data[SIZE20];
    FILE *file;

    file = fopen(temp_filename, "a+");
    if (file == NULL)
    {
        /* Handle error. */;
    }

    initialize_data(append_data, SIZE20);

    if (fwrite(append_data, 1, SIZE20, file) != SIZE20)
    {
        (void)fclose(file);
        /* Handle error. */;
    }
    /* Buffer flush after write and before read */
    if (fflush(file) != 0)
    {
        (void)fclose(file);
        /* Handle error. */;
    }
    if (fread(data, 1, SIZE20, file) < SIZE20)
    {
        (void)fclose(file);
        /* Handle error. */;
    }

    if (fclose(file) == EOF)
    {
        /* Handle error. */;
    }
}

```

## **Result Information**

**Group:**Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** IO\_INTERLEAVING

**Impact:** Low

**CERT C ID:** FIO39-C

**CERT C++ ID:** FIO39-C

**ISO/IEC TS 17961 ID:** ioileave

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

# Arithmetic operation with NULL pointer

Arithmetic operation performed on NULL pointer

## Description

**Arithmetic operation with NULL pointer** occurs when an arithmetic operation involves a pointer whose value is NULL.

## Examples

### Arithmetic Operation with NULL Pointer Error

```
#include<stdlib.h>

int Check_Next_Value(int *loc, int val)
{
    int *ptr = loc, found = 0;

    if (ptr==NULL)
    {
        ptr++;
        /* Defect: NULL pointer shifted */

        if (*ptr==val) found=1;
    }

    return(found);
}
```

When `ptr` is a NULL pointer, the code enters the `if` statement body. Therefore, a NULL pointer is shifted in the statement `ptr++`.

One possible correction is to perform the arithmetic operation when `ptr` is not NULL.

```
#include<stdlib.h>
```

```
int Check_Next_Value(int *loc, int val)
{
    int *ptr = loc, found = 0;

    /* Fix: Perform operation when ptr is not NULL */
    if (ptr!=NULL)
    {
        ptr++;

        if (*ptr==val) found=1;
    }

    return(found);
}
```

## Check Information

**Group:** Static memory

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** NULL\_PTR\_ARITH

**Impact:** Low

**CERT C ID:** EXP34-C

**CERT C++ ID:** EXP34-C

**ISO/IEC TS 17961 ID:** nullref

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Null pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2013b

# Array access out of bounds

Array index outside bounds during array access

## Description

**Array access out of bounds** occurs when an array index falls outside the range `[0...array_size-1]` during array access.

## Examples

### Array Access Out of Bounds Error

```
#include <stdio.h>

void fibonacci(void)
{
    int i;
    int fib[10];

    for (i = 0; i < 10; i++)
    {
        if (i < 2)
            fib[i] = 1;
        else
            fib[i] = fib[i-1] + fib[i-2];
    }

    printf("The 10-th Fibonacci number is %i .\n", fib[i]);
    /* Defect: Value of i is greater than allowed value of 9 */
}
```

The array `fib` is assigned a size of 10. An array index for `fib` has allowed values of `[0,1,2,...,9]`. The variable `i` has a value 10 when it comes out of the `for`-loop. Therefore, the `printf` statement attempts to access `fib[10]` through `i`.

One possible correction is to print `fib[i-1]` instead of `fib[i]` after the `for`-loop.

```
#include <stdio.h>

void fibonacci(void)
{
    int i;
    int fib[10];

    for (i = 0; i < 10; i++)
    {
        if (i < 2)
            fib[i] = 1;
        else
            fib[i] = fib[i-1] + fib[i-2];
    }

    /* Fix: Print fib[9] instead of fib[10] */
    printf("The 10-th Fibonacci number is %i .\n", fib[i-1]);
}
```

The printf statement accesses fib[9] instead of fib[10].

## Check Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** OUT\_BOUND\_ARRAY

**Impact:** High

**CWE ID:** 119, 131, 466

**CERT C ID:** API02-C, ARR00-C, ARR30-C, ARR38-C, FIO37-C, MSC15-C, STR31-C

**CERT C++ ID:** ARR30-C, ARR38-C, CTR50-CPP, FIO37-C, STR31-C, STR50-CPP, STR53-CPP

**ISO/IEC TS 17961 ID:** invptr

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Pointer access out of bounds

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Array access with tainted index

Array index from unsecure source possibly outside array bounds

### Description

**Array access with tainted index** detects reading or writing to an array by using a tainted index that has not been validated.

### Risk

The index might be outside the valid array range. If the tainted index is outside the array range, it can cause:

- Buffer underflow/underwrite — writing to memory before the beginning of the buffer.
- Buffer overflow — writing to memory after the end of a buffer.
- Over-reading a buffer — accessing memory after the end of the targeted buffer.
- Under-reading a buffer, or accessing memory before the beginning of the targeted buffer.

An attacker can use an invalid read or write operation create to problems in your program.

### Fix

Before using the index to access the array, validate the index value to make sure that it is inside the array range.

## Examples

### Use Index to Return Buffer Value

```
#define SIZE100 100
extern int tab[SIZE100];
```

```
int taintedarrayindex(int num) {
    return tab[num];
}
```

In this example, the index `num` accesses the array `tab`. The function does not check to see if `num` is inside the range of `tab`.

One possible correction is to check that `num` is in range before using it.

```
#define SIZE100 100
extern int tab[SIZE100];

int taintedarrayindex(int num) {
    if (num >= 0 && num < SIZE100) {
        return tab[num];
    } else {
        return -9999;
    }
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_ARRAY\_INDEX

**Impact:** Medium

**CWE ID:** 121, 124, 125, 129

**CERT C ID:** INT04-C, ARR30-C, API00-C, API02-C

**CERT C++ ID:** ARR30-C, CTR50-CPP, STR53-CPP

**ISO/IEC TS 17961 ID:** invptr

## See Also

Loop bounded with tainted value | Pointer dereference with tainted offset | Tainted size of variable length array

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Assertion

Failed assertion statement

## Description

**Assertion** occurs when you use an `assert`, and the asserted expression is or could be false.

---

**Note** Polyspace does not flag `assert(0)` as an assertion defect because these statements are commonly used to disable certain sections of code.

---

## Examples

### Check Assertion on Unsigned Integer

```
#include <assert.h>

void asserting_x(unsigned int theta) {
    theta += 5;
    assert(theta < 0);
}
```

In this example, the `assert` function checks if the input variable, `theta`, is less than or equal to zero. The assertion fails because `theta` is an unsigned integer, so the value at the beginning of the function is at least zero. The `+=` statement increases this positive value by five. Therefore, the range of `theta` is `[5..MAX_INT]`. `theta` is always greater than zero.

One possible correction is to change the assertion expression. By changing the *less-than-or-equal-to* sign to a *greater-than-or-equal-to* sign, the assertion does not fail.

```
#include <assert.h>

void asserting_x(unsigned int theta) {
```

```
    theta += 5;
    assert(theta > 0);
}
```

One possible correction is to fix the code related to the assertion expression. If the assertion expression is true, fix your code so the assertion passes.

```
#include <assert.h>
#include <stdlib.h>

void asserting_x(int theta) {
    theta = -abs(theta);
    assert(theta < 0);
}
```

## Asserting Zero

```
#include <assert.h>

#define FLAG 0

int main(void){
    int i_test_z = 0;
    float f_test_z = (float)i_test_z;

    assert(i_test_z);
    assert(f_test_z);
    assert(FLAG);

    return 0;
}
```

In this example, Polyspace does not flag `assert(FLAG)` as a violation because a macro defines `FLAG` as `0`. The Polyspace Bug Finder assertion checker does not flag assertions with a constant zero parameter, `assert(0)`. These types of assertions are commonly used as dynamic checks during runtime. By inserting `assert(0)`, you indicate that the program must not reach this statement during run time, otherwise the program crashes.

However, the assertion checker does flag failed assertions caused by a variable value equal to zero, as seen in the example with `assert(i_test_z)` and `assert(f_test_z)`.

## Check Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** ASSERT

**Impact:** High

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Atomic load and store sequence not atomic

Variable accessible between load and store operations

### Description

**Atomic load and store sequence not atomic** occurs when you use these functions to load, and then store an atomic variable.

- C functions:
  - `atomic_load()`
  - `atomic_load_explicit()`
  - `atomic_store()`
  - `atomic_store_explicit()`
- C++ functions:
  - `std::atomic_load()`
  - `std::atomic_load_explicit()`
  - `std::atomic_store()`
  - `std::atomic_store_explicit()`
  - `std::atomic::load()`
  - `std::atomic::store()`

A thread cannot interrupt an atomic load or an atomic store operation on a variable, but a thread can interrupt a store, and then load sequence.

### Risk

A thread can modify a variable between the load and store operations, resulting in a data race condition.

## Fix

To read, modify, and store a variable atomically, use a compound assignment operator such as `+=`, `atomic_compare_exchange()` or `atomic_fetch_*`-family functions.

## Examples

### Loading Then Storing an Atomic Variable

```
#include <stdatomic.h>
#include <stdbool.h>

static atomic_bool flag = ATOMIC_VAR_INIT(false);

void init_flag(void)
{
    atomic_init(&flag, false);
}

void toggle_flag(void)
{
    bool temp_flag = atomic_load(&flag);
    temp_flag = !temp_flag;
    atomic_store(&flag, temp_flag);
}

bool get_flag(void)
{
    return atomic_load(&flag);
}
```

In this example, variable `flag` of type `atomic_bool` is referenced twice inside the `toggle_flag()` function. The function loads the variable, negates its value, then stores the new value back to the variable. If two threads call `toggle_flag()`, the second thread can access `flag` between the load and store operations of the first thread. `flag` can end up in an incorrect state.

One possible correction is to use a compound assignment operator to toggle the value of `flag`. The C standard defines the operation by using `^=` as atomic.

```
#include <stdatomic.h>
#include <stdbool.h>

static atomic_bool flag = ATOMIC_VAR_INIT(false);

void toggle_flag(void)
{
    flag ^= 1;
}

bool get_flag(void)
{
    return flag;
}
```

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** ATOMIC\_VAR\_SEQUENCE\_NOT\_ATOMIC

**Impact:** Medium

**CERT C ID:** CON40-C

**CERT C++ ID:** CON40-C

## See Also

Atomic variable accessed twice in an expression | Data race | Data race including atomic operations

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Atomic variable accessed twice in an expression

Variable can be modified between accesses

## Description

**Atomic variable accessed twice in an expression** occurs when C atomic types or C++ `std::atomic` class variables appear twice in an expression and there are:

- Two atomic read operations on the variable.
- An atomic read and a distinct atomic write operation on the variable.

The C standard defines certain operations on atomic variables that are thread safe and do not cause data race conditions. Unlike individual operations, a pair of operations on the same atomic variable in an expression is not thread safe.

## Risk

A thread can modify the atomic variable between the pair of atomic operations, which can result in a data race condition.

## Fix

Do not reference an atomic variable twice in the same expression.

## Examples

### Referencing Atomic Variable Twice in an Expression

```
#include <stdatomic.h>

atomic_int n = ATOMIC_VAR_INIT(0);
```

```
int compute_sum(void)
{
    return n * (n + 1) / 2;
}
```

In this example, the global variable `n` is referenced twice in the return statement of `compute_sum()`. The value of `n` can change between the two distinct read operations. `compute_sum()` can return an incorrect value.

One possible correction is to pass the variable as a function argument `n`. The variable is copied to memory and the read operations on the copy guarantee that `compute_sum()` returns a correct result. If you pass a variable of type `int` instead of type `atomic_int`, the correction is still valid.

```
#include <stdatomic.h>

int compute_sum(atomic_int n)
{
    return n * (n + 1) / 2;
}
```

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** ATOMIC\_VAR\_ACCESS\_TWICE

**Impact:** Medium

**CERT C ID:** CON40-C

**CERT C++ ID:** CON40-C

## See Also

Atomic load and store sequence not atomic | Data race | Data race including atomic operations

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

## Bad file access mode or status

Access mode argument of function in `fopen` or `open` group is invalid

### Description

**Bad file access mode or status** occurs when you use functions in the `fopen` or `open` group with invalid or incompatible file access modes, file creation flags, or file status flags as arguments. For instance, for the `open` function, examples of valid:

- Access modes include `O_RDONLY`, `O_WRONLY`, and `O_RDWR`
- File creation flags include `O_CREAT`, `O_EXCL`, `O_NOCTTY`, and `O_TRUNC`.
- File status flags include `O_APPEND`, `O_ASYNC`, `O_CLOEXEC`, `O_DIRECT`, `O_DIRECTORY`, `O_LARGEFILE`, `O_NOATIME`, `O_NOFOLLOW`, `O_NONBLOCK`, `O_NDELAY`, `O_SHLOCK`, `O_EXLOCK`, `O_FSYNC`, `O_SYNC` and so on.

The defect can occur in the following situations.

Situation	Risk	Fix
<p>You pass an empty or invalid access mode to the <code>fopen</code> function.</p> <p>According to the ANSI C standard, the valid access modes for <code>fopen</code> are:</p> <ul style="list-style-type: none"> <li>• <code>r,r+</code></li> <li>• <code>w,w+</code></li> <li>• <code>a,a+</code></li> <li>• <code>rb,wb,ab</code></li> <li>• <code>r+b,w+b,a+b</code></li> <li>• <code>rb+,wb+,ab+</code></li> </ul>	<p><code>fopen</code> has undefined behavior for invalid access modes.</p> <p>Some implementations allow extension of the access mode such as:</p> <ul style="list-style-type: none"> <li>• GNU: <code>rb+cmxe,ccs=utf</code></li> <li>• Visual C++: <code>a+t</code>, where <code>t</code> specifies a text mode.</li> </ul> <p>However, your access mode string must begin with one of the valid sequences.</p>	<p>Pass a valid access mode to <code>fopen</code>.</p>

Situation	Risk	Fix
You pass the status flag <code>O_APPEND</code> to the <code>open</code> function without combining it with either <code>O_WRONLY</code> or <code>O_RDWR</code> .	<p><code>O_APPEND</code> indicates that you intend to add new content at the end of a file. However, without <code>O_WRONLY</code> or <code>O_RDWR</code>, you cannot write to the file.</p> <p>The <code>open</code> function does not return -1 for this logical error.</p>	Pass either <code>O_APPEND   O_WRONLY</code> or <code>O_APPEND   O_RDWR</code> as access mode.
You pass the status flags <code>O_APPEND</code> and <code>O_TRUNC</code> together to the <code>open</code> function.	<p><code>O_APPEND</code> indicates that you intend to add new content at the end of a file. However, <code>O_TRUNC</code> indicates that you intend to truncate the file to zero. Therefore, the two modes cannot operate together.</p> <p>The <code>open</code> function does not return -1 for this logical error.</p>	Depending on what you intend to do, pass one of the two modes.
You pass the status flag <code>O_ASYNC</code> to the <code>open</code> function.	On certain implementations, the mode <code>O_ASYNC</code> does not enable signal-driven I/O operations.	Use the <code>fcntl(pathname, F_SETFL, O_ASYNC)</code> ; instead.

## Examples

### Invalid Access Mode with `fopen`

```
#include <stdio.h>

void func(void) {
    FILE *file = fopen("data.txt", "rw");
    if(file!=NULL) {
        fputs("new data",file);
    }
}
```

```
        fclose(file);
    }
}
```

In this example, the access mode `rw` is invalid. Because `r` indicates that you open the file for reading and `w` indicates that you create a new file for writing, the two access modes are incompatible.

One possible correction is to use the access mode corresponding to what you intend to do.

```
#include <stdio.h>

void func(void) {
    FILE *file = fopen("data.txt", "w");
    if(file!=NULL) {
        fputs("new data",file);
        fclose(file);
    }
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** `BAD_FILE_ACCESS_MODE_STATUS`

**Impact:** Medium

**CWE ID:** 628, 686

**CERT C ID:** EXP37-C, FIO11-C

**CERT C++ ID:** EXP37-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Bad order of dropping privileges

Dropped higher elevated privileges before dropping lower elevated privileges

### Description

**Bad order of dropping privileges** checks the order of privilege drops. If you drop higher elevated privileges before dropping lower elevated privileges, Polyspace raises a defect. For example dropping elevated primary group privileges before dropping elevated ancillary group privileges.

### Risk

If you drop privileges in the wrong order, you can potentially drop higher privileges that you need to drop lower privileges. The incorrect order can mean, privileges are not dropped, compromising the security of your program.

### Fix

Respect this order of dropping elevated privileges:

- Drop (elevated) ancillary group privileges, then drop (elevated) primary group privileges.
- Drop (elevated) primary group privileges, then drop (elevated) user privileges.

## Examples

### Dropping User Privileges First

```
#define _BSD_SOURCE
#include <sys/types.h>
#include <unistd.h>
#include <grp.h>
#include <stdlib.h>
#define fatal_error() abort()
```

```
static void sanitize_privilege_drop_check(uid_t olduid, gid_t oldgid)
{
    if (seteuid(olduid) != -1)
    {
        /* Privileges can be restored, handle error */
        fatal_error();
    }
    if (setegid(oldgid) != -1)
    {
        /* Privileges can be restored, handle error */
        fatal_error();
    }
}

void badprivilegedroporder(void) {
    uid_t
        newuid = getuid(),
        olduid = geteuid();
    gid_t
        newgid = getgid(),
        oldgid = getegid();

    if (setuid(newuid) == -1) {
        /* handle error condition */
        fatal_error();
    }
    if (setgid(newgid) == -1) {
        /* handle error condition */
        fatal_error();
    }
    if (olduid == 0) {
        /* drop ancillary groups IDs only possible for root */
        if (setgroups(1, &newgid) == -1) {
            /* handle error condition */
            fatal_error();
        }
    }

    sanitize_privilege_drop_check(olduid, oldgid);
}
```

In this example, there are two privilege drops made in the incorrect order. `setgid` attempts to drop group privileges. However, `setgid` requires the user privileges, which were dropped previously using `setuid`, to perform this function. After dropping group

privileges, this function attempts to drop ancillary groups privileges by using `setgroups`. This task requires the higher primary group privileges that were dropped with `setgid`. At the end of this function, it is possible to regain group privileges because the order of dropping privileges was incorrect.

One possible correction is to drop the lowest level privileges first. In this correction, ancillary group privileges are dropped, then primary group privileges are dropped, and finally user privileges are dropped.

```
#define _BSD_SOURCE
#include <sys/types.h>
#include <unistd.h>
#include <grp.h>
#include <stdlib.h>
#define fatal_error() abort()

static void sanitize_privilege_drop_check(uid_t olduid, gid_t oldgid)
{
    if (seteuid(olduid) != -1)
    {
        /* Privileges can be restored, handle error */
        fatal_error();
    }
    if (setegid(oldgid) != -1)
    {
        /* Privileges can be restored, handle error */
        fatal_error();
    }
}

void badprivilegedroporder(void) {
    uid_t
        newuid = getuid(),
        olduid = seteuid();
    gid_t
        newgid = getgid(),
        oldgid = getegid();

    if (olduid == 0) {
        /* drop ancillary groups IDs only possible for root */
        if (setgroups(1, &newgid) == -1) {
            /* handle error condition */
            fatal_error();
        }
    }
}
```

```
    }  
    if (setgid(getgid()) == -1) {  
        /* handle error condition */  
        fatal_error();  
    }  
    if (setuid(getuid()) == -1) {  
        /* handle error condition */  
        fatal_error();  
    }  
  
    sanitize_privilege_drop_check(olduid, oldgid);  
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BAD\_PRIVILEGE\_DROP\_ORDER

**Impact:** High

**CWE ID:** 250, 696

**CERT C ID:** POS36-C

**CERT C++ ID:** POS36-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

## Base class assignment operator not called

Copy assignment operator does not call copy assignment operators of base subobjects

### Description

**Base class assignment operator not called** occurs when a derived class copy assignment operator does not call the copy assignment operator of its base class.

### Risk

If this defect occurs, unless you are initializing the base class data members explicitly in the derived class assignment operator, the operator initializes the members implicitly by using the default constructor of the base class. Therefore, it is possible that the base class data members do not get assigned the right values.

If users of your class expect your assignment operator to perform a complete assignment between two objects, they can face unintended consequences.

### Fix

Call the base class copy assignment operator from the derived class copy assignment operator.

Even if the base class data members are not `private`, and you explicitly initialize the base class data members in the derived class copy assignment operator, replace this explicit initialization with a call to the base class copy assignment operator. Otherwise, determine why you retain the explicit initialization.

## Examples

### Base Class Copy Assignment Operator Not Called

```
class Base0 {  
public:
```

```
    Base0();
    virtual ~Base0();
    Base0& operator=(const Base0&);
private:
    int _i;
};

class Base1 {
public:
    Base1();
    virtual ~Base1();
    Base1& operator=(const Base1&);
private:
    int _i;
};

class Derived: public Base0, Base1 {
public:
    Derived();
    ~Derived();
    Derived& operator=(const Derived& d) {
        if (&d == this) return *this;
        Base0::operator=(d);
        _j = d._j;
        return *this;
    }
private:
    int _j;
};
```

In this example, the class `Derived` is derived from two classes `Base0` and `Base1`. In the copy assignment operator of `Derived`, only the copy assignment operator of `Base0` is called. The copy assignment operator of `Base1` is not called.

The defect appears on the copy assignment operator of the derived class. Following are some tips for navigating in the source code:

- To find the derived class definition, right-click the derived class name and select **Go To Definition**.
- To find the base class definition, first navigate to the derived class definition. In the derived class definition, right-click the base class name and select **Go To Definition**.

- To find the definition of the base class copy assignment operator, first navigate to the base class definition. In the base class definition, right-click the operator name and select **Go To Definition**.

If you want your copy assignment operator to perform a complete assignment, one possible correction is to call the copy assignment operator of class `Base1`.

```
class Base0 {
public:
    Base0();
    virtual ~Base0();
    Base0& operator=(const Base0&);
private:
    int _i;
};

class Base1 {
public:
    Base1();
    virtual ~Base1();
    Base1& operator=(const Base1&);
private:
    int _i;
};

class Derived: public Base0, Base1 {
public:
    Derived();
    ~Derived();
    Derived& operator=(const Derived& d) {
        if (&d == this) return *this;
        Base0::operator=(d);
        Base1::operator=(d);
        _j = d._j;
        return *this;
    }
private:
    int _j;
};
```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** On

**Command-Line Syntax:** MISSING\_BASE\_ASSIGN\_OP\_CALL

**Impact:** High

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Copy constructor not called in initialization list

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Base class destructor not virtual

Class cannot behave polymorphically for deletion of derived class objects

### Description

**Base class destructor not virtual** occurs when a class has `virtual` functions but not a `virtual` destructor.

### Risk

The presence of `virtual` functions indicates that the class is intended for use as a base class. However, if the class does not have a `virtual` destructor, it cannot behave polymorphically for deletion of derived class objects.

If a pointer to this class refers to a derived class object, and you use the pointer to delete the object, only the base class destructor is called. Additional resources allocated in the derived class are not released and can cause a resource leak.

### Fix

One possible fix is to always use a `virtual` destructor in a class that contains `virtual` functions.

## Examples

### Base Class Destructor Not Virtual

```
class Base {
public:
    Base(): _b(0) {};
    virtual void update() {_b += 1;};
private:
    int _b;
};
```

```

class Derived: public Base {
public:
    Derived(): _d(0) {};
    ~Derived() {_d = 0;};
    virtual void update() {_d += 1;};
private:
    int _d;
};

```

In this example, the class `Base` does not have a `virtual` destructor. Therefore, if a `Base*` pointer points to a `Derived` object that is allocated memory dynamically, and the `delete` operation is performed on that `Base*` pointer, the `Base` destructor is called. The memory allocated for the additional member `_d` is not released.

The defect appears on the base class definition. Following are some tips for navigating in the source code:

- To find classes derived from the base class, right-click the base class name and select **Search For All References**. Browse through each search result to find derived class definitions.
- To find if you are using a pointer or reference to a base class to point to a derived class object, right-click the base class name and select **Search For All References**. Browse through search results that start with `Base*` or `Base&` to locate pointers or references to the base class. You can then see if you are using a pointer or reference to point to a derived class object.

One possible correction is to declare a `virtual` destructor for the class `Base`.

```

class Base {
public:
    Base(): _b(0) {};
    virtual ~Base() {_b = 0;};
    virtual void update() {_b += 1;};
private:
    int _b;
};

class Derived: public Base {
public:
    Derived(): _d(0) {};
    ~Derived() {_d = 0;};
    virtual void update() {_d += 1;};
};

```

```
        private:  
            int _d;  
};
```

### Result Information

**Group:** Object oriented

**Language:** C++

**Default:** On

**Command-Line Syntax:** DTOR\_NOT\_VIRTUAL

**Impact:** Medium

**CERT C++ ID:** OOP52-CPP

### See Also

Find defects (-checkers)

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### External Websites

CERT C++ OOP52-CPP

**Introduced in R2015b**

# Bitwise and arithmetic operation on the same data

Statement with mixed bitwise and arithmetic operations

## Description

**Bitwise and arithmetic operation on a same data** detects statements with bitwise and arithmetic operations on the same variable or expression.

## Risk

Mixed bitwise and arithmetic operations *do* compile. However, the size of integer types affects the result of these mixed operations. Mixed operations also reduce readability and maintainability.

## Fix

Separate bitwise and arithmetic operations, or use only one type of operation per statement.

## Examples

### Shift and Addition

```
unsigned int bitwisearithmix()
{
    unsigned int var = 50;
    var += (var << 2) + 1;
    return var;
}
```

This example shows bitwise and arithmetic operations on the variable `var`. `var` is shifted by two (bitwise), then increased by 1 and added to itself (arithmetic).

You can reduce this expression to arithmetic-only operations: `var + (var << 2)` is equivalent to `var * 5`.

```
unsigned int bitwisearithmix()
{
    unsigned int var = 50;
    var = var * 5 + 1;
    return var;
}
```

## Result Information

**Group:** Good Practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BITWISE\_ARITH\_MIX

**Impact:** Low

**CWE ID:** 710

**CERT C ID:** INT14-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

# Bitwise operation on negative value

Undefined behavior for bitwise operations on negative values

## Description

**Bitwise operation on negative value** detects bitwise operators (>>, ^, |, ~, but, not, &) used on signed integer variables with negative values.

## Risk

If the value of the signed integer is negative, bitwise operation results can be unexpected because:

- Bitwise operations on negative values are compiler-specific.
- Unexpected calculations can lead to additional vulnerabilities, such as buffer overflow.

## Fix

When performing bitwise operations, use unsigned integers to avoid unexpected results.

## Examples

### Right-Shift of Negative Integer

```
#include <stdio.h>
#include <stdarg.h>

static void demo_sprintf(const char *format, ...)
{
    int rc;
    va_list ap;
    char buf[sizeof("256")];

    va_start(ap, format);
    rc = vsprintf(buf, format, ap);
```

```
    if (rc == -1 || rc >= sizeof(buf)) {
        /* Handle error */
    }
    va_end(ap);
}

void bug_bitwiseneg()
{
    int stringify = 0x80000000;
    demo_sprintf("%u", stringify >> 24);
}
```

In this example, the statement `demo_sprintf("%u", stringify >> 24)` stops the program unexpectedly. You expect the result of `stringify >> 24` to be `0x80`. However, the actual result is `0xffffffff80` because `stringify` is signed and negative. The sign bit is also shifted.

By adding the `unsigned` keyword, `stringify` is not negative and the right-shift operation gives the expected result of `0x80`.

```
#include <stdio.h>
#include <stdarg.h>

static void demo_sprintf(const char *format, ...)
{
    int rc;
    va_list ap;
    char buf[sizeof("256")];

    va_start(ap, format);
    rc = vsprintf(buf, format, ap);
    if (rc == -1 || rc >= sizeof(buf)) {
        /* Handle error */
    }
    va_end(ap);
}

void corrected_bitwiseneg()
{
    unsigned int stringify = 0x80000000;
    demo_sprintf("%u", stringify >> 24);
}
```

## Result Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BITWISE\_NEG

**Impact:** Medium

**CWE ID:** 682, 758

**CERT C ID:** INT13-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

## Blocking operation while holding lock

Task performs lengthy operation while holding a lock

### Description

**Blocking operation while holding lock** occurs when a task (thread) performs a potentially lengthy operation while holding a lock.

The checker considers calls to these functions as potentially lengthy:

- Functions that access a network such as `recv`
- System call functions such as `fork`, `pipe` and `system`
- Functions for I/O operations such as `getchar` and `scanf`
- File handling functions such as `fopen`, `remove` and `lstat`
- Directory manipulation functions such as `mkdir` and `rmdir`

The checker automatically detects certain primitives that hold and release a lock, for instance, `pthread_mutex_lock` and `pthread_mutex_unlock`. For the full list of primitives that are automatically detected, see “Auto-Detection of Thread Creation and Critical Section in Polyspace”.

### Risk

If a thread performs a lengthy operation when holding a lock, other threads that use the lock have to wait for the lock to be available. As a result, system performance can slow down or deadlocks can occur.

### Fix

Perform the blocking operation before holding the lock or after releasing the lock.

Some functions detected by this checker can be called in a way that does not make them potentially lengthy. For instance, the function `recv` can be called with the parameter `O_NONBLOCK` which causes the call to fail if no message is available. When called with this parameter, `recv` does not wait for a message to become available.

## Examples

### Network I/O Operations with recv While Holding Lock

```
#include <pthread.h>
#include <sys/socket.h>

pthread_mutexattr_t attr;
pthread_mutex_t mutex;

void thread_foo(void *ptr) {
    unsigned int num;
    int result;
    int sock;

    /* sock is a connected TCP socket */

    if ((result = pthread_mutex_lock(&mutex)) != 0) {
        /* Handle Error */
    }

    if ((result = recv(sock, (void *)&num, sizeof(unsigned int), 0)) < 0) {
        /* Handle Error */
    }

    /* ... */

    if ((result = pthread_mutex_unlock(&mutex)) != 0) {
        /* Handle Error */
    }
}

int main() {
    pthread_t thread;
    int result;

    if ((result = pthread_mutexattr_settype(
        &attr, PTHREAD_MUTEX_ERRORCHECK)) != 0) {
        /* Handle Error */
    }

    if ((result = pthread_mutex_init(&mutex, &attr)) != 0) {
        /* Handle Error */
    }
}
```

```
    }

    if (pthread_create(&thread, NULL, (void*)(*) (void*)& thread_foo, NULL) != 0) {
        /* Handle Error */
    }

    /* ... */

    pthread_join(thread, NULL);

    if ((result = pthread_mutex_destroy(&mutex)) != 0) {
        /* Handle Error */
    }

    return 0;
}
```

In this example, in each thread created with `pthread_create`, the function `thread_foo` performs a network I/O operation with `recv` after acquiring a lock with `pthread_mutex_lock`. Other threads using the same lock variable `mutex` have to wait for the operation to complete and the lock to become available.

One possible correction is to call `recv` before acquiring the lock.

```
#include <pthread.h>
#include <sys/socket.h>

pthread_mutexattr_t attr;
pthread_mutex_t mutex;

void thread_foo(void *ptr) {
    unsigned int num;
    int result;
    int sock;

    /* sock is a connected TCP socket */
    if ((result = recv(sock, (void *)&num, sizeof(unsigned int), 0)) < 0) {
        /* Handle Error */
    }

    if ((result = pthread_mutex_lock(&mutex)) != 0) {
        /* Handle Error */
    }
}
```

```
    /* ... */

    if ((result = pthread_mutex_unlock(&mutex)) != 0) {
        /* Handle Error */
    }
}

int main() {
    pthread_t thread;
    int result;

    if ((result = pthread_mutexattr_settype(
        &attr, PTHREAD_MUTEX_ERRORCHECK)) != 0) {
        /* Handle Error */
    }

    if ((result = pthread_mutex_init(&mutex, &attr)) != 0) {
        /* Handle Error */
    }

    if (pthread_create(&thread, NULL, (void*)(*)(void*)& thread_foo, NULL) != 0) {
        /* Handle Error */
    }

    /* ... */

    pthread_join(thread, NULL);

    if ((result = pthread_mutex_destroy(&mutex)) != 0) {
        /* Handle Error */
    }

    return 0;
}
```

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BLOCKING\_WHILE\_LOCKED

**Impact:** Low

**CWE ID:** 667

**CERT C ID:** CON05-C, POS52-C  
**CERT C++ ID:** POS52-C

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Buffer overflow from incorrect string format specifier

String format specifier causes buffer argument of standard library functions to overflow

## Description

**Buffer overflow from incorrect string format specifier** occurs when the format specifier argument for functions such as `sscanf` leads to an overflow or underflow in the memory buffer argument.

## Risk

If the format specifier specifies a precision that is greater than the memory buffer size, an overflow occurs. Overflows can cause unexpected behavior such as memory corruption.

## Fix

Use a format specifier that is compatible with the memory buffer size.

## Examples

### Memory Buffer Overflow

```
#include <stdio.h>

void func (char *str[]) {
    char buf[32];
    sscanf(str[1], "%33c", buf);
}
```

In this example, `buf` can contain 32 `char` elements. Therefore, the format specifier `%33c` causes a buffer overflow.

One possible correction is to use a smaller precision in the format specifier.

```
#include <stdio.h>

void func (char *str[]) {
    char buf[32];
    sscanf(str[1], "%32c", buf);
}
```

## Result Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** STR\_FORMAT\_BUFFER\_OVERFLOW

**Impact:** High

**CWE ID:** 124, 125, 126, 127

**CERT C ID:** ARR38-C, STR03-C, STR31-C

**CERT C++ ID:** ARR38-C, STR31-C, STR50-CPP

**ISO/IEC TS 17961 ID:** taintformatio

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Call through non-prototyped function pointer

Function pointer declared without its type or number of parameters causes unexpected behavior

## Description

**Call through non-prototyped function pointer** detects a call to a function through a pointer without a prototype. A function prototype specifies the type and number of parameters.

## Risk

Arguments passed to a function without a prototype might not match the number and type of parameters of the function definition, which can cause undefined behavior. If the parameters are restricted to a subset of their type domain, arguments from untrusted sources can trigger vulnerabilities in the called function.

## Fix

Before calling the function through a pointer, provide a function prototype.

## Examples

### Argument Does Not Match Parameter Restriction

```
#include <stdio.h>
#include <limits.h>
#define SIZE2 2

typedef void (*func_ptr)();
extern int getchar_wrapper(void);
extern void restricted_int_sink(int i);
/* Integer value restricted to
```

```
range [-1, 255] */
extern void restricted_float_sink(double i);
/* Double value restricted to > 0.0 */

func_ptr generic_callback[SIZE2] =
{
    (func_ptr)restricted_int_sink,
    (func_ptr)restricted_float_sink
};

void func(void)
{
    int ic;
    ic = getchar_wrapper();
    /* Wrong index used for generic_callback.
    Negative 'int' passed to restricted_float_sink. */
    (*generic_callback[1])(ic);
}
```

In this example, a call through `func_ptr` passes `ic` as an argument to function `generic_callback[1]`. The type of `ic` can have negative values, while the parameter of `generic_callback[1]` is restricted to float values greater than `0.0`. Typically, compilers and static analysis tools cannot perform type checking when you do not provide a pointer prototype.

Pass the argument `ic` to a function with a parameter of type `int`, by using a properly prototyped pointer.

```
#include <stdio.h>
#include <limits.h>
#define SIZE2 2

typedef void (*func_ptr_proto)(int);
extern int getchar_wrapper(void);
extern void restricted_int_sink(int i);
/* Integer value restricted to
range [-1, 255] */
extern void restricted_float_sink(double i);
/* Double value restricted to > 0.0 */
```

```
func_ptr_proto generic_callback[SIZE2] =
{
    (func_ptr_proto)restricted_int_sink,
    (func_ptr_proto)restricted_float_sink
};

void func(void)
{
    int ic;
    ic = getchar_wrapper();
    /* ic passed to function through
properly prototyped pointer. */
    (*generic_callback[0])(ic);
}
```

## Result Information

**Group:** Programming

**Language:** C

**Default:** On

**Command-Line Syntax:** UNPROTOTYPED\_FUNC\_CALL

**Impact:** Medium

**ISO/IEC TS 17961 ID:** taintnoproto

## See Also

Declaration mismatch|Unreliable cast of function pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Call to memset with unintended value

memset or wmemset used with possibly incorrect arguments

### Description

**Call to memset with unintended value** occurs when Polyspace Bug Finder detects a use of the memset or wmemset function with possibly incorrect arguments.

`void *memset (void *ptr, int value, size_t num)` fills the first `num` bytes of the memory block that `ptr` points to with the specified `value`. If the argument `value` is incorrect, the memory block is initialized with an unintended value.

The unintended initialization can occur in the following cases.

Issue	Risk	Possible Fix
The second argument is <code>'0'</code> instead of <code>0</code> or <code>'\0'</code> .	The ASCII value of character <code>'0'</code> is 48 (decimal), <code>0x30</code> (hexadecimal), <code>069</code> (octal) but not <code>0</code> (or <code>'\0'</code> ).	If you want to initialize with <code>'0'</code> , use one of the ASCII values. Otherwise, use <code>0</code> or <code>'\0'</code> .
The second and third arguments are probably reversed. For instance, the third argument is a literal and the second argument is not a literal.	If the order is reversed, a memory block of unintended size is initialized with incorrect arguments.	Reverse the order of the arguments.

Issue	Risk	Possible Fix
The second argument cannot be represented in a byte.	If the second argument cannot be represented in a byte, and you expect each byte of a memory block to be filled with that argument, the initialization does not occur as intended.	<p>Apply a bit mask to the argument to produce a wrapped or truncated result that can be represented in a byte. When you apply a bit mask, make sure that it produces an expected result.</p> <p>For instance, replace <code>memset(a, -13, sizeof(a))</code> with <code>memset(a, (-13) &amp; 0xFF, sizeof(a))</code>.</p>

## Examples

### Value Cannot Be Represented in a Byte

```
#include <string.h>

#define SIZE 32
void func(void) {
    char buf[SIZE];
    int c = -2;
    memset(buf, (char)c, sizeof(buf));
}
```

In this example, `(char)c` cannot be represented in a byte.

One possible correction is to apply a cast so that the result can be represented in a byte. However, check that the result of the cast is an acceptable initialization value.

```
#include <string.h>

#define SIZE 32
void func(void) {
    char buf[SIZE];
}
```

```
    int c = -2;
    memset(buf, (unsigned char)c, sizeof(buf));
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MEMSET\_INVALID\_VALUE

**Impact:** Low

**CWE ID:** 665, 683

**CERT C ID:** INT31-C

**CERT C++ ID:** INT31-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Use of memset with size argument zero

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2015b

# Character value absorbed into EOF

Data type conversion makes a valid character value same as End-of-File (EOF)

## Description

**Character value absorbed into EOF** occurs when you perform a data type conversion that makes a valid character value indistinguishable from EOF (End-of-File). Bug Finder flags the defect in one of the following situations:

- *End-of-File*: You perform a data type conversion such as from `int` to `char` that converts a non-EOF character value into EOF.

```
char ch = (char) getchar()
```

You then compare the result with EOF.

```
if((int)ch == EOF)
```

The conversion can be explicit or implicit.

- *Wide End-of-File*: You perform a data type conversion that can convert a non-WEOF wide character value into WEOF, and then compare the result with WEOF.

## Risk

The data type `char` cannot hold the value EOF that indicates the end of a file. Functions such as `getchar` have return type `int` to accommodate EOF. If you convert from `int` to `char`, the values `UCHAR_MAX` (a valid character value) and EOF get converted to the same value -1 and become indistinguishable from each other. When you compare the result of this conversion with EOF, the comparison can lead to false detection of EOF. This rationale also applies to wide character values and WEOF.

## Fix

Perform the comparison with EOF or WEOF before conversion.

## Examples

### Return Value of `getchar` Converted to `char`

```
#include <stdio.h>
#include <stdlib.h>
#define fatal_error() abort()

char func(void)
{
    char ch;
    ch = getchar();
    if (EOF == (int)ch) {
        fatal_error();
    }
    return ch;
}
```

In this example, the return value of `getchar` is implicitly converted to `char`. If `getchar` returns `UCHAR_MAX`, it is converted to `-1`, which is indistinguishable from `EOF`. When you compare with `EOF` later, it can lead to a false positive.

One possible correction is to first perform the comparison with `EOF`, and then convert from `int` to `char`.

```
#include <stdio.h>
#include <stdlib.h>
#define fatal_error() abort()

char func(void)
{
    int i;
    i = getchar();
    if (EOF == i) {
        fatal_error();
    }
    else {
        return (char)i;
    }
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** CHAR\_EOF\_CONFUSED

**Impact:** High

**CWE ID:** 704

**CERT C ID:** FIO34-C

**CERT C++ ID:** FIO34-C

**ISO/IEC TS 17961 ID:** chreof

## See Also

### Polyspace Results

Errno not checked | Invalid use of standard library integer routine |  
Misuse of sign-extended character value | Returned value of a  
sensitive function not checked

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Closing a previously closed resource

Function closes a previously closed stream

### Description

**Closing a previously closed resource** occurs when a function attempts to close a stream that was closed earlier in your code and not reopened later.

### Risk

The standard states that the value of a FILE\* pointer is indeterminate after you close the stream associated with it. Performing the close operation on the FILE\* pointer again can cause unwanted behavior.

### Fix

Remove the redundant close operation.

## Examples

### Closing Previously Closed Resource

```
#include <stdio.h>

void func(char* data) {
    FILE* fp = fopen("file.txt", "w");
    if(fp!=NULL) {
        if(data)
            fputc(*data, fp);
        else
            fclose(fp);
    }
    fclose(fp);
}
```

In this example, if `fp` is not `NULL` and `data` is `NULL`, the `fclose` operation occurs on `fp` twice in succession.

One possible correction is to remove the last `fclose` operation. To avoid a resource leak, you must also place an `fclose` operation in the `if(data)` block.

```
#include <stdio.h>

void func(char* data) {
    FILE* fp = fopen("file.txt", "w");
    if(fp!=NULL) {
        if(data) {
            fputc(*data, fp);
            fclose(fp);
        }
        else
            fclose(fp);
    }
}
```

## Result Information

**Group:** Resource management

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `DOUBLE_RESOURCE_CLOSE`

**Impact:** High

**CWE ID:** 672, 826, 910

**CERT C ID:** FIO46-C

**CERT C++ ID:** FIO46-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Code deactivated by constant false condition

Code segment deactivated by `#if 0` directive or `if(0)` condition

## Description

**Code deactivated by constant false condition** occurs when a block of code is deactivated using a `#if 0` directive or `if(0)` condition.

## Examples

### Code Deactivated by Constant False Condition Error

```
#include<stdio.h>
int Trim_Value(int* Arr,int Size,int Cutoff)
{
    int Count=0;

    for(int i=0;i < Size;i++){
        if(Arr[i]>Cutoff){
            Arr[i]=Cutoff;
            Count++;
        }
    }

    #if 0
    /* Defect: Code Segment Deactivated */

    if(Count==0){
        printf("Values less than cutoff.");
    }
    #endif

    return Count;
}
```

In the preceding code, the `printf` statement is placed within a `#if #endif` directive. The software treats the portion within the directive as code comments and not compiled.

Unless you intended to deactivate the `printf` statement, one possible correction is to reactivate the block of code in the `#if #endif` directive. To reactivate the block, change `#if 0` to `#if 1`.

```
#include<stdio.h>
int Trim_Value(int* Arr,int Size,int Cutoff)
{
    int Count=0;

    for(int i=0;i < Size;i++)
    {
        if(Arr[i]>Cutoff)
        {
            Arr[i]=Cutoff;
            Count++;
        }
    }

    /* Fix: Replace #if 0 by #if 1 */
    #if 1
        if(Count==0)
        {
            printf("Values less than cutoff.");
        }
    #endif

    return Count;
}
```

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** off

**Command-Line Syntax:** DEACTIVATED\_CODE

**Impact:** Low

## See Also

### **Polyspace Analysis Options**

Find defects (-checkers)

### **Polyspace Results**

Dead code | Unreachable code | Useless if

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### **Introduced in R2013b**

## Command executed from externally controlled path

Path argument from an unsecure source

### Description

**Command executed from externally controlled path** checks the path of commands that the application controls. If the path of a command is from or constructed from external sources, Bug Finder flags the command function.

### Risk

An attacker can:

- Change the command that the program executes, possibly to a command that only the attack can control.
- Change the environment in which the command executes, by which the attacker controls what the command means and does.

### Fix

Before calling the command, validate the path to make sure that it is the intended location.

## Examples

### Executing Path from Environment Variable

```
#include <stdlib.h>
#include <stdio.h>
#include <string.h>

enum {
```

```

    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

void bug_taintedpathcmd() {
    char cmd[SIZE128] = "";
    char* userpath = getenv("MYAPP_PATH");

    strncpy(cmd, userpath, SIZE100);
    strcat(cmd, "/ls *");
    /* Launching command */
    system(cmd);
}

```

This example obtains a path from an environment variable `MYAPP_PATH`. `system` runs a command from that path without checking the value of the path. If the path is not the intended path, your program executes in the wrong location.

One possible correction is to use a list of allowed paths to match against the environment variable path.

```

#include <stdlib.h>
#include <stdio.h>
#include <string.h>

enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

/* Function to sanitize a string */
int sanitize_str(char* s, size_t n) {
    int res = 0;
    /* String is ok if */
    if (s && n>0 && n<SIZE128) {
        /* - string is not null */
        /* - string has a positive and limited size */
        s[n-1] = '\0'; /* Add a security \0 char at end of string */
        /* Tainted pointer detected above, used as "firewall" */
        res = 1;
    }
    return res;
}

```

```
}

/* Authorized path ids */
enum { PATH0=1, PATH1, PATH2 };

void taintedpathcmd() {
    char cmd[SIZE128] = "";

    char* userpathid = getenv("MYAPP_PATH_ID");
    if (sanitize_str(userpathid, SIZE100)) {
        int pathid = atoi(userpathid);

        char path[SIZE128] = "";
        switch(pathid) {
            case PATH0:
                strcpy(path, "/usr/local/my_app0");
                break;
            case PATH1:
                strcpy(path, "/usr/local/my_app1");
                break;
            case PATH2:
                strcpy(path, "/usr/local/my_app2");
                break;
            default:
                /* do nothing */
                break;
        }
        if (strlen(path)>0) {
            strncpy(cmd, path, SIZE100);
            strcat(cmd, "/ls *");
            system(cmd);
        }
    }
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_PATH\_CMD

**Impact:** Medium

**CWE ID:** 114, 426

**CERT C ID:** API00-C, ENV33-C, STR02-C

**CERT C++ ID:** ENV33-C

**ISO/IEC TS 17961 ID:** syscall

## See Also

Execution of externally controlled command|Use of externally controlled environment variable|Host change using externally controlled elements|Library loaded from externally controlled path

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Constant block cipher initialization vector

Initialization vector is constant instead of randomized

### Description

**Constant block cipher initialization vector** occurs when you use a constant for the initialization vector (IV) during encryption.

### Risk

Using a constant IV is equivalent to not using an IV. Your encrypted data is vulnerable to dictionary attacks.

Block ciphers break your data into blocks of fixed size. Block cipher modes such as CBC (Cipher Block Chaining) protect against dictionary attacks by XOR-ing each block with the encrypted output from the previous block. To protect the first block, these modes use a random initialization vector (IV). If you use a constant IV to encrypt multiple data streams that have a common beginning, your data becomes vulnerable to dictionary attacks.

### Fix

Produce a random IV by using a strong random number generator.

For a list of random number generators that are cryptographically weak, see [Vulnerable pseudo-random number generator](#).

## Examples

### Constants Used for Initialization Vector

```
#include <openssl/evp.h>
#include <stdlib.h>
```

```
#define SIZE16 16

/* Using the cryptographic routines */

int func(EVP_CIPHER_CTX *ctx, unsigned char *key){
    unsigned char iv[SIZE16] = {'1', '2', '3', '4', '5', '6', 'b', '8', '9',
                                '1', '2', '3', '4', '5', '6', '7'};
    return EVP_CipherInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv, 1);
}
```

In this example, the initialization vector `iv` has constants only. The constant initialization vector makes your cipher vulnerable to dictionary attacks.

One possible correction is to use a strong random number generator to produce the initialization vector. The corrected code here uses the function `RAND_bytes` declared in `openssl/rand.h`.

```
#include <openssl/evp.h>
#include <openssl/rand.h>
#include <stdlib.h>
#define SIZE16 16

/* Using the cryptographic routines */

int func(EVP_CIPHER_CTX *ctx, unsigned char *key){
    unsigned char iv[SIZE16];
    RAND_bytes(iv, 16);
    return EVP_CipherInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv, 1);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_CONSTANT\_IV

**Impact:** Medium

**CWE ID:** 310, 326, 329

**CERT C ID:** MSC18-C

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

# Constant cipher key

Encryption or decryption key is constant instead of randomized

## Description

**Constant cipher key** occurs when you use a constant for the encryption or decryption key.

## Risk

If you use a constant for the encryption or decryption key, an attacker can retrieve your key easily.

You use a key to encrypt and later decrypt your data. If a key is easily retrieved, data encrypted using that key is not secure.

## Fix

Produce a random key by using a strong random number generator.

For a list of random number generators that are cryptographically weak, see [Vulnerable pseudo-random number generator](#).

## Examples

### Constants Used for Key

```
#include <openssl/evp.h>
#include <stdlib.h>
#define SIZE16 16

int func(EVP_CIPHER_CTX *ctx, unsigned char *iv){
    unsigned char key[SIZE16] = {'1', '2', '3', '4', '5', '6', 'b', '8', '9',
```

```
        '1','2','3','4','5','6','7'};
    return EVP_CipherInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv, 1);
}
```

In this example, the cipher key, `key`, has constants only. An attacker can easily retrieve a constant key.

Use a strong random number generator to produce the cipher key. The corrected code here uses the function `RAND_bytes` declared in `openssl/rand.h`.

```
#include <openssl/evp.h>
#include <openssl/rand.h>
#include <stdlib.h>
#define SIZE16 16

int func(EVP_CIPHER_CTX *ctx, unsigned char *iv){
    unsigned char key[SIZE16];
    RAND_bytes(key, 16);
    return EVP_CipherInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv, 1);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_CONSTANT\_KEY

**Impact:** Medium

**CWE ID:** 310, 320, 321, 326, 522

**CERT C ID:** MSC18-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Context initialized incorrectly for cryptographic operation

Context used for public key cryptography operation is initialized for a different operation

### Description

**Context initialized incorrectly for cryptographic operation** occurs when you initialize an `EVP_PKEY_CTX` object for a specific public key cryptography operation but use the object for a different operation.

For instance, you initialize the context for encryption.

```
ret = EVP_PKEY_encrypt_init(ctx);
```

However, you use the context for decryption without reinitializing the context.

```
ret = EVP_PKEY_decrypt(ctx, out, &out_len, in, in_len);
```

The checker detects if the context object used in these functions has been initialized by using the corresponding initialization functions: `EVP_PKEY_paramgen`, `EVP_PKEY_keygen`, `EVP_PKEY_encrypt`, `EVP_PKEY_verify`, `EVP_PKEY_verify_recover`, `EVP_PKEY_decrypt`, `EVP_PKEY_sign`, `EVP_PKEY_derive`, and `EVP_PKEY_derive_set_peer`.

### Risk

Mixing up different operations on the same context can lead to obscure code. It is difficult to determine at a glance whether the current object is used for encryption, decryption, signature, or another operation. The mixup can also lead to a failure in the operation or unexpected ciphertext.

### Fix

After you set up a context for a certain family of operations, use the context for only that family of operations. For instance, use these pairs of functions for initialization and usage of the `EVP_PKEY_CTX` context object.

- For encryption with `EVP_PKEY_encrypt`, initialize the context with `EVP_PKEY_encrypt_init`.
- For signature verification with `EVP_PKEY_verify`, initialize the context with `EVP_PKEY_verify_init`.
- For key generation with `EVP_PKEY_keygen`, initialize the context with `EVP_PKEY_keygen_init`.

If you want to reuse an existing context object for a different family of operations, reinitialize the context.

## Examples

### Encryption Using Context Initialized for Decryption

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf10;
size_t out_len10;
int func(unsigned char *src, size_t len, EVP_PKEY_CTX *ctx){
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_decrypt_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_encrypt(ctx, out_buf10, &out_len10, src, len);
}
```

In this example, the context is initialized for decryption but used for encryption.

One possible correction is to initialize the object for encryption.

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
```

```
unsigned char *out_buf10;
size_t out_len10;
int func(unsigned char *src, size_t len, EVP_PKEY_CTX *ctx){
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_encrypt_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_encrypt(ctx, out_buf10, &out_len10, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_PKEY\_INCORRECT\_INIT

**Impact:** Medium

**CWE ID:** 310, 325, 372, 573, 664

## See Also

Incorrect key for cryptographic algorithm|Missing parameters for key generation|Missing data for encryption, decryption or signing operation|Missing peer key|Missing private key|Missing public key|Nonsecure parameters for key generation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## Introduced in R2018a

# Context initialized incorrectly for digest operation

Context used for digest operation is initialized for a different digest operation

## Description

**Context initialized incorrectly for digest operation** occurs when you initialize an `EVP_MD_CTX` context object for a specific digest operation but use the context for a different operation.

For instance, you initialize the context for creating a message digest only.

```
ret = EVP_DigestInit(ctx, EVP_sha256())
```

However, you perform a final step for signing:

```
ret = EVP_SignFinal(&ctx, out, &out_len, pkey);
```

The error is shown only if the final step is not consistent with the initialization of the context. If the intermediate update steps are inconsistent, it does not trigger an error because the intermediate steps do not depend on the nature of the operation. For instance, `EVP_DigestUpdate` works identically to `EVP_SignUpdate`.

## Risk

Mixing up different operations on the same context can lead to obscure code. It is difficult to determine at a glance whether the current object is used for message digest creation, signing, or verification. The mixup can also lead to a failure in the operation or unexpected message digest.

## Fix

After you set up a context for a certain family of operations, use the context for only that family of operations. For instance, use these pairs of functions for initialization and final steps.

- `EVP_DigestInit` : `EVP_DigestFinal`
- `EVP_DigestInit_ex` : `EVP_DigestFinal_ex`
- `EVP_DigestSignInit` : `EVP_DigestSignFinal`

If you want to reuse an existing context object for a different family of operations, reinitialize the context.

## Examples

### Inconsistent Initial and Final Digest Operation

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf16;
unsigned int out_len16;

void func(unsigned char *src, size_t len){
    EVP_MD_CTX* ctx = EVP_MD_CTX_create();

    ret = EVP_SignInit_ex(ctx, EVP_sha256(), NULL);
    if (ret != 1) fatal_error();

    ret = EVP_SignUpdate(ctx, src, len);
    if (ret != 1) fatal_error();

    ret = EVP_DigestSignFinal(ctx, out_buf16, (size_t*) out_len16);

    if (ret != 1) fatal_error();
}
```

In this example, the context object is initialized for signing only with `EVP_SignInit` but the final step attempts to create a signed digest with `EVP_DigestSignFinal`.

One possible correction is to use the context object for signing only. Change the final step to `EVP_SignFinal` in keeping with the initialization step.

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf16;
unsigned int out_len16;

void corrected_cryptomdbadfunction(unsigned char *src, size_t len, EVP_PKEY* pkey){
    EVP_MD_CTX* ctx = EVP_MD_CTX_create();

    ret = EVP_SignInit_ex(ctx, EVP_sha256(), NULL);
    if (ret != 1) fatal_error();

    ret = EVP_SignUpdate(ctx, src, len);
    if (ret != 1) fatal_error();

    ret = EVP_SignFinal(ctx, out_buf16, &out_len16, pkey);
    if (ret != 1) fatal_error();
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_MD\_BAD\_FUNCTION

**Impact:** Medium

**CWE ID:** 310, 353, 354, 372, 573, 664

## See Also

Nonsecure hash algorithm

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Copy constructor not called in initialization list

Copy constructor does not call copy constructors of some members or base classes

### Description

**Copy constructor not called in initialization list** occurs when the copy constructor of a class does not call the *copy constructor* of the following in its initialization list:

- One or more of its members.
- Its base classes when applicable.

The defect occurs even when a base class constructor is called instead of the base class copy constructor.

### Risk

The calls to the copy constructors can be done only from the initialization list. If the calls are missing, it is possible that an object is only partially copied.

- If the copy constructor of a member is not called, it is possible that the member is not copied.
- If the copy constructor of a base class is not called, it is possible that the base class members are not copied.

### Fix

If you want your copy constructor to perform a complete copy, call the copy constructor of all members and all base classes in its initialization list.

## Examples

### Base Class Copy Constructor Not Called

```
class Base {
public:
    Base();
    Base(int);
    Base(const Base&);
    virtual ~Base();
private:
    int ib;
};

class Derived:public Base {
public:
    Derived();
    ~Derived();
    Derived(const Derived& d): Base(), i(d.i) { }
private:
    int i;
};
```

In this example, the copy constructor of class `Derived` calls the default constructor, but not the copy constructor of class `Base`.

The defect appears on the `:` symbol in the copy constructor definition. Following are some tips for navigating in the source code:

- To navigate to the class definition, right-click a member that is initialized in the constructor. Select **Go To Definition**. In the class definition, you see the class members, including those members whose copy constructors are not called.
- To navigate to a base class definition, first navigate to the derived class definition. In the derived class definition, where the derived class inherits from a base class, right-click the base class name and select **Go To Definition**.

One possible correction is to call the copy constructor of class `Base` from the initialization list of the `Derived` class copy constructor.

```
class Base {
public:
```

```
    Base();
    Base(int);
    Base(const Base&);
    virtual ~Base();
private:
    int ib;
};

class Derived:public Base {
public:
    Derived();
    ~Derived();
    Derived(const Derived& d): Base(d), i(d.i) { }
private:
    int i;
};
```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** On

**Command-Line Syntax:** MISSING\_COPY\_CTOR\_CALL

**Impact:** High

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Base class assignment operator not called

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Copy operation modifying source operand

Copy operation modifies data member of source object

## Description

**Copy operation modifying source operand** occurs when a copy constructor or copy assignment operator modifies a mutable data member of its source operand.

For instance, this copy constructor A modifies the data member m of its source operand other:

```
class A {
    mutable int m;

public:
    ...
    A(const A &other) : m(other.m) {
        other.m = 0; //Modification of source
    }
}
```

## Risk

A copy operation with a copy constructor (or copy assignment operator):

```
className new_object = old_object; //Calls copy constructor of className
```

copies its source operand `old_object` to its destination operand `new_object`. After the operation, you expect the destination operand to be a copy of the unmodified source operand. If the source operand is modified during copy, this assumption is violated.

## Fix

Do not modify the source operand in the copy operation.

If you are modifying the source operand in a copy constructor to implement a move operation, use a move constructor instead. Move constructors are defined in the C++11 standard and later.

## Examples

### Copy Constructor Modifying Source

```
#include <algorithm>
#include <vector>

class A {
    mutable int m;

public:
    A() : m(0) {}
    explicit A(int m) : m(m) {}

    A(const A &other) : m(other.m) {
        other.m = 0;
    }

    A& operator=(const A &other) {
        if (&other != this) {
            m = other.m;
            other.m = 0;
        }
        return *this;
    }

    int get_m() const { return m; }
};

void f() {
    std::vector<A> v{10};
    A obj(12);
    std::fill(v.begin(), v.end(), obj);
}
```

In this example, a vector of ten objects of type `A` is created. The `std::fill` function copies an object of type `A`, which has a data member with value 12, to each of the ten objects. After this operation, you might expect that all ten objects in the vector have a data member with value 12.

However, the first copy modifies the data member of the source to the value 0. The remaining nine copies copy this value. After the `std::fill` call, the first object in the

vector has a data member with value 12 and the remaining objects have data members with value 0.

Do not modify data members of the source operand in a copy constructor or copy assignment operator. If you want your class to have a move operation, use a move constructor instead of a copy constructor.

In this corrected example, the copy constructor and copy assignment operator of class A do not modify the data member m. A separate move constructor modifies the source operand.

```
#include <algorithm>
#include <vector>

class A {
    int m;

public:
    A() : m(0) {}
    explicit A(int m) : m(m) {}

    A(const A &other) : m(other.m) {}
    A(A &&other) : m(other.m) { other.m = 0; }

    A& operator=(const A &other) {
        if (&other != this) {
            m = other.m;
        }
        return *this;
    }

    //Move constructor
    A& operator=(A &&other) {
        m = other.m;
        other.m = 0;
        return *this;
    }

    int get_m() const { return m; }
};

void f() {
```

```
std::vector<A> v{10};  
A obj(12);  
std::fill(v.begin(), v.end(), obj);  
}
```

## Result Information

**Group:** Object Oriented

**Language:** C++

**Default:** On

**Command-Line Syntax:** COPY\_MODIFYING\_SOURCE

**Impact:** Medium

**CERT C++ ID:** OOP58-CPP

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### External Websites

Move constructors (C++11 and beyond)

### Introduced in R2018b

# Copy of overlapping memory

Source and destination arguments of a copy function have overlapping memory

## Description

**Copy of overlapping memory** occurs when there is a memory overlap between the source and destination argument of a copy function such as `memcpy` or `strcpy`. For instance, the source and destination arguments of `strcpy` are pointers to different elements in the same string.

## Risk

If there is memory overlap between the source and destination arguments of copy functions, according to C standards, the behavior is undefined.

## Fix

Determine if the memory overlap is what you want. If so, find an alternative function. For instance:

- If you are using `memcpy` to copy values from one memory location to another, use `memmove` instead of `memcpy`.
- If you are using `strcpy` to copy one string to another, use `memmove` instead of `strcpy`, as follows:

```
s = strlen(source);  
memmove(destination, source, s + 1);
```

`strlen` determines the string length without the null terminator. Therefore, you must move `s+1` bytes instead of `s` bytes.

## Examples

### Overlapping Copy

```
#include <string.h>

char str[] = {"ABCDEFGH"};

void my_copy() {
    strcpy(&str[0],(const char*)&str[2]);
}
```

In this example, because the source and destination argument are pointers to the same string `str`, there is memory overlap between their allowed buffers.

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** OVERLAPPING\_COPY

**Impact:** Medium

**CWE ID:** 475, 628, 687

**CERT C ID:** EXP43-C, MSC15-C

**ISO/IEC TS 17961 ID:** restrict

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Overlapping assignment

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Data race

Multiple tasks perform unprotected nonatomic operations on shared variable

## Description

Data race occurs when:

- 1 Multiple tasks perform unprotected operations on a shared variable.
- 2 At least one task performs a read operation and another task performs a write operation.
- 3 At least one operation is nonatomic. For data race on both atomic and nonatomic operations, see `Data race including atomic operations`.

See also “Define Atomic Operations in Multitasking Code”.

To find this defect, you must specify the multitasking options before analysis. To specify these options, on the **Configuration** pane, select **Multitasking**. For more information, see “Configuring Polyspace Multitasking Analysis Manually”.

## Risk

Data race can result in unpredictable values of the shared variable because you do not control the order of the operations in different tasks.

Data races between two write operations are more serious than data races between a write and read operation. Two write operations can interfere with each other and result in indeterminate values. To identify write-write conflicts, use the filters on the **Detail** column of the **Results List** pane. For these conflicts, the **Detail** column shows the additional line:

```
Variable value may be altered by write-write concurrent access.
```

See “Filter and Group Results”.

## Fix

To fix this defect, protect the operations on the shared variable using critical sections or temporal exclusion. See `Critical section details (-critical-section-begin`

-critical-section-end) and Temporally exclusive tasks (-temporal-exclusions-file).

To identify existing protections that you can reuse, see the table and graphs associated with the result. The table shows each pair of conflicting calls. The **Access Protections** column shows existing protections on the calls. To see the function call sequence leading

to the conflicts, click the  icon. For an example, see below.

## Examples

### Unprotected Operation on Global Variable from Multiple Tasks

```
int var;
void begin_critical_section(void);
void end_critical_section(void);

void increment(void) {
    var++;
}

void task1(void) {
    increment();
}

void task2(void) {
    increment();
}

void task3(void) {
    begin_critical_section();
    increment();
    end_critical_section();
}
```

In this example, to emulate multitasking behavior, specify the following options:

Option	Specification	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	task1 task2 task3	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	begin_critical_section	end_critical_section

On the command-line, you can use the following:

```
polyspace-bug-finder-nodesktop
  -entry-points task1,task2,task3
  -critical-section-begin begin_critical_section:cs1
  -critical-section-end end_critical_section:cs1
```

In this example, the tasks `task1`, `task2`, and `task3` call the function `increment`. `increment` contains the operation `var++` that can involve multiple machine instructions including:

- Reading `var`.
- Writing an increased value to `var`.


These machine instructions, when executed from `task1` and `task2`, can occur concurrently in an unpredictable sequence. For example, reading `var` from `task1` can occur either before or after writing to `var` from `task2`. Therefore the value of `var` can be unpredictable.

Though `task3` calls `increment` inside a critical section, other tasks do not use the same critical section. The operations in the critical section of `task3` are not mutually exclusive with operations in other tasks.

Therefore, the three tasks are operating on a shared variable without common protection. In your result details, you see each pair of conflicting function calls.

	Access	Access Protections	Task	File
	Read	No protection	task1()	data_race .c
	Write (Non atomic)	No protection	task2()	data_race .c
	Operation might involve multiple machine instructions			
	Read	No protection	task1()	data_race .c
	Write (Non atomic)	<b>Critical section begin_critical_section...end_critical_section</b>	task3()	data_race .c
	Operation might involve multiple machine instructions			
	Read	No protection	task2()	data_race .c
	Write (Non atomic)	<b>Critical section begin_critical_section...end_critical_section</b>	task3()	data_race .c
	Operation might involve multiple machine instructions			

If you click the  icon, you see the function call sequence starting from the entry point to the read or write operation. You also see that the operation starting from `task3` is in a critical section. The **Access Protections** entry shows the lock and unlock function that begin and end the critical section. In this example, you see the functions `begin_critical_section` and `end_critical_section`.

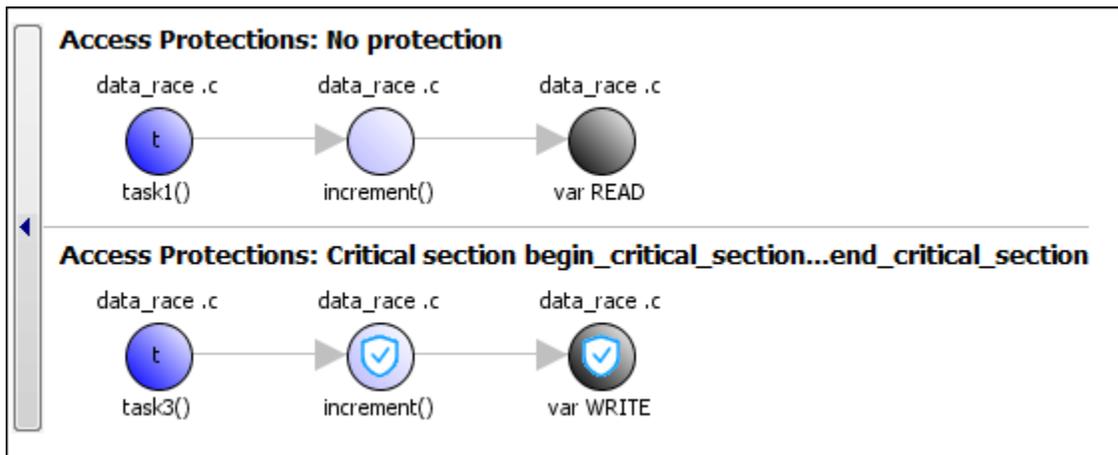

One possible correction is to place the operation in critical section. You can implement the critical section in multiple ways. For instance:

- You can place `var++` in a critical section. When `task1` enters its critical section, the other tasks cannot enter their critical sections until `task1` leaves its critical section. The operation `var++` from the three tasks cannot interfere with each other.

To implement the critical section, in the function `increment`, place the operation `var++` between calls to `begin_critical_section` and `end_critical_section`.

```
int var;

void begin_critical_section(void);
void end_critical_section(void);

void increment(void) {
    begin_critical_section();
    var++;
    end_critical_section();
}

void task1(void) {
    increment();
}

void task2(void) {
    increment();
}

void task3(void) {
    increment();
}
```

- You can place the call to `increment` in the same critical section in the three tasks. When `task1` enters its critical section, the other tasks cannot enter their critical sections until `task1` leaves its critical section. The calls to `increment` from the three tasks cannot interfere with each other.

To implement the critical section, in each of the three tasks, call `increment` between calls to `begin_critical_section` and `end_critical_section`.

```
int var;

void begin_critical_section(void);
void end_critical_section(void);

void increment(void) {
    var++;
}
```

```

void task1(void) {
    begin_critical_section();
    increment();
    end_critical_section();
}

void task2(void) {
    begin_critical_section();
    increment();
    end_critical_section();
}

void task3(void) {
    begin_critical_section();
    increment();
    end_critical_section();
}

```

Another possible correction is to make the tasks, `task1`, `task2` and `task3`, temporally exclusive. Temporally exclusive tasks cannot execute concurrently.

On the **Configuration** pane, specify the following additional options:

Option	Value
<b>Temporally exclusive tasks</b> on page 1-135	task1 task2 task3

On the command-line, you can use the following:

```

polyspace-code-prover-nodesktop
    -temporal-exclusions-file "C:\exclusions_file.txt"

```

where the file `C:\exclusions_file.txt` has the following line:

```
task1 task2 task3
```

## Unprotected Operation in Threads Created with `pthread_create`

```
#include <pthread.h>
```

```
pthread_mutex_t count_mutex;
long long count;

void* increment_count(void* args)
{
    count = count + 1;
    return NULL;
}

void* set_count(void *args)
{
    long long c;
    c = count;
    return NULL;
}

int main(void)
{
    pthread_t thread_increment;
    pthread_t thread_get;

    pthread_create(&thread_increment, NULL, increment_count, NULL);
    pthread_create(&thread_get, NULL, set_count, NULL);

    pthread_join(thread_get, NULL);
    pthread_join(thread_increment, NULL);

    return 1;
}
```

In this example, Bug Finder detects the creation of separate threads with `pthread_create`. The **Data race** defect is raised because the operation `count = count + 1` in the thread with id `thread_increment` conflicts with the operation `c = count` in the thread with id `thread_get`. The variable `count` is accessed in multiple threads without a common protection.

The two conflicting operations are nonatomic. The operation `c = count` is nonatomic on 32-bit targets. See “Define Atomic Operations in Multitasking Code”.

To prevent concurrent access on the variable `count`, protect operations on `count` with a critical section. Use the functions `pthread_mutex_lock` and `pthread_mutex_unlock` to implement the critical section.

```
#include <pthread.h>

pthread_mutex_t count_mutex;
long long count;

void* increment_count(void* args)
{
    pthread_mutex_lock(&count_mutex);
    count = count + 1;
    pthread_mutex_unlock(&count_mutex);
    return NULL;
}

void* set_count(void *args)
{
    long long c;
    pthread_mutex_lock(&count_mutex);
    c = count;
    pthread_mutex_unlock(&count_mutex);
    return NULL;
}

int main(void)
{
    pthread_t thread_increment;
    pthread_t thread_get;

    pthread_create(&thread_increment, NULL, increment_count, NULL);
    pthread_create(&thread_get, NULL, set_count, NULL);

    pthread_join(thread_get, NULL);
    pthread_join(thread_increment, NULL);

    return 1;
}
```

## Check Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** DATA\_RACE

**Impact:** High

**CWE ID:** 366, 413

**CERT C ID:** CON09-C, CON32-C, CON43-C, POS49-C

**CERT C++ ID:** CON43-C, POS49-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Target processor type (-target) | Configure multitasking manually | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file) | Disabling all interrupts (-routine-disable-interrupts -routine-enable-interrupts)

### Polyspace Results

Data race including atomic operations | Data race through standard library function call | Deadlock | Destruction of locked mutex | Double lock | Double unlock | Missing lock | Missing unlock

## Topics

“Analyze Multitasking Programs in Polyspace”

“Protections for Shared Variables in Multitasking Code”

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

“Define Atomic Operations in Multitasking Code”

### Introduced in R2014b

# Data race including atomic operations

Multiple tasks perform unprotected operations on shared variable

## Description

Data race occurs when:

- 1 Multiple tasks perform unprotected operations on a shared variable.
- 2 At least one task performs a read operation and another task performs a write operation.

If you check for this defect, you can see data races on both atomic and non-atomic operations. To see data races on non-atomic operations alone, select **Data race**. See also “Define Atomic Operations in Multitasking Code”.

To find this defect, you must specify the multitasking options before analysis. To specify these options, on the **Configuration** pane, select **Multitasking**.

## Examples

### Unprotected Atomic Operation on Global Variable from Multiple Tasks

```
#include<stdio.h>

int var;

void begin_critical_section(void);
void end_critical_section(void);

void task1(void) {
    var = 1;
}

void task2(void) {
```

```

    int local_var;
    local_var = var;
    printf("%d", local_var);
}

void task3(void) {
    begin_critical_section();
    /* Operations in task3 */
    end_critical_section();
}

```

In this example, to emulate multitasking behavior, specify the following options:

Option	Specification	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	task1 task2 task3	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	begin_critical_section	end_critical_section

On the command-line, you can use the following:

```

polyspace-bug-finder-nodesktop
  -entry-points task1,task2,task3
  -critical-section-begin begin_critical_section:cs1
  -critical-section-end end_critical_section:cs1

```

In this example, the write operation `var=1;` in task `task1` executes concurrently with the read operation `local_var=var;` in task `task2`.

`task3` uses a critical section that can be reused for the other tasks.

One possible correction is to place these operations in the same critical section:

- `var=1;` in `task1`
- `local_var=var;` in `task2`

When `task1` enters its critical section, the other tasks cannot enter their critical sections until `task1` leaves its critical section. Therefore, the two operations cannot execute concurrently.

To implement the critical section, reuse the already existing critical section in `task3`. Place the two operations between calls to `begin_critical_section` and `end_critical_section`.

```
#include<stdio.h>

int var;

void begin_critical_section();
void end_critical_section();

void task1(void) {
    begin_critical_section();
    var = 1;
    end_critical_section();
}

void task2(void) {
    int local_var;
    begin_critical_section();
    local_var = var;
    end_critical_section();
    printf("%d", local_var);
}

void task3(void) {
    begin_critical_section();
    /* Operations in task3 */
    end_critical_section();
}
```

Another possible correction is to make the tasks `task1` and `task2` temporally exclusive. Temporally exclusive tasks cannot execute concurrently.

On the **Configuration** pane, specify the following additional options:

Option	Value
<b>Temporally exclusive tasks</b> on page 1-135	task1 task2

On the command-line, use the following:

```
polyspace-code-prover-nodesktop  
-temporal-exclusions-file "C:\exclusions_file.txt"
```

where the file C:\exclusions\_file.txt has the following line:

```
task1 task2
```

## Check Information

**Group:** Concurrency

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** DATA\_RACE\_ALL

**Impact:** Medium

**CWE ID:** 366, 413

**CERT C ID:** CON00-C

**CERT C++ ID:** CON52-CPP

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Configure multitasking manually | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file) | Disabling all interrupts (-routine-disable-interrupts -routine-enable-interrupts)

### Polyspace Results

Data race | Data race through standard library function call | Deadlock | Destruction of locked mutex | Double lock | Double unlock | Missing lock | Missing unlock

## **Topics**

“Configuring Polyspace Multitasking Analysis Manually”

“Protections for Shared Variables in Multitasking Code”

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

“Define Atomic Operations in Multitasking Code”

**Introduced in R2014b**

## Data race through standard library function call

Multiple tasks make unprotected calls to thread-unsafe standard library function

### Description

**Data race through standard library function call** occurs when:

- 1 Multiple tasks call the same standard library function.

For instance, multiple tasks call the `strerror` function.

- 2 The calls are not protected using a common protection.

For instance, the calls are not protected by the same critical section.

Functions flagged by this defect are not guaranteed to be reentrant. A function is reentrant if it can be interrupted and safely called again before its previous invocation completes execution. If a function is not reentrant, multiple tasks calling the function without protection can cause concurrency issues. For the list of functions that are flagged, see [CON33-C: Avoid race conditions when using library functions](#).

To find this defect, you must specify the multitasking options before analysis. To specify these options, on the **Configuration** pane, select **Multitasking**. For more information, see “Configuring Polyspace Multitasking Analysis Manually”.

### Risk

The functions flagged by this defect are nonreentrant because their implementations can use global or static variables. When multiple tasks call the function without protection, the function call from one task can interfere with the call from another task. The two invocations of the function can concurrently access the global or static variables and cause unpredictable results.

The calls can also cause more serious security vulnerabilities, such as abnormal termination, denial-of-service attack, and data integrity violations.

## Fix

To fix this defect, do one of the following:

- Use a reentrant version of the standard library function if it exists.

For instance, instead of `strerror()`, use `strerror_r()` or `strerror_s()`. For alternatives to functions flagged by this defect, see the documentation for CON33-C.

- Protect the function calls using common critical sections or temporal exclusion.

See `Critical section details (-critical-section-begin -critical-section-end)` and `Temporally exclusive tasks (-temporal-exclusions-file)`.

To identify existing protections that you can reuse, see the table and graphs associated with the result. The table shows each pair of conflicting calls. The **Access Protections** column shows existing protections on the calls. To see the function call

sequence leading to the conflicts, click the  icon. For an example, see below.

## Examples

### Unprotected Call to Standard Library Function from Multiple Tasks

```
#include <errno.h>
#include <stdio.h>
#include <string.h>

void begin_critical_section(void);
void end_critical_section(void);

FILE *getFilePointer(void);

void func(FILE *fp) {
    fpos_t pos;
    errno = 0;
    if (0 != fgetpos(fp, &pos)) {
        char *errmsg = strerror(errno);
```

```

    printf("Could not get the file position: %s\n", errmsg);
}
}

void task1(void) {
    FILE* fptr1 = getFilePointer();
    func(fptr1);
}

void task2(void) {
    FILE* fptr2 = getFilePointer();
    func(fptr2);
}

void task3(void) {
    FILE* fptr3 = getFilePointer();
    begin_critical_section();
    func(fptr3);
    end_critical_section();
}

```

In this example, to emulate multitasking behavior, specify the following options:

Option	Specification	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	task1 task2 task3	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	begin_critical_section	end_critical_section

On the command-line, you can use the following:

```

polyspace-bug-finder-nodesktop
  -entry-points task1,task2,task3
  -critical-section-begin begin_critical_section:cs1
  -critical-section-end end_critical_section:cs1

```

In this example, the tasks, `task1`, `task2` and `task3`, call the function `func`. `func` calls the nonreentrant standard library function, `strerror`.


Though `task3` calls `func` inside a critical section, other tasks do not use the same critical section. Operations in the critical section of `task3` are not mutually exclusive with operations in other tasks.

These three tasks are calling a nonreentrant standard library function without common protection. In your result details, you see each pair of conflicting function calls.

**! Data race through standard library function call** (Impact: High)    
 Certain calls to function 'strerror' can interfere with each other and cause unpredictable results.   
 To avoid interference, calls to 'strerror' must be in the same critical section.

	Access	Access Protections	Task	File	Scope	Line
	Function call (Non atomic) Operation involves function call	No protection	task1()	data_race_std_lib.c	func()	14
	Function call (Non atomic) Operation involves function call	No protection	task2()	data_race_std_lib.c	func()	14
	Function call (Non atomic) Operation involves function call	No protection	task2()	data_race_std_lib.c	func()	14
	Function call (Non atomic) Operation involves function call	<b>Critical section begin_critical_section...end_critical_section</b>	task3()	data_race_std_lib.c	func()	14
	Function call (Non atomic) Operation involves function call	No protection	task1()	data_race_std_lib.c	func()	14
	Function call (Non atomic) Operation involves function call	<b>Critical section begin_critical_section...end_critical_section</b>	task3()	data_race_std_lib.c	func()	14

If you click the  icon, you see the function call sequence starting from the entry point to the standard library function call. You also see that the call starting from `task3` is in a critical section. The **Access Protections** entry shows the lock and unlock function that begin and end the critical section. In this example, you see the functions `begin_critical_section` and `end_critical_section`.

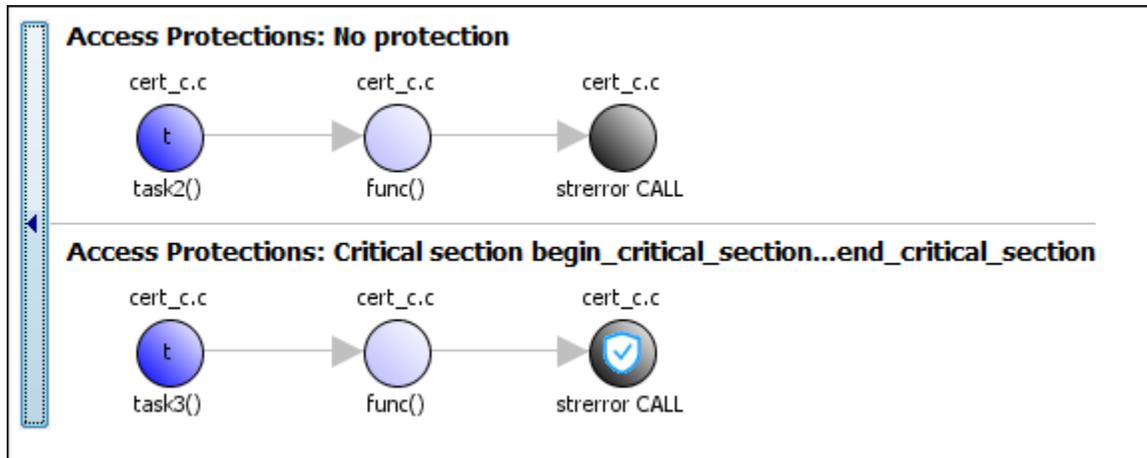

One possible correction is to use a reentrant version of the standard library function `strerror`. You can use the POSIX version `strerror_r` which has the same functionality but also guarantees thread-safety.

```
#include <errno.h>
#include <stdio.h>
#include <string.h>

void begin_critical_section(void);
void end_critical_section(void);

FILE *getFilePointer(void);
enum { BUFFERSIZE = 64 };

void func(FILE *fp) {
    fpos_t pos;
    errno = 0;
    if (0 != fgetpos(fp, &pos)) {
        char errmsg[BUFFERSIZE];
        if (strerror_r(errno, errmsg, BUFFERSIZE) != 0) {
            /* Handle error */
        }
        printf("Could not get the file position: %s\n", errmsg);
    }
}
```

```
void task1(void) {
    FILE* fptr1 = getFilePointer();
    func(fptr1);
}

void task2(void) {
    FILE* fptr2 = getFilePointer();
    func(fptr2);
}

void task3(void) {
    FILE* fptr3 = getFilePointer();
    begin_critical_section();
    func(fptr3);
    end_critical_section();
}
```

One possible correction is to place the call to `strerror` in critical section. You can implement the critical section in multiple ways.

For instance, you can place the call to the intermediate function `func` in the same critical section in the three tasks. When `task1` enters its critical section, the other tasks cannot enter their critical sections until `task1` leaves its critical section. The calls to `func` and therefore the calls to `strerror` from the three tasks cannot interfere with each other.

To implement the critical section, in each of the three tasks, call `func` between calls to `begin_critical_section` and `end_critical_section`.

```
#include <errno.h>
#include <stdio.h>
#include <string.h>

void begin_critical_section(void);
void end_critical_section(void);

FILE *getFilePointer(void);

void func(FILE *fp) {
    fpos_t pos;
    errno = 0;
    if (0 != fgetpos(fp, &pos)) {
```

```

        char *errmsg = strerror(errno);
        printf("Could not get the file position: %s\n", errmsg);
    }
}

void task1(void) {
    FILE* fptr1 = getFilePointer();
    begin_critical_section();
    func(fptr1);
    end_critical_section();
}

void task2(void) {
    FILE* fptr2 = getFilePointer();
    begin_critical_section();
    func(fptr2);
    end_critical_section();
}

void task3(void) {
    FILE* fptr3 = getFilePointer();
    begin_critical_section();
    func(fptr3);
    end_critical_section();
}

```

Another possible correction is to make the tasks, `task1`, `task2` and `task3`, temporally exclusive. Temporally exclusive tasks cannot execute concurrently.

On the **Configuration** pane, specify the following additional options:

Option	Value
<b>Temporally exclusive tasks</b> on page 1-135	task1 task2 task3

On the command-line, you can use the following:

```

polyspace-code-prover-nodesktop
    -temporal-exclusions-file "C:\exclusions_file.txt"

```

where the file `C:\exclusions_file.txt` has the following line:

task1 task2 task3

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** DATA\_RACE\_STD\_LIB

**Impact:** High

**CWE ID:** 366, 413

**CERT C ID:** CON33-C

**CERT C++ ID:** CON33-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Configure multitasking manually | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file)

### Polyspace Results

Data race including atomic operations | Data race | Destruction of locked mutex | Double lock | Double unlock | Missing lock | Missing unlock

## Topics

“Analyze Multitasking Programs in Polyspace”

“Protections for Shared Variables in Multitasking Code”

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2016b

## Deadlock

Call sequence to lock functions cause two tasks to block each other

### Description

**Deadlock** occurs when multiple tasks are stuck in their critical sections (CS) because:

- Each CS waits for another CS to end.
- The critical sections (CS) form a closed cycle. For example:
  - CS #1 waits for CS #2 to end, and CS #2 waits for CS #1 to end.
  - CS #1 waits for CS #2 to end, CS #2 waits for CS #3 to end and CS #3 waits for CS #1 to end.

Polyspace expects critical sections of code to follow a specific format. A critical section lies between a call to a lock function and a call to an unlock function. When a task `my_task` calls a lock function `my_lock`, other tasks calling `my_lock` must wait until `my_task` calls the corresponding unlock function. Both lock and unlock functions must have the form `void func(void)`.

To find this defect, you must specify the multitasking options before analysis. To specify these options, on the **Configuration** pane, select **Multitasking**.

### Examples

#### Deadlock with Two Tasks

```
void task1(void);
void task2(void);

int var;
void perform_task_cycle(void) {
```

```

    var++;
}

void begin_critical_section_1(void);
void end_critical_section_1(void);

void begin_critical_section_2(void);
void end_critical_section_2(void);

void task1() {
    while(1) {
        begin_critical_section_1();
        begin_critical_section_2();
        perform_task_cycle();
        end_critical_section_2();
        end_critical_section_1();
    }
}

void task2() {
    while(1) {
        begin_critical_section_2();
        begin_critical_section_1();
        perform_task_cycle();
        end_critical_section_1();
        end_critical_section_2();
    }
}

```

In this example, to emulate multitasking behavior, you must specify the following options:

Option	Specification	
<b>Configure multitasking manually</b>	<input checked="" type="checkbox"/>	
<b>Entry points</b>	task1 task2	
<b>Critical section details</b>	<b>Starting routine</b>	<b>Ending routine</b>
	begin_critical_section_1	end_critical_section_1
	begin_critical_section_2	end_critical_section_2

A **Deadlock** occurs because the instructions can execute in the following sequence:

- 1 task1 calls `begin_critical_section_1`.
- 2 task2 calls `begin_critical_section_2`.
- 3 task1 reaches the instruction `begin_critical_section_2()`; Since task2 has already called `begin_critical_section_2`, task1 waits for task2 to call `end_critical_section_2`.
- 4 task2 reaches the instruction `begin_critical_section_1()`; Since task1 has already called `begin_critical_section_1`, task2 waits for task1 to call `end_critical_section_1`.

One possible correction is to follow the same sequence of calls to lock and unlock functions in both task1 and task2.

```
void task1(void);
void task2(void);
void perform_task_cycle(void);

void begin_critical_section_1(void);
void end_critical_section_1(void);

void begin_critical_section_2(void);
void end_critical_section_2(void);

void task1() {
    while(1) {
        begin_critical_section_1();
        begin_critical_section_2();
        perform_task_cycle();
        end_critical_section_2();
        end_critical_section_1();
    }
}

void task2() {
    while(1) {
        begin_critical_section_1();
        begin_critical_section_2();
        perform_task_cycle();
    }
}
```

```
    end_critical_section_2();  
    end_critical_section_1();  
}  
}
```

## Deadlock with More Than Two Tasks

```
int var;  
void performTaskCycle() {  
    var++;  
}
```

```
void lock1(void);  
void lock2(void);  
void lock3(void);
```

```
void unlock1(void);  
void unlock2(void);  
void unlock3(void);
```

```
void task1() {  
    while(1) {  
        lock1();  
        lock2();  
        performTaskCycle();  
        unlock2();  
        unlock1();  
    }  
}
```

```
void task2() {  
    while(1) {  
        lock2();  
        lock3();  
        performTaskCycle();  
        unlock3();  
        unlock2();  
    }  
}
```

```
void task3() {
    while(1) {
        lock3();
        lock1();
        performTaskCycle();
        unlock1();
        unlock3();
    }
}
```

In this example, to emulate multitasking behavior, you must specify the following options:

Option	Specification	
<b>Configure multitasking manually</b>	<input checked="" type="checkbox"/>	
<b>Entry points</b>	task1 task2 task3	
<b>Critical section details</b>	<b>Starting routine</b>	<b>Ending routine</b>
	lock1	unlock1
	lock2	unlock2
	lock3	unlock3

A **Deadlock** occurs because the instructions can execute in the following sequence:

- 1 task1 calls lock1.
- 2 task2 calls lock2.
- 3 task3 calls lock3.
- 4 task1 reaches the instruction lock2();. Since task2 has already called lock2, task1 waits for call to unlock2.
- 5 task2 reaches the instruction lock3();. Since task3 has already called lock3, task2 waits for call to unlock3.
- 6 task3 reaches the instruction lock1();. Since task1 has already called lock1, task3 waits for call to unlock1.

To break the cyclic order between critical sections, note every lock function in your code in a certain sequence, for example:

- 1 lock1
- 2 lock2
- 3 lock3

If you use more than one lock function in a task, use them in the order in which they appear in the sequence. For example, you can use lock1 followed by lock2 but not lock2 followed by lock1.

```
int var;
void performTaskCycle() {
    var++;
}
```

```
void lock1(void);
void lock2(void);
void lock3(void);
```

```
void unlock1(void);
void unlock2(void);
void unlock3(void);
```

```
void task1() {
    while(1) {
        lock1();
        lock2();
        performTaskCycle();
        unlock2();
        unlock1();
    }
}
```

```
void task2() {
    while(1) {
        lock2();
        lock3();
        performTaskCycle();
        unlock3();
    }
}
```

```
        unlock2();
    }
}

void task3() {
    while(1) {
        lock1();
        lock3();
        performTaskCycle();
        unlock3();
        unlock1();
    }
}
```

### Check Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** DEADLOCK

**Impact:** High

**CWE ID:** 833

**CERT C ID:** CON35-C, POS51-C

**CERT C++ ID:** CON53-CPP, POS51-C

### See Also

#### Polyspace Analysis Options

Find defects (-checkers) | Configure multitasking manually | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file)

#### Polyspace Results

Data race including atomic operations | Data race | Data race through standard library function call | Destruction of locked mutex | Double lock | Double unlock | Missing lock | Missing unlock

### Topics

“Analyze Multitasking Programs in Polyspace”

“Interpret Polyspace Bug Finder Results”  
“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2014b**

## Dead code

Code does not execute

### Description

**Dead code** occurs when a block of code cannot be reached via any execution path. This defect excludes:

- Code deactivated by constant false condition, which checks for directives such as `#if 0`.
- Unreachable code, which checks for code after a control escape such as `goto`, `break`, or `return`.
- Useless `if`, which checks for `if` statements that are always true.

If you see dead code from use of functions such as `isinf` and `isnan`, enable an analysis mode that takes into account non-finite values. See `Consider non finite floats (-allow-non-finite-floats)`.

### Examples

#### Dead Code from `if`-Statement

```
#include <stdio.h>

int Return_From_Table(int ch){

    int table[5];

    /* Create a table */
    for(int i=0;i<=4;i++){
        table[i]=i^2+i+1;
    }

    if(table[ch]>100){ /* Defect: Condition always false */
        return 0;
    }
}
```

```
    return table[ch];
}
```

The maximum value in the array `table` is  $4^2+4+1=21$ , so the test expression `table[ch]>100` always evaluates to false. The `return 0` in the `if` statement is not executed.

One possible correction is to remove the `if` condition from the code.

```
#include <stdio.h>

int Return_From_Table(int ch){
    int table[5];

    /* Create a table */
    for(int i=0;i<=4;i++){
        table[i]=i^2+i+1;
    }

    return table[ch];
}
```

## Dead Code for `if` with Enumerated Type

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void do_something(suit s);

void bridge(void)
{
    suit card = nextcard();
    if ((card < SPADES) || (card > CLUBS))
        card = UNKNOWN_SUIT;

    if (card > 7) {
        do_something(card);
    }
}
```

The type `suit` is enumerated with five options. However, the conditional expression `card > 7` always evaluates to false because `card` can be at most 5. The content in the `if` statement is not executed.

One possible correction is to change the if-condition in the code. In this correction, the 7 is changed to HEART to relate directly to the type of card.

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void do_something(suit s);

void bridge(void)
{
    suit card = nextcard();
    if ((card < SPADES) || (card > CLUBS))
        card = UNKNOWN_SUIT;

    if (card > HEARTS) {
        do_something(card);
    }
}
```

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** DEAD\_CODE

**Impact:** Low

**CWE ID:** 561

**CERT C ID:** MSC01-C, MSC07-C, MSC12-C

**ISO/IEC TS 17961 ID:** swtchdflt

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Code deactivated by constant false condition | Unreachable code |  
Useless if

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Deallocation of previously deallocated pointer

Memory freed more than once without allocation

### Description

**Deallocation of previously deallocated pointer** occurs when a block of memory is freed more than once using the `free` function without an intermediate allocation.

### Examples

#### Deallocation of Previously Deallocated Pointer Error

```
#include <stdlib.h>

void allocate_and_free(void)
{
    int* pi = (int*)malloc(sizeof(int));
    if (pi == NULL) return;

    *pi = 2;
    free(pi);
    free (pi);
    /* Defect: pi has already been freed */
}
```

The first `free` statement releases the block of memory that `pi` refers to. The second `free` statement on `pi` releases a block of memory that has been freed already.

One possible correction is to remove the second `free` statement.

```
#include <stdlib.h>

void allocate_and_free(void)
```

```
{  
  
    int* pi = (int*)malloc(sizeof(int));  
    if (pi == NULL) return;  
  
    *pi = 2;  
    free(pi);  
    /* Fix: remove second deallocation */  
}
```

## Check Information

**Group:** Dynamic memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** DOUBLE\_DEALLOCATION

**Impact:** High

**CWE ID:** 415, 825

**CERT C ID:** MEM00-C, MEM30-C

**CERT C++ ID:** MEM30-C, MEM50-CPP, MEM51-CPP

**ISO/IEC TS 17961 ID:** accfree, dblfree

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Use of previously freed pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Declaration mismatch

Mismatch between function or variable declarations

### Description

**Declaration mismatch** occurs when a function or variable declaration does not match other instances of the function or variable.

### Examples

#### Inconsistent Declarations in Two Files

*file1.c*

```
int foo(void) {  
    return 1;  
}
```

*file2.c*

```
double foo(void);  
  
int bar(void) {  
    return (int)foo();  
}
```

In this example, *file1.c* declares `foo()` as returning an integer. In *file2.c*, `foo()` is declared as returning a double. This difference raises a defect on the second instance of `foo` in *file2*.

One possible correction is to change the function declarations so that they match. In this example, by changing the declaration of `foo` in *file2.c* to match *file1.c*, the defect is fixed.

*file1.c*

```
int foo(void) {
    return 1;
}
```

*file2.c*

```
int foo(void);

int bar(void) {
    return foo();
}
```

## Inconsistent Structure Alignment

<pre><i>test1.c</i>  #include "square.h" #include "circle.h" struct aCircle circle; struct aSquare square;  int main(){     square.side=1;     circle.radius=1;     return 0; }</pre>	<pre><i>test2.c</i>  #include "circle.h" #include "square.h" struct aCircle circle; struct aSquare square;  int main(){     square.side=1;     circle.radius=1;     return 0; }</pre>
<pre><i>circle.h</i>  #pragma pack(1)  extern struct aCircle{     int radius; } circle;</pre>	<pre><i>square.h</i>  extern struct aSquare {     unsigned int side:1; } square;</pre>

In this example, a declaration mismatch defect is raised on `square` in `square.h` because Polyspace infers that `square.h` does not have the same alignment as `square` in `test2.c`. This error occurs because the `#pragma pack(1)` statement in `circle.h` declares specific alignment. In `test2.c`, `circle.h` is included before `square.h`. Therefore, the `#pragma pack(1)` statement from `circle.h` is not reset to the default alignment after the `aCircle` structure. Because of this omission, `test2.c` infers that the `aSquare square` structure also has an alignment of 1 byte.

One possible correction is to reset the structure alignment after the `aCircle` struct declaration. For the GNU or Microsoft Visual compilers, fix the defect by adding a `#pragma pack()` statement at the end of `circle.h`.

<pre>test1.c #include "square.h" #include "circle.h" struct aCircle circle; struct aSquare square;  int main(){     square.side=1;     circle.radius=1;     return 0; }</pre>	<pre>test2.c #include "circle.h" #include "square.h" struct aCircle circle; struct aSquare square;  int main(){     square.side=1;     circle.radius=1;     return 0; }</pre>
<pre>circle.h #pragma pack(1)  extern struct aCircle{     int radius; } circle;  #pragma pack()</pre>	<pre>square.h extern struct aSquare {     unsigned int side:1; } square;</pre>

Other compilers require different `#pragma pack` syntax. For your syntax, see the documentation for your compiler.

One possible correction is to add the `Ignore pragma pack directives` option to your Bug Finder analysis. If you want the structure alignment to change for each structure, and you do not want to see this **Declaration mismatch** defect, use this correction.

- 1 On the Configuration pane, select the **Advanced Settings** pane.
- 2 In the **Other** box, enter `-ignore-pragma-pack`.
- 3 Rerun your analysis.

The **Declaration mismatch** defect is resolved.

## Check Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** DECL\_MISMATCH

**Impact:** High

**CWE ID:** 685, 686

**CERT C ID:** DCL40-C, EXP37-C, MSC15-C

**CERT C++ ID:** DCL40-C, EXP37-C

**ISO/IEC TS 17961 ID:** argcomp, funcdecl

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Ignore pragma pack directives (-ignore-pragma-pack)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## Introduced in R2013b

## Delete of void pointer

delete operates on a void\* pointer pointing to an object

### Description

**Delete of void pointer** occurs when the delete operator operates on a void\* pointer.

### Risk

Deleting a void\* pointer is undefined according to the C++ Standard.

If the object is of type MyClass and the delete operator operates on a void\* pointer pointing to the object, the MyClass destructor is not called.

If the destructor contains cleanup operations such as release of resources or decreasing a counter value, the operations do not take place.

### Fix

Cast the void\* pointer to the appropriate type. Perform the delete operation on the result of the cast.

For instance, if the void\* pointer points to a MyClass object, cast the pointer to MyClass\*.

## Examples

### Delete of void\* Pointer

```
#include <iostream>

class MyClass {
public:
    explicit MyClass(int i):m_i(i) {}
    ~MyClass() {
```

```

        std::cout << "Delete MyClass(" << m_i << ")" << std::endl;
    }
private:
    int m_i;
};

void my_delete(void* ptr) {
    delete ptr;
}

int main() {
    MyClass* pt = new MyClass(0);
    my_delete(pt);
    return 0;
}

```

In this example, the function `my_delete` is designed to perform the `delete` operation on any type. However, in the function body, the `delete` operation acts on a `void*` pointer, `ptr`. Therefore, when you call `my_delete` with an argument of type `MyClass`, the `MyClass` destructor is not called.

One possible solution is to use a function template instead of a function for `my_delete`.

```

#include <iostream>

class MyClass {
public:
    explicit MyClass(int i):m_i(i) {}
    ~MyClass() {
        std::cout << "Delete MyClass(" << m_i << ")" << std::endl;
    }
private:
    int m_i;
};

template<typename T> void safe_delete(T*& ptr) {
    delete ptr;
    ptr = NULL;
}

int main() {

```

```
    MyClass* pt = new MyClass(0);
    safe_delete(pt);
    return 0;
}
```

### Result Information

**Group:** Good practice

**Language:** C++

**Default:** Off

**Command-Line Syntax:** DELETE\_OF\_VOID\_PTR

**Impact:** Low

### See Also

Find defects (-checkers)

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Destination buffer overflow in string manipulation

Function writes to buffer at offset greater than buffer size

## Description

**Destination buffer overflow in string manipulation** occurs when certain string manipulation functions write to their destination buffer argument at an offset greater than the buffer size.

For instance, when calling the function `sprintf(char* buffer, const char* format)`, you use a constant string format of greater size than buffer.

## Risk

Buffer overflow can cause unexpected behavior such as memory corruption or stopping your system. Buffer overflow also introduces the risk of code injection.

## Fix

One possible solution is to use alternative functions to constrain the number of characters written. For instance:

- If you use `sprintf` to write formatted data to a string, use `snprintf`, `_snprintf` or `sprintf_s` instead to enforce length control. Alternatively, use `asprintf` to automatically allocate the memory required for the destination buffer.
- If you use `vsprintf` to write formatted data from a variable argument list to a string, use `vsprintf` or `vsprintf_s` instead to enforce length control.
- If you use `wcscpy` to copy a wide string, use `wcsncpy`, `wcsncpy`, or `wcscpy_s` instead to enforce length control.

Another possible solution is to increase the buffer size.

## Examples

### Buffer Overflow in sprintf Use

```
#include <stdio.h>

void func(void) {
    char buffer[20];
    char *fmt_string = "This is a very long string, it does not fit in the buffer";

    sprintf(buffer, fmt_string);
}
```

In this example, `buffer` can contain 20 char elements but `fmt_string` has a greater size.

One possible correction is to use the `snprintf` function to enforce length control.

```
#include <stdio.h>

void func(void) {
    char buffer[20];
    char *fmt_string = "This is a very long string, it does not fit in the buffer";

    snprintf(buffer, 20, fmt_string);
}
```

## Result Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** STRLIB\_BUFFER\_OVERFLOW

**Impact:** High

**CWE ID:** 121, 125, 135, 251, 787

**CERT C ID:** ARR38-C, STR07-C, STR31-C, STR38-C, ENV01-C

**CERT C++ ID:** ARR38-C, STR31-C, STR38-C, STR50-CPP

**ISO/IEC TS 17961 ID:** libptr, taintformatio

## See Also

### **Polyspace Analysis Options**

Find defects (-checkers)

### **Polyspace Results**

Destination buffer underflow in string manipulation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### **Introduced in R2015b**

## Destination buffer underflow in string manipulation

Function writes to buffer at a negative offset from beginning of buffer

### Description

**Destination buffer underflow in string manipulation** occurs when certain string manipulation functions write to their destination buffer argument at a negative offset from the beginning of the buffer.

For instance, for the function `sprintf(char* buffer, const char* format)`, you obtain the buffer from an operation `buffer = (char*)arr; ... buffer += offset;`. `arr` is an array and `offset` is a negative value.

### Risk

Buffer underflow can cause unexpected behavior such as memory corruption or stopping your system. Buffer underflow also introduces the risk of code injection.

### Fix

If the destination buffer argument results from pointer arithmetic, see if you are decrementing a pointer. Fix the pointer decrement by modifying either the original value before decrement or the decrement value.

## Examples

### Buffer Underflow in sprintf Use

```
#include <stdio.h>
#define offset -2

void func(void) {
```

```
    char buffer[20];
    char *fmt_string ="Text";

    sprintf(&buffer[offset], fmt_string);
}
```

In this example, `&buffer[offset]` is at a negative offset from the memory allocated to `buffer`.

One possible correction is to change the value of `offset`.

```
#include <stdio.h>
#define offset 2

void func(void) {
    char buffer[20];
    char *fmt_string ="Text";

    sprintf(&buffer[offset], fmt_string);
}
```

## Result Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** STRLIB\_BUFFER\_UNDERFLOW

**Impact:** High

**CWE ID:** 124, 786, 787

**CERT C ID:** ARR38-C

**CERT C++ ID:** ARR38-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Destination buffer overflow in string manipulation

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Destruction of locked mutex

Task tries to destroy a mutex in the locked state

## Description

**Destruction of locked mutex** occurs when a task destroys a mutex after it is locked (and before it is unlocked). The locking and destruction can happen in the same task or different tasks.

## Risk

A mutex is locked to protect shared variables from concurrent access. If a mutex is destroyed in the locked state, the protection does not apply.

## Fix

To fix this defect, destroy the mutex only after you unlock it. It is a good design practice to:

- Initialize a mutex *before* creating the threads where you use the mutex.
- Destroy a mutex *after* joining the threads that you created.

On the **Result Details** pane, you see two events, the locking and destruction of the mutex, and the tasks that initiated the events. To navigate to the corresponding line in your source code, click the event.

## Examples

### Locking and Destruction in Different Tasks

```
#include <pthread.h>
```

```
pthread_mutex_t lock1;
pthread_mutex_t lock2;
pthread_mutex_t lock3;

void t0 (void) {
    pthread_mutex_lock (&lock1);
    pthread_mutex_lock (&lock2);
    pthread_mutex_lock (&lock3);
    pthread_mutex_unlock (&lock2);
    pthread_mutex_unlock (&lock1);
    pthread_mutex_unlock (&lock3);
}

void t1 (void) {
    pthread_mutex_lock (&lock1);
    pthread_mutex_lock (&lock2);
    pthread_mutex_destroy (&lock3);
    pthread_mutex_unlock (&lock2);
    pthread_mutex_unlock (&lock1);
}
```

In this example, after task `t0` locks the mutex `lock3`, task `t1` can destroy it. The destruction occurs if the following events happen in sequence:

- 1** `t0` acquires `lock3`.
- 2** `t0` releases `lock2`.
- 3** `t0` releases `lock1`.
- 4** `t1` acquires the lock `lock1` released by `t0`.
- 5** `t1` acquires the lock `lock2` released by `t0`.
- 6** `t1` destroys `lock3`.

For simplicity, this example uses a mix of automatic and manual concurrency detection. The tasks `t0` and `t1` are manually specified as entry points by using the option `Tasks (-entry-points)`. The critical sections are implemented through primitives `pthread_mutex_lock` and `pthread_mutex_unlock` that the software detects automatically. In practice, for entry point specification (thread creation), you will use primitives such as `pthread_create`. The next example shows how the defect can appear when you use `pthread_create`.

The locking and destruction of `lock3` occurs inside the critical section imposed by `lock1` and `lock2`, but the unlocking occurs outside. One possible correction is to place the lock-unlock pair in the same critical section as the destruction of the mutex. Use one of these critical sections:

- Critical section imposed by `lock1` alone.
- Critical section imposed by `lock1` and `lock2`.

In this corrected code, the lock-unlock pair and the destruction is placed in the critical section imposed by `lock1` and `lock2`. When `t0` acquires `lock1` and `lock2`, `t1` has to wait for their release before it executes the instruction `pthread_mutex_destroy (&lock3);`. Therefore, `t1` cannot destroy mutex `lock3` in the locked state.

```
#include <pthread.h>

pthread_mutex_t lock1;
pthread_mutex_t lock2;
pthread_mutex_t lock3;

void t0 (void) {
    pthread_mutex_lock (&lock1);
    pthread_mutex_lock (&lock2);

    pthread_mutex_lock (&lock3);
    pthread_mutex_unlock (&lock3);

    pthread_mutex_unlock (&lock2);
    pthread_mutex_unlock (&lock1);
}

void t1 (void) {
    pthread_mutex_lock (&lock1);
    pthread_mutex_lock (&lock2);

    pthread_mutex_destroy (&lock3);

    pthread_mutex_unlock (&lock2);
    pthread_mutex_unlock (&lock1);
}
```

## Locking and Destruction in Start Routine of Thread

```
#include <pthread.h>

/* Define globally accessible variables and a mutex */
#define NUMTHREADS 4
pthread_t callThd[NUMTHREADS];
pthread_mutex_t lock;
void atomic_operation(void);

void *do_create(void *arg) {
    /* Creation thread */
    pthread_mutex_init(&lock, NULL);
    pthread_exit((void*) 0);
}

void *do_work(void *arg) {
    /* Worker thread */
    pthread_mutex_lock (&lock);
    atomic_operation();
    pthread_mutex_unlock (&lock);
    pthread_exit((void*) 0);
}

void *do_destroy(void *arg) {
    /* Destruction thread */
    pthread_mutex_destroy(&lock);
    pthread_exit((void*) 0);
}

int main (int argc, char *argv[]) {
    int i;
    void *status;
    pthread_attr_t attr;

    /* Create threads */
    pthread_attr_init(&attr);
    pthread_attr_setdetachstate(&attr, PTHREAD_CREATE_JOINABLE);

    /* Thread that initializes mutex */
    pthread_create(&callThd[0], &attr, do_create, NULL);

    /* Threads that use mutex for atomic operation*/
```

```

for(i=0; i<NUMTHREADS-1; i++) {
    pthread_create(&callThd[i], &attr, do_work, (void *)i);
}

/* Thread that destroys mutex */
pthread_create(&callThd[NUMTHREADS -1], &attr, do_destroy, NULL);

pthread_attr_destroy(&attr);

/* Join threads */
for(i=0; i<NUMTHREADS; i++) {
    pthread_join(callThd[i], &status);
}

pthread_exit(NULL);
}

```

In this example, four threads are created. The threads are assigned different actions.

- The first thread `callThd[0]` initializes the mutex lock.
- The second and third threads, `callThd[1]` and `callThd[2]`, perform an atomic operation protected by the mutex lock.
- The fourth thread `callThd[3]` destroys the mutex lock.

The threads can interrupt each other. Therefore, immediately after the second or third thread locks the mutex, the fourth thread can destroy it.

One possible correction is to initialize and destroy the mutex in the `main` function outside the start routine of the threads. The threads perform only the atomic operation. You need two fewer threads because the mutex initialization and destruction threads are not required.

```

#include <pthread.h>

/* Define globally accessible variables and a mutex */
#define NUMTHREADS 2
pthread_t callThd[NUMTHREADS];
pthread_mutex_t lock;
void atomic_operation(void);

void *do_work(void *arg) {
    pthread_mutex_lock (&lock);
}

```

```
    atomic_operation();
    pthread_mutex_unlock (&lock);
    pthread_exit((void*) 0);
}

int main (int argc, char *argv[]) {
    int i;
    void *status;
    pthread_attr_t attr;

    /* Create threads */
    pthread_attr_init(&attr);
    pthread_attr_setdetachstate(&attr, PTHREAD_CREATE_JOINABLE);

    /* Initialize mutex */
    pthread_mutex_init(&lock, NULL);

    for(i=0; i<NUMTHREADS; i++) {
        pthread_create(&callThd[i], &attr, do_work, (void *)i);
    }

    pthread_attr_destroy(&attr);

    /* Join threads */
    for(i=0; i<NUMTHREADS; i++) {
        pthread_join(callThd[i], &status);
    }

    /* Destroy mutex */
    pthread_mutex_destroy(&lock);

    pthread_exit(NULL);
}
```

Another possible correction is to use a second mutex and protect the lock-unlock pair from the destruction. This corrected code uses the mutex `lock2` to achieve this protection. The second mutex is initialized in the main function outside the start routine of the threads.

```
#include <pthread.h>

/* Define globally accessible variables and a mutex */
#define NUMTHREADS 4
```

```
pthread_t callThd[NUMTHREADS];
pthread_mutex_t lock;
pthread_mutex_t lock2;
void atomic_operation(void);

void *do_create(void *arg) {
    /* Creation thread */
    pthread_mutex_init(&lock, NULL);
    pthread_exit((void*) 0);
}

void *do_work(void *arg) {
    /* Worker thread */
    pthread_mutex_lock (&lock2);
    pthread_mutex_lock (&lock);
    atomic_operation();
    pthread_mutex_unlock (&lock);
    pthread_mutex_unlock (&lock2);
    pthread_exit((void*) 0);
}

void *do_destroy(void *arg) {
    /* Destruction thread */
    pthread_mutex_lock (&lock2);
    pthread_mutex_destroy(&lock);
    pthread_mutex_unlock (&lock2);
    pthread_exit((void*) 0);
}

int main (int argc, char *argv[]) {
    int i;
    void *status;
    pthread_attr_t attr;

    /* Create threads */
    pthread_attr_init(&attr);
    pthread_attr_setdetachstate(&attr, PTHREAD_CREATE_JOINABLE);

    /* Initialize second mutex */
    pthread_mutex_init(&lock2, NULL);

    /* Thread that initializes first mutex */
```

```
pthread_create(&callThd[0], &attr, do_create, NULL);

/* Threads that use first mutex for atomic operation */
/* The threads use second mutex to protect first from destruction in locked state*/
for(i=0; i<NUMTHREADS-1; i++) {
    pthread_create(&callThd[i], &attr, do_work, (void *)i);
}

/* Thread that destroys first mutex */
/* The thread uses the second mutex to prevent destruction of locked mutex */
pthread_create(&callThd[NUMTHREADS -1], &attr, do_destroy, NULL);

pthread_attr_destroy(&attr);

/* Join threads */
for(i=0; i<NUMTHREADS; i++) {
    pthread_join(callThd[i], &status);
}

/* Destroy second mutex */
pthread_mutex_destroy(&lock2);

pthread_exit(NULL);
}
```

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** DESTROY\_LOCKED

**Impact:** Medium

**CWE ID:** 667, 826

**CERT C ID:** CON31-C, POS48-C

**CERT C++ ID:** CON50-CPP, POS48-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Target processor type (-target) | Configure multitasking manually | Tasks (-entry-points)

### Polyspace Results

Data race including atomic operations | Data race | Data race through standard library function call | Deadlock | Double lock | Double unlock | Missing lock | Missing unlock

## Topics

“Analyze Multitasking Programs in Polyspace”

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2016b

## Deterministic random output from constant seed

Seeding routine uses a constant seed making the output deterministic

### Description

**Deterministic random output from constant seed** detects random standard functions that when given a constant seed, have deterministic output.

### Risk

When some random functions, such as `srand`, `srandom`, and `initstate`, have constant seeds, the results produce the same output every time that your program is run. A hacker can disrupt your program if they know how your program behaves.

### Fix

Use a different random standard function or use a nonconstant seed.

Some standard random routines are inherently cryptographically weak on page 3-817, and should not be used for security purposes.

## Examples

### Random Number Generator Initialization

```
#include <stdlib.h>

void random_num(void)
{
    srand(12345U);
    /* ... */
}
```

This example initializes a random number generator using `srand` with a constant seed. The random number generation is deterministic, making this function cryptographically weak.

One possible correction is to use a random number generator that does not require a seed. This example uses `rand_s`.

```
#define _CRT_RAND_S
#include <stdlib.h>
#include <stdio.h>

unsigned int random_num_time(void)
{
    unsigned int number;
    errno_t err;
    err = rand_s(&number);

    if(err != 0)
    {
        return number;
    }
    else
    {
        return err;
    }
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** RAND\_SEED\_CONSTANT

**Impact:** Medium

**CWE ID:** 330, 336

**CERT C ID:** MSC32-C

**CERT C++ ID:** MSC32-C, MSC51-CPP

## **See Also**

Predictable random output from predictable seed | Unsafe standard encryption function | Vulnerable pseudo-random number generator

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Double lock

Lock function is called twice in a task without an intermediate call to unlock function

## Description

**Double lock** occurs when:

- A task calls a lock function `my_lock`.
- The task calls `my_lock` again before calling the corresponding unlock function.

In multitasking code, a lock function begins a critical section of code and an unlock function ends it. When a task `task1` calls a lock function `lock`, other tasks calling `lock` must wait until `task` calls the corresponding unlock function. Polyspace requires that both lock and unlock functions must have the form `void func(void)`.

To find this defect, you must specify the multitasking options before analysis. To specify these options, on the **Configuration** pane, select **Multitasking**.

## Examples

### Double Lock

```
int global_var;

void lock(void);
void unlock(void);

void task1(void)
{
    lock();
    global_var += 1;
    lock();
    global_var += 1;
}
```

```

    unlock();
}

void task2(void)
{
    lock();
    global_var += 1;
    unlock();
}

```

In this example, to emulate multitasking behavior, you must specify the following options:

Option	Value	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	task1 task2	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	lock	unlock

On the command-line, you can use the following:

```

polyspace-bug-finder-nodesktop
-entry-points task1,task2
-critical-section-begin lock:cs1
-critical-section-end unlock:cs1

```

task1 enters a critical section through the call `lock()`; task1 calls `lock` again before it leaves the critical section through the call `unlock()`;

If you want the first `global_var+=1;` to be outside the critical section, one possible correction is to remove the first call to `lock`. However, if other tasks are using `global_var`, this code can produce a Data race error.

```

int global_var;

void lock(void);

```

```
void unlock(void);

void task1(void)
{
    global_var += 1;
    lock();
    global_var += 1;
    unlock();
}

void task2(void)
{
    lock();
    global_var += 1;
    unlock();
}
```

If you want the first `global_var+=1;` to be inside the critical section, one possible correction is to remove the second call to `lock`.

```
int global_var;

void lock(void);
void unlock(void);

void task1(void)
{
    lock();
    global_var += 1;
    global_var += 1;
    unlock();
}

void task2(void)
{
    lock();
    global_var += 1;
    unlock();
}
```

If you want the second `global_var+=1;` to be inside a critical section, another possible correction is to add another call to `unlock`.

```
int global_var;

void lock(void);
void unlock(void);

void task1(void)
{
    lock();
    global_var += 1;
    unlock();
    lock();
    global_var += 1;
    unlock();
}

void task2(void)
{
    lock();
    global_var += 1;
    unlock();
}
```

### **Double Lock with Function Call**

```
int global_var;

void lock(void);
void unlock(void);

void performOperation(void) {
    lock();
    global_var++;
}
```

```

void task1(void)
{
    lock();
    global_var += 1;
    performOperation();
    unlock();
}

void task2(void)
{
    lock();
    global_var += 1;
    unlock();
}

```

In this example, to emulate multitasking behavior, you must specify the following options:

Option	Specification	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	task1 task2	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	lock	unlock

On the command-line, you can use the following:

```

polyspace-bug-finder-nodesktop
-entry-points task1,task2
-critical-section-begin lock:cs1
-critical-section-end unlock:cs1

```

task1 enters a critical section through the call `lock()`; task1 calls the function `performOperation`. In `performOperation`, `lock` is called again even though task1 has not left the critical section through the call `unlock()`;

In the result details for the defect, you see the sequence of instructions leading to the defect. For instance, you see that following the first entry into the critical section, the execution path:

- Enters function `performOperation`.
- Inside `performOperation`, attempts to enter the same critical section once again.

 <b>Double lock</b> (Impact: High)  Task is waiting for already acquired resource.				
	Event	File	Scope	Line
1	Entering task 'task1'	myFile.c	performOperation()	11
2	<b>'task1' enters critical section</b> Lock function: 'lock'	myFile.c	task1()	13
3	Entering function 'performOperation'	myFile.c	task1()	15
4	<b>'task1' attempts to enter same critical section.</b>	myFile.c	performOperation()	7
5	 Double lock	myFile.c	File Scope	7

You can click each event to navigate to the corresponding line in the source code.

One possible correction is to remove the call to `lock` in `task1`.

```
int global_var;

void lock(void);
void unlock(void);

void performOperation(void) {
    global_var++;
}

void task1(void)
{
    lock();
    global_var += 1;
    performOperation();
    unlock();
}

void task2(void)
{
    lock();
```

```
    global_var += 1;
    unlock();
}
```

## Check Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** DOUBLE\_LOCK

**Impact:** High

**CWE ID:** 764

**CERT C ID:** CON01-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Configure multitasking manually | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file)

### Polyspace Results

Data race including atomic operations | Data race | Data race through standard library function call | Deadlock | Destruction of locked mutex | Double unlock | Missing lock | Missing unlock

## Topics

“Analyze Multitasking Programs in Polyspace”

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2014b

## Double unlock

Unlock function is called twice in a task without an intermediate call to lock function

### Description

**Double unlock** occurs when:

- A task calls a lock function `my_lock`.
- The task calls the corresponding unlock function `my_unlock`.
- The task calls `my_unlock` again. The task does not call `my_lock` a second time between the two calls to `my_unlock`.

In multitasking code, a lock function begins a critical section of code and an unlock function ends it. When a task `task1` calls a lock function `my_lock`, other tasks calling `my_lock` must wait until `task1` calls the corresponding unlock function. Polyspace requires that both lock and unlock functions must have the form `void func(void)`.

To find this defect, you must specify the multitasking options before analysis. To specify these options, on the **Configuration** pane, select **Multitasking**.

### Examples

#### Double Unlock

```
int global_var;

void BEGIN_CRITICAL_SECTION(void);
void END_CRITICAL_SECTION(void);

void task1(void)
{
    BEGIN_CRITICAL_SECTION();
    global_var += 1;
}
```

```

    END_CRITICAL_SECTION();
    global_var += 1;
    END_CRITICAL_SECTION();
}

void task2(void)
{
    BEGIN_CRITICAL_SECTION();
    global_var += 1;
    END_CRITICAL_SECTION();
}

```

In this example, to emulate multitasking behavior, you must specify the following options:

Option	Value	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	task1 task2	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	BEGIN_CRITICAL_SECTION	END_CRITICAL_SECTION

On the command-line, you can use the following:

```

polyspace-bug-finder-nodesktop
  -entry-points task1,task2
  -critical-section-begin BEGIN_CRITICAL_SECTION:cs1
  -critical-section-end END_CRITICAL_SECTION:cs1

```

task1 enters a critical section through the call `BEGIN_CRITICAL_SECTION()`; task1 leaves the critical section through the call `END_CRITICAL_SECTION()`; task1 calls `END_CRITICAL_SECTION` again without an intermediate call to `BEGIN_CRITICAL_SECTION`.

If you want the second `global_var+=1;` to be outside the critical section, one possible correction is to remove the second call to `END_CRITICAL_SECTION`. However, if other tasks are using `global_var`, this code can produce a Data race error.

```
int global_var;

void BEGIN_CRITICAL_SECTION(void);
void END_CRITICAL_SECTION(void);

void task1(void)
{
    BEGIN_CRITICAL_SECTION();
    global_var += 1;
    END_CRITICAL_SECTION();
    global_var += 1;
}

void task2(void)
{
    BEGIN_CRITICAL_SECTION();
    global_var += 1;
    END_CRITICAL_SECTION();
}
```

If you want the second `global_var+=1;` to be inside the critical section, one possible correction is to remove the first call to `END_CRITICAL_SECTION`.

```
int global_var;

void BEGIN_CRITICAL_SECTION(void);
void END_CRITICAL_SECTION(void);

void task1(void)
{
    BEGIN_CRITICAL_SECTION();
    global_var += 1;
    global_var += 1;
    END_CRITICAL_SECTION();
}

void task2(void)
{
```

```
BEGIN_CRITICAL_SECTION();
global_var += 1;
END_CRITICAL_SECTION();
}
```

If you want the second `global_var+=1;` to be inside a critical section, another possible correction is to add another call to `BEGIN_CRITICAL_SECTION`.

```
int global_var;

void BEGIN_CRITICAL_SECTION(void);
void END_CRITICAL_SECTION(void);

void task1(void)
{
    BEGIN_CRITICAL_SECTION();
    global_var += 1;
    END_CRITICAL_SECTION();
    BEGIN_CRITICAL_SECTION();
    global_var += 1;
    END_CRITICAL_SECTION();
}

void task2(void)
{
    BEGIN_CRITICAL_SECTION();
    global_var += 1;
    END_CRITICAL_SECTION();
}
```

## Check Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** DOUBLE\_UNLOCK

**Impact:** High

**CWE ID:** 765

**CERT C ID:** CON01-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Configure multitasking manually | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file)

### Polyspace Results

Data race including atomic operations | Data race | Data race through standard library function call | Deadlock | Destruction of locked mutex | Double lock | Missing lock | Missing unlock

### Topics

“Analyze Multitasking Programs in Polyspace”

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2014b

# Environment pointer invalidated by previous operation

Call to `setenv` or `putenv` family function modifies environment pointed to by pointer

## Description

**Environment pointer invalidated by previous operation** occurs when you use the third argument of `main()` in a hosted environment to access the environment after an operation modifies the environment. In a hosted environment, many C implementations support the nonstandard syntax:

```
main (int argc, char *argv[], char *envp[])
```

A call to a `setenv` or `putenv` family function modifies the environment pointed to by `*envp`.

## Risk

When you modify the environment through a call to a `setenv` or `putenv` family function, the environment memory can potentially be reallocated. The hosted environment pointer is not updated and might point to an incorrect location. A call to this pointer can return unexpected results or cause an abnormal program termination.

## Fix

Do not use the hosted environment pointer. Instead, use global external variable `environ` in Linux, `_environ` or `_wenviron` in Windows, or their equivalent. When you modify the environment, these variables are updated.

## Examples

### Access Environment Through Pointer `envp`

```
#include <stdio.h>  
#include <stdlib.h>
```

```
extern int check_arguments(int argc, char **argv, char **envp);
extern void use_envp(char **envp);

/* envp is from main function */
int func(char **envp)
{
    /* Call to setenv may cause environment
    *memory to be reallocated
    */
    if (setenv(("MY_NEW_VAR"),("new_value"),1) != 0)
    {
        /* Handle error */
        return -1;
    }
    /* envp not updated after call to setenv, and may
    *point to incorrect location.
    */
    if (envp != ((void *)0)) {
        use_envp(envp);
    }
    /* No defect on second access to
    *envp because defect already raised */
    return 0;
}

void main(int argc, char **argv, char **envp)
{
    if (check_arguments(argc, argv, envp))
    {
        (void)func(envp);
    }
}
```

In this example, `envp` is accessed inside `func()` after a call to `setenv` that can reallocate the environment memory. `envp` can point to an incorrect location because it is not updated after `setenv` modifies the environment. No defect is raised when `use_envp()` is called because the defect is already raised on the previous line of code.

One possible correction is to access the environment by using a variable that is always updated after a call to `setenv`. For instance, in the following code, the pointer `envp` is still available from `main()`, but the environment is accessed in `func()` through the global external variable `environ`.

```
#include <stdio.h>
#include <stdlib.h>
extern char **environ;

extern int check_arguments(int argc, char **argv, char **envp);
extern void use_envp(char **envp);

int func(void)
{
    if (setenv(("MY_NEW_VAR"), ("new_value"),1) != 0) {
        /* Handle error */
        return -1;
    }
    /* Use global external variable environ
    *which is always updated after a call to setenv */

    if (environ != NULL) {
        use_envp(environ);
    }
    return 0;
}

void main(int argc, char **argv, char **envp)
{
    if (check_arguments(argc, argv, envp))
    {
        (void)func();
    }
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** INVALID\_ENV\_POINTER

**Impact:** Medium

**CWE ID:** 825

**CERT C ID:** ENV31-C

**CERT C++ ID:** ENV31-C

## **See Also**

### **Topics**

Misuse of return value from nonreentrant standard function

Modification of internal buffer returned from nonreentrant standard function

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

# Errno not checked

`errno` is not checked for error conditions following function call

## Description

**Errno not checked** occurs when you call a function that sets `errno` to indicate error conditions, but do not check `errno` after the call. For these functions, checking `errno` is the only reliable way to determine if an error occurred.

Functions that set `errno` on errors include:

- `fgetwc`, `strtol`, and `wcstol`.

For a comprehensive list of functions, see documentation about `errno`.

- POSIX `errno`-setting functions such as `encrypt` and `setkey`.

## Risk

To see if the function call completed without errors, check `errno` for error values.

The return values of these `errno`-setting functions do not indicate errors. The return value can be one of the following:

- `void`
- Even if an error occurs, the return value can be the same as the value from a successful call. Such return values are called in-band error indicators.

You can determine if an error occurred only by checking `errno`.

For instance, `strtol` converts a string to a long integer and returns the integer. If the result of conversion overflows, the function returns `LONG_MAX` and sets `errno` to `ERANGE`. However, the function can also return `LONG_MAX` from a successful conversion. Only by checking `errno` can you distinguish between an error and a successful conversion.

## Fix

Before calling the function, set `errno` to zero.

After the function call, to see if an error occurred, compare `errno` to zero. Alternatively, compare `errno` to known error indicator values. For instance, `strtol` sets `errno` to `ERANGE` to indicate errors.

The error message in the Polyspace result shows the error indicator value that you can compare to.

## Examples

### **errno Not Checked After Call to `strtol`**

```
#include<stdio.h>
#include<stdlib.h>
#include<errno.h>

int main(int argc, char *argv[]) {
    char *str, *endptr;
    int base;

    str = argv[1];
    base = 10;

    long val = strtol(str, &endptr, base);
    printf("Return value of strtol() = %ld\n", val);
}
```

You are using the return value of `strtol` without checking `errno`.

Before calling `strtol`, set `errno` to zero. After a call to `strtol`, check the return value for `LONG_MIN` or `LONG_MAX` and `errno` for `ERANGE`.

```
#include<stdlib.h>
#include<stdio.h>
#include<errno.h>
#include<limits.h>

int main(int argc, char *argv[]) {
    char *str, *endptr;
    int base;

    str = argv[1];
```

```
base = 10;

errno = 0;
long val = strtol(str, &endptr, base);
if((val == LONG_MIN || val == LONG_MAX) && errno == ERANGE) {
    printf("strtol error");
    exit(EXIT_FAILURE);
}
printf("Return value of strtol() = %ld\n", val);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** ERRNO\_NOT\_CHECKED

**Impact:** Medium

**CWE ID:** 253, 391

**CERT C ID:** ERR33-C

**CERT C++ ID:** ERR33-C

**ISO/IEC TS 17961 ID:** inverrno

## See Also

### Polyspace Results

Errno not reset | Misuse of errno | Returned value of a sensitive function not checked

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Errno not reset

errno not reset before calling a function that sets errno

### Description

**Errno not reset** occurs when you do not reset `errno` before calling a function that sets `errno` to indicate error conditions. However, you check `errno` for those error conditions after the function call.

### Risk

The `errno` is not clean and can contain values from a previous call. Checking `errno` for errors can give the false impression that an error occurred.

`errno` is set to zero at program startup but subsequently, `errno` is not reset by a C standard library function. You must explicitly set `errno` to zero when required.

### Fix

Before calling a function that sets `errno` to indicate error conditions, reset `errno` to zero explicitly.

## Examples

### errno Not Reset Before Call to strtod

```
#include <stdio.h>
#include <stdlib.h>
#include <errno.h>
#include <float.h>

#define fatal_error() abort()

double func(const char *s1, const char *s2)
{
```

```

double f1;
f1 = strtod (s1, NULL);
if (0 == errno) {
    double f2 = strtod (s2, NULL);
    if (0 == errno) {
        long double result = (long double)f1 + f2;
        if ((result <= (long double)DBL_MAX) && (result >= (long double)-DBL_MAX))
            {
                return (double)result;
            }
    }
}
fatal_error();
return 0.0;
}

```

In this example, `errno` is not reset to 0 before the first call to `strtod`. Checking `errno` for 0 later can lead to a false positive.

One possible correction is to reset `errno` to 0 before calling `strtod`.

```

#include <stdio.h>
#include <stdlib.h>
#include <errno.h>
#include <float.h>

#define fatal_error() abort()

double func(const char *s1, const char *s2)
{
    double f1;
    errno = 0;
    f1 = strtod (s1, NULL);
    if (0 == errno) {
        double f2 = strtod (s2, NULL);
        if (0 == errno) {
            long double result = (long double)f1 + f2;
            if ((result <= (long double)DBL_MAX) && (result >= (long double)-DBL_MAX))
                {
                    return (double)result;
                }
        }
    }
}
fatal_error();

```

```
    return 0.0;  
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** MISSING\_ERRNO\_RESET

**Impact:** High

**CWE ID:** 253, 456, 703

**CERT C ID:** ERR30-C

**CERT C++ ID:** ERR30-C

**ISO/IEC TS 17961 ID:** invernno

## See Also

### Polyspace Results

Errno not reset | Errno not checked | Returned value of a sensitive function not checked

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2017a

# Exception caught by value

catch statement accepts an object by value

## Description

**Exception caught by value** occurs when a catch statement accepts an object by value.

## Risk

If a throw statement passes an object and the corresponding catch statement accepts the exception by value, the object is copied to the catch statement parameter. This copy can lead to unexpected behavior such as:

- Object slicing, if the throw statement passes a derived class object.
- Undefined behavior of the exception, if the copy fails.

## Fix

Catch the exception by reference or by pointer. Catching an exception by reference is recommended.

## Examples

### Standard Exception Caught by Value

```
#include <exception>

extern void print_str(const char* p);
extern void throw_exception();

void func() {
    try {
        throw_exception();
    }
}
```

```
        catch(std::exception exc) {
            print_str(exc.what());
        }
    }
```

In this example, the `catch` statement takes a `std::exception` object by value. Catching an exception by value causes copying of the object. It can cause undefined behavior of the exception if the copy fails.

One possible solution is to catch the exception by reference.

```
#include <exception>

extern void print_str(const char* p);
extern void throw_exception();

void corrected_excpcoughtbyvalue() {
    try {
        throw_exception();
    }
    catch(std::exception& exc) {
        print_str(exc.what());
    }
}
```

## Derived Class Exception Caught by Value

```
#include <exception>
#include <string>
#include <typeinfo>
#include <iostream>

// Class declarations
class BaseExc {
public:
    explicit BaseExc();
    virtual ~BaseExc() {};
protected:
    BaseExc(const std::string& type);
private:
    std::string _id;
};
```

```
class IOExc: public BaseExc {
public:
    explicit IOExc();
};

//Class method declarations
BaseExc::BaseExc():_id(typeid(this).name()) {
}
BaseExc::BaseExc(const std::string& type): _id(type) {
}
IOExc::IOExc(): BaseExc(typeid(this).name()) {
}

int input(void);

int main(void) {
    int rnd = input();
    try {
        if (rnd==0) {
            throw IOExc();
        } else {
            throw BaseExc();
        }
    }

    catch(BaseExc exc) {
        std::cout << "Intercept BaseExc" << std::endl;
    }
    return 0;
}
```

In this example, the catch statement takes a `BaseExc` object by value. Catching exceptions by value causes copying of the object. The copying can cause:

- Undefined behavior of the exception if it fails.
- Object slicing if an exception of the derived class `IOExc` is caught.

One possible correction is to catch exceptions by reference.

```
#include <exception>
#include <string>
```

```
#include <typeinfo>
#include <iostream>

// Class declarations
class BaseExc {
public:
    explicit BaseExc();
    virtual ~BaseExc() {};
protected:
    BaseExc(const std::string& type);
private:
    std::string _id;
};

class IOExc: public BaseExc {
public:
    explicit IOExc();
};

//Class method declarations
BaseExc::BaseExc():_id(typeid(this).name()) {
}
BaseExc::BaseExc(const std::string& type): _id(type) {
}
IOExc::IOExc(): BaseExc(typeid(this).name()) {
}

int input(void);

int main(void) {
    int rnd = input();
    try {
        if (rnd==0) {
            throw IOExc();
        } else {
            throw BaseExc();
        }
    }

    catch(BaseExc& exc) {
        std::cout << "Intercept BaseExc" << std::endl;
    }
}
```

```
    return 0;  
}
```

## Result Information

**Group:** Programming

**Language:** C++

**Default:** On

**Command-Line Syntax:** EXCP\_CAUGHT\_BY\_VALUE

**Impact:** Medium

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Exception handler hidden by previous handler

catch statement is not reached because of an earlier catch statement for the same exception

### Description

**Exception handler hidden by previous handler** occurs when a catch statement is not reached because a previous catch statement handles the exception.

For instance, a catch statement accepts an object of a class `my_exception` and a later catch statement accepts one of the following:

- An object of the `my_exception` class.
- An object of a class derived from the `my_exception` class.

### Risk

Because the catch statement is not reached, it is effectively dead code.

### Fix

One possible fix is to remove the redundant catch statement.

Another possible fix is to reverse the order of catch statements. Place the catch statement that accepts the derived class exception before the catch statement that accepts the base class exception.

## Examples

### catch Statement Hidden by Previous Statement

```
#include <new>
```

```
extern void print_str(const char* p);
extern void throw_exception();

void func() {
    try {
        throw_exception();
    }
    catch(std::exception& exc) {
        print_str(exc.what());
    }

    catch(std::bad_alloc& exc) {
        print_str(exc.what());
    }
}
```

In this example, the second catch statement accepts a `std::bad_alloc` object. Because the `std::bad_alloc` class is derived from a `std::exception` class, the second catch statement is hidden by the previous catch statement that accepts a `std::exception` object.

The defect appears on the parameter type of the catch statement. To find which catch statement hides the current catch statement:

- 1 On the **Source** pane, right-click the keyword `catch` and select **Search For "catch" in Current Source File**.
- 2 On the **Search** pane, click each search result, proceeding backwards from the current catch statement. Continue until you find the catch statement that hides the catch statement with the defect.

One possible correction is to place the catch statement with the derived class parameter first.

```
#include <new>

extern void print_str(const char* p);
extern void throw_exception();

void corrected_excphandlerhidden() {
    try {
        throw_exception();
    }
}
```

```
    catch(std::bad_alloc& exc) {  
        print_str(exc.what());  
    }  
    catch(std::exception& exc) {  
        print_str(exc.what());  
    }  
}
```

## Result Information

**Group:** Programming

**Language:** C++

**Default:** On

**Command-Line Syntax:** EXCP\_HANDLER\_HIDDEN

**Impact:** Medium

**CWE ID:** 755

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Execution of a binary from a relative path can be controlled by an external actor

Command with relative path is vulnerable to malicious attack

## Description

**Execution of a binary from a relative path can be controlled by an external actor** detects calls to an external command. If the call uses a relative path or no path to call the external command, Bug Finder flags the call as a defect.

This defect also finds results that the **Execution of externally controlled command** defect checker finds.

## Risk

By using a relative path or no path to call an external command, your program uses an unsafe search process to find the command. An attacker can control the search process and replace the intended command with a command of their own.

## Fix

When you call an external command, specify the full path.

## Examples

### Call Command with Relative Path

```
# define _GNU_SOURCE
# include <sys/types.h>
# include <sys/socket.h>
# include <unistd.h>
# include <stdio.h>
# include <stdlib.h>
# include <wchar.h>
```

```
# include <string.h>
# define MAX_BUFFER 100

void rel_path()
{
    char * data;
    char data_buf[MAX_BUFFER] = "";
    data = data_buf;

    strcpy(data, "ls -la");
    FILE *pipe;
    pipe = popen(data, "wb");
    if (pipe != NULL) pclose(pipe);
}
```

In this example, Bug Finder flags `popen` because it tries to call `ls -la` using a relative path. An attacker can manipulate the command to use a malicious version.

One possible correction is to use the full path when calling the command.

```
# define _GNU_SOURCE
# include <sys/types.h>
# include <sys/socket.h>
# include <unistd.h>
# include <stdio.h>
# include <stdlib.h>
# include <wchar.h>
# include <string.h>
# define MAX_BUFFER 100

void rel_path()
{
    char * data;
    char data_buf[MAX_BUFFER] = "";
    data = data_buf;

    strcpy(data, "/usr/bin/ls -la");
    FILE *pipe;
    pipe = popen(data, "wb");
    if (pipe != NULL) pclose(pipe);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** RELATIVE\_PATH\_CMD

**Impact:** Medium

**CWE ID:** 114, 427

## See Also

Load of library from a relative path can be controlled by an external actor|Vulnerable path manipulation|Execution of externally controlled command|Command executed from externally controlled path

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## Introduced in R2015b

## Execution of externally controlled command

Command argument from an unsecure source vulnerable to operating system command injection

### Description

**Execution of externally controlled command** checks for commands that are fully or partially constructed from externally controlled input.

### Risk

Attackers can use the externally controlled input as operating system commands, or arguments to the application. An attacker could read or modify sensitive data can be read or modified, execute unintended code, or gain access to other aspects of the program.

### Fix

Validate the inputs to allow only intended input values. For example, create a whitelist of acceptable inputs and compare the input against this list.

## Examples

### Call Argument Command

```
#define _XOPEN_SOURCE
#define _GNU_SOURCE

#include "stdlib.h"
#include "stdio.h"
#include "string.h"
#include "unistd.h"
#include "dlfcn.h"
#include "limits.h"

enum {
```

```
    SIZE10 = 10,  
    SIZE100 = 100,  
    SIZE128 = 128  
};  
  
void taintedexternalcmd(char* usercmd)  
{  
    char cmd[SIZE128] = "/usr/bin/cat ";  
    strcat(cmd, usercmd);  
    system(cmd);  
}
```

This example function calls a command from a user argument without checking the command variable.

One possible correction is to use a `switch` statement to run a predefined command, using the user input as the switch variable.

```
#define _XOPEN_SOURCE  
#define _GNU_SOURCE  
  
#include "stdlib.h"  
#include "stdio.h"  
#include "string.h"  
#include "unistd.h"  
#include "dlfcn.h"  
#include "limits.h"  
  
enum {  
    SIZE10 = 10,  
    SIZE100 = 100,  
    SIZE128 = 128  
};  
enum { CMD0 = 1, CMD1, CMD2 };  
  
void taintedexternalcmd(int usercmd)  
{  
    char cmd[SIZE128] = "/usr/bin/cat ";  
  
    switch(usercmd) {  
        case CMD0:  
            strcat(cmd, "*.c");  
            break;  
        case CMD1:  

```

```
        strcat(cmd, "*.h");
        break;
    case CMD2:
        strcat(cmd, "*.cpp");
        break;
    default:
        strcat(cmd, "*.c");
    }
    system(cmd);
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_EXTERNAL\_CMD

**Impact:** Medium

**CWE ID:** 77, 78, 88, 114

**CERT C ID:** API00-C, ENV33-C, STR02-C

**CERT C++ ID:** ENV33-C

**ISO/IEC TS 17961 ID:** syscall

## See Also

Use of externally controlled environment variable|Host change using externally controlled elements|Command executed from externally controlled path|Library loaded from externally controlled path|Execution of a binary from a relative path can be controlled by an external actor

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# File access between time of check and use (TOCTOU)

File or folder might change state due to access race

## Description

**File access between time of check and use (TOCTOU)** detects race condition issues between checking the existence of a file or folder, and using a file or folder.

## Risk

An attacker can access and manipulate your file between your check for the file and your use of a file. Symbolic links are particularly risky because an attacker can change where your symbolic link points.

## Fix

Before using a file, do not check its status. Instead, use the file and check the results afterward.

## Examples

### Check File Before Using

```
#include <stdio.h>
#include <fcntl.h>
#include <unistd.h>

extern void print_tofile(FILE* f);

void toctou(char * log_path) {
    if (access(log_path, W_OK)==0) {
        FILE* f = fopen(log_path, "w");
        if (f) {
```

```
        print_tofile(f);
        fclose(f);
    }
}
```

In this example, before opening and using the file, the function checks if the file exists. However, an attacker can change the file between the first and second lines of the function.

One possible correction is to open the file, and then check the existence and contents afterward.

```
#include <stdio.h>
#include <fcntl.h>
#include <unistd.h>

extern void print_tofile(FILE* f);

void toctou(char * log_path) {
    int fd = open(log_path, O_WRONLY);
    if (fd!=-1) {
        FILE *f = fdopen(fd, "w");
        if (f) {
            print_tofile(f);
            fclose(f);
        }
    }
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TOCTOU

**Impact:** Medium

**CWE ID:** 367

**CERT C ID:** FIO01-C, FIO45-C, POS35-C

**CERT C++ ID:** FIO45-C, POS35-C

## **See Also**

Data race | Bad file access mode or status

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## File descriptor exposure to child process

Copied file descriptor used in multiple processes

### Description

**File descriptor exposure to child process** occurs when a process is forked and the child process uses file descriptors inherited from the parent process.

### Risk

When you fork a child process, file descriptors are copied from the parent process, which means that you can have concurrent operations on the same file. Use of the same file descriptor in the parent and child processes can lead to race conditions that may not be caught during standard debugging. If you do not properly manage the file descriptor permissions and privileges, the file content is vulnerable to attacks targeting the child process.

### Fix

Check that the file has not been modified before forking the process. Close all inherited file descriptors and reopen them with stricter permissions and privileges, such as read-only permission.

### Examples

#### File Descriptor Accessed from Forked Process

```
# include <stdio.h>
# include <stdlib.h>
# include <string.h>
# include <unistd.h>
# include <fcntl.h>
# include <sys/types.h>
# include <sys/stat.h>
```

```
const char *test_file="/home/user/test.txt";

void func(void)
{
    char c;
    pid_t pid;
    /* create file descriptor in read and write mode */
    int fd = open(test_file, O_RDWR);
    if (fd == -1)
    {
        /* Handle error */
        abort();
    }
    /* fork process */
    pid = fork();
    if (pid == -1)
    {
        /* Handle error */
        abort();
    }
    else if (pid == 0)
    { /* Child process accesses file descriptor inherited
       from parent process */
        (void)read(fd, &c, 1);
    }
    else
    { /* Parent process access same file descriptor as
       child process */
        (void)read(fd, &c, 1);
    }
}
```

In this example, a file descriptor `fd` is created in read and write mode. The process is then forked. The child process inherits and accesses `fd` with the same permissions as the parent process. A race condition exists between the parent and child processes. The contents of the file is vulnerable to attacks through the child process.

After you create the file descriptor, check the file for tampering. Then, close the inherited file descriptor in the child process and reopen it in read-only mode.

```
# include <stdio.h>
# include <stdlib.h>
# include <string.h>
# include <unistd.h>
# include <fcntl.h>
# include <sys/types.h>
# include <sys/stat.h>

const char *test_file="/home/user/test.txt";

void func(void)
{
    char c;
    pid_t pid;

    /* Get the state of file for further file tampering checking */

    /* create file descriptor in read and write mode */
    int fd = open(test_file, O_RDWR);
    if (fd == -1)
    {
        /* Handle error */
        abort();
    }

    /* Be sure the file was not tampered with while opening */

    /* fork process */

    pid = fork();
    if (pid == -1)
    {
        /* Handle error */
        (void)close(fd);
        abort();
    }
    else if (pid == 0)
    { /* Close file descriptor in child process and reopen
       it in read only mode */

        (void)close(fd);
        fd = open(test_file, O_RDONLY);
        if (fd == -1)
```

```
    {
        /* Handle error */
        abort();
    }

    (void)read(fd, &c, 1);
    (void)close(fd);
}
else
{ /* Parent accesses original file descriptor */
    (void)read(fd, &c, 1);
    (void)close(fd);
}
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** FILE\_EXPOSURE\_TO\_CHILD

**Impact:** Medium

**CWE ID:** 362

**CERT C ID:** POS38-C

**CERT C++ ID:** POS38-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## File manipulation after `chroot()` without `chdir("/")`

Path-related vulnerabilities for file manipulated after call to `chroot`

### Description

**File manipulation after `chroot()` without `chdir("/")`** detects access to the file system outside of the jail created by `chroot`. By calling `chroot`, you create a file system jail that confines access to a specific file subsystem. However, this jail is ineffective if you do not call `chdir("/")`.

### Risk

If you do not call `chdir("/")` after creating a `chroot` jail, file manipulation functions that takes a path as an argument can access files outside of the jail. An attacker can still manipulate files outside the subsystem that you specified, making the `chroot` jail ineffective.

### Fix

After calling `chroot`, call `chdir("/")` to make your `chroot` jail more secure.

### Examples

#### Open File in `chroot`-jail

```
#include <unistd.h>
#include <stdio.h>

const char root_path[] = "/var/ftproot";
const char log_path[] = "file.log";
FILE* chrootmisuse() {
    FILE* res;
    chroot(root_path);
```

```

    chdir("base");
    res = fopen(log_path, "r");
    return res;
}

```

This example uses `chroot` to create a `chroot-jail`. However, to use the `chroot` jail securely, you must call `chdir("/")` afterward. This example calls `chdir("base")`, which is not equivalent. Bug Finder also flags `fopen` because `fopen` opens a file in the vulnerable `chroot-jail`.

Before opening files, call `chdir("/")`.

```

#include <unistd.h>
#include <stdio.h>

const char root_path[] = "/var/ftproot";
const char log_path[] = "file.log";
FILE* chrootmisuse() {
    FILE* res;
    chroot(root_path);
    chdir("/");
    res = fopen(log_path, "r");
    return res;
}

```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CHROOT\_MISUSE

**Impact:** Medium

**CWE ID:** 243, 922

**CERT C ID:** POS05-C

## See Also

Umask used with `chmod`-style arguments | Vulnerable path manipulation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Float conversion overflow

Overflow when converting between floating point data types

## Description

**Float conversion overflow** occurs when converting a floating point number to a smaller floating point data type. If the variable does not have enough memory to represent the original number, the conversion overflows.

The exact storage allocation for different floating point types depends on your processor. See `Target processor type (-target)`.

## Examples

### Converting from double to float

```
float convert(void) {  
    double diam = 1e100;  
    return (float)diam;  
}
```

In the return statement, the variable `diam` of type `double` (64 bits) is converted to a variable of type `float` (32 bits). However, the value  $1^{100}$  requires more than 32 bits to be precisely represented.

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `FLOAT_CONV_OVFL`

**Impact:** High

**CWE ID:** 189, 197, 681

**CERT C ID:** FLP03-C, FLP34-C  
**CERT C++ ID:** FLP34-C

## See Also

### **Polyspace Analysis Options**

Find defects (-checkers)

### **Polyspace Results**

Integer conversion overflow|Unsigned integer conversion overflow|  
Sign change integer conversion overflow

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Float division by zero

Dividing floating point number by zero

## Description

**Float division by zero** occurs when the denominator of a division operation can be a zero-valued floating point number.

## Examples

### Dividing a Floating Point Number by Zero

```
float fraction(float num)
{
    float denom = 0.0;
    float result = 0.0;

    result = num/denom;

    return result;
}
```

A division by zero error occurs at `num/denom` because `denom` is zero.

```
float fraction(float num)
{
    float denom = 0.0;
    float result = 0.0;

    if( ((int)denom) != 0)
        result = num/denom;

    return result;
}
```

Before dividing, add a test to see if the denominator is zero, checking before division occurs. If `denom` is always zero, this correction can produce a dead code defect in your Polyspace results.

One possible correction is to change the denominator value so that `denom` is not zero.

```
float fraction(float num)
{
    float denom = 2.0;
    float result = 0.0;

    result = num/denom;

    return result;
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `FLOAT_ZERO_DIV`

**Impact:** High

**CWE ID:** 189, 369

**CERT C ID:** FLP03-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Integer division by zero

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Float overflow

Overflow from operation between floating points

### Description

**Float overflow** occurs when an operation on floating point variables can result in values that cannot be represented by the result data type. The data type of a variable determines the number of bytes allocated for the variable storage and constrains the range of allowed values.

The exact storage allocation for different floating point types depends on your processor. See Target processor type (-target).

### Examples

#### Multiplication of Floats

```
#include <float.h>

float square(void) {
    float val = FLT_MAX;
    return val * val;
}
```

In the return statement, the variable `val` is multiplied by itself. The square of the maximum float value cannot be represented by a float (the return type for this function) because the value of `val` is the maximum float value.

One possible correction is to store the result of the operation in a larger data type. In this example, by returning a `double` instead of a `float`, the overflow defect is fixed.

```
#include <float.h>

double square(void) {
```

```
float val = FLT_MAX;  
  
return (double)val * (double)val;  
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** FLOAT\_OVFL

**Impact:** Low

**CWE ID:** 189, 682, 873

**CERT C ID:** FLP03-C, FLP06-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Integer overflow|Unsigned integer overflow

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2013b

## Format string specifiers and arguments mismatch

String specifiers do not match corresponding arguments

### Description

**Format string specifiers and arguments mismatch** occurs when the parameters in the format specification do not match their corresponding arguments. For example, an argument of type `unsigned long` must have a format specification of `%lu`.

### Examples

#### Printing a Float

```
#include <stdio.h>

void string_format(void) {
    unsigned long fst = 1;
    printf("%d\n", fst);
}
```

In the `printf` statement, the format specifier, `%d`, does not match the data type of `fst`.

One possible correction is to use the `%lu` format specifier. This specifier matches the unsigned integer type and long size of `fst`.

```
#include <stdio.h>

void string_format(void) {
    unsigned long fst = 1;
```

```
    printf("%lu\n", fst);  
}
```

One possible correction is to change the argument to match the format specifier. Convert `fst` to an integer to match the format specifier and print the value 1.

```
#include <stdio.h>  
  
void string_format(void) {  
    unsigned long fst = 1;  
    printf("%d\n", (int)fst);  
}
```

## Check Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** STRING\_FORMAT

**Impact:** Low

**CWE ID:** 683, 685, 686

**CERT C ID:** DCL10-C, DCL11-C, EXP37-C, FIO47-C, INT00-C, MSC15-C

**CERT C++ ID:** EXP37-C, FIO47-C

**ISO/IEC TS 17961 ID:** argcomp, invfmtstr

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Invalid use of standard library string routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## **External Websites**

Standard library output functions

**Introduced in R2013b**

# Function called from signal handler not asynchronous-safe

Call to interrupted function causes undefined program behavior

## Description

**Function called from signal handler not asynchronous-safe** occurs when a signal handler calls a function that is not asynchronous-safe according to the POSIX standard. An asynchronous-safe function can be interrupted at any point in its execution, then called again without causing an inconsistent state. It can also correctly handle global data that might be in an inconsistent state.

If a signal handler calls another function that calls an asynchronous-unsafe function, the defect appears on the function call in the signal handler. The defect traceback shows the full path from the signal handler to the asynchronous-unsafe function.

## Risk

When a signal handler is invoked, the execution of the program is interrupted. After the handler is finished, program execution resumes at the point of interruption. If a function is executing at the time of the interruption, calling it from within the signal handler is undefined behavior, unless it is asynchronous-safe.

## Fix

The POSIX standard defines these functions as asynchronous-safe. You can call these functions from a signal handler.

<code>_exit()</code>	<code>getpgrp()</code>	<code>setsockopt()</code>
<code>_Exit()</code>	<code>getpid()</code>	<code>setuid()</code>
<code>abort()</code>	<code>getppid()</code>	<code>shutdown()</code>
<code>accept()</code>	<code>getsockname()</code>	<code>sigaction()</code>
<code>access()</code>	<code>getsockopt()</code>	<code>sigaddset()</code>

<code>aio_error()</code>	<code>getuid()</code>	<code>sigdelset()</code>
<code>aio_return()</code>	<code>kill()</code>	<code>sigemptyset()</code>
<code>aio_suspend()</code>	<code>link()</code>	<code>sigfillset()</code>
<code>alarm()</code>	<code>linkat()</code>	<code>sigismember()</code>
<code>bind()</code>	<code>listen()</code>	<code>signal()</code>
<code>cfgetispeed()</code>	<code>lseek()</code>	<code>sigpause()</code>
<code>cfgetospeed()</code>	<code>lstat()</code>	<code>sigpending()</code>
<code>cfsetispeed()</code>	<code>mkdir()</code>	<code>sigprocmask()</code>
<code>cfsetospeed()</code>	<code>mkdirat()</code>	<code>sigqueue()</code>
<code>chdir()</code>	<code>mkfifo()</code>	<code>sigset()</code>
<code>chmod()</code>	<code>mkfifoat()</code>	<code>sigsuspend()</code>
<code>chown()</code>	<code>mknod()</code>	<code>sleep()</code>
<code>clock_gettime()</code>	<code>mknodat()</code>	<code>socketatmark()</code>
<code>close()</code>	<code>open()</code>	<code>socket()</code>
<code>connect()</code>	<code>openat()</code>	<code>socketpair()</code>
<code>creat()</code>	<code>pathconf()</code>	<code>stat()</code>
<code>dup()</code>	<code>pause()</code>	<code>symlink()</code>
<code>dup2()</code>	<code>pipe()</code>	<code>symlinkat()</code>
<code>execl()</code>	<code>poll()</code>	<code>sysconf()</code>
<code>execle()</code>	<code>posix_trace_event()</code>	<code>tcdrain()</code>
<code>execv()</code>	<code>pselect()</code>	<code>tcflow()</code>
<code>execve()</code>	<code>pthread_kill()</code>	<code>tcflush()</code>
<code>faccessat()</code>	<code>pthread_self()</code>	<code>tcgetattr()</code>
<code>fchdir()</code>	<code>pthread_sigmask()</code>	<code>tcgetpgrp()</code>
<code>fchmod()</code>	<code>quick_exit()</code>	<code>tcsendbreak()</code>
<code>fchmodat()</code>	<code>raise()</code>	<code>tcsetattr()</code>
<code>fchown()</code>	<code>read()</code>	<code>tcsetpgrp()</code>
<code>fchownat()</code>	<code>readlink()</code>	<code>time()</code>
<code>fcntl()</code>	<code>readlinkat()</code>	<code>timer_getoverrun()</code>

<code>fdatasync()</code>	<code>recv()</code>	<code>timer_gettime()</code>
<code>fexecve()</code>	<code>recvfrom()</code>	<code>timer_settime()</code>
<code>fork()</code>	<code>recvmsg()</code>	<code>times()</code>
<code>fpathconf()</code>	<code>rename()</code>	<code>umask()</code>
<code>fstat()</code>	<code>renameat()</code>	<code>uname()</code>
<code>fstatat()</code>	<code>rmdir()</code>	<code>unlink()</code>
<code>fsync()</code>	<code>select()</code>	<code>unlinkat()</code>
<code>ftruncate()</code>	<code>sem_post()</code>	<code>utime()</code>
<code>futimens()</code>	<code>send()</code>	<code>utimensat()</code>
<code>getegid()</code>	<code>sendmsg()</code>	<code>utimes()</code>
<code>geteuid()</code>	<code>sendto()</code>	<code>wait()</code>
<code>getgid()</code>	<code>setgid()</code>	<code>waitpid()</code>
<code>getgroups()</code>	<code>setpgid()</code>	<code>write()</code>
<code>getpeername()</code>	<code>setsid()</code>	

Functions not in the previous table are not asynchronous-safe, and should not be called from a signal handler.

## Examples

### Call to `printf()` Inside Signal Handler

```
#include <signal.h>
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <setjmp.h>
#include <syslog.h>
#include <unistd.h>

#define SIZE20 20

extern volatile sig_atomic_t e_flag;

void display_info(const char *info)
```

```
{
    if (info)
    {
        (void)fputs(info, stderr);
    }
}

void sig_handler(int signum)
{
    /* Call function printf() that is not
    asynchronous-safe */
    printf("signal %d received.", signum);
    e_flag = 1;
}

int main(void)
{
    e_flag = 0;
    if (signal(SIGINT, sig_handler) == SIG_ERR)
    {
        /* Handle error */
    }
    char *info = (char *)calloc(SIZE20, sizeof(char));
    if (info == NULL)
    {
        /* Handle Error */
    }
    while (!e_flag)
    {
        /* Main loop program code */
        display_info(info);
        /* More program code */
    }
    free(info);
    info = NULL;
    return 0;
}
```

In this example, `sig_handler` calls `printf()` when catching a signal. If the handler catches another signal while `printf()` is executing, the behavior of the program is undefined.

Use your signal handler to set only the value of a flag. `e_flag` is of type volatile `sig_atomic_t`. `sig_handler` can safely access it asynchronously.

```
#include <signal.h>
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <setjmp.h>
#include <syslog.h>
#include <unistd.h>

#define SIZE20 20

extern volatile sig_atomic_t e_flag;

void display_info(const char *info)
{
    if (info)
    {
        (void)fputs(info, stderr);
    }
}

void sig_handler1(int signum)
{
    int s0 = signum;
    e_flag = 1;
}

int func(void)
{
    e_flag = 0;
    if (signal(SIGINT, sig_handler1) == SIG_ERR)
    {
        /* Handle error */
    }
    char *info = (char *)calloc(SIZE20, 1);
    if (info == NULL)
    {
        /* Handle error */
    }
    while (!e_flag)
    {
        /* Main loop program code */
    }
}
```

```
        display_info(info);
        /* More program code */
    }
    free(info);
    info = NULL;
    return 0;
}
```

### Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SIG\_HANDLER\_ASYNC\_UNSAFE

**Impact:** Medium

**CWE ID:** 364, 387, 413, 479, 663, 828

**CERT C ID:** SIG30-C

**ISO/IEC TS 17961 ID:** asyncsig

### See Also

Function called from signal handler not asynchronous-safe (strict) |  
Return from computational exception signal handler | Shared data  
access within signal handler | Signal call from within signal handler

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Function called from signal handler not asynchronous-safe (strict)

Call to interrupted function causes undefined program behavior

### Description

**Function called from signal handler not asynchronous-safe (strict)** occurs when a signal handler calls a function that is not asynchronous-safe according to the C standard. An asynchronous-safe function can be interrupted at any point in its execution, then called again without causing an inconsistent state. It can also correctly handle global data that might be in an inconsistent state.

When you select the checker **Function called from signal handler not asynchronous-safe**, the checker detects calls to functions that are not asynchronous-safe according to the POSIX standard. **Function called from signal handler not asynchronous-safe (strict)** does not raise a defect for these cases. **Function called from signal handler not asynchronous-safe (strict)** raises a defect for functions that are asynchronous-safe according to the POSIX standard but not according to the C standard.

If a signal handler calls another function that calls an asynchronous-unsafe function, the defect appears on the function call in the signal handler. The defect traceback shows the full path from the signal handler to the asynchronous-unsafe function.

### Risk

When a signal handler is invoked, the execution of the program is interrupted. After the handler is finished, program execution resumes at the point of interruption. If a function is executing at the time of the interruption, calling it from within the signal handler is undefined behavior, unless it is asynchronous-safe.

### Fix

The C standard defines the following functions as asynchronous-safe. You can call these functions from a signal handler:

- abort()
- \_Exit()
- quick\_exit()
- signal()

## Examples

### Call to raise() Inside Signal Handler

```
#include <signal.h>
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <setjmp.h>
#include <syslog.h>
#include <unistd.h>

void SIG_ERR_handler(int signum)
{
    int s0 = signum;
    /* SIGTERM specific handling */
}

void sig_handler(int signum)
{
    int s0 = signum;
    /* Call raise() */
    if (raise(SIGTERM) != 0) {
        /* Handle error */
    }
}

int finc(void)
{
    if (signal(SIGTERM, SIG_ERR_handler) == SIG_ERR)
    {
        /* Handle error */
    }
    if (signal(SIGINT, sig_handler) == SIG_ERR)
    {
        /* Handle error */
    }
}
```

```
    }
    /* Program code */
    if (raise(SIGINT) != 0)
    {
        /* Handle error */
    }
    /* More code */
    return 0;
}
```

In this example, `sig_handler` calls `raise()` when catching a signal. If the handler catches another signal while `raise()` is executing, the behavior of the program is undefined.

According to the C standard, the only functions that you can safely call from a signal handler are `abort()`, `_Exit()`, `quick_exit()`, and `signal()`.

```
#include <signal.h>
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <setjmp.h>
#include <syslog.h>
#include <unistd.h>

void SIG_ERR_handler(int signum)
{
    int s0 = signum;
    /* SIGTERM specific handling */
}

void sig_handler(int signum)
{
    int s0 = signum;

}

int func(void)
{
    if (signal(SIGTERM, SIG_ERR_handler) == SIG_ERR)
    {
        /* Handle error */
    }
}
```

```
    }
    if (signal(SIGINT, sig_handler) == SIG_ERR)
    {
        /* Handle error */
    }
    /* Program code */
    if (raise(SIGINT) != 0)
    {
        /* Handle error */
    }
    /* More code */
    return 0;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SIG\_HANDLER\_ASYNC\_UNSAFE\_STRICT

**Impact:** Medium

**CWE ID:** 364, 387, 413, 479, 663, 828

**CERT C ID:** SIG30-C

**ISO/IEC TS 17961 ID:** asyncsig

## See Also

Function called from signal handler not asynchronous-safe | Shared data access within signal handler | Signal call from within signal handler

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

# Function pointer assigned with absolute address

Constant expression is used as function address is vulnerable to code injection

## Description

**Function pointer assigned with absolute address** looks for assignments to function pointers. If the function pointer is assigned an absolute address, Bug Finder raises a defect.

Bug Finder considers expressions with any combination of literal constants as an absolute address. The one exception is when the value of the expression is zero.

## Risk

Using a fixed address is not portable because it is possible the address is invalid on other platforms.

An attacker can inject code at the absolute address, causing your program to execute arbitrary, possibly malicious, code.

## Fix

Do not use an absolute address with function pointers.

## Examples

### Function Pointer Address Assignment

```
extern int func0(int i, char c);  
typedef int (*FuncPtr) (int, char);  
  
FuncPtr funcptrabsoluteaddr() {
```

```
    return (FuncPtr)0x08040000;  
}
```

In this example, the function returns a function pointer to the address `0x08040000`. If an attacker knows this absolute address, an attacker can compromise your program.

One possible correction is to use the address of an existing function instead.

```
extern int func0(int i, char c);  
typedef int (*FuncPtr) (int, char);  
  
FuncPtr funcptrabsoluteaddr() {  
    return &func0;  
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** FUNC\_PTR\_ABSOLUTE\_ADDR

**Impact:** Low

**CWE ID:** 587

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Hard-coded buffer size

Size of memory buffer is a numerical value instead of symbolic constant

### Description

**Hard-coded buffer size** occurs when you use a numerical value instead of a symbolic constant when declaring a memory buffer such as an array.

### Risk

Hard-coded buffer size causes the following issues:

- Hard-coded buffer size increases the likelihood of mistakes and therefore maintenance costs. If a policy change requires developers to change the buffer size, they must change every occurrence of the buffer size in the code.
- Hard-constant constants can be exposed to attack if the code is disclosed.

### Fix

Use a symbolic name instead of a hard-coded constant for buffer size. Symbolic names include `const`-qualified variables, `enum` constants, or macros.

`enum` constants are recommended.

- Macros are replaced by their constant values after preprocessing. Therefore, they can expose the loop boundary.
- `enum` constants are known at compilation time. Therefore, compilers can optimize the loops more efficiently.

`const`-qualified variables are usually known at run time.

## Examples

### Hard-Coded Buffer Size

```
int table[100];

void read(int);

void func(void) {
    for (int i=0; i<100; i++)
        read(table[i]);
}
```

In this example, the size of the array `table` is hard-coded.

One possible correction is to replace the hard-coded size with a symbolic name.

```
const int MAX_1 = 100;
#define MAX_2 100
enum { MAX_3 = 100 };

int table_1[MAX_1];
int table_2[MAX_2];
int table_3[MAX_3];

void read(int);

void func(void) {
    for (int i=0; i < MAX_1; i++)
        read(table_1[i]);
    for (int i=0; i < MAX_2; i++)
        read(table_2[i]);
    for (int i=0; i < MAX_3; i++)
        read(table_3[i]);
}
```

## Result Information

**Group:** Good practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** HARD\_CODED\_BUFFER\_SIZE

**Impact:** Low

**CWE ID:** 547

**CERT C ID:** DCL06-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Function that can spuriously fail not wrapped in loop

Loop checks failure condition after possible spurious failure

### Description

**Function that can spuriously fail not wrapped in loop** occurs when the following atomic compare and exchange functions that can fail spuriously are called from outside a loop.

- C atomic functions:
  - `atomic_compare_exchange_weak()`
  - `atomic_compare_exchange_weak_explicit()`
- C++ atomic functions:
  - `std::atomic<T>::compare_exchange_weak(T* expected, T desired)`
  - `std::atomic<T>::compare_exchange_weak_explicit(T* expected, T desired, std::memory_order succ, std::memory_order fail)`
  - `std::atomic_compare_exchange_weak(std::atomic<T>* obj, T* expected, T desired)`
  - `std::atomic_compare_exchange_weak_explicit(volatile std::atomic<T>* obj, T* expected, T desired, std::memory_order succ, std::memory_order fail)`

The functions compare the memory contents of the object representations pointed to by `obj` and `expected`. The comparison can spuriously return false even if the memory contents are equal. This spurious failure makes the functions faster on some platforms.

### Risk

An atomic compare and exchange function that spuriously fails can cause unexpected results and unexpected control flow.

## Fix

Wrap atomic compare and exchange functions that can spuriously fail in a loop. The loop checks the failure condition after a possible spurious failure.

## Examples

### **atomic\_compare\_exchange\_weak() Not Wrapped in Loop**

```
#include <stdatomic.h>

extern void reset_count(void);
atomic_int count = ATOMIC_VAR_INIT(0);

void increment_count(void)
{
    int old_count = atomic_load(&count);
    int new_count;
    new_count = old_count + 1;
    if (!atomic_compare_exchange_weak(&count, &old_count, new_count))
        reset_count();
}
```

In this example, `increment_count()` uses `atomic_compare_exchange_weak()` to compare `count` and `old_count`. If the counts are equal, `count` is incremented to `new_count`. If they are not equal, the count is reset. When `atomic_compare_exchange_weak()` fails spuriously, the count is reset unnecessarily.

One possible correction is to wrap the call to `atomic_compare_exchange_weak()` in a while loop. The loop checks the failure condition after a possible spurious failure.

```
#include <stdatomic.h>

extern void reset_count(void);
atomic_int count = ATOMIC_VAR_INIT(0);

void increment_count(void)
{
    int old_count = atomic_load(&count);
```

```
int new_count;
new_count = old_count + 1;

do {
    reset_count();
} while (!atomic_compare_exchange_weak(&count, &old_count, new_count));
}
```

### Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SPURIOUS\_FAILURE\_NOT\_WRAPPED\_IN\_LOOP

**Impact:** Low

**CERT C ID:** CON41-C

**CERT C++ ID:** CON41-C

### See Also

Function that can spuriously wake up not wrapped in loop | Returned value of a sensitive function not checked

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Function that can spuriously wake up not wrapped in loop

Loop checks wake-up condition after possible spurious wake-up

## Description

**Function that can spuriously wake up not wrapped in loop** occurs when the following wait on condition functions are called from outside a loop.

- C functions:
  - `cnd_wait()`
  - `cnd_timedwait()`
- POSIX functions:
  - `pthread_cond_wait()`
  - `pthread_cond_timedwait()`
- C++ `std::condition_variable` and `std::condition_variable_any` class member functions:
  - `wait()`
  - `wait_until()`
  - `wait_for()`

Wait on condition functions pause the execution of the calling thread when a specified condition is met. The thread wakes up and resumes once another thread notifies it with `cnd_broadcast()` or an equivalent function. The wake-up notification can be spurious or malicious.

## Risk

If a thread receives a spurious wake-up notification and the condition of the wait on condition function is not checked, the thread can wake up prematurely. The wake-up can cause unexpected control flow, indefinite blocking of other threads, or denial of service.

## Fix

Wrap wait on condition functions that can wake up spuriously in a loop. The loop checks the wake-up condition after a possible spurious wake-up notification.

## Examples

### `cnd_wait()` Not Wrapped in Loop

```
#include <stdio.h>
#include <stddef.h>
#include <threads.h>

#define THRESHOLD 100

static mtx_t lock;
static cnd_t cond;

void func(int input)
{
    if (thrd_success != mtx_lock(&lock)) {
        /* Handle error */
    }
    /* test condition to pause thread */
    if (input > THRESHOLD) {
        if (thrd_success != cnd_wait(&cond, &lock)) {
            /* Handle error */
        }
    }
    /* Proceed if condition to pause does not hold */

    if (thrd_success != mtx_unlock(&lock)) {
        /* Handle error */
    }
}
```

In this example, the thread uses `cnd_wait()` to pause execution when `input` is greater than `THRESHOLD`. The paused thread can resume if another thread uses `cnd_broadcast()`, which notifies all the threads. This notification causes the thread to wake up even if the pause condition is still true.

One possible correction is to wrap `cnd_wait()` in a while loop. The loop checks the pause condition after the thread receives a possible spurious wake-up notification.

```
#include <stdio.h>
#include <stddef.h>
#include <threads.h>

#define THRESHOLD 100

static mtx_t lock;
static cnd_t cond;

void func(int input)
{
    if (thrd_success != mtx_lock(&lock)) {
        /* Handle error */
    }
    /* test condition to pause thread */
    while (input > THRESHOLD) {
        if (thrd_success != cnd_wait(&cond, &lock)) {
            /* Handle error */
        }
    }
    /* Proceed if condition to pause does not hold */

    if (thrd_success != mtx_unlock(&lock)) {
        /* Handle error */
    }
}
```

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SPURIOUS\_WAKEUP\_NOT\_WRAPPED\_IN\_LOOP

**Impact:** Low

**CERT C ID:** CON36-C

**CERT C++ ID:** CON54-CPP

## **See Also**

Function that can spuriously fail not wrapped in loop | Returned value of a sensitive function not checked

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Hard-coded loop boundary

Loop boundary is a numerical value instead of symbolic constant

## Description

**Hard-coded loop boundary** occurs when you use a numerical value instead of symbolic constant for the boundary of a `for`, `while` or `do-while` loop.

## Risk

Hard-coded loop boundary causes the following issues:

- Hard-coded loop boundary makes the code vulnerable to denial of service attacks when the loop involves time-consuming computation or resource allocation.
- Hard-coded loop boundary increases the likelihood of mistakes and maintenance costs. If a policy change requires developers to change the loop boundary, they must change every occurrence of the boundary in the code.

For instance, the loop boundary is 10000 and represents the maximum number of client connections supported in a network server application. If the server supports more clients, you must change all instances of the loop boundary in your code. Even if the loop boundary occurs once, you have to search for a numerical value of 10000 in your code. The numerical value can occur in places other than the loop boundary. You must browse through those places before you find the loop boundary.

## Fix

Use a symbolic name instead of a hard-coded constant for loop boundary. Symbolic names include `const`-qualified variables, `enum` constants or macros. `enum` constants are recommended because:

- Macros are replaced by their constant values after preprocessing. Therefore, they can expose the buffer size.
- `enum` constants are known at compilation time. Therefore, compilers can allocate storage for them more efficiently.

const-qualified variables are usually known at run time.

## Examples

### Hard-Coded Loop Boundary

```
void performOperation(int);

void func(void) {
    for (int i=0; i<100; i++)
        performOperation(i);
}
```

In this example, the boundary of the for loop is hard-coded.

One possible correction is to replace the hard-coded loop boundary with a symbolic name.

```
const int MAX_1 = 100;
#define MAX_2 100
enum { MAX_3 = 100 };

void performOperation_1(int);
void performOperation_2(int);
void performOperation_3(int);

void func(void) {
    for (int i=0; i<MAX_1; i++)
        performOperation_1(i);
    for (int i=0; i<MAX_2; i++)
        performOperation_2(i);
    for (int i=0; i<MAX_3; i++)
        performOperation_3(i);
}
```

## Result Information

**Group:** Good practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** HARD\_CODED\_LOOP\_BOUNDARY

**Impact:** Low

**CWE ID:** 547

**CERT C ID:** DCL06-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Hard-coded object size used to manipulate memory

Memory manipulation with hard-coded size instead of `sizeof`

### Description

**Hard-coded object size used to manipulate memory** occurs on constants that are memory size arguments for memory functions such as `malloc` or `memset`.

### Risk

If you hard code object size, your code is not portable to architectures with different type sizes. If the constant value is not the same as the object size, the buffer might or might not overflow.

### Fix

For the size argument of memory functions, use `sizeof(object)`.

## Examples

### Assume 4-Byte Integer Pointers

```
#include <stddef.h>
#include <stdlib.h>
enum {
    SIZE3    = 3,
    SIZE20   = 20
};
extern void fill_ints(int **matrix, size_t nb, size_t s);

void bug_hardcodedmemsize()
{
    size_t i, s;
```

```

s = 4;
int **matrix = (int **)calloc(SIZE20, s);
if (matrix == NULL) {
    return; /* Indicate calloc() failure */
}
fill_ints(matrix, SIZE20, s);
free(matrix);
}

```

In this example, the memory allocation function `calloc` is called with a memory size of 4. The memory is allocated for an integer pointer, which can be a more or less than 4 bytes depending on your target. If the integer pointer is not 4 bytes, your program can fail.

When calling `calloc`, replace the hard-coded size with a call to `sizeof`. This change makes your code more portable.

```

#include <stddef.h>
#include <stdlib.h>
enum {
    SIZE3    = 3,
    SIZE20   = 20
};
extern void fill_ints(int **matrix, size_t nb, size_t s);

void corrected_hardcodedmemsize()
{
    size_t i, s;

    s = sizeof(int *);
    int **matrix = (int **)calloc(SIZE20, s);
    if (matrix == NULL) {
        return; /* Indicate calloc() failure */
    }
    fill_ints(matrix, SIZE20, s);
    free(matrix);
}

```

## Result Information

**Group:** Good Practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** HARD\_CODED\_MEM\_SIZE

**Impact:** Low

**CWE ID:** 805

**CERT C ID:** EXP09-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

# Host change using externally controlled elements

Changing host ID from an unsecure source

## Description

**Host change using externally controlled elements** detects uncontrolled arguments in calls to routines that change the host ID, such as `sethostid` (Linux) or `SetComputerName` (Windows).

## Risk

The tainted host ID value can allow external control of system settings. This control can disrupt services, cause unexpected application behavior, or cause other malicious intrusions.

## Fix

Use caution when changing or editing the host ID. Do not allow user-provided values to control sensitive data.

## Examples

### Change Host ID from Function Argument

```
#include <unistd.h>

void bug_taintedhostid(long userhid) {
    sethostid(userhid);
}
```

This example sets a new host ID using the argument passed to the function. Before using the host ID, check the value passed in.

One possible correction is to change the host ID to a predefined ID. This example uses the host argument as a switch variable to choose between the different, predefined host IDs.

```
#include <unistd.h>

extern long called_taintedhostid_sanitize(long);
enum { HI0 = 1, HI1, HI2, HI3 };

void taintedhostid(int host) {

    long hid = 0;
    switch(host) {
        case HI0:
            hid = 0x7f0100;
            break;
        case HI1:
            hid = 0x7f0101;
            break;
        case HI2:
            hid = 0x7f0102;
            break;
        case HI3:
            hid = 0x7f0103;
            break;
        default:
            /* do nothing */
            break;
    }
    if (hid > 0) {
        sethostid(hid);
    }
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_HOSTID

**Impact:** Medium

**CWE ID:** 15

**CERT C ID:** API00-C

## See Also

Execution of externally controlled command|Use of externally controlled environment variable|Host change using externally controlled elements|Command executed from externally controlled path|Library loaded from externally controlled path

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Improper array initialization

Incorrect array initialization when using initializers

### Description

**Improper array initialization** occurs when Polyspace Bug Finder considers that an array initialization using initializers is incorrect.

This defect applies to normal and designated initializers. In C99, with designated initializers, you can place the elements of an array initializer in any order and implicitly initialize some array elements. The designated initializers use the array index to establish correspondence between an array element and an array initializer element. For instance, the statement `int arr[6] = { [4] = 29, [2] = 15 }` is equivalent to `int arr[6] = { 0, 0, 15, 0, 29, 0 }`.

You can use initializers incorrectly in one of the following ways.

Issue	Risk	Possible Fix
In your initializer for a one-dimensional array, you have more elements than the array size.	Unused array initializer elements indicate a possible coding error.	Increase the array size or remove excess elements.
You place the braces enclosing initializer values incorrectly.	Because of the incorrect placement of braces, some array initializer elements are not used.  Unused array initializer elements indicate a possible coding error.	Place braces correctly.

Issue	Risk	Possible Fix
In your designated initializer, you do not initialize the first element of the array explicitly.	The implicit initialization of the first array element indicates a possible coding error. You possibly overlooked the fact that array indexing starts from 0.	Initialize all elements explicitly.
In your designated initializer, you initialize an element twice.	The first initialization is overridden.  The redundant first initialization indicates a possible coding error.	Remove the redundant initialization.
You use designated and nondesignated initializers in the same initialization.	You or another reviewer of your code cannot determine the size of the array by inspection.	Use either designated or nondesignated initializers.

## Examples

### Incorrectly Placed Braces (C Only)

```
int arr[2][3]
= {{1, 2},
   {3, 4},
   {5, 6}
};
```

In this example, the array `arr` is initialized as `{1, 2, 0, 3, 4, 0}`. Because the initializer contains `{5, 6}`, you might expect the array to be initialized `{1, 2, 3, 4, 5, 6}`.

One possible correction is to place the braces correctly so that all elements are explicitly initialized.

```
int a1[2][3]
```

```
= {{1, 2, 3},  
   {4, 5, 6}  
};
```

### **First Element Not Explicitly Initialized**

```
int arr[5]  
= {  
    [1] = 2,  
    [2] = 3,  
    [3] = 4,  
    [4] = 5  
};
```

In this example, `arr[0]` is not explicitly initialized. It is possible that the programmer did not consider that the array indexing starts from 0.

One possible correction is to initialize all elements explicitly.

```
int arr[5]  
= {  
    [0] = 1,  
    [1] = 2,  
    [2] = 3,  
    [3] = 4,  
    [4] = 5  
};
```

### **Element Initialized Twice**

```
int arr[5]  
= {  
    [0] = 1,  
    [1] = 2,  
    [2] = 3,  
    [2] = 4,  
    [4] = 5  
};
```

In this example, `arr[2]` is initialized twice. The first initialization is overridden. In this case, because `arr[3]` was not explicitly initialized, it is possible that the programmer intended to initialize `arr[3]` when `arr[2]` was initialized a second time.

One possible correction is to eliminate the redundant initialization.

```
int arr[5]
= {
    [0] = 1,
    [1] = 2,
    [2] = 3,
    [3] = 4,
    [4] = 5
};
```

## Mix of Designated and Nondesignated Initializers

```
int arr[]
= {
    [0] = 1,
    [3] = 3,
    4,
    [5] = 5,
    6
};
```

In this example, because a mix of designated and nondesignated initializers are used, it is difficult to determine the size of `arr` by inspection.

One possible correction is to use only designated initializers for array initialization.

```
int arr[]
= {
    [0] = 1,
    [3] = 3,
    [4] = 4,
    [5] = 5,
    [6] = 6
};
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** IMPROPER\_ARRAY\_INIT

**Impact:** Medium

**CWE ID:** 665

**CERT C ID:** ARR00-C, ARR02-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Incompatible padding for RSA algorithm operation

Cryptography operation is not supported by the padding type set in context

## Description

**Incompatible padding for RSA algorithm operation** occurs when you perform an RSA algorithm operation on a context object that is not compatible with the padding previously associated with the object.

For instance, you associate the OAEP padding scheme with a context object but later use the context for signature verification, an operation that the padding scheme does not support.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_OAEP_PADDING);  
...  
ret = EVP_PKEY_verify(ctx, out, out_len, in, in_len);
```

## Risk

Padding schemes remove determinism from the RSA algorithm and protect RSA operations from certain kinds of attack.

When you use an incorrect padding scheme, the RSA operation can fail or result in unexpected ciphertext.

## Fix

Before performing an RSA operation, associate the context object with a padding scheme that is compatible with the operation.

- Encryption: Use the OAEP padding scheme.

For instance, use the `EVP_PKEY_CTX_set_rsa_padding` function with the argument `RSA_PKCS1_OAEP_PADDING` or the `RSA_padding_add_PKCS1_OAEP` function.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_OAEP_PADDING);
```

You can also use the PKCS#1v1.5 or SSLv23 schemes. Be aware that these schemes are considered insecure.

You can then use functions such as `EVP_PKEY_encrypt` / `EVP_PKEY_decrypt` or `RSA_public_encrypt` / `RSA_private_decrypt` on the context.

- Signature: Use the RSA-PSS padding scheme.

For instance, use the `EVP_PKEY_CTX_set_rsa_padding` function with the argument `RSA_PKCS1_PSS_PADDING`.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_PSS_PADDING);
```

You can also use the ANSI X9.31, PKCS#1v1.5, or SSLv23 schemes. Be aware that these schemes are considered insecure.

You can then use functions such as the `EVP_PKEY_sign`-`EVP_PKEY_verify` pair or the `RSA_private_encrypt`-`RSA_public_decrypt` pair on the context.

If you perform two kinds of operation with the same context, after the first operation, reset the padding scheme in the context before the second operation.

## Examples

### OAEP Padding for Signature Operation

```
#include <stddef.h>
#include <openssl/rsa.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;

int func(unsigned char *src, size_t len, RSA* rsa){
    if (rsa == NULL) fatal_error();
    return RSA_private_encrypt(len, src, out_buf, rsa, RSA_PKCS1_OAEP_PADDING);
}
```

In this example, the function `RSA_private_encrypt` performs a signature operation by using the OAEP padding scheme, which supports encryption operations only.

One possible correction is to use the RSA-PSS padding scheme. The corrected example uses the function `RSA_padding_add_PKCS1_PSS` to associate the padding scheme with the context.

```
#include <stddef.h>
#include <openssl/evp.h>
#include <openssl/rsa.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *msg_pad;
unsigned char *out_buf;

int func(unsigned char *src, size_t len, RSA* rsa){
    if (rsa == NULL) fatal_error();

    ret = RSA_padding_add_PKCS1_PSS(rsa, msg_pad, src, EVP_sha256(), -2);
    if (ret <= 0) fatal_error();

    return RSA_private_encrypt(len, msg_pad, out_buf, rsa, RSA_NO_PADDING);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_RSA\_BAD\_PADDING

**Impact:** Medium

**CWE ID:** 310, 372, 573, 664

## See Also

Missing blinding for RSA algorithm|Missing padding for RSA algorithm  
|Nonsecure RSA public exponent|Weak padding for RSA algorithm

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

# Inappropriate I/O operation on device files

Operation can result in security vulnerabilities or a system failure

## Description

**Inappropriate I/O operation on device files** occurs when you do not check whether a file name parameter refers to a device file before you pass it to these functions:

- `fopen()`
- `fopen_s()`
- `freopen()`
- `remove()`
- `rename()`
- `CreateFile()`
- `CreateFileA()`
- `CreateFileW()`
- `_wfopen()`
- `_wfopen_s()`

Device files are files in a file system that provide an interface to device drivers. You can use these files to interact with devices.

**Inappropriate I/O operation on device files** does not raise a defect when:

- You use `stat` or `lstat`-family functions to check the file name parameter before calling the previously listed functions.
- You use a string comparison function to compare the file name against a list of device file names.

## Risk

Operations appropriate only for regular files but performed on device files can result in denial-of-service attacks, other security vulnerabilities, or system failures.

## Fix

Before you perform an I/O operation on a file:

- Use `stat()`, `lstat()`, or an equivalent function to check whether the file name parameter refers to a regular file.
- Use a string comparison function to compare the file name against a list of device file names.

## Examples

### Using `fopen()` Without Checking `file_name`

```
#include <stdio.h>
#include <string.h>

#define SIZE1024 1024

FILE* func()
{
    FILE* f;
    const char file_name[SIZE1024] = "./tmp/file";

    if ((f = fopen(file_name, "w")) == NULL) {
        /*handle error */
    };
    /*operate on file */
}
```

In this example, `func()` operates on the file `file_name` without checking whether it is a regular file. If `file_name` is a device file, attempts to access it can result in a system failure.

One possible correction is to use `lstat()` and the `S_ISREG` macro to check whether the file is a regular file. This solution contains a TOCTOU race condition that can allow an attacker to modify the file after you check it but before the call to `fopen()`. To prevent this vulnerability, ensure that `file_name` refers to a file in a secure folder.

```
#include <stdlib.h>
#include <stdio.h>
```

```
#include <string.h>
#include <sys/stat.h>

#define SIZE1024 1024

FILE* func()
{
    FILE* f;
    const char file_name[SIZE1024] = "./tmp/file";
    struct stat orig_st;
    if ((lstat(file_name, &orig_st) != 0) ||
        (!S_ISREG(orig_st.st_mode))) {
        exit(0);
    }
    if ((f = fopen(file_name, "w")) == NULL) {
        /*handle error */
    };
    /*operate on file */
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** INAPPROPRIATE\_IO\_ON\_DEVICE

**Impact:** Medium

**CWE ID:** 67

**CERT C ID:** FIO32-C

**CERT C++ ID:** FIO32-C

## See Also

File access between time of check and use (TOCTOU) | Opening previously opened resource | Resource leak | Returned value of a sensitive function not checked | Vulnerable path manipulation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Incompatible types prevent overriding

Derived class method hides a `virtual` base class method instead of overriding it

## Description

**Incompatible types prevent overriding** occurs when a derived class method has the same name and number of parameters as a `virtual` base class method but:

- Differ in at least one parameter type.
- Differ in the presence or absence of qualifiers such as `const`.

The derived class method hides the `virtual` base class method instead of overriding it.

## Risk

Risks include the following:

- If you intend that the derived class method must override the base class method, the overriding does not occur.
- Because the base class method is hidden, you cannot use a derived class object to call the method. If you use a derived class object to call the method with the base class parameters, the derived class method is called instead. For the parameters whose types do not match the arguments that you pass, a cast takes place if possible. Otherwise, a compilation failure occurs.

## Fix

Possible solutions include the following:

- If you want the derived class method to override the base class method, change the interface of the derived class method.

For instance, change the parameter type or add a `const` qualifier if required.

- Otherwise, add the line `using Base_class_name::method_name` to the derived class declaration. In this way, you can access the base class method using an object of the derived class.

## Examples

### typedef Causing Virtual Function Hiding in Derived Class

```
class Base {
public:
    Base();
    virtual ~Base();
    virtual void func(float i);
    virtual void funcp(float* i);
    virtual void funcr(float& i);
};

typedef double Float;

class Derived: public Base {
public:
    Derived();
    ~Derived();
    void func(Float i);
    void funcp(Float* i);
    void funcr(Float& i);
};
```

In this example, because of the statement `typedef double Float;`, the `Derived` class methods `func`, `funcp` and `funcr` have double arguments while the `Base` class methods with the same name have `float` arguments.

Therefore, you cannot access the `Base` class methods using a `Derived` class object.

The defect appears on the method that hides a base class method. To find which base class method is hidden:

- 1 Navigate to the base class definition. On the **Source** pane, right-click the base class name and select **Go To Definition**.
- 2 In the base class definition, identify the `virtual` method that has the same name as the derived class method name.

One possible correction is to use the same argument type for the base and derived class methods to enable overriding. Otherwise, if you want to call the `Base` class methods with

the float arguments using a Derived class object, add the line using `Base::method_name` to the Derived class declaration.

```
class Base {
public:
    Base();
    virtual ~Base();
    virtual void func(float i);
    virtual void funcp(float* i);
    virtual void funcr(float& i);
};

typedef double Float;

class Derived: public Base {
public:
    Derived();
    ~Derived();
    using Base::func;
    using Base::funcp;
    using Base::funcr;
    void func(Float i);
    void funcp(Float* i);
    void funcr(Float& i);
};
```

## const Qualifier Missing in Derived Class Method

```
namespace Missing_Const {
class Base {
public:
    virtual void func(int) const ;
    virtual ~Base() ;
} ;

class Derived : public Base {
public:
    virtual void func(int) ;

} ;
}
```

In this example, `Derived::func` does not have a `const` qualifier but `Base::func` does. Therefore, `Derived::func` does not override `Base::func`.

To enable overriding, add the `const` qualifier to the derived class method declaration.

```
namespace Missing_Const {
class Base {
public:
    virtual void func(int) const ;
    virtual ~Base() ;
} ;

class Derived : public Base {
public:
    virtual void func(int) const;

} ;
}
```

## Value Instead of Reference in Derived Class Method

```
namespace Missing_Ref {

class Obj {
    int data;
};

class Base {
public:
    virtual void func(Obj& o);
    virtual ~Base() ;
} ;

class Derived : public Base {
public:
    virtual void func(Obj o) ;

} ;
}
```

In this example, `Derived::func` accepts an `Obj` parameter by value but `Base::func` accepts an `Obj` parameter by reference. Therefore, `Derived::func` does not override `Base::func`.

To enable overriding, pass the derived class method parameter by reference.

```
namespace Missing_Ref {  
  
class Obj {  
    int data;  
};  
  
class Base {  
public:  
    virtual void func(Obj& o);  
    virtual ~Base() ;  
} ;  
  
class Derived : public Base {  
public:  
    virtual void func(Obj& o) ;  
  
} ;  
}
```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** On

**Command-Line Syntax:** VIRTUAL\_FUNC\_HIDING

**Impact:** Medium

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Conversion or deletion of incomplete class pointer

You delete or cast to a pointer to an incomplete class

### Description

**Conversion or deletion of incomplete class pointer** occurs when you delete or cast to a pointer to an incomplete class. An incomplete class is one whose definition is not visible at the point where the class is used.

For instance, the definition of class `Body` is not visible when the `delete` operator is called on a pointer to `Body`:

```
class Handle {
    class Body *impl;
public:
    ~Handle() { delete impl; }
    // ...
};
```

### Risk

When you delete a pointer to an incomplete class, it is not possible to call any nontrivial destructor that the class might have. If the destructor performs cleanup activities such as memory deallocation, these activities do not happen.

A similar problem happens, for instance, when you downcast to a pointer to an incomplete class (downcasting is casting from a pointer to a base class to a pointer to a derived class). At the point of downcasting, the relationship between the base and derived class is not known. In particular, if the derived class inherits from multiple classes, at the point of downcasting, this information is not available. The downcasting cannot make the necessary adjustments for multiple inheritance and the resulting pointer cannot be dereferenced.

A similar statement can be made for upcasting (casting from a pointer to derived class to a pointer to a base class).

## Fix

When you delete or downcast to a pointer to a class, make sure that the class definition is visible.

Alternatively, you can perform one of these actions:

- Instead of a regular pointer, use the `std::shared_ptr` type to point to the incomplete class.
- When downcasting, make sure that the result is valid. Write error-handling code for invalid results.

## Examples

### Deletion of Pointer to Incomplete Class

```
class Handle {
    class Body *impl;
public:
    ~Handle() { delete impl; }
    // ...
};
```

In this example, the definition of class `Body` is not visible when the pointer to `Body` is deleted.

One possible correction is to make sure that the class definition is visible when a pointer to the class is deleted.

```
class Handle {
    class Body *impl;
public:
    ~Handle();
    // ...
};

// Elsewhere
class Body { /* ... */ };

Handle::~~Handle() {
```

```
    delete impl;
}
```

Another possible correction is to use the `std::shared_ptr` type instead of a regular pointer.

```
#include <memory>

class Handle {
    std::shared_ptr<class Body> impl;
public:
    Handle();
    ~Handle() {}
    // ...
};
```

## Downcasting to Pointer to Incomplete Class

File1.h:

```
class Base {
protected:
    double var;
public:
    Base() : var(1.0) {}
    virtual void do_something();
    virtual ~Base();
};
```

File2.h:

```
void funcprint(class Derived *);
class Base *get_derived();
```

File1.cpp:

```
#include "File1.h"
#include "File2.h"

void getandprint() {
    Base *v = get_derived();
    funcprint(reinterpret_cast<class Derived *>(v));
}
```

File2.cpp:

```
#include "File2.h"
#include "File1.h"
#include <iostream>

class Base2 {
protected:
    short var2;
public:
    Base2() : var2(12) {}
};

class Derived : public Base2, public Base {
    float var_derived;
public:
    Derived() : Base2(), Base(), var_derived(1.2f) {}
    void do_something()
    {
        std::cout << "var_derived: "
                  << var_derived << ", var : " << var
                  << ", var2: " << var2 << std::endl;
    }
};

void funcprint(Derived *d) {
    d->do_something();
}

Base *get_derived() {
    return new Derived;
}
```

In this example, the definition of class `Derived` is not visible in `File1.cpp` when a `Base*` pointer is downcast to a `Derived*` pointer.

In `File2.cpp`, class `Derived` derives from two classes, `Base` and `Base2`. This information about multiple inheritance is not available at the point of downcasting in `File1.cpp`. The result of downcasting is passed to the function `funcprint` and dereferenced in the body of `funcprint`. Because the downcasting was done with incomplete information, the dereference can be invalid.

One possible correction is to define the class `Derived` before downcasting a `Base*` pointer to a `Derived*` pointer.

In this corrected example, the downcasting is done in `File2.cpp` in the body of `funcprint` at a point where the definition of class `Derived` is visible. The downcasting is not done in `File1.cpp` where the definition of `Derived` is not visible. The changes from the previous incorrect example are highlighted.

`File1.h`:

```
class Base {
protected:
    double var;
public:
    Base() : var(1.0) {}
    virtual void do_something();
    virtual ~Base();
};
```

`File2.h`:

```
void funcprint(class Base *);
class Base *get_derived();
```

`File1.cpp`:

```
#include "File1.h"
#include "File2.h"

void getandprint() {
    Base *v = get_derived();
    funcprint(v);
}
```

`File2.cpp`:

```
#include "File2_corr.h"
#include "File1_corr.h"
#include <iostream>

class Base2 {
protected:
    short var2;
public:
```

```
    Base2() : var2(12) {}
};

class Derived : public Base2, public Base {
    float var_derived;

public:
    Derived() : Base2(), Base(), var_derived(1.2f) {}
    void do_something()
    {
        std::cout << "var_derived: "
                    << var_derived << ", var : " << var
                    << ", var2: " << var2 << std::endl;
    }
};

void funcprint(Base *d) {
    Derived *temp = dynamic_cast<Derived*>(d);
    if(temp) {
        d->do_something();
    }
    else {
        //Handle error
    }
}

Base *get_derived() {
    return new Derived;
}
```

## Result Information

**Group:** Object Oriented

**Language:** C++

**Default:** On

**Command-Line Syntax:** INCOMPLETE\_CLASS\_PTR

**Impact:** Medium

**CERT C++ ID:** EXP57-CPP

## **See Also**

Delete of void\* Pointer | MISRA C++:2008 Rule 5-2-4 | MISRA C++:2008 Rule 5-2-7 | MISRA C++:2008 Rule 5-2-8

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Inconsistent cipher operations

You perform encryption and decryption steps in succession with the same cipher context without a reinitialization in between

## Description

**Inconsistent cipher operations** occurs when you perform an encryption and decryption step with the same cipher context. You do not reinitialize the context in between those steps. The checker applies to symmetric encryption only.

For instance, you set up a cipher context for decryption using `EVP_DecryptInit_ex`.

```
EVP_DecryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);
```

However, you use the context for encryption using `EVP_EncryptUpdate`.

```
EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
```

## Risk

Mixing up encryption and decryption steps can lead to obscure code. It is difficult to determine at a glance whether the current cipher context is used for encryption or decryption. The mixup can also lead to race conditions, failed encryption, and unexpected ciphertext.

## Fix

After you set up a cipher context for a certain family of operations, use the context for only that family of operations.

For instance, if you set up a cipher context for decryption using `EVP_DecryptInit_ex`, use the context afterward for decryption only.

## Examples

### Encryption Step Following Decryption Step

```
#include <openssl/evp.h>
#include <stdlib.h>

/* Using the cryptographic routines */

unsigned char *out_buf;
int out_len;
unsigned char g_key[16];
unsigned char g_iv[16];
void func(unsigned char* src, int len) {

    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);

    /* Cipher context set up for decryption*/
    EVP_DecryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, g_key, g_iv);

    /* Update step for encryption */
    EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
}
```

In this example, the cipher context `ctx` is set up for decryption using `EVP_DecryptInit_ex`. However, immediately afterward, the context is used for encryption using `EVP_EncryptUpdate`.

One possible correction is to change the setup step. If you want to use the cipher context for encryption, set it up using `EVP_EncryptInit_ex`.

```
#include <openssl/evp.h>
#include <stdlib.h>

unsigned char *out_buf;
int out_len;
```

```
unsigned char g_key[16];
unsigned char g_iv[16];

void func(unsigned char* src, int len) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);

    /* Cipher context set up for encryption*/
    EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, g_key, g_iv);

    /* Update step for encryption */
    EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_BAD\_FUNCTION

**Impact:** Medium

**CWE ID:** 372, 664

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Incorrect data type passed to `va_arg`

Data type of variadic function argument does not match type in `va_arg` call

### Description

**Incorrect data type passed to `va_arg`** when the data type in a `va_arg` call does not match the data type of the variadic function argument that `va_arg` reads.

For instance, you pass an `unsigned char` argument to a variadic function `func`. Because of default argument promotion, the argument is promoted to `int`. When you use a `va_arg` call that reads an `unsigned char` argument, a type mismatch occurs.

```
void func (int n, ...) {
    ...
    va_list args;
    va_arg(args, unsigned char);
    ...
}

void main(void) {
    unsigned char c;
    func(1,c);
}
```

### Risk

In a variadic function (function with variable number of arguments), you use `va_arg` to read each argument from the variable argument list (`va_list`). The `va_arg` use does not guarantee that there actually exists an argument to read or that the argument data type matches the data type in the `va_arg` call. You have to make sure that both conditions are true.

Reading an incorrect type with a `va_arg` call can result in undefined behavior. Because function arguments reside on the stack, you might access an unwanted area of the stack.

## Fix

Make sure that the data type of the argument passed to the variadic function matches the data type in the `va_arg` call.

Arguments of a variadic function undergo default argument promotions. The argument data types of a variadic function cannot be determined from a prototype. The arguments of such functions undergo default argument promotions (see Sec. 6.5.2.2 and 7.15.1.1 in the C99 Standard). Integer arguments undergo integer promotion and arguments of type `float` are promoted to `double`. For integer arguments, if a data type can be represented by an `int`, for instance, `char` or `short`, it is promoted to an `int`. Otherwise, it is promoted to an `unsigned int`. All other arguments do not undergo promotion.

## Examples

### char Used as Function Argument Type and va\_arg argument

```
#include <stdarg.h>
#include <stdio.h>

unsigned char func(size_t count, ...) {
    va_list ap;
    unsigned char result = 0;
    va_start(ap, count);
    if (count > 0) {
        result = va_arg(ap, unsigned char);
    }
    va_end(ap);
    return result;
}

void func_caller(void) {
    unsigned char c = 0x12;
    (void)func(1, c);
}
```

In this example, `func` takes an `unsigned char` argument, which undergoes default argument promotion to `int`. The data type in the `va_arg` call is still `unsigned char`, which does not match the `int` argument type.

One possible correction is to read an `int` argument with `va_arg`.

```
#include <stdarg.h>
#include <stdio.h>

unsigned char func(size_t count, ...) {
    va_list ap;
    unsigned char result = 0;
    va_start(ap, count);
    if (count > 0) {
        result = va_arg(ap, int);
    }
    va_end(ap);
    return result;
}

void func_caller(void) {
    unsigned char c = 0x12;
    (void)func(1, c);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `VA_ARG_INCORRECT_TYPE`

**Impact:** Medium

**CWE ID:** 686

**CERT C ID:** EXP47-C

**CERT C++ ID:** EXP47-C

## See Also

Invalid `va_list` argument | Too many `va_arg` calls for current argument list

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Incorrect key for cryptographic algorithm

Public key cryptography operation is not supported by the algorithm used in context initialization

### Description

**Incorrect key for cryptographic algorithm** occurs when you initialize a context object with a key for a specific algorithm but perform an operation that the algorithm does not support.

For instance, you initialize the context with a key for the DSA algorithm.

```
ret = EVP_PKEY_set1_DSA(pkey, dsa);  
ctx = EVP_PKEY_CTX_new(pkey, NULL);
```

However, you use the context for encrypting data, an operation that the DSA algorithm does not support.

```
ret = EVP_PKEY_encrypt(ctx, out, &out_len, in, in_len);
```

### Risk

If the algorithm does not support your cryptographic operation, you do not see the expected results. For instance, if you use the DSA algorithm for encryption, you might get unexpected ciphertext.

### Fix

Use the algorithm that is appropriate for the cryptographic operation that you want to perform:

- Diffie-Hellman (DH): For key derivation.
- Digital Signature Algorithm (DSA): For signature.
- RSA: For encryption and signature.
- Elliptic curve (EC): For key derivation and signature.

## Examples

### Encryption with DSA Algorithm

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(unsigned char *src, size_t len, DSA * dsa){
    EVP_PKEY_CTX *ctx;
    EVP_PKEY *pkey = NULL;

    pkey = EVP_PKEY_new();
    if(pkey == NULL) fatal_error();

    ret = EVP_PKEY_set1_DSA(pkey, dsa);
    if (ret <= 0) fatal_error();

    ctx = EVP_PKEY_CTX_new(pkey, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_encrypt_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_encrypt(ctx, out_buf, &out_len, src, len);
}
```

In this example, the context object is initialized with a key associated with the DSA algorithm. However, the object is used for encryption, an operation that the DSA algorithm does not support.

One possible correction is to initialize the context object with a key associated with the RSA algorithm.

```
#include <openssl/evp.h>
#include <openssl/rsa.h>
```

```
#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(unsigned char *src, size_t len, RSA * rsa){
    EVP_PKEY_CTX *ctx;
    EVP_PKEY *pkey = NULL;

    pkey = EVP_PKEY_new();
    if(pkey == NULL) fatal_error();

    ret = EVP_PKEY_set1_RSA(pkey,rsa);
    if (ret <= 0) fatal_error();

    ctx = EVP_PKEY_CTX_new(pkey, NULL); /* RSA key is set in the context */
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_encrypt_init(ctx); /* Encryption operation is set in the context */
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_OAEP_PADDING);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_encrypt(ctx, out_buf, &out_len, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_PKEY\_INCORRECT\_KEY

**Impact:** Medium

**CWE ID:** 310, 325, 573, 664

## See Also

Context initialized incorrectly for cryptographic operation | Missing parameters for key generation | Missing data for encryption, decryption or signing operation | Missing peer key | Missing private key | Missing public key | Nonsecure parameters for key generation

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Incorrect order of network connection operations

Socket is not correctly established due to bad order of connection steps or missing steps

### Description

**Incorrect order of network connection operations** occurs when you perform operations on a network connection at the wrong point of the connection lifecycle.

### Risk

Sending or receiving data to an incorrectly connected socket can cause unexpected behavior or disclosure of sensitive information.

If you do not connect your socket correctly or change the connection by mistake, you can send sensitive data to an unexpected port. You can also get unexpected data from an incorrect socket.

### Fix

During socket connection and communication, check the return of each call and the length of the data.

Before reading, writing, sending, or receiving information, create sockets in this order:

- For a connection-oriented server socket (SOCK\_STREAM or SOCK\_SEQPACKET):

```
socket(...);  
bind(...);  
listen(...);  
accept(...);
```

- For a connectionless server socket (SOCK\_DGRAM):

```
socket(...);  
bind(...);
```

- For a client socket (connection-oriented or connectionless):

```
socket(...);  
connect(...);
```

## Examples

### Connecting a Connection-Oriented Server Socket

```
# include <stdio.h>  
# include <string.h>  
# include <time.h>  
# include <arpa/inet.h>  
# include <unistd.h>  
  
enum { BUF_SIZE=1025 };  
  
volatile int rd;  
  
int stream_socket_server(int argc, char *argv[])  
{  
    int listenfd = 0, connfd = 0;  
    struct sockaddr_in serv_addr;  
  
    char sendBuff[BUF_SIZE];  
    time_t ticks;  
    struct tm * timeinfo;  
  
    listenfd = socket(AF_INET, SOCK_STREAM, 0);  
    memset(&serv_addr, 48, sizeof(serv_addr));  
    memset(sendBuff, 48, sizeof(sendBuff));  
  
    serv_addr.sin_family = AF_INET;  
    serv_addr.sin_addr.s_addr = htonl(INADDR_ANY);  
    serv_addr.sin_port = htons(5000);  
  
    bind(listenfd, (struct sockaddr*)&serv_addr, sizeof(serv_addr));  
  
    listen(listenfd, 10);  
  
    while(1)  
    {
```

```
        connfd = accept(listenfd, (struct sockaddr*)NULL, NULL);

        ticks = time(NULL);
        timeinfo = localtime(&ticks);
        strftime (sendBuff, BUF_SIZE, "%I:%M%p.", timeinfo);

        write(listenfd, sendBuff, strlen(sendBuff));

        close(connfd);
        sleep(1);
    }
}
```

This example creates a connection-oriented network connection. The function calls the correct functions in the correct order: `socket`, `bind`, `listen`, `accept`. However, the program should write to the `connfd` socket instead of the `listenfd` socket.

One possible correction is to write to the `connfd` function instead of the `listenfd` socket.

```
# include <stdio.h>
# include <string.h>
# include <time.h>
# include <arpa/inet.h>
# include <unistd.h>

enum { BUF_SIZE=1025 };

volatile int rd;

int stream_socket_server_good(int argc, char *argv[])
{
    int listenfd = 0, connfd = 0;
    struct sockaddr_in serv_addr;

    char sendBuff[BUF_SIZE];
    time_t ticks;
    struct tm * timeinfo;

    listenfd = socket(AF_INET, SOCK_STREAM, 0);
    memset(&serv_addr, 48, sizeof(serv_addr));
    memset(sendBuff, 48, sizeof(sendBuff));

    serv_addr.sin_family = AF_INET;
```

```
serv_addr.sin_addr.s_addr = htonl(INADDR_ANY);
serv_addr.sin_port = htons(5000);

bind(listenfd, (struct sockaddr*)&serv_addr, sizeof(serv_addr));
listen(listenfd, 10);

while(1)
{
    connfd = accept(listenfd, (struct sockaddr*)NULL, NULL);
    ticks = time(NULL);
    timeinfo = localtime(&ticks);
    strftime (sendBuff, BUF_SIZE, "%I:%M%p.", timeinfo);
    write(connfd, sendBuff, strlen(sendBuff));
    close(connfd);
    sleep(1);
}
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BAD\_NETWORK\_CONNECT\_ORDER

**Impact:** Medium

**CWE ID:** 666

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Incorrect pointer scaling

Implicit scaling in pointer arithmetic might be ignored

### Description

**Incorrect pointer scaling** occurs when Polyspace Bug Finder considers that you are ignoring the implicit scaling in pointer arithmetic.

For instance, the defect can occur in the following situations.

Situation	Risk	Possible Fix
You use the <code>sizeof</code> operator in arithmetic operations on a pointer.	The <code>sizeof</code> operator returns the size of a data type in number of bytes.  Pointer arithmetic is already implicitly scaled by the size of the data type of the pointed variable. Therefore, the use of <code>sizeof</code> in pointer arithmetic produces unintended results.	Do not use <code>sizeof</code> operator in pointer arithmetic.
You perform arithmetic operations on a pointer, and then apply a cast.	Pointer arithmetic is implicitly scaled. If you do not consider this implicit scaling, casting the result of a pointer arithmetic produces unintended results.	Apply the cast before the pointer arithmetic.

## Examples

### Use of sizeof Operator

```
void func(void) {
    int arr[5] = {1,2,3,4,5};
    int *ptr = arr;

    int value_in_position_2 = *(ptr + 2*(sizeof(int)));
}
```

In this example, the operation `2*(sizeof(int))` returns twice the size of an `int` variable in bytes. However, because pointer arithmetic is implicitly scaled, the number of bytes by which `ptr` is offset is `2*(sizeof(int))*(sizeof(int))`.

In this example, the incorrect scaling shifts `ptr` outside the bounds of the array. Therefore, a **Pointer access out of bounds** error appears on the `*` operation.

One possible correction is to remove the `sizeof` operator.

```
void func(void) {
    int arr[5] = {1,2,3,4,5};
    int *ptr = arr;

    int value_in_position_2 = *(ptr + 2);
}
```

### Cast Following Pointer Arithmetic

```
int func(void) {
    int x = 0;
    char r = *(char *)&x + 1;
    return r;
}
```

In this example, the operation `&x + 1` offsets `&x` by `sizeof(int)`. Following the operation, the resulting pointer points outside the allowed buffer. When you dereference the pointer, a **Pointer access out of bounds** error appears on the `*` operation.

If you want to access the second byte of `x`, first cast `&x` to a `char*` pointer and then perform the pointer arithmetic. The resulting pointer is offset by `sizeof(char)` bytes and still points within the allowed buffer, whose size is `sizeof(int)` bytes.

```
int func(void) {  
    int x = 0;  
    char r = *((char *)&x + 1);  
    return r;  
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** BAD\_PTR\_SCALING

**Impact:** Medium

**CWE ID:** 468

**CERT C ID:** ARR39-C, EXP08-C

**CERT C++ ID:** ARR39-C

**ISO/IEC TS 17961 ID:** libptr

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Incorrect syntax of flexible array member size

Flexible array member defined with size zero or one

## Description

**Incorrect syntax of flexible array member size** occurs when you do not use the standard C syntax to define a structure with a flexible array member.

Since C99, you can define a flexible array member with an unspecified size. For instance, `desc` is a flexible array member in this example:

```
struct record {
    size_t len;
    double desc[];
};
```

Prior to C99, you might have used compiler-specific methods to define flexible arrays. For instance, you used arrays of size one or zero:

```
struct record {
    size_t len;
    double desc[0];
};
```

This usage is not compliant with the C standards following C99.

## Risk

If you define flexible array members by using size zero or one, your implementation is compiler-dependent. For compilers that do not recognize the syntax, an `int` array of size one has buffer for one `int` variable. If you try to write beyond this buffer, you can run into issues stemming from array access out of bounds.

If you use the standard C syntax to define a flexible array member, your implementation is portable across all compilers conforming with the standard.

## Fix

To implement a flexible array member in a structure, define an array of unspecified size. The structure must have one member besides the array and the array must be the last member of the structure.

## Examples

### Flexible Array Member Defined with Size One

```
#include <stdlib.h>

struct flexArrayStruct {
    int num;
    int data[1];
};

unsigned int max_size = 100;

void func(unsigned int array_size) {
    if(array_size<= 0 || array_size > max_size)
        exit(1);
    /* Space is allocated for the struct */
    struct flexArrayStruct *structP
        = (struct flexArrayStruct *)
        malloc(sizeof(struct flexArrayStruct)
            + sizeof(int) * (array_size - 1));
    if (structP == NULL) {
        /* Handle malloc failure */
        exit(2);
    }

    structP->num = array_size;

    /*
     * Access data[] as if it had been allocated
     * as data[array_size].
     */
    for (unsigned int i = 0; i < array_size; ++i) {
        structP->data[i] = 1;
    }
}
```

```
    free(structP);  
}
```

In this example, the flexible array member `data` is defined with a size value of one. Compilers that do not recognize this syntax treat `data` as a size-one array. The statement `structP->data[i] = 1;` can write to `data` beyond the first array member and cause out of bounds array issues.

Define flexible array members with unspecified size.

```
#include <stdlib.h>  
  
struct flexArrayStruct{  
    int num;  
    int data[];  
};  
  
unsigned int max_size = 100;  
  
void func(unsigned int array_size) {  
    if(array_size<=0 || array_size > max_size)  
        exit(1);  
  
    /* Allocate space for structure */  
    struct flexArrayStruct *structP  
        = (struct flexArrayStruct *)  
        malloc(sizeof(struct flexArrayStruct)  
            + sizeof(int) * array_size);  
  
    if (structP == NULL) {  
        /* Handle malloc failure */  
        exit(2);  
    }  
  
    structP->num = array_size;  
  
    /*  
     * Access data[] as if it had been allocated  
     * as data[array_size].  
     */  
    for (unsigned int i = 0; i < array_size; ++i) {  
        structP->data[i] = 1;  
    }  
}
```

```
    free(structP);  
}
```

## Result Information

**Group:** Good Practice

**Language:** C

**Default:** Off

**Command-Line Syntax:** FLEXIBLE\_ARRAY\_MEMBER\_INCORRECT\_SIZE

**Impact:** Low

**CERT C ID:** DCL38-C

## See Also

Hard-coded buffer size | Memory leak | Misuse of structure with flexible array member | Pointer access out of bounds | Unprotected dynamic memory allocation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Information leak via structure padding

Padding bytes can contain sensitive information

## Description

**Information leak via structure padding** occurs when you do not initialize the padding data of a structure or union before passing it across a trust boundary. A compiler adds padding bytes to the structure or union to ensure a proper memory alignment of its members. The bit-fields of the storage units can also have padding bits.

**Information leak via structure padding** raises a defect when:

- You call an untrusted function with structure or union pointer type argument containing uninitialized padding data.

All external functions are considered untrusted.

- You copy or assign a structure or union containing uninitialized padding data to an untrusted object.

All external structure or union objects, the output parameters of all externally linked functions, and the return pointer of all external functions are considered untrusted objects.

## Risk

The padding bytes of the passed structure or union might contain sensitive information that an untrusted source can access.

## Fix

- Prevent the addition of padding bytes for memory alignment by using the `pack` pragma or attribute supported by your compiler.
- Explicitly declare and initialize padding bytes as fields within the structure or union.
- Explicitly declare and initialize bit-fields corresponding to padding bits, even if you use the `pack` pragma or attribute supported by your compiler.

## Examples

### Structure with Padding Bytes Passed to External Function

```
#include <stddef.h>
#include <stdlib.h>
#include <string.h>

typedef struct s_padding
{
    /* Padding bytes may be introduced between
     * 'char c' and 'int i'
     */
    char c;
    int i;

    /*Padding bits may be introduced around the bit-fields
     * even if you use "#pragma pack" (Windows) or
     * __attribute__((__packed__)) (GNU)*/

    unsigned int bf1:1;
    unsigned int bf2:2;
    unsigned char buffer[20];
} S_Padding ;

/* External function */
extern void copy_object(void *out, void *in, size_t s);

void func(void *out_buffer)
{
    /*Padding bytes not initialized*/

    S_Padding s = {'A', 10, 1, 3, {}};
    /*Structure passed to external function*/

    copy_object((void *)out_buffer, (void *)&s, sizeof(s));
}

void main(void)
{
    S_Padding s1;
```

```

    func(&s1);
}

```

In this example, structure `s1` can have padding bytes between the `char c` and `int i` members. The bit-fields of the storage units of the structure can also contain padding bits. The content of the padding bytes and bits is accessible to an untrusted source when `s1` is passed to `func`.

One possible correction in Microsoft Visual Studio is to use `#pragma pack()` to prevent padding bytes between the structure members. To prevent padding bits in the bit-fields of `s1`, explicitly declare and initialize the bit-fields even if you use `#pragma pack()`.

```

#include <stddef.h>
#include <stdlib.h>
#include <string.h>
#include <limits.h>

#define CHAR_BIT 8

#pragma pack(push, 1)

typedef struct s_padding
{
/*No Padding bytes when you use "#pragma pack" (Windows) or
* __attribute__((__packed__)) (GNU)*/
    char c;
    int i;
    unsigned int bf1:1;
    unsigned int bf2:2;
/* Padding bits explicitly declared */
    unsigned int bf_filler : sizeof(unsigned) * CHAR_BIT - 3;
    unsigned char buffer[20];
}

    S_Padding;

#pragma pack(pop)

/* External function */
extern void copy_object(void *out, void *in, size_t s);

```

```
void func(void *out_buffer)
{
    S_Padding s = {'A', 10, 1, 3, 0 /* padding bits */, {}};
    copy_object((void *)out_buffer, (void *)&s, sizeof(s));
}

void main(void)
{
    S_Padding s1;
    func(&s1);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** PADDING\_INFO\_LEAK

**Impact:** Low

**CERT C ID:** DCL39-C

**CERT C++ ID:** DCL39-C

## See Also

### Topics

Memory comparison of padding data

Large pass-by-value argument

Use of memset with size argument zero

Invalid assumptions about memory organization

Sensitive heap memory not cleared before release

Uncleared sensitive data in stack

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

# Inline constraint not respected

Modifiable static variable is modified in nonstatic inline function

## Description

**Inline constraint not respected** occurs when you refer to a file scope modifiable static variable or define a local modifiable static variable in a nonstatic inlined function. The checker considers a variable as modifiable if it is not `const`-qualified.

For instance, `var` is a modifiable `static` variable defined in an `inline` function `func`. `g_step` is a file scope modifiable static variable referred to in the same inlined function.

```
static int g_step;
inline void func (void) {
    static int var = 0;
    var += g_step;
}
```

## Risk

When you modify a static variable in multiple function calls, you expect to modify the same variable in each call. For instance, each time you call `func`, the same instance of `var1` is incremented but a separate instance of `var2` is incremented.

```
void func(void) {
    static var1 = 0;
    var2 = 0;
    var1++;
    var2++;
}
```

If a function has an inlined and non-inlined definition (in separate files), when you call the function, the C standard allows compilers to use either the inlined or the non-inlined form (see ISO/IEC 9899:2011, sec. 6.7.4). If your compiler uses an inlined definition in one call and the non-inlined definition in another, you are no longer modifying the same variable in both calls. This behavior defies the expectations from a static variable.

## Fix

Use one of these fixes:

- If you do not intend to modify the variable, declare it as `const`.

If you do not modify the variable, there is no question of unexpected modification.

- Make the variable `non-static`. Remove the `static` qualifier from the declaration.

If the variable is defined in the function, it becomes a regular local variable. If defined at file scope, it becomes an extern variable. Make sure that this change in behavior is what you intend.

- Make the function `static`. Add a `static` qualifier to the function definition.

If you make the function `static`, the file with the inlined definition always uses the inlined definition when the function is called. Other files use another definition of the function. The question of which function definition gets used is not left to the compiler.

## Examples

### Static Variable Use in Inlined and External Definition

```
/* file1.c : contains inline definition of get_random()*/
```

```
inline unsigned int get_random(void)
{
    static unsigned int m_z = 0xdeadbeef;
    static unsigned int m_w = 0xbaddecaf;

    /* Compute next pseudorandom value and update seeds */
    m_z = 36969 * (m_z & 65535) + (m_z >> 16);
    m_w = 18000 * (m_w & 65535) + (m_w >> 16);
    return (m_z << 16) + m_w;
}
```

```
int call_get_random(void)
{
    unsigned int rand_no;
```

```

int ii;
for (ii = 0; ii < 100; ii++) {
    rand_no = get_random();
}
rand_no = get_random();
return 0;
}

/* file2.c : contains external definition of get_random()*/

extern unsigned int get_random(void)
{
    /* Initialize seeds */
    static unsigned int m_z = 0xdeadbeef;
    static unsigned int m_w = 0xbaddecaf;

    /* Compute next pseudorandom value and update seeds */
    m_z = 36969 * (m_z & 65535) + (m_z >> 16);
    m_w = 18000 * (m_w & 65535) + (m_w >> 16);
    return (m_z << 16) + m_w;
}

```

In this example, `get_random()` has an inline definition in `file1.c` and an external definition in `file2.c`. When `get_random` is called in `file1.c`, compilers are free to choose whether to use the inline or the external definition.

Depending on the definition used, you might or might not modify the version of `m_z` and `m_w` in the inlined version of `get_random()`. This behavior contradicts the usual expectations from a static variable. When you call `get_random()`, you expect to always modify the same `m_z` and `m_w`.

One possible correction is to make the inlined `get_random()` static. Irrespective of your compiler, calls to `get_random()` in `file1.c` then use the inlined definition. Calls to `get_random()` in other files use the external definition. This fix removes the ambiguity about which definition is used and whether the static variables in that definition are modified.

```

/* file1.c : contains inline definition of get_random()*/

static inline unsigned int get_random(void)
{
    static unsigned int m_z = 0xdeadbeef;

```

```
static unsigned int m_w = 0xbaddecaf;

/* Compute next pseudorandom value and update seeds */
m_z = 36969 * (m_z & 65535) + (m_z >> 16);
m_w = 18000 * (m_w & 65535) + (m_w >> 16);
return (m_z << 16) + m_w;
}

int call_get_random(void)
{
    unsigned int rand_no;
    int ii;
    for (ii = 0; ii < 100; ii++) {
        rand_no = get_random();
    }
    rand_no = get_random();
    return 0;
}

/* file2.c : contains external definition of get_random()*/

extern unsigned int get_random(void)
{
    /* Initialize seeds */
    static unsigned int m_z = 0xdeadbeef;
    static unsigned int m_w = 0xbaddecaf;

    /* Compute next pseudorandom value and update seeds */
    m_z = 36969 * (m_z & 65535) + (m_z >> 16);
    m_w = 18000 * (m_w & 65535) + (m_w >> 16);
    return (m_z << 16) + m_w;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `INLINE_CONSTRAINT_NOT_RESPECTED`

**Impact:** Medium

**CERT C ID:** MSC40-C

**CERT C++ ID:** DCL60-CPP, MSC40-C

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Integer constant overflow

Constant value falls outside range of integer data type

### Description

**Integer constant overflow** occurs when you assign a compile-time constant to a signed integer variable whose data type cannot accommodate the value. An  $n$ -bit signed integer holds values in the range  $[-2^{n-1}, 2^{n-1}-1]$ .

For instance, `c` is an 8-bit signed `char` variable that cannot hold the value 255.

```
signed char c = 255;
```

To determine the sizes of fundamental types, Bug Finder uses your specification for Target processor type (`-target`).

### Risk

The default behavior for constant overflows can vary between compilers and platforms. Retaining constant overflows can reduce the portability of your code.

Even if your compilers wraps around overflowing constants with a warning, the wrap-around behavior can be unintended and cause unexpected results.

### Fix

Check if the constant value is what you intended. If the value is correct, use a different, possibly wider, data type for the variable.

## Examples

### Overflowing Constant from Macro Expansion

```
#define MAX_UNSIGNED_CHAR 255  
#define MAX_SIGNED_CHAR 127
```

```
void main() {
    char c1 = MAX_UNSIGNED_CHAR;
    char c2 = MAX_SIGNED_CHAR+1;
}
```

In this example, the defect appears on the macros because at least one use of the macro causes an overflow. To reproduce these defects, use a `Target processor type (-target)` where `char` is signed by default.

One possible correction is to use a different data type for the variables that overflow.

```
#define MAX_UNSIGNED_CHAR 255
#define MAX_SIGNED_CHAR 127

void main() {
    unsigned char c1 = MAX_UNSIGNED_CHAR;
    unsigned char c2 = MAX_SIGNED_CHAR+1;
}
```

## Result Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** INT\_CONSTANT\_OVFL

**Impact:** Medium

**CWE ID:** 128, 189, 190, 191

**CERT C ID:** INT00-C, INT08-C, INT18-C, INT32-C, MSC15-C

**CERT C++ ID:** INT32-C

**ISO/IEC TS 17961 ID:** intoflow

## See Also

[Integer conversion overflow](#) | [Integer overflow](#) | [Sign change integer conversion overflow](#) | [Unsigned integer constant overflow](#) | [Unsigned integer conversion overflow](#) | [Unsigned integer overflow](#)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Integer conversion overflow

Overflow when converting between integer types

## Description

**Integer conversion overflow** occurs when converting an integer to a smaller integer type. If the variable does not have enough bytes to represent the original constant, the conversion overflows.

The exact storage allocation for different integer types depends on your processor. See Target processor type (-target).

## Examples

### Converting from `int` to `char`

```
char convert(void) {  
    int num = 1000000;  
    return (char)num;  
}
```

In the return statement, the integer variable `num` is converted to a `char`. However, an 8-bit or 16-bit character cannot represent 1000000 because it requires at least 20 bits. So the conversion operation overflows.

One possible correction is to convert to a different integer type that can represent the entire number.

```
long convert(void) {  
    int num = 1000000;  
    return (long)num;  
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** INT\_CONV\_OVFL

**Impact:** High

**CWE ID:** 128, 189, 190, 191, 192, 197

**CERT C ID:** FIO37-C, FLP34-C, INT02-C, INT12-C, INT18-C, INT31-C

**CERT C++ ID:** FIO37-C, FLP34-C, INT31-C

## See Also

Float conversion overflow|Unsigned integer conversion overflow|Sign change integer conversion overflow|Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Integer division by zero

Dividing integer number by zero

## Description

**Integer division by zero** occurs when the denominator of a division or modulo operation can be a zero-valued integer.

## Examples

### Dividing an Integer by Zero

```
int fraction(int num)
{
    int denom = 0;
    int result = 0;

    result = num/denom;

    return result;
}
```

A division by zero error occurs at `num/denom` because `denom` is zero.

```
int fraction(int num)
{
    int denom = 0;
    int result = 0;

    if (denom != 0)
        result = num/denom;

    return result;
}
```

Before dividing, add a test to see if the denominator is zero, checking before division occurs. If `denom` is always zero, this correction can produce a dead code defect in your Polyspace results.

One possible correction is to change the denominator value so that `denom` is not zero.

```
int fraction(int num)
{
    int denom = 2;
    int result = 0;

    result = num/denom;

    return result;
}
```

## Modulo Operation with Zero

```
int mod_arr(int input)
{
    int arr[5];
    for(int i = 0; i < 5; i++)
    {
        arr[i] = input % i;
    }

    return arr[0]+arr[1]+arr[2]+arr[3]+arr[4];
}
```

In this example, Polyspace flags the modulo operation as a division by zero. Because modulo is inherently a division operation, the divisor (right hand argument) cannot be zero. The modulo operation uses the `for` loop index as the divisor. However, the `for` loop starts at zero, which cannot be an iterator.

One possible correction is checking the divisor before the modulo operation. In this example, see if the index `i` is zero before the modulo operation.

```
int mod_arr(int input)
{
    int arr[5];
    for(int i = 0; i < 5; i++)
    {
```

```
        if(i != 0)
        {
            arr[i] = input % i;
        }
        else
        {
            arr[i] = input;
        }
    }

    return arr[0]+arr[1]+arr[2]+arr[3]+arr[4];
}
```

Another possible correction is changing the divisor to a nonzero integer. In this example, add one to the index before the % operation to avoid dividing by zero.

```
int mod_arr(int input)
{
    int arr[5];
    for(int i = 0; i < 5; i++)
    {
        arr[i] = input % (i+1);
    }

    return arr[0]+arr[1]+arr[2]+arr[3]+arr[4];
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** INT\_ZERO\_DIV

**Impact:** High

**CWE ID:** 189, 369

**CERT C ID:** INT33-C

**CERT C++ ID:** INT33-C

**ISO/IEC TS 17961 ID:** diverr

## **See Also**

### **Polyspace Analysis Options**

Find defects (-checkers)

### **Polyspace Results**

Float division by zero on page 3-221

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### **Introduced in R2013b**

# Integer overflow

Overflow from operation between integers

## Description

**Integer overflow** occurs when an operation on integer variables can result in values that cannot be represented by the result data type. The data type of a variable determines the number of bytes allocated for the variable storage and constrains the range of allowed values.

The exact storage allocation for different integer types depends on your processor. See `Target processor type (-target)`.

## Examples

### Addition of Maximum Integer

```
#include <limits.h>

int plusplus(void) {
    int var = INT_MAX;
    var++;
    return var;
}
```

In the third statement of this function, the variable `var` is increased by one. But the value of `var` is the maximum integer value, so an `int` cannot represent one plus the maximum integer value.

One possible correction is to change data types. Store the result of the operation in a larger data type (Note that on a 32-bit machine, `int` and `long` has the same size). In this example, on a 32-bit machine, by returning a `long long` instead of an `int`, the overflow error is fixed.

```
#include <limits.h>

long long plusplus(void) {
    long long lvar = INT_MAX;
    lvar++;
    return lvar;
}
```

### Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** INT\_OVFL

**Impact:** Medium

**CWE ID:** 128, 189, 190, 191, 192

**CERT C ID:** FIO37-C, INT00-C, INT08-C, INT18-C, INT32-C, MSC15-C

**CERT C++ ID:** FIO37-C, INT32-C

**ISO/IEC TS 17961 ID:** intoflow

### See Also

#### Polyspace Analysis Options

Find defects (-checkers)

#### Polyspace Results

Unsigned integer overflow|Float overflow

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Invalid assumptions about memory organization

Address is computed by adding or subtracting from address of a variable

## Description

**Invalid assumptions about memory organization** occurs when you compute the address of a variable in the stack by adding or subtracting from the address of another non-array variable.

## Risk

When you compute the address of a variable in the stack by adding or subtracting from the address of another variable, you assume a certain memory organization. If your assumption is incorrect, accessing the computed address can be invalid.

## Fix

Do not perform an access that relies on assumptions about memory organization.

## Examples

### Reliance on Memory Organization

```
void func(void) {  
    int var1 = 0x00000011, var2;  
    *(&var1 + 1) = 0;  
}
```

In this example, the programmer relies on the assumption that `&var1 + 1` provides the address of `var2`. Therefore, an **Invalid assumptions about memory organization** appears on the `+` operation. In addition, a **Pointer access out of bounds** error also appears on the dereference.

One possible correction is not perform direct computation on addresses to access separately declared variables.

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** INVALID\_MEMORY\_ASSUMPTION

**Impact:** Medium

**CWE ID:** 188

**CERT C ID:** ARR37-C

**CERT C++ ID:** ARR37-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Integer precision exceeded

Operation using integer size instead of precision can cause undefined behavior

## Description

**Integer precision exceeded** occurs when an integer expression uses the integer size in an operation that exceeds the integer precision. On some architectures, the size of an integer in memory can include sign and padding bits. On these architectures, the integer size is larger than the precision which is just the number of bits that represent the value of the integer.

## Risk

Using the size of an integer in an operation on the integer precision can result in integer overflow, wrap around, or unexpected results. For instance, an unsigned integer can be stored in memory in 64 bits, but uses only 48 bits to represent its value. A 56 bits left-shift operation on this integer is undefined behavior.

Assuming that the size of an integer is equal to its precision can also result in program portability issues between different architectures.

## Fix

Do not use the size of an integer instead of its precision. To determine the integer precision, implement a precision computation routine or use a builtin function such as `__builtin_popcount()`.

## Examples

### Using Size of unsigned int for Left Shift Operation

```
#include <limits.h>

unsigned int func(unsigned int exp)
```

```
{
    if (exp >= sizeof(unsigned int) * CHAR_BIT) {
        /* Handle error */
    }
    return 1U << exp;
}
```

In this example, the function uses a left shift operation to return the value of 2 raised to the power of `exp`. The operation shifts the bits of 1U by `exp` positions to the left. The `if` statement ensures that the operation does not shift the bits by a number of positions `exp` greater than the size of an `unsigned int`. However, if `unsigned int` contains padding bits, the value returned by `sizeof()` is larger than the precision of `unsigned int`. As a result, some values of `exp` might be too large, and the shift operation might be undefined behavior.

One possible correction is to implement a function `popcount()` that computes the precision of `unsigned int` by counting the number of set bits.

```
#include <stddef.h>
#include <stdint.h>
#include <limits.h>

size_t popcount(uintmax_t);
#define PRECISION(umax_value) popcount(umax_value)
```

```
unsigned int func(unsigned int exp)
{
    if (exp >= PRECISION(UINT_MAX)) {
        /* Handle error */
    }
    return 1 << exp;
}
```

```
size_t popcount(uintmax_t num)
{
    size_t precision = 0;
    while (num != 0) {
        if (num % 2 == 1) {
            precision++;
        }
        num /= 2;
    }
    return precision;
}
```

```
    }  
    num >>= 1;  
  }  
  return precision;  
}
```

## Result Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** INT\_PRECISION\_EXCEEDED

**Impact:** Low

**CWE ID:** 190

**CERT C ID:** INT35-C

**CERT C++ ID:** INT35-C

## See Also

Bitwise operation on negative value | Integer conversion overflow |  
Integer overflow | MISRA C:2012 Rule 10.1 | MISRA C:2012 Rule 10.2 |  
Possible invalid operation on boolean operand | Shift of a negative  
value | Shift operation overflow | Unsigned integer conversion overflow  
| Unsigned integer overflow

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

## Invalid deletion of pointer

Pointer deallocation using `delete` without corresponding allocation using `new`

### Description

**Invalid deletion of pointer** occurs when a block of memory released using the `delete` operator was not previously allocated with the `new` operator.

This defect applies only to C++ source files.

### Examples

#### Deleting Static Memory

```
void assign_ones(void)
{
    int ptr[10];

    for(int i=0;i<10;i++)
        *(ptr+i)=1;

    delete[] ptr;
}
```

The pointer `ptr` is released using the `delete` operator. However, `ptr` points to a memory location that was not dynamically allocated.

If the number of elements of the array `ptr` is known at compile time, one possible correction is to remove the deallocation of the pointer `ptr`.

```
void assign_ones(void)
{
    int ptr[10];

    for(int i=0;i<10;i++)
```

```
        *(ptr+i)=1;
    }
```

If the number of array elements is not known at compile time, one possible correction is to dynamically allocate memory to the array `ptr` using the `new` operator.

```
void assign_ones(int num)
{
    int *ptr = new int[num];

    for(int i=0; i < num; i++)
        *(ptr+i) = 1;

    delete[] ptr;
}
```

## Mismatched new and delete

```
int main (void)
{
    int *p_scale = new int[5];

    //more code using scal

    delete p_scale;
}
```

In this example, `p_scale` is initialized to an array of size 5 using `new int[5]`. However, `p_scale` is deleted with `delete` instead of `delete[]`. The `new-delete` pair does not match. Do not use `delete` without the brackets when deleting arrays.

One possible correction is to add brackets so the `delete` matches the `new []` declaration.

```
int main (void)
{
    int *p_scale = new int[5];

    //more code using p_scale

    delete[] p_scale;
}
```

Another possible correction is to change the declaration of `p_scale`. If you meant to initialize `p_scale` as 5 itself instead of an array of size 5, you must use different syntax. For this correction, change the square brackets in the initialization to parentheses. Leave the `delete` statement as it is.

```
int main (void)
{
    int *p_scale = new int(5);

    //more code using p_scale

    delete p_scale;
}
```

## Check Information

**Group:** Dynamic memory

**Language:** C++

**Default:** Off

**Command-Line Syntax:** BAD\_DELETE

**Impact:** High

**CWE ID:** 404

**CERT C++ ID:** MEM51-CPP

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Invalid free of pointer | Memory leak

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2013b

# Invalid file position

`fsetpos()` is invoked with a file position argument not obtained from `fgetpos()`

## Description

**Invalid file position** occurs when the file position argument of `fsetpos()` uses a value that is not obtained from `fgetpos()`.

## Risk

The function `fgetpos(FILE *stream, fpos_t *pos)` gets the current file position of the stream. When you use any other value as the file position argument of `fsetpos(FILE *stream, const fpos_t *pos)`, you might access an unintended location in the stream.

## Fix

Use the value returned from a successful call to `fgetpos()` as the file position argument of `fsetpos()`.

## Examples

### `memset()` Sets File Position Argument

```
#include <stdio.h>
#include <string.h>
#include <stdlib.h>

FILE *func(FILE *file)
{
    fpos_t offset;
    if (file == NULL)
    {
        /* Handle error */
    }
}
```

```
    }
    /* Store initial position in variable 'offset' */
    (void)memset(&offset, 0, sizeof(offset));

    /* Read data from file */

    /* Return to the initial position. offset was not
    returned from a call to fgetpos() */
    if (fsetpos(file, &offset) != 0)
    {
        /* Handle error */
    }
    return file;
}
```

In this example, `fsetpos()` uses `offset` as its file position argument. However, the value of `offset` is set by `memset()`. The preceding code might access the wrong location in the stream.

Call `fgetpos()`, and if it returns successfully, use the position argument in your call to `fsetpos()`.

```
#include <stdio.h>
#include <string.h>
#include <stdlib.h>

FILE *func(FILE *file)
{
    fpos_t offset;
    if (file == NULL)
    {
        /* Handle error */
    }
    /* Store initial position in variable 'offset'
    using fgetpos() */
    if (fgetpos(file, &offset) != 0)
    {
        /* Handle error */
    }

    /* Read data from file */
}
```

```
    /* Back to the initial position */  
    if (fsetpos(file, &offset) != 0)  
    {  
        /* Handle error */  
    }  
    return file;  
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** INVALID\_FILE\_POS

**Impact:** Medium

**CERT C ID:** FIO44-C

**CERT C++ ID:** FIO44-C

**ISO/IEC TS 17961 ID:** xfilepos

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Invalid free of pointer

Pointer deallocation without a corresponding dynamic allocation

### Description

**Invalid free of pointer** occurs when a block of memory released using the `free` function was not previously allocated using `malloc`, `calloc`, or `realloc`.

### Examples

#### Invalid Free of Pointer Error

```
#include <stdlib.h>

void Assign_Ones(void)
{
    int p[10];
    for(int i=0;i<10;i++)
        *(p+i)=1;

    free(p);
    /* Defect: p does not point to dynamically allocated memory */
}
```

The pointer `p` is deallocated using the `free` function. However, `p` points to a memory location that was not dynamically allocated.

If the number of elements of the array `p` is known at compile time, one possible correction is to remove the deallocation of the pointer `p`.

```
#include <stdlib.h>

void Assign_Ones(void)
{
    int p[10];
    for(int i=0;i<10;i++)
```

```
    *(p+i)=1;
/* Fix: Remove deallocation of p */
}
```

If the number of elements of the array `p` is not known at compile time, one possible correction is to dynamically allocate memory to the array `p`.

```
#include <stdlib.h>
```

```
void Assign_Ones(int num)
{
    int *p;
    /* Fix: Allocate memory dynamically to p */
    p=(int*) calloc(10,sizeof(int));
    for(int i=0;i<10;i++)
        *(p+i)=1;
    free(p);
}
```

## Check Information

**Group:** Dynamic Memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** BAD\_FREE

**Impact:** High

**CWE ID:** 404, 590, 762

**CERT C ID:** MEM00-C, MEM34-C

**CERT C++ ID:** MEM34-C, MEM51-CPP

**ISO/IEC TS 17961 ID:** xfree

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Invalid deletion of pointer

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Invalid use of == operator

Equality operation in assignment statement

## Description

**Invalid use of == operator** occurs when an equality operator instead of an assignment operator is used in a simple statement. A common correction is removing one of the equal signs (=).

## Examples

### Equality Evaluation in for-Loop

```
void populate_array(void)
{
    int i = 0;
    int j = 0;
    int array[4];

    for (j == 5; j < 9; j++) {
        array[i] = j;
        i++;
    }
}
```

Inside the for-loop, the statement `j == 5` tests whether `j` is equal to 5 instead of setting `j` to 5. The for-loop iterates from 0 to 8 because `j` starts with a value of 0, not 5. A by-product of the invalid equality operator is an out-of-bounds array access in the next line.

One possible correction is to change the `==` operator to a single equal sign (`=`). Changing the `==` sign resolves both defects because the for-loop iterates the intended number of times.

```
void populate_array(void)
{
    int i = 0;
```

```
int j = 0;
int array[4];

for (j = 5; j < 9; j++) {
    array[i] = j;
    i++;
}
}
```

### Check Information

**Group:** Programming

**Language:** C | C++

**Default:** On for handwritten code, off for generated code

**Command-Line Syntax:** BAD\_EQUAL\_EQUAL\_USE

**Impact:** High

**CWE ID:** 480, 482

### See Also

#### Polyspace Analysis Options

Find defects (-checkers)

#### Polyspace Results

Invalid use of = operator

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Invalid use of = operator

Assignment in conditional statement

## Description

**Invalid use of = operator** occurs when an assignment is made inside the predicate of a conditional, such as `if` or `while`.

In C and C++, a single equal sign is an assignment not a comparison. Using a single equal sign in a conditional statement can indicate a typo or a mistake.

## Risk

- Conditional statement tests the wrong values— The single equal sign operation assigns the value of the right operand to the left operand. Then, because this assignment is inside the predicate of a conditional, the program checks whether the new value of the left operand is nonzero or not NULL.
- Maintenance and readability issues — Even if the assignment is intended, someone reading or updating the code can misinterpret the assignment as an equality comparison instead of an assignment.

## Fix

- If the assignment is a bug, to check for equality, add a second equal sign (`==`).
- If the assignment inside the conditional statement was intentional, to improve readability, separate the assignment and the test. Move the assignment outside the control statement. In the control statement, simply test the result of the assignment.

## Examples

### Single Equal Sign Inside an `if` Condition

```
#include <stdio.h>
```

```
void bad_equals_ex(int alpha, int beta)
{
    if(alpha = beta)
    {
        printf("Equal\n");
    }
}
```

The equal sign is flagged as a defect because the assignment operator is used within the predicate of the if-statement. The predicate assigns the value `beta` to `alpha`, then implicitly tests whether `alpha` is true or false.

One possible correction is adding an additional equal sign. This correction changes the assignment to a comparison. The if condition compares whether `alpha` and `beta` are equal.

```
#include <stdio.h>

void equality_test(int alpha, int beta)
{
    if(alpha == beta)
    {
        printf("Equal\n");
    }
}
```

If an assignment must be made inside the predicate, a possible correction is adding an explicit comparison. This correction assigns the value of `beta` to `alpha`, then explicitly checks whether `alpha` is nonzero. The code is clearer.

```
#include <stdio.h>

int assignment_not_zero(int alpha, int beta)
{
    if((alpha = beta) != 0)
    {
        return alpha;
    }
    else
    {
        return 0;
    }
}
```

If the assignment can be made outside the control statement, one possible correction is to separate the assignment and comparison. This correction assigns the value of `beta` to `alpha` before the `if`. Inside the `if`-condition, only `alpha` is given to test if `alpha` is nonzero or not `NULL`.

```
#include <stdio.h>

void assign_and_print(int alpha, int beta)
{
    alpha = beta;
    if(alpha)
    {
        printf("%d", alpha);
    }
}
```

## Check Information

**Group:** Programming

**Language:** C | C++

**Default:** On for handwritten code, off for generated code

**Command-Line Syntax:** `BAD_EQUAL_USE`

**Impact:** Medium

**CWE ID:** 480, 481

**CERT C ID:** EXP45-C

**CERT C++ ID:** EXP45-C

**ISO/IEC TS 17961 ID:** `boolasgn`

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Invalid use of `==` operator

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Floating point comparison with equality operators

Imprecise comparison of floating-point variables

## Description

**Floating point comparison with equality operators** occurs when you use an equality (==) or inequality (!=) operation with floating-point numbers. It is possible that the equality or inequality of two floating-point values is not exact because floating-point representation can be imprecise.

Polyspace does not raise a defect for an equality or inequality operation with floating-point numbers when:

- The comparison is between two float constants.

```
float flt = 1.0;
if (flt == 1.1)
```

- The comparison is between a constant and a variable that can take a finite, reasonably small number of values.

```
float x;

int rand = random();
switch(rand) {
case 1: x = 0.0; break;
case 2: x = 1.3; break;
case 3: x = 1.7; break;
case 4: x = 2.0; break;
default: x = 3.5; break; }

...
if (x==1.3)
```

- The comparison is between floating-point expressions that contain only integer values.

```
float x = 0.0;
for (x=0.0;x!=100.0;x+=1.0) {
...
if (random) break;
```

```
}  
  
if (3*x+4==2*x-1)  
...  
if (3*x+4 == 1.3)
```

- One of the operands is `0.0`, unless you use the option flag `-detect-bad-float-op-on-zero`.

```
/* Defect detected when  
you use the option flag */  
  
if (x==0.0f)
```

If you are running an analysis through the user interface, you can enter this option in the **Other** field, under the **Advanced Settings** node on the **Configuration** pane. See **Other**.

At the command line, add the flag to your analysis command.

```
polyspace-bug-finder-nodesktop -sources filename ^  
-checkers BAD_FLOAT_OP -detect-bad-float-op-on-zero
```

## Examples

### Floats Inequality in for-loop

```
#include <stdio.h>  
#include <math.h>  
#include <float.h>  
  
void func(void)  
{  
    float f;  
    for (f = 1.0; f != 2.0; f = f + 0.1)  
        (void)printf("Value: %f\n", f);  
}
```

In this function, the `for`-loop tests the inequality of `f` and the number `2.0` as a stopping mechanism. The number of iterations is difficult to determine, or might be infinite, because of the imprecision in floating-point representation.

One possible correction is to use a different operator that is not as strict. For example, an inequality like `>=` or `<=`.

```
#include <stdio.h>
#include <math.h>
#include <float.h>

void func(void)
{
    float f;
    for (f = 1.0; f <= 2.0; f = f + 0.1)
        (void)printf("Value: %f\n", f);
}
```

## Check Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BAD\_FLOAT\_OP

**Impact:** Medium

**CWE ID:** 873

**CERT C ID:** FLP02-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Invalid use of standard library floating point routine

Wrong arguments to standard library function

## Description

**Invalid use of standard library floating point routine** occurs when you use invalid arguments with a floating point function from the standard library. This defect picks up:

- Rounding and absolute value routines

`ceil, fabs, floor, fmod`

- Fractions and division routines

`fmod, modf`

- Exponents and log routines

`frexp, ldexp, sqrt, pow, exp, log, log10`

- Trigonometry function routines

`cos, sin, tan, acos, asin, atan, atan2, cosh, sinh, tanh, acosh, asinh, atanh`

## Examples

### Arc Cosine Operation

```
#include <math.h>

double arccosine(void) {
    double degree = 5.0;
    return acos(degree);
}
```

The input value to `acos` must be in the interval `[-1, 1]`. This input argument, `degree`, is outside this range.

One possible correction is to change the input value to fit the specified range. In this example, change the input value from degrees to radians to fix this defect.

```
#include <math.h>

double arccosine(void) {
    double degree = 5.0;
    double radian = degree * 3.14159 / 180.;
    return acos(radian);
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `FLOAT_STD_LIB`

**Impact:** High

**CWE ID:** 227, 369, 682, 873

**CERT C ID:** FLP03-C, FLP32-C

**CERT C++ ID:** FLP32-C

## See Also

### Polyspace Analysis Options

Find defects (`-checkers`)

### Polyspace Results

Invalid use of standard library integer routine|Invalid use of standard library memory routine|Invalid use of standard library string routine|Invalid use of standard library routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Invalid use of standard library integer routine

Wrong arguments to standard library function

## Description

**Invalid use of standard library integer routine** occurs when you use invalid arguments with an integer function from the standard library. This defect picks up:

- Character Conversion  
toupper, tolower
- Character Checks  
isalnum, isalpha, iscntrl, isdigit, isgraph, islower, isprint, ispunct, isspace, isupper, isxdigit
- Integer Division  
div, ldiv
- Absolute Values  
abs, labs

## Examples

### Absolute Value of Large Negative

```
#include <limits.h>
#include <stdlib.h>

int absoluteValue(void) {
    int neg = INT_MIN;
    return abs(neg);
}
```

The input value to `abs` is `INT_MIN`. The absolute value of `INT_MIN` is `INT_MAX+1`. This number cannot be represented by the type `int`.

One possible correction is to change the input value to fit returned data type. In this example, change the input value to `INT_MIN+1`.

```
#include <limits.h>
#include <stdlib.h>

int absoluteValue(void) {
    int neg = INT_MIN+1;
    return abs(neg);
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `INT_STD_LIB`

**Impact:** High

**CWE ID:** 227, 369, 682, 872

**CERT C ID:** STR37-C

**CERT C++ ID:** STR37-C

**ISO/IEC TS 17961 ID:** `chrsgnext`

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Invalid use of standard library floating point routine|Invalid use of standard library memory routine|Invalid use of standard library string routine|Invalid use of standard library routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Invalid use of standard library memory routine

Standard library memory function called with invalid arguments

### Description

**Invalid use of standard library memory routine** occurs when a memory library function is called with invalid arguments.

### Examples

#### Invalid Use of Standard Library Memory Routine Error

```
#include <string.h>
#include <stdio.h>

char* Copy_First_Six_Letters(void)
{
    char str1[10],str2[5];

    printf("Enter string:\n");
    scanf("%s",str1);

    memcpy(str2,str1,6);
    /* Defect: Arguments of memcpy invalid: str2 has size < 6 */

    return str2;
}
```

The size of string `str2` is 5, but six characters of string `str1` are copied into `str2` using the `memcpy` function.

One possible correction is to adjust the size of `str2` so that it accommodates the characters copied with the `memcpy` function.

```
#include <string.h>
#include <stdio.h>

char* Copy_First_Six_Letters(void)
{
    /* Fix: Declare str2 with size 6 */
    char str1[10],str2[6];

    printf("Enter string:\n");
    scanf("%s",str1);

    memcpy(str2,str1,6);
    return str2;
}
```

## Check Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** MEM\_STD\_LIB

**Impact:** High

**CWE ID:** 120, 227, 690

**CERT C ID:** API00-C, ARR38-C, ARR39-C, EXP08-C, EXP34-C, MSC15-C

**CERT C++ ID:** ARR38-C, ARR39-C, EXP34-C

**ISO/IEC TS 17961 ID:** nullref, libptr

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Invalid use of standard library string routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Invalid use of standard library routine

Wrong arguments to standard library function

## Description

**Invalid use of standard library routine** occurs when you use invalid arguments with a function from the standard library. This defect picks up errors related to other functions not covered by float, integer, memory, or string standard library routines.

## Examples

### Calling printf Without a String

```
#include <stdio.h>
#include <stdlib.h>

void print_null(void) {
    printf(NULL);
}
```

The function `printf` takes only string input arguments or format specifiers. In this function, the input value is `NULL`, which is not a valid string.

One possible correction is to change the input arguments to fit the requirements of the standard library routine. In this example, the input argument was changed to a character.

```
#include <stdio.h>

void print_null(void) {
    char zero_val = '0';
    printf((const char*)zero_val);
}
```

## Check Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** OTHER\_STD\_LIB

**Impact:** High

**CWE ID:** 227, 690

**CERT C ID:** API00-C, ARR38-C, MSC15-C

**CERT C++ ID:** ARR38-C

**ISO/IEC TS 17961 ID:** strmod

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Invalid use of standard library integer routine|Invalid use of standard library floating point routine|Invalid use of standard library memory routine|Invalid use of standard library string routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Invalid use of standard library string routine

Standard library string function called with invalid arguments

## Description

**Invalid use of standard library string routine** occurs when a string library function is called with invalid arguments.

## Examples

### Invalid Use of Standard Library String Routine Error

```
#include <string.h>
#include <stdio.h>

char* Copy_String(void)
{
    char *res;
    char gbuffer[5],text[20]="ABCDEFGHijkl";

    res=strcpy(gbuffer,text);
    /* Error: Size of text is less than gbuffer */

    return(res);
}
```

The string `text` is larger in size than `gbuffer`. Therefore, the function `strcpy` cannot copy `text` into `gbuffer`.

One possible correction is to declare the destination string `gbuffer` with equal or larger size than the source string `text`.

```
#include <string.h>
#include <stdio.h>

char* Copy_String(void)
```

```
{  
  char *res;  
  /*Fix: gbuffer has equal or larger size than text */  
  char gbuffer[20],text[20]="ABCDEFGHijkl";  
  
  res=strcpy(gbuffer,text);  
  
  return(res);  
}
```

## Check Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** STR\_STD\_LIB

**Impact:** High

**CWE ID:** 120, 227, 690

**CERT C ID:** API00-C, ARR38-C, FIO37-C, MEM30-C, MSC15-C, STR31-C, STR32-C

**CERT C++ ID:** ARR38-C, FIO37-C, MEM30-C, MEM50-CPP, STR31-C, STR32-C, STR50-CPP

**ISO/IEC TS 17961 ID:** accfree, nullref, libptr, nonnullcs, taintformatio

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Invalid use of standard library memory routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Invalid va\_list argument

Variable argument list used after invalidation with `va_end` or not initialized with `va_start` or `va_copy`

### Description

**Invalid va\_list argument** occurs when you use a `va_list` variable as an argument to a function in the `vprintf` group but:

- You do not initialize the variable previously using `va_start` or `va_copy`.
- You invalidate the variable previously using `va_end` and do not reinitialize it.

For instance, you call the function `vsprintf` as `vsprintf (buffer, format, args)`. However, before the function call, you do not initialize the `va_list` variable `args` using either of the following:

- `va_start(args, paramName)`. `paramName` is the last named argument of a variable-argument function. For instance, for the function definition `void func(int n, char c, ...) {}`, `c` is the last named argument.
- `va_copy(args, anotherList)`. `anotherList` is another valid `va_list` variable.

### Risk

The behavior of an uninitialized `va_list` argument is undefined. Calling a function with an uninitialized `va_list` argument can cause stack overflows.

### Fix

Before using a `va_list` variable as function argument, initialize it with `va_start` or `va_copy`.

Clean up the variable using `va_end` only after all uses of the variable.

## Examples

### **va\_list Variable Used Following Call to va\_end**

```
#include <stdarg.h>
#include <stdio.h>

int call_vfprintf(int line, const char *format, ...) {
    va_list ap;
    int r=0;

    va_start(ap, format);
    r = vfprintf(stderr, format, ap);
    va_end(ap);

    r += vfprintf(stderr, format, ap);
    return r;
}
```

In this example, the `va_list` variable `ap` is used in the `vfprintf` function, after the `va_end` macro is called.

One possible correction is to call `va_end` only after all uses of the `va_list` variable.

```
#include <stdarg.h>
#include <stdio.h>

int call_vfprintf(int line, const char *format, ...) {
    va_list ap;
    int r=0;

    va_start(ap, format);
    r = vfprintf(stderr, format, ap);
    r += vfprintf(stderr, format, ap);
    va_end(ap);

    return r;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** INVALID\_VA\_LIST\_ARG

**Impact:** High

**CWE ID:** 628

**CERT C ID:** MSC39-C

**CERT C++ ID:** MSC39-C

## See Also

Find defects (-checkers) | Incorrect data type passed to va\_arg

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Large pass-by-value argument

Large argument passed by value between functions

### Description

**Large pass-by-value argument** occurs when a large input argument or return value is passed between functions by its value. For variables larger than 64 bytes, pass the value by pointer or by reference to save stack space and copy time.

In C code, when a function returns by value, the return value is copied to the caller. Therefore, this defect appears on functions that have large return values. In C++ code, if a function return value is of class type, under certain conditions, the standard allows compilers to avoid copying the return value (C++98: Section 12.8, Item 15; C++11: Section 12.8, Item 31). Most compilers do not perform a copy in such cases. This behavior is called return value optimization. In such cases, Polyspace Bug Finder does not produce this defect if a large object is returned by value.

### Examples

#### Large Function Argument

```
typedef struct s_userid {
    char name[2];
    int idnumber[100];
} userid;

char username(userid first) {
    return first.name[0];
}
```

The large structure, `userid`, is passed to the function `username`. Because `userid` is larger than 64 bytes, this function produces a large pass-by-value defect.

One possible correction is to pass the argument by reference instead of by value. In this corrected example, the pointer to a `userid` structure is passed instead of the actual structure.

```
typedef struct s_userid {
    char name[2];
    int idnumber[100];
} userid;

char username(userid *first) {
    return (*first).name[0];
}
```

## Large Function Return Value

```
#include <stdlib.h>

#define initialSize 4
#define idSize 100

typedef struct {
    char initials[initialSize];
    int id[idSize];
} userId;

userId* getAddress(void);
assignValues(char*, int*);

userId username(void) {
    userId * newId = getAddress();
    assignValues((*newId).initials, (*newId).id);
    return *newId;
}
```

In this example, the function `username` returns a large structure `*newId` by value. When a function calls `username`, the value in `*newId` is copied to the caller.

One possible correction is to return the large structure by reference. In this corrected example, the pointer to structure `newId` is returned from the function `username`.

```
#include <stdlib.h>
```

```
#define initialSize 4
#define idSize 100

typedef struct {
    char initials[initialSize];
    int id[idSize];
} userId;

userId* getAddress(void);
assignValues(char*, int*);

userId * username(void) {
    userId * newId = getAddress();
    assignValues((*newId).initials, (*newId).id);
    return newId;
}
```

## Check Information

**Group:** Good practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** PASS\_BY\_VALUE

**Impact:** Low

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Library loaded from externally controlled path

Using a library argument from an externally controlled path

## Description

**Library loaded from externally controlled path** looks for libraries loaded from fixed or controlled paths. If unintended actors can control one or more locations on this fixed path, Bug Finder raises a defect.

## Risk

If an attacker knows or controls the path that you use to load a library, the attacker can change:

- The library that the program loads, replacing the intended library and commands.
- The environment in which the library executes, giving unintended permissions and capabilities to the attacker.

## Fix

When possible, use hard-coded or fully qualified path names to load libraries. It is possible the hard-coded paths do not work on other systems. Use a centralized location for hard-coded paths, so that you can easily modify the path within the source code.

Another solution is to use functions that require explicit paths. For example, `system()` does not require a full path because it can use the `PATH` environment variable. However, `exec1()` and `execv()` do require the full path.

## Examples

### Call Custom Library

```
#include <stdlib.h>
#include <stdio.h>
#include <string.h>
#include <unistd.h>
#include <dlfcn.h>
#include <limits.h>

enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

void* taintedpathlib() {
    void* libhandle = NULL;
    char lib[SIZE128] = "";
    char* userpath = getenv("LD_LIBRARY_PATH");
    strncpy(lib, userpath, SIZE128);
    strcat(lib, "/libX.so");
    libhandle = dlopen(lib, 0x00001);
    return libhandle;
}
```

This example loads the library `libX.so` from an environment variable `LD_LIBRARY_PATH`. An attacker can change the library path in this environment variable. The actual library you load could be a different library from the one that you intend.

One possible correction is to change how you get the library path and check the path of the library before opening the library. This example receives the path as an input argument. Then the path is checked to make sure the library is not under `/usr/`.

```
#include <stdlib.h>
#include <stdio.h>
#include <string.h>
#include <unistd.h>
#include <dlfcn.h>
#include <limits.h>
```

```
enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

/* Function to sanitize a string */
int sanitize_str(char* s, size_t n) {
    /* strlen is used here as a kind of firewall for tainted string errors */
    int res = (strlen(s) > 0 && strlen(s) < n);
    return res;
}

void* taintedpathlib(char* userpath) {
    void* libhandle = NULL;
    if (sanitize_str(userpath, SIZE128)) {
        char lib[SIZE128] = "";

        if (strncmp(userpath, "/usr", 4) != 0) {
            strncpy(lib, userpath, SIZE128);
            strcat(lib, "/libX.so");
            libhandle = dlopen(lib, RTLD_LAZY);
        }
    }
    return libhandle;
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_PATH\_LIB

**Impact:** Medium

**CWE ID:** 114, 426

**CERT C ID:** API00-C, STR02-C, WIN00-C

## See Also

Execution of externally controlled command | Use of externally controlled environment variable | Command executed from externally controlled path

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Line with more than one statement

Multiple statements on a line

## Description

Before preprocessing starts, **Line with more than one statement** checks for additional text after the semicolon (;) on a line. A defect is not raised for comments, for-loop definitions, braces, or backslashes.

## Examples

### Single-Line Initialization

```
int multi_init(void){  
_   int abc = 4; int efg = 0; //defect  
  
    return abc*efg;  
}
```

In this example, `abc` and `efg` are initialized on the second line of the function as separate statements.

One possible correction is to use a comma instead of a semicolon to declare multiple variables on the same line.

```
int multi_init(void){  
    int a = 4, b = 0;  
  
    return a*b;  
}
```

One possible correction is to separate each initialization. By putting the initialization of `b` on the next line, the code no longer raises a defect.

```
int multi_init(void){  
    int a = 4;  

```

```
    int b = 0;

    return a*b;
}
```

## Single-Line Loops

```
int multi_loop(void){
    int a, b = 0;
    int index = 1;
    int tab[9] = {1,1,2,3,5,8,13,21};

    for(a=0; a < 3; a++) {b+=a;} // no defect
    _ for(b=0; b < 3; b++) {a+=b; index=b;} //defect
    _ while (index < 7) {index++; tab[index] = index * index;} //defect
    return a*b;
}
```

In this example, there are three loops coded on single lines, each with multiple semicolons.

- The first `for` loop has multiple semicolons. Polyspace does not raise a defect for multiple statements within a `for` loop declaration.
- Polyspace does raise a defect on the second `for` loop because there are multiple statements after the `for` loop declaration.
- The `while` loop also has multiple statements after the loop declaration. Polyspace raises a defect on this line.

One possible correction is to use a new line for each statement after the loop declaration.

```
int multi_loop(void){
    int a, b = 0;
    int index = 1;
    int tab[9] = {1,1,2,3,5,8,13,21};

    for(a=0; a < 3; a++) {b+=a;}

    for(b=0; b < 3; b++){
        a+=b;
        index=b;
    }
}
```

```
    }  
  
    while (index < 7){  
        index++;  
        tab[index] = index * index;  
    }  
    return a*b;  
}
```

## Single-line Conditionals

```
int multi_if(void){  
  
    int a, b = 1;  
    if(a == 0) { a++;} // no defect  
    else if(b == 1) {b++; a *= b;} //defect  
}
```

In this example, there are two conditional statements an: `if` and an `else if`. The `if` line does not raise a defect because only one statement follows the condition. The `else if` statement does raise a defect because two statements follow the condition.

One possible correction is to use a new line for conditions with multiple statements.

```
int multi_if(void){  
    int a, b = 1;  
  
    if(a == 0) a++;  
    else if(b == 1){  
        b++;  
        a *= b;  
    }  
}
```

## Check Information

**Group:** Good practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MORE\_THAN\_ONE\_STATEMENT

**Impact:** Low

## **See Also**

Find defects (-checkers)

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Load of library from a relative path can be controlled by an external actor

Library loaded with relative path is vulnerable to malicious attacks

## Description

**Load of library from a relative path can be controlled by an external actor** detects library loading routines that load an external library. If you load the library using a relative path or no path, Bug Finder flags the loading routine as a defect.

## Risk

By using a relative path or no path to load an external library, your program uses an unsafe search process to find the library. An attacker can control the search process and replace the intended library with a library of their own.

## Fix

When you load an external library, specify the full path.

## Examples

### Open Library with Library Name

```
#include <dlfcn.h>
#include <stdlib.h>
#include <string.h>
#include <malloc.h>
#include <stdio.h>

void relative_path()
{
    dlopen("liberty.dll", RTLD_LAZY);
}
```

In this example, `dlopen` opens the `liberty` library by calling only the name of the library. However, this call to the library uses a relative path to find the library, which is unsafe.

One possible correction is to use the full path to the library when you load it into your program.

```
#include <dlfcn.h>
#include <stdlib.h>
#include <string.h>
#include <malloc.h>
#include <stdio.h>

void relative_path()
{
    dlopen("/home/my_libs/library/liberty.dll",RTLD_LAZY);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** `RELATIVE_PATH_LIB`

**Impact:** Medium

**CWE ID:** 114, 427

**CERT C ID:** WIN00-C

## See Also

Execution of a binary from a relative path can be controlled by an external actor|Vulnerable path manipulation|Library loaded from externally controlled path

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Loop bounded with tainted value

Loop controlled by a value from an unsecure source

### Description

**Loop bounded with tainted value** detects loops that are bounded by values from an unsecure source.

### Risk

A tainted value can cause over looping or infinite loops. Attackers can use this vulnerability to crash your program or cause other unintended behavior.

### Fix

Before starting the loop, validate unknown boundary and iterator values.

## Examples

### Loop Boundary From Input Argument

```
enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

int taintedloopboundary(int count) {
    int res = 0;
    for (int i=0 ; i < count; ++i) {
        res += i;
    }
    return res;
}
```

In this example, the function uses the input argument to loop `count` times. `count` could be any number because the value is not checked before starting the for-loop.

One possible correction is to check the value of the variable controlling the loop before starting the for-loop. This example checks if `count` is greater than zero and less than the maximum size.

```
enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

int taintedloopboundary(int count) {
    int res = 0;

    if (count>0 && count<SIZE128) {
        for (int i=0 ; i<count ; ++i) {
            res += i;
        }
    }
    return res;
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_LOOP\_BOUNDARY

**Impact:** Medium

**CWE ID:** 606

**CERT C ID:** API00-C, INT04-C, MSC21-C

**ISO/IEC TS 17961 ID:** taintsink

## See Also

Array access with tainted index | Pointer dereference with tainted offset

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Member not initialized in constructor

Constructor does not initialize some members of a class

## Description

**Non-initialized member** occurs when a class constructor has at least one execution path on which it does not initialize some data members of the class.

The defect does not appear in the following cases:

- Empty constructors.
- The non-initialized member is not used in the code.

## Risk

The members that the constructor does not initialize can have unintended values when you read them later.

Initializing all members in the constructor makes it easier to use your class. If you call a separate method to initialize your members and then read them, you can avoid uninitialized values. However, someone else using your class can read a class member *before* calling your initialization method. Because a constructor is called when you create an object of the class, if you initialize all members in the constructor, they cannot have uninitialized values later on.

## Fix

The best practice is to initialize all members in your constructor, preferably in an initialization list.

## Examples

### Non-Initialized Member

```
class MyClass {
public:
    explicit MyClass(int);
private:
    int _i;
    char _c;
};

MyClass::MyClass(int flag) {
    if(flag == 0) {
        _i = 0;
        _c = 'a';
    }
    else {
        _i = 1;
    }
}
```

In this example, if `flag` is not 0, the member `_c` is not initialized.

The defect appears on the closing brace of the constructor. Following are some tips for navigating in the source code:

- On the **Result Details** pane, see which members are not initialized.
- To navigate to the class definition, right-click a member that is initialized in the constructor. Select **Go To Definition**. In the class definition, you can see all the members, including those members that are not initialized in the constructor.

One possible correction is to initialize all members of the class `MyClass` for all values of `flag`.

```
class MyClass {
public:
    explicit MyClass(int);
private:
    int _i;
    char _c;
}
```

```
};  
  
MyClass::MyClass(int flag) {  
    if(flag == 0) {  
        _i = 0;  
        _c = 'a';  
    }  
    else {  
        _i = 1;  
        _c = 'b';  
    }  
}
```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** Off

**Command-Line Syntax:** NON\_INIT\_MEMBER

**Impact:** Medium

**CWE ID:** 456, 457, 908

**ISO/IEC TS 17961 ID:** uninitref

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Copy constructor not called in initialization list

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2015b

## Memory allocation with tainted size

Size argument to memory function is from an unsecure source

### Description

**Memory allocation with tainted size** checks memory allocation functions, such as `calloc` or `malloc`, for size arguments from unsecured sources.

### Risk

Uncontrolled memory allocation can cause your program to request too much system memory. This consequence can lead to a crash due to an out-of-memory condition, or assigning too many resources.

### Fix

Before allocating memory, check the value of your arguments to check that they do not exceed the bounds.

## Examples

### Allocate Memory Using Input Argument

```
#include "stdlib.h"

int* bug_taintedmemoryallocsize(size_t size) {
    int* p = (int*)malloc(size);
    return p;
}
```

In this example, `malloc` allocates `size` amount of memory for the pointer `p`. `size` is an outside variable, so could be any size value. If the size is larger than the amount of memory you have available, your program could crash.

One possible correction is to check the size of the memory that you want to allocate before performing the `malloc` operation. This example checks to see if the size is positive and less than the maximum size.

```
#include "stdlib.h"

enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

int* corrected_taintedmemoryallocsize(int size) {
    int* p = NULL;
    if (size>0 && size<SIZE128) {          /* Fix: Check entry range before use */
        p = (int*)malloc((unsigned int)size);
    }
    return p;
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAIANTED\_MEMORY\_ALLOC\_SIZE

**Impact:** Medium

**CWE ID:** 128, 131, 789

**CERT C ID:** API00-C, ARR32-C, INT04-C, MEM07-C, MEM10-C, MEM11-C, MEM35-C

**CERT C++ ID:** MEM35-C

**ISO/IEC TS 17961 ID:** taintsink

## See Also

Unprotected dynamic memory allocation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Memory comparison of float-point values

Object representation of floating-point values can be different (same) for equal (not equal) floating-point values

## Description

**Memory comparison of float-point values** occurs when you compare the object representation of floating-point values or the object representation of structures containing floating-point members. When you use the functions `memcmp`, `bcmp`, or `wmemcmp` to perform the bit pattern comparison, the defect is raised.

## Risk

The object representation of floating-point values uses specific bit patterns to encode those values. Floating-point values that are equal, for instance `-0.0` and `0.0` in the IEC 60559 standard, can have different bit patterns in their object representation. Similarly, floating-point values that are not equal can have the same bit pattern in their object representation.

## Fix

When you compare structures containing floating-point members, compare the structure members individually.

To compare two floating-point values, use the `==` or `!=` operators. If you follow a standard that discourages the use of these operators, such as MISRA, ensure that the difference between the floating-point values is within an acceptable range.

## Examples

### Using `memcmp` to Compare Structures with Floating-Point Members

```
#include <string.h>
```

```
typedef struct {
    int i;
    float f;
} myStruct;

extern void initialize_Struct(myStruct *);

int func_cmp(myStruct *s1, myStruct *s2) {
    /* Comparison between structures containing
    * floating-point members */
    return memcmp
        ((const void *)s1, (const void *)s2, sizeof(myStruct));
}

void func(void) {
    myStruct s1, s2;
    initialize_Struct(&s1);
    initialize_Struct(&s2);
    (void)func_cmp(&s1, &s2);
}
```

In this example, `func_cmp()` calls `memcmp()` to compare the object representations of structures `s1` and `s2`. The comparison might be inaccurate because the structures contain floating-point members.

One possible correction is to compare the structure members individually and to ensure that the difference between the floating-point values is within an acceptable range defined by ESP.

```
#include <string.h>

typedef struct {
    int i;
    float f;
} myStruct;

extern void initialize_Struct(myStruct *);

#define ESP 0.00001

int func_cmp(myStruct *s1, myStruct *s2) {
    /*Structure members are compared individually */
```

```
        return ((s1->i == s2->i) &&
                (fabsf(s1->f - s2->f) <= ESP));
    }

void func(void) {
    myStruct s1, s2;
    initialize_Struct(&s1);
    initialize_Struct(&s2);
    (void)func_cmp(&s1, &s2);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MEMCMP\_FLOAT

**Impact:** Low

**CERT C ID:** FLP37-C

**CERT C++ ID:** FLP37-C

## See Also

### Topics

Floating point comparison with equality operators

Memory comparison of padding data

Memory comparison of strings

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Memory comparison of padding data

`memcmp` compares data stored in structure padding

### Description

**Memory comparison of padding data** occurs when you use the `memcmp` function to compare two structures as a whole. In the process, you compare meaningless data stored in the structure padding.

For instance:

```
struct structType {
    char member1;
    int member2;
    .
    .
};

structType var1;
structType var2;
.
.
if(memcmp(&var1,&var2,sizeof(var1)))
{...}
```

### Risk

If members of a structure have different data types, your compiler introduces additional padding for data alignment in memory. For an example of padding, see [Higher Estimate of Local Variable Size](#).

The content of these extra padding bytes is meaningless. The C Standard allows the content of these bytes to be indeterminate, giving different compilers latitude to implement their own padding. If you perform a byte-by-byte comparison of structures with `memcmp`, you compare even the meaningless data stored in the padding. You might reach the false conclusion that two data structures are not equal, even if their corresponding members have the same value.

## Fix

Instead of comparing two structures in one attempt, compare the structures member by member.

For efficient code, write a function that does the comparison member by member. Use this function for comparing two structures.

You can use `memcmp` for byte-by-byte comparison of structures only if you know that the structures do not contain padding. Typically, to prevent padding, you use specific attributes or pragmas such as `#pragma pack`. However, these attributes or pragmas are not supported by all compilers and make your code implementation-dependent. If your structures contain bit-fields, using these attributes or pragmas cannot prevent padding.

## Examples

### Structures Compared with `memcmp`

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

#define fatal_error() abort()

typedef struct s_padding
{
    char c;
    int i;
    unsigned int bf1:1;
    unsigned int bf2:2;
    unsigned char buffer[20];
} S_Padding ;

/* Function that guarantees safe access to the input memory */
extern int trusted_memory_zone(void *ptr, size_t sz);

int func(const S_Padding *left, const S_Padding *right)
{
    if (!trusted_memory_zone((void *)left, sizeof(S_Padding)) ||
        !trusted_memory_zone((void *)right, sizeof(S_Padding))) {
```

```
        fatal_error();
    }

    if (0 == memcmp(left, right, sizeof(S_Padding)))
    {
        return 1;
    }
    else
        return 0;
}
```

In this example, `memcmp` compares byte-by-byte the two structures that `left` and `right` point to. Even if the values stored in the structure members are the same, the comparison can show an inequality if the meaningless values in the padding bytes are not the same.

One possible correction is to compare individual structure members.

---

**Note** You can compare entire arrays by using `memcmp`. All members of an array have the same data type. Padding bytes are not required to store arrays.

---

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

#define fatal_error() abort()

typedef struct s_padding
{
    char c;
    int i;
    unsigned int bf1:1;
    unsigned int bf2:2;
    unsigned char buffer[20];
} S_Padding ;

/* Function that guarantees safe access to the input memory */
extern int trusted_memory_zone(void *ptr, size_t sz);

int func(const S_Padding *left, const S_Padding *right)
{
    if (!trusted_memory_zone((void *)left, sizeof(S_Padding)) ||
```

```
        !trusted_memory_zone((void *)right, sizeof(S_Padding))) {
        fatal_error();
    }

    return ((left->c == right->c) &&
            (left->i == right->i) &&
            (left->bf1 == right->bf1) &&
            (left->bf2 == right->bf2) &&
            (memcmp(left->buffer, right->buffer, 20) == 0));
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** MEMCMP\_PADDING\_DATA

**Impact:** Medium

**CWE ID:** 188

**CERT C ID:** EXP42-C

**CERT C++ ID:** EXP42-C

**ISO/IEC TS 17961 ID:** padcomp

## See Also

### Polyspace Results

Memory comparison of strings

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Memory comparison of strings

`memcmp` compares data stored in strings after the null terminator

### Description

**Memory comparison of strings** occurs when:

- You compare two strings byte-by-byte with the `memcmp` function.
- The number of bytes compared is such that you compare meaningless data stored after the null terminator.

For instance:

```
memcmp(string1, string2, sizeof(string1))
```

can compare bytes in the string after the null terminator.

### Risk

The null terminator signifies the end of a string. Comparison of bytes after the null terminator is meaningless. You might reach the false conclusion that two strings are not equal, even if the bytes before the null terminator store the same value.

### Fix

Use `strcmp` for string comparison. The function compares strings only up to the null terminator.

If you use `memcmp` for a byte-by-byte comparison of two strings, avoid comparison of bytes after the null terminator. Determine the number of bytes to compare by using the `strlen` function.

## Examples

### Strings Compared with memcmp

```
#include <stdio.h>
#include <string.h>

#define SIZE20 20

int func()
{
    char s1[SIZE20] = "abc";
    char s2[SIZE20] = "abc";

    return memcmp(s1, s2, sizeof(s1));
}
```

In this example, `sizeof` returns the length of the entire array `s1`, which is 20. However, only the first three bytes of the string are relevant.

Even though `s1` and `s2` hold the same value, the comparison with `memcmp` can show a false inequality.

One possible correction is to determine the number of bytes to compare using the `strlen` function. `strlen` returns the number of bytes *before* the null terminator (and excluding the null terminator itself).

```
#include <stdio.h>
#include <string.h>

#define SIZE20 20

int func()
{
    char s1[SIZE20] = "abc";
    char s2[SIZE20] = "abc";

    return memcmp(s1, s2, strlen(s1));
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** MEMCMP\_STRINGS

**Impact:** Medium

**CWE ID:** 188

## See Also

### Polyspace Results

Memory comparison of padding data

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

# Memory leak

Memory allocated dynamically not freed

## Description

**Memory leak** occurs when you do not free a block of memory allocated through `malloc`, `calloc`, `realloc`, or `new`. If the memory is allocated in a function, the defect does not occur if:

- Within the function, you free the memory using `free` or `delete`.
- The function returns the pointer assigned by `malloc`, `calloc`, `realloc`, or `new`.
- The function stores the pointer in a global variable or in a parameter.

## Examples

### Pointer with Dynamic Memory

```
#include<stdlib.h>
#include<stdio.h>

void assign_memory(void)
{
    int* pi = (int*)malloc(sizeof(int));
    if (pi == NULL)
    {
        printf("Memory allocation failed");
        return;
    }

    *pi = 42;
    /* Defect: pi is not freed */
}
```

In this example, `pi` is dynamically allocated by `malloc`. The function `assign_memory` does not free the memory, nor does it return `pi`.

One possible correction is to free the memory referenced by `pi` using the `free` function. The `free` function must be called before the function `assign_memory` terminates

```
#include<stdlib.h>
#include<stdio.h>

void assign_memory(void)
{
    int* pi = (int*)malloc(sizeof(int));
    if (pi == NULL)
    {
        printf("Memory allocation failed");
        return;
    }
    *pi = 42;

    /* Fix: Free the pointer pi*/
    free(pi);
}
```

Another possible correction is to return the pointer `pi`. Returning `pi` allows the function calling `assign_memory` to free the memory block using `pi`.

```
#include<stdlib.h>
#include<stdio.h>

int* assign_memory(void)
{
    int* pi = (int*)malloc(sizeof(int));
    if (pi == NULL)
    {
        printf("Memory allocation failed");
        return(pi);
    }
    *pi = 42;

    /* Fix: Return the pointer pi*/
    return(pi);
}
```

## Memory Leak with New/Delete

```
#define NULL '\0'

void initialize_arr1(void)
{
    int *p_scalar = new int(5);
}

void initialize_arr2(void)
{
    int *p_array = new int[5];
}
```

In this example, the functions create two variables, `p_scalar` and `p_array`, using the `new` keyword. However, the functions end without cleaning up the memory for these pointers. Because the functions used `new` to create these variables, you must clean up their memory by calling `delete` at the end of each function.

To correct this error, add a `delete` statement for every `new` initialization. If you used brackets `[]` to instantiate a variable, you must call `delete` with brackets as well.

```
#define NULL '\0'

void initialize_arrs(void)
{
    int *p_scalar = new int(5);
    int *p_array = new int[5];

    delete p_scalar;
    p_scalar = NULL;

    delete[] p_array;
    p_array = NULL;
}
```

## Check Information

**Group:** Dynamic memory

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MEM\_LEAK

**Impact:** Medium

**CWE ID:** 401, 404

**CERT C ID:** MEM11-C, MEM12-C, MEM31-C

**CERT C++ ID:** MEM31-C, MEM52-CPP

**ISO/IEC TS 17961 ID:** fcloselose

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Mismatched alloc/dealloc functions on Windows

Improper deallocation function causes memory corruption issues

## Description

**Mismatched alloc/dealloc functions on Windows** occurs when you use a Windows deallocation function that is not properly paired to its corresponding allocation function.

## Risk

Deallocating memory with a function that does not match the allocation function can cause memory corruption or undefined behavior. If you are using an older version of Windows, the improper function can also cause compatibility issues with newer versions.

## Fix

Properly pair your allocation and deallocation functions according to the functions listed in this table.

Allocation Function	Deallocation Function
malloc()	free()
realloc()	free()
calloc()	free()
_aligned_malloc()	_aligned_free()
_aligned_offset_malloc()	_aligned_free()
_aligned_realloc()	_aligned_free()
_aligned_offset_realloc()	_aligned_free()
_aligned_realloc()	_aligned_free()
_aligned_offset_realloc()	_aligned_free()

Allocation Function	Deallocation Function
<code>_alloca()</code>	<code>_freea()</code>
<code>LocalAlloc()</code>	<code>LocalFree()</code>
<code>LocalReAlloc()</code>	<code>LocalFree()</code>
<code>GlobalAlloc()</code>	<code>GlobalFree()</code>
<code>GlobalReAlloc()</code>	<code>GlobalFree()</code>
<code>VirtualAlloc()</code>	<code>VirtualFree()</code>
<code>VirtualAllocEx()</code>	<code>VirtualFreeEx()</code>
<code>VirtualAllocExNuma()</code>	<code>VirtualFreeEx()</code>
<code>HeapAlloc()</code>	<code>HeapFree()</code>
<code>HeapReAlloc()</code>	<code>HeapFree()</code>

## Examples

### Memory Deallocated with Incorrect Function

```

#ifdef _WIN32_
#include <windows.h>
#else
#define _WIN32_
typedef void *HANDLE;
typedef HANDLE HGLOBAL;
typedef HANDLE HLOCAL;
typedef unsigned int UINT;
extern HLOCAL LocalAlloc(UINT uFlags, UINT uBytes);
extern HLOCAL LocalFree(HLOCAL hMem);
extern HGLOBAL GlobalFree(HGLOBAL hMem);
#endif

#define SIZE9 9

void func(void)
{
    /* Memory allocation */
    HLOCAL p = LocalAlloc(0x0000, SIZE9);

```

```
    if (p) {
        /* Memory deallocation. */
        GlobalFree(p);
    }
}
```

In this example, memory is allocated with `LocalAlloc()`. The program then erroneously uses `GlobalFree()` to deallocate the memory.

When you allocate memory with `LocalAllocate()`, use `LocalFree()` to deallocate the memory.

```
#ifdef _WIN32_
#include <windows.h>
#else
#define _WIN32_
typedef void *HANDLE;
typedef HANDLE HGLOBAL;
typedef HANDLE HLOCAL;
typedef unsigned int UINT;
extern HLOCAL LocalAlloc(UINT uFlags, UINT uBytes);
extern HLOCAL LocalFree(HLOCAL hMem);
extern HGLOBAL GlobalFree(HGLOBAL hMem);
#endif

#define SIZE9 9
void func(void)
{
    /* Memory allocation */
    HLOCAL p = LocalAlloc(0x0000, SIZE9);
    if (p) {
        /* Memory deallocation. */
        LocalFree(p);
    }
}
```

## Result Information

**Group:** Dynamic memory

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** WIN\_MISMATCH\_DEALLOC

**Impact:** Low

**CWE ID:** 404, 762

**CERT C ID:** WIN30-C

**CERT C++ ID:** WIN30-C

## See Also

Invalid deletion of pointer | Invalid free of pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

# Mismatch between data length and size

Data size argument is not computed from actual data length

## Description

**Mismatch between data length and size** looks for memory copying functions such as `memcpy`, `memset`, or `memmove`. If you do not control the length argument and data buffer argument properly, Bug Finder raises a defect.

## Risk

If an attacker can manipulate the data buffer or length argument, the attacker can cause buffer overflow by making the actual data size smaller than the length.

This mismatch in length allows the attacker to copy memory past the data buffer to a new location. If the extra memory contains sensitive information, the attacker can now access that data.

This defect is similar to the SSL Heartbleed bug.

## Fix

When copying or manipulating memory, compute the length argument directly from the data so that the sizes match.

## Examples

### Copy Buffer of Data

```
#include <stdlib.h>
#include <string.h>

typedef struct buf_mem_st {
    char *data;
```

```
    size_t max;    /* size of buffer */
} BUF_MEM;

extern BUF_MEM beta;

int cpy_data(BUF_MEM *alpha)
{
    BUF_MEM *os = alpha;
    int num, length;

    if (alpha == 0x0) return 0;
    num = 0;

    length = *(unsigned short *)os->data;
    memcpy(&(beta.data[num]), os->data + 2, length);

    return(1);
}
```

This function copies the buffer alpha into a buffer beta. However, the length variable is not related to data+2.

One possible correction is to check the length of your buffer against the maximum value minus 2. This check ensures that you have enough space to copy the data to the beta structure.

```
#include <stdlib.h>
#include <string.h>

typedef struct buf_mem_st {
    char *data;
    size_t max;    /* size of buffer */
} BUF_MEM;

extern BUF_MEM beta;

int cpy_data(BUF_MEM *alpha)
{
    BUF_MEM *os = alpha;
    int num, length;

    if (alpha == 0x0) return 0;
    num = 0;
```

```
length = *(unsigned short *)os->data;
if (length<(os->max -2)) {
    memcpy(&(beta.data[num]), os->data + 2, length);
}

return(1);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** DATA\_LENGTH\_MISMATCH

**Impact:** Medium

**CWE ID:** 130, 240

**CERT C ID:** ARR38-C

**CERT C++ ID:** ARR38-C

## See Also

Copy of overlapping memory

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Missing blinding for RSA algorithm

Context used in decryption or signature verification is not blinded against timing attacks

### Description

**Missing blinding for RSA algorithm** occurs when you do not enable blinding for an RSA context object before using the object for decryption or signature verification.

For instance, you do not turn on blinding in the context object `rsa` before this decryption step:

```
ret = RSA_public_decrypt(in_len, in, out, rsa, RSA_PKCS1_PADDING)
```

### Risk

Without blinding, the time it takes for the cryptographic operation to be completed has a correlation with the key value. An attacker can gather information about the RSA key by measuring the time for completion. Blinding removes this correlation and protects the decryption or verification operation against timing attacks.

### Fix

Before performing RSA decryption or signature verification, enable blinding.

```
ret = RSA_blinding_on(rsa, NULL);
```

## Examples

### Blinding Disabled Before Decryption

```
#include <stddef.h>  
#include <openssl/rsa.h>  
#include <openssl/evp.h>
```

```
#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
int func(unsigned char *src, size_t len, RSA* rsa){
    if (rsa == NULL) fatal_error();

    RSA_blinding_off(rsa);
    return RSA_private_decrypt(len, src, out_buf, rsa, RSA_PKCS1_OAEP_PADDING);
}
```

In this example, blinding is disabled for the context object `rsa`. Decryption with this context object can be vulnerable to timing attacks.

One possible correction is to explicitly enable blinding before decryption. Even if blinding might be enabled previously or by default, explicitly enabling blinding ensures that the security of the current decryption step is not reliant on the caller of `func`.

```
#include <stddef.h>
#include <openssl/rsa.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
int func(unsigned char *src, size_t len, RSA* rsa){
    if (rsa == NULL) fatal_error();

    ret = RSA_blinding_on(rsa, NULL);
    if (ret <= 0) fatal_error();
    return RSA_private_decrypt(len, src, out_buf, rsa, RSA_PKCS1_OAEP_PADDING);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_RSA\_NO\_BLINDING

**Impact:** Medium

**CWE ID:** 310, 326, 573

### See Also

Incompatible padding for RSA algorithm operation | Missing padding for RSA algorithm | Nonsecure RSA public exponent | Weak padding for RSA algorithm

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

# Missing block cipher initialization vector

Context used for encryption or decryption is associated with NULL initialization vector or not associated with an initialization vector

## Description

**Missing block cipher initialization vector** occurs when you encrypt or decrypt data using a NULL initialization vector (IV).

---

**Note** You can initialize your cipher context with a NULL initialization vector (IV). However, if your algorithm requires an IV, before the encryption or decryption step, you must associate the cipher context with a non-NULL IV.

---

## Risk

Many block cipher modes use an initialization vector (IV) to prevent dictionary attacks. If you use a NULL IV, your encrypted data is vulnerable to such attacks.

Block ciphers break your data into blocks of fixed size. Block cipher modes such as CBC (Cipher Block Chaining) protect against dictionary attacks by XOR-ing each block with the encrypted output from the previous block. To protect the first block, these modes use a random initialization vector (IV). If you use a NULL IV, you get the same ciphertext when encrypting the same plaintext. Your data becomes vulnerable to dictionary attacks.

## Fix

Before your encryption or decryption steps

```
ret = EVP_EncryptUpdate(&ctx, out_buf, &out_len, src, len)
```

associate your cipher context `ctx` with a non-NULL initialization vector.

```
ret = EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv)
```

## Examples

### NULL Initialization Vector Used for Encryption

```
#include <openssl/evp.h>
#include <stdlib.h>
#define fatal_error() abort()

unsigned char *out_buf;
int out_len;

int func(EVP_CIPHER_CTX *ctx, unsigned char *key, unsigned char *src, int len){
    if (key == NULL)
        fatal_error();

    /* Last argument is initialization vector */
    EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, NULL);

    /* Update step with NULL initialization vector */
    return EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
}
```

In this example, the initialization vector associated with the cipher context `ctx` is `NULL`. If you use this context to encrypt your data, your data is vulnerable to dictionary attacks.

Use a strong random number generator to produce the initialization vector. The corrected code here uses the function `RAND_bytes` declared in `openssl/rand.h`.

```
#include <openssl/evp.h>
#include <openssl/rand.h>
#include <stdlib.h>
#define fatal_error() abort()
#define SIZE16 16

unsigned char *out_buf;
int out_len;

int func(EVP_CIPHER_CTX *ctx, unsigned char *key, unsigned char *src, int len){
```

```
    if (key == NULL)
        fatal_error();
    unsigned char iv[SIZE16];
    RAND_bytes(iv, 16);

    /* Last argument is initialization vector */
    EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);

    /* Update step with non-NULL initialization vector */
    return EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_NO\_IV

**Impact:** Medium

**CWE ID:** 310, 326, 329

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Missing break of switch case

No comments at the end of switch case without a break statement

### Description

**Missing break of switch case** looks for switch cases that do not end in a `break` statement. If the case does not have a code comment after it, Polyspace assumes the missing break is not intentional and raises a defect.

### Risk

Switch cases without break statements fall through to the next switch case. If this fall-through is not intended, the switch case can unintentionally execute code and end the switch with unexpected results.

### Fix

If you do not want a break for the highlighted switch case, add a comment to your code to document why this case falls through to the next case. This comment removes the defect from your results and makes your code more maintainable.

If you forgot the break, add it before the end of the switch case.

## Examples

### Switch Without Break Statements

```
enum WidgetEnum { WE_W, WE_X, WE_Y, WE_Z } widget_type;

extern void demo_do_something_for_WE_W(void);
extern void demo_do_something_for_WE_X(void);
extern void demo_report_error(void);

void bug_missingswitchbreak(enum WidgetEnum wt)
{
```

```

/*
   In this non-compliant code example, the case where widget_type is WE_W lacks a
   break statement. Consequently, statements that should be executed only when
   widget_type is WE_X are executed even when widget_type is WE_W.
*/
switch (wt)
{
  case WE_W:
    demo_do_something_for_WE_W();
  case WE_X:
    demo_do_something_for_WE_X();
  default:
    /* Handle error condition */
    demo_report_error();
}
}

```

In this example, there are two cases without `break` statements. When `wt` is `WE_W`, the statements for `WE_W`, `WE_X`, and the `default` case execute because the program falls through the two cases without a `break`. No defect is raised on the `default` case or last case because it does not need a `break` statement.

To fix this example, either add a comment to mark and document the acceptable fall-through or add a `break` statement to avoid fall-through. In this example, case `WE_W` is supposed to fall through, so a comment is added to explicitly state this action. For the second case, a `break` statement is added to avoid falling through to the `default` case.

```

enum WidgetEnum { WE_W, WE_X, WE_Y, WE_Z } widget_type;

extern void demo_do_something_for_WE_W(void);
extern void demo_do_something_for_WE_X(void);
extern void demo_report_error(void);

void corrected_missingswitchbreak(enum WidgetEnum wt)
{
  switch (wt)
  {
    case WE_W:
      demo_do_something_for_WE_W();
      /* fall through to WE_X*/
    case WE_X:
      demo_do_something_for_WE_X();
      break;
  }
}

```

```
        default:
            /* Handle error condition */
            demo_report_error();
        }
    }
```

## Result Information

**Group:** Good Practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MISSING\_SWITCH\_BREAK

**Impact:** Low

**CWE ID:** 484

**CERT C ID:** MSC17-C

## See Also

Missing case for switch condition

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

# Missing byte reordering when transferring data

Different endianness of host and network

## Description

**Missing byte reordering when transferring data** occurs when you do not use a byte ordering function:

- Before sending data to a network socket.
- After receiving data from a network socket.

## Risk

Some system architectures implement little endian byte ordering (least significant byte first), and other systems implement big endian (most significant byte first). If the endianness of the sent data does not match the endianness of the receiving system, the value returned when reading the data is incorrect.

## Fix

After receiving data from a socket, use a byte ordering function such as `ntohl()`. Before sending data to a socket, use a byte ordering function such as `htonl()`.

## Examples

### Data Transferred Without Byte Reordering

```
#include <stdio.h>
#include <stdlib.h>
#include <stdint.h>
#include <sys/types.h>
#include <sys/socket.h>
```

```
#include <arpa/inet.h>
#include <byteswap.h>
#include <unistd.h>
#include <string.h>

unsigned int func(int sock, int server)
{
    unsigned int num;    /* assume int is 32-bits */
    if (server)
    {
        /* Server side */
        num = 0x17;
        /* Endianness of server host may not match endianness of network. */
        if (send(sock, (void *)&num, sizeof(num), 0) < (int)sizeof(num))
        {
            /* Handle error */
        }
        return 0;
    }
    else {
        /* Endianness of client host may not match endianness of network. */
        if (recv(sock, (void *)&num, sizeof(num), 0) < (int) sizeof(num))
        {
            /* Handle error */
        }

        /* Comparison may be inaccurate */
        if (num > 255)
        {
            return 255;
        }
        else
        {
            return num;
        }
    }
}
```

In this example, variable `num` is assigned hexadecimal value `0x17` and is sent over a network to the client from the server. If the server host is little endian and the network is

big endian, num is transferred as 0x17000000. The client then reads an incorrect value for num and compares it to a local numeric value.

Before sending num from the server host, use `htonl()` to convert from host to network byte ordering. Similarly, before reading num on the client host, use `ntohl()` to convert from network to host byte ordering.

```
#include <stdio.h>
#include <stdlib.h>
#include <stdint.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <arpa/inet.h>
#include <byteswap.h>
#include <unistd.h>
#include <string.h>

unsigned int func(int sock, int server)
{
    unsigned int num;    /* assume int is 32-bits */
    if (server)
    {
        /* Server side */
        num = 0x17;

        /* Convert to network byte order. */
        num = htonl(num);
        if (send(sock, (void *)&num, sizeof(num), 0) < (int)sizeof(num))
        {
            /* Handle error */
        }
        return 0;
    }
    else {
        if (recv(sock, (void *)&num, sizeof(num), 0) < (int) sizeof(num))
        {
            /* Handle error */
        }

        /* Convert to host byte order. */
        num = ntohl(num);
        if (num > 255)
        {
```

```
        return 255;
    }
    else
    {
        return num;
    }
}
```

### Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MISSING\_BYTESWAP

**Impact:** Medium

**CWE ID:** 188, 198

**CERT C ID:** POS39-C

**CERT C++ ID:** POS39-C

### See Also

#### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

# Missing case for switch condition

switch variable not covered by cases and default case is missing

## Description

**Missing case for switch condition** occurs when the `switch` variable can take values that are not covered by a `case` statement.

---

**Note** Bug Finder only raises a defect if the switch variable is not full range.

---

## Risk

If the `switch` variable takes a value that is not covered by a `case` statement, your program can have unintended behavior.

A `switch`-statement that makes a security decision is particularly vulnerable when all possible values are not explicitly handled. An attacker can use this situation to deviate the normal execution flow.

## Fix

It is good practice to use a `default` statement as a catch-all for values that are not covered by a `case` statement. Even if the `switch` variable takes an unintended value, the resulting behavior can be anticipated.

## Examples

### Missing Default Condition

```
#include <stdio.h>
#include <string.h>

typedef enum E
```

```
{
    ADMIN=1,
    GUEST,
    UNKNOWN = 0
} LOGIN;

static LOGIN system_access(const char *username) {
    LOGIN user = UNKNOWN;

    if ( strcmp(username, "root") == 0 )
        user = ADMIN;

    if ( strcmp(username, "friend") == 0 )
        user = GUEST;

    return user;
}

int identify_bad_user(const char * username)
{
    int r=0;

    switch( system_access(username) )
    {
    case ADMIN:
        r = 1;
        break;
    case GUEST:
        r = 2;
    }

    printf("Welcome!\n");
    return r;
}
```

In this example, the enum parameter `User` can take a value `UNKNOWN` that is not covered by a case statement.

One possible correction is to add a default condition for possible values that are not covered by a case statement.

```
#include <stdio.h>
#include <string.h>
```

```
typedef enum E
{
    ADMIN=1,
    GUEST,
    UNKNOWN = 0
} LOGIN;

static LOGIN system_access(const char *username) {
    LOGIN user = UNKNOWN;

    if ( strcmp(username, "root") == 0 )
        user = ADMIN;

    if ( strcmp(username, "friend") == 0 )
        user = GUEST;

    return user;
}

int identify_bad_user(const char * username)
{
    int r=0;

    switch( system_access(username) )
    {
    case ADMIN:
        r = 1;
        break;
    case GUEST:
        r = 2;
        break;
    default:
        printf("Invalid login credentials!\n");
    }

    printf("Welcome!\n");
    return r;
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MISSING\_SWITCH\_CASE

**Impact:** Low

**CWE ID:** 478

**CERT C ID:** MSC01-C, MSC07-C

**ISO/IEC TS 17961 ID:** swtchdflt

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Missing cipher algorithm

An encryption or decryption algorithm is not associated with the cipher context

## Description

**Missing cipher algorithm** occurs when you do not assign a cipher algorithm when setting up your cipher context.

You can initialize your cipher context without an algorithm. However, before you encrypt or decrypt your data, you must associate the cipher context with a cipher algorithm.

## Risk

A missing cipher algorithm can lead to run-time errors or at least, non-secure ciphertext.

Before encryption or decryption, you set up a cipher context that has the information required for encryption: the cipher algorithm and mode, an encryption or decryption key and an initialization vector (for modes that require initialization vectors).

```
ret = EVP_EncryptInit(&ctx, EVP_aes_128_cbc(), key, iv)
```

The function `EVP_aes_128_cbc()` specifies that the Advanced Encryption Standard (AES) algorithm must be used for encryption. The function also specifies a block size of 128 bits and the Cipher Bloch Chaining (CBC) mode.

Instead of specifying the algorithm, you can use `NULL` in the initialization step. However, before using the cipher context for encryption or decryption, you must perform an additional initialization that associates an algorithm with the context. Otherwise, the update steps for encryption or decryption can lead to run-time errors.

## Fix

Before your encryption or decryption steps

```
ret = EVP_EncryptUpdate(&ctx, out_buf, &out_len, src, len)
```

associate your cipher context `ctx` with an algorithm.

```
ret = EVP_EncryptInit(ctx, EVP_aes_128_cbc(), key, iv)
```

## Examples

### Algorithm Missing During Context Initialization

```
#include <openssl/evp.h>
#include <stdlib.h>
#define SIZE16 16

unsigned char key[SIZE16];
unsigned char iv[SIZE16];
void func(void) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);
    EVP_EncryptInit_ex(ctx, NULL, NULL, key, iv);
}
```

In this example, an algorithm is not provided when the cipher context `ctx` is initialized.

Before you encrypt or decrypt your data, you have to provide a cipher algorithm. If you perform a second initialization to provide the algorithm, the cipher context is completely re-initialized. Therefore, the current initialization statement using `EVP_EncryptInit_ex` is redundant.

One possible correction is to provide an algorithm when you initialize the cipher context. In the corrected code below, the routine `EVP_aes_128_cbc` invokes the Advanced Encryption Standard (AES) algorithm. The routine also specifies a block size of 128 bits and the Cipher Block Chaining (CBC) mode for encryption.

```
#include <openssl/evp.h>
#include <stdlib.h>
#define SIZE16 16

unsigned char key[SIZE16];
unsigned char iv[SIZE16];
void func(unsigned char *src, int len, unsigned char *out_buf, int out_len) {
```

```
EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
EVP_CIPHER_CTX_init(ctx);

/* Initialization of cipher context */
EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);

/* Update steps for encryption */
EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_NO\_ALGORITHM

**Impact:** Medium

**CWE ID:** 310, 573

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Missing cipher data to process

Final encryption or decryption step is performed without previous update steps

### Description

**Missing cipher data to process** occurs when you perform the final step of a block cipher encryption or decryption incorrectly.

For instance, you do one of the following:

- You do not perform update steps for encrypting or decrypting the data before performing a final step.

```
/* Initialization of cipher context */
ret = EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);
...
/* Missing update step */
...
/* Final step */
ret = EVP_EncryptFinal_ex(ctx, out_buf, &out_len);
```

- You perform consecutive final steps without intermediate initialization and update steps.

```
/* Initialization of cipher context */
ret = EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);
...
/* Update step(s) */
ret = EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
...
/* Final step */
ret = EVP_EncryptFinal_ex(ctx, out_buf, &out_len);
...
/* Missing initialization and update */
...
/* Second final step */
ret = EVP_EncryptFinal_ex(ctx, out_buf, &out_len);
```

- You perform a cleanup of the cipher context and then perform a final step.

```
/* Initialization of cipher context */
ret = EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);
```

```
...
/* Update step(s) */
ret = EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
...
/* Cleanup of cipher context */
EVP_CIPHER_CTX_cleanup(ctx);
...
/* Second final step */
ret = EVP_EncryptFinal_ex(ctx, out_buf, &out_len);
```

## Risk

Block ciphers break your data into blocks of fixed size. During encryption or decryption, the update step encrypts or decrypts your data in blocks. Any leftover data is encrypted or decrypted by the final step. The final step adds padding to the leftover data so that it occupies one block, and then encrypts or decrypts the padded data.

If you perform the final step before performing the update steps, or perform the final step when there is no data to process, the behavior is undefined. You can also encounter runtime errors.

## Fix

Perform encryption or decryption in this sequence:

- Initialization of cipher context
- Update steps
- Final step
- Cleanup of context

## Examples

### Missing Update Steps for Encryption Before Final Step

```
#include <openssl/evp.h>
#include <stdlib.h>
```

```
#define SIZE16 16

unsigned char *out_buf;
int out_len;
unsigned char key[SIZE16];
unsigned char iv[SIZE16];

void func(void) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);

    /* Initialization of cipher context */
    EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);

    /* Missing update steps for encryption */

    /* Final encryption step */
    EVP_EncryptFinal_ex(ctx, out_buf, &out_len);
}
```

In this example, after the cipher context is initialized, there are no update steps for encrypting the data. The update steps are supposed to encrypt one or more blocks of data, leaving the final step to encrypt data that is left over in a partial block. If you perform the final step without previous update steps, the behavior is undefined.

Perform update steps for encryption before the final step. In the corrected code below, the routine `EVP_EncryptUpdate` performs the update steps.

```
#include <openssl/evp.h>
#include <stdlib.h>
#define SIZE16 16

unsigned char *out_buf;
int out_len;
unsigned char key[SIZE16];
unsigned char iv[SIZE16];

void func(unsigned char *src, int len) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);
```

```
/* Initialization of cipher context */
EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);

/* Update steps for encryption */
EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);

/* Final encryption step */
EVP_EncryptFinal_ex(ctx, out_buf, &out_len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_NO\_DATA

**Impact:** Medium

**CWE ID:** 311, 325, 372, 664

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Missing cipher final step

You do not perform a final step after update steps for encrypting or decrypting data

### Description

**Missing cipher final step** occurs when you do not perform a final step after your update steps for encrypting or decrypting data.

For instance, you do the following:

```
/* Initialization of cipher context */
ret = EVP_EncryptInit_ex(&ctx, EVP_aes_128_cbc(), NULL, key, iv);
...
/* Update step */
ret = EVP_EncryptUpdate(&ctx, out_buf, &out_len, src, len);
...
/* Missing final step */
...
/* Cleanup of cipher context */
EVP_CIPHER_CTX_cleanup(ctx);
```

### Risk

Block ciphers break your data into blocks of fixed size. During encryption or decryption, the update step encrypts or decrypts your data in blocks. Any leftover data is encrypted or decrypted by the final step. The final step adds padding to the leftover data so that it occupies one block, and then encrypts or decrypts the padded data.

If you do not perform the final step, leftover data remaining in a partial block is not encrypted or decrypted. You can face incomplete or unexpected output.

### Fix

After your update steps for encryption or decryption, perform a final step to encrypt or decrypt leftover data.

```
/* Initialization of cipher context */
ret = EVP_EncryptInit_ex(&ctx, EVP_aes_128_cbc(), NULL, key, iv);
```

```
...
/* Update step(s) */
ret = EVP_EncryptUpdate(&ctx, out_buf, &out_len, src, len);
...
/* Final step */
ret = EVP_EncryptFinal_ex(&ctx, out_buf, &out_len);
...
/* Cleanup of cipher context */
EVP_CIPHER_CTX_cleanup(ctx);
```

## Examples

### Cleanup of Cipher Context Before Final Step

```
#include <openssl/evp.h>
#include <stdlib.h>
#define SIZE16 16

unsigned char *out_buf;
int out_len;
unsigned char key[SIZE16];
unsigned char iv[SIZE16];

void func(unsigned char *src, int len) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);

    /* Initialization of cipher context */
    EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);

    /* Update steps for encryption */
    EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);

    /* Missing final encryption step */

    /* Cleanup of cipher context */
    EVP_CIPHER_CTX_cleanup(ctx);
}
```

In this example, the cipher context `ctx` is cleaned up before a final encryption step. The final step is supposed to encrypt leftover data. Without the final step, the encryption is incomplete.

After your update steps for encryption, perform a final encryption step to encrypt leftover data. In the corrected code below, the routine `EVP_EncryptFinal_ex` is used to perform this final step.

```
#include <openssl/evp.h>
#include <stdlib.h>
#define SIZE16 16

unsigned char *out_buf;
int out_len;
unsigned char key[SIZE16];
unsigned char iv[SIZE16];

void func(unsigned char *src, int len) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);

    /* Initialization of cipher context */
    EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);

    /* Update steps for encryption */
    EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);

    /* Final encryption step */
    EVP_EncryptFinal_ex(ctx, out_buf, &out_len);

    /* Cleanup of cipher context */
    EVP_CIPHER_CTX_cleanup(ctx);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_NO\_FINAL

**Impact:** Medium

**CWE ID:** 311, 325, 372, 664

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Missing cipher key

Context used for encryption or decryption is associated with NULL key or not associated with a key

### Description

**Missing cipher key** occurs when you encrypt or decrypt data using a NULL encryption or decryption key.

---

**Note** You can initialize your cipher context with a NULL key. However, before you encrypt or decrypt your data, you must associate the cipher context with a non-NULL key.

---

### Risk

Encryption or decryption with a NULL key can lead to run-time errors or at least, non-secure ciphertext.

### Fix

Before your encryption or decryption steps

```
ret = EVP_EncryptUpdate(&ctx, out_buf, &out_len, src, len)
```

associate your cipher context ctx with a non-NULL key.

```
ret = EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv)
```

Sometimes, you initialize your cipher context with a non-NULL key

```
ret = EVP_EncryptInit_ex(&ctx, cipher_algo_1, NULL, key, iv)
```

but change the cipher algorithm later. When you change the cipher algorithm, you use a NULL key.

```
ret = EVP_EncryptInit_ex(&ctx, cipher_algo_2, NULL, NULL, NULL)
```

The second statement reinitializes the cipher context completely but with a NULL key. To avoid this issue, every time you initialize a cipher context with an algorithm, associate it with a key.

## Examples

### NULL Key Used for Encryption

```
#include <openssl/evp.h>
#include <stdlib.h>
#define fatal_error() abort()

unsigned char *out_buf;
int out_len;

int func(EVP_CIPHER_CTX *ctx, unsigned char *iv, unsigned char *src, int len){
    if (iv == NULL)
        fatal_error();

    /* Fourth argument is cipher key */
    EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, NULL, iv);

    /* Update step with NULL key */
    return EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
}
```

In this example, the cipher key associated with the context `ctx` is NULL. When you use this context to encrypt your data, you can encounter run-time errors.

Use a strong random number generator to produce the cipher key. The corrected code here uses the function `RAND_bytes` declared in `openssl/rand.h`.

```
#include <openssl/evp.h>
#include <openssl/rand.h>
#include <stdlib.h>
#define fatal_error() abort()
#define SIZE16 16
```

```
unsigned char *out_buf;
int out_len;

int func(EVP_CIPHER_CTX *ctx, unsigned char *iv, unsigned char *src, int len){
    if (iv == NULL)
        fatal_error();
    unsigned char key[SIZE16];
    RAND_bytes(key, 16);

    /* Fourth argument is cipher key */
    EVP_EncryptInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv);

    /* Update step with non-NULL cipher key */
    return EVP_EncryptUpdate(ctx, out_buf, &out_len, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_NO\_KEY

**Impact:** Medium

**CWE ID:** 310, 320, 573, 664

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

# Missing data for encryption, decryption or signing operation

Data provided for public key cryptography operation is NULL or data length is zero

## Description

**Missing data for encryption, decryption or signing operation** occurs when the data provided for an encryption, decryption, signing, or authentication operation is NULL or the data length is zero.

For instance, you unintentionally provide a NULL value for `in` or a zero value for `in_len` in this decryption operation:

```
ret = EVP_PKEY_decrypt(ctx, out, &out_len, in, in_len);
```

Or, you provide a NULL value for `md` or `sig`, or a zero value for `md_len` or `sig_len` in this verification operation:

```
ret = EVP_PKEY_verify(ctx, md, mdlen, sig, siglen);
```

## Risk

With NULL data or zero length, the operation does not occur. The redundant operation often indicates a coding error.

## Fix

Check the placement of the encryption, decryption, or signing operation. If the operation is intended to happen, make sure that the data provided is non-NULL. Set the data length to a nonzero value.

## Examples

### Zero Data Length for Signing Operation

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
int func(EVP_PKEY_CTX * ctx){
    if (ctx == NULL) fatal_error();
    unsigned char* sig = (unsigned char*) "0123456789";
    unsigned char* md = (unsigned char*) "0123456789";

    ret = EVP_PKEY_verify_init(ctx);
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_CTX_set_signature_md(ctx, EVP_sha256());
    if (ret <= 0) fatal_error();
    return EVP_PKEY_verify(ctx, sig, 0, md, 0);
}
```

In this example, the data lengths (third and fifth arguments to `EVP_PKEY_verify`) are zero. The operation fails.

One possible correction is to use a nonzero length for the signature and the data believed to be signed.

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
int func(EVP_PKEY_CTX * ctx){
    if (ctx == NULL) fatal_error();
    unsigned char* sig = (unsigned char*) "0123456789";
    unsigned char* md = (unsigned char*) "0123456789";

    ret = EVP_PKEY_verify_init(ctx);
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_CTX_set_signature_md(ctx, EVP_sha256());
```

```
    if (ret <= 0) fatal_error();
    return EVP_PKEY_verify(ctx, sig, 10, md, 10);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_PKEY\_NO\_DATA

**Impact:** Medium

**CWE ID:** 310, 325, 372, 573

## See Also

Context initialized incorrectly for cryptographic operation |  
Incorrect key for cryptographic algorithm | Missing parameters for key  
generation | Missing peer key | Missing private key | Missing public key |  
Nonsecure parameters for key generation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Missing explicit keyword

Constructor missing the `explicit` specifier

### Description

**Missing explicit keyword** occurs when the declaration of a constructor does not use the `explicit` specifier. The `explicit` specifier prevents implicit conversion from a variable of another type to the current class type.

The defect applies to:

- One-parameter constructors.
- Constructors where all but one parameters have default values.

For instance, `MyClass::MyClass(float f, bool b=true){}`.

### Risk

If you do not declare a constructor `explicit`, compilers can perform unexpected and often unintended type conversions to the class type using the constructor.

The implicit conversion can occur, for instance, when a function accepts a parameter of the class type, but you call the function with an argument of a different type.

### Fix

For better readability of your code and to prevent implicit conversions, in the constructor declaration, place the `explicit` keyword before the constructor name.

If you want to convert from a variable of another type, explicitly call the class constructor and pass the variable as argument.

## Examples

### Missing explicit Keyword

```
class MyClass {
public:
    MyClass(int val);
private:
    int val;
};

void func(MyClass);

void main() {
    MyClass MyClassObject(0);

    func(MyClassObject); // No conversion
    func(MyClass(0));    // Explicit conversion
    func(0);             // Implicit conversion
}
```

In this example, the constructor of `MyClass` is not declared `explicit`. Therefore, the call `func(0)` can perform an implicit conversion from `int` to `MyClass`.

One possible correction is to declare the constructor of `MyClass` as `explicit`. If an operation in your code performs an implicit conversion, the compiler generates an error. Therefore, using the `explicit` keyword, you detect unintended type conversions in the compilation stage.

For instance, in function `main` below, if you add the statement `func(0)`; that performs implicit conversion, the code does not compile.

```
class MyClass {
public:
    explicit MyClass(int val);
private:
    int val;
};

void func(MyClass);

void main() {
```

```
MyClass MyClassObject(0);

func(MyClassObject); // No conversion
func(MyClass(0));    // Explicit conversion
}
```

## **Incorrect Argument Order Preventable Through explicit Keyword**

```
class Month {
    int val;
public:
    Month(int m): val(m) {}
    ~Month() {}
};

class Day {
    int val;
public:
    Day(int d): val(d) {}
    ~Day() {}
};

class Year {
    int val;
public:
    Year(int y): val(y) {}
    ~Year() {}
};

class Date {
    Month mm;
    Day dd;
    Year yyyy;
public:
    Date(const Month & m, const Day & d, const Year & y):mm(m), dd(d), yyyy(y) {}
};

void main() {
    Date(20,1,2000); //Implicit conversion, wrong argument order undetected
}
```

In this example, the constructors for classes `Month`, `Day` and `Year` do not have an `explicit` keyword. They allow implicit conversion from `int` variables to `Month`, `Day` and `Year` variables.

When you create a `Date` variable and use an incorrect argument order for the `Date` constructor, because of the implicit conversion, your code compiles. You might not detect that you have switched the month value and the day value.

If you use the `explicit` keyword for the constructors of classes `Month`, `Day` and `Year`, you cannot call the `Date` constructor with an incorrect argument order.

- If you call the `Date` constructor with `int` variables, your code does not compile because the `explicit` keyword prevents implicit conversion from `int` variables.
- If you call the `Date` constructor with the arguments explicitly converted to `Month`, `Day` and `Year`, and have the wrong argument order, your code does not compile because of the argument type mismatch.

```
class Month {
    int val;
public:
    explicit Month(int m): val(m) {}
    ~Month() {}
};

class Day {
    int val;
public:
    explicit Day(int d): val(d) {}
    ~Day() {}
};

class Year {
    int val;
public:
    explicit Year(int y): val(y) {}
    ~Year() {}
};

class Date {
    Month mm;
    Day dd;
    Year yyyy;
```

```
public:
    Date(const Month & m, const Day & d, const Year & y):mm(m), dd(d), yyyy(y) {}
};

void main() {
    Date(Month(1),Day(20),Year(2000));
    // Date(20,1,2000); - Does not compile
    // Date(Day(20), Month(1), Year(2000)); - Does not compile
}
```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** Off

**Command-Line Syntax:** MISSING\_EXPLICIT\_KEYWORD

**Impact:** Low

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Missing lock

Unlock function without lock function

## Description

**Missing lock** occurs when a task calls an unlock function before calling the corresponding lock function.

In multitasking code, a lock function begins a critical section of code and an unlock function ends it. When a task `my_task` calls a lock function `my_lock`, other tasks calling `my_lock` must wait till `my_task` calls the corresponding unlock function. Polyspace requires that both lock and unlock functions must have the form `void func(void)`.

To find this defect, you must specify the multitasking options before analysis. To specify these options, on the **Configuration** pane, select **Multitasking**.

## Examples

### Missing lock

```
void begin_critical_section(void);
void end_critical_section(void);

int global_var;

void reset(void)
{
    begin_critical_section();
    global_var = 0;
    end_critical_section();
}

void my_task(void)
```

```

{
  global_var += 1;
  end_critical_section();
}

```

In this example, to emulate multitasking behavior, you must specify the following options:

Option	Specification	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	my_task, reset	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	begin_critical_section	end_critical_section

On the command-line, you can use the following:

```

polyspace-bug-finder-nodesktop
  -entry-points my_task,reset
  -critical-section-begin begin_critical_section:cs1
  -critical-section-end end_critical_section:cs1

```

The example has two entry points, `my_task` and `reset`. `my_task` calls `end_critical_section` before calling `begin_critical_section`.

One possible correction is to call the lock function `begin_critical_section` before the instructions in the critical section.

```

void begin_critical_section(void);
void end_critical_section(void);

int global_var;

void reset(void)
{
  begin_critical_section();
  global_var = 0;
}

```

```
    end_critical_section();
}

void my_task(void)
{
    begin_critical_section();
    global_var += 1;
    end_critical_section();
}
```

## Lock in Condition

```
void begin_critical_section(void);
void end_critical_section(void);

int global_var;

void reset() {
    begin_critical_section();
    global_var=0;
    end_critical_section();
}

void my_task(void) {
    int index=0;
    volatile int numCycles;

    while(numCycles) {
        if(index%10==0) {
            begin_critical_section();
            global_var ++;
        }
        end_critical_section();
        index++;
    }
}
```

In this example, to emulate multitasking behavior, you must specify the following options:

Option	Specification	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	my_task, reset	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	begin_critical_section	end_critical_section

On the command-line, you can use the following:

```
polyspace-bug-finder-nodesktop
  -entry-points my_task,reset
  -critical-section-begin begin_critical_section:cs1
  -critical-section-end end_critical_section:cs1
```

The example has two entry points, my\_task and reset.

In the while loop, my\_task leaves a critical section through the call end\_critical\_section();. In an iteration of the while loop:

- If my\_task enters the if condition branch, the critical section begins through a call to begin\_critical\_section.
- If my\_task does not enter the if condition branch and leaves the while loop, the critical section does not begin. Therefore, a **Missing lock** defect occurs.
- If my\_task does not enter the if condition branch and continues to the next iteration of the while loop, the unlock function end\_critical\_section is called again. A **Double unlock** defect occurs.

Because numCycles is a volatile variable, it can take any value. Any of the cases above are possible. Therefore, a **Missing lock** defect and a **Double unlock** defect appear on the call end\_critical\_section.

## Check Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** BAD\_UNLOCK

**Impact:** Medium  
**CWE ID:** 832  
**CERT C ID:** CON01-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Configure multitasking manually | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file)

### Polyspace Results

Data race including atomic operations | Data race | Data race through standard library function call | Deadlock | Destruction of locked mutex | Double lock | Double unlock | Missing unlock

## Topics

“Configuring Polyspace Multitasking Analysis Manually”

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2014b

## Missing null in string array

String does not terminate with null character

### Description

**Missing null in string array** occurs when a string does not have enough space to terminate with a null character `'\0'`. This defect can cause various memory errors in your code, so is important to fix it.

This defect applies only for projects in C.

### Examples

#### Array size is too small

```
void countdown(int i)
{
    static char one[5]   = "ONE";
    static char two[5]  = "TWO";
    static char three[5] = "THREE";
}
```

The character array `three` has a size of 5 and 5 characters 'T', 'H', 'R', 'E', and 'E'. There is no room for the null character at the end because `three` is only five bytes large.

One possible correction is to change the array size to allow for the five characters plus a null character.

```
void countdown(int i)
{
    static char one[5]   = "ONE";
    static char two[5]  = "TWO";
    static char three[6] = "THREE";
}
```

One possible correction is to initialize the string by leaving the array size blank. This initialization method allocates enough memory for the five characters and a terminating-null character.

```
void countdown(int i)
{
    static char one[5]   = "ONE";
    static char two[5]   = "TWO";
    static char three[] = "THREE";
}
```

## Check Information

**Group:** Programming

**Language:** C

**Default:** On for handwritten code, off for generated code

**Command-Line Syntax:** MISSING\_NULL\_CHAR

**Impact:** Low

**CWE ID:** 170

**CERT C ID:** STR11-C, STR31-C

**CERT C++ ID:** STR31-C, STR50-CPP

**ISO/IEC TS 17961 ID:** NONNULLCS, TAINTFORMATIO

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Missing padding for RSA algorithm

Context used in encryption or signing operation is not associated with any padding

### Description

**Missing padding for RSA algorithm** occurs when you perform RSA encryption or signature by using a context object without associating the object with a padding scheme.

For instance, you perform encryption by using a context object that was initially not associated with a specific padding.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_NO_PADDING);  
...  
ret = EVP_PKEY_encrypt(ctx, out, &out_len, in, in_len)
```

### Risk

Padding schemes remove determinism from the RSA algorithm and protect RSA operations from certain kinds of attack. Padding ensures that a given message does not lead to the same ciphertext each time it is encrypted. Without padding, an attacker can launch chosen-plaintext attacks against the cryptosystem.

### Fix

Before performing an RSA operation, associate the context object with a padding scheme that is compatible with the operation.

- Encryption: Use the OAEP padding scheme.

For instance, use the `EVP_PKEY_CTX_set_rsa_padding` function with the argument `RSA_PKCS1_OAEP_PADDING` or the `RSA_padding_add_PKCS1_OAEP` function.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_OAEP_PADDING);
```

You can also use the PKCS#1v1.5 or SSLv23 schemes. Be aware that these schemes are considered insecure.

You can then use functions such as `EVP_PKEY_encrypt / EVP_PKEY_decrypt` or `RSA_public_encrypt / RSA_private_decrypt` on the context.

- Signature: Use the RSA-PSS padding scheme.

For instance, use the `EVP_PKEY_CTX_set_rsa_padding` function with the argument `RSA_PKCS1_PSS_PADDING`.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_PSS_PADDING);
```

You can also use the ANSI X9.31, PKCS#1v1.5, or SSLv23 schemes. Be aware that these schemes are considered insecure.

You can then use functions such as the `EVP_PKEY_sign-EVP_PKEY_verify` pair or the `RSA_private_encrypt-RSA_public_decrypt` pair on the context.

If you perform two kinds of operation with the same context, after the first operation, reset the padding scheme in the context before the second operation.

## Examples

### Encryption Without Padding

```
#include <stddef.h>
#include <openssl/rsa.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(unsigned char *src, size_t len){
    EVP_PKEY_CTX *ctx;
    EVP_PKEY* pkey;

    /* Key generation */
    ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA,NULL);
    if (ctx == NULL) fatal_error();
```

```
ret = EVP_PKEY_keygen_init(ctx);
if (ret <= 0) fatal_error();
ret = EVP_PKEY_CTX_set_rsa_keygen_bits(ctx, 2048);
if (ret <= 0) fatal_error();
ret = EVP_PKEY_keygen(ctx, &pkey);
if (ret <= 0) fatal_error();

/* Encryption */
EVP_PKEY_CTX_free(ctx);
ctx = EVP_PKEY_CTX_new(pkey, NULL);
if (ctx == NULL) fatal_error();

ret = EVP_PKEY_encrypt_init(ctx);
if (ret <= 0) fatal_error();
return EVP_PKEY_encrypt(ctx, out_buf, &out_len, src, len);
}
```

In this example, before encryption with `EVP_PKEY_encrypt`, a specific padding is not associated with the context object `ctx`.

One possible correction is to set the OAEP padding scheme in the context.

```
#include <stddef.h>
#include <openssl/rsa.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(unsigned char *src, size_t len){
    EVP_PKEY_CTX *ctx;
    EVP_PKEY* pkey;

    /* Key generation */
    ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_keygen_init(ctx);
```

```
if (ret <= 0) fatal_error();
ret = EVP_PKEY_CTX_set_rsa_keygen_bits(ctx, 2048);
if (ret <= 0) fatal_error();
ret = EVP_PKEY_keygen(ctx, &pkey);
if (ret <= 0) fatal_error();

/* Encryption */
EVP_PKEY_CTX_free(ctx);
ctx = EVP_PKEY_CTX_new(pkey, NULL);
if (ctx == NULL) fatal_error();

ret = EVP_PKEY_encrypt_init(ctx);
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_OAEP_PADDING);
if (ret <= 0) fatal_error();
if (ret <= 0) fatal_error();
return EVP_PKEY_encrypt(ctx, out_buf, &out_len, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_RSA\_NO\_PADDING

**Impact:** Medium

**CWE ID:** 310, 326, 327, 780

## See Also

Incompatible padding for RSA algorithm operation|Missing blinding for RSA algorithm|Nonsecure RSA public exponent|Weak padding for RSA algorithm

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Missing parameters for key generation

Context used for key generation is associated with NULL parameters

### Description

**Missing parameters for key generation** occurs when you perform a key generation step with a context object without first associating the object with required parameters.

For instance, you associate a `EVP_PKEY_CTX` context object with an empty `EVP_PKEY` object params before key generation :

```
EVP_PKEY * params = EVP_PKEY_new();  
...  
EVP_PKEY_CTX * ctx = EVP_PKEY_CTX_new(params, NULL);  
...  
EVP_PKEY_keygen(ctx, &pkey);
```

### Risk

Without appropriate parameters, the key generation step does not occur. The redundant operation often indicates a coding error.

### Fix

Check the placement of the key generation step. If the operation is intended, make sure that the parameters are set before key generation.

Certain algorithms use default parameters. For instance, if you specify the DSA algorithm when creating the `EVP_PKEY_CTX` object, a default key length of 1024 bits is used:

```
kctx = EVP_PKEY_CTX_new_id(EVP_PKEY_DSA, NULL);
```

Specifying the algorithm during context creation is sufficient to avoid this defect. Only if you use the Elliptic Curve (EC) algorithm, you must also specify the curve explicitly before key generation.

However, the default parameters can generate keys that are too weak for encryption. Weak parameters can trigger another defect. To change default parameters, use functions specific to the algorithm. For instance, to set parameters, you can use these functions:

- Diffie-Hellman (DH): Use `EVP_PKEY_CTX_set_dh_paramgen_prime_len` and `EVP_PKEY_CTX_set_dh_paramgen_generator`.
- Digital Signature Algorithm (DSA): Use `EVP_PKEY_CTX_set_dsa_paramgen_bits`.
- RSA: Use `EVP_PKEY_CTX_set_rsa_padding`, `EVP_PKEY_CTX_set_rsa_pss_saltlen`, `EVP_PKEY_CTX_set_rsa_keygen_bits`, and `EVP_PKEY_CTX_set_rsa_keygen_pubexp`.
- Elliptic curve (EC): Use `EVP_PKEY_CTX_set_ec_paramgen_curve_nid` and `EVP_PKEY_CTX_set_ec_param_enc`.

## Examples

### Empty Parameters During Key Generation

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
int func(EVP_PKEY *pkey){
    EVP_PKEY * params = EVP_PKEY_new();
    if (params == NULL) fatal_error();

    EVP_PKEY_CTX * ctx = EVP_PKEY_CTX_new(params, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_keygen_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_keygen(ctx, &pkey);
}
```

In this example, the context object `ctx` is associated with an empty parameter object `params`. The context object does not have the required parameters for key generation.

One possible correction is to specify an algorithm, such as RSA, during context creation. For stronger encryption, use 2048 bits for key length instead of the default 1024 bits.

```
#include <openssl/evp.h>
#include <openssl/rsa.h>

#define fatal_error() exit(-1)

int ret;
int func(EVP_PKEY *pkey){
    EVP_PKEY_CTX * ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_keygen_init(ctx);
    if (ret <= 0) fatal_error();

    ret = EVP_PKEY_CTX_set_rsa_keygen_bits(ctx, 2048);
    if (ret <= 0) fatal_error();

    return EVP_PKEY_keygen(ctx, &pkey);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_PKEY\_NO\_PARAMS

**Impact:** Medium

**CWE ID:** 310, 325, 372, 573

## See Also

Context initialized incorrectly for cryptographic operation |  
Incorrect key for cryptographic algorithm | Missing data for  
encryption, decryption or signing | Missing peer key | Missing private  
key | Missing public key | Nonsecure parameters for key generation

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Missing peer key

Context used for shared secret derivation is associated with NULL peer key or not associated with a peer key at all

### Description

**Missing peer key** occurs when you use a context object for shared secret derivation but you have not previously associated the object with a non-NULL peer key.

For instance, you initialize the context object, and then use the object for shared secret derivation without an intermediate step where the object is associated with a peer key:

```
EVP_PKEY_derive_init(ctx);  
/* Missing step for associating peer key with context */  
ret = EVP_PKEY_derive(ctx, out_buf, &out_len);
```

The counterpart checker `Missing private key` checks for a private key in shared secret derivation.

### Risk

Without a peer key, the shared secret derivation step does not occur. The redundant operation often indicates a coding error.

### Fix

Check the placement of the shared secret derivation step. If the operation is intended, make sure that you have completed these steps prior to the operation:

- Generate a non-NULL peer key.

For instance:

```
EVP_PKEY* peerkey = NULL;  
EVP_PKEY_keygen(EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL), &peerkey);
```

- Associate a non-NULL context object with the peer key.

For instance:

```
EVP_PKEY_derive_set_peer(ctx,peerkey);
```

## Examples

### Missing Step for Associating Peer Key with Context

```
#include <stddef.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(EVP_PKEY *pkey){
    if (pkey == NULL) fatal_error();

    EVP_PKEY_CTX *ctx = EVP_PKEY_CTX_new(pkey, NULL);
    if (ctx == NULL) fatal_error();
    ret = EVP_PKEY_derive_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_derive(ctx, out_buf, &out_len);
}
```

In this example, the context object `ctx` is associated with a private key but not a peer key. The `EVP_PKEY_derive` function uses this context object for shared secret derivation.

One possible correction is to use the function `EVP_PKEY_derive_set_peer` and associate a peer key with the context object. Make sure that the peer key is non-NULL.

```
#include <stddef.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
```

```
unsigned char *out_buf;
size_t out_len;

int func(EVP_PKEY *pkey, EVP_PKEY* peerkey){
    if (pkey == NULL) fatal_error();
    if (peerkey == NULL) fatal_error();

    EVP_PKEY_CTX *ctx = EVP_PKEY_CTX_new(pkey, NULL);
    if (ctx == NULL) fatal_error();
    ret = EVP_PKEY_derive_init(ctx);
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_derive_set_peer(ctx,peerkey);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_derive(ctx, out_buf, &out_len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_PKEY\_NO\_PEER

**Impact:** Medium

**CWE ID:** 310, 320, 573, 664

## See Also

Context initialized incorrectly for cryptographic operation |  
Incorrect key for cryptographic algorithm | Missing parameters for key  
generation | Missing data for encryption, decryption or signing |  
Missing private key | Missing public key | Nonsecure parameters for key  
generation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Missing private key

Context used for cryptography operation is associated with NULL private key or not associated with a private key at all

### Description

**Missing private key** occurs when you use a context object for decryption, signature, or shared secret derivation but you have not previously associated the object with a non-NULL private key.

For instance, you initialize the context object with a NULL private key and use the object for decryption later.

```
ctx = EVP_PKEY_CTX_new(pkey, NULL);  
...  
ret = EVP_PKEY_decrypt_init(ctx);  
...  
ret = EVP_PKEY_decrypt(ctx, out, &out_len, in, in_len);
```

The counterpart checker **Missing public key** checks for a public key in encryption and authentication operations. The checker **Missing peer key** checks for a peer key in shared secret derivation.

### Risk

Without a private key, the decryption, signature, or shared secret derivation step does not occur. The redundant operation often indicates a coding error.

### Fix

Check the placement of the operation (decryption, signature, or shared secret derivation). If the operation is intended, make sure you have completed these steps prior to the operation:

- Generate a non-NULL private key.

For instance:

```
EVP_PKEY *pkey = NULL;
kctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);

EVP_PKEY_keygen_init(kctx);
EVP_PKEY_CTX_set_rsa_keygen_bits(kctx, RSA_2048BITS);
EVP_PKEY_keygen(kctx, &pkey);
```

- Associate a non-NULL context object with the private key.

For instance:

```
ctx = EVP_PKEY_CTX_new(pkey, NULL);
```

Note: If you use `EVP_PKEY_CTX_new_id` instead of `EVP_PKEY_CTX_new`, you are not associating the context object with a private key.

## Examples

### Missing Step for Associating Private Key with Context

```
#include <stddef.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(unsigned char *src, size_t len){
    EVP_PKEY_CTX *ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_decrypt_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_decrypt(ctx, out_buf, &out_len, src, len);
}
```

In this example, the context object `ctx` is initialized with `EVP_PKEY_CTX_new_id` instead of `EVP_PKEY_CTX_new`. The function `EVP_PKEY_CTX_new_id` does not associate the context object with a key. However, the `EVP_PKEY_decrypt` function uses this object for decryption.

One possible correction is to use the `EVP_PKEY_CTX_new` function for context initialization and associate a private key with the context object. In the following correction, the private key `pkey` is obtained from an external source and checked for `NULL` before use.

```
#include <stddef.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(unsigned char *src, size_t len, EVP_PKEY *pkey){
    if (pkey == NULL) fatal_error();

    EVP_PKEY_CTX *ctx = EVP_PKEY_CTX_new(pkey, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_decrypt_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_decrypt(ctx, out_buf, &out_len, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** `CRYPTO_PKEY_NO_PRIVATE_KEY`

**Impact:** Medium

**CWE ID:** 310, 320, 573, 664

## See Also

Context initialized incorrectly for cryptographic operation |  
Incorrect key for cryptographic algorithm | Missing parameters for key  
generation | Missing data for encryption, decryption or signing |

Missing peer key | Missing public key | Nonsecure parameters for key generation

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Missing public key

Context used for cryptography operation is associated with NULL public key or not associated with a public key at all

### Description

**Missing public key** occurs when you use a context object for encryption or signature authentication but you have not previously associated the object with a non-NULL public key.

For instance, you initialize the context object with a NULL public key and use the object for encryption later.

```
ctx = EVP_PKEY_CTX_new(pkey, NULL);  
...  
ret = EVP_PKEY_encrypt_init(ctx);  
...  
ret = EVP_PKEY_encrypt(ctx, out, &out_len, in, in_len);
```

The counterpart checker **Missing private key** checks for a private key in decryption and signature operations.

### Risk

Without a public key, the encryption or signature authentication step does not happen. The redundant operation often indicates a coding error.

### Fix

Check the placement of the operation (encryption or signature authentication). If the operation is intended to happen, make sure you have done these steps prior to the operation:

- You generated a non-NULL public key.

For instance:

```
EVP_PKEY *pkey = NULL;
kctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);

EVP_PKEY_keygen_init(kctx);
EVP_PKEY_CTX_set_rsa_keygen_bits(kctx, RSA_2048BITS);
EVP_PKEY_keygen(kctx, &pkey);
```

- You associated a non-NULL context object with the public key.

For instance:

```
ctx = EVP_PKEY_CTX_new(pkey, NULL);
```

Note: If you use `EVP_PKEY_CTX_new_id` instead of `EVP_PKEY_CTX_new`, you are not associating the context object with a public key.

## Examples

### Missing Step for Associating Private Key with Context

```
#include <stddef.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(unsigned char *src, size_t len){
    EVP_PKEY_CTX *ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_encrypt_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_encrypt(ctx, out_buf, &out_len, src, len);
}
```

In this example, the context object `ctx` is initialized with `EVP_PKEY_CTX_new_id` instead of `EVP_PKEY_CTX_new`. The function `EVP_PKEY_CTX_new_id` does not associate the context object with a key. However, the `EVP_PKEY_encrypt` function uses this object for decryption.

One possible correction is to use the `EVP_PKEY_CTX_new` function for context initialization and associate a public key with the context object. In the following correction, the public key `pkey` is obtained from an external source and checked for `NULL` before use.

```
#include <stddef.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
size_t out_len;

int func(unsigned char *src, size_t len, EVP_PKEY *pkey){
    if (pkey == NULL) fatal_error();

    EVP_PKEY_CTX *ctx = EVP_PKEY_CTX_new(pkey, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_encrypt_init(ctx);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_encrypt(ctx, out_buf, &out_len, src, len);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** `CRYPTO_PKEY_NO_PUBLIC_KEY`

**Impact:** Medium

**CWE ID:** 310, 320, 573, 664

## See Also

Context initialized incorrectly for cryptographic operation |  
Incorrect key for cryptographic algorithm | Missing parameters for key  
generation | Missing data for encryption, decryption or signing |

Missing peer key | Missing private key | Nonsecure parameters for key generation

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

# Missing reset of a freed pointer

Pointer free not followed by a reset statement to clear leftover data

## Description

**Missing reset of a freed pointer** detects pointers that have been freed and not reassigned another value. After freeing a pointer, the memory data is still accessible. To clear this data, the pointer must also be set to NULL or another value.

## Risk

Not resetting pointers can cause dangling pointers. Dangling pointers can cause:

- Freeing already freed memory.
- Reading from or writing to already freed memory.
- Hackers executing code stored in freed pointers or with vulnerable permissions.

## Fix

After freeing a pointer, if it is not immediately assigned to another valid address, set the pointer to NULL.

## Examples

### Free Without Reset

```
#include <stdlib.h>
enum {
    SIZE3    = 3,
    SIZE20   = 20
};

void missingfreedptrreset()
{
```

```
static char *str = NULL;

if (str == NULL)
    str = (char *)malloc(SIZE20);

if (str != NULL)
    free(str);
}
```

In this example, the pointer `str` is freed at the end of the program. The next call to `bug_missingfreedptrrese` can fail because `str` is not `NULL` and the initialization to `NULL` can be invalid.

One possible correction is to customize `free` so that when you free a pointer, it is automatically reset.

```
#include <stdlib.h>
enum {
    SIZE3   = 3,
    SIZE20  = 20
};

static void sanitize_free(void **p)
{
    if ((p != NULL) && (*p != NULL))
    {
        free(*p);
        *p = NULL;
    }
}

#define free(X) sanitize_free((void **)&X)

void missingfreedptrreset()
{
    static char *str = NULL;

    if (str == NULL)
        str = (char *)malloc(SIZE20);

    if (str != ((void *)0))
    {
        free(str);
    }
}
```

```
}  
}
```

## Result Information

**Group:** Good Practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MISSING\_FREED\_PTR\_RESET

**Impact:** Low

**CWE ID:** 415, 416, 825

**CERT C ID:** MEM01-C

## See Also

Use of previously freed pointer | Invalid free of pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

## Missing return statement

Function does not return value though return type is not void

### Description

**Missing return statement** occurs when a function does not return a value along at least one execution path. If the return type of the function is void, this error does not occur.

### Examples

#### Missing or invalid return statement error

```
int AddSquares(int n)
{
    int i=0;
    int sum=0;

    if(n!=0)
    {
        for(i=1;i<=n;i++)
        {
            sum+=i^2;
        }
        return(sum);
    }
}
/* Defect: No return value if n is not 0*/
```

If  $n$  is equal to 0, the code does not enter the `if` statement. Therefore, the function `AddSquares` does not return a value if  $n$  is 0.

One possible correction is to return a value in every branch of the `if...else` statement.

```
int AddSquares(int n)
{
    int i=0;
```

```
int sum=0;

if(n!=0)
{
    for(i=1;i<=n;i++)
    {
        sum+=i^2;
    }
    return(sum);
}

/*Fix: Place a return statement on branches of if-else */
else
    return 0;
}
```

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** MISSING\_RETURN

**Impact:** Low

**CERT C ID:** MSC37-C

**CERT C++ ID:** MSC37-C, MSC52-CPP

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Missing unlock

Lock function without unlock function

### Description

**Missing unlock** occurs when:

- A task calls a lock function.
- The task ends without a call to an unlock function.

In multitasking code, a lock function begins a critical section of code and an unlock function ends it. When a task, `my_task`, calls a lock function, `my_lock`, other tasks calling `my_lock` must wait until `my_task` calls the corresponding unlock function. Polyspace requires that both lock and unlock functions must have the form `void func(void)`.

To find this defect, before analysis, you must specify the multitasking options. On the **Configuration** pane, select **Multitasking**.

### Examples

#### Missing Unlock

```
void begin_critical_section(void);
void end_critical_section(void);

int global_var;

void reset()
{
    begin_critical_section();
    global_var = 0;
    end_critical_section();
}
```

```

}

void my_task(void)
{
    begin_critical_section();
    global_var += 1;
}

```

In this example, to emulate multitasking behavior, specify the following options:

Option	Value	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	my_task, reset	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	begin_critical_section	end_critical_section

On the command-line, you can use the following:

```

polyspace-bug-finder-nodesktop
  -entry-points my_task,reset
  -critical-section-begin begin_critical_section:cs1
  -critical-section-end end_critical_section:cs1

```

The example has two entry points, `my_task` and `reset`. `my_task` enters a critical section through the call `begin_critical_section()`; `my_task` ends without calling `end_critical_section`.

One possible correction is to call the unlock function `end_critical_section` after the instructions in the critical section.

```

void begin_critical_section(void);
void end_critical_section(void);

int global_var;

```

```
void reset(void)
{
    begin_critical_section();
    global_var = 0;
    end_critical_section();
}

void my_task(void)
{
    begin_critical_section();
    global_var += 1;
    end_critical_section();
}
```

## Unlock in Condition

```
void begin_critical_section(void);
void end_critical_section(void);

int global_var;

void reset() {
    begin_critical_section();
    global_var=0;
    end_critical_section();
}

void my_task(void) {
    int index=0;
    volatile int numCycles;

    while(numCycles) {
        begin_critical_section();
        global_var ++;
        if(index%10==0) {
            global_var = 0;
            end_critical_section();
        }
        index++;
    }
}
```

In this example, to emulate multitasking behavior, specify the following options.

Option	Specification	
<b>Configure multitasking manually</b> on page 1-114	<input checked="" type="checkbox"/>	
<b>Tasks</b> on page 1-119	my_task, reset	
<b>Critical section details</b> on page 1-131	<b>Starting routine</b>	<b>Ending routine</b>
	begin_critical_section	end_critical_section

On the command-line, you can use the following:

```
polyspace-bug-finder-nodesktop
  -entry-points my_task,reset
  -critical-section-begin begin_critical_section:cs1
  -critical-section-end end_critical_section:cs1
```

The example has two entry points, `my_task` and `reset`.

In the while loop, `my_task` enters a critical section through the call `begin_critical_section()`; . In an iteration of the while loop:

- If `my_task` enters the `if` condition branch, the critical section ends through a call to `end_critical_section`.
- If `my_task` does not enter the `if` condition branch and leaves the while loop, the critical section does not end. Therefore, a **Missing unlock** defect occurs.
- If `my_task` does not enter the `if` condition branch and continues to the next iteration of the while loop, the lock function `begin_critical_section` is called again. A **Double lock** defect occurs.

Because `numCycles` is a `volatile` variable, it can take any value. Any of the cases above is possible. Therefore, a **Missing unlock** defect and a **Double lock** defect appear on the call `begin_critical_section`.

One possible correction is to call the unlock function `end_critical_section` outside the `if` condition.

```
void begin_critical_section(void);
void end_critical_section(void);

int global_var;

void reset() {
    begin_critical_section();
    global_var=0;
    end_critical_section();
}

void my_task(void) {
    int index=0;
    volatile int numCycles;

    while(numCycles) {
        begin_critical_section();
        global_var ++;
        if(index%10==0) {
            global_var=0;
        }
        end_critical_section();
        index++;
    }
}
```

Another possible correction is to call the unlock function `end_critical_section` in every branches of the `if` condition.

```
void begin_critical_section(void);
void end_critical_section(void);

int global_var;

void reset() {
    begin_critical_section();
    global_var=0;
    end_critical_section();
}
```

```
void my_task(void) {
    int index=0;
    volatile int numCycles;

    while(numCycles) {
        begin_critical_section();
        global_var ++;
        if(index%10==0) {
            global_var=0;
            end_critical_section();
        }
        else
            end_critical_section();
        index++;
    }
}
```

## Check Information

**Group:** Concurrency

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** BAD\_LOCK

**Impact:** High

**CWE ID:** 667

**CERT C ID:** CON01-C, MEM12-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers) | Configure multitasking manually | Tasks (-entry-points) | Critical section details (-critical-section-begin -critical-section-end) | Temporally exclusive tasks (-temporal-exclusions-file)

### Polyspace Results

Data race including atomic operations | Data race | Data race through standard library function call | Deadlock | Destruction of locked mutex | Double lock | Double unlock | Missing lock

## **Topics**

“Configuring Polyspace Multitasking Analysis Manually”

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2014b**

# Missing virtual inheritance

A base class is inherited virtually and nonvirtually in the same hierarchy

## Description

**Missing virtual inheritance** occurs when:

- A class is derived from multiple base classes, and some of those base classes are themselves derived from a common base class.

For instance, a class `Final` is derived from two classes, `Intermediate_left` and `Intermediate_right`. Both `Intermediate_left` and `Intermediate_right` are derived from a common class, `Base`.

- At least one of the inheritances from the common base class is `virtual` and at least one is not `virtual`.

For instance, the inheritance of `Intermediate_right` from `Base` is `virtual`. The inheritance of `Intermediate_left` from `Base` is not `virtual`.

## Risk

If this defect appears, multiple copies of the base class data members appear in the final derived class object. To access the correct copy of the base class data member, you have to qualify the member and method name appropriately in the final derived class. The development is error-prone.

For instance, when the defect occurs, two copies of the base class data members appear in an object of class `Final`. If you do not qualify method names appropriately in the class `Final`, you can assign a value to a `Base` data member but not retrieve the same value.

- You assign the value using a `Base` method accessed through `Intermediate_left`. Therefore, you assign the value to one copy of the `Base` member.
- You retrieve the value using a `Base` method accessed through `Intermediate_right`. Therefore, you retrieve a different copy of the `Base` member.

## Fix

Declare all the intermediate inheritances as `virtual` when a class is derived from multiple base classes that are themselves derived from a common base class.

If you indeed want multiple copies of the Base data members as represented in the intermediate derived classes, use aggregation instead of inheritance. For instance, declare two objects of class `Intermediate_left` and `Intermediate_right` in the Final class.

## Examples

### Missing Virtual Inheritance

```
#include <stdio.h>
class Base {
public:
    explicit Base(int i): m_b(i) {};
    virtual ~Base() {};
    virtual int get() const {
        return m_b;
    }
    virtual void set(int b) {
        m_b = b;
    }
private:
    int m_b;
};

class Intermediate_left: virtual public Base {
public:
    Intermediate_left():Base(0), m_d1(0) {};
private:
    int m_d1;
};

class Intermediate_right: public Base {
public:
    Intermediate_right():Base(0), m_d2(0) {};
private:
    int m_d2;
};
```

```

};

class Final: public Intermediate_left, Intermediate_right {
public:
    Final(): Base(0), Intermediate_left(), Intermediate_right() {};
    int get() const {
        return Intermediate_left::get();
    }
    void set(int b) {
        Intermediate_right::set(b);
    }
    int get2() const {
        return Intermediate_right::get();
    }
};

int main(int argc, char* argv[]) {
    Final d;
    int val = 12;
    d.set(val);
    int res = d.get();
    printf("d.get=%d\n",res);           // Result: d.get=0
    printf("d.get2=%d\n",d.get2());    // Result: d.get2=12
    return res;
}

```

In this example, `Final` is derived from both `Intermediate_left` and `Intermediate_right`. `Intermediate_left` is derived from `Base` in a non-virtual manner and `Intermediate_right` is derived from `Base` in a virtual manner. Therefore, two copies of the base class and the data member `m_b` are present in the final derived class,

Both derived classes `Intermediate_left` and `Intermediate_right` do not override the `Base` class methods `get` and `set`. However, `Final` overrides both methods. In the overridden `get` method, it calls `Base::get` through `Intermediate_left`. In the overridden `set` method, it calls `Base::set` through `Intermediate_right`.

Following the statement `d.set(val)`, `Intermediate_right`'s copy of `m_b` is set to 12. However, `Intermediate_left`'s copy of `m_b` is still zero. Therefore, when you call `d.get()`, you obtain a value zero.

Using the `printf` statements, you can see that you retrieve a value that is different from the value that you set.

The defect appears in the final derived class definition and on the name of the class that are derived virtually from the common base class. Following are some tips for navigating in the source code:

- To find the definition of a class, on the **Source** pane, right-click the class name and select **Go To Definition**.
- To navigate up the class hierarchy, first navigate to the intermediate class definition. In the intermediate class definition, right-click a base class name and select **Go To Definition**.

One possible correction is to declare both the inheritances from `Base` as `virtual`.

Even though the overridden `get` and `set` methods in `Final` still call `Base::get` and `Base::set` through different classes, only one copy of `m_b` exists in `Final`.

```
#include <stdio.h>
class Base {
public:
    explicit Base(int i): m_b(i) {};
    virtual ~Base() {};
    virtual int get() const {
        return m_b;
    }
    virtual void set(int b) {
        m_b = b;
    }
private:
    int m_b;
};

class Intermediate_left: virtual public Base {
public:
    Intermediate_left():Base(0), m_d1(0) {};
private:
    int m_d1;
};

class Intermediate_right: virtual public Base {
public:
    Intermediate_right():Base(0), m_d2(0) {};
private:
    int m_d2;
};
```

```
class Final: public Intermediate_left, Intermediate_right {
public:
    Final(): Base(0), Intermediate_left(), Intermediate_right() {};
    int get() const {
        return Intermediate_left::get();
    }
    void set(int b) {
        Intermediate_right::set(b);
    }
    int get2() const {
        return Intermediate_right::get();
    }
};

int main(int argc, char* argv[]) {
    Final d;
    int val = 12;
    d.set(val);
    int res = d.get();
    printf("d.get=%d\n",res);           // Result: d.get=12
    printf("d.get2=%d\n",d.get2());    // Result: d.get2=12
    return res;
}
```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** Off

**Command-Line Syntax:** MISSING\_VIRTUAL\_INHERITANCE

**Impact:** Medium

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Misuse of a FILE object

Use of copy of FILE object

## Description

**Misuse of a FILE object** occurs when:

- You dereference a pointer to a FILE object, including indirect dereference by using `memcpy()`.
- You modify an entire FILE object or one of its components through its pointer.
- You take the address of FILE object that was not returned from a call to an `fopen`-family function. No defect is raised if a macro defines the pointer as the address of a built-in FILE object, such as `#define ptr (&__stdout)`.

## Risk

In some implementations, the address of the pointer to a FILE object used to control a stream is significant. A pointer to a copy of a FILE object is interpreted differently than a pointer to the original object, and can potentially result in operations on the wrong stream. Therefore, the use of a copy of a FILE object can cause the software to stop responding, which an attacker might exploit in denial-of-service attacks.

## Fix

Do not make a copy of a FILE object. Do not use the address of a FILE object that was not returned from a successful call to an `fopen`-family function.

## Examples

### Copy of FILE Object Used in `fputs()`

```
#include <stdio.h>
#include <unistd.h>
```

```
#include <stdlib.h>
#include <string.h>
#include <strings.h>

void fatal_error(void);

int func(void)
{
    /*'stdout' dereferenced and contents
       copied to 'my_stdout'. */
    FILE my_stdout = *stdout;

    /* Address of 'my_stdout' may not point to correct stream. */
    if (fputs("Hello, World!\n", &my_stdout) == EOF)
    {
        /* Handler error */
        fatal_error();
    }
    return 0;
}
```

In this example, FILE object `stdout` is dereferenced and its contents are copied to `my_stdout`. The contents of `stdout` might not be significant. `fputs()` is then called with the address of `my_stdout` as an argument. Because no call to `fopen()` or a similar function was made, the address of `my_stdout` might not point to the correct stream.

Declare `my_stdout` to point to the same address as `stdout` to ensure that you write to the correct stream when you call `fputs()`.

```
#include <stdio.h>
#include <unistd.h>
#include <stdlib.h>
#include <string.h>
#include <strings.h>

void fatal_error(void);

int func(void)
{
    /* 'my_stdout' and 'stdout' point to the same object. */
    FILE *my_stdout = stdout;
```

```
if (fputs("Hello, World!\n", my_stdout) == EOF)
{
    /* Handler error */
    fatal_error();
}
return 0;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** FILE\_OBJECT\_MISUSE

**Impact:** Low

**CERT C ID:** FIO38-C

**CERT C++ ID:** FIO38-C

**ISO/IEC TS 17961 ID:** filecpy

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Misuse of structure with flexible array member

Memory allocation ignores flexible array member

### Description

**Misuse of structure with flexible array member** occurs when:

- You define an object with a flexible array member of unknown size at compilation time.
- You make an assignment between structures with a flexible array member without using `memcpy()` or a similar function.
- You use a structure with a flexible array member as an argument to a function and pass the argument by value.
- Your function returns a structure with a flexible array member.

A flexible array member has no array size specified and is the last element of a structure with at least two named members.

### Risk

If the size of the flexible array member is not defined, it is ignored when allocating memory for the containing structure. Accessing such a structure has undefined behavior.

### Fix

- Use `malloc()` or a similar function to allocate memory for a structure with a flexible array member.
- Use `memcpy()` or a similar function to copy a structure with a flexible array member.
- Pass a structure with a flexible array member as a function argument by pointer.

## Examples

### Structure Passed By Value to Function

```
#include <stddef.h>
#include <stdlib.h>
#include <string.h>
#include <stdio.h>
#include <unistd.h>

struct example_struct
{
    size_t num;
    int data[];
};

extern void arg_by_value(struct example_struct s);

void func(void)
{
    struct example_struct *flex_struct;
    size_t i;
    size_t array_size = 4;
    /* Dynamically allocate memory for the struct */
    flex_struct = (struct example_struct *)
        malloc(sizeof(struct example_struct) + sizeof(int) * array_size);
    if (flex_struct == NULL)
    {
        /* Handle error */
    }
    /* Initialize structure */
    flex_struct->num = array_size;
    for (i = 0; i < array_size; ++i)
    {
        flex_struct->data[i] = 0;
    }
    /* Handle structure */

    /* Argument passed by value. 'data' not
    copied to passed value. */
    arg_by_value(*flex_struct);
}
```

```
    /* Free dynamically allocated memory */
    free(flex_struct);
}
```

In this example, `flex_struct` is passed by value as an argument to `arg_by_value`. As a result, the flexible array member data is not copied to the passed argument.

To ensure that all the members of the structure are copied to the passed argument, pass `flex_struct` to `arg_by_pointer` by pointer.

```
#include <stddef.h>
#include <stdlib.h>
#include <string.h>
#include <stdio.h>
#include <unistd.h>

struct example_struct
{
    size_t num;
    int data[];
};

extern void arg_by_pointer(struct example_struct *s);

void func(void)
{
    struct example_struct *flex_struct;
    size_t i;
    size_t array_size = 4;
    /* Dynamically allocate memory for the struct */
    flex_struct = (struct example_struct *)
        malloc(sizeof(struct example_struct) + sizeof(int) * array_size);
    if (flex_struct == NULL)
    {
        /* Handler error */
    }
    /* Initialize structure */
    flex_struct->num = array_size;
    for (i = 0; i < array_size; ++i)
    {
        flex_struct->data[i] = 0;
    }
}
```

```
    }  
    /* Handle structure */  
  
    /* Structure passed by pointer */  
    arg_by_pointer(flex_struct);  
  
    /* Free dynamically allocated memory */  
    free(flex_struct);  
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** FLEXIBLE\_ARRAY\_MEMBER\_STRUCT\_MISUSE

**Impact:** Low

**CERT C ID:** MEM33-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Misuse of errno

errno incorrectly checked for error conditions

### Description

**Misuse of errno** occurs when you check `errno` for error conditions in situations where checking `errno` does not guarantee the absence of errors. In some cases, checking `errno` can lead to false positives.

For instance, you check `errno` following calls to the functions:

- `fopen`: If you follow the ISO Standard, the function might not set `errno` on errors.
- `atof`: If you follow the ISO Standard, the function does not set `errno`.
- `signal`: The `errno` value indicates an error only if the function returns the `SIG_ERR` error indicator.

### Risk

The ISO C Standard does not enforce that these functions set `errno` on errors. Whether the functions set `errno` or not is implementation-dependent.

To detect errors, if you check `errno` alone, the validity of this check also becomes implementation-dependent.

In some cases, the `errno` value indicates an error only if the function returns a specific error indicator. If you check `errno` before checking the function return value, you can see false positives.

### Fix

For information on how to detect errors, see the documentation for that specific function.

Typically, the functions return an out-of-band error indicator to indicate errors. For instance:

- `fopen` returns a null pointer if an error occurs.
- `signal` returns the `SIG_ERR` error indicator and sets `errno` to a positive value. Check `errno` only after you have checked the function return value.

## Examples

### Incorrectly Checking for `errno` After `fopen` Call

```
#include <stdio.h>
#include <stdlib.h>
#include <errno.h>

#define fatal_error() abort()

const char *temp_filename = "/tmp/demo.txt";

FILE *func()
{
    FILE *fileptr;
    errno = 0;
    fileptr = fopen(temp_filename, "w+b");
    if (errno != 0) {
        if (fileptr != NULL) {
            (void)fclose(fileptr);
        }
        /* Handle error */
        fatal_error();
    }
    return fileptr;
}
```

In this example, `errno` is the first variable that is checked after a call to `fopen`. You might expect that `fopen` changes `errno` to a nonzero value if an error occurs. If you run this code with an implementation of `fopen` that does not set `errno` on errors, you might miss an error condition. In this situation, `fopen` can return a null pointer that escapes detection.

One possible correction is to only check the return value of `fopen` for a null pointer.

```
#include <stdio.h>
#include <stdlib.h>
```

```
#include <errno.h>

#define fatal_error() abort()

const char *temp_filename = "/tmp/demo.txt";

FILE *func()
{
    FILE *fileptr;
    fileptr = fopen(temp_filename, "w+b");
    if (fileptr == NULL) {
        fatal_error();
    }
    return fileptr;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** ERRNO\_MISUSE

**Impact:** High

**CWE ID:** 703

**CERT C ID:** ERR30-C

**CERT C++ ID:** ERR30-C

**ISO/IEC TS 17961 ID:** invernno

## See Also

### Polyspace Results

Errno not reset | Errno not checked | Returned value of a sensitive function not checked | Unsafe conversion from string to numerical value

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Misuse of narrow or wide character string

Narrow (wide) character string passed to wide (narrow) string function

### Description

**Misuse of narrow or wide character string** occurs when you pass a narrow character string to a wide string function, or a wide character string to a narrow string function.

**Misuse of narrow or wide character string** raises no defect on operating systems where narrow and wide character strings have the same size.

### Risk

Using a narrow character string with a wide string function, or vice versa, can result in unexpected or undefined behavior.

If you pass a wide character string to a narrow string function, you can encounter these issues:

- Data truncation. If the string contains null bytes, a copy operation using `strncpy()` can terminate early.
- Incorrect string length. `strlen()` returns the number of characters of a string up to the first null byte. A wide string can have additional characters after its first null byte.

If you pass a narrow character string to a wide string function, you can encounter this issue:

- Buffer overflow. In a copy operation using `wcsncpy()`, the destination string might have insufficient memory to store the result of the copy.

### Fix

Use the narrow string functions with narrow character strings. Use the wide string functions with wide character strings.

## Examples

### Passing Wide Character Strings to `strncpy()`

```
#include <string.h>
#include <wchar.h>

void func(void)
{
    wchar_t wide_str1[] = L"0123456789";
    wchar_t wide_str2[] = L"0000000000";
    strncpy(wide_str2, wide_str1, 10);
}
```

In this example, `strncpy()` copies 10 wide characters from `wide_str1` to `wide_str2`. If `wide_str1` contains null bytes, the copy operation can end prematurely and truncate the wide character string.

One possible correction is to use `wcsncpy()` to copy `wide_str1` to `wide_str2`.

```
#include <string.h>
#include <wchar.h>

void func(void)
{
    wchar_t wide_str1[] = L"0123456789";
    wchar_t wide_str2[] = L"0000000000";
    wcsncpy(wide_str2, wide_str1, 10);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** NARROW\_WIDE\_STR\_MISUSE

**Impact:** High

**CWE ID:** 135

**CERT C ID:** STR38-C

**CERT C++ ID:** STR38-C

### See Also

Array access out of bounds|Destination buffer overflow in string manipulation|Invalid use of standard library routine|Invalid use of standard library string routine|Pointer access out of bounds|Unreliable cast of function pointer|Wrong allocated object size for cast

### Topics

*“Interpret Polyspace Bug Finder Results”*

*“Address Polyspace Results Through Bug Fixes or Comments”*

**Introduced in R2018b**

# Misuse of errno in a signal handler

You read `errno` after calling an `errno`-setting function in a signal handler

## Description

**Misuse of errno in a signal handler** occurs when you call one of these functions in a signal handler:

- `signal`: You call the `signal` function in a signal handler and then read the value of `errno`.

For instance, the signal handler function `handler` calls `signal` and then calls `perror`, which reads `errno`.

```
void handler(int signum) {
    pfv old_handler = signal(signum, SIG_DFL);
    if (old_handler == SIG_ERR) {
        perror("SIGINT handler");
    }
}
```

- `errno`-setting POSIX function: You call an `errno`-setting POSIX function in a signal handler but do not restore `errno` when returning from the signal handler.

For instance, the signal handler function `handler` calls `waitpid`, which changes `errno`, but does not restore `errno` before returning.

```
void handler(int signum) {
    int rc = waitpid(-1, NULL, WNOHANG);
    if (ECHILD != errno) {
    }
}
```

## Risk

In each case that the checker flags, you risk relying on an indeterminate value of `errno`.

- `signal`: If the call to `signal` in a signal handler fails, the value of `errno` is indeterminate (see C11 Standard, Sec. 7.14.1.1). If you rely on a specific value of `errno`, you can see unexpected results.
- `errno`-setting POSIX function: An `errno`-setting function sets `errno` on failure. If you read `errno` after a signal handler is called and the signal handler itself calls an `errno`-setting function, you can see unexpected results.

## Fix

Avoid situations where you risk relying on an indeterminate value of `errno`.

- `signal`: After calling the `signal` function in a signal handler, do not read `errno` or use a function that reads `errno`.
- `errno`-setting POSIX function: Before calling an `errno`-setting function in a signal handler, save `errno` to a temporary variable. Restore `errno` from this variable before returning from the signal handler.

## Examples

### Reading `errno` After `signal` Call in Signal Handler

```
#include <signal.h>
#include <stdlib.h>
#include <stdio.h>

#define fatal_error() abort()

void handler(int signum) {
    if (signal(signum, SIG_DFL) == SIG_ERR) {
        perror("SIGINT handler");
    }
}

int func(void) {
    if (signal(SIGINT, handler) == SIG_ERR) {
        /* Handle error */
        fatal_error();
    }
    /* Program code */
}
```

```

    if (raise(SIGINT) != 0) {
        /* Handle error */
        fatal_error();
    }
    return 0;
}

```

In this example, the function `handler` is called to handle the `SIGINT` signal. In the body of `handler`, the `signal` function is called. Following this call, the value of `errno` is indeterminate. The checker raises a defect when the `perror` function is called because `perror` relies on the value of `errno`.

One possible correction is to not read `errno` after calling the `signal` function in a signal handler. The corrected code here calls the `abort` function via the `fatal_error` macro instead of the `perror` function.

```

#include <signal.h>
#include <stdlib.h>
#include <stdio.h>

#define fatal_error() abort()

void handler(int signum) {
    if (signal(signum, SIG_DFL) == SIG_ERR) {
        fatal_error();
    }
}

int func(void) {
    if (signal(SIGINT, handler) == SIG_ERR) {
        /* Handle error */
        fatal_error();
    }
    /* Program code */
    if (raise(SIGINT) != 0) {
        /* Handle error */
        fatal_error();
    }
    return 0;
}

```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** SIG\_HANDLER\_ERRNO\_MISUSE

**Impact:** Medium

**CERT C ID:** ERR32-C

**CERT C++ ID:** ERR32-C

## See Also

Errno not checked | Errno not reset | Function called from signal handler not asynchronous-safe

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Misuse of readlink()

Third argument of `readlink` does not leave space for null terminator in buffer

### Description

**Misuse of `readlink()`** occurs when you pass a buffer size argument to `readlink()` that does not leave space for a null terminator in the buffer.

For instance:

```
ssize_t len = readlink("/usr/bin/perl", buf, sizeof(buf));
```

The third argument is exactly equal to the size of the second argument. For large enough symbolic links, this use of `readlink()` does not leave space to enter a null terminator.

### Risk

The `readlink()` function copies the content of a symbolic link (first argument) to a buffer (second argument). However, the function does not append a null terminator to the copied content. After using `readlink()`, you must explicitly add a null terminator to the buffer.

If you fill the entire buffer when using `readlink`, you do not leave space for this null terminator.

### Fix

When using the `readlink()` function, make sure that the third argument is one less than the buffer size.

Then, append a null terminator to the buffer. To determine where to add the null terminator, check the return value of `readlink()`. If the return value is `-1`, an error has occurred. Otherwise, the return value is the number of characters (bytes) copied.

## Examples

### Incorrect Size Argument of `readlink`

```
#include <unistd.h>

#define SIZE1024 1024

extern void display_path(const char *);

void func() {
    char buf[SIZE1024];
    ssize_t len = readlink("/usr/bin/perl", buf, sizeof(buf));
    if (len > 0) {
        buf[len - 1] = '\\0';
    }
    display_path(buf);
}
```

In this example, the third argument of `readlink` is exactly the size of the buffer (second argument). If the first argument is long enough, this use of `readlink` does not leave space for the null terminator.

Also, if no characters are copied, the return value of `readlink` is 0. The following statement leads to a buffer underflow when `len` is 0.

```
buf[len - 1] = '\\0';
```

One possible correction is to make sure that the third argument of `readlink` is one less than size of the second argument.

The following corrected code also accounts for `readlink` returning 0.

```
#include <stdlib.h>
#include <unistd.h>

#define fatal_error() abort()
#define SIZE1024 1024

extern void display_path(const char *);

void func() {
```

```
char buf[SIZE1024];
ssize_t len = readlink("/usr/bin/perl", buf, sizeof(buf) - 1);
if (len != -1) {
    buf[len] = '\0';
    display_path(buf);
}
else {
    /* Handle error */
    fatal_error();
}
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** READLINK\_MISUSE

**Impact:** Medium

**CWE ID:** 170

**CERT C ID:** POS30-C

**CERT C++ ID:** POS30-C

## See Also

### Polyspace Results

Array access out of bounds | File access between time of check and use (TOCTOU) | Invalid use of standard library string routine | Pointer access out of bounds | Returned value of a sensitive function not checked

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Misuse of return value from nonreentrant standard function

Pointer to static buffer from previous call is used despite a subsequent call that modifies the buffer

### Description

**Misuse of return value from nonreentrant standard function** occurs when these events happen in this sequence:

- 1 You point to the buffer returned from a nonreentrant standard function such as `getenv` or `setlocale`.

```
user = getenv("USER");
```

- 2 You call that nonreentrant standard function again.

```
user2 = getenv("USER2");
```

- 3 You use or dereference the pointer from the first step expecting the buffer to remain unmodified since that step. In the meantime, the call in the second step has modified the buffer.

For instance:

```
var=*user;
```

In some cases, the defect might appear even if you do not call the `getenv` function a second time but simply return the pointer. For instance:

```
char* func() {  
    user=getenv("USER");  
    .  
    .  
    return user;  
}
```

For information on which functions are covered by this defect, see documentation on nonreentrant standard functions.

## Risk

The C Standard allows nonreentrant functions such as `getenv` to return a pointer to a *static* buffer. Because the buffer is static, a second call to `getenv` modifies the buffer. If you continue to use the pointer returned from the first call past the second call, you can see unexpected results. The buffer that it points to no longer has values from the first call.

The defect appears even if you do not call `getenv` a second time but simply return the pointer. The reason is that someone calling your function might use the returned pointer *after* a second call to `getenv`. By returning the pointer from your call to `getenv`, you make your function unsafe to use.

The same rationale is true for other nonreentrant functions covered by this defect.

## Fix

After the first call to `getenv`, make a copy of the buffer that the returned pointer points to. After the second call to `getenv`, use this copy. Even if the second call modifies the buffer, your copy is untouched.

## Examples

### Return from `getenv` Used After Second Call to `getenv`

```
#include <stdlib.h>
#include <string.h>

int func()
{
    int result = 0;

    char *home = getenv("HOME");    /* First call */
    if (home != NULL) {
        char *user = NULL;
        char *user_name_from_home = strrchr(home, '/');

        if (user_name_from_home != NULL) {
            user = getenv("USER");    /* Second call */
            if ((user != NULL) &&
                (strcmp(user, user_name_from_home) == 0))
```

```
        {
            result = 1;
        }
    }
    return result;
}
```

In this example, the pointer `user_name_from_home` is derived from the pointer `home`. `home` points to the buffer returned from the first call to `getenv`. Therefore, `user_name_from_home` points to a location in the same buffer.

After the second call to `getenv`, the buffer is modified. If you continue to use `user_name_from_home`, you can get unexpected results.

If you want to access the buffer from the first call to `getenv` past the second call, make a copy of the buffer after the first call. One possible correction is to use the `strdup` function to make the copy.

```
#include <stdlib.h>
#include <string.h>

int func()
{
    int result = 0;

    char *home = getenv("HOME");
    if (home != NULL) {
        char *user = NULL;
        char *user_name_from_home = strrchr(home, '/');
        if (user_name_from_home != NULL) {
            /* Make copy before second call */
            char *saved_user_name_from_home = strdup(user_name_from_home);
            if (saved_user_name_from_home != NULL) {
                user = getenv("USER");
                if ((user != NULL) &&
                    (strcmp(user, saved_user_name_from_home) == 0))
                {
                    result = 1;
                }
                free(saved_user_name_from_home);
            }
        }
    }
}
```

```
    }  
    return result;  
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** NON\_REENTRANT\_STD\_RETURN

**Impact:** High

**CERT C ID:** ENV34-C

**CERT C++ ID:** ENV34-C

**ISO/IEC TS 17961 ID:** libuse

## See Also

### Polyspace Results

Modification of internal buffer returned from nonreentrant standard function|Use of obsolete standard function

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Misuse of sign-extended character value

Data type conversion with sign extension causes unexpected behavior

### Description

**Misuse of sign-extended character value** occurs when you convert a signed or plain `char` data type to a wider integer data type with sign extension. You then use the resulting sign-extended value as array index, for comparison with EOF or as argument to a character-handling function.

### Risk

*Comparison with EOF:* Suppose, your compiler implements the plain `char` type as signed. In this implementation, the character with the decimal form of 255 (-1 in two's complement form) is stored as a signed value. When you convert a `char` variable to the wider data type `int` for instance, the sign bit is preserved (sign extension). This sign extension results in the character with the decimal form 255 being converted to the integer -1, which cannot be distinguished from EOF.

*Use as array index:* By similar reasoning, you cannot use sign-extended plain `char` variables as array index. If the sign bit is preserved, the conversion from `char` to `int` can result in negative integers. You must use positive integer values for array index.

*Argument to character-handling function:* By similar reasoning, you cannot use sign-extended plain `char` variables as arguments to character-handling functions declared in `ctype.h`, for instance, `isalpha()` or `isdigit()`. According to the C11 standard (Section 7.4), if you supply an integer argument that cannot be represented as unsigned `char` or EOF, the resulting behavior is undefined.

### Fix

Before conversion to a wider integer data type, cast the signed or plain `char` value explicitly to `unsigned char`.

## Examples

### Sign-Extended Character Value Compared with EOF

```
#include <stdio.h>
#include <stdlib.h>
#define fatal_error() abort()

extern char parsed_token_buffer[20];

static int parser(char *buf)
{
    int c = EOF;
    if (buf && *buf) {
        c = *buf++;
    }
    return c;
}

void func()
{
    if (parser(parsed_token_buffer) == EOF) {
        /* Handle error */
        fatal_error();
    }
}
```

In this example, the function `parser` can traverse a string input `buf`. If a character in the string has the decimal form 255, when converted to the `int` variable `c`, its value becomes -1, which is indistinguishable from `EOF`. The later comparison with `EOF` can lead to a false positive.

One possible correction is to cast the plain `char` value to `unsigned char` before conversion to the wider `int` type.

```
#include <stdio.h>
#include <stdlib.h>
#define fatal_error() abort()

extern char parsed_token_buffer[20];

static int parser(char *buf)
```

```
{
    int c = EOF;
    if (buf && *buf) {
        c = (unsigned char)*buf++;
    }
    return c;
}

void func()
{
    if (parser(parsed_token_buffer) == EOF) {
        /* Handle error */
        fatal_error();
    }
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** CHARACTER\_MISUSE

**Impact:** Medium

**CWE ID:** 704

**CERT C ID:** STR34-C, STR37-C

**CERT C++ ID:** STR34-C, STR37-C

**ISO/IEC TS 17961 ID:** signconv

## See Also

### Polyspace Results

Character value absorbed into EOF | Errno not checked | Invalid use of standard library integer routine | Returned value of a sensitive function not checked

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Modification of internal buffer returned from nonreentrant standard function

Function attempts to modify internal buffer returned from a nonreentrant standard function

### Description

**Modification of internal buffer returned from nonreentrant standard function** occurs when the following happens:

- A nonreentrant standard function returns a pointer.
- You attempt to write to the memory location that the pointer points to.

Nonreentrant standard functions that return a non `const`-qualified pointer to an internal buffer include `getenv`, `getlogin`, `crypt`, `setlocale`, `localeconv`, `strerror` and others.

### Risk

Modifying the internal buffer that a nonreentrant standard function returns can cause the following issues:

- It is possible that the modification does not succeed or alters other internal data.

For instance, `getenv` returns a pointer to an environment variable value. If you modify this value, you alter the environment of the process and corrupt other internal data.

- Even if the modification succeeds, it is possible that a subsequent call to the same standard function does not return your modified value.

For instance, you modify the environment variable value that `getenv` returns. If another process, thread, or signal handler calls `setenv`, the modified value is overwritten. Therefore, a subsequent call to `getenv` does not return your modified value.

## Fix

Avoid modifying the internal buffer using the pointer returned from the function.

## Examples

### Modification of getenv Return Value

```
#include <stdlib.h>
#include <string.h>

void printstr(const char*);

void func() {
    char* env = getenv("LANGUAGE");
    if (env != NULL) {
        strncpy(env, "C", 1);
        printstr(env);
    }
}
```

In this example, the first argument of `strncpy` is the return value from a nonreentrant standard function `getenv`. The behavior can be undefined because `strncpy` modifies this argument.

One possible solution is to copy the return value of `getenv` and pass the copy to the `strncpy` function.

```
#include <stdlib.h>
#include <string.h>
enum {
    SIZE20 = 20
};

void printstr(const char*);

void func() {
    char* env = getenv("LANGUAGE");
    if (env != NULL) {
        char env_cp[SIZE20];
```

```
        strncpy(env_cp, env, SIZE20);
        strncpy(env_cp, "C", 1);
        printstr(env_cp);
    }
}
```

### Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** WRITE\_INTERNAL\_BUFFER\_RETURNED\_FROM\_STD\_FUNC

**Impact:** Low

**CWE ID:** 573, 628

**CERT C ID:** ENV30-C, STR06-C

**CERT C++ ID:** ENV30-C

**ISO/IEC TS 17961 ID:** libmod

### See Also

Find defects (-checkers)

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Non-initialized pointer

Pointer not initialized before dereference

## Description

**Non-initialized pointer** occurs when a pointer is not assigned an address before dereference.

## Examples

### Non-initialized pointer error

```
#include <stdlib.h>

int* assign_pointer(int* prev)
{
    int j = 42;
    int* pi;

    if (prev == NULL)
    {
        pi = (int*)malloc(sizeof(int));
        if (pi == NULL) return NULL;
    }

    *pi = j;
    /* Defect: Writing to uninitialized pointer */

    return pi;
}
```

If `prev` is not `NULL`, the pointer `pi` is not assigned an address. However, `pi` is dereferenced on every execution paths, irrespective of whether `prev` is `NULL` or not.

One possible correction is to assign an address to `pi` when `prev` is not `NULL`.

```
#include <stdlib.h>

int* assign_pointer(int* prev)
{
    int j = 42;
    int* pi;

    if (prev == NULL)
    {
        pi = (int*)malloc(sizeof(int));
        if (pi == NULL) return NULL;
    }
    /* Fix: Initialize pi in branches of if statement */
    else
        pi = prev;

    *pi = j;

    return pi;
}
```

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** NON\_INIT\_PTR

**Impact:** High

**CWE ID:** 456, 457, 824, 908

**CERT C ID:** EXP33-C, MSC15-C

**CERT C++ ID:** EXP53-CPP, EXP54-CPP

**ISO/IEC TS 17961 ID:** uninitref

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Non-initialized variable

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Non-initialized variable

Variable not initialized before use

### Description

**Non-initialized variable** occurs when a variable is not initialized before its value is read.

### Examples

#### Non-initialized variable error

```
int get_sensor_value(void)
{
    extern int getsensor(void);
    int command;
    int val;

    command = getsensor();
    if (command == 2)
    {
        val = getsensor();
    }

    return val;
    /* Defect: val does not have a value if command is not 2 */
}
```

If `command` is not 2, the variable `val` is unassigned. In this case, the return value of function `get_sensor_value` is undetermined.

One possible correction is to initialize `val` during declaration so that the initialization is not bypassed on some execution paths.

```
int get_sensor_value(void)
{
    extern int getsensor(void);
```

```
int command;
/* Fix: Initialize val */
int val=0;

command = getsensor();
if (command == 2)
{
    val = getsensor();
}

return val;
}
```

`val` is assigned an initial value of 0. When `command` is not equal to 2, the function `get_sensor_value` returns this value.

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** NON\_INIT\_VAR

**Impact:** High

**CWE ID:** 456, 457, 908

**CERT C ID:** EXP33-C, MSC15-C, MSC39-C

**CERT C++ ID:** EXP53-CPP, EXP54-CPP, MSC39-C

**ISO/IEC TS 17961 ID:** uninitref

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Non-initialized pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Nonsecure hash algorithm

Context used for message digest creation is associated with weak algorithm

## Description

**Nonsecure hash algorithm** occurs when you use a cryptographic hash function that is proven to be weak against certain forms of attack.

The hash functions flagged by this checker include SHA-0, SHA-1, MD4, MD5, and RIPEMD-160. The checker detects the use of these hash functions in:

- Functions from the EVP API such as `EVP_DigestUpdate` or `EVP_SignUpdate`.
- Functions from the low level API such as `SHA1_Update` or `MD5_Update`.

## Risk

You use a hash function to create a message digest from input data and thereby ensure integrity of your data. The hash functions flagged by this checker use algorithms with known weaknesses that an attacker can exploit. The attacks can comprise the integrity of your data.

## Fix

Use a more secure hash function. For instance, use the later SHA functions such as SHA-224, SHA-256, SHA-384, and SHA-512.

## Examples

### Use of MD5 Algorithm

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)
```

```
int ret;
unsigned char *out_buf;
unsigned int out_len;

void func(unsigned char *src, size_t len, EVP_PKEY* pkey){
    EVP_MD_CTX* ctx = EVP_MD_CTX_create();

    ret = EVP_SignInit_ex(ctx, EVP_md5(), NULL);
    if (ret != 1) fatal_error();

    ret = EVP_DigestUpdate(ctx,src,len);

    if (ret != 1) fatal_error();

    ret = EVP_SignFinal(ctx, out_buf, &out_len, pkey);
    if (ret != 1) fatal_error();
}
```

In this example, during initialization with `EVP_SignInit_ex`, the context object is associated with the weak hash function MD5. The checker flags the usage of this context in the update step with `EVP_DigestUpdate`.

One possible correction is to use a hash function from the SHA-2 family, such as SHA-256.

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;
unsigned int out_len;

void func(unsigned char *src, size_t len, EVP_PKEY* pkey){
    EVP_MD_CTX* ctx = EVP_MD_CTX_create();

    ret = EVP_SignInit_ex(ctx, EVP_sha256(), NULL);
    if (ret != 1) fatal_error();

    ret = EVP_SignUpdate(ctx, src, len);
    if (ret != 1) fatal_error();

    ret = EVP_SignFinal(ctx, out_buf, &out_len, pkey);
```

```
    if (ret != 1) fatal_error();  
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_MD\_WEAK\_HASH

**Impact:** Medium

**CWE ID:** 310, 327, 328, 353, 522

## See Also

Context initialized incorrectly for digest operation

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Nonsecure parameters for key generation

Context used for key generation is associated with weak parameters

### Description

**Nonsecure parameters for key generation** occurs when you attempt key generation by using an `EVP_PKEY_CTX` context object that is associated with weak parameters. What constitutes a weak parameter depends on the public key algorithm used. In the DSA algorithm, a weak parameter can be the result of setting an insufficient parameter length.

For instance, you set the number of bits used for DSA parameter generation to 512 bits, and then use the parameters for key generation:

```
EVP_PKEY_CTX *pctx,*kctx;
EVP_PKEY *params, *pkey;

/* Initializations for parameter generation */
pctx = EVP_PKEY_CTX_new_id(EVP_PKEY_DSA, NULL);
params = EVP_PKEY_new();

/* Parameter generation */
ret = EVP_PKEY_paramgen_init(pctx);
ret = EVP_PKEY_CTX_set_dsa_paramgen_bits(pctx, KEYLEN_512BITS);
ret = EVP_PKEY_paramgen(pctx, &params);

/* Initializations for key generation */
kctx = EVP_PKEY_CTX_new(params, NULL);
pkey = EVP_PKEY_new();

/* Key generation */
ret = EVP_PKEY_keygen_init(kctx);
ret = EVP_PKEY_keygen(kctx, &pkey);
```

### Risk

Weak parameters lead to keys that are not sufficiently strong for encryption and expose sensitive information to known ways of attack.

## Fix

Depending on the algorithm, use these parameters:

- Diffie-Hellman (DH): Set the length of the DH prime parameter to 2048 bits.  

```
ret = EVP_PKEY_CTX_set_dh_paramgen_prime_len(pctx, 2048);
```

Set the DH generator to 2 or 5.  

```
ret = EVP_PKEY_CTX_set_dh_paramgen_generator(pctx, 2);
```
- Digital Signature Algorithm (DSA): Set the number of bits used for DSA parameter generation to 2048 bits.  

```
ret = EVP_PKEY_CTX_set_dsa_paramgen_bits(pctx, 2048);
```
- RSA: Set the RSA key length to 2048 bits.  

```
ret = EVP_PKEY_CTX_set_rsa_keygen_bits(kctx, 2048);
```
- Elliptic curve (EC): Avoid using curves that are known to be broken, for instance, X9\_62\_prime256v1. Use, for instance, sect239k1.  

```
ret = EVP_PKEY_CTX_set_ec_paramgen_curve_nid(pctx, NID_sect239k1);
```

## Examples

### Insufficient Bits for RSA Key Generation

```
#include <stddef.h>
#include <openssl/rsa.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
int func(EVP_PKEY *pkey){
    EVP_PKEY_CTX * ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_keygen_init(ctx);
    if (ret <= 0) fatal_error();
```

```
    ret = EVP_PKEY_CTX_set_rsa_keygen_bits(ctx, 512);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_keygen(ctx, &pkey);
}
```

In this example, the RSA key generation uses 512 bits, which makes the generated key vulnerable to attacks.

Use 2048 bits for RSA key generation.

```
#include <stddef.h>
#include <openssl/rsa.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
int func(EVP_PKEY *pkey){
    EVP_PKEY_CTX * ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_keygen_init(ctx);
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_CTX_set_rsa_keygen_bits(ctx, 2048);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_keygen(ctx, &pkey);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_PKEY\_WEAK\_PARAMS

**Impact:** Medium

**CWE ID:** 310, 326, 327, 522

## See Also

Context initialized incorrectly for cryptographic operation |  
Incorrect key for cryptographic algorithm | Missing parameters for key

generation|Missing data for encryption, decryption or signing|  
Missing peer key|Missing private key|Missing public key

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## **External Websites**

<https://safecurves.cr.yp.to/>

<https://csrc.nist.gov/publications/detail/fips/186/4/final>

**Introduced in R2018a**

## Nonsecure RSA public exponent

Context used in key generation is associated with low exponent value

### Description

**Nonsecure RSA public exponent** occurs when you attempt RSA key generation by using a context object that is associated with a low public exponent.

For instance, you set a public exponent of 3 in the context object, and then use it for key generation.

```
/* Set public exponent */
ret = BN_dec2bn(&pubexp, "3");

/* Initialize context */
ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
pkey = EVP_PKEY_new();
ret = EVP_PKEY_keygen_init(kctx);

/* Set public exponent in context */
ret = EVP_PKEY_CTX_set_rsa_keygen_pubexp(ctx, pubexp);

/* Generate key */
ret = EVP_PKEY_keygen(kctx, &pkey);
```

### Risk

A low RSA public exponent makes certain kinds of attacks more damaging, especially when a weak padding scheme is used or padding is not used at all.

### Fix

It is recommended to use a public exponent of 65537. Using a higher public exponent can make the operations slower.

## Examples

### Using RSA Public Exponent of 3

```
#include <stddef.h>
#include <openssl/rsa.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
int func(EVP_PKEY *pkey){
    BIGNUM* pubexp;
    EVP_PKEY_CTX* ctx;

    pubexp = BN_new();
    if (pubexp == NULL) fatal_error();
    ret = BN_set_word(pubexp, 3);
    if (ret <= 0) fatal_error();

    ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_keygen_init(ctx);
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_CTX_set_rsa_keygen_bits(ctx, 2048);
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_CTX_set_rsa_keygen_pubexp(ctx, pubexp);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_keygen(ctx, &pkey);
}
```

In this example, an RSA public exponent of 3 is associated with the context object `ctx`. The low exponent makes operations that use the generated key vulnerable to certain attacks.

One possible correction is to use the recommended public exponent 65537.

```
#include <stddef.h>
#include <openssl/rsa.h>
```

```
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
int func(EVP_PKEY *pkey){
    BIGNUM* pubexp;
    EVP_PKEY_CTX* ctx;

    pubexp = BN_new();
    if (pubexp == NULL) fatal_error();
    ret = BN_set_word(pubexp, 65537);
    if (ret <= 0) fatal_error();

    ctx = EVP_PKEY_CTX_new_id(EVP_PKEY_RSA, NULL);
    if (ctx == NULL) fatal_error();

    ret = EVP_PKEY_keygen_init(ctx);
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_CTX_set_rsa_keygen_bits(ctx, 2048);
    if (ret <= 0) fatal_error();
    ret = EVP_PKEY_CTX_set_rsa_keygen_pubexp(ctx, pubexp);
    if (ret <= 0) fatal_error();
    return EVP_PKEY_keygen(ctx, &pkey);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_RSA\_LOW\_EXPONENT

**Impact:** Medium

**CWE ID:** 310, 326, 327, 522

## See Also

Incompatible padding for RSA algorithm operation|Missing blinding for RSA algorithm|Missing padding for RSA algorithm|Weak padding for RSA algorithm

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Nonsecure SSL/TLS protocol

Context used for handling SSL/TLS connections is associated with weak protocol

### Description

**Nonsecure SSL/TLS protocol** occurs when you do not disable nonsecure protocols in an `SSL_CTX` or `SSL` context object before using the object for handling SSL/TLS connections.

For instance, you disable the protocols `SSL2.0` and `TLS1.0` but forget to disable the protocol `SSL3.0`, which is also considered weak.

```
/* Create and configure context */
ctx = SSL_CTX_new(SSLv23_method());
SSL_CTX_set_options(ctx, SSL_OP_NO_SSLv2|SSL_OP_NO_TLSv1);

/* Use context to handle connection */
ssl = SSL_new(ctx);
SSL_set_fd(ssl, NULL);
ret = SSL_connect(ssl);
```

### Risk

The protocols `SSL2.0`, `SSL3.0`, and `TLS1.0` are considered weak in the cryptographic community. Using one of these protocols can expose your connections to cross-protocol attacks. The attacker can decrypt an RSA ciphertext without knowing the RSA private key.

### Fix

Disable the nonsecure protocols in the context object before using the object to handle connections.

```
/* Create and configure context */
ctx = SSL_CTX_new(SSLv23_method());
SSL_CTX_set_options(ctx, SSL_OP_NO_SSLv2|SSL_OP_NO_SSLv3|SSL_OP_NO_TLSv1);
```

## Examples

### Nonsecure Protocols Not Disabled

```
#include <stdlib.h>
#include <stdio.h>
#include <unistd.h>
#include <sys/socket.h>
#include <arpa/inet.h>
#include <openssl/ssl.h>
#include <openssl/err.h>

#define fatal_error() exit(-1)

int ret;
int func(){
    SSL_CTX *ctx;
    SSL *ssl;

    SSL_library_init();

    /* context configuration */
    ctx = SSL_CTX_new(SSLv23_client_method());
    if (ctx==NULL) fatal_error();

    ret = SSL_CTX_use_certificate_file(ctx, "cert.pem", SSL_FILETYPE_PEM);
    if (ret <= 0) fatal_error();

    ret = SSL_CTX_load_verify_locations(ctx, NULL, "ca/path");
    if (ret <= 0) fatal_error();

    /* Handle connection */
    ssl = SSL_new(ctx);
    if (ssl==NULL) fatal_error();
    SSL_set_fd(ssl, NULL);

    return SSL_connect(ssl);
}
```

In this example, the protocols SSL2.0, SSL3.0, and TLS1.0 are not disabled in the context object before the object is used for a new connection.

Disable nonsecure protocols before using the objects for a new connection. Use the function `SSL_CTX_set_options` to disable the protocols SSL2.0, SSL3.0, and TLS1.0.

```
#include <stdlib.h>
#include <stdio.h>
#include <unistd.h>
#include <sys/socket.h>
#include <arpa/inet.h>
#include <openssl/ssl.h>
#include <openssl/err.h>

#define fatal_error() exit(-1)

int ret;
int func(){
    SSL_CTX *ctx;
    SSL *ssl;

    SSL_library_init();

    /* context configuration */
    ctx = SSL_CTX_new(SSLv23_client_method());
    if (ctx==NULL) fatal_error();

    SSL_CTX_set_options(ctx, SSL_OP_NO_SSLv2|SSL_OP_NO_SSLv3|SSL_OP_NO_TLSv1);

    ret = SSL_CTX_use_certificate_file(ctx, "cert.pem", SSL_FILETYPE_PEM);
    if (ret <= 0) fatal_error();

    ret = SSL_CTX_load_verify_locations(ctx, NULL, "ca/path");
    if (ret <= 0) fatal_error();

    /* Handle connection */
    ssl = SSL_new(ctx);
    if (ssl==NULL) fatal_error();
    SSL_set_fd(ssl, NULL);

    return SSL_connect(ssl);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_SSL\_WEAK\_PROTOCOL

**Impact:** Medium

**CWE ID:** 310, 327, 522, 693

## See Also

### Topics

[“Interpret Polyspace Bug Finder Results”](#)

[“Address Polyspace Results Through Bug Fixes or Comments”](#)

**Introduced in R2018a**

## Null pointer

NULL pointer dereferenced

### Description

**Null pointer** occurs when you use a pointer with a value of NULL as if it points to a valid memory location.

### Examples

#### Null pointer error

```
#include <stdlib.h>

int FindMax(int *arr, int Size)
{
    int* p=NULL;

    *p=arr[0];
    /* Defect: Null pointer dereference */

    for(int i=0;i<Size;i++)
    {
        if(arr[i] > (*p))
            *p=arr[i];
    }

    return *p;
}
```

The pointer `p` is initialized with value of NULL. However, when the value `arr[0]` is written to `*p`, `p` is assumed to point to a valid memory location.

One possible correction is to initialize `p` with a valid memory address before dereference.

```
#include <stdlib.h>
```

```
int FindMax(int *arr, int Size)
{
  /* Fix: Assign address to null pointer */
  int* p=&arr[0];

  for(int i=0;i<Size;i++)
  {
    if(arr[i] > (*p))
      *p=arr[i];
  }

  return *p;
}
```

## Check Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** NULL\_PTR

**Impact:** High

**CWE ID:** 476, 690

**CERT C ID:** EXP34-C, MSC15-C

**CERT C++ ID:** EXP34-C

**ISO/IEC TS 17961 ID:** nullref

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Arithmetic operation with NULL pointer | Non-initialized pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Object slicing

Derived class object passed by value to function with base class parameter

## Description

**Object slicing** occurs when you pass a derived class object by value to a function, but the function expects a base class object as parameter.

## Risk

If you pass a derived class object *by value* to a function, you expect the derived class copy constructor to be called. If the function expects a base class object as parameter:

- 1 The base class copy constructor is called.
- 2 In the function body, the parameter is considered as a base class object.

In C++, `virtual` methods of a class are resolved at run time according to the actual type of the object. Because of object slicing, an incorrect implementation of a `virtual` method can be called. For instance, the base class contains a `virtual` method and the derived class contains an implementation of that method. When you call the `virtual` method from the function body, the base class method is called, even though you pass a derived class object to the function.

## Fix

One possible fix is to pass the object by reference or pointer. Passing by reference or pointer does not cause invocation of copy constructors. If you do not want the object to be modified, use a `const` qualifier with your function parameter.

Another possible fix is to overload the function with another function that accepts the derived class object as parameter.

## Examples

### Function Call Causing Object Slicing

```
#include <iostream>

class Base {
public:
    explicit Base(int b) {
        _b = b;
    }
    virtual ~Base() {}
    virtual int update() const;
protected:
    int _b;
};

class Derived: public Base {
public:
    explicit Derived(int b):Base(b) {}
    int update() const;
};

//Class methods definition

int Base::update() const {
    return (_b + 1);
}

int Derived::update() const {
    return (_b -1);
}

//Other function definitions
void funcPassByValue(const Base bObj) {
    std::cout << "Updated _b=" << bObj.update() << std::endl;
}

int main() {
    Derived dObj(0);
    funcPassByValue(dObj);           //Function call slices object
```

```

    return 0;
}

```

In this example, the call `funcPassByValue(dObj)` results in the output `Updated _b=1` instead of the expected `Updated _b=-1`. Because `funcPassByValue` expects a `Base` object parameter, it calls the `Base` class copy constructor.

Therefore, even though you pass the `Derived` object `dObj`, the function `funcPassByValue` treats its parameter `b` as a `Base` object. It calls `Base::update()` instead of `Derived::update()`.

One possible correction is to pass the `Derived` object `dObj` by reference or by pointer. In the following, corrected example, `funcPassByReference` and `funcPassByPointer` have the same objective as `funcPassByValue` in the preceding example. However, `funcPassByReference` expects a reference to a `Base` object and `funcPassByPointer` expects a pointer to a `Base` object.

Passing the `Derived` object `d` by a pointer or by reference does not slice the object. The calls `funcPassByReference(dObj)` and `funcPassByPointer(&dObj)` produce the expected result `Updated _b=-1`.

```

#include <iostream>

class Base {
public:
    explicit Base(int b) {
        _b = b;
    }
    virtual ~Base() {}
    virtual int update() const;
protected:
    int _b;
};

class Derived: public Base {
public:
    explicit Derived(int b):Base(b) {}
    int update() const;
};

//Class methods definition

```

```
int Base::update() const {
    return (_b + 1);
}

int Derived::update() const {
    return (_b -1);
}

//Other function definitions
void funcPassByReference(const Base& bRef) {
    std::cout << "Updated _b=" << bRef.update() << std::endl;
}

void funcPassByPointer(const Base* bPtr) {
    std::cout << "Updated _b=" << bPtr->update() << std::endl;
}

int main() {
    Derived dObj(0);
    funcPassByReference(dObj);           //Function call does not slice object
    funcPassByPointer(&dObj);          //Function call does not slice object
    return 0;
}
```

---

**Note** If you pass by value, because a copy of the object is made, the original object is not modified. Passing by reference or by pointer makes the object vulnerable to modification. If you are concerned about your original object being modified, add a `const` qualifier to your function parameter, as in the preceding example.

---

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** On

**Command-Line Syntax:** OBJECT\_SLICING

**Impact:** High

**CERT C++ ID:** OOP51-CPP

## **See Also**

Find defects (-checkers)

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Opening previously opened resource

Opening an already opened file

### Description

**Opening previously opened resource** checks for file opening functions that are opening an already opened file.

### Risk

If you open a resource multiple times, you can encounter:

- A race condition when accessing the file.
- Undefined or unexpected behavior for that file.
- Portability issues when you run your program on different targets.

### Fix

Once a resource is open, close the resource before reopening.

## Examples

### File Reopened With New Permissions

```
#include <stdio.h>
const char* logfile = "my_file.log";

void doubleresourceopen()
{
    FILE* fpa = fopen(logfile, "w");
    if (fpa == NULL) {
        return;
    }
    (void)fprintf(fpa, "Writing");
}
```

```
    FILE* fpb = fopen(logfile, "r");
    (void)fclose(fpa);
    (void)fclose(fpb);
}
```

In this example, a `logfile` is opened in the first line of this function with write privileges. Halfway through the function, the `logfile` is opened again with read privileges.

One possible correction is to close the file before reopening the file with different privileges.

```
#include <stdio.h>
const char* logfile = "my_file.log";

void doubleresourceopen()
{
    FILE* fpa = fopen(logfile, "w");
    if (fpa == NULL) {
        return;
    }
    (void)fprintf(fpa, "Writing");
    (void)fclose(fpa);
    FILE* fpb = fopen(logfile, "r");
    (void)fclose(fpb);
}
```

## Result Information

**Group:** Resource management

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `DOUBLE_RESOURCE_OPEN`

**Impact:** Medium

**CWE ID:** 362, 413, 675

**CERT C ID:** FIO24-C

**CERT C++ ID:**

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

# Overlapping assignment

Memory overlap between left and right sides of an assignment

## Description

**Overlapping assignment** occurs when there is a memory overlap between the left and right sides of an assignment. For instance, a variable is assigned to itself or one member of a union is assigned to another.

## Risk

If the left and right sides of an assignment have memory overlap, the behavior is either redundant or undefined. For instance:

- Self-assignment such as `x=(int)(long)x;` is redundant unless `x` is `volatile`-qualified.
- Assignment of one union member to another causes undefined behavior.

For instance, in the following code:

- The result of the assignment `u1.a = u1.b` is undefined because `u1.b` is not initialized.
- The result of the assignment `u2.b = u2.a` depends on the alignment and endianness of the implementation. It is not defined by C standards.

```
union {
    char a;
    int b;
}u1={'a'}, u2={'a'}; // 'u1.a' and 'u2.a' are initialized

u1.a = u1.b;
u2.b = u2.a;
```

## Fix

Avoid assignment between two variables that have overlapping memory.

## Examples

### Assignment of Union Members

```
#include <string.h>

union Data {
    int i;
    float f;
};

int main( ) {
    union Data data;
    data.i = 0;
    data.f = data.i;

    return 0;
}
```

In this example, the variables `data.i` and `data.f` are part of the same union and are stored in the same location. Therefore, part of their memory storage overlaps.

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** OVERLAPPING\_ASSIGN

**Impact:** Low

**CWE ID:** 665

**CERT C ID:** MSC15-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Copy of overlapping memory

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Partial override of overloaded virtual functions

Class overrides fraction of inherited virtual functions with a given name

### Description

**Partial override of overloaded virtual functions** occurs when:

- A base class has multiple `virtual` methods with the same name but different signatures (overloading).
- A class derived from the base class overrides at least one of those `virtual` methods, but not all of them.

### Risk

The `virtual` methods that the derived class does not override are hidden. You cannot call those methods using an object of the derived class.

### Fix

See if the overloads in the base class are required. If they are needed, possible solutions include:

- In your derived class, if you override one `virtual` method, override all `virtual` methods from the base class with the same name as that method.
- Otherwise, add the line using `Base_class_name::method_name` to the derived class declaration. In this way, you can call the base class methods using an object of the derived class.

## Examples

### Partial Override

```
class Base {
public:
    explicit Base(int b);
    virtual ~Base() {};
    virtual void set()          {
        _b = (int)0;
    };
    virtual void set(short i)   {
        _b = (int)i;
    };
    virtual void set(int i)     {
        _b = (int)i;
    };
    virtual void set(long i)    {
        _b = (int)i;
    };
    virtual void set(float i)   {
        _b = (int)i;
    };
    virtual void set(double i)  {
        _b = (int)i;
    };
private:
    int _b;
};

class Derived: public Base {
public:
    Derived(int b, int d): Base(b), _d(d) {};
    void set(int i)      { Base::set(i); _d = (int)i; };
private:
    int _d;
};
```

In this example, the class `Derived` overrides the function `set` that takes an `int` argument. It does not override other functions that have the same name `set` but take arguments of other types.

The defect appears on the derived class name in the derived class definition. To find which base class method is overridden:

- 1 Navigate to the base class definition. On the **Source** pane, right-click the base class name and select **Go To Definition**.
- 2 In the base class definition, identify the method that has the same name and signature as a derived class method name.

One possible correction is add the line using `Base::set` to the `Derived` class declaration.

```
class Base {
public:
    explicit Base(int b);
    virtual ~Base() {};
    virtual void set()          {
        _b = (int)0;
    };
    virtual void set(short i)   {
        _b = (int)i;
    };
    virtual void set(int i)     {
        _b = (int)i;
    };
    virtual void set(long i)    {
        _b = (int)i;
    };
    virtual void set(float i)   {
        _b = (int)i;
    };
    virtual void set(double i)  {
        _b = (int)i;
    };
private:
    int _b;
};

class Derived: public Base {
public:
    Derived(int b, int d): Base(b), _d(d) {};
    using Base::set;
    void set(int i)    { Base::set(i); _d = (int)i; };
private:
```

```
};           int _d;
```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** On

**Command-Line Syntax:** PARTIAL\_OVERRIDE

**Impact:** Medium

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Partially accessed array

Array partly read or written before end of scope

### Description

**Partially accessed array** occurs when an array is partially read or written before the end of array scope. For arrays local to a function, the end of scope occurs when the function ends.

### Examples

#### Partially accessed array error

```
int Calc_Sum(void)
{
    int tab[5]={0,1,2,3,4},sum=0;
    /* Defect: tab[4] is not read */

    for (int i=0; i<4;i++) sum+=tab[i];

    return(sum);
}
```

The array `tab` is only partially read before end of function `Calc_Sum`. While calculating sum, `tab[4]` is not included.

One possible correction is to read every element in the array `tab`.

```
int Calc_Sum(void)
{
    int tab[5]={0,1,2,3,4},sum=0;

    /* Fix: Include tab[4] in calculating sum */
```

```
    for (int i=0; i<5;i++) sum+=tab[i];  
    return(sum);  
}
```

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On for handwritten code, off for generated code

**Command-Line Syntax:** PARTIALLY\_ACCESSED\_ARRAY

**Impact:** Low

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Pointer access out of bounds

Pointer dereferenced outside its bounds

### Description

**Pointer access out of bounds** occurs when a pointer is dereferenced outside its bounds.

When a pointer is assigned an address, a block of memory is associated with the pointer. You cannot access memory beyond that block using the pointer.

### Examples

#### Pointer access out of bounds error

```
int* Initialize(void)
{
    int arr[10];
    int *ptr=arr;

    for (int i=0; i<=9;i++)
    {
        ptr++;
        *ptr=i;
        /* Defect: ptr out of bounds for i=9 */
    }

    return(arr);
}
```

`ptr` is assigned the address `arr` that points to a memory block of size `10*sizeof(int)`. In the `for`-loop, `ptr` is incremented 10 times. In the last iteration of the loop, `ptr` points outside the memory block assigned to it. Therefore, it cannot be dereferenced.

One possible correction is to reverse the order of increment and dereference of `ptr`.

```
int* Initialize(void)
{
```

```
int arr[10];
int *ptr=arr;

for (int i=0; i<=9;i++)
{
    /* Fix: Dereference pointer before increment */
    *ptr=i;
    ptr++;
}

return(arr);
}
```

After the last increment, even though `ptr` points outside the memory block assigned to it, it is not dereferenced more.

## Check Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** OUT\_BOUND\_PTR

**Impact:** High

**CWE ID:** 119, 131, 188, 466, 823

**CERT C ID:** API02-C, ARR30-C, ARR38-C, ARR39-C, EXP08-C, EXP39-C, FIO37-C, MEM35-C, MSC15-C, STR31-C

**CERT C++ ID:** ARR30-C, ARR38-C, ARR39-C, CTR50-CPP, EXP39-C, FIO37-C, MEM35-C, MEM50-CPP, MEM52-CPP, STR31-C, STR50-CPP, STR53-CPP

**ISO/IEC TS 17961 ID:** ptrcomp, insufmem, invptr, taintformatio

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Array access out of bounds

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Pointer dereference with tainted offset

Offset is from an unsecure source and dereference may be out of bounds

## Description

**Pointer dereference with tainted offset** detects pointer dereferencing, either reading or writing, using an offset variable from an unknown or unsecure source.

This check focuses on dynamically allocated buffers. For static buffer offsets, see `Array access with tainted index`.

## Risk

The index might be outside the valid array range. If the tainted index is outside the array range, it can cause:

- Buffer underflow/underwrite, or writing to memory before the beginning of the buffer.
- Buffer overflow, or writing to memory after the end of a buffer.
- Over reading a buffer, or accessing memory after the end of the targeted buffer.
- Under-reading a buffer, or accessing memory before the beginning of the targeted buffer.

An attacker can use an invalid read or write to compromise your program.

## Fix

Validate the index before you use the variable to access the pointer. Check to make sure that the variable is inside the valid range and does not overflow.

## Examples

### Dereference Pointer Array

```
#include <stdlib.h>
```

```
enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};
extern void read_pint(int*);

int taintedptroffset(int i) {
    int* pint = (int*)calloc(SIZE10, sizeof(int));
    int c = 0;
    if(pint) {
        /* Filling array */
        read_pint(pint);
        c = pint[i];
        free(pint);
    }
    return c;
}
```

In this example, the function initializes an integer pointer `pint`. The pointer is dereferenced using the input index `i`. The value of `i` could be outside the pointer range, causing an out-of-range error.

One possible correction is to validate the value of the index. If the index is inside the valid range, continue with the pointer dereferencing.

```
#include <stdlib.h>

enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};
extern void read_pint(int*);

int taintedptroffset(int i) {
    int* pint = (int*)calloc(SIZE10, sizeof(int));
    int c = 0;
    if (pint) {
        /* Filling array */
        read_pint(pint);
        if (i>0 && i<SIZE10) {
            c = pint[i];
        }
    }
}
```

```
        free(pint);  
    }  
    return c;  
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_PTR\_OFFSET

**Impact:** Low

**CWE ID:** 122, 124, 129, 823

**CERT C ID:** API00-C, API02-C, ARR30-C

**CERT C++ ID:** ARR30-C, CTR50-CPP, STR53-CPP

**ISO/IEC TS 17961 ID:** invptr

## See Also

Array access with tainted index | Use of tainted pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Pointer or reference to stack variable leaving scope

Pointer to local variable leaves the variable scope

### Description

**Pointer or reference to stack variable leaving scope** occurs when a pointer or reference to a local variable leaves the scope of the variable. For instance:

- A function returns a pointer to a local variable.
- A function performs the assignment `globPtr = &locVar`. `globPtr` is a global pointer variable and `locVar` is a local variable.
- A function performs the assignment `*paramPtr = &locVar`. `paramPtr` is a function parameter that is, for instance, an `int**` pointer and `locVar` is a local `int` variable.
- A C++ method performs the assignment `memPtr = &locVar`. `memPtr` is a pointer data member of the class the method belongs to. `locVar` is a variable local to the method.

The defect also applies to memory allocated using the `alloca` function. The defect does not apply to static, local variables.

### Risk

Local variables are allocated an address on the stack. Once the scope of a local variable ends, this address is available for reuse. Using this address to access the local variable value outside the variable scope can cause unexpected behavior.

If a pointer to a local variable leaves the scope of the variable, Polyspace Bug Finder highlights the defect. The defect appears even if you do not use the address stored in the pointer. For maintainable code, it is a good practice to not allow the pointer to leave the variable scope. Even if you do not use the address in the pointer now, someone else using your function can use the address, causing undefined behavior.

## Fix

Do not allow a pointer or reference to a local variable to leave the variable scope.

## Examples

### Pointer to Local Variable Returned from Function

```
void func2(int *ptr) {
    *ptr = 0;
}

int* func1(void) {
    int ret = 0;
    return &ret ;
}

void main(void) {
    int* ptr = func1() ;
    func2(ptr) ;
}
```

In this example, `func1` returns a pointer to local variable `ret`.

In `main`, `ptr` points to the address of the local variable. When `ptr` is accessed in `func2`, the access is illegal because the scope of `ret` is limited to `func1`,

## Result Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** LOCAL\_ADDR\_ESCAPE

**Impact:** High

**CWE ID:** 562, 825

**CERT C ID:** DCL30-C

**CERT C++ ID:** DCL30-C, EXP54-CPP

**ISO/IEC TS 17961 ID:** adrescape

## **See Also**

Find defects (-checkers)

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Pointer to non-initialized value converted to const pointer

Pointer to constant assigned address that does not contain a value

## Description

**Pointer to non initialized value converted to const pointer** occurs when a pointer to a constant is assigned an address that does not yet contain a value.

## Examples

### Pointer to non initialized value converted to const pointer error

```
#include<stdio.h>

void Display_Parity()
{
    int num,parity;
    const int* num_ptr = &num;
    /* Defect: Address &num does not store a value */

    printf("Enter a number\n:");
    scanf("%d",&num);

    parity=((*num_ptr)%2);
    if(parity==0)
        printf("The number is even.");
    else
        printf("The number is odd.");
}
```

`num_ptr` is declared as a pointer to a constant. However the variable `num` does not contain a value when `num_ptr` is assigned the address `&num`.

One possible correction is to obtain the value of `num` from the user before `&num` is assigned to `num_ptr`.

```
#include<stdio.h>

void Display_Parity()
{
    int num,parity;
    const int* num_ptr;

    printf("Enter a number\n:");
    scanf("%d",&num);

    /* Fix: Assign &num to pointer after it receives a value */
    num_ptr=&num;
    parity=(*num_ptr)%2;
    if(parity==0)
        printf("The number is even.");
    else
        printf("The number is odd.");
}
```

The `scanf` statement stores a value in `&num`. Once the value is stored, it is legitimate to assign `&num` to `num_ptr`.

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** NON\_INIT\_PTR\_CONV

**Impact:** Medium

**ISO/IEC TS 17961 ID:** `uninitref`

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Possible invalid operation on boolean operand

Operation can exceed precision of Boolean operand or result in arbitrary value

### Description

**Possible invalid operation on boolean operand** occurs when you use a Boolean operand in an arithmetic, relational, or bitwise operation and:

- The Boolean operand has a trap representation. The size of a Boolean type in memory is at least one addressable unit (size of `char`). A Boolean type requires only one bit to represent the value `true` (1) or `false` (0). The representation of a Boolean operand in memory contains padding bits. The memory representation can result in values that are not `true` or `false`, a trap representation.
- The result of the operation can exceed the precision of the Boolean operand.

For example, in this code snippet:

```
bool_v >> 2
```

- If the value of `bool_v` is `true` (1) or `false` (0), the bitwise shift exceeds the one-bit precision of `bool_v` and always results in 0.
- If `bool_v` has a trap representation, the result of the operation is an arbitrary value.

**Possible invalid operation on boolean operand** raises no defect when:

- The operation does not result in a precision overflow. For instance, bitwise `&` or `|` operations with `0x01` or `0x00`.
- The Boolean operand cannot have a trap representation. For instance, a constant expression that results in 0 or 1, or a comparison evaluated to `true` or `false`.

### Risk

Arithmetic, relational, or bitwise operations on a Boolean operand can exceed the operand precision and cause unexpected results when used as a Boolean value. Operations on Boolean operands with trap representations can return arbitrary values.

## Fix

Avoid performing operations on Boolean operands other than these operations:

- Assignment operation (=).
- Equality operations (== or !=).
- Logical operations (&&, ||, or !).

## Examples

### Possible Trap Representation of Boolean Operand

```
#include <stdio.h>
#include <stdbool.h>

#define B00L _Bool

int arr[2] = {1, 2};

int func(B00L b)
{
    return arr[b];
}

int main(void)
{
    B00L b;
    char* ptr = (char*)&b;
    *ptr = 64;
    return func(b);
}
```

In this example, Boolean operand `b` is used as an array index in `func` for an array with two elements. Depending on the compiler and optimization flags you use, the value `b` might not be `0` or `1`. For instance, in Linux Debian 8, if you use `gcc` version 4.9 with optimization flag `-O0`, the value of `b` is `64`, which causes a buffer overflow.

One possible correction is to use a variable `b0` of type `unsigned int` to get only the value of the last significant bit of the Boolean operand. The value of this bit is in the range `[0..1]`, even if the Boolean operand has a trap representation.

```
#include <stdio.h>
#include <stdbool.h>

#define BOOL _Bool

int arr[2] = {1, 2};

int func(BOOL b)
{
    unsigned int b0 = (unsigned int)b;
    b0 &= 0x1;
    return arr[b0];
}

int main(void)
{
    BOOL b;
    char* ptr = (char*)&b;
    *ptr = 64;
    return func(b);
}
```

## Result Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** INVALID\_OPERATION\_ON\_BOOLEAN

**Impact:** Low

**CWE ID:** 190

**CERT C ID:** INT35-C

**CERT C++ ID:** EXP46-C, INT35-C

## See Also

Bitwise and arithmetic operation on the same data | Bitwise operation on negative value | Integer conversion overflow | Integer overflow | Integer precision exceeded | MISRA C++:2008 Rule 4-5-2 | MISRA C:2004 Rule 12.6 | MISRA C:2012 Rule 10.1 | MISRA C:2012 Rule 12.2 | Shift of a negative value | Shift operation overflow | Unsigned integer conversion overflow | Unsigned integer overflow

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

## Possible misuse of sizeof

Use of `sizeof` operator can cause unintended results

### Description

**Possible misuse of sizeof** occurs when Polyspace Bug Finder detects possibly unintended results from the use of `sizeof` operator. For instance:

- You use the `sizeof` operator on an array parameter name, expecting the array size. However, the array parameter name by itself is a pointer. The `sizeof` operator returns the size of that pointer.
- You use the `sizeof` operator on an array element, expecting the array size. However, the operator returns the size of the array element.
- The size argument of certain functions such as `strncmp` or `wcsncpy` is incorrect because you used the `sizeof` operator earlier with possibly incorrect expectations. For instance:
  - In a function call `strncmp(string1, string2, num)`, `num` is obtained from an incorrect use of the `sizeof` operator on a pointer.
  - In a function call `wcsncpy(destination, source, num)`, `num` is not the number of wide characters but a size in bytes obtained by using the `sizeof` operator. For instance, you use `wcsncpy(destination, source, sizeof(destination) - 1)` instead of `wcsncpy(destination, source, (sizeof(destination)/sizeof(wchar_t)) - 1)`.

### Risk

Incorrect use of the `sizeof` operator can cause the following issues:

- If you expect the `sizeof` operator to return array size and use the return value to constrain a loop, the number of loop runs are smaller than what you expect.
- If you use the return value of `sizeof` operator to allocate a buffer, the buffer size is smaller than what you require. Insufficient buffer can lead to resultant weaknesses such as buffer overflows.

- If you use the return value of `sizeof` operator incorrectly in a function call, the function does not behave as you expect.

## Fix

Possible fixes are:

- Do not use the `sizeof` operator on an array parameter name or array element to determine array size.

The best practice is to pass the array size as a separate function parameter and use that parameter in the function body.

- Use the `sizeof` operator carefully to determine the number argument of functions such as `strncpy` or `wcsncpy`. For instance, for wide string functions such as `wcsncpy`, use the number of wide characters as argument instead of the number of bytes.

## Examples

### **sizeof Used Incorrectly to Determine Array Size**

```
#define MAX_SIZE 1024

void func(int a[MAX_SIZE]) {
    int i;

    for (i = 0; i < sizeof(a)/sizeof(int); i++)    {
        a[i] = i + 1;
    }
}
```

In this example, `sizeof(a)` returns the size of the pointer `a` and not the array size.

One possible correction is to use another means to determine the array size.

```
#define MAX_SIZE 1024

void func(int a[MAX_SIZE]) {
    int i;
```

```
    for (i = 0; i < MAX_SIZE; i++)    {  
        a[i] = i + 1;  
    }  
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** SIZEOF\_MISUSE

**Impact:** High

**CWE ID:** 467

**CERT C ID:** ARR00-C, ARR01-C, ARR38-C, ARR39-C

**CERT C++ ID:** ARR38-C, ARR39-C

**ISO/IEC TS 17961 ID:** libptr, insufmem, sizeofptr

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## External Websites

Linux man page for strncpy

Linux man page for wcsncpy

## Introduced in R2015b

# Possibly unintended evaluation of expression because of operator precedence rules

Operator precedence rules cause unexpected evaluation order in arithmetic expression

## Description

**Possibly unintended evaluation of expression because of operator precedence rules** occurs when an arithmetic expression result is possibly unintended because operator precedence rules dictate an evaluation order that you do not expect.

The defect highlights expressions of the form  $x \text{ op\_1 } y \text{ op\_2 } z$ . Here,  $\text{op\_1}$  and  $\text{op\_2}$  are operator combinations that commonly induce this error. For instance,  $x == y | z$ .

The checker does not flag all operator combinations. For instance,  $x == y || z$  is not flagged because you most likely intended to perform a logical OR between  $x == y$  and  $z$ . Specifically, the checker flags these combinations:

- $\&\&$  and  $||$ : For instance,  $x || y \&\& z$  or  $x \&\& y || z$ .
- Assignment and bitwise operations: For instance,  $x = y | z$ .
- Assignment and comparison operations: For instance,  $x = y != z$  or  $x = y > z$ .
- Comparison operations: For instance,  $x > y > z$  (except when one of the comparisons is an equality  $x == y > z$ ).
- Shift and numerical operation: For instance,  $x << y + 2$ .
- Pointer dereference and arithmetic: For instance,  $*p++$ .

## Risk

The defect can cause the following issues:

- If you or another code reviewer reviews the code, the intended order of evaluation is not immediately clear.
- It is possible that the result of the evaluation does not meet your expectations. For instance:

- In the operation `*p++`, it is possible that you expect the dereferenced value to be incremented. However, the pointer `p` is incremented before the dereference.
- In the operation `(x == y | z)`, it is possible that you expect `x` to be compared with `y | z`. However, the `==` operation happens before the `|` operation.

### Fix

See if the order of evaluation is what you intend. If not, apply parentheses to implement the evaluation order that you want.

For better readability of your code, it is good practice to apply parenthesis to implement an evaluation order even when operator precedence rules impose that order.

## Examples

### Expressions with Possibly Unintended Evaluation Order

```
int test(int a, int b, int c) {  
    return(a & b == c);  
}
```

In this example, the `==` operation happens first, followed by the `&` operation. If you intended the reverse order of operations, the result is not what you expect.

One possible correction is to apply parenthesis to implement the intended evaluation order.

```
int test(int a, int b, int c) {  
    return((a & b) == c);  
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** OPERATOR\_PRECEDENCE

**Impact:** High

**CWE ID:** 783

**CERT C ID:** EXP00-C, EXP13-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## External Websites

C++ Operator Precedence

**Introduced in R2015b**

## Precision loss in integer to float conversion

Least significant bits of integer lost during conversion to floating-point type

### Description

**Precision loss from integer to float conversion** occurs when you cast an integer value to a floating-point type that cannot represent the original integer value.

For instance, the `long int` value 1234567890L is too large for a variable of type `float`.

### Risk

If the floating-point type cannot represent the integer value, the behavior is undefined (see C11 standard, 6.3.1.4, paragraph 2). For instance, least significant bits of the variable value can be dropped leading to unexpected results.

### Fix

Convert to a floating-point type that can represent the integer value.

For instance, if the `float` data type cannot represent the integer value, use the `double` data type instead.

When writing a function that converts an integer to floating point type, before the conversion, check if the integer value can be represented in the floating-point type. For instance, `DBL_MANT_DIG * log2(FLT_RADIX)` represents the number of base-2 digits in the type `double`. Before conversion to the type `double`, check if this number is greater than or equal to the precision of the integer that you are converting. To determine the precision of an integer `num`, use this code:

```
size_t precision = 0;
while (num != 0) {
    if (num % 2 == 1) {
        precision++;
    }
}
```

```
    num >>= 1;
}
```

Some implementations provide a builtin function to determine the precision of an integer. For instance, GCC provides the function `__builtin_popcount`.

## Examples

### Conversion of Large Integer to Floating-Point Type

```
#include <stdio.h>

int main(void) {
    long int big = 1234567890L;
    float approx = big;
    printf("%ld\n", (big - (long int)approx));
    return 0;
}
```

In this example, the `long int` variable `big` is converted to `float`.

One possible correction is to convert to the `double` data type instead of `float`.

```
#include <stdio.h>

int main(void) {
    long int big = 1234567890L;
    double approx = big;
    printf("%ld\n", (big - (long int)approx));
    return 0;
}
```

## Result Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** `INT_TO_FLOAT_PRECISION_LOSS`

**Impact:** Low

**CWE ID:** 189, 681, 704  
**CERT C ID:** FLP36-C  
**CERT C++ ID:** FLP36-C

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Predefined macro used as an object

You use standard library macros such as `assert` and `errno` as objects

## Description

**Predefined macro used as an object** occurs when you use certain identifiers in a way that requires an underlying object to be present. These identifiers are defined as macros. The C Standard does not allow you to redefine them as objects. You use the identifiers in such a way that macro expansion of the identifiers cannot occur.

For instance, you refer to an external variable `errno`:

```
extern int errno;
```

However, `errno` does not occur as a variable but a macro.

The defect applies to these macros: `assert`, `errno`, `math_errhandling`, `setjmp`, `va_arg`, `va_copy`, `va_end`, and `va_start`. The checker looks for the defect only in source files (not header files).

## Risk

The C11 Standard (Sec. 7.1.4) allows you to redefine most macros as objects. To access the object and not the macro in a source file, you do one of these:

- Redeclare the identifier as an external variable or function.
- For function-like macros, enclose the identifier name in parentheses.

If you try to use these strategies for macros that cannot be redefined as objects, an error occurs.

## Fix

Do not use the identifiers in such a way that a macro expansion is suppressed.

- Do not redeclare the identifiers as external variables or functions.

- For function-like macros, do not enclose the macro name in parentheses.

## Examples

### Use of assert as Function

```
#include<assert.h>
typedef void (*err_handler_func)(int);

extern void demo_handle_err(err_handler_func, int);

void func(int err_code) {
    extern void assert(int);
    demo_handle_err(&(assert), err_code);
}
```

In this example, the `assert` macro is redefined as an external function. When passed as an argument to `demo_handle_err`, the identifier `assert` is enclosed in parentheses, which suppresses use of the `assert` macro.

One possible correction is to directly use the `assert` macro from `assert.h`. A different implementation of the function `demo_handle_err` directly uses the `assert` macro instead of taking the address of an `assert` function.

```
#include<assert.h>
void demo_handle_err(int err_code) {
    assert(err_code == 0);
}

void func(int err_code) {
    demo_handle_err(err_code);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `MACRO_USED_AS_OBJECT`

**Impact:** Low

**CERT C ID:** MSC38-C

**CERT C++ ID:** MSC38-C

## **See Also**

MISRA C:2012 Rule 21.2

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Predictable block cipher initialization vector

Initialization vector is generated from a weak random number generator

### Description

**Predictable block cipher initialization vector** occurs when you use a weak random number generator for the block cipher initialization vector.

### Risk

If you use a weak random number generator for the initiation vector, your data is vulnerable to dictionary attacks.

Block ciphers break your data into blocks of fixed size. Block cipher modes such as CBC (Cipher Block Chaining) protect against dictionary attacks by XOR-ing each block with the encrypted output from the previous block. To protect the first block, these modes use a random initialization vector (IV). If you use a weak random number generator for your IV, your data becomes vulnerable to dictionary attacks.

### Fix

Use a strong pseudo-random number generator (PRNG) for the initialization vector. For instance, use:

- OS-level PRNG such as `/dev/random` on UNIX or `CryptGenRandom()` on Windows
- Application-level PRNG such as Advanced Encryption Standard (AES) in Counter (CTR) mode, HMAC-SHA1, etc.

For a list of random number generators that are cryptographically weak, see [Vulnerable pseudo-random number generator](#).

## Examples

### Predictable Initialization Vector

```
#include <openssl/evp.h>
#include <openssl/rand.h>
#include <stdlib.h>
#define SIZE16 16

int func(EVP_CIPHER_CTX *ctx, unsigned char *key){
    unsigned char iv[SIZE16];
    RAND_pseudo_bytes(iv, 16);
    return EVP_CipherInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv, 1);
}
```

In this example, the function `RAND_pseudo_bytes` declared in `openssl/rand.h` produces the initialization vector. The byte sequences that `RAND_pseudo_bytes` generates are not necessarily unpredictable.

Use a strong random number generator to produce the initialization vector. The corrected code here uses the function `RAND_bytes` declared in `openssl/rand.h`.

```
#include <openssl/evp.h>
#include <openssl/rand.h>
#include <stdlib.h>
#define SIZE16 16

int func(EVP_CIPHER_CTX *ctx, unsigned char *key){
    unsigned char iv[SIZE16];
    RAND_bytes(iv, 16);
    return EVP_CipherInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv, 1);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_PREDICTABLE\_IV

**Impact:** Medium

**CWE ID:** 310, 329, 330, 338

**CERT C ID:** MSC18-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

# Predictable cipher key

Encryption or decryption key is generated from a weak random number generator

## Description

**Predictable cipher key** occurs when you use a weak random number generator for the encryption or decryption key.

## Risk

If you use a weak random number generator for the encryption or decryption key, an attacker can retrieve your key easily.

You use a key to encrypt and later decrypt your data. If a key is easily retrieved, data encrypted using that key is not secure.

## Fix

Use a strong pseudo-random number generator (PRNG) for the key. For instance:

- Use an OS-level PRNG such as `/dev/random` on UNIX or `CryptGenRandom()` on Windows
- Use an application-level PRNG such as Advanced Encryption Standard (AES) in Counter (CTR) mode, HMAC-SHA1, etc.

For a list of random number generators that are cryptographically weak, see [Vulnerable pseudo-random number generator](#).

## Examples

### Predictable Cipher Key

```
#include <openssl/evp.h>
#include <openssl/rand.h>
#include <stdlib.h>
#define SIZE16 16

int func(EVP_CIPHER_CTX *ctx, unsigned char *iv){
    unsigned char key[SIZE16];
    RAND_pseudo_bytes(key, 16);
    return EVP_CipherInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv, 1);
}
```

In this example, the function `RAND_pseudo_bytes` declared in `openssl/rand.h` produces the cipher key. However, the byte sequences that `RAND_pseudo_bytes` generates are not necessarily unpredictable.

One possible correction is to use a strong random number generator to produce the cipher key. The corrected code here uses the function `RAND_bytes` declared in `openssl/rand.h`.

```
#include <openssl/evp.h>
#include <openssl/rand.h>
#include <stdlib.h>
#define SIZE16 16

int func(EVP_CIPHER_CTX *ctx, unsigned char *iv){
    unsigned char key[SIZE16];
    RAND_bytes(key, 16);
    return EVP_CipherInit_ex(ctx, EVP_aes_128_cbc(), NULL, key, iv, 1);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** `CRYPTO_CIPHER_PREDICTABLE_KEY`

**Impact:** Medium

**CWE ID:** 310, 326, 330, 338

**CERT C ID:** MSC18-C

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Predictable random output from predictable seed

Seeding routine uses a predictable seed making the output predictable

### Description

**Predictable random output from predictable seed** looks for random standard functions that use a nonconstant but predictable seed. Examples of predictable seed generators are `time`, `gettimeofday`, and `getpid`.

### Risk

When you use predictable seed values for random number generation, your random numbers are also predictable. A hacker can disrupt your program if they know how your program behaves.

### Fix

You can use a different function to generate less predictable seeds.

You can also use a different random number generator that does not require a seed. For example, the Windows API function `rand_s` seeds itself by default. It uses information from the entire system, for example, system time, thread ids, system counter, and memory clusters. This information is more random and a user cannot access this information.

Some standard random routines are inherently cryptographically weak on page 3-817, and should not be used for security purposes.

## Examples

### Seed as an Argument

```
#include <stdlib.h>
#include <time.h>
```

```
void seed_rng(int seed)
{
    srand(seed);
}

int generate_num(void)
{
    seed_rng(time(NULL) + 3);
    /* ... */
}
```

This example uses `srand` to start the random number generator with `seed` as the seed. However, `seed` is predictable because the function `time` generates it. So, an attacker can predict the random numbers generated by `srand`.

One possible correction is to use a random number generator that does not require a seed. This example uses `rand_s`.

```
#define _CRT_RAND_S

#include <stdlib.h>
#include <stdio.h>
#include <errno.h>

int generate_num(void)
{
    unsigned int number;
    errno_t err;
    err = rand_s(&number);

    if(err != 0)
    {
        return number;
    }
    else
    {
        return err;
    }
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** RAND\_SEED\_PREDICTABLE

**Impact:** Medium

**CWE ID:** 330, 337

**CERT C ID:** MSC32-C

**CERT C++ ID:** MSC32-C, MSC51-CPP

## See Also

Deterministic random output from constant seed | Unsafe standard encryption function | Vulnerable pseudo-random number generator

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Preprocessor directive in macro argument

You use a preprocessor directive in the argument to a function-like macro

## Description

**Preprocessor directive in macro argument** occurs when you use a preprocessor directive in the argument to a function-like macro or a function that might be implemented as a function-like macro.

For instance, a `#ifdef` statement occurs in the argument to a `memcpy` function. The `memcpy` function might be implemented as a macro.

```
memcpy(dest, src,  
    #ifdef PLATFORM1  
        12  
    #else  
        24  
    #endif  
);
```

The checker flags similar usage in `printf` and `assert`, which can also be implemented as macros.

## Risk

During preprocessing, a function-like macro call is replaced by the macro body and the parameters are replaced by the arguments to the macro call (argument substitution). Suppose a macro `min()` is defined as follows.

```
#define min(X, Y) ((X) < (Y) ? (X) : (Y))
```

When you call `min(1,2)`, it is replaced by the body `((X) < (Y) ? (X) : (Y))`. `X` and `Y` are replaced by 1 and 2.

According to the C11 Standard (Sec. 6.10.3), if the list of arguments to a function-like macro itself has preprocessing directives, the argument substitution during preprocessing is undefined.

## Fix

To ensure that the argument substitution happens in an unambiguous manner, use the preprocessor directives outside the function-like macro.

For instance, to execute `memcpy` with different arguments based on a `#ifdef` directive, call `memcpy` multiple times within the `#ifdef` directive branches.

```
#ifdef PLATFORM1
    memcpy(dest, src, 12);
#else
    memcpy(dest, src, 24);
#endif
```

## Examples

### Directives in Function-Like Macros

```
#include <stdio.h>

#define print(A) printf(#A)

void func(void) {
    print(
#ifdef SW
        "Message 1"
#else
        "Message 2"
#endif
    );
}
```

In this example, the preprocessor directives `#ifdef` and `#endif` occur in the argument to the function-like macro `print()`.

One possible correction is to use the function-like macro multiple times in the branches of the `#ifdef` directive.

```
#include <stdio.h>
```

```
#define print(A) printf(#A)

void func(void) {
#ifdef SW
    print("Message 1");
#else
    print("Message 2");
#endif
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** PRE\_DIRECTIVE\_MACRO\_ARG

**Impact:** Low

**CERT C ID:** PRE32-C

**CERT C++ ID:** PRE32-C

## See Also

MISRA C:2012 Rule 20.6

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Privilege drop not verified

Attacker can gain unintended elevated access to program

### Description

**Privilege drop not verified** detects calls to functions that relinquish privileges. If you do not verify that the privileges were dropped before the end of your function, a defect is raised.

### Risk

If privilege relinquishment fails, an attacker can regain elevated privileges and have more access to your program than intended. This security hole can cause unexpected behavior in your code if left open.

### Fix

Before the end of scope, verify that the privileges that you dropped were actually dropped.

## Examples

### Drop Privileges Within a Function

```
#define _BSD_SOURCE
#include <sys/types.h>
#include <unistd.h>
#include <grp.h>
#include <stdlib.h>
#define fatal_error() abort()
extern int need_more_privileges;

void missingpriviledgedropcheck()
{
    /* Code intended to run with elevated privileges */
```

```
/* Temporarily drop elevated privileges */
if (seteuid(getuid()) != 0) {
    /* Handle error */
    fatal_error();
}

/* Code intended to run with lower privileges */

if (need_more_privileges) {
    /* Restore elevated privileges */
    if (seteuid(0) != 0) {
        /* Handle error */
        fatal_error();
    }
    /* Code intended to run with elevated privileges */
}

/* ... */

/* Permanently drop elevated privileges */
if (setuid(getuid()) != 0) {
    /* Handle error */
    fatal_error();
}

/* Code intended to run with lower privileges */
}
```

In this example, privileges are elevated and dropped to run code with the intended privilege level. When privileges are dropped, the privilege level before exiting the function body is not verified. A malicious attacker can regain their elevated privileges.

One possible correction is to use `setuid` to verify that the privileges were dropped.

```
#define _BSD_SOURCE
#include <sys/types.h>
#include <unistd.h>
#include <grp.h>
#include <stdlib.h>
#define fatal_error() abort()
extern int need_more_privileges;

void missingpriviledgedropcheck()
```

```
{
    /* Store the privileged ID for later verification */
    uid_t privid = geteuid();

    /* Code intended to run with elevated privileges */

    /* Temporarily drop elevated privileges */
    if (seteuid(getuid()) != 0) {
        /* Handle error */
        fatal_error();
    }

    /* Code intended to run with lower privileges */

    if (need_more_privileges) {
        /* Restore elevated Privileges */
        if (seteuid(privid) != 0) {
            /* Handle error */
            fatal_error();
        }
        /* Code intended to run with elevated privileges */
    }

    /* ... */

    /* Restore privileges if needed */
    if (geteuid() != privid) {
        if (seteuid(privid) != 0) {
            /* Handle error */
            fatal_error();
        }
    }

    /* Permanently drop privileges */
    if (setuid(getuid()) != 0) {
        /* Handle error */
        fatal_error();
    }

    if (setuid(0) != -1) {
        /* Privileges can be restored, handle error */
        fatal_error();
    }
}
```

```
    /* Code intended to run with lower privileges; */  
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MISSING\_PRIVILEGE\_DROP\_CHECK

**Impact:** High

**CWE ID:** 250, 273

**CERT C ID:** POS37-C

**CERT C++ ID:** POS37-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

## Qualifier removed in conversion

Variable qualifier is lost during conversion

### Description

**Qualifier removed in conversion** occurs during a conversion when one variable has a qualifier and the other does not. For example, when converting from a `const int` to an `int`, the conversion removes the `const` qualifier.

This defect applies only for projects in C.

### Examples

#### Cast of Character Pointers

```
void implicit_cast(void) {
    const char  cc, *pcc = &cc;
    char * quo;

    quo = &cc;
    quo = pcc;

    read(quo);
}
```

During the assignment to the character `q`, the variables, `cc` and `pcc`, are converted from `const char` to `char`. The `const` qualifier is removed during the conversion causing a defect.

One possible correction is to add the same qualifiers to the new variables. In this example, changing `q` to a `const char` fixes the defect.

```
void implicit_cast(void) {
    const char  cc, *pcc = &cc;
    const char * quo;
```

```
    quo = &cc;
    quo = pcc;

    read(quo);
}
```

One possible correction is to remove the qualifiers in the converted variable. In this example, removing the `const` qualifier from the `cc` and `pcc` initialization fixes the defect.

```
void implicit_basic_cast(void) {
    char cc, *pcc = &cc;
    char * quo;

    quo = &cc;
    quo = pcc;

    read(quo);
}
```

## Check Information

**Group:** Programming

**Language:** C

**Default:** Off

**Command-Line Syntax:** QUALIFIER\_MISMATCH

**Impact:** Low

**CWE ID:** 704

**CERT C ID:** EXP05-C, EXP32-C, EXP37-C

**CERT C++ ID:** EXP37-C

**ISO/IEC TS 17961 ID:** argcomp

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Resource leak

File stream not closed before FILE pointer scope ends or pointer is reassigned

## Description

**Resource leak** occurs when you open a file stream by using a FILE pointer but do not close it before:

- The end of the pointer's scope.
- Assigning the pointer to another stream.

## Risk

If you do not release file handles explicitly as soon as possible, a failure can occur due to exhaustion of resources.

## Fix

Close a FILE pointer before the end of its scope, or before you assign the pointer to another stream.

## Examples

### FILE Pointer Not Released Before End of Scope

```
#include <stdio.h>

void func1( void ) {
    FILE *fp1;
    fp1 = fopen ( "data1.txt", "w" );
    fprintf ( fp1, "*" );

    fp1 = fopen ( "data2.txt", "w" );
    fprintf ( fp1, "!" );
}
```

```
    fclose ( fp1 );  
}
```

In this example, the file pointer `fp1` is pointing to a file `data1.txt`. Before `fp1` is explicitly dissociated from the file stream of `data1.txt`, it is used to access another file `data2.txt`.

One possible correction is to explicitly dissociate `fp1` from the file stream of `data1.txt`.

```
#include <stdio.h>  
  
void func1( void ) {  
    FILE *fp1;  
    fp1 = fopen ( "data1.txt", "w" );  
    fprintf ( fp1, "*" );  
    fclose(fp1);  
  
    fp1 = fopen ( "data2.txt", "w" );  
    fprintf ( fp1, "!" );  
    fclose ( fp1 );  
}
```

## Result Information

**Group:** Resource management

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** RESOURCE\_LEAK

**Impact:** High

**CWE ID:** 772

**CERT C ID:** FIO42-C, MEM12-C

**CERT C++ ID:** FIO42-C, FIO51-CPP

**ISO/IEC TS 17961 ID:** fcloselose

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Return from computational exception signal handler

Undefined behavior when signal handler returns normally from program error

### Description

**Return from computational exception signal handler** occurs when a signal handler returns after catching a computational exception signal SIGFPE, SIGILL, or SIGSEGV.

### Risk

A signal handler that returns normally from a computational exception is undefined behavior. Even if the handler attempts to fix the error that triggered the signal, the program can behave unexpectedly.

### Fix

Check the validity of the values of your variables before the computation to avoid using a signal handler to catch exceptions. If you cannot avoid a handler to catch computation exception signals, call `abort()`, `quick_exit()`, or `_Exit()` in the handler to stop the program.

## Examples

### Signal Handler Return from Division by Zero

```
#include <errno.h>
#include <limits.h>
#include <signal.h>
#include <stdlib.h>

static volatile sig_atomic_t denom;
/* Declare signal handler to catch division by zero
computation error. */
```

```
void sig_handler(int s)
{
    int s0 = s;
    if (denom == 0)
    {
        denom = 1;
    }
    /* Normal return from computation exception
    signal */
    return;
}

long func(int v)
{
    denom = (sig_atomic_t)v;

    if (signal(SIGFPE, sig_handler) == SIG_ERR)
    {
        /* Handle error */
    }

    long result = 100 / (long)denom;
    return result;
}
```

In this example, `sig_handler` is declared to handle a division by zero computation error. The handler changes the value of `denom` if it is zero and returns, which is undefined behavior.

After catching a computational exception, call `abort()` from `sig_handler` to exit the program without further error.

```
#include <errno.h>
#include <limits.h>
#include <signal.h>
#include <stdlib.h>

static volatile sig_atomic_t denom;
/* Declare signal handler to catch division by zero
computation error. */
```

```
void sig_handler(int s)
{
    int s0 = s;
    /* call to abort() to exit the program */
    abort();
}

long func(int v)
{
    denom = (sig_atomic_t)v;

    if (signal(SIGFPE, sig_handler) == SIG_ERR)
    {
        /* Handle error */
    }

    long result = 100 / (long)denom;
    return result;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** SIG\_HANDLER\_COMP\_EXCP\_RETURN

**Impact:** Low

**CWE ID:** 387

**CERT C ID:** SIG35-C

**CERT C++ ID:** SIG35-C

## See Also

Function called from signal handler not asynchronous-safe | Function called from signal handler not asynchronous-safe (strict) | Signal call from within signal handler

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Return of non const handle to encapsulated data member

Method returns pointer or reference to internal member of object

### Description

**Return of non-const handle to encapsulated data member** occurs when:

- A class method returns a handle to a data member. Handles include pointers and references.
- The method is more accessible than the data member. For instance, the method has access specifier `public`, but the data member is `private` or `protected`.

### Risk

The access specifier determines the accessibility of a class member. For instance, a class member declared with the `private` access specifier cannot be accessed outside a class. Therefore, nonmember, nonfriend functions cannot modify the member.

When a class method returns a handle to a less accessible data member, the member accessibility changes. For instance, if a `public` method returns a pointer to a `private` data member, the data member is effectively not `private` anymore. A nonmember, nonfriend function calling the `public` method can use the returned pointer to view and modify the data member.

Also, if you assign the pointer to a data member of an object to another pointer, when you delete the object, the second pointer can be left dangling. The second pointer points to the part of an object that does not exist anymore.

### Fix

One possible fix is to avoid returning a handle to a data member from a class method. Return a data member by value so that a copy of the member is returned. Modifying the copy does not change the data member.

If you must return a handle, use a const qualifier with the method return type so that the handle allows viewing, but not modifying, the data member.

## Examples

### Return of Pointer to private Data Member

```
#include <string>
#define NUM_RECORDS 100

struct Date {
    int dd;
    int mm;
    int yyyy;
};

struct Period {
    Date startDate;
    Date endDate;
};

class DataBaseEntry {
private:
    std::string employeeName;
    Period employmentPeriod;
public:
    Period* getPeriod(void);
};

Period* DataBaseEntry::getPeriod(void) {
    return &employmentPeriod;
}

void use(Period*);
void reset(Period*);

int main() {
    DataBaseEntry dataBase[NUM_RECORDS];
    Period* tempPeriod;
    for(int i=0;i < NUM_RECORDS;i++) {
```

```
        tempPeriod = dataBase[i].getPeriod();
        use(tempPeriod);
        reset(tempPeriod);
    }
    return 0;
}

void reset(Period* aPeriod) {
    aPeriod->startDate.dd = 1;
    aPeriod->startDate.mm = 1;
    aPeriod->startDate.yyyy = 2000;
}
```

In this example, `employmentPeriod` is private to the class `DataBaseEntry`. It is therefore immune from modification by nonmember, nonfriend functions. However, returning a pointer to `employmentPeriod` breaks this encapsulation. For instance, the nonmember function `reset` modifies the member `startDate` of `employmentPeriod`.

One possible correction is to return the data member `employmentPeriod` by value instead of pointer. Modifying the return value does not change the data member because the return value is a copy of the data member.

```
#include <string>
#define NUM_RECORDS 100

struct Date {
    int dd;
    int mm;
    int yyyy;
};

struct Period {
    Date startDate;
    Date endDate;
};

class DataBaseEntry {
private:
    std::string employeeName;
    Period employmentPeriod;
public:
    Period getPeriod(void);
};
```

```
};

Period DataBaseEntry::getPeriod(void) {
    return employmentPeriod;
}

void use(Period*);
void reset(Period*);

int main() {
    DataBaseEntry dataBase[NUM_RECORDS];
    Period tempPeriodVal;
    Period* tempPeriod;
    for(int i=0;i < NUM_RECORDS;i++) {
        tempPeriodVal = dataBase[i].getPeriod();
        tempPeriod = &tempPeriodVal;
        use(tempPeriod);
        reset(tempPeriod);
    }
    return 0;
}

void reset(Period* aPeriod) {
    aPeriod->startDate.dd = 1;
    aPeriod->startDate.mm = 1;
    aPeriod->startDate.yyyy = 2000;
}
```

## Result Information

**Group:** Object oriented

**Language:** C++

**Default:** Off

**Command-Line Syntax:** BREAKING\_DATA\_ENCAPSULATION

**Impact:** Medium

**CWE ID:** 375, 767

## **See Also**

### **Polyspace Analysis Options**

Find defects (-checkers)

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Returned value of a sensitive function not checked

Sensitive functions called without checking for unexpected return values and errors

## Description

**Returned value of a sensitive function not checked** occurs when you call sensitive standard functions, but you:

- Ignore the return value.
- Use an output or a return value without testing the validity of the return value.

For this defect, two type of functions are considered: ***sensitive*** and ***critical sensitive***.

A ***sensitive*** function is a standard function that can encounter:

- Exhausted system resources (for example, when allocating resources)
- Changed privileges or permissions
- Tainted sources when reading, writing, or converting data from external sources
- Unsupported features despite an existing API

A ***critical sensitive*** function is a sensitive function that performs one of these critical or vulnerable tasks:

- Set privileges (for example, `setuid`)
- Create a jail (for example, `chroot`)
- Create a process (for example, `fork`)
- Create a thread (for example, `pthread_create`)
- Lock or unlock mutex (for example, `pthread_mutex_lock`)
- Lock or unlock memory segments (for example, `mlock`)

## Risk

If you do not check the return value of functions that perform sensitive or critical sensitive tasks, your program can behave unexpectedly. Errors from these functions can

propagate throughout the program causing incorrect output, security vulnerabilities, and possibly system failures.

## Fix

Before continuing with the program, test the return value of *critical sensitive* functions.

For *sensitive functions*, you can explicitly ignore a return value by casting the function to `void`. Polyspace does not raise this defect for sensitive functions cast to `void`. This resolution is not accepted for *critical sensitive functions* because they perform more vulnerable tasks.

## Examples

### Sensitive Function Return Ignored

```
#include <pthread.h>

void initialize() {
    pthread_attr_t attr;

    pthread_attr_init(&attr);
}
```

This example shows a call to the sensitive function `pthread_attr_init`. The return value of `pthread_attr_init` is ignored, causing a defect.

One possible correction is to cast the function to `void`. This fix informs Polyspace and any reviewers that you are explicitly ignoring the return value of the sensitive function.

```
#include <pthread.h>

void initialize() {
    pthread_attr_t attr;

    (void)pthread_attr_init(&attr);
}
```

One possible correction is to test the return value of `pthread_attr_init` to check for errors.

```
#include <pthread.h>
#include <stdlib.h>
#define fatal_error() abort()

void initialize() {
    pthread_attr_t attr;
    int result;

    result = pthread_attr_init(&attr);
    if (result != 0) {
        /* Handle error */
        fatal_error();
    }
}
```

## Critical Function Return Ignored

```
#include <pthread.h>
extern void *start_routine(void *);

void returnnotchecked() {
    pthread_t thread_id;
    pthread_attr_t attr;
    void *res;

    (void)pthread_attr_init(&attr);
    (void)pthread_create(&thread_id, &attr, &start_routine, ((void *)0));
    pthread_join(thread_id, &res);
}
```

In this example, two critical functions are called: `pthread_create` and `pthread_join`. The return value of the `pthread_create` is ignored by casting to `void`, but because `pthread_create` is a critical function (not just a sensitive function), Polyspace does not ignore this *Return value of a sensitive function not checked* defect. The other critical function, `pthread_join`, returns value that is ignored implicitly. `pthread_join` uses the return value of `pthread_create`, which was not checked.

The correction for this defect is to check the return value of these critical functions to verify the function performed as expected.

```
#include <pthread.h>
#include <stdlib.h>
#define fatal_error() abort()

extern void *start_routine(void *);

void returnnotchecked() {
    pthread_t thread_id;
    pthread_attr_t attr;
    void *res;
    int result;

    (void)pthread_attr_init(&attr);
    result = pthread_create(&thread_id, &attr, &start_routine, NULL);
    if (result != 0) {
        /* Handle error */
        fatal_error();
    }

    result = pthread_join(thread_id, &res);
    if (result != 0) {
        /* Handle error */
        fatal_error();
    }
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** RETURN\_NOT\_CHECKED

**Impact:** High

**CWE ID:** 252, 253, 690, 754

**CERT C ID:** EXP12-C, ERR33-C, POS54-C

**CERT C++ ID:** ERR33-C, POS54-C

**ISO/IEC TS 17961 ID:** liberr

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

## Self assignment not tested in operator

Copy assignment operator does not test for self-assignment

### Description

**Self assignment not tested in operator** occurs when you do not test if the argument to the copy assignment operator of an object is the object itself.

### Risk

Self-assignment causes unnecessary copying. Though it is unlikely that you assign an object to itself, because of aliasing, you or users of your class cannot always detect a self-assignment.

Self-assignment can cause subtle errors if a data member is a pointer and you allocate memory dynamically to the pointer. In your copy assignment operator, you typically perform these steps:

- 1 Deallocate the memory originally associated with the pointer.

```
delete ptr;
```

- 2 Allocate new memory to the pointer. Initialize the new memory location with contents obtained from the operator argument.

```
ptr = new ptrType(*(opArgument.ptr));
```

If the argument to the operator, `opArgument`, is the object itself, after your first step, the pointer data member in the operator argument, `opArgument.ptr`, is not associated with a memory location. `*opArgument.ptr` contains unpredictable values. Therefore, in the second step, you initialize the new memory location with unpredictable values.

### Fix

Test for self-assignment in the copy assignment operator of your class. Only after the test, perform the assignments in the copy assignment operator.

## Examples

### Missing Test for Self-Assignment

```
class MyClass1 { };
class MyClass2 {
public:
    MyClass2()                : p_(new MyClass1())        { }
    MyClass2(const MyClass2& f) : p_(new MyClass1(*f.p_)) { }
    ~MyClass2()               {
        delete p_;
    }
    MyClass2& operator= (const MyClass2& f)
    {
        delete p_;
        p_ = new MyClass1(*f.p_);
        return *this;
    }
private:
    MyClass1* p_;
};
```

In this example, the copy assignment operator in `MyClass2` does not test for self-assignment. If the parameter `f` is the current object, after the statement `delete p_`, the memory allocated to pointer `f.p_` is also deallocated. Therefore, the statement `p_ = new MyClass1(*f.p_)` initializes the memory location that `p_` points to with unpredictable values.

One possible correction is to test for self-assignment in the copy assignment operator.

```
class MyClass1 { };
class MyClass2 {
public:
    MyClass2()                : p_(new MyClass1())        { }
    MyClass2(const MyClass2& f) : p_(new MyClass1(*f.p_)) { }
    ~MyClass2()               {
        delete p_;
    }
    MyClass2& operator= (const MyClass2& f)
    {
        if(&f != this) {
            delete p_;
        }
    }
private:
    MyClass1* p_;
};
```

```
        p_ = new MyClass1(*f.p_);
    }
    return *this;
}
private:
    MyClass1* p_;
};
```

### Result Information

**Group:** Object oriented

**Language:** C++

**Default:** Off

**Command-Line Syntax:** MISSING\_SELF\_ASSIGN\_TEST

**Impact:** Medium

**CERT C++ ID:** OOP54-CPP

### See Also

Find defects (-checkers)

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Sensitive data printed out

Function prints sensitive data

## Description

**Sensitive data printed out** detects print functions, such as `stdout` or `stderr`, that print sensitive information.

The checker considers the following as sensitive information:

- Return values of password manipulation functions such as `getpw`, `getpwnam` or `getpwuid`.
- Input values of functions such as the Windows-specific function `LogonUser`.

## Risk

Printing sensitive information, such as passwords or user information, allows an attacker additional access to the information.

## Fix

One fix for this defect is to not print out sensitive information.

If you are saving your logfile to an external file, set the file permissions so that attackers cannot access the logfile information.

## Examples

### Printing Passwords

```
#include <sys/types.h>
#include <pwd.h>
#include <stdio.h>
#include <string.h>
```

```
#include <unistd.h>

extern void verify_null(const char* buf);
void bug_sensitivedataprint(const char * my_user) {
    struct passwd* result, pwd;
    long bufsize = sysconf(_SC_GETPW_R_SIZE_MAX);
    char buf[1024] = "";
    getpwnam_r(my_user, &pwd, buf, bufsize, &result);
    puts("Name\n");
    puts(pwd.pw_name);
    puts("PassWord\n");
    puts(pwd.pw_passwd);
    memset(buf, 0, sizeof(buf));
    verify_null(buf);
}
```

In this example, Bug Finder flags `puts` for printing out the password `pwd.pw_passwd`.

One possible correction is to obfuscate the password information so that the information is not visible.

```
#include <sys/types.h>
#include <pwd.h>
#include <stdio.h>
#include <string.h>
#include <unistd.h>

extern void verify_null(const char* buf);

void sensitivedataprint(const char * my_user) {
    struct passwd* result, pwd;
    long bufsize = sysconf(_SC_GETPW_R_SIZE_MAX);
    char buf[1024] = "";
    getpwnam_r(my_user, &pwd, buf, bufsize, &result);
    puts("Name\n");
    puts(pwd.pw_name);
    puts("PassWord\n");
    puts("XXXXXXXXX\n");
    memset(buf, 0, sizeof(buf));
    verify_null(buf);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SENSITIVE\_DATA\_PRINT

**Impact:** Medium

**CWE ID:** 532, 534, 535

**CERT C ID:** MEM06-C

## See Also

Sensitive heap memory not cleared before release|Uncleared sensitive data in stack

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Sensitive heap memory not cleared before release

Sensitive data not cleared or released by memory routine

### Description

**Sensitive heap memory not cleared before release** detects dynamically allocated memory containing sensitive data. If you do not clear the sensitive data when you free the memory, Bug Finder raises a defect on the `free` function.

### Risk

If the memory zone is reallocated, an attacker can still inspect the sensitive data in the old memory zone.

### Fix

Before calling `free`, clear out the sensitive data using `memset` or `SecureZeroMemory`.

## Examples

### Sensitive Buffer Freed, Not Cleared

```
#include <unistd.h>
#include <stdlib.h>
#include <string.h>
#include <sys/types.h>
#include <pwd.h>

void sensitiveheapnotcleared(const char * my_user) {
    struct passwd* result, pwd;
    long bufsize = sysconf(_SC_GETPW_R_SIZE_MAX);
    char* buf = (char*) malloc(1024);
    getpwnam_r(my_user, &pwd, buf, bufsize, &result);
```

```
    free(buf);  
}
```

In this example, the function uses a buffer of passwords and frees the memory before the end of the function. However, the data in the memory is not cleared by using the `free` command.

One possible correction is to write over the data to clear out the sensitive information. This example uses `memset` to write over the data with zeros.

```
#include <unistd.h>  
#include <stdlib.h>  
#include <string.h>  
#include <sys/types.h>  
#include <pwd.h>  
#include <assert.h>  
  
#define isNull(arr) for(int i=0; i<(sizeof(arr)/sizeof(arr[0])); i++) assert(arr[i]==0)  
  
void sensitiveheapnotcleared(const char * my_user) {  
    struct passwd* result, pwd;  
    long bufsize = sysconf(_SC_GETPW_R_SIZE_MAX);  
    char* buf = (char*) malloc(1024);  
  
    if (buf) {  
        getpwnam_r(my_user, &pwd, buf, bufsize, &result);  
        memset(buf, 0, (size_t)1024);  
        isNull(buf);  
        free(buf);  
    }  
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SENSITIVE\_HEAP\_NOT\_CLEARED

**Impact:** Medium

**CWE ID:** 244, 312, 316

**CERT C ID:** MEM03-C, MSC18-C

## **See Also**

Uncleared sensitive data in stack | Sensitive data printed out

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Shared data access within signal handler

Access or modification of shared data causes inconsistent state

## Description

**Shared data access within signal handler** occurs when you access or modify a shared object inside a signal handler.

## Risk

When you define a signal handler function to access or modify a shared object, the handler accesses or modifies the shared object when it receives a signal. If another function is already accessing the shared object, that function causes a race condition and can leave the data in an inconsistent state.

## Fix

To access or modify shared objects inside a signal handler, check that the objects are lock-free atomic, or, if they are integers, declare them as `volatile sig_atomic_t`.

## Examples

### int Variable Access in Signal Handler

```
#include <signal.h>
#include <stdlib.h>
#include <string.h>

/* declare global variable. */
int e_flag;

void sig_handler(int signum)
{
    /* Signal handler accesses variable that is not
       of type volatile sig_atomic_t. */
```

```
    e_flag = signum;
}

int func(void)
{
    if (signal(SIGINT, sig_handler) == SIG_ERR)
    {
        /* Handle error */
        abort();
    }
    /* Program code */
    if (raise(SIGINT) != 0)
    {
        /* Handle error */
        abort();
    }
    /* More code */
    return 0;
}
```

In this example, `sig_handler` accesses `e_flag`, a variable of type `int`. A concurrent access by another function can leave `e_flag` in an inconsistent state.

Before you access a shared variable from a signal handler, declare the variable with type `volatile sig_atomic_t` instead of `int`. You can safely access variables of this type asynchronously.

```
#include <signal.h>
#include <stdlib.h>
#include <string.h>

/* Declare variable of type volatile sig_atomic_t. */
volatile sig_atomic_t e_flag;
void sig_handler(int signum)
{
    /* Use variable of proper type inside signal handler. */
    e_flag = signum;
}

int func(void)
{
```

```
if (signal(SIGINT, sig_handler) == SIG_ERR)
{
    /* Handle error */
    abort();
}
/* Program code */
if (raise(SIGINT) != 0)
{
    /* Handle error */
    abort();
}
/* More code */
return 0;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** SIG\_HANDLER\_SHARED\_OBJECT

**Impact:** Medium

**CWE ID:** 364, 413

**CERT C ID:** SIG31-C

**CERT C++ ID:** SIG31-C

**ISO/IEC TS 17961 ID:** accsig

## See Also

Function called from signal handler not asynchronous-safe | Signal call from within signal handler

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Shift of a negative value

Shift operator on negative value

### Description

**Shift of a negative value** occurs when a bit-wise shift is used on a variable that can have negative values. Shifts can overwrite the sign bit that identifies a number as negative.

### Examples

#### Shifting a negative variable

```
int shifting(int val)
{
    int res = -1;
    return res << val;
}
```

In the return statement, the variable `res` is shifted a certain number of bits to the left. However, because `res` is negative, the shift might overwrite the sign bit.

One possible correction is to change the data type of the shifted variable to unsigned. This correction eliminates the sign bit, so left shifting does not change the sign of the variable.

```
int shifting(int val)
{
    unsigned int res = -1;
    return res << val;
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SHIFT\_NEG

**Impact:** Low

**CWE ID:** 189

**CERT C ID:** INT34-C

**CERT C++ ID:** INT34-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Shift operation overflow

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Shift operation overflow

Overflow from shifting operation

### Description

**Shift operation overflow** occurs when a shift operation can result in values that cannot be represented by the result data type. The data type of a variable determines the number of bytes allocated for the variable storage and constrains the range of allowed values.

The exact storage allocation for different data types depends on your processor. See Target processor type (-target).

### Examples

#### Left Shift of Integer

```
int left_shift(void) {  
    int foo = 33;  
    return 1 << foo;  
}
```

In the return statement of this function, bit-wise shift operation is performed shifting 1 foo bits to the left. However, an `int` has only 32 bits, so the range of the shift must be between 0 and 31. Therefore, this shift operation causes an overflow.

One possible correction is to store the shift operation result in a larger data type. In this example, by returning a `long long` instead of an `int`, the overflow defect is fixed.

```
long long left_shift(void) {  
    int foo = 33;  
    return 1LL << foo;  
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SHIFT\_OVFL

**Impact:** Low

**CWE ID:** 189, 190

**CERT C ID:** INT34-C

**CERT C++ ID:** INT34-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Side effect of expression ignored

`sizeof`, `_Alignof`, or `_Generic` operates on expression with side effect

### Description

**Side effect of expression ignored** occurs when the `sizeof`, `_Alignof`, or `_Generic` operator operates on an expression with a side effect. When evaluated, an expression with side effect modifies at least one of the variables in the expression.

For instance, the defect checker does not flag `sizeof(n+1)` because `n+1` does not modify `n`. The checker flags `sizeof(n++)` because `n++` is intended to modify `n`.

The check also applies to the C++ operator `alignof` and its C extensions, `__alignof__` and `__typeof__`.

### Risk

The expression in a `_Alignof` or `_Generic` operator is not evaluated. The expression in a `sizeof` operator is evaluated only if it is required for calculating the size of a variable-length array, for instance, `sizeof(a[n++] )`.

When an expression with a side effect is not evaluated, the variable modification from the side effect does not happen. If you rely on the modification, you can see unexpected results.

### Fix

Evaluate the expression with a side effect in a separate statement, and then use the result in a `sizeof`, `_Alignof`, or `_Generic` operator.

For instance, instead of:

```
a = sizeof(n++);
```

perform the operation in two steps:

```
n++;  
a = sizeof(n);
```

The checker considers a function call as an expression with a side effect. Even if the function does not have side effects now, it might have side effects on later additions. The code is more maintainable if you call the function outside the `sizeof` operator.

## Examples

### Increment Operator in `sizeof`

```
#include <stdio.h>

void func(void) {
    unsigned int a = 1U;
    unsigned int b = (unsigned int)sizeof(++a);
    printf ("%u, %u\n", a, b);
}
```

In this example, `sizeof` operates on `++a`, which is intended to modify `a`. Because the expression is not evaluated, the modification does not happen. The `printf` statement shows that `a` still has the value 1.

One possible correction is to perform the increment first, and then provide the result to the `sizeof` operator.

```
#include <stdio.h>

void func(void) {
    unsigned int a = 1U;
    ++a;
    unsigned int b = (unsigned int)sizeof (a);
    printf ("%u, %u\n", a, b);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `SIDE_EFFECT_IGNORED`

**Impact:** Low

**CERT C ID:** EXP44-C  
**CERT C++ ID:** EXP52-CPP

## **See Also**

MISRA C:2012 Rule 13.6

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Side effect in arguments to unsafe macro

Macro contains arguments that can be evaluated multiple times or not evaluated

### Description

**Side effect in arguments to unsafe macro** occurs when you call an unsafe macro with an expression that has a side effect.

- *Unsafe macro*: When expanded, an unsafe macro evaluates its arguments multiple times or does not evaluate its argument at all.

For instance, the ABS macro evaluates its argument  $x$  twice.

```
#define ABS(x) (((x) < 0) ? -(x) : (x))
```

- *Side effect*: When evaluated, an expression with a side effect modifies at least one of the variables in the expression.

For instance,  $++n$  modifies  $n$ , but  $n+1$  does not modify  $n$ .

The checker does not consider side effects in nested macros. The checker also does not consider function calls or volatile variable access as side effects.

### Risk

If you call an unsafe macro with an expression that has a side effect, the expression is evaluated multiple times or not evaluated at all. The side effect can occur multiple times or not occur at all, causing unexpected behavior.

For instance, in the call `MACRO(++n)`, you expect only one increment of the variable  $n$ . If `MACRO` is an unsafe macro, the increment happens more than once or does not happen at all.

The checker flags expressions with side effects in the `assert` macro because the `assert` macro is disabled in non-debug mode. To compile in non-debug mode, you define the `NDEBUG` macro during compilation. For instance, in GCC, you use the flag `-DNDEBUG`.

## Fix

Evaluate the expression with a side effect in a separate statement, and then use the result as a macro argument.

For instance, instead of:

```
MACRO(++n);
```

perform the operation in two steps:

```
++n;  
MACRO(n);
```

Alternatively, use an inline function instead of a macro. Pass the expression with side effect as argument to the inline function.

The checker considers modifications of a local variable defined only in the block scope of a macro body as a side effect. This defect cannot happen since the variable is visible only in the macro body. If you see a defect of this kind, ignore the defect.

## Examples

### Macro Argument with Side Effects

```
#define ABS(x) ((x) < 0) ? -(x) : (x)  
  
void func(int n) {  
    /* Validate that n is within the desired range */  
    int m = ABS(++n);  
  
    /* ... */  
}
```

In this example, the ABS macro evaluates its argument twice. The second evaluation can result in an unintended increment.

One possible correction is to first perform the increment, and then pass the result to the macro.

```
#define ABS(x) (((x) < 0) ? -(x) : (x))

void func(int n) {
    /* Validate that n is within the desired range */
    ++n;
    int m = ABS(n);

    /* ... */
}
```

Another possible correction is to evaluate the expression in an inline function.

```
static inline int iabs(int x) {
    return (((x) < 0) ? -(x) : (x));
}

void func(int n) {
    /* Validate that n is within the desired range */

    int m = iabs(++n);

    /* ... */
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SIDE\_EFFECT\_IN\_UNSAFE\_MACRO\_ARG

**Impact:** Medium

**CERT C ID:** PRE31-C

**CERT C++ ID:** PRE31-C

## See Also

MISRA C:2012 Rule 13.2 | MISRA C:2012 Rule 13.3 | MISRA C:2012 Rule 13.4 | Side effect of expression ignored | Stream argument with possibly unintended side effects

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Sign change integer conversion overflow

Overflow when converting between signed and unsigned integers

## Description

**Sign change integer conversion overflow** occurs when converting an unsigned integer to a signed integer. If the variable does not have enough bytes to represent both the original constant and the sign bit, the conversion overflows.

The exact storage allocation for different integer types depends on your processor. See `Target processor type (-target)`.

## Examples

### Convert from unsigned char to char

```
char sign_change(void) {
    unsigned char count = 255;

    return (char)count;
}
```

In the return statement, the unsigned character variable `count` is converted to a signed character. However, `char` has 8 bits, 1 for the sign of the constant and 7 to represent the number. The conversion operation overflows because 255 uses 8 bits.

One possible correction is using a larger integer type. By using an `int`, there are enough bits to represent the sign and the number value.

```
int sign_change(void) {
    unsigned char count = 255;

    return (int)count;
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** SIGN\_CHANGE

**Impact:** Medium

**CWE ID:** 192, 194, 195, 196

**CERT C ID:** INT31-C

**CERT C++ ID:** INT31-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Float conversion overflow|Unsigned integer conversion overflow|  
Integer conversion overflow

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Signal call from within signal handler

Nonpersistent signal handler calling `signal()` in Windows system causes race condition

## Description

**Signal call from within signal handler** occurs when you call `signal()` from a nonpersistent signal handler on a Windows platform.

## Risk

A nonpersistent signal handler is reset after catching a signal. The handler does not catch subsequent signals unless the handler is reestablished by calling `signal()`. A nonpersistent signal handler on a Windows platform is reset to `SIG_DFL`. If another signal interrupts the execution of the handler, that signal can cause a race condition between `SIG_DFL` and the existing signal handler. A call to `signal()` can also result in an infinite loop inside the handler.

## Fix

Do not call `signal()` from a signal handler on Windows platforms.

## Examples

### `signal()` Called from Signal Handler

```
#include <stdio.h>
#include <stdlib.h>
#include <signal.h>
#include <unistd.h>
```

```
volatile sig_atomic_t e_flag = 0;
```

```
void sig_handler(int signum)
```

```
{
    int s0 = signum;
    e_flag = 1;

    /* Call signal() to reestablish sig_handler
    upon receiving SIG_ERR. */

    if (signal(s0, sig_handler) == SIG_ERR)
    {
        /* Handle error */
    }
}

void func(void)
{
    if (signal(SIGINT, sig_handler) == SIG_ERR)
    {
        /* Handle error */
    }

    /* more code */
}
```

In this example, the definition of `sig_handler()` includes a call to `signal()` when the handler catches `SIG_ERR`. On Windows platforms, signal handlers are nonpersistent. This code can result in a race condition.

If your code requires the use of a persistent signal handler on a Windows platform, use a persistent signal handler after performing a thorough risk analysis.

```
#include <stdio.h>
#include <stdlib.h>
#include <signal.h>
#include <unistd.h>

volatile sig_atomic_t e_flag = 0;

void sig_handler(int signum)
{
    int s0 = signum;
```

```
    e_flag = 1;
    /* No call to signal() */
}

int main(void)
{
    if (signal(SIGINT, sig_handler) == SIG_ERR)
    {
        /* Handle error */
    }
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** SIG\_HANDLER\_CALLING\_SIGNAL

**Impact:** Medium

**CWE ID:** 387, 474

**CERT C ID:** SIG34-C

**CERT C++ ID:** SIG34-C

**ISO/IEC TS 17961 ID:** sigcall

## See Also

### Topics

Function called from signal handler not asynchronous-safe

Return from computational exception signal handler

Shared data access within signal handler

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Signal call in multithreaded program

Program with multiple threads uses `signal` function

### Description

**Signal call in multithreaded program** occurs when you use the `signal()` function in a program with multiple threads.

### Risk

According to the C11 standard (Section 7.14.1.1), use of the `signal()` function in a multithreaded program is undefined behavior.

### Fix

Depending on your intent, use other ways to perform an asynchronous action on a specific thread.

## Examples

### Use of `signal()` Function to Terminate Loop in Thread

```
#include <signal.h>
#include <stddef.h>
#include <threads.h>

volatile sig_atomic_t flag = 0;

void handler(int signum) {
    flag = 1;
}

/* Runs until user sends SIGUSR1 */
int func(void *data) {
    while (!flag) {
```

```
    /* ... */
}
return 0;
}

int main(void) {
    signal(SIGINT, handler); /* Undefined behavior */
    thrd_t tid;

    if (thrd_success != thrd_create(&tid, func, NULL)) {
        /* Handle error */
    }
    /* ... */
    return 0;
}
```

In this example, the `signal` function is used to terminate a while loop in the thread created with `thrd_create`.

One possible correction is to use an `atomic_bool` variable that multiple threads can access. In the corrected example, the child thread evaluates this variable before every loop iteration. After completing the program, you can modify this variable so that the child thread exits the loop.

```
#include <stdatomic.h>
#include <stdbool.h>
#include <stddef.h>
#include <threads.h>

atomic_bool flag = ATOMIC_VAR_INIT(false);

int func(void *data) {
    while (!flag) {
        /* ... */
    }
    return 0;
}

int main(void) {
    thrd_t tid;

    if (thrd_success != thrd_create(&tid, func, NULL)) {
```

```
    /* Handle error */  
  }  
  /* ... */  
  /* Set flag when done */  
  flag = true;  
  
  return 0;  
}
```

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SIGNAL\_USE\_IN\_MULTITHREADED\_PROGRAM

**Impact:** Low

**CERT C ID:** CON37-C

**CERT C++ ID:** CON37-C

## See Also

Function called from signal handler not asynchronous-safe | MISRA C:  
2012 Rule 21.5 | Signal call from within signal handler

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

# Standard function call with incorrect arguments

Argument to a standard function does not meet requirements for use in the function

## Description

**Standard function call with incorrect arguments** occurs when the arguments to certain standard functions do not meet the requirements for their use in the functions.

For instance, the arguments to these functions can be invalid in the following ways.

Function Type	Situation	Risk	Fix
String manipulation functions such as <code>strlen</code> and <code>strcpy</code>	The pointer arguments do not point to a NULL-terminated string.	The behavior of the function is undefined.	Pass a NULL-terminated string to string manipulation functions.
File handling functions in <code>stdio.h</code> such as <code>fputc</code> and <code>fread</code>	The FILE* pointer argument can have the value NULL.	The behavior of the function is undefined.	Test the FILE* pointer for NULL before using it as function argument.
File handling functions in <code>unistd.h</code> such as <code>lseek</code> and <code>read</code>	The file descriptor argument can be -1.	The behavior of the function is undefined.  Most implementations of the <code>open</code> function return a file descriptor value of -1. In addition, they set <code>errno</code> to indicate that an error has occurred when opening a file.	Test the return value of the <code>open</code> function for -1 before using it as argument for <code>read</code> or <code>lseek</code> .  If the return value is -1, check the value of <code>errno</code> to see which error has occurred.

Function Type	Situation	Risk	Fix
	The file descriptor argument represents a closed file descriptor.	The behavior of the function is undefined.	Close the file descriptor only after you have completely finished using it. Alternatively, reopen the file descriptor before using it as function argument.
Directory name generation functions such as <code>mkdtemp</code> and <code>mkstemp</code>	The last six characters of the string template are not <code>XXXXXX</code> .	The function replaces the last six characters with a string that makes the file name unique. If the last six characters are not <code>XXXXXX</code> , the function cannot generate a unique enough directory name.	Test if the last six characters of a string are <code>XXXXXX</code> before using the string as function argument.
Functions related to environment variables such as <code>getenv</code> and <code>setenv</code>	The string argument is <code>" "</code> .	The behavior is implementation-defined.	Test the string argument for <code>" "</code> before using it as <code>getenv</code> or <code>setenv</code> argument.
	The string argument terminates with an equal sign, <code>=</code> . For instance, <code>"C="</code> instead of <code>"C"</code> .	The behavior is implementation-defined.	Do not terminate the string argument with <code>=</code> .
String handling functions such as <code>strtok</code> and <code>strstr</code>	<ul style="list-style-type: none"> <li><code>strtok</code>: The delimiter argument is <code>" "</code>.</li> <li><code>strstr</code>: The search string argument is <code>" "</code>.</li> </ul>	Some implementations do not handle these edge cases.	Test the string for <code>" "</code> before using it as function argument.

## Examples

### NULL Pointer Passed as strlen Argument

```
#include <string.h>
#include <stdlib.h>

enum {
    SIZE10 = 10,
    SIZE20 = 20
};

int func() {
    char* s = NULL;
    return strlen(s, SIZE20);
}
```

In this example, a NULL pointer is passed as `strlen` argument instead of a NULL-terminated string.

Before running analysis on the code, specify a GNU compiler. See `Compiler (-compiler)`.

Pass a NULL-terminated string as the first argument of `strlen`.

```
#include <string.h>
#include <stdlib.h>

enum {
    SIZE10 = 10,
    SIZE20 = 20
};

int func() {
    char* s = "";
    return strlen(s, SIZE20);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** STD\_FUNC\_ARG\_MISMATCH

**Impact:** Medium

**CWE ID:** 628, 685, 686, 687, 690, 910

**CERT C ID:** EXP37-C, STR32-C, FIO46-C, API00-C, MSC15-C

**CERT C++ ID:** EXP37-C, FIO46-C, STR32-C

**ISO/IEC TS 17961 ID:** argcomp, liberr, nonnullcs

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Static uncalled function

Function with static scope not called in file

## Description

**Static uncalled function** occurs when a static function is not called in the same file where it is defined.

## Examples

### Uncalled function error

Save the following code in the file `Initialize_Value.c`

```
#include <stdlib.h>
#include <stdio.h>

static int Initialize(void)
/* Defect: Function not called */
{
    int input;
    printf("Enter an integer:");
    scanf("%d",&input);
    return(input);
}

void main()
{
    int num;

    num=0;

    printf("The value of num is %d",num);
}
```

The static function `Initialize` is not called in the file `Initialize_Value.c`.

One possible correction is to call `Initialize` at least once in the file `Initialize_Value.c`.

```
#include <stdlib.h>
#include <stdio.h>

static int Initialize(void)
{
    int input;
    printf("Enter an integer:");
    scanf("%d",&input);
    return(input);
}

void main()
{
    int num;

    /* Fix: Call static function Initialize */
    num=Initialize();

    printf("The value of num is %d",num);
}
```

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UNCALLED\_FUNC

**Impact:** Low

**CWE ID:** 561

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Stream argument with possibly unintended side effects

Stream argument side effects occur more than once

### Description

**Stream argument with possibly unintended side effects** occurs when you call `getc()`, `putc()`, `getwc()`, or `putwc()` with a stream argument that has side effects.

**Stream argument with possibly unintended side effects** considers the following as stream side effects:

- Any assignment of a variable of a stream, such as `FILE *`, or any assignment of a variable of a deeper stream type, such as an array of `FILE *`.
- Any call to a function that manipulates a stream or a deeper stream type.

The number of defects raised corresponds to the number of side effects detected. When a stream argument is evaluated multiple times in a function implemented as a macro, a defect is raised for each evaluation that has a side effect.

A defect is also raised on functions that are not implemented as macros but that can be implemented as macros on another operating system.

### Risk

If the function is implemented as an unsafe macro, the stream argument can be evaluated more than once, and the stream side effect happens multiple times. For instance, a stream argument calling `fopen()` might open the same file multiple times, which is unspecified behavior.

### Fix

To ensure that the side effect of a stream happens only once, use a separate statement for the stream argument.

## Examples

### Stream Argument of `getc()` Has Side Effect `fopen()`

```
#include <stddef.h>
#include <stdio.h>
#include <stdlib.h>

#define fatal_error() abort()

const char* myfile = "my_file.log";

void func(void)
{
    int c;
    FILE* fptr;
    /* getc() has stream argument fptr with
     * 2 side effects: call to fopen(), and assignment
     * of fptr
     */
    c = getc(fptr = fopen(myfile, "r"));
    if (c == EOF) {
        /* Handle error */
        (void)fclose(fptr);
        fatal_error();
    }
    if (fclose(fptr) == EOF) {
        /* Handle error */
        fatal_error();
    }
}

void main(void)
{
    func();
}
```

In this example, `getc()` is called with stream argument `fptr`. The stream argument has two side effects: the call to `fopen()` and the assignment of `fptr`. If `getc()` is implemented as an unsafe macro, the side effects happen multiple times.

One possible correction is to use a separate statement for `fopen()`. The call to `fopen()` and the assignment of `fptr` happen in this statement so there are no side effects when you pass `fptr` to `getc()`.

```
#include <stddef.h>
#include <stdio.h>
#include <stdlib.h>

#define fatal_error() abort()

const char* myfile = "my_file.log";

void func(void)
{
    int c;
    FILE* fptr;

    /* Separate statement for fopen()
     * before call to getc()
     */
    fptr = fopen(myfile, "r");
    if (fptr == NULL) {
        /* Handle error */
        fatal_error();
    }
    c = getc(fptr);
    if (c == EOF) {
        /* Handle error */
        (void)fclose(fptr);
        fatal_error();
    }
    if (fclose(fptr) == EOF) {
        /* Handle error */
        fatal_error();
    }
}

void main(void)
{
    func();
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** STREAM\_WITH\_SIDE\_EFFECT

**Impact:** Low

**CERT C ID:** FIO41-C

**CERT C++ ID:** FIO41-C

## See Also

### Topics

Returned value of a sensitive function not checked

Opening previously opened resource

Standard function call with incorrect arguments

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2018a

## Subtraction or comparison between pointers to different arrays

Subtraction or comparison between pointers causes undefined behavior

### Description

**Subtraction or comparison between pointers to different arrays** occurs when you subtract or compare pointers that are null or that point to elements in different arrays. The relational operators for the comparison are `>`, `<`, `>=`, and `<=`.

### Risk

When you subtract two pointers to elements in the same array, the result is the difference between the subscripts of the two array elements. Similarly, when you compare two pointers to array elements, the result is the positions of the pointers relative to each other. If the pointers are null or point to different arrays, a subtraction or comparison operation is undefined. If you use the subtraction result as a buffer index, it can cause a buffer overflow.

### Fix

Before you subtract or use relational operators to compare pointers to array elements, check that they are non-null and that they point to the same array.

## Examples

### Subtraction Between Pointers to Elements in Different Arrays

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

#define SIZE20 20
```

```
size_t func(void)
{
    int nums[SIZE20];
    int end;
    int *next_num_ptr = nums;
    size_t free_elements;
    /* Increment next_num_ptr as array fills */

    /* Subtraction operation is undefined unless array nums
    is adjacent to variable end in memory. */
    free_elements = &end - next_num_ptr;
    return free_elements;
}
```

In this example, the array `nums` is incrementally filled. Pointer subtraction is then used to determine how many free elements remain. Unless `end` points to a memory location one past the last element of `nums`, the subtraction operation is undefined.

Subtract the pointer to the last element that was filled from the pointer to the last element in the array.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

#define SIZE20 20

size_t func(void)
{
    int nums[SIZE20];
    int *next_num_ptr = nums;
    size_t free_elements;
    /* Increment next_num_ptr as array fills */

    /* Subtraction operation involves pointers to the same array. */
    free_elements = &(nums[SIZE20 - 1]) - next_num_ptr;

    return free_elements + 1;
}
```

## Result Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** PTR\_TO\_DIFF\_ARRAY

**Impact:** High

**CWE ID:** 469

**CERT C ID:** ARR36-C

**ISO/IEC TS 17961 ID:** ptrobj

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

# Tainted division operand

Division / operands from an unsecure source

## Description

**Tainted division operand** detects division operations where one or both of the integer operands is from an unsecure source.

## Risk

- If the numerator is the minimum possible value and the denominator is  $-1$ , your division operation overflows because the result cannot be represented by the current variable size.
- If the denominator is zero, your division operation fails possibly causing your program to crash.

These risks can be used to execute arbitrary code. This code is usually outside the scope of a program's implicit security policy.

## Fix

Before performing the division, validate the values of the operands. Check for denominators of  $0$  or  $-1$ , and numerators of the minimum integer value.

## Examples

### Division of Function Arguments

```
extern void print_int(int);

int taintedintdivision(int usernum, int userden) {
    int r = usernum/userden;
    print_int(r);
    return r;
}
```

This example function divides two argument variables, then prints and returns the result. The argument values are unknown and can cause division by zero or integer overflow.

One possible correction is to check the values of the numerator and denominator before performing the division.

```
#include "limits.h"

extern void print_int(int);

int taintedintdivision(int usernum, int userden) {
    int r = 0;
    if (userden!=0 && !(usernum=INT_MIN && userden==-1)) {
        r = usernum/userden;
    }
    print_int(r);
    return r;
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_INT\_DIVISION

**Impact:** Low

**CWE ID:** 189, 190, 369

**CERT C ID:** API00-C, INT32-C, INT33-C

**CERT C++ ID:** INT32-C, INT33-C

**ISO/IEC TS 17961 ID:** diverr

## See Also

Integer division by zero | Float division by zero | Tainted modulo operand

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Tainted modulo operand

Remainder % operands are from an unsecure source

### Description

**Tainted modulo operand** checks the operands of remainder % operations. Bug Finder flags modulo operations with one or more tainted operands.

### Risk

- If the second remainder operand is zero, your remainder operation fails, causing your program to crash.
- If the second remainder operand is -1, your remainder operation can overflow if the remainder operation is implemented based on the division operation that can overflow.
- If one of the operands is negative, the operation result is uncertain. For C89, the modulo operation is not standardized, so the result from negative operands is implementation-defined.

These risks can be exploited by attackers to gain access to your program or the target in general.

### Fix

Before performing the modulo operation, validate the values of the operands. Check the second operand for values of 0 and -1. Check both operands for negative values.

## Examples

### Modulo with Function Arguments

```
extern void print_int(int);

int taintedintmod(int userden) {
    int rem = 128%userden;
```

```
    print_int(rem);
    return rem;
}
```

In this example, the function performs a modulo operation by using an input argument. The argument is not checked before calculating the remainder for values that can crash the program, such as 0 and -1.

One possible correction is to check the values of the operands before performing the modulo operation. In this corrected example, the modulo operation continues only if the second operand is greater than zero.

```
extern void print_int(int);

int taintedintmod(int userden) {
    int rem = 0;
    if (userden > 0) {
        rem = 128 % userden;
    }
    print_int(rem);
    return rem;
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_INT\_MOD

**Impact:** Low

**CWE ID:** 369, 682

**CERT C ID:** API00-C, INT10-C, INT32-C, INT33-C

**CERT C++ ID:** INT32-C, INT33-C

**ISO/IEC TS 17961 ID:** diverr, intoflow

## See Also

Integer division by zero | Tainted division operand

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Tainted NULL or non-null-terminated string

Argument is from an unsecure source and may be NULL or not NULL-terminated

## Description

**Tainted NULL or non-null-terminated string** looks for strings from unsecure sources that are being used in string manipulation routines that implicitly dereference the string buffer. For example, `strcpy` or `sprintf`.

**Tainted NULL or non-null-terminated string** raises no defect for a string returned from a call to `scanf`-family variadic functions. Similarly, no defect is raised when you pass the string with a `%s` specifier to `printf`-family variadic functions.

---

**Note** If you reference a string using the form `ptr[i]`, `*ptr`, or pointer arithmetic, Bug Finder raises a **Use of tainted pointer** defect instead. The **Tainted NULL or non-null-terminated string** defect is raised only when the pointer is used as a string.

---

## Risk

If a string is from an unsecure source, it is possible that an attacker manipulated the string or pointed the string pointer to a different memory location.

If the string is NULL, the string routine cannot dereference the string, causing the program to crash. If the string is not null-terminated, the string routine might not know when the string ends. This error can cause you to write out of bounds, causing a buffer overflow.

## Fix

Validate the string before you use it. Check that:

- The string is not NULL.
- The string is null-terminated
- The size of the string matches the expected size.

## Examples

### Getting String from Input Argument

```
#include <stdio.h>
#include <string.h>
#include <stdlib.h>

#define SIZE128 128

extern void print_str(const char*);

void warningMsg(char* userstr)
{
    char str[SIZE128] = "Warning: ";
    strncat(str, userstr, SIZE128-(strlen(str)+1));
    print_str(str);
}

void errorMsg(char* userstr)
{
    char str[SIZE128] = "Error: ";
    strncat(str, userstr, SIZE128-(strlen(str)+1));
    print_str(str);
}
```

In this example, the string `str` is concatenated with the argument `userstr`. The value of `userstr` is unknown. If the size of `userstr` is greater than the space available, the concatenation overflows.

One possible correction is to check the size of `userstr` and make sure that the string is null-terminated before using it in `strncat`. This example uses a helper function, `sansitize_str`, to validate the string. The defects are concentrated in this function.

```
#include <stdio.h>
#include <string.h>
#include <stdlib.h>

#define SIZE128 128

extern void print_str(const char*);
```

```
int sanitize_str(char* s) {
    int res = 0;
    if (s && (strlen(s) > 0)) { // TAINTED_STRING only flagged here
        // - string is not null
        // - string has a positive and limited size
        // - TAINTED_STRING on strlen used as a firewall
        res = 1;
    }
    return res;
}

void warningMsg(char* userstr)
{
    char str[SIZE128] = "Warning: ";
    if (sanitize_str(userstr))
        strncat(str, userstr, SIZE128-(strlen(str)+1));
    print_str(str);
}

void errorMsg(char* userstr)
{
    char str[SIZE128] = "Error: ";
    if (sanitize_str(userstr))
        strncat(str, userstr, SIZE128-(strlen(str)+1));
    print_str(str);
}
```

Another possible correction is to call function `errorMsg` and `warningMsg` with specific strings.

```
#include <stdio.h>
#include <string.h>
#include <stdlib.h>

#define SIZE128 128

extern void print_str(const char*);

void warningMsg(char* userstr)
{
    char str[SIZE128] = "Warning: ";
    strncat(str, userstr, SIZE128-(strlen(str)+1));
    print_str(str);
}
```

```
void errorMsg(char* userstr)
{
    char str[SIZE128] = "Error: ";
    strncat(str, userstr, SIZE128-(strlen(str)+1));
    print_str(str);
}

int manageSensorValue(int sensorValue) {
    int ret = sensorValue;
    if ( sensorValue < 0 ) {
        errorMsg("sensor value should be positive");
        exit(1);
    } else if ( sensorValue > 50 ) {
        warningMsg("sensor value greater than 50 (applying threshold)...");
        sensorValue = 50;
    }

    return sensorValue;
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_STRING

**Impact:** Low

**CWE ID:** 120, 170, 476, 690, 822

**CERT C ID:** STR31-C, STR32-C, FIO17-C, ENV01-C, API00-C

**CERT C++ ID:** STR31-C, STR32-C, STR50-CPP

**ISO/IEC TS 17961 ID:** nonnullcs, taintstrcpy, taintformatio

## See Also

Tainted string format

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Tainted sign change conversion

Value from an unsecure source changes sign

### Description

**Tainted sign change conversion** looks for values from unsecure sources that are converted, implicitly or explicitly, from signed to unsigned values.

For example, functions that use `size_t` as arguments implicitly convert the argument to an unsigned integer. Some functions that implicitly convert `size_t` are:

```
bcmp  
memcpy  
memmove  
strncmp  
strncpy  
calloc  
malloc  
memalign
```

### Risk

If you convert a small negative number to unsigned, the result is a large positive number. The large positive number can create security vulnerabilities. For example, if you use the unsigned value in:

- Memory size routines — causes allocating memory issues.
- String manipulation routines — causes buffer overflow.
- Loop boundaries — causes infinite loops.

### Fix

To avoid converting unsigned negative values, check that the value being converted is within an acceptable range. For example, if the value represents a size, validate that the value is not negative and less than the maximum value size.

## Examples

### Set Memory Value with Size Argument

```
#include <stdlib.h>
#include <string.h>

enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

void bug_taintedsignchange(int size) {
    char str[SIZE128] = "";
    if (size < SIZE128) {
        memset(str, 'c', size);
    }
}
```

In this example, a char buffer is created and filled using `memset`. The size argument to `memset` is an input argument to the function.

The call to `memset` implicitly converts `size` to unsigned integer. If `size` is a large negative number, the absolute value could be too large to represent as an integer, causing a buffer overflow.

One possible correction is to check if `size` is inside the valid range. This correction checks if `size` is greater than zero and less than the buffer size before calling `memset`.

```
#include <stdlib.h>
#include <string.h>

enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

void corrected_taintedsignchange(int size) {
    char str[SIZE128] = "";
    if (size > 0 && size < SIZE128) {
```

```
        memset(str, 'c', size);
    }
}
```

### Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_SIGN\_CHANGE

**Impact:** Medium

**CWE ID:** 128, 131, 192, 194, 195

**CERT C ID:** API00-C, INT02-C, INT31-C, MEM04-C, MEM11-C, MSC21-C

**CERT C++ ID:** INT31-C

**ISO/IEC TS 17961 ID:** taintsink

### See Also

Sign change integer conversion overflow

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Tainted size of variable length array

Size of the variable-length array (VLA) is from an unsecure source and may be zero, negative, or too large

### Description

**Tainted size of variable length array** detects variable length arrays (VLA) whose size is from an unsecure source.

### Risk

If an attacker changed the size of your VLA to an unexpected value, it can cause your program to crash or behave unexpectedly.

If the size is non-positive, the behavior of the VLA is undefined. Your program does not perform as expected.

If the size is unbounded, the VLA can cause memory exhaustion or stack overflow.

### Fix

Validate your VLA size to make sure that it is positive and less than a maximum value.

## Examples

### Input Argument Used as Size of VLA

```
enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

int taintedvlasize(int size) {
```

```
int tabvla[size];
int res = 0;
for (int i=0 ; i<SIZE10 ; ++i) {
    tabvla[i] = i*i;
    res += tabvla[i];
}
return res;
}
```

In this example, a variable length array size is based on an input argument. Because this input argument value is not checked, the size may be negative or too large.

One possible correction is to check the size variable before creating the variable length array. This example checks if the size is larger than 10 and less than 100, before creating the VLA

```
enum {
    SIZE10 = 10,
    SIZE100 = 100,
    SIZE128 = 128
};

int taintedvlasize(int size) {
    int res = 0;
    if (size>SIZE10 && size<SIZE100) {
        int tabvla[size];
        for (int i=0 ; i<SIZE10 ; ++i) {
            tabvla[i] = i*i;
            res += tabvla[i];
        }
    }
    return res;
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_VLA\_SIZE

**Impact:** Medium

**CWE ID:** 128, 131, 770, 789

**CERT C ID:** API00-C, ARR32-C, INT04-C, MEM04-C, MEM05-C

**ISO/IEC TS 17961 ID:** taintsink

## **See Also**

Memory allocation with tainted size

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Tainted string format

Input format argument is from an unsecure source

### Description

**Tainted string format** detects string formatting with `printf`-style functions that contain elements from unsecure sources.

### Risk

If you use externally controlled elements to format a string, you can cause buffer overflow or data-representation problems. An attacker can use these string formatting elements to view the contents of a stack using `%x` or write to a stack using `%n`.

### Fix

Pass a static string to format string functions. This fix ensures that an external actor cannot control the string.

Another possible fix is to allow only the expected number of arguments. If possible, use functions that do not support the vulnerable `%n` operator in format strings.

## Examples

### Get Elements from User Input

```
#include "stdio.h"

void taintedstringformat(char* userstr) {
    printf(userstr);
}
```

This example prints the input argument `userstr`. The string is unknown. If it contains elements such as `%`, `printf` can interpret `userstr` as a string format instead of a string, causing your program to crash.

One possible correction is to print `userstr` explicitly as a string so that there is no ambiguity.

```
#include "stdio.h"

void taintedstringformat(char* userstr) {
    printf("%.20s", userstr);
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_STRING\_FORMAT

**Impact:** Low

**CWE ID:** 134

**CERT C ID:** API00-C, FIO30-C

**CERT C++ ID:** FIO30-C

**ISO/IEC TS 17961 ID:** usrfmt

## See Also

Tainted NULL or non-null-terminated string

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Thread-specific memory leak

Dynamically allocated thread-specific memory not freed before end of thread

### Description

**Thread-specific memory leak** occurs when you do not free thread-specific dynamically allocated memory before the end of a thread.

To create thread-specific storage, you generally do these steps:

- 1 You create a key for thread-specific storage.
- 2 You create the threads.
- 3 In each thread, you allocate storage dynamically and then associate the key with this storage.

After the association, you can read the stored data later using the key.

- 4 Before the end of the thread, you free the thread-specific memory using the key.

The checker flags execution paths in the thread where the last step is missing.

The checker works on these families of functions:

- `tss_get` and `tss_set` (C11)
- `pthread_getspecific` and `pthread_setspecific` (POSIX)

### Risk

The data stored in the memory is available to other processes even after the threads end (memory leak). Besides security vulnerabilities, memory leaks can shrink the amount of available memory and reduce performance.

### Fix

Free dynamically allocated memory before the end of a thread.

You can explicitly free dynamically allocated memory with functions such as `free`.

Alternatively, when you create a key, you can associate a destructor function with the key. The destructor function is called with the key value as argument at the end of a thread. In the body of the destructor function, you can free any memory associated with the key. If you use this method, Bug Finder still flags a defect. Ignore this defect with appropriate comments. See “Address Polyspace Results Through Bug Fixes or Comments”.

## Examples

### Memory Not Freed at End of Thread

```
#include <threads.h>
#include <stdlib.h>

/* Global key to the thread-specific storage */
tss_t key;
enum { MAX_THREADS = 3 };

int add_data(void) {
    int *data = (int *)malloc(2 * sizeof(int));
    if (data == NULL) {
        return -1; /* Report error */
    }
    data[0] = 0;
    data[1] = 1;

    if (thrd_success != tss_set(key, (void *)data)) {
        /* Handle error */
    }
    return 0;
}

void print_data(void) {
    /* Get this thread's global data from key */
    int *data = tss_get(key);

    if (data != NULL) {
        /* Print data */
    }
}

int func(void *dummy) {
```

```
    if (add_data() != 0) {
        return -1; /* Report error */
    }
    print_data();
    return 0;
}

int main(void) {
    thrd_t thread_id[MAX_THREADS];

    /* Create the key before creating the threads */
    if (thrd_success != tss_create(&key, NULL)) {
        /* Handle error */
    }

    /* Create threads that would store specific storage */
    for (size_t i = 0; i < MAX_THREADS; i++) {
        if (thrd_success != thrd_create(&thread_id[i], func, NULL)) {
            /* Handle error */
        }
    }

    for (size_t i = 0; i < MAX_THREADS; i++) {
        if (thrd_success != thrd_join(thread_id[i], NULL)) {
            /* Handle error */
        }
    }

    tss_delete(key);
    return 0;
}
```

In this example, the start function of each thread `func` calls two functions:

- `add_data`: This function allocates storage dynamically and associates the storage with a key using the `tss_set` function.
- `print_data`: This function reads the stored data using the `tss_get` function.

At the points where `func` returns, the dynamically allocated storage has not been freed.

One possible correction is to free dynamically allocated memory explicitly before leaving the start function of a thread. See the highlighted change in the corrected version.

In this corrected version, a defect still appears on the return statement in the error handling section of `func`. The defect cannot occur in practice because the error handling section is entered only if dynamic memory allocation fails. Ignore this remaining defect with appropriate comments. See “Address Polyspace Results Through Bug Fixes or Comments”.

```
#include <threads.h>
#include <stdlib.h>

/* Global key to the thread-specific storage */
tss_t key;
enum { MAX_THREADS = 3 };

int add_data(void) {
    int *data = (int *)malloc(2 * sizeof(int));
    if (data == NULL) {
        return -1; /* Report error */
    }
    data[0] = 0;
    data[1] = 1;

    if (thrd_success != tss_set(key, (void *)data)) {
        /* Handle error */
    }
    return 0;
}

void print_data(void) {
    /* Get this thread's global data from key */
    int *data = tss_get(key);

    if (data != NULL) {
        /* Print data */
    }
}

int func(void *dummy) {
    if (add_data() != 0) {
        return -1; /* Report error */
    }
    print_data();
    free(tss_get(key));
    return 0;
}
```

```
}

int main(void) {
    thrd_t thread_id[MAX_THREADS];

    /* Create the key before creating the threads */
    if (thrd_success != tss_create(&key, NULL)) {
        /* Handle error */
    }

    /* Create threads that would store specific storage */
    for (size_t i = 0; i < MAX_THREADS; i++) {
        if (thrd_success != thrd_create(&thread_id[i], func, NULL)) {
            /* Handle error */
        }
    }

    for (size_t i = 0; i < MAX_THREADS; i++) {
        if (thrd_success != thrd_join(thread_id[i], NULL)) {
            /* Handle error */
        }
    }

    tss_delete(key);
    return 0;
}
```

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** THREAD\_MEM\_LEAK

**Impact:** Medium

**CWE ID:** 401, 404

**CERT C ID:** CON30-C

**ISO/IEC TS 17961 ID:** fcloselose

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

## Too many `va_arg` calls for current argument list

Number of calls to `va_arg` exceeds number of arguments passed to variadic function

### Description

**Too many `va_arg` calls for current argument list** occurs when the number of calls to `va_arg` exceeds the number of arguments passed to the corresponding variadic function. The analysis raises a defect only when the variadic function is called.

**Too many `va_arg` calls for current argument list** does not raise a defect when:

- The number of calls to `va_arg` inside the variadic function is indeterminate. For example, if the calls are from an external source.
- The `va_list` used in `va_arg` is invalid.

### Risk

When you call `va_arg` and there is no next argument available in `va_list`, the behavior is undefined. The call to `va_arg` might corrupt data or return an unexpected result.

### Fix

Ensure that you pass the correct number of arguments to the variadic function.

## Examples

### No Argument Available When Calling `va_arg`

```
#include <stdarg.h>
#include <stddef.h>
#include <math.h>
```

```
/* variadic function defined with
 * one named argument 'count'
 */
int variadic_func(int count, ...) {
    int result = -1;
    va_list ap;
    va_start(ap, count);
    if (count > 0) {
        result = va_arg(ap, int);
        count --;
        if (count > 0) {
/* No further argument available
 * in va_list when calling va_arg
 */
            result += va_arg(ap, int);
        }
    }
    va_end(ap);
    return result;
}

void func(void) {

    (void)variadic_func(2, 100);

}
```

In this example, the named argument and only one variadic argument are passed to `variadic_func()` when it is called inside `func()`. On the second call to `va_arg`, no further variadic argument is available in `ap` and the behavior is undefined.

One possible correction is to ensure that you pass the correct number of arguments to the variadic function.

```
#include <stdarg.h>
#include <stddef.h>
#include <math.h>

/* variadic function defined with
 * one named argument 'count'
 */

int variadic_func(int count, ...) {
```

```
    int result = -1;
    va_list ap;
    va_start(ap, count);
    if (count > 0) {
        result = va_arg(ap, int);
        count --;
        if (count > 0) {

/* The correct number of arguments is
 * passed to va_list when variadic_func()
 * is called inside func()
 */
            result += va_arg(ap, int);
        }
    }
    va_end(ap);
    return result;
}

void func(void) {

    (void)variadic_func(2, 100, 200);

}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** TOO\_MANY\_VA\_ARG\_CALLS

**Impact:** Medium

**CWE ID:** 685

**CERT C ID:** EXP47-C

**CERT C++ ID:** EXP47-C

## See Also

### Topics

Invalid va\_list argument

Incorrect data type passed to va\_arg

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Typedef mismatch

Mismatch between typedef statements

### Description

**Typedef mismatch** detects typedef statements with different underlying types for these fundamental types:

- `size_t`
- `ssize_t`
- `wchar_t`
- `ptrdiff_t`

### Risk

If you change the underlying type of `size_t`, `ssize_t`, `wchar_t`, or `ptrdiff_t`, you have inconsistent definitions of the same type. Compilation units with different include paths can potentially use different-sized types causing conflicts in your program.

For example, say that you define a function in one compilation unit that redefines `size_t` as unsigned long. But in another compilation unit that uses the `size_t` definition from `<stddef.h>`, you use the same function as an extern declaration. Your program will encounter a mismatch between the function declaration and function definition.

### Fix

Use consistent type definitions. For example:

- Remove custom type definitions for these fundamental types. Only use system definitions.
- Use the same size for all compilation units. Move your typedef to a shared header file.

## Examples

### Two Definitions of size\_t

file1.c

```
typedef unsigned char size_t;

void func2()
{
    size_t var = 0;
    /*... more code ... */
}
```

file2.c

```
#include <stddef.h>

void func1()
{
    size_t var = 0;
    /*... more code ... */
}
```

In this example, Polyspace flags the definition of `size_t` in `file1.c` as a defect. This definition is a typedef mismatch because another file in your project, `file2.c`, includes `stddef.h`, which defines `size_t` as unsigned long.

One possible correction is to use the system definition of `size_t` in `stddef.h` to avoid conflicting type definitions.

file1.c

```
#include <stddef.h>

void func2()
{
    size_t var = 0;
    /*... more code ... */
}
```

file2.c

```
#include <stddef.h>

void func1()
{
    size_t var = 0;
    /*... more code ... */
}
```

One possible correction is to use a shared header file to store your type definition that gets included in both files.

```
types.h
typedef unsigned char size_t;

file1.c
#include "types.h"

void func2()
{
    size_t var = 0;
    /*... more code ... */
}

file2.c
#include "types.h"

void func1()
{
    size_t var = 0;
    /*... more code ... */
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** TYPEDEF\_MISMATCH

**Impact:** High

## **See Also**

Declaration mismatch

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

## Umask used with chmod-style arguments

Argument to umask allows external user too much control

### Description

**Umask used with chmod-style arguments** checks for umask commands that have an argument specified in the style of arguments to chmod.

For new files, the umask value specifies which permissions *not* to set, in other words which permissions to remove. The umask argument is bitwise-negated and then applied to new file permissions.

In contrast, chmod sets the permissions as you specify them.

### Risk

If you use chmod-style arguments, you specify opposite permissions of what you want. This mistake can give external users unintended read/write access to new files and folders.

### Fix

Set the umask so that the user (u) has fewer permissions turned off than the group (g). Set umask so that the group has fewer permissions turned off than other users (o), or u <= g <= o.

You can see the umask value by calling,

```
umask
```

or the symbolic value by calling,

```
umask -S
```

## Examples

### Setting the Default Mask

```
#include <stdio.h>
#include <assert.h>
#include <sys/types.h>
#include <sys/stat.h>

typedef mode_t (*umask_func)(mode_t);

const mode_t default_mode = (
    S_IRUSR /* 00400 */
    | S_IWUSR /* 00200 */
    | S_IRGRP /* 00040 */
    | S_IWGRP /* 00020 */
    | S_IROTH /* 00004 */
    | S_IWOTH /* 00002 */
); /* 00666 (i.e. -rw-rw-rw-) */

static void my_umask(mode_t mode)
{
    umask(mode);
}

int umask_use(mode_t m)
{
    my_umask(default_mode);
    return 0;
}
```

This example uses a function called `my_umask` to set the default mask mode. However, the `default_mode` variable gives the permissions 666 or `-rw-rw-rw`. `umask` negates this value. However, this negation means the default mask mode turns off read/write permissions for the user, group users, and other outside users.

One possible correction is to negate the `default_mode` argument to `my_umask`. This correction nullifies the negation `umask` for new files.

```
#include <stdio.h>
#include <assert.h>
#include <sys/types.h>
```

```
#include <sys/stat.h>

typedef mode_t (*umask_func)(mode_t);

const mode_t default_mode = (
    S_IRUSR /* 00400 */
    | S_IWUSR /* 00200 */
    | S_IRGRP /* 00040 */
    | S_IWGRP /* 00020 */
    | S_IROTH /* 00004 */
    | S_IWOTH /* 00002 */
); /* 00666 (i.e. -rw-rw-rw-) */

static void my_umask(mode_t mode)
{
    umask(mode);
}

int umask_use(mode_t m)
{
    my_umask(~default_mode);
    return 0;
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BAD\_UMASK

**Impact:** Low

**CWE ID:** 560, 922

**CERT C ID:** FIO06-C

## See Also

Vulnerable permission assignments

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## **External Websites**

umask — Linux Manual Page

**Introduced in R2015b**

## Uncleared sensitive data in stack

Variable in stack is not cleared and contains sensitive data

### Description

**Uncleared sensitive data in stack** detects static memory containing sensitive data. If you do not clear the sensitive data from your stack before exiting the function or program, Bug Finder raises a defect on the last curly brace.

### Risk

Leaving sensitive information in your stack, such as passwords or user information, allows an attacker additional access to the information after your program has ended.

### Fix

Before exiting a function or program, clear out the memory zones that contain sensitive data by using `memset` or `SecureZeroMemory`.

## Examples

### Static Buffer of Password Information

```
#include <unistd.h>
#include <sys/types.h>
#include <pwd.h>

void bug_sensitivestacknotcleared(const char * my_user) {
    struct passwd* result, pwd;
    long bufsize = sysconf(_SC_GETPW_R_SIZE_MAX);
    char buf[1024] = "";
    getpwnam_r(my_user, &pwd, buf, bufsize, &result);
}
```

In this example, a static buffer is filled with password information. The program frees the stack memory at the end of the program. However, the data is still accessible from the memory.

One possible correction is to write over the memory before exiting the function. This example uses `memset` to clear the data from the buffer memory.

```
#include <unistd.h>
#include <string.h>
#include <sys/types.h>
#include <pwd.h>
#include <assert.h>

#define isNull(arr) for(int i=0; i<(sizeof(arr)/sizeof(arr[0])); i++) assert(arr[i]==0)

void corrected_sensitivestacknotcleared(const char * my_user) {
    struct passwd* result, pwd;
    long bufsize = sysconf(_SC_GETPW_R_SIZE_MAX);
    char buf[1024] = "";
    getpwnam_r(my_user, &pwd, buf, bufsize, &result);
    memset(buf, 0, (size_t)1024);
    isNull(buf);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SENSITIVE\_STACK\_NOT\_CLEARED

**Impact:** Medium

**CWE ID:** 226, 312, 316

**CERT C ID:** MEM03-C, MSC18-C

## See Also

Sensitive heap memory not cleared before release | Sensitive data printed out

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Universal character name from token concatenation

You create a universal character name by joining tokens with `##` operator

## Description

**Universal character name from token concatenation** occurs when two preprocessing tokens joined with a `##` operator create a universal character name. A universal character name begins with `\u` or `\U` followed by hexadecimal digits. It represents a character not found in the basic character set.

For instance, you form the character `\u0401` by joining two tokens:

```
#define assign(uc1, uc2, val) uc1##uc2 = val
...
assign(\u04, 01, 4);
```

## Risk

The C11 Standard (Sec. 5.1.1.2) states that if a universal character name is formed by token concatenation, the behavior is undefined.

## Fix

Use the universal character name directly instead of producing it through token concatenation.

## Examples

### Universal Character Name from Token Concatenation

```
#define assign(uc1, uc2, val) uc1##uc2 = val

int func(void) {
```

```
int \u0401 = 0;
assign(\u04, 01, 4);
return \u0401;
}
```

In this example, the `assign` macro, when expanded, joins the two tokens `\u04` and `01` to form the universal character name `\u0401`.

One possible correction is to use the universal character name `\u0401` directly. The correction redefines the `assign` macro so that it does not join tokens.

```
#define assign(ucn, val) ucn = val

int func(void) {
    int \u0401 = 0;
    assign(\u0401, 4);
    return \u0401;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `PRE_UCNAME_JOIN_TOKENS`

**Impact:** Low

**CERT C ID:** PRE30-C

**CERT C++ ID:** PRE30-C

## See Also

MISRA C:2012 Rule 20.10

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

# Unprotected dynamic memory allocation

Pointer returned from dynamic allocation not checked for NULL value

## Description

**Unprotected dynamic memory allocation** occurs when the code does not check whether or not the dynamic memory allocation succeeded.

When memory is dynamically allocated using `malloc`, `calloc`, or `realloc`, it returns a value `NULL` if the requested memory is not available. If the code following the allocation accesses the memory block without checking for the `NULL` value, this access is not protected from failures.

## Examples

### Unprotected dynamic memory allocation error

```
#include <stdlib.h>

void Assign_Value(void)
{
    int* p = (int*)calloc(5, sizeof(int));

    *p = 2;
    /* Defect: p is not checked for NULL value */

    free(p);
}
```

If the memory allocation fails, the function `calloc` returns `NULL` to `p`. Before accessing the memory through `p`, the code does not check whether `p` is `NULL`.

One possible correction is to check whether `p` has value `NULL` before dereference.

```
#include <stdlib.h>
```

```
void Assign_Value(void)
{
    int* p = (int*)calloc(5, sizeof(int));

    /* Fix: Check if p is NULL */
    if(p!=NULL) *p = 2;

    free(p);
}
```

### Check Information

**Group:** Dynamic memory

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UNPROTECTED\_MEMORY\_ALLOCATION

**Impact:** Low

**CWE ID:** 253, 690, 789

**CERT C ID:** MEM10-C, MEM11-C, ERR33-C

**CERT C++ ID:** ERR33-C, MEM52-CPP

**ISO/IEC TS 17961 ID:** liberr

### See Also

Find defects (-checkers)

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Unreachable code

Code not executed because of preceding control-flow statements

## Description

**Unreachable code** defects occur on code which cannot be reached because of the preceding code.

Statements such as `break`, `goto`, and `return`, move the flow of the program to another section or function. Because of this flow escape, the statements following the control-flow code, statistically, do not execute, and therefore the statements are unreachable.

This check also finds code following trivial infinite loops, such as `while(1)`. These types of loops only release the flow of the program by exiting the program. This type of exit causes code after the infinite loop to be unreachable.

## Examples

### Unreachable Code After Return

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void guess(suit s);

suit deal(void){
    suit card = nextcard();
    if( (card < SPADES) || (card > CLUBS) )
        card = UNKNOWN_SUIT;
    return card;

    if (card < HEARTS) {
        guess(card);
    }
    return card;
}
```

In this example, there are missing braces and misleading indentation. The first return statement changes the flow of code back to where the function was called. Because of this return statement, the if-block and second return statement do not execute.

If you correct the indentation and the braces, the error becomes clearer.

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void guess(suit s);

suit deal(void){
    suit card = nextcard();
    if( (card < SPADES) || (card > CLUBS) ){
        card = UNKNOWN_SUIT;
    }
    return card;

    if (card < HEARTS) {
        guess(card);
    }
    return card;
}
```

One possible correction is to remove the escape statement. In this example, remove the first return statement to reach the final if statement.

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void guess(suit s);

suit deal(void){
    suit card = nextcard();
    if( (card < SPADES) || (card > CLUBS) )
    {
        card = UNKNOWN_SUIT;
    }

    if(card < HEARTS)
    {
        guess(card);
    }
    return card;
}
```

Another possible correction is to remove the unreachable code if you do not need it. Because the function does not reach the second `if`-statement, removing it simplifies the code and does not change the program behavior.

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void guess(suit s);

suit deal(void){
    suit card = nextcard();
    if( (card < SPADES) || (card > CLUBS) )
    {
        card = UNKNOWN_SUIT;
    }
    return card;
}
```

## Infinite Loop Causing Unreachable Code

```
int add_apples(int apple) {
    int count = 1;
    while(1) {
        if(apple < 99){
            apple++;
            count++;
        }else{
            count--;
        }
    }
    return count;
}
```

In this example, the `while(1)` statement creates an infinite loop. The `return count` statement following this infinite loop is unreachable because the only way to exit this infinite loop is to exit the program.

One possible correction is to change the loop condition to make the `while` loop finite. In the example correction here, the loop uses the statement from the `if` condition: `apple < 99`.

```
int add_apples1(int apple) {
    int count = 0;
```

```
while(apple < 99) {
    apple++;
    count++;
}
if(count == 0)
    count = -1;
return count;
}
```

Another possible correction is to add a break from the infinite loop, so there is a possibility of reaching code after the infinite loop. In this example, a break is added to the else block making the return count statement reachable.

```
int add_apples(int apple) {
    int count = 1;
    while(1) {
        if(apple < 99)
        {
            apple++;
            count++;
        }else{
            count--;
            break;
        }
    }
    return count;
}
```

Another possible correction is to remove the unreachable code. This correction cleans up the code and makes it easier to review and maintain. In this example, remove the return statement and change the function return type to void.

```
void add_apples(int apple) {
    int count = 1;
    while(1) {
        if(apple < 99)
        {
            apple++;
            count++;
        }else{
            count--;
        }
    }
}
```

```
    }  
}
```

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** UNREACHABLE

**Impact:** Medium

**CWE ID:** 561

**CERT C ID:** MSC01-C, MSC07-C, MSC12-C

**ISO/IEC TS 17961 ID:** swtchdflt

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Code deactivated by constant false condition | Dead code | Useless if

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2013b

## Unreliable cast of function pointer

Function pointer cast to another function pointer with different argument or return type

### Description

**Unreliable cast of function pointer** occurs when a function pointer is cast to another function pointer that has different argument or return type.

This defect applies only if the code language for the project is C.

### Examples

#### Unreliable cast of function pointer error

```
#include <stdio.h>
#include <math.h>
#include <stdio.h>
#define PI 3.142

double Calculate_Sum(int (*fptr)(double))
{
    double sum = 0.0;
    double y;

    for (int i = 0; i <= 100; i++)
    {
        y = (*fptr)(i*PI/100);
        sum += y;
    }
    return sum / 100;
}

int main(void)
{
    double (*fp)(double);
    double sum;
```

```

    fp = sin;
    sum = Calculate_Sum(fp);
    /* Defect: fp implicitly cast to int(*) (double) */

    printf("sum(sin): %f\n", sum);
    return 0;
}

```

The function pointer `fp` is declared as `double (*)(double)`. However in passing it to function `Calculate_Sum`, `fp` is implicitly cast to `int (*)(double)`.

One possible correction is to check that the function pointer in the definition of `Calculate_Sum` has the same argument and return type as `fp`. This step makes sure that `fp` is not implicitly cast to a different argument or return type.

```

#include <stdio.h>
#include <math.h>
#include <stdio.h>
# define PI 3.142

/*Fix: fptr has same argument and return type everywhere*/
double Calculate_Sum(double (*fptr)(double))
{
    double sum = 0.0;
    double y;

    for (int i = 0; i <= 100; i++)
    {
        y = (*fptr)(i*PI/100);
        sum += y;
    }
    return sum / 100;
}

int main(void)
{
    double (*fp)(double);
    double sum;

    fp = sin;
    sum = Calculate_Sum(fp);
    printf("sum(sin): %f\n", sum);
}

```

```
    return 0;  
}
```

### Check Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** FUNC\_CAST

**Impact:** Medium

**CERT C ID:** EXP37-C, MSC15-C

**CERT C++ ID:** EXP37-C

**ISO/IEC TS 17961 ID:** argcomptaintnoproto

### See Also

#### Polyspace Analysis Options

Find defects (-checkers)

#### Polyspace Results

Unreliable cast of pointer

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

#### Introduced in R2013b

# Unreliable cast of pointer

Pointer implicitly cast to different data type

## Description

**Unreliable cast of pointer** occurs when a pointer is implicitly cast to a data type different from its declaration type. Such an implicit casting can take place, for instance, when a pointer to data type `char` is assigned the address of an integer.

This defect applies only if the code language for the project is C.

## Examples

### Unreliable cast of pointer error

```
#include <string.h>

void Copy_Integer_To_String()
{
    int src[]={1,2,3,4,5,6,7,8,9,10};
    char buffer[]="Buffer_Text";
    strcpy(buffer,src);
    /* Defect: Implicit cast of (int*) to (char*) */
}
```

`src` is declared as an `int*` pointer. The `strcpy` statement, while copying to `buffer`, implicitly casts `src` to `char*`.

One possible correction is to declare the pointer `src` with the same data type as `buffer`.

```
#include <string.h>
void Copy_Integer_To_String()
{
    /* Fix: Declare src with same type as buffer */
    char *src[10]={"1","2","3","4","5","6","7","8","9","10"};
    char *buffer[10];
```

```
for(int i=0;i<10;i++)
    buffer[i]="Buffer_Text";

for(int i=0;i<10;i++)
    buffer[i]= src[i];
}
```

### Check Information

**Group:** Static memory

**Language:** C

**Default:** On

**Command-Line Syntax:** PTR\_CAST

**Impact:** Medium

**CWE ID:** 135, 704, 843

**CERT C ID:** EXP36-C, EXP39-C, MSC15-C, STR38-C

**CERT C++ ID:** EXP36-C, EXP39-C, STR38-C

**ISO/IEC TS 17961 ID:** alignconv, ptrcomp

### See Also

#### Polyspace Analysis Options

Find defects (-checkers)

#### Polyspace Results

Unreliable cast of function pointer

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

#### Introduced in R2013b

# Unsafe call to a system function

Unsanitized command argument has exploitable vulnerabilities

## Description

**Unsafe call to a system function** occurs when you use a function that invokes an implementation-defined command processor. These functions include:

- The C standard `system()` function.
- The POSIX `popen()` function.
- The Windows `_popen()` and `_wopen()` functions.

## Risk

If the argument of a function that invokes a command processor is not sanitized, it can cause exploitable vulnerabilities. An attacker can execute arbitrary commands or read and modify data anywhere on the system.

## Fix

Do not use a `system`-family function to invoke a command processor. Instead, use safer functions such as POSIX `execve()` and WinAPI `CreateProcess()`.

## Examples

### `system()` Called

```
# include <string.h>
# include <stdlib.h>
# include <stdio.h>
# include <unistd.h>

enum {
    SIZE512=512,
```

```
SIZE3=3};

void func(char *arg)
{
    char buf[SIZE512];
    int retval=sprintf(buf, "/usr/bin/any_cmd %s", arg);

    if (retval<=0 || retval>SIZE512){
        /* Handle error */
        abort();
    }
    /* Use of system() to pass any_cmd with
    unsanitized argument to command processor */

    if (system(buf) == -1) {
        /* Handle error */
    }
}
```

In this example, `system()` passes its argument to the host environment for the command processor to execute. This code is vulnerable to an attack by command-injection.

In the following code, the argument of `any_cmd` is sanitized, and then passed to `execve()` for execution. `exec-family` functions are not vulnerable to command-injection attacks.

```
# include <string.h>
# include <stdlib.h>
# include <stdio.h>
# include <unistd.h>

enum {
SIZE512=512,
SIZE3=3};

void func(char *arg)
{
    char *const args[SIZE3] = {"any_cmd", arg, NULL};
    char *const env[] = {NULL};

    /* Sanitize argument */

    /* Use execve() to execute any_cmd. */
```

```
    if (execve("/usr/bin/time", args, env) == -1) {  
        /* Handle error */  
    }  
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UNSAFE\_SYSTEM\_CALL

**Impact:** High

**CWE ID:** 78, 88

**CERT C ID:** ENV33-C

**CERT C++ ID:** ENV33-C

**ISO/IEC TS 17961 ID:** syscall

## See Also

Command executed from externally controlled path | Execution of externally controlled command

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Unsafe conversion between pointer and integer

Misaligned or invalid results from conversions between pointer and integer types

### Description

**Unsafe conversion between pointer and integer** checks for pointer to integer and integer to pointers conversions. If you convert between a pointer, `intptr_t`, or `uintprt_t` and an integer type, such as `enum`, `ptrdiff_t`, or `pid_t`, Polyspace raises a defect.

### Risk

The mapping between pointers and integers is not always consistent with the addressing structure of the environment.

Converting from pointers to integers can create:

- Truncated or out of range integer values.
- Invalid integer types.

Converting from integers to pointers can create:

- Misaligned pointers or misaligned objects.
- Invalid pointer addresses.

### Fix

Where possible, avoid pointer-to-integer or integer-to-pointer conversions. If you want to convert a `void` pointer to an integer, so that you do not change the value, use types:

- C99 — `intptr_t` or `uintptr_t`
- C90 — `size_t` or `ssize_t`

## Examples

### Integer to Pointer Conversions

```
unsigned int *badintptrcast(void)
{
    unsigned int *ptr0 = (unsigned int *)0xdeadbeef;
    char *ptr1 = (char *)0xdeadbeef;
    return (unsigned int *)(ptr0 - (unsigned int *)ptr1);
}
```

In this example, there are three conversions, two unsafe conversions and one safe conversion. The first conversion of `0xdeadbeef` to `unsigned int*` causes alignment issues for the pointer. The second conversion of `0xdeadbeef` to `char *` is safe because there are no alignment issues for `char`. The third conversion in the return casts `ptrdiff_t` to a pointer. This pointer might or might not point to an invalid address.

One possible correction is to use `intptr_t` types to store the pointer address `0xdeadbeef`. Also, you can change the second pointer to an integer offset so that there is no longer a conversion from `ptrdiff_t` to a pointer.

```
#include <stdint.h>

unsigned int *badintptrcast(void)
{
    intptr_t iptr0 = (intptr_t)0xdeadbeef;
    int offset = 0;
    return (unsigned int *)(iptr0 - offset);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BAD\_INT\_PTR\_CAST

**Impact:** Medium

**CWE ID:** 465, 466, 587, 758

**CERT C ID:** INT36-C

**CERT C++ ID:** INT36-C  
**ISO/IEC TS 17961 ID:** intptrconv

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

# Unsafe conversion from string to numerical value

String to number conversion without validation checks

## Description

**Unsafe conversion from string to numerical value** detects conversions from strings to integer or floating-point values. If your conversion method does not include robust error handling, a defect is raised.

## Risk

Converting a string to numerical value can cause data loss or misinterpretation. Without validation of the conversion or error handling, your program continues with invalid values.

## Fix

- Add additional checks to validate the numerical value.
- Use a more robust string-to-numeric conversion function such as `strtol`, `strtoll`, `strtoul`, or `strtoull`.

## Examples

### Conversion With `atoi`

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

static int demo_check_string_not_empty(char *s)
{
    if (s != NULL)
```

```
        return strlen(s) > 0; /* check string null-terminated and not empty */
    else
        return 0;
}

int unsafestrtonumeric(char* argv1)
{
    int s = 0;
    if (demo_check_string_not_empty(argv1))
    {
        s = atoi(argv1);
    }
    return s;
}
```

In this example, `argv1` is converted to an integer with `atoi`. `atoi` does not provide errors for an invalid integer string. The conversion can fail unexpectedly.

One possible correction is to use `strtol` to validate the input string and the converted integer.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <limits.h>
#include <errno.h>

static int demo_check_string_not_empty(char *s)
{
    if (s != NULL)
        return strlen(s) > 0; /* check string null-terminated and not empty */
    else
        return 0;
}

int unsafestrtonumeric(char *argv1)
{
    char *c_str = argv1;
    char *end;
    long sl;

    if (demo_check_string_not_empty(c_str))
    {
        errno = 0; /* set errno for error check */
    }
}
```

```
    sl = strtol(c_str, &end, 10);
    if (end == c_str)
    {
        (void)fprintf(stderr, "%s: not a decimal number\n", c_str);
    }
    else if ('\0' != *end)
    {
        (void)fprintf(stderr, "%s: extra characters: %s\n", c_str, end);
    }
    else if ((LONG_MIN == sl || LONG_MAX == sl) && ERANGE == errno)
    {
        (void)fprintf(stderr, "%s out of range of type long\n", c_str);
    }
    else if (sl > INT_MAX)
    {
        (void)fprintf(stderr, "%ld greater than INT_MAX\n", sl);
    }
    else if (sl < INT_MIN)
    {
        (void)fprintf(stderr, "%ld less than INT_MIN\n", sl);
    }
    else
    {
        return (int)sl;
    }
}
return 0;
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UNSAFE\_STR\_TO\_NUMERIC

**Impact:** Low

**CWE ID:** 20, 253, 676

**CERT C ID:** ERR34-C

**CERT C++ ID:** ERR34-C

## **See Also**

### **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

# Unsafe standard encryption function

Function is not reentrant or uses a risky encryption algorithm

## Description

**Unsafe standard encryption function** detects use of functions with a broken or weak cryptographic algorithm. For example, `crypt` is not reentrant and is based on the risky Data Encryption Standard (DES).

## Risk

The use of a broken, weak, or nonstandard algorithm can expose sensitive information to an attacker. A determined hacker can access the protected data using various techniques.

If the weak function is nonreentrant, when you use the function in concurrent programs, there is an additional race condition risk.

## Fix

Avoid functions that use these encryption algorithms. Instead, use a reentrant function that uses a stronger encryption algorithm.

---

**Note** Some implementations of `crypt` support additional, possibly more secure, encryption algorithms.

---

## Examples

### Decrypting Password Using `crypt`

```
#define _GNU_SOURCE
#include <pwd.h>
#include <string.h>
#include <crypt.h>
```

```
volatile int rd = 1;

const char *salt = NULL;
struct crypt_data input, output;

int verific_pwd(const char *pwd, const char *cipher_pwd, int safe)
{
    int r = 0;
    char *decrypted_pwd = NULL;

    switch(safe)
    {
        case 1:
            decrypted_pwd = crypt_r(pwd, cipher_pwd, &output);
            break;

        case 2:
            decrypted_pwd = crypt_r(pwd, cipher_pwd, &output);
            break;

        default:
            decrypted_pwd = crypt(pwd, cipher_pwd);
            break;
    }

    r = (strcmp(cipher_pwd, decrypted_pwd) == 0);

    return r;
}
```

In this example, `crypt_r` and `crypt` decrypt a password. However, `crypt` is nonreentrant and uses the unsafe Data Encryption Standard algorithm.

One possible correction is to replace `crypt` with `crypt_r`.

```
#define _GNU_SOURCE
#include <pwd.h>
#include <string.h>
#include <crypt.h>

volatile int rd = 1;

const char *salt = NULL;
```

```
struct crypt_data input, output;

int verif_pwd(const char *pwd, const char *cipher_pwd, int safe)
{
    int r = 0;
    char *decrypted_pwd = NULL;

    switch(safe)
    {
        case 1:
            decrypted_pwd = crypt_r(pwd, cipher_pwd, &output);
            break;

        case 2:
            decrypted_pwd = crypt_r(pwd, cipher_pwd, &output);
            break;

        default:
            decrypted_pwd = crypt_r(pwd, cipher_pwd, &output);
            break;
    }

    r = (strcmp(cipher_pwd, decrypted_pwd) == 0);

    return r;
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UNSAFE\_STD\_CRYPT

**Impact:** Medium

**CWE ID:** 327, 522, 663

**CERT C ID:** MSC18-C

## See Also

Deterministic random output from constant seed | Predictable random output from predictable seed | Vulnerable pseudo-random number generator

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Unsafe standard function

Function unsafe for security-related purposes

## Description

**Unsafe standard function** looks for functions that are unsafe and must not be used for security-related programming. Functions can be unsafe for many reasons. Some functions are unsafe because they are nonreentrant. Other functions change depending on the target or platform, making some implementations unsafe.

## Risk

Some unsafe functions are not reentrant, meaning that the contents of the function are not locked during a call. So, an attacker can change the values midstream.

`getlogin` specifically can be unsafe depending on the implementation. Some implementations of `getlogin` return only the first eight characters of a log-in name. An attacker can use a different login with the same first eight characters to gain entry and manipulate the program.

## Fix

Avoid unsafe functions for security-related purposes. If you cannot avoid unsafe functions, use a safer version of the function instead. For `getlogin`, use `getlogin_r`.

## Examples

### Using `getlogin`

```
#include <stdio.h>
#include <unistd.h>
#include <sys/types.h>
#include <pwd.h>
#include <string.h>
```

```
#include <stdlib.h>

volatile int rd = 1;

int login_name_check(char *user)
{
    int r = -2;
    char *name = getlogin();
    if (name != NULL)
    {
        if (strcmp(name, user) == 0)
        {
            r = 0;
        }
        else
            r = -1;
    }

    return r;
}
```

This example uses `getlogin` to compare the user name of the current user to the given user name. However, `getlogin` can return something other than the current user name because a parallel process can change the string.

One possible correction is to use `getlogin_r` instead of `getlogin`. `getlogin_r` is reentrant, so you can trust the result.

```
#define _POSIX_C_SOURCE 199506L // use of getlogin_r
#include <stdio.h>
#include <unistd.h>
#include <sys/types.h>
#include <pwd.h>
#include <string.h>
#include <stdlib.h>

volatile int rd = 1;

enum { NAME_MAX_SIZE=64 };

int login_name_check(char *user)
{
```

```
int r;
char name[NAME_MAX_SIZE];

if (getlogin_r(name, sizeof(name)) == 0)
{
    if ((strlen(user) < sizeof(name)) &&
        (strncmp(name, user, strlen(user)) == 0))
    {
        r = 0;
    }
    else
        r = -1;
}
else
    r = -2;
return r;
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UNSAFE\_STD\_FUNC

**Impact:** Medium

**CWE ID:** 558, 663

## See Also

Use of obsolete standard function | Use of dangerous standard function  
| Invalid use of standard library string routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Unsigned integer constant overflow

Constant value falls outside range of unsigned integer data type

### Description

**Unsigned integer constant overflow** occurs when you assign a compile-time constant to a unsigned integer variable whose data type cannot accommodate the value. An n-bit unsigned integer holds values in the range  $[0, 2^n - 1]$ .

For instance, c is an 8-bit unsigned char variable that cannot hold the value 256.

```
unsigned char c = 256;
```

To determine the sizes of fundamental types, Bug Finder uses your specification for Target processor type (-target).

### Risk

The C standard states that overflowing unsigned integers must be wrapped around (see, for instance, the C11 standard, section 6.2.5). However, the wrap-around behavior can be unintended and cause unexpected results.

### Fix

Check if the constant value is what you intended. If the value is correct, use a wider data type for the variable.

## Examples

### Overflowing Constant from Macro Expansion

```
#define MAX_UNSIGNED_CHAR 255
#define MAX_UNSIGNED_SHORT 65535

void main() {
```

```
    unsigned char c1 = MAX_UNSIGNED_CHAR + 1;
    unsigned short c2 = MAX_UNSIGNED_SHORT + 1;
}
```

In this example, the defect appears on the macros because at least one use of the macro causes an overflow.

One possible correction is to use a wider data type for the variables that overflow.

```
#define MAX_UNSIGNED_CHAR 255
#define MAX_UNSIGNED_SHORT 65535

void main() {
    unsigned short c1 = MAX_UNSIGNED_CHAR + 1;
    unsigned int c2 = MAX_UNSIGNED_SHORT + 1;
}
```

## Result Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UINT\_CONSTANT\_OVFL

**Impact:** Low

**CWE ID:** 128, 189, 190, 191

**CERT C ID:** INT18-C, INT30-C

**CERT C++ ID:** INT30-C

## See Also

[Integer constant overflow](#) | [Integer conversion overflow](#) | [Integer overflow](#) | [Sign change integer conversion overflow](#) | [Unsigned integer conversion overflow](#) | [Unsigned integer overflow](#)

## Topics

[“Interpret Polyspace Bug Finder Results”](#)

[“Address Polyspace Results Through Bug Fixes or Comments”](#)

**Introduced in R2018b**

## Unsigned integer conversion overflow

Overflow when converting between unsigned integer types

### Description

**Unsigned integer conversion overflow** occurs when converting an unsigned integer to a smaller unsigned integer type. If the variable does not have enough bytes to represent the original constant, the conversion overflows.

The exact storage allocation for different integer types depends on your processor. See Target processor type (-target).

### Examples

#### Converting from `int` to `char`

```
unsigned char convert(void) {  
    unsigned int unum = 1000000U;  
  
    return (unsigned char)unum;  
}
```

In the return statement, the unsigned integer variable `unum` is converted to an unsigned character type. However, the conversion overflows because 1000000 requires at least 20 bits. The C programming language standard does not view unsigned overflow as an error because the program automatically reduces the result by modulo the maximum value plus 1. In this example, `unum` is reduced by modulo  $2^8$  because a character data type can only represent  $2^8 - 1$ .

One possible correction is to convert to a different integer type that can represent the entire number. For example, `long`.

```
unsigned long convert(void) {  
    unsigned int unum = 1000000U;
```

```
    return (unsigned long)unum;  
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** UINT\_CONV\_OVFL

**Impact:** Low

**CWE ID:** 128, 131, 189, 190, 191, 192, 197

**CERT C ID:** FIO37-C, FLP34-C, INT02-C, INT18-C, INT31-C

**CERT C++ ID:** FIO37-C, FLP34-C, INT31-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Float conversion overflow | Integer conversion overflow | Sign change  
integer conversion overflow

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

### Introduced in R2013b

## Unsigned integer overflow

Overflow from operation between unsigned integers

### Description

**Unsigned integer overflow** occurs when an operation on unsigned integer variables can result in values that cannot be represented by the result data type. The data type of a variable determines the number of bytes allocated for the variable storage and constrains the range of allowed values.

The exact storage allocation for different integer types depends on your processor. See Target processor type (-target).

### Examples

#### Add One to Maximum Unsigned Integer

```
#include <limits.h>

unsigned int plusplus(void) {
    unsigned uvar = UINT_MAX;
    uvar++;
    return uvar;
}
```

In the third statement of this function, the variable `uvar` is increased by 1. However, the value of `uvar` is the maximum unsigned integer value, so 1 plus the maximum integer value cannot be represented by an `unsigned int`. The C programming language standard does not view unsigned overflow as an error because the program automatically reduces the result by modulo the maximum value plus 1. In this example, `uvar` is reduced by modulo `UINT_MAX`. The result is `uvar = 1`.

One possible correction is to store the operation result in a larger data type. In this example, by returning an unsigned long long instead of an unsigned int, the overflow error is fixed.

```
#include <limits.h>

unsigned long long plusplus(void) {

    unsigned long long ullvar = UINT_MAX;
    ullvar++;
    return ullvar;
}
```

## Check Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UINT\_OVFL

**Impact:** Low

**CWE ID:** 128, 131, 189, 190, 191, 192

**CERT C ID:** FIO37-C, INT18-C, INT30-C

**CERT C++ ID:** FIO37-C, INT30-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Integer overflow | Float overflow

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Unused parameter

Function prototype has parameters not read or written in function body

## Description

**Unused parameter** occurs when a function parameter is neither read nor written in the function body.

## Risk

Unused function parameters cause the following issues:

- Indicate that the code is possibly incomplete. The parameter is possibly intended for an operation that you forgot to code.
- If the copied objects are large, redundant copies can slow down performance.

## Fix

Determine if you intend to use the parameters. Otherwise, remove parameters that you do not use in the function body.

You can intentionally have unused parameters. For instance, you have parameters that you intend to use later when you add enhancements to the function. Add a code comment indicating your intention for later use. The code comment helps you or a code reviewer understand why your function has unused parameters.

Alternatively, add a statement such as `(void)var;` in the function body. `var` is the unused parameter. You can define a macro that expands to this statement and add the macro to the function body.

## Examples

### Unused Parameter

```
void func(int* xptr, int* yptr, int flag) {
    if(flag==1) {
        *xptr=0;
    }
    else {
        *xptr=1;
    }
}

int main() {
    int x,y;
    func(&x,&y,1);
    return 0;
}
```

In this example, the parameter `yptr` is not used in the body of `func`.

One possible correction is to check if you intended to use the parameter. Fix your code if you intended to use the parameter.

```
void func(int* xptr, int* yptr, int flag) {
    if(flag==1) {
        *xptr=0;
        *yptr=1;
    }
    else {
        *xptr=1;
        *yptr=0;
    }
}

int main() {
    int x,y;
    func(&x,&y,1);
    return 0;
}
```

Another possible correction is to explicitly indicate that you are aware of the unused parameter.

```
#define UNUSED(x) (void)x

void func(int* xptr, int* yptr, int flag) {
    UNUSED(yptr);
    if(flag==1) {
        *xptr=0;
    }
    else {
        *xptr=1;
    }
}

int main() {
    int x,y;
    func(&x,&y,1);
    return 0;
}
```

## Result Information

**Group:** Good practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** UNUSED\_PARAMETER

**Impact:** Low

**CERT C ID:** MSC13-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Useless if

Unnecessary if conditional

## Description

**Useless if** occurs on if-statements where the condition is always true. This defect occurs only on if-statements that do not have an else-statement.

This defect shows unnecessary if-statements when there is no difference in code execution if the if-statement is removed.

## Examples

### if with Enumerated Type

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void do_something(suit s);

void bridge(void)
{
    suit card = nextcard();
    if ((card < SPADES) || (card > CLUBS)){
        card = UNKNOWN_SUIT;
    }

    if (card < 7) {
        do_something(card);
    }
}
```

The type `suit` is enumerated with five options. However, the conditional expression `card < 7` always evaluates to true because `card` can be at most 5. The `if` statement is unnecessary.

One possible correction is to change the if-condition in the code. In this correction, the 7 is changed to `UNKNOWN_SUIT` to relate directly to the type of card.

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void do_something(suit s);

void bridge(void)
{
    suit card = nextcard();
    if ((card < SPADES) || (card > CLUBS)){
        card = UNKNOWN_SUIT;
    }

    if (card > UNKNOWN_SUIT) {
        do_something(card);
    }
}
```

Another possible correction is to remove the if-condition in the code. Because the condition is always true, you can remove the condition to simplify your code.

```
typedef enum _suit {UNKNOWN_SUIT, SPADES, HEARTS, DIAMONDS, CLUBS} suit;
suit nextcard(void);
void do_something(suit s);

void bridge(void)
{
    suit card = nextcard();
    if ((card < SPADES) || (card > CLUBS)){
        card = UNKNOWN_SUIT;
    }

    do_something(card);
}
```

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** USELESS\_IF

**Impact:** Medium

## See Also

### **Polyspace Analysis Options**

Find defects (-checkers)

### **Polyspace Results**

Code deactivated by constant false condition | Dead code | Unreachable code

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Use of automatic variable as putenv-family function argument

putenv-family function argument not accessible outside its scope

### Description

**Use of automatic variable as putenv-family function argument** occurs when the argument of a putenv-family function is a local variable with automatic duration.

### Risk

The function `putenv(char *string)` inserts a pointer to its supplied argument into the environment array, instead of making a copy of the argument. If the argument is an automatic variable, its memory can be overwritten after the function containing the `putenv()` call returns. A subsequent call to `getenv()` from another function returns the address of an out-of-scope variable that cannot be dereferenced legally. This out-of-scope variable can cause environment variables to take on unexpected values, cause the program to stop responding, or allow arbitrary code execution vulnerabilities.

### Fix

Use `setenv()/unsetenv()` to set and unset environment variables. Alternatively, use putenv-family function arguments with dynamically allocated memory, or, if your application has no reentrancy requirements, arguments with static duration. For example, a single thread execution with no recursion or interrupts does not require reentrancy. It cannot be called (reentered) during its execution.

### Examples

#### Automatic Variable as Argument of `putenv()`

```
#include <stdio.h>
#include <stdlib.h>
```

```
#include <string.h>

#define SIZE1024 1024

void func(int var)
{
    char env[SIZE1024];
    int retval = sprintf(env, "TEST=%s", var ? "1" : "0");
    if (retval <= 0) {
        /* Handle error */
    }
    /* Environment variable TEST is set using putenv().
    The argument passed to putenv is an automatic variable. */
    retval = putenv(env);
    if (retval != 0) {
        /* Handle error */
    }
}
```

In this example, `sprintf()` stores the character string `TEST=var` in `env`. The value of the environment variable `TEST` is then set to `var` by using `putenv()`. Because `env` is an automatic variable, the value of `TEST` can change once `func()` returns.

Declare `env` as a static-duration variable. The memory location of `env` is not overwritten for the duration of the program, even after `func()` returns.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

#define SIZE1024 1024
void func(int var)
{
    /* static duration variable */
    static char env[SIZE1024];
    int retval = sprintf(env, "TEST=%s", var ? "1" : "0");
    if (retval <= 0) {
        /* Handle error */
    }

    /* Environment variable TEST is set using putenv() */
    retval=putenv(env);
    if (retval != 0) {
```

```
        /* Handle error */  
    }  
}
```

To set the value of TEST to var, use `setenv()`.

```
#include <stdio.h>  
#include <stdlib.h>  
#include <string.h>  
  
#define SIZE1024 1024  
  
void func(int var)  
{  
    /* Environment variable TEST is set using setenv() */  
    int retval = setenv("TEST", var ? "1" : "0", 1);  
  
    if (retval != 0) {  
        /* Handle error */  
    }  
}
```

## Result Information

**Group:** Static memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** PUTENV\_AUTO\_VAR

**Impact:** High

**CWE ID:** 562, 686, 825

**CERT C ID:** POS34-C

**CERT C++ ID:** POS34-C

**ISO/IEC TS 17961 ID:** addresscape

## See Also

Pointer or reference to stack variable leaving scope

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Use of dangerous standard function

Dangerous functions cause possible buffer overflow in destination buffer

### Description

The **Use of dangerous standard function** check highlights uses of functions that are inherently dangerous or potentially dangerous given certain circumstances. The following table lists possibly dangerous functions, the risks of using each function, and what function to use instead.

Dangerous Function	Risk Level	Safer Function
<code>gets</code>	Inherently dangerous — You cannot control the length of input from the console.	<code>fgets</code>
<code>cin</code>	Inherently dangerous — You cannot control the length of input from the console.	Avoid or prefaces calls to <code>cin</code> with <code>cin.width</code> .
<code>strcpy</code>	Possibly dangerous — If the source length is greater than the destination, buffer overflow can occur.	<code>strncpy</code>
<code>stpcpy</code>	Possibly dangerous — If the source length is greater than the destination, buffer overflow can occur.	<code>stpncpy</code>
<code>lstrcpy</code> or <code>StrCpy</code>	Possibly dangerous — If the source length is greater than the destination, buffer overflow can occur.	<code>StringCbCopy</code> , <code>StringCchCopy</code> , <code>strncpy</code> , <code>strcpy_s</code> , or <code>strncpy</code>

<b>Dangerous Function</b>	<b>Risk Level</b>	<b>Safer Function</b>
<code>strcat</code>	Possibly dangerous — If the concatenated result is greater than the destination, buffer overflow can occur.	<code>strncat</code> , <code>strlcat</code> , or <code>strcat_s</code>
<code>lstrcat</code> or <code>StrCat</code>	Possibly dangerous — If the concatenated result is greater than the destination, buffer overflow can occur.	<code>StringCbCat</code> , <code>StringCchCat</code> , <code>strncay</code> , <code>strcat_s</code> , or <code>strlcat</code>
<code>wpcpy</code>	Possibly dangerous — If the source length is greater than the destination, buffer overflow can occur.	<code>wcpncpy</code>
<code>wscat</code>	Possibly dangerous — If the concatenated result is greater than the destination, buffer overflow can occur.	<code>wcsncat</code> , <code>wcslcat</code> , or <code>wcncat_s</code>
<code>wscpy</code>	Possibly dangerous — If the source length is greater than the destination, buffer overflow can occur.	<code>wcsncpy</code>
<code>sprintf</code>	Possibly dangerous — If the output length depends on unknown lengths or values, buffer overflow can occur.	<code>snprintf</code>
<code>vsprintf</code>	Possibly dangerous — If the output length depends on unknown lengths or values, buffer overflow can occur.	<code>vsnprintf</code>

## Risk

These functions can cause buffer overflow, which attackers can use to infiltrate your program.

## Examples

### Using `sprintf`

```
#include <stdio.h>
#include <string.h>
#include <iostream>

#define BUFF_SIZE 128

int dangerous_func(char *str)
{
    char dst[BUFF_SIZE];
    int r = 0;

    if (sprintf(dst, "%s", str) == 1)
    {
        r += 1;
        dst[BUFF_SIZE-1] = '\\0';
    }

    return r;
}
```

This example function uses `sprintf` to copy the string `str` to `dst`. However, if `str` is larger than the buffer, `sprintf` can cause buffer overflow.

One possible correction is to use `snprintf` instead and specify a buffer size.

```
#include <stdio.h>
#include <string.h>
#include <iostream>

#define BUFF_SIZE 128

int dangerous_func(char *str)
{
    char dst[BUFF_SIZE];
    int r = 0;
```

```
    if (snprintf(dst, sizeof(dst), "%s", str) == 1)
    {
        r += 1;
        dst[BUFF_SIZE-1] = '\\0';
    }

    return r;
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** DANGEROUS\_STD\_FUNC

**Impact:** Low

**CWE ID:** 242, 676

**CERT C ID:** API02-C, ENV01-C, PRE09-C, STR07-C, STR31-C

**CERT C++ ID:** STR31-C, STR50-CPP

**ISO/IEC TS 17961 ID:** taintformatio

## See Also

Use of obsolete standard function|Unsafe standard function|Invalid use of standard library string routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Use of externally controlled environment variable

Value of environment variable from an unsecure source

## Description

**Use of externally controlled environment variable** checks for functions that add or change environment variables, such as `putenv` and `setenv`. If the new environment variable value is from an unsecure source, Polyspace raises a defect on the function or function pointer.

## Risk

If the environment variable is tainted, an attacker can control your system settings. This control can disrupt an application or service in potentially malicious ways.

## Fix

Before using the new environment variable, check its value to avoid giving control to external users.

## Examples

### Set Path in Environment

```
#define _XOPEN_SOURCE
#define _GNU_SOURCE
#include "stdlib.h"

void taintedenvvariable(char* path)
{
    putenv(path);
}
```

In this example, `putenv` changes an environment variable. The path `path` has not been checked to make sure that it is the intended path.

One possible correction is to sanitize the path, checking that it matches what you expect.

```
#define _XOPEN_SOURCE
#define _GNU_SOURCE
#define SIZE128 128
#include "stdlib.h"
#include "string.h"

/* Function to sanitize a string */
int sanitize_str(char* str, size_t n) {
    int res = 0;

    if (str && n > 0 && n < SIZE128) {
        /* string is not NULL, with size between 1 and max */
        str[n-1] = '\0'; /* Add a null char at end of string */
        /* Tainted pointer detected above, used as "firewall" */
        res = 1;
    }
    return res;
}

void taintedenvvariable(char* path, size_t n)
{
    if (sanitize_str(path, n))
    {
        unsigned int n2 = strlen("PATH=")+strlen(path, n);
        char *env_path = (char *)malloc(n2+1);
        if (env_path)
        {
            strcpy(env_path, "PATH=");
            strncat(env_path, path, n2);
            putenv(env_path);
        }
    }
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_ENV\_VARIABLE

**Impact:** Medium

**CWE ID:** 15

**CERT C ID:** API00-C

## See Also

Execution of externally controlled command | Host change using externally controlled elements | Command executed from externally controlled path | Library loaded from externally controlled path

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Use of indeterminate string

Use of buffer from fgets-family function

## Description

**Use of indeterminate string** occurs when you do not check the validity of the buffer returned from fgets-family functions. The checker raises a defect when such a buffer is used as:

- An argument in standard functions that print or manipulate strings or wide strings.
- A return value.
- An argument in external functions with parameter type `const char *` or `const wchar_t *`.

## Risk

If an fgets-family function fails, the content of its output buffer is indeterminate. Use of such a buffer has undefined behavior and can result in a program that stops working or other security vulnerabilities.

## Fix

Reset the output buffer of an fgets-family function to a known string value when the function fails.

## Examples

### Output of fgets ( ) Passed to External Function

```
#include <stdio.h>
#include <wchar.h>
#include <string.h>
#include <stdlib.h>
```

```
#define SIZE20 20

extern void display_text(const char *txt);

void func(void) {
    char buf[SIZE20];

    /* Check fgets() error */
    if (fgets (buf, sizeof (buf), stdin) == NULL)
    {
        /* 'buf' may contain an indeterminate string. */
        ;
    }
    /* 'buf' passed to external function */
    display_text(buf);
}
```

In this example, the output buf is passed to the external function `display_text()`, but its value is not reset if `fgets()` fails.

If `fgets()` fails, reset buf to a known value before you pass it to an external function.

```
#include <stdio.h>
#include <wchar.h>
#include <string.h>
#include <stdlib.h>

#define SIZE20 20

extern void display_text(const char *txt);

void func1(void) {
    char buf[SIZE20];
    /* Check fgets() error */
    if (fgets (buf, sizeof (buf), stdin) == NULL)
    {
        /* value of 'buf' reset after fgets() failure. */
        buf[0] = '\0';
    }
    /* 'buf' passed to external function */
    display_text(buf);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** INDETERMINATE\_STRING

**Impact:** Medium

**CERT C ID:** FIO40-C

**CERT C++ ID:** FIO40-C

## See Also

Invalid use of standard library string routine | Returned value of a sensitive function not checked | Use of dangerous standard function

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017b**

## Use of memset with size argument zero

Size argument of function in memset family is zero

### Description

**Use of memset with size argument zero** occurs when you call a function in the memset family with size argument zero. Functions include memset, wmemset, bzero, SecureZeroMemory, RtlSecureZeroMemory, and so on.

### Risk

`void *memset (void *ptr, int value, size_t num)` fills the first `num` bytes of the memory block that `ptr` points to with the specified `value`. A zero value of `num` renders the call to `memset` redundant. The memory that `ptr` points to:

- Remains uninitialized, if not previously initialized.
- Is not cleared and can contain sensitive data, if previously initialized.

### Fix

Determine if the zero size argument occurs because of a previous error in your code. Fix the error.

## Examples

### Zero Size Argument of memset

```
#include <stdio.h>
#include <string.h>

void func (unsigned int size)
{
    char str[] = "Buffer to be filled.";
    memset (str, '-',size);
}
```

```
    puts (str);  
}  
  
void calling_func(void) {  
    unsigned int buf_size=0;  
    func(buf_size);  
}
```

In this example, the argument size of memset is zero.

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** MEMSET\_INVALID\_SIZE

**Impact:** Medium

**CWE ID:** 665

**CERT C ID:** MSC12-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Call to memset with unintended value

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Use of non-secure temporary file

Temporary generated file name not secure

### Description

**Use of non-secure temporary file** looks for temporary file routines that are not secure.

### Risk

If an attacker guesses the file name generated by a standard temporary file routine, the attacker can:

- Cause a race condition when you generate the file name.
- Precreate a file of the same name, filled with malicious content. If your program reads the file, the attacker's file can inject the malicious code.
- Create a symbolic link to a file storing sensitive data. When your program writes to the temporary file, the sensitive data is deleted.

### Fix

To create temporary files, use a more secure standard temporary file routine, such as `mkstemp` from POSIX.1-2001.

Also, when creating temporary files with routines that allow flags, such as `mkostemp`, use the exclusion flag `O_EXCL` to avoid race conditions.

## Examples

### Temp File Created With `tempnam`

```
#define _BSD_SOURCE
#define _XOPEN_SOURCE
#define _GNU_SOURCE
```

```

#include <stdio.h>
#include <stdlib.h>
#include <sys/types.h>
#include <sys/stat.h>
#include <fcntl.h>
#include <unistd.h>

int test_temp()
{
    char tpl[] = "abcXXXXXX";
    char suff_tpl[] = "abcXXXXXXsuff";
    char *filename = NULL;
    int fd;

    filename = tempnam("/var/tmp", "foo_");

    if (filename != NULL)
    {
        printf("generated tmp name (%s) in (%s:%s:%s)\n",
            filename, getenv("TMPDIR") ? getenv("TMPDIR") : "$TMPDIR",
            "/var/tmp", P_tmpdir);

        fd = open(filename, O_CREAT, S_IRWXU|S_IRUSR);
        if (fd != -1)
        {
            close(fd);
            unlink(filename);
            return 1;
        }
    }
    return 0;
}

```

In this example, Bug Finder flags `open` because it tries to use an unsecure temporary file. The file is opened without exclusive privileges. An attacker can access the file causing various risks on page 3-774.

One possible correction is to add the `O_EXCL` flag when you open the temporary file.

```

#define _BSD_SOURCE
#define _XOPEN_SOURCE
#define _GNU_SOURCE

#include <stdio.h>

```

```
#include <stdlib.h>
#include <sys/types.h>
#include <sys/stat.h>
#include <fcntl.h>
#include <unistd.h>

int test_temp()
{
    char tpl[] = "abcXXXXXX";
    char suff_tpl[] = "abcXXXXXXsuff";
    char *filename = NULL;
    int fd;

    filename = tempnam("/var/tmp", "foo_");

    if (filename != NULL)
    {
        printf("generated tmp name (%s) in (%s:%s:%s)\n",
            filename, getenv("TMPDIR") ? getenv("TMPDIR") : "$TMPDIR",
            "/var/tmp", P_tmpdir);

        fd = open(filename, O_CREAT|O_EXCL, S_IRWXU|S_IRUSR);
        if (fd != -1)
        {
            close(fd);
            unlink(filename);
            return 1;
        }
    }
    return 0;
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** NON\_SECURE\_TEMP\_FILE

**Impact:** High

**CWE ID:** 377, 922

**CERT C ID:** FIO03-C, FIO21-C

## **See Also**

Data race

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Use of obsolete standard function

Obsolete routines can cause security vulnerabilities and portability issues

### Description

**Use of obsolete standard function** detects calls to standard function routines that are considered legacy, removed, deprecated, or obsolete by C/C++ coding standards.

Obsolete Function	Standards	Risk	Replacement Function
asctime	Deprecated in POSIX.1-2008	Not thread-safe.	strftime or asctime_s
asctime_r	Deprecated in POSIX.1-2008	Implementation based on unsafe function sprintf.	strftime or asctime_s
bcmp	Deprecated in 4.3BSD Marked as legacy in POSIX.1-2001.	Returns from function after finding the first differing byte, making it vulnerable to timing attacks.	memcmp
bcopy	Deprecated in 4.3BSD Marked as legacy in POSIX.1-2001.	Returns from function after finding the first differing byte, making it vulnerable to timing attacks.	memcpy or memmove
brk and sbrk	Marked as legacy in SUSv2 and POSIX.1-2001.		malloc
bsd_signal	Removed in POSIX.1-2008		sigaction
bzero	Marked as legacy in POSIX.1-2001. Removed in POSIX.1-2008.		memset
ctime	Deprecated in POSIX.1-2008	Not thread-safe.	strftime or asctime_s

Obsolete Function	Standards	Risk	Replacement Function
ctime_r	Deprecated in POSIX.1-2008	Implementation based on unsafe function sprintf.	strftime or asctime_s
cuserid	Removed in POSIX.1-2001.	Not reentrant. Precise functionality not standardized causing portability issues.	getpwuid
ecvt and fcvt	Marked as legacy in POSIX.1-2001. Removed in POSIX.1-2008	Not reentrant	snprintf
ecvt_r and fcvt_r	Marked as legacy in POSIX.1-2001. Removed in POSIX.1-2008		snprintf
ftime	Removed in POSIX.1-2008		time, gettimeofday, clock_gettime
gamma, gammaf, gammal	Function not specified in any standard because of historical variations	Portability issues.	tgamma, lgamma
gcvt	Marked as legacy in POSIX.1-2001. Removed in POSIX.1-2008.		snprintf
getcontext	Removed in POSIX.1-2008.	Portability issues.	Use POSIX thread instead.
getdtablesize	BSD API function not included in POSIX.1-2001	Portability issues.	sysconf( _SC_OPEN_MAX )
gethostbyaddr	Removed in POSIX.1-2008	Not reentrant	getaddrinfo
gethostbyname	Removed in POSIX.1-2008	Not reentrant	getnameinfo
getpagesize	BSD API function not included in POSIX.1-2001	Portability issues.	sysconf( _SC_PAGESIZE )
getpass	Removed in POSIX.1-2001.	Not reentrant.	getpwuid
getw	Not present in POSIX.1-2001.		fread

Obsolete Function	Standards	Risk	Replacement Function
getwd	Marked legacy in POSIX.1-2001. Removed in POSIX.1-2008.		getcwd
index	Marked as legacy in POSIX.1-2001. Removed in POSIX.1-2008.		strchr
makecontext	Removed in POSIX.1-2008.	Portability issues.	Use POSIX thread instead.
memalign	Appears in SunOS 4.1.3. Not in 4.4 BSD or POSIX.1-2001		posix_memalign
mktemp	Removed in POSIX.1-2008.	Generated names are predictable and can cause a race condition.	mkstemp removes race risk
pthread_attr_getstackaddr and pthread_attr_setstackaddr		Ambiguities in the specification of the stackaddr attribute cause portability issues	pthread_attr_getstack and pthread_attr_setstack
putw	Not present in POSIX.1-2001.	Portability issues.	fwrite
qecvt and qfcvt	Marked as legacy in POSIX.1-2001, removed in POSIX.1-2008		snprintf
qecvt_r and qfcvt_r	Marked as legacy in POSIX.1-2001, removed in POSIX.1-2008		snprintf
rand_r	Marked as obsolete in POSIX.1-2008		
re_comp	BSD API function	Portability issues	regcomp
re_exec	BSD API function	Portability issues	regexec
rindex	Marked as legacy in POSIX.1-2001. Removed in POSIX.1-2008.		strrchr

Obsolete Function	Standards	Risk	Replacement Function
scalb	Removed in POSIX.1-2008		scalbln, scalblnf, or scalblnl
sigblock	4.3BSD signal API whose origin is unclear		sigprocmask
sigmask	4.3BSD signal API whose origin is unclear		sigprocmask
sigsetmask	4.3BSD signal API whose origin is unclear		sigprocmask
sigstack	Interface is obsolete and not implemented on most platforms.	Portability issues.	sigaltstack
sigvec	4.3BSD signal API whose origin is unclear		sigaction
swapcontext	Removed in POSIX.1-2008	Portability issues.	Use POSIX threads.
tmpnam and tmpnam_r	Marked as obsolete in POSIX.1-2008.	This function generates a different string each time it is called, up to TMP_MAX times. If it is called more than TMP_MAX times, the behavior is implementation-defined.	mkstemp, tmpfile
ttyslot	Removed in POSIX.1-2001.		
ualarm	Marked as legacy in POSIX.1-2001. Removed in POSIX.1-2008.	Errors are under-specified	setitimer or POSIX timer_create
usleep	Removed in POSIX.1-2008.		nanosleep
utime	SVr4, POSIX.1-2001. POSIX.1-2008 marks as obsolete.		

<b>Obsolete Function</b>	<b>Standards</b>	<b>Risk</b>	<b>Replacement Function</b>
valloc	Marked as obsolete in 4.3BSD. Marked as legacy in SUSv2. Removed from POSIX.1-2001		posix_memalign
vfork	Removed from POSIX.1-2008	Under-specified in previous standards.	fork
wcswcs	This function was not included in the final ISO/IEC 9899:1990/Amendment 1:1995 (E).		wcsstr
WinExec	WinAPI provides this function only for 16-bit Windows compatibility.		CreateProcess
LoadModule	WinAPI provides this function only for 16-bit Windows compatibility.		CreateProcess

## Examples

### Printing Out Time

```
#include <stdio.h>
#include <time.h>

void timecheck_bad(int argc, char *argv[])
{
    time_t ticks;

    ticks = time(NULL);
    printf("%.24s\r\n", ctime(&ticks));
}
```

In this example, the function `ctime` formats the current time and prints it out. However, `ctime` was removed after C99 because it does not work on multithreaded programs.

One possible correction is to use `strftime` instead because this function uses a set buffer size.

```
#include <stdio.h>
#include <string.h>
#include <time.h>

void timecheck_good(int argc, char *argv[])
{
    char outBuff[1025];
    time_t ticks;
    struct tm * timeinfo;

    memset(outBuff, 0, sizeof(outBuff));

    ticks = time(NULL);
    timeinfo = localtime(&ticks);
    strftime(outBuff, sizeof(outBuff), "%I:%M%p.", timeinfo);
    fprintf(stdout, outBuff);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** OBSOLETE\_STD\_FUNC

**Impact:** Low

**CWE ID:** 474, 477

**CERT C ID:** MSC24-C, MSC33-C, POS33-C, PRE09-C

**CERT C++ ID:** MSC33-C, POS33-C

## See Also

Use of dangerous standard function | Unsafe standard function | Invalid use of standard library string routine

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Use of path manipulation function without maximum sized buffer checking

Destination buffer of `getwd` or `realpath` is smaller than `PATH_MAX` bytes

## Description

**Use of path manipulation function without maximum-sized buffer checking** occurs when the destination argument of a path manipulation function such as `realpath` or `getwd` has a buffer size less than `PATH_MAX` bytes.

## Risk

A buffer smaller than `PATH_MAX` bytes can overflow but you cannot test the function return value to determine if an overflow occurred. If an overflow occurs, following the function call, the content of the buffer is undefined.

For instance, `char *getwd(char *buf)` copies an absolute path name of the current folder to its argument. If the length of the absolute path name is greater than `PATH_MAX` bytes, `getwd` returns `NULL` and the content of `*buf` is undefined. You can test the return value of `getwd` for `NULL` to see if the function call succeeded.

However, if the allowed buffer for `buf` is less than `PATH_MAX` bytes, a failure can occur for a smaller absolute path name. In this case, `getwd` does not return `NULL` even though a failure occurred. Therefore, the allowed buffer for `buf` must be `PATH_MAX` bytes long.

## Fix

Possible fixes are:

- Use a buffer size of `PATH_MAX` bytes. If you obtain the buffer from an unknown source, before using the buffer as argument of `getwd` or `realpath` function, make sure that the size is less than `PATH_MAX` bytes.
- Use a path manipulation function that allows you to specify a buffer size.

For instance, if you are using `getwd` to get the absolute path name of the current folder, use `char *getcwd(char *buf, size_t size);` instead. The additional argument `size` allows you to specify a size greater than or equal to `PATH_MAX`.

- Allow the function to allocate additional memory dynamically, if possible.

For instance, `char *realpath(const char *path, char *resolved_path);` dynamically allocates memory if `resolved_path` is `NULL`. However, you have to deallocate this memory later using the `free` function.

## Examples

### Possible Buffer Overflow in Use of `getwd` Function

```
#include <unistd.h>
#include <linux/limits.h>
#include <stdio.h>

void func(void) {
    char buf[PATH_MAX];
    if (getwd(buf+1) != NULL) {
        printf("cwd is %s\n", buf);
    }
}
```

In this example, although the array `buf` has `PATH_MAX` bytes, the argument of `getwd` is `buf + 1`, whose allowed buffer is less than `PATH_MAX` bytes.

One possible correction is to use an array argument with size equal to `PATH_MAX` bytes.

```
#include <unistd.h>
#include <linux/limits.h>
#include <stdio.h>

void func(void) {
    char buf[PATH_MAX];
    if (getwd(buf) != NULL) {
        printf("cwd is %s\n", buf);
    }
}
```

## Result Information

**Group:** Static memory

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** PATH\_BUFFER\_OVERFLOW

**Impact:** High

**CWE ID:** 785

**ISO/IEC TS 17961 ID:** libptr

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Use of plain char type for numerical value

Plain char variable in arithmetic operation without explicit signedness

### Description

**Use of plain char type for numerical value** detects char variables without explicit signedness that are being used in these ways:

- To store non-char constants
- In an arithmetic operation when the char is:
  - A negative value.
  - The result of a sign changing overflow.
- As a buffer offset.

char variables without a `signed` or `unsigned` qualifier can be either signed or unsigned depending on your compiler.

### Risk

Operations on a plain char can result in unexpected numerical values. If the char is used as an offset, the char can cause buffer overflow or underflow.

### Fix

When initializing a char variable, to avoid implementation-defined confusion, explicitly state whether the char is signed or unsigned.

## Examples

### Divide by char Variable

```
#include <stdio.h>
```

```
void badplaincharuse(void)
{
    char c = 200;
    int i = 1000;
    (void)printf("i/c = %d\n", i/c);
}
```

In this example, the char variable `c` can be signed or unsigned depending on your compiler. Assuming 8-bit, two's complement character types, the result is either `i/c = 5` (unsigned char) or `i/c = -17` (signed char). The correct result is unknown without knowing the signedness of char.

One possible correction is to add a signed qualifier to char. This clarification makes the operation defined.

```
#include <stdio.h>

void badplaincharuse(void)
{
    signed char c = -56;
    int i = 1000;
    (void)printf("i/c = %d\n", i/c);
}
```

## Result Information

**Group:** Numerical

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** BAD\_PLAIN\_CHAR\_USE

**Impact:** Medium

**CWE ID:** 682, 758

**CERT C ID:** INT07-C

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2016b**

# Use of previously closed resource

Function operates on a previously closed stream

## Description

**Use of previously closed resource** occurs when a function operates on a stream that you closed earlier in your code.

## Risk

The standard states that the value of a FILE\* pointer is indeterminate after you close the stream associated with it. Operations using the FILE\* pointer can produce unintended results.

## Fix

One possible fix is to close the stream only at the end of operations. Another fix is to reopen the stream before using it again.

## Examples

### Use of FILE\* Pointer After Closing Stream

```
#include <stdio.h>

void func(void) {
    FILE *fp;
    void *ptr;

    fp = fopen("tmp", "w");
    if(fp != NULL) {
        fclose(fp);
        fprintf(fp, "text");
    }
}
```

In this example, `fclose` closes the stream associated with `fp`. When you use `fprintf` on `fp` after `fclose`, the **Use of previously closed resource** defect appears.

One possible correction is to reverse the order of the `fprintf` and `fclose` operations.

```
#include <stdio.h>

void func(void) {
    FILE *fp;
    void *ptr;

    fp = fopen("tmp", "w");
    if (fp != NULL) {
        fprintf(fp, "text");
        fclose(fp);
    }
}
```

## Result Information

**Group:** Resource management

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** CLOSED\_RESOURCE\_USE

**Impact:** High

**CWE ID:** 672, 826, 910

**CERT C ID:** FIO46-C

**CERT C++ ID:** FIO46-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

MISRA C:2012 Rule 22.6

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Use of previously freed pointer

Memory accessed after deallocation

### Description

**Use of previously freed pointer** occurs when a block of memory is accessed after it is freed using the `free` function.

### Examples

#### Use of Previously Freed Pointer Error

```
#include <stdlib.h>
#include <stdio.h>
int increment_content_of_address(int base_val, int shift)
{
    int j;
    int* pi = (int*)malloc(sizeof(int));
    if (pi == NULL) return 0;

    *pi = base_val;
    free(pi);

    j = *pi + shift;
    /* Defect: Reading a freed pointer */

    return j;
}
```

The `free` statement releases the block of memory that `pi` refers to. Therefore, dereferencing `pi` after the `free` statement is not valid.

One possible correction is to free the pointer `pi` only after the last instance where it is accessed.

```
#include <stdlib.h>
```

```
int increment_content_of_address(int base_val, int shift)
{
    int j;
    int* pi = (int*)malloc(sizeof(int));
    if (pi == NULL) return 0;

    *pi = base_val;

    j = *pi + shift;
    *pi = 0;

    /* Fix: The pointer is freed after its last use */
    free(pi);
    return j;
}
```

## Check Information

**Group:** Dynamic memory

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** FREED\_PTR

**Impact:** High

**CWE ID:** 416, 825

**CERT C ID:** MEM00-C, MEM30-C

**CERT C++ ID:** EXP54-CPP, MEM30-C, MEM50-CPP, MEM51-CPP

**ISO/IEC TS 17961 ID:** accfree, dblfree

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

Deallocation of previously deallocated pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Use of signal to kill thread

Uncaught signal kills entire process instead of specific thread

## Description

**Use of signal to kill thread** occurs when you use an uncaught signal to kill a thread. For instance, you use the POSIX function `pthread_kill` and send the signal `SIGTERM` to kill a thread.

## Risk

Sending a signal kills the entire process instead of just the thread that you intend to kill.

For instance, the `pthread_kill` specifications state that if the disposition of a signal is to terminate, this action affects the entire process.

## Fix

Use other mechanisms that are intended to kill specific threads.

For instance, use the POSIX function `pthread_cancel` to terminate a specific thread.

## Examples

### Use of `pthread_kill` to Terminate Threads

```
#include <signal.h>
#include <pthread.h>

void* func(void *foo) {
    /* Execution of thread */
}

int main(void) {
    int result;
```

```
pthread_t thread;

if ((result = pthread_create(&thread, NULL, func, 0)) != 0) {
}
if ((result = pthread_kill(thread, SIGTERM)) != 0) {
}

/* This point is not reached because the process terminates in pthread_kill() */

return 0;
}
```

In this example, the `pthread_kill` function sends the signal `SIGTERM` to kill a thread. The signal kills the entire process instead of the thread previously created with `pthread_create`.

One possible correction is to use the `pthread_cancel` function. The `pthread_cancel` terminates a thread specified by its first argument at a specific cancellation point or immediately, depending on the thread's cancellation type.

```
#include <signal.h>
#include <pthread.h>

void* func(void *foo) {
    /* Execution of thread */
}

int main(void) {
    int result;
    pthread_t thread;

    if ((result = pthread_create(&thread, NULL, func, 0)) != 0) {
        /* Handle Error */
    }
    if ((result = pthread_cancel(thread)) != 0) {
        /* Handle Error */
    }

    /* Continue executing */

    return 0;
}
```

See also:

- `pthread_cancel` for more information on cancellation types.
- Pthreads for functions that are allowed to be cancellation points.

## Result Information

**Group:** Concurrency

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** `THREAD_KILLED_WITH_SIGNAL`

**Impact:** Low

**CERT C ID:** POS44-C

**CERT C++ ID:** POS44-C

## See Also

Signal call in multithreaded program

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018b**

## Use of `setjmp/longjmp`

`setjmp` and `longjmp` cause deviation from normal control flow

### Description

**Use of `setjmp/longjmp`** occurs when you use a combination of `setjmp` and `longjmp` or `sigsetjmp` and `siglongjmp` to deviate from normal control flow and perform non-local jumps in your code.

### Risk

Using `setjmp` and `longjmp`, or `sigsetjmp` and `siglongjmp` has the following risks:

- Nonlocal jumps are vulnerable to attacks that exploit common errors such as buffer overflows. Attackers can redirect the control flow and potentially execute arbitrary code.
- Resources such as dynamically allocated memory and open files might not be closed, causing resource leaks.
- If you use `setjmp` and `longjmp` in combination with a signal handler, unexpected control flow can occur. POSIX does not specify whether `setjmp` saves the signal mask.
- Using `setjmp` and `longjmp` or `sigsetjmp` and `siglongjmp` makes your program difficult to understand and maintain.

### Fix

Perform nonlocal jumps in your code using `setjmp/longjmp` or `sigsetjmp/siglongjmp` only in contexts where such jumps can be performed securely. Alternatively, use POSIX threads if possible.

In C++, to simulate throwing and catching exceptions, use standard idioms such as `throw` expressions and `catch` statements.

## Examples

### Use of setjmp and longjmp

```
#include <setjmp.h>
#include <signal.h>

extern int update(int);
extern void print_int(int);

static jmp_buf env;
void sighandler(int signum) {
    longjmp(env, signum);
}
void func_main(int i) {
    signal(SIGINT, sighandler);
    if (setjmp(env)==0) {
        while(1) {
            /* Main loop of program, iterates until SIGINT signal catch */
            i = update(i);
        }
    } else {
        /* Managing longjmp return */
        i = -update(i);
    }

    print_int(i);
    return;
}
```

In this example, the initial return value of `setjmp` is 0. The `update` function is called in an infinite while loop until the user interrupts it through a signal.

In the signal handling function, the `longjmp` statement causes a jump back to `main` and the return value of `setjmp` is now 1. Therefore, the `else` branch is executed.

To emulate the same behavior more securely, use a `volatile` global variable instead of a combination of `setjmp` and `longjmp`.

```
#include <setjmp.h>
#include <signal.h>
```

```
extern int update(int);
extern void print_int(int);

volatile sig_atomic_t eflag = 0;

void sighandler(int signum) {
    eflag = signum;                /* Fix: using global variable */
}

void func_main(int i) {
    /* Fix: Better design to avoid use of setjmp/longjmp */
    signal(SIGINT, sighandler);
    while(!eflag) {                /* Fix: using global variable */
        /* Main loop of program, iterates until eflag is changed */
        i = update(i);
    }

    print_int(i);
    return;
}
```

## Result Information

**Group:** Good practice

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** SETJMP\_LONGJMP\_USE

**Impact:** Low

**CWE ID:** 691

**CERT C ID:** MSC22-C

**CERT C++ ID:** ERR52-CPP

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

## **External Websites**

Linux man page for setjmp

**Introduced in R2015b**

# Use of tainted pointer

Pointer from an unsecure source may be NULL or point to unknown memory

## Description

**Use of tainted pointer** defect is raised when:

- Tainted NULL pointer — the pointer is not validated against NULL.
- Tainted size pointer — the size of the memory zone that a pointer points to is not validated.

---

**Note** On a single pointer, your code can have instances of **Use of tainted pointer**, **Pointer dereference with tainted offset**, and **Tainted NULL or non-null-terminated string**. Bug Finder raises only the first tainted pointer defect that it finds.

---

## Risk

An attacker can give your program a pointer that points to unexpected memory locations. If the pointer is dereferenced to write, the attacker can:

- Modify the state variables of a critical program.
- Cause your program to crash.
- Execute unwanted code.

If the pointer is dereferenced to read, the attacker can:

- Read sensitive data.
- Cause your program to crash.
- Modify a program variable to an unexpected value.

## Fix

If you expect a valid memory location, check that the pointer is not NULL. Also, check the size of the memory location. This second check validates whether the size of the data the pointer points to matches the size your program expects.

## Examples

### Function to Change Pointer

```
void taintedptr(int* p, int i) {
    *p = i;
}
```

In this example, the pointer `*p` is passed as an argument, and the value is changed. The pointer can be null or point to unknown memory, which can be vulnerable.

One possible correction is to sanitize the pointer before using it. This example uses a second function to check if the pointer is null and can be dereferenced.

```
#include <stdlib.h>

int* sanitize_ptr(int* p) {
    int* res = NULL;
    if (p && *p) { /* Tainted pointer detected here, used as "firewall" */
        /* Pointer is not null and dereference ok */
        res = p;
    }
    return res;
}

void taintedptr(int* p, int i) {
    p = sanitize_ptr(p);
    if (p) {
        *p = i;
    }
}
```

## Result Information

**Group:** Tainted Data

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** TAINTED\_PTR

**Impact:** Low

**CWE ID:** 690, 822

**CERT C ID:** API00-C, API02-C, ARR30-C, ARR38-C, EXP34-C, MEM10-C, MSC15-C

**CERT C++ ID:** ARR30-C, ARR38-C, CTR50-CPP, EXP34-C, STR53-CPP

**ISO/IEC TS 17961 ID:** invptr, nullref

## See Also

Pointer dereference with tainted offset

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Variable length array with nonpositive size

Size of variable-length array is zero or negative

## Description

**Variable length array with non-positive size** occurs when size of a variable-length array is zero or negative.

## Risk

If the size of a variable-length array is zero or negative, unexpected behavior can occur, such as stack overflow.

## Fix

When you declare a variable-length array as a local variable in a function:

- If you use a function parameter as the array size, check that the parameter is positive.
- If you use the result of a computation on a function parameter as the array size, check that the result is positive.

You can place a test for positive value either before the function call or the array declaration in the function body.

## Examples

### Nonpositive Array Size

```
int input(void);

void add_scalar(int n, int m) {
    int r=0;
    int arr[m][n];
    for (int i=0; i<m; i++) {
```

```
        for (int j=0; j<n; j++) {
            arr[i][j] = input();
            r += arr[i][j];
        }
    }

void main() {
    add_scalar(2,2);
    add_scalar(-1,2);
    add_scalar(2,0);
}
```

In this example, the second and third calls to `add_scalar` result in a negative and zero size of `arr`.

One possible correction is fix or remove calls that result in a nonpositive array size.

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `NON_POSITIVE_VLA_SIZE`

**Impact:** High

**CWE ID:** 687

**CERT C ID:** MEM04-C, MEM05-C

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Variable shadowing

Variable hides another variable of same name with nested scope

## Description

**Variable shadowing** occurs when a variable hides another variable of the same name with nested scope.

## Examples

### Variable Shadowing Error

```
#include <stdio.h>

int fact[5]={1,2,6,24,120};

int factorial(int n)
{
    int fact=1;
    /*Defect: Local variable hides global array with same name */

    for(int i=1;i<=n;i++)
        fact*=i;

    return(fact);
}
```

Inside the `factorial` function, the integer variable `fact` hides the global integer array `fact`.

One possible correction is to change the name of one of the variables, preferably the one with more local scope.

```
#include <stdio.h>

int fact[5]={1,2,6,24,120};
```

```
int factorial(int n)
{
    /* Fix: Change name of local variable */
    int f=1;

    for(int i=1;i<=n;i++)
        f*=i;

    return(f);
}
```

### Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On for handwritten code, off for generated code

**Command-Line Syntax:** VAR\_SHADOWING

**Impact:** Low

**CERT C ID:** DCL01-C

### See Also

Find defects (-checkers)

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Vulnerable path manipulation

Path argument with `/../`, `/abs/path/`, or other unsecure elements

## Description

**Vulnerable path manipulation** detects relative or absolute path traversals. If the path traversal contains a tainted source, or you use the path to open/create files, Bug Finder raises a defect.

## Risk

Relative path elements, such as `".."` can resolve to locations outside the intended folder. Absolute path elements, such as `"/abs/path"` can also resolve to locations outside the intended folder.

An attacker can use these types of path traversal elements to traverse to the rest of the file system and access other files or folders.

## Fix

Avoid vulnerable path traversal elements such as `/../` and `/abs/path/`. Use fixed file names and locations wherever possible.

## Examples

### Relative Path Traversal

```
# include <stdio.h>
# include <string.h>
# include <wchar.h>
# include <sys/types.h>
# include <sys/stat.h>
# include <fcntl.h>
# include <unistd.h>
# include <stdlib.h>
```

```
# define BASEPATH "/tmp/"
# define FILENAME_MAX 512

static void Relative_Path_Traversal(void)
{
    char * data;
    char data_buf[FILENAME_MAX] = BASEPATH;
    char sub_buf[FILENAME_MAX];

    if (fgets(sub_buf, FILENAME_MAX, stdin) == NULL) exit (1);
    data = data_buf;
    strcat(data, sub_buf);

    FILE *file = NULL;
    file = fopen(data, "wb+");
    if (file != NULL) fclose(file);
}

int path_call(void){
    Relative_Path_Traversal();
}
```

This example opens a file from `"/tmp/"`, but uses a relative path to the file. An external user can manipulate this relative path when `fopen` opens the file.

One possible correction is to use a fixed file name instead of a relative path. This example uses `file.txt`.

```
# include <stdio.h>
# include <string.h>
# include <wchar.h>
# include <sys/types.h>
# include <sys/stat.h>
# include <fcntl.h>
# include <unistd.h>
# include <stdlib.h>
# define BASEPATH "/tmp/"
# define FILENAME_MAX 512

static void Relative_Path_Traversal(void)
{
    char * data;
    char data_buf[FILENAME_MAX] = BASEPATH;
    data = data_buf;
```

```
    /* FIX: Use a fixed file name */
    strcat(data, "file.txt");
    FILE *file = NULL;
    file = fopen(data, "wb+");
    if (file != NULL) fclose(file);
}

int path_call(void){
    Relative_Path_Traversal();
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** PATH\_TRAVERSAL

**Impact:** Low

**CWE ID:** 22, 23, 36

**CERT C ID:** FIO02-C

## See Also

Use of path manipulation function without maximum sized buffer checking

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Vulnerable permission assignments

Argument gives read/write/search permissions to external users

### Description

**Vulnerable permission assignments** looks at functions that can change file permissions, such as `chmod`, `umask`, `creat`, or `open`. If the specified permissions allow unintended actors to modify or read the resource, Bug Finder flags the functions as a defect.

### Risk

If you give outside users or outside groups a wider range of permissions than required, you potentially expose your sensitive information and your modifications. This defect is especially dangerous for permissions related to:

- Program configurations
- Program executions
- Sensitive user data

### Fix

Set your permissions so that the user (u) has more permissions than the group (g), and so the group has more permissions than other users (o), or `u >= g >= o`.

## Examples

### Create File with Other Permissions

```
#include <unistd.h>
#include <sys/types.h>
#include <sys/stat.h>
#include <fcntl.h>
```

```
void bug_dangerouspermissions(const char * log_path) {
    mode_t mode = S_IROTH | S_IXOTH | S_IWOTH;
    int fd = creat(log_path, mode);

    if (fd) {
        write(fd, "Hello\n", 6);
    }
    close(fd);
    unlink(log_path);
}
```

In this example, the `log_path` file is created with more rights for the other outside users, than the current user. The permissions are -----rwx.

One possible correction is to modify the user permissions for the file. In this correction, the user has read/write/execute permissions, but other users do not.

```
#include <unistd.h>
#include <sys/types.h>
#include <sys/stat.h>
#include <fcntl.h>

void corrected_dangerouspermissions(const char * log_path) {
    mode_t mode = S_IRUSR | S_IXUSR | S_IWUSR;
    int fd = creat(log_path, mode);

    if (fd) {
        write(fd, "Hello\n", 6);
    }
    close(fd);
    unlink(log_path);
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** DANGEROUS\_PERMISSIONS

**Impact:** Medium

**CWE ID:** 732, 922

**CERT C ID:** FIO06-C

## **See Also**

Umask used with chmod-style arguments

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

# Vulnerable pseudo-random number generator

Using a cryptographically weak pseudo-random number generator

## Description

The **Vulnerable pseudo-random number generator** identifies uses of cryptographically weak pseudo-random number generator (PRNG) routines.

The list of cryptographically weak routines flagged by this checker include:

- `rand`, `random`
- `drand48`, `lrand48`, `mrnd48`, `erand48`, `rand48`, `jrand48`, and their `_r` equivalents such as `drand48_r`
- `RAND_pseudo_bytes`

## Risk

These cryptographically weak routines are predictable and must not be used for security purposes. When a predictable random value controls the execution flow, your program is vulnerable to malicious attacks.

## Fix

Use more cryptographically sound random number generators, such as `CryptGenRandom` (Windows), `OpenSSL/RAND_bytes` (Linux/UNIX).

## Examples

### Random Loop Numbers

```
#include <stdio.h>
```

```
#include <stdlib.h>

volatile int rd = 1;
int main(int argc, char *argv[])
{
    int j, r, nloops;
    struct random_data buf;
    int i = 0;

    nloops = rand();

    for (j = 0; j < nloops; j++) {
        if (random_r(&buf, &i))
            exit(1);
        printf("random_r: %ld\n", (long)i);
    }
    return 0;
}
```

This example uses `rand` and `random_r` to generate random numbers. If you use these functions for security purposes, these PRNGs can be the source of malicious attacks.

One possible correction is to replace the vulnerable PRNG with a stronger random number generator.

```
#include <stdio.h>
#include <stdlib.h>
#include <openssl/rand.h>

volatile int rd = 1;
int main(int argc, char* argv[])
{
    int j, r, nloops;
    unsigned char buf;
    unsigned int seed;
    int i = 0;

    if (argc != 3)
    {
        fprintf(stderr, "Usage: %s <seed> <nloops>\n", argv[0]);
        exit(EXIT_FAILURE);
    }
}
```

```
seed = atoi(argv[1]);
nloops = atoi(argv[2]);

for (j = 0; j < nloops; j++) {
    if (RAND_bytes(&buf, i) != 1)
        exit(1);
    printf("RAND_bytes: %u\n", (unsigned)buf);
}
return 0;
}
```

## Result Information

**Group:** Security

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** VULNERABLE\_PRNG

**Impact:** Medium

**CWE ID:** 330, 338

**CERT C ID:** MSC30-C

**CERT C++ ID:** MSC30-C, MSC50-CPP

## See Also

Deterministic random output from constant seed | Predictable random output from predictable seed | Unsafe standard encryption function

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Weak cipher algorithm

Encryption algorithm associated with the cipher context is weak

### Description

**Weak cipher algorithm** occurs when you associate a weak encryption algorithm with the cipher context.

### Risk

Some encryption algorithms have known flaws. Though the OpenSSL library still supports the algorithms, you must avoid using them.

If your cipher algorithm is weak, an attacker can decrypt your data by exploiting a known flaw or brute force attacks.

### Fix

Use algorithms that are well-studied and widely acknowledged as secure.

For instance, the Advanced Encryption Standard (AES) is a widely accepted cipher algorithm.

## Examples

### Use of DES Algorithm

```
#include <openssl/evp.h>
#include <stdlib.h>

void func(unsigned char *key, unsigned char *iv) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);
}
```

```
    const EVP_CIPHER * ciph = EVP_des_cbc();
    EVP_EncryptInit_ex(ctx, ciph, NULL, key, iv);
}
```

In this example, the routine `EVP_des_cbc()` invokes the Data Encryption Standard (DES) algorithm, which is now considered as non-secure and relatively slow.

One possible correction is to use the faster and more secure Advanced Encryption Standard (AES) algorithm instead.

```
#include <openssl/evp.h>
#include <stdlib.h>

void func(unsigned char *key, unsigned char *iv) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);
    const EVP_CIPHER * ciph = EVP_aes_128_cbc();
    EVP_EncryptInit_ex(ctx, ciph, NULL, key, iv);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_CIPHER\_WEAK\_CIPHER

**Impact:** Medium

**CWE ID:** 310, 326, 327

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

## Weak cipher mode

Encryption mode associated with the cipher context is weak

### Description

**Weak cipher mode** occurs when you associate a weak block cipher mode with the cipher context.

The cipher mode that is especially flagged by this defect is the Electronic Code Book (ECB) mode.

### Risk

The ECB mode does not support protection against dictionary attacks.

An attacker can decrypt your data even using brute force attacks.

### Fix

Use a cipher mode more secure than ECB.

For instance, the Cipher Block Chaining (CBC) mode protects against dictionary attacks by:

- XOR-ing each block of data with the encrypted output from the previous block.
- XOR-ing the first block of data with a random initialization vector (IV).

## Examples

### Use of ECB Mode

```
#include <openssl/evp.h>
```

```
#include <stdlib.h>

void func(unsigned char *key, unsigned char *iv) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);
    const EVP_CIPHER * ciph = EVP_aes_128_ecb();
    EVP_EncryptInit_ex(ctx, ciph, NULL, key, iv);
}
```

In this example, the routine `EVP_aes_128_ecb()` invokes the Advanced Encryption Standard (AES) algorithm in the Electronic Code Book (ECB) mode. The ECB mode does not support protection against dictionary attacks.

One possible correction is to use the Cipher Block Chaining (CBC) mode instead.

```
#include <openssl/evp.h>
#include <stdlib.h>

void func(unsigned char *key, unsigned char *iv) {
    EVP_CIPHER_CTX *ctx = EVP_CIPHER_CTX_new();
    EVP_CIPHER_CTX_init(ctx);
    const EVP_CIPHER * ciph = EVP_aes_128_cbc();
    EVP_EncryptInit_ex(ctx, ciph, NULL, key, iv);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** `CRYPTO_CIPHER_WEAK_MODE`

**Impact:** Medium

**CWE ID:** 310, 326, 327

## See Also

### Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2017a**

# Weak padding for RSA algorithm

Context used in encryption or signing operation is associated with insecure padding type

## Description

**Weak padding for RSA algorithm** occurs when you perform RSA encryption or signature by using a context object that was previously associated with a weak padding scheme.

For instance, you perform encryption by using a context object that is associated with the PKCS#1v1.5 padding scheme. The scheme is considered insecure and has already been broken.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_PADDING);  
...  
ret = EVP_PKEY_encrypt(ctx, out, &out_len, in, in_len)
```

## Risk

Padding schemes remove determinism from the RSA algorithm and protect RSA operations from certain kinds of attacks. Padding schemes such as PKCS#1v1.5, ANSI X9.31, and SSLv23 are known to be vulnerable. Do not use these padding schemes for encryption or signature operations.

## Fix

Before performing an RSA operation, associate the context object with a strong padding scheme.

- Encryption: Use the OAEP padding scheme.

For instance, use the `EVP_PKEY_CTX_set_rsa_padding` function with the argument `RSA_PKCS1_OAEP_PADDING` or the `RSA_padding_add_PKCS1_OAEP` function.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_OAEP_PADDING);
```

You can then use functions such as `EVP_PKEY_encrypt` / `EVP_PKEY_decrypt` or `RSA_public_encrypt` / `RSA_private_decrypt` on the context.

- Signature: Use the RSA-PSS padding scheme.

For instance, use the `EVP_PKEY_CTX_set_rsa_padding` function with the argument `RSA_PKCS1_PSS_PADDING`.

```
ret = EVP_PKEY_CTX_set_rsa_padding(ctx, RSA_PKCS1_PSS_PADDING);
```

You can then use functions such as the `EVP_PKEY_sign`-`EVP_PKEY_verify` pair or the `RSA_private_encrypt`-`RSA_public_decrypt` pair on the context.

## Examples

### Encryption with PKCS#1v1.5 Padding

```
#include <stddef.h>
#include <openssl/rsa.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)

int ret;
unsigned char *out_buf;

int func(unsigned char *src, size_t len, RSA* rsa){
    if (rsa == NULL) fatal_error();

    return RSA_public_encrypt(len, src, out_buf, rsa, RSA_PKCS1_PADDING);
}
```

In this example, the PKCS#1v1.5 padding scheme is used in the encryption step.

Use the OAEP padding scheme for stronger encryption.

```
#include <stddef.h>
#include <openssl/rsa.h>
#include <openssl/evp.h>

#define fatal_error() exit(-1)
```

```
int ret;
unsigned char *out_buf;

int func(unsigned char *src, size_t len, RSA* rsa){
    if (rsa == NULL) fatal_error();

    return RSA_public_encrypt(len, src, out_buf, rsa, RSA_PKCS1_OAEP_PADDING);
}
```

## Result Information

**Group:** Cryptography

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** CRYPTO\_RSA\_WEAK\_PADDING

**Impact:** Medium

**CWE ID:** 310, 326, 327, 780

## See Also

Incompatible padding for RSA algorithm operation|Missing blinding for RSA algorithm|Missing padding for RSA algorithm|Nonsecure RSA public exponent

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2018a**

## Write without a further read

Variable never read after assignment

### Description

**Write without a further read** occurs when a value assigned to a variable is never read.

For instance, you write a value to a variable and then write a second value before reading the previous value. The first write operation is redundant.

### Risk

Redundant write operations often indicate programming errors. For instance, you forgot to read the variable between two successive write operations or unintentionally read a different variable.

### Fix

Identify the reason why you write to the variable but do not read it later. Look for common programming errors such as accidentally reading a different variable with a similar name.

If you determine that the write operation is redundant, remove the operation.

## Examples

### Write Without Further Read Error

```
void sensor_amplification(void)
{
    extern int getsensor(void);
    int level;

    level = 4 * getsensor();
    /* Defect: Useless write */
}
```

```
}
```

After the variable `level` gets assigned the value `4 * getsensor()`, it is not read.

One possible correction is to use the variable `level` after the assignment.

```
#include <stdio.h>

void sensor_amplification(void)
{
    extern int getsensor(void);
    int level;

    level = 4 * getsensor();

    /* Fix: Use level after assignment */
    printf("The value is %d", level);
}
}
```

The variable `level` is printed, reading the new value.

## Check Information

**Group:** Data flow

**Language:** C | C++

**Default:** On for handwritten code, off for generated code

**Command-Line Syntax:** USELESS\_WRITE

**Impact:** Low

**CWE ID:** 398

**CERT C ID:** DCL22-C, MSC13-C

## See Also

### Polyspace Analysis Options

Find defects (-checkers)

### Polyspace Results

MISRA C:2012 Rule 2.2

## **Topics**

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Writing to const qualified object

Object declared with a `const` qualifier is modified

## Description

**Writing to const qualified object** occurs when you do one of the following:

- Use a `const`-qualified object as the destination of an assignment.
- Pass a `const`-qualified object to a function that modifies the argument.

For instance, the defect can occur in the following situations:

Situation	Risk	Fix
You pass a <code>const</code> -qualified object as first argument of one of the following functions: <ul style="list-style-type: none"> <li>• <code>mkstemp</code></li> <li>• <code>mkostemp</code></li> <li>• <code>mkostemps</code></li> <li>• <code>mkdtemp</code></li> </ul>	These functions replace the last six characters of their first argument with a string. Therefore, they expect a modifiable <code>char</code> array as their first argument.	Pass a non- <code>const</code> object as first argument of the function.
You pass a <code>const</code> -qualified object as the destination argument of one of the following functions: <ul style="list-style-type: none"> <li>• <code>strcpy</code></li> <li>• <code>strncpy</code></li> <li>• <code>strcat</code></li> <li>• <code>memset</code></li> </ul>	These functions modify their destination argument. Therefore, they expect a modifiable <code>char</code> array as their destination argument.	Pass a non- <code>const</code> object as destination argument of the function.

Situation	Risk	Fix
You perform a write operation on a const-qualified object.	The <code>const</code> qualifier implies an agreement that the value of the object will not be modified. By writing to a const-qualified object, you break the agreement. The result of the operation is undefined.	Perform the write operation on a non-const object.

## Examples

### Writing to const-Qualified Object

```
#include <string.h>

const char* buffer = "abcdeXXXXXXX";

void func(char* string) {
    char *ptr = (char*)strchr(buffer, 'X');
    if(ptr)
        strcpy(ptr, string);
}
```

In this example, because `buffer` is const-qualified, `strchr(buffer, 'X')` returns a const-qualified `char*` pointer. When this `char*` pointer is used as the destination argument of `strcpy`, a **Writing to const qualified object** error appears.

One possible correction is to assign the constant string to a non-const object and use the non-const object as destination argument of `strchr`.

```
#include <string.h>

char buffer[] = "abcdeXXXXXXX";

void func(char* string) {
    char *ptr = (char*)strchr(buffer, 'X');
    if(ptr)
        strcpy(ptr, string);
}
```

## Result Information

**Group:** Programming

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** CONSTANT\_OBJECT\_WRITE

**Impact:** High

**CWE ID:** 227, 471, 686

**CERT C ID:** EXP40-C, MSC15-C, STR05-C, STR06-C, STR30-C

**CERT C++ ID:** EXP55-CPP, STR30-C

**ISO/IEC TS 17961 ID:** strmod

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Writing to read-only resource

File initially opened as read only is modified

### Description

**Writing to read-only resource** occurs when you attempt to write to a file that you have opened earlier in read-only mode.

For instance, you open a file using `fopen` with the access mode argument `r`. You write to that file with a function in the `fprintf` family.

### Risk

Writing to a read-only file causes undefined behavior.

### Fix

If you want to write to the file, open the file in a mode that is suitable for writing.

## Examples

### Writing to Read-Only File

```
#include <stdio.h>

void func(void) {
    FILE* fp ;

    fp = fopen("file.txt", "r");
    fprintf(fp, "Some data");
    fclose(fp);
}
```

In this example, the file `file.txt` is opened in read-only mode. When the `FILE` pointer associated with `file.txt` is used as an argument of `fprintf`, a **Writing to read-only resource** defect occurs.

One possible correction is to use the access specifier `"a"` instead of `"r"`. `file.txt` is now open for output at the end of the file.

```
#include <stdio.h>

void func(void) {
    FILE* fp ;

    fp = fopen("file.txt", "a");
    fprintf(fp, "Some data");
    fclose(fp);
}
```

## Result Information

**Group:** Resource management

**Language:** C | C++

**Default:** On

**Command-Line Syntax:** `READ_ONLY_RESOURCE_WRITE`

**Impact:** High

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2015b**

## Wrong allocated object size for cast

Allocated memory does not match destination pointer

### Description

**Wrong allocated object size for cast** occurs during pointer conversion when the pointer's address is unaligned. If a pointer is converted to a different pointer type, the size of the allocated memory must be a multiple of the size of the destination pointer.

### Examples

#### Dynamic Allocation of Pointers

```
#include <stdlib.h>

void dyn_non_align(void){
    void *ptr = malloc(13);
    long *dest;

    dest = (long*)ptr; //defect
}
```

In this example, the software raises a defect on the conversion of `ptr` to a `long*` in line 5. The dynamically allocated memory of `ptr`, 13 bytes, is not a multiple of the size of `dest`, 4 bytes. This misalignment causes the **Wrong allocated object size for cast** defect.

One possible correction is to use a pointer size that is a multiple of the destination size. In this example, resolve the defect by changing the allocated memory to 12 instead of 13.

```
#include <stdlib.h>

void dyn_non_align(void){
    void *ptr = malloc(12);
    long *dest;
```

```
    dest = (long*)ptr;
}
```

## Static Allocation of Pointers

```
void static_non_align(void){
    char arr[13], *ptr;
    int *dest;

    ptr = &arr[0];
    dest = (int*)ptr; //defect
}
```

In this example, the software raises a defect on the conversion of `ptr` to an `int*` in line 6. `ptr` has a memory size of 13 bytes because the array `arr` has a size of 13 bytes. The size of `dest` is 4 bytes, which is not a multiple of 13. This misalignment causes the **Wrong allocated object size for cast** defect.

One possible correction is to use a pointer size that is a multiple of the destination size. In this example, resolve the defect by changing the size of the array `arr` to a multiple of 4.

```
void static_non_align(void){
    char arr[12], *ptr;
    int *dest;

    ptr = &arr[0];
    dest = (int*)ptr;
}
```

## Allocation with a Function

```
#include <stdlib.h>

void *my_alloc(int size) {
    void *ptr_func = malloc(size);
    if(ptr_func == NULL) exit(-1);
    return ptr_func;
}

void fun_non_align(void){
    int *dest1;
    char *dest2;
```

```
    dest1 = (int*)my_alloc(13); //defect
    dest2 = (char*)my_alloc(13); //not a defect
}
```

In this example, the software raises a defect on the conversion of the pointer returned by `my_alloc(13)` to an `int*` in line 11. `my_alloc(13)` returns a pointer with a dynamically allocated size of 13 bytes. The size of `dest1` is 4 bytes, which is not a divisor of 13. This misalignment causes the **Wrong allocated object size for cast** defect. In line 12, the same function call, `my_alloc(13)`, does not call a defect for the conversion to `dest2` because the size of `char*`, 1 byte, a divisor of 13.

One possible correction is to use a pointer size that is a multiple of the destination size. In this example, resolve the defect by changing the argument for `my_alloc` to a multiple of 4.

```
#include <stdlib.h>

void *my_alloc(int size) {
    void *ptr_func = malloc(size);
    if(ptr_func == NULL) exit(-1);
    return ptr_func;
}

void fun_non_align(void){
    int *dest1;
    char *dest2;

    dest1 = (int*)my_alloc(12);
    dest2 = (char*)my_alloc(13);
}
```

## Check Information

**Group:** Static Memory

**Language:** C | C++

**Default:** Off

**Command-Line Syntax:** OBJECT\_SIZE\_MISMATCH

**Impact:** High

**CWE ID:** 704

**CERT C ID:** EXP36-C, MEM02-C, STR38-C

**CERT C++ ID:** EXP36-C, STR38-C  
**ISO/IEC TS 17961 ID:** ALIGNCONV, INSUFMEM

## See Also

### **Polyspace Analysis Options**

Find defects (-checkers)

### **Polyspace Results**

Unreliable cast of pointer

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

## Wrong type used in sizeof

sizeof argument does not match pointed type

### Description

**Wrong type used in sizeof** occurs when both of the following conditions hold:

- You assign the address of a block of memory to a pointer, or transfer data between two blocks of memory. The assignment or copy uses the `sizeof` operator.

For instance, you initialize a pointer using `malloc(sizeof(type))` or copy data between two addresses using `memcpy(destination_ptr, source_ptr, sizeof(type))`.

- You use an incorrect type as argument of the `sizeof` operator. You use the pointer type instead of the type that the pointer points to.

For instance, to initialize a `type*` pointer, you use `malloc(sizeof(type*))` instead of `malloc(sizeof(type))`.

### Rationale

Irrespective of what `type` stands for, the expression `sizeof(type*)` always returns a fixed size. The size returned is the pointer size on your platform in bytes. The appearance of `sizeof(type*)` often indicates an unintended usage. The error can cause allocation of a memory block that is much smaller than what you need and lead to weaknesses such as buffer overflows.

For instance, assume that `structType` is a structure with ten `int` variables. If you initialize a `structType*` pointer using `malloc(sizeof(structType*))` on a 32-bit platform, the pointer is assigned a memory block of four bytes. However, to be allocated completely for one `structType` variable, the `structType*` pointer must point to a memory block of `sizeof(structType) = 10 * sizeof(int)` bytes. The required size is much greater than the actual allocated size of four bytes.

## Fix

To initialize a *type\** pointer, replace `sizeof(type*)` in your pointer initialization expression with `sizeof(type)`.

## Examples

### Allocate a Char Array With sizeof

```
#include <stdlib.h>

void test_case_1(void) {
    char* str;

    str = (char*)malloc(sizeof(char*) * 5);
    free(str);
}
```

In this example, memory is allocated for the character pointer `str` using a `malloc` of five char pointers. However, `str` is a pointer to a character, not a pointer to a character pointer. Therefore the `sizeof` argument, `char*`, is incorrect.

One possible correction is to match the argument to the pointer type. In this example, `str` is a character pointer, therefore the argument must also be a character.

```
#include <stdlib.h>

void test_case_1(void) {
    char* str;

    str = (char*)malloc(sizeof(char) * 5);
    free(str);
}
```

## Check Information

**Group:** Programming

**Language:** C | C++

**Default:** On for handwritten code, off for generated code

**Command-Line Syntax:** PTR\_SIZEOF\_MISMATCH

**Impact:** High

**CWE ID:** 467

**CERT C ID:** ARR00-C, ARR01-C, MEM02-C, MEM35-C

**CERT C++ ID:** MEM35-C

**ISO/IEC TS 17961 ID:** insufmem

## See Also

Find defects (-checkers)

## Topics

“Interpret Polyspace Bug Finder Results”

“Address Polyspace Results Through Bug Fixes or Comments”

**Introduced in R2013b**

# Functions, Properties, Classes, and Apps

---

## pslinkfun

Manage model analysis at the command line

### Syntax

```
pslinkfun('annotations','type',typeValue,'kind',kindValue,  
Name,Value)
```

```
pslinkfun('openresults',systemName)
```

```
pslinkfun('settemplate',psprjFile)  
prjTemplate = pslinkfun('gettemplate')
```

```
pslinkfun('advancedoptions')  
pslinkfun('enablebacktomodel')  
pslinkfun('help')  
pslinkfun('metrics')  
pslinkfun('jobmonitor')  
pslinkfun('stop')
```

### Description

`pslinkfun('annotations','type',typeValue,'kind',kindValue,Name,Value)` adds an annotation of type `typeValue` and kind `kindValue` to the selected block in the model. You can specify a different block using a `Name,Value` pair argument. You can also add notes about a severity classification, an action status, or other comments using `Name,Value` pairs.


In the generated code associated with the annotated block, Polyspace adds code comments before and after the lines of code. Polyspace reads these comments and marks Polyspace results of the specified `kind` with the annotated information.

Syntax limitations:

- You can have only one annotation per block. If a block produces both a rule violation and an error, you can annotate only one type.

- Even though you apply annotations to individual blocks, the scope of the annotation can be larger. The generated code from one block can overlap with another, causing the annotation to also overlap.

For example, consider this model. The first summation block has a Polyspace annotation, but the second does not.

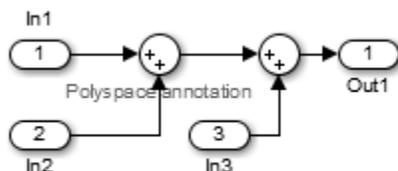

However, the associated generated code adds all three inputs in one line of code.

```
/* polyspace:begin<RTE:OVFL:Medium:To Fix>*/
annotate_y.Out1=(annotate_u.In1+annotate_u.In2)+annotate_u.In3;
/* polyspace:end<RTE:OVFL:Medium:To Fix> */
```

Therefore, the annotation justifies both summations.

`pslinkfun('openresults',systemName)` opens the Polyspace results associated with the model or subsystem `systemName` in the Polyspace environment.

`pslinkfun('settemplate',psprjFile)` sets the configuration file for new verifications.

`prjTemplate = pslinkfun('gettemplate')` returns the template configuration file used for new analyses.

`pslinkfun('advancedoptions')` opens the advanced verification options window to configure additional options for the current model.

`pslinkfun('enablebacktomodel')` enables the back-to-model feature of the Simulink plug-in. If your Polyspace results do not properly link to back to the model blocks, run this command.

`pslinkfun('help')` opens the Polyspace documentation in a separate window. Use this option for only pre-R2013b versions of MATLAB.

`pslinkfun('metrics')` opens the Polyspace Metrics interface.

`pslinkfun('jobmonitor')` opens the Polyspace Job Monitor to display remote verifications in the queue.

`pslinkfun('stop')` kills the code analysis that is currently running. Use this option for local analyses only.

## Examples

### Annotate a Block and Run a Polyspace Bug Finder Analysis

Use the Polyspace annotation function to annotate a block and see the annotation in the analysis results.

In the example model `WhereAreTheErrors`, add an annotation to the switch block for MISRA C rule 13.7 violations with a comment, a severity, and a status.

```
model = 'WhereAreTheErrors';
open(model)
pslinkfun('annotations','type','Misra-C','kind','13.7','block',...
         'WhereAreTheErrors/Switch1','status','to fix','comment','must fix')
```

In the open model, you can see a Polyspace annotation added to the Switch block.

Generate code for the model and run an analysis. After the analysis is finished, open the results in the Polyspace environment:

```
slbuild(model)
opts = pslinkoptions(model);
opts.VerificationMode = 'BugFinder';
opts.VerificationSettings = 'PrjConfigAndMisra';
pslinkrun(model,opts)
pslinkfun('openresults',model)
```

The five MISRA C 13.7 rule violations are annotated with the information you added to the switch block. The annotations appear in the **Status** and **Comment** columns.

### Add Batch Options to Default Configuration Template

Change advanced Polyspace options and set the new configuration as a template.

Load the model `WhereAreTheErrors` and open the advanced options window.

```
model = 'WhereAreTheErrors';
load_system(model)
pslinkfun('advancedoptions')
```

In the **Run Settings** pane, select the options **Run Bug Finder analysis on a remote cluster** and **Upload results to Polyspace Metrics**.

Set the configuration template for new Polyspace analyses to have these options.

```
pslinkfun('settemplate',fullfile(cd,'pslink_config',...
    'WhereAreTheErrors_config.psprj'))
```

View the current Polyspace template.

```
template = pslinkfun('gettemplate')

template =
C:\ModelLinkDemo\pslink_config\WhereAreTheErrors_config.psprj
```

## View Polyspace Queue and Metrics

Run a remote analysis, view the analysis in the queue, and review the metrics.

Before performing this example, check that your Polyspace configuration is set up for remote analysis and Polyspace Metrics.

Build the model `WhereAreTheErrors`, create a Polyspace options object, set the verification mode, and open the advanced options window.

```
model = 'WhereAreTheErrors';
load_system(model)
slbuild(model)
opts = pslinkoptions(model);
opts.VerificationMode = 'BugFinder';
pslinkfun('advancedoptions')
```

In the **Run Settings** pane, select the options **Run Bug Finder analysis on a remote cluster** and **Upload results to Polyspace Metrics**.

Run Polyspace, then open the Job Monitor to monitor your remote job.

```
pslinkrun(model,opts)
pslinkfun('jobmonitor')
```

After your job is finished, open the metrics server to see your job in the repository.

```
pslinkfun('metrics')
```

## Input Arguments

### **typeValue** — type of result

'DEFECT' | 'MISRA-C' | 'MISRA-AC-AGC' | 'MISRA-CPP' | 'JSF'

The type of result with which to annotate the block, specified as:

- 'DEFECT' for defects.
- 'MISRA-C' for MISRA C coding rule violations (C code only).
- 'MISRA-AC-AGC' for MISRA C coding rule violations (C code only).
- 'MISRA-CPP' for MISRA C++ coding rule violations (C++ code only).
- 'JSF' for JSF C++ coding rule violations (C++ code only).

Example: 'type', 'MISRA-C'

### **kindValue** — specific check or coding rule

check acronym | rule number

The specific check or coding rule specified by the acronym of the check or the coding rule number. For the specific input for each type of annotation, see the following table.

<b>type Value</b>	<b>kind Values</b>
'DEFECT'	Use the abbreviation associated with the type of defect that you want to annotate. For example, 'int_ovfl' - Integer overflow.  For the list of possible checks, see: "Polyspace Bug Finder Results".

<b>type Value</b>	<b>kind Values</b>
'MISRA - C '	Use the rule number that you want to annotate. For example, '2.2'.  For the list of supported MISRA C rules and their numbers, see "MISRA C:2004 and MISRA AC AGC Coding Rules".
'MISRA - AC - AGC '	Use the rule number that you want to annotate. For example, '2.2'.  For the list of supported MISRA C rules and their numbers, see "MISRA C:2004 and MISRA AC AGC Coding Rules".
'MISRA - CPP '	Use the rule number that you want to annotate. For example, '0-1-1'.  For the list of supported MISRA C++ rules and their numbers, see "MISRA C++:2008 Rules".
'JSF '	Use the rule number that you want to annotate. For example, '3'.  For the list of supported JSF C++ rules and their numbers, see "JSF C++ Coding Rules".

Example: `pslinkfun('annotations','type','MISRA-CPP','kind','1-2-3')`

Data Types: char

### **systemName — Simulink model**

system | subsystem

Simulink model specified by the system or subsystem name.

Example: `pslinkfun('openresults','WhereAreTheErrors')`

### **psprjFile — Polyspace project file**

standard Polyspace template (default) | absolute path to .psprj file

Polyspace project file specified as the absolute path to the .psprj project file. If psprjFile is empty, Polyspace uses the standard Polyspace template file. New Polyspace projects start with this project configuration.

```
Example: pslinkfun('settemplate', fullfile(matlabroot, 'polyspace',  
'examples', 'cxx', 'Bug_Finder_Example',  
'Bug_Finder_Example.bf.psprj'));
```

### Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name`, `Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside quotes. You can specify several name and value pair arguments in any order as `Name1, Value1, ..., NameN, ValueN`.

```
Example: 'block', 'MyModel\Sum', 'status', 'to fix'
```

#### **block** — block to be annotated

`gcb` (default) | block name

The block you want to annotate specified by the block name. If you do not use this option, the block returned by the function `gcb` is annotated.

```
Example: 'block', 'MyModel\Sum'
```

#### **class** — severity of the check

'high' | 'medium' | 'low' | 'unset'

Severity of the check specified as `high`, `medium`, `low`, or `unset`.

```
Example: 'class', 'high'
```

#### **status** — action status

'unreviewed' | 'to investigate' | 'to fix' | 'justified' | 'no action planned' | 'not a defect' | 'other'

Action status of the check specified as `unreviewed`, `to investigate`, `to fix`, `justified`, `no action planned`, `not a defect`, or `other`.

```
Example: 'status', 'no action planned'
```

#### **comment** — additional comments

character vector

Additional comments specified as a character vector. The comments provide more information about why the results are justified.

```
Example: 'comment', 'defensive code'
```

## **See Also**

`pslinkrun` | `pslinkoptions` | `gcb`

**Introduced in R2014a**

# pslinkoptions

Create options object to customize Polyspace runs from MATLAB command line

## Syntax

```
opts = pslinkoptions(codegen)
opts = pslinkoptions(model)
opts = pslinkoptions(sfunc)
```

## Description

`opts = pslinkoptions(codegen)` returns an options object with the configuration options for code generated by codegen.

`opts = pslinkoptions(model)` returns an options object with the configuration options for the Simulink model.

`opts = pslinkoptions(sfunc)` returns an options object with the configuration options for the S-Function.

## Examples

### Use a Simulink model to create and edit an options objects

Load `psdemo_model_link_sl` and create a Polyspace® options object from the model:

```
load_system('psdemo_model_link_sl');
model_opt = pslinkoptions('psdemo_model_link_sl')

model_opt =

    ResultDir: 'results_$(ModelName$'
VerificationSettings: 'PrjConfig'
    OpenProjectManager: 1
```

```

    AddSuffixToResultDir: 0
  EnableAdditionalFileList: 0
    AdditionalFileList: {}
    VerificationMode: 'CodeProver'
  EnablePrjConfigFile: 0
    PrjConfigFile: ''
  AddToSimulinkProject: 0
    InputRangeMode: 'DesignMinMax'
    ParamRangeMode: 'None'
    OutputRangeMode: 'None'
    ModelRefVerifDepth: 'All'
  ModelRefByModelRefVerif: 0
    AutoStubLUT: 0
  CxxVerificationSettings: 'PrjConfig'
  CheckConfigBeforeAnalysis: 'OnWarn'

```

The model is already configured for Embedded Coder®, so only the Embedded Coder configuration options appear.

Change the results folder name option and set `OpenProjectManager` to true.

```

model_opt.ResultDir = 'results_v1_$ModelName$';
model_opt.OpenProjectManager = true

model_opt =

    ResultDir: 'results_v1_$ModelName$'
  VerificationSettings: 'PrjConfig'
    OpenProjectManager: 1
  AddSuffixToResultDir: 0
  EnableAdditionalFileList: 0
    AdditionalFileList: {}
    VerificationMode: 'CodeProver'
  EnablePrjConfigFile: 0
    PrjConfigFile: ''
  AddToSimulinkProject: 0
    InputRangeMode: 'DesignMinMax'
    ParamRangeMode: 'None'
    OutputRangeMode: 'None'
    ModelRefVerifDepth: 'All'
  ModelRefByModelRefVerif: 0
    AutoStubLUT: 0

```

```
CxxVerificationSettings: 'PrjConfig'  
CheckConfigBeforeAnalysis: 'OnWarn'
```

### Create and edit an options object for Embedded Coder at the command line

Create a Polyspace® options object called `new_opt` with Embedded Coder® parameters:

```
new_opt = pslinkoptions('ec')  
  
new_opt =  
  
        ResultDir: 'results_ $ModelName$'  
VerificationSettings: 'PrjConfig'  
  OpenProjectManager: 0  
AddSuffixToResultDir: 0  
EnableAdditionalFileList: 0  
  AdditionalFileList: {}  
  VerificationMode: 'CodeProver'  
  EnablePrjConfigFile: 0  
    PrjConfigFile: ''  
AddToSimulinkProject: 0  
  InputRangeMode: 'DesignMinMax'  
  ParamRangeMode: 'None'  
  OutputRangeMode: 'None'  
  ModelRefVerifDepth: 'Current model only'  
ModelRefByModelRefVerif: 0  
  AutoStubLUT: 1  
  CxxVerificationSettings: 'PrjConfig'  
CheckConfigBeforeAnalysis: 'OnWarn'
```

To Follow the progress in the Polyspace interface, set the `OpenProjectManager` option to true. Change the configuration to check for both checks and MISRA C® 2012 coding rule violations:

```
new_opt.OpenProjectManager = true;  
new_opt.VerificationSettings = 'PrjConfigAndMisraC2012'  
  
new_opt =  
  
        ResultDir: 'results_ $ModelName$'  
VerificationSettings: 'PrjConfigAndMisraC2012'  
  OpenProjectManager: 1  
AddSuffixToResultDir: 0
```

```

EnableAdditionalFileList: 0
  AdditionalFileList: {}
  VerificationMode: 'CodeProver'
EnablePrjConfigFile: 0
  PrjConfigFile: ''
AddToSimulinkProject: 0
  InputRangeMode: 'DesignMinMax'
  ParamRangeMode: 'None'
  OutputRangeMode: 'None'
  ModelRefVerifDepth: 'Current model only'
ModelRefByModelRefVerif: 0
  AutoStubLUT: 1
CxxVerificationSettings: 'PrjConfig'
CheckConfigBeforeAnalysis: 'OnWarn'

```

### Create and edit an options object for TargetLink at the command line

Create a Polyspace® options object called `new_opt` with TargetLink® parameters:

```
new_opt = pslinkoptions('tl')
```

```
new_opt =
```

```

          ResultDir: 'results_$(modelName$)'
VerificationSettings: 'PrjConfig'
  OpenProjectManager: 0
  AddSuffixToResultDir: 0
EnableAdditionalFileList: 0
  AdditionalFileList: {}
  VerificationMode: 'CodeProver'
EnablePrjConfigFile: 0
  PrjConfigFile: ''
AddToSimulinkProject: 0
  InputRangeMode: 'DesignMinMax'
  ParamRangeMode: 'None'
  OutputRangeMode: 'None'
  AutoStubLUT: 1

```

Set the `OpenProjectManager` option to true to follow the progress in the Polyspace interface. Also change the configuration to check for both run-time errors and MISRA C® coding rule violations:

```
new_opt.OpenProjectManager = true;
new_opt.VerificationSettings = 'PrjConfigAndMisra'

new_opt =

    ResultDir: 'results_$(modelName$)'
    VerificationSettings: 'PrjConfigAndMisra'
    OpenProjectManager: 1
    AddSuffixToResultDir: 0
    EnableAdditionalFileList: 0
    AdditionalFileList: {}
    VerificationMode: 'CodeProver'
    EnablePrjConfigFile: 0
    PrjConfigFile: ''
    AddToSimulinkProject: 0
    InputRangeMode: 'DesignMinMax'
    ParamRangeMode: 'None'
    OutputRangeMode: 'None'
    AutoStubLUT: 1
```

## Input Arguments

### **codegen** — Code generator

'ec' | 'tl'

Code generator, specified as either 'ec' for Embedded Coder® or 'tl' for TargetLink®. Each argument creates a Polyspace options object with properties specific to that code generator.

For a description of all configuration options and their values, see `pslinkoptions`.

Example: `ec_opt = pslinkoptions('ec')`

Example: `tl_opt = pslinkoptions('tl')`

Data Types: char

### **model** — Simulink model name

model name

Simulink model, specified by the model name. Creates a Polyspace options object with the configuration options of that model. If you have not set any options, the object has the

default configuration options. If you have set a code generator, the object has the default options for that code generator.

For a description of all configuration options and their values, see `pslinkoptions`.

Example: `model_opt = pslinkoptions('my_model')`

Data Types: `char`

### **sfunc — path to S-Function**

character vector

Path to S-Function, specified as a character vector. Creates a Polyspace options object with the configuration options for the S-function. If you have not set any options, the object has the default configuration options.

For a description of all configuration options and their values, see `pslinkoptions`.

Example: `sfunc_opt = pslinkoptions('path/to/sfunction')`

Data Types: `char`

## **Output Arguments**

### **opts — Polyspace configuration options**

options object

Polyspace configuration options, returned as an options object. The object is used with `pslinkrun` to run Polyspace from the MATLAB command line.

For the list of object properties, see `pslinkoptions`.

Example: `opts= pslinkoptions('ec')`  
`opts.VerificationSettings = 'Misra'`

## **See Also**

`pslinkfun` | `pslinkrun`

## **Topics**

`pslinkoptions`

**Introduced in R2012a**

# pslinkrun

Run Polyspace analysis on model, system, or S-Function

## Syntax

```
[polyspaceFolder, resultsFolder] = pslinkrun  
[polyspaceFolder, resultsFolder]= pslinkrun(target)  
[polyspaceFolder, resultsFolder] = pslinkrun(target,opts)  
[polyspaceFolder, resultsFolder] = pslinkrun(target,opts,asModelRef)  
[polyspaceFolder, resultsFolder] = pslinkrun('-codegenfolder',  
codegenFolder, opts)
```

## Description

`[polyspaceFolder, resultsFolder] = pslinkrun` analyzes code generated from the current system using the configuration options associated with the current system. It returns the location of the results folder. The current system is the system returned by the command `bdroot`.

`[polyspaceFolder, resultsFolder]= pslinkrun(target)` analyzes `target` with the configuration options associated with the model containing `target`. Before you run an analysis, you must:

- Generate code for models and subsystems.
- Compile S-Functions.

`[polyspaceFolder, resultsFolder] = pslinkrun(target,opts)` analyzes `target` with the configuration options from the options object `opts`. It returns the location of the results folder.

`[polyspaceFolder, resultsFolder] = pslinkrun(target,opts,asModelRef)` uses `asModelRef` to specify which type of generated code to analyze—standalone code or model reference code. This option is useful when you want to analyze only a referenced model instead of an entire model hierarchy.

[polyspaceFolder, resultsFolder] = pslinkrun('-codegenfolder', codegenFolder, opts) runs Polyspace on C/C++ code generated from MATLAB code and stored in codegenFolder.

## Examples

### Analyze Generated Code

Use a Simulink model to generate code, set configuration options, and then run an analysis from the command line.

```
% Generate code from the model WhereAreTheErrors.
model = 'WhereAreTheErrors';
load_system(model);
slbuild(model);

% Create a Polyspace options object from the model.
opts = pslinkoptions(model);

% Set properties that define the Polyspace analysis.
opts.VerificationMode = 'CodeProver';
opts.VerificationSettings = 'PrjConfigAndMisraC2012';

% Run Polyspace using the options object.
[polyspaceFolder, resultsFolder] = pslinkrun(model,opts);
bdclose(model);
```

The results and the corresponding Polyspace project are saved to the results\_WhereAreTheErrors folder, listed in the polyspaceFolder variable. The full path to the results folder is in the resultsFolder variable.

### Analyze Referenced Model Code

Use a Simulink model to generate model reference code, set configuration options, and then run an analysis from the command line.

```
% Generate code from the model WhereAreTheErrors.
% Treat WhereAreTheErrors as if referenced by another model.
```

```

model = 'WhereAreTheErrors';
load_system(model);
slbuild(model, 'ModelReferenceRTWTargetOnly');

% Create a Polyspace options object from the model.
opts = pslinkoptions(model);

% Set properties that define the Polyspace analysis.
opts.VerificationMode = 'CodeProver';
opts.VerificationSettings = 'PrjConfigAndMisraC2012';

% Run Polyspace with the options object.
[polyspaceFolder, resultsFolder] = pslinkrun(model,opts,true);
bdclose(model);

```

The results and corresponding Polyspace project are saved to the `results_mr_WhereAreTheErrors` folder, listed in the `polyspaceFolder` variable. The full path to the results folder is in the `resultsFolder` variable.

## Reuse Analysis Options for Multiple Models

This example shows how to reuse a subset of options for Polyspace analysis of multiple models. Create a generic options object and specify properties that describe the common options. Associate the generic options object with a model-specific options object. Optionally, set some model-specific options and run the Polyspace analysis.

```

% Generate code from the model WhereAreTheErrors.
model = 'psdemo_model_link_sl';
load_system(model);
slbuild(model);

% Create a generic options object to use for multiple model analyses.
opts = polyspace.ModelLinkOptions();
opts.CodingRulesCodeMetrics.EnableMisraC3 = true;
opts.CodingRulesCodeMetrics.MisraC3Subset = 'all';
opts.MergedReporting.ReportOutputFormat = 'PDF';
opts.MergedReporting.EnableReportGeneration = true;

% Create a model-specific options object.
mlopts = pslinkoptions(model);

% Create a project from the generic options object.

```

```
% Associate the project with the model-specific options object.
prjfile = opts.generateProject('model_link_opts');
mlopts.EnablePrjConfigFile = true;
mlopts.PrjConfigFile = prjfile;
mlopts.VerificationMode = 'BugFinder';

% Run Polyspace with the model-specific options object.
[polyspaceFolder, resultsFolder] = pslinkrun(model,mlopts);
bdclose(model);
```

After the analysis completes, results open automatically in the Polyspace interface.

### Analyze C/C++ Code Generated from MATLAB Code

This example shows how to analyze C/C++ code generated from MATLAB code.

```
% Copy demo files into a temporary folder
coderdemo_setup('coderdemo_averaging_filter');

% Generate code
codeName = 'averaging_filter';
codegenFolder = fullfile(pwd, 'codegenFolder');
codegen(codeName, '-config:lib', '-c', '-args', ...
    {zeros(1,100,'double')}, '-d', codegenFolder);

% Configure Polyspace analysis
opts = pslinkoptions('ec');
opts.ResultDir = ['results_',codeName];
opts.OpenProjectManager = 1;

% Run Polyspace
pslinkrun('-codegenfolder', codegenFolder, opts);
```

After the analysis completes, results open automatically in the Polyspace interface.

## Input Arguments

### **target** — Target of the analysis

bdroot (default) | model or system name | path to S-Function block

Target of the analysis specified as a character vector, with the model, system, or S-function in single quotes. The default value is the system returned by `bdroot`.

Example: `[polyspaceFolder, resultsFolder] = pslinkrun('demo')` where `demo` is the name of a model.

Example: `[polyspaceFolder, resultsFolder] = pslinkrun('path/to/sfunction')`

Data Types: `char`

### **opts — Configuration options**

options associated with `target` (default) | options object

Configuration options for the analysis, specified as a Polyspace options object. The function `pslinkoptions` creates an options object. You can customize the options object by changing the `pslinkoption` properties.

Example: `pslinkrun('demo', opts_demo)` where `demo` is the name of a model and `opts_demo` is an options object.

### **asModelRef — Indicator for model reference analysis**

`false` (default) | `true`

Indicator for model reference analysis, specified as `true` or `false`.

- If `asModelRef` is `false` (default), Polyspace analyzes code that is generated as standalone code. This option is equivalent to choosing **Verify Code Generated For > Model** in the Simulink Polyspace options.
- If `asModelRef` is `true`, Polyspace analyzes code that is generated as model referenced code. This option is equivalent to choosing **Verify Code Generated For > Referenced Model** in the Simulink Polyspace options. Specifying model reference code indicates that Polyspace must look for the generated code in a different location from the location for standalone code.

Data Types: `logical`

### **codegenFolder — Folder containing generated C/C++ code**

character vector

Folder containing C/C++ code generated from MATLAB code, specified as a character vector. You specify this folder with the `codegen` command using the flag `-d`.

# Output Arguments

### **polyspaceFolder** — Folder containing Polyspace project and results

character vector

Name of the folder containing Polyspace project and results, specified as a character vector. The default value of this variable is `results_$(modelName)`.

To change this value, see “Output folder” on page 10-18.

### **resultsFolder** — Full path to subfolder containing Polyspace results

character vector

Full path to subfolder containing Polyspace results, specified as a character vector.

The folder `results_$(modelName)` contains your Polyspace project and a subfolder `$(modelName)` with the analysis results. This variable gives you the full path to the subfolder. You can use this path with the `polyspace.BugFinderResults` class.

To change the parent folder `results_$(modelName)`, see “Output folder” on page 10-18.

## See Also

`pslinkfun` | `pslinkoptions` | `pslinkoptions`

## Topics

“Analyze S-Function Code”

“Recommended Model Configuration Parameters for Polyspace Analysis”

**Introduced in R2012a**

# polyspaceBugFinder

Run Polyspace Bug Finder analysis from MATLAB

---

**Note** For easier scripting, run Polyspace® analysis using a `polyspace.Project` object.

---

## Syntax

```
polyspaceBugFinder
polyspaceBugFinder(projectFile)

polyspaceBugFinder(optsObject)
polyspaceBugFinder(projectFile, '-nodesktop')

polyspaceBugFinder(resultsFile)
polyspaceBugFinder('-results-dir', resultsFolder)

polyspaceBugFinder('-help')

polyspaceBugFinder('-sources', sourceFiles)
polyspaceBugFinder('-sources', sourceFiles, Name, Value)
```

## Description

`polyspaceBugFinder` opens Polyspace Bug Finder.

`polyspaceBugFinder(projectFile)` opens a Polyspace project file in Polyspace Bug Finder.

`polyspaceBugFinder(optsObject)` runs an analysis on the Polyspace options object in MATLAB.

`polyspaceBugFinder(projectFile, '-nodesktop')` runs an analysis on the Polyspace project file in MATLAB.

Alternatively, you can use the function `polyspaceBugFinderNoDesktop` with the syntax `polyspaceBugFinderNoDesktop(projectfile)`.

`polyspaceBugFinder(resultsFile)` opens a Polyspace results file in Polyspace Bug Finder.

`polyspaceBugFinder('-results-dir', resultsFolder)` opens a Polyspace results file from `resultsFolder` in Polyspace Bug Finder.

`polyspaceBugFinder('-help')` displays options that can be supplied to the `polyspaceBugFinder` command to run a Polyspace Bug Finder analysis.

`polyspaceBugFinder('-sources', sourceFiles)` runs a Polyspace Bug Finder analysis on the source files specified in `sourceFiles`.

`polyspaceBugFinder('-sources', sourceFiles, Name, Value)` runs a Polyspace Bug Finder analysis on the source files with additional options specified by one or more `Name, Value` pair arguments.

## Examples

### Open Polyspace Projects from MATLAB

This example shows how to open a Polyspace project file with extension `.psprj` from MATLAB. In this example, you open the project file `Bug_Finder_Example.psprj` from the folder `matlabroot\polyspace\examples\cxx\Bug_Finder_Example`.

Open the project `Bug_Finder_Example.psprj` in the Polyspace interface.

```
prjFile = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', ...  
                  'Bug_Finder_Example', 'Bug_Finder_Example.psprj');  
polyspaceBugFinder(prjFile);
```

### Open Polyspace Results from MATLAB

This example shows how to open a Polyspace results file from MATLAB. In this example, you open the results file from the folder `matlabroot\polyspace\examples\cxx\Bug_Finder_Example\Results`.

Open the results of `resFolder`.

```
resFolder = fullfile(matlabroot, 'polyspace', 'examples', ...
    'cxx', 'Bug_Finder_Example', 'Results');
polyspaceBugFinder('-results-dir',resFolder)
```

## Run Polyspace Analysis with Options Object

This example shows how to run a Polyspace analysis from the MATLAB command-line. For this example:

- Save a C source file, `source.c`, in the folder `C:\Polyspace_Sources`.
- Save an include file in the folder `C:\Polyspace_Includes`.

Create an options object and add the source file and include folder to the properties.

```
opts = polyspace.BugFinderOptions;
opts.Sources = {'C:\Polyspace_Sources\source.c'};
opts.EnvironmentSettings.IncludeFolders = {'C:\Polyspace_Includes'};
opts.ResultsDir = 'C:\Polyspace_Results';
```

Polyspace runs on the file `C:\Polyspace_Sources\source.c` and stores the result in `C:\Polyspace_Results`.

Run the analysis and view the results.

```
polyspaceBugFinder(opts);
polyspaceBugFinder('-results-dir',opts.ResultsDir)
```

## Run Polyspace Analysis from MATLAB with DOS/UNIX Options

This example shows how to run a Polyspace analysis in MATLAB. For this example:

- Save a C source file, `source.c`, in the folder `C:\Polyspace_Sources`.
- Save an include file in the folder `C:\Polyspace_Includes`.

To analyze `C:\Polyspace_Sources\source.c`, run the following command.

```
polyspaceBugFinder('-sources', 'C:\Polyspace_Sources\source.c', ...
    '-I', 'C:\Polyspace_Includes', ...
    '-results-dir', 'C:\Polyspace_Results')
```

To view the results, enter:

```
polyspaceBugFinder('-results-dir','C:\')
```

### Run Polyspace Analysis with Coding Rules Checking

This example shows two different ways to customize an analysis in MATLAB. You can customize as many additional options as you want by changing properties in an options object or by using Name-Value pairs. Here you specify checking of MISRA C 2012 coding rules.

Create variables to save the source file path and results folder path. You can use these variables for either analysis method.

```
sourceFileName = fullfile(matlabroot, 'polyspace','examples', 'cxx', ...  
    'Bug_Finder_Example','sources','dataflow.c');  
resFolder1 = fullfile('Polyspace_Results_1');  
resFolder2 = fullfile('Polyspace_Results_2');
```

Analyze coding rules with an options object.

```
opts = polyspace.BugFinderOptions();  
opts.Sources = {sourceFileName};  
opts.ResultsDir = resFolder1;  
opts.CodingRulesCodeMetrics.MisraC3Subset = 'all';  
opts.CodingRulesCodeMetrics.EnableMisraC3 = true;  
polyspaceBugFinder(opts);  
polyspaceBugFinder('-results-dir',resFolder1);
```

Analyze coding rules with DOS/UNIX options.

```
polyspaceBugFinder('-sources',sourceFileName,'-results-dir',resFolder2,...  
    '-misra3','all');  
polyspaceBugFinder('-results-dir',resFolder2);
```

## Input Arguments

### **optsObject** — Polyspace options object name

object handle

Polyspace options object name, specified as the object handle.

To create an options object, use one of the Polyspace options classes.

Example: `opts`

**projectFile — Name of .psprj file**

character vector

Name of project file with extension `.psprj`, specified as a character vector.

If the file is not in the current folder, `projectFile` must include a full or relative path.

Example: `'C:\Polyspace_Projects\myProject.psprj'`

Data Types: `char`

**resultsFile — Name of .psbf file**

character vector

Name of results file with extension `.psbf`, specified as a character vector.

If the file is not in the current folder, `resultsFile` must include a full or relative path.

Example: `'myResults.psbff'`

Data Types: `char`

**resultsFolder — Name of result folder**

character vector

Name of result folder, specified as a character vector. The folder must contain the results file with extension `.psbf`. If the results file resides in a subfolder of the specified folder, this command does not open the results file.

If the folder is not in the current folder, `resultsFolder` must include a full or relative path.

Example: `'C:\Polyspace\Results\'`

Data Types: `char`

**sourceFiles — Comma-separated names of C or C++ files**

character vector

Comma-separated C or C++ source file names, specified as a single character vector.

If the files are not in the current folder, `sourceFiles` must include a full or relative path.

Example: 'myFile.c', 'C:\mySources\myFile1.c,C:\mySources\myFile2.c'

### Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name`, `Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside quotes. You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: '-target','i386','-compiler','gnu4.6' specifies that the source code is intended for a i386 target and contains non-ANSI C syntax for GCC 4.6.

For option names and values, see the **Command-Line Information** section in “Analysis Options”.

### See Also

`polyspace.BugFinderOptions` | `polyspace.ModelLinkBugFinderOptions`

### Topics

“Run Polyspace Analysis by Using MATLAB Scripts”

**Introduced in R2013b**

# polyspaceConfigure

Create Polyspace project from your build system at the MATLAB command line

## Syntax

```
polyspaceConfigure buildCommand
```

```
polyspaceConfigure -option value buildCommand
```

## Description

`polyspaceConfigure buildCommand` traces your build system and creates a Polyspace project with information gathered from your build system.

`polyspaceConfigure -option value buildCommand` traces your build system and uses `-option value` to modify the default operation of `polyspaceConfigure`. Specify the modifiers before `buildCommand`, otherwise they are considered as options in the build command itself.

## Examples

### Create Polyspace Project from Makefile

This example shows how to create a Polyspace project if you use the command `make targetName buildOptions` to build your source code.

Create a Polyspace project specifying a unique project name. Use the `-B` or `-W` `makefileName` option with `make` so that the all prerequisite targets in the makefile are remade.

```
polyspaceConfigure -prog myProject ...  
                    make -B targetName buildOptions
```

Open the Polyspace project in the **Project Browser**.

```
polyspaceBugFinder('myProject.psprj')
```

### Create Projects That Have Different Source Files from Same Build Trace

This example shows how to create different Polyspace projects from the same trace of your build system. You can specify which source files to include for each project.

Trace your build system without creating a Polyspace project by specifying the option `-no-project`. To ensure that all the prerequisite targets in your makefile are remade, use the appropriate make build command option, for instance `-B`.

```
polyspaceConfigure -no-project make -B;
```

`polyspace-configure` stores the cache information and the build trace in default locations inside the current folder. To store the cache information and build trace in a different location, specify the options `-cache-path` and `-build-trace`.

Generate Polyspace projects by using the build trace information from the previous step. Specify a project name and use the `-include-sources` or `-exclude-sources` option to select which files to include for each project.

```
polyspaceConfigure -no-build -prog myProject ...  
-include-sources "glob_pattern";
```

*glob\_pattern* is a glob pattern that corresponds to folders or files you filter in or out of your project. To ensure the shell does not expand the glob patterns you pass to `polyspace-configure`, enclose them in double quotes. For more information on the supported syntax for glob patterns, see “`polyspace-configure` Source Files Selection Syntax”.

If you specified the options `-build-trace` and `-cache-path` in the previous step, specify them again.

Delete the trace file and cache folder.

```
rmdir('polyspace_configure_cache', 's');  
delete polyspace_configure_built_trace;
```

If you used the options `-build-trace` and `-cache-path`, use the paths and file names from those options.

## Run Command-Line Polyspace Analysis from Makefile

This example shows how to run Polyspace analysis if you use the command `make targetName buildOptions` to build your source code. In this example, you use `polyspaceConfigure` to trace your build system but do not create a Polyspace project. Instead you create an options file that you can use to run Polyspace analysis from command-line.

Create a Polyspace options file specifying the `-output-options-file` command. Use the `-B` or `-W makefileName` option with `make` so that all prerequisite targets in the makefile are remade.

```
polyspaceConfigure -output-options-file ...  
                  myOptions make -B targetName buildOptions
```

Use the options file that you created to run a Polyspace analysis at the command line:

```
polyspaceBugFinder -options-file myOptions
```

## Input Arguments

### **buildCommand** — Command for building source code

`build command`

Build command specified exactly as you use to build your source code.

Example: `make -B, make -W makefileName`

### **-option value** — Options for changing default operation of `polyspaceConfigure`

single option starting with `-`, followed by argument | multiple space-separated option-argument pairs

### **Basic Options**

Option	Argument	Description
-prog	Project name	<p>Project name that appears in the Polyspace user interface. The default is <code>polyspace</code>.</p> <p>If you do not use the option <code>-output-project</code>, the <code>-prog</code> argument also sets the project name.</p> <p><b>Example:</b> <code>-prog myProject</code> creates a project that has the name <code>myProject</code> in the user interface. If you do not use the option <code>-output-project</code>, the project name is also <code>myProject.psrprj</code>.</p>
-author	Author name	<p>Name of project author.</p> <p><b>Example:</b> <code>-author jsmith</code></p>
-output-project	Path	<p>Project file name and location for saving project. The default is the file <code>polyspace.psrprj</code> in the current folder.</p> <p><b>Example:</b> <code>-output-project ../myProjects/project1</code> creates a project <code>project1.psrprj</code> in the folder with the relative path <code>../myProjects/</code>.</p>
-output-options-file	File name	<p>Option to create a Polyspace analysis options file. Use this file for command-line analysis using <code>polyspace-bug-finder-nodesktop</code>.</p>
-allow-build-error	None	<p>Option to create a Polyspace project even if an error occurs in the build process.</p> <p>If an error occurs, the build trace log shows the following message:</p> <pre>polyspace-configure ERROR: build command   command_name fail [status=status_value]</pre> <p><code>command_name</code> is the build command name that you use and <code>status_value</code> is the non-zero exit status or error level that indicates which error occurred in your build process.</p>

Option	Argument	Description
-allow-overwrite	None	Option to overwrite a project with the same name, if it exists.  By default, <code>polyspace-configure</code> throws an error if a project with the same name already exists in the output folder. Use this option to overwrite the project.
-silent (default) -verbose	None	Option to suppress or display additional messages from running <code>polyspace-configure</code> .
-help	None	Option to display the full list of <code>polyspace-configure</code> commands
-debug	None	Option used by MathWorks technical support

### Options to Create Multiple Modules

Option	Argument	Description
-module	None	Option to create a separate options file for each binary created in build system.  You can only create separate options files for different binaries. You cannot create multiple modules in a Polyspace project (for running in the Polyspace user interface).  Use this option only for build systems that use GNU and Visual C++ compilers.  See also “Modularize Polyspace Analysis by Using Build Command”.
-output-options-path	Path name	Location where generated options files are saved. Use this option together with the option <code>-module</code> .  The options files are named after the binaries created in the build system.

### Advanced Options

Option	Argument	Description
-compiler-config	Path and file name	<p>Location and name of compiler configuration file.</p> <p>The file must be in a specific format. For guidance, see the existing configuration files in <i>matlabroot\polyspace\configure\compiler_configuration\</i>. For information on the contents of the file, see “Compiler Not Supported for Project Creation from Build Systems”.</p> <p><b>Example:</b> -compiler-configuration myCompiler.xml</p>
-no-project	None	<p>Option to trace your build system without creating a Polyspace project and save the build trace information.</p> <p>Use this option to save your build trace information for a later run of <code>polyspace-configure</code> with the <code>-no-build</code> option.</p>
-no-build	None	<p>Option to create a Polyspace project using previously saved build trace information.</p> <p>To use this option, you must have the build trace information saved from an earlier run of <code>polyspace-configure</code> with the <code>-no-project</code> option.</p> <p>If you use this option, you do not need to specify the <code>buildCommand</code> argument.</p>

Option	Argument	Description
-no-sources	None	<p>Option to create a Polyspace options file that does not contain the source file specifications.</p> <p>Use this option when you intend to specify the source files by other means. For instance, you can use this option when:</p> <ul style="list-style-type: none"> <li>Running Polyspace on AUTOSAR-specific code.</li> </ul> <p>You want to create an options file that traces your build command for the compiler options:</p> <pre>-output-options-file options.txt -no-sources</pre> <p>You later append this options file when extracting source file names from ARXML specifications and running the subsequent Code Prover analysis with the <code>polyspace-autosar</code> Command or <code>polyspaceAutosar</code> function:</p> <pre>-extra-options-file options.txt</pre> <p>See also “Run Polyspace on AUTOSAR Code Using Build Command” (Polyspace Code Prover).</p> <ul style="list-style-type: none"> <li>Running Polyspace in Eclipse™.</li> </ul> <p>Your source files are already specified in your Eclipse project. When running a Polyspace analysis, you want to specify an options file that has the compilation options only.</p>

Option	Argument	Description
-extra-project-options	Options to use for subsequent Polyspace analysis. For instance, "- stubbed-pointers-are-unsafe".	<p>Options that are used for subsequent Polyspace analysis.</p> <p>Once a Polyspace project is created, you can change some of the default options in the project. Alternatively, you can pass these options when tracing your build command. The flag -extra-project-options allows you to pass additional options.</p> <p>Specify multiple options in a space separated list, for instance "-allow-negative-operand-in-shift -stubbed-pointers-are-unsafe".</p> <p>Suppose you have to set the option -stubbed-pointers-are-unsafe for every Polyspace project created. Instead of opening each project and setting the option, you can use this flag when creating the Polyspace project:</p> <pre>-extra-project-options "-stubbed-pointers-are-unsafe"</pre> <p>For the list of options available, see:</p> <ul style="list-style-type: none"> <li>• "Analysis Options"</li> </ul> <p>If you are creating an options file instead of a Polyspace project from your build command, do not use this flag.</p>
-tmp-path	Path	Location of folder where temporary files are stored.
-build-trace	Path and file name	<p>Location and name of file where build information is stored. The default is ./polyspace_configure_build_trace.log.</p> <p><b>Example:</b> -build-trace ../build_info/trace.log</p>

Option	Argument	Description
-include-sources -exclude-sources	Glob pattern	<p>Option to specify which source files <code>polyspace-configure</code> includes in, or excludes from, the generated project. You can combine both options together.</p> <p>A source file is included if the file path matches the glob pattern that you pass to <code>-include-sources</code>.</p> <p>A source file is excluded if the file path matches the glob pattern that you pass to <code>-exclude-sources</code>.</p>
-print-included-sources -print-excluded-sources	None	<p>Option to print the list of source files that <code>polyspace-configure</code> includes in, or excludes from, the generated project. You can combine both options together. The output displays the full path of each file on a separate line.</p> <p>Use this option to troubleshoot the glob patterns that you pass to <code>-include-sources</code> or <code>-exclude-sources</code>. You can see which files match the pattern that you pass to <code>-include-sources</code> or <code>-exclude-sources</code>.</p>

### Cache Control Options

Option	Argument	Description
-no-cache -cache-sources (default) -cache-all-files	None	<p>Option to perform one of the following:</p> <ul style="list-style-type: none"> <li>• Not create a cache</li> <li>• Cache only source and header files.</li> <li>• Cache all files including binaries.</li> </ul>
-cache-path	Path	<p>Location of folder where cache information is stored.</p> <p><b>Example:</b> <code>-cache-path ../cache</code></p>

Option	Argument	Description
- keep - cache - no - keep - cache (default)	None	Option to preserve or clean up cache information after <code>polyspace - configure</code> completes execution.  If <code>polyspace - configure</code> fails, you can provide this cache information to technical support for debugging purposes.

## See Also

### Topics

“Modularize Polyspace Analysis by Using Build Command”

“Requirements for Project Creation from Build Systems”

“Compiler Not Supported for Project Creation from Build Systems”

**Introduced in R2013b**

# polyspaceJobsManager

Manage Polyspace jobs on a MATLAB Distributed Computing Server cluster

## Syntax

```
polyspaceJobsManager('listjobs')
polyspaceJobsManager('cancel','-job',jobNumber)
polyspaceJobsManager('remove','-job',jobNumber)
polyspaceJobsManager('getlog','-job',jobNumber)
polyspaceJobsManager('wait','-job',jobNumber)
polyspaceJobsManager('promote','-job',jobNumber)
polyspaceJobsManager('demote','-job',jobNumber)

polyspaceJobsManager('download','-job',jobNumber)
polyspaceJobsManager('download','-job',jobNumber,'-results-folder',
resultsFolder)

polyspaceJobsManager( ____, '-scheduler', scheduler)
```

## Description

`polyspaceJobsManager('listjobs')` lists all Polyspace jobs in your cluster.

`polyspaceJobsManager('cancel','-job',jobNumber)` cancels the specified job. The job appears in your queue as cancelled.

`polyspaceJobsManager('remove','-job',jobNumber)` removes the specified job from your cluster.

`polyspaceJobsManager('getlog','-job',jobNumber)` displays the log for the specified job.

`polyspaceJobsManager('wait','-job',jobNumber)` pauses until the specified job is done.

`polyspaceJobsManager('promote','-job',jobNumber)` moves the specified job up in the MATLAB job scheduler queue.

`polyspaceJobsManager('demote','-job',jobNumber)` moves the specified job down in the MATLAB job scheduler queue.

`polyspaceJobsManager('download','-job',jobNumber)` downloads the results from the specified job. The results are downloaded to the folder you specified when starting analysis, using the `-results-dir` on page 2-42 option.

`polyspaceJobsManager('download','-job',jobNumber,'-results-folder',resultsFolder)` downloads the results from the specified job to `resultsFolder`.

`polyspaceJobsManager( ____, '-scheduler',scheduler)` performs the specified action on the job scheduler specified. If you do not specify a server with any of the previous syntaxes, Polyspace uses the server stored in your Polyspace preferences.

## Examples

### Manipulate Two Jobs in the Cluster

In this example, use a MJS scheduler to run Polyspace remotely and monitor your jobs through the queue.

Before performing this example, set up an MJS and Polyspace Metrics. This example uses the `myMJS@myCompany.com` scheduler. When you perform this example, replace this scheduler with your own cluster name.

Set up your source files.

```
mkdir 'C:\psdemo\src'  
demo = fullfile(matlabroot,'polyspace','examples','cxx',...  
'Bug_Finder_Example','sources');  
copyfile(demo,'C:\psdemo\src\')
```

Submit two jobs to your scheduler.

```
polyspaceBugFinder -batch -scheduler myMJS@myCompany.com  
-sources C:\psdemo\src\*.c'  
-results-dir 'C:\psdemo\res1'  
polyspaceBugFinder -batch -scheduler myMJS@myCompany.com  
-sources 'C:\psdemo\src\numeric.c'  
-results-dir 'C:\psdemo\res2'
```

```
-add-to-results-repository
polyspaceJobsManager('listjobs', '-scheduler', 'myMJS@myCompany.com')
```

If your jobs have not started running, promote the second job to run before the first job.

```
polyspaceJobsManager('promote', '-job', '20', '-scheduler', ...
    'myMJS@myCompany.com')
```

Job 20 starts running before job 19.

Cancel job 19.

```
polyspaceJobsManager('cancel', '-job', '19', '-scheduler', ...
    'myMJS@myCompany.com')
polyspaceJobsManager('listjobs', '-scheduler', 'myMJS@myCompany.com')
```

Remove job 19.

```
polyspaceJobsManager('remove', '-job', '19', '-scheduler', ...
    'myMJS@myCompany.com')
polyspaceJobsManager('listjobs', '-scheduler', 'myMJS@myCompany.com')
```

Get the log for job 20.

```
polyspaceJobsManager('getlog', '-job', '20', '-scheduler', ...
    'myMJS@myCompany.com')
```

Download the information from job 20.

```
polyspaceJobsManager('download', '-job', '20', '-results-folder', ...
    'C:\psdemo\res3', '-scheduler', 'myCluster')
```

## Input Arguments

### **jobNumber** — Queued job number

character vector of job number

Number of the queued job that you want to manage, specified as a character vector in single quotes.

Example: '-job', '10'

### **resultsFolder** — Path to results folder

character vector

Path to results folder specified as a character vector in single quotes. This folder stores the downloaded results files.

Example: `'-results-folder', 'C:\psdemo\myresults'`

### **scheduler — job scheduler**

head node of your cluster | job scheduler name | cluster profile

Job scheduler for remote verifications specified as one of the following:

- Name of the computer that hosts the head node of your MATLAB Distributed Computing Server cluster (*NodeHost*).
- Name of the MJS on the head node host (*MJSName@NodeHost*).
- Name of a MATLAB cluster profile (*ClusterProfile*).

Example: `'-scheduler', 'myscheduler@mycompany.com'`

## **See Also**

`polyspaceBugFinder`

## **Topics**

“Discover Clusters and Use Cluster Profiles” (Parallel Computing Toolbox)

“Run Polyspace Analysis on Remote Clusters Using Scripts” (Polyspace Code Prover)

**Introduced in R2013b**

# polyspace-configure

(DOS/UNIX) Create Polyspace project from your build system at the DOS or UNIX command line

## Syntax

```
polyspace-configure buildCommand
```

```
polyspace-configure [OPTIONS] buildCommand
```

## Description

`polyspace-configure buildCommand` traces your build system and creates a Polyspace project with information gathered from your build system.

`polyspace-configure [OPTIONS] buildCommand` traces your build system and uses `-option value` to modify the default operation of `polyspace-configure`. Specify the modifiers before `buildCommand`, otherwise they are considered as options in the build command itself.

## Examples

### Create Polyspace Project from Makefile

This example shows how to create a Polyspace project if you use the command `make targetName buildOptions` to build your source code.

Create a Polyspace project specifying a unique project name. Use the `-B` or `-W makefileName` option with `make` so that the all prerequisite targets in the makefile are remade.

```
polyspace-configure -prog myProject \  
make -B targetName buildOptions
```

Open the Polyspace project in the Polyspace user interface.

### Create Projects That Have Different Source Files from Same Build Trace

This example shows how to create different Polyspace projects from the same trace of your build system. You can specify which source files to include for each project.

Trace your build system without creating a Polyspace project by specifying the option `-no-project`. To ensure that all the prerequisite targets in your makefile are remade, use the appropriate make build command option, for instance `-B`.

```
polyspace-configure -no-project make -B
```

`polyspace-configure` stores the cache information and the build trace in default locations inside the current folder. To store the cache information and build trace in a different location, specify the options `-cache-path` and `-build-trace`.

Generate Polyspace projects by using the build trace information from the previous step. Specify a project name and use the `-include-sources` or `-exclude-sources` option to select which files to include for each project.

```
polyspace-configure -no-build -prog myProject \  
-include-sources "glob_pattern"
```

*glob\_pattern* is a glob pattern that corresponds to folders or files you filter in or out of your project. To ensure the shell does not expand the glob patterns you pass to `polyspace-configure`, enclose them in double quotes. For more information on the supported syntax for glob patterns, see “`polyspace-configure` Source Files Selection Syntax”.

If you specified the options `-build-trace` and `-cache-path` in the previous step, specify them again.

Delete the trace file and cache folder.

```
rm -r polyspace_configure_cache polyspace_configure_built_trace
```

If you used the options `-build-trace` and `-cache-path`, use the paths and file names from those options.

## Run Command-Line Polyspace Analysis from Makefile

This example shows how to run Polyspace analysis if you use the command `make targetName buildOptions` to build your source code. In this example, you use `polyspace-configure` to trace your build system but do not create a Polyspace project. Instead you create an options file that you can use to run Polyspace analysis from command-line.

Create a Polyspace options file specifying the `-output-options-file` command. Use the `-B` or `-W makefileName` option with `make` so that all prerequisite targets in the makefile are remade.

```
polyspace-configure -output-options-file\  
myOptions make -B targetName buildOptions
```

Use the options file that you created to run a Polyspace analysis at the command line:

```
polyspace-bug-finder-nodesktop -options-file myOptions
```

## Input Arguments

### **buildCommand** — Command for building source code

`build command`

Build command specified exactly as you use to build your source code.

Example: `make -B, make -W makefileName`

### **[OPTIONS]** — Options for changing default operation of `polyspace-configure`

single option starting with `-`, followed by argument | multiple space-separated option-argument pairs

### **Basic Options**

Option	Argument	Description
-prog	Project name	<p>Project name that appears in the Polyspace user interface. The default is <code>polyspace</code>.</p> <p>If you do not use the option <code>-output-project</code>, the <code>-prog</code> argument also sets the project name.</p> <p><b>Example:</b> <code>-prog myProject</code> creates a project that has the name <code>myProject</code> in the user interface. If you do not use the option <code>-output-project</code>, the project name is also <code>myProject.psrprj</code>.</p>
-author	Author name	<p>Name of project author.</p> <p><b>Example:</b> <code>-author jsmith</code></p>
-output-project	Path	<p>Project file name and location for saving project. The default is the file <code>polyspace.psrprj</code> in the current folder.</p> <p><b>Example:</b> <code>-output-project ../myProjects/project1</code> creates a project <code>project1.psrprj</code> in the folder with the relative path <code>../myProjects/</code>.</p>
-output-options-file	File name	<p>Option to create a Polyspace analysis options file. Use this file for command-line analysis using <code>polyspace-bug-finder-nodesktop</code>.</p>
-allow-build-error	None	<p>Option to create a Polyspace project even if an error occurs in the build process.</p> <p>If an error occurs, the build trace log shows the following message:</p> <pre>polyspace-configure ERROR: build command   command_name fail [status=status_value]</pre> <p><code>command_name</code> is the build command name that you use and <code>status_value</code> is the non-zero exit status or error level that indicates which error occurred in your build process.</p>

Option	Argument	Description
-allow-overwrite	None	Option to overwrite a project with the same name, if it exists.  By default, <code>polyspace-configure</code> throws an error if a project with the same name already exists in the output folder. Use this option to overwrite the project.
-silent (default) -verbose	None	Option to suppress or display additional messages from running <code>polyspace-configure</code> .
-help	None	Option to display the full list of <code>polyspace-configure</code> commands
-debug	None	Option used by MathWorks technical support

### Options to Create Multiple Modules

Option	Argument	Description
-module	None	Option to create a separate options file for each binary created in build system.  You can only create separate options files for different binaries. You cannot create multiple modules in a Polyspace project (for running in the Polyspace user interface).  Use this option only for build systems that use GNU and Visual C++ compilers.  See also “Modularize Polyspace Analysis by Using Build Command”.
-output-options-path	Path name	Location where generated options files are saved. Use this option together with the option <code>-module</code> .  The options files are named after the binaries created in the build system.

### Advanced Options

Option	Argument	Description
-compiler-config	Path and file name	<p>Location and name of compiler configuration file.</p> <p>The file must be in a specific format. For guidance, see the existing configuration files in <i>matlabroot\polyspace\configure\compiler_configuration\</i>. For information on the contents of the file, see “Compiler Not Supported for Project Creation from Build Systems”.</p> <p><b>Example:</b> -compiler-configuration myCompiler.xml</p>
-no-project	None	<p>Option to trace your build system without creating a Polyspace project and save the build trace information.</p> <p>Use this option to save your build trace information for a later run of <code>polyspace-configure</code> with the <code>-no-build</code> option.</p>
-no-build	None	<p>Option to create a Polyspace project using previously saved build trace information.</p> <p>To use this option, you must have the build trace information saved from an earlier run of <code>polyspace-configure</code> with the <code>-no-project</code> option.</p> <p>If you use this option, you do not need to specify the <code>buildCommand</code> argument.</p>

Option	Argument	Description
-no-sources	None	<p>Option to create a Polyspace options file that does not contain the source file specifications.</p> <p>Use this option when you intend to specify the source files by other means. For instance, you can use this option when:</p> <ul style="list-style-type: none"> <li>Running Polyspace on AUTOSAR-specific code.</li> </ul> <p>You want to create an options file that traces your build command for the compiler options:</p> <pre>-output-options-file options.txt -no-sources</pre> <p>You later append this options file when extracting source file names from ARXML specifications and running the subsequent Code Prover analysis with the <code>polyspace-autosar</code> Command or <code>polyspaceAutosar</code> function:</p> <pre>-extra-options-file options.txt</pre> <p>See also “Run Polyspace on AUTOSAR Code Using Build Command” (Polyspace Code Prover).</p> <ul style="list-style-type: none"> <li>Running Polyspace in Eclipse.</li> </ul> <p>Your source files are already specified in your Eclipse project. When running a Polyspace analysis, you want to specify an options file that has the compilation options only.</p>

Option	Argument	Description
-extra-project-options	Options to use for subsequent Polyspace analysis. For instance, "-stubbed-pointers-are-unsafe".	<p>Options that are used for subsequent Polyspace analysis.</p> <p>Once a Polyspace project is created, you can change some of the default options in the project. Alternatively, you can pass these options when tracing your build command. The flag -extra-project-options allows you to pass additional options.</p> <p>Specify multiple options in a space separated list, for instance "-allow-negative-operand-in-shift -stubbed-pointers-are-unsafe".</p> <p>Suppose you have to set the option -stubbed-pointers-are-unsafe for every Polyspace project created. Instead of opening each project and setting the option, you can use this flag when creating the Polyspace project:</p> <pre>-extra-project-options "-stubbed-pointers-are-unsafe"</pre> <p>For the list of options available, see:</p> <ul style="list-style-type: none"> <li>• "Analysis Options"</li> </ul> <p>If you are creating an options file instead of a Polyspace project from your build command, do not use this flag.</p>
-tmp-path	Path	Location of folder where temporary files are stored.
-build-trace	Path and file name	<p>Location and name of file where build information is stored. The default is ./polyspace_configure_build_trace.log.</p> <p><b>Example:</b> -build-trace ../build_info/trace.log</p>

Option	Argument	Description
-include-sources -exclude-sources	Glob pattern	<p>Option to specify which source files <code>polyspace-configure</code> includes in, or excludes from, the generated project. You can combine both options together.</p> <p>A source file is included if the file path matches the glob pattern that you pass to <code>-include-sources</code>.</p> <p>A source file is excluded if the file path matches the glob pattern that you pass to <code>-exclude-sources</code>.</p>
-print-included-sources -print-excluded-sources	None	<p>Option to print the list of source files that <code>polyspace-configure</code> includes in, or excludes from, the generated project. You can combine both options together. The output displays the full path of each file on a separate line.</p> <p>Use this option to troubleshoot the glob patterns that you pass to <code>-include-sources</code> or <code>-exclude-sources</code>. You can see which files match the pattern that you pass to <code>-include-sources</code> or <code>-exclude-sources</code>.</p>

### Cache Control Options

Option	Argument	Description
-no-cache -cache-sources (default) -cache-all-files	None	<p>Option to perform one of the following:</p> <ul style="list-style-type: none"> <li>• Not create a cache</li> <li>• Cache only source and header files.</li> <li>• Cache all files including binaries.</li> </ul>
-cache-path	Path	<p>Location of folder where cache information is stored.</p> <p><b>Example:</b> <code>-cache-path ../cache</code></p>

Option	Argument	Description
- keep - cache - no - keep - cache (default)	None	Option to preserve or clean up cache information after <code>polyspace - configure</code> completes execution.  If <code>polyspace - configure</code> fails, you can provide this cache information to technical support for debugging purposes.

## See Also

### Topics

“Modularize Polyspace Analysis by Using Build Command”

“Requirements for Project Creation from Build Systems”

“Compiler Not Supported for Project Creation from Build Systems”

**Introduced in R2013b**

# polyspace-bug-finder-nodesktop

(DOS/UNIX) Run a Bug Finder analysis from the DOS or UNIX command line

## Syntax

```
polyspace-bug-finder-nodesktop
polyspace-bug-finder-nodesktop -sources sourceFiles [OPTIONS]

polyspace-bug-finder-nodesktop -sources-list-file listOfSources
[OPTIONS]

polyspace-bug-finder-nodesktop -options-file optFile

polyspace-bug-finder-nodesktop -h[elp]
```

## Description

`polyspace-bug-finder-nodesktop [OPTIONS]` runs a Bug Finder analysis if your current folder contains a `sources` subfolder with source files (`.c` or `.cxx` files). The analysis considers files in `sources` and all subfolders under `sources`.

`polyspace-bug-finder-nodesktop -sources sourceFiles [OPTIONS]` runs a Bug Finder analysis on the source file or files `sourceFiles`. You can customize the analysis with additional options.

`polyspace-bug-finder-nodesktop -sources-list-file listOfSources [OPTIONS]` runs a Bug Finder analysis on the source files listed in the text file `listOfSources`. You can customize the analysis with additional options. Using a `sources` list file is recommended when you have many source files. By keeping the list of sources in a text file, the command is shorter and updates to the list are easier.

`polyspace-bug-finder-nodesktop -options-file optFile` runs a Bug Finder analysis with the options specified in the option file. When you have many analysis options, an options file makes it easier to run the same analysis again.

`polyspace-bug-finder-nodesktop -h[elp]` lists a summary of possible analysis options.

## Examples

### Run Analysis by Directly Specifying Options

Run a local Bug Finder analysis by specifying analysis options in the command itself. This example uses source files from the Polyspace Bug Finder example. To run this example, replace *matlabroot* with the path to your MATLAB installation, for example C:\Program Files\MATLAB\R2017a.

Run an analysis on `numerical.c` and `programming.c`, checking for MISRA C:2012 mandatory rules, programming and numerical defects, and using GNU 4.7 compiler settings. This example command is split by ^ characters for readability. In practice, you can put all commands on one line.

```
matlabroot\polyspace\bin\polyspace-bug-finder-nodesktop^  
-sources ^  
matlabroot\polyspace\examples\cxx\Bug_Finder_Example\sources\numerical.c, ^  
matlabroot\polyspace\examples\cxx\Bug_Finder_Example\sources\programming.c ^  
-compiler gnu4.7 -misra3 mandatory -checkers numerical,programming ^  
-author jlittle -prog myProject -results-dir C:\Polyspace_Workspace\Results\
```

Open the results.

```
matlabroot\polyspace\bin\polyspace C:\Polyspace_Workspace\Results\  
ps_results.psbf
```

To rerun the analysis, you must rerun it from the command line.

### Run Local Analysis with Options File

Run a local Bug Finder analysis by specifying analysis options in the command itself. This example uses source files from the Polyspace Bug Finder example. To run this example, replace *matlabroot* with the path to your MATLAB installation, for example C:\Program Files\MATLAB\R2017a.

Save this text to a text file called `myOptionsFile.txt`.

```
# Options for analyzing numerical.c and programming.c  
-sources matlabroot\polyspace\examples\cxx\Bug_Finder_Example\sources\numerical.c  
-sources matlabroot\polyspace\examples\cxx\Bug_Finder_Example\sources\programming.c
```

```
-compiler gnu4.7
-misra3 mandatory
-checkers numerical,programming
-author jlittle
-prog myProject
-results-dir C:\Polyspace_Workspace\Results\
```

Run the analysis with the options specified in the text file.

```
matlabroot\polyspace\bin\polyspace-bug-finder-nodesktop -options-file myOptionsFile.txt
```

Open the results.

```
matlabroot\polyspace\bin\polyspace C:\Polyspace_Workspace\Results\^
ps_results.psbf
```

To rerun the analysis, you must rerun it from the command line.

## Input Arguments

### **sourceFiles** — Comma-separated names of C or C++ files to analyze

```
-sources string
```

Comma-separated C or C++ source file names, specified as `-sources` followed by a string. If the files are not in the current folder (`pwd`), `sourceFiles` must include a full or relative path. For more information, see `-sources`.

If your current folder contains a `sources` subfolder with the source files, you can omit the `-sources` flag. The analysis considers files in `sources` and all subfolders under `sources`.

```
Example: -sources myFile.c, -sources C:\mySources\myFile1.c,C:
\mySources\myFile2.c
```

### **listOfSources** — Text file listing names of C or C++ files to analyze

```
-sources-list-file file
```

Text file which lists the name of C or C++ files, specified as `-sources-list-file` followed by the file. If the files are not in the current folder (`pwd`), `listOfSources` must include a full or relative path. For more information, see `-sources-list-file`.

```
Example: -sources-list-file filename.txt, -sources-list-file "C:
\ps_analysis\source_files.txt"
```

### **[OPTIONS] — Analysis option and corresponding value**

option syntax

Analysis options and their corresponding values, specified by the option name and if applicable value. For syntax specifications, see the individual analysis option reference pages.

Example: `-lang C-CPP -compiler diab`

### **optFile — Text file listing analysis options and values**

`-options-file file`

Text file listing analysis options and values, specified as `-options-file` followed by the file. For more information, see `-options-file`.

Example: `-options-file opts.txt, -options-file "C:\ps_analysis\options.txt"`

## **See Also**

`polyspaceBugFinder`

## **Topics**

“Run Polyspace Analysis from Command Line”

“Run Polyspace Analysis on Remote Clusters Using Scripts”

“Analysis Options”

## **Introduced in R2013b**

# polyspace-report-generator

(DOS/UNIX) Generate reports for Polyspace analysis results stored locally

## Syntax

```
polyspace-report-generator -template <template> [OPTIONS]
polyspace-report-generator -generate-results-list-file [-results-dir
<FOLDER>] [-set-language-english]
polyspace-report-generator -generate-variable-access-file [-results-
dir <FOLDER>] [-set-language-english]
```

## Description

`polyspace-report-generator -template <template> [OPTIONS]` generates a report by using `TEMPLATE` for the local analysis results that you specify with `OPTIONS`.

By default, reports for results from `project-name` are stored as `project-name_report-name` in the `PathToFolder\Polyspace-Doc` folder. `PathToFolder` is the results folder of `project-name`.

`polyspace-report-generator -generate-results-list-file [-results-dir <FOLDER>] [-set-language-english]` exports the analysis results stored locally in `FOLDER` to a tab-delimited text file. The file contains the result information available on the **Results List** pane in the user interface. For more information on the exported results list, see “View Exported Results” .

By default, the results file for results from `project-name` is stored in the `PathToFolder\Polyspace-Doc` folder. `PathToFolder` is the results folder of `project-name`.

`polyspace-report-generator -generate-variable-access-file [-results-dir <FOLDER>] [-set-language-english]` exports the list of global variables in your code from the Code Prover analysis stored locally in `FOLDER` to a tab-delimited text file. The file contains the information available on the **Variable Access** pane in the user interface. For more information on the exported variables list, see “View Exported Variable List” (Polyspace Code Prover).

By default, the variables file for results from `project-name` is stored in the `PathToFolder\Polyspace-Doc` folder. `PathToFolder` is the results folder of `project-name`.

## Input Arguments

### **template** — path to report template file

string

Path to the report template that you use to generate an analysis report. To generate multiple reports, specify a comma-separated list of report template paths (do not put a space after the commas). The templates are available in `matlabroot\toolbox\polyspace\psrptgen\templates` as `.rpt` files. Here, `matlabroot` is the MATLAB installation folder. For more information on the available templates, see `Bug Finder` and `Code Prover report (-report-template)`.

This option is not compatible with `-generate-variable-access-file` and `-generate-results-list-file`.

Example: `C:\Program Files\MATLAB\R2018a\toolbox\polyspace\psrptgen\templates\Developer.rpt`

Example: `TEMPLATE_PATH\BugFinder.rpt,TEMPLATE_PATH\CodeMetrics.rpt`

### **FOLDER** — Analysis results folder path

string

Path to the folder containing analysis results for which you generate a report, or analysis results from which you export a list of results or global variables (`Code Prover`). To generate a report for multiple verifications, specify a comma-separated list of folder paths (do not put a space after the commas). If you do not specify a folder path, the command generates a report for analysis results in the current folder.

Example: `C:\Polyspace_Workspace\My_project\Module_1\results`

Example: `C:\Polyspace_Workspace\My_project\Module_2\results,C:\Polyspace_Workspace\My_project\Module_3\other_results`

### **OPTIONS** — Options for generated report

string

Option	Description
-format <i>HTML</i>   <i>PDF</i>   <i>WORD</i>	<p>File format of the report that you generate. By default, the command generates a WORD document.</p> <p>To generate reports in multiple formats, specify a comma-separated list of formats. (Do not put a space after the commas). For instance, -format PDF,HTML.</p> <p>This option is not compatible with -generate-variable-access-file and -generate-results-list-file.</p>
-output-name <i>outputName</i>	<p>Name of the generated report or folder name if you generate multiple reports.</p> <p>The command stores <i>outputName</i> on the path from which you call the command. To store the generated files in a different folder, specify the full path of the folder, for instance -output-name C:\PathTo\OtherFolder.</p>
-results-dir <i>FOLDER_1, ..., FOLDER_N</i>	<p>Path to the locally stored results folder. To generate reports for multiple analyses, specify a comma-separated list of folder path. (Do not put a space after the commas). For example:</p> <p>-results-dir folderPath1, folderPath2</p>
-set-language-english	<p>Generate the report in English. Use this option if your display language is set to another language.</p>
-h	<p>Display the help information.</p>

## Examples

### Generate PDF Reports for Analysis Results Stored Locally

You can generate multiple reports for analysis results that you store locally.

Create a variable `template_path` to store the path to the report templates and create a variable `report_templates` to store a comma-separated list of templates to use.

```
SET template_path="C:\Program Files"\MATLAB\R2018a\toolbox\polyspace^\psrptgen\templates\bug_finder
SET report_templates=%template_path%\BugFinder.rpt,^
%template_path%\CodingRules.rpt
```

Generate the reports from the templates that you specified in `report_templates` for analysis results of Polyspace project `myProject`.

```
polyspace-report-generator -template %report_templates% ^
-results-dir C:\Polyspace_Workspace\myProject\Module_1\BF_Result ^
-format PDF
```

The command generates two PDF reports, `myProject_BugFinder.PDF` and `myProject_CodingRules.PDF`. The reports are stored in `C:\Polyspace_Workspace\myProject\Module_1\BF_Result\Polyspace-Doc`. For more information on the content of the reports, see `Bug Finder` and `Code Prover report` (`-report-template`).

## See Also

# polyspace-results-repository

(DOS/UNIX) Upload, download and otherwise interact with results in the Polyspace Metrics repository

## Syntax

```
polyspace-results-repository -upload resultsFolder -product
productName -prog projectName -verif-version runNumber [OPTIONS]
```

```
polyspace-results-repository -download resultsFolder -product
productName -prog projectName -verif-version versionNumber [OPTIONS]
```

```
polyspace-results-repository -get-projects-list -product productName
polyspace-results-repository -get-versions-list -product productName
-prog projectName
```

```
polyspace-results-repository -get-run-numbers-list -product
productName -prog projectName -verif-version versionNumber
```

```
polyspace-results-repository -get-files-list -product productName -
prog projectName -verif-version versionNumber [OPTIONS]
```

```
polyspace-results-repository -get-sqo-id -product productName -prog
projectName -verif-version versionNumber [OPTIONS]
```

```
polyspace-results-repository -set-sqo-id SQOLevel -product
productName -prog projectName -verif-version versionNumber [OPTIONS]
```

```
polyspace-results-repository -delete -product productName -prog
projectName -verif-version versionNumber [OPTIONS]
```

```
polyspace-results-repository -rename -product productName -new-prog
newProjectName -new-verif-version newVersionNumber -prog projectName
-verif-version versionNumber [OPTIONS]
```

## Description

```
polyspace-results-repository -upload resultsFolder -product
productName -prog projectName -verif-version runNumber [OPTIONS]
```

uploads Polyspace results in resultsFolder to the Polyspace Metrics web repository.

You can customize the default upload with additional options.

```
polyspace-results-repository -download resultsFolder -product  
productName -prog projectName -verif-version versionNumber [OPTIONS]  
downloads Polyspace results from the Polyspace Metrics web repository to  
resultsFolder.
```

You can customize the default download with additional options.

```
polyspace-results-repository -get-projects-list -product productName  
displays the Bug Finder or Code Prover projects currently in the Polyspace Metrics web  
repository.
```

```
polyspace-results-repository -get-versions-list -product productName  
-prog projectName displays the versions of a project currently in the Polyspace  
Metrics web repository. If the project involves file-by-file verification in Code Prover, add  
the -unit-by-unit option.
```

```
polyspace-results-repository -get-run-numbers-list -product  
productName -prog projectName -verif-version versionNumber displays the  
run numbers of a project version currently in the Polyspace Metrics web repository.
```

The option is useful only if multiple results with the same project name and version number have been uploaded to Polyspace Metrics.

```
polyspace-results-repository -get-files-list -product productName -  
prog projectName -verif-version versionNumber [OPTIONS] displays the files  
involved in the results for a certain project and version.
```

```
polyspace-results-repository -get-sqo-id -product productName -prog  
projectName -verif-version versionNumber [OPTIONS] displays the Software  
Quality Objectives being applied to a certain project and version.
```

```
polyspace-results-repository -set-sqo-id SQOLevel -product  
productName -prog projectName -verif-version versionNumber [OPTIONS]  
applies Software Quality Objectives specified by SQOLevel to a certain project and  
version.
```

```
polyspace-results-repository -delete -product productName -prog  
projectName -verif-version versionNumber [OPTIONS] deletes a certain  
project version from the Polyspace Metrics web repository.
```

`polyspace-results-repository -rename -product productName -new-prog newProjectName -new-verif-version newVersionNumber -prog projectName -verif-version versionNumber [OPTIONS]` renames a certain project version to another project and version.

## Examples

### Upload Results to Polyspace Metrics

Suppose you want to upload Code Prover results from the folder `C:\My_Results` to the Polyspace Metrics server `localhost:12427`. You want the project name to appear as `Polyspace_Project` and the version number `1.0`.

Upload the results using this information.

```
polyspace-results-repository -upload "C:\My_Results" \  
    -prog "Polyspace_Project" \  
    -verif-version "1.0" \  
    -server "localhost:12427" \  
    -product "CodeProver"
```

### Download Results from Polyspace Metrics

Suppose you want to download Bug Finder results in version `1.0` of the project `Polyspace_Project` from the Polyspace Metrics server `localhost:12427`. You want the results to be downloaded to the folder `C:\My_Results`.

Download the results using this information.

```
polyspace-results-repository -download "C:\My_Results" \  
    -prog "Polyspace_Project" \  
    -verif-version "1.0" \  
    -server "localhost:12427" \  
    -product "BugFinder"
```

### Upload Results of Multiple Modules to Polyspace Metrics

If a Polyspace project consists of multiple modules, you can upload the analysis results for all modules to the Polyspace Metrics interface.

For instance, if you run `polyspace-autosar`, a separate module is created for each AUTOSAR Software Component. You can write a shell script (`.sh` file) like this (or a Windows `.bat` file) to collect result files in subfolders of the project folder and upload them to Polyspace Metrics. Code Prover result files use extension `.pscp`.

```
#!/bin/bash
# Upload all results from a polyspace-autosar run to a Metrics server.
MODULES_DIR=`find "$RESULTS_DIR" -name ps_results.pscp -printf '%h\n'`
IFS='
'
for module in $MODULES_DIR; do
    # extract module name from its path foo/bar/behavior_name
    module_name=${module##*AUTOSAR/}
    # transform it to foo.bar.behavior_name
    module_name=${module_name//\//.}
    polyspace-results-repository \
        -f \
        -server localhost \
        -upload "$module" \
        -prog APPLICATION_NAME \
        -module $module_name \
        -verif-version "$RESULTS_VERSION"
done
```

## Input Arguments

### **resultsFolder** — Folder containing Polyspace results

string

Folder name, specified as a string (in double quotes). The folder must contain a Bug Finder result file (`.psbf`) or a Code Prover file (`.pscp`).

Example: "C:\Polyspace\_Projects\Proj1\Module\_1\BF\_Result", "C:\AUTOSAR\Demo\polyspace\AUTOSAR\pkg\tst002\swc002\bhv\verification"

### **projectName** — Name of Polyspace project

string

Name of Polyspace project, as it appears on Polyspace metrics.

Project	Product	Mode	Language	Latest Version	Date	Status
<input type="text"/>						
AUTOSAR	Code Prover	Integration	C	1.1	Dec 20, 2017	completed (PASS2)
Crypto	Bug Finder		C/C++	1.0	Dec 27, 2017	completed

Example: "Polyspace\_project"

**newProjectName — Name of Polyspace project**

string

New name of Polyspace project, as it appears on Polyspace metrics.

Example: "Polyspace\_project\_1"

**versionNumber — Version number of Polyspace project**

string

Version number of Polyspace project, as it appears on the **Runs** tab of Polyspace metrics.

						Projects	Runs
ID	Project	Product <sup>A</sup>	Mode	Language	Version	Date	
<input type="text"/>							
20	AUTOSAR	Code Prover	Integration	C	1.1	Dec 27, 2017	
9	AUTOSAR	Code Prover	Integration	C	1.0	Dec 12, 2017	

Example: "1.0"

**newVersionNumber — Version number of Polyspace project**

string

New version number of Polyspace project, as it appears on the **Runs** tab of Polyspace metrics.

Example: "1.1"

**productName — Name of product used for analysis**

"CodeProver" (default) | "BugFinder"

Name of product used for producing the results, specified as "BugFinder" or "CodeProver".

**SQ0Level — SQO Level or BF-QO Level to be applied to analysis results**

"SQ0-1" | "SQ0-2" | "SQ0-3" | "SQ0-4" | "SQ0-5" | "SQ0-6" | "BF-Q0-1" | "BF-Q0-2" | "BF-Q0-3" | "BF-Q0-4" | "BF-Q0-5" | "BF-Q0-6" | "Exhaustive"

Quality levels applied to analysis results. The quality levels consist of a set of criteria based on which the analysis results are assigned a status of **PASS** or **FAIL**. Use the SQO levels for Code Prover results and BF-QO level for Bug Finder results.

See:

- “Software Quality Objectives” (Polyspace Code Prover)
- “Bug Finder Quality Objective Levels”

**[OPTIONS] — Options to customize upload or download**

option name

Option	Description
-server <i>serverName:portNumber</i>	<p>Explicitly specify a server name and port number for upload or download, for instance, "localhost:12427".</p> <p>By default, results are uploaded to or downloaded from the server that you configured in Polyspace preferences. See “Set Up Polyspace Metrics”.</p>
-f	<p>Use this option in scripts so that the <code>polyspace-results-repository</code> command does not require user interaction.</p> <p>By default, the command asks for confirmation before transferring results from your local folder to Polyspace Metrics or vice versa.</p>
-password <i>password_value</i>	<p>Specify the password for uploading or download a password-protected result in Polyspace Metrics.</p>

Option	Description
<p><code>-module <i>module_name</i></code></p>	<p>Specify that the result belongs to a module in the current Polyspace project. Specify a module name.</p> <p>Use this option to upload results from a project with multiple modules. In Polyspace Metrics, all modules with the same <code>-prog</code> value appear under the same project.</p> <p>When you upload the results of multiple modules in the same project, they appear as separate modules in Polyspace Metrics. When you download the result of a specific module, the result appears in a subfolder of the download folder.</p>
<p><code>-run-number</code></p>	<p>If you uploaded multiple results with the same project name and version number, they appear as separate runs in Polyspace metrics. Use this option to upload or download the results for a specific run.</p>
<p><code>-integration</code> or <code>-unit-by-unit</code></p>	<p>If you run a file-by-file verification, use <code>-unit-by-unit</code> to upload or download all results together. Otherwise, use <code>-integration</code>. For more information on file-by-file verification, see <a href="#">Verify files independently (-unit-by-unit)</a>.</p> <p>By default, the command assumes one result for each upload or download.</p>

**Introduced in R2013b**

# Polyspace Bug Finder

Identify software defects via static analysis

## Description

The **Polyspace Bug Finder** app uses static analysis to quickly find run-time errors, data flow problems, and other defects in C and C++ code.

You can also add check compliance with MISRA C, MISRA C++, JSF++, and custom coding rules.

## Open the Polyspace Bug Finder App

- MATLAB Toolstrip: On the **Apps** tab, under **Code Verification**, click the app icon.
- MATLAB command prompt: Enter `polyspaceBugFinder`.

## Examples

- “Run Polyspace Bug Finder on C/C++ Code”
- “Run Polyspace Analysis from Command Line”

## Programmatic Use

```
polyspaceBugFinder
```

## See Also

**Apps**  
**Polyspace Code Prover**

**Functions**

polyspaceBugFinder | polyspaceConfigure

**Topics**

“Run Polyspace Bug Finder on C/C++ Code”

“Run Polyspace Analysis from Command Line”

“Polyspace Bug Finder”

**Introduced in R2013b**

# polyspace.Project class

**Package:** polyspace

Run Polyspace analysis on C and C++ code and read results

## Description

Run a Polyspace analysis on C and C++ source files by using this MATLAB object.

- To specify source files and customize analysis options, use the `Configuration` property.
- To run the analysis, use the `run` method.
- To read results after analysis, use the `Results` property.

## Construction

`proj = polyspace.Project` creates an object that you can use to configure and run a Polyspace analysis, and then read the analysis results.

## Properties

### Configuration — Analysis options

`polyspace.Options` object

Options for running Polyspace analysis, implemented as a `polyspace.Options` object. The object has properties corresponding to the analysis options. For more information on those properties, see `polyspace.Options`.

You can retain the default options or change them in one of these ways:

- Set the source code language to 'C', 'CPP', or 'C-CPP' (default). Some analysis options might not be available depending on the language setting of the object.

```
proj=polyspace.Project;  
proj.Configuration=polyspace.Options('C');
```

- Modify the properties directly.

```
proj = polyspace.Project;
proj.Configuration.TargetCompiler.Compiler = 'gnu4.9';
```

- Obtain the options from another `polyspace.Project` object.

```
proj1 = polyspace.Project;
proj1.Configuration.TargetCompiler.Compiler = 'gnu4.9';
```

```
proj2 = proj1;
```

To use common analysis options across multiple projects, follow this approach. For instance, you want to reuse all options and change only the source files.

- Obtain the options from a project created in the user interface (.psprj file).

```
proj = polyspace.Project;
projectLocation = fullfile(matlabroot, 'polyspace', ...
    'examples', 'cxx', 'Bug_Finder_Example', 'Bug_Finder_Example.psprj')
proj.Configuration = polyspace.loadProject(projectLocation);
```

To determine the optimal set of options, set your options in the user interface and then import them to a `polyspace.Project` object. In the user interface, you can access help from features such as the Compilation Assistant and get tooltip help on options.

- Obtain the options from a Simulink model. Before obtaining the options, generate code from the model.

```
modelName = 'sldemo_bounce';
load_system(modelName);
```

```
% Set parameters for Embedded Coder target
set_param(modelName, 'SystemTargetFile', 'ert.tlc');
set_param('sldemo_bounce', 'Solver', 'FixedStepAuto');
set_param('sldemo_bounce', 'SupportContinuousTime', 'on')
```

```
% Generate code
rtwbuild(modelName);
```

```
% Obtain configuration from model
proj = polyspace.Project;
proj.Configuration = polyspace.ModelLinkOptions(modelName);
```

Use the options to analyze the code generated from the model.

### Results — Analysis results

`polyspace.BugFinderResults` or `polyspace.CodeProverResults` object

Results of Polyspace analysis. When you create a `polyspace.Project` object, this property is initially empty. The property is populated only after you execute the `run` method of the object. Depending on the argument to the `run` method, `'bugFinder'` or `'codeProver'`, the property is implemented as a `polyspace.BugFinderResults` or `polyspace.CodeProverResults` object.

To read the results, use these methods of the `polyspace.BugFinderResults` or `polyspace.CodeProverResults` object:

- `getSummary`: Obtain a summarized format of the results into a MATLAB table.

```
proj = polyspace.Project;
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', 'examples', ...
    'cxx', 'Code_Prover_Example', 'sources', 'single_file_analysis.c')};
proj.Configuration.ResultsDir = fullfile(pwd, 'results');

proj.run('bugFinder');

resTable = proj.Results.getSummary('defects');
```

For more information, see `polyspace.BugFinderResults.getSummary` or `polyspace.CodeProverResults.getSummary`.

- `getResults`: Obtain the full results or a more readable format into a MATLAB table.

```
proj = polyspace.Project;
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', 'examples', ...
    'cxx', 'Code_Prover_Example', 'sources', 'single_file_analysis.c')};
proj.Configuration.ResultsDir = fullfile(pwd, 'results');

proj.run('bugFinder');

resTable = proj.Results.getResults('readable');
```

For more information, see `polyspace.BugFinderResults.getResults` or `polyspace.CodeProverResults.getResults`.

## Methods

`run` Run a Polyspace analysis

## Examples

### Check for Bugs

Run a Polyspace Bug Finder analysis on the example file `numerical.c`. Configure these options:

- Specify GCC 4.9 as your compiler.
- Save the results in a `results` subfolder of the current working folder.

```
proj = polyspace.Project

% Configure analysis
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', ...
    'examples', 'cxx', 'Bug_Finder_Example', 'sources', 'numerical.c')};
proj.Configuration.TargetCompiler.Compiler = 'gnu4.9';
proj.Configuration.ResultsDir = fullfile(pwd, 'results');

% Run analysis
bfStatus = proj.run('bugFinder');

% Read results
bfSummary = proj.Results.getSummary('defects');
```

### Prove Absence of Run-Time Errors

Run a Polyspace Code Prover analysis on the example file `single_file_analysis.c`. Configure these options:

- Specify GCC 4.9 as your compiler.
- Save the results in a `results` subfolder of the current working folder.
- Specify that a `main` function must be generated, if the function does not exist in the source code.

```
proj = polyspace.Project
```

```
% Configure analysis
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', 'examples', ...
    'cxx', 'Code_Prover_Example', 'sources', 'single_file_analysis.c')};
proj.Configuration.TargetCompiler.Compiler = 'gnu4.9';
proj.Configuration.ResultsDir = fullfile(pwd, 'results');
proj.Configuration.CodeProverVerification.MainGenerator = true;
```

```
% Run analysis
cpStatus = proj.run('codeProver');
```

```
% Read results
cpSummary = proj.Results.getSummary('runtime');
```

### Check for Bugs and MISRA C:2012 Violations

Run a Polyspace Bug Finder analysis on the example file `single_file_analysis.c`. Configure these options:

- Specify GCC 4.9 as your compiler.
- Save the results in a `results` subfolder of the current working folder.
- Enable checking of MISRA C:2012 rules. Check for the mandatory rules only.

```
proj = polyspace.Project
```

```
% Configure analysis
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', ...
    'examples', 'cxx', 'Bug_Finder_Example', 'sources', 'numerical.c')};
proj.Configuration.TargetCompiler.Compiler = 'gnu4.9';
proj.Configuration.ResultsDir = fullfile(pwd, 'results');
proj.Configuration.CodingRulesCodeMetrics.EnableMisraC3 = true;
proj.Configuration.CodingRulesCodeMetrics.MisraC3Subset = 'mandatory';
```

```
% Run analysis
bfStatus = proj.run('bugFinder');
```

```
% Read results
```

```
defectsSummary = proj.Results.getSummary('defects');  
misraSummary = proj.Results.getSummary('misraC2012');
```

## See Also

### Topics

“Run Polyspace Analysis by Using MATLAB Scripts”

“Generate MATLAB Scripts from Polyspace User Interface”

“Troubleshoot Polyspace Analysis from MATLAB”

**Introduced in R2017b**

# polyspace.Options class

**Package:** polyspace

Create object for running Polyspace analysis on handwritten code

---

**Note** For easier scripting, specify the Polyspace® analysis options using the Configuration property of a `polyspace.Project` object. Do not create a `polyspace.Options` object directly.

---

## Description

Run a Polyspace analysis from MATLAB by using an options object. To specify source files and customize analysis options, change the object properties.

To analyze model-generated code, use `polyspace.ModelLinkOptions` instead.

## Construction

`opts = polyspace.Options` creates an object whose properties correspond to options for running a Polyspace analysis.

`proj = polyspace.Project` creates a `polyspace.Project` object. The object has a property `Configuration`, which is a `polyspace.Options` object.

`opts = polyspace.Options(lang)` creates a Polyspace options object with options that are applicable to the language `lang`.

`opts = polyspace.loadProject(projectFile)` creates a Polyspace options object from an existing Polyspace project `projectFile`. You set the options in your project in the Polyspace user interface and create the options object from that project for programmatically running the analysis.

## Input Arguments

### **lang** — Language of analysis

'C-CPP' (default) | 'C' | 'CPP'

The language of the analysis specified as 'C-CPP', 'C', or 'CPP'. This argument determines the object properties.

Data Types: char

### **projectFile** — Name of .psprj file

character vector

Name of Polyspace project file with extension `.psprj`, specified as a character vector.

If the file is not in the current folder, `projectFile` must include a full or relative path. To identify the current folder, use `pwd`. To change the current folder, use `cd`.

Example: 'C:\projects\myProject.psprj'

## Properties

The object properties correspond to the analysis options for Polyspace projects. The properties are organized in the same categories as the Polyspace interface. The property names are a shortened version of the DOS/UNIX command-line name. For syntax details, see `polyspace.Options`.

## Methods

<code>copyTo</code>	Copy common settings between Polyspace options objects
<code>generateProject</code>	Generate psprj project from options object
<code>toScript</code>	Add Polyspace options object definition to a script

## Examples

### Customize and Run Analysis

Create a Polyspace analysis options object and customize the properties. Then, run an analysis.

Create object and customize properties. In case you do not have write access to your current folder, a temporary folder is being used for storing analysis results.

```
sources = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', ...
    'sources', 'numerical.c');
opts = polyspace.Options();
opts.Prog = 'MyProject';
opts.Sources = {sources};
opts.TargetCompiler.Compiler = 'gnu4.7';
opts.ResultsDir = tempname;
```

Run a Bug Finder analysis. To run a Code Prover analysis, use `polyspaceCodeProver` instead of `polyspaceBugFinder`.

```
results = polyspaceBugFinder(opts);
```

Open the results in the Polyspace user interface.

```
polyspaceBugFinder('-results-dir', opts.ResultsDir);
```

### Run Polyspace by Generating a Project File

Create a Polyspace analysis options object and customize the properties. Then, run a Bug Finder analysis.

Create object and customize properties.

```
sources = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', ...
    'sources', 'numerical.c');
opts = polyspace.Options();
opts.Prog = 'MyProject';
opts.Sources = {sources};
opts.TargetCompiler.Compiler = 'gnu4.7';
opts.ResultsDir = tempname;
```

Generate a Polyspace project, name it using the `Prog` property, and open the project in the Polyspace interface.

```
psprj = opts.generateProject(opts.Prog);  
polyspaceBugFinder(psprj);
```

You can also analyze the project from the command line. Run the analysis and open the results in the Polyspace interface.

```
results = polyspaceBugFinder(psprj, '-nodesktop');  
polyspaceBugFinder('-results-dir',opts.ResultsDir);
```

## Alternatives

If you are analyzing code generated from a model, use `polyspace.ModelLinkOptions` instead.

## See Also

[polyspace.ModelLinkOptions](#) | [polyspace.Project](#) | [polyspaceBugFinder](#)

## Topics

“Run Polyspace Analysis by Using MATLAB Scripts”

“Generate MATLAB Scripts from Polyspace User Interface”

**Introduced in R2017a**

## **polyspace.ModelLinkOptions class**

**Package:** polyspace

Create object for running Polyspace analysis on generated code

### **Description**

Run a Polyspace analysis from MATLAB by using an options object. To specify source files and customize analysis options, change the object properties.

This class is intended for model-generated code. If you are analyzing handwritten code, use `polyspace.Options` instead.

### **Construction**

`opts = polyspace.ModelLinkOptions` creates an object whose properties correspond to options for running a Polyspace analysis on generated code.

`opts = polyspace.ModelLinkOptions(lang)` creates a Polyspace options object with options that are applicable to the language `lang`.

`opts = polyspace.ModelLinkOptions(model)` creates a Polyspace options object with options that are applicable to `model`. Prior to extracting options from the model, you must load the model and generate code.

### **Input Arguments**

#### **lang — Language of analysis**

'C-CPP' (default) | 'C' | 'CPP'

The language of the analysis specified as 'C-CPP', 'C', or 'CPP'. This argument determines the object properties.

#### **model — Model or subsystem name**

character vector

Name or path to model or subsystem, specified as a character vector.

Prior to extracting options from the model, you must:

- 1 Load the model. Use `load_system` or `open_system`.
- 2 Generate code from the model. Use `rtwbuild`.

Example: `'psdemo_model_link_sl'`

## Properties

The object properties correspond to the analysis options for Polyspace projects. The properties are organized in the same categories as the Polyspace interface. The property names are a shortened version of the DOS command-line name. For syntax details, see `polyspace.ModelLinkOptions`.

## Methods

<code>copyTo</code>	Copy common settings between Polyspace options objects
<code>generateProject</code>	Generate <code>psprj</code> project from options object
<code>toScript</code>	Add Polyspace options object definition to a script

## Examples

### Script Analysis of Model Generated Code

This example shows how to customize and run an analysis on code generated from a model.

Generate code from the model `sldemo_bounce`. Before code generation, set a system target file appropriate for code analysis. See also “Recommended Model Configuration Parameters for Polyspace Analysis”.

```
modelName = 'sldemo_bounce';  
load_system(modelName);
```

```
% Set parameters for Embedded Coder target
set_param(modelName, 'SystemTargetFile', 'ert.tlc');
set_param('sldemo_bounce', 'Solver', 'FixedStepAuto');
set_param('sldemo_bounce', 'SupportContinuousTime', 'on')

if exist(fullfile(pwd, 'sldemo_bounce_ert_rtw'), 'dir') == 0
    rtwbuild(modelName);
end
```

Associate a `polyspace.ModelLinkOptions` object with the model. A subset of the object properties are set from the configuration parameters associated with the model. The other properties take their default values. For details on the configuration parameters, see “Polyspace Analysis in Simulink”.

```
opts = polyspace.ModelLinkOptions(modelName);
```

Change the property values if needed. For instance, you can specify that the analysis must check for all MISRA C: 2012 violations and generate a PDF report of the results. You can also specify a folder for the analysis results.

```
opts.CodingRulesCodeMetrics.EnableMisraC3 = true;
opts.CodingRulesCodeMetrics.MisraC3Subset = 'all';

opts.MergedReporting.EnableReportGeneration = true;
opts.MergedReporting.ReportOutputFormat = 'PDF';

opts.ResultsDir = 'newResfolder';
```

Create a `polyspace.Project` object. Associate the `Configuration` property of this object to the options that you previously specified.

```
proj = polyspace.Project;
proj.Configuration = opts;
```

Run analysis and open results.

```
cpStatus = proj.run('codeProver');  
proj.Results.getResults('readable');
```

## Alternatives

If you are analyzing handwritten code, use a `polyspace.Project` object directly. Alternatively, use a `polyspace.Options` object.

## See Also

`polyspace.Options` | `polyspace.Project` | `polyspaceBugFinder` | `pslinkrun`

## Topics

“Run Polyspace Analysis by Using MATLAB Scripts”

**Introduced in R2017a**

# polyspace.BugFinderOptions class

**Package:** polyspace

Create Polyspace Bug Finder object for handwritten code

---

**Note** This class is deprecated and will be removed in a future release. Use `polyspace.Options` instead.

---

## Description

Customize a Polyspace Bug Finder analysis from MATLAB by creating a Bug Finder options object. To specify source files and customize analysis options, change the object properties.

If you are analyzing model-generated code, use `polyspace.ModelLinkBugFinderOptions` instead.

## Construction

`opts = polyspace.BugFinderOptions` creates a Bug Finder options object with available options.

`opts = polyspace.BugFinderOptions(lang)` creates a Bug Finder options object with options that are applicable for the language `lang`.

## Input Arguments

**lang — Language of analysis**

'C-CPP' (default) | 'C' | 'CPP'

The language of the analysis specified as 'C-CPP', 'C', or 'CPP'. This argument determines which properties the object has.

## Properties

The object properties are the analysis options for Polyspace Bug Finder projects. The properties are organized in the same categories as the Polyspace interface. The property names are a shortened version of the DOS/UNIX command-line name. For syntax details, see `polyspace.Options`.

## Methods

<code>copyTo</code>	Copy common settings between Polyspace options objects
<code>generateProject</code>	Generate psprj project from options object
<code>toScript</code>	Add Polyspace options object definition to a script

## Examples

### Customize and Run Analysis

Create a Bug Finder analysis options object and customize the properties. Then, run an analysis.

Create object and customize properties.

```
sources = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', ...  
    'sources', 'numerical.c');  
optsBF = polyspace.BugFinderOptions();  
optsBF.Prog = 'MyProject';  
optsBF.Sources = {sources};  
optsBF.TargetCompiler.Compiler = 'gnu4.7';  
optsBF.ResultsDir = tempname;
```

Run the analysis and open the results in the Polyspace interface.

```
results = polyspaceBugFinder(optsBF);  
polyspaceBugFinder('-results-dir', optsBF.ResultsDir);
```

### Run Polyspace by Generating a Project File

Create a Bug Finder analysis options object and customize the properties. Then, run an analysis.

Create object and customize properties.

```
sources = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', ...  
    'sources', 'numerical.c');  
optsBF = polyspace.BugFinderOptions();  
optsBF.Prog = 'MyProject';  
optsBF.Sources = {sources};  
optsBF.TargetCompiler.Compiler = 'gnu4.7';  
optsBF.ResultsDir = tempname;
```

Generate a Polyspace project, name it using the Prog property, and open the project in the Polyspace interface.

```
psprj = generateProject(optsBF, optsBF.Prog);  
polyspaceBugFinder(psprj);
```

Run the analysis and open the results in the Polyspace interface.

```
results = polyspaceBugFinder(psprj, '-nodesktop');  
polyspaceBugFinder('-results-dir', optsBF.ResultsDir);
```

## Alternatives

If you are analyzing code generated from a model, use `polyspace.ModelLinkBugFinderOptions` instead.

## See Also

`polyspace.ModelLinkBugFinderOptions` | `polyspace.Options` | `polyspaceBugFinder`

## Topics

“Run Polyspace Analysis by Using MATLAB Scripts”

**Introduced in R2016b**

# polyspace.ModelLinkBugFinderOptions class

**Package:** polyspace

Create Polyspace Bug Finder object for generated code

---

**Note** This class is deprecated and will be removed in a future release. Use `polyspace.ModelLinkOptions` instead.

---

## Description

Customize a Polyspace Bug Finder analysis from MATLAB by creating a Bug Finder options object. To specify source files and customize analysis options, change the object properties.

This class is intended for model-generated code. If you are analyzing handwritten code, use `polyspace.BugFinderOptions` instead.

## Construction

`opts = polyspace.BugFinderOptions` creates a Bug Finder options object for generated code with available options for C/C++ generated code.

## Properties

The object properties are the analysis options for Polyspace Bug Finder model link projects. The properties are organized in the same categories as the Polyspace interface. The property names are a shortened version of the DOS command-line name. For syntax details, see `polyspace.ModelLinkOptions`.

## Methods

<code>copyTo</code>	Copy common settings between Polyspace options objects
<code>generateProject</code>	Generate psprj project from options object
<code>toScript</code>	Add Polyspace options object definition to a script

## Examples

### Script Analysis of Model Generated Code

This example shows how to customize and run an analysis on model generated code with MATLAB functions and objects.

Create a custom configuration that checks MISRA C 2012 rules and generates a PDF report.

```
opts = polyspace.ModelLinkBugFinderOptions();
opts.CodingRulesCodeMetrics.EnableMisraC3 = true;
opts.CodingRulesCodeMetrics.MisraC3Subset = 'all';
opts.MergedReporting.ReportOutputFormat = 'PDF';
opts.MergedReporting.EnableReportGeneration = true;
```

Generate code from `psdemo_model_link_sl`.

```
model = 'psdemo_model_link_sl';
load_system(model);
slbuild(model);
```

Add the configuration to `pslinkoptions` object.

```
prjfile = opts.generateProject('model_link_opts');
mlopts = pslinkoptions(model);
mlopts.EnablePrjConfigFile = true;
mlopts.PrjConfigFile = prjfile;
mlopts.VerificationMode = 'BugFinder';
```

Run analysis.

```
[polyspaceFolder, resultsFolder] = pslinkrun(model);
```

## Alternatives

If you are analyzing handwritten code, use `polyspace.BugFinderOptions` instead.

## See Also

`polyspace.BugFinderOptions` | `polyspace.ModellinkOptions` |  
`polyspaceBugFinder` | `pslinkrun`

## Topics

“Run Polyspace Analysis by Using MATLAB Scripts”

# polyspace.DefectsOptions class

**Package:** polyspace

Create custom list of defects to check

## Description

Create a custom list of defects to check. This object is useful if you want to check only a custom subset of the Bug Finder defects. To use your custom list of defects in an analysis, you must add it to a `polyspace.BugFinderOptions` or `polyspace.ModelLinkBugFinderOptions` object. In your Bug Finder options object, set the following properties:

- Add your defect options object to the `BugFinderAnalysis.CheckersList` property.
- Change the `BugFinderAnalysis.CheckersPreset` property to 'custom'.

## Construction

`defectList = polyspace.DefectsOptions` creates the defect options object `defectList`. You can customize the list of active defects by changing the properties.

## Properties

An object is created with supported defects as properties. The defects are listed by their command-line name, found on the individual defect reference pages.

By default, all defects are off. To turn on a defect, set the defect to true. For example:

```
defectList.FLOAT_ZERO_DIV = true
```

## Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects (MATLAB).

## Examples

### Customize List of Defects to Check

Use a `polyspace.DefectsOptions` object to customize the list of defects checked during a Polyspace Bug Finder analysis.

Create options objects.

```
defects = polyspace.DefectsOptions;  
opts = polyspace.Options;
```

Set Bug Finder object properties to analyze with the customized defect list.

```
opts.BugFinderAnalysis.CheckersList = defects;  
opts.BugFinderAnalysis.CheckersPreset = 'custom';
```

Activate the numerical defects.

```
defects.FLOAT_ZERO_DIV = true;  
defects.INT_ZERO_DIV = true;  
defects.FLOAT_ABSORPTION = true;  
defects.BITWISE_NEG = true;  
defects.FLOAT_CONV_OVFL = true;  
defects.FLOAT_OVFL = true;  
defects.INT_CONV_OVFL = true;  
defects.INT_OVFL = true;  
defects.FLOAT_STD_LIB = true;  
defects.INT_STD_LIB = true;  
defects.SHIFT_NEG = true;  
defects.SHIFT_OVFL = true;  
defects.SIGN_CHANGE = true;  
defects.UINT_CONV_OVFL = true;  
defects.UINT_OVFL = true;  
defects.BAD_PLAIN_CHAR_USE = true;
```

### See Also

`polyspace.BugFinderOptions` | `polyspace.CodingRulesOptions` |  
`polyspace.ModelLinkBugFinderOptions`

## **Topics**

“Defects”

**Introduced in R2016b**

# polyspace.GenericTargetOptions class

**Package:** polyspace

Create a generic target configuration

## Description

If your target processor does not match one of the preset targets on page 1-18, use this object to create a custom generic target. To use your custom target in an analysis, you must add it to a `polyspace.BugFinderOptions` or `polyspace.ModelLinkBugFinderOptions` object. In your options object, add your generic target options object to the `TargetCompiler.Target` property.

## Construction

`genericTarget = polyspace.GenericTargetOptions` creates a generic target that you can customize. To specify the size and alignment of types, change the properties of the `genericTarget` object.

## Properties

For more details about any of these properties, see `Generic target options`.

### **Alignment — Largest alignment of struct or array objects**

32 (default) | 16 | 8

Largest alignment of struct or array objects, specified as 32, 16, or 8. Comparable with the DOS/UNIX command-line option `-align`.

Example: `target.Alignment = 8`

### **CharNumBits — Define the number of bits for a char**

8 (default) | 16

Define the number of bits for a char, specified as 8 or 16. Comparable with the DOS/UNIX command-line option `-char-is-16bits`.

Example: `target.CharNumBits = 16`

### **DoubleNumBits — Define the number of bits for a double**

32 (default) | 64

Define the number of bits for a `double`, specified as 32 or 64. Comparable with the DOS/UNIX command-line option `-double-is-64bits`.

Example: `target.DoubleNumBits = 64`

### **Endianness — Endianness of target architecture**

`little` (default) | `big`

Endianness of target architecture, specified as `little` or `big`. Comparable with the DOS/UNIX command-line options `-little-endian` or `-big-endian`.

Example: `target.Endianness = 'big'`

### **IntNumBits — Define the number of bits for an int**

16 (default) | 32

Define the number of bits for an `int`, specified as 16 or 32. Comparable with the DOS/UNIX command-line option `-int-is-32bits`.

Example: `target.IntNumBits = 32`

### **LongLongNumBits — Define the number of bits for a long long**

32 (default) | 64

Define the number of bits for a `long long`, specified as 32 or 64. Comparable with the DOS/UNIX command-line option `-long-long-is-64bits`.

Example: `target.LongNumBits = 64`

### **LongNumBits — Define the number of bits for a long**

32 (default)

Define the number of bits for a `long`, specified as 32. Comparable with the DOS/UNIX command-line option `-long-is-32bits`.

Example: `target.LongNumBits = 32`

### **PointerNumBits — Define the number of bits for a pointer**

16 (default) | 24 | 32

Define the number of bits for a pointer, specified as 16, 24, or 32. Comparable with the DOS/UNIX command-line options `-pointer-is-24bits` and `-pointer-is-32bits`.

Example: `target.PointerNumBits = 32`

### **ShortNumBits — Define the number of bits for a short**

16 (default) | 8

Define the number of bits for an `int`, specified as 16 or 8. Comparable with the DOS/UNIX command-line option `-short-is-8bits`.

Example: `target.ShortNumBits = 8`

### **SignOfChar — Default sign of plain char**

signed (default) | unsigned

Default sign of plain char, specified as `signed` or `unsigned`. Comparable with the DOS/UNIX command-line option `-default-sign-of-char`.

Example: `target.SignOfChar = 'unsigned'`

## **Copy Semantics**

Value. To learn how value classes affect copy operations, see [Copying Objects \(MATLAB\)](#).

## **Examples**

### **Customize Generic Target Settings**

Use a `polyspace.GenericTargetOptions` object to customize a generic target for your analysis.

Create options objects.

```
target = polyspace.GenericTargetOptions;  
opts = polyspace.Options;
```

Add the custom target to the Bug Finder options object.

```
opts.TargetCompiler.Target = target;
```

Customize the generic target.

```
target.Endianess = 'big';  
target.LongLongNumBits = 64;  
target.ShortNumBits = 8;
```

### See Also

Target processor type (-target) | polyspace.BugFinderOptions |  
polyspace.ModelLinkBugFinderOptions

**Introduced in R2016b**

# polyspace.CodingRulesOptions class

**Package:** polyspace

Create custom list of coding rules to check

## Description

Create a custom list of coding rules to check for one of the supported standard coding rule sets. To use your custom target in an analysis, you must add it to a `polyspace.Options` or `polyspace.ModelLinkOptions` object. In your options object:

- Add your coding rules options object to one of the `CodingRulesCodeMetrics.RULESETSubset` properties.
- Activate your coding rule set with one of the `CodingRulesCodeMetrics.EnableRULESET` properties.

## Construction

`ruleList = polyspace.CodingRulesOptions(RuleSet)` creates the coding rules object `ruleList` for the `RuleSet` coding rule set. Set the active rules in the coding rules object.

## Input Arguments

### **RuleSet — Standard coding rule set**

`misraC` (default) | `misraC2012` | `misraAcAgc` | `misraCpp` | `jsf`

Standard coding rule set specified as one of the coding rule acronyms.

Example: `'misraCpp'`

Data Types: `char`

### Properties

For each coding rule set, an object is created with all supported rules for that rule set. By default, all rules are on. To turn off a rule, set the rule to false. For example:

```
ruleList.rule_20_1 = false
```

### Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects (MATLAB).

### Examples

#### Customize List of Coding Rules to Check

Customize the coding rules that are checked during your analysis by using a coding rules options object.

Create options objects.

```
misraRules = polyspace.CodingRulesOptions('misraC2012');  
opts = polyspace.Options;
```

Add the customized list of coding rules to the Bug Finder options object and activate them.

```
opts.CodingRulesCodeMetrics.MisraC3Subset = misraRules;  
opts.CodingRulesCodeMetrics.EnableMisraC3 = true;
```

Customize the coding rule list by turning off rules 2.1-2.7.

```
misraRules.rule_2_1 = false;  
misraRules.rule_2_2 = false;  
misraRules.rule_2_3 = false;  
misraRules.rule_2_4 = false;  
misraRules.rule_2_5 = false;  
misraRules.rule_2_6 = false;  
misraRules.rule_2_7 = false;
```

## See Also

`polyspace.BugFinderOptions` | `polyspace.ModelLinkBugFinderOptions`

**Introduced in R2016b**

## polyspace.BugFinderResults class

**Package:** polyspace

Read Polyspace Bug Finder results from MATLAB

### Description

Read Polyspace Bug Finder analysis results to MATLAB tables by using this object.

You can obtain a high-level overview or read each individual result, for example, each instance of a defect.

### Construction

`resObj = polyspace.BugFinderResults(resultsFolder)` creates an object for reading a specific set of Bug Finder results into MATLAB tables. Use the object methods to read the results.

`proj = polyspace.Project` creates a `polyspace.Project` object. The object has a property `Results`. If you run a Bug Finder analysis, this property is a `polyspace.BugFinderResults` object.

### Input Arguments

**resultsFolder** — Name of result folder

character vector

Name of result folder, specified as a character vector. The folder must contain the results file with extension `.psbf`. Even if the results file resides in a *subfolder* of the specified folder, it cannot be accessed.

If the folder is not in the current folder, `resultsFolder` must include a full or relative path.

Example: `'C:\Polyspace\Results\'`

## Methods

getSummary	View number of defects organized by defect type
getResults	Read Bug Finder results into MATLAB table

## Examples

### Copy Existing Results to MATLAB Tables

This example shows how to read Bug Finder analysis results from MATLAB.

Copy a demo result set to a temporary folder.

```
resPath = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', ...
    'Module_1', 'BF_Result');
userResPath = tempname;
copyfile(resPath, userResPath);
```

Create the results object.

```
resObj = polyspace.BugFinderResults(userResPath);
```

Read results to MATLAB tables using the object.

```
resSummary = getSummary (resObj);
resTable = getResults (resObj);
```

### Run Analysis and Read Results to MATLAB Tables

Run a Polyspace Bug Finder analysis on the demo file `numerical.c`. Configure these options:

- Specify GCC 4.9 as your compiler.
- Save the results in a `results` subfolder of the current working folder.

```
proj = polyspace.Project
```

```
% Configure analysis
```

```
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', ...
    'examples', 'cxx', 'Bug_Finder_Example', 'sources', 'numerical.c')};
```

```
proj.Configuration.TargetCompiler.Compiler = 'gnu4.9';  
proj.Configuration.ResultsDir = fullfile(pwd, 'results');  
  
% Run analysis  
bfStatus = proj.run('bugFinder');  
  
% Read results  
bfSummary = proj.Results.getResults('readable');
```

## Alternatives

To read Code Prover results from MATLAB, use the class `polyspace.CodeProverResults`.

**Introduced in R2017a**

# pslinkoptions Properties

Properties for the pslinkoptions object

## Description

You can create a pslinkoptions object to customize your analysis at the command-line. Use these properties to specify configuration options, where and how to store results, additional files to include, and data range modes.

## Properties

### Configuration Options

#### VerificationSettings — Coding rule and configuration settings for C code

'PrjConfig' (default) | 'PrjConfigAndMisraAGC' | 'PrjConfigAndMisra' | 'PrjConfigAndMisraC2012' | 'MisraAGC' | 'Misra' | 'MisraC2012'

Coding rule and configuration settings for C code specified as:

- 'PrjConfig' - Inherit options from the project configuration.
- 'PrjConfigAndMisraAGC' - Inherit options from the project configuration and enable MISRA AC AGC rule checking.
- 'PrjConfigAndMisra' - Inherit options from the project configuration and enable MISRA C:2004 rule checking.
- 'PrjConfigAndMisraC2012' - Inherit options from the project configuration and enable MISRA C:2012 guideline checking.
- 'MisraAGC' - Enable MISRA AC AGC rule checking. This option runs only compilation and rule checking.
- 'Misra' - Enable MISRA C:2004 rule checking. This option runs only compilation and rule checking.
- 'MisraC2012' - Enable MISRA C:2012 rule checking. This option runs only compilation and guideline checking.

Example: `opt.VerificationSettings = 'PrjConfigAndMisraC2012'`

### **VerificationMode — Polyspace mode**

'BugFinder' (default) | 'CodeProver'

Polyspace mode specified as 'BugFinder', for a Bug Finder analysis, or 'CodeProver', for a Code Prover verification.

Example: `opt.VerificationMode = 'BugFinder';`

### **EnablePrjConfigFile — Allow a custom configuration file**

false (default) | true

Allows a custom configuration file instead of the default configuration specified as true or false. Use the `PrjConfigFile` option to specify the configuration file.

Example: `opt.EnablePrjConfigFile = true;`

### **PrjConfigFile — Custom configuration file**

' ' (default) | full path to a .psprj file

Custom configuration file to use instead of the default configuration specified by the full path to a `.psprj` file. Use the `EnablePrjConfigFile` option to use this configuration file during your analysis.

Example: `opt.PrjConfigFile = 'C:\Polyspace\config.psprj';`

### **CheckConfigBeforeAnalysis — Configuration check before analysis**

'OnWarn' (default) | 'OnHalt' | 'Off'

This property sets the level of configuration checking done before the analysis starts. The configuration check before analysis is specified as:

- **'Off'** — Checks only for errors. Stops if errors are found.
- **'OnWarn'** — Stops for errors. Displays a message for warnings.
- **'OnHalt'** — Stops for errors and warnings.

Example: `opt.CheckConfigBeforeAnalysis = 'OnHalt';`

## **Results**

### **ResultDir — Results folder name and location**

'C:\Polyspace\_Results\results\_ \$ModelName\$' (default) | folder name | folder path

Results folder name and location specified as the local folder name or the folder path. This folder is where Polyspace writes the analysis results. This folder name can be either an absolute path or a path relative to the current folder. The text `$ModelName$` is replaced with the name of the original model.

Example: `opt.ResultDir = '\results_v1_$ModelName$';`

#### **AddSuffixToResultDir – Add unique number to the results folder name**

false (default) | true

Add unique number to the results folder name specified as true or false. If true, a unique number is added to the end of every new result. Using this option helps you avoid overwriting the previous results folders.

Example: `opt.AddSuffixToResultDir = true;`

#### **OpenProjectManager – Open the Polyspace environment**

false (default) | true

Open the Polyspace environment to monitor the progress of the analysis, specified as true or false. Afterward, you can review the results.

Example: `opt.OpenProjectManager = true;`

#### **AddToSimulinkProject – Add results to the open Simulink project**

false (default) | true

Add your results to the currently open Simulink project, if any, specified as true or false. This option allows you to keep your Polyspace results organized with the rest of your project files. If a Simulink project is not open, the results are not added to a Simulink project.

Example: `opt.AddToSimulinkProject = true;`

#### **Additional Files**

##### **EnableAdditionalFileList – Allow an additional file list**

false (default) | true

Allow an additional file list to be analyzed, specified as true or false. Use with the `AdditionalFileList` option.

Example: `opt.EnableAdditionalFileList = true;`

### **AdditionalFileList — List of additional files to be analyzed**

{0x1 cell} (default) | cell array of files

List of additional files to be analyzed specified as a cell array of files. Use with the `EnableAdditionalFileList` option to add these files to the analysis.

```
Example: opt.AdditionalFileList = {'sources\file1.c', 'sources\file2.c'};
```

Data Types: cell

### **Data Ranges**

#### **InputRangeMode — Enable design range information**

'DesignMinMax' (default) | 'FullRange'

Enable design range information specified as 'DesignMinMax', to use data ranges defined in blocks and workspaces, or 'FullRange', to treat inputs as full-range values.

```
Example: opt.InputRangeMode = 'FullRange';
```

#### **ParamRangeMode — Enable constant parameter values**

'None' (default) | 'DesignMinMax'

Enable constant parameter values, specified as 'None', to use constant parameters values specified in the code, or 'DesignMinMax' to use a range defined in blocks and workspaces.

```
Example: opt.ParamRangeMode = 'DesignMinMax';
```

#### **OutputRangeMode — Enable output assertions**

'None' (default) | 'DesignMinMax'

Enable output assertions specified by 'None', to not apply assertions, or 'DesignMinMax' to apply assertions to outputs using a range defined in blocks and workspace.

```
Example: opt.ParamRangeMode = 'DesignMinMax';
```

### **Embedded Coder Only**

#### **ModelRefVerifDepth — Depth of verification**

'Current model only' (default) | '1' | '2' | '3' | 'All'

Depth of verification specified by the model reference level to which you want to analyze.

*Only for Embedded Coder*

Example: `opt.ModelRefVerifDepth = '3';`

### **ModelRefByModelRefVerif – Model reference analysis mode**

false (default) | true

Model reference analysis mode specified as `false` to verify reference models within the model hierarchy, or `true` to verify referenced models individually.

*Only for Embedded Coder*

Example: `opt.ModelRefByModelRefVerif = true;`

### **CxxVerificationSettings – Coding rule and configuration settings for C++ code**

'PrjConfig' (default) | 'PrjConfigAndMisraCxx' | 'PrjConfigAndJSF' |  
'MisraCxx' | 'JSF'

Coding rule and configuration settings for C++ code specified as:

- 'PrjConfig' - Inherit options from project configuration and run complete analysis.
- 'PrjConfigAndMisraCxx' - Inherit options from project configuration, enable MISRA C++ rule checking, and run complete analysis.
- 'PrjConfigAndJSF' - Inherit options from project configuration, enable JSF rule checking, and run complete analysis.
- 'MisraCxx' - Enable MISRA C++ rule checking, and run compilation phase only.
- 'JSF' - Enable JSF rule checking, and run compilation phase only.

*Only for Embedded Coder*

Example: `opt.CxxVerificationSettings = 'MisraCxx';`

### **TargetLink Only**

#### **AutoStubLUT – Lookup Table code usage**

false (default) | true

Lookup Table code usage, specified as true or false.

- `true` — use Lookup Table code during the analysis.
- `false` — stub Lookup Table code.

*Only for TargetLink*

Example: `opts.AutoStubLUT = true;`

### **See Also**

`pslinkoptions` | `pslinkrun`

# polyspace.Project.Configuration Properties

Customize Polyspace analysis of handwritten code with options object properties

## Description

To customize your Polyspace analysis, use these `polyspace.Options` or `polyspace.Project.Configuration` properties. Each property corresponds to an analysis option on the **Configuration** pane in the Polyspace user interface.

The properties are grouped using the same categories as the **Configuration** pane. This page only shows what values each property can take. For details about:

- The different options, see the analysis option reference pages.
- How to create and use the object, see `polyspace.Options` or `polyspace.Project`.

The same properties are also available with the deprecated classes `polyspace.BugFinderOptions` and `polyspace.CodeProverOptions`.

Each property description below also highlights if the option affects only one of Bug Finder or Code Prover.

---

**Note** Some options might not be available depending on the language setting of the object. You can set the source code language (Language) to 'C', 'CPP' or 'C-CPP' during object creation, but cannot change it later.

---

## Properties

### Advanced

#### **Additional — Additional flags for analysis**

character vector

Additional flags for analysis specified as a character vector.

For more information, see `Other`.

Example: `opts.Advanced.Additional = '-extra-flags -option -extra-flags value'`

### **PostAnalysisCommand — Command or script software should execute after analysis finishes**

character vector

Command or script software should execute after analysis finishes, specified as a character vector.

For more information, see `Command/script to apply after the end of the code verification (-post-analysis-command)`.

Example: `opts.Advanced.PostAnalysisCommand = '"C:\Program Files\perl\win32\bin\perl.exe" "C:\My_Scripts\send_email"'`

### **AutomaticOrangeTester — Run the Automatic Orange Tester**

false (default) | true

*This property affects Code Prover analysis only.*

Run the Automatic Orange Tester after verification, specified as true or false.

For more information, see `Automatic Orange Tester (-automatic-orange-tester)`.

Example: `opts.Advanced.AutomaticOrangeTester = true`

### **AutomaticOrangeTesterLoopMaxIteration — Number of loop iterations after which Automatic Orange Tester considers infinite loop**

1000 (default) | positive integer

*This property affects Code Prover analysis only.*

Number of loop iterations after which Automatic Orange Tester considers the test an infinite loop, specified as a positive integer, maximum of 1000.

For more information, see `Maximum loop iterations (-automatic-orange-tester-loop-max-iteration)`.

Example: `opts.Advanced.AutomaticOrangeTesterLoopMaxIteration = 500`

**AutomaticOrangeTesterTestsNumber — Number of tests that Automatic Orange Tester must run**

500 (default) | positive integer

*This property affects Code Prover analysis only.*

Number of tests that Automatic Orange Tester must run, specified as a positive integer, maximum of 100,000.

For more information, see `Number of automatic tests (-automatic-orange-tester-tests-number)`.

Example: `opts.Advanced.AutomaticOrangeTesterTestsNumber = 1000`

**AutomaticOrangeTesterTimeout — Time in seconds allowed for a single test in Automatic Orange Tester**

5 (default) | positive integer

*This property affects Code Prover analysis only.*

Time in seconds allowed for a single test in Automatic Orange Tester, specified as a positive integer, maximum of 60.

For more information, see `Maximum test time (-automatic-orange-tester-timeout)`.

Example: `opts.Advanced.AutomaticOrangeTesterTimeout = 10`

**BugFinderAnalysis (Affects Bug Finder Only)****CheckersList — List of custom checkers to activate**

polyspace.DefectsOptions object | cell array of defect acronyms

*This property affects Bug Finder analysis only.*

List of custom checkers to activate specified by using the name of a `polyspace.DefectsOptions` object or a cell array of defect acronyms. To use this custom list in your analysis, set `CheckersPreset` to `custom`.

For more information, see `polyspace.DefectsOptions`.

Example: `defects = polyspace.DefectsOptions;  
opts.BugFinderAnalysis.CheckersList = defects`

```
Example: opts.BugFinderAnalysis.CheckersList =  
{'INT_ZERO_DIV', 'FLOAT_ZERO_DIV'}
```

### **CheckersPreset — Subset of Bug Finder defects**

default (default) | all | CERT-rules | CERT-all | ISO-17961 | CWE | custom

*This property affects Bug Finder analysis only.*

Preset checker list, specified as a character vector of one of the preset options: `default`, `all`, or `custom`. To use `custom`, specify a `BugFinderAnalysis.CheckersList`.

For more information, see `Find defects (-checkers)`.

```
Example: opts.BugFinderAnalysis.CheckersPreset = 'all'
```

### **EnableCheckers — Activate defect checking**

true (default) | false

*This property affects Bug Finder analysis only.*

Activate defect checking, specified as `true` or `false`. Setting this property to `false` disables all defects. If you want to disable defect checking but still get results, turn on coding rules checking or code metric checking.

This property is equivalent to the **Find defects** check box in the Polyspace interface.

```
Example: opts.BugFinderAnalysis.EnableCheckers = false
```

### **ChecksAssumption (Affects Code Prover Only)**

#### **AllowNegativeOperandInShift — Allow left shift operations on a negative number**

false (default) | true

*This property affects Code Prover analysis only.*

Allow left shift operations on a negative number, specified as `true` or `false`.

For more information, see `Allow negative operand for left shifts (-allow-negative-operand-in-shift)`.

```
Example: opts.ChecksAssumption.AllowNegativeOperandInShift = true
```

#### **AllowNonFiniteFloats — Incorporate infinities and/or NaNs**

false (default) | true

*This property affects Code Prover analysis only.*

Incorporate infinities and/or NaNs, specified as true or false.

For more information, see Consider non finite floats (-allow-non-finite-floats).

Example: `opts.ChecksAssumption.AllowNonFiniteFloats = true`

**AllowPtrArithOnStruct — Allow arithmetic on pointer to a structure field so that it points to another field**

false (default) | true

*This property affects Code Prover analysis only.*

Allow arithmetic on pointer to a structure field so that it points to another field, specified as true or false.

For more information, see Enable pointer arithmetic across fields (-allow-ptr-arith-on-struct).

Example: `opts.ChecksAssumption.AllowPtrArithOnStruct = true`

**CheckInfinite — Detect floating-point operations that result in infinities**

allow (default) | warn-first | forbid

*This property affects Code Prover analysis only.*

Detect floating-point operations that result in infinities.

To activate this option, specify `ChecksAssumption.AllowNonFiniteFloats`.

For more information, see Infinities (-check-infinite).

Example: `opts.ChecksAssumption.CheckInfinite = 'forbid'`

**CheckNan — Detect floating-point operations that result in NaN-s**

allow (default) | warn-first | forbid

*This property affects Code Prover analysis only.*

Detect floating-point operations that result in NaN-s.

To activate this option, specify `ChecksAssumption.AllowNonFiniteFloats`.

For more information, see NaNs (-check-nan).

Example: `opts.ChecksAssumption.CheckNan = 'forbid'`

### **CheckSubnormal — Detect operations that result in subnormal floating point values**

`allow (default) | warn-first | warn-all | forbid`

*This property affects Code Prover analysis only.*

Detect operations that result in subnormal floating point values.

For more information, see Subnormal detection mode (-check-subnormal).

Example: `opts.ChecksAssumption.CheckSubnormal = 'forbid'`

### **DetectPointerEscape — Find cases where a function returns a pointer to one of its local variables**

`false (default) | true`

*This property affects Code Prover analysis only.*

Find cases where a function returns a pointer to one of its local variables, specified as true or false.

For more information, see Detect stack pointer dereference outside scope (-detect-pointer-escape).

Example: `opts.ChecksAssumption.DetectPointerEscape = true`

### **DisableInitializationChecks — Disable checks for noninitialized variables and pointers**

`false (default) | true`

*This property affects Code Prover analysis only.*

Disable checks for noninitialized variables and pointers, specified as true or false.

For more information, see Disable checks for non-initialization (-disable-initialization-checks).

Example: `opts.ChecksAssumption.DisableInitializationChecks = true`

**PermissiveFunctionPointer — Allow type mismatch between function pointers and the functions they point to**

false (default) | true

*This property affects Code Prover analysis only.*

Allow type mismatch between function pointers and the functions they point to, specified as true or false.

For more information, see `Permissive function pointer calls (-permissive-function-pointer)`.

Example: `opts.ChecksAssumption.PermissiveFunctionPointer = true`

**SignedIntegerOverflows — Behavior of signed integer overflows**

forbid (default) | allow | warn-with-wrap-around

*This property affects Code Prover analysis only.*

Enable the check for signed integer overflows and the assumptions to make following an overflow specified as `forbid`, `allow`, or `warn-with-wrap-around`.

For more information, see `Overflow mode for signed integer (-signed-integer-overflows)`.

Example: `opts.ChecksAssumption.SignedIntegerOverflows = 'warn-with-wrap-around'`

**SizeInBytes — Allow a pointer with insufficient memory buffer to point to a structure**

false (default) | true

*This property affects Code Prover analysis only.*

Allow a pointer with insufficient memory buffer to point to a structure, specified as true or false.

For more information, see `Allow incomplete or partial allocation of structures (-size-in-bytes)`.

Example: `opts.ChecksAssumption.SizeInBytes = true`

### **UncalledFunctionCheck — Detect functions that are not called directly or indirectly from main or another entry-point function**

`none (default) | never-called | called-from-unreachable | all`

*This property affects Code Prover analysis only.*

Detect functions that are not called directly or indirectly from main or another entry-point function, specified as `none`, `never-called`, `called-from-unreachable`, or `all`.

For more information, see `Detect uncalled functions (-uncalled-function-checks)`.

Example: `opts.ChecksAssumption.UncalledFunctionCheck = 'all'`

### **UnsignedIntegerOverflows — Behavior of unsigned integer overflows**

`allow (default) | forbid | warn-with-wrap-around`

*This property affects Code Prover analysis only.*

Enable the check for unsigned integer overflows and the assumptions to make following an overflow, specified as `forbid`, `allow`, or `warn-with-wrap-around`.

For more information, see `Overflow mode for unsigned integer (-unsigned-integer-overflows)`.

Example: `opts.ChecksAssumption.UnsignedIntegerOverflows = 'allow'`

### **CodeProverVerification (Affects Code Prover only)**

#### **ClassAnalyzer — Classes that you want to verify**

`all (default) | none | custom=class1[,class2,...]`

*This property affects Code Prover analysis only.*

Classes that you want to verify, specified as `all`, `none`, or `custom=class1[,class2,...]`.

For more information, see `Class (-class-analyzer)`.

Example: `opts.CodeProverVerification.ClassAnalyzer = 'custom=myClass1,myClass2'`

**ClassAnalyzerCalls — Class methods that you want to verify**

unused (default) | all | all-public | inherited-all | inherited-all-public |  
unused-public | inherited-unused | inherited-unused-public |  
custom=*method1*[,*method2*,...]

*This property affects Code Prover analysis only.*

Class methods that you want to verify, specified as one of the predefined sets or as  
custom=*method1*[,*method2*,...].

For more information, see Functions to call within the specified classes  
(-class-analyzer-calls).

Example: `opts.CodeProverVerification.ClassAnalyzerCalls = 'unused-public'`

**ClassOnly — Analyze only class methods**

false (default) | true

*This property affects Code Prover analysis only.*

Analyze only class methods, specified as true or false.

For more information, see Analyze class contents only (-class-only).

Example: `opts.CodeProverVerification.ClassOnly = true`

**EnableMain — Use main function provided in application**

false (default) | true

*This property affects Code Prover analysis only.*

Use `main` function provided in application, specified as true or false. If you set this property to false, the analysis generates a `main` function, if it is not present in the source files.

For more information, see Verify whole application.

Example: `opts.CodeProverVerification.EnableMain = true`

**FunctionsCalledBeforeMain — Functions that you want the generated main to call ahead of other functions**

cell array of function names

*This property affects Code Prover analysis only.*

Functions that you want the generated main to call ahead of other functions, specified as a cell array of function names.

For more information, see `Initialization functions (-functions-called-before-main)`.

```
Example: opts.CodeProverVerification.FunctionsCalledBeforeMain =  
{'func1', 'func2'}
```

### **Main — Use a Microsoft Visual C++ extensions of main**

`_tmain (default) | wmain | _tWinMain | wWinMain | WinMain | DLLMain`

*This property applies to a Code Prover analysis only .*

Use a Microsoft Visual C++ extension of main, specified as one of the predefined main extensions.

For more information, see `Main entry point (-main)`.

```
Example: opts.CodeProverVerification.Main = 'wmain'
```

### **MainGenerator — Generate a main function if it is not present in source files**

`true (default) | false`

*This property applies to a Code Prover analysis only .*

Generate a main function if it is not present in source files, specified as true or false.

For more information, see `Verify module or library (-main-generator)`.

```
Example: opts.CodeProverVerification.MainGenerator = false
```

### **MainGeneratorCalls — Functions that you want the generated main to call after the initialization functions**

`unused (default) | none | all | custom=function1[,function2[,...]]`

*This property applies to a Code Prover analysis only .*

Functions that you want the generated main to call after the initialization functions, specified as `unused`, `all`, `none`, or as a character array beginning with `custom=` followed by a list of comma-separated function names.

For more information, see `Functions to call` (`-main-generator-calls`).

Example: `opts.CodeProverVerification.MainGeneratorCalls = 'all'`

### **MainGeneratorWriteVariables – Global variables that you want the generated main to initialize**

`uninit` (C++ default) | `public` (C default) | `none` | `all` |  
`custom=variable1[,variable2[,...]]`

*This property applies to a Code Prover analysis only .*

Global variables that you want the generated main to initialize, specified as one of the predefined sets, or as a character array beginning with `custom=` followed by a list of comma-separated variable names.

For more information, see `Variables to initialize` (`-main-generator-writes-variables`).

Example: `opts.CodeProverVerification.MainGeneratorWriteVariables = 'all'`

### **NoConstructorsInitCheck – Do not check if class constructor initializes class members**

`false` (default) | `true`

*This property applies to a Code Prover analysis only .*

Do not check if class constructor initializes class members, specified as `true` or `false`.

For more information, see `Skip member initialization check` (`-no-constructors-init-check`).

Example: `opts.CodeProverVerification.NoConstructorsInitCheck = true`

### **UnitByUnit – Verify each source file independently of other source files**

`false` (default) | `true`

*This property affects Code Prover analysis only.*

Verify each source file independently of other source files, specified as `true` or `false`.

For more information, see `Verify files independently` (`-unit-by-unit`).

Example: `opts.CodeProverVerification.UnitByUnit = true`

### **UnitByUnitCommonSource — Files that you want to include with each source file during a file-by-file verification**

cell array of file paths

*This property affects Code Prover analysis only.*

Files that you want to include with each source file during a file-by-file verification, specified as a cell array of file paths.

For more information, see `Common source files (-unit-by-unit-common-source)`.

Example: `opts.CodeProverVerification.UnitByUnitCommonSource = {'/inc/file1.h', '/inc/file2.h'}`

### **CodingRulesCodeMetrics**

#### **AcAgcSubset — Subset of MISRA AC AGC rules to check**

OBL-rules (default) | OBL-REC-rules | single-unit-rules | system-decidable-rules | all-rules | SQ0-subset1 | SQ0-subset2 |  
`polyspace.CodingRulesOptions` object | file

Subset of MISRA AC AGC rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see `Check MISRA AC AGC (-misra-ac-agc)`.
- A MISRA AC AGC custom coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.
- Full path to a file containing your MISRA AC AGC subset. You can create this file manually or in the Polyspace interface. See “Check for Coding Rule Violations”.

To check MISRA AC AGC rules, also set `EnableAcAgc` to true.

Example: `opts.CodingRulesCodeMetrics.AcAgcSubset = 'all-rules'`

Data Types: char

#### **AllowedPragmas — Pragma directives for which MISRA C:2004 rule 3.4 or MISRA C++ 16-6-1 must not be applied**

cell array of character vectors

Pragma directives for which MISRA C:2004 rule 3.4 or MISRA C++ 16-6-1 must not be applied, specified as a cell array of character vectors. This property affects only MISRA C:2004 or MISRA AC AGC rule checking.

For more information, see `Allowed pragmas` (`-allowed-pragmas`).

```
Example: opts.CodingRulesCodeMetrics.AllowedPragmas =  
{'pragma_01', 'pragma_02'}
```

Data Types: `cell`

### **BooleanTypes — Data types the coding rule checker must treat as effectively Boolean**

cell array of character vectors

Data types that the coding rule checker must treat as effectively Boolean, specified as a cell array of character vectors.

For more information, see `Effective boolean types` (`-boolean-types`).

```
Example: opts.CodingRulesCodeMetrics.BooleanTypes =  
{'boolean1_t', 'boolean2_t'}
```

Data Types: `cell`

### **CodeMetrics — Activate code metric calculations**

`false` (default) | `true`

Activate code metric calculations, specified as `true` or `false`. If this property is turned off, Polyspace does not calculate code metrics even if you upload your results to Polyspace Metrics.

For more information about the code metrics, see `Calculate code metrics` (`-code-metrics`).

```
Example: opts.CodingRulesCodeMetrics.CodeMetrics = true
```

### **CustomRulesSubset — Custom naming conventions to check against**

custom coding rules file

Custom naming conventions to check against, specified as a custom coding rules file. You can create the custom coding rules file manually or in the Polyspace interface.

For more information, see `Check custom rules` (`-custom-rules`).

```
Example: opts.CodingRulesCodeMetrics.CustomRulesSubset = 'C:\ps_settings\coding_rules\custom_rules.txt'
```

Data Types: char

### **EnableAcAgc — Check MISRA AC AGC rules**

false (default) | true

Check MISRA AC AGC rules, specified as true or false. To customize which rules are checked, use `AcAgcSubset`.

For more information about the MISRA AC AGC checker, see `Check MISRA AC AGC (-misra-ac-agc)`.

```
Example: opts.CodingRulesCodeMetrics.EnableAcAgc = true;
```

### **EnableCustomRules — Check custom coding rules**

false (default) | true

Check custom coding rules, specified as true or false. Use with `CustomRulesSubset`.

For more information, see `Check custom rules (-custom-rules)`.

```
Example: opts.CodingRulesCodeMetrics.EnableCustomRules = true;
```

### **EnableJsf — Check JSF C++ rules**

false (default) | true

Check JSF C++ rules, specified as true or false. To customize which rules are checked, use `JsfSubset`.

For more information, see `Check JSF C++ rules (-jsf-coding-rules)`.

```
Example: opts.CodingRulesCodeMetrics.EnableJsf = true;
```

### **EnableMisraC — Check MISRA C:2004 rules**

false (default) | true

Check MISRA C:2004 rules, specified as true or false. To customize which rules are checked, use `MisraCSubset`.

For more information, see `Check MISRA C:2004 (-misra2)`.

```
Example: opts.CodingRulesCodeMetrics.EnableMisraC = true;
```

**EnableMisraC3 — Check MISRA C:2012 rules**

false (default) | true

Check MISRA C:2012 rules, specified as true or false. To customize which rules are checked, use `MisraC3Subset`.

For more information about the MISRA C:2012 checker, see `Check MISRA C:2012 (-misra3)`.

Example: `opts.CodingRulesCodeMetrics.EnableMisraC3 = true;`

**EnableMisraCpp — Check MISRA C++:2008 rules**

false (default) | true

Check MISRA C++:2008 rules, specified as true or false. To customize which rules are checked, use `MisraCppSubset`.

For more information about the MISRA C++:2008 checker, see `Check MISRA C++ rules (-misra-cpp)`.

Example: `opts.CodingRulesCodeMetrics.EnableMisraCpp = true;`

**JsfSubset — Subset of JSF C++ rules to check**shall-rules (default) | shall-will-rules | all-rules |  
`polyspace.CodingRulesOptions` object | file

Subset of JSF C++ rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see `Check JSF C++ rules (-jsf-coding-rules)`.
- A JSF C++ custom coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.
- Full path to a file containing your JSF C++ subset. You can create this file manually or from the Polyspace interface. See “Check for Coding Rule Violations”.

To check JSF C++ rules, set `EnableJsf` to true.

Example: `opts.CodingRulesCodeMetrics.JsfSubset = 'all-rules'`

Data Types: char

**Misra3AgcMode — Use the MISRA C:2012 categories for automatically generated code**

false (default) | true

Use the MISRA C:2012 categories for automatically generated code, specified as true or false.

For more information, see [Use generated code requirements \(-misra3-agc-mode\)](#).

Example: `opts.CodingRulesCodeMetrics.Misra3AgcMode = true;`

### **MisraC3Subset — Subset of MISRA C:2012 rules to check**

`mandatory-required` (default) | `mandatory` | `single-unit-rules` | `system-decidable-rules` | `CERT-rules` | `CERT-all` | `ISO-17961` | `all` | `SQ0-subset1` | `SQ0-subset2` | `polyspace.CodingRulesOptions` object | file

Subset of MISRA C:2012 rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see [Check MISRA C:2012 \(-misra3\)](#).
- A MISRA C:2012 custom coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.
- Full path to a file containing your MISRA C:2012 subset. You can create the custom coding rules file manually or in the Polyspace interface. See “[Check for Coding Rule Violations](#)”.

To check MISRA C:2012 rules, also set `EnableMisraC3` to true.

Example: `opts.CodingRulesCodeMetrics.MisraC3Subset = 'all'`

Data Types: char

### **MisraCSubset — Subset of MISRA C:2004 rules to check**

`required-rules` (default) | `all-rules` | `SQ0-subset1` | `SQ0-subset2` | `single-unit-rules` | `system-decidable-rules` | `polyspace.CodingRulesOptions` object | file

Subset of MISRA C:2004 rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see [Check MISRA C:2004 \(-misra2\)](#).
- A MISRA C:2004 custom coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.

- Full path to a file containing your MISRA C:2004 subset. You can create the custom coding rules file manually or in the Polyspace interface. See “Check for Coding Rule Violations”.

To check MISRA C:2004 rules, also set `EnableMisraC` to true.

Example: `opts.CodingRulesCodeMetrics.MisraCSubset = 'all-rules'`

Data Types: char

### **MisraCppSubset — Subset of MISRA C++ rules**

required-rules (default) | all-rules | CERT-rules | CERT-all | SQ0-subset1 | SQ0-subset2 | `polyspace.CodingRulesOptions` object | file

Subset of MISRA C++:2008 rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see `Check MISRA C++ rules (-misra-cpp)`.
- A MISRA C++ coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.
- Full path to a file containing your MISRA C++ subset. You can create this file manually or from the Polyspace interface. See “Check for Coding Rule Violations”.

To check MISRA C++ rules, set `EnableMisraCpp` to true.

Example: `opts.CodingRulesCodeMetrics.MisraCppSubset = 'all-rules'`

Data Types: char

### **EnvironmentSettings**

#### **Dos — Consider that file paths are in MS-DOS style**

true (default) | false

Consider that file paths are in MS-DOS style, specified as true or false.

For more information, see `Code from DOS or Windows file system (-dos)`.

Example: `opts.EnvironmentSettings.Dos = true;`

#### **IncludeFolders — Include folders needed for compilation**

cell array of include folder paths

Include folders needed for compilation, specified as a cell array of the include folder paths.

To specify all subfolders of a folder, use folder path followed by `**`, for instance, `'C:\includes\**'`. The notation follows the syntax of the `dir` function. See also “Specify Multiple Source Files”.

For more information, see `-I`.

```
Example: opts.EnvironmentSettings.IncludeFolders = {'/includes','/com1/inc'};
```

```
Example: opts.EnvironmentSettings.IncludeFolders = {'C:\project1\common\includes'};
```

Data Types: cell

### **Includes — Files to be #include-ed by each C file**

cell array of files

Files to be #include-ed by each C source file in the analysis, specified by a cell array of files.

For more information, see `Include (-include)`.

```
Example: opts.EnvironmentSettings.Includes = {'/inc/inc_file.h','/inc/inc_math.h'}
```

### **NoExternC — Ignore linking errors inside extern blocks**

false (default) | true

Ignore linking errors inside extern blocks, specified as true or false.

For more information, see `Ignore link errors (-no-extern-c)`.

```
Example: opts.EnvironmentSettings.NoExternC = false;
```

### **PostPreProcessingCommand — Command or script to run on source files after preprocessing**

character vector

Command or script to run on source files after preprocessing, specified as a character vector of the command to run.

For more information, see `Command/script to apply to preprocessed files (-post-preprocessing-command)`.

Example: Linux — `opts.EnvironmentSettings.PostPreProcessingCommand = [pwd, '/replace_keyword.pl']`

Example: Windows — `opts.EnvironmentSettings.PostPreProcessingCommand = ' "C:\Program Files\MATLAB\R2015b\sys\perl\win32\bin\perl.exe" "C:\My_Scripts\replace_keyword.pl" '`

### **StopWithCompileError — Stop analysis if a file does not compile**

`false` (default) | `true`

Stop analysis if a file does not compile, specified as `true` or `false`.

For more information, see `Stop analysis if a file does not compile (-stop-if-compile-error)`.

Example: `opts.EnvironmentSettings.StopWithCompileError = true;`

### **InputsStubbing**

#### **DataRangeSpecifications — Constrain global variables, function inputs, and return values of stubbed functions**

`file path`

Constrain global variables, function inputs, and return values of stubbed functions specified by the path to an XML constraint file. For more information about the constraint file, see “Specify External Constraints”.

For more information about this option, see `Constraint setup (-data-range-specifications)`.

Example: `opts.InputsStubbing.DataRangeSpecifications = 'C:\project\constraint_file.xml'`

#### **DoNotGenerateResultsFor — Files on which you do not want analysis results**

`include-folders` (default) | `all-headers` | `custom=file1[, folder1[, ...]]`

Files on which you do not want analysis results, specified by `include-folders`, `all-headers`, or a character array beginning with `custom=` and containing a list of comma-separated file or folder names.

Use this option with `InputsStubbing.GenerateResultsFor`. For more information, see `Do not generate results for (-do-not-generate-results-for)`.

Example: `opts.InputsStubbing.DoNotGenerateResultsFor = 'custom=C:\project\file1.c,C:\project\file2.c'`

### **GenerateResultsFor — Files on which you want analysis results**

source-headers (default) | all-headers | custom=*file1[, folder1[, ...]]*

Files on which you want analysis results, specified by `source-headers`, `all-headers`, or a character array beginning with `custom=` and containing a comma-separated file or folder names.

Use this option with `InputsStubbing.DoNotGenerateResultsFor`. For more information, see `Generate results for sources` and `(-generate-results-for)`.

```
Example: opts.InputsStubbing.GenerateResultsFor = 'custom=C:\project\includes_common_1,C:\project\includes_common_2'
```

### **FunctionsToStub — Functions to stub during analysis**

cell array of function names

*This property affects Code Prover analysis only.*

Functions to stub during analysis, specified as a cell array of function names.

For more information, see .

```
Example: opts.InputsStubbing.FunctionsToStub = {'func1', 'func2'}
```

### **NoDefInitGlob — Consider global variables as uninitialized**

false (default) | true

*This property affects Code Prover analysis only.*

Consider global variables as uninitialized, specified as true or false.

For more information, see .

```
Example: opts.InputsStubbing.NoDefInitGlob = true
```

### **NoStlStubs — Do not use Polyspace implementations of functions in the Standard Template Library**

false (default) | true

*This property applies only to a Code Prover analysis of C++ code.*

Do not use Polyspace implementations of functions in the Standard Template Library, specified as true or false.

For more information, see .

Example: `opts.InputsStubbing.NoStlStubs = true`

### **StubECoderLookupTables — Specify that the analysis must stub functions in the generated code that use lookup tables**

true (default) | false

*This property applies only to a Code Prover analysis of code generated from models.*

Specify that the analysis must stub functions in the generated code that use lookup tables. By replacing the functions with stubs, the analysis assumes more precise return values for the functions.

For more information, see `Generate stubs for Embedded Coder lookup tables (-stub-embedded-coder-lookup-table-functions)`.

Example: `opts.InputsStubbing.StubECoderLookupTables = true`

## **Macros**

### **DefinedMacros — Macros to be replaced**

cell array of macros

In preprocessed code, macros are replaced by the definition, specified in a cell array of macros and definitions. Specify the macro as `Macro=Value`. If you want Polyspace to ignore the macro, leave the `Value` blank. A macro with no equal sign replaces all instances of that macro by 1.

For more information, see `Preprocessor definitions (-D)`.

Example: `opts.Macros.DefinedMacros = {'uint32=int','name3=','var'}`

### **UndefinedMacros — Macros to undefine**

cell array of macros

In preprocessed code, macros are undefined, specified by a cell array of macros to undefine.

For more information, see `Disabled preprocessor definitions (-U)`.

Example: `opts.Macros.DefinedMacros = {'name1','name2'}`

### **MergedComputingSettings**

#### **AddToResultsRepositoryBugFinder — Upload Bug Finder results to Polyspace Metrics web dashboard**

false (default) | true

*This property affects Bug Finder analysis only.*

Upload Bug Finder analysis results to Polyspace Metrics web dashboard, specified as true or false. To use this option, in your Polyspace preferences, you must specify a metrics server.

For more information, see Upload results to Polyspace Metrics (-add-to-results-repository).

Example: `opts.MergedComputingSettings.AddToResultsRepositoryBugFinder = true;`

#### **AddToResultsRepositoryCodeProver — Upload Code Prover results to Polyspace Metrics web dashboard**

false (default) | true

*This property affects Code Prover analysis only.*

Upload Code Prover analysis results to Polyspace Metrics web dashboard, specified as true or false. To use this option, in your Polyspace preferences, you must specify a metrics server.

For more information, see Upload results to Polyspace Metrics (-add-to-results-repository).

Example: `opts.MergedComputingSettings.AddToResultsRepositoryCodeProver = true;`

#### **BatchBugFinder — Send Bug Finder analysis to remote server**

false (default) | true

*This property affects Bug Finder analysis only.*

Send Bug Finder analysis to remote server, specified as true or false. To use this option, in your Polyspace preferences, you must specify a metrics server.

For more information, see Run Bug Finder or Code Prover analysis on a remote cluster (-batch).

Example: `opts.MergedComputingSettings.BatchBugFinder = true;`

### **BatchCodeProver — Send Code Prover analysis to remote server**

false (default) | true

*This property affects Code Prover analysis only.*

Send Code Prover analysis to remote server, specified as true or false. To use this option, in your Polyspace preferences, you must specify a metrics server.

For more information, see `Run Bug Finder` or `Code Prover analysis on a remote cluster (-batch)`.

Example: `opts.MergedComputingSettings.BatchCodeProver = true;`

### **FastAnalysis — Run Bug Finder analysis using faster local mode**

false (default) | true

*This property affects Bug Finder analysis only.*

Use fast analysis mode for Bug Finder analysis, specified as true or false.

For more information, see `Use fast analysis mode for Bug Finder (-fast-analysis)`.

Example: `opts.MergedComputingSettings.FastAnalysis = true;`

## **MergedReporting**

### **EnableReportGeneration — Generate a report after the analysis**

false (default) | true

After the analysis, generate a report, specified as true or false.

For more information, see `Generate report`.

Example: `opts.MergedReporting.EnableReportGeneration = true`

### **ReportOutputFormat — Output format of generated report**

Word (default) | HTML | PDF

Output format of generated report, specified as one of the report formats. To activate this option, specify `Reporting.EnableReportGeneration`.

For more information about the different values, see `Output format (-report-output-format)`.

Example: `opts.MergedReporting.ReportOutputFormat = 'PDF'`

### **BugFinderReportTemplate — Template for generating Bug Finder analysis report**

BugFinderSummary (default) | BugFinder | SecurityCERT | SecurityCWE | SecurityISO\_17961 | CodeMetrics | CodingRules

*This property affects a Bug Finder analysis only.*

Template for generating analysis report, specified as one of the report formats. To activate this option, specify `Reporting.EnableReportGeneration`.

For more information about the different values, see `Bug Finder and Code Prover report (-report-template)`.

Example: `opts.MergedReporting.BugFinderReportTemplate = 'CodeMetrics'`

### **CodeProverReportTemplate — Template for generating Code Prover analysis report**

Developer (default) | CallHierarchy | CodeMetrics | CodingRules | DeveloperReview | Developer\_withGreenChecks | Quality | VariableAccess

*This property affects a Code Prover analysis only.*

Template for generating analysis report, specified as one of the predefined report formats. To activate this option, specify `Reporting.EnableReportGeneration`.

For more information about the different values, see `Bug Finder and Code Prover report (-report-template)`.

Example: `opts.MergedReporting.CodeProverReportTemplate = 'CodeMetrics'`

### **Multitasking**

#### **ArxmlMultitasking — Specify path of ARXML files to parse for multitasking configuration**

cell array of file paths

Specify the path to the ARXML files the software parses to set up your multitasking configuration.

To activate this option, specify `Multitasking.EnableExternalMultitasking` and set `Multitasking.ExternalMultitaskingType` to `autosar`.

For more information, see `ARXML files selection (-autosar-multitasking)`

```
Example: opts.Multitasking.ArxmlMultitasking={'C:\Polyspace_Workspace
\AUTOSAR\myFile.arxml'}
```

### **CriticalSectionBegin — Functions that begin critical sections**

cell array of critical section function names

Functions that begin critical sections specified as a cell array of critical section function names. To activate this option, specify `Multitasking.EnableMultitasking` and `Multitasking.CriticalSectionEnd`.

For more information, see `Critical section details (-critical-section-begin -critical-section-end)`.

```
Example: opts.Multitasking.CriticalSectionBegin =
{'function1:cs1', 'function2:cs2'}
```

### **CriticalSectionEnd — Functions that end critical sections**

cell array of critical section function names

Functions that end critical sections specified as a cell array of critical section function names. To activate this option, specify `Multitasking.EnableMultitasking` and `Multitasking.CriticalSectionBegin`.

For more information, see `Critical section details (-critical-section-begin -critical-section-end)`.

```
Example: opts.Multitasking.CriticalSectionEnd =
{'function1:cs1', 'function2:cs2'}
```

### **CyclicTasks — Specify functions that represent cyclic tasks**

cell array of function names

Specify functions that represent cyclic tasks.

To activate this option, also specify `Multitasking.EnableMultitasking`.

For more information, see `Cyclic tasks (-cyclic-tasks)`.

```
Example: opts.Multitasking.CyclicTasks = {'function1', 'function2'}
```

### **EnableConcurrencyDetection — Enable automatic detection of certain families of threading functions**

false (default) | true

*This property affects Code Prover analysis only.*

Enable automatic detection of certain families of threading functions, specified as true or false.

For more information, see `Enable automatic concurrency detection for Code Prover (-enable-concurrency-detection)`.

Example: `opts.Multitasking.EnableConcurrencyDetection = true`

### **EnableExternalMultitasking — Enable automatic multitasking configuration from external file definitions**

false (default) | true

Enable multitasking configuration of your projects from external files you provide. Configure multitasking from ARXML files for an AUTOSAR project, or from OIL files for an OSEK project.

Activate this option to enable `Multitasking.ArxmlMultitasking` or `Multitasking.OsekMultitasking`.

For more information, see `OIL files selection (-osek-multitasking)` and `ARXML files selection (-autosar-multitasking)`.

Example: `opts.Multitasking.EnableExternalMultitasking = 1`

### **EnableMultitasking — Configure multitasking manually**

false (default) | true

Configure multitasking manually by specifying true. This property activates the other manual, multitasking properties.

For more information, see `Configure multitasking manually`.

Example: `opts.Multitasking.EnableMultitasking = 1`

### **EntryPoints — Functions that serve as entry-points to your multitasking application**

cell array of entry-point function names

Functions that serve as entry-points to your multitasking application specified as a cell array of entry-point function names. To activate this option, also specify `Multitasking.EnableMultitasking`.

For more information, see `Tasks (-entry-points)`.

Example: `opts.Multitasking.EntryPoints = {'function1','function2'}`

### **ExternalMultitaskingType — Specify type of file to parse for multitasking configuration**

`osek` (default) | `autosar`

Specify the type of file the software parses to set up your multitasking configuration:

- For `osek` type, the analysis looks for OIL files in the file or folder paths that you specify.
- For `autosar` type, the analysis looks for ARXML files in the file paths that you specify.

To activate this option, specify `Multitasking.EnableExternalMultitasking`.

For more information, see `OIL files selection (-osek-multitasking)` and `ARXML files selection (-autosar-multitasking)`.

Example: `opts.Multitasking.ExternalMultitaskingType = 'autosar'`

### **Interrupts — Specify functions that represent nonpreemptable interrupts**

cell array of function names

Specify functions that represent nonpreemptable interrupts.

To activate this option, specify `Multitasking.EnableMultitasking`.

For more information, see `Interrupts (-interrupts)`.

Example: `opts.Multitasking.Interrupts = {'function1','function2'}`

### **InterruptsDisableAll — Specify routine that disable interrupts**

cell array with one function name

*This property affects Bug Finder analysis only.*

Specify function that disables all interrupts.

To activate this option, specify `Multitasking.EnableMultitasking`.

For more information, see `Disabling all interrupts (-routine-disable-interrupts -routine-enable-interrupts)`.

Example: `opts.Multitasking.InterruptsDisableAll = {'function'}`

### **InterruptsEnableAll — Specify routine that reenables interrupts**

cell array with one function name

*This property affects Bug Finder analysis only.*

Specify function that reenables all interrupts.

To activate this option, specify `Multitasking.EnableMultitasking`.

For more information, see `Disabling all interrupts (-routine-disable-interrupts -routine-enable-interrupts)`.

Example: `opts.Multitasking.InterruptsEnableAll = {'function'}`

### **OsekMultitasking — Specify path of OIL files to parse for multitasking configuration**

`auto (default) | custom=file1[, folder1[, ...]]`

Specify the path to the OIL files the software parses to set up your multitasking configuration:

- In `auto` mode, the analysis uses OIL files in your project source and include folders, but not their subfolders.
- In `custom` mode, the analysis uses the OIL files at the specified path, and the path subfolders.

To activate this option, specify `Multitasking.EnableExternalMultitasking` and set `Multitasking.ExternalMultitaskingType` to `osek`.

For more information, see `OIL files selection (-osek-multitasking)`

Example: `opts.Multitasking.OsekMultitasking = 'custom=file_path, dir_path'`

### **TemporalExclusion — Entry-point functions that cannot execute concurrently**

cell array of entry-point function names

Entry-point functions that cannot execute concurrently specified as a cell array of entry-point function names. Each set of exclusive tasks is one cell array entry with functions

separated by spaces. To activate this option, specify `Multitasking.EnableMultitasking`.

For more information, see `Temporally exclusive tasks (-temporal-exclusions-file)`.

Example: `opts.Multitasking.TemporalExclusion = {'function1 function2', 'function3 function4 function5'}` where `function1` and `function2` are temporally exclusive, and `function3`, `function4`, and `function 5` are temporally exclusive.

### **Precision (Affects Code Prover Only)**

#### **ContextSensitivity — Store call context information to identify function call that caused errors**

`none` (default) | `auto` | `custom=function1[,function2[,...]]`

*This property affects Code Prover analysis only.*

Store call context information to identify a function call that caused errors, specified as `none`, `auto`, or as a character array beginning with `custom=` followed by a list of comma-separated function names.

For more information, see `Sensitivity context (-context-sensitivity)`.

Example: `opts.Precision.ContextSensitivity = 'auto'`

Example: `opts.Precision.ContextSensitivity = 'custom=func1'`

#### **ModulesPrecision — Source files you want to verify at higher precision**

cell array of file names and precision levels

*This property affects Code Prover analysis only.*

Source files that you want to verify at higher precision, specified as a cell array of file names without the extension and precision levels using this syntax: `filename:0level`

For more information, see `Specific precision (-modules-precision)`.

Example: `opts.Precision.ModulesPrecision = {'file1:00', 'file2:03'}`

#### **0Level — Precision level for the verification**

`2` (default) | `0` | `1` | `3`

*This property affects Code Prover analysis only.*

Precision level for the verification, specified as 0, 1, 2, or 3.

For more information, see `Precision level (-0)`.

Example: `opts.Precision.0Level = 3`

### **PathSensitivityDelta — Avoid certain verification approximations for code with fewer lines**

positive integer

*This property affects Code Prover analysis only.*

Avoid certain verification approximations for code with fewer lines, specified as a positive integer representing how sensitive the analysis is. Higher values can increase verification time exponentially.

For more information, see `Improve precision of interprocedural analysis (-path-sensitivity-delta)`.

Example: `opts.Precision.PathSensitivityDelta = 2`

### **Timeout — Time limit on your verification**

character vector

*This property affects Code Prover analysis only.*

Time limit on your verification, specified as a character vector of time in hours.

For more information, see `Verification time limit (-timeout)`.

Example: `opts.Precision.Timeout = '5.75'`

### **To — Number of times the verification process runs**

Software Safety Analysis level 2 (default) | Software Safety Analysis level 0 | Software Safety Analysis level 1 | Software Safety Analysis level 3 | Software Safety Analysis level 4 | Source Compliance Checking | other

*This property affects Code Prover analysis only.*

Number of times the verification process runs, specified as one of the preset analysis levels.

For more information, see `Verification level (-to)`.

Example: `opts.Precision.To = 'Software Safety Analysis level 3'`

### **Scaling (Affects Code Prover Only)**

#### **Inline — Functions on which separate results must be generated for each function call**

cell array of function names

*This property affects Code Prover analysis only.*

Functions on which separate results must be generated for each function call, specified as a cell array of function names.

For more information, see `Inline (-inline)`.

Example: `opts.Scaling.Inline = {'func1','func2'}`

#### **KLimiting — Limit depth of analysis for nested structures**

positive integer

*This property affects Code Prover analysis only.*

Limit depth of analysis for nested structures, specified as a positive integer indicating how many levels into a nested structure to verify.

For more information, see `Depth of verification inside structures (-k-limiting)`.

Example: `opts.Scaling.KLimiting = 3`

### **TargetCompiler**

#### **Compiler — Compiler that builds your source code**

generic (default) | gnu3.4 | gnu4.6 | gnu4.7 | gnu4.8 | gnu4.9 | gnu5.x | gnu6.x | clang3.x | visual9.0 | visual10 | visual11.0 | visual12.0 | visual14.0 | keil | iar | codewarrior | diab | greenhills | iar-ew | renesas | tasking | ti

Compiler that builds your source code.

For more information, see `Compiler (-compiler)`.

Example: `opts.TargetCompiler.Compiler = 'Visual11.0'`

#### **CppVersion — Specify C++11 standard version followed in code**

defined-by-compiler (default) | cpp03 | cpp11 | cpp14

Specify C++ standard version followed in code, specified as a character vector.

For more information, see `C++ standard version (-cpp-version)`.

Example: `opts.TargetCompiler.CppVersion = 'cpp11';`

### **CVersion — Specify C standard version followed in code**

`defined-by-compiler (default) | c90 | c99 | c11`

Specify C standard version followed in code, specified as a character vector.

For more information, see `C standard version (-c-version)`.

Example: `opts.TargetCompiler.CVersion = 'c90';`

### **DivRoundDown — Round down quotients from division or modulus of negative numbers**

`false (default) | true`

Round down quotients from division or modulus of negative numbers, specified as true or false.

For more information, see `Division round down (-div-round-down)`.

Example: `opts.TargetCompiler.DivRoundDown = true`

### **EnumTypeDefinition — Base type representation of enum**

`defined-by-compiler (default) | auto-signed-first | auto-unsigned-first`

Base type representation of enum, specified by an allowed base-type set. For more information about the different values, see `Enum type definition (-enum-type-definition)`.

Example: `opts.TargetCompiler.EnumTypeDefinition = 'auto-unsigned-first'`

### **IgnorePragmaPack — Ignore #pragma pack directives**

`false (default) | true`

Ignore `#pragma pack` directives, specified as true or false.

For more information, see `Ignore pragma pack directives (-ignore-pragma-pack)`.

Example: `opts.TargetCompiler.IgnorePragmaPack = true`

**Language — Language of analysis**

C-CPP (default) | C | CPP

This property is read-only.

Language of the analysis, specified during the object construction. This value changes which properties appear.

For more information, see `Source code language (-lang)`.

**LogicalSignedRightShift — Treatment of signed bit on signed variables**

Arithmetical (default) | Logical

Treatment of signed bit on signed variables, specified as `Arithmetical` or `Logical`. For more information, see `Signed right shift (-logical-signed-right-shift)`.

Example: `opts.TargetCompiler.LogicalSignedRightShift = 'Logical'`

**NoUliterals — Do not use predefined typedefs for char16\_t or char32\_t**

false (default) | true

Do not use predefined typedefs for `char16_t` or `char32_t`, specified as `true` or `false`. For more information, see `Block char16/32_t types (-no-uliterals)`.

Example: `opts.TargetCompiler.NoUliterals = true`

**PackAlignmentValue — Default structure packing alignment**

defined-by-compiler (default) | 1 | 2 | 4 | 8 | 16

Default structure packing alignment, specified as `defined-by-compiler`, `1`, `2`, `4`, `8`, or `16`. This property is available only for Visual C++ code.

For more information, see `Pack alignment value (-pack-alignment-value)`.

Example: `opts.TargetCompiler.PackAlignmentValue = '4'`

**SfrTypes — sfr types**

cell array of sfr keywords

`sfr` types, specified as a cell array of `sfr` keywords using the syntax `sfr_name=size_in_bits`. For more information, see `Sfr type support (-sfr-types)`.

This option only applies when you set `TargetCompiler.Compiler` to `keil` or `iar`.

Example: `opts.TargetCompiler.SfrTypes = {'sfr32=32'}`

### **SizeTTypeIs — Underlying type of size\_t**

`defined-by-compiler (default) | unsigned-int | unsigned-long | unsigned-long-long`

Underlying type of `size_t`, specified as `defined-by-compiler`, `unsigned-int`, `unsigned-long`, or `unsigned-long-long`. See `Management of size_t (-size-t-type-is)`.

Example: `opts.TargetCompiler.SizeTTypeIs = 'unsigned-long'`

### **Target — Target processor**

`i386 (default) | arm | arm64 | avr | c-167 | c166 | c18 | c28x | c6000 | coldfire | hc08 | hc12 | m68k | mcore | mips | mpc5xx | msp430 | necv850 | powerpc | powerpc64 | rh850 | rl78 | rx | s12z | sharc21x61 | sparc | superh | tms320c3x | tricore | x86_64 | generic target object`

Set size of data types and endianness of processor, specified as one of the predefined target processors or a generic target object.

For more information about the predefined processors, see `Target processor type (-target)`.

For more information about creating a generic target, see `polyspace.GenericTargetOptions`.

Example: `opts.TargetCompiler.Target = 'hc12'`

### **WcharTTypeIs — Underlying type of wchar\_t**

`defined-by-compiler (default) | signed-short | unsigned-short | signed-int | unsigned-int | signed-long | unsigned-long`

Underlying type of `wchar_t`, specified as `defined-by-compiler`, `signed-short`, `unsigned-short`, `signed-int`, `unsigned-int`, `signed-long`, or `unsigned-long`. See `Management of wchar_t (-wchar-t-type-is)`.

Example: `opts.TargetCompiler.WcharTTypeIs = 'unsigned-int'`

### **VerificationAssumption (Affects Code Prover Only)**

#### **ConsiderVolatileQualifierOnFields — Assume that volatile qualified structure fields can have all possible values at any point in code**

`false (default) | true`

*This property affects Code Prover analysis only.*

Assume that volatile qualified structure fields can have all possible values at any point in code.

For more information, see Consider volatile qualifier on fields (-consider-volatile-qualifier-on-fields).

Example: `opts.VerificationAssumption.ConsiderVolatileQualifierOnFields = true`

### **ConstraintPointersMayBeNull — Specify that environment pointers can be NULL unless constrained otherwise**

false (default) | true

*This property affects Code Prover analysis only.*

Specify that environment pointers can be NULL unless constrained otherwise.

For more information, see Consider environment pointers as unsafe (-stubbed-pointers-are-unsafe).

Example: `opts.VerificationAssumption.ConstraintPointersMayBeNull = true`

### **FloatRoundingMode — Rounding modes to consider when determining the results of floating-point arithmetic**

to-nearest (default) | all

*This property affects Code Prover analysis only.*

Rounding modes to consider when determining the results of floating-point arithmetic, specified as to-nearest or all.

For more information, see Float rounding mode (-float-rounding-mode).

Example: `opts.VerificationAssumption.FloatRoundingMode = 'all'`

### **RespectTypesInFields — Do not cast nonpointer fields of a structure to pointers**

false (default) | true

*This property affects Code Prover analysis only.*

Do not cast nonpointer fields of a structure to pointers, specified as true or false.

For more information, see `Respect types in fields (-respect-types-in-fields)`.

Example: `opts.VerificationAssumption.RespectTypesInFields = true`

### **RespectTypesInGlobals — Do not cast nonpointer global variables to pointers**

false (default) | true

*This property affects Code Prover analysis only.*

Do not cast nonpointer global variables to pointers, specified as true or false.

For more information, see `Respect types in global variables (-respect-types-in-globals)`.

Example: `opts.VerificationAssumption.RespectTypesInGlobals = true`

### **Other Properties**

#### **Author — Project author**

username of current user (default) | character vector

Name of project author, specified as a character vector.

For more information, see `-author`.

Example: `opts.Author = 'JaneDoe'`

#### **ImportComments — Import comments and justifications from previous analysis**

character vector

To import comments and justifications from a previous analysis, specify the path to the results folder of the previous analysis.

For more information, see `-import-comments`

Example: `opts.ImportComments = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', 'Module_1', 'BF_Result')`

#### **Prog — Project name**

PolyspaceProject (default) | character vector

Project name, specified as a character vector.

For more information, see `-prog`.

Example: `opts.Prog = 'myProject'`

### **ResultsDir — Location to store results**

folder path

Location to store results, specified as a folder path. By default, the results are stored in the current folder.

For more information, see `-results-dir`.

Example: `opts.ResultsDir = 'C:\project\myproject\results\'`

### **Sources — Source files**

cell array of files

Source files to analyze, specified as a cell array of files.

To specify all files in a folder, use folder path followed by `*`, for instance, `'C:\src\*'`. To specify all files in a folder and its subfolders, use folder path followed by `**`, for instance, `'C:\src\**'`. The notation follows the syntax of the `dir` function. See also “Specify Multiple Source Files”.

For more information, see `-sources`.

Example: `opts.Sources = {'file1.c', 'file2.c', 'file3.c'}`

Example: `opts.Sources = {'project/src1/file1.c', 'project/src2/file2.c', 'project/src3/file3.c'}`

### **Version — Project version number**

1.0 (default) | character array of a number

Version number of project, specified as a character array of a number. This option is useful if you upload your results to Polyspace Metrics. If you increment version numbers each time that you reanalyze your object, you can compare the results from two versions in Polyspace Metrics.

For more information, see `-v[ersion]`.

Example: `opts.Version = '2.3'`

## **See Also**

### **Topics**

“Analysis Options”

**Introduced in R2017a**

# polyspace.ModelLinkOptions Properties

Customize Polyspace analysis of generated code with options object properties

## Description

To customize your Polyspace analysis of generated code, modify the `polyspace.ModelLinkOptions` object properties. Each property corresponds to an analysis option on the **Configuration** pane in the Polyspace user interface.

The properties are grouped using the same categories as the **Configuration** pane. This page only shows what values each property can take. For details about:

- The different options, see the analysis options reference pages.
- How to create and use the object, see `polyspace.ModelLinkOptions`.

The same properties are also available with the deprecated classes `polyspace.ModelLinkBugFinderOptions` and `polyspace.ModelLinkCodeProverOptions`.

Each property description below also highlights if the option affects only one of Bug Finder or Code Prover.

---

**Note** Some options might not be available depending on the language setting of the object. You can set the source code language (Language) to 'C', 'CPP' or 'C-CPP' during object creation, but cannot change it later.

---

## Properties

### Advanced

#### **Additional** — Additional flags for analysis

character vector

Additional flags for analysis specified as a character vector.

For more information, see `Other`.

Example: `opts.Advanced.Additional = '-extra-flags -option -extra-flags value'`

### **PostAnalysisCommand — Command or script software should execute after analysis finishes**

character vector

Command or script software should execute after analysis finishes, specified as a character vector.

For more information, see `Command/script to apply after the end of the code verification (-post-analysis-command)`.

Example: `opts.Advanced.PostAnalysisCommand = '"C:\Program Files\perl\win32\bin\perl.exe" "C:\My_Scripts\send_email"'`

### **AutomaticOrangeTester — Run the Automatic Orange Tester**

false (default) | true

*This property affects Code Prover analysis only.*

Run the Automatic Orange Tester after verification, specified as true or false.

For more information, see `Automatic Orange Tester (-automatic-orange-tester)`.

Example: `opts.Advanced.AutomaticOrangeTester = true`

### **AutomaticOrangeTesterLoopMaxIteration — Number of loop iterations after which Automatic Orange Tester considers infinite loop**

1000 (default) | positive integer

*This property affects Code Prover analysis only.*

Number of loop iterations after which Automatic Orange Tester considers the test an infinite loop, specified as a positive integer, maximum of 1000.

For more information, see `Maximum loop iterations (-automatic-orange-tester-loop-max-iteration)`.

Example: `opts.Advanced.AutomaticOrangeTesterLoopMaxIteration = 500`

**AutomaticOrangeTesterTestsNumber — Number of tests that Automatic Orange Tester must run**

500 (default) | positive integer

*This property affects Code Prover analysis only.*

Number of tests that Automatic Orange Tester must run, specified as a positive integer, maximum of 100,000.

For more information, see `Number of automatic tests (-automatic-orange-tester-tests-number)`.

Example: `opts.Advanced.AutomaticOrangeTesterTestsNumber = 1000`

**AutomaticOrangeTesterTimeout — Time in seconds allowed for a single test in Automatic Orange Tester**

5 (default) | positive integer

*This property affects Code Prover analysis only.*

Time in seconds allowed for a single test in Automatic Orange Tester, specified as a positive integer, maximum of 60.

For more information, see `Maximum test time (-automatic-orange-tester-timeout)`.

Example: `opts.Advanced.AutomaticOrangeTesterTimeout = 10`

**BugFinderAnalysis (Affects Bug Finder Only)****CheckersList — List of custom checkers to activate**

polyspace.DefectsOptions object | cell array of defect acronyms

*This property affects Bug Finder analysis only.*

List of custom checkers to activate specified by using the name of a `polyspace.DefectsOptions` object or a cell array of defect acronyms. To use this custom list in your analysis, set `CheckersPreset` to `custom`.

For more information, see `polyspace.DefectsOptions`.

Example: `defects = polyspace.DefectsOptions;`  
`opts.BugFinderAnalysis.CheckersList = defects`

```
Example: opts.BugFinderAnalysis.CheckersList =  
{'INT_ZERO_DIV', 'FLOAT_ZERO_DIV'}
```

### **CheckersPreset — Subset of Bug Finder defects**

default (default) | all | CERT-rules | CERT-all | ISO-17961 | CWE | custom

*This property affects Bug Finder analysis only.*

Preset checker list, specified as a character vector of one of the preset options: `default`, `all`, or `custom`. To use `custom`, specify a `BugFinderAnalysis.CheckersList`.

For more information, see `Find defects (-checkers)`.

```
Example: opts.BugFinderAnalysis.CheckersPreset = 'all'
```

### **EnableCheckers — Activate defect checking**

true (default) | false

*This property affects Bug Finder analysis only.*

Activate defect checking, specified as `true` or `false`. Setting this property to `false` disables all defects. If you want to disable defect checking but still get results, turn on coding rules checking or code metric checking.

This property is equivalent to the **Find defects** check box in the Polyspace interface.

```
Example: opts.BugFinderAnalysis.EnableCheckers = false
```

### **ChecksAssumption (Affects Code Prover Only)**

#### **AllowNegativeOperandInShift — Allow left shift operations on a negative number**

true (default) | false

*This property affects Code Prover analysis only.*

Allow left shift operations on a negative number, specified as `true` or `false`.

For more information, see `Allow negative operand for left shifts (-allow-negative-operand-in-shift)`.

```
Example: opts.ChecksAssumption.AllowNegativeOperandInShift = true
```

#### **AllowNonFiniteFloats — Incorporate infinities and/or NaNs**

false (default) | true

*This property affects Code Prover analysis only.*

Incorporate infinities and/or NaNs, specified as true or false.

For more information, see `Consider non finite floats (-allow-non-finite-floats)`.

Example: `opts.ChecksAssumption.AllowNonFiniteFloats = true`

**AllowPtrArithOnStruct — Allow arithmetic on pointer to a structure field so that it points to another field**

false (default) | true

*This property affects Code Prover analysis only.*

Allow arithmetic on pointer to a structure field so that it points to another field, specified as true or false.

For more information, see `Enable pointer arithmetic across fields (-allow-ptr-arith-on-struct)`.

Example: `opts.ChecksAssumption.AllowPtrArithOnStruct = true`

**CheckInfinite — Detect floating-point operations that result in infinities**

allow (default) | warn-first | forbid

*This property affects Code Prover analysis only.*

Detect floating-point operations that result in infinities.

To activate this option, specify `ChecksAssumption.AllowNonFiniteFloats`.

For more information, see `Infinities (-check-infinite)`.

Example: `opts.ChecksAssumption.CheckInfinite = 'forbid'`

**CheckNan — Detect floating-point operations that result in NaN-s**

allow (default) | warn-first | forbid

*This property affects Code Prover analysis only.*

Detect floating-point operations that result in NaN-s.

To activate this option, specify `ChecksAssumption.AllowNonFiniteFloats`.

For more information, see NaNs (-check-nan).

Example: `opts.ChecksAssumption.CheckNan = 'forbid'`

### **CheckSubnormal — Detect operations that result in subnormal floating point values**

`allow (default) | warn-first | warn-all | forbid`

*This property affects Code Prover analysis only.*

Detect operations that result in subnormal floating point values.

For more information, see Subnormal detection mode (-check-subnormal).

Example: `opts.ChecksAssumption.CheckSubnormal = 'forbid'`

### **DetectPointerEscape — Find cases where a function returns a pointer to one of its local variables**

`false (default) | true`

*This property affects Code Prover analysis only.*

Find cases where a function returns a pointer to one of its local variables, specified as true or false.

For more information, see Detect stack pointer dereference outside scope (-detect-pointer-escape).

Example: `opts.ChecksAssumption.DetectPointerEscape = true`

### **DisableInitializationChecks — Disable checks for noninitialized variables and pointers**

`false (default) | true`

*This property affects Code Prover analysis only.*

Disable checks for noninitialized variables and pointers, specified as true or false.

For more information, see Disable checks for non-initialization (-disable-initialization-checks).

Example: `opts.ChecksAssumption.DisableInitializationChecks = true`

**PermissiveFunctionPointer — Allow type mismatch between function pointers and the functions they point to**

false (default) | true

*This property affects Code Prover analysis only.*

Allow type mismatch between function pointers and the functions they point to, specified as true or false.

For more information, see `Permissive function pointer calls (-permissive-function-pointer)`.

Example: `opts.ChecksAssumption.PermissiveFunctionPointer = true`

**SignedIntegerOverflows — Behavior of signed integer overflows**

warn-with-wrap-around (default) | forbid | allow

*This property affects Code Prover analysis only.*

Enable the check for signed integer overflows and the assumptions to make following an overflow specified as `forbid`, `allow`, or `warn-with-wrap-around`.

For more information, see `Overflow mode for signed integer (-signed-integer-overflows)`.

Example: `opts.ChecksAssumption.SignedIntegerOverflows = 'warn-with-wrap-around'`

**SizeInBytes — Allow a pointer with insufficient memory buffer to point to a structure**

false (default) | true

*This property affects Code Prover analysis only.*

Allow a pointer with insufficient memory buffer to point to a structure, specified as true or false.

For more information, see `Allow incomplete or partial allocation of structures (-size-in-bytes)`.

Example: `opts.ChecksAssumption.SizeInBytes = true`

### **UncalledFunctionCheck — Detect functions that are not called directly or indirectly from main or another entry-point function**

none (default) | never-called | called-from-unreachable | all

*This property affects Code Prover analysis only.*

Detect functions that are not called directly or indirectly from main or another entry-point function, specified as none, never-called, called-from-unreachable, or all.

For more information, see `Detect uncalled functions (-uncalled-function-checks)`.

Example: `opts.ChecksAssumption.UncalledFunctionCheck = 'all'`

### **UnsignedIntegerOverflows — Behavior of unsigned integer overflows**

allow (default) | forbid | warn-with-wrap-around

*This property affects Code Prover analysis only.*

Enable the check for unsigned integer overflows and the assumptions to make following an overflow, specified as forbid, allow, or warn-with-wrap-around.

For more information, see `Overflow mode for unsigned integer (-unsigned-integer-overflows)`.

Example: `opts.ChecksAssumption.UnsignedIntegerOverflows = 'allow'`

### **CodeProverVerification (Affects Code Prover only)**

#### **ClassAnalyzer — Classes that you want to verify**

none (default) | all | cell array of class names

*This property affects Code Prover analysis only.*

Classes that you want to verify, specified as all, none, or a cell array of class names.

For more information, see `Class (-class-analyzer)`.

Example: `opts.CodeProverVerification.ClassAnalyzer = 'none'`

#### **FunctionsCalledAfterLoop — Functions that the generated main must call after the cyclic code loop**

cell array of function names

*This property affects Code Prover analysis only.*

Functions that the generated main must call after the cyclic code loop, specified as a cell array of function names.

For more information, see `Termination functions (-functions-called-after-loop)`.

Example: `opts.CodeProverVerification.FunctionsCalledAfterLoop = {'func1', 'func2'}`

**FunctionsCalledBeforeLoop — Functions that the generated main must call before the cyclic code loop**

cell array of function names

*This property affects Code Prover analysis only.*

Model Link only. Functions that the generated main must call before the cyclic code loop, specified as a cell array of function names.

For more information, see `Initialization functions (-functions-called-before-loop)`.

Example: `opts.CodeProverVerification.FunctionsCalledBeforeLoop = {'func1', 'func2'}`

**FunctionsCalledInLoop — Functions that the generated main must call in the cyclic code loop**

none (default) | all | cell array of function names

*This property affects Code Prover analysis only.*

Functions that the generated main must call in the cyclic code loop, specified as none, all, or a cell array of function names.

For more information, see `Step functions (-functions-called-in-loop)`.

Example: `opts.CodeProverVerification.FunctionsCalledInLoop = 'all'`

**MainGenerator — Generate a main function if it is not present in source files**

true (default) | false

*This property affects Code Prover analysis only.*

Generate a main function if it is not present in source files, specified as true or false.

For more information, see `Verify` module or library (`-main-generator`).

Example: `opts.CodeProverVerification.MainGenerator = false`

### **VariablesWrittenBeforeLoop — Variables that the generated main must initialize before the cyclic code loop**

`none` (default) | `all` | cell array of variable names

*This property affects Code Prover analysis only.*

Variables that the generated main must initialize before the cyclic code loop, specified as `none`, `all`, or a cell array of variable names.

For more information, see `Parameters` (`-variables-written-before-loop`).

Example: `opts.CodeProverVerification.VariablesWrittenBeforeLoop = 'all'`

### **VariablesWrittenInLoop — Variables that the generated main must initialize in the cyclic code loop**

`none` (default) | `all` | cell array of variable names

*This property affects Code Prover analysis only.*

Variables that the generated main must initialize in the cyclic code loop, specified as `none`, `all`, or a cell array of variable names.

For more information, see `Inputs` (`-variables-written-in-loop`).

Example: `opts.CodeProverVerification.VariablesWrittenInLoop = 'all'`

### **CodingRulesCodeMetrics**

#### **AcAgcSubset — Subset of MISRA AC AGC rules to check**

`OBL-rules` (default) | `OBL-REC-rules` | `single-unit-rules` | `system-decidable-rules` | `all-rules` | `SQ0-subset1` | `SQ0-subset2` | `polyspace.CodingRulesOptions` object | file

Subset of MISRA AC AGC rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see `Check MISRA AC AGC` (`-misra-ac-agc`).
- A MISRA AC AGC custom coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.

- Full path to a file containing your MISRA AC AGC subset. You can create this file manually or in the Polyspace interface. See “Check for Coding Rule Violations”.

To check MISRA AC AGC rules, also set `EnableAcAgc` to true.

Example: `opts.CodingRulesCodeMetrics.AcAgcSubset = 'all-rules'`

Data Types: char

### **AllowedPragmas — Pragma directives for which MISRA C:2004 rule 3.4 or MISRA C++ 16-6-1 must not be applied**

cell array of character vectors

Pragma directives for which MISRA C:2004 rule 3.4 or MISRA C++ 16-6-1 must not be applied, specified as a cell array of character vectors. This property affects only MISRA C:2004 or MISRA AC AGC rule checking.

For more information, see `Allowed pragmas (-allowed-pragmas)`.

Example: `opts.CodingRulesCodeMetrics.AllowedPragmas = {'pragma_01', 'pragma_02'}`

Data Types: cell

### **BooleanTypes — Data types the coding rule checker must treat as effectively Boolean**

cell array of character vectors

Data types that the coding rule checker must treat as effectively Boolean, specified as a cell array of character vectors.

For more information, see `Effective boolean types (-boolean-types)`.

Example: `opts.CodingRulesCodeMetrics.BooleanTypes = {'boolean1_t', 'boolean2_t'}`

Data Types: cell

### **CodeMetrics — Activate code metric calculations**

false (default) | true

Activate code metric calculations, specified as true or false. If this property is turned off, Polyspace does not calculate code metrics even if you upload your results to Polyspace Metrics.

For more information about the code metrics, see `Calculate code metrics (-code-metrics)`.

Example: `opts.CodingRulesCodeMetrics.CodeMetrics = true`

### **CustomRulesSubset — Custom naming conventions to check against**

custom coding rules file

Custom naming conventions to check against, specified as a custom coding rules file. You can create the custom coding rules file manually or in the Polyspace interface.

For more information, see `Check custom rules (-custom-rules)`.

Example: `opts.CodingRulesCodeMetrics.CustomRulesSubset = 'C:\ps_settings\coding_rules\custom_rules.txt'`

Data Types: `char`

### **EnableAcAgc — Check MISRA AC AGC rules**

false (default) | true

Check MISRA AC AGC rules, specified as true or false. To customize which rules are checked, use `AcAgcSubset`.

For more information about the MISRA AC AGC checker, see `Check MISRA AC AGC (-misra-ac-agc)`.

Example: `opts.CodingRulesCodeMetrics.EnableAcAgc = true;`

### **EnableCustomRules — Check custom coding rules**

false (default) | true

Check custom coding rules, specified as true or false. Use with `CustomRulesSubset`.

For more information, see `Check custom rules (-custom-rules)`.

Example: `opts.CodingRulesCodeMetrics.EnableCustomRules = true;`

### **EnableJsfc — Check JSF C++ rules**

false (default) | true

Check JSF C++ rules, specified as true or false. To customize which rules are checked, use `JsfcSubset`.

For more information, see `Check JSF C++ rules (-jsfc-coding-rules)`.

Example: `opts.CodingRulesCodeMetrics.EnableJsf = true;`

### **EnableMisraC — Check MISRA C:2004 rules**

false (default) | true

Check MISRA C:2004 rules, specified as true or false. To customize which rules are checked, use `MisraCSubset`.

For more information, see `Check MISRA C:2004 (-misra2)`.

Example: `opts.CodingRulesCodeMetrics.EnableMisraC = true;`

### **EnableMisraC3 — Check MISRA C:2012 rules**

false (default) | true

Check MISRA C:2012 rules, specified as true or false. To customize which rules are checked, use `MisraC3Subset`.

For more information about the MISRA C:2012 checker, see `Check MISRA C:2012 (-misra3)`.

Example: `opts.CodingRulesCodeMetrics.EnableMisraC3 = true;`

### **EnableMisraCpp — Check MISRA C++:2008 rules**

false (default) | true

Check MISRA C++:2008 rules, specified as true or false. To customize which rules are checked, use `MisraCppSubset`.

For more information about the MISRA C++:2008 checker, see `Check MISRA C++ rules (-misra-cpp)`.

Example: `opts.CodingRulesCodeMetrics.EnableMisraCpp = true;`

### **JsfSubset — Subset of JSF C++ rules to check**

shall-rules (default) | shall-will-rules | all-rules |  
polyspace.CodingRulesOptions object | file

Subset of JSF C++ rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see `Check JSF C++ rules (-jsf-coding-rules)`.
- A JSF C++ custom coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.

- Full path to a file containing your JSF C++ subset. You can create this file manually or from the Polyspace interface. See “Check for Coding Rule Violations”.

To check JSF C++ rules, set `EnableJsfc` to true.

Example: `opts.CodingRulesCodeMetrics.JsfcSubset = 'all-rules'`

Data Types: char

### **Misra3AgcMode — Use the MISRA C:2012 categories for automatically generated code**

false (default) | true

Use the MISRA C:2012 categories for automatically generated code, specified as true or false.

For more information, see [Use generated code requirements \(-misra3-agc-mode\)](#).

Example: `opts.CodingRulesCodeMetrics.Misra3AgcMode = true;`

### **MisraC3Subset — Subset of MISRA C:2012 rules to check**

mandatory-required (default) | mandatory | single-unit-rules | system-decidable-rules | CERT-rules | CERT-all | ISO-17961 | all | SQ0-subset1 | SQ0-subset2 | `polyspace.CodingRulesOptions` object | file

Subset of MISRA C:2012 rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see [Check MISRA C:2012 \(-misra3\)](#).
- A MISRA C:2012 custom coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.
- Full path to a file containing your MISRA C:2012 subset. You can create the custom coding rules file manually or in the Polyspace interface. See “Check for Coding Rule Violations”.

To check MISRA C:2012 rules, also set `EnableMisraC3` to true.

Example: `opts.CodingRulesCodeMetrics.MisraC3Subset = 'all'`

Data Types: char

**MisraCSubset — Subset of MISRA C:2004 rules to check**

required-rules (default) | all-rules | SQ0-subset1 | SQ0-subset2 | single-unit-rules | system-decidable-rules | polyspace.CodingRulesOptions object | file

Subset of MISRA C:2004 rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see `Check MISRA C:2004 (-misra2)`.
- A MISRA C:2004 custom coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.
- Full path to a file containing your MISRA C:2004 subset. You can create the custom coding rules file manually or in the Polyspace interface. See “Check for Coding Rule Violations”.

To check MISRA C:2004 rules, also set `EnableMisraC` to true.

Example: `opts.CodingRulesCodeMetrics.MisraCSubset = 'all-rules'`

Data Types: char

**MisraCppSubset — Subset of MISRA C++ rules**

required-rules (default) | all-rules | CERT-rules | CERT-all | SQ0-subset1 | SQ0-subset2 | polyspace.CodingRulesOptions object | file

Subset of MISRA C++:2008 rules to check, specified by:

- Character vector of one of the subset names. For more information about the different subsets, see `Check MISRA C++ rules (-misra-cpp)`.
- A MISRA C++ coding rules object. To create a custom coding rules object, see `polyspace.CodingRulesOptions`.
- Full path to a file containing your MISRA C++ subset. You can create this file manually or from the Polyspace interface. See “Check for Coding Rule Violations”.

To check MISRA C++ rules, set `EnableMisraCpp` to true.

Example: `opts.CodingRulesCodeMetrics.MisraCppSubset = 'all-rules'`

Data Types: char

### **EnvironmentSettings**

#### **Dos — Consider that file paths are in MS-DOS style**

true (default) | false

Consider that file paths are in MS-DOS style, specified as true or false.

For more information, see `Code from DOS or Windows file system (-dos)`.

Example: `opts.EnvironmentSettings.Dos = true;`

#### **IncludeFolders — Include folders needed for compilation**

cell array of include folder paths

Include folders needed for compilation, specified as a cell array of the include folder paths.

To specify all subfolders of a folder, use folder path followed by `**`, for instance, `'C:\includes\**'`. The notation follows the syntax of the `dir` function. See also “Specify Multiple Source Files”.

For more information, see `-I`.

Example: `opts.EnvironmentSettings.IncludeFolders = {'/includes','/com1/inc'};`

Example: `opts.EnvironmentSettings.IncludeFolders = {'C:\project1\common\includes'};`

Data Types: cell

#### **Includes — Files to be #include-ed by each C file**

cell array of files

Files to be `#include`-ed by each C source file in the analysis, specified by a cell array of files.

For more information, see `Include (-include)`.

Example: `opts.EnvironmentSettings.Includes = {'/inc/inc_file.h','/inc/inc_math.h'};`

#### **NoExternC — Ignore linking errors inside extern blocks**

false (default) | true

Ignore linking errors inside extern blocks, specified as true or false.

For more information, see `Ignore link errors (-no-extern-c)`.

Example: `opts.EnvironmentSettings.NoExternC = false;`

### **PostPreProcessingCommand — Command or script to run on source files after preprocessing**

character vector

Command or script to run on source files after preprocessing, specified as a character vector of the command to run.

For more information, see `Command/script to apply to preprocessed files (-post-preprocessing-command)`.

Example: Linux — `opts.EnvironmentSettings.PostPreProcessingCommand = [pwd, '/replace_keyword.pl']`

Example: Windows — `opts.EnvironmentSettings.PostPreProcessingCommand = ' "C:\Program Files\MATLAB\R2015b\sys\perl\win32\bin\perl.exe" "C:\My_Scripts\replace_keyword.pl" '`

### **StopWithCompileError — Stop analysis if a file does not compile**

false (default) | true

Stop analysis if a file does not compile, specified as true or false.

For more information, see `Stop analysis if a file does not compile (-stop-if-compile-error)`.

Example: `opts.EnvironmentSettings.StopWithCompileError = true;`

### **InputsStubbing**

#### **DataRangeSpecifications — Constrain global variables, function inputs, and return values of stubbed functions**

file path

Constrain global variables, function inputs, and return values of stubbed functions specified by the path to an XML constraint file. For more information about the constraint file, see “Specify External Constraints”.

For more information about this option, see `Constraint setup (-data-range-specifications)`.

```
Example: opts.InputsStubbing.DataRangeSpecifications = 'C:\project
\constraint_file.xml'
```

### **DoNotGenerateResultsFor — Files on which you do not want analysis results**

include-folders (default) | all-headers | custom=*file1[, folder1[, ...]]*

Files on which you do not want analysis results, specified by `include-folders`, `all-headers`, or a character array beginning with `custom=` and containing a list of comma-separated file or folder names.

Use this option with `InputsStubbing.GenerateResultsFor`. For more information, see `Do not generate results for (-do-not-generate-results-for)`.

```
Example: opts.InputsStubbing.DoNotGenerateResultsFor = 'custom=C:
\project\file1.c,C:\project\file2.c'
```

### **GenerateResultsFor — Files on which you want analysis results**

source-headers (default) | all-headers | custom=*file1[, folder1[, ...]]*

Files on which you want analysis results, specified by `source-headers`, `all-headers`, or a character array beginning with `custom=` and containing a comma-separated file or folder names.

Use this option with `InputsStubbing.DoNotGenerateResultsFor`. For more information, see `Generate results for sources and (-generate-results-for)`.

```
Example: opts.InputsStubbing.GenerateResultsFor = 'custom=C:\project
\includes_common_1,C:\project\includes_common_2'
```

### **FunctionsToStub — Functions to stub during analysis**

cell array of function names

*This property affects Code Prover analysis only.*

Functions to stub during analysis, specified as a cell array of function names.

For more information, see .

```
Example: opts.InputsStubbing.FunctionsToStub = {'func1', 'func2'}
```

### **NoDefInitGlob — Consider global variables as uninitialized**

false (default) | true

*This property affects Code Prover analysis only.*

Consider global variables as uninitialized, specified as true or false.

For more information, see .

Example: `opts.InputsStubbing.NoDefInitGlob = true`

### **NoStlStubs — Do not use Polyspace implementations of functions in the Standard Template Library**

false (default) | true

*This property applies only to a Code Prover analysis of C++ code.*

Do not use Polyspace implementations of functions in the Standard Template Library, specified as true or false.

For more information, see .

Example: `opts.InputsStubbing.NoStlStubs = true`

### **StubECoderLookupTables — Specify that the analysis must stub functions in the generated code that use lookup tables**

true (default) | false

*This property applies only to a Code Prover analysis of code generated from models.*

Specify that the analysis must stub functions in the generated code that use lookup tables. By replacing the functions with stubs, the analysis assumes more precise return values for the functions.

For more information, see `Generate stubs for Embedded Coder lookup tables (-stub-embedded-coder-lookup-table-functions)`.

Example: `opts.InputsStubbing.StubECoderLookupTables = true`

## **Macros**

### **DefinedMacros — Macros to be replaced**

cell array of macros

In preprocessed code, macros are replaced by the definition, specified in a cell array of macros and definitions. Specify the macro as `Macro=Value`. If you want Polyspace to ignore the macro, leave the `Value` blank. A macro with no equal sign replaces all instances of that macro by 1.

For more information, see Preprocessor definitions (-D).

Example: `opts.Macros.DefinedMacros = {'uint32=int', 'name3=', 'var'}`

### **UndefinedMacros — Macros to undefine**

cell array of macros

In preprocessed code, macros are undefined, specified by a cell array of macros to undefine.

For more information, see Disabled preprocessor definitions (-U).

Example: `opts.Macros.DefinedMacros = {'name1', 'name2'}`

### **MergedComputingSettings**

#### **AddToResultsRepositoryBugFinder — Upload Bug Finder results to Polyspace Metrics web dashboard**

false (default) | true

*This property affects Bug Finder analysis only.*

Upload Bug Finder analysis results to Polyspace Metrics web dashboard, specified as true or false. To use this option, in your Polyspace preferences, you must specify a metrics server.

For more information, see Upload results to Polyspace Metrics (-add-to-results-repository).

Example: `opts.MergedComputingSettings.AddToResultsRepositoryBugFinder = true;`

#### **AddToResultsRepositoryCodeProver — Upload Code Prover results to Polyspace Metrics web dashboard**

false (default) | true

*This property affects Code Prover analysis only.*

Upload Code Prover analysis results to Polyspace Metrics web dashboard, specified as true or false. To use this option, in your Polyspace preferences, you must specify a metrics server.

For more information, see Upload results to Polyspace Metrics (-add-to-results-repository).

```
Example: opts.MergedComputingSettings.AddToResultsRepositoryCodeProver  
= true;
```

**BatchBugFinder — Send Bug Finder analysis to remote server**

false (default) | true

*This property affects Bug Finder analysis only.*

Send Bug Finder analysis to remote server, specified as true or false. To use this option, in your Polyspace preferences, you must specify a metrics server.

For more information, see [Run Bug Finder or Code Prover analysis on a remote cluster \(-batch\)](#).

```
Example: opts.MergedComputingSettings.BatchBugFinder = true;
```

**BatchCodeProver — Send Code Prover analysis to remote server**

false (default) | true

*This property affects Code Prover analysis only.*

Send Code Prover analysis to remote server, specified as true or false. To use this option, in your Polyspace preferences, you must specify a metrics server.

For more information, see [Run Bug Finder or Code Prover analysis on a remote cluster \(-batch\)](#).

```
Example: opts.MergedComputingSettings.BatchCodeProver = true;
```

**FastAnalysis — Run Bug Finder analysis using faster local mode**

false (default) | true

*This property affects Bug Finder analysis only.*

Use fast analysis mode for Bug Finder analysis, specified as true or false.

For more information, see [Use fast analysis mode for Bug Finder \(-fast-analysis\)](#).

```
Example: opts.MergedComputingSettings.FastAnalysis = true;
```

**MergedReporting****EnableReportGeneration — Generate a report after the analysis**

false (default) | true

After the analysis, generate a report, specified as true or false.

For more information, see `Generate report`.

Example: `opts.MergedReporting.EnableReportGeneration = true`

### **ReportOutputFormat — Output format of generated report**

Word (default) | HTML | PDF

Output format of generated report, specified as one of the report formats. To activate this option, specify `Reporting.EnableReportGeneration`.

For more information about the different values, see `Output format (-report-output-format)`.

Example: `opts.MergedReporting.ReportOutputFormat = 'PDF'`

### **BugFinderReportTemplate — Template for generating Bug Finder analysis report**

BugFinderSummary (default) | BugFinder | SecurityCERT | SecurityCWE | SecurityISO\_17961 | CodeMetrics | CodingRules

*This property affects a Bug Finder analysis only.*

Template for generating analysis report, specified as one of the report formats. To activate this option, specify `Reporting.EnableReportGeneration`.

For more information about the different values, see `Bug Finder and Code Prover report (-report-template)`.

Example: `opts.MergedReporting.BugFinderReportTemplate = 'CodeMetrics'`

### **CodeProverReportTemplate — Template for generating Code Prover analysis report**

Developer (default) | CallHierarchy | CodeMetrics | CodingRules | DeveloperReview | Developer\_withGreenChecks | Quality | VariableAccess

*This property affects a Code Prover analysis only.*

Template for generating analysis report, specified as one of the predefined report formats. To activate this option, specify `Reporting.EnableReportGeneration`.

For more information about the different values, see `Bug Finder and Code Prover report (-report-template)`.

Example: `opts.MergedReporting.CodeProverReportTemplate = 'CodeMetrics'`

## Multitasking

### ArxmlMultitasking — Specify path of ARXML files to parse for multitasking configuration

cell array of file paths

Specify the path to the ARXML files the software parses to set up your multitasking configuration.

To activate this option, specify `Multitasking.EnableExternalMultitasking` and set `Multitasking.ExternalMultitaskingType` to `autosar`.

For more information, see `ARXML files selection (-autosar-multitasking)`

Example: `opts.Multitasking.ArxmlMultitasking={'C:\Polyspace_Workspace\AUTOSAR\myFile.arxml'}`

### CriticalSectionBegin — Functions that begin critical sections

cell array of critical section function names

Functions that begin critical sections specified as a cell array of critical section function names. To activate this option, specify `Multitasking.EnableMultitasking` and `Multitasking.CriticalSectionEnd`.

For more information, see `Critical section details (-critical-section-begin -critical-section-end)`.

Example: `opts.Multitasking.CriticalSectionBegin = {'function1:cs1', 'function2:cs2'}`

### CriticalSectionEnd — Functions that end critical sections

cell array of critical section function names

Functions that end critical sections specified as a cell array of critical section function names. To activate this option, specify `Multitasking.EnableMultitasking` and `Multitasking.CriticalSectionBegin`.

For more information, see `Critical section details (-critical-section-begin -critical-section-end)`.

Example: `opts.Multitasking.CriticalSectionEnd = {'function1:cs1', 'function2:cs2'}`

### **CyclicTasks — Specify functions that represent cyclic tasks**

cell array of function names

Specify functions that represent cyclic tasks.

To activate this option, also specify `Multitasking.EnableMultitasking`.

For more information, see `Cyclic tasks (-cyclic-tasks)`.

Example: `opts.Multitasking.CyclicTasks = {'function1','function2'}`

### **EnableConcurrencyDetection — Enable automatic detection of certain families of threading functions**

false (default) | true

*This property affects Code Prover analysis only.*

Enable automatic detection of certain families of threading functions, specified as true or false.

For more information, see `Enable automatic concurrency detection for Code Prover (-enable-concurrency-detection)`.

Example: `opts.Multitasking.EnableConcurrencyDetection = true`

### **EnableExternalMultitasking — Enable automatic multitasking configuration from external file definitions**

false (default) | true

Enable multitasking configuration of your projects from external files you provide. Configure multitasking from ARXML files for an AUTOSAR project, or from OIL files for an OSEK project.

Activate this option to enable `Multitasking.ArxmlMultitasking` or `Multitasking.OsekMultitasking`.

For more information, see `OIL files selection (-osek-multitasking)` and `ARXML files selection (-autosar-multitasking)`.

Example: `opts.Multitasking.EnableExternalMultitasking = 1`

### **EnableMultitasking — Configure multitasking manually**

false (default) | true

Configure multitasking manually by specifying `true`. This property activates the other manual, multitasking properties.

For more information, see `Configure multitasking manually`.

Example: `opts.Multitasking.EnableMultitasking = 1`

### **EntryPointNames — Functions that serve as entry-points to your multitasking application**

cell array of entry-point function names

Functions that serve as entry-points to your multitasking application specified as a cell array of entry-point function names. To activate this option, also specify `Multitasking.EnableMultitasking`.

For more information, see `Tasks (-entry-points)`.

Example: `opts.Multitasking.EntryPoints = {'function1','function2'}`

### **ExternalMultitaskingType — Specify type of file to parse for multitasking configuration**

`osek` (default) | `autosar`

Specify the type of file the software parses to set up your multitasking configuration:

- For `osek` type, the analysis looks for OIL files in the file or folder paths that you specify.
- For `autosar` type, the analysis looks for ARXML files in the file paths that you specify.

To activate this option, specify `Multitasking.EnableExternalMultitasking`.

For more information, see `OIL files selection (-osek-multitasking)` and `ARXML files selection (-autosar-multitasking)`.

Example: `opts.Multitasking.ExternalMultitaskingType = 'autosar'`

### **InterruptNames — Specify functions that represent nonpreemptable interrupts**

cell array of function names

Specify functions that represent nonpreemptable interrupts.

To activate this option, specify `Multitasking.EnableMultitasking`.

For more information, see `Interrupts (-interrupts)`.

Example: `opts.Multitasking.Interrupts = {'function1','function2'}`

### **InterruptsDisableAll — Specify routine that disable interrupts**

cell array with one function name

*This property affects Bug Finder analysis only.*

Specify function that disables all interrupts.

To activate this option, specify `Multitasking.EnableMultitasking`.

For more information, see `Disabling all interrupts (-routine-disable-interrupts -routine-enable-interrupts)`.

Example: `opts.Multitasking.InterruptsDisableAll = {'function'}`

### **InterruptsEnableAll — Specify routine that reenables interrupts**

cell array with one function name

*This property affects Bug Finder analysis only.*

Specify function that reenables all interrupts.

To activate this option, specify `Multitasking.EnableMultitasking`.

For more information, see `Disabling all interrupts (-routine-disable-interrupts -routine-enable-interrupts)`.

Example: `opts.Multitasking.InterruptsEnableAll = {'function'}`

### **OsekMultitasking — Specify path of OIL files to parse for multitasking configuration**

`auto (default) | custom=file1[, folder1[, ...]]`

Specify the path to the OIL files the software parses to set up your multitasking configuration:

- In `auto` mode, the analysis uses OIL files in your project source and include folders, but not their subfolders.
- In `custom` mode, the analysis uses the OIL files at the specified path, and the path subfolders.

To activate this option, specify `Multitasking.EnableExternalMultitasking` and set `Multitasking.ExternalMultitaskingType` to `osek`.

For more information, see `OIL files selection (-osek-multitasking)`

Example: `opts.Multitasking.OsekMultitasking = 'custom=file_path, dir_path'`

### **TemporalExclusion — Entry-point functions that cannot execute concurrently**

cell array of entry-point function names

Entry-point functions that cannot execute concurrently specified as a cell array of entry-point function names. Each set of exclusive tasks is one cell array entry with functions separated by spaces. To activate this option, specify `Multitasking.EnableMultitasking`.

For more information, see `Temporally exclusive tasks (-temporal-exclusions-file)`.

Example: `opts.Multitasking.TemporalExclusion = {'function1 function2', 'function3 function4 function5'}` where `function1` and `function2` are temporally exclusive, and `function3`, `function4`, and `function 5` are temporally exclusive.

### **Precision (Affects Code Prover Only)**

#### **ContextSensitivity — Store call context information to identify function call that caused errors**

`none` (default) | `auto` | `custom=function1[,function2[,...]]`

*This property affects Code Prover analysis only.*

Store call context information to identify a function call that caused errors, specified as `none`, `auto`, or as a character array beginning with `custom=` followed by a list of comma-separated function names.

For more information, see `Sensitivity context (-context-sensitivity)`.

Example: `opts.Precision.ContextSensitivity = 'auto'`

Example: `opts.Precision.ContextSensitivity = 'custom=func1'`

#### **ModulesPrecision — Source files you want to verify at higher precision**

cell array of file names and precision levels

*This property affects Code Prover analysis only.*

Source files that you want to verify at higher precision, specified as a cell array of file names without the extension and precision levels using this syntax: `filename:0level`

For more information, see `Specific precision (-modules-precision)`.

Example: `opts.Precision.ModulesPrecision = {'file1:00', 'file2:03'}`

### **0Level – Precision level for the verification**

2 (default) | 0 | 1 | 3

*This property affects Code Prover analysis only.*

Precision level for the verification, specified as 0, 1, 2, or 3.

For more information, see `Precision level (-0)`.

Example: `opts.Precision.0Level = 3`

### **PathSensitivityDelta – Avoid certain verification approximations for code with fewer lines**

positive integer

*This property affects Code Prover analysis only.*

Avoid certain verification approximations for code with fewer lines, specified as a positive integer representing how sensitive the analysis is. Higher values can increase verification time exponentially.

For more information, see `Improve precision of interprocedural analysis (-path-sensitivity-delta)`.

Example: `opts.Precision.PathSensitivityDelta = 2`

### **Timeout – Time limit on your verification**

character vector

*This property affects Code Prover analysis only.*

Time limit on your verification, specified as a character vector of time in hours.

For more information, see `Verification time limit (-timeout)`.

Example: `opts.Precision.Timeout = '5.75'`

### **To – Number of times the verification process runs**

Software Safety Analysis level 2 (default) | Software Safety Analysis level 0 | Software Safety Analysis level 1 | Software Safety Analysis

level 3 | Software Safety Analysis level 4 | Source Compliance Checking  
| other

*This property affects Code Prover analysis only.*

Number of times the verification process runs, specified as one of the preset analysis levels.

For more information, see `Verification level (-to)`.

Example: `opts.Precision.To = 'Software Safety Analysis level 3'`

### **Scaling (Affects Code Prover Only)**

#### **Inline — Functions on which separate results must be generated for each function call**

cell array of function names

*This property affects Code Prover analysis only.*

Functions on which separate results must be generated for each function call, specified as a cell array of function names.

For more information, see `Inline (-inline)`.

Example: `opts.Scaling.Inline = {'func1', 'func2'}`

#### **KLimiting — Limit depth of analysis for nested structures**

positive integer

*This property affects Code Prover analysis only.*

Limit depth of analysis for nested structures, specified as a positive integer indicating how many levels into a nested structure to verify.

For more information, see `Depth of verification inside structures (-k-limiting)`.

Example: `opts.Scaling.KLimiting = 3`

### TargetCompiler

#### Compiler — Compiler that builds your source code

generic (default) | gnu3.4 | gnu4.6 | gnu4.7 | gnu4.8 | gnu4.9 | gnu5.x | gnu6.x | clang3.x | visual9.0 | visual10 | visual11.0 | visual12.0 | visual14.0 | keil | iar | codewarrior | diab | greenhills | iar-ew | renesas | tasking | ti

Compiler that builds your source code.

For more information, see `Compiler` (`-compiler`).

Example: `opts.TargetCompiler.Compiler = 'Visual11.0'`

#### CppVersion — Specify C++11 standard version followed in code

defined-by-compiler (default) | cpp03 | cpp11 | cpp14

Specify C++ standard version followed in code, specified as a character vector.

For more information, see `C++ standard version` (`-cpp-version`).

Example: `opts.TargetCompiler.CppVersion = 'cpp11';`

#### CVersion — Specify C standard version followed in code

defined-by-compiler (default) | c90 | c99 | c11

Specify C standard version followed in code, specified as a character vector.

For more information, see `C standard version` (`-c-version`).

Example: `opts.TargetCompiler.CVersion = 'c90';`

#### DivRoundDown — Round down quotients from division or modulus of negative numbers

false (default) | true

Round down quotients from division or modulus of negative numbers, specified as true or false.

For more information, see `Division round down` (`-div-round-down`).

Example: `opts.TargetCompiler.DivRoundDown = true`

#### EnumTypeDefinition — Base type representation of enum

defined-by-compiler (default) | auto-signed-first | auto-unsigned-first

Base type representation of enum, specified by an allowed base-type set. For more information about the different values, see `Enum type definition (-enum-type-definition)`.

Example: `opts.TargetCompiler.EnumTypeDefinition = 'auto-unsigned-first'`

### **IgnorePragmaPack — Ignore #pragma pack directives**

false (default) | true

Ignore #pragma pack directives, specified as true or false.

For more information, see `Ignore pragma pack directives (-ignore-pragmapack)`.

Example: `opts.TargetCompiler.IgnorePragmaPack = true`

### **Language — Language of analysis**

C - CPP (default) | C | CPP

This property is read-only.

Language of the analysis, specified during the object construction. This value changes which properties appear.

For more information, see `Source code language (-lang)`.

### **LogicalSignedRightShift — Treatment of signed bit on signed variables**

Arithmetical (default) | Logical

Treatment of signed bit on signed variables, specified as `Arithmetical` or `Logical`. For more information, see `Signed right shift (-logical-signed-right-shift)`.

Example: `opts.TargetCompiler.LogicalSignedRightShift = 'Logical'`

### **NoUliterals — Do not use predefined typedefs for char16\_t or char32\_t**

false (default) | true

Do not use predefined typedefs for `char16_t` or `char32_t`, specified as true or false. For more information, see `Block char16/32_t types (-no-uliterals)`.

Example: `opts.TargetCompiler.NoUliterals = true`

### **PackAlignmentValue — Default structure packing alignment**

defined-by-compiler (default) | 1 | 2 | 4 | 8 | 16

Default structure packing alignment, specified as `defined-by-compiler`, `1,2`, `4`, `8`, or `16`. This property is available only for Visual C++ code.

For more information, see `Pack alignment value (-pack-alignment-value)`.

Example: `opts.TargetCompiler.PackAlignmentValue = '4'`

### **SfrTypes — sfr types**

cell array of `sfr` keywords

`sfr` types, specified as a cell array of `sfr` keywords using the syntax `sfr_name=size_in_bits`. For more information, see `Sfr type support (-sfr-types)`.

This option only applies when you set `TargetCompiler.Compiler` to `keil` or `iar`.

Example: `opts.TargetCompiler.SfrTypes = {'sfr32=32'}`

### **SizeTTypeIs — Underlying type of size\_t**

`defined-by-compiler` (default) | `unsigned-int` | `unsigned-long` | `unsigned-long-long`

Underlying type of `size_t`, specified as `defined-by-compiler`, `unsigned-int`, `unsigned-long`, or `unsigned-long-long`. See `Management of size_t (-size-t-type-is)`.

Example: `opts.TargetCompiler.SizeTTypeIs = 'unsigned-long'`

### **Target — Target processor**

`i386` (default) | `arm` | `arm64` | `avr` | `c-167` | `c166` | `c18` | `c28x` | `c6000` | `coldfire` | `hc08` | `hc12` | `m68k` | `mcore` | `mips` | `mpc5xx` | `msp430` | `necv850` | `powerpc` | `powerpc64` | `rh850` | `rl78` | `rx` | `s12z` | `sharc21x61` | `sparc` | `superh` | `tms320c3x` | `tricore` | `x86_64` | generic target object

Set size of data types and endianness of processor, specified as one of the predefined target processors or a generic target object.

For more information about the predefined processors, see `Target processor type (-target)`.

For more information about creating a generic target, see `polyspace.GenericTargetOptions`.

Example: `opts.TargetCompiler.Target = 'hc12'`

**WcharTTypeIs — Underlying type of wchar\_t**

defined-by-compiler (default) | signed-short | unsigned-short | signed-int | unsigned-int | signed-long | unsigned-long

Underlying type of `wchar_t`, specified as `defined-by-compiler`, `signed-short`, `unsigned-short`, `signed-int`, `unsigned-int`, `signed-long`, or `unsigned-long`. See Management of `wchar_t` (`-wchar-t-type-is`).

Example: `opts.TargetCompiler.WcharTTypeIs = 'unsigned-int'`

**VerificationAssumption (Affects Code Prover Only)****ConsiderVolatileQualifierOnFields — Assume that volatile qualified structure fields can have all possible values at any point in code**

false (default) | true

*This property affects Code Prover analysis only.*

Assume that volatile qualified structure fields can have all possible values at any point in code.

For more information, see Consider volatile qualifier on fields (`-consider-volatile-qualifier-on-fields`).

Example: `opts.VerificationAssumption.ConsiderVolatileQualifierOnFields = true`

**ConstraintPointersMayBeNull — Specify that environment pointers can be NULL unless constrained otherwise**

false (default) | true

*This property affects Code Prover analysis only.*

Specify that environment pointers can be NULL unless constrained otherwise.

For more information, see Consider environment pointers as unsafe (`-stubbed-pointers-are-unsafe`).

Example: `opts.VerificationAssumption.ConstraintPointersMayBeNull = true`

**FloatRoundingMode — Rounding modes to consider when determining the results of floating-point arithmetic**

to-nearest (default) | all

*This property affects Code Prover analysis only.*

Rounding modes to consider when determining the results of floating-point arithmetic, specified as `to-nearest` or `all`.

For more information, see `Float rounding mode (-float-rounding-mode)`.

Example: `opts.VerificationAssumption.FloatRoundingMode = 'all'`

### **RespectTypesInFields — Do not cast nonpointer fields of a structure to pointers**

`false` (default) | `true`

*This property affects Code Prover analysis only.*

Do not cast nonpointer fields of a structure to pointers, specified as `true` or `false`.

For more information, see `Respect types in fields (-respect-types-in-fields)`.

Example: `opts.VerificationAssumption.RespectTypesInFields = true`

### **RespectTypesInGlobals — Do not cast nonpointer global variables to pointers**

`false` (default) | `true`

*This property affects Code Prover analysis only.*

Do not cast nonpointer global variables to pointers, specified as `true` or `false`.

For more information, see `Respect types in global variables (-respect-types-in-globals)`.

Example: `opts.VerificationAssumption.RespectTypesInGlobals = true`

### **Other Properties**

#### **Author — Project author**

username of current user (default) | character vector

Name of project author, specified as a character vector.

For more information, see `-author`.

Example: `opts.Author = 'JaneDoe'`

**ImportComments — Import comments and justifications from previous analysis**

character vector

To import comments and justifications from a previous analysis, specify the path to the results folder of the previous analysis.

For more information, see `-import-comments`

```
Example: opts.ImportComments =  
fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example'  
, 'Module_1', 'BF_Result')
```

**Prog — Project name**

PolyspaceProject (default) | character vector

Project name, specified as a character vector.

For more information, see `-prog`.

```
Example: opts.Prog = 'myProject'
```

**ResultsDir — Location to store results**

folder path

Location to store results, specified as a folder path. By default, the results are stored in the current folder.

For more information, see `-results-dir`.

```
Example: opts.ResultsDir = 'C:\project\myproject\results\'
```

**Sources — Source files**

cell array of files

Source files to analyze, specified as a cell array of files.

To specify all files in a folder, use folder path followed by `*`, for instance, `'C:\src\*'`. To specify all files in a folder and its subfolders, use folder path followed by `**`, for instance, `'C:\src\**'`. The notation follows the syntax of the `dir` function. See also “Specify Multiple Source Files”.

For more information, see `-sources`.

```
Example: opts.Sources = {'file1.c', 'file2.c', 'file3.c'}
```

```
Example: opts.Sources = {'project/src1/file1.c', 'project/src2/  
file2.c', 'project/src3/file3.c'}
```

### **Version — Project version number**

1.0 (default) | character array of a number

Version number of project, specified as a character array of a number. This option is useful if you upload your results to Polyspace Metrics. If you increment version numbers each time that you reanalyze your object, you can compare the results from two versions in Polyspace Metrics.

For more information, see `-v[ersion]`.

```
Example: opts.Version = '2.3'
```

## **See Also**

### **Topics**

“Analysis Options”

**Introduced in R2017a**

# copyTo

**Class:** polyspace.Options

**Package:** polyspace

Copy common settings between Polyspace options objects

## Syntax

```
optsFrom.copyTo(optsTo)
```

## Description

`optsFrom.copyTo(optsTo)` copies the common options from `optsFrom` to `optsTo`. The options objects do not need to be the same type of options object. This method copies only properties that are common between the two objects.

## Input Arguments

**optsFrom** — Options object you want to copy properties from

`polyspace.Options` or `polyspace.ModelLinkOptions` object

Option object that you want to copy properties from, specified as a `polyspace.Options` or `polyspace.ModelLinkOptions` object.

Example: `opts = polyspace.Options;`

**optsTo** — Options object you want to copy properties to

`polyspace.Options` object

Option object that you want to copy properties to, specified as a `polyspace.Options` or `polyspace.ModelLinkOptions` object.

Example: `opts = polyspace.Options;`

# Examples

### Copy Polyspace Options Object

This example shows how to set the properties of one options object and then copy that object to another one.

Create a Polyspace options object and set properties.

```
opts1 = polyspace.Options();  
opts1.Prog = 'DataRaceProject';  
opts1.Sources = {'datarace.c'};  
opts1.TargetCompiler.Compiler = 'diab';
```

Create another object and use `copyTo` to copy over options from the previous object.

```
opts2 = polyspace.Options();  
copyTo(opts1, opts2);
```

### See Also

[polyspace.BugFinderOptions](#) | [polyspace.ModelLinkBugFinderOptions](#) | [polyspace.Options](#) | [polyspace.Options.generateProject](#)

**Introduced in R2016b**

# generateProject

**Class:** polyspace.Options

**Package:** polyspace

Generate psprj project from options object

## Syntax

```
opts.generateProject(projectName)
```

## Description

`opts.generateProject(projectName)` creates a `.psprj` project called `projectName` from the options specified in the `polyspace.Options` object `opts`.

## Input Arguments

### **opts** — Options object to convert into a psprj file

`polyspace.Options` or `polyspace.ModelLinkOptions` object

Option object to convert into a `psprj` file specified as a `polyspace.Options` or `polyspace.ModelLinkOptions` object.

Example: `opts = polyspace.Options;`

### **projectName** — Project file name

character vector

Project file name specified as a character vector. This argument is used as the name of the `psprj` file.

Example: `'myProject'`

## Examples

### Generate Project from a Bug Finder Options Object

This example shows how to create and use a Polyspace project that was generated from an options object.

Create a Bug Finder object and set properties.

```
sources = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', ...  
    'sources', 'numerical.c');  
opts = polyspace.Options();  
opts.Prog = 'MyProject';  
opts.Sources = {sources};  
opts.TargetCompiler.Compiler = 'gnu4.7';
```

Generate a Polyspace project. Name the project using the Prog property.

```
psprj = opts.generateProject(opts.Prog);
```

Run a Bug Finder analysis using one of these commands. Both commands produce identical analysis results. The only difference is that the `psprj` project can be rerun in the Polyspace interface.

```
polyspaceBugFinder(psprj, '-nodesktop');  
polyspaceBugFinder(opts);
```

To run a Code Prover analysis, use `polyspaceCodeProver` instead of `polyspaceBugFinder`.

## Tips

If you want to include an options object in a `pslinkoptions` object:

- 1 Use this method to convert your object to a project.
- 2 Add the project to the `pslinkoptions` property `PrjConfig`.
- 3 Turn on the property `EnablePrjConfig`.

## See Also

`polyspace.BugFinderOptions` | `polyspace.ModelLinkBugFinderOptions` |  
`polyspace.Options` | `polyspace.Options.copyTo`

**Introduced in R2016b**

## toScript

**Class:** polyspace.Options

**Package:** polyspace

Add Polyspace options object definition to a script

## Syntax

```
filePath = opts.toScript(fileName,positionInScript)
```

## Description

`filePath = opts.toScript(fileName,positionInScript)` adds the properties of a `polyspace.Options` object to a MATLAB script. The script shows the values assigned to all the properties of the object. You can run the script later to define the object in the MATLAB workspace and use it.

## Input Arguments

### **opts** — Options object with Polyspace analysis options

`polyspace.Options` or `polyspace.ModelLinkOptions` object

Option object to store in MATLAB script, specified as a `polyspace.Options` or `polyspace.ModelLinkOptions` object.

Example: `opts = polyspace.Options;`

### **fileName** — Script name

character vector

Name or path to script, specified as a character vector. If you specify a relative path, the script is created in subfolder of the current working folder.

Example: `'runPolyspace.m'`

**positionInScript — Where to add object definition**

'create' (default) | 'append'

Position in script where the object properties are added, specified as 'create' or 'append'. If you specify 'append', the object properties are added to the end of an existing script. Otherwise, a new script is created.

## Output Arguments

**filePath — Full path to script**

character vector

Full path to script, specified as a character vector.

Example: 'C:\myScripts\runPolyspace.m'

## See Also

[polyspace.BugFinderOptions](#) | [polyspace.ModelLinkBugFinderOptions](#) | [polyspace.Options](#) | [polyspace.Options.generateProject](#)

## Topics

“Generate MATLAB Scripts from Polyspace User Interface”

**Introduced in R2017b**

# run

**Class:** polyspace.Project

**Package:** polyspace

Run a Polyspace analysis

## Syntax

```
proj.run(product)
```

## Description

`status = proj.run(product)` runs a Polyspace Bug Finder or Polyspace Code Prover analysis using the configuration specified in the `polyspace.Project` object `proj`. The analysis results are also stored in `proj`.

## Input Arguments

**proj** — Polyspace project

`polyspace.Project` object

Polyspace project with configuration and results, specified as a `polyspace.Project` object.

**product** — Type of analysis

'bugFinder' | 'codeProver'

Type of analysis to run.

## Output Arguments

**status** — Results of a Code Prover analysis

true | false

Status of analysis. If the analysis fails, the status is `false`. Otherwise, it is `true`.

The analysis can fail for multiple reasons:

- You provide source files that do not exist.
- None of your files compile. Even if one file compiles, unless you set the property `StopWithCompileError` to `true`, the analysis succeeds and returns a `true` status.

There can be many other reasons why the analysis fails. If the analysis fails, in your results folder, check the log file. You can see the results folder using the `Configuration` property of the `polyspace.Project` object:

```
proj = polyspace.Project;  
proj.Configuration.ResultsDir
```

The log file is named `Polyspace_R20##n_ProjectName_date-time.log`.

## Examples

### Read Results to MATLAB Tables

Run a Polyspace Bug Finder analysis on the demo file `numerical.c`. Configure these options:

- Specify GCC 4.9 as your compiler.
- Save the results in a `results` subfolder of the current working folder.

```
proj = polyspace.Project  
  
% Configure analysis  
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', ...  
    'examples', 'cxx', 'Bug_Finder_Example', 'sources', 'numerical.c')};  
proj.Configuration.TargetCompiler.Compiler = 'gnu4.9';  
proj.Configuration.ResultsDir = fullfile(pwd, 'results');  
  
% Run analysis  
bfStatus = proj.run('bugFinder');
```

```
% Read results  
bfSummary = proj.Results.getSummary('defects');
```

**Introduced in R2017b**

# getSummary

**Class:** polyspace.BugFinderResults

**Package:** polyspace

View number of defects organized by defect type

## Syntax

```
resObj.getSummary(resultsType)
```

## Description

`resSummary = resObj.getSummary(resultsType)` returns the distribution of results of type `resultsType` in a Bug Finder result set denoted by the `polyspace.BugFinderResults` object `resObj`. For instance, if you choose to see defects, you can see how many defects of each type are present in the result set, for instance, how many non-initialized variables or declaration mismatches.

## Input Arguments

**resultsType** — Type of Bug Finder analysis result

'defects' (default) | 'misraC' | 'misraCAGC' | 'misraCPP' | 'misraC2012' | 'jsf' | 'metrics' | 'customRules'

Type of result, specified as a character vector.

Entry	Meaning
'defects'	Bugs or defects. See “Defects”.
'misraC'	MISRA C:2004 rules. See “MISRA C:2004 and MISRA AC AGC Rules”.

Entry	Meaning
'misraCAGC'	MISRA C:2004 rules for generated code. See "MISRA C:2004 and MISRA AC AGC Rules".
'misraCPP'	MISRA C++ rules. See "MISRA C++:2008 Rules".
'misraC2012'	MISRA C:2012 rules. See "MISRA C:2012 Directives and Rules".
'jsf'	JSF C++ rules. See "JSF C++ Rules".
'metrics'	Code complexity metrics. See "Code Metrics".
'customRules'	Custom rules enforcing naming conventions for identifiers. See "Custom Coding Rules".

## Output Arguments

### resSummary — Distribution of defects by defect type

table

Distribution of defects by defect type, specified as a table. For instance, an extract of the table looks like this:

Category	Defect	Impact	Total
Concurrency	Data race	High	2
Concurrency	Deadlock	High	1
Data flow	Non-initialized variable	High	2

The table above shows that the result set contains two data races, one deadlock and two non-initialized variables.

For more information on MATLAB tables, see "Tables" (MATLAB).

## Examples

### Copy Existing Results to MATLAB Tables

This example shows how to read Bug Finder analysis results from MATLAB.

Copy a demo result set to a temporary folder.

```
resPath = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', ...
    'Module_1', 'BF_Result');
userResPath = tempname;
copyfile(resPath, userResPath);
```

Create the results object.

```
resObj = polyspace.BugFinderResults(userResPath);
```

Read results to MATLAB tables using the object.

```
resSummary = resObj.getSummary('defects');
resTable = resObj.getResults();
```

### Run Analysis and Read Results to MATLAB Tables

Run a Polyspace Bug Finder analysis on the demo file `numerical.c`. Configure these options:

- Specify GCC 4.9 as your compiler.
- Save the results in a `results` subfolder of the current working folder.

```
proj = polyspace.Project

% Configure analysis
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', ...
    'examples', 'cxx', 'Bug_Finder_Example', 'sources', 'numerical.c')};
proj.Configuration.TargetCompiler.Compiler = 'gnu4.9';
proj.Configuration.ResultsDir = fullfile(pwd, 'results');

% Run analysis
bfStatus = proj.run('bugFinder');
```

```
% Read results  
bfSummary = proj.Results.getSummary('defects');
```

### See Also

`polyspace.BugFinderResults`

### Topics

“Defects”

“Bug Finder Defect Groups”

“Classification of Defects by Impact”

**Introduced in R2017a**

# getResults

**Class:** polyspace.BugFinderResults

**Package:** polyspace

Read Bug Finder results into MATLAB table

## Syntax

```
getResults(content)
```

## Description

`resTable = getResults(content)` returns a table showing all results in a Bug Finder result set denoted by the `polyspace.BugFinderResults` object `resObj`. You can manipulate the table to produce graphs and statistics about your results that you cannot obtain readily from the user interface.

## Input Arguments

**content** — Result information to include

'full' (default) | 'readable'

Amount of information to be included for each result. If you specify 'full', all information is included. See “Export Polyspace Analysis Results”. If you specify 'readable', the following information is not included:

- ID: Unique number for a result for the current analysis.
- Group: Defect groups, MISRA C:2012 groups, etc.
- Status, Severity, Comment: Information that *you* enter about a result.

If you do not specify this argument, the full table is included.

## Output Arguments

### **resTable — Results of a Bug Finder analysis**

table

Table showing all results from a single Bug Finder analysis. For each result, the table has information such as file, family, and so on. If a particular information is not available for a result, the entry in the table states `<undefined>`.

For more information on:

- The columns of the table, see “Export Polyspace Analysis Results”.
- MATLAB tables, see “Tables” (MATLAB).

## Examples

### **Copy Existing Results to MATLAB Tables**

This example shows how to read Bug Finder analysis results from MATLAB.

Copy a demo result set to a temporary folder.

```
resPath = fullfile(matlabroot, 'polyspace', 'examples', 'cxx', 'Bug_Finder_Example', ...  
'Module_1', 'BF_Result');  
userResPath = tempname;  
copyfile(resPath, userResPath);
```

Create the results object.

```
resObj = polyspace.BugFinderResults(userResPath);
```

Read results to MATLAB tables using the object.

```
resSummary = getSummary (resObj);  
resTable = getResults (resObj);
```

### **Run Analysis and Read Results to MATLAB Tables**

Run a Polyspace Bug Finder analysis on the demo file `numerical.c`. Configure these options:

- Specify GCC 4.9 as your compiler.
- Save the results in a `results` subfolder of the current working folder.

```
proj = polyspace.Project

% Configure analysis
proj.Configuration.Sources = {fullfile(matlabroot, 'polyspace', ...
    'examples', 'cxx', 'Bug_Finder_Example', 'sources', 'numerical.c')};
proj.Configuration.TargetCompiler.Compiler = 'gnu4.9';
proj.Configuration.ResultsDir = fullfile(pwd, 'results');

% Run analysis
bfStatus = proj.run('bugFinder');

% Read results
bfSummary = proj.Results.getResults('readable');
```

## See Also

`polyspace.BugFinderResults`

**Introduced in R2017a**



# MISRA C 2012

---

## MISRA C:2012 Dir 1.1

Any implementation-defined behavior on which the output of the program depends shall be documented and understood

### Description

#### Directive Definition

*Any implementation-defined behavior on which the output of the program depends shall be documented and understood.*

#### Rationale

A code construct has implementation-defined behavior if the C standard allows compilers to choose their own specifications for the construct. The full list of implementation-defined behavior is available in Annex J.3 of the standard ISO/IEC 9899:1999 (C99) and in Annex G.3 of the standard ISO/IEC 9899:1990 (C90).

If you understand and document all implementation-defined behavior, you can be assured that all output of your program is intentional and not produced by chance.

#### Polyspace Specification

The analysis detects the following possibilities of implementation-defined behavior in C99 and their counterparts in C90. If you know the behavior of your compiler implementation, justify the analysis result with appropriate comments. To justify a result, assign one of these statuses: `Justified`, `No action planned`, or `Not a defect`.

---

**Tip** To mass-justify all results that indicate the same implementation-defined behavior, use the **Detail** column on the **Results List** pane. Click the column header so that all results with the same entry are grouped together. Select the first result and then select the last result while holding the `Shift` key. Assign a status to one of the results. If you do not see the **Detail** column, right-click any other column header and enable this column.

---

C99 Standard Annex Ref	Behavior to Be Documented	How Polyspace Helps
J.3.2: Environment	An alternative manner in which <code>main</code> function may be defined.	<p>The analysis flags <code>main</code> with arguments and return types other than:</p> <pre>int main(void) { ... }</pre> <p>or</p> <pre>int main(int argc, char *argv[]) { ... }</pre> <p>See section 5.1.2.2.1 of the C99 Standard.</p>
J.3.2: Environment	The set of environment names and the method for altering the environment list used by the <code>getenv</code> function.	<p>The analysis flags uses of the <code>getenv</code> function. For this function, you need to know the list of environment variables and how the list is modified.</p> <p>See section 7.20.4.5 of the C99 Standard.</p>
J.3.6: Floating Point	The rounding behaviors characterized by non-standard values of <code>FLT_ROUNDS</code> .	<p>The analysis flags the include of <code>float.h</code> if values of <code>FLT_ROUNDS</code> are outside the set, <code>{-1, 0, 1, 2, 3}</code>. Only the values in this set lead to well-defined rounding behavior.</p> <p>See section 5.2.4.2.2 of the C99 Standard.</p>
J.3.6: Floating Point	The evaluation methods characterized by non-standard negative values of <code>FLT_EVAL_METHOD</code> .	<p>The analysis flags the include of <code>float.h</code> if values of <code>FLT_EVAL_METHOD</code> are outside the set, <code>{-1, 0, 1, 2}</code>. Only the values in this set lead to well-defined behavior for floating-point operations.</p> <p>See section 5.2.4.2.2 of the C99 Standard.</p>

C99 Standard Annex Ref	Behavior to Be Documented	How Polyspace Helps
J.3.6: Floating Point	The direction of rounding when an integer is converted to a floating-point number that cannot exactly represent the original value.	The analysis flags conversions from integer to floating-point data types of smaller size (for example, 64-bit int to 32-bit float).  See section 6.3.1.4 of the C99 Standard.
J.3.6: Floating Point	The direction of rounding when a floating-point number is converted to a narrower floating-point number.	The analysis flags these conversions: <ul style="list-style-type: none"> <li>• double to float</li> <li>• long double to double or float</li> </ul> See section 6.3.1.5 of the C99 Standard.
J.3.6: Floating Point	The default state for the FENV_ACCESS pragma.	The analysis flags use of the pragma other than:  #pragma STDC FENV_ACCESS ON  or  #pragma STDC FENV_ACCESS OFF  See section 7.6.1 of the C99 Standard.
J.3.6: Floating Point	The default state for the FP_CONTRACT pragma.	The analysis flags use of the pragma other than:  #pragma STDC FP_CONTRACT ON  or  #pragma STDC FP_CONTRACT OFF  See section 7.12.2 of the C99 Standard.

C99 Standard Annex Ref	Behavior to Be Documented	How Polyspace Helps
J.3.11: Preprocessing Directives	The behavior on each recognized non-STDC <code>#pragma</code> directive.	The analysis flags the pragma usage: <code>#pragma pp-tokens</code> where the processing token STDC does not immediately follow <code>pragma</code> . For instance: <code>#pragma FENV_ACCESS ON</code> See section 6.10.6 of the C99 Standard.
J.3.12: Library Functions	Whether the <code>feraiseexcept</code> function raises the "inexact" floating-point exception in addition to the "overflow" or "underflow" floating-point exception.	The analysis flags calls to the <code>feraiseexcept</code> function. See section 7.6.2.3 of the C99 Standard.
J.3.12: Library Functions	Strings other than "C" and "" that may be passed as the second argument to the <code>setlocale</code> function.	The analysis flags calls to the <code>setlocale</code> function when its second argument is not "C" or "". See section 7.11.1.1 of the C99 Standard.
J.3.12: Library Functions	The types defined for <code>float_t</code> and <code>double_t</code> when the value of the <code>FLT_EVAL_METHOD</code> macro is less than 0 or greater than 2.	The analysis flags the include of <code>math.h</code> if <code>FLT_EVAL_METHOD</code> has values outside the set {0,1,2}. See section 7.12 of the C99 Standard.

C99 Standard Annex Ref	Behavior to Be Documented	How Polyspace Helps
J.3.12: Library Functions	The base-2 logarithm of the modulus used by the <code>remquo</code> functions in reducing the quotient.	The analysis flags calls to the <code>remquo</code> , <code>remquof</code> and <code>remquo1</code> function.  See section 7.12.10.3 of the C99 Standard.
J.3.12: Library Functions	The termination status returned to the host environment by the <code>abort</code> , <code>exit</code> , or <code>_Exit</code> function.	The analysis flags calls to the <code>abort</code> , <code>exit</code> , or <code>_Exit</code> function.  See sections 7.20.4.1, 7.20.4.3 or 7.20.4.4 of the C99 Standard.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** The implementation

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP11-C, FLP30-C

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017b**

## MISRA C:2012 Dir 2.1

All source files shall compile without any compilation errors

### Description

#### Directive Definition

*All source files shall compile without any compilation errors.*

#### Rationale

A conforming compiler is permitted to produce an object module despite the presence of compilation errors. However, execution of the resulting program can produce unexpected behavior.

#### Polyspace Specification

The software raises a violation of this directive if it finds a compilation error. Because Code Prover is more strict about compilation errors compared to Bug Finder, the coding rules checking in the two products can produce different results for this directive.

#### Message in Report

All source files shall compile without any compilation errors.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Compilation and build

**Category:** Required  
**AGC Category:** Required  
**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 1.1

## **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## **MISRA C:2012 Dir 4.1**

Run-time failures shall be minimized

### **Description**

#### **Directive Definition**

*Run-time failures shall be minimized.*

#### **Rationale**

Some areas to concentrate on are:

- Arithmetic errors
- Pointer arithmetic
- Array bound errors
- Function parameters
- Pointer dereferencing
- Dynamic memory

#### **Polyspace Specification**

This directive is checked through the Polyspace analysis. For more information, see:

- “Defects”.
- “Run-Time Checks” (Polyspace Code Prover).

Polyspace Bug Finder and Polyspace Code Prover check this coding rule differently. The analyses can produce different results.

#### **Message in Report**

Run-time failures shall be minimized.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Code design

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** chrsgnext, diverr, intoflow, inverrno, invfmtstr, ioileave, libptr, nonnullcs, nullref, taintformatio, taintsink, taintstrcpy, usrfmt, xfilepos

## See Also

MISRA C:2012 Dir 4.11 | MISRA C:2012 Rule 1.3 | MISRA C:2012 Rule 18.1 | MISRA C:2012 Rule 18.2 | MISRA C:2012 Rule 18.3

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## Introduced in R2014b

## **MISRA C:2012 Dir 4.3**

Assembly language shall be encapsulated and isolated

### **Description**

#### **Directive Definition**

*Assembly language shall be encapsulated and isolated.*

#### **Rationale**

Encapsulating assembly language is beneficial because:

- It improves readability.
- The name, and documentation, of the encapsulating macro or function makes the intent of the assembly language clear.
- All uses of assembly language for a given purpose can share encapsulation, which improves maintainability.
- You can easily substitute the assembly language for a different target or for purposes of static analysis.

#### **Polyspace Specification**

Polyspace does not raise a warning on assembly language code encapsulated in the following:

- `asm` functions or `asm` pragmas
- Macros

#### **Message in Report**

Assembly language shall be encapsulated and isolated

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Assembly Language Code in C Function

```
enum boolVal {TRUE, FALSE};
enum boolVal isTaskActive;
void taskHandler(void);

void taskHandler(void) {
    isTaskActive = FALSE;
    // Software interrupt for task switching
    asm volatile
    (
        "SWI &02"      /* Service #1: calculate run-time */
    );
    return;
}
```

In this example, the rule violation occurs because the assembly language code is embedded directly in a C function `taskHandler` that contains other C language statements.

One possible correction is to encapsulate the assembly language code in a macro and invoke the macro in the function `taskHandler`.

```
#define RUN_TIME_CALC \
asm volatile \
( \
    "SWI &02"      /* Service #1: calculate run-Time */ \
)\

enum boolVal {TRUE, FALSE};
enum boolVal isTaskActive;
void taskHandler(void);
```

```
void taskHandler(void) {  
    isTaskActive = FALSE;  
    RUN_TIME_CALC;  
    return;  
}
```

## Check Information

**Group:** Code design

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 1.2

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Dir 4.5

Identifiers in the same name space with overlapping visibility should be typographically unambiguous

### Description

#### Directive Definition

*Identifiers in the same name space with overlapping visibility should be typographically unambiguous.*

#### Rationale

What “unambiguous” means depends on the alphabet and language in which source code is written. When you use identifiers that are typographically close, you can confuse between them.

For the Latin alphabet as used in English words, at a minimum, the identifiers should not differ by:

- The interchange of a lowercase letter with its uppercase equivalent.
- The presence or absence of the underscore character.
- The interchange of the letter O and the digit 0.
- The interchange of the letter I and the digit 1.
- The interchange of the letter I and the letter l.
- The interchange of the letter S and the digit 5.
- The interchange of the letter Z and the digit 2.
- The interchange of the letter n and the letter h.
- The interchange of the letter B and the digit 8.
- The interchange of the letters rn and the letter m.

## Message in Report

Identifiers in the same name space with overlapping visibility should be typographically unambiguous.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Typographically Ambiguous Identifiers

```
void func(void) {
    int id1_numval;
    int id1_num_val; /* Non-compliant */

    int id2_numval;
    int id2_numVal; /* Non-compliant */

    int id3_lvalue;
    int id3_lvalue; /* Non-compliant */

    int id4_xyz;
    int id4_xy2; /* Non-compliant */

    int id5_zer0;
    int id5_zer0; /* Non-compliant */

    int id6_rn;
    int id6_m; /* Non-compliant */
}
```

In this example, the rule is violated when identifiers that can be confused for each other are used.

## **Check Information**

**Group:** Code design

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

**CERT C:** DCL02-C

## **See Also**

### **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2015b**

## MISRA C:2012 Dir 4.6

typedefs that indicate size and signedness should be used in place of the basic numerical types

### Description

#### Directive Definition

*typedefs that indicate size and signedness should be used in place of the basic numerical types.*

#### Rationale

When the amount of memory being allocated is important, using specific-length types makes it clear how much storage is being reserved for each object.

#### Polyspace Specification

The rule checker flags use of basic data types in variable or function declarations and definitions. The rule enforces use of typedefs instead.

The rule checker does not flag the use of basic types in the typedef statements themselves.

#### Message in Report

Typedefs that indicate size and signedness should be used in place of the basic numerical types

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Direct Use of Basic Types in Definitions

```
typedef unsigned int uint32_t;  
  
int x = 0;          /* Non compliant */  
uint32_t y = 0;    /* Compliant */
```

In this example, the declaration of x is noncompliant because it uses a basic type directly.

## Check Information

**Group:** Code design

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** INT00-C

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Dir 4.7

If a function returns error information, then that error information shall be tested

### Description

#### Directive Definition

*If a function returns error information, then that error information shall be tested.*

#### Rationale

Typically a function indicates whether an error occurred during execution, via a special return value or by another means.

If a function provides a mechanism to determine errors, before you use the function return value, you must check for such errors.

#### Polyspace Specification

The checking of this directive follows the same specifications as the defect checker Returned value of a sensitive function not checked.

This directive is only partially supported.

#### Message in Report

If a function returns error information, then that error information shall be tested.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Code design

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** ERR00-C, API04-C

**ISO/IEC TS 17961 ID:** inverrno, liberr

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Dir 4.8

If a pointer to a structure or union is never dereferenced within a translation unit, then the implementation of the object should be hidden

### Description

#### Rule Definition

*If a pointer to a structure or union is never dereferenced within a translation unit, then the implementation of the object should be hidden.*

#### Rationale

If a pointer to a structure or union is not dereferenced in a file, the implementation details of the structure or union need not be available in the translation unit for the file. You can hide the implementation details such as structure members and protect them from unintentional changes.

Define an opaque type that can be referenced via pointers but whose contents cannot be accessed.

#### Polyspace Specification

If a pointer to a structure or union is not dereferenced in a file but the structure or union is defined in the file or a header file included in the file, the checker flags a coding rule violation.

#### Message in Report

If a pointer to a structure or union is never dereferenced within a translation unit, then the implementation of the object should be hidden.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Object Implementation Revealed

```
/* file.h */

#ifndef TYPE_GUARD
#define TYPE_GUARD

typedef struct {
    int a;
} myStruct;

#endif

/* file.c */
#include "file.h"

myStruct* getObj(void);
void useObj(myStruct*);

void func() {
    myStruct *sPtr = getObj();
    useObj(sPtr);
}
```

In this example, the pointer to the type `myStruct` is not dereferenced. The pointer is simply obtained from the `getObj` function and passed to the `useObj` function.

The implementation of `myStruct` is visible in the translation unit consisting of `file.c` and `file.h`.

One possible correction is to define an opaque data type in the header file `file.h`. The opaque data type `ptrMyStruct` points to the `myStruct` structure without revealing what the structure contains. The structure `myStruct` itself can be defined in a separate

translation unit, in this case, consisting of the file `file2.c`. The common header file `file.h` must be included in both `file.c` and `file2.c` for linking the structure definition to the opaque type definition.

```
/* file.h */

#ifndef TYPE_GUARD
#define TYPE_GUARD

typedef struct myStruct *ptrMyStruct;

#endif

/* file.c */
#include "file.h"

ptrMyStruct getObj(void);
void useObj(ptrMyStruct);

void func() {
    ptrMyStruct sPtr = getObj();
    useObj(sPtr);
}

/* file2.c */
#include "file.h"

struct myStruct {
    int a;
};
```

## Check Information

**Group:** Code design

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** DCL12-C

## **See Also**

### **Topics**

*“Avoid Violations of MISRA C 2012 Rules 8.x”*  
*“Check for Coding Rule Violations”*  
*“Polyspace MISRA C:2012 Checkers”*  
*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2018a**

## **MISRA C:2012 Dir 4.9**

A function should be used in preference to a function-like macro where they are interchangeable

### **Description**

#### **Directive Definition**

*A function should be used in preference to a function-like macro where they are interchangeable.*

#### **Rationale**

In most circumstances, use functions instead of macros. Functions perform argument type-checking and evaluate their arguments once, avoiding problems with potential multiple side effects.

#### **Polyspace Specification**

Polyspace considers all function-like macro definitions.

#### **Message in Report**

A function should be used in preference to a function-like macro where they are interchangeable

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Code design

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** PRE00-C

## See Also

MISRA C:2012 Rule 13.2 | MISRA C:2012 Rule 20.7

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Dir 4.10

Precautions shall be taken in order to prevent the contents of a header file being included more than once

### Description

#### Directive Definition

*Precautions shall be taken in order to prevent the contents of a header file being included more than once.*

#### Rationale

When a translation unit contains a complex hierarchy of nested header files, it is possible for a particular header file to be included more than once, leading to confusion. If this multiple inclusion produces multiple or conflicting definitions, then your program can have undefined or erroneous behavior.

For instance, suppose that a header file contains:

```
#ifndef _WIN64
    int env_var;
#elseif
    long int env_var;
#endif
```

If the header file is contained in two inclusion paths, one that defines the macro `_WIN64` and another that undefines it, you can have conflicting definitions of `env_var`.

#### Polyspace Specification

If you include a header file whose contents are not guarded from multiple inclusion, the analysis raises a violation of this directive. The violation is shown at the beginning of the header file.

You can guard the contents of a header file from multiple inclusion by using one of the following methods:

```
<start-of-file>
#ifndef <control macro>
#define <control macro>
    /* Contents of file */
#endif
<end-of-file>
```

or

```
<start-of-file>
#ifdef <control macro>
#error ...
#else
#define <control macro>
    /* Contents of file */
#endif
<end-of-file>
```

Unless you use one of these methods, Polyspace flags the header file inclusion as noncompliant.

## Message in Report

Precautions shall be taken in order to prevent the contents of a header file being included more than once.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Code After Macro Guard

```
#ifndef __MY_MACRO__
#define __MY_MACRO__
    void func(void);
```

```
#endif
void func2(void);
```

If a header file contains this code, it is noncompliant because the macro guard does not cover the entire content of the header file. The line `void func2(void)` is outside the guard.

---

**Note** You can have comments outside the macro guard.

---

## Code Before Macro Guard

```
void func(void);
#ifndef __MY_MACRO__
#define __MY_MACRO__
    void func2(void);
#endif
```

If a header file contains this code, it is noncompliant because the macro guard does not cover the entire content of the header file. The line `void func(void)` is outside the guard.

---

**Note** You can have comments outside the macro guard.

---

## Mismatch in Macro Guard

```
#ifndef __MY_MACRO__
#define __MY_MARCO__
    void func(void);
    void func2(void);
#endif
```

If a header file contains this code, it is noncompliant because the macro name in the `#ifndef` statement is different from the name in the following `#define` statement.

## Check Information

**Group:** Code Design

**Category:** Required  
**AGC Category:** Required  
**Language:** C90, C99  
**CERT C:** PRE06-C

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Dir 4.11

The validity of values passed to library functions shall be checked

### Description

#### Directive Definition

*The validity of values passed to library functions shall be checked.*

#### Rationale

Many Standard C functions do not check the validity of parameters passed to them. Even if checks are performed by a compiler, there is no guarantee that the checks are adequate. For example, you should not pass negative numbers to `sqrt` or `log`.

#### Polyspace Specification

Polyspace raises a violation result for library function arguments if the following are all true:

- Argument is a local variable.
- Local variable is not tested between last assignment and call to the library function.
- Corresponding parameter of the library function has a restricted input domain.
- Library function is one of the following common mathematical functions:
  - `sqrt`
  - `tan`
  - `pow`
  - `log`
  - `log10`
  - `fmod`
  - `acos`

- asin
- acos
- atanh
- or atan2

Bug Finder and Code Prover check this rule differently. The analysis can produce different results.

---

**Tip** To mass-justify all results related to the same library function, use the **Detail** column on the **Results List** pane. Click the column header so that all results with the same entry are grouped together. Select the first result and then select the last result while holding the **Shift** key. Assign a status to one of the results. If you do not see the **Detail** column, right-click any other column header and enable this column.

---

## Message in Report

The validity of values passed to library functions shall be checked

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Code design

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** chrsgnext, inverrno, invfmtstr, libptr, nonnullcs, taintformatio, taintsink, taintstrcpy, usrfmt, xfilepos

## See Also

MISRA C:2012 Dir 4.1

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Dir 4.13

Functions which are designed to provide operations on a resource should be called in an appropriate sequence

### Description

#### Directive Definition

*Functions which are designed to provide operations on a resource should be called in an appropriate sequence.*

#### Rationale

You typically use functions operating on a resource in the following way:

- 1 You allocate the resource.

For example, you open a file or critical section.

- 2 You use the resource.

For example, you read from the file or perform operations in the critical section.

- 3 You deallocate the resource.

For example, you close the file or critical section.

For your functions to operate as you expect, perform the steps in sequence. For instance, if you call a resource allocation function on a certain execution path, you must call a deallocation function on that path.

#### Polyspace Specification

Polyspace Bug Finder detects a violation of this rule if you specify multitasking options and your code contains one of these defects:

- **Missing lock:** A task calls an unlock function before calling the corresponding lock function.

- **Missing unlock:** A task calls a lock function but ends without a call to the corresponding unlock function.
- **Double lock:** A task calls a lock function twice without an intermediate call to an unlock function.
- **Double unlock:** A task calls an unlock function twice without an intermediate call to a lock function.

For more information on the multitasking options, see “Multitasking”.

## Message in Report

Functions which are designed to provide operations on a resource should be called in an appropriate sequence.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Multitasking: Lock Function That Is Missing Unlock Function

```
typedef signed int int32_t;
typedef signed short int16_t;

typedef struct tag_mutex_t {
    int32_t value;
} mutex_t;

extern mutex_t mutex_lock ( void );
extern void mutex_unlock ( mutex_t m );

extern int16_t x;
void func(void);

void task1(void) {
    func();
}
```

```

}

void task2(void) {
    func();
}

void func ( void ) {
    mutex_t m = mutex_lock ( ); /* Non-compliant */

    if ( x > 0 ) {
        mutex_unlock ( m );
    } else {
        /* Mutex not unlocked on this path */
    }
}

```

In this example, the rule is violated when:

- You specify that the functions `mutex_lock` and `mutex_unlock` are paired. `mutex_lock` begins a critical section and `mutex_unlock` ends it.
- The function `mutex_lock` is called. However, if  $x \leq 0$ , the function `mutex_unlock` is not called.

To enable detection of this rule violation, you must specify these analysis options.

Option	Specification	
<b>Configure multitasking manually</b>	<input checked="" type="checkbox"/>	
<b>Entry points</b>	task1 task2	
<b>Critical section details</b>	<b>Starting routine</b>	<b>Ending routine</b>
	mutex_lock	mutex_unlock

For more information on the options, see:

- Tasks (-entry-points)
- Critical section details (-critical-section-begin -critical-section-end)

## **Check Information**

**Group:** Code design

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** MEM30-C

## **See Also**

MISRA C:2012 Rule 22.1 | MISRA C:2012 Rule 22.2 | MISRA C:2012 Rule 22.6

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## **MISRA C:2012 Dir 4.14**

The validity of values received from external sources shall be checked

### **Description**

#### **Directive Definition**

*The validity of values received from external sources shall be checked.*

#### **Rationale**

The values originating from external sources can be invalid because of errors or deliberate modification by attackers. Before using the data, you must check the data for validity.

For instance:

- Before using an external input as array index, you must check if it can potentially cause an array bounds error.
- Before using a variable to control a loop, you must check if it can potentially result in an infinite loop.

#### **Message in Report**

The validity of values received from external sources shall be checked.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Validity of External Values Not Checked

```
#include <stdio.h>

void f1(char from_user[])
{
    char input [128];
    (void) sscanf (from_user, "%128c", input);
    (void) sprintf ("%s", input);
}
```

In this example, the `sscanf` statement is noncompliant as there is no check to ensure that the user input is null terminated. The subsequent `sprintf` statement that outputs the string can potentially lead to an array bounds error (buffer overrun).

## Check Information

**Group:** Code design

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP34-C, INT04-C, INT10-C, STR02-C

**ISO/IEC TS 17961 ID:** `diverr`, `nullref`, `taintformatio`, `taintnoproto`, `taintsink`, `taintstrcpy`, `usrfmt`

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

# MISRA C:2012 Rule 1.1

The program shall contain no violations of the standard C syntax and constraints, and shall not exceed the implementation's translation limits

## Description

### Rule Definition

*The program shall contain no violations of the standard C syntax and constraints, and shall not exceed the implementation's translation limits.*

### Polyspace Specification

The rule violation can come from multiple causes. Standard compilation error messages do not lead to a violation of this MISRA rule.

---

**Tip** To mass-justify all results that come from the same cause, use the **Detail** column on the **Results List** pane. Click the column header so that all results with the same entry are grouped together. Select the first result and then select the last result while holding the Shift key. Assign a status to one of the results. If you do not see the **Detail** column, right-click any other column header and enable this column.

---

### Message in Report

- Too many nesting levels of #includes: N1. The limit is N0.

Note: The rule checker considers a brace as an additional level. For instance, the `if` branch in this code is counted as two levels of nesting.

```
if(flag) {  
}
```

The metric `Number of Call Levels` counts this as one level of nesting.

- Integer constant is too large.

- ANSI C does not allow '#XX'.
- Text following preprocessing directive violates ANSI standard.
- Too many macro definitions: N1. The limit is N0.
- Array of zero size should not be used.
- Integer constant does not fit within long int.
- Integer constant does not fit within unsigned long int.
- Too many nesting levels for control flow: N1. The limit is N0.
- Assembly language should not be used.
- Too many enumeration constants: N1. The limit is N0.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Standard C Environment

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 1.2

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

# MISRA C:2012 Rule 1.2

Language extensions should not be used

## Description

### Rule Definition

*Language extensions should not be used.*

### Rationale

If a program uses language extensions, its portability is reduced. Even if you document the language extensions, the documentation might not describe the behavior in all circumstances.

### Polyspace Specification

All the supported extensions lead to a violation of this MISRA rule.

### Message in Report

- ANSI C90 forbids hexadecimal floating-point constants.
- ANSI C90 forbids universal character names.
- ANSI C90 forbids mixed declarations and code.
- ANSI C90/C99 forbids case ranges.
- ANSI C90/C99 forbids local label declaration.
- ANSI C90 forbids mixed declarations and code.
- ANSI C90/C99 forbids typeof operator.
- ANSI C90/C99 forbids casts to union.
- ANSI C90 forbids compound literals.
- ANSI C90/C99 forbids statements and declarations in expressions.

- ANSI C90 forbids `__func__` predefined identifier.
- ANSI C90 forbids keyword `'_Bool'`.
- ANSI C90 forbids 'long long int' type.
- ANSI C90 forbids long long integer constants.
- ANSI C90 forbids 'long double' type.
- ANSI C90/C99 forbids 'short long int' type.
- ANSI C90 forbids `_Pragma` preprocessing operator.
- ANSI C90 does not allow macros with variable arguments list.
- ANSI C90 forbids designated initializer.

Keyword 'inline' should not be used.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Standard C Environment

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** MSC04-C

## See Also

MISRA C:2012 Rule 1.1

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 1.3

There shall be no occurrence of undefined or critical unspecified behaviour

### Description

#### Rule Definition

*There shall be no occurrence of undefined or critical unspecified behaviour.*

#### Message in Report

There shall be no occurrence of undefined or critical unspecified behavior

- 'defined' without an identifier.
- macro 'XX' used with too few arguments.
- macro 'XX' used with too many arguments.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard C Environment

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** accfree, accsig, argcomp, chrsgnext, dblfree, diverr, funcdecl, intoflow, intptrconv, invfmtstr, invptr, ioileave, libmod, libptr, nonnullcs, ptrcomp, ptrobj, resident, restrict, taintsink, uninitref, usrfmt, xfilepos, xfree

## **See Also**

MISRA C:2012 Dir 4.1

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 2.1

A project shall not contain unreachable code

### Description

#### Rule Definition

*A project shall not contain unreachable code.*

#### Rationale

Unless a program exhibits any undefined behavior, unreachable code cannot execute. The unreachable code cannot affect the program output. The presence of unreachable code can indicate an error in the program logic. Unreachable code that the compiler does not remove wastes resources, for example:

- It occupies space in the target machine memory.
- Its presence can cause a compiler to select longer, slower jump instructions when transferring control around the unreachable code.
- Within a loop, it can prevent the entire loop from residing in an instruction cache.

#### Polyspace Specification

Polyspace Bug Finder and Polyspace Code Prover check this coding rule differently. The analyses can produce different results.

The Code Prover run-time check for unreachable code shows more cases than the MISRA checker for rule 2.1. See also `Unreachable code`. The run-time check performs a more exhaustive analysis. In the process, the check can show some instances that are not strictly unreachable code but unreachable only in the context of the analysis. For instance, in the following code, the run-time check shows a potential division by zero in the first line and then removes the zero value of `flag` for the rest of the analysis. Therefore, it considers the `if` block unreachable.

```
val=1.0/flag;  
if(!flag) {}
```

The MISRA checker is designed to prevent these kinds of results.

## Message in Report

A project shall not contain unreachable code.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Code Following return Statement

```
enum light { red, amber, red_amber, green };  
  
enum light next_light ( enum light color )  
{  
    enum light res;  
  
    switch ( color )  
    {  
    case red:  
        res = red_amber;  
        break;  
    case red_amber:  
        res = green;  
        break;  
    case green:  
        res = amber;  
        break;  
    case amber:  
        res = red;  
        break;  
    default:  
    {
```

```
        error_handler ();
        break;
    }
}

res = color;
return res;
res = color;    /* Non-compliant */
}
```

In this example, the rule is violated because there is an unreachable operation following the return statement.

## Check Information

**Group:** Unused Code

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** MSC07-C, MSC12-C

## See Also

MISRA C:2012 Rule 14.3 | MISRA C:2012 Rule 16.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 2.2

There shall be no dead code

### Description

#### Rule Definition

*There shall be no dead code.*

#### Rationale

If an operation is reachable but removing the operation does not affect program behavior, the operation constitutes dead code.

The presence of dead code can indicate an error in the program logic. Because a compiler can remove dead code, its presence can cause confusion for code reviewers.

Operations involving language extensions such as `__asm ( "NOP" );` are not considered dead code.

#### Polyspace Specification

Polyspace Bug Finder detects useless write operations during analysis.

Polyspace Code Prover does not detect useless write operations. For instance, if you assign a value to a local variable but do not read it later, Polyspace Code Prover does not detect this useless assignment. Use Polyspace Bug Finder to detect such useless write operations. For more information, see MISRA C:2012 in Polyspace Bug Finder on page 5-50.

In Code Prover, you can also see a difference in results based on your choice for the option `Verification level (-to)`. See “Check for Coding Rule Violations”.

#### Message in Report

There shall be no dead code.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Redundant Operations

```
extern volatile unsigned int v;
extern char *p;

void f ( void ) {
    unsigned int x;

    ( void ) v;      /* Compliant - Exception*/
    ( int ) v;       /* Non-compliant */
    v >> 3;          /* Non-compliant */

    x = 3;           /* Non-compliant - Detected in Bug Finder only */

    *p++;            /* Non-compliant */
    ( *p )++;        /* Compliant */
}
```

In this example, the rule is violated when an operation is performed on a variable, but the result of that operation is not used. For instance,

- The operations ( int ) and >> on the variable v are redundant because the results are not used.
- The operation = is redundant because the local variable x is not read after the operation.
- The operation \* on p++ is redundant because the result is not used.

The rule is not violated when:

- A variable is cast to void. The cast indicates that you are intentionally not using the value.

- The result of an operation is used. For instance, the operation `*` on `p` is not redundant, because `*p` is incremented.

## Redundant Function Call

```
void g ( void ) {  
    /* Compliant */  
}  
  
void h ( void) {  
    g( ); /* Non-compliant */  
}
```

In this example, `g` is an empty function. Though the function itself does not violate the rule, a call to the function violates the rule.

## Check Information

**Group:** Unused Code

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL22-C, MSC12-C

## See Also

MISRA C:2012 Rule 17.7 | Write without a further read

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 2.3

A project should not contain unused type declarations

### Description

#### Rule Definition

*A project should not contain unused type declarations.*

#### Rationale

If a type is declared but not used, a reviewer does not know if the type is redundant or if it is unused by mistake.

#### Message in Report

A project should not contain unused type declarations: type XX is not used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Unused Local Type

```
signed short unusedType (void){  
    typedef signed short myType;    /* Non-compliant */  
    return 67;  
}
```

```
signed short unusedType (void){  
  
    typedef signed short myType; /* Compliant */  
    myType tempVar = 67;  
    return tempVar;  
  
}
```

In this example, in function `unusedType`, the `typedef` statement defines a new local type `myType`. However, this type is never used in the function. Therefore, the rule is violated.

The rule is not violated in the function `usedType` because the new type `myType` is used.

## Check Information

**Group:** Unused Code

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 2.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 2.4

A project should not contain unused tag declarations

### Description

#### Rule Definition

*A project should not contain unused tag declarations.*

#### Rationale

If a tag is declared but not used, a reviewer does not know if the tag is redundant or if it is unused by mistake.

#### Message in Report

A project should not contain unused tag declarations: tag *tag\_name* is not used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Tag Defined in Function but Not Used

```
void unusedTag ( void )
{
    enum state1 { S_init, S_run, S_sleep };    /* Non-compliant */
}

void usedTag ( void )
```

```
{
    enum state2 { S_init, S_run, S_sleep };    /* Compliant */
    enum state2 my_State = S_init;
}
```

In this example, in the function `unusedTag`, the tag `state1` is defined but not used. Therefore, the rule is violated.

## Tag Used in typedef Only

```
typedef struct record_t    /* Non-compliant */
{
    unsigned short key;
    unsigned short val;
} record1_t;

typedef struct             /* Compliant */
{
    unsigned short key;
    unsigned short val;
} record2_t;

record1_t myRecord1_t;
record2_t myRecord2_t;
```

In this example, the tag `record_t` appears only in the `typedef` of `record1_t`. In the rest of the translation unit, the type `record1_t` is used. Therefore, the rule is violated.

## Check Information

**Group:** Unused Code

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 2.3

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 2.5

A project should not contain unused macro declarations

### Description

#### Rule Definition

*A project should not contain unused macro declarations.*

#### Rationale

If a macro is declared but not used, a reviewer does not know if the macro is redundant or if it is unused by mistake.

#### Message in Report

A project should not contain unused macro declarations: macro *macro\_name* is not used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Unused Macro Definition

```
void use_macro (void)
{
    #define SIZE 4
    #define DATA 3

    use_int16(SIZE);
}
```

In this example, the macro `DATA` is never used in the `use_macro` function.

## Check Information

**Group:** Unused Code

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 2.6

A function should not contain unused label declarations

### Description

#### Rule Definition

*A function should not contain unused label declarations.*

#### Rationale

If you declare a label but do not use it, it is not clear to a reviewer of your code if the label is redundant or unused by mistake.

#### Message in Report

A function should not contain unused label declarations.

Label *label\_name* is not used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Unused Label Declarations

```
void use_var(signed short);  
  
void unused_label ( void )  
{
```

```
    signed short x = 6;

label1:                                /* Non-compliant - label1 not used */
    use_var ( x );
}

void used_label ( void )
{
    signed short x = 6;

    for (int i=0; i < 5; i++) {
        if ( i==2 ) goto label1;
    }

label1:                                /* Compliant - label1 used */
    use_var ( x );
}
```

In this example, the rule is violated when the label `label1` in function `unused_label` is not used.

## Check Information

**Group:** Unused code

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 2.7

There should be no unused parameters in functions

### Description

#### Rule Definition

*There should be no unused parameters in functions.*

#### Rationale

If a parameter is unused, it is possible that the implementation of the function does not match its specifications. This rule can highlight such mismatches.

#### Message in Report

There should be no unused parameters in functions.

Parameter *parameter\_name* is not used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Unused Function Parameters

```
double func(int param1, int* param2) {  
    return (param1/2.0);  
}
```

In this example, the rule is violated because the parameter `param2` is not used.

## **Check Information**

**Group:** Unused code

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## **See Also**

Unused parameter

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 3.1

The character sequences `/*` and `//` shall not be used within a comment

### Description

#### Rule Definition

*The character sequences `/*` and `//` shall not be used within a comment.*

#### Rationale

These character sequences are not allowed in code comments because:

- If your code contains a `/*` or a `//` in a `/* */` comment, it typically means that you have inadvertently commented out code.
- If your code contains a `/*` in a `//` comment, it typically means that you have inadvertently uncommented a `/* */` comment.

#### Polyspace Specification

You cannot annotate this rule in the source code.

For information on annotations, see “Annotate Code and Hide Known or Acceptable Results”.

#### Message in Report

The character sequence `/*` shall not appear within a comment.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### **/\* Used in // Comments**

```

int x;
int y;
int z;

void non_compliant_comments ( void )
{
    x = y //      /* Non-compliant
        + z
        // */
    ;
    z++; //      Compliant with exception: // permitted within a // comment
}

void compliant_comments ( void )
{
    x = y /*      Compliant
        + z
        */
    ;
    z++; //      Compliant with exception: // is permitted within a // comment
}

```

In this example, in the `non_compliant_comments` function, the `/*` character occurs in what appears to be a `//` comment, violating the rule. Because of the comment structure, the operation that takes place is `x = y + z;`. However, without the two `//`-s, an entirely different operation `x=y;` takes place. It is not clear which operation is intended.

Use a comment format that makes your intention clear. For instance, in the `compliant_comments` function, it is clear that the operation `x=y;` is intended.

## Check Information

**Group:** Comments

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** MSC04-C

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 3.2

Line-splicing shall not be used in // comments

### Description

#### Rule Definition

*Line-splicing shall not be used in // comments.*

#### Rationale

Line-splicing occurs when the \ character is immediately followed by a new-line character. Line splicing is used for statements that span multiple lines.

If you use line-splicing in a // comment, the following line can become part of the comment. In most cases, the \ is spurious and can cause unintentional commenting out of code.

#### Message in Report

Line-splicing shall not be used in // comments.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Line Splicing in // Comment

```
#include <stdbool.h>
```

```
extern _Bool b;

void func ( void )
{
    unsigned short x = 0;    // Non-compliant - Line-splicing \
    if ( b )
    {
        ++b;
    }
}
```

Because of line-splicing, the statement `if ( b )` is a part of the previous `//` comment. Therefore, the statement `b++` always executes, making the `if` block redundant.

## Check Information

**Group:** Comments

**Category:** Required

**AGC Category:** Required

**Language:** C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

**Introduced in R2014b**

## MISRA C:2012 Rule 4.1

Octal and hexadecimal escape sequences shall be terminated

### Description

#### Rule Definition

*Octal and hexadecimal escape sequences shall be terminated.*

#### Rationale

There is potential for confusion if an octal or hexadecimal escape sequence is followed by other characters. For example, the character constant '\x1f' consists of a single character, whereas the character constant '\x1g' consists of the two characters '\x1' and 'g'. The manner in which multi-character constants are represented as integers is implementation-defined.

If every octal or hexadecimal escape sequence in a character constant or string literal is terminated, you reduce potential confusion.

#### Message in Report

Octal and hexadecimal escape sequences shall be terminated.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Compliant and Noncompliant Escape Sequences

```
const char *s1 = "\\x41g";      /* Non-compliant */
const char *s2 = "\\x41" "g"; /* Compliant - Terminated by end of literal */
const char *s3 = "\\x41\\x67"; /* Compliant - Terminated by another escape sequence*/

int c1 = '\\141t';             /* Non-compliant */
int c2 = '\\141\\t';          /* Compliant - Terminated by another escape sequence*/
```

In this example, the rule is violated when an escape sequence is not terminated with the end of string literal or another escape sequence.

## Check Information

**Group:** Character Sets and Lexical Conventions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 4.2

Trigraphs should not be used

### Description

#### Rule Definition

*Trigraphs should not be used.*

#### Rationale

You denote trigraphs with two question marks followed by a specific third character (for instance, '??-' represents a '~' (tilde) character and '??)' represents a ']' ). These trigraphs can cause accidental confusion with other uses of two question marks.

---

**Note** Digraphs (<: :>, <% %>, %:, %:%:) are permitted because they are tokens.

---

#### Polyspace Specification

The Polyspace analysis converts trigraphs to the equivalent character for the defect analysis. However, Polyspace also raises a MISRA violation.

The standard requires that trigraphs must be transformed *before* comments are removed during preprocessing. Therefore, Polyspace raises a violation of this rule even if a trigraph appears in code comments.

#### Message in Report

Trigraphs should not be used.

## **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Character Sets and Lexical Conventions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** PRE07-C

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

# MISRA C:2012 Rule 5.1

External identifiers shall be distinct

## Description

### Rule Definition

*External identifiers shall be distinct.*

### Rationale

External identifiers are ones declared with global scope or storage class `extern`.

Polyspace considers two names as distinct if there is a difference between their first 31 characters. If the difference between two names occurs only beyond the first 31 characters, they can be easily mistaken for each other. The readability of the code is reduced. For C90, the difference must occur between the first 6 characters. To use the C90 rules checking, use the value `c90` for the option `C standard version (-c-version)`.

### Message in Report

External %s %s conflicts with the external identifier XX in file YY.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### C90: First Six Characters of Identifiers Not Unique

```
int engine_temperature_raw;  
int engine_temperature_scaled; /* Non-compliant */  
int engin2_temperature; /* Compliant */
```

In this example, the identifier `engine_temperature_scaled` has the same first six characters as a previous identifier, `engine_temperature_raw`.

### C99: First 31 Characters of Identifiers Not Unique

```
int engine_exhaust_gas_temperature_raw;  
int engine_exhaust_gas_temperature_scaled; /* Non-compliant */  
  
int eng_exhaust_gas_temp_raw;  
int eng_exhaust_gas_temp_scaled; /* Compliant */
```

In this example, the identifier `engine_exhaust_gas_temperature_scaled` has the same first 31 characters as a previous identifier, `engine_exhaust_gas_temperature_raw`.

### C90: First Six Characters Identifiers in Different Translation Units Differ in Case Alone

```
/* file1.c */  
int abc = 0;  
  
/* file2.c */  
int ABC = 0; /* Non-compliant */
```

In this example, the implementation supports 6 significant case-insensitive characters in *external identifiers*. The identifiers in the two translation units are different but are not distinct in their significant characters.

## Check Information

**Group:** Identifiers

**Category:** Required  
**AGC Category:** Required  
**Language:** C90, C99  
**CERT C:** DCL23-C, DCL40-C  
**ISO/IEC TS 17961 ID:** funcdecl

## See Also

MISRA C:2012 Rule 5.2 | MISRA C:2012 Rule 5.4 | MISRA C:2012 Rule 5.5

## Topics

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 5.2

Identifiers declared in the same scope and name space shall be distinct

### Description

#### Rule Definition

*Identifiers declared in the same scope and name space shall be distinct.*

#### Rationale

Polyspace considers two names as distinct if there is a difference between their first 63 characters. If the difference between two names occurs only beyond the first 63 characters, they can be easily mistaken for each other. The readability of the code is reduced. For C90, the difference must occur between the first 31 characters. To use the C90 rules checking, use the value `c90` for the option `C standard version (-c-version)`.

#### Message in Report

Identifier XX has same significant characters as identifier YY.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### C90: First 31 Characters of Identifiers Not Unique

```
extern int engine_exhaust_gas_temperature_raw;  
static int engine_exhaust_gas_temperature_scaled;      /* Non-compliant */
```

```

extern double engine_exhaust_gas_temperature_raw;
static double engine_exhaust_gas_temperature2_scaled; /* Compliant */

void func ( void )
{
    /* Not in the same scope */
    int engine_exhaust_gas_temperature_local;          /* Compliant */
}

```

In this example, the identifier `engine_exhaust_gas_temperature_scaled` has the same 31 characters as a previous identifier, `engine_exhaust_gas_temperature_raw`.

The rule does not apply if the two identifiers have the same 31 characters but have different scopes. For instance, `engine_exhaust_gas_temperature_local` has the same 31 characters as `engine_exhaust_gas_temperature_raw` but different scope.

## C99: First 63 Characters of Identifiers Not Unique

```

extern int engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_x_raw;
static int engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_x_scale;
    /* Non-compliant */

extern int engine_gas_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx__raw;
static int engine_gas_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx__scale;
    /* Compliant */

void func ( void )
{
    /* Not in the same scope */
    int engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_x_local;
        /* Compliant */
}

```

In this example, the identifier `engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_x_scale` has the same 63 characters as a previous identifier, `engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_x_raw`.

## **Check Information**

**Group:** Identifiers

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL23-C

## **See Also**

MISRA C:2012 Rule 5.1 | MISRA C:2012 Rule 5.3 | MISRA C:2012 Rule 5.4 |  
MISRA C:2012 Rule 5.5

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 5.3

An identifier declared in an inner scope shall not hide an identifier declared in an outer scope

### Description

#### Rule Definition

*An identifier declared in an inner scope shall not hide an identifier declared in an outer scope.*

#### Rationale

If two identifiers have the same name but different scope, the identifier in the inner scope hides the identifier in the outer scope. All uses of the identifier name refers to the identifier in the inner scope. This behavior forces the developer to keep track of the scope and reduces code readability.

Polyspace considers two names as distinct if there is a difference between their first 63 characters. If the difference between two names occurs only beyond the first 63 characters, they can be easily mistaken for each other. The readability of the code is reduced. For C90, the difference must occur between the first 31 characters. To use the C90 rules checking, use the value `c90` for the option `C standard version (-c-version)`.

#### Message in Report

Variable `XX` hides variable `XX` (FILE line LINE column COLUMN).

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Local Variable Hidden by Another Local Variable in Inner Block

```
typedef signed short int16_t;

void func( void )
{
    int16_t i;
    {
        int16_t i;           /* Non-compliant */
        i = 3;
    }
}
```

In this example, the identifier `i` defined in the inner block in `func` hides the identifier `i` with function scope.

It is not immediately clear to a reader which `i` is referred to in the statement `i=3`.

### Global Variable Hidden by Function Parameter

```
typedef signed short int16_t;

struct astruct
{
    int16_t m;
};

extern void g ( struct astruct *p );
int16_t xyz = 0;

void func ( struct astruct xyz ) /* Non-compliant */
{
    g ( &xyz );
}
```

In this example, the parameter `xyz` of function `func` hides the global variable `xyz`.

It is not immediately clear to a reader which `xyz` is referred to in the statement `g (&xyz)`.

## Check Information

**Group:** Identifiers

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** DCL01-C, DCL23-C

## See Also

MISRA C:2012 Rule 5.2 | MISRA C:2012 Rule 5.8

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 5.4

Macro identifiers shall be distinct

### Description

### Rule Definition

*Macro identifiers shall be distinct.*

### Rationale

The names of macro identifiers must be distinct from both other macro identifiers and their parameters.

Polyspace considers two names as distinct if there is a difference between their first 63 characters. If the difference between two names occurs only beyond the first 63 characters, they can be easily mistaken for each other. The readability of the code is reduced. For C90, the difference must occur between the first 31 characters. To use the C90 rules checking, use the value `c90` for the option `C standard version (-c-version)`.

### Message in Report

- Macro identifiers shall be distinct. Macro `XX` has same significant characters as macro `YY`.
- Macro identifiers shall be distinct. Macro parameter `XX` has same significant characters as macro parameter `YY` in macro `ZZ`.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### C90: First 31 Characters of Macro Names Not Unique

```
#define engine_exhaust_gas_temperature_raw egt_r
#define engine_exhaust_gas_temperature_scaled egt_s /* Non-compliant */

#define engine_exhaust_gas_temp_raw egt_r
#define engine_exhaust_gas_temp_scaled egt_s /* Compliant */
```

In this example, the macro `engine_exhaust_gas_temperature_scaled egt_s` has the same first 31 characters as a previous macro `engine_exhaust_gas_temperature_scaled`.

### C99: First 63 Characters of Macro Names Not Unique

```
#define engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_raw egt_r
#define engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_raw_scaled egt_s
/* Non-compliant */

/* 63 significant case-sensitive characters in macro identifiers */
#define new_engine_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_raw egt_r
#define new_engine_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_scaled egt_s
/* Compliant */
```

In this example, the macro `engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx__gaz_s` scaled has the same first 63 characters as a previous macro `engine_xxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx_xxxxxxxxx__raw`.

## Check Information

**Group:** Identifiers

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL23-C

## **See Also**

MISRA C:2012 Rule 5.1 | MISRA C:2012 Rule 5.2 | MISRA C:2012 Rule 5.5

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2014b**

## MISRA C:2012 Rule 5.5

Identifiers shall be distinct from macro names

### Description

#### Rule Definition

*Identifiers shall be distinct from macro names.*

#### Rationale

The rule requires that macro names that exist only prior to processing must be different from identifier names that also exist after preprocessing. Keeping macro names and identifiers distinct help avoid confusion.

Polyspace considers two names as distinct if there is a difference between their first 63 characters. If the difference between two names occurs only beyond the first 63 characters, they can be easily mistaken for each other. The readability of the code is reduced. For C90, the difference must occur between the first 31 characters. To use the C90 rules checking, use the value `c90` for the option `C standard version (-c-version)`.

#### Message in Report

Identifier XX has same significant characters as macro YY.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Macro Names Same as Identifier Names

```
#define Sum_1(x, y) ( ( x ) + ( y ) )
short Sum_1;                                /* Non-compliant */

#define Sum_2(x, y) ( ( x ) + ( y ) )
short x = Sum_2 ( 1, 2 );                    /* Compliant */
```

In this example, Sum\_1 is both the name of an identifier and a macro. Sum\_2 is used only as a macro.

### C90: First 31 Characters of Macro Name Same as Identifier Name

```
#define          low_pressure_turbine_temperature_1 lp_tb_temp_1
static int low_pressure_turbine_temperature_2;    /* Non-compliant */
```

In this example, the identifier low\_pressure\_turbine\_temperature\_2 has the same first 31 characters as a previous macro low\_pressure\_turbine\_temperature\_1.

## Check Information

**Group:** Identifiers

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL23-C

## See Also

MISRA C:2012 Rule 5.1 | MISRA C:2012 Rule 5.2 | MISRA C:2012 Rule 5.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 5.6

A typedef name shall be a unique identifier

### Description

#### Rule Definition

*A typedef name shall be a unique identifier.*

#### Rationale

Reusing a typedef name as another typedef or as the name of a function, object or enum constant can cause developer confusion.

#### Message in Report

XX conflicts with the typedef name YY.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### typedef Names Reused

```
void func ( void ){
    {
        typedef unsigned char u8_t;
    }
    {
        typedef unsigned char u8_t; /* Non-compliant */
    }
}
```

```

    }
}

typedef float mass;
void func1 ( void ){
    float mass = 0.0f;           /* Non-compliant */
}

```

In this example, the typedef name `u8_t` is used twice. The typedef name `mass` is also used as an identifier name.

## typedef Name Same as Structure Name

```

typedef struct list{           /* Compliant - exception */
    struct list *next;
    unsigned short element;
} list;

typedef struct{
    struct chain{              /* Non-compliant */
        struct chain *list2;
        unsigned short element;
    } s1;
    unsigned short length;
} chain;

```

In this example, the typedef name `list` is the same as the original name of the `struct` type. The rule allows this exceptional case.

However, the typedef name `chain` is not the same as the original name of the `struct` type. The name `chain` is associated with a different `struct` type. Therefore, it clashes with the typedef name.

## Check Information

**Group:** Identifiers

**Category:**

**AGC Category:** Required

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 5.7

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2014b**

## MISRA C:2012 Rule 5.7

A tag name shall be a unique identifier

### Description

#### Rule Definition

*A tag name shall be a unique identifier.*

#### Rationale

Reusing a tag name can cause developer confusion.

#### Message in Report

XX conflicts with the tag name YY.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Identifiers

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

### See Also

MISRA C:2012 Rule 5.6

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 5.8

Identifiers that define objects or functions with external linkage shall be unique

### Description

#### Rule Definition

*Identifiers that define objects or functions with external linkage shall be unique.*

#### Rationale

External identifiers are those declared with global scope or with storage class `extern`. Reusing an external identifier name can cause developer confusion.

Identifiers defined within a function have smaller scope. Even if names of such identifiers are not unique, they are not likely to cause confusion.

#### Message in Report

- Object XX conflicts with the object name YY.
- Function XX conflicts with the function name YY.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Identifiers

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 5.3

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2014b**

## MISRA C:2012 Rule 5.9

Identifiers that define objects or functions with internal linkage should be unique

### Description

#### Rule Definition

*Identifiers that define objects or functions with internal linkage should be unique.*

#### Polyspace Specification

This rule checker assumes that rule 5.8 is not violated.

#### Message in Report

- Object XX conflicts with the object name YY.
- Function XX conflicts with the function name YY.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Identifiers

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

### See Also

MISRA C:2012 Rule 8.10

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

# MISRA C:2012 Rule 6.1

Bit-fields shall only be declared with an appropriate type

## Description

### Rule Definition

*Bit-fields shall only be declared with an appropriate type.*

### Rationale

Using `int` is implementation-defined because bit-fields of type `int` can be either signed or unsigned.

The use of `enum`, `short char`, or any other type of bit-field is not permitted in C90 because the behavior is undefined.

In C99, the implementation can potentially define other integer types that are permitted in bit-field declarations.

### Message in Report

Bit-fields shall only be declared with an appropriate type.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Types

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99  
**CERT C:** INT12-C

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 6.2

Single-bit named bit fields shall not be of a signed type

### Description

#### Rule Definition

*Single-bit named bit fields shall not be of a signed type.*

#### Rationale

According to the C99 Standard Section 6.2.6.2, a single-bit signed bit-field has one sign bit and no value bits. In any representation of integers, zero value bits cannot specify a meaningful value.

A single-bit signed bit-field is therefore unlikely to behave in a useful way. Its presence is likely to indicate programmer confusion.

Although the C90 Standard does not provide much detail regarding the representation of types, the same single-bit bit-field considerations apply.

#### Polyspace Specification

This rule does not apply to unnamed bit fields because their values cannot be accessed.

#### Message in Report

Single-bit named bit fields shall not be of a signed type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Types

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

# MISRA C:2012 Rule 7.1

Octal constants shall not be used

## Description

### Rule Definition

*Octal constants shall not be used.*

### Rationale

Octal constants are denoted by a leading zero. Developers can mistake an octal constant as a decimal constant with a redundant leading zero.

### Polyspace Specification

If you use octal constants in a macro definition, the rule checker flags the issue even if the macro is not used.

### Message in Report

Octal constants shall not be used.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of octal constants

```
#define CST      021
#define VALUE    010          /* Compliant - constant not used */
```

```
#if 010 == 01                /* Non-Compliant - constant used */
#define CST 021              /* Non-Compliant - constant not used */
#endif

extern short code[5];
static char* str2 = "abcd\0efg"; /* Compliant */

void main(void) {
    int value1 = 0;           /* Compliant */
    int value2 = 01;         /* Non-Compliant - decimal 01 */
    int value3 = 1;          /* Compliant */
    int value4 = '\109';     /* Compliant */

    code[1] = 109;           /* Compliant - decimal 109 */
    code[2] = 100;           /* Compliant - decimal 100 */
    code[3] = 052;           /* Non-Compliant - decimal 42 */
    code[4] = 071;           /* Non-Compliant - decimal 57 */

    if (value1 != CST) {     /* Non-Compliant - decimal 17 */
        value1 = !(value1 != 0); /* Compliant */
    }
}
```

In this example, the rule is not violated when octal constants are used to define macros CST and VALUE. The rule is violated only when the macros are used.

## Check Information

**Group:** Literals and Constants

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** DCL18-C

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## **MISRA C:2012 Rule 7.2**

A “u” or “U” suffix shall be applied to all integer constants that are represented in an unsigned type

### **Description**

#### **Rule Definition**

*A “u” or “U” suffix shall be applied to all integer constants that are represented in an unsigned type.*

#### **Rationale**

The signedness of a constant is determined from:

- Value of the constant.
- Base of the constant: octal, decimal or hexadecimal.
- Size of the various types.
- Any suffixes used.

Unless you use a suffix u or U, another developer looking at your code cannot determine easily whether a constant is signed or unsigned.

#### **Message in Report**

A “u” or “U” suffix shall be applied to all integer constants that are represented in an unsigned type.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Literals and Constants

**Category:** Required

**AGC Category:** Readability

**Language:** C90, C99

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 7.3

The lowercase character “l” shall not be used in a literal suffix

### Description

#### Rule Definition

*The lowercase character “l” shall not be used in a literal suffix.*

#### Rationale

The lowercase character “l” can be confused with the digit “1”. Use the uppercase “L” instead.

#### Message in Report

The lowercase character “l” shall not be used in a literal suffix.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Literals and Constants

**Category:** Required

**AGC Category:** Readability

**Language:** C90, C99

**CERT C:** DCL16-C

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## **MISRA C:2012 Rule 7.4**

A string literal shall not be assigned to an object unless the object's type is "pointer to const-qualified char"

### **Description**

#### **Rule Definition**

*A string literal shall not be assigned to an object unless the object's type is "pointer to const-qualified char".*

#### **Rationale**

This rule prevents assignments that allow modification of a string literal.

An attempt to modify a string literal can result in undefined behavior. For example, some implementations can store string literals in read-only memory. An attempt to modify the string literal can result in an exception or crash.

#### **Message in Report**

A string literal shall not be assigned to an object unless the object's type is "pointer to const-qualified char".

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to "Coding Rule Violations Not Displayed".

## Examples

### Incorrect Assignment of String Literal

```
char *str1 = "AccountHolderName";
const char *str2 = "AccountHolderName";

void checkAccount1(char*);           /* Non-Compliant */
void checkAccount2(const char*);    /* Compliant */

void main() {
    checkAccount1("AccountHolderName"); /* Non-Compliant */
    checkAccount2("AccountHolderName"); /* Compliant */
}
```

In this example, the rule is not violated when string literals are assigned to `const char*` pointers, either directly or through copy of function arguments. The rule is violated only when the `const` qualifier is not used.

## Check Information

**Group:** Literals and Constants

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** strmod

## See Also

MISRA C:2012 Rule 11.4 | MISRA C:2012 Rule 11.8

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 8.1

Types shall be explicitly specified

### Description

#### Rule Definition

*Types shall be explicitly specified.*

#### Rationale

In some circumstances, you can omit types from the C90 standard. In those cases, the `int` type is implicitly specified. However, the omission of an explicit type can lead to confusion. For example, in the declaration `extern void foo (char c, const k);`, the type of `k` is `const int`, but you might expect `const char`.

You might be using an implicit type in:

- Object declarations
- Parameter declarations
- Member declarations
- `typedef` declarations
- Function return types

#### Polyspace Specification

The rule checker flags situations where a function parameter or return type is not explicitly specified. To enable checking of this rule, use the value `c90` for the option `C standard version (-c-version)`.

#### Message in Report

Types shall be explicitly specified.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Implicit Types

```
static foo(int a); /* Non compliant */
static void bar(void); /* Compliant */
```

In this example, the rule is violated because the return type of `foo` is implicit.

## Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Required

**Language:** C90

**CERT C:** DCL31-C

## See Also

MISRA C:2012 Rule 8.2

## Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## Introduced in R2014b

## MISRA C:2012 Rule 8.2

Function types shall be in prototype form with named parameters

### Description

### Rule Definition

*Function types shall be in prototype form with named parameters.*

### Rationale

The rule requires that you specify names and data types for all the parameters in a declaration. The parameter names provide useful information regarding the function interface. A mismatch between a declaration and definition can indicate a programming error. For instance, you mixed up parameters when defining the function. By insisting on parameter names, the rule allows a code reviewer to detect this mismatch.

### Polyspace Specification

The rule checker shows a violation if the parameters in a function declaration or definition are missing names or data types.

### Message in Report

- Too many arguments to *function\_name*.
- Too few arguments to *function\_name*.
- Function types shall be in prototype form with named parameters.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Function Prototype Without Named Parameters

```
extern int func(int); /* Non compliant */
extern int func2(int n); /* Compliant */

extern int func3(); /* Non compliant */
extern int func4(void); /* Compliant */
```

In this example, the declarations of `func` and `func3` are noncompliant because the parameters are missing or do not have names.

## Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL07-C, DCL20-C, DCL36-C

**ISO/IEC TS 17961 ID:** argcomp, taintnoproto

## See Also

MISRA C:2012 Rule 8.1 | MISRA C:2012 Rule 8.4 | MISRA C:2012 Rule 17.3

## Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 8.3

All declarations of an object or function shall use the same names and type qualifiers

### Description

#### Rule Definition

*All declarations of an object or function shall use the same names and type qualifiers.*

#### Rationale

Consistently using parameter names and types across declarations of the same object or function encourages stronger typing. It is easier to check that the same function interface is used across all declarations.

#### Polyspace Specification

The rule checker detects situations where parameter names or data types are different between multiple declarations or the declaration and the definition. The checker considers declarations in all translation units and flags issues that are not likely to be detected by a compiler.

Polyspace Bug Finder and Polyspace Code Prover check this coding rule differently. The analyses can produce different results.

#### Message in Report

- Definition of function *function\_name* incompatible with its declaration.
- Global declaration of *function\_name* function has incompatible type with its definition.
- Global declaration of *variable\_name* variable has incompatible type with its definition.
- All declarations of an object or function shall use the same names and type qualifiers.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Mismatch in Parameter Names

```
extern int div (int num, int den);

int div(int den, int num) { /* Non compliant */
    return(num/den);
}
```

In this example, the rule is violated because the parameter names in the declaration and definition are switched.

### Mismatch in Parameter Data Types

```
typedef unsigned short width;
typedef unsigned short height;
typedef unsigned int area;

extern area calculate(width w, height h);

area calculate(width w, width h) { /* Non compliant */
    return w*h;
}
```

In this example, the rule is violated because the second argument of the `calculate` function has data type:

- `height` in the declaration.
- `width` in the definition.

The rule is violated even though the underlying type of `height` and `width` are identical.

## **Check Information**

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL40-C, EXP37-C

**ISO/IEC TS 17961 ID:** argcomp, funcdecl

## **See Also**

MISRA C:2012 Rule 8.4

## **Topics**

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## **Introduced in R2014b**

## MISRA C:2012 Rule 8.4

A compatible declaration shall be visible when an object or function with external linkage is defined

### Description

#### Rule Definition

*A compatible declaration shall be visible when an object or function with external linkage is defined.*

#### Rationale

If a declaration is visible when an object or function is defined, it allows the compiler to check that the declaration and the definition are compatible.

This rule with MISRA C:2012 Rule 8.5 enforces the practice of declaring an object (or function) in a header file and including the header file in source files that define or use the object (or function).

#### Polyspace Specification

The rule checker detects situations where:

- An object or function is defined without a previous declaration.
- There is a data type mismatch between the object or function declaration and definition. Such a mismatch also causes a compilation error.

#### Message in Report

- Global definition of *variable\_name* variable has no previous declaration.
- Function *function\_name* has no visible compatible prototype at definition.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Definition Without Previous Declaration

Header file:

```
/* file.h */
extern int var2;
void func2(void);
```

Source file:

```
/* file.c */
#include "file.h"

int var1 = 0;    /* Non compliant */
int var2 = 0;    /* Compliant */

void func1(void) { /* Non compliant */
}

void func2(void) { /* Compliant */
}
```

In this example, the definitions of `var1` and `func1` are noncompliant because they are not preceded by declarations.

### Mismatch in Parameter Data Types

```
void func(int param1, int param2);

void func(int param1, unsigned int param2) { /* Non compliant */
}
```

In this example, the definition of `func` has a different parameter type from its declaration. The mismatch also causes a compilation error.

## Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** DCL36-C

**ISO/IEC TS 17961 ID:** funcdecl

## See Also

MISRA C:2012 Rule 8.2 | MISRA C:2012 Rule 8.3 | MISRA C:2012 Rule 8.5 |  
MISRA C:2012 Rule 17.3

## Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## Introduced in R2014b

## MISRA C:2012 Rule 8.5

An external object or function shall be declared once in one and only one file

### Description

#### Rule Definition

*An external object or function shall be declared once in one and only one file.*

#### Rationale

If you declare an identifier in a header file, you can include the header file in any translation unit where the identifier is defined or used. In this way, you ensure consistency between:

- The declaration and the definition.
- The declarations in different translation units.

The rule enforces the practice of declaring external objects or functions in header files.

#### Polyspace Specification

The rule checker checks only explicit `extern` declarations (tentative definitions are ignored). The checker flags variables or functions declared `extern` in a non-header file.

Polyspace Bug Finder and Polyspace Code Prover check this coding rule differently. The analyses can produce different results.

#### Message in Report

- Object *object\_name* has external declarations in multiple files.
- Function *function\_name* has external declarations in multiple files.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Extern Declaration in Non-Header File

Header file:

```
/* file.h */
extern int var;
extern void func1(void); /* Compliant */
```

Source file:

```
/* file.c */
#include "file.h"

extern void func2(void); /* Non compliant */

/* Definitions */
int var = 0;
void func1(void) {}
```

In this example, the declaration of external function `func2` is noncompliant because it occurs in a non-header file. The other external object and function declarations occur in a header file and comply with this rule.

## Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 8.4

## **Topics**

*"Avoid Violations of MISRA C 2012 Rules 8.x"*

*"Check for Coding Rule Violations"*

*"Polyspace MISRA C:2012 Checkers"*

*"Software Quality Objective Subsets (C:2012)"*

## **Introduced in R2014b**

## MISRA C:2012 Rule 8.6

An identifier with external linkage shall have exactly one external definition

### Description

#### Rule Definition

*An identifier with external linkage shall have exactly one external definition.*

#### Rationale

If you use an identifier for which multiple definitions exist in different files or no definition exists, the behavior is undefined.

Multiple definitions in different files are not permitted by this rule even if the definitions are the same.

#### Polyspace Specification

The checker flags multiple definitions only if the definitions occur in different files.

The checker does not consider tentative definitions as definitions. For instance, the following code does not violate the rule:

```
int val;  
int val=1;
```

The checker does not show a violation if a function is not defined at all but declared with external linkage and called in the source code.

Polyspace Bug Finder and Polyspace Code Prover check this coding rule differently. The analyses can produce different results.

## Message in Report

- Forbidden multiple definitions for function *function\_name*.
- Forbidden multiple tentative definitions for object *object\_name*.
- Global variable *variable\_name* multiply defined.
- Function *function\_name* multiply defined.
- Global variable has multiple tentative definitions.
- Undefined global variable *variable\_name*.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Variable Multiply Defined

First source file:

```
extern int var = 1;
```

Second source file:

```
int var = 0; /* Non compliant */
```

In this example, the global variable `var` is multiply defined. Unless explicitly specified with the `static` qualifier, the variables have external linkage.

### Function Multiply Defined

Header file:

```
/* file.h */  
int func(int param);
```

First source file:

```
/* file1.c */
#include "file.h"

int func(int param) {
    return param+1;
}
```

Second source file:

```
/* file2.c */
#include "file.h"

int func(int param) { /* Non compliant */
    return param-1;
}
```

In this example, the function `func` is multiply defined. Unless explicitly specified with the `static` qualifier, the functions have external linkage.

## Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

### Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 8.7

Functions and objects should not be defined with external linkage if they are referenced in only one translation unit

### Description

#### Rule Definition

*Functions and objects should not be defined with external linkage if they are referenced in only one translation unit.*

#### Rationale

Compliance with this rule avoids confusion between your identifier and an identical identifier in another translation unit or library. If you restrict or reduce the visibility of an object by giving it internal linkage or no linkage, you or someone else is less likely to access the object inadvertently.

#### Polyspace Specification

The rule checker flags:

- Objects that are defined at file scope without the `static` specifier but used only in one file.
- Functions that are defined without the `static` specifier but called only in one file.

If you intend to use the object or function in one file only, declare it static.

Polyspace Bug Finder and Polyspace Code Prover check this coding rule differently. The analyses can produce different results.

#### Message in Report

- Variable `variable_name` should have internal linkage.

- Function *function\_name* should have internal linkage.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Variable with External Linkage Used in One File

Header file:

```
/* file.h */  
extern int var;
```

First source file:

```
/* file1.c */  
#include "file.h"  
  
int var;    /* Compliant */  
int var2;  /* Non compliant */  
static int var3; /* Compliant */  
  
void reset(void);  
  
void reset(void) {  
    var = 0;  
    var2 = 0;  
    var3 = 0;  
}
```

Second source file:

```
/* file2.c */  
#include "file.h"  
  
void increment(int var2);  
  
void increment(int var2) {
```

```
    var++;  
    var2++;  
}
```

In this example:

- The declaration of `var` is compliant because `var` is declared with external linkage and used in multiple files.
- The declaration of `var2` is noncompliant because `var2` is declared with external linkage but used in one file only.

It might appear that `var2` is defined in both files. However, in the second file, `var2` is a parameter with no linkage and is not the same as the `var2` in the first file.

- The declaration of `var3` is compliant because `var3` is declared with internal linkage (with the `static` specifier) and used in one file only.

## Function with External Linkage Used in One File

Header file:

```
/* file.h */  
extern int var;  
extern void increment1 (void);
```

First source file:

```
/* file1.c */  
#include "file.h"  
  
int var;  
  
void increment2(void);  
static void increment3(void);  
void func(void);  
  
void increment2(void) { /* Non compliant */  
    var+=2;  
}  
  
static void increment3(void) { /* Compliant */  
    var+=3;  
}
```

```
void func(void) {
    increment1();
    increment2();
    increment3();
}
```

Second source file:

```
/* file2.c */
#include "file.h"

void increment1(void) { /* Compliant */
    var++;
}
```

In this example:

- The definition of `increment1` is compliant because `increment1` is defined with external linkage and called in a different file.
- The declaration of `increment2` is noncompliant because `increment2` is defined with external linkage but called in the same file and nowhere else.
- The declaration of `increment3` is compliant because `increment3` is defined with internal linkage (with the `static` specifier) and called in the same file and nowhere else.

## Check Information

**Group:** Declarations and Definitions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** DCL15-C, DCL19-C

## See Also

### Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 8.8

The static storage class specifier shall be used in all declarations of objects and functions that have internal linkage

### Description

#### Rule Definition

*The static storage class specifier shall be used in all declarations of objects and functions that have internal linkage.*

#### Rationale

If you do not use the `static` specifier consistently in all declarations of objects with internal linkage, you might declare the same object with external and internal linkage.

In this situation, the linkage follows the earlier specification that is visible (C99 Standard, Section 6.2.2). For instance, if the earlier specification indicates internal linkage, the object has internal linkage even though the latter specification indicates external linkage. If you notice the latter specification alone, you might expect otherwise.

#### Polyspace Specification

The rule checker detects situations where:

- The same object is declared multiple times with different storage specifiers.
- The same function is declared and defined with different storage specifiers.

#### Message in Report

The static storage class specifier shall be used in all declarations of objects and functions that have internal linkage.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Linkage Conflict Between Variable Declarations

```
static int foo = 0;
extern int foo;      /* Non-compliant */

extern int hhh;
static int hhh;     /* Non-compliant */
```

In this example, the first line defines `foo` with internal linkage. The first line is compliant because the example uses the `static` keyword. The second line does not use `static` in the declaration, so the declaration is noncompliant. By comparison, the third line declares `hhh` with an `extern` keyword creating external linkage. The fourth line declares `hhh` with internal linkage, but this declaration conflicts with the first declaration of `hhh`.

One possible correction is to use `static` and `extern` consistently:

```
static int foo = 0;
static int foo;

extern int hhh;
extern int hhh;
```

### Linkage Conflict Between Function Declaration and Definition

```
static int fee(void); /* Compliant - declaration: internal linkage */
int fee(void){       /* Non-compliant */
    return 1;
}

static int ggg(void); /* Compliant - declaration: internal linkage */
extern int ggg(void){ /* Non-compliant */
    return 1 + x;
}
```

This example shows two internal linkage violations. Because `fee` and `ggg` have internal linkage, you must use a `static` class specifier to be compliant with MISRA.

## Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL15-C, DCL36-C

## See Also

### Topics

"Avoid Violations of MISRA C 2012 Rules 8.x"

"Check for Coding Rule Violations"

"Polyspace MISRA C:2012 Checkers"

"Software Quality Objective Subsets (C:2012)"

**Introduced in R2014b**

## MISRA C:2012 Rule 8.9

An object should be defined at block scope if its identifier only appears in a single function

### Description

#### Rule Definition

*An object should be defined at block scope if its identifier only appears in a single function.*

#### Rationale

If you define an object at block scope, you or someone else is less likely to access the object inadvertently outside the block.

#### Polyspace Specification

The rule checker flags `static` objects that are accessed in one function only but declared at file scope.

#### Message in Report

An object should be defined at block scope if its identifier only appears in a single function.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Object Declared at File Scope but Used in One Function

```
static int ctr; /* Non compliant */

int checkStatus(void);
void incrementCount(void);

void incrementCount(void) {
    ctr=0;
    while(1) {
        if(checkStatus())
            ctr++;
    }
}
```

In this example, the declaration of `ctr` is noncompliant because it is declared at file scope but used only in the function `incrementCount`. Declare `ctr` in the body of `incrementCount` to be MISRA C-compliant.

## Check Information

**Group:** Declarations and Definitions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** DCL19-C

## See Also

### Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 8.10

An inline function shall be declared with the static storage class

### Description

### Rule Definition

*An inline function shall be declared with the static storage class.*

### Rationale

If you call an inline function that is declared with external linkage but not defined in the same translation unit, the function might not be inlined. You might not see the reduction in execution time that you expect from inlining.

If you want to make an inline function available to several translation units, you can still define it with the `static` specifier. In this case, place the definition in a header file. Include the header file in all the files where you want the function inlined.

### Polyspace Specification

The rule checker flags definitions that contain the `inline` specifier without an accompanying `static` specifier.

### Message in Report

An inline function shall be declared with the static storage class.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Inlining Functions with External Linkage

```
inline double mult(int val);
inline double mult(int val) { /* Non compliant */
    return val * 2.0;
}

static inline double div(int val);
static inline double div(int val) { /* Compliant */
    return val / 2.0;
}
```

In this example, the definition of `mult` is noncompliant because it is inlined without the static storage specifier.

## Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Required

**Language:** C99

## See Also

MISRA C:2012 Rule 5.9

## Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 8.11

When an array with external linkage is declared, its size should be explicitly specified

### Description

### Rule Definition

*When an array with external linkage is declared, its size should be explicitly specified.*

### Rationale

Although it is possible to declare an array with an incomplete type and access its elements, it is safer to state the size of the array explicitly. If you provide size information for each declaration, a code reviewer can check multiple declarations for their consistency. With size information, a static analysis tool can perform array bounds analysis without analyzing more than one unit.

### Polyspace Specification

The rule checker flags arrays declared with the `extern` specifier if the declaration does not explicitly specify the array size.

### Message in Report

Size of array *array\_name* should be explicitly stated. When an array with external linkage is declared, its size should be explicitly specified.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Array Declarations

```
extern int32_t array1[10];    /* Compliant */
extern int32_t array2[];     /* Non-compliant */
```

In this example, two arrays are declared `array1` and `array2`. `array1` has external linkage (the `extern` keyword) and a size of 10. `array2` also has external linkage, but no specified size. `array2` is noncompliant because for arrays with external linkage, you must explicitly specify a size.

## Check Information

**Group:** Declarations and Definitions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** ARR02-C

## See Also

### Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 8.12

Within an enumerator list, the value of an implicitly-specified enumeration constant shall be unique

### Description

#### Rule Definition

*Within an enumerator list, the value of an implicitly-specified enumeration constant shall be unique.*

#### Rationale

An implicitly specified enumeration constant has a value one greater than its predecessor. If the first enumeration constant is implicitly specified, then its value is 0. An explicitly specified enumeration constant has the specified value.

If implicitly and explicitly specified constants are mixed within an enumeration list, it is possible for your program to replicate values. Such replications can be unintentional and can cause unexpected behavior.

#### Polyspace Specification

The rule checker flags an enumeration if it has an implicitly specified enumeration constant with the same value as another enumeration constant.

#### Message in Report

The constant *constant1* has same value as the constant *constant2*.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Replication of Value in Implicitly Specified Enum Constants

```
enum color1 {red_1, blue_1, green_1};    /* Compliant */
enum color2 {red_2 = 1, blue_2 = 2, green_2 = 3};    /* Compliant */
enum color3 {red_3 = 1, blue_3, green_3};    /* Compliant */
enum color4 {red_4, blue_4, green_4 = 1};    /* Non Compliant */
enum color5 {red_5 = 2, blue_5, green_5 = 2};    /* Compliant */
enum color6 {red_6 = 2, blue_6, green_6 = 2, yellow_6};    /* Non Compliant */
```

Compliant situations:

- color1: All constants are implicitly specified.
- color2: All constants are explicitly specified.
- color3: Though there is a mix of implicit and explicit specification, all constants have unique values.
- color5: The implicitly specified constants have unique values.

Noncompliant situations:

- color4: The implicitly specified constant blue\_4 has the same value as green\_4.
- color6: The implicitly specified constant blue\_6 has the same value as yellow\_6.

## Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** INT09-C

## See Also

### Topics

“Avoid Violations of MISRA C 2012 Rules 8.x”

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 8.13

A pointer should point to a const-qualified type whenever possible

### Description

#### Rule Definition

*A pointer should point to a const-qualified type whenever possible.*

#### Rationale

This rule ensures that you do not inadvertently use pointers to modify objects.

#### Polyspace Specification

The rule checker flags a pointer to a non-const function parameter if the pointer does not modify the addressed object. The assumption is that the pointer is not meant to modify the object and so must point to a const-qualified type.

#### Message in Report

A pointer should point to a const-qualified type whenever possible.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Pointer That Should Point to const-Qualified Types

```
#include <string.h>
```

```

typedef unsigned short uint16_t;

uint16_t ptr_ex(uint16_t *p) {      /* Non-compliant */
    return *p;
}

char last_char(char * const s){    /* Non-compliant */
    return s[strlen(s) - 1u];
}

uint16_t first(uint16_t a[5]){    /* Non-compliant */
    return a[0];
}

```

This example shows three different noncompliant pointer parameters.

- In the `ptr_ex` function, `p` does not modify an object. However, the type to which `p` points is not `const`-qualified, so it is noncompliant.
- In `last_char`, the pointer `s` is `const`-qualified but the type it points to is not. This parameter is noncompliant because `s` does not modify an object.
- The function `first` does not modify the elements of the array `a`. However, the element type is not `const`-qualified, so `a` is also noncompliant.

One possible correction is to add `const` qualifiers to the definitions.

```

#include <string.h>

typedef unsigned short uint16_t;

uint16_t ptr_ex(const uint16_t *p){ /* Compliant */
    return *p;
}

char last_char(const char * const s){ /* Compliant */
    return s[strlen( s ) - 1u];
}

uint16_t first(const uint16_t a[5]) { /* Compliant */
    return a[0];
}

```

## **Check Information**

**Group:** Declarations and Definitions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** DCL13-C

## **See Also**

### **Topics**

*"Avoid Violations of MISRA C 2012 Rules 8.x"*

*"Check for Coding Rule Violations"*

*"Polyspace MISRA C:2012 Checkers"*

*"Software Quality Objective Subsets (C:2012)"*

**Introduced in R2014b**

## MISRA C:2012 Rule 8.14

The restrict type qualifier shall not be used

### Description

#### Rule Definition

*The restrict type qualifier shall not be used.*

#### Rationale

When you use a `restrict` qualifier carefully, it improves the efficiency of code generated by a compiler. It can also improve static analysis. However, when using the `restrict` qualifier, it is difficult to make sure that the memory areas operated on by two or more pointers do not overlap.

#### Polyspace Specification

The rule checker flags all uses of the `restrict` qualifier.

#### Message in Report

The restrict type qualifier shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of restrict Qualifier

```
void f(int n, int * restrict p, int * restrict q)
{
}
```

In this example, both uses of the restrict qualifier are flagged.

### Check Information

**Group:** Declarations and Definitions

**Category:** Required

**AGC Category:** Advisory

**Language:** C99

**CERT C:** EXP43-C

**ISO/IEC TS 17961 ID:** restrict

### See Also

#### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 9.1

The value of an object with automatic storage duration shall not be read before it has been set

### Description

**Message in Report:**

### Rule Definition

*The value of an object with automatic storage duration shall not be read before it has been set.*

### Rationale

A variable with an automatic storage duration is allocated memory at the beginning of an enclosing code block and deallocated at the end. All non-global variables have this storage duration, except those declared `static` or `extern`.

Variables with automatic storage duration are not automatically initialized and have indeterminate values. Therefore, you must not read such a variable before you have set its value through a write operation.

### Polyspace Specification

The Polyspace analysis checks some of the violations as non-initialized variables. For more information, see `Non-initialized variable`.

Polyspace Bug Finder and Polyspace Code Prover check this coding rule differently. The analyses can produce different results. In Code Prover, you can also see a difference in results based on your choice for the option `Verification level (-to)`. See “Check for Coding Rule Violations”.

## **Message in Report**

The value of an object with automatic storage duration shall not be read before it has been set.

## **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Initialization

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** uninitref

## **See Also**

MISRA C:2012 Rule 15.1 | MISRA C:2012 Rule 15.3

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 9.2

The initializer for an aggregate or union shall be enclosed in braces

### Description

#### Rule Definition

*The initializer for an aggregate or union shall be enclosed in braces.*

#### Rationale

The rule applies to both objects and subobjects. For example, when initializing a structure that contains an array, the values assigned to the structure must be enclosed in braces. Within these braces, the values assigned to the array must be enclosed in another pair of braces.

Enclosing initializers in braces improves clarity of code that contains complex data structures such as multidimensional arrays and arrays of structures.

---

**Tip** To avoid nested braces for subobjects, use the syntax `{0}`, which sets all values to zero.

---

#### Message in Report

The initializer for an aggregate or union shall be enclosed in braces.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Initialization of Two-dimensional Arrays

```
void initialize(void) {
    int x[4][2] = {{0,0},{1,0},{0,1},{1,1}}; /* Compliant */
    int y[4][2] = {{0},{1,0},{0,1},{1,1}}; /* Compliant */
    int z[4][2] = {0}; /* Compliant */
    int w[4][2] = {0,0,1,0,0,1,1,1}; /* Non-compliant */
}
```

In this example, the rule is not violated when:

- Initializers for each row of the array are enclosed in braces.
- The syntax `{0}` initializes all elements to zero.

The rule is violated when a separate pair of braces is not used to enclose the initializers for each row.

## Check Information

**Group:** Initialization

**Category:** Required

**AGC Category:** Readability

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

# MISRA C:2012 Rule 9.3

Arrays shall not be partially initialized

## Description

### Rule Definition

*Arrays shall not be partially initialized.*

### Rationale

Providing an explicit initialization for each array element makes it clear that every element has been considered.

### Message in Report

Arrays shall not be partially initialized.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Partial and Complete Initializations

```
void func(void) {
    int x[3] = {0,1,2};           /* Compliant */
    int y[3] = {0,1};           /* Non-compliant */
    int z[3] = {0};             /* Compliant - exception */
    int a[30] = {[1] = 1,[15]=1}; /* Compliant - exception */
    int b[30] = {[1] = 1, 1};   /* Non-compliant */
}
```

```
    char c[20] = "Hello World";      /* Compliant - exception */  
}
```

In this example, the rule is not violated when each array element is explicitly initialized.

The rule is violated when some elements of the array are implicitly initialized. Exceptions include the following:

- The initializer has the form `{0}`, which initializes all elements to zero.
- The array initializer consists *only* of designated initializers. Typically, you use this approach for sparse initialization.
- The array is initialized using a string literal.

## Check Information

**Group:** Initialization

**Category:** Required

**AGC Category:** Readability

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 9.4

An element of an object shall not be initialized more than once

### Description

#### Rule Definition

*An element of an object shall not be initialized more than once.*

#### Rationale

Designated initializers allow explicitly initializing elements of objects such as arrays in any order. However, using designated initializers, one can inadvertently initialize the same element twice and therefore overwrite the first initialization.

#### Message in Report

An element of an object shall not be initialized more than once.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Array Initialization Using Designated Initializers

```
void func(void) {
    int a[5] = {-2,-1,0,1,2};           /* Compliant */
    int b[5] = {[0]=-2, [1]=-1, [2]=0, [3]=1, [4]=2};
    int c[5] = {[0]=-2, [1]=-1, [1]=0, [3]=1, [4]=2};
}
```

```
                                /* Non-compliant */  
}
```

In this example, the rule is violated when the array element `c[1]` is initialized twice using a designated initializer.

## Structure Initialization Using Designated Initializers

```
struct myStruct {  
    int a;  
    int b;  
    int c;  
    int d;  
};  
  
void func(void) {  
    struct myStruct struct1 = {-4,-2,2,4}; /* Compliant */  
    struct myStruct struct2 = {.a=-4, .b=-2, .c=2, .d=4};  
                                /* Compliant */  
    struct myStruct struct3 = {.a=-4, .b=-2, .b=2, .d=4};  
                                /* Non-compliant */  
}
```

In this example, the rule is violated when `struct3.b` is initialized twice using a designated initializer.

## Check Information

**Group:** Initialization

**Category:** Required

**AGC Category:** Required

**Language:** C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 9.5

Where designated initializers are used to initialize an array object the size of the array shall be specified explicitly

### Description

#### Rule Definition

*Where designated initializers are used to initialize an array object the size of the array shall be specified explicitly.*

#### Rationale

If the size of an array is not specified explicitly, it is determined by the highest index of the elements that are initialized. When using long designated initializers, it might not be immediately apparent which element has the highest index.

#### Message in Report

Where designated initializers are used to initialize an array object the size of the array shall be specified explicitly.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Using Designated Initializers Without Specifying Array Size

```
int a[5] = {[0]= 1, [2] = 1, [4]= 1, [1] = 1};           /* Compliant */  
int b[] = {[0]= 1, [2] = 1, [4]= 1, [1] = 1};           /* Non-compliant */
```

```
int c[] = {[0]= 1, [1] = 1, [2]= 1, [3]=0, [4] = 1}; /* Non-compliant */  
  
void display(int);  
  
void main() {  
    func(a,5);  
    func(b,5);  
    func(c,5);  
}  
  
void func(int* arr, int size) {  
    for(int i=0; i<size; i++)  
        display(arr[i]);  
}
```

In this example, the rule is violated when the arrays b and c are initialized using designated initializers but the array size is not specified.

## Check Information

**Group:** Initialization

**Category:** Required

**AGC Category:** Readability

**Language:** C99

**CERT C:** ARR02-C

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 10.1

Operands shall not be of an inappropriate essential type

### Description

#### Rule Definition

*Operands shall not be of an inappropriate essential type.*

#### Rationale

An essential type category defines the essential type of an object or expression.

Essential type category	Standard types
Essentially Boolean	bool or _Bool (defined in <code>stdbool.h</code> )  If you define a boolean type through a <code>typedef</code> , you must specify this type name before coding rules checking. For more information, see <a href="#">Effective boolean types (-boolean-types)</a> .
Essentially character	char
Essentially enum	named enum
Essentially signed	signed char, signed short, signed int, signed long, signed long long
Essentially unsigned	unsigned char, unsigned short, unsigned int, unsigned long, unsigned long long
Essentially floating	float, double, long double

For operands of some operators, you cannot use certain essential types. In the table below, each row represents an operator/operand combination. If the essential type column is not empty for that row, there is a MISRA restriction when using that type as the operand. The number in the table corresponds to the rationale list after the table.

Operation		Essential type category of arithmetic operand					
Operator	Operand	Boolean	character	enum	signed	unsigned	floating
[ ]	integer	3	4				1
+ (unary)		3	4	5			
- (unary)		3	4	5		8	
+ -	either	3		5			
* /	either	3	4	5			
%	either	3	4	5			1
< > <= >=	either	3					
== !=	either						
! &&	any		2	2	2	2	2
<< >>	left	3	4	5,6	6		1
<< >>	right	3	4	7	7		1
~ &   ^	any	3	4	5,6	6		1
?:	1st		2	2	2	2	2
?:	2nd and 3rd						

- 1** An expression of essentially floating type for these operands is a constraint violation.
- 2** When an operand is interpreted as a Boolean value, use an expression of essentially Boolean type.
- 3** When an operand is interpreted as a numeric value, do not use an operand of essentially Boolean type.
- 4** When an operand is interpreted as a numeric value, do not use an operand of essentially character type. The numeric values of character data are implementation-defined.
- 5** In an arithmetic operation, do not use an operand of essentially enum type. An enum object uses an implementation-defined integer type. An operation involving an enum object can therefore yield a result with an unexpected type.
- 6** Perform only shift and bitwise operations on operands of essentially unsigned type. When you use shift and bitwise operations on essentially signed types, the resulting numeric value is implementation-defined.

- 7 To avoid undefined behavior on negative shifts, use an essentially unsigned right-hand operand.
- 8 For the unary minus operator, do not use an operand of essentially unsigned type. The implemented size of int determines the signedness of the result.

## Message in Report

The *operand\_name* operand of the *operator\_name* operator is of an inappropriate essential type category *category\_name*.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Violation of Rule 10.1, Rationale 2: Inappropriate Operand Types for Operators That Take Essentially Boolean Operands

```
typedef unsigned char boolean;

extern float f32a;
extern char cha;
extern signed char s8a;
extern unsigned char u8a;
enum enuma { a1, a2, a3 } ena;

extern boolean bla, blb, rbla;

void foo(void) {

    rbla = cha && bla;           /* Non-compliant: cha is essentially char */
    enb = ena ? a1 : a2;        /* Non-compliant: ena is essentially enum */
    rbla = s8a && bla;           /* Non-compliant: s8a is essentially signed char */
    ena = u8a ? a1 : a2;        /* Non-compliant: u8a is essentially unsigned char */
    rbla = f32a && bla;          /* Non-compliant: f32a is essentially float */

    rbla = bla && blb;           /* Compliant */
}
```

```

    ru8a = bla ? u8a : u8b;    /* Compliant */
}

```

In the noncompliant examples, rule 10.1 is violated because:

- The operator `&&` expects only essentially Boolean operands. However, at least one of the operands used has a different type.
- The first operand of `?:` is expected to be essentially Boolean. However, a different operand type is used.

---

**Note** For Polyspace to detect the rule violation, you must define the type name `boolean` as an effective Boolean type. For more information, see [Effective boolean types \(-boolean-types\)](#).

---

## Violation of Rule 10.1, Rationale 3: Inappropriate Boolean Operands

```

typedef unsigned char boolean;

enum enuma { a1, a2, a3 } ena;
enum { K1 = 1, K2 = 2 };    /* Essentially signed */
extern char cha, chb;
extern boolean bla, blb, rbla;
extern signed char rs8a, s8a;

void foo(void) {

    rbla = bla * blb;        /* Non-compliant - Boolean used as a numeric value */
    rbla = bla > blb;        /* Non-compliant - Boolean used as a numeric value */

    rbla = bla && blb;        /* Compliant */
    rbla = cha > chb;        /* Compliant */
    rbla = ena > a1;        /* Compliant */
    rbla = u8a > 0U;        /* Compliant */
    rs8a = K1 * s8a;        /* Compliant - K1 obtained from anonymous enum */
}

```

In the noncompliant examples, rule 10.1 is violated because the operators `*` and `>` do not expect essentially Boolean operands. However, the operands used here are essentially Boolean.

---

**Note** For Polyspace to detect the rule violation, you must define the type name `boolean` as an effective Boolean type. For more information, see [Effective boolean types \(-boolean-types\)](#).

---

## Violation of Rule 10.1, Rationale 4: Inappropriate Character Operands

```
extern char rcha, cha, chb;
extern unsigned char ru8a, u8a;

void foo(void) {

    rcha = cha & chb;          /* Non-compliant - char type used as a numeric value */
    rcha = cha << 1;          /* Non-compliant - char type used as a numeric value */

    ru8a = u8a & 2U;         /* Compliant */
    ru8a = u8a << 2U;       /* Compliant */

}
```

In the noncompliant examples, rule 10.1 is violated because the operators `&` and `<<` do not expect essentially character operands. However, at least one of the operands used here has essentially character type.

## Violation of Rule 10.1, Rationale 5: Inappropriate Enum Operands

```
typedef unsigned char boolean;

enum enuma { a1, a2, a3 } rena, ena, enb;

void foo(void) {

    ena--;                    /* Non-Compliant - arithmetic operation with enum type*/
    rena = ena * a1;          /* Non-Compliant - arithmetic operation with enum type*/
    ena += a1;                /* Non-Compliant - arithmetic operation with enum type*/

}
```

```
}

```

In the noncompliant examples, rule 10.1 is violated because the arithmetic operators `--`, `*` and `+=` do not expect essentially enum operands. However, at least one of the operands used here has essentially enum type.

### **Violation of Rule 10.1, Rationale 6: Inappropriate Signed Operand for Bitwise Operations**

```
extern signed char s8a;
extern unsigned char ru8a, u8a;

void foo(void) {

    ru8a = s8a & 2;          /* Non-compliant - bitwise operation on signed type */
    ru8a = 2 << 3U;        /* Non-compliant - shift operation on signed type */

    ru8a = u8a << 2U;      /* Compliant */

}
```

In the noncompliant examples, rule 10.1 is violated because the `&` and `<<` operations must not be performed on essentially signed operands. However, the operands used here are signed.

### **Violation of Rule 10.1, Rationale 7: Inappropriate Signed Right Operand for Shift Operations**

```
extern signed char s8a;
extern unsigned char ru8a, u8a;

void foo(void) {

    ru8a = u8a << s8a;      /* Non-compliant - shift magnitude uses signed type */
    ru8a = u8a << -1;      /* Non-compliant - shift magnitude uses signed type */

    ru8a = u8a << 2U;      /* Compliant */
    ru8a = u8a << 1;      /* Compliant - exception */

}
```

In the noncompliant examples, rule 10.1 is violated because the operation << does not expect an essentially signed right operand. However, the right operands used here are signed.

## **Check Information**

**Group:** The Essential Type Model

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** EXP46-C, INT02-C, INT07-C, INT13-C, INT16-C, INT31-C, STR04-C

## **See Also**

MISRA C:2012 Rule 10.2

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

“Essential Types in MISRA C: 2012 Rules 10.x”

## MISRA C:2012 Rule 10.2

Expressions of essentially character type shall not be used inappropriately in addition and subtraction operations

### Description

#### Rule Definition

*Expressions of essentially character type shall not be used inappropriately in addition and subtraction operations.*

#### Rationale

Essentially character type expressions are `char` variables. Do not use character data arithmetically because the data does not represent numeric values.

#### Message in Report

- The *operand\_name* operand of the `+` operator applied to an expression of essentially character type shall have essentially signed or unsigned type.
- The right operand of the `-` operator applied to an expression of essentially character type shall have essentially signed or unsigned or character type.
- The left operand of the `-` operator shall have essentially character type if the right operand has essentially character type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** The Essential Type Model

**Category:** Required  
**AGC Category:** Advisory  
**Language:** C90, C99  
**CERT C:** STR04-C

## **See Also**

MISRA C:2012 Rule 10.1

## **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”  
“Essential Types in MISRA C: 2012 Rules 10.x”

## MISRA C:2012 Rule 10.3

The value of an expression shall not be assigned to an object with a narrower essential type or of a different essential type category

### Description

#### Rule Definition

*The value of an expression shall not be assigned to an object with a narrower essential type or of a different essential type category.*

#### Rationale

The use of implicit conversions between types can lead to unintended results, including possible loss of value, sign, or precision.

#### Message in Report

- The expression is assigned to an object with a different essential type category.
- The expression is assigned to an object with a narrower essential type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** The Essential Type Model

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** INT02-C, INT07-C, INT31-C, FLP06-C, STR04-C

**ISO/IEC TS 17961 ID:** intoflow

## **See Also**

MISRA C:2012 Rule 10.4 | MISRA C:2012 Rule 10.5 | MISRA C:2012 Rule 10.6

## **Topics**

“Check for Coding Rule Violations”

“Justify Coding Rule Violations Using Code Prover Checks” (Polyspace Code Prover)

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

“Essential Types in MISRA C: 2012 Rules 10.x”

## MISRA C:2012 Rule 10.4

Both operands of an operator in which the usual arithmetic conversions are performed shall have the same essential type category

### Description

#### Rule Definition

*Both operands of an operator in which the usual arithmetic conversions are performed shall have the same essential type category.*

#### Rationale

The use of implicit conversions between types can lead to unintended results, including possible loss of value, sign, or precision.

#### Polyspace Specification

Polyspace does not produce a violation of this rule:

- If one of the operands is the constant zero.
- If one of the operands is a signed constant and the other operand is unsigned, and the signed constant has the same representation as its unsigned equivalent.

For instance, the statement `u8b = u8a + 3;`, where `u8a` and `u8b` are unsigned `char` variables, does not violate the rule because the constants `3` and `3U` have the same representation.

#### Message in Report

Operands of `operator_name` operator shall have the same essential type category.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** The Essential Type Model

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** INT02-C, INT07-C, INT18-C, INT31-C, STR04-C

**ISO/IEC TS 17961 ID:** intoflow

## See Also

MISRA C:2012 Rule 10.3 | MISRA C:2012 Rule 10.7

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

“Essential Types in MISRA C: 2012 Rules 10.x”

## MISRA C:2012 Rule 10.5

The value of an expression should not be cast to an inappropriate essential type

### Description

#### Rule Definition

*The value of an expression should not be cast to an inappropriate essential type.*

#### Rationale

##### Converting Between Variable Types

		From					
		<b>Boolean</b>	<b>character</b>	<b>enum</b>	<b>signed</b>	<b>unsigned</b>	<b>floating</b>
To	<b>Boolean</b>		Avoid	Avoid	Avoid	Avoid	Avoid
	<b>character</b>	Avoid					Avoid
	<b>enum</b>	Avoid	Avoid	Avoid	Avoid	Avoid	Avoid
	<b>signed</b>	Avoid					
	<b>unsigned</b>	Avoid					
	<b>floating</b>	Avoid	Avoid				

Some inappropriate explicit casts are:

- In C99, the result of a cast of assignment to `_Bool` is always 0 or 1. This result is not necessarily the case when casting to another type which is defined as essentially Boolean.
- A cast to an essential enum type may result in a value that does not lie within the set of enumeration constants for that type.
- A cast from essential Boolean to any other type is unlikely to be meaningful.
- Converting between floating and character types is not meaningful as there is no precise mapping between the two representations.

Some acceptable explicit casts are:

- To change the type in which a subsequent arithmetic operation is performed.
- To truncate a value deliberately.
- To make a type conversion explicit in the interests of clarity.

## **Message in Report**

The value of an expression should not be cast to an inappropriate essential type.

## **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** The Essential Type Model

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 10.3 | MISRA C:2012 Rule 10.8

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

“Essential Types in MISRA C: 2012 Rules 10.x”

## MISRA C:2012 Rule 10.6

The value of a composite expression shall not be assigned to an object with wider essential type

### Description

#### Rule Definition

*The value of a composite expression shall not be assigned to an object with wider essential type.*

#### Rationale

A *composite expression* is a nonconstant expression using a composite operator. In the Essential Type Model, composite operators are:

- Multiplicative (\*, /, %)
- Additive (binary +, binary -)
- Bitwise (&, |, ^)
- Shift (<<, >>)
- Conditional (?, :)

If you assign the result of a composite expression to a larger type, the implicit conversion can result in loss of value, sign, precision, or layout.

#### Message in Report

The composite expression is assigned to an object with a wider essential type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** The Essential Type Model

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** INT02-C, INT18-C, INT31-C

## **See Also**

MISRA C:2012 Rule 10.3 | MISRA C:2012 Rule 10.7

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

*“Essential Types in MISRA C: 2012 Rules 10.x”*

## MISRA C:2012 Rule 10.7

If a composite expression is used as one operand of an operator in which the usual arithmetic conversions are performed then the other operand shall not have wider essential type

### Description

#### Rule Definition

*If a composite expression is used as one operand of an operator in which the usual arithmetic conversions are performed, then the other operand shall not have wider essential type.*

#### Rationale

A *composite expression* is a nonconstant expression using a composite operator. In the Essential Type Model, composite operators are:

- Multiplicative (\*, /, %)
- Additive (binary +, binary -)
- Bitwise (&, |, ^)
- Shift (<<, >>)
- Conditional (?, :)

Restricting implicit conversion on composite expressions mean that sequences of arithmetic operations within expressions must use the same essential type. This restriction reduces confusion and avoids loss of value, sign, precision, or layout. However, this rule does not imply that all operands in an expression are of the same essential type.

#### Message in Report

- The right operand shall not have wider essential type than the left operand which is a composite expression.

- The left operand shall not have wider essential type than the right operand which is a composite expression.

## **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** The Essential Type Model

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** INT02-C, INT18-C, INT31-C

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

“Essential Types in MISRA C: 2012 Rules 10.x”

## MISRA C:2012 Rule 10.8

The value of a composite expression shall not be cast to a different essential type category or a wider essential type

### Description

#### Rule Definition

*The value of a composite expression shall not be cast to a different essential type category or a wider essential type.*

#### Rationale

A *composite expression* is a non-constant expression using a composite operator. In the Essential Type Model, composite operators are:

- Multiplicative (\*, /, %)
- Additive (binary +, binary -)
- Bitwise (&, |, ^)
- Shift (<<, >>)
- Conditional (?, :)

Casting to a wider type is not permitted because the result may vary between implementations. Consider this expression:

```
(uint32_t) (u16a +u16b);
```

On a 16-bit machine the addition is performed in 16 bits. The result is wrapped before it is cast to 32 bits. On a 32-bit machine, the addition takes place in 32 bits and preserves high-order bits that are lost on a 16-bit machine. Casting to a narrower type with the same essential type category is acceptable as the explicit truncation of the results always leads to the same loss of information.

For information on essential types, see MISRA C:2012 Rule 10.1.

## Polyspace Specification

The rule checker raises a defect only if the result of a composite expression is cast to a different or wider essential type.

For instance, in this example, a violation is shown in the first assignment to `i` but not the second. In the first assignment, a composite expression `i+1` is directly cast from a signed to an unsigned type. In the second assignment, the composite expression is first cast to the same type and then the result is cast to a different type.

```
typedef int int32_T;
typedef unsigned char uint8_T;
...
...
int32_T i;
i = (uint8_T)(i+1); /* Noncompliant */
i = (uint8_T)((int32_T)(i+1)); /* Compliant */
```

## Message in Report

- The value of a composite expression shall not be cast to a different essential type category.
- The value of a composite expression shall not be cast to a wider essential type.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Casting to Different or Wider Essential Type

```
extern unsigned short ru16a, u16a, u16b;
extern unsigned int u32a, ru32a;
extern signed int s32a, s32b;

void foo(void)
{
```

```
ru16a = (unsigned short) (u32a + u32a);/* Compliant */
ru16a += (unsigned short) s32a; /* Compliant - s32a is not composite */
ru32a = (unsigned int) (u16a + u16b); /* Noncompliant - wider essential type */
}
```

In this example, rule 10.8 is violated in the following cases:

- s32a and s32b are essentially signed variables. However, the result ( s32a + s32b ) is cast to an essentially unsigned type.
- u16a and u16b are essentially unsigned short variables. However, the result ( s32a + s32b ) is cast to a wider essential type, unsigned int.

## Check Information

**Group:** The Essential Type Model

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** INT02-C

**ISO/IEC TS 17961 ID:** ptrcomp

## See Also

MISRA C:2012 Rule 10.5

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 11.1

Conversions shall not be performed between a pointer to a function and any other type

### Description

#### Rule Definition

*Conversions shall not be performed between a pointer to a function and any other type.*

#### Rationale

The rule forbids the following two conversions:

- Conversion from a function pointer to any other type. This conversion causes undefined behavior.
- Conversion from a function pointer to another function pointer, if the function pointers have different argument and return types.

The conversion is forbidden because calling a function through a pointer with incompatible type results in undefined behavior.

#### Polyspace Specification

Polyspace considers both explicit and implicit casts when checking this rule. However, casts from NULL or (void\*)0 do not violate this rule.

#### Message in Report

Conversions shall not be performed between a pointer to a function and any other type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Cast between two function pointers

```
typedef void (*fp16) (short n);
typedef void (*fp32) (int n);

#include <stdlib.h>                                /* To obtain macro NULL */

void func(void) { /* Exception 1 - Can convert a null pointer
                  * constant into a pointer to a function */
    fp16 fp1 = NULL;                               /* Compliant - exception */
    fp16 fp2 = (fp16) fp1;                         /* Compliant */
    fp32 fp3 = (fp32) fp1;                         /* Non-compliant */
    if (fp2 != NULL) {}                           /* Compliant - exception */
    fp16 fp4 = (fp16) 0x8000;                      /* Non-compliant - integer to
                                                  * function pointer */
}
```

In this example, the rule is violated when:

- The pointer fp1 of type fp16 is cast to type fp32. The function pointer types fp16 and fp32 have different argument types.
- An integer is cast to type fp16.

The rule is not violated when function pointers fp1 and fp2 are cast to NULL.

## Check Information

**Group:** Pointer Type Conversions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL07-C, EXP36-C, EXP37-C

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 11.2

Conversions shall not be performed between a pointer to an incomplete type and any other type

### Description

#### Rule Definition

*Conversions shall not be performed between a pointer to an incomplete type and any other type.*

#### Rationale

An incomplete type is a type that does not contain sufficient information to determine its size. For example, the statement `struct s;` describes an incomplete type because the fields of `s` are not defined. The size of a variable of type `s` cannot be determined.

Conversions to or from a pointer to an incomplete type result in undefined behavior. Typically, a pointer to an incomplete type is used to hide the full representation of an object. This encapsulation is broken if another pointer is implicitly or explicitly cast to such a pointer.

#### Message in Report

Conversions shall not be performed between a pointer to an incomplete type and any other type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Casts from incomplete type

```
struct s *sp;
struct t *tp;
short *ip;
struct ct *ctp1;
struct ct *ctp2;

void foo(void) {

    ip = (short *) sp;           /* Non-compliant */
    sp = (struct s *) 1234;     /* Non-compliant */
    tp = (struct t *) sp;      /* Non-compliant */
    ctp1 = (struct ct *) ctp2; /* Compliant */

    /* You can convert a null pointer constant to
     * a pointer to an incomplete type */
    sp = NULL;                  /* Compliant - exception */

    /* A pointer to an incomplete type may be converted into void */
    struct s *f(void);
    (void) f();                 /* Compliant - exception */
}
```

In this example, types `s`, `t` and `ct` are incomplete. The rule is violated when:

- The variable `sp` with an incomplete type is cast to a basic type.
- The variable `sp` with an incomplete type is cast to a different incomplete type `t`.

The rule is not violated when:

- The variable `ctp2` with an incomplete type is cast to the same incomplete type.
- The `NULL` pointer is cast to the variable `sp` with an incomplete type.
- The return value of `f` with incomplete type is cast to `void`.

## Check Information

**Group:** Pointer Type Conversions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP36-C

**ISO/IEC TS 17961 ID:** ptrcomp

## See Also

MISRA C:2012 Rule 11.5

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 11.3

A cast shall not be performed between a pointer to object type and a pointer to a different object type

### Description

#### Rule Definition

*A cast shall not be performed between a pointer to object type and a pointer to a different object type.*

#### Rationale

If a pointer to an object is cast into a pointer to a different object, the resulting pointer can be incorrectly aligned. The incorrect alignment causes undefined behavior.

Even if the conversion produces a pointer that is correctly aligned, the behavior can be undefined if the pointer is used to access an object.

Exception: You can convert a pointer to object type into a pointer to one of the following types:

- char
- signed char
- unsigned char

#### Message in Report

A cast shall not be performed between a pointer to object type and a pointer to a different object type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Noncompliant: Cast to Pointer Pointing to Object of Wider Type

```
signed char *p1;
unsigned int *p2;

void foo(void){
    p2 = ( unsigned int * ) p1;    /* Non-compliant */
}
```

In this example, `p1` can point to a `signed char` object. However, `p1` is cast to a pointer that points to an object of wider type, `unsigned int`.

### Noncompliant: Cast to Pointer Pointing to Object of Narrower Type

```
extern unsigned int read_value ( void );
extern void display ( unsigned int n );

void foo ( void ){
    unsigned int u = read_value ( );
    unsigned short *hi_p = ( unsigned short * ) &u;    /* Non-compliant */
    *hi_p = 0;
    display ( u );
}
```

In this example, `u` is an `unsigned int` variable. `&u` is cast to a pointer that points to an object of narrower type, `unsigned short`.

On a big-endian machine, the statement `*hi_p = 0` attempts to clear the high bits of the memory location that `&u` points to. But, from the result of `display(u)`, you might find that the high bits have not been cleared.

### Compliant: Cast Adding a Type Qualifier

```
const short *p;
const volatile short *q;
void foo (void){
```

```
    q = ( const volatile short * ) p; /* Compliant */  
}
```

In this example, both p and q can point to short objects. The cast between them adds a volatile qualifier only and is therefore compliant.

## Check Information

**Group:** Pointer Type Conversions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP36-C, EXP39-C

**ISO/IEC TS 17961 ID:** alignconv, ptrcomp

## See Also

MISRA C:2012 Rule 11.4 | MISRA C:2012 Rule 11.5 | MISRA C:2012 Rule 11.8

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 11.4

A conversion should not be performed between a pointer to object and an integer type

### Description

### Rule Definition

*A conversion should not be performed between a pointer to object and an integer type.*

### Rationale

Conversion between integers and pointers can cause errors or undefined behavior.

- If an integer is cast to a pointer, the resulting pointer can be incorrectly aligned. The incorrect alignment causes undefined behavior.
- If a pointer is cast to an integer, the resulting value can be outside the allowed range for the integer type.

### Polyspace Specification

Casts or implicit conversions from NULL or (void\*)0 do not generate a warning.

### Message in Report

A conversion should not be performed between a pointer to object and an integer type.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Casts between pointer and integer

```
#include <stdbool.h>

typedef unsigned char    uint8_t;
typedef      char      char_t;
typedef unsigned short  uint16_t;
typedef signed   int    int32_t;

typedef _Bool bool_t;
uint8_t *PORTA = (uint8_t *) 0x0002;    /* Non-compliant */

void foo(void) {

    char_t c = 1;
    char_t *pc = &c;                    /* Compliant */

    uint16_t ui16 = 7U;
    uint16_t *pui16 = &ui16;           /* Compliant */
    pui16 = (uint16_t *) ui16;         /* Non-compliant */

    uint16_t *p;
    int32_t addr = (int32_t) p;         /* Non-compliant */
    bool_t b = (bool_t) p;             /* Non-compliant */
    enum etag { A, B } e = ( enum etag ) p; /* Non-compliant */
}
```

In this example, the rule is violated when:

- The integer 0x0002 is cast to a pointer.

If the integer defines an absolute address, it is more common to assign the address to a pointer in a header file. To avoid the assignment being flagged, you can then exclude headers files from coding rules checking. For more information, see `Do not generate results for (-do-not-generate-results-for)`.

- The pointer p is cast to integer types such as `int32_t`, `bool_t` or `enum etag`.

The rule is not violated when the address `&ui16` is assigned to a pointer.

## Check Information

**Group:** Pointer Type Conversions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** INT36-C

**ISO/IEC TS 17961 ID:** intptrconv

## See Also

MISRA C:2012 Rule 11.3 | MISRA C:2012 Rule 11.7 | MISRA C:2012 Rule 11.9

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## Introduced in R2014b

## MISRA C:2012 Rule 11.5

A conversion should not be performed from pointer to void into pointer to object

### Description

#### Rule Definition

*A conversion should not be performed from pointer to void into pointer to object.*

#### Rationale

If a pointer to void is cast into a pointer to an object, the resulting pointer can be incorrectly aligned. The incorrect alignment causes undefined behavior. However, such a cast can sometimes be necessary, for example, when using memory allocation functions.

#### Polyspace Specification

Casts or implicit conversions from NULL or (void\*)0 do not generate a warning.

#### Message in Report

A conversion should not be performed from pointer to void into pointer to object.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Cast from Pointer to void

```
void foo(void) {
```

```

unsigned int  u32a = 0;
unsigned int  *p32 = &u32a;
void         *p;
unsigned int  *p16;

p   = p32;                /* Compliant - pointer to uint32_t
                          *           into pointer to void */
p16 = p;                  /* Non-compliant */

p   = (void *) p16;       /* Compliant */
p32 = (unsigned int *) p; /* Non-compliant */
}

```

In this example, the rule is violated when the pointer `p` of type `void*` is cast to pointers to other types.

The rule is not violated when `p16` and `p32`, which are pointers to non-void types, are cast to `void*`.

## Check Information

**Group:** Pointer Type Conversions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** EXP36-C

## See Also

MISRA C:2012 Rule 11.2 | MISRA C:2012 Rule 11.3

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 11.6

A cast shall not be performed between pointer to void and an arithmetic type

### Description

#### Rule Definition

*A cast shall not be performed between pointer to void and an arithmetic type.*

#### Rationale

Conversion between integer types and pointers to `void` can cause errors or undefined behavior.

- If an integer type is cast to a pointer, the resulting pointer can be incorrectly aligned. The incorrect alignment causes undefined behavior.
- If a pointer is cast to an arithmetic type, the resulting value can be outside the allowed range for the type.

Conversion between non-integer arithmetic types and pointers to `void` is undefined.

#### Polyspace Specification

Casts or implicit conversions from `NULL` or `(void*)0` do not generate a warning.

#### Message in Report

A cast shall not be performed between pointer to void and an arithmetic type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Casts Between Pointer to void and Arithmetic Types

```
void foo(void) {  
  
    void          *p;  
    unsigned int  u;  
    unsigned short r;  
  
    p = (void *) 0x1234u;          /* Non-compliant - undefined */  
    u = (unsigned int) p;         /* Non-compliant - undefined */  
  
    p = (void *) 0;              /* Compliant - Exception */  
  
}
```

In this example, `p` is a pointer to `void`. The rule is violated when:

- An integer value is cast to `p`.
- `p` is cast to an `unsigned int` type.

The rule is not violated if an integer constant with value 0 is cast to a pointer to `void`.

## Check Information

**Group:** Pointer Type Conversions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 11.7

A cast shall not be performed between pointer to object and a non-integer arithmetic type

### Description

#### Rule Definition

*A cast shall not be performed between pointer to object and a non-integer arithmetic type.*

#### Rationale

This rule covers types that are essentially Boolean, character, enum or floating.

- If an essentially Boolean, character or enum variable is cast to a pointer, the resulting pointer can be incorrectly aligned. The incorrect alignment causes undefined behavior. If a pointer is cast to one of those types, the resulting value can be outside the allowed range for the type.
- Casts to or from a pointer to a floating type results in undefined behavior.

#### Message in Report

A cast shall not be performed between pointer to object and a non-integer arithmetic type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Casts from Pointer to Non-Integer Arithmetic Types

```
int foo(void) {  
  
    short *p;  
    float f;  
    long *l;  
  
    f = (float) p;           /* Non-compliant */  
    p = (short *) f;       /* Non-compliant */  
  
    l = (long *) p;        /* Compliant */  
}
```

In this example, the rule is violated when:

- The pointer `p` is cast to `float`.
- A `float` variable is cast to a pointer to `short`.

The rule is not violated when the pointer `p` is cast to `long*`.

## Check Information

**Group:** Pointer Type Conversions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP36-C

## See Also

MISRA C:2012 Rule 11.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 11.8

A cast shall not remove any `const` or `volatile` qualification from the type pointed to by a pointer

### Description

#### Rule Definition

*A cast shall not remove any `const` or `volatile` qualification from the type pointed to by a pointer.*

#### Rationale

This rule forbids:

- Casts from a pointer to a `const` object to a pointer that does not point to a `const` object.
- Casts from a pointer to a `volatile` object to a pointer that does not point to a `volatile` object.

Such casts violate type qualification. For example, the `const` qualifier indicates the read-only status of an object. If a cast removes the qualifier, the object is no longer read-only.

#### Polyspace Specification

Polyspace flags both implicit and explicit conversions that violate this rule.

#### Message in Report

A cast shall not remove any `const` or `volatile` qualification from the type pointed to by a pointer.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Casts That Remove Qualifiers

```
void foo(void) {
    /* Cast on simple type */
    unsigned short    x;
    unsigned short * const  cpi = &x; /* const pointer */
    unsigned short * const *pcpi; /* pointer to const pointer */
    unsigned short **ppi;
    const unsigned short *pci; /* pointer to const */
    volatile unsigned short *pvi; /* pointer to volatile */
    unsigned short *pi;

    pi = cpi; /* Compliant - no cast required */
    pi = (unsigned short *) pci; /* Non-compliant */
    pi = (unsigned short *) pvi; /* Non-compliant */
    ppi = (unsigned short **)pcpi; /* Non-compliant */
}
```

In this example:

- The variables `pci` and `pcpi` have the `const` qualifier in their type. The rule is violated when the variables are cast to types that do not have the `const` qualifier.
- The variable `pvi` has a `volatile` qualifier in its type. The rule is violated when the variable is cast to a type that does not have the `volatile` qualifier.

Even though `cpi` has a `const` qualifier in its type, the rule is not violated in the statement `p=cpi;`. The assignment does not cause a type conversion because both `p` and `cpi` have type `unsigned short`.

## **Check Information**

**Group:** Pointer Type Conversions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP05-C, EXP32-C

## **See Also**

MISRA C:2012 Rule 11.3

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 11.9

The macro `NULL` shall be the only permitted form of integer null pointer constant

### Description

#### Rule Definition

*The macro `NULL` shall be the only permitted form of integer null pointer constant.*

#### Rationale

The following expressions require the use of a null pointer constant:

- Assignment to a pointer
- The `==` or `!=` operation, where one operand is a pointer
- The `? :` operation, where one of the operands on either side of `:` is a pointer

Using `NULL` rather than `0` makes it clear that a null pointer constant was intended.

#### Message in Report

The macro `NULL` shall be the only permitted form of integer null pointer constant.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Using `0` for Pointer Assignments and Comparisons

```
void main(void) {
```

```
    int *p1 = 0;           /* Non-compliant */
    int *p2 = ( void * ) 0; /* Compliant   */

#define MY_NULL_1 0
#define MY_NULL_2 ( void * ) 0

    if ( p1 == MY_NULL_1 ) /* Non-compliant */
    { }
    if ( p2 == MY_NULL_2 ) /* Compliant   */
    { }

}
```

In this example, the rule is violated when the constant 0 is used instead of (void\*) 0 for pointer assignments and comparisons.

## Check Information

**Group:** Pointer Type Conversions

**Category:** Required

**AGC Category:** Readability

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 11.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

# MISRA C:2012 Rule 12.1

The precedence of operators within expressions should be made explicit

## Description

### Rule Definition

*The precedence of operators within expressions should be made explicit.*

### Rationale

The C language has a large number of operators and their precedence is not intuitive. Inexperienced programmers can easily make mistakes. Remove any ambiguity by using parentheses to explicitly define operator precedence.

The following table list the MISRA C definition of operator precedence for this rule.

Description	Operator and Operand	Precedence
Primary	identifier, constant, string literal, (expression)	16
Postfix	[ ] ( ) (function call) . -> ++(post-increment) --(post-decrement) ( ) { }(C99: compound literals)	15
Unary	++(post-increment) --(post-decrement) & * + - ~ ! sizeof defined (preprocessor)	14
Cast	( )	13
Multiplicative	* / %	12
Additive	+ -	11
Bitwise shift	<< >>	10
Relational	<> <= >=	9
Equality	== !=	8
Bitwise AND	&	7

Description	Operator and Operand	Precedence
Bitwise XOR	^	6
Bitwise OR		5
Logical AND	&&	4
Logical OR		3
Conditional	? :	2
Assignment	= *= /= += -= <<= >>= &= ^=  =	1
Comma	,	0

## Message in Report

Operand of logical %s is not a primary expression. The precedence of operators within expressions should be made explicit.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Ambiguous Precedence in Multi-Operation Expressions

```
int a, b, c, d, x;
```

```
void foo(void) {
    x = sizeof a + b;           /* Non-compliant - MISRA-12.1 */
    x = a == b ? a : a - b;    /* Non-compliant - MISRA-12.1 */
    x = a << b + c ;           /* Non-compliant - MISRA-12.1 */
    if (a || b && c) { }       /* Non-compliant - MISRA-12.1 */
}
```

```

    if ( (a>x) && (b>x) || (c>x) ) { } /* Non-compliant - MISRA-12.1 */
}

```

This example shows various violations of MISRA rule 12.1. In each violation, if you do not know the order of operations, the code could execute unexpectedly.

To comply with this MISRA rule, add parentheses around individual operations in the expressions. One possible solution is shown here.

```

int a, b, c, d, x;

void foo(void) {
    x = sizeof(a) + b;

    x = ( a == b ) ? a : ( a - b );

    x = a << ( b + c );

    if ( ( a || b ) && c ) { }

    if ( ((a>x) && (b>x)) || (c>x) ) { }
}

```

## Ambiguous Precedence In Preprocessing Expressions

```

# if defined X && X + Y > Z    /* Non-compliant - MISRA-12.1 */
# endif

# if ! defined X && defined Y /* Non-compliant - MISRA-12.1 */
# endif

```

In this example, two violations of MISRA rule 12.1 are shown in preprocessing code. In each violation, if you do not know the correct order of operations, the results can be unexpected and cause problems.

To comply with this MISRA rule, add parentheses around individual operations in the expressions. One possible solution is shown here.

```

# if defined (X) && ( (X + Y) > Z )
# endif

```

```
# if ! defined (X) && defined (Y)
# endif
```

## Compliant Expressions Without Parentheses

```
int a, b, c, x;
struct {int a; } s, *ps, *pp[2];

void foo(void) {
    ps = &s

    pp[i]-> a;          /* Compliant - no need to write (pp[i])->a */
    *ps++;              /* Compliant - no need to write *( p++ ) */

    x = f ( a + b, c ); /* Compliant - no need to write f ( (a+b),c) */

    x = a, b;          /* Compliant - parsed as ( x = a ), b */

    if (a && b && c ){ /* Compliant - all operators have
                       * the same precedence */
    }
}
```

In this example, the expressions shown have multiple operations. However, these expressions are compliant because operator precedence is already clear.

## Check Information

**Group:** Expressions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** EXP00-C

## See Also

MISRA C:2012 Rule 12.2 | MISRA C:2012 Rule 12.3 | MISRA C:2012 Rule 12.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 12.2

The right hand operand of a shift operator shall lie in the range zero to one less than the width in bits of the essential type of the left hand operand

### Description

#### Rule Definition

*The right hand operand of a shift operator shall lie in the range zero to one less than the width in bits of the essential type of the left hand operand.*

#### Rationale

Consider the following statement:

```
var = abc << num;
```

If `abc` is a 16-bit integer, then `num` must be in the range 0-15, (nonnegative and less than 16). If `num` is negative or greater than 16, then the shift behavior is undefined.

#### Polyspace Specification

In Polyspace, the numbers that are manipulated in preprocessing directives are 64 bits wide. The valid shift range is between 0 and 63. When bitfields are within a complex expression, Polyspace extends this check onto the bitfield field width or the width of the base type.

#### Message in Report

- Shift amount is bigger than *size*.
- Shift amount is negative.
- The right operand of a shift operator shall lie in the range zero to one less than the width in bits of the essential type of the left operand.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Expressions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 12.1

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 12.3

The comma operator should not be used

### Description

#### Rule Definition

*The comma operator should not be used.*

#### Rationale

The comma operator can be detrimental to readability. You can often write the same code in another form.

#### Message in Report

The comma operator should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Comma Usage in C Code

```
typedef signed int abc, xyz, jkl;
static void func1 ( abc, xyz, jkl );      /* Compliant - case 1 */
int foo(void)
{
```

```

volatile int rd = 1;           /* Compliant - case 2*/
int var=0, foo=0, k=0, n=2, p, t[10]; /* Compliant - case 3*/

int abc = 0, xyz = abc + 1;    /* Compliant - case 4*/
int jkl = ( abc + xyz, abc + xyz ); /* Not compliant - case 1*/

var = 1, foo += var, kkk = 3;   /* Not compliant - case 2*/
var = (kkk = 1, foo = 2);      /* Not compliant - case 3*/

for ( var = 0, ptr = &t[ 0 ]; var < num; ++var, ++ptr){}
/* Not compliant - case 4*/

if ((abc,xyz)<0) { return 1; }  /* Not compliant - case 5*/
}

```

In this example, the code shows various uses of commas in C code.

Case	Reason for noncompliance
1	When reading the code, it is not immediately obvious what jkl is initialized to. For example, you could infer that jkl has a value $abc+xyz$ , $(abc+xyz)*(abc+xyz)$ , $f((abc+xyz), (abc+xyz))$ , and so on.
2	When reading the code, it is not immediately obvious whether foo has a value 0 or 1 after the statement.
3	When reading the code, it is not immediately obvious what value is assigned to var.
4	When reading the code, it is not immediately obvious which values control the for loop.
5	When reading the code, it is not immediately obvious whether the if statement depends on abc, xyz, or both.

Case	Reason for compliance
1	Using commas to call functions with variables is allowed.
2	Comma operator is not used.
3 & 4	When using the comma for initialization, the variables and their values are immediately obvious.

## **Check Information**

**Group:** Expressions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 12.1

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 12.4

Evaluation of constant expressions should not lead to unsigned integer wrap-around

### Description

#### Rule Definition

*Evaluation of constant expressions should not lead to unsigned integer wrap-around.*

#### Rationale

Unsigned integer expressions do not strictly overflow, but instead wraparound. Although there may be good reasons to use modulo arithmetic at run time, intentional use at compile time is less likely.

#### Message in Report

Evaluation of constant expressions should not lead to unsigned integer wrap-around.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

### See Also

MISRA C:2012 Rule 12.1

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 12.5

The `sizeof` operator shall not have an operand which is a function parameter declared as “array of type”

### Description

#### Rule Definition

*The `sizeof` operator shall not have an operand which is a function parameter declared as “array of type”.*

#### Rationale

The `sizeof` operator acting on an array normally returns the array size in bytes. For instance, in the following code, `sizeof(arr)` returns the size of `arr` in bytes.

```
int32_t arr[4];
size_t numberOfElements = sizeof (arr) / sizeof(arr[0]);
```

However, when the array is a function parameter, it degenerates to a pointer. The `sizeof` operator acting on the array returns the corresponding pointer size and not the array size.

The use of `sizeof` operator on an array that is a function parameter typically indicates an unintended programming error.

#### Message in Report

The `sizeof` operator shall not have an operand which is a function parameter declared as “array of type”.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Incorrect Use of sizeof Operator

```
int32_t glbA[] = { 1, 2, 3, 4, 5 };
void f (int32_t A[4])
{
    uint32_t numElements = sizeof(A) / sizeof(int32_t); /* Non-compliant */
    uint32_t numElements_glbA = sizeof(glbA) / sizeof(glbA[0]); /* Compliant */
}
```

In this example, the variable `numElements` always has the same value of 1, irrespective of the number of members that appear to be in the array (4 in this case), because `A` has type `int32_t *` and not `int32_t[4]`.

The variable `numElements_glbA` has the expected value of 5 because the `sizeof` operator acts on the global array `glbA`.

## Check Information

**Group:** Expressions

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**CERT C:** EXP01-C, ARR01-C

**ISO/IEC TS 17961 ID:** `sizeofptr`

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

# MISRA C:2012 Rule 13.1

Initializer lists shall not contain persistent side effects

## Description

### Rule Definition

*Initializer lists shall not contain persistent side effects.*

### Rationale

C99 permits initializer lists with expressions that can be evaluated only at run-time. However, the order in which elements of the list are evaluated is not defined. If one element of the list modifies the value of a variable which is used in another element, the ambiguity in order of evaluation causes undefined values. Therefore, this rule requires that expressions occurring in an initializer list cannot modify the variables used in them.

### Message in Report

Initializer lists shall not contain persistent side effects.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Initializers with Persistent Side Effect

```
volatile int v;  
int x;  
int y;
```

```
void f(void) {
    int arr[2] = {x+y,x-y}; /* Compliant */
    int arr2[2] = {v,0}; /* Non-compliant */
    int arr3[2] = {x++,y}; /* Non-compliant */
}
```

In this example, the rule is not violated in the first initialization because the initializer does not modify either x or y. The rule is violated in the other initializations.

- In the second initialization, because v is volatile, the initializer can modify v.
- In the third initialization, the initializer modifies the variable x.

## Check Information

**Group:** Side Effects

**Category:** Required

**AGC Category:** Required

**Language:** C99

## See Also

MISRA C:2012 Rule 13.2

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 13.2

The value of an expression and its persistent side effects shall be the same under all permitted evaluation orders

### Description

#### Rule Definition

*The value of an expression and its persistent side effects shall be the same under all permitted evaluation orders.*

#### Rationale

If an expression results in different values depending on the order of evaluation, its value becomes implementation-defined.

#### Polyspace Specification

An expression can have different values under the following conditions:

- The same variable is modified more than once in the expression, or is both read and written.
- The expression allows more than one order of evaluation.

Therefore, this rule forbids expressions where a variable is modified more than once and can cause different results under different orders of evaluation.

#### Message in Report

The value of 'XX' depends on the order of evaluation. The value of volatile 'XX' depends on the order of evaluation because of multiple accesses.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Variable Modified More Than Once in Expression

```
int a[10], b[10];
#define COPY_ELEMENT(index) (a[(index)]=b[(index)])

void main () {
    int i=0, k=0;

    COPY_ELEMENT (k);          /* Compliant */
    COPY_ELEMENT (i++);       /* Noncompliant */
}
```

In this example, the rule is violated by the statement `COPY_ELEMENT(i++)` because `i++` occurs twice and the order of evaluation of the two expressions is unspecified.

### Variable Modified and Used in Multiple Function Arguments

```
void f (unsigned int param1, unsigned int param2) {}

void main () {
    unsigned int i=0;
    f ( i++, i );                /* Non-compliant */
}
```

In this example, the rule is violated because it is unspecified whether the operation `i++` occurs before or after the second argument is passed to `f`. The call `f(i++,i)` can translate to either `f(0,0)` or `f(0,1)`.

## Check Information

**Group:** Side Effects

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** PRE31-C, EXP10-C, EXP30-C

## See Also

MISRA C:2012 Dir 4.9 | MISRA C:2012 Rule 13.1 | MISRA C:2012 Rule 13.3 |

MISRA C:2012 Rule 13.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 13.3

A full expression containing an increment (++) or decrement (--) operator should have no other potential side effects other than that caused by the increment or decrement operator

### Description

#### Rule Definition

*A full expression containing an increment (++) or decrement (--) operator should have no other potential side effects other than that caused by the increment or decrement operator.*

#### Rationale

The rule is violated if the following happens in the same line of code:

- The increment or decrement operator acts on a variable.
- Another read or write operation is performed on the variable.

For example, the line `y=x++` violates this rule. The `++` and `=` operator both act on `x`.

Although the operator precedence rules determine the order of evaluation, placing the `++` and another operator in the same line can reduce the readability of the code.

#### Message in Report

A full expression containing an increment (++) or decrement (--) operator should have no other potential side effects other than that caused by the increment or decrement operator.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Increment Operator Used in Expression with Other Side Effects

```

int input(void);
int choice(void);
int operation(int, int);

int func() {
    int x = input(), y = input(), res;
    int ch = choice();
    if (choice == -1)
        return(x++);
    if (choice == 0) {
        res = x++ + y++;
        return(res);          /* Non-compliant */
    }
    else if (choice == 1) {
        x++;                  /* Compliant */
        y++;                  /* Compliant */
        return (x+y);
    }
    else {
        res = operation(x++,y);
        return(res);        /* Non-compliant */
    }
}

```

In this example, the rule is violated when the expressions containing the ++ operator have side effects other than that caused by the operator. For example, in the expression `return(x++)`, the other side-effect is the `return` operation.

## Check Information

**Group:** Side Effects

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 13.2

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2014b**

## MISRA C:2012 Rule 13.4

The result of an assignment operator should not be used

### Description

#### Rule Definition

*The result of an assignment operator should not be used.*

#### Rationale

The rule is violated if the following happens in the same line of code:

- The assignment operator acts on a variable.
- Another read or operation is performed on the result of the assignment.

For example, the line `a[x]=a[x=y];` violates this rule. The `[]` operator acts on the result of the assignment `x=y`.

#### Message in Report

The result of an assignment operator should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Result of Assignment Used

```
int x, y, b, c, d;  
int a[10];
```

```
unsigned int bool_var, false=0, true=1;

int foo(void) {
    x = y;          /* Compliant - x is not used */
    a[x] = a[x = y]; /* Non-compliant - Value of x=y is used */
    if ( bool_var = false ) {}
                    /* Non-compliant - bool_var=false is used */
    if ( bool_var == false ) {} /* Compliant */
    if ( ( 0u == 0u ) || ( bool_var = true ) ) {}
    /* Non-compliant - even though (bool_var=true) is not evaluated */
    if ( ( x = f ( ) ) != 0 ) {}
                    /* Non-compliant - value of x=f() is used */
    a[b += c] = a[b];
                    /* Non-compliant - value of b += c is used */
    b = c = d = 0; /* Non-compliant - value of d=0 and c=d=0 are used */
}
```

In this example, the rule is violated when the result of an assignment is used.

## Check Information

**Group:** Side Effects

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** boolasgn

## See Also

MISRA C:2012 Rule 13.2

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 13.5

The right hand operand of a logical `&&` or `||` operator shall not contain persistent side effects

### Description

#### Rule Definition

*The right hand operand of a logical `&&` or `||` operator shall not contain persistent side effects.*

#### Rationale

The right operand of an `||` operator is not evaluated if the left operand is true. The right operand of an `&&` operator is not evaluated if the left operand is false. In these cases, if the right operand modifies the value of a variable, the modification does not take place. Following the operation, if you expect a modified value of the variable, the modification might not always happen.

#### Polyspace Specification

- For this rule, Polyspace considers that all function calls have a persistent side effect.

If a pure function is flagged, before ignoring this rule violation, make sure that the function has no side effects. For instance, floating-point functions such as `abs()` seem to only return a value and have no other side effect. However, these functions make use of the FPU Register Stack and can have side-effects in certain architectures, for instance, certain Intel® architectures.

- If the right operand is a volatile variable, Polyspace does not flag this as a rule violation.

#### Message in Report

The right hand operand of a `&&` operator shall not contain side effects. The right hand operand of a `||` operator shall not contain side effects.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Right Operand of Logical Operator with Persistent Side Effects

```
int check (int arg) {
    static int count;
    if(arg > 0) {
        count++;
        return 1;
    }
    else
        return 0;
}

int getSwitch(void);
int getVal(void);

void main(void) {
    int val = getVal();
    int mySwitch = getSwitch();
    int checkResult;

    if(mySwitch && check(val)) { /* Non-compliant */
    }

    checkResult = check(val);
    if(checkResult && mySwitch) { /* Compliant */
    }

    if(check(val) && mySwitch) { /* Compliant */
    }
}
```

In this example, the rule is violated when the right operand of the && operation contains a function call. The function call has a persistent side effect because the static variable `count` is modified in the function body. Depending on `mySwitch`, this modification might or might not happen.

The rule is not violated when the left operand contains a function call. Alternatively, to avoid the rule violation, assign the result of the function call to a variable. Use this variable in the logical operation in place of the function call.

In this example, the function call has the side effect of modifying a `static` variable. Polyspace flags all function calls when used on the right-hand side of a logical `&&` or `||` operator, even when the function does not have a side effect. Manually inspect your function body to see if it has side effects. If the function does not have side effects, add a comment and justification in your Polyspace result explaining why you retained your code.

## Check Information

**Group:** Side Effects

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 13.6

The operand of the `sizeof` operator shall not contain any expression which has potential side effects

### Description

#### Rule Definition

*The operand of the `sizeof` operator shall not contain any expression which has potential side effects.*

#### Rationale

The argument of a `sizeof` operator is usually not evaluated at run time. If the argument is an expression, you might wrongly expect that the expression is evaluated.

#### Polyspace Specification

The rule is not violated if the argument is a `volatile` variable.

#### Message in Report

The operand of the `sizeof` operator shall not contain any expression which has potential side effects.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Expressions in sizeof Operator

```
#include <stddef.h>
int x;
int y[40];
struct S {
    int a;
    int b;
};
struct S myStruct;

void main() {
    size_t sizeOfType;
    sizeOfType = sizeof(x);           /* Compliant */
    sizeOfType = sizeof(y);           /* Compliant */
    sizeOfType = sizeof(myStruct);    /* Compliant */
    sizeOfType = sizeof(x++);         /* Non-compliant */
}
```

In this example, the rule is violated when the expression `x++` is used as argument of `sizeof` operator.

## Check Information

**Group:** Side Effects

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**CERT C:** EXP44-C

## See Also

MISRA C:2012 Rule 18.8

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 14.1

A loop counter shall not have essentially floating type

### Description

#### Rule Definition

*A loop counter shall not have essentially floating type.*

#### Rationale

When using a floating-point loop counter, accumulation of rounding errors can result in a mismatch between the expected and actual number of iterations. This rounding error can happen when a loop step that is not a power of the floating point radix is rounded to a value that can be represented by a float.

Even if a loop with a floating-point loop counter appears to behave correctly on one implementation, it can give a different number of iteration on another implementation.

#### Polyspace Specification

If the for index is a variable symbol, Polyspace checks that it is not a float.

#### Message in Report

A loop counter shall not have essentially floating type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### for Loop Counters

```
int main(void){
    unsigned int counter = 0u;
    int result = 0;
    float foo;

    // Float loop counters
    for(float foo = 0.0f; foo < 1.0f; foo +=0.001f){
        /* Non-compliant - counter = 1000 at the end of the loop */
        ++counter;
    }

    float fff = 0.0f;
    for(fff = 0.0f; fff <12.0f; fff += 1.0f){ /* Non-compliant*/
        result++;
    }

    // Integer loop count
    for(unsigned int count = 0u; count < 1000u; ++count){ /* Compliant */
        foo = (float) count * 0.001f;
    }
}
```

In this example, the three for loops show three different loop counters. The first and second for loops use float variables as loop counters, and therefore are not compliant. The third loop uses the integer count as the loop counter. Even though count is used as a float inside the loop, the variable remains an integer when acting as the loop index. Therefore, this for loop is compliant.

### while Loop Counters

```
int main(void){
    unsigned int u32a;
    float foo;

    foo = 0.0f;
    while (foo < 1.0f){
        foo += 0.001f; /* Non-compliant - foo used as a loop counter */
    }
}
```

```
foo = read_float32();
do{
    u32a = read_u32();
}while( ((float)u32a - foo) > 10.0f );
/* Compliant - foo doesn't change in the loop */
/* so cannot be a counter */
return 1;
}
```

This example shows two `while` loops both of which use `foo` in the `while`-loop conditions.

The first `while` loop uses `foo` in the condition and inside the loop. Because `foo` changes, floating-point rounding errors can cause unexpected behavior.

The second `while` loop does not use `foo` inside the loop, but does use `foo` inside the `while`-condition. So `foo` is not the loop counter. The integer `u32a` is the loop counter because it changes inside the loop and is part of the `while` condition. Because `u32a` is an integer, the rounding error issue is not a concern, making this `while` loop compliant.

## Check Information

**Group:** Control Statement Expressions

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** FLP30-C

## See Also

MISRA C:2012 Rule 14.2

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 14.2

A for loop shall be well-formed

### Description

#### Rule Definition

*A for loop shall be well-formed.*

#### Rationale

The `for` statement provides a general-purpose looping facility. Using a restricted form of loop makes code easier to review and to analyze.

#### Polyspace Specification

Polyspace checks that:

- The `for` loop index (*V*) is a variable symbol.
- *V* is the last assigned variable in the first expression (if present).
- If the first expression exists, it contains an assignment of *V*.
- If the second expression exists, it is a comparison of *V*.
- If the third expression exists, it is an assignment of *V*.
- There are no direct assignments of the `for` loop index.

#### Message in Report

- 1st expression should be an assignment. The following kinds of for loops are allowed:
  - all three expressions shall be present;
  - the 2nd and 3rd expressions shall be present with prior initialization of the loop counter;

- all three expressions shall be empty for a deliberate infinite loop.
- 3rd expression should be an assignment of a loop counter.
- 3rd expression : assigned variable should be the loop counter (*counter*).
- 3rd expression should be an assignment of loop counter (*counter*) only.
- 2nd expression should contain a comparison with loop counter (*counter*).
- Loop counter (*counter*) should not be modified in the body of the loop.
- Bad type for loop counter (*counter*).

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Altering the Loop Counter Inside the Loop

```
void foo(void){  
    for(short index=0; index < 5; index++){ /* Non-compliant */  
        index = index + 3; /* Altering the loop counter */  
    }  
}
```

In this example, the loop counter `index` changes inside the `for` loop. It is hard to determine when the loop terminates.

One possible correction is to use an extra flag to terminate the loop early.

In this correction, the second clause of the `for` loop depends on the counter value, `index < 5`, and upon an additional flag, `!flag`. With the additional flag, the `for` loop definition and counter remain readable, and you can escape the loop early.

```
#define FALSE 0  
#define TRUE 1  
  
void foo(void){
```

```

int flag = FALSE;

for(short index=0; (index < 5) && !flag; index++){ /* Compliant */
    if((index % 4) == 0){
        flag = TRUE;        /* allows early termination of loop */
    }
}

```

## for Loops With Empty Clauses

```

void foo(void)
    for(short index = 0; ; index++) {} /* Non-compliant */

    for(short index = 0; index < 10;) {} /* Non-compliant */

    short index;
    for(; index < 10;) {} /* Non-compliant */

    for(; index < 10; i++) {} /* Compliant */

    for(;;){}
        /* Compliant - Exception all three clauses can be empty */
}

```

This example shows `for` loops definitions with a variety of missing clauses. To be compliant, initialize the first clause variable before the `for` loop (line 9). However, you cannot have a `for` loop without the second or third clause.

The one exception is a `for` loop with all three clauses empty, so as to allow for infinite loops.

## Check Information

**Group:** Control Statement Expressions

**Category:** Required

**AGC Category:** Readability

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 14.1 | MISRA C:2012 Rule 14.3 | MISRA C:2012 Rule 14.4

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

## MISRA C:2012 Rule 14.3

Controlling expressions shall not be invariant

### Description

#### Rule Definition

*Controlling expressions shall not be invariant.*

#### Rationale

If the controlling expression, for example an `if` condition, has a constant value, the non-changing value can point to a programming error.

#### Polyspace Specification

Polyspace Bug Finder and Polyspace Code Prover check this coding rule differently. The analyses can produce different results.

Polyspace Bug Finder flags some violations of MISRA C 14.3 through the `Dead code` and `Useless if` checkers.

Polyspace Code Prover does not use gray code to flag MISRA C 14.3 violations. In Code Prover, you can also see a difference in results based on your choice for the option `Verification level (-to)`. See “Check for Coding Rule Violations”.

#### Message in Report

- Boolean operations whose results are invariant shall not be permitted.
- Expression is always true.
- Boolean operations whose results are invariant shall not be permitted.
- Expression is always false.
- Controlling expressions shall not be invariant.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Control Statement Expressions

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 2.1 | MISRA C:2012 Rule 14.2

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 14.4

The controlling expression of an if statement and the controlling expression of an iteration-statement shall have essentially Boolean type

### Description

#### Rule Definition

*The controlling expression of an if statement and the controlling expression of an iteration-statement shall have essentially Boolean type*

#### Rationale

Strong typing requires the controlling expression on an `if` statement or iteration statement to have *essentially Boolean* type.

#### Polyspace Specification

Polyspace does not flag integer constants, for example `if(2)`.

If your configuration includes the option `-boolean-types`, the number of warnings can increase or decrease.

#### Message in Report

The controlling expression of an if statement and the controlling expression of an iteration-statement shall have essentially Boolean type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Controlling Expression in `if`, `while`, and `for`

```
#include <stdbool.h>
#include <stdlib.h>

#define TRUE = 1

typedef _Bool bool_t;
extern bool_t flag;

void foo(void){
    int *p = 1;
    int *q = 0;
    int i = 0;
    while(p){}          /* Non-compliant - p is a pointer */

    while(q != NULL){} /* Compliant */

    while(TRUE){}      /* Compliant */

    while(flag){}      /* Compliant */

    if(i){}             /* Non-compliant - int32_t is not boolean */

    if(i != 0){}       /* Compliant */

    for(int i=-10; i;i++){} /* Non-compliant - int32_t is not boolean */

    for(int i=0; i<10;i++){} /* Compliant */
}
```

This example shows various controlling expressions in `while`, `if`, and `for` statements.

The noncompliant statements (the first `while`, `if`, and `for` examples), use a single non-Boolean variable. If you use a single variable as the controlling statement, it must be essentially Boolean (lines 17 and 19). Boolean expressions are also compliant with MISRA.

## Check Information

**Group:** Control Statement Expressions

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 14.2 | MISRA C:2012 Rule 20.8

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 15.1

The goto statement should not be used

### Description

#### Rule Definition

*The goto statement should not be used.*

#### Rationale

Unrestricted use of goto statements makes the program unstructured and difficult to understand.

#### Message in Report

The goto statement should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of goto Statements

```
void foo(void) {
    int i = 0, result = 0;

label1:
    for ( i; i < 5; i++ ) {
        if (i > 2) goto label2;        /* Non-compliant */
    }
}
```

```
    }  
label2: {  
    result++;  
    goto label1;           /* Non-compliant */  
    }  
}
```

In this example, the rule is violated when `goto` statements are used.

## Check Information

**Group:** Control Flow

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 15.2 | MISRA C:2012 Rule 15.3 | MISRA C:2012 Rule 15.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## Introduced in R2014b

## MISRA C:2012 Rule 15.2

The goto statement shall jump to a label declared later in the same function

### Description

#### Rule Definition

*The goto statement shall jump to a label declared later in the same function.*

#### Rationale

Unrestricted use of goto statements makes the program unstructured and difficult to understand. You can use a forward goto statement together with a backward one to implement iterations. Restricting backward goto statements ensures that you use only iteration statements provided by the language such as for or while to implement iterations. This restriction reduces visual complexity of the code.

#### Message in Report

The goto statement shall jump to a label declared later in the same function.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of Backward goto Statements

```
void foo(void) {  
    int i = 0, result = 0;
```

```
label1:
    for ( i; i < 5; i++ ) {
        if (i > 2) goto label2;    /* Compliant */
    }

label2: {
    result++;
    goto label1;                  /* Non-compliant */
}
}
```

In this example, the rule is violated when a `goto` statement causes a backward jump to `label1`.

The rule is not violated when a `goto` statement causes a forward jump to `label2`.

## Check Information

**Group:** Control Flow

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 15.1 | MISRA C:2012 Rule 15.3 | MISRA C:2012 Rule 15.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 15.3

Any label referenced by a goto statement shall be declared in the same block, or in any block enclosing the goto statement

### Description

#### Rule Definition

*Any label referenced by a goto statement shall be declared in the same block, or in any block enclosing the goto statement.*

#### Rationale

Unrestricted use of goto statements makes the program unstructured and difficult to understand. Restricting use of goto statements to jump between blocks or into nested blocks reduces visual code complexity.

#### Message in Report

Any label referenced by a goto statement shall be declared in the same block, or in any block enclosing the goto statement.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### goto Statements Jump Inside Block

```
void f1(int a) {  
    if(a <= 0) {
```

```

    goto L2;          /* Non-compliant - L2 in different block*/
}

goto L1;            /* Compliant - L1 in same block*/

if(a == 0) {
    goto L1;        /* Compliant - L1 in outer block*/
}

goto L2;            /* Non-compliant - L2 in inner block*/

L1: if(a > 0) {
    L2;;
}
}

```

In this example, `goto` statements cause jumps to different labels. The rule is violated when:

- The label occurs in a block different from the block containing the `goto` statement.  
The block containing the label neither encloses nor is enclosed by the current block.
- The label occurs in a block enclosed by the block containing the `goto` statement.

The rule is not violated when:

- The label occurs in the same block as the block containing the `goto` statement..
- The label occurs in a block that encloses the block containing the `goto` statement..

## **goto Statements in switch Block**

```

void f2 ( int x, int z ) {
    int y = 0;

    switch(x) {
    case 0:
        if(x == y) {
            goto L1; /* Non-compliant - switch-clauses are treated as blocks */
        }
        break;
    case 1:
        y = x;
        L1: ++x;
    }
}

```

```
        break;
    default:
        break;
}
}
```

In this example, the label for the `goto` statement appears to occur in a block that encloses the block containing the `goto` statement. However, for the purposes of this rule, the software considers that each `case` statement begins a new block. Therefore, the `goto` statement violates the rule.

## Check Information

**Group:** Control Flow

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 15.1 | MISRA C:2012 Rule 15.2 | MISRA C:2012 Rule 15.4 | MISRA C:2012 Rule 16.1

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 15.4

There should be no more than one break or goto statement used to terminate any iteration statement

### Description

#### Rule Definition

*There should be no more than one break or goto statement used to terminate any iteration statement.*

#### Rationale

If you use one break or goto statement in your loop, you have one secondary exit point from the loop. Restricting number of exits from a loop in this way reduces visual complexity of your code.

#### Message in Report

There should be no more than one break or goto statement used to terminate any iteration statement.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### break Statements in Inner and Outer Loops

```
volatile int stop;
```

```
int func(int *arr, int size, int sat) {
    int i,j;
    int sum = 0;
    for (i=0; i< size; i++) { /* Compliant */
        if(sum >= sat)
            break;
        for (j=0; j< i; j++) { /* Compliant */
            if(stop)
                break;
            sum += arr[j];
        }
    }
}
```

In this example, the rule is not violated in both the inner and outer loop because both loops have one `break` statement each.

## break and goto Statements in Loop

```
volatile int stop;

void displayStopMessage();

int func(int *arr, int size, int sat) {
    int i;
    int sum = 0;
    for (i=0; i< size; i++) { /* Non-compliant */
        if(sum >= sat)
            break;
        if(stop)
            goto L1;
        sum += arr[i];
    }

    L1: displayStopMessage();
}
```

In this example, the rule is violated because the `for` loop has one `break` statement and one `goto` statement.

## goto Statement in Inner Loop and break Statement in Outer Loop

```
volatile int stop;

void displayMessage();

int func(int *arr, int size, int sat) {
    int i,j;
    int sum = 0;
    for (i=0; i< size; i++) { /* Non-compliant */
        if(sum >= sat)
            break;
        for (j=0; j< i; j++) { /* Compliant */
            if(stop)
                goto L1;
            sum += arr[i];
        }
    }
    L1: displayMessage();
}
```

In this example, the rule is not violated in the inner loop because you can exit the loop only through the one `goto` statement. However, the rule is violated in the outer loop because you can exit the loop through either the `break` statement or the `goto` statement in the inner loop.

## Check Information

**Group:** Control Flow

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 15.1 | MISRA C:2012 Rule 15.2 | MISRA C:2012 Rule 15.3

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 15.5

A function should have a single point of exit at the end

### Description

#### Rule Definition

*A function should have a single point of exit at the end.*

#### Rationale

This rule requires that a `return` statement must occur as the last statement in the function body. Otherwise, the following issues can occur:

- Code following a `return` statement can be unintentionally omitted.
- If a function that modifies some of its arguments has early `return` statements, when reading the code, it is not immediately clear which modifications actually occur.

#### Message in Report

A function should have a single point of exit at the end.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### More Than One `return` Statement in Function

```
#define MAX ((unsigned int)2147483647)
#define NULL (void*)0
```

```
typedef unsigned int bool_t;
bool_t false = 0;
bool_t true = 1;

bool_t f1(unsigned short n, char *p) {           /* Non-compliant */
    if(n > MAX) {
        return false;
    }

    if(p == NULL) {
        return false;
    }

    return true;
}
```

In this example, the rule is violated because there are three return statements.

One possible correction is to store the return value in a variable and return this variable just before the function ends.

```
#define MAX ((unsigned int)2147483647)
#define NULL (void*)0

typedef unsigned int bool_t;
bool_t false = 0;
bool_t true = 1;
bool_t return_value;

bool_t f2 (unsigned short n, char *p) {         /* Compliant */
    return_value = true;
    if(n > MAX) {
        return_value = false;
    }

    if(p == NULL) {
        return_value = false;
    }

    return return_value;
}
```

## **Check Information**

**Group:** Control Flow

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 17.4

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 15.6

The body of an iteration-statement or a selection-statement shall be a compound statement

### Description

#### Rule Definition

*The body of an iteration-statement or a selection-statement shall be a compound-statement.*

#### Rationale

The rule applies to:

- Iteration statements such as `while`, `do ... while` or `for`.
- Selection statements such as `if ... else` or `switch`.

If the block of code associated with an iteration or selection statement is not contained in braces, you can make mistakes about the association. For example:

- You can wrongly associate a line of code with an iteration or selection statement because of its indentation.
- You can accidentally place a semicolon following the iteration or selection statement. Because of the semicolon, the line following the statement is no longer associated with the statement even though you intended otherwise.

#### Message in Report

- The `else` keyword shall be followed by either a compound statement, or another `if` statement.
- An `if (expression)` construct shall be followed by a compound statement.
- The statement forming the body of a `while` statement shall be a compound statement.

- The statement forming the body of a do ... while statement shall be a compound statement.
- The statement forming the body of a for statement shall be a compound statement.
- The statement forming the body of a switch statement shall be a compound statement.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Iteration Block

```
int data_available = 1;
void f1(void) {
    while(data_available)                /* Non-compliant */
        process_data();

    while(data_available) {              /* Compliant */
        process_data();
    }
}
```

In this example, the second while block is enclosed in braces and does not violate the rule.

### Nested Selection Statements

```
void f1(void) {
    if(flag_1)                            /* Non-compliant */
        if(flag_2)                        /* Non-compliant */
            action_1();
    else                                    /* Non-compliant */
        action_2();
}
```

In this example, the rule is violated because the `if` or `else` blocks are not enclosed in braces. Unless indented as above, it is easy to associate the `else` statement with the inner `if`.

One possible correction is to enclose each block associated with an `if` or `else` statement in braces.

```
void f1(void) {
    if(flag_1) {
        if(flag_2) {
            action_1();
        }
    }
    else {
        action_2();
    }
}
```

## Spurious Semicolon After Iteration Statement

```
void f1(void) {
    while(flag_1);
    {
        flag_1 = action_1();
    }
}
```

In this example, the rule is violated even though the `while` statement is followed by a block in braces. The semicolon following the `while` statement causes the block to dissociate from the `while` statement.

The rule helps detect such spurious semicolons.

## Check Information

**Group:** Control Flow

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP19-C

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 15.7

All if ... else if constructs shall be terminated with an else statement

### Description

#### Rule Definition

*All if ... else if constructs shall be terminated with an else statement.*

#### Rationale

Unless there is a terminating `else` statement in an `if...elseif...else` construct, during code review, it is difficult to tell if you considered all possible results for the `if` condition.

#### Message in Report

All if ... else if constructs shall be terminated with an else statement.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Missing `else` Block

```
int get_flag_1(void);
int get_flag_2(void);
void action_1(void);
void action_2(void);
```

```
void f1(void) {
    int flag_1 = get_flag_1(), flag_2 = get_flag_2();
    if(flag_1) {
        action_1();
    }
    else if(flag_2) {
        /* Non-compliant */
        action_2();
    }
}
```

In this example, the rule is violated because the `if ... else if` construct does not have a terminating `else` block.

To avoid the rule violation, add a terminating `else` block. The block can be empty.

```
int get_flag_1(void);
int get_flag_2(void);
void action_1(void);
void action_2(void);

void f1(void) {
    int flag_1 = get_flag_1(), flag_2 = get_flag_2();
    if(flag_1) {
        action_1();
    }
    else if(flag_2) {
        /* Non-compliant */
        action_2();
    }
    else {
        /* No statement required */
        /* ; is optional */
    }
}
```

## Check Information

**Group:** Control Flow

**Category:** Required

**AGC Category:** Readability

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 16.5

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

# MISRA C:2012 Rule 16.1

All switch statements shall be well-formed

## Description

### Rule Definition

*All switch statements shall be well-formed*

### Rationale

The syntax for switch statements in C is not particularly rigorous and can allow complex, unstructured behavior. This rule and other rules impose a simple consistent structure on the switch statement.

### Polyspace Specification

Following the MISRA specifications, the coding rules checker also raises a violation of rule 16.1 if a switch statement violates one of these rules: 16.2, 16.3, 16.4, 16.5 or 16.6.

### Message in Report

All messages in report file begin with "MISRA-C switch statements syntax normative restriction."

- Initializers shall not be used in switch clauses.
- The child statement of a switch shall be a compound statement.
- All switch clauses shall appear at the same level.
- A switch clause shall only contain switch labels and switch clauses, and no other code.
- A switch statement shall only contain switch labels and switch clauses, and no other code.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Switch Statements

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** DCL41-C

## See Also

MISRA C:2012 Rule 15.3 | MISRA C:2012 Rule 16.2 | MISRA C:2012 Rule 16.3 | MISRA C:2012 Rule 16.4 | MISRA C:2012 Rule 16.5 | MISRA C:2012 Rule 16.6

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 16.2

A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement

### Description

#### Rule Definition

*A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement*

#### Rationale

The C Standard permits placing a switch label (for instance, `case` or `default`) before any statement contained in the body of a switch statement. This flexibility can lead to unstructured code. To prevent unstructured code, make sure a switch label appears only at the outermost level of the body of a switch statement.

#### Message in Report

All messages in report file begin with "MISRA-C switch statements syntax normative restriction."

- Initializers shall not be used in switch clauses.
- The child statement of a switch shall be a compound statement.
- All switch clauses shall appear at the same level.
- A switch clause shall only contain switch labels and switch clauses, and no other code.
- A switch statement shall only contain switch labels and switch clauses, and no other code.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to "Coding Rule Violations Not Displayed".

## **Check Information**

**Group:** Switch Statements

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**CERT C:** MSC20-C

## **See Also**

MISRA C:2012 Rule 16.1

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 16.3

An unconditional break statement shall terminate every switch-clause

### Description

#### Rule Definition

*An unconditional break statement shall terminate every switch-clause*

#### Rationale

A *switch-clause* is a case containing at least one statement. Two consecutive labels without an intervening statement is compliant with MISRA.

If you fail to end your switch-clauses with a break statement, then control flow “falls” into the next statement. This next statement can be another switch-clause, or the end of the switch. This behavior is sometimes intentional, but more often it is an error. If you add additional cases later, an unterminated switch-clause can cause problems.

#### Polyspace Specification

Polyspace raises a warning for each noncompliant case clause.

#### Message in Report

An unconditional break statement shall terminate every switch-clause.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Switch Statements

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 16.1

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 16.4

Every switch statement shall have a default label

### Description

#### Rule Definition

*Every switch statement shall have a default label*

#### Rationale

The requirement for a `default` label is defensive programming. Even if your switch covers all possible values, there is no guarantee that the input takes one of these values. Statements following the `default` label take some appropriate action. If the `default` label requires no action, use comments to describe why there are no specific actions.

#### Message in Report

Every switch statement shall have a default label.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Switch Statement Without `default`

```
short func1(short xyz){  
    switch(xyz){  
        case 0: /* Non-compliant - default label is required */
```

```
        ++xyz;
        break;
    case 1:
    case 2:
        break;
    }
    return xyz;
}
```

In this example, the switch statement does not include a default label, and is therefore noncompliant.

One possible correction is to use the default label to flag input errors. If your switch-clauses cover all expected input, then the default cases flags any input errors.

```
short func1(short xyz){
    switch(xyz){        /* Compliant */
        case 0:
            ++xyz;
            break;
        case 1:
        case 2:
            break;
        default:
            errorflag = 1;
            break;
    }
    if (errorflag == 1)
        return errorflag;
    else
        return xyz;
}
```

## Switch Statement for Enumerated Inputs

```
enum Colors{
    RED, GREEN, BLUE
};

enum Colors func2(enum Colors color){
    enum Colors next;
```

```
switch(color){          /* Non-compliant - default label is required */
    case RED:
        next = GREEN;
        break;
    case GREEN:
        next = BLUE;
        break;
    case BLUE:
        next = RED;
        break;
}
return next;
}
```

In this example, the switch statement does not include a default label, and is therefore noncompliant. Even though this switch statement handles all values of the enumeration, there is no guarantee that color takes one of the those values.

To be compliant, add the default label to the end of your switch. You can use this case to flag unexpected inputs.

```
enum Colors{
    RED, GREEN, BLUE, ERROR
};

enum Colors func2(enum Colors color){
    enum Colors next;

    switch(color){      /* Compliant */
        case RED:
            next = GREEN;
            break;
        case GREEN:
            next = BLUE;
            break;
        case BLUE:
            next = RED;
            break;
        default:
            next = ERROR;
            break;
    }
}
```

```
    return next;  
}
```

## Check Information

**Group:** Switch Statements

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** swtchdflt

## See Also

MISRA C:2012 Rule 2.1 | MISRA C:2012 Rule 16.1

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 16.5

A default label shall appear as either the first or the last switch label of a switch statement

### Description

#### Rule Definition

*A default label shall appear as either the first or the last switch label of a switch statement.*

#### Rationale

Using this rule, you can easily locate the default label within a switch statement.

#### Message in Report

A default label shall appear as either the first or the last switch label of a switch statement.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Default Case in switch Statements

```
void foo(int var){  
    switch(var){  
        default: /* Compliant - default is the first label */
```

```
        case 0:
            ++var;
            break;
        case 1:
        case 2:
            break;
    }

    switch(var){
        case 0:
            ++var;
            break;
        default: /* Non-compliant - default is mixed with the case labels */
        case 1:
        case 2:
            break;
    }

    switch(var){
        case 0:
            ++var;
            break;
        case 1:
        case 2:
        default: /* Compliant - default is the last label */
            break;
    }

    switch(var){
        case 0:
            ++var;
            break;
        case 1:
        case 2:
            break;
        default: /* Compliant - default is the last label */
            var = 0;
            break;
    }
}
```

This example shows the same switch statement several times, each with default in a different place. As the first, third, and fourth switch statements show, default must be

the first or last label. `default` can be part of a compound switch-clause (for instance, the third `switch` example), but it must be the last listed.

## Check Information

**Group:** Switch Statements

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 15.7 | MISRA C:2012 Rule 16.1

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 16.6

Every switch statement shall have at least two switch-clauses

### Description

#### Rule Definition

*Every switch statement shall have at least two switch-clauses.*

#### Rationale

A switch statement with a single path is redundant and can indicate a programming error.

#### Message in Report

Every switch statement shall have at least two switch-clauses.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Switch Statements

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

### See Also

MISRA C:2012 Rule 16.1

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 16.7

A switch-expression shall not have essentially Boolean type

### Description

#### Rule Definition

*A switch-expression shall not have essentially Boolean type*

#### Rationale

The C Standard requires the controlling expression to a `switch` statement to have an integer type. Because C implements Boolean values with integer types, it is possible to have a Boolean expression control a `switch` statement. For controlling flow with Boolean types, an `if-else` construction is more appropriate.

#### Polyspace Specification

If your configuration uses the `-boolean-types` option, the number of reported violations can increase.

#### Message in Report

A switch-expression shall not have essentially Boolean type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Switch Statements

**Category:** Required  
**AGC Category:** Advisory  
**Language:** C90, C99

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 17.1

The features of `<stdarg.h>` shall not be used

### Description

#### Rule Definition

*The features of `<stdarg.h>` shall not be used..*

#### Rationale

The rule forbids use of `va_list`, `va_arg`, `va_start`, `va_end`, and `va_copy`.

You can use these features in ways where the behavior is not defined in the Standard. For instance:

- You invoke `va_start` in a function but do not invoke the corresponding `va_end` before the function block ends.
- You invoke `va_arg` in different functions on the same variable of type `va_list`.
- `va_arg` has the syntax type `va_arg (va_list ap, type)`.

You invoke `va_arg` with a `type` that is incompatible with the actual type of the argument retrieved from `ap`.

#### Message in Report

The features of `<stdarg.h>` shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of `va_start`, `va_list`, `va_arg`, and `va_end`

```
#include<stdarg.h>
void f2(int n, ...) {
    int i;
    double val;
    va_list vl;                                /* Non-compliant */

    va_start(vl, n);                            /* Non-compliant */

    for(i = 0; i < n; i++)
    {
        val = va_arg(vl, double);              /* Non-compliant */
    }

    va_end(vl);                                /* Non-compliant */
}
```

In this example, the rule is violated because `va_start`, `va_list`, `va_arg` and `va_end` are used.

### Undefined Behavior of `va_arg`

```
#include <stdarg.h>
void h(va_list ap) {                            /* Non-compliant */
    double y;

    y = va_arg(ap, double );                   /* Non-compliant */
}

void g(unsigned short n, ...) {
    unsigned int x;
    va_list ap;                                /* Non-compliant */

    va_start(ap, n);                            /* Non-compliant */
    x = va_arg(ap, unsigned int);              /* Non-compliant */

    h(ap);
}
```

```
    /* Undefined - ap is indeterminate because va_arg used in h () */  
    x = va_arg(ap, unsigned int);      /* Non-compliant */  
}  
  
void f(void) {  
    /* undefined - uint32_t:double type mismatch when g uses va_arg () */  
    g(1, 2.0, 3.0);  
}
```

In this example, `va_arg` is used on the same variable `ap` of type `va_list` in both functions `g` and `h`. In `g`, the second argument is `unsigned int` and in `h`, the second argument is `double`. This type mismatch causes undefined behavior.

## Check Information

**Group:** Function

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL10-C, DCL11-C, ERR00-C

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 17.2

Functions shall not call themselves, either directly or indirectly

### Description

#### Rule Definition

*Functions shall not call themselves, either directly or indirectly.*

#### Rationale

Variables local to a function are stored in the call stack. If a function calls itself directly or indirectly several times, the available stack space can be exceeded, causing serious failure. Unless the recursion is tightly controlled, it is difficult to determine the maximum stack space required.

#### Message in Report

**Message in Report:** Function XX shall not call itself either directly or indirectly. Function XX is called indirectly by YY.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Direct and Indirect Recursion

```
void foo1( void ) {      /* Non-compliant - Indirect recursion foo1->foo2->foo1... */
    foo2();
    foo1();              /* Non-compliant - Direct recursion */
}
```

```
}  
  
void foo2( void ) {  
    foo1();  
}
```

In this example, the rule is violated because of:

- Direct recursion `foo1 → foo1`.
- Indirect recursion `foo1 → foo2 → foo1`.

## Check Information

**Group:** Function

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** MEM05-C

## See Also

### Polyspace Results

Number of Recursions | Number of Direct Recursions

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

### Introduced in R2014b

## MISRA C:2012 Rule 17.3

A function shall not be declared implicitly

### Description

#### Rule Definition

*A function shall not be declared implicitly.*

#### Rationale

An implicit declaration occurs when you call a function before declaring or defining it. When you declare a function explicitly before calling it, the compiler can match the argument and return types with the parameter types in the declaration. If an implicit declaration occurs, the compiler makes assumptions about the argument and return types. For instance, it assumes a return type of `int`. The assumptions might not agree with what you expect and cause undesired type conversions.

#### Message in Report

Function 'XX' has no complete visible prototype at call.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Function Not Declared Before Call

```
#include <math.h>
```

```
extern double power3 (double val, int exponent);
int getChoice(void);

double func() {
    double res;
    int ch = getChoice();
    if(ch == 0) {
        res = power(2.0, 10);    /* Non-compliant */
    }
    else if( ch==1) {
        res = power2(2.0, 10); /* Non-compliant */
    }
    else {
        res = power3(2.0, 10); /* Compliant */
        return res;
    }
}

double power2 (double val, int exponent) {
    return (pow(val, exponent));
}
```

In this example, the rule is violated when a function that is not declared is called in the code. Even if a function definition exists later in the code, the rule violation occurs.

The rule is not violated when the function is declared before it is called in the code. If the function definition exists in another file and is available only during the link phase, you can declare the function in one of the following ways:

- Declare the function with the `extern` keyword in the current file.
- Declare the function in a header file and include the header file in the current file.

## Check Information

**Group:** Function

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90

**CERT C:** DCL31-C, DCL36-C, EXP37-C

**ISO/IEC TS 17961 ID:** argcomp

## **See Also**

MISRA C:2012 Rule 8.2 | MISRA C:2012 Rule 8.4

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2014b**

## MISRA C:2012 Rule 17.4

All exit paths from a function with non-void return type shall have an explicit return statement with an expression

### Description

#### Rule Definition

*All exit paths from a function with non-void return type shall have an explicit return statement with an expression.*

#### Rationale

If a non-void function does not explicitly return a value but the calling function uses the return value, the behavior is undefined. To prevent this behavior:

- 1 You must provide return statements with an explicit expression.
- 2 You must ensure that during run time, at least one return statement executes.

#### Message in Report

Missing return value for non-void function 'XX'.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Missing Return Statement Along Certain Execution Paths

```
int absolute(int v) {  
    if(v < 0) {
```

```
        return v;
    }
}
```

In this example, the rule is violated because a return statement does not exist on all execution paths. If  $v \geq 0$ , then the control returns to the calling function without an explicit return value.

## Return Statement Without Explicit Expression

```
#define SIZE 10
int table[SIZE];

unsigned short lookup(unsigned short v) {
    if((v < 0) || (v > SIZE)) {
        return;
    }
    return table[v];
}
```

In this example, the rule is violated because the return statement in the if block does not have an explicit expression.

## Check Information

**Group:** Function

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 15.5

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 17.5

The function argument corresponding to a parameter declared to have an array type shall have an appropriate number of elements

### Description

#### Rule Definition

*The function argument corresponding to a parameter declared to have an array type shall have an appropriate number of elements.*

#### Rationale

If you use an array declarator for a function parameter instead of a pointer, the function interface is clearer because you can state the minimum expected array size. If you do not state a size, the expectation is that the function can handle an array of any size. In such cases, the size value is typically another parameter of the function, or the array is terminated with a sentinel value.

However, it is legal in C to specify an array size but pass an array of smaller size. This rule prevents you from passing an array of size smaller than the size you declared.

#### Message in Report

The function argument corresponding to a parameter declared to have an array type shall have an appropriate number of elements.

The argument type has *actual\_size* elements whereas the parameter type expects *expected\_size* elements.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Incorrect Array Size Passed to Function

```
void func(int arr[4]);

int main() {
    int arrSmall[3] = {1,2,3};
    int arr[4] = {1,2,3,4};
    int arrLarge[5] = {1,2,3,4,5};

    func(arrSmall);    /* Non-compliant */
    func(arr);        /* Compliant */
    func(arrLarge);   /* Compliant */

    return 0;
}
```

In this example, the rule is violated when `arrSmall`, which has size 3, is passed to `func`, which expects at least 4 elements.

## Check Information

**Group:** Functions

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90. C99

## See Also

MISRA C:2012 Rule 17.6

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 17.6

The declaration of an array parameter shall not contain the static keyword between the [ ]

### Description

#### Rule Definition

*The declaration of an array parameter shall not contain the static keyword between the [ ].*

#### Rationale

If you use the `static` keyword within [ ] for an array parameter of a function, you can inform a C99 compiler that the array contains a minimum number of elements. The compiler can use this information to generate efficient code for certain processors. However, in your function call, if you provide less than the specified minimum number, the behavior is not defined.

#### Message in Report

The declaration of an array parameter shall not contain the static keyword between the [ ].

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of static Keyword Within [ ] in Array Parameter

```
extern int arr1[20];  
extern int arr2[10];
```

```
/* Non-compliant: static keyword used in array declarator */
unsigned int total (unsigned int n, unsigned int arr[static 20]) {
    unsigned int i;
    unsigned int sum = 0;

    for (i=0U; i < n; i++) {
        sum+= arr[i];
    }

    return sum;
}

void func (void) {
    int res, res2;
    res = total (10U, arr1); /* Non-compliant - behavior not defined */
    res2 = total (20U, arr2); /* Non-compliant, even if behavior is defined */
}
```

In this example, the rule is violated when the `static` keyword is used within `[]` in the array parameter of function `total`. Even if you call `total` with array arguments where the behavior is well-defined, the rule violation occurs.

## Check Information

**Group:** Function

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 17.7

The value returned by a function having non-void return type shall be used

### Description

#### Rule Definition

*The value returned by a function having non-void return type shall be used.*

#### Rationale

You can unintentionally call a function with a non-void return type but not use the return value. Because the compiler allows the call, you might not catch the omission. This rule forbids calls to a non-void function where the return value is not used. If you do not intend to use the return value of a function, explicitly cast the return value to void.

#### Message in Report

The value returned by a function having non-void return type shall be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Used and Unused Return Values

```
unsigned int cutOff(unsigned int val) {
    if (val > 10 && val < 100) {
        return val;
    }
}
```

```
        else {
            return 0;
        }
    }

    unsigned int getVal(void);

    void func2(void) {
        unsigned int val = getVal(), res;
        cutOff(val);          /* Non-compliant */
        res = cutOff(val);    /* Compliant */
        (void)cutOff(val);    /* Compliant */
    }
}
```

In this example, the rule is violated when the return value of `cutOff` is not used subsequently.

The rule is not violated when the return value is:

- Assigned to another variable.
- Explicitly cast to `void`.

## Check Information

**Group:** Function

**Category:** Required

**AGC Category:** Readability

**Language:** C90, C99

**CERT C:** ERR33-C

**ISO/IEC TS 17961 ID:** liberr

## See Also

MISRA C:2012 Rule 2.2

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 17.8

A function parameter should not be modified

### Description

#### Rule Definition

*A function parameter should not be modified.*

#### Rationale

When you modify a parameter, the function argument corresponding to the parameter is not modified. However, you or another programmer unfamiliar with C can expect by mistake that the argument is also modified when you modify the parameter.

#### Message in Report

A function parameter should not be modified.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Function Parameter Modified

```
int input(void);  
  
void func(int param1, int* param2) {  
    param1 = input();    /* Non-compliant */  
}
```

```
    *param2 = input(); /* Compliant */  
}
```

In this example, the rule is violated when the parameter `param1` is modified.

The rule is not violated when the parameter is a pointer `param2` and `*param2` is modified.

## Check Information

**Group:** Functions

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 18.1

A pointer resulting from arithmetic on a pointer operand shall address an element of the same array as that pointer operand

### Description

#### Rule Definition

*A pointer resulting from arithmetic on a pointer operand shall address an element of the same array as that pointer operand.*

#### Rationale

Using an invalid array subscript can lead to erroneous behavior of the program. Run-time derived array subscripts are especially troublesome because they cannot be easily checked by manual review or static analysis.

The C Standard defines the creation of a pointer to one beyond the end of the array. The rule permits the C Standard. Dereferencing a pointer to one beyond the end of an array causes undefined behavior and is noncompliant.

#### Polyspace Specification

Polyspace flags this rule during the analysis as:

- Bug Finder — Array access out-of-bounds and Pointer access out-of-bounds
- Code Prover — Illegally dereferenced pointer and Out of bounds array index

Bug Finder and Code Prover check this rule differently and can show different results for this rule. In Code Prover, you can also see a difference in results based on your choice for the option `Verification level (-to)`. See “Check for Coding Rule Violations”.

## Message in Report

A pointer resulting from arithmetic on a pointer operand shall address an element of the same array as that pointer operand.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Pointers and Arrays

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP08-C, ARR30-C, ARR39-C

**ISO/IEC TS 17961 ID:** invptr, nullref

## See Also

MISRA C:2012 Dir 4.1 | MISRA C:2012 Rule 18.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 18.2

Subtraction between pointers shall only be applied to pointers that address elements of the same array

### Description

#### Rule Definition

*Subtraction between pointers shall only be applied to pointers that address elements of the same array.*

#### Rationale

This rule applies to expressions of the form `pointer_expression1 - pointer_expression2`. The behavior is undefined if `pointer_expression1` and `pointer_expression2`:

- Do not point to elements of the same array,
- Or do not point to the element one beyond the end of the array.

#### Polyspace Specification

This rule is raised whenever the analysis detects a Subtraction or comparison between pointers to different arrays.

#### Message in Report

Subtraction between pointers shall only be applied to pointers that address elements of the same array.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Subtracting Pointers

```
#include <stddef.h>

void f1 (int32_t *ptr)
{
    int32_t a1[10];
    int32_t a2[10];
    int32_t *p1 = &a1[ 1];
    int32_t *p2 = &a2[10];
    ptrdiff_t diff1, diff2, diff3;

    diff1 = p1 - a1;    // Compliant
    diff2 = p2 - a2;    // Compliant
    diff3 = p1 - p2;    // Non-compliant
}
```

In this example, the three subtraction expressions show the difference between compliant and noncompliant pointer subtractions. The `diff1` and `diff2` subtractions are compliant because the pointers point to the same array. The `diff3` subtraction is not compliant because `p1` and `p2` point to different arrays.

## Check Information

**Group:** Pointers and Arrays

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP08-C, ARR36-C

**ISO/IEC TS 17961 ID:** ptrobj

## See Also

MISRA C:2012 Dir 4.1 | MISRA C:2012 Rule 18.4

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 18.3

The relational operators `>`, `>=`, `<` and `<=` shall not be applied to objects of pointer type except where they point into the same object

### Description

#### Rule Definition

*The relational operators `>`, `>=`, `<`, and `<=` shall not be applied to objects of pointer type except where they point into the same object.*

#### Rationale

If two pointers do not point to the same object, comparisons between the pointers produces undefined behavior.

You can address the element beyond the end of an array, but you cannot access this element.

#### Message in Report

The relational operators `>`, `>=`, `<` and `<=` shall not be applied to objects of pointer type except where they point into the same object.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Pointer and Array Comparisons

```
void f1(void){
    int arr1[10];
    int arr2[10];
    int *ptr1 = arr1;

    if(ptr1 < arr2){}    /* Non-compliant */
    if(ptr1 < arr1){}    /* Compliant */
}
```

In this example, `ptr1` is a pointer to `arr1`. To be compliant with rule 18.3, you can compare only `ptr1` with `arr1`. Therefore, the comparison between `ptr1` and `arr2` is noncompliant.

### Structure Comparisons

```
struct limits{
    int lower_bound;
    int upper_bound;
};

void func2(void){
    struct limits lim_1 = { 2, 5 };
    struct limits lim_2 = { 10, 5 };

    if(&lim_1.lower_bound <= &lim_2.upper_bound){} /* Non-compliant */
    if(&lim_1.lower_bound <= &lim_1.upper_bound){} /* Compliant */
}
```

This example defines two `limits` structures, `lim1` and `lim2`, and compares the elements. To be compliant with rule 18.3, you can compare only the structure elements within a structure. The first comparison compares the `lower_bound` of `lim1` and the `upper_bound` of `lim2`. This comparison is noncompliant because the `lim_1.lower_bound` and `lim_2.upper_bound` are elements of two different structures.

## Check Information

**Group:** Pointers and Arrays

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP08-C

**ISO/IEC TS 17961 ID:** ptrobj

## See Also

MISRA C:2012 Dir 4.1

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 18.4

The `+`, `-`, `+=` and `-=` operators should not be applied to an expression of pointer type

### Description

#### Rule Definition

*The `+`, `-`, `+=` and `-=` operators should not be applied to an expression of pointer type.*

#### Rationale

The preferred form of pointer arithmetic is using the array subscript syntax `ptr[expr]`. This syntax is clear and less prone to error than pointer manipulation. With pointer manipulation, any explicitly calculated pointer value has the potential to access unintended or invalid memory addresses. Array indexing can also access unintended or invalid memory, but it is easier to review.

To a new C programmer, the expression `ptr+1` can be mistakenly interpreted as one plus the address of `ptr`. However, the new memory address depends on the size, in bytes, of the pointer's target. This confusion can lead to unexpected behavior.

When used with caution, pointer manipulation using `++` can be more natural (for instance, sequentially accessing locations during a memory test).

#### Polyspace Specification

Polyspace flags operations on pointers, for example, `Pointer + Integer`, `Integer + Pointer`, `Pointer - Integer`.

#### Message in Report

The `+`, `-`, `+=` and `-=` operators should not be applied to an expression of pointer type.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Pointers and Array Expressions

```
void fun1(void){
    unsigned char arr[10];
    unsigned char *ptr;
    unsigned char index = 0U;

    index = index + 1U;    /* Compliant - rule only applies to pointers */

    arr[index] = 0U;      /* Compliant */
    ptr = &arr[5];       /* Compliant */
    ptr = arr;
    ptr++;                /* Compliant - increment operator not + */
    *(ptr + 5) = 0U;     /* Non-compliant */
    ptr[5] = 0U;         /* Compliant */
}
```

This example shows various operations with pointers and arrays. The only operation in this example that is noncompliant is using the + operator directly with a pointer (line 12).

### Adding Array Elements Inside a for Loop

```
void fun2(void){
    unsigned char array_2_2[2][2] = {{1U, 2U}, {4U, 5U}};
    unsigned char i = 0U;
    unsigned char j = 0U;
    unsigned char sum = 0U;

    for(i = 0u; i < 2U; i++){
        unsigned char *row = array_2_2[ i ];

        for(j = 0u; j < 2U; j++){
            sum += row[ j ];          /* Compliant */
        }
    }
}
```

```
    }  
}
```

In this example, the second for loop uses the array pointer `row` in an arithmetic expression. However, this usage is compliant because it uses the array index form.

## Pointers and Array Expressions

```
void fun3(unsigned char *ptr1, unsigned char ptr2[ ]){  
    ptr1++;           /* Compliant */  
    ptr1 = ptr1 - 5;  /* Non-compliant */  
    ptr1 -= 5;        /* Non-compliant */  
    ptr1[2] = 0U;     /* Compliant */  
  
    ptr2++;           /* Compliant */  
    ptr2 = ptr2 + 3;  /* Non-compliant */  
    ptr2 += 3;        /* Non-compliant */  
    ptr2[3] = 0U;     /* Compliant */  
}
```

This example shows the offending operators used on pointers and arrays. Notice that the same types of expressions are compliant and noncompliant for both pointers and arrays.

If `ptr1` does not point to an array with at least six elements, and `ptr2` does not point to an array with at least 4 elements, this example violates rule 18.1.

## Check Information

**Group:** Pointers and Arrays

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 18.1 | MISRA C:2012 Rule 18.2

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 18.5

Declarations should contain no more than two levels of pointer nesting

### Description

#### Rule Definition

*Declarations should contain no more than two levels of pointer nesting.*

#### Rationale

The use of more than two levels of pointer nesting can seriously impair the ability to understand the behavior of the code. Avoid this usage.

#### Message in Report

Declarations should contain no more than two levels of pointer nesting.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Pointer Nesting

```
typedef char *INTPTR;

void function(char ** arrPar[ ])    /* Non-compliant - 3 levels */
{
    char ** obj2;                  /* Compliant */
    char *** obj3;                 /* Non-compliant */
}
```

```

    INTPTR *   obj4;           /* Compliant */
    INTPTR * const * const obj5; /* Non-compliant */
    char ** arr[10];         /* Compliant */
    char ** (*parr)[10];     /* Compliant */
    char * (**pparr)[10];    /* Compliant */
}

struct s{
    char *   s1;             /* Compliant */
    char **  s2;             /* Compliant */
    char *** s3;             /* Non-compliant */
};

struct s *   ps1;           /* Compliant */
struct s **  ps2;           /* Compliant */
struct s *** ps3;           /* Non-compliant */

char ** (* pfunc1)(void);   /* Compliant */
char ** (** pfunc2)(void);  /* Compliant */
char ** (***)pfunc3)(void); /* Non-compliant */
char ** (***) (* pfunc4)(void); /* Non-compliant */

```

This example shows various pointer declarations and nesting levels. Any pointer with more than two levels of nesting is considered noncompliant.

## Check Information

**Group:** Pointers and Arrays

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## **MISRA C:2012 Rule 18.6**

The address of an object with automatic storage shall not be copied to another object that persists after the first object has ceased to exist

### **Description**

#### **Rule Definition**

*The address of an object with automatic storage shall not be copied to another object that persists after the first object has ceased to exist.*

#### **Rationale**

The address of an object becomes indeterminate when the lifetime of that object expires. Any use of an indeterminate address results in undefined behavior.

#### **Polyspace Specification**

Polyspace flags a violation when assigning an address to a global variable, returning a local variable address, or returning a parameter address.

#### **Message in Report**

The address of an object with automatic storage shall not be copied to another object that persists after the first object has ceased to exist.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Address of Local Variables

```
char *func(void){
    char local_auto;
    return &local_auto /* Non-compliant
                       * &local_auto is indeterminate */
}
```

In this example, because `local_auto` is a local variable, after the function returns, the address of `local_auto` is indeterminate.

### Copying Pointer Addresses to Local Variables

```
char *sp;

void f(unsigned short u){
    g(&u);
}

void g(unsigned short *p){
    sp = p; /* Non-compliant
           * the parameter u from f is copied to static sp */
}

void h(void){
    static unsigned short *q;

    unsigned short x =0u;
    q = &x; /* Non-compliant -
           * &x stored in object with greater lifetime */
}
```

In this example, the function `g` stores a copy of its pointer parameter `p`. If `p` always points to an object with static storage duration, then the code is compliant with this rule. However, in this example, `p` points to an object with automatic storage duration. In such a case, copying the parameter `p` is noncompliant.

## **Check Information**

**Group:** Pointers and Arrays

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** DCL30-C, MEM30-C

**ISO/IEC TS 17961 ID:** addresscape

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 18.7

Flexible array members shall not be declared

### Description

#### Rule Definition

*Flexible array members shall not be declared.*

#### Rationale

Flexible array members are usually used with dynamic memory allocation. Dynamic memory allocation is banned by Directive 4.12 and Rule 21.3 on page 5-367.

#### Message in Report

Flexible array members shall not be declared.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Pointers and Arrays

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

### See Also

MISRA C:2012 Rule 21.3

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 18.8

Variable-length array types shall not be used

### Description

### Rule Definition

*Variable-length array types shall not be used.*

### Rationale

When the size of an array declared in a block or function prototype is not an integer constant expression, you specify variable array types. Variable array types are typically implemented as a variable size object stored on the stack. Using variable type arrays can make it impossible to determine statistically the amount of memory for the stack requires.

If the size of a variable-length array is negative or zero, the behavior is undefined.

If a variable-length array must be compatible with another array type, then the size of the array types must be identical and positive integers. If your array does not meet these requirements, the behavior is undefined.

If you use a variable-length array type in a `sizeof`, it is uncertain if the array size is evaluated or not.

### Message in Report

Variable-length array types shall not be used.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Pointers and Arrays

**Category:** Required

**AGC Category:** Required

**Language:** C99

## **See Also**

MISRA C:2012 Rule 13.6

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

# MISRA C:2012 Rule 19.1

An object shall not be assigned or copied to an overlapping object

## Description

### Rule Definition

*An object shall not be assigned or copied to an overlapping object.*

### Rationale

When you assign an object to another object with overlapping memory, the behavior is undefined. The exceptions are:

- You assign an object to another object with exactly overlapping memory and compatible type.
- You copy one object to another using `memmove`.

### Message in Report

- An object shall not be assigned or copied to an overlapping object.
- Destination and source of XX overlap, the behavior is undefined.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Assignment of Union Members

```
void func (void) {  
    union {
```

```
        short i;
        int j;
    } a = {0}, b = {1};

    a.j = a.i;    /* Non-compliant */
    a = b;        /* Compliant */
}
```

In this example, the rule is violated when `a.i` is assigned to `a.j` because the two variables have overlapping regions of memory.

## Assignment of Array Segments

```
#include <string.h>

int arr[10];

void func(void) {
    memcpy (&arr[5], &arr[4], 2u * sizeof(arr[0]));    /* Non-compliant */
    memcpy (&arr[5], &arr[4], sizeof(arr[0]));        /* Compliant */
    memcpy (&arr[1], &arr[4], 2u * sizeof(arr[0]));    /* Compliant */
}
```

In this example, memory equal to twice `sizeof(arr[0])` is the memory space taken up by two array elements. If that memory space begins from `&a[4]` and `&a[5]`, the two memory regions overlap. The rule is violated when the `memcpy` function is used to copy the contents of these two overlapping memory regions.

## Check Information

**Group:** Overlapping Storage

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 19.2

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 19.2

The union keyword should not be used

### Description

#### Rule Definition

*The union keyword should not be used.*

#### Rationale

If you write to a union member and read the same union member, the behavior is well-defined. But if you read a different member, the behavior depends on the relative sizes of the members. For instance:

- If you read a union member with wider memory size, the value you read is unspecified.
- Otherwise, the value is implementation-dependant.

#### Message in Report

The union keyword should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Possible Problems with union Keyword

```
unsigned int zext(unsigned int s)
{
```

```
union          /* Non-compliant */
{
    unsigned int ul;
    unsigned short us;
} tmp;

tmp.us = s;
return tmp.ul;    /* Unspecified value */
}
```

In this example, the 16-bit `short` field `tmp.us` is written but the wider 32-bit `int` field `tmp.ul` is read. Using the `union` keyword can cause such unspecified behavior. Therefore, the rule forbids using the `union` keyword.

## Check Information

**Group:** Overlapping Storage

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 19.1

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 20.1

`#include` directives should only be preceded by preprocessor directives or comments

### Description

#### Rule Definition

*#include directives should only be preceded by preprocessor directives or comments.*

#### Rationale

For better code readability, group all `#include` directives in a file at the top of the file. Undefined behavior can occur if you use `#include` to include a standard header file within a declaration or definition, or if you use part of the Standard Library before including the related standard header files.

#### Polyspace Specification

Polyspace flags text that precedes a `#include` directive. Polyspace ignores preprocessor directives, comments, spaces, or "new lines".

#### Message in Report

`#include` directives should only be preceded by preprocessor directives or comments.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to "Coding Rule Violations Not Displayed".

### Check Information

**Group:** Preprocessing Directives

**Category:** Advisory  
**AGC Category:** Advisory  
**Language:** C90, C99

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 20.2

The ' , " or \ characters and the /\* or // character sequences shall not occur in a header file name

### Description

#### Rule Definition

*The ' , " or \ characters and the /\* or // character sequences shall not occur in a header file name.*

#### Rationale

The program's behavior is undefined if:

- You use ' , " , \ , /\* or // between < > delimiters in a header name preprocessing token.
- You use ' , \ , /\* or // between " delimiters in a header name preprocessing token.

Although \ results in undefined behavior, many implementations accept / in its place.

#### Polyspace Specification

Polyspace flags the characters ' , " , \ , /\* or // between < and > in `#include <filename>`.

Polyspace flags the characters ' , \ , /\* or // between " and " in `#include "filename"`.

#### Message in Report

The ' , " or \ characters and the /\* or // character sequences shall not occur in a header file name.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 20.3

The `#include` directive shall be followed by either a `<filename>` or `"filename\"` sequence

### Description

#### Rule Definition

*The `#include` directive shall be followed by either a `<filename>` or `"filename"` sequence.*

#### Rationale

This rule applies only after macro replacement.

The behavior is undefined if an `#include` directive does not use one of the following forms:

- `#include <filename>`
- `#include "filename"`

#### Message in Report

- `'#include'` expects `"FILENAME\"` or `<FILENAME>`
- `'#include_next'` expects `"FILENAME\"` or `<FILENAME>`
- `'#include'` does not expect string concatenation.
- `'#include_next'` does not expect string concatenation.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 20.4

A macro shall not be defined with the same name as a keyword

### Description

#### Rule Definition

*A macro shall not be defined with the same name as a keyword.*

#### Rationale

Using macros to change the meaning of keywords can be confusing. The behavior is undefined if you include a standard header while a macro is defined with the same name as a keyword.

#### Message in Report

- The macro *macro\_name* shall not be redefined.
- The macro *macro\_name* shall not be undefined.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Redefining `int` keyword

```
#define int some_other_type
        /* Non-compliant - int keyword behavior altered */
#include <stdlib.h>
...
```

In this example, the `#define` violates Rule 20.4 because it alters the behavior of the `int` keyword. The inclusion of the standard header results in undefined behavior.

One possible correction is to use a different keyword:

```
#define int_mine some_other_type
#include <stdlib.h>
...
```

## Redefining keywords versus statements

```
#define while(E) for ( ; (E) ; ) /* Non-compliant - while redefined*/
#define unless(E) if ( !(E) )    /* Compliant*/

#define seq(S1, S2) do{ S1; S2;} while(false) /* Compliant*/
#define compound(S) {S;}                    /* Compliant*/
...
```

In this example, it is noncompliant to redefine the keyword `while`, but it is compliant to define a macro that expands to statements.

## Redefining keywords in different standards

```
#define inline
```

In this example, redefining `inline` is compliant in C90, but not in C99 because `inline` is not a keyword in C90.

## Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Languages:** C90, C99

**ISO/IEC TS 17961 ID:** resident

## See Also

MISRA C:2012 Rule 21.1

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 20.5

#undef should not be used

### Description

#### Rule Definition

*#undef should not be used.*

#### Rationale

#undef can make the software unclear which macros exist at a particular point within a translation unit.

#### Message in Report

#undef shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Advisory

**AGC Category:** Readability

**Language:** C90, C99

## **See Also**

### **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

## MISRA C:2012 Rule 20.6

Tokens that look like a preprocessing directive shall not occur within a macro argument

### Description

#### Rule Definition

*Tokens that look like a preprocessing directive shall not occur within a macro argument.*

#### Rationale

An argument containing sequences of tokens that otherwise act as preprocessing directives leads to undefined behavior.

#### Polyspace Specification

Polyspace looks for the # character in a macro arguments (outside a string or character constant).

#### Message in Report

Macro argument shall not look like a preprocessing directive.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Macro Expansion Causing Non-Compliance

```
#define M( A ) printf ( #A )
```

```
#include <stdio.h>

void foo(void){
    M(
#ifdef SW          /* Non-compliant */
    "Message 1"
#else
    "Message 2"    /* Compliant - SW not defined */
#endif           /* Non-compliant */
    );
}
```

This example shows a macro definition and the macro usage. `#ifdef SW` and `#endif` are noncompliant because they look like a preprocessing directive. Polyspace does not flag `#else "Message 2"` because after macro expansion, Polyspace knows `SW` is not defined. The expanded macro is `printf ("\nMessage 2\n");`

## Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 20.7

Expressions resulting from the expansion of macro parameters shall be enclosed in parentheses

### Description

#### Rule Definition

*Expressions resulting from the expansion of macro parameters shall be enclosed in parentheses.*

#### Rationale

If you do not use parentheses, then it is possible that operator precedence does not give the results that you want when macro substitution occurs.

If you are not using a macro parameter as an expression, then the parentheses are not necessary because no operators are involved in the macro.

#### Message in Report

Expanded macro parameter *param* shall be enclosed in parentheses.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Macro Expressions

```
#define macl(x, y) (x * y)
#define mac2(x, y) ((x) * (y))
```

```
void foo(void){
    int r;

    r = mac1(1 + 2, 3 + 4);      /* Non-compliant */
    r = mac1((1 + 2), (3 + 4)); /* Compliant */

    r = mac2(1 + 2, 3 + 4);      /* Compliant */
}
```

In this example, `mac1` and `mac2` are two defined macro expressions. The definition of `mac1` does not enclose the arguments in parentheses. In line 7, the macro expands to `r = (1 + 2 * 3 + 4)`; This expression can be `(1 + (2 * 3) + 4)` or `(1 + 2) * (3 + 4)`. However, without parentheses, the program does not know the intended expression. Line 8 uses parentheses, so the line expands to `(1 + 2) * (3 + 4)`. This macro expression is compliant.

The definition of `mac2` does enclose the argument in parentheses. Line 10 (the same macro arguments in line 7) expands to `(1 + 2) * (3 + 4)`. This macro and macro expression are compliant.

## Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** PRE01-C

## See Also

MISRA C:2012 Dir 4.9

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 20.8

The controlling expression of a `#if` or `#elif` preprocessing directive shall evaluate to 0 or 1

### Description

#### Rule Definition

*The controlling expression of a `#if` or `#elif` preprocessing directive shall evaluate to 0 or 1.*

#### Rationale

Strong typing requires that conditional inclusion preprocessing directives, `#if` or `#elif`, have a controlling expression that evaluates to a Boolean value.

#### Message in Report

The controlling expression of a `#if` or `#elif` preprocessing directive shall evaluate to 0 or 1.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Advisory

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 14.4

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

## MISRA C:2012 Rule 20.9

All identifiers used in the controlling expression of `#if` or `#elif` preprocessing directives shall be `#define'd` before evaluation

### Description

#### Rule Definition

*All identifiers used in the controlling expression of `#if` or `#elif` preprocessing directives shall be `#define'd` before evaluation.*

#### Rationale

If attempt to use a macro identifier in a preprocessing directive, and you have not defined that identifier, then the preprocessor assumes that it has a value of zero. This value might not meet developer expectations.

#### Message in Report

*Identifier* is not defined.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Macro Identifiers

```
#if M == 0                                /* Non-compliant - Not defined */  
#endif
```

```
#if defined (M)                /* Compliant - M is not evaluate */
#if M == 0                    /* Compliant - M is known to be defined */
#endif
#endif

#if defined (M) && (M == 0) /* Compliant
                          * if M defined, M evaluated in ( M == 0 ) */
#endif
```

This example shows various uses of `M` in preprocessing directives. The second and third `#if` clauses check to see if the software defines `M` before evaluating `M`. The first `#if` clause does not check to see if `M` is defined, and because `M` is not defined, the statement is noncompliant.

## Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

MISRA C:2012 Dir 4.9

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 20.10

The `#` and `##` preprocessor operators should not be used

### Description

#### Rule Definition

*The `#` and `##` preprocessor operators should not be used.*

#### Rationale

The order of evaluation associated with multiple `#`, multiple `##`, or a mix of `#` and `##` preprocessor operators is unspecified. In some cases, it is therefore not possible to predict the result of macro expansion.

The use of `##` can result in obscured code.

#### Message in Report

The `#` and `##` preprocessor operators should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Preprocessing Directives

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C90, C99

## **See Also**

MISRA C:2012 Rule 1.3 | MISRA C:2012 Rule 20.11

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

## MISRA C:2012 Rule 20.11

A macro parameter immediately following a # operator shall not immediately be followed by a ## operator

### Description

#### Rule Definition

*A macro parameter immediately following a # operator shall not immediately be followed by a ## operator.*

#### Rationale

The order of evaluation associated with multiple #, multiple ##, or a mix of # and ## preprocessor operators, is unspecified. Rule 20.10 discourages the use of # and ##. The result of a # operator is a string literal. It is extremely unlikely that pasting this result to any other preprocessing token results in a valid token.

#### Message in Report

The ## preprocessor operator shall not follow a macro parameter following a # preprocessor operator.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of # and ##

```
#define A( x )    #x                /* Compliant */
#define B( x, y ) x ## y           /* Compliant */
#define C( x, y ) #x ## y         /* Non-compliant */
```

In this example, you can see three uses of the # and ## operators. You can use these preprocessing operators alone (line 1 and line 2), but using # then ## is noncompliant (line 3).

## Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 20.10

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## MISRA C:2012 Rule 20.12

A macro parameter used as an operand to the # or ## operators, which is itself subject to further macro replacement, shall only be used as an operand to these operators

### Description

#### Rule Definition

*A macro parameter used as an operand to the # or ## operators, which is itself subject to further macro replacement, shall only be used as an operand to these operators.*

#### Rationale

The parameter to # or ## is not expanded prior to being used. The same parameter appearing elsewhere in the replacement text is expanded. If the macro parameter is itself subject to macro replacement, its use in mixed contexts within a macro replacement might not meet developer expectations.

#### Message in Report

Expanded macro parameter *param1* is also an operand of *op* operator.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## **See Also**

### **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

## MISRA C:2012 Rule 20.13

A line whose first token is # shall be a valid preprocessing directive

### Description

#### Rule Definition

*A line whose first token is # shall be a valid preprocessing directive*

#### Rationale

You typically use a preprocessing directive to conditionally exclude source code until a corresponding `#else`, `#elif`, or `#endif` directive is encountered. If your compiler does not detect a preprocessing directive because it is malformed or invalid, you can end up excluding more code than you intended.

If all preprocessing directives are syntactically valid, even in excluded code, this unintended code exclusion cannot happen.

#### Message in Report

Directive is not syntactically meaningful.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## **See Also**

### **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

## MISRA C:2012 Rule 20.14

All `#else`, `#elif` and `#endif` preprocessor directives shall reside in the same file as the `#if`, `#ifdef` or `#ifndef` directive to which they are related

### Description

#### Rule Definition

*All `#else`, `#elif` and `#endif` preprocessor directives shall reside in the same file as the `#if`, `#ifdef` or `#ifndef` directive to which they are related.*

#### Rationale

When conditional compilation directives include or exclude blocks of code and are spread over multiple files, confusion arises. If you terminate an `#if` directive within the same file, you reduce the visual complexity of the code and the chances of an error.

If you terminate `#if` directives within the same file, you can use `#if` directives in included files

#### Message in Report

- `'#else'` not within a conditional.
- `'#elseif'` not within a conditional.
- `'#endif'` not within a conditional.

Unterminated conditional directive.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Preprocessing Directives

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## **See Also**

### **Topics**

*"Check for Coding Rule Violations"*

*"Polyspace MISRA C:2012 Checkers"*

*"Software Quality Objective Subsets (C:2012)"*

# MISRA C:2012 Rule 21.1

#define and #undef shall not be used on a reserved identifier or reserved macro name

## Description

### Rule Definition

*#define and #undef shall not be used on a reserved identifier or reserved macro name.*

### Rationale

Reserved identifiers and reserved macro names are intended for use by the implementation. Removing or changing the meaning of a reserved macro can result in undefined behavior. This rule applies to the following:

- Identifiers or macro names beginning with an underscore
- Identifiers in file scope described in the C Standard Library (ISO/IEC 9899:1999, Section 7, "Library")
- Macro names described in the C Standard Library as being defined in a standard header (ISO/IEC 9899:1999, Section 7, "Library").

### Message in Report

- The macro *macro\_name* shall not be redefined.
- The macro *macro\_name* shall not be undefined.
- The macro *macro\_name* shall not be defined.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Defining or Undefining Reserved Identifiers

```
#undef __LINE__          /* Non-compliant - begins with _ */
#define _Guard_H 1      /* Non-compliant - begins with _ */
#undef _BUILTIN_sqrt     /* Non-compliant - implementation may
                        * use _BUILTIN_sqrt for other purposes,
                        * e.g. generating a sqrt instruction */
#define defined          /* Non-compliant - reserved identifier */
#define errno my_errno  /* Non-compliant - library identifier */
#define isneg(x) ( (x) < 0 ) /* Compliant - rule doesn't include
                        * future library directions */
```

### Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required

**Languages:** C90, C99

**CERT C:** DCL37-C

**ISO/IEC TS 17961 ID:** resident

### See Also

MISRA C:2012 Rule 20.4

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.2

A reserved identifier or macro name shall not be declared

### Description

#### Rule Definition

*A reserved identifier or macro name shall not be declared.*

#### Rationale

The Standard allows implementations to treat reserved identifiers specially. If you reuse reserved identifiers, you can cause undefined behavior.

#### Polyspace Specification

- If you define a macro name that corresponds to a standard library macro, object, or function, rule 21.1 is violated.
- The rule considers tentative definitions as definitions.

#### Message in Report

Identifier 'XX' shall not be reused.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required  
**Language:** C90, C99  
**CERT C:** DCL37-C  
**ISO/IEC TS 17961 ID:** resident

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.3

The memory allocation and deallocation functions of `<stdlib.h>` shall not be used

### Description

#### Rule Definition

*The memory allocation and deallocation functions of `<stdlib.h>` shall not be used.*

#### Rationale

Using memory allocation and deallocation routines can cause undefined behavior. For instance:

- You free memory that you had not allocated dynamically.
- You use a pointer that points to a freed memory location.

#### Polyspace Specification

If you use names of dynamic heap memory allocation functions for macros, and you expand the macros in the code, this rule is violated. It is assumed that rule 21.2 is not violated.

#### Message in Report

- The macro `<name>` shall not be used.
- Identifier `XX` should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of malloc, calloc, realloc and free

```
#include <stdlib.h>

static int foo(void);

typedef struct struct_1 {
    int a;
    char c;
} S_1;

static int foo(void) {

    _S_1 * ad_1;
    int * ad_2;
    int * ad_3;

    ad_1 = (S_1*)calloc(100U, sizeof(S_1));           /* Non-compliant */
    ad_2 = malloc(100U * sizeof(int));                /* Non-compliant */
    ad_3 = realloc(ad_3, 60U * sizeof(long));        /* Non-compliant */

    free(ad_1);                                       /* Non-compliant */
    free(ad_2);                                       /* Non-compliant */
    free(ad_3);                                       /* Non-compliant */

    return 1;
}
```

In this example, the rule is violated when the functions malloc, calloc, realloc and free are used.

## Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** API03-C

**ISO/IEC TS 17961 ID:** accfree, dblfree, insufmem

## **See Also**

MISRA C:2012 Rule 18.7

## **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2014b**

## MISRA C:2012 Rule 21.4

The standard header file <setjmp.h> shall not be used

### Description

#### Rule Definition

*The standard header file <setjmp.h> shall not be used.*

#### Rationale

Using `setjmp` and `longjmp`, you can bypass normal function call mechanisms and cause undefined behavior.

#### Polyspace Specification

If the `longjmp` function is a macro and the macro is expanded in the code, this rule is violated. It is assumed that rule 21.2 is not violated.

#### Message in Report

- The macro '<name>' shall not be used.
- Identifier XX should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required  
**Language:** C90, C99

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.5

The standard header file <signal.h> shall not be used

### Description

#### Rule Definition

*The standard header file <signal.h> shall not be used.*

#### Rationale

Using signal handling functions can cause implementation-defined and undefined behavior.

#### Polyspace Specification

If the signal function is a macro and the macro is expanded in the code, this rule is violated. It is assumed that rule 21.2 is not violated.

#### Message in Report

- The macro '<name>' shall not be used.
- Identifier XX should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** accsig, asyncsig, sigcall

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.6

The Standard Library input/output functions shall not be used

### Description

#### Rule Definition

*The Standard Library input/output functions shall not be used.*

#### Rationale

This rule applies to the functions that are provided by `<stdio.h>` and in C99, their character-wide equivalents provided by `<wchar.h>`. Using these functions can cause unspecified, undefined and implementation-defined behavior.

#### Polyspace Specification

If the Standard Library function is a macro and the macro is expanded in the code, this rule is violated. It is assumed that rule 21.2 is not violated.

#### Message in Report

- The macro '`<name>`' shall not be used.
- Identifier `XX` should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** invfmtstr, ioileave, taintformatio, usrfmt, xfilepos

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.7

The `atof`, `atoi`, `atol`, and `atoll` functions of `<stdlib.h>` shall not be used

### Description

#### Rule Definition

*The `atof`, `atoi`, `atol`, and `atoll` functions of `<stdlib.h>` shall not be used.*

#### Rationale

When a string cannot be converted, the behavior of these functions can be undefined.

#### Polyspace Specification

If the function is a macro and the macro is expanded in the code, this rule is violated. It is assumed that rule 21.2 is not violated.

#### Message in Report

- The macro '`<name>`' shall not be used.
- Identifier `XX` should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## **See Also**

### **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.8

The library functions `abort`, `exit`, `getenv` and `system` of `<stdlib.h>` shall not be used

### Description

#### Rule Definition

*The library functions `abort`, `exit`, `getenv` and `system` of `<stdlib.h>` shall not be used.*

#### Rationale

Using these functions can cause undefined and implementation-defined behaviors.

#### Polyspace Specification

In case the `abort`, `exit`, `getenv`, and `system` functions are actually macros, and the macros are expanded in the code, this rule is detected as violated. It is assumed that rule 21.2 is not violated.

#### Message in Report

- The macro '`<name>`' shall not be used.
- Identifier `XX` should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** libmod, libuse, syscall

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.9

The library functions `bsearch` and `qsort` of `<stdlib.h>` shall not be used

### Description

#### Rule Definition

*The library functions `bsearch` and `qsort` of `<stdlib.h>` shall not be used.*

#### Rationale

The comparison function in these library functions can behave inconsistently when the elements being compared are equal. Also, the implementation of `qsort` can be recursive and place unknown demands on the call stack.

#### Polyspace Specification

If the function is a macro and the macro is expanded in the code, this rule is violated. It is assumed that rule 21.2 is not violated.

#### Message in Report

- The macro '`<name>`' shall not be used.
- Identifier `XX` should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Libraries

**Category:** Required  
**AGC Category:** Required  
**Language:** C90, C99

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.10

The Standard Library time and date functions shall not be used

### Description

#### Rule Definition

*The Standard Library time and date functions shall not be used.*

#### Rationale

Using these functions can cause unspecified, undefined and implementation-defined behavior.

#### Polyspace Specification

If the function is a macro and the macro is expanded in the code, this rule is violated. It is assumed that rule 21.2 is not violated.

#### Message in Report

- The macro '<name>' shall not be used.
- Identifier XX should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required  
**Language:** C90, C99

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## **MISRA C:2012 Rule 21.11**

The standard header file `<tgmath.h>` shall not be used

### **Description**

#### **Rule Definition**

*The standard header file `<tgmath.h>` shall not be used.*

#### **Rationale**

Using the facilities of this header file can cause undefined behavior.

#### **Polyspace Specification**

If the function is a macro and the macro is expanded in the code, this rule is violated. It is assumed that rule 21.2 is not violated.

#### **Message in Report**

- The macro '`<name>`' shall not be used.
- Identifier `XX` should not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of Function in `tgmath.h`

```
#include <tgmath.h>

float f1, res;

void func(void) {
    res = sqrt(f1); /* Non-compliant */
}
```

In this example, the rule is violated when the `sqrt` macro defined in `tgmath.h` is used.

For this example, one possible correction is to use the function `sqrtf` defined in `math.h` for `float` arguments.

```
#include <math.h>

float f1, res;

void func(void) {
    res = sqrtf(f1);
}
```

## Check Information

**Group:** Standard Libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2014b**

## MISRA C:2012 Rule 21.12

The exception handling features of `<fenv.h>` should not be used

### Description

#### Rule Definition

*The exception handling features of `<fenv.h>` should not be used.*

#### Rationale

In some cases, the values of the floating-point status flags are unspecified. Attempts to access them can cause undefined behavior.

#### Message in Report

The exception handling features of `<fenv.h>` should not be used

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of Features in `<fenv.h>`

```
#include <fenv.h>

void func(float x, float y) {
    float z;

    feclearexcept(FE_DIVBYZERO);                /* Non-compliant */
}
```

```
    z = x/y;

    if(fetestexcept (FE_DIVBYZERO)) {          /* Non-compliant */
    }
    else {
#pragma STDC FENV_ACCESS ON
        z=x*y;
        if(z>x) {
#pragma STDC FENV_ACCESS OFF
            if(fetestexcept (FE_OVERFLOW)) { /* Non-compliant */
            }
        }
    }
}
```

In this example, the rule is violated when the identifiers `feclearexcept` and `fetestexcept`, and the macros `FE_DIVBYZERO` and `FE_OVERFLOW` are used.

## Check Information

**Group:** Standard libraries

**Category:** Advisory

**AGC Category:** Advisory

**Language:** C99

## See Also

### Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 21.13

Any value passed to a function in `<ctype.h>` shall be representable as an unsigned char or be the value EOF

### Description

#### Rule Definition

*Any value passed to a function in `<ctype.h>` shall be representable as an unsigned char or be the value EOF.*

#### Rationale

Functions in `<ctype.h>` have a well-defined behavior only for `int` arguments whose value is within the range of unsigned char or the negative value equivalent of EOF. The use of other values results in undefined behavior.

#### Polyspace Specification

Polyspace considers that the negative value equivalent of EOF is -1 and does not raise a violation if you pass -1 as argument to a function in `ctype.h`.

#### Message in Report

Any value passed to a function in `<ctype.h>` shall be representable as an unsigned char or be the value EOF.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Invalid Arguments for Functions from <ctype.h>

```
bool_t f (uint8_t a)
{
    return (    isdigit ((int32_t) a )    /* Compliant    */
            && isalpha ((int32_t) 'b')    /* Compliant    */
            && islower (    EOF)          /* Compliant    */
            && isalpha (    256));       /* Non-compliant */
}
```

In this example, the rule is violated when 256, which is neither an unsigned char or the value EOF, is passed as an input argument to the `isalpha` function.

---

**Note** The int casts in the above example are required to comply with Rule 10.3 on page 5-169.

---

## Check Information

**Group:** Standard libraries

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** chrsgnext

## See Also

MISRA C:2012 Rule 10.3

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 21.14

The Standard Library function `memcmp` shall not be used to compare null terminated strings

### Description

#### Rule Definition

*The Standard Library function `memcmp` shall not be used to compare null terminated strings.*

#### Rationale

If `memcmp` is used to compare two strings and the length of either string is less than the number of bytes compared, the strings can appear different even when they are logically the same. The characters after the null terminator are compared even though they do not form part of the string.

For instance:

```
memcmp(string1, string2, sizeof(string1))
```

can compare bytes after the null terminator if `string1` is longer than `string2`.

#### Message in Report

The Standard Library function `memcmp` shall not be used to compare null terminated strings.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Using memcmp for String Comparison

```
extern char buffer1[ 12 ];
extern char buffer2[ 12 ];
void f1 ( void )
{
    ( void ) strcpy ( buffer1, "abc" );
    ( void ) strcpy ( buffer2, "abc" );
    if ( memcmp ( buffer1, buffer2, sizeof ( buffer1 ) ) != 0 )
    {
        /* Non-compliant */
    }
}
```

In this example, the comparison in the `if` statement is noncompliant. The strings stored in `buffer1` and `buffer2` can be reported different, but this difference comes from uninitialized characters after the null terminators.

## Check Information

**Group:** Standard libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 21.15 | MISRA C:2012 Rule 21.16

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 21.15

The pointer arguments to the Standard Library functions `memcpy`, `memmove` and `memcmp` shall be pointers to qualified or unqualified versions of compatible types

### Description

#### Rule Definition

*The pointer arguments to the Standard Library functions `memcpy`, `memmove` and `memcmp` shall be pointers to qualified or unqualified versions of compatible types.*

#### Rationale

The functions

```
memcpy( arg1, arg2, num_bytes );  
memmove( arg1, arg2, num_bytes );  
memcmp( arg1, arg2, num_bytes );
```

perform a byte-by-byte copy, move or comparison between the memory locations that `arg1` and `arg2` point to. A byte-by-byte copy, move or comparison is meaningful only if `arg1` and `arg2` have compatible types.

Using pointers to different data types for `arg1` and `arg2` typically indicates a coding error.

#### Message in Report

The pointer arguments to the Standard Library functions `memcpy`, `memmove` and `memcmp` shall be pointers to qualified or unqualified versions of compatible types.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Incompatible Argument Types for memcpy

```
void f ( uint8_t s1[ 8 ], uint16_t s2[ 8 ] )  
{  
    ( void ) memcpy ( s1, s2, 8 ); /* Non-compliant */  
}
```

In this example, `s1` and `s2` are pointers to different data types. The `memcpy` statement copies eight bytes from one buffer to another.

Eight bytes represent the entire span of the buffer that `s1` points to, but only part of the buffer that `s2` points to. Therefore, the `memcpy` statement copies only part of `s2` to `s1`, which might be unintended.

## Check Information

**Group:** Standard libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 21.14 | MISRA C:2012 Rule 21.16

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 21.16

The pointer arguments to the Standard Library function `memcmp` shall point to either a pointer type, an essentially signed type, an essentially unsigned type, an essentially Boolean type or an essentially enum type

### Description

#### Rule Definition

*The pointer arguments to the Standard Library function `memcmp` shall point to either a pointer type, an essentially signed type, an essentially unsigned type, an essentially Boolean type or an essentially enum type.*

#### Rationale

The Standard Library function

```
memcmp ( lhs, rhs, num );
```

performs a byte-by-byte comparison of the first `num` bytes of the two objects that `lhs` and `rhs` point to.

Do not use `memcmp` for a byte-by-byte comparison of the following.

Type	Rationale
Structures	If members of a structure have different data types, your compiler introduces additional padding for data alignment in memory. The content of these extra padding bytes is meaningless. If you perform a byte-by-byte comparison of structures with <code>memcmp</code> , you compare even the meaningless data stored in the padding. You might reach the false conclusion that two data structures are not equal, even if their corresponding members have the same value.

Type	Rationale
Objects with essentially floating type	The same floating point value can be stored using different representations. If you perform a byte-by-byte comparison of two variables with <code>memcmp</code> , you can reach the false conclusion that the variables are unequal even when they have the same value. The reason is that the values are stored using two different representations.
Essentially char arrays	Essentially char arrays are typically used to store strings. In strings, the content in bytes after the null terminator is meaningless. If you perform a byte-by-byte comparison of two strings with <code>memcmp</code> , you might reach the false conclusion that two strings are not equal, even if the bytes before the null terminator store the same value.

## Message in Report

The pointer arguments to the Standard Library function `memcmp` shall point to either a pointer type, an *essentially signed* type, an *essentially unsigned* type, an *essentially Boolean* type or an *essentially enum* type.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Using `memcmp` for Comparison of Structures, Unions, and *essentially char* Arrays

```
struct S;
bool_t f1 ( struct S *s1, struct S *s2 )
{
    return ( memcmp ( s1, s2, sizeof ( struct S ) ) != 0 ); /* Non-compliant */
}

union U
{
    uint32_t range;
```

```
uint32_t height;
};
bool_t f2 ( union U *u1, union U *u2 )
{
    return ( memcmp ( u1, u2, sizeof ( union U ) ) != 0 ); /* Non-compliant */
}

const char a[ 6 ] = "task";
bool_t f3 ( const char b[ 6 ] )
{
    return ( memcmp ( a, b, 6 ) != 0 ); /* Non-compliant */
}
```

In this example:

- Structures `s1` and `s2` are compared in the `bool_t f1` function. The return value of this function might indicate that `s1` and `s2` are different due to padding. This comparison is noncompliant.
- Unions `u1` and `u2` are compared in the `bool_t f2` function. The return value of this function might indicate that `u1` and `u2` are the same due to unintentional comparison of `u1.range` and `u2.height`, or `u1.height` and `u2.range`. This comparison is noncompliant.
- Essentially char arrays `a` and `b` are compared in the `bool_t f3` function. The return value of this function might incorrectly indicate that the strings are different because the length of `a` (four) is less than the number of bytes compared (six). This comparison is noncompliant.

## Check Information

**Group:** Standard libraries

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** EXP42-C

**ISO/IEC TS 17961 ID:** padcomp

## See Also

MISRA C:2012 Rule 21.14 | MISRA C:2012 Rule 21.15

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 21.17

Use of the string handling function from `<string.h>` shall not result in accesses beyond the bounds of the objects referenced by their pointer parameters

### Description

#### Rule Definition

*Use of the string handling function from `<string.h>` shall not result in accesses beyond the bounds of the objects referenced by their pointer parameters.*

#### Rationale

Incorrect use of a string handling function might result in a read or write access beyond the bounds of the function arguments, resulting in undefined behavior.

#### Message in Report

Use of the string handling function from `<string.h>` shall not result in accesses beyond the bounds of the objects referenced by their pointer parameters.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Pointer Access Out of Bounds from `strcpy` Usage

```
char string[] = "Short";  
void f1 ( const char *str )  
{
```

```
        ( void ) strcpy ( string, "Too long to fit" );           /* Non-compliant */
        if ( strlen ( str ) < ( sizeof ( string ) - 1u ) )
        {
            ( void ) strcpy ( string, str );                     /* Compliant */
        }
    }

size_t f2 ( void )
{
    char text[ 5 ] = "Token";
    return strlen ( text );                                     /* Non-compliant */
}
```

In this example:

- The first use of `strcpy` is noncompliant because it attempts to write beyond the end of its destination argument `string`.
- The second use of `strcpy` is compliant because it attempts to write to the destination argument `string` only if the source argument `str` fits.
- The use of `strlen` is noncompliant. `strlen` computes the length of a string up to the null terminator. The character array `text` has no null terminator.

## Check Information

**Group:** Standard libraries

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**CERT C:** STR32-C

**ISO/IEC TS 17961 ID:** nonnullcs

## See Also

MISRA C:2012 Rule 21.18

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 21.18

The `size_t` argument passed to any function in `<string.h>` shall have an appropriate value

### Description

#### Rule Definition

*The `size_t` argument passed to any function in `<string.h>` shall have an appropriate value.*

#### Rationale

The value must be positive and not greater than the size of the smallest object passed by pointer to the function. For instance, suppose you use the `strncmp` function to compare two strings `lhs_string` and `rhs_string` as follows:

```
strncmp (lhs_string, rhs_string, num)
```

The third argument `num` must be positive and must not be greater than the size of `lhs_string` or `rhs_string`, whichever is smaller.

Otherwise, using the function can result in read or write access beyond the bounds of the function argument.

#### Message in Report

The `size_t` argument passed to any function in `<string.h>` shall have an appropriate value.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Incorrect `size_t` Argument for `memcmp`

```
char buf1[ 5 ] = "12345";
char buf2[ 10 ] = "1234567890";

void f ( void )
{
    if ( memcmp ( buf1, buf2, 5 ) == 0 )
    {
        /* Compliant */
    }
    if ( memcmp ( buf1, buf2, 6 ) == 0 )
    {
        /* Non-compliant */
    }
}
```

In this example, the first `if` statement is compliant. The `size_t` argument is five, which is same as the size of the smaller string, `buf1`.

By the same reasoning, the second `if` statement is noncompliant.

## Check Information

**Group:** Standard libraries

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** `libptr`

## See Also

MISRA C:2012 Rule 21.17

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 21.19

The pointers returned by the Standard Library functions `localeconv`, `getenv`, `setlocale` or `strerror` shall only be used as if they have pointer to `const`-qualified type

### Description

#### Rule Definition

*The pointers returned by the Standard Library functions `localeconv`, `getenv`, `setlocale` or `strerror` shall only be used as if they have pointer to `const`-qualified type.*

#### Rationale

The C99 Standard states that if the program modifies the structure pointed to by the value returned by `localeconv`, or the strings returned by `getenv`, `setlocale` or `strerro`, undefined behavior occurs. Treating the pointers returned by the various functions as if they were `const`-qualified allows an analysis tool to detect any attempt to modify an object through one of the pointers. Assigning the return values of the functions to `const`-qualified pointers results in the compiler issuing a diagnostic if an attempt is made to modify an object.

#### Message in Report

The pointers returned by the Standard Library functions `localeconv`, `getenv`, `setlocale` or `strerror` shall only be used as if they have pointer to `const`-qualified type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Returning Pointers from `setlocale` and `localeconv`

```
void f1 ( void )
{
    char *s1 = setlocale ( LC_ALL, 0 ); /* Non-compliant */
    struct lconv *conv = localeconv (); /* Non-compliant */
    s1[ 1 ] = 'A'; /* Undefined behavior */
    conv->decimal_point = "^"; /* Undefined behavior */
}

void f2 ( void )
{
    char str[128];
    (void) strcpy (str, setlocale ( LC_ALL, 0 ) ); /* Compliant */
    const struct lconv *conv = localeconv (); /* Compliant */
    conv->decimanl_point = "^" /* Constraint violation */
}

void f3 ( void )
{
    const struct lconv *conv = localeconv (); /* Compliant */
    conv->grouping[ 2 ] = 'x'; /* Non-compliant */
}
```

In the above example:

- The usage of `setlocale` and `localeconv` in the function `f1` are non-compliant as the returned pointers are assigned to non-`const`-qualified pointers.

---

**Note** The usage of `setlocale` and `localeconv` above are not constraint violations and will therefore not be reported by a compiler. However, an analysis tool will be able to report a violation.

---

- The usage of `setlocale` in the function `f2` is compliant as `strcpy` takes a `const char *` as its second parameter. The usage of `localeconv` in the function `f2` is compliant as the returned pointers are assigned to a `const`-qualified pointer. Any attempt to modify an object through a pointer will be reported by a compiler or analysis tool as this is a constraint violation.

- The usage of a `const`-qualified pointer in the function `f3` gives compile time protection of the value returned by `localeconv` but the same is not true for the strings it references. Modification of these strings can be detected by an analysis tool.

## Check Information

**Group:** Standard libraries

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**CERT C:** ENV30-C

**ISO/IEC TS 17961 ID:** libmod

## See Also

MISRA C:2012 Rule 7.4 | MISRA C:2012 Rule 11.8 | MISRA C:2012 Rule 21.8

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## **MISRA C:2012 Rule 21.20**

The pointer returned by the Standard Library functions `asctime`, `ctime`, `gmtime`, `localtime`, `localeconv`, `getenv`, `setlocale` or `strerror` shall not be used following a subsequent call to the same function

### **Description**

#### **Rule Definition**

*The pointer returned by the Standard Library functions `asctime`, `ctime`, `gmtime`, `localtime`, `localeconv`, `getenv`, `setlocale` or `strerror` shall not be used following a subsequent call to the same function.*

#### **Rationale**

The preceding functions return a pointer to an object within the Standard Library. Implementation for this object can use a static buffer that can be modified by a second call to the same function. Therefore the value accessed through a pointer before a subsequent call to the same function can change unexpectedly.

#### **Message in Report**

The pointer returned by the Standard Library functions `asctime`, `ctime`, `gmtime`, `localtime`, `localeconv`, `getenv`, `setlocale` or `strerror` shall not be used following a subsequent call to the same function.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of Return Value from getenv After Another Call to getenv

```
void f1( void )
{
    const char *res1;
    const char *res2;
    char copy[ 128 ];
    res1 = setlocale ( LC_ALL, 0 );
    ( void ) strcpy ( copy, res1 );
    res2 = setlocale ( LC_MONETARY, "French" );
    printf ( "%s\n", res1 ); /* Non-compliant */
    printf ( "%s\n", copy ); /* Compliant */
    printf ( "%s\n", res2 ); /* Compliant */
}
```

In this example:

- The first `printf` statement is non-compliant because the pointer returned by `setlocale` is used following a subsequent call to it when `res2` is assigned.
- The second `printf` statement is compliant because the copy operation performed by `strcpy` is made before a subsequent call to `setlocale` function is made.
- The third `printf` statement is compliant because there is no subsequent call to the `setlocale` function is made before use.

## Check Information

**Group:** Standard libraries

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**CERT C:** ENV34-C

**ISO/IEC TS 17961 ID:** libuse

## **See Also**

### **Topics**

*“Check for Coding Rule Violations”*

*“Polyspace MISRA C:2012 Checkers”*

*“Software Quality Objective Subsets (C:2012)”*

**Introduced in R2017a**

## **MISRA C:2012 Rule 22.1**

All resources obtained dynamically by means of Standard Library functions shall be explicitly released

### **Description**

#### **Rule Definition**

*All resources obtained dynamically by means of Standard Library functions shall be explicitly released.*

#### **Rationale**

Resources are something that you must return to the system once you have used them. Examples include dynamically allocated memory and file descriptors.

If you do not release resources explicitly as soon as possible, then a failure can occur due to exhaustion of resources.

#### **Message in Report**

All resources obtained dynamically by means of Standard Library functions shall be explicitly released.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Dynamic Memory

```
#include<stdlib.h>

void performOperation(int);

int func1(int num) {
    int *arr1 = (int*) malloc(num * sizeof(int));

    return 0;
}          /* Non-compliant - memory allocated to arr1 is not released */

int func2(int num) {
    int *arr2 = (int*) malloc(num * sizeof(int));

    free(arr2);
    return 0;
}          /* Compliant - memory allocated to arr2 is released */
```

In this example, the rule is violated when memory dynamically allocated using the malloc function is not freed using the free function before the end of scope.

### File Pointers

```
#include <stdio.h>
void func1( void ) {
    FILE *fp1;
    fp1 = fopen ( "data1.txt", "w" );
    fprintf ( fp1, "*" );

    fp1 = fopen ( "data2.txt", "w" );          /* Non-compliant */
    fprintf ( fp1, "!" );
    fclose ( fp1 );
}

void func2( void ) {
    FILE *fp2;
    fp2 = fopen ( "data1.txt", "w" );
```

```
    fprintf ( fp2, "*" );
    fclose(fp2);

    fp2 = fopen ( "data2.txt", "w" );           /* Compliant */
    fprintf ( fp2, "!" );
    fclose ( fp2 );
}
```

In this example, the file pointer `fp1` is pointing to a file `data1.txt`. Before `fp1` is explicitly dissociated from the file stream of `data1.txt`, it is used to access another file `data2.txt`. Therefore, the rule 22.1 is violated.

The rule is not violated in `func2` because file `data1.txt` is closed and the file pointer `fp2` is explicitly dissociated from `data1.txt` before it is reused.

## Check Information

**Group:** Resources

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** MEM30-C, FIO42-C

**ISO/IEC TS 17961 ID:** fileclose

## See Also

MISRA C:2012 Directive 4.13 | MISRA C:2012 Rule 21.3 | MISRA C:2012 Rule 21.6 | Resource leak

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

## Introduced in R2015b

## MISRA C:2012 Rule 22.2

A block of memory shall only be freed if it was allocated by means of a Standard Library function

### Description

#### Rule Definition

*A block of memory shall only be freed if it was allocated by means of a Standard Library function.*

#### Rationale

The Standard Library functions that allocate memory are `malloc`, `calloc` and `realloc`.

You free a block of memory when you pass its address to the `free` or `realloc` function. The following causes undefined behavior:

- You free a block of memory that you did not allocate.
- You free a block of memory that have already freed before.

#### Message in Report

A block of memory shall only be freed if it was allocated by means of a Standard Library function.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Memory Not Allocated Is Freed

```
#include <stdlib.h>

void func1(void) {
    int x=0;
    int *ptr=&x;

    free(ptr);
    /* Non-compliant: ptr is not dynamically allocated */
}
```

In this example, the rule is violated because the `free` function operates on a pointer that does not point to dynamically allocated memory.

### Memory Freed Twice

```
#include <stdlib.h>

void func(int arrSize) {
    int *ptr = (int*) malloc(arrSize* sizeof(int));

    free(ptr); /* Block of memory freed once */
    free(ptr); /* Non-compliant - Block of memory freed twice */
}
```

In this example, the rule is violated when the `free` function operates on `ptr` twice without a reallocation in between.

## Check Information

**Group:** Resources

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**CERT C:** MEM30-C, MEM34-C

**ISO/IEC TS 17961 ID:** `dblfree`, `xfree`

## **See Also**

Deallocation of previously deallocated pointer | Invalid free of pointer | MISRA C:2012 Directive 4.13 | MISRA C:2012 Rule 21.3

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 22.3

The same file shall not be open for read and write access at the same time on different streams

### Description

#### Rule Definition

*The same file shall not be open for read and write access at the same time on different streams.*

#### Rationale

If a file is both written and read via different streams, the behavior can be undefined.

#### Message in Report

The same file shall not be open for read and write access at the same time on different streams.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Opening File That Is Open in Another Stream

```
#include <stdio.h>

void func(void) {
    FILE *fw = fopen("tmp.txt", "r+");
```

```
    FILE *fr = fopen("tmp.txt", "r");    /* Non-compliant: File open in stream fw*/  
}
```

In this example, the rule is violated when the same file `tmp.txt` is opened in two streams. The FILE pointers `fw` and `fr` point to two different streams here.

## Check Information

**Group:** Resources

**Category:** Required

**AGC Category:** Required

**Language:** C

## See Also

MISRA C:2012 Rule 21.6 | Resource leak

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 22.4

There shall be no attempt to write to a stream which has been opened as read-only

### Description

#### Rule Definition

*There shall be no attempt to write to a stream which has been opened as read-only.*

#### Rationale

The Standard does not specify the behavior if an attempt is made to write to a read-only stream.

#### Message in Report

There shall be no attempt to write to a stream which has been opened as read-only.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Writing to File Opened as Read-Only

```
#include <stdio.h>

void func1(void) {
    FILE *fp1 = fopen("tmp.txt", "r");
    (void) fprintf(fp1, "Some text"); /* Non-compliant: Read-only stream */
    (void) fclose(fp1);
}
```

```
}  
  
void func2(void) {  
    FILE *fp2 = fopen("tmp.txt", "r+");  
    (void) fprintf(fp2, "Some text"); /* Compliant */  
    (void) fclose(fp2);  
}
```

In this example, the file stream associated with `fp1` is opened as read-only. The rule is violated when the stream is written.

## Check Information

**Group:** Resources

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

## See Also

MISRA C:2012 Rule 21.6 | Writing to read-only resource

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 22.5

A pointer to a FILE object shall not be dereferenced

### Description

#### Rule Definition

*A pointer to a FILE object shall not be dereferenced.*

#### Rationale

The Standard states that the address of a FILE object used to control a stream can be significant. Copying that object might not give the same behavior. This rule ensures that you cannot perform such a copy.

Directly manipulating a FILE object might be incompatible with its use as a stream designator.

#### Message in Report

A pointer to a FILE object shall not be dereferenced

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### FILE\* Pointer Dereferenced

```
#include <stdio.h>
```

```
void func(void) {  
    FILE *pf1;  
    FILE *pf2;  
    FILE f3;  
  
    pf2 = pf1;          /* Compliant */  
    f3 = *pf2;         /* Non-compliant */  
    pf2->_flags=0;     /* Non-compliant */  
}
```

In this example, the rule is violated when the FILE\* pointer pf2 is dereferenced.

## Check Information

**Group:** Resources

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

**ISO/IEC TS 17961 ID:** filecpy

## See Also

MISRA C:2012 Rule 21.6

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 22.6

The value of a pointer to a FILE shall not be used after the associated stream has been closed

### Description

#### Rule Definition

*The value of a pointer to a FILE shall not be used after the associated stream has been closed.*

#### Rationale

The Standard states that the value of a FILE\* pointer is indeterminate after you close the stream associated with it.

#### Message in Report

The value of a pointer to a FILE shall not be used after the associated stream has been closed.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of FILE Pointer After Closing Stream

```
#include <stdio.h>

void func(void) {
```

```
FILE *fp;
void *ptr;

fp = fopen("tmp", "w");
if(fp != NULL) {
    fclose(fp);
    fprintf(fp, "text");
}
}
```

In this example, the stream associated with the FILE\* pointer `fp` is closed with the `fclose` function. The rule is violated FILE\* pointer `fp` is used before the stream is re-opened.

## Check Information

**Group:** Resources

**Category:** Mandatory

**AGC Category:** Mandatory

**Language:** C90, C99

## See Also

MISRA C:2012 Directive 4.13 | MISRA C:2012 Rule 21.6 | Use of previously closed resource

## Topics

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2015b**

## MISRA C:2012 Rule 22.7

The macro EOF shall only be compared with the unmodified return value from any Standard Library function capable of returning EOF

### Description

#### Rule Definition

*The macro EOF shall only be compared with the unmodified return value from any Standard Library function capable of returning EOF.*

#### Rationale

The EOF value may become indistinguishable from a valid character code if the value returned is converted to another type. In such cases, testing the converted value against EOF will not reliably identify if the end of the file has been reached or if an error has occurred.

#### Message in Report

The macro EOF shall only be compared with the unmodified return value from any Standard Library function capable of returning EOF.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Possibly Misleading Results from Comparison with EOF

```
void f1 ( void )  
{
```

```
    char ch;
    ch = ( char ) getchar ();
    if ( EOF != ( int32_t ) ch ) /* Non-compliant */
    {
    }
}

void f2 ( void )
{
    char ch;
    ch = ( char ) getchar ();
    if ( !feof ( stdin ) ) /* Compliant */
    {
    }
}

void f3 ( void )
{
    int32_t i_ch;
    i_ch = getchar ();
    if ( EOF != i_ch ) /* Compliant */
    {
        char ch;
        ch = ( char ) i_ch;
    }
}
```

In this example:

- The test in the f1 function is non-compliant. It will not be reliable as the return value is cast to a narrower type before checking for EOF.
- The test in the f2 function is compliant. It shows how *feof()* can be used to check for EOF when the return value from *getchar()* has been subjected to type conversion.
- The test in the f3 function is compliant. It is reliable as the unconverted return value is used when checking for EOF.

## Check Information

**Group:** Resources

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99  
**CERT C:** FIO34-C  
**ISO/IEC TS 17961 ID:** chreof

## **See Also**

### **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 22.8

The value of `errno` shall be set to zero prior to a call to an `errno`-setting-function

### Description

#### Rule Definition

*The value of `errno` shall be set to zero prior to a call to an `errno`-setting-function.*

#### Rationale

If an error occurs during a call to an `errno`-setting-function, the function writes a nonzero value to `errno`. Otherwise, `errno` is not modified.

If you do not explicitly set `errno` to zero before a function call, it can contain values from a previous call. Checking `errno` for nonzero values after the function call can give the false impression that an error occurred.

`Errno`-setting functions include:

- `ftell`, `fgetpos`, `fgetwc` and related functions.
- `strtoimax`, `strtol` and related functions.

The wide-character equivalents such as `wcstoimax` and `wcstol` are also covered.

#### Message in Report

The value of `errno` shall be set to zero prior to a call to an `errno`-setting-function.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### errno Not Reset Before Use

```
#include <stdlib.h>
#include <errno.h>

double val = 0.0;

void f ( void )
{
    val = strtod("1.0",NULL); /* Non-compliant */
    if ( 0 == errno ) /* Check errno for nonzero values */
    {
        val = strtod("1.0",NULL); /* Compliant - case 1*/
        if ( 0 == errno ) /* Check errno for nonzero values */
        {
        }
    }
    else
    {
        errno = 0;
        val = strtod("1.0",NULL); /* Compliant - case 2*/
        if ( 0 == errno ) /* Check errno for nonzero values */
        {
        }
    }
}
```

In this example, the rule is violated when `strtod` is called but `errno` is not reset prior to the call.

The rule is not violated in the following cases:

- Case 1: `errno` is compared against zero and then `strtod` is called in the `if ( 0 == errno )` branch.
- Case 2: `errno` is explicitly set to zero and then `strtod` is called.

## Check Information

**Group:** Resources

**Category:** Required  
**AGC Category:** Required  
**Language:** C90, C99  
**CERT C:** ERR30-C  
**ISO/IEC TS 17961 ID:** inverrno

## **See Also**

MISRA C:2012 Rule 22.9 | MISRA C:2012 Rule 22.10

## **Topics**

“Check for Coding Rule Violations”  
“Polyspace MISRA C:2012 Checkers”  
“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 22.9

The value of `errno` shall be tested against zero after calling an `errno`-setting function

### Description

#### Rule Definition

*The value of `errno` shall be tested against zero after calling an `errno`-setting function.*

#### Rationale

If an error occurs during a call to an `errno`-setting-function, the function writes a nonzero value to `errno`. Otherwise, `errno` is not modified.

When `errno` is nonzero, the function return value is not likely to be correct. Before using this return value, you must test `errno` for nonzero values.

`Errno`-setting functions include:

- `ftell`, `fgetpos`, `fgetwc` and related functions.
- `strtoimax`, `strtol` and related functions.

The wide-character equivalents such as `wcstoimax` and `wcstol` are also covered.

#### Message in Report

The value of `errno` shall be tested against zero after calling an *`errno`-setting function*.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### errno Not Tested After Function Call

```
#include <stdlib.h>
#include <errno.h>

void func(void);
double val = 0.0;

void f1 ( void )
{
    errno = 0;
    val = strtod ( "1.0", NULL ); /* Non-compliant */
    func ();

    if ( 0 != errno )
    {
    }

    errno = 0;
    val = strtod ( "1.0", NULL ); /* Compliant */
    if ( 0 == errno )
    {
        func();
    }
}
```

In this example, the rule is violated when `errno` is not checked immediately after the first call to `strtod`. Instead, a second function `func` is called. `func` might use the value in the global variable `val`. The value can be incorrect if an error has occurred during the call to `strtod`.

The rule is not violated when `errno` is checked before operations that potentially use the return value of `strtod`.

## Check Information

**Group:** Resources

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** ERR33-C

**ISO/IEC TS 17961 ID:** inverrno

## **See Also**

MISRA C:2012 Rule 22.8 | MISRA C:2012 Rule 22.10

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

## MISRA C:2012 Rule 22.10

The value of `errno` shall only be tested when the last function to be called was an `errno`-setting function

### Description

#### Rule Definition

*The value of `errno` shall only be tested when the last function to be called was an `errno`-setting function.*

#### Rationale

Besides the `errno`-setting functions, the Standard does not enforce that other functions set `errno` on errors. Whether these functions set `errno` or not is implementation-dependent.

To detect errors, if you check `errno` alone, the validity of this check also becomes implementation-dependent. On implementations that do not require `errno` setting, even if you check `errno` alone, you can overlook error conditions.

For a list of `errno`-setting functions, see MISRA C:2012 Rule 22.8.

#### Message in Report

The value of `errno` shall only be tested when the last function to be called was an `errno`-setting function.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Incorrect Test of errno

```
void f ( void )
{
    float64_t f64;
    errno = 0;
    f64 = atof ( "A.12" );
    if ( 0 == errno ) /* Non-compliant */
    {
    }
    errno = 0;
    f64 = strtod ( "A.12", NULL );
    if ( 0 == errno ) /* Compliant */
    {
    }
}
```

In this example:

- The first `if` statement is noncompliant because `atof` may or may not set `errno` when an error is detected. `f64` may not have a valid value within this `if` statement.
- The second `if` statement is compliant because `strtod` is an *errno-setting function*. `f64` will have a valid value within this `if` statement.

## Check Information

**Group:** Resources

**Category:** Required

**AGC Category:** Required

**Language:** C90, C99

**CERT C:** ERR30-C

**ISO/IEC TS 17961 ID:** inverrno

## See Also

MISRA C:2012 Rule 22.8 | MISRA C:2012 Rule 22.9

## **Topics**

“Check for Coding Rule Violations”

“Polyspace MISRA C:2012 Checkers”

“Software Quality Objective Subsets (C:2012)”

**Introduced in R2017a**

# MISRA C++: 2008

---

## **MISRA C++:2008 Rule 0-1-1**

A project shall not contain unreachable code

### **Description**

#### **Rule Definition**

*A project shall not contain unreachable code.*

#### **Rationale**

This rule flags situations where a group of statements is unreachable because of syntactic reasons. For instance, code following a return statement are always unreachable.

Unreachable code involve unnecessary maintenance and can often indicate programming errors.

#### **Polyspace Specification**

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

#### **Message in Report**

A project shall not contain unreachable code.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Unreachable statements

```
int func(int arg) {
    int temp = 0;
    switch(arg) {
        temp = arg; // Noncompliant
        case 1:
        {
            break;
        }
        default:
        {
            break;
        }
    }
    return arg;
    arg++; // Noncompliant
}
```

These statements are unreachable:

- Statements inside a switch statement that do not belong to a case or default block.
- Statements after a return statement.

## Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 0-1-2

A project shall not contain infeasible paths

### Description

### Rule Definition

*A project shall not contain infeasible paths.*

### Rationale

This rule flags situations where a group of statements is redundant because of nonsyntactic reasons. For instance, an `if` condition is always true or false. Code that is unreachable from syntactic reasons are flagged by rule 0-1-1.

Unreachable or redundant code involve unnecessary maintenance and can often indicate programming errors.

### Polyspace Specification

Bug Finder and Code Prover check this rule differently. The analysis can produce different results.

- Bug Finder uses the `Dead code` and `Useless if` checkers to detect violations of this rule.
- Code Prover does not use run-time checks to detect violations of this rule. Instead, Code Prover detects the violations at compile time.

### Message in Report

A project shall not contain infeasible paths.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Boolean Operations with Invariant Results

```
void func (unsigned int arg) {  
    if (arg >= 0U) //Noncompliant  
        arg = 1U;  
    if (arg < 0U) //Noncompliant  
        arg = 1U;  
}
```

An unsigned int variable is nonnegative. Both if conditions involving the variable are always true or always false and are therefore redundant.

## Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 0-1-3

A project shall not contain unused variables

### Description

#### Rule Definition

*A project shall not contain unused variables.*

#### Polyspace Specification

The checker flags local or global variables that are declared or defined but not used anywhere in the source files. This specification also applies to members of structures and classes.

#### Message in Report

A project shall not contain unused variables.

Variable is never used or used only in unreachable code.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of Named Bit Field for Padding

```
#include <iostream>
struct S {
    unsigned char b1 : 3;
```

```
    unsigned char pad: 1; //Noncompliant
    unsigned char b2 : 4;
};
void init(struct S S_obj)
{
    S_obj.b1 = 0;
    S_obj.b2 = 0;
}
```

In this example, the bit field `pad` is used for padding the structure. Therefore, the field is never read or written and causes a violation of this rule. To avoid the violation, use an unnamed field for padding.

```
struct S {
    unsigned char b1 : 3;
    unsigned char : 1;
    unsigned char b2 : 4;
};
```

## Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2018a**

## MISRA C++:2008 Rule 0-1-5

A project shall not contain unused type declarations

### Description

#### Rule Definition

*A project shall not contain unused type declarations.*

#### Rationale

If a type is declared but not used, when reviewing the code later, it is unclear if the type is redundant or left unused by mistake.

Unused types can indicate coding errors. For instance, you declared an enumerated data type for some specialized data but used an integer type for the data.

#### Message in Report

A project shall not contain unused type declarations.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Unused enum Declaration

```
enum switchValue {low, medium, high}; //Noncompliant  
  
void operate(int userInput) {
```

```
switch(userInput) {
    case 0: // Turn on low setting
        break;
    case 1: // Turn on medium setting
        break;
    case 2: // Turn on high setting
        break;
    default: // Return error
}
}
```

In this example, the enumerated type `switchValue` is not used. Perhaps the intention was to use the type as `switch` input like this.

```
enum switchValue {low, medium, high}; //Compliant

void operate(switchValue userInput) {
    switch(userInput) {
        case low: // Turn on low setting
            break;
        case medium: // Turn on medium setting
            break;
        case high: // Turn on high setting
            break;
        default: // Return error
    }
}
```

## Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2018a**

## **MISRA C++:2008 Rule 0-1-7**

The value returned by a function having a non- void return type that is not an overloaded operator shall always be used

### **Description**

#### **Rule Definition**

*The value returned by a function having a non- void return type that is not an overloaded operator shall always be used.*

#### **Rationale**

The unused return value might indicate a coding error or oversight.

Overloaded operators are excluded from this rule because their usage must emulate built-in operators which might not use their return value.

#### **Polyspace Specification**

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

#### **Message in Report**

The value returned by a function having a non- void return type that is not an overloaded operator shall always be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Return Value Not Used

```
#include <iostream>
#include <new>

int assignMemory(int * ptr){
    int res = 1;
    ptr = new (std::nothrow) int;
    if(ptr==NULL) {
        res = 0;
    }
    return res;
}

void main() {
    int val;
    int status;

    assignMemory(&val); //Noncompliant
    status = assignMemory(&val); //Compliant
    (void)assignMemory(&val); //Compliant
}
```

The first call to the function `assignMemory` is noncompliant because the return value is not used. The second and third calls use the return value. The return value from the second call is assigned to a local variable.

The return value from the third call is cast to `void`. Casting to `void` indicates deliberate non-use of the return value and cannot be a coding oversight.

## Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 0-1-9**

There shall be no dead code

### **Description**

#### **Rule Definition**

*There shall be no dead code.*

#### **Rationale**

If an operation is reachable but removing the operation does not affect program behavior, the operation constitutes dead code. For instance, suppose that a variable is never read following a write operation. The write operation is redundant.

The presence of dead code can indicate an error in the program logic. Because a compiler can remove dead code, its presence can cause confusion for code reviewers.

#### **Message in Report**

There shall be no dead code.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Examples**

#### **Redundant Operations**

```
#define ULIM 10000
```

```
int func(int arg) {  
    int res;  
    res = arg*arg + arg;  
    if (res > ULIM)  
        res = 0; //Noncompliant  
    return arg;  
}
```

In this example, the operations involving `res` are redundant because the function `func` returns its argument `arg`. All operations involving `res` can be removed without changing the effect of the function.

The checker flags the last write operation on `res` because the variable is never read after that point. The dead code can indicate an unintended coding error. For instance, you intended to return the value of `res` instead of `arg`.

## Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2016b**

## **MISRA C++:2008 Rule 0-1-10**

Every defined function shall be called at least once

### **Description**

#### **Rule Definition**

*Every defined function shall be called at least once.*

#### **Rationale**

If a function with a definition is not called, it might indicate a serious coding error. For instance, the function call is unreachable or a different function is called unintentionally.

#### **Polyspace Specification**

The checker detects situations where a static function is defined but not called at all in its translation unit.

#### **Message in Report**

Every defined function shall be called at least once. The static function *funcName* is not called.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Uncalled Static Function

```
static void func1() {  
}  
  
static void func2() { //Noncompliant  
}  
  
void func3();  
  
int main() {  
    func1();  
    return 0;  
}
```

The static function `func2` is defined but not called.

The function `func3` is not called either, however, it is only declared and not defined. The absence of a call to `func3` does not violate the rule.

### Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 0-1-11

There shall be no unused parameters (named or unnamed) in nonvirtual functions

### Description

#### Rule Definition

*There shall be no unused parameters (named or unnamed) in nonvirtual functions.*

#### Rationale

Unused parameters often indicate later design changes. You perhaps removed all uses of a specific parameter but forgot to remove the parameter from the parameter list.

Unused parameters constitute an unnecessary overhead. You can also inadvertently call the function with a different number of arguments causing a parameter mismatch.

#### Message in Report

There shall be no unused parameters (named or unnamed) in non-virtual functions.

Function *funcName* has unused parameters.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Unused Parameters

```
typedef int (*callbackFn) (int a, int b);
```

```
int callback_1 (int a, int b) { //Compliant
    return a+b;
}

int callback_2 (int a, int b) { //Noncompliant
    return a;
}

int callback_3 (int, int b) { //Compliant - flagged by Polyspace
    return b;
}

int getCallbackNumber();
int getInput();

void main() {
    callbackFn ptrFn;
    int n = getCallbackNumber();
    int x = getInput(), y = getInput();
    switch(n) {
        case 0: ptrFn = &callback_1; break;
        case 1: ptrFn = &callback_2; break;
        default: ptrFn = &callback_3; break;
    }

    (*ptrFn)(x,y);
}
```

In this example, the three functions `callback_1`, `callback_2` and `callback_3` are used as callback functions. One of the three functions is called via a function pointer depending on a value obtained at run time.

- Function `callback_1` uses all its parameters and does not violate the rule.
- Function `callback_2` does not use its parameter `a` and violates this rule.
- Function `callback_3` also does not use its first parameter but it does not violate the rule because the parameter is unnamed. However, Polyspace flags the unused parameter as a rule violation. If you see a violation of this kind, justify the violation with comments. See “Address Polyspace Results Through Bug Fixes or Comments”.

## Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2016b**

## MISRA C++:2008 Rule 0-1-12

There shall be no unused parameters (named or unnamed) in the set of parameters for a virtual function and all the functions that override it

### Description

#### Rule Definition

*There shall be no unused parameters (named or unnamed) in the set of parameters for a virtual function and all the functions that override it.*

#### Rationale

Unused parameters often indicate later design changes. You perhaps removed all uses of a specific parameter but forgot to remove the parameter from the parameter list.

Unused parameters constitute an unnecessary overhead. You can also inadvertently call the function with a different number of arguments causing a parameter mismatch.

#### Polyspace Specification

Polyspace checks for unused parameters in virtual functions within single translation units.

For instance, if a base class contains a virtual method with an unused parameter but the derived class implementation of the method uses that parameter, the rule is not violated. However, if the base class and derived class are defined in different files, the checker, which operates file by file, flags a violation of this rule on the base class.

#### Message in Report

There shall be no unused parameters (named or unnamed) in the set of parameters for a virtual function and all the functions that override it.

Function *funcName* has unused parameters.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Unused Parameter in Virtual Function

```
class base {
    public:
        virtual void assignVal (int arg1, int arg2) = 0; //Noncompliant
        virtual void assignAnotherVal (int arg1, int arg2) = 0;
};

class derived1: public base {
    public:
        virtual void assignVal (int arg1, int arg2) {
            arg1 = 0;
        }
        virtual void assignAnotherVal (int arg1, int arg2) {
            arg1 = 1;
        }
};

class derived2: public base {
    public:
        virtual void assignVal (int arg1, int arg2) {
            arg1 = 0;
        }
        virtual void assignAnotherVal (int arg1, int arg2) {
            arg2 = 1;
        }
};
```

In this example, the second parameter of the virtual method `assignVal` is not used in any of the derived class implementations of the method.

On the other hand, the implementation of the virtual method `assignAnotherVal` in derived class `derived1` uses the first parameter of the method. The implementation in

derived2 uses the second parameter. Both parameters of `assignAnotherVal` are used and therefore the virtual method does not violate the rule.

## **Check Information**

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2016b**

## **MISRA C++:2008 Rule 0-2-1**

An object shall not be assigned to an overlapping object

### **Description**

#### **Rule Definition**

*An object shall not be assigned to an overlapping object.*

#### **Rationale**

When you assign an object to another object with overlapping memory, the behavior is undefined.

The exceptions are:

- You assign an object to another object with exactly overlapping memory and compatible type.
- You copy one object to another with memmove.

#### **Message in Report**

An object shall not be assigned to an overlapping object.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Assignment of Union Members

```
void func (void) {
    union {
        short i;
        int j;
    } a = {0}, b = {1};

    a.j = a.i;    //Noncompliant
    a = b;        //Compliant
}
```

In this example, the rule is violated when `a.i` is assigned to `a.j` because the two variables have overlapping regions of memory.

### Check Information

**Group:** Language Independent Issues

**Category:** Required

**Introduced in R2016b**

## MISRA C++:2008 Rule 1-0-1

All code shall conform to ISO/IEC 14882:2003 "The C++ Standard Incorporating Technical Corrigendum 1"

### Description

#### Rule Definition

*All code shall conform to ISO/IEC 14882:2003 "The C++ Standard Incorporating Technical Corrigendum 1".*

#### Polyspace Specification

The checker reports compilation errors as detected by a compiler that strictly adheres to the C++03 Standard (ISO/IEC 14882:2003).

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

#### Message in Report

The message has two parts:

- Rule statement:

All code shall conform to ISO/IEC 14882:2003 "The C++ Standard Incorporating Technical Corrigendum 1".

- Compilation error message such as:

Expected a ;

#### Troubleshooting

If you expect a rule violation but do not see it, refer to "Coding Rule Violations Not Displayed".

## **Check Information**

**Group:** General

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-3-1

Trigraphs shall not be used

### Description

#### Rule Definition

*Trigraphs shall not be used.*

#### Rationale

You denote trigraphs with two question marks followed by a specific third character (for instance, '??-' represents a '~' (tilde) character and '??)' represents a ']' ). These trigraphs can cause accidental confusion with other uses of two question marks.

For instance, the string

```
"(Date should be in the form ??-??-??)"
```

is transformed to

```
"(Date should be in the form ~~]"
```

but this transformation might not be intended.

#### Message in Report

Trigraphs shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 2-5-1**

Digraphs should not be used

### **Description**

#### **Rule Definition**

*Digraphs should not be used.*

#### **Rationale**

Digraphs are a sequence of two characters that are supposed to be treated as a single character. The checker flags use of these digraphs:

- `<%`, indicating `[`
- `%>`, indicating `]`
- `<:`, indicating `{`
- `:>`, indicating `}`
- `%:`, indicating `#`
- `%:%:`

When developing or reviewing code with digraphs, the developer or reviewer can incorrectly consider the digraph as a sequence of separate characters.

#### **Message in Report**

Digraphs should not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Lexical Conventions

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-7-1

The character sequence `/*` shall not be used within a C-style comment

### Description

#### Rule Definition

*The character sequence `/*` shall not be used within a C-style comment.*

#### Rationale

If your code contains a `/*` in a `/* */` comment, it typically means that you have inadvertently commented out code. See the example that follows.

#### Polyspace Specification

You cannot justify a violation of this rule using source code annotations.

#### Message in Report

The character sequence `/*` shall not be used within a C-style comment.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of `/*` in `/* */` Comment

```
void foo() {  
    /* Initializer functions
```

```
    setup();  
    /* Step functions */  
}
```

In this example, the call to `setup()` is commented out because the ending `*/` is omitted, perhaps inadvertently. The checker flags this issue by highlighting the `/*` in the `/* */` comment.

## Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 2-10-1**

Different identifiers shall be typographically unambiguous

### **Description**

#### **Rule Definition**

*Different identifiers shall be typographically unambiguous.*

#### **Rationale**

When you use identifiers that are typographically close, you can confuse between them.

The identifiers should not differ by:

- The interchange of a lowercase letter with its uppercase equivalent.
- The presence or absence of the underscore character.
- The interchange of the letter O and the digit 0.
- The interchange of the letter I and the digit 1.
- The interchange of the letter I and the letter l.
- The interchange of the letter S and the digit 5.
- The interchange of the letter Z and the digit 2.
- The interchange of the letter n and the letter h.
- The interchange of the letter B and the digit 8.
- The interchange of the letters rn and the letter m.

#### **Polyspace Specification**

The rule checker does not consider the fully qualified names of variables when checking this rule.

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

## Message in Report

Different identifiers shall be typographically unambiguous.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Typographically Ambiguous Identifiers

```
void func(void) {
    int id1_numval;
    int id1_num_val; /* Non-compliant */

    int id2_numval;
    int id2_numVal; /* Non-compliant */

    int id3_lvalue;
    int id3_Ivalue; /* Non-compliant */

    int id4_xyz;
    int id4_xy2; /* Non-compliant */

    int id5_zer0;
    int id5_zer0; /* Non-compliant */

    int id6_rn;
    int id6_m; /* Non-compliant */
}
```

In this example, the rule is violated when identifiers that can be confused for each other are used.

## Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-10-2

Identifiers declared in an inner scope shall not hide an identifier declared in an outer scope

### Description

#### Rule Definition

*Identifiers declared in an inner scope shall not hide an identifier declared in an outer scope.*

#### Rationale

The rule flags situations where the same identifier name is used in two variable declarations, one in an outer scope and the other in an inner scope.

```
int var;  
...  
{  
...  
    int var;  
...  
}
```

All uses of the name in the inner scope refers to the variable declared in the inner scope. However, a developer or code reviewer can incorrectly assume that the usage refers to the variable declared in the outer scope.

#### Polyspace Specification

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

The rule checker does not flag situations where the same identifier name is used in different logical scopes:

- The same name is used for a class data member and a variable outside the class.
- The same name is used for a method in a base and derived class.

## Message in Report

Identifiers declared in an inner scope shall not hide an identifier declared in an outer scope.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Local Variable Hiding Global Variable

```
int varInit = 1;

void doSomething(void);

void step(void) {
    int varInit = 0; //Noncompliant
    if(varInit)
        doSomething();
}
```

In this example, `varInit` defined in `func` hides the global variable `varInit`. The `if` condition refers to the local `varInit` and the block is unreachable, but you might expect otherwise.

## Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-10-3

A typedef name (including qualification, if any) shall be a unique identifier

### Description

#### Rule Definition

*A typedef name (including qualification, if any) shall be a unique identifier.*

#### Rationale

The rule flags identifier declarations where the identifier name is the same as a previously declared typedef name. When you use identifiers that are identical, you can confuse between them.

#### Polyspace Specification

The checker does not flag situations where the conflicting names occur in different namespaces.

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

#### Message in Report

A typedef name (including qualification, if any) shall be a unique identifier.

Identifier *typeName* should not be reused.

Already used as typedef name (*fileName lineNumber*).

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Typedef Name Conflicting with Other Identifiers

```
namespace NS1 {
    typedef int WIDTH;
}

namespace NS2 {
    float WIDTH; //Compliant
}

void f1() {
    typedef int TYPE;
}

void f2() {
    float TYPE; //Noncompliant
}
```

In this example, the declaration of `TYPE` in `f2()` conflicts with a typedef declaration in `f1()`.

The checker does not flag the redeclaration of `WIDTH` because the two declarations belong to different namespaces.

## Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-10-4

A class, union or enum name (including qualification, if any) shall be a unique identifier

### Description

#### Rule Definition

*A class, union or enum name (including qualification, if any) shall be a unique identifier.*

#### Rationale

The rule flags identifier declarations where the identifier name is the same as a previously declared class, union or typedef name. When you use identifiers that are identical, you can confuse between them.

#### Polyspace Specification

The checker does not flag situations where the conflicting names occur in different namespaces.

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

#### Message in Report

A class, union or enum name (including qualification, if any) shall be a unique identifier.

Identifier *tagName* should not be reused.

Already used as tag name (*fileName lineNumber*).

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Typedef Name Conflicting with Other Identifiers

```
void f1() {  
    class floatVar {};  
}  
  
void f2() {  
    float floatVar; //Noncompliant  
}
```

In this example, the declaration of `floatVar` in `f2()` conflicts with a class declaration in `f1()`.

## Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-10-5

The identifier name of a non-member object or function with static storage duration should not be reused

### Description

#### Rule Definition

*The identifier name of a non-member object or function with static storage duration should not be reused.*

#### Rationale

The rule flags situations where the name of an identifier with static storage duration is reused. The rule applies even if the identifiers belong to different namespaces because the reuse leaves the chance that you mistake one identifier for the other.

#### Polyspace Specification

The rule checker flags redefined functions only when there is a declaration.

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

#### Message in Report

The identifier name of a non-member object or function with static storage duration should not be reused.

Identifier *name* should not be reused.

Already used as static identifier with static storage duration (*fileName lineNumber*).

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Reuse of Identifiers in Different Namespaces

```
namespace NS1 {  
    static int WIDTH;  
}  
  
namespace NS2 {  
    float WIDTH; //Noncompliant  
}
```

In this example, the identifier name `WIDTH` is reused in the two namespaces `NS1` and `NS2`.

## Check Information

**Group:** Lexical Conventions

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-10-6

If an identifier refers to a type, it shall not also refer to an object or a function in the same scope

### Description

#### Rule Definition

*If an identifier refers to a type, it shall not also refer to an object or a function in the same scope.*

#### Rationale

For compatibility with C, in C++, you are allowed to use the same name for a type and an object or function. However, the name reuse can cause confusion during development or code review.

#### Polyspace Specification

If the identifier is a function and the function is both declared and defined, then the violation is reported only once.

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

#### Message in Report

If an identifier refers to a type, it shall not also refer to an object or a function in the same scope.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Reuse of Name for Type and Object

```
struct vector{  
    int x;  
    int y;  
    int z;  
}vector; //Noncompliant
```

In this example, the name vector is used both for the structured data type and for an object of that type.

## Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-13-1

Only those escape sequences that are defined in ISO/IEC 14882:2003 shall be used

### Description

#### Rule Definition

*Only those escape sequences that are defined in ISO/IEC 14882:2003 shall be used.*

#### Rationale

Escape sequences are certain special characters represented in string and character literals. They are written with a backslash (\) followed by a character.

The C++ Standard (ISO/IEC 14882:2003, Sec. 2.13.2) defines a list of escape sequences. See Escape Sequences. Use of escape sequences (backslash followed by character) outside that list leads to undefined behavior.

#### Message in Report

Only those escape sequences that are defined in ISO/IEC 14882:2003 shall be used.

`\char` is not an ISO/IEC escape sequence.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Incorrect Escape Sequences

```
void func () {  
    const char a[2] = "\k"; \\Noncompliant  
    const char b[2] = "\b"; \\Compliant  
}
```

In this example, \k is not a recognized escape sequence.

### Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-13-2

Octal constants (other than zero) and octal escape sequences (other than "\0") shall not be used

### Description

#### Rule Definition

*Octal constants (other than zero) and octal escape sequences (other than "\0") shall not be used.*

#### Rationale

Octal constants are denoted by a leading zero. A developer or code reviewer can mistake an octal constant as a decimal constant with a redundant leading zero.

Octal escape sequences beginning with \ can also cause confusion. Inadvertently introducing an 8 or 9 in the digit sequence after \ breaks the escape sequence and introduces a new digit. A developer or code reviewer can ignore this issue and continue to treat the escape sequence as one digit.

#### Message in Report

Octal constants (other than zero) and octal escape sequences (other than "\0") shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to "Coding Rule Violations Not Displayed".

## Examples

### Use of Octal Constants and Octal Escape Sequences

```
void func(void) {
    int busData[6];

    busData[0] = 100;
    busData[1] = 108;
    busData[2] = 052;      //Noncompliant
    busData[3] = 071;      //Noncompliant
    busData[4] = '\109';   //Noncompliant
    busData[5] = '\100';   //Noncompliant
}
```

The checker flags all octal constants (other than zero) and all octal escape sequences (other than `\0`).

In this example:

- The octal escape sequence contains the digit 9, which is not an octal digit. This escape sequence has implementation-defined behavior.
- The octal escape sequence `\100` represents the number 64, but the rule checker forbids this use.

## Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-13-3

A "U" suffix shall be applied to all octal or hexadecimal integer literals of unsigned type

### Description

#### Rule Definition

*A "U" suffix shall be applied to all octal or hexadecimal integer literals of unsigned type.*

#### Rationale

The signedness of a constant is determined from:

- Value of the constant.
- Base of the constant: octal, decimal or hexadecimal.
- Size of the various types.
- Any suffixes used.

Unless you use a suffix `u` or `U`, another developer looking at your code cannot determine easily whether a constant is signed or unsigned.

#### Message in Report

A "U" suffix shall be applied to all octal or hexadecimal integer literals of unsigned type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to "Coding Rule Violations Not Displayed".

#### Check Information

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-13-4

Literal suffixes shall be upper case

### Description

#### Rule Definition

*Literal suffixes shall be upper case.*

#### Rationale

Literal constants can end with the letter `l` (el). Enforcing literal suffixes to be upper case removes potential confusion between the letter `l` and the digit `1`.

For consistency, use upper case constants for other suffixes such as `U` (unsigned) and `F` (float).

#### Message in Report

Literal suffixes shall be upper case.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of Literal Constants with Lower Case Suffix

```
const int a = 0l; //Noncompliant
const int b = 0L; //Compliant
```

In this example, both `a` and `b` are assigned the same literal constant. However, from a quick glance, one can mistakenly assume that `a` is assigned the value `01` (octal one).

## **Check Information**

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 2-13-5

Narrow and wide string literals shall not be concatenated

### Description

#### Rule Definition

*Narrow and wide string literals shall not be concatenated.*

#### Rationale

Narrow string literals are enclosed in double quotes without a prefix. Wide string literals are enclosed in double quotes with a prefix L outside the quotes. See string literals.

Concatenation of narrow and wide string literals can lead to undefined behavior.

#### Message in Report

Narrow and wide string literals shall not be concatenated.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Concatenation of Narrow and Wide String Literals

```
char array[] = "Hello" "World";  
wchar_t w_array[] = L"Hello" L"World";  
wchar_t mixed[] = "Hello" L"World"; //Noncompliant
```

In this example, in the initialization of the array `mixed`, the narrow string literal "Hello" is concatenated with the wide string literal L"World".

## **Check Information**

**Group:** Lexical Conventions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 3-1-1

It shall be possible to include any header file in multiple translation units without violating the One Definition Rule

### Description

#### Rule Definition

*It shall be possible to include any header file in multiple translation units without violating the One Definition Rule.*

#### Rationale

If a header file with variable or function definitions appears in multiple inclusion paths, the header file violates the One Definition Rule possibly leading to unpredictable behavior. For instance, a source file includes the header file `include.h` and another header file, which also includes `include.h`.

#### Polyspace Specification

The rule checker flags variable and function definitions in header files.

#### Message in Report

It shall be possible to include any header file in multiple translation units without violating the One Definition Rule.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 3-1-2

Functions shall not be declared at block scope

### Description

#### Rule Definition

*Functions shall not be declared at block scope.*

#### Rationale

It is a good practice to place all declarations at the namespace level.

Additionally, if you declare a function at block scope, it is often not clear if the statement is a function declaration or an object declaration with a call to the constructor.

#### Message in Report

Functions shall not be declared at block scope.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Function Declarations at Block Scope

```
class A {  
};  
  
void b1() {
```

```
    void func(); //Noncompliant  
    A a();      //Noncompliant  
}
```

In this example, the declarations of `func` and `a` are in the block scope of `b1`.

The second function declaration can cause confusion because it is not clear if `a` is a function that returns an object of type `A` or `a` is itself an object of type `A`.

## Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 3-1-3

When an array is declared, its size shall either be stated explicitly or defined implicitly by initialization

### Description

#### Rule Definition

*When an array is declared, its size shall either be stated explicitly or defined implicitly by initialization.*

#### Rationale

Though you can declare an incomplete array type and later complete the type, specifying the array size during the first declaration makes the subsequent array access less error-prone.

#### Message in Report

When an array is declared, its size shall either be stated explicitly or defined implicitly by initialization.

Size of array *arrayName* should be explicitly stated.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Array Size Unspecified During Declaration

```
int array[10];
extern int array2[]; //Noncompliant
int array3[]= {0,1,2};
extern int array4[10];
```

In the declaration of array2, the array size is unspecified.

## Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 3-2-1

All declarations of an object or function shall have compatible types

### Description

#### Rule Definition

*All declarations of an object or function shall have compatible types.*

#### Rationale

If the declarations of an object or function in two different translation units have incompatible types, the behavior is undefined.

#### Message in Report

All declarations of an object or function shall have compatible types.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 3-2-2

The One Definition Rule shall not be violated

### Description

#### Rule Definition

*The One Definition Rule shall not be violated.*

#### Rationale

Violations of the One Definition Rule leads to undefined behavior.

#### Polyspace Specification

The checker flags situations where the same function or object has multiple definitions and the definitions differ by some token.

#### Message in Report

The One Definition Rule shall not be violated.

Declaration of class *className* violates the One Definition Rule:

it conflicts with other declaration (*fileName lineNumber*).

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Different Tokens in Same Type Definition

This example uses two files:

- `file1.cpp`:

```
struct S
{
    int x;
    int y;
};
```

- `file2.cpp`:

```
struct S
{
    int y;
    int x;
};
```

In this example, both `file1.cpp` and `file2.cpp` define the structure `S`. However, the definitions switch the order of the structure fields.

## Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 3-2-3**

A type, object or function that is used in multiple translation units shall be declared in one and only one file

### **Description**

#### **Rule Definition**

*A type, object or function that is used in multiple translation units shall be declared in one and only one file.*

#### **Rationale**

If you declare an identifier in a header file, you can include the header file in any translation unit where the identifier is defined or used. In this way, you ensure consistency between:

- The declaration and the definition.
- The declarations in different translation units.

The rule enforces the practice of declaring external objects or functions in header files.

#### **Message in Report**

A type, object or function that is used in multiple translation units shall be declared in one and only one file.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 3-2-4**

An identifier with external linkage shall have exactly one definition

### **Description**

#### **Rule Definition**

*An identifier with external linkage shall have exactly one definition.*

#### **Rationale**

If an identifier has multiple definitions or no definitions, it can lead to undefined behavior.

#### **Message in Report**

An identifier with external linkage shall have exactly one definition.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Examples**

#### **Multiple Definitions of Identifier**

This example uses two files:

- file1.cpp:  
`int x = 0;`
- file2.cpp:

```
int x = 1;
```

The same identifier `x` is defined in both files.

## **Check Information**

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 3-3-1

Objects or functions with external linkage shall be declared in a header file

### Description

#### Rule Definition

*Objects or functions with external linkage shall be declared in a header file.*

#### Rationale

If you declare a function or object in a header file, it is clear that the function or object is meant to be accessed in multiple translation units. If you intend to access the function or object from a single translation unit, declare it `static` or in an unnamed namespace.

#### Message in Report

Objects or functions with external linkage shall be declared in a header file.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Declaration in Header File Missing

This example uses two files:

- `decls.h`:  
`extern int x;`

- file.cpp:

```
#include "decls.h"

int x = 0;
int y = 0; //Noncompliant
static int z = 0;
```

In this example, the variable `x` is declared in a header file but the variable `y` is not. The variable `z` is also not declared in a header file but it is declared with the `static` specifier and does not have external linkage.

## Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 3-3-2**

If a function has internal linkage then all re-declarations shall include the static storage class specifier

### **Description**

#### **Rule Definition**

*If a function has internal linkage then all re-declarations shall include the static storage class specifier.*

#### **Rationale**

If a function declaration has the `static` storage class specifier, it has internal linkage. Subsequent redeclarations of the function have internal linkage even without the `static` specifier.

However, if you do not specify the `static` keyword explicitly, it is not immediately clear from a declaration whether the function has internal linkage.

#### **Message in Report**

If a function has internal linkage then all re-declarations shall include the static storage class specifier.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Missing static Specifier from Redeclaration

```
static void func1 ();  
static void func2 ();  
  
void func1() {} //Noncompliant  
static void func2() {}
```

In this example, the function `func1` is declared `static` but defined without the `static` specifier.

## Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 3-4-1**

An identifier declared to be an object or type shall be defined in a block that minimizes its visibility

### **Description**

#### **Rule Definition**

*An identifier declared to be an object or type shall be defined in a block that minimizes its visibility.*

#### **Rationale**

Defining variables with the minimum possible block scope reduces the possibility that they might later be accessed unintentionally.

For instance, if an object is meant to be accessed in one function only, declare the object local to the function.

#### **Polyspace Specification**

The rule checker determines if an object is used in one block only. If the object is used in one block but defined outside the block, the checker raises a violation.

#### **Message in Report**

An identifier declared to be an object or type shall be defined in a block that minimizes its visibility.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of Global Variable in Single Function

```
static int countReset; //Noncompliant

volatile int check;

void increaseCount() {
    int count = countReset;
    while(check%2) {
        count++;
    }
}
```

In this example, the variable `countReset` is declared global used in one function only. A compliant solution declares the variable local to the function to reduce its visibility.

## Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 3-9-1

The types used for an object, a function return type, or a function parameter shall be token-for-token identical in all declarations and re-declarations

### Description

#### Rule Definition

*The types used for an object, a function return type, or a function parameter shall be token-for-token identical in all declarations and re-declarations.*

#### Rationale

If a redeclaration is not token-for-token identical to the previous declaration, it is not clear from visual inspection which object or function is being redeclared.

#### Polyspace Specification

The rule checker compares the current declaration with the last seen declaration.

#### Message in Report

The types used for an object, a function return type, or a function parameter shall be token-for-token identical in all declarations and re-declarations.

Variable *varName* is not compatible with previous declaration.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Identical Declarations That Do Not Match Token for Token

```
typedef int* intptr;  
  
int* map;  
extern intptr map; //Noncompliant  
  
intptr table;  
extern intptr table; //Compliant
```

In this example, the variable `map` is declared twice. The second declaration uses a `typedef` which resolves to the type of the first declaration. Because of the `typedef`, the second declaration is not token-for-token identical to the first.

## Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 3-9-2

typedefs that indicate size and signedness should be used in place of the basic numerical types

### Description

#### Rule Definition

*typedefs that indicate size and signedness should be used in place of the basic numerical types.*

#### Rationale

When the amount of memory being allocated is important, using specific-length types makes it clear how much storage is being reserved for each object.

#### Polyspace Specification

The rule checker does not raise violations in templates that are not instantiated.

#### Message in Report

typedefs that indicate size and signedness should be used in place of the basic numerical types.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Direct Use of Basic Numerical Types

```
typedef unsigned int uint32_t;  
  
unsigned int x = 0;          //Noncompliant  
uint32_t y = 0;           //Compliant
```

In this example, the declaration of `x` is noncompliant because it uses the basic type `int` directly.

### Check Information

**Group:** Basic Concepts

**Category:** Advisory

**Introduced in R2013b**

## **MISRA C++:2008 Rule 3-9-3**

The underlying bit representations of floating-point values shall not be used

### **Description**

#### **Rule Definition**

*The underlying bit representations of floating-point values shall not be used.*

#### **Rationale**

The underlying bit representations of floating point values vary across compilers. If you directly use the underlying representation of floating point values, your program is not portable across implementations.

#### **Polyspace Specification**

The rule checker flags conversions from pointers to floating point types into pointers to integer types, and vice versa.

#### **Message in Report**

The underlying bit representations of floating-point values shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Using Underlying Representation of Floating-Point Values

```
float fabs2(float f) {  
    unsigned int* ptr = reinterpret_cast <unsigned int*> (&f); //Noncompliant  
    *(ptr + 3) &= 0x7f;  
    return f;  
}
```

In this example, the `reinterpret_cast` attempts to cast a floating-point value to an integer and access the underlying bit representation of the floating point value.

## Check Information

**Group:** Basic Concepts

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 4-5-1

Expressions with type `bool` shall not be used as operands to built-in operators other than the assignment operator `=`, the logical operators `&&`, `||`, `!`, the equality operators `==` and `!=`, the unary `&` operator, and the conditional operator

### Description

#### Rule Definition

*Expressions with type `bool` shall not be used as operands to built-in operators other than the assignment operator `=`, the logical operators `&&`, `||`, `!`, the equality operators `==` and `!=`, the unary `&` operator, and the conditional operator.*

#### Message in Report

Expressions with type `bool` shall not be used as operands to built-in operators other than the assignment operator `=`, the logical operators `&&`, `||`, `!`, the equality operators `==` and `!=`, the unary `&` operator, and the conditional operator.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Conversions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 4-5-2

Expressions with type enum shall not be used as operands to built-in operators other than the subscript operator [ ], the assignment operator =, the equality operators == and !=, the unary & operator, and the relational operators <, <=, >, >=

### Description

#### Rule Definition

*Expressions with type enum shall not be used as operands to built-in operators other than the subscript operator [ ], the assignment operator =, the equality operators == and !=, the unary & operator, and the relational operators <, <=, >, >=.*

#### Message in Report

Expressions with type enum shall not be used as operands to built-in operators other than the subscript operator [ ], the assignment operator =, the equality operators == and !=, the unary & operator, and the relational operators <, <=, >, >=.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Conversions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 4-5-3

Expressions with type (plain) `char` and `wchar_t` shall not be used as operands to built-in operators other than the assignment operator `=`, the equality operators `==` and `!=`, and the unary `&` operator. N

### Description

#### Rule Definition

*Expressions with type (plain) `char` and `wchar_t` shall not be used as operands to built-in operators other than the assignment operator `=`, the equality operators `==` and `!=`, and the unary `&` operator. N*

#### Message in Report

Expressions with type (plain) `char` and `wchar_t` shall not be used as operands to built-in operators other than the assignment operator `=`, the equality operators `==` and `!=`, and the unary `&` operator. N

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Conversions

**Category:** Required

**Introduced in R2013b**

# MISRA C++:2008 Rule 4-10-1

NULL shall not be used as an integer value

## Description

### Rule Definition

*NULL shall not be used as an integer value.*

### Polyspace Specification

The checker flags assignment of NULL to an integer variable or binary operations involving NULL and an integer. Assignments can be direct or indirect such as passing NULL as integer argument to a function.

### Message in Report

NULL shall not be used as an integer value.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Standard Conversions

**Category:** Required

**Introduced in R2018a**

## MISRA C++:2008 Rule 4-10-2

Literal zero (0) shall not be used as the null-pointer-constant

### Description

#### Rule Definition

*Literal zero (0) shall not be used as the null-pointer-constant.*

#### Polyspace Specification

The checker flags assignment of 0 to a pointer variable or binary operations involving 0 and a pointer. Assignments can be direct or indirect such as passing 0 as pointer argument to a function.

#### Message in Report

Literal zero (0) shall not be used as the null-pointer-constant.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Standard Conversions

**Category:** Required

**Introduced in R2018a**

## MISRA C++:2008 Rule 5-0-1

The value of an expression shall be the same under any order of evaluation that the standard permits

### Description

#### Rule Definition

*The value of an expression shall be the same under any order of evaluation that the standard permits.*

#### Rationale

If an expression results in different values depending on the order of evaluation, its value becomes implementation-defined.

#### Polyspace Specification

An expression can have different values under the following conditions:

- The same variable is modified more than once in the expression, or is both read and written.
- The expression allows more than one order of evaluation.

Therefore, the rule checker forbids expressions where a variable is modified more than once and can cause different results under different orders of evaluation.

#### Message in Report

The value of an expression shall be the same under any order of evaluation that the standard permits.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Variable Modified More Than Once in Expression

```
int a[10], b[10];
#define COPY_ELEMENT(index) (a[(index)]=b[(index)])

void main () {
    int i=0, k=0;

    COPY_ELEMENT (k);          /* Compliant */
    COPY_ELEMENT (i++);       /* Non-compliant */
}
```

In this example, the rule is violated by the statement `COPY_ELEMENT(i++)` because `i++` occurs twice and the order of evaluation of the two expressions is unspecified.

### Variable Modified and Used in Multiple Function Arguments

```
void f (unsigned int param1, unsigned int param2) {}

void main () {
    unsigned int i=0;
    f ( i++, i );                /* Non-compliant */
}
```

In this example, the rule is violated because it is unspecified whether the operation `i++` occurs before or after the second argument is passed to `f`. The call `f(i++,i)` can translate to either `f(0,0)` or `f(0,1)`.

## Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-0-2**

Limited dependence should be placed on C++ operator precedence rules in expressions

### **Description**

#### **Rule Definition**

*Limited dependence should be placed on C++ operator precedence rules in expressions.*

#### **Rationale**

Use parentheses to clearly indicate the order of evaluation.

#### **Message in Report**

Limited dependence should be placed on C++ operator precedence rules in expressions.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-3

A cvalue expression shall not be implicitly converted to a different underlying type

### Description

#### Rule Definition

*A cvalue expression shall not be implicitly converted to a different underlying type.*

#### Polyspace Specification

The checker assumes that `ptrdiff_t` is signed integer.

#### Message in Report

A cvalue expression shall not be implicitly converted to a different underlying type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-0-4**

An implicit integral conversion shall not change the signedness of the underlying type

### **Description**

#### **Rule Definition**

*An implicit integral conversion shall not change the signedness of the underlying type.*

#### **Rationale**

Some conversions from signed to unsigned data types can lead to implementation-defined behavior. You can see unexpected results from the conversion.

#### **Polyspace Specification**

The checker assumes that `ptrdiff_t` is a signed integer.

If the conversion is to a narrower integer with a different sign, then rule 5-0-4 takes precedence over rule 5-0-6. Only rule 5-0-4 is shown.

#### **Message in Report**

An implicit integral conversion shall not change the signedness of the underlying type.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-0-5**

There shall be no implicit floating-integral conversions

### **Description**

#### **Rule Definition**

*There shall be no implicit floating-integral conversions.*

#### **Polyspace Specification**

This rule takes precedence over 5-0-4 and 5-0-6 if they apply at the same time.

#### **Message in Report**

There shall be no implicit floating-integral conversions.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-6

An implicit integral or floating-point conversion shall not reduce the size of the underlying type

### Description

#### Rule Definition

*An implicit integral or floating-point conversion shall not reduce the size of the underlying type.*

#### Rationale

A conversion that reduces the size of the underlying type can result in loss of information.

#### Polyspace Specification

If the conversion is to a narrower integer with a different sign then C++ 5-0-4 takes precedence over C++ 5-0-6.

#### Message in Report

An implicit integral or floating-point conversion shall not reduce the size of the underlying type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-7

There shall be no explicit floating-integral conversions of a cvalue expression

### Description

#### Rule Definition

*There shall be no explicit floating-integral conversions of a cvalue expression.*

#### Rationale

If you evaluate an expression and later cast the result to a different type, the cast has no effect on the underlying type of the evaluation. For instance, in this example, the result of an integer division is then cast to a floating-point type.

```
short num;  
short den;  
float res;  
res= static_cast<float> (num/den);
```

However, a developer or code reviewer can expect that the evaluation uses the data type to which the result is cast later. For instance, one can expect a floating-point division because of the later cast.

#### Message in Report

There shall be no explicit floating-integral conversions of a cvalue expression.

Complex expression of underlying type *typeBeforeConversion* may only be cast to narrower integer type of same signedness, however the destination type is *typeAfterconversion*.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Conversion of Division Result from Integer to Floating Point

```
void func() {
    short num;
    short den;
    short res_short;
    float res_float;

    res_float = static_cast<float> (num/den); //Noncompliant

    res_short = num/den;
    res_short = static_cast<float> (res_float); //Compliant
}
```

In this example, the first cast on the division result violates the rule but the second cast does not.

- The first cast can lead to the incorrect expectation that the expression is evaluated with an underlying type `float`.
- The second cast makes it clear that the expression is evaluated with the underlying type `short`. The result is then cast to the type `float`.

## Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-8

An explicit integral or floating-point conversion shall not increase the size of the underlying type of a cvalue expression

### Description

#### Rule Definition

*An explicit integral or floating-point conversion shall not increase the size of the underlying type of a cvalue expression.*

#### Rationale

If you evaluate an expression and later cast the result to a different type, the cast has no effect on the underlying type of the evaluation. For instance, in this example, the sum of two short operands is cast to the wider type int.

```
short op1;  
short op2;  
int res;  
res= static_cast<int> (op1 + op2);
```

However, a developer or code reviewer can expect that the evaluation uses the data type to which the result is cast later. For instance, one can expect a sum with the underlying type int because of the later cast.

#### Message in Report

An explicit integral or floating-point conversion shall not increase the size of the underlying type of a cvalue expression.

Complex expression of underlying type *typeBeforeConversion* may only be cast to narrower integer type of same signedness, however the destination type is *typeAfterconversion*.

## Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Conversion of Sum to Wider Integer Type

```
void func() {
    short op1;
    short op2;
    int res;

    res = static_cast<int> (op1 + op2); //Noncompliant
    res = static_cast<int> (op1) + op2; //Compliant
}
```

In this example, the first cast on the sum violates the rule but the second cast does not.

- The first cast can lead to the incorrect expectation that the sum is evaluated with an underlying type `int`.
- The second cast first converts one of the operands to `int` so that the sum is actually evaluated with the underlying type `int`.

## Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-9

An explicit integral conversion shall not change the signedness of the underlying type of a cvalue expression

### Description

#### Rule Definition

*An explicit integral conversion shall not change the signedness of the underlying type of a cvalue expression.*

#### Message in Report

An explicit integral conversion shall not change the signedness of the underlying type of a cvalue expression.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-10

If the bitwise operators `~` and `<<` are applied to an operand with an underlying type of unsigned char or unsigned short, the result shall be immediately cast to the underlying type of the operand

### Description

#### Rule Definition

*If the bitwise operators `~` and `<<` are applied to an operand with an underlying type of unsigned char or unsigned short, the result shall be immediately cast to the underlying type of the operand.*

#### Message in Report

If the bitwise operators `~` and `<<` are applied to an operand with an underlying type of unsigned char or unsigned short, the result shall be immediately cast to the underlying type of the operand.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-11

The plain char type shall only be used for the storage and use of character values

### Description

#### Rule Definition

*The plain char type shall only be used for the storage and use of character values.*

#### Polyspace Specification

The checker raises a violation when a value of signed or unsigned integer type is implicitly converted to the plain char type.

#### Message in Report

The plain char type shall only be used for the storage and use of character values.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2015a**

## **MISRA C++:2008 Rule 5-0-12**

Signed char and unsigned char type shall only be used for the storage and use of numeric values

### **Description**

#### **Rule Definition**

*Signed char and unsigned char type shall only be used for the storage and use of numeric values.*

#### **Message in Report**

Signed char and unsigned char type shall only be used for the storage and use of numeric values.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2015a**

## MISRA C++:2008 Rule 5-0-13

The condition of an if-statement and the condition of an iteration- statement shall have type bool

### Description

#### Rule Definition

*The condition of an if-statement and the condition of an iteration- statement shall have type bool.*

#### Message in Report

The condition of an if-statement and the condition of an iteration- statement shall have type bool.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-0-14**

The first operand of a conditional-operator shall have type bool

### **Description**

#### **Rule Definition**

*The first operand of a conditional-operator shall have type bool.*

#### **Message in Report**

The first operand of a conditional-operator shall have type bool.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-15

Array indexing shall be the only form of pointer arithmetic

### Description

#### Rule Definition

*Array indexing shall be the only form of pointer arithmetic.*

#### Polyspace Specification

The checker flags:

- Arithmetic operations on all pointers, for instance  $p+I$ ,  $I+p$  and  $p-I$ , where  $p$  is a pointer and  $I$  an integer.
- Array indexing on nonarray pointers.

#### Message in Report

Array indexing shall be the only form of pointer arithmetic.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-0-17**

Subtraction between pointers shall only be applied to pointers that address elements of the same array

### **Description**

#### **Rule Definition**

*Subtraction between pointers shall only be applied to pointers that address elements of the same array.*

#### **Polyspace Specification**

Use Bug Finder for this checker. The rule checker performs the same checks as Subtraction or comparison between pointers to different arrays. Code Prover can fail to detect some violations.

#### **Message in Report**

Subtraction between pointers shall only be applied to pointers that address elements of the same array.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-18

>, >=, <, <= shall not be applied to objects of pointer type, except where they point to the same array

### Description

#### Rule Definition

*>, >=, <, <= shall not be applied to objects of pointer type, except where they point to the same array.*

#### Polyspace Specification

Use Bug Finder for this checker. The rule checker performs the same checks as Subtraction or comparison between pointers to different arrays. Code Prover can fail to detect some violations.

The checker ignores casts when showing the violation on relational operator use with pointers types.

#### Message in Report

>, >=, <, <= shall not be applied to objects of pointer type, except where they point to the same array.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-19

The declaration of objects shall contain no more than two levels of pointer indirection

### Description

#### Rule Definition

*The declaration of objects shall contain no more than two levels of pointer indirection.*

#### Message in Report

The declaration of objects shall contain no more than two levels of pointer indirection.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-0-20**

Non-constant operands to a binary bitwise operator shall have the same underlying type

### **Description**

#### **Rule Definition**

*Non-constant operands to a binary bitwise operator shall have the same underlying type.*

#### **Message in Report**

Non-constant operands to a binary bitwise operator shall have the same underlying type.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-0-21

Bitwise operators shall only be applied to operands of unsigned underlying type

### Description

#### Rule Definition

*Bitwise operators shall only be applied to operands of unsigned underlying type.*

#### Message in Report

Bitwise operators shall only be applied to operands of unsigned underlying type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-2-1

Each operand of a logical && or || shall be a postfix - expression

### Description

#### Rule Definition

*Each operand of a logical && or || shall be a postfix - expression.*

#### Polyspace Specification

During preprocessing, violations of this rule are detected on the expressions in `#if` directives.

The checker allows exceptions on associativity (a && b && c), (a || b || c).

#### Message in Report

Each operand of a logical && or || shall be a postfix - expression.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-2-2

A pointer to a virtual base class shall only be cast to a pointer to a derived class by means of `dynamic_cast`

### Description

#### Rule Definition

*A pointer to a virtual base class shall only be cast to a pointer to a derived class by means of `dynamic_cast`.*

#### Message in Report

A pointer to a virtual base class shall only be cast to a pointer to a derived class by means of `dynamic_cast`.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-2-3**

Casts from a base class to a derived class should not be performed on polymorphic types

### **Description**

#### **Rule Definition**

*Casts from a base class to a derived class should not be performed on polymorphic types.*

#### **Message in Report**

Casts from a base class to a derived class should not be performed on polymorphic types.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-2-4

C-style casts (other than void casts) and functional notation casts (other than explicit constructor calls) shall not be used

### Description

#### Rule Definition

*C-style casts (other than void casts) and functional notation casts (other than explicit constructor calls) shall not be used.*

#### Message in Report

C-style casts (other than void casts) and functional notation casts (other than explicit constructor calls) shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-2-5**

A cast shall not remove any const or volatile qualification from the type of a pointer or reference

### **Description**

#### **Rule Definition**

*A cast shall not remove any const or volatile qualification from the type of a pointer or reference.*

#### **Message in Report**

A cast shall not remove any const or volatile qualification from the type of a pointer or reference.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-2-6

A cast shall not convert a pointer to a function to any other pointer type, including a pointer to function type

### Description

#### Rule Definition

*A cast shall not convert a pointer to a function to any other pointer type, including a pointer to function type.*

#### Message in Report

A cast shall not convert a pointer to a function to any other pointer type, including a pointer to function type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-2-7

An object with pointer type shall not be converted to an unrelated pointer type, either directly or indirectly

### Description

#### Rule Definition

*An object with pointer type shall not be converted to an unrelated pointer type, either directly or indirectly.*

#### Polyspace Specification

The checker flags all pointer conversions including between a pointer to a `struct` object and a pointer to the first member of the same `struct` type.

Indirect conversions from a pointer to non-pointer type are not detected.

#### Message in Report

An object with pointer type shall not be converted to an unrelated pointer type, either directly or indirectly.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-2-8**

An object with integer type or pointer to void type shall not be converted to an object with pointer type

### **Description**

#### **Rule Definition**

*An object with integer type or pointer to void type shall not be converted to an object with pointer type.*

#### **Polyspace Specification**

The checker allows an exception on zero constants.

Objects with pointer type include objects with pointer-to-function type.

#### **Message in Report**

An object with integer type or pointer to void type shall not be converted to an object with pointer type.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-2-9

A cast should not convert a pointer type to an integral type

### Description

#### Rule Definition

*A cast should not convert a pointer type to an integral type.*

#### Message in Report

A cast should not convert a pointer type to an integral type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Advisory

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-2-10**

The increment ( ++ ) and decrement ( -- ) operators should not be mixed with other operators in an expression

### **Description**

#### **Rule Definition**

*The increment ( ++ ) and decrement ( -- ) operators should not be mixed with other operators in an expression.*

#### **Message in Report**

The increment ( ++ ) and decrement ( -- ) operators should not be mixed with other operators in an expression.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-2-11

The comma operator, && operator and the || operator shall not be overloaded

### Description

#### Rule Definition

*The comma operator, && operator and the || operator shall not be overloaded.*

#### Message in Report

The comma operator, && operator and the || operator shall not be overloaded.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-2-12**

An identifier with array type passed as a function argument shall not decay to a pointer

### **Description**

#### **Rule Definition**

*An identifier with array type passed as a function argument shall not decay to a pointer.*

#### **Message in Report**

An identifier with array type passed as a function argument shall not decay to a pointer.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-3-1

Each operand of the ! operator, the logical && or the logical || operators shall have type bool

### Description

#### Rule Definition

*Each operand of the ! operator, the logical && or the logical || operators shall have type bool.*

#### Message in Report

Each operand of the ! operator, the logical && or the logical || operators shall have type bool.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-3-2**

The unary minus operator shall not be applied to an expression whose underlying type is unsigned

### **Description**

#### **Rule Definition**

*The unary minus operator shall not be applied to an expression whose underlying type is unsigned.*

#### **Message in Report**

The unary minus operator shall not be applied to an expression whose underlying type is unsigned.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-3-3

The unary & operator shall not be overloaded

### Description

#### Rule Definition

*The unary & operator shall not be overloaded.*

#### Message in Report

The unary & operator shall not be overloaded.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-3-4**

Evaluation of the operand to the sizeof operator shall not contain side effects

### **Description**

#### **Rule Definition**

*Evaluation of the operand to the sizeof operator shall not contain side effects.*

#### **Polyspace Specification**

The checker does not show a warning on volatile accesses and function calls

#### **Message in Report**

Evaluation of the operand to the sizeof operator shall not contain side effects.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 5-8-1

The right hand operand of a shift operator shall lie between zero and one less than the width in bits of the underlying type of the left hand operand

### Description

#### Rule Definition

*The right hand operand of a shift operator shall lie between zero and one less than the width in bits of the underlying type of the left hand operand.*

#### Message in Report

The right hand operand of a shift operator shall lie between zero and one less than the width in bits of the underlying type of the left hand operand.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-14-1**

The right hand operand of a logical && or || operator shall not contain side effects

### **Description**

#### **Rule Definition**

*The right hand operand of a logical && or || operator shall not contain side effects.*

#### **Polyspace Specification**

The checker does not show a warning on volatile accesses and function calls.

#### **Message in Report**

The right hand operand of a logical && or || operator shall not contain side effects.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

# MISRA C++:2008 Rule 5-18-1

The comma operator shall not be used

## Description

### Rule Definition

*The comma operator shall not be used.*

### Message in Report

The comma operator shall not be used.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 5-19-1**

Evaluation of constant unsigned integer expressions should not lead to wrap-around

### **Description**

#### **Rule Definition**

*Evaluation of constant unsigned integer expressions should not lead to wrap-around.*

#### **Message in Report**

Evaluation of constant unsigned integer expressions should not lead to wrap-around.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Expressions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-2-1

Assignment operators shall not be used in sub-expressions

### Description

#### Rule Definition

*Assignment operators shall not be used in sub-expressions.*

#### Message in Report

Assignment operators shall not be used in sub-expressions.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-2-2**

Floating-point expressions shall not be directly or indirectly tested for equality or inequality

### **Description**

#### **Rule Definition**

*Floating-point expressions shall not be directly or indirectly tested for equality or inequality.*

#### **Message in Report**

Floating-point expressions shall not be directly or indirectly tested for equality or inequality.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-2-3

Before preprocessing, a null statement shall only occur on a line by itself; it may be followed by a comment, provided that the first character following the null statement is a white - space character

### Description

#### Rule Definition

*Before preprocessing, a null statement shall only occur on a line by itself; it may be followed by a comment, provided that the first character following the null statement is a white - space character.*

#### Message in Report

Before preprocessing, a null statement shall only occur on a line by itself; it may be followed by a comment, provided that the first character following the null statement is a white - space character.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-3-1**

The statement forming the body of a switch, while, do while or for statement shall be a compound statement

### **Description**

#### **Rule Definition**

*The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement.*

#### **Message in Report**

The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-4-1

An `if ( condition )` construct shall be followed by a compound statement. The `else` keyword shall be followed by either a compound statement, or another `if` statement.

### Description

#### Rule Definition

*An `if ( condition )` construct shall be followed by a compound statement. The `else` keyword shall be followed by either a compound statement, or another `if` statement.*

#### Message in Report

An `if ( condition )` construct shall be followed by a compound statement. The `else` keyword shall be followed by either a compound statement, or another `if` statement.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-4-2**

All if else if constructs shall be terminated with an else clause

### **Description**

#### **Rule Definition**

*All if ... else if constructs shall be terminated with an else clause.*

#### **Message in Report**

All if ... else if constructs shall be terminated with an else clause.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-4-3

A switch statement shall be a well-formed switch statement

### Description

#### Rule Definition

*A switch statement shall be a well-formed switch statement.*

#### Polyspace Specification

The checker considers return statements as jump statements and does not allow them in the switch block.

#### Message in Report

A switch statement shall be a well-formed switch statement.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-4-4**

A switch-label shall only be used when the most closely-enclosing compound statement is the body of a switch statement

### **Description**

#### **Rule Definition**

*A switch-label shall only be used when the most closely-enclosing compound statement is the body of a switch statement.*

#### **Message in Report**

A switch-label shall only be used when the most closely-enclosing compound statement is the body of a switch statement.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-4-5

An unconditional throw or break statement shall terminate every non - empty switch-clause

### Description

#### Rule Definition

*An unconditional throw or break statement shall terminate every non - empty switch-clause.*

#### Message in Report

An unconditional throw or break statement shall terminate every non - empty switch-clause.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-4-6**

The final clause of a switch statement shall be the default-clause

### **Description**

#### **Rule Definition**

*The final clause of a switch statement shall be the default-clause.*

#### **Message in Report**

The final clause of a switch statement shall be the default-clause.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-4-7

The condition of a switch statement shall not have bool type

### Description

#### Rule Definition

*The condition of a switch statement shall not have bool type.*

#### Message in Report

The condition of a switch statement shall not have bool type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-4-8**

Every switch statement shall have at least one case-clause

### **Description**

#### **Rule Definition**

*Every switch statement shall have at least one case-clause.*

#### **Message in Report**

Every switch statement shall have at least one case-clause.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-5-1

A for loop shall contain a single loop-counter which shall not have floating type

### Description

#### Rule Definition

*A for loop shall contain a single loop-counter which shall not have floating type.*

#### Message in Report

A for loop shall contain a single loop-counter which shall not have floating type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-5-2

If loop-counter is not modified by -- or ++, then, within condition, the loop-counter shall only be used as an operand to <=, <, > or >=

### Description

#### Rule Definition

*If loop-counter is not modified by -- or ++, then, within condition, the loop-counter shall only be used as an operand to <=, <, > or >=.*

#### Message in Report

If loop-counter is not modified by -- or ++, then, within condition, the loop-counter shall only be used as an operand to <=, <, > or >=.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-5-3

The loop-counter shall not be modified within condition or statement

### Description

#### Rule Definition

*The loop-counter shall not be modified within condition or statement.*

#### Rationale

The for loop has a specific syntax for modifying the loop counter. A code reviewer expects modification using that syntax. Modifying the loop counter elsewhere can make the code harder to review.

#### Polyspace Specification

The checker flags modification of a for loop counter in the loop body or the loop condition.

#### Message in Report

The loop-counter shall not be modified within condition or statement.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-5-4

The loop-counter shall be modified by one of: --, ++, -=n, or +=n ; where n remains constant for the duration of the loop

### Description

#### Rule Definition

*The loop-counter shall be modified by one of: --, ++, -=n, or +=n ; where n remains constant for the duration of the loop.*

#### Message in Report

The loop-counter shall be modified by one of: --, ++, -=n, or +=n ; where n remains constant for the duration of the loop.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-5-5**

A loop-control-variable other than the loop-counter shall not be modified within condition or expression

### **Description**

#### **Rule Definition**

*A loop-control-variable other than the loop-counter shall not be modified within condition or expression.*

#### **Message in Report**

A loop-control-variable other than the loop-counter shall not be modified within condition or expression.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-5-6

A loop-control-variable other than the loop-counter which is modified in statement shall have type bool

### Description

#### Rule Definition

*A loop-control-variable other than the loop-counter which is modified in statement shall have type bool.*

#### Message in Report

A loop-control-variable other than the loop-counter which is modified in statement shall have type bool.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-6-1**

Any label referenced by a goto statement shall be declared in the same block, or in a block enclosing the goto statement

### **Description**

#### **Rule Definition**

*Any label referenced by a goto statement shall be declared in the same block, or in a block enclosing the goto statement.*

#### **Message in Report**

Any label referenced by a goto statement shall be declared in the same block, or in a block enclosing the goto statement.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-6-2

The goto statement shall jump to a label declared later in the same function body

### Description

#### Rule Definition

*The goto statement shall jump to a label declared later in the same function body.*

#### Message in Report

The goto statement shall jump to a label declared later in the same function body.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 6-6-3**

The continue statement shall only be used within a well-formed for loop

### **Description**

#### **Rule Definition**

*The continue statement shall only be used within a well-formed for loop.*

#### **Polyspace Specification**

The checker flags the use of continue statements in:

- for loops that are not well-formed, that is, loops that violate rules 6-5-x.
- while loops.

#### **Message in Report**

The continue statement shall only be used within a well-formed for loop.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-6-4

For any iteration statement there shall be no more than one break or goto statement used for loop termination

### Description

#### Rule Definition

*For any iteration statement there shall be no more than one break or goto statement used for loop termination.*

#### Message in Report

For any iteration statement there shall be no more than one break or goto statement used for loop termination.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 6-6-5

A function shall have a single point of exit at the end of the function

### Description

#### Rule Definition

*A function shall have a single point of exit at the end of the function.*

#### Rationale

This rule requires that a `return` statement must occur as the last statement in the function body. Otherwise, the following issues can occur:

- Code following a `return` statement can be unintentionally omitted.
- If a function that modifies some of its arguments has early `return` statements, when reading the code, it is not immediately clear which modifications actually occur.

#### Polyspace Specification

The checker flags these situations:

- A function has more than one `return` statement.
- A non-`void` function has one `return` statement only but the `return` statement is not the last statement in the function.

A `void` function need not have a `return` statement. If a `return` statement exists, it need not be the last statement in the function.

#### Message in Report

A function shall have a single point of exit at the end of the function.

## **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Statements

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 7-1-1**

A variable which is not modified shall be const qualified

### **Description**

#### **Rule Definition**

*A variable which is not modified shall be const qualified.*

#### **Polyspace Specification**

The checker flags function parameters or local variables that are not const-qualified but never modified in the function body. Function parameters of integer, float, enum and boolean types are not flagged.

If a variable is passed to another function by reference or pointers, the checker assumes that the variable can be modified. These variables are not flagged.

#### **Message in Report**

A variable which is not modified shall be const qualified.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarations

**Category:** Required

**Introduced in R2018a**

## MISRA C++:2008 Rule 7-1-2

A pointer or reference parameter in a function shall be declared as pointer to const or reference to const if the corresponding object is not modified

### Description

#### Rule Definition

*A pointer or reference parameter in a function shall be declared as pointer to const or reference to const if the corresponding object is not modified.*

#### Polyspace Specification

The checker flags pointers where the underlying object is not const-qualified but never modified in the function body.

If a variable is passed to another function by reference or pointers, the checker assumes that the variable can be modified. Pointers that point to these variables are not flagged.

#### Message in Report

A pointer or reference parameter in a function shall be declared as pointer to const or reference to const if the corresponding object is not modified.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarations

**Category:** Required

**Introduced in R2018a**

## MISRA C++:2008 Rule 7-3-1

The global namespace shall only contain main, namespace declarations and extern "C" declarations

### Description

#### Rule Definition

*The global namespace shall only contain main, namespace declarations and extern "C" declarations.*

#### Message in Report

The global namespace shall only contain main, namespace declarations and extern "C" declarations.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to "Coding Rule Violations Not Displayed".

### Check Information

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 7-3-2**

The identifier main shall not be used for a function other than the global function main

### **Description**

#### **Rule Definition**

*The identifier main shall not be used for a function other than the global function main.*

#### **Message in Report**

The identifier main shall not be used for a function other than the global function main.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 7-3-3

There shall be no unnamed namespaces in header files

### Description

#### Rule Definition

*There shall be no unnamed namespaces in header files.*

#### Message in Report

There shall be no unnamed namespaces in header files.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 7-3-4**

using-directives shall not be used

### **Description**

#### **Rule Definition**

*using-directives shall not be used.*

#### **Message in Report**

using-directives shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 7-3-5

Multiple declarations for an identifier in the same namespace shall not straddle a using-declaration for that identifier

### Description

#### Rule Definition

*Multiple declarations for an identifier in the same namespace shall not straddle a using-declaration for that identifier.*

#### Message in Report

Multiple declarations for an identifier in the same namespace shall not straddle a using-declaration for that identifier.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 7-3-6**

using-directives and using-declarations (excluding class scope or function scope using-declarations) shall not be used in header files

### **Description**

#### **Rule Definition**

*using-directives and using-declarations (excluding class scope or function scope using-declarations) shall not be used in header files.*

#### **Message in Report**

using-directives and using-declarations (excluding class scope or function scope using-declarations) shall not be used in header files.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 7-4-2

Assembler instructions shall only be introduced using the asm declaration

### Description

#### Rule Definition

*Assembler instructions shall only be introduced using the asm declaration.*

#### Message in Report

Assembler instructions shall only be introduced using the asm declaration.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 7-4-3**

Assembly language shall be encapsulated and isolated

### **Description**

#### **Rule Definition**

*Assembly language shall be encapsulated and isolated.*

#### **Message in Report**

Assembly language shall be encapsulated and isolated.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 7-5-1

A function shall not return a reference or a pointer to an automatic variable (including parameters), defined within the function

### Description

#### Rule Definition

*A function shall not return a reference or a pointer to an automatic variable (including parameters), defined within the function.*

#### Message in Report

A function shall not return a reference or a pointer to an automatic variable (including parameters), defined within the function.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 7-5-2**

The address of an object with automatic storage shall not be assigned to another object that may persist after the first object has ceased to exist

### **Description**

#### **Rule Definition**

*The address of an object with automatic storage shall not be assigned to another object that may persist after the first object has ceased to exist.*

#### **Message in Report**

The address of an object with automatic storage shall not be assigned to another object that may persist after the first object has ceased to exist.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 7-5-3

A function shall not return a reference or a pointer to a parameter that is passed by reference or const reference

### Description

#### Rule Definition

*A function shall not return a reference or a pointer to a parameter that is passed by reference or const reference.*

#### Message in Report

A function shall not return a reference or a pointer to a parameter that is passed by reference or const reference.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarations

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 7-5-4**

Functions should not call themselves, either directly or indirectly

### **Description**

#### **Rule Definition**

*Functions should not call themselves, either directly or indirectly.*

#### **Message in Report**

Functions should not call themselves, either directly or indirectly.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarations

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 8-0-1

An init-declarator-list or a member-declarator-list shall consist of a single init-declarator or member-declarator respectively

### Description

#### Rule Definition

*An init-declarator-list or a member-declarator-list shall consist of a single init-declarator or member-declarator respectively.*

#### Message in Report

An init-declarator-list or a member-declarator-list shall consist of a single init-declarator or member-declarator respectively.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 8-3-1**

Parameters in an overriding virtual function shall either use the same default arguments as the function they override, or else shall not specify any default arguments

### **Description**

#### **Rule Definition**

*Parameters in an overriding virtual function shall either use the same default arguments as the function they override, or else shall not specify any default arguments.*

#### **Message in Report**

Parameters in an overriding virtual function shall either use the same default arguments as the function they override, or else shall not specify any default arguments.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 8-4-1**

Functions shall not be defined using the ellipsis notation

### **Description**

#### **Rule Definition**

*Functions shall not be defined using the ellipsis notation.*

#### **Message in Report**

Functions shall not be defined using the ellipsis notation.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 8-4-2**

The identifiers used for the parameters in a re-declaration of a function shall be identical to those in the declaration

### **Description**

#### **Rule Definition**

*The identifiers used for the parameters in a re-declaration of a function shall be identical to those in the declaration.*

#### **Message in Report**

The identifiers used for the parameters in a re-declaration of a function shall be identical to those in the declaration.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 8-4-3

All exit paths from a function with non- void return type shall have an explicit return statement with an expression

### Description

#### Rule Definition

*All exit paths from a function with non- void return type shall have an explicit return statement with an expression.*

#### Message in Report

All exit paths from a function with non- void return type shall have an explicit return statement with an expression.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 8-4-4**

A function identifier shall either be used to call the function or it shall be preceded by &

### **Description**

#### **Rule Definition**

*A function identifier shall either be used to call the function or it shall be preceded by &.*

#### **Message in Report**

A function identifier shall either be used to call the function or it shall be preceded by &.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

# MISRA C++:2008 Rule 8-5-1

All variables shall have a defined value before they are used

## Description

### Rule Definition

*All variables shall have a defined value before they are used.*

### Message in Report

All variables shall have a defined value before they are used.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 8-5-2**

Braces shall be used to indicate and match the structure in the non- zero initialization of arrays and structures

### **Description**

#### **Rule Definition**

*Braces shall be used to indicate and match the structure in the non- zero initialization of arrays and structures.*

#### **Message in Report**

Braces shall be used to indicate and match the structure in the non- zero initialization of arrays and structures.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 8-5-3

In an enumerator list, the = construct shall not be used to explicitly initialize members other than the first, unless all items are explicitly initialized

### Description

#### Rule Definition

*In an enumerator list, the = construct shall not be used to explicitly initialize members other than the first, unless all items are explicitly initialized.*

#### Message in Report

In an enumerator list, the = construct shall not be used to explicitly initialize members other than the first, unless all items are explicitly initialized.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Declarators

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 9-3-1

const member functions shall not return non-const pointers or references to class-data

### Description

#### Rule Definition

*const member functions shall not return non-const pointers or references to class-data.*

#### Polyspace Specification

The checker flags a rule violation only if a `const` member function returns a `non-const` reference to a nonstatic data member. The rule does not apply to static data members.

#### Message in Report

const member functions shall not return non-const pointers or references to class-data.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Classes

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 9-3-2

Member functions shall not return non-const handles to class-data

### Description

#### Rule Definition

*Member functions shall not return non-const handles to class-data.*

#### Polyspace Specification

The checker flags a rule violation only if a `const` member function returns a `non-const` reference to a nonstatic data member. The rule does not apply to static data members.

#### Message in Report

Member functions shall not return non-const handles to class-data.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Classes

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 9-3-3

If a member function can be made static then it shall be made static, otherwise if it can be made const then it shall be made const

### Description

#### Rule Definition

*If a member function can be made static then it shall be made static, otherwise if it can be made const then it shall be made const.*

#### Polyspace Specification

The checker flags member functions that are not declared static but do not access a data member of the class. Such a function can be potentially declared static.

The checker flags member functions that are not declared const but do not modify a data member of the class. Such a function can be potentially declared const.

#### Message in Report

If a member function can be made static then it shall be made static, otherwise if it can be made const then it shall be made const.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Classes

**Category:** Required

**Introduced in R2018a**

## **MISRA C++:2008 Rule 9-5-1**

Unions shall not be used

### **Description**

#### **Rule Definition**

*Unions shall not be used.*

#### **Message in Report**

Unions shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Classes

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 9-6-2

Bit-fields shall be either bool type or an explicitly unsigned or signed integral type

### Description

#### Rule Definition

*Bit-fields shall be either bool type or an explicitly unsigned or signed integral type.*

#### Message in Report

Bit-fields shall be either bool type or an explicitly unsigned or signed integral type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Classes

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 9-6-3**

Bit-fields shall not have enum type

### **Description**

#### **Rule Definition**

*Bit-fields shall not have enum type.*

#### **Message in Report**

Bit-fields shall not have enum type.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Classes

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 9-6-4

Named bit-fields with signed integer type shall have a length of more than one bit

### Description

#### Rule Definition

*Named bit-fields with signed integer type shall have a length of more than one bit.*

#### Message in Report

Named bit-fields with signed integer type shall have a length of more than one bit.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Classes

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 10-1-1

Classes should not be derived from virtual bases

### Description

#### Rule Definition

*Classes should not be derived from virtual bases.*

#### Rationale

The use of virtual bases can lead to many confusing behaviors.

For instance, in an inheritance hierarchy involving a virtual base, the most derived class calls the constructor of the virtual base. Intermediate calls to the virtual base constructor are ignored.

#### Message in Report

Classes should not be derived from virtual bases.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of Virtual Bases

```
class Base {};  
class Intermediate: public virtual Base {}; //Noncompliant  
class Final: public Intermediate {};
```

In this example, the rule checker raises a violation when the `Intermediate` class is derived from the class `Base` with the `virtual` keyword.

The following behavior can be a potential source of confusion. When you create an object of type `Final`, the constructor of `Final` directly calls the constructor of `Base`. Any call to the `Base` constructor from the `Intermediate` constructor are ignored. You might see unexpected results if you do not take into account this behavior.

## Check Information

**Group:** Derived Classes

**Category:** Advisory

## See Also

MISRA C++:2008 Rule 10-1-2 | MISRA C++:2008 Rule 10-1-2

**Introduced in R2013b**

## MISRA C++:2008 Rule 10-1-2

A base class shall only be declared virtual if it is used in a diamond hierarchy

### Description

#### Rule Definition

*A base class shall only be declared virtual if it is used in a diamond hierarchy.*

#### Rationale

This rule is less restrictive than MISRA C++:2008 Rule 10-1-1. Rule 10-1-1 forbids the use of a virtual base anywhere in your code because a virtual base can lead to potentially confusing behavior.

Rule 10-1-2 allows the use of virtual bases in the one situation where they are useful, that is, as a common base class in diamond hierarchies.

For instance, the following diamond hierarchy violates rule 10-1-1 but not rule 10-1-2.

```
class Base {};  
class Intermediate1: public virtual Base {};  
class Intermediate2: public virtual Base {};  
class Final: public Intermediate1, public Intermediate2 {};
```

#### Message in Report

A base class shall only be declared virtual if it is used in a diamond hierarchy.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Derived Classes

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 10-1-3

An accessible base class shall not be both virtual and non-virtual in the same hierarchy

### Description

#### Rule Definition

*An accessible base class shall not be both virtual and non-virtual in the same hierarchy.*

#### Rationale

The checker flags situations where the same class is inherited as a virtual base class and a non-virtual base class in the same derived class. These situations defeat the purpose of virtual inheritance and causes multiple copies of the base class sub-object in the derived class object.

#### Message in Report

An accessible base class shall not be both virtual and non-virtual in the same hierarchy.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Base Class Both Virtual and Non-Virtual in Same Hierarchy

```
class Base {};  
class Intermediate1: virtual public Base {};  
class Intermediate2: virtual public Base {};
```

```
class Intermediate3: public Base {};  
class Final: public Intermediate1, Intermediate2, Intermediate3 {}; //Noncompliant
```

In this example, the class `Base` is inherited in `Final` both as a virtual and non-virtual base class. The `Final` object contains at least two copies of a `Base` sub-object.

## Check Information

**Group:** Derived Classes

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 10-2-1**

All accessible entity names within a multiple inheritance hierarchy should be unique

### **Description**

#### **Rule Definition**

*All accessible entity names within a multiple inheritance hierarchy should be unique.*

#### **Polyspace Specification**

The checker does not perform a detection between entities of different kinds, for instance, member functions against data members.

#### **Message in Report**

All accessible entity names within a multiple inheritance hierarchy should be unique.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Derived Classes

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 10-3-1

There shall be no more than one definition of each virtual function on each path through the inheritance hierarchy

### Description

#### Rule Definition

*There shall be no more than one definition of each virtual function on each path through the inheritance hierarchy.*

#### Rationale

The checker flags virtual member functions that have multiple definitions on the same path in an inheritance hierarchy. If a function is defined multiple times, it can be ambiguous which implementation is used in a given function call.

#### Polyspace Specification

The checker also raises a violation if a base class member function is redefined in the derived class without the `virtual` keyword.

#### Message in Report

There shall be no more than one definition of each virtual function on each path through the inheritance hierarchy.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Virtual Function Redefined in Derived Class

```
class Base {
    public:
        virtual void foo() {
        }
};

class Intermediate1: public virtual Base {
    public:
        virtual void foo() { //Noncompliant
        }
};

class Intermediate2: public virtual Base {
    public:
        void bar() {
            foo(); // Calls Base::foo()
        }
};

class Final: public Intermediate1, public Intermediate2 {
};

void main() {
    Intermediate2 intermediate2Obj;
    intermediate2Obj.bar(); // Calls Base::foo()
    Final finalObj;
    finalObj.bar(); //Calls Intermediate1::foo()
                    //but you might expect Base::foo()
}
```

In this example, the virtual function `foo` is defined in the base class `Base` and also in the derived class `Intermediate1`.

A potential source of confusion can be the following. The class `Final` derives from `Intermediate1` and also derives from `Base` through another path using `Intermediate2`.

- When an `Intermediate2` object calls the function `bar` that calls the function `foo`, the implementation of `foo` in `Base` is called. An `Intermediate2` object does not know of the implementation in `Intermediate1`.
- However, when a `Final` object calls the same function `bar` that calls the function `foo`, the implementation of `foo` in `Intermediate1` is called because of dominance of the more derived class.

You might see unexpected results if you do not take this behavior into account.

To prevent this issue, declare a function as pure virtual in the base class. For instance, you can declare the class `Base` as follows:

```
class Base {
    public:
        virtual void foo()=0;
};

void Base::foo() {
    //You can still define Base::foo()
}
```

## Check Information

**Group:** Derived Classes

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 10-3-2**

Each overriding virtual function shall be declared with the virtual keyword

### **Description**

#### **Rule Definition**

*Each overriding virtual function shall be declared with the virtual keyword.*

#### **Message in Report**

Each overriding virtual function shall be declared with the virtual keyword.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Derived Classes

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 10-3-3

A virtual function shall only be overridden by a pure virtual function if it is itself declared as pure virtual

### Description

#### Rule Definition

*A virtual function shall only be overridden by a pure virtual function if it is itself declared as pure virtual.*

#### Message in Report

A virtual function shall only be overridden by a pure virtual function if it is itself declared as pure virtual.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Derived Classes

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 11-0-1**

Member data in non- POD class types shall be private

### **Description**

#### **Rule Definition**

*Member data in non- POD class types shall be private.*

#### **Message in Report**

Member data in non- POD class types shall be private.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Member Access Control

**Category:** Required

**Introduced in R2013b**

# MISRA C++:2008 Rule 12-1-1

An object's dynamic type shall not be used from the body of its constructor or destructor

## Description

### Rule Definition

*An object's dynamic type shall not be used from the body of its constructor or destructor.*

### Message in Report

An object's dynamic type shall not be used from the body of its constructor or destructor.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Special Member Functions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 12-1-2**

All constructors of a class should explicitly call a constructor for all of its immediate base classes and all virtual base classes

### **Description**

#### **Rule Definition**

*All constructors of a class should explicitly call a constructor for all of its immediate base classes and all virtual base classes.*

#### **Message in Report**

All constructors of a class should explicitly call a constructor for all of its immediate base classes and all virtual base classes.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### **Check Information**

**Group:** Special Member Functions

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 12-1-3

All constructors that are callable with a single argument of fundamental type shall be declared explicit

### Description

#### Rule Definition

*All constructors that are callable with a single argument of fundamental type shall be declared explicit.*

#### Message in Report

All constructors that are callable with a single argument of fundamental type shall be declared explicit.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Special Member Functions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 12-8-1**

A copy constructor shall only initialize its base classes and the non- static members of the class of which it is a member

### **Description**

#### **Rule Definition**

*A copy constructor shall only initialize its base classes and the non- static members of the class of which it is a member.*

#### **Message in Report**

A copy constructor shall only initialize its base classes and the non- static members of the class of which it is a member.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Special Member Functions

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 12-8-2

The copy assignment operator shall be declared protected or private in an abstract class

### Description

#### Rule Definition

*The copy assignment operator shall be declared protected or private in an abstract class.*

#### Message in Report

The copy assignment operator shall be declared protected or private in an abstract class.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Special Member Functions

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 14-5-2**

A copy constructor shall be declared when there is a template constructor with a single parameter that is a generic parameter

### **Description**

#### **Rule Definition**

*A copy constructor shall be declared when there is a template constructor with a single parameter that is a generic parameter.*

#### **Message in Report**

A copy constructor shall be declared when there is a template constructor with a single parameter that is a generic parameter.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Templates

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 14-5-3

A copy assignment operator shall be declared when there is a template assignment operator with a parameter that is a generic parameter

### Description

#### Rule Definition

*A copy assignment operator shall be declared when there is a template assignment operator with a parameter that is a generic parameter.*

#### Message in Report

A copy assignment operator shall be declared when there is a template assignment operator with a parameter that is a generic parameter.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Templates

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 14-6-1**

In a class template with a dependent base, any name that may be found in that dependent base shall be referred to using a qualified-id or this->

### **Description**

#### **Rule Definition**

*In a class template with a dependent base, any name that may be found in that dependent base shall be referred to using a qualified-id or this->*

#### **Message in Report**

In a class template with a dependent base, any name that may be found in that dependent base shall be referred to using a qualified-id or this->

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Templates

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 14-6-2

The function chosen by overload resolution shall resolve to a function declared previously in the translation unit

### Description

#### Rule Definition

*The function chosen by overload resolution shall resolve to a function declared previously in the translation unit.*

#### Message in Report

The function chosen by overload resolution shall resolve to a function declared previously in the translation unit.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Templates

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 14-7-3**

All partial and explicit specializations for a template shall be declared in the same file as the declaration of their primary template

### **Description**

#### **Rule Definition**

*All partial and explicit specializations for a template shall be declared in the same file as the declaration of their primary template.*

#### **Message in Report**

All partial and explicit specializations for a template shall be declared in the same file as the declaration of their primary template.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Templates

**Category:** Required

**Introduced in R2013b**

# MISRA C++:2008 Rule 14-8-1

Overloaded function templates shall not be explicitly specialized

## Description

### Rule Definition

*Overloaded function templates shall not be explicitly specialized.*

### Polyspace Specification

The checker first checks within file scope to find overloads. The checker later looks for call to a specialized template function later. As a result, the checker flags all specializations of overloaded templates even if overloading occurs after the call.

### Message in Report

Overloaded function templates shall not be explicitly specialized.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Templates

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 14-8-2**

The viable function set for a function call should either contain no function specializations, or only contain function specializations

### **Description**

#### **Rule Definition**

*The viable function set for a function call should either contain no function specializations, or only contain function specializations.*

#### **Message in Report**

The viable function set for a function call should either contain no function specializations, or only contain function specializations.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Templates

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 15-0-2

An exception object should not have pointer type

### Description

#### Rule Definition

*An exception object should not have pointer type.*

#### Polyspace Specification

The checker does not detect NULL (see rule 15-1-2).

#### Message in Report

An exception object should not have pointer type.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Exception Handling

**Category:** Advisory

**Introduced in R2013b**

## **MISRA C++:2008 Rule 15-0-3**

Control shall not be transferred into a try or catch block using a goto or a switch statement

### **Description**

#### **Rule Definition**

*Control shall not be transferred into a try or catch block using a goto or a switch statement.*

#### **Message in Report**

Control shall not be transferred into a try or catch block using a goto or a switch statement.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 15-1-2**

NULL shall not be thrown explicitly

### **Description**

#### **Rule Definition**

*NULL shall not be thrown explicitly.*

#### **Message in Report**

NULL shall not be thrown explicitly.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 15-1-3**

An empty throw (throw;) shall only be used in the compound- statement of a catch handler

### **Description**

#### **Rule Definition**

*An empty throw (throw;) shall only be used in the compound- statement of a catch handler.*

#### **Message in Report**

An empty throw (throw;) shall only be used in the compound- statement of a catch handler.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 15-3-2

There should be at least one exception handler to catch all otherwise unhandled exceptions

### Description

### Rule Definition

*There should be at least one exception handler to catch all otherwise unhandled exceptions.*

### Polyspace Specification

The checker shows a violation if there is no `try/catch` in the `main` function or the `catch` does not handle all exceptions (with ellipsis `...`). The rule is not checked if a `main` function does not exist.

The checker does not determine if an exception of an unhandled type actually propagates to `main`.

Bug Finder and Code Prover check this coding rule differently. The analyses can produce different results.

### Message in Report

There should be at least one exception handler to catch all otherwise unhandled exceptions.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Exception Handling

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 15-3-3

Handlers of a function-try-block implementation of a class constructor or destructor shall not reference non-static members from this class or its bases

### Description

#### Rule Definition

*Handlers of a function-try-block implementation of a class constructor or destructor shall not reference non-static members from this class or its bases.*

#### Message in Report

Handlers of a function-try-block implementation of a class constructor or destructor shall not reference non-static members from this class or its bases.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 15-3-5**

A class type exception shall always be caught by reference

### **Description**

#### **Rule Definition**

*A class type exception shall always be caught by reference.*

#### **Message in Report**

A class type exception shall always be caught by reference.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 15-3-6

Where multiple handlers are provided in a single try-catch statement or function-try-block for a derived class and some or all of its bases, the handlers shall be ordered most-derived to base class

### Description

#### Rule Definition

*Where multiple handlers are provided in a single try-catch statement or function-try-block for a derived class and some or all of its bases, the handlers shall be ordered most-derived to base class.*

#### Message in Report

Where multiple handlers are provided in a single try-catch statement or function-try-block for a derived class and some or all of its bases, the handlers shall be ordered most-derived to base class.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 15-3-7**

Where multiple handlers are provided in a single try-catch statement or function-try-block, any ellipsis (catch-all) handler shall occur last

### **Description**

#### **Rule Definition**

*Where multiple handlers are provided in a single try-catch statement or function-try-block, any ellipsis (catch-all) handler shall occur last.*

#### **Message in Report**

Where multiple handlers are provided in a single try-catch statement or function-try-block, any ellipsis (catch-all) handler shall occur last.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 15-4-1

If a function is declared with an exception-specification, then all declarations of the same function (in other translation units) shall be declared with the same set of type-ids

### Description

#### Rule Definition

*If a function is declared with an exception-specification, then all declarations of the same function (in other translation units) shall be declared with the same set of type-ids.*

#### Message in Report

If a function is declared with an exception-specification, then all declarations of the same function (in other translation units) shall be declared with the same set of type-ids.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 15-5-1**

A class destructor shall not exit with an exception

### **Description**

#### **Rule Definition**

*A class destructor shall not exit with an exception.*

#### **Polyspace Specification**

The checker limits detection to `throw` statements that are in the body of the destructor. If the destructor calls another function, the checker does not detect if that function throws an exception.

The checker does not detect these situations:

- A `catch` statement does not catch exceptions of all types that are thrown.

The checker considers the presence of a `catch` statement corresponding to a `try` block as indication that an exception is caught.

- `throw` statements inside `catch` blocks

#### **Message in Report**

A class destructor shall not exit with an exception.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## **Check Information**

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 15-5-2

Where a function's declaration includes an exception-specification, the function shall only be capable of throwing exceptions of the indicated type(s)

### Description

#### Rule Definition

*Where a function's declaration includes an exception-specification, the function shall only be capable of throwing exceptions of the indicated type(s).*

#### Polyspace Specification

The checker limits detection to `throw` statements that are in the body of the function. If the function calls another function, the checker does not detect if the called function throws an exception.

The checker does not detect `throw` statements inside `catch` blocks.

#### Message in Report

Where a function's declaration includes an exception-specification, the function shall only be capable of throwing exceptions of the indicated type(s).

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Exception Handling

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 15-5-3**

The `terminate()` function shall not be called implicitly

### **Description**

#### **Rule Definition**

*The `terminate()` function shall not be called implicitly.*

#### **Polyspace Specification**

The checker flags these situations when the `terminate()` function can be called implicitly:

- An exception escapes uncaught. This also violates rule 15-3-2. For instance:
  - Before an exception is caught, it escapes through another function that throws an uncaught exception. For instance, a catch statement or exception handler invokes a copy constructor that throws an uncaught exception.
  - A throw expression with no operand rethrows an uncaught exception.
- A class destructor throws an exception. This also violates rule 15-5-1.

#### **Message in Report**

The `terminate()` function shall not be called implicitly.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### **Check Information**

**Group:** Exception Handling

**Category:** Required

**Introduced in R2018a**

## **MISRA C++:2008 Rule 16-0-1**

#include directives in a file shall only be preceded by other preprocessor directives or comments

### **Description**

#### **Rule Definition**

*#include directives in a file shall only be preceded by other preprocessor directives or comments.*

#### **Message in Report**

#include directives in a file shall only be preceded by other preprocessor directives or comments.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-0-2

Macros shall only be `#define 'd` or `#undef 'd` in the global namespace

### Description

#### Rule Definition

*Macros shall only be `#define 'd` or `#undef 'd` in the global namespace.*

#### Message in Report

Macros shall only be `#define 'd` or `#undef 'd` in the global namespace.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 16-0-3**

#undef shall not be used

### **Description**

#### **Rule Definition**

*#undef shall not be used.*

#### **Message in Report**

#undef shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-0-4

Function-like macros shall not be defined

### Description

#### Rule Definition

*Function-like macros shall not be defined.*

#### Message in Report

Function-like macros shall not be defined.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 16-0-5**

Arguments to a function-like macro shall not contain tokens that look like preprocessing directives

### **Description**

#### **Rule Definition**

*Arguments to a function-like macro shall not contain tokens that look like preprocessing directives.*

#### **Message in Report**

Arguments to a function-like macro shall not contain tokens that look like preprocessing directives.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-0-6

In the definition of a function-like macro, each instance of a parameter shall be enclosed in parentheses, unless it is used as the operand of # or ##

### Description

#### Rule Definition

*In the definition of a function-like macro, each instance of a parameter shall be enclosed in parentheses, unless it is used as the operand of # or ##.*

#### Message in Report

In the definition of a function-like macro, each instance of a parameter shall be enclosed in parentheses, unless it is used as the operand of # or ##.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-0-7

Undefined macro identifiers shall not be used in `#if` or `#elif` preprocessor directives, except as operands to the defined operator

### Description

#### Rule Definition

*Undefined macro identifiers shall not be used in `#if` or `#elif` preprocessor directives, except as operands to the defined operator.*

#### Message in Report

Undefined macro identifiers shall not be used in `#if` or `#elif` preprocessor directives, except as operands to the defined operator.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-0-8

If the # token appears as the first token on a line, then it shall be immediately followed by a preprocessing token

### Description

#### Rule Definition

*If the # token appears as the first token on a line, then it shall be immediately followed by a preprocessing token.*

#### Message in Report

If the # token appears as the first token on a line, then it shall be immediately followed by a preprocessing token.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

#### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 16-1-1**

The defined preprocessor operator shall only be used in one of the two standard forms

### **Description**

#### **Rule Definition**

*The defined preprocessor operator shall only be used in one of the two standard forms.*

#### **Message in Report**

The defined preprocessor operator shall only be used in one of the two standard forms.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-1-2

All `#else`, `#elif` and `#endif` preprocessor directives shall reside in the same file as the `#if` or `#ifdef` directive to which they are related

### Description

#### Rule Definition

*All `#else`, `#elif` and `#endif` preprocessor directives shall reside in the same file as the `#if` or `#ifdef` directive to which they are related.*

#### Message in Report

All `#else`, `#elif` and `#endif` preprocessor directives shall reside in the same file as the `#if` or `#ifdef` directive to which they are related.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-2-1

The preprocessor shall only be used for file inclusion and include guards

### Description

#### Rule Definition

*The preprocessor shall only be used for file inclusion and include guards.*

#### Polyspace Specification

The checker raises a violation if a `#define` is not in an include guard. The checker also flags `#ifndef`-s and `#define`-s in files that are not include files.

#### Message in Report

The preprocessor shall only be used for file inclusion and include guards.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-2-2

C++ macros shall only be used for: include guards, type qualifiers, or storage class specifiers

### Description

#### Rule Definition

*C++ macros shall only be used for: include guards, type qualifiers, or storage class specifiers.*

#### Message in Report

C++ macros shall only be used for: include guards, type qualifiers, or storage class specifiers.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 16-2-3**

Include guards shall be provided

### **Description**

#### **Rule Definition**

*Include guards shall be provided.*

#### **Message in Report**

Include guards shall be provided.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-2-4

The ', ", /\* or // characters shall not occur in a header file name

### Description

#### Rule Definition

*The ', ", /\* or // characters shall not occur in a header file name.*

#### Message in Report

The ', ", /\* or // characters shall not occur in a header file name.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 16-2-5**

The \ character should not occur in a header file name

### **Description**

#### **Rule Definition**

*The \ character should not occur in a header file name.*

#### **Message in Report**

The \ character should not occur in a header file name.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Preprocessing Directives

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-2-6

The `#include` directive shall be followed by either a `<filename>` or `"filename"` sequence

### Description

#### Rule Definition

*The `#include` directive shall be followed by either a `<filename>` or `"filename"` sequence.*

#### Message in Report

The `#include` directive shall be followed by either a `<filename>` or `"filename"` sequence.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 16-3-1**

There shall be at most one occurrence of the # or ## operators in a single macro definition

### **Description**

#### **Rule Definition**

*There shall be at most one occurrence of the # or ## operators in a single macro definition.*

#### **Message in Report**

There shall be at most one occurrence of the # or ## operators in a single macro definition.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Preprocessing Directives

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-3-2

The # and ## operators should not be used

### Description

#### Rule Definition

*The # and ## operators should not be used.*

#### Message in Report

The # and ## operators should not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Advisory

**Introduced in R2013b**

## MISRA C++:2008 Rule 16-6-1

All uses of the #pragma directive shall be documented

### Description

#### Rule Definition

*All uses of the #pragma directive shall be documented.*

#### Polyspace Specification

To check this rule, you must list the pragmas that are allowed in source files by using the option `Allowed pragmas (-allowed-pragmas)`. If Polyspace finds a pragma not in the allowed pragma list, a violation is raised.

#### Message in Report

All uses of the #pragma directive shall be documented.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Preprocessing Directives

**Category:** Document

**Introduced in R2016b**

# MISRA C++:2008 Rule 17-0-1

Reserved identifiers, macros and functions in the standard library shall not be defined, redefined or undefined

## Description

### Rule Definition

*Reserved identifiers, macros and functions in the standard library shall not be defined, redefined or undefined.*

### Message in Report

Reserved identifiers, macros and functions in the standard library shall not be defined, redefined or undefined.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Library Introduction

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 17-0-2**

The names of standard library macros and objects shall not be reused

### **Description**

#### **Rule Definition**

*The names of standard library macros and objects shall not be reused.*

#### **Message in Report**

The names of standard library macros and objects shall not be reused.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Library Introduction

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 17-0-3

The names of standard library functions shall not be overridden

### Description

#### Rule Definition

*The names of standard library functions shall not be overridden.*

#### Message in Report

The names of standard library functions shall not be overridden.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Library Introduction

**Category:** Required

**Introduced in R2018a**

## **MISRA C++:2008 Rule 17-0-5**

The setjmp macro and the longjmp function shall not be used

### **Description**

#### **Rule Definition**

*The setjmp macro and the longjmp function shall not be used.*

#### **Message in Report**

The setjmp macro and the longjmp function shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Library Introduction

**Category:** Required

**Introduced in R2013b**

# MISRA C++:2008 Rule 18-0-1

The C library shall not be used

## Description

### Rule Definition

*The C library shall not be used.*

### Message in Report

The C library shall not be used.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Language Support Library

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 18-0-2**

The library functions `atof`, `atoi` and `atol` from library `<cstdlib>` shall not be used

### **Description**

#### **Rule Definition**

*The library functions `atof`, `atoi` and `atol` from library `<cstdlib>` shall not be used.*

#### **Message in Report**

The library functions `atof`, `atoi` and `atol` from library `<cstdlib>` shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Language Support Library

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 18-0-3

The library functions `abort`, `exit`, `getenv` and `system` from library `<cstdlib>` shall not be used

### Description

#### Rule Definition

*The library functions `abort`, `exit`, `getenv` and `system` from library `<cstdlib>` shall not be used.*

#### Message in Report

The library functions `abort`, `exit`, `getenv` and `system` from library `<cstdlib>` shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Language Support Library

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 18-0-4**

The time handling functions of library <ctime> shall not be used

### **Description**

#### **Rule Definition**

*The time handling functions of library <ctime> shall not be used.*

#### **Message in Report**

The time handling functions of library <ctime> shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Language Support Library

**Category:** Required

**Introduced in R2013b**

## MISRA C++:2008 Rule 18-0-5

The unbounded functions of library <cstring> shall not be used

### Description

#### Rule Definition

*The unbounded functions of library <cstring> shall not be used.*

#### Message in Report

The unbounded functions of library <cstring> shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Check Information

**Group:** Language Support Library

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 18-2-1**

The macro offsetof shall not be used

### **Description**

#### **Rule Definition**

*The macro offsetof shall not be used.*

#### **Message in Report**

The macro offsetof shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Language Support Library

**Category:** Required

**Introduced in R2013b**

# MISRA C++:2008 Rule 18-4-1

Dynamic heap memory allocation shall not be used

## Description

### Rule Definition

*Dynamic heap memory allocation shall not be used.*

### Message in Report

Dynamic heap memory allocation shall not be used.

### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Check Information

**Group:** Language Support Library

**Category:** Required

**Introduced in R2013b**

## **MISRA C++:2008 Rule 18-7-1**

The signal handling facilities of `<csignal>` shall not be used

### **Description**

#### **Rule Definition**

*The signal handling facilities of `<csignal>` shall not be used.*

#### **Rationale**

Signal handling functions such as `signal` contains undefined and implementation-specific behavior.

You have to be very careful when using `signal` to avoid these behaviors.

#### **Message in Report**

The signal handling facilities of `<csignal>` shall not be used.

#### **Troubleshooting**

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### **Check Information**

**Group:** Language Support Library

**Category:** Required

## See Also

Function called from signal handler not asynchronous-safe | Return from computational exception signal handler | Shared data access within signal handler | Signal call in multithreaded program

**Introduced in R2013b**

## MISRA C++:2008 Rule 19-3-1

The error indicator `errno` shall not be used

### Description

#### Rule Definition

*The error indicator `errno` shall not be used.*

#### Rationale

Observing this rule encourages the good practice of not relying on `errno` to check error conditions.

Checking `errno` is not sufficient to guarantee absence of errors. Functions such as `fopen` might not set `errno` on error conditions. Often, you have to check the return value of such functions for error conditions.

#### Message in Report

The error indicator `errno` shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

### Examples

#### Use of `errno`

```
#include <cstdlib>
#include <cerrno>
```

```
void func (const char* str) {  
    errno = 0; // Noncompliant  
    int i = atoi(str);  
    if(errno != 0) { // Noncompliant  
        //Handle Error  
    }  
}
```

The use of `errno` violates this rule. The function `atoi` is not required to set `errno` if the input string cannot be converted to an integer. Checking `errno` later does not safeguard against possible failures in conversion.

## Check Information

**Group:** Diagnostic Library

**Category:** Required

## See Also

Misuse of `errno` | Misuse of `errno` in a signal handler

**Introduced in R2013b**

## MISRA C++:2008 Rule 27-0-1

The stream input/output library `<cstdio>` shall not be used

### Description

#### Rule Definition

*The stream input/output library `<cstdio>` shall not be used.*

#### Rationale

Functions in `cstdio` such as `gets`, `fgetpos`, `fopen`, `ftell`, etc. have unspecified, undefined and implementation-defined behavior.

For instance:

- The `gets` function:

```
char * gets ( char * buf );
```

does not check if the number of characters provided at the standard input exceeds the buffer `buf`. The function can have unexpected behavior when the input exceeds the buffer.

- The `fopen` function has implementation-specific behavior related to whether it sets `errno` on errors or whether it accepts additional characters following the standard mode specifiers.

#### Message in Report

The stream input/output library `<cstdio>` shall not be used.

#### Troubleshooting

If you expect a rule violation but do not see it, refer to “Coding Rule Violations Not Displayed”.

## Examples

### Use of gets

```
#include <stdio>

void func() {
    char array[10];
    gets(array);
}
```

The use of `gets` violates this rule.

## Check Information

**Group:** Input/output Library

**Category:** Required

**Introduced in R2013b**



# Custom Coding Rules

---

## Group 1: Files

The custom rules 1.x in Polyspace enforce naming conventions for files and folders. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
1.1	All source file names must follow the specified pattern.	Only the base name is checked. A source file is a file that is not included.
1.2	All source folder names must follow the specified pattern.	Only the folder name is checked. A source file is a file that is not included.
1.3	All include file names must follow the specified pattern.	Only the base name is checked. An include file is a file that is included.
1.4	All include folder names must follow the specified pattern.	Only the folder name is checked. An include file is a file that is included.

## Group 2: Preprocessing

The custom rules 2.x in Polyspace enforce naming conventions for macros. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
2.1	All macros must follow the specified pattern.	Macro names are checked before preprocessing.
2.2	All macro parameters must follow the specified pattern.	Macro parameters are checked before preprocessing.

## Group 3: Type definitions

The custom rules 3.x in Polyspace enforce naming conventions for fundamental data types. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

Number	Rule Applied	Other details
3.1	All integer types must follow the specified pattern.	Applies to integer types specified by typedef statements. Does not apply to enumeration types. For example: <code>typedef signed int int32_t;</code>
3.2	All float types must follow the specified pattern.	Applies to float types specified by typedef statements. For example: <code>typedef float f32_t;</code>
3.3	All pointer types must follow the specified pattern.	Applies to pointer types specified by typedef statements. For example: <code>typedef int* p_int;</code>
3.4	All array types must follow the specified pattern.	Applies to array types specified by typedef statements. For example: <code>typedef int[3] a_int_3;</code>
3.5	All function pointer types must follow the specified pattern.	Applies to function pointer types specified by typedef statements. For example: <code>typedef void (*pf_callback) (int);</code>

## Group 4: Structures

The custom rules 4.x in Polyspace enforce naming conventions for structured data types. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

Number	Rule Applied	Other details
4.1	All <code>struct</code> tags must follow the specified pattern.	
4.2	All <code>struct</code> types must follow the specified pattern.	This is the typedef name.
4.3	All <code>struct</code> fields must follow the specified pattern.	
4.4	All <code>struct</code> bit fields must follow the specified pattern.	

## Group 5: Classes (C++)

The custom rules 5.x in Polyspace enforce naming conventions for classes and class members. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
5.1	All class names must follow the specified pattern.	
5.2	All class types must follow the specified pattern.	This is the typedef name.
5.3	All data members must follow the specified pattern.	
5.4	All function members must follow the specified pattern.	
5.5	All static data members must follow the specified pattern.	
5.6	All static function members must follow the specified pattern.	
5.7	All bitfield members must follow the specified pattern.	

## Group 6: Enumerations

The custom rules 6.x in Polyspace enforce naming conventions for enumerations. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
6.1	All enumeration tags must follow the specified pattern.	
6.2	All enumeration types must follow the specified pattern.	This is the typedef name.
6.3	All enumeration constants must follow the specified pattern.	

## Group 7: Functions

The custom rules 7.x in Polyspace enforce naming conventions for functions and function parameters. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
7.1	All global functions must follow the specified pattern.	A global function is a function with external linkage.
7.2	All static functions must follow the specified pattern.	A static function is a function with internal linkage.
7.3	All function parameters must follow the specified pattern.	In C++, applies to non-member functions.

## Group 8: Constants

The custom rules 8.x in Polyspace enforce naming conventions for constants. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
8.1	All global constants must follow the specified pattern.	A global constant is a constant with external linkage.
8.2	All static constants must follow the specified pattern.	A static constant is a constant with internal linkage.
8.3	All local constants must follow the specified pattern.	A local constant is a constant without linkage.
8.4	All static local constants must follow the specified pattern.	A static local constant is a constant declared static in a function.

## Group 9: Variables

The custom rules 9.x in Polyspace enforce naming conventions for variables. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
9.1	All global variables must follow the specified pattern.	A global variable is a variable with external linkage.
9.2	All static variables must follow the specified pattern.	A static variable is a variable with internal linkage.
9.3	All local variables must follow the specified pattern.	A local variable is a variable without linkage.
9.4	All static local variables must follow the specified pattern.	A static local variable is a variable declared static in a function.

## Group 10: Name spaces (C++)

The custom rules 10.x in Polyspace enforce naming conventions for namespaces. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

Number	Rule Applied
10.1	All names spaces must follow the specified pattern.

## Group 11: Class templates (C++)

The custom rules 11.x in Polyspace enforce naming conventions for class templates. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
11.1	All class templates must follow the specified pattern.	
11.2	All class template parameters must follow the specified pattern.	

## Group 12: Function templates (C++)

The custom rules 12.x in Polyspace enforce naming conventions for function templates. For information on how to enable these rules, see `Check custom rules (-custom-rules)`.

<b>Number</b>	<b>Rule Applied</b>	<b>Other details</b>
12.1	All function templates must follow the specified pattern.	Applies to non-member functions.
12.2	All function template parameters must follow the specified pattern.	Applies to non-member functions.
12.3	All function template members must follow the specified pattern.	

## Group 20: Style

The custom rules 20.x in Polyspace enforce coding style conventions such as number of characters per line. For information on how to enable these rules, see [Check custom rules \(-custom-rules\)](#).

Number	Rule Applied	Other details
20.1	Source line length must not exceed specified number of characters.	<p>When configuring the checker, specify:</p> <ul style="list-style-type: none"><li>• A number for the character limit. Use the <b>Pattern</b> column on the configuration or the <code>pattern=</code> line in the custom rules text file.</li><li>• A violation message such as:  Line exceeds <i>n</i> characters.</li></ul> <p>Use the <b>Convention</b> column on the configuration or the <code>convention=</code> line in the custom rules text file.</p>

# Code Metrics

---

## Comment Density

Ratio of number of comments to number of statements

### Description

The metric specifies the ratio of comments to statements expressed as a percentage.

Based on HIS specifications:

- Multi-line comments count as one comment.

For instance, the following constitutes one comment:

```
// This function implements  
// regular maintenance on an internal database
```

- Comments that start with the source code line do not count as comments.

For instance, this comment does not count as a comment for the metric but counts as a statement instead:

```
remove(i); // Remove employee record
```

- A statement typically ends with a semi-colon with some exceptions. Exceptions include semi-colons in `for` loops or structure field declarations.

For instance, the initialization, condition and increment within parentheses in a `for` loop is counted as one statement. The following counts as one statement:

```
for(i=0; i <100; i++)
```

If you also declare the loop counter at initialization, it counts as two statements.

The recommended lower limit for this metric is 20. For better readability of your code, try to place at least one comment for every five statements.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

# Examples

## Comment Density Calculation

```

struct record {
    char name[40];
    long double salary;
    int isEmployed;
};

struct record dataBase[100];

struct record fetch(void);
void remove(int);

void maintenanceRoutines() {
// This function implements
// regular maintenance on an internal database
    int i;
    struct record tempRecord;

    for(i=0; i <100; i++) {
        tempRecord = fetch(); // This function fetches a record
        // from the database
        if(tempRecord.isEmployed == 0)
            remove(i); // Remove employee record
        //from the database
    }
}

```

In this example, the comment density is 38. The calculation is done as follows:

Code	Running Total of Comments	Running Total of Statements
<pre> struct record {     char name[40];     long double salary;     int isEmployed; }; </pre>	0	1

Code	Running Total of Comments	Running Total of Statements
struct record dataBase[100]; struct record fetch(void); void remove(int);	0	4
void maintenanceRoutines() {	0	4
// This function implements // regular maintenance on an internal database	1	4
int i; struct record tempRecord;	1	6
for(i=0; i <100; i++) {	1	6
tempRecord = fetch(); // This function fetches a record // from the database	2	7
if(tempRecord.isEmployed == 0) remove(i); // Remove employee record //from the database } }	3	8

There are 3 comments and 8 statements. The comment density is  $3/8 * 100 = 38$ .

## Metric Information

**Group:** File

**Acronym:** COMF

**HIS Metric:** Yes

## See Also

Calculate code metrics (-code-metrics)

# Cyclomatic Complexity

Number of linearly independent paths in function body

## Description

This metric calculates the number of decision points in a function and adds one to the total. A decision point is a statement that causes your program to branch into two paths.

The recommended upper limit for this metric is 10. If the cyclomatic complexity is high, the code is both difficult to read and can cause more orange checks. Therefore, try to limit the value of this metric.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Computation Details

The metric calculation uses the following rules to identify decision points:

- An `if` statement is one decision point.
- The statements `for` and `while` count as one decision point, even when no condition is evaluated, for example, in infinite loops.
- Boolean combinations (`&&`, `||`) do not count as decision points.
- `case` statements do not count as decision points unless they are followed by a `break` statement. For instance, this code has a cyclomatic complexity of two:

```
switch(num) {
    case 0:
    case 1:
    case 2:
        break;
    case 3:
    case 4:
}
```

- The calculation is done after preprocessing:

- Macros are expanded.
- Conditional compilation is applied. The blocks hidden by preprocessing directives are ignored.

## Examples

### Function with Nested `if` Statements

```
int foo(int x,int y)
{
    int flag;
    if (x <= 0)
        /* Decision point 1*/
        flag = 1;
    else
    {
        if (x < y )
            /* Decision point 2*/
            flag = 1;
        else if (x==y)
            /* Decision point 3*/
            flag = 0;
        else
            flag = -1;
    }
    return flag;
}
```

In this example, the cyclomatic complexity of `foo` is 4.

### Function with `?` Operator

```
int foo (int x, int y) {
    if((x <0) ||(y < 0))
        /* Decision point 1*/
        return 0;
    else
        return (x > y ? x: y);
        /* Decision point 2*/
}
```

In this example, the cyclomatic complexity of `foo` is 3. The `?` operator is the second decision point.

## Function with switch Statement

```
#include <stdio.h>

int foo(int x,int y, int ch)
{
    int val = 0;
    switch(ch) {
    case 1:
        /* Decision point 1*/
        val = x + y;
        break;
    case 2:
        /* Decision point 2*/
        val = x - y;
        break;
    default:
        printf("Invalid choice.");
    }
    return val;
}
```

In this example, the cyclomatic complexity of `foo` is 3.

## Function with Nesting of Different Control-Flow Statements

```
int foo(int x,int y, int bound)
{
    int count = 0;
    if (x <= y)
        /* Decision point 1*/
        count = 1;
    else
        while(x>y) {
            /* Decision point 2*/
            x--;
            if(count< bound) {
                /* Decision point 3*/
                count++;
            }
        }
}
```

```
        }  
    return count;  
}
```

In this example, the cyclomatic complexity of `foo` is 4.

### **Metric Information**

**Group:** Function

**Acronym:** VG

**HIS Metric:** Yes

### **See Also**

Calculate code metrics (`-code-metrics`)

# Higher Estimate of Local Variable Size

Total size of all local variables in function

## Description

This metric provides a conservative estimate of the total size of local variables in a function. The metric is the sum of the following sizes in bytes:

- Size of function return value
- Sizes of function parameters
- Sizes of local variables
- Additional padding introduced for memory alignment

Your actual stack usage due to local variables can be different from the metric value.

- Some of the variables are stored in registers instead of on the stack.
- Your compiler performs variable liveness analysis to enable certain memory optimizations. For instance, compilers store the address to which the execution returns following the function call. When computing this metric, Polyspace does not consider these optimizations.
- Your compiler uses additional memory during a function call. When computing this metric, Polyspace does not consider this hidden memory usage.
- (C++ only) Destructors and `try-catch` statements can introduce hidden contributions to the metric value.

However, the metric provides a reasonable estimate of the stack usage due to local variables.

To determine the sizes of basic types, the software uses your specifications for `Target processor type (-target)`. The metric also takes into account `#pragma pack` directives in your code.

## Examples

### All Variables of Same Type

```
int flag();

int func(int param) {
    int var_1;
    int var_2;
    if (flag()) {
        int var_3;
        int var_4;
    } else {
        int var_5;
    }
}
```

In this example, assuming 4 bytes for `int`, the higher estimate of local variable size is 28. The breakup of the size is shown in this table.

Variable	Size (in Bytes)	Running Total
Return value	4	4
Parameter <code>param</code>	4	8
Local variables <code>var_1</code> and <code>var_2</code>	$4+4=8$	16
Local variables defined in the <code>if</code> condition	$(4+4)+4=12$ The size of variables in the first branch is eight bytes. The size in the second branch is four bytes. The sum of the two branches is 12 bytes.	28

No padding is introduced for memory alignment because all the variables involved have the same type.

## Variables of Different Types

```
char func(char param) {
    int var_1;
    char var_2;
    double var_3;
}
```

In this example, assuming one byte for `char`, four bytes for `int` and eight bytes for `double` and four bytes for alignment, the higher estimate of local variable size is 20. The alignment is usually the word size on your platform. In your Polyspace project, you specify the alignment through your target processor. For more information, see the `Alignment` column in `Target processor type (-target)`. The breakup of the size is shown in this table.

Variable	Size (in Bytes)	Running Total
Return value	1	1
Additional padding introduced before <code>param</code> is stored	0 No memory alignment is required because the next variable <code>param</code> has the same size.	1
Parameter <code>param</code>	1	2
Additional padding introduced before <code>var_1</code> is stored	2 Memory must be aligned using padding because the next variable <code>var_1</code> requires four bytes. The storage must start from a memory address at a multiple of four.	4
<code>var_1</code>	4	8

Variable	Size (in Bytes)	Running Total
Additional padding introduced before var_2 is stored	0 No memory alignment is required because the next variable var_2 has smaller size.	8
var_2	1	9
Additional padding introduced before var_3 is stored	3 Memory must be aligned using padding because the next variable var_3 has eight bytes. The storage must start from a memory address at a multiple of the alignment, four bytes.	12
var_3	8	20

The rules for the amount of padding are:

- If the next variable stored has the same or smaller size, no padding is required.
- If the next variable has a greater size:
  - If the variable size is the same as or less than the alignment on the platform, the amount of padding must be sufficient so that the storage address is a multiple of its size.
  - If the variable size is greater than the alignment on the platform, the amount of padding must be sufficient so that the storage address is a multiple of the alignment.

## C++ Methods and Objects

```
class MySimpleClass {
public:
    MySimpleClass() {};
    MySimpleClass(int) {};
    ~MySimpleClass() {};
};
```

```
int main() {
    MySimpleClass c;
    return 0;
}
```

In this example, the estimated local variable sizes are:

- Constructor `MySimpleClass::MySimpleClass()`: Four bytes.

The size comes from the `this` pointer, which is an implicit argument to the constructor. You specify the pointer size using the option `Target processor type (-target)`.

- Constructor `MySimpleClass::MySimpleClass(int)`: Eight bytes.

The size comes from the `this` pointer and the `int` argument.

- Destructor `MySimpleClass::~~MySimpleClass()`: Eight bytes.

The size comes from the `this` pointer and a hidden contribution from an internal variable.

- `main()`: Five bytes.

The size comes from the `int` return value and the size of object `c`. The minimum size of an object is the alignment that you specify using the option `Target processor type (-target)`.

## C++ Functions with Object Arguments

```
class MyClass {
public:
    MyClass() {};
    MyClass(int) {};
    ~MyClass() {};
private:
    int i[10];
};
void func1(const MyClass& c) {
}

void func2() {
    func1(4);
}
```

In this example, the estimated local variable size for `func2()` is 40 bytes. When `func2()` calls `func1()`, a temporary object of the class `MyClass` is created. The object has ten `int` variables, each with a size of four bytes.

### Metric Information

**Group:** Function

**Acronym:** LOCAL\_VARS\_MAX

**HIS Metric:** No

### See Also

Lower Estimate of Local Variable Size | Calculate code metrics (-code-metrics)

**Introduced in R2016b**

# Language Scope

Language scope

## Description

This metric measures the cost of maintaining or changing a function. It is calculated as:

$$(N1 + N2)/(n1 + n2)$$

Here:

- N1 is the number of occurrences of operators.

Other than identifiers (variable or function names) and literal constants, everything else counts as operators.

- N2 is the number of occurrences of operands.
- n1 is the number of distinct operators.
- n2 is the number of distinct operands.

---

**Tip** To find N1 + N2, count the total number of tokens. To find n1 + n2, count the number of unique tokens.

---

The recommended upper limit for this metric is 4. For lower maintenance cost for a function, try to enforce an upper limit on this metric. For instance, if the same operand occurs many times, to change the operand name, you have to make many substitutions.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Examples

### Language Scope Calculation

```
int f(int i)
{
```

```
    if (i == 1)
        return i;
    else
        return i * g(i-1);
}
```

In this example:

- N1 = 19.
- N2 = 9.
- n1 = 12.

The distinct operators are `int, (, ), {, if, ==, return, else, *, -, ;, }`.

- n2 = 4.

The distinct operands are `f, i, 1` and `g`.

The language scope of `f` is  $(17 + 9) / (12 + 4) = 1.8$ .

## C++ Namespaces in Language Scope Calculation

```
namespace std {
    int func2() {
        return 123;
    }
};

namespace my_namespace {
    using namespace std;
    int func1(int a, int b) {
        return func2();
    }
};
```

In this example, the namespace `std` is implicitly associated with `func2`. The language scope computation treats `func2()` as `std::func2()`. Likewise, the computation treats `func1()` as `my_namespace::func1()`.

For instance, the language scope value for `func1` is 1.3. To break down this calculation:

- N1 + N2 = 20.

- $n1 + n2 = 15$ .

The distinct operators are `int`, `::`, `(`, `comma`, `)`, `{`, `return`, `;`, and `}`.

The distinct operands are `my_namespace`, `func1`, `a`, `b`, `std`, and `func2`.

## Metric Information

**Group:** Function

**Acronym:** VOCF

**HIS Metric:** Yes

## See Also

Calculate code metrics (`-code-metrics`)

## Lower Estimate of Local Variable Size

Total size of local variables in function taking nested scopes into account

### Description

This metric provides an optimistic estimate of the total size of local variables in a function. The metric is the sum of the following sizes in bytes:

- Size of function return value
- Sizes of function parameters
- Sizes of local variables

Suppose that the function has variable definitions in nested scopes as follows:

```
type func (type param_1, ...) {  
    {  
        /* Scope 1 */  
        type var_1, ...;  
    }  
    {  
        /* Scope 2 */  
        type var_2, ...;  
    }  
}
```

The software computes the total variable size in each scope and uses whichever total is greatest. For instance, if a conditional statement has variable definitions, the software computes the total variable size in each branch, and then uses whichever total is greatest. If a nested scope itself has further nested scopes, the same process is repeated for the inner scopes.

A variable defined in a nested scope is not visible outside the scope. Therefore, some compilers reuse stack space for variables defined in separate scopes. This metric provides a more accurate estimate of stack usage for such compilers. Otherwise, use the metric **Higher Estimate of Local Variable Size**. This metric adds the size of all local variables, whether or not they are defined in nested scopes.

- Additional padding introduced for memory alignment

Your actual stack usage due to local variables can be different from the metric value.

- Some of the variables are stored in registers instead of on the stack.
- Your compiler performs variable liveness analysis to enable certain memory optimizations. When computing this metric, Polyspace does not consider these optimizations.
- Your compiler uses additional memory during a function call. For instance, compilers store the address to which the execution returns following the function call. When computing this metric, Polyspace does not consider this hidden memory usage.
- (C++ only) Destructors and `try-catch` statements can introduce hidden contributions to the metric value.

However, the metric provides a reasonable estimate of the stack usage due to local variables.

To determine the sizes of basic types, the software uses your specifications for `Target processor type (-target)`. The metric also takes into account `#pragma pack` directives in your code.

## Examples

### All Variables of Same Type

```
int flag();

int func(int param) {
    int var_1;
    int var_2;
    if (flag()) {
        int var_3;
        int var_4;
    } else {
        int var_5;
    }
}
```

In this example, assuming four bytes for `int`, the lower estimate of local variable size is 24. The breakup of the metric is shown in this table.

Variable	Size (in Bytes)	Running Total
Return value	4	4
Parameter param	4	8
Local variables var_1 and var_2	4+4=8	16
Local variables defined in the if condition	$\max(4+4, 4) = 8$ The size of variables in the first branch is eight bytes. The size in the second branch is four bytes. The maximum of the two branches is eight bytes.	24

No padding is introduced for memory alignment because all the variables involved have the same type.

## Variables of Different Types

```
char func(char param) {
    int var_1;
    char var_2;
    double var_3;
}
```

In this example, assuming one byte for char, four bytes for int, eight bytes for double and four bytes for alignment, the lower estimate of local variable size is 20. The alignment is usually the word size on your platform. In your Polyspace project, you specify the alignment through your target processor. For more information, see the Alignment column in Target processor type (-target). The breakup of the size is shown in this table.

Variable	Size (in Bytes)	Running Total
Return value	1	1

Variable	Size (in Bytes)	Running Total
Additional padding introduced before param is stored	0 No memory alignment is required because the next variable param has the same size.	1
Parameter param	1	2
Additional padding introduced before var_1 is stored	2 Memory must be aligned using padding because the next variable var_1 requires four bytes. The storage must start from a memory address at a multiple of four.	4
var_1	4	8
Additional padding introduced before var_2 is stored	0 No memory alignment is required because the next variable var_2 has smaller size.	8
var_2	1	9
Additional padding introduced before var_3 is stored	3 Memory must be aligned using padding because the next variable var_3 requires eight bytes. The storage must start from a memory address at a multiple of the alignment, four bytes.	12
var_3	8	20

The rules for the amount of padding are:

- If the next variable stored has the same or smaller size, no padding is required.
- If the next variable has a greater size:
  - If the variable size is the same as or less than the alignment on the platform, the amount of padding must be sufficient so that the storage address is a multiple of its size.
  - If the variable size is greater than the alignment on the platform, the amount of padding must be sufficient so that the storage address is a multiple of the alignment.

## C++ Methods and Objects

```
class MySimpleClass {
public:
    MySimpleClass() {};
    MySimpleClass(int) {};
    ~MySimpleClass() {};
};

int main() {
    MySimpleClass c;
    return 0;
}
```

In this example, the estimated local variable sizes are:

- Constructor `MySimpleClass::MySimpleClass()`: Four bytes.

The size comes from the `this` pointer, which is an implicit argument to the constructor. You specify the pointer size using the option `Target processor type (-target)`.

- Constructor `MySimpleClass::MySimpleClass(int)`: Eight bytes.

The size comes from the `this` pointer and the `int` argument.

- Destructor `MySimpleClass::~MySimpleClass()`: Eight bytes.

The size comes from the `this` pointer and a hidden contribution from an internal variable.

- `main()`: Five bytes.

The size comes from the `int` return value and the size of object `c`. The minimum size of an object is the alignment that you specify using the option `Target processor type (-target)`.

## C++ Functions with Object Arguments

```
class MyClass {
public:
    MyClass() {};
    MyClass(int) {};
    ~MyClass() {};
private:
    int i[10];
};
void func1(const MyClass& c) {
}

void func2() {
    func1(4);
}
```

In this example, the estimated local variable size for `func2()` is 40 bytes. When `func2()` calls `func1()`, a temporary object of the class `MyClass` is created. The object has ten `int` variables, each with a size of four bytes.

## Metric Information

**Group:** Function

**Acronym:** LOCAL\_VARS\_MIN

**HIS Metric:** No

## See Also

Higher Estimate of Local Variable Size | Calculate code metrics (-code-metrics)

**Introduced in R2016b**

## Estimated Function Coupling

Measure of complexity between levels of call tree

### Description

This metric provides an approximate measure of complexity between different levels of the call tree. The metric is defined as:

*number of call occurrences - number of function definitions + 1*

If there are more function definitions than function calls, the estimated function coupling result is negative.

This metric:

- Counts function calls and function definitions in the current file only.
  - It does not count function definitions in a header file included in the current file.
- Treats `static` and `inline` functions like any other function.

### Examples

#### Same Function Called Multiple Times

```
void checkBounds(int *);
int getUnboundedValue();

int getBoundedValue(void) {
    int num = getUnboundedValue();
    checkBounds(&num);
    return num;
}

void main() {
    int input1=getBoundedValue(), input2= getBoundedValue(), prod;
    prod = input1 * input2;
```

```
    checkBounds(&prod);  
}
```

In this example, there are:

- 5 call occurrences. Both `getBoundedValue` and `checkBounds` are called twice and `getUnboundedValue` is called once.
- 2 function definitions. `main` and `getBoundedValue` are defined.

Therefore, the Estimated function coupling is  $5 - 2 + 1 = 4$ .

## Negative Estimated Function Coupling

```
int foobar(int a, int b){  
    return a+b;  
}  
  
int bar(int b){  
    return b+2;  
}  
  
int foo(int a){  
    return a<<2;  
}  
  
int main(int x){  
    foobar(x,x+2);  
    return 0;  
}
```

This example shows how you can get a negative estimated function coupling result. In this example, you see:

- 1 function call in `main`.
- 4 defined functions: `foobar`, `bar`, `foo`, and `main`.

Therefore, the estimated function coupling is  $1 - 4 + 1 = -2$ .

## Metric Information

**Group:** File

**Acronym:** FC0  
**HIS Metric:** No

## **See Also**

Number of Call Occurrences | Calculate code metrics (-code-metrics)

# Number of Call Levels

Maximum depth of nesting of control flow structures

## Description

This metric specifies the maximum nesting depth of control flow statements such as `if`, `switch`, `for`, or `while` in a function. A function without control-flow statements has a call level 1.

The recommended upper limit for this metric is 4. For better readability of your code, try to enforce an upper limit for this metric.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Examples

### Function with Nested `if` Statements

```
int foo(int x,int y)
{
    int flag = 0;
    if (x <= 0)
        /* Call level 1*/
        flag = 1;
    else
    {
        if (x <= y )
            /* Call level 2*/
            flag = 1;
        else
            flag = -1;
    }
    return flag;
}
```

In this example, the number of call levels of `foo` is 2.

## Function with Nesting of Different Control-Flow Statements

```
int foo(int x,int y, int bound)
{
    int count = 0;
    if (x <= y)
        /* Call level 1*/
        count = 1;
    else
        while(x>y) {
            /* Call level 2*/
            x--;
            if(count< bound) {
                /* Call level 3*/
                count++;
            }
        }
    return count;
}
```

In this example, the number of call levels of foo is 3.

## Metric Information

**Group:** Function

**Acronym:** LEVEL

**HIS Metric:** Yes

## See Also

Calculate code metrics (-code-metrics)

# Number of Call Occurrences

Number of calls in function body

## Description

This metric specifies the number of function calls in the body of a function.

Calls through a function pointer are not counted. Calls in unreachable code and calls to standard library functions are counted. `assert` is considered as a macro and not a function, so it is not counted.

## Examples

### Same Function Called Multiple Times

```
int func1(void);
int func2(void);

int foo() {
    return (func1() + func1()*func1() + 2*func2());
}
```

In this example, the number of call occurrences in `foo` is 4.

### Function Called in a Loop

```
#include<stdio.h>

void fillArraySize10(int *arr) {
    for(int i=0; i<10; i++)
        arr[i]=getVal();
}

int getVal(void) {
    int val;
    printf("Enter a value:");
```

```
        scanf("%d", &val);
        return val;
    }
```

In this example, the number of call occurrences in `fillArraySize10` is 1.

## Recursive Function

```
#include <stdio.h>

void main() {
    int count;
    printf("How many numbers ?");
    scanf("%d",&count);
    fibonacci(count);
}

int fibonacci(int num)
{
    if ( num == 0 )
        return 0;
    else if ( num == 1 )
        return 1;
    else
        return ( fibonacci(num-1) + fibonacci(num-2) );
}
```

In this example, the number of call occurrences in `fibonacci` is 2.

## Metric Information

**Group:** Function

**Acronym:** NCALLS

**HIS Metric:** No

## See Also

Number of Called Functions | Calculate code metrics (-code-metrics)

# Number of Called Functions

Number of callees of a function

## Description

This metric specifies the number of callees of a function.

Calls through a function pointer are not counted. Calls in unreachable code and calls to standard library functions are counted. `assert` is considered as a macro and not a function, so it is not counted. For C++ templates, the first instantiation of the template is used to calculate this metric.

The recommended upper limit for this metric is 7. For more self-contained code, try to enforce an upper limit on this metric.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Examples

### Same Function Called Multiple Times

```
int func1(void);
int func2(void);

int foo() {
    return (func1() + func1()*func1() + 2*func2());
}
```

In this example, the number of called functions in `foo` is 2. The called functions are `func1` and `func2`.

### Recursive Function

```
#include <stdio.h>

void main() {
```

```
int count;
printf("How many numbers ?");
scanf("%d",&count);
fibonacci(count);
}

int fibonacci(int num)
{
    if ( num == 0 )
        return 0;
    else if ( num == 1 )
        return 1;
    else
        return ( fibonacci(num-1) + fibonacci(num-2) );
}
```

In this example, the number of called functions in `fibonacci` is 1. The called function is `fibonacci` itself.

## Metric Information

**Group:** Function

**Acronym:** CALLS

**HIS Metric:** Yes

## See Also

Number of Call Occurrences | Number of Calling Functions | Calculate code metrics (-code-metrics)

# Number of Calling Functions

Number of distinct callers of a function

## Description

This metric measures the number of distinct callers of a function.

Calls through a function pointer are not counted. Calls in unreachable code are counted. Even if a caller calls a function more than once, it is counted only once when this metric is calculated. For C++ templates, the first instantiation of the template is used to calculate this metric.

The recommended upper limit for this metric is 5. For more self-contained code, try to enforce an upper limit on this metric.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Examples

### Same Function Calling a Function Multiple Times

```
#include <stdio.h>

int getVal() {
    int myVal;
    printf("Enter a value:");
    scanf("%d", &myVal);
    return myVal;
}

int func() {
    int val=getVal();
    if(val<0)
        return 0;
    else
        return val;
}
```

```
int func2() {
    int val=getVal();
    while(val<0)
        val=getVal();
    return val;
}
```

In this example, the number of calling functions for `getVal` is 2. The calling functions are `func` and `func2`.

## Recursive Function

```
#include <stdio.h>

void main() {
    int count;
    printf("How many numbers ?");
    scanf("%d",&count);
    fibonacci(count);
}

int fibonacci(int num)
{
    if ( num == 0 )
        return 0;
    else if ( num == 1 )
        return 1;
    else
        return ( fibonacci(num-1) + fibonacci(num-2) );
}
```

In this example, the number of calling functions for `fibonacci` is 2. The calling functions are `main` and `fibonacci` itself.

## Metric Information

**Group:** Function

**Acronym:** CALLING

**HIS Metric:** Yes

## **See Also**

Number of Called Functions | Calculate code metrics (-code-metrics)

## Number of Direct Recursions

Number of instances of a function calling itself directly

### Description

This metric specifies the number of direct recursions in your project.

A direct recursion is a recursion where a function calls itself in its own body. If indirect recursions do not occur, the number of direct recursions is equal to the number of recursive functions.

The recommended upper limit for this metric is 0. To avoid the possibility of exceeding available stack space, do not use recursions in your code. To detect use of recursions, check for violations of MISRA C:2012 Rule 17.2.

### Examples

#### Direct Recursion

```
int getVal(void);

void main() {
    int count = getVal(), total;
    assert(count > 0 && count <100);
    total = sum(count);
}

int sum(int val) {
    if(val<0)
        return 0;
    else
        return (val + sum(val-1));
}
```

In this example, the number of direct recursions is 1.

## **Metric Information**

**Group:** Project

**Acronym:** AP\_CG\_DIRECT\_CYCLE

**HIS Metric:** Yes

## **See Also**

MISRA C:2012 Rule 17.2 | Calculate code metrics (-code-metrics)

## Number of Executable Lines

Number of executable lines in function body

### Description

This metric measures the number of executable lines in a function body. When calculating the value of this metric, Polyspace excludes declarations without static initializers, comments, blank lines, braces or preprocessing directives.

If the function body contains a `#include` directive, the included file source code is also calculated as part of this metric.

This metric is not calculated for C++ templates.

### Examples

#### Function with Declarations, Braces and Comments

```
void func(int);

int getSign(int arg) {
    int sign;
    if(arg<0) {
        sign=-1;
        func(-arg);
        /* func takes positive arguments */
    }
    else if(arg==0)
        sign=0;
    else {
        sign=1;
        func(arg);
    }
    return sign;
}
```

In this example, the number of executable lines of `getSign` is 9. The calculation excludes:

- The declaration `int sign;`.
- The comment `/* ... */`.
- The two lines with braces only.

## Metric Information

**Group:** Function

**Acronym:** FXLN

**HIS Metric:** No

## See Also

Number of Lines Within Body | Number of Instructions | Calculate code metrics (-code-metrics)

## Number of Files

Number of source files

## Description

This metric calculates the number of source files in your project.

## Metric Information

**Group:** Project

**Acronym:** FILES

**HIS Metric:** No

## See Also

Number of Header Files | Calculate code metrics (-code-metrics)

# Number of Function Parameters

Number of function arguments

## Description

This metric measures the number of function arguments.

If ellipsis is used to denote variable number of arguments, when calculating this metric, the ellipsis is not counted.

The recommended upper limit for this metric is 5. For less dependency between functions and fewer side effects, try to enforce an upper limit on this metric.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Examples

### Function with Fixed Arguments

```
int initializeArray(int* arr, int size) {  
}
```

In this example, `initializeArray` has two parameters.

### Function with Type Definition in Arguments

```
int getValueInLoc(struct {int* arr; int size;}myArray, int loc) {  
}
```

In this example, `getValueInLoc` has two parameters.

### Function with Variable Arguments

```
double average ( int num, ... )  
{
```

```
    va_list arg;
    double sum = 0;

    va_start ( arg, num );

    for ( int x = 0; x < num; x++ )
    {
        sum += va_arg ( arg, double );
    }
    va_end ( arg);

    return sum / num;
}
```

In this example, `average` has one parameter. The ellipsis denoting variable number of arguments is not counted.

## Metric Information

**Group:** Function

**Acronym:** PARAM

**HIS Metric:** Yes

## See Also

Calculate code metrics (`-code-metrics`)

# Number of Goto Statements

Number of goto statements

## Description

This metric measures the number of goto statements in a function.

break and continue statements are not counted.

The recommended upper limit on this metric is 0. For better readability of your code, avoid goto statements in your code. To detect use of goto statements, check for violations of MISRA C:2012 Rule 15.1.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Examples

### Function with goto Statements

```
#define SIZE 10
int initialize(int **arr, int loc);
void printString(char *);
void printErrorMessage(void);
void printExecutionMessage(void);

int main()
{
    int *arrayOfStrings[SIZE], len[SIZE], i;
    for ( i = 0; i < SIZE; i++ )
    {
        len[i] = initialize(arrayOfStrings, i);
    }

    for ( i = 0; i < SIZE; i++ )
    {
        if(len[i] == 0)
            goto emptyString;
    }
}
```

```
        else
            goto nonEmptyString;
        loop: printExecutionMessage();
    }

emptyString:
    printErrorMessage();
    goto loop;
nonEmptyString:
    printString(arrayOfStrings[i]);
    goto loop;
}
```

In this example, the function main has 4 goto statements.

## Metric Information

**Group:** Function

**Acronym:** GOTO

**HIS Metric:** Yes

## See Also

Calculate code metrics (-code-metrics)

# Number of Header Files

Number of included header files

## Description

This metric measures the number of header files in the project. Both directly and indirectly included header files are counted.

The metric gives a slightly higher number than the actual number of header files that you use because Polyspace® internal header files and header files included by those files are also counted. For the same reason, the metric can vary slightly even if you do not explicitly include new header files or remove inclusion of header files from your code. For instance, the number of Polyspace® internal header files can vary if you change your analysis options.

## Metric Information

**Group:** Project

**Acronym:** INCLUDES

**HIS Metric:** No

## See Also

Number of Files | Calculate code metrics (-code-metrics)

## Number of Instructions

Number of instructions per function

### Description

This metric measures the number of instructions in a function body.

The recommended upper limit for this metric is 50. For more modular code, try to enforce an upper limit for this metric.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

### Computation Details

The metric is calculated using the following rules:

- A simple statement ending with a `;` is one instruction.

If the statement is empty, it does not count as an instruction.

- A variable declaration counts as one instruction only if the variable is also initialized.
- Control flow statements such as `if`, `for`, `break`, `goto`, `return`, `switch`, `while`, `do-while` count as one instruction.
- The following do not count as instructions by themselves:

- Beginning of a block of code

For instance, the following counts as one instruction:

```
{
    var = 1;
}
```

- Labels

For instance, the following counts as two instructions. The `case` labels do not count as instructions.

```
switch (1) { // Instruction 1: switch
    case 0:
```

```
        case 1:
        case 2:
        default:
            break;    // Instruction 2: break
    }
```

## Examples

### Calculation of Number of Instructions

```
int func(int* arr, int size) {
    int i, countPos=0, countNeg=0, countZero = 0;
    for(i=0; i<size; i++) {
        if(arr[i] >0)
            countPos++;
        else if(arr[i] ==0)
            countZero++;
        else
            countNeg++;
    }
}
```

In this example, the number of instructions in func is 9. The instructions are:

- 1 countPos=0
- 2 countNeg=0
- 3 countZero=0
- 4 for(i=0;i<size;i++) { ... }
- 5 if(arr[i] >=0)
- 6 countPos++
- 7 else if(arr[i]==0)

The ending else is counted as part of the if-else instruction.

- 8 countZero++
- 9 countNeg++

---

**Note** This metric is different from the number of executable lines. For instance:

- `for(i=0;i<size;i++)` has 1 instruction and 1 executable line.
- The following code has 1 instruction but 3 executable lines.

```
for(i=0;  
    i<size;  
    i++)
```

---

### **Metric Information**

**Group:** Function

**Acronym:** STMT

**HIS Metric:** Yes

### **See Also**

Calculate code metrics (`-code-metrics`)

# Number of Lines

Total number of lines in a file

## Description

This metric calculates the number of lines in a file. When calculating the value of this metric, Polyspace includes comments and blank lines.

This metric is calculated for source files and header files in the same folders as source files. If you want:

- The metric reported for other header files, change the default value of the option `Generate results for sources` and `(-generate-results-for)`.
- The metric not reported for header files at all, change the value of the option `Do not generate results for` `(-do-not-generate-results-for)` to `all-headers`.

## Metric Information

**Group:** File

**Acronym:** TOTAL\_LINES

**HIS Metric:** No

## See Also

Number of Lines Without Comment | Calculate code metrics (`-code-metrics`)

## Number of Lines Within Body

Number of lines in function body

### Description

This metric calculates the number of lines in function body. When calculating the value of this metric, Polyspace includes declarations, comments, blank lines, braces and preprocessing directives.

If the function body contains a `#include` directive, the included file source code is also calculated as part of this metric.

This metric is not calculated for C++ templates.

### Examples

#### Function with Declarations, Braces and Comments

```
void func(int);

int getSign(int arg) {
    int sign;
    if(arg<0) {
        sign=-1;
        func(-arg);
        /* func takes positive arguments */
    }
    else if(arg==0)
        sign=0;
    else {
        sign=1;
        func(arg);
    }
    return sign;
}
```

In this example, the number of executable lines of `getSign` is 13. The calculation includes:

- The declaration `int sign;`.
- The comment `/* ... */`.
- The two lines with braces only.

## Metric Information

**Group:** Function

**Acronym:** FLIN

**HIS Metric:** No

## See Also

Number of Executable Lines | Calculate code metrics (-code-metrics)

## Number of Lines Without Comment

Number of lines of code excluding comments

### Description

This metric calculates the number of lines in a file. When calculating the value of this metric, Polyspace excludes comments and blank lines.

This metric is calculated for source files and header files in the same folders as source files. If you want:

- The metric reported for other header files, change the default value of the option `Generate results for sources` and `(-generate-results-for)`.
- The metric not reported for header files at all, change the value of the option `Do not generate results for` `(-do-not-generate-results-for)` to `all-headers`.

### Metric Information

**Group:** File

**Acronym:** `LINES_WITHOUT_CMT`

**HIS Metric:** No

### See Also

Number of Lines | Calculate code metrics `(-code-metrics)`

# Number of Local Non-Static Variables

Total number of local variables in function

## Description

This metric provides the number of local variables in a function.

The metric excludes static variables. To find number of static variables, use the metric Number of Local Static Variables.

## Examples

### Non-Structured Variables

```
int flag();

int func(int param) {
    int var_1;
    int var_2;
    if (flag()) {
        int var_3;
        int var_4;
    } else {
        int var_5;
    }
}
```

In this example, the number of local non-static variables in `func` is 5. The number does not include the function arguments and return value.

### Arrays and Structured Variables

```
typedef struct myStruct{
    char  arr1[50];
    char  arr2[50];
    int   val;
```

```
} myStruct;

void func(void) {
    myStruct var;
    char localArr[50];
}
```

In this example, the number of local non-static variables in `func` is 2: the structured variable `var` and the array `localArr`.

## Variables in Class Methods

```
class Rectangle {
    int width, height;
    public:
        void set (int,int);
        int area (void);
} rect;

int Rectangle::area (void) {
    int temp;
    temp = width * height;
    return(temp);
}
```

In this example, the number of local non-static variables in `Rectangle::area` is 1: the variable `temp`.

## Metric Information

**Group:** Function

**Acronym:** LOCAL\_VARS

**HIS Metric:** No

## See Also

Number of Local Static Variables | Higher Estimate of Local Variable Size | Lower Estimate of Local Variable Size | Calculate code metrics (-code-metrics)

**Introduced in R2017a**

## Number of Local Static Variables

Total number of local static variables in function

### Description

This metric provides the number of local static variables in a function.

### Examples

#### Number of Static Variables

```
void func(void) {  
    static int var_1 = 0;  
    int var_2;  
}
```

In this example, the number of static variables in `func` is 1. For examples of different types of variables, see [Number of Local Non-Static Variables](#).

### Metric Information

**Group:** Function

**Acronym:** LOCAL\_STATIC\_VARS

**HIS Metric:** No

### See Also

[Higher Estimate of Local Variable Size](#) | [Number of Local Non-Static Variables](#) | [Calculate code metrics \(-code-metrics\)](#)

**Introduced in R2017a**

# Number of Paths

Estimated static path count

## Description

This metric measures the number of paths in a function.

If `goto` statements are present in your code, Polyspace cannot calculate the number of paths. The software displays a metric value of -1.

The recommended upper limit for this metric is 80. If the number of paths is high, the code is difficult to read and can cause more orange checks. Try to limit the value of this metric.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Computation Details

The number of paths is calculated according to these rules:

- If the statements in a function do not break the control flow, the number of paths is one.

Even an empty statement such as `;` or empty block such as `{}` counts as one path.

- The number of paths for a control flow statement is calculated as follows:
  - `if-else if-else`: The number of paths is the sum of paths calculated in the `if` block, each `else if` block, and the concluding `else` block. When the concluding `else` block is omitted, the path count is increased by 1.

For instance, the statement `if(..) {} else if(..) {} else {}` counts as three paths. The statement `if() {}` counts as two paths, one for the `if` block and one for the omitted `else` block.

- `switch-case`: Every `case` with `break` statement adds one to the path count. The `default` statement counts as one path, even if it is omitted.

For instance, the statement `switch (var) { case 1: .. break; case 2: .. break; default: .. }` counts as three paths.

- `for`, `while`, and `do-while`: The number of paths is equal to the number of paths in the loop body + 1.

For instance, the statement `while(0) {;}`  counts as two paths.

- Ternary operators: A statement with a ternary operator such as

```
result = a > b ? a : b;
```

is counted as one statement that does not break the control flow. The number of paths is considered as one.

- If more than one control flow statement are present in a sequence, the number of paths is the product of the path count for each control flow statement.

For instance, if a function has three `for` loops and two `if-else` statements, the number of paths is  $2 \times 2 \times 2 \times 2 \times 2 = 32$ .

If many control flow statements are present in a function, the number of paths can be large. Nested control flow statements reduce the number of paths at the cost of increasing the depth of nesting. For an example, see “Function with Nested Control Flow Statements” on page 8-59.

## Examples

### Function with One Path

```
void func(int ch) {  
    switch (ch)  
    {  
        case 1:  
        case 2:  
        case 3:  
        case 4:  
        default:  
    }  
}
```

In this example, `func` has one path.

## Function with Control Flow Statement Causing Multiple Paths

```
void func(int ch) {
    switch (ch)
    {
        case 1:
            break;
        case 2:
            break;
        case 3:
            break;
        case 4:
            break;
        default:
    }
}
```

In this example, `func` has five paths. Apart from the path that goes through the cases and `default`, each `break` causes the creation of a new path.

## Function with Nested Control Flow Statements

```
void func()
{
    int i = 0, j = 0, k = 0;
    for (i=0; i<10; i++)
    {
        for (j=0; j<10; j++)
        {
            for (k=0; k<10; k++)
            {
                if (i < 2 )
                    ;
                else
                {
                    if (i > 5)
                        ;
                    else
                        ;
                }
            }
        }
    }
}
```

In this example, `func` has six paths. The number is calculated as follows:

- The innermost `if-else` block counts as two paths.
- The outer `if-else` block counts as three paths, one path for the `if` block and the previous two paths for the `else` block.
- The innermost `for` loop counts as four paths, one path for the loop and the previous three paths for the `if-else` blocks.
- The next two outer loops add one path each.

Therefore, the number of paths in `func` is six.

## Metric Information

**Group:** Function

**Acronym:** PATH

**HIS Metric:** Yes

## See Also

Calculate code metrics (`-code-metrics`)

# Number of Return Statements

Number of return statements in a function

## Description

This metric measures the number of return statements in a function.

The recommended upper limit for this metric is 1. If one return statement is present, when reading the code, you can easily identify what the function returns.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Examples

### Function with Return Points

```
int getSign (int arg) {  
    if(arg <0)  
        return -1;  
    else if(arg > 0)  
        return 1;  
    return 0;  
}
```

In this example, `getSign` has 3 return statements.

## Metric Information

**Group:** Function

**Acronym:** RETURN

**HIS Metric:** Yes

## See Also

Calculate code metrics (`-code-metrics`)

**Topics**

“Compute Code Complexity Metrics” (Polyspace Code Prover)

“Compare Metrics Against Software Quality Objectives” (Polyspace Code Prover)

# Number of Recursions

Number of call graph cycles over one or more functions

## Description

This metric specifies the number of recursions in your project. Even if more than one function is involved in one recursive cycle, the number of recursions is counted as one.

Calls through a function pointer are not considered.

The recommended upper limit for this metric is 0. To avoid the possibility of exceeding available stack space, do not use recursions in your code. To detect use of recursions, check for violations of MISRA C:2012 Rule 17.2.

To enforce limits on metrics, see “Compute Code Complexity Metrics”.

## Examples

### Direct Recursion

```
int getVal(void);

void main() {
    int count = getVal(), total;
    assert(count > 0 && count <100);
    total = sum(count);
}

int sum(int val) {
    if(val<0)
        return 0;
    else
        return (val + sum(val-1));
}
```

In this example, the number of recursions is 1.

A direct recursion is a recursion where a function calls itself in its own body. For direct recursions, the number of recursions is equal to the number of recursive functions.

## Indirect Recursion with One Call Graph Cycle

```
volatile int signal;

void operation1() {
    int stop = signal%2;
    if(!stop)
        operation2();
}

void operation2() {
    operation1();
}

void main() {
    operation1();
}
```

In this example, the number of recursions is 1. Although two functions `operation1` and `operation2` indirectly call themselves, they are involved in the same call graph cycle `operation1 → operation2 → operation1`.

An indirect function is a recursion where a function calls itself through other functions. For indirect recursions, the number of recursions can be different from the number of recursive functions.

## Indirect Recursion with Two Call Graph Cycles

```
volatile int signal;

void operation1() {
    int stop = signal%3;
    if(stop==1)
        operation2();
    else if(stop==2)
        operation3();
}

void operation2() {
```

```
    operation1();
}

void operation3() {
    operation3();
}

void main() {
    operation1();
}
```

In this example, the number of recursions is 2.

There are two call graph cycles:

- operation1 → operation2 → operation1
- operation1 → operation3 → operation1

## Same Function Called in Direct and Indirect Recursion

```
volatile int signal;

void operation1() {
    int stop = signal%3;
    if(stop==1)
        operation1();
    else if(stop==2)
        operation2();
}

void operation2() {
    operation1();
}

void main() {
    operation1();
}
```

In this example, the number of call graph cycles is 1.

If the same function calls itself both directly and indirectly, the two cycles are counted as 1.

## **Metric Information**

**Group:** Project

**Acronym:** AP\_CG\_CYCLE

**HIS Metric:** Yes

## **See Also**

MISRA C:2012 Rule 17.2 | Calculate code metrics (-code-metrics)

# **Polyspace Report Components — Alphabetical List**

---

## **Acronym Definitions**

Create table of Polyspace acronyms used in report and their full forms

### **Description**

This component creates a table containing the acronyms used in the report and their full forms. Acronyms are used for Polyspace checks and result status.

### **See Also**

#### **Topics**

“Customize Existing Bug Finder Report Template”

# Call Hierarchy

Create table showing call graph in source code

## Description

This component creates a table showing the call hierarchy in your source code. For each function call in your source code, the table displays the following information:

- Level of call hierarchy, where the function is called.

Each level is denoted by |. If a function call appears in the table as ||| -> *file\_name.function\_name*, the function call occurs at the third level of the hierarchy. Beginning from `main` or an entry point, there are three function calls leading to the current call.

- File containing the function call.

In Code Prover, the line and column is also displayed.

- File containing the function definition.

In Code Prover, the line and column where the function definition begins is also displayed.

In addition, the table also displays uncalled functions.

This table captures the information available on the **Call Hierarchy** pane in the Polyspace user interface.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”

## Code and Verification Information

Create table of verification times and code characteristics

### Description

This component creates tables containing verification times and code characteristics such as number of lines.

### Properties

#### Include Verification Time Information

If you select this option, the report contains verification times broken down by phase.

- For Polyspace Bug Finder, the phases are `compilation`, `pass0`, `pass1`, etc.
- For Polyspace Code Prover, the phases are `compilation`, `global`, `function`, etc.

#### Include Code Details

If you select this option, the report contains the following code characteristics:

- Number of files
- Number of lines
- Number of lines without comment

### See Also

#### Topics

“Customize Existing Bug Finder Report Template”

# Code Metrics Details

Create table of Polyspace metrics broken down by file and function

## Description

This component creates a table containing metrics from a Polyspace project. The metrics appear broken down by file and function.

## Properties

### Project Metrics

If you select this option, the report contains the following metrics about the project:

- Number of direct recursions
- Number of files
- Number of headers
- Number of protected and unprotected shared variables

### File Metrics

If you select this option, the report contains the following metrics about each file in the project:

- Estimated function coupling
- Lines without comment
- Comment density
- Total lines

### Function Metrics

If you select this option, the report contains the following metrics about each function in the project:

- Cyclomatic complexity
- Language scope
- Lower and higher estimates of local variable size
- Number of lines within body
- Number of executable lines
- Number of `goto` statements
- Number of call levels
- Number of called functions
- Number of call occurrences
- Number of function parameters
- Number of paths
- Number of return statements
- Number of instructions
- Number of calling functions

## **See Also**

### **Topics**

“Customize Existing Bug Finder Report Template”

# Code Metrics Summary

Create table of Polyspace metrics

## Description

This component creates a table containing metrics from a Polyspace project. The metrics are the same as those displayed under `Code Metrics Details`. However, the file and function metrics are not broken down by individual files and functions. Instead, the table provides the minimum and maximum value of a file metric over all files and a function metric over all functions.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”

## Code Verification Summary

Create table of Polyspace analysis results

### Description

This component creates tables containing the following results:

- Number of results
- Number of coding rule violations for each coding rule type such as MISRA C
- Number of defects, for Polyspace Bug Finder results
- Number of checks of each color, for Polyspace Code Prover results
- Whether the project passed or failed the software quality objective

### Properties

#### Include Checks from Polyspace Standard Library Stub Functions

Unless you deselect this option, the tables contain Polyspace Code Prover checks that appear in Polyspace stubs for the standard library functions.

### See Also

#### Topics

“Customize Existing Bug Finder Report Template”

# Coding Rules Details

Create table of coding rule violations broken down by file

## Description

This component creates tables containing coding rule violations broken down by each file in the Polyspace project. For each rule violation, the table contains the following information:

- Rule number
- Rule description
- Function containing the violation
- (Code Prover only) Line and column number
- Review information such as classification, status and comments

## Properties

### Select Coding Rules Type

Using this option, you can choose which coding rule violations to display. You can display violations for the following set of coding rules:

- MISRA C rules
- MISRA AC AGC rules
- MISRA C++ rules
- JSF C++ rules
- Custom coding rules

### Display by

Using this option, you can break down the display of coding rule violations by file.

## **See Also**

### **Topics**

“Customize Existing Bug Finder Report Template”

# Coding Rules Summary

Create table with number of coding rule violations

## Description

This component creates a table containing the number of coding rule violations. You can choose whether to break this information down by rule number or file.

## Properties

### Select Coding Rules Type

Using this option, you can choose which coding rule violations to display. You can display violations for the following set of coding rules:

- MISRA C rules
- MISRA AC AGC rules
- MISRA C++ rules
- JSF C++ rules
- Custom coding rules

### Include Files/Rules with No Problems Detected

If you select this option, the table displays:

- Files that do not contain coding rule violations
- Rules that your code does not violate

### Display by

Using this option, you can break down the display of coding rule violations by:

- Rule number
- File

## **See Also**

### **Topics**

“Customize Existing Bug Finder Report Template”

# Configuration Parameters

Create table of analysis options, assumptions and coding rules configuration

## Description

This component creates the following tables:

- *Polyspace settings*: The analysis options that you used to obtain your results. The table lists command-line version of the options along with their values.
- *Analysis assumptions*: The assumptions used to obtain your Code Prover results. The table lists only the modifiable assumptions. For assumptions that you cannot change, see the Polyspace documentation.
- *Coding rules configuration*: The coding rules whose violations you checked for. The table lists the rule number, rule description and other information about the rules.
- *Files with compilation errors*: If your project has source files with compilation errors, these files are listed.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”

## **Defects Summary**

Create table of defects (Bug Finder only)

### **Description**

This component creates a table of Polyspace Bug Finder defects. From this table, you can see the number of defects of each type.

### **Properties**

#### **Include Checkers with No Defects Detected**

If you select this option, the table includes all defect types that Polyspace Bug Finder can detect, including those that do not occur in your code.

### **See Also**

#### **Topics**

“Customize Existing Bug Finder Report Template”

# Global Variable Checks

Create table of global variables (Code Prover only)

## Description

This component creates a table of Polyspace Code Prover global variables. From this table, you can see the number of global variables of each type.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”

## **Recursive Functions**

Create table of recursive functions

### **Description**

This component creates a table containing the recursive functions in your source code. For each recursive function, the table lists its immediate caller.

### **See Also**

#### **Topics**

“Customize Existing Bug Finder Report Template”

# Report Customization (Filtering)

Create filters that apply to your Polyspace reports

## Description

This component allows you to filter unwanted information from existing Polyspace report templates. To apply global filters, place this component immediately below the node representing the report name.

## Properties

### Code Metrics Filters

The properties in table below apply to the inclusion of code metrics in your report.

Property	Purpose	User Action
<b>Include Project Metrics</b>	Choose whether to include metrics about your Polyspace project.	Select the check box to include project metrics.
<b>Project metrics to include</b>	Specify project metrics to include or exclude from report.	Enter a MATLAB regular expression.
<b>Include File Metrics</b>	Choose whether to include per file metrics in report.	Select the check box to include per file metrics.
<b>File Metrics &gt; Files to include</b>	Specify files to include or exclude when reporting file metrics.	Enter a MATLAB regular expression.
<b>File metrics to include</b>	Specify file metrics to include or exclude from report.	Enter a MATLAB regular expression.

Property	Purpose	User Action
<b>Include Function Metrics</b>	Choose whether to include per function metrics in report.	Select the check box to include per function metrics.
<b>Function Metrics &gt; Files to include</b>	Specify files to include or exclude when reporting function metrics.	Enter a MATLAB regular expression.
<b>Functions to include</b>	Specify functions to include or exclude when reporting function metrics.	Enter a MATLAB regular expression.
<b>Function metrics to include</b>	Specify function metrics to include or exclude from report.	Enter a MATLAB regular expression.

## Coding Rules Filters

The properties in table below apply to the inclusion of coding rule violations in your report.

Property	Purpose	User Action
<b>Files to include</b>	Specify files to include or exclude when reporting coding rule violations.	Enter a MATLAB regular expression.
<b>Coding rule numbers to include</b>	Specify coding rules to include or exclude when reporting coding rule violations.	Enter a MATLAB regular expression.
<b>Classifications to include</b>	Specify classifications to include or exclude when reporting coding rule violations.	Enter a MATLAB regular expression.
<b>Status types to include</b>	Specify statuses to include or exclude when reporting coding rule violations.	Enter a MATLAB regular expression.

## Run-time Check Filters

The properties in table below apply to the inclusion of Polyspace Code Prover checks in your report.

Property	Purpose
<b>Red Checks</b>	Specify whether to include red checks in your report. Red checks indicate proven run-time errors.
<b>Gray Checks</b>	Specify whether to include gray checks in your report. Gray checks indicate unreachable code.
<b>Orange Checks</b>	Specify whether to include orange checks in your report. Orange checks indicate possible run-time errors.
<b>Green Checks</b>	Specify whether to include green checks in your report. Green checks indicate that an operation does not contain a specific run-time error.
<b>Inspection Point Checks</b>	Specify whether to include inspection point checks in your report. These checks allow an user to find the values that a variable can take at a certain point in the code.
<b>Unreachable Functions</b>	Specify whether to include unreachable functions in your report.

## Advanced Filters

The properties in table below apply to the inclusion of metrics, coding rule violations and Polyspace Code Prover checks in your report.

Property	Purpose	User Action
<b>Justification status</b>	Choose whether to report only justified checks, only unjustified checks or all checks.	Choose an option from the dropdown list.

<b>Property</b>	<b>Purpose</b>	<b>User Action</b>
<b>Files to include</b>	Specify files to include or exclude from your report.	Enter a MATLAB regular expression.
<b>Check types to include</b>	Specify Polyspace Code Prover checks to include in your report.	Enter a MATLAB regular expression.
<b>Function names to include</b>	Specify functions to include or exclude from your report.	Enter a MATLAB regular expression.
<b>Classification types to include</b>	Specify classifications to include or exclude from your report.	Enter a MATLAB regular expression.
<b>Status types to include</b>	Specify statuses to include or exclude from your report.	Enter a MATLAB regular expression.
<b>Comments to include</b>	Specify comments to include or exclude from your report.	Enter a MATLAB regular expression.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”  
 “Regular Expressions” (MATLAB)

# Run-time Checks Details Ordered by Color/ File

Create overrides for global filters reports (Code Prover only)

## Description

This component adds detailed information about the run-time checks to your report. This component can also be used to override global filters in specific chapters of your report. Use the following workflow when using filters in your report:

- 1 To create filters that apply to all chapters of your report, use the **Report Customization (Filtering)** component. For more information, see [Report Customization \(Filtering\)](#).
- 2 To override some of the filters in individual chapters, use the **Run-time Checks Details Ordered by Color/File** component. Select the **Override Global Report filter** box.

## Properties

### Categories To Include

The properties in table below apply to the inclusion of Polyspace Code Prover checks in your report.

Property	Purpose
<b>Red Checks</b>	Specify whether to include red checks in your report. Red checks indicate proven run-time errors.
<b>Gray Checks</b>	Specify whether to include gray checks in your report. Gray checks indicate unreachable code.

Property	Purpose
<b>Orange Checks</b>	Specify whether to include orange checks in your report. Orange checks indicate possible run-time errors.
<b>Green Checks</b>	Specify whether to include green checks in your report. Green checks indicate that an operation does not contain a specific run-time error.
<b>Inspection Point Checks</b>	Specify whether to include inspection point checks in your report. These checks allow an user to find the values that a variable can take at a certain point in the code.
<b>Unreachable Functions</b>	Specify whether to include unreachable functions in your report.

## Advanced Filters

The properties in table below apply to the inclusion of metrics, coding rule violations and Polyspace Code Prover checks in your report.

Property	Purpose	User Action
<b>Justification status</b>	Choose whether to report only justified checks, only unjustified checks or all checks.	Choose an option from the dropdown list.
<b>Files to include</b>	Specify files to include or exclude from your report.	Enter a regular MATLAB expression.
<b>Check types to include</b>	Specify Polyspace Code Prover checks to include in your report.	Enter a regular MATLAB expression.
<b>Function names to include</b>	Specify functions to include or exclude from your report.	Enter a regular MATLAB expression.
<b>Classification types to include</b>	Specify classifications to include or exclude from your report.	Enter a regular MATLAB expression.

<b>Property</b>	<b>Purpose</b>	<b>User Action</b>
<b>Status types to include</b>	Specify statuses to include or exclude from your report.	Enter a regular MATLAB expression.
<b>Comments to include</b>	Specify comments to include or exclude from your report.	Enter a regular MATLAB expression.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”

## Run-time Checks Details Ordered by Review Information

Create table with checks ordered by review information (Code Prover only)

### Description

This component creates tables displaying the Polyspace Code Prover checks in your code. All checks with same combination of **Severity** and **Status** appear in the same table.

### See Also

#### Topics

“Customize Existing Bug Finder Report Template”

# Run-time Checks Summary Ordered by File

Create table with checks ordered by file (Code Prover only)

## Description

This component creates a table displaying the number of Polyspace Code Prover checks per file in your code.

## Properties

### Sort the data

Use this option to sort the rows in the table alphabetically by filename or by percentage of unproven code.

### Display as

Use this option to display the number of checks in a table or in bar charts.

### Display ratio of checks in a file

Select this option to display the number of checks of a certain color as a ratio of total number of checks in the file.

### Include checks from Polyspace standard library stub functions

Select this option to include the checks from Polyspace standard library stub functions in your display.

## **See Also**

### **Topics**

“Customize Existing Bug Finder Report Template”

# Software Quality Objectives - Coding Rules Summary

Create table of coding rule violations in results downloaded from Polyspace Metrics

## Description

This component creates a table containing coding rule violations in results downloaded from Polyspace Metrics.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”

## Software Quality Objectives - Run-time Checks Details

Create table of run-time check distribution in results downloaded from Polyspace Metrics

### Description

This component creates tables showing run-time checks in results downloaded from Polyspace Metrics.

The component `Software Quality Objectives - Run-time Checks Summary` shows the distribution of run-time checks. This component shows individual instances of run-time checks. Each file has a dedicated table showing the run-time checks in the file.

### See Also

#### Topics

“Customize Existing Bug Finder Report Template”

# Software Quality Objectives - Run-time Checks Summary

Create table of run-time check distribution in results downloaded from Polyspace Metrics

## Description

This component creates a table showing the distribution of run-time checks in results downloaded from Polyspace Metrics.

This component shows the distribution of run-time checks. The component `Software Quality Objectives - Run-time Checks Details` shows the individual instances of run-time checks.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”

## **Summary By File**

Create table showing summary of Polyspace results by file

### **Description**

This component creates a table showing a breakdown of Polyspace results by file.

### **See Also**

#### **Topics**

“Customize Existing Bug Finder Report Template”

# Variable Access

Create table showing global variable access in source code (Code Prover only)

## Description

This component creates a table showing the global variable access in your source code. For each global variable, the table displays the following information:

- Variable name.

The entry for each variable is denoted by |.

- Type of the variable.
- Number of read and write operations on the variable.
- Details of read and write operations. For each read or write operation, the table displays the following information:
  - File and function containing the operation in the form *file\_name.function\_name*.

The entry for each read or write operation is denoted by | |. Write operations are denoted by < and read operations by >.

- Line and column number of the operation.

This table captures the information available on the **Variable Access** pane in the Polyspace user interface.

## See Also

### Topics

“Customize Existing Bug Finder Report Template”

## Variable Checks Details Ordered By Review Information

Create table with global variable results ordered by review information (Code Prover only)

### Description

This component creates tables displaying the Polyspace Code Prover global variable results in your code. All checks with same combination of **Severity** and **Status** appear in the same table.

### See Also

#### Topics

“Customize Existing Bug Finder Report Template”

# Configuration Parameters

---

- “Product mode” on page 10-2
- “Settings from (C)” on page 10-3
- “Settings from (C++)” on page 10-5
- “Use custom project file” on page 10-7
- “Project configuration” on page 10-8
- “Enable additional file list” on page 10-9
- “Stub lookup tables” on page 10-10
- “Input” on page 10-12
- “Tunable parameters” on page 10-13
- “Output” on page 10-14
- “Model reference verification depth” on page 10-15
- “Model by model verification” on page 10-17
- “Output folder” on page 10-18
- “Make output folder name unique by adding a suffix” on page 10-19
- “Add results to current Simulink project” on page 10-20
- “Open results automatically after verification” on page 10-21
- “Check configuration before verification” on page 10-22
- “Verify all occurrences” on page 10-23

# Product mode

Select type of Polyspace code analysis to run.

**Model Configuration Parameters Category:** Polyspace

## Settings

**Default:** Code Prover

Code Prover

Run a Polyspace Code Prover verification.

Bug Finder

Run a Polyspace Bug Finder analysis.

## Dependency

You see only the products for which you have a license. If you do not have a Polyspace Code Prover license, the default product mode is Bug Finder.

## Command-Line Information

Use the `pslinkoptions` property `VerificationMode`.

## See Also

`pslinkoptions` | `pslinkoptions`

## Related Examples

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Settings from (C)

Select settings for the analysis configuration. You can quickly activate coding rules checking for generated C code

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Project configuration

Project configuration

Run Polyspace with the options specified in the “Project configuration” on page 10-8 or “Use custom project file” on page 10-7.

You do not check coding rules unless you select a rule set in the configuration.

Project configuration and MISRA AC AGC checking

Run Polyspace with the options specified in the **Project configuration** plus MISRA AC-AGC obligatory and recommended rules.

Project configuration and MISRA C 2004 checking

Run Polyspace with the options specified in the **Project configuration** plus all MISRA C 2004 rules.

Project configuration and MISRA C 2012 checking

Run Polyspace with the options specified in the **Project configuration** plus all MISRA C 2012 rules. This option automatically applies the rule categories for generated code. See `Use generated code requirements (-misra3-agc-mode)`.

MISRA AC AGC checking

Check compliance with the MISRA AC-AGC obligatory and recommended rules. After rules checking, Polyspace stops.

MISRA C 2004 checking

Check compliance with all MISRA C 2004 rules. After rules checking, Polyspace stops.

MISRA C 2012 checking

Check compliance with all MISRA C 2012 rules. This option automatically applies the rule categories for generated code. See `Use generated code requirements (-misra3-agc-mode)`. After rules checking, Polyspace stops.

### Dependency

This setting overrides custom configuration settings in “Project configuration” on page 10-8 and “Use custom project file” on page 10-7. If you want to use your custom coding rule settings, select the `Project configuration` option.

### Command-Line Information

Use the `pslinkoptions` property `VerificationSettings`.

### See Also

`pslinkoptions` | `pslinkoptions`

### Related Examples

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Settings from (C++)

Select settings for the analysis configuration. This option allows you to quickly activate coding rules checking for generated C++ code.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Project configuration

Project configuration

Run Polyspace with the options specified in the “Project configuration” on page 10-8 or “Use custom project file” on page 10-7.

You do not check coding rules unless you select a rule set in the configuration.

Project configuration and MISRA C++ checking

Run Polyspace with the options specified in the **Project configuration** plus MISRA C++ required rules.

Project configuration and JSF C++ checking

Run Polyspace with the options specified in the **Project configuration** plus JSF C++ shall rules.

MISRA C++ checking

Check compliance with the MISRA C++: 2008 required rules. After rules checking, Polyspace stops.

JSF C++ checking

Check compliance with the JSF C++ shall rules. After rules checking, Polyspace stops.

### Dependency

This setting overrides custom configuration settings in “Project configuration” on page 10-8 and “Use custom project file” on page 10-7. If you want to use your custom coding rule settings, select the Project configuration option.

### Command-Line Information

Use the `pslinkoptions` property `CxxVerificationSettings`.

### See Also

`pslinkoptions` | `pslinkoptions`

### Related Examples

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Use custom project file

Set Polyspace configuration options with a custom `.psprj` file

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Off

Off

Analysis uses configuration options from **Project configuration** on page 10-8 parameters.

On

Analysis uses configuration options from the specified `.psprj` project file.

### Dependency

The **Settings from** parameter overrides custom configuration settings for coding rules. If you want to use your custom coding rule settings, set **Settings from > Project configuration**.

### Command-Line Information

Use the `pslinkoptions` properties `EnablePrjConfigFile` and `PrjConfigFile`. For details, see `pslinkoptions`.

### See Also

`pslinkoptions` | `pslinkoptions`

### Related Examples

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

# Project configuration

Set advanced configuration options to customize the analysis.

## Settings

Open the Polyspace Configuration window by using the **Configure** button. Customize additional settings in this window and save your project configuration. If you added a custom project file in the parameter “Use custom project file” on page 10-7, that project file configuration is shown. Otherwise, the default project template is used.

For details about the advanced options, see “Analysis Options”.

## Dependency

The **Settings from** parameter overrides custom configuration settings for coding rules. If you want to use your custom coding rule settings, set **Settings from > Project configuration**.

## Command-Line Information

Use `polyspace.ModelLinkBugFinderOptions` with the `pslinkoptions` properties `EnablePrjConfigFile` and `PrjConfigFile`.

## See Also

`polyspace.ModelLinkBugFinderOptions` | `pslinkoptions` | `pslinkoptions`

## More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Enable additional file list

Add additional supporting code files to the analysis.

For instance, suppose you use C files for testing results from the generated code or providing inputs to the generated code. The analysis of generated code only considers files generated from the Simulink model. If you want the analysis to consider the C files that you use for testing or inputs, provide them as additional files.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Off

Off

The analysis includes no additional files.

On

Polyspace analyzes the specified C/C++ files with the generated code. Use the **Select files** button to specify these additional files.

### Command-Line Information

Use the `pslinkoptions` properties `EnableAdditionalFileList` and `AdditionalFileList`.

### See Also

`pslinkoptions` | `pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Stub lookup tables

Specify that the verification must stub auto-generated functions that use certain kinds of lookup tables in their body. The lookup tables in these functions use linear interpolation and do not allow extrapolation. That is, the result of using the lookup table always lies between the lower and upper bounds of the table.

If you use this option, the verification is more precise and has fewer orange checks. The verification of lookup table functions is usually imprecise. The software has to make certain assumptions about these functions. To avoid missing a run-time error, the verification assumes that the result of using the lookup table is within the full range allowed by the result data type. This assumption can cause many unproven results (orange checks) when a lookup table function is called. By using this option, you narrow down the assumption. For functions using lookup tables with linear interpolation and no extrapolation, the result is at least within the bounds of the table.

The option is relevant only if your model uses Lookup Table blocks.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** On

On

For autogenerated functions that use lookup tables with linear interpolation and no extrapolation, the verification:

- Does not check for run-time errors in the function body.
- Calls a function stub instead of the actual function at the function call sites. The stub ensures that the result of using the lookup table is within the bounds of the table.

To identify if the lookup table in the function uses linear interpolation and no extrapolation, the verification uses information provided by the code generation product. For instance, if you use Embedded Coder to generate code, the lookup table functions with linear interpolation and no extrapolation follow specific naming conventions.

Off

The verification does not stub autogenerated functions that use lookup tables.

## Tips

- The option applies only to autogenerated functions. If you integrate your own C/C++ S-Function using lookup tables with the model, the option does not cause them to be stubbed.
- The option is on by default. For certification purposes, if you want your verification tool to be independent of the code generation tool, turn off the option.

## Command-Line Information

Use the `pslinkoptions` property `AutoStubLUT`.

## See Also

`pslinkoptions` | `pslinkoptions`

## More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

# Input

Choose whether to constrain Inport block variables.

**Model Configuration Parameters Category:** Polyspace

## Settings

**Default:** Use specified minimum and maximum values

Use specified minimum and maximum values

Analysis assumes minimum and maximum values for input variables. These values are specified in the Inport block dialog box. Use this value to reduce the number of false positive results.

Unbounded inputs

Analysis assumes full range for input variables. Use this value to run a robust analysis that includes values outside the expected range.

## Command-Line Information

Use the `pslinkoptions` property `InputRangeMode`.

## See Also

`pslinkoptions` | `pslinkoptions`

## More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”
- “External Constraints on Polyspace Analysis of Generated Code”

## Tunable parameters

Choose how to treat tunable parameter values during the analysis. Treat values as either constants or a range of values.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Use calibration data

Use calibration data

Analysis assumes constant values for tunable parameters. Use this value to run a contextual analysis. This option can reduce the number of false positive results.

Use specified minimum and maximum values

Analysis assumes a range of values for the tunable parameter variables. Specify maximum and minimum values in the model. Use this option to run a robust analysis that includes values outside the expected parameter value.

### Command-Line Information

Use the `pslinkoptions` property `ParamRangeMode`.

### See Also

`pslinkoptions` | `pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”
- “External Constraints on Polyspace Analysis of Generated Code”

## Output

Choose whether to verify output values.

Code Prover option only. Bug Finder cannot check output values.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** No verification

No verification

Polyspace does not verify output values.

Verify outputs are within minimum and maximum values

Polyspace checks to see if the output variable values are within the expected minimum and maximum values. Specify the minimum and maximum values in the output block dialog boxes.

### Command-Line Information

Use the `pslinkoptions` property `OutputRangeMode`.

### See Also

`pslinkoptions` | `pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”
- “External Constraints on Polyspace Analysis of Generated Code”

## Model reference verification depth

Only for models that use Embedded Coder generated code. Indicate how deep into the model hierarchy to analyze.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Current model only

Current model only

Polyspace analyzes only the current model

1

Polyspace analyzes the current model and the referenced models that are one level below the current model.

2

Polyspace analyzes the current model and the referenced models that are up to two levels below the current model.

3

Polyspace analyzes the current model and the referenced models that are up to three levels below the current model.

All

Polyspace analyzes the current model and all referenced models.

### Command-Line Information

Use the `pslinkoptions` property `ModelRefVerifDepth`.

### See Also

`pslinkoptions` | `pslinkoptions`

### **More About**

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Model by model verification

Only for models that use Embedded Coder generated code. Analyze each model or referenced model individually. If you have a large project, this option can help modularize your analysis .

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Off

Off

Polyspace analyzes your models together. Model interactions are analyzed.

On

Polyspace analyzes your model and each of its referenced models in isolation. This option does not analyze model interactions.

### Command-Line Information

Use the `pslinkoptions` property `ModelRefByModelRefVerif`.

### See Also

[pslinkoptions](#) | [pslinkoptions](#)

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Output folder

Specify the location and folder name for your analysis results.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** results\_\$(modelName)

Enter a path for your results folder. If you do not use a full path, the results folder is relative to your current MATLAB folder.

If you select “Add results to current Simulink project” on page 10-20, the results folder is relative to the Simulink project folder.

By default, the software stores your results in *Current Folder*\results\_model\_name.

### Command-Line Information

Use the `pslinkoptions` property `ResultDir`.

### See Also

`pslinkoptions` | `pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Make output folder name unique by adding a suffix

Add a unique suffix to the results folder for every run to avoid overwriting previous results.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Off

Off

Every time you rerun your analysis, your results are overwritten.

On

For each run of the analysis, Polyspace specifies a new location for the results folder by appending a unique number to the folder name.

### Command-Line Information

Use the `pslinkoptions` property `AddSuffixToResultDir`.

### See Also

`pslinkoptions` | `pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Add results to current Simulink project

Add your Polyspace results to the current Simulink project. To use this option, you must have a Simulink project open.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Off

Off

Results are saved to the current folder.

On

Results are saved to the currently open Simulink project.

### Dependencies

You must have a Simulink project open to use this option.

### Command-Line Information

Use the `pslinkoptions` property `AddToSimulinkProject`.

### See Also

`pslinkoptions` | `pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Open results automatically after verification

Decide whether to open your results in the Polyspace interface after running analysis from Simulink.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** On

On

After you run an analysis, your results open automatically in the Polyspace interface.

Off

You must manually open your results after running an analysis.

### Command-Line Information

Use the `pslinkoptions` property `OpenProjectManager`.

### See Also

`pslinkoptions` | `pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Check configuration before verification

Check whether model and code configurations are optimal for code analysis.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** On (proceed with warnings)

On (proceed with warnings)

The process stops for errors, but continues the code analysis if the configuration has only warnings.

On (stop for warnings)

If the configuration has errors or warnings, the process stops.

Off

The software does not check the configuration.

### Command-Line Information

Use the `pslinkoptions` property `CheckConfigBeforeAnalysis`. For details, see `pslinkoptions`.

### See Also

`pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”

## Verify all occurrences

For S-Function analyses only. Run an analysis on all instances of the selected S-Function.

**Model Configuration Parameters Category:** Polyspace

### Settings

**Default:** Off

Off

Analyze only the selected S-Function block. The analysis includes only information from the selected S-Function block.

On

Analyze all occurrences of the S-function in the model. If the S-Function is included in the model multiple times, information from all occurrences is included in the analysis.

### Command-Line Information

Use the `pslinkoptions` property `VerifALLSFcnInstances`.

### See Also

`pslinkoptions` | `pslinkoptions`

### More About

- “Run Polyspace Analysis on Code Generated with Embedded Coder”



# Approximations Used During Bug Finder Analysis

---

## Inputs in Polyspace Bug Finder

A Bug Finder analysis does not return a defect caused by a special value of an unknown input, unless the input is bounded. Polyspace makes no assumption about the value of unbounded inputs when your source code is incomplete. For example, in the following code Bug Finder detects a **division by zero** in `foo_1()`, but not in `foo_2()`:

```
int foo_1(int p)
{
    int x = 0;
    if ( p > -10 && p < 10 ) /* p is bounded by if statement */
        x = 100/p;      /* Division by zero detected */

    return x;
}

int foo_2(int p) /* p is unbounded */
{
    int x = 0;
    x = 100/p;    /* Division by zero not detected */

    return x;
}
```

---

**Note** To set bounds on your input, add constraints in your code such as `assert` or `if`.

---

### See Also

“Global Variables in Polyspace Bug Finder” on page 11-3 | “Bug Finder Analysis Assumptions”

## Global Variables in Polyspace Bug Finder

When you run a Bug Finder analysis, Polyspace makes certain assumptions about the initialization of global variables. These assumptions depend on how you declare and define global variables. For example, in this code

```
int foo(void) {  
    return 1/gvar;  
}
```

Bug Finder detects a **division by zero** defect with the variable `gvar` in these cases:

- You define `int gvar;` in the source code and provide a `main` function that calls `foo`. Bug Finder follows ANSI standards that state the variable is initialized to zero.
- You define `int gvar;` or declare `extern int gvar;` in the source code. Another function calls `foo` and sets `gvar=0`. Otherwise, when your source files are incomplete and do not contain a `main` function, Bug Finder makes no assumption about the initialization of `gvar`.
- You declare `const int gvar;`. Bug Finder assumes `gvar` is initialized to zero due to the `const` keyword.

### See Also

“Inputs in Polyspace Bug Finder” on page 11-2 | “Bug Finder Analysis Assumptions”

