

Model-Based Calibration Toolbox™

Reference



MATLAB® & SIMULINK®

R2020b



How to Contact MathWorks



Latest news: www.mathworks.com
Sales and services: www.mathworks.com/sales_and_services
User community: www.mathworks.com/matlabcentral
Technical support: www.mathworks.com/support/contact_us



Phone: 508-647-7000



The MathWorks, Inc.
1 Apple Hill Drive
Natick, MA 01760-2098

Model-Based Calibration Toolbox™ Reference

© COPYRIGHT 2005–2020 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

November 2005	Online only	New for Version 3.0 (Release 14SP3+)
September 2006	Online only	Version 3.1 (Release 2006b)
March 2007	Online only	Version 3.2 (Release 2007a)
September 2007	Online only	Revised for Version 3.3 (Release 2007b)
March 2008	Online only	Revised for Version 3.4 (Release 2008a)
October 2008	Online only	Revised for Version 3.4.1 (Release 2008a+)
October 2008	Online only	Revised for Version 3.5 (Release 2008b)
March 2009	Online only	Revised for Version 3.6 (Release 2009a)
September 2009	Online only	Revised for Version 3.7 (Release 2009b)
March 2010	Online only	Revised for Version 4.0 (Release 2010a)
September 2010	Online only	Revised for Version 4.1 (Release 2010b)
April 2011	Online only	Revised for Version 4.2 (Release 2011a)
September 2011	Online only	Revised for Version 4.3 (Release 2011b)
March 2012	Online only	Revised for Version 4.4 (Release 2012a)
September 2012	Online only	Revised for Version 4.5 (Release 2012b)
March 2013	Online only	Revised for Version 4.6 (Release 2013a)
September 2013	Online only	Revised for Version 4.6.1 (Release 2013b)
March 2014	Online only	Revised for Version 4.7 (Release 2014a)
October 2014	Online only	Revised for Version 4.8 (Release 2014b)
March 2015	Online only	Revised for Version 4.8.1 (Release 2015a)
September 2015	Online only	Revised for Version 5.0 (Release 2015b)
March 2016	Online only	Revised for Version 5.1 (Release 2016a)
September 2016	Online only	Revised for Version 5.2 (Release 2016b)
March 2017	Online only	Revised for Version 5.2.1 (Release 2017a)
September 2017	Online only	Revised for Version 5.3 (Release 2017b)
March 2018	Online only	Revised for Version 5.4 (Release 2018a)
September 2018	Online only	Revised for Version 5.5 (Release 2018b)
March 2019	Online only	Revised for Version 5.6 (Release 2019a)
September 2019	Online only	Revised for Version 5.7 (Release 2019b)
March 2020	Online only	Revised for Version 5.8 (Release 2020a)
September 2020	Online only	Revised for Version 5.9 (Release 2020b)

1	<u>Commands</u>
2	<u>MBCModel.Data</u>


Commands

MBC Model Fitting

Create experimental designs and statistical models for model-based calibration

Description

The **MBC Model Fitting** app enables you to create experimental designs, fit statistical models to engine data, and export the models to generate optimal calibrations in MBC Optimization app. You can also export models to MATLAB® and Simulink® to reuse statistical models for control design, hardware-in-the-loop testing, or powertrain simulation.

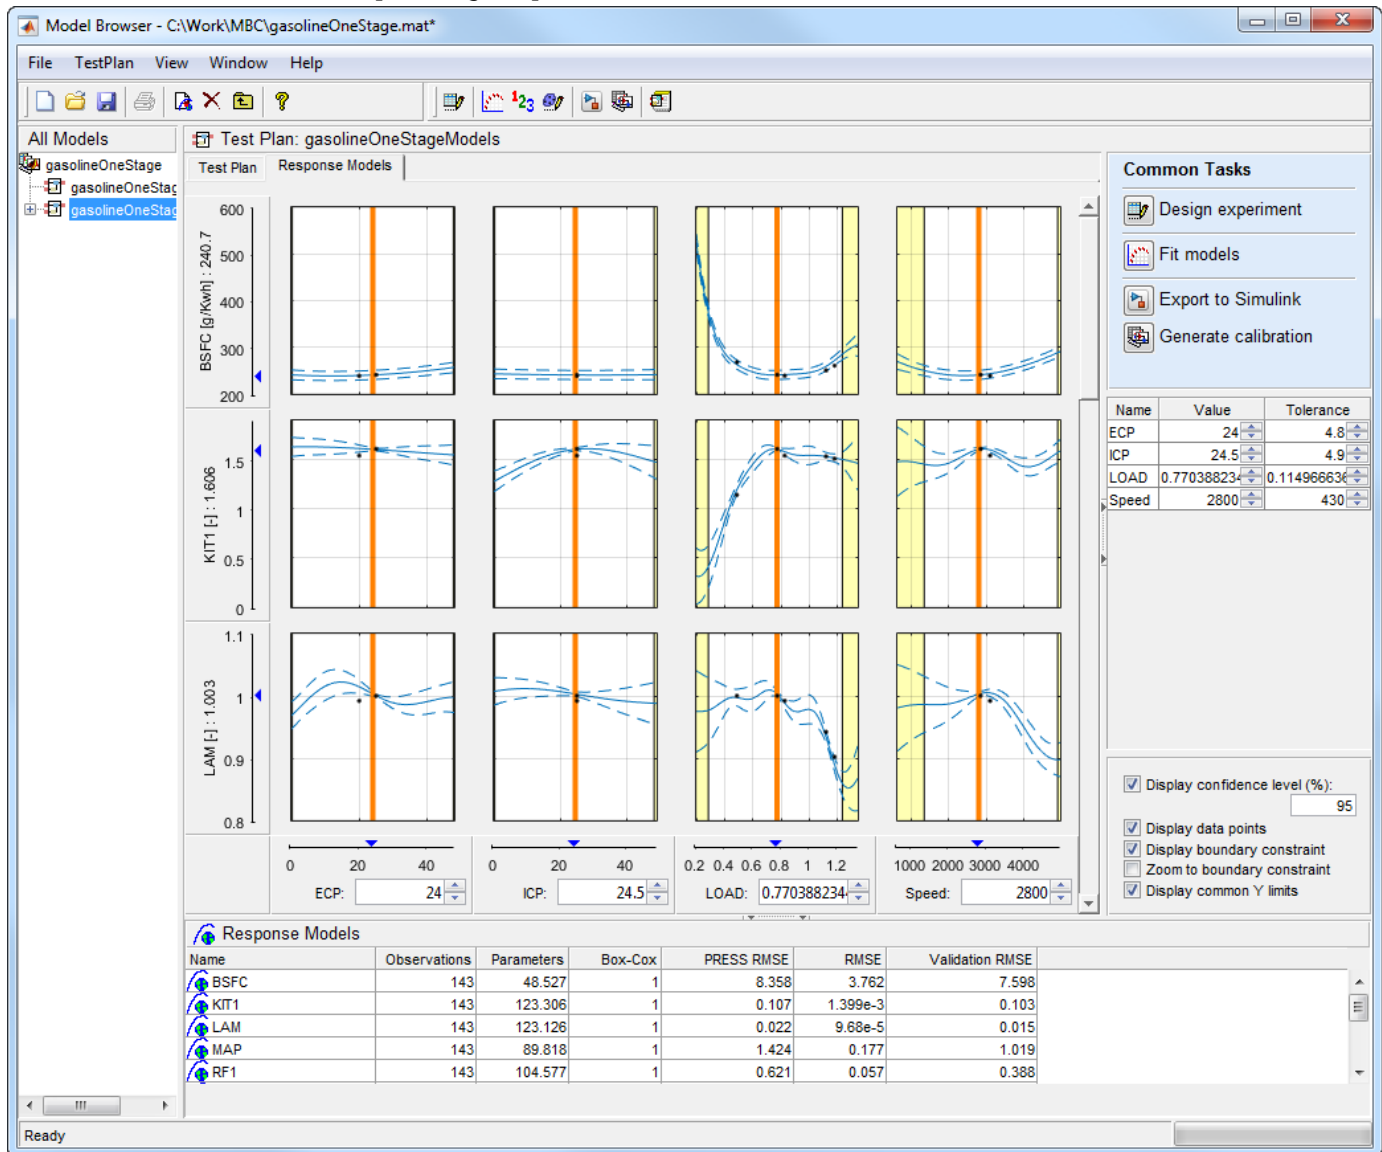

Open the MBC Model Fitting App

- MATLAB Toolstrip: On the **Apps** tab, under **Automotive**, click the app icon.
- MATLAB command prompt: Enter `mbcmodel`.

Examples

- “Model Set Up”
- “Multi-Injection Diesel Calibration”
- “Gasoline Engine Calibration”
- “Model Export to MATLAB, Simulink, and CAGE”

Programmatic Use

`mbcmodel` opens the Model Browser or brings an existing Model Browser to the front of the screen.

`mbcmodel fileName.mat` opens the Model Browser and loads the file specified by *fileName.mat*.

See Also

Apps

MBC Optimization

Topics

“Model Set Up”

“Multi-Injection Diesel Calibration”

“Gasoline Engine Calibration”

“Model Export to MATLAB, Simulink, and CAGE”

Introduced before R2006a

MBC Optimization

Generate optimal lookup tables for model-based calibration

Description

The **MBC Optimization** app lets you use statistical models created in MBC Model Fitting app to generate optimal calibrations for lookup tables that control engine functions. You can generate calibrations and lookup tables for complex, high-degree-of-freedom engines to identify the optimal balance of engine performance, emissions, and fuel economy.

Current run: 19 Current mode: 1 Selected mode: 1 Type: Modal

All Optimization Results

Results Contour

X-axis: SPEED Y-axis: TQ Z-axis: Mode

Current Result - Optimization Solution

Objective Contours

Objective: BSFC

Optimization Results

Vector display format: Expanded vertically

Run	Accept	Mode	MAINSOI	PILOTDE...	PILOTFMF	FUELPRE...	EGF
12	✓	1	-2.236	6.519	0.086	25.762	
13	✓	2	-3.374	8.487	0.08	27.9	
14	✓	2	-4.687	8.536	0.079	8.994	
15	✓	2	-3.882	8.467	0.08	26.771	
16	✓	2	-4.638	8.475	0.08	25.493	
17	✓	2	-5.458	8.475	0.08	27.099	
18	✓	2	-4.26	8.475	0.08	27.275	
19	✓	1	-8.065	8.84	0.065	27.023	
20	✓	1	-7.939	11.872	0.092	10.253	
21	✓	2	-1.221	8.455	0.08	-25.654	
22	✓	2	-6.909	8.475	0.08	28.739	
23	✓	2	-4.71	8.558	0.08	26.981	
24	✓	2	-8.64	8.556	0.08	19.316	
25	✓	2	-7.117	8.53	0.08	18.334	
26	✓	1	-4.813	13.384	0.084	18.206	
27	✓	2	-6.876	8.475	0.08	28.723	
28	✓	2	-6.659	8.475	0.08	-8.74	
29	✓	2	-6.335	8.475	0.08	27.382	
30	✓	2	-8.679	8.475	0.08	19.202	
31	✓	2	-5.871	8.475	0.08	25.993	

Constraint Summary

Name	Description	Constrai
BSFC_Boundary	Boundary constraint of BSFC(MAINSOI, PILOTDELTA S OI, PILOTFMF, F...	-

Free Variable Values

Mode	1
MAINSOI	-8.06519708445
PILOTDELTA S OI	8.84020084614
PILOTFMF	0.0651802590468
FUELPRESSDELTA	27.0233839965
EGRPOS	3.62361566783
VGTPOS	0.686447526008

Open the MBC Optimization App

- MATLAB Toolstrip: On the **Apps** tab, under **Automotive**, click the app icon.
- MATLAB command prompt: Enter `cage`.

Examples

- “Calibration Setup”
- “Optimization”
- “Feature Calibration”
- “Tradeoff Calibration”

Programmatic Use

`cage` opens the CAGE Browser or brings an existing CAGE Browser to the front of the screen. CAGE stands for Calibration Generation.

`cage fileName.cag` opens the CAGE Browser and loads the file specified by *fileName*.

See Also

Apps

MBC Model Fitting

Topics

“Calibration Setup”

“Optimization”

“Feature Calibration”

“Tradeoff Calibration”

Introduced before R2006a

ActiveInputs

Active boundary model inputs

Syntax

```
B.ActiveInputs = [X]
```

Description

ActiveInputs is a property of `mbcboundary.Model`.

`B.ActiveInputs = [X]` sets the active inputs for the boundary model. X is a logical row vector indicating which inputs to use to fit a boundary. You can build boundary models using subsets of input factors and then combine them for the most accurate boundary. This approach can provide more effective results than including all inputs.

Examples

To make a boundary model using only the first two inputs:

```
B.ActiveInputs = [true true false false];
```

Introduced in R2009b

Add

Add boundary model to tree and fit to test plan data

Syntax

```
B = Add(Tree,B)  
B = Add(Tree,B,InBest)
```

Description

This is a method of `mbcboundary.Tree`.

`B = Add(Tree,B)` adds the boundary model to the tree and fits the boundary model to the test plan data. `Tree` is an `mbcboundary.Tree` object, `B` is a new boundary model object. The boundary model must have the same inputs as the boundary tree. The boundary model is always fitted when you add it to the boundary tree. This fitting ensures that the fitting data is compatible with the test plan data. The method returns the fitted boundary model.

`B = Add(Tree,B,InBest)` adds and fits the boundary model, and `InBest` specifies whether to include the boundary model in the best boundary model for the boundary tree. By default, the best model includes the new boundary model.

See Also

[Update](#) | [Remove](#) | [CreateBoundary](#)

Introduced in R2009b

AddConstraint

Add design constraint

Syntax

`D = AddConstraint(D,c)`

Description

`AddConstraint` is a method of `mbcdoe.design`.

`D = AddConstraint(D,c)` adds constraint `c` to the design. You must call `AddConstraint` to apply the constraint and remove points outside the constraint.

If `c` is a boundary model, `AddConstraint` also converts the boundary model object to a `mbcdoe.designconstraint` object.

See Also

`CreateConstraint`

Introduced in R2008a

AddDesign

Add design to test plan

Syntax

```
D = AddDesign(T,D)
D = AddDesign(T,Level,D)
D = AddDesign(T,Level,D,Parent)
```

Description

AddDesign is a method of `mbcmodel.testplan`.

`D = AddDesign(T,D)` adds a design to test plan T.

`D = AddDesign(T,Level,D)` adds a design and specifies the level.

`D = AddDesign(T,Level,D,Parent)` adds a child design.

D is the array of designs to be added to the test plan, T.

Level is the test plan level. By default the level is the outer level (i.e., Level 1 for One-stage, Level 2 (global) for Two-stage).

Parent is the parent design in the design tree. By default designs are added to the top level of the design tree. See [Designs](#) for more information on the design tree.

In order to ensure that the design names are unique in the test plan, the design name will be changed when adding a design to a test plan if a design of the same name already exists. The array of designs with modified names is an output.

Examples

To add three designs to the test plan global (2) level:

```
D = AddDesign(TP, [sfDesign, parkedCamsDesign, mainDesign])
```

See Also

[UpdateDesign](#) | [RemoveDesign](#) | [FindDesign](#)

Introduced in R2008a

AliasMatrix

Alias matrix for linear model parameters

Syntax

```
A = M.AliasMatrix
```

Description

This is a method of `mbcmodel.linearmodel`.

`A = M.AliasMatrix` calculates the alias matrix for the linear model parameters (where `M` is a linear model).

Examples

```
A = AliasMatrix(knot_model)
```

See Also

`ParameterStatistics`

Introduced in R2007a

AlternativeModelStatistics

Summary statistics for alternative models

Syntax

```
S = AlternativeModelStatistics(R)
```

```
S = AlternativeModelStatistics(R, Name)
```

Description

This is a method of all model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`.

This returns an array (S) of summary statistics of all the alternative model fits, to be used to select the best model. These are the summary statistics seen in the list view at the bottom of the Model Browser GUI in any model view.

You must use `CreateAlternativeModels` before you can compare the alternative responses using `AlternativeModelStatistics`. Then use `ChooseAsBest`.

R is the model object whose alternative response models you want to compare. R could be a local (L), response feature (R) or hierarchical response (HR) model.

S is a structure containing `Statistics` and `Names` fields.

- `S.Statistics` is a matrix of size (number alternative responses x number of statistics).
- `S.Names` is a cell array containing the names of all the statistics.

The available statistics vary according to what kind of parent model (two-stage, local, response feature or response) produced the alternative models, and include PRESS RMSE, RMSE, and Two-Stage RMSE.

All the available statistics are calculated unless you specify which you want. You can specify only the statistics you require using the following form:

```
S = AlternativeModelStatistics(R, Name)
```

This returns a double matrix containing only the statistics specified in `Name`.

Note that you use `SummaryStatistics` to examine the fit of the current model, and `AlternativeModelStatistics` to examine the fit of several alternative child models.

Examples

```
S = AlternativeModelStatistics(R);
```

See Also

`CreateAlternativeModels` | `SummaryStatistics` | `ChooseAsBest`

Introduced before R2006a

AlternativeResponses

Array of alternative responses for this response

Syntax

```
altR = R.AlternativeResponses
```

Description

This is a property of the response model object, `mbcmodel.response (R)`.

It returns a list of alternative responses used for one-stage or response feature models.

Examples

```
R = testplan.Responses;  
TQ = R(1);  
AR = TQ.AlternativeResponses;
```

See Also

[LocalResponses](#) | [ResponseFeatures\(Local Response\)](#)

AttachData

Attach data from project to test plan

Syntax

```
newD = AttachData(T, D, Property1, Value, Property2, Value...)
```

Description

This is a method of `mbcmodel.testplan`. Use it to attach the data you want to model to the test plan.

T is the test plan object, D is the data object.

The following table shows the valid properties and their corresponding possible values. The first five are optional property/value pairs to control how the data is matched to a design. These are the settings shown in the last page of the Data Wizard (if there is a design) in the Model Browser. For more information on the meaning of these settings, refer to the Data Wizard section (under Data) in the *Model Browser User's Guide*.

The `usedatarange` property changes the test plan input ranges to the range of the data.

Note If the testplan has responses set up the models are fitted when you attach data.

Property	Value	Default
<code>unmatcheddata</code>	{'all', 'none'}	'all'
<code>moredata</code>	{'all', 'closest'}	'all'
<code>moredesign</code>	{'none', 'closest'}	'none'
<code>tolerances</code>	[1xNumInputs double]	ModelRange/20
<code>usedatarange</code>	logical	false

When you attach data to a test plan the Name property of the test plan inputs is used to select data channels. If the Name is empty then the Symbol is used as the Name. If the Name does not exist in the dataset, an error is generated.

When a test plan has data attached, it is only possible to change the symbols, ranges or nonlinear transforms of the test plan inputs.

Examples

To use all the data in DATA in the test plan TESTPLAN and set the input ranges to the data range:

```
newD = AttachData(TESTPLAN, DATA, 'usedatarange', true);
```

To match data DATA to the best design in testplan TESTPLAN within specified tolerances:

```
tol = [0.075, 100, 1, 2];
unmatch = 'all';
moredata = 'all';
moredes = 'none';
AttachData(testplan, data ,...
    'tolerances', tol,...
    'unmatcheddata', unmatch,...
    'moredata', moredata,...
    'moredesign', moredes);
```

You can use AttachData to use data from one project in another project, as follows:

```
p1 = mbcmodel.LoadProject( filename );
p2 = mbcmodel.LoadProject( filename2 );
p1.Testplan.AttachData( p2.Data );
```

See Also

Data | CreateData | DetachData

Introduced before R2006a

Augment

Add design points

Syntax

```
D = Augment(D, Numpoints)
D = Augment(D, 'Prop1', value1, ...)
```

Description

`Augment` is a method of `mbcdoe.design`. Use it to add points to a design using a specified design generator. After augmenting a design, the design `Style` is set to `Custom` unless an optimal design is used for augmentation, as in the Design Editor.

`D = Augment(D, Numpoints)` augments the design with the number of points specified by `Numpoints` using the current generator settings.

`D = Augment(D, 'Prop1', value1, ...)` augments the design with the generator specified by the generator property value pairs.

You can use the `Augment` method to add points to an existing type using a different design type.

```
OptDesign = Augment(OptDesign, ...
    'Type', 'V-optimal', ...
    'MaxIterations', 200, ...
    'NoImprovement', 50, ...
    'NumberOfPoints', 20);
```

To set all designs points to fixed and then augment an existing design optimally, use the `FixPoints` method to fix all the points as follows:

```
OptDesign = FixPoints(OptDesign);
OptDesign = Augment(OptDesign, ...
    'Type', 'V-optimal', ...
    'MaxIterations', 200, ...
    'NoImprovement', 50, ...
    'NumberOfPoints', 20);
```

When augmenting with an optimal design generator existing points which are not fixed may be changed. To add points optimally and keep only fixed points, use `RemovePoints` before augmenting, e.g.,

```
OptDesign = RemovePoints(OptDesign, 'free');
OptDesign = Augment(OptDesign, ...
    'Type', 'V-optimal', ...
    'MaxIterations', 200, ...
    'NoImprovement', 50, ...
    'NumberOfPoints', 20);
```

To get a candidate set object for use with an optimal design:

```
C = CreateCandidateSet(OptDesign, 'Type', 'Grid', ...
    'NumberOfLevels', [21 21 21]);
```

You see an error if you try to call Augment when the design Style is User-defined or Experimental data.

Examples

To create a candidate set and then optimally augment a design with 10 points:

```
CandidateSet = augmentedDesign.CreateCandidateSet...  
( 'Type', 'Grid' );  
CandidateSet.NumberOfLevels = [21 21 21 21];  
augmentedDesign = Augment( augmentedDesign,...  
    'Type', 'V-optimal',...  
    'NumberOfPoints', 10,...  
    'CandidateSet', CandidateSet,...  
    'MaxIterations', 200,...  
    'NoImprovement', 50 );
```

See Also

Generate | CreateCandidateSet

Introduced in R2008a

BestDesign

Best design in test plan

Syntax

```
T.BestDesign{Level} = d;
```

Description

BestDesign is a property of `mbcdmodel.testplan`.

`T.BestDesign{Level} = d;` sets `d` as the best design, where `Level` is the test plan level. There can be one best design for each level, but the best global (2) level design is used for matching to data when you call `AttachData`.

BestDesign is a cell array with a cell per level. `TP.BestDesign{1}` is the best design for the first level and `TP.BestDesign{2}` is best design for the second level.

Examples

To set the design `globalDesign` as the best design at the global (2) level:

```
T.BestDesign{2} = globalDesign
```

See Also

`CreateDesign`

Introduced in R2008a

BestModel

Combined best boundary models

Syntax

```
mbcboundary.Tree.BestModel
```

Description

This is a property of `mbcboundary.Tree` and `mbcboundary.TwoStageTree`.

`mbcboundary.Tree.BestModel` returns the combined boundary model containing all best boundary models in the tree (read only).

`BestModel` is the boundary model combining the models selected as best. You can select which boundary models to include in the best model with `InBest`. If the best boundary model includes more than one boundary model, that boundary model is an `mbcboundary.Boolean` object.

For `TwoStageTree` objects, the `BestModel` property contains the best boundary model (local, global, and response) (read only). In this case, `BestModel` is the boundary model combining the best local, global and response boundary models. You can select which boundary models to include in the best model with `InBest`. If the best boundary model includes more than one boundary model, that boundary model is an `mbcboundary.Boolean` object.

See Also

`InBest`

Boundary

Get boundary model tree from test plan

Syntax

```
BoundaryTree = mbcmodel.testplan.Boundary
```

Description

Boundary is a property of `mbcmodel.testplan`.

`BoundaryTree = mbcmodel.testplan.Boundary` returns the boundary tree for the test plan. The `BoundaryTree` is a container for all the boundary models you create. `BoundaryTree` is an `mbcboundary.Tree` object.

Examples

To get the boundary tree from the test plan `Boundary` property:

```
BoundaryTree = mbcmodel.testplan.Boundary
```

See Also

`CreateBoundary` | `mbcboundary.Tree` | `mbcboundary.Model`

BoundaryModel

Get boundary model from test plan

Syntax

```
Best = BoundaryModel (T)  
Best = BoundaryModel (T, Type)
```

Description

BoundaryModel is a method of `mbcmodel.testplan`.

`Best = BoundaryModel (T)` returns the best boundary model for T, the test plan. `Best` is a boundary model subclass of `mbcboundary.AbstractBoundary`: `mbcboundary.Model`, `mbcboundary.Boolean`, `mbcboundary.PointByPoint`, or `mbcboundary.TwoStage`.

Note Before Release 2009b, `BoundaryModel` returned an `mbcdoe.designconstraint` object. Use `designconstraint` to convert a boundary to a design constraint.

`Best = BoundaryModel (T, Type)` is the best boundary model for the specified type associated with the test plan. `Type` can be any of the following values:

- 'all': Best boundary model for all inputs (default)
- 'local': Best local boundary model
- 'global': Best global boundary model

Examples

To load boundary constraints from another project file and add to design:

```
otherProject = mbcmodel.LoadProject( [matlabroot, '\toolbox\...  
mbc\mbctraining\Gasoline_project.mat']);  
boundaryConstraints = otherProject.Testplans(1).Boundary.Global.BestModel  
Design.Constraints = boundaryConstraints;
```

When you add the constraints to the design, the boundary model object converts automatically to an `mbcdoe.designconstraint`.

See Also

Boundary | CreateBoundary

Introduced in R2008a

BoxCoxSSE

SSE and confidence interval for Box-Cox transformations

Syntax

```
[sse, ci, lambda] = BoxCoxSSE(Model, lambda)
[sse, ci, lambda] = BoxCoxSSE(Model)
BoxCoxSSE(Model, ...)
```

Description

This is a method of `mbcmodel.linearmodel`.

`[sse, ci, lambda] = BoxCoxSSE(Model, lambda)` computes the sum of squares error (`sse`) and confidence interval (`ci`) for values of the model under different Box-Cox transforms (as given by the parameter `lambda`). The data used is that which was used to fit the model. `sse` is a vector the same size as `lambda` and `ci` is a scalar. There is no statistical difference between the Box-Cox transforms where `sse` less than `ci`.

`[sse, ci, lambda] = BoxCoxSSE(Model)` If `lambda` is not specified, then default values for are used and these are returned in third output argument.

`BoxCoxSSE(Model, ...)` If no output arguments are requested then a plot of SSE versus `lambda` is displayed. The confidence intervals are also displayed on this plot.

Examples

To try several different values, of the Box-Cox parameter and plot the results:

```
lambda = -3:0.5:3;
[sse, ci] = BoxCoxSSE( M, lambda);
semilogy( lambda, sse, 'bo-', lambda([1,end]), [ci, ci], 'r--' );
xlabel( 'Box-Cox parameter, \lambda' );
ylabel( 'SSE' );
```

Note that `BoxCoxSSE` does not set a Box-Cox transform in the model. To do this use:

```
M.Properties.BoxCox = 0;
[S,M] = M.Fit;
```

See Also

`ParameterStatistics`

Introduced in R2007a

Centers

Centers of RBF model

Syntax

```
centers = params.Centers
```

Description

This is a property of `mbcmodel.rbfmodelparameters`, for Radial Basis Function (RBF) models only. This returns an array of size `number_of_centers` by `number_of_variables`.

Examples

```
centers = params.Centers;
```

See Also

Widths

cgoptioptions

Create custom optimization options object

Syntax

Description

Use the `cgoptioptions` object to define custom optimization settings for use in CAGE.

For a list of `cgoptioptions` methods, see “Optimization Function Reference” in the CAGE documentation.

For instructions, see “User-Defined Optimizations” in the CAGE documentation.

Introduced in R2010b

cgoptimstore

Construct optimization interface

Syntax

Description

When running a user-defined optimization, you use the `cgoptimstore` object in the `Evaluation` section of your script. Use the `cgoptimstore` object to define the interface to CAGE for your custom optimization routine. CAGE interacts with your routine (obtaining inputs and sending outputs) via the `cgoptimstore` object. The `cgoptimstore` object provides methods for accessing information about and evaluating the objectives and constraints that have been defined in the CAGE GUI. The `cgoptimstore` object also provides the interface for sending the optimization results back to CAGE when an optimization is completed.

For a list of `cgoptimstore` methods, see “Optimization Function Reference” in the CAGE documentation.

For instructions, see “User-Defined Optimizations” in the CAGE documentation.

Introduced in R2010b

ChooseAsBest

Choose best model from alternative responses

Syntax

```
ChooseAsBest(R, Index)
```

Description

This is a method of the response model object, `mbcmodel.response`. This is the same function as selecting the best model in the Model Selection window of the Model Browser GUI. For a local model `MakeHierarchicalResponse` performs a similar function.

R is the object containing the response model.

Index is the number of the response model you want to choose as best. Use `AlternativeResponses` to find the index for each response model, and use `AlternativeModelStatistics` to choose the best fit.

Examples

```
ChooseAsBest(R, AlternativeModel)
RMSE = AlternativeModelStatistics(R, 'RMSE');
[mr, Best] = min(RMSE);
ChooseAsBest(R, Best);
```

See Also

`AlternativeResponses` | `AlternativeModelStatistics` | `DiagnosticStatistics` | `MakeHierarchicalResponse`

Introduced before R2006a

ConstrainedGenerate

Generate constrained space-filling design of specified size

Syntax

```
design = ConstrainedGenerate( design, NumPoints, 'UnconstrainedSize', Size,
'MaxIter', NumIterations )
design = ConstrainedGenerate( design, NumPoints, OPTIONS )
```

Description

`ConstrainedGenerate` is a method of `mbcdoe.design`. Use it to generate a space-filling design of specified size within the constrained region. This method only works for space-filling designs. It may not be possible to achieve a specified number of points, depending on the generator settings and constraints.

`design = ConstrainedGenerate(design, NumPoints, 'UnconstrainedSize', Size, 'MaxIter', NumIterations)` tries to generate a design with the number of constrained points specified by `NumPoints`. You can supply parameter value pairs for the options or you can use a structure: `design = ConstrainedGenerate(design, NumPoints, OPTIONS)`.

- `MaxIter` — Maximum iterations. Default: 10
- `UnconstrainedSize` — Total number of points in unconstrained design. Default: `NumPoints`

The algorithm `ConstrainedGenerate` produces a sequence of calls to `Generate`, and updates the `UnconstrainedSize` using the following formula:

```
UnconstrainedSize = ceil(UnconstrainedSize * NumPoints/D.NumberOfPoints);
```

Examples

With `ConstrainedGenerate`, make a 200 point design, using an existing space-filling design `sfDesign`, and inspect the constrained and total number of points:

```
sfDesign = ConstrainedGenerate( sfDesign, 200, 'UnconstrainedSize', 800, 'MaxIter',10 );

% How did we do?
finalNumberOfPoints = sfDesign.NumberOfPoints
% How many points did we need in total?
totalNumberOfPoints = sfDesign.Generator.NumberOfPoints

finalNumberOfPoints =
    200
totalNumberOfPoints =
    839
```

See Also

[CreateConstraint](#) | [Generate](#)

Introduced in R2008a

Constraints

Constraints in design

Syntax

```
Constraints = D.Constraints
```

Description

Constraints is a property of `mbcdoe.design`.

`Constraints = D.Constraints` Designs have a `Constraints` property, initially this is empty:

```
constraints = design.Constraints
```

```
constraints =  
0x0 array of mbcdoe.designconstraint
```

Use `CreateConstraint` to form constraints.

See Also

Topics

`CreateConstraint`

`AddConstraint`

CopyData

Create data object from copy of existing object

Syntax

```
newD = CopyData(P, D)
```

```
newD = CopyData(P, Index)
```

Description

This is a method of `mbcmodel.project`.

Use this to duplicate data, for example if you want to make changes for further modeling but want to retain the existing dataset. You can refer to the data object either by name or index.

P is the project object.

D is the data object you want to copy.

Index is the index of the data object you want to copy.

Examples

```
D2 = CopyData(P1, D1);
```

See Also

Data | CreateData | RemoveData

Introduced before R2006a

Correlation

Correlation matrix for linear model parameters

Syntax

```
STATS = Correlation(LINEARMODEL)
```

Description

This is a method of `mbcmodel.linearmodel`.

`STATS = Correlation(LINEARMODEL)` calculates the correlation matrix for the linear model parameters.

Examples

```
Stats = Correlation(knot_model)
```

See Also

`ParameterStatistics`

Introduced in R2007a

Covariance

Covariance matrix for linear model parameters

Syntax

```
STATS = Covariance(LINEARMODEL)
```

Description

This is a method of `mbcmodel.linearmodel`.

`STATS = Covariance(LINEARMODEL)` calculates the covariance matrix for the linear model parameters.

Examples

```
Stats = Covariance(knot_model)
```

See Also

`ParameterStatistics`

Introduced in R2007a

CreateAlgorithm

Create algorithm

Syntax

```
newalg = alg.CreateAlgorithm( AlgorithmName)
```

Description

This is a method of `mbcmodel.fitalgorithm`.

`newalg = alg.CreateAlgorithm(AlgorithmName)` creates an algorithm of the specified type. `alg` is a `mbcmodel.fitalgorithm` object. `AlgorithmName` must be in the list of alternative algorithms given by `alg.getAlternativeNames`.

To change the fit algorithm for a model:

```
>> model = mbcmodel.CreateModel('Polynomial', 2);
>> minpress = model.FitAlgorithm.CreateAlgorithm('Minimize PRESS');
>> model.FitAlgorithm = minpress;
```

The `AlgorithmName` determines what properties you can set. You can display the properties for an algorithm as follows:

```
>> model.FitAlgorithm.properties

Algorithm: Minimize PRESS
Alternatives: 'Least Squares', 'Forward Selection', 'Backward
Selection', 'Prune'
           MaxIter: Maximum Iterations (int: [1,1000])
```

As a simpler alternative to using `CreateAlgorithm`, you can assign the algorithm name directly to the algorithm. For example:

```
B.FitAlgorithm.BoundaryPointOptions = 'Boundary Only';
```

Or:

```
m.FitAlgorithm = 'Minimize PRESS';
```

Case and spaces are ignored. See `FitAlgorithm`.

The following sections list the properties available for each algorithm type.

Linear Model Algorithm Properties

Linear Models Algorithms

Used by polynomials, hybrid splines and as the `StepAlgorithm` for RBF algorithms.

Algorithm: Least Squares

Alternatives: 'Minimize PRESS', 'Forward Selection', 'Backward Selection', 'Prune'

Algorithm: Minimize PRESS

Alternatives: 'Least Squares', 'Forward Selection', 'Backward Selection', 'Prune'

- MaxIter: Maximum Iterations (int: [1,1000])

Algorithm: Forward Selection

Alternatives: 'Least Squares', 'Minimize PRESS', 'Backward Selection', 'Prune'

- ConfidenceLevel: Confidence level (%) (numeric: [70,100])
- MaxIter: Maximum Iterations (int: [1,1000])
- RemoveAll: Remove all terms first (Boolean)

Algorithm: Backward Selection

Alternatives: 'Least Squares', 'Minimize PRESS', 'Forward Selection', 'Prune'

- ConfidenceLevel: Alpha (%) (numeric: [70,100])
- MaxIter: Maximum Iterations (int: [1,1000])
- IncludeAll: Include all terms first (Boolean)

Algorithm: Prune

Alternatives: 'Least Squares', 'Minimize PRESS', 'Forward Selection', 'Backward Selection'

- Criteria (PRESS|RMSE|RMSE|GCV|Weighted PRESS|-2logL|AIC|AICc|BIC|R²|R² adj|PRESS R²|DW|Cp|cond(J))
- MinTerms: Minimum number of terms (int: [0,Inf])
- Tolerance (numeric: [0,1000])
- IncludeAll: Include all terms before prune (Boolean)
- Display (Boolean)

RBF Algorithm Properties

For information about any of the RBF and Hybrid RBF algorithm properties, see “Radial Basis Functions for Model Building”, and especially “Fitting Routines” in the Model Browser User's Guide.

Algorithm: RBF Fit

- WidthAlgorithm: Width selection algorithm (mbcmodel.fitalgorithm)
- StepAlgorithm: Stepwise (mbcmodel.fitalgorithm)

Width Selection Algorithms

Alternatives: 'WidPerDim', 'Tree Regression'

Algorithm: TrialWidths

- NestedFitAlgorithm: Lambda selection algorithm (mbcmodel.fitalgorithm)
- Trials: Number of trial widths in each zoom (int: [2,100])

- Zooms: Number of zooms (int: [1,100])
- MinWidth: Initial lower bound on width (numeric: [2.22045e-016,1000])
- MaxWidth: Initial upper bound on width (numeric: [2.22045e-016,100])
- PlotFlag: Display plots (Boolean)
- PlotProgress: Display fit progress (Boolean)

Algorithm: WidPerDim

Alternatives: 'TrialWidths', 'Tree Regression'

- NestedFitAlgorithm: Lambda selection algorithm (mbcmodel.fitalgorithm)
- DisplayFlag: Display (Boolean)
- MaxFunEvals: Maximum number of test widths (int: [1,1e+006])
- PlotProgress: Display fit progress (Boolean)

Algorithm: Tree Regression

Alternatives: 'TrialWidths', 'WidPerDim'

- MaxNumRectangles: Maximum number of panels (int: [1,Inf])
- MinPerRectangle: Minimum data points per panel (int: [2,Inf])
- RectangleSize: Shrink panel to data (Boolean)
- AlphaSelectAlg: Alpha selection algorithm (mbcmodel.fitalgorithm)

Lambda Selection Algorithms**Algorithm: IterateRidge**

Alternatives: 'IterateRols', 'StepItRols'

- CenterSelectionAlg: Center selection algorithm (mbcmodel.fitalgorithm)
- MaxNumIter: Maximum number of updates (int: [1,100])
- Tolerance: Minimum change in $\log_{10}(\text{GCV})$ (numeric: [2.22045e-016,1])
- NumberOfLambdaValues: Number of initial test values for lambda (int: [0,100])
- CheapMode: Do not reselect centers for new width (Boolean)
- PlotFlag: Display (Boolean)

Algorithm: IterateRols

Alternatives: 'IterateRidge', 'StepItRols'

- CenterSelectionAlg: Center selection algorithm (mbcmodel.fitalgorithm)
- MaxNumIter: Maximum number of iterations (int: [1,100])
- Tolerance: Minimum change in $\log_{10}(\text{GCV})$ (numeric: [2.22045e-016,1])
- NumberOfLambdaValues: Number of initial test values for lambda (int: [0,100])
- CheapMode: Do not reselect centers for new width (Boolean)
- PlotFlag: Display (Boolean)

Algorithm: StepItRols

Alternatives: 'IterateRidge', 'IterateRols'

- MaxCenters: Maximum number of centers (evalstr)
- PercentCandidates: Percentage of data to be candidate centers (evalstr)
- StartLambdaUpdate: Number of centers to add before updating (int: [1,Inf])
- Tolerance: Minimum change in $\log_{10}(\text{GCV})$ (numeric: [2.22045e-016,1])
- MaxRep: Maximum number of times $\log_{10}(\text{GCV})$ change is minimal (int: [1,100])

Center Selection Algorithms

Algorithm: Rols

Alternatives: 'RedErr', 'WiggleCenters', 'CenterExchange'

- MaxCenters: Maximum number of centers (evalstr)
- PercentCandidates: Percentage of data to be candidate centers (evalstr)
- Tolerance: Regularized error tolerance (numeric: [2.22045e-016,1])

Algorithm: RedErr

Alternatives: 'Rols', 'WiggleCenters', 'CenterExchange'

- MaxCenters: Number of centers (evalstr)

Algorithm: WiggleCenters

Alternatives: 'Rols', 'RedErr', 'CenterExchange'

- MaxCenters: Number of centers (evalstr)
- PercentCandidates: Percentage of data to be candidate centers (evalstr)

Algorithm: CenterExchange

Alternatives: 'Rols', 'RedErr', 'WiggleCenters'

- MaxCenters: Number of centers (evalstr)
- NumLoops: Number of augment/reduce cycles (int: [1,Inf])
- NumAugment: Number of centers to augment by (int: [1,Inf])

Tree Regression Algorithms

Algorithm: Trial Alpha

Alternatives: 'Specify Alpha'

- AlphaLowerBound: Initial lower bound on alpha (numeric: [2.22045e-016,Inf])
- AlphaUpperBound: Initial upper bound on alpha (numeric: [2.22045e-016,Inf])
- Zooms: Number of zooms (int: [1,Inf])
- Trials: Trial alphas per zoom (int: [2,Inf])
- Spacing: Spacing (LinearLogarithmic)
- CenterSelectAlg: Center selection algorithm (mbcmodel.fitalgorithm)

Algorithm: Specify Alpha

Alternatives: 'Trial Alpha'

- Alpha: Width scale parameter, alpha (numeric: [2.22045e-016,Inf])
- NestedFitAlgorithm: Center selection algorithm (mbcmodel.fitalgorithm)

Algorithm: Tree-based Center Selection

Alternatives: 'Generic Center Selection'

- ModelSelectionCriteria: Model selection criteria (BIC|GCV)
- MaxNumberCenters: Maximum number of centers (evalstr)

Algorithm: Generic Center Selection

Alternatives: 'Tree-based Center Selection'

- CenterSelectAlg: Center selection algorithm (mbcmodel.fitalgorithm)

Hybrid RBF Algorithms**Algorithm: RBF Fit**

- WidthAlgorithm: Width selection algorithm (mbcmodel.fitalgorithm)
- StepAlgorithm: Stepwise (mbcmodel.fitalgorithm)

Width Selection Algorithms**Algorithm: TrialWidths**

- NestedFitAlgorithm: Lambda and term selection algorithm (mbcmodel.fitalgorithm)
- Trials: Number of trial widths in each zoom (int: [2,100])
- Zooms: Number of zooms (int: [1,100])
- MinWidth: Initial lower bound on width (numeric: [2.22045e-016,1000])
- MaxWidth: Initial upper bound on width (numeric: [2.22045e-016,100])
- PlotFlag: Display plots (Boolean)
- PlotProgress: Display fit progress (Boolean)

Nested Fit Algorithms**Algorithm: Twostep**

Alternatives: 'Interlace'

- MaxCenters: Maximum number of centers (evalstr)
- PercentCandidates: Percentage of data to be candidate centers (evalstr)
- StartLambdaUpdate: Number of terms to add before updating (int: [1,Inf])
- Tolerance: Minimum change in log₁₀(GCV) (numeric: [2.22045e-016,1])
- MaxRep: Maximum number of times log₁₀(GCV) change is minimal (int: [1,100])
- PlotFlag: Display (Boolean)

Algorithm: Interlace

Alternatives: 'Twostep'

- MaxParameters: Maximum number of terms (evalstr)
- MaxCenters: Maximum number of centers (evalstr)
- PercentCandidates: Percentage of data to be candidate centers (evalstr)
- StartLambdaUpdate: Number of terms to add before updating (int: [1,Inf])
- Tolerance: Minimum change in $\log_{10}(\text{GCV})$ (numeric: [2.22045e-016,1])
- MaxRep: Maximum number of times $\log_{10}(\text{GCV})$ change is minimal (int: [1,100])

Boundary Model Fit Algorithm Parameters

The following sections list the available fit algorithm parameters for command-line boundary models. The boundary model fit algorithm parameters have the same fit options as the Boundary Editor GUI. For instructions on using these fit options, see “Editing Boundary Model Fit Options” in the Model Browser documentation.

Convex Hull

KeepAllFacets: Boolean to indicate whether to keep all facets (default is `false`, do not keep all facets).

Tolerance: Tolerance for maximum 1-norm distance allowed for removing facets (numeric: [0,Inf], default 0.02). To remove more facets, increase the tolerance.

For more information, see “Convex Hull Setting” in the Model Browser documentation.

Ellipsoid

Algorithm: Constraint Fitting

BoundaryPointOptions: Boundary Points (mbcmodel.fitalgorithm)

The boundary points algorithm uses optimization to find the best ellipse. These options are from `fmincon`.

Algorithm: Boundary Points

- Display: Display (none|iter|final)
- MaxFunEvals: Maximum function evaluations (int: [1,Inf])
- MaxIter: Maximum iterations (int: [1,Inf])
- TolFun: Function tolerance (numeric: [1e-012,Inf])
- TolX: Variable tolerance (numeric: [1e-012,Inf])
- TolCon: Constraint tolerance (numeric: [1e-012,Inf])

Star-shaped

Algorithm: Constraint Fitting

SpecialPointOptions: Special Points (mbcmodel.fitalgorithm)

BoundaryPointOptions: Boundary Points (mbcmodel.fitalgorithm)

ConstraintFitOptions: Constraint Fit (mbcmodel.fitalgorithm)

Star-shaped—Special Points

Algorithm: Star-shaped Points

CenterAlg: Center (mbcmodel.fitalgorithm)

Algorithm alternatives: 'Mean', 'Median', 'Mid Range', 'Min Ellipse', 'User Defined'

For User Defined only: CenterPoint: User-defined center [X1,X2] (vector: NumberOfActiveInputs)

Star-shaped—Boundary Points

You can choose to find boundary points (use `Interior`) or to assume that all points are on the boundary (use `Boundary Only`). The interior algorithm then has manual and auto options for the dilation radius and ray casting algorithms.

- Algorithm: Boundary Only (no further options)
- Algorithm: Interior. Further options:
 - DilationRadius (mbcmodel.fitalgorithm)
 - Algorithm: Auto
 - Algorithm: Manual
 - radius: Radius (numeric: [0,Inf])
 - RayCasting (mbcmodel.fitalgorithm)
 - Algorithm: From data
 - Algorithm: Manual
 - nrays: Number of Rays (int: [1,Inf])

Star-shaped—Constraint Fit

Algorithm: Star-shaped RBF Fit

Further options:

- Transform (None|Log|McCallum)
- KernelOpts: RBF Kernel (mbcmodel.fitalgorithm)

Kernel algorithms can be: wendland, multiquadric, recmultiquadric, gaussian, thinplate, logisticrbf, linearrbf, cubicrbf.

You can specify widths and continuity as sub-properties of particular RBF kernels.

- You can set widths for wendland, multiquadric, recmultiquadric, gaussian, logisticrbf. Width: RBF Width (numeric: [1.49012e-008,Inf])

You can set Continuity for wendland. Cont: RBF Continuity (0|2|4|6)

RbfOpts: RBF Algorithm (mbcmodel.fitalgorithm)

Algorithm: Interpolation. The following are additional settings for interpolating RBF.

- CoincidentStrategy: Coincident Node Strategy (Maximum|Minimum|Mean)
- Algorithm: Algorithm (Direct|GMRES|BICG|CGS|QMR)
- Tolerance: Tolerance (numeric: [0,Inf])
- MaxIt: Maximum number of iterations (int: [1,Inf])

Examples

First get a fitalgorithm object, F, from a model:

```
M = mbcmodel.CreateModel('Polynomial', 4);
F = M.FitAlgorithm

F =
Algorithm: Least Squares
Alternatives: 'Minimize PRESS','Forward Selection','Backward
Selection','Prune'
1x1 struct array with no fields.
```

Then, to create a new algorithm type:

```
Alg = CreateAlgorithm(F, 'Minimize PRESS')

Alg =
Algorithm: Minimize PRESS
Alternatives: 'Least Squares','Forward Selection','Backward
Selection','Prune'
    MaxIter: 50
```

The `AlgorithmName` determines what properties you can set. You can display the properties for an algorithm as follows:

```
>> model.FitAlgorithm.properties

Algorithm: Minimize PRESS
Alternatives: 'Least Squares','Forward Selection','Backward
Selection','Prune'
    MaxIter: Maximum Iterations (int: [1,1000])
```

As a simpler alternative to using `CreateAlgorithm`, you can assign the algorithm name directly to the algorithm. For example:

```
B.FitAlgorithm.BoundaryPointOptions = 'Boundary Only';
```

Or:

```
m.FitAlgorithm = 'Minimize PRESS';
```

Case and spaces are ignored.

See Also

[getAlternativeNames](#) | [SetupDialog](#) | [FitAlgorithm](#)

Introduced in R2007a

CreateAlternativeModels

Create alternative models from model template

Syntax

```
R = CreateAlternativeModels(R, modeltemplate, criteria)
```

```
R = CreateAlternativeModels(R, modellist, criteria)
```

```
R = CreateAlternativeModels(R, LocalModels,LocalCriteria,GlobalModels,GlobalCriteria)
```

Description

This is a method of all model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`.

This is the same as the Build Models function in the Model Browser GUI. A selection of child node models are built. The results depend on where you call this method from. Note that the hierarchical model is automatically constructed when `CreateAlternativeModels` is called for a local model.

- This option makes alternative response feature models for each response feature.

```
R = CreateAlternativeModels(R, models, criteria)
```

- `Models` is the list of models. You can use a model template file (`.mbm`) created in the Model Browser, or a cell array of `mbcmodel.model` objects.
- `Criteria` is the selection criteria for best model (from the statistics available from `AlternativeModelStatistics`).
- This option makes alternative local models as well as alternative response feature models.

```
R = CreateAlternativeModels(R,  
LocalModels,LocalCriteria,GlobalModels,GlobalCriteria)
```

- `LocalModels` is the list of local models - you must pass in an empty matrix).
- `LocalCriteria` is 'Two-Stage RMSE'.
- `GlobalModels` is the list of global models (from the model template).
- `GlobalCriteria` is the selection criteria for best model.

You construct a model template file (such as `'mymodels.mbm'`) in the Model Browser. From any response (global or one-stage model) with alternative responses (child nodes), select **Model > Make Template**. You can save the child node model types of your currently selected modeling node as a model template. Alternatively from any response click **Build Models** in the toolbar and create a series of alternative response models in the dialog.

Examples

```
mymodels = 'mymodels.mbm';  
mlist = {};
```

```
load('-mat', mymodels);  
criteria = 'PRESS RMSE';  
CreateAlternativeModels(R, [], 'Two-Stage RMSE', mlist,  
criteria);
```

Note that the model template contains the variable `mlist`.

```
CreateAlternativeModels( RESPONSE, 'alternative_models.mbm', 'Weighted PRESS' )
```

creates alternative response feature models based upon the model template file `alternative_models.mbt`, and chooses the best model based upon each model's Weighted PRESS statistic.

See Also

`AlternativeModelStatistics`

Introduced before R2006a

CreateBoundary

Create boundary model

Syntax

```
B = mbcboundary.CreateBoundary(Type, Inputs)
B = mbcboundary.CreateBoundary(Type, Inputs, Property, Value, ...)
B = CreateBoundary(Tree)
B = CreateBoundary(Tree, Type)
B = CreateBoundary(Tree, Type, Property, Value, ...)
newboundary = CreateBoundary(B, Type)
newboundary = CreateBoundary(B, Type, Property, Value, ...)
```

Description

`B = mbcboundary.CreateBoundary(Type, Inputs)` This syntax is a static package function that creates an `mbcboundary.Model` object (B) of the specified `Type`, where `Inputs` is an `mbcmodel.modelinput` object. Use this function to create a new boundary model object independent of any project. See `fit` for an alternative.

`B = mbcboundary.CreateBoundary(Type, Inputs, Property, Value, ...)` creates a boundary with the specified properties. Properties depend on the boundary model type.

You can use `getAlternativeTypes` to get a list of valid model types, or see `Type` (for boundary models). Spaces and case in `Type` are ignored.

`CreateBoundary` is also a method of `mbcboundary.Tree`. Use the method to create a new boundary model within a project.

`B = CreateBoundary(Tree)` creates a new boundary model, B, from the `mbcboundary.Tree` object, `Tree`. The method uses the test plan inputs to define the boundary model inputs. You must call `Addto` to add the new model to the tree.

`B = CreateBoundary(Tree, Type)` creates a new boundary model, B of the specified `Type`.

`B = CreateBoundary(Tree, Type, Property, Value, ...)` creates a boundary with the specified properties.

`CreateBoundary` is also a method of `mbcboundary.AbstractBoundary` and all its subclasses. Use the method to create a new boundary model from an existing boundary model.

`newboundary = CreateBoundary(B, Type)` creates a new boundary model, `newboundary`, with the same inputs as the current boundary model B. You can get a list of valid types with `getAlternativeTypes`.

`newboundary = CreateBoundary(B, Type, Property, Value, ...)` creates a new boundary model with specified properties.

Examples

You can create a boundary model outside of a project in either of the following ways:

```
B = mbcboundary.Fit(Data,Type);
B = mbcboundary.CreateBoundary(Type,Inputs)
```

To create a new boundary model within a project:

```
Tree = testplan.Boundary
B = CreateBoundary(Tree)
```

This creates a new boundary model, B, from the mbcboundary.Tree object, Tree. The method uses the test plan inputs to define the boundary model inputs.

To create a star-shaped global boundary model for a testplan:

```
B = CreateBoundary(testplan.Boundary.Global, 'Star-shaped');
```

Call Add to add the boundary model to the tree. .

To add the boundary model to the test plan, and fit the boundary model:

```
B = Add(testplan.Boundary.Global,B);
```

The best boundary model for the tree includes this boundary model.

To create boundary models for a point-by-point test plan:

```
B = TP.Boundary.Local.CreateBoundary('Point-by-point');
% Use convex hull type for the local boundaries
B.LocalModel = CreateBoundary(B.LocalModel,'Convex hull');
% Add point-by-point boundary model to project.
TP.Boundary.Local.Add(B);
```

See Also

Type (for boundary models) | fit | getAlternativeTypes | mbcboundary.Model | mbcboundary.Tree

Introduced in R2009b

CreateCandidateSet

Create candidate set for optimal designs

Syntax

```
D = CreateCandidateSet(D)
D = CreateCandidateSet(D,prop1,value1,...)
```

Description

CreateCandidateSet is a method of `mbcdoe.design`. Candidate sets are very similar to design generators. They are not used directly in specifying a design but are used to specify the set of all possible points to be considered as part of an optimal design. You obtain the candidate set from an optimal design generator or by using `mbcdoe.design.CreateCandidateSet`.

`D = CreateCandidateSet(D)` creates a candidate set (`mbcdoe.candidateset` object) for the design.

`D = CreateCandidateSet(D,prop1,value1,...)` creates a candidate set with the specified properties for the design. To see the properties you can set, see the table of candidate set properties, [Candidate Set Properties \(for Optimal Designs\)](#).

Examples

```
CandidateSet = augmentedDesign.CreateCandidateSet( 'Type',...
'Grid' );
CandidateSet.NumberOfLevels = [21 21 21 21];
```

See Also

[Properties \(for candidate sets\) | Augment](#)

Introduced in R2008a

CreateConstraint

Create design constraint

Syntax

```
c = CreateConstraint(D)
c = CreateConstraint(D,prop1,va11,...)
```

Description

CreateConstraint is a method of `mbcdoe.design`.

Designs have a Constraints property, initially this is empty:

```
constraints = design.Constraints

constraints =
0x0 array of mbcdoe.designconstraint
```

Use CreateConstraint to form constraints.

`c = CreateConstraint(D)` creates a default constraint for the design.

`c = CreateConstraint(D,prop1,va11,...)` creates a constraint with the specified properties. See Constraint Properties.

By default a 1D table constraint is created for designs with two or more inputs.

For a design with one input a linear constraint is created by default.

You can specify the constraint type during creation by using the `Type` property, e.g.,

```
c = CreateConstraint(D,'Type','Linear')
```

Other available properties depend on the design type. See the table Constraint Properties.

This method does not add the constraint to the design. You must explicitly add the constraint to the design using the Constraints property of the design e.g.,

```
D = AddConstraint(D,c)
```

or

```
D.Constraints(end+1) = c;
```

You must call `AddConstraint` to apply the constraint and remove design points outside the constraint.

Examples

To create a Linear constraint, add it to a design, and regenerate the design points:

```
cLinear = CreateConstraint(design,'Type','Linear');
cLinear.A = [-2.5e-4, 1];
cLinear.b = 0.25;
cLinear
design.Constraints = cLinear;
design = Generate(design);
```

To create and apply a 1D Table constraint:

```
cTable1d = CreateConstraint(design,'Type','1D Table');
cTable1d.Table = [0.9 0.5];
cTable1d.Breakpoints = [500 6000];
cTable1d
design.Constraints = cTable1d;
design = Generate(design);
```

To combine constraints, use an array of the constraints you want to apply:

```
design.Constraints = [cLinear, cTable1d];
constraints = design.Constraints
design = Generate(design);
```

```
constraints =
1x2 array of mbcdoe.designconstraint
Linear design constraint: -0.00025*N + 1*L <= 0.25
1D Table design constraint: L(N) <= Lmax
```

To load boundary constraints from another project file and add to design:

```
otherProject = mbcmodel.LoadProject( [matlabroot,'\toolbox\',...
'mbc\mbctraining\Gasoline_project.mat']);
mytestplan = otherProject.Testplans(1);
boundaryConstraints = BoundaryModel(mytestplan,'global');
Design.Constraints = boundaryConstraints;
```

See Also

Properties (for design constraints) | AddConstraint

Introduced in R2008a

CreateData

Create data object

Syntax

```
D = CreateData(P)
D = CreateData(P,filename)
D = CreateData(P,table)
D = CreateData(P,mbcdatastructure)
D = CreateData(P,filename,filetype)
```

Description

The first syntax is a method of `mbcmodel.project`. Use this to create a new data object in an existing project. `P` is the project object.

`filename` is a character vector specifying the full path to the file.

`table` is the table object.

`mbcdatastructure` is the MBC data structure.

`filetype` is a character vector specifying the file type. See `DataFileTypes` for the specification of allowed file types (and `mbccheckindataloadingfcn` to specify your own data loading function). If `filetype` is not provided, then MBC will attempt to infer the file type from the file extension, i.e. if the file extension is `.xls` then MBC will try the Excel File Loader.

If `filename` is not provided then no data will be loaded into the new data object. Data can be loaded subsequently using `ImportFromFile`, provided that editing of the data object has been enabled via a call to `BeginEdit`. Call `CommitEdit` to apply edits.

If you create the data object specifying a `filename`, then the `Name` property is set to the filename. However, if you use `ImportFromFile` after creation to load data from a file, the name of the data object does not change.

The second syntax is a function. Use this to create a new data object independent of any project. You can use `AttachData` to use the data object in another test plan, e.g.,

```
d = mbcmodel.CreateData(filename);
testplan.AttachData(d);
```

Examples

```
data = CreateData(P, 'D:\MBCWork\data1.xls');
D = mbcmodel.CreateData;
D = mbcmodel.CreateData('D:\MBCWork\data.xls');
```

Where `P` is an `mbcmodel.project` object.

See Also

DataFileTypes | BeginEdit | CopyData | RemoveData | Data | ImportFromFile | CommitEdit | AttachData

Introduced before R2006a

CreateDesign

Create design object for test plan or model

Syntax

```
D = CreateDesign(Testplan)
D = CreateDesign(Testplan,Level)
D = CreateDesign(Testplan,Level,prop1,value1,...)
D = CreateDesign(Model)
D = CreateDesign(Model,prop1,value1,...)
D = CreateDesign(Inputs)
D = CreateDesign(Inputs,prop1,value1,...)
D = CreateDesign(Design)
```

Description

CreateDesign is a method of `mbcmodel.testplan`, `mbcmodel.model`, and `mbcmodel.modelinput`. Property value pairs can be specified at creation time. The property value pairs are properties of `mbcdoe.design`.

Properties of `mbcdoe.design`

mbcdoe.design Property	Description
Constraints on page 1-28	Constraints in design.
Generator on page 1-78	Design generation options.
Inputs on page 1-91	Inputs for design.
Model on page 1-128	Model for design.
Points on page 1-155	Matrix of design points.
PointTypes on page 1-156	Fixed and free point status.
Style on page 1-204	Style of design type.
NumInputs on page 1-140	Read-only — Number of model inputs.
NumberOfPoints on page 1-142	Read-only — Number of design points.
Type on page 1-212	Design type. The design property Type can <i>only</i> be specified with CreateDesign and is subsequently read-only for design objects.

`D = CreateDesign(Testplan)` creates a design for the test plan, where `Testplan` is an `mbcmodel.testplan` object.

`D = CreateDesign(Testplan,Level)` creates a design for the specified level of the test plan. By default the level is the outer level (i.e., Level 1 for one-stage, Level 2 (global) for two-stage).

If you do not specify any properties, the method creates a default design type. The default design types are a Sobol Sequence for two or more inputs, and a Full Factorial for a single input.

`D = CreateDesign(Testplan,Level,prop1,value1,...)` creates a design with the specified properties.

`D = CreateDesign(Model)` creates a design based on the inputs of the `mbcmodel.model` object, `Model`.

`D = CreateDesign(Model,prop1,value1,...)` creates a design with the specified properties based on the inputs of the model.

`D = CreateDesign(Inputs)` creates a design based on the inputs of the `mbcmodel.modelinput` object, `Inputs`.

`D = CreateDesign(Inputs,prop1,value1,...)` creates a design with the specified properties based on the inputs.

`D = CreateDesign(Design)` creates a copy of an existing design.

Examples

To create a space-filling design for a test plan TP:

```
sfDesign = CreateDesign(TP, ...
    'Type', 'Latin Hypercube Sampling',...
    'Name', 'Space Filling');
```

Create an optimal design based on the inputs of a model:

```
optimalDesign = CreateDesign( model,...
    'Type', 'V-optimal',...
    'Name', 'Optimal Design' );
```

Create a classical full factorial design based on the inputs defined by a `mbcmodel.modelinput` object:

```
design = CreateDesign( inputs, 'Type', 'Full Factorial' );
```

Create a new design based on an existing design (`ActualDesign`) in order to augment it:

```
augmentedDesign = ActualDesign.CreateDesign('Name',...
    'Augmented Design');
```

Create a local level design for the two-stage test plan TP:

```
localDesign = TP.CreateDesign(1,'Type',...
    'Latin Hypercube Sampling');
```

Create a global level design for the two-stage test plan TP:

```
globalDesign = TP.CreateDesign(2, 'Type',...
    'Latin Hypercube Sampling');
```

See Also

Generate | `modelinput`

Introduced in R2008a

CreateModel

Create new model

Syntax

```
M = mbcmodel.CreateModel(Type, INPUTS)
NewModel = CreateModel(model, Type)
```

Description

`M = mbcmodel.CreateModel(Type, INPUTS)` This syntax is a function that creates an `mbcmodel.model` object of the specified `Type`.

`mbcmodel.linearmodel` and `mbcmodel.localmodel` are subclasses of `mbcmodel.model`. Model types that begin with the word “local” specify an `mbcmodel.localmodel` object.

`NewModel = CreateModel(model, Type)` This syntax is a function that creates a new model (of the specified `Type`) with the same inputs as an existing `model`. `model` is an `mbcmodel.model` object. You can use `getAlternativeTypes` to generate a list of valid model types. See `Type (for models)` for a list of valid model types. Spaces and case in `Type` are ignored.

`INPUTS` can be a `mbcmodel.modelinput` object, or any valid input to the `mbcmodel.modelinput` constructor. See `modelinput`.

Examples

To create a hybrid spline with four input factors, enter:

```
M = mbcmodel.CreateModel('Hybrid Spline', 4)
```

To create an RBF with four input factors, enter:

```
Inputs = mbcmodel.modelinput('Symbol', {'N', 'L', 'EXH', 'INT'}, ...
    'Name', {'ENGSPPEED', 'LOAD', 'EXHCAM', 'INTCAM'}, ...
    'Range', {[800 5000], [0.1 1], [-5 50], [-5 50]}');
```

```
RBFModel = mbcmodel.CreateModel('RBF', Inputs);
```

To create a polynomial with the same input factors as the previously created RBF, enter:

```
PolyModel = CreateModel(RBFModel, 'Polynomial')
```

See Also

[getAlternativeTypes](#) | [modelinput](#) | [CreateProject](#) | [CreateData](#) | [Type \(for models\)](#)

Introduced in R2007a

CreateProject

Create project object

Syntax

```
P = mbcmodel.CreateProject
```

Description

This is a function that creates an `mbcmodel.project` object.

P is the project object.

`P = mbcmodel.CreateProject` creates an `mbcmodel.project` called `Untitled`. `P = mbcmodel.CreateProject(NAME)` creates an `mbcmodel.project` called `NAME`.

Examples

```
P = mbcmodel.CreateProject;
```

Create a project called `MBT_Project`:

```
P = mbcmodel.CreateProject( 'MBT_Project' );
```

Introduced before R2006a

CreateResponse

Create new response model for test plan

Syntax

```
R = CreateResponse(T, Varname)
R = CreateResponse(T, Varname, Model)
R = CreateResponse(T, Varname, LocalModel, GlobalModel)
R = CreateResponse(T, Varname, LocalModel, GlobalModel, DatumType)
```

Description

This is a method of `mbcmodel.testplan`.

`R = CreateResponse(T, Varname)` creates a model of the variable `Varname` using the test plan's one- or two-stage default models. `T` is the test plan object, `R` is the new response object.

`R = CreateResponse(T, Varname, Model)` creates a one-stage model of `Varname`, where `T` must be a one-stage test plan object.

`R = CreateResponse(T, Varname, LocalModel, GlobalModel)` or `R = CreateResponse(T, Varname, LocalModel, GlobalModel, DatumType)` creates a two-stage model of `Varname`. `T` must be a two-stage test plan object. `DatumType` can only be specified if the local model type permits a datum model. Only the model types "Polynomial Spline" and "Polynomial with Datum" permit datum models.

`Varname` is the variable name for the new response.

`Model` is the One-stage model object (if you leave this field empty, the default is used).

`LocalModel` is the Local Model object (if you leave this field empty, the default is used).

`GlobalModel` is the Response Feature model object (if you leave this field empty, the default is used).

`DatumType` can be 'None' 'Maximum' 'Minimum' or 'Linked'.

Examples

To create a response using the default models, enter:

```
R = CreateResponse(T, 'torque');
TQ_response = CreateResponse(testplan, 'TQ');
```

To create a response and specify the local and global model types, enter:

```
models = T.DefaultModels
LocalModel = CreateModel(models{1}, 'Local Polynomial Spline');
GlobalModel = CreateModel(models{2}, 'RBF');
R = CreateResponse(T, 'TQ', LocalModel, GlobalModel, 'Maximum')
```

See Also

Responses

Introduced before R2006a

CreateResponseFeature

Create new response feature for local model

Syntax

```
RF = CreateResponseFeature(RF,RFTYPE)
RF = CreateResponseFeature(RF,RFTYPE,EvaluationPoint)
```

Description

This is a method of `mbcmodel.localresponse`.

`RF = CreateResponseFeature(RF,RFTYPE)` creates a response feature for `RFTYPE`.

`RF = CreateResponseFeature(RF,RFTYPE,EvaluationPoint)` creates a response feature for `RFTYPE` at `EvaluationPoint`.

`RFTYPE` is a description character vector belonging to the set of alternative response features for the current local model.

`EvaluationPoint` is a row vector with an element for each model input and is used for response features that require an input value to evaluate the response feature (e.g., function evaluation, derivatives). It is an error to specify an evaluation point for a response feature type that does not require an evaluation point.

You should use this method to add response features without refitting all local and global models.

Examples

```
RF = CreateResponseFeature(RF, 'Beta_1')
```

See Also

`ResponseFeatures(Local Model)`

Introduced in R2007b

CreateTestplan

Create new test plan

Syntax

```
T = CreateTestplan(P,TestPlanTemplate)
T = CreateTestplan(P,TestPlanTemplate,newtestplanname)
T = CreateTestplan(P,InputsPerLevel)
T = CreateTestplan(P,InputsPerLevel,newtestplanname)
T = CreateTestplan(P, Inputs)
T = CreateTestplan(P, Inputs, newtestplanname)
```

Description

This is a method of the `mbcmodel.project` object.

You can use this method with a test plan template or input information.

You set templates up in the Model Browser GUI. This setup includes number of stages, inputs, base models, and designs. If the test plan is used as part of a previous project it is also possible to save response models in the test plan. It is not possible to change the number of stages after creation of the test plan.

After you create a new test plan, you can add data to model, and new responses. Note that the model input signal names specified in the template *must* match the signal names in the data.

Use `CreateTestplan` in the following ways:

`T = CreateTestplan(P,TestPlanTemplate)` creates a test plan.

`T = CreateTestplan(P,TestPlanTemplate,newtestplanname)` creates a test plan with a name.

`P` is the project object.

`TestPlanTemplate` is the full name and path to the test plan template file created in the Model Browser.

`newtestplanname` is the optional name for the new test plan object.

`T = CreateTestplan(P,InputsPerLevel)` creates a test plan with the number of inputs per level.

`T = CreateTestplan(P,InputsPerLevel,newtestplanname)` creates a test plan with the inputs per level and a name.

`InputsPerLevel` is a row vector with number of inputs for each stage.

`T = CreateTestplan(P, Inputs)` creates a test plan with the number of inputs.

`T = CreateTestplan(P, Inputs, newtestplanname)` creates a test plan with the number of inputs and a name.

Inputs is a cell array with input information for each level. The input information can be specified as a cell array of `mbcmodel.modelinput` objects (one for each level), or as a cell array of cell arrays (one for each level).

Examples

To create a test plan using a test plan template, enter:

```
T = CreateTestplan(P1, 'd:\MBCwork\TQtemplate1', 'newtestplan')
testplan = CreateTestplan(P, 'example_testplan')
```

To create a test plan using inputs per level, enter:

```
T = P.CreateTestplan([1,2])
```

To specify the input information in a cell array of `mbcmodel.modelinput` objects, enter:

```
% Define Inputs for test plan
LocalInputs = mbcmodel.modelinput('Symbol','S',...
    'Name','SPARK',...
    'Range',[0 50]);
GlobalInputs = mbcmodel.modelinput('Symbol',{'N','L','ICP',...
    'ECP'},'Name',{'SPEED','LOAD','INT_ADV','EXH_RET'},...
    'Range',{[500 6000],[0.0679 0.9502],[-5 50],[-5 50]});
% create test plan
testplan = CreateTestplan( project, {LocalInputs,...
    GlobalInputs} );
```

Or

```
T = P.CreateTestplan({LocalInputs,GlobalInputs})
```

To specify the input information in a cell array, enter:

```
localInputs = {'S',0,50,'','SPARK'};
globalInputs = {'N', 800, 5000, '', 'ENGSPEED'
    'L', 0.1, 1, '', 'LOAD'
    'EXH', -5, 50, '', 'EXHCAM'
    'INT', -5, 50, '', 'INTCAM'};
```

```
T = CreateTestplan(P,{localInputs,globalInputs});
```

See Also

[AttachData](#) | [CreateResponse](#) | [Responses](#) | [Data](#) | [Levels](#) | [InputSignalNames](#) | [InputsPerLevel](#) | [Inputs](#) | [modelinput](#)

Introduced before R2006a

Data

Array of data objects in project, boundary tree, or test plan

Syntax

```
allD = project.Data  
allD = testplan.Data
```

Description

This is a property of `mbcmodel.project`, `mbcmodel.testplan`, and `mbcboundary.Tree`.

For projects and test plans, it returns an array of `mbcmodel.data` objects. A project can have many data objects, but a test plan can only have one or none.

`Tree.B.Data` returns a double matrix for one-stage, response, and global boundary models. For local boundary models, `Data` is a cell array of double matrices with one cell per test. For boundary models, `Data` is read-only.

Examples

```
allD = P.Data;
```

For a project object `P`, this example returns an `nx1` array of all the data objects.

```
allD = T.Data;
```

For the test plan object `T`, this example returns a `1x1` array if the test plan has a data object attached, and `0x1` otherwise.

See Also

[CreateData](#) | [RemoveData](#) | [CopyData](#)

DataFileTypes

Data file types

Syntax

```
f = mbcmodel.DataFileTypes
```

Description

This is a function to return a list of data file types for mbcmodel.

Examples

```
f = mbcmodel.DataFileTypes
```

```
f =
```

```
Columns 1 through 4  
    'Excel file'      'FT/DB data files'    'Delimited Text File'  
[1x25 char]  
Column 5  
    'MATLAB Data File'
```

See Also

[ImportFromFile](#) | [CreateData](#)

Introduced in R2007a

DefaultModels

Default models for test plan

Syntax

```
testplan.DefaultModels
```

Description

This is a read-only property of `mbcmodel.testplan`. It returns a cell array of `mbcmodel.model` objects (one array for each stage).

Examples

To get the default model objects for use in creating a response, enter:

```
models = T.DefaultModels  
LocalModel = CreateModel(models{1}, 'Local Polynomial Spline');  
GlobalModel = CreateModel(models{2}, 'RBF');  
R = CreateResponse(T, 'TQ', LocalModel, GlobalModel, 'Maximum')
```

See Also

[CreateResponse](#) | [modelinput](#)

designconstraint

Convert boundary model to design constraint

Syntax

```
C = designconstraint(C)
```

Description

This is a method of `mbcboundary.AbstractBoundary` and all its subclasses (e.g., `mbcboundary.Model`).

`C = designconstraint(C)` converts the boundary model `C` to an `mbcdoe.designconstraint` object. Convert boundary models to use them as a design constraint. You cannot convert the boundary model to a design constraint until it is fitted (`Fitted=true`).

You can also call `mbcdoe.design.AddConstraint` directly and the method converts the boundary model object to a `mbcdoe.designconstraint` object.

See Also

`AddConstraint`

Introduced in R2009b

Designs

Designs in test plan

Syntax

```
D = T.Designs
```

Description

Designs is a property of `mbcmodel.testplan`.

`D = T.Designs` returns a cell array of designs in the test plan, T, one element for each level.

When using designs at the command line, designs are treated as an array. In the Design Editor you can build a design tree, where child designs inherit characteristics such as constraints from the parent design. At the command line you can copy and modify designs. By default, designs are added to the top level of the design tree. To build tree structures at the command line, you can use the `Parent` argument of the `AddDesign` method to specify the parent design in the design tree. The tree structure cannot be used at the command line any further, but you can use the design tree in the Design Editor after you load the project into the Model Browser.

Examples

To get local designs only:

```
LocalDesigns = T.Designs{1}
```

To get global designs only:

```
GlobalDesigns = T.Designs{2}
```

To get the fifth global design:

```
D = T.Design {2}(5)
```

After modifying the design, you must call `UpdateDesign`, or reassign to the test plan as follows:

```
T.Design {2}(5) = D
```

See Also

`UpdateDesign`

DetachData

Detach data from test plan

Syntax

```
T = DetachData(T)
```

Description

This is a method of `mbcmodel.testplan`.

T is the test plan object. A test plan can only use a single dataset, so you do not need to specify the data object.

Examples

```
DetachData(T1);
```

See Also

`AttachData`

Introduced before R2006a

DiagnosticStatistics

Diagnostic statistics for response

Syntax

```
S = DiagnosticStatistics(R)
S = DiagnosticStatistics(R, Stats)
S = DiagnosticStatistics(LocalR, TestNumbers)
S = DiagnosticStatistics(LocalR, TestNumbers, Stats)
```

Description

This is a method of the local and response model objects, `mbcmodel.localresponse` and `mbcmodel.response`.

The options available are model-specific and are the same options shown in the drop-down menus of the scatter plots (the top plots) in the local and global (response feature) model views of the toolbox GUI.

`S = DiagnosticStatistics(R)` returns `S`, a structural array containing `Statistics` and `Names` fields. `R` is the response or local response model object.

`S = DiagnosticStatistics(R, Stats)` allows you to specify `Stats`, an optional input that defines which diagnostic statistics you want from the available list. If you don't specify `Stats`, you get all available statistics.

`S = DiagnosticStatistics(LocalR, TestNumbers)` returns `S` for `LocalR`, a local response object, and `Testnumbers` specifies the index into tests for local or hierarchical models.

Use `S = DiagnosticStatistics(LocalR, TestNumbers, Stats)` to specify which diagnostic statistics you want from the available list.

A row is set to NaN if that point is removed.

Examples

```
studentRes = DiagnosticStatistics(local, tn, 'Studentized
residuals');
```

See Also

[SummaryStatistics](#) | [AlternativeModelStatistics](#)

Introduced before R2006a

Discrepancy

Discrepancy value

Syntax

```
s = Discrepancy(D)
```

Description

Discrepancy is a method of `mbcdoe.design`.

`s = Discrepancy(D)` returns the discrepancy, which is a measure of the deviation from the average point density. Discrepancy is defined over the unconstrained design and is only available for space-filling designs.

See Also

Maximin | Minimax

Introduced in R2008a

DoubleInputData

Data being used as input to model

Syntax

```
X = DoubleInputData(R, TestNumber)
```

Description

This is a method of all model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`. It returns an array (X) containing the input data used for fitting the model.

R is the response model object.

TestNumber is an optional input to specify the tests you want.

Examples

```
X = DoubleInputData(R);  
x = DoubleInputData(local, tn);
```

See Also

DoubleResponseData

Introduced before R2006a

DoubleResponseData

Data being used as output to model for fitting

Syntax

```
Y = DoubleResponseData(R, TestNumber)
```

Description

This is a method of all model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`. It returns an array (Y) containing the response data used for fitting the model.

R is the response model object.

TestNumber is an optional input to specify the tests you want.

Examples

```
Y = DoubleResponseData(R);  
y = DoubleResponseData(local, tn);
```

See Also

DoubleInputData

Introduced before R2006a

Evaluate

Evaluate model, boundary model, or design constraint

Syntax

```
Y = Evaluate(M, X)
Y = Evaluate(C, X)
Y = Evaluate(B, X)
```

Description

This is a method of `mbcmodel.model`, `mbcdoe.designconstraint`, and boundary model object `mbcboundary.AbstractBoundary` and all its subclasses.

`Y = Evaluate(M, X)` evaluates the model `M` at `X`.

`Y = Evaluate(C, X)` evaluates the design constraint `C` at `X` (negative results are within the constraint).

`Y = Evaluate(B, X)` evaluates the boundary model `B` at `X`. `X` is a matrix with `B.NumInputs` columns. All boundaries use the form $g(x)=0$. A positive value indicates that the point is outside the boundary. The method cannot evaluate a boundary model until it is fitted.

`X` is a (*numpoints-by-nfactors*) array.

`Y` is a (*numpoints-by-1*) array.

See Also

[PredictedValue](#) | [PEV](#)

Introduced in R2007a

Export

Make command-line or Simulink export model

Syntax

```
ExportedModel = Export(MODEL)
ExportedModel = Export(MODEL, Format)
```

Description

This is a method of these model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse`, `mbcmodel.response` and `mbcmodel.model`.

`ExportedModel = Export(MODEL)` exports the model to MATLAB software. `ExportedModel` is an `xregstatsmodel` object, that you can use to evaluate the model and calculate the prediction error variance. If you convert an `mbcmodel.localresponse` object and you have not created a two-stage model (hierarchical response object), then the output is an `mbcPointByPointModel` object that you can use to evaluate the model and calculate the prediction error variance.

`ExportedModel = Export(MODEL, Format)` exports the model in the specified format, which can be 'MATLAB' or 'Simulink'.

`Format` must be 'MATLAB' or 'Simulink'; an error will be thrown if this is incorrect.

You can evaluate models exported to the MATLAB workspace in the same way as when you export them from the Model Browser. You can save these models as a *.mat file and load them into CAGE.

`Model` is the object containing the response models from the node you are exporting from.

Examples

```
M = Export(R2, 'MATLAB');
mbt_model = Export(maxTQ, 'MATLAB');
```

See Also

`xregstatsmodel`

Introduced before R2006a

Filename

Full path to project file

Syntax

Name = P.Filename

Description

This is a property of `mbcmodel.project`.

Examples

Name = P.Filename;

FindDesign

Find design by name

Syntax

```
D = FindDesign(T,Name)
D = FindDesign(T,Level,Name)
```

Description

FindDesign is a method of `mbcmodel.testplan`.

`D = FindDesign(T,Name)` finds a design with a matching name from the test plan T.

Name is a character vector or a cell array of character vectors specifying a design name.

Level is the test plan level. By default the level is the outer level (i.e., Level 1 for one-stage, Level 2 (global) for two-stage).

`D = FindDesign(T,Level,Name)` finds a design with a matching name from the specified level of the test plan.

Introduced in R2008a

FitAlgorithm

Fit algorithm for model or boundary model

Syntax

```
F = M.FitAlgorithm
```

Description

This is a property of `mbcmodel.model`, and boundary model objects `mbcboundary.AbstractBoundary` and all subclasses.

An `mbcmodel.model.FitAlgorithm` object is contained within the `FitAlgorithm` property of an `mbcmodel.model` object or `mbcboundary` object. This object has a `Name` property, and the following methods: `CreateAlgorithm`, `getAlternativeNames`, `IsAlternative`, `SetupDialog`, properties.

As a simpler alternative to using `CreateAlgorithm`, you can assign the algorithm name directly to the algorithm. For example:

```
B.FitAlgorithm.BoundaryPointOptions = 'Boundary Only';  
m.FitAlgorithm = 'Minimize PRESS';
```

Case and spaces are ignored.

For properties, see `CreateAlgorithm`.

Examples

To get a fitalgorithm object, `F`, from a model:

```
M = mbcmodel.CreateModel('Polynomial', 4);  
F = M.FitAlgorithm  
  
F =  
Algorithm: Least Squares  
Alternatives: 'Minimize PRESS', 'Forward Selection', 'Backward  
Selection', 'Prune'  
1x1 struct array with no fields.
```

See Also

`CreateAlgorithm` | `getAlternativeNames` | `IsAlternative` | `SetupDialog`

fit

Fit model or boundary model to new or existing data, and provide summary statistics

Syntax

```
[model,statistics] = fit(model,X,Y)
[model,statistics] = fit(model)
```

Description

This is a method of `mbcmodel.model` and `mbcboundary.Model`.

`[model,statistics] = fit(model,X,Y)` This fits the model to the specified data. After you have called `fit` specifying the data to use, then you can refit the model by calling `[model,statistics] = fit(model)`.

Examples

```
statistics = fit(knot)
statistics =
    27.0000    7.0000    1.0000    3.0184    2.6584
```

See Also

[SummaryStatistics](#) | [UpdateResponse](#)

Introduced before R2006a

Fitted

Indicate whether boundary model has been fitted

Syntax

Fitted(B)

Description

This is a property of `mbcboundary.AbstractBoundary` and all its subclasses.

`Fitted(B)` indicates whether boundary model `B` has been fitted (read only). You cannot evaluate the boundary model unless `fitted` equals `true`.

Introduced in R2009b

FixPoints

Fix design points

Syntax

```
D = FixPoints(D)
D = FixPoints(D,indices)
```

Description

FixPoints is a method of `mbcdoe.design`.

`D = FixPoints(D)` fixes all points in the design.

`D = FixPoints(D,indices)` fixes all points specified by `indices`.

See Also

`PointTypes` | `RemovePoints`

Introduced in R2008a

Generate

Generate new design points

Syntax

```
D = Generate(D)
D = Generate(D, NumPoints)
D = Generate(D, 'Prop1', value1, ...)
```

Description

`Generate` is a method of `mbcdoe.design`. The `Generate` method always generates a new design and replaces the existing points (fixed or free).

`D = Generate(D)` regenerates the design with the current generator settings (the current design properties and current number of points). It is possible that a different design will result (e.g., for Latin Hypercube Sampling designs).

`D = Generate(D, NumPoints)` generates the number of points specified by `NumPoints` using the current generator settings. You cannot specify the number of points for all design types (e.g., Central Composite, Box Behnken) and therefore the `NumPoints` second input is not supported for all design types.

`D = Generate(D, 'Prop1', value1, ...)` generates a new design with the generator specified by the generator property value pairs.

You can use the property value pairs to specify design generator properties (such as the design Type) as part of the `Generate` command, e.g.,

```
C = OptDesign.CreateCandidateSet(OptDesign, ...
    'Type', 'Grid', ...
    'NumberOfLevels', [21 21 21]);
```

```
OptDesign = Generate(OptDesign, ...
    'Type', 'V-optimal', ...
    'CandidateSet', C, ...
    'MaxIterations', 200, ...
    'NoImprovement', 50, ...
    'NumberOfPoints', 200);
```

This is equivalent to the following code setting the properties individually and then assigning the updated generator object to the design:

```
P = OptDesign.Generator;
P.Type = 'V-optimal';
P.CandidateSet.NumberOfLevels(:)=21;
P.MaxIterations = 200;
P.NumberOfPoints = 200;
P.NoImprovement = 50;
OptDesign.Generator = P;
```

You see an error if you try to call `Generate` when the design `Style` is `User-defined` or `Experimental` data.

For space-filling designs, see also `ConstrainedGenerate`. Using `Generate` with constrained space-filling is not guaranteed to produce a design with the specified number of points. Use `ConstrainedGenerate` instead.

Examples

To generate a design with 10 points:

```
d = Generate( d, 10 );
```

Note The design `Type` must have a writable property `NumberOfPoints` to use this syntax `D = Generate(D, NumPoints)`. See `Type` (for designs and generators).

To create and generate a 15 point latin hypercube sampling design:

```
globalDesign = TP.CreateDesign(2, 'Type', ...
    'Latin Hypercube Sampling');
globalDesign = Generate(globalDesign, 15)
```

To regenerate the design and get a different 15 point latin hypercube sampling design:

```
globalDesign = Generate(globalDesign);
```

To create and generate a halton design with 50 points:

```
haltonDesign = CreateDesign( inputs, 'Type', ...
    'Halton Sequence', 'Name', 'Halton' );
haltonDesign = Generate( haltonDesign, 'NumberOfPoints', 50 );
```

To create and generate a halton design with specified scrambling and other properties:

```
haltonDesignWithScrambling = haltonDesign.CreateDesign...
( 'Name', 'Scrambled Halton' );
haltonDesignWithScrambling = Generate...
(haltonDesignWithScrambling,
    'Scramble', 'RR2', 'PrimeLeap', true );
```

To create a full factorial design and specify the number of levels when generating the design:

```
design = CreateDesign( inputs, 'Type', 'Full Factorial' );
design = Generate( design, 'NumberOfLevels', [50 50] );
```

See Also

[Augment](#) | [CreateDesign](#) | [ConstrainedGenerate](#)

Introduced in R2008a

Generator

Design generation options

Syntax

```
D.Generator  
D.Generator = NewGenerator
```

Description

Generator is a property of `mbcdoe.design`.

`D.Generator` returns an `mbcdoe.generator` object.

`D.Generator = NewGenerator` generates a new design based on the new design generator. Design generators provide the properties for all the design types.

The properties you can set depend on the design Type. To view the properties for generating designs, see [Properties \(for design generators\)](#).

Use `getAlternativeTypes` to get a list of alternative generators.

See Also

[Generate | Properties \(for design generators\) | Type \(for designs and generators\) | getAlternativeTypes](#)

GetAllTerms

List all model terms

Syntax

```
Terms = M.Properties.GetAllTerms
```

Description

This is a method of `mbcmodel.linearmodelproperties`.

`Terms = M.Properties.GetAllTerms` returns a list of all terms in this model. `M` is an `mbcmodel.linearmodel` object.

`Terms` is a (*numterms-by-nfactors*) array. The $(m,n)^{\text{th}}$ element is the power of the n^{th} factor in the m^{th} term.

Examples

The following example creates a model, and finds which terms are quadratic in the first input factor (X1):

```
model = mbcmodel.CreateModel('Polynomial', 2)
model =
    1 + 2*X1 + 8*X2 + 3*X1^2 + 6*X1*X2 + 9*X2^2 + 4*X1^3
    + 5*X1^2*X2 + 7*X1*X2^2 + 10*X2^3
    InputData: [0x2 double]
    OutputData: [0x1 double]
    Status: Not fitted
    Linked to Response: <not linked>

>>terms = model.Properties.GetAllTerms;
>>x1quadraticterms = find(terms(:,1)==2)

x1quadraticterms =
     4
     8
```

See Also

[GetIncludedTerms](#)

Introduced in R2007a

getAlternativeNames

List alternative algorithm names

Syntax

```
F.getAlternativeNames  
AltList = getAlternativeNames(F)
```

Description

This is a method of `mbcmodel.fitalgorithm`.

`F.getAlternativeNames` or `AltList = getAlternativeNames(F)` return a cell array of alternative algorithm names. `F` is a `mbcmodel.fitalgorithm` object.

Examples

```
model = mbcmodel.CreateModel('Polynomial', 2);  
F = model.FitAlgorithm;  
altAlgs = F.getAlternativeNames  
  
altAlgs =  
  
    'Least Squares'    'Minimize PRESS'    'Forward Selection'  
'Backward Selection'    'Prune'
```

See Also

[CreateAlgorithm](#) | [IsAlternative](#)

Introduced in R2007a

getAlternativeTypes

Alternative model or design types

Syntax

```
list = getAlternativeTypes(Model)
list = getAlternativeTypes(Boundary)
list = getAlternativeTypes(Design)
list = getAlternativeTypes(Design,Style)
list = getAlternativeTypes(DesignGenerator)
list = getAlternativeTypes(DesignGenerator,Style)
list = getAlternativeTypes(CandidateSet)
list = getAlternativeTypes(DesignConstraint)
```

Description

This is a method of

- `mbcmodel.model`
- All the boundary model objects: `mbcboundary.AbstractBoundary` and all its subclasses.
- All the design objects: `mbcdoe.design`, `mbcdoe.generator`, `mbcdoe.candidateset`, and `mbcdoe.designconstraint`.

Models

`list = getAlternativeTypes(Model)` returns a cell array of alternative model types with the same number of inputs as `Model`.

Boundary Models

`list = getAlternativeTypes(Boundary)` returns a list of boundary model types that you can use as alternative boundary model types for the current boundary model.

Designs

`list = getAlternativeTypes(Design)` returns a list of design types, which you can use as alternative designs for current design.

`list = getAlternativeTypes(Design,Style)` returns a list of design types of the specified style. The design style requires a type of 'Space-Filling', 'Classical' or 'Optimal'.

Design Generators

`list = getAlternativeTypes(DesignGenerator)` returns a list of design generator types that you can use as alternative designs for current design generator.

`list = getAlternativeTypes(DesignGenerator,Style)` returns a list of design generator types of the specified style. The design generator style requires a type of 'Candidate Set', 'Space-Filling', 'Classical' or 'Optimal'.

Design Candidate Sets

`list = getAlternativeTypes(CandidateSet)` is a list of candidate set types that you can use as alternative candidate sets for the current candidate set. You can obtain the candidate set from an optimal design generator or by using `mbcdoe.design.CreateCandidateSet`.

Design Constraints

`list = getAlternativeTypes(DesignConstraint)` returns a list of design constraint types.

Examples

```
model = mbcmodel.CreateModel('RBF', 2);  
altmodels = getAlternativeTypes(model)
```

This produces the output:

```
altmodels =
```

```
Columns 1 through 6
```

```
'Polynomial' 'Hybrid Spline' 'RBF' 'Polynomial-RBF'  
'Hybrid Spline-RBF' 'Multiple Linear'
```

```
Columns 7 through 8
```

```
'Neural Network' 'Transient'
```

See Also

Type (for models) | `CreateModel`

Introduced in R2007a

GetIncludedTerms

List included model terms

Syntax

```
Terms = M.Properties.GetIncludedTerms
```

Description

This is a method of `mbcmodel.linearmodelproperties`.

`Terms = M.Properties.GetIncludedTerms` returns a list of those terms that will be used to fit the model. `M` is an `mbcmodel.linearmodel` object.

`Terms` is a (*numincludedterms-by-nfactors*) array. The $(m,n)^{\text{th}}$ element is the power of the n^{th} factor in the m^{th} included term.

Examples

```
>>model = mbcmodel.CreateModel('Polynomial', 2);

>>includedterms = model.Properties.GetIncludedTerms;
>>x1quadraticterms = find(includedterms(:,1)==2)

x1quadraticterms =

     4
     8
```

See Also

[GetAllTerms](#) | [SetTermStatus](#)

Introduced in R2007a

getLocalBoundary

Local boundary model for operating point

Syntax

`getLocalBoundary(B)`

Description

This is a method of `mbcboundary.TwoStage`.

`getLocalBoundary(B)` returns the definition of the local boundary model.

Introduced in R2009b

GetTermLabel

List labels for model terms

Syntax

```
Labels = M.Properties.GetTermLabel
Labels = M.Properties.GetTermLabel( Terms )
Labels = M.Properties.GetTermLabel( Terms, 'Format', OutputFormat )
```

Description

This is a method of `mbcmodel.linearmodelproperties`, which returns a user-friendly label for one or more specified terms.

`Labels = M.Properties.GetTermLabel` lists the labels.

`Labels = M.Properties.GetTermLabel(Terms)` lists the labels with the specified terms.

`Labels = M.Properties.GetTermLabel(Terms, 'Format', OutputFormat)` lists the labels with the specified terms and format.

`M` is an `mbcmodel.linearmodel` object.

The specified terms form a row where each value gives the power of that parameter. `OutputFormat` can be 'List' or 'Formula'.

Examples

```
model = mbcmodel.CreateModel('Polynomial', 2);
model.Properties.GetTermLabel([1 2; 1 0] )
```

produces {'X1*X2^2'; 'X1'} and

```
model.Properties.GetTermLabel([1 2; 1 0], 'Format', 'Formula' )
```

produces 'X1*X2^2 + X1'.

See Also

[GetAllTerms](#) | [GetIncludedTerms](#)

Introduced in R2007a

GetTermStatus

List status of some or all model terms

Syntax

```
Status = M.Properties.GetTermStatus  
Status = M.Properties.GetTermStatus(Terms)
```

Description

This is a method of `mbcmodel.linearmodelproperties`.

`Status = M.Properties.GetTermStatus` returns the status of all of the terms in this model. `Status` is a cell array of status character vectors. `M` is an `mbcmodel.linearmodel` object.

`Status = M.Properties.GetTermStatus(Terms)` returns the status of the specified terms in this model.

The stepwise status for each term can be 'Always', 'Never' or 'Step'. The status determines whether you can use the `StepwiseRegression` function to throw away terms in order to try to improve the predictive power of the model.

Examples

```
model = mbcmodel.CreateModel('Polynomial', 2);
```

Get status of X_2^3 term:

```
status = model.Properties.GetTermStatus([0 3])
```

```
status =
```

```
    'Step'
```

Get status of all terms linear in X_1 :

```
status = model.Properties.GetTermStatus([1 0; 1 1; 1 2])
```

```
status =
```

```
    'Step'
```

```
    'Step'
```

```
    'Step'
```

See Also

[SetTermStatus](#) | [StepwiseStatus](#)

Introduced in R2007a

Global

Global boundary model tree

Syntax

`Global(B)`

Description

This is a property of `mbcboundary.TwoStageTree`.

`Global(B)` The `Global` property contains a global boundary model tree (read only).

The toolbox fits boundary models in the global model boundary tree with one point per test (the average value of the global variables for that test).

Introduced in R2009b

GlobalModel

Interpolating global boundary model definition

Syntax

`B.GlobalModel`

Description

This is a property of `mbcboundary.TwoStage`.

`B.GlobalModel` returns the definition of global boundary model. `GlobalModel` requires the type `Interpolating RBF`.

InBest

Boundary models selected as best

Syntax

```
mbcboundary.Tree.InBest
```

Description

This is a property of `mbcboundary.Tree` and `mbcboundary.TwoStageTree`.

`mbcboundary.Tree.InBest` Specify a logical array indicating which boundary models to select as best.

You can combine models into a single boundary model for the boundary tree. The logical array specifies which models to include in the best boundary model. The `BestModel` property gives the best boundary model for the boundary tree.

Including boundary models `InBest` corresponds to combining boundary models in best in the Boundary Editor. For further information, see “Combining Best Boundary Models” in the Model Browser documentation.

See Also

`BestModel`

InputData

Input data for model

Syntax

```
D = M.InputData
```

Description

This is a property of `mbcmodel.model`. It returns an array of the input variable data currently in the model.

Examples

```
D = knot.InputData;
```

See Also

`OutputData`

Inputs

Inputs for test plan, model, boundary model, design, or constraint

Syntax

`testplan.Inputs`

`model.Inputs`

`design.Inputs`

`boundary.Inputs`

Description

This is a property of `mbcmodel.testplan`, `mbcmodel.model`, `mbcdoe.design`, `mbcdoe.designconstraint`, and boundary model object `mbcboundary.AbstractBoundary` and all its subclasses.

For `mbcmodel.testplan`, this property returns a cell array of `mbcmodel.modelinput` objects (one array for each stage). You cannot change the number of stages after creation of the test plan.

For `mbcmodel.model` and `mbcboundary` objects, this property returns an `mbcmodel.modelinput` object. You cannot edit this object when it is attached to a response. You cannot change number of inputs after creation.

In both cases, verification of valid variable names and symbols occurs before assigning inputs to model at the command line. Names and Symbols must be unique.

Boundary model inputs use an array of `mbcmodel.modelinput` objects. You set the number of boundary model inputs when you create the boundary model. You can change the name, symbol, and range of the inputs.

For `mbcdoe.design`, `D.Inputs = NewInputs` updates the inputs. You cannot change the number of design inputs. Many designs have `Limits` properties in addition to model input ranges. These properties allow you to restrict the range of the design without changing the model or losing points via a constraint.

See Also

`CreateTestplan` | `modelinput`

InputSetupDialog

Open Input Setup dialog box to edit inputs

Syntax

```
[NEWMODEL, OK] = InputSetupDialog(OLDMODEL)  
[NEWTTESTPLAN, OK] = InputSetupDialog(OLDTESTPLAN)
```

Description

This is a method of `mbcmodel.model` and `mbcmodel.testplan`.

`[NEWMODEL, OK] = InputSetupDialog(OLDMODEL)` opens the Input Setup dialog box, where you can edit the model inputs (names, symbols, and ranges).

`[NEWTTESTPLAN, OK] = InputSetupDialog(OLDTESTPLAN)` opens the Input Setup dialog box, where you can edit the test plan inputs (names, symbols, and ranges).

If you click **Cancel** to dismiss the dialog box, `OK = false` and `NEWMODEL = OLDMODEL`. If you click **OK** to close the dialog box, then `OK = true` and `NEWMODEL` is your new chosen model setup. The new model is refitted when you click OK.

Introduced in R2007a

InputSignalNames

Names of signals in data that are being modeled

Syntax

```
inputs = A.InputSignalNames
```

Description

This is a property of `mbcmodel.testplan` and the modeling objects `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`.

A can be a test plan (T) or model (L, R, HR) object.

Examples

```
inputs = T.'InputSignalNames';  
InputFactors = thisRF.InputSignalNames';
```

See Also

`mbcmodel.data`

InputsPerLevel

Number of inputs at each level in model

Syntax

```
L = T.InputsPerLevel
```

Description

This is a property of `mbcmodel.testplan`.

This is a vector of length `Levels`. Each element defines the number of inputs at that level. See “Understanding Model Structure for Scripting” for an explanation of the levels in a test plan.

Examples

```
L = T.InputsPerLevel  
L =  
    2  4
```

This answer means the test plan T has 2 local inputs and 4 global inputs.

See Also

`Levels` | `Level`

IsAlternative

Test alternative fit algorithm

Syntax

```
OK = IsAlternative(F1, F2)
```

Description

This is a method of `mbcmodel.fitalgorithm`.

`OK = IsAlternative(F1, F2)` tests whether `F` is an alternative `mbcmodel.fitalgorithm` for `F1`.

See Also

`CreateAlgorithm` | `getAlternativeNames`

Introduced in R2007a

IsBeingEdited

Boolean signaling if data or model is being edited

Syntax

```
OK = D.IsBeingEdited
```

Description

This is a property of `mbcmodel.data` and `mbcmodel.model`.

This Boolean property indicates that the data or model is currently being edited.

For data, it also indicates that previously there was a successful call to `BeginEdit` and hence that whatever changes have been applied can be undone by calling `RollbackEdit`. It does not indicate that a call to `CommitEdit` will necessarily succeed. See `CommitEdit` for an example of this case.

Examples

```
OK = D.IsBeingEdited;
```

```
OK = knot.IsBeingEdited;
```

See Also

`BeginEdit` | `CommitEdit` | `RollbackEdit` | `mbcmodel.data`

Jacobian

Calculate Jacobian matrix for model at existing or new X points

Syntax

```
J = Jacobian(model, optional X)
```

Description

This is a method of `mbcmodel.model`.

This calculates the Jacobian matrix for the model at existing or new X points. If X is not specified then the existing data is used. The Jacobian is the regression matrix for linear models and RBF models.

The Jacobian matrix (for linear and RBF models) is the same as the Regression Matrix in the Design Evaluation Tool GUI. These matrices only include the terms currently selected in the model.

If all terms are included (none removed by Stepwise) then the Jacobian (for linear and RBF models) is the same as the Full FX matrix found in the Design Evaluation Tool GUI. The Jacobian matrix only includes the currently selected model terms.

To determine the condition number, use the MATLAB command `cond(J)`.

Examples

```
J = Jacobian(knot)
```

Introduced before R2006a

Level

Level in test plan of response

Syntax

```
level = R.Level
```

Description

This is a property for all model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`.

R is the response for which you want the level.

The level is usually 0 for hierarchical models, usually 1 for local models, and usually 2 or 1 for response models. See “Understanding Model Structure for Scripting” for an explanation of what `Level` indicates about a response.

Examples

```
level = R.Level;
```

See Also

Levels

Levels

Number of levels in hierarchical model

Syntax

```
levels = T.Levels
```

Description

This is a property of `mbcmodel.testplan`.

See “Understanding Model Structure for Scripting” for an explanation of what `Levels` mean.

Examples

```
levels = T.Levels;
```

See Also

`Level`

Load

Load existing project file

Syntax

```
P = Load(P, Filename)
```

Description

This is a method of `mbcmodel.project`.

`P` is a project object, and `Filename` is the full path to the project you want to load.

Examples

```
P2 = Load(P2, 'D:/MBCwork/TQproject2.mat');
```

See Also

New

Introduced before R2006a

LoadProject

Load mbcmodel.project

Syntax

```
P = mbcmodel.LoadProject(filename)
```

Description

`P = mbcmodel.LoadProject(filename)` loads a `mbcmodel.project` from the file `filename`.

See Also

CreateProject | Load

Introduced in R2007a

Local

Local boundary model tree

Syntax

Description

This is a property of `mbcboundary.TwoStageTree`.

The `Local` property contains a local boundary model tree (read only).

Point-by-point and two-stage boundary models are fitted in the local boundary model tree. These boundary models fit local boundary models for each operating point and combine into a single boundary model that includes the global inputs.

Introduced in R2009b

LocalBoundaries

Array of local boundary models for each operating point

Syntax

LocalBoundaries(B)

Description

This is a property of `mbcboundary.PointByPoint`.

`LocalBoundaries(B)` returns a cell array of local boundary models for each operating point (read only).

Introduced in R2009b

LocalModel

Definition of local boundary model

Syntax

`B.LocalModel`

Description

This is a property of `mbcboundary.PointByPoint` and `mbcboundary.TwoStage`.

`B.LocalModel` returns the definition of the local boundary model for every operating point.

For `mbcboundary.TwoStage`, `LocalModel` requires a type of either `Range` or `Ellipsoid`.

For `mbcboundary.PointByPoint`, the `LocalModel` type can be any valid type for `mbcboundary.Model` (such as `Range`, `Ellipsoid`, `Star-shaped`, or `Convex Hull`).

LocalModel Properties

Edit local model properties

Syntax

```
Props = localmodel.Properties
```

Description

This is a property of the `mbcmodel.localmodel` object, which is a subclass of `mbcmodel.model`.

See “Understanding Model Structure for Scripting” for an explanation of the relationship between the different response types.

Every local model object has an `mbcmodel.modelproperties` object (within the Properties property). In this object, each local model type has specific properties, as described in the following tables.

Local Polynomial Properties

Property	Description
Order	Polynomial order (vector int: {[0,Inf],2})
InteractionOrder	Maximum order of interaction terms (int: [0,Inf])
TransformInputRange	Transform inputs (Boolean)
ParameterNames	List of parameter names (read-only)
StepwiseStatus	Stepwise status {'Always', 'Never', 'Step'} (cell)
Transform	Transform function (char) or empty ('')
CovarianceModel	Covariance Model (enum: {'None', 'Power', 'Exponential', 'Mixed'})
CorrelationModel	Correlation Model (enum: {'None', 'MA(1)', 'AR(1)', 'AR(2)'})

Local Hybrid Spline Properties

Property	Description
Order	Spline and polynomial order (vector int: $\{[0, 3], 2\}$)
SplineVariable	Spline variable
SplineInteraction	Order of interaction between spline and polynomial (int: $[0, 3]$)
Knots: Position of knots (vector real)	ParameterNames: List of parameter names (read-only)
StepwiseStatus	Stepwise status {'Always', 'Never', 'Step'} (cell)
Transform	Transform function (char) or empty ('')
CovarianceModel	Covariance Model (enum: {'None', 'Power', 'Exponential', 'Mixed'})
CorrelationModel	Correlation Model (enum: {'None', 'MA(1)', 'AR(1)', 'AR(2)'})

Local Polynomial Spline Properties

Property	Description
HighOrder	Polynomial order above knot (int: $[2, Inf]$)
LowOrder	Polynomial order below knot (int: $[2, Inf]$)
Transform	Transform function (char) or empty ('')
CovarianceModel	Covariance Model (enum: {'None', 'Power', 'Exponential', 'Mixed'})
CorrelationModel	Correlation Model (enum: {'None', 'MA(1)', 'AR(1)', 'AR(2)'})
DatumType	Datum Type (enum: {'None', 'Maximum', 'Minimum', 'Linked'})

Local Polynomial With Datum Properties

Property	Description
Order	Polynomial order (int: [0, Inf])
Transform	Transform function (char) or empty ('')
CovarianceModel	Covariance Model (enum: {'None', 'Power', 'Exponential', 'Mixed'})
CorrelationModel	Correlation Model (enum: {'None', 'MA(1)', 'AR(1)', 'AR(2)'})
DatumType	Datum Type (enum: {'None', 'Maximum', 'Minimum', 'Linked'})

Local Free Knot Spline Properties

Property	Description
Order	Spline Order (int: [0, Inf])
NumKnots	Number of knots (int: 'Positive')
Transform	Transform function (char) or empty ('')
CovarianceModel	Covariance Model (enum: {'None', 'Power', 'Exponential', 'Mixed'})
CorrelationModel	Correlation Model (enum: {'None', 'MA(1)', 'AR(1)', 'AR(2)'})

Local Truncated Power Series Properties

Property	Description
Order	Polynomial order (int: 'Positive')
NumKnots	Number of knots (int: 'Positive')
Transform	Transform function (char) or empty ('')
CovarianceModel	Covariance Model (enum: {'None', 'Power', 'Exponential', 'Mixed'})
CorrelationModel	Correlation Model (enum: {'None', 'MA(1)', 'AR(1)', 'AR(2)'})

Local Growth Properties

Property	Description
Model	Growth model (enum: {'expgrowth', 'gomp', 'logistic', 'logistic4', 'mmf', 'richards', 'weibul'})
AlternativeModels	List of growth models (read-only)
Transform	Transform function (char) or empty ('')
TransformBothSides	Transform both sides (Boolean)
CovarianceModel	Covariance Model (enum: {'None', 'Power', 'Exponential', 'Mixed'})
CorrelationModel	Correlation Model (enum: {'None', 'MA(1)', 'AR(1)', 'AR(2)'})

Local User-Defined Properties

Property	Description
Model	Name of user-defined model (enum: {'exponential'})
AlternativeModels	List of registered user-defined models (read-only)
Transform	Transform function (char) or empty ('')
TransformBothSides	Transform both sides (Boolean)
CovarianceModel	Covariance Model (enum: {'None', 'Power', 'Exponential', 'Mixed'})
CorrelationModel	Correlation Model (enum: {'None', 'MA(1)', 'AR(1)', 'AR(2)'})

Local Transient Properties

Property	Description
Model	Name of transient model (enum: { 'fuelPuddle' })
AlternativeModels	List of registered transient models (read-only)
Transform	Transform function (char) or empty (' ')
TransformBothSides	Transform both sides (Boolean)
CovarianceModel	Covariance Model (enum: { 'None', 'Power', 'Exponential', 'Mixed' })
CorrelationModel	Correlation Model (enum: { 'None', 'MA(1)', 'AR(1)', 'AR(2)' })

Local Multiple Models Properties

Property	Description
ModelCandidates	List of candidate models (cell)
SelectionStatistic	Selection statistic for automatic model selection (char). See below for input names and descriptions. The list of valid statistics is the summary statistics in common with all model candidates (e.g., if an interpolating RBF is one of the candidates, only RMSE will be available).
AutomaticInputRanges	Use data range as model input ranges (Boolean)
Transform	Transform function (char) or empty (' ')

Model Type	List of SelectionStatistic Inputs
Polynomial,Hybrid Spline, RBF, Hybrid RBF	'PRESS RMSE', 'RMSE', 'GCV', 'Weighted PRESS', '-2logL', 'AIC', 'AICc', 'BIC', 'R^2', 'R^2 adj', 'PRESS R^2', 'DW', 'Cp', 'cond(J)'
Neural Network	'RMSE', 'R^2', 'R^2 adj', '-2logL', 'AIC', 'AICc', 'BIC'
Free Knot Spline	'PRESS RMSE', 'RMSE', 'GCV', 'Weighted PRESS', '-2logL', 'AIC', 'AICc', 'BIC', 'R^2', 'R^2 adj', 'PRESS R^2', 'DW', 'Cp'
Interpolating RBF	'RMSE'

SelectionStatistic Input Argument	Description	
'PRESS RMSE'	Predicted Standard Error	'sqrt(PRESS/N)'
'RMSE'	Root Mean Square Error	'sqrt(SSE/(N-p))'

SelectionStatistic Input Argument	Description	
'GCV'	Generalized Cross-validation Variance	'N*SSE/(N-p)^2'
'Weighted PRESS'	Weighted Predicted Standard Error	'sqrt(PRESS/(N-p-1))'
'-2logL'	-2 * log likelihood	'N*log(SSE/N)'
'AIC'	Akaike Information Criteria	'-2logL + 2*(p+1)'
'AICc'	Small Sample Akaike Information Criteria	'-2logL + 2(p+1)*N/(N-p)'
'BIC'	Bayesian Information Criteria	'-2logL + 2*log(N)*(p+1)'
'R^2'	R^2	'1 - SSE/SST'
'R^2 adj'	Adjusted R^2	'1 - SSE/SST*(N-1)/(N-p)'
'PRESS R^2'	PRESS R^2	'1 - PRESS/SST'
'DW'	Durbin-Watson Statistic	'sum((e_i-e_{i+1})^2)/sum(e_i^2)'
'Cp'	Mallow's Statistic	'SSE/(SSEmax/(N-pmax)) - N + 2*p'
'cond(J)'	Condition of Regression Matrix	'cond(J)'

Local Average Fit Properties

Property	Description
Model	[1x1 mbcmodel.linearmodel]
Transform	Transform function (char) or empty ('')

Examples

To create a local model object, create a model specifying any model Type that begins with the word "local", e.g.,

```
L = mbcmodel.CreateModel('Local Polynomial',2);
```

To show properties, at the command line enter:

```
P = L.Properties
```

```
P =
```

```
Local Polynomial Properties
    Order: [3 3]
    InteractionOrder: 3
    TransformInputRange: 1
    ParameterNames: {10x1 cell}
    StepwiseStatus: {10x1 cell}
    Transform: ''
    CovarianceModel: 'None'
    CorrelationModel: 'None'
```

To set the Order property to a quadratic, enter:

```
>> P.Order = [2,2]

P =
Local Polynomial Properties
      Order: [2 2]
InteractionOrder: 2
TransformInputRange: 1
ParameterNames: {6x1 cell}
StepwiseStatus: {6x1 cell}
Transform: ''
CovarianceModel: 'None'
CorrelationModel: 'None'
```

To update the local model, the properties object must be reassigned to the model as follows:

```
>> L.Properties = P

L =

1 + 2*X1 + 5*X2 + 3*X1^2 + 4*X1*X2 + 6*X2^2
InputData: [0x2 double]
OutputData: [0x1 double]
Status: Being Edited
Linked to Response: not linked
```

See Also

CreateModel | Type (for models) | ResponseFeatures(Local Model)

LocalResponses

Array of local responses for response

Syntax

```
local = response.LocalResponses
```

Description

This is a property of the `mbcmodel.hierarchicalresponse` object.

It returns the local model response objects that belong to the hierarchical response R.

See “Understanding Model Structure for Scripting” for an explanation of the relationship between the different response types.

Examples

```
local = response.LocalResponses;
```

MakeHierarchicalResponse

Build two-stage model from response feature models

Syntax

```
OK = MakeHierarchicalResponse(L,MLE)
```

Description

This method of `mbcmodel.localresponse` builds a two-stage model from the response feature models and optionally runs MLE (Maximum Likelihood Estimation). If there are more response features than the number of parameters in the local model, the subset of response features that leads to the best hierarchical response is chosen. The best hierarchical response is chosen using PRESS RMSE (root mean square prediction error — see “PRESS statistic”) if all the response feature models are linear. Otherwise, the best hierarchical response is chosen using Two-stage RMSE.

This performs a similar function to `ChooseAsBest` for response models. You can call `MakeHierarchicalResponse` directly or indirectly by calling `CreateAlternativeModels` for a local model. If you call `CreateAlternativeModels` for a local model, `MakeHierarchicalResponse` is called automatically.

If the local and response models are not ready to calculate a two-stage model, an error is generated. This situation can occur if you have created alternative models and not chosen the best. A sufficient number of response features models to calculate the two-stage model must be selected.

L is the local model object.

MLE can be true or false. If true, MLE will be calculated.

Examples

```
OK = MakeHierarchicalResponse(L, true)
```

See Also

`ChooseAsBest`

Introduced before R2006a

MatchInputs

Match design constraint inputs

Syntax

```
C = MatchInputs(C,DesignInputs)
C = MatchInputs(C,DesignInputs,mapping)
```

Description

MatchInputs is a method of `mbcdoe.designconstraint`. Use it to match inputs for constraints from different sources.

`C = MatchInputs(C,DesignInputs)` matches DesignInputs and inputs in C.

`C = MatchInputs(C,DesignInputs,mapping)` matches inputs where mapping defines the relationship between the inputs in C, and DesignInputs.

Examples

A design constraint does not have required inputs EXH_RET and INT_ADV. Use MatchInputs to match the constraint inputs to the design inputs as follows:

```
c = BoundaryModel(p.Testplans,'all')
c =
Star(N-3.5e+003,L-0.54)

originalInputs=c.Inputs
originalInputs =
    SPEED (N) [rpm] [500,6000]
    LOAD (L) [%] [0.06,0.95]

designInputs = Design.Inputs
designInputs =
    SPEED (N) [rpm] [500,6000]
    LOAD (L) [%] [0.06,0.95]
    EXH_RET (ECP) [DegCrank] [-5,50]
    INT_ADV (ICP) [DegCrank] [-5,50]

c2=MatchInputs(c,designInputs,[1 2]);
newInputs=c2.Inputs
newInputs =
    SPEED (N) [rpm] [500,6000]
    LOAD (L) [%] [0.06,0.95]
    EXH_RET (ECP) [DegCrank] [-5,50]
    INT_ADV (ICP) [DegCrank] [-5,50]
```

See Also

CreateConstraint

Introduced in R2008a

Maximin

Maximum of minimum of distance between design points

Syntax

```
s = Maximin(D)
```

Description

Maximin is a method of `mbcdoe.design`.

`s = Maximin(D)` returns the maximum of the minimum distance between design points. Maximin is defined over the unconstrained design and is only available for space-filling design types.

See Also

Minimax

Introduced in R2008a

mbcboundary.AbstractBoundary

Base boundary model class

Description

Do not use this class directly because the `mbcboundary.AbstractBoundary` class is the base class for all boundary model classes in the Model-Based Calibration Toolbox software.

The following subclasses inherit all the properties and methods of the `mbcboundary.AbstractBoundary` class:

- `mbcboundary.Model`
- `mbcboundary.Boolean`
- `mbcboundary.PointByPoint`
- `mbcboundary.TwoStage`

Properties of `mbcboundary.AbstractBoundary`

<code>FitAlgorithm</code>	Fit algorithm for model or boundary model
<code>Fitted</code>	Indicate whether boundary model has been fitted
<code>Inputs</code>	Inputs for test plan, model, boundary model, design, or constraint
<code>Name</code>	Name of object
<code>NumInputs</code>	Number of model, boundary model, or design object inputs
<code>Type (for boundary models)</code>	Boundary model type

Methods of `mbcboundary.AbstractBoundary`

<code>CreateBoundary</code>	Create boundary model
<code>designconstraint</code>	Convert boundary model to design constraint
<code>Evaluate</code>	Evaluate model, boundary model, or design constraint
<code>getAlternativeTypes</code>	Alternative model or design types

Introduced in R2009b

mbcboundary.Boolean

Boolean boundary model class

Description

You can create Boolean boundary models, which are useful as design constraints, in two ways. You can either use logical operators (&,|,~) on other boundary models, or you can include more than one boundary model in the best boundary model for a boundary tree. If you combine boundary models using logical operators you cannot add the resulting Boolean boundary model to a boundary tree.

When working in projects, you can combine boundary models by including them `InBest`. For example, you can use subsets of input factors to build boundary models (see `ActiveFactors`). You can then combine the subset boundary models for the most accurate boundary. This approach can provide more effective results than including all inputs. If the `BestModel` property of the boundary tree includes more than one boundary model, then the boundary model is an `mbcboundary.Boolean` object.

This class is a subclass of `mbcboundary.AbstractBoundary`.

Properties of `mbcboundary.Boolean`

<code>FitAlgorithm</code>	Fit algorithm for model or boundary model
<code>Fitted</code>	Indicate whether boundary model has been fitted
<code>Inputs</code>	Inputs for test plan, model, boundary model, design, or constraint
<code>Name</code>	Name of object
<code>NumInputs</code>	Number of model, boundary model, or design object inputs
<code>Type (for boundary models)</code>	Boundary model type

Methods of `mbcboundary.Boolean`

<code>CreateBoundary</code>	Create boundary model
<code>designconstraint</code>	Convert boundary model to design constraint
<code>Evaluate</code>	Evaluate model, boundary model, or design constraint
<code>getAlternativeTypes</code>	Alternative model or design types

Introduced in R2009b

mbcboundary.Model

Boundary model class

Description

The `mbcboundary.Model` class represents the basic boundary model types in the Model-Based Calibration Toolbox software.

You can fit boundary models in `mbcmodel` projects using the boundary tree class `mbcboundary.Tree`, or you can fit boundary models directly to data.

You can combine boundary models using the logical operators `&`, `|` and `~`.

This class is a subclass of `mbcboundary.AbstractBoundary`.

Properties of `mbcboundary.Model`

<code>ActiveInputs</code>	Active boundary model inputs
<code>FitAlgorithm</code>	Fit algorithm for model or boundary model
<code>Fitted</code>	Indicate whether boundary model has been fitted
<code>Inputs</code>	Inputs for test plan, model, boundary model, design, or constraint
<code>Name</code>	Name of object
<code>NumInputs</code>	Number of model, boundary model, or design object inputs
<code>Type (for boundary models)</code>	Boundary model type

Methods of `mbcboundary.Model`

<code>CreateBoundary</code>	Create boundary model
<code>designconstraint</code>	Convert boundary model to design constraint
<code>Evaluate</code>	Evaluate model, boundary model, or design constraint
<code>fit</code>	Fit model or boundary model to new or existing data, and provide summary statistics
<code>getAlternativeTypes</code>	Alternative model or design types

Introduced in R2009b

mbcboundary.PointByPoint

Point-by-point boundary model class

Description

You can only create and fit point-by-point boundary models in the local boundary tree in two ways. You can use either a two-stage test plan or an existing boundary of type, either 'Point-by-point' or 'Two-stage'. You cannot create or fit these types of boundary models outside a project. Fit them by adding to the boundary model to the boundary tree.

A separate boundary model is fitted to each operating point. Point-by-point boundary models are only valid at the observed operating points.

This class is a subclass of `mbcboundary.AbstractBoundary`.

Properties of `mbcboundary.PointByPoint`

FitAlgorithm	Fit algorithm for model or boundary model
Fitted	Indicate whether boundary model has been fitted
Inputs	Inputs for test plan, model, boundary model, design, or constraint
LocalBoundaries	Array of local boundary models for each operating point
LocalModel	Definition of local boundary model
Name	Name of object
NumInputs	Number of model, boundary model, or design object inputs
OperatingPoints	Model operating point sites
Type (for boundary models)	Boundary model type

Methods of `mbcboundary.PointByPoint`

CreateBoundary	Create boundary model
designconstraint	Convert boundary model to design constraint
Evaluate	Evaluate model, boundary model, or design constraint
getAlternativeTypes	Alternative model or design types

Introduced in R2009b

mbcboundary.Tree

Boundary tree class

Description

The boundary Tree is a container for all the boundary models you create. You access the boundary tree from the Boundary property of `mbcmodel.testplan`. The root of the boundary tree for a one-stage test plan is an `mbcboundary.Tree` object. The root of the boundary tree for a two-stage test plan is a `mbcboundary.TwoStageTree`, and this object has `mbcboundary.Tree` objects in its Local, Global and Response properties.

Use the Models and BestModel properties of the boundary Tree to access your boundary models.

Properties of `mbcboundary.Tree`

BestModel	Combined best boundary models
Data	Array of data objects in project, boundary tree, or test plan
InBest	Boundary models selected as best
Models	Array of boundary models
TestPlan	Test plan containing boundary tree

Methods of `mbcboundary.Tree`

Add	Add boundary model to tree and fit to test plan data
CreateBoundary	Create boundary model
Remove	Remove project, test plan, model, or boundary model
Update	Update boundary model in tree and fit to test plan data

Introduced in R2009b

mbcboundary.TwoStage

Two-stage boundary model class

Description

You can only create and fit two-stage boundary models in the local boundary tree in two ways. You can use a two-stage test plan or an existing boundary of type, either 'Point-by-point' or 'Two-stage'. You cannot create or fit these types of boundary models outside a project. Fit them by adding the boundary model to the boundary tree.

Local boundary model parameters are fitted using interpolating RBFs for global inputs. Two-stage boundary models are valid at any operating point.

This class is a subclass of `mbcboundary.AbstractBoundary`.

Properties of `mbcboundary.TwoStage`

FitAlgorithm	Fit algorithm for model or boundary model
Fitted	Indicate whether boundary model has been fitted
GlobalModel	Interpolating global boundary model definition
Inputs	Inputs for test plan, model, boundary model, design, or constraint
LocalModel	Definition of local boundary model
Name	Name of object
NumInputs	Number of model, boundary model, or design object inputs
Type (for boundary models)	Boundary model type

Methods of `mbcboundary.TwoStage`

CreateBoundary	Create boundary model
designconstraint	Convert boundary model to design constraint
Evaluate	Evaluate model, boundary model, or design constraint
getAlternativeTypes	Alternative model or design types
getLocalBoundary	Local boundary model for operating point

Introduced in R2009b

mbcboundary.TwoStageTree

Root boundary tree class in two-stage test plans

Description

You access the boundary tree from the `Boundary` property of `mbcmodel.testplan`. The root of the boundary tree for two-stage test plans contains boundary trees (`mbcboundary.Tree` objects) for local, global and response boundary models in the `Local`, `Global` and `Response` properties respectively.

Details of properties:

- `Local` — Local boundary model tree (read only).

Point-by-point and two-stage boundary models are fitted in the local boundary model tree. These boundary models fit local boundary models for each operating point and combine into a single boundary model that includes the global inputs.

- `Global` — Global boundary model tree (read only).

Boundary models in the global model boundary tree are fitted with one point per test (the average value of the global variables for that test).

- `Response` — Response boundary model tree (read only).

Boundary models in the response model boundary tree are fitted with all local and global input data for the test plan.

- `BestModel` — Best boundary model (local, global, and response) (read only).

`BestModel` is the boundary model combining the best local, global, and response boundary models. You can select which boundary models to include in the best model with `InBest`. If the best boundary model includes more than one boundary model, that boundary model is an `mbcboundary.Boolean` object.

- `InBest` — Logical array indicating which boundary models you selected as best.

You can combine local, global, and response boundary models into a single boundary model for the test plan. The logical array specifies whether to include, in order, the best local, global, and response boundary models, in the best boundary model for the test plan. The `BestModel` property gives the best boundary model for the test plan.

- `TestPlan` — Test plan object that contains this boundary tree (read only).

Properties of `mbcboundary.TwoStageTree`

<code>BestModel</code>	Combined best boundary models
<code>Global</code>	Global boundary model tree
<code>InBest</code>	Boundary models selected as best
<code>Local</code>	Local boundary model tree
<code>Response</code>	Response for model object
<code>TestPlan</code>	Test plan containing boundary tree

See Also

Introduced in R2009b

mbcPointByPointModel

Class for evaluating point-by-point models and calculating PEV

Description

If you convert an `mbcmodel.localresponse` object using `Export` and you have not created a two-stage model (hierarchical response object), then the output is an `mbcPointByPointModel` object. Point-by-point models are created from a collection of local models for different operating points. `mbcPointByPointModel` objects share all the same methods as `xregstatsmodel` except `dferror`. See `xregstatsmodel`.

Introduced in R2010a

Merge

Merge designs

Syntax

`D = Merge(D1,D2,...)`

Description

Merge is a method of `mbcdoe.design`.

`D = Merge(D1,D2,...)` merges the specified designs `D1`, `D2`, etc. into a single design `D`. The resulting design is a custom design `Style`.

See Also

`Style` | `Augment`

Introduced in R2008a

Minimax

Minimum of maximum distance between design points

Syntax

```
s = Minimax(D)
```

Description

Minimax is a method of `mbcdoe.design`.

`s = Minimax(D)` returns the minimum of the maximum distance between design points. Minimax is defined over the unconstrained design and is only available for space-filling designs.

See Also

Maximin

Introduced in R2008a

Model (for designs)

Model for design

Syntax

```
D.Model = NewModel
```

Description

Model is a property of `mbcdoe.design`.

`D.Model = NewModel` changes the model for the design to `NewModel`.

The number of inputs cannot be changed. Many designs have `Limits` properties in addition to model input ranges.

Setting this property changes optimal designs to `custom` if the new model does not support optimal designs.

See Also

Inputs

Introduced in R2008a

Model Object

Model object within response object

Syntax

```
M = response.Model
```

Description

This is a property of all `mbcmodel.response` objects.

Each response contains a model object (`mbcmodel.model`) that can be extracted and manipulated independently of the project.

Extract a model object from any response object (see `Response`), and then:

- Fit to new data (`fit`).
- Change model type, properties, and fit algorithm settings (`ModelSetup`, `Type (for models)`; `Properties (for models)`, `CreateAlgorithm`).
- Create a copy of the model with the same inputs (`CreateModel`).
- Include and exclude terms to improve the model (`StepwiseRegression`).
- Examine coefficient values, predicted values, and regression matrices (`ParameterStatistics`; `PredictedValue`; `Jacobian`).
- If you change the model you need to use `UpdateResponse` to replace the new model back into the response object in the project. When you use `UpdateResponse` the new model is fitted to the response data.

Examples

```
M = response.Model;
```

ModelForTest

Model for specified test

Syntax

```
model = ModelForTest(L,TestNo);
```

Description

This is a method of `mbcmodel.localresponse`.

`model = ModelForTest(L,TestNo);` gets the model for test `TestNo`.

Examples

To get the model for test 22, enter:

```
model = ModelForTest(L,22);
```

Introduced in R2007b

modelinput

Create modelinput object

Syntax

```
Inputs = mbcmodel.modelinput('Property1',value1,'Property2',value2,...);
Inputs = mbcmodel.modelinput(NUMINPUTS);
Inputs = mbcmodel.modelinput(INPUTCELLARRAY);
```

Description

This is the constructor for the `mbcmodel.modelinput` object.

`Inputs = mbcmodel.modelinput('Property1',value1,'Property2',value2,...);`
creates the `mbcmodel.modelinput` object.

You can set the properties shown in the following table.

Property	Description
Range	[min,max]
NonlinearTransform	{'', '1./x', 'sqrt(x)', 'log10(x)', 'x.^2', 'log(x)'} Character vector. Signal name from dataset. Inputs for a test plan must be set before selecting data.
Name	Character vector. Signal name from dataset. Inputs for a test plan must be set before selecting data.
Symbol	Character vector. Short name for plot labels and for use in CAGE.
Units	Character vector. Units are overwritten from the dataset units when a data is selected.

Specify “property, value” pairs as follows:

```
Inputs = mbcmodel.modelinput('Symbol',{'A','B'},...
    'Range',[0 100],[-20 20]);
```

Scalar expansion of properties is supported, e.g.,

```
Inputs = mbcmodel.modelinput('Symbol',{'A','B'},...
    'Range',[0 100]);
```

`Inputs = mbcmodel.modelinput(NUMINPUTS);` creates the `mbcmodel.modelinput` object with the specified number inputs.

`NUMINPUTS` is the number of inputs. Symbols are automatically set to `'X1'`, `'X2'`, ..., `'Xn'`. The default range is `[-1,1]`. For example:

```
Inputs = mbcmodel.modelinput(2);
```

`Inputs = mbcmodel.modelinput(INPUTCELLARRAY);` creates the `mbcmodel.modelinput` object with `INPUTCELLARRAY` inputs.

`INPUTCELLARRAY` is a cell array with one row per input and 5 columns to specify factor names, symbols, ranges and nonlinear transforms as follows.

The columns of `INPUTCELLARRAY` must be:

- 1 Factor symbol (character vector)
- 2 Minimum (double)
- 3 Maximum (double)
- 4 Transform (character vector) — empty for none
- 5 Signal name

These columns are the same as the columns in the Model Factor Setup dialog box, which can be launched from the test plan in the model browser.

Examples

To create a `modelinput` object with 2 inputs, enter:

```
Inputs = mbcmodel.modelinput(2);
```

To create a `modelinput` object and define symbols and ranges, enter:

```
Inputs = mbcmodel.modelinput('Symbol',{'A','B'},...  
'Range',{[0 100],[-20 20]});
```

```
Inputs = mbcmodel.modelinput('Symbol',{'A','B'},...  
'Range',[0 100]);
```

To create a `modelinput` object and define inputs with a cell array, enter:

```
Inputs = mbcmodel.modelinput( {...  
'N', 800, 5000, '', 'ENGSPPEED'  
'L', 0.1, 1, '', 'LOAD'  
'EXH', -5, 50, '', 'EXHCAM'  
'INT', -5, 50, '', 'INTCAM'} );
```

See Also

[CreateModel](#) | [CreateTestplan](#)

Introduced in R2007b

Models

Array of boundary models

Syntax

`Models(T)`

Description

This is a property of `mbcboundary.Tree`.

`Models(T)` returns a cell array of boundary models (read only).

Introduced in R2009b

ModelSetup

Open Model Setup dialog box where you can alter model type

Syntax

```
[newModel, OK] = ModelSetup(oldModel)
```

Description

This is a method of `mbcmodel.model` objects.

This method opens the **Model Setup** dialog box where you can choose new model types and settings. If you click **Cancel** to dismiss the dialog, `OK = false` and `newModel = oldModel`. If you click **OK** to close the dialog box, then `OK = true` and `newModel` is your new chosen model setup. Data and response remain the same as `oldModel`. The new model is refitted when you click OK.

Call `UpdateResponse` to put the new model type back into the response.

Examples

```
[RBF, OK] = ModelSetup(Cubic);
```

See Also

`UpdateResponse` | `fit`

Introduced in R2006a

Modified

Boolean signaling whether project has been modified

Syntax

```
Name = P.Modified
```

Description

This is a property of `mbcmodel.project`.

Examples

```
Name = Project.Modified;
```

MultipleVIF

Multiple VIF matrix for linear model parameters

Syntax

```
VIF = MultipleVIF(LINEARMODEL)
```

Description

This is a method of `mbcmodel.linearmodel`.

`VIF = MultipleVIF(LINEARMODEL)` calculates the multiple Variance Inflation Factor (VIF) matrix for the linear model parameters.

Examples

```
VIF = MultipleVIF(knot_model)
```

See Also

`ParameterStatistics`

Introduced in R2007a

Name

Name of object

Syntax

```
name = A.Name
```

Description

This is a property of project, data, test plan, input, model, fitalgorithm, design, design constraint, and boundary model objects.

A can be any test plan (T), data (D), project (P) model (L, R, HR), fitalgorithm (F), design (D), design constraint (C) or boundary model (B) object.

You can change the names of these objects as follows:

```
A.Name = newName
```

For response (output or Y data) signal names, see [ResponseSignalName](#).

For `mbcmodel.model.Name`, the `Name` property refers to the model output name. The toolbox sets this property to the data signal name when the response is created or if you assign a model to a response. You cannot set this property when a response is attached to the model.

For model parameter names, see [Names](#).

For testplan and response object input names, see [InputSignalNames](#), and for data objects, see `mbcmodel.data`.

Names of boundary models are read only and provide a description of the boundary model type and active inputs.

Examples

```
ResponseFeatureName = thisRF.Name;
```

See Also

[Names](#) | [InputSignalNames](#) | [ResponseSignalName](#) | `mbcmodel.data`

Names

Model parameter names

Syntax

```
N = params.Names
```

Description

This is a property of `mbcmodel.modelparameters`. It returns the names of all the parameters in the model. These are read-only.

Examples

```
N = paramsknot.Names
N =
'1'
'N'
'N^2'
'N*L'
'N*A'
'L'
'L^2'
'L*A'
'A'
'A^2';
```

See Also

[NumberOfParameters](#) | [Values](#) | [Name](#)

New

Create new project file

Syntax

```
P = New(P)
```

Description

This is a method of `mbcmodel.project`. Use this to modify a project object to make a new project from scratch. Note the current project gets removed from memory when you open a new one.

P is the new project object.

Examples

```
New(P);
```

See Also

Load

Introduced before R2006a

NumInputs

Number of model, boundary model, or design object inputs

Syntax

```
N = model.NumInputs
```

Description

This is a property of

- `mbcmodel.model` and `mbcmodel.modelproperties`
- The design objects `mbcdoe.design`, `mbcdoe.generator`, `mbcdoe.candidateset`, and `mbcdoe.designconstraint`
- The boundary model object `mbcboundary.AbstractBoundary` and all its subclasses: `mbcboundary.Model`, `mbcboundary.Boolean`, `mbcboundary.PointByPoint` and `mbcboundary.TwoStage`. You set the number of boundary model inputs when you create the boundary model.

It returns the number of inputs to the model, boundary model, or design object.

Examples

```
N = knot.NumInputs;
```

NumberOfParameters

Number of included model parameters

Syntax

```
N = knotparams.NumberOfParameters
```

Description

This is a read-only property of `mbcmodel.linearmodelparameters`, for linear models only.

The number returned is the number of parameters currently in the model (you can remove some parameters by using `StepwiseRegression`). To see which parameters are currently in the model, use `StepwiseSelection`. Only parameters listed as 'in' are currently included.

To see the total possible number of parameters in a linear model, use `SizeOfParameterSet`.

Use `Names` and `Values` to get the parameter names and values.

Examples

```
N = knotparams.NumberOfParameters;
```

See Also

`SizeOfParameterSet` | `StepwiseSelection` | `StepwiseRegression` | `Names` | `Values`

NumberOfPoints

Number of design points

Syntax

D.NumberOfPoints

Description

NumberOfPoints is a read only property of `mbcdoe.design` (constrained number of points).

D.NumberOfPoints is the number of points in the design after applying the constraints.

You specify the number of points for a design using the generator object. The `NumberOfPoints` property of `mbcdoe.generator` is the number of points before any constraints are applied. You cannot specify the number of points for all design types (e.g., it is not allowed for Central Composite, Box Behnken). To see which design types have an editable `NumberOfPoints` property, see the tables in `Type` (for designs and generators).

See Also

`Type` (for designs and generators)

NumberOfTests

Total number of tests being used in model

Syntax

```
numtests = A.NumberOfTests
```

Description

This is a property of all model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`, and data objects `mbcmodel.data`. 'A' can be any model or data object.

Examples

```
numTests = TQ_response.NumberOfTests;
```

See Also

`DefineTestGroups` | `mbcmodel.data`

OperatingPoints

Model operating point sites

Syntax

`OperatingPoints(B)`

Description

This is a property of `mbcboundary.PointByPoint`.

`OperatingPoints(B)` returns the operating point sites for models (read only).

Introduced in R2009b

OptimalCriteria

Optimal design criteria (V, D, A, G)

Syntax

```
s = OptimalCriteria(D)
s = OptimalCriteria(D, Criteria)
```

Description

`OptimalCriteria` is a method of `mbcdoe.design`. `OptimalCriteria` can only be used for optimal designs.

`s = OptimalCriteria(D)` returns an array with the values of optimal criteria [V,D,A,G].

`s = OptimalCriteria(D, Criteria)` returns the specified optimal criteria. `Criteria` must be one of V,D, A, or G.

Introduced in R2008a

OutlierIndices

Indices of DoubleInputData marked as outliers

Syntax

```
indices = OutlierIndices(R)
```

Description

This is a method of all model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`.

Examples

```
ind = OutlierIndices(R);  
bad = OutlierIndices(thisRF);
```

See Also

`DoubleInputData`

Introduced before R2006a

OutlierIndicesForTest

Indices marked as outliers for test

Syntax

```
indices = OutlierIndicesForTest(R, TestNumber)
```

Description

This is a method of the local model object, `mbcmodel.localresponse`.

This shows the current records discarded as outliers.

You can use ':' to use all tests.

Examples

```
ind = OutlierIndicesForTest(R, ':');  
bad = OutlierIndicesForTest(local, tn);
```

See Also

[OutlierIndices](#)

Introduced before R2006a

OutputData

Output (or response) data for model

Syntax

```
D = M.OutputData
```

Description

This is a property of `mbcmodel.model`.

It returns an array of the response data currently in the model.

Examples

```
D = knot.OutputData;
```

See Also

`InputData`

Parameters

Model parameters

Syntax

```
P = model.Parameters
```

Description

This is a property of `mbcmodel.model`, that contains an object `mbcmodel.model.parameters`. This object contains a number of read-only parameters that describe the model.

All models have these properties:

- `SizeOfParameterSet`
- `Names`
- `Values`

Linear models also have these properties:

- `StepwiseStatus`
- `NumberOfParameters`
- `StepwiseSelection`

Radial Basis Function (RBF) models have all the above properties and these additional properties:

- `Centers`
- `Widths`

Examples

```
P = model.Parameters;
```

See Also

`SizeOfParameterSet` | `Names` | `Values` | `StepwiseStatus` | `NumberOfParameters` | `StepwiseSelection` | `Centers` | `Widths`

ParameterStatistics

Calculate parameter statistics for linear model

Syntax

```
values = ParameterStatistics(linearmodel, optional statType)
```

Description

This is a method of `mbcmodel.model`, for linear models only. This calculates parameter statistics for the linear model. If you don't specify `statType`, then a structure with all valid types is output. `statType` may be a character vector specifying a particular statistic or a cell array of character vectors specifying a number of statistics to output. If `statType` is a character vector, then `values` is an array of doubles. If `statType` is a cell array of character vectors, then `values` is a cell array of array of doubles.

The valid types are:

'Alias'

'Covariance'

'Correlation'

'VIFsingle'

'VIFmultiple'

'VIFpartial'

'Stepwise'

These types (except Stepwise) appear in the Design Evaluation tool; see the documentation for this tool for details of these matrices.

The Stepwise field contains the values found in the Stepwise table. In this array (and in the Stepwise GUI) you can see for each parameter in the model: the value of the coefficient, the standard error of the coefficient, the t value and Next PRESS (the value of PRESS if the status of this term is changed at the next iteration). See the documentation for the Stepwise table. You can also see these Stepwise values when you use `StepwiseRegression`.

Examples

```
values = ParameterStatistics(knot)
values =
    Alias: [7x3 double]
    Covariance: [7x7 double]
    Correlation: [7x7 double]
    VIFsingle: [5x5 double]
    VIFmultiple: [7x1 double]
    VIFpartial: [5x5 double]
```

```
Stepwise: [10x4 double]
values.Stepwise
ans =
 1.0e+003 *
    0.0190    0.0079    0.0210    NaN
    0.0000    0.0000    0.0210    1.9801
    0.0000    0.0000    0.0200    0.2984
   -0.0000    0.0000    0.0200    0.2768
    0.0000    0.0000    0.0200    0.2890
   -0.0526    0.0367    0.0210    0.2679
    0.0911    0.0279    0.0210    0.3837
   -0.0041    0.0024    0.0210    0.2728
   -0.0178    0.0095    0.0200    0.2460
    0.0001    0.0000    0.0210    0.3246
```

See Also

StepwiseRegression

Introduced before R2006a

PartialVIF

Partial VIF matrix for linear model parameters

Syntax

```
STATS = PartialVIF(LINEARMODEL)
```

Description

This is a method of `mbcmodel.linearmodel`.

`STATS = PartialVIF(LINEARMODEL)` calculates the partial Variance Inflation Factor (VIF) matrix for the linear model parameters.

Examples

```
VIF = PartialVIF(knot_model)
```

See Also

`ParameterStatistics`

Introduced in R2007a

PEV

Predicted error variance of model at specified inputs

Syntax

```
pev = PEV(R, X)
```

Description

This is a method of the hierarchical, local response, response, and model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.response`, and `mbcmodel.model`.

R is the model object, and X is the array of input values where you want to evaluate the PEV of the model. For a local response, the predicted value uses the hierarchical model.

Note that for an `mbcmodel.model` and `mbcmodel.response` objects only, the X is optional. That is, the syntax is:

```
PEV = PEV(model, optional X)
```

This calculates the Predicated Error Variance at X. If X is not specified, then X is the existing input values. An array is returned of PEV values evaluated at each data point.

Examples

```
pev = PEV(R, X);
```

See Also

`PEVForTest`

Introduced before R2006a

PEVForTest

Local model predicted error variance for test

Syntax

```
pev = PEVforTest(L, TestNumber, X)
```

Description

This is a method of the local model object, `mbcmodel.localresponse`.

L is the local model object.

TestNumber is the test for which you want to evaluate the model PEV.

X is the array of inputs where you want to evaluate the PEV of the model.

Examples

```
pev = PEVforTest(L, TestNumber, X);
```

See Also

PEV

Introduced before R2006a

Points

Matrix of design points

Syntax

```
designPoints = D.Points
```

Description

Points is a property of `mbcdoe.design`.

`designPoints = D.Points` returns the matrix of design points.

You can perform any valid MATLAB operation on this matrix. The number of columns of the points matrix must be the same as the number of inputs when setting `Points`. If you make an assignment to the `Points`, the design type changes to `Custom`. Points are only updated in the underlying design if they have changed.

See Also

[FixPoints](#) | [PointTypes](#) | [RemovePoints](#) | [NumberOfPoints](#)

PointTypes

Fixed and free point status

Syntax

D.PointTypes

Description

PointType is a property of `mbcdoe.design`. Each point has a type of `free`, `fixed` or `data`.

You can specify `fixed` points. `free` is the default. If a point has been matched to data then it is of type `data`.

D.PointTypes returns a cell array of PointTypes, one for each design point. You cannot change a PointType of `data` to something else as the `data` is set by the test plan when matching the design to `data`.

You can use the method `FixPoints` to fix all the points in a design.

See Also

`FixPoints` | `Points` | `RemovePoints`

PredictedValue

Predicted value of model at specified inputs

Syntax

```
y = PredictedValue(R,X)
y = PredictedValue(R)
```

Description

This is a method of the hierarchical, response, local response, and model objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.response`, `mbcmodel.localresponse`, and `mbcmodel.model`.

`y = PredictedValue(R,X)` evaluates the model at the specified inputs, where `R` is the model object, and `X` is the array of inputs where you want to evaluate the output of the model.

Note that for an `mbcmodel.model`, `mbcmodel.localresponse` and `mbcmodel.response` objects, the `X` is optional. If `X` is not specified then the `X` is the existing input values. That is, the syntax is:

```
y = PredictedValue(model, optional X)
```

`y = PredictedValue(R)` calculates the predicted value at the fit data. An array is returned of predicted values evaluated at each data point. For local models, this is equivalent to `y = PredictedValue(L, L.InputData)`.

Note that you cannot evaluate model output for a local response or hierarchical response until you have constructed it using `MakeHierarchicalResponse` (or `CreateAlternativeModels`). If you have created alternative response feature models then a best model must be selected. If you have made changes such as removing outliers since choosing a model as best, you may need to choose a new best model. For a local response, the predicted value uses the hierarchical model. If no data is specified then the data from all tests is used.

Examples

```
y = PredictedValue(R, X);
modelPred = PredictedValue(thisRF, x);
```

See Also

[PredictedValueForTest](#) | [ChooseAsBest](#) | [PEV](#) | [Evaluate](#)

Introduced before R2006a

PredictedValueForTest

Predicted local model response for test

Syntax

```
y = PredictedValueForTest(L, TestNumber, X)
```

Description

This is a method of the local model object, `mbcmodel.localresponse`.

L is a local model object.

TestNumber is the test for which you want to evaluate the model.

X is the array of inputs where you want to evaluate the output of the model.

Examples

```
y = PredictedValueForTest(L, TestNumber, X);
```

See Also

PredictedValue

Introduced before R2006a

Properties (for candidate sets)

View and edit candidate set properties

Syntax

```
properties(CS)  
CS.PropertyName = NewValue
```

Description

“Properties” is a method of `mbcdoe.candidateset`, which returns a list of properties.

`properties(CS)` lists the candidate set properties.

`CS.PropertyName = NewValue` sets the candidate set property.

The candidate set `Type` determines which properties you can set.

The following table lists the properties available for each candidate set type.

Candidate Set Properties (for Optimal Designs)

Candidate Set Type	Property	Description
All built-in: Grid/ Lattice, Grid, Lattice, Stratified Lattice, Sobol, Halton	NumberOfPoints (read-only for Grid and Grid/Lattice)	Number of points (int: [0,Inf])
	Limits	Design Limits
Grid	Levels	Selection criteria for best LHS design (cell)
	NumberPerLevel	Symmetric design (vector int: {[-Inf,Inf], NumInputs})
Lattice	Generators	Prime number generators for lattice (vector int: {[0,Inf], NumInputs})
Stratified Lattice	StratifyLevels	Number of levels for each factors (vector int: {[0,Inf], NumInputs})
Sobol Sequence	Scramble	Scramble method (enum: {'none', 'MatousekAffineOwen'})
	SkipMode	Skip mode options (enum: {'None','2^k','Custom'})
	Skip	Skip size (int: [0,Inf])
Halton Sequence	Scramble	Scrambling method for sequence (enum: {'None','RR2'})
	PrimeLeap	Leap sequence points using prime number (boolean)
	SkipZero	Skip zero point (boolean)
User-defined	NumberOfPoints	User-defined points (read-only)
	Points	User-defined points

Examples

You can use property value pairs to specify candidate set properties as part of the CreateCandidateSet command, or you can set properties individually.

To create a candidate set with type grid and specified grid levels:

```
CandidateSet = augmentedDesign.CreateCandidateSet...
('Type', 'Grid' );
CandidateSet.NumberOfLevels = [21 21 21 21];
```

See Also

CreateCandidateSet

Introduced in R2008a

Properties (for design constraints)

View and edit design constraint properties

Syntax

```
properties(C)  
C.PropertyName = NewValue
```

Description

“Properties” is a method of `mbcdoe.designconstraint`, which returns a list of properties.

`properties(C)` lists the constraint properties.

`C.PropertyName = NewValue` sets the constraint property.

The constraint `Type` determines which properties you can set. For more information, see the following table or [Type \(for design constraints\)](#).

The following table lists the properties available for each constraint type.

Constraint Properties

Constraint Type	Property	Description
Linear design constraint: 1*Input1 + 1* Input2 + 1* Input3 <= 0	A	Matrix for linear constraint (matrix: [1,NumInputs])
	b	Bound for linear constraint (double)
Ellipsoid design constraint: Ellipsoid at (Input1=0, Input2=0, Input3=0)	CenterPoint	Center of ellipse (vector: NumInputs)
	Matrix	Ellipsoid form matrix (positive semi-definite) (matrix: [NumInputs, NumInputs])
1D Table design constraint: InputY(InputX) <= InputY max	Table	Table constraint (vector)
	Breakpoints	Breakpoints for rows (vector)
	Inequality	Relational Operator (enum: { '<=' , '>=' })
	InputFactor	Column input symbol (enum: { 'InputX' , 'InputY' })
	TableFactor	Table input symbol (enum: { 'InputX' , 'InputY ' })
2D Table design constraint: InputZ(InputX,InputY) <=InputZmax	Table	: Table constraint (matrix))
	RowBreakpoints	Breakpoints for rows (vector)
	ColumnBreakpoints	Breakpoints for columns (vector)
	Inequality	Relational operator (enum: { '<=' , '>=' })
	RowFactor	Row input symbol (enum: { 'InputX' , 'InputY , 'InputZ' })
	ColumnFactor	Column input symbol (enum: { 'InputX' , 'InputY , 'InputZ' })
	TableFactor	Table input symbol (enum: { 'InputX' , 'InputY' , 'InputZ' })

Examples

You can use property value pairs to specify constraint properties as part of the CreateConstraint command, or you can set properties individually.

For examples, see CreateConstraint.

See Also

CreateConstraint

Introduced in R2008a

Properties (for design generators)

View and edit design generator properties

Syntax

```
properties(Generator)
Generator.PropertyName = NewValue
```

Description

“properties” (lower case p) is a method of `mbcdoe.generator`, which returns a list of properties.

`properties(Generator)` lists the generator properties.

`Generator.PropertyName = NewValue` sets the generator property.

The design generator object `Type` determines which properties you can set. For more information, see `Type` (for designs and generators).

The settings are applied immediately, you do not need to call `generate` on the design object.

The following tables list the properties available for each design type.

Optimal Design Properties (D-, V- and A-Optimal)

Property	Description
NumberOfPoints	Number of points (int: [0,Inf])
InitialPoints	Initial design points (Matrix)
CandidateSet	Candidate set (<code>mbcdoe.candidateset</code>)
AllowReplicates	Allow replicate points (boolean)
AugmentMethod	Methods to add points (enum: {'random', 'optimal'})
Tolerance	Tolerance (numeric: 'positive')
MaxIterations	Maximum Iterations (int: 'positive')
NumberOfPointsToAlter	Number of points to alter per iteration using the random augment method (p) (int: 'positive')
NoImprovement	Number of iterations with no improvement using the random augment method (p) (int: 'positive')

Note Optimal designs have dependencies between `NumberOfPoints`, `InitialPoints` and `CandidateSets`. When you change `NumberOfPoints`, an initial point is drawn from the existing candidate set. Setting `NumberOfPoints` updates `InitialPoints`. Likewise setting `InitialPoints` updates `NumberOfPoints`. When changing the candidate set a new initial design is drawn from the new candidate set.

Space-Filling Design Properties

Design Type	Property	Description
All space-filling design types (Lattice, Latin Hypercube Sampling, Stratified Latin Hypercube, Sobol, Halton)	NumberOfPoints	Number of points (int: [0,Inf])
	Limits	Design Limits (matrix: [NumInputs,2])
	BoundaryPercent	Limits the maximum number of boundary points as a percentage of the total number of design of experiment (DoE) points (int: 'positive')
Lattice	PrimeGenerators	Prime number generators for lattice for each input (vector int: [0,Inf])
Latin Hypercube Sampling and Stratified Latin Hypercube	SelectionCriteria	Selection criteria for best LHS design (enum: {'discrepancy', 'minimax', 'maximin', 'cdfvariance', 'cdfmaximum'})
	Symmetry	Symmetric design (boolean)
Stratified Latin Hypercube	StratifyLevels	Number of levels for each factors (vector int: {[0,Inf], NumInputs})
	StratifyValues	Stratify levels (cell)
Sobol Sequence	Scramble	Scramble method (enum: {'none', 'MatousekAffineOwen'})
	SkipMode	Skip mode options (enum: {'None', '2^k', 'Custom'})
	Skip	Skip size (int: [0,Inf])
Halton Sequence	Scramble	Scrambling method for sequence (enum: {'None', 'RR2'})
	PrimeLeap	Leap sequence points using prime number (boolean)
	SkipZero	Skip zero point (boolean)

Classical Design Properties

Design Type	Property	Description
All (Box-Behnken, Central Composite, Full Factorial, Plackett-Burman, Regular Simplex)	NumberOfPoints (read-only)	Number of points (int: [0,Inf])
	Limits	Design limits
All except Plackett-Burman	NumberOfCenterPoints	Number of center points (int: [0,Inf])
Central Composite	StarPoints	Star point position (enum: {'FaceCenteredCube', 'Spherical', 'Rotatable', 'Custom'})
	Inscribe	Inscribe points (boolean)
	Alpha	Specify 'Custom' star point location: (vector: {'positive', NumInputs}) For 'FaceCenteredCube', alpha = 1 For 'Spherical', alpha = sqrt(nf) For 'Rotatable', alpha = 2^(nf/4)
Full Factorial	Levels	Cell array of levels for each input (cell)
	NumberOfLevels	Number of levels for each input (vector int: {'positive', NumInputs })

Examples

You can use property value pairs to specify design generator properties as part of the `Generate` and `Augment` commands. You can also set properties individually. Some examples:

To create a full factorial design and specify the number of levels when generating the design:

```
design = CreateDesign( inputs, 'Type', 'Full Factorial' );
design = Generate( design, 'NumberOfLevels', [50 50] );
```

To create a latin hypercube sampling design:

```
globalDesign = TP.CreateDesign(2,...
'Vector', 'Latin Hypercube Sampling');
```

To create and generate a halton design with 50 points:

```
haltonDesign = CreateDesign( inputs, 'Type',...
'Halton Sequence', 'Name', 'Halton' );
haltonDesign = Generate( haltonDesign, 50 );
```

To explicitly specify the `NumberOfPoints` property:

```
haltonDesign = Generate( haltonDesign, 'NumberOfPoints', 50 );
```

To create and generate a halton design with specified scrambling and other properties:

```
haltonDesignWithScrambling = haltonDesign.CreateDesign...
( 'Name', 'Scrambled Halton' );
haltonDesignWithScrambling = Generate...
( haltonDesignWithScrambling,...
  'Scramble', 'RR2', 'PrimeLeap', true );
```

To generate an optimal design with specified properties:

```
OptDesign = Generate(OptDesign,...
  'Type','V-optimal',...
  'CandidateSet',C,...
  'MaxIterations',200,...
  'NoImprovement', 50,...
  'NumberOfPoints',200);
```

The previous code is equivalent to setting the properties individually and then calling Generate as follows:

```
P = OptDesign.Generator;
P.Type = 'V-optimal';
P.CandidateSet.NumberOfLevels(:)=21;
P.MaxIterations = 200;
P.NumberOfPoints = 200;
P.NoImprovement = 50;
OptDesign.Generator = P;
```

To augment a design optimally with 20 points:

```
OptDesign = Augment(OptDesign,...
  'Type','V-optimal',...
  'MaxIterations',200,...
  'NoImprovement', 50,...
  'NumberOfPoints',20);
```

See Also

CreateDesign | Generate | Augment | Properties (for candidate sets) | Properties (for design constraints)

Introduced in R2008a

Properties (for models)

View and edit model properties

Syntax

```
modelprop=M.Properties  
M.Properties.PropertyName = NewValue  
properties(M.Properties)  
f=M.Properties.properties
```

Description

“Properties” is a property of `mbcmodel.model`.

`modelprop=M.Properties` returns a `mbcmodel.modelproperties` object.

To edit a property, use the syntax `M.Properties.PropertyName = NewValue`.

“properties” is a method of `mbcmodel.fitalgorithm` and `mbcmodel.modelproperties` which returns a list of properties.

`properties(M.Properties)` lists the property names, types and allowed values.

`f=M.Properties.properties` returns the property names as a cell array.

The model Type determines which properties you can set. For more information, see [Type \(for models\)](#).

To get a `mbcmodel.modelproperties` object from a model:

```
>> M = mbcmodel.CreateModel('Polynomial', 4);  
>> disp(M)  
mbcmodel.linearmodel:Polynomial
```

```
>>modelproperties=M.Properties
```

```
modelproperties =  
Polynomial Properties  
                Order: [3 3 3 3]  
InteractionOrder: 3  
TransformInputRange: 1  
ParameterNames: {35x1 cell}  
StepwiseStatus: {35x1 cell}  
BoxCox: 1
```

To create a model and list the properties:

```
>> M = mbcmodel.CreateModel('RBF',2)
```

```
M =
```

```
    A radial basis function network using a multiquadric kernel
```

```

        with 0 centers
        and a global width of 2.
        The regularization parameter, lambda, is 0.0001.
        InputData: [0x2 double]
        OutputData: [0x1 double]
        Status: Not fitted
        Linked to Response: <not linked>

>> properties(M.Properties)
RBF Properties
    Kernel: RBF kernel (enum: {'multiquadric',...
'recmultiquadric','gaussian','thinplate','logisticrbf',...
'wendland','linearrbf','cubicrbf'})
    Continuity: Continuity for Wendland kernel...
(0,2,4,6) (int: [0,6])
    ParameterNames: List of parameter names (read-only)
    StepwiseStatus: Stepwise status {'Always','Never',...
'Step'} (cell)
    BoxCox: Box-Cox transform (power) (numeric: [-3,3])

```

The following syntax returns the properties as a cell array:

```

>> f=M.Properties.properties

f =

    'Kernel'
    'Continuity'
    'ParameterNames'
    'StepwiseStatus'
    'BoxCox'

```

Change a property as follows:

```
>>M.Properties.Kernel = 'thinplate';
```

The model changes state to 'Being Edited'. The settings are not applied until you call Fit on the model object.

The following sections list the properties available for each model type.

Gaussian Process Models — Properties

KernelFunction: Kernel function (enum: {'Exponential','ARDEXponential','SquaredExponential','ARDSquaredExponential','Matern32','ARDMatern32','Matern52','ARDMatern52','RationalQuadratic','ARDRationalQuadratic'})

BasisFunction: Explicit basis function (enum: {'None','Constant','Linear','PureQuadratic'})

Threshold: Threshold to switch to large data fitting algorithm (int: [1,Inf])

ActiveSetSize: Active set size (int: [1,Inf])

ActiveSetMethod: Large scale active set method (enum: {'SGMA','Entropy','Likelihood','Random'})

FitMethod: Large data fit method (enum: {'SD','FIC','SR'})

PredictMethod: Large data predict method (enum: {'Exact','BCD','SD','FIC','SR'})

InitializeMethod: Initialize hyperparameters method (enum: {'LOO-loss','logML','none'})

BoxCox: Box-Cox transform (power) (numeric: [-3,3])

Linear Models – Polynomial Properties

mbcmodel.linearmodel:Polynomial

Order: Polynomial order (vector int: {[0,Inf],NumInputs})

InteractionOrder: Maximum order of interaction terms (int: [0,Inf])

TransformInputRange: Transform inputs (Boolean)

ParameterNames: List of parameter names (read-only)

StepwiseStatus: Stepwise status {'Always','Never','Step'} (cell)

BoxCox: Box-Cox transform (power) (numeric: [-3,3])

Linear Models – Hybrid Spline Properties

mbcmodel.linearmodel:Hybrid Spline

Order: Spline and polynomial order (vector int: {[0,3],NumInputs})

SplineVariable: Spline variable

SplineInteraction: Order of interaction between spline and polynomial (int: [0,3])

Knots: Position of knots (vector real)

ParameterNames: List of parameter names (read-only)

StepwiseStatus: Stepwise status {'Always','Never','Step'} (cell)

BoxCox: Box-Cox transform (power) (numeric: [-3,3])

Linear Models – RBF Properties

mbcmodel.linearmodel:RBF

Kernel: RBF kernel (enum: {'multiquadric','recmultiquadric','gaussian','thinplate','logisticrbf','wendland','linearrbf','cubicrbf'})

Continuity: Continuity for Wendland kernel (0,2,4,6) (int: [0,6])

ParameterNames: List of parameter names (read-only)

StepwiseStatus: Stepwise status {'Always','Never','Step'} (cell)

BoxCox: Box-Cox transform (power) (numeric: [-3,3])

Linear Models — Polynomial-RBF Properties

mbcmodel.linearmodel:Polynomial-RBF

Order: Polynomial order (vector int: {[0,Inf],NumInputs})

InteractionOrder: Maximum order of interaction terms (int: [0,Inf])

Kernel: RBF kernel (enum:

{'multiquadric','recmultiquadric','gaussian','thinplate','logisticrbf','wendland',
'linearrbf','cubicrbf'})

Continuity: Continuity for Wendland kernel (0,2,4,6) (int: [0,6])

ParameterNames: List of parameter names (read-only)

StepwiseStatus: Stepwise status {'Always','Never','Step'} (cell)

BoxCox: Box-Cox transform (power) (numeric: [-3,3])

Linear Models — Hybrid Spline-RBF Properties

mbcmodel.linearmodel:Hybrid Spline-RBF

Order: Spline and polynomial order (vector int: {[0,3],NumInputs})

SplineVariable: Spline variable

SplineInteraction: Order of interaction between spline and polynomial (int: [0,3])

Knots: Position of knots (vector real)

Kernel: RBF kernel (enum:

{'multiquadric','recmultiquadric','gaussian','thinplate','logisticrbf','wendland',
'linearrbf','cubicrbf'})

Continuity: Continuity for Wendland kernel (0,2,4,6) (int: [0,6])

ParameterNames: List of parameter names (read-only)

StepwiseStatus: Stepwise status {'Always','Never','Step'} (cell)

BoxCox: Box-Cox transform (power) (numeric: [-3,3])

Nonlinear Models — Free Knot Spline Properties

mbcmodel.model:Free Knot Spline

Order: Spline order (int: [0,3])

NumKnots: Number of knots (int: 'Positive')

Nonlinear Models — Neural Network Properties

mbcmodel.model:Neural Network

HiddenLayers: Number of hidden layers (int: [1,2])

Neurons: Number of Neurons in each hidden layer (vector int: 'Positive')

Examples

```
>> modelprops=M.Properties
```

```
modelprops =  
Polynomial Properties  
    Order: [3 3 3 3]  
InteractionOrder: 3  
TransformInputRange: 1  
ParameterNames: {35x1 cell}  
StepwiseStatus: {35x1 cell}  
BoxCox: 1
```

```
>> M.Properties.Order = [3 2 2 3]
```

```
M =
```

```
    1 + 2*X1 + 10*X4 + 15*X2 + 18*X3 + 3*X1^2 + 6*X1*X4  
...+ 8*X1*X2 + 9*X1*X3 +  
    11*X4^2 + 13*X4*X2 + 14*X4*X3 + 16*X2^2 + 17*X2*X3  
...+ 19*X3^2 + 4*X1^3 +  
    5*X1^2*X4 + 7*X1*X4^2 + 12*X4^3  
InputData: [0x4 double]  
OutputData: [0x1 double]  
Status: Being Edited  
Linked to Response: <not linked>
```

See Also

Type (for models) | LocalModel Properties

RecordsPerTest

Number of records in each test

Syntax

```
numRecords = D.RecordsPerTest
```

Description

This is a property of data objects: `mbcmodel.data`. It returns an array, of length `NumberOfTests`, containing the number of records in each test.

Examples

```
numRecords = D.RecordsPerTest;
```

Remove

Remove project, test plan, model, or boundary model

Syntax

OK = Remove(A) removes project, test plan, or model object A.

Description

This is a method of all the nondata objects: projects, test plans, all models, and boundary trees.

A can be any project, test plan, or model object.

You cannot remove datum models if other models use them.

For boundary trees, specify which boundary model to remove: Remove(BoundaryTree, Index).

Examples

OK = Remove(R3);

Introduced before R2006a

RemoveData

Remove data from project

Syntax

P = RemoveData(P, D)

P = RemoveData(P, Index)

Description

This is a method of `mbcmodel.project`.

You can refer to the data object either by name or index.

P is the project object.

D is the data object you want to remove.

Index is the index of the data object you want to remove.

Examples

```
RemoveData(P, D);
```

See Also

CreateData | Data | CopyData

Introduced before R2006a

RemoveDesign

Remove design from test plan

Syntax

```
RemoveDesign(T,Name)  
RemoveDesign(T,Level,Name)  
RemoveDesign(T,D)  
RemoveDesign(T,Level,D)
```

Description

RemoveDesign is a method of `mbcmodel.testplan`.

RemoveDesign(T,Name) removes a design with a matching name from the test plan T.

Name can be a character vector, or a cell array of character vectors.

RemoveDesign(T,Level,Name) removes a design with a matching name from the specified level of the test plan. By default the level is the outer level (i.e., Level 1 for one-stage, Level 2 (global) for two-stage).

RemoveDesign(T,D) removes D, an array of designs to be deleted. All designs with matching names are deleted.

RemoveDesign(T,Level,D) removes D from the specified level.

See Also

AddDesign | UpdateDesign | FindDesign

Introduced in R2008a

RemoveOutliers

Remove outliers in input data by index or rule, and refit models

Syntax

```
R = RemoveOutliers(R, Selection);
```

```
R = RemoveOutliers(L, LocalSelection, GlobalSelection)
```

Description

This is a method of the local model object, `mbcmodel.localresponse` and the response feature model object `mbcmodel.response`.

All the response feature models are refitted after the local models are refitted. Outlier selection is applied to all tests.

For a response model:

- `R` is a response object.
- `Selection` specifies either a set of indices or the name of an outlier selection function, of the following form:

```
Indices = myMfile(model, data, factorName)
```

The factors are the same as defined in `DiagnosticStatistics`.

- `data` contains the factors as columns of a matrix.
- `factorNames` is a cell array of the names for each factor.

For a local model:

- `LocalSelection` is the local outlier selection indices or function.
- `GlobalSelection` is the global outlier selection indices or function.

Outlier selection functions must conform to this prototype:

```
Indices = myMfile(model, data, factorName)
```

The factors are the same as appear in the scatter plot in the Model Browser.

- `data` contains the factors as columns of a matrix.
- `factorNames` is a cell array of the names for each factor.

Examples

```
outlierind = [1 4 6 7];  
RemoveOutliers(thisRF, outlierind);
```

See Also

RemoveOutliersForTest

Introduced before R2006a

RemoveOutliersForTest

Remove outliers on test by index or rule and refit models

Syntax

```
L = RemoveOutliersForTest(LOCALRESPONSE, TESTNUMBER, LOCALSELECTION)
L = RemoveOutliersForTest(LOCALRESPONSE, TESTNUMBER, LOCALSELECTION,
doUpdate)
```

Description

This is a method of `mbcmodel.localresponse`.

`L = RemoveOutliersForTest(LOCALRESPONSE, TESTNUMBER, LOCALSELECTION)` removes outliers, refits the local model, and refits the response feature models.

`L = RemoveOutliersForTest(LOCALRESPONSE, TESTNUMBER, LOCALSELECTION, doUpdate)` removes outliers and if `doUpdate` is `true`, refits all response features after the local model is refitted.

`TESTNUMBER` is the single test number to refit.

`LOCALSELECTION` can either be a set of indices or a function name.

An outlier selection function must take the following form:

```
INDICES = MYMFILE(MODEL, DATA, FACTORNAME);
```

The factors are the same as defined in `DiagnosticStatistics`.

`DATA` contains the factors as columns of a matrix, and `FACTORNAME` is a cell array of the names for each factor.

Examples

For a local response `LOCALRESPONSE`, to remove first two data points and do not update response features:

```
RemoveOutliersForTest(LOCALRESPONSE,1,1:2,false);
```

To find list of indices of removed data points:

```
indices = OutliersForTest(LOCALRESPONSE,1);
```

To restore first data point:

```
RestoreDataForTest(LOCALRESPONSE,1,1,false);
```

To restore all data:

```
RestoreDataForTest(LOCALRESPONSE,1,':',false);
```

To update response features:

```
UpdateResponseFeatures(LOCALRESPONSE);
```

See Also

UpdateResponseFeatures | RestoreDataForTest | OutlierIndicesForTest |
RemoveOutliers

Introduced before R2006a

RemovePoints

Remove all nonfixed design points

Syntax

```
D = RemovePoints(D)
D = RemovePoints(D,PointType)
D = RemovePoints(D,indices)
```

Description

RemovePoints is a method of `mbcdoe.design`.

`D = RemovePoints(D)` removes all nonfixed points from the design.

`D = RemovePoints(D,PointType)` removes the specified type of points, where `PointType` is one of 'free', 'fixed' or 'data'.

`D = RemovePoints(D,indices)` removes the points specified by `indices`.

Examples

To remove all free points:

```
Design = RemovePoints(Design,'free');
```

See Also

FixPoints

Introduced in R2008a

Response

Response for model object

Syntax

```
R = model.Response
```

Description

Models. This is a property of `mbcmodel.model`. It returns the response the model object came from (e.g. a response object).

If you make changes to the model object (for example by changing the model type using `ModelSetup`, or using `StepwiseRegression`) you must use `UpdateResponse` to return the new model object to the response in the project.

Boundary models. This is a property of `mbcboundary.TwoStageTree`.

The `Response` property contains a response boundary model tree (read only). Boundary models in the response model boundary tree are fitted with all local and global input data for the test plan.

Examples

```
R = model.Response;
```

See Also

[UpdateResponse](#) | [ModelSetup](#)

ResponseFeatures(Local Model)

Set of response features for local model

Syntax

RFs = L.ResponseFeatures

Description

This is a property of the local model object, `mbcmodel.localmodel`.

RFs = L.ResponseFeatures returns a `mbcmodel.responsefeatures` object. L is the local model.

See “Understanding Model Structure for Scripting” in the Getting Started documentation for an explanation of the relationships between local models, local responses, and other responses.

Available properties and methods are described in the following tables.

Property	Description
EvaluationPoints	Cell array of evaluation points for the response feature set (read-only). An element of <code>EvaluationPoints</code> is empty if the response feature does not use the Evaluation point. This property is set up when the response feature is created (see the Add method).
Types	Cell array of types for response feature set (read-only). This property is set up when the response feature is created (see the Add method).
NumberOfResponseFeatures	Number of response features in set (read-only).
IsFitted	The local model has been fitted.

Method	Description
Add	<p>Add new response feature to response feature set</p> <p>RF = Add(RF,RFtype)</p> <p>RFtype is a description character vector belonging to the set of alternative response features. See <code>getAlternativeTypes</code>.</p> <p>RF = Add(RF,RFtype,EvaluationPoint)</p> <p>EvaluationPoint is a row vector with an element for each model input and is used for response features that require an input value to evaluate the response feature (e.g., function evaluation, derivatives). It is an error to specify an evaluation point for a response feature type that does not require an evaluation point.</p>

Method	Description
Remove	Remove a response feature from the response feature set <code>RF = Remove(RF, index)</code>
Select	Select a subset of response features from the response feature set <code>RF = Select(RF, indices)</code>
getDefaultSet	List of default response features <code>RF = getDefaultSet(RF)</code> Returns an <code>mbcmodel.responsefeatures</code> object with the default set of response features for the local model.
getAlternativeTypes	List of all alternative response feature types for local model <code>RFtypes = getAlternativeTypes(RF)</code> Returns a cell array of response feature type character vectors for the local model.
Evaluate	Evaluate response features <code>rfvals = Evaluate(RF);</code> Returns the values for the response features for the current local model. <code>[rfvals, stderr] = Evaluate(RF)</code> Also returns the standard errors for the response features for the current local model. The local model must be fitted before evaluating response features.
Jacobian	Jacobian matrix of response features with respect to parameters <code>J = Jacobian(RF)</code> The local model must be fitted before calculating the Jacobian matrix.
Covariance	Covariance matrix for response features <code>rfvals = Covariance(RF);</code> The local model must be fitted before calculating the covariance matrix.
Correlation	Correlation matrix for response features <code>rfvals = Correlation(RF)</code> Errors occur if model is not fitted.

Method	Description
ReconstructSets	<p>List of subsets of response features which can be used to reconstruct the local model</p> <p><code>RFlist = ReconstructSets(RF)</code></p> <p><code>RFlist</code> is a cell array of <code>mbcmodel.responsefeatures</code>. Each element of <code>RFlist</code> can be used to reconstruct the local model from response feature values.</p>

Examples

First, create a local model object:

```
L = mbcmodel.CreateModel('Local Polynomial',2)
```

```
L =
```

```

  1 + 2*X1 + 8*X2 + 3*X1^2 + 6*X1*X2 + 9*X2^2 + 4*X1^3...
+ 5*X1^2*X2 + 7*X1*X2^2 +
  10*X2^3
  InputData: [0x2 double]
  OutputData: [0x1 double]
  Status: Not fitted
  Linked to Response: not linked

```

The properties of the local model object are the same as the properties of an `mbcmodel.model` object with the additional property “ResponseFeatures”. Look at the response features property as follows:

```
>> RFs = L.ResponseFeatures
```

```
RFs =
```

```
Response features for Polynomial
```

```

'Beta_1'
'Beta_X1'
'Beta_X1^2'
'Beta_X1^3'
'Beta_X1^2*X2'
'Beta_X1*X2'
'Beta_X1*X2^2'
'Beta_X2'
'Beta_X2^2'
'Beta_X2^3'

```

```

% Set up response features
RFtypes = getAlternativeTypes(RFs);
RF = Add(RF, RFtypes{end},-10);

```

```

% assign to local model
L.ResponseFeatures = RFs;

```

ResponseFeatures(Local Response)

Array of response features for local response

Syntax

```
RFs = L.ResponseFeatures
```

Description

This is a property of the local model object, `mbcmodel.localresponse`.

L is the local response.

See “Understanding Model Structure for Scripting” in the Getting Started documentation for an explanation of the relationships between local responses and other responses.

Examples

```
RFs = Local.ResponseFeatures;
```


ResponseSignalName

Name of signal or response feature being modeled

Syntax

```
ySignal = R.ResponseSignalName
```

Description

This is a property of all response objects: `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse` and `mbcmodel.response`.

R can be a hierarchical response, local response or response.

Examples

```
yName = local.ResponseSignalName;
```

See Also

`InputSignalNames`

Responses

Array of available responses for test plan

Syntax

`R = T.Responses`

Description

This is a property of `mbcmodel.testplan`.

T is the test plan object.

See “Understanding Model Structure for Scripting” for an explanation of the relationship between test plans and responses.

Examples

`R = T.Responses;`

RestoreData

Restore removed outliers

Syntax

```
R = RestoreData(RESPONSE)
R = RestoreData(RESPONSE, OUTLIERINDICES)
```

Description

This is a method of `mbcmodel.localresponse` and `mbcmodel.response`.

`R = RestoreData(RESPONSE)` restores all data previously removed as outliers.

`R = RestoreData(RESPONSE, OUTLIERINDICES)` restores all removed data specified in `OutlierIndices`. For a local response, the indices refer to record numbers for all tests.

Examples

```
RemoveOutliers(R, 1:5)
RestoreData(R, 1:2)
```

See Also

[RemoveOutliersForTest](#) | [RemoveOutliers](#) | [OutlierIndices](#)

Introduced in R2007a

RestoreDataForTest

Restore removed outliers for test

Syntax

```
L = RestoreDataForTest(LOCALRESPONSE, TESTNUMBER, Indices)
L = RestoreDataForTest(LOCALRESPONSE, TESTNUMBER, Indices, doUpdate)
```

Description

This is a method of `mbcmodel.localresponse`.

`L = RestoreDataForTest(LOCALRESPONSE, TESTNUMBER, Indices)` restores all removed data for `TESTNUMBER` specified in `Indices`.

`L = RestoreDataForTest(LOCALRESPONSE, TESTNUMBER, Indices, doUpdate)` restores all specified removed data and if `doUpdate` is `true`, refits all response features. By default, all response feature models will be updated. If a number of tests are being screened it is more efficient to set `doUpdate` to `false` and call `UpdateResponseFeatures` when all the tests have been screened.

`Indices` must be numbers and must belong to the set of outliers in `OutliersForTest`.

Examples

For a local response `LOCALRESPONSE`, to remove first two data points without updating response features:

```
RemoveOutliersForTest(LOCALRESPONSE,1,1:2,false);
```

To find list of indices of removed data points:

```
indices = OutliersForTest(LOCALRESPONSE,1);
```

To restore first data point:

```
RestoreDataForTest(LOCALRESPONSE,1,1,false);
```

To restore all data:

```
RestoreDataForTest(LOCALRESPONSE,1,':',false);
```

To update response features:

```
UpdateResponseFeatures(LOCALRESPONSE);
```

See Also

[UpdateResponseFeatures](#) | [RemoveOutliersForTest](#) | [OutlierIndicesForTest](#)

Introduced in R2007a

Save

Save project

Syntax

OK = Save(P)

OK = Save(P, *filename*)

Description

This is a method of `mbcmodel.project`.

OK = Save(P) saves the project P to the currently selected `Filename`. The project Name is used as the `Filename` if none has previously been specified. If neither has been specified then you see a warning that your project has been saved to `Untitled.mat`.

OK = Save(P, *filename*) saves the project P with the name specified by *filename*.

Examples

```
OK = Save(proj, 'Example.mat');
```

See Also

SaveAs

Introduced before R2006a

SaveAs

Save project to new file

Syntax

OK = SaveAs(P, Name)

Description

This is a method of `mbcmodel.project`.

Examples

```
OK = SaveAs(proj, 'Example.mat');
```

See Also

Save

Introduced before R2006a

Scatter2D

Plot design points

Syntax

```
Scatter2D(D,Xindex,Yindex)  
Scatter2D(D,xindex,yindex,plotArguments)
```

Description

Scatter2D is a method of `mbcdoe.design`.

`Scatter2D(D,Xindex,Yindex)` creates a scatter plot of the design points in design `D`, where `X` and `Y` are the indices or symbols for the input factors to plot on the `X` and `Y` axis.

`Scatter2D(D,xindex,yindex,plotArguments)` creates a scatter plot with additional arguments. `plotArguments` specifies additional arguments to the MATLAB `plot` command. The plot command used in `Scatter2D` is

```
plot(D.Points(:,v1),D.Points(:,v2),varargin{:})
```

The default for `varargin` is `''`.

Examples

```
Scatter2D( mainDesign, 1, 2 );
```

Introduced in R2008a

SetTermStatus

Set status of model terms

Syntax

```
M.Properties = M.Properties.SetTermStatus(Terms, Status)
```

Description

This is a method of `mbcmodel.linearmodelproperties`.

`M.Properties = M.Properties.SetTermStatus(Terms, Status)` sets the status of the specified terms in this model. `Status` must be a cell array of status character vectors.

The stepwise status for each term can be `Always`, `Never` or `Step`. The status determines whether you can use the `StepwiseRegression` function to throw away terms in order to try to improve the predictive power of the model.

`M` is an `mbcmodel.linearmodel` object.

Examples

```
M = mbcmodel.CreateModel('Polynomial', 2);  
M.Properties = M.Properties.SetTermStatus([1 2; 1 0],  
    {'Never', 'Always'});
```

This example sets the status of the $X_1 \cdot X_2^2$ term to `Never` and the X_1 term to `Always`.

See Also

[GetTermStatus](#) | [StepwiseStatus](#)

Introduced in R2007a

SetupDialog

Open fit algorithm setup dialog box

Syntax

```
[OPT,OK]= SetupDialog(F)
```

Description

This is a method of `mbcmodel.fitalgorithm`.

`[OPT,OK]= SetupDialog(F)` opens the fit algorithm setup dialog box, where you can edit the algorithm parameters. `F` is a `mbcmodel.fitalgorithm` object.

If you click **Cancel** to dismiss the dialog, `OK = false` and no changes are made. If you click **OK** to close the dialog box, then `OK = true` and your new chosen algorithm parameters are set up.

Examples

```
[OPT,OK]= SetupDialog(F)
```

See Also

`CreateAlgorithm` | `getAlternativeNames`

Introduced in R2007a

SingleVIF

Single VIF matrix for linear model parameters

Syntax

```
VIF = SingleVIF(LINEARMODEL)
```

Description

This is a method of `mbcmodel.linearmodel`.

`VIF = SingleVIF(LINEARMODEL)` calculates the single Variance Inflation Factor (VIF) matrix for the linear model parameters.

Examples

```
VIF = SingleVIF(knot_model)
```

See Also

`ParameterStatistics`

Introduced in R2007a

SizeOfParameterSet

Number of model parameters

Syntax

```
N = params.SizeOfParameterSet
```

Description

This is a property of `mbcmodel.linearmodelparameters`, for linear models only. It returns the total possible number of parameters in the model. Note that not all of these terms are necessarily currently included in the model, as you may remove some using `StepwiseRegression`.

Call `NumberOfParameters` to see how many terms are currently included in the model. Call `StepwiseSelection` to see which terms are included and excluded.

Use `Names` and `Values` to get the parameter names and values.

Examples

```
N = knotparams.SizeOfParameterSet
```

See Also

`NumberOfParameters` | `StepwiseSelection` | `Names` | `Values`

StatisticsDialog

Open summary statistics dialog box

Syntax

```
[model,OK]= StatisticsDialog(model)
```

Description

This is a method of `mbcmodel.model`.

`[model,OK]= StatisticsDialog(model)` opens the Summary Statistics dialog box, where you can select the summary statistics you want to use.

If you click **Cancel** to dismiss the dialog, `OK = false` and no changes are made. If you click **OK** to close the dialog box, then `OK = true` and your new chosen summary statistics are set up.

See Also

`SummaryStatistics`

Introduced in R2007a

Status

Model status: fitted, not fitted or best

Syntax

```
S = model.Status
```

Description

This is a property of `mbcmodel.model`. It returns a character vector: ``Fitted'` if the model is fitted, ``Not fitted'` if the model is not fitted (for example there is not enough data to fit the model), or ``Best'` if the model has been selected as best from some alternative models. A model must be `Fitted` before it can be selected as `Best`.

Examples

```
S = knot.Status  
S =  
    `Fitted'
```

See Also

`ChooseAsBest`

StepwiseRegression

Change stepwise selection status for specified terms

Syntax

```
[S, model] = StepwiseRegression(model, optional toggleTerms)
```

Description

This is a method of `mbcmodel.model`, for linear models only. This method returns the Stepwise table (as in the Stepwise values for `ParameterStatistics`). Leave out `toggleTerms` to get the current Stepwise values. You can choose to remove or include parameters using `StepwiseRegression`, as long as their `StepwiseStatus` is `Step`.

The Stepwise values returned are the same as those found in the table in the Stepwise GUI. For each parameter, the columns are: the value of the coefficient, the standard error of the coefficient, the t value and Next PRESS (the value of PRESS if the status of this term is changed at the next iteration). Look for the lowest Next PRESS to indicate which terms to toggle in order to improve the predictive power of the model.

Call `StepwiseRegression` to toggle between in and out for particular parameters. `toggleTerms` can be either an index that specifies which parameters to toggle, or an array or logical where a true value indicates that a toggle should occur. The example shown toggles parameter 4, after inspection of the Next PRESS column indicates changing the status of this term will result in the lowest PRESS. `StepwiseRegression` returns the new Stepwise values after toggling a parameter.

After making changes to the model using `StepwiseRegression` you must call `UpdateResponse`.

Use `StepwiseStatus` (on the child `modelparameters` object) to see which parameters have a status of `Step`; these can be toggled between in and out using `StepwiseRegression` (on the parent `model` object).

Use `StepwiseSelection` (on the child `modelparameters` object) to view which terms are in and out, as shown in the example.

Examples

```
[S, knot] = StepwiseRegression(knot)
S =
```

```
1.0e+003 *
    0.1316    0.0606    0.0200         NaN
    0.0000    0.0000    0.0200    2.0919
    0.0000    0.0000    0.0190    0.2828
   -0.0000    0.0000    0.0190    0.2531
    0.0000    0.0000    0.0190    0.2680
   -0.0551    0.0347    0.0200    0.2566
    0.0919    0.0264    0.0200    0.3672
   -0.0040    0.0023    0.0200    0.2564
   -0.0178    0.0095    0.0200    0.2644
```

```

0.0008  0.0004  0.0200  0.2787
[S, knot] = StepwiseRegression(knot, 4)

```

```
S =
```

129.8406	60.1899	19.0000	NaN
0.0048	0.0008	19.0000	662.3830
0.0000	0.0000	18.0000	290.8862
-0.0021	0.0019	19.0000	245.9833
0.0001	0.0002	18.0000	281.4104
-50.4091	34.7401	19.0000	262.8346
94.9675	26.3690	19.0000	400.6572
-4.0887	2.2488	19.0000	262.6588
-17.9412	9.4611	19.0000	276.7535
0.8229	0.3734	19.0000	292.0827

```

params = knot.Parameters;
N = params.StepwiseSelection

```

```
N =
```

```

'in'
'in'
'out'
'in'
'out'
'in'
'in'
'in'
'in'
'in'

```

```

>> StepwiseRegression(knot, 4);
params = knot.Parameters;
N = params.StepwiseSelection

```

```
N =
```

```

'in'
'in'
'out'
'out'
'out'
'in'
'in'
'in'
'in'
'in'

```

See Also

[StepwiseSelection](#) | [StepwiseStatus](#) | [UpdateResponse](#)

Introduced before R2006a

StepwiseSelection

Model parameters currently included and excluded

Syntax

```
N = paramsknot.StepwiseSelection
```

Description

This is a read-only property of `mbcmodel.linearmodelparameters`, for linear models only. It returns a status for each parameter in the model, `in` or `out`, depending on whether the term is included or excluded. You can choose to remove or include parameters using `StepwiseRegression`, as long as their `StepwiseStatus` is `Step`. Call `StepwiseRegression` (on the parent model object) to toggle between `in` and `out` for particular parameters. You must then call `UpdateResponse` before calling `StepwiseSelection`.

Examples

```
N = paramsknot.StepwiseSelection
N =
    'in'
    'in'
    'out'
    'out'
    'out'
    'in'
    'in'
    'in'
    'in'
    'in'
```

See Also

[StepwiseRegression](#) | [StepwiseStatus](#) | [NumberOfParameters](#) | [UpdateResponse](#)

StepwiseStatus

Stepwise status of parameters in model

Syntax

```
N = paramsknot.StepwiseStatus
```

Description

This is a method of `mbcmodel.linearmodel.parameters`, for linear models only. It returns the stepwise status of each parameter in the model.

The stepwise status for each term can be `Always`, `Never` or `Step`. The status determines whether you can use the `StepwiseRegression` function to throw away terms in order to try to improve the predictive power of the model.

- `Always` - Always included in the model.
- `Never` - Never included in the model.
- `Step` - You can choose whether to include or exclude this term. Do this by using `StepwiseRegression` to toggle between `in` and `out` for particular parameters.

Use `StepwiseSelection` to find out which terms are currently included and excluded.

Examples

```
N = paramsknot.StepwiseStatus
```

```
N =  
  'Always'  
  'Step'  
  'Step'  
  'Step'  
  'Step'  
  'Step'  
  'Step'  
  'Step'  
  'Step'  
  'Step'  
  'Step'
```

See Also

[StepwiseRegression](#) | [StepwiseSelection](#)

Introduced before R2006a

Style

Style of design type

Syntax

D.Style

Description

Style is a read-only property of `mbcdoe.design`.

D.Style returns the style of the design.

The style of the design is one of :

- 'User-defined'
- 'Optimal'
- 'Space-filling'
- 'Classical'
- 'Experimental data'

The read-only Style property is derived from the design Type.

See Also

Type (for designs and generators)

SummaryStatistics

Summary statistics for response

Syntax

```
S = SummaryStatistics(M)
S = SummaryStatistics(M, Names)
```

Description

This is a method of all model objects (`mbcmodel.model` and `mbcmodel.localmodel`) and response objects (`mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse`, and `mbcmodel.response`).

These statistics appear in the Summary Statistics pane of the Model Browser GUI.

`S = SummaryStatistics(M)` returns summary statistics for the model or response in a structure array containing `Statistics` and `Names` fields.

`S = SummaryStatistics(M, Names)` returns summary statistics specified by `Names` for the model or response in an array. `Names` can be a char array, or a cell array of character vectors.

Examples

```
S = SummaryStatistics(R2);
```

See Also

[DiagnosticStatistics](#) | [AlternativeModelStatistics](#)

Introduced before R2006a

ValidationRMSE

Calculates the validation RMSE for model data

Syntax

```
S = ValidationRMSE(model,X,Y)
```

Description

This is a method of `mbcmodel.model`

`S = ValidationRMSE(model,X,Y)` calculates the root-mean-square error (RMSE) of a validation set.

- $rmse = \sqrt{\text{sum}((Y - \text{evaluate}(\text{model}, X))^2) / N}$
- X and Y are table objects or numeric arrays. N is the number of data points.

Examples

```
S = ValidationRMSE(model,X,Y)
```

See Also

[SummaryStatistics](#) | [UpdateResponse](#)

Introduced in R2019a

SummaryStatisticsForTest

Statistics for specified test

Syntax

```
SS = SummaryStatisticsForTest( LocalResponse, TestNumber )  
SS = SummaryStatisticsForTest(LocalResponse,TestNumber,Names)
```

Description

This is a method of `mbcmodel.localresponse`.

`SS = SummaryStatisticsForTest(LocalResponse, TestNumber)` returns a structure array containing `Statistics` and `Names` fields values for the local model for test `TestNumber`.

`SS = SummaryStatisticsForTest(LocalResponse,TestNumber,Names)` returns an array of the statistics specified by `Names`. `Names` can be a char array, or a cell array of character vectors.

Examples

```
SS = SummaryStatisticsForTest( L, 22 )
```

See Also

`SummaryStatistics`

Introduced in R2007b

TestPlan

Test plan containing boundary tree

Syntax

`Tree.TestPlan`

Description

This is a property of `mbcboundary.Tree` and `mbcboundary.TwoStageTree`.

`Tree.TestPlan` returns the test plan object that contains this boundary tree (read only).

Testplans

Array of test plan objects in project

Syntax

```
tps = project.Testplans
```

Description

This is a property of `mbcmodel.project`.

P is the project object.

Examples

```
tps = project.Testplans;
```

Type (for boundary models)

Boundary model type

Syntax

B.Type

Description

This is a property of `mbcboundary.AbstractBoundary` and all subclasses.

`B.Type` returns the boundary model type. You can only choose a type when you create the boundary. Use the `Type` input argument with `CreateBoundary` to specify what kind of boundary model you want to create, such as 'Star-shaped', 'Range', 'Ellipsoid', 'Convex Hull'.

Use `getAlternativeTypes` to find out what types are available for the specified boundary model.

Available types depend on the boundary model, for example:

- For `mbcboundary.Model`, type can be 'Star-shaped', 'Range', 'Ellipsoid', or 'Convex Hull'
- For `mbcboundary.TwoStage`, `LocalModel` requires a type of either `Range` or `Ellipsoid`, and `GlobalModel` requires a type of `Interpolating RBFonly`.
- For `mbcboundary.PointByPoint`, the `LocalModel` type can be any valid type for `mbcboundary.Model`.

You can only create boundaries of type 'Point-by-point' or 'Two-stage' from a Local boundary tree, or from an existing boundary of type 'Point-by-point' or 'Two-stage'. You cannot create or fit these types of boundary models outside a project. Fit them by adding the boundary model to the boundary tree.

Examples

The following example creates a point-by-point boundary model from the Local boundary tree:

```
B = CreateBoundary(T.Boundary.Local, 'Point-by-point');
```

Create a local boundary with type range:

```
B.LocalModel = CreateBoundary(B.LocalModel, 'Range');
```

See Also

`CreateBoundary` | `getAlternativeTypes`

Type (for candidate sets)

Candidate set type

Syntax

C.Type

Description

This is a property of `mbcdoe.candidateset`.

`C.Type` returns the candidate set type. You can only choose a type when you create the candidate set, when calling `CreateCandidateset`.

You can specify the candidate set type during creation by using the `Type` property, e.g.,

```
CandidateSet = augmentedDesign.CreateCandidateSet...  
( 'Type', 'Grid' );
```

Other available properties depend on the candidate set type. To see the properties you can set, see the table of candidate set properties, [Candidate Set Properties \(for Optimal Designs\)](#).

See Also

`CreateCandidateSet`

Type (for designs and generators)

Design type

Syntax

```
D.Type
G.Type = NewType
```

Description

This is a read-only property of `mbcdoe.design`, and a settable property of `mbcdoe.generator`.

`D.Type` returns the design type. You can only choose a type when you create designs. After design creation, you can only set the `Type` of a `mbcdoe.generator` object, or when calling `Generate` or `Augment`.

`G.Type = NewType` changes the `Type`, where `G` is a `mbcdoe.generator` object.

The design `Type` determines which properties you can set. To set properties, see `Properties` (for design generators).

Get a list of types which could be used as alternative designs for current design, using `getAlternativeTypes`, by entering the following syntax:

```
Dlist = getAlternativeTypes(D)
```

where `D` is an `mbcdoe.design` object.

The design `Type` must be one shown in the following table. The read-only `Style` property is derived from the `Type`.

Style	Type
Optimal	D-Optimal
	V-Optimal
	A-Optimal
Classical	Box-Behnken
	Central Composite
	Full Factorial
	Plackett-Burman
	Regular Simplex
Space-filling	Lattice
	Latin Hypercube Sampling
	Stratified Latin Hypercube
	Sobol Sequence
	Halton Sequence

Style	Type
Experimental data	Design points replaced by data points
Custom	Any design with a mix of Types (eg an optimally augmented space-filling design)

Examples

To specify the Type while creating and then generating a design of a given size:

```
D = CreateDesign(model, 'Type', 'Sobol Sequence')
D = Generate(D, 128);
```

See Also

Properties (for design generators) | Generate | Augment

Type (for design constraints)

Design constraint type

Syntax

C.Type

Description

This is a property of `mbcdoe.constraint`.

`C.Type` returns the design constraint type. You can only choose a type when you create the constraint, when calling `CreateConstraint`.

You can specify the constraint type during creation by using the `Type` property, e.g.,

```
c = D.CreateConstraint('Type', 'Linear')
```

Other available properties depend on the constraint type. See the table `Constraint Properties`.

The constraint `Type` must be one shown in the following table.

Constraint Type	Description
'Linear'	Linear design constraint: $1 * \text{Input1} + 1 * \text{Input2} + 1 * \text{Input3} \leq 0$
'Ellipsoid'	Ellipsoid design constraint: Ellipsoid at ($\text{Input1}=0, \text{Input2}=0, \text{Input3}=0$)
'1D Table'	1D Table design constraint: $\text{InputY}(\text{InputX}) \leq \text{InputY max}$
'2D Table'	2D Table design constraint: $\text{InputZ}(\text{InputX}, \text{InputY}) \leq \text{InputZmax}$

See Also

`CreateConstraint` | `Constraint Properties`

Type (for models)

Valid model types

Syntax

```
model.Type
M = mbcmodel.CreateModel(Type, NUMINPUTS)
M2 = CreateModel(M, Type)
```

Description

This is a property of `mbcmodel.model`.

`model.Type` returns the model type. This property is set at creation time. See `CreateModel`.

The model Type determines which properties you can set. To set properties, see `Properties (for models)`, and `LocalModel Properties`.

Note Spaces and case in model Type are ignored.

The model type must be one shown in the following table.

Type	Model Object
Polynomial	<code>mbcmodel.linearmodel</code>
Hybrid Spline	<code>mbcmodel.linearmodel</code>
RBF	<code>mbcmodel.linearmodel</code>
Hybrid RBF	<code>mbcmodel.linearmodel</code>
Polynomial-RBF	<code>mbcmodel.linearmodel</code>
Hybrid Spline-RBF	<code>mbcmodel.linearmodel</code>
Multiple Linear	<code>mbcmodel.linearmodel</code>
Free Knot Spline	<code>mbcmodel.model</code>
Transient	<code>mbcmodel.model</code>
User-Defined	<code>mbcmodel.model</code>
Neural Network	<code>mbcmodel.model</code>
Interpolating RBF	<code>mbcmodel.model</code>
Local Polynomial Spline	<code>mbcmodel.localmodel</code>
Local Polynomial with Datum	<code>mbcmodel.localmodel</code>
Local Polynomial	<code>mbcmodel.localmodel</code>
Local Hybrid Spline	<code>mbcmodel.localmodel</code>
Local Truncated Power Series	<code>mbcmodel.localmodel</code>

Type	Model Object
Local Free Knot Spline	mbcmodel.localmodel
Local Multiple Models	mbcmodel.localmodel
Local Growth	mbcmodel.localmodel
Local User-Defined	mbcmodel.localmodel
Local Transient	mbcmodel.localmodel
Local Average Fit	mbcmodel.localmodel

Get a list of types, using `getAlternativeTypes`, by entering the following syntax:

```
Mlist = getAlternativeTypes(M)
```

where `M` is an `mbcmodel.model` object.

Create an alternative model as follows: `M = mbcmodel.CreateModel(Type, NUMINPUTS)` or `M2 = CreateModel(M, Type)`.

See Also

[Properties \(for models\)](#) | [getAlternativeTypes](#) | [CreateModel](#)

Units

Model output units

Syntax

```
model.Units  
modelinput.Units
```

Description

This is a property of `mbcmodel.model` and `mbcmodel.modelinput` objects.

`model.Units` or `modelinput.Units` return the units of the model or modelinput object.

This property is set to the data signal units when the response is created or if a model is assigned to a response. This property cannot be set when a response is attached to the model.

Update

Update boundary model in tree and fit to test plan data

Syntax

```
B = Update(Tree, Index, B)
B = Update(Tree, Index, B, InBest)
```

Description

This is a method of `mbcboundary.Tree`.

`B = Update(Tree, Index, B)` updates the boundary model `B` in the boundary tree `Tree`, and fits the boundary model to the test plan data. `Tree` is an `mbcboundary.Tree` object, `Index` is the index to boundary model in the tree, and `B` is a boundary model object. The boundary model must have the same inputs as the boundary tree. The boundary model is always fitted when you add it to the boundary tree. This fitting ensures that the fitting data is compatible with the test plan data. The method returns the fitted boundary model.

`B = Update(Tree, Index, B, InBest)` updates the boundary model in the tree and `InBest` specifies whether to include the boundary model in the best boundary model for the boundary tree. By default, the boundary model retains its previous `InBest` status after calling `Update`.

See Also

Add | Remove | CreateBoundary

Introduced in R2009b

UpdateDesign

Update design in test plan

Syntax

```
D = UpdateDesign(T,D)
D = UpdateDesign(T,Level,D)
```

Description

UpdateDesign is a method of `mbcmodel.testplan`. You must call `UpdateDesign` to replace an edited design in the test plan.

`D = UpdateDesign(T,D)` updates the design.

`D = UpdateDesign(T,Level,D)` updates the design at the specified level.

`D` is the array of designs to be updated in the test plan, `T`.

`Level` is the test plan level. By default the level is the outer level (i.e., Level 1 for One-stage, Level 2 (global) for Two-stage).

The design Name is used to decide what to update. If no name match is found in the test plan, the design is added.

Design names must be unique so any repeated names will be changed. The array of designs is an output.

See Also

[AddDesign](#) | [RemoveDesign](#) | [FindDesign](#)

Introduced in R2008a

UpdateResponse

Replace model in response

Syntax

```
UpdateResponse(model)
```

```
M = UpdateResponse( M , R); updates the response specified by R
```

Description

This is a method of `mbcmodel.model`. This takes the model and places it back into the response it came from. Appropriate action is taken if a refit is necessary because you have modified either the model, response data or model data in the interim. For example, if you have changed the model type, the new model is fitted to the response data. If you have changed the response data (e.g. removed an outlier), the model is fitted to the new response data.

Note that when changing the model type or settings (using the `ModelSetup` command) the response is not refitted until you call `UpdateResponse`. If you have changed the model by using `StepwiseRegression` you must call `UpdateResponse`.

```
UpdateResponse( M )
```

updates the model in the response associated with the model.

```
M = UpdateResponse( M , R);
```

updates the response specified by R.

Examples

```
UpdateResponse(knot);
```

See Also

`ModelSetup`

Introduced before R2006a

UpdateResponseFeatures

Refit response feature models

Syntax

```
UpdateResponseFeatures(L)
```

Description

This is a method of `mbcmodel.localresponse`.

`UpdateResponseFeatures(L)` refits all response feature models. You need to call this if you used `RemoveOutliersForTest` without specifying refitting the response features (`doUpdate` set to `false`).

Examples

For a local response `LOCALRESPONSE`, to remove first two data points without updating response features:

```
RemoveOutliersForTest(LOCALRESPONSE, 1, 1:2, false);
```

To update response features:

```
UpdateResponseFeatures(LOCALRESPONSE);
```

See Also

[RemoveOutliersForTest](#) | [RestoreDataForTest](#)

Introduced in R2007a

Values

Values of model parameters

Syntax

```
vals = paramsknot.Values
```

Description

This is a read-only property of `mbcmodel.modelparameters`. It returns the value of each parameter in the model. Use `Names` to find out the names of these terms.

Examples

```
vals = paramsknot.Values;
```

See Also

`Names`

Widths

Width data from RBF model

Syntax

```
Width = params.Widths
```

Description

This is a property of `mbcmodel.rbfmodelparameters`, for Radial Basis Function (RBF) models only.

Width is usually a single value, but can also be of size 1 by number of variables in the case of the width per dimension algorithm, or number of centers by number of variables in the case of tree regression.

Examples

```
Width = params.Widths;
```

See Also

Centers

xregstatsmodel

Class for evaluating models and calculating PEV

Syntax

```
y = StatsModel(X)
Y = EvalModel(StatsModel, X)
[pev, Y] = pev(StatsModel, X)
C = ceval(StatsModel, X)
df = dferror(StatsModel)
Interval = predint(StatsModel,X,Level);
n = nfactors(StatsModel)
[n,symbols,units] = nfactors(StatsModel)
```

Description

Use the `xregstatsmodel` class to evaluate a model and calculate the prediction error variance.

You can create an `xregstatsmodel` object by either:

- Exporting a model from the Model Browser to the workspace.
- Converting any command line response or model object to an `xregstatsmodel` by using the `Export` method.

Use the `Export` method to convert `mbcmodel.hierarchicalresponse`, `mbcmodel.localresponse`, `mbcmodel.response` and `mbcmodel.model` objects to `xregstatsmodel` objects. Use the syntax `ExportedModel = Export(MODEL)`. The default format is 'MATLAB' so you do not need to specify the format.

After you create an `xregstatsmodel` object, you can use the following methods to evaluate the model and calculate the prediction error variance:

- `EvalModel` — evaluate model
- `pev` — evaluate prediction error variance
- `ceval` - evaluate boundary model
- `dferror` — degrees of freedom for error
- `predint` — calculate confidence intervals for model prediction
- `nfactors` — get number of input factors

If you convert an `mbcmodel.localresponse` object using `Export` and you have not created a two-stage model (hierarchical response object), then the output is an `mbcPointByPointModel` object. Point-by-point models are created from a collection of local models for different operating points. `mbcPointByPointModel` objects share all the same methods as `xregstatsmodel` except `dferror`.

`y = StatsModel(X)` evaluates the `xregstatsmodel` model object `StatsModel` at input values `X`. `X` is a (N-by-NF) array, where NF is the number of inputs, and N the number of points to evaluate the model at.

`Y = EvalModel(StatsModel, X)` evaluates the model at input values `X`. You can also evaluate models using parentheses, e.g., `y = StatsModel(X)`

`[pev, Y] = pev(StatsModel, X)` calculates the prediction error variance of the model at `X`, `pev`, and also returns `Y` the evaluated model at `X`.

`C = ceval(StatsModel, X)` evaluates the boundary model constraints at `X`.

`df = dferror(StatsModel)` gets the degrees of freedom for the model.

`Interval = predint(StatsModel,X,Level)`; calculates the confidence interval for model prediction. A `Level` confidence interval of the predictions is calculated about the predicted value. The default value for `Level` is 99. `Interval` is a Nx2 array where the first column is the lower bound and the second column is the upper bound.

`n = nfactors(StatsModel)` gets the number of input factors of the model. `[n,symbols,units]`
`= nfactors(StatsModel)` returns the number, symbols and units of the input factors in the model.

See Also

Export

Introduced in R2010a

MBCModel.Data

mbcmodel.data

Properties and methods for data objects

Description

Use these properties and object functions to create and examine data objects.

Creation

Syntax

```
DataObj = mbcmodel.CreateData(filename)
DataObj = CreateData(ProjObj)
DataObj = CreateData(ProjObj, filename)
DataObj = CreateData(ProjObj, table)
DataObj = CreateData(ProjObj, mbcdatastructure)
DataObj = CreateData(ProjObj, filename, filetype)
```

Description

`DataObj = mbcmodel.CreateData(filename)` creates a data object for data contained in *filename*. Use this syntax to create a data object that is independent of a project.

`DataObj = CreateData(ProjObj)` creates a data object in a project object *ProjObj*.

`DataObj = CreateData(ProjObj, filename)` creates a data object in a project object *ProjObj*. The data is in a file, *filename*, specified as a character vector containing the full path to the file.

`DataObj = CreateData(ProjObj, table)` creates a data object in a project object *ProjObj*. The data is contained in a table object, *table*.

`DataObj = CreateData(ProjObj, mbcdatastructure)` creates a data object for an MBC data structure in a project object *ProjObj*. *mbcdatastructure* is the MBC data structure name.

`DataObj = CreateData(ProjObj, filename, filetype)` creates a data object in a project object *ProjObj*. The data is in a file, *filename*, specified as a character vector containing the full path to the file. *filetype* is a character vector specifying the file type.

Properties

Name — Data object name

character vector

Name of the data object.

Example: 'holliday_data.mat'

Data Types: char | string

Data Types: `logical`

IsBeingEdited — Boolean signaling if data or model is being edited

`true` or `1` | `false` or `0`

This property is read-only.

Boolean signaling if data or model is being edited.

Example: `0`

Data Types: `logical`

Owner — `mbcmodel.project` object containing data

`0`-by-`1` array

This property is read-only.

`mbcmodel.project` or `mbcmodel.testplan` object containing the data. The array is:

- Empty if `mbcmodel.CreateData` created the data.
- An `mbcmodel.project` object if a project contained the data.
- An `mbcmodel.testplan` object if a test plan contained the data.

Data Types: `function_handle`

SignalNames — Signal names in data

`n`-by-`1` array

This property is read-only.

`n`-by-`1` array of character vectors that contains the data signal names, where *n* is the number of signals.

Example: `["afr" "egr" "load" "n" "spark" "logno" "tq"]`

Data Types: `string`

SignalUnits — Signal units in data

`n`-by-`1` array

This property is read-only.

`n`-by-`1` array of character vectors that contains the data signal units, where *n* is the number of signals.

Example: `["%" "% "ratio" "rpm" "deg" "none" "ft lbf"]`

Data Types: `string`

Filters — Structure array containing user-defined filters

array

This property is read-only.

Structure array holding user-defined filters. The array is the same length as the number of currently defined filters, with the following fields for each filter:

- **Expression** — The character vector expression as defined in `AddFilter` or `ModifyFilter`.
- **AppliedOK** — Boolean indicating that the filter was successfully applied.
- **RemovedRecords** — Boolean vector indicating which records the filter removed. Note that many filters could remove the same record.
- **Message** — Character vector holding information on the success or otherwise of the filter.

See also `AddFilter`, `ModifyFilter`, and `RemoveFilter`.

Data Types: struct

TestFilters — Structure array containing user-defined test filters

array

This property is read-only.

Structure array holding user-defined test filters. The array is the same length as the number of currently defined test filters, with the following fields for each filter:

- **Expression** — The character vector expression as defined in `AddTestFilter` or `ModifyTestFilter`.
- **AppliedOK** — Boolean indicating that the filter was successfully applied.
- **RemovedTests** — Boolean vector indicating which records the filter removed. Note that many filters could remove the same test.
- **Message** — Character vector holding information on the success or otherwise of the test filter.

See also `AddTestFilter`, `ModifyTestFilter`, and `RemoveTestFilter`.

Data Types: struct

UserVariables — Structure array holding user-defined variables

array

This property is read-only.

Structure array holding user-defined variables. The array is the same length as the number of currently defined variables, with the following fields for each filter:

- **Variable** — Variable Name
 - **Expression** — The character vector expression as defined in `AddVariable` or `ModifyVariable`.
 - **Units** — The character vector defining the units.
 - **AppliedOK** — Boolean indicating that the variable expression was successfully applied.
 - **Message** — Character vector holding information on the success or otherwise of the variable.

See also `AddVariable`, `ModifyVariable`, and `RemoveVariable`.

Data Types: struct

Object Functions

`AddFilter`

Add filter to data set

`AddTestFilter`

Add test filter to data set

AddVariable	Add variable to data set
Append	Append data to data set
BeginEdit	Begin editing a data object
CommitEdit	Apply changes in data
DefineNumberOfRecordsPerTest	Define exact number of records per test
DefineTestGroups	Define rule-based test groupings
ExportToTable	Export data to table object
ExportToMBCDataStructure	Export data to MBC data structure
ImportFromFile	Import data from file
ImportFromMBCDataStructure	Load data from MBC data structure
ImportFromTable	Load data from a table object
ModifyFilter	Modify filter in data set
ModifyTestFilter	Modify test filter in data set
ModifyVariable	Modify variable in data set
RemoveFilter	Remove filter from data set
RemoveTestFilter	Remove test filter from data set
RemoveVariable	Remove variable from data set
RollbackEdit	Undo most recent changes to data
Value	Extract data values from data object

Examples

Create a Data Object

This example shows how to create a new data object that is independent of a project. *filename* is a character vector specifying the full path to the file. To use the data object in another test plan, use `AttachData`.

```
DataObj = mbcmodel.CreateData(filename);  
testplan.AttachData(DataObj);
```

Create a Data Object in a Project Object

This example shows how to create a data object in an existing project object *ProjObj*.

```
data = CreateData(ProjObj, 'D:\MBCWork\data1.xls');  
DataObj = mbcmodel.CreateData;  
DataObj = mbcmodel.CreateData('D:\MBCWork\data.xls');
```

See Also

`CreateData`

Topics

“Load and Modify Data”

Introduced before R2006a

AddFilter

Add filter to data set

Syntax

```
DataObjMod = AddFilter(DataObj,Expr)
```

Description

`DataObjMod = AddFilter(DataObj,Expr)` adds a filter to the dataset that exclude some records. Define the filter using logical operators or a logical function on the existing variables.

Examples

Add Filter

Add a filter that keeps records when `AFR < AFR_CALC +10`.

```
DataObjMod = AddFilter(DataObj, 'AFR < AFR_CALC + 10');
```

Add a filter that uses the function `MyFilterFunction`. The function uses the variables `AFR`, `RPM`, `TQ`, and `SPK`.

```
DataObjMod = AddFilter(DataObj, 'MyFilterFunction(AFR, RPM, TQ, SPK)');
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Expr — Expression

character vector

Input character vector containing the expression. To define the expression, use logical operators or a logical function on the existing variables.

Example: `'AFR < AFR_CALC + 10'`

Data Types: `char`

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

AddTestFilter | ModifyFilter | ModifyTestFilter | RemoveFilter | mbcmodel.data

Introduced before R2006a

AddTestFilter

Add test filter to data set

Syntax

```
DataObjMod = AddTestFilter(DataObj,Expr)
```

Description

`DataObjMod = AddTestFilter(DataObj,Expr)` adds a test filter to the dataset that excludes some tests. Define the filter using logical operators or a logical function on the existing variables.

Examples

Add Test Filter

Include all tests in which all records have speed, *n*, greater than 1000.

```
DataObjMod = AddTestFilter(DataObj, 'any(n>1000)');
```

Include all tests with more than 6 records.

```
DataObjMod = AddTestFilter(DataObj, 'length(LOGNO) > 6');
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Expr — Expression

character vector

Input character vector containing the expression. To define the expression, use logical operators or a logical function on the existing variables.

Example: `'AFR < AFR_CALC + 10'`

Data Types: `char`

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

AddFilter | ModifyTestFilter | RemoveTestFilter | mbcmodel.data

Introduced before R2006a

AddVariable

Add variable to data set

Syntax

```
DataObjMod = AddVariable(DataObj,Expr,Units)
```

Description

`DataObjMod = AddVariable(DataObj,Expr,Units)` adds a variable to the data set. Variable names are case sensitive.

Examples

Add New Variable

Add a variable, *MY_NEW_VARIABLE*, that depends on *TQ* and *AFR*.

```
DataObjMod = AddVariable(DataObj, 'MY_NEW_VARIABLE = TQ*AFR/2');
```

Add a variable that uses the function `MyVariableFunction`. The function uses the variables *TQ*, *AFR*, and *RPM*.

```
DataObjMod = AddVariable(DataObj, 'funcVar = MyVariableFunction(TQ, AFR, RPM)', 'lb');
```

Add a variable if the signal names in data do not match the model input factors in the test plan template file.

```
DataObjMod = AddVariable(DataObj, 'TQ=tq');
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Expr — Expression

character vector

Input character vector containing the expression. To define the expression, use logical operators or a logical function on the existing variables.

Example: `'AFR < AFR_CALC + 10'`

Data Types: `char`

Units — Units, optional

character vector

Input character vector containing the expression that defines the variable units.

Example: 'lb'

Data Types: char

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`ModifyVariable` | `RemoveVariable` | `mbcmodel.data`

Introduced before R2006a

Append

Append data to data set

Syntax

```
DataObjMod = Append(DataObj,otherData)
```

Description

`DataObjMod = Append(DataObj,otherData)` adds new data to an existing data set.

Examples

Append Data

```
DataObjMod = Append(DataObj,CreateData('aDataFile.xls'));  
DataObjMod = Append(DataObj,rand(10,100));
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

otherData — Expression

`mbcmodel.data` object | array

If `otherData` is an `mbcmodel.data` object, then `Append` looks for common `SignalNames` between the two sets of data. If the method does not find common `SignalNames`, the method throws an error. The method appends any common signals to the existing data and fills other signals with `NAN`.

If `otherData` is an array, then it must have exactly the same number of columns as there are `SignalNames` in the data. The method applies `vertcat` (vertical concatenation) between the existing data and `otherData`.

Example: `rand(10,100)`

Data Types: `function_handle` | `double`

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`CreateData` | `mbcmodel.data`

Introduced before R2006a

BeginEdit

Begin editing a data object

Syntax

```
DataObjMod = BeginEdit(DataObj)
```

Description

`DataObjMod = BeginEdit(DataObj)` allows you to edit a data object. You must call `BeginEdit` before to modifying a data object. `BeginEdit` throws an error if you cannot edit the data.

You can use `BeginEdit` if the `DataObj` property `Editable` is true. Otherwise, `BeginEdit` throws an error.

Examples

Begin Editing

This example shows you how to use `BeginEdit`. Use `CommitEdit` to commit edited data to data object, *DataObj*, in a project object, *ProjObj*.

```
DataObj = ProjObj.Data;
BeginEdit(DataObj);
AddVariable(DataObj, 'TQ = tq', 'lbft');
AddFilter(DataObj, 'TQ < 200');
DefineTestGroups(DataObj, {'RPM' 'AFR'}, [50 10], 'MyLogNo');
CommitEdit(DataObj);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

[AddFilter](#) | [AddVariable](#) | [CommitEdit](#) | [DefineTestGroups](#) | `mbcmodel.data`

Introduced before R2006a

CommitEdit

Apply changes in data

Syntax

```
DataObjMod = CommitEdit(DataObj)
```

Description

`DataObjMod = CommitEdit(DataObj)` applies data changes to a data object. For example, use `CommitEdit` after you create new variables or apply filters to remove unwanted data.

You can use `CommitEdit` if the `DataObj` properties `Editable` and `IsBeingEdited` are both true. Otherwise, `CommitEdit` throws an error.

Examples

Commit Edited Data

This example shows you how to commit edited data to data object, *DataObj*, in a project object, *ProjObj*.

```
DataObj = ProjObj.Data;  
BeginEdit(DataObj);  
AddVariable(DataObj, 'TQ = tq', 'lbft');  
AddFilter(DataObj, 'TQ < 200');  
DefineTestGroups(DataObj, {'RPM' 'AFR'}, [50 10], 'MyLogNo');  
CommitEdit(DataObj);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

[AddFilter](#) | [AddVariable](#) | [BeginEdit](#) | [DefineTestGroups](#) | `mbcmodel.data`

Introduced before R2006a

DefineNumberOfRecordsPerTest

Define exact number of records per test

Syntax

```
DataObjMod = DefineNumberOfRecordsPerTest(DataObj, Number, TestNumAlias)
```

Description

`DataObjMod = DefineNumberOfRecordsPerTest(DataObj, Number, TestNumAlias)` defines the number of records per test. Use `DefineNumberOfRecordsPerTest` to set one test per record for one-stage modeling.

Examples

Define Number of Records Per Test

```
DataObjMod = DefineNumberOfRecordsPerTest(DataObj, 1);
DataObjMod = DefineNumberOfRecordsPerTest(DataObj, 10, 'MYLOGNO');
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Number — Number of records

scalar

Number of records to include in each test. Usually, this is one test per record.

Example: 1

Data Types: double

TestNumAlias — Test number alias, optional

character vector

Optional character vector input to define the `SignalName` that the software should use as the test number. Defaults to the test index.

Note For the test number, `testnumAlias` uses the first record in the test. Test numbers are unique, so the method does not modify duplicates.

Data Types: char

Output Arguments

DataObjMod — **Modified instance of mbcmodel.data class**

mbcmodel.data object

Modified mbcmodel.data object.

See Also

DefineTestGroups | mbcmodel.data

Introduced before R2006a

DefineTestGroups

Define rule-based test groupings

Syntax

```
DataObjMod = DefineTestGroups(DataObj,Variables,Tolerances,TestNumAlias,
Reorder)
```

Description

`DataObjMod = DefineTestGroups(DataObj,Variables,Tolerances,TestNumAlias,Reorder)` defines a rule-based test group. You can impose rules to sort records of `DataObj` into groups. The groups are tests. Two-stage models use the test groupings to define hierarchical structure in the data.

Use `DefineTestGroups` to set variables to group. The method uses the tolerance to define groups. When the value of any specified variable changes by more than the tolerance, the method defines a new group.

Examples

Define Test Groups

```
DataObjMod = DefineTestGroups(DataObj, {'AFR' 'RPM'}, [0.1 30], 'MYLOGNO', false);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Variables — Variables

character vector

Character vector containing the `SignalNames` that define the test groupings.

Data Types: `char`

Tolerances — Variable tolerances

array

Array containing the tolerances for the test grouping definition. Same length as `Variables` vector.

Data Types: `double`

TestNumAlias — Test number alias, optional

character vector

Optional character vector input to define the `SignalName` that the software should use as the test number. Defaults to the test index.

Note For the test number, `testnumAlias` uses the first record in the test. Test numbers are unique, so the method does not modify duplicates.

Data Types: `char`

Reorder — Boolean to reorder

`false` or `0` (default) | `true` or `1`

Set to `true` to reorder data.

Data Types: `logical`

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`DefineNumberOfRecordsPerTest` | `mbcmodel.data`

Introduced before R2006a

ExportToMBCDataStructure

Export data to MBC data structure

Syntax

```
mbcStruct = ExportToMBCDataStructure(DataObj)
```

Description

`mbcStruct = ExportToMBCDataStructure(DataObj)` converts the data object to the MBC data structure format.

Examples

Export Data to MBC Data Structure

```
mbcStruct = ExportToMBCDataStructure(DataObj);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Output Arguments

mbcStruct — MBC data structure

`mbcmodel.data` object

An MBC data structure is a structure array that contains these fields:

- `varNames` — Cell array of character vectors that hold the names of the variables in the data (1xn or nx1).
- `varUnits` — Cell array of character vectors that hold the units associated with the variables in `varNames` (1xn or nx1). If array is empty, no units are defined.
- `data` — Array that holds the values of the variables (mxn).
- `comment` — Optional character vector holding comment information about the data.

See Also

`ImportFromMBCDataStructure` | `mbcmodel.data`

Introduced before R2006a

ImportFromFile

Import data from file

Syntax

```
DataObjMod = ImportFromFile(DataObj, filename, filetype, sheetname)
```

Description

`DataObjMod = ImportFromFile(DataObj, filename, filetype, sheetname)` imports data on `sheetname` from `filename` of `filetype` to your data object.

Before using the method, use `CreateData` and `BeginEdit` so that you can add data to the data object.

Examples

Import Data to Data Object

```
DataObjMod = ImportFromFile(DataObj, filename, filetype)
DataObjMod = ImportFromFile(DataObj, filename, 'Excel file', SHEETNAME)
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

filename — File name

character vector

Input character vector containing the path and name of the file.

Example: 'D:\MBCData\Raw Data\testdata.xls'

Data Types: char

filetype — File type, optional

character vector

Input character vector containing the the file type. For allowed file types, see `DataFileTypes`.

If you do not enter a `filetype`, the method uses the file extension to provide the `filetype`. If the file extension is `.xls`, then the method uses Excel.

Example: 'Excel file'

Data Types: char

sheetname — Sheet name, optional

character vector

Input character vector containing the sheet name.

Example: 'lb'

Data Types: char

Output Arguments**DataObjMod** — Modified instance of `mbcmodel.data` class`mbcmodel.data` objectModified `mbcmodel.data` object.**See Also**Append | BeginEdit | CreateData | ImportFromMBCDataStructure | `mbcmodel.data`**Introduced before R2006a**

ImportFromMBCDataStructure

Load data from MBC data structure

Syntax

```
DataObjMod = ImportFromMBCDataStructure(DataObj,mbcStruct)
```

Description

`DataObjMod = ImportFromMBCDataStructure(DataObj,mbcStruct)` imports an MBC data structure to your `DataObj`.

Before using the method, use `CreateData` and `BeginEdit` so that you can add data to the data object.

Examples

Import from MBC Data Structure

```
DataObjMod = ImportFromMBCDataStructure(DataObj,mbcStruct);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

mbcStruct — MBC data structure

`mbcmodel.data` object

An MBC data structure is a structure array that contains these fields:

- `varNames` — Cell array of character vectors that hold the names of the variables in the data (1xn or nx1).
- `varUnits` — Cell array of character vectors that hold the units associated with the variables in `varNames` (1xn or nx1). If array is empty, no units are defined.
- `data` — Array that holds the values of the variables (mxn).
- `comment` — Optional character vector holding comment information about the data.

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

Append | BeginEdit | CreateData | ExportToMBCDataStructure | mbcmodel.data

Introduced before R2006a

ModifyFilter

Modify filter in data set

Syntax

```
DataObjMod = ModifyFilter(DataObj, Index, Expr)
```

Description

`DataObjMod = ModifyFilter(DataObj, Index, Expr)` modifies a dataset filter. Define the filter using logical operators or a logical function on the existing variables.

Examples

Modify Filter

Modify filter number 3 to keep all records where `AFR < AFR_CALC + 20`.

```
DataObjMod = ModifyFilter(DataObj, 3, 'AFR < AFR_CALC + 20');
```

Modify filter number 2 to apply the function `MyNewFilterFunction`.

```
ModifyFilter(DataObj, 2, 'MyNewFilterFunction(AFR, RPM, TQ, SPK)');
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Index — Input index

scalar

Input index to indicate which of the available filters you want to modify. Use the `mbcmodel.data` object `Filters` property to find the index for each filter.

Example: 2

Data Types: int

Expr — Expression

character vector

Input character vector containing the expression. To define the expression, use logical operators or a logical function on the existing variables.

Example: 'AFR < AFR_CALC + 10'

Data Types: char

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`AddFilter` | `RemoveFilter` | `mbcmodel.data`

Introduced before R2006a

ModifyTestFilter

Modify test filter in data set

Syntax

```
DataObjMod = ModifyTestFilter(DataObj, Index, Expr)
```

Description

`DataObjMod = ModifyTestFilter(DataObj, Index, Expr)` modifies a dataset test filter. Define the test filter using logical operators or a logical function on the existing variables.

Examples

Modify Test Filter

Modify test filter number 2 to include all tests in which any records have speed, *n*, greater than 2000.

```
DataObjMod = ModifyTestFilter(DataObj, 2, 'any(n>2000)');
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Index — Input index

scalar

Input index to indicate which of the available filters you want to modify. Use the `mbcmodel.data` object `Filters` property to find the index for each filter.

Example: 2

Data Types: `int`

Expr — Expression

character vector

Input character vector containing the expression. To define the expression, use logical operators or a logical function on the existing variables.

Example: `'AFR < AFR_CALC + 10'`

Data Types: `char`

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`AddTestFilter` | `RemoveTestFilter` | `mbcmodel.data`

Introduced before R2006a

ModifyVariable

Modify variable in data set

Syntax

```
DataObjMod = ModifyVariable(DataObj,Index,Expr,Units)
```

Description

`DataObjMod = ModifyVariable(DataObj,Index,Expr,Units)` modifies a variable in the data set. Variable names are case sensitive.

Examples

Modify Variable

```
DataObjMod = ModifyVariable(DataObj, 2, 'MY_NEW_VARIABLE = TQ*AFR/2');
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Index — Input index

scalar

Input index to indicate which of the available filters you want to modify. Use the `mbcmodel.data` object `Filters` property to find the index for each filter.

Example: 2

Data Types: `int`

Expr — Expression

character vector

Input character vector containing the expression. To define the expression, use logical operators or a logical function on the existing variables.

Example: `'AFR < AFR_CALC + 10'`

Data Types: `char`

Units — Units, optional

character vector

Input character vector containing the expression that defines the variable units.

Example: `'lb'`

Data Types: char

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`AddVariable` | `RemoveVariable` | `mbcmodel.data`

Introduced before R2006a

RemoveFilter

Remove filter from data set

Syntax

```
DataObjMod = RemoveFilter(DataObj,Index)
```

Description

DataObjMod = RemoveFilter(DataObj,Index) removes a dataset filter.

Examples

Remove Filter

Remove filter number 3.

```
RemoveFilter(DataObj,3);
```

Input Arguments

DataObj — Instance of mbcmodel.data class

mbcmodel.data object

mbcmodel.data data object.

Index — Input index

scalar

Input index to indicate which of the available filters you want to modify. Use the mbcmodel.data object Filters property to find the index for each filter.

Example: 2

Data Types: int

Output Arguments

DataObjMod — Modified instance of mbcmodel.data class

mbcmodel.data object

Modified mbcmodel.data object.

See Also

AddFilter | mbcmodel.data

Introduced before R2006a

RemoveTestFilter

Remove test filter from data set

Syntax

```
DataObjMod = RemoveTestFilter(DataObj, Index)
```

Description

`DataObjMod = RemoveTestFilter(DataObj, Index)` removes a dataset test filter.

Examples

Remove Test Filter

Remove test filter number 2.

```
RemoveTestFilter(DataObj, 2);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Index — Input index

scalar

Input index to indicate which of the available filters you want to modify. Use the `mbcmodel.data` object `Filters` property to find the index for each filter.

Example: 2

Data Types: `int`

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`AddTestFilter` | `ModifyTestFilter` | `mbcmodel.data`

Introduced before R2006a

RemoveVariable

Remove variable from data set

Syntax

```
DataObjMod = RemoveVariable(DataObj,Index)
```

Description

`DataObjMod = RemoveVariable(DataObj,Index)` removes a variable from a dataset.

Examples

Remove Variable

Remove variable number 2.

```
RemoveVariable(DataObj,2);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Index — Input index

scalar

Input index to indicate which of the available filters you want to modify. Use the `mbcmodel.data` object `Filters` property to find the index for each filter.

Example: 2

Data Types: `int`

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`AddVariable` | `ModifyVariable` | `mbcmodel.data`

Introduced before R2006a

RollbackEdit

Undo most recent changes to data

Syntax

```
DataObjMod = RollbackEdit(DataObj)
```

Description

`DataObjMod = RollbackEdit(DataObj)` reverts changes that you made to the data since you called `BeginEdit`. For example, use `RollbackEdit` to revert edits you made importing or appending data, applying filters or creating new user variables.

Examples

Revert Edits

This example shows how to revert edits for a data object in a project object *ProjObj*.

```
DataObj = ProjObj.Data;
BeginEdit(DataObj);
AddVariable(DataObj, 'TQ = tq', 'lbft');
AddFilter(DataObj, 'TQ < 200');
DefineTestGroups(DataObj, {'RPM' 'AFR'}, [50 10], 'MyLogNo');
RollbackEdit(DataObj);
```

This example shows how to revert edits when `IsEditable` is false and `IsBeingEdited` is true. *ProjObj* is a `mbcmodel.project` object, `d` and `d1` are `mbcmodel.data` objects.

```
D = ProjObj.Data;
D1 = ProjObj.Data;
BeginEdit(D1);
tp = ProjObj.Testplan;
Attach(tp, D);
```

This example shows how to revert edits when `IsEditable` for `D1` is false because it is Attached to the test plan. To modify `D1`, use the test plan. However:

```
OK = D1.IsBeingEdited
```

Is true. Calling `CommitEdit` will fail.

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

`BeginEdit` | `CommitEdit` | `mbcmodel.data`

Introduced before R2006a

Value

Extract data values from data object

Syntax

```
val = Value(DataObj, varNames, testNumbers)
```

Description

`val = Value(DataObj, varNames, testNumbers)` extracts data values from the data object.

Examples

Extract Data Values

Extract values from a data object.

```
val = Value(DataObj, 'SPK', 1);
val = Value(DataObj, {'SPK' 'AFR'}, ':');
val = Value(DataObj, [1 3 4 5]);
val = Value(DataObj, ':', [1 4 6 8]);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

varNames — Variable names, optional

array

Optional input that specifies either the name of the signal that you want to extract or an array of names. Defaults to `':'`.

Example: `'SPK'`

Example: `{'SPK' 'AFR' 'TQ'}`

Example: `':'`

Data Types: `char`

testNumbers — Test numbers, optional

scalar | vector

Optional input that specifies which test indices you want. Defaults to `':'`.

Example: `1`

Example: `[1 3 4 5]`

Example: ' : '

Data Types: uint

Output Arguments

val — Data values

vector

Extracted data object values.

Data Types: double

See Also

`mbcmodel.data`

Introduced before R2006a

ExportToTable

Export data to table object

Syntax

```
TableObj = ExportToTable(DataObj)
```

Description

TableObj = ExportToTable(DataObj) exports data to a table object.

Examples

Export Data to Table Object

```
TableObj = ExportToTable(DataObj);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

Output Arguments

TableObj — Table object

table object

Table object.

See Also

CreateData | ImportFromTable | `mbcmodel.data`

Introduced in R2019a

ImportFromTable

Load data from a table object

Syntax

```
DataObjMod = ImportFromTable(DataObj,TableObj)
```

Description

DataObjMod = ImportFromTable(DataObj,TableObj) loads data from a table object.

Examples

Import Data from Table Object

```
DataObjMod = ImportFromTable(DataObj,TableObj);
```

Input Arguments

DataObj — Instance of `mbcmodel.data` class

`mbcmodel.data` object

`mbcmodel.data` data object.

TableObj — Table object

table object

Table object.

Output Arguments

DataObjMod — Modified instance of `mbcmodel.data` class

`mbcmodel.data` object

Modified `mbcmodel.data` object.

See Also

CreateData | ExportToTable | `mbcmodel.data`

Introduced in R2019a