

Simulink® Coverage™

Reference



MATLAB® & SIMULINK®

R2022b



How to Contact MathWorks



Latest news: www.mathworks.com
Sales and services: www.mathworks.com/sales_and_services
User community: www.mathworks.com/matlabcentral
Technical support: www.mathworks.com/support/contact_us



Phone: 508-647-7000



The MathWorks, Inc.
1 Apple Hill Drive
Natick, MA 01760-2098

Simulink® Coverage™ Reference

© COPYRIGHT 2017–2022 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

September 2017	Online only	New for Version 4.0 (Release 2017b)
March 2018	Online only	Revised for Version 4.1 (Release 2018a)
September 2018	Online only	Revised for Version 4.2 (Release 2018b)
March 2019	Online only	Revised for Version 4.3 (Release R2019a)
September 2019	Online only	Revised for Version 4.4 (Release R2019b)
March 2020	Online only	Revised for Version 5.0 (Release R2020a)
September 2020	Online only	Revised for Version 5.1 (Release R2020b)
March 2021	Online only	Revised for Version 5.2 (Release R2021a)
September 2021	Online only	Revised for Version 5.3 (Release R2021b)
March 2022	Online only	Revised for Version 5.4 (Release R2022a)
September 2022	Online only	Revised for Version 5.5 (Release R2022b)

1	<hr/> Functions
2	<hr/> Simulink Coverage Settings
	Coverage Settings 2-2
	Basic Coverage Settings 2-2
	Advanced Coverage Settings 2-14
3	<hr/> Classes

Functions

allNames

Class: `cv.cvdatagroup`

Package: `cv`

Get names of `cvdata` objects in `cv.cvdatagroup` object

Syntax

```
names = allNames(cvdg)
names = allNames(cvdg, simMode)
```

Description

`names = allNames(cvdg)` returns the `cvdata` object names in the `cv.cvdatagroup` object `cvdg`.

`names = allNames(cvdg, simMode)` returns the `cvdata` object names that have the simulation mode `simMode`.

Input Arguments

cvdg — Coverage data group

`cv.cvdatagroup` object

Coverage data group, specified as a `cv.cvdatagroup` object.

Data Types: `cv.cvdatagroup`

simMode — Simulation mode

"Normal" | "SIL" | "PIL" | "ModelRefSIL" | "ModelRefPIL" | "ModelRefTopSIL" | "ModelRefTopPIL"

Simulation mode that corresponds to one or more `cvdata` objects in the `cv.cvdatagroup` object, specified as one of the following:

Object Specification	Description
"Normal"	Model in normal simulation mode.
"SIL" or "PIL"	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
"ModelRefSIL" or "ModelRefPIL"	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
"ModelRefTopSIL" or "ModelRefTopPIL"	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to the top model.

If the function does not find a match, it returns an empty array. If the function finds multiple matches, it returns a cell array.

Data Types: `char` | `string`

Output Arguments

names — Coverage data object names

cell array

Coverage data object names, returned as a cell array of character arrays. `names` contains the model, subsystem, or external file names associated with the `cvdata` objects contained in `cvdg`. The object names refer to the name of the top-level model object that you analyzed for coverage.

Examples

Get Coverage Data from `cvdatagroup` Objects

This example shows how to retrieve a specified coverage data object, all coverage data objects, or all coverage data object names from a `cv.cvdatagroup` object.

Load the example model.

```
modelName = 'slvndemo_eml_model_coverage_demo';
load_system(modelName);
```

Use the `Simulink.SimulationInput` class to set up the simulation scenario with coverage enabled.

```
simIn = Simulink.SimulationInput(modelName);
simIn = setModelParameter(simIn, 'CovEnable', 'on');
simIn = setModelParameter(simIn, 'CovMetricStructuralLevel', 'MCDC');
simIn = setModelParameter(simIn, 'CovSaveSingleToWorkspaceVar', 'on');
simIn = setModelParameter(simIn, 'CovSaveName', 'covData');
simIn = setModelParameter(simIn, 'CovSaveOutputData', 'off');
```

Simulate the model by passing the `SimulationInput` object to the `sim` function, and then retrieve the coverage data from the `SimulationOutput` object.

```
simOut = sim(simIn);
covData = simOut.covData
```

```
covData = ... cv.cvdatagroup
```

```
slcoverageExternalFile (simulation mode: Normal)
slvndemo_eml_model_coverage_demo (simulation mode: Normal)
```

The example model contains a MATLAB® Function block that calls an external MATLAB function. Because Simulink Coverage returns the coverage data for the MATLAB function in a separate `cvdata` object, `sim` returns a `cv.cvdatagroup` object that contains the coverage results for both the model and the MATLAB function.

To determine the name associated with each `cvdata` object inside the `cv.cvdatagroup`, use the class method `allNames`.

```
covDataNames = allNames(covData)
```

```
covDataNames =  
  
    2x1 cell array  
  
    {'slcoverageExternalFile'  
    {'slvndemo_eml_model_coverage_demo'}}
```

The `cv.cvdatabroup` contains the coverage results for the model as well as the MATLAB function.

To retrieve the coverage data for the model, use the `get` class method.

```
modelCovData = get(covData,modelName)
```

```
modelCovData = ... cvdata  
    version: (R2022b)  
    id: 1216  
    type: TEST_DATA  
    test: cvtest object  
    rootID: 1218  
    checksum: [1x1 struct]  
    modelinfo: [1x1 struct]  
    startTime: 31-Aug-2022 08:04:40  
    stopTime: 31-Aug-2022 08:04:40  
    intervalStartTime: 0  
    intervalStopTime: 0  
    simulationStartTime: 0  
    simulationStopTime: 1  
    filter:  
    simMode: Normal
```

To retrieve coverage data for both the model and the external file, use the `getAll` class method.

```
covDataArray = getAll(covData)
```

```
covDataArray =  
  
    2x1 cell array  
  
    {1x1 cvdata}  
    {1x1 cvdata}
```

Version History

Introduced in R2007b

complexityinfo

Retrieve cyclomatic complexity coverage information from cvdata object

Syntax

```
complexity = complexityinfo(cvdo,modelObject)
complexity = complexityinfo(cvdo,modelObject,simMode)
```

Description

`complexity = complexityinfo(cvdo,modelObject)` returns complexity coverage results from the cvdata object cvdo for the model component modelObject.

`complexity = complexityinfo(cvdo,modelObject,simMode)` returns complexity coverage results from the cvdata object cvdo for the model component modelObject for the simulation mode simMode.

Examples

Retrieve Cyclomatic Complexity Data from Coverage Object

This example shows how to retrieve cyclomatic complexity information for the Gain subsystem of the slvndemo_cv_small_controller model.

Load the slvndemo_cv_small_controller model.

```
modelName = 'slvndemo_cv_small_controller';
load_system(modelName);
```

Create a test specification object and enable decision, condition, and MCDC coverage. Then, simulate the model using cvsim.

```
testObj = cvtest(modelName);
testObj.settings.decision = 1;
testObj.settings.condition = 1;
testObj.settings.mcdc = 1;
covData = cvsim(testObj);
```

Retrieve cyclomatic complexity information for the Gain subsystem.

```
gainPath = [modelName, '/Gain'];
gainComplexity = complexityinfo(covData,gainPath)
```

```
gainComplexity =
```

```
1    0
```

The Gain subsystem itself does not record cyclomatic complexity, but the contents of the subsystem do. This can be seen in the results because the total complexity is 1, which includes the subsystem

and all of its descendants. In contrast, the local complexity is 0, indicating that the one point of complexity comes from one of the descendants, in this case a Switch block.

```
switchPath = [modelName, '/Gain/Switch'];
switchComplexity = complexityinfo(covData, switchPath)
```

```
switchComplexity =
    1     1
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a cvdata object.

Data Types: cvdata

modelObject — Model object

character array | string array | Simulink® handle | Stateflow® ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
BlockPath	Full path to a model or block
BlockHandle	Handle to a model or block
s1Obj	Handle to a Simulink API object
sfID	Stateflow ID
sfObj	Handle to a Stateflow API object from a singly instantiated Stateflow chart
{BlockPath, sfID}	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file

Object Specification	Description
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

simMode – Simulation mode

character array | string array

Simulation mode during coverage analysis, specified as one of the following:

Object Specification	Description
'Normal'	Model in normal simulation mode.
'SIL' (or 'PIL')	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefSIL' (or 'ModelRefPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefTopSIL' (or 'ModelRefTopPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to top model.

Data Types: char | string

Output Arguments

complexity – Cyclomatic complexity

scalar

Cyclomatic complexity, returned as a two-element array of the form [total_complexity, local_complexity] if cvdo contains cyclomatic complexity coverage results, or an empty array if it does not.

<code>total_complexity</code>	Cyclomatic complexity coverage for <code>modelObject</code> and its descendants (if any)
<code>local_complexity</code>	Cyclomatic complexity coverage for <code>modelObject</code>

If `modelObject` has variable-size signals, `complexity` also contains the variable complexity.

Data Types: `double`

Alternatives

Use the coverage settings to collect and display cyclomatic complexity coverage results in the coverage report:

- 1 Open the model.
- 2 In the Simulink Editor, select **Model Settings** on the **Modeling** tab.
- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **MCDC** as the structural coverage level.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model.
- 7 In the docked **Coverage Details** pane, the coverage report shows the cyclomatic complexity for the model as well as each model object.

Version History

Introduced in R2011a

See Also

`conditioninfo` | `decisioninfo` | `cvsim` | `getCoverageInfo` | `mcdcinfo` | `sigrangeinfo` | `sigsizeinfo` | `tableinfo` | `executioninfo` | `relationalboundaryinfo` | `overflowsaturationinfo`

Topics

"Cyclomatic Complexity"

conditioninfo

Retrieve condition coverage information from cvdata object

Syntax

```
covInfo = conditioninfo(cvdo,modelObject)
covInfo = conditioninfo(cvdo,modelObject,simMode)
covInfo = conditioninfo(cvdo,modelObject,ignore_descendants)
[covInfo,description] = conditioninfo(cvdo,modelObject)
```

Description

`covInfo = conditioninfo(cvdo,modelObject)` returns the condition coverage results from the cvdata object `cvdo` for the model component specified by `modelObject`.

`covInfo = conditioninfo(cvdo,modelObject,simMode)` returns the condition coverage results from the cvdata object `cvdo` for the simulation mode `simMode`.

`covInfo = conditioninfo(cvdo,modelObject,ignore_descendants)` returns the condition coverage results for `modelObject`, including or ignoring descendant objects based on the value of `ignore_descendants`.

`[covInfo,description] = conditioninfo(cvdo,modelObject)` returns the condition coverage results and textual descriptions for each condition in `modelObject`.

Examples

View Condition Coverage Data

This example shows how to view condition coverage for a block in your model.

Load the model.

```
modelName = 'slvndemo_cv_small_controller';
load_system(modelName);
```

Configure the coverage settings for the model by using a `Simulink.SimulationInput` object.

```
simIn = Simulink.SimulationInput(modelName);
simIn = simIn.setModelParameter('CovEnable','on');
simIn = simIn.setModelParameter('CovMetricStructuralLevel','MCDC');
simIn = simIn.setModelParameter('CovSaveSingleToWorkspaceVar','on');
simIn = simIn.setModelParameter('CovSaveName','covData');
```

Simulate the model by passing `simIn` as the input to `sim`.

```
simOut = sim(simIn);
covData = simOut.covData;
```

View the condition coverage results for the Logic block in the Gain subsystem by calling `conditioninfo` with the block path.

```
condCov = conditioninfo(covData,[modelName, '/Gain/Logic'])
```

```
condCov =
     2     4
```

`conditioninfo` returns an array with two scalars. The first value is the number of satisfied condition outcomes, and the second value is the number of total condition outcomes. Use these to determine the percentage of satisfied condition outcomes for the Logic block.

```
percentCondCov = 100 * condCov(1) / condCov(2)
```

```
percentCondCov =
     50
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a `cvdata` object.

Data Types: `cvdata`

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
<code>BlockPath</code>	Full path to a model or block
<code>BlockHandle</code>	Handle to a model or block
<code>slObj</code>	Handle to a Simulink API object
<code>sfID</code>	Stateflow ID
<code>sfObj</code>	Handle to a Stateflow API object from a singly instantiated Stateflow chart
<code>{BlockPath, sfID}</code>	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
<code>{BlockPath, sfObj}</code>	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
<code>{BlockHandle, sfID}</code>	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

simMode — Simulation mode

character array | string array

Simulation mode during coverage analysis, specified as one of the following:

Object Specification	Description
'Normal'	Model in normal simulation mode.
'SIL' (or 'PIL')	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefSIL' (or 'ModelRefPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefTopSIL' (or 'ModelRefTopPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to top model.

Data Types: char | string

ignore_descendants — Whether to ignore descendants in coverage results

0 (default) | 1

Whether to ignore descendants in coverage results, specified as 0 or 1, where:

- 0 includes coverage results of descendant objects.
- 1 ignores coverage results of descendant objects.

Data Types: `single` | `double`

Output Arguments

covInfo — Coverage information

scalar

Coverage information, returned as a two-element array of the form `[covered_outcomes, total_outcomes]` if `cvdo` contains condition coverage data, or an empty array if it does not.

<code>covered_outcomes</code>	Number of condition outcomes satisfied for <code>modelObject</code>
<code>total_outcomes</code>	Total number of condition outcomes for <code>modelObject</code>

Data Types: `double`

description — Condition coverage description

structure

Condition coverage description, returned as a structure with the following fields:

isFiltered — Block exclusion flag

`0` | `1`

Block exclusion flag, returned as `1` if the block is excluded and `0` if it is not.

Data Types:

filterRationale — Block coverage filter rationale

character array

Block coverage filter rationale, returned as a character array.

Data Types: `char`

justifiedCoverage — Number of justified coverage objective outcomes

scalar

Number of justified coverage objective outcomes, returned as a scalar double.

Data Types: `double`

isJustified — Block justification flag

`0` | `1`

Block justification flag, returned as `1` if the block is justified or `0` if it is not.

Data Types: `double`

condition — Information for individual condition outcomes

structure

Information for individual condition outcomes, returned as a structure with the following fields:

isFiltered – Condition exclusion flag

0 | 1

Condition exclusion flag, returned as 1 if the condition is excluded or 0 if it is not.

Data Types: double

isJustified – Condition justification flag

0 | 1

Condition justification flag, returned as 1 if the condition is justified or 0 if it is not.

Data Types: double

filterRationale – Coverage filter rationale

character array

Coverage filter rationale, returned as a character array.

Data Types: char

text – Description of condition

character array

Description of the condition, returned as a character array.

Data Types: char

trueCnts – Number of time steps condition is true

scalar

Number of time steps the condition is true, returned as a scalar.

Data Types: double

falseCnts – Number of time steps condition is false

scalar

Number of time steps the condition is false, returned as a scalar.

Data Types: double

trueOutcomeFilter – Coverage filter information for true condition outcome

structure array

Coverage filter information for the true condition outcome, returned as a structure array with the following fields:

isFiltered	Filter flag for the condition outcome, returned as 1 if the outcome is filtered or 0 if it is not.
isJustified	Justification flag for the condition outcome, returned as 1 if the outcome is justified or 0 if it is not.
filterRationale	The filter rationale, returned as a character array.

Data Types: struct

falseOutcomeFilter – Coverage filter information for false condition outcome

structure array

Coverage filter information for the false condition outcome, returned as a structure array with the following fields:

<code>isFiltered</code>	Filter flag for the condition outcome, returned as 1 if the outcome is filtered or 0 if it is not.
<code>isJustified</code>	Justification flag for the condition outcome, returned as 1 if the outcome is justified or 0 if it is not.
<code>filterRationale</code>	The filter rationale, returned as a character array.

Data Types: struct

trueExecutedIn – Aggregated coverage test case traceability information

structure array | []

Aggregated coverage test case traceability information, returned as a structure array. If your coverage data does not contain aggregated results from multiple simulations, `trueExecutedIn` is an empty array. If your coverage data contains aggregated results, `trueExecutedIn` indicates which test runs executed the true condition outcome and has the following fields:

<code>uniqueId</code>	Unique identifier for the <code>cvdata</code> object created by the test case that executed this condition outcome, returned as a character array.
<code>analyzedModel</code>	The name of the model analyzed, returned as a character array.
<code>description</code>	The test case description, returned as a character array.
<code>date</code>	The date and time of the simulation that created the <code>cvdata</code> object, returned as a character array.
<code>traceLabel</code>	The short name of the test case, returned as a character array.
<code>testRunInfo</code>	Test details, returned as a structure array.
<code>testRunInfo.runid</code>	The identifier of the run that generated the coverage result, returned as a scalar double.
<code>testRunInfo.runName</code>	The name of the test case that generated the coverage result, returned as a character array.
<code>testRunInfo.testId</code>	Identifying data for the test case that generated the coverage result, returned as a structure array.
<code>testRunInfo.testId.uuid</code>	The unique identifier for the test case that generated the coverage result, returned as a character array.

<code>testRunInfo.testId.contextType</code>	The test context in which the coverage result was obtained, returned as one of these values: 'RE' for the Coverage Results Explorer 'ST' for the Test Manager in Simulink Test™
---------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Data Types: struct

falseExecutedIn — Aggregated coverage test case traceability information

structure array | []

Aggregated coverage test case traceability information, returned as a structure array. If your coverage data does not contain aggregated results from multiple simulations, `falseExecutedIn` is an empty array. If your coverage data contains aggregated results, `falseExecutedIn` indicates which test runs executed the `false` condition outcome and has the following fields:

<code>uniqueId</code>	Unique identifier for the <code>cvdata</code> object created by the test case that executed this condition outcome, returned as a character array.
<code>analyzedModel</code>	The name of the model analyzed, returned as a character array.
<code>description</code>	The test case description, returned as a character array.
<code>date</code>	The date and time of the simulation that created the <code>cvdata</code> object, returned as a character array.
<code>traceLabel</code>	The short name of the test case, returned as a character array.
<code>testRunInfo</code>	Test details, returned as a structure array.
<code>testRunInfo.runid</code>	The identifier of the run that generated the coverage result, returned as a scalar double.
<code>testRunInfo.runName</code>	The name of the test case that generated the coverage result, returned as a character array.
<code>testRunInfo.testId</code>	Identifying data for the test case that generated the coverage result, returned as a structure array.
<code>testRunInfo.testId.uuid</code>	The unique identifier for the test case that generated the coverage result, returned as a character array.
<code>testRunInfo.testId.contextType</code>	The test context in which the coverage result was obtained, returned as one of these values: 'RE' for the Coverage Results Explorer 'ST' for the Test Manager in Simulink Test

Data Types: struct

Data Types: struct

Data Types: `struct`

Alternatives

You can also collect condition coverage for a model in the Simulink Editor. Set the model configuration parameters and run the model:

- 1 Open the model for which you want to collect condition coverage.
- 2 In the Simulink Editor, in the **Modeling** tab, select **Model Settings**.
- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **Condition Decision** as the structural coverage level.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model by clicking **Run**. Review the results.

Version History

Introduced in R2006b

See Also

`complexityinfo` | `cvsim` | `decisioninfo` | `getCoverageInfo` | `mcdcinfo` | `overflowsaturationinfo` | `sigrangeinfo` | `sigsizeinfo` | `tableinfo` | `executioninfo` | `relationalboundaryinfo`

Topics

“Condition Coverage (CC)”

cv.cvdatagroup class

Package: cv

Collection of cvdata objects

Description

A `cv.cvdatagroup` object contains one or more `cvdata` objects. Each `cvdata` object contains coverage results for a model in the model hierarchy.

Simulink Coverage™ creates a `cvdatagroup` object when you simulate a model containing model references when coverage is enabled, or if your model uses external code files and you selected external files for coverage analysis. Use the `get` and `getAll` class methods to retrieve coverage data for specific models in your model reference hierarchy. Use the `allNames` method to retrieve the `cvdata` object names to use with the `get` class method.

The `cv.cvdatagroup` class is a `handle` class.

Creation

Description

`cvdg = cv.cvdatagroup(cvdo1, cvdo2, ...)` creates a `cvdatagroup` object that contains the specified `cvdata` objects.

Input Arguments

cvdo — Coverage data

`cvdata` object

Coverage data, specified as one or more `cvdata` objects.

Data Types: `cvdata`

Properties

name — Object name

' ' (default) | character array

Object name, specified as a character array.

Example: `cvdg.name = 'myDataGroup';`

Attributes:

<code>GetAccess</code>	<code>public</code>
<code>SetAccess</code>	<code>public</code>

Data Types: `char`

Methods

Public Methods

<code>allNames</code>	Get names of <code>cvdata</code> objects in <code>cv.cvdatagroup</code> object
<code>allSimulationModes</code>	Get names of all simulation modes associated with <code>cvdata</code> objects in <code>cv.cvdatagroup</code>
<code>get</code>	Get specified <code>cvdata</code> object in <code>cvdatagroup</code>
<code>getAll</code>	Get all <code>cvdata</code> objects in <code>cvdatagroup</code> object

Examples

Get Coverage Data from `cvdatagroup` Objects

This example shows how to retrieve a specified coverage data object, all coverage data objects, or all coverage data object names from a `cv.cvdatagroup` object.

Load the example model.

```
modelName = 'slvndemo_eml_model_coverage_demo';  
load_system(modelName);
```

Use the `Simulink.SimulationInput` class to set up the simulation scenario with coverage enabled.

```
simIn = Simulink.SimulationInput(modelName);  
simIn = setModelParameter(simIn, 'CovEnable', 'on');  
simIn = setModelParameter(simIn, 'CovMetricStructuralLevel', 'MDC');  
simIn = setModelParameter(simIn, 'CovSaveSingleToWorkspaceVar', 'on');  
simIn = setModelParameter(simIn, 'CovSaveName', 'covData');  
simIn = setModelParameter(simIn, 'CovSaveOutputData', 'off');
```

Simulate the model by passing the `SimulationInput` object to the `sim` function, and then retrieve the coverage data from the `SimulationOutput` object.

```
simOut = sim(simIn);  
covData = simOut.covData
```

```
covData = ... cv.cvdatagroup
```

```
slcoverageExternalFile (simulation mode: Normal)  
slvndemo_eml_model_coverage_demo (simulation mode: Normal)
```

The example model contains a MATLAB® Function block that calls an external MATLAB function. Because Simulink Coverage returns the coverage data for the MATLAB function in a separate `cvdata` object, `sim` returns a `cv.cvdatagroup` object that contains the coverage results for both the model and the MATLAB function.

To determine the name associated with each `cvdata` object inside the `cv.cvdatagroup`, use the class method `allNames`.

```
covDataNames = allNames(covData)
```

```

covDataNames =
    2x1 cell array
    {'slcoverageExternalFile'      }
    {'slvndemo_eml_model_coverage_demo'}

```

The `cv.cvdatabgroup` contains the coverage results for the model as well as the MATLAB function.

To retrieve the coverage data for the model, use the `get` class method.

```
modelCovData = get(covData,modelName)
```

```

modelCovData = ... cvdata
    version: (R2022b)
    id: 1216
    type: TEST_DATA
    test: cvtest object
    rootID: 1218
    checksum: [1x1 struct]
    modelinfo: [1x1 struct]
    startTime: 31-Aug-2022 08:04:40
    stopTime: 31-Aug-2022 08:04:40
    intervalStartTime: 0
    intervalStopTime: 0
    simulationStartTime: 0
    simulationStopTime: 1
    filter:
    simMode: Normal

```

To retrieve coverage data for both the model and the external file, use the `getAll` class method.

```
covDataArray = getAll(covData)
```

```

covDataArray =
    2x1 cell array
    {1x1 cvdata}
    {1x1 cvdata}

```

Create a cv.cvdatabgroup Object

This example shows how to create a `cvdatabgroup` object using two `cvdata` objects.

Record coverage for `slvndemo_cv_small_controller`.

```

model_1 = 'slvndemo_cv_small_controller';
load_system(model_1)
cvdol = cvsim(model_1);

```

Record coverage for `slvndemo_powerwindow_controller`.

```
model_2 = 'slvndemo_powerwindow_controller';  
load_system(model_2)  
cvdo2 = cvsim(model_2);
```

Create a `cv.cvatagroup` object that contains two `cvdata` objects.

```
cvdg = cv.cvatagroup(cvdo1,cvdo2);
```

Version History

Introduced in R2007b

See Also

`cvsim` | `cvdata` | `sim`

Topics

“Types of Coverage Data”

allSimulationModes

Class: cv.cvdatagroup

Package: cv

Get names of all simulation modes associated with cvdata objects in cv.cvdatagroup

Syntax

```
simModes= allSimulationModes(cvdg)
simModes= allSimulationModes(cvdg, modelName)
```

Description

Get names of all simulation modes associated with cvdata objects in cv.cvdatagroup.

`simModes= allSimulationModes(cvdg)` returns a cell array of character vectors or strings identifying all simulation modes associated with the cvdata objects in `cvdg`, an instantiation of the `cv.cvdatagroup` class.

`simModes= allSimulationModes(cvdg, modelName)` returns a cell array of character vectors or strings identifying all simulation modes associated with the model `modelName` in `cvdg`, an instantiation of the `cv.cvdatagroup` class.

Input Arguments

cvdg — Class instance

object

Instance of class `cv.cvdatagroup`.

modelName — Name of the model

character vector or string

Model with which simulation modes are associated.

Output Arguments

simModes — Simulation modes

cell array of character vectors or strings

All simulation modes associated with `cvdg`. Valid values include the following:

Object Specification	Description
'Normal'	Model in Normal simulation mode.
'SIL' (or 'PIL')	Model in Software-in-the-Loop (SIL) or Processor-in-the-Loop (PIL) simulation mode.

Object Specification	Description
'ModelRefSIL' (or 'ModelRefPIL')	Model reference in Software-in-the-Loop (SIL) or Processor-in-the-Loop (PIL) simulation mode.
'ModelRefTopSIL' (or 'ModelRefTopPIL')	Model reference in Software-in-the-Loop (SIL) or Processor-in-the-Loop (PIL) simulation mode with code interface set to top model.

Examples

Get All Simulation Modes from cvdatagroup

This example shows how to query the simulation modes of the coverage results inside a cvdatagroup object.

Record coverage for slvndemo_cv_small_controller.

```
model_1 = 'slvndemo_cv_small_controller';
load_system(model_1)
cvdo1 = cvsim(model_1);
```

Record coverage for slvndemo_powerwindow_controller.

```
model_2 = 'slvndemo_powerwindow_controller';
load_system(model_2)
cvdo2 = cvsim(model_2);
```

Record coverage for slvndemo_counter.

```
model_3 = 'slvndemo_counter';
load_system(model_3)
cvdo3 = cvsim(model_3);
```

Add the three cvdata objects to a cv.datagroup object.

```
cvdg = cv.datagroup(cvdo1, cvdo2, cvdo3);
```

Get the simulation modes by using allSimulationModes.

```
simModes = allSimulationModes(cvdg)
```

```
simModes =
    1x1 cell array
    {'Normal'}
```

cvexit

Exit coverage environment

Syntax

```
cvexit
```

Description

`cvexit` exits the model coverage environment. Using `cvexit` closes the Coverage Details pane and removes coloring from open models.

Examples

Exit the Coverage Environment

- Call `cvexit` to close the coverage environment

```
cvexit;
```

Version History

Introduced in R2006b

cvhtml

Create HTML coverage report from model coverage objects

Syntax

```
cvhtml(file,cvdo)
cvhtml(file,cvdo1,...,cvdoN)
cvhtml(file,cvdo1,...,cvdoN,options)
cvhtml(file,cvdo,simMode)
```

Description

`cvhtml(file,cvdo)` creates an HTML report of the coverage results in the `cvdata` or `cv.cvdatagroup` object `cvdo` with the file name `file`. The model must be open when you use `cvhtml`.

`cvhtml(file,cvdo1,...,cvdoN)` creates a combined report from several `cvdata` objects. The results from each object appear in a separate column of the HTML report. Each `cvdata` object must correspond to the same root model or subsystem.

`cvhtml(file,cvdo1,...,cvdoN,options)` creates a combined report from several `cvdata` objects using the report options specified by `options`.

`cvhtml(file,cvdo,simMode)` creates an HTML report for the models that have the simulation mode `simMode`.

Examples

Create a Coverage Report

Set your current folder to a writeable directory.

Open your model and collect coverage by using `cvsim`.

```
modelName = 'slvndemo_cv_small_controller';
open_system(modelName);
cvd = cvsim(modelName);
```

Create a coverage report for the model and save the report as `ratelim_coverage.html`.

```
outfile = 'ratelim_coverage.html';
cvhtml(outfile,cvd);
```

Input Arguments

cvdo — Coverage data

`cvdata` object | `cv.cvdatagroup` object

Coverage data, specified as a `cvdata` object or `cv.cvdatagroup` object.

Data Types: `cvdata` | `cv.cvdatagroup`

file — File name of the generated report

character array | string array

File name of the generated report, specified as a character array or string array. Specify the absolute path or relative path and the file name.

options — Report options

character vector | string

Report options, specified as a character vector or string that consists of an option from the table, an equal sign, and 0 or 1.

- To enable an option, use 1.

Example: `"-hTR=1"`

- To disable an option, use 0.

Example: `"-sRT=0"`

- To specify multiple report options, list the options in a single character vector or string separated by commas or spaces.

Example: `"-hTR=1 -bRG=0 -scm=0"`

Option	Description	Default
-sRT	Show report	on
-sVT	Web view mode	off
-aTS	Include each test in the model summary	on
-bRG	Produce bar graphs in the model summary	on
-bTC	Use two-color bar graphs	on
-hTR	Display hit/count ratio in the model summary	off
-xEM	Exclude execution metric details from report	off
-nFC	Exclude fully covered model objects from report	off
-nFD	Exclude fully covered model object details from report	on
-scm	Include cyclomatic complexity numbers in summary	on
-bcm	Include cyclomatic complexity numbers in block details	on
-xEv	Filter Stateflow events from report	off

Data Types: `char` | `string`

simMode — Simulation mode

"Normal" | "SIL" | "PIL" | "ModelRefSIL" | "ModelRefPIL" | "ModelRefTopSIL" | "ModelRefTopPIL"

Simulation mode, specified as one of these values:

Object Specification	Description
"Normal"	Model in Normal simulation mode
"SIL" (or "PIL")	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode
"ModelRefSIL" (or "ModelRefPIL")	Model reference in SIL or PIL simulation mode
"ModelRefTopSIL" (or "ModelRefTopPIL")	Model reference in SIL or PIL simulation mode with code interface set to top model

Alternatives

Use the Simulink Editor to generate a coverage report when you simulate the model:

- 1 Open the model for which you want a model coverage report.
- 2 In the Simulink Editor, in the **Modeling** tab, select **Model Settings**.
- 3 In the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Click **OK**.
- 5 Click **Run (Coverage)** to simulate the model. When the simulation completes, the coverage report opens in the **Coverage Details** pane.

Version History

Introduced before R2006a

See Also

cv.cvdatagroup | cvmodelview | cvsim

Topics

"Automating Model Coverage Tasks"

cvload

Load coverage tests and stored results into memory

Syntax

```
[covSettings,covData] = cvload(fileName)
[covSettings,covData] = cvload(fileName,restoreTotal)
```

Description

`[covSettings,covData] = cvload(fileName)` loads the tests and data stored in the specified file.

`[covSettings,covData] = cvload(fileName,restoreTotal)` restores or clears the cumulative results from prior runs depending on the value of `restoreTotal`.

Note When using the `cvload` command:

- If a model with the same name exists in the coverage database, `cvload` only loads the compatible results that reference the existing model to prevent duplication.
 - If the Simulink models referenced from the file are open, but do not exist in the coverage database, `cvload` resolves the links to the existing models.
 - When you are loading several files that reference the same model, `cvload` only loads the results that are consistent with the earlier files.
 - Starting in R2020b, you can load coverage data created in R2017b or later. You can aggregate coverage data from two or more `cvdata` objects for the same model if the `dbVersion` properties match.
-

Examples

Load Coverage Data and Preserve Cumulative Data

Load the file `myCovData.cvt` while maintaining cumulative coverage results.

```
[covSettings,covData] = cvload('myCovData',1);
```

Input Arguments

fileName — Name of coverage data file

character array | string array

Name of coverage data file, specified as a character array or string array. `fileName` must be a coverage data file with the `.cvt` extension. You do not need to include the extension in `fileName`.

Example: `'myCoverageData'`

Data Types: char | string

restoreTotal — Cumulative data restoration setting

0 (default) | 1

Cumulative data restoration setting, specified as 1 or 0. If `restoreTotal` is set to 1, `cvload` restores the cumulative results from prior runs. If `restoreTotal` is set to 0 or unspecified, `cvload` clears the cumulative results.

Data Types: double

Output Arguments

covSettings — Coverage settings

cell array

Coverage settings, returned as a cell array of `cvtest` objects. The coverage settings are returned as `cvtest` objects even if you did not use `cvtest` and `cvsim` to collect the original data.

Data Types: cell

covData — Coverage data

cell array

Coverage data, returned as a cell array of `cvdata` objects. `covData` has the same size as `covSettings`, but if a settings entry has no results, `covData` can contain empty elements.

Alternatives

You can load existing coverage data in the Coverage Results window:

- 1 Open the model for which you want to load existing coverage data.
- 2 In the **Apps** tab, select **Coverage Analyzer**.
- 3 In the **Coverage** tab, select **Results Explorer**.
- 4 In the Coverage Results window, right click **Data Repository** and select **Load coverage data**.
- 5 Select the coverage data file that you want to load.

Version History

Introduced before R2006a

Load and view coverage data from previous releases

You can load and view coverage data from previous releases as far back as R2017b.

After you import coverage data from a previous release, you can extract information using the API. You can aggregate coverage data that have matching release versions.

See Also

`cvdata` | `cvsave` | `cvtest`

Topics

“Programmatically Retrieve Coverage Details from Results”

cvmodelview

Display model coverage results with model highlighting

Syntax

```
cvmodelview(cvdo)
cvmodelview(cvdo, simMode)
```

Description

`cvmodelview(cvdo)` highlights the model with coverage results from the `cvdata` object `cvdo`.

`cvmodelview(cvdo, simMode)` highlights the model with coverage results for the specified simulation mode.

Examples

Highlight Coverage Results in a Model

Use `cvsim` to simulate a model and return a `cvdata` object.

```
covData = cvsim(modelName);
```

Use `cvmodelview` with the `cvdata` object to display the coverage results visually by highlighting the model.

```
cvmodelview(covData)
```

Input Arguments

cvdo — Coverage data

`cvdata` object | `cv.cvdatagroup` object

Coverage data, specified as a `cvdata` object or `cv.cvdatagroup` object.

simMode — Simulation mode

"Normal" | "SIL" | "PIL" | "ModelRefSIL" | "ModelRefPIL" | "ModelRefTopSIL" | "ModelRefTopPIL"

Simulation mode, specified as one of these values:

Object Specification	Description
"Normal"	Model in Normal simulation mode
"SIL" (or "PIL")	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode
"ModelRefSIL" (or "ModelRefPIL")	Model reference in SIL or PIL simulation mode

Object Specification	Description
"ModelRefTopSIL" (or "ModelRefTopPIL")	Model reference in SIL or PIL simulation mode with code interface set to top model

Alternatives

Use the coverage settings to enable coverage highlighting:

- 1 Open the model.
- 2 On the **Modeling** tab, select **Model Settings**.
- 3 In the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Click **OK**.
- 5 Click **Run (Coverage)** to simulate the model. When the simulation completes, the model displays with coverage highlighting enabled.

Version History

Introduced in R2006b

See Also

cvhtml | cvsim

Topics

"View Coverage Results in Simulink Canvas"

cvresults

Returns active coverage data, clears and loads active coverage data from a file

Syntax

```
[covData,cumulativeCovData] = cvresults(modelName)
cvresults(modelName,'clear')
cvresults(modelName,'load',fileName)
```

Description

[covData,cumulativeCovData] = cvresults(modelName) returns the active single-run coverage data covData and cumulative coverage data cumulativeData.

cvresults(modelName,'clear') clears the active coverage data.

cvresults(modelName,'load',fileName) loads the active coverage data from a .cvt file.

Examples

Retrieve Current Run Coverage Data

- 1 Simulate your model and collect coverage.

```
cvsim(modelName);
```

- 2 Get the current coverage data.

```
[covData,cumulativeCovData] = cvresults(modelName);
```

Input Arguments

modelName — Model name

character array | string array

Model name, specified as a character array or string array.

Data Types: char | string

fileName — Coverage data file name

character array | string array

Coverage data file name, specified as a character array or string array.

Data Types: char | string

Output Arguments

covData — Coverage data

cvdata object

Coverage data, returned as a `cvdata` object.

Data Types: `cvdata`

`cumulativeCovData` — Cumulative coverage data

`cvdata` object

Cumulative coverage data, returned as a `cvdata` object.

Data Types: `cvdata`

Version History

Introduced in R2016a

See Also

cvsave

Save coverage settings and results to file

Syntax

```
cvsave(fileName,model)
cvsave(fileName,covData)
cvsave(fileName,covSettings1,...,covSettingsN)
```

Description

`cvsave(fileName,model)` saves all the coverage settings and results related to `model` in the file `fileName`.

`cvsave(fileName,covData)` saves all the coverage settings and results contained in the `cvdata` object `covData`.

`cvsave(fileName,covSettings1,...,covSettingsN)` saves multiple `cvtest` objects and information about any referenced models.

Examples

Save Coverage Results

This example shows how to save coverage data to a file.

Start by loading the model into memory.

```
modelName = 'slvndemo_cv_small_controller';
load_system(modelName);
```

Simulate the model with the coverage settings that are saved with the model.

```
covData = cvsim(modelName);
```

Save a coverage data file called `coverage_data`, containing the coverage data in the `cvdata` object `covData`.

```
cvsave('coverage_data',covData);
```

Save Multiple Coverage Data Objects to a File

This example shows how to save more than one coverage data object to a single coverage data file.

Load the Model

Load the model into memory.

```
modelName = 'slvndemo_ratelim_harness';
load_system(modelName);
```

Set Model Parameters for Coverage

Create a `Simulink.SimulationInput` object to set coverage parameters.

```
covSet = Simulink.SimulationInput(modelName);
covSet = covSet.setModelParameter('CovEnable','on');
covSet = covSet.setModelParameter('CovMetricStructuralLevel','MCDC');
covSet = covSet.setModelParameter('CovScope','Subsystem');
covSet = covSet.setModelParameter('CovPath','/Adjustable Rate Limiter');
covSet = covSet.setModelParameter('CovSaveSingleToWorkspaceVar','on');
```

Simulate the Model to Collect Coverage Data

Load the data files and then simulate the model to collect two sets of coverage data.

```
load within_lim.mat
covSet = covSet.setModelParameter('CovSaveName','covData1');
simOut1 = sim(covSet);
```

Simulate the model a second time using the second data file.

```
load rising_gain.mat
covSet = covSet.setModelParameter('CovSaveName','covData2');
simOut2 = sim(covSet);
```

Save the Coverage Data to a File

Save the results in a cell array.

```
cov_results{1} = covData1;
cov_results{2} = covData2
```

```
cov_results =
    1x2 cell array
    {1x1 cvdata}    {1x1 cvdata}
```

Save the results to a file.

```
cvsave('ratelim_testdata',cov_results{:});
```

Input Arguments

fileName — Name of coverage data file

character array | string array

Name of coverage data file, specified as a character array or a string array. `cvsave` appends the extension `.cvt` to the name of the file when saving it.

Example: 'myCoverageDataFile'

Data Types: char | string

model — Simulink model that has coverage data

character array | string array

Simulink model that has coverage data, specified as a character array or a string array. `model` can be the name of a model or a handle to a model.

Example: 'mySimulinkModel'

Data Types: char | string

covSettings — Coverage settings

cvtest object | cell array

Coverage settings, specified as a `cvtest` object, or a cell array of `cvtest` objects.

Data Types: cvtest | cell

covData — Coverage data

cvdata object | cell array

Coverage data, specified as a `cvdata` object or a cell array of `cvdata` objects.

Data Types: cvdata | cell

Alternatives

You can save coverage results to a MATLAB workspace variable when you run your model in Simulink:

- 1 Open the model for which you want to save cumulative coverage results.
- 2 On the **Modeling tab**, select **Model Settings**.
- 3 In the left pane of the Configuration Parameters dialog box, select **Coverage**.
- 4 Select **Enable coverage analysis**.
- 5 In the **Results** section, select **Save last run in workspace variable**.
- 6 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 7 Simulate the model by clicking the **Run** button and review the results.

Version History

Introduced before R2006a

See Also

`cvload` | `cvdata` | `cv.cvdatagroup` | `cvtest`

cvsim

Simulate and return model coverage results for test objects

Syntax

```
cvdo = cvsim(modelName)
cvdo = cvsim(testObj)
[cvdo,simOut] = cvsim(__,Name,Value)
[cvdo,simOut] = cvsim(testObj,paramStruct)
[cvdo1,...,cvdoN] = cvsim(testObj1,...,testObjN)
```

Description

`cvdo = cvsim(modelName)` simulates the model and returns the coverage results in the `cvdata` object, `cvdo`. When called using `modelName`, `cvsim` uses the coverage metric settings specified in the model configuration parameters.

Note `cvsim` will record coverage even if coverage is not enabled in the model configuration parameters.

`cvdo = cvsim(testObj)` simulates the model and returns the coverage results for the `cvtest` object, `testObj`.

Note The coverage metric settings specified in `testObj` override coverage metric settings specified in the model configuration parameters.

`[cvdo,simOut] = cvsim(__,Name,Value)` specifies the model parameters, simulates the model, and returns the coverage results in the `cvdata` object, `cvdo`, and the simulation outputs in the `Simulink.SimulationOutput` object, `simOut`.

`[cvdo,simOut] = cvsim(testObj,paramStruct)` sets the model parameters specified in a structure `paramStruct`.

`[cvdo1,...,cvdoN] = cvsim(testObj1,...,testObjN)` simulates the model for `N` test objects, and returns the coverage results for each object.

Examples

Record Coverage Data Using `cvsim`

This example shows how to use `cvsim` with a `cvtest` object input and a structure of model parameters.

Load the `slvnvdemo_cv_small_controller` example model.

```
modelName = 'slvndemo_cv_small_controller';
load_system(modelName)
```

Create a `cvtest` object and turn on decision coverage.

```
testObj = cvtest(modelName);
testObj.settings.decision = 1;
```

Create a structure that defines the following model parameters:

- Set the absolute tolerance, `AbsTol`, to `1e-5`.
- Enable the simulation to save states to the workspace with `SaveState`.
- Declare the variable name to save the state information in with `SaveStateName`.
- Enable Simulink® to save simulation output data to the workspace with `SaveOutput`.
- Declare the variable name in which to store the simulation output data with `OutputSaveName`.

```
paramStruct.AbsTol = '1e-5';
paramStruct.SaveState = 'on';
paramStruct.StateSaveName = 'xoutNew';
paramStruct.SaveOutput = 'on';
paramStruct.OutputSaveName = 'youtNew';
```

Simulate the model with `cvsim` and generate a coverage report with `cvhtml`.

```
[covData,simOut] = cvsim(testObj,paramStruct);
cvhtml('CoverageReport.html',covData,'-sRT=0');
```

Input Arguments

`modelName` — Name of Simulink model

character array | string array

Name of a Simulink Model, specified as a character array or string array. `cvsim` simulates the model with the current coverage settings.

Data Types: `char` | `string`

`testObj` — Coverage test settings

`cvtest` object

Coverage test settings, specified as a `cvtest` object. `cvsim` collects coverage using the settings specified in `testObj`.

The coverage metric settings specified in `testObj` override the coverage metric settings specified in the model configuration parameters. For example, if the **Structural coverage level** parameter in your model is set to **Modified Condition Decision Coverage (MCDC)**, but your `testObj.settings.mcdc` property is `0`, then `covData = cvsim(testObj)` will *not* record MCDC coverage.

Data Types: `cvtest`

`paramStruct` — Model parameters

structure

Model parameters, specified as a structure. You can specify model parameters as a structure and use the structure instead of name-value pair arguments to set multiple parameters.

`paramStruct` fields are the names of model parameters and the values are the corresponding parameter values.

Example: `paramStruct.AbsTol = '1e-5';`

Data Types: `struct`

Name-Value Pair Arguments

Specify optional pairs of arguments as `Name1=Value1, ..., NameN=ValueN`, where `Name` is the argument name and `Value` is the corresponding value. Name-value arguments must appear after other arguments, but the order of the pairs does not matter.

Before R2021a, use commas to separate each name and value, and enclose Name in quotes.

Example: `[cvdo, simOut] = cvsim(testObj, 'AbsTol', '1e-5');` specifies that the model is simulated using an absolute tolerance of `1e-5` with coverage settings specified in `testObj`.

`cvsim` supports all model parameters that are supported by `sim`, except for parameters in the **Coverage** pane of the Configuration Parameters window.

ModelParameter — Model parameter and value

character array | string array

Name of a model parameter, specified as a character array or string array. The value of the parameter is specified as the next argument.

Data Types: `char` | `string`

Output Arguments

cvdo — Coverage data object

`cvdata`

`cvdo`, returned as a `cvdata` object. When recording coverage for multiple models in a hierarchy, `cvdo` is a `cv.cvdatagroup` object instead. `cvdo` contains the coverage data from the simulated system.

See `cvdata` for the object structure.

simOut — Simulation data object

`Simulink.SimulationOutput`

`simOut`, returned as a `Simulink.SimulationOutput` object.

Version History

Introduced before R2006a

See Also

`cvtest` | `cvdata` | `cv.cvdatagroup` | `sim` | `cvhtml`

cvtest

Create model coverage test specification object

Description

Use `cvtest` to create a test specification object that stores model coverage settings. Pass the `cvtest` object to the `cvsim` function to execute coverage analysis based on your settings.

Creation

Syntax

```
cvto = cvtest(root)
cvto = cvtest(root, label)
cvto = cvtest(root, label, setupCmd)
```

Description

`cvto = cvtest(root)` creates a `cvtest` object with default coverage settings. `root` can be the name of a model or the handle to a model. `root` can also be the name or handle to a subsystem within the model, in which case only the specified subsystem and its descendents are analyzed for coverage.

`cvto = cvtest(root, label)` creates a `cvtest` object with the designated label.

`cvto = cvtest(root, label, setupCmd)` creates a `cvtest` object with the setup command `setupCmd`. The setup command is executed in the base MATLAB® workspace before running coverage analysis.

Note Coverage metric settings specified in the `cvtest` object override coverage metric settings set in the model configuration parameters.

Input Arguments

root — Name or handle of model or path to subsystem

character array | string array

Model name or handle, or path to a subsystem, specified as a character array or string array.

Properties

id — Internal Model ID

scalar

This property is read-only.

Internal model ID, returned as a scalar.

modelcov — Internal Coverage Configuration ID

scalar

This property is read-only.

Internal coverage configuration ID, returned as a scalar.

rootPath — Name or handle of system to analyze

character array | string array

This property is read-only.

Name of the system you specified to analyze, returned as a character array or string array.

Data Types: char | string

label — Test label

character array | string array

Test label, specified as a character array or a string array. This label appears in the coverage report as the test name.

Data Types: char | string

setupCmd — Command executed in base MATLAB workspace before simulation

character array | string array

Command executed in base MATLAB workspace before simulation, specified as a character array or string array.

The setup command is executed before each simulation.

Data Types: char | string

settings — Coverage settings

structure

Types of coverage to collect, specified as a structure.

`settings` includes the following fields:

Property	Description	Values
<code>settings.decision</code>	Enable decision coverage data.	1 (default) 0
<code>settings.condition</code>	Enable condition coverage data.	1 0 (default)
<code>settings.mcdc</code>	Enable modified condition decision coverage (MCDC) data. If <code>settings.mcdc</code> is enabled, you can also choose which definition of MCDC to use with the <code>options.mcdcmode</code> property.	1 0 (default)

Property	Description	Values
<code>settings.designverifier</code>	Enable coverage data from Simulink Design Verifier™ blocks.	1 0 (default)
<code>settings.tableExec</code>	Enable coverage data for lookup tables.	1 0 (default)
<code>settings.sigrange</code>	Enable signal range data.	1 0 (default)
<code>settings.sigsize</code>	Enable signal size data.	1 0 (default)
<code>settings.overflowsaturation</code>	Enable saturation on integer overflow coverage data.	1 0 (default)
<code>settings.relationlop</code>	Enable relational boundary coverage data. Use <code>options.covBoundaryRelTol</code> and <code>options.covBoundaryAbsTol</code> to specify tolerances for this type of coverage. For more information, see “Relational Boundary Coverage”	1 0 (default)

options — Advanced coverage options

structure

Advanced coverage options, specified as a structure.

`options` includes the following fields:

Property	Description	Values
<code>options.covBoundaryRelTol</code>	Relative tolerance for relational boundary coverage. For more information, see “Relational Boundary Coverage”.	0.01 (default) scalar
<code>options.CovBoundaryAbsTol</code>	Absolute tolerance for relational boundary coverage. For more information, see “Relational Boundary Coverage”.	1e-5 (default) scalar

Property	Description	Values
options.useTimeInterval	<p>Whether to restrict model coverage recording to a specified simulation time interval.</p> <p>Use options.intervalStartTime and options.intervalStopTime to specify the time interval.</p> <p>For more information, see “Specify Coverage Options”</p>	1 0 (default)
options.intervalStartTime	<p>When to start recording coverage.</p> <p>Specify this property if options.useTimeInterval is enabled.</p>	0 (default) scalar
options.intervalStopTime	<p>When to stop recording coverage.</p> <p>Specify this property if options.useTimeInterval is enabled.</p>	0 (default) scalar

Property	Description	Values
<code>options.forceBlockReduction</code>	<p>Whether to record coverage for blocks flagged with the Block Reduction parameter.</p> <ul style="list-style-type: none"> 1 (default) — Override the Simulink Block Reduction parameter if it is enabled. Coverage is recorded for every supported block in the model. The value of the configuration parameter Block Reduction is ignored. 0 — Use the value for the configuration parameter Block Reduction. If Block Reduction is enabled, coverage is not recorded for blocks that are effectively removed from the model because of block reduction. For instance, coverage is not recorded for a block that is reduced by dead code elimination. <p>For more information, see “Block reduction”</p>	1 (default) 0
<code>options.mcdcMode</code>	<p>Which MCDC definition to apply to the model, specified as one of the following options:</p> <ul style="list-style-type: none"> 'masking' — Use the masking definition of MCDC coverage. 'unique cause' — Use the unique cause definition of MCDC coverage. <p>For more information, see “Modified Condition and Decision Coverage (MCDC) Definitions in Simulink Coverage”.</p>	'masking' (default) 'unique cause'

filter — Coverage filter structure

Coverage filter, specified as a structure.

`filter` has one field, `filter.fileName`. `filter.fileName` is the name of a coverage filter file to apply to coverage analysis, specified as a character array or string array.

For more information, see “Coverage Filter Rules and Files”

modelRefSettings — Model reference settings

structure (default)

Model reference settings, specified as a structure.

modelRefSettings includes the following fields:

Property	Description	Values
modelRefSettings.enable	Model reference coverage setting, specified as one of the following options: <ul style="list-style-type: none"> 'off' — Disable coverage for all referenced models. 'all' or 'on' — Enable coverage for all supported referenced models. 'filtered' — Enable coverage for all supported referenced models except those listed in the excludedModels field. 	'off' (default) 'on' 'all' 'filtered'
modelRefSettings.excludeTopModel	Whether to exclude the top model from coverage analysis, specified as a numeric or logical 1 (true) or 0 (false).	1 (default) 0
modelRefSettings.excludeModels	Referenced models to exclude from coverage analysis, specified as a single character or string array of comma-separated model names. To use this field, set modelRefSettings.enable to 'filtered'.	char string

emlSettings — Whether to collect coverage for external program files called by MATLAB functions

structure

Whether to collect coverage for external program files called by MATLAB functions in your model, specified as a structure.

emlSettings has one field, emlSettings.enableExternal. Set emlSettings.enableExternal to 1 if you want to collect coverage for external program files called by MATLAB functions, and 0 if you do not want to collect coverage for external program files called by MATLAB functions.

sfcnSettings — Whether to collect coverage for C/C++ S-Function blocks

structure (default)

Whether to collect coverage for C/C++ S-Function blocks in your model, specified as a structure.

`sfcnSettings` has one field, `sfcnSettings.enableSfcn`. Set `sfcnSettings.enableSfcn` to 1 if you want to collect coverage for S-Functions in your model, and 0 if you do not want to collect coverage for S-Functions in your model.

For more information, see S-Function.

Examples

Analyze Coverage Using a `cvtest` Object

This example shows how to run coverage analysis using a `cvtest` object.

Open the `slvndemo_ratelim_harness` model and define the test object using `cvtest`. When you create the `cvtest` object, specify the Adjustable Rate Limiter block as the model object to analyze.

```
load_system('slvndemo_ratelim_harness');
testObj = cvtest(['slvndemo_ratelim_harness', ...
                '/Adjustable Rate Limiter']);
testObj.label = 'Gain within slew limits';
```

Add a setup command to `testObj`. The setup command executes in the base MATLAB workspace before coverage analysis. In this case, the setup command loads data into the workspace that is required for the simulation.

```
testObj.setupCmd = ...
    'load within_lim.mat';
```

To collect decision coverage and saturation on integer overflow coverage, enable the `decision` and `overflowsaturation` properties in `testObj` object by setting the properties to true or 1.

```
testObj.settings.decision = true;
testObj.settings.overflowsaturation = true;
```

Finally, perform the coverage analysis by calling `cvsim` with `testObj`.

```
cvdo = cvsim(testObj);
```

Version History

Introduced before R2006a

See Also

`cvsim` | `cv.cvdatagroup`

Topics

“Automating Model Coverage Tasks”

decisioninfo

Retrieve decision coverage information from cvdata object

Syntax

```
covInfo = decisioninfo(cvdo, modelObject)
covInfo = decisioninfo(cvdo, modelObject, simMode)
covInfo = decisioninfo(cvdo, modelObject, ignore_descendants)
[covInfo, description] = decisioninfo(cvdo, modelObject)
```

Description

`covInfo = decisioninfo(cvdo, modelObject)` returns decision coverage results from the cvdata object `cvdo` for the model component specified by `modelObject`.

`covInfo = decisioninfo(cvdo, modelObject, simMode)` returns decision coverage results from the cvdata object `cvdo` for the model component specified by `modelObject` for the simulation mode `simMode`.

`covInfo = decisioninfo(cvdo, modelObject, ignore_descendants)` returns decision coverage results for `modelObject`, depending on the value of `ignore_descendants`.

`[covInfo, description] = decisioninfo(cvdo, modelObject)` returns decision coverage results and text descriptions of decision points associated with `modelObject`.

Examples

View Decision Coverage Data

This example shows how to view decision coverage data for a block in your model.

Load the model.

```
modelName = 'slvndemo_cv_small_controller';
load_system(modelName);
```

Configure the coverage settings for the model by using a `Simulink.SimulationInput` object.

```
simIn = Simulink.SimulationInput(modelName);
simIn = setModelParameter(simIn, 'CovEnable', 'on');
simIn = setModelParameter(simIn, 'CovMetricStructuralLevel', 'Decision');
simIn = setModelParameter(simIn, 'CovSaveSingleToWorkspaceVar', 'on');
simIn = setModelParameter(simIn, 'CovSaveName', 'covData');
```

Simulate the model by passing `simIn` as the input to `sim`.

```
simOut = sim(simIn);
```

Extract the coverage data as a cvdata object from the `SimulationOutput` object, `simOut`.

```
covData = simOut.covData;
```

View the decision coverage results for the Saturation block by calling `decisioninfo` with the block path.

```
blockPath = [modelName, '/Saturation'];
decisionCov = decisioninfo(covData,blockPath)
```

```
decisionCov =
     3     4
```

`decisioninfo` returns an array with two scalars. The first value is the number of satisfied decision outcomes, and the second value is the number of total decision outcomes. Use these to determine the percentage of satisfied decision outcomes for the Saturation block.

```
percentDecisionCov = 100 * decisionCov(1) / decisionCov(2)
```

```
percentDecisionCov =
    75
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a `cvdata` object.

Data Types: `cvdata`

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
<code>BlockPath</code>	Full path to a model or block
<code>BlockHandle</code>	Handle to a model or block
<code>slObj</code>	Handle to a Simulink API object
<code>sfID</code>	Stateflow ID
<code>sfObj</code>	Handle to a Stateflow API object from a singly instantiated Stateflow chart
<code>{BlockPath, sfID}</code>	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

Object Specification	Description
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

simMode — Simulation mode

character array | string array

Simulation mode during coverage analysis, specified as one of the following:

Object Specification	Description
'Normal'	Model in normal simulation mode.
'SIL' (or 'PIL')	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefSIL' (or 'ModelRefPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefTopSIL' (or 'ModelRefTopPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to top model.

Data Types: char | string

ignore_descendants — Whether to ignore descendants in coverage results

0 (default) | 1

Whether to ignore descendants in coverage results, specified as 0 or 1, where:

- 0 includes coverage results of descendant objects.
- 1 ignores coverage results of descendant objects.

Data Types: single | double

Output Arguments**covInfo — Coverage information**

scalar

Coverage information, returned as a two-element array of the form [covered_outcomes, total_outcomes] if cvdo contains decision coverage data, or an empty array if it does not.

covered_outcomes	Number of decision outcomes satisfied for modelObject
total_outcomes	Total number of decision outcomes for modelObject

Data Types: double

description — Decision coverage description

structure

Decision coverage description, returned as a structure array with the following fields:

isFiltered — Block exclusion flag

0 | 1

Block exclusion flag, returned as 1 if the block is excluded and 0 if it is not.

Data Types: double

filterRationale — Block coverage filter rationale

character array

Block coverage filter rationale, returned as a character array.

Data Types: char

justifiedCoverage — Number of justified coverage objective outcomes

scalar

Number of justified coverage objective outcomes, returned as a scalar double.

Data Types: double

isJustified — Block justification flag

0 | 1

Block justification flag, returned as 1 if the block is justified or 0 if it is not.

Data Types: double

decision – Information for individual decisions

structure array

Information for individual decisions, returned as a structure with the following fields:

isFiltered – Decision exclusion flag

0 | 1

Decision exclusion flag, returned as 1 if the decision is excluded or 0 if it is not.

Data Types: double

isJustified – Decision justification flag

0 | 1

Decision justification flag, returned as 1 if the decision is justified or 0 if it is not.

Data Types: double

filterRationale – Coverage filter rationale

character array

Coverage filter rationale, returned as a character array.

Data Types: char

text – Description of decision

character array

Description of the decision, returned as a character array.

Data Types: char

outcome – Information for individual decision outcomes

structure

Information for individual decision outcomes, returned as a structure array with the following fields:

text	Outcome of the decision, returned as 'true' or 'false'.
executionCount	The number of time steps the decision had this outcome, returned as a scalar double.
isFiltered	Decision outcome exclusion flag, returned as 1 if the outcome is excluded or 0 if it is not.
isJustified	Decision outcome justification flag, returned as 1 if the outcome is justified or 0 if it is not.
filterRationale	Coverage filter rationale, returned as a character array.

<code>executedIn</code>	Aggregated coverage test case traceability information, returned as a structure array. If your coverage data does not contain aggregated results from multiple simulations, <code>executedIn</code> is an empty array. If your coverage data contains aggregated results, <code>executedIn</code> indicates which test runs executed the decision outcome.
<code>executedIn.uniqueId</code>	Unique identifier for the <code>cvdata</code> object created by the test case that executed this condition outcome, returned as a character array.
<code>executedIn.analyzedModel</code>	The name of the model analyzed, returned as a character array.
<code>executedIn.description</code>	The test case description, returned as a character array.
<code>executedIn.date</code>	The date and time of the simulation that created the <code>cvdata</code> object, returned as a character array.
<code>executedIn.traceLabel</code>	The short name of the test case, returned as a character array.
<code>executedIn.testRunInfo</code>	Test details, returned as a structure array.
<code>executedIn.testRunInfo.runid</code>	The identifier of the run that generated the coverage result, returned as a scalar double.
<code>executedIn.testRunInfo.runName</code>	The name of the test case that generated the coverage result, returned as a character array.
<code>executedIn.testRunInfo.testId</code>	Identifying data for the test case that generated the coverage result, returned as a structure array.
<code>executedIn.testRunInfo.testId.uuid</code>	The unique identifier for the test case that generated the coverage result, returned as a character array.
<code>executedIn.testRunInfo.testId.contextType</code>	The test context in which the coverage result was obtained, returned as one of these values: 'RE' for the Coverage Results Explorer 'ST' for the Test Manager in Simulink Test

Data Types: struct

Data Types: struct

Data Types: struct

Alternatives

Use the coverage settings to collect and display decision coverage results:

- 1 Open the model.
- 2 In the Model Editor, select **Model Settings** on the **Modeling** tab.

- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **Decision** as the structural coverage level.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model by clicking the **Run** button and review the results.

Version History

Introduced in R2006b

See Also

[complexityinfo](#) | [conditioninfo](#) | [cvsim](#) | [getCoverageInfo](#) | [mcdcinfo](#) | [overflowsaturationinfo](#) | [sigrangeinfo](#) | [sigsizeinfo](#) | [tableinfo](#) | [executioninfo](#) | [relationalboundaryinfo](#)

Topics

“Decision Coverage (DC)”

executioninfo

Retrieve execution coverage information from cvdata object

Syntax

```
covInfo = executioninfo(cvdo,modelObject)
covInfo = executioninfo(cvdo,modelObject,simMode)
covInfo = executioninfo(cvdo,modelObject,ignore_descendants)
[covInfo,description] = executioninfo(cvdo,modelObject)
```

Description

`covInfo = executioninfo(cvdo,modelObject)` returns execution coverage results from the cvdata object `cvdo` for the model component specified by `object`.

`covInfo = executioninfo(cvdo,modelObject,simMode)` returns execution coverage results from the cvdata object `cvdo` for the model component specified by `object` for the simulation mode.

`covInfo = executioninfo(cvdo,modelObject,ignore_descendants)` returns execution coverage results for `object`, depending on the value of `ignore_descendants`.

`[covInfo,description] = executioninfo(cvdo,modelObject)` returns execution coverage results and text descriptions of execution points associated with `object`.

Examples

Retrieve Execution Coverage Information

Open the `slvndemo_cv_small_controller` model and create the test specification object `testObj`. Enable execution coverage for `slvndemo_cv_small_controller` and execute `testObj` using `cvsim`. Use `executioninfo` to retrieve the execution coverage results for the Saturation block and determine the percentage of execution outcomes covered:

```
mdl = 'slvndemo_cv_small_controller';
open_system(mdl)
testObj = cvtest(mdl)
data = cvsim(testObj)
blk_handle = get_param([mdl, '/Saturation'], 'Handle');
cov = executioninfo(data, blk_handle)
percent_cov = 100 * cov(1) / cov(2)
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a cvdata object.

Data Types: cvdata

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
BlockPath	Full path to a model or block
BlockHandle	Handle to a model or block
slObj	Handle to a Simulink API object
sfID	Stateflow ID
sfObj	Handle to a Stateflow API object from a singly instantiated Stateflow chart
{BlockPath, sfID}	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file

Object Specification	Description
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

simMode — Simulation mode

character array | string array

Simulation mode during coverage analysis, specified as one of the following:

Object Specification	Description
'Normal'	Model in normal simulation mode.
'SIL' (or 'PIL')	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefSIL' (or 'ModelRefPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefTopSIL' (or 'ModelRefTopPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to top model.

Data Types: char | string

ignore_descendants — Whether to ignore descendants in coverage results

0 (default) | 1

Whether to ignore descendants in coverage results, specified as 0 or 1, where:

- 0 includes coverage results of descendant objects.
- 1 ignores coverage results of descendant objects.

Data Types: single | double

Output Arguments

covInfo — Coverage information

scalar

Coverage information, returned as a two-element array of the form [covered_outcomes, total_outcomes] if cvdo contains execution coverage data, or an empty array if it does not.

covered_outcomes	Number of execution outcomes satisfied for object
total_outcomes	Number of execution outcomes for object

Data Types: double

description — Execution coverage description

structure

Execution coverage description, returned as a structure with the following fields:

isFiltered — Block exclusion flag

0 | 1

Block exclusion flag, returned as 1 if the block is excluded and 0 if it is not.

Data Types: double

filterRationale — Block coverage filter rationale

character array

Block coverage filter rationale, returned as a character array.

Data Types: char

justifiedCoverage — Number of justified coverage objective outcomes

scalar

Number of justified coverage objective outcomes, returned as a scalar double.

Data Types: double

isJustified — Block justification flag

0 | 1

Block justification flag, returned as 1 if the block is justified or 0 if it is not.

Data Types: double

decision — Information for individual decisions

structure array

Information for individual decisions, returned as a structure array with the following fields:

text — Block execution text

'Block executed' (default)

Block execution text, returned as the character array 'Block executed'. The text field does not change even if the block has 0% execution coverage.

Data Types: char

executionCount — Number of time steps the model object executed

scalar double

Number of time steps the model object executed, returned as a scalar double.

Data Types: double

Data Types: struct

Alternatives

Use the coverage settings to collect and display execution coverage results:

- 1 Open the model.
- 2 In the Model Editor, select **Model Settings** on the **Modeling** tab.

- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **Block Execution** as the structural coverage level.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model by clicking the **Run** button and review the results.

Version History

Introduced in R2006b

See Also

[complexityinfo](#) | [conditioninfo](#) | [decisioninfo](#) | [cvsim](#) | [getCoverageInfo](#) | [mcdcinfo](#) | [overflowsaturationinfo](#) | [sigrangeinfo](#) | [sigsizeinfo](#) | [tableinfo](#) | [relationalboundaryinfo](#)

Topics

“Execution Coverage (EC)”

get

Class: `cv.cvdatagroup`

Package: `cv`

Get specified `cvdata` object in `cvdatagroup`

Syntax

```
covData = get(cvdg, dataName)
covData = get(cvdg, dataName, simMode)
```

Description

`covData = get(cvdg, dataName)` returns one or more `cvdata` objects in the `cv.cvdatagroup` object `cvdg` that correspond to the model or file specified in `dataName`. `get` returns multiple `cvdata` objects if you simulate the same model reference with multiple different simulation modes.

`covData = get(cvdg, dataName, simMode)` returns the `cvdata` object or objects that have the simulation mode `simMode`.

Input Arguments

cvdg — Coverage data group

`cv.cvdatagroup` object

Coverage data group, specified as a `cv.cvdatagroup` object.

Data Types: `cv.cvdatagroup`

dataName — Name of coverage data

character array | string array

Name of coverage data, specified as a character array or string array. `dataName` can be the name of a model, subsystem, or external code file that corresponds to one or more `cvdata` objects contained in the `cv.cvdatagroup`. If the function does not find a match, it returns an empty array. If the function finds multiple matches, it returns a cell array of `cvdata` objects.

Data Types: `char` | `string`

simMode — Simulation mode

"Normal" | "SIL" | "PIL" | "ModelRefSIL" | "ModelRefPIL" | "ModelRefTopSIL" | "ModelRefTopPIL"

Simulation mode that corresponds to one or more `cvdata` objects in the `cv.cvdatagroup` object, specified as one of the following:

Object Specification	Description
"Normal"	Model in normal simulation mode.

Object Specification	Description
"SIL" or "PIL"	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
"ModelRefSIL" or "ModelRefPIL"	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
"ModelRefTopSIL" or "ModelRefTopPIL"	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to the top model.

If the function does not find a match, it returns an empty array. If the function finds multiple matches, it returns a cell array.

Data Types: `char` | `string`

Output Arguments

covData — Coverage data

`cvdata` object | cell array

Coverage data, returned as a `cvdata` object, or a cell array of `cvdata` objects. If you specified `simMode`, `covDataArray` only contains coverage data with the matching `simMode`.

Data Types: `cell`

Examples

Get Coverage Data from `cvdatagroup` Objects

This example shows how to retrieve a specified coverage data object, all coverage data objects, or all coverage data object names from a `cv.cvdatagroup` object.

Load the example model.

```
modelName = 'slvndemo_eml_model_coverage_demo';
load_system(modelName);
```

Use the `Simulink.SimulationInput` class to set up the simulation scenario with coverage enabled.

```
simIn = Simulink.SimulationInput(modelName);
simIn = setModelParameter(simIn, 'CovEnable', 'on');
simIn = setModelParameter(simIn, 'CovMetricStructuralLevel', 'MCDC');
simIn = setModelParameter(simIn, 'CovSaveSingleToWorkspaceVar', 'on');
simIn = setModelParameter(simIn, 'CovSaveName', 'covData');
simIn = setModelParameter(simIn, 'CovSaveOutputData', 'off');
```

Simulate the model by passing the `SimulationInput` object to the `sim` function, and then retrieve the coverage data from the `SimulationOutput` object.

```
simOut = sim(simIn);
covData = simOut.covData
```

```
covData = ... cv.cvdatagroup
```



```
slcoverageExternalFile (simulation mode: Normal)
slvndemo_eml_model_coverage_demo (simulation mode: Normal)
```

The example model contains a MATLAB® Function block that calls an external MATLAB function. Because Simulink Coverage returns the coverage data for the MATLAB function in a separate `cvdata` object, `sim` returns a `cv.cvdatalogroup` object that contains the coverage results for both the model and the MATLAB function.

To determine the name associated with each `cvdata` object inside the `cv.cvdatalogroup`, use the class method `allNames`.

```
covDataNames = allNames(covData)

covDataNames =

    2x1 cell array

    {'slcoverageExternalFile'          }
    {'slvndemo_eml_model_coverage_demo'}
```

The `cv.cvdatalogroup` contains the coverage results for the model as well as the MATLAB function.

To retrieve the coverage data for the model, use the `get` class method.

```
modelCovData = get(covData,modelName)

modelCovData = ... cvdata
    version: (R2022b)
    id: 1216
    type: TEST_DATA
    test: cvtest object
    rootID: 1218
    checksum: [1x1 struct]
    modelinfo: [1x1 struct]
    startTime: 31-Aug-2022 08:04:40
    stopTime: 31-Aug-2022 08:04:40
    intervalStartTime: 0
    intervalStopTime: 0
    simulationStartTime: 0
    simulationStopTime: 1
    filter:
    simMode: Normal
```

To retrieve coverage data for both the model and the external file, use the `getAll` class method.

```
covDataArray = getAll(covData)

covDataArray =

    2x1 cell array
```

```
{1x1 cvdata}  
{1x1 cvdata}
```

Version History

Introduced in R2007b

See Also

[cvdata](#) | [cv.cvdatagroup](#)

getAll

Class: cv.cvdatagroup

Package: cv

Get all cvdata objects in cvdatagroup object

Syntax

```
covDataArray = getAll(cvdg)
covDataArray = getAll(cvdg, simMode)
```

Description

`covDataArray = getAll(cvdg)` returns the cvdata objects in the cv.cvdatagroup object `cvdg`.

`covDataArray = getAll(cvdg, simMode)` returns the cvdata objects that have simulation mode `simMode`.

Input Arguments

cvdg — Coverage data group

cv.cvdatagroup object

Coverage data group, specified as a cvdatagroup object.

Data Types: cv.cvdatagroup

simMode — Simulation mode

"Normal" | "SIL" | "PIL" | "ModelRefSIL" | "ModelRefPIL" | "ModelRefTopSIL" | "ModelRefTopPIL"

Simulation mode that corresponds to one or more cvdata objects in the cv.cvdatagroup object, specified as one of the following:

Object Specification	Description
"Normal"	Model in normal simulation mode.
"SIL" or "PIL"	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
"ModelRefSIL" or "ModelRefPIL"	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
"ModelRefTopSIL" or "ModelRefTopPIL"	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to the top model.

If the function does not find a match, it returns an empty array. If the function finds multiple matches, it returns a cell array.

Data Types: char | string

Output Arguments

covDataArray — Coverage data

cell array

Coverage data, returned as a cell array of `cvdata` objects. If you specified `simMode`, `covDataArray` contains only coverage data that matches `simMode`.

Data Types: `cell`

Examples

Get Coverage Data from `cvdatagroup` Objects

This example shows how to retrieve a specified coverage data object, all coverage data objects, or all coverage data object names from a `cv.cvdatagroup` object.

Load the example model.

```
modelName = 'slvndemo_eml_model_coverage_demo';
load_system(modelName);
```

Use the `Simulink.SimulationInput` class to set up the simulation scenario with coverage enabled.

```
simIn = Simulink.SimulationInput(modelName);
simIn = setModelParameter(simIn, 'CovEnable', 'on');
simIn = setModelParameter(simIn, 'CovMetricStructuralLevel', 'MCDC');
simIn = setModelParameter(simIn, 'CovSaveSingleToWorkspaceVar', 'on');
simIn = setModelParameter(simIn, 'CovSaveName', 'covData');
simIn = setModelParameter(simIn, 'CovSaveOutputData', 'off');
```

Simulate the model by passing the `SimulationInput` object to the `sim` function, and then retrieve the coverage data from the `SimulationOutput` object.

```
simOut = sim(simIn);
covData = simOut.covData
```

```
covData = ... cv.cvdatagroup
```

```
slcoverageExternalFile (simulation mode: Normal)
slvndemo_eml_model_coverage_demo (simulation mode: Normal)
```

The example model contains a MATLAB® Function block that calls an external MATLAB function. Because Simulink Coverage returns the coverage data for the MATLAB function in a separate `cvdata` object, `sim` returns a `cv.cvdatagroup` object that contains the coverage results for both the model and the MATLAB function.

To determine the name associated with each `cvdata` object inside the `cv.cvdatagroup`, use the class method `allNames`.

```
covDataNames = allNames(covData)
```

```

covDataNames =

    2x1 cell array

    {'slcoverageExternalFile'      }
    {'slvndemo_eml_model_coverage_demo'}

```

The `cv.cvdatabroup` contains the coverage results for the model as well as the MATLAB function.

To retrieve the coverage data for the model, use the `get` class method.

```
modelCovData = get(covData,modelName)
```

```

modelCovData = ... cvdata
    version: (R2022b)
         id: 1216
        type: TEST_DATA
        test: cvtest object
    rootID: 1218
   checksum: [1x1 struct]
  modelinfo: [1x1 struct]
  startTime: 31-Aug-2022 08:04:40
  stopTime: 31-Aug-2022 08:04:40
 intervalStartTime: 0
 intervalStopTime: 0
simulationStartTime: 0
simulationStopTime: 1
          filter:
        simMode: Normal

```

To retrieve coverage data for both the model and the external file, use the `getAll` class method.

```
covDataArray = getAll(covData)
```

```

covDataArray =

    2x1 cell array

    {1x1 cvdata}
    {1x1 cvdata}

```

Version History

Introduced in R2007b

See Also

extract

Extract subsystem coverage data from system-level coverage data

Syntax

```
excvd = extract(cvdo, subsystem)
```

Description

`excvd = extract(cvdo, subsystem)` extracts coverage data for `subsystem` from system-level coverage data `cvdo`.

Examples

Create HTML Coverage Report for a Subsystem from Model Coverage Data

Record coverage data for the `sf_car` model.

```
model = 'sf_car'  
openExample(model)  
load_system(model)  
cvdo = cvsim(model);
```

Extract the coverage data for the `shift_logic` subsystem from the coverage data from the top-level model `sf_car`.

```
excvd = extract(cvdo, 'sf_car/shift_logic');
```

Create a coverage report from the extracted coverage data.

```
cvhtml('tmp', excvd)
```

Input Arguments

cvdo — System-level coverage data object

object (default)

System-level coverage data object from a top-level model, specified as an object.

Data Types: object

subsystem — Subsystem in a Simulink model

character vector (default)

Full name or path of a subsystem in an open or loaded Simulink model, specified as a character vector.

Data Types: character vector

Output Arguments

excvd — **Extracted coverage data object**

object

Coverage data object for a subsystem extracted from a Simulink model, returned as an object.

Version History

Introduced in R2019b

Extract subsystem coverage data from system-level coverage data

You can use `extract` to extract the coverage data for a subsystem.

See Also

`cv.cvatagroup` | `cvhtml` | `cvsim`

Topics

"Automating Model Coverage Tasks"

getCoverageInfo

Retrieve coverage information for Simulink Design Verifier blocks from cvdata object

Syntax

```
[covInfo,description] = getCoverageInfo(cvdo,modelObject)
[covInfo,description] = getCoverageInfo(cvdo,modelObject,metric)
[covInfo,description] = getCoverageInfo(cvdo,modelObject,metric,
ignore_descendants)
```

Description

[covInfo,description] = getCoverageInfo(cvdo,modelObject) collects Simulink Design Verifier coverage for object, based on coverage results in cvdo. object is a handle to a block, subsystem, or Stateflow chart. getCoverageData returns coverage data only for Simulink Design Verifier library blocks in object's hierarchy.

[covInfo,description] = getCoverageInfo(cvdo,modelObject,metric) returns coverage data for the block type specified in metric. If object does not match the block type, getCoverageInfo does not return data.

[covInfo,description] = getCoverageInfo(cvdo,modelObject,metric, ignore_descendants) returns coverage data about object, omitting coverage data for its descendant objects if ignore_descendants equals 1.

Examples

Get Coverage for a Block Type

Get coverage for all Proof Objective blocks in Verification Subsystem1

```
mdl = 'sldvdemo_powerwindow_vs';
open_system(mdl)
set_param(mdl, 'StopTime', '10')
testObj = cvtest(mdl);
testObj.settings.designverifier = 1;
data = cvsim(testObj);
verifSubsys = [mdl '/Verification Subsystem1'];
covProof = getCoverageInfo(data, verifSubsys, cvmetric.Sldv.proof)
```

covProof is a two-element vector of the form [covered_outcomestotal_outcomes] showing 1 covered outcome out of 1 total proof objective outcome.

Get Coverage for a Specific Block

Get coverage for a specific Test Objective block in Verification Subsystem1

```
mdl = 'sldvdemo_powerwindow_vs';
open_system(mdl)
set_param(mdl, 'StopTime', '10')
```



```
testObj = cvtest mdl;
testObj.settings.designverifier = 1;
data = cvsimsim(testObj);
verifSubsys = [mdl '/Verification Subsystem1'];
testObjBlock = [verifSubsys '/Test Objective2'];
covTest = getCoverageInfo(data, testObjBlock)
```

`covTest` is a two-element vector of the form `[covered_outcomes total_outcomes]` showing 0 covered outcomes out of 1 total test objective outcome.

Get Coverage for All Metrics

Get coverage data and descriptions for all available metrics recorded in Verification Subsystem1

```
mdl = 'sldvdemo_powerwindow_vs';
open_system(mdl)
set_param(mdl, 'StopTime', '10')
testObj = cvtest(mdl);
testObj.settings.designverifier = 1;
data = cvsimsim(testObj);
verifSubsys = [mdl '/Verification Subsystem1'];
[covAll, descrAll] = getCoverageInfo(data, verifSubsys, ...
{cvmetric.Sldv.proof, cvmetric.Sldv.test})
```

`covAll` is a cell array with cells corresponding to the objective outcomes for each metric. `descrAll` is a cell array with cells corresponding to descriptions of each metric.

```
covAll{1}
covAll{2}
```

`covAll{1}` is a two-element vector of the form `[covered_outcomes total_outcomes]` showing 1 covered outcomes out of 1 total proof objective outcomes. `covAll{2}` is a two-element vector of the form `[covered_outcomes total_outcomes]` showing 0 covered outcomes out of 1 total test objective outcomes.

```
descrAll{1}
descrAll{2}
```

`descrAll{1}` is a structure array containing descriptions of each proof objective, and descriptions and execution counts for each outcome. `descrAll{2}` is a structure array containing descriptions of each test objective, and descriptions and execution counts for each outcome.

Input Arguments

cvdo — Coverage data

`cvdata` object

Coverage data, specified as a `cvdata` object.

Data Types: `cvdata`

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
BlockPath	Full path to a model or block
BlockHandle	Handle to a model or block
sObj	Handle to a Simulink API object
sfID	Stateflow ID
sfObj	Handle to a Stateflow API object from a singly instantiated Stateflow chart
{BlockPath, sfID}	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

metric — Coverage metric to retrieve

cvmetric.Sldv enumeration

Coverage metric to retrieve, specified as a cvmetric.Sldv enumeration, or a cell array of enumerations, with values that correspond to Simulink Design Verifier library blocks. If you do not specify a metric, getCoverageInfo returns coverage information for all available metrics for the specified modelObject.

test	Test Objective block
proof	Proof Objective block
condition	Test Condition block
assumption	Proof Assumption block

Data Types: cvmetric.Sldv

ignore_descendants — Whether to ignore descendants in coverage results

0 (default) | 1

Whether to ignore descendants in coverage results, specified as 0 or 1, where:

- 0 includes coverage results of descendant objects.
- 1 ignores coverage results of descendant objects.

Data Types: single | double

Output Arguments**covInfo — Coverage Information**

scalar | cell array

Coverage information, returned as a two-element array of the form [covered_outcomes, total_outcomes] if cvdo contains decision coverage data, or an empty array if it does not. If modelObject receives coverage for more than one metric, covInfo returns a cell array of two-element arrays where each cell corresponds to one metric.

covered_outcomes	Number of decision outcomes satisfied for modelObject
total_outcomes	Total number of decision outcomes for modelObject

Data Types: double

description — Coverage description

structure | cell array

Coverage description, returned as a structure array with the following fields:

Note If modelObject receives coverage for more than one metric, description returns a cell array of structures where each cell contains a description structure for one metric.

isFiltered — Block exclusion flag

0 | 1

Block exclusion flag, returned as 1 if the block is excluded and 0 if it is not.

Data Types: double

filterRationale — Block coverage filter rationale

character array

Block coverage filter rationale, returned as a character array.

Data Types: char

justifiedCoverage — Number of justified coverage objective outcomes

scalar

Number of justified coverage objective outcomes, returned as a scalar double.

Data Types: double

isJustified — Block justification flag

0 | 1

Block justification flag, returned as 1 if the block is justified or 0 if it is not.

Data Types: double

testobjects — Test objective information

structure

Test objective information, returned as a structure with the following fields:

text — Text

'T'

Text, returned as the character array 'T'.

Data Types: char

executionCount — Number of time steps the objective is true

scalar double

Number of time steps the objective is true, returned as a scalar double.

Data Types: double

Data Types: struct

Data Types: struct

Alternatives

Use the coverage settings to collect and display coverage results for Simulink Design Verifier library blocks:

- 1 Open the model.

- 2 In the Model Editor, select **Model Settings** on the **Modeling** tab.
- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **Objectives and constraints**.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model and review the results.

Version History

Introduced in R2009b

See Also

[complexityinfo](#) | [conditioninfo](#) | [cvsim](#) | [decisioninfo](#) | [mcdcinfo](#) | [overflowsaturationinfo](#) | [sigrangeinfo](#) | [sigsizeinfo](#) | [tableinfo](#) | [executioninfo](#) | [relationalboundaryinfo](#)

Topics

“Simulink Design Verifier Coverage”

mcdcinfo

Retrieve modified condition/decision coverage information from cvdata object

Syntax

```
covInfo = mcdcinfo(cvdo,modelObject)
covInfo = mcdcinfo(cvdo, modelObject, simMode)
covInfo = mcdcinfo(cvdo,modelObject,ignore_descendants)
[covInfo, description] = mcdcinfo(cvdo,modelObject)
```

Description

`covInfo = mcdcinfo(cvdo,modelObject)` returns modified condition decision coverage (MCDC) results from the cvdata object `cvdo` for the model component specified by `modelObject`.

`covInfo = mcdcinfo(cvdo, modelObject, simMode)` returns MCDC results from the cvdata object `cvdo` for the model component specified by `modelObject` for the simulation mode `simMode`.

`covInfo = mcdcinfo(cvdo,modelObject,ignore_descendants)` returns MCDC results for `modelObject`, depending on the value of `ignore_descendants`.

`[covInfo, description] = mcdcinfo(cvdo,modelObject)` returns MCDC results and text descriptions of each condition/decision in `modelObject`.

Examples

Retrieve MCDC Coverage Information

Collect MCDC coverage for the `slvndemo_cv_small_controller` model and determine the percentage of MCDC coverage collected for the Logic block in the Gain subsystem:

```
mdl = 'slvndemo_cv_small_controller';
open_system(mdl)
%Create test specification object
testObj = cvtest(mdl)
%Enable MCDC coverage
testObj.settings.mcdc = 1;
%Simulate model
data = cvsim(testObj)
%Retrieve MCDC results for Logic block
blk_handle = get_param([mdl, '/Gain/Logic'], 'Handle');
cov = mcdcinfo(data, blk_handle)
%Percentage of MCDC outcomes covered
percent_cov = 100 * cov(1) / cov(2)
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a `cvdata` object.

Data Types: `cvdata`

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
<code>BlockPath</code>	Full path to a model or block
<code>BlockHandle</code>	Handle to a model or block
<code>slObj</code>	Handle to a Simulink API object
<code>sfID</code>	Stateflow ID
<code>sfObj</code>	Handle to a Stateflow API object from a singly instantiated Stateflow chart
<code>{BlockPath, sfID}</code>	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
<code>{BlockPath, sfObj}</code>	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
<code>{BlockHandle, sfID}</code>	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
<code>{BlockPath, fName}</code>	Cell array with the path to an S-Function block and the name of a source file
<code>{BlockHandle, fName}</code>	Cell array with an S-Function block handle and the name of a source file
<code>{BlockPath, fName, funName}</code>	Cell array with the path to an S-Function block, the name of a source file, and a function name
<code>{BlockHandle, fName, funName}</code>	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
<code>{fileName, funName}</code>	Cell array with the name of a source file and a function name
<code>{Model, fileName}</code>	Cell array with a model name or model handle and the name of a source file

Object Specification	Description
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

simMode — Simulation mode

character array | string array

Simulation mode during coverage analysis, specified as one of the following:

Object Specification	Description
'Normal'	Model in normal simulation mode.
'SIL' (or 'PIL')	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefSIL' (or 'ModelRefPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefTopSIL' (or 'ModelRefTopPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to top model.

Data Types: char | string

ignore_descendants — Whether to ignore descendants in coverage results

0 (default) | 1

Whether to ignore descendants in coverage results, specified as 0 or 1, where:

- 0 includes coverage results of descendant objects.
- 1 ignores coverage results of descendant objects.

Data Types: single | double

Output Arguments

covInfo — Coverage information

scalar

Coverage information, returned as a two-element array of the form [covered_outcomes, total_outcomes] if cvdo contains MCDC data, or an empty array if it does not.

covered_outcomes	Number of MCDC outcomes satisfied for modelObject
total_outcomes	Total number of MCDC outcomes for modelObject

Data Types: double

description — MCDC coverage description

structure

MCDC coverage description, returned as a structure array with the following fields:

isFiltered — Block exclusion flag

0 | 1

Block exclusion flag, returned as 1 if the block is excluded and 0 if it is not.

Data Types: double

filterRationale — Block coverage filter rationale

character array

Block coverage filter rationale, returned as a character array.

Data Types: char

justifiedCoverage — Number of justified coverage objective outcomes

scalar

Number of justified coverage objective outcomes, returned as a scalar double.

Data Types: double

text — Description of the measured objective

character array

Description of the measured objective, returned as a character array.

Data Types: char

condition — Information for individual MCDC outcomes

structure

Information for individual MCDC outcomes, returned as a structure with the following fields:

isFiltered — MCDC outcome exclusion flag

0 | 1

MCDC outcome exclusion flag, returned as 1 if the MCDC outcome is excluded or 0 if it is not.

Data Types: double

isJustified — MCDC outcome justification flag

0 | 1

MCDC outcome justification flag, returned as 1 if the MCDC outcome is justified or 0 if it is not.

Data Types: double

filterRationale — Coverage filter rationale

character array

Coverage filter rationale, returned as a character array. If no outcomes are filtered, `filterRationale` is returned as an empty array.

Data Types: char

text — Description of MCDC outcome

character array

Description of the MCDC outcome, returned as a character array.

Data Types: char

achieved – MCDC outcome flag

0 | 1

MCDC outcome flag, returned as 1 if the MCDC outcome is fully satisfied, and 0 if it is not. The MCDC outcome is fully satisfied if each condition independently affects the decision outcome.

Data Types: double

trueResult – Condition values that achieve the true MCDC result

scalar

Condition values that achieve the true MCDC result, returned as a

Data Types: double

falseResult – Number of time steps condition is false

scalar

Number of time steps the condition is false, returned as a scalar.

Data Types: double

trueExecutedIn – Aggregated coverage test case traceability information

structure array | []

Aggregated coverage test case traceability information, returned as a structure array. If your coverage data does not contain aggregated results from multiple simulations, trueExecutedIn is an empty array. If your coverage data contains aggregated results, trueExecutedIn indicates which test runs executed the true condition outcome and has the following fields:

uniqueId	Unique identifier for the cvdata object created by the test case that executed this condition outcome, returned as a character array.
analyzedModel	The name of the model analyzed, returned as a character array.
description	The test case description, returned as a character array.
date	The date and time of the simulation that created the cvdata object, returned as a character array.
traceLabel	The short name of the test case, returned as a character array.
testRunInfo	Test details, returned as a structure array.
testRunInfo.runid	The identifier of the run that generated the coverage result, returned as a scalar double.
testRunInfo.runName	The name of the test case that generated the coverage result, returned as a character array.

<code>testRunInfo.testId</code>	Identifying data for the test case that generated the coverage result, returned as a structure array.
<code>testRunInfo.testId.uuid</code>	The unique identifier for the test case that generated the coverage result, returned as a character array.
<code>testRunInfo.testId.contextType</code>	The test context in which the coverage result was obtained, returned as one of these values: 'RE' for the Coverage Results Explorer 'ST' for the Test Manager in Simulink Test

Data Types: struct

falseExecutedIn — Aggregated coverage test case traceability information

structure array | []

Aggregated coverage test case traceability information, returned as a structure array. If your coverage data does not contain aggregated results from multiple simulations, `falseExecutedIn` is an empty array. If your coverage data contains aggregated results, `falseExecutedIn` indicates which test runs executed the `false` condition outcome and has the following fields:

<code>uniqueId</code>	Unique identifier for the <code>cvdata</code> object created by the test case that executed this condition outcome, returned as a character array.
<code>analyzedModel</code>	The name of the model analyzed, returned as a character array.
<code>description</code>	The test case description, returned as a character array.
<code>date</code>	The date and time of the simulation that created the <code>cvdata</code> object, returned as a character array.
<code>traceLabel</code>	The short name of the test case, returned as a character array.
<code>testRunInfo</code>	Test details, returned as a structure array.
<code>testRunInfo.runid</code>	The identifier of the run that generated the coverage result, returned as a scalar double.
<code>testRunInfo.runName</code>	The name of the test case that generated the coverage result, returned as a character array.
<code>testRunInfo.testId</code>	Identifying data for the test case that generated the coverage result, returned as a structure array.
<code>testRunInfo.testId.uuid</code>	The unique identifier for the test case that generated the coverage result, returned as a character array.

<code>testRunInfo.testId.contextType</code>	The test context in which the coverage result was obtained, returned as one of these values: 'RE' for the Coverage Results Explorer 'ST' for the Test Manager in Simulink Test
---------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Data Types: `struct`

Data Types: `double`

Data Types: `struct`

Alternatives

Use the coverage settings to collect MCDC coverage for a model:

- 1 Open the model.
- 2 In the Model Editor, select **Model Settings** on the **Modeling** tab.
- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **MCDC** as the structural coverage level.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model by clicking the **Run** button and review the results.

Version History

Introduced in R2006b

See Also

`complexityinfo` | `conditioninfo` | `cvsim` | `decisioninfo` | `getCoverageInfo` | `overflowsaturationinfo` | `sigrangeinfo` | `sigsizinfo` | `tableinfo` | `executioninfo` | `relationalboundaryinfo`

Topics

"Modified Condition/Decision Coverage (MCDC)"

"MCDC Analysis"

overflowsaturationinfo

Retrieve saturation on integer overflow coverage from cvdata object

Syntax

```
coverage = overflowsaturationinfo(covdata, object)
coverage = overflowsaturationinfo(covdata,object,ignore_descendants)
[coverage, description] = overflowsaturationinfo(covdata, object)
```

Description

`coverage = overflowsaturationinfo(covdata, object)` returns saturation on integer overflow coverage results from the cvdata object covdata for the model object specified by object and its descendants.

`coverage = overflowsaturationinfo(covdata,object,ignore_descendants)` returns saturation on integer overflow coverage results from the cvdata object covdata for the model object specified by object and, depending on the value of ignore_descendants, descendant objects.

`[coverage, description] = overflowsaturationinfo(covdata, object)` returns saturation on integer overflow coverage results from the cvdata object covdata for the model object specified by object, and textual descriptions of each coverage outcome.

Examples

Extract Saturation on Integer Overflow Data

This example shows how to use `overflowsaturationinfo` to extract saturation on integer overflow data for a MinMax block from a cvdata object.

Generate coverage data

Open the model and set coverage settings.

```
load_system('slcoverage_fuelsys');
```

Create a `Simulink.SimulationInput` object to change configuration parameters without modifying the model.

```
covSet = Simulink.SimulationInput('slcoverage_fuelsys');
```

Turn on coverage analysis and configure Simulink® to save the coverage data in a separate cvdata object in the workspace.

```
covSet = covSet.setModelParameter('CovEnable','on');
covSet = covSet.setModelParameter('CovSaveSingleToWorkspaceVar','on');
covSet = covSet.setModelParameter('CovSaveName','covData');
covSet = covSet.setModelParameter('CovScope','EntireSystem');
```

Enable collection of saturation on integer overflow Coverage and simulate the model by calling `sim` with the `SimulationInput` object as the input.

```
covSet = covSet.setModelParameter('CovMetricSaturateOnIntegerOverflow','on');  
simOut = sim(covSet);
```

Extract saturation on integer overflow results

Get the block handle to the MinMax block using `get_param` and then get the saturation on integer overflow results.

```
blockHandle = get_param(['slcoverage_fuelsys/',...  
    'Engine Gas Dynamics/Mixing & Combustion/MinMax'],'Handle');  
saturationResults = overflowsaturationinfo(covData,blockHandle)  
percentSaturationCoverage = 100 * saturationResults(1)/saturationResults(2)
```

```
saturationResults =
```

```
    1    2
```

```
percentSaturationCoverage =
```

```
    50
```

One out of two saturation on integer overflow decision outcomes were satisfied for the MinMax block in the Mixing & Combustion subsystem, so it received 50% saturation on integer overflow coverage.

Determine Individual Integer Overflow Outcomes

This example shows how to use `overflowsaturationinfo` to determine whether or not integer overflow occurs for a block in a model.

Generate coverage data

Load the `slvnvdemo_saturation_on_overflow_coverage` example model.

```
load_system('slvnvdemo_saturation_on_overflow_coverage');
```

Set coverage setting using a `Simulink.SimulationInput` object. Turn coverage on and configure Simulink® to output a `cvdata` object into the workspace.

```
covSet = Simulink.SimulationInput('slvnvdemo_saturation_on_overflow_coverage');  
covSet = covSet.setModelParameter('CovEnable','on');  
covSet = covSet.setModelParameter('CovSaveSingleToWorkspaceVar','on');  
covSet = covSet.setModelParameter('CovSaveName','covData');  
covSet = covSet.setModelParameter('CovScope','EntireSystem');
```

Extract saturation on integer overflow results

Retrieve saturation on integer overflow coverage results and description for the Sum block in the Controller subsystem of the Test Unit subsystem.

```

covSet = covSet.setModelParameter('CovMetricSaturateOnIntegerOverflow','on');
simOut = sim(covSet);
[covResults, covDesc] = overflowsaturationinfo(covData, ...
    ['slvndemo_saturation_on_overflow_coverage/Test Unit /' ...
    'Controller/Sum'])
percentSaturation = 100 * covResults(1)/covResults(2)

```

```

covResults =

```

```

    1    2

```

```

covDesc =

```

```

    struct with fields:

```

```

        isFiltered: 0
        isJustified: 0
    justifiedCoverage: 0
    filterRationale: ''
        decision: [1x1 struct]

```

```

percentSaturation =

```

```

    50

```

One out of two saturation on integer overflow decision outcomes were satisfied for the Sum block, so it received 50% saturation on integer overflow coverage.

Review the number of times the Sum block evaluated to each saturation on integer overflow outcome during simulation.

```

outcome1 = covDesc.decision.outcome(1)
outcome2 = covDesc.decision.outcome(2)

```

```

outcome1 =

```

```

    struct with fields:

```

```

        execCount: 3
    executionCount: 3
        text: 'false'
        isFiltered: 0
        isJustified: 0
    filterRationale: ''
        executedIn: []

```

```

outcome2 =

```

```

    struct with fields:

```

```

        execCount: 0
    executionCount: 0

```

```

        text: 'true'
    isFiltered: 0
    isJustified: 0
    filterRationale: ''
    executedIn: []

```

During simulation, integer overflow did *not* occur in the Sum block because the 'true' outcome has an execution count of 0.

If integer overflow is not possible for a block in your model, consider clearing the **Saturate on integer overflow** block parameter to optimize efficiency of your generated code.

Input Arguments

covdata — Coverage results data

cvdata object

Coverage results data, specified as a cvdata object.

object — Model or model component

full path | handle

Model or model component, specified as a full path, handle, or array of paths or handles.

Object Specification	Description
BlockPath	Full path to a model or block
BlockHandle	Handle to a model or block
slObj	Handle to a Simulink API object
sfID	Stateflow ID
sfObj	Handle to a Stateflow API object
{BlockPath, sfID}	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or atomic subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

Example: 'slvndemo_saturation_on_overflow_coverage'

Example: `get_param('slvndemo_cv_small_controller/Saturation', 'Handle')`

ignore_descendants — Preference to ignore coverage of descendant objects

0 (default) | 1

Preference to ignore coverage of descendant objects, specified as a logical value.

1 — Ignore coverage of descendant objects

0 — Collect coverage for descendant objects

Data Types: `logical`

Output Arguments

coverage — Saturation on overflow coverage results for object

numerical vector

Saturation on overflow coverage results, stored in a two-element vector of the form `[covered_outcomes total_outcomes]`. The two elements are:

<code>covered_outcomes</code>	Number of saturation on integer overflow outcomes satisfied for object
<code>total_outcomes</code>	Total number of saturation on integer overflow outcomes for object

Data Types: `double`

description — Textual description of coverage outcomes

structure array

Textual description of coverage outcomes for the model component specified by `object`, returned as a structure array. Depending on the types of model coverage collected, the structure array can have different fields. If only saturation on overflow coverage is collected, the structure array contains the following fields:

<code>isFiltered</code>	0 if the model component specified by <code>object</code> is not excluded from coverage recording. 1 if the model component specified by <code>object</code> is excluded from coverage recording. For more information about excluding objects from coverage, see “Coverage Filtering”.				
<code>decision.text</code>	'Saturate on integer overflow'				
<code>decision.outcome</code>	Structure array containing two fields for each coverage outcome: <table> <tr> <td><code>executionCount</code></td> <td>Number of times saturation on integer overflow for <code>object</code> evaluated to the outcome described by <code>text</code>.</td> </tr> <tr> <td><code>text</code></td> <td>'true' or 'false'</td> </tr> </table>	<code>executionCount</code>	Number of times saturation on integer overflow for <code>object</code> evaluated to the outcome described by <code>text</code> .	<code>text</code>	'true' or 'false'
<code>executionCount</code>	Number of times saturation on integer overflow for <code>object</code> evaluated to the outcome described by <code>text</code> .				
<code>text</code>	'true' or 'false'				

Saturation on integer overflow has two possible outcomes, 'true' and 'false'.

`decision.isFiltered`

0 if the model component specified by `object` is not excluded from coverage recording. 1 if the model component specified by `object` is excluded from coverage recording. For more information about excluding objects from coverage, see “Coverage Filtering”.

`decision.filterRationale`

Rationale for filtering the model component specified by `object`, if `object` is excluded from coverage and a rationale is specified. For more information about excluding objects from coverage, see “Coverage Filtering”.

Data Types: struct

Version History

Introduced in R2013a

See Also

`cvtest` | `cvsim` | `decisioninfo` | `complexityinfo` | `conditioninfo` | `getCoverageInfo` | `mcdcinfo` | `sigrangeinfo` | `sigsizeinfo` | `tableinfo` | `executioninfo` | `relationalboundaryinfo`

Topics

“Command Line Verification Tutorial”
“Saturate on Integer Overflow Coverage”

relationalboundaryinfo

Retrieve relational boundary coverage from cvdata object

Syntax

```
covInfo = relationalboundaryinfo(cvdo,modelObject)
covInfo = relationalboundaryinfo(cvdo,modelObject,simMode)
covInfo = relationalboundaryinfo(cvdo,modelObject,ignore_descendants)
[covInfo,description] = relationalboundaryinfo(cvdo,modelObject)
```

Description

`covInfo = relationalboundaryinfo(cvdo,modelObject)` returns relational boundary coverage results from the cvdata object `cvdo` for the model object specified by `object` and its descendants.

`covInfo = relationalboundaryinfo(cvdo,modelObject,simMode)` returns relational boundary coverage results from the cvdata object `cvdo` for the model object specified by `modelObject` and its descendants for the simulation mode `simMode`.

`covInfo = relationalboundaryinfo(cvdo,modelObject,ignore_descendants)` returns relational boundary coverage results from the cvdata object `cvdo` for the model object specified by `modelObject` and, depending on the value of `ignore_descendants`, descendant objects.

`[covInfo,description] = relationalboundaryinfo(cvdo,modelObject)` returns relational boundary coverage results from the cvdata object `cvdo` for the model object specified by `modelObject`, and textual descriptions of each coverage outcome.

Examples

Collect Relational Boundary Coverage for Supported Block in Model

This example shows how to collect relational boundary coverage information for a Saturation block in a model. For more information on blocks supported for relational boundary coverage, see “Model Objects That Receive Coverage”.

Open the `slvndemo_cv_small_controller` model. Create a model coverage test specification object for the model.

```
open_system('slvndemo_cv_small_controller');
testObj = cvtest('slvndemo_cv_small_controller');
```

In the model coverage test specification object, activate relational boundary coverage.

```
testObj.settings.relationalop = 1;
```

Simulate the model and collect coverage results in a cvdata object.

```
dataObj = cvsim(testObj);
```

Obtain relational boundary coverage results for the Saturation block in `slvndemo_cv_small_controller`. The coverage results are stored in a two-element vector of the form `[covered_outcomes total_outcomes]`.

```
blockHandle = get_param('slvndemo_cv_small_controller/Saturation','Handle');  
[covResults,covDesc] = relationalboundaryinfo(dataObj,blockHandle)
```

```
covResults =
```

```
    2    4
```

```
covDesc =
```

```
    isFiltered: 0  
    decision: [1x2 struct]
```

The field `decision` is a 1 X 2 structure. Each element of `decision` corresponds to a relational operation in the block. The Saturation block contains two comparisons. The first comparison is with a lower limit and the second with an upper limit. Therefore, `decision` is a 2-element structure.

View the first operation in the block that receives relational boundary coverage. For the Saturation block, the first relational operation is `input > lowerlimit`.

```
covDesc.decision(1)
```

```
ans =
```

```
    outcome: [1x2 struct]  
           text: 'input - lowerlimit'  
    isFiltered: 0  
    filterRationale: ''
```

The `text` field shows the two operands. The `isFiltered` field is set to 1 if the block is filtered from relational boundary coverage. For more information, see “Coverage Filtering”.

View results for the first relational operation in the block.

```
for(i=1:2)  
    covDesc.decision(1).outcome(i)  
end
```

```
ans =
```

```
    isActive: 1  
    execCount: 0  
    text: '[-tol..0]'
```

```
ans =
```

```
    isActive: 1  
    execCount: 0  
    text: '(0..tol]'
```

View the second operation in the block that receives relational boundary coverage. For the Saturation block, the second relational operation is `input < upperlimit`.

```
covDesc.decision(2)
```

```
ans =
    outcome: [1x2 struct]
           text: 'input - upperlimit'
    isFiltered: 0
    filterRationale: ''
```

View results for the second relational operation in the block.

```
for(i=1:2)
    covDesc.decision(2).outcome(i)
end
```

```
ans =
    isActive: 1
    execCount: 1
           text: '[-tol..0)'
```

```
ans =
    isActive: 1
    execCount: 2
           text: '[0..tol]'
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a cvdata object.

Data Types: cvdata

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
BlockPath	Full path to a model or block
BlockHandle	Handle to a model or block
slObj	Handle to a Simulink API object
sfID	Stateflow ID
sfObj	Handle to a Stateflow API object from a singly instantiated Stateflow chart
{BlockPath, sfID}	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

Object Specification	Description
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

simMode — Simulation mode

character array | string array

Simulation mode during coverage analysis, specified as one of the following:

Object Specification	Description
'Normal'	Model in normal simulation mode.
'SIL' (or 'PIL')	Model in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefSIL' (or 'ModelRefPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode.
'ModelRefTopSIL' (or 'ModelRefTopPIL')	Model reference in software-in-the-loop (SIL) or processor-in-the-loop (PIL) simulation mode with the code interface set to top model.

Data Types: char | string

ignore_descendants — Whether to ignore descendants in coverage results

0 (default) | 1

Whether to ignore descendants in coverage results, specified as 0 or 1, where:

- 0 includes coverage results of descendant objects.
- 1 ignores coverage results of descendant objects.

Data Types: single | double

Output Arguments**covInfo — Coverage information**

scalar | []

Coverage information, returned as a two-element array of the form [covered_outcomes, total_outcomes] if cvdo contains relational boundary coverage data, or an empty array if it does not.

covered_outcomes	Number of relational boundary outcomes satisfied for object
total_outcomes	Total number of relational boundary outcomes for object

Data Types: double

description — Textual description of coverage outcomes

structure array

Textual description of coverage outcomes for the model component specified by object, returned as a structure array. Depending on the types of model coverage collected, the structure array can have different fields. If only relational boundary coverage is collected, the structure array contains the following fields:

isFiltered	0 if the model component specified by object is not excluded from coverage recording. 1 if the model component specified by object is excluded from coverage recording. For more information about excluding objects from coverage, see “Coverage Filtering”.
decision.text	Character vector or string of the form: <i>op_1-op_2</i> <ul style="list-style-type: none"> • <i>op_1</i> is the left operand in the relational operation. • <i>op_2</i> is the right operand in the relational operation.

<code>decision.outcome</code>	Structure array containing two fields for each coverage outcome: <table> <tr> <td><code>isActive</code></td> <td>Boolean variable. If this variable is <code>false</code>, it indicates that decisions were not evaluated during simulation due to variable signal size.</td> </tr> <tr> <td><code>execCount</code></td> <td>Number of times <code>op_1-op_2</code> fell in the range described by <code>text</code></td> </tr> <tr> <td><code>text</code></td> <td>The range around the relational boundary considered for coverage. For more information, see “Relational Boundary”.</td> </tr> </table>	<code>isActive</code>	Boolean variable. If this variable is <code>false</code> , it indicates that decisions were not evaluated during simulation due to variable signal size.	<code>execCount</code>	Number of times <code>op_1-op_2</code> fell in the range described by <code>text</code>	<code>text</code>	The range around the relational boundary considered for coverage. For more information, see “Relational Boundary”.
<code>isActive</code>	Boolean variable. If this variable is <code>false</code> , it indicates that decisions were not evaluated during simulation due to variable signal size.						
<code>execCount</code>	Number of times <code>op_1-op_2</code> fell in the range described by <code>text</code>						
<code>text</code>	The range around the relational boundary considered for coverage. For more information, see “Relational Boundary”.						
<code>decision.isFiltered</code>	0 if the model component specified by <code>object</code> is not excluded from coverage recording. 1 if the model component specified by <code>object</code> is excluded from coverage recording. For more information about excluding objects from coverage, see “Coverage Filtering”.						
<code>decision.filterRationale</code>	Rationale for filtering the model component specified by <code>object</code> , if <code>object</code> is excluded from coverage and a rationale is specified. For more information about excluding objects from coverage, see “Coverage Filtering”.						

Data Types: `struct`

Version History

Introduced in R2014b

See Also

`cvtest` | `cvsim` | `decisioninfo` | `complexityinfo` | `conditioninfo` | `getCoverageInfo` | `mcdcinfo` | `sigrangeinfo` | `sigsizeinfo` | `tableinfo` | `overflowsaturationinfo` | `executioninfo` | `relationalboundaryinfo`

Topics

“Command Line Verification Tutorial”
 “Relational Boundary Coverage”

sigrangeinfo

Retrieve signal range coverage information from cvdata object

Syntax

```
[min,max] = sigrangeinfo(cvdo,modelObject)
[min,max] = sigrangeinfo(cvdo,modelObject,portID)
```

Description

`[min,max] = sigrangeinfo(cvdo,modelObject)` returns the minimum and maximum signal values output by the model component `modelObject` within the `cvdata` object `cvdo`.

`[min,max] = sigrangeinfo(cvdo,modelObject,portID)` returns the minimum and maximum signal values associated with the output port `portID` of the Simulink block `modelObject`.

Examples

Collect Signal Range Data for a Block

This example shows how to extract signal range info from a coverage data object.

Load the model and set up coverage options

Load the model into memory. This example uses a small controller model.

```
modelName = 'slvndemo_cv_small_controller';
load_system(modelName)
```

Declare coverage settings using a structure of parameter names and values. For a complete list of coverage parameters and their possible values, see “Coverage Settings” on page 2-2.

```
covOpts.CovEnable = 'on';
covOpts.CovSaveSingleToWorkspaceVar = 'on';
covOpts.CovSaveName = 'covData';
covOpts.CovMetricSignalRange = 'on';
```

Simulate the model using `sim` with the model name and the parameter structure as inputs.

```
simOut = sim(modelName,covOpts);
```

Get signal range data

Get the block handle of the Product block using `get_param`.

```
bHandle = get_param([modelName, '/Product'], 'Handle');
```

Get the signal range data by calling `sigrangeinfo` with the `cvdata` object and the block handle as inputs.

```
[minVal, maxVal] = sigrangeinfo(covData,bHandle)
```

```
minVal =
    0

maxVal =
    25.0000
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a cvdata object.

Data Types: cvdata

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
BlockPath	Full path to a model or block
BlockHandle	Handle to a model or block
sObj	Handle to a Simulink API object
sfID	Stateflow ID
sfObj	Handle to a Stateflow API object from a singly instantiated Stateflow chart
{BlockPath, sfID}	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file

Object Specification	Description
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

portID — Output port of the block

character array | string array

Output port of the block, specified as a character array or a string array.

Data Types: char | string

Output Arguments

max — Maximum signal value output by model object

scalar (default) | -Inf

Maximum signal value output by the model object, returned as a scalar. If modelObject output is a vector, max is also a vector.

If a block is not executed, sigrangeinfo returns -Inf for the max value of that block.

Data Types: double

min — Minimum signal value output by model object

scalar (default) | +Inf

Minimum signal value output by the model object, returned as a scalar. If modelObject output is a vector, max is also a vector.

If a block is not executed, sigrangeinfo returns +Inf for the min value of that block.

Data Types: double

Alternatives

Use the coverage settings to collect signal range coverage for a model:

- 1 Open the model for which you want to collect signal range coverage.
- 2 In the Model Editor, select **Model Settings** on the **Modeling** tab.
- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **Signal Range**.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model by clicking the **Run** button and review the results.

Version History

Introduced in R2006b

See Also

`complexityinfo` | `conditioninfo` | `cvsim` | `decisioninfo` | `getCoverageInfo` | `mcdcinfo` | `overflowsaturationinfo` | `sigsizeinfo` | `tableinfo` | `executioninfo` | `relationalboundaryinfo`

sigsizeinfo

Retrieve signal size coverage information from cvdata object

Syntax

```
[min,max,allocated] = sigsizeinfo(cvdo,modelObject)
[min,max,allocated] = sigsizeinfo(cvdo,modelObject,portID)
```

Description

`[min,max,allocated] = sigsizeinfo(cvdo,modelObject)` returns the minimum, maximum, and allocated signal sizes for the outputs of model component `modelObject` within the coverage data object `cvdo`, if `modelObject` supports variable size signals.

`[min,max,allocated] = sigsizeinfo(cvdo,modelObject,portID)` returns the minimum and maximum signal sizes associated with the output port `portID` of the model component `modelObject`.

Examples

Retrieve Signal Size Information

Collect signal size coverage data for the Switch block in the `sldemo_varsize_basic` model:

```
mdl = 'sldemo_varsize_basic';
open_system(mdl);
%Create test spec object
testObj = cvtest(mdl);
%Enable signal size coverage
testObj.settings.sigsize=1;
%Simulate the model
data = cvsim(testObj);
%Set the block handle
blk_handle = get_param([mdl, '/Switch'], 'Handle');
%Get signal size data
[minVal, maxVal, allocVal] = sigsizeinfo(data, blk_handle);
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a cvdata object.

Data Types: cvdata

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
BlockPath	Full path to a model or block
BlockHandle	Handle to a model or block
slObj	Handle to a Simulink API object
sfID	Stateflow ID
sfObj	Handle to a Stateflow API object from a singly instantiated Stateflow chart
{BlockPath, sfID}	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

portID — Output port of the block

character array | string array

Output port of the block, specified as a character array or a string array.

Data Types: char | string

Output Arguments

max — Maximum signal value output by model object

double

Maximum signal value output by the model object, returned as a scalar. If `modelObject` output is a vector, `max` is also a vector.

Data Types: double

min — Minimum signal value output by model object

double

Minimum signal value output by the model object, returned as a scalar. If `modelObject` output is a vector, `min` is also a vector.

Data Types: double

allocated — Allocated signal size output by model object

double

Allocated signal size output by the model object, returned as a scalar. If `modelObject` has multiple outputs, `allocated` is a vector that contains the allocated signal size for each output.

Data Types: double

Alternatives

Use the coverage settings to collect signal size coverage for a model:

- 1 Open the model for which you want to collect signal size coverage.
- 2 In the Simulink Editor, select **Model Settings** on the **Modeling** tab.
- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **Signal Size**.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model by clicking the **Run** button and review the results.

Version History

Introduced in R2010b

See Also

`complexityinfo` | `conditioninfo` | `cvsim` | `decisioninfo` | `mcxdcinfo` | `sigrangeinfo` | `tableinfo` | `executioninfo` | `relationalboundaryinfo` | `overflowsaturationinfo` | `getCoverageInfo`

slvnvextract

Extract atomic subsystem or subchart contents into new model

Syntax

```
newModel = slvnvextract(subcomponent)
newModel = slvnvextract(subcomponent,showModel)

newModel = slvnvextract(modelmissingslfunctiondef)

newModel = slvnvextract(modelmissingslfunctiondef, showModel)
```

Description

`newModel = slvnvextract(subcomponent)` extracts the contents of the Atomic Subsystem block or atomic subchart subcomponent and creates a model. `slvnvextract` returns the name of the new model in `newModel`. If the model name already exists, `slvnvextract` uses the subsystem or subchart name for the model name, appending a numeral to the model name.

Note If an atomic subchart calls an exported graphical function that is outside the subchart, `slvnvextract` creates the model, but the new model does not compile.

`newModel = slvnvextract(subcomponent, showModel)` opens the extracted model if you set `showModel` to `true`. The extracted model is loaded only if you set `showModel` to `false`.

`newModel = slvnvextract(modelmissingslfunctiondef)` extracts a stub model for the model `modelmissingslfunctiondef` which has missing Simulink function definitions for the Simulink Design Verifier to analyze. Returns the name of the new model in `newModel`. `sldvextract` uses the input model name with a suffix `SldvStub` for the extracted model name, appending a numeral to the model name if that model name already exists.

`newModel = slvnvextract(modelmissingslfunctiondef, showModel)` opens the extracted model if you set `showModel` to `true`. Extracted model will be only loaded if `showModel` is set to `false`.

Examples

Extract Atomic Subsystem to New Model

This example shows how to extract an atomic subsystem from a model and copy it to a new model using `slvnvextract`.


Load the `sldemo_lct_bus` model.

```
modelName = 'slcoverage_lct_bus';
load_system(modelName);
load slcoverage_lct_data.mat
```


Extract the Mode Logic atomic subchart from the model and copy it into a new model.

```
newModel = slvnvextract([modelName, '/Mode Logic'],true)
```

```
newModel =  
    'ModeLogic'
```

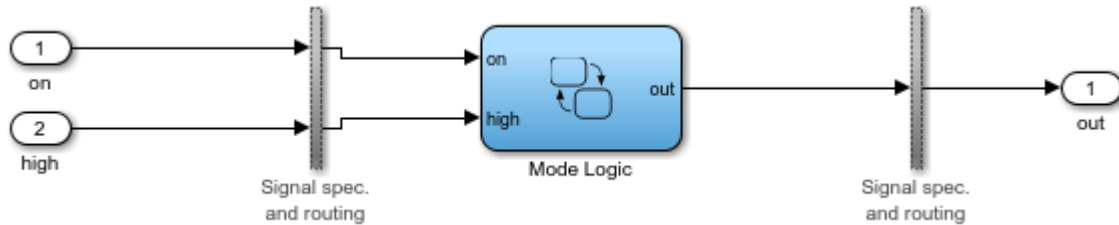

Input Arguments

subcomponent — Subsystem or subchart whose contents are extracted

character vector or string

The full path to the atomic subsystem or atomic subchart whose contents are extracted.

showModel — Display extracted model

true (default) | false

Specify if you want the extracted model to be displayed.

modelmissingslfunctiondef — Missing Simulink function

character vector | string scalar

Full path to the missing Simulink function model, specified as a character vector or string scalar.

Output Arguments

newModel — The name of the new extracted model

character vector or string

Reports the name of the new extracted model created by `slvnvextract`.

Version History

Introduced in R2010b

slvnharnessopts

Generate default options for slvnmakeharness

Syntax

```
harnessopts = slvnharnessopts
```

Description

`harnessopts = slvnharnessopts` generates the default configuration for running `slvnmakeharness`.


Examples

Create a Coverage Harness with Default Options

This example shows how to set harness options for a coverage harness.

Open the model using `open_system`.

```
open_system('slvndemo_counter')
```

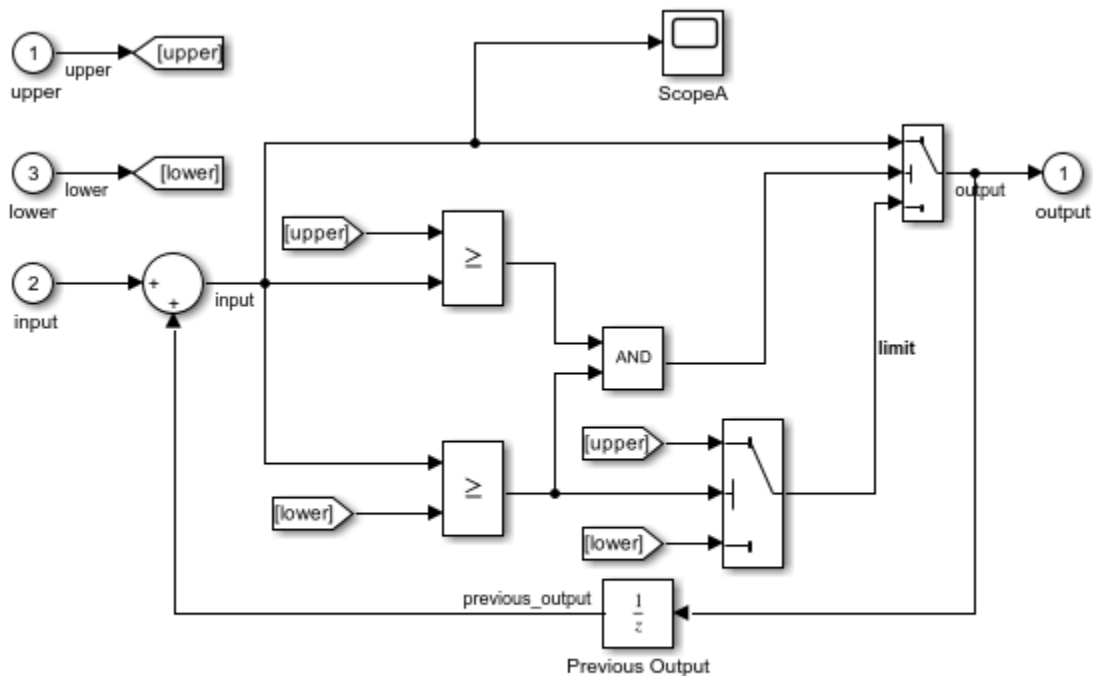

Copyright 2015 The MathWorks, Inc.


Create the harness options object using `slvnharnessopts`.

```
harnessOpts = slvnharnessopts
```

```
harnessOpts =
    struct with fields:
        harnessFilePath: ''
        modelRefHarness: 1
        usedSignalsOnly: 0
        harnessSource: 'Signal Editor'
```

Use the `harnessOpts` to create the harness file using `slvnvmakeharness`.

```
harnessFile = slvnvmakeharness('slvnvdemo_counter', ...
    '', harnessOpts);
```

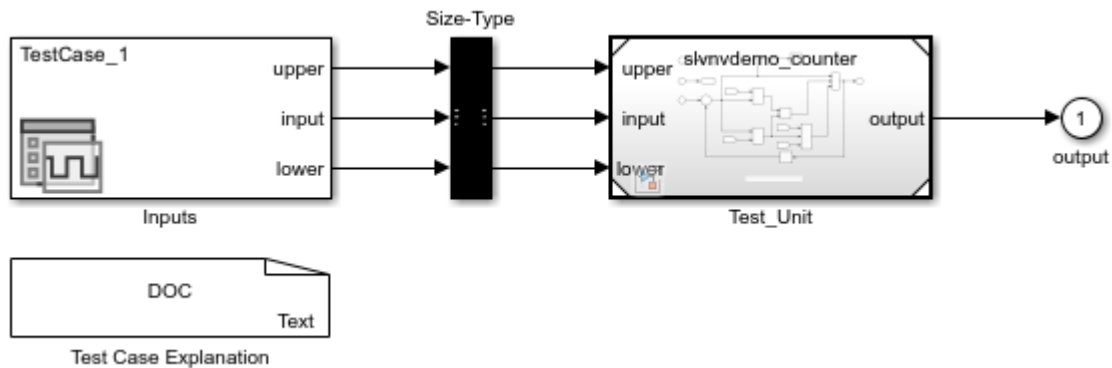

Output Arguments

harnessopts — Default harness options

structure

Default harness options, returned as a structure. The `harnessopts` structure has the following fields. If you do not specify any values, default values are used.

Field	Description
<code>harnessFilePath</code>	Specifies the file path for creating the harness model. If an invalid path is specified, <code>slvnvmakeharness</code> does not save the harness model, but it creates and opens the harness model. If you do not specify this option, <code>slvnvmakeharness</code> generates a new harness model and saves it in the MATLAB current folder. Default: ''
<code>modelRefHarness</code>	Generates the test harness model that includes <code>model</code> in a Model block. When <code>false</code> , the test harness model includes a copy of <code>model</code> . Default: <code>true</code>

Field	Description
usedSignalsOnly	When true, the Signal Editor block in the harness model has signals only for input signals in the model. You must have the Simulink Design Verifier software and model must be compatible with that software to detect the input signals. Default: false

Version History

Introduced in R2010b

See Also

slvnvmakeharness

slvnvlogsignals

Log test data for component or model during simulation

Syntax

```
data = slvnvlogsignals(model_block)
data = slvnvlogsignals(harness_model)
data = slvnvlogsignals(harness_model, test_case_index)
```

Description

`data = slvnvlogsignals(model_block)` simulates the model that contains `model_block` and logs the input signals to the `model_block` block. `model_block` must be a Simulink Model block.

`data = slvnvlogsignals(harness_model)` simulates every test case in `harness_model` and logs the input signals to the Test Unit block in the harness model. Generate `harness_model` by using the Simulink Design Verifier analysis, `sldvmakeharness`, or `slvnvmakeharness`.

`data = slvnvlogsignals(harness_model, test_case_index)` simulates every test case in the Signal Editor block of the `harness_model` specified by `test_case_index`. `slvnvlogsignals` logs the input signals to the Test Unit block in the harness model. If you omit `test_case_index`, `slvnvlogsignals` simulates every test case in the Signal Editor.

Examples

Log and Visualize Simulation Data

This example shows how to log simulation data for a Model block and use the logged data to create a harness model and visualize the data in the referenced model.

Open the directory that contains the example files.

```
openExample('ComponentBasedModelingWithModelReferenceExample')
```

Open the model and log the signals for the CounterB block.

```
open_system('sldemo_mdref_basic');
data = slvnvlogsignals('sldemo_mdref_basic/CounterB');
```

Create a harness model for `sldemo_mdref_counter` using the logged data and the default harness options.

```
load_system('sldemo_mdref_counter');
harnessOpts = slvnvharnessopts
[harnessFilePath] = ...
```

```
slvnlvmakeharness('sldemo_mdref_counter', data, ...  
harness0pts);
```

Input Arguments

model_block — Component or model

character vector or string | handle

The full block path name or handle to a Simulink Model block, specified as a character vector or string.

harness_model — Harness name

character vector or string | handle

Name or handle to a harness model that the Simulink Design Verifier software, `sldvmakeharness`, or `slvnlvmakeharness` creates, specified as a character vector or string.

test_case_index — Indices of test cases to be simulated

scalar

Array of integers that specifies which test cases in the Signal Editor block of the harness model to simulate.

Output Arguments

data — Output data

structure

Structure that contains the logged data.

Version History

Introduced in R2010b

See Also

`sldvmakeharness` | `slvnlvruncgvtest` | `slvnlvruntest` | `slvnlvmakeharness`

slvnvmakeharness

Generate Simulink Coverage harness model

Syntax

```
harnessFilePath = slvnvmakeharness(model)
harnessFilePath = slvnvmakeharness(model,dataFile)
harnessFilePath = slvnvmakeharness(model,dataFile,harnessOpts)
```

Description

`harnessFilePath = slvnvmakeharness(model)` generates a test harness from `model`. `slvnvmakeharness` creates a harness model containing the Model block, a Signal Editor block, and a Size-Type conversion block, by default. The test harness includes one default test case that specifies the default values for all input signals.

`harnessFilePath = slvnvmakeharness(model,dataFile)` generates a test harness from the data file `dataFile`.

`harnessFilePath = slvnvmakeharness(model,dataFile,harnessOpts)` generates a test harness from `model` by using the `dataFile` and harness creation options structure `harnessOpts`. Requires '' for `dataFile` if `dataFile` is not available. The default `dataFile` argument creates a test harness with a single test case with default values for the inputs.

Examples

Create a Test Harness Using the Default Options

Create a test harness for the `sldemo_mdref_house` model using the default options:

```
open_system('sldemo_mdref_house');
harnessOpts = slvnvharnessopts;
[harnessfile] = slvnvmakeharness('sldemo_mdref_house', '', harnessOpts);
```

Input Arguments

model — Simulink model

character array | string array | handle

Simulink model, specified as a character array, string array, or model handle.

dataFile — Data structure

'' (default) | structure | character array | string array

Data structure, specified as a structure, or as a character array or string array containing the name of the `.mat` file. Use `slvnvlogsignals` or `slvnvmergedata` to create this structure. The structure contains information about the model, its input and output ports, and any preexisting test signals. Use this input when you have previously logged test data that you want to import into a new test harness.

harnessOpts — Harness options

structure

Harness options, specified as a structure. Use `slvnvharnessopts` to create this structure.

Field	Description
<code>harnessFilePath</code>	Specifies the file path for creating the harness model. If an invalid path is specified, <code>slvnvmakeharness</code> does not save the harness model, but it creates and opens the harness model. If you do not specify this option, the <code>slvnvoptions</code> object is used. Also, <code>slvnvmakeharness</code> generates a new harness model and saves it in the MATLAB current folder. Default: ''
<code>modelRefHarness</code>	Generates the test harness model that includes <code>model</code> in a Model block. When <code>false</code> , the test harness model includes a copy of <code>model</code> . Default: <code>true</code>
<code>usedSignalsOnly</code>	When <code>true</code> , the Signal Editor block in the harness model has signals for input signals in the model. You must have the Simulink Design Verifier software and <code>model</code> must be compatible with that software to detect the input signals. Default: <code>false</code>

Output Arguments**harnessFilePath — Path and file name of harness model**

character array

Path and file name of the harness model, returned as a character array.

Version History

Introduced in R2010b

See Also

`slvnvharnessopts` | `slvnvmergeharness`

slvnmmergedata

Combine test data from data files

Syntax

```
merged_data = slvnmmergedata(data1,data2,...)
```

Description

`merged_data = slvnmmergedata(data1,data2,...)` combines two or more test cases and counterexamples data into a single test case data structure `merged_data`.

Examples

Log Signals and Merge Logged Data

This example shows how to merge logged data from multiple test cases.

Open the directory that contains the example files.

```
openExample('ComponentBasedModelingWithModelReferenceExample')
```

Open the `sldemo_mdhref_basic` model, which contains three Model blocks that reference the `sldemo_mdhref_counter` model.

```
open_system('sldemo_mdhref_basic');
```

Log the input signals to the three Model blocks.

```
data1 = slvnmlogsignals('sldemo_mdhref_basic/CounterA');  
data2 = slvnmlogsignals('sldemo_mdhref_basic/CounterB');  
data3 = slvnmlogsignals('sldemo_mdhref_basic/CounterC');
```

Merge the logged data.

```
merged_data = slvnmmergedata(data1, data2, data3);
```

Simulate the referenced model, `sldemo_mdhref_counter`, with coverage enabled with the merged data.

```
open_system('sldemo_mdhref_counter');  
run0pts = slvnmruntestopts;  
run0pts.coverageEnabled = true;  
[ outData, initialCov ] = slvnmruntest('sldemo_mdhref_counter', ...  
    merged_data, run0pts);
```

Generate a coverage report to view the results.

```
cvhtml('Initial coverage', initialCov);
```

Input Arguments

data — Structure that contains test case or counterexample data structure

Generated by running `slvnvlogsignals` or by running a Simulink Design Verifier analysis.

Output Arguments

merged_data – The merged test cases or counterexamples
structure

Structure that contains the merged test cases or counterexamples.

Version History

Introduced in R2011a

See Also

`sldvrun` | `slvnvlogsignals` | `slvnvmakeharness` | `slvnvruncgvttest` | `slvnvruntest`

slvnvmergeharness

Combine test data from harness models

Syntax

```
status = slvnvmergeharness(name,models,initialization_commands)
```

Description

`status = slvnvmergeharness(name,models,initialization_commands)` collects the test data and initialization commands from each test harness model and saves them in a handle to the new model.

`slvnvmergeharness` assumes that `name` and the rest of the models in `models` have only one Signal Editor block on the top level. If a model in `models` does not meet this restriction or its top-level Signal Editor block does not have the same number of signals as the top-level Signal Editor block in `name`, `slvnvmergeharness` does not merge that model's test data into `name`.

Examples

Log Signals and Merge Test Harnesses

This example shows how to merge multiple test harnesses.

Open the directory that contains the example files.

```
openExample('ComponentBasedModelingWithModelReferenceExample')
```

Log the input signals to the three Model blocks in the `sldemo_mdhref_basic` example model.

```
open_system('sldemo_mdhref_basic');
data1 = slvnvlogsignals('sldemo_mdhref_basic/CounterA');
data2 = slvnvlogsignals('sldemo_mdhref_basic/CounterB');
data3 = slvnvlogsignals('sldemo_mdhref_basic/CounterC');
open_system('sldemo_mdhref_counter');
```

Create three test harnesses using the logged signals.

```
harness1FilePath = slvnvmakeharness('sldemo_mdhref_counter', data1);
harness2FilePath = slvnvmakeharness('sldemo_mdhref_counter', data2);
harness3FilePath = slvnvmakeharness('sldemo_mdhref_counter', data3)
[~, harness1] = fileparts(harness1FilePath);
[~, harness2] = fileparts(harness2FilePath);
[~, harness3] = fileparts(harness3FilePath);
```

Merge the three test harnesses.

```
slvnvmergeharness('new_harness_model',{harness1, harness2, harness3});
```

Input Arguments

name — Name of the new harness model, to be stored in the default MATLAB folder
character vector or string

If `name` does not exist, `slvnvmergeharness` creates it as a copy of the first model in `models`. `slvnvmergeharness` then merges data from other models listed in `models` into this model. If you create `name` from a previous `slvnvmergeharness` run, subsequent runs of `slvnvmergeharness` for `name` maintain the structure and initialization from the earlier run. If `name` matches an existing Simulink model, `slvnvmergeharness` merges the test data from `models` into `name`.

models — Harness model names

cell array of character vectors or strings

Names of harness models that are inputs to `slvnvmergeharness`.

initialization_commands — Parameter settings for the test cases of each test harness model

cell array of character vectors or strings

Parameter settings for the test cases of each test harness model, specified as a cell array of character vectors or strings that are the same length as `models`. It defines parameter settings for the test cases of each test harness model.

Output Arguments

status — Status of data and initialization commands getting saved

1 | 0

`slvnvmergeharness` returns a `status` of 1 if the data and initialization commands are saved in `name`. Otherwise, it returns 0.

Version History

Introduced in R2010b

See Also

`slvnvlogsignals` | `slvnvmakeharness`

slvnvruncgvtest

Use Code Generation Verification (CGV) API to execute model

Syntax

```
cgvObject = slvnvruncgvtest(model, dataFile)
cgvObject = slvnvruncgvtest(model, dataFile, runOpts)
```

Description

`cgvObject = slvnvruncgvtest(model, dataFile)` invokes the Code Generation Verification (CGV) API methods and executes the `model` by using all test cases in `dataFile`. `cgvObject` is a `cgv.CGV` object that `slvnvruncgvtest` creates during the execution of the `model`. `slvnvruncgvtest` sets the execution mode for `cgvObject` to 'sim' by default.

`cgvObject = slvnvruncgvtest(model, dataFile, runOpts)` invokes CGV API methods and executes the `model` by using test cases in `dataFile`. `runOpts` defines the options for executing the test cases. The settings in `runOpts` determine the configuration of `cgvObject`.

Examples

Log Signals, Run Tests, and Compare Results by Using the CGV API

This example shows how to log signals, run tests, and compare results for generated code using the code generation API.

Open the directory that contains the example files.

```
openExample('ComponentBasedModelingWithModelReferenceExample')
```

Open the `sldemo_mdref_basic` example model and log the input signals to the CounterA model block.

```
open_system('sldemo_mdref_basic');
load_system('sldemo_mdref_counter');
loggedData = slvnvlogsigs('sldemo_mdref_basic/CounterA');
```

Create the default configuration object for `slvnvruncgvtest` and allow the model to be configured to execute test cases with the CGV API.

```
runOpts = slvnvruntestopts('cgv');
runOpts.allowCopyModel = true;
```

Execute the test using the logged signals first in normal mode, and then in software-in-the-loop (SIL) mode.

```
cgvObjectSim = slvnvruncgvtest('sldemo_mdref_counter', loggedData, runOpts);
runOpts.cgvConn = 'sil';
cgvObjectSil = slvnvruncgvtest('sldemo_mdref_counter', loggedData, runOpts);
```

Compare the results of the first test case.

```
simout = cgvObjectSim.getOutputData(1);
silout = cgvObjectSil.getOutputData(1);
```

```
[matchNames, ~, mismatchNames, ~ ] = cgV.CGV.compare(simout, silout);
fprintf('\nTest Case:  %d Signals match, %d Signals mismatch', ...
        length(matchNames), length(mismatchNames));
```

Input Arguments

model — Model name

character vector or string

Model name, specified as a character array or string.

dataFile — Input data file name

structure | character array | string

Input data file name, specified as a structure, a character array, or a string. Generate data by either:

- Using the Simulink Design Verifier software to analyze the model.
- Using the `slvnvlogssignals` function.

runOpts — Simulation run options

structure

Simulation run options, specified as a structure array. The fields of `runOpts` specify the configuration of `slvnvruncgvttest`.

Field Name	Description
<code>testIdx</code>	Test case index array to simulate from <code>dataFile</code> . If <code>testIdx = []</code> (the default), <code>slvnvruncgvttest</code> simulates all test cases.
<code>allowCopyModel</code>	If you have not configured your model to execute test cases with the CGV API, this field specifies creating and configuring the model. If <code>true</code> and you have not configured your <code>model</code> to execute test cases with the CGV API, <code>slvnvruncgvttest</code> copies the model, fixes the configuration, and executes the test cases on the copied model. If <code>false</code> (the default), an error occurs if the tests cannot execute with the CGV API. Note If you have not configured the top-level model or any referenced models to execute test cases, <code>slvnvruncgvttest</code> does not copy the model, even if <code>allowCopyModel</code> is <code>true</code> . An error occurs.
<code>cgvCompType</code>	Defines the software-in-the-loop (SIL) or processor-in-the-loop (PIL) approach for CGV: <ul style="list-style-type: none"> • <code>'topmodel'</code> (default) • <code>'modelblock'</code>

Field Name	Description
cgvConn	Specifies mode of execution for CGV: <ul style="list-style-type: none"> 'sim' (default) 'sil' 'pil'

Note `runOpts = slvnvruntestopts('cgv')` returns a `runOpts` structure with the default values for each field.

Output Arguments

cgvObject — Code generation verification analysis results

`cgv.CGV` object

Code generation verification analysis results, returned as a `cgv.CGV` object.

`slvnvruncgvttest` saves the following data for each test case executed in an array of `Simulink.SimulationOutput` objects inside `cgvObject`.

Field	Description
<code>tout_slvnvruncgvttest</code>	Simulation time
<code>xout_slvnvruncgvttest</code>	State data
<code>yout_slvnvruncgvttest</code>	Output signal data
<code>logout_slvnvruncgvttest</code>	Signal logging data for: <ul style="list-style-type: none"> Signals connected to outputs Signals that are configured for logging data on the model

Tips

To run `slvnvruncgvttest`, you must have an Embedded Coder® license.

If your model has parameters that are not configured for executing test cases with the CGV API, `slvnvruncgvttest` reports warnings about the invalid parameters. If you see these warnings, do one of the following:

- Modify the invalid parameters and rerun `slvnvruncgvttest`.
- Set `allowCopyModel` in `runOpts` to be `true` and rerun `slvnvruncgvttest`. `slvnvruncgvttest` makes a copy of your model configured for executing test cases, and invokes the CGV API.

You can not run `slvnvruncgvttest` on a model that uses configuration set references. Consider changing your model to contain a copy of the configuration set instead of a reference to it.

Version History

Introduced in R2010b

See Also

`cgv.CGV` | `slvnvlogsignals` | `slvnvruntest` | `slvnvruntestopts`

Topics

“Programmatic Code Generation Verification” (Embedded Coder)

slvnvrntest

Simulate model by using input data

Syntax

```
outData = slvnvrntest(model, dataFile)
outData = slvnvrntest(model, dataFile, runOpts)
[outData, covData] = slvnvrntest(model, dataFile, runOpts)
```

Description

`outData = slvnvrntest(model, dataFile)` simulates `model` by using all the test cases in `dataFile`. `outData` is an array of `Simulink.SimulationOutput` objects. Each array element contains the simulation output data of the corresponding test case.

`outData = slvnvrntest(model, dataFile, runOpts)` simulates `model` by using all the test cases in `dataFile`. `runOpts` defines the options for simulating the test cases.

`[outData, covData] = slvnvrntest(model, dataFile, runOpts)` simulates `model` by using the test cases in `dataFile`. When the `runOpts` field `coverageEnabled` is `true`, the Simulink Coverage software collects model coverage information during the simulation. `slvnvrntest` returns the coverage data in the `cvdata` object `covData`.

Examples

Analyze the Model and Examine the Output Data with the Simulation Data Inspector

This example shows how to analyze a model for coverage and examine the output data.

Open the directory that contains the example files.

```
openExample('ComponentBasedModelingWithModelReferenceExample')
```

Analyze the `sldemo_mdref_basic` model and log the input signals to the CounterA model block.

```
open_system('sldemo_mdref_basic');
loggedData = slvnvlogssignals('sldemo_mdref_basic/CounterA');
```

Using the logged signals, simulate the model referenced in the Counter block.

```
runOpts = slvnvrntestopts;
runOpts.coverageEnabled = true;
load_system('sldemo_mdref_counter');
[outData] = slvnvrntest('sldemo_mdref_counter',...
    loggedData, runOpts);
```

Examine the output data from the first test case using the Simulation Data Inspector.

```
Simulink.sdi.createRun('Test Case 1 Output', 'namevalue',...
    {'output'}, {outData(1).find('logouts_slvnvrntest')});
Simulink.sdi.view;
```

Input Arguments

model — Simulink model that you simulate

character vector or string | handle

The Simulink model to simulate.

dataFile — Input data

character vector or string | structure

Name of the data file or structure that contains the input data. You can generate `dataFile` with Simulink Design Verifier software, or by running the `slvnvlogsignals` function.

runOpts — Configuration specification

structure

A structure whose fields specify the configuration of `slvnvrntest`.

Field	Description
<code>testIdx</code>	Test case index array to simulate from <code>dataFile</code> . If <code>testIdx</code> is <code>[]</code> , <code>slvnvrntest</code> simulates all test cases. Default: <code>[]</code>
<code>coverageEnabled</code>	If <code>true</code> , specifies that the Simulink Coverage software collects model coverage data during simulation. Default: <code>false</code>
<code>coverageSetting</code>	<code>cvtest</code> object for collecting model coverage. If <code>[]</code> , <code>slvnvrntest</code> uses the existing coverage settings for <code>model</code> . Default: <code>[]</code>
<code>fastRestart</code>	If <code>true</code> , Simulink Coverage uses fast restart mode for model simulation. Default: <code>true</code>
<code>useParallel</code>	If <code>true</code> , Simulink Coverage simulates test cases with parallel computing. This option requires a Parallel Computing Toolbox™ license. Default: <code>false</code>

Output Arguments

outData — Output objects obtained after simulating the test cases

array of `Simulink.SimulationOutput` objects

Each `Simulink.SimulationOutput` object has the following fields.

Field Name	Description
<code>tout_slvnvrntest</code>	Simulation time
<code>xout_slvnvrntest</code>	State data
<code>yout_slvnvrntest</code>	Output signal data
<code>logout_slvnvrntest</code>	Signal logging data for: <ul style="list-style-type: none"> • Signals connected to outputs • Signals that are configured for logging on the model

covData — Object that contains model coverage data

`covdata` object

`covdata` object that contains the model coverage data collected during simulation.

Note `covdata` might reference a file containing the coverage results. The coverage data from the referenced file is automatically loaded into memory when `covdata` is used by a coverage function. This file gets stored in the `sldv_covoutput` folder generated within `sldv_output` folder.

Tips

The `dataFile` that you create with a Simulink Design Verifier analysis or by running `slvnvlogsignals` contains time values and data values. When you simulate a model by using these test cases, you might see missing coverage. This issue occurs when the time values in the `dataFile` are not aligned with the current simulation time step due to numeric calculation differences. You see this issue more frequently with multirate models—models that have multiple sample times.

- For `useParallel`, the following points must be considered when simulating test cases using parallel computing:
 - Starting a parallel pool can take time, which impacts the overall analysis time. To reduce the analysis time:
 - Make sure that the parallel pool is already running before you run a test generation analysis. By default, the parallel pool shuts down after being idle for a specified number of minutes. To change the setting, see “Specify Your Parallel Preferences” (Parallel Computing Toolbox).
 - Load Simulink on all the parallel pool workers.
 - The simulation occurs sequentially when:
 - The cluster is not `local`. Configure parallel preferences to use the `local` cluster only. See “Specify Your Parallel Preferences” (Parallel Computing Toolbox).
 - The model is in `dirty` state prior to launching the SLDV analysis.
 - The model has `ToFile` blocks.
 - The model in Software-in-the-loop (SIL) simulation mode.
 - The model is an internal harness.

Version History

Introduced in R2010b

See Also

`cvsim` | `cvtest` | `sim` | `slvnvrntestopts`

slvnvruntestopts

Generate simulation or execution options for `slvnvruntest` or `slvnvruncgvtest`

Syntax

```
runOpts = slvnvruntestopts
runOpts = slvnvruntestopts('cgv')
```

Description

`runOpts = slvnvruntestopts` generates a `runOpts` structure for `slvnvruntest`.

`runOpts = slvnvruntestopts('cgv')` is a `runOpts` structure for `slvnvruncgvtest`.

Examples

Create runOpts Objects for slvnvruntest and slvnvruncgvtest

```
% Create runOpts objects for slvnvruntest
runtest_opts = slvnvruntestopts;

% Create runOpts objects for slvnvruncgvtest
runcgvtest_opts = slvnvruntestopts('cgv')
```

Output Arguments

runOpts — Configuration specification of `slvnvruntest` or `slvnvruncgvtest`
structure

`runOpts` can have the following fields. If you do not specify a field, `slvnvruncgvtest` or `slvnvruntest` uses the default value.

Field Name	Description
<code>testIdx</code>	<p>Test case index array to simulate or execute from data file.</p> <p>If <code>testIdx = []</code>, all test cases are simulated or executed.</p> <p>Default: <code>[]</code></p>
<code>signalLoggingSaveFormat</code>	<p>Available only for <code>slvnvruntest</code>.</p> <p>Specifies the format of signal logging data for signals that connect to the output of the model and for intermediate signals that are configured for logging.</p> <p>If you specify <code>Dataset</code>, data is stored in the <code>Simulink.SimulationData.Dataset</code> objects.</p> <p>Default: <code>'Dataset'</code></p>

Field Name	Description
coverageEnabled	<p>Available only for slvnvruntest.</p> <p>If true, slvnvruntest collects model coverage data during simulation.</p> <p>Default: false</p>
coverageSetting	<p>Available only for slvnvruntest.</p> <p>cvtest object for collecting model coverage.</p> <p>If coverageSetting is [], slvnvruntest uses the coverage settings for the model specified in the call to slvnvruntest.</p> <p>Default: []</p>
allowCopyModel	<p>Available only for slvnvruncgvtest.</p> <p>If you have not configured your model to execute test cases with the CGV API, this field specifies creating and configuring the model.</p> <p>If true and you have not configured the model to execute test cases with the CGV API, slvnvruncgvtest copies the model, fixes the configuration, and executes the test cases on the copied model.</p> <p>If false, an error occurs if the tests cannot execute with the CGV API.</p> <hr/> <p>Note If you have not configured the top-level model or any referenced models to execute test cases, slvnvruncgvtest does not copy the model, even if allowCopyModel is true. An error occurs.</p> <hr/> <p>Default: false</p>
cgvCompType	<p>Available only for slvnvruncgvtest.</p> <p>Defines the software-in-the-loop (SIL) or processor-in-the-loop (PIL) approach for CGV:</p> <ul style="list-style-type: none"> • 'topmodel' • 'modelblock' <p>Default: 'topmodel'</p>

Field Name	Description
cgvConn	Available only for slvnvruncgvttest. Specifies mode of execution for CGV: <ul style="list-style-type: none">• 'sim'• 'sil'• 'pil' Default: 'sim'
fastRestart	Available only for slvnvruntest. If true, Simulink Coverage uses fast restart mode for model simulation. Default: true
useParallel	Available only for slvnvruntest. If true, Simulink Coverage simulates test cases with parallel computing. This option requires a Parallel Computing Toolbox license. Default: false

Version History

Introduced in R2010b

See Also

slvnvruncgvttest | slvnvruntest

slwebview_cov

Export Simulink models to Web views with coverage

Syntax

```
filename = slwebview_cov(sysname)
filename = slwebview_cov(sysname,Name,Value)
```

Description

`filename = slwebview_cov(sysname)` exports the system `sysname` and its children to a web page `filename` with contextual coverage information for the system displayed on a separate panel of the layered model structure Web view.

`filename = slwebview_cov(sysname,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments.

Note You can use `slwebview_cov` only if you have also installed Simulink Report Generator™.

Examples

Export All Layers

Export all the layers (including libraries and masks) from the system `gcs` to the file `filename`

```
filename = slwebview_cov(gcs,'LookUnderMasks','all','FollowLinks','on')
```

Input Arguments

sysname — The system to export to a Web view file

character vector or string containing the path to the system | handle to a subsystem or block diagram
| handle to a chart or subchart

Exports the specified system or subsystem and its child systems to a Web view file, with contextual coverage information for the system displayed on a separate panel of the layered model structure Web view. By default, child systems of the `sysname` system are also exported. Use the `SearchScope` name-value pair to export other systems, in relation to `sysname`.

Example: 'sysname'

Name-Value Pair Arguments

Specify optional pairs of arguments as `Name1=Value1, ..., NameN=ValueN`, where `Name` is the argument name and `Value` is the corresponding value. Name-value arguments must appear after other arguments, but the order of the pairs does not matter.

Before R2021a, use commas to separate each name and value, and enclose Name in quotes.

Example:

```
slwebview_cov(gcs, 'SearchScope', 'CurrentAndBelow', 'LookUnderMasks', 'all', 'FollowLinks', 'on')
```

SearchScope — Systems to export, relative to the sysname system

'CurrentAndBelow' (default) | 'Current' | 'CurrentAndAbove' | 'All'

'CurrentAndBelow' exports the Simulink system or the Stateflow chart specified by sysname and all systems or charts that it contains.

'Current' exports only the Simulink system or the Stateflow chart specified by sysname.

'CurrentAndAbove' exports the Simulink system or the Stateflow chart specified by the sysname and all systems or charts that contain it.

'All' exports all Simulink systems or Stateflow charts in the model that contains the system or chart specified by sysname.

Data Types: char

LookUnderMasks — Specifies whether to export the ability to interact with masked blocks

'none' (default) | 'all'

'none' does not export masked blocks in the Web view. Masked blocks are included in the exported systems, but you cannot access the contents of the masked blocks.

'all' exports all masked blocks.

Data Types: char

FollowLinks — Specifies whether to follow links into library blocks

'off' (default) | 'on'

'off' does not allow you to follow links into library blocks in a Web view.

'on' allows you to follow links into library blocks in a Web view.

Data Types: char

FollowModelReference — Specifies whether to access referenced models in a Web view

'off' (default) | 'on'

'off' does not allow you to access referenced models in a Web view.

'on' allows you to access referenced models in a Web view.

Data Types: char

ViewFile — Specifies whether to display the Web view in a Web browser when you export the Web view

'on' (default) | 'off'

'on' displays the Web view in a Web browser when you export the Web view.

'off' does not display the Web view in a Web browser when you export the Web view.

Data Types: char

ShowProgressBar — Specifies whether to display the status bar when you export a Web view`'on'` (default) | `'off'`

`'on'` displays the status bar when you export a Web view.

`'off'` does not display the status bar when you export a Web view.

Data Types: char

CovData — cvdata objects to use`cvdata`

The coverage data to use, specified as the comma-separated pair consisting of `'CovData'` and the `cvdata` objects to use.

Example: `'CovData', covdata`

Output Arguments**filename** — The name of the HTML file for displaying the Web view`character vector or string`

Reports the name of the HTML file for displaying the Web view. Exporting a Web view creates the supporting files, in a folder.

Tips

A Web view is an interactive rendition of a model that you can view in a Web browser. You can navigate a Web view hierarchically to examine specific subsystems and to see properties of blocks and signals.

You can use Web views to share models with people who do not have Simulink installed.

Web views require a Web browser that supports Scalable Vector Graphics (SVG).

Version History**Introduced in R2015a****See Also**`slwebview_req`

tableinfo

Retrieve lookup table coverage information from cvdata object

Syntax

```
covInfo = tableinfo(cvdo,modelObject)
covInfo = tableinfo(cvdo,modelObject,ignore_descendants)
[covInfo,exeCounts] = tableinfo(cvdo,modelObject)
[covInfo,exeCounts,brkEquality] = tableinfo(cvdo,modelObject)
```

Description

`covInfo = tableinfo(cvdo,modelObject)` returns lookup table coverage results from the cvdata object `cvdo` for the model component `modelObject`.

`covInfo = tableinfo(cvdo,modelObject,ignore_descendants)` returns lookup table coverage results for `modelObject`, depending on the value of `ignore_descendants`.

`[covInfo,exeCounts] = tableinfo(cvdo,modelObject)` returns lookup table coverage results and the execution count for each interpolation/extrapolation interval in the lookup table block `modelObject`.

`[covInfo,exeCounts,brkEquality] = tableinfo(cvdo,modelObject)` returns lookup table coverage results, the execution count for each interpolation/extrapolation interval, and the execution counts for breakpoint equality.

Examples

Retrieve Lookup Table Coverage Information

Collect lookup table coverage for the `slvndemo_cv_small_controller` model and determine the percentage of interpolation/extrapolation intervals coverage collected for the Gain Table block in the Gain subsystem:

```
mdl = 'slvndemo_cv_small_controller';
open_system(mdl)
%Create test spec object
testObj = cvtest(mdl)
%Enable lookup table coverage
testObj.settings.tableExec = 1;
%Simulate the model
data = cvsim(testObj)
blk_handle = get_param([mdl, '/Gain/Gain Table'], 'Handle');
%Retrieve l/u table coverage
cov = tableinfo(data, blk_handle)
```

```
%Percent MCDC outcomes covered
percent_cov = 100 * cov(1) / cov(2)
```

Input Arguments

cvdo — Coverage data

cvdata object

Coverage data, specified as a cvdata object.

Data Types: cvdata

modelObject — Model object

character array | string array | Simulink handle | Stateflow ID | cell array

Model object, specified as a character array, string array, Simulink handle, Stateflow ID, or cell array.

To specify a model object, for example a block or a Stateflow chart, use one of the following formats:

Object Specification	Description
BlockPath	Full path to a model or block
BlockHandle	Handle to a model or block
slObj	Handle to a Simulink API object
sfID	Stateflow ID
sfObj	Handle to a Stateflow API object from a singly instantiated Stateflow chart
{BlockPath, sfID}	Cell array with the path to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart
{BlockPath, sfObj}	Cell array with the path to a Stateflow chart or subchart and a Stateflow object API handle contained in that chart or subchart
{BlockHandle, sfID}	Cell array with a handle to a Stateflow chart or atomic subchart and the ID of an object contained in that chart or subchart

To specify an S-Function block or its contents, use one of the following formats:

Object Specification	Description
{BlockPath, fName}	Cell array with the path to an S-Function block and the name of a source file
{BlockHandle, fName}	Cell array with an S-Function block handle and the name of a source file
{BlockPath, fName, funName}	Cell array with the path to an S-Function block, the name of a source file, and a function name
{BlockHandle, fName, funName}	Cell array with an S-Function block handle, the name of a source file and a function name

To specify a code coverage result, for example coverage data collected during software-in-the-loop (SIL) or processor-in-the-loop (PIL) analysis, use one of the following formats:

Object Specification	Description
{fileName, funName}	Cell array with the name of a source file and a function name
{Model, fileName}	Cell array with a model name or model handle and the name of a source file
{Model, fileName, funName}	Cell array with a model name or model handle, the name of a source file, and a function name

Data Types: char | string | cell | Stateflow.State | Stateflow.Transition

ignore_descendants — Whether to ignore descendants in coverage results

0 (default) | 1

Whether to ignore descendants in coverage results, specified as 0 or 1, where:

- 0 includes coverage results of descendant objects.
- 1 ignores coverage results of descendant objects.

Data Types: single | double

Output Arguments

covInfo — Coverage information

scalar

Coverage information, returned as a two-element array of the form [covered_intervals, total_intervals] if cvdo contains lookup table coverage data, or an empty array if it does not.

covered_intervals	Number of interpolation/extrapolation intervals satisfied for modelObject
total_intervals	Total number of interpolation/extrapolation intervals for modelObject

Data Types: double

exeCounts — Execution count

double array

Execution count, returned as an array of doubles. exeCounts contains execution counts for each interpolation and extrapolation interval in the lookup table block. exeCounts has one more entry in each dimension than the lookup table block.

Data Types: double

brkEquality — Breakpoint equality flag

cell array

Breakpoint equality flag, returned as a cell array. Each cell contains a vector which identifies the number of times during simulation the lookup table block input is equivalent to a breakpoint value. Each vector represents the breakpoints along a different lookup table dimension.

Data Types: cell

Alternatives

Use the coverage settings to collect lookup table coverage for a model:

- 1 Open the model.
- 2 In the Model Editor, select **Model Settings** on the **Modeling** tab.
- 3 On the **Coverage** pane of the Configuration Parameters dialog box, select **Enable coverage analysis**.
- 4 Under **Coverage metrics**, select **Lookup Table**.
- 5 Click **OK** to close the Configuration Parameters dialog box and save your changes.
- 6 Simulate the model by clicking the **Run** button and review the results.

Version History

Introduced in R2006b

See Also

[complexityinfo](#) | [conditioninfo](#) | [cvsim](#) | [decisioninfo](#) | [getCoverageInfo](#) | [mcdcinfo](#) | [overflowsaturationinfo](#) | [sigrangeinfo](#) | [sigsizeinfo](#) | [executioninfo](#) | [relationalboundaryinfo](#)

Topics

"Lookup Table Coverage"

slcovmex

Build coverage-compatible MEX-function from C/C++ code

Syntax

```
slcovmex(sourceFile1,...,sourceFileN)
slcovmex(sourceFile1,...,sourceFileN,-sldv)
slcovmex(sourceFile1,...,sourceFileN,Name,Value)
slcovmex(argumentSet1,...,argumentSetN)
```

Description

`slcovmex(sourceFile1,...,sourceFileN)` compiles level 2 C/C++ MEX S-Function to work with coverage.

`slcovmex(sourceFile1,...,sourceFileN,-sldv)` compiles level 2 C/C++ MEX S-Function to work with coverage, and with support enabled for Simulink Design Verifier.

`slcovmex(sourceFile1,...,sourceFileN,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments.

`slcovmex(argumentSet1,...,argumentSetN)` combines several mex function calls, each with one set of arguments.

Input Arguments

sourceFile1,...,sourceFileN — One or more file names

character vectors or strings

Comma-separated source file names with each name specified as a character vector or string.

If the files are not in the current folder, the file names must include the full path or relative path. Use `pwd` to find the current folder and `cd` to change the current folder.

Example: `'file1.c','file1.c','file2.c'`

argumentSet1,...,argumentSetN — One or more sets of mex arguments

cell arrays of character vectors or strings

Comma-separated mex argument sets, with each set specified as a cell array.

If you invoke `mex` multiple times, you can invoke `slcovmex` once and pass the arguments for each mex invocation as a cell array of character vectors.

For example, if you use the following sequence of mex commands:

```
mex -c file1.c
mex -c file2.c
mex file1.o file2.o -output sfcnOutput
```

You can replace the sequence with one `slcovmex` invocation:


```
slcovmex({'-c','file1.c'},{'-c','file2.c'},{'file1.o','file2.o',
'-output','sfcnOutput'})
```

Example: {'-c','file1.c'},{'-c','file2.c'},{'file1.o','file2.o','-output','sfcnOutput'}

-sldv — Option to enable support for Simulink Design Verifier

character vector or string

Option to enable support for your compiled MEX-function in Simulink Design Verifier.

Name-Value Pair Arguments

Specify optional pairs of arguments as `Name1=Value1, . . . ,NameN=ValueN`, where `Name` is the argument name and `Value` is the corresponding value. Name-value arguments must appear after other arguments, but the order of the pairs does not matter.

Before R2021a, use commas to separate each name and value, and enclose Name in quotes.

Example: You can use all the name-value pair arguments that are allowed for the `mex` function. In addition, you can use the following options that are specific to model coverage.

-ifile — File ignored for coverage

character vector or string

File name, specified as a character vector or string.

Example: 'myFile.c'

-ifcn — Function ignored for coverage

character vector or string

Function name, specified as a character vector or string.

Example: 'myFunc'

-idir — Folder ignored for coverage

character vector or string

Folder name, specified as a character vector or string.

All files in the folder are ignored for coverage.

Example: 'C:\Libraries\'

Version History

Introduced in R2015a

See Also

Topics

“Create a Basic C MEX S-Function”

“Templates for C S-Functions”


“Coverage for Custom C/C++ Code in Simulink Models”

“View Coverage Results for Custom C/C++ Code in S-Function Blocks”

Simulink Coverage Settings

Coverage Settings

Basic Coverage Settings

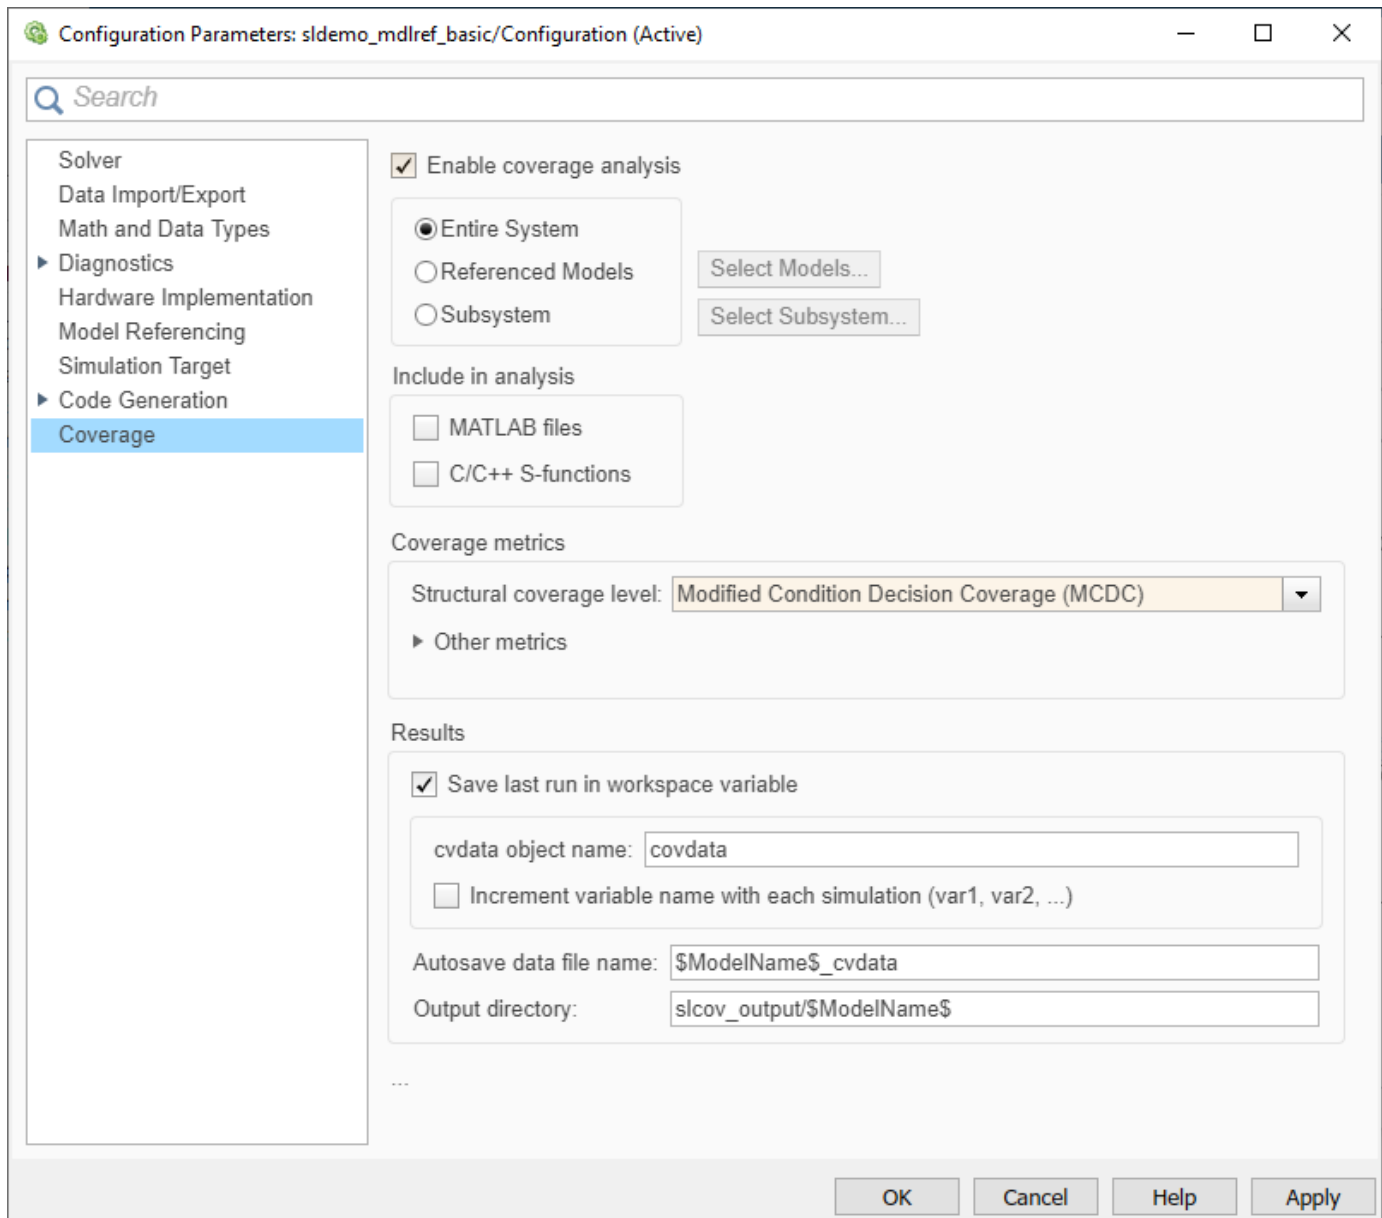

- “Coverage Pane Overview” on page 2-3
- “Enable coverage analysis” on page 2-3
- “Scope of coverage analysis” on page 2-3
- “Select Models” on page 2-4
- “Select Subsystem” on page 2-5
- “Record coverage for MATLAB files” on page 2-5

- “Record coverage for C/C++ S-functions” on page 2-6
- “Structural coverage level” on page 2-6
- “Lookup table” on page 2-7
- “Signal range” on page 2-8
- “Signal size” on page 2-8
- “Objectives and constraints” on page 2-9
- “Saturation on integer overflow” on page 2-9
- “Relational boundary” on page 2-10
- “Relational boundary coverage absolute tolerance” on page 2-10
- “Relational boundary coverage relative tolerance” on page 2-10
- “Save last run in workspace variable” on page 2-11
- “Last coverage run variable name” on page 2-12
- “Increment variable name with each simulation” on page 2-12
- “Autosave data file name” on page 2-13
- “Output directory” on page 2-13

Coverage Pane Overview

Specify the Simulink Coverage analysis options.

Enable coverage analysis

Enable coverage analysis. See “Specify Coverage Options”.

Settings

- On
Coverage data is collected during simulation.
- Off (default)
Coverage data is not collected during simulation.

Command-Line Information

Parameter: CovEnable

Type: Character vector or string

Value: 'on' || 'off'

Default: 'off'

Scope of coverage analysis

Specify whether the analysis must collect coverage data for the entire system, or a specific referenced model, Observer model or subsystem.

Settings

Entire System (default)

Coverage data is collected for the top-level model, as well as all supported subsystems and model references.

Referenced Models

Coverage data is collected for one or more referenced models. To specify the referenced models, use the parameter “Select Models” on page 2-4. You can also specify the top-level model itself.

Subsystem

Coverage data is collected for a specific subsystem. To specify a subsystem, use the parameter “Select Subsystem” on page 2-5.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovScope

Type: Character vector or string

Value: 'EntireSystem' | 'ReferencedModels' | 'Subsystem'

Default: 'EntireSystem'

Select Models

Specify the referenced models for which you want coverage.

Settings

In the **Select Models for Coverage Analysis** dialog box, select the referenced models and Observer models for which you want coverage. You can also select the top-level model. The icon next to the model name indicates the simulation mode: **Normal**, **SIL**, or **PIL**. Only Observer models in **Normal** mode are analyzed for coverage.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- Specify referenced models for “Scope of coverage analysis” on page 2-3.

Command-Line Information

Note Unlike in the user interface, on the command line, you *exclude* models from coverage instead of including them.

Parameter: CovModelRefExcluded

Type: Character vector or string

Value: Comma-separated list of model names, for instance, 'mRefA, mRefB, mRefC'. If the same model is referenced in two simulation modes, you can distinguish between them using :, for instance, 'mRefA:normal, mRefA:sil'.


Default: ''

Select Subsystem

Specify the path to the subsystem for which Simulink Coverage collects coverage data. Specify the path relative to the top model.

Settings

Select the subsystem for which you want coverage.

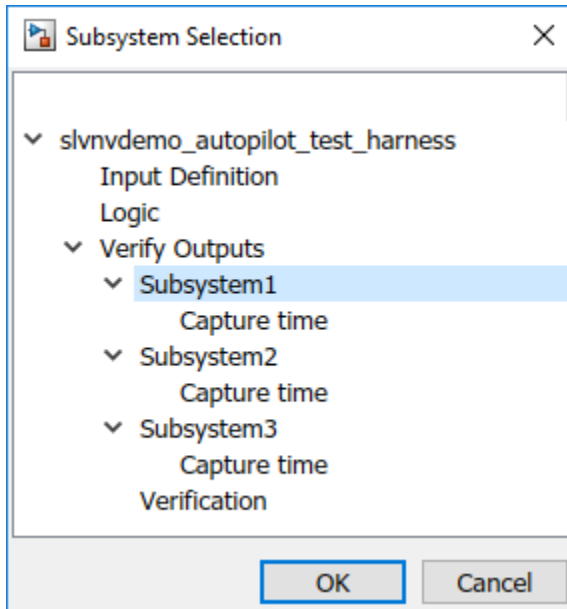

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Scope of coverage analysis” on page 2-3

Command-Line Information

Parameter: CovPath

Type: Character vector or string

Value: Path to subsystem relative to (and excluding) the top-level Simulink system, for instance, 'Subsys1/subsys2'

Default: '/'. Coverage data is reported for the entire system.

Record coverage for MATLAB files

Enable coverage for MATLAB functions in external MATLAB files. The functions can be invoked from MATLAB Function blocks or Stateflow charts in your model. See “Model Coverage for MATLAB Functions”.

Settings

On (default)

Coverage data is collected for MATLAB functions in external MATLAB files. The functions can be called from MATLAB Function blocks or Stateflow charts in the model.

Off

Coverage data is not collected for external MATLAB files.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovExternalEMLEnable

Type: Character vector or string

Value: 'on' | 'off'

Default: 'on'

Record coverage for C/C++ S-functions

Enable coverage for C/C++ code in S-Function blocks in your model. See also “Coverage for Custom C/C++ Code in Simulink Models”.

If your model contains C/C++ S-functions, selecting or clearing **Record coverage for C/C++ S-functions** can cause the coverage checksum to change.

Settings

On (default)

Coverage data is collected for C/C++ code in S-Function blocks in the model.

Off

Coverage data is not collected for C/C++ code used in the model.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Record coverage for this model” on page 2-20 or “Record coverage for referenced models” on page 2-21 (enter on)

Command-Line Information

Parameter: CovSFcnEnable

Type: Character vector or string

Value: 'on' | 'off'

Default: 'on'

Structural coverage level

Select the type of coverage data collected. See also “Types of Model Coverage”.

Settings

Decision (default)

The analysis computes decision coverage during simulation

Decision coverage analysis checks blocks that perform an action based on whether an operation evaluates to true or false. For instance, the Abs block first evaluates if the input is less than zero and acts accordingly. For each operation that can evaluate to true or false, the analysis reports what fraction of the outcomes was true during simulation and what fraction was false.

See “Decision Coverage (DC)”.

Condition/Decision

The analysis computes condition and decision coverage during simulation.

Condition coverage analysis checks blocks that output a logical combination of their inputs (such as Logical Operator blocks). For each block, the analysis records what fraction of the inputs was true during simulation and what fraction was false.

See “Condition Coverage (CC)”.

Modified Condition/Decision Coverage (MCDC)

The analysis computes Modified Condition/Decision Coverage (MCDC) during simulation.

See “Modified Condition/Decision Coverage (MCDC)”.

Block Execution

The analysis checks if each block executes at least once during simulation.

See “Execution Coverage (EC)”.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovMetricStructuralLevel

Type: Character vector or string

Value: 'BlockExecution' | 'ConditionDecision' | 'Decision' | 'MCDC'

Default: 'Decision'

Lookup table

Enable lookup table coverage. See “Types of Model Coverage”.

Settings

On

Blocks with lookup tables are checked for coverage. A test case achieves full coverage of a lookup table if it executes each interval of the table at least once.

Off (default)

Lookup table coverage is not recorded.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovMetricLookupTable

Type: Character vector or string

Value: 'on' || 'off'

Default: 'off'

Signal range

Enable signal range coverage. See “Types of Model Coverage”.

Settings

On

Maximum and minimum signal values are recorded for each block that has an output signal.

Off (default)

Signal range information is not recorded.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovMetricSignalRange

Type: Character vector or string

Value: 'on' || 'off'

Default: 'off'

Signal size

Enable signal size coverage. See “Types of Model Coverage”.

Settings

On

Maximum, minimum and allocated signal size are recorded for each block that has a variable-size output signal. See “Variable-Size Signal Basics”.

Off (default)

Signal size information is not recorded.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovMetricSignalSize

Type: Character vector or string

Value: 'on' || 'off'

Default: 'off'

Objectives and constraints

Enable coverage of objectives and constraints specified in Simulink Design Verifier blocks. See “Types of Model Coverage”.

Settings

On

Through Simulink Design Verifier blocks, you can specify objectives and constraints in your model. To check if these objectives are satisfied, you first generate test cases using these blocks. You can execute these test cases on the original model and record whether the specified objective was satisfied at least once. To record this coverage, enable this parameter.

For an example, see “Simulink Design Verifier Coverage”.

Off (default)

Coverage information is not recorded for Simulink Design Verifier blocks.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovMetricObjectiveConstraint

Type: Character vector or string

Value: 'on'|'off'

Default: 'off'

Saturation on integer overflow

Enable saturation on integer overflow coverage. See “Types of Model Coverage”.

Settings

On

For certain blocks, such as the Abs block, you can specify that they must saturate on integer overflow. If you enable this parameter, the number of times these blocks saturate during simulation is recorded.

Off (default)

Saturation on integer overflow information is not recorded.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovMetricSaturateOnIntegerOverflow

Type: Character vector or string

Value: 'on'|'off'

Default: 'off'

Relational boundary

Enable relational boundary coverage. See “Types of Model Coverage”.

Settings

On

Certain blocks such as the Relational Operator or If block use a relational operation. If you enable this parameter, the coverage analysis checks if these operations are executed with equal (integer) or almost equal (floating-point) values.

Off (default)

Relational boundary coverage information is not recorded.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovMetricRelationalBoundary

Type: Character vector or string

Value: 'on' | 'off'

Default: 'off'

Relational boundary coverage absolute tolerance

Specify the value of absolute tolerance for relational boundary coverage. See “Relational Boundary Coverage”.

Settings

Enter a floating-point value. See “Floating-Point Numbers”.

Relational boundary coverage checks blocks with relational operations (such as the Relational Operator block). The analysis checks if the operations are executed with floating-point operands that differ by at most this value.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Relational boundary” on page 2-10

Command-Line Information

Parameter: CovBoundaryAbsTol

Type: Floating-point number

Value: Absolute tolerance value such as 1e-06

Default: 1e-05

Relational boundary coverage relative tolerance

Specify the value of relative tolerance for relational boundary coverage. See “Relational Boundary Coverage”.

Settings

Enter a number less than 1.

Relational boundary coverage checks blocks with relational operations (such as the Relational Operator block). The analysis checks if the operations are executed with floating-point operands that differ by at most this fraction of the operands.

For instance, if you enter 0.01, the analysis checks if an operation $lhs \leq rhs$ in your model is executed with operands that differ by at most:

$$0.01 * \max(|lhs|, |rhs|)$$

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Relational boundary” on page 2-10

Command-Line Information

Parameter: CovBoundaryRelTol

Type: Floating-point number

Value: Relative tolerance value such as 0.001

Default: 0.01

Save last run in workspace variable

Save the coverage data from simulation in a MATLAB variable.

You can retrieve coverage information from this variable later. For instance, to retrieve decision coverage information, use the `decisioninfo` function. For the full list of functions, see “Manage Coverage Data”.

Settings

On

Coverage data is stored in a `cvdata` object in the MATLAB workspace. Specify the object name using the parameter “Last coverage run variable name” on page 2-12. Choose to create a new object for each simulation using the parameter “Increment variable name with each simulation” on page 2-12.

Off (default)

Coverage data is not stored in a MATLAB variable.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovSaveSingleToWorkspaceVar

Type: Character vector or string

Value: 'on'|'off'

Default: 'off'

Last coverage run variable name

Specify a name for the `cvdata` object that contains coverage results from the last simulation.

Settings

Enter a name, for instance, `coverageData`.

If you want a new variable to store coverage results for each simulation, use the parameter “Increment variable name with each simulation” on page 2-12. The new variable name is created by appending a counter value to the original name, for instance, `coverageData1`, `coverageData2`, and so on.

The default variable name is `covdata`.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Save last run in workspace variable” on page 2-11

Command-Line Information

Parameter: `CovSaveName`

Type: Character vector or string

Value: Name to be given to `cvdata` object

Default: 'covdata'

Increment variable name with each simulation

Create a new variable to store coverage results for each new simulation.

Settings

On

A new `cvdata` object stores coverage results for each simulation.

The new variable name is created by appending a counter value to the original variable name from the first simulation. Specify the original variable name using the parameter “Last coverage run variable name” on page 2-12.

Off (default)

Each new simulation overwrites the coverage results from the previous simulation. A single `cvdata` object stores the coverage results from the most recent simulation.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Save last run in workspace variable” on page 2-11

Command-Line Information

Parameter: CovNameIncrementing

Type: Character vector or string

Value: 'on' || 'off'

Default: 'off'

Autosave data file name

Specify name of .cvt file to which coverage data is automatically saved.

Settings

Enter file name. The default name is \$ModelName\$_cvdata, where \$ModelName\$ is the model name.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Save output data” on page 2-24

Command-Line Information

Parameter: CovDataFileName

Type: Character vector or string

Value: Name to be given to .cvt file

Default: '\$ModelName\$_cvdata'

Output directory

Specify a folder in which coverage output files are saved.

Settings

Enter path to folder. You can enter the absolute path or path relative to the current working folder.

By default, the files are saved in a subfolder slcov_output/\$ModelName\$ relative to the current working folder. Here \$ModelName\$ is the model name.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information


Parameter: CovOutputDir

Type: Character vector or string

Value: Path to folder

Default: 'slcov_output/\$ModelName\$'

Advanced Coverage Settings

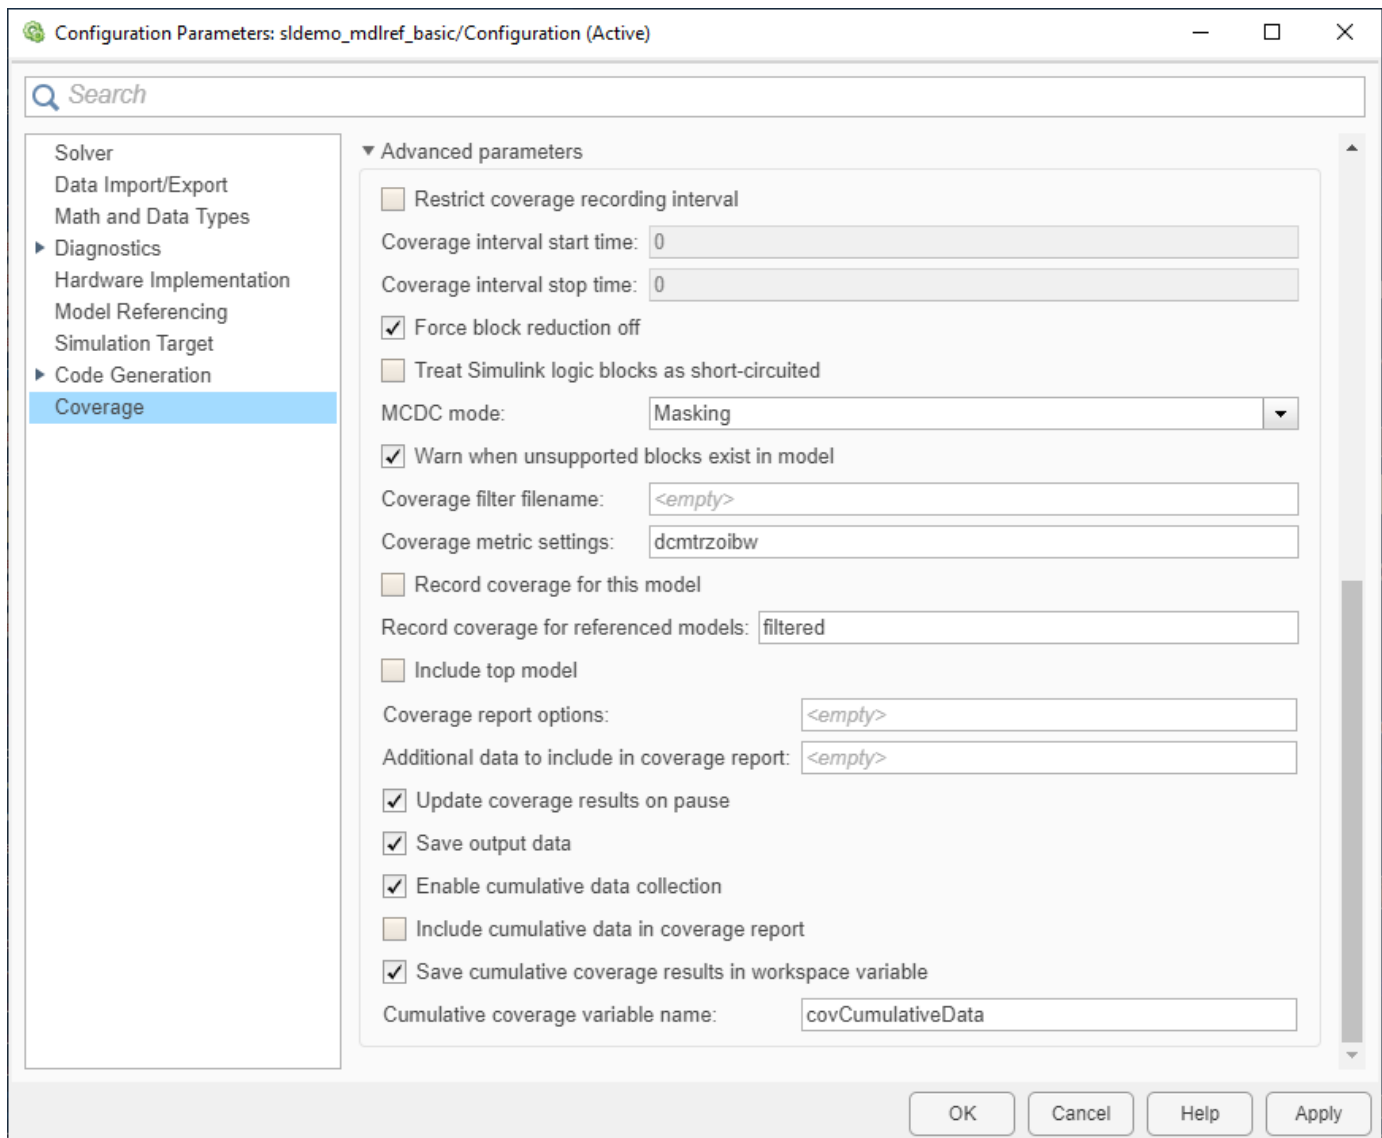

- “Restrict coverage recording interval” on page 2-15
- “Coverage interval start time” on page 2-15
- “Coverage interval stop time” on page 2-16
- “Force block reduction off” on page 2-16
- “Treat Simulink logic blocks as short-circuited” on page 2-17
- “MCDC mode” on page 2-17
- “Warn when unsupported blocks exist in model” on page 2-18
- “Coverage filter filename” on page 2-18
- “Coverage metric settings” on page 2-19
- “Record coverage for this model” on page 2-20

- “Record coverage for referenced models” on page 2-21
- “Include top model” on page 2-21
- “Coverage report options” on page 2-22
- “Additional data to include in coverage report” on page 2-23
- “Exclude inactive choices of variants” on page 2-24
- “Update coverage results on pause” on page 2-24
- “Save output data” on page 2-24
- “Enable cumulative data collection” on page 2-25
- “Include cumulative data in coverage report” on page 2-25
- “Save cumulative coverage results in workspace variable” on page 2-26
- “Cumulative coverage variable name” on page 2-27
- “Enable limited coverage analysis of accelerated models” on page 2-27

Restrict coverage recording interval

Record coverage only for a specified time interval.

For instance, you might want to restrict model coverage recording if your model has transient effects early in simulation, or if you need model coverage reported only for a particular model operation.

Settings

On

Coverage is recorded only for the time interval that you specify. To specify a time interval, use these parameters:

- “Coverage interval start time” on page 2-15
- “Coverage interval stop time” on page 2-16

Off (default)

Coverage is recorded for the entire duration of simulation.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovUseTimeInterval

Type: Character vector or string

Value: 'on' || 'off'

Default: 'off'

Coverage interval start time

Specify when coverage data collection must begin.

Settings

Enter a time value (in seconds).

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Restrict coverage recording interval” on page 2-15

Command-Line Information

Parameter: CovStartTime

Type: Floating-point number

Value: Time in seconds, for instance, 2

Default: 0

Coverage interval stop time

Specify when coverage data collection must end.

Settings

Enter a time value (in seconds).

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Restrict coverage recording interval” on page 2-15

Command-Line Information

Parameter: CovStopTime

Type: Floating-point number

Value: Time in seconds, for instance, 4

Default: 0

Force block reduction off

Report coverage for every block in the model that is supported for coverage.

Settings

On (default)

Coverage is recorded for every supported block in the model. The value of the configuration parameter **Block reduction** is ignored. See “Block reduction”.

Off

Coverage is not recorded for blocks that are effectively removed from the model because of block reduction. For instance, coverage is not recorded for a block that is reduced by dead code elimination.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information**Parameter:** CovForceBlockReductionOff**Type:** Character vector or string**Value:** 'on' | 'off'**Default:** 'on'**Treat Simulink logic blocks as short-circuited**

Specify that coverage must take into account the order of operands in blocks that perform a logical operation, for example, Logical Operator blocks.

For instance, if the order of the two inputs to a Logical AND block is taken into account, the second input is redundant when the first input is false. Therefore, for cases where the first input is false, the paths that lead to the second input are not considered for coverage.

Settings On

Coverage analysis does not consider the input to a logical operation that is rendered redundant by another input.

 Off (default)

Coverage analysis considers all inputs to a logical operation.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information**Parameter:** CovLogicBlockShortCircuit**Type:** Character vector or string**Value:** 'on' | 'off'**Default:** 'off'**MCDC mode**

Specify the definition of Modified Condition/Decision Coverage (MCDC) to use during coverage analysis. See “Modified Condition and Decision Coverage (MCDC) Definitions in Simulink Coverage”.

Settings**Masking**

Use masking MCDC analysis. To establish the independence of inputs, masking MCDC analysis does not require that all other inputs be strictly held constant while one input is varied. Therefore, masking MCDC analysis allows you to satisfy greater number of objectives in a given simulation.

Unique-Cause

Use unique-cause MCDC analysis.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- Specify Modified Condition/Decision Coverage (MCDC) for “Structural coverage level” on page 2-6.

Command-Line Information

Parameter: CovMcdcMode

Type: Character vector or string

Value: 'Masking'|'UniqueCause'

Default: 'Masking'

Warn when unsupported blocks exist in model

Warn when unsupported blocks exist in model.

Settings

On (default)

Provide a warning when blocks in the model are not supported for coverage analysis.

Off

Do not provide a warning for unsupported blocks.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovUnsupportedBlockWarning

Type: Character vector or string

Value: 'on'|'off'

Default: 'on'

Coverage filter filename

Specify a filter file to exclude certain model objects from coverage analysis before simulation, or to justify certain coverage outcomes.

You can use a command-line API to create filtering rules for blocks. Selection criteria for filtering includes filtering by individual block ID, filtering for all blocks of the same type, filtering certain decisions, conditions, and outcomes of a block, and more. You can also filter S-Function C++ code by code coverage outcome.

Note If you apply a model coverage filter that contains exclusion rules using the `CovFilter` parameter, collect coverage, and then remove the filter after simulation, you do not see coverage that the block would receive from that simulation without the filter applied. It is recommended to apply your coverage filter after simulation instead. This limitation does not apply to code coverage.

For an example of applying coverage filters after simulation, see:

- “Creating and Using Coverage Filters” for filtering in the Simulink UI.

- “Filter Coverage Results Using a Script” for filtering programmatically.

Settings

Enter full path to .cvf file with filter rules.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovFilter

Type: Character vector or string

Value: Full path to .cvf file

Default:

Coverage metric settings

Specify the type of coverage metric to be recorded. See also “Types of Model Coverage”.

Settings

Enter a sequence of letters that describe the coverage metric types. For example, enter 'dc' to collect decision and condition coverage.

To specify what coverage type(s) to collect, enter one or more of the letters in the following table as a single character array.

Note Using CovMetricSettings is not recommended. Use the alternatives in the table instead.

Letter	Effect on Coverage Analysis	Preferred Alternative
d	Collect decision coverage	Use the “Structural coverage level” on page 2-6 parameter
c	Collect condition coverage	Use the “Structural coverage level” on page 2-6 parameter
m	Collect MCDC coverage	Use the “Structural coverage level” on page 2-6 parameter
t	Collect lookup table coverage	Use the “Lookup table” on page 2-7 parameter
r	Collect signal range coverage	Use the “Signal range” on page 2-8 parameter
z	Collect signal size coverage	Use the “Signal size” on page 2-8 parameter
o	Collect coverage for Simulink Design Verifier blocks	Use the “Objectives and constraints” on page 2-9 parameter
i	Collect saturation on integer overflow coverage	Use the “Saturation on integer overflow” on page 2-9 parameter

Letter	Effect on Coverage Analysis	Preferred Alternative
b	Collect relational boundary coverage	Use the “Relational boundary” on page 2-10 parameter
s	Specify that coverage must take into account the order of operands in blocks that perform a logical operation	Use the “Treat Simulink logic blocks as short-circuited” on page 2-17 parameter.
w	Provide a warning when blocks in the model are not supported for coverage analysis	Use the “Warn when unsupported blocks exist in model” on page 2-18 parameter
e	Disables display coverage results using model coloring	Note CovHighlightResults has been removed. Include e in CovMetricSettings to avoid a warning message.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- One of these: “Record coverage for this model” on page 2-20, “Record coverage for referenced models” on page 2-21 (enter on) or “Record coverage for MATLAB files” on page 2-5

Command-Line Information

Parameter: CovMetricSettings

Value: Character vector or string where each character signifies a coverage metric. For instance, 'dc' specifies decision and condition coverage.

Default: 'dwe'

Record coverage for this model

Record model coverage data during simulation.

Note This parameter represents a deprecated workflow. Instead use these parameters:

- To enable coverage, use “Enable coverage analysis” on page 2-3.
 - To perform coverage analysis for the entire model, use “Scope of coverage analysis” on page 2-3.
-

Settings

On (default)

Simulink collects model coverage data during simulation.

Off

Model coverage data is not collected or reported.

Command-Line Information

Parameter: RecordCoverage

Type: Character vector or string

Value: 'on'|'off'

Default: 'on'

Record coverage for referenced models

Record coverage data for referenced models during simulation.

Note This parameter represents a deprecated workflow. Instead use these parameters:

- To enable coverage, use “Enable coverage analysis” on page 2-3.
 - To perform coverage analysis for referenced models, use “Scope of coverage analysis” on page 2-3.
 - To specify the referenced models, use “Select Models” on page 2-4.
-

Settings

Enter one of these:

- **on:** Coverage data is collected for all referenced models and Observer models.
- **off:** Coverage data is not collected for referenced models.
- **filtered:** Coverage data is collected for all referenced models and Observer models except those excluded using the parameter “Select Models” on page 2-4.

Command-Line Information

Parameter: CovModelRefEnable

Type: Character vector or string

Value: 'on'|'off'|'filtered'

Default: 'off'

Include top model

Record coverage for the top-level model in addition to referenced models.

Note This parameter represents a deprecated workflow. Instead use these parameters:

- To enable coverage, use “Enable coverage analysis” on page 2-3.
 - To perform coverage analysis for referenced models, use “Scope of coverage analysis” on page 2-3.
 - To include or exclude the top-level model, use “Select Models” on page 2-4.
-

Settings

On (default)

Coverage data is collected for the top-level model.

Off

Coverage data is not collected for the top-level model.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- Specify referenced model for “Scope of coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovIncludeTopModel

Type: Character vector or string

Value: 'on' || 'off'

Default: 'on'

Coverage report options


Specify the formatting of certain aspects of the coverage report (HTML).

Note For an easier way to specify report formatting, see Report from Results Explorer.

Settings

Enter a space-separated list of flags. The available flags are:

- '-sRT=0' — Do not show report
- '-sVT=1' — Open a web view of the report in a browser. See also “Export Model Coverage Web View”.
- '-aTS=1' — Show each test in the model summary.
- '-bRG=1' — Show bar graphs in the model summary.

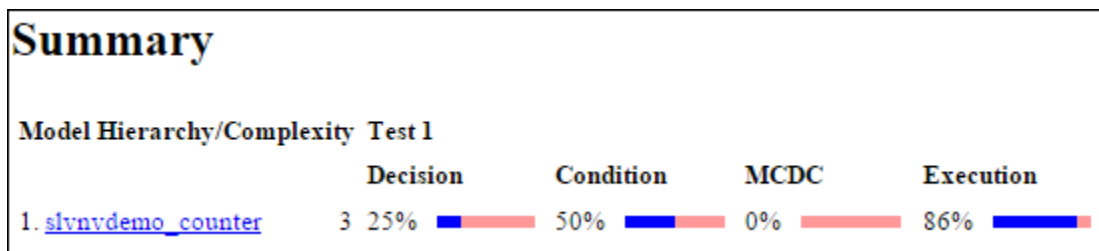

- '-bTC=1' — Use two color bar graphs (red, blue).
- '-hTR=1' — Display hit/count ratio in the model summary.

Summary

Model Hierarchy/Complexity	Test 1	Decision	Condition	MCDC	Execution
1. slvndemo_counter	3	25% (1/4)	50% (4/8)	0% (0/2)	86% (6/7)

- '-nFC=0' — Do not report fully covered model objects
- '-scm=1' — Include cyclomatic complexity numbers in summary. See also “Cyclomatic Complexity”.
- '-bcm=1' — Include cyclomatic complexity numbers in block details.
- '-xEv=0' — Filter Stateflow events from report.
- '-agT=1' — Show aggregated tests information in coverage report.
- '-req=1' — Include linked requirements in aggregated coverage report.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3

Command-Line Information

Parameter: CovHTMLOptions

Type: Character vector or string

Value:

Default:

Additional data to include in coverage report

Include additional model coverage data from cvdata objects in the model coverage report.

Settings

Enter the name of a cvdata object associated with a simulation.

You get a cvdata object when you record coverage and save coverage data in a workspace variable. See:

- “Last coverage run variable name” on page 2-12
- “Cumulative coverage variable name” on page 2-27

You also get a cvdata object if you run simulation using the cvsim function. See cvsim.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3

Command-Line Information

Parameter: CovCompData

Type: Character vector or string

Value: Name of cvdata object.

Default: No default

Exclude inactive choices of variants

Exclude inactive choices of Simulink variants with startup activation time and inactive variant configurations in Stateflow charts from coverage data results.

Settings

On

Exclude inactive choices of variants from the coverage report.

Off (default)

Include inactive choices of variants in the coverage report.

You can also change the variant reporting behavior after your simulation completes by changing the value of the “excludeInactiveVariants” on page 3-0 property in the cvdata object before generating the coverage report.

Command-Line Information

Parameter: CovExcludeInactiveVariants

Type: Character vector or string

Value: 'on'|'off'

Default: 'off'

Update coverage results on pause

Update coverage report when you pause during simulation. The report is updated with coverage results up to the current pause or stop time.

Settings

On (default)

Coverage report is updated when you pause simulation.

Off

Coverage report is not updated when you pause simulation.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovReportOnPause

Type: Character vector or string

Value: 'on'|'off'

Default: 'on'

Save output data

Save coverage data results to a file.

Settings On (default)

Coverage data results are saved to a file. Specify the file name using the parameter “Autosave data file name” on page 2-13.

 Off

Coverage data results are not saved to a file.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovSaveOutputData

Type: Character vector or string

Value: 'on'|'off'

Default: 'on'

Enable cumulative data collection

Collect model coverage results from successive simulations. See also “Cumulative Coverage Data”.

Note For an easier way to accumulate coverage data from multiple simulations, see “Accumulating Coverage Data from the Results Explorer”.

Settings On (default)

Model coverage data from successive simulations are collected together.

To show the cumulative data in one report, use the parameter “Include cumulative data in coverage report” on page 2-25. To save the data in one workspace variable, use the parameters “Save cumulative coverage results in workspace variable” on page 2-26 and “Cumulative coverage variable name” on page 2-27.

 Off

Model coverage data is retained for the most recent simulation only.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovEnableCumulative

Type: Character vector or string

Value: 'on'|'off'

Default: 'on'

Include cumulative data in coverage report

Show model coverage results from successive simulations in a single HTML report.

Note For an easier way to accumulate coverage data from multiple simulations, see “Accumulating Coverage Data from the Results Explorer”.

Settings

On

The HTML report shows model coverage data from successive simulations.

Off (default)

The HTML report shows model coverage data from the most recent simulation.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Enable cumulative data collection” on page 2-25

Command-Line Information

Parameter: CovCumulativeReport

Type: Character vector or string

Value: 'on'|'off'

Default: 'off'

Save cumulative coverage results in workspace variable

Save model coverage data from successive simulations in a single `cvdata` object in the MATLAB workspace.

You can retrieve coverage information from this variable later. For instance, to retrieve decision coverage information, use the `decisioninfo` function. For the full list of functions, see “Manage Coverage Data”.

Note For an easier way to accumulate coverage data from multiple simulations, see “Accumulating Coverage Data from the Results Explorer”.

Settings

On

A single `cvdata` object stores model coverage data from successive simulations. See “Cumulative Coverage Data”.

Specify the variable name using the parameter “Cumulative coverage variable name” on page 2-27.

Off (default)

The `cvdata` object stores model coverage data from the most recent simulation.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Enable cumulative data collection” on page 2-25

Command-Line Information

Parameter: CovSaveCumulativeToWorkspaceVar

Type: Character vector or string

Value: 'on' | 'off'

Default: 'off'

Cumulative coverage variable name

Specify the name of the cvdata object that saves coverage data from successive simulations.

Note For an easier way to accumulate coverage data from multiple simulations, see “Accumulating Coverage Data from the Results Explorer”.

Settings

Enter variable name, for instance, cumulativeCoverageData.

Dependency

To enable this parameter, select:

- “Enable coverage analysis” on page 2-3
- “Save cumulative coverage results in workspace variable” on page 2-26
- “Enable cumulative data collection” on page 2-25

Command-Line Information

Parameter: CovCumulativeVarName

Type: Character vector or string

Value: Name to be given to cvdata object

Default: 'covCumulativeData'

Enable limited coverage analysis of accelerated models

Collect limited coverage for accelerated models. You can collect the following coverage metrics in accelerator mode:

- Stateflow elements — all coverage metrics that are supported for normal mode
- MATLAB function blocks — all coverage metrics that are supported for normal mode
- Other Simulink blocks — only execution coverage

Settings

On (default)

Model coverage will be collected for models in accelerator mode.

Note Only execution coverage can be collected on Simulink blocks when the model simulation mode is set to accelerator.

Off

Model coverage will not be collected for models in accelerator mode.

Dependency

To enable this parameter, select “Enable coverage analysis” on page 2-3.

Command-Line Information

Parameter: CovAccelSimSupport

Type: Character vector or string

Value: 'on'|'off'

Default: 'on'

Classes

slcoverage.BlockSelector class

Package: slcoverage

Select blocks for coverage filter

Description

Specify block selection criteria for a filter rule.

The `slcoverage.BlockSelector` class is a `handle` class.

Creation

Description

`sel = slcoverage.BlockSelector(type,element)` specifies the type of model elements to create the filter rule for and returns an `slcoverage.BlockSelector` object.

Input Arguments

type — Block selector type

`slcoverage.BlockSelectorType` value

Type of model element to select, specified as one of these values:

- `slcoverage.BlockSelectorType.BlockInstance` — An instance of a block or an external MATLAB function called by a MATLAB function block.
- `slcoverage.BlockSelectorType.BlockType` — All blocks of the specified block type.
- `slcoverage.BlockSelectorType.Chart` — A Stateflow chart.
- `slcoverage.BlockSelectorType.MaskType` — Blocks that use the specified mask type.
- `slcoverage.BlockSelectorType.State` — A Stateflow state.
- `slcoverage.BlockSelectorType.StateAllContent` — Stateflow state and its contents.
- `slcoverage.BlockSelectorType.StateflowFunction` — A Stateflow function.
- `slcoverage.BlockSelectorType.Subsystem` — A subsystem block.
- `slcoverage.BlockSelectorType.SubsystemAllContent` — A subsystem and its contents.
- `slcoverage.BlockSelectorType.TemporalEvent` — A Stateflow temporal event.
- `slcoverage.BlockSelectorType.Transition` — A Stateflow transition.

Example: `slcoverage.BlockSelectorType.Transition`

element — Model element to select

property name | handle | Simulink ID

Model element to select, specified as a property name of the element, its handle, or its Simulink identifier. Use a handle or ID for selector types that select an instance. Use a property name, such as the value of a block's 'BlockType' property, to select multiple model elements.

Example: 'slcoverage_lct_bus:18', 'RelationalOperator'

Attributes:

SetAccess

protected

Data Types: char | string | handle | integer

Properties

ConstructorCode — Code used to create this selector object

character array

Code used to create this selector object, returned as a character vector.

Attributes:

GetAccess

public

SetAccess

protected

Description — Description of the selector

character vector

Description of the selector, returned as a character vector. Simulink Coverage creates the description based on the selector.

Attributes:

GetAccess

public

SetAccess

protected

Id — Model element identifier

Simulink ID (default) | property | handle

Model element identifier, specified as the property name of the element, the handle to an element, or the Simulink identifier of the element. Use a handle or ID for selector types that select an instance. Use a property name, such as the value of the 'BlockType' property of a block, to select multiple model elements.

Attributes

SetAccess

protected

Data Types: char | string | handle | integer

Type — Block selector type

slcoverage.BlockSelectorType value

Selector type, returned as one of these slcoverage.BlockSelectorType values:

- slcoverage.BlockSelectorType.BlockInstance — An instance of a block or an external MATLAB function called by a MATLAB function block.
- slcoverage.BlockSelectorType.BlockType — All blocks of the specified block type.
- slcoverage.BlockSelectorType.Chart — A Stateflow chart.

- `slcoverage.BlockSelectorType.MaskType` — Blocks that use the specified mask type.
- `slcoverage.BlockSelectorType.State` — A Stateflow state.
- `slcoverage.BlockSelectorType.StateAllContent` — Stateflow state and its contents.
- `slcoverage.BlockSelectorType.StateflowFunction` — A Stateflow function.
- `slcoverage.BlockSelectorType.Subsystem` — A subsystem block.
- `slcoverage.BlockSelectorType.SubsystemAllContent` — A subsystem and its contents.
- `slcoverage.BlockSelectorType.TemporalEvent` — A Stateflow temporal event.
- `slcoverage.BlockSelectorType.Transition` — A Stateflow transition.

Attributes:

<code>GetAccess</code>	<code>public</code>
<code>SetAccess</code>	<code>protected</code>

Methods**Public Methods**

`allSelectors` Selectors for model or code element

Examples**Add Block Selector Rules to a Filter**

Select multiple blocks to add a rule for and an instance of a block to add a rule for. The resulting filter has two rules. You can simulate your model for code coverage using the filter to see the effect.

Open the model. Specify coverage settings and turn on coverage recording.

```
modelName = 'slcoverage_lct_bus';
open_system(modelName);
set_param(modelName, 'CovMetricStructuralLevel', 'MDC', 'RecordCoverage', 'on');
```

Select blocks that have the same block type as the upper GE input block to add a filter rule for.

```
type = get_param('slcoverage_lct_bus/slCounter/upper GE input', 'BlockType');
bl = slcoverage.BlockSelector(slcoverage.BlockSelectorType.BlockType, type);
```

Create a filter object, create a rule based on the selector, and add the rule to the filter.

```
filt = slcoverage.Filter;
rule = slcoverage.FilterRule(bl, 'Tested elsewhere', slcoverage.FilterMode.Exclude);
filt.addRule(rule);
```

Select a block instance and add a rule for the block instance to the filter. This rule uses the default filter mode of Justify.

```
id = Simulink.ID.getSID('slcoverage_lct_bus/slCounter/And');
bl = slcoverage.BlockSelector(slcoverage.BlockSelectorType.BlockInstance, id);
rule = slcoverage.FilterRule(bl, 'Edge case');
filt.addRule(rule);
```

Save the filter as `blfilter`. Simulate the model for code coverage. Add the filter file as the value to the `filter` property of the resulting `cvdata` object. Then generate the coverage report.

```
filt.save('blfilter');
csim = cvsim(modelName);
```

```
csim.filter = 'blfilter';
cvhtml('cov',csim);
```

Examine the HTML report to see information about the blocks that you added rules for.

Get a Selector for a MATLAB Function

This example shows how to get a selector for a MATLAB® function using the `slcoverage.BlockSelector` class.

The example model `slvndemo_eml_model_coverage_demo` contains a series of MATLAB function blocks. One of the MATLAB function blocks calls an external function called `slcoverageExternalFile.m`.

Start by loading the model and generating coverage results.

```
modelName = 'slvndemo_eml_model_coverage_demo';
load_system(modelName)
covData = cvsim(modelName);
```

Since the model uses an external function, the coverage results are returned in a `cv.cvdatagroup` object. Use the `cv.cvdatagroup.get` class method to extract the `cvdata` object that contains the results for the `slcoverageExternalFile` function.

```
functionCov = get(covData, 'slcoverageExternalFile');
```

To exclude the entire function from the coverage report, use an exclusion filter. First, use the `slcoverage.BlockSelector` class to create a selector for the external MATLAB function `slcoverageExternalFile.m`. The correct `BlockSelectorType` enumeration to use for this is `BlockInstance`.

```
sel = slcoverage.BlockSelector(slcoverage.BlockSelectorType.BlockInstance, 'slcoverageExternalFile');
```

Create an empty `slcoverage.Filter` object.

```
filt = slcoverage.Filter;
```

Create the exclusion filter rule using the `slcoverage.FilterRule` class. Use the selector you created, the rationale for filtering the function, and the filter type of `slcoverage.FilterMode.Exclude`.

```
rule = slcoverage.FilterRule(sel, 'Exclude function demo', slcoverage.FilterMode.Exclude);
```

Add the filter rule to the filter object, name the filter, and save it to a file.

```
addRule(filt, rule);
setFilterName(filt, 'mfileFilter');
setFilterDescription(filt, 'Demo exclusion filter for external m-file');
save(filt, 'externalFileFilter')
```

Apply the filter file to the `cvdata` object which contains coverage results for the function `slcoverageExternalFile.m`.

```
functionCov.filter = 'externalFileFilter';
```

Create the coverage report and observe that the function `slcoverageExternalFile` now has no coverage data reported in the summary, and if you click on the function name to open the function

report, you see `slcoverageExternalFile` listed under **Objects Filtered from Coverage Analysis**.

```
cvhtml('covReport', covData)
```

Version History

Introduced in R2017b

See Also

`getSimulinkBlockHandle` | `cv.cvdatabgroup` | `slcoverage.Filter` | `slcoverage.FilterRule` | `slcoverage.MetricSelector` | `slcoverage.SFcnSelector`

Topics

“Top-Level Model Coverage Report”

“Create, Edit, and View Coverage Filter Rules”

slcoverage.CodeSelector class

Package: slcoverage

Select custom C or C++ code for coverage filter

Description

Use objects of the `slcoverage.CodeSelector` class to specify custom C or C++ code selection criteria for a filter rule.

The `slcoverage.CodeSelector` class is a handle class.

Creation

`sel = slcoverage.CodeSelector(type, fileName)` creates `CodeSelector` object of the specified type based on the specified `fileName` and sets the `Type` and `FileName` properties.

`sel = slcoverage.CodeSelector(type, fileName, functionName)` creates a `CodeSelector` object based on the specified C or C++ `functionName` in the file and sets the `FunctionName` property.

`sel = slcoverage.CodeSelector(type, fileName, functionName, expr, exprIndex)` creates a `CodeSelector` object for the specified expression and expression index and sets the `Expr` and `ExprIndex` properties.

`sel = slcoverage.CodeSelector(type, fileName, functionName, expr, exprIndex, outcomeIndex)` creates a `CodeSelector` object based on the specified coverage outcome and sets the `OutcomeIndex` property.

`sel = slcoverage.CodeSelector(type, fileName, functionName, expr, exprIndex, outcomeIndex, parentExprIndex)` creates a `CodeSelector` object based on the specified coverage outcome that belongs to an expression owned by `parentExprIndex` and sets the `DecOrCondIndex` property to `parentExprIndex`.

Properties

Type — Type of custom C or C++ code to select

`slcoverage.CodeSelectorType` value

Type of custom C or C++ code to select, specified as an enumeration of the `slcoverage.CodeSelectorType` class:

- `slcoverage.CodeSelectorType.File` — A custom C or C++ code file name.
- `slcoverage.CodeSelectorType.Function` — A custom C or C++ code function name.
- `slcoverage.CodeSelectorType.Decision` — A custom C or C++ code decision.

- `slcoverage.CodeSelectorType.Condition` — A custom C or C++ code condition.
- `slcoverage.CodeSelectorType.DecisionOutcome` — A custom C or C++ code decision outcome.
- `slcoverage.CodeSelectorType.ConditionOutcome` — A custom C or C++ code condition outcome.
- `slcoverage.CodeSelectorType.MCDCOutcome` — A custom C or C++ code MCDC outcome.
- `slcoverage.CodeSelectorType.RelationalBoundaryOutcome` — A custom C or C++ code relational boundary outcome.

Example: `slcoverage.CodeSelectorType.Function`

Attributes

SetAccess protected

Data Types: `slcoverage.CodeSelectorType`

FileName — C or C++ file to select

character array | string array

C or C++ file to select, specified as a character array or string array.

Example: `'myfile.c'`

Attributes

SetAccess protected

Data Types: `char` | `string`

FunctionName — C or C++ function to select

character array | string array

C or C++ function to select, specified as a character array or string array.

Example: `'counterbusFcn'`

Attributes

SetAccess protected

Data Types: `char` | `string`

Expr — Decision or condition expression to select

character array | string array

Decision or condition expression to select, specified as a character array or string array.

Example: `'x | y'`

Attributes

SetAccess protected

Data Types: `char` | `string`

ExprIndex — Expression index

integer

Expression index, specified as an integer. If you are filtering an outcome, this property is the index of the expression that owns that outcome. If you are filtering an expression, this property is the index of that expression inside the body of the function.

Example: 2

Attributes

SetAccess protected

Data Types: `single` | `double` | `int`

OutcomeIndex — Index of outcome to select

integer

Index of outcome to select, specified as an integer:

- For a Boolean expression, enter 1 for the F outcome or 2 for the T outcome.
- For a switch/case statement, enter 1 for the first case, 2 for the second case, and so on.
- For relational boundary
 - Integer type:
 - enter 1 for type -1.
 - enter 2 for type +1.
 - enter 3 for type 0.
 - Float type:
 - enter 1 for [-tol 0] or [-tol 0).
 - enter 2 for (0 tol] or [0 tol] is outcome 2

For more information about relational boundary coverage, see “Relational Boundary Coverage”.

Example: 2

Attributes

SetAccess protected

Data Types: `single` | `double` | `int`

DecOrCondIndex — Parent expression index

integer

Parent expression index, specified as an integer. Use this input when you are filtering an expression owned by a parent decision or condition. This property is the index of the parent decision or condition relative to the function.

Example: 2

Attributes

SetAccess protected

Data Types: `single` | `double` | `int`

ConstructorCode — Code used to create this selector object

character array

Code used to create this selector object, returned as a character vector.

Attributes:

GetAccess	public
SetAccess	protected

Description — Description of the selector

character vector

Description of the selector, returned as a character vector. Simulink Coverage creates the description based on the selector.

Attributes:

GetAccess	public
SetAccess	protected

Id — Model element identifier

Simulink ID (default) | property | handle

This property is empty for the `slcoverage.CodeSelector` class.**Attributes**

SetAccess	protected
-----------	-----------

Data Types: char | string | handle | integer

Methods**Public Methods**

allSelectors Selectors for model or code element

Examples**Add Code Selector Rules to a Filter**

This example shows how to select custom C or C++ code for which you want to add a filter rule.

Load the model.

```
modelName = 'slcovCCallerExample';
Simulink.importExternalCTypes('my_func.h','EnumClass','dynamic');
load_system(modelName)
```

Configure coverage settings using a `Simulink.SimulationInput` object.

```
covSet = Simulink.SimulationInput(modelName);
covSet = covSet.setModelParameter('CovEnable','on');
covSet = covSet.setModelParameter('CovMetricStructuralLevel','MCDC');
covSet = covSet.setModelParameter('CovSFcnEnable','on');
```



```
covSet = covSet.setModelParameter('CovSaveSingleToWorkspaceVar', 'on');
covSet = covSet.setModelParameter('CovSaveName', 'covData');
covSet = covSet.setModelParameter('SimAnalyzeCustomCode', 'on');
```

Simulate the model using covSet object as the input.

```
simOut = sim(covSet);
covData = simOut.covData;
```

Create a selector object to filter the custom C function timesK.

```
sel = slcoverage.CodeSelector(slcoverage.CodeSelectorType.Function, 'my_func.c', 'timesK');
```

Create a filter object and create a rule based on the selector, then add the rule to the filter.

```
filt = slcoverage.Filter;
rule = slcoverage.FilterRule(sel, 'Tested elsewhere', ...
    slcoverage.FilterMode.Exclude);
addRule(filt, rule);
setFilterName(filt, 'Code Filter')
```

Save the filter as codefilter and add it to the cvdata object for my_func.c. Because the coverage data is stored in a cv.cvdatagroup object, use the get method to set the property.

```
save(filt, 'codefilter');
covData.get('my_func.c').filter = 'codefilter';
```

Generate a coverage report.

```
cvhtml('codeCovReport', covData)
```

Review the report. Under **Custom Code File(s)**, click my_func.c and find the filter rule that you added under Objects Filtered from Coverage Analysis.

Objects Filtered from Coverage Analysis

Filter [Code Filter](#)

File codefilter.cvf

Description N/A

Code	Rationale
Function timesK (line 10)	Tested elsewhere

Create a C Code Outcome Selector

This example shows how to use an slcoverage.CodeSelector object to filter a code outcome in a custom C or C++ program called by a C Caller block.

Open the Model and Enable Coverage Analysis

Open the model.

```
modelName = 'slcovCCallerExample';
Simulink.importExternalCTypes('my_func.h', 'EnumClass', 'dynamic');
load_system(modelName)
```

Configure coverage settings using a Simulink.SimulationInput object.

```
covSet = Simulink.SimulationInput(modelName);
covSet = covSet.setModelParameter('CovEnable', 'on');
covSet = covSet.setModelParameter('CovMetricStructuralLevel', 'ConditionDecision');
covSet = covSet.setModelParameter('CovSFcnEnable', 'on');
covSet = covSet.setModelParameter('CovSaveSingleToWorkspaceVar', 'on');
covSet = covSet.setModelParameter('CovSaveName', 'covData');
```

Simulate the model using covSet as the input.

```
simOut = sim(covSet);
covData = simOut.covData;
```

The simulation returns the coverage data as a `cv.cvdatagroup` object when both the model and custom code are analyzed for coverage. To extract the code coverage data, use the `get` method of the `cvdatagroup` class.

```
codeCovData = get(covData, 'my_func.c');
```

Justify the Missing Outcome

In this example, you justify the F outcome of the `inputGELower` condition in the `(u1->limits.upper_saturation_limit >= limit) && inputGELower` decision, which is located inside the `counterbusFcn` function in the `my_func.c` source file.

```
35
36 void counterbusFcn(const COUNTERBUS *u1, int32_T u2, COUNTERBUS *y1, int32_T *y2)
37 {
38     int32_T limit;
39     boolean_T inputGELower;
40     limit = u1->inputsignal.input + u2;
41     inputGELower = (limit >= u1->limits.lower_saturation_limit);
42     if((u1->limits.upper_saturation_limit >= limit) && inputGELower) {
43         *y2 = limit;
44     } else {
45         if(inputGELower) {
46             limit = u1->limits.upper_saturation_limit;
47         } else {
48             limit = u1->limits.lower_saturation_limit;
49         }
50         *y2 = limit;
51     }
52     y1->inputsignal.input = *y2;
53     y1->limits = u1->limits;
54 }
```

Create a selector object using `slcoverage.CodeSelector`. The first input is a `CodeSelectorType` enumeration. To justify a condition outcome, use a `ConditionOutcome` enumeration. The second input is the code source file, `my_func.c`. The third input is the name of the function that contains the outcome, `counterbusFcn`. The fourth input is the expression which contains the outcome, `(u1-`

>limits.upper_saturation_limit >= limit) && inputGELower. The fifth input is the index of the expression that owns the outcome. In this case, inputGELower is the second condition within its parent condition, so this input is 2. The sixth input is the condition outcome index, which is 1 for the F outcome of a Boolean expression. The seventh input is the index of the parent decision or condition, which is 1 for (u1->limits.upper_saturation_limit >= limit) && inputGELower because it is the first decision in the function.

```
enum = slcoverage.CodeSelectorType.ConditionOutcome;
sel = slcoverage.CodeSelector(enum, 'my_func.c', 'counterbusFcn', '(u1->limits.upper_saturation_lim
```

Create a Filter object and a FilterRule object and apply the rule to the filter.

```
filt = slcoverage.Filter;
rule = slcoverage.FilterRule(sel, 'condition does not apply');
addRule(filt, rule);
```

Save the filter to a filter file and then apply the filter to the cvdata object.

```
save(filt, 'codeOutcomeFilter');
codeCovData.filter = 'codeOutcomeFilter';
```

Review the Coverage Report


Verify the outcome is filtered by generating a coverage report using cvhtml.

```
cvhtml('filteredCodeCovReport', codeCovData)
```

6. Function `counterbusFcn` (line 36)

[Justify or Exclude](#)

File: [my_func.c](#) (code)

Uncovered Links: 


Covered expressions: [\(u1->limits.upper_saturation_limit >= limit\) && inputGELower](#) (line 42)
[inputGELower](#) (line 45)
[limit >= u1->limits.lower_saturation_limit](#) (line 41)

Metric	Coverage
Cyclomatic Complexity	3
Decision	75% (3/4) decision outcomes
Condition	83% ((4+1)/6) condition outcomes
Statement	92% (12/13) covered statements (1 Function entry + 12 executable statements)

6.1. Decision/Condition [\(u1->limits.upper_saturation_limit >= limit\) && inputGELower](#) (line 42)

[Justify or Exclude](#)

Function: [counterbusFcn](#)

Uncovered Links: 

Metric	Coverage
Decision	100% (2/2) decision outcomes
Condition	100% ((3+1)/4) condition outcomes

Conditions analyzed

Description	True	False
u1->limits.upper_saturation_limit >= limit	90	11
inputGELower	90	J1

Version History

Introduced in R2018b

Justify unsatisfied code coverage outcomes

You can use the new `slcoverage.CodeSelectorType` enumerations to justify code coverage outcomes without excluding the entire expression:

- `slcoverage.CodeSelectorType.DecisionOutcome`
- `slcoverage.CodeSelectorType.ConditionOutcome`

- `slcoverage.CodeSelectorType.MCDCOutcome`
- `slcoverage.CodeSelectorType.RelationalBoundaryOutcome`

When using the new `slcoverage.CodeSelectorType` enumerations, use these new properties as optional input arguments:

- `outcomeIndex`
- `DecOrCondIndex`

See Also

`cv.cvdatabroup` | `slcoverage.Filter` | `slcoverage.FilterRule` | `slcoverage.MetricSelector` | `slcoverage.SFcnSelector` | `cvdata`

Topics

“Top-Level Model Coverage Report”

“Create, Edit, and View Coverage Filter Rules”

slcoverage.Filter class

Package: slcoverage

Coverage filter set

Description

Use an object of the `slcoverage.Filter` class to filter out unsatisfied coverage objectives by creating rules using the `slcoverage.FilterRule` class.

The `slcoverage.Filter` class is a handle class.

Creation

Description

`filt = slcoverage.Filter()` creates an `slcoverage.Filter` object.

`filt = slcoverage.Filter(filterFile)` creates an `slcoverage.Filter` object that contains the filter rules saved in `filterFile`.

Input Arguments

filterFile — Filter file

path name

Filter file in CVF format, specified as a character array of the path name to the file, or a cell array of character arrays. You do not need to include the file extension.

Example: `'myfilt', 'filters\myfilt', {'myfilt1', 'myfilt2'}`

Methods

Public Methods

<code>addRule</code>	Add coverage filtering rule to filter
<code>removeRule</code>	Remove rule from filter rule set
<code>rules</code>	Rules for filter
<code>setFilterName</code>	Set name of coverage filter object
<code>filterName</code>	Get name of coverage filter object
<code>setFilterDescription</code>	Set description of coverage filter object
<code>filterDescription</code>	Get description of coverage filter object
<code>save</code>	Save coverage filter object to coverage filter file

Examples

Add Rule to a Filter File

This example shows how to add a rule to a coverage filter file.

Create a filter object and use the `BlockSelector` class to create a `BlockSelector` object for the Saturation block in the `slvndemo_covfilt` model.

```
filt = slcoverage.Filter;
blockSel = slcoverage.BlockSelector(slcoverage.BlockSelectorType.BlockInstance, ...
    'slvndemo_covfilt/Saturation');
```

Create a rule to filter the Saturation block using `slcoverage.FilterRule` with the selector as the first input and the rationale as the second input.

```
rule = slcoverage.FilterRule(blockSel, 'Edge case');
```

Use the `addRule` method of the `slcoverage.Filter` class to add the rule to the filter object.

```
addRule(filt, rule);
```

Save the filter with the new rule to a filter file using the `save` method of the `slcoverage.Filter` class.

```
save(filt, 'myFilterFile')
```

Create and Use a Coverage Filter Object

This example shows how to create a filter object and add a rule to exclude a subsystem from coverage analysis.

Open the `slvndemo_covfilt` model. Use a `SimulationInput` object to enable coverage recording and specify coverage settings.

```
modelName = 'slvndemo_covfilt';
load_system(modelName)
simIn = Simulink.SimulationInput(modelName);
simIn = setModelParameter(simIn, 'CovEnable', 'on');
simIn = setModelParameter(simIn, 'CovMetricStructuralLevel', 'MCDC');
simIn = setModelParameter(simIn, 'CovSaveSingleToWorkspaceVar', 'on');
simIn = setModelParameter(simIn, 'CovSaveName', 'covData');
```

Simulate the model. The coverage data is stored in the value supplied for the `CovSaveName` property.

```
simOut = sim(simIn);
covData = simOut.covData;
```

You can filter a block by using the `slcoverage.BlockSelector` class. To exclude the Switchable config subsystem, use `slcoverage.BlockSelectorType.SubsystemAllContent` as the first input.

```
subsysSel = slcoverage.BlockSelector(...
    slcoverage.BlockSelectorType.SubsystemAllContent, ...
    'slvndemo_covfilt/Switchable config');
```

Create the filter rule by passing the selector, rationale, and the exclude filter mode as inputs.

```
rule = slcoverage.FilterRule(subsysSel, ...
    'Unused configuration', ...
    slcoverage.FilterMode.Exclude);
```

Create an `slcoverage.Filter` object and then add the rule to it.

```
filt = slcoverage.Filter;  
addRule(filt, rule);
```

Save the filter to a file called `blockFilter.cvf`. To create a report that uses this coverage filter, add the filter file as the value to the `filter` property of `covData`, and create a report called `coverageData.html` using `covData`.

```
save(filt, 'blockFilter')  
covData.filter = 'blockFilter';  
cvhtml('coverageData', covData)
```

Use Multiple Coverage Filter Files for a Simulation

If you have multiple filter files that each contain their own set of rules, you can apply them to a coverage result set by creating a cell array of the filter file names or path names. In this example, you apply two filter files to a single `cvdata` object and then view the report to see that the filters are applied.

Load the `slvnvdemo_covfilt` model into memory.

```
modelName = 'slvnvdemo_covfilt';  
load_system(modelName)
```

Set the coverage settings by using a `Simulink.SimulationInput` object and simulate the model using `sim`.

```
simIn = Simulink.SimulationInput(modelName);  
simIn = setModelParameter(simIn, 'CovEnable', 'on');  
simIn = setModelParameter(simIn, 'CovMetricStructuralLevel', 'MCDC');  
simIn = setModelParameter(simIn, 'CovSaveSingleToWorkspaceVar', 'on');  
simIn = setModelParameter(simIn, 'CovSaveName', 'covData');  
simOut = sim(simIn);
```

Apply the two filters to the `cvdata` object by assigning them to the `filter` property as a cell array.

```
covData.filter = {'filter_1', 'filter_2'};  
cvhtml('twoFiltersCovData', covData);
```

You can see the applied coverage filters in the **Objects Filtered from Coverage Analysis** section of the coverage report.

Version History

Introduced in R2017b

See Also

`slcoverage.MetricSelector` | `slcoverage.BlockSelector` | `slcoverage.SFcnSelector` | `slcoverage.FilterRule`

Topics

“Create, Edit, and View Coverage Filter Rules”

slcoverage.FilterRule class

Package: slcoverage

Create coverage filter rule

Description

Use an object of the `slcoverage.FilterRule` class to specify a coverage filtering rule that includes the selector and the rationale for filtering.

The `slcoverage.FilterRule` class is a `handle` class.

Creation

`rule = slcoverage.FilterRule(selector, rationale)` creates the filter rule object `rule` using the specified `selector` and `rationale` and sets the `selector` and `rationale` properties.

`rule = slcoverage.FilterRule(selector, rationale, mode)` creates a `FilterRule` object with the specified filter mode and sets the `mode` property. You can use only `justify` with metric selectors.

Properties

selector — Selector for the rule

`slcoverage.BlockSelector` object | `slcoverage.MetricSelector` object | `slcoverage.SFcnSelector` object | `slcoverage.CodeSelector` object

Selector for the rule, specified as an `slcoverage.BlockSelector` object, `slcoverage.MetricSelector` object, `slcoverage.SFcnSelector` object, or `slcoverage.CodeSelector` object. The selector specifies the model object or coverage outcome to which the rule applies.

Attributes:

<code>GetAccess</code>	<code>public</code>
<code>SetAccess</code>	<code>public</code>

Data Types: `slcoverage.BlockSelector` | `slcoverage.MetricSelector` | `slcoverage.SFcnSelector` | `slcoverage.CodeSelector`

rationale — Rationale for filter rule

character array | string array

Rationale for filter rule, specified as a character array or string array.

Attributes:

<code>GetAccess</code>	<code>public</code>
<code>SetAccess</code>	<code>public</code>

Data Types: char | string

mode — Filter mode

slcoverage.FilterMode.Justify (default) | slcoverage.FilterMode.Exclude

Filter mode, specified as slcoverage.FilterMode.Justify or slcoverage.FilterMode.Exclude.

Attributes:

GetAccess	public
SetAccess	public

Data Types: slcoverage.FilterMode

Examples

Create Rule That Uses a Block Selector

Create a block selector object and a rule for it. Then add the rule to a filter.

Open the model. Specify coverage settings and turn on coverage recording.

```
modelName = 'slcoverage_lct_bus';
open_system(modelName);
set_param(modelName, 'CovMetricStructuralLevel', 'MDC', 'RecordCoverage', 'on');
```

Select blocks with block type 'RelationalOperator' to add a filter rule for.

```
bl = slcoverage.BlockSelector(slcoverage.BlockSelectorType.BlockType, 'RelationalOperator');
```

Create a filter object, create a rule, and add the rule to the filter. This rule excludes the selection from coverage analysis.

```
filt = slcoverage.Filter;
rule = slcoverage.FilterRule(bl, 'Tested elsewhere', slcoverage.FilterMode.Exclude);
filt.addRule(rule);
```

Version History

Introduced in R2017b

See Also

slcoverage.Filter | slcoverage.MetricSelector | slcoverage.BlockSelector | slcoverage.SFcnSelector

Topics

“Coverage Filter Rules and Files”

“Create, Edit, and View Coverage Filter Rules”

slcoverage.MetricSelector class

Package: slcoverage

Select metric criterion for coverage filter

Description

Use an object of the `slcoverage.MetricSelector` class to specify metric selection criteria for a coverage filter rule.

The `slcoverage.MetricSelector` class is a `handle` class.

Creation

Description

`sel = slcoverage.MetricSelector(type,element,objIndex,outIndex)` creates a metric selector object of type `type` for the specified model element `element` at the objective index `objIndex` and outcome index `outIndex`.

You can only create a justify rule for a metric selector. For more information about the difference between justification and exclusion, see “Coverage Filtering”.

For more information on the condition and decision coverage tables produced in the report, see “Top-Level Model Coverage Report”.

Input Arguments

type — Metric selector type

`slcoverage.MetricSelectorType.ConditionOutcome` |
`slcoverage.MetricSelectorType.DecisionOutcome` |
`slcoverage.MetricSelectorType.MCDCOutcome` |
`slcoverage.MetricSelectorType.RelationalBoundaryOutcome` |
`slcoverage.MetricSelectorType.SaturationOverflowOutcome`

Metric selector type, specified as:

- `slcoverage.MetricSelectorType.ConditionOutcome` objects select condition metric objective outcomes.
- `slcoverage.MetricSelectorType.DecisionOutcome` objects select decision metric objective outcomes.
- `slcoverage.MetricSelectorType.MCDCOutcome` objects select MCDC metric objective outcomes.
- `slcoverage.MetricSelectorType.RelationalBoundaryOutcome` objects select outcome metrics related to relational boundary outcomes.
- `slcoverage.MetricSelectorType.SaturationOverflowOutcome` objects select outcome metrics related to saturation on integer overflow outcomes.

element — Model element to select

handle | Simulink ID

Model element to select, specified as a handle or the Simulink identifier of the model element.

Example: 'slcoverage_lct_bus:18'

objIndex — Index of objective

integer

Index of the objective that you want to filter, specified as an integer.

Example: 1

outIndex — Index of outcome

integer

Index of the outcome that you want to filter, specified as an integer.

Example: 2

Properties**ConstructorCode — Code used to create this selector object**

character array

Code used to create this selector object, returned as a character vector.

Attributes:

GetAccess	public
SetAccess	protected

Description — Description of the selector

character vector

Description of the selector, returned as a character vector. Simulink Coverage creates the description based on the selector.

Attributes:

GetAccess	public
SetAccess	protected

Id — Element identifier

Simulink ID (default) | handle

Identifier of the model element, returned as character vector of the Simulink ID or a handle.

Attributes:

GetAccess	public
SetAccess	protected

ObjectiveIndex — Index of objective

integer

Index of the objective for this selector, returned as an integer.

Attributes:

GetAccess	public
SetAccess	protected

OutcomeIndex — Index of outcome

integer

Index of the outcome for this selector, returned as an integer.

Attributes:

GetAccess	public
SetAccess	protected

Type — Metric selector type

ConditionOutcome | DecisionOutcome | MCDCOutcome | RelationalBoundaryOutcome | SaturationOverflowOutcome

Selector type, returned as ConditionOutcome, DecisionOutcome, MCDCOutcome, RelationalBoundaryOutcome, or SaturationOverflowOutcome.

Attributes:

GetAccess	public
SetAccess	protected

Methods**Public Methods**

allSelectors Selectors for model or code element

Examples**Add Metric Selector Rule to a Filter**

This example shows how to select a metric and add a rule that uses that metric. In this example, you create a rule to justify an unsatisfied decision for a Saturation block.

Open the Model and Enable Coverage Analysis

Load the model into memory.

```
modelName = 'slvndemo_covfilt';
load_system(modelName);
```

Use a Simulink.SimulationInput object to configure coverage for the model.

```
covSet = Simulink.SimulationInput(modelName);
covSet = covSet.setModelParameter('CovEnable', 'on');
covSet = covSet.setModelParameter('CovMetricStructuralLevel', 'MCDC');
covSet = covSet.setModelParameter('CovSFCnEnable', 'on');
covSet = covSet.setModelParameter('StopTime', '20');
covSet = covSet.setModelParameter('CovSaveSingleToWorkspaceVar', 'on');
covSet = covSet.setModelParameter('CovSaveName', 'covData');
```

Simulate the model using the SimulationInput object as the input.

```
simOut = sim(covSet);
```

View the coverage results before applying a filter. You can access the coverage using `decisioninfo`, or you can view the HTML report using `cvhtml`.

```
covInitial = decisioninfo(covData,[modelName, '/Saturation']);
percentInitial = 100 * covInitial(1)/covInitial(2)
```

```
percentInitial =
```


```
    50
```

```
cvhtml('covReportInitial',covData)
```

Saturate block "[Saturation](#)"



[Justify or Exclude](#)

Parent: [/slvndemo_covfilt](#)

Uncovered Links: 

Metric	Coverage
Cyclomatic Complexity	2
Decision	50% (2/4) decision outcomes
Execution	100% (1/1) objective outcomes

Decisions analyzed

input > lower limit	50%
false	0/201 
true	201/201
input >= upper limit	50%
false	201/201
true	0/201 

Both `decisioninfo` and `cvhtml` show the same result of 50% decision coverage. If you don't intend your current tests to exercise this outcome, you can justify the outcome so it is no longer reported as missing coverage.

In this example, we justify the `false` decision outcome of the `input > lower limit` decision objective in the Saturation block.

Justify the Missing Condition Objective

`MetricSelector` objects accept the block path or the block handle as the second input. Get the block handle of the Saturation block by using `getSimulinkBlockHandle`.

```
id = getSimulinkBlockHandle([modelName, '/Saturation']);
```

Because the objective being justified is a decision outcome, the first input to the metric selector constructor is `slcoverage.MetricSelectorType.DecisionOutcome`. The second input is the block handle. The last two are the index of the objective to justify and the index of the outcome of that objective, respectively.

Because the input `> lower limit` decision objective is the first objective for the Saturation block, its objective index is 1. Because the `false` outcome of this objective is the first outcome, its outcome index is also 1. Therefore, the last two inputs are 1, 1.

```
metr = slcoverage.MetricSelector(slcoverage.MetricSelectorType.DecisionOutcome, id, 1, 1);
```

Create a filter and rule. In this case, we use the default filter mode of justify. Then add the rule to the filter using the `addRule` method.

```
filt = slcoverage.Filter;
rule = slcoverage.FilterRule(metr, 'Expected result');
filt.addRule(rule);
```

Save the filter to a filter file using the `save` method. Then apply the filter file to the `cvdata` object by assigning the `filter` property to the new filter file.

```
filt.save('metrfilter');
covData.filter = 'metrfilter';
```

Re-generate the coverage results for the Saturation block using the new filtered `cvdata` object.

```
covFiltered = decisioninfo(covData, [modelName, '/Saturation']);
percentInitial = 100 * covFiltered(1)/covFiltered(2)
```

```
percentInitial =
```


```
    75
```

```
cvhtml('covReportFiltered', covData)
```

Saturate block "[Saturation](#)"


[Justify or Exclude](#)

Parent: [/slvndemo_covfilt](#)

Uncovered Links: 

Metric	Coverage
Cyclomatic Complexity	2
Decision	75% ((2+1)/4) decision outcomes
Execution	100% (1/1) objective outcomes

Decisions analyzed

input > lower limit	100%
false	J1
true	201/201
input >= upper limit	50%
false	201/201
true	0/201 

In the HTML report, the missing decision outcome is highlighted to indicate that it is justified. Decision coverage for the Saturation block is now 75%.

Version History

Introduced in R2017b

Justify missing coverage outcomes for individual MCDC objectives

You can use `slcoverage.MetricSelectorType.MCDCOutcome` to justify individual modified condition/decision coverage (MCDC) outcomes without excluding the entire expression.

See Also

`slcoverage.BlockSelector` | `getSimulinkBlockHandle` | `slcoverage.Filter` | `slcoverage.FilterRule` | `slcoverage.SFcnSelector`

Topics

“Coverage Filtering”

“Top-Level Model Coverage Report”

“Create, Edit, and View Coverage Filter Rules”

slcoverage.Selector class

Package: slcoverage

Get selectors of all types

Description

Use the `slcoverage.Selector` class with the `allSelectors` method to return all types of the selectors for a model object.

The `slcoverage.Selector` class is a `handle` class.

Properties

ConstructorCode — Code used to create this selector object

character array

Code used to create this selector object, returned as a character vector.

Attributes:

GetAccess	public
SetAccess	protected

Description — Description of the selector

character vector

Description of the selector, returned as a character vector. Simulink Coverage creates the description based on the selector.

Attributes:

GetAccess	public
SetAccess	protected

Id — Element identifier

Simulink ID (default) | handle

Identifier of the model element, returned as character vector of the Simulink ID or a handle.

Attributes:

GetAccess	public
SetAccess	protected

Type — Selector type

selector type value

Selector type, returned as a selector type of the corresponding selector.

Attributes:

GetAccess	public
SetAccess	protected

Methods**Public Methods**

allSelectors Selectors for model or code element

Examples**Get All Selectors**

This example shows how to get all the selectors for an And block and then add a rule to justify or exclude a selector. Metric selectors can only be justified.

Load the model and set coverage settings

```
modelName = 'slvndemo_covfilt';
load_system(modelName);
set_param(modelName, 'CovEnable', 'on', 'CovMetricStructuralLevel', 'MCDC');
```

First, get the block handle for the And block.

```
id = getSimulinkBlockHandle([modelName, '/Saturation']);
```

Get the selectors using the block handle.

```
sel = slcoverage.Selector.allSelectors(id)
```

```
sel =
```

```
1x10 heterogeneous Selector (BlockSelector, MetricSelector) array with properties:
```

```
Description
Type
Id
ConstructorCode
```

The block has ten selectors. You can index into each one to see their contents. In this example, you want to justify the sixth selector.

```
sel(6)
```

```
ans =
```

```
MetricSelector with properties:
```

```
ObjectiveIndex: 2
OutcomeIndex: 2
Description: 'T outcome of input > upper limit in Saturate block "Saturation"'
Type: DecisionOutcome
```

```
Id: 'slvndemo_covfilt:5'  
ConstructorCode: 'slcoverage.MetricSelector(slcoverage.MetricSelectorType.DecisionOutcome, 's
```

Create a justify rule, then create a filter object and add the rule to it.

```
rule = slcoverage.FilterRule(sel(6), 'Expected result');  
filt = slcoverage.Filter;  
filt.addRule(rule);
```

Save the filter and generate a coverage report.

```
filt.save('metrfilter');  
csim = cvsim(modelName);  
csim.filter = 'metrfilter';  
cvhtml('cov',csim,'-sRT=0');
```

Version History

Introduced in R2017b

See Also

[slcoverage.MetricSelector](#) | [slcoverage.BlockSelector](#) | [slcoverage.CodeSelector](#) | [slcoverage.SFcnSelector](#)

Topics

“Create, Edit, and View Coverage Filter Rules”

slcoverage.SFcnSelector class

Package: slcoverage

Select S-function criterion for filtering rule

Description

Use objects of the `slcoverage.SFcnSelector` class to specify the S-function selection criteria for a filter rule.

The `slcoverage.SFcnSelector` class is a `handle` class.

Creation

`sel = slcoverage.SFcnSelector(type,id)` creates an `SFcnSelector` object of the specified type based on S-Function block `id` and sets the `Type` and `Id` properties.

`sel = slcoverage.SFcnSelector(type,id,fileName)` creates an `SFcnSelector` object based on the specified C or C++ `fileName`, and sets the `FileName` property.

`sel = slcoverage.SFcnSelector(type,id,fileName,functionName)` creates an `SFcnSelector` object based on the specified C or C++ `functionName` in the specified file and sets the `FunctionName` property.

`sel = slcoverage.SFcnSelector(type,id,fileName,functionName,expr,exprIndex)` creates an `SFcnSelector` object based on the specified expression and `exprIndex` and sets the `Expr` and `ExprIndex` properties.

`sel = slcoverage.SFcnSelector(type,id,fileName,functionName,expr,exprIndex,outcomeIndex)` creates an `SFcnSelector` object based on the specified coverage outcome and sets the `OutcomeIndex` property.

`sel = slcoverage.SFcnSelector(type,id,fileName,functionName,expr,exprIndex,outcomeIndex,parentExprIndex)` creates an `SFcnSelector` object based on the specified coverage outcome whose parent is another expression specified by `parentExprIndex` and sets the `DecOrCondIndex` property.

Properties

Type — Type of S-function

`slcoverage.SFcnSelectorType` enumeration

Type of S-function to select, specified as an enumeration of the `slcoverage.SFcnSelectorType` class:

- `slcoverage.SFcnSelectorType.SFcnName` selects the specified S-function.

- `slcoverage.SFcnSelectorType.SFcnInstanceCppFileName` selects the generated code file for this block. Use this input argument with the `fileName` argument.
- `slcoverage.SFcnSelectorType.SFcnInstanceCppFunction` selects an instance of a C or C++ function. Use this input argument with the `fileName` and `functionName` arguments.
- `slcoverage.SFcnSelectorType.SFcnInstanceCppCondition` selects a condition in the specified code. Use this input argument with `fileName`, `functionName`, `expr`, and `exprIndex` arguments.
- `slcoverage.SFcnSelectorType.SFcnInstanceCppDecision` selects a decision in the specified code. Use this input argument with `fileName`, `functionName`, `expr`, and `exprIndex` arguments.
- `slcoverage.SFcnSelectorType.SFcnInstanceCppDecisionOutcome` selects a decision outcome in the specified code. Use this input argument with `fileName`, `functionName`, `expr`, `exprIndex`, and `outcomeIndex` arguments.
- `slcoverage.SFcnSelectorType.SFcnInstanceCppConditionOutcome` selects a condition outcome in the specified code. Use this input argument with `fileName`, `functionName`, `expr`, `exprIndex`, and `outcomeIndex` arguments. If the expression that owns the outcome is owned by a parent decision, also use the `parentExprIndex` argument.
- `slcoverage.SFcnSelectorType.SFcnInstanceCppMDCOutcome` selects an MDC outcome in the specified code. Use this input argument with `fileName`, `functionName`, `expr`, `exprIndex`, and `outcomeIndex` arguments.
- `slcoverage.SFcnSelectorType.SFcnInstanceCppRelationalBoundaryOutcome` selects a relational boundary outcome in the specified code. Use this input argument with the `fileName`, `functionName`, `expr`, `exprIndex`, and `outcomeIndex` arguments. If the relational operator outcome is owned by a condition that is inside a decision, also use the `parentExprIndex` argument.

Data Types: `slcoverage.SFcnSelectorType`

Id — Model element identifier

Simulink ID (default) | property | handle

Model element identifier, specified as the property name of the element, the handle to an element, or the Simulink identifier of the element. Use a handle or ID for selector types that select an instance. Use a property name, such as the value of the 'BlockType' property of a block, to select multiple model elements.

Attributes

SetAccess protected

Data Types: `char` | `string` | `handle` | `integer`

FileName — C or C++ file to select

character array | string array

C or C++ file to select, specified as a character array or string array.

Example: `'myfile.c'`

Attributes:

SetAccess protected

Data Types: char | string

FunctionName — C or C++ function to select

character array | string array

C or C++ function to select, specified as a character array or string array.

Example: 'counterbusFcn'

Attributes:

SetAccess protected

Data Types: char | string

Expr — Expression to select

character array | string array

Expression to select, specified as a character array or string array.

Example: 'inputGELower'

Attributes:

SetAccess protected

Data Types: char | string

ExprIndex — Expression index

scalar

Expression index, specified as an integer. If you are filtering an outcome, this property is the index of the expression that owns that outcome. If you are filtering an expression, this property is the index of that expression inside the body of the function.

Example: 2

Attributes:

SetAccess protected

Data Types: single | double | int

OutcomeIndex — Index of outcome to select

integer

Index of outcome to select, specified as an integer:

- For a Boolean expression, enter 1 for the F outcome or 2 for the T outcome.
- For a switch/case statement, enter 1 for the first case, 2 for the second case, and so on.
- For relational boundary
 - Integer type:
 - enter 1 for type -1.
 - enter 2 for type +1.

- enter 3 for type 0.
- Float type:
 - enter 1 for [-tol 0] or [-tol 0).
 - enter 2 for (0 tol] or [0 tol] is outcome 2

For more information about relational boundary coverage, see “Relational Boundary Coverage”.

Example: 2

Attributes

SetAccess protected

Data Types: single | double | int

DecOrCondIndex — Parent expression index

integer

Parent expression index, specified as an integer. Use this input to filter an expression that is owned by a parent decision or condition; this is the index of the parent decision or condition relative to the function.

Example: 2

Attributes

SetAccess protected

Data Types: single | double | int

Description — Description of the selector

character vector

Description of the selector, returned as a character vector. Simulink Coverage creates the description based on the selector.

Attributes:

GetAccess public
SetAccess protected

ConstructorCode — Code used to create this selector object

character array

Code used to create this selector object, returned as a character vector.

Attributes:

GetAccess public
SetAccess protected

Methods

Public Methods

allSelectors Selectors for model or code element

Examples

Create an S-Function Selector

This example shows how to create an S-Function selector.

Load the model by using `load_system`.

```
load_system('slvndemo_covfilt');
```

Create an S-Function selector by using `slcoverage.SFcnSelector`. To select the S-Function based on its name, enter `slcoverage.SFcnSelectorType.SFcnName` as the first input. The second input is the path to the S-Function.

```
sel = slcoverage.SFcnSelector(slcoverage.SFcnSelectorType.SFcnName,...
                             'slvndemo_covfilt/Mode Logic/ SFunction')
```

```
sel =
```

```
SFcnSelector with properties:
```

```
    FileName: ''
  FunctionName: ''
        Expr: ''
 OutcomeIndex: []
DecOrCondIndex: []
   Description: 'N/A'
         Type: SFcnName
           Id: 'slvndemo_covfilt/Mode Logic/ SFunction'
ConstructorCode: 'slcoverage.SFcnSelector(slcoverage.SFcnSelectorType.SFcnName, 'slvndemo_covfilt/Mode Logic/ SFunction')
```

Create an S-Function Outcome Selector

This example shows how to create a selector for an S-Function using the `slcoverage.SFcnSelector` class.

In this example, your model has an S-Function named `RejectDoublePress_sfun`. Inside the S-Function, suppose that the condition `rtb_AccelResSwOUT` is never false, and you want to justify this false outcome in the coverage report.


```

19 void RejectDoublePress_sfuns_wrapper(const boolean_T *CoastSetSwIn,
20                                     const boolean_T *AccelResSwIn,
21                                     boolean_T *CoastSetSwOut,
22                                     boolean_T *AccelResSwOut)
23 {
24     /* Output_BEGIN */
25     int rtb_AccelResSwOUT;
26
27     rtb_AccelResSwOUT = !(CoastSetSwIn[0] && AccelResSwIn[0]);
28
29     CoastSetSwOut[0] = (rtb_AccelResSwOUT && CoastSetSwIn[0]);
30
31     AccelResSwOut[0] = (rtb_AccelResSwOUT && AccelResSwIn[0]);
32     /* Output_END */
33 }
34

```

Load the model.

```

modelName = 'ex_cc_cruise_control_doublepress_sfuns';
load_system(modelName)

```

Configure coverage settings using a Simulink.SimulationInput object.

```

covSet = Simulink.SimulationInput(modelName);
covSet = covSet.setModelParameter('CovEnable', 'on');
covSet = covSet.setModelParameter('CovMetricStructuralLevel', 'ConditionDecision');
covSet = covSet.setModelParameter('CovSFcnEnable', 'on');
covSet = covSet.setModelParameter('CovSaveSingleToWorkspaceVar', 'on');
covSet = covSet.setModelParameter('CovSaveName', 'covData');
covSet = covSet.setModelParameter('SimAnalyzeCustomCode', 'on');

```

Simulate the model using covSet as the input.

```

simOut = sim(covSet);
covData = simOut.covData;

```

Generating 'RejectDoublePress_sfuns.c'Please wait

```

### Building S-function 'RejectDoublePress_sfuns.c' for ex_cc_cruise_control_doublepress_sfuns/Rej
mex -IC:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex97019589 -I\ -I\ -DUSE_PU
Building with 'Microsoft Visual C++ 2019 (C)'.
MEX completed successfully.
mex -IC:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex97019589 -I\ -I\ -DUSE_PU
Building with 'Microsoft Visual C++ 2019 (C)'.
MEX completed successfully.

```

Create a selector object for the outcome missing coverage by using the `slcoverage.SFcnSelector` class. To select a condition outcome inside an S-Function, use the `SFcnInstanceCppConditionOutcome` enumeration as the first input. The second input is the block ID or block path to the S-Function. The third input is the file name of the source file that contains the expression, `RejectDoublePress_sfuns_wrapper.c`. The fourth input is the name of the function that contains the condition, `RejectDoublePress_sfuns_Outputs_wrapper`. The fifth input is the

expression which owns the outcome, which is `rtb_AccelResSwOUT && CoastSetSwIn[0]`, because this parent decision owns the condition `rtb_AccelResSwOUT`.

The sixth input is the index of the expression that owns the outcome relative to its parent, and because `rtb_AccelResSwOUT` is the first condition in its parent decision, this input is 1. The seventh input is the outcome index, which is 1 because this is the F case of a Boolean expression. The final input is the index of the parent expression relative to the function, and because `rtb_AccelResSwOUT && CoastSetSwIn[0]` is the second decision in the function, this input is 2.

```
enum = slcoverage.SFcnSelectorType.SFcnInstanceCppConditionOutcome;
SFunID = Simulink.ID.getSID([modelName, '/RejectDoublePress']);
sel = slcoverage.SFcnSelector(enum, SFunID, 'RejectDoublePress_sfunk_wrapper.c', ...
    'RejectDoublePress_sfunk_outputs_wrapper', 'rtb_AccelResSwOUT && CoastSetSwIn[0]', 1, 1, 2);
```

Create a `Filter` object and a rule based on the selector, then add the rule to the filter.

```
filt = slcoverage.Filter;
rule = slcoverage.FilterRule(sel, 'Tested elsewhere', ...
    slcoverage.FilterMode.Justify);
addRule(filt, rule);
setFilterName(filt, 'S-Function Filter')
```

Save the filter as `sfunfilter` and add it to the `cvdata` object for `my_func.c` by setting the `filter` property to the filter file name.

```
save(filt, 'sfunfilter');
covData.filter = 'sfunfilter';
```

Generate a coverage report.

```
cvhtml('codeCovReport', covData)
```

Review the report. Click the `RejectDoublePress_sfunk` link under `S-Function Code Coverage Results` to see the filtered outcome under `Objects Filtered from Coverage Analysis`.

Version History

Introduced in R2017b

Justify unsatisfied code coverage outcomes

You can use the new `slcoverage.SFcnSelectorType` enumerations to justify code coverage outcomes without excluding the entire expression:

- `slcoverage.SFcnSelectorType.SFcnInstanceCppDecisionOutcome`
- `slcoverage.SFcnSelectorType.SFcnInstanceCppConditionOutcome`
- `slcoverage.SFcnSelectorType.SFcnInstanceCppMCDCOOutcome`
- `slcoverage.SFcnSelectorType.SFcnInstanceCppRelationalBoundaryOutcome`

When using the new `slcoverage.SFcnSelectorType` enumerations, use these new properties as optional input arguments:

- `outcomeIndex`

- DecOrCondIndex

See Also

[getSimulinkBlockHandle](#) | [cv.cvdatabgroup](#) | [slcoverage.Filter](#) |
[slcoverage.FilterRule](#) | [slcoverage.MetricSelector](#) | [slcoverage.BlockSelector](#)

Topics

[“Top-Level Model Coverage Report”](#)

[“Create, Edit, and View Coverage Filter Rules”](#)

addRule

Class: slcoverage.Filter

Package: slcoverage

Add coverage filtering rule to filter

Syntax

```
result = addRule(filter,rule)
```

Description

`result = addRule(filter,rule)` adds the filter rule to the specified filter.

Input Arguments

filter — Filter object to add the rule to

slcoverage.Filter object

Filter object to add the rule to, specified as an slcoverage.Filter object.

rule — Rule to add to the filter

slcoverage.FilterRule object

Rule to add to the filter, specified as an slcoverage.FilterRule object.

Output Arguments

result — Rule addition result

logical

Rule addition result, returned as 0 or 1.

Examples

Add Rule to Filter Object

Create a block selector, a filter, and a rule for the selector. Then add the rule to the filter.

Open the model. Specify coverage settings and turn on coverage recording.

```
modelName = 'slcoverage_lct_bus';  
open_system(modelName);  
set_param(modelName, 'CovMetricStructuralLevel', 'MCDC', 'RecordCoverage', 'on');
```

Create a BlockSelector object, bl. This block selector selects all blocks in the model with the property 'RelationalOperator'.

```
bl = slcoverage.BlockSelector(slcoverage.BlockSelectorType.BlockType, 'RelationalOperator');
```

Create a filter object, create a rule object, and add the rule to the filter object.

```
filt = slcoverage.Filter;  
rule = slcoverage.FilterRule(bl, 'Tested elsewhere', slcoverage.FilterMode.Exclude);  
filt.addRule(rule);
```

Version History

Introduced in R2017b

See Also

[slcoverage.Filter](#) | [slcoverage.FilterRule](#) | [slcoverage.MetricSelector](#) | [slcoverage.BlockSelector](#) | [slcoverage.SFcnSelector](#) | [removeRule](#)

removeRule

Class: slcoverage.Filter

Package: slcoverage

Remove rule from filter rule set

Syntax

```
result = removeRule(filter,rule)
```

Description

`result = removeRule(filter,rule)` removes the filter rule from the specified filter.

Input Arguments

filter — **Filter object to remove rule from**

slcoverage.Filter object

Filter object to remove the rule from, specified as an slcoverage.Filter object.

rule — **Rule to remove from the filter**

slcoverage.FilterRule object

Rule to remove from the filter, specified as an slcoverage.FilterRule object.

Output Arguments

result — **Rule removal result**

logical

Rule removal result, returned as 0 or 1.

Examples


Remove Rules from Filter Objects

This example shows how to remove a rule from a coverage filter programmatically.

Open the model and specify coverage settings.

```
modelName = 'slcoverage_lct_bus';  
open_system(modelName);  
set_param(modelName, 'CovMetricStructuralLevel', 'MDC', ...  
                'RecordCoverage', 'on');
```

This demonstration illustrates how the Legacy Code Tool is used to call legacy functions that have arguments of struct data type

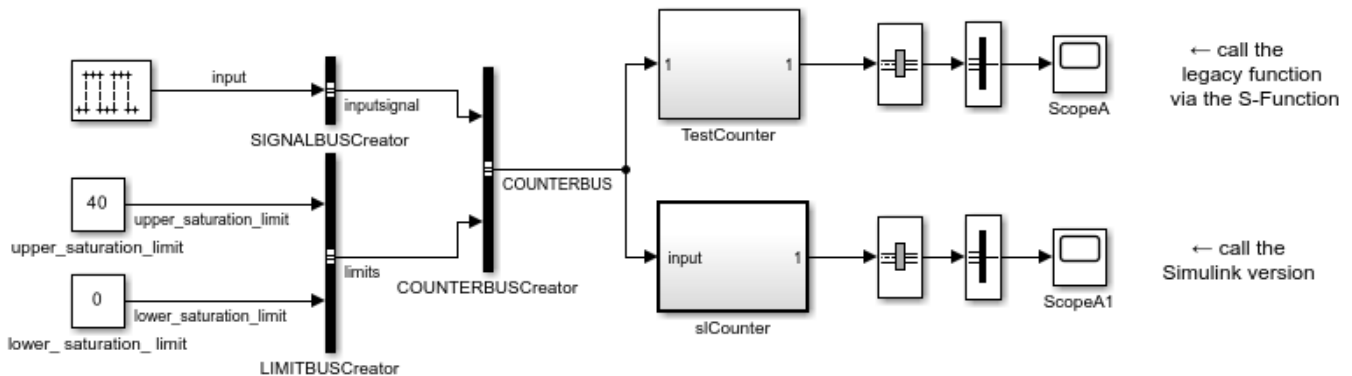

To view the sources for this demonstration click the links below.

- open legacy files [counter_bus.h](#) and [counter_bus.c](#)
- open registration script [sldemo_lct_bus_script.m](#)
- open generated S-Function [sldemo_sfuns_counterbus.c](#)

Copyright 1990-2013 The MathWorks, Inc.

Create two BlockSelector objects, blockSel1 and blockSel2.

```
blockSel1 = slcoverage.BlockSelector(...
    slcoverage.BlockSelectorType.BlockType, 'RelationalOperator');
blockSel2 = slcoverage.BlockSelector(...
    slcoverage.BlockSelectorType.BlockInstance, ...
    'slcoverage_lct_bus/slCounter/And');
```

Create a filter object, create two rule objects, and add each rule to the filter object.

```
filt = slcoverage.Filter;
rule1 = slcoverage.FilterRule(blockSel1, 'Tested elsewhere', ...
    slcoverage.FilterMode.Exclude);
rule2 = slcoverage.FilterRule(blockSel2, 'Value is never greater than 0');
filt.addRule(rule1);
filt.addRule(rule2);
```

Review the rules. Look the first rule in the array.

```
filtRules = filt.rules
filtRules(1)
```

```
filtRules =
```

```
1x2 FilterRule array with properties:
```

```
Selector
Mode
Rationale
```

```
ans =  
  
  FilterRule with properties:  
  
    Selector: [1x1 slcoverage.BlockSelector]  
      Mode: Exclude  
    Rationale: 'Tested elsewhere'
```

Remove the first rule that you added. Then review the rules to see that the first rule that you added is removed.

```
filt.removeRule(rule1);  
filtRules = filt.rules
```

```
filtRules =  
  
  FilterRule with properties:  
  
    Selector: [1x1 slcoverage.BlockSelector]  
      Mode: Justify  
    Rationale: 'Value is never greater than 0'
```

Version History

Introduced in R2017b

See Also

[rules](#) | [slcoverage.Filter](#) | [addRule](#) | [slcoverage.FilterRule](#)

rules

Class: `slcoverage.Filter`

Package: `slcoverage`

Rules for filter

Syntax

```
fr = rules(filter)
fr = rules(filter,element)
```

Description

`fr = rules(filter)` returns all the rules assigned to the filter.

`fr = rules(filter,element)` returns only the rules for the specified model element.

Input Arguments

filter — Filter object whose rules to return

`slcoverage.Filter` object

Filter object whose rules to return, specified as an `slcoverage.Filter` object.

element — Element identifier

Simulink ID | property | handle

This property is read-only.

Identifier of the model element whose rules to return, specified as a character vector or string of the Simulink ID, model element property, or handle.

Output Arguments

fr — Filter rules

`slcoverage.FilterRule` object | array of `slcoverage.FilterRule` objects

Filter rules, returned as an `slcoverage.FilterRule` object or an array of `slcoverage.FilterRule` objects.

Examples

Get All Rules for Filter Object

Open a model. Specify coverage settings and turn on coverage recording.

```
modelName = 'slcoverage_lct_bus';
open_system(modelName);
set_param(modelName,'CovMetricStructuralLevel','MDC','RecordCoverage','on');
```

Create a BlockSelector object, bl. Create a filter object, create a rule, and add the rule to the filter.

```
bl = slcoverage.BlockSelector(slcoverage.BlockSelectorType.BlockType, 'RelationalOperator');
filt = slcoverage.Filter;
rule = slcoverage.FilterRule(bl, 'Tested elsewhere', slcoverage.FilterMode.Exclude);
filt.addRule(rule);
```

Create another rule and add it to the filter object.

```
id = Simulink.ID.getSID('slcoverage_lct_bus/slCounter/And');
bl = slcoverage.BlockSelector(slcoverage.BlockSelectorType.BlockInstance, id);
rule = slcoverage.FilterRule(bl, 'Value is never greater than 0');
filt.addRule(rule);
```

Use rules to return the filter rules. View first rule in the array.

```
fi = filt.rules
fi(1)
```

```
fi =
```

```
1x2 FilterRule array with properties:
```

```
Selector
Mode
Rationale
```

```
ans =
```

```
FilterRule with properties:
```

```
Selector: [1x1 slcoverage.BlockSelector]
Mode: Exclude
Rationale: 'Tested elsewhere'
```

Use rules to return the rule only for the And block.

```
filt.rules(id)
```

```
ans =
```

```
FilterRule with properties:
```

```
Selector: [1x1 slcoverage.BlockSelector]
Mode: Justify
Rationale: 'Value is never greater than 0'
```

Version History

Introduced in R2017b

See Also

slcoverage.Filter | addRule | slcoverage.FilterRule | removeRule

allSelectors

Class: slcoverage.BlockSelector, slcoverage.CodeSelector, slcoverage.Selector, slcoverage.MetricSelector, slcoverage.SFcnSelector

Package: slcoverage

Selectors for model or code element

Syntax

```
sel = slcoverage.Selector.allSelectors(element)
sel = slcoverage.BlockSelector.allSelectors(element)
sel = slcoverage.CodeSelector.allSelectors(element)
sel = slcoverage.CodeSelector.allSelectors(element,Name,Value)
sel = slcoverage.MetricSelector.allSelectors(element)
sel = slcoverage.SFcnSelector.allSelectors(element)
sel = slcoverage.Selector.allSelectors(element,Name,Value)
```

Description

`sel = slcoverage.Selector.allSelectors(element)` returns all the selectors for the model element.

`sel = slcoverage.BlockSelector.allSelectors(element)` returns all the block selectors for element.

`sel = slcoverage.CodeSelector.allSelectors(element)` returns all the custom C/C++ code selectors for element.

`sel = slcoverage.CodeSelector.allSelectors(element,Name,Value)` , where `element` is a model and `Name,Value` specifies the simulation mode, returns all the custom C/C++ code selectors for the model in the specified simulation mode.

`sel = slcoverage.MetricSelector.allSelectors(element)` returns all the metric selectors for element.

`sel = slcoverage.SFcnSelector.allSelectors(element)` returns all the S-function selectors for element.

`sel = slcoverage.Selector.allSelectors(element,Name,Value)` returns selectors for element, with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

element — Model element to select

handle | Simulink ID

Model element to select, specified as a handle or the model element Simulink identifier.

Example: 'sldemo_lct_bus:18'

Name-Value Pair Arguments

Specify optional pairs of arguments as `Name1=Value1, ..., NameN=ValueN`, where `Name` is the argument name and `Value` is the corresponding value. Name-value arguments must appear after other arguments, but the order of the pairs does not matter.

Before R2021a, use commas to separate each name and value, and enclose `Name` in quotes.

Example: `'Type', slcoverage.BlockSelectorType.BlockInstance, 'Description', 'Outcome'`

Type — Selector type refinement

`slcoverage.BlockSelectorType value | slcoverage.CodeSelectorType value | slcoverage.MetricSelectorType value | slcoverage.SFcnSelectorType value`

Selector type refinement specified as one of the `slcoverage.BlockSelectorType`, `slcoverage.CodeSelectorType`, `slcoverage.MetricSelectorType`, or `slcoverage.SFcnSelectorType` values. Possible values:

- Block selector types:
 - `slcoverage.BlockSelectorType.BlockInstance` — An instance of a block or an external MATLAB function called by a MATLAB function block.
 - `slcoverage.BlockSelectorType.BlockType` — All blocks of the specified block type.
 - `slcoverage.BlockSelectorType.Chart` — A Stateflow chart.
 - `slcoverage.BlockSelectorType.MaskType` — Blocks that use the specified mask type.
 - `slcoverage.BlockSelectorType.State` — A Stateflow state.
 - `slcoverage.BlockSelectorType.StateAllContent` — Stateflow state and its contents.
 - `slcoverage.BlockSelectorType.StateflowFunction` — A Stateflow function.
 - `slcoverage.BlockSelectorType.Subsystem` — A subsystem block.
 - `slcoverage.BlockSelectorType.SubsystemAllContent` — A subsystem and its contents.
 - `slcoverage.BlockSelectorType.TemporalEvent` — A Stateflow temporal event.
 - `slcoverage.BlockSelectorType.Transition` — A Stateflow transition.
- Code selector types:
 - `slcoverage.CodeSelectorType.File` — A custom C or C++ code file name.
 - `slcoverage.CodeSelectorType.Function` — A custom C or C++ code function name.
 - `slcoverage.CodeSelectorType.Decision` — A custom C or C++ code decision.
 - `slcoverage.CodeSelectorType.Condition` — A custom C or C++ code condition.
 - `slcoverage.CodeSelectorType.DecisionOutcome` — A custom C or C++ code decision outcome.
 - `slcoverage.CodeSelectorType.ConditionOutcome` — A custom C or C++ code condition outcome.
 - `slcoverage.CodeSelectorType.MCDCOutcome` — A custom C or C++ code MCDC outcome.
 - `slcoverage.CodeSelectorType.RelationalBoundaryOutcome` — A custom C or C++ code relational boundary outcome.

- Metric selector types:
 - `slcoverage.MetricSelectorType.ConditionOutcome` objects select condition metric objective outcomes.
 - `slcoverage.MetricSelectorType.DecisionOutcome` objects select decision metric objective outcomes.
 - `slcoverage.MetricSelectorType.MCDCOutcome` objects select MCDC metric objective outcomes.
 - `slcoverage.MetricSelectorType.RelationalBoundaryOutcome` objects select outcome metrics related to relational boundary outcomes.
 - `slcoverage.MetricSelectorType.SaturationOverflowOutcome` objects select outcome metrics related to saturation on integer overflow outcomes.
- S-function selector types:
 - `slcoverage.SFcnSelectorType.SFcnName` selects the specified S-function.
 - `slcoverage.SFcnSelectorType.SFcnInstanceCppFileName` selects the coverage data in the generated code file for this block.
 - `slcoverage.SFcnSelectorType.SFcnInstanceCppFunction` selects a function.
 - `slcoverage.SFcnSelectorType.SFcnInstanceCppCondition` selects a condition outcome of the S-function block.
 - `slcoverage.SFcnSelectorType.SFcnInstanceCppDecision` selects a decision outcome of the S-function block.

Description — Description text to match

character vector or string

Description text to match for the selector that you want to return, specified as a character vector or string. For example, if you want to return only the selectors that include the text `F outcome` in the description, use this syntax:

```
s = slcoverage.Selector.allSelectors(id, 'Description', 'F outcome')
```

SimulationMode — Simulation mode

character vector or string

Simulation mode to run when selecting code filters, entered as one of the following:

Object Specification	Description
'normal' (default)	Extract code selectors for custom code in normal simulation, such as custom code called from a C Caller block or a Stateflow chart.
'sil'	Extract code selectors for code generated in Simulation-in-the-Loop (SIL) mode and code selectors for the top model code interface
'pil'	Extract code selectors for code generated in Processor-in-the-Loop (PIL) mode and code selectors for the top model code interface

Object Specification	Description
'xil'	If SIL-mode code exists, extract code selectors for code generated in SIL mode and extract code selectors for the top model code interface; otherwise, extract code selectors for code generated in PIL mode and extract code selectors for the top model code interface
'modelrefsil'	Extract code selectors for the model reference code interface in SIL mode
'modelrefpil'	Extract code selectors for the model reference code interface in PIL mode
'modelrefxil'	If SIL-mode code exists, extract code selectors for the model reference code interface in SIL mode, if the model is in SIL mode; otherwise, extract code selectors for the model reference code interface in PIL mode

Output Arguments

sel — Selectors for the model or code element

array of Selector objects

Selectors for the model or code element, returned as an array of Selector objects.

Examples

Get All Selectors

This example shows how to get all the selectors for an And block and then add a rule to justify or exclude a selector. Metric selectors can only be justified.

Load the model and set coverage settings

```
modelName = 'slvndemo_covfilt';
load_system(modelName);
set_param(modelName, 'CovEnable', 'on', 'CovMetricStructuralLevel', 'MCDC');
```

First, get the block handle for the And block.

```
id = getSimulinkBlockHandle([modelName, '/Saturation']);
```

Get the selectors using the block handle.

```
sel = slcoverage.Selector.allSelectors(id)
```

```
sel =
```

```
1x10 heterogeneous Selector (BlockSelector, MetricSelector) array with properties:
```

```
Description
Type
Id
```

```
ConstructorCode
```

The block has ten selectors. You can index into each one to see their contents. In this example, you want to justify the sixth selector.

```
sel(6)
```

```
ans =
```

```
MetricSelector with properties:
```

```
ObjectiveIndex: 2
OutcomeIndex: 2
Description: 'T outcome of input > upper limit in Saturate block "Saturation"'
Type: DecisionOutcome
Id: 'slvndemo_covfilt:5'
ConstructorCode: 'slcoverage.MetricSelector(slcoverage.MetricSelectorType.DecisionOutcome, 's
```

Create a justify rule, then create a filter object and add the rule to it.

```
rule = slcoverage.FilterRule(sel(6), 'Expected result');
filt = slcoverage.Filter;
filt.addRule(rule);
```

Save the filter and generate a coverage report.

```
filt.save('metrfilter');
csim = cvsim(modelName);
csim.filter = 'metrfilter';
cvhtml('cov', csim, '-sRT=0');
```

Get Selector by Type and Description

This example shows how to get a selector by type and description. In this example, you get all selectors for the False outcomes of the And block whose type is ConditionOutcome.

Load the model into memory.

```
modelName = 'slcoverage_lct_bus';
load_system(modelName);
load slcoverage_lct_data.mat
```

The slcoverage_lct_bus model has an S-Function. Build the S-Function by using legacy_code.

```
def = legacy_code('initialize');
def.SFunctionName = 'slcoverage_sfun_counterbus';
def.OutputFcnSpec = 'void counterbusFcn(COUNTERBUS u1[1], int32 u2, COUNTERBUS y1[1], int32 y2[1]';
def.HeaderFiles = {'counterbus.h'};
def.SourceFiles = {'counterbus.c'};
def.Options.supportCoverage = true;
legacy_code('generate_for_sim', def);
```

```
### Start Compiling slcoverage_sfun_counterbus
```

```
mex -IC:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex13162396 -c C:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex13162396
Building with 'Microsoft Visual C++ 2019 (C)'.
MEX completed successfully.
mex -IC:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex13162396 C:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex13162396
Building with 'Microsoft Visual C++ 2019 (C)'.
MEX completed successfully.
mex -IC:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex13162396 -c C:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex13162396
Building with 'Microsoft Visual C++ 2019 (C)'.
MEX completed successfully.
mex -IC:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex13162396 C:\TEMP\Bdoc22b_2054784_6060\ibB18F8B\15\tpab8d4205\slcoverage-ex13162396
Building with 'Microsoft Visual C++ 2019 (C)'.
MEX completed successfully.
### Finish Compiling slcoverage_sfuns_counterbus
### Exit
```

Get the false outcome condition selectors for the And block by searching for descriptions that include F.

```
id = getSimulinkBlockHandle([modelName, '/slCounter/And']);
sel = slcoverage.Selector.allSelectors(id, ...
    'Type', slcoverage.MetricSelectorType.ConditionOutcome, ...
    'Description', 'F')
```

```
sel =
```

```
1x2 MetricSelector array with properties:
```

```
ObjectiveIndex
OutcomeIndex
Description
Type
Id
ConstructorCode
```

Look at the constructor code for the two selectors that were returned.

```
sel.ConstructorCode
```

```
ans =
```

```
'slcoverage.MetricSelector(slcoverage.MetricSelectorType.ConditionOutcome, 'slcoverage_lct_b'
```

```
ans =
```

```
'slcoverage.MetricSelector(slcoverage.MetricSelectorType.ConditionOutcome, 'slcoverage_lct_b'
```

Version History

Introduced in R2017b

See Also

`slcoverage.MetricSelector` | `slcoverage.BlockSelector` | `slcoverage.CodeSelector` | `slcoverage.SFcnSelector` | `slcoverage.Selector`

setFilterName

Class: `slcoverage.Filter`

Package: `slcoverage`

Set name of coverage filter object

Syntax

```
setFilterName(filterObj,filterName)
```

Description

`setFilterName(filterObj,filterName)` sets the name of the filter to the specified value.

Input Arguments

filterObj — Coverage filter

`slcoverage.Filter` object

Coverage filter, specified as an `slcoverage.Filter` object.

Data Types: `slcoverage.Filter`

filterName — Coverage filter name

character array | string array

Coverage filter name, specified as a character array or string array.

Data Types: `char` | `string`

Examples

Edit and View Coverage Filter Details

This example shows how to use the `slcoverage.Filter` methods to set and get filter names and descriptions.

Create a new filter object by using the `slcoverage.Filter` class.

```
filt = slcoverage.Filter;
```

Set the filter name and description by using `setFilterName` and `setFilterDescription`, respectively.

```
setFilterName(filt,'myCovFilter');  
setFilterDescription(filt,'Justify missing coverage for unreachable outcomes');
```

Get the filter name and description by using `filterName` and `filterDescription` with the filter object as the input.

```
filtName = filterName(filt)  
filtDescr = filterDescription(filt)
```

```
filtName =
```

```
    'myCovFilter'
```

```
filtDescr =
```

```
    'Justify missing coverage for unreachable outcomes'
```

Alternatives

You can also create, edit, and view filters in Simulink. See “Create, Edit, and View Coverage Filter Rules” for more information.

Version History

Introduced in R2020a

See Also

`slcoverage.Filter` | `addRule` | `removeRule` | `rules` | `filterName` | `setFilterDescription` | `filterDescription` | `save`

Topics

“Filter Coverage Results Using a Script”

filterName

Class: slcoverage.Filter

Package: slcoverage

Get name of coverage filter object

Syntax

```
filtName = filterName(filterObj)
```

Description

`filtName = filterName(filterObj)` returns the name of the specified coverage filter.

Input Arguments

filterObj — Coverage filter

slcoverage.Filter object

Coverage filter, specified as an slcoverage.Filter object.

Data Types: slcoverage.Filter

Output Arguments

filtName — Filter name

character array | string array

Filter name, returned as a character array or string array.

Data Types: char | string

Examples

Edit and View Coverage Filter Details

This example shows how to use the slcoverage.Filter methods to set and get filter names and descriptions.

Create a new filter object by using the slcoverage.Filter class.

```
filt = slcoverage.Filter;
```

Set the filter name and description by using setFilterName and setFilterDescription, respectively.

```
setFilterName(filt, 'myCovFilter');  
setFilterDescription(filt, 'Justify missing coverage for unreachable outcomes');
```

Get the filter name and description by using `filterName` and `filterDescription` with the filter object as the input.

```
filtName = filterName(filt)
filtDescr = filterDescription(filt)
```

```
filtName =
```

```
    'myCovFilter'
```

```
filtDescr =
```

```
    'Justify missing coverage for unreachable outcomes'
```

Alternatives

You can also create, edit, and view filters in Simulink. See “Create, Edit, and View Coverage Filter Rules” for more information.

Version History

Introduced in R2020a

See Also

`slcoverage.Filter` | `addRule` | `removeRule` | `rules` | `setFilterName` | `setFilterDescription` | `filterDescription` | `save`

Topics

“Filter Coverage Results Using a Script”

setFilterDescription

Class: `slcoverage.Filter`

Package: `slcoverage`

Set description of coverage filter object

Syntax

```
setFilterDescription(filterObj, descr)
```

Description

`setFilterDescription(filterObj, descr)` sets the description of the filter to the specified value.

Input Arguments

filterObj — Coverage filter

`slcoverage.Filter` object

Coverage filter, specified as an `slcoverage.Filter` object.

Data Types: `slcoverage.Filter`

descr — Coverage filter description

character array | string array

Coverage filter description, specified as a character array or string array.

Data Types: `char` | `string`

Examples

Edit and View Coverage Filter Details

This example shows how to use the `slcoverage.Filter` methods to set and get filter names and descriptions.

Create a new filter object by using the `slcoverage.Filter` class.

```
filt = slcoverage.Filter;
```

Set the filter name and description by using `setFilterName` and `setFilterDescription`, respectively.

```
setFilterName(filt, 'myCovFilter');  
setFilterDescription(filt, 'Justify missing coverage for unreachable outcomes');
```

Get the filter name and description by using `filterName` and `filterDescription` with the filter object as the input.

```
filtName = filterName(filt)
filtDescr = filterDescription(filt)
```

```
filtName =
```

```
    'myCovFilter'
```

```
filtDescr =
```

```
    'Justify missing coverage for unreachable outcomes'
```

Alternatives

You can also create, edit, and view filters in Simulink. See “Create, Edit, and View Coverage Filter Rules” for more information.

Version History

Introduced in R2020a

See Also

`slcoverage.Filter` | `addRule` | `removeRule` | `rules` | `setFilterName` | `filterName` | `filterDescription` | `save`

Topics

“Filter Coverage Results Using a Script”

filterDescription

Class: slcoverage.Filter

Package: slcoverage

Get description of coverage filter object

Syntax

```
descr = filterDescription(filterObj)
```

Description

`descr = filterDescription(filterObj)` returns the description of the specified coverage filter.

Input Arguments

filterObj — Coverage filter

slcoverage.Filter

Coverage filter, specified as an slcoverage.Filter object.

Data Types: slcoverage.Filter

Output Arguments

descr — Filter description

character array | string array

Filter description, returned as a character array or string array.

Data Types: char | string

Examples

Edit and View Coverage Filter Details

This example shows how to use the slcoverage.Filter methods to set and get filter names and descriptions.

Create a new filter object by using the slcoverage.Filter class.

```
filt = slcoverage.Filter;
```

Set the filter name and description by using setFilterName and setFilterDescription, respectively.

```
setFilterName(filt, 'myCovFilter');  
setFilterDescription(filt, 'Justify missing coverage for unreachable outcomes');
```


Get the filter name and description by using `filterName` and `filterDescription` with the filter object as the input.

```
filtName = filterName(filt)
filtDescr = filterDescription(filt)
```

```
filtName =
```

```
    'myCovFilter'
```

```
filtDescr =
```

```
    'Justify missing coverage for unreachable outcomes'
```

Alternatives

You can also create, edit, and view filters in Simulink. See “Create, Edit, and View Coverage Filter Rules” for more information.

Version History

Introduced in R2020a

See Also

`slcoverage.Filter` | `addRule` | `removeRule` | `rules` | `setFilterName` | `filterName` | `setFilterDescription` | `save`

Topics

“Filter Coverage Results Using a Script”

save

Class: `slcoverage.Filter`

Package: `slcoverage`

Save coverage filter object to coverage filter file

Syntax

```
save(filterObj, fileName)
```

Description

`save(filterObj, fileName)` saves the specified filter object with the specified file name. The generated file will have the `.cvf` extension.

Input Arguments

filterObj — Coverage filter

`slcoverage.Filter` object

Coverage filter, specified as an `slcoverage.Filter` object.

Data Types: `slcoverage.Filter`

fileName — File name

character array | string array

File name, specified as a character array or string array.

Data Types: `char` | `string`

Examples

Create and Save a Coverage Filter

Create a filter object by using the `slcoverage.Filter` class, then set the filter name to `myCovFilter` using `setFilterName`.

```
filt = slcoverage.Filter;  
setFilterName(filt, 'myCovFilter')
```

Save the filter as `myCovFilter.cvf` by using `save`.

```
save(filt, 'myCovFilter')
```

Alternatives

You can also create and save filters in Simulink. See “Create, Edit, and View Coverage Filter Rules” for more information.

Version History

Introduced in R2020a

See Also

`slcoverage.Filter` | `addRule` | `removeRule` | `rules` | `setFilterName` | `filterName` | `setFilterDescription` | `filterDescription`

Topics

“Filter Coverage Results Using a Script”

cvdata

Access Simulink Coverage data in the MATLAB workspace

Description

cvdata objects store model coverage data.

Creation

A cvdata object is generated automatically when you simulate a model that has coverage enabled. You can access the coverage data by using coverage functions. The cvdata object becomes invalid if you close or modify its parent model.

Properties

dbVersion — Coverage data origin release

character array

This property is read-only.

Coverage data origin release, returned as a character array.

Data Types: char

id — Internal coverage data ID

scalar

This property is read-only.

Internal coverage data ID, returned as a scalar.

Data Types: double

type — Internal coverage data type

TEST_DATA | DERIVED_DATA

This property is read-only.

Internal coverage type, returned as either TEST_DATA for a single coverage simulation, or DERIVED_DATA for aggregated or cumulative coverage data.

Data Types: char

test — Test data

cvtest object

This property is read-only.

Test data, returned as a cvtest object. This property describes the coverage configuration.

Data Types: cvtest

rootID – Internal root ID

scalar

This property is read-only.

Internal root ID, returned as a scalar.

Data Types: double

checksum – Coverage data checksum

struct

This property is read-only.

Coverage data checksum, returned as a structure array. Some changes to the model cause the checksum to change, for example, editing the model structure like removing or adding blocks, or changing some configuration parameters. To aggregate coverage results, the `cvdata.checksum` properties must match.

Data Types: struct

modelinfo – Model information

struct

This property is read-only.

Model information, returned as a structure array. This property contains metadata about the model analyzed for coverage.

`cvdata.modelinfo` has the following fields:

Field	Description	Values
<code>modelVersion</code>	Version of the model analyzed for coverage.	character array containing version number
<code>creator</code>	Original creator of the model.	System name or organization name
<code>lastModifiedDate</code>	Date and time the model was last modified.	character array containing date and time
<code>defaultParameterBehavior</code>	Indicates the default parameter behavior setting.	'Tunable' 'Inlined'
<code>blockReductionStatus</code>	Indicates whether Block Reduction is enabled. See "Block Reduction" for more information.	'off' 'on'
<code>conditionallyExecuteInputs</code>	Conditional input execution switch. A value of 1 is 'on', and a value of 0 is 'off'.	1 0

Field	Description	Values
mdcdMode	Definition used for modified condition decision coverage (MCDC) analysis. A value of 1 indicates the model used the masking definition of MCDC and a value of 0 indicates the model used the unique-cause definition of MCDC. For more information, see “Modified Condition and Decision Coverage (MCDC) Definitions in Simulink Coverage”.	1 0
analyzedModel	Name of the analyzed model or model object. If analysis is scoped to a subsystem, Stateflow Chart, or other model object, this is the path to that model object.	character array
reducedBlocks	List of blocks reduced by the block reduction parameter, if it is enabled and any blocks are reduced.	character array
ownerModel	Model that is or contains the component under test. If you have a block diagram harness, this is the model that the harness tests. If you have a subsystem harness, this is the model that contains that subsystem.	character array
ownerBlock	If the model includes a subsystem harness, this is the subsystem that the harness is testing.	character array
harnessModel	Harness model name. If you have data aggregated from multiple test runs, where each run used a different harness with the same ownerModel, this field shows Not Unique.	character array
logicBlkShortcircuit	Indicates whether the short-circuiting option is enabled.	0 1

Data Types: struct

startTime — System time at simulation start
character array

System time at simulation start, returned as a character array.

Data Types: char

stopTime — System time at simulation stop

scalar

System time at simulation stop, returned as a character array.

Data Types: char

intervalStartTime — Coverage interval start time

scalar

Coverage interval start time, returned as a scalar. This value comes from the CovStartTime parameter. For more information, see “Coverage interval start time” on page 2-15.

Data Types: double

intervalStopTime — Coverage interval stop time

scalar

Coverage interval stop time, returned as a scalar. This value comes from the CovStopTime parameter. For more information, see “Coverage interval stop time” on page 2-16.

Data Types: double

filter — Coverage filter file name

character array | cell array

Coverage filter file name, returned as a character array or a cell array of character arrays. This property contains the coverage filter file name. If there is no coverage filter, this field is empty. You can apply a coverage filter after simulation by assigning the name of a valid filter file to this property.

Data Types: char | cell

simMode — Simulation mode

character array

Simulation mode, returned as a character array. For more information, see “Simulation mode”.

Data Types: char

excludeInactiveVariants — Whether to exclude inactive variants in coverage report

0 (default) | 1

Whether to exclude inactive variants in coverage report, specified as 0 or 1. Set this property to 0 to report inactive variants in the coverage report, and set this property to 1 to exclude inactive variants from the coverage report.

This property affects only Simulink variants with startup activation time and inactive variant configurations in Stateflow charts.

If you aggregate two or more cvdata objects with different values of excludeInactiveVariants, the resulting aggregated cvdata object has an excludeInactiveVariants property value of 0.

Example: covData.excludeInactiveVariants = 1;

Data Types: double

Object Functions

View and Save Coverage Results

cvhtml	Create HTML coverage report from model coverage objects
cvmodelview	Display model coverage results with model highlighting
cvresults	Returns active coverage data, clears and loads active coverage data from a file
cvsave	Save coverage settings and results to file

Extract Coverage Results from cvdata Objects

extract	Extract subsystem coverage data from system-level coverage data
complexityinfo	Retrieve cyclomatic complexity coverage information from cvdata object
conditioninfo	Retrieve condition coverage information from cvdata object
decisioninfo	Retrieve decision coverage information from cvdata object
executioninfo	Retrieve execution coverage information from cvdata object
getCoverageInfo	Retrieve coverage information for Simulink Design Verifier blocks from cvdata object
mcdcinfo	Retrieve modified condition/decision coverage information from cvdata object
overflowsaturationinfo	Retrieve saturation on integer overflow coverage from cvdata object
relationalboundaryinfo	Retrieve relational boundary coverage from cvdata object
sigrangeinfo	Retrieve signal range coverage information from cvdata object
sigsizeinfo	Retrieve signal size coverage information from cvdata object
tableinfo	Retrieve lookup table coverage information from cvdata object

You can use these specialized MATLAB operators with `cvdata` objects.

+	Returns the union of two <code>cvdata</code> objects. The returned <code>cvdata</code> object contains the total aggregated coverage for two simulations or tests.
-	Returns the set difference between the left and right operands. The returned <code>cvdata</code> object contains the coverage objective outcomes that are satisfied by the left operand but not the right operand. Use - to determine how much additional coverage is attributed to a specific simulation or test.
* and .*	Returns the intersection between two <code>cvdata</code> objects. The returned <code>cvdata</code> object contains only the coverage satisfied by both operands. Use * to confirm if there is overlapping coverage between two simulations or tests.

Examples

View Decision Coverage Data

This example shows how to view decision coverage data for a block in your model.

Load the model.


```
modelName = 'slvndemo_cv_small_controller';
load_system(modelName);
```

Configure the coverage settings for the model by using a `Simulink.SimulationInput` object.

```
simIn = Simulink.SimulationInput(modelName);
simIn = setModelParameter(simIn, 'CovEnable', 'on');
simIn = setModelParameter(simIn, 'CovMetricStructuralLevel', 'Decision');
simIn = setModelParameter(simIn, 'CovSaveSingleToWorkspaceVar', 'on');
simIn = setModelParameter(simIn, 'CovSaveName', 'covData');
```

Simulate the model by passing `simIn` as the input to `sim`.

```
simOut = sim(simIn);
```

Extract the coverage data as a `cvdata` object from the `SimulationOutput` object, `simOut`.

```
covData = simOut.covData;
```

View the decision coverage results for the Saturation block by calling `decisioninfo` with the block path.

```
blockPath = [modelName, '/Saturation'];
decisionCov = decisioninfo(covData, blockPath)
```

```
decisionCov =
```

```
     3     4
```

`decisioninfo` returns an array with two scalars. The first value is the number of satisfied decision outcomes, and the second value is the number of total decision outcomes. Use these to determine the percentage of satisfied decision outcomes for the Saturation block.

```
percentDecisionCov = 100 * decisionCov(1) / decisionCov(2)
```

```
percentDecisionCov =
```

```
    75
```

Version History

Introduced before R2006a

See Also

`cvsim` | `cv.cvdatagroup` | `sim`

Topics

“Automating Model Coverage Tasks”

“Operations on Coverage Data”

“Programmatically Retrieve Coverage Details from Results”

“Record Coverage in Parallel Simulations by Using Parsim”

