



REFERENCE MANUAL | PUBLIC

SAP Adaptive Server Enterprise 16.0 SP03

Document Version: 1.0 – 2020-03-04

Utility Guide

Content

- 1 Types of Utilities. 9**
- 1.1 Threaded Versions of Utilities. 9
- 1.2 Installation or Configuration Utilities. 9
- 1.3 Utilities for Languages, Character Sets, and Sort Orders. 10
- 1.4 Utilities to Start Servers. 11
- 1.5 Database Creation and Manipulation Utilities. 11
- 1.6 Utilities to Gather Information. 12
- 1.7 Tuning Utility. 12
- 1.8 Utility to Manage a Cluster. 13

- 2 Utility Commands Reference. 14**
- 2.1 aseuserstore. 16
- 2.2 auditinit. 19
- 2.3 backupserver. 22
- 2.4 bcp. 30
 - Usage for bcp. 46
- 2.5 buildmaster. 50
- 2.6 certauth. 50
- 2.7 certpk12. 50
- 2.8 certreg. 51
- 2.9 charset. 51
- 2.10 cobpre. 52
- 2.11 cpre. 52
- 2.12 dataserver. 53
 - Usage for dataserver. 60
- 2.13 ddlgen. 62
 - Usage for ddlgen. 82
- 2.14 defncopy. 88
- 2.15 dscp. 93
- 2.16 dsedit. 95
- 2.17 extractjava. 96
- 2.18 installjava. 99
 - Usage for installjava. 103
- 2.19 isql. 104
 - Usage for isql. 116
- 2.20 langinstall. 121
- 2.21 optdiag. 124

	Usage for optdiag.	129
2.22	preupgrade.	130
	Usage for preupgrade.	135
2.23	pwdcrypt.	136
2.24	qptune.	137
2.25	qrmutil.	143
2.26	showserver.	148
2.27	sqldbgr.	149
	Usage for sqldbgr.	151
2.28	sqlloc.	154
2.29	sqllocres.	156
2.30	sqlsrvr.	157
	Usage for sqlsrvr.	161
2.31	sqlupgrade.	163
2.32	sqlupgraderes.	165
2.33	srvbuild.	166
	Usage for srvbuild.	167
2.34	srvbuildres.	168
2.35	startserver.	170
	Usage for startserver.	171
2.36	sybatch.	172
2.37	sybcluster.	174
2.38	syconfig.	177
2.39	sybdiag.	178
	Usage for sybdiag.	184
2.40	sybdumptran.	185
	Usage for sybdumptran.	189
2.41	sybmigrate.	191
2.42	sybrestore.	196
2.43	sybtssmpasswd.	198
2.44	updatease.	199
2.45	xpserver.	201
3	Transfer Data to and from SAP ASE Using bcp.	204
3.1	Methods for Moving Data.	204
	Import and Export Data with bcp.	204
3.2	bcp Modes.	205
3.3	bcp Requirements.	206
	bcp Permissions.	206
	Before You Transfer.	207
3.4	bcp and Encryption.	208
3.5	Copy Data to Partitions Using bcp.	208

3.6	Improve bcp Performance.	209
	Fast, Fast-logged, and Slow bcp.	209
	Summary of Steps for Fast and Fast-logged bcp.	213
	Bulk Copying Data into Partitioned Tables.	214
	Using Parallel Bulk Copy to Copy Data into a Specific Partition.	216
3.7	Bulk Copying Encrypted Data.	221
3.8	bcp Options.	223
	Using the Default Formats.	223
	Change Terminators from the Command Line.	225
3.9	Change the Defaults in Interactive bcp.	225
	Respond to bcp Prompts.	226
	File Storage Type.	228
	Prefix Length.	230
	Field length.	231
	Field and Row Terminators.	232
3.10	Format Files.	234
3.11	Examples of Copying Out Data Interactively.	237
3.12	Examples of Copying In Data Interactively.	239
3.13	bcp and Alternate Languages.	242
3.14	Support for Initialization Strings.	243
3.15	bcp and Row-Level Access Rules.	243
3.16	Copy In and Batch Files.	243
	Improve Recoverability.	244
	Batches and Partitioned Tables.	244
3.17	Copy Out and Text and Image Data.	244
3.18	Specify a Network Packet Size.	245
3.19	Copy In and Error Files.	245
3.20	Copy Out and Error Files.	246
3.21	Data Integrity for Defaults, Rules, and Triggers.	246
3.22	How bcp Differs from Other Utilities.	247
4	Build Servers Using dataserver.	249
4.1	Building a New Master Device.	249
	Environments When Using dataserver.	250
	Specifying Device and Logical Page Sizes When Building a New SAP ASE Server.	251
	Starting an Existing a SAP ASE Server.	253
	Upgrading to a Server With Larger Page Sizes.	253
	Viewing the Current Server Limits.	254
5	View and Edit Server Entries Using dscp (UNIX).	255
5.1	Starting and Using dscp.	255
	Working with Server Entries.	256

5.2	Exiting dscp.	262
6	View and Edit Server Entries using dsedit.	264
6.1	Add, View, and Edit Server Entries.	264
6.2	Using dsedit in UNIX.	265
	Starting dsedit in UNIX.	266
	Open an Editing Session in UNIX.	266
	Modify Server Entries in UNIX.	267
	Copying a Server Entry to Another Interfaces File in UNIX.	269
	Copying Server Entries Within the Current Session.	269
	Copying Server Entries Between Sessions.	270
6.3	Using dsedit in Windows.	270
	Starting dsedit in Windows.	271
	Open an Editing Session in Windows.	271
	Modify Server Entries in Windows.	273
	Copying Server Entries Within the Current Session in Windows.	275
	Copying Server Entries Between Sessions in Windows.	276
6.4	Troubleshooting dsedit.	276
7	Using Interactive SQL from the Command Line.	278
7.1	Starting isql.	278
7.2	Stopping isql.	279
7.3	Using Transact-SQL in isql.	279
	Formatting isql Output.	280
	Correcting isql Input.	281
	set Options that Affect Output.	281
7.4	Changing the Command Terminator.	282
7.5	Performance Statistics Interaction with Command Terminator Values.	282
7.6	Input and Output Files.	283
	UNIX command line redirection.	283
8	Using Interactive SQL in Graphics Mode.	285
8.1	Starting Interactive SQL.	285
8.2	The Main Interactive SQL Window.	286
	Plan Dialog Tab.	287
8.3	The Interactive SQL Toolbar.	288
8.4	Open Multiple Windows.	288
8.5	Keyboard Shortcuts.	288
8.6	Display Data Using Interactive SQL.	289
8.7	Edit Table Values in Interactive SQL.	290
	Copying Rows from the Interactive SQL Result Set.	290
	Editing Rows from the Interactive SQL Result Set.	291

	Inserting Rows into the Database from the Interactive SQL Result Set.	291
	Deleting Rows from the Database Using Interactive SQL.	292
8.8	SQL Statements in Interactive SQL.	292
	Canceling an Interactive SQL Command.	293
	Combining Multiple Statements.	294
	Looking Up Tables, Columns, and Procedures.	294
	Recalling Executed Commands.	295
	Logging Commands.	296
8.9	Configure Interactive SQL.	297
	General Dialog Box.	297
	Result Dialog Box.	298
	Import/Export Dialog Box.	299
	Messages Dialog Tab.	299
	Editor Dialog Box.	300
	Query Editor Dialog Box.	300
8.10	Processing Command Files.	301
	Saving SQL Statements to a File.	301
	Executing Command Files.	302
	Saving, Loading, and Running Command Files.	302
8.11	The SQL Escape Syntax in Interactive SQL.	303
8.12	Interactive SQL Commands.	305
9	Interactive <code>sybcluster</code> Commands Reference.	306
9.1	Commands Active Before Connecting to a Cluster.	306
9.2	Commands Active After Connecting to a Cluster.	307
9.3	add backupserver.	308
9.4	add instance.	309
9.5	connect.	310
9.6	create backupserver.	311
9.7	create cluster.	312
9.8	create xpserver.	314
9.9	deploy plugin.	315
9.10	diagnose cluster.	317
9.11	diagnose instance.	318
9.12	disconnect.	319
9.13	drop backupserver.	320
9.14	drop cluster.	321
9.15	drop instance.	322
9.16	drop xpserver.	323
9.17	exit.	324
9.18	help.	324
9.19	localize.	325

9.20	quit	326
9.21	set backupserver	327
9.22	set cluster	328
9.23	set instance	330
9.24	set xpserver port	331
9.25	show agents	332
9.26	show backupserver config	334
9.27	show cluster	335
9.28	show instance	338
9.29	show membership mode	340
9.30	show session	340
9.31	show xpserver	342
9.32	shutdown cluster	343
9.33	shutdown instance	344
9.34	start cluster	345
9.35	start instance	346
9.36	upgrade server	346
9.37	use	349
10	Migrate Data Using sybmigrate	350
10.1	What sybmigrate Does	350
10.2	What sybmigrate Does Not Do	352
10.3	Before You Begin	353
	Permissions	353
	Platforms	354
	Environment Settings	354
	Migrating Proxy Tables	354
10.4	Migration process	355
	Overview of the Migration Process	355
	Pre-migration Considerations	355
	Configuration and Tuning for Higher Performance	357
	Possible Errors to Avoid	359
	Auto-select Dependent Objects for Migration	359
	Migrating an Archive Database	359
	GUI Mode	360
	Resource File Mode	366
10.5	Using sybmigrate with Encrypted Columns	370
10.6	Post-migration Activities	371
10.7	Migrate Databases in the Replication Server Domain	372
	Preparing for Migration	372
	Postmigration Procedures	373
	Migrating Databases That Support Wide Data	379

10.8	Limitations.	380
	Stopping High Availability.	380
	Other Limitations.	380
10.9	Troubleshooting and Error Messages.	381
11	Restore Databases Using sybrestore.	384
11.1	Before You Begin.	385
11.2	sybrestore Checks.	386
	Compatibility Geometry Check.	386
11.3	sybrestore Syntax.	386
11.4	Restoring a Database in Noninteractive Mode.	387
11.5	Restoring a Database in Interactive Mode.	388
	Interactive Menu Options.	390
	Logging sybrestore Output.	392
	Providing a Mapping Directory.	392
	Restoring a Database to a Point In Time.	393
	Restoring User and System Databases.	395
	Master Database Restore.	397

1 Types of Utilities

SAP ASE provides utility programs of various types.

1.1 Threaded Versions of Utilities

SAP includes the `_r` versions of some of the utilities for use with threaded drivers.

These utilities have threaded `_r` versions:

- `bcp`
- `cobpre`
- `cpre`
- `defncopy`
- `dscp`
- `isql`

Related Information

[bcp \[page 30\]](#)

[cobpre \[page 52\]](#)

[cpre \[page 52\]](#)

[defncopy \[page 88\]](#)

[dscp \[page 93\]](#)

[isql \[page 104\]](#)

1.2 Installation or Configuration Utilities

SAP ASE includes various utilities for installation and configuration.

Use these to install or configure databases:

- `auditinit` – allows you to install an audit system.
- `dataserver` – allows you to build a new SAP ASE server.
- `dscp` – allows you to view and edit server entries in the interfaces file from the command line.
- `dsedit` – allows you to view and edit server entries in the interfaces file using a GUI.

In Windows, allows you to create and modify network connection information in the interfaces file.

- `preupgrade` – performs tests on an installation or database to determine its readiness for upgrade, and reports problems found.
- `sqlupgrade` – upgrades your currently installed release of SAP ASE to the newest release.
- `sqlupgraderes` – upgrades your currently installed release of SAP ASE to the newest release using resource files in UNIX platforms.
- `srvbuild` – creates a new SAP ASE server, Backup Server, or XP Server with default or user-specified values for key configuration attributes using a graphical user interface.
- `srvbuildres` – creates a new SAP ASE server, Backup Server, or XP Server, using resource files to specify values for key configuration attributes in UNIX platforms.

Related Information

[auditinit \[page 19\]](#)

[dataserver \[page 53\]](#)

[dataserver \[page 53\]](#)

[dscp \[page 93\]](#)

[dsedit \[page 95\]](#)

[preupgrade \[page 130\]](#)

[sqlupgrade \[page 163\]](#)

[sqlupgraderes \[page 165\]](#)

[srvbuild \[page 166\]](#)

[srvbuildres \[page 168\]](#)

[updatease \[page 199\]](#)

1.3 Utilities for Languages, Character Sets, and Sort Orders

SAP ASE includes various utilities to set languages, character sets and sort orders.

- `charset` – loads the character sets and sort order files in Windows.
- `langinstall` – installs a new language on an SAP ASE server.
- `sqlloc` – installs and modifies languages, character sets, and sort order defaults for SAP ASE.
- `sqllocres` – installs and modifies languages, character sets, and sort order defaults for SAP ASE, using a resource file in UNIX platforms.

Related Information

[charset \[page 51\]](#)

[langinstall \[page 121\]](#)

[sqlloc \[page 154\]](#)

[sqllocres \[page 156\]](#)

1.4 Utilities to Start Servers

SAP ASE includes various utilities to start servers manually.

- `backupserver` – starts the Backup Server executable. To start Backup Server manually, use:
 - (UNIX) `startserver`
 - (Windows) `srvmgr`
- `dataserver` – starts the SAP ASE executable. Use `startserver` instead of this utility to start SAP ASE manually.
- `sqlsrvr` – starts the SAP ASE executable in Windows. Use the `services manager` utility instead of this utility to start SAP ASE manually.
- `srvmgr` – starts, pauses, and stops the SAP ASE server, Backup Server, and Adaptive Server Monitor™ as Windows services.
- `startserver` – starts an the SAP ASE server and a Backup Server in UNIX platforms.

Related Information

[startserver \[page 170\]](#)

[backupserver \[page 22\]](#)

[dataserver \[page 53\]](#)

[sqlsrvr \[page 157\]](#)

[startserver \[page 170\]](#)

1.5 Database Creation and Manipulation Utilities

SAP ASE includes various utilities to create and manipulate databases.

- `bcp` – copies a database table to or from an operating system file in a user-specified format.
- `ddlgen` – generates data definition language for server- and database-level objects in SAP ASE.
- `defncopy` – copies definitions for specified views, rules, defaults, triggers, or procedures from a database to an operating system file or from an operating system file to a database.
- `extractjava` – copies a retained JAR and the classes it contains from an SAP ASE server to a client file.
- `installjava` – installs a JAR from a client file into an SAP ASE database.
- `isql` – interactive SQL parser to the SAP ASE server.
- `optdiag` – displays optimizer statistics or loads updated statistics into system table.

Related Information

[bcp \[page 30\]](#)

[ddlgen \[page 62\]](#)

[defncopy \[page 88\]](#)

[extractjava \[page 96\]](#)

[installjava \[page 99\]](#)

[isql \[page 104\]](#)

[optdiag \[page 124\]](#)

1.6 Utilities to Gather Information

SAP ASE includes various utilities to gather information:

- `showserver` – shows the SAP ASE servers and Backup Servers that are currently running on the local machine in UNIX platforms.
- `sybdiag` – collects comprehensive SAP ASE configuration and environment data to help SAP Product Support diagnose server issues.
- `wdllvers` – provides information about the SAP ASE-related DLLs (dynamic link libraries) that are loaded into memory in Windows.

Related Information

[showserver \[page 148\]](#)

[sybdiag \[page 178\]](#)

1.7 Tuning Utility

`qptune` enables you to fix missing statistics and identify the best query plan, optimization goal, or other configuration settings, and apply them at the query or server level.

Related Information

[qptune \[page 137\]](#)

1.8 Utility to Manage a Cluster

(Cluster Edition only) Use the `sybcluster` utility to manage an SAP ASE shared-disk cluster. `sybcluster` provides a set of interactive, command line options for creating and managing a cluster.

Related Information

[sybcluster \[page 174\]](#)

2 Utility Commands Reference

Reference pages for the SAP ASE utility program commands.

In UNIX, you enter a utility program command at the system prompt in a UNIX shell.

In Windows, if a utility:

- Has an icon in the SAP for Windows or SAP for the Windows program group, double-click the icon to launch the utility program.
- Does not have an icon in the program group, enter the utility program command at the Windows command prompt to launch the utility program.

Place characters with special meaning to the shell (the command prompt in Windows), such as the backslash (\), asterisk (*), slash (/), and spaces, in quotes. Precede some special characters with the backslash (\) to “escape” them to prevent the shell (command prompt) from interpreting the special characters.

The utility programs available with SAP ASE are:

Utility	Description
aseuserstore	Add, update, list, and delete the connection information in the secure store.
auditinit	Install an audit system using the executable form of the auditinit program.
backupserver	The executable form of the Backup Server program.
bcp	Copies rows in a database table to or from an operating system file in a user-specified format.
buildmaster	See <code>dataserver</code> .
certauth	This utility is deprecated.
certpk12	This utility is deprecated.
certreq	This utility is deprecated.
charset	(UNIX only) Loads the character sets and sort order files.
cobpre	A precompiler for COBOL.
cpre	A precompiler for C.
dataserver	(UNIX only) An executable form of the SAP ASE program.
ddlgen	A Java-based tool that generates data definition language for server- and database-level objects in an SAP ASE server.
defncopy	Copies definitions for specified views, rules, defaults, triggers, procedures, or reports from a database to an operating system file or from an operating system file to a database.

Utility	Description
dscp	(UNIX only) Allows you to view and edit server entries in the interfaces file in command-line mode.
dsedit	Allows you to view and edit server entries in the interfaces file using a graphical user interface.
extractjava	Copies a retained JAR from an SAP ASE server to a client file.
installjava	Installs a JAR from a client file into an SAP ASE server.
isql	Interactive SQL parser to the SAP ASE server.
langinstall	Installs a new language on the SAP ASE server.
optdiag	Displays optimizer statistics or loads updated statistics into system tables.
preupgrade	Performs tests on an installation or database to determine its readiness for upgrade.
pwdcrypt	Creates and prints an encrypted LDAP password in the libtcl.cfg file.
qrmutil	(Cluster Edition only) allows you to back up, restore, and reconfigure the quorum device.
qptune	Enables you to fix missing statistics and identify the best query plan, optimization goal, or other configuration settings, and apply them at the query or server level.
showserver	Shows SAP ASE servers and Backup Servers that are currently running on the local machine.
sqldbgr	Debugs stored procedures and triggers.
sqlloc	Installs and modifies languages, character sets, and sort order defaults for the SAP ASE server in GUI mode.
sqllocres	Installs and modifies languages, character sets, and sort order defaults for the SAP ASE server in command-line mode.
sqlsrvr	An executable form of the SAP ASE program.
sqlupgrade	Upgrades your currently installed release of SAP ASE to the newest release in GUI mode.
sqlupgraderes	Upgrades your currently installed release of SAP ASE to the newest release in command-line mode.
srvbuild	Creates a new SAP ASE server, Backup Server, or XP Server in GUI mode with default or user-specified values for key configuration attributes.
srvbuildres	(UNIX only) Creates a new SAP ASE server, Backup Server, or XP Server in command-line mode with default or user-specified values for key configuration attributes.
startserver	(UNIX only) Starts an SAP ASE server or a Backup Server.

Utility	Description
sybatch	(Windows only) Creates a new SAP ASE server, Backup Server, or XP Server with default or user-specified values for key configuration attributes, as well as installs and modifies languages, character sets, and sort order defaults for SAP ASE.
sybcluster	Manages a shared-disk cluster.
syconfig	(Windows only) A GUI version of <code>sybatch</code> .
sybdiag	A Java-based tool that collects comprehensive configuration and environment data for the SAP ASE server.
sybmigrate	Enables you to migrate database from a server using 2K logical pages to a server using 4, 8, or 16K logical pages.
sybrestore	Enables you restore an SAP ASE database to the time of failure from the most current full database backup dump files.
sybtssmpasswd	Records or changes the user password and creates the Tivoli Storage Manager (TSM) encrypted password file, <code>TSM.PWD</code> , on the TSM client machine.
updatease	Reinstalls scripts and updates system stored procedures and messages after a minor upgrade.
xpserver	Starts XP Server manually.

i Note

These utility programs may allow you to use a `-P` parameter to enter your password. If security is an issue, do not use `-P` to specify your password; another user may have an opportunity to see it. Instead, log in as usual without the `-P` parameter, and let the SAP ASE server prompt you for your password.

2.1 aseuserstore

Use the `aseuserstore` utility to insert, list, and delete the connection information in the secure store. The `aseuserstore` executable file is located in:

- (UNIX) `$$SYBASE/OCS-16_0/bin`
- (Windows) `%SYBASE%\OCS-16_0\bin`

The following table summarizes the command options available for the `aseuserstore` utility:

Option	Description
<code>-h</code>	Displays the <code>aseuserstore</code> help.

Option	Description
-H <HOST>	<p>Sets the hostname in the secure user store and key paths to the specified host.</p> <p>When the <code>aseuserstore</code> utility stores a key in the secure store, it saves it in <code>\$HOME/.ase/<hostname></code>, where by default, <code><hostname></code> is the name of the host where you have executed the command.</p> <p>However, if required, you can use the <code>-H</code> option to override this default hostname.</p> <p>For example, the command, <code>aseuserstore -H myhost</code>, creates a new subfolder (<code>myhost</code>) in the <code>.ase</code> folder of the user's home directory.</p>
-v	Prints the version string and copyright notice.

User input:

You can use any of these methods to enter command arguments:

- Provide all arguments in a single command. This example creates a key called `myuserkey` for user `admin`:

```
set myuserkey "myhost 5000" admin <password>
```
- Specify `-i` for the utility's interactive mode.
- Specify `-V` for the utility's verbose mode.

Note

The commands (for example, `set` and `list`) are not case-sensitive. Keys in lowercase (for example, `mykey`) are always converted to uppercase (`MYKEY`) when added to the secure store. The arguments (for example, `username`) are case-sensitive.

Command	Parameters	Description
LIST	KEY	Lists entries for the provided key. Note that the <code>KEY</code> parameter is optional. When you run the <code>LIST</code> command without any key, all entries present in the secure store are displayed.
DELETE	KEY	Deletes entries for the key from the secure store.
SET	KEY	Creates a key in the secure store. When a key already exists in the secure store, the existing entry is overwritten with the new information.

Command	Parameters	Description
	ENV	Sets the connection environment, such as host, its port, and the optional database name.
	USERNAME	Sets the user name for the profile.
	PASSWORD	Sets the password for the username. The system prompts you to enter the password if you do not specify this. The password is not echoed on the screen.
CHANGEKEY		Changes the encryption key and then re-encrypts the records that were encrypted in the secure store.

Syntax

```
aseuserstore [<OPTION>] COMMAND [<PARAMETERS>]
```

Examples

Example 1

Creates a user key called `mykey`.

```
aseuserstore -i
Command: set
Key: mykey
Connection info: myhost 5976
Username: sa
Password:
```

Example 2

View the details, such as the username, host, and the port number for the user key (`mykey`).

```
aseuserstore list mykey
```

```
KEY: MYKEY
CON_ENV      : myhost 5976
USERNAME     : sa
PASSWORD     : ***
```

Example 3

Stores a user key (`mykey`) for the user (`user1`) with the password (`<password>`).

```
aseuserstore set mykey 'myhost 5000' user1 password
```

Example 4

Stores a user key (`mykey`) for an SSL-enabled SAP ASE Server with the server's SSL common name (CN) as `MyASE`.

```
aseuserstore set mykey 'myhost 6000 ssl="CN=MyASE"' user1 password
```

Example 5

Lists a user key called `mykey`.

```
aseuserstore -i
Command: list
KEY: MYKEY
CON_ENV      : myhost 5976
USERNAME     : sa
PASSWORD     : ***
```

Example 6

Updates the encryption key.

```
aseuserstore -V changekey
Execute CHANGEKEY command
Command CHANGEKEY completed successfully
```

Example 7

Deletes a user key called `mykey`.

```
aseuserstore -V delete mykey
Store directory /dev/user1/.ase/dev1
Execute DELETE command
Delete values:
ASE/MYKEY/DB_CON_ENV
ASE/MYKEY/DB_DATABASE_NAME
ASE/MYKEY/DB_USER
ASE/MYKEY/DB_PASSWORD
Deleting ASE/MYKEY/DB_CON_ENV
Deleting ASE/MYKEY/DB_DATABASE_NAME
Deleting ASE/MYKEY/DB_USER
Deleting ASE/MYKEY/DB_PASSWORD
Command DELETE completed successfully
```

2.2 auditinit

Install an audit system using the executable form of the `auditinit` program.

The `auditinit` executable file is located here:

- (UNIX) `$$SYBASE/$$SYBASE_ASE/bin`
- (Windows) `%SYBASE%\%SYBASE_ASE%\bin as auditinit.exe`

Syntax

```
auditinit [-v ] [-h ]  
[-a]  
[-c <charset>]  
[-e]  
[-D <user_data_directory >]  
[-l <language>]  
[-log <log_file>]  
[-r <resource_file>]  
[-s <release_directory>]
```

Parameters

- v**
prints the version string and exits.
- h**
prints the help information and syntax usage and exits.
- a**
validates an audit resource file.
- c**
sets the character set.
- e**
writes the environment to the log file and exits.
- D**
when specified, auditinit will read or write user data files (for example: interfaces, RUN_<server>, and so on) from or to this directory. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use **-D**, the SAP ASE server uses \$SYBASE (%SYBASE% on Windows) as the default.
- l**
specifies the language you want to use for the SAP ASE server.
- log**
indicates a user-defined log file where the output is stored.
- r**
specifies the name and location of the resources file for the SAP ASE server.
- s**
specifies the name and location of the SAP ASE directory.

Examples

Example 1

Starts the interactive `auditinit` utility. Use the utility to install an audit system, or modify devices in the current audit system:

`auditinit`

```
AUDITINIT
1. Release directory: /usr/u/sybase
2. Configure a Server product
```

Example 2

Writes the environment to the `auditinit` log file.

`auditinit -e`

```
The log file for this session is 'C:\Sybase\ASE-16_0\init\logs\log1120.007'.
```

Example 3

Validates the specified audit resource file:

`auditinit -a -r auditResource.rs`

Usage

To install an audit system, enter `auditinit` without any parameters to start the interactive utility.

Using the parameters, you can retrieve information about the current audit system.

i Note

When using `auditinit` in interactive mode, use the following shortcuts:

- `Ctrl+a` to accept and continue
- `Ctrl+x` to exit the screen
- `?` for help

On Windows platform, after you type `Ctrl+a`, also type "Enter" to continue.

Permissions

The system security officer manages the audit system.

Related Information

[Installation or Configuration Utilities \[page 9\]](#)

2.3 backupserver

The executable form of the Backup Server program.

Location of the Backup Server utility:

- (UNIX) \$SYBASE/\$SYBASE_ASE/bin
- (Windows) %SYBASE%\%SYBASE_ASE%\bin, as bcksrvr.exe

Syntax

i Note

Backup Server provides the following methods for argument binding –

- By using a character separator: This is done by using the '-' (single hyphen) separator, followed by the argument (if any), with or without any spaces. Specifying more than one argument after the separator is not permitted. For example, the argument -abDeH is interpreted as -a, containing the arguments bDeH.
- By using extended options: This is done by using the '--' (double hyphen) separator, followed by the valid option, and then the value: --option[=value].

```
backupserver
[-a, --admin_name=<sa/sso_name>]
[-A, --library-path=<pathname>]
[-b, --<variable_block>]
[-c, --tape-config-file=<tape_config_filename>]
[-C, --server-connections=<number_of_server_connections>]
[-D, --backupserver-trace=<n>]
[-e, --error-log=<error_log_filename>]
[-f, --config_filename=<config_filename>]
[-h, --hosts-allow-file=<hosts_allow_filename>]
[-H, --help=<[{0|1|2|3}[,display_width]]>]
[-I, --interface-file=<interface_filename>]
[-J, --charset=<SAP_character_set_name>]
[-L, --language=<SAP_language_name>]
[-m, --memory-size=<max_shared_memory>]
[-M, --sybmultbuf-file=<sybmultbuf_binary_pathname_filename>]
[-N, --network_connections=<number_of_network_connections>]
[-p, --packet-size=<n>]
[-P, --service-threads=<number_of_active_service_threads>]
[-S, --server-name=<server_name>]
[ --ssl-caroot-file=<ssl_CARoot_filename>]
[ --ssl-cipher=<ssl_cipher_suite_name>]
[ --ssl-identity-file=<ssl_identity_filename>]
[ --ssl-passwd=<ssl_identity_password>]
[ --ssl-version=<ssl_version>]
```

```
[-T, --openserver-trace=<trace_value>]
[ --use-ssl=<option>]
[-v, --<version>]
[-V, --verbosity-level=<level_number>]
[-z, --compression-level=<n>]
```

```
set retaindays <number_days>
```

Parameters

-a, --admin_name=<sa/sso_username>

Specifies the log-in name of the SA/SSO user who is authorized to configure the Backup Server from the Backup Server language handler. Default value: `sa`.

-A, --library-path=<pathname>

Specifies the path to the directory of the dynamically loadable library of the Archive API.

-b, --<variable_block>

Specifies the variable block size to use when writing to tape devices.

-c, --tape-config-file=<tape_config_filename>

Specifies the name and location of the tape configuration file in which to search for configuration information on a tape device before performing a `dump database` or `dump transaction` operation. If you do not specify `-c`, the default path (`$SYBASE/backup_tape.cfg`) for the tape configuration file is picked up.

-C, --server-connections=<number_of_server_connections>

Specifies the number of server connections to use for the Backup Server. Limit: A maximum of three times the number of expected, concurrent dump and load sessions. Default value: 30 server connections. Connection requirements:

- Two connections for each dump session
- One connection for each load session
- One connection for volume change messages

-D, --backupserver-trace=<n>

Specifies the bitmask (base-10 number) of the diagnostic flag used within Backup Server.

-e, --error-log=<error_log_filename>

Specifies the name and location of the Backup Server error log file which logs and reports errors for SAP Open Server, `sybmultbuf`, disconnected sessions, and those that halt the Backup Server. All other errors are sent to the `notify` destination specified in the commands `dump database`, `dump transaction`, `load database`, and `load transaction`.

-f, --config_filename=<config_filename>

Specifies the name of the Backup Server configuration file. Default configuration filename: `$SYBASE/<servername>.cfg`

-h, --hosts-allow-file=<hosts_allow_filename>

Specifies the name of the Backup Server Access Control File. This parameter enables a remote access control feature that prevents remote dumps and loads, and the execution of remote procedure calls (RPCs) from any client or server running on unauthorized servers.

-H, --help=<[0|1|2|3][,display_width]>

Displays/prints on-screen all `backupserver` options, arguments, and parameters along with a brief description for each, and then exits. Using the command with just `-H` displays help in the default format and window size (display width). Using the extended option `--help` enables the use of formatting arguments 0, 1, 2, and 3:

- `<0>`: Works as the default option (same as 1).
- `<1>`: Output is displayed GNU-style, split into two columns.
- `<2>`: Descriptions are displayed in a new line.
- `<3>`: Same as 1, except for the addition of a blank line between the output for each argument/option.
- `<display_width>`: Allows you to specify the window width (in chars).

-I, --interface-file=<interface_filename>

Specifies the name and location of the interfaces file to search for when connecting to Backup Server. If `-I` is omitted, `backupserver` looks for a file named `interfaces` in the directory pointed to by your SYBASE environment variable. On Windows, the default file name is `SQL.INI`, and it is located in the directory `$SYBASE/ini`.

-J, --charset=<SAP_character_set_name>

Specifies the default character set for Backup Server.

-L, --language=<SAP_language_name>

Specifies the default language for Backup Server. If not specified, Backup Server uses the locale specified by the environment variable `LC_ALL`, or `LANG`. If these variables are not set, Backup Server searches for the entry `default` in the file `locales.dat`.

i Note

The parameter `-L` overrides the value set in the environment variable `LANG`.

-m, --memory-size=<max_shared_memory>

Specifies the maximum amount of shared memory (in megabytes) that Backup Server can use for all dump or load sessions.

-M, --sybmultbuf-file=<sybmultbuf_binary_pathname_filename>

Specifies the file name and full path name for the `sybmultbuf` binary executable. Use this parameter only when starting Backup Server from a directory other than `bin` in the SAP ASE installation directory, or when using a diagnostic version of `sybmultbuf`.

-N, --network_connections=<number_of_network_connections>

Specifies the total number of network connections that the master Backup Server can initiate. Default value: 25.

-p, --packet-size=<n>

Specifies the TDS packet size (in bytes) that the local Backup Server requests from the remote Backup Server during network dumps. The actual packet size used is limited to

the `<--packet_size=size_spec>` value of the remote Backup Server. Default value: 2048 bytes. Range: Integer; greater than or equal to 256.

-P, --service-threads=<number_of_active_service_threads>

Enables you to increase the number of stripes during multiple dump/load operations (with a maximum of 12,286 stripes per operation).

-S, --server-name=<server_name>

Specifies the name of the Backup Server that you want to start. If it is not specified here, it is read from the configuration file for the purpose. If there is no configuration file, or if it is set as `DEFAULT` in it, the environment variable `DSLISTEN` is used instead. If `DSLISTEN` is not set either, the default server name `SYB_BACKUP` is used. This entry must specify a name for the Backup Server in the interfaces file.

--ssl-caroot-file=<ssl_CAroot_filename>

Species the name of the root identity file issued by the SSL Certifying Authority (CA). Default file names:

- (UNIX) `$SYBASE/config/trusted.txt`
- (Windows) `$SYBASE/ini/trusted.txt`

--ssl-cipher=<SSL_cipher_suite_name>

Specifies the accepted SSL cipher suite(s) to use with Backup Server. To specify multiple suites at once, separate them with commas. By default, the following cipher suites are defined in SAP ASE:

- `TLS_RSA_WITH_AES_128_GCM_SHA256`
- `TLS_RSA_WITH_AES_256_GCM_SHA384`
- `TLS_RSA_WITH_AES_256_CBC_SH`
- `TLS_RSA_WITH_AES_128_CBC_SHA`
- `TLS_RSA_WITH_3DES_EDE_CBC_SHA`
- `TLS_RSA_WITH_RC4_128_SHA`
- `TLS_RSA_WITH_RC4_128_MD`

--ssl-identity-file=<ssl_identity_filename>

Specifies the path to the SSL identity file that contains the digital certificate and the associated private key.

--ssl-passwd=<ssl_identity_password>

Specifies the SSL identity password, which decrypts the private key of the SSL certificate.

--ssl-version=<ssl_version>

Specifies the SSL version to use with Backup Server. Available values: `TLSv1`, `TLSv1.1`, and `TLSv1.2`. Default value: `TLSv1`.

-T, --openserver-trace=<trace_value>

Interprets `<trace_value>` as a bitmask (base-2 number). The 1 bits in `<trace_value>` correspond to trace flags turning on in SAP Open Server. If you specify more than one `-T` parameter with the command, the final `-T` value overrides the values from earlier `-T` parameters. `<trace_value>` must be a positive integer.

--use-ssl=<option>

Specifies whether to enable or disable SSL. Permitted values: `True` (enabled) or `False` (disabled). Default: `False` (disabled).

-v, --<version>

Prints on-screen the version number and copyright message of the Backup Server utility, and then exits.

-V, --verbosity-level=<level_number>

Limits the verbosity of messages that are printed to the Backup Server error log. The variable `<level_number>` indicates the degree (level) of error verbosity to use for the error logs, and is one of:

Table 1: Levels of error verbosity

<code><level_number></code>	Message types printed to the error log
<code>-V4</code>	All <code>-V0</code> messages except "Connection from Server" messages printed for each connection event.
<code>-V3</code>	Only completion messages from a normal dump or load command, and the following types of messages: <ul style="list-style-type: none"> • Error messages from Backup Server and <code>sybmultbuf</code> • Other <code>sybmultbuf</code> messages • Volume change messages • SAP Open Server messages • Trace print messages • Informational messages from the System & Tape Auto Config modules
<code>-V2</code>	<ul style="list-style-type: none"> • All <code>-V3</code> messages • File creation and file mount messages
<code>-V1</code>	<ul style="list-style-type: none"> • All <code>-V2</code> messages • Phase messages
<code>-V0 (default)</code>	All messages (including backup progress)

This limit does not apply to messages that are sent to the client or console as determined by the parameter `NOTIFY=` in a `dump` or `load` command.

It also does not affect logging for the following message types:

- SAP Open Server messages
- Trace printing messages from `bs_traceprint`
- `sybmultbuf` messages

-z, --compression-level=<n>

Specifies to use this compression level (`<n>`) by default.

set retaindays <number_days>

specifies the number of days that Backup Server protects you from overwriting the dump. If you try to overwrite the dump before it expires, Backup Server requests confirmation before overwriting. `<number_days>` must be a positive integer or 0 (default), meaning dumps can be overwritten.

The value of this option takes effect when you don't

- provide the `retaindays` option in the dump database or dump transaction command, and;
- set the `tape retention in days` value with `sp_configure`.

Examples

Example 1

Boots the Backup Server `SYB_BACKUP` with default parameters:

```
backupserver --server_name=SYB_BACKUP &
```

Example 2

Boots the Backup Server with default parameters, and specifies a custom path for the `error-log` file:

```
backupserver --error-log=/ase/ase160sp03plx/devices/backup.log &
```

By default, Backup Server uses a log file with the filename `<name_of_the_backup_server>_srv.log`, which is located in the directory where it boots. You can change this by executing either the `set config` command, or by adding the parameter `--error-log` at boot time.

Example 3

Sets the default language of the Backup Server to `utf8`, and the character-set to `binary`:

```
backupserver --language=utf8 --charset=binary &
```

Example 4

Sets the dump retention period to 4 days:

```
isql -Usa -P<sapassword> -SBS1
set retaindays 4
go
```

Usage

i Note

Starting with SAP ASE version 16.0 SP03 PL04 –

- Use the 64-bit version of Backup Server to develop new applications. The 32-bit version has reached end of life (see [SAP Note 2274604](#)👉)
- 32-bit versions of Backup Server binaries are not included/supported.
- In versions of SAP ASE earlier than 16.0 SP03 PL04, both 32- and 64-bit versions of the binaries `backupserver`, `sybmultbuf`, `libcompress.so` and `libsyb_tsm.so` were supported and included with the SAP ASE package. From SAP ASE version 16.0 SP03 PL04 onwards, only the 64-bit version of these binaries is included/supported.

If you still need to use 32-bit binaries (for example, if you are using a 32-bit API), do one of the following:

- Rename files:

1. Rename the 32-bit version files to their 64-bit version names:

32-bit version Filename	64-bit version Filename
backupserver	backupserver64
sybmultbuf	sybmultbuf64
libcompress.so	libcompress64.so
libsyb_tsm.so	libsyb_tsm64.so

2. Rename the 32-bit version files to their standard binary version names:

32-bit version Filename	Standard Binary Version Filename
backupserver32	backupserver
sybmultbuf32	sybmultbuf
libcompress32.so	libcompress.so
libsyb_tsm32.so	libsyb_tsm.so

Or,

- Edit the file `RUN_BS`, and replace the standard binary entries with 32-bit binary entries:

To remove: Standard Entry	To add: 32-bit Entry
backupserver	backupserver32
sybmultbuf	sybmultbuf32
(If you are using compression) libcompress.so	libcompress32.so
(If you are using the Tivoli Storage Manager) libsyb_tsm.so	libsyb_tsm32.so

- Guidelines for the Backup Server configuration file:
 - If the configuration file is not specified using the flag `-f`, SAP ASE attempts to open the file located in the path `$$SYBASE/<bsname>.cfg`.
 - If the configuration file does not exist, it will still be created (even if it is not specified). SAP ASE attempts to open the file at `$$SYBASE/defaultbs.cfg`, and to copy it into `$$SYBASE/<bsname>.cfg`, or to the specified path/name.
 - If SAP ASE needs to access the file `$$SYBASE/defaultbs.cfg`, and if it isn't found (or if it doesn't exist), SAP ASE creates it. If it fails, all the fields are set to DEFAULT in any other configuration file that gets created in the process.

- If SAP ASE fails to create the configuration file in the folder `$$SYBASE`, it attempts to create it in the folder `/tmp` on UNIX, or in the temporary directory on Windows (defined by the variables `TMP`, `TEMP`, `USERPROFILE`, or `WINDIR`, in that order).
- If all of the above fail, the Backup Server will not boot.
- In SAP ASE version 15.5 and later, both the SAP ASE server and Backup Server can bypass the operating system buffer cache when you enable the `directio` parameter for the device using `disk init`, `disk reinit`, or `sp_deviceattr`. the SAP ASE server passes the device options to Backup Server, which enables Backup Server to access the database device with the appropriate `directio` option.
- Backup Server versions 15.0.3 and earlier do not work with SAP ASE 15.5 and later.
- Start Backup Server with the command `startserver` (see [startserver \[page 170\]](#)) rather than by directly executing the command `backupserver`.
 - To change default values in UNIX, edit the `RUN_<servername>` file in your SAP ASE installation directory.
 - To change default values in Windows, use Server Config to change the command line parameters for Backup Server. See the *SAP ASE Configuration Guide* for details.
- Ensure that the device driver options you include with the `dump` command are accurate, since Backup Server does not verify these. For example, if you include an option that forces Backup Server to rewind a tape before use, it will always rewind the tape to the beginning instead of reading the tape from the point of the dump.
- (UNIX and Windows) If you do not specify a name for the Backup Server (with the `-s` parameter), and if you haven't already set the environment variable `DSLISTEN`, the Backup Server utility assigns a default name to the Backup Server (`SYB_BACKUP`).
- The Backup Server and any SAP ASE servers that dump or load directly through the Backup Server should share the same interfaces file (`sql.ini` in UNIX). This file must contain entries for the Backup Server, and any other Backup Servers with which this Backup Server communicates.
- Trace flags (used with the command) print diagnostic information for the Backup Server as it runs. This information is used for troubleshooting. For details, see *SAP Open Server Server-Library/C Reference Manual*.
- Backup Server provides multithread support needed for Tivoli Storage Manager (TSM) options such as LAN-FREE. To enable multithread support for TSM options, use the option `-D8192` during Backup Server startup (this feature is not enabled by default). For example:

```
${BACKUPSERVER} -SSYB_BACKUP -I$SYBASE/interfaces -M${SYBMULTBUF} -D8192&
```

- If Backup Server is unable to locate the directories `locales` and `charsets` as specified by the parameters `-L` and `-J`, or if these parameters specify an incorrect language and character set combination, Backup Server issues an error message and uses the default language and character set. Backup Server does not support the use of the SAP Open Server-defined `SRV_TR` symbols for `-T`.
- Backup Server cannot perform loads or dumps between servers that use different logical page sizes. For example, loading a 4K logical page-sized database dump into another server using a 4K logical page size works just fine. However, dumping a 4K logical page-sized database, and loading it into a database that uses a 16K logical page size, does not work.

Permissions

- Any user with execute permission on the `backupserver` binary, and with read/write access to all the files.

- Only the SA/SSO user is allowed to check or set configuration options using the language handler. By default, the password field for the admin user is left empty, and it cannot be set from the command line. When the Backup Server is first configured, the system administrator executes the following command to set a `<new_password>`:

```
SET ADMIN_PASSWORD <new_password>
```

This password is encrypted and stored in the configuration file. The configuration file is created with restricted permissions.

- By default, the SA/SSO username is set to `sa`. It can be changed by issuing the following command:

```
SET ADMIN_USER <new_admin_username>
```

- Unlike in SAP ASE, Backup Server accepts incoming connections from any host defined in the `hosts.allow` file, irrespective of the username and password used. However, when a user with improper credentials attempts to check or set configuration options, an error is triggered. The following example illustrates this scenario:

```
$ isql -Uanyuser -Panypassword -SBS1
1> show config
2> go
Backup Server: 10.2.2.1: User is not authorized to execute 'show' command.
Backup Server: 9.15.1.1: Invalid user/password combination
1> set network_connections 30
2> go
Backup Server: 10.2.2.1: User is not authorized to execute 'set' command.
Backup Server: 9.15.1.1: Invalid user/password combination
```

Related Information

[Utilities to Start Servers \[page 11\]](#)

[startserver \[page 170\]](#)

2.4 bcp

Copies a database table to or from an operating system file in a user-specified format.

`bcp` provides a convenient and high-speed method for transferring data between a database table or view and an operating system file. `bcp` can read or write files in a wide variety of formats. When copying in from a file, `bcp` inserts data into an existing database table; when copying out to a file, `bcp` overwrites any previous contents of the file.

The utility is located in:

- (UNIX) `$$SYBASE/$SYBASE_OCS/bin`.
- (Windows) `%SYBASE%\%SYBASE_OCS%\bin, as bcp.exe`.

i Note

For parallel bcp, on:

- UNIX platforms – use `bcp_r`. The executable is in the same directory as the standard `bcp` command.
- Windows – use the standard `bcp.exe` utility.

Syntax

```
bcp [[<database_name>.]<schema_name>].<owner>.<table_name> [: <partition_id> | <slice_number>]
    [partition <partition_name>] {in | out} [<datafile>]
    [-a <display_charset>]
    [-A <packet_size>]
    [-b <batch_size>]
    [-c]
    [-C]
    [-d <discardfileprefix>]
    [-e <errfile>]
    [-E]
    [-f <formatfile>]
    [-F <firstrow>]
    [-H <hostname>]
    [-g <id_start_value>]
    [-i <input_file>]
    [-I <interfaces_file>]
    [-J <client_character_set>]
    [-K <keytab_file>]
    [-k <secure_store_key>]
    [-L <lastrow>]
    [-m <maxerrors>]
    [-M <LabelName> <LabelValue>] [-labeled]
    [-n]
    [-N]
    [-o <output_file>]
    [-P <password>]
    [-Q]
    [-r <row_terminator>]
    [-R <remote_server_principal>]
    [-S <server>]
    [-t <field_terminator>]
    [-T <text_or_image_size>]
    [-U <username>]
    [-v]
    [-V [<security_options>]]
    [-W]
    [-x <trusted.txt_file>]
    [-X]
    [-y <alternate_home_directory>]
    [-Y ]
    [-z <language>]
    [-Z <security_mechanism>]
    [--colpasswd [[<db_name>.<owner>].<table_name>.<column_name> [<password>]]]
    [--keypasswd [[<db_name>.<owner>].<key_name> [<password>]]]
    [--hide-vcc]
    [--initstring "<TSQL_command>"]
    [--maxconn <maximum_connections>]
    [--show-fi]
    [--skiprows <nSkipRows>]
```

Parameters

<database_name>

is optional if the table being copied is in your default database or in `master`. Otherwise, specify a database name.

<schema_name>

(SQLScript-enabled databases only) name of the schema to which the table belongs

<owner>

is optional if you or the database owner owns the table being copied. If you do not specify an owner, `bcP` looks first for a table of that name that you own, then looks for one owned by the database owner. If another user owns the table, specify the owner name or the command fails.

<table_name>

specifies the name of the database table to copy. The table name cannot be a Transact-SQL reserved word.

<partition_id>

specifies the partition number into which data is to be copied. Supported only for `bcP in`, <partition_id> is the equivalent of <slice_number> in SAP ASE 12.5.x.

<slice_number>

specifies the number of the slice of the database table into which data is to be copied. Supported only for `bcP in` and only for round-robin partitioned tables in SAP ASE 15.0 and later.

partition <partition_name>

specifies the name of the partition in the SAP ASE server. For multiple partitions, use a comma-separated list of partition names.

in | out

specifies the direction of the copy. `in` indicates a copy from a file into the database table; `out` indicates a copy to a file from the database table or view.

i Note

`bcP` raises an error and stops if the number of rows to be copied in or out exceeds 2147483647.

<datafile>

specifies the full path name of an operating system file. The path name can be 1 to 255 characters long. For multiple files, use a comma-separated list of file names. If you enter more than one data file and partition name, the number of files and partitions must be the same.

-a <display_charset>

allows you to run `bcP` from a terminal where the character set differs from that of the machine on which `bcP` is running. Using `-a` in conjunction with `-J` specifies the character set translation file (`.xlt` file) required for the conversion. Use `-a` without `-J` only if the client character set is the same as the default character set.

You see this error message if the character translation file named with the `-a` parameter is missing, or you mistype the name:

```
Error in attempting to determine the size of a pair of
translation tables. : 'stat' utility failed.
```

-A <packet_size>

specifies the network packet size to use for this `bcf` session. For example, set the packet size to 4096 bytes for the current `bcf` session, use:

```
bcf pubs2..titles out table_out -A 4096
```

<packet_size> must be:

- Between the values of the default network packet size and maximum network packet size configuration variables,
- A multiple of 512.

To improve the performance of large bulk-copy operations, use network packet sizes that are larger than the default value.

-b <batchsize>

specifies the number of rows per batch of data copied. By default, `bcf in` copies <n> rows in one batch, where <n> is equal to the batch size. Batch size applies only when you are bulk copying in; it has no effect on bulk copying out. The smallest number `bcf` accepts for <batchsize> is 1. The largest number `bcf` accepts for <batchsize> is 2147483647L.

i Note

Set the batch size to 1 for the SAP ASE server to allocate one data page to one row copied in. This option applies only to fast `bcf`, and is useful only in locating corrupt rows of data. Use `-b1` with care—doing so causes a new page to be allocated for each row, and is an inefficient use of space.

-c

performs the copy operation using the `char` datatype as the default. This option does not prompt for each field; it uses `char` as the default storage type, no prefixes, `\t` (tab) as the default field terminator, and `\n` (newline) as the default row terminator.

-C

supports bulk copy of encrypted columns if the SAP ASE server supports encrypted columns. `-C` enables the `ciphertext` option before initiating the bulk copy operation.

-d <discardfileprefix>

logs the rejected rows into a dedicated discard file. The discard file has the same format as the host file and is created by appending the input file name to the discard file prefix supplied. You can correct the rows in this file and use the file to reload the corrected rows.

- You can use `-d <discardfileprefix>` with `-e <errorfile>` to help identify and diagnose the problem rows logged in the discard file.

- Specifying the `-d` option applies only when bulk copying in; it is silently ignored when used in bulk copying out.
- If there are no rejected rows, no discard file is created.
- If you use multiple input files, one discard file is created for every input file that has an erroneous row. If there are no rejected rows, no discard file is created.
- If `bcpl` reaches the maximum errors allowed and stops the operation, all the rows, from the beginning of the batch until the failed row are logged.

`-e <errfile>`

specifies the full path name of an error file where `bcpl` stores any rows that it was unable to transfer from the file to the database. Error messages from `bcpl` appear on your terminal. `bcpl` creates an error file only when you specify this parameter.

We recommend that you use `-e <errorfile>` with `-d <discardfileprefix>` to help identify and diagnose the problem rows logged in the discard file.

`-E`

explicitly specifies the value of a table's `IDENTITY` column.

By default, when you bulk copy data into a table with a `IDENTITY` column, `bcpl` assigns each row a temporary `IDENTITY` column value of 0. This is effective only when copying data into a table. `bcpl` reads the value of the ID column from the data file, but does not send it to the server. Instead, as `bcpl` inserts each row into the table, the server assigns the row a unique, sequential `IDENTITY` column value, beginning with the value 1. If you specify the `-E` flag when copying data into a table, `bcpl` reads the value from the data file and sends it to the server, which inserts the value into the table. If the number of inserted rows exceeds the maximum possible `IDENTITY` column value, the SAP ASE server returns an error.

By default, when you bulk copy data from a table with a `IDENTITY` column, `bcpl` excludes all information about the column from the output file. If you specify the `-E` flag, `bcpl` copies the existing `IDENTITY` column values into the output file.

The `-E` parameter has no effect when you are bulk copying data out. the SAP ASE server copies the `ID` column to the data file, unless you use the `-N` parameter.

You cannot use the `-E` and `-g` flags together.

`-f <formatfile>`

specifies the full path name of a file with stored responses from a previous use of `bcpl` on the same table. After you answer `bcpl`'s format questions, it prompts you to save your answers in a format file. Creation of the format file is optional. The default file name is `bcpl.fmt`. The interactive `bcpl` program can refer to a format file when you are copying data so that you do not have to duplicate your previous format responses. Use the `-f` parameter only if you previously created a format file that you now want to use for a copy in or copy out operation. If you do not specify this parameter, `bcpl` interactively queries you for format information.

`-F <firstrow>`

specifies the number of the first row to copy (default is the first row). If you use multiple files, this option applies to each file.

Do not use `-F` when performing heavy-duty, multiprocess copying, as doing so causes `bcp` to generally spend more effort to run, and does not provide you with a faster process. Instead, use `-F` for single-process, ad hoc copying.

i Note

You cannot use `-F` with `--skiprows`.

`-g <id_start_value>`

specifies the value of the `IDENTITY` column to use as a starting point for copying data in.

i Note

You cannot use the `-g` and `-E` flags together.

`-i <input_file>`

specifies the name of the input file. Standard input (`stdin`) is used as the default.

`-H <hostname>`

sets the client host name.

`-I <interfaces_file>`

specifies the name and location of the interfaces file to search when connecting to the SAP ASE server. If you do not specify `-I`, `bcp` looks for an interfaces file (`sql.ini` in Windows) in the SYBASE release directory.

`-J <client_charset>`

specifies the character set to use on the client. `bcp` uses a filter to convert input between `<client_charset>` and the SAP ASE character set.

`-J <client_charset>` requests that the SAP ASE server convert to and from `<client_charset>`, the character set used on the client.

`-J` with no argument disables character set conversion. No conversion takes place. Use this if the client and server use the same character set.

Omitting `-J` sets the character set to a default for the platform, which may not necessarily be the character set that the client is using. For more information about character sets and associated flags, see the *Adaptive Server Enterprise System Administration Guide*.

`-K <keytab_file>`

(Used only with Kerberos security) Specifies a Kerberos keytab file that contains the security key for the user name specified with the `-U` option. To create a keytab, see your Kerberos documentation.

If you do not supply the `-K` option, the `bcp` user must be logged in to Kerberos with the same user name as specified with the `-U` option.

`-k <secure_store_key>`

specifies the secure store key that contains the client's credentials and server connection information, such as username, password, hostname, and port number of the server. Instead of entering the username and password, you need to provide the key to connect to the SAP ASE server.

-L <lastrow>

specifies the number of the last row to copy from an input file (default is the last row). If you use multiple files, this option applies to each file.

-labeled

(secure SAP ASE only) indicates that the data you are importing already has labels in the first field of every record.

For exporting data, this option indicates that you want the sensitivity label of every row to be copied out as the first field.

-m <maxerrors>

specifies the maximum number of errors permitted before `bcp` aborts the copy. `bcp` discards each row that it cannot insert (due to a data conversion error, or an attempt to insert a null value into a column that does not allow them), counting each rejected row as one error. If you do not include this option, `bcp` uses a default value of 10.

If you use multiple partitions, the same number of `<maxerrors>` is used for every file.

-M <LabelName> <LabelValue>

(secure SAP ASE only) enables multilevel users to set the session labels for the bulk copy. Values for `<LabelName>` are:

- `curread` (current reading level) – is the initial level of data that you can read during this session, `curread` must dominate `curwrite`.
- `curwrite` (current write level) – is the initial sensitivity level that is applied to any data that you write during this session.
- `maxread` (maximum read level) – is the maximum level at which you can read data. This is the upper bound to which you as a multilevel user can set your `curread` during the session. `maxread` must dominate `maxwrite`.
- `maxwrite` (maximum write level) – is the maximum level at which you can write data. This is the upper bound to which you as a multilevel user can set your `curwrite` during a session. `maxwrite` must dominate `minwrite` and `curwrite`.
- `minwrite` (minimum write level) – is the minimum level at which you can write data. This is the lower bound to which you as a multilevel user can set `curwrite` during a session. `minwrite` must be dominated by `maxwrite` and `curwrite`.

`<LabelValue>` is the actual value of the label, expressed in the human-readable format used on your system (for example, "Company Confidential Personnel").

-n

performs the copy operation using native (operating system) formats. Specifying the `-n` parameter means `bcp` does not prompt for each field. Files in native data format are not human-readable.

⚠ Caution

Do not use:

- `bcp` in native format for data recovery or salvage or to resolve an emergency situation.
- `bcp` in native format to transport data between different hardware platforms, different operating systems, or different major releases of SAP ASE.

- Field terminators (-t) or row terminators (-r) with bcp in native format.

Results are unpredictable and data may become corrupted.

Using bcp in native format can create flat files that cannot be reloaded into the SAP ASE server and it may be impossible to recover the data. If you cannot re-run bcp in character format (for example, a table was truncated or dropped, hardware damage occurred, a database was dropped, and so on) the data is unrecoverable.

-N

skips the IDENTITY column. Use this option when copying data in if your host data file does not include a placeholder for the IDENTITY column values, or when copying data out, if you do not want to include the IDENTITY column information in the host file.

You cannot use both -N and -E parameters when copying data in.

-o <output_file>

specifies the name of the output file. Standard output (stdout) is used as the default.

-P <password>

specifies an SAP ASE password. If you do not specify -P, bcp prompts for a password. Omit the -P flag if your password is NULL.

-Q

provides backward compatibility with bcp for copying operations involving nullable columns.

-r <row_terminator>

specifies the row terminator.

⚠ Caution

Do not use -t or -r parameters with bcp in native format. Results are unpredictable and data may become corrupted.

When specifying terminators from the command line with the -t or -r parameter, you must escape characters that have special significance to the UNIX operating system (or the command prompt shell for Windows). See the examples for bcp for more information. Either place a backslash in front of the special character or enclose it in quotes. This is not necessary when bcp prompts you (interactive mode).

-R <remote_server_principal>

specifies the principal name for the server. By default, a server's principal name matches the server's network name (which is specified with the -s option or the DSQUERY environment variable). Use the -R option when the server's principal name and network name are not the same.

-S <server>

specifies the name of the SAP ASE server to connect to. If you specify -s with no argument, bcp uses the server specified by the DSQUERY environment variable.

-t <field_terminator>

specifies the default field terminator.

-T <text_or_image_size>

allows you to specify, in bytes, the maximum length of `text` or `image` data that the SAP ASE server sends. The default is 32K. If a `text` or an `image` field is larger than the value of `-T` or the default, `bcp` does not send the overflow.

-U <username>

specifies an SAP ASE login name. If you do not specify this option, `bcp` uses the current user's operating system login name.

-v

displays the version number of `bcp` and a copyright message and returns to the operating system.

SDK binaries like `bcp` have the same names in both the 32-bit and 64-bit products. Installing SAP ASE, the SDK, or Open Server 64-bit products with other 32-bit products overwrites the 32-bit binaries. Starting with SAP ASE 15.0.2 and ASE SDK/SAP Open Server 15.0 ESD #9, the 64-bit binaries have been replaced with 32-bit binaries on all 64-bit UNIX platforms. Since 32-bit binaries are included in the 64-bit EBF, the `-v` option of `bcp` is no longer a valid way to check the EBF number for 64-bit products. Instead, use the UNIX strings and `grep` commands to confirm the EBF numbers for SAP ASE.

For example, to find the string containing the EBF number in the `libsybct64.a` library, enter:

```
strings -a libsybct64.a | grep Sybase
```

This returns a string similar to:

```
Sybase Client-Library/15.5/P/DRV.15.5.0/SPARC/Solaris  
8/BUILD1550-001/64bit/OPT/Mon Aug 10 23:04:17 2009
```

To find the string containing the EBF number in the `libsybsrv64.a` library, enter:

```
strings -a libsybsrv64.a | grep Sybase
```

This returns a string similar to:

```
Sybase Server-Library/15.5/P/DRV.15.5.0/SPARC/Solaris  
8/BUILD1550-001/64bit/OPT/Mon Aug 10 23:06:27 2009
```

-v <security_options>

specifies network-based user authentication. With this option, the user must log in to the network's security system before running the utility. Users must supply their network user name with the `-U` option; any password supplied with the `-P` option is ignored.

To enable additional security services, follow `-v` with a `<security_options>` string of key-letter options:

- `c` – enables data confidentiality service.
- `i` – enables data integrity service.
- `m` – enables mutual authentication for connection establishment.
- `o` – enables data origin stamping service.

- `r` – enables data replay detection.
- `q` – enables out-of-sequence detection.

-W

specifies that if the server to which `bcp` is attempting to connect supports neither normal password encryption nor extended password encryption, plain text password retries are disabled.

If you use this option, the `CS_SEC_NON_ENCRYPTION_RETRY` connection property is set to `CS_FALSE`, and plain text (unencrypted) passwords are used, the connection is not retried.

-x <trusted.txt_file>

specifies an alternate `<trusted.txt>` file.

-X

specifies that, in this connection to the server, the application initiates the login with client-side password encryption. `bcp` (the client) specifies to the server that password encryption is desired. The server sends back an encryption key, which `bcp` uses to encrypt your password, and the server uses the key to authenticate your password when it arrives.

This option results in normal or extended password encryption, depending on connection property settings at the server. If `CS_SEC_ENCRYPTION` is set to `CS_TRUE`, normal password encryption is used. If `CS_SEC_EXTENDED_ENCRYPTION` is set to `CS_TRUE`, extended password encryption is used. If both `CS_SEC_ENCRYPTION` and `CS_SEC_EXTENDED_ENCRYPTION` are set to `CS_TRUE`, extended password encryption is used as the first preference.

If `bcp` fails, the system creates a core file that contains your password. If you did not use the encryption option, the password appears in plain text in the file. If you used the encryption option, your password is not readable.

-y <alternate_home_directory>

sets an alternate Sybase home directory.

-Y

specifies that character-set conversion is disabled in the server, and is instead performed by `bcp` on the client side when using `bcp out`.

i Note

A client-side Unicode conversion is supported only for SAP ASE 15.0 and later.

During `bcp out`, all character-set conversion is done in the server.

-z <language>

is the official name of an alternate language the server uses to display `bcp` prompts and messages. Without the `-z` flag, `bcp` uses the server's default language.

Add languages to an SAP ASE server during installation or afterwards, using either the `langinstall` utility (`langinst` in Windows) or the `sp_addlanguage` system procedure.

If an incorrect or unrecognized language is named with the `-z` parameter, you see this error message:

```
Unrecognized localization object. Using default value
'us_english'.
Starting copy...
=> warning.
```

-Z <security_mechanism>

specifies the name of a security mechanism to use on the connection.

Security mechanism names are defined in the `$$SYBASE/install/libtcl.cfg` configuration file. The default mechanism is used if you do not supply `<security_mechanism>` name.

--colpasswd [[<database_name> [<owner>].]<table_name>.<column_name> [<password>]]

sets the passwords for encrypted columns by sending `set encryption passwd <password>` for column `<column_name>` to the SAP ASE server. This does not automatically apply passwords to other encrypted columns, even if the second column is encrypted with the same key. Supply the password a second time to access the second column.

This option is automatically encrypted.

--hide-vcc

instructs `bcp` not to copy virtual computed columns (VCC) either to or from a data file. When you use this option in `bcp out`, the data file contains no data for VCC. When you use it in `bcp in`, the data file may contain no data for a VCC.

If you use this option, the SAP ASE server does not calculate or send virtual computed column data.

--initstring "<Transact-SQL_command>"

sends Transact-SQL commands to the SAP ASE server before data is transferred.

Result sets issued by the initialization string are silently ignored, unless an error occurs. If the SAP ASE server returns an error, `bcp` stops before data is transferred, and displays an error message.

This option is automatically encrypted.

--keypasswd [[<database_name> [<owner>].]<key_name> [<password>]]

sets passwords for all columns accessed by a key by sending `set encryption passwd <password>` for key `<key_name>` to the SAP ASE server.

This option is automatically encrypted.

--maxconn <maximum_connections>

is the maximum number of parallel connections permitted for each bulk copy operation. You must use `bcp_r`, the threaded version of the `bcp` utility, to copy multiple files in parallel. For example, the following example sets the maximum number of parallel connection permitted for each operation to 2:

```
bcp_r --maxconn 2
```


If you do not include this option, `bcp` uses the default value of 10.

--show-fi

instructs `bcp` to copy functional indexes, while using either `bcp in` or `bcp out`. If you do not specify this option, the SAP ASE server generates the value for the functional index.

--skiprows <nSkipRows>

instructs `bcp` to skip a specified number of rows before starting to copy from an input file. The valid range for `--skiprows` is between 0 and the actual number of rows in the input file. If you provide an invalid value, you see an error message.

i Note

You cannot use `--skiprows` with the `-F` option.

Examples

Character datatype (-c)

The `-c` option copies data out of the `publishers` table in character format (using `char` for all fields). The `-t <field_terminator>` option ends each field with a comma, and the `-r <row_terminator>` option ends each line with a Return. `bcp` prompts only for a password. The first backslash before the final "r" escapes the second so that only one backslash prints.

In UNIX:

```
bcp pubs2..publishers out pub_out -c -t , -r \\r
```

In Windows:

```
bcp pubs2..publishers out pub_out -c -t , -r \r
```

Connecting to the SAP ASE Server using secure store key

In the following example, the user-generated key, `<userkey>`, which stores the user's credentials, is provided with `bcp` to connect to the SAP ASE Server.

```
bcp -k <userkey>
```

Encrypted columns (-C)

The `-c` parameter copies data out of the `publishers` table (with encrypted columns) in cipher-text format instead of plain text. Press Return to accept the defaults specified by the prompts. The same prompts appear when copying data into the `publishers` table:

```
bcp pubs2..publishers out pub_out -C
Password:
Enter the file storage type of field pub_id [char]:
Enter prefix length of field pub_id [0]:
Enter length of field pub_id [4]:
Enter field terminator [none]:
Enter the file storage type of field pub_name [char]:
Enter prefix length of field pub_name [1]:
Enter length of field pub_name [40]:
```

```
Enter field terminator [none]:
Enter the file storage type of field city [char]:
Enter prefix length of field city [1]:
Enter length of field city [20]:
Enter field terminator [none]:
Enter the file storage type of field state [char]:
Enter prefix length of field state [1]:
Enter length of field state [2]:
Enter field terminator [none]:
```

In UNIX, you are then asked:

```
Do you want to save this format information in a
  file? [Y-n] y
Host filename [bcp.fmt]: pub_form
Starting copy...
3 rows copied.
Clock Time (ms.): total = 1 Avg = 0 (3000.00 rows per sec.)
```

Copy out to a file

Copies data from the publishers table to a file named `pub_out` for later reloading into the SAP ASE server. Press Return to accept the defaults that the prompts specify. The same prompts appear when copying data into the publishers table:

```
bcp pubs2..publishers out pub_out
Password
Enter the file storage type of field pub_id [char]:
Enter prefix length of field pub_id [0]:
Enter length of field pub_id [4]:
Enter field terminator [none]:
Enter the file storage type of field pub_name [char]:
Enter prefix length of field pub_name [1]:
Enter length of field pub_name [40]:
Enter field terminator [none]:
Enter the file storage type of field city [char]:
Enter prefix length of field city [1]:
Enter length of field city [20]:
Enter field terminator [none]
Enter the file storage type of field state [char]:
Enter prefix length of field state [1]:
Enter length of field state [2]:
Enter field terminator [none]:
```

You are then asked:

```
Do you want to save this format information in a
  file? [Y-n]
Host filename [bcp.fmt]: pub_form
Starting copy...
3 rows copied.
Clock time (ms.): total = 1 Avg = 0 (3000.00 rows per
sec.)
```

Copy in

Copies data back into the SAP ASE server using the saved format file, `pub_form`:

```
bcp pubs2..publishers in pub_out -f pub_form
```

Client character set (-J)

Copies a data file created with the `iso_1` character set into the `pubs2..publishers` table. The `-z` flag displays `bcp` messages in French:

```
bcp pubs2..publishers in datafile -J iso_1 -z french
```

Partitions

Copies data out of partition `p1` of table `t1` to the `mypart.dat` file in the current directory:

```
bcp t1 partition p1 out mypart.dat
```

To copy in:

```
bcp t1 partition p1 in mypart.dat
```

To copy files `data.first`, `data.last` and `data.other` into partitions `p1`, `p2`, and `p3`, respectively:

```
bcp t1 partition p1, p2, p3 in data.first, data.last,  
data.other
```

To copy partition `p1`, `p2`, and `p3` to files `a`, `b`, and `c` respectively, into the `\work2\data` directory:

```
bcp t1 partition p1, p2, p3 out \work2\data\1,  
\work2\data\b, \work2\data\c
```

Setting limits (--initstring)

Limits this to the current session, disabling replication for the `bcp` connection during the transfer of data from `titles.txt` data into `pubs2..titles`.

```
bcp pubs2..titles in titles.txt --initstring 'set replication off'
```

You need not explicitly reset the configuration option after `bcp` is finished. If the SAP ASE server returns an error, `bcp` stops the data transfer and displays an error message.

Password (-P)

Sets the password to `pwd1` for the encrypted column `col1`:

```
bcp mydb..mytable out myfile -U uuu -P ppp --colpasswd  
db..tbl.col1 pwd1
```

Password prompts

Sets a prompt to enter the password for encrypted column `col1`:

```
bcp mydb..mytable out myfile -U uuu -P ppp --colpasswd  
db..tbl.col1  
Enter column db..tbl.col1's password: ***?
```

External file password

Reads the password for encrypted column `col1` from an external OS file named "passwordfile":

```
bcp mydb..mytable out myfile -U uuu -P ppp --colpasswd  
db..tbl.col1 < passwordfile
```

Encrypted key password

Sets password `pwd1` for encryption key `key1`:

```
bcp mydb..mytable in myfile -U uuu -p ppp --keypasswd
db..key1 pwd1
```

Discard file (-d)

Creates the discard file `reject_titlesfile.txt`:

```
bcp pubs2..titles in titlesfile.txt -d reject_
```

Security (-V)

For MIT Kerberos, requests credential delegation and forwards the client credentials to `MY_GATEWAY`:

```
bcp -Vd -SMY_GATEWAY
```

Skip rows (--skiprows)

`bcp` ignores the first two rows of the input file `titles.txt`, and starts to copy from the third row:

```
bcp pubs2..titles in titles.txt -U username -P password
--skiprows 2
```

Alternate directories (-y)

Sets an alternate Sybase home directory:

```
bcp tempdb..T1 out T1.out -y/work/NewSybase -User1
-Psecret -SMYSERVER
```

Text and image sizes (-T)

Specifies that the SAP ASE server send 40K of `text` or `image` data using a packet size of 4096 bytes:

```
bcp pubs2..publishers out -T 40960 -A 4096
```

Maximum number of connections (--maxconn)

Sets 2 as the maximum number of parallel connections permitted for each operation.

```
bcp_r --maxconn 2
```

Materialized computed columns

Copies out database `db_1`, which includes table `t1` with materialized computed column `c1`:

```
bcp db_1..t1 out db_1.dat -Usa -P -S big_db -I./interfaces -f ./bcp.fmt
```

The following then copies in the data file (`db_1.dat`) containing table `t1` with materialized computed column `c1`:

```
bcp db_1..t1 in db_1.dat -Usa -P -S big_db -I./interfaces -f ./bcp.fmt
```

Fast logging

Enables fast-logged `bcp` when you transfer the `titles.txt` data into the `pubs2..titles` table:

```
bcp pubs2..titles in titles.txt --initstring 'set logbulkcopy on'
```

SQLScript-enabled databases

Copies the `titles` table, which is part of the `schema1` schema, out of the SQLScript-enabled `pubs2_sql` database into a file named `pub_out`:

```
bcp pubs2_sql.schema1.titles out pub_out -Ujoe -Pjoe123 -Sbigserver -I$SYBASE/
interfaces -c
```

Permissions

You must have an SAP ASE account and the appropriate permissions on the database tables or views, as well as the operating system files to use in the transfer to use `bcp`.

- To copy data into a table, you must have `insert` permission on the table.
- To copy a table to an operating system file, you must have `select` permission on these tables:
 - The table to copy
 - `sysobjects`
 - `syscolumns`
 - `sysindexes`

Auditing

Values in `event` and `extrainfo` columns are:

Audit option	Event	Command or access audited	Information in <code>extrainfo</code>
<code>bcp</code>	4	<code>bcp in</code>	<ul style="list-style-type: none">• <i>Roles</i> – Current active roles• <i>Keywords or options</i> – NULL• <i>Previous value</i> – NULL• <i>Current value</i> – NULL• <i>Other information</i> – NULL• <i>Proxy information</i> – Original login name, if <code>set proxy</code> in effect

For more information about auditing, see *Security Administration Guide > Auditing*.

Tables used

`sysaudits_01` – `sysaudits_08`

Related Information

[Transfer Data to and from SAP ASE Using bcp \[page 204\]](#)

[Bulk Copying Encrypted Data \[page 221\]](#)

[Threaded Versions of Utilities \[page 9\]](#)

[Database Creation and Manipulation Utilities \[page 11\]](#)

2.4.1 Usage for bcp

There are a number of considerations when using `bcp`.

- `bcp_r` is a threaded version of `bcp`.
- You can use named pipes to copy files in or out on UNIX platforms.

i Note

The use of UNIX/Linux named pipes is not supported when bulk copying text, image, or off-row stored columns (such as Java classes) from a named pipe (FIFO) into an database table when using a `bcp` format file with a nonzero prefix length for such columns, and the data size of the columns being copied is greater than the `text_or_image_size` specified by the `bcp_t` command flag.

The value of `text_or_image_size` indicates the maximum data size that is copied by `bcp` for such columns. The default value is 32KB.

This restriction applies because `bcp` internally calls the `lseek()` system function to skip over the part of the input field exceeding the maximum size handled by `bcp`. The `lseek()` system function does not work correctly when attempted on UNIX/Linux named pipes (FIFOs). The data is not copied correctly and the following error message is displayed:

```
Text/image field is larger than the maximum value. Data truncated.  
LSEEK: Illegal seek  
I/O error while reading the bcp input-file.
```

- Using `--hide-vcc` improves performance because the SAP ASE server does not transfer and calculate data from virtual computed columns.
- Although you can use any Transact-SQL command with `--initstring` as an initialization string for `bcp`, reset possible permanent changes to the server configuration after running `bcp`. You can, for example, reset changes in a separate `isql` session.
- `<slice_number>` is included for backward compatibility with SAP ASE 12.5.x and earlier, and can be used only with round-robin partitioned tables.
- Specify either `<partition_id>` or `<partition_name>`, but not both.
- If you provide no partition name, `bcp` copies to the entire table.
- You can specify multiple partitions and data files. Separate each partition name or data file with commas.
- `bcp` provides a convenient and high-speed method for transferring data between a database table or view and an operating system file. `bcp` can read or write files in a wide variety of formats. When copying in from a file, `bcp` inserts data into an existing database table; when copying out to a file, `bcp` overwrites any previous contents of the file.

- Upon completion, `bcpl` informs you of the number of rows of data successfully copied, the total time the copy took, the average amount of time in milliseconds that it took to copy one row, and the number of rows copied per second.
- `bcpl` does not insert any row that contains an entry exceeding the character length of the corresponding target table column. For example, `bcpl` does not insert a row with a field of 300 bytes into a table with a character-column length of 256 bytes. Instead, `bcpl` reports a conversion error and skips the row. `bcpl` does not insert truncated data into the table. The conversion error is as follows:

```
cs_convert: cslib user api layer: common library
error: The result is truncated because the
conversion/operation resulted in overflow
```

To keep track of data that violates length requirements, run `bcpl` with the `-e log-file` name option. `bcpl` records the row and the column number of the rejected data, the error message, and the data in the log file you specify.

To restrict the functionality of `bcpl` to that of a previous version, set the `CS_BEHAVIOR` property in the `[bcpl]` section of the `ocs.cfg` file:

```
[bcpl]
CS_BEHAVIOR = CS_BEHAVIOR_100
```

If `CS_BEHAVIOR` is not set to `CS_BEHAVIOR_100`, you can use functionality for `bcpl` 11.1 and later.

- If `bcpl` is invoked and no value is supplied for the `-c`, `-f`, or `-n` parameters, a `bcpl` prompt requests the file storage type. The file storage type can be any valid SAP ASE datatype. Storage types for the `bigdatetime` and `bigtime` SAP ASE datatypes are specified as:

Storage Type	Table Datatype
A	<code>bigdatetime</code>
B	<code>bigtime</code>

- You can specify these datatypes for a `bcpl` format file using the `bigdatetime` or `bigtime` datatypes:

Storage Format	SAP ASE Datatype
<code>SYBBIGDATETIME</code>	<code>bigdatetime</code>
<code>SYBBIGTIME</code>	<code>bigtime</code>

- Use `bcpl` to copy encrypted data in and out of the server.
- `bcpl` versions 15.7 and later allow you to copy data into tables that contain nonmaterialized columns.
- Error message format is different than in versions of `bcpl` earlier than 15.7. If you have scripts that perform routines based on the values of these messages you may need to rewrite them, for example:

```
The display message that indicates the number of rows
transferred has been changed. During a session, this
version of bcpl periodically reports a running total
of rows transferred. This message replaces the "1000
rows transferred" message displayed by the previous
bcpl.
```

- When using `bcpl out`:

- If `<partition_name>` and `<datafile>` are both specified, then either `<datafile>` must specify a single data file, or specify a one-to-one mapping between partition names and data files.
- If `<datafile>` is not specified, data from each partition is copied to a file named for the named partition with a `.dat` extension. For example, if the partition name is `ptn1`, the data file is `ptn1.dat`.
- You may use `initstring` to run any Transact-SQL command, but you must reset any permanent changes to the server `initstring` causes after `bcp` finishes. For instance, as in the example for the password (`-p`) parameter, if the SAP ASE account does not have the appropriate permissions, the SAP ASE server returns an error message for the initialization string. `bcp` displays the server error message and stops before any data is transferred.
Result sets issued by the initialization string are silently ignored unless an error occurs.
- When using `bcp in`, if `<partition_name>` is specified, `<datafile>` must specify a corresponding number of data files
- If you see a message similar to the following, the character translation file specified with the `-q` parameter is missing, or you mistyped the name:
`Error in attempting to load a view of translation tables.`
- SQLScript databases do not support partitions, so you cannot include partition information when you are copying data in and out of SQLScript-enabled databases.

See also:

- *Open Client™ and Open Server™ Configuration Guide* – the description for `libtc1.cfg` for security mechanism names
- *Performance and Tuning Guide* – on how changing certain parameters can affect `bcp` for large batches
- *Reference Manual: Commands* – `insert`
- *Reference Manual: Procedures* – `sp_audit`, `sp_dboption`, `sp_displayaudit`
- *System Administration Guide* – character sets and associated flags

2.4.1.1 Copying Tables with Indexes or Triggers Using bcp

`bcp` is optimized to load data into tables that do not have associated indexes or triggers. It loads data into tables without indexes or triggers at the fastest possible speed, with a minimum of logging. Page allocations are logged, but row insertions are not.

When you copy data into a table that has one or more indexes or triggers, a slower version of `bcp` is automatically used, which logs row inserts. This includes indexes that are implicitly created using the unique integrity constraint of a `create table` command. However, `bcp` does not enforce the other integrity constraints defined for a table.

Since the fast version of `bcp` inserts data without logging it, the system administrator or database owner must first set the `sp_dboption` procedure:

```
sp_dboption <dbname>, "select into/bulkcopy", true
```

If the option is not true and you try to copy data into a table that has no indexes or triggers, the SAP ASE server generates an error message. You need not set this option to copy data out to a file or into a table that contains indexes or triggers.

i Note

Because `bcp` logs inserts into a table that has indexes or triggers, the log can grow very large. You can truncate the log with `dump transaction` to truncate the log after the bulk copy completes, and after you have backed up your database with `dump database`.

While the `select into/bulkcopy` option is on, you cannot dump the transaction log. Issuing `dump transaction` produces an error message instructing you to use `dump database` instead.

⚠ Caution

Ensure that you dump your database before you turn off the `select into/bulkcopy` flag. You cannot recover your data if you have inserted unlogged data into your database and you then perform `dump transaction` before performing `dump database`.

Unlogged `bcp` runs slowly while a `dump database` is taking place.

Table 2: Comparing fast and slow `bcp`

	<code>select into/bulkcopy on</code>	<code>select into/bulkcopy off</code>
Fast <code>bcp</code> – no indexes or triggers on target table	Yes – <code>dump transaction</code> prohibited	No – the SAP ASE server forces slow <code>bcp</code>
Slow <code>bcp</code> – one or more indexes or triggers	Yes – <code>dump transaction</code> prohibited	Yes – <code>dump transaction</code> OK

By default, the `select into/bulkcopy` option is off in newly created databases. To change the default, turn the option on in the `model` database.

i Note

The performance penalty for copying data into a table that has indexes or triggers can be severe. If you are copying in a large number of rows, it may be faster to:

1. Use `drop index` (or `alter table` for indexes) and `drop trigger` to drop all the indexes and triggers
2. Set the database option.
3. Copy the data into the table.
4. Re-create the indexes and triggers.
5. Dump the database.

However, you must allocate extra disk space for the construction of indexes and triggers—about 2.2 times the amount of space needed for the data.

2.4.1.2 Using bcp with Compressed Data

Pages in a compressed table may have a combination of row-, page-, or uncompressed rows. Tables and partitions listed as `not compressed` may contain a mixture of rows in different states of compression because you may have created them when the table's compression level was different.

- `bcp out`:
 - Decompresses compressed rows and returns them to the client, either in native or character form.
 - Supports IDENTITY, encrypted columns, and so on.
 - Returns text data as uncompressed.
- `bcp in` compresses uncompressed data received from the client according to the table or partition's compression level.

Using `bcp` to copy data out and then `bcp` it back in to a table that is configured for compression results in compressed data, even if the data was originally uncompressed.

2.5 buildmaster

SAP ASE does not use the `buildmaster` binary to build the master device. Instead, it has incorporated the `buildmaster` functionality in the `dataserver` binary.

Related Information

[Build Servers Using `dataserver` \[page 249\]](#)

2.6 certauth

This utility is deprecated. To generate a certificate, you can use a third party tool, such as the `openssl` utility, or use the `keytool` and `ExportPrivateKey` utility provided with SAP ASE.

2.7 certpk12

This utility is deprecated. To generate a certificate, you can use a third party tool, such as the `openssl` utility, or use the `keytool` and `ExportPrivateKey` utility provided with SAP ASE.

2.8 certreg

This utility is deprecated. To generate a certificate, you can use a third party tool, such as the `openssl` utility, or use the `keytool` and `ExportPrivateKey` utility provided with SAP ASE.

2.9 charset

(UNIX only) Loads the character sets and sort order files in the SAP ASE server.

The utility is located in `$SYBASE/$SYBASE_ASE/bin`.

Syntax

```
charset
  [-P<password>]
  [-S<server>]
  [-I<interface>]
  <sort_order>
  [ <charset> ]
```

Or

```
charset -v
```

Parameters

-P <password>

specifies your password. If you do not specify `-P`, `charset` prompts for your password.

-S <server>

specifies the name of the server on which to change the character set and sort order.

-I <interface>

specifies the network interface used by the server.

<sort_order>

specifies the name of the sort order file the SAP ASE server will use.

<charset>

specifies the character set the SAP ASE server will use.

-v

displays the version number and copyright message for `charset`.

Usage

Before using `charset`, set your SYBASE environment variable to point to the current release directory.

See also `set` command in *Reference Manual: Commands*.

Permissions

You must be a system administrator to use `charset`.

Related Information

[Utilities for Languages, Character Sets, and Sort Orders \[page 10\]](#)

2.10 cobpre

Precompiler for COBOL.

The utility is located in:

- (UNIX) `$$SYBASE/$SYBASE_OCS/bin`.
- (Windows) `%SYBASE%\%SYBASE_OCS%\bin`.

For a full description of `cobpre`, see the *Open Client and Open Server Programmer's Supplement*.

Related Information

[Threaded Versions of Utilities \[page 9\]](#)

2.11 cpre

Precompiler for C.

The utility is located in:

- (UNIX) `$$SYBASE/$SYBASE_OCS/bin`.
- (Windows) `%SYBASE%\%SYBASE_OCS%\bin`.

For a full description of `cpre`, see the *Open Client and Open Server Programmer's Supplement*.

Related Information

[Threaded Versions of Utilities \[page 9\]](#)

2.12 dataserver

(UNIX only) The executable form of the SAP ASE program, located in `$SYBASE/$SYBASE_ASE/bin`.

Syntax

```
dataserver [-C] [-f] [-g] [-G] [-h] [-H] [-m] [-O] [-q] [-v] [-X]
  [-A <system_role>]
  [-a <path_to_CAPs_directive_file>]
  [-b <master_device_size> [k | K | m | M | g | G | t | T] ]
  [-c <config_file_for_server>]
  [-d <device_name>]
  [-D <default_db_size>]
  [-e <path_to_error_log>]
  [<ETS_port_number>]
  [-i <interfaces_file_directory>]
  [-k <server_principal_name>]
  [-K <keytab_file>]
  [-L <config_file_name_for_connectivity>]
  [-M <shared_memory_repository_directory>]
  [-N <licinstant>]
  [-n <system_privileges>]
  [-p <sa_login_name>]
  [-r <mirror_disk_name>]
  [-s <server_name>]
  [-T <trace_flag>]
  [-u <sa/sso_name>]
  [-w master | model database]
  [-y [<password>] ]
  [-z <page_size> [ k | K ] ]
  [-Z <initial_master_db_size>]
```

Syntax for the Cluster Edition:

```
dataserver
-u, --admin-name=<sa/sso_name>
  --buildquorum=<force>]
-a, --caps-file=<filename>
-C, --cleartext-temp-db
-F, --cluster-input=<filename>
  --cluster-takeover
-L, --conn-config-file=<filename>
  --create-cluster-id [=quorum]
-D, --default-db-size=<size_spec>
```

```

-e, --error-log=<filename>
--ets-mode-port=<ETS_port_number>
-G, --event-log-server=<logserv_name>
-f, --forcebuild
-H, --ha-server
-h, --help=[{0|1|2|3}[,<display_width>]]
--instance=<instance_name>
-i, --interface-dir=directory_name
-y, --key-password=<key_password>
-K, --keytab-file=<filename>
-N, --license-prop-file=<filename>
-z, --logical-page-size=<page_size>
-Z, --master-db-size=<size_spec>
-d, --master-dev=<master_device_name>
-b, --master-dev-size=<size_spec>
--master_key_password [=<password>]
--master_key_startup_file=<master_key_startup_file>
-r, --master-mirror=<filename>
-m, --masterrecover
-g, --no-event-logging
-n, --permission-login=<system_privilege>
-O, --llvm-compile-server
-Q, --quorum-dev=<quorum_dev>
-q, --recover-quiet
--recover-syncprep-no-connect
--replication-credentials=<replication_credentials>
-w, --rewrite-db=<database_name>
-A, --role-logins=<system_role>
-p, --sa-name={<SSO_login_account> | sso_role | sa_role}
--sbssav
-s, --server-name=<server_name>
-k, --server-principal=<s_principal>
-M, --shared-mem-dir=<directory_name>
--show-master-version
-X, --sybmon
-T, --trace=<trace_flag>
-v, --version
--upgrade-ok

```

Or

```
dataserver -v
```

Parameters

-A <system_role>

when enable granular permissions is set to 0, and all users are unable to log into the SAP ASE server, provides the server administrator with a login account with sso_role.

-a <path_to_CAPs_directive_file>

specifies the path to the CAPs directive file.

-b <master_device_size> [k | K | m | M | g | G | t | T]

specifies the size of the master device or database you want to build. The server calculates the sizes, so you can use “K”, “M”, “G”, and “T” instead of exact byte numbers.

-c <config_file_for_server>

specifies the full path name of an SAP ASE configuration file. Use this parameter to start the SAP ASE server with the configuration values in the specified configuration

file. If you specify a configuration file with the `dataserver -c` parameter, make sure all the parameters in this configuration file are compatible before you boot the server. If some of the configuration parameters are incompatible, the server may not boot. To avoid this, do not specify a configuration file when you build the master device. The build phase uses all default settings when you do not specify a configuration file. For more information, see the *System Administration Guide*.

-C, --cleartext-temp-db

creates a cleartext temporary database when the server starts. On the Windows platform, you must use `--cleartext-temp-db`.

-D <default_db_size>

declares how large the `model` database should be when creating a new installation. This sets the size of the smallest permitted database. Syntax is identical to the `-b <size>` parameter. `-D` is only valid when used in conjunction with `-b`. Default varies by server page size, because the smallest acceptable size is 1024 logical pages: 2 Mb on a 2k page, 4 Mb on an 8k page, and so on. If the flag provides a size smaller than the minimum, the server adjusts it up to the minimum.

-d <device_name>

is the full path name of the device for the `master` database. The master database device must be writable by the user who starts the SAP ASE server. If you do not use the `-d` parameter, the default `master` database device name is `d_master`.

-e <errorlogfile>

is the full path name of the error log file for SAP ASE system-level error messages.

--ets-mode-port=<ETS_port_number>

specifies that the accelerator for SAP ASE service (`etsserver`) is running when the installation of SAP HANA accelerator for SAP ASE completes.

-f

forces initialization of a device or database. `-f` is valid only when used with `-b` and/or `-w`. The server fails to boot if you use `-f` without either `-b` or `-w`. `-f` forces the server in different ways, depending whether `-w` is present.

-G <logserv_name>

specifies the name of the event log server.

-g

turns off event-logging.

-H

-h

prints this help message, then exists.

-i <interfaces_file_directory>

specifies the directory location of the interfaces file to search when connecting SAP ASE. If starts the high availability (HA) server, if you have the HA feature installed on your SAP ASE server. `-I` is omitted, `dataserver` looks for a file named `interfaces` in the directory pointed to by your SYBASE environment variable.

-K <keytab_file>

specifies the path to the keytab file used for authentication in DCE.

-k, --server-principal=<s_principal>

specifies the server principal name.

-L <config_file_name_for_connectivity>

specifies the name the configuration file for connectivity.

-M <sharedmem_directory>

places shared memory files in the specified directory instead of in the default location, \$SYBASE. If <sharedmem_directory> starts with "/", the directory name is assumed to be absolute. Otherwise, the directory name is interpreted relative to \$SYBASE.

--master_key_password [=<password>]

specifies the master key password when you provide the <password> on the command line or prompts for a master key password during SAP ASE startup. The password characters are not displayed, and the password is not validated until later in the SAP ASE startup sequence.

If you include the password on the command line, it is visible until the memory is read and used.

--master-key-startup-file=<master_key_startup_file>

specifies the path to the master key password start up file containing the automatic_startup key copy of the master or dual master key for unattended start-up mode of SAP ASE.

-m

starts the SAP ASE server in single-user mode.

-N <licinstant>

specifies a nondefault directory location for the license cache file. The default location is \$SYBASE/\$SYBASE_ASE/sysam/server_name.properties.

-n <system_privileges>

when enable granular permissions is set to 1, and all users are unable to log into the SAP ASE server, provides the server administrator with a login account with change password privilege.

-O, --llvm-compile-server

starts the LLVM Compile Server.

-p <sso_login_name>

starts the high availability (HA) server, if you have the HA feature installedspecifies the login name of a system security officer when starting the SAP ASE server, for the purposes of getting a new password for that account. SAP ASE generates a random password, displays it, encrypts it, and saves it in master..syslogins as that account's new password.

Because SAP ASE passwords are encrypted, you cannot recover forgotten passwords. If all system security officers lose their passwords, the -p parameter generates a new password for a system security officer account. Start the SAP ASE server with -p, immediately log in to the SAP ASE server with the new random password, and execute alter login to reset your password to a more secure one.

- sbssav**
prints a shortened version of the version string.
- q**
treats quiesced databases as "in recovery."
- recover-syncprep-no-connect**
recover the server if it cannot connect to Replication Server (however, the primary and standby databases may no longer be synchronized). See the *HADR Users Guide* for more information.
- replication-credentials=<replication_credentials>**
specifies the Replication Server startup credentials.
- r <mastermirror>**
starts the mirror of the master device. Use this parameter to start the SAP ASE server if the master device has been damaged.
- s, --server-name <servername>**
specifies the name of the SAP ASE server to start.

If you do not specify an SAP ASE name with the `-s` parameter, and you have not set the `DSLIS` environment variable, `dataserver` uses the default SAP ASE name `SYBASE`. The value of the `DSLIS` environment variable overrides this default value, and the `-s` parameter overrides both the default and the `DSLIS` environment variable.
- T <trace_flag>**
specifies a trace flag number.
- u <sa/sso_name>**
specifies the system administrator or system security officer's name you want to unlock.
- v**
prints the version number and copyright message for `dataserver`, then exits.
- w [master | model]**
specifies whether you want to write a `master` or `model` database.

When you use the `-w` parameter, `dataserver` uses the `ascii-8` character set instead of the `iso_1` character set. If you require the `iso_8` character set for `master`, load a dump of the `master` database or change the character set with `sqlloc` (`sqlloc` requires the `sybsemprocs` database.)
- x**
starts this server as `sybmon`, not `dataserver`.
- y [<password>]**
allows you to assign a password for the encrypted private key, so that the server prompts the user for a password. This password should match the password you used to encrypt the private key when it was created. You cannot use this parameter when you are running the server in the background.

i Note

Although you can set a password with `-y`, for security reasons Sybase strongly discourages you from doing so.

A private key is included with your server's digital certificate. By default, the certificate file located at `/usr/local/sybase/certificates/<servername>.crt`.

The location of the certificate file changes if you invoke the `sp_ssladmin addcert` command.

`-z [<initial_master_db_size>]`

declares how large the `master` database should be when creating a new installation, setting the size of the smallest permitted database. Syntax is identical to the `-b <size>` parameter. `-D` is only valid when used in conjunction with `-b`. Default varies by server page size, because the smallest acceptable size is 3072 logical pages: 6MB on a 2K page, 12MB on an 8K page, and so on. If the flag provides a size smaller than the minimum, the server adjusts it up to the minimum.

`-z <page_size> [k | K]`

specifies the page size of the server. Use `-b` and `-w` to use this flag, and name an even power of two between 2K and 16K, or else the server does not boot.

`--upgrade-ok`

grants permission for the upgrade that is triggered when you use a new version of `dataserver` to start the existing version of the server with the `prevent automatic upgrade` configuration parameter enabled (set to 1).

Examples

Create new installation

Creates a new installation with a 100MB master device and a 4K page:

```
dataserver -d my_master_device -z 4k -b 100.02M
```

The spaces between options and their following arguments are optional and acceptable. This example specifies "100.02M" for a 100MB master device because the server requires 16K of overhead for its configuration area.

Rewrite database

Rewrites a corrupt `model` database:

```
dataserver -d d_master -w model -s server_name
```

Rewrite database with device size

Rewrites a corrupt `master` database, specifying device size:

```
dataserver -d my_master_device -w master -z 4k
```

Rewrite database with device and page sizes

Rewrites a corrupt `master` database, specifying device and page sizes, forcing the server to accept these values in preference to what it may find in the config block:

```
dataserver -d my_master_device -w master -z 4k -b
100.02M -f
```

Rewrite database with nonmatching page size (generates error)

Rewrites a corrupt `master` database, specifying a page size that does not match what the server finds in its config block. This produces a failure:

```
dataserver -d my_master_device -w master -z 8k
00:00000:00000:2001/01/19 12:01:26.94 server The
configured server page size does not match that
specified on the command line. To use the configured
size, omit the command line size; to use the command
line size, specify 'force' (-f).
```

Rewrite database with incorrect page size (generates error)

Rewrites a corrupt `master` database, specifying an incorrect page size, even in a normal restart. This produces a failure:

```
dataserver -d my_master_device -z4000
dataserver: the 'z' flag may not be used without 'b' or
'w'. dataserver: server will ignore the 'z' flag.
dataserver: the 'z' flag contained an invalid page size.
dataserver: the page size must be an even power of two
between 2048 and 16384 bytes, inclusive.
```

Specify principal name

Specifies the “`aseprincipal@myrealm.com`” principal name:

```
$$SYBASE/$SYBASE_ASE/bin/dataserver -dmaster.dat
-s secure_ase -k aseprincipal@myrealm.com
```

Prompt for password

Prompts for a master key password:

```
dataserver --master_key_passwd -dd_master -eerrorlog
```

List with role

List account names with role `sso_role`:

```
$$SYBASE/$SYBASE_ASE/bin/dataserver
-d master.dat
-s server_name
-A sso_role
```

(Cluster Edition) To list account names with role login for `sso_role`:

```
$$SYBASE/$SYBASE_ASE/bin/dataserver
-d master.dat
-s server_name
--role-logins sso_role
```

List with change password privilege

List account names with privilege `change password`:

```
$SYBASE/$SYBASE_ASE/bin/dataserver  
-d master.dat  
-s server_name  
-n "change password"
```

(Cluster Edition) To list account names with permission logins `change password`:

```
$SYBASE/$SYBASE_ASE/bin/dataserver  
-d master.dat  
-s server_name  
--permission-logins "change password"
```

Permissions

Anyone with execute permission on the binary, and who has read/write access to all the files.

After you have finished running the SAP ASE installation program, set the file permissions on the `dataserver` executable to limit who can execute it.

Related Information

[Dependencies and Conditions of `dataserver -b` and `-w` Options \[page 61\]](#)

[Potential Issues of Using `dataserver -f` and `-w` Options Together \[page 62\]](#)

[Build Servers Using `dataserver` \[page 249\]](#)

[`startserver` \[page 170\]](#)

[Installation or Configuration Utilities \[page 9\]](#)

[Installation or Configuration Utilities \[page 9\]](#)

[Utilities to Start Servers \[page 11\]](#)

2.12.1 Usage for `dataserver`

There are additional considerations when using `dataserver`.

- `dataserver` allows you to create devices and databases that are up to 32GB in size, depending on the limitation of your operating system. For more information on size limits, see the installation guide for your platform.
- Start the SAP ASE server with the `startserver` command rather than by directly executing the `dataserver` program. If you need to change any of the default values, edit the `RUN_servername` file in your Sybase installation directory.
- Automatic login lockouts can cause a site to end up in a situation in which all accounts capable of unlocking logins (system administrators and system security officers) are locked. If this occurs, use the

`dataserver` utility with the `-u` parameter to check the specified login for system administrator or system security officer authorization, unlock the account, and reset the value of the current failed logins counter to zero.

See also:

- *Reference Manual: Commands* – `disk mirror`, `disk remirror`, `disk unmirror`
- *Reference Manual: Procedures* – `sp_ssladmin`, `addcert`

Related Information

[startserver](#) [page 170]

2.12.1.1 Dependencies and Conditions of `dataserver -b` and `-w` Options

The effect of `-b` changes depending on whether `-w` is present.

- `-b` without `-w` creates a new master device as named by `-d` (the default is `d_master`) and with the page size as specified by `-z` (the default is 2048). If the named device:
 - Already exists as an OS file – the attempt fails, and you see a message such as:

```
File already exists. You must remove the existing
file before attempting to create a new one using
the server's -b option.
Unable to create master device.
```
 - Names an existing raw partition – the attempt fails unless you include the `-f` flag. This reinitializes the raw partition as a server master device.
- `-b` with `-w master` tells `dataserver` to use the size specified in `-z` for the master device when re-creating the `master` database. It implies nothing about creating a new device.

`-w` may or may not require additional flags if you use:

- `-w model` – the `-z` and `-b` flags are accepted but ignored.
- `-w master` for **new** installations – `-z` and `-b` are not required because the device size information is stored in the `config_block`.
- `-w master` to **upgrade** older installations:
 - The server requires `-b` and/or `-z` if the `config_block` does not contain a valid entry for the associated size(s). The command fails if it cannot get valid data for the page size or device size.
 - Provide `-b` and/or `-z` when the `config_block` contains valid entries for the sizes they represent. However if the sizes do not match what is in the `config_block`, add `-f` to force your new size preferences.

2.12.1.2 Potential Issues of Using `dataserver -f` and `-w` Options Together

Be particularly careful when using the `-f` and `-w` options together.

When rewriting `master` database using the `-w` option, the server requires that the configuration block page size and device size are correct. If you do not provide them on the command line they must agree. The server refits the master device, and puts master and all other included databases back in their proper places.

When you use the `-f` option to force initialization, your page size and master device size override those in the configuration block. In addition, `-f` assigns all other unknown spaces—allocation blocks that are either unused or are corrupted—to the `master` database.

2.13 `ddlgen`

A Java-based tool that generates definitions for server- and database-level objects in an SAP ASE server.

The command-line version of `ddlgen` is located in:

- (UNIX) `$$SYBASE/$SYBASE_ASE/bin`.
- (Windows) `%SYBASE%\%SYBASE_ASE%\bin`.

Syntax

```
ddlgen
-U<login>
-P<password>
-S[[ssl:]<server> | <host_name >: <port_number>]
[-I <interfaces_file>]
[-T<object_type>]
[-N<object_name>]
[-D<dbname>]
[-C<property_name>=<property_value>]
[-X<extended_object_type>]
[-O<output_file>]
[-E<error_file>]
[-L<progress_log_file>]
[-J<client_charset>]
[-LC -N <logical_cluster_name>]
-F[ % | SGM | GRP | USR | R | D | EK | LK | UDD | U | V |
    P | XP | I | RI | KC | TR | PC | F ]
```

Or

```
ddlgen -v
```

Parameters

-U <login>

specifies a login name, and is case-sensitive.

-P <password>

specifies your password. If you do not include the `-P` parameter in your `ddlgen` statement, `ddlgen` prompts you to specify a password. Also see [Using Passwords with Special Characters \[page 84\]](#) and [Hiding with Passwords in ddlgen \[page 83\]](#).

-S [[ssl:]<server> | <host_name>:<port_number>]

specifies the name of the SAP ASE server. `ddlgen` looks this name up in the interfaces file or LDAP configuration file. If you specify:

[ssl:] (Optional) Allows you to generate DDL for objects in SSL-enabled servers.

-S [<host_name>:<port_number>] `ddlgen` uses the `<host_name>` and `<port_number>` provided, and neither interfaces nor LDAP configuration files are read or parsed.

-S [<server>] -I `ddlgen` parses the interfaces file specified at the user location for the server name (see the `-I` parameter description).

-S [<server>] Without specifying an interfaces file, `ddlgen` does:

1. `ddlgen` first tries to read the LDAP configuration file from the standard location
2. If the LDAP file does not exist, or exists but does not contain an SAP ASE entry, then the interfaces file is parsed at its standard location for the server name
3. If the LDAP file exists, then `ddlgen` uses it to search the server name. The interfaces file is not parsed, and the LDAP configuration file is parsed.

i Note

You must use the `-s` option because `ddlgen` does not connect to a default server.

-I

specifies the interfaces file name, and corresponds to `$SYBASE/interfaces` for UNIX, and `%SYBASE%\ini\sql.ini` for Windows. Use this optional parameter with `-s`.

-T<object_type>

specifies the type of object you are creating. If you do not use `-T`, `ddlgen` generates DDL for the default database of login. The object types for `-T` are:

- C – cache
- D – default
- DB – database
- DBD – database device
- DPD – dump device
- EC – execution class
- EG – engine group
- EK – encrypted keys
- GRP – group
- F – function
- I – index
- IT – instead of trigger for views
- KC – key constraints
- L – login
- LDP – load profile
- LK – logical key
- P – stored procedure
- PN – partition name
- R – rule
- RI – referential integrity
- RO – role
- RS – remote server
- SGM – segment
- TDBG – temporary database group
- TP – thread pool
- TR – trigger
- U – table
- UDD – user-defined datatype
- UDM user-defined message
- USR – user
- V – view
- WS – user-defined Web service
- WSC – Web service consumer
- XOD – local caches
- XOÜ – global caches
- XP – extended stored procedure

i Note

You can only create one type of object at a time.

`-N<object_name>`

specifies the fully qualified name of the object you are creating, such as `-N<db_name>.<owner_name>.<table_name>.<object_name>`. The `-N` option:

- Is required if you specify any `<object_type>` other than `DB` (database) in the `-T` parameter.
- Accepts wildcards with the use of `%`.
- Generates DDL for a trigger for a table, using the `-N<db_name>.<table_owner>.<table_name>.<trigger_name>` format. To generate **all** triggers for a table, substitute `<trigger_name>` with `%` using the `-N<db_name>.<table_owner>.<table_name>.%` format.
- Generates DDL for an encrypted key with `-N<db_name>.<owner>.<key_name>`.
- Generates DDL for all items of a specific object type on your server.
- Enforces strict order in which it parses the names in the `-N<db_name>.<owner_name>.<table_name>.<object_name>` format. If you only provide three arguments, `ddlgen` assumes they are `<owner_name>`, `<table_name>`, and `<object_name>`, in that order. Alternatively, you can also use `-N<owner_name>.<table_name> -D<db_name>`. `ddlgen` does not impose this restriction if `<object_name>` is an index (`I`).

`-D<dbname>`

specifies the name of the database for the object you specify in the `-N` option. The default is the user's default database.

You cannot use the `-D` parameter when generating DDL for all triggers of a table.

`-C<property_name>=<property_value>`

allows you to set connection properties. You can set multiple properties; separate them with commas, such as:

```
-C<property_value1>=<property_value1>,<property_name2>=<property_value2>
```

When you have a large database with many objects, you can improve the performance of `ddlgen` by using `-CNUMBER` to specify the number of connections. To use `-CNUMBER`:

- Make sure you set the "number of user connections" configuration option to a high enough number to accommodate your needs.
- Increase the "procedure cache size" and "max memory" configuration options.

To connect to an SAP ASE server using the `ddlgen` utility when setting `net password encryption reqd` to 1 or 2, use the parameter `-C` parameter to specify your connection properties:

```
ddlgen -S<host_name>:<port_number> -Usa -P**** -TDB -N<db_name> -CENCRYPT_PASSWORD=true
```

See *Reference Manual: Configuration Parameters* > `net password encryption reqd` for more information about this configuration parameter.

`-X<extended_object_type>`

differentiates:

- User tables (OU) from proxy tables (OD) when you specify a table as your object type (-TU)
- Temporary databases (OD) from normal databases (OU) or archive databases (OA) when you specify database as your object type (-TDB)
- SQLJ procedures (OD) from stored procedures (OU) when you specify procedure as your object type (-TP).

If `<object_type>` (-T) is U (table) and -x is not specified, `ddlgen` generates DDL for both user tables and proxy tables. To generate DDL only for:

- **user tables** – use the OU extended object type with the -x option.
- **proxy tables** – use the OD extended object type with the -x option.
- **in-memory databases, caches, and devices** – use the OI extended object type with the -x option.
- **in-memory temporary databases** – use the OIT extended object type with the -x option.

i Note

`ddlgen` does not support schema generation for system tables.

Use `<extended_object_type>` DE (-XDE), with the database object type (-TDB) to generate a database and all of its objects in correct dependent order.

Use `<extended_object_type>` ID (-XID), with the database object type (-TDB) to generate a database with a database ID number (`dbid`).

-O<output_file>

specifies an output file for the generated DDL. If you do not specify -o, the DDL you create appears in a console window.

-E<error_file>

specifies a log file for recording errors. If you do not specify -E, the generated errors appear in a console window.

-L<progress_log_file>

specifies a log file for recording the progress of `ddlgen`. If you do not specify -L, the progress is not recorded.

-J<client_charset>

specifies the character set to use on the client. -J<client_charset> requests that the SAP ASE server convert to and from <client_charset>, the character set used on the client. A filter converts input between <client_charset> and the SAP ASE character set.

Omitting -J sets the character set to a default for the platform. The default may not necessarily be the character set that the client is using.

i Note

For HP platforms – you must use `-Jiso_1` to specify the correct character set.

-IC

generate DDL for one or all logical clusters on a server.

-F

filters out indexes, triggers, constraints, and functions (including scalar and SQLJ) out of table and database definitions in the DDL of table- and database-level objects. The valid filters are:

For tables [% | I | RI | KC | LK | TR | PC]

For databases [% | SGM | GRP | USR | R | D | EK | LK | UDD | U | V
| P | XP | I | RI | KC | TR | F]

The filter options are:

- % – everything. Retrieves the schema-only definition of a database or table.
- SGM – segments
- GRP – groups
- USR – users
- R – rules
- D – defaults
- EK – encrypted keys
- LK – logical keys
- UDD – user-defined datatypes
- U – user tables
- V – views
- P – stored procedures
- PC – partition condition
- XP – extended stored procedures
- I – indexes
- RI – referential integrity constraints
- KC – primary- and unique-key constraints
- TR – triggers
- F – functions

If you use an invalid filter parameter, `ddlgen` generates a warning, ignores that parameter, and continues with the rest of the valid parameters you specify.

If you specify % along with other filter parameters, `ddlgen` ignores all other filterable parameters, and only shows schema-only definitions. `ddlgen` then continues to evaluate the dependencies within the subset of the applied as the filterable parameters for the database.

-V

displays the version and copyright message of `ddlgen` and returns to the operating system.

Examples

Archive database

To generate DDL for all archive databases, use the extended filter option "OA."

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TDB -N% -XOA
```

To generate DDL for a single archive database, use the syntax for normal databases. This example creates DDL for the archive database `adb1`.

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TDB -Nadb1
```

Caches

Generates DDL for a cache called `default data cache` on a machine named `HARBOR` using port `1955`:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TC -N"default data cache"
```

To generate DDL for all caches:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TC -N%
```

Connection properties

Generates DDL for a database that uses an encrypted password for its connection:

```
ddlgen -Usa -Psybase -Sbjrhx64:7710 -Tdb -Nmodel -CENCRYPT_PASSWORD=true
```

Connection numbers

Generates DDL to open five connections to SAP ASE:

```
ddlgen -Usa -P -SHARBOR:1955 -CNUMBER=5
```

Databases

Generates DDL for a database called `pubs2` on a machine named `HARBOR` using port `1955`:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TDB -Npubs2
```

If you do not specify a `<dbname>`, `ddlgen` generates DDL for the default database of `<login>`:

```
ddlgen -U<login> -P<password> -S<server>:<port>
```

If you do not use the `-T` parameter, `ddlgen` generates DDL for a default-type database:

```
ddlgen -U<login> -P<password> -S<server>:<port> -N<dbname>
```

To generate DDL for all databases:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -N%
```

Defaults

Generates DDL for a default called "phondflt" owned by jones in the `pubs2` database on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TD -Njones.phonedflt -Dpubs2
```

Alternatively, because `ddlgen` allows you to use a fully qualified name in the `-N` flag, omit the `-D<dbname>` and include the database name in the `-N` option:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TD -N<dbname>.<owner>.<defaultname>
```

To generate DDL for all defaults in a database owned by "owner":

```
ddlgen -U<login> -P<password> -S<server>:<port> -TD -N<owner>.% -D<dbname>
```

Database devices

Generates DDL for a database device called `master` running on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TDBD -Nmaster
```

To generate DDL for all database devices:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDBD -N%
```

Database ID

Generates DDL for a database with a database ID number:

```
ddlgen -S<server> -P<password> -U<login> -TDB -N<dbname> -XID
```

Conversely, this generates DDL for a database without a database ID number:

```
ddlgen -S<server> -P<password> -U<login> -TDB -N<dbname>
```

Dump devices

Generates DDL for a dump device called `tapedump1` running on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TDPD -Ntapedump1
```

To generate DDL for all dump devices:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDPD -N%
```

Encrypted keys

Generates DDL for all encryption keys in the `accounts` database on a machine named "HARBOR" using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TEK -Naccounts.dbo.%
```

Alternatively, you use the `-D` option to specify the database name.

Encrypted keys

Generate DDL for an encryption key "ssn_key" in a the SampleKeysDB database:

```
ddlgen -Usa -P -S<server> -TEK -NSampleKeysDB.dbo.ssn_key
```

Add -FEKC to avoid creating DDL for key copies when generating DDL for the "ssn_key" encryption key:

```
ddlgen -Usa -P -S<server> -TEK -NSampleKeysDB.dbo.ssn_key -FEKC
```

Encrypted passwords

Generates system encryption passwords along with DDLs for encryption keys when you include the extended option -XOD. The output generates the `sp_encryption` statement followed by DDL statements for all encrypted keys. This generates DDL for the login "george" on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TEK -Ngeorge -XOD
```

To generate DDL for all the encrypted keys in the authors database on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TEK -Nauthors.dbo.%
```

Engine groups

Generates DDL for an engine group called LASTONLINE running on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TEG -NLASTONLINE
```

To generate DDL for all engine groups:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TEG -N%
```

Execution class

Generates DDL for an execution class called EC2 running on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TEC -NEC2
```

To generate DDL for all execution classes:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TEC -N%
```

Extended object type

The example uses the following:

```
create database tdb on default = '20M'
use tdb
create table test (
  fid varchar(10)
)
create view View_A as select * from test
create view View_B as select * from View_A
CREATE FUNCTION Func_C(@ID VARCHAR(10))
RETURNS varchar(8000)
AS
BEGIN
```

```

declare @ret varchar(8000)
select @ret = (select fid from View_B)
return @ret
END
go
create view View_D as
select * from test where fid>dbo.Func_C('111')
go
CREATE FUNCTION Func_no_depend(@ID VARCHAR(10))
RETURNS varchar(8000)
AS
BEGIN
declare @ret varchar(8000)
return @ret
END
go

```

Issuing `ddlgen` returns all objects of database `tdb` in correct dependent order:

```
ddlgen -S -U -P -TDB -Ntdb -XDE
```

1. Segment
2. Group
3. User
4. Rules
5. Defaults
6. UDDs
7. Encrypted Keys
8. User Tables
9. Proxy Tables
10. Triggers
11. Functions and Views
 1. All functions without any dependency
 2. All views without any dependency
 3. All functions and all views with any dependency on any objects
12. Instead of trigger
13. Stored Procedures
14. Extended Stored Procedures
15. PRS
16. User Defined Web Services

Extended stored procedures

Generates DDL for the `xp_cmdshell` extended stored procedure in the `pubs2` database, owned by Jones and running on a machine named HARBOR using port 1955, by using the fully qualified `<dbname>.<owner>.<extendedstoredprocedure>` format with the `-N` option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TXP -Npubs2.jones.xp_cmdshell
```

Alternatively, use the `-D` option instead of using the fully qualified name:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TXP
-N<owner>.<extendedstoredprocedure> -D<dbname>
```

To generate DDL for all extended stored procedures:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TXP -N<dbname>.<owner>.%
```

Thread pools

Generate DDL for one thread pool:

```
ddlgen -U[userName] -P[password] -S[host:port] -TTP -Nthreadpoolname
```

Generate DDL for all thread pools:

```
ddlgen -U[userName] -P[password] -S[host:port] -TTP -N%
```

Filters

Generates DDL for the `authors` table in the `pubs2` database, filtering for all indexes (`I`), and referential integrity constraints (`RI`), primary and unique key constraints (`KC`), triggers (`TR`), and partition condition (`PC`) from the DDL of a table:

```
ddlgen -Uroy -Proy123 -TU -Nauthors -Dpubs2 -F%
```

Alternatively, specify each of the filters individually:

```
ddlgen -U<login> -P<password> -TU -N<dbname>.<owner>.<table>  
-FI,RI,KC,TR,F
```

This generates the definition of `<table_name>` while filtering out foreign keys and primary-unique keys:

```
ddlgen -U<login> -P<password> -TU -N<table_name> -D<dbname>  
-FRI,KC
```

Both of these generate foreign keys for a specified user in the entire database:

```
ddlgen -U<login> -P<password> -TRI -N%.%.% -D<dbname>
```

Or:

```
ddlgen -U<login> -P<password> -TRI -N<dbname>%.%.%
```

Both of these generate DDL for the primary and unique keys of all the tables in a database that begin with "PK":

```
ddlgen -U<login> -P<password> -TKC -N<dbname>%.%.PK%
```

Or:

```
ddlgen -U<login> -P<password> -TKC -N%.%.PK% -D<dbname>
```

This generates schema-only definition of a database:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TF -N<dbname> -F%
```

Alternatively, specify each of the filters individually:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -N<dbname>  
-FSGM,GRP,USR,R,D,UDD,V,P,XP,I,RI,KC,TR
```


This generates the database DDL skipping the compiled object:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -N<dbname>
-FTR,D,XP,V,R
```

This generates database definition without a table definition:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -Ndbname
-FU
```

Filter all functions, including scalar and SQLJ functions:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -Ndbname
-FF
```

Functions

Generates DDL for all SQLJ functions:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TF -N<dbname>.%.% -XOD
```

Generates DDL for all Scalar functions:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TF -N<dbname>.%.% -XOU
```

To generate DDL for all groups:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TGRP -N<dbname>.%
```

Groups

Generates DDL for a group called "public" in the pubs2 database, running on a machine named HARBOR using port 1955, by using the fully qualified <dbname>.<groupname> format in the -N option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TGRP -Npubs2.public
```

Alternatively, use the -D option to specify the <dbname>:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TGRP -N<groupname> -D<dbname>
```

To generate DDL for all groups:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TGRP -N<dbname>.%
```

Generates DDL for a temporary database group called "tempdb" in the pubs2 database, running on a machine named HARBOR using port 1955, by using the fully qualified <dbname>.<groupname> format in the -N option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TTDBG -Ntempdbpublic
```

To generate DDL for all temporary database groups:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TTDB -N<dbname>.%
```

In-memory database

Generates DDL for an in-memory database:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TDB -Nimdb_1
```

Use the same syntax to generate DDL for an in-memory temporary database:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TDB -Nimdb_temp1
```

Indexes

Generates DDL for an index called `au_lname` for the table `authors` owned by `dbo`, in the `pubs2` database:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TI -Ndbo.authors.au_lname -Dpubs2
```

Alternatively, because `ddlgen` allows you to use a fully qualified name in the `-N` flag, omit the `-D` and include the database name in the `-N` option:

```
ddlgen -U<login> -P<password> -S<server>:<port>
      -TI -N<dbname>.<owner>.<tablename>.<indexname>
```

If you use a fully qualified name, you may omit the `-D` option.

To generate DDL for all indexes for a single table:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TI
      -N<dbname>.<owner>.<tablename>.%
```

To generate DDL for all indexes of all tables in a database:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TI
      -N<dbname>.%.%.%
```

For example, this generates DDL for all indexes for all tables in the `pubs2` database:

```
ddlgen -Usa -P -SHARBOR:1955 -TI -Npubs2.%.%.%
```

Instead of triggers

Generates one view and its (`instead of`) trigger, and next view and its (`instead of`) trigger:

```
ddlgen -S -U -P -TV -N<dbname>.<ownername>.<viewname>
```

Generates triggers only for tables:

```
ddlgen -S -U -P -TTR
```

Generates `instead of` triggers for views:

```
ddlgen -S -U -P -TIT
```

Keys

Both of these generate DDL for the primary and unique keys of all the tables in a database that begin with "PK":

```
ddlgen -Usa -P -TKC -N<dbname>.%.%PK%
```

Or:

```
ddlgen -Usa -P -TKC -N%.%.PK% -D<dbname>
```

Load Profile

Generates DDL for one load profile:

```
ddlgen -U<login> -P<password> -S<server>:<port>  
-TLDP -N<dbname>
```

Generates DDL for all load profiles:

```
ddlgen -U<login> -P<password> -S<server>:<port>  
-TLDP -N%
```

Logical cluster

Generates DDL for "my_lcluster" on server "ase1", enter:

```
ddlgen -Usa -P -Sase1 -TLC -Nmy_lcluster
```

Logical cluster

Generates DDL for all logical clusters on server "ase1", enter:

```
ddlgen -Usa -P -Sase1 -TLC -N%
```

Logical keys

LK generates logical keys of table defined by `sp_primarykey`, `sp_commonkey`, `sp_foreignkey` statements. Since these keys do not have a name, the name of the object in this case would be the name of the table. This example generate a DDL for logical keys of table authors in database pubs2 running on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TLK -Npubs2.dbo.authors
```

To generate DDL for all logical keys in database pub2 use:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TLK -Npubs2.%.%
```

To filter out logical keys definition from DDL of table authors use LK in -F argument, use:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TLK -Npubs2.dbo.authors -FLK
```

Logins

TL generates DDL for one or all logins. This example generates DDL for all logins on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TL -N%
```

i Note

The password in the DDL generated for all logins is "password".

Alternatively, specify an individual login by using `-N<username>` instead of `-N%`:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TL -N<username>
```

This example generates DDL for the login "george" on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TL -Ngeorge
```

Remote servers

Generates DDL for a remote server called ORANGE on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TRS -NORANGE
```

To generate DDL for all remote servers:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TRS -N%
```

Roles

Generates DDL for the sa_role on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TRO -Nsa_role
```

To generate DDL for all roles:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TRO -N%
```

i Note

The password in the DDL generated for all roles is "password".

Rules

Generates DDL for all rules associated with authors on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TR -Nauthors.dbo.%
```

The % symbol tells ddlgen to create DDLs for all rules that exist on the server.

You can also give the fully qualified name of the rule:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TR -N<dbname>.<owner>.<rulename>
```

Alternatively, also use the `-D` parameter:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TR -N<owner>.<rulename> -D<dbname>
```

Segments

Generates DDL using the fully qualified `<dbname>.<segmentname>` format in the `-N` option for a segment called logsegment for the pubs2 database, on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TSGM -Npubs2.logsegment
```

Alternatively, specify the `<dbname>` using the `-D` option:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TSGM -N<segmentname> -D<dbname>
```

To generate DDL for all segments:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TSGM -N<dbname>.%
```

SQLJ functions

Generates DDL for a SQLJ function named `region_of` owned by `dbo` in database `master`:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TF -Nmaster.dbo.region_of
```

Alternatively also use the `-D` parameter:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TF -Ndbo.region_of -Dmaster
```

To generate DDL for all SQLJ functions in a database, use object type `F`:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TF -N<dbname>.<owner>.%
```

SQLJ procedures

A kind of stored procedure, you generate DDL for SQLJ procedures along with DDL for stored procedures. This generates DDL for all stored procedures—including SQLJ procedures—owned by `dbo` in the `master` database:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TP -Nmaster.dbo.%
```

To generate DDL for all SQLJ procedures that are only owned by `dbo` in the `master` database, use this, where the extended type `OD` refers to SQLJ procedures:

```
ddlgen -U<login> -P<password>-S<server>:<port> -TP -Nmaster.dbo.% -XOD
```

To generate DDL for all procedures except SQLJ procedures owned by `dbo` in the `master` database, use this, where the extended type `OU` refers to all stored procedures except SQLJ procedures:

```
ddlgen -U<login> -P<password>-S<server>:<port> -TP -Nmaster.dbo.% -XOU
```

Stored procedures

Generates DDL for the `sp_monitor` stored procedure for the `pubs2` database on a machine named `HARBOR` using port `1955`, using the fully qualified `<dbname>.<owner>.<procedure_name>` format for the `-N` option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TP -Npubs2.dbo.sp_monitor
```

Alternatively, specify the `<dbname>` using the `-D` option:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TP -N<owner>.<procedurename> -D<dbname>
```

To generate DDL for all stored procedures:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TP -N<dbname>.<owner>.%
```

SSL-enabled servers

Generates DDL for objects in the `pubs2` database for an SSL-enabled SAP ASE server running on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -Sssl:HARBOR:1955 -TDB -Npubs2
```

Tables

Generates DDL for all user tables in the `pubs2` database owned by "dbo" and running on a machine named HARBOR using port 1955:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TU -Ndbo.% -Dpubs2
```

You can also use the `-N` parameter to give the fully qualified name of the table:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TU  
-N<dbname>.<tableowner>.<tablename>
```

Alternatively, also use the `-D` parameter to specify the database:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TU  
-N<tableowner>.<tablename> -D<dbname>
```

To generate DDL for all proxy tables, which uses the value `OD`, use `-XOD` instead, where `x` is the extended type, and `OD` denotes proxy tables:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TU  
-N<tableowner>.% -D<dbname> -XOD
```

To generate DDL for all user tables, which uses the value `OU`, use `-XOU` instead, where `x` is the extended type, and `OU` denotes user tables:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TU  
-N<tableowner>.% -D<dbname> -XOU
```

To generate DDL for all tables, including user tables and proxy tables:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TU -N<dbname>.<tableowner>.%
```

Temporary databases

Generates DDL for all databases, including `tempdb`:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -N%
```

To generate DDL for all temporary databases, use the `OD` extended database type:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -XOD -N%
```

Although you can use the `OD` extended type in SAP ASE versions 12.5.0.3 and later, versions earlier than 12.5.0.3 issue warning messages. Safely ignore this message; `ddlgen` continues processing the command. To generate DDL for all databases except temporary databases, use the `OU` extended type:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -XOU -N%
```

This generates DDL for a temporary database named `tempdb1`:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TDB -Ntempdb1
```

The output includes:

- A create temporary database statement:

```
create temporary database tempdb1 on master = 4,  
    asdas = 2  
go
```

- An `sp_tempdb bind` statement where the `isql` application is bound to `tempdb1`:

```
sp_tempdb 'bind','ap','isql','DB','tempdb1'  
go
```

Note

DDL for objects such as views, stored procedures, and tables is not generated along with DDL for a temporary database because these objects are temporary, and are re-created when the server restarts.

When you use the `-F` parameter to filter a table while generating DDL for a database object, then indexes, referential integrity, key constraints and triggers automatically get filtered, as they are a subset of the table object.

Triggers

Generates DDL for the trigger `checksum` for the `pubs2` database on a machine named `HARBOR` using port 1955, using the fully qualified `<dbname>.<owner>.<trigger_name>` format for the `-N` option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TTR -Npubs2.dbo.checksum
```

Alternatively, specify the `<database_name>` using the `-D` option:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TTR  
-N<owner>.<triggername> -D<dbname>
```

You can also generate DDL for a trigger for a table, using:

```
-N<db_name>.<table_owner>.<table_name>.<trigger_name>
```

To generate DDL for all triggers of a database:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TTR -N<dbname>.<owner>.%
```

You can also use this format to generate DDL for all triggers of a table:

```
-N<db_name>.<table_owner>.<table_name>.%
```

i Note

You cannot use the `-D` parameter when generating DDL for all triggers of a table.

User-defined datatypes

Generates DDL for the user-defined datatype "Identype" for the `pubs2` database on a machine named HARBOR using port 1955 using the fully qualified `<dbname>.<userdefined_datatype>` format for the `-N` option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TUDD -Npubs2.Identype
```

Alternatively, use the `-D` option to specify the `<dbname>`:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TUDD  
-N<userdefined_datatype> -D<dbname>
```

To generate DDL for all user-defined datatypes:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TUDD -N<dbname>.%
```

User-defined messages

Generates DDL for all user-defined messages in the `pubs2` database using the `UDM` parameter of the `-T` option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TUDM -Npubs2.%
```

To generate DDL for a specific user-defined message, use:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TUDM -N<dbname>.<messagenum>
```

Views

Generates DDL for a view named `retail` owned by Miller in the `pubs2` database running on a machine named HARBOR using port 1955, by using the fully qualified `<dbname>.<owner>.<viewname>` format with the `-N` option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TV -Npubs2.miller.retail
```

Alternatively, use the `-D` option instead of using the fully qualified name:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TV -N<owner>.<viewname> -  
D<dbname>
```

To generate DDL for all views:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TV -N<dbname>.<owner>.%
```

User-defined Web services

Generates DDL for a named user-defined Web service, `sp_who_service`, in the `pubs2` database running on a machine named HARBOR using port 1995, by using a fully qualified `<dbname>.<username>.<webservice_name>` format with the `-N` and `-T` options:

```
ddlgen -Uroy -Proy123 -SHARBOR:1995 -TWS  
-Npubs2.dbo.sp_who_service
```


The syntax for generating DDL for a named user-defined Web service is:

```
ddlgen -U<login> -P<password> -S<host_name>:<port> -TWS -N<dbname.owner.webservice_name>
```

To generate DDL for all user-defined Web services owned by all users in database <dbname>:

```
ddlgen -U<login> -P<password> -S<host_name>:<port> -TWS -N<dbname.>%.%
```

Note

An `sp_webervices 'addalias'` statement is only generated if the DDL is to be generated for all user-defined web services or for a database.

Users

Generates DDL for a user named Smith in the `pubs2` database running on a machine named HARBOR using port 1955, by using a fully qualified <dbname>.<username> format with the `-N` option:

```
ddlgen -Uroy -Proy123 -SHARBOR:1955 -TUSR -Npubs2.smith
```

Alternatively, use both the `-N` and `-D` options instead of using a fully qualified name in `-N`:

```
ddlgen -U<login> -P<password> -S<host_name>:<port> -TUSR -N<username> -D<dbname>
```

To generate DDL for all users:

```
ddlgen -U<login> -P<password> -S<server>:<port> -TUSR -N<dbname.>%.%
```

Permissions

Users must have either `sa_role` or `sso_role` to generate DDL for:

- Encryption keys
- Logins
- Roles

For all other objects, users do not need any specific permissions or roles to generate DDL.

Related Information

[Hiding with Passwords in ddlgen \[page 83\]](#)

[Database Creation and Manipulation Utilities \[page 11\]](#)

2.13.1 Usage for ddlgen

There are additional considerations when using `ddlgen`.

- `ddlgen` does not identify existing sequences within views, stored procedures or triggers. For this reason, when generating DDL for a database, first run `ddlgen` on those views, stored procedures and triggers that are independent, before running `ddlgen` on those with dependencies. For example, if view B depends on view A, first run `ddlgen` on view A, before running it on view B.
- The default information for `ddlgen` is:

Option	Parameter	Required	Default
-U	<code><username></code>	Yes	None
-P	<code><password></code>	Yes	None
-S	<code><host_name>:<port_number></code>	Yes	None
-T	<code><object_type></code> See the <code>-T</code> parameter description for a list of valid object types	No	Database
-N	<code><object_name></code>	Yes, if <code><object_type></code> for <code>-T</code> is not DB (database)	Default database name of <code><username></code> , if <code>-T<object_type></code> is db or if <code>-T</code> is not specified
-D	<code><database_name></code>	No	Default database of <code><username></code>
-X	<code><extended_object_type></code> Options are: <ul style="list-style-type: none"> ○ OU – for user tables, user databases (excluding temporary databases), and stored procedures (excluding SQLJ procedures). ○ OD – for proxy tables, temporary databases, and SQLJ procedures. Use only when the <code><object_type></code> for <code>-T</code> is: <ul style="list-style-type: none"> ○ U (user table) ○ P (procedure) ○ DB (database) 	No	None
-O	<code><output_file_name></code>	No	Standard out
-E	<code><error_file_name></code>	No	Standard out

Option	Parameter	Required	Default
-L	<log_file_name>	No	None
-V	<version_number> of ddlgen	No	None

- At the command line, invoke `ddlgen` using the `ddlgen` shell script file (`ddlgen.bat` for Windows), included in your SAP ASE installation. The main class in `DDLGen.jar` is `com.sybase.ddlgen.DDLGenerator`.
- In the output DDL of `create table`, bind statements are generated as independent DLL instead of dependent DLL.
- The `PN` type allows you to generate DDL for tables with partition names. Use partition names and the `optdiag` utility to analyze optimizer behavior by creating empty partitioned tables with simulated metadata.

To generate names for local index partitions, use:

```
ddlgen - TU -XPN
```

To generate DDL for all user tables with partition names, use:

```
ddlgen -TU -XPN,OU
ddlgen -TU -XOU,PN
```

2.13.1.1 Hiding with Passwords in ddlgen

When you issue the `ddlgen` utility in a UNIX command-line environment, other users on that UNIX machine can see your `ddlgen` command—including its password—if they issue the `ps` process management command, which shows the status of processes that are running on that machine.

Context

The `ddlgen -P` password parameter option lets you to invoke `ddlgen` from a script so that the password is hidden from other users.

To achieve this, set the `$PSWD` environment variable to point to your SAP ASE login password, and include the string `"ext"` in the `-P` parameter. `ext` acts as a pseudo password, allowing you to supply the actual password in the next line. Set `$PSWD` at the command line or a Bourne shell script, but not from the C-shell.

Procedure

1. Set the `$PSWD` environment variable:

```
setenv PSWD <pass_word>
```

2. Run `ddlgen`:

```
ddlgen -U<login> -Pext -S<server>:<port> -T<type> -N<name> << END
$PSWD
END
```

Results

If you prefer to keep your password in a file, replace `$PSWD` with ``cat <filename>``, where `<filename>` is the location of your password file. For example:

```
ddlgen -U<login> -Pext -S<server>:<port> -T<type> -N<name> << END
`cat <filename>`
END
```

Note

Enclose `cat <filename>` with a grave accent (```); `ddlgen` returns an error if you use an apostrophe.

2.13.1.2 Using Passwords with Special Characters

There are restrictions when using special characters for the password option of the `ddlgen` utility.

The following characters are special characters of shell scripts: `*`, `>`, `<`, `%`, `$`, `&`

When using these characters in a password for `ddlgen`, use single quotes around the password and precede the special character with an escape character. For example,

```
'K\>iD\&$9'
```

The command line syntax for the example above is:

```
ddlgen -Shost:port -Uusername -P'K\>iD\&$9' -Ttype -Nobjectname
```

These special characters do not require single quotes or an escape character when used in passwords: `#`, `$`

2.13.1.3 ddlgen and Encryption

You can use the `ddlgen` utility with both encrypted columns and encrypted databases.

`ddlgen` provides support for both encrypted databases and encrypted columns.

For databases, use `ddlgen` to:

- Create an encrypted database
- Create a database encryption key

`ddlgen` adds support for transparent database encryption with these values for the `-TEK` parameter:

- `-XOCE` – only generate DDL from column encryption keys
- `-XOMK` – only generate DDL from master key or dual master key
- `-XODE` – only generate DDL from database encryption keys (dek)

2.13.1.3.1 ddlgen for Encrypted Columns

You can use the `ddlgen` utility with encrypted columns.

- The `ddlgen` utility supports pre-15.0.2 encryption. Pre-15.0.2 `ddlgen` support includes generating DDL for an encryption key in a database, and generating DDL to synchronize encryption keys across servers. If you use `ddlgen` to generate DDL for encryption keys on SAP ASE version 15.0.2 or later, the DDL may cause errors on a pre-15.0.2 version SAP ASE, specifically if an encryption key is encrypted by a user specified-password or has key copies.
- The type `EK`, used for encryption key, generates the DDL to create an encryption key and to grant permissions on it. `ddlgen` generates encrypted column information and a `grant decrypt` statement, along with the table definition.
- If you do not specify the `-XOD` option, and the key to be migrated has been created in the source database using the `with passwd` clause, `ddlgen` generates a `create encryption key` command with `passwd` as its explicit password. This is similar to what `ddlgen` does for roles and login passwords.
- The `-XOD` generates the `create encryption key` that specifies the key's encrypted value as represented in `sysencryptkeys`. Use the `-XOD` to synchronize encryption keys across servers for data movement.
`ddlgen -XOD` generates DDL that includes a system encryption password (if it was set and DDL is generated for a key encrypted with a system encryption password) and DDL for keys.

2.13.1.3.2 Encrypted Columns and Specifying the -XOD Flag in ddlgen

There are special considerations when using the `ddlgen -XOD` option with encrypted columns.

If you do not specify the `-XOD` flag in `ddlgen`, and you:

- **Did not** specify a password when the encryption key was created – `ddlgen` generates DDL with no password.
- Specified a password when the encryption key was first created – `ddlgen` generates the default password of `'password'`. This is similar to what `ddlgen` does for roles and login passwords, and its output looks similar to:

```
-----
-- DDL for EncryptedKey 'ssn_key'
-----
print 'ssn_key'
--The DDL is generated with a default password - 'password' as
--a password was specified when this key was created.
create encryption key SampleKeysDB.dbo.ssn_key for AES
with keylength 128
passwd 'password'
```

```
init_vector random
go
```

When you specify the `-XOD` flag in `ddlgen`, `ddlgen` generates DDL that includes a system encryption password (if it has been set and DDL is generated for a key encrypted with a system encryption password) and DDL for keys.

Use this syntax to generate a system encryption password:

ddlgen -Usa -P -S<server> -TEK -NsampleKeysdb.dbo.ek1 -XOD The output would look like:

```
-- System Encryption Password
use SampleKeysDB
go
sp_encryption 'system_encr_passwd',
'0x8e050e3bb607225c60c7cb9f59124e99866ca22e677b2cdc9a4d09775850f4721',
NULL, 2, 0
go
-----
-- DDL for EncryptedKey 'ek1'
-----
print '<<<<< CREATING EncryptedKey - "ek1" >>>>>'
go
create encryption key SampleKeysDB.dbo.ek1 for AES
with keylength 128
passwd 0x0000C7BC28C3020AC21401
init_vector NULL
keyvalue 0xCE74DB1E028FF15D908CD066D380AB4AD3AA88284D6F7742DFFCADCAABE4100D01
keystatus 32
go
```

Note

When migrating keys from a source to a target server using `ddlgen`, set the system encryption password to NULL (if it exists) in the target server if you want to run the `ddlgen` output (from the source server) for encryption keys generated using “`-XOD`” parameter. Failure to do this results in errors when you try to execute the `ddlgen` output against the target server.

2.13.1.3.3 ddlgen Support for Key Copies

The `ddlgen` utility also generates DDL for key copies along with the DDL for base key.

For example, this syntax would generate DDL for “`ssn_key`” and its key copies:

ddlgen -Usa -P -S<server> -TEK -NSampleKeysDB.dbo.ssn_key

The output from `ddlgen` would look like:

```
-----
-- DDL for EncryptedKey 'ssn_key'
-----
print 'ssn_key'
--The DDL is generated with a default password - 'password' as
--a password was specified when this key was created.
create encryption key SampleKeysDB.dbo.ssn_key for AES
with keylength 128
passwd 'password'
init_vector random
```

```

go
print 'Key Copies for ssn_key'
-- Generating DDL for Key Copies for 'ssn_key'
alter encryption key 'ssn_key'
with passwd 'password'
add encryption with passwd 'passwd'
for user 'dbo'.

```

If you include the `-XOD` flag, the DDL for key copy would look like:

```

alter encryption key SampleKeysDB.dbo.ssn_key add encryption
with keyvalue
0x84A7360AA0B28801D6D4CBF2F8219F634EE641E1082F221A2C58C9BBEC9F49B501
passwd 0x000062DF4B8DA5709E5E01
keystatus 257
for user 'user1'
go

```

2.13.1.3.4 EKC Encryption Key Copy Filter and ddlgen

The `ddlgen` utility supports the `EKC` (encryption key copy) extended type for its `-F` filter argument, to suppress the generation of key copies for encryption keys.

This example uses `-FEKC` to avoid creating DDL for key copies when generating DDL for the “`ssn_key`” encryption key:

```
ddlgen -Usa -P -S<server> -TEK -NSampleKeysDB.dbo.ssn_key -FEKC
```

The output from `ddlgen` would look like:

```

-----
-- DDL for EncryptedKey 'ssn_key'
-----
print 'ssn_key'
--The DDL is generated with a default password - 'password' as
--a password was specified when this key was created.
create encryption key SampleKeysDB.dbo.ssn_key for AES
with keylength 128
passwd 'password'
init_vector random
go

```

2.13.1.4 Create Table DDL

`ddlgen` can generate `decrypt_default` statements (if set for an encrypted column) along with DDL of a table.

This example issues a `ddlgen` command on a table called `employee` which has an “`ssn`” column that is encrypted with encryption key “`ssn_key`,” and a `decrypt_default` value that is set to “100”:

```
ddlgen -Usa -P -S<server> -TU -Nemployee
```

The DDL output would look like:

```
create table employee (
  ssn          int          not null encrypt with ssn_key decrypt_default 100 ,
  last_name    int          not null ,
  first_name   int          not null
)
lock allpages
on 'default'
go
```

2.14 defncopy

Copies definitions for specified views, rules, defaults, triggers, or procedures from a database to an operating-system file or from an operating-system file to a database.

The utility is located in:

- (UNIX) \$SYBASE/\$SYBASE_OCS/bin.
- (Windows) %SYBASE%\%SYBASE_OCS%\bin, as defncopy.exe.

Syntax

```
defncopy
  [-X]
  [-a <display_charset>]
  [-H <hostname>]
  [-I <interfaces_file>]
  [-J [<client_charset>]]
  [-k <secure_store_key>]
  [-K <keytab_file>]
  [-P< password>]
  [-R< remote_server_principal>]
  [-S [<server_name>]]
  [-U <username>]
  [-V <security_options>]
  [-Z <security_mechanism>]
  [-z <language>]
  { in <file_name database_name> |
    out <file_name database_name >[<owner>.]<object_name>
    [[<owner>.]<object_name>...] }
```

Or

```
defncopy -v
```

Parameters

-a <display_charset>

runs `defncopy` from a terminal whose character set differs from that of the machine on which `defncopy` is running. Use `-a` in conjunction with `-J` to specify the character set translation file (`.xlt` file) required for the conversion. Use `-a` without `-J` only if the client character set is the same as the default character set.

i Note

The `ascii_7` character set is compatible with all character sets. If either the SAP ASE character set or the client character set is set to `ascii_7`, any 7-bit ASCII character can pass unaltered between client and server. Other characters produce conversion errors. See the *System Administration Guide* for more information on character set conversion.

-H `<hostname>`

sets the client host name.

-I `<interfaces_file>`

specifies the name and location of the interfaces file to search when connecting to the SAP ASE server. If you do not specify `-I`, `defncopy` looks for a file named `interfaces` in the directory specified by the SYBASE environment variable in UNIX platforms, and `sql.ini` in the `ini` subdirectory for your Sybase release directory in Windows.

-J `<client_charset>`

specifies the character set to use on the client. A filter converts input between `<client_charset>` and the SAP ASE character set.

`-J <client_charset>` requests that the SAP ASE server convert to and from `<client_charset>`, the client's character set.

`-J` with no argument sets character set conversion to NULL. No conversion takes place. Use this if the client and server are using the same character set.

Omitting `-J` sets the character set to a default for the platform. The default may not be the character set that the client is using. For more information about character sets and their associated flags, see the *System Administration Guide* and configuration guide for your platform.

-K `<keytab_file>`

specifies the path to the keytab file used for authentication in DCE.

-k `<secure_store_key>`

specifies the secure store key that contains the client's credentials and server connection information, such as username, password, hostname, and port number of the server. Instead of entering the username and password, you need to provide the key to connect to the SAP ASE server.

-P `<password>`

specifies your password. If you do not specify `-P`, `defncopy` prompts for your password.

-R `<remote_server_principal>`

specifies the principal name for the server. By default, a server's principal name matches the server's network name (which is specified with the `-s` parameter or the

DSQUERY environment variable). Use the `-R` parameter when the server's principal name and network name are not the same.

-S <server_name>

specifies the name of the SAP ASE server to which to connect. If you specify `-S` with no argument, `defncopy` looks for a server named SYBASE. If you do not specify `-S`, `defncopy` uses the server specified by your DSQUERY environment variable.

-U <username>

specifies a login name. Login names are case sensitive. If you do not specify `<username>`, `defncopy` uses the current user's operating system login name.

-v

displays the version and copyright message of `defncopy` and returns to the operating system.

-V <security_options>

specifies network-based user authentication. With this option, the user must log in to the network's security system before running the utility. In this case, users must supply their network user name with the `-U` option; any password supplied with the `-P` option is ignored.

`-V` can be followed by a `<security_options>` string of key-letter options to enable additional security services. These key letters are:

- `c` – Enable data confidentiality service
- `i` – Enable data integrity service
- `m` – Enable mutual authentication for connection establishment
- `o` – Enable data origin stamping service
- `r` – Enable data replay detection
- `q` – Enable out-of-sequence detection

-X

initiates the login with client-side password encryption in this connection to the server. `defncopy` (the client) specifies to the server that password encryption is desired. The server sends back an encryption key, which `defncopy` uses to encrypt your password, and the server uses to authenticate your password when it arrives.

If `defncopy` crashes, the system creates a core file which contains your password. If you did not use the encryption option, the password appears in plain text in the file. If you used the encryption option, your password is not readable.

-z <language>

is the official name of an alternate language that the server uses to display `defncopy` prompts and messages. Without the `-z` flag, `defncopy` uses the server's default language.

Add languages to an SAP ASE at installation, or afterwards with the utility `langinstall` (`langinst` in Windows) or the stored procedure `sp_addlanguage`.

-Z <security_mechanism>

specifies the name of a security mechanism to use on the connection.

Security mechanism names are defined in the `$SYBASE/install/libtcl.cfg` configuration file. If no `<security_mechanism>` name is supplied, the default mechanism is used. See the description of the `libtcl.cfg` file in the *Open Client and Open Server Configuration Guide*.

<database_name>

specifies the name of the database to copy the definitions from or to.

<file_name>

specifies the name of the operating system file destination or source for the definition copy. The copy out overwrites any existing file.

in | out

specifies the direction of definition copy.

<object_name>

specifies names of database object for `defncopy` to copy out. Do not use `<objectname>` when copying definitions in.

<owner>

is optional if you or the database owner own the table being copied. If you do not specify an owner, `defncopy` first looks for a table of that name that you own, and then looks for one owned by the database owner. If another user owns the table, specify the owner name or the command fails.

Examples

Files

Copies definitions from the file `new_proc` into the database `stagedb` on server `MERCURY`. The connection with `MERCURY` is established with a user of name "sa" and a NULL password:

```
defncopy -Usa -P -SMERCURY in new_proc stagedb
```

Objects

Copies definitions for objects `sp_calccomp` and `sp_vacation` from the `employees` database on the SYBASE server to the file `dc.out`. Messages and prompts display in french. The user is prompted for a password:

```
defncopy -S -z french out dc.out employees sp_calccomp sp_vacation
```

Connecting to the SAP ASE Server using secure store key

In the following example, the user-generated key, `<userkey>`, which stores the user's credentials, is provided with `defncopy` to connect to the SAP ASE Server.

```
defncopy -k <userkey>
```

Usage

- Use this syntax for `defncopy_r` if you are using threaded drivers.
- Use this syntax for `defncopy` you are using threaded drivers in the IBM platform.
- Set the SYBASE environment variable to the location of the current version of SAP ASE before using `defncopy`.
- Invoke the `defncopy` program directly from the operating system. `defncopy` provides a noninteractive way to copy out definitions (`create` statements) for views, rules, defaults, triggers, or procedures from a database to an operating system file. Alternatively, it copies in all the definitions from a specified file.
- The `in <filename>` or `out <filename>` and the database name are required and must be stated unambiguously. For copying out, use file names that reflect both the object's name and its owner.
- `defncopy` ends each definition that it copies out with the comment:

```
/* ### DEFNCOPY: END OF DEFINITION */
```

Definitions created as text must end with this comment so that `defncopy` can copy them in successfully.

- Enclose values specified to `defncopy` in quotation marks, if they contain characters that could be significant to the shell.

⚠ Caution

Long comments of more than 100 characters that are placed before a `create` statement may cause `defncopy` to fail.

- SDK binaries like `defncopy` use the same names in both 32-bit and 64-bit products. Installing SAP ASE, the SDK, or Open Server 64-bit products with other Sybase 32-bit products overwrites the 32-bit binaries. Starting with SAP ASE 15.0.2 and SDK/Open Server 15.0 ESD #9, the 64-bit binaries are replaced with 32-bit binaries on all 64-bit UNIX platforms. Since 32-bit binaries are included in the 64-bit EBF, the `-v` option of `defncopy` is no longer a valid way to check the EBF number for 64-bit products. Instead, use the UNIX strings and `grep` commands to confirm the EBF numbers for both Open Client and Open Server. For example, to find the string containing the EBF number in the `libsybct64.a` library, enter:

```
strings -a libsybct64.a | grep Sybase
```

This returns a string similar to:

```
Sybase Client-Library/15.5/P/DRV.15.5.0/SPARC/Solaris  
8/BUILD1550-001/64bit/OPT/Mon Aug 10 23:04:17 2009
```

To find the string containing the EBF number in the `libsybsrv64.a` library, enter:

```
strings -a libsybsrv64.a | grep Sybase
```

This returns a string similar to:

```
Sybase Server-Library/15.5/P/DRV.15.5.0/SPARC/Solaris  
8/BUILD1550-001/64bit/OPT/Mon Aug 10 23:06:27 2009
```

See also:

- *Reference Manual: Commands* – `create`, `select`
- *Reference Manual: Procedures* – `sp_addlanguage`, `sp_checkreswords`, `sp_configure`, `sp_procqmode`, `sp_remap`

Permissions

- You must have `select` permission on the `sysobjects` and `syscomments` tables to copy out definitions; you do not need permission on the object itself.
- You may not have `select` permission on the `text` column of the `syscomments` table if the system security officer has reset the `allow select on syscomments.text` column parameter with the system procedure `sp_configure`. This reset restricts `select` permission to the object owner and the system administrator. This restriction is required in order to run SAP ASE in the **evaluated configuration**, as described in the installation and configuration documentation for your platform. In this case, the object owner or a system administrator must execute `defncopy` to copy out definitions.

i Note

If the text has been encrypted, it may be hidden from you even if you have all the required permissions. See “Verifying and Encrypting Source Text” in the *Transact-SQL User’s Guide*.

- You must have the appropriate `create` permission for the type of object you are copying in. Objects copied in belong to the copier. A system administrator copying in definitions on behalf of a user must log in as that user to give the user proper access to the reconstructed database objects.

Tables used

`syscomments`, `sysobjects`

Related Information

[langinstall \[page 121\]](#)

[Threaded Versions of Utilities \[page 9\]](#)

[Database Creation and Manipulation Utilities \[page 11\]](#)

2.15 dscp

(UNIX only) A text-based utility that allows you to view and edit server entries in the `interfaces` file from the command line in UNIX platforms.

The utility is located in `$SYBASE/$SYBASE_OCS/bin`.

Set the SYBASE environment variable to the location of the current version of SAP ASE before using `dscp`.

Syntax

```
dscp [-p]
```

or:

```
dscp -v
```

To exit from dscp:

```
quit
```

or:

```
exit
```

Parameters

-p

suppresses command-line prompts.

-v

displays the version and copyright message of dscp and returns to the operating system.

Examples

Suppress command line prompt

Opens the default interfaces file for editing and suppresses the command line prompt:

```
dscp -p
```

Usage

You can perform various functions by entering commands at the dscp prompt:

- `add <servername>` – adds server entry `<servername>` in the current session. dscp prompts you for information about `<servername>`. Press Return to accept the default value, which is shown in square brackets []. Enter “#done” to exit add mode.
- `addattr <servername>` – adds an attribute to the server entry `<servername>` in the current session.
- `close [<sess>]` – closes a session identified by the `<sess>` number. If you do not specify `<sess>`, closes the current session.

- `config` – displays configuration information related to your Sybase environment.
- `copy <name1> to {<name2> | <sess> | <sess name2>}` – copies server entry `<name1>` in the current session to:
 - Server entry `<name2>` in the current session,
 - Session `<sess>`, or
 - Server entry `<name2 in session sess>`.
- `copyall to <sess>` – copies all server entries in the current session to session `<sess>`.
- `del <servername>` – deletes server entry `<servername>` in the current session.
- `delete-all` – deletes all server entries in the current session.
- `exit` – exits `dscp`.
- `help, ?, h` – displays the online help.
- `list [all]` – lists the server entries for the current session. To list the names of the entries, use the `list` command. To list the attributes for each entry, use the `list all` command.
- `mod <servername>` – modifies server entry `<servername>` in the current session. `dscp` prompts you for information about `<servername>`. Press Return to accept the default value, which is shown in square brackets []. Enter “#done” to exit modify mode.
- `open [<dsname>]` – opens a session for the specified directory service, where `<dsname>` is the directory service name. If you do not specify a value for `<dsname>`, this command opens a session for the default directory service. To open a session, specify the value “InterfacesDriver” for `<dsname>`.
- `quit` – exits `dscp`.
- `read <servername>` – displays the contents of server entry `<servername>`.
- `sess` – lists all open sessions.
- `[switch] <sess>` – makes session number `<sess>` the current session.

Related Information

[View and Edit Server Entries Using dscp \(UNIX\) \[page 255\]](#)

[dsedit \[page 95\]](#)

[Threaded Versions of Utilities \[page 9\]](#)

[Installation or Configuration Utilities \[page 9\]](#)

2.16 dsedit

The `dsedit` utility allows you to view and edit server entries in the `interfaces` file using a GUI. In Windows, `dsedit` creates and modifies network connection information in the `interfaces` file.

The utility is located in:

- (UNIX) `$$SYBASE/$SYBASE_OCS/bin`.
- (Windows) `%SYBASE%\%SYBASE_OCS%\bin`, as `dsedit.exe`.

Syntax

```
dsedit
```

or:

```
dsedit -v
```

Parameters

-v

displays the version and copyright message of `dsedit`.

Usage

- Set the SYBASE environment variable to the location of the current version of SAP ASE before using `dsedit`.
- Set the DISPLAY environment variable before invoking `dsedit`, unless you are only using the `-v` parameter to display the version number.

Related Information

[View and Edit Server Entries using dsedit \[page 264\]](#)

[dscp \[page 93\]](#)

[Installation or Configuration Utilities \[page 9\]](#)

[Using dsedit in UNIX \[page 265\]](#)

[Using dsedit in Windows \[page 270\]](#)

2.17 extractjava

Copies a retained JAR and the classes it contains from an SAP ASE server into a client file.

The utility is located in:

- (UNIX) `$$SYBASE/$SYBASE_OCS/bin`.
- (Windows) `%SYBASE%\%SYBASE_OCS%\bin, as extrjava.exe.`

Syntax

```
extractjava (extrjava in Windows)
  -j <jar_name>
  -f <file_name>
  [-a <display_charset>]
  [-D <database_name>]
  [-I <interfaces_file>]
  [-J <client_charset>]
  [-P <password>]
  [-S <server_name>]
  [-t <timeout>]
  [-U <user_name>]
  [-v]
  [-z <language>]
```

or:

```
extractjava -v
```

Parameters

-a <display_charset>

allows you to use `extractjava` from a machine where the character set differs that of the server. Use `-a` in conjunction with `-J` to specify the character set translation file (`.xlt` file) required for the conversion. Use `-a` without `-J` only if the client character set is the same as the default character set.

-D <database_name>

specifies the name of the database in which to install the JAR. If you omit the `-D` flag, or if you specify the `-D` flag with no parameter, the user's default database is used.

-f <file_name>

specifies the name of the client file that is the target of the transfer.

-I <interfaces_file>

specifies the name and location of the interfaces file to search when connecting to a SAP ASE server. If you omit the `-I` flag and parameter, or if you specify the `-I` flag with no parameter, the interfaces file in the directory designated by your SYBASE environment variable is used.

-j <jar_name>

specifies the name assigned to the retained JAR in the database that is the source of the transfer.

-J <client_charset>

specifies the character set to use on the client. `extractjava` uses a filter to convert input between `<client_charset>` and the SAP ASE character set.

`-J <client_charset>` requests that the SAP ASE server convert to and from `<client_charset>`, the character set used on the client.

-J with no argument disables character set conversion. Use this if the client and server use the same character set.

Omitting -J sets the character set to a default for the platform, which may not necessarily be the character set that the client is using. See the *System Administration Guide* for more information about character sets and associated flags.

-P <password>

specifies an SAP ASE password. If you omit the -P flag and parameter, `extractjava` prompts for a password. If you specify the -P flag with no password, the null password is used.

-S <server_name>

specifies the name of the server.

-t <timeout>

specifies the number of seconds before a SQL command times out. If you do not specify a timeout, the command runs indefinitely. This affects commands issued from within `extractjava`, not the connection time. The default timeout for logging into `extractjava` is 60 seconds.

-U <user_name>

specifies an SAP ASE login name. If you omit the -U flag and parameter, or if you specify the -U flag with no parameter, the SAP ASE server uses the current user's operating system login name.

-v

prints the version number and copyright message for `extractjava` and then exits.

-z <language>

specifies the name of an alternate language for displaying `extractjava` prompts and messages. Without the -z flag, `extractjava` uses the server's default language. Add languages to an SAP ASE during installation or afterward, using the `langinstall` utility or the `sp_addlanguage` stored procedure.

Examples

Download classes

Downloads the classes associated with the employees JAR to the client file `newaddr.jar`.

- On UNIX:

```
extractjava -j employees -f '/home/usera/jars/addr.jar' -new
```

- On Windows:

```
extrjava -j employees -f '\home\usera\jars\addr.jar' -new
```

Usage

- Set the SYBASE environment variable to the location of the current version of SAP ASE before you use `extractjava`.
- If the target client file already exists, `extractjava` overwrites its contents.
- You can write parameter flags `-f`, `-j`, `-S`, `-U`, `-P`, `-D`, and `-I` with or without a space between the flag letter and the following parameter.
- When you execute `extractjava`, an exclusive lock is placed on `sysxtypes`.
- Specifying `-jar` places an exclusive table lock on `sysjars`.

See also:

- *Java in Adaptive Server Enterprise*
- *Reference Manual: Commands* – `remove java`
- *Reference Manual: Procedures* – `sp_helpjava`

Permissions

You need to be a system administrator or database owner to use `extractjava`.

Tables used

`sysjars`, `sysxtypes`

Related Information

[installjava \[page 99\]](#)

[langinstall \[page 121\]](#)

[Database Creation and Manipulation Utilities \[page 11\]](#)

2.18 installjava

Installs a JAR from a client file into an SAP ASE server.

The utility is located in:

- (UNIX) `$$SYBASE/$SYBASE_OCS/bin`.
- (Windows) `%SYBASE%\%SYBASE_OCS%\bin as instjava.exe`.

Syntax

```
installjava
  -f <file_name>
  [ -new | -update ]
  [ -a <display_charset> ]
  [ -D <database_name> ]
  [ -I <interfaces_file> ]
  [ -J <client_charset> ]
  [ -j <jar_name> ]
  [ -P <password> ]
  [ -S <server_name> ]
  [ -t <timeout> ]
  [ -U <user_name> ]
  [ -v]
  [ -z <language> ]
```

Or

```
installjava -v
```

Parameters

-a <display_charset>

allows you to use `installjava` from a machine where the character set differs that of the server. Use `-a` in conjunction with `-J` to specify the character set translation file (`.xlt` file) required for the conversion. Use `-a` without `-J` only if the client character set is the same as the default character set.

-D <database_name>

is the name of the database in which to install the JAR. If you omit the `-D` flag, or if you specify the `-D` flag with no parameter, the user's default database is used.

-f <file_name>

is the name of the source file containing the classes to be installed in the database.

-I <interfaces_file>

is the name and location of the interfaces file to search when connecting to the SAP ASE server. If you omit the `-I` flag and parameter, or if you specify the `-I` flag with no parameter, the interfaces file in the directory designated by your SYBASE environment variable is used.

-J <client_charset>

specifies the character set to use on the client. `installjava` uses a filter to convert input between `<client_charset>` and the SAP ASE character set.

`-J <client_charset>` requests that the SAP ASE server convert to and from `<client_charset>`, the character set used on the client.

`-J` with no argument disables character set conversion. Use this if the client and server use the same character set.

Omitting `-J` sets the character set to a default for the platform, which may not necessarily be the character set that the client is using. See the *System Administration Guide* for more information about character sets and associated flags.

`-j <jar_name>`

is the name of the JAR containing the classes to be installed in the database. Indicates that the JAR file should be saved in the database and associated with the classes it contains.

`-new` | `-update`

specifies whether the classes in the file already exist in the database. If you specify:

- `-new` – you cannot install a class with the same name as an existing class
- `-update` – install a class with the same name as an existing class, and the newly installed class replaces the existing class

`-P <password>`

is an SAP ASE password. If you omit the `-P` flag and parameter, `installjava` prompts for a password. If you specify the `-P` flag with no password, the null password is used.

`-S <server_name>`

is the name of the server.

`-t <timeout>`

specifies the number of seconds before a SQL command times out. If you do not specify a timeout, the command runs indefinitely. This affects commands issued from within `installjava`, not the connection time. The default timeout for logging into `installjava` is 60 seconds.

`-U <user_name>`

is an SAP ASE login name. If you omit the `-U` flag and parameter, or if you specify the `-U` flag with no parameter, the SAP ASE server uses the current user's operating system login name.

`-v`

prints the version number and copyright message for `installjava` and then exits.

`-z <language>`

is the name of an alternate language for displaying `installjava` prompts and messages. Without the `-z` flag, `installjava` uses the server's default language. Add languages to an SAP ASE during installation or afterward, using the `langinstall` utility or the `sp_addlanguage` stored procedure.

Examples

Install

Installs `addr.jar` and its classes, but does not retain the association between the JAR and classes:

```
installjava -f '/home/usera/jars/addr.jar' -new
```

In Windows:

```
instjava -f '\home\usera\jars\addr.jar' -new
```

Reinstall

Reinstalls `addr.jar` and associates its classes with the `employees` JAR name:

```
installjava -f '/home/usera/jars/addr.jar' -update -j employees
```

In Windows:

```
instjava -f '\home\usera\jars\addr.jar' -update -j employees
```

Permissions

You need to be a system administrator or database owner to use `installjava`.

Auditing

Information	Values
Audit option	<code>install</code>
Event	93
Command or access audited	<code>installjava</code>
Information in <code>extrainfo</code>	<ul style="list-style-type: none">• <i>Roles</i> – current active roles• <i>Keywords or options</i> – NULL• <i>Previous value</i> – NULL• <i>Current value</i> – NULL• <i>Other information</i> – NULL• <i>Proxy information</i> – original login name, if <code>set proxy</code> is in effect

Tables used

`sysjars`, `sysxtypes`

Related Information

[extractjava](#) [page 96]

2.18.1 Usage for installjava

There are additional considerations when using `installjava`.

- Set the SYBASE environment variable to the location of the current version of SAP ASE before you can use `installjava`.
- Any user can reference installed classes.
- You can write the `-f`, `-j`, `-s`, `-U`, `-P`, `-D`, and `-I` parameter flags with or without a space between the flag letter and the following parameter.

See also:

- *Java in Adaptive Server Enterprise*
- *Reference Manual: Commands – remove java*
- *Reference Manual: Procedures – sp_helpjava*

2.18.1.1 Cases When Adding New JARs Causes Exceptions

An exception is raised under some conditions.

- You use `-new` with the `-j <jar_name>` option and a JAR of that name already exists in the database.
- Any classes of the same name as those in the source JAR already exist in the database, an exception is raised.

2.18.1.2 Updating JARs and Classes

If you alter a class used as a column datatype by reinstalling a modified version of the class, make sure that the modified class can read and use existing objects (rows) in tables using that class as a datatype. Otherwise, you may be unable to access those objects without reinstalling the class.

If you use `-update`:

- With the `-j <jar_name>` option:
 - All classes in the database associated with the target JAR are deleted from the database and the classes in the source JAR file installed in their place.
 - If a class in the source JAR file is already installed in the database but is not attached to a JAR, the class in the source JAR is installed in the database and the unattached class is deleted.
- Without the `-j <jar_name>` option:
 - Classes in the source JAR file replace unattached classes of the same name.
 - Classes in the source JAR that do not correspond to an installed class are installed as unattached classes in the database.

If you install a new JAR with a replacement for an installed class that is referenced by a SQLJ procedure or function, make sure that the newly installed class has a valid signature for the SQLJ routine. If the signature is invalid, an exception is raised when the SQLJ routine is invoked.

2.18.1.3 Locks

Using `installjava` causes some locks to occur.

- When you execute `installjava`, an exclusive lock is placed on `sysxtypes`.
- If `-j <jar_name>` is specified, an exclusive table lock is placed on `sysjars`.

2.19 isql

Interactive SQL parser to the SAP ASE server.

The utility is located in:

- (UNIX) `$$SYBASE/$SYBASE_OCS/bin`.
- (Windows) `%SYBASE%\%SYBASE_OCS%\bin, as isql.exe`.

Syntax

```
isql [-b] [-e] [-F] [-n] [-p] [-v] [-W] [-X] [-Y] [-Q]
      [-a <display_charset>]
      [-A <packet_size>]
      [-c <cmdend>]
      [-D <database>]
      [-E <editor>]
      [-h <header>]
      [-H <hostname>]
      [-i <inputfile>]
      [-I <interfaces_file>]
      [-J <client_charset>]
      [-K <keytab_file>]
      [-k <secure_store_key>]
      [-l <login_timeout>]
      [-m <errorlevel>]
      [-M <LabelName> <LabelValue>]
      [-o <outputfile>]
      [-P <password>]
      [-R <remote_server_principal>]
      [-s <col_separator>]
      [-S <server_name>]
      [-t <timeout>]
      [-U <username>] [-v]
      [-V [<security_options>]]
      [-w <column-width>]
      [-x <trusted.txt_file>]
      [-y <sybase_directory>]
      [-z <localename>]
```



```

[-Z <security_mechanism>]
[--appname "<application_name>"]
[--command_encryption]
[--conceal [':?' | '<wildcard>']]
[--help]
[--history [p]<history_length> [--history_file <history_filename>]]
[--retservererror]
[--URP <remotepassword>]

```

Parameters

-a <display_charset>

allows you to run `isql` from a terminal where the character set differs from that of the machine on which `isql` is running. Use `-a` with `-J` to specify the character set translation file (`.xlt` file) required for the conversion. Use `-a` without `-J` only if the client character set is the same as the default character set.

i Note

The `ascii_7` character set is compatible with all character sets. If either the SAP ASE character set or the client character set is set to `ascii_7`, any 7-bit ASCII character can pass unaltered between client and server. Other characters produce conversion errors. For more information on character set conversion, see the *System Administration Guide*.

-A <packet_size>

specifies the network packet size to use for this `isql` session. For example, to set the packet size to 4096 bytes for the `isql` session, use:

```
isql -A 4096
```

To check your network packet size, use:

```
select * from sysprocesses
```

The value appears under the `network_pktsz` heading.

`<packet_size>` must be between the values of the default network packet size and maximum network packet size configuration variables, and must be a multiple of 512. The default value is 2048.

Use larger-than-default packet sizes to perform I/O-intensive operations, such as `readtext` or `writetext` operations. Setting or changing the SAP ASE packet size does not affect remote procedure calls' packet size.

-b

disables the display of the table headers output.

-c <cmdend>

changes the command terminator. By default, you terminate commands and send them to the server by typing "go" on a line by itself. When you change the command terminator, do not use SQL reserved words or control characters.

-D <database>

selects the database in which the `isql` session begins.

-e

echoes input.

-E <editor>

specifies an editor other than the default editor `vi`. To invoke the editor, enter its name as the first word of a line in `isql`.

-F

enables the FIPS flagger. When you specify the `-F` parameter, the server returns a message when it encounters a nonstandard SQL command. This option does not disable SQL extensions. Processing completes when you issue the non-ANSI SQL command.

-h <headers>

specifies the number of rows to print between column headings. The default prints headings only once for each set of query results.

-H <hostname>

sets the client host name.

-i <inputfile>

specifies the name of the operating system file to use for input to `isql`. The file must contain command terminators (the default is "go").

- Specifying the parameter is equivalent to `< <inputfile>`:

```
-i <inputfile>
```

- If you use `-i` and do not specify your password on the command line, `isql` prompts you for it.
- If you use `< <inputfile>` and do not specify your password on the command line, specify your password as the first line of the input file.

-I <interfaces_file>

specifies the name and location of the interfaces file to search when connecting to the SAP ASE server. If you do not specify `-I`, `isql` looks for a file named `interfaces` in the directory specified by your SYBASE environment variable.

-J <client_charset>

specifies the character set to use on the client. The parameter requests that the SAP ASE server convert to and from `<client_charset>`, the character set used on the client. A filter converts input between `<client_charset>` and the SAP ASE character set.

`-J` with no argument sets character set conversion to NULL. No conversion takes place. Use this if the client and server use the same character set.

Omitting `-J` sets the character set to a default for the platform. The default may not necessarily be the character set that the client is using. For more information about character sets and the associated flags, see *Configuring Client/Server Character Set Conversions*, in the *System Administration Guide, Volume One*.

-K <keytab_file>

(used only with Kerberos security) specifies a Kerberos keytab file that contains the security key for the user name specified with the -U option. To create a keytab, see your Kerberos documentation. If you do not specify the -K option, the `isql` user must be logged in to Kerberos with the same user name as specified with the -U option.

-k <secure_store_key>

specifies the secure store key that contains the client's credentials and server connection information, such as username, password, hostname, and port number of the server. Instead of entering the username and password, you need to provide the key to connect to the SAP ASE server.

-l <login_timeout>

specifies the maximum timeout value allowed when connecting to the SAP ASE server. The default is 60 seconds. This value affects only the time that `isql` waits for the server to respond to a login attempt. To specify a timeout period for command processing, use the `-t<timeout>` parameter.

-m <errorlevel>

customizes error message appearance. For errors of the severity level specified or higher, only the message number, state, and error level appear; no error text appears. For error levels lower than the specified level, nothing appears.

-M <LabelName> <LabelValue>

(Secure SQL Server only) enables multilevel users to set the session labels for the this `isql` session. Valid values for `<LabelName>` are:

- `curread` (current read level) – is the initial level of data that you can read during this session. `curread` must dominate `curwrite`.
- `curwrite` (current write level) – is the initial sensitivity level that is applied to any data that you write during this session.
- `maxread` (maximum read level) – is the maximum level at which you can read data. This is the upper bound to which you as a multilevel user can set `curread` during the session. `maxread` must dominate `maxwrite`.
- `maxwrite` (maximum write level) – is the maximum level at which you can write data. This is the upper bound to which you as a multilevel user can set `curwrite` during a session. `maxwrite` must dominate `minwrite` and `curwrite`.
- `minwrite` (minimum write level) – is the minimum level at which you can write data. This is the lower bound to which you as a multilevel user can set `curwrite` during a session. `minwrite` must be dominated by `maxwrite` and `curwrite`.

`<LabelValue>` is the actual value of the label, expressed in the human-readable format used on your system (for example, "Company Confidential Personnel").

-n

removes numbering and the prompt symbol (`>`) from the echoed input lines in the output file when used with `-e`.

-o <outputfile>

specifies the name of an operating system file to store the output from `isql`. Specifying the parameter as `-o <outputfile>` is similar to `> <outputfile>`

-p

prints performance statistics.

-P <password>

specifies your SAP ASE password. If you do not specify the `-P` flag, `isql` prompts for a password. If your password is NULL, use the `-P` flag without any password.

-Q

provides clients with failover property. See *Using Sybase Failover in a High Availability System*.

-R <remote_server_principal>

specifies the principal name for the server as defined to the security mechanism. By default, a server's principal name matches the server's network name (which is specified with the `-s` parameter or the DSQUERY environment variable). Use the `-R` parameter when the server's principal name and network name are not the same.

-s <colseparator>

resets the column separator character, which is blank by default. To use characters that have special meaning to the operating system (for example, "|", ";", "&", "<", ">"), enclose them in quotes or precede them with a backslash.

The column separator appears at the beginning and the end of each column of each row.

-S <server_name>

specifies the name of the SAP ASE server to which to connect. `isql` looks this name up in the interfaces file. If you specify `-S` without `<server_name>`, `isql` looks for a server named SYBASE. If you do not specify `-S`, `isql` looks for the server specified by your DSQUERY environment variable.

-t <timeout>

specifies the number of seconds before a SQL command times out. If you do not specify a timeout, the command runs indefinitely. This affects commands issued from within `isql`, not the connection time. The default timeout for logging into `isql` is 60 seconds.

-U <username>

specifies a login name. Login names are case-sensitive.

-v

prints the version and copyright message of `isql` and then exits.

`isql` is available in both 32-bit and 64-bit versions. They both reside in the same directory and are differentiated by their executable file names (`isql` and `isql64`). Enter `isql -v` or `isql64 -v` to see the detailed version string of the `isql` you are using.

-V <security_options>

specifies network-based user authentication. With this option, the user must log in to the network's security system before running the utility, and users must supply the network user name with the `-U` option; any password supplied with the `-P` option is ignored.

Follow `-v` with a `<security_options>` string of key-letter options to enable additional security services. These key letters are:

- `c` – enables data confidentiality service.
- `d` – enables credential delegation and forwards the client credentials to the gateway application.
- `i` – enables data integrity service.
- `m` – enables mutual authentication for connection establishment.
- `o` – enables data origin stamping service.
- `q` – enables out-of-sequence detection
- `r` – enables data replay detection

-W

disables both extended password and password encrypted negotiations.

-w <columnwidth>

sets the screen width for output. The default is 80 characters. When an output line reaches its maximum screen width, it breaks into multiple lines.

-x <trusted.txt_file>

specifies an alternate `trusted.txt` file.

-X

initiates the login connection to the server with client-side password encryption. `isql` (the client) specifies to the server that password encryption is desired. The server sends back an encryption key, which `isql` uses to encrypt your password, and the server uses the key to authenticate your password when it arrives.

This option can result in normal or extended password encryption, depending on connection property settings at the server. If `CS_SEC_ENCRYPTION` is set to `CS_TRUE`, normal password encryption is used. If `CS_SEC_EXTENDED_ENCRYPTION` is set to `CS_TRUE`, extended password encryption is used. If both `CS_SEC_ENCRYPTION` and `CS_SEC_EXTENDED_ENCRYPTION` are set to `CS_TRUE`, extended password encryption takes precedence.

If `isql` fails, the system creates a core file that contains your password. If you did not use the encryption option, the password appears in plain text in the file. If you used the encryption option, your password is not readable.

For details on encrypted passwords, see the user documentation for the Open Client Client-Library.

-y <sybase_directory>

sets an alternate Sybase home directory.

-Y

tells the SAP ASE server to use chained transactions.

-z <locale_name>

specifies the official name of an alternate language to display `isql` prompts and messages. Without `-z`, `isql` uses the server's default language. Add languages to an SAP ASE server during installation or afterward, using the `langinstall` utility (`langinst` in Windows) or the `sp_addlanguage` stored procedure.

-Z <security_mechanism>

specifies the name of a security mechanism to use on the connection.

Security mechanism names are defined in the `libtcl.cfg` configuration file located in the `ini` subdirectory below the Sybase installation directory. If no `<security_mechanism>` name is supplied, the default mechanism is used. For more information on security mechanism names, see the description of the `libtcl.cfg` file in the *Open Client and Open Server Configuration Guide*.

--appname "`<application_name>`"

allows you to change the default application name `isql` to the `isql` client application name. This simplifies:

- Testing of SAP ASE cluster routing rules for incoming client connections based on the client application name.
- Switching between alternative settings for `isql` in `$SYBASE/$SYBASE_OCS/config/ocs.cfg`, such as between debugging and normal sessions.
- Identification of the script that started a particular `isql` session from within an SAP ASE server.

`<application_name>`:

- Is the client application name. You can retrieve the client application name from `sysprocesses.program_name` after connecting to your host server.
- Has a maximum length of 30 characters. You must enclose the entire application name in single quote or double quote characters if it contains any white spaces that do not use the backslash escape character. You can set the `<application_name>` to an empty string.

i Note

You can also set the client application name in `ocs.cfg` using the `CS_APPNAME` property.

--command_encryption

encrypts every command during an `isql` session.

--conceal [`[':?' | '<wildcard>']`]

hides and encrypts your input during an `isql` session. The `--conceal` option is useful when a user needs to enter sensitive information, such as passwords.

`<wildcard>`, a 32-byte variable, specifies the character string that triggers `isql` to prompt you for input during an `isql` session. For every wildcard that `isql` reads, it displays a prompt that accepts your input but does not echo the input to the screen. The default wildcard is `:?`.

i Note

`--conceal` is silently ignored in batch mode.

--help

displays a brief description of syntax and usage for the `isql` utility consisting of a list of available arguments.

--history [`[p]<history_length> [--history_file <history_filename>]`]

Loads the contents of the command history log file, if it exists, when `isql` starts. By default, the command history feature is off. Use the `--history` command line option to activate it.

- `p` – indicates command history persistence; in-memory command history is saved to disk when `isql` shuts down. If you do not use the `p` option, the command history log is deleted after its contents are loaded into memory.
- `<history_length>` – this parameter, which is required if you use `--history`, is the number of commands that `isql` can store in the command history log. The maximum value of `<history_length>` is 1024; if a larger value is specified, `isql` silently truncates it to 1024.
- `-history_file <history_filename>` – indicates that `isql` must retrieve the command history log from `<history_filename>`. If `p` is specified, `isql` also uses `<history_filename>` to store the current session's command history. `<history_filename>` can include an absolute or a relative path to the log file. A relative path is based on the current directory. If you do not indicate a path, the history log is saved in the current directory. When `--history_file` is not specified, `isql` uses the default log file in `$HOME/.sybase/isql/isqlCmdHistory.log`.

--retservererror

forces `isql` to terminate and return a failure code when it encounters a server error with a severity greater than 10. When `isql` encounters this type of abnormal termination, it writes the label "Msg" together with the actual SAP ASE error number to `stderr`, and returns a value of 2 to the calling program. `isql` prints the full server error message to `stdout`.

--URP <remotepassword>

enables setting the universal remote password `<remotepassword>` for clients accessing an SAP ASE server.

Examples

Query edit

Opens a text editor where you can edit the query. When you write and save the file, you are returned to `isql`. The query appears; type "go" on a line by itself to execute it:

```
isql -Ujoe -Pabracadabra
1> select *
2> from authors
3> where city = "Oakland"
4> vi
```

Clearing and quitting

`reset` clears the query buffer, and `quit` returns you to the operating system:

```
isql -Ualma
Password:
1> select *
2> from authors
```

```
3> where city = "Oakland"
4> reset
1> quit
```

Column separators

Creates column separators using the “#” character in the output in the `pubs2` database for store ID 7896:

```
isql -Usa -P -s#
1> use pubs2
2> go
1> select * from sales where stor_id = "7896"
```

```
#stor_id#ord_num          #date          #
#-----#-----#-----#
#7896   #124152          #      Aug 14 1986 12:00AM#
#7896   #234518          #      Feb 14 1991 12:00AM#
(2 rows affected)
```

Credentials

(MIT Kerberos) Requests credential delegation and forwards the client credentials to MY_GATEWAY:

```
isql -Vd -SMY_GATEWAY
```

Passwords

Changes password without displaying the password entered. This example uses “old” and “new” as prompt labels:

```
$ isql -Uguest -Pguest -Smyase --conceal
sp_password
:? old
,
:?:? new
-----
old
new
Confirm new
Password correctly set.
(Return status 0)
```

Hide input

In this example of `--conceal`, the password is modified without displaying the password entered. This example uses “old” and “new” as prompt labels:

```
$ isql -Uguest -Pguest -Smyase --conceal
1> sp_password
2> :? old
3> ,
4> :?:? new
5> go
old
new
Confirm new
Password correctly set.
(return status = 0)
```

In this example of `--conceal`, the password is modified without displaying the password entered. This example uses the default wildcard as the prompt label:

```
$ isql -Uguest -Pguest -Smyase --conceal
```



```

1> sp_password
2> :?
3> ,
4> :?:?
5> go
:?
:?
Confirm :?
Password correctly set.
(return status = 0)

```

This example of `--conceal` uses a custom wildcard, and the prompt labels "role" and "password" to activate a role for the current user:

```

$ isql -UmyAccount --conceal '*'
Password:
1> set role
2> * role
3> with passwd
4> ** password
5> on
6> go
role
password
Confirm password
1>

```

Return server error

returns 2 to the calling shell, prints "Msg 207" to `stderr`, and exits, when it encountered a server error of severity 16:

```

guest> isql -Uguest -Pguestpwd -SmyASE --retservererror
2> isql.stderr
1> select no_column from sysobjects
2> go
Msg 207, Level 16, State 4:
Server 'myASE', Line 1:
Invalid column name 'no_column'.
guest> echo $?
2
guest> cat isql.stderr
Msg 207
guest >

```

Application name

Sets the application name to the name of the script that started the `isql` session:

```
isql --appname $0
```

History

Loads and saves the command history using the default log file:

```
isql -Uguest -Ppassword -Smyase --history p1024
```

Run isql with configuration file

This sample `ocs.cfg` file allows you to run `isql` normally or with network debug information. Because the configuration file is read and interpreted after the command line parameters are read and interpreted, setting `CS_APPNAME` to `isql` sets the application name back to `isql`:

```
;Sample ocs.cfg file
```

```
[DEFAULT]
;place holder
[isql]
;place holder
[isql_dbg_net]
CS_DEBUG = CS_DBG_NETWORK
CS_APPNAME = "isql"
```

To run `isql` normally:

```
isql -Uguest
```

To run `isql` with network debug information:

```
isql -Uguest --appname isql_dbg_net
```

Load and save command history

Loads and saves the command history using the default log file:

```
isql -Uguest -Ppassword -Smyase --history p1024
```

Delete log

Deletes `myaseHistory.log` after loading its contents to memory. The session's command history is not stored.

```
isql -Uguest -Ppassword -Smyase --history 1024
--history_file myaseHistory.log
```

All commands in command history

Lists all the commands stored in the command history:

```
isql -Uguest -Ppassword -Smyase --history p1024
1> h
[1] select @@version
[2] select db_name()
[3] select @@servername
1>
```

Most recent commands

Lists the two most recent commands issued:

```
isql -Uguest -Ppassword -Smyase --history p1024
1> h -2
[2] select db_name()
[3] select @@servername
1>
```

Recall labeled command from history

Recalls the command labeled 1 from the command history:

```
isql -Uguest -Ppassword -Smyase --history p1024
1> ? 1
1> select @@version
2>
```

Recall last-issued command from history

Recalls the latest issued command from the command history:

```
isql -Uguest -Ppassword -Smyase --history p1024
1> ? -1
1> select @@servername
2>
```

Set directory

Sets an alternate Sybase home directory using the `-y` option:

```
isql -y/work/NewSybase -User1 -Psecret -SMYSERVER
```

Roles

Activates a role for the current user. This example uses a custom wildcard and the prompt labels "role" and "password":

```
$ isql -UmyAccount --conceal '*'Password:
set role
* role
with passwd
** password
on
go
role
password
Confirm password
```

Application name

Sets the application name to "isql Session 01":

```
isql -UmyAccount -SmyServer --appname "isql Session 01"
Password:
1>select program_name from sysprocesses
2>where spid=@@spid
3>go
program_name
-----
isql Session 01
```

Deleting history

Deletes `myaseHistory.log` after loading its contents to memory. The session's command history is not stored:

```
isql -Uguest -Ppassword -Smyase --history 1024
--history_file myaseHistory.log
```

Connecting to the SAP ASE Server using secure store key

In the following example, the user-generated key, `<userkey>`, which stores the user's credentials, is provided with `isql` to connect to the SAP ASE Server.

```
isql -k <userkey>
```

Related Information

[Interactive isql Commands \[page 118\]](#)

[Command History in isql \[page 120\]](#)

[Using Interactive SQL from the Command Line \[page 278\]](#)

[Threaded Versions of Utilities \[page 9\]](#)

[Database Creation and Manipulation Utilities \[page 11\]](#)

2.19.1 Usage for isql

Additional information for using `isql`.

- If you are using Kerberos drivers, use the `isql` syntax for `isql_r`.
- If you are using threaded drivers in the IBM platform, use the standard syntax for `isql`.
- Before using `isql`, set the SYBASE environment variable to the location of the current version of Adaptive Server.
- The 5701 (“changed database”) server message is no longer appears after logging in or issuing a `use database` command.
- Error message format differs from versions of `isql` earlier than 15.7. If you have scripts that perform routines based on the values of these messages you may need to rewrite them.
- When you include the `-x` parameter, the password-enabled connection proceeds according to server capabilities:
 - If the server can handle both extended password and password encryption, extended password encryption negotiations are used.
 - If the server can handle only password encryption, password encryption negotiations are used.
 - If the server cannot handle password encryption or extended password encryption, the first connection attempt fails and the client attempts to reconnect using a plain text password.
- Terminate a command by typing a line beginning with the default command terminator `go` or another command terminator, if the `-c` parameter is used. Follow the command terminator with an integer to specify the number of times to run the command. For example, to execute this command 100 times, type:

```
select x = 1
go 100
```

The results appear once at the end of execution.

- If you enter an option more than once on the command line, `isql` uses the last value. For example, if you enter this command, “send”, the second value for `-c`, overrides “.”, the first value:

```
isql -c"." -csend
```

This enables you to override any aliases you set up.

- Execute operating system commands by starting a line with two exclamation points (!!) followed by the command.
- To clear the existing query buffer, type `reset` on a line by itself. `isql` discards any pending input. Press `Ctrl+c` anywhere on a line to cancel the current query and return to the `isql` prompt.

- Read in an operating system file containing a query for execution by `isql`:

```
isql -U alma -P<password> < <input_file>
```

The file must include a command terminator. The results appear on your terminal. Read in an operating system file containing a query and direct the results to another file:

```
isql -U alma -P<password> < <input_file> > <output_file>
```

- `isql` displays only six digits of `float` or `real` data after the decimal point, rounding off the remainder.
- You can include comments in a Transact-SQL statement submitted to the SAP ASE server by `isql`. Open a comment with “/*”. Close it with “*/”, as shown in this example:

```
select au_lname, au_fname
/*retrievẽ authors' last and first names*/
from authors, titles, titleauthor
where authors.au_id = titleauthor.au_id
and titles.title_id = titleauthor.title_id
/*this is a three-way join that links authors
**to the books they have written.*/
```

Do not comment out a `go` command at the beginning of a line. For example, use this to comment out the `go` command:

```
/*
**go
*/
```

Do not use this:

```
/*
go
*/
```

- `isql` defines the order of the date format as month, date, and year (mm dd yyyy hh:mmAM (or PM)), regardless of the locale environment. To change this default order, use the `convert` function.
- In an `isql` session, the default prompt label is either the default wildcard `: ?` or the value of `<wildcard>`. Customize the prompt label by providing a one-word character string, with a maximum length of 80 characters after a wildcard. If you specify a prompt label that is more than one word, the characters after the first word are ignored.

Note

In an `isql` session, `isql` recognizes `: ?`, or the value of `<wildcard>`, as wildcards only when these characters are placed at the beginning of an `isql` line.

- The `--command_encryption` option encrypts all commands in an `isql` session. To encrypt specific commands, use the `go encrypt` command terminator. See *Command-Level Encryption* in the *Security Administration Guide*.

See also:

- *Reference Manual: Building Blocks* – `exact` numeric datatypes, `convert` built-in function
- *Reference Manual: Commands* – `create schema`, `set`
- *Reference Manual: Procedures* – `sp_addlanguage`, `sp_addremotelogin`, `sp_add_resource_limit`, `sp_bindexclass`, `sp_configure`, `sp_defaultlanguage`, `sp_droplanguage`, `sp_helplanguage`, `sp_remotoption`, `sp_serveroption`, `sp_showcontrolinfo`, `sp_unbinexclass`, `sp_volchanged`

- *Reference Manual: Configuration Parameters* – default network packet size and maximum network packet size configuration parameters

2.19.1.1 Interactive isql Commands

To use `isql` interactively, give the command `isql` (and any of the optional parameters) at your operating system prompt.

The `isql` program accepts SQL commands and sends them to the SAP ASE server. The results are formatted and printed on standard output. Exit `isql` with `quit` or `exit`.

When using `isql` interactively:

- Read an operating system file into the command buffer using:

```
:r <filename>
```

Do not include a command terminator in the file; enter the terminator interactively once you have finished editing.

- Read and display an operating system file into the command buffer using:

```
:R <filename>
```

- You can change the current database using:

```
use <databasename>
```

The commands you execute from within interactive `isql` are:

Command	Description
<code>:r <filename></code>	Reads an operating system file into the command buffer. Do not include the command terminator in the file; once you have finished editing, enter the terminator interactively on a line by itself.
<code>:R <filename></code>	Reads an operating system file into the command buffer then shows the command. Do not include the command terminator in the file; once you have finished editing, enter the terminator interactively on a line by itself.
<code>use <database_name></code>	Changes the current database.
<code>!! <os_command></code>	Executes an operating system command. Place at the start of a line.
<code>> <file_name></code>	Redirects the output of the Transact-SQL command to <code><file_name></code> . This example inserts the server version into <code><file_name></code> :

```
select @@version
go > <file_name>
```

Command	Description
<code>>> <file_name></code>	Appends the output of the Transact-SQL command to <code><file_name></code> . This example appends the server version to <code><file_name></code> : <pre>select @@version go >> <file_name></pre>
<code> command</code>	Pipes the output of the Transact-SQL command to an external command. This example finds all instances of "sa" in the listing produced by <code>sp_who</code> : <pre>sp_who go grep sa</pre>
<code>vi (UNIX) or edit (Windows)</code>	Calls the default editor.
<code>reset</code>	Clears the query buffer.
<code>quit or exit</code>	Exits <code>isql</code> .

2.19.1.2 Encrypting Commands On Demand

Use the `--command_encryption` option to encrypt all of the client commands in an `isql` session.

The example shows how to encrypt the client commands of an `isql` session:

```
isql -Uguest -Ppassword -Smypass --command_encryption
```

When on demand command encryption is supported (meaning the versions of SAP ASE and the client support on demand encryption), the client commands can also individually be encrypted in `isql` by using `go encrypt` instead of `go`.

For example:

```
1> select au_lname from authors
2> go encrypt
```

For more information, see the *Security Administration Guide > Encryption*.

2.19.1.3 Additional isql Session Commands

Additional commands to use within `isql`.

Command	Description
<code>></code>	Redirects command output to a file. File is overwritten if it exists.

Command	Description
>	Redirects command output to a file. The output is appended to the file if the file already exists.
	Pipes the output of a command to an external application.
reset	Clears the query buffer.
quit OR exit	Exits from <code>isql</code> .
vi	Calls the editor.
!! <command>	Executes an operating system command.
:r <filename>	Reads an operating system file.
:R <filename>	Reads and displays an operating system file.
use <dbname>	Changes the current database to <dbname>.

2.19.1.4 Prompt Labels and Double Wildcards in an isql Session

In an `isql` session, the default prompt label is either the default wildcard `: ?` or the value of wildcard. You can customize the prompt label by providing a one-word character string with a maximum length of 80 characters, after a wildcard.

If you specify a prompt label that is more than one word, the characters after the first word are ignored. Double wildcards such as `: ? : ?` specify that `isql` needs to prompt you twice for the same input. The second prompt requests you to confirm your first input. If you use a double wildcard, the second prompt label starts with Confirm.

i Note

In an `isql` session, `: ?` or the value of a custom wildcard is only recognized by `isql` as such, when it is the first "word" of a line.

2.19.1.5 Command History in isql

The command history feature is available in command mode.

Only commands that are issued interactively in `isql` are included in the command history. Examples of commands that are not included in the command history are those that are executed using the `-i` command line option or as part of a redirected input, such as:

```
isql -Uguest -Ppassword -Smyase --history p1024
```



```
--history_file myaseHistory.log <<EOF
exec sp_x_y_z
go
EOF
```

Command history contains the most recent commands issued in an `isql` session. When `<history_length>` is reached, `isql` drops the oldest command from the history and adds the newest command issued.

If you do not specify an alternate log file, and if the `$HOME` or `%APPDATA%` environment variable used by the default log file is not defined, an error message appears and the command history log is not saved.

In an `isql` session, use the `h [<n>]` command to display the command history. A page can display up to 24 lines of commands. If the command history contains more than 24 lines, press Enter to display the next set of commands or enter "a" to display all commands in one page. Enter "q" to return to `isql`.

`<n>` indicates the number of commands to appear. If `<n>` is:

- Positive – the commands that appear start from the oldest command in the history.
- Negative – the `<n>` most recent commands appear.

Use the `? <n> | ??` command to recall and reissue a command from the command history.

When `<n>` is positive, `isql` looks for the command labeled with the number `<n>` and loads this to the command buffer. When `n` is negative, `isql` loads the `<n>`th most recent command issued.

`??` – recalls the latest command issued and is equivalent to `? -1`.

- When a command is recalled from history, the recalled command overwrites the command in the command buffer.
- You can edit a recalled command before resubmitting the command to the server.

2.20 langinstall

Installs a new language in an SAP ASE.

The utility is located in:

- (UNIX) `$SYBASE/$SYBASE_ASE/bin`.
- (Windows) `%SYBASE%\%SYBASE_ASE%\bin`, as `langinst.exe`.

Syntax

```
langinstall
[-A <application_name>]
[-I <path>]
[-P <password>]
[-R <release_number>]
[-S <server>]
[-U <user>]
<language>
```

Or

```
langinstall -v
```

Parameters

-A <application_name>

specifies the name of a message file to be used instead of `server.loc`, and indicates that `langinstall` should install user messages for the indicated application instead of installing system messages. When you specify `-A`:

- The `-R <release_number>` command line parameter is ignored.
- Messages are installed into `master.dbo.sysusermessages`, instead of in `sysmessages`.

-I <path>

specifies the name and location of the interfaces file (`sql.ini` file in Windows) that `langinstall` searches when connecting to the SAP ASE server. If you do not specify `-I`, `langinstall` uses the interfaces file in the directory specified by the SYBASE environment variable. If it is not set, `langinstall` looks for the default SYBASE directory.

-P <password>

specifies the system administrator's ("sa" account) password. If you omit `-P`, `langinstall` prompts for the "sa" account password.

-R <release_number>

specifies the release number, in the format `<n>.<n>.<n>`, to use to upgrade messages in `master..sysmessages`. Use `-R` only in failure conditions, such as if `langinstall` (`langinst` in Windows) fails, in case of user error, or when you think that messages in `sysmessages` are out of date.

The `-R` parameter forces `langinstall` to collect messages from a release previous to the current one. `langinstall` compares the existing messages with the ones to be installed and replaces any that have changed.

For example, if the current version is 15.0 and the previous version was 12.5, and you think `sysmessages` may not be correct, include the messages from the earlier version in the `syslanguages.upgrade` column (12.5 in this case) by specifying `-R12.5`. `langinstall` then installs all messages from SAP ASE 12.5.

-S <server>

specifies the name of the SAP ASE server to which to connect. If you do not specify `-s`, `langinstall` uses the server specified by your DSQUERY environment variable. If DSQUERY is not set, `langinstall` attempts to connect to a server named SYBASE.

-U <user>

specifies a login name. Login names are case sensitive.

<language>

is the official name of the language to be installed. You must specify a language.

i Note

You cannot specify `<language>` before the `-A <application_name>` parameter.

`-v`

prints the version number and copyright message for `langinstall` and then exits.

Examples

Example 1

This example installs messages from file `$SYBASE/$SYBASE_ASE/locales/french/dsam.loc` (`%SYBASE%\%SYBASE_ASE%\locales\french\dsam.loc` in Windows):

Sample Code

```
langinstall -P<password> -A dsam french
```

Usage

The SAP ASE installation program runs `langinstall` automatically for a new installation as well as for customers who are upgrading from an earlier version.

`langinstall:`

- Adds the specified language-specific information to `master..syslanguages` using `sp_addlanguage`. If the language already exists, `langinstall` updates the appropriate row in `syslanguages`.
- Adds to, updates, and deletes error messages as necessary from `master..sysmessages`.
- Updates `syslanguages.update`, inserting the new release number.
- Validates the entries in the localization file sections that it uses. If anything is missing, `langinstall` prints an error message and does not add the language to `syslanguages`.
- Compares the version numbers of each localization file it uses, `common.loc` and `server.loc`. If they are not the same, it prints a warning message. `syslanguages.upgrade` is always set according to the version number in `server.loc`.

See also:

- *Reference Manual: Procedures* – `sp_addlanguage`, `sp_configure`, `sp_defaultlanguage`, `sp_droplanguage`, `sp_helplanguage`

Permissions

Only a system administrator using the “sa” account can run `langinstall`.

Tables used

master.dbo.syslanguages, master.dbo.sysmessages

Related Information

[defncopy \[page 88\]](#)

[srvbuild \[page 166\]](#)

[Utilities for Languages, Character Sets, and Sort Orders \[page 10\]](#)

2.21 optdiag

Displays optimizer statistics or loads updated statistics into system tables.

The utility is located in:

- (UNIX) \$SYBASE/\$SYBASE_ASE/bin.
- (Windows) %SYBASE%\%SYBASE_ASE%\bin, as optdiag.exe.

Syntax

```
optdiag [binary] [simulate] statistics
  { -i <input_file> | <database>[.<owner>[. [<table>|<prs_name>]
  [<column>] ] ] ]
  [-o <output_file>] }
  [-U< user_name>]
  [-P <password>]
  [-T <trace_value>]
  [-I <interfaces_file>]
  [-S <server>]
  [-v]
  [-h]
  [-s]
  [-z <language>]
  [-J <client_character_set>]
  [-a <display_charset>]
  [-X]
  [-k <secure_store_key>]
  [-H <hostname>]
```

Parameters

binary

extracts statistics in human-readable and binary form. When used with an input file (`-i <input_file>`), loads binary statistics into system tables.

simulate

specifies whether `optdiag` displays or loads simulated statistics. See the *Performance and Tuning Guide*.

-i <input_file>

specifies the name of the operating system file to use for `optdiag` input. Specifying an input file causes `optdiag` to update optimizer statistics for the table or column by using the values in the specified file (also called "input mode").

<database>

specifies the name of the database whose statistics you want displayed. In input mode, `optdiag` uses the database name as specified in the file, and does not accept a database name from the command line.

<owner>

specifies the name of a table owner. In:

- Display mode – if you do not specify an owner, but do specify a table name, `optdiag` displays output for all of the owners of a table.
- Input mode – `optdiag` ignores the table owner specified on the command line and uses the value in the input file.

<table>

specifies the name of the table to survey for statistics. If the command:

- Does not include an owner name or a table name – `optdiag` displays statistics for all tables in the database.
- Includes an owner name, but no table name – `optdiag` displays all of the tables that belong to the specified owner.

In input mode, `optdiag` ignores the table name specified on the command line and uses the value from the input file.

<prs_name>

indicates the name of the precomputed result set.

<column>

specifies the name of the column to survey. If the command does not include a column name, `optdiag` displays all statistics for a table.

In input mode, `optdiag` ignores the column name on the command line and uses the values from the input file.

-o <output_file>

specifies the name of an operating system file to store the output from `optdiag`. If a file with the same name already exists, `optdiag` overwrites that file without warning.

-U <user_name>

specifies an SAP ASE login name.

-P <password>

specifies your SAP ASE password. If you do not specify the `-P` flag, `optdiag` prompts for a password.

-T <trace_value>

sets trace flags for the `optdiag` session. The `optdiag` trace flags and their meanings are:

- 1 – do not stop with a warning if the `optdiag` version of SAP ASE in use does not match the SAP ASE version in the input file.
- 2 – display status message “Next table is <table_name>” when in input mode.
- 4 – skip consistency checking for step numbers while loading histograms in input mode.
- 6 – display lines of input file during input mode. This flag has no effect in display mode.
- 7 – do not stop with a warning if the `optdiag` input file does not include sampling percent information.

-I <interfaces_file>

specifies the name and location of the interfaces file to use when connecting to an SAP ASE server.

If you do not use `-I` and specify an interfaces file name, `optdiag` looks for the interfaces file (`interfaces` in UNIX), in the directory specified by the SYBASE environment variable. In Windows, `optdiag` looks for a file named `sql.ini` in the `ini` subdirectory in the Sybase installation directory (`d:\sybase`). Then, if SYBASE is not set, `optdiag` looks for the file in the default `$SYBASE` directory (`%SYBASE%` in Windows).

-S <server>

specifies the name of the SAP ASE server to which to connect. `optdiag` looks for this name in the `interfaces` file (`sql.ini` in Windows).

If you use `-S` without specifying a server name, `optdiag` looks for a server named SYBASE.

When you do not use `-S`, `optdiag` looks for the server that your DSQUERY environment variable specifies.

-v

displays the version number of and a copyright message for `optdiag` and exits.

-h

displays the `optdiag` syntax help.

-s

includes system tables in `optdiag` output. By default, only user tables are included.

-z <language>

is the official name of an alternate language that the server uses both for date formats and to display `optdiag` prompts and messages. Without the `-z` flag, `optdiag` uses the server’s default language.

Add languages to SAP ASE either during or after installation. After SAP ASE installation, use either the `langinstall` utility or the `sp_addlanguage` stored procedure to add a language.

-J <client_charset>

specifies the character set to use on the client. A filter converts input between `<client_charset>` and the SAP ASE character set.

By using `-J <client_charset>`, you request that the SAP ASE server convert data to and from `<client_charset>`, the client's character set.

By using `-J` without a character set name, you specify character set conversion as NULL; no conversion takes place. Use this `-J` alone when the client and server are using the same character set.

By omitting `-J`, you set the character set to the default set for the platform. A filter converts input between the default set and the SAP ASE character set. Keep in mind that the default may not necessarily be the character set that the client is using.

For more information about character sets and their associated flags, see the *System Administration Guide*.

-a <display_charset>

runs `optdiag` from a terminal with a character set that differs from that of the machine on which `optdiag` is running. Use `-a`:

- In conjunction with `-J` to specify the character set translation (`.xlt`) file required for the conversion.
- Without `-J` only if the client character set is the same as the default character set.

i Note

The `ascii_7` character set is compatible with all character sets. If the SAP ASE character set or the client character set is set to `ascii_7`, any 7-bit ASCII character can pass unaltered between client and server. Any other characters produce conversion errors. For more on character-set conversion, see the *System Administration Guide*.

On some Linux platforms, the `LANG` environment variable might be set by default to "en_US.UTF-8," which can cause unnecessary `LONGCHAR` conversion between the client and server. If your server and client have different charsets, we recommend that you bypass the conversion using one of these methods:

- `unsetenv LANG`
- `setenv LANG C`
- `optdiag -J`
- `optdiag -Jiso-1` (if your server uses `iso-1`)

-X

initiates the login connection to the server with client-side password encryption.

-k <secure_store_key>

specifies the secure store key that contains the client's credentials and server connection information, such as user name, password, host name, and port number of

the server. Instead of entering the user name and password, you need to provide the key to connect to the SAP ASE server.

-H <hostname>

Sets the client host name.

When used along with `-k`, `optdiag` accesses the user store within the home directory under the specified host name.

Examples

User tables

Displays statistics for all user tables in the `pubs2` database and places the output in the `pubs2.opt` file:

```
optdiag statistics pubs2 -Usa -Ppasswd -o pubs2.opt
```

Table

Displays statistics for the `titles` table:

```
optdiag statistics pubs2..titles -Usa -Ppasswd  
-o titles.opt
```

Precomputed Result Sets

Displays information for the precomputed result set `prs1`.

```
optdiag statistics prsdb..prs1 -Usa -Ppass -Sserver  
Server name:                ""  
Specified database:         "prsdb"  
Specified table owner:     not specified  
Specified table:           "prs1"  
Specified column:         not specified  
Table owner:               "dbo"  
Table name:                "prs1"  
Table type:                "precomputed result set"  
Statistics for table:      "prs1"  
. . .  
No statistics for remaining columns: "a"  
(default values used)  
Optdiag succeeded.
```

Character set

Displays statistics using the `roman8` character set and row labels and error messages in French:

```
optdiag statistics pubs2..titles -Usa -Ppasswd  
-o titles.opt -J roman8 -z french
```

Binary statistics

Displays binary statistics for the `price` column in the `titles` table:

```
optdiag binary statistics pubs2..titles.price  
-Usa -Ppasswd -o price.opt
```


Edited statistics

Loads edited statistics from the `price.opt` file:

```
optdiag statistics -i price.opt -Usa -Ppasswd
```

Related Information

[ddlgen \[page 62\]](#)

[Database Creation and Manipulation Utilities \[page 11\]](#)

2.21.1 Usage for optdiag

Take these into consideration when using `optdiag`.

- Set the SYBASE environment variable to the location of the current version of SAP ASE before using `optdiag`.
- By default, `optdiag` does not include the system tables when you display statistics for a database. To include the system tables in the output, use the `-s` flag.
- You cannot specify a particular partition on the `optdiag` command line; `optdiag` displays statistics for all partitions of a specified table.
- When you use `binary` mode, `optdiag` displays the human-readable values with comment marks (`#`s) at the beginning of the lines, as shown in this example:

```
Statistics for column:          "price"
Last update of column statistics: Jan 20 1998   7:16PM
Statistics loaded from Optdiag.
#   Range cell density:         0x3f8b9cfefece26bf
#   Range cell density:         0.0134830400000000
#   Total density:              0x3f8b9cfefece26bf
#   Total density:              0.0134830400000000
#   Range selectivity:          default used (0.33)
#   Range selectivity:          default used (0.33)
#   In between selectivity:     default used (0.25)
#   In between selectivity:     default used (0.25)
```

- When you use `optdiag` with an input file to change statistics, it ignores all characters after the `#` in a line.
- Converting floating-point values may lead to rounding errors when you use files for input. When you are loading statistics on the same hardware platform, edit the statistics using the binary values to provide greater precision.
- `optdiag` displays:
 - The statistic `sampling percent last used`, which indicates that statistics are gathered with a user-specified sampling percent.
 - Statistics for each partition of a multi-partitioned table or index.
 - Global- and partition-level statistics for each column in a table with multiple partitions.
- Use `ddlgen` partition names and the `optdiag` utility to analyze optimizer behavior by creating empty partitioned tables with simulated metadata.

- Do not specify the `-k` option in conjunction with the `-U` and `-P` options, otherwise error occurs. The `-k` option automatically retrieves the user name, password, and server connection information from the secure store for you.

See also:

- *Performance and Tuning Guide* – for details on `optdiag` output, and changing statistics using `optdiag`
- *Reference Manual: Commands* – `create index`, `create login`, `delete statistics`, `set`, `update statistics`
- *Reference Manual: Procedures* – `sp_configure`, `sp_defaultlanguage`, `sp_droplanguage`, `sp_flushstats`, `sp_helplanguage`

2.21.1.1 Byte Ordering and Binary `optdiag` Files

Do not use the `binary` mode option to move statistics between SAP ASE servers on machines that use different byte ordering.

- On an incompatible architecture server, always comment out binary statistics and load the human-readable statistics.
- On a compatible architecture server, load either binary statistics or human-readable statistics.

2.21.1.2 `optdiag` Input Mode

When you use the `-i <input_file>` syntax, `optdiag` reads the file as named and updates statistics in `sysstatistics`.

`optdiag` input mode changes the `allow update to system tables` configuration parameter by setting the parameter to 1 at the beginning of the session, and then to 0 at the end of the session.

During histogram input, the process checks these rules and displays error messages for any violated rules:

- The step numbers must increase monotonically, unless the command includes the `-T4` trace flag.
- The column values for the steps must increase monotonically.
- The weight for each cell must be between 0.0 and 1.0.
- The total of weights for a column must be close to 1.0.
- The first cell represents null values, and it must be present, even in columns that do not allow null values. There must be only one cell to represent the null value.
- Two adjacent cells must not both use the `<` (less than) operator.

2.22 `preupgrade`

Performs tests on an installation or database to determine its readiness for upgrade, and reports found problems.

The utility is located in:

- (UNIX) `$$SYBASE/$SYBASE_ASE/upgrade`.
- (Windows) `%SYBASE%\%SYBASE_ASE%\upgrade, as preupgrd.exe`.
- In SAP ASE 16.0 SP02 PL05 and later, the `preupgrade` utility is also available at the top level of the image directory to allow for a preupgrade check before installing SAP ASE.

Syntax

```
preupgrade [-v] [-h] [-N] [t]
  [-p [<skip_sybprocs>]]
  [-D <database_name>]
  [-I <interfaces_file>]
  [-P <password>]
  [-S <server_name>]
  [-U <user_name>]
  [-t<user_name>]
  [-X <option>[,<option>]...]
```

Parameters

-D <database_name>

limits checking to the named database and a subset of possible checks. Use this parameter to check newly loaded databases before bringing them online.

-h

prints help text and then exits. Lists the options recognized by `-x`.

-I <interfaces_file>

specifies an interfaces file for the server. The default is `$$SYBASE/interfaces`.

-N

specifies `preupgrade` is to run in noninteractive mode. Thus, if `preupgrade` determines that any database is too small, the utility exits immediately.

-p [<skip_sybprocs>]

specifies whether you want to skip the parsing validity test on stored procedures.

During the upgrade process, stored procedures are automatically re-created internally from the text source, requiring that they be parsed correctly. The valid options for `preupgrade -p` are:

- `-p` – skips the parsing in all databases
- `-p skip_procs` – skips parsing in `sybssystemprocs` while parsing the other databases
- Not using `-p` – parses text everywhere. This is the default.

-P <password>

specifies the password for connecting to the server. SAP recommends that you do not use this option on the command line as the password is then visible to other users

when they view displays of system information. Rather, wait until the SAP ASE server prompts for a password, and enter the information then.

-t

suppresses the usual check for stored procedure text.

-S <server_name>

specifies the name of the server to which you want to connect. This server must be listed in the interfaces file specified by the **-I** parameter. The default is \$DSQUERY.

-U <user_name>

specifies the user name to use when connecting to the server. The default is "sa." **<user_name>** must have "sa_role" privileges on the server being checked.

i Note

If you use the **-D** option, which limits checking to a named database, and that database is offline, use **-Usa** as the user name; otherwise `preupgrade` will fail when it attempts to use that database.

-v

prints version information and exits.

-x <option>[, <option>...]

specifies a list of checks to be made. The default is all checks, except when using the **-D** option, which uses only a subset of available checks. If you specify the **-x** option more than once on the command line, `preupgrade` performs only those checks in the last entered **-x** parameter.

When using the **-x** parameter with an options list, either:

- List options without a space between the comma and the next option, or
- Surround the options list with quotes.

Valid check options are:

Check Option	Option Used With the -D Parameter	Description
all		Performs all permitted checks. When used with the -D option, only checks subset of options. Otherwise, all options are checked.
cache		Checks the definition of default cache size. If the definition is DEFAULT, enter its current value in the configuration file as its actual value. This ensures that its size does not change because the new server's default value is different from the current server's default value.

Check Option	Option Used With the <code>-D</code> Parameter	Description
<code>config</code>		<p>Checks the server's configuration parameters to see if they are consistent with new requirements, and reports discrepancies.</p> <p>Discrepancies can cause errors or warnings for certain parameters:</p> <ul style="list-style-type: none"> • Errors – occur when the current value of a parameter is outside the new server's range, or when its value is too low for upgrade. • Warnings – occur when the current value of a parameter is between the maximum and minimum values, but less than the default value
<code>data_mods</code>		Performs updates to system tables, including clearing certain system table columns that are non-zero. Applies primarily to older SAP ASE servers, and will make no changes to newer systems.
<code>datatype</code>	X	Checks the <code>systypes</code> table to make sure that if existing datatypes use a system-defined name, type, or user type, they match what the new server expects. Reports discrepancies and suggests remedies.
<code>db_size</code>		Checks that certain system databases meet the minimum size requirements for installation.
<code>free_space</code>	X	Checks for free space in the named database or in all databases. Makes sure that there is sufficient free data and log space to perform the necessary upgrade steps.
<code>object_id</code>	X	<p>Checks that object IDs of user-defined objects are not reserved for system objects.</p> <ul style="list-style-type: none"> • SAP ASE 15.0 and later reserves objects IDs 1 – 255. • SAP ASE 12.5.x and earlier reserves object IDs 1 – 99. <p>Does not issue an error. If you receive a warning that a user object ID is reserved, contact Technical Support for directions for changing the user object ID after upgrade.</p>
<code>require_d_bsb</code>		Checks that required system databases exist. Some versions of SAP ASE may require specialized databases such as <code>sybsystemdb</code> .
<code>sproc_text</code>	X	Checks for the existence of stored procedure text in the named database or in all databases. After upgrade, the SAP ASE server must recompile stored procedures from their source text. This check makes sure that all of the source text is both available and valid.

Check Option	Option Used With the -D Parameter	Description
srvclass		Checks for servers classed as "generic" in <code>master.dbo.sysservers</code> . This class is deprecated by SAP ASE 12.0 and later.
statistics		Checks for duplicate rows in <code>sysstatistics</code> . Duplicate rows may occur when upgrading from SAP ASE 12.0 to SAP ASE 15.0 and later due to schema changes in the <code>sysstatistics</code> table.

Versions of SAP ASE may occasionally change valid options for the `-x` parameter; use the `-h` parameter to view the current set of valid options.

Examples

Check options (-X)

Specifies checks for the default cache size, minimum database size, and duplicate rows in `sysstatistics` for the installation:

```
preupgrade -X cache,db_size,statistics
```

Check database (-D)

Checks a newly loaded, offline database for datatypes, free space, object IDs, and stored procedure text:

```
preupgrade -Dmy_db -Usa
```

Noninteractive mode (-N)

Shows how the `sqlupgrade` utility uses `preupgrade`. When used in this way, `preupgrade` checks all databases, runs noninteractively, and exits with a failing status if any database is too small:

```
preupgrade -N
```

Permissions

The user login specified by the `-u` parameter must have `sso_role` privileges to run `preupgrade` on the server specified by the `-s` parameter.

When using the `-D` parameter to check an offline database, `preupgrade` must log in as user "sa." The "sa_role" privilege is insufficient.

Related Information

[sqlupgrade \[page 163\]](#)

[sqlupgraderes \[page 165\]](#)

[Installation or Configuration Utilities \[page 9\]](#)

2.22.1 Usage for preupgrade

There are additional considerations when using `preupgrade`.

- When `preupgrade` finds no errors, it exits with status 0 (zero).
- `preupgrade` is primarily used before upgrading an installation to ensure the procedure will run smoothly. You can also run `preupgrade` after loading a database created by a previous version of Adaptive Server to check for problems that might prevent that database from upgrading while being brought online.
- `sqlupgrade` calls `preupgrade` as part of its normal procedure.

2.22.1.1 The preupgrade -D Parameter

Use the `-D` parameter primarily to check newly loaded databases before bringing them online.

To do so, `preupgrade` must force access to offline databases, which requires that `preupgrade` log in as user "sa." The "sa_role" privilege alone is insufficient. The default is `-U sa`.

When run as part of a normal upgrade, the `-D` parameter is optional, and you can choose a system administrator login other than "sa."

Unless the `-D` parameter is included, `preupgrade` checks all databases in the system, and runs only on previous server versions.

`sqlupgrade` always runs the full set of `preupgrade` checks. Correct problems and run `preupgrade` to ensure that the problems are indeed corrected before letting `sqlupgrade` repeat the full `preupgrade` procedure.

If the `-D` parameter is included, `preupgrade`:

- Checks only the named database.
- Can run be run against server of the same version number as the `preupgrade` utility.
- Limits checking to a subset of possible checks. See `-x` parameter for a list of checks that are valid when used in conjunction with this parameter.

When running `preupgrade` after an upgrade to check a newly loaded but offline database, use the `-D` parameter and either specify the "sa" login or omit the `-U` parameter.

When you specify the `-D` option, or specify a partial list of options with the `-x` parameter, `preupgrade` performs the specified checks and, if there are no errors, displays a list of checks performed in the exit message.

You may want to use the `-D` and the `-x` parameters as part of the normal upgrade if `preupgrade` reports warnings or errors for a particular database or area. Using these parameters allows you to focus on problem areas without repeating unnecessary checks.

2.23 pwdcrypt

Creates and prints an encrypted LDAP password in the `libtc1.cfg` file.

The utility is located in:

- (UNIX) `$SYBASE/$SYBASE_OCS/bin`.
- (Windows) `%SYBASE%\%SYBASE_OCS%\bin`, as `pwdcrypt.exe`.

Before using `pwdcrypt`, set the SYBASE environment variable to the location of the current version of SAP ASE.

Syntax

```
pwdcrypt
```

Examples

Example of pwdcrypt

Enter `pwdcrypt` at the prompt to return a request to enter your password twice, after which `pwdcrypt` returns the LDAP password:

```
pwdcrypt
Enter password please: <password>
Enter password again : <password>
```

```
The encrypted password:
0x01312a775ab9d5c71f99f05f7712d2cded288d0ae1ce79268d0e8669313d1bc4c706
```

Replace the last part of the LDAP URL in `libtc1.cfg` with this encrypted password:

```
ldap=libsybdldap.so
ldap://dolly:389/dc=sybase,dc=com???bindname=cn=Manager,dc=sybase,dc=com?
0x01312a775ab9d5c71f99f05f7712d2cded288d0ae1ce79268d0e8669313d1bc4c706
```

An unencrypted password looks similar to:

```
ldap=libsybdldap.so
ldap://dolly:389/dc=sybase,dc=com???bindname=cn=Manager,dc=sybase,dc=com?
secret
```


Permissions

Use file system permissions to prevent unauthorized access to this encrypted password in your `libtcl.cfg` file.

2.24 qptune

`qptune` is an SAP ASE utility written in Java/XML. It enables users to fix missing statistics and identify the best query plan, optimization goals, or other configuration settings, and apply them at the query or server level. This results in optimal performance of subsequent query executions.

Syntax

```
qptune
  [-U <username>]
  [-P <password>]
  [-S <hostname>:<port>/<database>]
  [-A <action>]
  [-M <mode>]
  [-T <appTime>]
  [-i <inputFile>]
  [-o <outputFile>]
  [-f <fileList>(,)]
  [-c <configFile>]
  [-l <limit>]
  [-e <evalField>]
  [-d <difference>]
  [-m <missingCount>]
  [-n <login>]
  [-J <charset>>]
  [-N (noexec)]
  [-g (applyOptgoal)]
  [-v (verbose)]
  [-s (sort)]
  [-h (help)]
```

Parameters

-U <username>

specifies the database user name.

-P <password>

specifies the database password.

-S <server>

specifies the database server. The database server is denoted by `<host>:<port>/<database>`.

i Note

Specify the `-s` option while using any `qptune` action.

-A <action>

specifies the action to be taken. Valid actions are:

- `start`
- `collect` – the default value
- `collect_full`
- `compare`
- `fix`
- `start_stats`
- `collect_stats`
- `fix_stats`
- `undo_fix_stats`

-c <configFile>

specifies the configuration file. The default value is `config.xml`.

-d <difference>

specifies the percentage and absolute value difference for performance improvement to be considered outstanding using the format `-d <<diff>%(<diff_abs>)>`. The default value is 5,5. If you specify percentage but not the absolute value, then absolute value defaults to 0.

-e <evalField>

is the evaluation field used for performance comparison. The default value is `elap.avg`.

-f <fileList>

compares a list of files to get the best plans; use commas to separate filenames.

-g

when used along with the `fix` action, applies the default goal. The default goal is the best `optgoal` setting that most queries used as the best plan using QPTune's `fix` action. This option only generates plans for queries that do not currently use the server's default optimization goal.

-i <inputFile>

specifies the input file for the `fix`, `fix_stats`, and `undo_fix_stats` actions. You can also use `-i` to apply special rules to the specified queries for `start` for custom modes.

-J <charset>

specifies the character set used to connect to an SAP ASE server. If you do not specify this option, the SAP ASE server uses the server's default character set.

i Note

If the installed JRE does not support the server's default charset encoding, you see an error message during the login process. Use the `-J` option to specify a more generic character set, such as `-J utf8`.

-l <limit>

specifies a limit on the number of queries that should be analyzed and applied with special rules.

-M <mode>

specifies the optimization goal or custom mode for an application. The valid options for <mode> are `allrows_oltp`, `allrows_dss`, `allrows_mix`. You may also define custom modes, however `_basic_` is a system-reserved custom mode. The default value is `allrows_dss`.

-m <missingCount>

specifies the threshold value for missing statistics. The default value is 5.

-N

used along with `fix_stats` and `undo_fix_stats`, `-N` generates a SQL script with `update statistics` or `delete statistics` statements. The `update` or `delete` statements are not executed through `qptune`. The statements are written into a SQL script that is specified by the `-o` option.

-n <login>

specifies the user's login whose query executions are collected and analyzed.

-o <outputFile>

specifies the output file. The default value is `metrics.xml`.

-T <appTime>

specifies the application running time, in minutes. The default value is 0.

-v

specifies verbose mode. Do not use `-v` when collecting more than 1,000 queries, as `qptune` can take a long time to export all the query information on the console. Instead, view the output XML file for query details.

Examples

Fix stats

Fixes missing statistics, starts the utility with the `start_stats` action:

```
QPTune -A start_stats -S my_host:4816/my_database -v
Executing : QPTune -U sa -P [unshown]
-S jdbc:sybase:Tds:my_host:4816/my_database
-A start_stats -M allrows_dss -T 0 -i null
-o metrics.xml -f null -c config.xml -l 5
-e elap_avg -d 5,5 -m 5 -n null -v
You are now connected to database: my_database
[INFO] Config: sp_configure 'capture missing statistics', 1
[INFO] Config: sp_configure 'system table', 1
[INFO] Config: delete sysstatistics where formatid =110
```

Retrieve missing information

Uses `collect_stats` to retrieve missing statistics information from the `sysstatistics` table for statistics that exceed a specified threshold for count of missing statistics:

```
QPTune -A collect_stats -m 1 -o missingstats.xml -v
      -S my_host:4816/my_database
Executing : QPTune -U sa -P [unshown] -S jdbc:sybase:Tds:my_host:4816/
my_database -A collect_stats -M allrows_dss -T 0 -i null -o missingstats.xml -
f null -c config.xml -l 5 -e elap_avg -d 5,5 -m 1 -n null -v
You are now connected to database: my_database
Now collecting missing statistics information from sysstatistics on "Fri Sep
26 10:08:06 PDT 2008".
<?xml version="1.0" encoding="UTF-8"?>
<server url="jdbc:sybase:Tds:my_host:4816/my_database"
file="missingstats.xml"
type="missing stats" datetime="Fri Sep 26 10:08:06 PDT 2008" >
  <missingStat id="1">
    <id>1068527809</id>
    <stats>Y(y4,y2)</stats>
    <count>2</count>
  </missingStat>
  <missingStat id="2">
    <id>1068527809</id>
    <stats>Y(y3)</stats>
    <count>1</count>
  </missingStat>
  <missingStat id="3">
    <id>1068527809</id>
    <stats>Y(y2,y1)</stats>
    <count>1</count>
  </missingStat>
  <missingStat id="4">
    <id>1068527809</id>
    <stats>Y(y1)</stats>
    <count>1</count>
  </missingStat>
</server>
The missing statistics information is written into XML file: missingstats.xml
[INFO] End config: sp_configure 'enable metrics capture', 0
[INFO] End config: sp_configure 'abstract plan dump', 0
[INFO] End config: sp_configure 'system table', 0
[INFO] End config: sp_configure 'capture missing statistics', 0
Program has restored the data source for metrics collection.
----- QPTune finished executing. -----
```

Update statistics

After collecting missing statistics information into an XML file called `missingstats.xml`, updates the statistics using the `fix_stats` action:

```
QPTune -A fix_stats -m 1 -i missingstats.xml
      -v -S my_host:4816/my_database
Executing : QPTune -U sa -P [unshown] -S jdbc:sybase:Tds:my_host:4816/
my_database -A fix_stats -M allrows_dss -T 0 -i missingstats.xml -o
metrics.xml -f null -c config.xml -l 5 -e elap_avg -d 5,5 -m 1 -n null -v
You are now connected to database: my_database
Fix statistics on "Fri Sep 26 10:14:59 PDT 2008"
-----
Details of statements(s) fixed:
-----
Fixed statistics:[Update] Y(y4,y2)
[INFO] Fix Statement = update statistics Y(y4,y2)
Fixed statistics:[Update] Y(y3)
[INFO] Fix Statement = update statistics Y(y3)
Fixed statistics:[Update] Y(y2,y1)
```

```
[INFO] Fix Statement = update statistics Y(y2,y1)
Fixed statistics:[Update] Y(y1)
[INFO] Fix Statement = update statistics Y(y1)
----- QPTune finished executing. -----
```

Generates a SQL script for updating statistics, without executing the actual updates, by using the `-N` option to indicate “noexec”, and the `-o` option to indicate the output script file:

```
QPTune -U sa -P -S my_host:5000/my_database
      -A fix_stats -m 5 -i missingstats.xml
      -N -o missingstats.sql
```

Start QPTune

Starts QPTune to apply standard optimization goal settings to queries:

```
QPTune -S <host>:<port>/<database> -A start
      [-M {allrows_oltp, allrows_dss, allrows_mix}]
```

Start QPTune to apply custom rules to specified queries:

```
QPTune -S <host>:<port>/<database> -A start -M custom_1
      -i input.xml -l 3 [-v]
```

Collect metrics

Runs your application and collect metrics into an XML file named `a2.xml`:

```
QPTune -S <host>:<port>/<database> -A collect -T 0
      -o a2.xml -v
Program has configured the data source for metrics collection.
Now collecting information from sysquerymetrics on "Tue Feb 19 22:16:04 PST
2008".
<?xml version="1.0" encoding="UTF-8"?>
  <server url="jdbc:sybase:Tds:SHANGHI:5000" type="ASE" mode="custom_1"
datetime="Tue Feb 19 22:16:04 PST 2008">
    <query id="1">
      <qtext> select count(T.title_id) from authors A, titleauthor T
where A.au_id = T.au_id </qtext>
      <elap_avg>300</elap_avg>
      <bestmode> custom_1
    </bestmode>
    </query>
  </server>
```

Compare XML files

Once metrics are collected, compares different XML files to get the best query optimization goal or criteria for each of the queries:

```
QPTune -A compare -f a1.xml,a2.xml -d 51,10
      -o best.xml -S my_host:5000/my_database
```

This result shows a comparison between two XML metrics files: `a1.xml` has six queries, and `a2.xml` has seven queries. Comparisons can only be made between the queries that are common to both files. There are three queries that ran faster in `a2.xml`:

```
Compare all the files: | a1.xml, a2.xml|
Report generated on "Tue Aug 19 21:13:04 PST 2008"
-----
File #1: [name= a1.xml   : mode=allrows_mix]
File #2: [name= a2.xml   : mode=custom_1]
```

```

Query count in File #1 : [mode=allrows_mix]          6
Query count in File #2 : [mode=custom_1]            7
=====
Query count improved in File #2: [mode=allrows_mix]  3
Total performance improved [from 422 to 129]: 69 %
Following queries run better in File #2:
[mode=allrows_mix]
-----
Group 1: improved by no more than 25% [0 queries]
Group 2: improved by 25% to 50% [1 queries]
Query: select count(T.title_id) from authors A, titleauthors T where A.au_id
= T.au_id
Average elapsed time (ms): File #1=100 File
#2=50 Improvement=50.0% Outstanding=No
Group 3: improved by 50% to 75% [0 queries]
Group 4: improved by 75% to 100% [2 queries]
Query: select count(*) from titles T, titleauthors TA where T.title_id =
TA.title_id
Average elapsed time (ms): File #1=34 File
#2=7 Improvement=79.0% Outstanding=Yes
Query: select au_lname, au_fname from authors where state in ("CA", "AZ")
Average elapsed time (ms): File #1=9 File
#2=0 Improvement=100.0% Outstanding=No

```

Usage

When you use QPTune to collect a very large number of queries, you may see a message such as:

```

Exception in thread "main" java.lang.OutOfMemoryError:
Java heap space

```

If this occurs, increase the value of the maximum heap size of the Java Virtual Machine (JVM) by using `sp_jreconfig` to set the `-Xmx` arguments of the `PCA_JVM_JAVA_OPTIONS` directive to a size larger than the default of 1024MB. See Chapter 2, "Managing the Java Environment" in *Java in Adaptive Server Enterprise* for more information about `-Xmx`.

When you use QPTune to collect a large amount of queries, do not use the `-v` verbose option.

See also:

- *Java in Adaptive Server Enterprise*
- *Migration Technology Guide*
- *Reference Manual: Procedures – sp_jreconfig*

Permissions

QPTune's `compare` action may be run by any user. All other actions of QPTune may only be run by users with `sa_role` and `sso_role`.

Related Information

[Tuning Utility \[page 12\]](#)

2.25 qrmutil

(Cluster Edition only) `qrmutil` allows you to back up, restore, and reconfigure the quorum device.

The utility is located in `$SYBASE/$SYBASE_ASE/bin`.

Syntax

```
--additional-run-parameters=<parameter_list>
--ase-config-extract=<file_name>
--ase-config-info
--ase-config-store=<file_name>
--ase-config-version=<version_number>
--buildquorum=[force]--cluster-take-over
--config-file=<file_name>
--diag={all | boot | toc | nodes | locks | config | cms}
--display={boot | nodes | heartbeat | master | cluster |
instance | config | state}
--drop-cluster=[force]
--drop-instance=<instance_name>
--errorlog=<file_name>
--extract-config=<file_name>
-h, --help
-F, --cluster-input=<file_name>
--fence-capable=<device_path>
--installation=<installation mode>
-s, --instance=<instance_name>
--instance-node=<node_name>
--interfaces-dir=<path_to_interfaces_file>
--max-instances=<number_of_instances>
--master-dev=<master_device>
--membership-mode=<membership_mode>
--primary-address=<interconnect_address>
--primary-port=<port_number>
--primary-protocol=<protocol>
-Q, --quorum-dev=<quorum_device>
--register-node=<node_name>
--secondary-address=<interconnect_address>
--secondary-port=<port_number>
--secondary-protocol=<protocol>
--traceflags=<traceflag_list>
--unregister-node=<node_name>
--verify-node=<node_name>
-v, --version]
```

Parameters

--additional-run-parameters=<parameter_list>

parameters that the agent uses to start the data server. Unlike other settings, `dataserver` does not read additional run parameters. They are read by the agent and passed to the `dataserver` command line. If you include the `--instance` parameter, the additional run parameters apply to the specified instance. Otherwise, the additional run parameters apply to all instances in the cluster.

--ase-config-extract=<file_name>

extracts the SAP ASE configuration file stored on the quorum device to the named file.

--ase-config-info

displays information about the SAP ASE configuration file stored on the quorum device.

--ase-config-store=<file_name>

stores the named file in the quorum device as the SAP ASE configuration file.

--ase-config-version=[<version_number>]

displays or sets the version of the master SAP ASE configuration file stored on the quorum device.

--buildquorum[=force]

builds a new quorum device. Use `=force` to overwrite an existing file or an existing quorum device on a raw partition. You must include the `--cluster-input` parameter with `--buildquorum`.

--config-file=<config_file_name>

if used with `-instance`, sets this path to the SAP ASE configuration file for the specified instance. If you do not include `-instance`, sets the path to the cluster-wide configuration file.

--diag={all | boot | toc | nodes | locks | config | cms}

for internal use only.

--display={boot | nodes | heartbeat | master | cluster | instance | config | state}

displays the current state of cluster or instance:

- `boot` – displays start-up information for the cluster, including the version of the quorum device, any trace flags issued at start-up, the boot ID of the cluster, and any messages displayed at start-up.
- `nodes` – displays the registered management nodes.
- `heartbeat` – displays heartbeat information for all nodes in the cluster.
- `master` – displays master device information.
- `cluster` – displays the cluster configuration.
- `instance` – displays the instance configuration. You must include `--instance=<instance_name>` with this parameter.
- `config` – displays configuration for the cluster and for all instances in the cluster.
- `state` – displays the current state for the cluster and for all instances in the cluster.

--drop-cluster=[force]

drops a cluster and removes the quorum device. Use `=force` to force the drop if the quorum indicates the cluster is running.

⚠ Caution

`--drop-cluster` removes the cluster.

`--drop-instance=<instance_name>`

do not use; internal use only.

⚠ Caution

Use the `sybcluster` utility to drop an instance from the cluster.

`--errorlog=<log_file_name>`

full path to the error log for the specified instance. You must include the `-instance-name` parameter. Takes effect at next restart of the instance.

`--extract-config=<file_name>`

extracts the configuration area of the quorum device to the specified file.

`-h | --help`

displays the full syntax of `qrmutil`.

`-F | cluster-input=<file_name>`

loads the cluster configuration from the specified cluster input file.

`--fence-capable=<device_path>`

tests if specified device can be used for I/O fencing. Returns either "Device is fence capable" or "Device is not fence capable".

`--installation=<installation_mode>`

changes the installation mode for the cluster. Values are:

- `shared` (default)
- `private`

`-instance=<instance_name>`

applies `qrmutil` parameters to a specified instance.

`--interfaces-dir=<interfaces_path>`

the path to a directory that contains a file named `interfaces`. If this parameter is used with `--instance`, it sets the path to the `interfaces` file for the specified instance. If `--instance` is not included, sets the path to the cluster-wide `interfaces` file.

`--max-instances=<number_of_instances>`

sets the maximum number of instances for the cluster configuration.

`--master-dev=<master_device_name>`

changes the master device the cluster uses.

`--membership-mode=<membership_mode>`

sets the membership mode. Values are:

- `native` (default)

- vcs

--primary-address=<interconnect_address>
changes the primary interconnect address for a given instance.

--primary-port=<port_number>
changes the starting port number for the primary interconnect for a given instance.

--primary-protocol=<protocol>
changes the protocol used for the primary cluster interconnect.

-Q | --quorum-dev=<quorum_path>
specifies the full path to the quorum device.

--register-node=<node_name>
registers a node for quorum management.

--secondary-address=<interconnect_address>
changes the secondary interconnect address for a given instance.

--secondary-port=<port_number>
changes the starting port number for the secondary interconnect for a given instance.

--secondary-protocol=<protocol>
changes the protocol used for the secondary cluster interconnect.

--traceflags=<trace_flag>, <trace_flag>
changes the cluster-wide or the instance-specific trace flags for start-up. If you do not include a list of trace flags, `qrmutil` clears the trace flags for the cluster instance.

--unregister-node=<node_name>
unregisters a node from quorum management.

--verify-node=<node_name>
indicates that the specified node is registered on the quorum device.

-v | --version
displays the version information for the `qrmutil` utility.

Examples

Change path

Changes the path to the error log to `/sybase/opt/cluster/ASE-15_0/ase1.log`:

```
qrmutil --quorum_dev=/dev/raw/raw101 --instance=ase1
--errorlog=/sybase/cluster/ASE-15_0/ASE-15_0/ase1.log
```

Register node

Registers the node "blade5" for mycluster:

```
qrmutil --quorum_dev=/dev/raw/raw101 --register-node=blade5
```

Create quorum device

Creates a new quorum device for the cluster “mycluster”:

```
qrmutil --quorum-dev=/dev/raw/raw101 --cluster-input=/sybase/cluster/ase1.inp  
-buildquorum
```

Back up device

Backs up the quorum device to /sybase/cluster_bak/quorum.bak:

```
qrmutil --quorum-dev=/dev/raw/raw101  
--extract-config=/sybase/cluster_bak/quorum.bak
```

Restore device

Restores the quorum device from the backup created in /sybase/cluster_bak/quorum.bak:

```
qrmutil --quorum-dev=/dev/raw/raw101 --cluster-input=/sybase/cluster_bak/  
quorum.bak --buildquorum=force
```

Display configuration

Displays the cluster configuration stored on the quorum device:

```
qrmutil --quorum-dev=/dev/raw/raw101 --display=config
```

Test

Tests whether the named device can be fenced:

```
qrmutil --quorum-dev=/dev/raw/raw101 --fence-capable=/dev/raw/raw106
```

Usage

- `qrmutil` is primarily a diagnostic utility. We recommend that you use `sybcluster` to make configuration changes to the cluster.
- You may pass as many as 20 commands to `qrmutil`. However, you can specify the `--instance=` parameter only once.
- If you specify `--buildquorum`, the quorum is built and `qrmutil` exits without running any commands other than `--cluster-input`.
- `qrmutil` exits after it executes the `--drop-cluster` parameter.
- This is an example of using multiple commands:

```
qrmutil --quorum-dev=/dev/raw/raw101 --display=cluster  
--register-node=blade1 --unregister-node=blade2 --verify-node=blade3
```

Permissions

To run `qrmutil`, you must be the same `sybase` user that started the instance, with execute privileges on the `qrmutil` binary, have direct access to the quorum device, and at least `read` permissions on the quorum file.

2.26 showserver

(UNIX only) Shows the SAP ASE servers and Backup Servers that are currently running on the local machine, available only in UNIX platforms.

The utility is located in `$SYBASE/$SYBASE_ASE/install`.

Syntax

```
showserver
```

Parameters

None

Examples

Servers running

Shows the SAP ASE servers and Backup Servers that are currently running on the local machine:

```
showserver
USER          PID %CPU %MEM  SZ  RSS TT  STAT  START  TIME  COMMAND
user114276    0.0  1.7  712 1000 ?  S    Apr  5514:05  dataserver
-d greensrv.dat -sgreensrv -einstall/greensrv+_errorlog
sybase       1071  0.0  1.4  408  820 ?  S    Mar 28895:38  /usr/local/sybase/bin/
dataserver -d/dev/rsd1f -e/install/errorlog
user128493    0.0  0.0  3692  0 ?  IW   Apr  1  0:10  backupserver -SSYB_BACKUP
-e/install/backup.log -Iinterfaces -Mbin/sybmultbuf -Lus_english -Jiso_1
```

Usage

`showserver` displays process information about an SAP ASE server or Backup Server. If no servers are running, only the header appears.

See also:

- *Reference Manual: Building Blocks* – `host_name`
- *Reference Manual: Commands* – `startserver`

Related Information

[dataserver](#) [page 53]

[startserver](#) [page 170]

[langinstall](#) [page 121]

[Utilities to Gather Information](#) [page 12]

2.27 sqldbgrr

`sqldbgrr` is a command line utility that debugs stored procedures and triggers.

The utility is located in:

- (UNIX) `$SYBASE/$SYBASE_ASE/bin`.
- (Windows) `%SYBASE%\%SYBASE_ASE%\bin`, as `sqldbgrr.exe`.

As with many source-level debuggers, you can:

- Attach `sqldbgrr` to a task
- Set, enable, and disable breakpoints
- Step through a task one line at a time
- Step into and out of procedures
- Detach `sqldbgrr` from stored procedures or triggers once the debugging is complete.

i Note

You do not have the ability to view `sqldbgrr` version strings.

Syntax

```
sqldbgrr
-U <username>
-P <password>
-S <host>:<port>
```

Parameters

-U <username>

specifies the user name. Insert a space between `-U` and `<username>`.

-P <password>

specifies the user password. Insert a space between `-P` and `<password>`.

-s <host>:<port>

specifies the machine name and the port number. Insert a space between **-s** and **<host:port>**.

Examples

Debug stored procedures and triggers

Shows `sqldbg` debugging stored procedures and triggers on host MERCURY:

```
$$SYBASE/$SYBASE_ASE/bin/sqldbg -U sa -P -S MERCURY:16896

(sqldbg) stop in sp_who
Breakpoint moved to line 20
(sqldbg) run sp_who
(sp_who::20)if @@trancount = 0
(sqldbg) next
(sp_who::22)    set chained off
(sqldbg) cont
fid spid status loginame origname hostname blk_spid dbname cmd block_xloid
0 2 sleeping NULL NULL 0 master NETWORK HANDLER 0
0 3 sleeping NULL NULL 0 master NETWORK HANDLER 0
0 4 sleeping NULL NULL 0 master DEADLOCK TUNE 0
0 5 sleeping NULL NULL 0 master MIRROR HANDLER 0
0 6 sleeping NULL NULL 0 master ASTC HANDLER 0
0 7 sleeping NULL NULL 0 master ASTC HANDLER 0
0 8 sleeping NULL NULL 0 master CHECKPOINT SLEEP 0
0 9 sleeping NULL NULL 0 master HOUSEKEEPER 0
0 10 running sa sa 0 master SELECT 0
0 11 sleeping sa sa
(sqldbg) show breakpoints
1 stop in sp_who
(sqldbg)
```

Debug a stored procedure running in another task

In this example, the system administrator first logs in to an SAP ASE server using `isql`, then starts `sqldbg` from the command line to debug a stored procedure that is running in another task:

```
$$SYBASE/$SYBASE_OCS/bin/isql -U sa -P
1> select @@spid
2> go
-----
12
1>
$$SYBASE/$SYBASE_ASE/bin/sqldbg -U sa -P -S MERCURY:16896

(sqldbg) attach 13
The spid is invalid
(sqldbg) attach 12
(sqldbg) show breakpoints
(sqldbg) stop in sp_who
Breakpoint moved to line 20
(sqldbg) /* at this point run the sp_who procedure from spid 12 */
(sqldbg) where
(sp_who::20::@loginame = <NULL>)
(ADHOC::1::null)
(sqldbg) next
(sp_who::22)    set chained off
```

```
(sqldbgr) next
(sp_who::25)set transaction isolation level 1
(sqldbgr) cont
(sqldbgr) /* at this point the sp_who result will show up in the isql screen */
(sqldbgr) detach 12
(sqldbgr)
```

2.27.1 Usage for sqldbgr

Additional usage instructions for `sqldbgr`.

- The `sql` command is executed in the context of debugged task, while the `mysql` command is executed in the context of debugger task. Setting session-specific information, such as for `set quoted_identifier on` through `sql` does not work.
- By default, the SAP jConnect for JDBC driver uses `set quoted_identifier on`. Since the `sqldbgr` utility is built using jConnect arguments that need quotes, use single quotes instead of double quotes when entering options. For example, use `sp_configure 'allow update'` instead of `sp_configure "allow update"`.
- Before running `sqldbgr`, set either the `SYBASE_JRE` or `JAVA_HOME` environments to the location containing the Java run environment.
- When you invoke `sqldbgr` at the command prompt, the utility starts and the prompt changes to a `sqldbgr` prompt:

```
(sqldbgr)
```

Once you see the `(sqldbgr)` prompt, enter these `sqldbgr` commands to perform your tasks:

`sqldbgr` commands and their descriptions are:

Command	Description
attach <spid>	<p>Attaches a task to <code>sqldbgr</code> when you are already logged in to an SAP ASE server.</p> <p>Do not use <code>attach <spid></code> to attach to a procedure that is not running.</p> <p><code>sqldbgr</code> cannot debug multiple tasks in the same session. If you try to attach the utility to multiple tasks, the first <spid> continues to be marked as attached. Since you cannot attach to a <spid> that is already attached, use the <code>detach</code> command, and then attach to another <spid>.</p>
run <procname>	<p>Debugs stored procedures and triggers without attaching <code>sqldbgr</code> to an existing task.</p> <p>If you attempt to use <code>run procname</code> while you are already debugging an existing task with <code>attach spid</code>, <code>run procname</code> fails and you see:</p> <pre>Cannot run a procedure while debugging another task</pre>
stop in <procname> [at line <#>]	<p>Sets a breakpoint to stop the stored procedure or trigger being debugged at the beginning of the specified procedure name.</p>

Command	Description
	<p><code>stop in <procname> at line <#></code> sets a breakpoint to stop the stored procedure or trigger being debugged at a designated line within the specified procedure.</p> <p>If you enter an invalid line number, <code>sqldbg</code> moves the breakpoint to the next valid line number, and displays:</p> <pre data-bbox="542 548 1394 604">Invalid line number</pre> <p>You can also use this command to set multiple breakpoints.</p>
show breakpoints	<p>Displays the breakpoint handle in the form of a unique number, as well as the breakpoint statements given by the user during the <code>sqldbg</code> session.</p> <p>If you specify a breakpoint line number that does not contain a valid SQL statement, the SAP ASE server moves the breakpoint to the next valid line number. However, SAP ASE does not change the command you entered. This is why <code>show breakpoints</code> can return a breakpoint handle and a breakpoint statement given during the <code>sqldbg</code> session that can be different.</p> <p>An asterisk (*) in the breakpoint line indicates that the breakpoint is set, but currently disabled.</p>
use <dbname>	<p>Tells <code>sqldbg</code> what database to use in order to debug that database's stored procedures or triggers.</p>
show variables [at level <#>]	<p>Displays all the variables and their values in the current SQL stored procedure or trigger.</p> <p><code>show variables at level <#></code> – displays the variables and their values in the current SQL stored procedure or trigger at the specified level.</p>
	<div data-bbox="542 1346 1394 1458" style="background-color: #f0f0f0; padding: 5px;"> <p>i Note</p> <p><code>sqldbg</code> does not support Java variables.</p> </div>
show where	<p>Displays the call stack of the stored procedures and triggers that exist in the task being debugged.</p>
step or next	<p>Instructs <code>sqldbg</code> to move to the next statement in the current stored procedure or trigger.</p>
step into	<p>Instructs <code>sqldbg</code> to move into a procedure if the current statement is an <code>execute</code> statement. If the current statement is an <code>update</code>, <code>delete</code>, or <code>insert</code> statement, and if there are triggers in it, <code>step into</code> instructs <code>sqldbg</code> to move into the <code>update</code>, <code>delete</code>, or <code>insert</code> triggers.</p>
step out	<p>Instructs <code>sqldbg</code> to move out of the current stored procedure or trigger, and to stop at the next line in the calling procedure.</p>

Command	Description
<code>set @<varname> = VALUE</code>	Sets the value of the indicated variable to the variable value declared in the command in the current stored procedure or trigger. The values for the variables set using <code>set @<varname> = VALUE</code> are valid only for the current session <code>sqldbg</code> .
<code>cont[inue]</code>	Instructs <code>sqldbg</code> to continue debugging, and to stop at the next breakpoint (if any).
<code>delete <#></code>	Deletes the indicated breakpoint set in the current instance of <code>sqldbg</code> .
<code>enable <#></code>	Enables the indicated breakpoints, while <code>disable <#></code> does the opposite.
<code>sql <any_sql_statement></code>	Executes ad hoc SQL statements. Use this command to select and analyze data from temp tables created by the task being debugged. <code>sql <any_sql_statement></code> returns a result set and any errors that occurred.
<code>detach <spid></code>	Detaches <code>sqldbg</code> from the indicated <code><spid></code> , and releases the task being debugged. It deletes the breakpoints that were set for the task being debugged during the current <code>sqldbg</code> session.
<code>help [all]</code>	Display <code>sqldbg</code> commands.

2.27.1.1 Error Messages in sqldbg

Error messages for `sqldbg`.

Message	Displays When
Cannot allocate resource in ASE	The SAP ASE server does not have sufficient memory resources to execute <code>sqldbg</code> . Increase <code>procedure cache size</code> and restart <code>sqldbg</code> .
Cannot create Debugger handle in ASE	The SAP ASE server does not have sufficient memory resources to create a debugger handle. Increase <code>procedure cache size</code> and restart <code>sqldbg</code> .
The spid is invalid	You attempt to attach <code>sqldbg</code> to an invalid <code><spid></code> . Double check the <code><spid></code> and try again.
You cannot debug a task that is not owned by you	You are attempting to debug a task that you do not own. You must log in to the server as the owner of the task to be debugged.
Spid is already being debugged	You execute <code>attach <spid></code> and attempt to attach to a <code><spid></code> that is already being debugged.
Spid is not debugged currently	You execute <code>detach <spid></code> and attempt to detach from a <code><spid></code> that is not attached to <code>sqldbg</code> .

Message	Displays When
Invalid command	You enter an invalid command.
Invalid procedure name	You enter an invalid procedure name in stop in <procname>.
Invalid line number	You enter an invalid line number in stop in <procname> at line <#>.
Variable not found	You enter an invalid variable in show @<varname>, show @<varname> at level <#>, or set @<varname> = VALUE.
Illegal conversion attempted	You execute set @<varname> = VALUE and attempt to convert the variable to an invalid value.
Conversion from text to datatype failed	set @<varname> = VALUE is unsuccessful.
Cannot run a procedure while debugging another task	You use run <procname> while already debugging an existing task with attach <spid>.

2.28 sqlloc

(UNIX only) Installs and modifies languages, character sets, and sort order defaults for SAP ASE using a GUI.

The utility is located in \$SYBASE/\$SYBASE_ASE/bin.

Syntax

```
sqlloc
  [-S <server>]
  [-U <user>]
  [-P <password>]
  [-D <data_directory>]
  [-s <sybase_dir>]
  [-I <interfaces file>]
  [-r <resource file>]
```

Or

```
sqlloc -v
```

Parameters

-I <interfaces file>

specifies the name and location of the interfaces file to search when connecting to an SAP ASE server.

-P <password>

specifies the "sa" account password.

-D<data_directory>

(optional) specifies the working directory when it differs from the default installation directory for an SAP ASE server. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use `-D`, the SAP ASE server uses `$SYBASE` as the default.

-r <resource file>

executes the specified resource file.

-S <server>

specifies the name of the SAP ASE server to which to connect.

-U <user>

specifies a login name. Logins are case-sensitive.

-s <sybase dir>

specifies the value to use for the SYBASE environment variable.

-v

prints the version number and copyright message for `sqlloc` and then exits.

Usage

Set the:

- SYBASE environment variable to the location of the current version of SAP ASE before using `sqlloc`.
- DISPLAY environment variable before invoking `sqlloc`, unless you are only using the `-v` parameter to display the version number.

See also:

- Installation guide for your platform

Permissions

You must be a Sybase system administrator to use `sqlloc`.

Related Information

[langinstall \[page 121\]](#)

[sqllocres \[page 156\]](#)

[Utilities for Languages, Character Sets, and Sort Orders \[page 10\]](#)

2.29 sqllocres

(UNIX only) Installs and modifies languages, character sets, and sort order defaults for an SAP ASE server, using a resource file.

The utility is located in `$$SYBASE/$SYBASE_OCS/bin`.

Syntax

```
sqllocres
  [-S <server>]
  [-U <user>]
  [-P <password>]
  [-D <data_directory>]
  [-s <sybase_dir>]
  [-I <interfaces file>]
  [-r <resource file>]
```

Or

```
sqllocres -v
```

Parameters

-I <interfaces file>

specifies the name and location of the interfaces file to search when connecting to an SAP ASE server.

-P <password>

specifies the "sa" account password.

-D<data_directory>

(optional) specifies the working directory when it differs from the default installation directory for an SAP ASE server. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use `-D`, the SAP ASE server uses `$$SYBASE` as the default.

-r <resource file>

executes the specified resource file.

-S <server>

specifies the name of the SAP ASE server to which to connect.

-s <sybase dir>

specifies the value to use for the SYBASE environment variable.

-U <user>

specifies a login name.

-v

prints the version number and copyright message for `sqllocres`, then exits.

Usage

Set the SYBASE environment variable to the location of the current version of SAP ASE before using `sqllocres`.

See also:

- Installation guide for your platform

Permissions

You must be a Sybase system administrator to use the `sqllocres` utility.

Related Information

[langinstall \[page 121\]](#)

[sqlloc \[page 154\]](#)

[Utilities for Languages, Character Sets, and Sort Orders \[page 10\]](#)

2.30 sqlsrvr

(Windows only) The executable form of the SAP ASE program.

The utility is located in `%SYBASE%\%SYBASE_ASE%\bin`.

Syntax

```
sqlserver [-f] [-g] [-G] [-h] [-H] [-m] [-P] [-q] [-v] [-X]
  [-a <path_to_CAPs_directive_file>]
  [-b <master_device_size>] [k | K | m | M | g | G | t | T ]
  [-c <config_file_for_server>]
  [-d <device_name>]
  [-e <path_to_error_log>]
  [-i <interfaces_file_directory>]
  [-K <keytab_file>]
  [-L <config_file_name_for_connectivity>]
  [--master_key_password [=<password>]
```

```

[-M <shared_memory_repository_directory>]
[-p <sa_login_name>]
[-r <mirror_disk_name>]
[-s <server_name>]
[-T <trace_flag>]
[-u <sa/ssö_name>]
[-w <master >| <model database>]
[-y [<password>] ]
[-z <page_size> [ k | K ] ]

```

Parameters

-a <path_to_CAPs_directive_file>

specifies the path to the CAPs directive file.

-b<master_device_size> [k | K | m | M | g | G | t | T]

specifies the size of the master device.

-c <config_file_for_server>

specifies the full path name of an SAP ASE configuration file. Use this parameter to start an SAP ASE server with the configuration values in the specified configuration file. If you specify a configuration file with the `sqlsrvr -c` parameter, make sure all the parameters in this configuration file are compatible before you boot the server. If some of the configuration parameters are incompatible, the server may not start. To avoid this, do not specify a configuration file when you build the master device. The build phase uses all default settings when you do not specify a configuration file. For more information, see the *System Administration Guide: Volume 1*.

-d<device_name>

is the full path name of the device for the `master` database. The master database device must be writable by the user who starts the SAP ASE server. The default master database device name is `d_master`.

-e<errorlogfile>

is the full path name of the error log file for SAP ASE system-level error messages.

-f

forces initialization of a device or database. You must use both `-b` and `-w` to use `-f`.

-G

specifies the name of the event log server.

-g

turns off event-logging.

-H

starts the high availability (HA) server, if you have the HA feature installed on your SAP ASE server.

-i<interfaces_file_directory>

specifies the directory location of the interfaces file to search when connecting an SAP ASE server. If `-i` is omitted, `sqlsrvr` looks for a file named `interfaces` in the directory pointed to by your SYBASE environment variable.

- h**
prints this help message, then exists.
- K<keytab_file>**
specifies the path to the keytab file used for authentication in DCE.
- L<config_file_name_for_connectivity>**
specifies the name the configuration file for connectivity.
- M <sharedmem_directory>**
places shared memory files in the specified directory instead of in the default location, %SYBASE%. If <sharedmem_directory> starts with "\", the directory name is assumed to be absolute. Otherwise, the directory name is interpreted relative to %SYBASE%.
- m**
starts an SAP ASE server in single-user mode.
- master_key_password [=<password>]**
specifies the master key password when you provide the <password> on the command line or prompts for a master key password during SAP ASE startup. The password characters do not appear, and the password is not validated until later in the SAP ASE startup sequence.

If you include the password on the command line, it is visible until the memory is read and used.
- p<sso_login_name>**
specifies the login name of a system security officer when starting an SAP ASE server, for the purposes of getting a new password for that account. The SAP ASE server generates a random password, displays it, encrypts it, and saves it in `master..syslogins` as that account's new password.
- q**
treats quiesced databases as "in recovery."
- r<mastermirror>**
starts the mirror of the master device. Use this parameter to start the SAP ASE server if the master device has been damaged.
- s<servername>**
specifies the name of the SAP ASE server to start. If `-s` is omitted, a server named SYBASE is started.
- T<trace_flag>**
- u<sa/sso_name>**
specifies the system administrator or system security officer's name you want to unlock.
- v**
prints the version number and copyright message for `sqlservr` and then exits.
- w <master> | <model_database>**
specifies whether you want to write a master or model database.

-x

starts this server as `sybmon`, not `dataserver`.

-y [**<password>**]

allows you to assign a password for the encrypted private key, so that the server prompt the user for a password. This password should match the password you used to encrypt the private key when it was created. You cannot use this parameter when you are running the server in the background.

i Note

Although you can a password with `-y`, for security reasons SAP strongly discourages you from doing so.

A private key is included with your server's digital certificate. By default, the certificate file located:

```
%SYBASE%\%SYBASE_ASE%\certificates\<servername>.crt
```

The location of the certificate file changes if you invoke the `sp_ssladmin addcert` command.

-z **<page_size>**

specifies the page size of the server. Use `-b` and `-w` to use this flag, and name an even power of two between 2k and 16k, or else the server does not boot.

Examples

Create new installation

Creates a new installation with a 100MB master device and a 4k page:

```
sqlsrvr -d d_master -z 4k -b 100.02M
```

The spaces between options and their following arguments are optional and acceptable. This example specifies "100.02M" for a 100MB master device because the server requires 16KB of overhead for its configuration area.

Rewrite a corrupt master

Rewrites a corrupt `model` database:

```
sqlsrvr -d d_master -w model
```

To rewrite a corrupt `master` database specifying device size:

```
sqlsrvr -d d_master -w master -z 4k
```

To rewrite a corrupt `master` database, specifying device and page sizes, forcing the server to accept these values in preference to what it may find in the config block:

```
sqlsrvr -d d_master -w master -z 4k -b 100.02M -f
```


To rewrite a corrupt `master` database, specifying a page size that does not match what the server finds in its config block, which produces a failure:

```
sqlsrvr -d d_master -w master -z 8k
00:00000:00000:2001/01/19 12:01:26.94 server The
configured server page size does not match that
specified on the command line. To use the configured
size, omit the command line size; to use the command
line size, specify 'force' (-f).
```

To rewrite a corrupt `master` database, specifying an incorrect page size, even in a normal boot, which produces a failure:

```
sqlsrvr -d d_master -z4000
sqlsrvr: the 'z' flag may not be used without 'b' or
'w'. sqlsrvr: server will ignore the 'z' flag. sqlsrvr:
the 'z' flag contained an invalid page size. sqlsrvr:
the page size must be an even power of two between 2048
and 16384 bytes, inclusive.
```

Permissions

Anyone with execute permission on the binary, and who has read/write access to all the files.

Tables used

`sysconfigures`

Related Information

[startserver \[page 170\]](#)

[Utilities to Start Servers \[page 11\]](#)

2.30.1 Usage for sqlsrvr

Usage considerations for `sqlsrvr`.

- The `sqlsrvr` utility is referred to as `dataserver` in other Sybase documents.
- Start the server using the `services` manager utility rather than by executing the `sqlsrvr` program directly. If you need to change any of the default parameters, edit the SAP ASE Registry keys. See the configuration guide for your platform for details.

- An SAP ASE server derives its running environment from values in the `sysconfigures` system table. Run `sp_configure` to see the configuration values; use `sp_configure` and `reconfigure` to change the configuration.
- Because passwords are encrypted, you cannot recover forgotten passwords. If all system security officers lose their passwords, the `-p` parameter generates a new password for a system security officer's account. Start the server with `-p`, immediately log in to the SAP ASE server with the new random password, and execute `alter login` to reset your password to a more secure one.
- By default, the server logs error messages in both the local error log file and the local Windows event log. You can disable Windows event logging by including the `-g` parameter and specifying a different event-logging machine with `-G <machine_name>`. Use standard Windows conventions when entering the `<machine_name>`. For example, to designate a PC named "LOGSITE", substitute "\\LOGSITE" for the `<machine_name>`. See the configuration guide for your platform for details on logging error messages.
- After you have finished running the installer, set the file permissions on the `sqlsrvr` executable to limit who can execute it.
- If you do not specify a name with the `-s` parameter, and you have not set the `DSLISEN` environment variable, `sqlsrvr` uses the default SAP ASE name `SYBASE`. The value of the `DSLISEN` environment variable overrides this default value, and the `-s` parameter overrides both the default and the `DSLISEN` environment variable.
- Automatic login lockouts can cause a site to end up in a situation in which all accounts capable of unlocking logins (system administrators and system security officers) are locked. If this occurs, use the `sqlsrvr` utility with the `-u` parameter to check the specified login for system administrator or system security officer authorization, unlock the account, and reset the value of the current failed logins counter to zero.
- `-f` is only valid when used with `-b` and/or `-w`. The server fails to boot if you use `-f` without either `-b` or `-w`. `-f` forces the server in different ways, depending whether `-w` is present. See `-b` and `-w` below.

See also:

- *Reference Manual: Commands* – `disk mirror`, `disk remirror`, `reconfigure`, `create login`, `alter login`
- *Reference Manual: Procedures* – `sp_configure`

2.30.1.1 Starting an SAP ASE Server

There are two methods to start an SAP ASE server with a specified configuration file.

Procedure

Use either method to start an SAP ASE server:

- Use Server Config to configure the server to have the `-c` parameter. In the Configure SAP ASE window, select the Command Line option, and in the Command Line Parameters window, enter:

```
-C<configuration_file_pathname>
```

For example, entering `-chaze.cfg` starts the server using the `haze.cfg` configuration file.

- Start SAP ASE from the command line and provide the `-c` parameter.

2.30.1.2 startsrvr Dependencies and Conditions with -b and -w

The effect of `-b` changes, depending on whether `-w` is present.

- `-b` without `-w` creates a new master device as named by `-d` (the default is `d_master`) and with the page size as specified by `-z` (the default is 2048). If the named device:
 - Already exists as an OS file, the attempt fails, and you must remove the existing file and try again.
 - Names an existing raw partition, the attempt fails unless you include the `-f` flag. This reinitializes the raw partition as a server master device.
- `-b` with `-w master` tells `dataserver` to use the size specified in `-z` for the master device when re-creating the master database. It implies nothing about creating a new device.

`-w` may or may not require additional flags. If you use:

- `-w model` – the `-z` and `-b` flags are accepted but ignored.
- `-w master` for **new** installations – the `-z` and `-b` parameters are not required because the device size information is stored in the `config_block`.
- `-w master` to **upgrade** older installations:
 - The server requires `-b` and/or `-z` if the `config_block` does not contain a valid entry for the associated sizes. The command fails if it can't get valid data for the page size or device size.
 - You may provide `-b` and/or `-z` when the `config_block` contains valid entries for the sizes they represent. However if the sizes do not match what is in the `config_block`, add `-f` to force your new size preferences.
 - `-f` may appear without either `-b` or `-z`, because `-f` also instructs the server to accept damaged allocation pages as belonging to the `master` database. This is useful for restoring badly corrupted databases. If you specify `-w master -f`, the server assigns to the `master` database every allocation page on the named master device that does not belong to some other database than `master`.

2.31 sqlupgrade

(UNIX only) Upgrades your currently installed version of SAP ASE to the newest release using a GUI.

The utility is located in `$SYBASE/$SYBASE_ASE/bin`.

Syntax

```
sqlupgrade
  [-s <sybase dir>]
  [-r <resource file>]
```

```
[-D <data_directory>]
```

Or

```
sqlupgrade -v
```

Parameters

-r <resource file>

executes the specified resource file.

-s <sybase dir>

specifies the value to use for the SYBASE environment variable.

-D<data_directory>

(optional) specifies the working directory when it differs from the default installation directory for the SAP ASE server. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use `-D`, the SAP ASE server uses `$SYBASE` as the default.

-v

prints the version number and copyright message for `sqlupgrade` and then exits.

Usage

Set the:

- SYBASE environment variable to the location of the current version of SAP ASE before using `sqlupgrade`.
- DISPLAY environment variable before invoking `sqlupgrade`, unless you are only using the `-v` parameter to display the version number.

See also:

- The installation guide for your platform

Permissions

You must be a Sybase system administrator to use `sqlupgrade`.

Related Information

[preupgrade \[page 130\]](#)

[sqlupgraderes \[page 165\]](#)

2.32 sqlupgraderes

(UNIX only) Upgrades your currently installed release of SAP ASE to the newest release using resource files.

The utility is located in `$SYBASE/$SYBASE_ASE/bin`.

Syntax

```
sqlupgraderes
  [-s <sybase dir>]
  [-r <resource file>]
  [-D <data directory>]
```

Or

```
sqlupgraderes -v
```

Parameters

-r <resource_file>

executes the specified resource file.

-s <sybase_dir>

specifies the value to use for the SYBASE environment variable.

-D<data_directory>

(optional) specifies the working directory when it differs from the default installation directory for an SAP ASE server. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use `-D`, the SAP ASE server uses `$SYBASE` as the default.

-v

prints the version number and copyright message for `sqlupgraderes` and then exits.

Usage

Set the SYBASE environment variable to the location of the current version of SAP ASE before using `sqlupgraderes`.

See also:

- The installation guide for your platform
- The configuration guide for your platform – *"Configuring New Servers with srvbuild"*
- *System Administration Guide – "Managing Adaptive Server Logins, Database Users, and Client Connections"*

Permissions

You must be a Sybase system administrator to use `sqlupgraderes`.

Related Information

[sqlupgrade \[page 163\]](#)

[Installation or Configuration Utilities \[page 9\]](#)

2.33 srvbuild

(UNIX only) Creates a new SAP ASE server, Backup Server, or XP Server with default or user-specified values for key configuration attributes. Use `srvbuild` in either GUI or non-GUI mode.

The utility is located in `$SYBASE/$SYBASE_ASE/bin`.

Syntax

```
srvbuild
  [-s< sybase_dir>]
  [-I <interfaces_file>]
  [-r <resource_file>]
  [-D <user_data_directory>]
```

Or

```
srvbuild -v
```

Parameters

-I <interfaces_file>

specifies the name and location of the interfaces file to search when connecting to an SAP ASE server.

-s <sybase_dir>

specifies the value to use for the SYBASE environment variable.

-r <resource_file>

executes the specified resource file.

-D<user_data_directory>

(optional) specifies the working directory when it differs from the default installation directory for an SAP ASE server. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use `-D`, the SAP ASE server uses `$SYBASE` as the default.

-v

prints the version number and copyright message for `srvbuild` and then exits.

Permissions

You must be a Sybase system administrator to use `srvbuild`.

Related Information

[srvbuildres \[page 168\]](#)

[Installation or Configuration Utilities \[page 9\]](#)

2.33.1 Usage for `srvbuild`

Set the SYBASE environment variable.

- To the location of the current version of SAP ASE before using `srvbuild`.
- Before invoking `srvbuild`, unless you are only using the `-v` parameter to display the version number.

See also:

- The installation guide for your platform

2.33.1.1 Using LDAP with `srvbuild` in a 64-bit Environment

When you use `srvbuild` to build a new server using a Lightweight Directory Access Protocol (LDAP) service in a 64-bit environment, edit the LDAP server entry.

`srvbuild` is a 32-bit application and uses the LDAP server entry from the `$SYBASE/$SYBASE_OCS/config/libtcl.cfg` file. SAP ASE is a 64-bit application and uses the LDAP server information from the `$SYBASE/$SYBASE_OCS/config/libtcl64.cfg` file.

Do not include any blank spaces after the LDAP server entry in the `libtc1.cfg` or `libtc164.cfg` files; these prevent `srvbuild` from connecting to the LDAP server.

2.34 `srvbuildres`

(UNIX only) Creates, using resource files, a new SAP ASE server, Backup Server, or XP Server with default or user-specified values for key configuration attributes.

The utility is located in `$SYBASE/$SYBASE_ASE/bin`.

Syntax

```
srvbuildres
  [-s <sybase_dir>]
  [-I <interfaces_file>]
  [-r <resource_file>]
  [-D <user_data_directory>]
```

Or

```
srvbuildres -v
```

Parameters

-I <interfaces_file>

specifies the name and location of the interfaces file to search when connecting to an SAP ASE server.

-r <resource_file>

executes the specified resource file.

-s <sybase_dir>

specifies the value to use for the SYBASE environment variable.

-D<user_data_directory>

(optional) specifies the working directory when it differs from the default installation directory for the SAP ASE server. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use `-D`, SAP ASE uses `$SYBASE` as the default.

-v

prints the version number and copyright message for `srvbuildres` and then exits.

Usage

Set the SYBASE environment variable to the location of the current version of SAP ASE before using `srvbuildres`.

The `$$SYBASE/$$SYBASE_ASE/init/sample_resource_files` directory contains these sample resource files:

- `sqlloc.rs*`
- `sqlupgrade.adaptive_server.rs*`
- `sqlupgrade.backup_server.rs*`
- `sqlupgrade.monitor_server.rs*`
- `srvbuild.adaptive_server.rs*`
- `srvbuild.backup_server.rs*`
- `srvbuild.job_scheduler.rs*`
- `srvbuild.monitor_server.rs*`
- `srvbuild.text_server.rs*`
- `srvbuild.xp_server.rs*`

The sample resource file from an SAP ASE installation looks similar to:

```
sybinit.release_directory: USE_DEFAULT
sqlsrv.server_name: PUT_YOUR_SERVER_NAME_HERE
sqlsrv.sa_login: sa
sqlsrv.sa_password:
sqlsrv.default_language: USE_DEFAULT
sqlsrv.language_install_list: USE_DEFAULT
sqlsrv.language_remove_list: USE_DEFAULT
sqlsrv.default_character_set: USE_DEFAULT
sqlsrv.character_set_install_list: USE_DEFAULT
sqlsrv.character_set_remove_list: USE_DEFAULT
sqlsrv.sort_order: USE_DEFAULT
# An example sqlloc resource file...
# sybinit.release_directory: USE_DEFAULT
# sqlsrv.server_name: PUT_YOUR_SERVER_NAME_HERE
# sqlsrv.sa_login: sa
# sqlsrv.sa_password:
# sqlsrv.default_language: french
# sqlsrv.language_install_list: spanish,german
# sqlsrv.language_remove_list: USE_DEFAULT
# sqlsrv.default_character_set: cp437
# sqlsrv.character_set_install_list: mac,cp850
# sqlsrv.character_set_remove_list: USE_DEFAULT
# sqlsrv.sort_order: dictionary
```

See also:

- The installation guide for your platform

Permissions

You must be a Sybase system administrator to use `srvbuildres`.

Related Information

[srvbuild \[page 166\]](#)

[Installation or Configuration Utilities \[page 9\]](#)

2.35 startserver

(UNIX only) Starts an SAP ASE server or a Backup Server.

The utility is located in `$SYBASE/$SYBASE_ASE/bin`.

Syntax

```
startserver [[-f <runserverfile>] [-m]] ...
```

Parameters

-f <runserverfile>

specifies the relative path name of a runserver file, which is used as a reference each time you start an SAP ASE server or Backup Server. By default, the runserver file is in the current directory and is named `RUN_servername`. If you start a second SAP ASE server on the same machine, `startserver` creates a new runserver file named `RUN_servername`.

-m

starts an SAP ASE server in single-user mode, allowing only one system administrator to log in, and turns the `allow updates to system tables` configuration parameter on. Use this mode to restore the `master` database. The system administrator can use the `dbo use only` parameter of `sp_dboption` for system administration activities that require more than one process, such as bulk copying or using the data dictionary. `startserver` normally starts up only one server per node.

The `-m` parameter creates an `m_RUNSERVER` file and overwrites any existing `m_RUNSERVER` file.

Examples

Start an SAP ASE server

Starts an SAP ASE server named SYBASE from the runserver file named `RUN_servername` in the current directory:

```
startserver
```

Start an SAP ASE server and Backup Server

Starts an SAP ASE server named MYSERVER and a Backup Server named SYB_BACKUP:

```
startserver -f RUN_MYSERVER -f RUN_SYB_BACKUP
```

Start Backup Server

Starts only the Backup Server SYB_BACKUP:

```
startserver -f RUN_SYB_BACKUP
```

Related Information

[backupserver \[page 22\]](#)

[dataserver \[page 53\]](#)

[Utilities to Start Servers \[page 11\]](#)

2.35.1 Usage for startserver

Take usage information into consideration when running `startserver`.

- `startserver` uses the information in the runserver file to start an SAP ASE server or Backup Server. The master device must be writable by the user who starts the SAP ASE server. The `startserver` command creates the SAP ASE error log file (named `errorlog`) in the directory where the server is started, and adds this information as part of the `-e` parameter in the SAP ASE executable line in the runserver file. If a second SAP ASE server is started on the same machine, a new error log named `errorlog_servername` is created; this information is added to that server's runserver file. The user must have execute permission on the specified runserver file.
- Start multiple servers by specifying more than one runserver file, as shown in example 2. Specify `-m` after each `-f <runserverfile>`.
- The SAP ASE server derives its running environment from values in the `config` file. Run `sp_configure` or edit the `config` file to see or change configuration parameters.
- To ensure the integrity of your SAP ASE server, it is important that you apply appropriate operating-system protections to the `startserver` executable and the runserver file.

See also:

- *Reference Manual: Commands* – `disk mirror`, `disk remirror`, `disk unmirror`

2.35.1.1 The Runserver File

The runserver file, which is created by `srvbuild` during installation, contains the `dataserver` command to start an SAP ASE server or the `backupserver` command to start Backup Server.

By default, the file is in the current directory and is named `RUN_servername`. Edit the runserver file to correct the options and parameters for the commands. This example shows two sample runserver files.

Runserver file for server MYSERVER:

```
#!/bin/sh
#
# Adaptive Server Information:
# name: /MYSERVER
# master device: /remote/Masters/myserver_dat
# master device size: 10752
# errorlog: /remote/serverdev/install/errorlog
# interfaces: /remote/serverdev/interfaces
#
#
/$SYBASE/$SYBASE_ASE/bin/dataserver -d/remote/Masters/myserver_dat \
-sMYSERVER -e/remote/serverdev/install/MYSERVER_errorlog \
-i/remote/serverdev &
```

Runserver file for Backup Server SYB_BACKUP:

```
#!/bin/sh
#
# Backup Server Information:
# name: SYB_BACKUP
# errorlog: /remote/serverdev/install/backup.log
# interfaces: /remote/serverdev/interfaces
# location of multibuf: /remote/serverdev/bin/sybmultbuf
# language: us_english
# character set: iso_1
# tape configuration file: /remote/serverdev/backup_tape.cfg
#
#
/remote/serverdev/bin/backupserver -SSYB_BACKUP \
-e/remote/serverdev/install/backup.log \
-I/remote/serverdev/interfaces \
-M/remote/serverdev/bin/sybmultbuf -Lus_english -Jiso_1 \
-c/remote/serverdev/backup_tape.cfg
```

2.36 sybatch

(Windows only) Creates a new SAP ASE server, Backup Server, or XP Server with default or user-specified values for key configuration attributes, as well as installs and modifies languages, character sets, and sort order defaults for SAP ASE.

The `sybatch` utility is the command-line version of the `syconfig` GUI utility, designed for batch mode and driven by resource files.

The `sybatch` executable file is located in the `%SYBASE%\%SYBASE_ASE%\bin\sybatch.exe` directory.

Syntax

```
sybatch
  [-c <charset>]
  [-h]
  [-l <language>]
  [-log <log_file>]
  [-s <release_directory>]
  [-v]
  [-D <user_data_directory>]
  [-I <interfaces_file>]
  -r <resources_file>
```

Parameters

-c <charset>

Specifies the character set.

-h

Prints help information for `sybatch` then quits.

-l <language>

Specifies the language you want to use for the SAP ASE server.

-log <log_file>

Specifies the name and location of the log file for `sybatch`.

-s <release_directory>

Specifies the name and location of the SAP ASE directory.

-v

Prints the version number then quits.

-D <user_data_directory>

(optional) specifies the working directory when it differs from the default installation directory for the SAP ASE server. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use `-D`, the SAP ASE server uses `%SYBASE%` as the default.

-I <interfaces_file>

Specifies the name and location of the interfaces file for the SAP ASE server.

-r <resources_file>

specifies the name and location of the resources file for the SAP ASE server.

Examples

Example 1

Specifies a resource file called `myase`:

```
sybatch.exe -r myase.res
```

Usage

If you do not want to include the login and password in the resources file (for security reasons, for example), you can set them in the `SYBASE_ASE_SA_USER` and `SYBASE_ASE_SA_PWD` environment variables.

Permissions

You must be a Sybase System Administrator or log in with the `sa_role` to use `sybatch`.

2.37 sybcluster

Manages a Sybase shared-disk cluster. `sybcluster` lets you create, start, stop, and manage a cluster or any instance in a cluster.

`sybcluster` is available only in a shared-disk cluster environment. For information about how to use `sybcluster`, see the *Clusters Users Guide*.

Syntax

```
sybcluster
[ -C <cluster_name> ]
[ -d <discovery_list >]
[ -F <agent_connection> ]
[ -h ]
[ -I <instance_name> ]
[ -i <input_file_path> ]
[ -L ]
[ -m <message_level> ]
[ -P [ <password> ]]
[ -U <user_name> ] (the default value is "uafadmin")
[ -v ]
```

Parameters

-C **<cluster_name>**

is the unique name of the Sybase shared-disk cluster to be managed. `sybcluster` looks up the name in the cluster directory or uses agent discovery services.

-d **<discovery_list>**

specifies the discovery services to be used to discover a shared-disk cluster agent and the discovery order. The format is:

```
"method[ (<method_specification>] [, ...)"]]
```

For example:

```
-d "udp(),jini(jinihost1;jinihost2)"
```

The supported discovery methods are:

- `UDP ()` – performs a UDP broadcast and listens for a response from listening agents. UDP discovery does not cross subnet boundaries.
- `JINI (<JINI_spec>)` – specifies the JINI servers used to look up the locations of nodes in the cluster. The specification form is: `<host-name>[:<port_num>]`. Indicate multiple JINI servers by placing a semicolon between each specification. By default, `sybcluster` uses port number 4160 to attach to a JINI server. The JINI server must be running, and the management agents (UAF) must be registered with the JINI server. The locations of the nodes, and status of the instances are stored on the JINI server.
- `LDAP (<LDAP_spec>)` – specifies an LDAP server that will be used to look up the locations of the nodes in the cluster. The specification form is: `<host_name>[:<port_num>][?<registry>]`. Indicate multiple LDAP servers by placing a semicolon between each specification. By default, `sybcluster` uses port number 389 to attach to an LDAP server and the LDAP directory at “cn=ua-registry,ou=ua,dc=sybase,dc=com”.

-F **<agent_connection>**

specifies the agent to be used to access the cluster. The format is:

```
<host_name>[:<port_num>] [, <host_name>[:<port_num> ]]
```

For example:

```
-F "node1,node2,node3,node4:9999"
```

The default port number is 9999.

-h

displays `sybcluster` syntax and lists supported interactive commands.

-I **<instance_name>**

specifies the instance to be accessed. If you do not specify the `-I` option when you execute `sybcluster`, you may need to specify it when entering certain interactive commands. `sybcluster` uses this name to discover the remote host, and as a default

when executing interactive commands. If an interactive command affects multiple instances, the instance identified by `-I`, if available, is used as the priority connection.

To override the instance specified by `-I`, execute the `use` command in interactive mode.

`-i`

specifies an operating system file for input to `sybcluster`. This file contains `sybcluster` commands, one command per line. The final command in the file should be `quit`.

`-I`

creates a `sybcluster.log` file. `sybcluster` writes all messages to this file irrespective of the message level set by the `-m` option.

`-m <message_level>`

specifies which `sybcluster` and agent messages are displayed on the client console. Message levels are:

- 0 – off (no messages to log file or console)
- 1 – fatal
- 2 – error
- 3 – warning
- 4 – information
- 5 – debug

`sybcluster` displays all messages of the level you choose and all messages of greater severity (with lower numbers). That is, if you select message level 3, `sybcluster` displays messages of level 3, 2, and 1. The default level is 4.

`-P [<password>]`

is the management agent password.

If you do not specify the `-P` option, `sybcluster` prompts for a password. For a blank or null password, use the `-P` option without a value or enter a set of quotation marks without content.

You can encrypt the password using the `passencrypt` utility. See the *Clusters Users Guide*.

`-U <user_name>`

is the management agent login name. See the `-P` description.

`-v`

displays the `sybcluster` version number and other information.

Examples

Start using direct connect

Starts `sybcluster` using direct connect and port numbers:

```
sybcluster -U uafadmin -P -C mycluster
```



```
-F "blade1:9100,blade2:9292,blade3:9393"
```

To start `sybcluster` using direct connect and default port numbers:

```
sybcluster -U uafadmin -P -C mycluster  
-F "blade1,blade2,blade3"
```

Use discovery to start

You can also start `sybcluster` using discovery.

```
sybcluster -U uafadmin -P -C mycluster  
-d "JINI(myjiniserver:4564)"
```

Usage

The recommended method for starting `sybcluster` and connecting to a cluster is:

```
sybcluster -U <login_name> -P <password> -C <cluster_name>  
-F <agent_spec>
```

The `-C <cluster_name>`, `-P <password>`, `-I <instance_name>`, `-F <agent_connection>`, and `-d <discovery_list>` parameters are default values that can be changed using subsequent `sybcluster` interactive commands. If you do not specify these values on the `sybcluster` command line, `sybcluster` prompts for them as they are required.

You can also start `sybcluster` and then use the interactive connect command to connect to the cluster. For example:

```
sybcluster  
> connect to mycluster login uafadmin password " "  
agent "blade1,blade2,blade3"
```

Related Information

[Interactive sybcluster Commands Reference \[page 306\]](#)

[Utility to Manage a Cluster \[page 13\]](#)

[Interactive sybcluster Commands Reference \[page 306\]](#)

2.38 syconfig

(Windows only) A GUI version of `sybatch`, `syconfig` creates a new SAP ASE server, Backup Server, or XP Server with default or user-specified values for key configuration attributes, as well as installs and modifies languages, character sets, and sort order defaults for SAP ASE.

The `syconfig` executable file is located in the `%SYBASE%\%SYBASE_ASE%\bin\syconfig.exe` directory.

Syntax

See `sybatch`.

Related Information

[sybatch \[page 172\]](#)

2.39 sybdiag

`sybdiag` is a Java-based tool that collects comprehensive data related to your SAP ASE configuration and environment. Support uses this information to diagnose server issues and expedites related user escalations.

i Note

- Run `sybdiag` on the same machine as the SAP ASE server you'd like to monitor.
- If SSL is enabled on the SAP ASE server you want to monitor, perform the following steps to first enable `sybdiag` on it:
 1. Import the public key into the JRE truststore. For example:

```
$$SAP_JRE7/bin/keytool -import -keystore  
$$SAP_JRE7/lib/security/cacerts -storepass changeit -file  
$$SYBASE/$SYBASE_ASE/certificates/ASEname.txt
```

You can import the key either from `$$SYBASE/$SYBASE_ASE/certificates/ASEname.txt` or from `$$SYBASE/config/trusted.txt`.

`trusted.txt` contains multiple keys, and when it is imported, the certificate entry listed first in it is the only one that is imported. Thus, ensure that the first key listed there is for your SAP ASE server.

2. Indicate `ssl:` as a prefix in the `-s` option when connecting to the SAP ASE server. For example:

```
sybdiag -U<username> -P<password> -S ssl:<servername>
```

Syntax

```
sybdiag -U <username>  
[-P <password>]  
[-S [ssl:] [<server_name> | <host>:<port>]]  
[-I <interfaces_file>]  
[-L <log_file>]  
[-N <num_threads>]  
[-O <output_directory>]  
[-R <resource_file>]
```

```
[-T <feature_list>]
[-h]
[-m <message_level>]
[-D <user_data_directory>]
[-v]
```

Parameters

-I <interfaces_file>

(optional) specifies the name of the interfaces file. If `-I` is specified, `sybdiag` uses the `<interfaces_file>` specified and displays an error if that file is not found. If `-I` is not specified, `sybdiag` first checks the LDAP server for the server entry, and if the entry is not found, it uses the default `interfaces` file in the directory specified by the SYBASE environment variable.

-L <log_file>

(optional) specifies the name of the log file that `sybdiag` creates. If `<log_file>` is not an absolute path, the log file is created in the directory where `sybdiag` is executed.

Whether you specify this parameter or not, `sybdiag` creates a default log file called `sybdiag.log` in the `.zip` output file.

-N <num_threads>

(optional) specifies the maximum number of parallel threads that `sybdiag` executes in parallel. The default value is 5. Do not change the default value unless you cannot execute parallel collections.

-O <output_directory>

(optional) specifies the name of a local directory that stores the output for `sybdiag`. If not specified, `sybdiag` creates the output `.zip` file in the directory where the command was executed. The output file is named "`sybdiag-<<server name>>-<<datetime stamp>>.zip`".

-R <resource_file>

(optional) specifies the resource file that `sybdiag` uses during start-up. Use this option under the supervision of SAP Support.

-P <password>

specifies your SAP ASE password. If you do not specify the `-P` flag, `sybdiag` prompts for a password. If your password is NULL, use the `-P` flag without any password.

-S [`ssl:`]<server_name> | <host>:<port>

`ssl:` specifies that the SAP ASE server to which `sybdiag` connects is SSL enabled. If you connect to an SSL-enabled SAP ASE server by not specifying `ssl:`, the server returns an error. If the server is not SSL-enabled, do not specify `ssl:`.

`<server_name>` specifies the name of the SAP ASE server to which `sybdiag` connects. `sybdiag` looks for this name in the interfaces file or the LDAP directory.

If you specify `-S` with no argument, `sybdiag` looks for a server named SYBASE. If you do not specify `-S`, `sybdiag` looks for the server specified in the DSQUERY environment variable definition.

`<host>:<port>` specifies the machine name and the port number.

-T <feature_list>

(optional) specifies the type of diagnostic data that `sybdiag` gathers, based on the following `<feature_list>` values:

- `osdata` – operating system data.
- `asecore` – SAP ASE configuration data.
- `aseadd` – SAP ASE monitoring data.
- `keyfile` – information about SAP ASE and operating system files.

If you do not specify `-T`, `sybdiag` collects all types of diagnostic data.

-U <username>

specifies a case-sensitive login name.

-h

(optional) displays all help options.

-m <message_level>

(optional) displays different levels of error messages depending on the value of `<message_level>`:

- 0 – no messages.
- 1 – fatal errors only.
- 2 – all errors.
- 3 – warnings and all errors.
- 4 – (default) informational messages, warnings, and all errors.
- 5 – debug and informational messages, warnings, and all errors.

-D<user_data_directory>

(optional) specifies the working directory if it is different from the default installation directory for the SAP ASE server. Use this option during the SAP ASE installation. If you do not use `-D`, the SAP ASE server uses `$SYBASE` as the default user data directory.

-v

(optional) displays version information.

Examples

Example 1

Collects all SAP ASE diagnostics from `/work/ASEInstall/ASE-15_0/bin`, and creates an output file called `sybdiag-testserver-20110312024652.zip` in the same directory:

```
sybdiag -Usa -P -Stestserver
```

i Note

For readability, some lines have been omitted from this sample output.

```
Collecting data for "Adaptive Server Version" (ase_version) ...
```

```

Completed data collection for "Adaptive Server Version" (ase_version).
Collecting data for "Server License" (ase_license) ...
Completed data collection for "Server License" (ase_license).
Collecting data for "Adaptive Server Configuration" (ase_cfg) ...
Completed data collection for "Adaptive Server Configuration" (ase_cfg).
Collecting data for "Adaptive Server Non-default Configuration"
(ase_nondefault_cfg) ...
Completed data collection for "Adaptive Server Non-default
Configuration" (ase_nondefault_cfg).
...Lines deleted...
Collecting data for "Adaptive Server LDAP Configuration File" (ase_libtcl) ...
Completed data collection for "Adaptive Server LDAP Configuration File"
(ase_libtcl).
Collecting data for "Adaptive Server LDAP Configuration File (64bit)"
(ase_libtcl64) ...
Completed data collection for "Adaptive Server LDAP Configuration File
(64bit)" (ase_libtcl64).
Collecting data for "Virtual Memory Statistics" (os_vmstat) ...
Collecting data for "Adaptive Server General Performance Information"
(ase_sysmon) ...
Collecting data for "I/O Statistics" (os_iostat) ...
Collecting data for "CPU Statistics" (os_mpstat) ...
Completed data collection for "Virtual Memory Statistics" (os_vmstat).
Completed data collection for "I/O Statistics" (os_iostat).
Completed data collection for "CPU Statistics" (os_mpstat).
Completed data collection for "Adaptive Server General Performance
Information" (ase_sysmon).
Data collection statistics: 43 task(s) succeeded, 0 task(s) skipped, and
0 task(s) failed.
The collected data is stored as
/work/ASEInstall/ASE-15_0/bin/sybdiag-testserver-20110312024652.zip
Data collection completed.

```

Example 2

Collects basic SAP ASE configuration data from /work/ASEInstall/ASE-15_0/bin, and creates an output file called sybdiag-smmdi_9966-20110502202909.zip in the same directory:

```
sybdiag -Usa -P -Ssmmdi:9966 -Tascore
```

```

Collecting data for "Adaptive Server Version" (ase_version) ...
Completed data collection for "Adaptive Server Version" (ase_version).
Collecting data for "Server License" (ase_license) ...
Completed data collection for "Server License" (ase_license).
Collecting data for "Adaptive Server Configuration" (ase_cfg) ...
Completed data collection for "Adaptive Server Configuration" (ase_cfg).
Collecting data for "Adaptive Server Non-default Configuration"
(ase_nondefault_cfg) ...
Completed data collection for "Adaptive Server Non-default Configuration"
(ase_nondefault_cfg).
Collecting data for "Remote Server Configuration" (ase_remote_server)...
Completed data collection for "Remote Server Configuration"
(ase_remote_server).
Collecting data for "Adaptive Server Script Version" (ase_script_version) ...
Completed data collection for "Adaptive Server Script Version"
(ase_script_version).
Collecting data for "Adaptive Server Configuration Monitor" (ase_mon_cfg) ...
Completed data collection for "Adaptive Server Configuration Monitor"
(ase_mon_cfg).
Collecting data for "Adaptive Server Cache Configuration" (ase_cache_cfg) ...
Completed data collection for "Adaptive Server Cache Configuration"
(ase_cache_cfg).
Collecting data for "Adaptive Server Pool Configuration" (ase_pool_cfg) ...
Completed data collection for "Adaptive Server Pool Configuration"
(ase_pool_cfg).
Collecting data for "Adaptive Server Shared Memory Dump Configuration"

```

```
(ase_shmdumpconfig) ...
Completed data collection for "Adaptive Server Shared Memory Dump
Configuration" (ase_shmdumpconfig).
Collecting data for "Adaptive Server Traceflags and Switches"
(ase_switches) ...
Completed data collection for "Adaptive Server Traceflags and Switches"
(ase_switches).
Data collection statistics: 11 task(s) succeeded, 0 task(s) skipped, and
0 task(s) failed.
The collected data is stored as /work/ASEInstall/ASE-15_0/bin/sybdiag
smmdi_9966-20110502202909.zip
Data collection completed.
```

Example 3

Collects basic SAP ASE configuration data from an SSL enabled ASE server.

1. (Optional) Check the interface file entries:

```
/work/ase160sp03plx/release/smp> cat interfaces
ase160sp03plx
  master tcp ether mo-f09cd5f54 10241 ssl="CN=ase160sp03plx"
  query tcp ether mo-f09cd5f54 10241 ssl="CN=ase160sp03plx"
```

2. Import public keys:

```
/work/ase160sp03plx/release/smp>
$$SAP_JRE7/bin/keytool -import -keystore
$$SAP_JRE7/lib/security/cacerts -storepass changeit -file
$$SYBASE/$SYBASE_ASE/certificates/ase160sp03plx.txt
```

```
Owner: CN=ase160sp03plx, O=SAP, L=dublin, ST=CA, C=US, OU=SAP
Issuer: CN=ase160sp03plx, O=SAP, L=dublin, ST=CA, C=US, OU=SAP
Serial number: 42a6ca0f
Valid from: Thu Sep 19 02:06:18 PDT 2019 until: Sun Sep 16 02:06:18 PDT
2029
Certificate fingerprints:
MD5: 00:B0:B2:A0:FE:99:5F:13:78:4E:87:BB:69:3A:8E:2E
SHA1: 64:35:67:29:15:4C:AE:3F:C9:91:04:4F:E1:98:3D:3C:E7:8C:CE:DB
SHA256: 04:B3:07:A3:77:B4:42:A8:79:69:00:61:E1:27:98:DE:FE:8C:
37:7F:D3:9D:E6:02:97:05:F7:55:4A:2C:6F:08
Signature algorithm name: SHA256withRSA
Version: 3
Extensions:
#1: ObjectId: 2.5.29.19 Criticality=true
BasicConstraints:[
CA:true
PathLen:2147483647
]
#2: ObjectId: 2.5.29.14 Criticality=false
SubjectKeyIdentifier [
KeyIdentifier [
0000: 69 EF 57 56 A6 62 8B 61 23 16 E9 9F 77 D9 A7 97 i.WV.b.a#...w...
0010: 8E D8 9B 08 ....
]
]
Trust this certificate? [no]: yes
Certificate was added to keystore
```

3. Collects all SAP ASE diagnostics:

```
/work/ase160sp03plx/release/smp>
$$SYBASE_ASE/bin/sybdiag -Usa -P -Sssl:ase160sp03plx -I./interfaces -
Tasecore
```

```

Collecting data for "Adaptive Server Version" (ase_version) ...
Completed data collection for "Adaptive Server Version" (ase_version).
Collecting data for "Server License" (ase_license) ...
Completed data collection for "Server License" (ase_license).
Collecting data for "Adaptive Server Configuration" (ase_cfg) ...
Completed data collection for "Adaptive Server Configuration" (ase_cfg).
Collecting data for "Adaptive Server Non-default Configuration"
(ase_nondefault_cfg) ...
Completed data collection for "Adaptive Server Non-default Configuration"
(ase_nondefault_cfg).
Collecting data for "Remote Server Configuration" (ase_remote_server) ...
Completed data collection for "Remote Server Configuration"
(ase_remote_server).
Collecting data for "Adaptive Server Script Version"
(ase_script_version) ...
Completed data collection for "Adaptive Server Script Version"
(ase_script_version).
Collecting data for "Adaptive Server Configuration Monitor"
(ase_mon_cfg) ...
Completed data collection for "Adaptive Server Configuration Monitor"
(ase_mon_cfg).
Collecting data for "Adaptive Server Cache Configuration"
(ase_cache_cfg) ...
Completed data collection for "Adaptive Server Cache Configuration"
(ase_cache_cfg).
Collecting data for "Adaptive Server Pool Configuration" (ase_pool_cfg) ...
Completed data collection for "Adaptive Server Pool Configuration"
(ase_pool_cfg).
Collecting data for "Adaptive Server Shared Memory Dump Configuration"
(ase_shmdumpconfig) ...
Completed data collection for "Adaptive Server Shared Memory Dump
Configuration" (ase_shmdumpconfig).
Collecting data for "Adaptive Server Traceflags and Switches"
(ase_switches) ...
Completed data collection for "Adaptive Server Traceflags and Switches"
(ase_switches).
Data collection statistics: 11 task(s) succeeded, 0 task(s) skipped, and 0
task(s) failed.
The collected data is stored as /work/ase160sp03plx/release/smp/sybdia-
ase160sp03plx-20191106212953.zip
Data collection completed.

```

Permissions

- To collect all SAP ASE data, you must have permission to access all datasources used by `sybdia`. In a default SAP ASE configuration, you must have `sa_role` and `mon_role` to collect SAP ASE configuration and monitoring data. Use `grant role` to grant `sa_role` and `mon_role` to the `sybdia` user. For example:

```
grant role sa_role <sybdia_user>
```

You may need other permissions to access database objects if your system administrator has changed the default access restrictions. If you have insufficient permission to access certain database objects, you see an error message that lists the database objects that you cannot access.

- To collect all environment data, you must have authorized access to operating system and device files.

i Note

(Linux) You must have read permission to access operating system messages in `/var/log/messages`.

- You must have read permissions on these files:
 - SAP ASE error log
 - SAP ASE configuration file
 - Environment scripts such as `SYBASE.csh`, `SYBASE.sh` or `SYBASE.bat`
- You must have write permissions on an output directory specified by the `-o` parameter.

i Note

If you do not have the required permissions on a file, `sybdiag` displays an error message and does not process that file.

Related Information

[Utilities to Gather Information \[page 12\]](#)

2.39.1 Usage for sybdiag

`sybdiag` connects to an SAP ASE server and executes stored procedures such as `sp_configure`, and queries to tables like `monLicense`. It collects operating system and platform diagnostic information by executing commands such as `ps`, `vmstat`, and `netstat`.

The output of `sybdiag` is a compressed ZIP file containing HTML and data files that can be uncompressed and viewed in a Web browser. The information collected includes operating system and environment data, SAP ASE configuration and monitoring data, and SAP ASE files and scripts.

`sybdiag` does not collect SAP ASE or operating system data for logins, passwords, or user lists, and does not collect information from application database tables.

2.39.1.1 Viewing sybdiag Output

The `sybdiag` output is in a compressed file in this format: `sybdiag-servername-datetimestamp.zip`.

To generate individual output files, uncompress the zip file. The ZIP file contains these HTML, data, and log files:

- `sybdiag_start.html` – an HTML file with links to diagnostic data files in the output directory. To view `sybdiag` output, open this file in any Web browser.
`sybdiag` displays information in these categories:
 - Operating system information, including process status, physical and virtual memory, interprocess communication, disk usage, I/O, and network information.

- SAP ASE configuration data, including server version, platform and license information, configuration values, remote server configuration data, and so on. For the Cluster Edition, this also includes the cluster overview, cluster instances, and logical cluster information.
- SAP ASE monitoring data about processes, databases, devices, locks, and so on. For the Cluster Edition, this also includes cluster interprocess communication protocol information, cluster lock usage, and cluster quorum device dump information.
- SAP ASE files such as `errorlog`, `interfaces`, configuration file, SySAM properties file, and environment configuration scripts. For the Cluster Edition, a single report may contain information from many external files for several cluster instances.
- Diagnostic data files – collected SAP ASE and environment information organized under different directories. These are the files that `sybdiag_start.html` accesses.
- Log file – by default, the ZIP file includes a log file called `sybdiag.log` that provides a log of the activities `sybdiag` performed.

2.39.1.2 Configuration Options for `sybdiag`

To generate certain reports, you must enable corresponding configuration options using `sp_configure`, or edit the server configuration file.

If configuration options are set incorrectly, `sybdiag` skips the related reports.

Option	Value	<code>sybdiag</code> Reports
<code>enable monitoring</code>	1	Adaptive Server Wait Events Adaptive Server Locks Adaptive Server Deadlock History
<code>wait event timing</code>	1	Adaptive Server Wait Events
<code>deadlock pipe active</code>	1	Adaptive Server Deadlock History
<code>deadlock pipe max messages</code>	Nonzero value; must be large enough to capture all relevant deadlock rows	Adaptive Server Deadlock History

2.40 `sybdumptran`

Use the `sybdumptran` utility to dump the most recent transactions when the database and the server have suffered a catastrophic failure.

`sybdumptran` generates a transaction log dump from the log pages contained in operating system files/raw devices, that were formerly used as a log device by a database in an SAP ASE environment. `sybdumptran` is located in:

- (UNIX) `$$SYBASE/$SYBASE_ASE/bin/`

- (Windows) %SYBASE%\%SYBASE_ASE%\bin as sybdumptran.exe

Syntax

```
sybdumptran [-m <file_name> | -g | -d <database_name> |  
            -f <first_page_num> ] -o <output_file> | -h <dump_history_file_name>
```

or:

```
sybdumptran --help
```

Parameters

-m <file_name>

specifies the location of the metadata file containing information needed by `sybdumptran` to dump the transaction log, including the path to the database log devices, and the layout of the log segment relative to these devices. It also contains sequencing information and the page number of the first page in the log. This metadata file can be:

- A file generated using the `-g` option; or,
- Preferably, the most recent full database dump or transaction log dump. Use the most recent database dump/transaction log to ensure that the information is current, including the location of the log segment relative to the rest of the database, the dump sequencing information, and the location of the active log within the log segment. If it is not possible to use the most recent backup, then use a backup that was taken when the database had the same layout as it currently has. This means that the sequencing information and log location will be incorrect. In this case, the `sybdumptran` utility automatically tries to determine the location of the active log, and the sequencing must be overridden when the transaction log is loaded using the `dump tran with override=sequence` command.

The long parameter option displays when you use `--help`, so you can use either `-m <filename>` or `--metadata-file=<filename>`.

-g

generates a compact metadata file from a database or transaction log dump. Specify the name of the output file using the `-o <output_file>` option. You can use the `-g` option only with the `-m` and `-o` options.

If the most recent database or transaction log dump is unavailable, or when you use `-g` to generate a metadata file, you can use an older database or transaction log dump as the information source for providing the layout of the database if it was identical at the time the dump was performed, to compare with the metadata file you just generated. The dump from which it is generated, however, should be the most recent.

The `-g` option to generate metadata is useful when the last database or transaction log dump is located on an entirely different system. The created metadata file is a subset of

the database dump or transaction log dump from which it was created, containing only the information needed by `sybdumptran`. Because it is smaller, it is easier to copy to the system on which you are creating the transaction log.

-d <database_name>

is the name of the database used to locate and add entries to the dump history file.

-h <dump_history_file_name>

used in combination with the `-d` option, adds an entry to the dump history file for the transaction log dump generated by `sybdumptran`. When you use `-h <dump_history_file_name>`, `sybdumptran` tries to locate the most recent dump that was taken, and uses this as its source of the metadata, obviating the need for the `-m` option.

The entry is generated for the database named by the `-d` option. No entry is added in the dump history file if this database has no existing entries.

i Note

You cannot use `-h` with the `-m <file_name>` option.

-f <first_page_num>

allows you to specify the first log page.

The `sybdumptran -m` option uses the metadata file to locate the first page of the log within the log devices. If the metadata file is not the most recent transaction log or database dump, then the first page of the log is incorrect, and `sybdumptran` automatically tries to locate the first page of the log. If this fails, and `sybdumptran` exits and reports that it cannot locate the first log page, use the `-f` option to manually specify the first log page.

sybdumptran --help

displays this long parameter format:

```
Usage: sybdumptran <option list>
Valid options:
  -d, --databasename=database_name      - name of database in
dump                                     dump
  -h, --dump history file=filename      - dump history file
name                                     history
  -f, --first-log-page=page_number      - to overwrite the
first                                    page from meta data
  -g, --generatemetadata                - create compact meta
                                         data file from dump
  -H, --help=[{0|1|2|3}[,display_width]] - print this help
                                         message, and exit
  -m, --metadatafile=filename           - meta data file used
                                         to locate devices
  -o, --outputfile=filename             - name of output file
  -V, --sbssav                          - print a short
version
  -T, --trace=number                    - string, and exit
                                         for debugging
  -v, --version                          - print version
message,                                 and exit
```

Examples

sybdumptran Example

Start with a database dump (/dumps/db.dmp), and two transaction logs (/dumps/db.trn1 and /dumps/db.trn2).

Use the last transaction log dump as a metadata file (-m for sybdumptran):

```
> sybdumptran -o /dumps/db.trn_sdt -m /dumps/db.trn2
Opening output-file '/dumps/db.trn_sdt'.
Opening metadata-file '/dumps/db.trn2'.
Opening log devices used by database:
  Opening device "db_log1", path "/sdcl_eng/devices/db.log1".
  Opening device "db_log2", path "/sdcl_eng/devices/db.log2".
Building run-lists using first log page=10888.
Finished building run-lists, number of log pages=7, first log page=10888,
  last log page=10894.
Dumping log pages to output file "/dumps/db.trn_sdt".
Finished dumping 7 log pages.
Sybdumptran completed without errors.
```

Load the database dump, the two transaction log dumps, and the dump generated by sybdumptran:

```
1> load database db from '/dumps/db.dmp'
2> go
1> load tran db from '/dumps/db.trn1'
2> go
1> load tran db from '/dumps/db.trn2'
2> go
1> load tran db from '/dumps/db.trn_sdt'
2> go
1> online database db
2> go
```

When you do not use the most recent dump as metadata file, the dump generated by sybdumptran contain the wrong sequence date. This example uses /dumps/db.trn1 as the metadata file:

```
> sybdumptran -o /dumps/db.trn_sdt -m /dumps/db.trn1
Opening output-file '/dumps/db.trn_sdt'.
Opening metadata-file '/dumps/db.trn1'.
Opening log devices used by database:
  Opening device "db_log1", path "/sdcl_eng/devices/db.log1".
  Opening device "db_log2", path "/sdcl_eng/devices/db.log2".
Building run-lists using first log page=10253.
Found new first log page=10888.
Restarting the building of run-lists.
Building run-lists using first log page=10888.
Finished building run-lists, number of log pages=7, first log page=10888,
  last log page=10894.
Dumping log pages to output file "/dumps/db.trn_sdt".
Finished dumping 7 log pages.
Sybdumptran completed without errors.
1> load database db from '/dumps/db.dmp'
2> go
1> load tran db from '/dumps/db.trn1'
2> go
1> load tran db from '/dumps/db.trn2'
2> go
1> load tran db from '/dumps/db.trn_sdt'
2> go
Backup Server session id is: 69. Use this value when executing the
'sp_volchanged'
```

```

system stored procedure after
...
Msg 4305, Level 16, State 1:
Server 'marslinux1_asecarina_smp', Line 1:
Specified file 'dump device' is out of sequence. Current time stamp is Nov 30
2012
1:59:59:423AM while dump was from Nov 30 2012 1:59:59:296AM.

```

To be able to load this dump, use the `override` option:

```

1> load tran db from '/dumps/db.trn_sdt'
2> with override = sequence
3> go
Backup Server session id is: 83. Use this value when executing the
'sp_volchanged'
system stored procedure after fulfilling any volume change request from the
Backup Server.
Backup Server: 6.28.1.1: Dumpfile name 'db1233501C1F
' section number 1 mounted on disk file '/dumps/db.trn_sdt'
Backup Server: 4.58.1.1: Database db: 22 kilobytes LOADED.
...
1> online database db
2> go
Started estimating recovery log boundaries for database 'db'.
...

```

Enable the dump history file:

```

1> sp_configure 'dump history filename', 1, '/dumps/dump_hist'
2> go
1> sp_configure 'enable dump history', 1
2> go

```

Dump database is then added to the history file:

```

1> dump database db to '/dumps/db.dmp'
2> go

```

Permissions

Any user who has read permissions on the log devices of the database, and write permission to the output file can use `sybdumptran`.

2.40.1 Usage for `sybdumptran`

There are additional considerations when using `sybdumptran`.

During a load sequence of a database dump and one or more transaction log dumps, SAP ASE verifies that the transaction log dump is loaded in sequence based on a sequence number stored in the dump header.

If you do not use the most recent dump as a metadata file for a transaction log dump generated by `sybdumptran`, the sequence number will be incorrect, causing the load of this transaction log dump to fail. The `load transaction` option with `override=sequence` ignores this error and allows the load of an out-of-sequence transaction log dump.

If the sequence number `sybdumptran` created for the dump does not match the new sequence number of the previous dump, restore the database using the `load tran` command with the `with override=sequence` option. You cannot use this option when loading transaction dumps created by SAP ASE, but only when loading transaction logs created with `sybdumptran`.

⚠ Caution

- When using the `override=sequence` option, make sure the transaction log to be loaded is indeed the next in the sequence. Since the sequence number is there to protect the sequence, overriding it means the task must be performed correctly. Loading a transaction log out of sequence can corrupt the database (for example, if an earlier dump transaction is omitted during the load, so that the load sequence would need to be repeated, this time, in the correct order).
- If a partially logged operation (such as `select into` without the `enable full logging for select into` database option) was done between the last transaction log that was dumped normally, and the transaction log that is created by `sybdumptran`, then a sequence error will not be reported during the load of the latter, even when using the most recent transaction log dump as a metadata file. Normally, a partially logged operation deliberately breaks the sequence to make sure that a subsequent dump transaction does not take place.

In such a case, do not load the dump from `sybdumptran`. `sybdumptran` dumps the transaction log, irrespective of whether partially logged operations have taken place or not, because the utility does not have access to the metadata information held within the database. If the sequencing is overridden when the transaction log is loaded, the load may fail, or worse, the database may become corrupted. If you make use of partially logged operations and you are unsure whether such an operation took place before the `sybdumptran` operation, make sure to run database consistency checks after the transaction log created by `sybdumptran`, has been loaded.

In this example, when you omit the `-m` metadata file option and specify the dump history file, `sybdumptran` locates the metadata file in the dump history file:

```
> sybdumptran -o /dumps/db.trn_sdt -h /dumps/dump_hist -d db
Opening output-file '/dumps/db.trn_sdt'.
Opening dump-history-file '/dumps/dump_hist'.
Option 'metadata-file' is not supplied, using last dump '/dumps/db.trn1' from
dump history file.
Opening metadata-file '/dumps/db.trn1'.
Opening log devices used by database:
  Opening device "db_log1", path "/sdcl_eng/devices/db.log1".
  Opening device "db_log2", path "/sdcl_eng/devices/db.log2".
Building run-lists using first log page=10894.
Finished building run-lists, number of log pages=1, first log page=10894, last
log page=10894.
Dumping log pages to output file "/dumps/db.trn_sdt".
Finished dumping 1 log pages.
Sybdumptran completed without errors.
```

2.41 sybmigrate

`sybmigrate` allows you to convert an SAP ASE server from one page size to another page size, and to migrate between platforms.

The utility is located in:

- (UNIX platforms) `$SYBASE/$SYBASE_ASE/bin/`
- (Windows) `%SYBASE%\%SYBASE_ASE%\bin\sybmigrate.bat`, as `sybmigrate.bat`.

⚠ Caution

`sybmigrate` assumes that the source and target SAP ASE servers will not have any activity during the migration. If objects are created, modified, or deleted during the migration process (setup, migrate, and validate), SAP cannot guarantee migration integrity.

Syntax

```
sybmigrate [-v ] [-h ] [-f ]
            [-D 1 | 2 | 3 | 4 ]
            [-I <interfaces_file> ]
            [-J <client_charset> ]
            [-l <log_file> ]
            [-m setup | migrate | validate | report ]
            [-r <input_resource_file >]
            [-rn status | space_est | repl | diff | password ]
            [-T <trace_flags> ]
            [-t <output_template_resource_file> ]
            [-Tase <trace_flags> ]
            [-z <language> ]
```

Parameters

-D 1 | 2 | 3 | 4

sets the debug level for `sybmigrate`. The default debug level is 2.

-f

overrides the locking session.

If `sybmigrate` exited a session inappropriately, use `-f` to override the source and target database binding that is created so that only one session of `sybmigrate` can run on a source and target database path.

-h

prints the help information and syntax usage and exits.

-I

identifies a specific `interfaces` file to find server names. If no `interfaces` file location is designated, `sybmigrate` uses:

- (UNIX) `$SYBASE/interfaces`
- (Windows) `%SYBASE%\ini\sql.ini`

i Note

You can override `sybmigrate`, and use the `interfaces` file by providing the `-I` argument if the LDAP entry is defined in:

- (UNIX) `$SYBASE/$SYBASE_OCS/config/libtcl.cfg`
- (Windows) `%SYBASE%\%SYBASE_OCS%\ini\libtcl.cfg`

-J

specifies the character set to be used for the SAP ASE connection.

-l

indicates a user-defined log file where the output of the migration process is stored. If `-l` is not used, the logs are stored in `$SYBASE/$SYBASE_ASE/init/logs` or the working directory.

-m

designates the types of operations that are performed:

- `setup` – to set up the repository and migration working database, and to migrate the server-wide data.
- `migrate` – to perform data and object migration.
- `validate` – to validate the migrated objects.
- `report` – to run any of the five reports. The reports can be run in the GUI and resource file mode. The available reports are:

- `status` – the migrate object status report gives information about objects that have been migrated. To run this report, issue:

```
sybmigrate -r <resource file> -m report -rn
status
```

- `space_est` – use the target database space estimation report to verify that you have sufficient resources allocated to your target database. In the resource file mode, issue the following command to run the `space_est` report:

```
sybmigrate -r <resource file> -m report -rn
space_est
```

- `repl` – use the replication report to check any explicitly replicated objects that have been migrated, determine the type of replication system, and to produce SQL commands for users to execute on the target SAP ASE server and the Replication Server. To run the `repl` report, issue:

```
sybmigrate -r <resource file> -m report -rn repl
```

- `diff` – checks the objects between the source and target databases. Users can run the report on individual objects, or the entire database, except for server and database information or metadata. You can run the `diff` report at

any time. You do not need to run a setup session to run the `diff` report. The source and target database name do not need to be the same when running the `diff` report.

The `diff` report provides the following information for the following object types:

- Server information – compares the master database system catalogs row count between the source and target SAP ASE server. This task is similar to the validation session.
 - Database information – compares the user database system catalogs row count between the source and target SAP ASE server. This task is similar to the validation session.
 - DDL objects – the report displays whether the objects exist on the source or the target SAP ASE servers. If the objects exists in both databases, that object does not appear in the report.
 - User table data – compares the row count of the user tables in the source and target SAP ASE server. If the table only exists in the source or target databases, the `table` does not appear in the report.
- `password` – creates a file for the changed passwords.

-r

specifies that the resource file mode is to be used in the migration process. If the input resource file is not specified by using the `-r` parameter, `sybmigrate` operates in GUI mode.

If you use the `-r` parameter, then you also need to use the `-m` argument to specify the type of operation to perform: `setup`, `migrate`, `validate`, or `report`. You can run the entire migration process in the resource file mode, or you can choose to run only parts of in this fashion.

-rn

indicates what type of report to generate. If `-rn` is not specified, all five reports are run.

-T

sets these command line trace flags:

- `DUMP_SQL` – specifies that every query issued by `sybmigrate` is output to the log file.
- `NO_SORTED_DATA` – overrides the default, which specifies that tables with clustered indexes are copied to the target server in order, and the clustered index is recreated using the `with_sorted_data` option.
- `LEAVE_PTBL_ON_ERROR` – specifies that proxy tables are not deleted on failure.
- `SKIP_CONFIG_CHECK` – specifies that configuration compatibility checks are not to be performed.
- `SKIP_PARTITION_CHECK` – specifies that partition compatibility checks are not to be performed.
- `DUMP_DDL` – specifies that DDL commands are to be output to the log file.
- `DUMP_DEPEND_OBJECT` – specifies that when the `auto_select_dependent_objects` option is used, `sybmigrate` outputs a list of objects added as dependents.

- `ONE_WORK_THREAD` – specifies that one work thread is to be used, overriding the current setting for schema creation threads.
- `ALLOW_DATA_AND_INDEX` – overrides default behavior, in which indexes are created after all tables are created. Indexes are created as resources become available.

-t

directs `sybmigrate` to generate an output template resource file, to be used for subsequent migrations in the resource file mode.

`-t` requires that you start `sybmigrate` using the `-r` argument specifying the login information. This argument also requires `-m` to specify what type of resource file is to be generated.

i Note

You can use `-t` only in the resource file mode.

-Tase

runs SAP ASE trace flags (turned on using `dbcc traceon`) for all SAP ASE connections opened by `sybmigrate`. Specify the trace flags in a comma-separated list.

-v

prints the version string and exits.

-z

specifies the language to be used for the SAP ASE connection.

Examples

Example 1

Runs the `status` report:

```
sybmigrate -r <resource file> -m report -rn status
```

Example 2

Runs the `space_est` report in the resource file mode:

```
sybmigrate -r <resource file> -m report -rn space_est
```

Example 3

Runs the `repl` report, issue:

```
sybmigrate -r <resource file> -m report -rn repl
```

Usage

- You can use the `sybmigrate` utility to migrate an encrypted database just as you would a normal database. When you do, make sure:
 - The master database in the target server has the same database encryption key as the one used for the database you are migrating
 - You configure the target database as an encrypted database that uses the same database encryption key as the database you are migrating.
- You can use `sybmigrate` to migrate precomputed result sets (PRS); the utility supports both `prs_create_list` and `prs_create_list_from_sql` resource files.
- For security purposes, set file permissions at the highest level (preferably 600) for both the `sybmigrate` resource file and the file that contains the login and password information you are using for migrating logins from the source to the target server.
- Make sure the `allow_resource_limits` configuration parameter is set to 0 before running `sybmigrate`.
- You cannot migrate server data if metadata already exists on the target SAP ASE server.
- If `sybmigrate` exited a session inappropriately, use `-f` to override the source and target database binding that is created so that only one session of `sybmigrate` can run on a source and target database path.
- If you use the `-r` parameter, then you also need to use the `-m` argument to specify the type of operation to perform: `setup`, `migrate`, `validate`, or `report`. Run the entire migration process in the resource file mode, or run only parts in this fashion.
- Use `-t` only in the resource file mode. `-t` requires that you start `sybmigrate` using the `-r` argument specifying the login information. This argument also requires `-m` to specify what type of resource file is to be generated.
- You may specify the size and location of a work database on your target server.
- SAP does not support SAP ASE version 12.5.1. SAP recommends that you upgrade from 12.5.1 to 12.5.4, then from 12.5.4 to 15.5 and later versions. To make the 12.5.1 server visible to the 12.5.4 or later server, use:

```
sp_addserver 'servername', local
```

Restart SAP ASE to recognize the 12.5.1 server.

- You can override `sybmigrate`, and use the `interfaces` file by providing the `-I` argument if the LDAP entry is defined in:
 - UNIX – `/$SYBASE/$SYBASE_OCS/config/libtcl.cfg`
 - Windows – `/%SYBASE%\%SYBASE_OCS%\ini\libtcl.cfg`
- `sybmigrate` automatically migrates predicated privileges when:
 - `ddlgen` is called to generate the scheme definitions, including grants, denies, and revokes
 - Data is migrated using CIS and proxy tables.

Permissions

You must log in with the `sa_role` to use `sybmigrate` with the `-m setup` option. For the remainder of the migration process, the login must have “`sa_role`” and “`sso_role`” privileges to run `sybmigrate`.

If you want any user other than the sa to use `sybmigrate`, set the `cis_rpc_handling` configuration parameter to "1".

Related Information

[Migrate Data Using sybmigrate \[page 350\]](#)

2.42 sybrestore

`sybrestore` allows you to restore an SAP ASE database to the time of failure from the most current full database backup dump files.

Syntax

Parameters for interactive mode:

```
sybrestore [-v ] [-h ]
  [-S <server_name> | <host_name>:<port_number>]
  [-t <[point in time of restore]>]
  [-d< dump_directory>]
  [-I <interfaces_file> ]
  [-J <character_set >]
  [-P <password> ]
  [-U <username>]
  [-z <language> ]
  [-R Restore from master database corruption ]
  [-s <list system databases except master database >]
  [-o Log output]
```

Parameters for noninteractive mode:

```
sybrestore [-v ] [-h ]
  -S< server_name> | <host_name>:<port_number>
  -U <username>
  [-P< password>]
  -D< database_name>
  [-d< dump_directory>]
  [-I< interfaces_file>]
  [-o Log output]
```

Parameters

-h

prints the help information and syntax usage and exits.

- D <database_name>**
specifies the source database name.
- d <dump_directory>**
specifies the dump directory for dumping the last log.
- I <interfaces_file>**
identifies a specific `interfaces` file in which to look for server names. If you do not specify this parameter, `sybrestore` uses:
- (UNIX) `$SYBASE/interfaces`
 - (Windows) `%SYBASE%\ini\sql.ini`
- J <character_set>**
specifies the character set to be used for the SAP ASE connection.
- P <password>**
specifies your SAP ASE password. If you do not specify the `-P` parameter, `sybrestore` prompts for a password.
- S <server_name> | <host_name>:<port_number>]**
specifies the name of the source SAP ASE server. `sybrestore` looks for this name in the `interfaces` file.
- `<host_name>:<port_number>` specifies the machine name and the port number.
- t <point_in_time>**
restores the specified database to a point in time.
- U <username>**
specifies a case-sensitive login name.
- v**
prints the version string and exits.
- z <language>**
specifies the language to be used for the SAP ASE connection.

Examples

command line mode

Invokes the command line interactive Restore Database menu. Use single-key entries to navigate through the menu options to specify options for restoring a database:

```
sybrestore -Usa -P -SlinuxData
```

```
sybrestore -Usa -P -SlinuxData
<<<<<<====User Database Restore Menu =====>>>>>>>>>>
c : Complete Database Restore
p : Database Point-In-Time Restore
```

To invoke the interactive command line Restore Database menu and execute the SQL statements for restoring the database to a point in time:

```
sybrestore -Usa -P -SaseServer1 -t
```

Noninteractive mode

Invokes `sybrestore` in noninteractive mode using SAP ASE 15.7 ESD #2 and later. Executes the SQL statements for restoring the database and exits:

```
sybrestore -Usa -P -SaseServer1 -Ddba_db
```

Usage

Verify settings before using `sybrestore`.

- SAP ASE server and Backup Server are running for both the target and source.
- The `master` database is available.
- The log segment of the source database is available for dumping and then loading back the most recent transaction logs that have not been dumped.
- Either history files or external dump files are available.

Permissions

To use `sybrestore`, you must be logged in with the `sa_role`, or as the database owner.

Related Information

[Restore Databases Using sybrestore \[page 384\]](#)

2.43 sybtssmpasswd

Records or changes the user password and creates the Tivoli Storage Manager (TSM) encrypted password file, `TSM.PWD`, on the TSM client machine. The location of the file is the directory specified by the `PASSWORDDIR` configuration parameter in the TSM configuration file.

i Note

`sybtssmpasswd` is supported when the IBM Tivoli Storage Manager is licensed at your site.

Syntax

```
sybtsmpasswd
```

Examples

Example 1

`sybtsmpasswd` prompts for password information.

```
sybtsmpasswd  
Enter your current password:  
Enter your new password:  
Enter your new password again:  
Your new password has been accepted and updated.
```

Usage

Execute `sybtsmpasswd` when you record or change the user password. Make sure the same user name and password are present in the `TSM.PWD` file on the TSM client node.

Permissions

Only the operating system “root” user can execute `sybtsmpasswd`.

2.44 updatease

The `updatease` utility reinstalls scripts and updates system stored procedures and messages after a minor upgrade.

The `updatease` executable file is located in:

- (UNIX) `$SYBASE/SYBASE_ASE/bin/`
- (Windows) `%SYBASE%\%SYBASE_ASE%\bin\`

Syntax

```
updatease
  -S<server_name>
  -P<ASE_password>
  [-t]
  [-k]
  [-v]
  [-D <data_directory>]
```

The syntax for SAP ASE Cluster Edition:

```
updatease -F<SCC_connection>
  -P<SCC_password>
  [-D <data_directory>]
  -C<cluster_name>
  -i<instance>
  -A<ASE_instance_password>
```

Parameters

-S<server_name>

(nonclustered SAP ASE only) specifies the SAP ASE server you are updating.

-P<ASE_password>

(nonclustered SAP ASE only) is the SAP ASE "sa" password. If you do not specify this, updatease obtains the information from the SYBASE_ASE_SA_PWD environment variable or at the prompt.

-D<data_directory>

(optional) specifies the working directory when it differs from the default installation directory for the SAP ASE server. Use this option when you specify at the time that you install SAP ASE, that another user could configure the server. If you do not use `-D`, the SAP ASE server uses `$SYBASE` as the default.

-t

tests for upgrade eligibility and returns the status.

-k

skips the database free-space check and performs the upgrade procedure directly.

-v

prints the version number and copyright message.

-F<SCC_connection>

(SAP ASE Cluster Edition only) specifies the SAP Control Center agent that you use to access the cluster. The value must be in the form "`<hostname:port_number>`".

-P<SCC_password>

(SAP ASE Cluster Edition only) specifies the SCC "uafadmin" password. If you do not specify this, updatease obtains the information from the UAFADMIN_PWD environment variable.

-C<cluster_name>

(SAP ASE Cluster Edition only) specifies the name of the SAP ASE cluster.

-i<instance>

(SAP ASE Cluster Edition only) specifies the SAP ASE instance you are updating.

-A<ASE_instance_password>

(SAP ASE Cluster Edition only) specifies the SAP ASE "sa" password.

Usage

When you perform a minor upgrade/update from SAP ASE version 15.0 and higher, you need to update the system stored procedures and messages from the earlier version of SAP ASE, as well as reinstall the scripts in the following directory:

- (UNIX) \$SYBASE/ASE-15_0/scripts/
- (Windows) %SYBASE%\ASE-15_0\scripts\

i Note

In a nonclustered SAP ASE, when you perform the minor upgrade using the SAP ASE installer, the installer runs `updatease` in the background; you need not perform any additional steps.

Permissions

You must be an SAP ASE system administrator, or log in with the `sa_role` to use `updatease`.

Related Information

[Installation or Configuration Utilities \[page 9\]](#)

2.45 xpserver

Starts XP Server manually.

Syntax

```
xpserver -S <XP_Server>
```

```
xpserver
-S<XP_Server>
  [-I<interfaces_file>]
  [-p<priority>]
  [-s<stack_size>]
  [-u]
  [-v]
  [-x]
```

Parameters

-S <XP_Server>

specifies the name of the XP Server to start. The format of the XP server name is `<SQLSERVERNAME_XP>`, where `<SQLSERVERNAME>` is the name of the SAP ASE server to which the XP Server is dedicated. For example, the XP Server for an SAP ASE server named SMOKE would be named SMOKE_XP. The XP Server name must be in uppercase.

-I <interfaces_file>

specifies the name and location of the directory containing the interfaces file (`sql.ini`) that the SAP ASE server searches when connecting to XP Server. If you do not specify `-I`, `xpserver` uses the `ini` subdirectory of the `%SYBASE%` release directory.

-p <priority>

specifies the priority of the Open Server process. Values between 0 (lowest) and 15 (highest) are valid. Overrides the `esp execution priority` configuration parameter. The default is 8.

-s <stack_size>

specifies (in bytes) the stack size of the process used to execute an extended stored procedure (ESP). Overrides the `esp execution stacksize` configuration parameter if it is set. The default is 34816 bytes.

-u

specifies that the functions be automatically unloaded from XP Server memory after the ESP request terminates. Overrides the `esp unload dll` configuration parameter if it is set. The default is not to unload the function.

-v

prints the version number and copyright message for XP Server and then exits.

-x

specifies that the client security context be used to execute operating system commands using the system ESP, `xp_cmdshell`. Overrides the `xp_cmdshell context` configuration parameter if it is set. The default is to use the security context of the operating system account of the SAP ASE session.

Usage

- When you run `xpserver` in root, `xpserver` automatically enables secure access on the machine as if you set the `xp_cmdshell context` configuration parameter to 1, thereby preventing users from accessing the SAP ASE server unless they are also valid users on the machine.
- XP Server is normally started automatically by the SAP ASE server. Use the manual command to start XP Server **only** when instructed to do so in an “XP Server Failed to Start” error message.
- There can be only one XP Server per SAP ASE server. An SAP ASE server running ESPs communicates with a single XP Server, and the ESPs execute synchronously.
- The `-p` parameter affects the priority used by the Open Server scheduler. If `-p` is set to a high number, the scheduler can run XP Server before running the other threads in its run queue. If `-p` is set to a low number, the scheduler can run XP Server only when there are no other Open Server threads in its run queue. This parameter is unrelated to the application queue priorities within SAP ASE, which are set by `sp_bindexeclclass`.
See the discussion of multithread programming in the *Open Server Server Library/C Reference Manual*.
- If automatic unloading of ESP functions is not set by the `-u` parameter or by the `esp unload dll` configuration parameter, unload them at runtime using `sp_freedll`.
- Unlike an SAP ASE server and Backup Server, XP Server does not have a runserver file.
- When configuring an XP Server, the directory service entry name must end with “_XP” in upper case, such as “abcdef_XP” or “ABCDEF_XP.”

See also:

- *Reference Manual: Procedures* – `sp_configure`, `sp_freedll`, `xp_cmdshell` extended stored procedure

Permissions

No special permissions are required to run `xpserver`.

3 Transfer Data to and from SAP ASE Using bcp

This chapter discusses the `bcp` bulk copy utility, which provides a convenient, high-speed method for transferring data between a database table or view and an operating system file.

`bcp` can read or write files in a wide variety of formats. When copying in from a file, `bcp` inserts data into an existing database table; when copying out to a file, `bcp` overwrites any previous contents of the file.

Versions earlier than SAP ASE 15.0.3 did not allow you to run fast `bcp` on tables with nonclustered indexes or triggers. Cluster Edition version 15.0.3 and later removes this restriction.

Related Information

[bcp \[page 30\]](#)

3.1 Methods for Moving Data

There are two methods to move data to and from your SAP ASE databases.

- `bcp` as a standalone program from the operating system.
- Client-Library, which calls bulk-library routines. See the *Open Client and Open Server Common Libraries Reference Manual*.

3.1.1 Import and Export Data with bcp

Transact-SQL commands cannot transfer data in bulk. For this reason, use `bcp` for any large transfers.

Uses for `bcp` include:

- Importing data that was previously associated with another program, such as the records from another database management system. This is the most common use for `bcp`.
Before using `bcp`, create a file of the records you want to import. The general steps are:
 1. Put the data to transfer into an operating system file.
 2. Run `bcp` from the operating system command line.
- Moving tables between SAP ASE servers or between an SAP ASE server and other data sources that can produce an operating-system file.
- Copying out data from a view.

i Note

You cannot use `bcp` to copy **in** data to a view.

- Transferring data for use with other programs, for example, with a spreadsheet program. The general steps to transfer data are:
 1. Use `bcp` to move the data from the SAP ASE server into an operating-system file from which the other program imports the data.
 2. When you finish using your data with the other program, copy it into an operating-system file, then use `bcp` to copy it into the SAP ASE server.

The SAP ASE server can accept data in any character or binary format, as long as the data file describes either the length of the fields or the terminators, the characters that separate columns.

The structures in the tables involved in the transfer need not be identical, because when `bcp`:

- Imports **from** a file, it appends data to an existing database table.
- Exports **to** a file, it overwrites the previous contents of the file.

When the transfer is complete, `bcp` informs you of the:

- Number of rows of data successfully copied
- Number of rows (if any) that it could not copy
- Total time the copy took
- Average amount of time, in milliseconds, that it took to copy one row
- Number of rows copied per second.

If `bcp` runs successfully, you see a return status of 0. The return status generally reflects errors from the operating system level and correspond to the ones listed in the `errno.h` file in the `/usr/include/sys/` directory.

Related Information

[bcp \[page 30\]](#)

3.2 bcp Modes

`bcp in` works in one of three modes.

- Slow `bcp` – logs each row insert that it makes, used for tables that have one or more indexes.
- Fast `bcp` – logs only page allocations, copying data into tables without indexes or at the fastest speed possible. Use fast `bcp` on tables with nonclustered indexes.
- Fully logged fast `bcp` – provides a full log for each row. Allows you to use fast `bcp` on indexed and replicated tables.

Although fast `bcp` might enhance performance, slow `bcp` gives you greater data recoverability. Fully-logged fast `bcp` provides a combination of both.

To determine the `bcp` mode that is best for your copying task, consider:

- Size of the table into which you are copying data
- Amount of data that you are copying in
- Number of indexes on the table
- Whether the table is replicated
- Amount of spare database device space that you have for re-creating indexes

The modes `bcp` uses depending on index type:

Table Properties	bcp Mode for bulkcopy on, With Logging	bcp Mode for bulkcopy on Without Logging
Clustered index	Slow mode	Slow mode
Replicated table with indexes or triggers, but no clustered index	Fast mode	Slow mode
Nonclustered index and no triggers	Fast mode	Slow mode
Triggers, and no indexes	Fast mode	Fast mode
Nonclustered index with triggers	Fast mode	Fast mode
No indexes, no triggers, and no replication	Fast mode	Fast mode

3.3 bcp Requirements

Before using `bcp`, provide it with basic data information and prepare both the data for transfer and the command to access the data.

To transfer data successfully to and from the SAP ASE server, supply:

- Name of the database and table or view
- Name of the operating system file
- Direction of the transfer (`in` or `out`)

You may also use `bcp` to modify the storage type, storage length, and terminator for each column.

3.3.1 bcp Permissions

You need an SAP ASE account and the appropriate permissions on the database tables or views, as well as the operating system files to use in the transfer to use `bcp`.

To copy:

- Data into a table – have `insert` and `select` permission on the table.
- A table to an operating system file – have `select` permission on:
 - The table to copy
 - `sysobjects`
 - `syscolumns`
 - `sysindexes`

3.3.2 Before You Transfer

Prepare the command and the data for transfer before using `bcp in`.

To use either fast or fast-logged `bcp`, set `select into/bulkcopy/pllsort` to `true`. For example, to turn on this option for the `pubs2` database, enter:

```
sp_dboption pubs2, "select into/bulkcopy/pllsort", true
```

To use fast `bcp`, remove indexes on the target table.

In addition:

- If you are running Open Client version 11.1 or later and are using an external Sybase configuration file, enable `bcp` by adding:

```
[BCP]
```

- Set the `$SYBASE` environment variable to the location of the current version of SAP ASE before using `bcp`.
- To use a previous version of `bcp`, set the `CS_BEHAVIOR` property in the `[bcp]` section of the `ocs.cfg` file:

```
[bcp]
CS_BEHAVIOR = CS_BEHAVIOR_100
```

If you do not set `CS_BEHAVIOR` to `CS_BEHAVIOR_100`, use functionality for `bcp` 11.1 and later.

Related Information

[bcp Modes \[page 205\]](#)

[Fast, Fast-logged, and Slow bcp \[page 209\]](#)

3.4 bcp and Encryption

Client and server connections automatically encrypt some `bcp` parameters that transfer sensitive data.

The following parameters are automatically encrypted so long as the client and server are running on SAP ASE version 16.0 SPO3 or later:

- `--initstring "<TSQL_command>"`
- `--colpasswd [[<db_name>.<owner>].<table_name>.<column_name> [<password>]]`
- `--keypasswd [[<db_name>.<owner>].<key_name> [<password>]]`

i Note

There is no command line option to turn encryption on or off for these commands.

See the *Security Administration Guide > Confidentiality of Data > Encryption*.

3.5 Copy Data to Partitions Using bcp

Use `bcp` to copy data from a table to an operating system file. Specify a table name and one or more partitions as the source.

You can copy data to a single file for all partitions, or a single file for each partition.

If you do not specify a destination file name, the SAP ASE server creates file names based on the partition names.

These examples show how to copy of data from `bigtable`, which is partitioned three ways—`ptn1`, `ptn2`, and `ptn3`—to various operating system files:

- Copies the data in `bigtable` to `file1`:

```
bcp mydb..bigtable out file1
```

- Copies the data from `ptn1`, `ptn2`, and `ptn3` to `file2`:

```
bcp mydb..bigtable partition ptn1, ptn2, ptn3 out file2
```

- Copies the data from `ptn1` and `ptn2` to data files `ptn1.dat` and `ptn2.dat`:

```
bcp mydb..bigtable partition ptn1, ptn2 out ptn1.dat,  
ptn2.dat
```

- Copies the data from `ptn1` and `ptn2` to `ptn1.dat` and `ptn2.dat`:

```
bcp mydb..bigtable partition ptn1, ptn2 out
```


Related Information

[bcp \[page 30\]](#)

3.6 Improve bcp Performance

There are three ways to improve the performance of `bcp`.

Use:

- Fast-logged `bcp`
- Partitioned tables – several `bcp` sessions with a partitioned table can dramatically reduce the time required to copy the data. However, such performance improvements are more noticeable in fast and fast-logged `bcp` than in slow `bcp`.
- `bcp` in parallel to increase performance dramatically – parallel bulk copy can provide balanced data distribution across partitions.

i Note

`bcp` does not fire any trigger that exists on the target table.

Related Information

[Using Parallel Bulk Copy to Copy Data into a Specific Partition \[page 216\]](#)

3.6.1 Fast, Fast-logged, and Slow bcp

Whether to use fast, fast-logged, or slow `bcp` depends on your situation.

The existence of indexes on tables can affect transfer speed, depending on certain attributes. Unless you explicitly specify fast-logged `bcp` on tables with indexes, `bcp` automatically uses slow mode, which logs data inserts in the transaction log. These logged inserts can cause the transaction log to become very large.

To control this data excess and ensure that the database is fully recoverable in the event of a failure, back up the log with `dump transaction`.

By default, the `select into/bulkcopy/pllsort` option is `false` (disabled) in newly created databases. When this option is disabled, `bcp` automatically uses slow mode. Fast and fast-logged `bcp` both require that `select into/bulkcopy/pllsort` option is set to `true`. To change the default setting for future databases, turn this option on in the `model` database.

i Note

You need not set the `select into/bulkcopy/pllsort` option to `true` to copy out data from, or to copy in data to a table that has indexes. Slow `bcp` always copies tables with indexes and logs all inserts.

The differences between fast, fast-logged, and slow `bcp` are:

- Fast `bcp`:

Lock Scheme	Index Type	<code>select into</code>	Recovery
APL	Non-unique nonclustered	On	No
DOL	Non-unique nonclustered	On	No
DOL	Non-unique clustered	On	No

- Fast-logged `bcp` (in SAP ASE 15.7 ESD #2):

Lock Scheme	Index Type	<code>select into</code>	Recovery
APL	Non-unique nonclustered	On	Yes
DOL	Non-unique nonclustered	On	Yes
DOL	Non-unique clustered	On	Yes

- Slow `bcp`:

Lock Scheme	Index Type	<code>select into/ bulkcopy</code>	Recovery
APL	Unique	On/off	Yes
DOL	Unique	On/off	Yes
APL	Non-unique	Off	Yes
DOL	Non-unique	Off	Yes

While the `select into/bulkcopy/pllsort` option is on, you cannot dump the transaction log. Issuing `dump transaction` produces an error message instructing you to use `dump database` instead.

⚠ Caution

Be certain that you dump your database before you turn off the `select into/bulkcopy/pllsort` flag. If you have inserted unlogged data into your database, and you then perform a `dump transaction` before performing a `dump database`, you will not be able to recover your data.

SAP ASE prohibits `dump transaction` after running fast `bcp`. Instead, use `dump database`. Because slow `bcp` is a minimally logged operation, the SAP ASE server allows you to issue `dump transaction` after running slow `bcp` whether `select into/bulkcopy/pllsort` is set to `true` or `false` in the database.

3.6.1.1 Slow bcp

In certain situations, use slow `bcp`.

Use slow `bcp` when:

- `sp_dboption 'select into/bulkcopy/pllsort'` is off.
- `sp_dboption 'select into/bulkcopy/pllsort'` is on, but the table uses the allpages locking scheme and has a clustered index.
- `sp_dboption 'select into/bulkcopy/pllsort'` is on, but the table has a unique nonclustered index.

If the option `ignore_dup_key` option is enabled on the unique index, performing fast `bcp` can put the table and index in an inconsistent state if rows with duplicate keys are inserted. To avoid the inconsistency, the SAP ASE server performs slow `bcp`.

- If the table has nonclustered indexes or triggers, and the table is marked for replication or the database is used as a warm standby.
Because fast `bcp` does not log inserts, if the SAP ASE server uses fast `bcp`, the rows `bcp` copies cannot be recovered on the replication site if there is a problem. The SAP ASE server uses slow `bcp` in these situations to maintain compatibility with applications that were written to use the old behavior.

3.6.1.2 Fast bcp

Adaptive Server uses fast `bcp` in certain situations.

The SAP ASE server uses fast `bcp` when (in all cases `sp_dboption 'select into/bulkcopy/pllsort'` is enabled and the table does not have a unique clustered index):

- You do not explicitly specify fast-logged `bcp`.
- The table has a non-unique, nonclustered index. The SAP ASE server logs the index updates and the page allocations only. It does not log inserts into the table.
- A table has triggers. However, `bcp` does not fire any triggers in the target table.
- A table has datarows or datapage locking scheme with a unique clustered index.

If the table includes nonclustered indexes or triggers, but `sp_dboption 'select into/bulkcopy/pllsort'` is not enabled, the SAP ASE server uses slow `bcp`.

Fast `bcp` runs more slowly while a `dump database` is taking place.

Fast `bcp` logs only the page allocations. For copying data in, `bcp` is fastest if your database table has no indexes.

If you use fast `bcp` to make data inserts, which fast `bcp` does not log, you cannot back up (`dump`) the transaction log to a device. The changes are not in the log, and a restore cannot recover nonexistent backup data. The requested backup (`dump transaction`) produces an error message that instructs you to use `dump database` instead. This restriction remains in force until a `dump database` successfully completes. For more information about `dump database` and `dump transaction`, see the *System Administration Guide*, and the *Reference Manual*.

`bcp` optimization is performed by the SAP ASE server and does not require that you use Open Client version 15.0 or later.

3.6.1.3 Fast-logged bcp

Use fast-logged `bcp` on any table that includes indexes and triggers (`bcp` does not fire any triggers in the target table). Fast-logged `bcp` logs inserts to tables.

Use the `set logbulkcopy {on | off }` command to configure fast-logged `bcp` for the session. You may include the `set logbulkcopy {on | off }` with the `--initstring '<Transact-SQL_command>'` parameter, which sends Transact-SQL commands to the SAP ASE server before transferring the data. For example, this enables logging when you transfer the `titles.txt` data into the `pubs2..titles` table:

```
bcp pubs2..titles in titles.txt --initstring 'set logbulkcopy on'
```

3.6.1.4 Copying Tables with Indexes

The `bcp` utility is optimized to load data into tables that do not have indexes associated with them.

`bcp` loads data into tables without indexes at the fastest possible speed. Fast-logged `bcp` logs any data changes to the table.

When you copy data into a table that has one or more indexes, depending on the index type and the locking scheme, you can use fast `bcp`. This includes indexes that are implicitly created using the unique integrity constraint of a `create table` statement. However, `bcp` does not enforce the other integrity constraints defined for a table.

i Note

The log can grow very large during slow `bcp` because `bcp` logs inserts into a table that has indexes. After the bulk copy completes, back up your database with `dump database`, then truncate the log with `dump transaction` after the bulk copy completes and after you have backed up your database with `dump database`.

The performance penalty for copying data into a table that has indexes in place can be severe. If you are copying in a very large number of rows, it may be faster to drop all the indexes beforehand with `drop index` (or `alter table`, for indexes created as a unique constraint); set the database option; copy the data into the table; re-create the indexes; and then dump the database. Remember to allocate disk space for the construction of indexes: about 2.2 times the amount of space needed for the data.

3.6.1.4.1 Locking Scheme and Fast bcp

Regardless of the locking scheme, any table without indexes can utilize fast `bcp`.

For:

- APL tables – the index must be nonunique and nonclustered to enable fast `bcp`.

- DOL tables – the index need only be nonunique for fast `bcp`. It can be either clustered or nonclustered.

To access fast `bcp`, set `sp_dboption 'select into/bulkcopy/pllsort to true` in the database.

SAP recommends that you enable `dboption "trunc log on chkpt"` before using `bcp`. This ensures that the log will be truncated with each checkpoint. The SAP ASE server issues a checkpoint with each batch completion. To implement more checkpoints, run `bcp -b <batchsize>`.

3.6.1.5 Space Requirements for Copying

If you are copying a very large number of rows, you must have 1.2 times the amount of space needed for the data and enough space for the server to reconstruct a clustered index.

If space is

- Available – use `drop index` to drop all the indexes beforehand.
- Not available – if you do not have enough space for the server to sort the data and build the index or indexes, use slow `bcp`.

3.6.2 Summary of Steps for Fast and Fast-logged bcp

The various steps available for fast and fast-logged `bcp` can be performed by various users.

Table 3: Steps for Copying in Data Using Fast and Fast-logged `bcp`

Step	Who can do it
Use <code>sp_dboption</code> to set <code>select into/bulkcopy/pllsort to true</code> .	System administrator or database owner
Have enough space to re-create any indexes on the table.	Table owner
Drop the indexes on the table.	
Have <code>insert</code> permission on the table.	Granted by the table owner
Perform the copy with <code>bcp</code> .	Any user with <code>insert</code> permission
Re-create the indexes.	Table owner
Reset <code>sp_dboption</code> , if required.	System administrator or database owner
Use <code>dump database</code> to back up the newly inserted data.	System administrator, operator, or database owner
Run stored procedures or queries to determine whether any of the newly loaded data violates rules.	Table owner or stored procedure owner

3.6.3 Bulk Copying Data into Partitioned Tables

In certain circumstances, you can improve `bcp` performance dramatically by executing several `bcp` sessions with a partitioned table.

Partitioned tables improve insert performance by reducing lock contention and by distributing I/O over multiple devices. `bcp` performance with partitioned tables is improved primarily because of this distributed I/O.

When you execute a `bcp` session on a partitioned table, consider:

- A partitioned table improves performance when you are bulk copying **in** to the table.
- The performance of slow `bcp` does not improve as much with partitioned tables. Instead, drop all indexes and use fast or fast-logged `bcp`.
- Network traffic can quickly become a bottleneck when multiple `bcp` sessions are being executed. If possible, use a local connection to the SAP ASE server to avoid this bottleneck.

When copying data into a partitioned table, you can:

- Copy the data randomly without regard to the partition to which data is copied. For example, to copy data from `file1` to `bigtable`, enter:

```
bcp mydb..bigtable in file1
```

To copy data from `file1`, `file2`, and `file3` to `bigtable`, enter:

```
bcp mydb..bigtable in file1, file2, file3
```

- Copy the data into a specific partition For example, to copy data from `file1` to `ptn1`, `file2` to `ptn2`, and `file3` to `ptn3`, enter:

```
bcp mydb..bigtable partition ptn1, ptn2, ptn3 in file1, file2, file3
```

To copy data from `file1` to the first partition of `bigtable`, enter:

```
bcp mydb..bigtable:1 in file1
```

If the table has a clustered index, `bcp` runs in slow mode and allows the index to control the placement of rows.

3.6.3.1 Copying Data Randomly Into Partitions

You can copy data randomly into partitioned tables when using multiple `bcp` sessions.

Procedure

1. Configure the table with as many partitions and physical devices as you require for your system.

For more information, see the *Performance and Tuning Guide*.

2. Make sure that the SAP ASE server is configured with enough locks to support multiple `bcp` sessions. For information on configuring locks, see the *System Administration Guide*.
3. Remove the indexes on the table and enable fast or fast-logged `bcp`.

i Note

If you use slow `bcp`, performance may improve significantly after you remove the indexes.

4. Divide the `bcp` input file into as many files of equal size as the number of planned simultaneous `bcp` sessions.

You also can use the `-F <first_row>` and `-L <last_row>` options to specify the start and end of each "input file."

5. Execute the `bcp` sessions with separate files in parallel on the local SAP ASE machine.

For example, on UNIX platforms, execute different sessions in different shell windows or start individual `bcp` sessions in the background.

Related Information

[Using Parallel Bulk Copy to Copy Data into a Specific Partition \[page 216\]](#)

[Fast, Fast-logged, and Slow `bcp` \[page 209\]](#)

3.6.3.2 Monitoring `bcp` Sessions with `dbcc checktable` and `sp_helpsegment`

If you do not specify which partition the `bcp` sessions should use, the SAP ASE server randomly assigns the multiple `bcp` sessions to the table's available partitions.

If this random assignment occurs, be sure to monitor the partitions to ensure that the process has evenly distributed the inserts by using either of the following:

- `dbcc checktable` – to periodically check the total page counts for each partition
- `sp_helpsegment` or `sp_helppartition` – to perform a similar check, but without locking the database objects

For more information about `dbcc checktable`, see the *System Administration Guide*. For more information about `sp_helpsegment` and `sp_helppartition`, see the *Reference Manual*.

For more information about table partitions, see the *Performance and Tuning Guide*.

3.6.3.3 Reducing Logging by Increasing Page Allocations

If you are using fast or fast-logged `bcpl`, consider that each `bcpl` in batch requires the page manager to allocate one or more extents. Each such allocation generates a single log record.

Use the `number of pre-allocated extents` configuration parameter to specify how many extents the SAP ASE server is to allocate through the page manager:

- Valid values for the `number of pre-allocated extents` configuration parameter are from 1 to 32; the default value is 2.
- The `number of pre-allocated extents` parameter is dynamic, not static. For this reason, you need not restart the SAP ASE server after you change its value.
- An object may be allocated more pages than actually needed, so the value of number of pre-allocated extents should be low if you are using `bcpl` for small batches. If you are using `bcpl` for large batches, increase the value of number of pre-allocated extents to reduce the amount of overhead required to allocate pages and to reduce the number of log records.

The SAP ASE server may allocate more pages than are actually needed, so keep the value small when space is limited. These pages are deallocated at the end of the batch.

In SAP ASE version 15.5 and later, the maximum values of preallocated extents has been increased from 31 to 32.

Using a value of 32 for the `number of pre-allocated extents` parameter has a special significance for configuration, and impacts the space allocations the SAP ASE server performs internally. If you set the number of preallocated extents to 32, the SAP ASE server attempts to reserve an entire allocation unit of extents for utility operations that use a large-scale allocation scheme of space reservation, such as `bcpl` in and `select into`.

Using the maximum number of preallocated extents can greatly improve the performance of these utilities, particularly when you run them in parallel. Using a value of 32 greatly increases the likelihood that each engine running the utility can work independently on its own allocation unit without interference from other engines.

See *Reference Manual: Configuration Parameters*.

3.6.4 Using Parallel Bulk Copy to Copy Data into a Specific Partition

Use parallel bulk copy to copy data in parallel to a specific partition. Parallel bulk copy substantially increases performance during `bcpl` sessions because it can split large bulk copy jobs into multiple sessions and run the sessions concurrently.

To use parallel bulk copy:


- The destination table must be partitioned. Use:
 - `sp_helppartition` – to see the number of partitions on the table.
 - `alter table ... partition` – to partition the table, if the table is not already partitioned.
- The destination table should not contain indexes because:

- If the table has a clustered index, this index determines the physical placement of the data, causing the partition specification in the `bcp` command to be ignored.
- If any indexes exist, `bcp` automatically uses its slow bulk copy instead of its fast bulk copy mode.
- If nonclustered indexes exist on the tables, parallel bulk copy is likely to lead to deadlocks on index pages.
- Each partition should reside on a separate physical disk for the best performance.
- Before you copy data into your database, partition the table destined to contain the data.
- Parallel bulk copy can copy in to a table from multiple operating system files.
 - For all types of partitioned tables, use:

```
bcp <tablename> partition <partition_name> in <file_name>
```

- For round-robin partitioned tables only, use:

```
bcp <tablename> <partition_number> in <file_name>
```

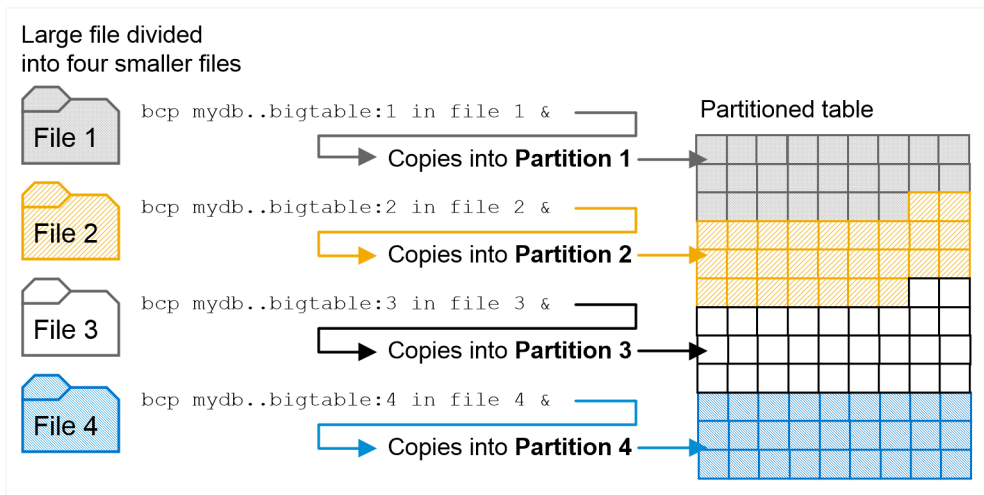

See the *Transact-SQL Users Guide* for information about partitioning a table.

Note

When using parallel bulk copy to copy data out, you cannot specify a partition number. You can, however, specify a partition name.

3.6.4.1 bcp in and Locks

When you copy in to a table using `bcp`—particularly when you copy in to a table using parallel `bcp`—the copy process acquires an exclusive lock.

- An exclusive intent lock on the table
- An exclusive page lock on each data page or data row
- An exclusive lock on index pages, if any indexes exist

If you are copying in very large tables—especially if you are using simultaneous copies into a partitioned table—this can involve a very large number of locks.

To avoid running out of locks, increase the number of locks.

- To estimate the number of locks needed, use:

```
<# of simultaneous batches> * (<rows_per_batch >/ (2016/<row_length>))
```

- To see the row length for a table, use:

```
1> select maxlen
2> from sysindexes
3> where id = object_id("<tablename>") and (indid = 0 or indid = 1)
```

See the *System Administration Guide* for more information about setting the number of locks.

- Use the `-b <batchsize>` flag to copy smaller batches; the default batch size is 1000 rows. The smallest batch size `bcp` can process is 1; the largest is 2147483647L.
- Run fewer batches concurrently.

3.6.4.2 Parallel Bulk Copy Methods

There are various methods to copy in data using parallel bulk copy.

- Start multiple `bcp` sessions in the background, and:
 - Specify the password at the command line.
 - Use native mode, character mode, or a format file.
 You can start `bcp` as many times as the table is partitioned.
- Create and use a format file:
 1. Start `bcp` in interactive mode.
 2. Answer the prompts.
 3. Create a format file that stores your responses.
 4. Put the process in the background when the copy begins.
 5. Issue the next `bcp` command, and specify the format file created with the first `bcp` command.
- Start `bcp` sessions in multiple windows.
- Specify a partition to file mapping in a single `bcp in` command.

The client can execute independent `bcp in` sessions in parallel. The user can alternately specify the `--maxconn` option to control the maximum number of parallel connections that the `bcp` client can open to the server.

Alternatively, specify the `--maxconn` option to control the maximum number of parallel connections that the `bcp` client can open to the server. To ensure parallel execution on UNIX platforms, use the `bcp_r` variant.

3.6.4.3 Parallel Bulk Copy Syntax

Use this syntax for parallel bulk copy, when using several simultaneous sessions.

≡ Syntax

```
bcp <table_name>[:<partition_number> | <partrition_name>] in <file_name>
-P<mypassword>
```

<table_name>

is the name of the table into which you are copying the data.

<partition_name>

is the name of the partition into which you are copying.

<file_name>

is the host file that contains the data.

<mypassword>

is your password.

Alternatively, you can execute parallel bulk copy using a multithreaded version of `bcp`:

- (UNIX) Perform this using the `bcp_r` command:

```
bcp_r <database_name>..<table_name> partition <partition_number1>
[, <partition_number2> ...] in <file_name1> [,<file_name2> ....]
-U[<username>] -P[<password>] -S[<servername>]
```

- (Windows) The standard `bcp` command is capable of parallel execution:

```
bcp <database_name>..<table_name> partition <partition_number1>
[, <partition_number2> ...] in <file_name1> [,<file_name2> ....]
-U[<username>] -P[<password>] -S[<servername>]
```

3.6.4.4 Using Parallel Bulk Copy on Round-robin Partitioned Tables

Copy sorted data in parallel into a specific partition.

- Specify the partition by appending a colon (:) plus the partition number to the table name. For example:

```
publishers:10
```

i Note

The partition you specify must exist before you issue the `bcp` command.

- Split the sorted data into separate files, or delineate the “files” by specifying the first row (`-F <first_row>`) and the last row (`-L <last_row>`) of the host file.
- Note the number of partitions in the table, as this number limits the number of parallel bulk copy sessions that you can start.

For example, if a table has four partitions, and you start five parallel bulk copy jobs, only the first four jobs can run in parallel; the fifth job does not start until one of the first four jobs finish.

`bcp` copies each file or set of line numbers to a separate partition. For example, to use parallel bulk copy to copy in sorted data to `mydb..bigtable` from four files into four partitions, enter:

```
bcp mydb..bigtable:1 in file1 -Pmypassword -c &
bcp mydb..bigtable:2 in file2 -Pmypassword -c &
bcp mydb..bigtable:3 in file3 -Pmypassword -c &
bcp mydb..bigtable:4 in file4 -Pmypassword -c &
```

3.6.4.5 Parallel Bulk Copy and IDENTITY Columns

When you use parallel bulk copy, IDENTITY columns can cause a bottleneck.

As `bcp` reads in the data, the utility both generates the values of the IDENTITY column and updates the IDENTITY column's maximum value for each row. This extra work may adversely affect the performance improvement that you expected to receive from using parallel bulk copy. To avoid this bottleneck, explicitly specify the IDENTITY starting point for each session.

Specifying the Starting Point from the Command Line

Use `-g <id_start_value>` to specify an IDENTITY starting point for a session in the command line.

The `-g` parameter instructs the SAP ASE server to generate a sequence of IDENTITY column values for the `bcp` session without checking and updating the maximum value of the table's IDENTITY column for each row. Instead of checking, the SAP ASE server updates the maximum value at the end of each batch.

Caution

When specifying overlapping identity value ranges, be cautious about inadvertently creating duplicate identity values.

To specify a starting IDENTITY value, enter:

```
bcp [-g<id_start_value>]
```

For example, to copy in four files, each of which has 100 rows, enter:

```
bcp mydb..bigtable in file1 -g100
bcp mydb..bigtable in file2 -g200
bcp mydb..bigtable in file3 -g300
bcp mydb..bigtable in file4 -g400
```

Using the `-g` parameter does not guarantee that the IDENTITY column values are unique. To ensure uniqueness:

- Know how many rows are in the input files and what the highest existing value is. Use this information to set the starting values with the `-g` parameter and generate ranges that do not overlap. In the example above, if any file contains more than 100 rows, the identity values overlap into the next 100 rows of data, creating duplicate identity values.
- Verify that no one else is inserting data that can produce conflicting IDENTITY values.

3.6.4.5.1 Retaining Sort Order

If you copy sorted data into the table without explicitly specifying the IDENTITY starting point, `bcp` might not generate the IDENTITY column values in sorted order.

Parallel bulk copy reads the information into all the partitions simultaneously and updates the values of the IDENTITY column as it reads in the data.

A `bcp` statement with no explicit starting point would produce IDENTITY column numbers similar to those shown as follows:

ID column			ID column			ID column			ID column		
100	A		102	C		103	F		101	H	
104	A		106	C		105	F		110	H	
107	B		109	C		111	F		113	I	
108	B		112	D		116	G		115	J	
114	B		117	E		119	G		118	J	
Partition 1			Partition 2			Partition 3			Partition 3		

The table has a maximum IDENTITY column number of 119, but the order is no longer meaningful.

To enforce unique IDENTITY column values in the SAP ASE server, run `bcp` with either the `-g` or `-E` parameter.

3.6.4.5.2 Specifying the Value of a Table's IDENTITY Column

By default, when you bulk copy data into a table with an IDENTITY column, `bcp` assigns each row a temporary IDENTITY column value of 0.

This is effective only when copying data into a table. `bcp` reads the value of the ID column from the data file, but does not send it to the server. Instead, as `bcp` inserts each row into the table, the server assigns the row a unique, sequential, IDENTITY column value, beginning with the value 1.

If you specify the `-E` flag when copying data into a table, `bcp` reads the value from the data file and sends it to the server which inserts the value into the table. If the number of rows inserted exceeds the maximum possible IDENTITY column value, the SAP ASE server returns an error.

The `-E` parameter has no effect when you are bulk copying data out. The SAP ASE server copies the ID column to the data file, unless you use the `-N` parameter.

You cannot use the `-E` and `-g` flags together.

3.7 Bulk Copying Encrypted Data

`bcp` transfers encrypted data in and out of databases in either plain text or cipher text form. By default, `bcp` copies plain text data, data is automatically:

- Encrypted by the SAP ASE server before insertion when executing `bcp in`. Slow `bcp` is used. The user must have `insert` and `select` permission on all columns.
- Decrypted by the SAP ASE server when executing `bcp out`. `select` permission is required on all columns; in addition, `decrypt` permission is required on the encrypted columns.

This example copies the `customer` table out as plain text data in native machine format:

```
bcp uksales.dbo.customer out uk_customers -n -Uroy -Proy123
```

If the data to be copied out as plain text is encrypted by a key that uses an explicit password, supply that password to `bcp` using the `--c password` or `--colpasswd` options.

For example, if the `salary` column in the `employee` table is encrypted by a key that is protected by an explicit password, copy out only the `salary` data as plain text by providing `bcp` with the password, such as:

```
bcp hr.dbo.employee out -c -Upjones -PX15tgo1 --  
colpasswd hr.dbo.employee.salary '4mIneIsonly'
```

Alternatively, if you know the name of the key that encrypts the `salary` column, use:

```
bcp hr.dbo.employee out -c -Upjones -PX15tgo1 --  
keypasswd keydb.dbo.hr_key '4mIneIsonly'
```

`bcp` uses the password to issue a `set encryption passwd` command before selecting the data. Use the `--keypasswd` and `--colpasswd` options in a similar way on the `bcp` command line when copying the data back in.

Use the `-C` option for `bcp` to copy the data as cipher text. When copying cipher text, you may copy data out and in across different operating systems. If you are copying character data as cipher text, both platforms must support the same character set.

The `-C` option for `bcp` allows administrators to run `bcp` when they lack `decrypt` permission on the data. When you use the `-C` option:

- Data is assumed to be in cipher text format during execution of `bcp in`, and the SAP ASE server performs no encryption.
Use the `-C` option only if the file being copied into the SAP ASE server was created using the `-C` option on `bcp out`. The cipher text must have been copied from a column with exactly the same column attributes and encrypted by the same key as the column into which the data is being copied. Fast `bcp` is used. The user must have `insert` and `select` permission on the table.
- `bcp in -C` bypasses the domain rule and check constraint for encrypted columns if either exist on an encrypted column because, in this situation, the SAP ASE server uses fast `bcp`. Domain rules and check constraints do not affect `bcp out -C`.
- If an access rule exists on an encrypted column, using `bcp out -C` results in a 2929 error. Access rules do not affect `bcp in -C`.
- Data is copied out of the SAP ASE server without decryption on `bcp out`. The cipher text data is in hexadecimal format. The user must have `select` permission on all columns. For copying cipher text, `decrypt` is not required on the encrypted columns.
- Encrypted `char` or `varchar` data retains the character set used by the SAP ASE server at the time of encryption. If the data is copied in cipher text format to another server, the character set used on the target server must match that of the encrypted data copied from the source. The character set associated with the data on the source server when it was encrypted is not stored with the encrypted data and is not known or converted on the target server.
You can also perform `bcp` without the `-C` option to avoid the character set issue.
You cannot use the `-J` option (for character set conversion) with the `-C` option.

This example copies the `customer` table:

```
bcp uksales.dbo.customer out uk_customers -C -c -Uroy -Proy123
```

The `cc_card` column is copied out as human-readable cipher text. Other columns are copied in character format. User “roy” is not required to have decrypt permission on `customer cc_card`.

When copying data as cipher text, ensure that the same keys are available in the database when the data is copied back in. If necessary, use the `ddlgen` utility to move keys from one database to another.

3.8 bcp Options

The information in this section clarifies some of the more complex options of the `bcp` syntax.

Related Information

[bcp \[page 30\]](#)

3.8.1 Using the Default Formats

`bcp` provides two command line options that create files with frequently used default formats. These options provide the easiest way to copy data in and out from a SAP ASE server.

- The `-n` option uses “native” (operating system) formats.
- The `-c` option uses “character” (`char` datatype) for all columns. This datatype supplies tabs between fields on a row and a newline terminator, such as a carriage return, at the end of each row.

When you use the native or character options, `bcp` operates noninteractively and only asks you for your SAP ASE password.

3.8.1.1 Native Format

The `-n` option creates files using native (operating system-specific) formats.

Native formats usually create a more compact operating system file. For example, this command copies the `publishers` table to the file called `pub_out`, using native data format:

```
bcp pubs2..publishers out pub_out -n
```

The contents of `pub_out` are:

```
0736^MNew Age Books^FBoston^BMA0877^PBinner & Hardley^J
```

```
Washington^BDC1389^TAlgodata Infosystems^HBerkeley^BCA
```

`bcp` prefixes each field, except the `pub_id`, which is a `char (4)` datatype, with an ASCII character equal to the data length in the field. For example, "New Age Books" is 13 characters long, and `^M` (Ctrl+m) is ASCII 13.

All the table data stored in `pub_out` is in the form of human-readable `char` or `varchar` data. In a table with numeric data, `bcp` writes the information to the file in the operating system's data representation format, which may not be human-readable.

`bcp` can copy data out to a file either as its native (database) datatype or as any datatype for which implicit conversion is supported for the datatype in question. `bcp` copies user-defined datatypes as their base datatype or as any datatype for which implicit conversion is supported. For more information on datatype conversions, see `dbconvert` in the *Open Client DB-Library/C Reference Manual* or the *Adaptive Server Enterprise Reference Manual*.

The `bcp` utility does not support copying data in native format from different operating systems; for example, copying from Windows to UNIX. Use the `-c` flag if you need to use `bcp` to copy files from one operating system to another.

⚠ Caution

Do not use row terminator (`-t`) or field terminator (`-x`) parameters with `bcp` in native format. Results are unpredictable and data may be corrupted.

3.8.1.2 Character Format

Character format (`-c`) uses the `char` datatype for all columns. It inserts tabs between fields in each row and a newline terminator at the end of each row.

For example, this command copies out the data from the `publishers` table in character format to the file `pub_out`:

```
bcp pubs2..publishers out pub_out -c
0736   New Age Books           Boston           MA
0877   Binnet & Hardley         Washington      DC
1389   Algodata Infosystems     Berkeley        CA
```

Although the `MONEY` datatype has a precision of 4 places past the decimal, `isql` displays only 2 places past the decimal (similar to the `FLOAT` datatype, which displays 6 places past the decimal). `bcp` in native mode preserves a `MONEY` datatype column's full precision, but in character mode truncates the values to 2 places.

As a workaround, create a view on the table that converts each `MONEY` datatype column to a `NUMERIC` datatype, and `bcp` out the view instead of the base table:

```
create view titles_out_vu as
select title_id, title, type, pub_id, convert(numeric(19,4), price) as price,
convert(numeric(19,4), advance) as advance, total_sales, notes, pubdate, contract
from titles
```

```
bcp pubs2..titles_out_vu out titles_out.txt -c
```


3.8.2 Change Terminators from the Command Line

Terminators are the characters that separate data fields (field terminators). The row terminator is the field terminator of the last field in the table or file.

Use the `-t<field_terminator>` and `-r<row_terminator>` command line options with the character format option (`-c`) to change the terminators from the command line.

This example uses the comma (,) as the field terminator, and returns (`\r`) as the row terminator.

- In UNIX platforms:

```
bcp pubs2..publishers out pub_out -c -t , -r \\r
```

If necessary, "escape" the backslash for your operating system command shell.

- In Windows:

```
bcp pubs2..publishers out pub_out -c -t , -r \r
```

This `bcp` command line produces the following information:

```
0736,New Age Books,Boston,MA
0877,Binnet & Hardley,Washington,DC
1389,Algodata Infosystems,Berkeley,CA
```

i Note

You can use the `-t` and `-r` options to change the default terminators without including the character option (`-c`).

3.9 Change the Defaults in Interactive bcp

If you do not specify native (`-n`) or character (`-c`) format, `bcp` prompts you interactively

The prompts are for:

- The file storage type
- The prefix length
- The terminator for each column of data to be copied
- A field length for fields that are to be stored as `char` or `binary`

The default values for these prompts produce the same results as using the native format, and provide a simple means for copying data out of a database for reloading into the SAP ASE server later.

If you are copying data to or from the SAP ASE server for use with other programs, base your answers to the prompts on the format required by the other software.

These four prompts provide an extremely flexible system that allows you either to read a file from other software or to create a file that requires little or no editing to conform to many other data formats.

3.9.1 Respond to bcp Prompts

Unless you supplied `bcp` with the `-P` parameter, it prompts you for your password when you copy data in or out using the `-n` (native format) or `-c` (character format) parameters.

If you do not supply either the `-n`, `-c` or `-f <formatfile>` parameter, `bcp` prompts you for information for each field in the table or view.

- Each prompt displays a default value, in brackets, which you can accept by pressing Return. The prompts include:
 - The file storage type, which can be `character` or any valid SAP ASE datatype
 - The prefix length, which is an integer indicating the length in bytes of the following data
 - The storage length of the data in the file for non-NULL fields
 - The field terminator, which can be any character string
 - (Windows) Scale and precision for numeric and decimal datatypes

The row terminator is the field terminator of the last field in the table, view, or file.

- The bracketed defaults represent reasonable values for the datatypes of the field in question. For the most efficient use of space when copying out to a file:
 - Use the default prompts
 - Copy all data in the datatypes defined by their table
 - Use prefixes as indicated
 - Do not use terminators
 - Accept the default lengths

The `bcp` prompts, defaults, and the possible alternate user responses are:

Table 4: Defaults and User Responses for bcp Prompts

Prompt	Default Provided	Possible User Response
File Storage Type	Use database storage type for most fields except: <ul style="list-style-type: none"> ◦ <code>char</code> for <code>varchar</code> ◦ <code>binary</code> for <code>varbinary</code> 	<code>char</code> to create or read a human-readable file; any SAP ASE datatype where implicit conversion is supported.
Prefix Length	<ul style="list-style-type: none"> ◦ 0 for fields defined with <code>char</code> datatype (not storage type) and all fixed-length datatypes ◦ 1 for most other datatypes ◦ 2 for <code>binary</code> and <code>varbinary</code> saved as <code>char</code> ◦ 4 for <code>text</code> and <code>image</code> 	0 if no prefix is desired; otherwise, defaults are recommended.
Storage Length	<ul style="list-style-type: none"> ◦ For <code>char</code> and <code>varchar</code>, use defined length. ◦ For <code>binary</code> and <code>varbinary</code> saved as <code>char</code>, use double the defined length. ◦ For all other datatypes, use maximum length needed to avoid truncation or data overflow. 	Default values, or greater, are recommended.

Prompt	Default Provided	Possible User Response
Field or Row Terminator	None	Up to 30 characters, or one of the following: <ul style="list-style-type: none"> ○ \t – tab ○ \n – newline ○ \r – carriage return ○ \0 – null terminator ○ \ – backslash

- `bcp` can copy data out to a file either as its native (database) datatype, or as any datatype for which implicit conversion is supported. `bcp` copies user-defined datatypes as their base datatype or as any datatype for which implicit conversion is supported. See `dbconvert` in the *Open Client DB-Library/C Reference Manual*.

i Note

Be careful when you copy data from different versions of SAP ASE, because not all versions support the same datatypes.

- A prefix length is a 1-byte, 2-byte, or 4-byte integer that represents the length of each data value in bytes. It immediately precedes the data value in the host file.
- Be sure that fields defined in the database as `char`, `nchar`, and `binary` are always padded with spaces (null bytes for `binary`) to the full length defined in the database. `timestamp` data is treated as `binary(8)`.
- If data in `varchar` and `varbinary` fields is longer than the length you specify for copy out, `bcp` silently truncates the data in the file at the specified length.
- A field terminator string can be up to 30 characters long. The most common terminators are a tab (entered as “\t” and used for all columns except the last one), and a newline (entered as “\n” and used for the last field in a row). Other terminators are: “\0” (the null terminator), “\” (backslash), and “\r” (Return). When choosing a terminator, be sure that its pattern does not appear in any of your character data. For example, if you use tab terminators with a string that contains a tab, `bcp` cannot identify which tab represents the end of the string. `bcp` always looks for the first possible terminator, in this case, it will find the wrong one.
- When a terminator or prefix is present, it affects the actual length of data transferred. If the length of an entry being copied out to a file is smaller than the storage length, it is followed immediately by the terminator, or the prefix for the next field. The entry is not padded to the full storage length (`char`, `nchar`, and `binary` data is returned from the SAP ASE server already padded to the full length).
- When copying in from a file, data is transferred until either the number of bytes indicated in the “Length” prompt has been copied, or the terminator is encountered. Once a number of bytes equal to the specified length has been transferred, the rest of the data is flushed until the terminator is encountered. When no terminator is used, the table storage length is strictly observed.
- These tables show the interaction of prefix lengths, terminators, and field length on the information in the file. “P” indicates the prefix in the stored table; “T” indicates the terminator; and dashes, “--”, show appended spaces. “...” indicates that the pattern repeats for each field. The field length is 8 for each column, and “string” represents the 6-character field each time.

Table 5: SAP ASE char data

	Prefix length 0	Prefix length 1, 2, or 4
No terminator	string--string--	Pstring--Pstring--
Terminator	string-Tstring-T	Pstring-TPstring-T

Table 6: Other datatypes converted to char storage

	Prefix length 0	Prefix length 1, 2, or 4
No terminator	string--string--	PstringPstring
Terminator	stringTstringT	PstringTPstringT

- The file storage type and length of a column do not have to be the same as the type and length of the column in the database table. However, if types and formats copied in are incompatible with the structure of the database table, the copy fails.
- File storage length generally indicates the maximum amount of data to be transferred for the column, excluding terminators and prefixes.
- When copying data into a table, `bcp` observes any defaults defined for columns and user-defined datatypes. However, `bcp` ignores rules to load data at the fastest possible speed.
- Because `bcp` considers any data column that can contain null values to be variable length, use either a length prefix or terminator to denote the length of each data row.
- Data written to a host file in its native format preserves all of its precision. `datetime` and `float` values preserve all of their precision even when they are converted to character format. The SAP ASE server stores money values to a precision of one ten-thousandth of a monetary unit. However, when money values are converted to character format, their character format values are recorded only to the nearest two places.
- Before copying data in character format from a file into a database table, check the datatype entry rules in the *Datatypes in Reference Manual: Building Blocks*. Character data that is copied into the database with `bcp` must conform to those rules. Dates in the undelimited `<(yy) yymmdd>` format may result in overflow errors if the year is not specified first.
- When you send host data files to sites that use terminals different from your own, inform them of the `datafile_charset` that you used to create the files.

3.9.2 File Storage Type

The file storage type prompt offers you choices about how to store the data in the file.

Copy data into a file as:

- Its database table type,
- A character string, or
- Any datatype for which implicit conversion is supported.

i Note

`bcp` copies user-defined datatypes as their base types.

Table 7: File storage datatypes for bcp

Table Datatype	Storage Type
char, varchar	c[har]
text	T[ext]
int	i[nt]
smallint	s[mallint]
tinyint	t[inyint]
float	f[loat]
money	m[oney]
bit	b[it]
datetime	d[atetime]
binary, varbinary, timestamp	x
image	I[mage]
smalldatetime	D
real	r
smallmoney	M
numeric	n
decimal	e

The table shows the default storage type for each SAP ASE datatype and the abbreviations that are acceptable to bcp.

- For the most compact storage, use the default value.
- For character files, use char.
- The date storage type is the SAP ASE internal storage format of datetime, not the host operating system format of the date.
- timestamp data is treated as binary(8).

The brackets [] in the table indicate that you can use the initial character or the beginning characters of the word. For example, for "bit" use "b," "bi," or "bit."

To display this list while using bcp interactively, type a question mark (?) in response to the prompt Enter the file storage type.

The values that appear in the prompts are the defaults. Your response determines how the data is stored in the output file; you need not indicate the column's type in the database table.

`bcp` fails if you enter a type that is neither implicitly convertible or `char`. For example, you may not be able to use `smallint` for `int` data (you may get overflow errors), but you can use `int` for `smallint`.

When storing noncharacter datatypes as their database types, `bcp` writes the data to the file in the SAP ASE server's internal data representation format for the host operating system, rather than in human-readable form.

Before copying data that is in character format from a file into a database table, check the datatype entry rules in the *Reference Manual: Building Blocks*. Character data copied into the database with `bcp` must conform to those rules. If you do not specify the year first, dates in the undelimited `<(yy) yymmdd>` format may result in overflow errors.

When you send host data files to sites that use terminals different from your own, inform them of the `datafile_charset` that you used to create the files.

3.9.3 Prefix Length

By default, `bcp` precedes each field that has a variable storage length with a string of one or more bytes indicating the length of the field, which enables the most compact file storage.

The default values in the prompts indicate the most efficient prefix length. For:

- Fixed-length fields – the prefix length should be 0.
- Fields of 255 bytes or less – the default prefix length is 1.
- `text` or `image` datatypes – the default prefix length is 4
- `binary` and `varbinary` datatypes being converted to `char` storage types – the default prefix length is 2, since each byte of table data requires 2 bytes of file storage.
- `binary`, `varbinary`, and `image` data – use even numbers for the prefix and length. This maintains consistency with the SAP ASE server, which stores data as an even number of hexadecimal digits.
- Any data column that permits null values – use a prefix length, other than 0, or a terminator to denote the length of each row's data. `bcp` considers such columns, including columns with integer datatypes that might ordinarily be considered fixed-length columns, to be of variable length.
- Data with no prefix before its column – use a prefix length of 0.

A prefix length is a 1-, 2-, or 4-byte integer that represents the length of each data value in bytes, and it immediately precedes the data value in the host file.

Unless you supply a terminator, `bcp` pads each stored field with spaces to the full length specified at the next prompt, "length."

Because prefix lengths consist of **native** format integers, the resulting host file contains nonprintable characters, which could prevent you from printing the host file or from transmitting it through a communications program that cannot handle non-human-readable characters.

3.9.4 Field length

In almost all cases, use the `bcp` default value for the storage length while copying data out.

i Note

The terms “length” and “storage length” in this discussion refer to the operating system file, not to SAP ASE field lengths.

If you are creating:

- A file to reload into the SAP ASE server – the default prefixes and length keep the storage space needed to a minimum.
- A human-readable file – the default length prevents the truncation of data or the creation of overflow errors that cause `bcp` to fail.

Be familiar with the data to transfer, since you can change the default length by supplying another value. If you are copying character data in from other software, examine the source file carefully before choosing length values.

i Note

If the storage type is noncharacter, `bcp` stores the data in the operating system’s native data representation and does not prompt for a length.

When `bcp` converts noncharacter data to character storage, it suggests a default field length large enough to store the data without truncating `datetime` data or causing an overflow of numeric data.

- The default lengths are the number of bytes needed to display the longest value for the SAP ASE datatype.

Table 8: Default Field Lengths for Noncharacter to Character Datatypes

Datatype	Default Size
<code>int</code>	12 bytes
<code>smallint</code>	6 bytes
<code>tinyint</code>	3 bytes
<code>float</code>	25 bytes
<code>money</code>	24 bytes
<code>bit</code>	1 byte
<code>datetime</code>	26 bytes
<code>smalldatetime</code>	26 bytes
<code>real</code>	25 bytes

Datatype	Default Size
<code>smallmoney</code>	24 bytes

- If you specify a field length that is too short for numeric data when copying data out, `bcp` prints an overflow message and does not copy the data.
- The default length for `binary` and `varbinary` fields is twice the length defined for the column, since each byte of the field requires 2 bytes of file storage.
- If you accept the default storage length, the actual amount of storage space allocated depends on whether you specify a prefix length and terminators. If you specify a prefix length of:
 - 1, 2, or 4 – `bcp` uses a storage space of the actual length of the data, plus the length of the prefix, plus any terminators.
 - 0 and no terminator – `bcp` allocates the maximum amount of space shown in the prompt, which is the maximum space that may be needed for the datatype in question. `bcp` treats the field as if it were fixed length to determine where one field ends and the next begins.
For example, if the field is defined as `varchar(30)`, `bcp` uses 30 bytes for each value, even if some of the values are only 1 character long.
- Fields defined in the database as `char`, `nchar`, and `binary`, and those that do not permit null values, are always padded with spaces (null bytes for binary) to the full length defined in the database. `timestamp` data is treated as `binary(8)`.
- If data in the `varchar` and `varbinary` fields is longer than the length specified for copy out, `bcp` silently truncates the data in the file at the specified length.
- `bcp` does not know how large any one data value will be before copying all the data, so it always pads `char` datatypes to their full specified length.
- The file storage type and length of a column need not be the same as the type and length of the column in the database table. The copy fails if the types and formats copied in are incompatible with the structure of the database table.
- File storage length generally indicates the maximum amount of transferable data for the column, excluding terminators and/or prefixes.
- When copying data into a table, `bcp` observes any defaults defined for columns and user-defined datatypes, but ignores rules in order to load data at the fastest possible speed.
- `bcp` considers any data column that can contain a null value to be variable length, so use either a length prefix or a terminator to denote the length of each row of data.
- The file storage type and length of a column need not be the same as the type and length of the column in the database table. (If types and formats copied in are incompatible with the structure of the database table, the copy fails.)

3.9.5 Field and Row Terminators

Use a terminator to mark the end of a column or row, separating one from the next. The default is no terminator.

- Field terminators separate table columns.
- A row terminator is a field terminator for the last field in the row of the table or file.

Terminators are very useful for dealing with character data because you can choose human-readable terminators. The `bcp` character option, which uses tabs between each column with a newline terminator at the end of each row, is an example of using terminators that enhance the readability of a data file.

Supply your own terminators when you prepare data for use with other programs, and you want to use `bcp` to prepare tabular data. The available terminators are:

- Tabs, indicated by `\t`
- New lines, indicated by `\n`
- Carriage returns, indicated by `\r`
- Backslash, indicated by `\`
- Null terminators (no visible terminator), indicated by `\0`
- Any printable character, for example, `*`, `A`, `t`, `|`
- Strings of up to 10 printable characters, including some or all of the terminators listed above (for example, `**\t**`, `end`, `!!!!!!!!!!`, and `\t--\n`)

i Note

Control characters (ASCII 0–25) cannot be printed.

3.9.5.1 Choose Terminators

Choose terminators with patterns that do not appear in any of the data.

For example, using a tab terminator with a string of data that also contains a tab creates ambiguity: which tab represents the end of the string? `bcp` always looks for the first possible terminator, which in this case would be incorrect, since the first tab it would encounter would be part of the data string.

Data in native format can also conflict with terminators. If the values of these integers are not strictly limited in a column containing a 4-byte integer in native format, it is impossible to choose a terminator that is guaranteed not to appear inside the data. Use `bcp`'s native format option for data in native format.

i Note

“No terminator” differs from a “null terminator,” which is an invisible—but real—character.

- A field terminator string can be up to 30 characters long. The most common terminators are a tab (entered as `\t` and used for all columns except the last one), and a newline (entered as `\n` and used for the last field in a row). Other terminators are: `\0` (the null terminator), `\` (backslash), and `\r` (Return). When choosing a terminator, its pattern cannot appear in any of your character data, since `bcp` always looks for the first possible terminator.

For example, if you used tab terminators with a string that contained a tab, `bcp` cannot identify which tab represents the end of the string. `bcp` always looks for the first possible terminator, so, in this example it would find the wrong one.

A terminator or prefix affects the actual length of data transferred:

When a terminator or prefix is present, it affects the length of data transferred. If the length of an entry being copied out to a file is less than the storage length, it is immediately followed by the terminator or the prefix for the next field. The entry is not padded to the full storage length (`char`, `nchar`, and `binary` data is returned from the SAP ASE server already padded to the full length).

When `bcp` is copying in from a file, data is transferred until either the number of bytes indicated in the “Length” prompt has been copied or the terminator is encountered. Once the number of bytes equal to the specified length has been transferred, the rest of the data is flushed until the terminator is encountered. When no terminator is used, the table storage length is strictly observed.

- Fields stored as `char` (except `char`, `nchar`, and `binary` fields) instead of their database datatypes take less file storage space with the default length and prefix or a terminator. `bcp` can use either a terminator or a prefix to determine the most efficient use of storage space. `bcp` suggests the maximum amount of storage space required for each field as the default. For `char` or `varchar` data, `bcp` accepts any length.
- The following two tables show the interaction of prefix lengths, terminators, and field length on the information in the file. “P” indicates the prefix in the stored table; “T” indicates the terminator; and dashes, (--) show appended spaces. An ellipsis (...) indicates that the pattern repeats for each field. The field length is 8 bytes for each column; “string” represents the 6-character field each time.

Table 9: SAP ASE char Data

	Prefix length = 0	Prefix length=1, 2, or 4
No terminator	string--string--...	Pstring--Pstring--...
Terminator	string-Tstring-T...	Pstring--TPstring-T...

Table 10: Other Datatypes Converted to char Storage


	Prefix length = 0	Prefix length=1, 2, or 4
No terminator	string--string--...	PstringPstring...
Terminator	stringTstringT...	PstringTPstringT...

3.10 Format Files

After gathering information about each field in the table, `bcp` asks if you want to save the information to a format file and prompts for the file name.

Using a format file created for the data to be copied with `bcp` allows you to copy data in or out noninteractively without being prompted by `bcp` for information, since the format file supplies the information that `bcp` needs. Use this newly created format file at any other time to copy the data back into the SAP ASE server or to copy data out from the table.

The figure illustrates the format of the `bcp` format files. It shows the `publishers` table from the `pubs2` database, with all the host file columns in character format, with no prefix, and using the default data length, a newline terminator at the end of the final column of a row, and tabs as terminators for all other columns.

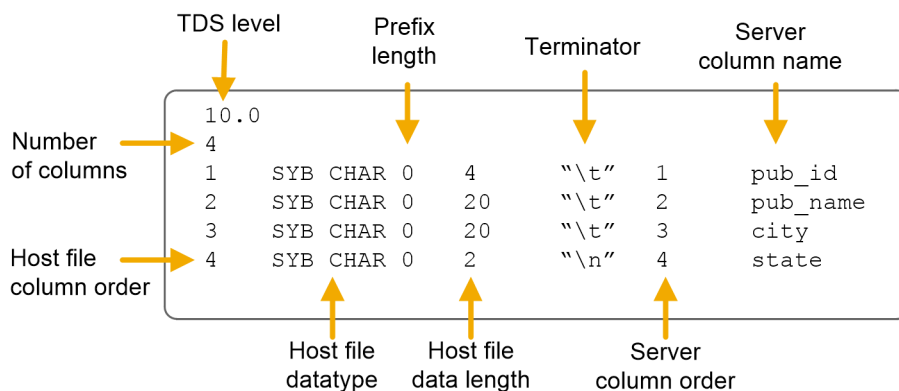

Using this format file example, the names of the various elements of a `bcp` format file are:

- The Tabular Data Stream (TDS) version is always the first line of the file. It specifies the version of TDS that you are using, not the SAP ASE version, and appears as a literal string without quotation marks. In the figure, the version is 10.0.
- The second line of a `bcp` format file is the number of columns, which refers to the number of records in the format file, not including lines 1 and 2. Each column in the host table has one line.
- One line for each column follows the first and second lines in the database table. Each line consists of elements that are usually separated by tabs, except for the host file datatype and the prefix length which are usually separated by a space. These elements are:

Elements	Description
Host file column order	The host file column order is the sequential number of the field in the host data file, which begins numbering at 1.
Host file datatype	<p>The host file datatype refers to the storage format of the field in the host data file, not the datatype of the database table column. See the next table for the list of host file datatypes and their storage formats.</p> <p>Data written to a host file in its native format preserves all of its precision. <code>datetime</code> and <code>float</code> values preserve all of their precision, even when they are converted to character format. The SAP ASE server stores <code>money</code> values to a precision of one ten-thousandth of a monetary unit. However, when <code>money</code> values are converted to character format, their character format values are recorded only to the nearest two places.</p> <p>See <i>System and User-Defined Datatypes</i> in the <i>Reference Manual: Building Blocks</i> for descriptions and appropriate uses of SAP ASE datatypes.</p>
Prefix length	<p>Prefix length indicates the number of bytes in the field length prefix. The prefix length is a 0-, 1-, 2-, or 4-byte unsigned integer value embedded in the host data file that specifies the actual length of data contained in the field. Some fields may have a length prefix while others do not.</p> <p>The allowable prefix length values in bytes, and their ranges are:</p> <ul style="list-style-type: none"> • 0. Range: No prefix • 1. Range: 2^8-1; 0-255 • 2. Range: $2^{16}-1$; 0-65535 • 4. Range: $2^{32}-1$; 0-4,294,967,295

Elements	Description
Host file data length	<p>Host file data length refers to the maximum number of bytes to copy for the field.</p> <p>To decide how much data to copy in or out, <code>bcp</code> uses one of:</p> <ul style="list-style-type: none"> • The maximum field length • The prefix length, if any • The field terminator string, if any <p>If more than one method of field length specification is given, <code>bcp</code> chooses the one that copies the least amount of data.</p>
Terminator	The terminator can be up to 30 bytes of characters enclosed in quotation marks (" "). The terminator designates the end of data for the host data file field.
Server column order	The server column order represents the <code>colid</code> (column ID) of the <code>syscolumns</code> column into which the host data file column is to be loaded. Together with the host file column order, this element maps host data file fields to the database table columns.
Server column name	The server column name is the name of the database table column into which this field is to be loaded.
Column precision	The column precision is the precision of the database table column into which this field is to be loaded. This element is present only if the storage format is <code>numeric</code> or <code>decimal</code> .
Column scale	The column scale is the scale of the database table column into which this field is to be loaded. This element is present only if the storage format is <code>numeric</code> or <code>decimal</code> .

Table 11: Host File Datatype Storage Formats

SYBCHAR	<code>char</code> , <code>chvarchar (ASCII)</code> , <code>nchar</code> , <code>nvarchar</code>
SYBTEXT	<code>text</code>
SYBBINARY	<code>binary</code> , <code>timestamp</code> , <code>unichar</code> , <code>univarchar</code> , <code>varbinary</code>
SYBIMAGE	<code>image</code>
SYBINT1	<code>tinyint</code>
SYBINT2	<code>smallint</code>
SYBINT4	<code>int</code>
SYBINT8	<code>bigint</code>
SYBFLT8	<code>float</code>
SYBREAL	<code>real</code>
SYBBIT	<code>bit</code>
SYBNUMERIC	<code>numeric</code>
SYBDECIMAL	<code>decimal</code>

SYBMONEY	money
SYBMONEY4	smallmoney
SYBDATETIME	datetime
SYBDATETIME4	smalldatetime
SYBDATE	date
SYBTIME	time
SYBUINT8	unsigned bigint
SYBUINT4	unsigned int
SYBUINT2	unsigned smallint
SYBUNITEXT	unitext
SYBFLT8	double

3.11 Examples of Copying Out Data Interactively

By changing the default values of the prompts to `bcp`, you can prepare data for use with other software.

To create a human-readable file, respond to the `bcp` prompts:

- File storage type, enter 0.
- Prefix length, enter 0.
- Field length, accept the default.
- Terminator – the field terminator you enter depends on the software that you plan to use.
 - Choose between delimited fields or fixed-length fields. Always use `\n`, the newline terminator, to terminate the last field.
For fixed-length fields, do not use a terminator. Each field has a fixed length, with spaces to pad the fields. Adjacent fields, where the data completely fills the first field seem to run together, since there are no field separators on each line of output. See the example below.
 - For comma-delimited output, use a comma (,) as the terminator for each field. To create tabular output, use the tab character (`\t`).

Example: Copy Out Data with Field Lengths

This example uses fixed-length fields to create output in the personal computer format called SDF (system data format). This format can be easily read or produced by other software.

```
bcp pubs2..sales out sal_out
```

The results as stored in the `sal_out` file are:

```
5023      AB-123-DEF-425-123      Oct 31 1985 12:00AM
```

```

5023 AB-872-DEF-732-2Z1 Nov 6 1985 12:00AM
5023 AX-532-FED-452-2Z7 Dec 1 1990 12:00AM
5023 BS-345-DSE-860-1F2 Dec 12 1986 12:00AM
5023 GH-542-NAD-713-9F9 Mar 15 1987 12:00AM
5023 NF-123-ADS-642-9G3 Jul 18 1987 12:00AM
5023 XS-135-DER-432-8J2 Mar 21 1991 12:00AM
5023 ZA-000-ASD-324-4D1 Jul 27 1988 12:00AM
5023 ZD-123-DFG-752-9G8 Mar 21 1991 12:00AM
5023 ZS-645-CAT-415-1B2 Mar 21 1991 12:00AM
5023 ZZ-999-ZZZ-999-0A0 Mar 21 1991 12:00AM
6380 234518 Sep 30 1987 12:00AM
6380 342157 Dec 13 1985 12:00AM
6380 356921 Feb 17 1991 12:00AM
7066 BA27618 Oct 12 1985 12:00AM
7066 BA52498 Oct 27 1987 12:00AM
7066 BA71224 Aug 5 1988 12:00AM
7067 NB-1.142 Jan 2 1987 12:00AM
7067 NB-3.142 Jun 13 1990 12:00AM
7131 Asoap132 Nov 16 1986 12:00AM
7131 Asoap432 Dec 20 1990 12:00AM
7131 Fsoap867 Sep 8 1987 12:00AM
7896 124152 Aug 14 1986 12:00AM
7896 234518 Feb 14 1991 12:00AM
8042 12-F-9 Jul 13 1986 12:00AM
8042 13-E-7 May 23 1989 12:00AM
8042 13-J-9 Jan 13 1988 12:00AM
8042 55-V-7 Mar 20 1991 12:00AM
8042 91-A-7 Mar 20 1991 12:00AM
8042 91-V-7 Mar 20 1991 12:00AM

```

The contents of the `sal_fmt` format file are:

```

10.0
3
1 SYBCHAR 04 "" 1 stor_id
2 SYBCHAR 020 "" 2 ord_num
3 SYBCHAR 026 "" 3 date

```

Example: Comma-delimited, Newline-delimited with Format File

In this example, `bcp` copies data interactively from the `publishers` table to a file:

```
bcp pubs2..publishers out pub_out
```

The results as stored in the `pub_out` file are:

```

0736,New Age Books,Boston,MA
0877,Binnet & Hardley,Washington,DC
1389,Algodata Infosystems,Berkeley,CA

```

The contents of the `pub_fmt` format file are:

```

10.0
4
1 SYBCHAR 0 4 "," 1 pub_id
2 SYBCHAR 0 40 "," 2 pub_name
3 SYBCHAR 0 20 "," 3 city
4 SYBCHAR 0 2 "\n" 4 state

```

This example creates:

- An output file with commas between all fields in a row and a newline terminator at the end of each row
- A format file (`pub_fmt`) that you can use later to copy the same or similar data back into the SAP ASE server

Example: Tab-delimited with Format File

This example creates tab-delimited output from the table `pubs2..publishers` in the `pub_out` file:

```
bcp pubs2..publishers out pub_out
```

The results as stored in the `pub_out` file are:

0736	New Age Books	Boston	MA
0877	Binnet & Hardley	Washington	DC
1389	Algodata Infosystems	Berkeley	CA

The contents of the `pub_fmt` format file are:

```
10.0
4
1 SYBCHAR 04 "\t" 1 pub_id
2 SYBCHAR 040 "\t" 2 pub_name
3 SYBCHAR 020 "\t" 3 city
4 SYBCHAR 02 "\n" 4 state
```

Related Information

[Format Files \[page 234\]](#)

3.12 Examples of Copying In Data Interactively

To copy in data successfully to a table from a file, know what the terminators in the file are or what the field lengths are and specify them when you use `bcp`.

The following examples show how to copy data in, either with fixed field lengths or with delimiters, using `bcp` with or without a format file.

Example: Copy In Data with Field Lengths

In this example, `bcp` copies data from the `salesnew` file into the `pubs2..sales` table.

In the `salesnew` file are three fields: the first is 4 characters long, the second is 20, and the third is 26 characters long. Each row ends with a newline terminator (`\n`):

```
5023ZS-731-AAB-780-2B9      May 24 1993 12:00:00:000AM
5023XC-362-CFB-387-3Z5      May 24 1993 12:00:00:000AM
6380837206                  May 24 1993 12:00:00:000AM
6380838441                  May 24 1993 12:00:00:000AM
```

Use the following command to copy in the data interactively from `salesnew`:

```
bcp pubs2..sales in salesnew
```

The system responds to the `bcp` command:

```
Password:
Enter the file storage type of field stor_id [char]:
Enter prefix-length of field stor_id [0]:
Enter length of field stor_id [4]:
Enter field terminator [none]:
Enter the file storage type of field ord_num [char]:
Enter prefix-length of field ord_num [1]: 0
Enter length of field ord_num [20]:
Enter field terminator [none]:
Enter the file storage type of field date [datetime]: char
Enter prefix-length of field date [1]: 0
Enter length of field date [26]:
Enter field terminator [none]: \n
Do you want to save this format information in a file? [Y/n] y
Host filename [bcp.fmt]: salesin_fmt
Starting copy...
4 rows copied.
Clock Time (ms.): total = 1 Avg = 0 (116000.00 rows per sec.)
```

When you log in to the SAP ASE server and access `sales`, you see the following data from `salesnew` appended to the table:

```
select * from sales
stor_id  ord_num      date
-----
5023     AB-123-DEF-425-1Z3  Oct 31 1985 12:00AM
5023     AB-872-DEF-732-2Z1  Nov 6 1985 12:00AM
5023     AX-532-FED-452-2Z7  Dec 1 1990 12:00AM
5023     BS-345-DSE-860-1F2  Dec 12 1986 12:00AM
5023     GH-542-NAD-713-9F9  Mar 15 1987 12:00AM
5023     NF-123-ADS-642-9G3  Jul 18 1987 12:00AM
5023     XS-135-DER-432-8J2  Mar 21 1991 12:00AM
5023     ZA-000-ASD-324-4D1  Jul 27 1988 12:00AM
5023     ZD-123-DFG-752-9G8  Mar 21 1991 12:00AM
5023     ZS-645-CAT-415-1B2  Mar 21 1991 12:00AM
5023     ZZ-999-ZZZ-999-0A0  Mar 21 1991 12:00AM
6380     234518              Sep 30 1987 12:00AM
6380     342157              Dec 13 1985 12:00AM
6380     356921              Feb 17 1991 12:00AM
7066     BA27618             Oct 12 1985 12:00AM
7066     BA52498             Oct 27 1987 12:00AM
7066     BA71224             Aug 5 1988 12:00AM
7067     NB-1.142            Jan 2 1987 12:00AM
7067     NB-3.142            Jun 13 1990 12:00AM
7131     Asoap132            Nov 16 1986 12:00AM
7131     Asoap432            Dec 20 1990 12:00AM
7131     Fsoap867            Sep 8 1987 12:00AM
7896     124152              Aug 14 1986 12:00AM
7896     234518              Feb 14 1991 12:00AM
```



```

8042      12-F-9          Jul 13 1986 12:00AM
8042      13-E-7          May 23 1989 12:00AM
8042      13-J-9          Jan 13 1988 12:00AM
8042      55-V-7          Mar 20 1991 12:00AM
8042      91-A-7          Mar 20 1991 12:00AM
8042      91-V-7          Mar 20 1991 12:00AM
(34 rows affected)

```

Since there is a unique clustered index on the `stor_id` and `ord_num` columns of `sales`, the new rows were sorted in order.

A conflict or violation can affect the copy process:

- Had there been any violations of the unique index on the columns in the data being copied from the file, `bcp` would have discarded the entire batch in which the violating row was encountered. A batch size of 1 evaluates each row individually, but loads more slowly and creates a separate data page for each row during a fast or fast-logged `bcp` session.
- If the types copied in are incompatible with the database types, the entire copy fails.

Example: Copy In Data with Delimiters

In this example, `bcp` copies data from the file `newpubs` into the table `pubs2..publishers`. In the `newpubs` file, each field in a row ends with a tab character (`\t`) and each row ends with a newline terminator (`\n`):

```

1111 Stone Age Books      Boston      MA
2222 Harley & Davidson   Washington  DC
3333 Infodata Algosystems Berkeley    CA

```

Since `newpubs` contains all character data, use the character command-line flag and specify the terminators with command line options:

- In UNIX platforms:

```
bcp pubs2..publishers in newpubs -c -t\t -r\n
```

- In Windows:

```
bcp pubs2..publishers in newpubs -c -t\t -r\n
```

Example: Copy In Data with a Format File

To copy data back into the SAP ASE server using the saved `pub_fmt` format file, run:

```
bcp pubs2..publishers in pub_out -fpub_fmt
```

Use the `pub_fmt` file to copy any data with the same format into the SAP ASE server. If you have a similar data file with different delimiters, change the delimiters in the format file.

Similarly, edit the format file to reflect any changes to the field lengths, as long as all fields have the same length. For example, the `moresales` file contains:

```
804213-L-9 Jan 21 1993 12:00AM
804255-N-8 Mar 12 1993 12:00AM
804291-T-4 Mar 23 1993 12:00AM
804291-W-9 Mar 23 1993 12:00AM
```

Edit the `sal_fmt` format file to read:

```
10.0
3
1 SYBCHAR 0 4 "" 1 stor_id
2 SYBCHAR 0 7 "" 2 ord_num
3 SYBCHAR 0 21 "\n" 3 date
```

Then enter:

- For UNIX platforms:

```
bcp pubs2..sales in moresales -fsal_fmt
```

- For Windows:

```
bcp pubs2..sales in moresale -fsal_fmt
```

The system responds:

```
Starting copy...
4 rows copied.
Clock Time (ms.): total = 1 Avg = 0 (116000.00 rows
per sec.)
```

3.13 bcp and Alternate Languages

The SAP ASE server stores data using its default character set, which is configured during installation. If your terminal does not support that default character set, it may send confusing characters to `bcp` when you respond to prompts either by typing or by using host file scripts.

Omitting all character-set options causes `bcp` to use the character set that was named as the default for the platform. This default can cause communications problems:

- The default is not necessarily the same character set that was configured for the SAP ASE server.
- The default may not necessarily be the character set that the client is using.

For more information about character sets and the associated flags, see *Configuring Client/Server Character Set Conversions* in the *System Administration Guide*.

3.14 Support for Initialization Strings

The `bcp` utility supports sending Transact-SQL commands, such as `set replication off`, to the SAP ASE server before data is transferred.

Although you may use any Transact-SQL command as an initialization string for `bcp`, reset possible permanent changes to the server configuration after running `bcp`. For example, reset changes in a separate `isql` session.

3.15 bcp and Row-Level Access Rules

If the SAP ASE server is enabled for row-level access, and you bulk-copy-out data, `bcp` copies out only the rows of data to which you have access. To copy out the entire table, first drop the access rules, then `bcp out`. Reinststate the access rules after you are done, if applicable.

If you bulk-copy-in data to a table that has access rules enabled, the SAP ASE server may issue “uniqueness violation” errors. For example, if you load data from a `bcp` data file that was generated before the access rules were created on the table, and the `bcp` data file contains rows that were previously inserted into the table, you may receive this type of error.

If this happens, the table may look to the user like it does not include the rows that failed the `bcp` insert because of the uniqueness violation, but the user does not have access to the “missing” rows because of the access rules.

To copy in the entire table, drop the access rules, load the data, address any errors, then reinststate the access rules.

3.16 Copy In and Batch Files

Batching applies only to bulk copying in; it has no effect when copying out. By default, the SAP ASE server copies all the rows in batches of 1000 lines. To specify a different batch size, use the command-line option (`-b`).

`bcp` copies each batch in a single transaction. If the SAP ASE server rejects any row in the batch, the entire transaction is rolled back. By default, `bcp` copies all rows in a single batch; use the `-b` parameter to change the default batch size. The SAP ASE server considers each batch a single `bcp` operation, writes each batch to a separate data page, and continues to the next batch, regardless of whether the previous transaction succeeded.

When data is being copied in, it can be rejected by either the SAP ASE server or `bcp`.

- The SAP ASE server treats each batch as a separate transaction. If the server rejects any row in the batch, it rolls back the entire transaction.
- When `bcp` rejects a batch, it then continues to the next batch. Only fatal errors roll back the transaction.
- The SAP ASE server generates error messages on a batch-by-batch basis, instead of row-by-row, and rejects each batch in which it finds an error. Error messages appear on your terminal and in the error file.

3.16.1 Improve Recoverability

Ensure better recoverability with these actions.

- Break large input files into smaller units.
For example, if you use `bcp` with a batch size of 100,000 rows to bulk copy in 300,000 rows, and a fatal error occurs after row 200,000, `bcp` would have successfully copied in the first two batches—200,000 rows—to the SAP ASE server. If you had not used batching, `bcp` would not have been able to copy in any rows to the SAP ASE server.
- Set the `trunc log on chkpt` to `true (on)`.
The log entry for the transaction is available for truncation after the batch completes. If you copy into a database that has the `trunc log on chkpt` database option set on (`true`), the next automatic checkpoint removes the log entries for completed batches. This log cleaning breaks up large `bcp` operations and keeps the log from filling.
- Set `-b <batch_size>` to 10.
The batch size parameter set to 10 causes `bcp` to reject the batch of 10 rows, including the defective row. The error log from this setting allows you to identify exactly which row failed. A batch size of 1 is the smallest that `bcp` processes.

Note

`bcp` creates 1 data page per batch, and setting `b <batch_size>` to 10 creates data pages with 10 rows on each page. If you set `-b <batch_size>` to 1, the setting creates data pages with 1 row on each page. This setting causes the data to load slowly and takes up storage space.

3.16.2 Batches and Partitioned Tables

When you bulk copy data into a partitioned table without specifying a partition number, the SAP ASE server randomly assigns each batch to an available partition. Copying rows in a single batch places all those rows in a single partition, which can lead to load imbalance in the partitioned table.

To help keep partitioned tables balanced, use a small batch size when bulk copying data or specify the partition ID during the `bcp` session. For information about partitioning tables, see the *Performance and Tuning Guide*.

3.17 Copy Out and Text and Image Data

When you copy out `text` or `image` data, the SAP ASE server, by default, copies only the first 32K of data in a `text` or `image` field.

The `-T <text_or_image_size>` parameter allows you to specify a different value. For example, if the `text` field to copy out contains up to 40K of data, use the following command to copy out all 40K:

```
bcp pubs2..publishers out -T40960
```

i Note

If a `text` or `image` field is larger than the given value or the default, `bcp` does not copy out the remaining data.

3.18 Specify a Network Packet Size

To improve the performance of large bulk copy operations, you may want to use larger network packet sizes than the defaults. The `-A <size>` option specifies the network packet size to use for the `bcp` session that you are beginning.

The value of `<size>` must be:

- Between the values of the `default network packet size` and `max network packet size` configuration parameters, and
- A multiple of 512.

i Note

The new packet size remains in effect for the current `bcp` session only.

For example, this command specifies that the SAP ASE server send 40K of `text` or `image` data using a packet size of 4096 bytes for the `bcp` session:

```
bcp pubs2..authors out -A 4096 -T40960
```

3.19 Copy In and Error Files

When you specify the `-e <error_file>` option with `copy in`, `bcp` stores the rows that it cannot copy in to Adaptive Server in the specified error file.

- The error file stores a line that:
 - Indicates which row failed and the error that occurred, and
 - Is an exact copy of the row in the host file.
- If the file name specified after `-e` already exists, `bcp` overwrites the existing file.
- If `bcp` does not encounter any errors, it does not create the file.

`bcp in` detects two types of errors:

- Data conversion errors
- Errors in building the row – for example, attempts to insert a NULL into columns that do not accept null values or to use invalid data formats, such as a 3-byte integer

The copy in process displays error messages on your monitor.

This example loads the `newpubs` file into the `publishers` database, storing any error rows in the `pub_err` file:

```
bcp pubs2..publishers in newpubs -epub_err
```

When working with error files generated by `copy in`, note:

- `bcp` stores rows in an error file only when the `bcp` program itself detects the error.
- `bcp` continues to copy rows until `bcp` encounters the maximum number of error rows, at which point `bcp` stops the copy.
- `bcp` sends rows to the SAP ASE server in batches, so `bcp` cannot save copies of rows that are rejected by the SAP ASE server, for example, a duplicate row for a table that has a unique index.
- The SAP ASE server generates error messages on a batch-by-batch basis, instead of row-by-row, and rejects the entire batch if it finds an error.
- It is not considered an error for the SAP ASE server to reject duplicate rows if either `allow_dup_row` or `ignore_dup_key` was set when a table's index was created. The copy proceeds normally, but the duplicate rows are neither stored in the table nor in the `bcp` error file.

3.20 Copy Out and Error Files

During the copy out process, as with `copy in`, `bcp` overwrites any file of the same name and does not create an error file if no errors occurred.

There are two situations that cause rows to be logged in the error file during a `copy out`:

- A data conversion error in one of the row's columns
- An I/O error in writing to the host file

When working with error files generated by `copy out`, note that:

- `bcp` logs rows in the error file in the default character format.
- All data values print as characters with tabs between the columns and a newline terminator at the end of each row.

3.21 Data Integrity for Defaults, Rules, and Triggers

To ensure integrity, `bcp` handles data to copy depending upon its element.

Element Type	Description
Defaults and datatypes	When copying data into a table, <code>bcp</code> observes any defaults defined for the columns and datatypes. That is, if there is a null field in the data in a file, <code>bcp</code> loads the default value instead of the null value during the copy.

Element Type	Description
--------------	-------------

For example, here are two rows in a file to be loaded into `authors`:

```
409-56-7008,Bennet,David,415 658-9932,622 Pine
St.,Berkeley,CA,USA,94705213-46-8915,Green,Marjorie,,309 63rd St.
#411,Oakland,CA,USA,94618
```

Commas separate the fields; a newline terminator separates the rows. There is no phone number for Marjorie Green. Because the `phone` column of the `authors` table has a default of "unknown," the rows in the loaded table look like this:

```
409-56-7008 Bennet David 415 658-9932 622 Pine St.
Berkeley CA USA 94705
213-46-8915 Green Marjorie unknown 309 63rd St. #411
Oakland CA USA 94618
```

Rules and triggers

`bcp`, to enable its maximum speed for loading data, does not fire rules and triggers.

To find any rows that violate rules and triggers, copy the data into the table and run queries or stored procedures that test the rule or trigger conditions.

3.22 How bcp Differs from Other Utilities

The `bcp` utility, which copies entire tables or portions of a single table, is distinct from the other utilities that move data from one place to another.

The following list names these other utilities and their commands, and describes how best to use them to move data.

Commands	Usage
<code>dump database</code> , <code>load database</code> , <code>dump transaction</code> , and <code>load transaction</code>	Use the SQL commands <code>dump database</code> , <code>load database</code> , <code>dump transaction</code> , and <code>load transaction</code> for backup purposes only. Unlike <code>bcp</code> , the <code>dump</code> commands create a physical image of the entire database. Use <code>load database</code> or <code>load transaction</code> to read data backed up with <code>dump database</code> or <code>dump transaction</code> . For information on using the SQL <code>dump</code> and <code>load</code> commands, see the <i>System Administration Guide</i> and the <i>Reference Manual</i> .
<code>insert</code> , <code>update</code> , and <code>delete</code>	Use the data modification commands <code>insert</code> , <code>update</code> , and <code>delete</code> , respectively, to add new rows to, change existing rows in, or remove rows from a table or view. <ul style="list-style-type: none"> • Use the <code>insert</code> command with a <code>select</code> statement to move data between tables. • Use the <code>select</code> statement with an <code>into</code> clause to create a new table, based on: <ul style="list-style-type: none"> ◦ the columns named in the <code>select</code> statement,

Commands

Usage

- the tables named in the `from` clause, and
- data in the rows named in the `where` clause.

For details on adding, changing, and deleting data, see `insert`, `update`, and `delete` in the *Reference Manual*.

4 Build Servers Using `dataserver`

`dataserver` is the executable form of the SAP ASE program.

SAP ASE does not use the `buildmaster` binary to build the master device. Instead, Sybase has incorporated the `buildmaster` functionality in the `dataserver` binary. This chapter discusses how to use `dataserver` to build your server.

i Note

The `dataserver` binary in Windows is called `sqlsrvr.exe`. If you are using the Windows platform, substitute all reference to `dataserver` in this chapter with `sqlsrvr`.

The `dataserver` command allows you to create master devices and databases with logical pages of size 2K, 4K, 8K, or 16K. Larger logical pages allow you to create larger rows, which can improve your performance because the SAP ASE server accesses more data each time it reads a page. For example, a 16K page can hold eight times the amount of data as a 2K page, an 8K page holds four times as much data as a 2K page, and so on, for all the sizes for logical pages.

The logical page size is a server-wide setting; you cannot have databases with varying size logical pages within the same server. All tables are appropriately sized so that the row size does not exceed the current page size of the server. That is, rows cannot span multiple pages.

Related Information

[dataserver \[page 53\]](#)

[sqlsrvr \[page 157\]](#)

4.1 Building a New Master Device

You can create a new master device using the `dataserver` utility.

The master device is built using the **build** mode in `dataserver`. After the master device is built, the server shuts down. You must then manually start the server in the **start** mode. After this you can start, stop, and restart the SAP ASE server whenever necessary without having to rebuild the master device

i Note

When you are building a master device you should allow an additional 8K for the config block.

The SAP ASE server uses:

- Logical page size – these are the pages that the database objects are built with. A databases and any of its related objects must use the same logical page size. Logical page sizes come in sizes of 2K, 4K, 8K, and 16K.
- Virtual page size – this is the physical page allocation at the disk level, and is always done in 2K pages. All disk I/O is done in multiples of virtual page size.
- Memory page size – the memory allocated and managed within the SAP ASE server. The memory page size is always in units of 2K pages.

To create a new master device with `dataserver`, use:

```
dataserver -d<device_name>
. . .
  -b [<master_device_size> [k|K|m|M|g|G]
    [-z <logical_page_size> [k|K]
-h
```

where:

`-d <device_name>` – is the full path name of the device for the `master` database. The master database device must be writable by the user who starts the SAP ASE server. The default `master` database device name is `d_master`.

`-b` – indicates that `dataserver` is in build mode and creating a new master device, and indicates the size of the master device. If you do not provide a unit specifier (`k`, `m`, `g`) for the size of the device, `dataserver` assumes a size in virtual pages. The size of a virtual page is always 2K. For example:

- `-b 51204` – specifies a device of 51,204 virtual pages (100.0078125MB).
- `-b 100M` – specifies a device of 100MB

`-z` – specifies the logical page size, which is always 2K, 4K, 8K, or 16K. This parameter is optional during the build phase and is ignored during the start mode. If you do not include the `-z` parameter during the build mode, the master device is built with 2K logical pages.

`-h` – prints the syntax for the `dataserver` command.

Related Information

[dataserver \[page 53\]](#)

4.1.1 Environments When Using `dataserver`

When you start an SAP ASE server with `dataserver`, it derives its running environment from different places.

The locations are:

- The configuration file you specify in `-c <configuration_file>`
- The default configuration file, `<servername.cfg>`, if you did not specify the `-c` parameter

- Default values if you did not specify either `-c <configuration_file>` or `<servername.cfg>`

4.1.2 Specifying Device and Logical Page Sizes When Building a New SAP ASE Server

Create a new SAP ASE server by issuing `dataserver` using the `-b` and `-z` options.

For example, to:

- Build a 100MB master device using the default logical page size (2K) and start the server:

```
dataserver -d /var/sybase/masterdb.dat -b100M -sMASTER2K
```

- Build a 100MB master device with a logical page size of size 4K:

```
dataserver -d /var/sybase/masterdb.dat -b100M -z4K -sMASTER4K
```

- Build a master device of 102,400 virtual pages of size 2K, create databases using a logical page size of 8K, and boot the server:

```
dataserver -d /var/sybase/masterdb.dat -b102400 -z8K -sMASTER8K
```

If the total requested space (102,400 x 2K = 200 MB) is insufficient to build all the required system databases using the specified logical page size, then an error message is reported, and the process fails.

Example: Example

The following is a sample output of `dataserver` building a 200MB device with a 2K logical page size, called `personnel2k`:

```
dataserver -d /var/sybase/personnel2k.dat -b200M -z2k -sPERSONNEL2K
```

`dataserver` uses a default configuration file if you do not specify one:

```
00:00000:00000:2001/04/16 10:24:31.73 kernel Warning: Using default file
'/var/sybase/PERSONNEL2K.cfg' since a configuration file was not specified.
Specify a configuration file name in the RUNSERVER file to avoid this
message.
```

To specify your own configuration file, use the `dataserver -c` parameter.

SAP ASE treats all installations as an upgrade, regardless of whether you have an existing version of SAP ASE or not. For this reason, you see the following output when running `dataserver`:

```
00:00000:00001:2001/04/16 10:24:32.63 server Database 'master' appears to
be at an older revision than the present installation; SQL Server will assess
it, and upgrade it as required.
00:00000:00001:2001/04/16 10:24:32.66 server Database 'master': beginning
upgrade step [ID 1]: Initialize disk and create empty allocation units
on master device.
00:00000:00001:2001/04/16 10:24:34.74 server Database 'master': beginning
```

```
upgrade step [ID 2]: Bootstrap basic system catalogs in database.
```

dataserver continues creating the master database, including all of its tables such as systypes, sysobjects and sysusages:

```
00:00000:00001:2001/04/16 10:24:35.21 server Database 'master': beginning
upgrade step [ID 3]: creating index (table systypes, index ncsystypes)
00:00000:00001:2001/04/16 10:24:35.36 server Database 'master': beginning
upgrade step [ID 4]: creating index (table sysobjects, index
ncsysobjects)
00:00000:00001:2001/04/16 10:24:35.44 server Database 'master': beginning
upgrade step [ID 20]: creating table (table sysusages)
[...]
```

When dataserver has created the master database, it creates the model database:

```
[...]
00:00000:00001:2001/04/16 10:24:43.14 server Database 'model' appears to
be at an older revision than the present installation; SQL Server will assess
it, and upgrade it as required.
00:00000:00001:2001/04/16 10:24:43.14 server Database 'model': beginning
upgrade step [ID 1]: Initialize disk and create empty allocation units
on master device.
00:00000:00001:2001/04/16 10:24:43.83 server Database 'model': beginning
upgrade step [ID 2]: Bootstrap basic system catalogs in database.
00:00000:00001:2001/04/16 10:24:43.89 server Database 'model': beginning
upgrade step [ID 3]: creating index (table systypes, index ncsystypes)
00:00000:00001:2001/04/16 10:24:43.91 server Database 'model': beginning
upgrade step [ID 4]: creating index (table sysobjects, index
ncsysobjects)
[...]
```

When dataserver has created the model database, it creates the tempdb and sybssystemdb databases:

```
[...]
00:00000:00001:2001/04/16 10:24:45.23 server CREATE DATABASE: allocating
1024 logical pages (2.0 megabytes) on disk 'master'.
00:00000:00001:2001/04/16 10:24:46.79 server Database sybssystemdb
successfully created.
[...]
```

dataserver is successful when the server changes the default sort order and shuts down:

```
[...]
00:00000:00001:2001/04/16 10:24:47.23 server Now loading SQL Server's new
default sort order and character set
[...]
00:00000:00001:2001/04/16 10:24:47.31 server Default Sort Order
successfully changed.
00:00000:00001:2001/04/16 10:24:47.37 server SQL Server shutdown after
verifying System Indexes.
00:00000:00001:2001/04/16 10:24:47.37 kernel ueshutdown: exiting
```

Example: Error Messages

If `dataserver` is unsuccessful, you cannot start the server on that master device, and you see the following error message:

```
00:00000:00001:2001/04/16 19:02:39.53 kernel Use license file
/var/sybase/SYSAM-1_0/licenses/license.dat.
00:00000:00001:2001/04/16 19:02:39.54 kernel The master device's
configuration area appears to be corrupt. The server needs this data to boot,
and so cannot continue. The server will shut down.
```

If you run `dataserver` with a user-specified configuration file that includes options that make it impossible to allocate a shared segment and start up a server, `dataserver` fails with an error message, and you cannot boot the server on that master device:

```
00:00000:00001:2001/04/16 19:04:01.11 kernel Use license file
/var/sybase/SYSAM-1_0/licenses/license.dat.
00:00000:00000:2001/02/09 19:04:01.25 kernel Using config area from primary
master device.
00:00000:00001:2001/04/16 19:04:01.36 server The value of the 'max
total_memory' parameter (33792) defined in the configuration file is not high
enough to set the other parameter values specified in the configuration file.
'max total_memory' should be greater than the logical memory '34343'.
```

4.1.3 Starting an Existing a SAP ASE Server

To start an existing SAP ASE server, issue `dataserver` without the `-b` and `-z` options:

Context

```
dataserver -d /sybase/masterdb.dat
```

4.1.4 Upgrading to a Server With Larger Page Sizes

SAP ASE earlier than version 12.5 used 2K logical page sizes. You cannot change an installation's page size by upgrading. That is, if your current SAP ASE uses 2K logical pages, you can upgrade only to an SAP ASE server that uses 2K logical pages.

However, you can migrate databases with 2K logical pages from earlier versions of SAP ASE.

Related Information

[Migrate Data Using `sybmigrate` \[page 350\]](#)

4.1.5 Viewing the Current Server Limits

To display information about the SAP ASE server's limits:

- Run `dbcc serverlimits`, which includes the size of your server's logical page size in its output. For example, enter:

```
dbcc serverlimits
```

- Search for the string "logical page size" in the error log.
- Run `select` using the `@@<maxpagesize>` global variable, which displays the server's logical page size:

```
select @@maxpage size
-----
      8192
```

5 View and Edit Server Entries Using dscp (UNIX)

The `dscp` utility program allows you to view and edit server entries in the interfaces file on UNIX platforms.

i Note

`dscp` is not available for Windows.

Related Information

[dscp \[page 93\]](#)

5.1 Starting and Using dscp

If you plan to add or modify entries, you must log in to the directory services, with the necessary privileges, before you start `dscp`.

To start `dscp`, enter:

```
$SYBASE/$SYBASE_OCS/bin/dscp
```

The `dscp` prompt, `>>`, appears.

To view the `dscp` help screen, enter one of the following commands:

```
help
```

```
h
```

```
?
```

The commands you can use are:

Command	Description
<code>open [<DSNAME>]</code>	Opens a session with the specified directory service or interfaces. To open a session with interfaces, specify "InterfacesDriver" as DSNAME.
<code>sess</code>	Lists all open sessions.
<code>[switch] <SESS></code>	Makes session number <SESS> the current session.

Command	Description
close [<SESS>]	Closes a session identified by the <SESS> number. If you do not specify <SESS>, closes the current session.
list [all]	Lists the server entries for the current session. To list the names of the entries, use the list command. To list the attributes for each entry, use the list all command.
read <SERVERNAME>	Prints the contents of server entry <SERVERNAME> to the screen.
add <SERVERNAME>	Adds server entry <SERVERNAME> in the current session. dscp prompts you for information about <SERVERNAME>. Press Return to accept the default value, which is shown in brackets [].
adtr <SERVERNAME>	Adds an attribute to the server entry <SERVERNAME> in the current session.
mod <SERVERNAME>	Modifies server entry <SERVERNAME> in the current session. dscp prompts you for information about <SERVERNAME>. Press Return to accept the default value, which is shown in brackets [].
del <SERVERNAME>	Deletes server entry <SERVERNAME> in the current session.
delete-all	Deletes all server entries in the current session.
copy <NAME1> to {<NAME2> <SESS> <SESS NAME2>}	Copies server entry <NAME1> in the current session to: <ul style="list-style-type: none"> • Server entry NAME2 in the current session • Session SESS • Server entry NAME2 in session SESS
copyall to <SESS>	Copies all server entries in the current session to session <SESS>.
config	Prints configuration information related to your Sybase environment to the screen.
exit, quit	Exits dscp.
help, ?, h	Displays the help screen.

5.1.1 Working with Server Entries

Use `dscp` to add or modify server entries.

i Note

When you add or modify a server entry, `dscp` automatically creates or modifies both master and query lines. The master line and the query line of an interfaces file entry contain identical information.

After you open a session, you can add or modify server entries associated with that session.

Each server entry is made up of a set of attributes. When you add or modify a server entry, `dscp` prompts you for information about each attribute.

Table 12: Server attributes

Attributes	Type of value	Default value and valid values	Can be edited when adding or modifying a server entry	
			Adding	Modifying
Server Object Version	Integer	110	No	No
Server Name	Character string	N/A	N/A	No
Server Service	Character string	SQL SERVER	Yes	No
Server Status	Integer	4 Valid values are: 1. Active 2. Stopped 3. Failed 4. Unknown	No	No
Transport Type	Character string	tcp. Valid values are: decnet, spx, tcp, tli, spx, tli tcp	Yes	Yes
<div style="border-left: 2px solid #0070C0; padding-left: 10px; margin-left: 100px;"> <p>i Note</p> <p>SAP ASE does not support the TLI interface in threaded mode.</p> </div>				
Transport Address	Character string	None. Valid values are character strings recognized by the specified transport type	Yes	Yes
Security Mechanism	Character string	None	Yes	Yes
<div style="border-left: 2px solid #0070C0; padding-left: 10px; margin-left: 100px;"> <p>i Note</p> <p>You can add up to 20 security mechanism strings for each server entry</p> </div> <div style="margin-left: 100px;"> <p>Valid values are character strings associated with object identifiers defined in the user's <code>objectid.dat</code>.</p> </div>				

Related Information

[Adding a Server Entry \[page 258\]](#)

[Modifying or Deleting a Server Entry \[page 259\]](#)

[Exiting dscp \[page 262\]](#)

5.1.1.1 Adding and Modifying Server Entries

After you open a session, you can add or modify server entries associated with that session.

5.1.1.1.1 Adding a Server Entry

After you open a session, you can add server entries associated with that session.

Procedure

1. Enter:

```
add <servername>
```

You are now in add mode. You can continue to add server entries, but you cannot execute any other `dscp` commands until you exit this mode. While in add mode, `dscp` prompts you for information about `<servername>`.

2. Either:
 - o Enter a value for each attribute, or
 - o Press *Return* to accept the default value, which is shown in brackets []

For example, `dscp` prompts for this information when you enter:

```
add myserver
Service: [SQL Server]
Transport Type: [tcp] tcp
Transport Address: victory 8001
Security Mechanism []:
```

A server entry can have up to 20 transport type/address combinations associated with it.

3. When you are done adding a server enter, exit add mode:

```
#done
```

Related Information

[Working with Server Entries \[page 256\]](#)

[Copy Server Entries \[page 260\]](#)

[List and View Contents of Server Entries \[page 261\]](#)

[Delete Server Entries \[page 262\]](#)

5.1.1.1.2 Modifying or Deleting a Server Entry

After you open a session, you can modify or delete server entries associated with that session.

Context

You cannot use `dscp` to modify the Version, Service, and Status entries in the `interfaces` file.

Procedure

1. Enter:

```
mod <servername>
```

You are now in modify mode. You can continue to modify server entries, but you cannot execute any other `dscp` commands until you exit this mode. In modify mode, `dscp` prompts you for information about `<servername>`.

2. Either:

- Enter a value for each attribute, or
- Press *Return* to accept the default value, which is shown in brackets []

For example, `dscp` prompts for the following information when you enter:

```
mod myserver
Version: [1]
Service: [SQL Server] Open Server
Status: [4]
Address:
Transport Type: [tcp]
Transport Address: [victory 1824] victory 1826
Transport Type: [tcp]
Transport Address: [victory 1828]
Transport Type: []
Security Mechanism []:
```

- a. To delete an address:

```
#del
```

3. When you are done modifying a server enter, exit modify mode:

```
#done
```

Related Information

[Working with Server Entries \[page 256\]](#)

[Copy Server Entries \[page 260\]](#)

[List and View Contents of Server Entries \[page 261\]](#)

[Delete Server Entries \[page 262\]](#)

5.1.1.2 Copy Server Entries

`dscp` allows you to copy server entries within a session and between two sessions.

When you are copying a server entry, you can:

Options	Descriptions
Create server entry to a new name in the current session	<p>A server entry to a new name in the current session by entering:</p> <pre>copy <name1> to <name2></pre> <p>For example, <code>dscp</code> creates a new entry, "my_server," that is identical to "myserver" when you enter:</p> <pre>copy myserver to my_server</pre> <p>You can then modify the new entry and leave the original intact.</p>
Copy a server entry without changing the name	<p>Copy a server entry without changing the name. Enter:</p> <pre>copy <name1> to <sess></pre> <p>For example, <code>dscp</code> copies the "myserver" entry in the current session to session 2 when you enter:</p> <pre>copy myserver to 2</pre>
Copy a server entry and rename it.	<p>Enter:</p> <pre>copy <name1> to <sess name2></pre> <p>For example, <code>dscp</code> copies the "myserver" entry in the current session to session 2 and renames it "my_server" when you enter:</p> <pre>copy myserver to 2 my_server</pre>
Copy all entries in the current session to a different session.	<p>Enter:</p> <pre>copyall <sess></pre>

Options	Descriptions
	For example, <code>dscp</code> copies all entries in the current session to session 2 when you enter:
	<pre>copyall 2</pre>

Related Information

[Adding a Server Entry \[page 258\]](#)

[Modifying or Deleting a Server Entry \[page 259\]](#)

[Exiting dscp \[page 262\]](#)

5.1.1.3 List and View Contents of Server Entries

You can list names and attributes associated with a session.

Option	Description
List names of server entries	Enter: <pre>list</pre>
List the attributes of server entries	Enter: <pre>list all</pre>
View the contents of a server entry	Enter: <pre>read <servername></pre> For example: <pre>read myserver DIT base for object: interfaces Distinguish name: myserver Server Version: 1 Server Name: myserver Server Service: SQL Server Server Status: 4 (Unknown) Server Address: Transport Type: tcp Transport Addr: victory 1824 Transport Type: tcp Transport Addr: victory 1828</pre>

Related Information

[Adding a Server Entry \[page 258\]](#)

[Modifying or Deleting a Server Entry \[page 259\]](#)

[Exiting dscp \[page 262\]](#)

5.1.1.4 Delete Server Entries

You can delete one entry or all entries associated with a session.

Option	Description
Delete entries associated with a session	Enter: <pre>del <servername></pre> <p>For example, <code>dscp</code> deletes the entry for “myserver” when you enter:</p> <pre>del myserver</pre>
Delete all entries associated with a session	Enter: <pre>delete-all</pre>

Related Information

[Adding a Server Entry \[page 258\]](#)

[Modifying or Deleting a Server Entry \[page 259\]](#)

[Exiting dscp \[page 262\]](#)

5.2 Exiting dscp

Enter this command to exit `dscp`.

Procedure

To exit `dscp`, enter either of the following:

- o `exit`

- o `quit`

Related Information

[Working with Server Entries \[page 256\]](#)

[Copy Server Entries \[page 260\]](#)

[List and View Contents of Server Entries \[page 261\]](#)

[Delete Server Entries \[page 262\]](#)

6 View and Edit Server Entries using dsedit

dsedit is a graphical utility that lets you view and edit server entries in the interfaces file (sql.ini in Windows).

i Note

(UNIX) If your system does not have X-Windows, use dscp to configure server entries in the interfaces file.

Related Information

[View and Edit Server Entries Using dscp \(UNIX\) \[page 255\]](#)

[dsedit \[page 95\]](#)

6.1 Add, View, and Edit Server Entries

Once you are in an open session, you can add, modify, rename, and delete server entries associated with that session, as well as copy server entries within a session and between sessions.

Each server entry is made up of a set of attributes.

Table 13: Server attributes

Attribute name	Type of value	Description	Default value
Server Version	Integer	Version level of the server object definition. Sybase provides this attribute to identify future changes to the object definition.	150
Server Name	Character string	Server name.	N/A
Server Service	Character string	A description of the service provided by the server. This value can be any meaningful description.	The SAP ASE server
Server Status	Integer	The operating status of the server. Values are: <ul style="list-style-type: none">• Active• Stopped• Failed• Unknown	4

Attribute name	Type of value	Description	Default value
Security Mechanism	Character string	Object identifier strings (OID) that specify the security mechanisms supported by the server. This attribute is optional. If it is omitted, Open Server allows clients to connect with any security mechanism for which Open Server has a corresponding security driver.	N/A
Server Address	Character string	<p>One or more addresses for the server.</p> <p>The format of the address varies by protocol, and some protocols allow more than one format. The options are:</p> <ul style="list-style-type: none"> • TCP/IP – two formats: <ul style="list-style-type: none"> ◦ <code><computer name>,<port number></code> ◦ <code><ip-address>,<portnumber></code> • Named Pipe – <code><pipe name></code>: “\pipe” is a required prefix to all pipe names. Server pipes can be only local. <ul style="list-style-type: none"> ◦ Local – <code>\pipe\sql\query</code> ◦ Remote – <code>\\computer_name\pipe\sql\query</code> • IPX/SPX – three formats: <ul style="list-style-type: none"> ◦ <code><server name></code> ◦ <code><net number>,<node number>,< socket number></code> ◦ <code><server name>,<socket number></code> • DECnet – four formats: <ul style="list-style-type: none"> ◦ <code><area number>.<node number>,<object name></code> ◦ <code><area number>.<node number>,<object number></code> ◦ <code><node name>,<object name></code> ◦ <code><node name>,<object number></code> 	N/A

6.2 Using dsedit in UNIX

The `dsedit` utility allows you to view and edit server entries in the interfaces file using a GUI.

The server entries associated with the session appear in the Server box. Click a server entry to select it.

i Note

If your system does not have X-Windows, use `dscp` utility to configure server entries in the interfaces file.

Related Information

[dsedit \[page 95\]](#)

6.2.1 Starting dsedit in UNIX

Before starting `dsedit`, verify that you have write permission on the interfaces file.

Prerequisites

If you are running `dsedit` from a remote machine, verify that the `DISPLAY` environment variable is set so the `dsedit` screens display on your machine instead of on the remote machine by logging in to the remote machine and entering:

```
setenv DISPLAY <your_machine_name>:0.0
```

Procedure

Enter:

```
`${SYBASE}/bin/dsedit
```

The Select a Directory Service window appears, letting you open editing sessions for the interfaces file. The full path name of the default interfaces file is shown in the Interfaces File to Edit box, and the full path name of the configuration file is shown below it.

6.2.2 Open an Editing Session in UNIX

You can edit both the default interfaces file as well as other interfaces files to edit.

Procedure

1. In `dsedit`, select *Sybase Interfaces File*.
2. To open:
 - The default interfaces file for editing, click *OK*.
 - A file other than the default interfaces file, edit the displayed file name, then click *OK*.

Results

The Directory Service Session window appears.

6.2.3 Modify Server Entries in UNIX

The server entries associated with the session appear in the Server box. Click a server entry to select it.

Click [Close Session](#) to apply your edits to the interfaces file. Clicking this button also closes the interfaces session window.

Related Information

[Open an Editing Session in Windows \[page 271\]](#)

6.2.3.1 Adding a New Server Entry in UNIX

Use `dsedit` to add a server entry.

Procedure

1. Click [Add new server entry](#).
2. Specify the name and network addresses for a new server entry.

6.2.3.2 Viewing or Modifying a Server Entry in UNIX

Use `dsedit` to modify a server entry.

Procedure

1. Click [Modify server entry](#).
2. Modify the attributes.

6.2.3.3 Add or Edit Network Transport Addresses

You can view, edit, or create the transport addresses at which a server accepts client connections in the Network Transport Editor window.

This window displays the name of the server entry for the address and allows you to configure:

- Transport type – specifies the protocol and interface for the address.
- Address information – different address components are required depending on the transport type.

6.2.3.3.1 TCP/IP Addresses

The address information for a TCP/IP entry consists of a host name (or IP address) and a port number (entered as a decimal number).

There are two `interfaces` file entry formats, TLI and TCP. SAP ASE does not support the TLI interface in threaded mode. SAP ASE does not support the TLI interface in threaded mode.

i Note

End of life for TLI interface is scheduled for January of 2018. If you are planning to develop new applications with SAP ASE, avoid using the TLI interface.

For more information, see *Configuration Guide for UNIX > Set Up Communications Across the Network > interfaces File Format*.

6.2.3.3.2 SPX/IPX Addresses

SPX/IPX addresses allow Adaptive Server to listen for connections from client applications running on a Novell network.

To indicate an SPX/IPX address, choose `tlipx` or `spx` from the Transport Type menu.

Address Information	Description
Host address	An eight digit hexadecimal value representing the IP address of the computer on which the server runs. Each component of the dot-separated decimal IP address format maps to one byte in the hex address format. For example, if your host's IP address is 128.15.15.14, enter "800F0F0E" as the SPX/IPX host address value.
Port number	The port number, expressed as a four-digit hexadecimal number.
Endpoint	The path for the device file that points to the SPX device driver. Defaults to <code>/dev/mspx</code> on Solaris and <code>/dev/nspx</code> on any other platform. If necessary, adjust the path so that it is correct for the machine on which the server runs. The default path is based on the platform on which you are running <code>dsedit</code> .

6.2.4 Copying a Server Entry to Another Interfaces File in UNIX

Use `dsedit` to copy a server entry into another interfaces file.

Procedure

1. Select the entries to copy.
 - Click once to copy a single entry.
 - Copy a range of consecutive entries by clicking the first entry in the range, then pressing and holding Shift key, and clicking the last entry in the range.
 - Select multiple, nonconsecutive entries by pressing and holding down the Ctrl key while you click each entry.
2. Click [Copy server entry](#).
3. Select the Sybase interfaces file from the list.
4. Edit the file name, then click [OK](#).

6.2.5 Copying Server Entries Within the Current Session

Use `dsedit` to copy server entries within the current session.

Procedure

1. Select one or more servers to copy. To select multiple entries, use the Shift key.
2. Click [Copy](#) from below the menu bar, or choose [▶ Edit > Copy ▶](#).
3. Click [Paste](#) from below the menu bar, or choose [▶ Edit > Paste ▶](#). `dsedit` appends the copied server entries with a version number of `<_n>`. To rename copied server entries, select [▶ Server Object > Rename ▶](#).

Related Information

[Renaming a Server Entry \[page 274\]](#)

6.2.6 Copying Server Entries Between Sessions

Use `dsedit` to copy server entries between sessions.

Procedure

1. Open a session with the directory service or `sql.ini` file you want the entries copied to.

To open a session, choose **File > Open Directory Service**.

2. Select one or more servers to copy. To select multiple entries, use the Shift key.
3. Click **Copy** from below the menu bar, or choose **Edit > Copy**.

To cut the server entries, click **Cut** below the menu bar, or choose **Edit > Cut**.

4. Activate the session where you want to paste the server entries.
5. Click **Paste** below the menu bar, or choose **Edit > Paste**.

Results

You can rename the copied server entries using **Server Object > Rename**.

Related Information

[Switching Between Sessions in Windows \[page 273\]](#)

[Opening Additional Sessions in Windows \[page 272\]](#)

[Renaming a Server Entry \[page 274\]](#)

6.3 Using dsedit in Windows

The `dsedit` utility allows you to view and edit server entries in the interfaces file using a GUI. In Windows, `dsedit` creates and modifies network connection information in the interfaces file.

The server entries associated with the session appear in the Server box. Click a server entry to select it.

Related Information

[dsedit \[page 95\]](#)

6.3.1 Starting dsedit in Windows

Start `dsedit` from the command prompt, the Windows Explorer, or the Sybase for Windows program group.

Method	Description
Command prompt	<p>Enter:</p> <pre>dsedit</pre> <p>Specify these command-line arguments:</p> <ul style="list-style-type: none">• <code>-d<dsname></code> – specifies which directory service to connect to. <code><dsname></code> is the local name of the directory service, as listed in the <code>libtcl.cfg</code> file. If you do not specify <code>-d<dsname></code>, <code>dsedit</code> presents a list of directory service options in the first dialog box.• <code>-l<path></code> – specifies the path to the <code>libtcl.cfg</code> file, if other than <code>SYBASE_home\INI</code>. Use this only if you want to use a <code>libtcl.cfg</code> file other than the one located in <code>SYBASE_home\INI</code>.
Windows Explorer	Double-click <code>DSEEDIT.exe</code> in the <code>%SYBASE%\bin\</code> directory.
Windows Start menu	Choose ► <i>Start</i> ► <i>Sybase for Windows</i> ► <i>dsedit</i> ►.

6.3.2 Open an Editing Session in Windows

The Select Directory Service dialog box allows you to open a session with a directory service.

Open a session with:

- Any directory service that has a driver listed in the `libtcl.cfg` file
- The `sql.ini` file

6.3.2.1 Opening a Session in Windows

There are two methods to open a session in Windows.

Procedure

Choose a method:

- Double-click the local name of the directory service you want to connect to, as listed in the DS Name box
- Click the local name of the directory service you want to connect to, as listed in the DS Name box, and click *OK*.
`dsedit` uses the SYBASE environment variable to locate the `libtcl.cfg` file. If the SYBASE environment variable is not set correctly, `dsedit` cannot locate the `libtcl.cfg` file.

The session number and local name of the directory service appear in the header bar.

6.3.2.2 Opening Additional Sessions in Windows

`dsedit` allows you to have multiple sessions open at one time.

Procedure

1. Select **File > Open Directory Service**.
2. Double-click the local name of the directory service to which to connect. Alternatively, select the directory service and click *OK*.

Results

Opening multiple sessions allows you to copy entries between directory services.

6.3.2.3 Switching Between Sessions in Windows

If you have multiple sessions open simultaneously, you must activate a session before you can work in it.

Procedure

Perform either:

- Clicking in the session window
- Choosing the session from the Windows menu

The `dsedit` title bar shows which session is active.

6.3.3 Modify Server Entries in Windows

The server entries associated with the session appear in the Server box. Click a server entry to select it.

6.3.3.1 Adding a Server Entry

Use `dsedit` to add a server entry.

Procedure

1. Choose ► *Server Object* ► *Add* ▾.
2. Either:
 - (UNIX) Specify the name and network addresses for a new server entry.
 - (Windows) Enter a server name, then click *OK*.

The server entry appears in the Server box. To specify an address for the server, you must modify the entry.

6.3.3.2 Modifying a Server Attribute

Use `dsedit` to modify a server entry.

Context

Modify any attribute of a server entry.

Procedure

1. Select a server.
2. (Windows) Choose ► *Server Object* ► *Modify Attribute* ▾.
{UNIX) Click *Modify server entry*.
3. Select the attribute to modify. A dialog box appears that shows the current value of the attribute.
4. Enter or select the new attribute value, then click *OK*.

6.3.3.3 Renaming a Server Entry

Use `dsedit` to rename a server entry.

Procedure

1. Select a server.
2. Choose ► *Server Object* ► *Rename* ▾.
3. Enter a new server name, then click *OK*.

6.3.3.4 Deleting a Server Entry

Use `dsedit` to delete a server entry.

Procedure

1. Select a server.
2. Choose ► *Server Object* ► *Delete* ►.

6.3.4 Copying Server Entries Within the Current Session in Windows

Use `dsedit` to copy server entries within the current session.

Procedure

1. Click one or more server entries in the Server box. Use the Shift key to select multiple entries.
2. Click *Copy* below the menu bar, or choose ► *Edit* ► *Copy* ►.
3. Click *Paste* below the menu bar, or choose ► *Edit* ► *Paste* ►. `dsedit` appends the copied server entries with a version number of `_<n>`. You can rename the copied server entries using ► *Server Object* ► *Rename* ►.

Related Information

[Renaming a Server Entry \[page 274\]](#)

6.3.5 Copying Server Entries Between Sessions in Windows

Use `dsedit` to copy server entries between sessions.

Procedure

1. Open a session with the directory service or `sql.ini` file that you want the entries copied to.
2. To open a session, choose **File > Open Directory Service**.
3. Click one or more server entries in the Server box of the session that you want the entries copied from. Use the Shift key to select multiple entries.
4. To copy the server entries, click **Copy** below the menu bar, or choose **Edit > Copy**.
To cut the server entries, click **Cut** below the menu bar, or choose **Edit > Cut**.
5. Activate the session where you want to paste the server entries.
6. Click **Paste** below the menu bar, or choose **Edit > Paste**.

Results

You can rename the copied server entries using the `Rename` command in the Server Object menu.

Related Information

[Opening Additional Sessions in Windows \[page 272\]](#)

[Renaming a Server Entry \[page 274\]](#)

6.4 Troubleshooting dsedit

Identify and correct common `dsedit` problems.

Problem	Solution
The <code>dsedit</code> utility does not start	Check for the following: <ul style="list-style-type: none">• The SYBASE environment variable is not set or points to the wrong directory.• (UNIX) X-Windows is not configured correctly. If you are running <code>dsedit</code> on a remote host, make sure that X-Windows clients on the remote host can connect to the X-

Problem**Solution**

Windows server on your own machine. See your X-Windows documentation for more troubleshooting information. If X-Windows is not available, use `dscp` instead of `dsedit`.

**Error message:
“Unable to open
X display”**

(UNIX) `dsedit` might not work if the display machine is set up to reject X-Windows connections from remote hosts. If this is the problem, you see a message similar to the following:

```
Unable to open X display. Check the value of your
$DISPLAY variable. If it is set correctly, use the
'xhost +' command on the display machine to authorize
use of the X display. If no X display is available, run
dscp instead of dsedit.
```

This error may be caused by either of the following situations:

- The value for the DISPLAY environment variable is not entered correctly or is not set.
Solution : Enter the DISPLAY environment variable correctly.
- You are not authorized to open windows on the machine to which DISPLAY refers.
Solution : Run the command `\xhost +` on the display machine.

**Cannot add,
modify, or delete
server entries**

Check for permissions problems with the interfaces file. To edit interfaces entries, you must have write permission on both the interfaces file and the Sybase installation directory.

7 Using Interactive SQL from the Command Line

`isql` is a command line interactive SQL parser to the SAP ASE server.

If you are running Open Client version 11.1 or later and are using an external SAP ASE-related configuration file, add the following in your configuration file to enable `isql`:

```
[isql]
```

Related Information

[isql \[page 104\]](#)

7.1 Starting isql

Perform these steps to start `isql`.

Procedure

1. Enter this command at the operating-system prompt:

```
isql
```

2. When the prompt appears, enter your password.

The password does not appear on the screen as you type.

The `isql` prompt appears:

```
1>
```

You can now issue Transact-SQL commands.

7.2 Stopping isql

To stop `isql`, enter one of these commands on a line by itself.

Procedure

Enter:

- `quit`
- `exit`

7.3 Using Transact-SQL in isql

`isql` sends Transact-SQL commands to the SAP ASE server, formatting the results and printing them to standard output.

There is no maximum size for an `isql` statement. For more information about using Transact-SQL, see the *Transact-SQL Users Guide*.

i Note

To use Transact-SQL directly from the operating system with the `isql` utility program, you must have an account, or login, on the SAP ASE server.

To execute a Transact-SQL command, type the default command terminator "`go`" on a new line.

For example:

```
isql
Password:
1> use pubs2
2> go
1> select *
2> from authors
3> where city = "Oakland"
4> go
```

7.3.1 Formatting isql Output

The width for `isql` output is adjusted according to the character-set expansion or the character width, and displays a output column of the maximum possible bytes.

For example, for the UTF8 character set, each character may use at most 4 bytes, so the output column width is the character number multiplied by 4. However, the output column width can not be larger than the column defined value, and the column width is calculated using this formula:

`Min(<character_number> X <max_character_width>, <column_defined_width>)`

For example, if a column `col1` is defined as `varchar(10)`, then `left(col1, 2)` returns a width of eight, or four bytes per character. A value of `left(col1, 5)` returns a width of 10, and cannot be larger than the defined length, even though, according to the formula, $5 \times 4 = 20$.

The options that change the format of `isql` output are:

- `-h <headers>` – the number of rows to print between column headings. The default is 1.
- `-s <colseparator>` – changes the column separator character. The default is single space.
- `-w <columnwidth>` – changes the line width. The default is 80 characters.
- `-e` – Includes each command issued to `isql` in the output
- `-n` – Removes numbering and prompt symbols

In this example, the query's results are placed in a file called `output`:

```
isql -User_name -Ppassword -Sserver -e -n -o output
use pubs2
go
select *
from authors
where city = "Oakland"
go
quit
```

To view the contents of `output`, enter:

- (Windows) `type output`
- (UNIX) `cat output`

```
select *
from authors
where city = "Oakland"
au_id      au_lname  au_fname  phone      address
city      state  country  postalcode
-----
213-46-8915 Green      Marjorie  415 986-7020 309 63rd St. #411
Oakland   CA      USA      94618
274-80-9391 Straight   Dick      415 834-2919 5420 College Av.
Oakland   CA      USA      94609
724-08-9931 Stringer  Dirk      415 843-2991 5420 Telegraph Av.
Oakland   CA      USA      94609
724-80-9391 MacFeather Stearns  415 354-7128 44 Upland Hts.
Oakland   CA      USA      94612
756-30-7391 Karsen    Livia     415 534-9219 5720 McAuley St.
Oakland   CA      USA      94609
```


i Note

The `output` file does not include the command terminator.

7.3.2 Correcting isql Input

You can correct input when you make an error when typing a Transact-SQL command.

You can:

- Press Ctrl-c or type the word “**reset**” on a line by itself – this clears the query buffer and returns the `isql` prompt.
- Type the name of your text editor on a line by itself – this opens a text file where you can edit the query. When you write and save the file, you are returned to `isql` and the corrected query appears. Type “**go**” to execute it.

7.3.3 set Options that Affect Output

A number of `set` options affect Transact-SQL output.

Option	Description
<code>char_convert</code>	Turns character-set conversion off and on between the SAP ASE server and a client; also starts a conversion between the server character set and a different client character set. The default is off.
<code>fipsflagger</code>	Warns when any Transact-SQL extensions to entry-level SQL92 are used. This option does not disable the SQL extensions. Processing completes when you issue the non-ANSI SQL command. The default is off.
<code>flushmessage</code>	Sends messages as they are generated. The default is off.
<code>language</code>	Sets the language for system messages. The default is <code>us_english</code> .
<code>nocount</code>	Turns off report of number of rows affected. The default is off.
<code>noexec</code>	Compiles each query but does not execute it; often used with <code>showplan</code> . The default is off.
<code>parseonly</code>	Checks the syntax of queries and returns error messages without compiling or executing the queries. The default is off.
<code>showplan</code>	Generates a description of the processing plan for a query; does not print results when used inside a stored procedure or trigger. The default is off.
<code>statistics io,</code> <code>statistics time</code>	Displays performance statistics after each execution. The default is off.
<code>statistics</code> <code>subquerycache</code>	Displays the number of cache hits, misses, and rows in the subquery cache for each subquery. The default is off.

Option	Description
<code>textsize</code>	Controls the number of bytes of <code>text</code> or <code>image</code> data returned. The default is 32K.

For more information, see `set` in the *Reference Manual*

7.4 Changing the Command Terminator

If you include the command terminator argument (`-c`), you can choose your own terminator symbol; `go` is the default value for this option. Always enter the command terminator without blanks or tabs in front of it.

Context

For example, to use a period as the command terminator, invoke `isql`:

```
isql -c.
```

A sample `isql` session with this command terminator looks like:

```
1> select name from sysusers
2> .
name
-----
sandy
kim
leslie
(3 rows affected)
```

Using the `isql` command terminator option with scripts requires advance planning:

- When the SAP ASE server supplies scripts, such as `installmaster`, use “`go`”. Do not change the command terminator for any session that uses these scripts.
- Your own scripts may already have “`go`” in them. Remember to update your scripts to include the terminator you plan to use.

7.5 Performance Statistics Interaction with Command Terminator Values

`isql` provides a performance statistics option (`-p`).

For example, this syntax returns the following statistics:

```
isql -p
1> select * from sysobjects
2> go
```

```
Execution Time (ms.): 1000   Clock Time (ms.): 1000
1 xact:
```

This means that a single transaction took 100 milliseconds. The clock time value reflects the entire transaction, which starts when Client-Library™ builds the query and ends when Client-Library returns the information from the SAP ASE server.

You can gather performance statistics based on the execution of one or more transactions. To gather statistics on more than one transaction, specify a number after the command terminator.

For example, the following command instructs the SAP ASE server to execute three `select *` transactions and report the performance statistics:

```
isql -p
1> select * from sysobjects
2> go 3
Execution Time (ms.): 1000   Clock Time (ms.): 1000
Execution Time (ms.): 1000   Clock Time (ms.): 2000
Execution Time (ms.): 1000   Clock Time (ms.): 1000
Execution Time (ms.): 1000   Clock Time (ms.): 4000
3xact:
```

7.6 Input and Output Files

You can specify input and output files on the command line with the `-i` and `-o` options.

`isql` does not provide formatting options for the output. However, you can use the `-n` option to eliminate the `isql` prompts and other tools to reformat the output.

If you use the `-e` option, `isql` echoes the input to output. The resulting output file contains both the queries and their results.

7.6.1 UNIX command line redirection

The UNIX redirection symbols, “<” and “>”, provide a similar mechanism to the `-i` and `-o` options.

For example:

```
isql -Usa < input > output
```

You can direct `isql` to take input from the terminal, as shown in this example:

```
isql -Usa -P<password> -S<server_name> << EOF > <output> use pubs2
go
select * from table
go
EOF
```

“<<EOF” instructs `isql` to take input from the terminal up to the string “EOF.” You can replace “EOF” with any character string. Similarly, the following example signals the end of input with Ctrl-d:

```
isql -Usa << > output
```

8 Using Interactive SQL in Graphics Mode

Interactive SQL is the GUI-based `isql` utility, and allows you to execute SQL statements, build scripts, and display database data to the server..

You can use Interactive SQL to:

- Browse the information in a database.
- Test SQL statements that you plan to include in an application.
- Load data into a database and carrying out administrative tasks.

In addition, Interactive SQL can run command files or script files. For example, you can build repeatable scripts to run against a database and then use Interactive SQL to execute these scripts as batches.

8.1 Starting Interactive SQL

The menu item Open Interactive SQL opens a connection to a server. However, when you select the menu item for a server, Interactive SQL opens a connection to the default database for that server. When you select a specific database from the Open Interactive SQL menu, Interactive SQL opens to the selected database.

Context

How you start Interactive SQL from the command line depends on your operating system.

If you start Interactive SQL independently, the Connect dialog appears, which lets you connect to a database just as you would in SQL Central.

- (UNIX) You need not install Interactive SQL under `$SYBASE`, as `$SYBASE` does not even need to exist for them to start. Instead, Interactive SQL is installed under `$SYBROOT`, an environment variable set by the installer. Go to `$SYBROOT` and enter:

```
dbisql
```

(Windows) Change to the `%SYBROOT` directory and enter:

```
dbisql.bat
```

- In the Connection dialog, enter the information to connect to a database in the Connect dialog box and click *OK*.

To open a new Interactive SQL window:

Procedure

1. Choose **Window > New Window**. The Connect dialog appears.
2. In the Connect dialog, enter connection options, and click **OK** to connect.

The connection information (including the database name, your user ID, and the database server) appears on the title bar above the SQL Statements pane.

You can also connect to or disconnect from a database with the Connect and Disconnect commands in the SQL menu, or by executing a `connect` or `disconnect` statement in the SQL Statements pane.

8.2 The Main Interactive SQL Window

The Interactive SQL window includes four panes.

The window title displays the connection name. For SAP ASE, the connection name is either the server name (determined by the server's interfaces file entry) or the host name and port number the user enters at the time of connection. The panes are:

Panes	Description
SQL Statement	Provides a place for you to type SQL statements.
Results	Displays the results of commands that you execute. For example, if you use SQL statements to search for specific data in the database, the Results tab in this pane displays the columns and rows that match the search criteria. If the information exceeds the size of the pane, scroll bars automatically appear. You can edit the result set on the Results tab.
Messages	Displays messages from the database server.
Plan	Displays the query optimizer's execution plan for a SQL statement.

Related Information

[Plan Dialog Tab \[page 287\]](#)

8.2.1 Plan Dialog Tab

The Plan tab displays a GUI representation of an execution engine's plan for the currently running SQL text, and helps you understand the performance and statistic characteristics of the currently running query.

i Note

The Plan tab only appears if you connect to SAP ASE version 15.0 and later.

The top half of the Plan tab shows the logical flow of the operators used in the plan in a tree-based, hierarchal structure, with each operator a separate node of the tree. The cost of each operator is based on the cost model used by the query processor. The cost for each operator node in the tree is appraised relative to other nodes, which makes it easier to identify operators based on their costs.

Each node includes tooltip text (text that appears when you move your mouse over the node) that provides details about each operator, so you do not have to select the nodes to compare details between operators.

Plan Tab Information	Description
Details	Shows the details of the operator statistics as: <ul style="list-style-type: none">• Node Statistics table – shown for all the operators, and includes statistics like row count, logical I/O, and physical I/O.• Subtree Statistics table – the aggregate sum of all the operators below, and are shown for the non-leaf operators, and include statistics on row count, logical I/O, and physical I/O.
XML	Shows the result set as XML output.
Text	Shows the text version of the query plan (the same as the output of <code>showplan</code>).
Advanced	Includes: <ul style="list-style-type: none">• Abstract query plan – shows the abstract query plan used by the query.• Resource utilization – describes the resources used by the plan, including number of threads and the auxiliary session descriptors (SDEs; every table scan requires one session descriptor to track the scan).• Cost – lists costs associated with the plan, including logical I/O, Physical I/O, and CPU usage.• Optimizer Metrics – lists the query-plan statistics, including query run time, run time for the first plan, number of plans evaluated, number of plans that were valid, and amount of procedure cache used.• Optimizer Statistics – lists the last time you ran <code>update statistics</code> on the table, any missing histogram steps, and the density of the steps.

8.3 The Interactive SQL Toolbar

The Interactive SQL toolbar appears at the top of the Interactive SQL window.

Use the buttons on this toolbar to:

- Recall the executed SQL statement immediately before your current position in the history list.
- View a list of up to 50 previously executed SQL statements.
- Recall the executed SQL statement immediately after your current position in the history list.
- Execute the SQL statement that appears in the SQL Statements pane.
- Interrupt the execution of the current SQL statement.

8.4 Open Multiple Windows

You can open multiple Interactive SQL windows. Each window corresponds to a separate connection.

You can connect simultaneously to two (or more) databases on different servers, or you can open concurrent connections to a single database.

8.5 Keyboard Shortcuts

Interactive SQL provides keyboard shortcuts.

Function	Description
Alt-F4	Exits Interactive SQL.
Alt-LEFT ARROW	Displays the previous SQL statement in the history list.
Alt-RIGHT ARROW	Displays the next SQL statement in the history list.
Ctrl-C	Copies the selected rows and column headings to the clipboard.
Ctrl-End	Moves to the bottom of the current pane.
Ctrl-F6	Cycles through the open Interactive SQL windows.
Ctrl-H	Displays the history of your executed SQL statements during the current session.
Ctrl-Home	Moves to the top of the current pane.
Ctrl-N	Clears the contents of the Interactive SQL window.
Ctrl-Q	Displays the Query Editor, which helps you build SQL queries. When you have finished building your query, click OK to export it back into the SQL Statements pane.
Ctrl-S	Saves the contents of the SQL Statements pane.

Function	Description
Shift-F5	Refreshes the plan without executing the statement in the SQL Statements pane. This allows you to see the plan for a statement without altering table data.
Esc	Clears the SQL Statements pane.
F2	Allows you to edit the selected row in the result set. You can use the Tab key to move from column to column within the row.
F5	Executes all text in the SQL Statements pane. You can also perform this operation by clicking the Execute SQL Statement button on the toolbar.
F7	Displays the Lookup Table Name dialog. In this dialog, you can find and select a table and then press Enter to insert the table name into the SQL Statements pane at the cursor position. Or, with a table selected in the list, press F7 again to display the columns in that table. You can then select a column and press Enter to insert the column name into the SQL Statements pane at the cursor position.
F8	Displays the Lookup Procedure Name dialog. In this dialog, you can find and select a procedure, then press Enter to insert the procedure name into the SQL Statements pane at the cursor position.
F9	Executes the selected text in the SQL Statements pane. If no text is selected, all of the statements are executed.
Page Down	Moves down in the current pane.
Page Up	Moves up in the current pane.

8.6 Display Data Using Interactive SQL

Interactive SQL allows you to browse the information in databases.

You can display database information using the `select` statement in Interactive SQL. Once you enter the statement, click the Execute SQL Statement button on the toolbar.

After you execute the statement, the result set appears in the Results pane. You can use the scroll bars to see areas of the table that are outside your current view of the pane.

Example

For example, to list all the columns and rows of the `authors` table:

1. Start Interactive SQL and connect to the `pubs2` database.
2. Enter this in the SQL Statements pane:

```
select * from authors
```

3. On the toolbar, click the Execute SQL Statement button
You can add, delete, and update rows within the result set.

8.7 Edit Table Values in Interactive SQL

Once you execute a query in Interactive SQL, you can edit the result set to modify the database. You can also select rows from the result set and copy them for use in other applications. Interactive SQL supports editing, inserting, and deleting rows. These actions have the same result as executing `update`, `insert`, and `delete` statements.

Before you can copy, edit, insert, or delete rows, you must execute a query in Interactive SQL that returns a result set on the Results tab in the Results pane. When you edit the result set directly, Interactive SQL creates and executes a SQL statement that makes your change to the database table.

To edit a row or value in the result set, you must have the proper permissions on the table or column you want to modify values from. For example, to delete a row, you must have `delete` permission for the table the row belongs to.

Editing the result set may fail if you:

- Attempt to edit a row or column you do not have permission on.
- Select columns from a table with a primary key, but do not select all of the primary key columns.
- Attempt to edit the result set of a `join` (for example, there is data from more than one table in the result set).
- Enter an invalid value (for example, a string in a numeric column or a `NULL` in a column that does not allow `NULL`s).

When editing fails, an Interactive SQL error message appears explaining the error, and the database table values remain unchanged.




Once you make changes to table values, you must enter a `commit` statement to make the changes permanent. To undo your changes, you must execute a `rollback` statement.

8.7.1 Copying Rows from the Interactive SQL Result Set

You can copy rows directly from the result set in Interactive SQL and then paste them into other applications. Copying rows also copies the column headings. Copied data is comma-delimited, which allows other applications, such as Microsoft Excel, to format the copied data correctly. By default, copied data is in ASCII format, and all strings are enclosed in single quotes. You can select only consecutive rows in the result set.

Procedure

1. Choose a method to select the rows you want to copy:
 - Press and hold the Shift key while clicking the rows.
 - Press and hold the Shift key while using the Up or Down arrow.
2. Right-click the result set and select *Copy*. You can also copy the selected rows by pressing Ctrl-C.

The selected rows, including their column headings, are copied to the clipboard. You can paste them into other applications by selecting  *Edit*  *Paste*  or by pressing Ctrl-V.

8.7.2 Editing Rows from the Interactive SQL Result Set

The `EDIT` command allows you to change individual values within a row. You can change any or all of the values within existing rows in database tables. You must have `UPDATE` permission on the columns being modified. When you edit the result set, you can make changes to the values in only one row at a time.

Procedure

1. Select the row to edit and choose an edit method:
 - Right-click the result set and choose `EDIT` from the menu.
 - Press F2.

A blinking cursor appears in the first value in the row.

2. Press `Tab` to move the cursor from column to column across the row. You can also edit a value by clicking the value in the selected row.
3. Enter the new value.

You cannot enter invalid datatypes into a column. For example, you cannot enter a `string` datatype into a column that is configured for the `int` datatype.
4. Execute a `commit` statement to make your changes to the table permanent.

8.7.3 Inserting Rows into the Database from the Interactive SQL Result Set

The `INSERT` command adds a new blank row to the database table. Use the `Tab` key to move between columns in the result set to add values to the row. When you add values to the table, characters are stored in the same case as they are entered.

Context

You must have `insert` permission on the table to add new rows. See `insert` in *Reference Manual: Commands*.

Procedure

1. Right-click the result set and choose `Add` from the menu.

A new blank row appears in the result set with a blinking cursor in the first value in the row.

Press `Tab` to move the cursor from column to column across the row. You can also insert a value by clicking on the appropriate field in the selected row.

2. Enter the new value.

You cannot enter invalid datatypes into a column. For example, you cannot enter a `string` into a column that accepts the `int` datatype.

3. Execute a `commit` statement to make your changes to the table permanent.

8.7.4 Deleting Rows from the Database Using Interactive SQL

The `Delete` command removes the selected rows from a database table.

Context

You must have `delete` permission on the table to delete rows.

Procedure

1. Choose a method to select the rows you want to delete:
 - Press and hold the Shift key while clicking the rows.
 - Press and hold the Shift key while using the Up or Down arrow.

Delete nonconsecutive rows individually.

2. Right-click the result set and choose *Delete*. You can also delete the selected rows by pressing the *Delete* key.
3. Execute a `commit` statement to make your changes to the table permanent.

8.8 SQL Statements in Interactive SQL

You can enter all SQL statements as commands in the top pane of the Interactive SQL window. When you are finished typing, execute the statement to run it.

Execute a SQL statement by either:

- Press the Execute SQL Statement button, or
- Selecting F5.

To clear the SQL Statements pane:

- Choose **► Edit ► Clear SQL ◀**, or
- Press Escape.

If you are running a long-running query, Interactive SQL displays a splash screen that describes some diagnostic tips.

8.8.1 Canceling an Interactive SQL Command

Use the Interrupt button on the Interactive SQL toolbar to cancel a command.

Procedure

A Stop operation stops current processing and prompts for the next command.

If a command file was being processed, you are prompted for an action to take (*Stop Command File*, *Continue*, or *Exit Interactive SQL*). You can control these actions with the Interactive SQL `ON_ERROR` option. When an interruption is detected, one of three different errors is reported, depending on when the interruption is detected.

Action at Interruption

Errors Reported

Requests

If the interruption is detected when Interactive SQL is processing the request (as opposed to the database server), this message appears, and Interactive SQL stops processing immediately and the current database transaction is not updated:

```
⌘, Output Code
```

```
ISQL command terminated by user
```

Data manipulation commands

If the interruption is detected by the database server while processing a data manipulation command (`select`, `insert`, `delete`, or `update`) this message appears, and the effects of the current command are left unfinished but the rest of the transaction is left intact:

```
⌘, Output Code
```

```
Statement interrupted by user.
```

Data definition commands

If the interruption is detected while the database server is processing a data definition command (`create <object>`, `drop <object>`, `alter <object>`, and so on.), this message appears:

```
⌘, Output Code
```

```
Terminated by user -- transaction rolled back
```

Since data definition commands all perform a `commit` automatically before the command starts, `rollback` simply cancels the current command.

This message also occurs when the database server is running in bulk operations mode executing a command that modifies the database (`insert`, `update`, and `delete`). In this case, `rollback` cancels not only the current command, but everything that has been done

Action at Interruption

Errors Reported

since the last `commit`. In some cases, it may take a considerable amount of time for the database server to perform the automatic `rollback`.

8.8.2 Combining Multiple Statements

Interactive SQL allows you to enter multiple statements at the same time. End each statement with the Transact-SQL command, `go`.

Procedure

1. Enter multiple statements in the SQL Statements pane, and separate them by `go`.

```
update titles
set price = 21.95
where pub_id = "1389"
go
update titles
set price = price + 2.05
where pub_id = "0736"
go
update titles
set price = price+2.0
where pub_id = "0877"
go
```

2. Execute all of the multiple statements by performing either of the following:
 - Click *Execute SQL Statement* on the toolbar.
 - Press `F9`.
3. After execution, the commands remain in the SQL Statements pane. To clear this pane, press the `Esc` key.
4. (Optional) To roll back your changes, enter `rollback` then execute the statement.

8.8.3 Looking Up Tables, Columns, and Procedures

Use `Tools > Lookup Table Name` and `Tools > Lookup Procedure Name` to look up the names of tables, columns, or procedures stored in the current database and insert them at your cursor position.

Prerequisites

Install jConnect for JDBC in order to use these Interactive SQL tools.

Procedure

Enter the first characters of a table, column, or procedure in the Lookup Table Name and Lookup Procedure Name dialogs. This list narrows to display only those items that start with the text you entered.

You can use the standard SQL wildcard character % to mean “match anything”. Clear the search area to display all items.

Looking Up	Description
Table names	<ol style="list-style-type: none">1. Choose ► Tools ► Lookup Table Name .2. Select the table and click OK to insert the table name into the SQL Statements pane.
Column names	<ol style="list-style-type: none">1. Choose ► Tools ► Lookup Table Name .2. Find and select the table containing the column.3. Click Show Columns.4. Select the column and click OK to insert the column name into the SQL Statements pane.
Procedure names	<ol style="list-style-type: none">1. Choose ► Tools ► Lookup Procedure Name .2. Find and select the procedure.3. Click OK to insert the procedure name into the SQL Statements pane.

8.8.4 Recalling Executed Commands

When you execute a command, Interactive SQL automatically saves it in a history list that lasts for the duration of your current session. Interactive SQL maintains a record of as many as 50 of the most recent commands.

Procedure

Choose one of these commands:



Recall Command Options	Description
View the commands list	To view the entire list of commands in the Command History dialog, perform one of the following: <ul style="list-style-type: none">○ Press Ctrl + H.○ Select the book icon in the toolbar.
Recall a command from a list	The most recent commands appear at the bottom of the list. To recall a command, highlight it and click OK . It appears in the SQL Statements pane.
Recall a command	To recall commands without the Command History dialog: <ul style="list-style-type: none">○ Use the arrows in the toolbar to scroll back and forward through your commands, or○ Press Alt + RIGHT ARROW and Alt + LEFT ARROW.
Save the commands	Save commands in text files for use in a subsequent Interactive SQL session.

8.8.5 Logging Commands

With the Interactive SQL logging feature, you can record commands as you execute them. Interactive SQL continues to record until you stop the logging process, or until you end the current session. The recorded commands are stored in a log file.

Procedure

Start or stop logging:

Com- mand	Description
Start log- ging	<p>You can use either:</p> <ul style="list-style-type: none">○ The GUI option:<ol style="list-style-type: none">1. Choose .2. In the Save dialog, specify a location and name for the log file.3. Click <i>Save</i> when finished○ Enter the command, where <code>c:\<file_name>.sql</code> is the path, name, and extension of the log file:<pre>start logging "c:\<file_name>.sql"</pre><p>A log file must have the <code>.sql</code> extension. Include the single quotation marks if the path contains embedded spaces.</p><p>Once you start logging, all commands that you try to execute are logged, including ones that do not execute properly.</p>
Stop log- ging	<p>You can use either:</p> <ul style="list-style-type: none">○ The GUI option by choosing .○ Enter the command:<pre>stop logging</pre>

i Note

The commands `start logging` and `stop logging` are not Transact-SQL commands, and are not supported by SAP ASE outside the Interactive SQL dialog box.

8.9 Configure Interactive SQL

You can configure Interactive SQL in the Options dialog, which provides settings for commands, appearance, import/export features, and messages.

After you make your selections, choose *OK* or *Make Permanent*. Interactive SQL starts the configuration you select when you click *Make Permanent*.

Set each option by either using the GUI, or the `set option` statement.

To access the Options dialog, choose **► Tools > Options ▾**.

8.9.1 General Dialog Box

In the General dialog box, select when to commit transactions, how Interactive SQL acts when an error occurs, and whether to make a copy of scripts or commands into a log.

Components	Description
Commit	Lets you select when transactions are committed. You can commit transactions: <ul style="list-style-type: none">• Automatically after each statement is executed, or• Only when you exit your Interactive SQL session You can also commit manually by entering an explicit <code>commit</code> command whenever appropriate. The default behavior is that transactions are committed when you exit Interactive SQL.
Command files	Determines how Interactive SQL acts when an error occurs: <ul style="list-style-type: none">• Continue – Interactive SQL displays the error message in the Results pane but does not exit. Correct the problem, then reissue the command.• Exit – Interactive SQL exits when an error occurs.• Notify and Continue – Interactive SQL displays the error message in a dialog box and describes the error but does not exit• Notify and Exit – Interactive SQL displays the error message in a dialog box, describes the error, and exits.• Notify and stop – Interactive SQL displays the error message and describes the error.• Prompt – the default setting. Interactive SQL displays a message box asking if you want to continue.• Stop – Interactive SQL displays the error message in the Results pane. Correct, then reissue the command.
Echo Command Files to Log	When you enable logging, this option causes SQL statements executed from script files (or command files) to be copied to the log along with the SQL statements entered interactively. If you disable this option, only SQL statements entered interactively are copied to the log when you start logging.

Components	Description
Folders	Determines in which directory the browser should start looking for files. Select either <i>Last folder used</i> or <i>Current folder</i> .

8.9.2 Result Dialog Box

The Results dialog box has multiple components that let you configure how your results from Interactive SQL appear.

Component	Description
Display Null Values	Lets you specify how you want nulls to appear in the table columns when you browse data. The default setting is (NULL).
Maximum Number of Rows to Display	Limits the number of rows that appear. The default setting is 500.
Truncation Length	Limits the number of characters that appear in each column in the Results pane in Interactive SQL. The default setting is 30.
Show Multiple Result Sets	<p>Enables or disables the display of multiple result sets. For example, you can use this feature when you create a procedure containing multiple <code>select</code> statements. If you enable this option, you can see each result set on a separate tab in the Results pane when you call the procedure.</p> <p>If you are using the jConnect driver, choosing to display multiple result sets requires Interactive SQL to wait for an entire result set to be retrieved before any rows appear. This may result in longer waits for large result sets. This option is off by default.</p>
Show Row Number	Check if you want the row numbers displayed in the result set.
Automatically Refetch Result	Enables or disables the ability of Interactive SQL to automatically regenerate the most recent result set after you execute an <code>insert</code> , <code>update</code> , or <code>delete</code> statement. For example, if you are updating a table with the Results tab in the Results pane displaying the rows about to be affected, this option causes Interactive SQL to automatically refresh the Results tab to reflect the executed changes. This option is on by default.
Console Mode	Select how you want the result sets displayed in the console; only the last result sets, all result sets, or no result sets.
Font	Select which font you want to use for the result set.

8.9.3 Import/Export Dialog Box

The Import/Export dialog box allows you to configure import and export settings in Interactive SQL.

Component	Description
Default export format	Select the default file format for exporting. This format is automatically selected in the Files of Type field in the Save dialog, but you can still choose other formats. The default is also used when Interactive SQL interprets an output statement if no format is specified. The default setting is ASCII.
Default import format	Select the default file format for importing. This format is automatically selected in the Files of Type field in the Open dialog, but you can still choose other formats. The default is also used when Interactive SQL interprets an <code>input</code> statement if no format is specified. The default setting is ASCII.
ASCII options	Specify the default symbols that are used for the field separator, quote string, escape character, and the default encoding datatype when you import or export data in the ASCII format. The default settings are the comma (,) for the field separator, an apostrophe (') for the quote string, and a backslash (\) for the escape character. By default, Interactive SQL uses the default datatype of the server.

8.9.4 Messages Dialog Tab

The Messages dialog box allows you to configure specify message settings in Interactive SQL.

Component	Description
Measure execution time for SQL statements	Enables or disables the ability of Interactive SQL to measure the time it takes for a statement to execute. When this option is enabled (which is the default), the time appears in the Messages pane.
Show separate Messages pane	Lets you specify where information from the database server appears. By default, messages appear on the Messages tab in the Results pane. If you select this option, database server information appears in a separate Messages pane in the Interactive SQL window.
Default number of lines in Messages pane	Lets you specify the initial height (in lines) of the Messages pane. The default is 7 lines.

8.9.5 Editor Dialog Box

The Editor dialog box allows you to configure edit settings in Interactive SQL.

Component	Description
Editor	Select your scrollbar style preference: vertical, horizontal, or both.
Tabs	Determines how tabs are used in your SQL text: <ul style="list-style-type: none">• Tab size – enter the number of spaces you want each tab to comprise.• Indent size – enter the number of spaces for each indent.• Tab radio buttons – select <i>Insert spaces</i> to convert tabs to spaces when you indent SQL text. Select <i>Keep tabs</i> to retain tabs as spaces when you indent SQL text.• Auto indent – Select:<ul style="list-style-type: none">◦ <i>None</i> – if you do not want to automatically indent SQL text◦ <i>Default</i> – to use the default tab and indent settings◦ <i>Smart</i> – if you want Interactive SQL to automatically indent SQL text. Select <i>Indent open brace</i> to indent open braces or <i>Indent closing brace</i> to indent the closing braces. Interactive SQL displays how these decisions affect the text in the window below the buttons.
Format	Determines the look of your SQL text: <ul style="list-style-type: none">• Text Highlighting – select the type of text you want to highlight from the list (keywords, comments, strings, and so on).• Foreground – select the foreground color of the text.• Background – select the color of the text's background field.
Style	<ul style="list-style-type: none">• Font size – select the size font.• Caret color – determines the color of the caret.• Reset All – returns all styles to original selections.
Print	Customizes your printed jobs: <ul style="list-style-type: none">• Header – enter the header text.• Footer – enter the footer text.• Font size – select the font size.

8.9.6 Query Editor Dialog Box

The Query Editor dialog box allows you to configure the query editor settings in Interactive SQL.

Component	Description
Fully qualify table and column names	Select this to have Interactive SQL prefix table names with the owner (for example, <code>dbo.authors</code>) and prefix column names with the owner and table names (for example, <code>dbo.titles.price</code>).

Component	Description
Quote names	Select this to automatically put quotes around table and columns names to avoid conflicts with reserved words.
Get list of tables on startup	Select this to automatically get a list of tables in the database when the query editor is started.

8.10 Processing Command Files

This section describes how to process files consisting of a set of commands.

8.10.1 Saving SQL Statements to a File

In Interactive SQL, the output for each command remains in the Results pane until the next command is executed. To keep a record of your data, you can save the output of each statement to a separate file.

Context

If `statement1` and `statement2` are two `select` statements, then you can save them to `file1` and `file2`, respectively:

```
Statement1; OUTPUT TO file1
go
statement2; OUTPUT TO file2
go
```

For example, this command saves the result of a query:

```
select * from titles
go
output to "C:\My Documents\Employees.txt"
```

8.10.2 Executing Command Files

There are three ways to execute command files.

Context

- Use the Interactive SQL `read` command to execute command files. this statement executes the file `temp.sql`:

```
read temp.SQL
```

- Load a command file into the SQL Statements pane and execute it directly from there.
You load command files back into the SQL Statements pane by choosing **File > Open**. Enter `transfer.sql` when prompted for the file name.
The SQL Statements pane in Interactive SQL has a limit of 500 lines. For command files larger than this, use a generic editor capable of handling large files and use the `read` command to import it into Interactive SQL, which has no limit on the number of lines it can read.
- Supply a command file as a command-line argument for Interactive SQL.

8.10.3 Saving, Loading, and Running Command Files

Save the commands in the SQL Statements pane so they are available for future Interactive SQL sessions.

Context

The files in which you save them, called command files and commonly referred to as scripts, are text files containing SQL statements. You can use any editor to create command files, and include comment lines along with the SQL statements to be executed. When you begin a new session, you can load the contents of a command file into the SQL Statements pane, or you can run the contents immediately.

Action	Description
Save the commands from the SQL Statements pane to a file	<ol style="list-style-type: none">1. Choose File > Save.2. In the Save dialog, specify a location, name, and format for the file. Click Save when finished.
Load commands from a file into the SQL Statements pane	<ol style="list-style-type: none">1. Choose File > Open.2. In the Open dialog, find and select the file. Click Open when finished.
Run a command file immediately	<ol style="list-style-type: none">1. Choose File > Run Script.

Action	Description
	<p>2. The Run Script menu item is the equivalent of a <code>read</code> statement. For example, in the SQL Statements pane, you can also run a command file by typing the following, where <code>c:\filename.sql</code> is the path, name, and extension of the file. Single quotation marks (as shown) are required only if the path contains spaces:</p> <pre data-bbox="850 584 1396 636">READ "<c:\filename.sql>"</pre> <p>3. In the Open dialog, find and select the file. Click <i>Open</i> when finished.</p> <p>The Run Script menu item is the equivalent of a <code>READ</code> statement. For example, in the SQL Statements pane, you can also run a command file by typing the following, where <code><c:\filename.sql></code> is the path, name, and extension of the file. Single quotation marks (as shown) are required only if the path contains spaces:</p> <pre data-bbox="804 943 1396 994">READ 'c:\filename.sql'</pre>

8.11 The SQL Escape Syntax in Interactive SQL

Interactive SQL supports JDBC escape syntax, which allows you to call stored procedures from Interactive SQL regardless of the database management system you are using.

The general form for the escape syntax is:

```
{{ keyword parameters }}
```

You must use double braces. This doubling is specific to Interactive SQL. There must not be a space between successive braces: "`{{`" is acceptable, but "`{ {`" is not. As well, you cannot use newline characters in the statement. You cannot use the escape syntax in stored procedures because they are not executed by Interactive SQL.

You can use the escape syntax to access a library of functions implemented by the JDBC driver, including `number`, `string`, `time`, `date`, and `system` functions.

For example, to obtain the name of the current user in a database management system-neutral way, type:

```
select {{ fn user() }}
```

The functions that are available depend on the JDBC driver that you are using. The numeric functions that are supported by `jConnect` are:

<code>abs</code>	<code>cos</code>	<code>log10</code>	<code>sign</code>
------------------	------------------	--------------------	-------------------

acos	cot	pi	sin
asin	degrees	power	sqrt
atan	exp	radians	tan
atan2	floor	rand	
ceiling	log	round	

The string functions that are supported by jConnect are:

ascii	difference	repeat	space
char	lcase	right	substring
concat	length	soundex	ucase

The system functions that are supported by jConnect are:

database	ifnull	user	convert
----------	--------	------	---------

The datetime functions that are supported by jConnect are:

curdate	dayofweek	monthname	timestampadd
curtime	hour	now	timestampdiff
dayname	minute	quarter	year
dayofmonth	month	second	

A statement using the escape syntax should work in Adaptive Server Anywhere, SAP ASE, Oracle, SQL Server, or another database management system that you are connected to from Interactive SQL. For example, to obtain database properties with the sa_db_info procedure using SQL escape syntax, type this in the SQL Statements pane in Interactive SQL:

```
((CANN sa_db_info(1)))
```


8.12 Interactive SQL Commands

Interactive SQL includes a set of commands that are entered in the top pane of the Interactive SQL display. These commands are intended only for Interactive SQL and are not sent to the SAP ASE server for execution.

The commands available for Interactive SQL are:

Command	Description
clear	Clears the Interactive SQL panes.
configure	Opens the Interactive SQL Options dialog.
connect	Establishes a connection to a database.
disconnect	Drops the current connection to a database.
exit	Leaves Interactive SQL.
input	Imports data into a database table from an external file or from the keyboard.
output	Generates output of the current query results to a file.
parameters	Specifies parameters to an Interactive SQL command file.
read	Reads Interactive SQL statements from a file.
set connection	Changes the current database connection to another server.
set option	Use this statement to change the values of Interactive SQL options.
start logging	Use this statement to start logging executed SQL statements to a log file.
stop logging	Use this statement to stop logging of SQL statements in the current session.
system	Use this statement to launch an executable file from within Interactive SQL.

9 Interactive `sybcluster` Commands Reference

Some interactive commands are active before you connect to a cluster, while others are active only after you connect to a cluster.

The `sybcluster` command prompt includes the current cluster and the default instance when these values have been set.

Prompt	When <code>sybcluster</code> is:
>	Not connected to a cluster.
<cluster_name>>	Connected to a cluster.
<cluster_name> <instance_name>>	Connected to a cluster and a default instance has been set.

Related Information

[sybcluster \[page 174\]](#)

[sybcluster \[page 174\]](#)

9.1 Commands Active Before Connecting to a Cluster

These commands are active before you connect to a cluster, and are not available after you connect to a cluster.

Command	Description
<code>connect</code>	Connects to an existing cluster.
<code>create cluster</code>	Creates a new cluster.
<code>deploy plugin</code>	Deploys the configuration information for a single instance of the cluster to the agent.
<code>exit</code>	Exits <code>sybcluster</code> .
<code>help</code>	Lists the currently available <code>sybcluster</code> interactive commands.
<code>quit</code>	Exits <code>sybcluster</code> .
<code>show agents</code>	Displays information about available agents.
<code>upgrade server</code>	Updates SAP ASE to SAP ASE Cluster Edition.

9.2 Commands Active After Connecting to a Cluster

These commands are active only after you connect to a cluster:

Command	Description
<code>add backupserver</code>	Configures one or more new Backup Servers on nodes in the cluster not currently configured for Backup Server.
<code>add instance</code>	Adds one new instance to the cluster.
<code>create backupserver</code>	Create Backup Server.
<code>create xpserver</code>	Creates an XP Server.
<code>diagnose { cluster instance }</code>	Performs a set of checks to ensure the cluster or instance is working properly.
<code>disconnect</code>	Loses all connections to the current cluster and returns the cluster to the unconnected state.
<code>drop backupserver</code>	Drops the Backup Server.
<code>drop cluster</code>	Removes each instance from the cluster and deletes the cluster definition from the cluster configuration file.
<code>drop xpserver</code>	Drops the XP Server.
<code>drop instance</code>	Removes an instance from the cluster.
<code>exit</code>	Exits <code>sybcluster</code> .
<code>help</code>	Lists the currently available <code>sybcluster</code> interactive commands.
<code>localize</code>	Displays current values for default language, charset, and sort order. Allows you to change the default values and add or remove languages.
<code>quit</code>	Exits <code>sybcluster</code> .
<code>set backupserver</code>	Changes the listening port number for Backup Server on one or more nodes.
<code>set cluster</code>	Sets properties for the cluster.
<code>set instance</code>	Sets properties for the instance.
<code>set xpserver</code>	Changes the listening port number for XP Server on one or more nodes.
<code>show backupserver config</code>	Displays the names of the nodes on which Backup Server is configured and the associated listening port number.
<code>show cluster</code>	Displays configuration, log, and status values for the cluster.
<code>show instance</code>	Displays information about an instance.
<code>show membership mode</code>	Displays the cluster's current membership mode, which specifies whether or not the cluster supports Veritas Cluster Server integration.
<code>show session</code>	Displays current agent and discovery information.
<code>show xpserver config</code>	Displays the names of the instances and nodes on which XP Server is configured and the associated listening port number.

Command	Description
<code>shutdown cluster</code>	Shuts down the cluster by executing a Transact-SQL <code>shutdown</code> command for each instance in the cluster.
<code>shutdown instance</code>	Shuts down the instance by executing a Transact-SQL <code>shutdown</code> command.
<code>start cluster</code>	Starts all instances in the cluster.
<code>start instance</code>	Starts an instance in the cluster.
<code>use</code>	Sets the default instance.

9.3 add backupserver

(Cluster Edition only) Configures Backup Server for nodes not already configured for Backup Server.

Syntax

```
add backupserver
```

Examples

Add Backup Server

Adds a Backup Server to "mycluster" on nodes "blade3" and "blade4."

```
add backupserver
```

```
Finding nodes for which Backup Server is not configured...
Do you want to configure Backup Server for node "blade3"? [Y]
Please enter the Backup Server port number for node "blade3": 5001
Do you want to configure Backup Server for node "blade4"? [Y]
Please enter the Backup Server port number for node "blade4": 50011
```

Usage

You can configure Backup Server for one or more nodes in the cluster.

`add backupserver` lets you add additional nodes when configuring for single Backup Servers. You cannot use this command to add multiple Backup Servers.

9.4 add instance

(Cluster Edition only) Adds one new instance to the cluster.

You can add an instance interactively, with `sybcluster` prompting for necessary configuration information, or through an input file. `add instance` also creates a local system temporary database for the new instance. `add instance` prompts vary depending on whether configuration for the cluster is shared or private.

Syntax

```
add instance <instance_name> [file "<input_file>"]
```

Parameters

`<instance_name>`

is the name of the instance.

file "`<input_file>`"

specifies a file name that contains the configuration information for adding an instance.

Usage

- `add instance` creates a local system temporary database for the new instance. Before executing `add instance`, make sure that a device with sufficient space for the local system database exists.
- The input file for `add instance` has the same format as the cluster input file. However, the `add instance` input file may limit the instance definitions to the new instance in the node section.
- `add instance` may prompt for this information:
 - Instance name, if you did not enter an instance name in the command statement.
 - Node hosting the instance
 - Port number of the UAF agent on the node
 - Query port number
 - Primary and secondary address of the node
 - Primary and secondary port specification
- If you have configured single Backup Servers for the cluster, `add instance` asks whether Backup Server is already configured for the new instance node. If no, `add instance` asks if Backup Server should be configured. If yes, it prompts for the Backup Server port for the node.
If you have configured multiple Backup Servers for the cluster, `add instance` prompts for:
 - Name of the Backup Server
 - Backup Server log file path

- Backup Server port for the new instance
- add instance also prompts for XP Server port number information for the new instance.
- If the installation mode is private, add instance prompts for additional information for the new instance:
 - \$SYBASE home directory.
 - Environment shell script path.
 - SAP ASE home directory.
 - Server configuration file path.
 - Interfaces file path, if LDAP is not configured.

9.5 connect

(Cluster Edition only) Connects to an existing cluster.

Syntax

```
connect [ to <cluster_name >]
  [ login <login_name>]
  [ password [<password>]]
  [ agent "<agent_spec> [, <agent_spec> [,...]]" ]
  [ discovery " <discovery_spec> [, <discovery_spec> [, ...]]" ]
```

Parameters

<cluster_name>

is the name of the cluster to which you are connecting.

login <login_name>

is the management agent login.

password <password>

is the management agent password.

agent <agent_spec>

identifies the agent running on the cluster and the port number that sybcluster uses to connect the agent.

The format is <node_name:port_number>[, <node_name>:<port_number>] [, ...]. The default port number is 9999. This is the preferred method for connecting to a cluster.

discovery <discovery_spec>

is the discovery method used to identify the agents responsible for the requested cluster.

The format is `method[(<method_specification>) [, (<method_specification>) [, ...]]`. See the description for `sybcluster -d <discovery_list>` for more information about discovery methods.

Examples

Example 1

Connects to “mycluster,” when “mycluster” is the default cluster specified in the `sybcluster` command statement:

```
connect
```

Example 2

Connects to “mycluster” using the agent specification and default port numbers:

```
connect to mycluster agent "blade1,blade2,blade3"
```

Usage

A direct connection is one in which the user identifies the cluster nodes and, optionally, the port numbers for the UAF agents. Sample agent specifications are:

- `myhost` – identifies the host node and assumes the default listening port of 9999.
- `myhost.mydomain.com` – includes the host domain name.
- `myhost:9999` – identifies the host node and listening port number.

9.6 create backupserver

(Cluster Edition only) Creates a Backup Server for the cluster, or, if the cluster is configured for multiple Backup Servers, creates a Backup Server for each instance in the cluster.

Syntax

```
create backupserver
```

Examples

Create Backup Server cluster

Creates the Backup Server "mycluster_BS" for "mycluster":

```
create backupserver
Do you want to create multiple Backup Servers? [Y] N
Enter the Backup Server name: [mycluster_BS]
Enter the Backup Server log file path: [$SYBASE/ASE-15_0/
install/mycluster_BS.log]
Do you want to create a Backup Server for node "blade1"? [Y]
Enter the Backup Server port number for node "blade1":
The Backup Server "mycluster_BS" was successfully defined.
```

Create multiple Backup Servers

Creates multiple Backup Servers for "mycluster" running on "ase1" on "blade1" and "ase2" on "blade2":

```
create backupserver
Do you want to create multiple Backup Servers? [Y] Y
The "dump/load" commands would be routed to appropriate Backup Server based
on following policies:
1. Dedicated - Each instance associated with exactly one Backup Server.
2. Round Robin - Choose the Backup Server with least number of requests in
round robin fashion starting from global cluster level counter.
Enter the number corresponding to the policy to be used: [1] 1
Enter the Backup Server name for instance ase1: [ase1_BS]
Enter Backup Server log file path: [/remote/var/sybase/install/ase1_BS_log]
Enter the Backup Server port for node "blade1": 23001
Enter the Backup Server name for instance ase2: [ase2_BS]
Enter Backup Server log file path: [/remote/var/sybase/install/ase2_BS_log]
Enter the Backup Server port for node "blade2": 23002
Backup Servers successfully defined.
```

Usage

`create backupserver` prompts for the Backup Server listening port on each node. It copies other necessary configuration information from the cluster configuration file. `create backupserver`:

- Creates directory service entries for Backup Server on each node.
- Creates the Backup Server configuration and log files, and the `RUN_<backup_server>` script.
- Adds the Backup Server name to the cluster's `sysservers` table.
- Enables Backup Server HA.

9.7 create cluster

(Cluster Edition only) Creates an SAP ASE shared-disk cluster.

Enter the necessary configuration information interactively as responses to a series of prompts, or use an input file.

Syntax

```
create cluster [<cluster_name> ]
  [ login <login_name> ]
  [ password <password> ]
  [ agent "<agent_spec>[, <agent_spec>[, ...]]" ]
  [ discovery "<discovery_spec>[, <discovery_spec>[, ...]]" ]
  [ file "<input_file>" ]
```

Parameters

<cluster_name>

is the name of the cluster.

login <login_name>

is the management agent login.

password <password>

is the management agent password.

agent <agent_spec>

identifies the agent running on the cluster and the port number that `sybcluster` uses to connect the agent.

The format is <node_name>:<port_number>

[, <node_name>:<port_number>] [, ...]. The default port number is "9999."

discovery <discovery_spec>

is the discovery method used to identify the agents responsible for the requested cluster.

The format is method[(<method_specification>)]

[, (<method_specification>) [, ...]]. See the description for `sybcluster -d <discovery_list>`.

file "<input_file>"

is the operating system input file for creating the cluster.

Examples

Create a cluster with `sybcluster` prompts

Creates a new cluster called "mycluster"; `sybcluster` prompts you for the information necessary to create the cluster:

```
create cluster mycluster
```

Create a cluster using a configuration file

Creates a new cluster called “mycluster1” using configuration information supplied in the `mycluster1.xml` file:

```
create cluster mycluster1 file mycluster1.xml
```

Usage

When you create a cluster, `sybcluster` prompts for:

- Cluster name, if one has not been provided.
- Number of instances.
- Installation mode for the cluster (private or shared).
- Complete path to the master, quorum, PCI, `systemdb`, `sybsysprocs`, and temporary database devices.
- Path to the interfaces file, if LDAP is not configured and this is a shared install.
- (Optional) Trace flags.
- Complete path to the `dataserver` configuration file, if this is a shared install.
- Primary and secondary interconnection protocols.
- Instance host name, port number, private address, log file location, and start-up arguments.
If this is a private installation, `sybcluster` also prompts for the `$SYBASE` installation directory, SAP ASE home directory, `dataserver` configuration file location, and interfaces file location (if LDAP is not configured).

If `sybcluster` detects the Veritas Cluster Server (VCS) on the system, `sybcluster` asks if it should check whether device is managed by VCS.

After you create and confirm the cluster, `create cluster` prompts for an I/O fencing check, which checks whether or not each device has I/O fencing capability (see the Installation Guide for a description of I/O fencing).

9.8 create xpserver

(Cluster Edition only) Creates an XP Server for each instance in the cluster.

Syntax

```
create xpserver
```

Examples

Create an XP Server

Creates an XP Server for each instance in "mycluster":

```
create xpserver
Enter the XP Server port number for instance "ase1":
Enter the XP Server port number for instance "ase2":
Enter the XP Server port number for instance "ase3":
The XP Server was successfully defined for each instance.
```

Usage

The `create xpserver` command prompts for the XP Server listening port for each node in the cluster. Other information necessary to create the XP Server is read from the cluster configuration file.

9.9 deploy plugin

(Cluster Edition only) Adds the configuration information for a single instance of the cluster to the agent.

Syntax

```
deploy plugin
[ login <login_name> ]
[ password <password> ]
[ agent <agent_spec> ]
[ discovery <discovery_spec> ]
```

Parameters

`login <login_name>`

is the management agent login.

`password <password>`

is the management agent password.

`agent <agent_spec>`

identifies the agent running on the cluster and the port number that `sybcluster` uses to connect the agent.

The format is “<node_name:port_number> [, <node_name>:<port_number>] [, ...]”. The default port number is “9999”.

discovery <discovery_spec>

is the discovery method used to identify the agents responsible for the requested cluster.

The format is “<method>[(<method_specification>)] [, (<method_specification>)] [, ...]”. See the description for `sybcluster -d <discovery_list>` for more information about discovery methods.

Examples

Deploy plug-in using UAF agent

Deploys the plug-in using the UAF agent on host “system1501”:

```
deploy plugin agent system1501
```

`sybcluster` prompts for the cluster name, cluster node number, installation mode, full path to the quorum device, the environment shell script path, and the SAP ASE home directory.

Deploy plug-in using discovery

Deploys the plug-in using discovery to identify the agent:

```
deploy plugin discovery udp
```

Usage

After you execute `deploy plugin`, `sybcluster` prompts you for:

- Path to the quorum device.
- Path to the Sybase home directory.
- Installation mode (private or shared) – the default is shared.
- Location of your Sybase environment script – this must be a shell script that can be loaded using the “.<file_name>” syntax, such as “sh” or “bash.” An example is `SYBASE.sh`.
- Location of your SAP ASE software directory – the default is `<sybase_home_directory>/ASE-15_0`. When entering the location of the SAP ASE software directory, include the full path. Do not use `$SYBASE`.

The `dataserver` login and password are configured using the `login` command, which updates all Adaptive Server plug-ins managing the cluster.

9.10 diagnose cluster

(Cluster Edition only) Performs a set of checks to ensure that the cluster is working correctly.

Syntax

```
diagnose cluster
```

Examples

Example 1

Checks that "mycluster" is working correctly:

```
diagnose cluster
Cluster name.....mycluster
Maximum instances.....4
Cluster node count.....1
Instances defined.....4
Is cluster locked.....Yes
JDBC connection available.....1 ase1 Yes
JDBC connection available.....2 ase2 Yes
JDBC connection available.....3 ase3 Yes
JDBC connection available.....4 ase4 Yes
Instance Public Network.....1 ase1 on blade1 (10.22.79.39) Reachable: Yes
Instance Public Network.....2 ase2 on blade1 (10.22.79.39) Reachable: Yes
Instance Public Network.....3 ase3 on blade1 (10.22.79.39) Reachable: Yes
Instance Public Network.....4 ase4 on blade1 (10.22.79.39) Reachable: Yes
Has private Primary network... No
Has private Secondary network.. No
Network ports required/instance 20
Minimum port allowed..... 1025
Maximum port allowed.....65535
Current port strategy..... Public primary and secondary unique.
...The ports are sequenced primary followed by the next instance primary.
...When the primaries are completed the secondary ports follow the same
pattern.
Recommended port strategy..... Public primary and secondary unique.
...The ports are sequenced primary followed by the next instance primary.
...When the primaries are completed the secondary ports follow the same
pattern.
```

Usage

diagnose cluster checks that:

- An agent is running on each instance in the cluster.
- The number of instances in the cluster does not exceed the value set for maximum number of instances.

- The quorum file exists.
- All instances are defined in the interfaces file and that port numbers do not conflict.
- The primary and secondary protocol specifications do not overlap.
- Each of the \$SYBASE directories are shared.

9.11 diagnose instance

(Cluster Edition only) Performs a set of checks to ensure that the instance is configured correctly.

Syntax

```
diagnose instance [<instance_name>]
```

Parameters

<instance_name>

is the name of an instance. `sybcluster` uses the default value if you do not specify an instance name.

Examples

Example 1

Displays and verifies configuration information for “ase1” on “mycluster”:

```
diagnose instance ase1
Cluster name ..... mycluster
Instance id ..... 1
Instance name ..... ase1
Node name ..... blade1
Query port ..... 7101
JDBC connection available .... Yes
Instance Public Network ..... 1 ase1 on blade1 (10.33.108.139)
Reachable:.....Yes
Minimum port allowed..... 1025
Maximum port allowed ..... 65535
Instance port range ..... 1 Primary ase1 17100 to 17115 (16) Okay
Instance port range ..... 1 Secondary ase1 17165 to 17180 (16) Okay
```

Usage

Use `diagnose cluster` to ensure the cluster is configured correctly.

Related Information

[diagnose cluster \[page 317\]](#)

9.12 disconnect

(Cluster Edition only) Closes all connections to the current cluster and returns `sybcluster` to an unconnected state.

Syntax

```
disconnect
```

Usage

Use `connect` to reconnect to an existing cluster.

Related Information

[connect \[page 310\]](#)

9.13 drop backupserver

(Cluster Edition only) Drops Backup Server from a node or from the cluster. If the cluster is configured for multiple Backup Servers, drops all Backup Servers.

Syntax

```
drop backupserver
```

Examples

Drop a single Backup Server

```
drop backupserver
Do you want to drop the Backup Server from:
  1. Selected nodes
  2. Cluster
Enter choice: 1
Do you want to drop Backup Server from node "blade1"? [N] y
Do you want to drop Backup Server from node "blade2"? [N]
The Backup Server has been dropped from selected nodes.
```

Drop the Backup Server from the cluster

```
drop backupserver
Do you want to drop the Backup Server from:
  1. Selected nodes
  2. Cluster
Enter choice: 2
Are you sure you want to drop Backup Server mycluster_BS from cluster
mycluster? (Y or N): [N] y
The Backup Server has been dropped.
```

Drop all multiple Backup Servers

Drops all of the multiple Backup Servers that were configured for the cluster:

```
drop backupserver
Multiple Backup Server are defined for the cluster. This command will drop
all of them.
Are you sure you want to continue? (Y/N): [N] y
The Backup Server has been dropped.
```

Usage

Use `drop backupserver` to drop a Backup Server from the cluster.

9.14 drop cluster

(Cluster Edition only) Removes each instance from a cluster and then removes the cluster definition from the cluster configuration file.

The `drop cluster` command also removes regular files associated with the cluster and the cluster agent plug-ins that manage the cluster. The cluster must be down to use `drop cluster`.

Syntax

```
drop cluster
```

Examples

Drop all instances

Drops all instances from the current cluster and deletes the cluster:

```
drop cluster
```

Usage

- `sybcluster` prompts for confirmation before dropping the cluster.
- Due to certain file-system locking, the UAF plug-ins may not be deleted after you use `drop cluster`. Verify that the `$SYBASE_UA/nodes/*/plugins/<cluster_name>` directory has been deleted. If the directory still exists, delete it.
- `drop cluster`:
 - Removes cluster and instance entries from the interfaces file, configuration files, and specified data devices.
 - Marks the quorum device as unused.
 - Shuts down and removes the cluster's UAF agent plug-ins.

9.15 drop instance

(Cluster Edition only) Removes an instance from the cluster configuration file and updates the agent and discovery services.

`drop instance` also notifies the cluster that an instance is to be dropped, and removes the instance and interfaces file entries.

Syntax

```
drop instance [<instance_name>]
```

Parameters

<instance_name >

identifies an instance in a cluster. If an instance name is not specified, `sybcluster` uses the default specified in the `sybcluster` command line.

Examples

Remove an instance

Removes the "ase3" instance from the current cluster:

```
drop instance ase3
```

Usage

- Before you use `drop instance`:
 - Start at least one instance in the cluster other than the instance you plan to drop.
 - Shut down the instance you plan to drop.
 - Manually remove instance-specific information. `drop instance` automatically removes the local system temporary database.
- `sybcluster` prompts for confirmation before removing the instance.
- You cannot drop the last instance in the cluster. You must use `drop cluster`.

`drop instance`:

- Removes references to the instance in the interfaces file, the instance entry in the quorum device, and notifies the cluster that the instance has been dropped.
- Removes entries for multiple and single Backup Servers if they were configured for the instance you are dropping.
- Drops XP Server and single or multiple Backup Servers if they have been configured for that instance.

Related Information

[drop cluster \[page 321\]](#)

9.16 drop xpserver

(Cluster Edition only) Drops the XP Server for each instance in the cluster.

Syntax

```
drop xpserver
```

Examples

Drop XP Server

Drops the XP Servers for “mycluster”:

```
drop xpserver  
Are you sure you want to drop the XP Servers from cluster  
mycluster"? {Y or N}: [N] y  
The XP Servers have been dropped for all instances.
```

Usage

Use `drop xpserver` to drop an XP Server from the cluster.

9.17 exit

(Cluster Edition only) Exits the `sybcluster` utility.

Syntax

```
exit
```

Usage

`exit` and `quit` both exit the `sybcluster` utility.

If some agents have been shut down while connected to `sybcluster`, the SAP ASE server may display error messages describing the connections. You can ignore these messages.

Related Information

[quit \[page 326\]](#)

9.18 help

(Cluster Edition only) Lists the currently available `sybcluster` interactive commands.

Syntax

```
help
```

Usage

The list of currently available interactive commands changes depending on whether or not `sybcluster` is connected to a cluster.

9.19 localize

(Cluster Edition only) Displays the current values for default language, charset, and sort order. Allows modification of default values, and addition or removal of languages.

Syntax

```
localize
```

Examples

Display default localization values

Displays default localization values, and then prompts for changes. The default language changes to Chinese, the default charset to `euqgb`, and the default sort order to `bin_euqgb`:

```
localize
Current default locale properties are:
Default Language - portuguese
Default Charset - mac
Default SortOrder - Binary ordering, for use with the Macintosh character
set(mac).
Options for default Language are:
1. spanish
2. portuguese
3. german
4. us_english
5. thai
6. french
7. japanese
8. chinese
9. korean
10. polish
Enter the number representing the language to be set as defaults: [2] 8
Options for default charsets are:
1. gb18030
2. euqgb
3. uttf8
Enter the number representing the charset to be set as default: [1] 2
Options for sort orders are:
1. Binary ordering, for the EUC GB2312-80 character set (euqgb).
Enter the number representing the sort order to be set as default [1]
Do you want to install any language? [Y] n
Do you want to remove any language? [N ]
The cluster mycluster was successfully localized with default
language chinese, charset euqgb, sortorder bin_euqgb
```

Usage

- The current default localization value displays after each prompt. To accept the current value, enter a carriage return instead of a number.
- The options for default languages include all languages present in `$SYBASE_ASE`. If the selected default language is not configured, use `localize` to configure it or remove it.
- To ensure that new values are consistent for all instances in the cluster, restart the cluster after changing localization values.

9.20 quit

(Cluster Edition only) Exits the `sybcluster` utility.

Syntax

```
quit
```

Usage

`exit` and `quit` both exit the `sybcluster` utility.

Related Information

[exit \[page 324\]](#)

9.21 set backupserver

(Cluster Edition only) Changes the listening port number for Backup Server on specified nodes in a cluster.

Syntax

```
set backupserver
```

Examples

Change the listening port number for Backup Server

Changes the listening port number for Backup Server on "blade1" of "mycluster":

```
set backupserver  
Backup Server is configured on the following nodes:  
  1. blade1: 3001  
  2. blade2: 3002  
  3. blade3: 3003  
Do you want to change the Backup Server port on any node? {Y}  
Enter the number representing the node whose port you want to change: 1  
Enter the Backup Server port number for node "blade1":4001  
Backup Server was successfully modified as per new properties.
```

Change the listening port number for one or more Backup Servers

When "mycluster" has been configured for multiple Backup Servers, changes the listening port number for one or more Backup Servers:

```
set backupserver  
Multiple Backup Servers are configured for the cluster. Their configuration  
is as follows:  
Backup Server Policy: Dedicated  
  1. Backup Server name: ase1_BS  
    Configured for blade1:23001  
    Log file location: /remote/sybase/ASE-15_0/install/ase1_BS.log  
  2. Backup Server name: ase2_BS  
    Configured for blade2:23002  
    Log file location: /remote/sybase/ASE-15_0/install/ase2_BS.log  
  3. Backup Server name: ase3_BS  
    Configured for blade3:23003  
    Log file location: /remote/sybase/ASE-15_0/install/ase3_BS.log  
Do you want to edit any Backup Server (y/n)? [Y]  
Enter the number representing the Backup Server you want to edit: [1]  
Enter the new port for Backup Server "ase1_BS":24001  
Do you want to edit any more Backup Servers? [N]  
Backup Server "ase1_BS" successfully updated.
```

Usage

When you set a new listening port number, the SAP ASE server first checks to see if that port number is already in use.

9.22 set cluster

(Cluster Edition only) Changes configuration values for the cluster.

The cluster must be down to execute all `set cluster` commands except `set cluster login`.

Syntax

```
set cluster {
  maxinst <max_num_instances> |
  traceflags <trace_flag>[, <trace_flag>[,...]] |
  traceflags <trace_flag>[, <trace_flag>[,...]] off |
  traceflags off |
  { primary | secondary } protocol udp |
  login <login_name> [password <password> ] }
```

Parameters

maxinst <max_instances>

specifies the maximum number of instances that can run in the cluster.

traceflags <trace_flag>[, <trace_flag>[,...]]

specifies trace flags to be set when the cluster starts.

traceflags <trace_flag>[, <trace_flag>[,...]] off

specifies one or more trace flags to turn off.

traceflags off

turns off all trace flags.

{ primary | secondary } protocol udp

sets the protocol for the private network for the primary or secondary interface.

login <login_name> [password <password>]

specifies a user name and password that the agent uses to log in to the cluster and perform shutdown and certain other tasks.

i Note

You can only use `set cluster login` to change the login or password that the agent uses to log in to the cluster.

Examples

Change the maximum number of instances

Changes the maximum number of instances to 4 for “mycluster”:

```
set cluster maxinst 4
```

Change a trace flag

Changes a trace flag to 15506:

```
set cluster traceflags 15506
```

Turn off a trace flag

Turn off one or more trace flags:

```
set cluster traceflags 15506 off
```

Turn off all trace flags

Turns off all trace flags:

```
set cluster traceflags off
```

Change the password

Changes the password for the “sa” user name:

```
set cluster login sa password abcde
```

Usage

To check that the cluster is down, enter `show cluster status`.

Permissions

The login for `login <login_name> [password <password>]` must have `sa_role`. By default, the agent uses the “sa” login with no password. To change this password, use `set cluster login`.

Related Information

[set cluster \[page 328\]](#)

[show cluster \[page 335\]](#)

9.23 set instance

(Cluster Edition only) Sets properties of the instance. The instance must be down.

Syntax

```
set instance <instance_name>
  {logpath <path> |
  startargs <values> |
  {primary | secondary} port <port_range> |
  {primary | secondary} address <ip_address>}
```

Parameters

logpath <logfile_path>

specifies the path for the instance log file.

<instance_name>

specifies an instance.

startargs <startup_args>

specifies arguments for starting the instance.

{ primary | secondary } address <ip_address>

specifies the primary or secondary IP address for the instance.

{ primary | secondary } port <port_range>

specifies the primary or secondary port range for the instance. The format for <port_range> is <start_num end_num>.

Examples

Change the port range

Changes the port range for the primary interface listening port:

```
set instance primary port 7777
```

i Note

The format for `port_range` is `start_num end_num`. However, `sybcluster` only accepts `start_num` and does not accept `end_num`. `sybcluster` will calculate `end_num` according to `start_num`.

Usage

To check that the instance is down, enter `show cluster status`.

Related Information

[show cluster \[page 335\]](#)

9.24 set xpserver port

(Cluster Edition only) Changes the listening port number for XP Server on specified nodes of the cluster.

Syntax

```
set xpserver port
```

Examples

Example 1

Changes the listening port for the XP Server for instance “ase1” on “blade1” of “mycluster” without changing the listening ports for “ase2” and “ase3”:

```
set xpserver port
```

```
Enter the XP Server port number for instance "ase1" [3002]: 4002
Enter the XP Server port number for instance "ase2" [3002]: <CR>
Enter the XP Server port number for instance "ase3" [3002]: <CR>
```

Usage

You can change the XP Server listening port number on one or more instances.

9.25 show agents

(Cluster Edition only) Displays information about available agents.

Syntax

```
show agents
[ login <login_name> ]
[ password <password> ]
[ agent "<agent_spec>[, <agent_spec>[,...]]" ]
[ discovery "<discovery_spec>[, <discovery_spec>[,...]]" ]
```

Parameters

login <login_name>

is the management agent login.

password <password>

is the management agent password.

agent <agent_spec>

identifies the nodes in the cluster running an agent and the port number that `sybcluster` uses to connect to the agent.

The format is "`<node_name:port_number> [, <node_name>:<port_number>] [, ...]`". The default port number is "9999."

discovery <discovery_spec>

is the discovery method used to identify the agents responsible for the requested cluster.

The format is "`<method>[(<method_specification>)] [, (<method_specification>) [, ...]`". See the description for `sybcluster -d <discovery_list>` for more information about discovery methods.

Examples

Display UAF agent information

```
show agents
Agent Information: service:jmx:rmi:///jndi/rmi://blade1:9985/agent
-----
Node Name:      blade1
Agent Port:     9985
Agent Version:  2.5.0
Agent Build:    977
OS Name:        Linux
OS Version:     2.6.9-42.ELsmp
OS Architecture: amd64
Agent Service Info:
Agent Service (Agent)  Build: 977  Status: running
BootstrapService (BootstrapService)  Build: <unavailable>  Status: running
Configuration Service (ConfigService)  Build: 977  Status: running
Deployment Service (DeploymentService)  Build: <unavailable>  Status: running
Environment Service (EnvironmentDiscoveryService)  Build: 977  Status: running
File Transfer Service (FileTransferService)  Build: 977  Status: running
Plugin Registration Service (PluginRegisterService)  Build: 977  Status:
running
RMI Service (RMIService)  Build: 977  Status: running
Remote Shell Service (RemoteShellService)  Build: 977  Status: running
Security
Service (SecurityService)  Build: 977  Status: running Self Discovery Service
(SelfDiscoveryService)  Build: 977  Status: running Service Registration
Service
(ServiceRegistrationService)  Build: 977  Status: running Session Service
(SessionService)  Build: 977  Status: running Sybase Home Service
(SybaseHomeService)
Build: 14  Status: running
Agent Plugin Info:
ASE Cluster Agent Plugin (com.sybase.ase.cluster) Version: 15.1.0 Build: 85
Instance:
1  Status: running
  Cluster Name: marion
  Env Shell:    /job1/miso/betaR1/SYBASE.sh Shell Type: sh
  Sybase Home:  /job1/miso/betaR1
  ASE Home:     /job1/miso/betaR1/ASE-15_0
  ASE Version:  Adaptive Server Enterprise/15.0.1/EBF 14721 Cluster
Edition/B/x86_64/Enterprise Linux/asecluster3/2360/64-bit/FBO/Fri Jul 20
10:04:16
2007
  ASE Login:    sa
  Update Time:  60 seconds
  Last Update:  2007-09-28 22:09:02 -0700
```

Usage

`show agents` is active before you connect to a cluster.

9.26 show backupserver config

(Cluster Edition only) Displays the nodes on which Backup Server is configured, the associated listening port numbers, and the Backup Server policy.

Syntax

```
show backupserver config
```

Examples

Display configuration information

Displays configuration information for "mycluster," which has been configured for multiple Backup Servers.

```
show backupserver config  
Multiple Backup Servers are configured for cluster. Their configuration is  
as follows:  
Backup Server policy: Dedicated  
1. Backup Server for ase1: ase1_BS  
   Configured on (host:port) - blade1:23001  
2. Backup Server for ase2: ase2_BS  
   Configured on (host:port) - blade2:23002  
3. Backup Server for ase3: ase3_BS  
   Configured on (host:port) - blade3:23003
```

Usage

- Use the `show backupserver config` command to display Backup Server configuration information.
- If you are configuring multiple Backup Servers, `show backupserver config` includes the Backup Server policy.

9.27 show cluster

(Cluster Edition only) Displays configuration, log, and status information about the cluster.

Syntax

```
show cluster
  config
    template
  log
    [errors]
  [minseverity <severity_level>]
  [startdate [<date_string>]]
  [enddate [<date_string>]]
  [last <number_of_lines>]
  status
```

Parameters

status

displays status information for the cluster. Values are:

- Up
- Down
- Undefined
- Invalid
- Start
- Init
- Quiesce

log

displays logs from all instances in the cluster.

errors [minseverity <severity_level>]

display log file entries for errors. (Optional) Limits displayed error entries to a severity level and above.

i Note

Error <severities_level> is an attribute of SAP ASE error messages, not sybcluster messages.

startdate [<date_string>]

display log file entries that occur on and after the date specified. The format for <date_string> is: <mm>:<dd>:<yy>.

If you do not specify a `startdate` or `enddate` `<date_string>`, the default is the current date (today).

enddate [`<date_string>`]

display log file entries that occur on or before the date specified.

last `<num_lines>`

limits the number of lines displayed, counting backward from the last line in the log files.

config

displays configuration information for the cluster:

- Maximum number of instances
- Installation mode: shared or private
- Primary and secondary protocols
- Trace flags set
- Location and name of the quorum device
- LDAP information, if LDAP is configured
- Location and name of the master device

template

displays formatted configuration information for the cluster.

Examples

Display current information

Displays current configuration and other information about the default cluster:

```
show cluster status
-----
Id   Name   Node   State  Heartbeat
-----
1   ase1   blade1 Up      Yes
2   ase2   blade2 Up      Yes
3   ase3   blade3 Down    No
```

Display configuration information for a cluster configured for shared installation mode

Displays configuration information—including LDAP, if it is configured—for the default cluster configured for shared installation mode:

```
show cluster config
**Cluster configuration for "mycluster" **
  Installation Mode shared
  Interfaces Path "/work2/sybase/ASE-15_0/"
  Trace Flags:
    15556
  Maximum Instances "4"
  Quorum "/dev/raw/raw101"
  Master Device
    "/dev/raw/raw102"
  logfile ase1 /work2/sybase/ASE-15_0/install/
    ase1.log
  run_parameters ase1 null
  logfile ase2 /work2/sybase/ASE-15_0/install/
```



```

ase2.log
run_parameters ase2 null
Primary Interconnect "udp"
Server[1]ase1 tigger.sybase.com 26016 26031
Server[2]ase2 christopher.sybase.com 26032 26047
Secondary Interconnect "udp"
Server[1]ase1 tigger.sybase.com 26081 26096
Server[2]ase2 christopher.sybase.com 26097 26112

```

Display configuration information for a cluster configured for private installation mode

Displays configuration information for the default cluster configured for private installation mode:

```

show cluster config
**Cluster configuration for "localcluster" **
Installation Mode "private"
Trace Flags:
There are no trace flags
Maximum Instances "4"
Quorum "/dev/raw/raw101"
Master Device "/dev/raw/raw102"
logfile ase1 /remote/work2/sybase/ASE-15_0/install/ase1.log
run_parameters ase1 null
logfile ase2 /work2/sybase/ASE-15_0/install/ase2.log
run_parameters ase2 null
Primary Interconnect "udp"
Server[1]ase1 tigger.sybase.com 26016 26031
Server[2]ase2 christopher.sybase.com 26032 26047
Secondary Interconnect "udp"
Server[1]ase1 tigger.sybase.com 26081 26096
Server[2]ase2 christopher.sybase.com 26097 26112
LDAP server blade1 2250

```

Usage

`show cluster status` displays the results of a `show instance` command on each instance in the cluster.

Related Information

[show instance \[page 338\]](#)

9.28 show instance

(Cluster Edition only) Displays information about an instance.

Syntax

```
show instance [<instance_name> ] {
  config |
  status |
  log
  [ [ errors ] minseverity <severity_level> ] |
  [ startdate [ <date_string> ] ] |
  [ enddate [ <date_string> ] ] |
  [ last <num_lines> ] }
```

Parameters

<instance_name>

specifies a unique name for an instance in the cluster.

status

displays status information for the instance. Values are:

- Up
- Down
- Undefined
- Invalid
- Start
- Init
- Quiesce

log

displays the instance log.

errors [minseverity <severity_level>]

displays log file entries for errors. (Optional) Limits displayed error entries to a severity level and above.

i Note

Error <severities_level> is an attribute of SAP ASE error messages, not sybcluster messages.

startdate [<date_string>]

displays log file entries that occur on and after the date specified. The format for <date_string> is: mm:dd:yy.

If a `startdate` or `enddate` `<date_string>` is not specified, `<date_string>` defaults to the current day.

enddate [`<date_string>`]

displays log file entries that occur on or before the date specified. The format is: mm:dd:yy.

last `<num_lines>`

Limits the number of lines displayed, counting backwards from the last line in the log file.

Examples

Display information about “ase1”

```
show instance ase1 status
Id      Name      State
-----
1       ase1      Down
```

Display configuration information for “ase1”

```
show instance ase1 config
Instance: ase1 at blade6:25001
Private Primary Network
  Address: blade1
  Port Range: 2541 - 2556
  Sybase home: /sybase/sybase_sdc
  ASE home: /sybase/sybase_sdc/ASE-15_0
  Config file: /sybase/sybase_sdc/ase1.cfg
Private Secondary Network
  Address: blade1
  Port Range: 2557 - 2572
Log Path: /blade1/sybase/
  ASE-15_0/install/mycluster_ase1.log
```

Usage

- `show instance status` displays one of seven different states for the named instance:
 - Down
 - Init
 - Invalid
 - Quiesce
 - Start
 - Undefined
 - Up
- `show instance config` includes this information when the installation mode is private:
 - The `$SYBASE` path

- The ASE path
- The server configuration file path

9.29 show membership mode

(Cluster Edition only) Displays the cluster's current membership mode. Membership mode specifies whether or not Veritas Cluster Integration is supported on the current cluster.

Syntax

```
show membership mode
```

Usage

Values for `show membership mode` are:

- `vcs` – VCS is supported for the current cluster.
- `native` – VCS is not supported for the current cluster.

If the cluster is running in VCS membership mode, make sure you shut down or start up servers and the cluster using VCS shut-down and start-up mechanisms.

9.30 show session

(Cluster Edition only) Displays current discovery and agent information.

Syntax

```
show session
```

Examples

Display agent status information

```
show session
Session information
-----
Sybase sybcluster Command Line Utility/15.0.1/CE GA 2/S/jdk1.4.2/
sybclustermain/129/Mon Aug 13 09:59:51 PDT 2007Connected Cluster:
myclusterDefault Cluster:
  Default Instance:
  Agent Specifications:
    [1]: oddjob:7171
  Discovery Specifications:
  Agent Connections: 1
    Connection[1] URL: rmi://oddjob:7171           Node Name:      oddjob1
    Agent Port:      7171
    Agent Version:   2.5.0
    Agent Build:     980
    OS Name:         Linux
    OS Version:      2.6.9-42.ELsmp
    OS Architecture: amd64
  Agent Service Info:
    Agent Service (Agent) Build:980 Status:running
    BootstrapService (BootstrapService) Build:
      <unavailable> Status: running
    Configuration Service (ConfigService) Build:
      980 Status: running
    Deployment Service (DeploymentService) Build:
      19 Status: running
    Environment Service (EnvironmentDiscoveryService)
      Build: 980 Status: running
    File Transfer Service (FileTransferService)
      Build: 980 Status: running
    Plugin Registration Service
      (PluginRegisterService) Build:980 Status:
      running
    RMI Service (RMIService) Build: 980 Status:
      running
    Remote Shell Service (RemoteShellService) Build:
      980 Status: running
    Security Service (SecurityService) Build: 980
      Status: running
    Self Discovery Service (SelfDiscoveryService)
      Build: 980 Status: running
    Service Registration Service
      (ServiceRegistrationService) Build: 980
      Status: running
    Session Service (SessionService) Build: 980
      Status: running
    Sybase Home Service (SybaseHomeService) Build:
      14 Status: running
  Agent Plugin Info:
  ASE Cluster Agent Plugin(com.sybase.ase.cluster)
    Version: 15.0.1 Build: 129 Instance: 1
    Status: running
  Cluster Name: mycluster
  Env Shell: /oddjob1/work2/
    sybase_sybclustermain_mycluster_vu/SYBASE.sh
  Shell Type: sh
  Sybase Home: /oddjob1/
    work2/sybase_sybclustermain_mycluster_vu
  ASE Home: /oddjob1/work2/
    sybase_sybclustermain_mycluster_vu/ASE-15_0
  ASE Version: Adaptive Server Enterprise/
    15.0.1/EBF 14721 Cluster Edition/B/x86_64/
```

```
Enterprise Linux/asecluster3/2381/64-bit/  
FBO/Mon Nov 12 07:44:23 2007  
ASE Login: sa  
Update time: 300 seconds  
Last Update: 2007-11-13 15:27:39 -0800
```

Usage

Use the `sybcluster show session` command to view information about the current cluster.

9.31 show xpserver

(Cluster Edition only) Displays the XP Server name and listening port number, node name, and instance name configured on each node.

Syntax

```
show xpserver
```

Examples

Display XP Server configuration information

Displays the XP Server name, listening port number, node name, and instance name:

```
show xpserver config  
**XP Server configuration for the cluster**  
-----  
XPServer Name      Port      Host      Node  
-----  
ase1_XP            4010     blade1    ase1  
ase2_XP            4011     blade2    ase2  
ase3_XP            4012     blade3    ase3
```

Usage

Use the `sybcluster show xpserver` command to view information about XP Server.

9.32 shutdown cluster

(Cluster Edition only) Shuts down the cluster by executing a Transact-SQL `shutdown` command for each instance in the cluster's instance list, in the order specified in the cluster configuration file.

Syntax

```
shutdown cluster [nowait]
```

Parameters

nowait

shuts down the cluster immediately, without waiting for transactions or statements currently executing to conclude. By default, `sybcluster` waits for all transactions and statements to execute before shutting down the cluster.

Examples

Shut down the current cluster

```
shutdown cluster
INFO - ...
INFO - 01:00:00000:00117:2007/06/02 00:23:53.56 kernel ueshutdown: exiting
INFO - 01:00:00000:00117:2007/06/02 00:23:53.56 kernel SySAM: Checked in
license for 1 ASE_CORE (2007.1031/31-oct-2007/1293 6876 8FE7 E217).
```

Usage

`sybcluster` prompts for confirmation before shutting down the cluster.

If the cluster is managed by VCS, `shutdown cluster` fails. You must use VCS shut-down mechanisms to shut down the cluster.

9.33 shutdown instance

(Cluster Edition only) Shuts down the instance by executing a Transact-SQL `shutdown` command.

Syntax

```
shutdown instance [<instance_name>] [nowait]
```

Parameters

<instance_name>

is the unique name of an instance in the cluster.

nowait

shuts down the instance immediately, without waiting for currently executing transactions or statements to finish.

Examples

Shut down an instance

Shuts down the instance "ase1," after waiting for currently executing transactions or statements to finish:

```
shutdown instance ase1
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 kernel shutdown server ase1
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 Server SHUTDOWN by request.
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 ASE is terminating this
process
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 shut down local cluster
server.
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 kernel coordinator to be
shutdown, newcoo is 0.
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 kernel Single server cluster.
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 kernel cipcnode_down(): Node
1 down event.
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 server ASE shutdown by
request.
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 kernel ueshutdown: exiting
INFO - 01:00:00000:00113:2007/06/02 00:31:24/14 kernel SySAM: Checked in
license for 1 ASE_CORE (2007.1031.31-oct-2007/1293 6876 8FE7 E 217).
```


Usage

- Shutting down the last instance in a cluster also shuts down the cluster.
- `sybcluster` prompts for confirmation before shutting down the instance.
- If the cluster is managed by VCS, `shutdown instance` fails. You must use VCS shut-down mechanisms to shut down the instance.

9.34 start cluster

(Cluster Edition only) Starts all instances in the cluster.

Syntax

```
start cluster
```

Examples

Start the current cluster

```
start cluster
INFO - [cluster boot log]
...
INFO - 02:00:00000:00002:2007/06/02 00:21:53.56 server 'ase1' (ID=1).
INFO - 02:00:00000:00002:2007/06/02 00:21:53.56 server Master device
      size:
80 megabytes, or 40960 virtual pages.
```

Usage

Connect to the cluster before starting it.

9.35 start instance

(Cluster Edition only) Starts an instance.

Syntax

```
start instance [<instance_name>] [unlock]
```

Parameters

<instance_name>

specifies a unique name for an instance in the cluster.

If you do not enter a cluster name, `sybcluster` uses the instance specified in the `sybcluster` command line or specified with the `use` command.

unlock

removes the lock from a cluster that was terminated unexpectedly. The cluster must be down before using `unlock`.

⚠ Caution

Do not use the `unlock` parameter unless you have verified that all instances in the cluster are shut down.

Usage

The instance must be down to use `start instance unlock`.

9.36 upgrade server

(Cluster Edition only) Upgrades a nonclustered SAP ASE server to the SAP ASE Cluster Edition, and creates a cluster with a single instance.

You can perform the upgrade by answering prompts at the command line or via an input file.

Syntax

```
upgrade server <server_name>
  [ login <login_name> ]
  [ password <password> ]
  [ agent <agent_spec> ]
  [ discovery <discovery_spec> ]
  [ file <input_file_name> ]
  [ checkonly ]
```

Parameters

<server_name>

is the name of the non-clustered SAP ASE server.

login <login_name>

is the management agent login.

password <password>

is the management agent password.

agent <agent_spec>

identifies the agent running on the cluster and the port number that `sybcluster` uses to connect the agent.

When upgrading a non-clustered SAP ASE server, there is only one node. The format for `<agent_spec>` is "`<node_name>:<port_number>`". The default port number is "9999."

discovery <discovery_spec>

is the discovery method used to identify the agents responsible for the requested cluster.

The format is "`<method>[(<method_specification>)]`". See the description for `sybcluster -d <discovery_list>` for more information about discovery methods.

file <file_name>

is the input file containing values required for upgrading the server.

checkonly

performs a check run of the non-clustered SAP ASE server to determine its readiness for upgrade.

Examples

Upgrade "myserver" to the Cluster Edition

```
upgrade server
```

```

Enter the name of the cluster: new_cluster
Enter the existing Sybase installation directory for server myserver:
Enter the name of the subdirectory containing the ASE installation for server
myserver:
Enter the name of the subdirectory containing the OCS installation for server
myserver:
Enter the name of an sa login on server exit: [sa]
Enter a password:
Cluster new_cluster - Enter the maximum number of instances: [4]
Verifying the supplied agent specifications...
  1>tigger 9999 2.5.0 Linux
Enter the number representing the cluster node 1 [1]
Will this cluster be configured using private SYBASE installations? (Y/N)
...

```

The information required to upgrade a server or create a cluster are the same.

Usage

The `upgrade server` command prompts for these values:

- The Sybase installation directory of the non-clustered SAP ASE server.
- The release home directory of the non-clustered SAP ASE server.
- The Open Client home directory of the non-clustered SAP ASE server.
- The installation mode, private or shared.
- If `sybcluster` detects a VCS subsystem, asks if you want to include VCS integration with the cluster.
- If you have not configured LDAP, the path to the interfaces file.
- The name of the first instance in the cluster.
- Other values as required to create a cluster.

The `checkonly` option does not perform any upgrade steps, but instead check the server's readiness for upgrade. Resolve the error conditions `checkonly` finds before performing the upgrade.

See the SAP ASE Cluster Edition installation guide for your platform for upgrade information.

Related Information

[create cluster \[page 312\]](#)

9.37 use

(Cluster Edition only) Specifies the default instance.

Syntax

```
use <instance_name>
```

Usage

The `use` command overrides the instance name specified in the `sybcluster` command line.

10 Migrate Data Using sybmigrate

The `sybmigrate` utility is the migration tool used to migrate data from one server to another.

By default, `sybmigrate` migrates encrypted columns in ciphertext format. This avoids the overhead of decrypting data at the source and encrypting at the target. In some cases, `sybmigrate` chooses the `reencrypt` method of migration, decrypting data at the source and encrypting at the target.

i Note

When migrating from one SAP ASE to another more recent version of SAP ASE, you must specify the size and location of a work database on the target server.

The `sybmigrate` utility:

- Aids users in changing the page sizes of their database applications.
- Provides a manageable and smooth migration process.
- Allows customers to take advantage of the variable page size feature for existing databases with user data, thus realizing the full benefit of SAP ASE versions 12.5 and later.

10.1 What sybmigrate Does

During the set-up portion of the migration process, `sybmigrate` migrates following server data to the target SAP ASE server:

The `sybmigrate` utility can perform or migrate the following:

- Remote servers
- Logins
- Login attributes
- Server roles
- Login roles
- Role attributes
- Users
- Alternate users
- Roles
- Permissions
- Remote logins
- External login attributes
- Timer
- Resource limits
- Replication attributes
- Display level attributes

- User messages in the `master` database
- Java classes in the `master` database
- JAR files in the `master` database
- Proxy objects

During the migration portion of the migration process, `sybmigrate` migrates following database-specific data to the target database:

- Defaults
- User-defined datatypes
- Rules
- User tables
- User table data
- Views
- Triggers
- Indexes
- Stored procedures
- Extended stored procedures
- Users
- Logins
- Roles
- Remote servers
- Database data
 - Users
 - Alternate users
 - Roles
 - Role attributes
 - Permissions
 - User messages
 - Java classes
 - JAR files
- Defaults
- Rules
- User-defined types
- Tables
- Indexes
- Referential constraints
- Views
- Stored procedures
- Triggers

10.2 What sybmigrate Does Not Do

The `sybmigrate` utility does not perform all tasks. Migrate these items manually.

You cannot use the `sybmigrate` utility to migrate or perform the following:

- Migrate/downgrade databases from a higher version level. For example, you cannot use `sybmigrate` to downgrade SAP ASE version 15.7 to an earlier version, such as 15.5.
- Table-level lock promotion attributes
- User-defined thresholds
- Abstract plan definitions maintained in `sysqueryplans`
- All system databases except the `model` database
- Any required database options like cache binding, recovery order, and the associated log I/O size as specified by `sp_logiosize`
- Proxy databases
- Engine groups
- Engine bindings
- Execution classes
- Cache configurations
- Auditing tables and auditing configuration
- Server-wide row-lock promotion settings
- Access rules

i Note

Drop access rules before beginning data migration; they can prevent the Database Owner from accessing all rows in a table, which prevents complete data migration.

- Compiled objects with hidden SQL text
- User-defined segments
- Constraints **are** migrated but when they are bound by name to user-defined message numbers, the bindings must be re-created manually
- Settings for objects such as `ascinserts`, `indextrips`, `oamtrips`, `datatrips`, and `sortbufsize` created using `dbcc tune`
- Device definitions
- SQLJ functions
- Proxy tables for external files
- Audit options and audit events
- Server configuration
- Database suspect threshold
- Recovery orders

10.3 Before You Begin

`sybmigrate` requires JRE 1.4, jConnect™ for JDBC™ 6.0, `ddlgen` components, and Component Integration Services in the source SAP ASE server.

`sybmigrate` is installed as part of the SAP ASE software. For information about how to install SAP ASE, see the installation guide for your platform.

Because `sybmigrate` requires a server-to-server connection, two SAP ASE servers must be running. Make sure that you have the appropriate licenses.

Before you begin the migration process, create databases, devices, and segments on the target SAP ASE server. Server and cache configurations must also be already installed on the target SAP ASE server.

Use `ddlgen` to extract the corresponding scripts from the source SAP ASE server, and modify them as needed before applying them to the target SAP ASE server.

Related Information

[ddlgen \[page 62\]](#)

10.3.1 Permissions

The System Administrator login is needed for the setup portion of the migration process using the `-m setup` option. For the remainder of the process, the login must have “sa_role” and “sso_role” privileges to run `sybmigrate`. If you want any user other than the sa to use `sybmigrate`, set the `cis_rpc` handling configuration parameter to “1”.

10.3.1.1 Changing Target Login Accounts

Once you have migrated between different platforms, login passwords are not compatible. However, `sybmigrate` allows you to change the password on target SAP ASE server login accounts during the setup session of the migration process in either of two ways.

- Let `sybmigrate` generate a password on the target server. `sybmigrate` outputs a list of passwords used during migration after the process is complete.
- Supply a password file that contains user name and password pairs. `sybmigrate` sets these passwords on the target server. Thereafter, the System Administrator must run `alter login` to create a new password for each login not included in the password file.

i Note

After the migration process is complete, the System Administrator must change passwords manually on the target SAP ASE server. Passwords are created for new logins using `create login` and `alter login` for each login not reset during the migration process.

In addition to the changing password options, `sybmigrate` also allows you to lock and unlock target SAP ASE server accounts. This option is provided so that the System Administrator can block a user from logging into the target SAP ASE server during the migration process.

10.3.2 Platforms

`sybmigrate` works on both UNIX and Windows platforms.

- For UNIX, the executable file is located in `$SYBASE/$SYBASE_ASE/bin/sybmigrate`.
- For Windows, the executable file is located in `%SYBASE%\%SYBASE_ASE%\bin\sybmigrate.bat`.

10.3.3 Environment Settings

These environment variables must be set correctly. With the exception of `SYBMIGRATE_MEMORY`, these environment variables are defined in the `SYBASE.csh` or `SYBASE.sh` files that are created during the installation process.

Environment Variable	Description
<code>SYBASE</code>	Defines the location of the Sybase release path.
<code>SYBASE_ASE</code>	Defines the location of the SAP ASE component directory.
<code>SYBASE_JRE</code>	Defines the location of the Java runtime environment. This is generally set to <code>\$SYBASE/shared/jre-1_4</code> in the SAP ASE release area. This environment variable overrides <code>JAVA_HOME</code> . <code>SYBASE_JRE</code> defaults to <code>\$SYBASE/shared/jre142</code> (UNIX) and <code>%SYBASE%\Shared\Sun\jre142</code> (Windows).
<code>SYBMIGRATE_MEMORY</code>	Specifies the amount of memory to be used when invoking the Java virtual machine (JVM). This environment variable should be specified with a number, which refers to the amount of memory in megabytes. If <code>SYBMIGRATE_MEMORY</code> is not set, JVM uses the default memory setting of 512MB.

10.3.4 Migrating Proxy Tables

`sybmigrate` supports the migration of proxy tables. If you are planning to migrate proxy tables, you should do the following before you begin migration.

- Make sure that the remote servers involved in proxy table definitions is present in the target server interface file.

- In order to verify the DDL execution time, the remote server has to be accessible when the migration is performed.

10.4 Migration process

The goal of `sybmigrate` is to provide a means to migrate all objects and user data that exist on the source Adaptive Server. However, when migration takes place, there is some server-wide data that needs to be migrated before any user data or user objects can be migrated to individual databases.

The hierarchy of objects dictates the order in which objects are re-created. Generally, server-wide objects from the `master` database are created first. Independent objects like default languages and character are migrated to the target server before data from individual databases.

10.4.1 Overview of the Migration Process

The migration procedure consists of configuring the source and target SAP ASE servers, setting up the migration paths, migrating objects, and validating the migrated objects.

The setup session establishes the migration paths from the source database to the target database. The setup creates the repository database and the work databases, and registers the option to migrate the server data. The setup session can only be executed by an “sa” login.

The migrate session is used to migrate objects and data from the source database to the target database.

The validate session validates the migrated objects. Validation ensures the integrity of data and objects that have been successfully migrated from the source database to the target database.

`sybmigrate` does not migrate an archive database if an entire installation is being migrated.

`sybmigrate` migrates an archive database only if the archive database is specifically selected for migration. When you migrate an archive database to a target server, `sybmigrate` automatically creates a traditional database—rather than an archive database—on the target server.

10.4.2 Pre-migration Considerations

You must have the source SAP ASE server and the target SAP ASE server running concurrently when you migrate data from one to the other.

`sybmigrate` assumes that the target SAP ASE server has been installed and configured prior to data migration. Use `srvbuild` or `syconfig` to create a new SAP ASE server with the required logical page size.

Keep the following items in mind prior to migration, when you are creating the target SAP ASE server and configuring the source SAP ASE server:

- `sybmigrate` requires `allow resource limits` to be set to 0.

- If metadata already exists on the target server, you cannot migrate server data.
- When you create a new SAP ASE server with a different logical page size into which you want to migrate data, you must adequately adjust the size of the database on the target SAP ASE server to accommodate the inbound data. If you are migrating data to an SAP ASE server with a larger logical page size, this is especially important.
Use the space estimation report, `space_est`, to determine how much space is available on your target database.
- To speed the migration process, you can run multiple sessions of `sybmigrate` within the same server. However, running more than one session of `sybmigrate` on the same source and target database path is not allowed.
- You must manually create segments on the target database before migrating tables and indexes.
- The data transfer rate for `sybmigrate` is configured through `CIS bulk insert array size`. The default configuration for `CIS bulk insert array size` is 50 rows. This means that as many as 50 rows of data are buffered by CIS before being transferred to the target SAP ASE server.
To increase throughput, increase the configuration of `CIS bulk insert array size` to a larger value. However, increasing `CIS bulk insert array size` causes the source SAP ASE server to use memory from the operating system for local buffers. This can lead to excessive consumption of operating system memory.
SAP recommends that if you do choose to increase the `CIS bulk insert array size` default value, you do so modestly. See the CIS documentation for more information.
- `CIS bulk insert array size` has no effect on data throughput if the table being transferred has a `text`, `image`, or `Java ADT` column. When a table has a `text`, `image`, or `Java ADT` column in it, all data is migrated one row at a time, for the duration of the migration of that particular table. Also, no array buffering takes place.
- As the data migration is being done using `CIS bulk transfer`, the value for the configuration parameter `CIS packet size` on the source SAP ASE server can affect the speed of the data transfer. The recommended value for `CIS packet size` on the source SAP ASE server is the logical page size (2K, 4K, 8K, or 16K) of the target SAP ASE server.
- `max packet size` allowed on the target SAP ASE server should match the value of `CIS packet size` on the source SAP ASE server.
For more information on `max packet size` allowed, see the *System Administration Guide*.
- To maximize the performance of `sybmigrate`, increase the `additional network memory` configuration parameter on the target SAP ASE server to a value larger than the default.
For more information on `additional network memory`, see the *System Administration Guide*.
- All the above considerations affect the `max memory` configuration parameter. Before migrating your data, make sure that `max memory` is set to a sufficiently large value.
- There are three types of data that are migrated: server data, database data, and user objects. To migrate metadata (the server and database data), the target SAP ASE server must be newly installed so that the migrated metadata does not conflict with any residual data from previous usage.
If you are migrating only user objects, you can use a previously used SAP ASE server. For user data however, the target tables must be empty.
- Before migrating data, create the databases into which you want to migrate data on the target SAP ASE server. The databases should have the same name that they have on the source SAP ASE server.
- To enable conversion of character sets that do not have an internal SAP ASE conversion routine, configure the target SAP ASE server with `enable unicode conversions` set to 1.
- Determine the size of the named caches and buffer pools on the target SAP ASE server. `sybmigrate` does not migrate cache configurations. You can use the information that is generated by `ddlgen` and apply it to

the target SAP ASE server, or you can choose to configure larger amounts of memory, in light of the larger page size being used.

However, `sybmigrate` migrates cache bindings, therefore if the required cache is not in the target SAP ASE server, warnings are generated in the migration log.

- Before running `sybmigrate`, you must install the desired languages on the target SAP ASE server. The default language should be the same on the source and the target SAP ASE server. If there are user messages on the source SAP ASE server that are not installed on the target SAP ASE server, `sybmigrate` aborts user message migration and reports an error.
- If you are migrating Java columns, you must enable Java on the source and target SAP ASE server prior to migration. Enter:

```
sp_configure 'enable java', 1
```

- To complete the migration, the source and target SAP ASE servers must have different local server names. Set the local server name, and then restart the servers for the change to take effect.
- To migrate an SAP ASE server using single-byte character sets to an SAP ASE server using multibyte character sets (utf8):
 1. Use `sybmigrate` to migrate to a server using the same, single-byte character set.
 2. Change the character set to multibyte after migration is complete.`sybcluster` cannot migrate data directly from an SAP ASE server using single-byte character sets to an SAP ASE server using multibyte character sets.

Related Information

[sybmigrate \[page 191\]](#)

10.4.3 Configuration and Tuning for Higher Performance

Depending upon your server resources, you can configure `sybmigrate` and the SAP ASE server for optimal performance.

Copy threads and create index threads are used to migrate tables and re-create indexes. When you are configuring `sybmigrate` during setup mode, the values of `COPY_THREADS` and `INDEX_THREADS` can increase the speed at which `sybmigrate` copies and migrates data.

The number of copy threads controls the number of tables for which data migration is done simultaneously. One copy thread is assigned to each table. When the thread has successfully completed one task, it moves on to another. Depending upon the size of your database and the resources for your SAP ASE server, you can increase the number of copy threads used during the migration process to improve performance.

i Note

When you are migrating a large number of objects in parallel, check the value of `SYBMIGRATE_MEMORY` to verify that there is sufficient memory allocated to `sybmigrate`.

Index threads control the number of threads used to re-create indexes on the target SAP ASE tables. One thread per table is used to re-create the indexes. Once the indexes have been re-created on a table, the thread

proceeds to the next successfully migrated table. Any threads without a task exits. The number of create index threads is expected to be substantially smaller than the number of copy threads.

If you configure INDEX_THREADS to a large number, be sure that the target SAP ASE server is also configured with a large number of sort buffers. The use of index threads takes up space in the target database, so make sure that the target database is configured with adequate space for the designated number of index threads. Also, you must configure the target database with extra space if you are going to be re-creating clustered indexes.

10.4.3.1 Configuration Considerations for SAP ASE

There are several configuration parameters on both the source and target SAP ASE server that affect the performance of the migration process.

Configuration parameters that affect the source SAP ASE server:

Parameter	Description
<code>cis packet size</code>	Should be equal to <code>max page size</code> of the target SAP ASE server.
<code>number of user connections</code>	Should be high enough to accommodate the migration of multiple tables simultaneously according to the value of COPY_THREADS and INDEX_THREADS.
<code>max parallel degree</code>	Should be set to a value that is larger than the largest number of partitions in a single table. Data migration is done in parallel, and if <code>max parallel degree</code> is not set to a value large enough to accommodate the partitioned tables, the tables do not migrate.
<code>number of worker processes</code>	Data migration for partitioned tables requires one worker thread per partition. Therefore, if <code><t></code> partitioned tables with <code><p></code> partitions each are migrating simultaneously, configure a total of <code><t >multiplied by <p></code> worker threads on the source SAP ASE server.
<code>cis bulk insert batch size</code>	Controls the number of rows after which the data transfer transaction is committed. The default value is 0. Using the default value is the safest way to ensure data integrity while migrating data, but it can result in a large number of page and row locks on the source SAP ASE server. To reduce the number of locks, increase this value. If you increase the value of <code>cis bulk insert batch size</code> , only a partial data migration completes if an error occurs during the process. In this situation, manually truncate the target table and restart <code>sybmigrate</code> .
<code>cis bulk insert array size</code>	Controls the number of rows that are copied in bulk at one time. The default is 50 rows per batch. For faster data migration, increase this value. If the table contains <code>text</code> or <code>image</code> columns, the data is transferred one row at a time, regardless of the value for <code>cis bulk insert array size</code> .

The following configuration parameters on the target SAP ASE server affect the performance of `sybmigrate`:

Parameter	Description
<code>max network packet size</code>	Should be set to a value that is at least equal to <code>max page size</code> .

Parameter	Description
<code>number of user connections</code>	Should be set to accommodate the migration of multiple tables in parallel and partitioned tables. For parallel data transfer for partitioned tables, worker processes are required on the source SAP ASE server, but user connections are required on the target SAP ASE server. If you are migrating partitioned tables, set the <code>number of user connections</code> on the target SAP ASE server to the same value as <code>number of worker processes</code> on the source SAP ASE server.
<code>number of sort buffers</code>	The default value of 500 is sufficient during the migration process. You can increase this value when <code>sybmigrate</code> rebuilds the indexes, especially if you are migrating indexes on partitioned tables.

10.4.4 Possible Errors to Avoid

Before beginning the data migration process, `sybmigrate` checks for the following error conditions. If any of these conditions are detected, the migration procedure is aborted.

- A target table with existing data – any attempt to migrate data to a table that already contains data results in the failure of `sybmigrate`.
- A target table with existing indexes – the presence of indexes on a target table causes `sybmigrate` to operate in slow `bcp`. Manually drop all indexes before you begin the data migration.
- Unmatching numbers of partitions on the source and target tables – if the number of partitions on the source and target table do not match, the attempt to migrate data fails. `sybmigrate` only migrates data; it does not redistribute it across partitions.

10.4.5 Auto-select Dependent Objects for Migration

When you use the auto-select feature, `sybmigrate` selects dependent objects for migration.

We recommend that you use the auto-select feature for a successful migration because it checks for the existence of dependent objects, and automatically migrates them to the target SAP ASE server.

10.4.6 Migrating an Archive Database

`sybmigrate` does not migrate an archive database if an entire installation is being migrated.

`sybmigrate` migrates an archive database only if the archive database is specifically selected for migration. When you migrate an archive database to a target server, `sybmigrate` automatically creates a traditional database—rather than an archive database—on the target server.

10.4.6.1 Upgrading an SAP ASE Server with an Archive Database

You cannot upgrade an archive database. If you load a database dump from an older version of SAP ASE onto an archive database hosted on a newer version of SAP ASE, the database is not internally upgraded when you execute `online database`.

If you upgrade an SAP ASE server containing an archive database, all the databases except the archive databases are upgraded. The archive database remains on the older version of SAP ASE server.

SAP recommends you reload the archive database with a dump generated from an already upgraded database.

For more information about upgrading SAP ASE, see the installation guide for your platform.

10.4.6.2 Downgrading an SAP ASE Server with an Archive Database

When you are downgrading to a version of SAP ASE that does not support archive databases, be aware of the following:

- If you must downgrade an SAP ASE server containing an archive database to a version of SAP ASE that does not support archive databases, SAP recommends you drop the archive database before you downgrade.
You need not eliminate the recently added `sysaltusages` table before you perform your downgrade, as long as you do not drop the scratch database. If you want to eliminate `sysaltusages`, however, you must drop the scratch database before you perform the downgrade procedure.
- Backup Server versions 15.0 ESD #2 and later writes a format for compression (`with compression = <compression_level>`) so that the dump can be loaded into an archive database. Therefore, if you must load a compressed dump onto a version of SAP ASE that does not support archive databases access, use the same version of Backup Server that created the compressed dump to load the compressed database dump. An earlier version of Backup Server does not support the new format of the compressed database dump.

When you are downgrading without compression, you need not worry about Backup Server at all.

10.4.7 GUI Mode

You can use either the GUI or the resource file mode for the migration process. You can also elect to run parts of the migration process in GUI mode, and parts of it in resource file mode.

When you run `sybmigrate`, there are three phases of the migration process that you must follow: setup, migrate, and validate.

10.4.7.1 Setting Up Source Databases for Migration

Before migrating data, indicate your source and target SAP ASE servers and register the paths between the source and target databases they contain.

Context

To do this, start `sybmigrate` with the `-m setup` command line option, or by selecting “Setup source databases for migration” when you are prompted in the Session Type window.

Procedure

1. The Connect to ASE window allows you to designate the source and the target SAP ASE servers for your migration process.
 - Choose from the drop-down menu in the Server fields. The menus provide a list of SAP ASE servers that are located in the default `interfaces` file (`$SYBASE/interfaces` on UNIX or `%SYBASE%\ini\sql.ini` on Windows) or in the `interfaces` file that you specify with the `-I` command line argument.
 - If you are not using the `interfaces` file, you cannot use the `-I` command line argument; you must specify the source and the target SAP ASE servers in the `<host>:<port>` format.
 - During the setup phase, you must be logged in to the servers as a System Administrator. Enter “sa” into the Login field, enter your password, and select Connect.

i Note

You can run only one session of `sybmigrate` at a time. Therefore, if there is another user running `sybmigrate` on the same source and target SAP ASE servers, you see the error message “Setup session lock: Either previous setup exit abnormal or there is another setup session running. Do you want to override?” You can override the session lock because it is possible that the previous session may have crashed or quit prematurely.

Before proceeding with the setup and migration process, verify that there are no other users running `sybmigrate`. If there is more than one user running `sybmigrate` simultaneously, Sybase cannot guarantee data integrity.

2. The Session Type window prompts you to select the type of operation you want to perform. Choose from:
 - Setup source databases for migration
 - Migrate database objects and data
 - Validate the migrated objects and data
 - Reports – when you select Reports, a Reports type window displays. You can choose from `status`, `space_est`, `repl`, `diff`, or `password`. When you select either the space estimation or the replication report, a Report Paths Window prompts you to select the database paths on which to run the reports. The Password, Status, and Replications reports are disabled if the setup session has not been completed between the source and target SAP ASE servers.

If you started `sybmigrate` with the `-m` option specifying `setup`, `migrate`, `validate`, or `reports` you do not see this window.

- Use the Setup wizard to prepare databases for migration. The Setup wizard displays several windows:

Option	Description
Choose Database	<p>This window prompts you to select the source and target databases located within your source and target SAP ASE servers, so that <code>sybmigrate</code> knows where to put the data from the source SAP ASE server in the target SAP ASE server.</p> <div style="background-color: #f0f0f0; padding: 5px; border: 1px solid #ccc;"> <p>i Note The source and target databases must have identical names.</p> </div> <p>The Source Database drop-down lists the databases in your source SAP ASE server.</p> <p>The Target Database drop-down lists the databases available in the target SAP ASE server. <code>sybmigrate</code> requires that you create the databases in the target SAP ASE server before beginning the migration process.</p> <p>The migration path is a selected source and target database pair.</p>
Configure DDL threads	<p>Choose the number of threads you use to create database objects on the target server for the specified migration path.</p>
Configure copy threads	<p>Choose the number of threads you use to copy data from the source to the target for the migration path. Make sure you use sufficient numbers of threads for systems with multiple engines.</p>
Configure index threads	<p>Choose the number of threads you use to create indexes on the target server for the specified migration path. Make sure that you use sufficient numbers of threads for systems with multiple engines.</p> <p>You control the number of threads used for parallel table transfer. When several tables are transferred concurrently, each table requires a one-server-to-one-server CIS connection.</p> <p>For example, if the data migration is performed on unpartitioned tables (each table contains a single partition) when you migrate such tables, a single server-to-server connection is established, which uses a single user connection on the source SAP ASE server and a single user connection on the target SAP ASE server.</p> <p>If you migrate data on <code><n></code>-way partitioned tables, the data transfer is performed in parallel with an <code><n></code>-way degree of parallelism. This requires <code><n></code> worker processes on the source server and <code>2<n></code> user connections on the target server.</p> <p>For example, suppose you have 10 <code><n></code>-way partitioned tables to migrate. You use four threads in <code>sybmigrate</code>, and configure the source SAP ASE server to have at least four worker processes and eight user connections. You must configure the target SAP ASE server to have at least eight user connections.</p> <div style="background-color: #f0f0f0; padding: 5px; border: 1px solid #ccc;"> <p>i Note The value you assign to each property in the setup session becomes the default value. You can temporarily override default values in the migrate or validate session. Limit these values to the resources available to the SAP ASE server.</p> </div>

Option	Description
Configuring the work database	<p><code>sybmigrate</code> requires at least one work database during the migration process. The Database size field provides a default value in megabytes. The default value is based on the number of copy and create index threads specified in a previous window. The default is the minimum value; you can increase but not decrease it.</p> <p>The Device field lets you indicate the device on which to create the work database.</p> <div style="border: 1px solid #ccc; background-color: #f0f0f0; padding: 5px;"> <p>i Note</p> <p>When migrating from a source SAP ASE version 12.0 through 12.5.0, <code>sybmigrate</code> also requires a work database on the target server. The wizard prompts for the same information for the target work database.</p> </div>
Current paths	<p>Review the migration paths you have selected. Right-click a migration path to display edit and delete options.</p> <p>You can add paths by selecting <i>Add Migration Path</i>. To add paths later on, rerun <code>sybmigrate</code> in Setup mode.</p>
Configure repository	<p><code>sybmigrate</code> creates a repository database on the source server to track the migration of all migration paths. The default database size is a minimum; you can increase but not decrease it.</p>
Migration of server-wide data	<p>You can choose whether or not to migrate information in system catalogs, such as login information. The options are:</p> <ul style="list-style-type: none"> ○ Yes – server-wide data is migrated at the end of the Setup phase. ○ No – server-wide data is not migrated. You can return to this window and choose to migrate data at any time—as long as database migration has not yet begun. ○ Undecided – allows you to return and choose another migration option later on. However, you cannot begin the Migration phase until you have chosen Yes or No. Undecided is useful when you want to set up the migration process, but plan to migrate data at a later date. <p>If the target server already has been configured for logins or other server-wide information, <code>sybmigrate</code> defaults this option to No.</p> <p>The Options button provides advanced options for handling login accounts. The options let you specify:</p> <ul style="list-style-type: none"> ○ Whether or not to lock login accounts after migration ○ How to handle login passwords when migrating across platforms <ul style="list-style-type: none"> ○ No change – use when migrating to the same platform (default) ○ Generate random passwords ○ Assign passwords from a list in a file
Summary	<p>Displays a summary of options chosen. Click Finish to perform the chosen setup tasks.</p>

4. The Setup Progress window displays the progress of the setup phase.

During this time, `sybmigrate` is creating the repository database, installing the database schema, creating a working database for each selected path, and migrating the server data based on your selection, in that order. If you are running `sybmigrate` in setup mode a subsequent time, it is creating new paths for data migration. If you do not want to create new paths, there is no reason to run `sybmigrate` through the setup mode more than once.

You can view the progress in the log by clicking Show Log. The completion of the setup process is indicated when the Current Task window displays DONE, and when the log shows SETUP_COMPLETE. Click Close to exit the log and the Setup Progress window.

5. You return to the Connect to ASE window. Select Quit to exit `sybmigrate`. To begin the migration phase of the data migration process, exit `sybmigrate` and restart it in the migrate mode.

10.4.7.2 Begin the Migration

After you have completed setup, you are ready to begin migrating.

Context

Restart `sybmigrate` with the `-m migrate` command line option, or choose the migrate database objects and data option from the GUI window.

Procedure

1. In the Connect to ASE window, select the source and target SAP ASE servers to which you want to connect.
2. If you have not started `sybmigrate` with the `-m migrate` command line argument, select the session type in the Session Type window.
3. The Object Selection window allows you to choose what types of database data you want to migrate.

In the Object Selection window, you can set the Copy thread, create index thread, and work thread parameters from the Setting menu bar.

In the Object Selection window, you can also request that `sybmigrate` Auto-Select Dependent Objects on your selected objects by right clicking the object tree node.

When you expand the database data folder, there is a file for each path that you created during setup. Each file allows you to select the data you want to migrate for that particular database. You can choose from the following:

- Database Data

i Note

If you choose to migrate database data, you must migrate all of it. If you deselect parts of the database data, you see an error message asking you whether or not you want to migrate database data.

If you do not migrate the server data during setup, the Database Data selection is disabled.

- Defaults
- Rules

- User-defined Datatypes
- Tables
- Indexes
- Referential Constraints
- Views
- Stored Procedures
- Triggers

The Status field for these objects indicates whether or not the data has successfully migrated. “Success” indicates that the data has already migrated. “Initial” means that the migration has not yet begun. If you find an error in the data that has been migrated, you can reset the Status field to Initial so that the data migrates again. The validation process acts only on those objects that have been migrated successfully, so to begin the validation process without all of the data having successfully migrated, reset the Status field to Success. “Work in Progress” means that the object was selected for migration, but that the migration was not attempted because there was some error causing `sybmigrate` to exit abnormally.

You can see whether or not the server data has been selected to be migrated, but this is for informational purposes only since the server data has already been migrated at this point in the migration process.

When you have selected the data that you want to migrate, click Migrate.

10.4.7.3 Validating the Migration

The validation phase is the same as the migrate phase.

Procedure

The windows ask you to indicate the same information, but rather than selecting data for migration, you are selecting data for validation.

You can validate only those objects that have successfully been migrated.

10.4.7.4 Migration and Validation Progress

`sybmigrate` keeps you informed of the migration and validation progress on the Migration/validation screen. It shows migration progress, messages reported, and a summary count of objects pending, failed, and succeeded for each task type.

You can select *Cancel* at any time, which starts a graceful shutdown of the execution progress.

10.4.8 Resource File Mode

Make these changes to the resource file mode:

Context

- `data_copy_thread`, `create_index_thread`, and `work_thread` attributes are recognized in the setup, migration, and validate sessions of `sybmigrate`. In the setup session, these values are recorded in the repository database, and used as default values during the migrate and validate sessions. During the migrate and validate sessions, you can override the default values by specifying a new value.
- `lock_account` is a new login account management feature. `lock_account` tells `sybmigrate` to lock or unlock all accounts on the target SAP ASE server after copying the login information. Valid values are "Yes" and "No", with "Yes" instructing `sybmigrate` to lock the target SAP ASE server accounts. To activate `lock_account`, you must set `migrate_server_data` to "Yes" in the setup session. If the `lock_account` attribute is not set, nothing is done to target login accounts.
- `login_password_file` has been added to support changing the passwords on the target SAP ASE server. In the setup session, `login_password_file` takes the input password file or the value "<generate>". "<generate>" is a special key used to tell `sybmigrate` to generate the passwords instead of reading them from the password file. If this attribute is not set in the resource file during the setup session, there is no change to the target SAP ASE server login passwords. To activate `login_password_file`, you must set `migrate_server_data` to "Yes" in the setup session.
- The password file must be in plain text. The content of this file consists of two columns: the login name column and the password string column. The separator between the columns are tabs and or spaces. Any lines beginning with "#" are comments.
- `auto_select_dependent_objects` is a new value that is available during the migrate and validate sessions. This attribute tells `sybmigrate` to automatically select the dependent objects for migration and validation. The valid values for this attribute are either "Yes" or "No"; "No" is the default.
- If `source_ase`, `source_ase_login`, `source_ase_password`, `target_ase`, `target_ase_login`, and `target_ase_password` attributes are not in the resource file, `sybmigrate` prompts the user for these attributes.
- `referential_constraint_create_list_from_sql` defines a list of foreign keys to migrate. If this parameter is set to <all_objects>, then all foreign keys in the database will be migrated. If the parameter `auto_select_dependent_objects` is also set then any object that depends on the foreign key will be migrated.
When both `referential_constraint_create_list_from_sql` and `table_create_list_from_sql` are set, both provide a list of objects to migrate. The list of foreign keys does not depend on the objects identified for migration by `table_create_list_from_sql`.
- In the database section of the resource file, if you do not specify any objects or SQL, all objects and types are selected.
For example, in the following resource file all object types (default, rule, table, and so on) are migrated from `pubs2` and `pubs3` databases:

```
[server]
source_ase=tho:5002
source_ase_login=sa
source_ase_password=
target_ase=tho:6002
```

```
target_ase_login=sa
target_ase_password=
[database]
source_database_name=pubs2
target_database_name=pubs2
[database]
source_database_name=pubs3
target_database_name=pubs3
```

Resource file mode is a non-interactive mode. The resource file contains all the information required for migration. You can use the resource file mode if you do not have GUI support or if you need to run batch files.

If you do not specify any object type attributes to migrate in the resource file, `sybmigrate` migrates the entire database.

If you do not specify the source or target SAP ASE server login or password in the resource file, `sybmigrate` prompts the user for this information.

Following is the format for the resource file to run `sybmigrate` in noninteractive mode. To create a resource file, type all the values into a file:

```
#
# This is a sample Migration Tool resource file.
# This resource file will migrate objects in pubs2,
# pubs3, and foo databases.
#
#####
# Server wide information
#####
[server]
# "<host name>:<port number>" or just server name.
source_ase=tho:5002
source_ase_login=sa
source_ase_password=
# "<host name>:<port number>" or just server name.
target_ase=tho:6002
target_ase_login=sa
target_ase_password=
# Repository database setup attributes. This is
# required with "setup" mode.
# Repository database size in MB.
repository_database_size=7
# Device used to create the "sybmigrate" database.
repository_device=master
# Migrate server wide data - logins, roles, remote servers, etc...
# valid only with "setup" mode, default is yes
migrate_server_data=yes
# Tell sybmigrate to lock or unlock all login accounts on the
# target Adaptive Server. Valid values are "yes" and "no":
# "yes" to lock and "no" to unlock. This is only valid if
# "migrate_server_data" is set to "yes" and run in "setup" mode.
# If this attribute is not specified, target Adaptive Server login
# accounts are not change.
lock_account=no
# Change target Adaptive Server login passwords. This is only valid
# if "migrate_server_data" is set to "yes" and run in "setup" mode.
# If this attribute is not specified, target Adaptive Server login
# accounts are not change.
# The valid values are "<generate>" and password file.
# "<generate>" instructs sybmigrate to use random passwords.
# Password file instructs sybmigrate to use the passwords from
# this file.
# The content of the password file consists of two columns:
# the login name column and the password string column.
# The separator between the columns are tabs and or spaces.
```

```

login_password_file=<generate>
#####
# Database information
#####
#
# Migrate the "pubs2" database objects
#
[database]
# Specify the source target database to migrate.
source_database_name=pubs2
target_database_name=pubs2
# Migrate database data, valid only if "migrate_server_data"
# was set to "yes" in "setup" mode. This is default to yes.
migrate_database_data=yes
# Work database setup attributes. This is required with "setup" mode.
# Work database size in MB.
work_database_size=5
# Device used to create the work database.
work_database_device=master
# Number of threads use to do user table data copy
data_copy_thread=5
# Number of thread use to create indexes.
create_index_thread=1
# Number of thread use to do ddl migration/validation
work_thread=10
# Automatically select the dependent objects for migration and
# validation. Valid values are "yes" or "no".
auto_select_dependent_objects=yes
#
## Migrate objects
#
# These attributes specify the list of DDL object to
# migrate or validate. User can directly specify the
# list of DDL object or ask Migration tool to query the
# list. Directly specifying the list has the higher
# precedence. The SQL command will ignore if the list
# is given.
#
# Note:
# * The SQL command for the "*_list_from_sql" attributes
# must return column <object name> or columns <user
# name> and <object name>
# * Index type must also specify the table name. For
# example, "<table>.<index name>" for
# "index_create_list" attribute or columns <table>,
# <index name> for "index_create_list_from_sql"
# attribute.
# * Value "<ALL_OBJECTS>" can be used on any of the
# attributes to specify all objects for the type.
# * If none of these attributes are given, all objects
# and data are migrated.
#
user_defined_type_create_list=
id
dbo.tid
default_create_list_from_sql=
select user_name(uid), name from sysobjects
where type = 'D'
rule_create_list=
pub_idrule, title_idrule
table_create_list=
publishers
titles
dbo.authors
dbo.titleauthor
dbo.roysched
stores
dbo.sales

```



```

dbo.salesdetail
dbo.discounts
dbo.au_pix
blurbs
table_migrate_list=
dbo.publishers titles dbo.authors dbo.titleauthor
dbo.roysched
stores dbo.sales dbo.salesdetail dbo.discounts au_pix
dbo.blurbs
index_create_list=
dbo.authors.auidind
dbo.authors.aunmind
publishers.pubind
roysched.titleidind
sales.salesind
salesdetail.titleidind
salesdetail.salesdetailind
titleauthor.taind
titleauthor.auidind
titleauthor.titleidind
titles.titleidind
titles.titleind
trigger_create_list=
deltitle
totalsales_trig
store_procedure_create_list_from_sql=
select name from sysobjects where type = 'P'
view_create_list_from_sql=<ALL_OBJECTS>
referential_constraint_create_list_from_sql=<ALL_OBJECTS>
logical_key_create_list_from_sql=<ALL_OBJECTS>
#####
#
# Migrate the "pubs3" database objects
#
[database]
source_database_name=pubs3
target_database_name=pubs3
# Migrate database data - user, etc.
migrate_database_data=yes
# These two attributes valid only with "setup" mode
work_database_size=5
work_database_device=master
# Number of threads use to do user table data copy
data_copy_thread=5
# Number of thread use to create indexes.
create_index_thread=1
# Number of thread use to do ddl migration/validation
work_thread=10
# Migrate objects
user_defined_type_create_list=<ALL_OBJECTS>
default_create_list=<ALL_OBJECTS>
rule_create_list=<ALL_OBJECTS>
table_create_list=
dbo.authors
publishers
dbo.titles
dbo.roysched
stores
dbo.sales
dbo.store_employees
salesdetail
dbo.titleauthor
dbo.discounts
blurbs
table_migrate_list_from_sql=<ALL_OBJECTS>
index_create_list=<ALL_OBJECTS>
trigger_create_list=<ALL_OBJECTS>
store_procedure_create_list=<ALL_OBJECTS>

```

```

view_create_list=<ALL_OBJECTS>
referential_constraint_create_list_from_sql=<ALL_OBJECTS>
logical_key_create_list_from_sql=<ALL_OBJECTS>
#####
#
# Migrate all the "foo" database objects with default settings.
#
[database]
source_database_name=foo
target_database_name=foo
# Migrate database data - user, etc.
migrate_database_data=yes
# These two attributes valid only with "setup" mode
work_database_size=5
work_database_device=master
# Number of threads use to do user table data copy
data_copy_thread=5
# Number of thread use to create indexes.
create_index_thread=1
# Number of thread use to do ddl migration/validation
work_thread=10

```

10.5 Using sybmigrate with Encrypted Columns

For databases with encrypted columns, `sybmigrate` migrates several things.

Category	Description
The system encryption password	If you specify not to migrate the system encryption password, <code>sybmigrate</code> migrates the encrypted columns using the <code>reencrypt</code> method instead of migrating the ciphertext directly.
Encrypted columns in cipher text format by default	This avoids the overhead of decrypting data at the source and reencrypting it at the target. In some cases, however, <code>sybmigrate</code> chooses the <code>reencrypt</code> method of migration, which does decrypt data at the source and reencrypts it at the target.
The encryption keys	You may select the keys to migrate. <code>sybmigrate</code> automatically selects keys in the current database used to encrypt columns in the same database. If you have selected migration of the system encryption password, <code>sybmigrate</code> migrates the encryption keys using their actual values. The key values from the <code>sysencryptkeys</code> system table have been encrypted using the system encryption password and these are the values that are migrated. If you have not migrated the system encryption password, <code>sybmigrate</code> migrates the keys by name, to avoid migrating keys that will not decrypt correctly at the target. Migrating the key by name causes the key at the target to be created with a different key value from the key at the source.
The data	By default, the data is transferred in its ciphertext form. Ciphertext data can be migrated to a different operating system. Character data requires that the target server uses the same character set as the source.

`sybmigrate` works on a database as a unit of work. If your database on the source server has data encrypted by a key in another database, migrate the key's database first.

`sybmigrate` chooses to reencrypt migrated data when:

- Any keys in the current database are specifically not selected for migration, or already exist in the target server. There is no guarantee that the keys at the target are identical to the keys at the source, so the migrating data must be reencrypted.
- The system password was not selected for migration. When the system password at the target differs from that at the source, the keys cannot be migrated by value. In turn, the data cannot be migrated as ciphertext.
- The user uses the following flag:

```
sybmigrate -T 'ALWAYS_REENCRYPT'
```

Reencrypting data can slow performance. A message to this effect is written to the migration log file when you perform migration with reencryption mode.

To migrate encrypted columns, you must have both `sa_role` and `sso_role` enabled.

10.6 Post-migration Activities

These are additional activities you perform after migration.

Activity	Description
Migrate schema objects, configuration information	<code>sybmigrate</code> supports the migration of only the objects listed elsewhere in this document. Manually migrate other schema objects and configuration information to ensure the target SAP ASE server is fully functional.
Statistics from non-index columns	Statistics for indexes are automatically re-created when you rebuild the indexes. However, <code>sybmigrate</code> does not re-create statistics from non-index columns. Any user-defined step values for index statistics are not retained during migration. To obtain target-server-side statistics similar to the source-server-side statistics, use <code>optdiag</code> to identify the tables with non-index columns that include statistics. Once you have determined which non-index columns include statistics, update the statistics manually.
Messages	Any message requiring user attention preceded by the word “attention” and logged in the migration log.
Status report	Run the object migrations status report to verify that all objects have been migrated.
Clean up source and target servers	When you no longer need to perform additional sessions (such as to validate or to report), clean up the source and target SAP ASE servers. On the source SAP ASE server and target SAP ASE servers: <ul style="list-style-type: none">• Drop the temporary working databases <code>mtpdb\$%</code>.• Drop the repository database <code>sybmigratedb</code>.• Drop all remote servers <code>mtrs\$%</code>.

10.7 Migrate Databases in the Replication Server Domain

The Replication Server domain includes one or more of these types of databases.

- Primary databases
- Replicate databases
- Replication Server System Databases (RSSDs)

i Note

The RSSD stores Replication Server system tables; in addition, it can also be a primary or a replicate database.

You can migrate any of these databases, but the process requires additional steps to ensure success.

10.7.1 Preparing for Migration

Make sure that replication from or into each database is complete before initiating migration.

Context

This means that:

- For a primary database – all changes have been applied to all subscribing databases
- For a replicate database – all changes to which the database subscribes have been applied

i Note

All transactions in the Replication Server inbound and outbound queues must be applied. After migration, there is no way to restore data left in the SAP ASE transaction log.

Procedure

1. Log in to the Replication Server and suspend log transfer. Enter:

```
suspend log transfer from <server>.<database>
```

2. Log in to the SAP ASE server, and shut down the RepAgent. Enter:

```
use <database>  
sp_stop_rep_agent <database>
```

3. Suspend all DSI connections to the replicate database. Log in to the Replication Server and enter:

```
suspend connection to <server.database>
```

4. Put the Replication Server in hibernation mode. Enter:

```
sysadmin hibernate_on, <replication_server>
```

Results

Before starting the migration process, `sybmigrate` records replication information in its log. The information needed to restore the replication information during the postmigration steps can be retrieved from this log.

Related Information

[Postmigration Procedures \[page 373\]](#)

10.7.2 Postmigration Procedures

After migration, restore the replication information in the database. These steps can be generated by the `repl` report.

If the page size changes between the source and target, amend the system tables.

Replication Server identifies all connections by `<server_name>.<database_name>`. After migration, you must change the name of the target server (the server you are migrating to) to that of the source server (the server you are migrating from).

Related Information

[Amending System Tables When the Logical Page Size Changes \[page 375\]](#)

[Restoring Primary Databases \[page 374\]](#)

[Restoring the RSSD \[page 375\]](#)

[Amending System Tables When the Logical Page Size Changes \[page 375\]](#)

10.7.2.1 Restoring Primary Databases

Follow this procedure for all primary databases, including the RSSD, if it is a primary database.

Context

If the page size changes during the migration, you must also alter the `rs_lastcommit` and `rs_threads` system tables.

Procedure

1. If the original primary database had warm standby on, restore the standby status. Enter:

```
sp_reptostandby <database_name>, <status>
```

`sybmigrate` saves the standby status in the migration log of the source database.

2. Increase the generation ID by 1. Enter:

```
dbcc settrunc ("ltm", "gen_id", <gen_id>)
```

You can view the current generation ID in the migration log of the source database.

3. Reset the secondary truncation point:

```
dbcc settrunc ("ltm", "valid")
```

4. Zero the Replication Server locator value for this database. Enter:

```
rs_zeroltm <server>, <database_name>
```

5. If this database is an active connection in a warm standby configuration, rematerialize the standby database by dumping the primary and loading the dumps into the standby. See the Replication Server documentation for instructions.

6. Start the RepAgent on the primary database. Enter:

```
sp_start_rep_agent <database_name>
```

7. Log in to the Replication Server and restart log transfer:

```
resume log transfer from <server>.<database>
```

Related Information

[Amending System Tables When the Logical Page Size Changes \[page 375\]](#)

[Postmigration Procedures \[page 373\]](#)

[Restoring Replicate Databases \[page 376\]](#)

10.7.2.2 Restoring the RSSD

Follow this procedure to restore the RSSD.

Procedure

1. If the RSSD is a primary database, restore the primary databases.
If the page size changes, alter the `rs_lastcommit` and `rs_threads` system tables as instructed.
2. Turn off hibernation for the Replication Server. Log in to Replication Server and enter:

```
sysadmin hibernate_off <replication_server>
```

Related Information

[Restoring Primary Databases \[page 374\]](#)

[Postmigration Procedures \[page 373\]](#)

[Restoring Replicate Databases \[page 376\]](#)

10.7.2.3 Amending System Tables When the Logical Page Size Changes

Follow this procedure for **all** databases in which the page size has changed.

Context

If the logical page size changes during migration, you must alter the `rs_lastcommit` and `rs_threads` system tables to account for the change.

Procedure

1. Alter the `rs_lastcommit` table. Enter:

```
declare @pad8_size integer
declare @alter_cmd varchar(200)
select @pad8_size = (@@maxpagesize / 2)
- (select sum(A.length) from
syscolumns A, sysobjects B
where A.id = B.id
and B.name = 'rs_lastcommit')
+ (select A.length from
syscolumns A, sysobjects B
where A.id = B.id
and B.name = 'rs_lastcommit'
and A.name = 'pad8')
select @alter_cmd = "alter table rs_lastcommit "
+ "modify pad8 char("
+ convert(varchar(100), @pad8_size)
+ ")"
execute (@alter_cmd)
go
```

2. Alter the `rs_threads` table. Enter:

```
declare @pad4_size integer
declare @alter_cmd varchar(200)
select @pad4_size = (@@maxpagesize / 2)
- (select sum(A.length) from
syscolumns A, sysobjects B
where A.id = B.id
and B.name = 'rs_threads')
+ (select A.length from
syscolumns A, sysobjects B
where A.id = B.id
and B.name = 'rs_threads'
and A.name = 'pad4')
select @alter_cmd = "alter table rs_threads "
+ "modify pad4 char("
+ convert(varchar(100), @pad4_size)
+ ")"
execute (@alter_cmd)
go
```

Related Information

[Postmigration Procedures \[page 373\]](#)

[Restoring Replicate Databases \[page 376\]](#)

10.7.2.4 Restoring Replicate Databases

If the page size does not change during migration, there are no postmigration steps necessary for replicate databases.

If the page size does change, amend the system tables. .

Related Information

[Amending System Tables When the Logical Page Size Changes \[page 375\]](#)

[Restoring Primary Databases \[page 374\]](#)

[Restoring the RSSD \[page 375\]](#)

[Amending System Tables When the Logical Page Size Changes \[page 375\]](#)

10.7.2.5 Logs

In the migration tool log, information about replicated objects is preceded by this banner:

```
=== Replication Information for Database 'pdb1' ===
```

This is a sample log file for a primary database named pdb1:

```
sp_reptostandby 'pdb1' is NONE.
```

If the standby status for the database is not NONE, use the standby status as described in the post-migration steps above.

```
sp_config_rep_agent 'pdb1'
```

`sp_config_rep_agent` requests the current RepAgent configuration. The migration tool automatically restores RepAgent configuration, and you can use this log to verify the RepAgent configuration.

Parameter name	Default	Config Value	Run value
priority	5	5	5
fade timeout	30	30	30
scan timeout	15	15	15
retry timeout	60	60	60
rs username	n/a	rs1_user	rs1_user
trace flags	0	8194	8194
batch ltl	true	true	true
rs servername	n/a	rs1	rs1
send buffer size	2k	2k	2k
trace log file	n/a	n/a	n/a
connect database	n/a	pdb1	pdb1
connect dataservert	n/a	pds1	pds1
can batch size	1000	1000	1000
security mechanism	n/a	n/a	n/a
msg integrity	false	false	false
unified login	false	false	false
skip ltl errors	false	false	false
msg origin check	false	false	false
short ltl keywords	false	false	false
msg confidentiality	false	false	false
data limits filter mode	stop	stop	stop
msg replay detection	false	false	false
mutual authentication	false	false	false
send structured oqids	false	false	false
send warm standby xacts	false	false	false
msg out-of-sequence check	false	false	false
skip unsupported features	false	false	false
send maint xacts to replicate	false	false	false
(28 rows affected)			

This is a list of explicitly replicated tables. `sybmigrate` automatically restores the replication status for explicitly replicated tables, and you can use this part of the log to verify the replication status of explicitly replicated tables.

```

sp_setreptable
Name                Repdef Mode
-----
t1                  owner_off
t2                  owner_on
(2 rows affected)

```

This is a list of explicitly replicated stored procedures. The migration tool automatically restores the replication status for explicitly replicated stored procedures, and you can use this part of the log to verify the replication status of explicitly replicated stored procedures.

```

sp_setrepproc
Name                Type          Log Mode
-----
p1                  function     log_sproc
p2                  function     log_current
p3                  table        log_sproc
p4                  table        log_current
(4 rows affected)

```

This is information about the secondary truncation page. You will need the `generation_id` column during the post-migration steps.

```

dbcc gettrunc
secondary_trunc_page  secondary_trunc_state  dbrepstat  generation_id
      database_id      database_name          ltl_version
-----
621                  1                      167        0
      6                      pdb1                   400
(1 row affected)

```

This appears to be a replicated primary database. Make sure the post processing steps for a replicated primary database are performed. Please consult the manuals for the steps that need to be performed.

This is an example log entry if your database is a replicate database.

```

This appears to be a replicate database.
If the pagesize is greater than 2K, make sure the
post processing steps for a replicate database
are performed. Please consult the manuals for the
steps that need to be performed.

```

This is an example log entry for an RSSD database.

```

This appears to be a replication system database
Make sure the post processing steps for a replication system
database are performed. Please consult the manuals for
the steps that need to be performed

```

All three logs can be present for a database, since a database can list the three categories.

10.7.3 Migrating Databases That Support Wide Data

SAP ASE version 12.5 and later can generate data wider than what Replication Server version 12.1 and earlier can handle. If RepAgent passes wide data to Replication Server 12.1 or earlier, Replication Server threads may shut down.

RepAgent communicates with Replication Server using Log Transfer Language (LTL). When the RepAgent connects to Replication Server, it returns an LTL version.

Table 14: Replication Server and LTL versions

Replication Server version	LTL version
12.1 and earlier	< 400
12.5 and later	>= 400

If Replication Server returns an LTL version less than 400, RepAgent uses the setting of the `data_limits filter mode` option to determine how to treat wide data.

You can set the `data_limits filter mode` option using `sp_config_rep_agent`. Values for `data_limits filter mode` are:

- `stop` – RepAgent shuts down when it encounters data too wide for Replication Server to process (the default when the LTL version is less than 400).
- `skip` – RepAgent ignores data too wide for Replication Server to process, and logs an informational message.
- `truncate` – RepAgent truncates wide data so that Replication Server can process it. If the table or stored procedures has more than 250 columns or parameters, only the first 250 columns or parameters are sent. If the column or parameter is wider than 255 bytes, only the first 255 bytes are sent.
- `off` – RepAgent sends wide data to the Replication Server; Replication Server threads may shut down.

This table shows column and width limits for Replication Server 12.1 and earlier and Replication Server 12.5 and later:

Table 15: Replication Server column number and width limits

Property	Replication Server 12.1 and earlier	Replication Server 12.5 and later
Column count	250	65535
Column width	255	65535

10.8 Limitations

When migrating server data, `sybmigrate` requires that the target SAP ASE server catalog contain only default data. Default data on Windows machines is different from UNIX machines. This causes problems when migrating from UNIX to Windows machines.

To successfully migrate from a UNIX machine to a Windows machine, delete the XP Server name and the `mon_user` login on the target Windows machine.

10.8.1 Stopping High Availability

Data migration is not supported while you are in high availability. You must stop high availability before beginning database migration.

Procedure

1. Decouple primary and secondary SAP ASE servers.
2. Migrate primary source SAP ASE server and secondary source SAP ASE server data to the primary target SAP ASE server and secondary target SAP ASE server separately.
3. Configure the target SAP ASE server for high availability.

Caution

The primary and the secondary SAP ASE servers must be configured to the same logical page size to run high availability.

10.8.2 Other Limitations

These are additional limitations for migration.

- `sybmigrate` does not do any special processing for a DTM/XA environment. The status of open transactions and outstanding prepared transactions should be given consideration. If any special handling is required, you must do it manually.
- There is no reliable way for `sybmigrate` to determine the dependency of various objects. `sybmigrate` does not attempt to create an order in which objects are migrated based on their dependencies on other objects. Views can be dependent upon other views, and they will not be re-created if the view on which they are dependent has not yet been migrated. The migration of stored procedures and triggers may not be successful if the data on which they depend has not yet been migrated. Cross-database dependencies mean that you need to coordinate the migration of related objects. If dependencies are within the selected set, `sybmigrate` takes care of those dependencies. However, if dependencies exist outside the selected set, you may need to run `sybmigrate` through migration more than one time. For this reason, you may need to perform some partial retries to successfully complete the data migration.

- SAP ASE versions 12.5.3 and later allow you to specify the size and location of a work database on your target server. When migrating a database or server from a source server with SAP ASE versions 12.0 and later but earlier than 12.5.0.1, you must specify the size and location of a work database on the target server.
- The name of the source and the target databases must be the same. SQL schema generated by `ddlgen` may have objects that must be qualified with the source SAP ASE server name.
- `sybmigrate` does not support any kind of auditing for migration activities.
- When renaming any of the compiled objects (procs, views, rules, defaults) the object name in `syscomments` is not updated. During the migration, the `ddlgen` query the object from `syscomments` with the old name in the text. This old name in the text causes problems for `sybmigrate` during the DDL migration.

10.9 Troubleshooting and Error Messages

This section discusses common errors and how to address them, as well as different error messages and their meaning.

Issue	Description
Objects fail to migrate	<p>Objects often fail to migrate on the first attempt. <code>sybmigrate</code> automatically retries all failed migration attempts. However, if you choose to migrate an object that is dependent upon another object that is not migrated, the migration fails.</p> <p>To prevent failed migration of objects, examine the dependencies of objects that you select for migration. For example, you cannot migrate a trigger if the table on which the trigger is defined is not also migrated. Similarly, views can be created on other views or tables, and if these objects are not migrated, the migration of the view fails.</p>
Starting the database migration process	<p>When you are in the set-up phase of the migration process, you are asked to decide whether or not you want to migrate server data. You must select from <i>Yes</i>, <i>No</i>, or <i>Undecided</i>.</p> <p><i>Undecided</i> provides you with the flexibility of setting up the migration process, but being able to return to the process at a later date that is more convenient for migration. If you select <i>Undecided</i>, you cannot begin the database migration until you indicate whether you want to migrate server data.</p> <p>If you indicate that you do not want to migrate server data during setup, you cannot migrate database data during migration. You can override this limitation in GUI mode.</p>
You see “Connection refused” or “Unable to obtain connection to the server”	<p>There are two possible reasons why you may encounter these error messages.</p> <ul style="list-style-type: none"> • If either the source or the target SAP ASE server is not running, <code>sybmigrate</code> cannot establish a connection. • The <code>number of user connections</code> configuration parameter must be configured to provide sufficient resources on both the source and target SAP ASE servers.

Issue	Description
Source server cannot reach target server	<p>The interfaces file is used to start the source SAP ASE server. Verify that it has an entry that identifies the target SAP ASE server.</p> <p>Verify that your login can access the target SAP ASE server from the source SAP ASE server.</p>
sybmigrate hangs during migration	<p>If <code>sybmigrate</code> hangs during the migration process, check the <code>sybmigrate</code> log in <code>\$(SYBASE/\$(SYBASE_ASE)/init/logs</code> for any errors or exceptions.</p> <p>Also, check your SAP ASE server logs. If the SAP ASE server logs run out of space on the database, increase the database size, and install the <code>sp_threasholdaction</code> stored procedure to do <code>dump tran</code> when the log is full.</p>
Merging two databases	<p>To merge two databases on the source SAP ASE server into one database on the target SAP ASE server, use the following procedure.</p> <ul style="list-style-type: none"> • Set up and migrate the first database. • After migrating the first database, rename the target database so that it has the same name as the second source database. • Set up and migrate the second database.
<p>i Note</p> <p>You cannot migrate the database data for the second database because the users, roles and other database data already exist on the target database. You can still migrate user data.</p>	
Post-migration failure cleanup	<p>If <code>sybmigrate</code> fails unexpectedly, rerun <code>sybmigrate</code> on the areas that failed. If it fails again with no more progress, clean up the source and target SAP ASE servers, and begin migration again. There are actions that you must perform on both the source and target SAP ASE server.</p> <ul style="list-style-type: none"> • Drop the temporary working databases <code>mtpdb\$%</code> and <code>mtcdb\$%</code>. • Drop the repository database <code>sybmigratedb</code>. • Drop all remote servers <code>mtrs\$%</code>. <p>On the target SAP ASE server:</p> <ul style="list-style-type: none"> • If server data was migrated, rebuild the target SAP ASE server with <code>srvbuild</code> or <code>syconfig</code>. • Re-create the target databases.
Remigrating one database	<p>To remigrate a specific database:</p> <ol style="list-style-type: none"> 1. Start <code>sybmigrate</code>. 2. In the Setup Paths window, during the setup session, right-click the migration path you want to redo. 3. Select Delete Migration Path on the pop-up menu. 4. Clean up or remove the migrated data and objects on the target database, or drop and re-create the target database.

Issue	Description
Re-creating an individual object	<p>5. Restart <code>sybmigrate</code> and run it from setup mode.</p> <p>To re-create an individual object:</p> <ol style="list-style-type: none"> 1. In the target SAP ASE server, drop the object you want to re-create. 2. Start <code>sybmigrate</code> in the migration session, and go to the Migrate Object Selection window. Highlight the object you want to create and right-click. 3. From the pop-up menu, select Reset Object to Initial status. 4. Complete the migration process.
You see a connection failure message	<p>If you receive a connection fail error message even though the source and target SAP ASE servers are running, you may be using the wrong character set. When you are using <code>sybmigrate</code>, you must use the default character set. Run <code>sybmigrate</code> with the <code>-J <charset></code> option, to change the character set you are using.</p>
You see "Insufficient memory in JVM shared class"	<p>If you see the following error in the server log, it indicates that you must reconfigure the size of <code>shared class heap</code> configuration parameter to a larger value.</p>
You see "There is not enough memory in the procedure cache"	<pre data-bbox="416 947 1177 1025">01:00000:00036:2002/01/28 14:17:05.63 server Java VM Host: Memory allocation request failed because of insufficient memory in JVM Shared Class.</pre>
You see "There is not enough memory in the procedure cache"	<p>If you see the error message <code>there is not enough memory in the procedure cache</code> during the migration of indexes, use <code>sp_configure procedure cache size</code> to increase the procedure cache.</p>
java.lang related error	<p>If you receive <code>java.lang.NoClassDefFoundError:com/sybase/jdbcx/SybDriver</code> when you are connecting to an SAP ASE server, check to make sure you have <code>jConnect 6.0</code> installed in your <code>\$\$SYBASE</code> directory (<code>\$\$SYBASE/jConnect-6_0</code>).</p>

11 Restore Databases Using `sybrestore`

Use `sybrestore` to restore an SAP ASE database to the time of failure from the most current full database backup dump files.

You can use `sybrestore` restore a database:

- From the most current backup in the dump history.
- From the server integrated with Tivoli Storage Manager (TSM).
- To the same server or to a different target server.
- To different database name, or to a re-created new database on the same server.
- To a new database on a different target server.
- From cumulative dump.
- From a master database corruption.

`sybrestore` offers two modes — interactive and noninteractive — and is supported on both Windows and UNIX platforms.

`sybrestore` also allows applying database attributes via `sp_dboption` when a database is re-created and restored from the dump file.

Noninteractive Mode

To use noninteractive mode:

- Use SAP ASE 15.7 ESD #2 and later.
- The target and source servers must be the same server and the target database to be restored must be the same database as the source.
- You cannot use external dump files.
- Specify the server name, a user name, and the database name. If you do not provide a password, you are prompted to do so when you invoke `sybrestore`.
- (Optional) Specify a dump directory and an interfaces file.

Interactive Mode

In interactive mode, you can specify:

- To restore a master database.
- A different target server than the source server. If the target database you specify does not exist, a new database is automatically created.
- Whether the last transaction is dumped from the source server and loaded on to the target server. If your data device fails and the database is inaccessible, the dump transaction does not truncate the log.

- Whether to drop and re-create the database.
- Whether to use the current dump history files or external dump files.
- The location for the dump transaction.
- Whether to bring the database online immediately after the restore.
- A point in time, within the range of time during which the database is backed up in the dump history files, from which to restore the database.
- To reinitialize and re-create the database devices of an offline database for which the devices are offline. Then restore the re-created database.
- To log output to a file.

i Note

The `sybrestore` utility does not support Secure Sockets Layer (SSL).

11.1 Before You Begin

Perform these tasks before using `sybrestore`.

- To restore a user database, you must be a user with `sa_role` privilege. To work on an offline database that has offline or inactivated devices, you must be a user with `mon_role` and `sa_role`.
- To restore a master database, you must provide a `restoremaster.cfg` configuration file, resource files for building the SAP ASE server and the Backup Server, and dump history files.
- Make sure these environment variables are set correctly:
 - `SYBASE` – the location of the current version of SAP ASE.
 - `SYBASE_ASE` – the location of the SAP ASE component directory.
 - `SYBASE_OCS` – the location of the SAP open client utility directory.
 - `SAP_JRE7` – the location of SAP JRE 1.7.
 - `SYBASE_JRE6` and `SYBASE_JRE7` – the location of JRE 1.6 and JRE 1.7 respectively.

i Note

In SAP ASE 16.0, `SYBASE_JRE6` and `SYBASE_JRE7` are superseded by `SAP_JRE7`.

- SAP ASE and Backup Server must be running for both the target and source servers.
- The `master` database must be available.
- The source database must be connected to the server in a recovered or unrecovered state.
- The log segment of the source database must be available for dumping and then loading back the last transaction logs that have not been dumped.
- Dump history files or external dump files must be available.

`sybrestore` is installed as part of the SAP ASE software. For more information, see the installation guide for your platform. The executable file is located in:

```
$SYBASE/ASE-16_0/bin/
```

11.2 sybrestore Checks

`sybrestore` performs checks in both interactive and noninteractive mode.

- A check is performed to determine the version of SAP ASE. In version 15.7 ESD #2, enhancements called dump configurations were introduced in the dump and load commands. `sybrestore` supports dump configurations in version 15.7 ESD #2 and later. If you are using SAP ASE 15.7 ESD #1 or earlier, you must use external dump files
- Another check determines whether Backup Server is running. The session is terminated if it is not.
- The dumped database and target database are checked for geometry compatibility, which verifies that the database dump can be loaded successfully into the target database.
- A final check determines whether dump history files exist for the database. If there is no such file, `sybrestore` prompts you to provide external dump files.

Related Information

[Compatibility Geometry Check \[page 386\]](#)

11.2.1 Compatibility Geometry Check

A geometry compatibility check verifies whether a database dump can be loaded successfully into the target database.

Checks are performed both interactive and noninteractive modes. The rules that verify this compatibility are:

- The size and the order of the data and log fragments must match. If two or more consecutive fragments are of the same type (data or log), the sizes for these consecutive fragments are combined together by the restore utility before a comparison is done between the dumped database and the target database.
- The size of all fragments before the last fragment for the target database must match exactly with the size of the dumped database. The last fragment of the target database can be bigger than the database that is dumped. There may be extra fragments in the target database after matching all fragments in the dumped database.

11.3 sybrestore Syntax

Start the restore utility by entering `sybrestore` along with a login and server name (or host name and port number). Providing the database name invokes noninteractive mode.

If you do not provide a password, you are prompted to enter one when you execute the command. If the connection to the server fails, an error message is raised. By default, the `$$SYBASE/interfaces` file is used. If you specify an interfaces file, that file is used instead of `$$SYBASE/interfaces`.

The parameters for interactive mode are:

```
sybrestore
-S <server_name> | <host_name>:<port_number>
-U <username>
[-P <password> ]
[-t <[point in time of restore]>]
[-I <interfaces_file> ]
[-J <character_set> ]
[-R Restore from master database corruption ]
[-d <dump_directory> ]
[-s <list system databases except master database >]
[-v <version> ]
[-z <language> ]
[-o Log output]
```

The parameters for noninteractive mode are:

```
sybrestore
-S< server_name> | <host_name>:<port_number>
-U <username>
[-P< password>]
-D< database_name>
[-d< dump_directory>]
[-I< interfaces_file>]
[-o Log output]
```

Related Information

[sybrestore \[page 196\]](#)

11.4 Restoring a Database in Noninteractive Mode

In SAP ASE 15.7 ESD #2 and later, use `sybrestore` in noninteractive mode to restore a database to the time of failure from the most current dump history files.

In noninteractive mode, the dump history files must be available.

The current full database dump files are used, along with either:

- A series of transaction log dumps, if dump transaction is used, or,
- The most recent cumulative dump, if cumulative dump is used. Cumulative dump is supported only in SAP ASE versions later than 15.7 ESD #3.

Start `sybrestore` with the user name, password, server name, and database name options. For example:

```
sybrestore -Usa -P -SaseServer1 -Ddba_db
```

You see the Restore Database wizard, which shows a preview of the SQL to be executed for restoring the database, along with any progress or error messages.

Optionally, you can specify an interfaces file, and a directory for dumping the last transaction log. If you specify a directory for dumping the last transaction log in the `sybrestore` command, it overrides the default location of the dump directory.

A geometry check, which verifies that the database dump can be loaded successfully into the target database is performed. If dump files do not exist or the geometry check fails, the session is terminated.


Related Information

[Compatibility Geometry Check \[page 386\]](#)

11.5 Restoring a Database in Interactive Mode

The interactive command line interface allows single-key entry, plus the Enter key to navigate through each menu.

The `sybrestore` utility menu is hierarchical and allows you to start at different levels in the menu depending on the type of database restore.

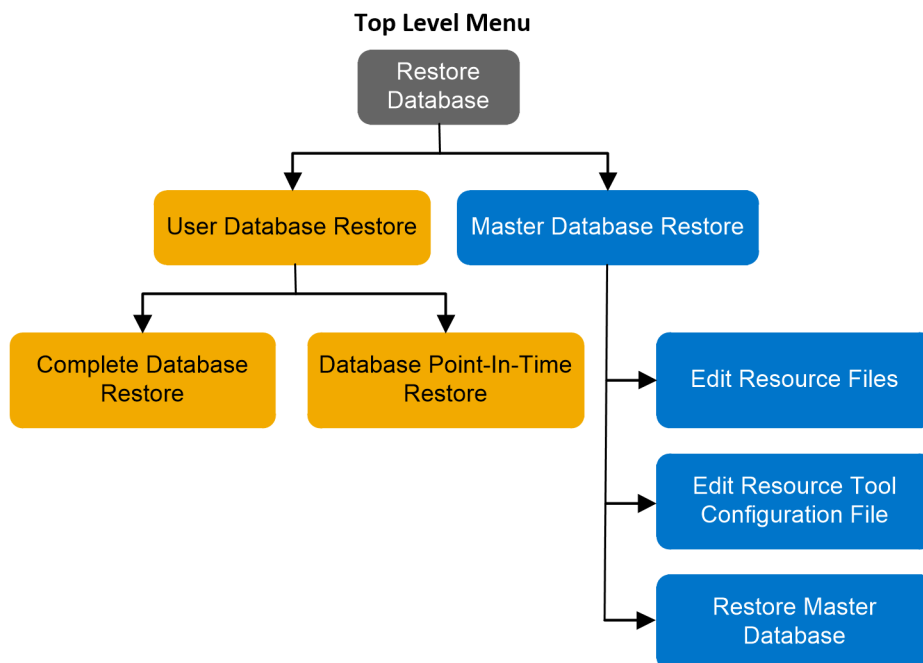

You can navigate down through the levels of the menu and back to the level from which you started. For example, if you start the utility at the top level, you can navigation down and back up to the top menu. However, if you start the utility at a lower level, such as the Complete Database Restore menu, you can only navigate back to that same start level. The Restore Database wizard provides prompts based on the given parameters and the level of at which you start the utility.

Menu Option	Input
	<ul style="list-style-type: none"> • Password. • A mapping directory that maps the mount point of the dump files in the source server to the mount point of the dump files in the target server. • Specify whether the target database has the same name as the source database.
<i>r: Recreate Database</i>	When the input is yes, the database is dropped and re-created using specified devices and device sizes, and log devices and log sizes.
<i>e: Use External Dump</i>	Whether you want to restore the database from dump history files. When the input is no, provide the external backup files to restore the database: <ul style="list-style-type: none"> • The archive directory for the dump database file location and the dump database file name, including respective stripe names. • The dump transaction log file location and multiple dump transaction log file names, including respective stripes names.
<i>i: Point-In-Time</i>	Select the point in time to restore the database.
<i>c: Check Geometry</i>	When the input is yes, you see the comparison between the data size and log size of the device fragments of the dumped database, and the corresponding data size and log size of the device fragments of the target database. This option is provided when dump history files exist and external dump files are not being used to restore the database.
<i>d: Dump Directory</i>	When yes, you can change whether to dump the last transaction of the source database, and changeump directory for dumping the last transaction.
<i>o: Online Database</i>	When yes, the database is brought online after restoring the database.
<i>p: Preview</i>	Shows the SQL statements that will be executed.
<i>Go</i>	Use <i>Go</i> to run all the menus options without having to select menus individually. <i>Go</i> runs all menu options in sequence and then exits. If a menu item has already been executed, for example, if you have already selected a database, you are not prompted again to select a database.

Restore Database Menu

Menu Option	Input
<i>u: User Database Restore</i>	Directs you to the User Database Restore menu. You can choose to go to the Complete Database Restore or Database Point-In-Time Restore wizard.
<i>m: Master Database Restore</i>	Directs you to the Master Database Restore wizard. The interactive wizard provides option selections and prompts to restore master database.

User Database Restore Menu

Menu Option	Input
<i>c: Complete Database Restore</i>	Directs you to the Complete Database Restore wizard. The interactive wizard provides option selections and prompts to restore a user database.
<i>p: Database Point-In-Time Restore</i>	Directs you to the Database Point-In-Time Restore wizard. The interactive wizard provides option selections and prompts to restore a user database to a point in time.

Master Database Restore Menu

Menu Option	Input
<i>e: Edit Resource Files</i>	Directs you to the Edit Resources Files wizard. The resource files are used by the restore utility to build an SAP ASE server.
<i>c: Edit Restore Tool Configuration File</i>	Directs you to the Edit Restore Tool Configuration File wizard. The configuration file contains information about the resource files used to build the SAP ASE server and Backup Server, the SAP ASE configuration file, and the dump history file. On the UNIX platform, there is additional resource file for the XP server and a resource file for the <code>sqlloc</code> utility which is used to set the language, character set, and sort order.
<i>m: Restore Master Database \</i>	Directs you to the Restore Master Database wizard. The interactive wizard provides option selections and prompts to restore master database.

11.5.2 Logging sybrestore Output

Log output of a database restore to a file.

Use the `sybrestore -o` option to log output of a database restore to a file.

For example:

```
sybrestore -Usa -P -SaseServer1 -DmyDataBase -o logData
```

11.5.3 Providing a Mapping Directory

When using the interactive command line to restore a database, you can provide one or more mapping directories.

- If the mounted directory of the target server backup files is the same as the source server, provide an empty mapping directory by leaving the prompt blank.

- If the mounted directory of the target server backup files is not the same as the source server, provide a mapping directory in this form:
/path1>>/path2

Do not use cyclic path entries, as they cannot be resolved. For example:

Mapping	Results in
/path1>>/path2	/path1>>/path1
/path2>>/path1	
/path1>>/path2	/path1>>/path5
/path2>>/path3	/path2>>/path5
/path3>>/path5	/path3>>/path5

11.5.4 Restoring a Database to a Point In Time

Follow these steps to restore a database to a specific point in time.

Procedure

1. In the command window, start `sybrestore`.

```
sybrestore -Usa -P -S<serverName> -t
```

Once the Restore Database wizard starts, you see the Restore Database menu.

```
<<<<<====Restore Database Menu =====>>>>>>
s : Select Database
t : Target Server
r : Recreate Database
i : Point-In-Time
c : Check Geometry
o : Online Database
p : Preview
g : Go
```

2. Enter:

```
g
```

You see a list of available source databases.

3. Select a database by entering the number associated with the database or the name of the database.

You must provide the password for dump files that are password protected.

4. Specify whether the target server to be restored is the same as the source server.

If the target server is not the same as the source server, you are prompted to specify a target server by providing the server name (or hostname:port number), login, and password. You can then provide a mapping directory.

5. Specify whether the name of the target database is the same as the source database.

If the target database name is not the same as the source database name, select a target database.

If the target database does not exist, a database is created, and you must specify devices and devices sizes and log devices and log sizes.

6. Specify whether to drop and re-create the database.

When re-creating the database, you are prompted to specify devices and devices sizes, and log devices and log sizes.

7. The dates and times of the dumped database are given.

First, specify the range of time from which to restore the database. You then see the low and high time ranges. Specify a point in time that falls within the available range.

8. A geometry check is performed. If dump files do not exist or the geometry check fails, the session is terminated.
9. Specify whether to bring the database online after the restore.

You see a preview of the SQL to be executed for restoring the database.

10. Specify whether you want to execute the SQL.

You see any progress or error messages.

Related Information

[Providing a Mapping Directory \[page 392\]](#)

[Compatibility Geometry Check \[page 386\]](#)

[Example of Restoring a Database to a Point In Time \[page 394\]](#)

11.5.4.1 Example of Restoring a Database to a Point In Time

Provided is an example of restoring a database to a point-in-time based on the dump database dates and times.

Table 16: Example of Dump History

Date	Dump time	Type of dump
Aug 14	11:04 AM	database dump
	12:20 PM	transaction dump
	2:20 PM	transaction dump
	7:00 PM	transaction dump

Date	Dump time	Type of dump
Aug 17	9:00 AM	transaction dump
	9:00 AM	transaction dump
	2:16 PM	transaction dump
Aug 23	10:27 AM	database dump
	2:00 PM	transaction dump
	9:30 PM	transaction dump
Sep 28	8:00 AM	transaction dump
	9:00 AM	transaction dump
	12:14 PM	transaction dump

`sybrestore` prompts you to select a range of time based on the database dump history.

For example, based on the information in the above table, you see:

```
1 : [Aug 23 2012 10:27:45:206AM, Sep 28 2012 12:14:50:063PM]
2 : [Aug 14 2012 11:04:58:330AM, Aug 17 2012 2:16:17:206PM]
```

You can select a time range by entering the list number. For example, enter 2 for the time range [Aug 14 2012 11:04:58:330AM, Aug 17 2012 2:16:17:206PM].

Next, enter a time that falls between Aug 14 2012 11:04:58:330AM and Aug 17 2012 2:16:17:206PM. For example, enter:

```
Aug 16 2012 10:00 A.M
```

11.5.5 Restoring User and System Databases

Follow these steps to restore user and system databases, with the exception of the master database.

Procedure

1. Start `sybrestore`:
 - o To restore a user database, enter:

```
sybrestore -Usa -P -S<hostName>:<portNumber>
```

- o To restore both user and system databases, enter:

```
sybrestore -Usa -P -S<hostName>:<portNumber> -s
```


8. Specify whether to dump the last transaction of the source database, provided that:
 - The status of the database is not "for load," or "offline."
 - The database passes the `tran_dumpable_status` check.
9. Use the archive directory as the location of the dump directory, or specify a different location for dumping the transaction.
10. Specify whether to bring the database online after the restore.

You see a preview of the SQL statements to be executed for restoring the database.
11. Specify whether to execute the SQL.

You see any progress or error messages.

Related Information

[Providing a Mapping Directory \[page 392\]](#)

[Compatibility Geometry Check \[page 386\]](#)

11.5.6 Master Database Restore

Restore an SAP ASE master database in the event of a master database corruption.

These functions are performed when restoring a master database.

- The SAP ASE server is rebuilt with `srvbuildres` on UNIX/Linux or `sybatch` on Windows.
- The Backup Server is created using `srvbuildres` on UNIX/Linux platform or `sybatch` on Windows.
- On UNIX/Linux, the language, character set and sort order are configured using `sqllocres`. On Windows, this is done during the rebuild of the server.
- The SAP ASE configuration file and dump history file are restored.
- The master database is loaded from dump files.
- Optionally, you can interactively load other databases after loading the master database.
- If the master database backup is not current or the backing up is missing database devices or a database, you can initiate the `disk reinit` and `disk refit` option.

11.5.6.1 Prerequisites for Restoring a Master Database

To restore the server from master database corruption, resource file, configuration files, dump files, and devices must be available.

i Note

For recovery purpose, it is advised to not create user database on the master device.

Prerequisites

- File systems for the SAP ASE server are available.
- Current dump of the master, system databases, and user databases are available.
- Resource files for building the SAP ASE server and the Backup server are defined.
- Device layouts for the master and system databases are specified in the resource files.
- Database sizes for the master and system databases are specified in the resource files.
- SAP ASE configuration file is available.
- Dump history file is available
- Restore utility `restoremaster.cfg` configuration file must exist in `$$SYBASE/$SYBASE_ASE`.

When restoring the master database, the master database is loaded back from the dump files of the master database. All databases that use the master devices are listed after loading the master database from the dump. You have the option to restore any of these user databases and system databases that are listed.

You must provide information in the `sybrestore` utility `restoremaster.cfg` configuration file. The configuration file contains information about the resource files for building the SAP ASE server and Backup Server. It also contains information about the saved SAP ASE configuration file and the dump history file. If the resource files are not available, you can create them by running `Edit Resource Files` from the `sybrestore` utility.

The resource files for building an SAP ASE server differ for UNIX/Linux platform and the Windows platform. The utility provides options to construct the resource file and to edit the `sybrestore` configuration file.

11.5.6.2 Configuration and Resource Files

When restoring a master database, the restore utility uses the information saved in the master database restore utility `$$SYBASE/$SYBASE_ASE/restoremaster.cfg` configuration file.

In turn, the `restoremaster.cfg` configuration file relies on this information to restore the master database:

- resource file to build the server
- resource file to create the backup server
- resource file to create the XP server (not used for Windows platforms)
- resource file to create languages, character sets and sort order (not used for Windows platforms)
- SAP ASE configuration file
- dump history file

This is an example of restore utility configuration file and the required input files:

i Note

The file names shown are simplified; they can be prefixed with a full path followed by the file name. If a path is not prefixed in the file name, it assumes that the path is `$$SYBASE/$SYBASE_ASE`.

```
# -----  
# Resource files  
# -----  
srv_resource_file=qpamd7.rs  
bsrv_resource_file=qpamd7.bk.rs
```

```
xpsrv_resource_file=
sqlloc_resource_file=qpamd7.sqlloc.rs
# -----
# Adaptive Server configuration file and dumphist file
# -----
original_config_file=qpamd7srv.cfg.sav
original_dumphist_file=dumphist.bak
```

If the `restoremaster.cfg` file does not exist, you can create the file by starting `sybrestore`, selecting Master Database Restore, then selecting `Edit Restore Tool Configuration File`. A sample configuration file is located in the `$$SYBASE/$SYBASE_ASE/sample/server` directory.

If the resource files do not exist, you can create new files from a locally running server or sample resource files. You can also edit existing resource files. To create or edit resource files, start `sybrestore`, select Master Database Restore, then select `Edit Resource Files`.

When initiating *Edit Resource Files*, these options are available:

File Availability	sybrestore Options
The configuration file and resource files are available.	<code>sybrestore</code> defaults to the resource files indicated in the existing configuration file. You are prompted to confirm the name and location of resource file that are to be used. The <code>sybrestore</code> utility will also prompt you to confirm the values in the existing resource files.
A configuration file does not exist.	A new configuration file is created that references the specified resource files.
The resource files and configuration file do not exist.	You are prompted to name a locally running SAP ASE server. Resource files are then constructed based on the values of the locally running server. If you do not name a locally running server, resource files are created based on the sample resource files. You are also prompted to confirm or change the values taken from the sample resource files. A configuration file is created which references the new resource files.

11.5.6.2.1 Creating or Editing the Restore Utility Configuration File

The configuration file contains information about the resource files used to build the SAP ASE server and Backup Server. It also contains information about the saved SAP ASE configuration file and the dump history file.

Context

If the restore tool configuration file `restoremaster.cfg` does not exist in the `$$SYBASE/$SYBASE_ASE` directory, the file will be created. A sample copy of the restore utility configuration file is located in the `$$SYBASE/$SYBASE_ASE/sample/server` directory.

2. Enter: **m**

You see:

```
<<<<<====Master Restore Database Menu ====>>>>>
e : Edit Resource Files
c : Edit Restore Tool Configuration File
r : Restore Master Database
```

3. Enter: **e**

You see the Edit Resources Files wizard.

4. Enter the names of the resource files for your platform.

Option	Description
UNIX/Linux	<ul style="list-style-type: none"> ○ The SAP ASE server ○ sqlloc (language, character sets and sort order) ○ XP server (optional)
Windows	<ul style="list-style-type: none"> ○ The SAP ASE server ○ Backup Server

If you:

- Are editing existing resource files, you are prompted to confirm the names of the files. When editing the resource files, the restore utility modifies only the rows specific to restoring the database.
- Do not have resource files available, you are prompted to create the resource files from either:
 - A locally running an SAP ASE server by connecting to the server and collecting default data. Provide server connection information such as the server name or hostname:port#, the login name, and password. After connecting to the server, `sybrestore` displays the default data enclosed in square brackets, such as:

```
Select network protocol
1 : TCP TCP/IP Net-Library driver
2 : NAMEPIPE Named Pipes Net-Library driver
3 : SPX SPX/IPX Net-Library driver
4 : DECNET DecNET Net-Library driver
Provide a number (1 to 4) ->[1]
Provide its network port number:[5000]
Select ASE application type
1 : MIXED
2 : OLTP
3 : DSS
Provide a number (1 to 3) ->[1]
```

- The sample resource files, are located at:
 - (Windows) `$SYBASE/ASE-15_0/sample/server/`
 - (UNIX and Linux) `$SYBASE/ASE-15_0/init/sample_resource_files/`
 You are prompted to confirm or change the default values taken from the sample resource files.

If the `restoremaster.cfg` does not exist, one is created for you.

5. Provide the name of the SAP ASE server.
6. Provide the system administrator login name and password.

The system administrator password specified is a temporary password that is visible in the resource files. Use this password only to restore the master database. Once you restore the master database, you are prompted for the secure sa password associated with the master database.

7. Provide network configuration information:
 - Network protocol and network port number.
 - SAP ASE application type.
 - Server page size.
 - Language set, character set, and sort order.
8. Specify whether to optimize the SAP ASE configuration.
9. Provide device names, location, and sizes:
 - Master device name, location, and size.
 - `sybsemprocs` name, location, and size.
 - `sybsemdb` name, location, and size.
 - Temporary database name, location, and size.
10. Specify the name and location for the SAP ASE error log.
11. Specify whether to enable PCI in the SAP ASE server. If yes, provide the name, location, and size of the device.
12. Provide the name and network port number of the Backup Server.
13. Specify whether to configure an XP Server. If yes, provide the name and network port number.
14. Specify the name and location of the SAP ASE configuration file, and the dump history file.
15. Confirm the update to the resource files and the restore utility configuration file.

11.5.6.2.3 Resource File Examples

Specific rows are modified by the restore utility when creating or editing resource files.

Rows that are modified are shown in bold.

SAP ASE Server on Windows

The following is the resource file for the SAP ASE server on the Windows platform:

```
#
# --- This file was generated by Sybase Installer ---
#
sybinit.boot_directory:           C:\Sybase.carina
sybinit.release_directory:      C:\Sybase.carina
sqlsrv.do_add_server:            yes
sqlsrv.network_hostname_list:    OAKN00531664A
sqlsrv.network_port_list:       5000
sqlsrv.network_protocol_list:    tcp
sqlsrv.notes:
sqlsrv.connect_retry_delay_time:    5
sqlsrv.connect_retry_count:         5
sqlsrv.new_config:                  yes
#
sqlsrv.server_name:              OAKN00531664A
sqlsrv.sa_password:              Sybase4me
sqlsrv.sa_login:                 sa
sqlsrv.application_type:         MIXED
sqlsrv.server_page_size:         4k
```

```

#
# --- Set up master ----
#
sqlsrv.master_device_physical_name: C:\Sybase.carina\data\master.dat
sqlsrv.master_device_size: 73
sqlsrv.master_db_size: 26
sqlsrv.disk_mirror_name:
#
# --- Set up sybssystemprocs ----
#
sqlsrv.do_create_sybssystemprocs_device: yes
sqlsrv.sybssystemprocs_device_physical_name:
    C:\Sybase.carina\data\sysprocs.dat
sqlsrv.sybssystemprocs_device_size: 172
sqlsrv.sybssystemprocs_db_size: 172
sqlsrv.sybssystemprocs_device_logical_name: sysprocsdev
#
# --- Set up sybssystemdb ----
#
sqlsrv.do_create_sybssystemdb: yes
sqlsrv.do_create_sybssystemdb_db_device: yes
sqlsrv.sybssystemdb_db_device_physical_name:
    C:\Sybase.carina\data\sybsysdb.dat
sqlsrv.sybssystemdb_db_device_physical_size: 6
sqlsrv.sybssystemdb_db_size: 6
sqlsrv.sybssystemdb_db_device_logical_name: systemdbdev
sqlsrv.tempdb_device_physical_name:
    C:\Sybase.carina\data\tempdbdev.dat
sqlsrv.tempdb_device_size: 100
sqlsrv.tempdb_database_size: 100
#
sqlsrv.errorlog:
    C:\Sybase.carina\ASE-15_0\install\OAKN00531664A.log
sqlsrv.sort_order: bin_cp850
sqlsrv.default_characteraset: cp850
sqlsrv.default_language: us_english
#
sqlsrv.preupgrade_succeeded: no
sqlsrv.network_name_alias_list:
sqlsrv.resword_conflict: 0
sqlsrv.resword_done: no
sqlsrv.do_upgrade: no
sqlsrv.characteraset_install_list: cp850
sqlsrv.characteraset_remove_list:
sqlsrv.language_install_list: us_english
sqlsrv.language_remove_list:
sqlsrv.shared_memory_directory:
sqlsrv.addl_cmdline_parameters:
sqlsrv.eventlog: yes
sqlsrv.atr_name_shutdown_required: yes
sqlsrv.atr_name_qinstall: no
#
sqlsrv.do_change_ase_service_account: no
sqlsrv.ase_service_account_name:
sqlsrv.ase_service_account_password:
#
sybinit.charset: cp850
sybinit.language: us_english
sybinit.resource_file:
sybinit.log_file:
sybinit.product: sqlsrv
#
sqlsrv.default_backup_server: OAKN00531664A_BS
#
sqlsrv.xpserver_network_protocol_list: tcp
sqlsrv.xpserver_network_hostname_list: OAKN00531664A
sqlsrv.xpserver_network_port_list: 5002
#

```

```

sqlsrv.do_change_xp_service_account:          no
sqlsrv.xp_service_account_name:
sqlsrv.xp_service_account_password:
#
sqlsrv.do_configure_pci:                    yes
sqlsrv.sybpcidb_device_physical_name:
      C:\Sybase.carina\data\sybpcidbdev_data.dat
sqlsrv.sybpcidb_device_size:                48
sqlsrv.sybpcidb_database_size:             48
#
sqlsrv.do_optimize_config:                 yes
sqlsrv.avail_physical_memory:             2816
sqlsrv.avail_cpu_num:                      3

```

Backup Server on Windows

The following is the resource file for the Backup Server on the Windows platform:

```

#
# --- This is a "sybatch.exe" sample resource file. ---
#
# This sample resource file will configure a new
# Backup Server "SYBASE_BS".
#
sybinit.boot_directory:                    C:\Sybase.carina
sybinit.release_directory:                C:\Sybase.carina
sybinit.product:                             bsrv
sqlsrv.server_name:                       OAKN00531664A
sqlsrv.sa_login:                           sa
sqlsrv.sa_password:                       Sybase4me
bsrv.do_add_backup_server:                   yes
bsrv.server_name:                         OAKN00531664A_BS
bsrv.errorlog:
      C:\Sybase.carina\ASE-15_0\install\OAKN00531664A_BS.log
bsrv.network_port_list:                   5001
bsrv.network_hostname_list:              OAKN00531664A
bsrv.network_protocol_list:              tcp
bsrv.character_set:                      cp850
bsrv.language:                           us_english
bsrv.network_name_alias_list:
bsrv.notes:
bsrv.connect_retry_delay_time:               5
bsrv.connect_retry_count:                   5
bsrv.addl_cmdline_parameters:

```

SAP ASE Server on UNIX

The following is the resource file for the SAP ASE server on UNIX platforms, including Linux:

```

sybinit.release_directory:                USE_DEFAULT
sybinit.product:                             sqlsrv
sqlsrv.server_name:                       qpamd7srv
sqlsrv.sa_password:                       dbasql
sqlsrv.new_config:                           yes
sqlsrv.do_add_server:                         yes
sqlsrv.network_protocol_list:             tcp
sqlsrv.network_hostname_list:            qpamd7

```

```

sqlsrv.network_port_list:                6008
sqlsrv.application_type:                MIXED
sqlsrv.server_page_size:                4K
sqlsrv.force_buildmaster:                  no
sqlsrv.master_device_physical_name:
    /qpamd7_eng2/hlam/ase157esd3/data/master.dat
sqlsrv.master_device_size:              60M
sqlsrv.master_database_size:            26M
sqlsrv.errorlog: USE_DEFAULT
sqlsrv.do_upgrade:                          no
sqlsrv.sybssystemprocs_device_physical_name:
    /qpamd7_eng2/hlam/ase157esd3/data/sysprocs.dat
sqlsrv.sybssystemprocs_device_size:      USE_DEFAULT
sqlsrv.sybssystemprocs_database_size:    USE_DEFAULT
sqlsrv.sybssystemdb_device_physical_name:
    /qpamd7_eng2/hlam/ase157esd3/data/systemdb.dat
sqlsrv.sybssystemdb_device_size:        USE_DEFAULT
sqlsrv.sybssystemdb_database_size:      USE_DEFAULT
sqlsrv.tempdb_device_physical_name:
    /qpamd7_eng2/hlam/ase157esd3/data/tempdb.dat
sqlsrv.tempdb_device_size:              USE_DEFAULT
sqlsrv.tempdb_database_size:            USE_DEFAULT
sqlsrv.default_backup_server:          SYB_BACKUP
#sqlsrv.addl_cmdline_parameters:
#PUT_ANY_ADDITIONAL_COMMAND_LINE_PARAMETERS_HERE
sqlsrv.do_configure_pci:                no
sqlsrv.sybpcidb_device_physical_name:
PUT THE PATH OF YOUR SYBPCIDB DATA DEVICE HERE
sqlsrv.sybpcidb_device_size:            USE_DEFAULT
sqlsrv.sybpcidb_database_size:         USE_DEFAULT
# If sqlsrv.do_optimize_config is set to yes,
#both sqlsrv.avail_physical_memory and
#sqlsrv.avail_cpu_num need to be set.
sqlsrv.do_optimize_config:              no
sqlsrv.avail_physical_memory:
PUT THE AVAILABLE PHYSICAL MEMORY FOR ASE IN OPTIMIZATION
sqlsrv.avail_cpu_num:
PUT THE AVAILABLE NUMBER CPU FOR ASE IN OPTIMIZATION

```

Backup Server on UNIX

The following is the resource file for Backup Server on UNIX platforms, including Linux:

```

sybinit.release_directory:              USE_DEFAULT
sybinit.product:                           bsrv
bsrv.server_name:                       SYB_BACKUP
bsrv.new_config:                             yes
bsrv.do_add_backup_server:                   yes
bsrv.do_upgrade:                             no
bsrv.network_protocol_list:              tcp
bsrv.network_hostname_list:             qpamd7
bsrv.network_port_list:                 6010
bsrv.language:                          USE_DEFAULT
bsrv.character_set:                     USE_DEFAULT
bsrv.tape_config_file:                       USE_DEFAULT
bsrv.errorlog:                           USE_DEFAULT
sqlsrv.related_sqlsrvr:                 qpamd7srv
sqlsrv.sa_login:                         sa
sqlsrv.sa_password:                     dbasql
#bsrv.addl_cmdline_parameters:
#PUT_ANY_ADDITIONAL_COMMAND_LINE_PARAMETERS_HERE

```

sqlloc Utility on UNIX

The following is the resource file for the `sqlloc` utility on UNIX platforms, including Linux:

```
sybinit.release_directory:      USE_DEFAULT
sqlsrv.server_name:            PUT_YOUR_SERVER_NAME_HERE
sqlsrv.sa_login:              sa
sqlsrv.sa_password:
sqlsrv.default_language:      USE_DEFAULT
sqlsrv.language_install_list:  USE_DEFAULT
sqlsrv.language_remove_list:  USE_DEFAULT
sqlsrv.default_character_set:  USE_DEFAULT
sqlsrv.character_set_install_list: USE_DEFAULT
sqlsrv.character_set_remove_list: USE_DEFAULT
sqlsrv.sort_order:            USE_DEFAULT
```

XP Server on UNIX

The following is the resource file for XP Server on UNIX platforms, including Linux:

```
sybinit.release_directory:      USE_DEFAULT
sybinit.product:              xp
xp.server_name:                PUT_YOUR_SERVER_NAME_HERE
xp.new_config:                 yes
xp.do_add_xp_server:           yes
xp.do_upgrade:                 no
xp.network_protocol_list:      tcp
xp.network_hostname_list:      PUT_YOUR_HOSTNAME_HERE
xp.network_port_list:          PUT_YOUR_PORT_NUMBER_HERE
sqlsrv.related_sqlsrvr:        PUT_YOUR_ADAPTIVE_SERVER_NAME_HERE
sqlsrv.sa_login: sa
sqlsrv.sa_password:            USE_DEFAULT
```

11.5.6.3 Restoring a Master Database

The interactive Restore Master Database wizard provides option selections and prompts to restore master database.

Prerequisites

See [Prerequisites for Restoring a Master Database \[page 397\]](#)

8. Enter **y** when prompted to reload the master database.

The SAP ASE server is shut down and the SAP ASE configuration file and dump history file are copied to the new SAP ASE instance. The SAP ASE server is restarted in master recover mode.

The size of the master database defined in the resource file must be greater than or equal to the size of the master database of the dump file. After comparing the size of the master databases, the master database is loaded from the latest dump, and the SAP ASE server is shut down and restarted in normal mode.

9. The wizard automatically opens the Complete Database Restore menu. You can restore one or more user databases and system databases with the exception of the master database.
 - Enter **s** to continue and restore user and system databases. Available source databases are displayed. Enter the number associated with the databases you want to restore. Enter **q** when finished selecting databases.
 - Enter **q** to exit the Complete Database Restore menu.

10. (Optional) You are prompted on whether to perform a `disk reinit` and `disk refit` to recover an missing database device and databases.

If yes, the server is shut down and restarted in master recovery mode. For each device, provide:

- Device name
- Physical name
- Device size
- Device option: `dsync`, `directio`, or `none`



When finished, enter **n** at the prompt, "Do you have additional device to reinit?" You are returned to the Master Database Restore menu.

Important Disclaimers and Legal Information

Hyperlinks

Some links are classified by an icon and/or a mouseover text. These links provide additional information.

About the icons:

- Links with the icon : You are entering a Web site that is not hosted by SAP. By using such links, you agree (unless expressly stated otherwise in your agreements with SAP) to this:
 - The content of the linked-to site is not SAP documentation. You may not infer any product claims against SAP based on this information.
 - SAP does not agree or disagree with the content on the linked-to site, nor does SAP warrant the availability and correctness. SAP shall not be liable for any damages caused by the use of such content unless damages have been caused by SAP's gross negligence or willful misconduct.
- Links with the icon : You are leaving the documentation for that particular SAP product or service and are entering a SAP-hosted Web site. By using such links, you agree that (unless expressly stated otherwise in your agreements with SAP) you may not infer any product claims against SAP based on this information.

Beta and Other Experimental Features

Experimental features are not part of the officially delivered scope that SAP guarantees for future releases. This means that experimental features may be changed by SAP at any time for any reason without notice. Experimental features are not for productive use. You may not demonstrate, test, examine, evaluate or otherwise use the experimental features in a live operating environment or with data that has not been sufficiently backed up.

The purpose of experimental features is to get feedback early on, allowing customers and partners to influence the future product accordingly. By providing your feedback (e.g. in the SAP Community), you accept that intellectual property rights of the contributions or derivative works shall remain the exclusive property of SAP.

Example Code

Any software coding and/or code snippets are examples. They are not for productive use. The example code is only intended to better explain and visualize the syntax and phrasing rules. SAP does not warrant the correctness and completeness of the example code. SAP shall not be liable for errors or damages caused by the use of example code unless damages have been caused by SAP's gross negligence or willful misconduct.

Gender-Related Language

We try not to use gender-specific word forms and formulations. As appropriate for context and readability, SAP may use masculine word forms to refer to all genders.

Videos Hosted on External Platforms

Some videos may point to third-party video hosting platforms. SAP cannot guarantee the future availability of videos stored on these platforms. Furthermore, any advertisements or other content hosted on these platforms (for example, suggested videos or by navigating to other videos hosted on the same site), are not within the control or responsibility of SAP.

© 2020 SAP SE or an SAP affiliate company. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of SAP SE or an SAP affiliate company. The information contained herein may be changed without prior notice.

Some software products marketed by SAP SE and its distributors contain proprietary software components of other software vendors. National product specifications may vary.

These materials are provided by SAP SE or an SAP affiliate company for informational purposes only, without representation or warranty of any kind, and SAP or its affiliated companies shall not be liable for errors or omissions with respect to the materials. The only warranties for SAP or SAP affiliate company products and services are those that are set forth in the express warranty statements accompanying such products and services, if any. Nothing herein should be construed as constituting an additional warranty.

SAP and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP SE (or an SAP affiliate company) in Germany and other countries. All other product and service names mentioned are the trademarks of their respective companies.

Please see <https://www.sap.com/about/legal/trademark.html> for additional trademark information and notices.