


***SORTER - A Simulated Card Sorter
for OS-3**

by Computer Center Staff

September, 1968

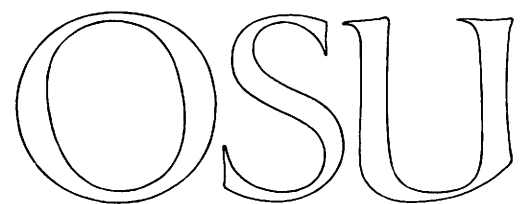

COMPUTER CENTER

**Oregon State University
Corvallis, Oregon 97331**

*SORTER - A Simulated Card Sorter for OS-3

cc-68-33

by

Computer Center Staff

September, 1968

Computer Center
Oregon State University
Corvallis, Oreg. 97331

*SORTER

*SORTER is a program that simulates the operation of a card sorter. It runs under the OS-3 operating system on the CDC 3300.

Input to the *SORTER program is a file of variable length BCD records (80 column keypunch cards, for example); the maximum length of any record is 136 characters. An input file may be read from the card reader or it may be stored in the system as a saved file. In the latter case, the saved file may be prepared as a card deck and copied into a saved file, or the on-line editor can be used to create the file. For a definition of saved files and instructions on the use of EDIT, the user is referred to:

- 1) OS-3 User's Manual, cc-68-3
- 2) A Control Mode Manual for OS-3 Version 2.0, cc-68-21
- 3) OS-3 Teletype Editor Manual, cc-68-17

The format of a program for saving a card deck under some file name is given here:*

```
7<Job #>,<User #>,<Identification field>
8
7 Copy, Ø=<FILE NAME>
8
      }
      card deck here
      }
77
88
7 LOGOFF
8
```

* The characters "<" and ">" in the above prototype are used to denote fields; these characters should not be punched in the card. For example: John Doe has a job no. = 99999 and a user no. = 1234. His first card in the preceding prototype looks like this:

```
7
8 99999,1234,John Doe
```

Prior to using *SORTER, the input file must be equipped to a logical unit; the program rewinds the input file if necessary. Program output is stored in 13 logical units that correspond to the 13 pockets of a sorter. Pockets and their logical unit equivalents are given below:

| <u>Pocket</u> | <u>LUN</u> |
|---------------|------------|
| 0 | 0 |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| 11 | 11 |
| 12 | 12 |
| Reject | 10 |

Upon completion of the program, a file mark is written at the end of each output file and the file is rewound.

The calling sequence for *SORTER is:

*SORTER,I=<lun>,T=<type>,C=<column>,P=<lun>

where I = the input logical unit. If I is given, but no unit is specified, then logical unit 60 is assumed.

T = A number between 1 and 5 that designates the type of sort to be performed.

1. [0-9] punch → Pockets 0 through 9
Blank → Reject
All else → Reject
2. [0-9] punch → Reject
12 punch → Pocket 12
11 punch → Pocket 11
0 punch → Pocket 0
All else → Reject
3. [0-9] punch → Reject
[A-I] punch → Pockets 1 through 9
[J-R] punch → Pocket 11
[S-Z] punch → Pocket 0
All else → Reject
4. [0-9] punch → Reject
[J-R] punch → Pockets 1 through 9
All else → Reject
5. [0-9] punch → Pockets 0 through 9
[A-I] punch → Pocket 12
[J-R] punch → Pocket 11
[S-Z] punch → Reject
All else → Reject

If there is more than one digit punch in the column, sorting takes place on the smallest digit punched. All zone punches ignored except 0 if no other punches in the column.

C = The number of the column upon which the sort will be performed. If no column is named, column 1 is assumed.

P = The logical unit on which totals will be written. If no unit is specified, the standard output unit = 61 will be assumed. If P is not present, totals will be suppressed.

If further sorting is required on one of the output logical units, *SORTER can be called again with this unit as input. Before proceeding, the program will automatically transfer any input logical unit in the range 0-12 to another logical unit and destroy residual information contained in 0-12.

At the conclusion of the program, EDIT may be used to inspect the contents of any output files. By use of COPY, these files may also be listed on the printer or punched as a new deck.

EXAMPLES:

1. This program sorts on columns 1-3 numerically. Data is entered on the teletypewriter.
2. This program sorts on column 1-3 alphabetically. Data file is entered on the teletypewriter.
3. This program sorts on columns 1-3 alphabetically. Data file is entered through the card reader.

Turn Teletype to the on-line position. Press the keys control and A at the same time. A # will be generated. Then type in your job number and user number and press carriage return (CR). Your number will be blotted out for security reasons and another # will be printed. Then type in EDIT CR. "]" will be printed and you will type INPUT CR. Now you are ready to type in the records to be sorted. Each line in the example represents one record. Records are sequentially numbered by the EDIT program.

EXAMPLE 1

#####

#EDIT

Explanation

]INPUT

00001:579

00002:390

00003:491

00004:169

00005:295

00006:395

00007:296

00008:834

00009:900

00010:935

ENTRY OF DATA

00011:517

00012:322

00013:911

00014:067

00015:283

00016:890

00017:525

00018:821

00019:723

00020:000

00021:

]OUT,DATA (Press cntrl W or alt mode to get back into EDIT mode)

]EQUIP,53=DATA

] (Press cntrl A to get back to control mode)

#*SORTER,I=33,C=3,T=1,P (This initiates sort on column 3)

COUNTER VALUES-

0= 4

1= 3

2= 1

3= 2

4= 1

5= 4

6= 1

(SORTING ON COLUMN 3)

7= 2

8= 0

9= 2

11= 0

12= 0

REJECT= 0

TOTAL= 20

#

```
#EDIT
```

```
IFIN,0
```

```
IAPPEND,1
```

```
IAPPEND,2
```

```
IAPPEND,3
```

```
IAPPEND,4
```

```
IAPPEND,5
```

```
IAPPEND,6
```

```
IAPPEND,7
```

```
IAPPEND,8
```

```
IAPPEND,9
```

```
IOUT,TEST
```

```
I Equip,34=TEST
```

```
]
```

(File input: scratch area (this file contains the records with zeroes in column 3). Add to this, file 1 which contains the ones in column 3, by appending file 1, etc. ... through file 9. Then the completed file is written by the output command under the name of Test which is also a file.)

(In order to sort in column 2, we must equip the file named Test = to a logical unit number n, where $12 < n < 50$.)

(Press cntrl A and proceed to sort column 2)

```
##*SORTER,I=34,C=2,T=1
```

```
#EDIT
```

```
IFIN,0
```

(This initiates sorting on column 2; since P was not present in *SORTER statement, the totals (counter values) will not be printed. The program proceeds exactly as the sort on col 3.)

```
1APPEND,1
```

```
1APPEND,2
```

```
1APPEND,3
```

```
1APPEND,4
```

```
1APPEND,5
```

```
1APPEND,6
```

```
1APPEND,7
```

```
1APPEND,8
```

```
1APPEND,9
```

```
1OUT,TEST
```

```
]
```

```
##*SORTER,I=34,C=1,T=1,P  
COUNTER VALUES-
```

| | |
|---------|----|
| 0= | 2 |
| 1= | 1 |
| 2= | 3 |
| 3= | 3 |
| 4= | 1 |
| 5= | 3 |
| 6= | 0 |
| 7= | 1 |
| 8= | 3 |
| 9= | 3 |
| 11= | 0 |
| 12= | 0 |
| REJECT= | 0 |
| TOTAL= | 20 |

(SORTING ON COLUMN 1)

#EDIT

]

]FIN,0

]APPEND,1

]APPEND,2

]APPEND,3

]APPEND,4

]APPEND,5

]APPEND,6

]APPEND,7

]APPEND,8

]APPEND,9

]OUT,TEST

]LIST

:070
:067
:169
:283
:295
:296
:322
:390
:395
:491
:517
:525
:579
:723
:821
:834
:890
:907
:911
:935

(The final listing shows numbers completely sorted from columns 1-3.)

]

#LOGOFF

TIME 4.500 SECONDS MFBLKS 25 COST \$0.52

#

#EDIT

JINPUT

00001:QWE
 00002:WER
 00003:ERT
 00004:RTY
 00005:TYU
 00006:YUI
 00007:UIO
 00008:IOP
 00009:ASD
 00010:SDF
 00011:FGH
 00012:GHJ
 00013:HJK
 00014:JKL
 00015:ZXC
 00016:XCV
 00017:CVB
 00018:BNM
 00019:NMQ
 00020:MQW
 00021:DFG
 00022:VBN
 00023:
 JOUT,TEST

(DATA ENTERED ON TELETYPEWRITER)

J

#EQUIP,34=TEST
 #*SORTER,I=34,C=3,T=1,P
 COUNTER VALUES-

(SORTING ON COLUMN 3 DONE NUMERICALLY
 FIRST.)

| | |
|---------|----|
| 0= | 0 |
| 1= | 1 |
| 2= | 2 |
| 3= | 3 |
| 4= | 3 |
| 5= | 3 |
| 6= | 3 |
| 7= | 2 |
| 8= | 3 |
| 9= | 2 |
| 11= | 0 |
| 12= | 0 |
| REJECT= | 0 |
| TOTAL= | 22 |

#EDIT

]FIN 0

]APPEND, 1

]APPEND, 2

]APPEND, 3

]APPEND, 4

]APPEND, 5

]APPEND, 6

]APPEND, 7

]APPEND, 8

]APPEND, 9

]OUT, TEST

]

**SORTER, I=34, C=3, T=2, P
COUNTER VALUES-

| | |
|---------|----|
| 0= | 5 |
| 1= | 0 |
| 2= | 0 |
| 3= | 0 |
| 4= | 0 |
| 5= | 0 |
| 6= | 0 |
| 7= | 0 |
| 8= | 0 |
| 9= | 0 |
| 11= | 9 |
| 12= | 8 |
| REJECT= | 0 |
| TOTAL= | 22 |

(SORTING DONE ON ZONES IN COLUMN, 3.)

#EDIT

]FIN 12

]APPEND, 11

]APPEND, 0

]OUT, TEST

]

(NOW COLUMN 3 IS SORTED ALPHABETICALLY.)

**SORTER, I=34, C=2, T=1, P
COUNTER VALUES-

(SAME PROCEDURE FOR COLUMN 2.)

| | |
|---------|----|
| 0= | 0 |
| 1= | 1 |
| 2= | 3 |
| 3= | 2 |
| 4= | 3 |
| 5= | 3 |
| 6= | 3 |
| 7= | 2 |
| 8= | 3 |
| 9= | 2 |
| 11= | 0 |
| 12= | 0 |
| REJECT= | 0 |
| TOTAL= | 22 |

#EDIT

JFIN 0

JAPPEND, 1

JAPPEND, 2

JAPPEND, 3

JAPPEND, 4

JAPPEND, 5

JAPPEND, 6

JAPPEND, 7

JAPPEND, 8

JAPPEND, 9

JOUT, TEST

J

**SORTER, I=34, C=2, T=2, P

COUNTER VALUES-

| | |
|---------|----|
| 0= | 7 |
| 1= | 0 |
| 2= | 0 |
| 3= | 0 |
| 4= | 0 |
| 5= | 0 |
| 6= | 0 |
| 7= | 0 |
| 8= | 0 |
| 9= | 0 |
| 11= | 7 |
| 12= | 8 |
| REJECT= | 0 |
| TOTAL= | 22 |

#EDIT

JFIN 12

JAPPEND, 11

JAPPEND, 0

JOUT, TEST

(COLUMNS 2 AND 3 ARE NOW SORTED
ALPHABETICALLY)

J

**SORTER, I=34, C=1, T=1, P

COUNTER VALUES-

| | |
|---------|----|
| 0= | 0 |
| 1= | 2 |
| 2= | 2 |
| 3= | 2 |
| 4= | 3 |
| 5= | 3 |
| 6= | 2 |
| 7= | 2 |
| 8= | 3 |
| 9= | 3 |
| 11= | 0 |
| 12= | 0 |
| REJECT= | 0 |
| TOTAL= | 22 |

(SAME PROCEDURE FOR COLUMN 1.)

#EDIT

JFIN 0

JAPPEND,1

JAPPEND,2

JAPPEND,3

JAPPEND,4

JAPPEND,5

JAPPEND,6

JAPPEND,7

JAPPEND,8

JAPPEND,9

JOUT,TEST

J

**SORTER,I=34,C=1,T=2,P

COUNTER VALUES-

| | |
|---------|----|
| 0= | 8 |
| 1= | 0 |
| 2= | 0 |
| 3= | 0 |
| 4= | 0 |
| 5= | 0 |
| 6= | 0 |
| 7= | 0 |
| 8= | 0 |
| 9= | 0 |
| 11= | 5 |
| 12= | 9 |
| REJECT= | 0 |
| TOTAL= | 22 |

#EDIT

JFIN 12

JAPPEND,11

JAPPEND,0

JOUT,TEST

JLIST

(DATA IS NOW SORTED ALPHABETICALLY
ON COLUMNS 1-3.)

:ASD
:BNM
:CVB
:DFG
:ERT
:FGH
:GHJ
:HJK
:IOP
:JKL
:MQW
:NMQ
:QWE
:RTY
:SDF
:TYU
:UIO
:VBN
:WER
:XCV
:YUI
:ZXC

J

#LOGOFF

TIME 8.800 SECONDS MFBLKS 68 COST \$0.95

EXAMPLE 3

```
7  
8 JOB,80000,ZIP,SAVE FOR KAY.PORTER  
8 COPY,0=FORKEY  
QWE  
WER  
ERT  
RTY  
TYU  
YUI  
UIO  
IOP  
ASD  
SDF  
DFG  
FGH  
GHJ  
HJK  
JKL  
ZXC  
XCV  
CVB  
VBN  
BNM  
NMQ  
MQW  
7  
8  
8 LOGOFF  
8
```

(LISTING OF DATA CARDS WHICH ARE
ENTERED ON CARD READER.)

EXAMPLE 3

#EDIT

JFIN FORKAY

JLIST

:QWE
 :WER
 :ERT
 :RTY
 :TYU
 :YUI
 :UIO
 :IOP
 :ASD
 :SDF
 :DFG
 :FGH
 :GHJ
 :HJK
 :JKL
 :ZXC
 :XCV
 :CVB
 :VBN
 :BNM
 :NMQ
 :MQW

FORKAY IS THE NAME OF DATA FILE
 CARDS THAT HAVE BEEN ENTERED FROM
 CARD READER. WE LIST THEM TO SEE
 OUR DATA LIST.

J

#EQUIP,33=FORKAY

#*SORTER,I=33,C=3,T=1,P

COUNTER VALUES-

| | |
|---------|----|
| 0= | 0 |
| 1= | 1 |
| 2= | 2 |
| 3= | 3 |
| 4= | 3 |
| 5= | 3 |
| 6= | 3 |
| 7= | 2 |
| 8= | 3 |
| 9= | 2 |
| 11= | 0 |
| 12= | 0 |
| REJECT= | 0 |
| TOTAL= | 22 |

THE SORTING CONTINUES AS IT DID IN
 EXAMPLE 2.

```
#EDIT
JFIN 0

JAPPEND,1
JAPPEND,2
JAPPEND,3
JAPPEND,4
JAPPEND,5
JAPPEND,6
JAPPEND,7
JAPPEND,8
JAPPEND,9

JOUT,TEST

]
#EQUIP,34=TEST
**SORTER,I=34,C=3,T=2,P
COUNTER VALUES-
    0=          5
    1=          0
    2=          0
    3=          0
    4=          0
    5=          0
    6=          0
    7=          0
    8=          0
    9=          0
   11=         9
   12=          8
REJECT=        0
TOTAL=        22
```

```
#EDIT
JFIN 12
JAPPEND,11
JAPPEND,0
JOUT,TEST
]
```

**SORTER,I=34,C=2,T=1,P
COUNTER VALUES-

| | |
|---------|----|
| 0= | 0 |
| 1= | 1 |
| 2= | 3 |
| 3= | 2 |
| 4= | 3 |
| 5= | 3 |
| 6= | 3 |
| 7= | 2 |
| 8= | 3 |
| 9= | 2 |
| 11= | 0 |
| 12= | 0 |
| REJECT= | 0 |
| TOTAL= | 22 |

#EDIT

JFIN 0

JAPPEND,1

JAPPEND,2

JAPPEND,3

JAPPEM
JAPPEND,4

JAPPEND,5

JAPPEND,6

JAPPEND,7

JAPPEND,8

JAPPEND,9

JOUT,TEST

**SORTER, I=34, C=2, T=2, P

COUNTER VALUES-

| | |
|---------|----|
| 0= | 7 |
| 1= | 0 |
| 2= | 0 |
| 3= | 0 |
| 4= | 0 |
| 5= | 0 |
| 6= | 0 |
| 7= | 0 |
| 8= | 0 |
| 9= | 0 |
| 11= | 7 |
| 12= | 8 |
| REJECT= | 0 |
| TOTAL= | 22 |

#EDIT

JFIN 12

JAPPEND, 11

JAPPEND, 0

JOUT, TEST

**SORTER, I=34, C=1, T=1, P

COUNTER VALUES-

| | |
|---------|----|
| 0= | 0 |
| 1= | 2 |
| 2= | 2 |
| 3= | 2 |
| 4= | 3 |
| 5= | 3 |
| 6= | 2 |
| 7= | 2 |
| 8= | 3 |
| 9= | 3 |
| 11= | 0 |
| 12= | 0 |
| REJECT= | 0 |
| TOTAL= | 22 |

#EDIT

JFIN 0

JAPPEND,1

JAPPEND,2

JAPPEND,3

JAPPEND,4

JAPPEND,5

JAPPEND,6

JAPPEND,7

JAPPEND,8

JAPPEND,9

JOUT,TEST

J

**SORTER,I=34,C=1,T=2,P

COUNTER VALUES-

| | |
|---------|----|
| 0= | 8 |
| 1= | 0 |
| 2= | 0 |
| 3= | 0 |
| 4= | 0 |
| 5= | 0 |
| 6= | 0 |
| 7= | 0 |
| 8= | 0 |
| 9= | 0 |
| 11= | 5 |
| 12= | 9 |
| REJECT= | 0 |
| TOTAL= | 22 |

#EDIT

JFIN 12

JAPPEND,11

JAPPEND,0

JOUT,TEST

JLIST

:ASD
:BNM
:CVB
:DFG
:ERT
:FGH
:GHJ
:HJK
:IOP
:JKL
:MQW
:NMQ
:QWE
:RTY
:SDF
:TYU
:UIO
:VBN
:WER
:XCV
:YUI
:ZXC

]

#LOGOFF

TIME 7.427 SECONDS MFBLKS 58 COST \$0.82