

 **BOEING**
COMPONENT
MAINTENANCE MANUAL

TO: ALL HOLDERS OF APU AND CARGO FIRE CONTROL PANEL ASSEMBLY M10444 COMPONENT
MAINTENANCE MANUAL 26-15-51

REVISION NO. 29 DATED MAR 01/04

HIGHLIGHTS

Pages which have been added or revised are outlined below together with the highlights of the revision. Remove and insert the affected pages as listed and enter Revision No. and date on the Record of Revision Sheet.

CHAPTER/SECTION
AND PAGE NO.

DESCRIPTION OF CHANGE

REPAIR-GEN
602

Added the part interchangeability table for the
S231T290-XXXX series pushbutton switches.

10820,1084H,1085

Edited without technical change.

26-15-51

HIGHLIGHTS

01.1

Page 1

Mar 01/04

APU AND CARGO FIRE CONTROL PANEL ASSEMBLY, M10444

PART NUMBERS 233N6203-7,-9,-12,-13,-21,-23,-24,
-32,-35,-36,-45 THRU -48,
-48,-53,-56,-67,-70,-73,
-75,-77,-79,-82,-85,-86,
-103 THRU -105,-109 THRU
-111,-161 THRU -165,-169
THRU -172,-187 THRU -198,
-200,-202,-203,-206,-219
THRU -221,-226,-301 THRU
-305,-355,-356,-360,-1007,
-1009,-1012,-1013,-1021,
-1023,-1024,-1032,-1035,
(CONT)

COMPONENT MAINTENANCE MANUAL
WITH
ILLUSTRATED PARTS LIST

26-15-51

TITLE PAGE

01.1

Page 1

Jul 01/03

PART NUMBERS 233N6203-1036,-1045 THRU -1048,
(CONTINUED) -1053,-1056,-1067,-1070,
-1073,-1075,-1077,-1079,
-1082,-1085,-1086,-1103
THRU -1105,-1109 THRU
-1111,-1161 THRU -1165,
-1169 THRU -1172,-1187
THRU -1198,-1200,-1202,
-1203,-1206,-1219 THRU
-1221,-1226,-1301 THRU
-1305,-1347 THRU -1354,
-1356,-1358,-1359,-1381
THRU -1386,-1389,-1398,
-1400 THRU -1407,-1409,
-1411 THRU -1419 (CONT)

COMPONENT MAINTENANCE MANUAL
WITH
ILLUSTRATED PARTS LIST

26-15-51

TITLE PAGE

01.1

Page 2

Jul 01/03



PART NUMBERS 233T6100-9,-15,-19,-21,-27,-36,
(CONT) -39,-42,-43,-47,-49,-50,
-51,-53,-56,-59,-60

COMPONENT MAINTENANCE MANUAL
WITH
ILLUSTRATED PARTS LIST

26-15-51

TITLE PAGE

Page 3

Jul 01/03

01.1

1403666

REVISION RECORD

- Retain this record in front of manual. On receipt of revision, insert revised pages in the manual, and enter revision number, date inserted and initial.

REVISION NUMBER	REVISION DATE	DATE FILED	BY	REVISION NUMBER	REVISION DATE	DATE FILED	BY

26-15-51

REVISION RECORD

01.1

Page 1

Nov 01/98

TEMPORARY REVISION AND SERVICE BULLETIN RECORD

BOEING SERVICE BULLETIN	BOEING TEMPORARY REVISION	OTHER DIRECTIVE	DATE OF INCORPORATION INTO MANUAL
		PRRC12010	OCT 10/82
		PRRC12011	OCT 10/82
		PRRN52337	OCT 10/82
		PRRN52448	OCT 10/82
		PRRC12012	OCT 10/82
233N6203-26-1		PRRB11026	APR 10/84
		PRRN53112	APR 10/84
233N6203-26-02		PRR53112-1	JUL 10/85
		PRR53112-2	JUL 10/85
		MCB1262-004	JUL 10/85
233N6203-26-03		MCB1262-004K	JUL 10/85
		PRR B11110-2	JUL 10/85
		PRR B11235	JUL 10/85
		PRR C12526	JUL 10/85
		PRR 53135-97	JAN 01/90
233N6203-26-04			JUL 01/91
233N6203-26-05		MC 2623MK6023	JAN 01/92
233N6203-26-06		PRR 12537	JUL 01/93
233N6203-26-07			JUN 01/95
233N6203-26-10	26-4 (757)	PRR 54530-241S	NOV 01/01
	26-5 (767)	PRR B12901-10S	NOV 01/01
	26-8 (757)		JUL 01/02
	26-10 (767)		JUL 01/02
233N6203-26-10R1			JUL 01/03
	26-10 (757)		JUL 01/03
	26-14 (767)		JUL 01/03

26-15-51

TR & SB RECORD

01.1

Page 1

Jul 01/03

PAGE	DATE	CODE	PAGE	DATE	CODE
26-15-51					
TITLE PAGE			TESTING & TROUBLE SHOOTING		
1	JUL 01/03	01.1	110	JUL 01/03	01.1
2	JUL 01/03	01.1	111	JUL 01/03	01.1
3	JUL 01/03	01.1	112	JUL 01/03	01.1
4	BLANK		113	JUL 01/03	01.1
REVISION RECORD			114	JUL 01/03	01.1
1	NOV 01/98	01.1	115	JUL 01/03	01.1
2	BLANK		116	JUL 01/03	01.1
TR & SB RECORD			117	JUL 01/03	01.1
1	JUL 01/03	01.1	118	JUL 01/03	01.1
2	BLANK		119	JUL 01/03	01.1
LIST OF EFFECTIVE PAGES			120	JUL 01/03	01.1
*1	MAR 01/04	01	121	JUL 01/03	01.1
THRU LAST PAGE			122	JUL 01/03	01.1
CONTENTS			123	JUL 01/03	01.1
1	JUL 01/03	01.1	124	JUL 01/03	01.1
2	BLANK		125	JUL 01/03	01.1
INTRODUCTION			126	JUL 01/03	01.1
1	NOV 01/98	01.1	127	JUL 01/03	01.1
2	BLANK		128	JUL 01/03	01.101
DESCRIPTION & OPERATION			129	JUL 01/03	01.101
1	NOV 01/98	01.1	130	JUL 01/03	01.101
2	BLANK		131	JUL 01/03	01.1
TESTING & TROUBLE SHOOTING			132	BLANK	
101	JUL 01/03	01.1	133	JUL 01/03	01.1
102	JUL 01/03	01.1	134	BLANK	
103	JUL 01/03	01.1	135	JUL 01/03	01.1
104	JUL 01/03	01.1	136	BLANK	
105	JUL 01/03	01.1	137	JUL 01/03	01.1
106	JUL 01/03	01.1	138	BLANK	
107	JUL 01/03	01.1	139	JUL 01/03	01.1
108	JUL 01/03	01.1	140	BLANK	
109	JUL 01/03	01.1	141	JUL 01/03	01.1
			142	BLANK	
			143	JUL 01/03	01.1
			144	BLANK	
			145	JUL 01/03	01.1
			146	BLANK	
			147	JUL 01/03	01.1
			148	BLANK	
			149	JUL 01/03	01.1
			150	BLANK	
			151	JUL 01/03	01.1

* = REVISED, ADDED OR DELETED

26-15-51

EFFECTIVE PAGES
CONTINUED Page 1
01 Mar 01/04

PAGE	DATE	CODE	PAGE	DATE	CODE
TESTING & TROUBLE SHOOTING CONT.			TESTING & TROUBLE SHOOTING CONT.		
152	BLANK		180N	BLANK	
153	JUL 01/03	01.1	1800	JUL 01/03	01.1
154	BLANK		180P	BLANK	
155	JUL 01/03	01.1	180Q	JUL 01/03	01.1
156	BLANK		180R	BLANK	
157	JUL 01/03	01.1			
158	BLANK		REPAIR-GENERAL		
159	JUL 01/03	01.1	601	NOV 01/98	01.1
160	BLANK		*602	MAR 01/04	01.1
161	JUL 01/03	01.1	ILLUSTRATED PARTS LIST		
162	BLANK		1001	NOV 01/98	01.1
163	JUL 01/03	01.1	1002	JUL 01/02	01.1
164	BLANK		1003	JUL 01/02	01.1
165	JUL 01/03	01.1	1004	JUL 01/02	01.1
166	BLANK		1005	JUL 01/02	01.1
167	JUL 01/03	01.1	1006	JUL 01/02	01.1
168	BLANK		1007	JUL 01/02	01.1
169	JUL 01/03	01.1	1008	JUL 01/02	01.1
170	BLANK		1009	JUL 01/02	01.1
171	JUL 01/03	01.1	1010	JUL 01/02	01.1
172	BLANK		1011	JUL 01/02	01.1
173	JUL 01/03	01.1	1012	JUL 01/02	01.1
174	BLANK		1013	JUL 01/02	01.1
175	JUL 01/03	01.1	1014	JUL 01/02	01.1
176	BLANK		1015	JUL 01/02	01.1
177	JUL 01/03	01.1	1016	JUL 01/02	01.1
178	BLANK		1017	JUL 01/02	01.1
179	JUL 01/03	01.1	1018	JUL 01/02	01.1
180	BLANK		1019	JUL 01/02	01.1
180A	JUL 01/03	01.1	1020	JUL 01/03	01.1
180B	BLANK		1021	JUL 01/03	01.1
180C	JUL 01/03	01.1	1022	JUL 01/03	01.1
180D	BLANK		1023	JUL 01/03	01.1
180E	JUL 01/03	01.1	1024	JUL 01/03	01.1
180F	BLANK		1025	JUL 01/03	01.101
180G	JUL 01/03	01.1	1026	JUL 01/03	01.101
180H	BLANK		1027	JUL 01/03	01.101
180I	JUL 01/03	01.1	1028	JUL 01/03	01.101
180J	BLANK		1029	JUL 01/03	01.101
180K	JUL 01/03	01.1	1030	JUL 01/03	01.101
180L	BLANK		1031	JUL 01/03	01.101
180M	JUL 01/03	01.1			

* = REVISED, ADDED OR DELETED

26-15-51

EFFECTIVE PAGES
CONTINUED Page 2
01 Mar 01/04

PAGE	DATE	CODE	PAGE	DATE	CODE
ILLUSTRATED PARTS LIST		CONT.	ILLUSTRATED PARTS LIST		CONT.
1032	JUL 01/03	01.101	1074	JUL 01/03	01.1
1033	JUL 01/03	01.101	1075	JUL 01/03	01.1
1034	JUL 01/03	01.101	1076	JUL 01/03	01.1
1035	JUL 01/03	01.101	1077	JUL 01/03	01.1
1036	JUL 01/03	01.101	1078	JUL 01/03	01.1
1037	JUL 01/03	01.101	1079	JUL 01/03	01.1
1038	JUL 01/03	01.101	1080	JUL 01/03	01.1
1039	JUL 01/03	01.101	1080A	JUL 01/03	01.1
1040	JUL 01/03	01.101	1080B	JUL 01/03	01.1
1041	JUL 01/03	01.1	1080C	JUL 01/03	01.1
1042	JUL 01/03	01.1	1080D	JUL 01/03	01.1
1043	JUL 01/03	01.1	1080E	JUL 01/03	01.1
1044	JUL 01/03	01.1	1080F	JUL 01/03	01.1
1045	JUL 01/03	01.1	1080G	JUL 01/03	01.1
1046	JUL 01/03	01.1	1080H	JUL 01/03	01.1
1047	JUL 01/03	01.1	1080I	JUL 01/03	01.1
1048	JUL 01/03	01.1	1080J	JUL 01/03	01.1
1049	JUL 01/03	01.1	1080K	JUL 01/03	01.1
1050	JUL 01/03	01.1	1080L	JUL 01/03	01.1
1051	JUL 01/03	01.1	1080M	JUL 01/03	01.1
1052	JUL 01/03	01.1	1080N	JUL 01/03	01.1
1053	JUL 01/03	01.1	1080O	JUL 01/03	01.1
1054	JUL 01/03	01.1	1080P	JUL 01/03	01.1
1055	JUL 01/03	01.1	1080Q	JUL 01/03	01.1
1056	JUL 01/03	01.1	1080R	JUL 01/03	01.1
1057	JUL 01/03	01.1	1080S	JUL 01/03	01.1
1058	JUL 01/03	01.1	1080T	JUL 01/03	01.1
1059	JUL 01/03	01.1	1080U	JUL 01/03	01.1
1060	JUL 01/03	01.1	1080V	JUL 01/03	01.1
1061	JUL 01/03	01.1	1080W	JUL 01/03	01.1
1062	JUL 01/03	01.1	1080X	JUL 01/03	01.1
1063	JUL 01/03	01.1	1080Y	JUL 01/03	01.1
1064	JUL 01/03	01.1	1080Z	JUL 01/03	01.1
1065	JUL 01/03	01.1	1081	JUL 01/03	01.1
1066	JUL 01/03	01.1	1082	JUL 01/03	01.1
1067	JUL 01/03	01.1	1082A	JUL 01/03	01.1
1068	JUL 01/03	01.1	1082B	JUL 01/03	01.1
1069	JUL 01/03	01.1	1082C	JUL 01/03	01.1
1070	JUL 01/03	01.101	1082D	JUL 01/03	01.1
1071	JUL 01/03	01.1	1082E	JUL 01/03	01.1
1072	JUL 01/03	01.1	1082F	JUL 01/03	01.1
1073	JUL 01/03	01.1	1082G	BLANK	

* = REVISED, ADDED OR DELETED

26-15-51

EFFECTIVE PAGES
CONTINUED Page 3
01 Mar 01/04

PAGE	DATE	CODE	PAGE	DATE	CODE
ILLUSTRATED PARTS LIST		CONT.	ILLUSTRATED PARTS LIST		CONT.
1082H	JUL 01/03	01.101	1084V	JUL 01/03	01.1
1082I	JUL 01/03	01.101	1084W	JUL 01/03	01.1
1082J	JUL 01/03	01.101	1084X	JUL 01/03	01.1
1082K	JUL 01/03	01.101	1084Y	JUL 01/03	01.1
1082L	JUL 01/03	01.101	1084Z	JUL 01/03	01.1
1082M	JUL 01/03	01.101	*1085	MAR 01/04	01.1
1082N	JUL 01/03	01.101	1086	JUL 01/03	01.101
*1082O	MAR 01/04	01.1	1086A	JUL 01/03	01.101
1082P	JUL 01/03	01.101	1086B	JUL 01/03	01.101
1082Q	JUL 01/03	01.101	1086C	JUL 01/03	01.101
1082R	JUL 01/03	01.101	1086D	JUL 01/03	01.101
1082S	JUL 01/03	01.101	1086E	JUL 01/03	01.101
1082T	JUL 01/03	01.101	1086F	JUL 01/03	01.101
1082U	JUL 01/03	01.101	1086G	JUL 01/03	01.101
1082V	JUL 01/03	01.101	1086H	BLANK	
1082W	JUL 01/03	01.101			
1082X	BLANK				
1082Y	JUL 01/03	01.101			
1082Z	JUL 01/03	01.101			
1083	JUL 01/03	01.101			
1084	JUL 01/03	01.101			
1084A	JUL 01/03	01.101			
1084B	JUL 01/03	01.101			
1084C	JUL 01/03	01.1			
1084D	JUL 01/03	01.1			
1084E	JUL 01/03	01.1			
1084F	JUL 01/03	01.1			
1084G	JUL 01/03	01.1			
*1084H	MAR 01/04	01.1			
1084I	JUL 01/03	01.101			
1084J	JUL 01/03	01.101			
1084K	JUL 01/03	01.101			
1084L	JUL 01/03	01.101			
1084M	JUL 01/03	01.101			
1084N	JUL 01/03	01.101			
1084O	JUL 01/03	01.101			
1084P	JUL 01/03	01.101			
1084Q	JUL 01/03	01.101			
1084R	JUL 01/03	01.101			
1084S	JUL 01/03	01.101			
1084T	JUL 01/03	01.101			
1084U	JUL 01/03	01.1			

* = REVISED, ADDED OR DELETED

26-15-51

EFFECTIVE PAGES
 LAST PAGE Page 4
 01 Mar 01/04

TABLE OF CONTENTS

<u>Paragraph Title</u>	<u>Page</u>
Description and Operation	1
Testing and Trouble Shooting.	101
Disassembly*[1]
Cleaning.*[1]
Check*[1]
Repair.	601
Assembly.*[1]
Fits and Clearances (not applicable)	
Special Tools, Fixtures, and Equipment.*[2]
Illustrated Parts List.	1001

.*[1] Use applicable procedures in S0PM 20-11-05 and standard industry practices.

.*[2] Special instructions not required.

INTRODUCTION

The instructions in this manual supply the data necessary to do the maintenance functions together with the test, trouble shooting, and replacement of the defective components.

This manual is divided into different parts:

- | | |
|---|-----------------------------|
| 1. Title Page | 4. List of Effective Pages |
| 2. Record of Revisions | 5. Table of Contents |
| 3. Temporary Revisions &
Service Bulletin Record | 6. Introduction |
| | 7. Procedures and IPL Parts |

Refer to the Table of Contents for the page location of the applicable parts.

All dimensions, measures, quantities and weights used in the manual are in English units. When metric equivalents are given they will be in the parentheses that follow the English units.

The Illustrated Parts Lists (IPL) is used as shown in the introduction of that parts.

Design changes, optional parts, configuration differences and Service Bulletin modifications cause different part numbers. These part numbers are identified in the Illustrated Parts List (IPL) with an alphabetical character to the end of the basic item number. The new item number is referred to as an alpha-variant. Through the manual, IPL basic item numbers also apply to alpha-variants unless otherwise shown differently.

Verification:

Testing/TS Nov 11/82

26-15-51

INTRODUCTION

01.1

Page 1

Nov 01/98

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED



APU AND CARGO FIRE CONTROL PANEL ASSEMBLY M10444
DESCRIPTION AND OPERATION

1. The fire control panel has a fire control switch, lighted status display indicators (four of which also contain push switches), relays and diodes. A wire bundle connects all the electrical components except the fire control switch which has its own cable connection. All components are installed on either the baseplate or the support bracket. The standoff spacers connect the baseplate with the support bracket.

26-15-51

DESCRIPTION & OPERATION

01.1

Page 1

Nov 01/98

TESTING AND TROUBLE SHOOTING

1. Test Equipment

- A. Power Supply: 28 \pm 0.1v dc, 0.5A max
- B. Power Supply: 5 \pm 0.1v ac, 400 \pm 10 Hz
- C. Multimeter: Any model in the Simpson 260 series multimeters or equivalent
- D. Test Connector: (Boeing Breakout Box A33003-2 with test cables A33003-36 and -37 may be used.)
 - (1) BACC45FT18-31S6 (to connect with J2)
 - (2) BACC45FT18-31S7 (to connect with J3)

2. Functional Test

- A. Perform a functional test of the Fire Control Switch (S39 or S5, depending on the assembly part number) per the procedures of the vendor CMM (Page CMM 26-21-07, Continuity and solenoid test section), using the Page test set E301-1076-001. An alternate procedure for testing the fire control switch is provided in Fig. 105A of this CMM. This procedure requires a test connector BACC45FT20-41S7, and two 28 VDC lamps.
- B. When you rework S3 or S4 (P/N S231T290-1060 or -4060), make sure that it contains a master module with relamp lockout feature per vendor data. A proper switch master module is necessary because S3 (S4) is a momentary switch with a relamp lockout feature.
- C. 233T6100 assemblies are 233N6203 assemblies with the lightplate attached. For unit without the lightplate attached (all 233N6203 assemblies except 233N6203-3XX and -13XX assemblies)):

Measure the resistance between:	Expect Result
J2-1 and J1 centerpost	3 ohms MAX
J2-2 and J1 base	3 ohms MAX
J2-1 and J2-2	100k ohms MIN

- D. Connect test connectors to panel. See Fig. 101 for component location.
- E. For all assemblies except 233N6203-1347 and up and some 233T6100-XX (see the table below for details), perform the functional test of the module per the following table:

26-15-51

FIGURE	UUT Part Number
102	233T6100-9,-15,-39 (with 233N6203-48 or -190),-53
	233N6203-7,-12,-32,-46,-48,-77,-79,-109,-110,-111,-163,-164,-165,-171,-172,-190,-194,-198,-220,-303,-304,-305,-356,-360,-1007,-1012,-1032,-1046,-1048,-1077,-1079,-1109,-1110,-1111,-1163,-1164,-1165,-1171,-1172,-1190,-1194,-1198,-1200,-1303,-1304,-1305
103	233N6203-9,-23,-45,-103,-104,-105,-161,-162,-169,-170,-301,-302,-355,-1009,-1023,-1045,-1103,-1104,-1105,-1161,-1162,-1169,-1170,-1301,-1302
104	233T6100-19,-21,-27,-42 (with 233N6203-53 or -191), -43 (with 233N6203-56 or -192),-56
	233N6203-13,-21,-24,-53,-56,-82,-187,-188,-191,-192,-200,-221,-1013,-1021,-1024,-1053,-1056,-1082,-1187,-1188,-1191,-1192,-1200,-1221
105	233T6100-36,-47 (with 233N6203-67 or -193),-49, -50,-51 (with 233N6203-75 or -197),-59 (with 233N6203-85 or -202),-60 (with 233N6203-203 or -226)
	233N6203-35,-36,-47,-67,-70,-73,-75,-85,-86,-189,-193,-195,-196,-197,-202,-203,-206,-219,-226,-1035,-1036,-1047,-1067,-1070,-1073,-1075,-1085,-1086,-1189,-1193,-1195,-1196,-1197,-1202,-1203,-1206,-1219,-1226

F. For assemblies 233N6203-1347 and up and some 233T6100-XX (see the table below for details), perform the functional test as follows:

- (1) Remove the lightplate from the module.

26-15-51

(2) Perform the functional test of the module per the following table.


MODULE TO BE TESTED	TEST PER PROCEDURE FOR	CMM
233T6100-39 with 233N6203-93 or -212	233N6203-93 or -212	26-15-52
233T6100-42 with 233N6203-94 or -213	233N6203-94 or -213	26-15-52
233T6100-43 with 233N6203-95 or -214	233N6203-95 or -214	26-15-52
233T6100-43 with 233N6203-160 or -205	233N6203-160 or -205	26-15-52
233T6100-47 with 233N6203-96 or -215	233N6203-96 or -215	26-15-52
233T6100-51 with 233N6203-98 or -217	233N6203-98 or -217	26-15-52
233T6100-59 with 233N6203-143 or -186	233N6203-143 or -186	26-15-55
233N6203-1347	233N6203-1048	26-15-51
233N6203-1348	233N6203-1053	26-15-51
233N6203-1349	233N6203-1056	26-15-51
233N6203-1350	233N6203-1067	26-15-51
233N6203-1351	233N6203-1070	26-15-51
233N6203-1352	233N6203-1073	26-15-51
233N6203-1353	233N6203-1075	26-15-51
233N6203-1354	233N6203-1079	26-15-51
233N6203-1356	233N6203-1082	26-15-51
233N6203-1358	233N6203-1085	26-15-51
233N6203-1359	233N6203-1086	26-15-51
233N6203-1381	233N6203-1093	26-15-52
233N6203-1382	233N6203-1094	26-15-52
233N6203-1383	233N6203-1095	26-15-52
233N6203-1384	233N6203-1096	26-15-52
233N6203-1385	233N6203-1098	26-15-52
233N6203-1386	233N6203-1143	26-15-55
233N6203-1389	233N6203-1160	26-15-52
233N6203-1398	233N6203-1186	26-15-55
233N6203-1400	233N6203-1190	26-15-51
233N6203-1401	233N6203-1191	26-15-51
233N6203-1402	233N6203-1192	26-15-51
233N6203-1403	233N6203-1193	26-15-51
233N6203-1404	233N6203-1195	26-15-51
233N6203-1405	233N6203-1196	26-15-51
233N6203-1406	233N6203-1197	26-15-51
233N6203-1407	233N6203-1198	26-15-51
233N6203-1409	233N6203-1200	26-15-51
233N6203-1411	233N6203-1202	26-15-51
233N6203-1412	233N6203-1203	26-15-51
233N6203-1413	233N6203-1205	26-15-52
233N6203-1414	233N6203-1212	26-15-52
233N6203-1415	233N6203-1213	26-15-52
233N6203-1416	233N6203-1214	26-15-52
233N6203-1417	233N6203-1215	26-15-52
233N6203-1418	233N6203-1217	26-15-52
233N6203-1419	233N6203-1226	26-15-51

26-15-51

- (3) Attach the lightplate to the module, and perform the following lightplate test:
 - (a) Apply 5 +/-0.1v ac, 400 +/-10 Hz between J2-1 (+) and J2-1 (-).
 - (b) Verify that all the lightplate legends are on.
 - (c) Remove 5v ac from J2-1 and J2-2.

26-15-51

TESTING & TROUBLE SHOOTING
01.1 Page 104
Jul 01/03

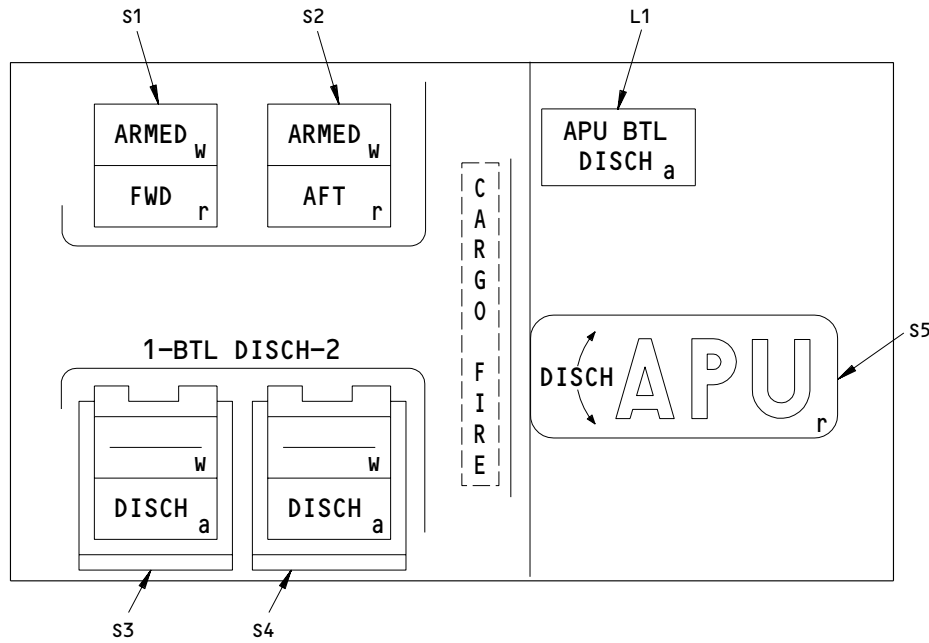


233N6203-7,-9,-13,-23,-32,-45,-46,-103,-104,-105,-110,-161,-162,-164,-1169,
 -170,-171,-194,-221,-1007,-1009,-1013,-1023,-1032,-1045,-1046,-1103,
 -1104,-1105,-1110,-1161,-1162,-1164,-1169,-1170,-1171,-1194,-1221

233T6100-9,-19

Component Locations
 Figure 101 (Sheet 1)

26-15-51

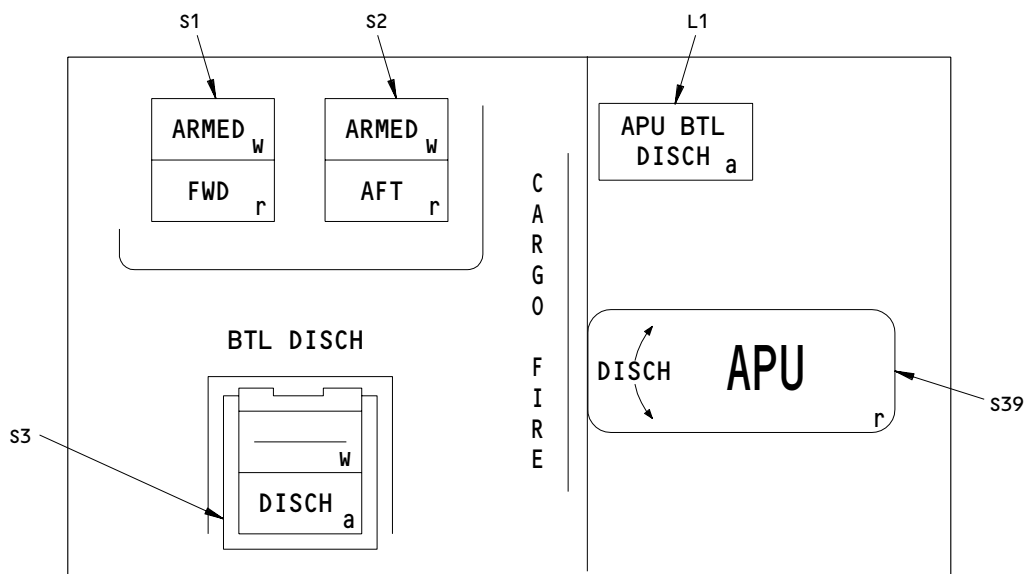


233N6203-36,-47,-67,-70,-85,-189,-193,-195,-202,-219,-1036,-1047,-1067,-1070,
 -1085,-1089,-1189,-1193,-1195,-1202,-1219,-1350,-1351,-1358,-1384,-1386,
 -1389,-1398,-1403,-1404,-1405,-1406,-1411,-1412,-1413,-1417,-1419

233T6100-36,-43 1 ,-47,-49,-59

1 233T6100-43 WITH 233N6203-160 OR -205 INSTALLED

Component Locations
 Figure 101 (Sheet 2)


26-15-51

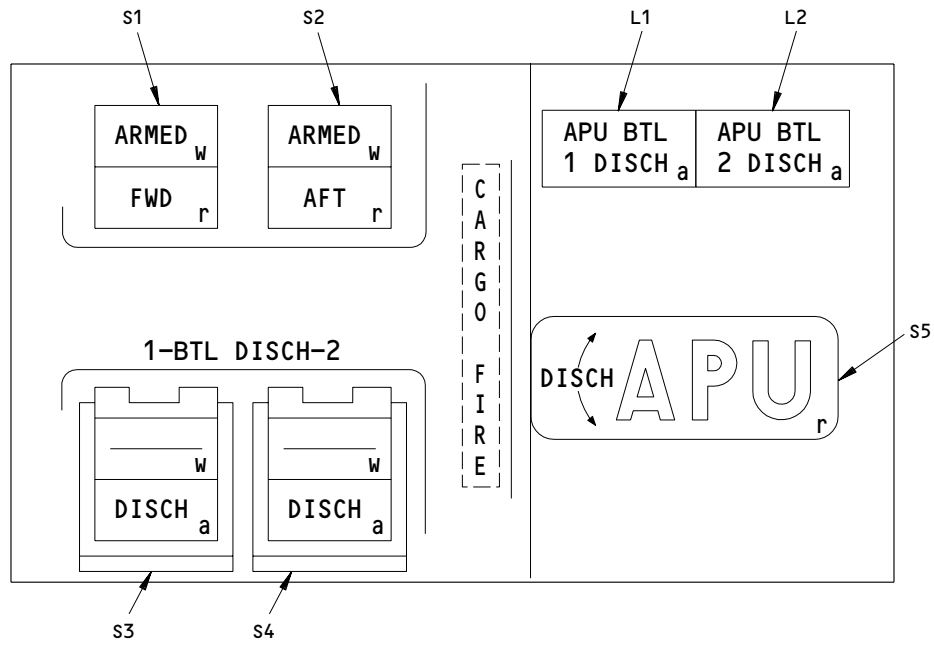


233N6203-12,-21,-77,-109,-111,-163,-165,-172,-187,-220,-1012,-1021,
 -1077,-1109,-1111,-1163,-1165,-1172,-1187,-1220
 233T6100-15,-21


Component Locations
 Figure 101 (Sheet 3)

26-15-51

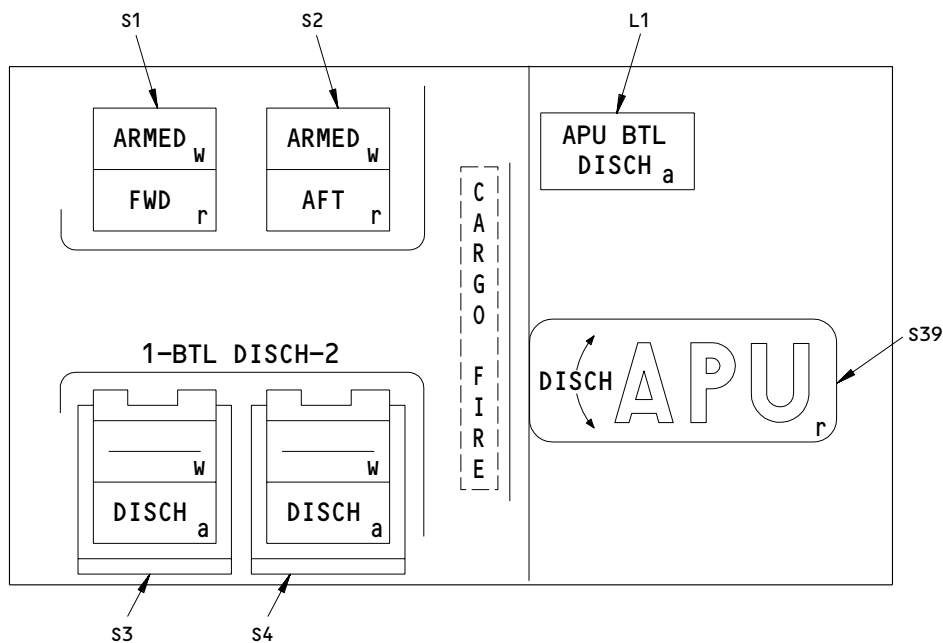


233N6203-24,-48,-53,-56,-79,-82,-188,-190,-191,-192,-198,-200,-1024,-1048,-1053,
 -1056,-1079,-1082,-1188,-1190,-1191,-1192,-1198,-1200,-1347,-1348,-1349,
 -1354,-1356,-1381,-1382,-1383,-1400,-1401,-1402,-1407,-1409,-1414,-1415,
 -1416

233T6100-27,-39,-42,-43 , -53,-56

 233T6100-43 WITH 233N6203-56,-95,-192 OR -214 INSTALLED

Component Locations
 Figure 101 (Sheet 4)

26-15-51

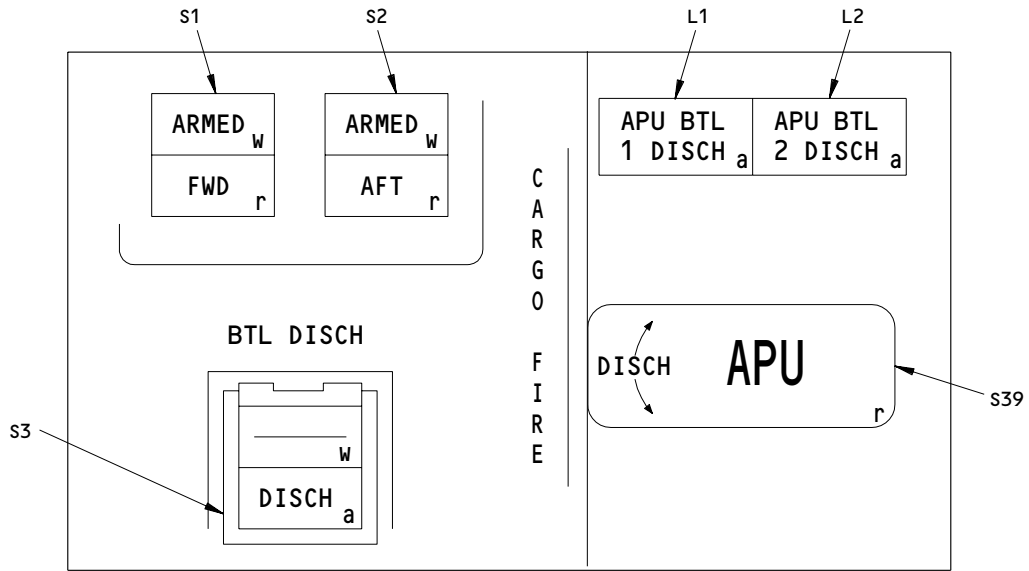


233N6203-35,-73,-75,-86,-196,-197,-203,-206,-226,-1035,-1073,-1075,
 -1086,-1196,-1197,-1203,-1206,-1226,-1352,-1353,-1359,-1385,
 -1418

233T6100-50,-51,-60

Component Locations
 Figure 101 (Sheet 5)


26-15-51

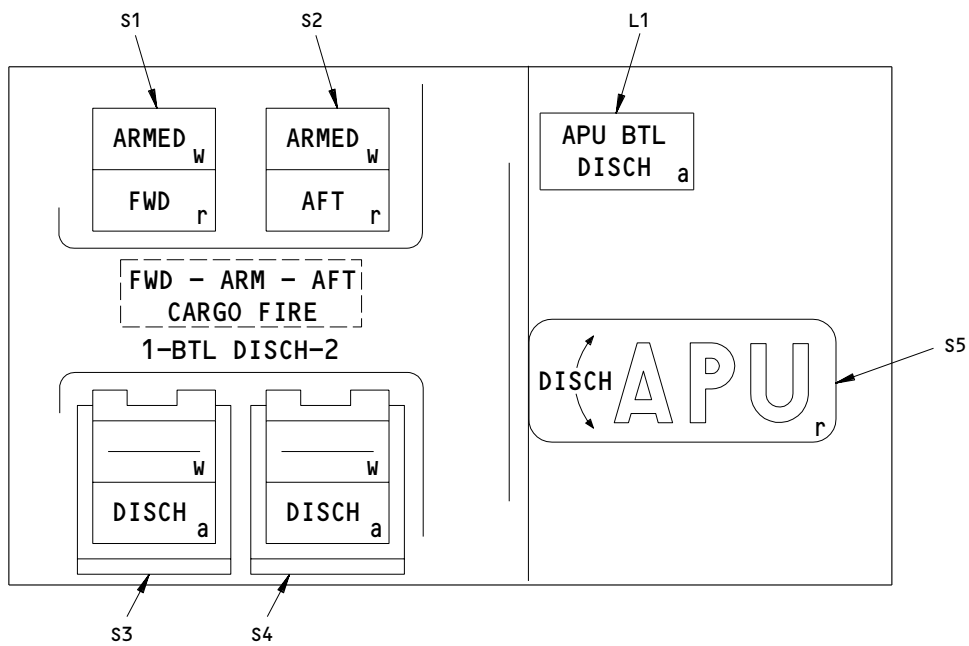

233N6203-301,-302,-304,-355,-356,-1301,-1302,-1304

Component Locations
 Figure 101 (Sheet 6)

26-15-51

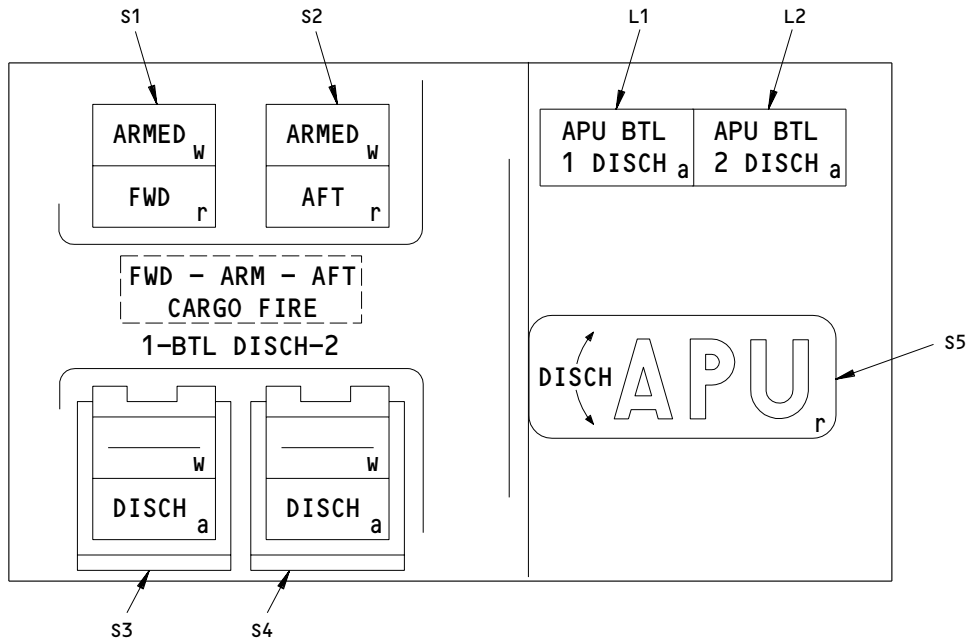

233N6203-303,-305,-360,1303,-1305

Component Locations
 Figure 101 (Sheet 7)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
S1	Connect 5v ac to J2-1		
	Connect 5v ac return to J2-2		
	Push switch S1 once to turn S1 indicator on (ARMED) or off		
	Measure continuity (3 ohms max) or open (100K min) between the specified pins:		
		S1 (ARMED)	
		<u>S1 on</u>	<u>S1 off</u>
	J2-22 and J2-16	Open	Con
	J3-22 and J3-16	Open	Con
	J2-8 and J2-6	Open	Con
	J2-8 and J2-7	Con	Open
J2-21 and J2-9	Open	Con	
J2-21 and J2-10	Con	Open	
J2-22 and J2-17	Open	Open	
S1, S3	Push and hold S3 for the subsequent reading		
	J2-22 and J2-17	Con	Open
	J3-22 and J3-17	Open	Open
S1, S4	Push and hold S4 for the subsequent reading		
	J3-22 and J3-17	Con	Open
S2	Leave S1 in off position		
	Push switch S2 once to turn S2 indicator on (ARMED) or off		
		S2 (ARMED)	
		<u>S2 on</u>	<u>S2 off</u>
	J3-5 and J3-20	Open	Con
	J2-5 and J2-20	Open	Con
	J3-8 and J3-6	Open	Con
	J3-8 and J3-7	Con	Open
	J3-21 and J3-9	Open	Con
	J3-21 and J3-10	Con	Open
J2-5 and J2-17	Open	Open	

233T6100-9, -15, -39 (with 233N6203-48 or -190), -53;
233N6203-7, -12, -32, -46, -48, -77, -79, -109, -110, -111, -163, -164, -165,
-171, -172, -190, -194, -198, -220, -303, -304, -305, -356, -360, -1007, -1012,
-1032, -1046, -1048, -1077, -1079, -1109, -1110, -1111, -1163, -1164, -1165,
-1171, -1172, -1190, -1194, -1198, -1200, -1303, -1304, -1305

Functional Test
Figure 102 (Sheet 1)

26-15-51

TESTING & TROUBLE SHOOTING
01.1 Page 112
Jul 01/03

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
		<u>S2 on</u>	<u>S2 off</u>
S2, S3	Push and hold S3 for the subsequent reading J2-5 and J2-17 J3-5 and J3-17	Con Open	Open Open
S2, S4	Push and hold S4 for the subsequent reading J3-5 and J3-17	Con	Open
wiring, S1	Push S1 to on (ARMED) J2-5 and J2-22 J3-5 and J3-22	Con Con	Open Open
wiring, S1	Push S1 once to off J2-5 and J2-22 J3-5 and J3-22	Open Open	Open Open
	Remove 5v ac from J2-1 Remove 5v ac return from J2-2		
	Apply +28 vdc to: J2-3, J3-3, J2-17 and J3-17 Momentarily ground pins:		<u>Indicators on</u>
S1	J2-12		S1 (FWD)
S2	J3-12		S2 (AFT)
L2	*[1] J2-19		L2
S1, S3, L2	*[1] J2-4		S1, S3, L2
S1, S3	*[2] J2-4		S1, S3
L1	J3-19		L1
S2, S4, L1	J3-4		S2, S4, L1
K1	J2-23		None
K1, S3	J2-23 and J2-15		S3
K2	J3-23		None
K2, S4	J3-23 and J3-15		S4

233T6100-9, -15, -39 (with 233N6203-48 or -190), -53;
233N6203-7, -12, -32, -46, -48, -77, -79, -109, -110, -111, -163, -164, -165,
-171, -172, -190, -194, -198, -220, -303, -304, -305, -356, -360, -1007, -1012,
-1032, -1046, -1048, -1077, -1079, -1109, -1110, -1111, -1163, -1164, -1165,
-1171, -1172, -1190, -1194, -1198, -1200, -1303, -1304, -1305

Functional Test
Figure 102 (Sheet 2)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS
	Remove connections from J2-3, J3-3. Connect J2-3, J3-3, J3-15 and J2-15 to ground Momentarily connect +28v dc to pins	<u>All Indicators Off</u>
S1	J2-12	S1 (FWD)
S2	J3-12	S2 (AFT)
L2	*[1] J2-19	L2
S1, S3, L2	*[1] J2-4	S1 (FWD), S3, L2
S1, S3	*[2] J2-4	S1 (FWD), S3
L1	J3-19	L1
S2, S4, L1	J3-4	S2 (AFT), S4, L1
S3	J2-23	S3
S4	J3-23	S4
	Remove all connections.	
	Measure resistance between the specified pins: (Forward Diode Test)	
CR2	(+)J3-11 and J3-21	50 ohms max
CR1	(+)J2-11 and J2-21	50 ohms max
	(Reverse Diode Test)	
CR2	(+)J3-21 and J3-11	100K min
CR1	(+)J2-21 and J2-11	100K min
		S3 S3
		<u>Released</u> <u>Pushed and Held</u>
S3	J2-31 and J2-18	Con Open
	J2-31 and J2-30	Open Con
	*[3] J3-26 and J3-24	Open Con

233T6100-9, -15, -39 (with 233N6203-48 or -190), -53;
 233N6203-7, -12, -32, -46, -48, -77, -79, -109, -110, -111, -163, -164, -165,
 -171, -172, -190, -194, -198, -220, -303, -304, -305, -356, -360, -1007, -1012,
 -1032, -1046, -1048, -1077, -1079, -1109, -1110, -1111, -1163, -1164, -1165,
 -1171, -1172, -1190, -1194, -1198, -1200, -1303, -1304, -1305

Functional Test
 Figure 102 (Sheet 3)

26-15-51

TESTING & TROUBLE SHOOTING
 01.1 Page 114
 Jul 01/03

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
S4	<p>J3-31 and J3-18 J3-31 and J3-30 *[3] J3-26 and J3-24</p>	<p>S4 <u>Released</u> Con Open Open</p>	<p>S4 Pushed <u>and Held</u> Open Con Con</p>

- *[1] 233T6100-15;
233N6203-12, -77, -109, -163, -172, -220, -1012, -1077, -1109, -1163
- *[2] All except 233T6100-15 and
233N6203-12, -77, -109, -163, -172, -220, -1012, -1077, -1109, -1163
- *[3] 233T6100-53 (with 233N6203-48, -190); 233N6203-79, -1079

233T6100-9, -15, -39 (with 233N6203-48 or -190), -53;
233N6203-7, -12, -32, -46, -48, -77, -79, -109, -110, -111, -163, -164, -165,
-171, -172, -190, -194, -198, -220, -303, -304, -305, -356, -360, -1007, -1012,
-1032, -1046, -1048, -1077, -1079, -1109, -1110, -1111, -1163, -1164, -1165,
-1171, -1172, -1190, -1194, -1198, -1200, -1303, -1304, -1305

Functional Test
Figure 102 (Sheet 4)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS		
S1	Connect 5v ac to pin J2-1 Connect 5v ac return to pin J2-2 Push switch S1 once to turn S1 indicator on (ARMED) or off Measure continuity (3 ohms max) or open (100K min) at pins listed:	S1 (ARMED)		
		<u>S1 on</u>	<u>S1 off</u>	
		J2-22 and J2-16	Open	Con
		J2-5 and J2-20	Open	Con
		J2-8 and J2-6	Open	Con
		J2-8 and J2-7	Con	Open
		J2-21 and J2-9	Open	Con
		J2-21 and J2-10	Con	Open
		J2-22 and J3-17	Open	Open
		S1, S3	Push and hold S3 for next reading J2-22 and J3-17 J2-5 and J2-17	Con
Open	Open			
S1, S4	Push and hold S4 for next reading J2-5 and J2-17 Leave S1 in off position	Con	Open	
S2	Push switch S2 once to turn S2 indicator on (ARMED) or off	S2 (ARMED)		
		<u>S2 on</u>	<u>S2 off</u>	
		J3-22 and J3-16	Open	Con
		J3-5 and J3-20	Open	Con
		J3-8 and J3-6	Open	Con
		J3-8 and J3-7	Con	Open
		J3-21 and J3-9	Open	Con
		J3-21 and J3-10	Con	Open
		J3-22 and J3-17	Open	Open

233N6203-9, -23, -45, -103, -104, -105, -161, -162, -169,
 -170, -301, -302, -355, -1009, -1023, -1045, -1103, -1104,
 -1105, -1161, -1162, -1169, -1170, -1301, -1302

Functional Test
 Figure 103 (Sheet 1)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
		<u>S2 on</u>	<u>S2 off</u>
S2, S3	Push and hold S3 for the subsequent reading J3-22 and J3-17 J3-5 and J2-17	Con Open	Open Open
S2, S4	Push and hold S4 for next reading J3-5 and J2-17	Con	Open
S1, S2	Push S1 once to on (ARMED) J2-5 and J3-5 J2-22 and J3-22	Con Con	Open Open
S1, S2	Press S1 once to off J2-5 and J3-5 J2-22 and J3-22	Open Open	Open Open
	Disconnect 5v ac from J2-1 Disconnect 5v ac return from J2-2		
	Apply +28v dc to pins J2-3, J3-3, J2-17, and J3-17		
	Momentarily ground the pins which follow:	<u>Indicators on</u>	
S1	J2-12	S1(FWD)	
S2	J3-12	S2(AFT)	
L1	J3-19	L1	
S1, S3	J2-4	S1(FWD), S3	
S2, S4, L1	J3-4	S2(AFT), S4, L1	
K1	J2-23	None	
S3, K1	J2-23 and J2-15	S3	
K2	J3-23	None	
S4, K2	J3-23 and J3-15	S4	

233N6203-9, -23, -45, -103, -104, -105, -161, -162, -169,
-170, -301, -302, -355, -1009, -1023, -1045, -1103, -1104,
-1105, -1161, -1162, -1169, -1170, -1301, -1302

Functional Test
Figure 103 (Sheet 2)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS
S1 S2 L1 S1, S3	Disconnect +28v dc from pins J2-3 and J3-3 Connect pins J2-3, J3-3, J2-15, and J3-15 to ground Momentarily connect +28v dc to the pins which follow: J2-12 J3-12 J3-19 J2-4	<u>Indicators off</u> S1(FWD) S2(AFT) L1 S1(FWD), S3
S2, S4, L1 S3 S4	J3-4 J2-23 J3-23 Remove all connections	S2(AFT), S4, L1 S3 S4
CR1 CR2	Measure resistance between the specified pins: (Forward Diode Test) (+)J2-11 and J2-21 (+)J3-11 and J3-21	50 ohms max 50 ohms max
CR1 CR2	(Reverse Diode Test) (+)J2-21 and J2-11 (+)J3-21 and J3-11	100K min 100K min
S3	J2-31 and J2-18 J2-31 and J2-30	S3 S3 <u>Released</u> <u>Pushed and Held</u> Con Open Open Con

233N6203-9, -23, -45, -103, -104, -105, -161, -162, -169,
-170, -301, -302, -355, -1009, -1023, -1045, -1103, -1104,
-1105, -1161, -1162, -1169, -1170, -1301, -1302

Functional Test
Figure 103 (Sheet 3)

26-15-51

TESTING & TROUBLE SHOOTING
01.1 Page 118
Jul 01/03

233N6100
 DASH NUMBER LIMITED
 233N6203
 DASH NUMBERS LIMITED

 **BOEING**
 COMPONENT
 MAINTENANCE MANUAL

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
S4	J3-31 and J3-18 J3-31 and J3-30	S4 <u>Released</u> Con Open	S4 <u>Pushed and Held</u> Open Con

233N6203-9, -23, -45, -103, -104, -105, -161, -162, -169,
 -170, -301, -302, -355, -1009, -1023, -1045, -1103, -1104,
 -1105, -1161, -1162, -1169, -1170, -1301, -1302

Functional Test
 Figure 103 (Sheet 4)

26-15-51

TESTING & TROUBLE SHOOTING
 01.1 Page 119
 Jul 01/03

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
S1	Connect 5v ac to pin J2-1 Connect 5v ac return to pin J2-2 Press switch S1 once to turn S1 indicator on (ARMED) or off Measure continuity (3 ohms max) or open (100K min) at the specified pins:	S1 (ARMED)	
	J2-22 and J2-16	<u>S1 on</u> <u>S1 off</u> Open Con	
	J3-22 and J3-16	Open Con	
	J2-8 and J2-6	Open Con	
	J2-8 and J2-7	Con Open	
	J2-10 and J2-9	Open Con	
	J2-10 and J2-21	Con Open	
	J2-22 and J2-17	Open Open	
	S1, S3	Push and hold S3 for the subsequent reading	
		J2-22 and J2-17 J3-22 and J3-17	Con Open Open Open
S1, S4	Push and hold S4 for the subsequent reading		
	J3-22 and J3-17 Leave S1 in off position	Con Open	
S2	Push switch S2 once to turn S2 indicator on (ARMED) or off	S2 (ARMED)	
	J3-5 and J3-20	<u>S2 on</u> <u>S2 off</u> Open Con	
	J2-5 and J2-20	Open Con	
	J3-8 and J3-6	Open Con	
	J3-8 and J3-7	Con Open	
	J3-10 and J3-9	Open Con	
	J3-10 and J3-21	Con Open	
	J2-5 and J2-17	Open Open	

233T6100-19, -21, -27, -42 (with 233N6203-53 or -191),
-43 (with 233N6203-56 or -192), -56;
233N6203-13, -21, -24, -53, -56, -82, -187, -188, -191, -192, -200, -221, -1013,
-1021, -1024, -1053, -1056, -1082, -1187, -1189, -1191, -1192, -1200, -1221

Functional Test
Figure 104 (Sheet 1)

26-15-51

TESTING & TROUBLE SHOOTING
01.1 Page 120
Jul 01/03

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
		<u>S2 on</u>	<u>S2 off</u>
S2, S3	Push and hold S3 for the subsequent reading J2-5 and J2-17 J3-5 and J3-17	Con Open	Open Open
S2, S4	Push and hold S4 for subsequent reading J3-5 and J3-17	Con	Open
S1, S2	Push S1 once to on (ARMED) J3-5 and J3-22 J2-5 and J2-22	Con Con	Open Open
S1, S2	Press S1 once to off J2-5 and J2-22 J3-5 and J3-22	Open Open	Open Open
	Disconnect 5v ac from J2-1 Disconnect 5v ac return from J2-2		
	Apply +28v dc to pins J2-3, J3-3, J2-17, and J3-17		
	Momentarily ground the pins which follow:	<u>Indicators on</u>	
S1	J2-12	S1(FWD)	
S2	J3-12	S2(AFT)	
L1	J3-19	L1	
L2	*[4] J2-19	L2	
S1, S3	*[5] J2-4	S1(FWD), S3	
S1, S3, L2	*[4] J2-4	S1(FWD), S3, L2	
S2, S4, L1	J3-4	S2(AFT), S4, L1	
K1	J2-23	None	
S3, K1	J2-23 and J2-15	S3	
K2	J3-23	None	
K2, S4	J3-23 and J3-15	S4	

233T6100-19, -21, -27, -42 (with 233N6203-53 or -191),
-43 (with 233N6203-56 or -192), -56;
233N6203-13, -21, -24, -53, -56, -82, -187, -188, -191, -192, -200, -221, -1013,
-1021, -1024, -1053, -1056, -1082, -1187, -1189, -1191, -1192, -1200, -1221

Functional Test
Figure 104 (Sheet 2)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS
	Disconnect +28v dc from pins J2-3 and J3-3 Connect pins J2-3, J3-3, J2-15, and J3-15 to ground Momentarily connect +28v dc to the pins which follow:	<u>Indicators off</u>
S1	J2-12	S1(FWD)
S2	J3-12	S2(AFT)
L1	J3-19	L1
L2	*[4] J2-19	L2
S1, S3	*[5] J2-4	S1(FWD), S3
S1, S3, L2	*[4] J2-4	S1(FWD), S3, L2
S2, S4, L1	J3-4	S2(AFT), S4, L1
S3	J2-23	S3
S4	J3-23	S4
	Remove all connections	
	Measure resistance between the specified pins:	
Wiring	*[6] J2-13 and J2-21	Con
	*[6] J3-13 and J3-21	Con
	(Forward Diode Test)	
CR1	(+)J2-11 and J2-21	50 ohms max
CR2	(+)J3-11 and J3-21	50 ohms max
CR3	*[7] (+)J3-13 and J3-21	50 ohms max
CR4	*[7] (+)J2-13 and J2-21	50 ohms max
	(Reverse Diode Test)	
CR1	(+)J2-21 and J2-11	100K min
CR2	(+)J3-21 and J3-11	100K min
CR3	*[7] (+)J3-21 and J3-13	100K min
CR4	*[7] (+)J2-21 and J2-13	100K min

233T6100-19, -21, -27, -42 (with 233N6203-53 or -191),
 -43 (with 233N6203-56 or -192), -56;
 233N6203-13, -21, -24, -53, -56, -82, -187, -188, -191, -192, -200, -221, -1013,
 -1021, -1024, -1053, -1056, -1082, -1187, -1189, -1191, -1192, -1200, -1221

Functional Test
 Figure 104 (Sheet 3)

26-15-51

TESTING & TROUBLE SHOOTING
 01.1 Page 122
 Jul 01/03

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
S3	J2-31 and J2-18 J2-31 and J2-30 *[4] J3-26 and J3-24	S3 <u>Released</u>	S3 Pushed <u>and Held</u>
		Con Open Open	Open Con Con
S4	J3-31 and J3-18 J3-31 and J3-30 *[4] J3-26 and J3-24	S4 <u>Released</u>	S4 Pushed <u>and Held</u>
		Con Open Open	Open Con Con

*[4] 233T6100-21; 233N6203-21, -1021
*[5] 233T6100-19, -27, -42 (with 233N6203-53, -191), -43 (with 233N6203-56, -192), -56;
233N6203-13, -24, -53, -56, -82, -1013, -1024, -1053, -1056, -1082
*[6] 233T6100-19, -42 (with 233N6203-53, -191); 233N6203-13, -53, -1013, -1053
*[7] 233T6100-21, -27, -43 (with 233N6203-56 or -192), -56;
233N6203-21, -24, -56, -82, -1021, -1024, -1056, -1082
233T6100-19, -21, -27, -42 (with 233N6203-53 or -191),
-43 (with 233N6203-56 or -192), -56;
233N6203-13, -21, -24, -53, -56, -82, -187, -188, -191, -192, -200, -221, -1013,
-1021, -1024, -1053, -1056, -1082, -1187, -1189, -1191, -1192, -1200, -1221
Functional Test
Figure 104 (Sheet 4)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS
S1	Connect 5v ac to pin J2-1	S1 (ARMED) <u>S1 on</u> <u>S1 off</u> Open Con Open Con Con Open Open Con Con Open J2-22 and J2-16 * [8] J3-22 and J3-16 J3-22 and J2-29 J2-8 and J2-6 J2-8 and J2-7 J2-10 and J2-9 J2-10 and J2-21 J2-22 and J2-17 * [9] J3-16 and J2-14 Open Con Con Open Open Open Con Con
	Connect 5v ac return to pin J2-2	
	Push switch S1 once to turn S1 indicator on (ARMED) or off	
	Measure continuity (3 ohms max) or open (100k min) between the specified pins:	
S1, S3	Push and hold S3 for the subsequent reading	Con Open
	Leave S1 in off position	
S2	Push switch S2 once to turn S2 indicator on (ARMED) or off	S2 (ARMED) <u>S2 on</u> <u>S2 off</u> Open Con Open Con Con Open Open Con Con Open Open Con Con Open Open Open Open Open J2-5 and J2-20 * [8] J3-5 and J3-20 J3-5 and J2-29 J3-8 and J3-6 J3-8 and J3-7 J3-10 and J3-9 J3-10 and J3-21 J2-5 and J2-17 * [9] J3-20 and J3-14 Open Con Con Con Con Open Con Open Con Open Con Open Con Open Con Open Con Con

233T6100-36, -47 (with 233N6203-67 or -193), -49, -50, -51 (with 233N6203-75 or -197), -59 (with 233N6203-85 or -202), -60 (with 233N6203-86 or -226);
 233N6203-35, -36, -47, -67, -70, -73, -75, -85, -86, -189, -193, -195, -196, -197, -202, -203, -206, -219, -226, -1035, -1036, -1047, -1067, -1070, -1073, -1075, -1085, -1086, -1189, -1193, -1195, -1196, -1197, -1202, -1203, -1206, -1219, -1226

Functional Test
Figure 105 (Sheet 1)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
		<u>S2 on</u>	<u>S2 off</u>
S2, S3	Push and hold S3 for next reading J2-5 and J2-17	Con	Open
S1, S2	Push S1 once to on (ARMED) J2-22 and J2-5	Con	Open
S1, S2	Push S1 once to off J2-22 and J2-5	Open	Open
	Disconnect 5v ac from J2-1 Disconnect 5v ac return from J2-2 Connect +28v dc to pins J2-3, J3-3, J2-17, and J3-17 Momentarily ground the pins which follow:	<u>Indicators on</u>	
S1	J2-12	S1(FWD)	
S2	J3-12	S2(AFT)	
L1	J3-19	L1	
L2	*[10] *[11] J2-19	L2	
S1, S3, L2	*[10] J2-4	S1(FWD), S3, L2	
S1	*[12] J2-4	S1(FWD)	
S1, L2	*[11] J2-4	S1(FWD), L2	
S1, S3	*[13] J2-4	S1(FWD), S3	
S2, L1	J3-4	S2(AFT), L1	
K1	J2-23	None	
S3, K1	J2-23 and J2-15	S3	
K2	J3-23	None	
S3, K2	J3-23 and J3-15	S3	

233T6100-36, -47 (with 233N6203-67 or -193), -49, -50, -51 (with 233N6203-75 or -197), -59 (with 233N6203-85 or -202), -60 (with 233N6203-86 or -226);
233N6203-35, -36, -47, -67, -70, -73, -75, -85, -86, -189, -193, -195, -196,
-197, -202, -203, -206, -219, -226, -1035, -1036, -1047, -1067, -1070,
-1073, -1075, -1085, -1086, -1189, -1193, -1195, -1196, -1197, -1202,
-1203, -1206, -1219, -1226

Functional Test
Figure 105 (Sheet 2)

26-15-51

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS
	Disconnect +28v dc from pins J2-3, and J3-3 Connect pins J2-3, J3-3, J2-15, and J3-15 to ground Momentarily connect +28v dc to the pins which follow:	<u>Indicators off</u>
S1	J2-12	S1(FWD)
S2	J3-12	S2(AFT)
L1	J3-19	L1
L2	*[10] *[11] J2-19	L2
S1, S3, L2	*[10] J2-4	S1(FWD), S3, L2
S1	*[12] J2-4	S1(FWD)
S1, L2	*[11] J2-4	S1(FWD), L2
S1, S3	*[12] J2-4	S1(FWD), S3
S2, L1	J3-4	S2(AFT), L1
S3	J2-23	S3
S3	J3-23	S3
	Remove all connections	
	Measure resistance between the specified pins:	
Wiring	*[15] J2-13 and J2-21	Con
	*[15] J3-13 and J3-21	Con
	(Forward Diode Test)	
CR1	(+)J2-11 and J2-21	50 ohms max
CR2	(+)J3-11 and J3-21	50 ohms max
CR3	*[14] (+)J3-13 and J3-21	50 ohms max
CR4	*[14] (+)J2-13 and J2-21	50 ohms max

233T6100-36, -47 (with 233N6203-67 or -193), -49, -50, -51 (with 233N6203-75 or -197), -59 (with 233N6203-85 or -202), -60 (with 233N6203-86 or -226);
 233N6203-35, -36, -47, -67, -70, -73, -75, -85, -86, -189, -193, -195, -196, -197, -202, -203, -206, -219, -226, -1035, -1036, -1047, -1067, -1070, -1073, -1075, -1085, -1086, -1189, -1193, -1195, -1196, -1197, -1202, -1203, -1206, -1219, -1226

Functional Tests
 Figure 105 (Sheet 3)

26-15-51

TESTING & TROUBLE SHOOTING
 01.1 Page 126
 Jul 01/03

COMPONENT TESTED	TEST PROCEDURE	NECESSARY RESULTS	
CR1	(Reverse Diode Test) (+)J2-21 and J2-11	100K min	
CR2	(+)J3-21 and J3-11	100K min	
CR3	*[14] (+)J3-21 and J3-13	100K min	
CR4	*[14] (+)J2-21 and J2-13	100K min	
		S3	S3
		<u>Released</u>	<u>Pushed and Held</u>
S3	J2-31 and J2-18	Con	Open
	J2-31 and J2-30	Open	Con
	J3-17 and J2-29	Open	Con
	*[16] J3-26 and J3-24	Open	Con

*[8] All except 233N6203-226, -1226

*[9] 233N6203-226, -1226

*[10] 233T6100-50, -51 (with 233N6203-75, -197), -60 (with 233N6203-86, -226);
233N6203-73, -75, -86, -1073, -1075, -1086

*[11] 233N6203-35, -1035

*[12] 233T6100-36; 233N6203-36, -47, -1036, -1047

*[13] 233T6100-47 (with 233N6203-67, -193), -49, -59 (with 233N6203-85, -202);
233N6203-67, -70, -85, -1067, -1070, -1085

*[14] All except 233T6100-36; 233N6203-36, -1036

*[15] 233T6100-36; 233N6203-36, -1036

*[16] 233T6100-49, -50, -59 (with 233N6203-85, -202), -60 (with 233N6203-86,
-226); 233N6203-70, -73, -85, -86, -1070, -1073, -1085, -1086

233T6100-36, -47 (with 233N6203-67 or -193), -49, -50, -51 (with 233N6203-75
or -197), -59 (with 233N6203-85 or -202), -60 (with 233N6203-86 or -226);
233N6203-35, -36, -47, -67, -70, -73, -75, -85, -86, -189, -193, -195, -196,
-197, -202, -203, -206, -219, -226, -1035, -1036, -1047, -1067, -1070,
-1073, -1075, -1085, -1086, -1189, -1193, -1195, -1196, -1197, -1202,
-1203, -1206, -1219, -1226

Functional Tests
Figure 105 (Sheet 4)

26-15-51

TEST NUMBER	PROCEDURES	REQUIRED RESULTS	SUSPECTED COMPONENT
1	<p>Connect the test plug connector to the fire switch connector.</p> <p>Make sure that the switch handle is pushed in.</p> <p><u>Continuity Test:</u></p> <p>Connect jumper wires between the following pins:</p> <p>2 pin 13 to pin 14</p> <p>3 pin 15 to pin 16</p> <p>4 pin 17 to pin 18</p> <p>5 pin 19 to pin 20</p> <p>6 pin 30 to pin 4</p> <p>7 pin 31 to pin 5</p> <p>8 pin 32 to pin 34</p> <p>9 pin 33 to pin 35</p> <p>10 pin 36 to pin 6</p> <p>11 pin 37 to pin 7</p> <p>12 pin 38 to pin 40</p> <p>13 pin 39 to pin 41</p>		<p>All the step in continuity test check the fire switch</p>
14	<p>Connect a 28VDC lamp (L1) to pin 11 and pin 28.</p>		
15	<p>Connect a 28VDC lamp (L2) to pin 12 and pin 29.</p>		
16	<p>Apply 28VDC to pin 3, and ground to pin 21.</p>	<p>L2 illuminates</p>	

Functional Test for Fire Control Switches
 Figure 105A (Sheet 1)

26-15-51

TEST NUMBER	PROCEDURES	REQUIRED RESULTS	SUSPECTED COMPONENT
17	Push the override button underneath the handle and at the same time, pull the handle out.	L2 goes off and L1 illuminates	
18	Turn and hold the handle counterclockwise (CCW), check continuity between:		
19	pin 22 and pin 23	Continuity	
20	pin 8 and pin 9	Open	
21	Release the handle.	Verify the handle returns to about 10 degree toward the center	
22	Check continuity between pin 22 and pin 23.	Open	
23	Turn and hold the handle clockwise (CW), check continuity between:		
24	pin 22 and pin 23	Open	
25	pin 8 and pin 9	Continuity	
26	Release the handle.	Verify the handle returns to about 10 degrees toward the center	
27	Check continuity between pin 8 and pin 9.	Open	


Functional Test for Fire Control Switches
Figure 105A (Sheet 2)

26-15-51

TEST NUMBER	PROCEDURES	REQUIRED RESULTS	SUSPECTED COMPONENT
28	Return the handle to center position and check the continuity between:		
29	pin 22 and pin 23	Open	
30	pin 8 and pin 9	Open	
31	Push the handle in.	L1 goes off and L2 illuminates	
	<u>Lighting Test:</u>		
32	Apply 26+/-1 VDC to pin 1 and ground pin 2.	Handle Lamps illuminate	Handle Lamps
	<u>Solenoid Test:</u>		
33	Apply 28VDC to pin 10 and ground to pin 25.	Verify the handle is unlocked by pulling the handle out and pushing it back in	Solenoid
34	Apply 28VDC to pin 25 and ground to pin 10.	Verify the handle is unlocked by pulling the handle out and pushing it back in	Solenoid
35	Disconnect all power supply.	Without depressing the override button, verify that the handle is locked by pulling on the handle	Solenoid
36	End of fire control switch test		

Functional Test for Fire Control Switches
Figure 105A (Sheet 3)

26-15-51


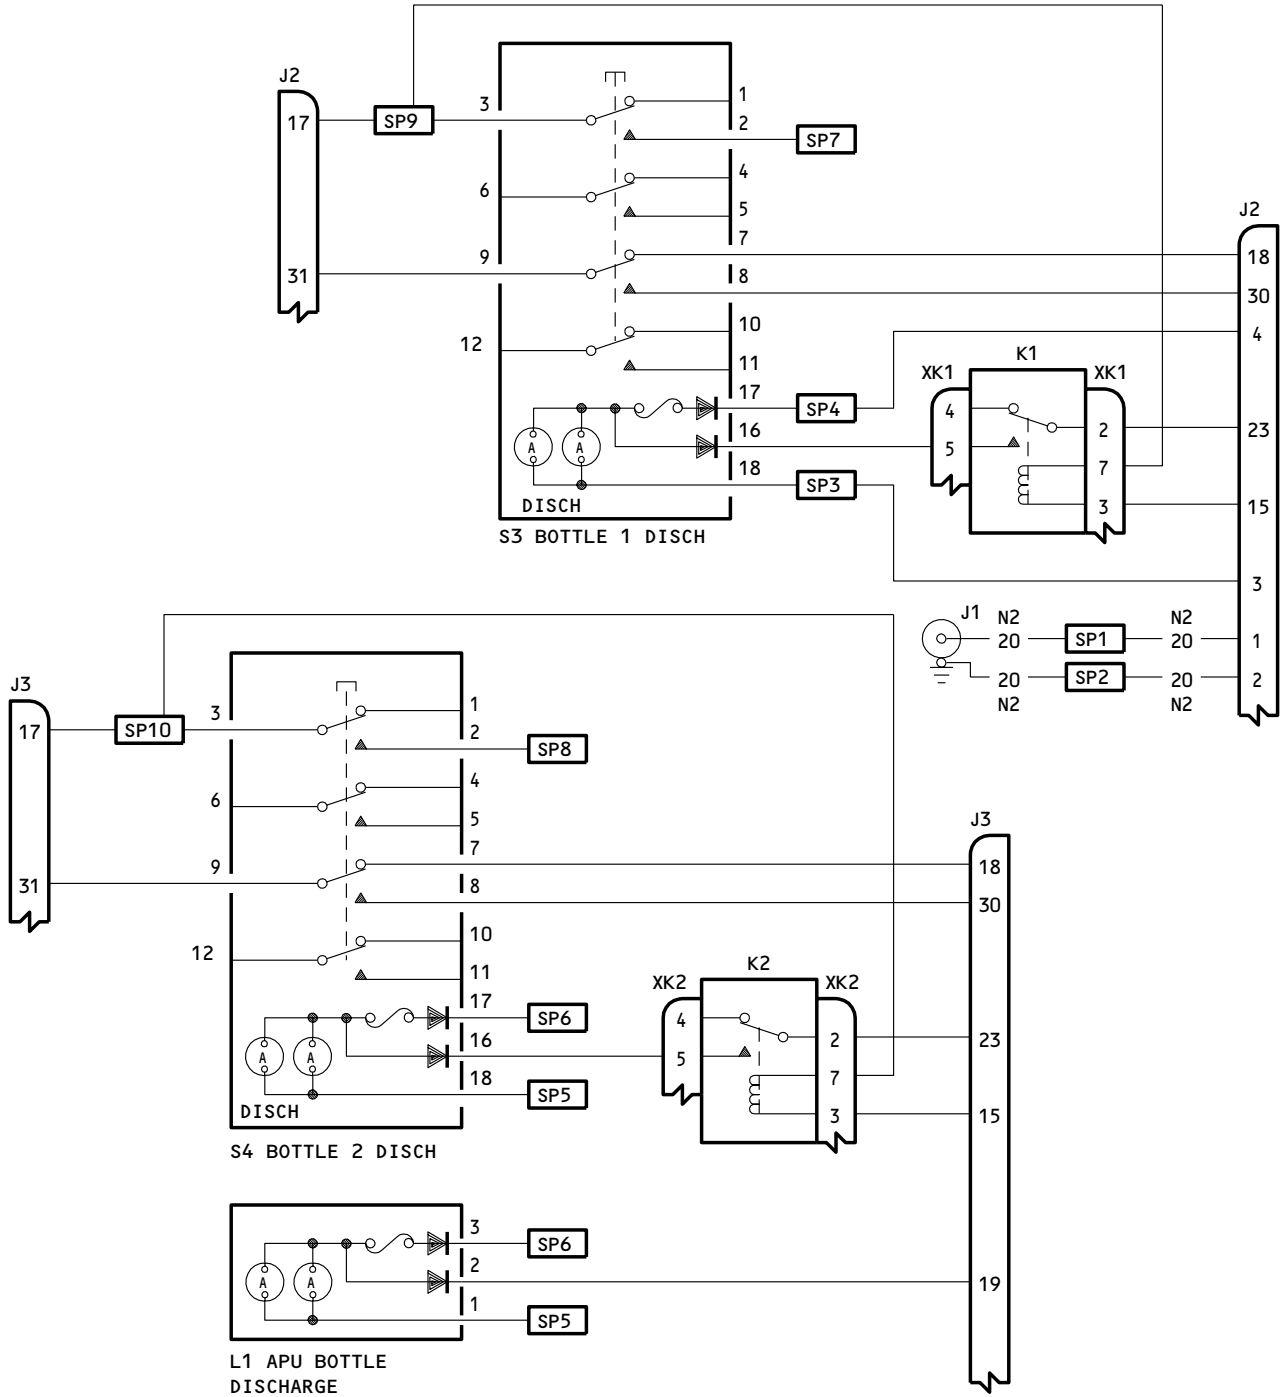


1 233T6100-39 WITH 233N6203-48 OR -190 INSTALLED

233N6203-7, -48, -190, -194, -1007, -1048, -1190, -1194, -1347, -1400
 233T6100-9, -39 1

Schematic Diagram
 Figure 106 (Sheet 2)

26-15-51

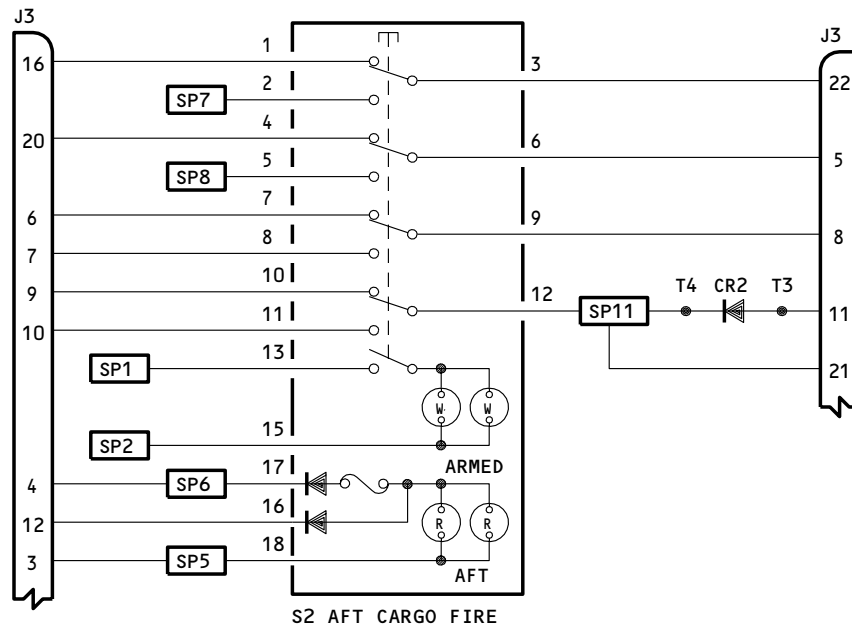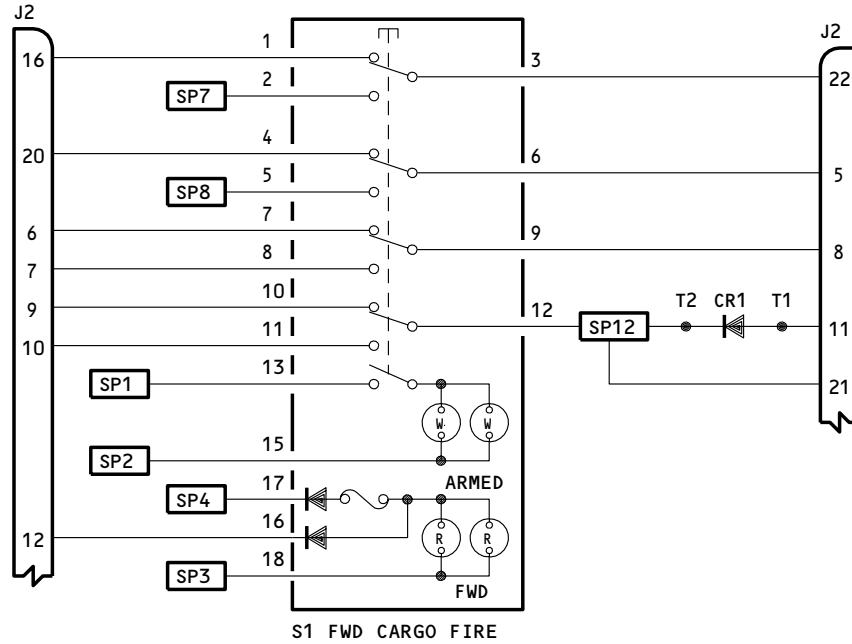


NOTE: ALL WIRE BMS 13-16, TYPE 1, CLASS 1, SIZE AWG 20

SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR)

233N6203-9,-23,-45,-103,-104,-105,-161,-162,-169,-170,-301,-302,-355,
 -1009,-1023,-1045,-1103,-1104,-1105,-1161,-1162,-1169,-1170,-1301,-1302

Schematic Diagram
 Figure 107 (Sheet 1)


26-15-51

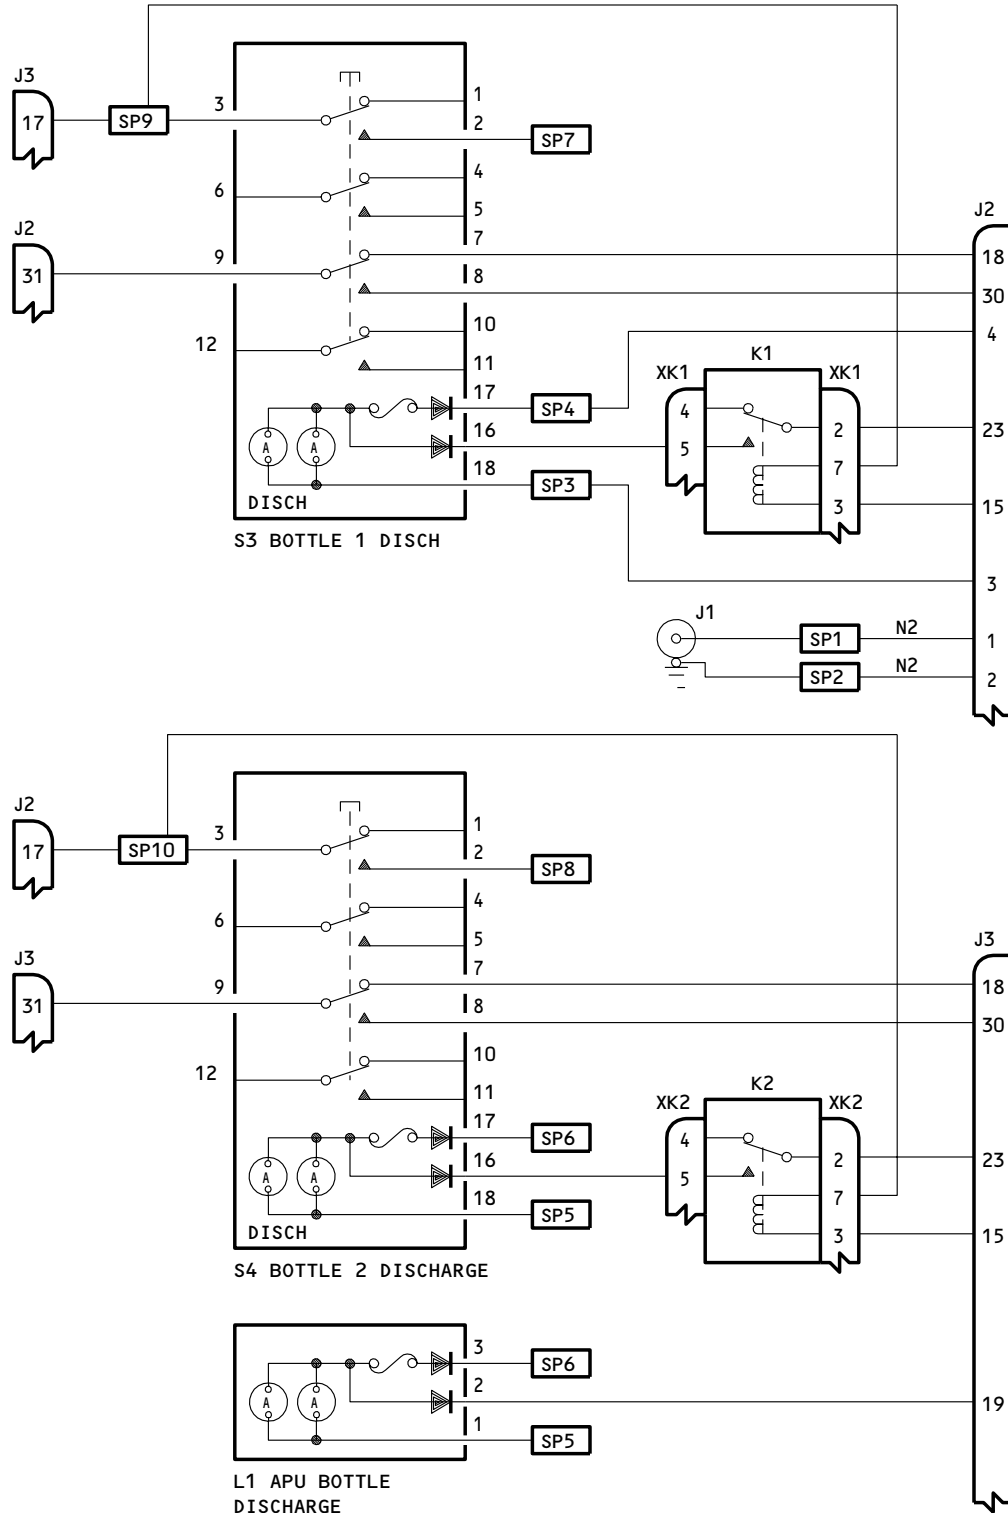

233N6203-9,-23,-45,-103,-104,-105,-161,-162,-169,-170,-301,-302,-355,-1009,-1023,
 -1045,-1103,-1104,-1105,-1161,-1162,-1169,-1170,-1301,-1302

Schematic Diagram
 Figure 107 (Sheet 2)


26-15-51

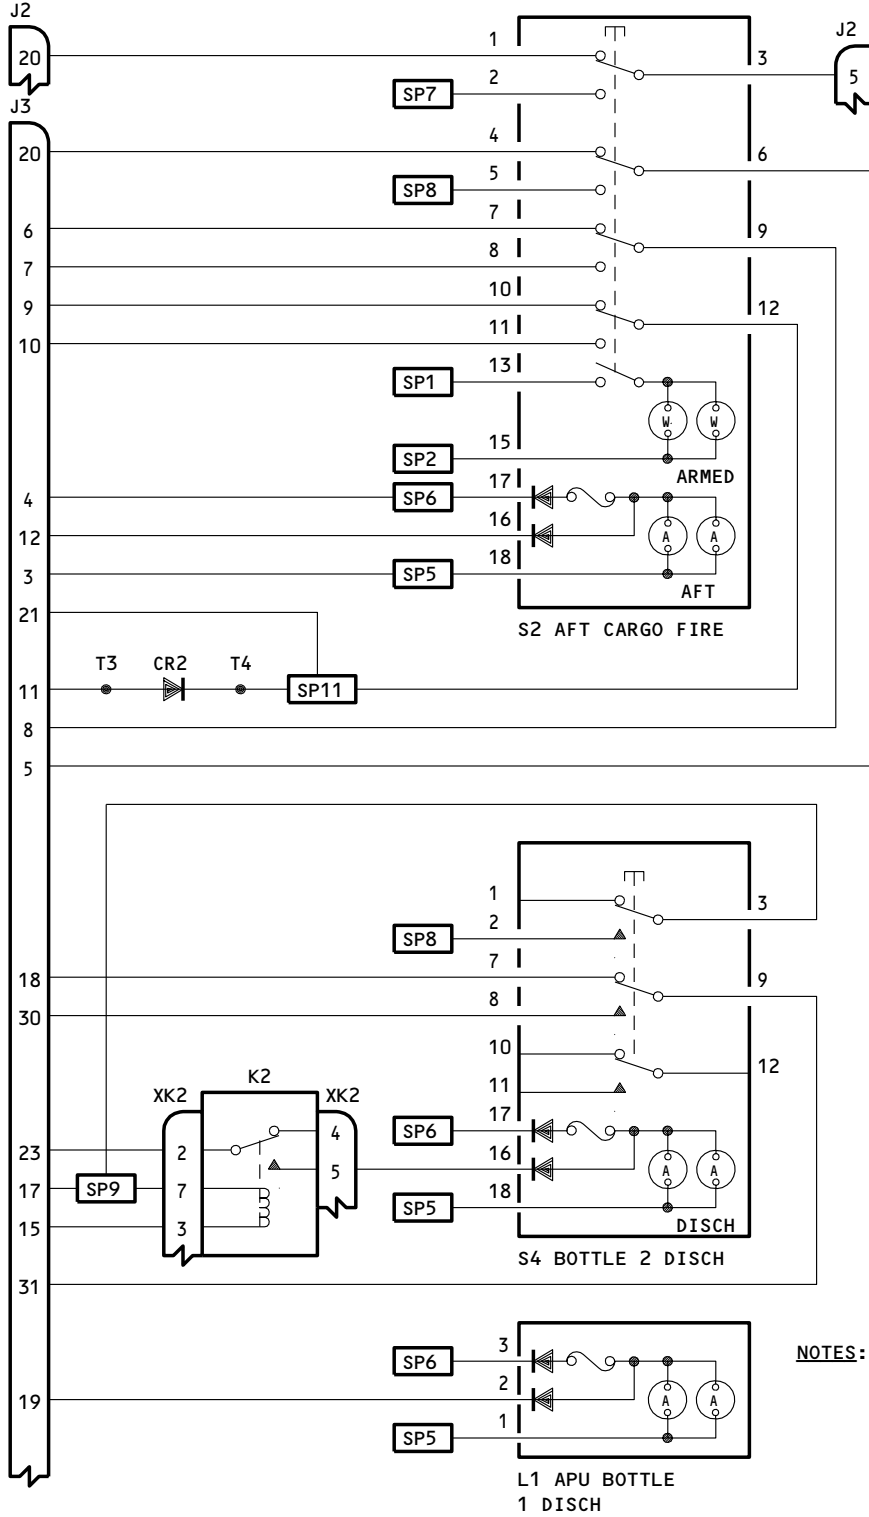

NOTES: ALL WIRE BMS 13-16, TYPE I, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.
 SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

233N6203-12,-77,-109,-111,-163,-165,-172,-220,-303,-305,-360,-1012,-1077,-1109,
 -1111,-1163,-1165,-1172,-1220,-1303,-1305 and 233T6100-15
 Schematic Diagram
 Figure 108 (Sheet 1)


26-15-51

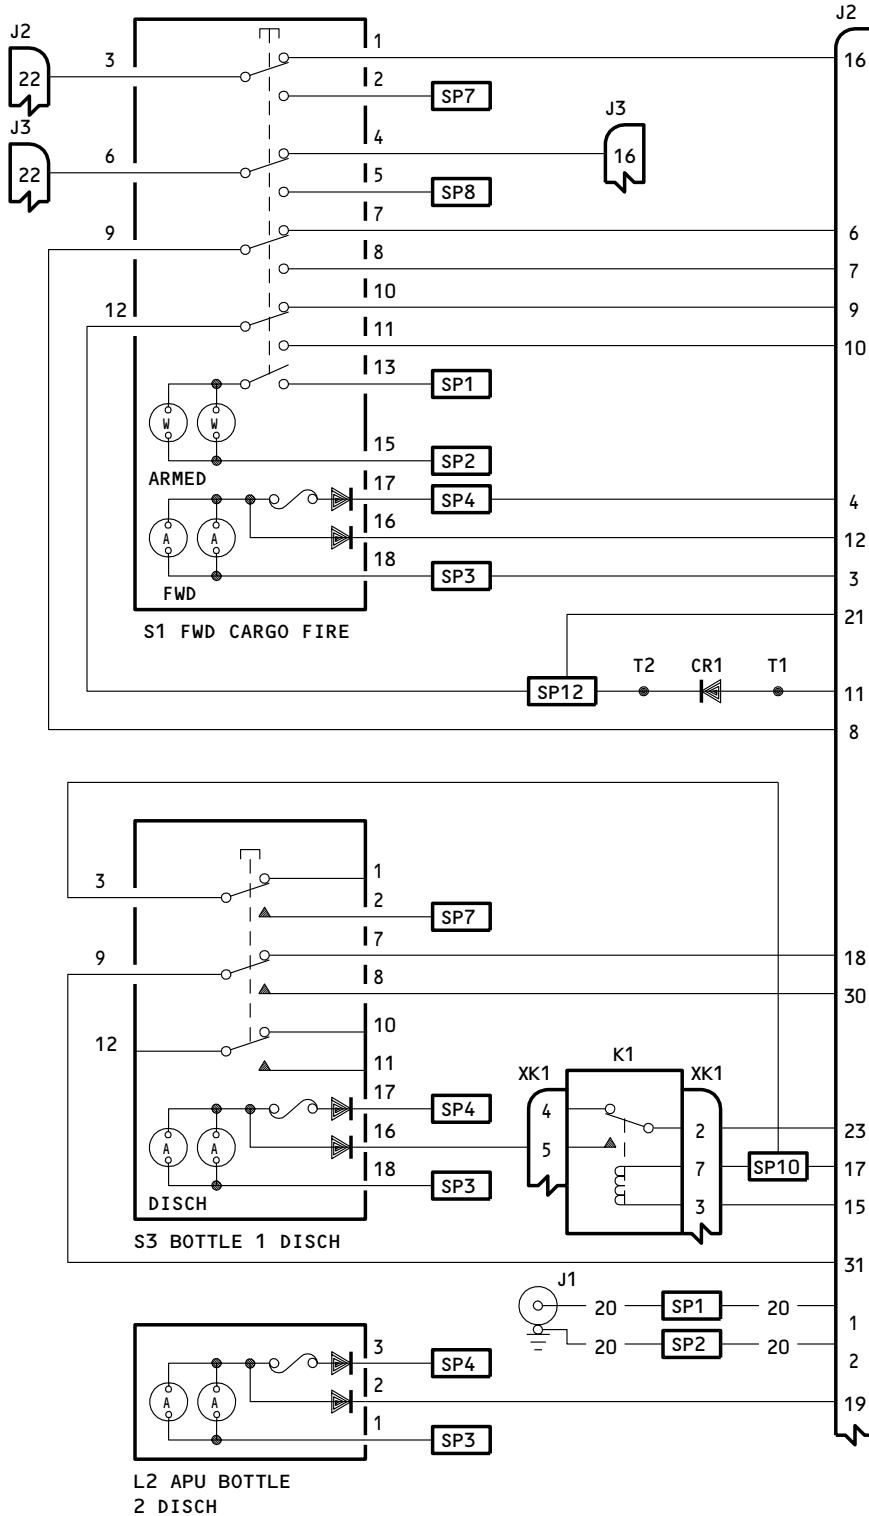

233N6203-12,-77,-109,-111,-163,-165,-172,-220,-303,-305,-360,-1012,-1077,-1109,
 -1111,-1163,-1165,-1172,-1220,-1303,-1305 and 233T6100-15

Schematic Diagram
 Figure 108 (Sheet 2)

26-15-51

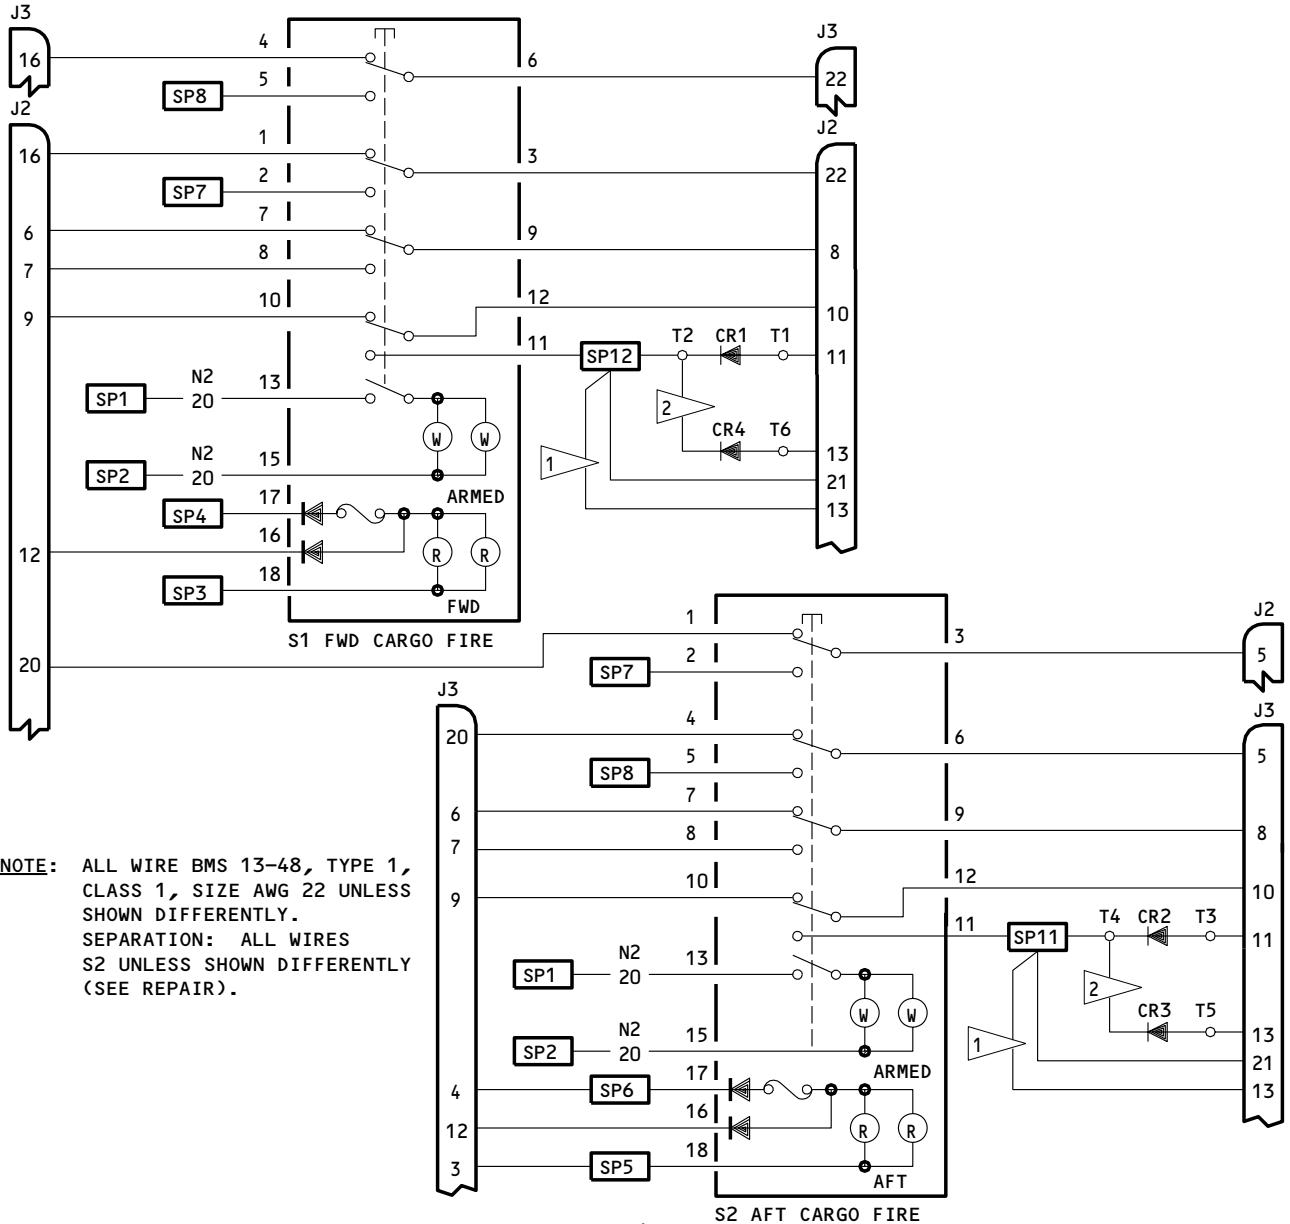

NOTE: ALL WIRE BMS 13-48, TYPE 1, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.
SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).


- 1 233N6203-13,-53,-188,-221,-1013,-1053,-1188,-1221,-1348
233T6100-19,-42 W/ 233N6203-53
- 2 233N6203-24,-56,-191,-192,-1024,-1056,-1191,-1192,-1349,-1401,-1402
233T6100-27,-43 W/ 233N6203-56,-191 OR -192

- 3 233T6100-42 W/ 233N6203-53 OR -191 INSTALLED
- 4 233T6100-43 W/ 233N6203-56 OR -192 INSTALLED

233N6203-13,-24,-53,-56,-188,-191,-192,-221,-1013,-1024,-1053,-1056,-1188,-1191,-1192,-1221,-1348,-1349,-1401,-1402
233T6100-19,-27,-42, 3 , -43 4

Schematic Diagram
Figure 109 (Sheet 1)

26-15-51

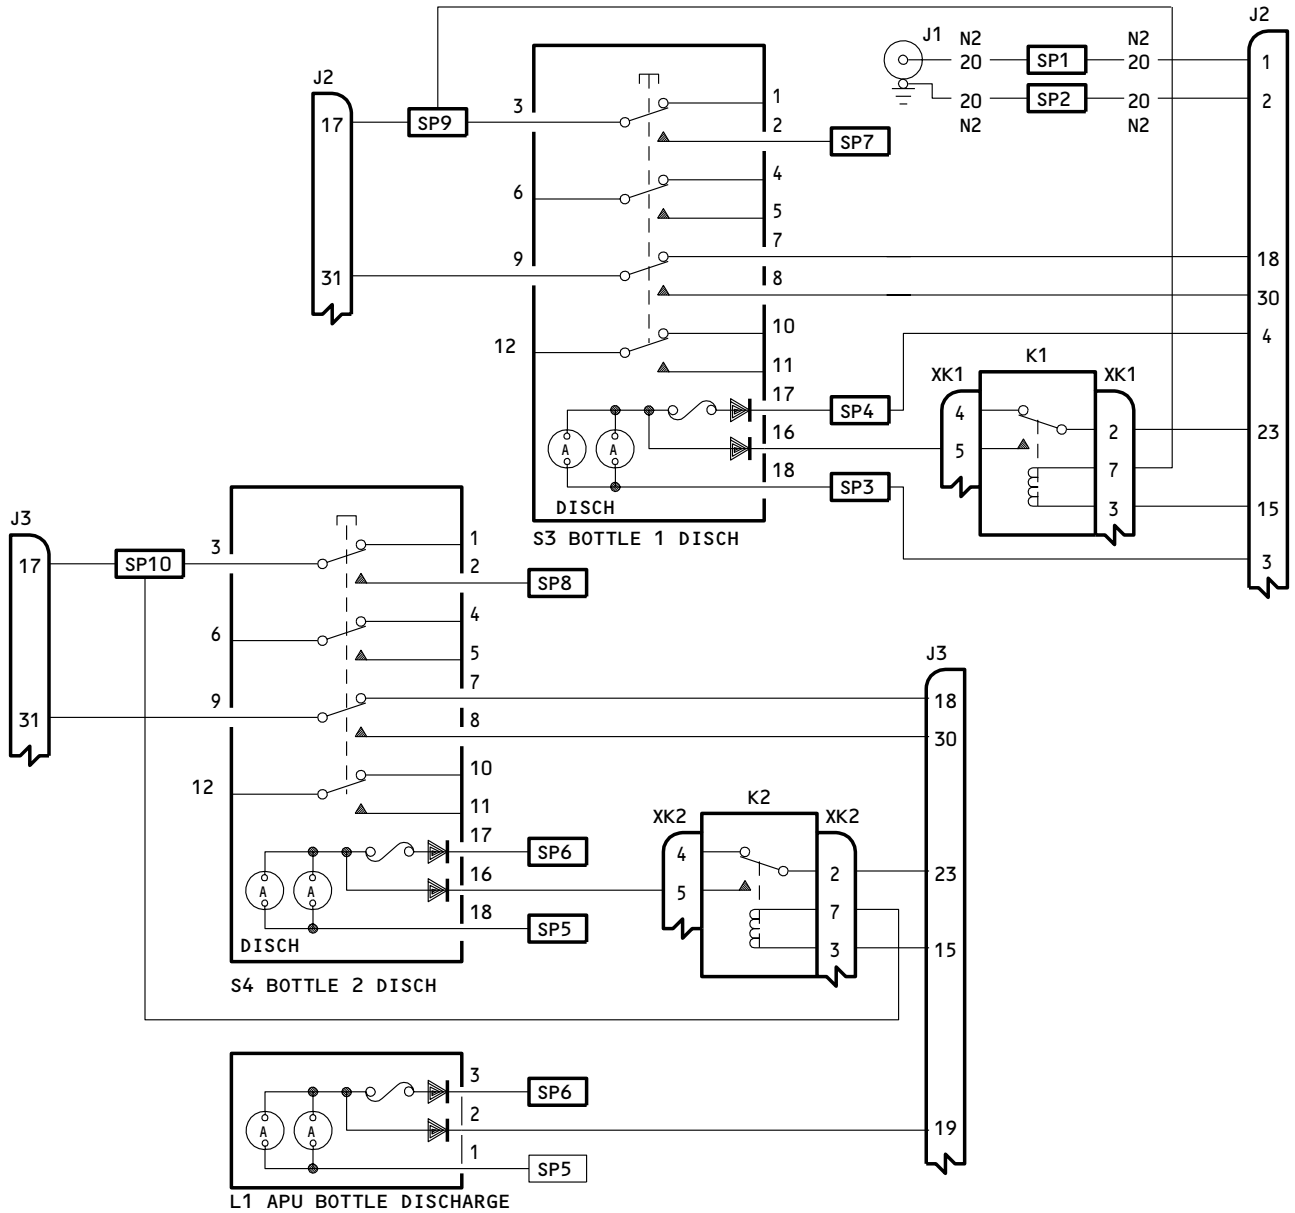


- 1 233N6203-13,-53,-188,-221,-1013,-1053,-1188,-1221,-1348
233T6100-19,-42 W/ 233N6203-53
- 2 233N6203-24,-56,-191,-192,-1024,-1056,-1191,-1192,-1349,-1401,-1402
233T6100-27,-43 W/ 233N6203-56,-191 OR -192

- 3 233T6100-42 W/ 233N6203-53 OR -191 INSTALLED
- 4 233T6100-43 W/ 233N6203-56 OR -192 INSTALLED

233N6203-13,-24,-53,-56,-188,-191,-192,-221,-1013,-1024,-1053,-1056,-1188,-1191,-1192,-1221,-1348,-1349,-1401,-1402
 233T6100-19,-27,-42, 3 , -43 4

Schematic Diagram
 Figure 109 (Sheet 2)


26-15-51

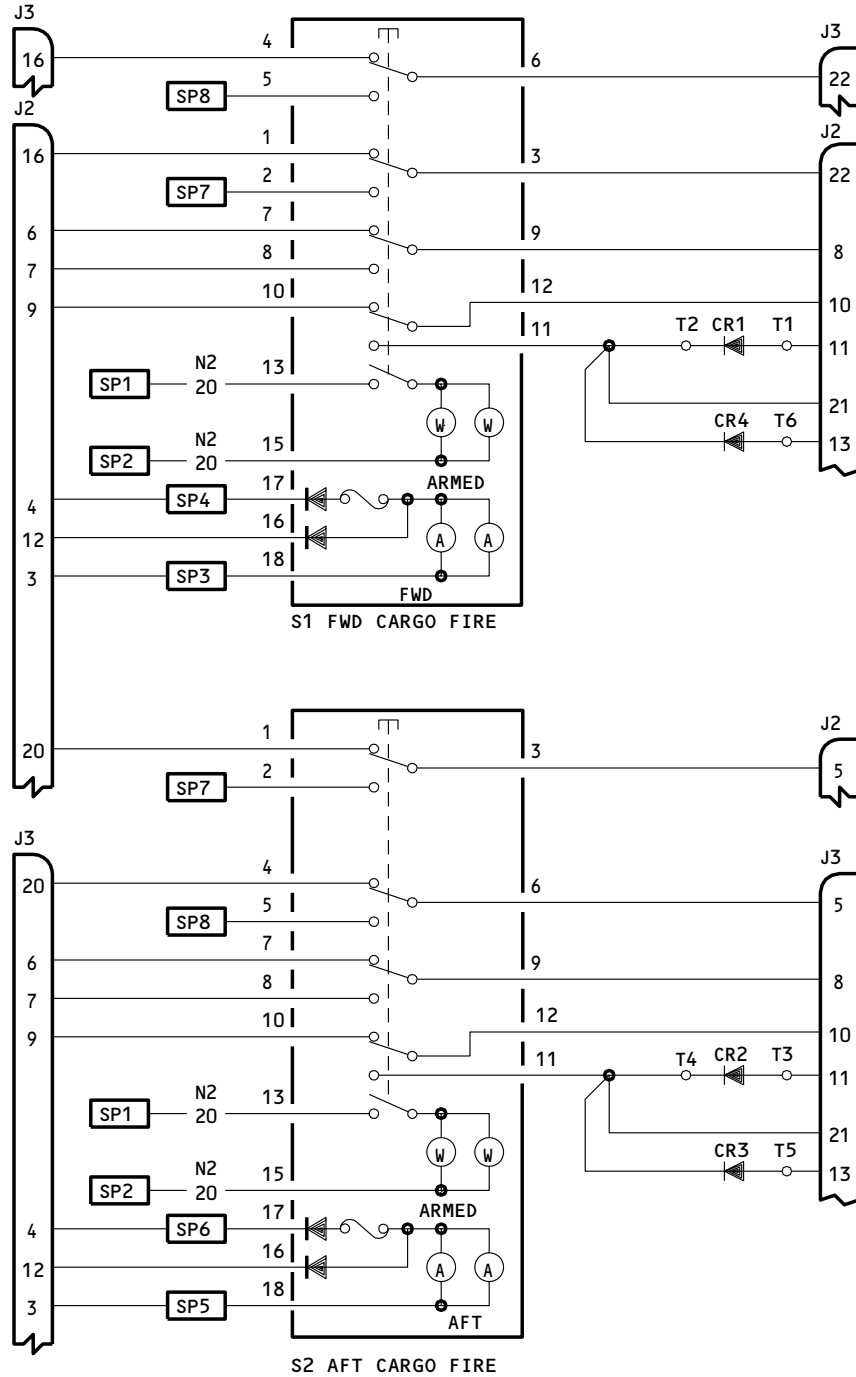

NOTES: ALL WIRE BMS 13-48, TY1, CL1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY
 SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR)

233N6203-21, -187, -1021, -1187
 233T6100-21
 Schematic Diagram
 Figure 110 (Sheet 1)


26-15-51

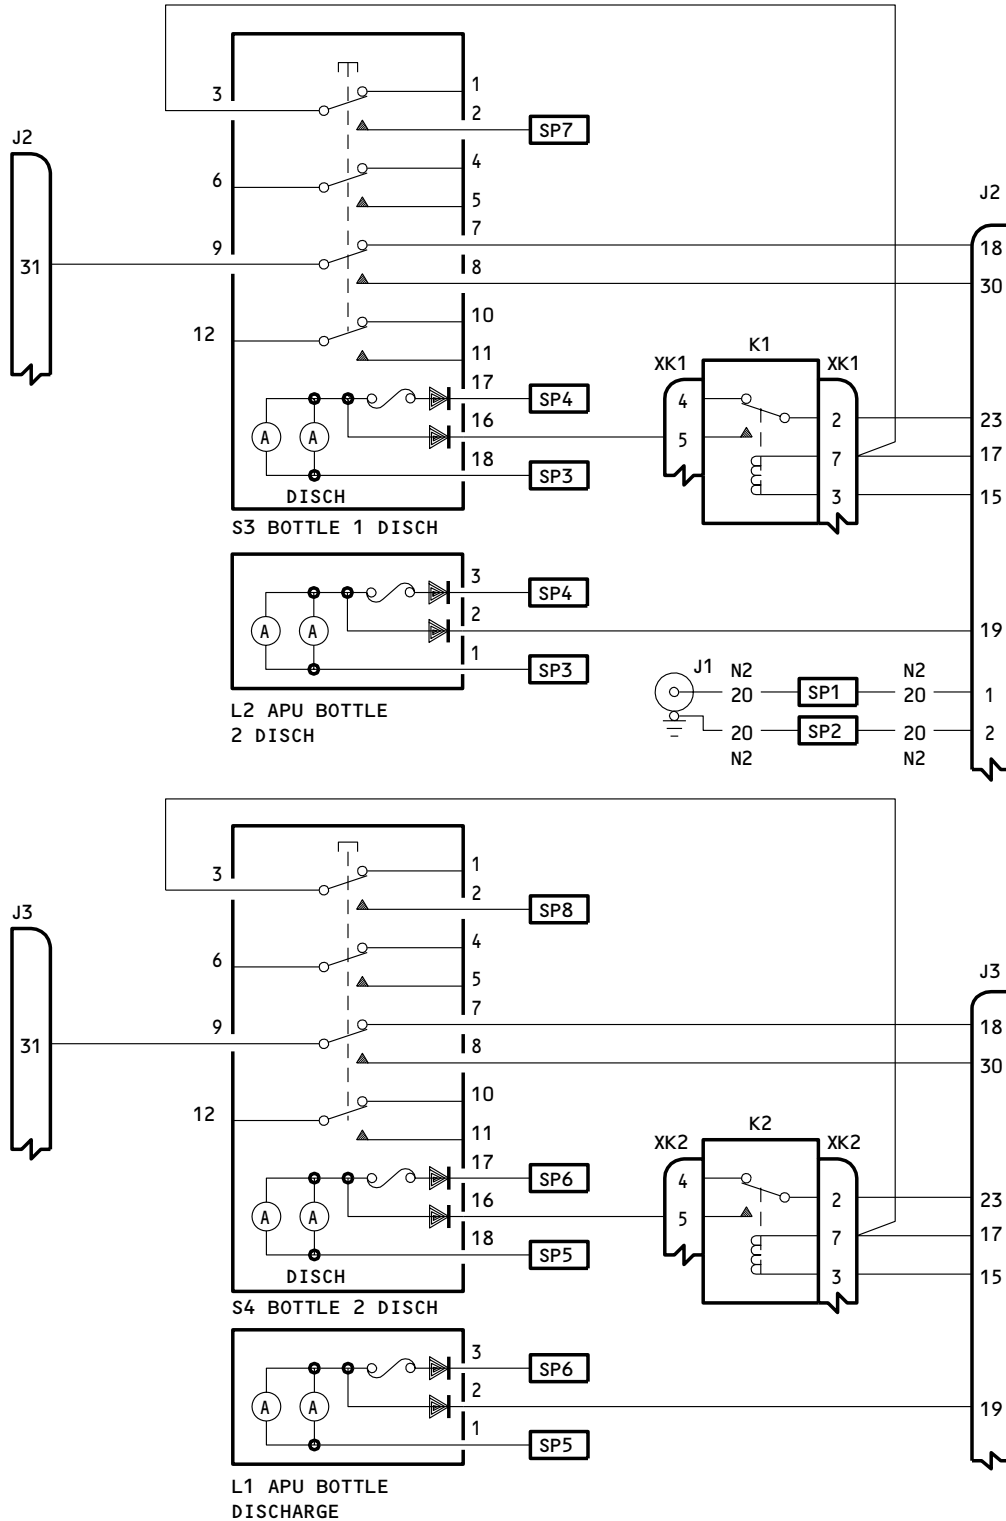

233N6203-21,-187,-1021,-1187
 233T6100-21

Schematic Diagram
 Figure 110 (Sheet 2)


26-15-51

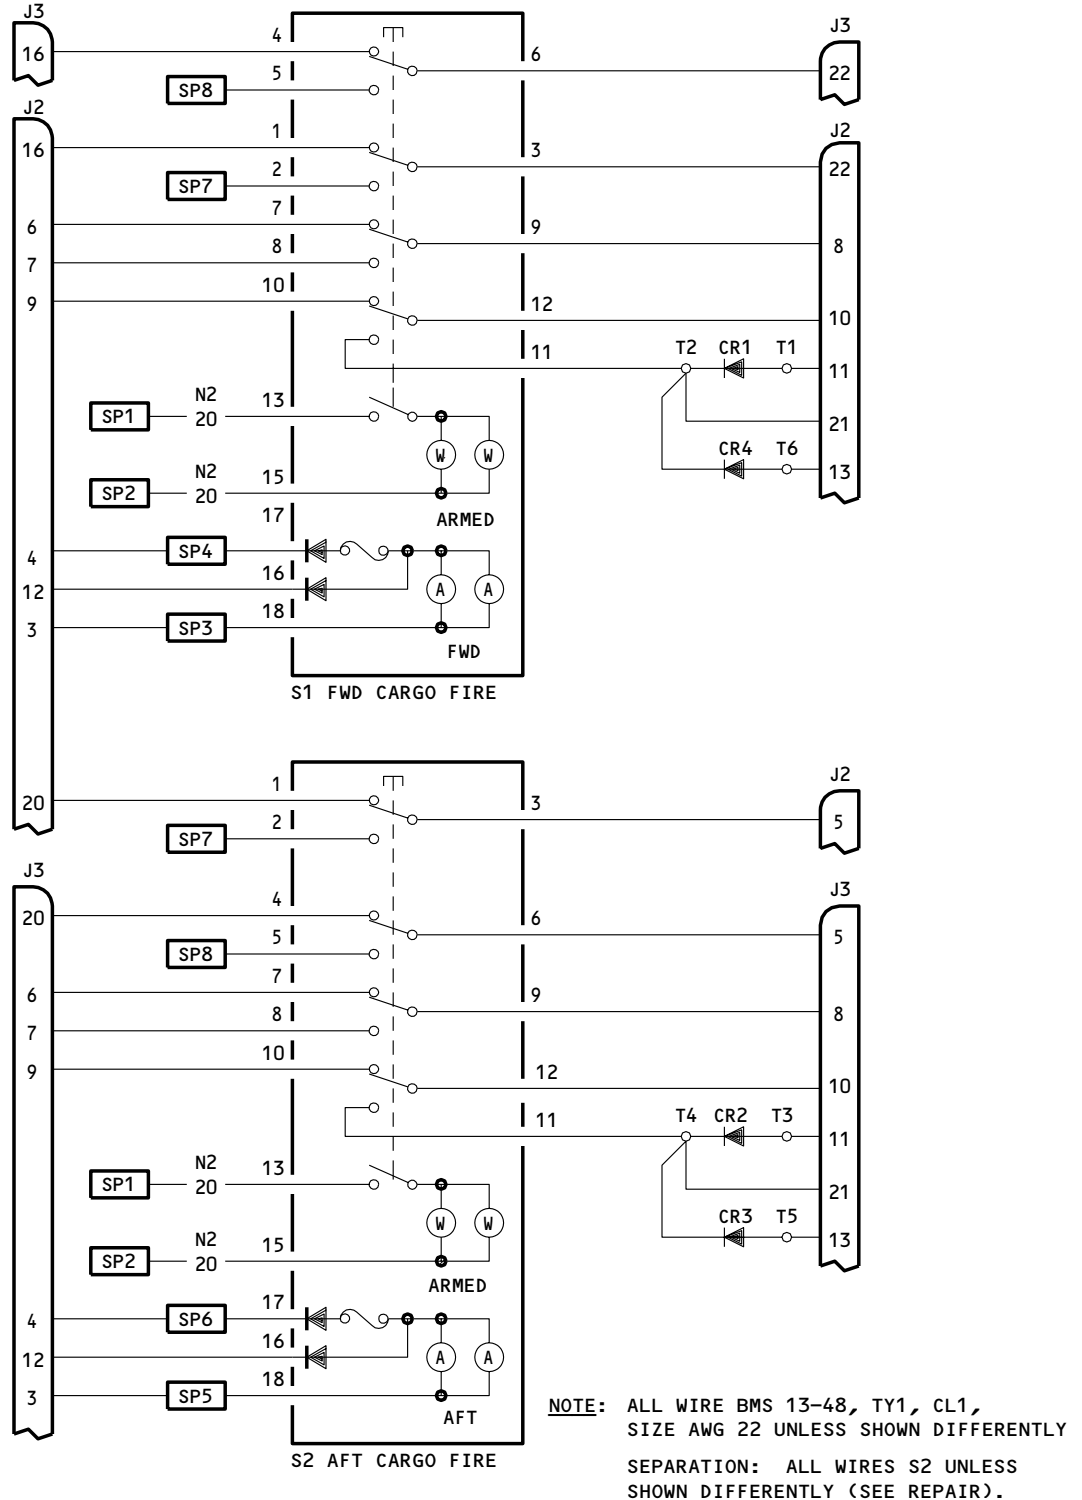

233N6203-82,-200,-1082,-1200,-1356,-1409
 233T6100-56

Schematic Diagram
 Figure 111 (Sheet 1)


26-15-51

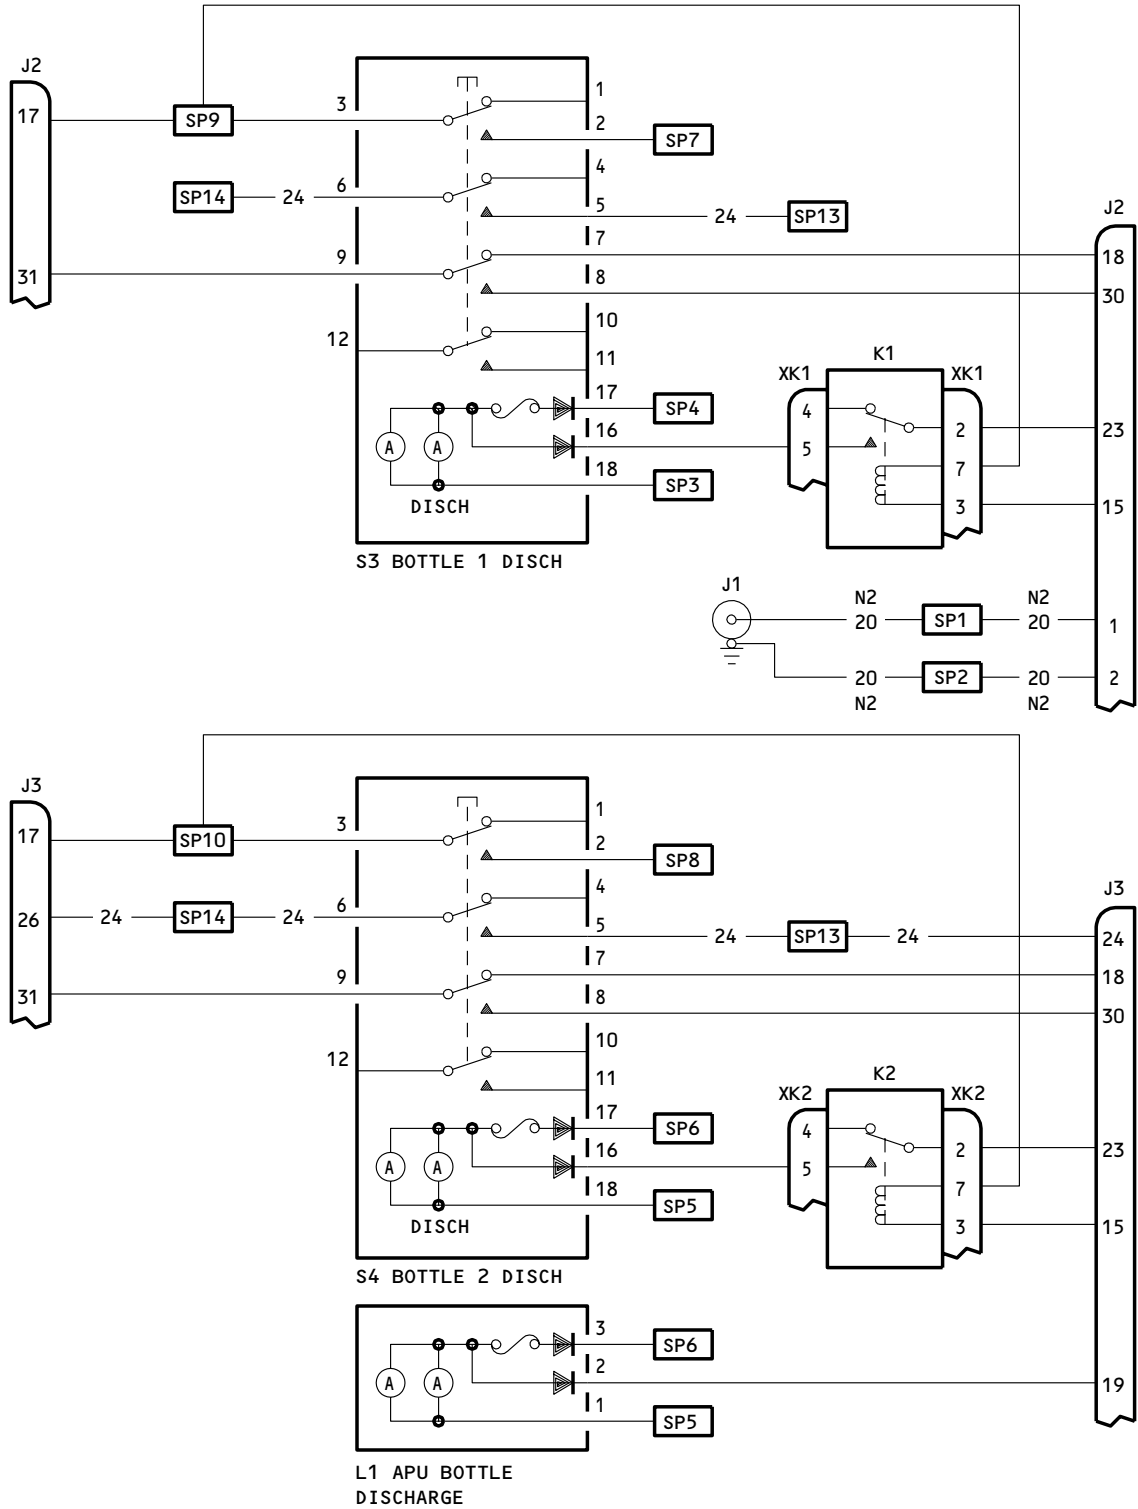

233N6203-82,-200,-1082,-1200,-1356,-1409
 233T6100-56

Schematic Diagram
 Figure 111 (Sheet 2)

26-15-51


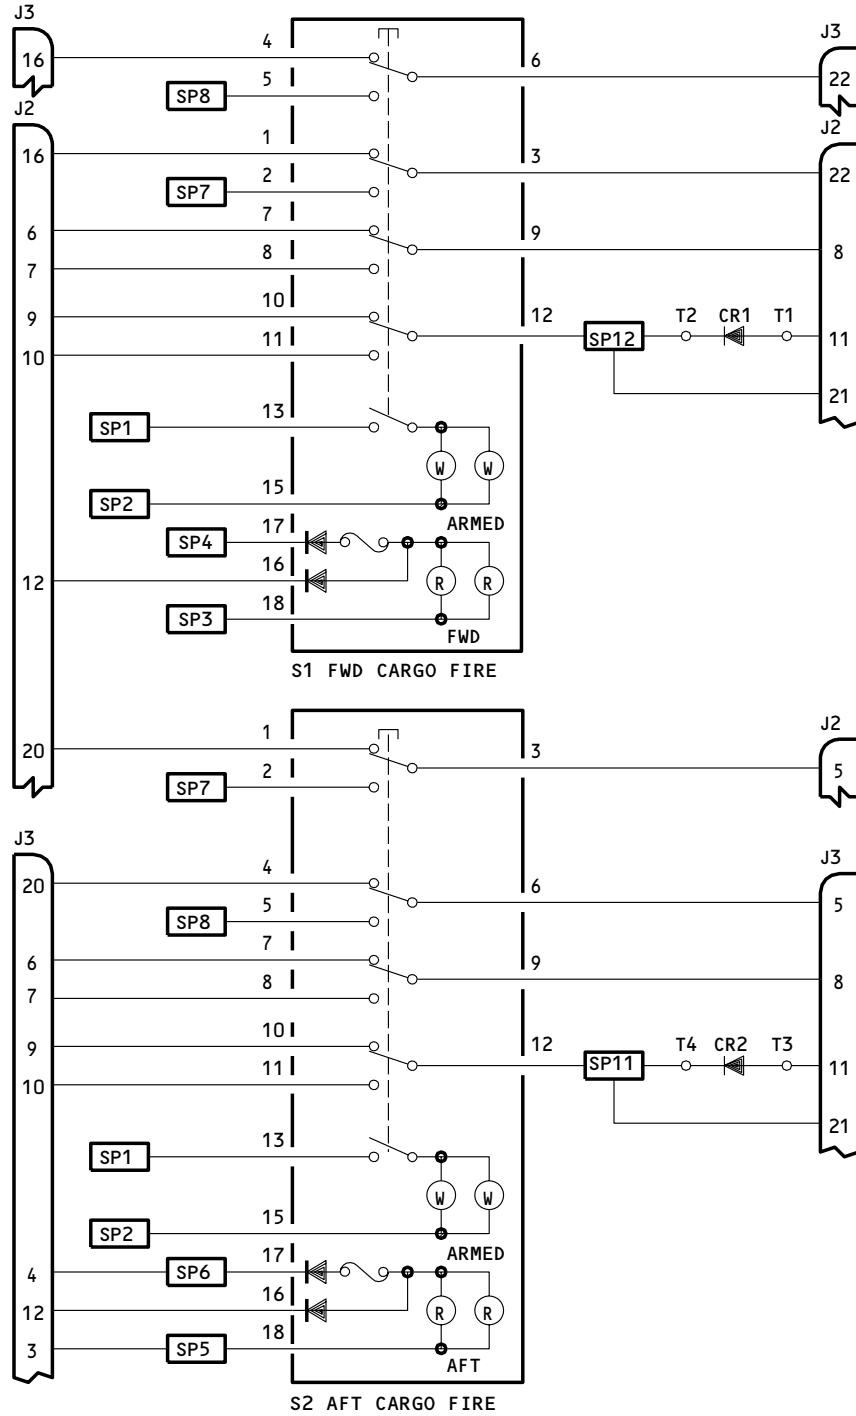


NOTE: ALL WIRE BMS 13-16, TY 1, CL 1, SIZE AWG 20.

SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).


233N6203-32,-46,-110,-164,-171,-304,-356,-1032,-1046,-1110,-1164,-1171,-1304
 Schematic Diagram
 Figure 112 (Sheet 1)

26-15-51

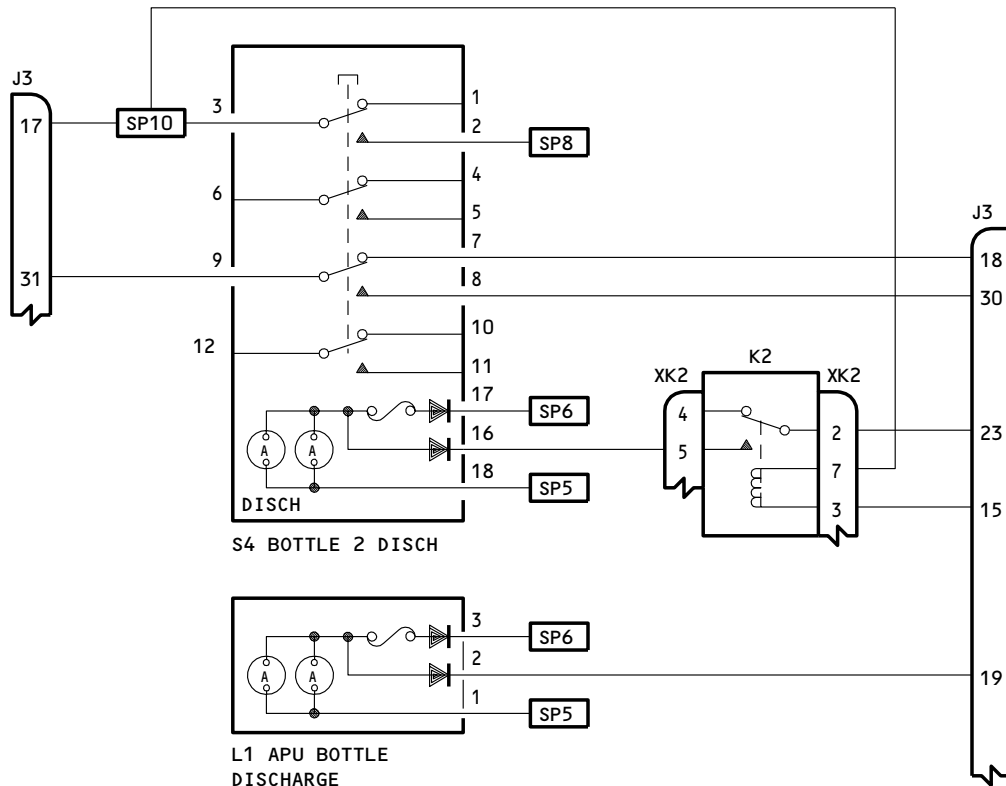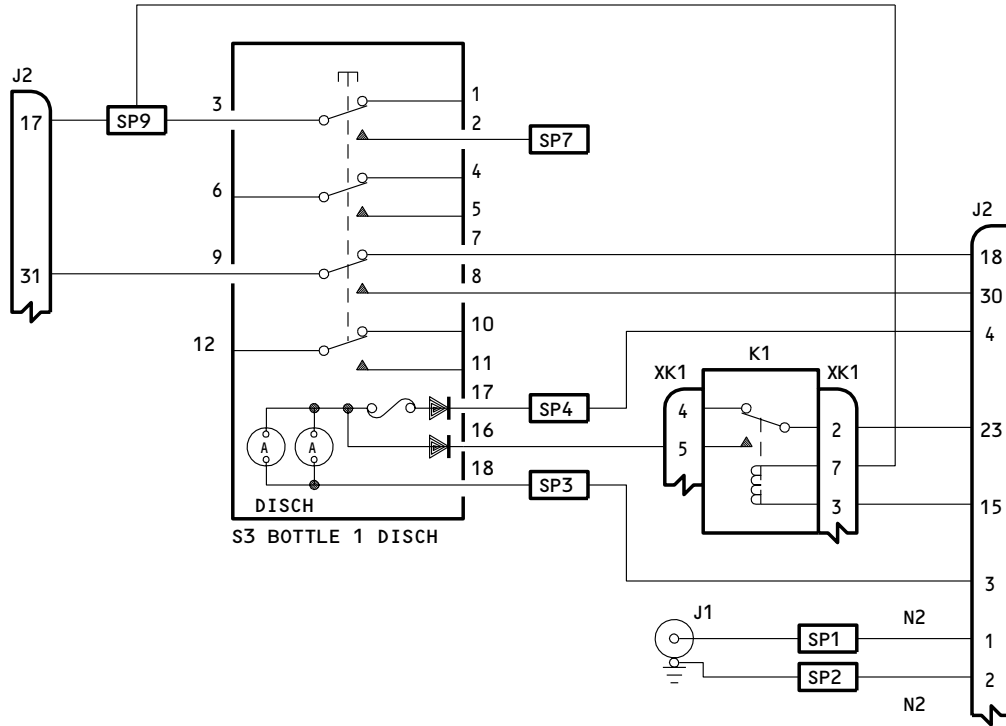

233N6203-32,-46,-110,-164,-171,-304,-356,-1032,-1046,-1110,-1164,-1171,-1304
 Schematic Diagram
 Figure 112 (Sheet 2)

26-15-51

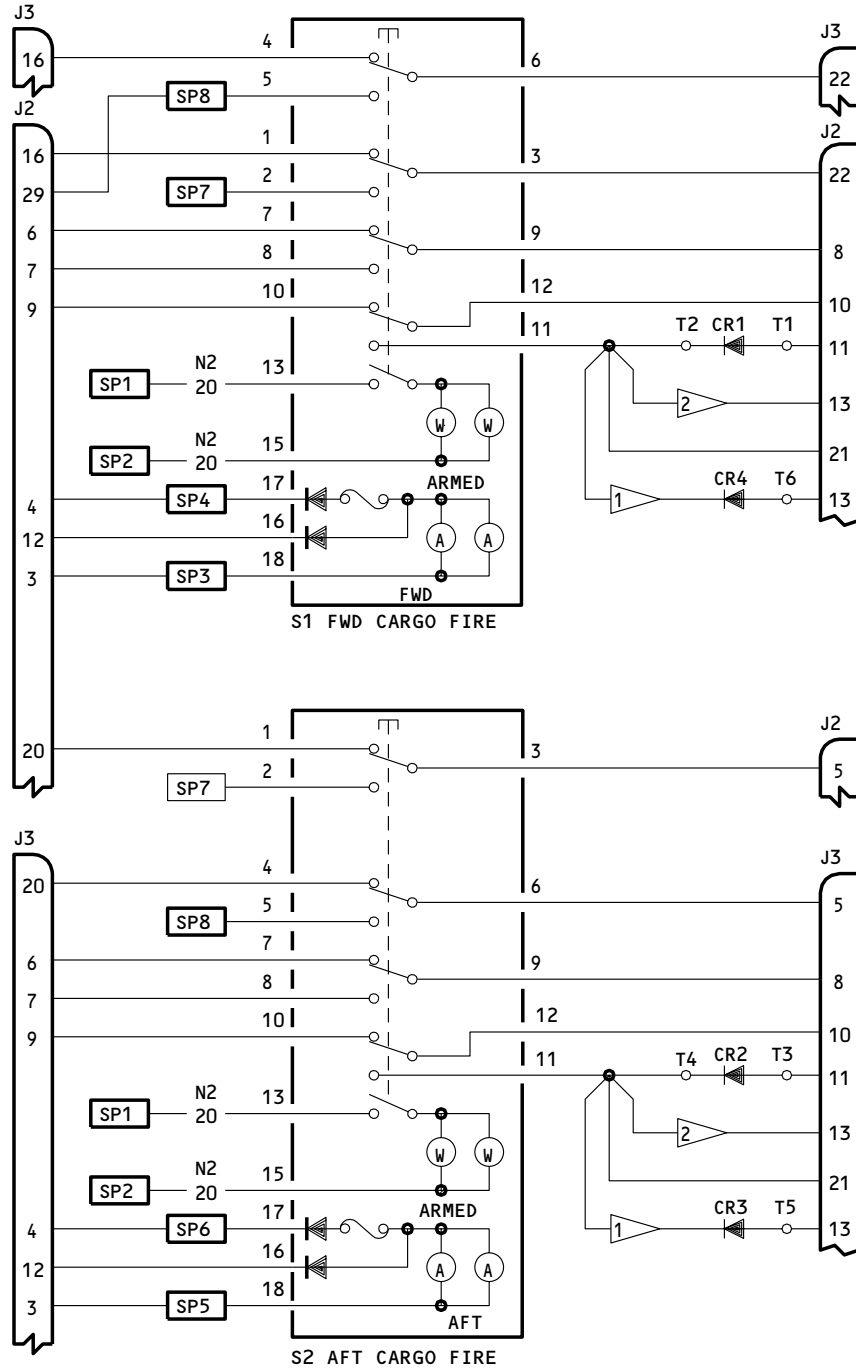


NOTE: ALL WIRE BMS 13-48, TY 1, CL 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.

SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

233N6203-35,-36,-47,-189,-206,-219,-1035,-1036,-1047,-1189,-1206,-1219
 233T6100-36

Schematic Diagram
 Figure 113 (Sheet 1)

26-15-51

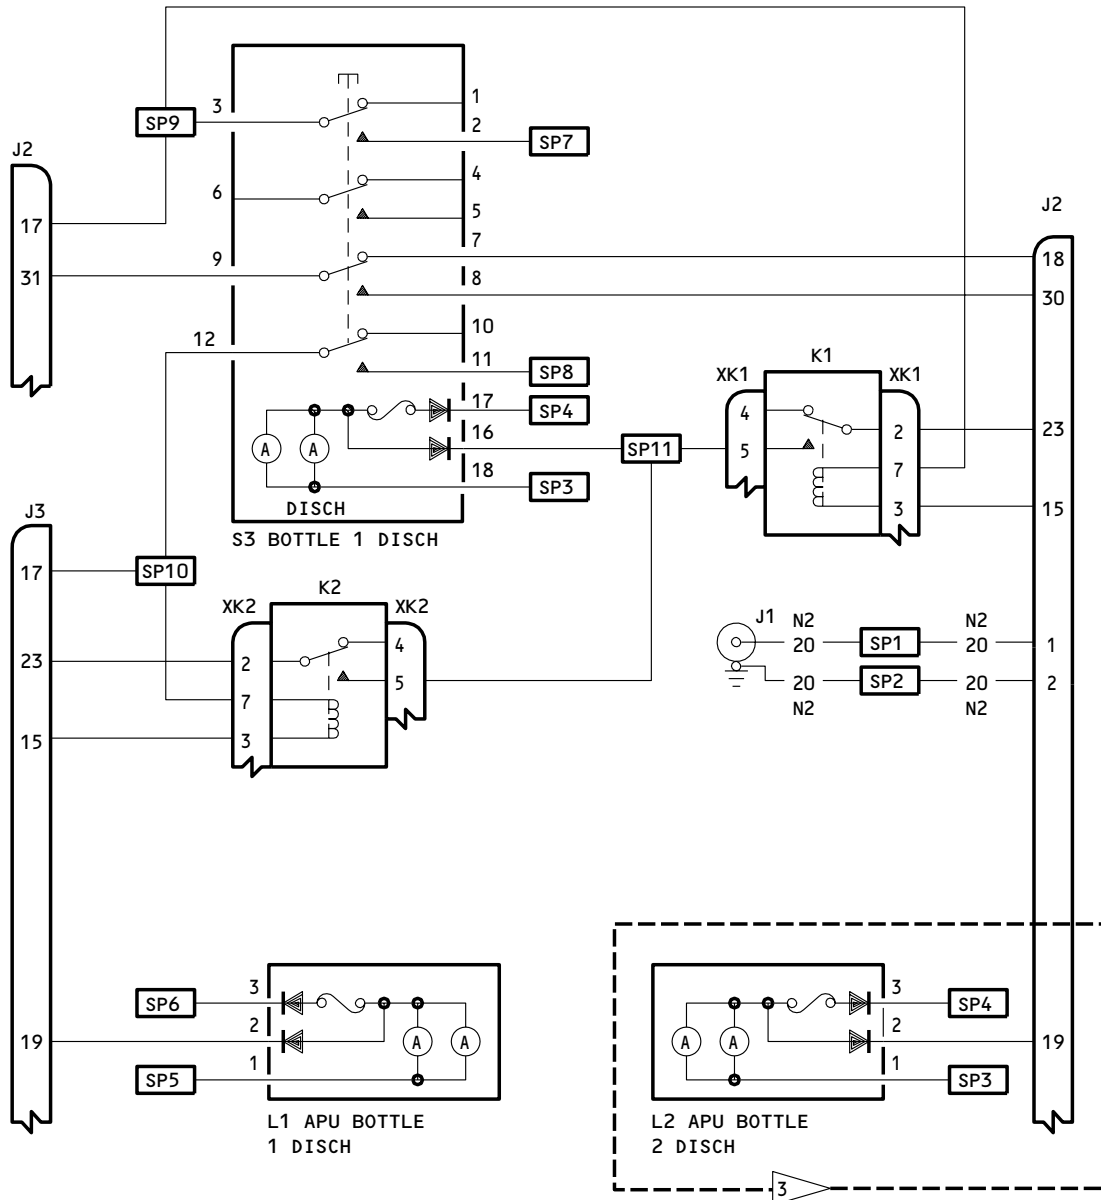


- 1 233N6203-35,-47,-206,-219,-1035,-1047,-1206,-1219
- 2 233N6203-36,-189,-1036,-1189
233T6100-36
- 3 233N6203-35,-206,-1035,-1206

233N6203-35,-36,-47,-189,-206,-219,-1035,-1036,-1047,-1189,-1206,-1219
 233T6100-36

Schematic Diagram
 Figure 113 (Sheet 2)



26-15-51

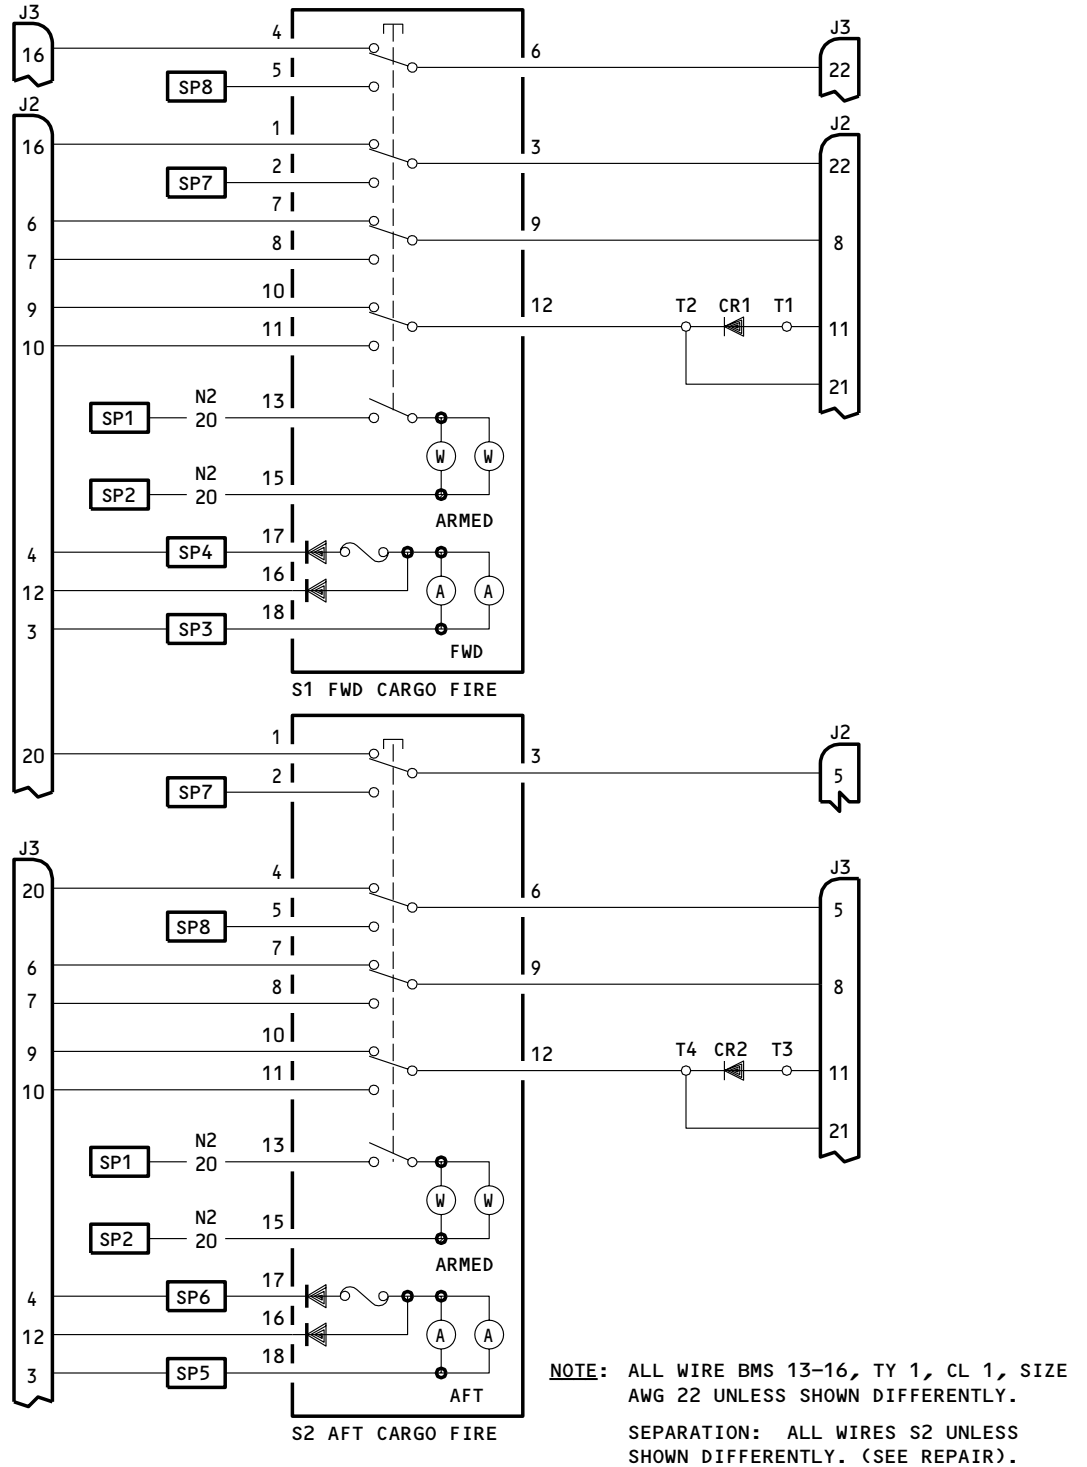

233N6203-79,-198,-1079,-1198,-1354,-1407
 233T6100-53

Schematic Diagram
 Figure 114 (Sheet 1)


26-15-51

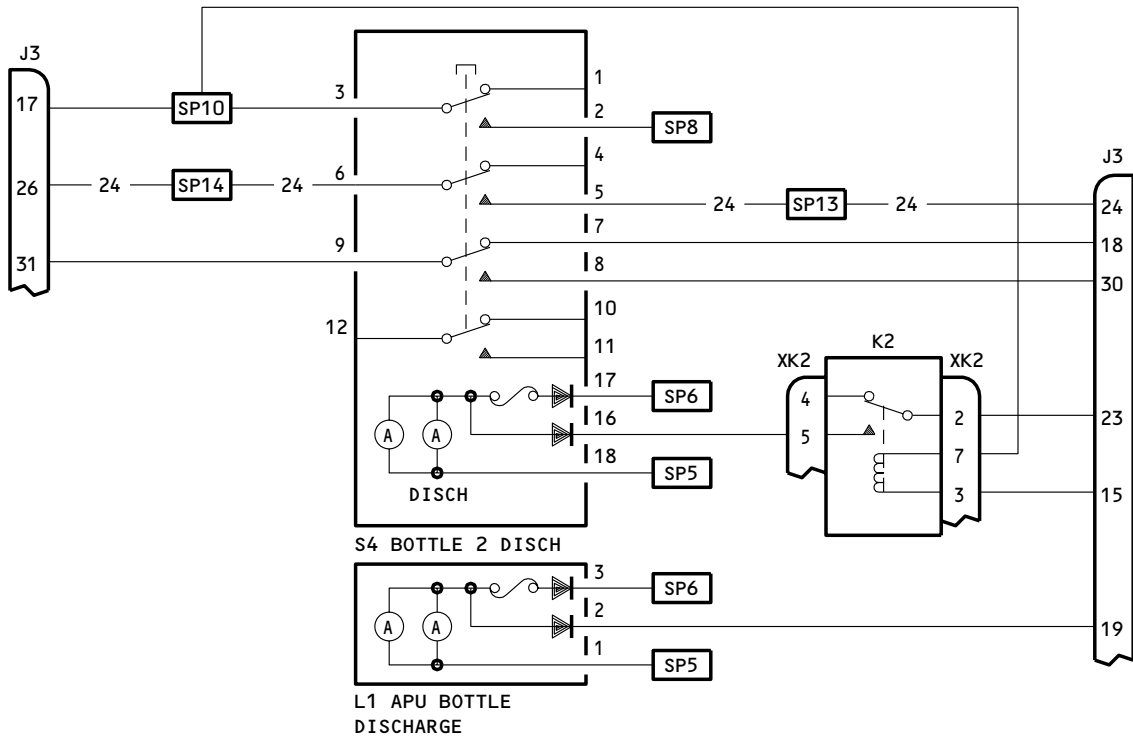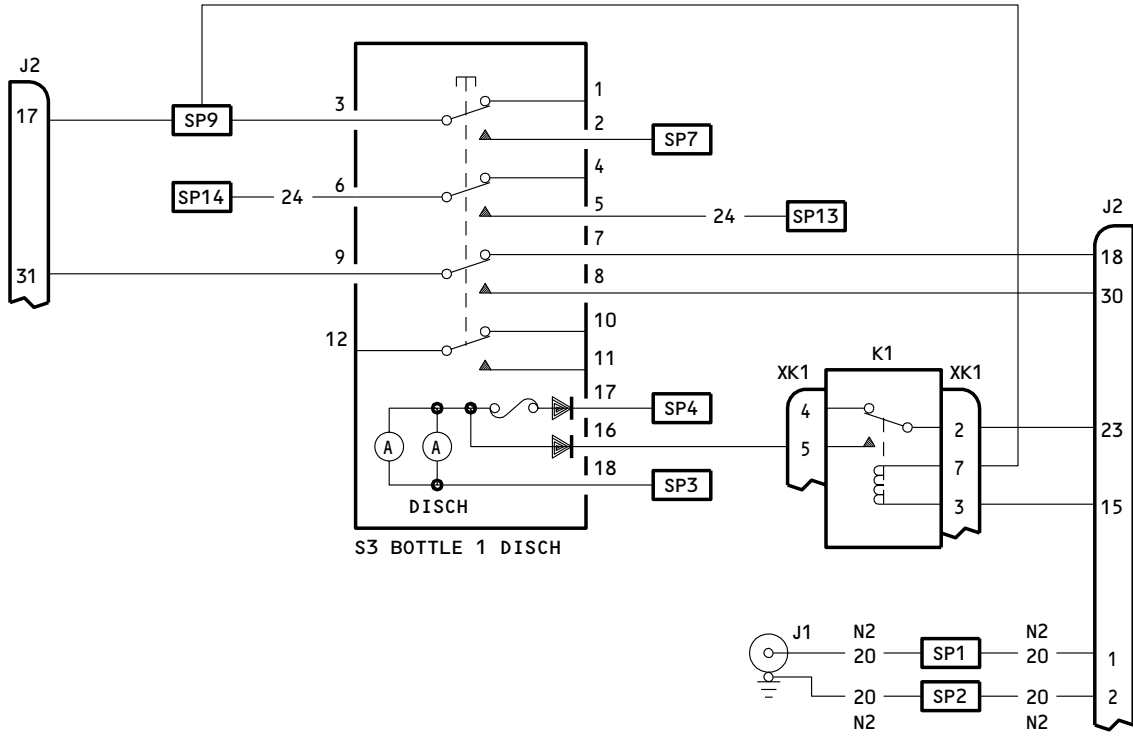

233N6203-79,-198,-1079,-1198,-1354,-1407
 233T6100-53

Schematic Diagram
 Figure 114 (Sheet 2)

26-15-51

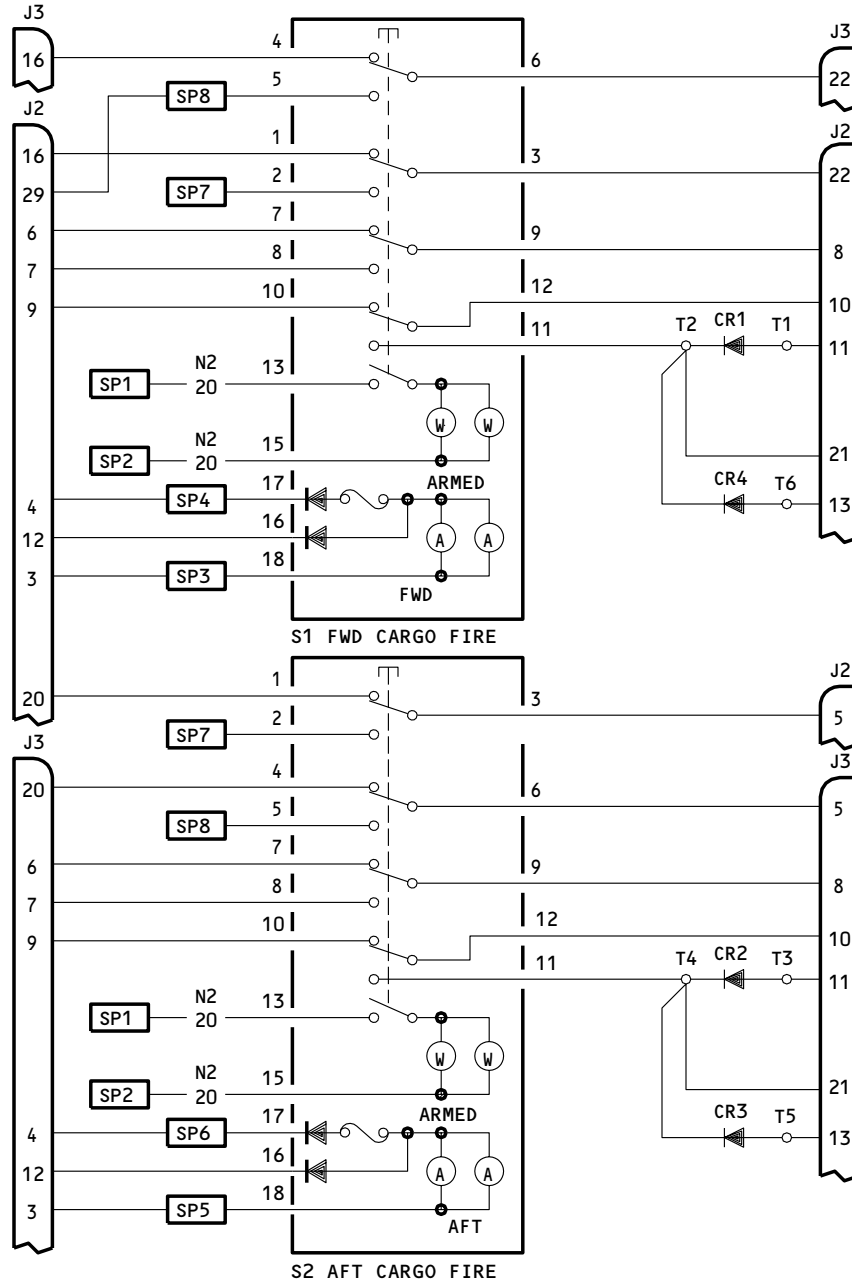


NOTE: ALL WIRE BMS 13-48, TY 1, CL 1, SIZE
 AWG 22 UNLESS SHOWN DIFFERENTLY.
 SEPARATION: ALL WIRES S2 UNLESS
 SHOWN DIFFERENTLY (SEE REPAIR).

- 1 233N6203-75,-197,-1075,-1197,-1353,-1406
- 2 233T6100-47 WITH 233N6203-67 OR -193 INSTALLED
- 3 233T6100-51 WITH 233N6203-75 OR -197 INSTALLED

233N6203-67,-75,-193,-197,-1067,-1075,-1193,-1197,-1350,-1353,-1403,-1406
 233T6100-47 2,-51 3

Schematic Diagram
 Figure 115 (Sheet 1)

26-15-51

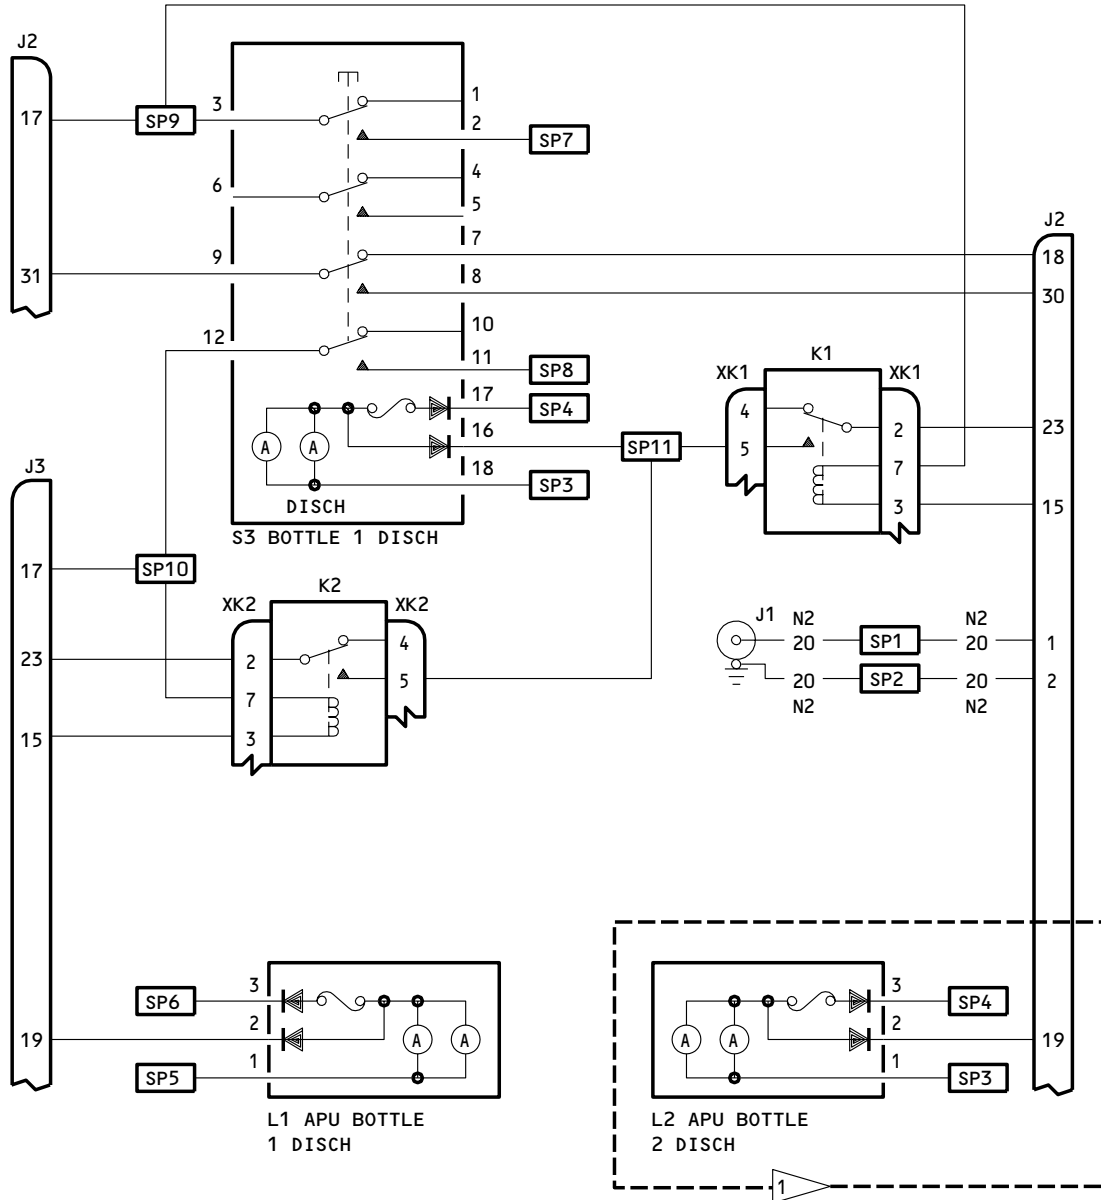


NOTE: ALL WIRE BMS 13-48, TY 1, CL 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.
 SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

- 1 233N6203-75,-197,-1075,-1197,-1353,-1406
- 2 233T6100-47 WITH 233N6203-67 OR -193 INSTALLED
- 3 233T6100-51 WITH 233N6203-75 OR -197 INSTALLED

233N6203-67,-75,-193,-197,-1067,-1075,-1193,-1197,-1350,-1353,-1403,-1406
 233T6100-47 2 -51 3

Schematic Diagram
 Figure 115 (Sheet 2)

26-15-51

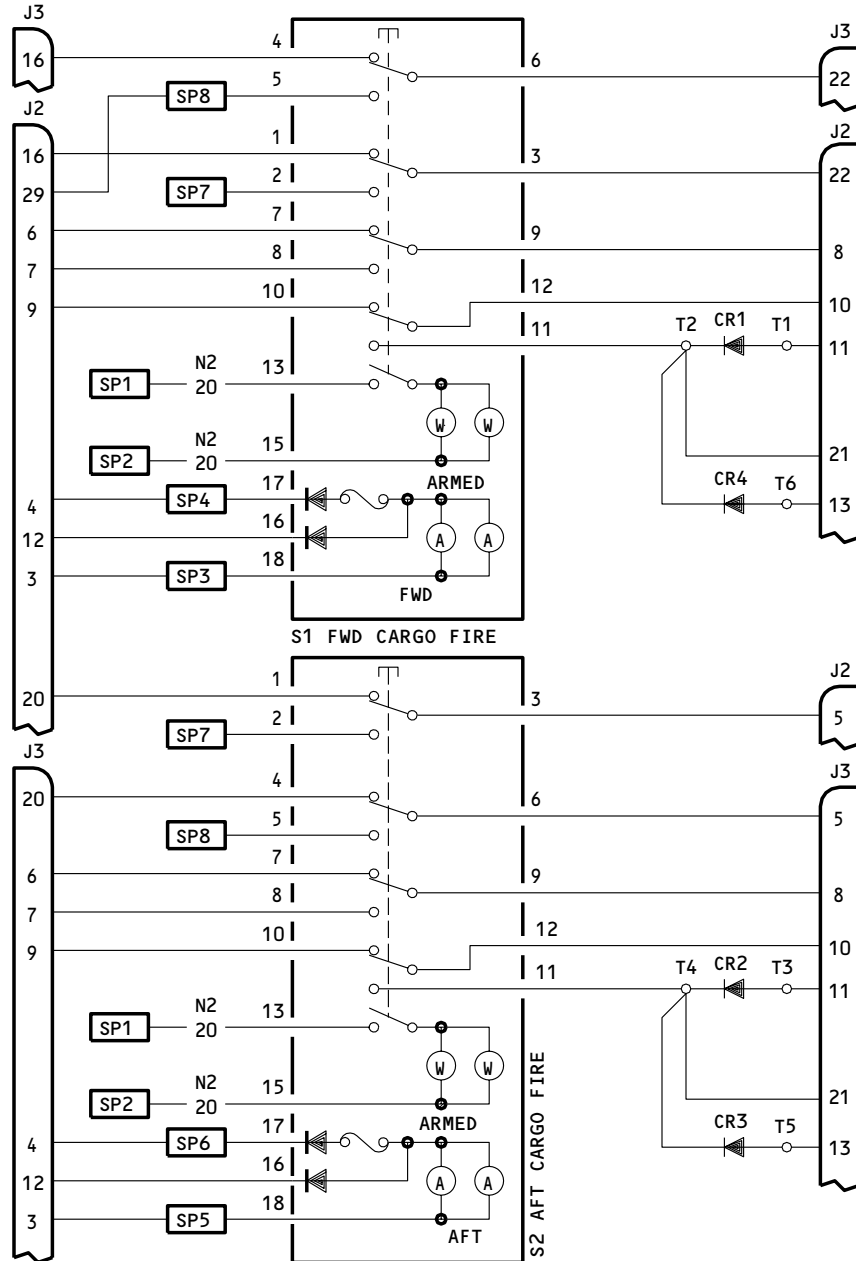


NOTE: ALL WIRE BMS 13-48, TY 1, CL 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY. SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

- 1 233N6203-73,-86,-196,-203,-1073,-1086,-1196
-1203,-1352,-1359,-1405,-1412
233T6100-50,-60 W/ 233N6203-86 OR -203
- 2 233T6100-59 WITH 233N6203-85 OR -202 INSTALLED
- 3 233T6100-60 WITH 233N6203-86 OR -203 INSTALLED

233N6203-70,-73,-85,-86,-195,-196,-202,-203,-1070,-1073,-1085,-1086,-1195,
 -1196,-1202,-1203,-1351,-1352,-1358,-1359,-1404,-1405,-1411,-1442
 233T6100-47,-50,-59 2 -60 3

Schematic Diagram
 Figure 116 (Sheet 1)

26-15-51

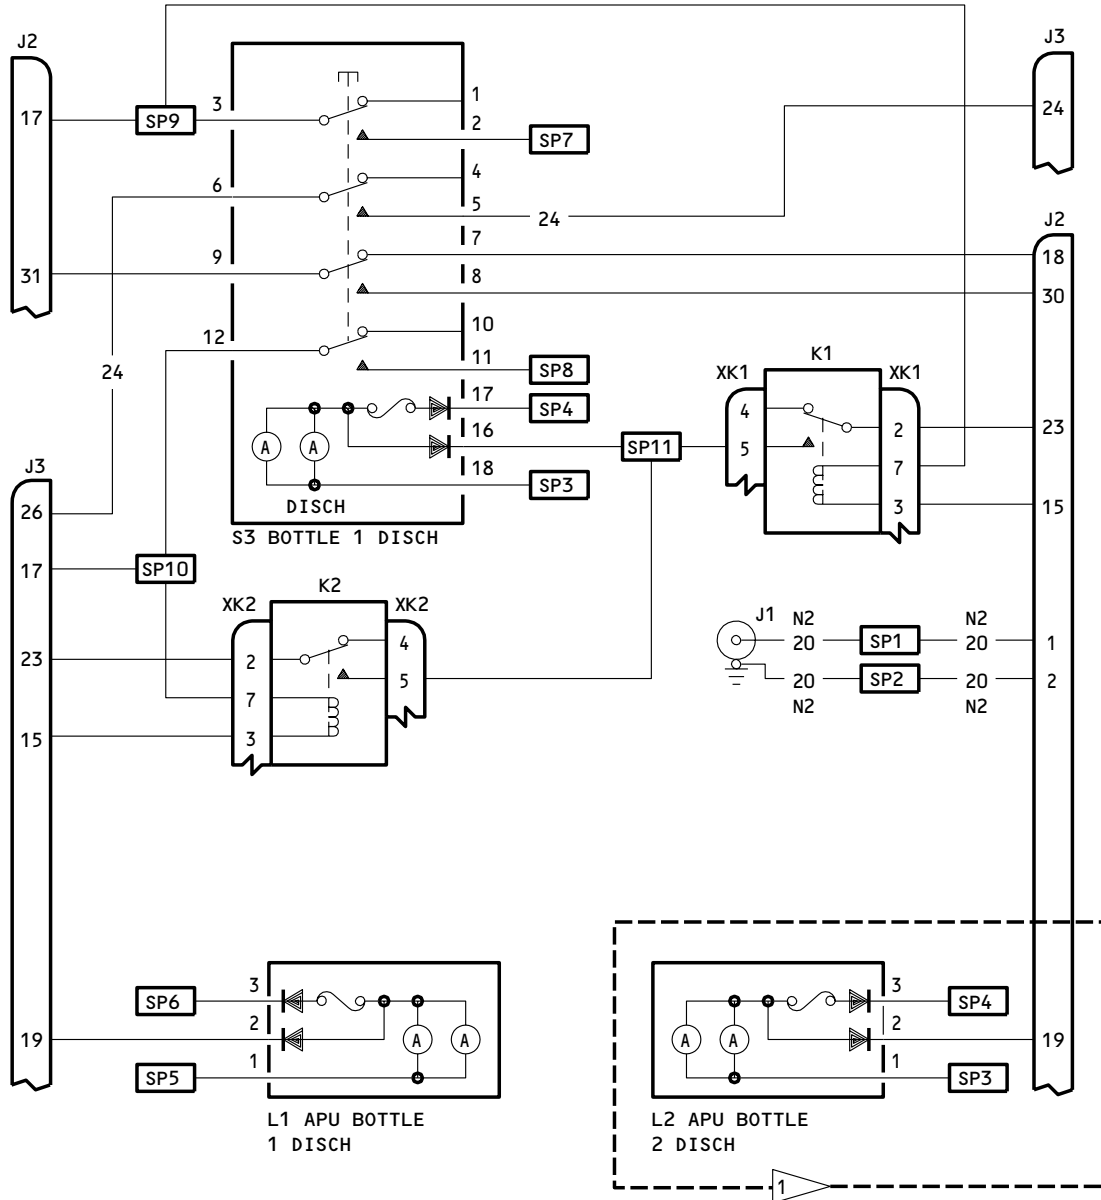

NOTE: ALL WIRE BMS 13-48, TY 1, CL 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY. SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).


- 1 233N6203-73,-86,-196,-203,-1073,-1086,-1196
 -1203,-1352,-1359,-1405,-1412
 233T6100-50,-60 W/ 233N6203-86 OR -203
- 2 233T6100-59 WITH 233N6203-85 OR -202 INSTALLED
- 3 233T6100-60 WITH 233N6203-86 OR -203 INSTALLED

233N6203-70,-73,-85,-86,-195,-196,-202,-203,-1070,-1073,-1085,-1086,-1195,
 -1196,-1202,-1203,-1351,-1352,-1358,-1359,-1404,-1405,-1411,-1442
 233T6100-47,-50,-59 2 , -60 3

Schematic Diagram
 Figure 116 (Sheet 2)

26-15-51

TESTING & TROUBLE SHOOTING
 01.1 Page 173
 Jul 01/03

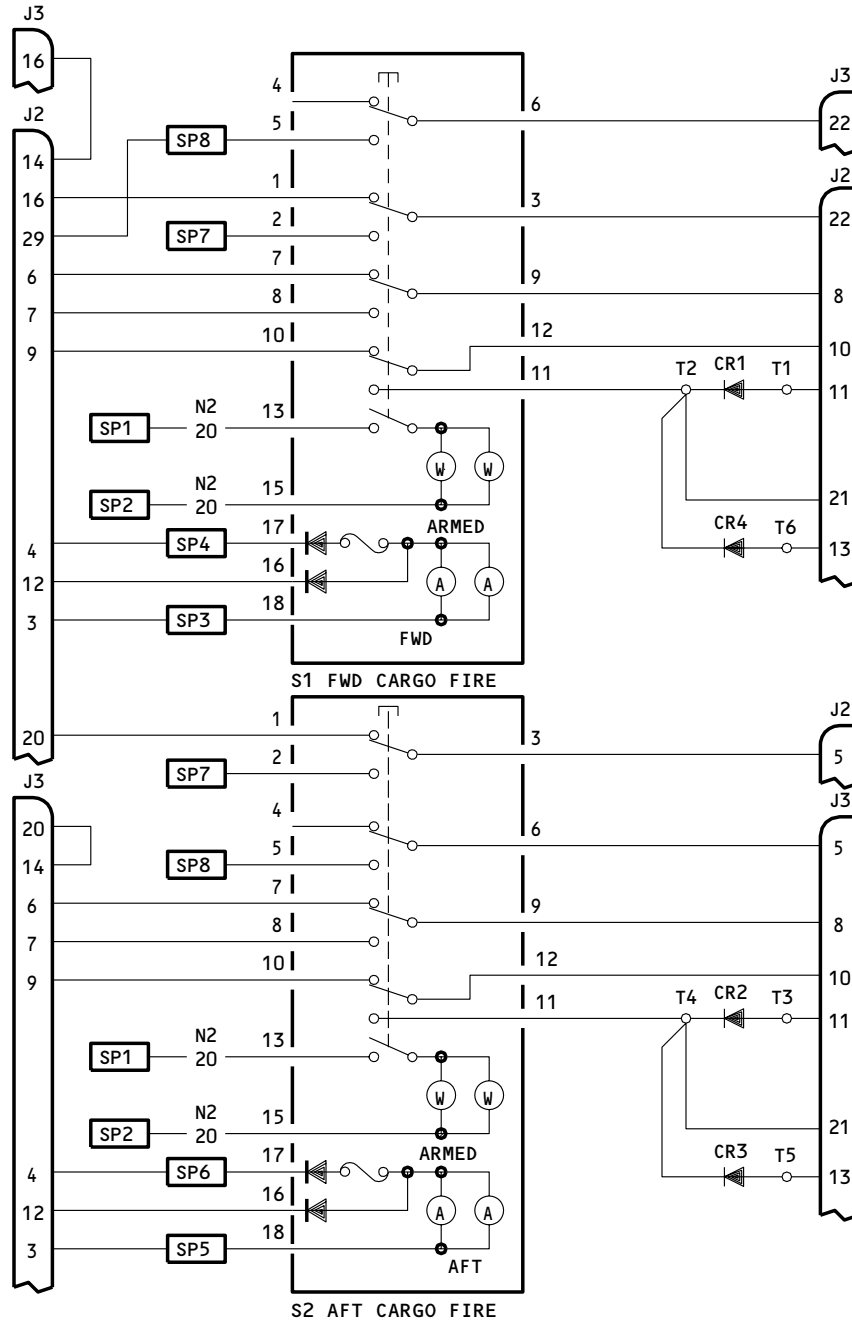


NOTE: ALL WIRE BMS 13-48, TYPE 1, CLASS 1,
 SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.
 SEPARATION: ALL WIRES S2 UNLESS
 SHOWN DIFFERENTLY (SEE REPAIR).

1 233T6100-60 WITH 233N6203-226 INSTALLED

233N6203-226,-1226,-1419
 233T6100-60 1

Schematic Diagram
 Figure 117 (Sheet 1)

26-15-51

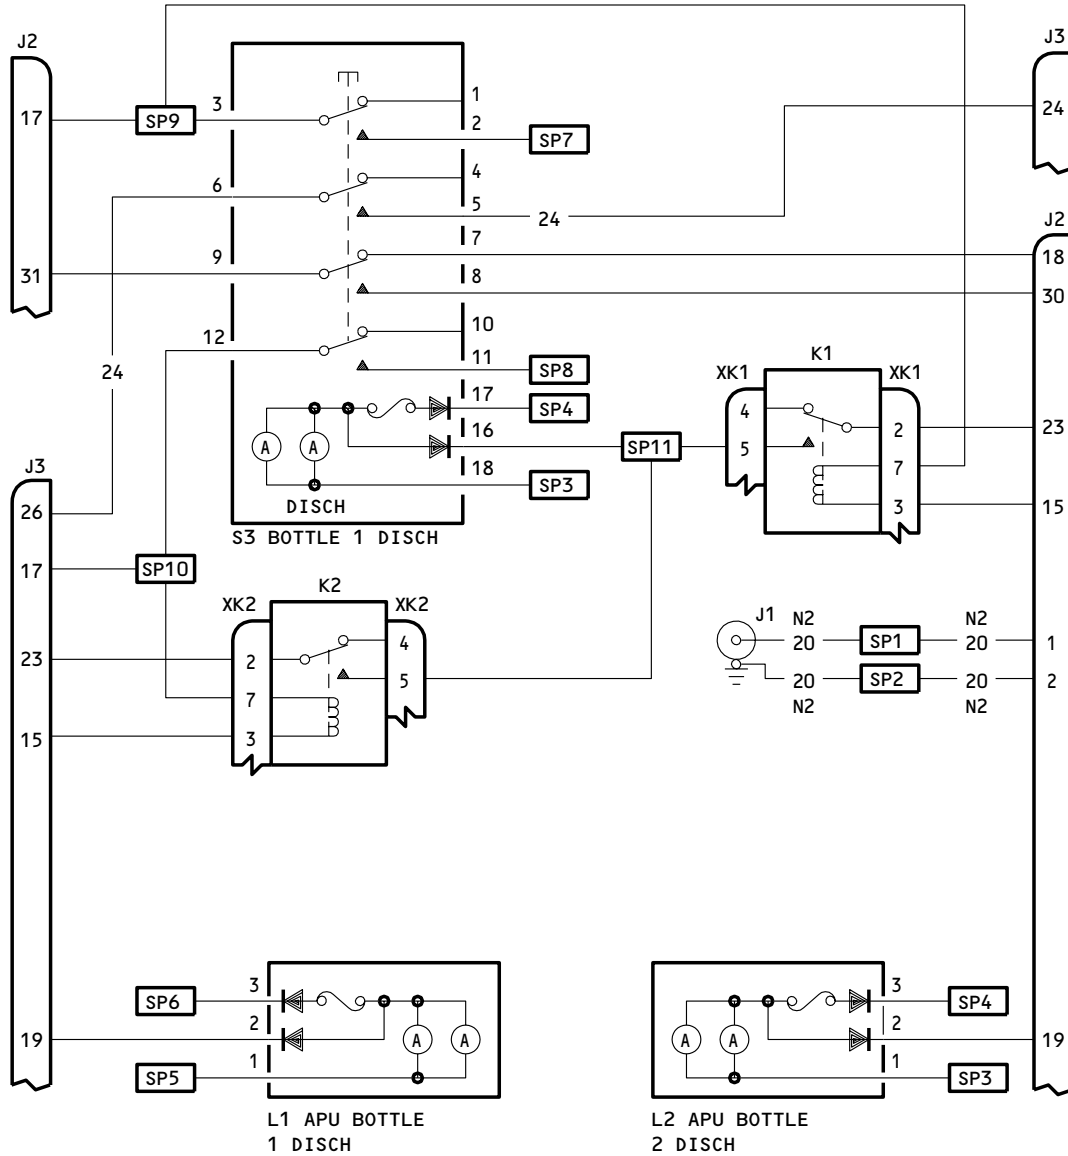


NOTE: ALL WIRE BMS 13-48, TYPE 1, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY. SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

1 ▸ 233T6100-60 WITH 233N6203-226 INSTALLED

233N6203-226, -1226, -1419
 233T6100-60 1 ▸

Schematic Diagram
 Figure 117 (Sheet 2)

26-15-51

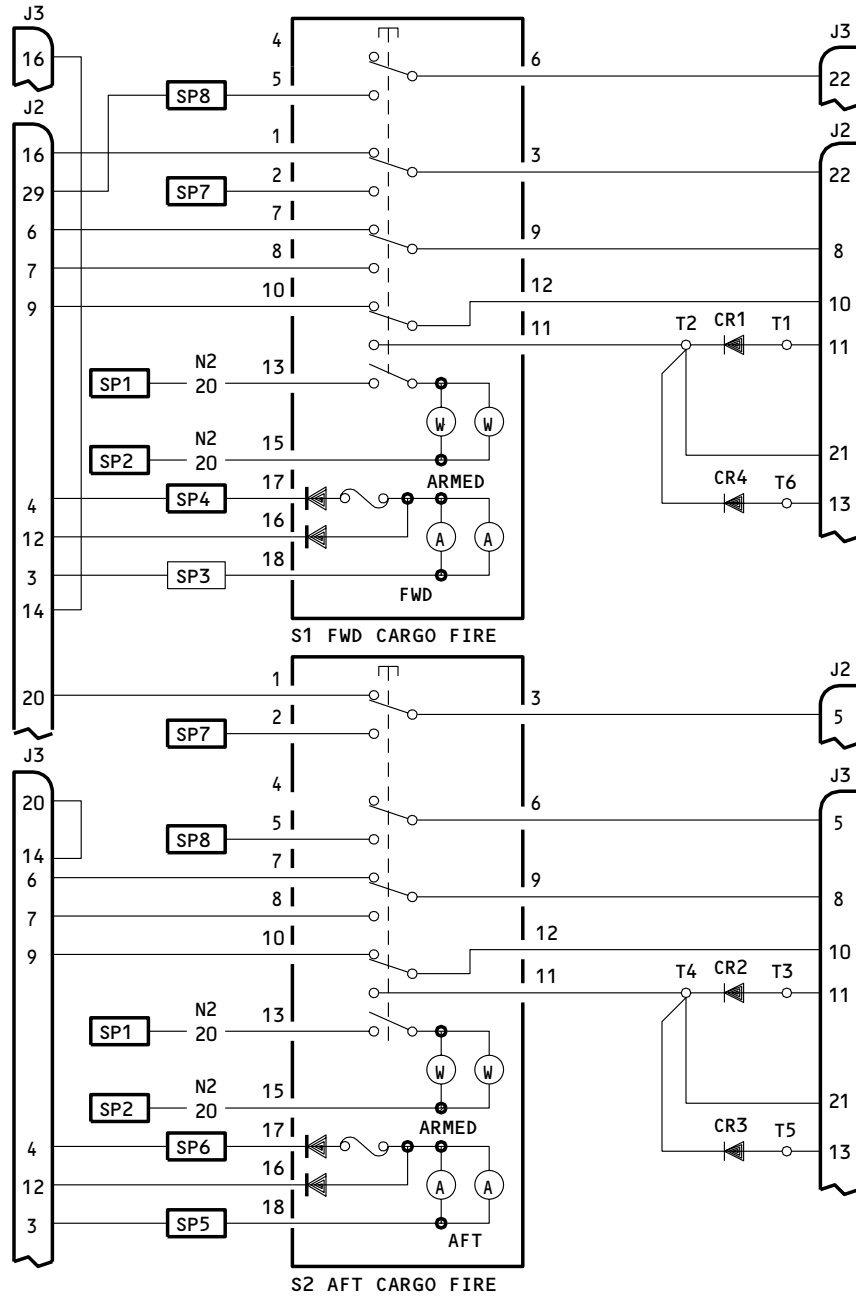


1 233T6100-59 WITH 233N6203-143 OR -186
 INSTALLED

233N6203-1386,-1398
 233T6100-59 1

Schematic Diagram
 Figure 118 (Sheet 1)

26-15-51

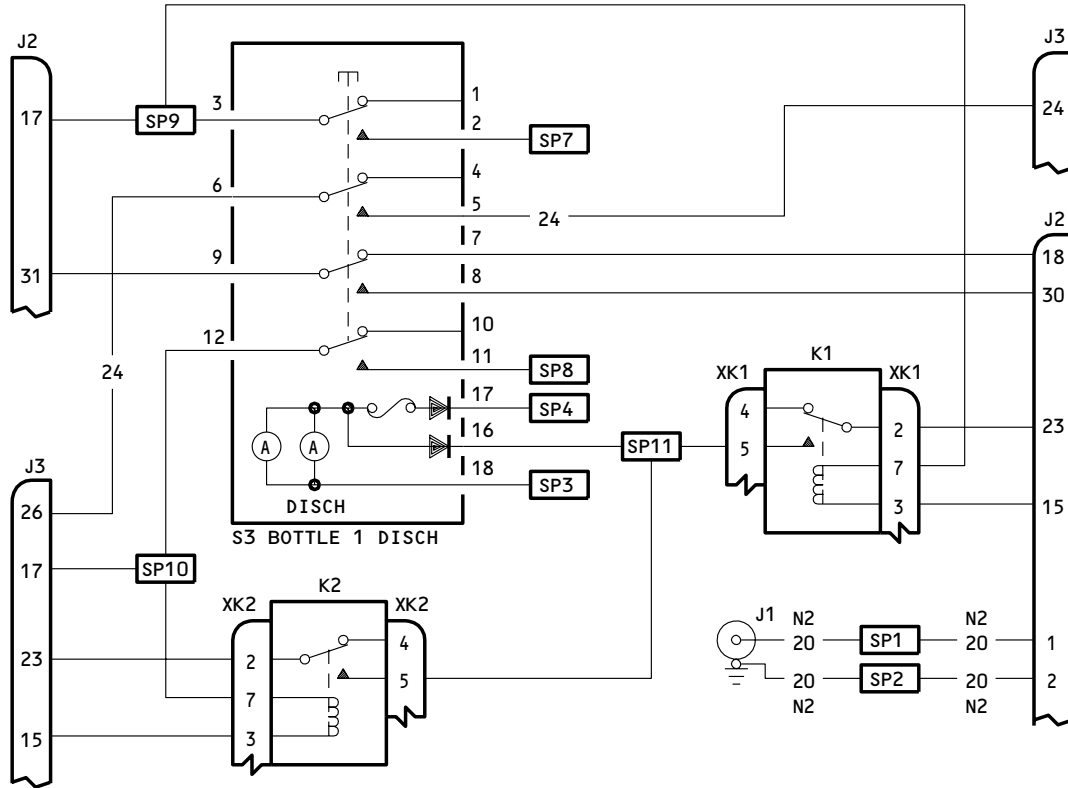

NOTES: ALL WIRES ARE BMS 13-16, TYPE 1, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.


SEPARATION: ALL WIRES ARE S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

1 233T6100-59 WITH 233N6203-143 OR -186 INSTALLED

233N6203-1386,-1398
 233T6100-59 1

Schematic Diagram
 Figure 118 (Sheet 2)

26-15-51

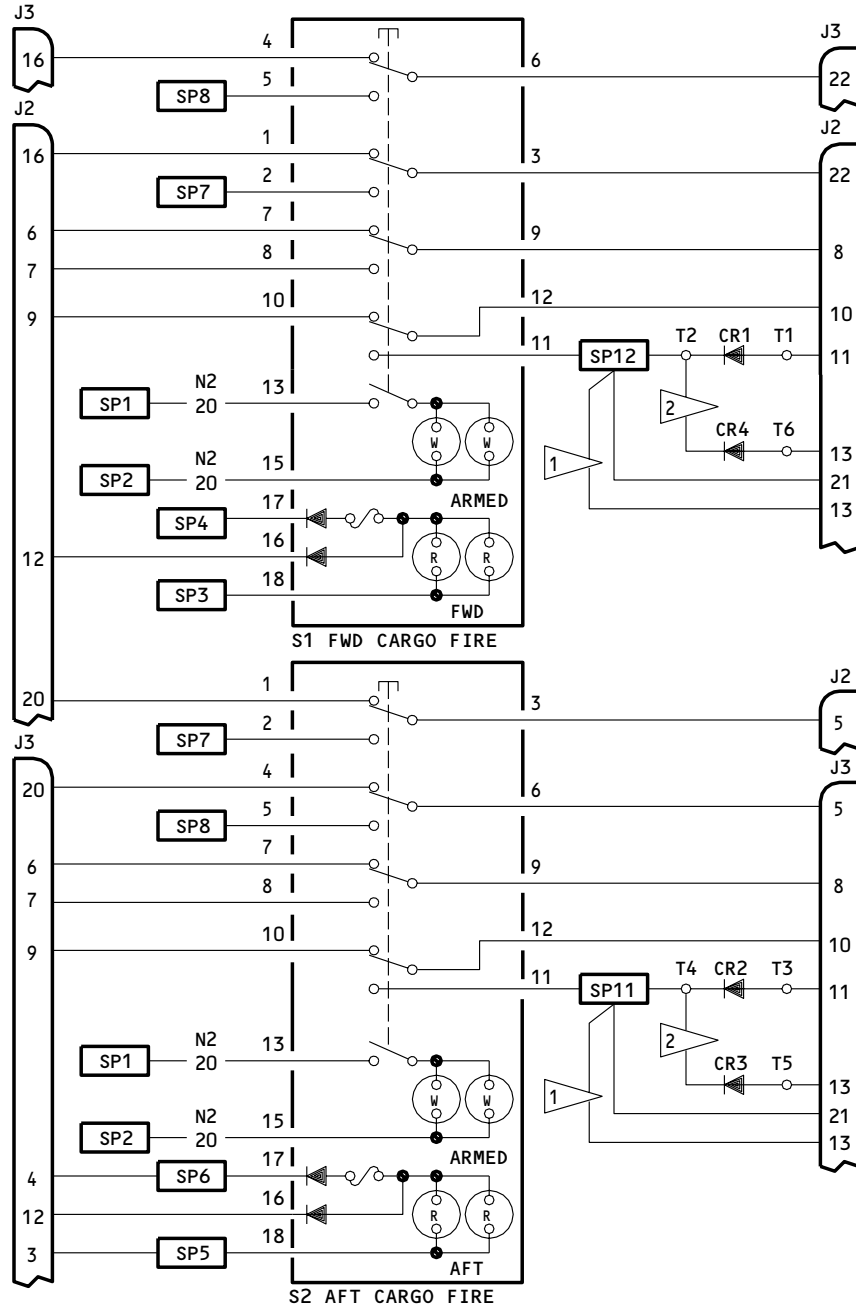

NOTE: ALL WIRE BMS 13-48, TYPE I, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY. SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

1 233N6203-1382,-1415
 233T6100-42 W/ 233N6203-94 OR -213

2 233N6203-1383,-1416
 233T6100-43 W/ 233N6203-95 OR -214


3 233T6100-42 W/ 233N6203-94 OR -213 INSTALLED

4 233T6100-43 W/ 233N6203-95 OR -214 INSTALLED

233N6203-1382,-1383,-1415,-1416
 233T6100-42 3,-43 4

Schematic Diagram
 Figure 119 (Sheet 1)

26-15-51

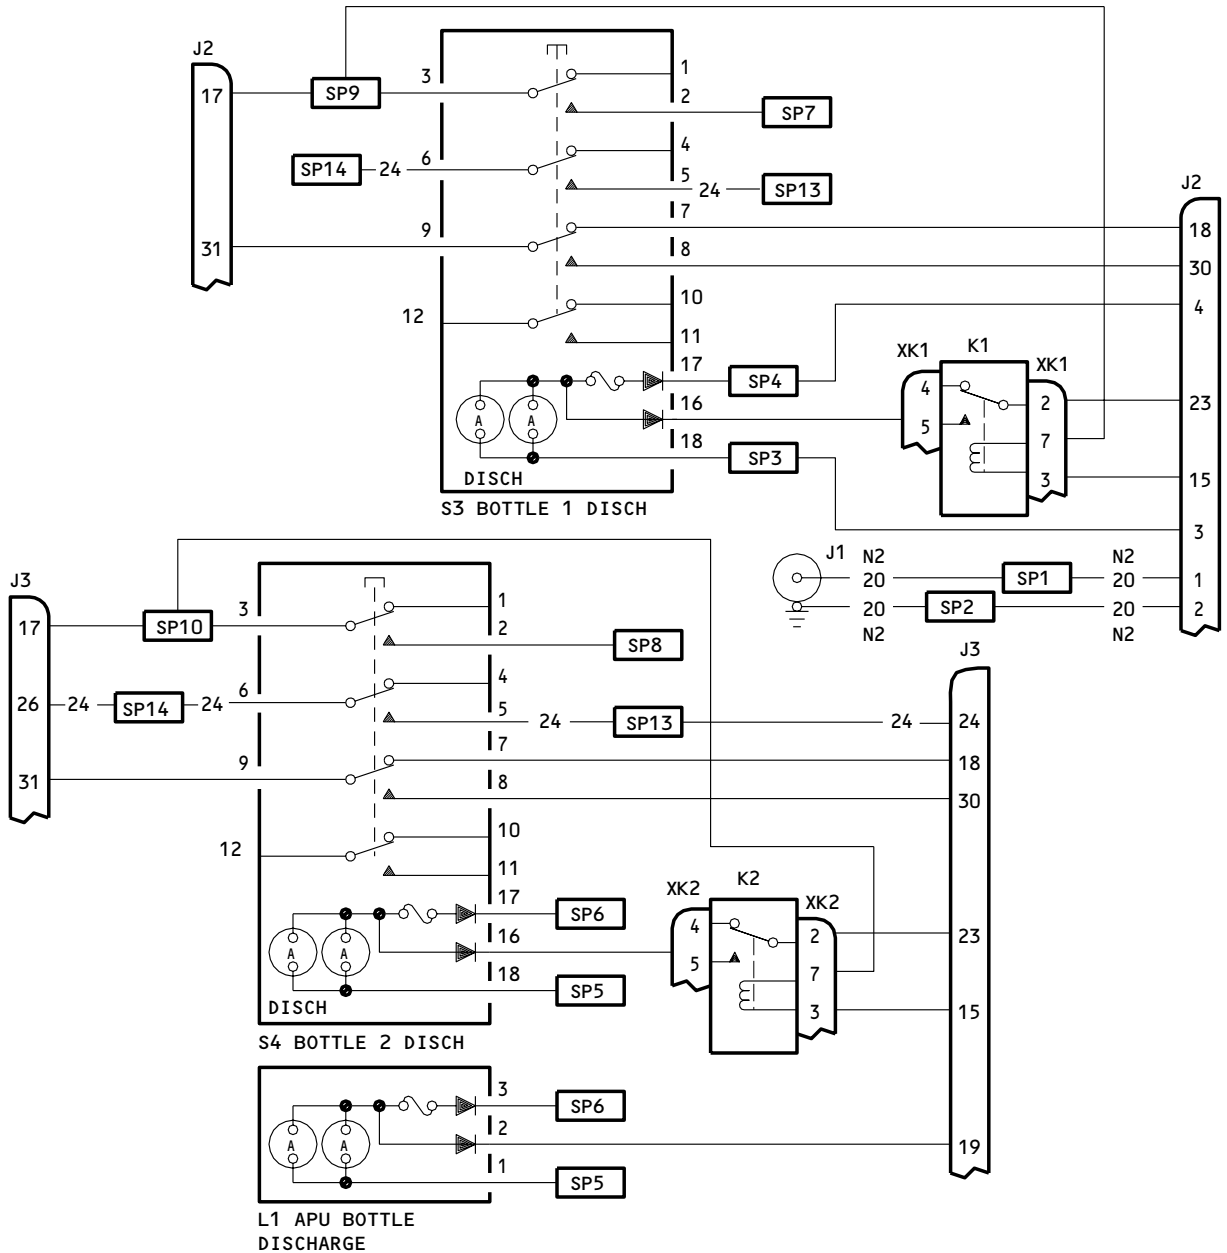

NOTE: ALL WIRE BMS 13-48, TYPE I, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY. SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

1 233N6203-1382,-1415
 233T6100-42 W/ 233N6203-94 OR -213

2 233N6203-1383,-1416
 233T6100-43 W/ 233N6203-95 OR -214

3 233T6100-42 W/ 233N6203-94 OR -213 INSTALLED


4 233T6100-43 W/ 233N6203-95 OR -214 INSTALLED

233N6203-1382,-1383,-1415,-1416

233T6100-42 3,-43 4

Schematic Diagram
 Figure 119 (Sheet 2)

26-15-51

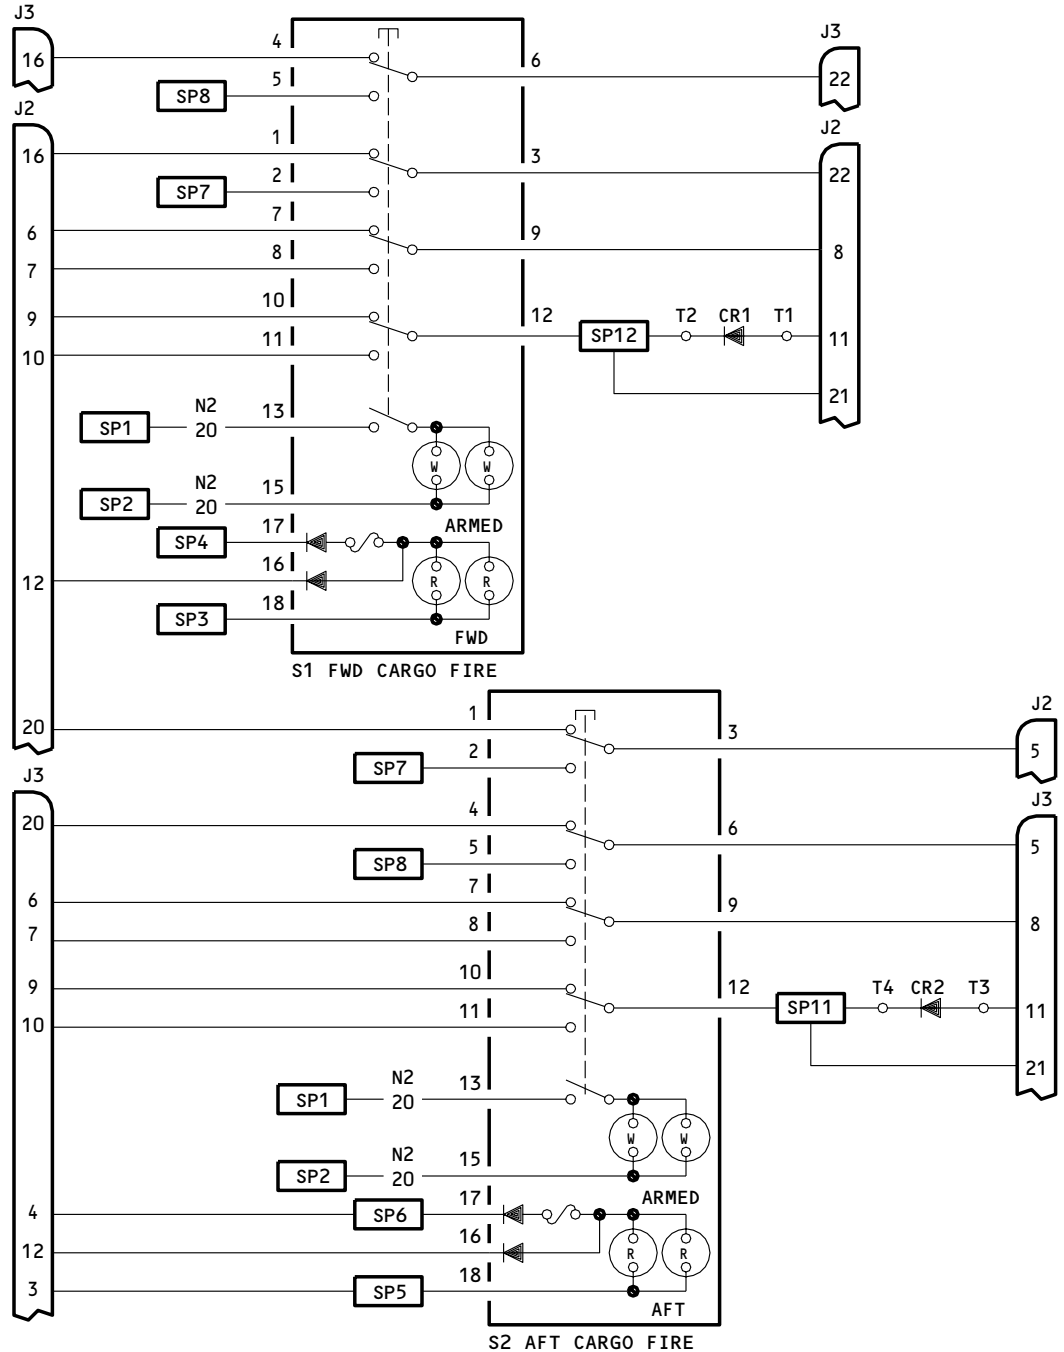

NOTE: ALL WIRE BMS 13-16, TYPE I, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.


SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

1 233T6100-39 WITH 233N6203-93 OR -212 INSTALLED

233N6203-1381,-1414
 233T6100-39 1

Schematic Diagram
 Figure 120 (Sheet 1)

26-15-51

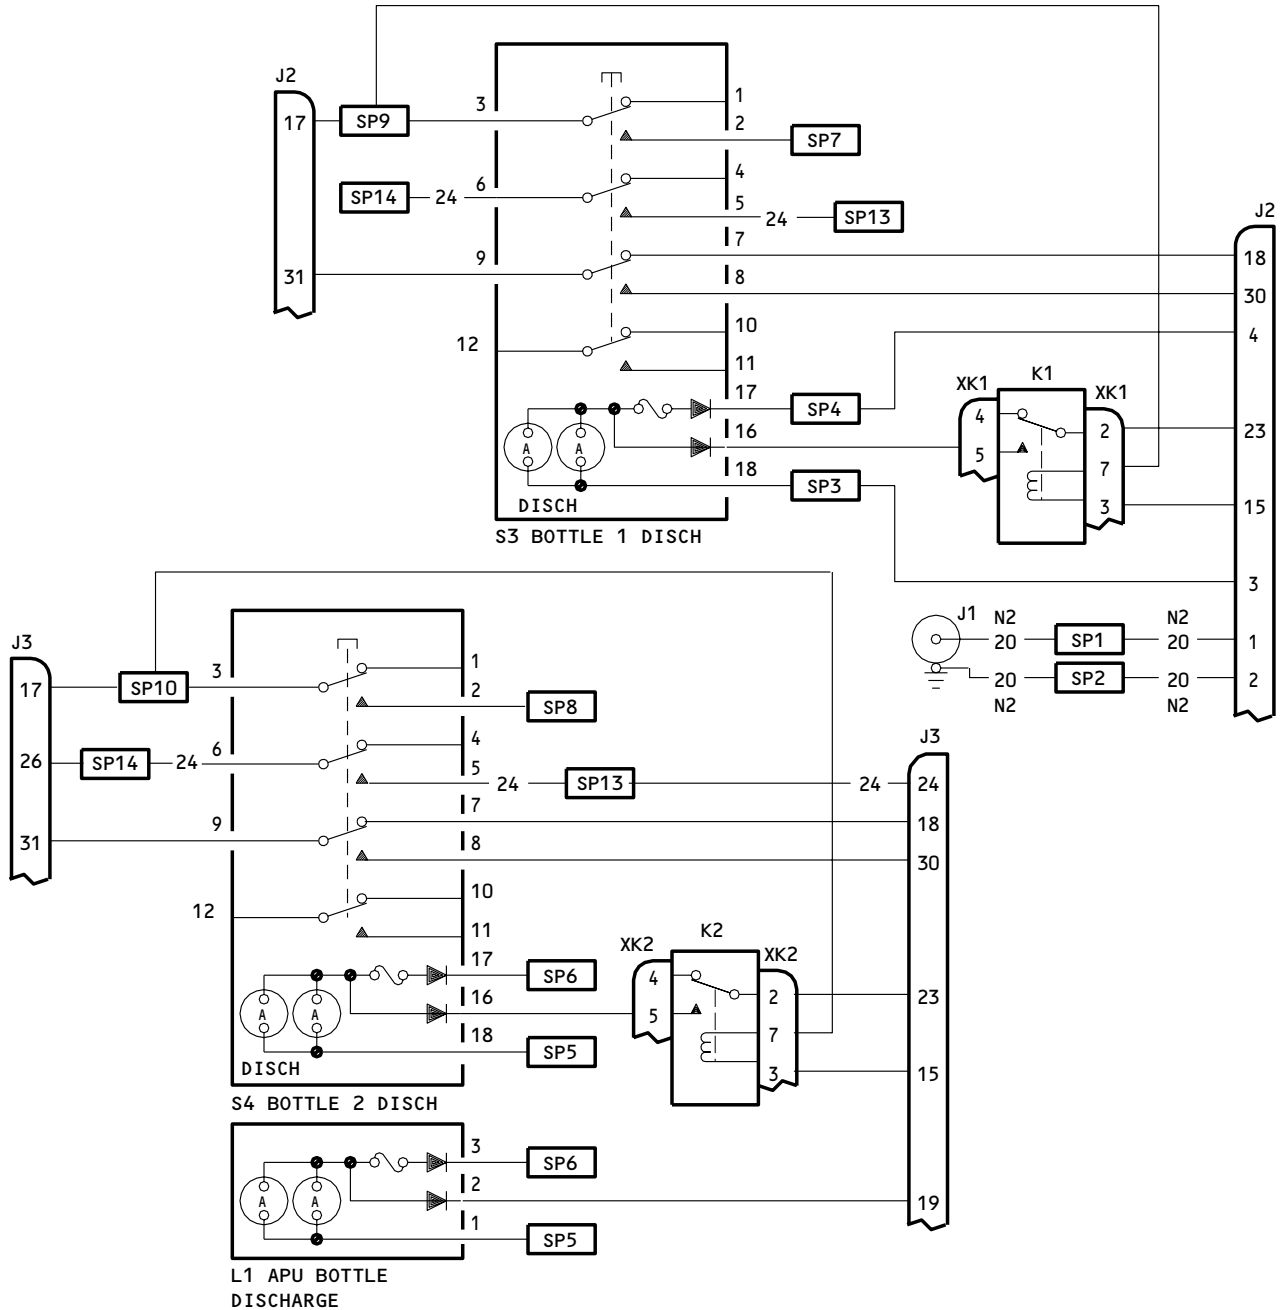

NOTE: ALL WIRE BMS 13-16, TYPE I, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.


SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

1 233T6100-39 WITH 233N6203-93 OR -212 INSTALLED

233N6203-1381, -1414
 233T6100-39 1

Schematic Diagram
 Figure 120 (Sheet 2)

26-15-51

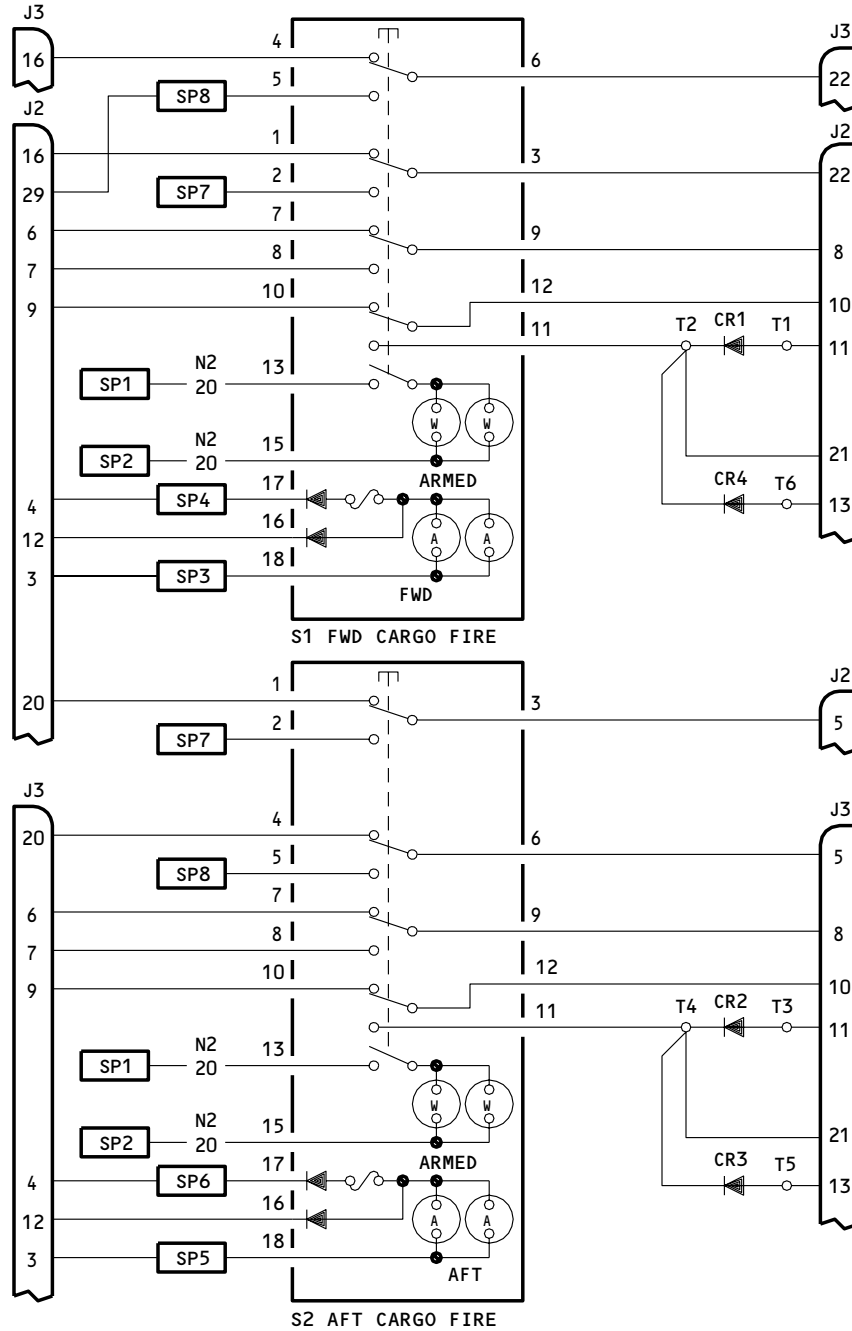

NOTE: ALL WIRE BMS 13-48, TYPE I, CLASS 1,
 SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.


SEPARATION: ALL WIRES S2 UNLESS
 SHOWN DIFFERENTLY (SEE REPAIR).

- 1 233N6203-1385,-1418
 233T6100-51 W/ 233N6203-98 OR -217
 - 2 233T6100-47 WITH 233N6203-96 OR -215 INSTALLED
 - 3 233T6100-51 WITH 233N6203-98 OR -217 INSTALLED
- 233N6203-1384,-1385,-1417,-1418
 233T6100-47 2, -51 3

Schematic Diagram
 Figure 121 (Sheet 1)

26-15-51

TESTING & TROUBLE SHOOTING
 01.1 Page 180K
 Jul 01/03

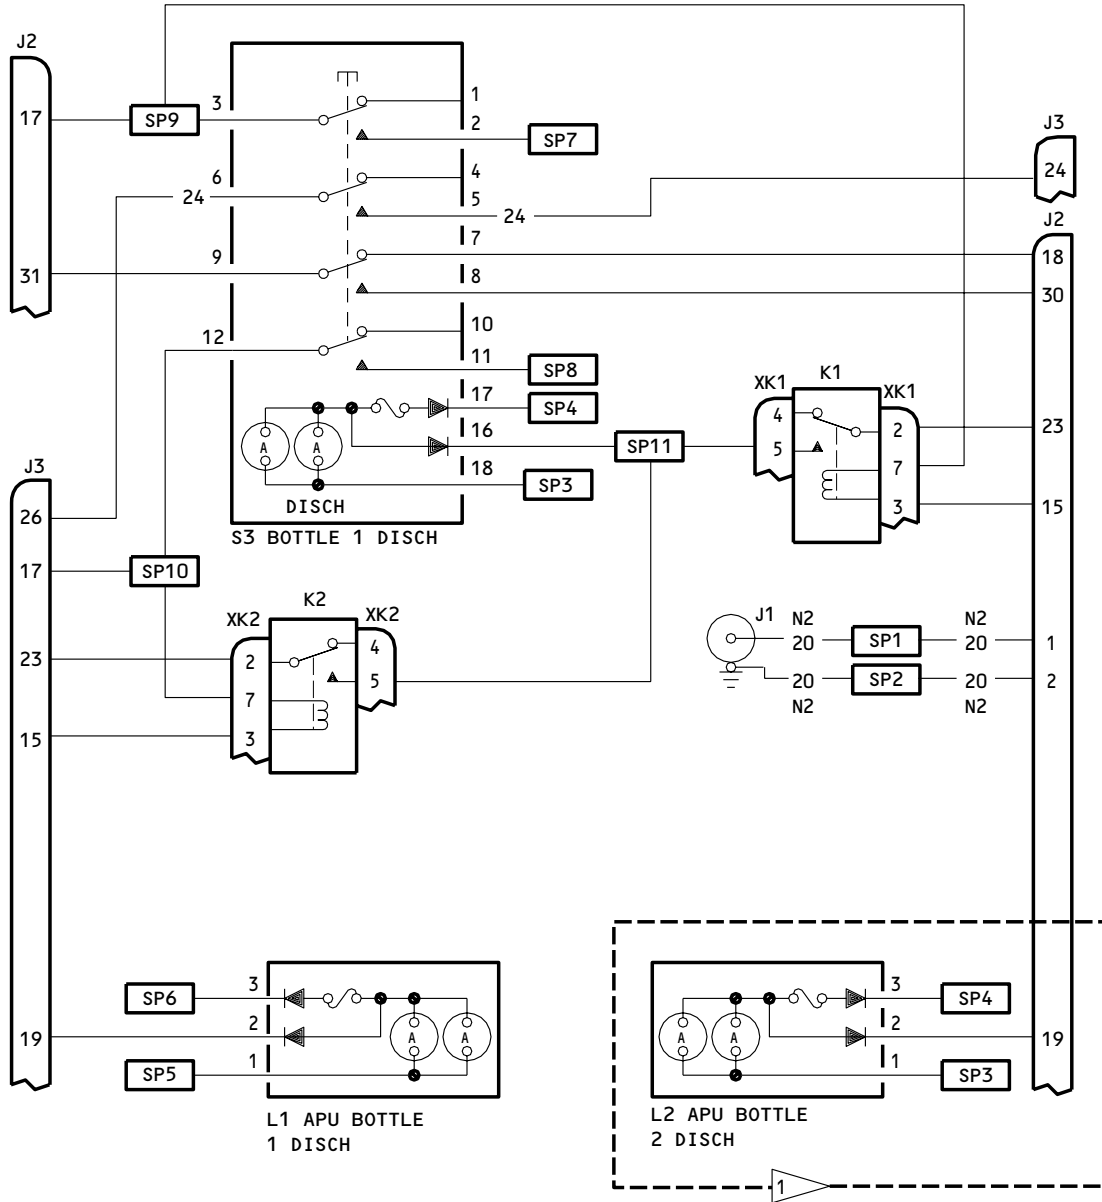

NOTE: ALL WIRE BMS 13-48, TYPE I, CLASS 1, SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.


SEPARATION: ALL WIRES S2 UNLESS SHOWN DIFFERENTLY (SEE REPAIR).

233N6203-1384, -1385, -1417, -1418
 233T6100-47 2, -51 3

- 1 233N6203-1385, -1418
 233T6100-51 W/ 233N6203-98 OR -217
- 2 233T6100-47 WITH 233N6203-96 OR -215 INSTALLED
- 3 233T6100-51 WITH 233N6203-98 OR -217 INSTALLED

Schematic Diagram
 Figure 121 (Sheet 2)

26-15-51

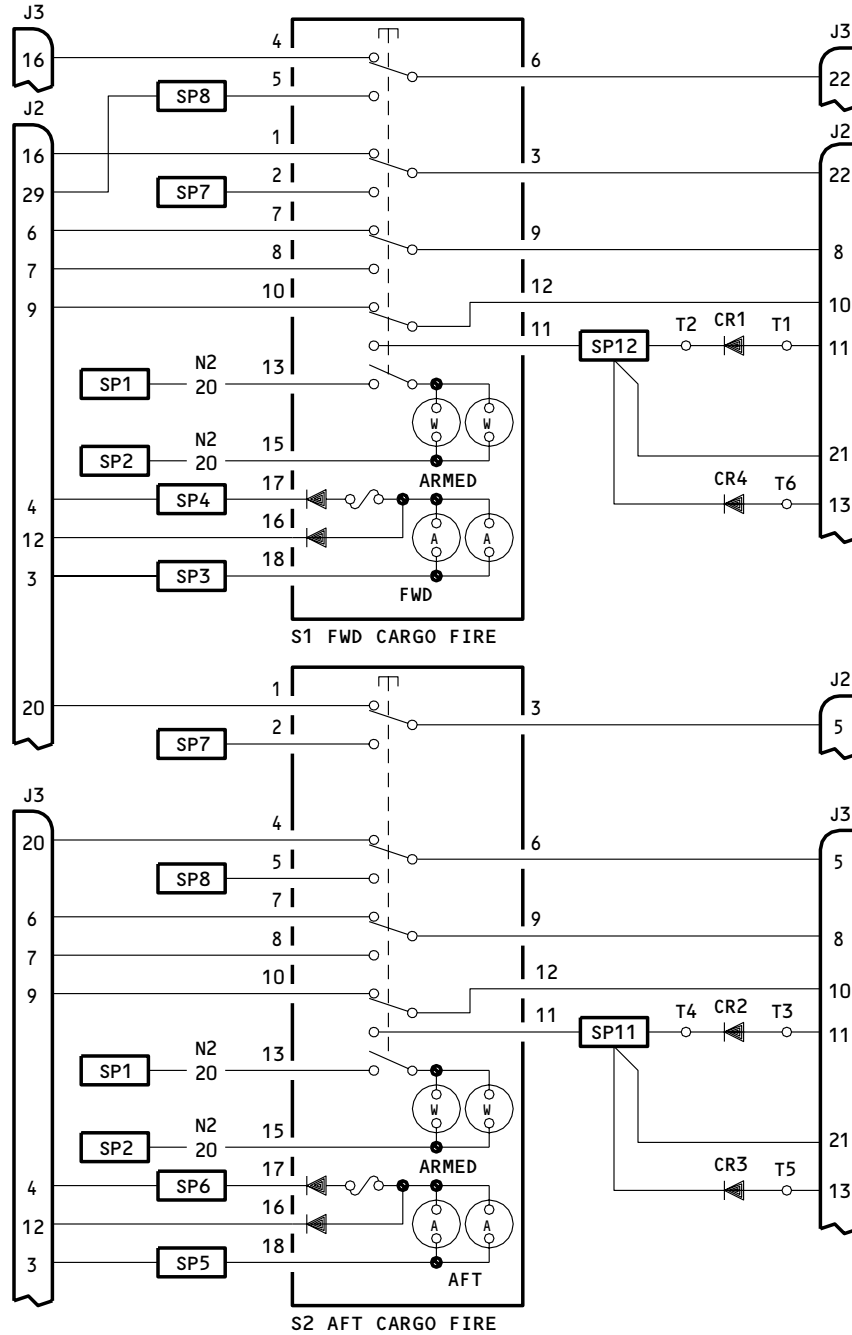

1 233T6100-43 WITH 233N6203-160 OR -205
 INSTALLED


NOTE: ALL WIRE BMS 13-48, TYPE I, CLASS 1,
 SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.

SEPARATION: ALL WIRES S2 UNLESS
 SHOWN DIFFERENTLY (SEE REPAIR).

233N6203-1389,-1413
 233T6100-43 1

Schematic Diagram
 Figure 122 (Sheet 1)

26-15-51

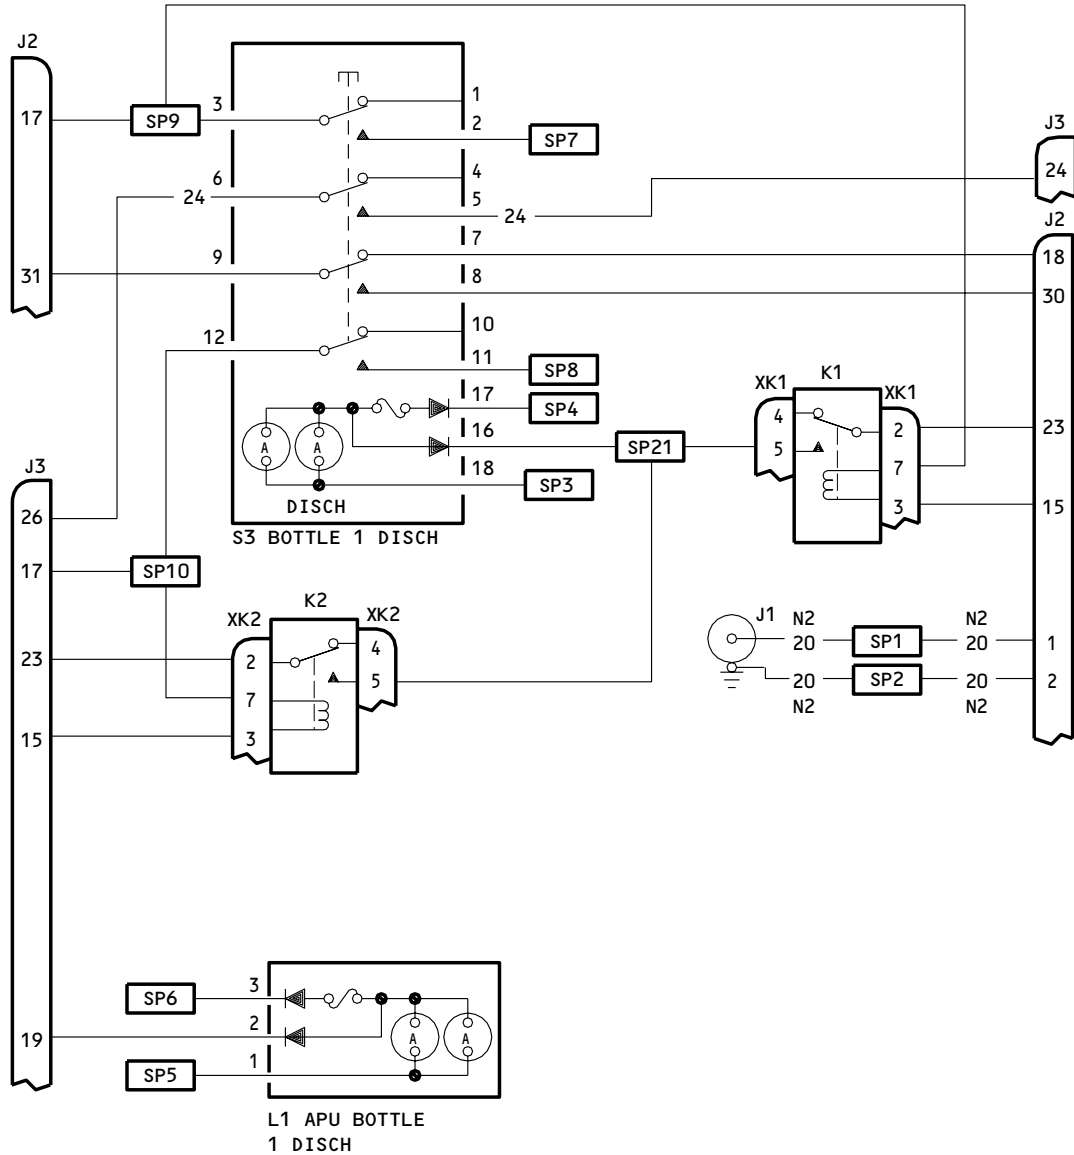

1 233T6100-43 WITH 233N6203-160 OR -205
 INSTALLED

NOTE: ALL WIRE BMS 13-48, TYPE I, CLASS 1,
 SIZE AWG 22 UNLESS SHOWN DIFFERENTLY.

SEPARATION: ALL WIRES S2 UNLESS
 SHOWN DIFFERENTLY (SEE REPAIR).

233N6203-1389,-1413
 233T6100-43 1

Schematic Diagram
 Figure 122 (Sheet 2)

26-15-51

REPAIR

1. Materials

- A. Varglas non-fray, type H0 or HP sleeving (Varflex Corp.) 512 W Court Street, Rome, New York, 13440
- B. Loctite sealant type 242 or 222 without primer (Loctite Corp., 705 North Mountain Road, Newington, Connecticut 06111-1411).
- C. Primer: BMS 10-11, Type 1 (SOPM 20-60-02)
- D. Enamel: Hi-Speed Lacquer Boeing Color 8328
- E. Enamel: Hi-Speed Dark Gray Flat Lacquer (1-1-1-703) (SOPM 20-41-01)

2. To repair, use standard shop procedures and the instructions in 20-11-05 except for the special instructions which follow:

- A. When you replace wires, isolate all wires by groups (N2, S2, ...). Keep at least 1/4-inch separation between wire bundles of different groups. Use separators (63-9273) or Varglas sleeving to keep the correct separation. If more than one group is attached to one component, put sleeve on one or more wires to have a correct separation. Wire bundles are color-coded as follows: R2 (green), S2 (blue), L2 (red), and N2 (white).
- B. When you replace relays K1 and K2, if necessary, discard vendor-supplied spacers and use washers P/N MS35338-40 (IPL item 123, Fig. 1) to prevent bending the tab too much.
- C. When you remove or replace the following screws: (NAS514P632-5), Fig. 1, Item 6, and (NAS514P832-7) Fig. 1, Item 45, apply loctite sealant type 222 or 242 to the threaded part before you tighten the screw.

NOTE: After you tighten the screws, touch up the screw heads as follows:

Prepare the surface and apply two coats of Sherwin Williams Hi-Speed Dark Gray Flat Lacquer per SOPM 20-41-04.

Apply one coat of BMS 10-11, type 1 primer (SOPM 20-41-02).

Prepare the surface and apply two coats of Hi-Speed Lacquer, Boeing Color 8328, Flat (SOPM 20-41-04).

26-15-51

REPAIR-GENERAL

01.1

Page 601

Nov 01/98

- D. When you replace the Korry lighted pushbutton switches installed on the module, P/N 233N6203-1XXX, make sure that you use the switch with the letter "D" imprinted on the master module of the switch. The Korry part number of the master module with the configuration "D" marked is as follows:

<u>Korry Switch P/N</u>	<u>Korry Master Module P/N</u>
433-673-1001-1060	13202-001
433-673-1001-1061	13206-001
433-673-1001-1062	13206-001
433-673-1004-4006	13203-001
433-673-1004-4060	13202-001
433-673-1004-4061	13206-001
433-673-1004-4062	13206-001

- E. The following table may be used to find the interchangeability information for the S231T290 series flight deck pushbutton switches. The corresponding vendor part number is shown in parentheses along with the cage code. The last two digits denoted by 'XX' should match between the old part and interchangeable part numbers. The old part number may be used as a replacement unless noted differently:

<u>Old Part Number</u>	<u>Interchangeable Part Number</u>
S231T290-10XX *[1]	S231T290-42XX
(433-673-1001-10XX (V81590))	(4336731004-42XX (V81590))
S231T290-11XX *[1]	S231T290-43XX
(433-673-1001-11XX (V81590))	(4336731004-43XX (V81590))
S231T290-20XX	S231T290-42XX
(851-30768-20XX (V96182))	(4336731004-42XX (V81590))
S231T290-30XX	S231T290-42XX
(851-30768-30XX (V96182))	(4336731004-42XX (V81590))
S231T290-31XX	S231T290-43XX
(851-30768-31XX (V96182))	(4336731004-43XX (V81590))
S231T290-40XX *[1]	S231T290-42XX
(433-673-1004-40XX (V81590))	(4336731004-42XX (V81590))
S231T290-41XX *[1]	S231T290-43XX
(433-673-1004-41XX (V81590))	(4336731004-43XX (V81590))

*[1] The old part number may be used as a replacement where the old part number contains configuration "D" master module. See para D. for additional information.

ILLUSTRATED PARTS LIST

1. This section lists and illustrates replaceable or repairable component parts. The Illustrated Parts Catalog contains a complete explanation of the Boeing part numbering system.

2. Indentures show parts relationships as follows:

Assembly

Detail Parts for Assembly

Subassembly

Attaching Parts for Subassembly

Detail Parts for Subassembly

Detail Installation Parts (Included only if installation parts may be returned to shop as part of assembly)

3. One use code letter (A, B, C, etc.) is assigned in the EFF CODE column for each variation of top assembly. All listed parts are used on all top assemblies except when limitations are shown by use code letter opposite individual part entries.

4. Letter suffixes (alpha-variants) are added to item numbers for optional parts, Service Bulletin modification parts, configuration differences (except left- and right-hand parts), product improvement parts, and parts added between two sequential item numbers. The alpha-variant is not shown on illustrations when appearance and location of all variants of the parts is the same.

5. Service Bulletin modifications are shown by the notations PRE SB XXXX and POST SB XXXX.

A. When a new top assembly part number is assigned by Service Bulletin, the notations appear at the top assembly level only. The configuration differences at detail part level are then shown by use code letter.

B. When the top assembly part number is not changed by the Service Bulletin, the notations appear at the detail part level.

6. Parts Interchangeability

Optional
(OPT)

The parts are optional to and interchangeable with (I/W) other parts having the same item number.

Supersedes, Superseded By
(SUPSDS, SUPSD BY)

The part supersedes and is not interchangeable with the original part.

Replaces, Replaced By
(REPLS, REPLD BY)

The part replaces and is interchangeable with, or is an alternate to, the original part.

26-15-51

VENDORS

K0673 PAGE AEROSPACE LTD
FORGE LANE
SUNBURY-ON-THAMES, MIDDLESEX TW16 6EQ ENGLAND
FORMERLY PAGE ENGINEERING CO LTD

01526 GENICOM CORP
ONE GENICOM DRIVE
WAYNESBORO, VIRGINIA 22980-1999
FORMERLY GE SPECIALY CONTROL & DATA COMMUNICATIONS PROD DEPT

03743 APPLETON ELECTRIC CO DIV OF EMERSON ELECTRIC CO
2205 12TH AVENUE
SOUTH MILWAUKEE, WISCONSIN 53172-2541
FORMERLY IN CHICAGO, ILLINOIS

05617 IDD AEROSPACE CORP
18225 NORTHEAST 76TH STREET PO BOX 97056
REDMOND, WASHINGTON 98073-9756
FORMERLY FARWEST ELEC INC; FORMERY IN BELLEVUE, WA;
FORMERLY BELL IND FARWEST MFG DIV; FORMERLY BELL IND
ILLUMINATED DISPLAYS DIV

08524 DEUTSCH FASTENER CORP SEE CODE V97928

09026 BABCOCK ELECTRONICS CORP CONTROL PRODUCT DIV SEE
ESTERLINE ELECTRONICS CORP V82050

12324 DUPREE INC STAKE FASTENER CO
14395 RAMONA PO BOX 1797
CHINO, CALIFORNIA 91708
FORMERLY DUPREE MFG CO IN SOUTH EL MONTE, CALIFORNIA
FORMERLY STAKE FASTENER CO DIV OF DUPREE INC

15653 FAIRCHILD FASTENERS KAYNAR PRODUCTS DIV
800 S STATE COLLEGE BLVD
FULLERTON, CALIFORNIA 92831-3001
FORMERLY VK6405 MICRODOT AEROSP LTD; FORMERLY KAYNAR TECH
KAYNAR DIV

35344 LEACH CORP RELAY DIV SEE LEACH CORP CONTROL PROD DIV V58657

51896 SPECTRA LUX CORP
11825 120TH AVENUE NORTHEAST
KIRKLAND, WASHINGTON 98034
FORMERLY IN BELLEVUE, WASHINGTON

26-15-51

ILLUSTRATED PARTS LIST
01.1 Page 1002
Jul 01/02

VENDORS

58614 COMMUNICATIONS INSTRUMENTS INC
HWY 74 EAST, PO BOX 520
FAIRVIEW, NORTH CAROLINA 28730

60119 MONADNOCK CO THE
18301 ARENTH AVENUE PO BOX 1222
CITY OF INDUSTRY, CALIFORNIA 91749
FORMERLY UNITED CARR FASTENER CORP VB0051 VB0056 VB0076
FORMERLY TRW ELECTRONIC COMPONENTS CINCH-MONADNOCK DIV
FORMERLY CINCH-MONADNOCK DIV OF TRW INC V76530

71482 CP CLARE CORP NORTH AMERICA SALES OPERATIONS
601B CAMPUS DRIVE
ARLINGTON HEIGHTS, ILLINOIS 60004
FORMERLY CLARE DIV OF GENERAL INSTRUMENT CORP
FORMERLY IN CHICAGO, ILLINOIS

72794 DZUS FASTENER COMPANY, INCORPORATED
425 UNION BOULEVARD
WEST ISLIP, NEW YORK 11795-3123
FORMERLY IN BABYLON, NEW YORK

72962 HARVARD INDUSTRIES INC
3 WERNER WAY SUITE 210
LEBANON, NEW JERSEY 08833
FORMERLY AMERACE CORP ESNA DIV
FORMERLY ELASTIC STOP NUT IN UNION, NJ

81590 KORRY ELECTRONIC INC SUB OF CRITON CORP
901 DEXTER AVENUE NORTH
SEATTLE, WASHINGTON 98109-3515
FORMERLY KORRY, BORIS VB0021 AND KORRY MFG CO

88245 WINCHESTER ELECTRONICS LITTON SYSTEMS INC USECO DIV
13536 SATICOY STREET
VAN NUYS, CALIFORNIA 91409
FORMERLY U.S. ENGINEERING CO V88245 AND LITTON PRECISION
PRODUCTS INC USECO DIV LITTON IND AND LITTON SYSTEMS
INC USECO DIV

95266 O E C O CORP
4607 SE INTERNATIONAL WAY
MILWAUKIE, OREGON 97222
FORMERLY OSBOURNE ELECTRIC IN PORTLAND, OREGON

26-15-51

VENDORS

96182 EATON CORP AEROSPACE AND COMMERCIAL CONTROLS DIV MSC PROD
1640 MONROVIA
COSTA MESA, CALIFORNIA 92627-4405
FORMERLY MASTER SPECIALITIES CO IN GARDENA, CALIFORNIA

26-15-51

ILLUSTRATED PARTS LIST
01.1 Page 1004
Jul 01/02

REFERENCE DESIGNATOR INDEX (SEE SCHEMATIC DIAGRAM)		
REFERENCE DESIGNATOR	PART NUMBER	FIG-ITEM
CR1	JANTX1N5061	1-115
CR1	JANTX1N5061	2-125
CR1	JANTX1N5061	3-145
CR1	JANTX1N5618	1-115B
CR1	JANTX1N5618	137A
CR1	JANTX1N5618	2-125A
CR1	JANTX1N5618	151
CR1	JANTX1N5618	3-145A
CR1	JANTX1N56918	4-105
CR1-CR4	JANTX1N5618	1-137
CR1-CR4	JANTX1N5618	3-175
CR2	JANTX1N5061	1-115
CR2	JANTX1N5061	2-125
CR2	JANTX1N5061	3-145
CR2	JANTX1N5618	1-115B
CR2	JANTX1N5618	137A
CR2	JANTX1N5618	2-125A
CR2	JANTX1N5618	151
CR2	JANTX1N5618	3-145A
CR2	JANTX1N56918	4-105
CR3	JANTX1N56918	110
CR4	JANTX1N56918	110
J1	800-000121-1	2-50A
J1	800-000121-1	3-50
J1	800-000121-1	4-45
J1	800000121-1	1-40A
J1	800000121-1	2-50
J2	BACC45FN18-31P6	1-90
J2	BACC45FN18-31P6	2-100
J2	BACC45FN18-31P6	3-125

26-15-51

REFERENCE DESIGNATOR INDEX (SEE SCHEMATIC DIAGRAM)		
REFERENCE DESIGNATOR	PART NUMBER	FIG-ITEM
J2	BACC45FN18-31P6	4-100
J3	BACC45FN18-31P7	1-95
J3	BACC45FN18-31P7	2-105
J3	BACC45FN18-31P7	3-120
J3	BACC45FN18-31P7	4-95
K1	3SAV1338A2	1-120
K1	3SAV1338A2	136
K1	3SAV1338A2	2-130
K1	3SAV1338A2	152
K1	3SAV1338A2	3-150
K1	3SAV1338A2	3-180
K1	3SAV1338A2	4-115
K2	3SAV1338A2	1-120
K2	3SAV1338A2	136
K2	3SAV1338A2	2-130
K2	3SAV1338A2	152
K2	3SAV1338A2	3-150
K2	3SAV1338A2	180
K2	3SAV1338A2	4-115
L1	BCREF6139	1-35A
L1	BCREF6139	35G
L1	BCREF6139	2-40B
L1	BCREF6139	3-40
L1	BCREF6139	4-35
L1	BCREF6140	1-35B
L1	BCREF6751	35C
L1	BCREF6751	35D
L1	BCREF6751	2-40
L1	BCREF6751	3-40A
L1	BCREF6751	4-35A

26-15-51

REFERENCE DESIGNATOR INDEX (SEE SCHEMATIC DIAGRAM)		
REFERENCE DESIGNATOR	PART NUMBER	FIG-ITEM
L1	BCREF8528	1-35M
L1	BCREF8528	2-40C
L1	BCREF8567	1-35K
L1	BCREF8567	2-40A
L2	BCREF6752	1-37B
L2	BCREF6752	37C
L2	BCREF6752	2-45
L2	BCREF6752	3-45
L2	BCREF6752	4-40
L2	BCREF8568	1-37F
L2	BCREF8568	2-45A
S1	BCREFA0526	1-9F
S1	BCREFA0526	9K
S1	BCREFA0526	9M
S1	BCREFA0526	9S
S1	BCREFA0526	9W
S1	BCREFA0526	2-15A
S1	BCREFA0526	15C
S1	BCREFA0526	15G
S1	BCREFA0526	15K
S1	BCREF7750	1-9B
S1	BCREF7750	9J
S1	BCREF7750	9Q
S1	BCREF7750	9T
S1	BCREF7750	2-15B
S1	BCREF7750	15J
S1	BCREF7750	3-15B
S1	BCREF7750	4-15B
S1	S231T290-5061	1-9E
S1	S231T290-5061	9G
S1	S231T290-5061	9L
S1	S231T290-5061	9R
S1	S231T290-5061	9V
S1	S231T290-5061	2-15
S1	S231T290-5061	15F
S1	4336731004-4261	15E
S1	851-30768-2061	1-9
S1	851-30768-2061	9C
S1	851-30768-2061	3-15
S1	851-30768-2061	4-15
S1	851-30768-3061	1-9A
S1	851-30768-3061	9D
S1	851-30768-3061	9H
S1	851-30768-3061	9P
S1	851-30768-3061	3-15A

26-15-51

REFERENCE DESIGNATOR INDEX (SEE SCHEMATIC DIAGRAM)		
REFERENCE DESIGNATOR	PART NUMBER	FIG-ITEM
S1	851-30768-3061	4-15A
S1	851-35100-5061	1-9N
S1	851-35100-5061	9X
S1	851-35100-5061	2-15D
S1	851-35100-5061	15H
S2	BCREFA0527	1-10N
S2	BCREFA0527	10P
S2	BCREFA0527	10S
S2	BCREFA0527	10X
S2	BCREFA0527	10Z
S2	BCREFA0527	11A
S2	BCREFA0527	2-20A
S2	BCREFA0527	20C
S2	BCREFA0527	20G
S2	BCREFA0527	20K
S2	BCREF7751	1-10E
S2	BCREF7751	10L
S2	BCREF7751	10V
S2	BCREF7751	10Y
S2	BCREF7751	2-20B
S2	BCREF7751	20J
S2	BCREF7751	3-20B
S2	BCREF7751	4-20B
S2	S231T290-5062	1-10J
S2	S231T290-5062	10K
S2	S231T290-5062	10R
S2	S231T290-5062	10W
S2	S231T290-5062	11
S2	S231T290-5062	2-20
S2	S231T290-5062	20F

26-15-51

REFERENCE DESIGNATOR INDEX (SEE SCHEMATIC DIAGRAM)		
REFERENCE DESIGNATOR	PART NUMBER	FIG-ITEM
S2	4336731004-4262	20E
S2	851-30768-2062	1-10B
S2	851-30768-2062	10F
S2	851-30768-2062	3-20
S2	851-30768-2062	4-20
S2	851-30768-3062	1-10D
S2	851-30768-3062	10G
S2	851-30768-3062	10Q
S2	851-30768-3062	10U
S2	851-30768-3062	3-20A
S2	851-30768-3062	4-20A
S2	851-35100-5062	1-10T
S2	851-35100-5062	11B
S2	851-35100-5062	2-20D
S2	851-35100-5062	20H
S3	BCREFA0525	1-15T
S3	BCREFA0525	15U
S3	BCREFA0525	16D
S3	BCREFA0525	16F
S3	BCREF10576	15Y
S3	BCREF10576	16J
S3	BCREF10576	17J
S3	BCREF10576	17N
S3	BCREF10576	2-25B
S3	BCREF10576	25C
S3	BCREF10576	2-25H
S3	BCREF10576	25K
S3	BCREF7749	1-15E
S3	BCREF7749	15M
S3	BCREF7749	16B

26-15-51

REFERENCE DESIGNATOR INDEX (SEE SCHEMATIC DIAGRAM)		
REFERENCE DESIGNATOR	PART NUMBER	FIG-ITEM
S3	BCREF7749	16E
S3	BCREF7749	17A
S3	BCREF7749	17M
S3	BCREF7749	3-25B
S3	BCREF7749	4-25B
S3	S231T290-5060	1-15K
S3	S231T290-5060	15L
S3	S231T290-5060	15X
S3	S231T290-5060	16C
S3	S231T290-5060	16H
S3	S231T290-5060	2-25A
S3	S231T290-5060	25G
S3	4336731004-4206	25E
S3	851-30768-2060	1-15B
S3	851-30768-2060	15G
S3	851-30768-2060	15P
S3	851-30768-2060	15R
S3	851-30768-2060	17B
S3	851-30768-2060	17D
S3	851-30768-2060	17E
S3	851-30768-2060	3-25
S3	851-30768-2060	4-25
S3	851-30768-3060	1-15D
S3	851-30768-3060	15H
S3	851-30768-3060	15Q
S3	851-30768-3060	15S
S3	851-30768-3060	15V
S3	851-30768-3060	15W
S3	851-30768-3060	16
S3	851-30768-3060	16A
S3	851-30768-3060	16G
S3	851-30768-3060	17
S3	851-30768-3060	17C
S3	851-30768-3060	17K
S3	851-30768-3060	17L
S3	851-30768-3060	2-25
S3	851-30768-3060	25F
S3	851-30768-3060	3-25A
S3	851-30768-3060	4-25A
S3	851-35100-5060	1-15Z
S3	851-35100-5060	16K
S3	851-35100-5060	2-25D
S3	851-35100-5060	25J
S4	BCREFA0525	1-15T
S4	BCREFA0525	15U

26-15-51

REFERENCE DESIGNATOR INDEX (SEE SCHEMATIC DIAGRAM)		
REFERENCE DESIGNATOR	PART NUMBER	FIG-ITEM
S4	BCREFA0525	16D
S4	BCREFA0525	16F
S4	BCREF10576	15Y
S4	BCREF10576	16J
S4	BCREF7749	15E
S4	BCREF7749	15M
S4	BCREF7749	16B
S4	BCREF7749	16E
S4	BCREF7749	3-25B
S4	S231T290-5060	1-15K
S4	S231T290-5060	15L
S4	S231T290-5060	15X
S4	S231T290-5060	16C
S4	S231T290-5060	16H
S4	S231T290-5060	2-25A
S4	S231T290-5060	25G
S4	4336731004-4206	25E
S4	851-30768-2060	1-15B
S4	851-30768-2060	15G
S4	851-30768-2060	15P
S4	851-30768-2060	15R
S4	851-30768-2060	3-25
S4	851-30768-3060	1-15D
S4	851-30768-3060	15H
S4	851-30768-3060	15Q
S4	851-30768-3060	15S
S4	851-30768-3060	15V
S4	851-30768-3060	15W
S4	851-30768-3060	16
S4	851-30768-3060	16A
S4	851-30768-3060	1-16G
S4	851-30768-3060	2-25
S4	851-30768-3060	25F
S4	851-30768-3060	3-25A
S4	851-35100-5060	1-15Z
S4	851-35100-5060	16K
S5	D455-07-001	50A
S5	D455-07-001	2-60A
S5	D455-08-001	1-50
S5	D455-08-001	2-60
S39	D455-07-001	1-50C
S39	D455-07-001	3-60
S39	D455-07-001	4-55
S39	D455-08-001	1-50B
S39	D455-08-001	3-60A

26-15-51

REFERENCE DESIGNATOR INDEX (SEE SCHEMATIC DIAGRAM)		
REFERENCE DESIGNATOR	PART NUMBER	FIG-ITEM
S39	D455-08-001	4-55A
T1-T4	4443B9	1-130
T1-T4	4443B9	138A
T1-T4	4443B9	2-145
T1-T4	4443B9	154
T1-T4	4443B9	3-165
T1-T4	4443B9	4-125
T1-T6	4443B9	1-138
T1-T6	4443B9	3-190
T5	4443B9	4-127
T6	4443B9	127
XK1	451120-026	1-125
XK1	451120-026	136C
XK1	451120-026	2-140
XK1	451120-026	153
XK1	451120-026	3-160
XK1	451120-026	185
XK1	451120-026	4-120
XK2	451120-026	1-125
XK2	451120-026	136C
XK2	451120-026	2-140
XK2	451120-026	153
XK2	451120-026	3-160
XK2	451120-026	185
XK2	451120-026	4-120

26-15-51

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED

 **BOEING**
COMPONENT
MAINTENANCE MANUAL

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
BACC45FN18-31P6		1	90	1
		2	100	1
		3	125	1
		4	100	1
BACC45FN18-31P7		1	95	1
		2	105	1
		3	120	1
		4	95	1
BACN10NW1		1	85	4
		1	87	2
		2	95	6
		3	110	4
		3	115	2
		4	90	4
BACN10PA06-6		1	65	3
		2	75	3
		3	80	3
		4	70	3
BACP10U0337N		1	75	1
		2	85	1
		3	90A	1
BACR13CD2		1	120	2
		1	136	2
		2	130	2
		2	152	2
		3	150	2
		3	180	2
		4	115	2
		2	90A	6
BACS12HN04-5		2	110A	4
BACS12HN06-5		2	110A	4
BACS21DD1B		1	70	4
		2	80	4
		3	85	4
		4	75	4

26-15-51

ILLUSTRATED PARTS LIST
01.1 Page 1013
Jul 01/02

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
BACS21DX1B		1	70A	4
		2	80A	4
		3	85A	4
		4	75A	4
BACW10EC06S		2	115A	4
BCREFA0525		1	15T	2
		1	16D	2
BCREFA0526		1	9F	1
		2	15A	1
BCREFA0527		1	10N	1
		1	11A	1
		2	20A	1
BCREF10576		1	15Y	2
		1	16J	2
		1	17J	1
		2	25B	1
BCREF6139		1	35A	1
		2	40B	1
		3	40	1
		4	35	1
BCREF6140		1	35B	1
		2	40	1
		3	40A	1
		4	35A	1
BCREF6752		1	37B	1
		2	45	1
		3	45	1
		4	40	1
BCREF7749		1	15E	2
		1	16B	2
BCREF7749		1	17A	1
		3	25B	2
		4	25B	1
		1	9B	1
BCREF7750		2	15B	1
		3	15B	1
		4	15B	1
		1	10E	1
BCREF7751		2	20B	1
		3	20B	1
		4	20B	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1014
 Jul 01/02

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
BCREF8528		1	35M	1
		2	40C	1
BCREF8567		1	35K	1
		2	40A	1
BCREF8568		1	37F	1
		2	45A	1
BR16S233		1	120	2
		1	136	2
		2	130	2
		2	152	2
		3	150	2
		3	180	2
		4	115	2
DBMB1400-6A1		1	70	4
		2	80	4
		3	85	4
		4	75	4
D455-07-001		1	50A	1
		2	60A	1
		3	60	1
		4	55	1
D455-08-001		1	50	1
		2	60	1
		3	60A	1
		4	55A	1
EE4AA005		1	120	2
		1	136	2
		2	130	2
		2	152	2
		3	150	2
		3	180	2
		4	115	2
FH6C5TPKL12BN FH8C7TPKL12BN HFW1204K01		2	65A	4
		2	55A	4
		1	120	2
		1	136	2
		2	130	2
		2	152	2
		3	150	2
		3	180	2
		4	115	2

26-15-51

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
HFW1206K03		1	120	2
		1	136	2
		2	130	2
		2	152	2
		3	150	2
		3	180	2
		4	115	2
		4	115	2
JANTX1N5061		1	115	2
		2	125	2
		3	145	2
JANTX1N5618		1	115B	2
		1	137	4
		1	137A	2
		2	125A	2
		2	151	2
		3	145A	2
		3	175	4
		4	105	2
JANTX1N56918		4	110	2
		4	110	2
K19798-04		1	85	4
		1	87	2
		2	95	6
		3	110	4
		3	115	2
		4	90	4
MS35338-40		1	123	1
		2	135	1
		3	155	1
MS35338-41		1	110	4
		1	139D	4
		2	115	4
		3	135	4
		4	140	4

26-15-51

233N6100
 DASH NUMBER LIMITED
 233N6203
 DASH NUMBERS LIMITED

 **BOEING**
 COMPONENT
 MAINTENANCE MANUAL

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
M39029-1-16-20		1	150	1
		3	210	1
		4	155	1
NAS1801-04-5		1	80A	4
		1	83A	2
		2	90	6
		3	100	4
		3	105	2
		4	85	4
NAS1801-06-5		1	105A	4
		1	139C	4
		2	110	4
		3	130	4
		4	135	4
		4	135	4
NAS514P632-5		1	60	4
		2	65	4
		3	75	4
		4	65	4
NAS514P832-7		1	45	4
		2	55	4
		3	55	4
		4	50	4
PFSC35-38ASEMB		1	70A	4
		2	80A	4
		3	85A	4
		4	75A	4
RMA4812-160-40		1	85	4
		1	87	2
		2	95	6
		3	110	4
		3	115	2
		4	90	4
		4	90	4

26-15-51

ILLUSTRATED PARTS LIST
 01.1 Page 1017
 Jul 01/02

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
SF6G6CBB5D		1	65	3
		2	75	3
		3	80	3
SF6G6CBB5D		4	70	3
		1	15E	2
		1	16B	2
		1	17A	1
S231T290-1060		3	25B	2
		4	25B	1
		1	9B	1
		2	15B	1
S231T290-1061		3	15B	1
		4	15B	1
		1	10E	1
S231T290-1062		2	20B	1
		3	20B	1
		4	20B	1
S231T290-2060		1	15B	2
		1	17B	1
		3	25	2
S231T290-2061		4	25	1
		1	9	1
		3	15	1
S231T290-2062		4	15	1
		1	10B	1
		3	20	1
S231T290-3060		4	20	1
		1	15D	2
		1	16	2
		1	17	1
S231T290-3061		2	25	2
		3	25A	2
		4	25A	1
		1	9A	1
S231T290-3062		3	15A	1
		4	15A	1
		1	10D	1
		3	20A	1
		4	20A	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1018
 Jul 01/02

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
S231T290-4006		1	15Y	2
		1	16J	2
		1	17J	1
		2	25B	1
S231T290-4060		1	15T	2
		1	16D	2
S231T290-4061		1	9F	1
		2	15A	1
S231T290-4062		1	10N	1
		1	11A	1
		2	20A	1
S231T290-5060		1	15K	2
		1	16C	2
		2	25A	2
S231T290-5061		1	9E	1
		2	15	1
S231T290-5062		1	10J	1
		1	11	1
		2	20	1
S231T290-801		1	20	1
		1	27A	1
		3	35E	1
		4	30A	1
S231T290-804		1	25	1
		3	30A	1
		3	35A	1
S231T290-811		1	20A	1
		1	27	1
		3	35B	1
		4	30	1
S231T290-814		1	25A	1
		3	30	1
		3	35	1
S231T290-821		1	20F	1
		1	27C	1
		2	30	1
		3	35C	1
S231T290-824		4	30B	1
		1	25F	1
		2	35	1
		3	30C	1
S231T300-1015		1	35A	1
		2	40B	1
		3	40	1
		4	35	1

26-15-51

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
S231T300-1016		1	35B	1
		2	40	1
		3	40A	1
		4	35A	1
S231T300-1229		1	37B	1
		2	45	1
		3	45	1
		4	40	1
S231T300-2015		1	35M	1
		2	40C	1
S231T300-2228		1	35K	1
		2	40A	1
S231T300-2229		1	37F	1
		2	45A	1
S233T100-5501		3	5	1
S233T100-567		4	5	1
S233T100-573		2	5A	1
10-61318-16		1	50A	1
		2	60A	1
		3	60	1
		4	55	1
10-61318-17		1	50	1
		2	60	1
		3	60A	1
		4	55A	1
233N3250-27		1	135	1
		2	150	1
		3	170	1
233N6203-10		1	145	1
		2	155	1
		3	205A	1
233N6203-1007		1	7V	RF
233N6203-1009		1	7W	RF
233N6203-1012		1	7X	RF
233N6203-1013		1	7Y	RF
233N6203-1021		1	7Z	RF
233N6203-1023		1	6	RF
233N6203-1024		1	8	RF
233N6203-103		1	2T	RF
233N6203-1032		1	8A	RF
233N6203-1035		1	8B	RF
233N6203-1036		1	8C	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1020
 Jul 01/03

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
233N6203-104		1	2U	RF
233N6203-1045		1	6A	RF
233N6203-1046		1	6B	RF
233N6203-1047		1	8D	RF
233N6203-1048		1	6C	RF
233N6203-105		1	2V	RF
233N6203-1053		1	6D	RF
233N6203-1056		1	6E	RF
233N6203-1067		1	6F	RF
233N6203-1070		1	6G	RF
233N6203-1073		1	6H	RF
233N6203-1075		1	6J	RF
233N6203-1077		1	6K	RF
233N6203-1079		1	6L	RF
233N6203-1082		1	6M	RF
233N6203-1085		1	6N	RF
233N6203-1086		1	6P	RF
233N6203-109		1	2W	RF
233N6203-11		1	55	1
		2	70	1
		3	65A	1
233N6203-110		1	2X	RF
233N6203-1103		1	6Q	RF
233N6203-1104		1	6R	RF
233N6203-1105		1	8E	RF
233N6203-1109		1	6S	RF
233N6203-111		1	2Y	RF
233N6203-1110		1	6T	RF
233N6203-1111		1	6U	RF
233N6203-1161		1	6V	RF
		2	10H	1
233N6203-1162		1	6W	RF
		2	10J	1
233N6203-1163		1	6X	RF
		2	10K	1
233N6203-1164		1	6Y	RF
		2	10L	1
233N6203-1165		1	6Z	RF
		2	10M	1
233N6203-1169		1	8F	RF
233N6203-1170		1	8G	RF
233N6203-1171		1	8H	RF
233N6203-1172		1	8J	RF
233N6203-1187		1	8K	RF
233N6203-1188		1	8L	RF
233N6203-1189		1	8M	RF

26-15-51

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
233N6203-1190		1	7J	RF
233N6203-1194		1	8N	RF
233N6203-12		1	1	RF
		3	10A	1
233N6203-1200		1	7S	RF
233N6203-1206		1	8P	RF
233N6203-1219		1	8Q	RF
233N6203-1220		1	8R	RF
233N6203-1221		1	8S	RF
233N6203-13		1	1C	RF
		3	10B	1
233N6203-1301		1	7A	RF
		2	1F	RF
233N6203-1302		1	7B	RF
		2	1G	RF
233N6203-1303		1	7C	RF
		2	1H	RF
233N6203-1304		1	7D	RF
		2	1J	RF
233N6203-1305		1	7E	RF
233N6203-1305		2	1K	RF
233N6203-1347		1	8T	RF
		3	1L	RF
233N6203-1348		1	8U	RF
		3	1M	RF
233N6203-1349		1	8V	RF
		3	1N	RF
233N6203-1350		1	8W	RF
		4	1H	RF
233N6203-1351		1	8X	RF
		4	1J	RF
233N6203-1352		1	8Y	RF
		4	1K	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1022
 Jul 01/03

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED

 **BOEING**
COMPONENT
MAINTENANCE MANUAL

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
233N6203-1353		1	8Z	RF
		4	1L	RF
233N6203-1354		1	8AA	RF
		3	1P	RF
233N6203-1356		1	8AB	RF
		3	1Q	RF
233N6203-1358		1	8AC	RF
		4	1M	RF
233N6203-1359		1	8AD	RF
		4	1N	RF
233N6203-1381		1	8AE	RF
		3	1R	RF
233N6203-1382		1	8AF	RF
		3	1S	R
233N6203-1383		1	8AG	RF
		3	1T	RF
233N6203-1384		1	8AH	RF
		4	1P	RF
233N6203-1385		1	8AJ	RF
		4	1Q	RF
233N6203-1386		1	8AK	RF
		4	1R	RF
233N6203-1389		1	8AL	RF
		4	1S	RF
233N6203-1398		1	8AM	RF
		4	1T	RF
233N6203-14		1	145C	1
		3	205B	1
233N6203-1400		1	8AN	RF
		3	1U	RF
233N6203-1401		1	8AP	RF
		3	1V	R
233N6203-1402		1	8AQ	RF
		3	1W	RF
233N6203-1403		1	8AR	RF
		4	1U	RF
233N6203-1404		1	8AS	RF
		4	1V	R
233N6203-1405		1	8AT	RF
		4	1W	RF
233N6203-1406		1	8AU	RF
		4	1X	R

26-15-51

ILLUSTRATED PARTS LIST
01.1 Page 1023
Jul 01/03

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
233N6203-1407		1	8AV	RF
		3	1X	RF
233N6203-1409		1	8AW	RF
		3	1Y	R
233N6203-1411		1	8AX	RF
		4	1Y	RF
233N6203-1412		1	8AY	RF
		4	1Z	RF
233N6203-1413		1	8AZ	RF
		4	2	R
233N6203-1414		1	8BA	RF
		3	1Z	RF
233N6203-1415		1	8BB	RF
		3	2	
233N6203-1416		1	8BC	RF
		3	2A	RF
233N6203-1417		1	8BD	RF
		4	2A	R
233N6203-1418		1	8BE	RF
		4	2B	RF
233N6203-1419		1	8BF	RF
		4	2C	RF
233N6203-161		1	2Z	RF
		2	10	1
233N6203-162		1	3	RF
		2	10A	1
233N6203-163		1	3A	RF
		2	10B	1
233N6203-164		1	3B	RF
		2	10C	1
233N6203-165		1	3C	RF
		2	10D	1
233N6203-169		1	4C	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1024
 Jul 01/03

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
233N6203-187		1	3M	RF
233N6203-188		1	3N	RF
233N6203-189		1	3P	RF
233N6203-190		1	3Q	RF
233N6203-191		1	3R	RF
233N6203-192		1	3S	RF
233N6203-193		1	3T	RF
233N6203-194		1	3K	RF
233N6203-195		1	3U	RF
233N6203-196		1	3V	RF
233N6203-197		1	3W	RF
233N6203-198		1	3Z	RF
233N6203-2		1	55A	1
		2	70A	1
		3	65	1
233N6203-200		1	4G	RF
233N6203-206		1	3X	RF
233N6203-21		1	1H	RF
		3	10C	1
233N6203-219		1	3Y	RF
233N6203-22		1	145E	1
		3	205C	1
233N6203-220		1	3J	RF
233N6203-226		1	4B	RF
233N6203-23		1	1J	RF
233N6203-24		1	1L	RF
		3	10D	1
233N6203-25		1	145F	1
		3	205D	1
233N6203-252		2	10E	1
233N6203-3		1	75A	1
		2	85A	1
		3	90	1
233N6203-301		1	3D	RF
		2	1A	RF

26-15-51

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
233N6203-302		1	3E	RF
		2	1B	RF
233N6203-303		1	3F	RF
		2	1C	RF
233N6203-304		1	3G	RF
		2	1D	RF
233N6203-305		1	3H	RF
		2	1E	RF
233N6203-32		1	1R	RF
233N6203-33		1	145J	1
		2	155B	1
233N6203-35		1	2M	RF
233N6203-355		1	7F	RF
		2	1L	RF
233N6203-356		1	7G	RF
		2	1M	RF
233N6203-36		1	1T	RF
		4	10	1
233N6203-360		1	7H	RF
		2	1N	RF
233N6203-37		1	56	1
		4	60	1
233N6203-38		1	145K	1
		4	150	1
233N6203-4		1	145B	1
		2	155A	1
233N6203-40		1	76	1
		4	80	1
233N6203-42		1	56A	1
		4	62	1
233N6203-44		1	76A	1
233N6203-44		4	82	1
233N6203-45		1	1W	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1026
 Jul 01/03

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
233N6203-46		1	1X	RF
233N6203-47		1	2N	RF
233N6203-48		1	1Z	RF
		3	10E	1
233N6203-50		1	145M	1
		3	205E	1
233N6203-53		1	2B	RF
		3	10F	1
233N6203-56		1	2D	RF
		3	10G	1
233N6203-58		1	145Q	1
		3	205F	1
233N6203-6		1	100	1
		2	120	1
		3	140	1
233N6203-67		1	2G	RF
		4	10A	1
233N6203-68		1	145S	1
		4	150A	1
233N6203-7		1	1A	RF
		3	10	1
233N6203-70		1	2J	RF
		4	10B	1
233N6203-72		1	145U	1
		4	150B	1
233N6203-73		1	2K	RF
		4	10C	1
233N6203-74		1	145V	1
		4	150C	1
233N6203-75		1	2L	RF
		4	10D	1
233N6203-76		1	145W	1
		4	150D	1
233N6203-77		1	1Y	RF

26-15-51

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
233N6203-79		1	2P	RF
		3	10H	1
233N6203-8		1	145A	1
		3	205	1
233N6203-82		1	2Q	RF
		3	10J	1
233N6203-85		1	2R	RF
		4	10E	1
233N6203-86		1	2S	RF
233N6203-86		4	10F	1
233N6203-9		1	1B	RF
233T6100-15		1	4J	RF
		3	1B	RF
233T6100-19		1	4K	RF
		3	1C	RF
233T6100-21		1	4L	RF
		3	1D	RF
233T6100-27		1	4M	RF
		3	1E	RF
233T6100-36		1	4T	RF
		4	1A	RF
233T6100-39		1	4N	RF
		3	1F	RF
233T6100-42		1	4P	RF
		3	1G	RF
233T6100-43		1	4Q	RF
		3	1H	RF
233T6100-47		1	4U	RF
		4	1B	RF
233T6100-49		1	4V	RF
		4	1C	RF
233T6100-50		1	4W	RF
		4	1D	RF
233T6100-51		1	4X	RF
		4	1E	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1028
 Jul 01/03

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED



BOEING
COMPONENT
MAINTENANCE MANUAL

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ		
233T6100-53		1	4R	RF		
		3	1J	RF		
233T6100-56		1	4S	RF		
		3	1K	RF		
233T6100-59		1	4Y	RF		
		4	1F	RF		
233T6100-60		1	4Z	RF		
		4	1G	RF		
233T6100-9		1	4H	RF		
		3	1A	RF		
233T6200-99		1	139	1		
		3	195	1		
		4	130	1		
		1	85	4		
293162		1	87	2		
		2	95	6		
		3	110	4		
		3	115	2		
		4	90	4		
		3SAV1338A2		1	120	2
				1	136	2
				2	130	2
				2	152	2
				3	150	2
3	180			2		
4	115			2		
433-100-002				1	20F	1
		1	27C	1		
		2	30	1		
		3	35C	1		
		4	30B	1		

26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1029
Jul 01/03

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
433-100-005		1	25F	1
		2	35	1
		3	30C	1
433-673-1001-10		1	15E	2
		1	16B	2
		1	17A	1
		3	25B	2
		4	25B	1
433-673-1001-10		1	9B	1
		2	15B	1
		3	15B	1
		4	15B	1
433-673-1001-10		1	10E	1
		2	20B	1
		3	20B	1
		4	20B	1
433-673-1004-40		1	15Y	2
		1	16J	2
433-673-1004-40		1	17J	1
		2	25B	1
433-673-1004-40		1	15T	2
		1	16D	2
433-673-1004-40		1	9F	1
		2	15A	1
433-673-1004-40		1	10N	1
		1	11A	1
4336731004-4206		2	20A	1
		2	25E	2
4336731004-4261		2	15E	1
4336731004-4262		2	20E	1
434-674-1005-10		1	35A	1
		2	40B	1
		3	40	1
		4	35	1

26-15-51

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED

 **BOEING**
COMPONENT
MAINTENANCE MANUAL

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
434-674-1005-10		1	35B	1
		2	40	1
		3	40A	1
		4	35A	1
434-674-1005-12		1	37B	1
		2	45	1
		3	45	1
		4	40	1
434-674-1031-20		1	35M	1
		2	40C	1
434-674-1031-22		1	35K	1
		2	40A	1
434-674-1031-22		1	37F	1
		2	45A	1
4443B9		1	130	4
		1	138	6
		1	138A	4
		2	145	4
		2	154	4
		3	165	4
		3	190	6
		4	125	4
		4	127	2
		1	125	2
451120-026		1	136C	2
		2	140	2
		2	153	2
		3	160	2
		3	185	2
		4	120	2
		1	140	4
		2	118	4
69B46200-15		3	200	4
		4	145	4
		2	50A	1
800-000121-1		3	50	1
		4	45	1

26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1031
Jul 01/03

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
800-007123		2	5A	1
800000121-1		1	40A	1
		2	50	1
851-30768-2060		1	15B	2
		1	17B	1
		3	25	2
		4	25	1
851-30768-2061		1	9	1
		3	15	1
		4	15	1
851-30768-2062		1	10B	1
		3	20	1
		4	20	1
851-30768-3060		1	15D	2
		1	16	2
		1	17	1
		2	25	2
		3	25A	2
		4	25A	1
851-30768-3061		1	9A	1
		3	15A	1
		4	15A	1
851-30768-3062		1	10D	1
		3	20A	1
		4	20A	1
851-30768-801		1	20	1
		1	27A	1
		3	35E	1
		4	30A	1
851-30768-804		1	25	1
		3	30A	1
		3	35A	1

26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1032
Jul 01/03

233N6100
 DASH NUMBER LIMITED
 233N6203
 DASH NUMBERS LIMITED

 **BOEING**
 COMPONENT
 MAINTENANCE MANUAL

PART NUMBER	AIRLINE PART NO.	FIG.	ITEM	TTL REQ
851-30768-811		1	20A	1
		1	27	1
		3	35B	1
		4	30	1
851-30768-814		1	25A	1
		3	30	1
		3	35	1
851-35100-5060		1	15Z	2
		1	16K	2
		2	25D	1
851-35100-5061		1	9N	1
		2	15D	1
851-35100-5062		1	10T	1
		1	11B	1
		2	20D	1

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1033
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -1	233N6203-12		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-1) (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06)	A	RF
-1A	233N6203-7		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-1) (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06)	B	RF
-1B	233N6203-9		PANEL ASSY-M10444 APU AND CARGO FIRE CONT	C	RF
-1C	233N6203-13		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-1) (PRE SB 233N6203-26-03) (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06)	D	RF
-1D	233N6203-15		DELETED		
-1E	233N6203-18		DELETED		
-1F	233N6203-19		DELETED		
-1G	233N6203-20		DELETED		
-1H	233N6203-21		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-1) (PRE SB 233N6203-26-03) (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06)	J	RF
-1J	233N6203-23		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	K	RF
-1K	233N6203-17		DELETED		
-1L	233N6203-24		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-1) (PRE SB 233N6203-26-03) (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06)	M	RF
-1M	233N6203-26		DELETED		
-1N	233N6203-27		DELETED		
-1P	233N6203-28		DELETED		
-1Q	233N6203-30		DELETED		
-1R	233N6203-32		PANEL ASSY-M10444 APU AND CARGO FIRE CONT	S	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-					
-1S	233N6203-34		DELETED		
-1T	233N6203-36		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-03) (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06)	P	RF
-1U	233N6203-39		DELETED		
-1V	233N6203-41		DELETED		
-1W	233N6203-45		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	W	RF
-1X	233N6203-46		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	X	RF
-1Y	233N6203-77		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	Y	RF
-1Z	233N6203-48		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	L	RF
-2	233N6203-49		DELETED		
-2A	233N6203-51		DELETED		
-2B	233N6203-53		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	G	RF
-2C	233N6203-54		DELETED		
-2D	233N6203-56		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	Z	RF
-2E	233N6203-57		DELETED		
-2F	233N6203-59		DELETED		
-2G	233N6203-67		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	Q	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1036
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-					
-2H	233N6203-69		DELETED		
-2J	233N6203-70		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AB	RF
-2K	233N6203-73		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	R	RF
-2L	233N6203-75		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	V	RF
-2M	233N6203-35		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-03) (PRE SB 233N6203-26-02) (PRE SB 233N6203-26-06)	E	RF
-2N	233N6203-47		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-03) (PRE SB 233N6203-26-06)	H	RF
-2P	233N6203-79		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	T	RF
-2Q	233N6203-82		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	U	RF
-2R	233N6203-85		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AA	RF
-2S	233N6203-86		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AC	RF
-2T	233N6203-103		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	F	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -2U	233N6203-104		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BS	RF
-2V	233N6203-105		PANEL ASSY-M10444 APU AND CARGO FIRE CONT	AD	RF
-2W	233N6203-109		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AE	RF
-2X	233N6203-110		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AF	RF
-2Y	233N6203-111		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-06) (PRE SB 233N6203-26-10)	N	RF
-2Z	233N6203-161		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AG	RF
-3	233N6203-162		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AH	RF
-3A	233N6203-163		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AJ	RF
-3B	233N6203-164		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AK	RF
-3C	233N6203-165		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AL	RF
-3D	233N6203-301		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	AM	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1038
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -3E	233N6203-302		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	AN	RF
-3F	233N6203-303		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	AP	RF
-3G	233N6203-304		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	AQ	RF
-3H	233N6203-305		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	AR	RF
-3J	233N6203-220		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	AS	RF
-3K	233N6203-194		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	AT	RF
-3L	233N6203-221		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	AU	RF
-3M	233N6203-187		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	AV	RF
-3N	233N6203-188		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	AW	RF
-3P	233N6203-189		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	AX	RF
-3Q	233N6203-190		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AY	RF
-3R	233N6203-191		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	AZ	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -3S	233N6203-192		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BA	RF
-3T	233N6203-193		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BB	RF
-3U	233N6203-195		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BC	RF
-3V	233N6203-196		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BD	RF
-3W	233N6203-197		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BE	RF
-3X	233N6203-206		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BF	RF
-3Y	233N6203-219		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BG	RF
-3Z	233N6203-198		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BH	RF
-4	233N6203-202		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BJ	RF
-4A	233N6203-203		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-07) (PRE SB 233N6203-26-10)	BK	RF
-4B	233N6203-226		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-07) (PRE SB 233N6203-26-10)	BL	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1040
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -4C	233N6203-169		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	BM	RF
-4D	233N6203-170		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	BN	RF
-4E	233N6203-171		PANEL ASSY-M10444 APU AND G-CARGO FIRE CONT (POST SB 233N6203-26-06)	BP	RF
-4F	233N6203-172		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06)	BQ	RF
-4G	233N6203-200		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-06) (PRE SB 233N6203-26-10)	BR	RF
 -4H	233T6100-9		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	BT	RF
 -4J	233T6100-15		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	BU	RF
 -4K	233T6100-19		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	BV	RF
 -4L	233T6100-21		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	BW	RF
 -4M	233T6100-27		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	BX	RF
 -4N	233T6100-39		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	BY	RF
 -4P	233T6100-42		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	BZ	RF
 -4Q	233T6100-43		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	CA	RF
 -4R	233T6100-53		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	CB	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -4S	233T6100-56		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 3)	CC	RF
-4T	233T6100-36		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 4)	CD	RF
-4U	233T6100-47		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 4)	CE	RF
-4V	233T6100-49		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 4)	CF	RF
-4W	233T6100-50		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 4)	CG	RF
-4X	233T6100-51		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 4)	CH	RF
-4Y	233T6100-59		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 4)	CJ	RF
-4Z	233T6100-60		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 4)	CK	RF
5A	851-30768-1061		DELETED		
5B	851-30768-2061		DELETED		
-5C	S231T290-3061		DELETED		
5D	851-30768-3061		DELETED		
-5E	BCREF7750		DELETED		
-5F	851-30768-2061		DELETED		
-5G	851-30768-3061		DELETED		
-5H	S231T290-4061		DELETED		
-5J	S231T290-5061		DELETED		
-5K	S231T290-5061		DELETED		
-5L	S231T290-4061		DELETED		
-5M	BCREF7750		DELETED		
-5N	BCREFA0526		DELETED		
-5P	BCREFA0526		DELETED		
-5Q	851-30768-3061		DELETED		
-5R	S231T290-5061		DELETED		
-5S	BCREFA0526		DELETED		
-5T	851-35100-5061		DELETED		
-6	233N6203-1023		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CL	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1042
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -6A	233N6203-1045		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CM	RF
-6B	233N6203-1046		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CN	RF
-6C	233N6203-1048		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CP	RF
-6D	233N6203-1053		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CQ	RF
-6E	233N6203-1056		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CR	RF
-6F	233N6203-1067		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CS	RF
-6G	233N6203-1070		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CT	RF
-6H	233N6203-1073		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CU	RF
-6J	233N6203-1075		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CV	RF
-6K	233N6203-1077		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CW	RF
-6L	233N6203-1079		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CX	RF
-6M	233N6203-1082		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CY	RF
-6N	233N6203-1085		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	CZ	RF
-6P	233N6203-1086		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DA	RF
-6Q	233N6203-1103		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DB	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -6R	233N6203-1104		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DC	RF
-6S	233N6203-1109		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DD	RF
-6T	233N6203-1110		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DE	RF
-6U	233N6203-1111		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DF	RF
-6V	233N6203-1161		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DG	RF
-6W	233N6203-1162		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DH	RF
-6X	233N6203-1163		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DJ	RF
-6Y	233N6203-1164		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DK	RF
-6Z	233N6203-1165		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DL	RF
-7	233N6203-1226		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DM	RF
-7A	233N6203-1301		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	DN	RF
-7B	233N6203-1302		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	DP	RF
-7C	233N6203-1303		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	DQ	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1044
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -7D	233N6203-1304		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	DR	RF
-7E	233N6203-1305		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 2)	DS	RF
-7F	233N6203-355		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 2)	DT	RF
-7G	233N6203-356		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 2)	DU	RF
-7H	233N6203-360		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (FOR DETAILS SEE FIG. 2)	DV	RF
-7J	233N6203-1190		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DW	RF
-7K	233N6203-1191		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DX	RF
-7L	233N6203-1192		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DY	RF
-7M	233N6203-1193		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DZ	RF
-7N	233N6203-1195		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EA	RF
-7P	233N6203-1196		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EB	RF
-7Q	233N6203-1197		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EC	RF
-7R	233N6203-1198		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	ED	RF
-7S	233N6203-1200		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EE	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -7T	233N6203-1202		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EF	RF
-7U	233N6203-1203		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EG	RF
-7V	233N6203-1007		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EH	RF
-7W	233N6203-1009		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EJ	RF
-7X	233N6203-1012		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EK	RF
-7Y	233N6203-1013		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EL	RF
-7Z	233N6203-1021		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EM	RF
-8	233N6203-1024		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EN	RF
-8A	233N6203-1032		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EP	RF
-8B	233N6203-1035		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EQ	RF
-8C	233N6203-1036		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	ER	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1046
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -8D	233N6203-1047		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	ES	RF
-8E	233N6203-1105		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	ET	RF
-8F	233N6203-1169		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EU	RF
-8G	233N6203-1170		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EV	RF
-8H	233N6203-1171		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EW	RF
-8J	233N6203-1172		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EX	RF
-8K	233N6203-1187		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EY	RF
-8L	233N6203-1188		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	EZ	RF
-8M	233N6203-1189		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FA	RF
-8N	233N6203-1194		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FB	RF
-8P	233N6203-1206		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FC	RF
-8Q	233N6203-1219		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FD	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -8R	233N6203-1220		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FE	RF
-8S	233N6203-1221		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FF	RF
-8T	233N6203-1347		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	FG	RF
-8U	233N6203-1348		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	FH	RF
-8V	233N6203-1349		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	FJ	RF
-8W	233N6203-1350		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FK	RF
-8X	233N6203-1351		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FL	RF
-8Y	233N6203-1352		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FM	RF
-8Z	233N6203-1353		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FN	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1048
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -8AA	233N6203-1354		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	FP	RF
-8AB	233N6203-1356		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	FQ	RF
-8AC	233N6203-1358		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FR	RF
-8AD	233N6203-1359		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FS	RF
-8AE	233N6203-1381		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	FT	RF
-8AF	233N6203-1382		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	FU	RF
-8AG	233N6203-1383		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	FV	RF
-8AH	233N6203-1384		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FW	RF
-8AJ	233N6203-1385		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FX	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -8AK	233N6203-1386		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FY	RF
-8AL	233N6203-1389		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	FZ	RF
-8AM	233N6203-1398		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GA	RF
-8AN	233N6203-1400		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	GB	RF
-8AP	233N6203-1401		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	GC	RF
-8AQ	233N6203-1402		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	GD	RF
-8AR	233N6203-1403		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GE	RF
-8AS	233N6203-1404		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GF	RF
-8AT	233N6203-1405		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GG	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1050
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -8AU	233N6203-1406		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GH	RF
-8AV	233N6203-1407		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	GJ	RF
-8AW	233N6203-1409		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	GK	RF
-8AX	233N6203-1411		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GL	RF
-8AY	233N6203-1412		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GM	RF
-8AZ	233N6203-1413		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GN	RF
-8BA	233N6203-1414		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	GP	RF
-8BB	233N6203-1415		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	GQ	RF
-8BC	233N6203-1416		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 3)	GR	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -8BD	233N6203-1417		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GS	RF
-8BE	233N6203-1418		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GT	RF
-8BF	233N6203-1419		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10) (FOR DETAILS SEE FIG. 4)	GU	RF
9	851-30768-2061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-2061)	A,B,D E,H,J M,P,S AS-AX BF,BG EH, EK-ES EY-FF	1
9A	851-30768-3061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-3061) (OPT ITEM 9B)	G,K,L Q,R, T-AC, AY-BE BH-BR	1
-9B	BCREF7750		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1001-1061) (S1) (SPEC S231T290-1061) (OPT ITEM 9A)	G,K,L Q,R, T-AC, AY-BE BH-BR	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1052
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -9C	851-30768-2061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-2061) (OPT ITEM 9D)	C,EJ	1
-9D	851-30768-3061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-3061) (OPT ITEM 9C)	C,EJ	1
-9E	S231T290-5061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (S1) (OPT ITEM 9F)	F,AE, AF	1
-9F	BCREFA0526		.SWITCH- LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEM 9E)	F,AE, AF	1
-9G	S231T290-5061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (S1) (OPT ITEM 9H)	AD,ET	1
-9H	851-30768-3061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-3061) (OPT ITEM 9G)	AD,ET	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -9J	BCREF7750		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1001-1061) (S1) (SPEC S231T290-1061) (OPT ITEM 9K)	N,AH, AL,BS	1
-9K	BCREFA0526		.SWITCH- LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEM 9J)	N,AH, AL,BS	1
-9L	S231T290-5061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (S1) (OPT ITEMS 9M, 9N)	AG,AJ AK	1
-9M	BCREFA0526		.SWITCH-LIGHTED PUSHBUTTON IND (ARMED/FWD) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEMS 9L, 9N)	AG,AJ AK	1
-9N	851-35100-5061		.SWITCH-LIGHTED PUSHBUTTON IND (ARMED/FWD) (V96182) (S1) (OPT ITEMS 9L, 9M)	AG,AJ AK	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1054
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -9P	851-30768-3061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-3061) (OPT ITEM 9Q)	CL-DA DM, DW-EG EU-EX	1
-9Q	BCREF7750		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1061) (S1) (SPEC S231T290-1061) (OPT ITEM 9P)	CL-DA DM, DW-EG EU-EX	1
-9R	S231T290-5061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (S1) (OPT ITEM 9S)	DB,DD DE	1
-9S	BCREFA0526		.SWITCH- LIGHTED PUSH BUTTON IND (ARMED/FWD) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEM 9T)	DB,DD DE	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -9T	BCREF7750		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1061) (S1) (SPEC S231T290-1061) (OPT ITEM 9U)	DC,DF DH,DL	1
-9V	S231T290-5061		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (S1) (OPT ITEMS 9W, 9X)	DG,DJ DK	1
-9W	BCREFA0526		.SWITCH-LIGHTED PUSHBUTTON IND (ARMED/FWD) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEMS 9V, 9X)	DG,DJ DK	1
-9X	851-35100-5061		.SWITCH-LIGHTED PUSHBUTTON IND (ARMED/FWD) (V96182) (S1) (OPT ITEMS 9V, 9W)	DG,DJ DK	1
10A 10B	851-30768-1062 851-30768-2062		DELETED .SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-2062)	A,B,D E,H,J M,P,S AS-AX BF,BG EH, EL-ES EY-FF	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1056
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-			DELETED		
-10C	S231T290-3062		.SWITCH-LIGHTED PUSH BUTTON	G,K,L	1
-10D	851-30768-3062		IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-3062) (OPT ITEM 10E)	Q,R, T-AC, AY-BE BH-BR	
-10E	BCREF7751		.SWITCH-LIGHTED PUSH BUTTON	G,K,L	1
			IND (ARMED/AFT) (V81590) (433-673-1001-1062) (S2) (SPEC S231T290-1062) (OPT ITEM 10D)	Q,R, T-AC, AY-BE BH-BR	
-10F	851-30768-2062		.SWITCH-LIGHTED PUSH BUTTON	C,EJ	1
			IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-2062) (OPT ITEM 10G)		
-10G	851-30768-3062		.SWITCH-LIGHTED PUSH BUTTON	C,EJ	1
			IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-3062) (OPT ITEM 10F)		
-10H	S231T290-4062		DELETED		
-10J	S231T290-5062		.SWITCH-LIGHTED PUSH BUTTON	F,AE, AF	1
			IND (ARMED/AFT) (S2) (OPT ITEM 10N)		
-10K	S231T290-5062		.SWITCH-LIGHTED PUSH BUTTON	AD,ET	1
			IND (ARMED/AFT) (S2) (OPT ITEM 10Q)		
-10L	BCREF7751		.SWITCH-LIGHTED PUSH BUTTON	N,AH, AL,BS	1
			IND (ARMED/AFT) (V81590) (433-673-1001-1062) (S2) (SPEC S231T290-1062) (OPT ITEM 10P)		

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -10M -10N	S231T290-4062 BCREFA0527		DELETED .SWITCH-INDICATOR LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEM 10J)	F,AE, AF	1
-10P	BCREFA0527		.SWITCH-INDICATOR LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEM 10L)	N,AH, AL,BS	1
-10Q	851-30768-3062		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-3062) (OPT ITEM 10K)	AD,ET	1
-10R	S231T290-5062		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (S2) (OPT ITEMS 10S, 10T)	AG,AJ AK	1
-10S	BCREFA0527		.SWITCH-INDICATOR LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEMS 10R, 10T)	AG,AJ AK	1
-10T	851-35100-5062		.SWITCH-INDICATOR LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (OPT ITEMS 10R, 10S)	AG,AJ AK	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1058
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -10U	851-30768-3062		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-3062) (OPT ITEM 10V)	CL-DA DM, DW-EG EU-EX	1
-10V	BCREF7751		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1062) (S2) (SPEC S231T290-1062) (OPT ITEM 10U)	CL-DA DM, DW-EG EU-EX	1
-10W	S231T290-5062		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (S2) (OPT ITEM 10X)	DB,DD DE	1
-10X	BCREFA0527		.SWITCH-INDICATOR LIGHTED PUSH BUTTON IND (ARMED/AFT) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEM 10W)	DB,DD DE	1
-10Y	BCREF7751		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1062) (S2) (SPEC S231T290-1062) (OPT ITEM 10Z)	DC,DF DH,DL	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -10Z	BCREFA0527		.SWITCH-INDICATOR LIGHTED PUSH BUTTON IND (ARMED/AFT) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEM 10Y)	DC,DF DH,DL	1
-11	S231T290-5062		.SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (S2) (OPT ITEMS 11A, 11B)	DG,DJ DK	1
-11A	BCREFA0527		.SWITCH-INDICATOR LIGHTED PUSH BUTTON IND (ARMED/AFT) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEMS 11, 11B)	DG,DJ DK	1
-11B	851-35100-5062		.SWITCH-INDICATOR LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (OPT ITEMS 11, 11A)	DG,DJ DK	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1060
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
			1234567		
01- 15A 15B	851-30768-1060 851-30768-2060		DELETED .SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-2060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 T/W 433-100-005 SWITCHGUARD IN S3 POSITION) (CONT AT ITEM 15P)	A,B,D J,M,S AS-AW EH, EK-EP EY,EZ FB,FE FF	2
-15C	S231T290-3060		DELETED		

26-15-51



BOEING
 COMPONENT
 MAINTENANCE MANUAL

233N6100
 DASH NUMBER LIMITED
 233N6203
 DASH NUMBERS LIMITED

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-15D	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (CONT AT ITEM 15Q) (OPT ITEM 15E)	G,K,L T,U, W-Z, AY-BA BH, BM-BR	2

26-15-51

ILLUSTRATED PARTS LIST
 01.1 Page 1062
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -15E	BCREF7749		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V81590) (433-673-1001-1060) (S3, S4) (SPEC S231T290-1060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (OPT ITEM 15D)	G,K,L T,U, W-Z, AY-BA BH, BM-BR	2
15F	851-30768-3060		DELETED		

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-15G	851-30768-2060		1234567 .SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-2060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (CONT AT ITEM 15R) (OPT ITEM 15H)	C,EJ	2

26-15-51

ILLUSTRATED PARTS LIST
 01.1 Page 1064
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
			1234567		
01- -15H	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (CONT AT ITEM 15S) (OPT ITEM 15G)	C,EJ	2
-15J	S231T290-4060		DELETED		

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -15K	S231T290-5060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (S3, S4) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 15T)	F,AE, AF	2
-15L	S231T290-5060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (S3, S4) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 15V)	AD,ET	2

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1066
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
			1234567		
01- -15M	BCREF7749		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V81590) (433-673-1001-1060) (S3, S4) (SPEC S231T290-1060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (OPT ITEM 15U)	N,BS	2
-15N	S231T290-4060		DELETED		
-15P	851-30768-2060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-2060) (CONT FROM ITEM 15B)	A,B,D J,M,S AS-AW EH, EK-EP EY,EZ FB,FE FF	2
-15Q	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (CONT FROM ITEM 15D)	G,K,L T,U, W-Z, AY-BA BH, BM-BR	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -15R	851-30768-2060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-2060) (851-30768-2060 T/W 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 T/W 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 T/W 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (CONT FROM ITEM 15G)	C,EJ	2
-15S	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (CONT FROM ITEM 15H)	C,EJ	2

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1068
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -15T	BCREFA0525		.SWITCH INDICATOR- LIGHTED PUSH BUTTON IND (DISCH) (V81590) (433-673-1004-4060) (S3, S4) (SPEC S231T290-4060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 15K)	F,AE AF	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-15U	BCREFA0525		1234567 .SWITCH INDICATOR- LIGHTED PUSH BUTTON IND (DISCH) (V81590) (433-673-1004-4060) (S3, S4) (SPEC S231T290-4060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 15M)	N,BS	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -15V	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 851-30768-3060 S231T290-4060 OR -5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 15L)	AD,ET	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-15W	851-30768-3060		1234567 .SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION) (OPT ITEMS 15X, 15Y, 15Z)	AG, AJ AK	2

26-15-51

ILLUSTRATED PARTS LIST
 01.1 Page 1072
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -15X	S231T290-5060		.SWITCH-LIGHTED PUSHBUTTON IND (DISCH) (S3, S4) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEMS 15W, 15Y, 15Z)	AG,AJ AK	2
-15Y	BREF10576		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V81590) (433-673-1004-4006) (S3, S4) (SPEC S231T290-4006) (OPT ITEMS 15W, 15X, 15Z)	AG,AJ AK	2
-15Z	851-35100-5060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (OPT ITEMS 15W, 15X, 15Y)	AG,AJ AK	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01- -16	851-30768-3060		1234567 .SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (CONT AT ITEM 16A) (OPT ITEM 16B)	CL-CR CW-CY DW-DY ED,EE EU-EX	2
-16A	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (CONT FROM ITEM 16)	CL-CR CW-CY DW-DY ED,EE EU-EX	2

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1074
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-16B	BCREF7749		1234567 .SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1060) (S3, S4) (SPEC S231T290-1060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (OPT ITEM 16)	CL-CR CW-CY DW-DY ED,EE EU-EX	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-16C	S231T290-5060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (S3, S4) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 16D)	DB,DD DE	2

26-15-51

ILLUSTRATED PARTS LIST
 01.1 Page 1076
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -16D	BCREFA0525		.SWITCH INDICATOR- LIGHTED PUSH BUTTON IND (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4060) (S3, S4) (SPEC S231T290-4060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 16C)	DB,DD DE	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-16E	BCREF7749		1234567 .SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1060) (S3, S4) (SPEC S231T290-1060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (OPT ITEM 16F)	DC,DF	2

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1078
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -16F	BCREFA0525		.SWITCH INDICATOR- LIGHTED PUSH BUTTON IND (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4060) (S3, S4) (SPEC S231T290-4060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 16E)	DC,DF	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -16G	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 851-30768-3060 S231T290-4060 OR -5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEMS 16H, 16J, 16K)	DG,DJ DK	2

26-15-51

ILLUSTRATED PARTS LIST
 01.1 Page 1080
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -16H	S231T290-5060		.SWITCH-LIGHTED PUSHBUTTON IND (DISCH) (S3, S4) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEMS 16G, 16J, 16K)	DG,DJ DK	2
-16J	BCREFA0525		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4006) (S3, S4) (SPEC S231T290-4006) (OPT ITEMS 16G, 16H, 16K)	DG,DJ DK	2
-16K	851-35100-5060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (OPT ITEMS 16G, 16H, 16J)	DG,DJ DK	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-17	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (CONT AT ITEM 17C) (OPT ITEM 17A)	E,H,Q R,V, AA-AC BB-BG BJ-BL	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-17A	BCREF7749		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V81590) (433-673-1001-1060) (S3) (SPEC S231T290-1060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (OPT ITEM 17)	E,H,Q R,V, AA-AC BB-BG BJ-BL	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-17B	851-30768-2060		1234567 .SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-2060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (CONT AT ITEM 17D)	P,AX,ER,FA	1
-17C	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-3060) (CONT FROM ITEM 17)	E,H,Q R,V,AA-AC BB-BG BJ-BL	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -17D	851-30768-2060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-2060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCRE7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCRE7749 OR 851-30768-3060 T/W 433-100-005 SWITCHGUARD IN S3 POSITION) (CONT FROM ITEM 17B) (CONT AT ITEM 17E)	P,AX ER,FA	1
-17E	851-30768-2060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-2060) (CONT FROM ITEM 17D)	P,AX ER,FA	1
-17F	851-30768-3060		DELETED		
-17G	S231T290-5060		DELETED		
-17H	BCRE7749		DELETED		
-17J	BCRE7749		.SWITCH-LIGHTED PUSH BUTTON (DISCH) (V81590) (433-673-1004-4006) (S3) (SPEC S231T290-4006)	AH,AL	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01- -17K	851-30768-3060		1234567 .SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-002 IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 OR 851-30768-3060 BCREFA0525 OR S231T290-5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (CONT AT ITEM 17L) (OPT ITEM 17M)	CS-CV CZ,DA DM, DZ-EC EF,EG EQ,ES FC,FD	1
-17L	851-30768-3060		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-3060) (CONT FROM ITEM 17K)	CS-CV CZ,DA DM, DZ-EC EF,EG EQ,ES FC,FD	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -17M	BCREF7749		.SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1060) (S3) (SPEC S231T290-1060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (OPT ITEM 17K)	CS-CV CZ,DA DM, DZ-EC EF,EG EQ,ES FC,FD	1
-17N	BCREF10576		.SWITCH-LIGHTED PUSH BUTTON (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4006) (S3) (SPEC S231T290-4006)	DH,DL	1
20	851-30768-801		.GUARD-SWITCH (V96182) (SPEC S231T290-801) (OPT ITEM 20A)	K,M,S AW,BM EN,EP EU,EZ	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -20A	851-30768-811		. GUARD-SWITCH (V96182) (SPEC S231T290-811) (OPT ITEM 20)	K,M,S AW,BM EN,EP EU,EZ	1
-20B	851-30768-801		DELETED		
-20C	851-30768-901		DELETED		
-20D	851-30768-811		. GUARD-SWITCH (V96182) (SPEC S231T290-811)	J,AV EM,EY	1
-20E	851-30768-821		DELETED		
-20F	433-100-002		. GUARD-SWITCH (V81590) (SPEC S231T290-821)	F,G,L N,T,U W-Z, AD-AL AY-BA BH, BN-BS CM-CR CW-CY DB, DD-DM DW-DY ED,EE ET,EV EW,EX	1
-20G	851-30768-801		. GUARD-SWITCH (V96182) (SPEC S231T290-801) (OPT ITEMS 20H, 20J)	A,B,D AS-AU EH,EK EL,FB FE,FF	1
-20H	851-30768-811		. GUARD-SWITCH (V96182) (SPEC S231T290-811) (OPT ITEMS 20G, 20J)	A,B,D AS-AU EH,EK EL,FB FE,FF	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080H
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -20J	433-100-002		. GUARD-SWITCH (V81590) (SPEC S231T290-821) (OPT ITEMS 20G, 20H)	A,B,D AS-AU EH,EK EL,FB FE,FF	1
-20K	851-30768-801		. GUARD-SWITCH (V96182) (SPEC S231T290-801) (OPT ITEMS 20L, 20M FOR USE WITH S231T290-2000 SERIES SWITCHES ONLY)	C,EJ	1
-20L	851-30768-811		. GUARD-SWITCH (V96182) (SPEC S231T290-811) (OPT ITEMS 20K, 20M FOR USE WITH S231T290-2000 SERIES SWITCHES ONLY)	C,EJ	1
-20M	433-100-002		. GUARD-SWITCH (V81590) (SPEC S231T290-821) (OPT ITEMS 20K, 20L FOR USE WITH S231T290-2000 SERIES SWITCHES ONLY)	C,EJ	1
21	851-30768-811		DELETED		
25	851-30768-804		. GUARD-SWITCH (V96182) (SPEC S231T290-804) (OPT ITEM 25A)	K,M,S AW,BM CL,EN EP,EU EZ	1
-25A	851-30768-814		. GUARD-SWITCH (V96182) (SPEC S231T290-814) (OPT ITEM 25)	K,M,S AW,BM CL,EN EP,EU EZ	1
-25B	851-30768-804		DELETED		
-25C	851-30768-904		DELETED		
-25D	851-30768-814		. GUARD-SWITCH (V96182) (SPEC S231T290-814)	J,AV, EM,EY	1
-25E	851-30768-824		DELETED		

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -25F	433-100-005		. GUARD-SWITCH (V81590) (SPEC S231T290-824)	F,G,L N,T,U W-Z, AD-AL AY-BA BH, BN-BS CM-CR CW-CY DB-DL DW-DY ED,EE EH,EK EL,FB FE,FF	1
-25G	851-30768-804		. GUARD-SWITCH (V96182) (SPEC S231T290-804) (OPT ITEMS 25H, 25J)	A,B,D AS-AU EH,EK EL,FB FE,FF	1
-25H	851-30768-814		. GUARD-SWITCH (V96182) (SPEC S231T290-814) (OPT ITEMS 25G, 25J)	A,B,D AS-AU EH,EK EL,FB FE,FF	1
-25J	433-100-005		. GUARD-SWITCH (V81590) (SPEC S231T290-824) (OPT ITEMS 25G, 25H)	A,B,D AS-AU EH,EK EL,FB FE,FF	1
-25K	851-30768-804		. GUARD-SWITCH (V96182) (SPEC S231T290-804) (OPT ITEMS 25L, 25M FOR USE WITH S231T290-2000 SERIES SWITCHES ONLY)	C,EJ	1
-25L	851-30768-814		. GUARD-SWITCH (V96182) (SPEC S231T290-814) (OPT ITEMS 25K, 25M FOR USE WITH S231T290-2000 SERIES SWITCHES ONLY)	C,EJ	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080J
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -25M	433-100-005		. GUARD-SWITCH (V81590) (SPEC S231T290-824) (OPT ITEMS 25K, 25L FOR USE WITH S231T290-2000 SERIES SWITCHES ONLY)	C,EJ	1
27	851-30768-811		. GUARD-SWITCH (V96182) (SPEC S231T290-811) (OPT ITEMS 27A, 27C)	E,H,P AX,BF BG,EQ ER,ES FA,FC FD	1
-27A	851-30768-801		. GUARD-SWITCH (V96182) (SPEC S231T290-801) (OPT ITEMS 27, 27C)	E,H,P AX,BF BG,EQ ER,ES FA,FC FD	1
-27B	851-30768-821		DELETED		
-27C	433-100-002		. GUARD-SWITCH (V81590) (SPEC S231T290-821) (OPT ITEMS 27, 27A)	E,H,P AX,BF BG,EQ ER,ES FA,FC FD	1
-27D	433-100-002		. GUARD-SWITCH (V81590) (SPEC S231T290-821)	Q,R,V AA-AC BB-BE BJ-BL CS-CV CZ,DA DM, DZ-EC EF,EG EG,EF	1
35 35A	S231T300-1228 BCREF6139		DELETED . LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1015) (L1) (SPEC S231T300-1015)	G,Q,S Z, AZ-BB CQ-CS DW-DZ EP	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -35B	BCREF6140		.LIGHT ASSY-DELETED IND (V81590) (434-674-1005-1016) (L1) (SPEC S231T300-1016) (OPT ITEM 35)	A,AS, EK,FE	1
35C	BCREF6751		.LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1228) (L1) (SPEC S231T300-1228)	V,BE, BQ,CV EC,EX	1
-35D	BCREF6751		.LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1228) (L1) (SPEC S231T300-1228) (OPT ITEM 35K)	A,E,J N,R,Y AC,AE AJ,AL AS,AV BD,BF BK,BL CU,CW DA,DD DF,DJ DL,DM EB,EG EK,EM EQ,EY FC,FE	1
-35E	BCREF8423		DELETED		
-35F	BCREF8423		DELETED		

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080L
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -35G	BCREF6139		.LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1015) (L1) (SPEC S231T300-1015) (OPT ITEM 35M)	B-D,F H,K-M P,T,U W,X, AA,AB AD, AF-AH AK,AT AU, AW-AY BC, BG-BJ BM-BP BR,BS CL-CP CT, CX-CZ DB,DE DG,DH DK,DW EA, ED-EF EH,EJ EL,EN ER-EW EZ,FA FB,FD FF	1
-35H	BCREF8422		DELETED		
-35J	BCREF8422		DELETED		
-35K	BCREF8567		.LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1031-2228) (L1) (SPEC S231T300-2228) (OPT ITEM 35D)	A,E,J N,R,Y AC,AE AJ,AL AS,AV BD,BF BK,BL CU,CW DA,DD DF,DJ DL,DM EB,EG EK,EM EQ,EY FC,FE	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -35L -35M	BCREF8567 BCREF8528		DELETED .LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1031-2015) (L1) (SPEC S231T300-2015) (OPT ITEM 35G)	B-D, F H, K-M P, T, U W, X, A AA, AB AD, AF-AH AK, AT AU, AW-AY BC, BG-BJ BM-BP BR, BS CL-CP CT, CX-CZ DB, DC DE, DG DH, DK DW, EA EH, EJ EL, EN ER-EZ EZ, FA FB, FD FF	1
-35N 37 -37A 37B	BCREF8528 S231T300-1229 BCREF6141 BCREF6752		DELETED DELETED DELETED .LIGHT ASSY-APU BTL 2 DISCH IND (V81590) (434-674-1005-1229) (L2) (SPEC S231T300-1229)	V, BE, CV, EC	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080N
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -37C	BCREF6752		.LIGHT ASSY-APU BTL 2 DISCH IND (V81590) (434-674-1005-1229) (L2) (SPEC S231T300-1229) (OPT ITEM 37F)	A,E,J N,R,Y AC,AE AJ,AL AS,AV BD,BF BK,BL BQ,CU CW,DA DD,DF DJ,DL DM,EB EG,EK EM,EQ EX,EY EC,FE	1
-37D	BCREF8424		DELETED		
-37E	BCREF8424		DELETED		
-37F	BCREF8568		.LIGHT ASSY-APU BTL 2 DISCH IND (V81590) (434-674-1031-2229) (L2) (SPEC S231T300-2229) (OPT ITEM 37C)	A,E,J N,R,Y AC,AE AJ,AL AS,AV BD,BF BK,BL BQ,CU CW,DA DD,DF DJ,DL DM,EB EG,EK EM,EQ EX,EY EC,FE	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -37G 40 40A	BCREF8568 800-000121-1 800000121-1		DELETED DELETED .CONNECTOR-PWR (V05617) (J1)	A-AL, AS-BS CL-DM DW-EG EH-FF	1
45	NAS514P832-7		.SCREW	A-AL, AS-BS CL-DM DW-EG EH-FF	4
50	D455-08-001		.SWITCH-FIRE CONT (VK0673) (S5) (SPEC 10-61318-17)	A,J,N Y,AE, AJ,AL AS,AV BQ,CW DD,DF DJ,DL EK,EM EX,EY FE	1
-50A	D455-07-001		.SWITCH ASSY-FIRE CONT (VK0673) (S5) (SPEC 10-61318-16)	B-D,F K,S,W X,AD, AF-AH AK,AT AU, BM-BP BS, CL-CN DB,DC DE,DG DH,DK EH,EJ EL,EP ET-EW FB,FF	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080P
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -50B	D455-08-001		.SWITCH-FIRE CONT (VK0673) (S39) (SPEC 10-61318-17)	E,R,V AC, BD-BF BK,BL CU,CV DA,DM EB,EC EG,EQ FC	1
-50C	D455-07-001		.SWITCH ASSY-FIRE CONT (VK0673) (S39) (SPEC 10-61318-16)	G,H,L M,P,Q T,U, Z-AB, AW-BC BG-BJ BR, CP-CT CX-CZ DW-EA ED-EF EN,ER ES,EZ FA,FD	1
55	233N6203-11		.BASEPLATE ASSY	A,J,N Y,AE, AJ,AL AS,AY BQ,DD DF,DJ DL,DW EK,EM EX,FE	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -55A	233N6203-2		.BASEPLATE ASSY	B-D, F G, K-M S-U, W X, Z, AD, AF-AH AK, BM-BP, BR, BS CL-CR CX, CY DB, DC DE, DG DH, DK DH, DK EE, EH EJ, EL EN, EP ET-EW	1
56	233N6203-37		.BASEPLATE ASSY	H, P, Q AA, AB AX, BB BC, BG BJ, CS CT, CZ DZ, EA EF, ER ES, FA FD	1
-56A	233N6203-42		.BASEPLATE ASSY	E, R, V AC, BD-BF BK, BL CU, CV DA, DM EB, EC EG, EQ FC	1
			ATTACHING PARTS		

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080R
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-60	NAS514P632-5		.SCREW	A-AL, AS-BL BR,BS CL-DM DW-EG EH-FF	4
65	SF6G6CBB5D		-----*----- ..NUT- (V12324) (SPEC BACN10PA06-6)	A-AL, AS-BL BR,BS CL-DM DW-EG EH-FF	3
70	DBMB1400-6A1		..STUD ASSY- (V08524) (SPEC BACS21DD1B)	A,E,J N,V,Y AC,AE AJ,AL AS,AY BD-BF BK,BL BQ,CU CV,DA DD,DF DJ,DL DM,DW EB,EC EG,EK EM,EQ EX,FC FE	4

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-70A	PFSC35-38ASEMB		..STUD- (V72794) (SPEC BACS21DX1B)	B-D, F-H, K-M,Q S-U, W,X Z-AB, AD, AF-AH AK,AX BB,BC BG,BJ BM-BP BR,BS CL-CT CX-CZ DB,DC DE,DG DH,DK DZ,EA EE,EF EH,EJ EL,EN EP, ES-EW	4
75	BACP10U0337N		..BASEPLATE	FA,FD A,J,N Y,AE, AJ,AL AS,AV CW,DD DF,DJ DL,EK EM,EY FE	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080T
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -75A	233N6203-3		..BASEPLATE	B-D,F G,K-M S-U,W X,Z, AD, AF-AH AK,BR BS, CL-CR CX,CY DB,DC DE,DG DH,DK EE,EH EJ,EL EN,EP ET	1
76	233N6203-40		..BASEPLATE	H,P,Q AA,AB AX,BB BC,BG BJ,CS CT,CZ DZ,EA EF,ER ES,FA FD	1
-76A	233N6203-44		..BASEPLATE	E,R,V AC, BD-BF BK,BL CU,CV DA,DM EB,EC EG,EQ FC	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-80 80A	BACS12CB04-5 NAS1801-04-5		DELETED .SCREW	A-AL, AS-BL BR,BS CL-DM DW-EG EH-FF	4
83 83A	BACS12CB04-5 NAS1801-04-5		DELETED .SCREW	B-D,G K,L,S T,W-Y AT,AU AY,AZ BH,BS CL-CQ CW,CX DC,DW DX,ED EH,EJ EL,EP FB,FF	2
85	K19798-04		.NUT- (V15653) (SPEC BACN10NW1) (OPT RMA4812-160-40 (V72962)) (OPT 293162 (V60119))	A-AL, AS-BL BR,BS CL-DM DW-EG EH-FF	4
87	K19798-04		.NUT- (V15653) (SPEC BACN10NW1) (OPT RMA4812-160-40 (V72962)) (OPT 293162 (V60119))	B-D,G K,L,S T,W-Y AT,AU AY,AZ BH,BS CL-CR CX,DC DW-EJ EL,EP FB,FF	2

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080V
 Jul 01/03

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED

 **BOEING**
COMPONENT
MAINTENANCE MANUAL

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-90	BACC45FN18-31P6		.CONNECTOR-(J2)	A-AL, AS-BS CL-DM DW-FF	1
95	BACC45FN18-31P7		.CONNECTOR-(J3)	A-AL, AS-BS CL-DM DW-FF	1
100	233N6203-6		.BRACKET ASSY-SPRT	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AY,AZ BH, BM-BQ BS, CL-CQ CW,CX DB,DC DF,DF ED,EH EJ-EL EP,ET FE,FF	1
			ATTACHING PARTS		

26-15-51

ILLUSTRATED PARTS LIST
01.1 Page 1080W
Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-105 105A	BACS12CB06-5 NAS1801-06-5		1234567 DELETED .SCREW	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AY,AZ BH, BM-BQ BS, CL-CQ CW,CX DB,DC DF,DF ED,EH EJ-EL EP,ET FE,FF	4
110	MS35338-41		.WASHER -----*	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AY,AZ BH, BM-BQ BS, CL-CQ CW,CX DB,DC DF,DF ED,EH EJ-EL EP,ET FE,FF	4

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-115	JANTX1N5061		..DIODE- (CR1, CR2) (OPT ITEM 115B)	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AY,AZ BH, BM-BQ BS, CL-CQ CW,CX DB,DC DF,DF ED,EH EJ-EL EP,ET FE,FF	2
-115A	1N5061		DELETED		
-115B	JANTX1N5618		..DIODE- (CR1, CR2) (OPT ITEM 115)	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AY,AZ BH, BM-BQ BS, CL-CQ CW,CX DB,DC DF,DF ED,EH EJ-EL EP,ET FE,FF	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-120	3SAV1338A2		1234567 ..RELAY- (V01526) (SPEC BACR13CD2) (OPT BR16S233 (V09026)) (OPT EE4AA005 (V35344)) (OPT HFW1206K03 (V58614)) (OPT HFW1204K01 (V71482)) (K1, K2)	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AZ,BH BS, CL-CQ CW,CX DB-DL DW,DX EX,EH EP,ET FE,FF	2
123	MS35338-40		..WASHER	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AY,AZ BH, BM-BQ BS, CL-CQ CW,CX DB,DC DF,DF ED,EH EJ-EL EP,ET FE,FF	AR

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1080Z
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
			1234567		
01-125	451120-026		..SOCKET- (V03743) (XK1, XK2)	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AY,AZ BH, BM-BQ BS, CL-CQ CW,CX DB,DC DF,DF ED,EH EJ-EL EP,ET FE,FF	2
-125A 130	HRTS17KM 4443B9		DELETED ..TERMINAL- (V88245) (T1-T4)	A-D,F G,K,L N,S,T W-Y, AD-AL AS,AU AY,AZ BH, BM-BQ BS, CL-CQ CW,CX DB,DC DF,DF ED,EH EJ-EL EP,ET FE,FF	4

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-135	233N3250-27		1234567 ..BRACKET-SPRT	A-D, F G, K, L N, S, T W-Y, AD-AL AS, AU AY, AZ BH, BM-BQ BS, CL-CQ CW, CX DB, DC DF, DF ED, EH EJ-EL EP, ET FE, FF	1
136	3SAV1338A2		.RELAY- (V01526) (SPEC BACR13CD2) (OPT BR16S233 (V09026)) (OPT EE4AA005 (V35344)) (OPT HFW1206K03 (V58614)) (OPT HFW1204K01 (V71482)) (K1, K2)	E, H, J M, P-R U, V, Z-AC, AV-AX BA-BG BJ-BL BR, CR CT-CV CY, CZ DA, DM DY-EC EE-EG EM, EN EQ-ES EY-FA FC, FD	2

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1082
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-136C	451120-026		.SOCKET- (V03743) (XK1, XK2)	E,H,J M,P-R U,V, Z-AC, AV-AX BA-BG BJ-BL BR, CR-CV CY,CZ DA,DM DY-EC EE-EG EM,EN EQ-ES EY-FA FC,FD	2
137	JANTX1N5618		.DIODE- (CR1-CR4)	E,H,J M,Q,R U,V, Z-AC, AV-AX BA-BG BJ-BL BR, CR-CV CY,CZ DA,DM DY-EC EE-EG EM,EN EQ-ES EY-FA FC,FD	4

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
			1234567		
01- -137A	JANTX1N5618		.DIODE- (CR1, CR2)	P,AX ER,FA	2
138	4443B9		.TERMINAL- (V88245) (T1-T6)	E,H,J M,Q,R U,V, Z-AC, AV-AX BA-BG BJ-BL BR, CR-CV CY,CZ DA,DM DY-EC EE-EG EM,EN EQ-ES EY-FA FC,FD	6
-138A	4443B9		.TERMINAL- (V88245) (T1-T4)	P,AX ER,FA	4
139	233T6200-99		.BRACKET-SPRT	E,H,J M,P-R U,V, Z-AC, AV-AX BA-BG BJ-BL BR, CR-CV CY,CZ DA,DM DY-EC EE-EG EM,EN EQ-ES EY-FA FC,FD	1
			ATTACHING PARTS		

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1082B
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-139C	NAS1801-06-5		.SCREW	E,H,J M,P-R U,V, Z-AC, AV-AX BA-BG BJ-BL BR, CR-CV CY,CZ DA,DM DY-EC EE-EG EM,EN EQ-ES EY-FA FC,FD	4
139D	MS35338-41		.WASHER (XK1, XK2)	E,H,J M,P-R U,V, Z-AC, AV-AX BA-BG BJ-BL BR, CR-CV CY,CZ DA,DM DY-EC EE-EG EM,EN EQ-ES EY-FA FC,FD	4
			-----*		

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
01-140	69B46200-15		.STANDOFF	E,H,J M,P-R U,V, Z-AC, AV-AX BA-BG BJ-BL BR, CR-CV CY,CZ DA,DM DY-EC EE-EG EM,EN EQ-ES EY-FA FC,FD	4
-145	233N6203-10		.WIRE BUNDLE ASSY	A,N,Y AE,AJ AL,AS BQ,CW DD,DF DJ,DL EK,EX FE	1
-145A	233N6203-8		.WIRE BUNDLE ASSY	B,L, AT,AY CP,DW EH,FB	1
-145B	233N6203-4		.WIRE BUNDLE ASSY	C,F,K W,AD, AG,AH BM,BN BS,CL CM,DB DC,DG DH,EJ ET-EV	1

26-15-51

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED

 **BOEING**
COMPONENT
MAINTENANCE MANUAL

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01- -145C	233N6203-14		.WIRE BUNDLE ASSY	D,G, AU,AZ CQ,DX EL,FF	1
-145D	233N6203-16		DELETED		
-145E	233N6203-22		.WIRE BUNDLE ASSY	J,AV EM,EY	1
-145F	233N6203-25		.WIRE BUNDLE ASSY	M,Z, AW,BA CR,DY EN,EZ	1
-145G	233N6203-29		DELETED		
-145H	233N6203-31		DELETED		
-145J	233N6203-33		.WIRE BUNDLE ASSY	S,X, AF,AK BP,CN DE,DK EP,EW	1
-145K	233N6203-38		.WIRE BUNDLE ASSY	P,AX, ER,FA	1
-145L	233N6203-43		DELETED		
-145M	233N6203-50		.WIRE BUNDLE ASSY	T,BH, CX,ED	1
-145N	233N6203-52		DELETED		
-145P	233N6203-55		DELETED		
-145Q	233N6203-58		.WIRE BUNDLE ASSY	U,BR, CY,EE	1
-145R	233N6203-60		DELETED		
-145S	233N6203-68		.WIRE BUNDLE ASSY	Q,BB, CS,DZ	1

26-15-51


ILLUSTRATED PARTS LIST
01.1 Page 1082E
Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
01-					
-145T	233N6203-71		DELETED		
-145U	233N6203-72		.WIRE BUNDLE ASSY	AA,AB BC,BJ CT,CZ EA,EF	1
-145V	233N6203-74		.WIRE BUNDLE ASSY	R,AC, BD,BK BL,CU DA,DM EB,EG	1
-145W	233N6203-76		.WIRE BUNDLE ASSY	V,BE, CV,EC	1
-145X	233N6203-22		.WIRE BUNDLE ASSY- (REWORKED BY SB 233N6203-26-03)	E,BF, EQ,FC	1
-145Y	233N6203-25		.WIRE BUNDLE ASSY- (REWORKED BY SB 233N6203-26-03)	H,BG, ES,FD	1
-150	M39029-1-16-20		..CONTACT-PIN (V95266)	H,M,P Z,AW, AX,BA BG,DY EN,ER ES,EZ FA,FD	AR

- Item Not Illustrated

26-15-51


ILLUSTRATED PARTS LIST
01.1 Page 1082F
Jul 01/03

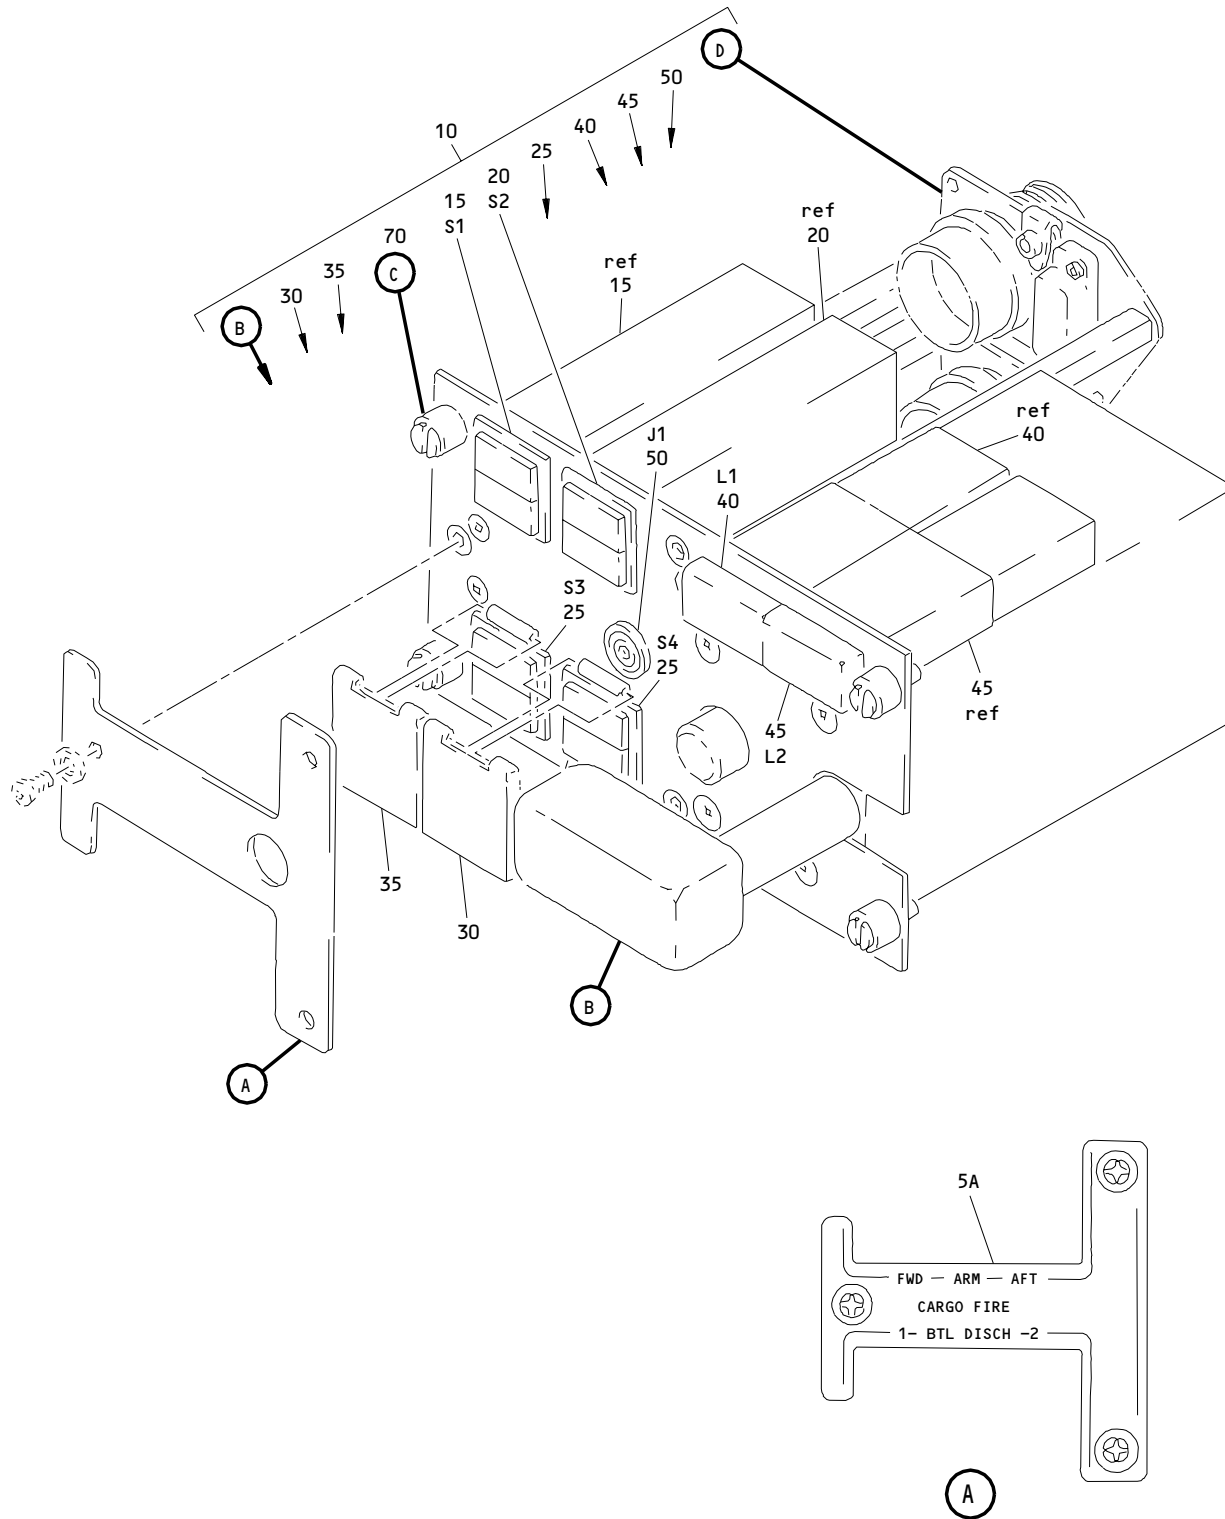

M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
 Figure 2 (Sheet 1)

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1082H
 Jul 01/03

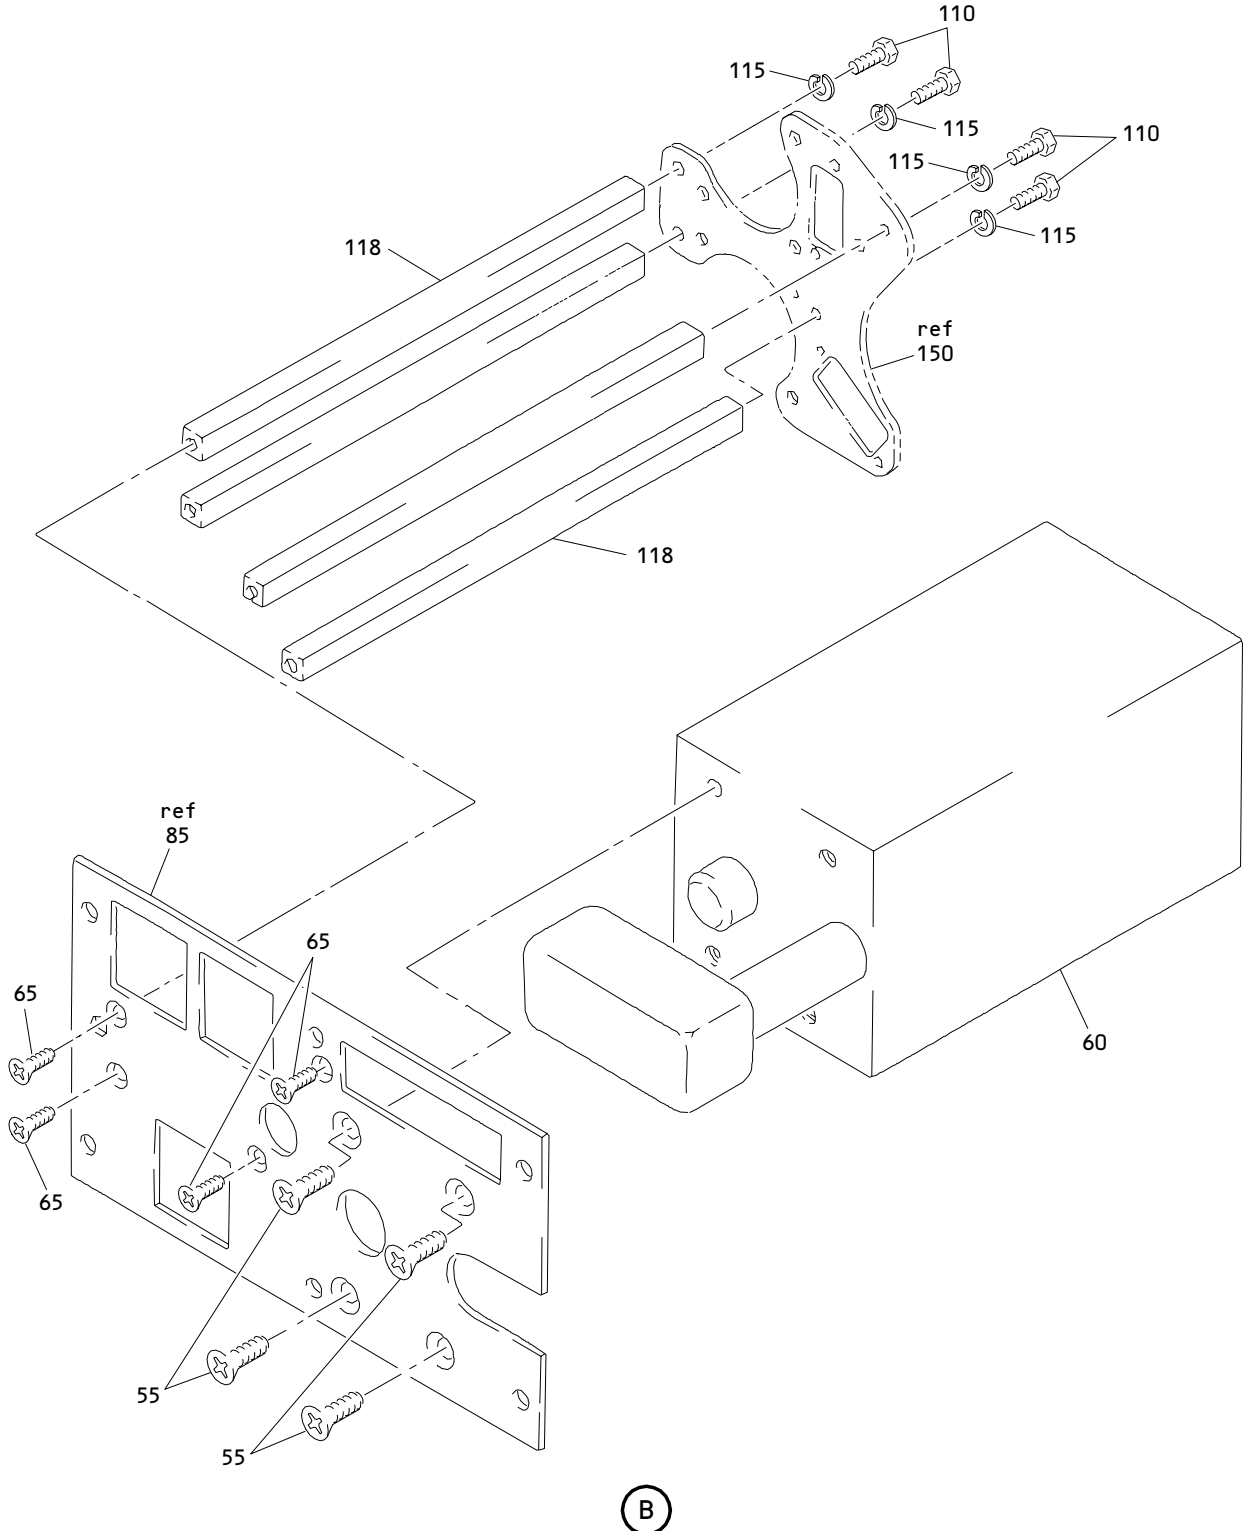

M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
Figure 2 (Sheet 2)

26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1082I
Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
02- -1A	233N6203-301		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	AM	RF
-1B	233N6203-302		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	AN	RF
-1C	233N6203-303		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	AP	RF
-1D	233N6203-304		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	AQ	RF
-1E	233N6203-305		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	AR	RF
R -1F	233N6203-1301		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DN	RF
R -1G	233N6203-1302		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DP	RF
R -1H	233N6203-1303		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DQ	RF
R -1J	233N6203-1304		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DR	RF
R -1K	233N6203-1305		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	DS	RF
R -1L	233N6203-355		PANEL ASSY-M10444 APU AND CARGO FIRE CONT	DT	RF
R -1M	233N6203-356		PANEL ASSY-M10444 APU AND CARGO FIRE CONT	DU	RF
R -1N	233N6203-360		PANEL ASSY-M10444 APU AND CARGO FIRE CONT	DV	RF
R 5 5A	S233T100-573 800-007123		DELETED .LIGHTPLATE- (V05617) (SPEC S233T100-573) (OPT S233T100-573 (V51896)) (OPT (V05617), (V98140))	AM-AR ,DN-D V	1
10	233N6203-161		.PANEL ASSY- (POST SB 233N6203-26-06)	AM	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
02-					
-10A	233N6203-162		.PANEL ASSY	AN	1
-10B	233N6203-163		.PANEL ASSY	AP	1
-10C	233N6203-164		.PANEL ASSY	AQ	1
-10D	233N6203-165		.PANEL ASSY	AR	1
R -10E	233N6203-252		.PANEL ASSY	DT	1
R -10F	233N6203-253		.PANEL ASSY	DU	1
R -10G	233N6203-257		.PANEL ASSY	DV	1
R -10H	233N6203-1161		.PANEL ASSY	DN	1
R -10J	233N6203-1162		.PANEL ASSY	DP	1
R -10K	233N6203-1163		.PANEL ASSY	DQ	1
R -10L	233N6203-1164		.PANEL ASSY	DR	1
R -10M	233N6203-1165		.PANEL ASSY	DS	1
15	S231T290-5061		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (S1) (OPT ITEMS 15A, 15D)	AM,AP ,AQ	1
-15A	BCREFA0526		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEMS 15, 15D)	AM,AP ,AQ	1
-15B	BCREF7750		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1001-1061) (S1) (SPEC S231T290-1061) (OPT ITEM 15C)	AN,AR	1
-15C	BCREFA0526		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEM 15B)	AN,AR	1
R -15D	851-35100-5061		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (OPT ITEMS 15, 15A)	AM,AP ,AQ	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 02-15E	4336731004-4261		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (S1)	DT-DV	1
R -15F	S231T290-5061		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (S1) (OPT ITEMS 15G, 15H)	DN,DQ ,DR	1
R -15G	BCREFA0526		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEMS 15F, 15H)	DN,DQ ,DR	1
R -15H	851-35100-5061		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (OPT ITEMS 15F, 15G)	DN,DQ ,DR	1
R -15J	BCREF7750		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1061) (S1) (SPEC S231T290-1061) (OPT ITEM 15K)	DP,DS	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 02-15K	BCREFA0526		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4061) (S1) (SPEC S231T290-4061) (OPT ITEM 15J)	DP,DS	1
20	S231T290-5062		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (S2) (OPT ITEMS 20A, 20D)	AM,AP, AQ	1
-20A	BCREFA0527		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEMS 20, 20D)	AM,AP, AQ	1
-20B	BCREF7751		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (433-673-1001-1062) (S2) (SPEC S231T290-1062) (OPT ITEM 20C)	AN,AR	1
-20C	BCREFA0527		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEM 20B)	AN,AR	1
R -20D	851-35100-5062		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (OPT ITEMS 20, 20A)	AM,AP, AQ	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1082N
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 02- -20E	4336731004-4262		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (S2)	DT-DV	1
R -20F	S231T290-5062		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (S2) (OPT ITEMS 20G, 20H)	DN,DQ ,DR	1
R -20G	BCREFA0527		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEMS 20F, 20H)	DN,DQ ,DR	1
R -20H	851-35100-5062		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (OPT ITEMS 20F, 20G)	DN,DQ ,DR	1
R -20J	BCREF7751		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1001-1062) (S2) (SPEC S231T290-1062) (OPT ITEM 20K)	DP,DS	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 02- -20K	BCREFA0527		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4062) (S2) (SPEC S231T290-4062) (OPT ITEM 20J)	DP,DS	1
25	851-30768-3060		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (OPT ITEMS 25A, 25B, 25D)	AM,AP ,AQ	2
-25A	S231T290-5060		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (S3, S4) (OPT ITEMS 25, 25B, 25D)	AM,AP ,AQ	2
-25B	BCREF10576		..SWITCH-LIGHTED PUSH BUTTON (DISCH) (V81590) (433-673-1004-4006) (S3) (SPEC S231T290-4006) (OPT ITEMS 25, 25A, 25D)	AM,AP ,AQ	1
-25C	BCREF10576		..SWITCH-LIGHTED PUSH BUTTON (DISCH) (V81590) (433-673-1004-4006) (S3) (SPEC S231T290-4006)	AN,AR	1
R -25D	851-35100-5060		..SWITCH-LIGHTED PUSH BUTTON (DISCH) (V96182) (S3) (OPT ITEMS 25, 25A, 25B)	AM,AP ,AQ	1
R -25E	4336731004-4206		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V81590) (S3, S4)	DT-DV	2

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1082P
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 02- -25F	851-30768-3060		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (OPT ITEMS 25G, 25H, 25J)	DN,DQ ,DR	2
R -25G	S231T290-5060		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (S3, S4) (OPT ITEMS 25F, 25H, 25J)	DN,DQ ,DR	2
R -25H	BCREF10576		..SWITCH-LIGHTED PUSH BUTTON (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4006) (S3) (SPEC S231T290-4006) (OPT ITEMS 25F, 25G, 25J)	DN,DQ ,DR	1
R -25J	851-35100-5060		..SWITCH-LIGHTED PUSH BUTTON (DISCH) (V96182) (S3) (OPT ITEMS 25F, 25G, 25H)	DN,DQ ,DR	1
R -25K	BCREF10576		..SWITCH-LIGHTED PUSH BUTTON (DISCH) (USE WITH CONFIGURATION "D" MASTER MODULE. SEE REPAIR FOR ADDITIONAL INFORMATION) (V81590) (433-673-1004-4006) (S3) (SPEC S231T290-4006)	DP,DS	1
30	433-100-002		..GUARD-SWITCH (V81590) (SPEC S231T290-821)	AM-AR ,DN-D V	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
02-35	433-100-005		..GUARD-SWITCH (V81590) (SPEC S231T290-824)	AM-AR ,DN-D V	1
40	BCREF6751		..LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1228) (L1) (SPEC S231T300-1228) (OPT ITEM 40A)	AP,AR ,DQ,D S,DV	1
-40A	BCREF8567		..LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1031-2228) (L1) (SPEC S231T300-2228) (OPT ITEM 40)	AP,AR ,DQ,D S,DV	1
-40B	BCREF6139		..LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1015) (L1) (SPEC S231T300-1015) (OPT ITEM 40C)		1
-40C	BCREF8528		..LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1031-2015) (L1) (SPEC S231T300-2015) (OPT ITEM 40B)	AM,AN ,AQ,D N,DP, DR,DT ,DU	1
45	BCREF6752		..LIGHT ASSY-APU BTL 2 DISCH IND (V81590) (434-674-1005-1229) (L2) (SPEC S231T300-1229) (OPT ITEM 45A)	AP,AR ,DQ,D S,DV	1
-45A	BCREF8568		..LIGHT ASSY-APU BTL 2 DISCH IND (V81590) (434-674-1031-2229) (L2) (SPEC S231T300-2229) (OPT ITEM 45)	AP,AR ,DQ,D S,DV	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1082R
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
02-50	800000121-1		..CONNECTOR-PWR (V05617) (J1)	AM-AR ,DN-D S	1
R -50A	800-000121-1		..CONNECTOR-PWR (V05617) (J1)	DT-DV	1
55	NAS514P832-7		..SCREW	AM-AR ,DN-D S	4
R -55A	FH8C7TPKL12BN		..SCREW- (V12324)	DT-DV	4
60	D455-08-001		..SWITCH-FIRE CONT (VK0673) (S5) (SPEC 10-61318-17)	AP,AR ,DQ,D S,DV	1
-60A	D455-07-001		..SWITCH ASSY-FIRE CONT (VK0673) (S5) (SPEC 10-61318-16)	AM,AN ,AQ,D N,DP, DR,DT ,DU	1
65	NAS514P632-5		..SCREW	AM-AR ,DN-D S	4
R -65A	FH6C5TPKL12BN		..SCREW- (V12324)	DT-DV	4
70	233N6203-11		..BASEPLATE ASSY	AP,AR ,DQ,D S,DV	1
-70A	233N6203-2		..BASEPLATE ASSY	AM,AN ,AQ,D N,DP, DR,DT ,DU	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
02-75	SF6G6CBB5D		...NUT- (V12324) (SPEC BACN10PA06-6)	AM-AR ,DN-D V	3
80	DBMB1400-6A1		...STUD ASSY- (V08524) (SPEC BACS21DD1B)	AP,AR ,DQ,D S,DV	4
R -80A	PFSC35-38ASEMB		...STUD- (V72794) (SPEC BACS21DX1B)	AM,AN ,AQ,D N,DP, DR,DT ,DU	4
85	BACP10U0337N		...BASEPLATE	AP,AR ,DQ,D S,DV	1
-85A	233N6203-3		...BASEPLATE	AM,AN ,AQ,D N,DP, DR,DT ,DU	1
90	NAS1801-04-5		..SCREW	AM-AR ,DN-D S	6
R -90A	BACS12HN04-5		..SCREW- (OPT ITEM 90B)	DT,DU	6
R -90B	NAS1801-04-5		..SCREW- (OPT ITEM 90A)	DT,DU	6
R -90C	BACS12HN04-5		..SCREW	DV	6
95	K19798-04		..NUT- (V15653) (SPEC BACN10NW1) (OPT RMA4812-160-40 (V72962)) (OPT 293162 (V60119))	AM-AR ,DN-D V	6

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
02-100	BACC45FN18-31P6		..CONNECTOR- (J2)	AM-AR ,DN-D V	1
105	BACC45FN18-31P7		..CONNECTOR- (J3)	AM-AR ,DN-D V	1
110	NAS1801-06-5		..SCREW	AM-AR ,DN-D S	4
R -110A	BACS12HN06-5		..SCREW- (OPT ITEM 110B)	DT,DU	4
R -110B	NAS1801-06-5		..SCREW- (OPT ITEM 110A)	DT,DU	4
R -110C	BACS12HN06-5		..SCREW	DV	4
115	MS35338-41		..WASHER	AM-AR ,DN-D S	4
R -115A	BACW10EC06S		..WASHER	DT-DV	4
118	69B46200-15		..STANDOFF	AM-AR ,DN-D V	4
120	233N6203-6		..BRACKET ASSY-SPRT	AM-AR ,DN-D U	1
125	JANTX1N5061		...DIODE- (CR1, CR2) (OPT ITEM 125A)	AM-AR ,DN-D U	2
-125A	JANTX1N5618		...DIODE- (CR1, CR2) (OPT ITEM 125)	AM-AR ,DN-D U	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
02-130	3SAV1338A2		...RELAY- (V01526) (SPEC BACR13CD2) (OPT BR16S233 (V09026)) (OPT EE4AA005 (V35344)) (OPT HFW1206K03 (V58614)) (OPT HFW1204K01 (V71482)) (K1, K2)	AM-AR ,DN-D U	2
135	MS35338-40		...WASHER	AM-AR ,DN-D U	AR
140	451120-026		...SOCKET- (V03743) (XK1, XK2)	AM-AR ,DN-D U	2
145	4443B9		...TERMINAL- (V88245) (T1-T4)	AM-AR ,DN-D U	4
150	233N3250-27		...BRACKET-SPRT	AM-AR ,DN-D U	1
R 151	JANTX1N5618		..DIODE- (CR1, CR2)	DV	2
R 152	3SAV1338A2		..RELAY- (V01526) (SPEC BACR13CD2) (OPT BR16S233 (V09026)) (OPT EE4AA005 (V35344)) (OPT HFW1206K03 (V58614)) (OPT HFW1204K01 (V71482)) (K1, K2)	DV	2
R 153	451120-026		..SOCKET- (V03743) (XK1, XK2)	DV	2
R 154	4443B9		..TERMINAL- (V88245) (T1-T4)	DV	4

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1082V
 Jul 01/03

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED


 **BOEING**
COMPONENT
MAINTENANCE MANUAL

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
02- -155	233N6203-10		..WIRE BUNDLE ASSY	AP,AR ,DQ,D S,DV	1
-155A	233N6203-4		..WIRE BUNDLE ASSY	AM,AN ,DN,D P,DT	1
-155B	233N6203-33		..WIRE BUNDLE ASSY	AQ,DR ,DU	1

- Item Not Illustrated

26-15-51


ILLUSTRATED PARTS LIST
01.101 Page 1082W
Jul 01/03

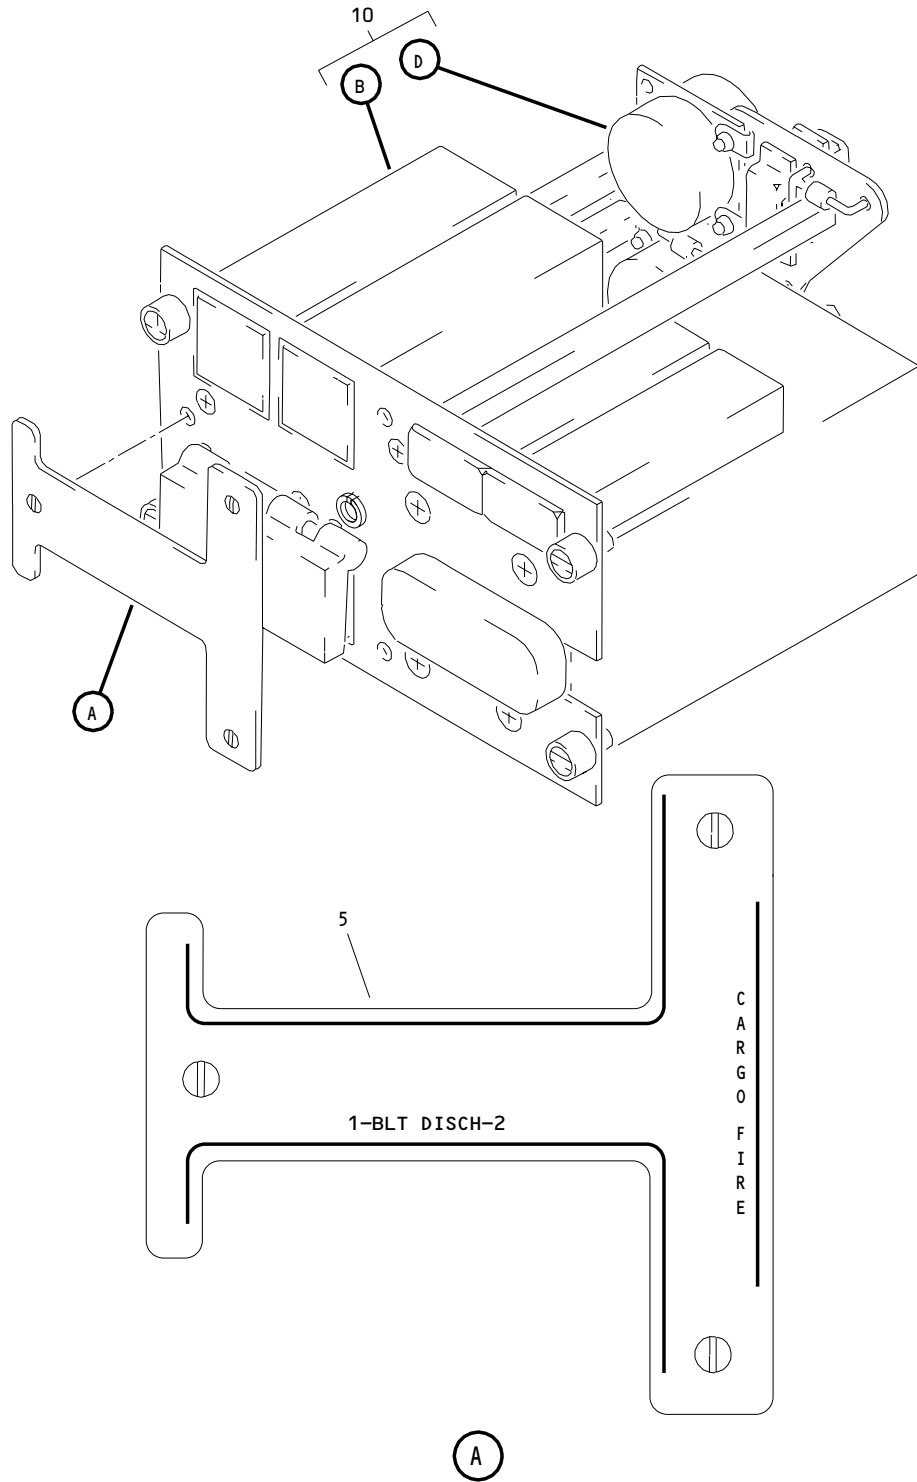

M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
Figure 3 (Sheet 1)

26-15-51


ILLUSTRATED PARTS LIST
01.101 Page 1082Y
Jul 01/03

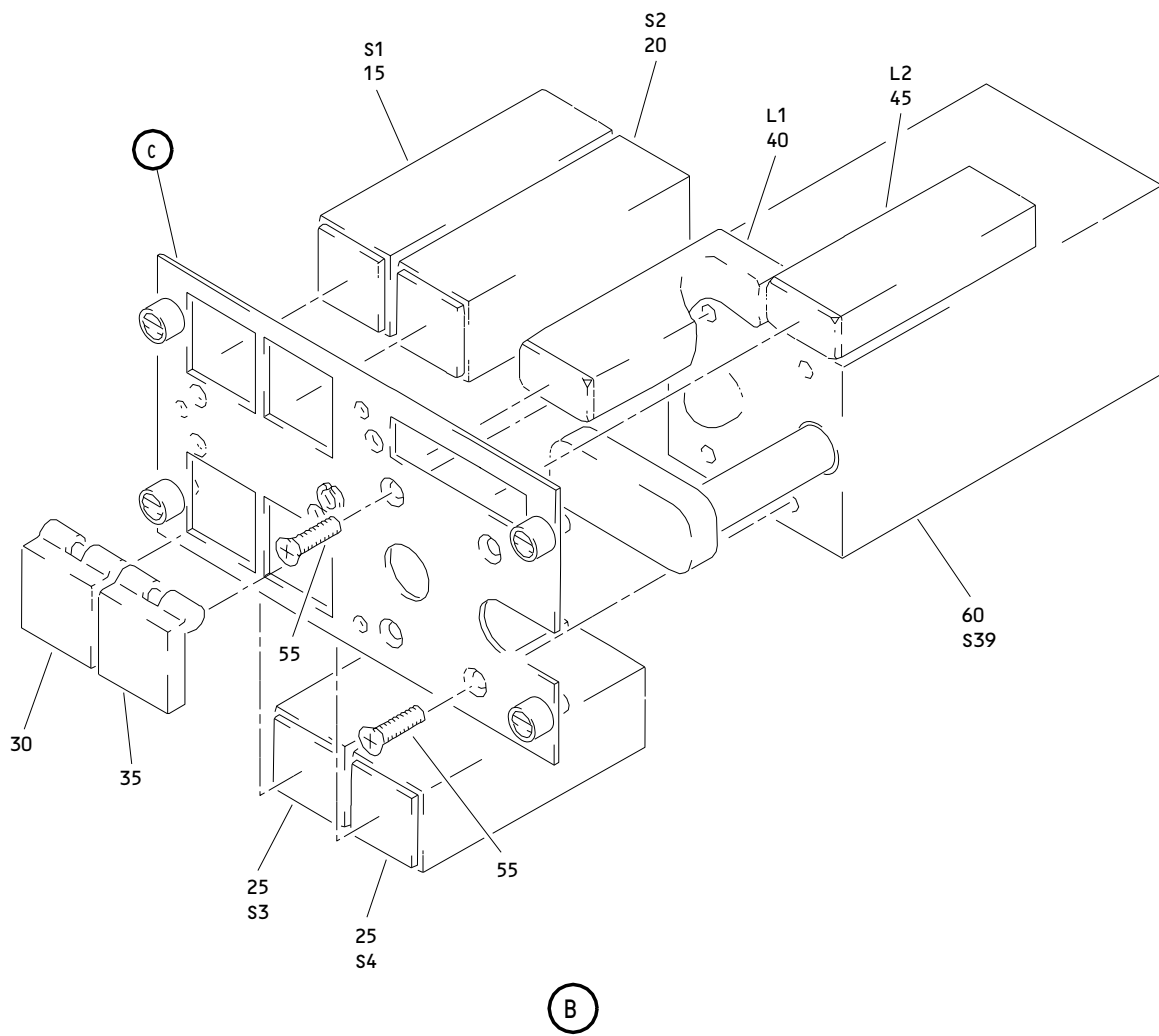

M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
Figure 3 (Sheet 2)

26-15-51


ILLUSTRATED PARTS LIST
01.101 Page 1082Z
Jul 01/03

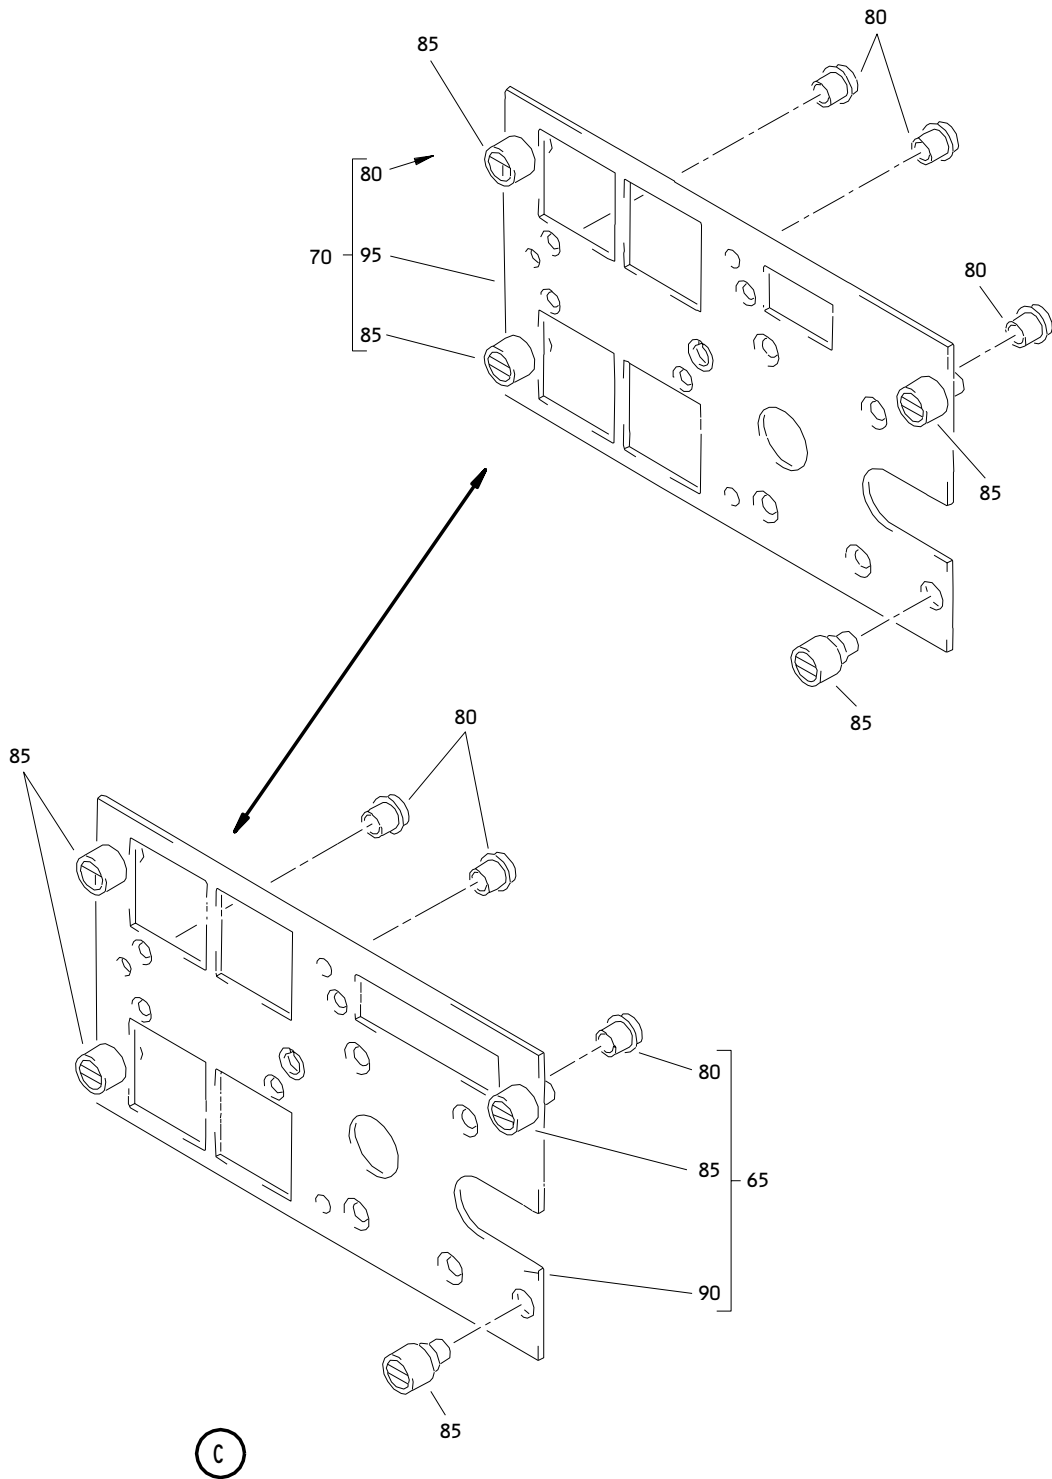

M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
Figure 3 (Sheet 3)

26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1083
Jul 01/03

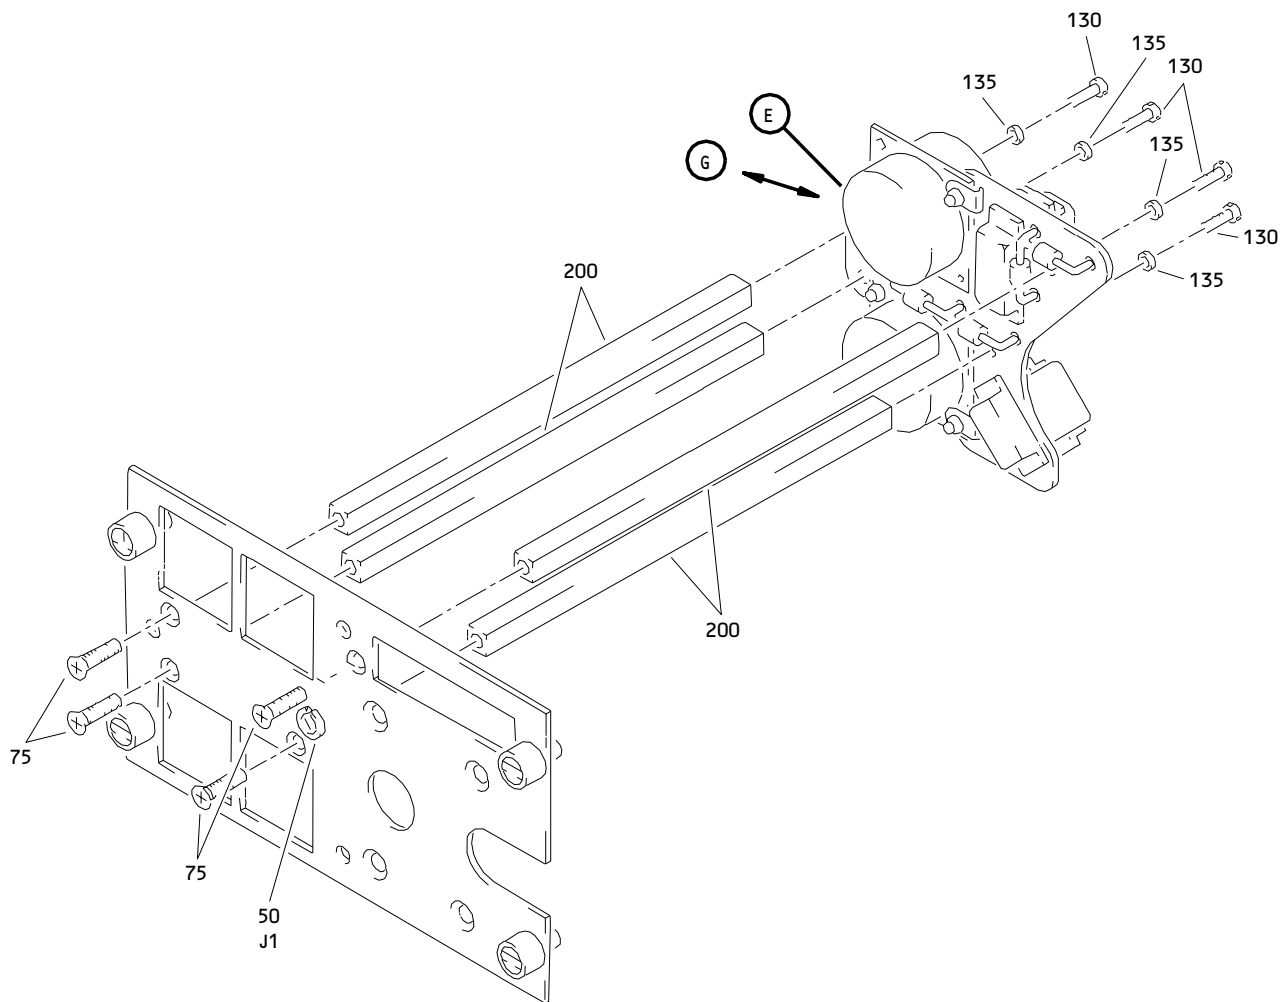


(D)

M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
Figure 3 (Sheet 4)

26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1084
Jul 01/03

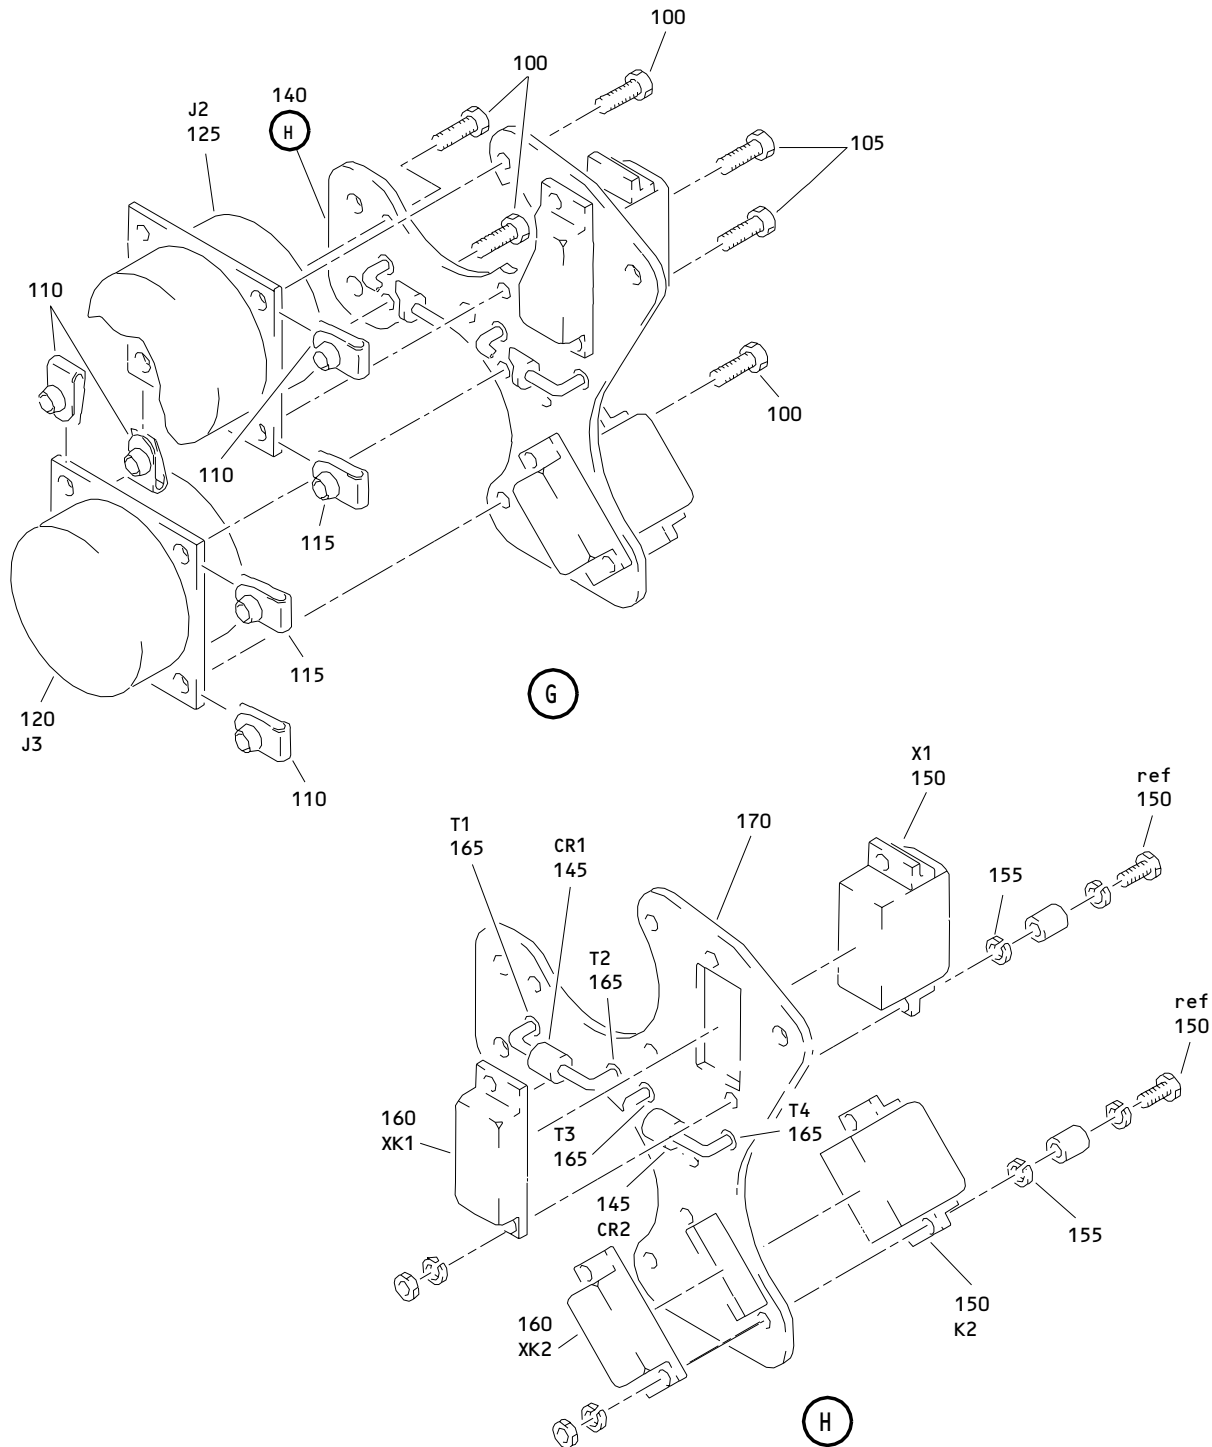

M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
 Figure 3 (Sheet 6)

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1084B
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
-1A	233T6100-9		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	BT	RF
-1B	233T6100-15		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	BU	RF
-1C	233T6100-19		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	BV	RF
-1D	233T6100-21		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	BW	RF
-1E	233T6100-27		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	BX	RF
-1F	233T6100-39		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	BY	RF
-1G	233T6100-42		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	BZ	RF
-1H	233T6100-43		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CA	RF
-1J	233T6100-53		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CB	RF
-1K	233T6100-56		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CC	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
03- -1L	233N6203-1347		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FG	RF
-1M	233N6203-1348		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FH	RF
-1N	233N6203-1349		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FJ	RF
-1P	233N6203-1354		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FP	RF
-1Q	233N6203-1356		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FQ	RF
-1R	233N6203-1381		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FT	RF
-1S	233N6203-1382		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FU	RF
-1T	233N6203-1383		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FV	RF
-1U	233N6203-1400		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GB	RF
-1V	233N6203-1401		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GC	RF
-1W	233N6203-1402		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GD	RF
-1X	233N6203-1407		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GJ	RF
-1Y	233N6203-1409		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GK	RF
-1Z	233N6203-1414		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GP	RF
-2	233N6203-1415		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GQ	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1084D
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
03- -2A	233N6203-1416		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GR	RF
5	S233T100-5501		.LIGHTPLATE- (V51896) (SPEC S233T100-5501) (OPT (V05617), (V98140))	BT-BX BZ-CC FG-FH FP,FQ FT-FV GB-GD GK, GP-GR	1
-5A	S233T100-5501		.LIGHTPLATE- (V51896) (SPEC S233T100-5501) (OPT (V05617), (V98140)) (LIMITED)	BY	1
-5B	S233T100-567		.LIGHTPLATE- (LIMITED)	BY	1
10	233N6203-7		.PANEL ASSY	BT	1
-10A	233N6203-12		.PANEL ASSY	BU	1
-10B	233N6203-13		.PANEL ASSY	BV	1
-10C	233N6203-21		.PANEL ASSY	BW	1
-10D	233N6203-24		.PANEL ASSY (LIMITED)	BX	1
-10E	233N6203-48		.PANEL ASSY (LIMITED)	BY	1
-10F	233N6203-53		.PANEL ASSY (LIMITED)	BZ	1
-10G	233N6203-56		.PANEL ASSY (LIMITED)	CA	1
-10H	233N6203-79		.PANEL ASSY (LIMITED)	CB	1
-10J	233N6203-82		.PANEL ASSY (LIMITED)	CC	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
03- -10K	233N6203-190		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	BY	1
-10L	233N6203-93		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	BY	1
-10M	233N6203-212		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	BY	1
-10N	233N6203-191		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	BZ	1
-10P	233N6203-94		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	BZ	1
-10Q	233N6203-213		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	BZ	1
-10R	233N6203-92		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CA	1
-10S	233N6203-95		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CA	1
-10T	233N6203-160		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CA	1
-10U	233N6203-205		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CA	1
-10V	233N6203-214		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CA	1
-10W	233N6203-198		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CB	1
-10X	233N6203-200		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CC	1
-10Y	233N6203-1048		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FG	1
-10Z	233N6203-1053		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FH	1
-11	233N6203-1056		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FJ	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1084F
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
03-					
-11A	233N6203-1079		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FP	1
-11B	233N6203-1082		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FQ	1
-11C	233N6203-1093		.PANEL ASSY (REF CMM 26-15-52)	FT	1
-11D	233N6203-1094		.PANEL ASSY (REF CMM 26-15-52)	FU	1
-11E	233N6203-1095		.PANEL ASSY (REF CMM 26-15-52)	FV	1
-11F	233N6203-1190		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GB	1
-11G	233N6203-1191		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GC	1
-11H	233N6203-1192		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GD	1
-11J	233N6203-1198		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GJ	1
-11K	233N6203-1200		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GK	1
-11L	233N6203-1212		.PANEL ASSY (REF CMM 26-15-52)	GP	1
-11M	233N6203-1213		.PANEL ASSY (REF CMM 26-15-52)	GQ	1
-11N	233N6203-1214		.PANEL ASSY (REF CMM 26-15-52)	GR	1
R 15	851-30768-2061		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-2061)	BT-BX	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03-15A	851-30768-3061		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-3061) (OPT ITEM 15B)	BY-CC	1
R -15B	BCREF7750		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1001-1061) (S1) (SPEC S231T290-1061) (OPT ITEM 15A)	BY-CC	1
R 20	851-30768-2062		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-2062)	BT-BX	1
R -20A	851-30768-3062		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-3062) (OPT ITEM 20B)	BY-CC	1
R -20B	BCREF7751		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (433-673-1001-1062) (S2) (SPEC S231T290-1062) (OPT ITEM 20A)	BY-CC	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1084H
 Mar 01/04

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED

 **BOEING**
COMPONENT
MAINTENANCE MANUAL

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03-25	851-30768-2060		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-2060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 851-30768-3060 S231T290-4060 OR -5060 TOGETHER WITH 433-100-005 IN S3 POSITION)	BT-BX	2

26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1084I
Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03-25A	851-30768-3060		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3, S4) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCRE7749 851-30768-3060 BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCRE7749 851-30768-3060 S231T290-4060 OR -5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 25B)	BY-CC	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03- -25B	BCREF7749		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V81590) (433-673-1001-1060) (S3, S4) (SPEC S231T290-1060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (OPT ITEM 25A)	BY-CC	2
R 30	851-30768-814		..GUARD-SWITCH (V96182) (SPEC S231T290-814) (OPT ITEM 30A)	BT-BX	1
R -30A	851-30768-804		..GUARD-SWITCH (V96182) (SPEC S231T290-804) (OPT ITEM 30)	BT-BX	1
R -30B	851-30768-814		..GUARD-SWITCH (V96182) (SPEC S231T290-814) (OPT ITEM 30A)	BW	1
R -30C	433-100-005		..GUARD-SWITCH (V81590) (SPEC S231T290-824)	BY-CC	1
R 35	851-30768-814		..GUARD-SWITCH (V96182) (SPEC S231T290-814) (OPT ITEM 35A)	BT-BV	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03-35A	851-30768-804		..GUARD-SWITCH (V96182) (SPEC S231T290-804) (OPT ITEM 35)	BT-BV	1
R -35B	851-30768-811		..GUARD-SWITCH (V96182) (SPEC S231T290-811)	BW	1
R -35C	433-100-002		..GUARD-SWITCH (V81590) (SPEC S231T290-821)	BY-CC	1
R -35D	851-30768-811		..GUARD-SWITCH (V96182) (SPEC S231T290-811) (OPT ITEM 35E)	BX	1
R -35E	851-30768-801		..GUARD-SWITCH (V96182) (SPEC S231T290-801) (OPT ITEM 35D)	BX	1
R 40	BCREF6139		..LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1015) (L1) (SPEC S231T300-1015)	BT,BV ,BX-C C	1
R -40A	BCREF6751		..LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1228) (L1) (SPEC S231T300-1228)	BU,BW	1
R 45	BCREF6752		..LIGHT ASSY-APU BTL 2 DISCH IND (V81590) (434-674-1005-1229) (L2) (SPEC S231T300-1229)	BU,BW	1
R 50	800-000121-1		..CONNECTOR-PWR (V05617) (J1)	BT-CC	1
R 55	NAS514P832-7		..SCREW	BT-CC	4
R 60	D455-07-001		..SWITCH ASSY- (VK0673) (S39) (SPEC 10-61318-16)	BT,BV ,BX-C C	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1084L
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03-60A	D455-08-001		..SWITCH- (VK0673) (S39) (SPEC 10-61318-17)	BU,BW	1
R 65	233N6203-2		..BASEPLATE ASSY	BT,BV ,BX-C C	1
R -65A 70	233N6203-11 233N6203-11		..BASEPLATE ASSY DELETED	BU,BW	1
R 75	NAS514P632-5		ATTACHING PARTS ..SCREW -----*-----	BT-CC	4
R 80	SF6G6CBB5D		...NUT- (V12324) (SPEC BACN10PA06-6)	BT-CC	3
R 85	DBMB1400-6A1		...STUD ASSY- (V08524) (SPEC BACS21DD1B)	BU,BW	4
R -85A	PFSC35-38ASEMB		...STUD- (V72794) (SPEC BACS21DX1B)	BT,BV ,BX-C C	4
R 90	233N6203-3		...BASEPLATE	BT,BV ,BX-C C	1
R -90A 95	BACP10U0337N BACP10U0337N		...BASEPLATE DELETED	BU,BW	1
R 100	NAS1801-04-5		..SCREW	BT-CC	4
R 105	NAS1801-04-5		..SCREW	BT,BV ,BY,B Z,CB	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03-110	K19798-04		..NUT- (V15653) (SPEC BACN10NW1) (OPT RMA4812-160-40 (V72962)) (OPT 293162 (V60119))	BT-CC	4
R 115	K19798-04		..NUT- (V15653) (SPEC BACN10NW1) (OPT RMA4812-160-40 (V72962)) (OPT 293162 (V60119))	BT,BV ,BY,B Z,CB	2
R 120	BACC45FN18-31P7		..CONNECTOR- (J3)	BT-CC	1
R 125	BACC45FN18-31P6		..CONNECTOR- (J2)	BT-CC	1
R 130	NAS1801-06-5		..SCREW	BT-CC	4
R 135	MS35338-41		..WASHER	BT-CC	4
R 140	233N6203-6		..BRACKET ASSY-SPRT	BT-BV ,BY,B Z,CB	1
R 145	JANTX1N5061		...DIODE- (CR1, CR2) (OPT ITEM 145A)	BT-BV ,BY,B Z,CB	2
R -145A	JANTX1N5618		...DIODE- (CR1, CR2) (OPT ITEM 145)	BT-BV ,BY,B Z,CB	2
R 150	3SAV1338A2		...RELAY- (V01526) (SPEC BACR13CD2) (OPT BR16S233 (V09026)) (OPT EE4AA005 (V35344)) (OPT HFW1206K03 (V58614)) (OPT HFW1204K01 (V71482)) (K1, K2)	BT-BV ,BY,B Z,CB	2

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1084N
 Jul 01/03


FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03-155	MS35338-40		...WASHER	BT-BV ,BY,B Z,CB	AR
R 160	451120-026		...SOCKET- (V03743) (XK1, XK2)	BT-BV ,BY,B Z,CB	2
R 165	4443B9		...TERMINAL- (V88245) (T1-T4)	BT-BV ,BY,B Z,CB	4
R 170	233N3250-27		...BRACKET	BT-BV ,BY,B Z,CB	1
R 175	JANTX1N5618		..DIODE- (CR1-CR4)	BW,BX ,CA,C C	4
R 180	3SAV1338A2		..RELAY- (V01526) (SPEC BACR13CD2) (OPT BR16S233 (V09026)) (OPT EE4AA005 (V35344)) (OPT HFW1206K03 (V58614)) (OPT HFW1204K01 (V71482)) (K1, K2)	BW,BX ,CA,C C	2
R 185	451120-026		..SOCKET- (V03743) (XK1, XK2)	BW,BX ,CA,C C	2
R 190	4443B9		..TERMINAL- (V88245) (T1-T6)	BW,BX ,CA,C C	6

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 03-195	233T6200-99		..BRACKET-SPRT	BW,BX ,CA,C C	1
R 200	69B46200-15		..STANDOFF	BT-CC	4
R -205	233N6203-8		..WIRE BUNDLE ASSY	BT,BY	1
R -205A	233N6203-10		..WIRE BUNDLE ASSY	BU	1
R -205B	233N6203-14		..WIRE BUNDLE ASSY	BV,BZ	1
R -205C	233N6203-22		..WIRE BUNDLE ASSY	BW	1
R -205D	233N6203-25		..WIRE BUNDLE ASSY	BX,CA	1
R -205E	233N6203-50		..WIRE BUNDLE ASSY	CB	1
R -205F	233N6203-58		..WIRE BUNDLE ASSY	CC	1
R -210	M39029-1-16-20		...CONTACT-PIN (V95266)	BX,CA	AR

- Item Not Illustrated


26-15-51

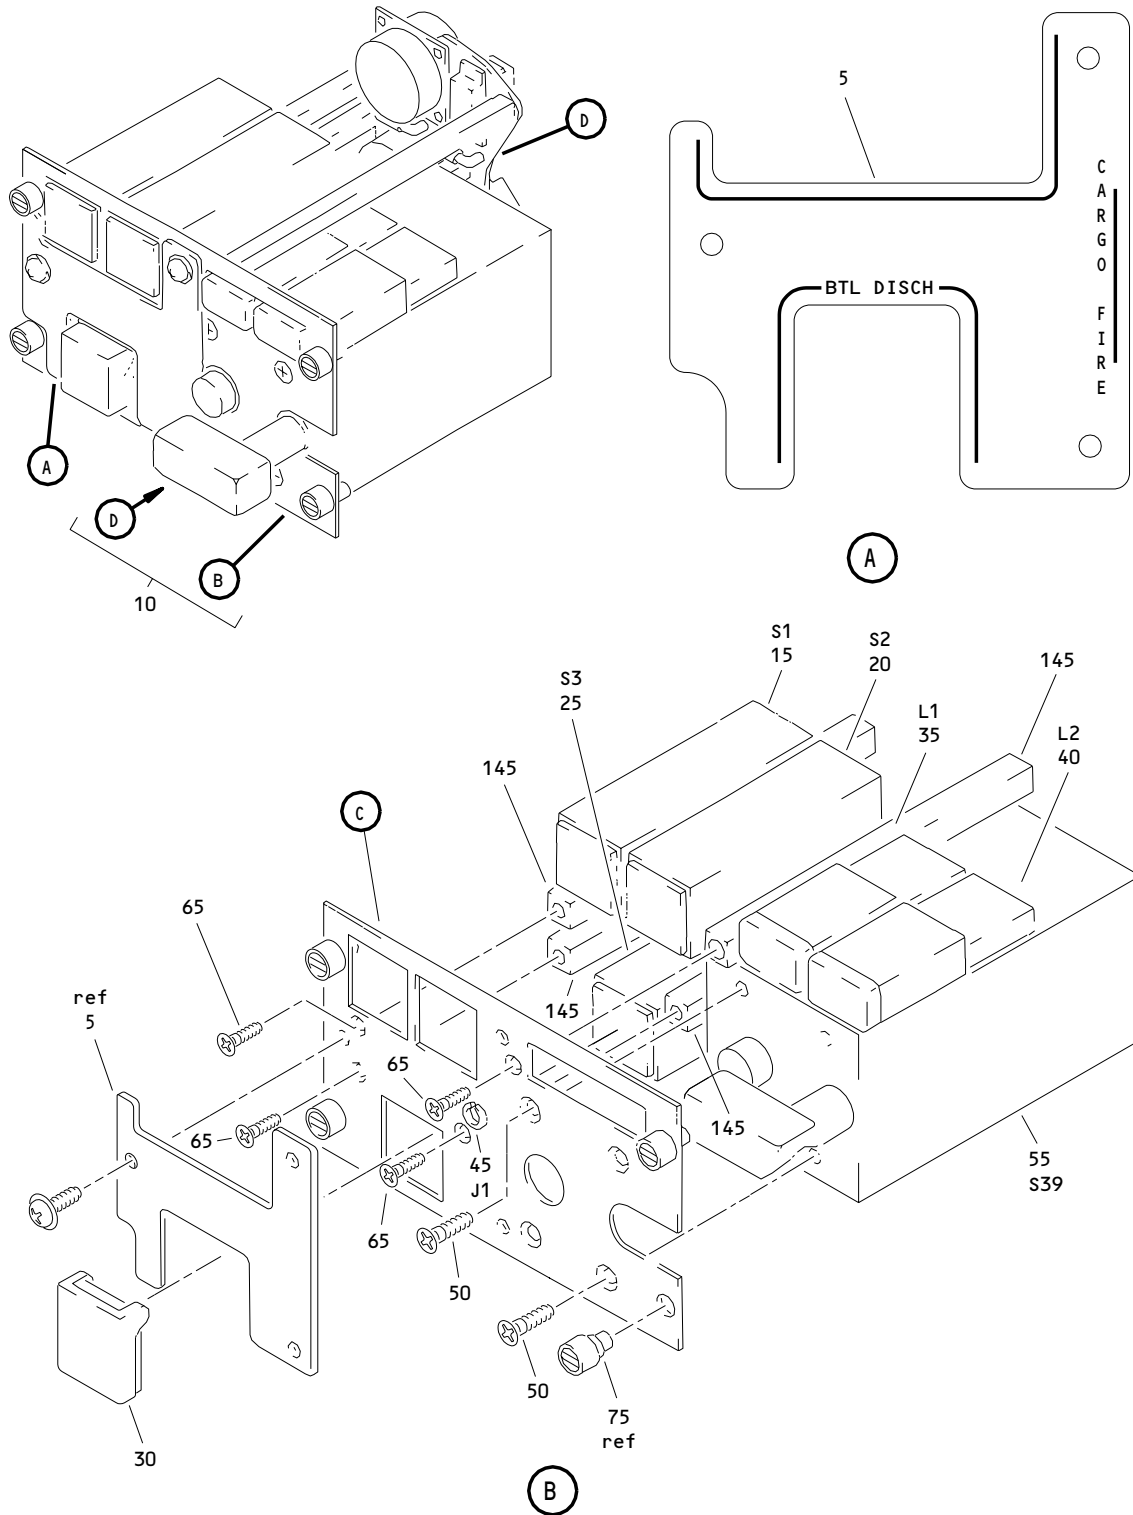

M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
 Figure 4 (Sheet 1)

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1084Q
 Jul 01/03

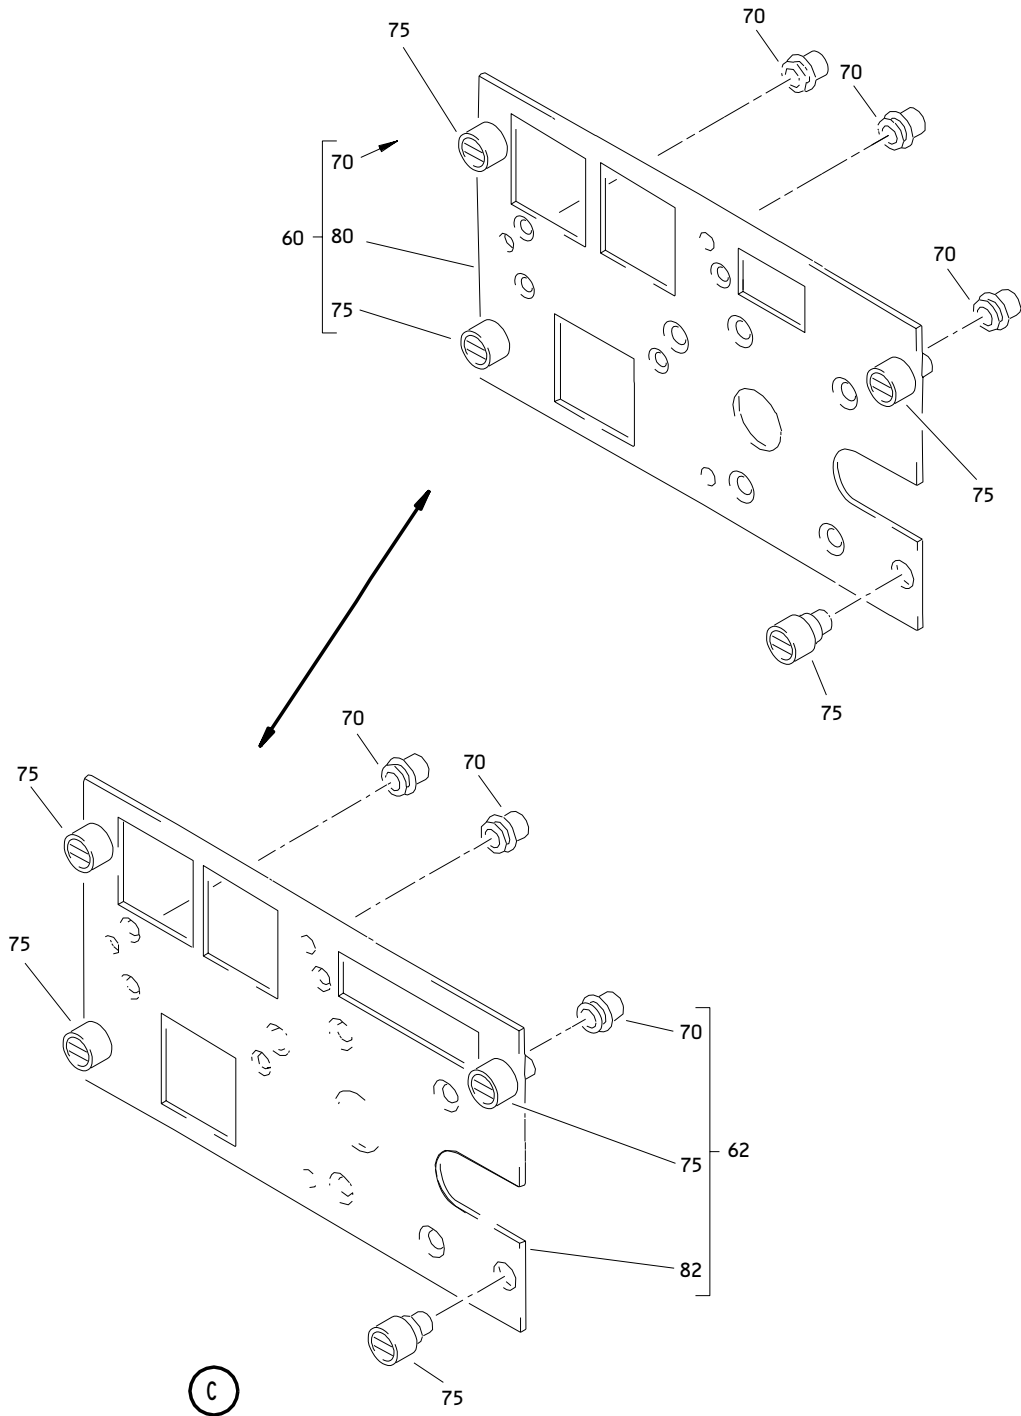


M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
 Figure 4 (Sheet 2)

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1084R
 Jul 01/03

233N6100
DASH NUMBER LIMITED
233N6203
DASH NUMBERS LIMITED

BOEING
COMPONENT
MAINTENANCE MANUAL

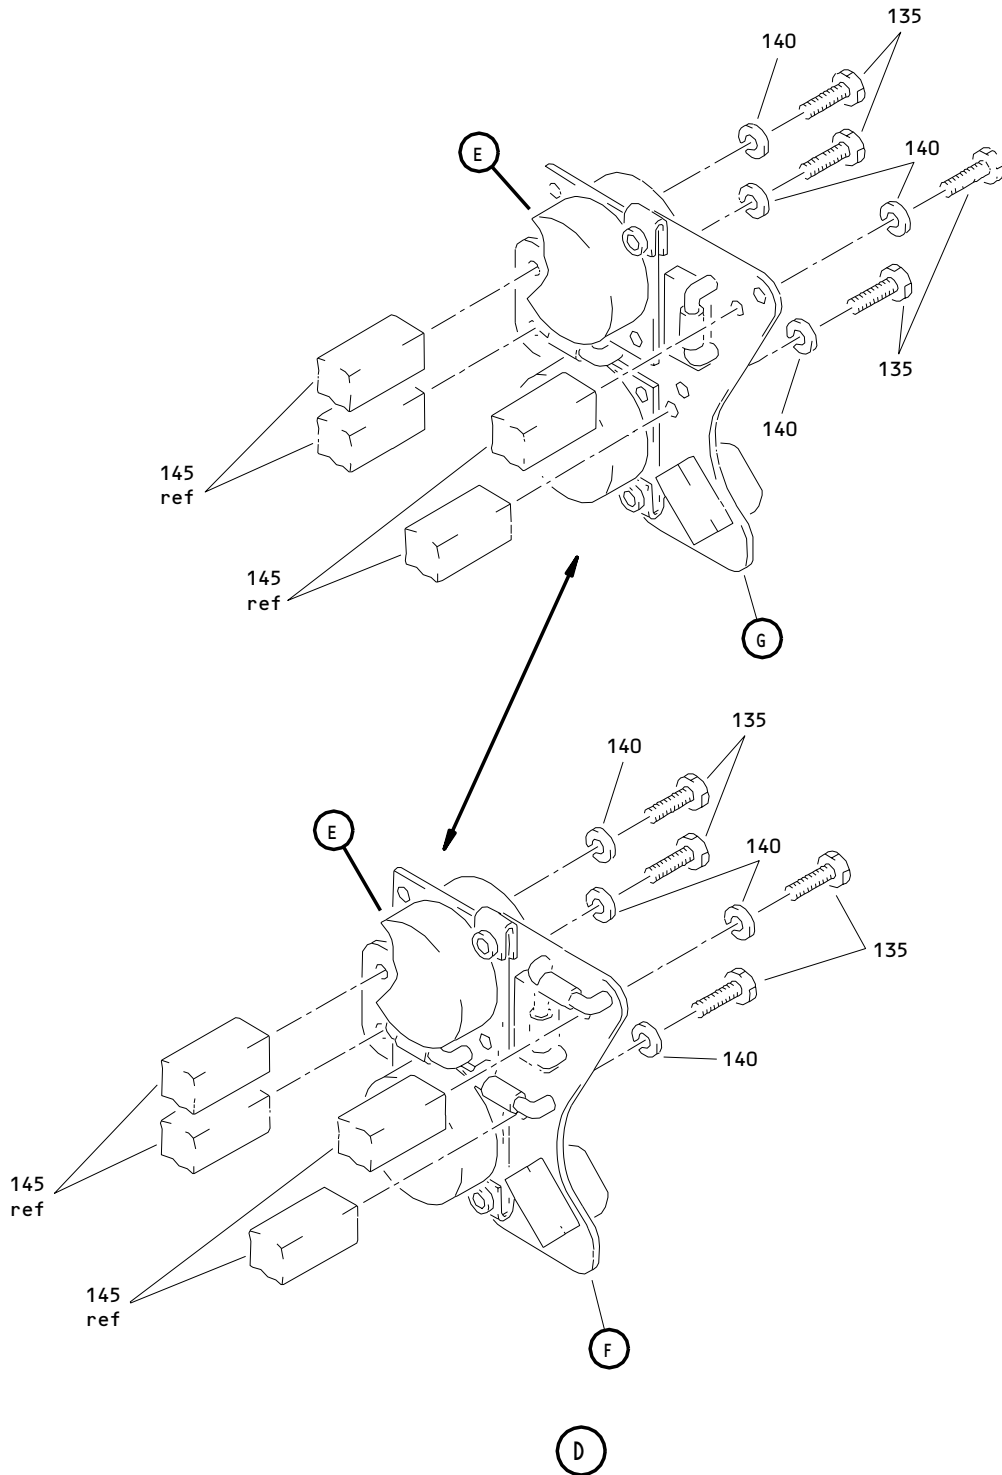


M1044 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
Figure 4 (Sheet 3)


26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1084S
Jul 01/03


H90929

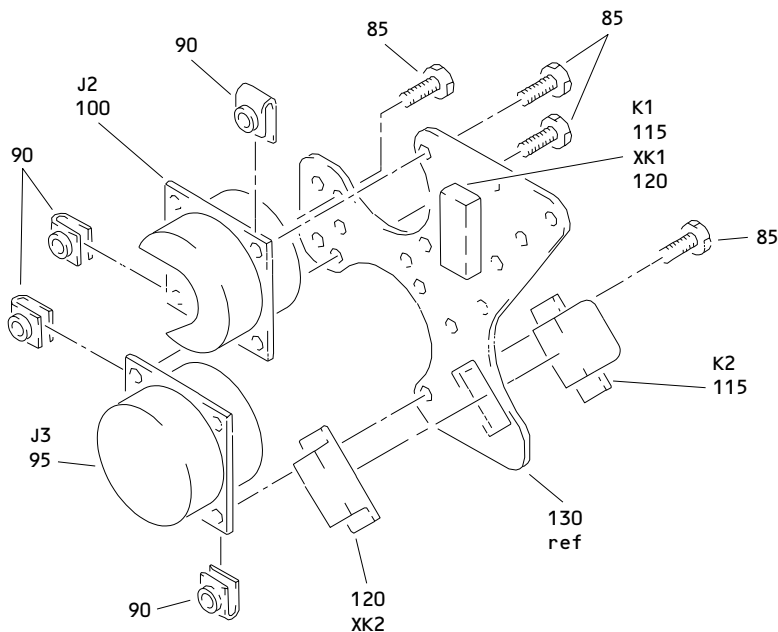

(E)

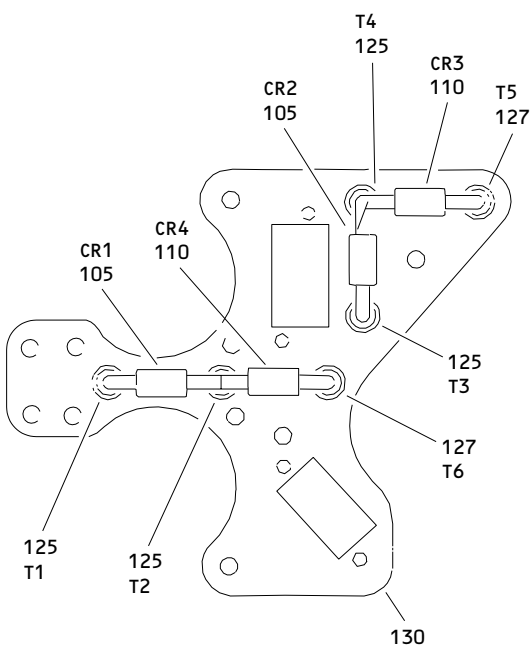

(F)

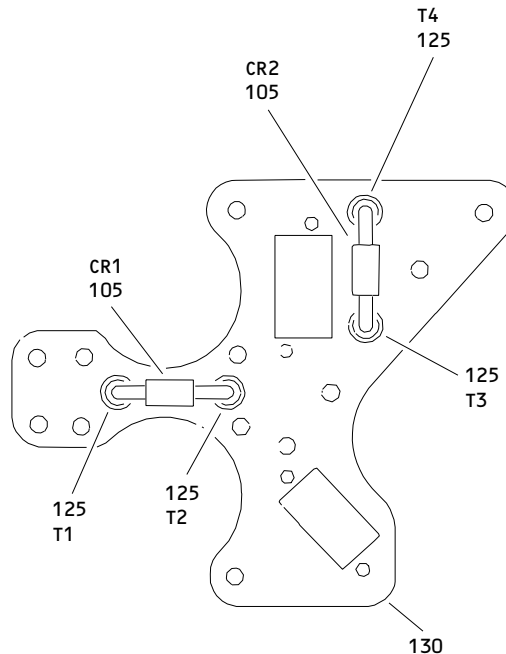

(G)

M10444 Auxiliary Power Unit and Cargo Fire Control Panel Assembly
 Figure 4 (Sheet 4)

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1084T
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
04- -1A	233T6100-36		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CD	RF
-1B	233T6100-47		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CE	RF
-1C	233T6100-49		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CF	RF
-1D	233T6100-50		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CG	RF
-1E	233T6100-51		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CH	RF
-1F	233T6100-59		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CJ	RF
-1G	233T6100-60		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (PRE SB 233N6203-26-10)	CK	RF
-1H	233N6203-1350		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FK	RF
-1J	233N6203-1351		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FL	RF
-1K	233N6203-1352		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FM	RF
-1L	233N6203-1353		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FN	RF

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
04- -1M	233N6203-1358		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FR	RF
-1N	233N6203-1359		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FS	RF
-1P	233N6203-1384		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FW	RF
-1Q	233N6203-1385		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FX	RF
-1R	233N6203-1386		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FY	RF
-1S	233N6203-1389		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	FZ	RF
-1T	233N6203-1398		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GA	RF
-1U	233N6203-1403		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GE	RF
-1V	233N6203-1404		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GF	RF
-1W	233N6203-1405		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GG	RF
-1X	233N6203-1406		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GH	RF
-1Y	233N6203-1411		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GL	RF

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1084V
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
04- -1Z	233N6203-1412		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GM	RF
-2	233N6203-1413		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GN	RF
-2A	233N6203-1417		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GS	RF
-2B	233N6203-1418		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GT	RF
-2C	233N6203-1419		PANEL ASSY-M10444 APU AND CARGO FIRE CONT (POST SB 233N6203-26-10)	GU	RF
5	S233T100-567		.LIGHTPLATE- (V51896) (SPEC S233T100-567) (OPT (V05617), (V98140))	CD-CK FK-FN FR,FS FW-GA GE-GH GL-GN GS-GU	1
10	233N6203-36		.PANEL ASSY	CD	1
-10A	233N6203-67		.PANEL ASSY (LIMITED)	CE	1
-10B	233N6203-70		.PANEL ASSY (LIMITED)	CF	1
-10C	233N6203-73		.PANEL ASSY (LIMITED)	CG	1
-10D	233N6203-75		.PANEL ASSY (LIMITED)	CH	1
-10E	233N6203-85		.PANEL ASSY (LIMITED)	CJ	1
-10F	233N6203-86		.PANEL ASSY (LIMITED)	CK	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
04- -10G	233N6203-193		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CE	1
-10H	233N6203-96		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CE	1
-10J	233N6203-215		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CE	1
-10K	233N6203-195		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CF	1
-10L	233N6203-196		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CG	1
-10M	233N6203-197		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CE	1
-10N	233N6203-98		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CE	1
-10P	233N6203-217		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CE	1
-10Q	233N6203-202		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CF	1
-10R	233N6203-143		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CG	1
-10S	233N6203-186		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CG	1

26-15-51

ILLUSTRATED PARTS LIST
01.1 Page 1084X
Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
04- -10T	233N6203-203		.PANEL ASSY (LIMITED) (FOR DETAILS SEE FIG. 1)	CK	1
-10U	233N6203-226		.PANEL ASSY (LIMITED) (REF CMM 26-15-52)	CK	1
-10V	233N6203-1067		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FK	1
-10W	233N6203-1070		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FL	1
-10X	233N6203-1073		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FM	1
-10Y	233N6203-1075		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FN	1
-10Z	233N6203-1085		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FR	1
-11	233N6203-1086		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FS	1
-11A	233N6203-1096		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	FW	1
-11B	233N6203-1098		.PANEL ASSY (REF CMM 26-15-52)	FX	1
-11C	233N6203-1143		.PANEL ASSY (REF CMM 26-15-55)	FY	1
-11D	233N6203-1160		.PANEL ASSY (REF CMM 26-15-52)	FZ	1
-11E	233N6203-1186		.PANEL ASSY (REF CMM 26-15-55)	GA	1
-11F	233N6203-1193		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GE	1
-11G	233N6203-1195		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GF	1
-11H	233N6203-1196		.PANEL ASSY (REF CMM 26-15-52)	GG	1
-11J	233N6203-1197		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GH	1
-11K	233N6203-1202		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GL	1
-11L	233N6203-1203		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GM	1

26-15-51

ILLUSTRATED PARTS LIST
01.1 Page 1084Y
Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
04-					
-11M	233N6203-1205		.PANEL ASSY (REF CMM 26-15-52)	GN	1
-11N	233N6203-1215		.PANEL ASSY (REF CMM 26-15-52)	GS	1
-11P	233N6203-1217		.PANEL ASSY (REF CMM 26-15-52)	GT	1
-11Q	233N6203-1226		.PANEL ASSY (FOR DETAILS SEE FIG. 1)	GU	1
R 15	851-30768-2061		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-2061)	CD	1
R -15A	851-30768-3061		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V96182) (S1) (SPEC S231T290-3061) (OPT ITEM 15B)	CE-CK	1
R -15B	BCREF7750		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/FWD) (V81590) (433-673-1001-1061) (S1) (SPEC S231T290-1061) (OPT ITEM 15A)	CE-CK	1

26-15-51

 ILLUSTRATED PARTS LIST
 01.1 Page 1084Z
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 04-20	851-30768-2062		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-2062)	CD	1
R -20A	851-30768-3062		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V96182) (S2) (SPEC S231T290-3062) (OPT ITEM 20B)	CE-CK	1
R -20B	BCREF7751		..SWITCH-LIGHTED PUSH BUTTON IND (ARMED/AFT) (V81590) (433-673-1001-1062) (S2) (SPEC S231T290-1062) (OPT ITEM 20A)	CE-CK	1
R 25	851-30768-2060		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-2060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 851-30768-3060 BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 851-30768-3060 S231T290-4060 OR -5060 TOGETHER WITH 433-100-005 IN S3 POSITION)	CD	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 04- -25A	851-30768-3060		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V96182) (S3) (SPEC S231T290-3060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREFA0525 OR S231T290-5050 T/W 433-100-002 IN S4 POSITION 851-30768-2060 TOGETHER WITH 851-30768-804 -814 OR 433-100-005 SWITCHGUARD I/W BCREFA0525 851-30768-3060 S231T290-4060 OR -5060 TOGETHER WITH 433-100-005 IN S3 POSITION) (OPT ITEM 25B)	CE-CK	1

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1086
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 04- -25B	BCREF7749		..SWITCH-LIGHTED PUSH BUTTON IND (DISCH) (V81590) (433-673-1001-1060) (S3) (SPEC S231T290-1060) (851-30768-2060 TOGETHER WITH 851-30768-801 OR -811 OR 433-100-002 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-002 SWITCHGUARD IN S4 POSITION. 851-30768-2060 TOGETHER WITH 851-30768-804 OR -814 OR 433-100-005 SWITCHGUARD I/W BCREF7749 OR 851-30768-3060 TOGETHER WITH 433-100-005 SWITCHGUARD IN S3 POSITION) (OPT ITEM 25A)	CE-CK	1
R 30	851-30768-811		..GUARD-SWITCH (V96182) (SPEC S231T290-811) (OPT ITEM 30A)	CD	1
R -30A	851-30768-801		..GUARD-SWITCH (V96182) (SPEC S231T290-801) (OPT ITEM 30)	CD	1
R -30B	433-100-002		..GUARD-SWITCH (V81590) (SPEC S231T290-821)	CE-CK	1
R 35	BCREF6139		..LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1015) (L1) (SPEC S231T300-1015)	CD-CF ,CJ	1

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 04-35A	BCREF6751		..LIGHT ASSY-APU BTL 1 DISCH IND (V81590) (434-674-1005-1228) (L1) (SPEC S231T300-1228)	CG,CH ,CK	1
R 40	BCREF6752		..LIGHT ASSY-APU BTL 2 DISCH IND (V81590) (434-674-1005-1229) (L2) (SPEC S231T300-1229)	CG,CH ,CK	1
R 45	800-000121-1		..CONNECTOR-PWR (V05617) (J1)	CD-CK	1
R 50	NAS514P832-7		..SCREW	CD-CK	4
R 55	D455-07-001		..SWITCH ASSY- (VK0673) (S39) (SPEC 10-61318-16)	CD-CF ,CJ	1
R -55A	D455-08-001		..SWITCH- (VK0673) (S39) (SPEC 10-61318-17)	CG,CH ,CK	1
R 60	233N6203-37		..BASEPLATE ASSY	CD-CF ,CJ	1
R 62	233N6203-42		..BASEPLATE ASSY	CG,CH ,CK	1
R 65	NAS514P632-5		ATTACHING PARTS ..SCREW -----*-----	CD-CK	4

26-15-51

 ILLUSTRATED PARTS LIST
 01.101 Page 1086B
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 04-70	SF6G6CBB5D		...NUT- (V12324) (SPEC BACN10PA06-6)	CD-CK	3
R 75	DBMB1400-6A1		...STUD ASSY- (V08524) (SPEC BACS21DD1B)	CG,CH ,CK	4
R -75A	PFSC35-38ASEMB		...STUD- (V72794) (SPEC BACS21DX1B)	CD-CF ,CJ	4
R 80	233N6203-40		...BASEPLATE	CD-CF ,CJ	1
R 82	233N6203-44		...BASEPLATE	CG,CH ,CK	1
R 85	NAS1801-04-5		..SCREW	CD-CK	4
R 90	K19798-04		..NUT- (V15653) (SPEC BACN10NW1) (OPT RMA4812-160-40 (V72962)) (OPT 293162 (V60119))	CD-CK	4
R 95	BACC45FN18-31P7		..CONNECTOR- (J3)	CD-CK	1
R 100	BACC45FN18-31P6		..CONNECTOR- (J2)	CD-CK	1
R 105	JANTX1N56918		..DIODE- (CR1, CR2)	CD-CK	2
R 110	JANTX1N56918		..DIODE- (CR3, CR4)	CE-CK	2
R 115	3SAV1338A2		..RELAY- (V01526) (SPEC BACR13CD2) (OPT BR16S233 (V09026)) (OPT EE4AA005 (V35344)) (OPT HFW1206K03 (V58614)) (OPT HFW1204K01 (V71482)) (K1, K2)	CD-CK	2

26-15-51

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE 1234567	EFF CODE	QTY PER ASSY
R 04-120	451120-026		.. SOCKET- (V03743) (XK1, XK2)	CD-CK	2
R 125	4443B9		.. TERMINAL- (V88245) (T1-T4)	CD-CK	4
R 127	4443B9		.. TERMINAL- (V88245) (T5, T6)	CE-CK	2
R 130	233T6200-99		.. BRACKET-SPRT	CD-CK	1
R 135	NAS1801-06-5		.. SCREW	CD-CK	4
R 140	MS35338-41		.. WASHER	CD-CK	4
R 145	69B46200-15		.. STANDOFF	CD-CK	4
R -150	233N6203-38		.. WIRE BUNDLE ASSY	CD	1
R -150A	233N6203-68		.. WIRE BUNDLE ASSY	CE	1
R -150B	233N6203-72		.. WIRE BUNDLE ASSY	CF, CJ	1
R -150C	233N6203-74		.. WIRE BUNDLE ASSY	CG, CK	1
R -150D	233N6203-76		.. WIRE BUNDLE ASSY	CH	1
R -155	M39029-1-16-20		... CONTACT-PIN (V95266)	CD	AR

- Item Not Illustrated

26-15-51

ILLUSTRATED PARTS LIST
01.101 Page 1086D
Jul 01/03

233N6100
 DASH NUMBER LIMITED
 233N6203
 DASH NUMBERS LIMITED

 **BOEING**
 COMPONENT
 MAINTENANCE MANUAL

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
			1234567		
05-					
-1	851-30768-2062		DELETED		
5	MS24515-685AS15		DELETED		
10	MS25237-387		DELETED		
15	851-30768-562		DELETED		
20	851-30768-702		DELETED		
25	851-30768-823		DELETED		

- Item Not Illustrated

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1086E
 Jul 01/03

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
			1234567		
06-					
-1	851-30768-2061		DELETED		
5	MS24515-685AS15		DELETED		
10	MS25237-387		DELETED		
15	851-30768-561		DELETED		
20	851-30768-702		DELETED		
25	851-30768-823		DELETED		

- Item Not Illustrated

26-15-51

233N6100
 DASH NUMBER LIMITED
 233N6203
 DASH NUMBERS LIMITED

 **BOEING**
 COMPONENT
 MAINTENANCE MANUAL

FIG. & ITEM	PART NO.	AIRLINE PART NUMBER	NOMENCLATURE	EFF CODE	QTY PER ASSY
			1234567		
07-					
-1	851-30768-2060		DELETED		
3	851-30768-829		DELETED		
5	MS25237-387		DELETED		
10	851-30768-560		DELETED		
15	851-30768-709		DELETED		
20	851-30768-823		DELETED		

- Item Not Illustrated

26-15-51

ILLUSTRATED PARTS LIST
 01.101 Page 1086G
 Jul 01/03