


**CBRHD SERIES**  
**HIGH DENSITY**  
**0.5 AMP DUAL IN LINE**  
**BRIDGE RECTIFIER**

# Central<sup>TM</sup>

**Semiconductor Corp.**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CBRHD series types are silicon full wave bridge rectifiers mounted in a durable epoxy surface mount molded case, utilizing glass passivated chips.

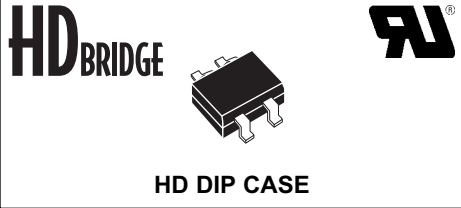

**MARKING CODES:**

**CBRHD-02: CBD2      CBRHD-04: CBD4**  
**CBRHD-06: CBD6      CBRHD-10: CBD10**

- This series is UL listed: file number E130224

**FEATURES:**

- Efficient use of board space: requires only 42mm<sup>2</sup> of board space vs. 120mm<sup>2</sup> of board space needed for industry standard 1.0 Amp surface mount bridge rectifier.
- 50% higher density (Amps/mm<sup>2</sup>) than the industry standard 1.0 Amp surface mount bridge rectifier.
- Glass passivated chips for high reliability.

**MAXIMUM RATINGS:** (T<sub>A</sub>=25°C unless otherwise noted)

	SYMBOL	CBRHD				UNITS
		-02	-04	-06	-10 *	
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	200	400	600	1000	V
DC Blocking Voltage	V <sub>R</sub>	200	400	600	1000	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	140	280	420	700	V
Average Forward Current (T <sub>A</sub> =40°C) (Note 1)	I <sub>O</sub>			0.5		A
Average Forward Current (T <sub>A</sub> =40°C) (Note 2)	I <sub>O</sub>			0.8		A
Peak Forward Surge Current	I <sub>FSM</sub>			30		A
Operating & Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>		-65 to +150			°C


**ELECTRICAL CHARACTERISTICS PER DIODE:** (T<sub>A</sub>=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
V <sub>F</sub>	I <sub>F</sub> =400mA		1.0	V
I <sub>R</sub>	V <sub>R</sub> =Rated V <sub>RRM</sub>		5.0	μA
I <sub>R</sub>	V <sub>R</sub> =Rated V <sub>RRM</sub> , T <sub>A</sub> =125°C		500	μA
C <sub>J</sub>	V <sub>R</sub> =4.0V, f=1.0MHz	20		pF

Notes: (1) Mounted on Glass-Epoxy PCB.  
(2) Mounted on Ceramic PCB.

\* Available on special order, please consult factory.

HD DIP CASE - MECHANICAL OUTLINE

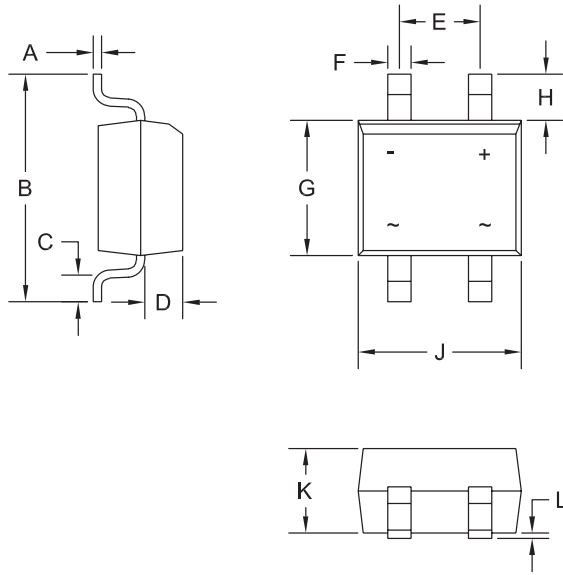

R2

**MARKING CODES:**  
CBRHD-02: CBD2  
CBRHD-04: CBD4  
CBRHD-06: CBD6  
CBRHD-10: CBD10

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.006	0.014	0.15	0.35
B	-	0.275	-	7.00
C	0.027	0.043	0.70	1.10
D	0.035	0.051	0.90	1.30
E	0.090	0.106	2.30	2.70
F	0.019	0.031	0.50	0.80
G	0.150	0.165	3.80	4.20
H	0.051	0.067	1.30	1.70
J	0.177	0.193	4.50	4.90
K	0.090	0.106	2.30	2.70
L	0.000	0.008	0.00	0.20

HD DIP (REV: R2)