

EZM0118NC Zero Bias Schottky Detector

N-BNC Interface Negative Output Polarity

0.01 to 18.5 GHz




Technical Characteristics

Product Features

No Bias Required
Neg. (-) Polarity
Broadband Flat Frequency Response
Excellent VSWR

Max. Ratings

Storage Temperature:	-45° to +100°C
Operating Temperature:	-25° to +80°C
Maximum input power:	100mW CW

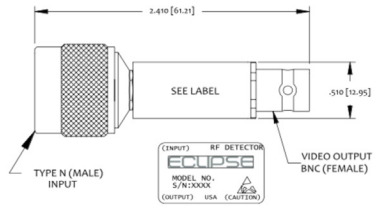

NOTES:

Specifications @ +25°C & -20dBm input power


Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Voltage Sensitivity	0.01 to 18.5		400		mV/mW open circuit
Voltage Sensitivity Stability over Temperature	0.01 to 18.5	2.5	3.0	3.5	dB
VSWR	0.01 to 18.5		1.50:1	1.60:1	
Flatness	0.01 to 18.5			0.50	dB
Polarity			Neg.(-)		
Video Capacitance		420	470	500	pF
Risetime & Faltime @ +10 dBm					
Dynamic Range	0.01 to 18.5	-30		+20	dBm
CW Power Handling				100	mW
Tss					
Operating Temperature		-25		+80	°C

NOTES:

- Standard polarity is negative. For positive polarity, add a 'P', ex. EZM0118PNC
- Typical values are measured at +25°C and are not guaranteed

Outline Drawing

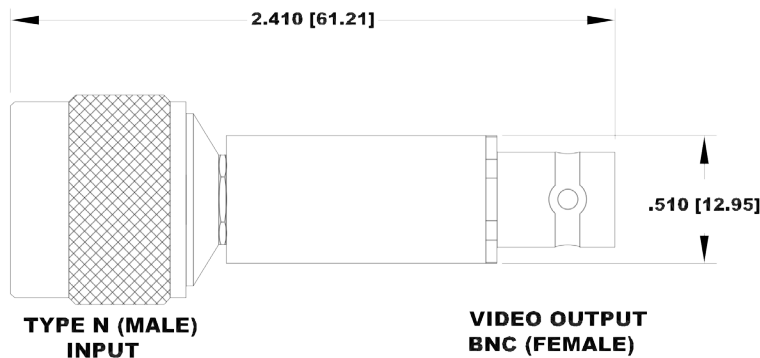

EZM0118NC Zero Bias Schottky Detector

N-BNC Interface Negative Output Polarity

0.01 to 18.5 GHz



EZM Transfer Curve

