

EZM2018NC Zero Bias Schottky Detector

N-BNC Interface Positive Output Polarity

2.0 to 18.0 GHz




Technical Characteristics

Product Features

No Bias Required
Neg. (-) Polarity
Broadband Flat Frequency Response
Excellent VSWR

Max. Ratings

Storage Temperature:	-45° to +100°C
Operating Temperature:	-25° to +80°C
Maximum input power:	100mW CW

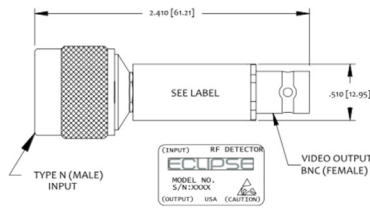

NOTES:

Specifications @ +25°C & -20dBm input power


Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Voltage Sensitivity	2.0 to 18.0	450	500	600	mV/mW open circuit
Voltage Sensitivity Stability over Temperature	2.0 to 18.0	2.5	3.0	3.5	dB
VSWR	2.0 to 18.0		1.50:1	1.60:1	
Flatness	2.0 to 18.0		+/-0.30	+/-0.40	dB
Polarity			Neg.(-)		
Video Capacitance			20		pF
Risetime & Faltime @ +10 dBm					
Dynamic Range	2.0 to 18.0	-30		+20	dBm
CW Power Handling				100	mW
Tss				2.0 to 18.0	
Operating Temperature		-25		+80	°C

NOTES:

- Standard polarity is negative. For positive polarity, add a 'P', ex. EZM2018PNC
- Typical values are measured at +25°C and are not guaranteed

Outline Drawing

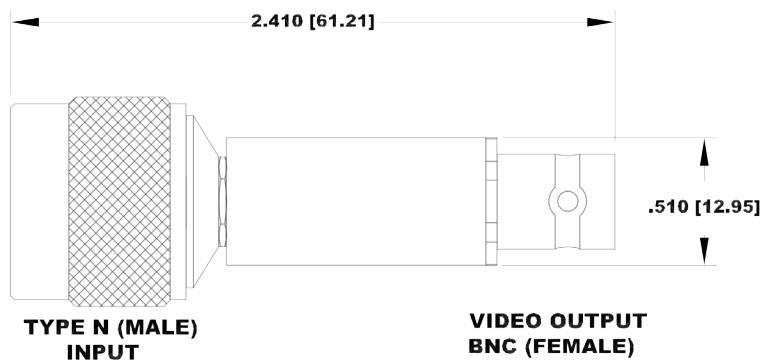

EZM2018NC Zero Bias Schottky Detector

N-BNC Interface Positive Output Polarity

2.0 to 18.0 GHz



EZM Transfer Curve

