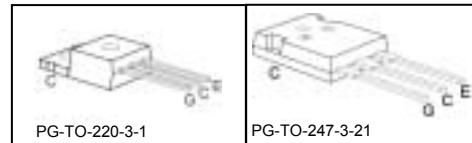



Low Loss IGBT in TrenchStop® and Fieldstop technology

- Very low $V_{CE(sat)}$ 1.5 V (typ.)
- Maximum Junction Temperature 175 °C
- Short circuit withstand time – 5μs
- Designed for :
 - Frequency Converters
 - Uninterruptible Power Supply
- TrenchStop® and Fieldstop technology for 600 V applications offers :
 - very tight parameter distribution
 - high ruggedness, temperature stable behavior
 - very high switching speed
- Positive temperature coefficient in $V_{CE(sat)}$
- Low EMI
- Low Gate Charge
- Qualified according to JEDEC¹ for target applications
- Pb-free lead plating; RoHS compliant
- Complete product spectrum and PSpice Models : <http://www.infineon.com/igbt/>



| Type | V_{CE} | I_c | $V_{CE(sat), T_j=25^\circ\text{C}}$ | $T_{j,\text{max}}$ | Marking Code | Package |
|-----------|----------|-------|-------------------------------------|--------------------|--------------|----------------|
| IGP30N60T | 600V | 30A | 1.5V | 175°C | G30T60 | PG-T0-220-3-1 |
| IGW30N60T | 600V | 30A | 1.5V | 175°C | G30T60 | PG-T0-247-3-21 |

Maximum Ratings

| Parameter | Symbol | Value | Unit |
|--|--------------------|------------|------|
| Collector-emitter voltage | V_{CE} | 600 | V |
| DC collector current, limited by $T_{j,\text{max}}$ | I_c | | A |
| $T_C = 25^\circ\text{C}$ | | 60 | |
| $T_C = 100^\circ\text{C}$ | | 30 | |
| Pulsed collector current, t_p limited by $T_{j,\text{max}}$ | $I_{C\text{puls}}$ | 90 | |
| Turn off safe operating area ($V_{CE} \leq 600\text{V}$, $T_j \leq 175^\circ\text{C}$) | - | 90 | |
| Gate-emitter voltage | V_{GE} | ± 20 | V |
| Short circuit withstand time ²⁾ $V_{GE} = 15\text{V}$, $V_{CC} \leq 400\text{V}$, $T_j \leq 150^\circ\text{C}$ | t_{SC} | 5 | μs |
| Power dissipation $T_C = 25^\circ\text{C}$ | P_{tot} | 187 | W |
| Operating junction temperature | T_j | -40...+175 | °C |
| Storage temperature | T_{stg} | -55...+175 | |
| Soldering temperature, 1.6mm (0.063 in.) from case for 10s | - | 260 | |

¹ J-STD-020 and JESD-022

²⁾ Allowed number of short circuits: <1000; time between short circuits: >1s.

Thermal Resistance

| Parameter | Symbol | Conditions | Max. Value | Unit |
|--|------------|---------------------------------|------------|------|
| Characteristic | | | | |
| IGBT thermal resistance, junction – case | R_{thJC} | | 0.80 | K/W |
| Thermal resistance, junction – ambient | R_{thJA} | PG-TO-220-3-1 PG-TO-247-3-21 | 62 40 | |

Electrical Characteristic, at $T_j = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------------------|----------------------|---|-------|------|------|---------------|
| | | | min. | typ. | max. | |
| Static Characteristic | | | | | | |
| Collector-emitter breakdown voltage | $V_{(BR)CES}$ | $V_{GE}=0\text{V}, I_C=0.2\text{mA}$ | 600 | - | - | V |
| Collector-emitter saturation voltage | $V_{CE(\text{sat})}$ | $V_{GE} = 15\text{V}, I_C=30\text{A}$ | - | 1.5 | 2.05 | |
| | | $T_j=25^\circ\text{C}$ $T_j=175^\circ\text{C}$ | - | 1.9 | - | |
| Gate-emitter threshold voltage | $V_{GE(\text{th})}$ | $I_C=0.43\text{mA}, V_{CE}=V_{GE}$ | 4.1 | 4.9 | 5.7 | |
| Zero gate voltage collector current | I_{CES} | $V_{CE}=600\text{V}, V_{GE}=0\text{V}$ | - | - | - | |
| | | $T_j=25^\circ\text{C}$ | - | - | 40 | μA |
| | | $T_j=175^\circ\text{C}$ | - | - | 1000 | |
| Gate-emitter leakage current | I_{GES} | $V_{CE}=0\text{V}, V_{GE}=20\text{V}$ | - | - | 100 | nA |
| Transconductance | g_{fs} | $V_{CE}=20\text{V}, I_C=30\text{A}$ | - | 16.7 | - | S |
| Integrated gate resistor | R_{Gint} | | | - | - | Ω |

Dynamic Characteristic

| | | | | | | |
|--|-------------------|---|---|------|---|----|
| Input capacitance | C_{iss} | $V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$ | - | 1630 | - | pF |
| Output capacitance | C_{oss} | | - | 108 | - | |
| Reverse transfer capacitance | C_{rss} | | - | 50 | - | |
| Gate charge | Q_{Gate} | $V_{CC}=480\text{V}, I_C=30\text{A}$ $V_{GE}=15\text{V}$ | - | 167 | - | nC |
| Internal emitter inductance measured 5mm (0.197 in.) from case | L_E | PG-TO-220-3-1 | - | 7 | - | nH |
| | | PG-TO-247-3-21 | - | 13 | - | |
| Short circuit collector current ¹⁾ | $I_{C(SC)}$ | $V_{GE}=15\text{V}, t_{SC}\leq 5\mu\text{s}$ $V_{CC} = 400\text{V}, T_j = 150^\circ\text{C}$ | - | 275 | - | A |

¹⁾ Allowed number of short circuits: <1000; time between short circuits: >1s.

Switching Characteristic, Inductive Load, at $T_j=25\text{ }^\circ\text{C}$

| Parameter | Symbol | Conditions | Value | | | Unit |
|----------------------------|--------------|---|-------|------|------|------|
| | | | min. | Typ. | max. | |
| IGBT Characteristic | | | | | | |
| Turn-on delay time | $t_{d(on)}$ | $T_j=25\text{ }^\circ\text{C}$, $V_{CC}=400\text{V}$, $I_C=30\text{A}$, $V_{GE}=0/15\text{V}$, $R_G=10.6\text{ }\Omega$, $L_\sigma^{(1)}=136\text{nH}$, $C_\sigma^{(1)}=39\text{pF}$ Energy losses include “tail” and diode reverse recovery. ²⁾ | - | 23 | - | ns |
| Rise time | t_r | | - | 21 | - | |
| Turn-off delay time | $t_{d(off)}$ | | - | 254 | - | |
| Fall time | t_f | | - | 46 | - | |
| Turn-on energy | E_{on} | | - | 0.69 | - | mJ |
| Turn-off energy | E_{off} | | - | 0.77 | - | |
| Total switching energy | E_{ts} | | - | 1.46 | - | |

Switching Characteristic, Inductive Load, at $T_j=175\text{ }^\circ\text{C}$

| Parameter | Symbol | Conditions | Value | | | Unit |
|----------------------------|--------------|--|-------|------|------|------|
| | | | min. | Typ. | max. | |
| IGBT Characteristic | | | | | | |
| Turn-on delay time | $t_{d(on)}$ | $T_j=175\text{ }^\circ\text{C}$, $V_{CC}=400\text{V}$, $I_C=30\text{A}$, $V_{GE}=0/15\text{V}$, $R_G=10.6\text{ }\Omega$, $L_\sigma^{(1)}=136\text{nH}$, $C_\sigma^{(1)}=39\text{pF}$ Energy losses include “tail” and diode reverse recovery. ²⁾ | - | 24 | - | ns |
| Rise time | t_r | | - | 26 | - | |
| Turn-off delay time | $t_{d(off)}$ | | - | 292 | - | |
| Fall time | t_f | | - | 90 | - | |
| Turn-on energy | E_{on} | | - | 1.0 | - | mJ |
| Turn-off energy | E_{off} | | - | 1.1 | - | |
| Total switching energy | E_{ts} | | - | 2.1 | - | |

¹⁾ Leakage inductance L_σ and Stray capacity C_σ due to dynamic test circuit in Figure E.

²⁾ Includes Reverse Recovery Losses from IKW30N60T due to dynamic test circuit in Figure E.

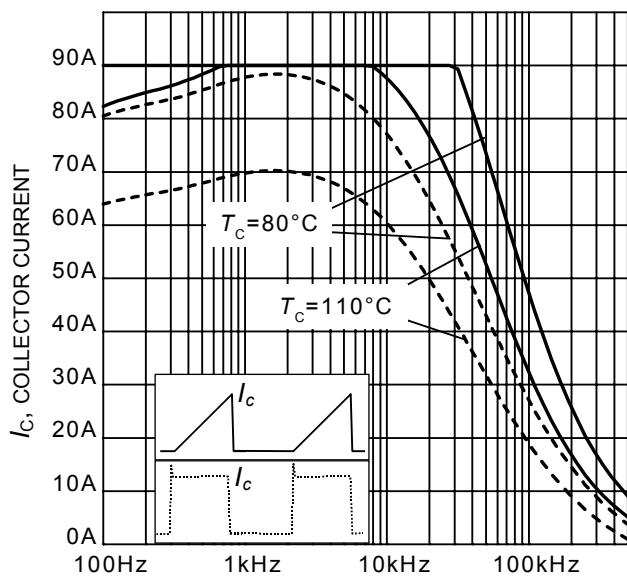

 f , SWITCHING FREQUENCY

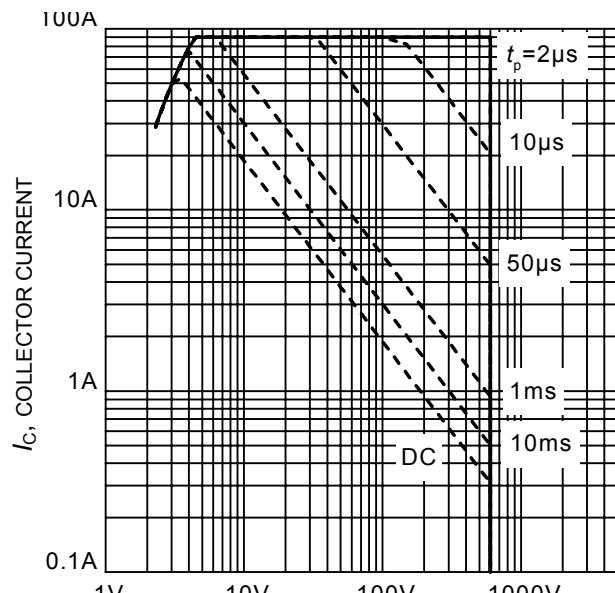
Figure 1. Collector current as a function of switching frequency
 $(T_j \leq 175^\circ\text{C}, D = 0.5, V_{CE} = 400\text{V}, V_{GE} = 0/+15\text{V}, R_G = 10\Omega)$

 V_{CE} , COLLECTOR-EMITTER VOLTAGE

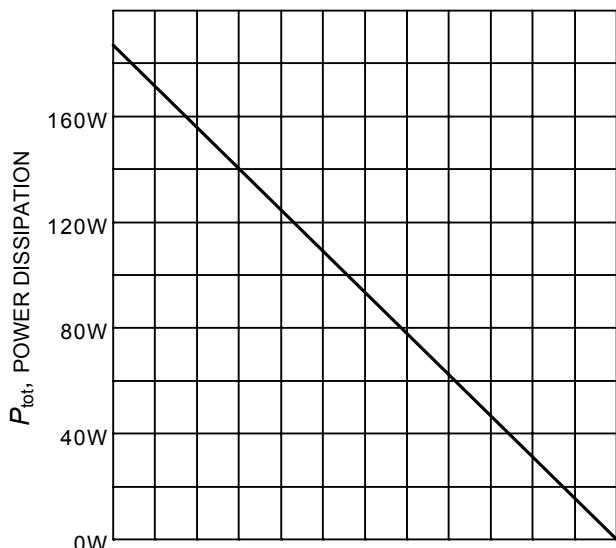
Figure 2. Safe operating area
 $(D = 0, T_c = 25^\circ\text{C}, T_j \leq 175^\circ\text{C}, V_{GE} = 15\text{V})$

 T_c , CASE TEMPERATURE

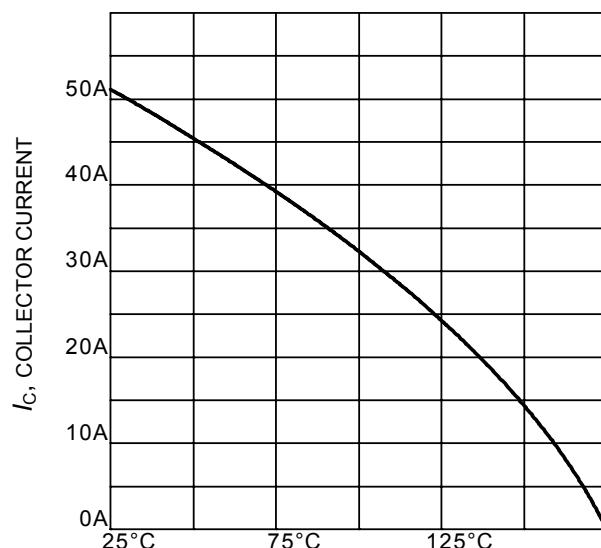
Figure 3. Power dissipation as a function of case temperature
 $(T_j \leq 175^\circ\text{C})$

 T_c , CASE TEMPERATURE

Figure 4. Collector current as a function of case temperature
 $(V_{GE} \geq 15\text{V}, T_j \leq 175^\circ\text{C})$

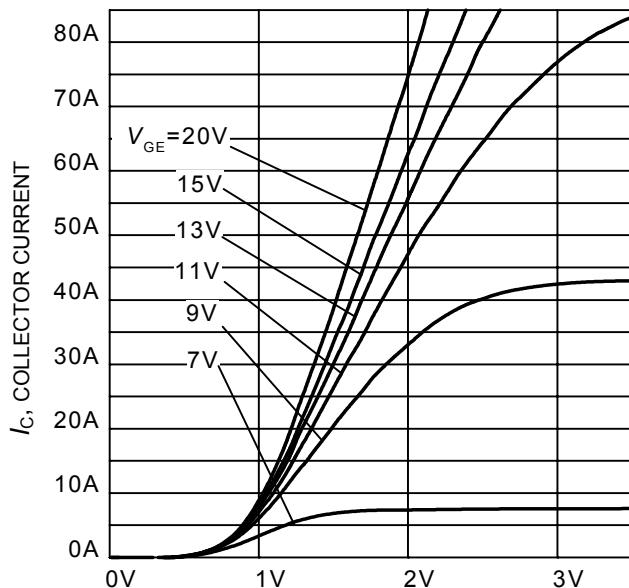

 V_{CE} , COLLECTOR-EMITTER VOLTAGE

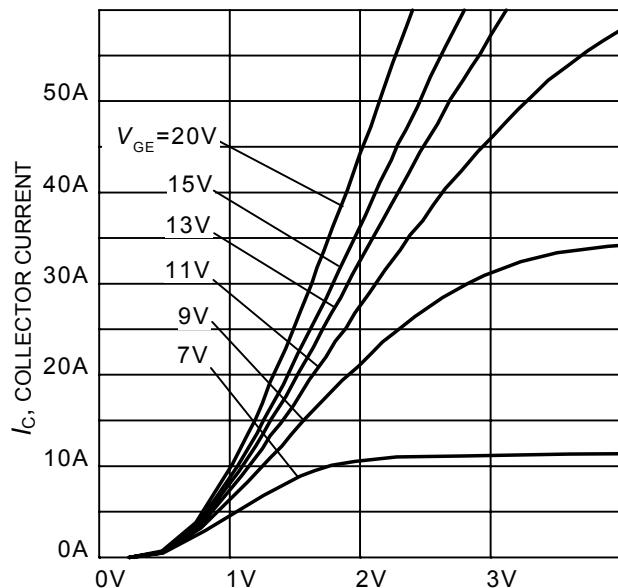
Figure 5. Typical output characteristic
($T_j = 25^\circ\text{C}$)

 V_{CE} , COLLECTOR-EMITTER VOLTAGE

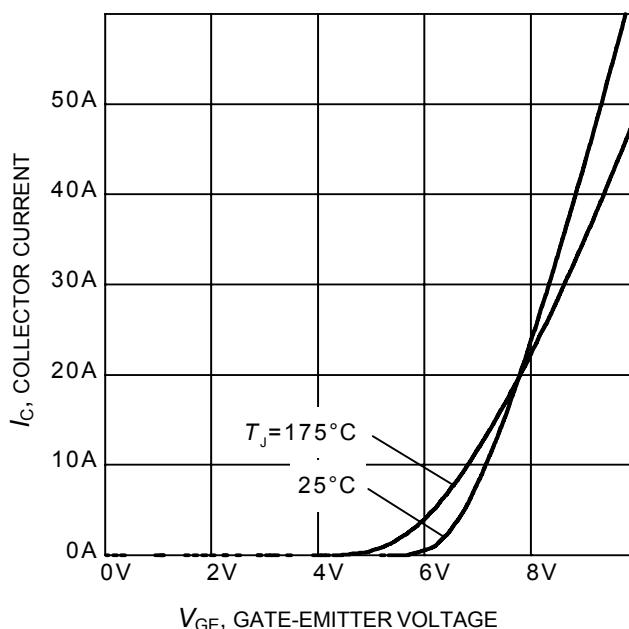
Figure 6. Typical output characteristic
($T_j = 175^\circ\text{C}$)

 V_{GE} , GATE-EMITTER VOLTAGE

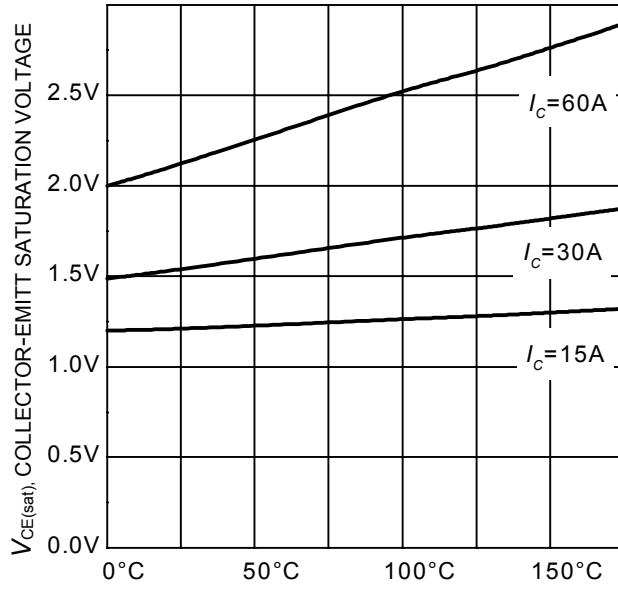
Figure 7. Typical transfer characteristic
($V_{CE}=20\text{V}$)

 T_j , JUNCTION TEMPERATURE

Figure 8. Typical collector-emitter saturation voltage as a function of junction temperature
($V_{GE} = 15\text{V}$)

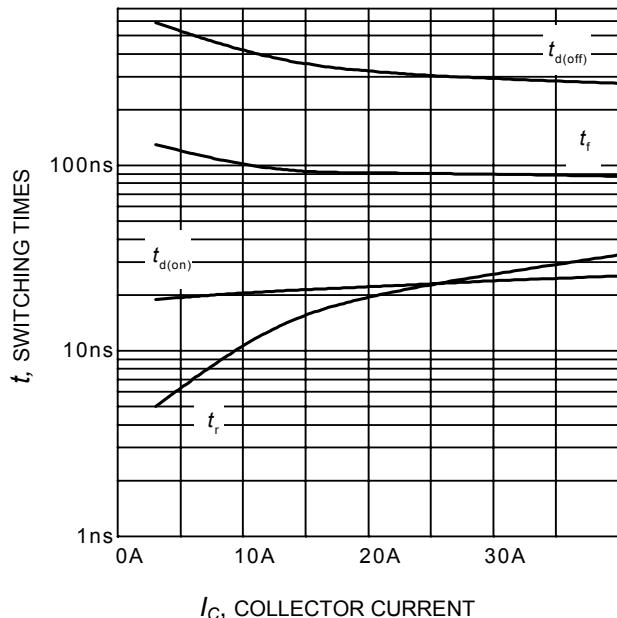


Figure 9. Typical switching times as a function of collector current
(inductive load, $T_J=175^\circ\text{C}$,
 $V_{CE} = 400\text{V}$, $V_{GE} = 0/15\text{V}$, $R_G = 10\Omega$,
Dynamic test circuit in Figure E)

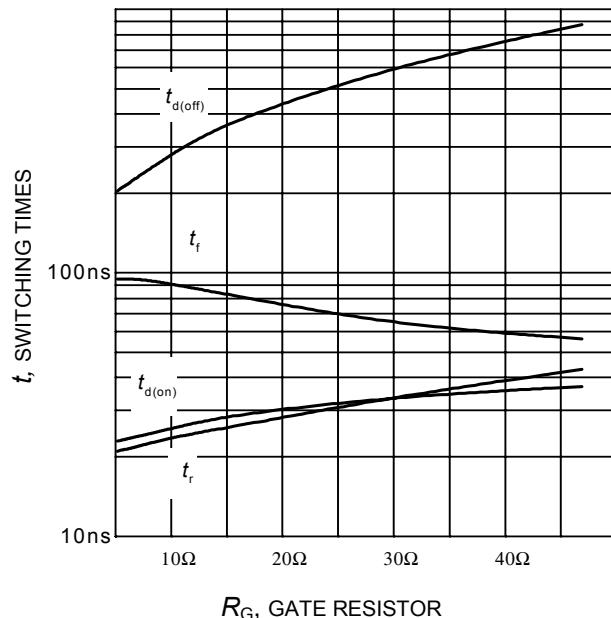


Figure 10. Typical switching times as a function of gate resistor
(inductive load, $T_J = 175^\circ\text{C}$,
 $V_{CE} = 400\text{V}$, $V_{GE} = 0/15\text{V}$, $I_C = 30\text{A}$,
Dynamic test circuit in Figure E)

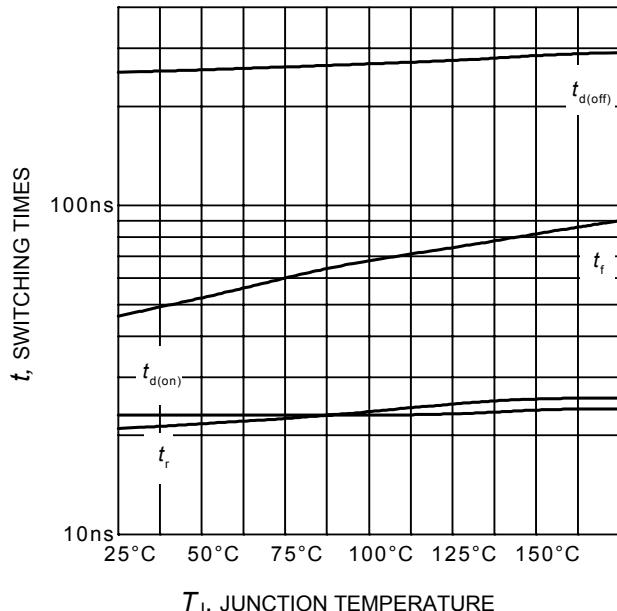


Figure 11. Typical switching times as a function of junction temperature
(inductive load, $V_{CE} = 400\text{V}$,
 $V_{GE} = 0/15\text{V}$, $I_C = 30\text{A}$, $R_G = 10\Omega$,
Dynamic test circuit in Figure E)

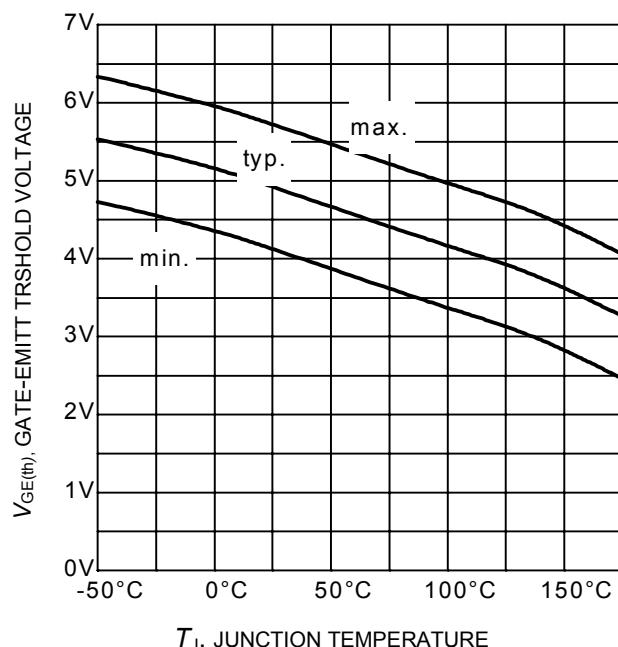


Figure 12. Gate-emitter threshold voltage as a function of junction temperature
($I_C = 0.43\text{mA}$)

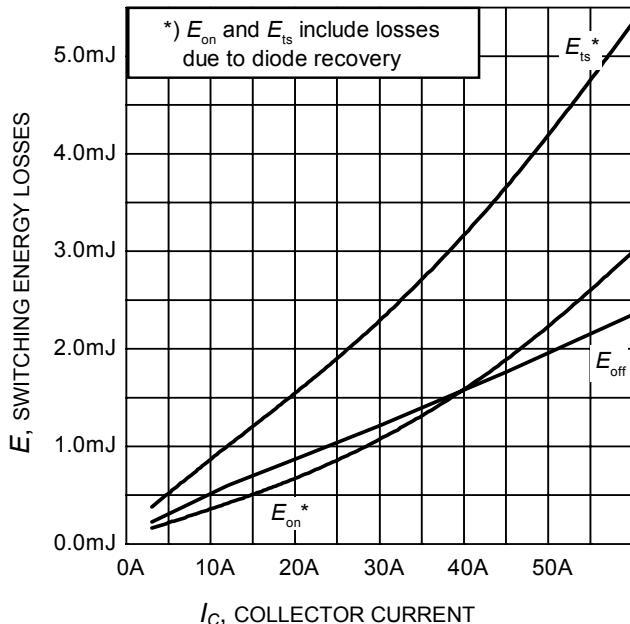


Figure 13. Typical switching energy losses as a function of collector current
(inductive load, $T_J = 175^\circ\text{C}$,
 $V_{CE} = 400\text{V}$, $V_{GE} = 0/15\text{V}$, $R_G = 10\Omega$,
Dynamic test circuit in Figure E)

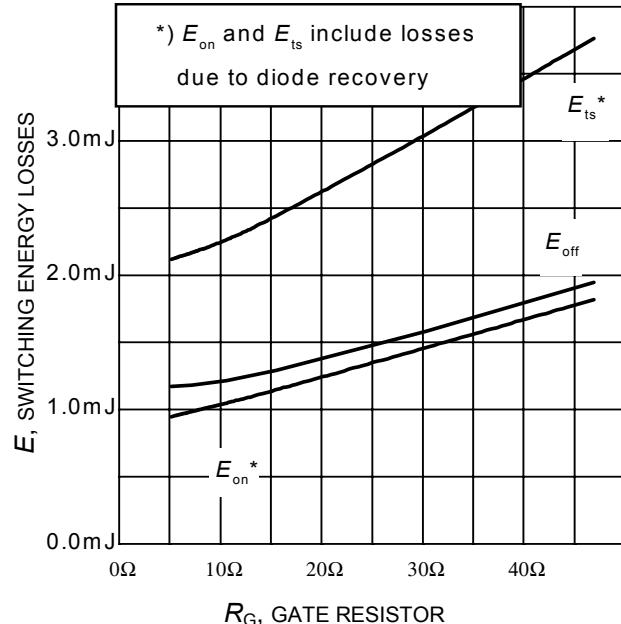


Figure 14. Typical switching energy losses as a function of gate resistor
(inductive load, $T_J = 175^\circ\text{C}$,
 $V_{CE} = 400\text{V}$, $V_{GE} = 0/15\text{V}$, $I_C = 30\text{A}$,
Dynamic test circuit in Figure E)

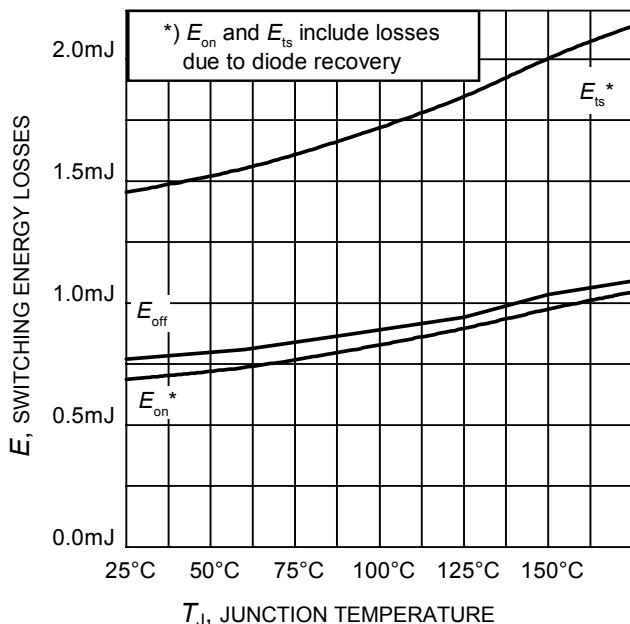


Figure 15. Typical switching energy losses as a function of junction temperature
(inductive load, $V_{CE} = 400\text{V}$,
 $V_{GE} = 0/15\text{V}$, $I_C = 30\text{A}$, $R_G = 10\Omega$,
Dynamic test circuit in Figure E)

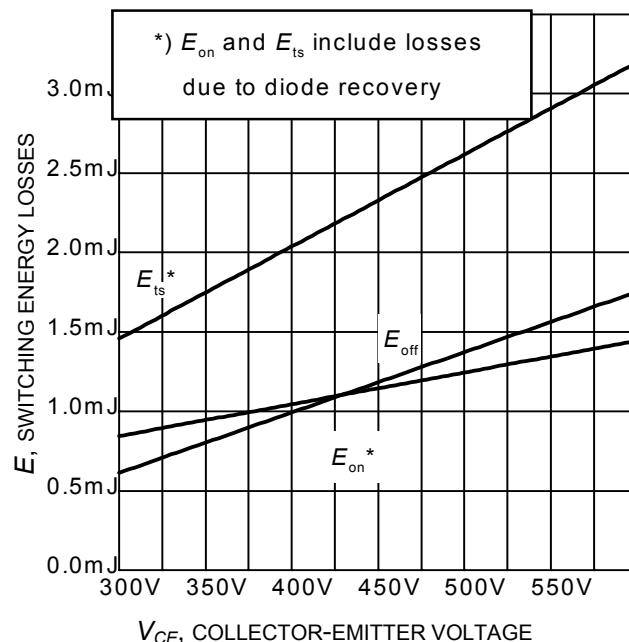


Figure 16. Typical switching energy losses as a function of collector-emitter voltage
(inductive load, $T_J = 175^\circ\text{C}$,
 $V_{GE} = 0/15\text{V}$, $I_C = 30\text{A}$, $R_G = 10\Omega$,
Dynamic test circuit in Figure E)

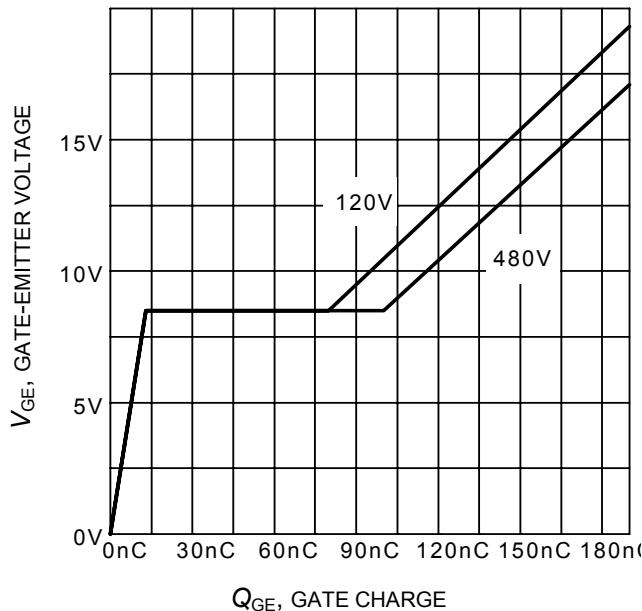


Figure 17. Typical gate charge
($I_C=30$ A)

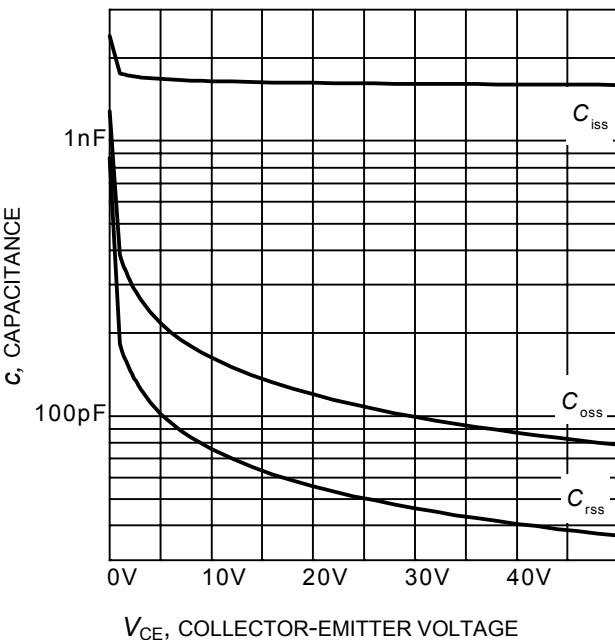


Figure 18. Typical capacitance as a function of collector-emitter voltage
($V_{GE}=0$ V, $f = 1$ MHz)

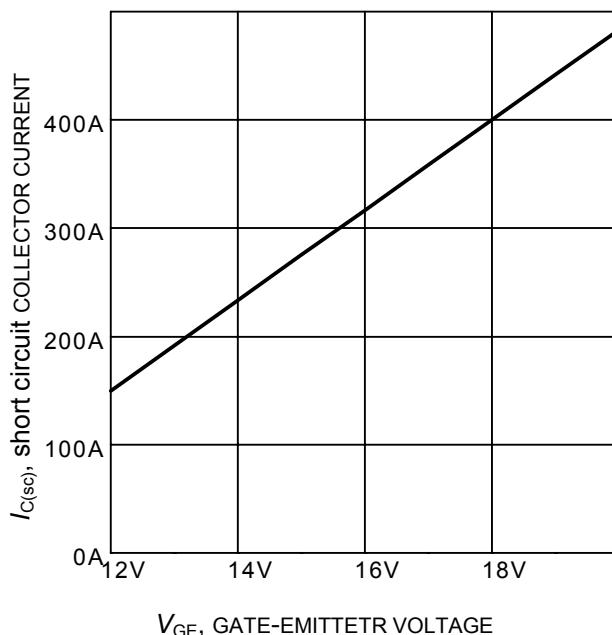


Figure 19. Typical short circuit collector current as a function of gate-emitter voltage
($V_{CE} \leq 400$ V, $T_j \leq 150^\circ\text{C}$)

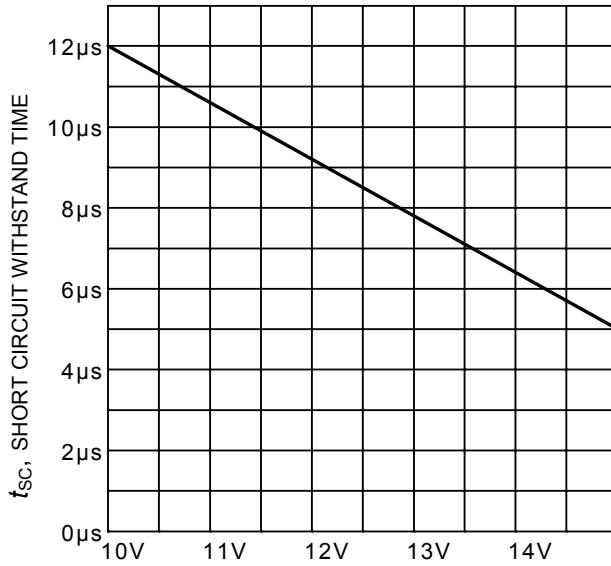


Figure 20. Short circuit withstand time as a function of gate-emitter voltage
($V_{CE}=600$ V, start at $T_j=25^\circ\text{C}$, $T_{jmax}<150^\circ\text{C}$)

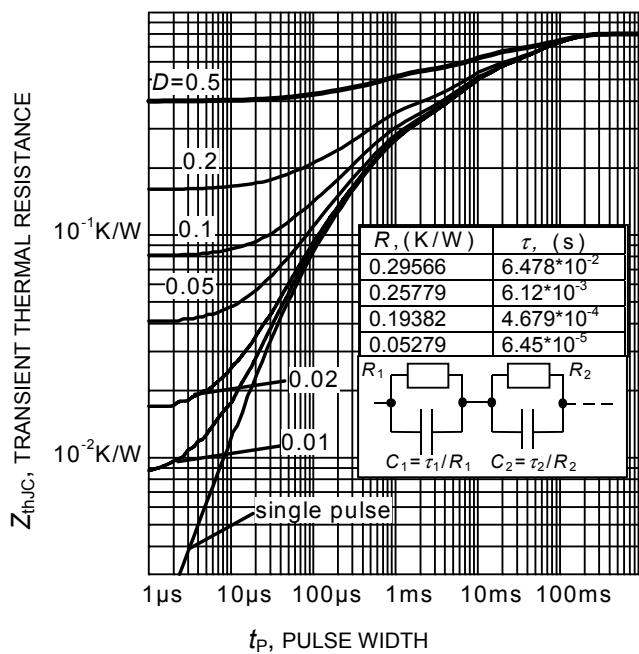
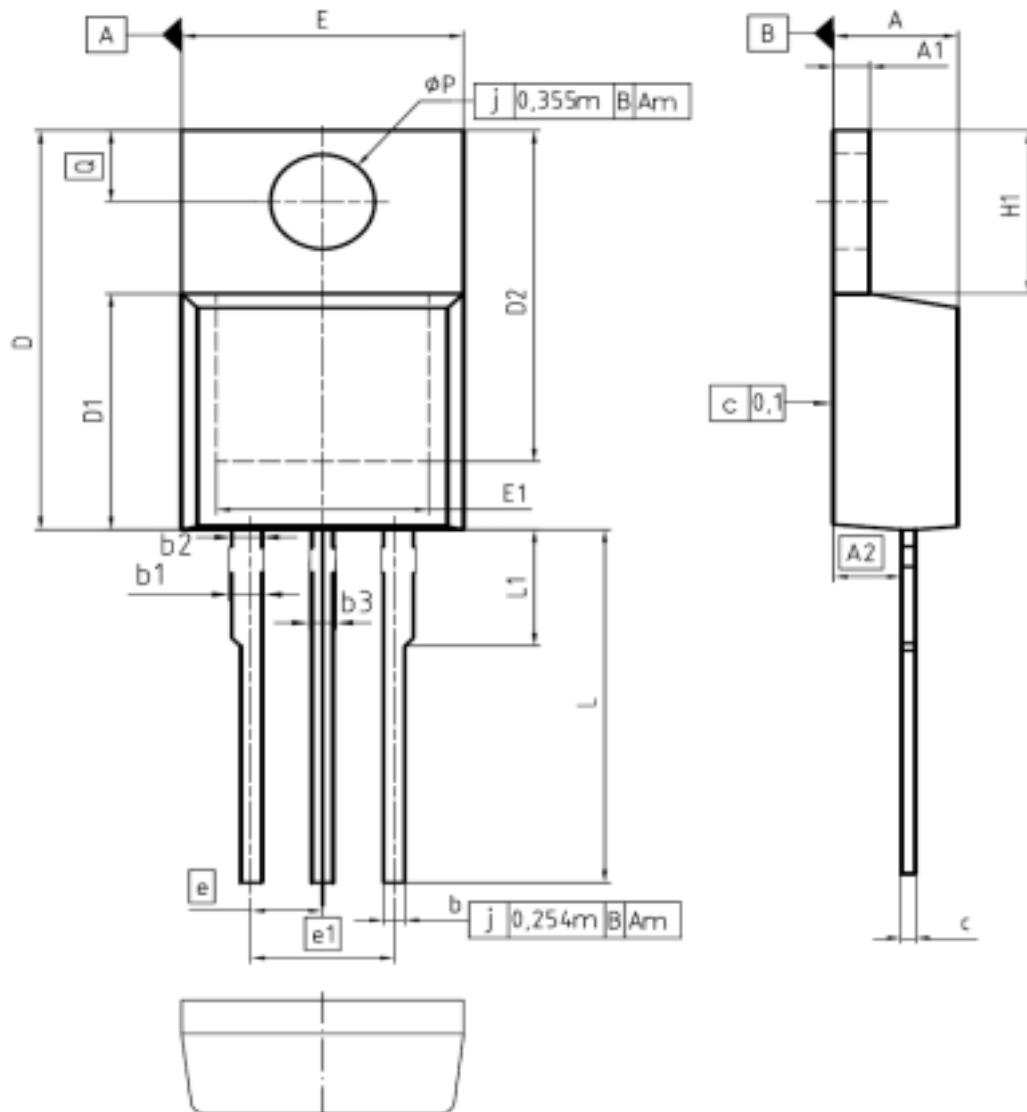


Figure 21. IGBT transient thermal resistance
 $(D = t_p / T)$

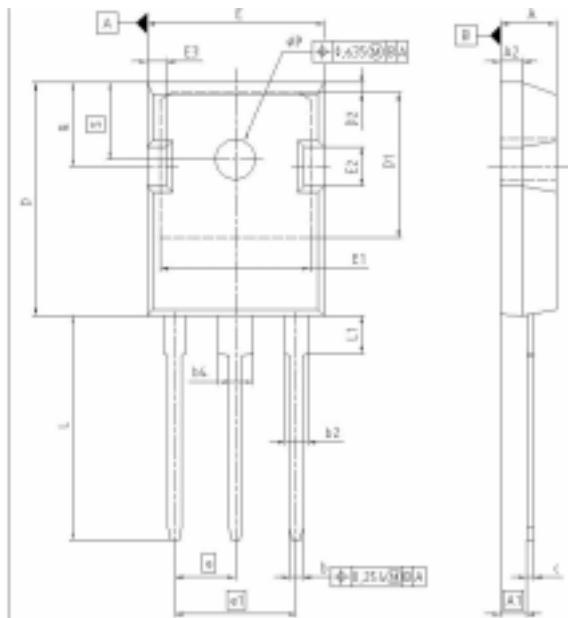
PG-T0-220-3-1



| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|--------|-------|
| | MIN | MAX | MIN | MAX |
| A | 4.30 | 4.57 | 0.169 | 0.180 |
| A1 | 1.17 | 1.40 | 0.046 | 0.055 |
| A2 | 2.15 | 2.72 | 0.085 | 0.107 |
| b | 0.65 | 0.86 | 0.026 | 0.034 |
| b1 | 0.95 | 1.40 | 0.037 | 0.055 |
| b2 | 0.95 | 1.15 | 0.037 | 0.045 |
| b3 | 0.65 | 1.15 | 0.026 | 0.045 |
| c | 0.33 | 0.60 | 0.013 | 0.024 |
| D | 14.81 | 15.95 | 0.583 | 0.628 |
| D1 | 8.51 | 9.45 | 0.335 | 0.372 |
| D2 | 12.19 | 13.10 | 0.480 | 0.516 |
| E | 9.70 | 10.36 | 0.382 | 0.408 |
| E1 | 6.50 | 8.80 | 0.256 | 0.339 |
| e | 2.54 | | 0.100 | |
| e1 | 5.08 | | 0.200 | |
| N | 3 | | 3 | |
| H1 | 5.90 | 6.90 | 0.232 | 0.272 |
| L | 13.00 | 14.00 | 0.512 | 0.551 |
| L1 | - | 4.80 | - | 0.189 |
| aP | 3.60 | 3.89 | 0.142 | 0.153 |
| Q | 2.60 | 3.00 | 0.102 | 0.118 |

| | |
|---------------------|--------------------------|
| DOCUMENT NO. | Z8800003318 |
| SCALE | 0 2.5 0 2.5 5mm |
| EUROPEAN PROJECTION | |
| | |
| ISSUE DATE | 23-08-2007 |
| REVISION | 05 |

PG-T0247-3-21



| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|--------|--------|-------|
| | MIN | MAX | MIN | MAX |
| A | 4.905 | 5.157 | 0.193 | 0.203 |
| A1 | 2.273 | 2.527 | 0.092 | 0.098 |
| A2 | 1.853 | 2.107 | 0.075 | 0.081 |
| b | 1.073 | 1.327 | 0.047 | 0.052 |
| b2 | 1.903 | 2.386 | 0.075 | 0.094 |
| b4 | 2.870 | 3.454 | 0.113 | 0.138 |
| c | 0.549 | 0.752 | 0.024 | 0.030 |
| D | 20.823 | 21.077 | 0.820 | 0.830 |
| D1 | 17.323 | 17.851 | 0.682 | 0.702 |
| D2 | 1.063 | 1.317 | 0.042 | 0.052 |
| E | 15.773 | 16.027 | 0.621 | 0.631 |
| E1 | 13.893 | 14.847 | 0.547 | 0.587 |
| E2 | 3.893 | 3.937 | 0.145 | 0.155 |
| E3 | 1.663 | 1.997 | 0.066 | 0.076 |
| e | 5.450 | | 0.215 | |
| e1 | 10.900 | | 0.430 | |
| N | 3 | | 3 | |
| L | 20.053 | 20.307 | 0.793 | 0.799 |
| L1 | 4.168 | 4.472 | 0.164 | 0.176 |
| eP | 3.559 | 3.661 | 0.140 | 0.144 |
| Q | 5.493 | 5.747 | 0.215 | 0.226 |
| S | 6.913 | 6.297 | 0.270 | 0.248 |

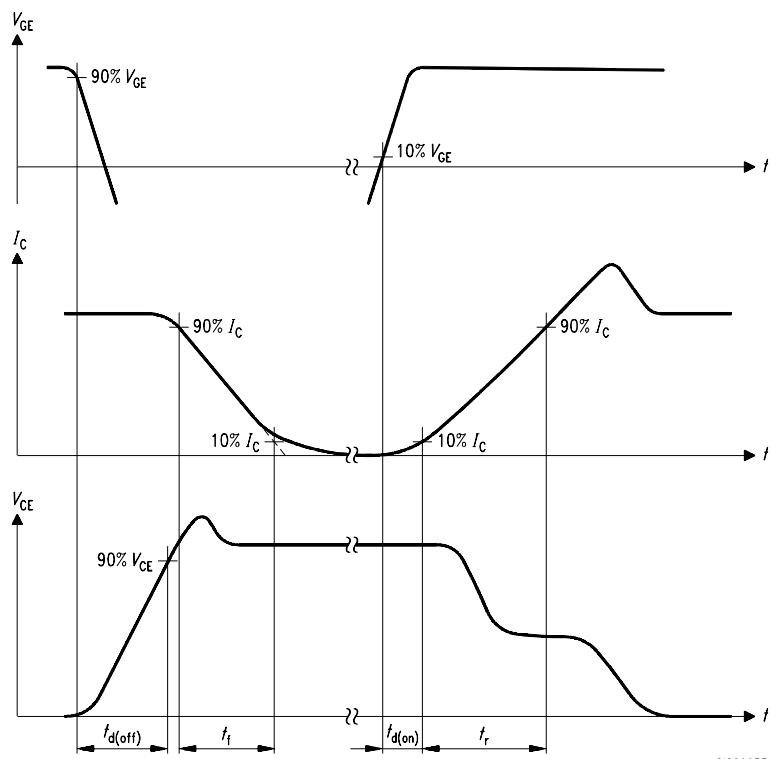


Figure A. Definition of switching times

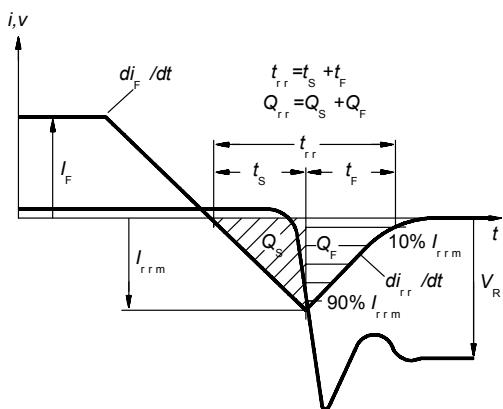


Figure C. Definition of diodes switching characteristics

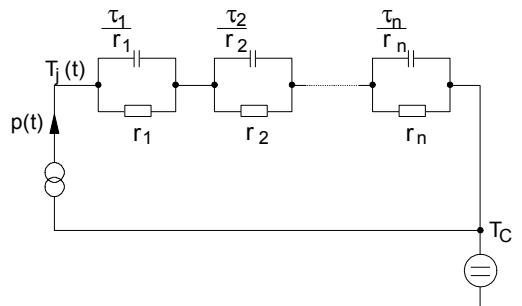


Figure D. Thermal equivalent circuit

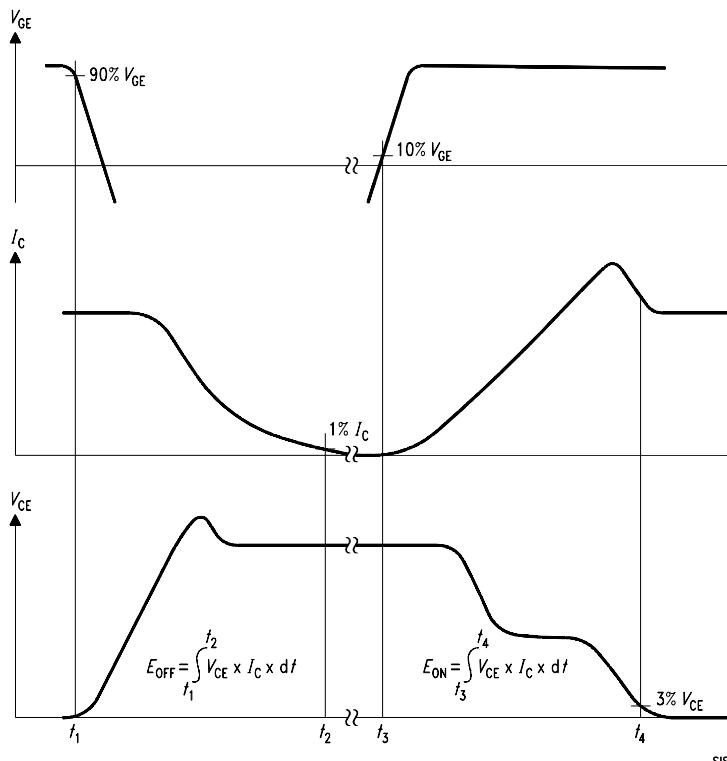


Figure B. Definition of switching losses

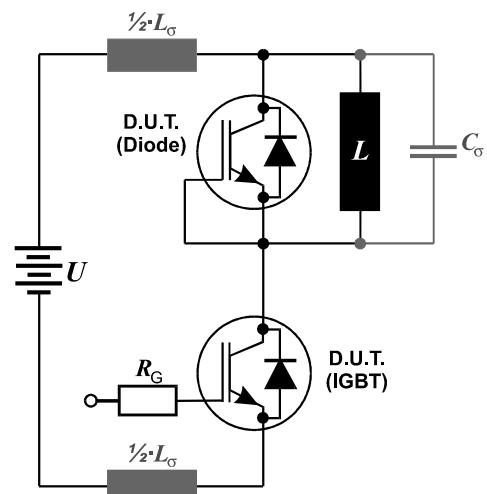


Figure E. Dynamic test circuit

Edition 2006-01

Published by

**Infineon Technologies AG
81726 München, Germany**

© Infineon Technologies AG 9/12/07.

All Rights Reserved.

Attention please!

The information given in this data sheet shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.