

Features

- Low Cost
- Compact Size
- Gold Plated Solder Pins
- Rugged Die cast Construction
- 10Hz to 5000Hz IF Bandwidth
- Lead Free (RoHS Compliant)

Description and Applications

M/A-COM's MACS-007801-0M1RM0 is a RoHS Compliant K-Band Local Oscillator consisting of a Gunn Diode oscillator assembled into a die cast waveguide package. These Local Oscillators are well suited for high volume applications where small size and reliability are required. Typical applications include police radar and presence sensing applications.

Product Specifications

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Operating Frequency	+25 °C	GHz	24.100	24.125	24.150
Output Power	+25 °C	mW	5.0		
Operating Current	+25 °C	mA	60	85	100
Operating Voltage	+25 °C	VDC		5.0	
Schottky Diode Noise	+25 °C	micro-Volts		2.5	5.0
Transceiver Sensitivity	+25 °C	-dBc	-90	-103	

Operating temperature to full specification -30°C to +70°

Absolute Maximum Ratings¹

Parameter	Maximum Ratings
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C
Incident RF Input Power	+20 dBm
DC Input (Gunn Diode)	+5.5VDC
Soldering Temperature	+260 °C max.

1. Exceeding these limits may cause permanent damage.

Note: Device is ESD Sensitive. Proper ESD Precautions should be used when handling this Device..


Package Outline



PIN Configuration

PIN	Function
1	DC Input
2	GND
3	IF Output

Functional Block Diagram

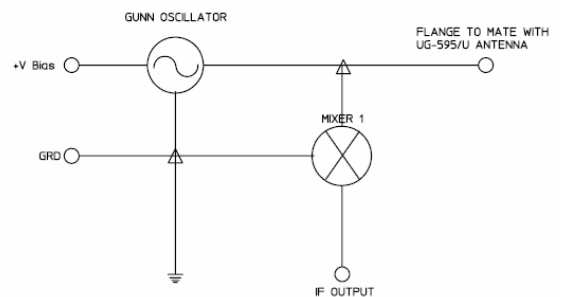


MACS-007801-0M1RM0






Stereo Doppler Transceiver
24.125 GHz

M/A-COM Products
Rev. V2

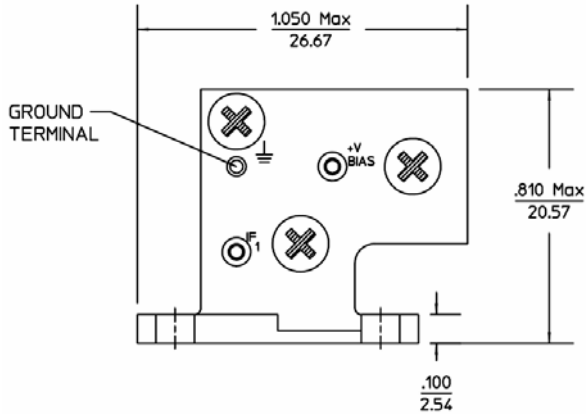

Label Information

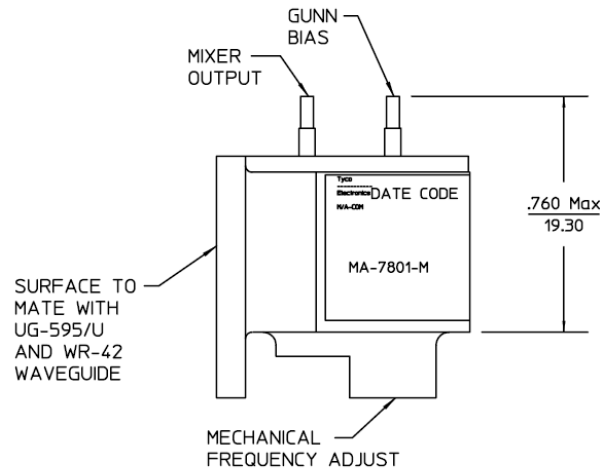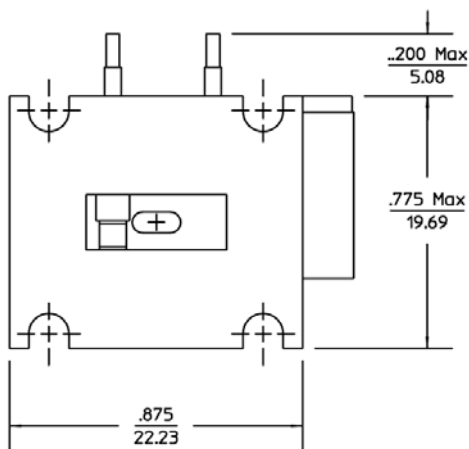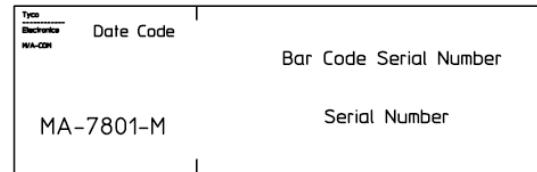

ADVANCED: Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.