


Schottky MiniMod FST 80

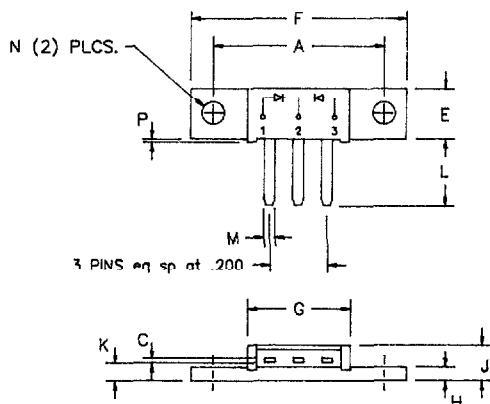

Dim.	Millimeter			
	Minimum	Maximum	Minimum	Maximum Notes
A	1.180	1.195	29.97	30.35
C	.027	.037	0.69	0.94
E	.350	.370	8.89	9.40
F	1.490	1.510	37.85	38.35
G	.695	.715	17.65	18.16
H	.088	.098	2.24	2.49
J	.240	.260	6.10	6.60
K	.113	.135	2.92	3.43
L	.460	.480	11.68	12.19
M	.065	.085	1.65	2.16
N	.151	.161	3.84	4.09
P	.015	.025	0.38	0.64 Dia.

Microsemi
Catalog Number

Working
Peak Reverse
Voltage

Repetitive
Peak Reverse
Voltage

FST8035*	35V	35V
FST8040*	40V	40V
FST8045*	45V	45V
FST8050*	50V	50V

*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- Common Cathode Center Tap
- 2X40 Amperes avg.
- 175°C Junction Temperature
- Reverse Energy Tested
- VRRM = 35 to 50 Volts

Electrical Characteristics

Average forward current per pkg	I _{F(AV)} 80 Amps	T _C = 145°C, Square wave, R _{θJC} = 0.5°C/W
Average forward current per leg	I _{F(AV)} 40 Amps	T _C = 145°C, Square wave, R _{θJC} = 1.0°C/W
Maximum surge current per leg	I _{FSM} 800 Amps	8.3 ms, half sine, T _J = 175°C
Max repetitive peak reverse current per leg	I _{R(OV)} 2 Amps	f = 1 KHZ, 25°C, 1 usec square wave
Max peak forward voltage per leg	V _{FM} 0.49 Volts	I _{FM} = 40A; T _J = 175°C*
Max peak forward voltage per leg	V _{FM} 0.68 Volts	I _{FM} = 40A; T _J = 25°C*
Max peak reverse current per leg	I _{RM} 50 mA	V _{RRM} , T _J = 125°C*
Typical reverse current per leg	I _{RM} 4 uA	V _{RRM} , T _J = 25°C
Typical junction capacitance	C _J 1900 pF	V _R = 5.0V, T _C = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-40°C to 175°C
Operating junction temp range	T _J	-40°C to 175°C
Max thermal resistance per leg per package	R _{θJC}	1.0°C/W Junction to case
Typical thermal resistance	R _{θJC}	0.5°C/W Junction to case
Mounting Base Torque	R _{θCS}	0.3°C/W Case to sink
Weight		10 inch pounds maximum
		0.3 ounce (8.4 grams) typical

**Microsemi Corp.
Colorado**

C-196

PH: 303-469-2161
FAX: 303-466-3775

FST 80

C

Figure 1
Maximum Forward Characteristics – Per Leg

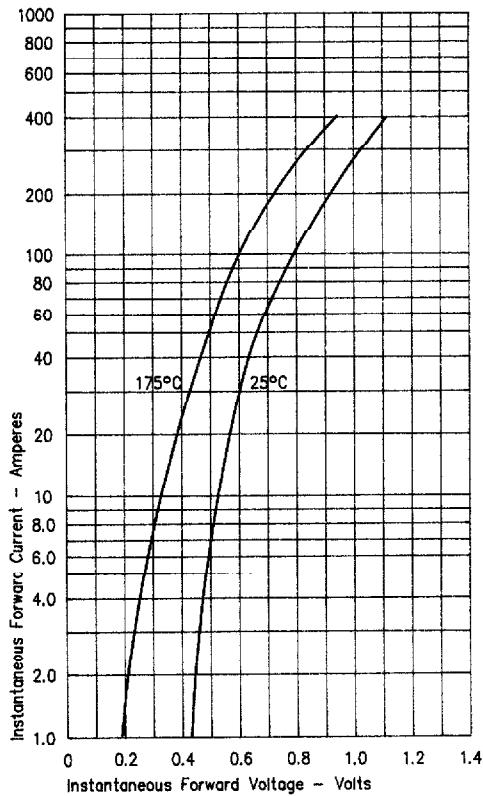


Figure 2
Typical Reverse Characteristics – Per Leg

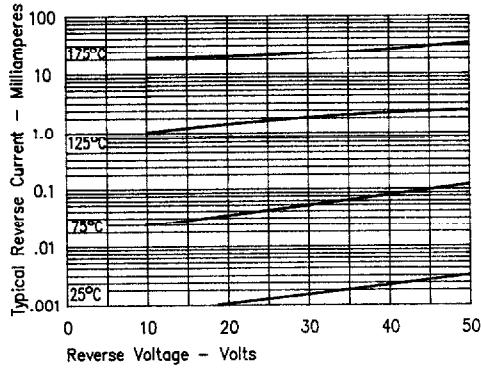


Figure 3
Typical Junction Capacitance – Per Leg

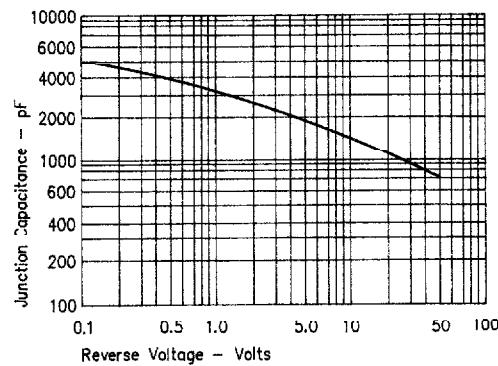


Figure 4
Forward Current Derating – Per Leg

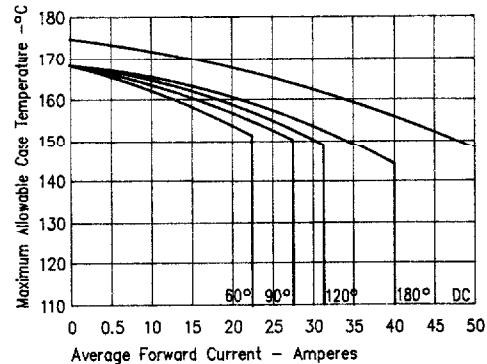


Figure 5
Maximum Forward Power Dissipation – Per Leg

