

*** ARMY TM 9-6115-643-24P AIR FORCE TO 35C2-3-445-24**

TECHNICAL MANUAL

UNIT, DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

FOR

**GENERATOR SET, SKID MOUNTED,
TACTICAL QUIET, 15 kW, 50/60 Hz,
MEP-804A (NSN: 6115-01-274-7388)
MEP-804B (NSN: 6115-01-530-1458)**

**GENERATOR SET, SKID MOUNTED,
TACTICAL QUIET, 15 kW, 400 Hz,
MEP-814A (NSN: 6115-01-274-7393)
MEP-814B (NSN: 6115-01-529-9494)**

* This manual supersedes TM 9-6115-643-24P dated 30 October 1996, including all changes.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

HEADQUARTERS, DEPARTMENTS OF THE ARMY AND AIR FORCE

15 NOVEMBER 2008

LIST OF EFFECTIVE PAGES

INSERT LATEST CHANGED PAGES, DESTROY SUPERSEDED PAGES

Note: a vertical line in the outer margins of the page indicates the portion of the text affected by the changes. Changes to illustrations are indicated by miniature pointing hands. Shaded areas indicate changes to diagrams.

Dates of issue for original and changed pages are:

Original ... 0 ... 15 November 2008

TOTAL NUMBER OF PAGES IN THIS PUBLICATION IS 296, CONSISTING OF THE FOLLOWING:

Page No.	*Change No.	Page No.	*Change No.	Page No.	*Change No.
Title	0	2-106 Blank.....	0	4-1 – 4-71	0
Blank	0	2-107 – 2-126.....	0	4-72 Blank.....	0
A	0	2-127 Blank.....	0	Metric Table	0
B Blank	0	2-128 – 2-137.....	0	Back Cover	0
i – iii	0	2-138 Blank.....	0		
iv Blank	0	2-139 – 2-142.....	0		
1-1 – 1-8.....	0	2-143 Blank.....	0		
2-1 – 2-4.....	0	2-144 – 2-145.....	0		
2-5 Blank.....	0	2-146 Blank.....	0		
2-6 – 2-18.....	0	2-147 – 2-151.....	0		
2-19 Blank.....	0	2-152 Blank.....	0		
2-20 – 2-23.....	0	2-153 – 2-158.....	0		
2-24 Blank.....	0	2-159 Blank.....	0		
2-25 – 2-72.....	0	2-160 – 2-164.....	0		
2-73 Blank.....	0	2-165 Blank.....	0		
2-74 – 2-76.....	0	2-166 – 2-185.....	0		
2-77 Blank.....	0	2-186 Blank.....	0		
2-78 – 2-83.....	0	2-187 – 2-189.....	0		
2-84 Blank.....	0	2-190 Blank.....	0		
2-85 – 2-90.....	0	2-191 – 2-192.....	0		
2-91 Blank.....	0	3-1	0		
2-92 – 2-105.....	0	3-2 Blank.....	0		

* Zero in this column indicates an original page.

**TECHNICAL MANUAL
NO. 9-6115-643-24P**

**HEADQUARTERS, DEPARTMENTS
OF THE ARMY AND AIR FORCE
Washington, DC, 15 November 2008**

**UNIT, DIRECT SUPPORT, AND
GENERAL SUPPORT MAINTENANCE
REPAIR PARTS AND SPECIAL TOOLS LIST**

FOR

**GENERATOR SET, SKID MOUNTED
TACTICAL QUIET, 15 kW, 50/60Hz,
MEP-804A (NSN: 6115-01-274-7388)
MEP-804B (NSN: 6115-01-530-1458)**

**GENERATOR SET, SKID MOUNTED
TACTICAL QUIET, 15 kW, 400 Hz
MEP-814A (NSN: 6115-01-274-7393)
MEP-814B (NSN: 6115-01-529-9494)**

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Reports, as applicable by the requiring Service, should be submitted as follows:

- (a) (A) Army - Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms) located in the back of this manual directly to: Commander, U.S. Army Communications-Electronics Life Cycle Management Command (C-E LCMC) and Fort Monmouth, ATTN: AMSEL-LC-LEO-E-ED, Fort Monmouth, NJ 07703-5006. You may also send in your recommended changes via electronic mail or by fax. Our fax number is 732-532-1556, DSN 992-1556. Our e-mail address is MONM-AMSELLEOPUBSCHG@conus.army.mil. Our online web address for entering and submitting DA Form 2028s is <http://edm.monmouth.army.mil/pubs/2028.html>.
- (b) (F) Air Force - AFTO Form 22 directly to: Commander, Sacramento Air Logistics Center, ATTN: TILBA, McClellan AFB, CA 95652-5990.

A reply will be furnished to you.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

*** This manual supersedes TM 9-6115-643-24P dated 30 October 1996, including all changes.**

TABLE OF CONTENTS

		Page	Illus/ Figure
Section I	INTRODUCTION	1-1	
Section II	REPAIR PARTS LIST	2-1	
Group 01	D.C. Electrical System		
	Batteries and Cables	2-1	1
Group 02	Housing		
	Access Doors and Covers	2-6	2
	Front Housing Panels	2-15	3
	Rear Housing Panels	2-20	4
Group 03	Control Box Assembly		
	Control Box Installation	2-22	5
	Control Panel Switches and Indicators	2-25	6
	Control Box Assembly	2-29	7
	Control Box Harness Assembly	2-36	8
	Control Box Panels	2-74	9
Group 04	Air Intake and Exhaust System		
	Muffler and Pipes	2-78	10
	Turbocharger Installation	2-80	10.1
	Air Cleaner and Piping	2-82	11
Group 05	Coolant System		
	Coolant System	2-85	12
	Coolant System	2-92	12.1
Group 06	Fuel System		
	Fuel Tank, Lines and Fittings	2-95	13
	Fuel Tank, Lines and Fittings	2-102	13.1
Group 07	Output Box Assembly		
	Output Box Installation	2-104	14
	Engine/Output Box Harness	2-107	15
	Output Box Assembly	2-119	16
Group 08	Output Load Terminal Board		
	Load Terminal Board	2-124	17
Group 09	Engine Accessories		
	Engine Accessories	2-128	18
Group 10	Lubrication System		
	Oil Drain Line	2-136	19
	Lubrication Accessories	2-139	19.1
Group 11	Generator Assembly		
	Generator Installation	2-144	20
	Generator Assembly, 50/60 Hz	2-147	21
	Generator Assembly, 400 Hz	2-153	22
Group 12	Engine Assembly		
	Engine Installation	2-160	23
	Engine Installation	2-162	23.1
Group 13	Skid Base		
	Skid Base	2-166	24
Group 14	Winterization Kit		
	Winterization Kit	2-168	25
	Control Unit	2-170	26
	Plate, Operation and Heater Switch	2-172	27
	Pump, Fuel, Electrical, and Attachments	2-174	28
	Heater Assembly	2-176	29
	Heater Assembly Attachments	2-178	30
	Coolant Hoses and Attachments	2-180	31

	Exhaust Hoses and Heater Brace	2-182	32
	Wiring Harness, J1	2-184	33
	Electrical Leads	2-187	34
Group 15	Bulk Items	2-191	Bulk
Section III	SPECIAL TOOLS LIST	3-1	
Section IV	CROSS REFERENCE INDEXES	4-1	
	National Stock Number Index.....	4-1	
	Part Number Index	4-11	
	Figure and Item Number Index.....	4-41	

UNIT, DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

SECTION I. INTRODUCTION

1. Scope.

This RPSTL lists and authorizes spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE); and other special support equipment required for performance of unit, direct support, and general support maintenance of the 15kW, 50/60 and 400 Hz, Tactical Quiet Generator (TQG) Sets. It authorizes the requisitioning, issue, and disposition of spares, repair parts and special tools as indicated by the source, maintenance and recoverability (SMR) codes.

2. General.

In addition to Section I. Introduction, this Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized by this RPSTL for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending alphanumeric sequence, with the parts in each group listed in ascending figure and item number sequence. Repair parts kits are listed separately in their own functional group within Section II. Repair parts for repairable special tools are also listed in this section. Items listed are shown on the associated illustration(s)/figure(s).

b. Section III. Special Tools List. A list of special tools, special TMDE, and other special support equipment authorized by this RPSTL (as indicated by Basis of Issue (BOI) information in DESCRIPTION AND USABLE ON CODE (UOC) column) for the performance of maintenance.

c. Section IV. Cross Reference Indexes. A list, in National Item Identification Number (NIIN) sequence, of all National stock numbered items appearing in the listings, followed by a list in alphanumeric sequence of all part numbers appearing in the listing. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance. The figure and item number index lists figure and item number in alphanumeric sequence and cross references NSN, CAGEC and part number.

3. Explanation of Columns (Sections II and III).

- a. ITEM NO. (Column (1)). Indicates the number used to identify items called out in the illustration.
- b. SMR CODE (Column (2)). The Source, Maintenance, and Recoverability (SMR) code is a 5-position code containing supply/requisitioning information, maintenance category authorization criteria, and disposition instruction, as shown in the following breakout:

Source Code XX	Maintenance Code XX	Recoverability Code X	
1 st two positions:	3 rd position	4 th position	5 th position
How to get an item.	Who can install, replace, or use the item.	Who can do complete repair* on the item.	Who determines disposition action on unserviceable items.

3. Explanation of Columns (Sections II and III). - (Continued)

*Complete Repair: Maintenance capacity, capability, and authority to perform all corrective maintenance tasks of the "Repair" function in a use/user environment in order to restore serviceability to a failed item.

(1) Source Code. The source code tells you how you get an item needed for maintenance, repair, or overhaul, of an end item/equipment. Explanations of source codes follow:

<u>Source Code</u>	<u>Application/Explanation</u>
PA PB PC** PD PE PF PG	Stock items; use the applicable NSN to requisition/request items with these source codes. They are authorized to the level indicated by the code entered in the 3 rd position of the SMR code.
	**NOTE
	Items coded PC are subject to deterioration.
KD KF KB	Items with these codes are not to be requisitioned/requested individually. They are part of a kit which is authorized to the maintenance category indicated in the 3 rd position of the SMR code. The completed kit must be requisitioned and applied.
MO-Made at unit/ AVUM level MF-Made at DS/ AVIM level MH-Made at GS level ML-Made at SRA MD-Made at depot	Items with these codes are not to be requisitioned/requested individually. They must be made from bulk material which is identified by the P/N in the DESCRIPTION AND USABLE ON CODE (UOC) column and listed in the bulk material group of the RPSTL. If the item is authorized to you by the 3 rd position of the SMR code, but the source code indicates it is made at a higher level, order the item from the higher level of maintenance.
AO-Assembled by Unit/AVUM level AF-Assembled by DS/AVIM level AH-Assembled by GS level AL-Assembled by SRA AD-Assembled by Depot	Items with these codes are not to be requisitioned/requested individually. The parts that make up the assembled item must be requisitioned or fabricated and assembled at the level of maintenance indicated by the source code. If the 3 rd position of the SMR code authorizes you to replace the item, but the source code indicates the item is assembled at a higher level, order the item from the higher level of maintenance.
XA	Do not requisition an "XA" coded item. Order the next higher assembly. (Refer to NOTE below.)

3. **Explanation of Columns (Sections II and III). - (Continued)**

XB	If an item is not available from salvage, order it using the CAGEC and P/N.
XC	Installation drawing, diagram, instruction sheets, field service drawings; identified by manufacturer's P/N.
XD	Item is not stocked. Order an XD-coded item through normal supply channels using the CAGEC and P/N given, if no NSN is available.

NOTE

Cannibalization or controlled exchange, when authorized, may be used as a source of supply for items with the above source codes except for those items source coded "XA" or those aircraft support items restricted by the requirements of AR 750-1.

(2) Maintenance Code. Maintenance codes tell you the level(s) of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the SMR code as follows:

(a) Third Position. The maintenance code entered in the third position tells you the lowest maintenance level authorized to remove, replace, and use an item. The maintenance code entered in the third position will indicate authorization to the following levels of maintenance.

<u>Maintenance Code</u>	<u>Application/Explanation</u>
C	Crew or operator maintenance done within unit/AVUM maintenance.
O	Unit level/AVUM maintenance can remove, replace, and use the item.
F	Direct support/AVIM maintenance can remove, replace, and use the item.
H	General support maintenance can remove, replace, and use the item.
L	Specialized repair activity can remove, replace, and use the item.
D	Depot can remove, replace, and use the item.

(b) Fourth Position. The maintenance code entered in the fourth position tells you whether or not the item is to be repaired and identifies the lowest maintenance level with the capability to do complete repair (perform all authorized repair functions).

NOTE

Some limited repair may be done on the item at a lower level of maintenance, if authorized by the Maintenance Allocation Chart (MAC) and SMR codes.

This position will contain one of the following maintenance codes:

<u>Maintenance Code</u>	<u>Application/Explanation</u>
O	Unit/AVUM is the lowest level that can do complete repair of the item.
F	Direct support/AVIM is the lowest level that can do complete repair of the item.
H	General support is the lowest level that can do complete repair of the item.

3. **Explanation of Columns (Sections II and III). - (Continued)**

- L Specialized repair activity is the lowest level that can do complete repair of the item.
- D Depot is the lowest level than can do complete repair of the item.
- Z Nonrepairable. No repair is authorized.
- B No repair is authorized. No parts or special tools are authorized for maintenance of "B" coded item. However, the item may be reconditioned by adjusting, lubricating, etc., at the user level.

(3) **Recoverability Code.** Recoverability codes are assigned to items to indicate the disposition action on unserviceable items. The recoverability code is shown in the fifth position of the SMR code as follows:

<u>Recoverability Code</u>	<u>Application/Explanation</u>
Z	Nonrepairable item. When unserviceable, condemn and dispose of the item at the level of maintenance shown in the 3 rd position of SMR code.
O	Repairable item. When uneconomically repairable, condemn and dispose of the item at the unit/AVUM level.
F	Repairable item. When uneconomically repairable, condemn and dispose of the item at the direct support/AVIM level.
H	Repairable item. When uneconomically repairable, condemn and dispose of the item at the general support level.
D	Repairable item. When beyond lower level repair capability, return to depot. Condemnation and disposal of item are not authorized below depot level.
L	Repairable item. Condemnation and disposal not authorized below Specialized Repair Activity (SRA).
A	Item requires special handling or condemnation procedures because of specific reasons (such as precious metal content, high dollar value, critical material, or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c. **CAGE (Column (3)).** The Commercial and Government Entity Code (CAGEC) is a five-digit code which is used to identify the manufacturer, distributor, or Government agency/activity that supplies the item.

d. **PART NUMBER (Column (4)).** Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When you use an NSN to requisition an item, the item you receive may have a different P/N from the number listed.

e. **DESCRIPTION AND USABLE ON CODE (UOC) (Column (5)).** This column includes the following information:

3. Explanation of Columns (Sections II and III). - (Continued)

- (1) The federal item name, and when required, a minimum description to identify the item.
 - (2) Items that are included in kits and sets are listed below the name of the kit or set.
 - (3) Spare/repair parts that make up an assembled item are listed immediately following the assembled item line entry.
 - (4) P/Ns for bulk materials are referenced in this column in the line item entry for the item to be manufactured or fabricated.
 - (5) When the item is not used with all serial numbers of the same model, the effective serial numbers are shown on the last line(s) of the description (before UOC).
 - (6) The UOC, when applicable (see paragraph 5, Special Information).
 - (7) In the Special Tools List section, the Basis of Issue (BOI) appears as the last line(s) in the entry for each special tool, special TMDE, and other special support equipment. When density of equipments supported exceeds density spread indicated in the BOI, the total authorization is increased proportionately.
 - (8) The statement END OF FIGURE appears just below the last item description in column (5) for a given figure in both the repair parts list (Section II) and special tools list (Section III).
- f. QTY (Column (6)). The QTY (quantity per figure) column indicates the quantity of the item used in the breakout shown on the illustration/figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column instead of a quantity indicates that the quantity is variable and quantity may change from application to application.

4. Explanation of Cross Reference Indexes and Columns (Section IV).

a. National Stock Number (NSN) Index.

- (1) STOCK NUMBER Column. This column lists the NSN in National Item Identification Number (NIIN) sequence. The NIIN consists of the last nine digits of the NSN.

NSN
(e.g., 5385-01-574-1476)
NIIN

When using this column to locate an item, ignore the first four digits of the NSN. However, the complete NSN should be used when ordering items by stock number.

- (2) FIG. Column. This column lists the number of the figure where the item is identified/located. The figures are in numerical order in the repair parts list (Section II) and special tools list (Section III).

- (3) ITEM Column. The item number identifies the item associated with the figure listed in the adjacent FIG. Column. This item is also identified by the NSN listed on the same line.

b. Part Number (P/N) Index. P/Ns in this index are listed in ascending alphanumeric sequence (vertical arrangement of letter and number combinations which places the first letter or digit of each group in order A through Z, followed by the numbers 0 through 9 and each following letter or digit in like order).

- (1) CAGEC Column. The Commercial and Government Entity Code (CAGEC) is a 5-digit numeric code used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

- (2) PART NUMBER Column. Indicates the P/N assigned to the item.

- (3) STOCK NUMBER Column. This column lists the NSN for the item.

4. **Explanation of Cross Reference Indexes and Columns (Section IV). - (Continued)**

(4) FIG. Column. This column lists the number of the figure where the item is identified/located in the repair parts list (Section II) and special tools list (Section III).

(5) ITEM Column. The item number is the number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

c. Figure Number and Item Number Indexes.

(1) FIG. Column. This column lists the number of the figure where the item is identified/located in the repair parts list (Section II) and special tools list (Section III).

(2) ITEM Column. The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

(3) STOCK NUMBER Column. This column lists the NSN for the item.

(4) CAGEC Column. The Commercial and Government Entity Code (CAGEC) is used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

(5) PART NUMBER Column. Indicates the P/N assigned to the item.

5. **Special Information.**

a. USABLE ON CODE (UOC). The UOC appears in the lower left corner of the Description Column heading. Usable on codes are shown as "UOC: " in the Description Column (justified left) on the first line under the applicable item/nomenclature. Uncoded items are applicable to all models. Identifications of the UOC used in this RPSTL are:

<u>Code</u>	<u>Used On</u>
EMK	15kW, 50/60 Hz, TQG Set, Model MEP-804A
86Q	15kW, 50/60 Hz, TQG Set, Model MEP-804B
YNN	15kW, 400 Hz, TQG Set, Model MEP-814A
86R	15kW, 400 Hz, TQG Set, Model MEP-814B

b. Fabrication Instructions. Bulk materials required to manufacture items are listed in the bulk material functional group of this RPSTL. Part numbers for bulk materials are also referenced in the Description column of the line item entry for the item to be manufactured/fabricated. Detailed fabrication instructions for items source coded to be manufactured or fabricated are found in TM 9-6115-643-24.

c. Index Numbers. Items which have the word BULK in the figure column will have an index number shown in the item number column. This index number is a cross reference between the NSN / P/N index and the bulk materials list in Section II.

d. Assembly Instructions. Detailed assembly instructions for items source coded to be assembled from component spare/repair parts are found in TM 9-6115-643-24. Items that make up the assembly are listed immediately following the assembly item entry or reference is made to an applicable figure.

e. Kits. Line item entries for repair parts kits appear throughout Section II.

5. Special Information. - (Continued)

f. Associated Publications. The publication(s) listed below pertain to the 15kW TQG Set, Model MEP-804A/MEP-804B and MEP-814A/MEP-814B, and its components.

<u>Publication</u>	<u>Short Title</u>
LO 9-6115-643-12	Lubrication Order, 15kW TQG Set
TM 9-6115-643-10	Operator's Manual, 15kW TQG Set
TM 9-6115-643-24	Maintenance Manual, 15kW TQG Set
TM 9-2815-254-24	Maintenance Manual, Diesel Engine, Model No. C-240PW-28
TM 9-2815-254-24P	RPSTL, Diesel Engine, Model No. C-240PW-28
TM 9-2815-538-24&P	Maintenance Manual with RPSTL, Diesel Engine, Model No. 4TNV84T-DFM

6. How to Locate Repair Parts.

a. When NSNs or P/Ns Are Not Known.

(1) First. Using the table of contents, determine the assembly group or subassembly group to which the item belongs. This is necessary since figures are prepared for assembly groups and subassembly groups, and lists are divided into the same groups.

(2) Second. Find the figure covering the assembly group or subassembly group to which the item belongs.

(3) Third. Identify the item on the figure and use the Figure and Item Number Index to find the NSN, if assigned.

b. When NSNs Are Known.

(1) First. If you have the NSN, look in the STOCK NUMBER column of the NSN Index. The NSN is arranged in NIIN sequence. Note the figure and item number next to the NSN.

(2) Second. Turn to the figure and locate the item number. Verify that the item is the one you are looking for.

c. When P/Ns Are Known.

(1) First. If you have the P/N and not the NSN, look in the PART NUMBER column of the P/N Index. Identify the figure and item number.

(2) Second. Look up the item on the figure in the applicable repair parts list.

7. Abbreviations.

(Abbreviations must be applicable to specific RPSTL and not listed in MIL-STD-12.)

<u>Abbreviations</u>	<u>Explanation</u>
AVIM	Aviation Intermediate Maintenance
AVUM	Aviation Unit Maintenance
BOI	Basis of Issue
CAGEC	Commercial and Government Entity Code

7. **Abbreviations.** - (Continued)

<u>Abbreviations</u>	<u>Explanation</u>
DS	Direct Support
GS	General Support
MAC	Maintenance Allocation Chart
NIIN	National Item Identification Number (consists of the last 9-digits of the NSN)
NSN	National Stock Number
RPSTL	Repair Parts and Special Tools List
SMR	Source, Maintenance and Recoverability Code
SRA	Specialized Repair Activity
TMDE	Test, Measurement and Diagnostic Equipment
UOC	Usable on Code

SECTION II. REPAIR PARTS LIST

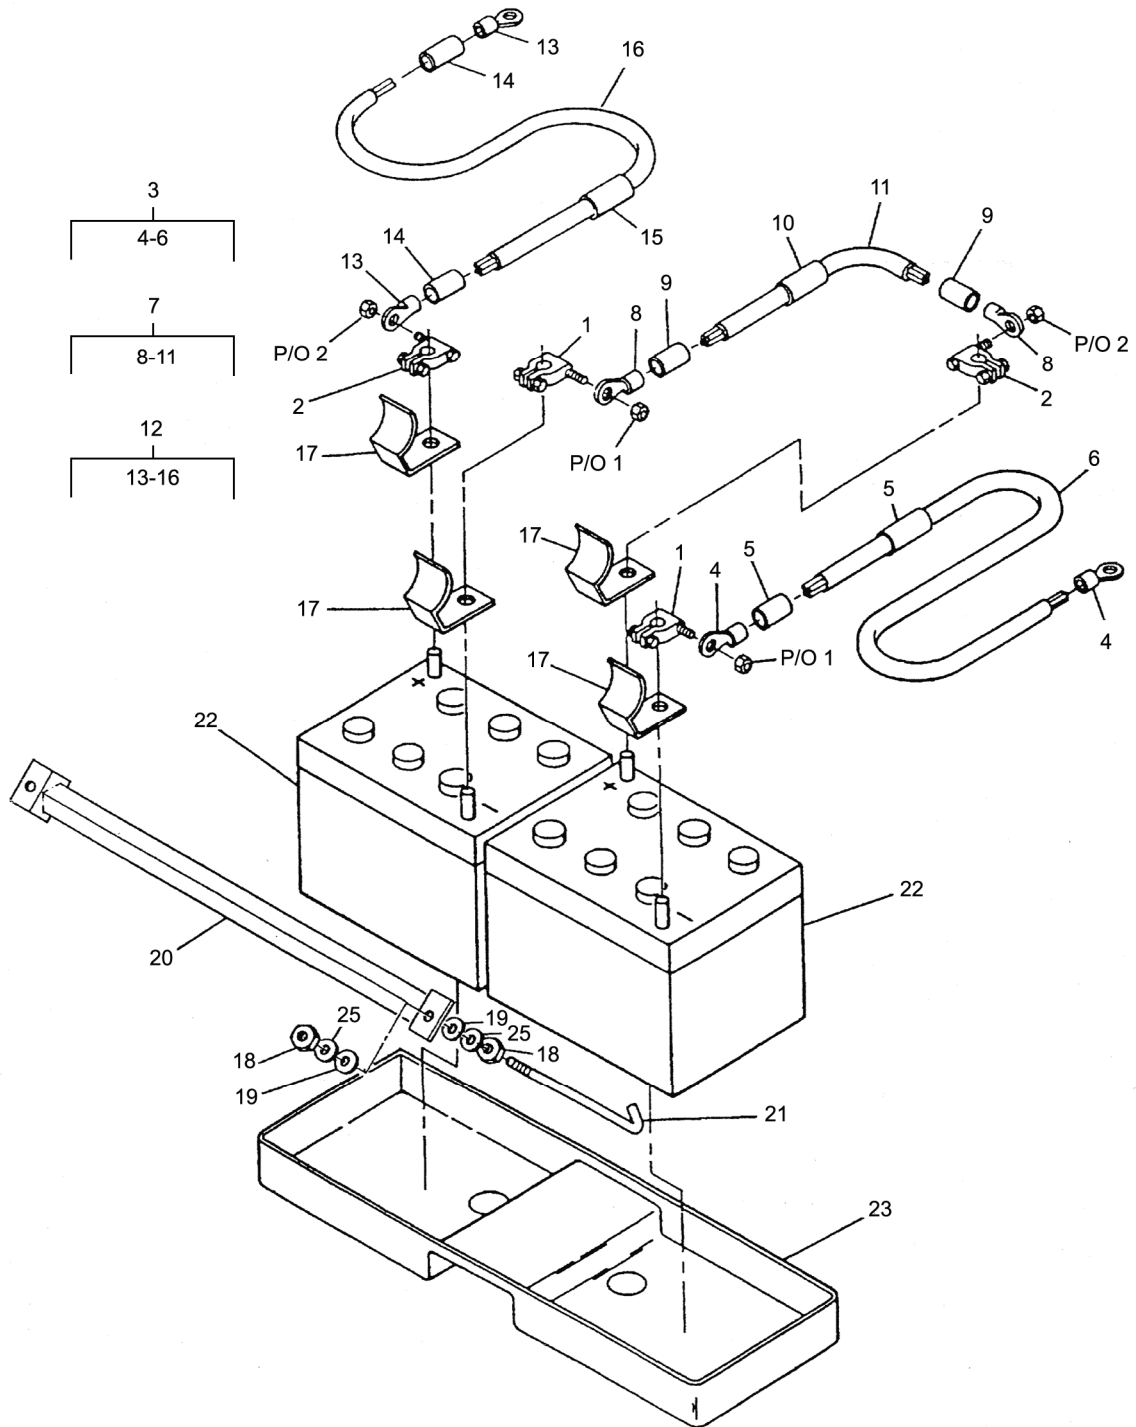


Figure 1. Batteries and Cables (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

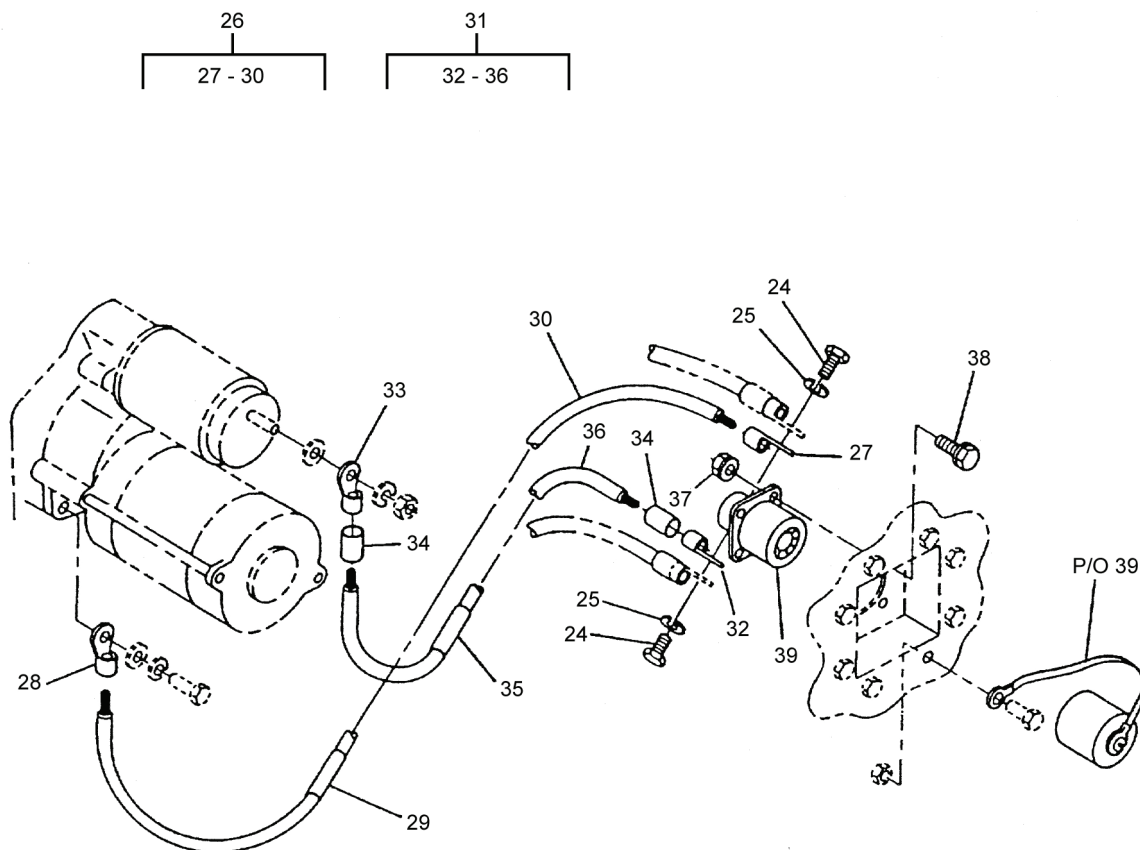


Figure 1. Batteries and Cables (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
ARMY	AIR FORCE	NAVY	USMC						
							GROUP 01 - D.C ELECTRICAL SYSTEM		
							FIG. 1 BATTERIES AND CABLES		
1	PAOZZ	PAOZA			58536	AA-52425-2	.ADAPTER, BATTERY TER NEGATIVE	2	
2	PAOZZ	PAOZZ			58536	A52425-1	.ADAPTER, BATTERY TER POSITIVE	2	
3	AOOOO	AOO			30554	88-22123	.CABLE, BATTERY	1	
4	PAOZZ	PAOZZ			30554	88-22119-14	..TERMINAL, LUG	2	
5	MOOZZ	MOO			30554	88-22123-3	..INSULATION, SLEEVING MAKE FROM P/N M23053/ 5-110-9 (81349), AS REQUIRED	2	
6	MOOZZ	MOO			30554	88-22123-1	..WIRE, ELECTRIC MAKE FROM P/N J1127SGR1AWG BLK (81343), 18.0 INCHES REQUIRED	1	
7	AOOOO	AOO			30554	88-22179	.LEAD, STORAGE, BATTERY	1	
8	PAOZZ	PAOZZ			30554	88-22119-14	..TERMINAL, LUG	2	
9	MOOZZ	MOO			30554	88-22179-3	..INSULATION, SLEEVING MAKE FROM P/N M23053/ 5-110-2 (81349), AS REQUIRED	2	
10	MOOZZ	MOO			30554	88-22179-4	..INSULATION, SLEEVING MAKE FROM P/N M23053/5- 110-9 (81349), AS REQUIRED	1	
11	MOOZZ	MOO			30554	88-22179-1	..WIRE, ELECTRIC MAKE FROM P/N J1127SGR1AWG BLK (81343), 14.0 INCHES REQUIRED	1	
12	AOOOO	AOO			30554	88-22310	.BATTERY, CABLE	1	
13	PAOZZ	PAOZZ			30554	88-22119-14	..TERMINAL, LUG	2	
14	MOOZZ	MOO			30554	88-22310-3	..INSULATION, SLEEVING MAKE FROM P/N M23053/ 5-110-2 (81349), AS REQUIRED	2	
15	MOOZZ	MOO			30554	88-22310-4	..INSULATION, SLEEVING MAKE FROM P/N M23053/5- 110-9 (81349), AS REQUIRED	1	
16	MOOZZ	MOO			30554	88-22310-1	..WIRE, ELECTRIC MAKE FROM P/N J1127SGR1AWGBLK (81343), 29.0 INCHES REQUIRED	1	
17	PAOZZ	PAOZZ			30554	88-20188	.COVER, BATTERY TERMI	4	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a.	b.	c.	d.					
18	PAOZZ	PAOZZ			30554	13218E0320-293	.NUT, PLAIN, HEX	4	
19	PAOZZ	PAOZZ			96906	MS51412-7	.WASHER, FLAT	4	
20	XDOZZ	XB			30554	88-21684	.BATTERY HOLD DOWN ASSY	1	
21	PAOZZ	PAOZZ			30554	88-21685	.BOLT, HOOK	2	
22	PAOZA	PAOZA			19207	6TMF/TYPEI	.BATTERY, STORAGE	2	
22	PAOZA	PAOZA			30554	88-22800	.BATTERY	2	
23	XDOZZ	XB			30554	88-21683	.TRAY, BATTERY	1	
24	PAOZZ	PAOZZ			80204	B1821BH038F063N	.SCREW, CAP, HEX HEAD	2	
25	PAOZZ	PAOZZ			80205	MS35338-65	.WASHER, LOCK	6	
26	AOOOO	AOO			30554	88-22309	.CABLE ASSY, BATTERY	1	
27	PAOZZ	PAOZZ			30554	88-22119-14	..TERMINAL, LUG	1	
28	PAOZZ	PAOZZ			30554	88-22119-22	..TERMINAL, LUG	1	
29	MOOZZ	MOO			30554	88-22309-3	..INSULATION, SLEEVING MAKE FROM P/N M23053/5-110-9 (81349), AS REQUIRED	1	
30	MOOZZ	MOO			30554	88-22309-1	..WIRE, ELECTRIC MAKE FROM P/N J1127SGR1AWGBLK (81343), 30.0 INCHES REQUIRED	1	
31	AOOOO	AOO			30554	88-22311	.CABLE ASSY, BATTERY	1	
32	PAOZZ	PAOZZ			30554	88-22119-14	..TERMINAL, LUG	1	
33	PAOZZ	PAOZZ			30554	88-22119-11	..TERMINAL, LUG	1	
34	MOOZZ	MOO			30554	88-22311-4	..INSULATION, SLEEVING MAKE FROM P/N M23053/5-110-2 (81349), AS REQUIRED	2	
35	MOOZZ	MOO			30554	88-22311-5	..INSULATION, SLEEVING MAKE FROM P/N M23053/5-110-9 (81349), AS REQUIRED	1	
36	MOOZZ	MOO			30554	88-22311-1	..WIRE, ELECTRIC MAKE FROM P/N J1127SGR1AWGBLK (81343), 29.0 INCHES REQUIRED	1	
37	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	4	
38	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	4	
39	PAOZZ	PAOZZ			19207	11682345	.CONNECTOR, RECEPTACLE	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

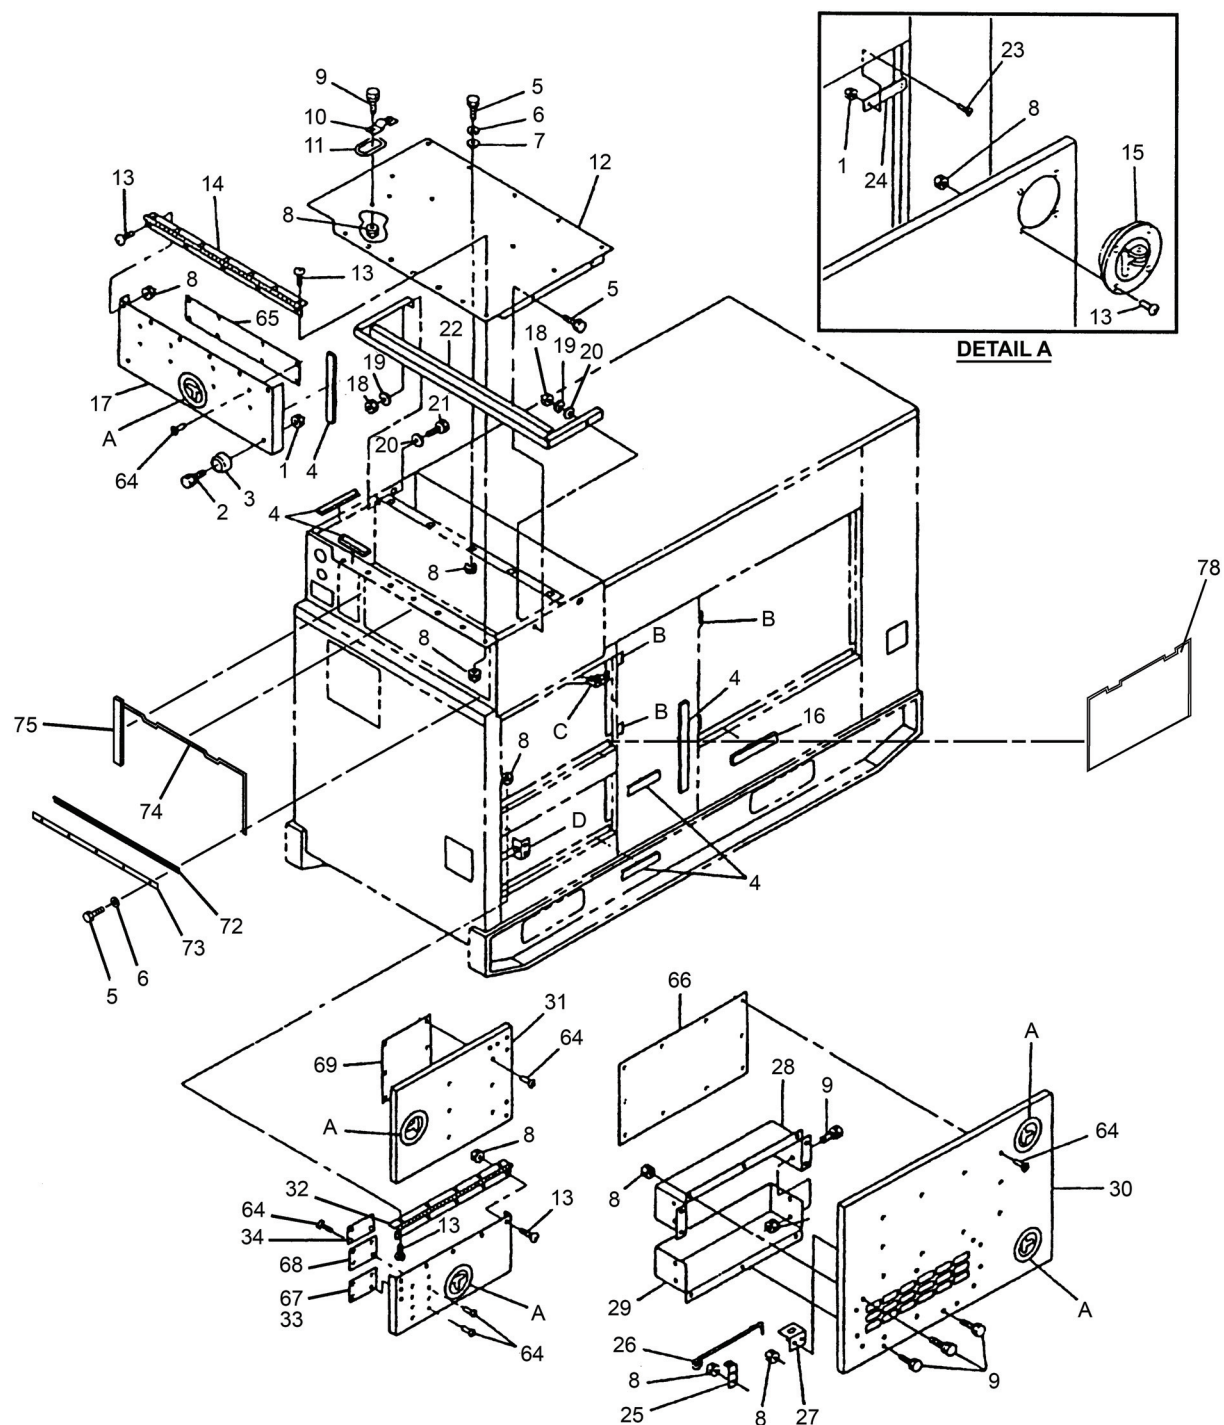


Figure 2. Access Doors and Covers (Sheet 1 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

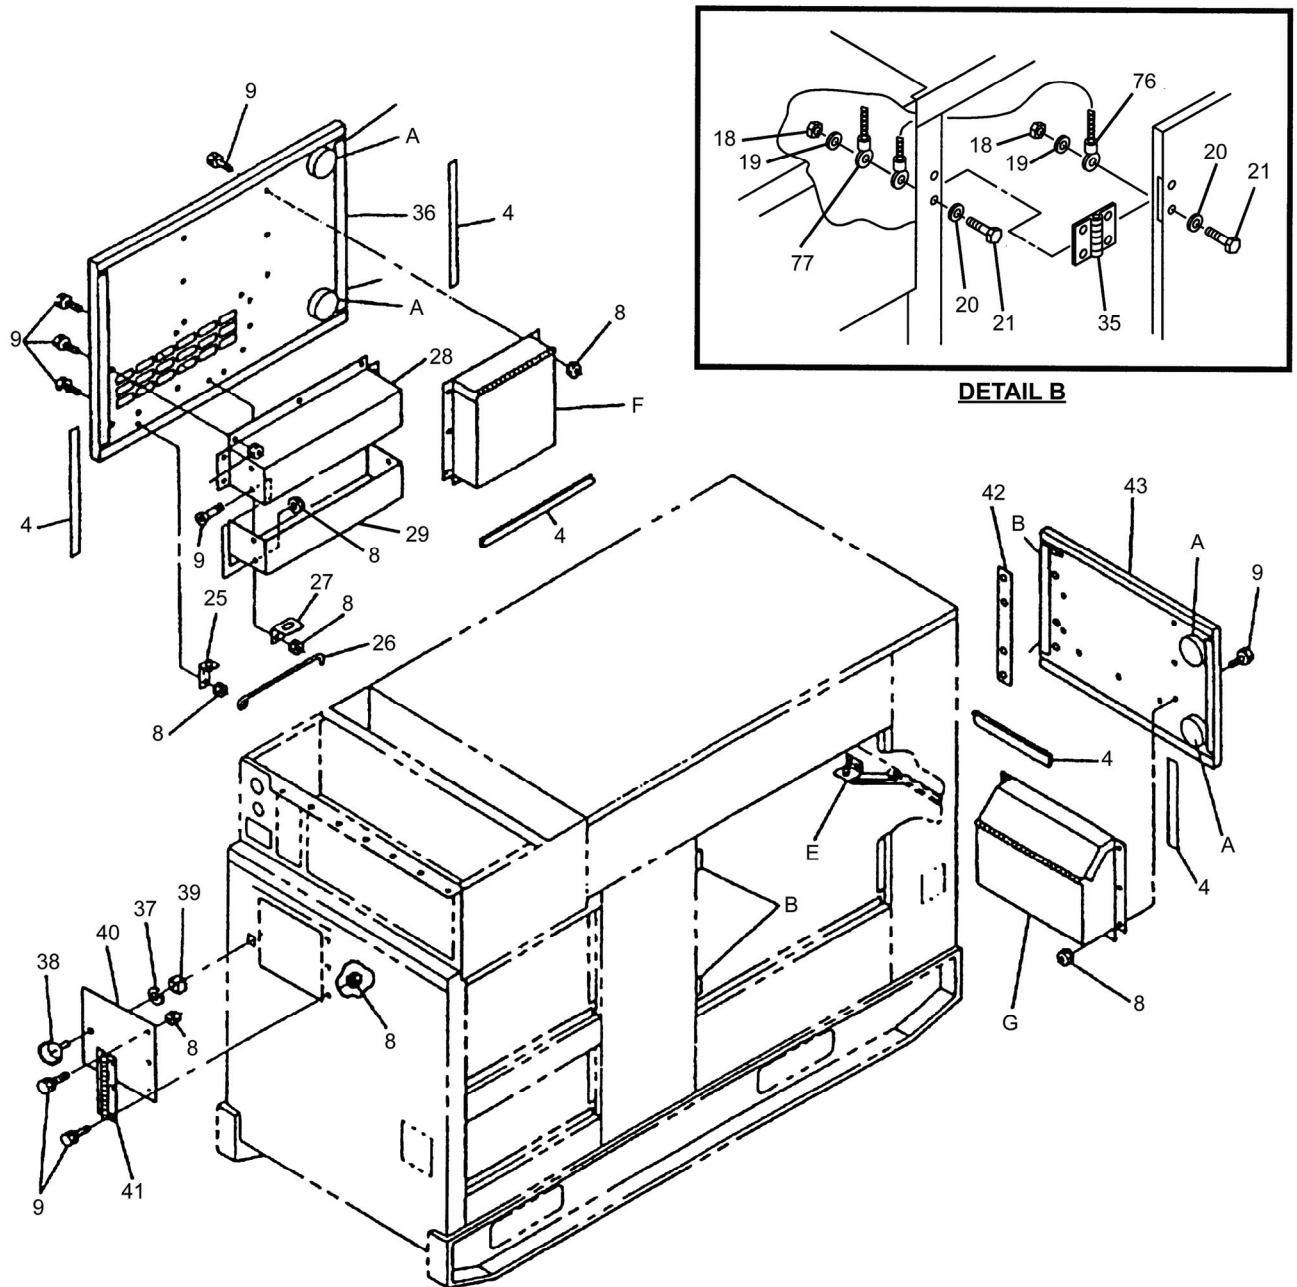


Figure 2. Access Doors and Covers (Sheet 2 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

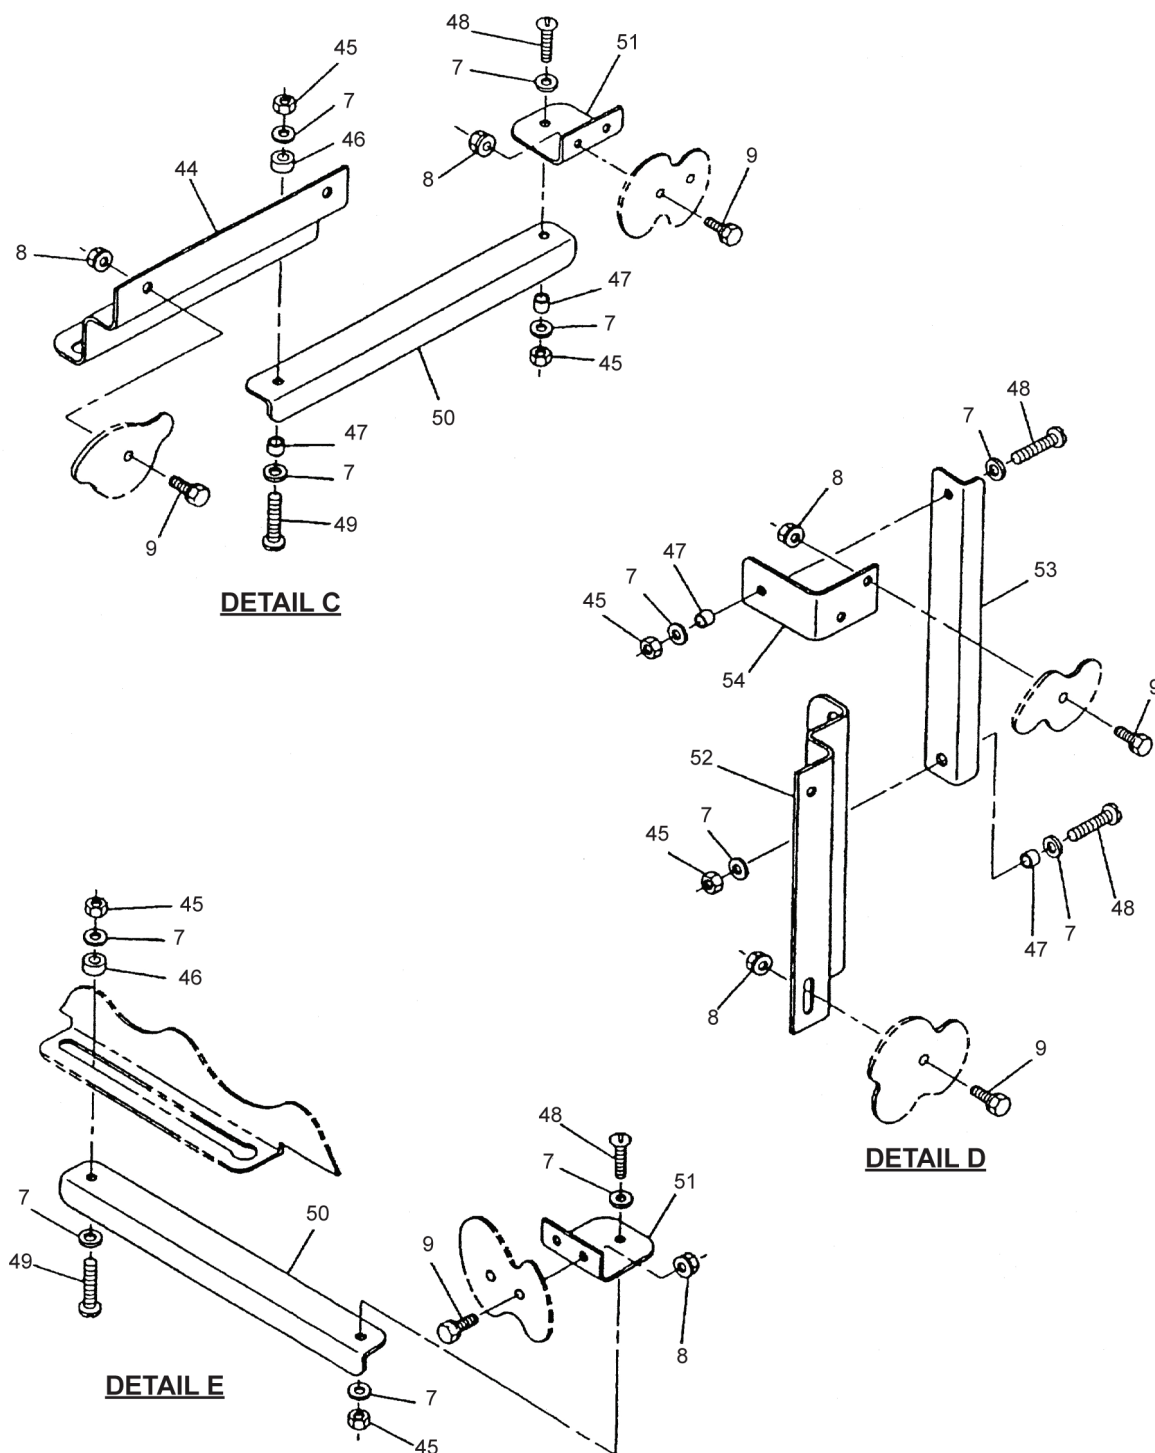


Figure 2. Access Doors and Covers (Sheet 3 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

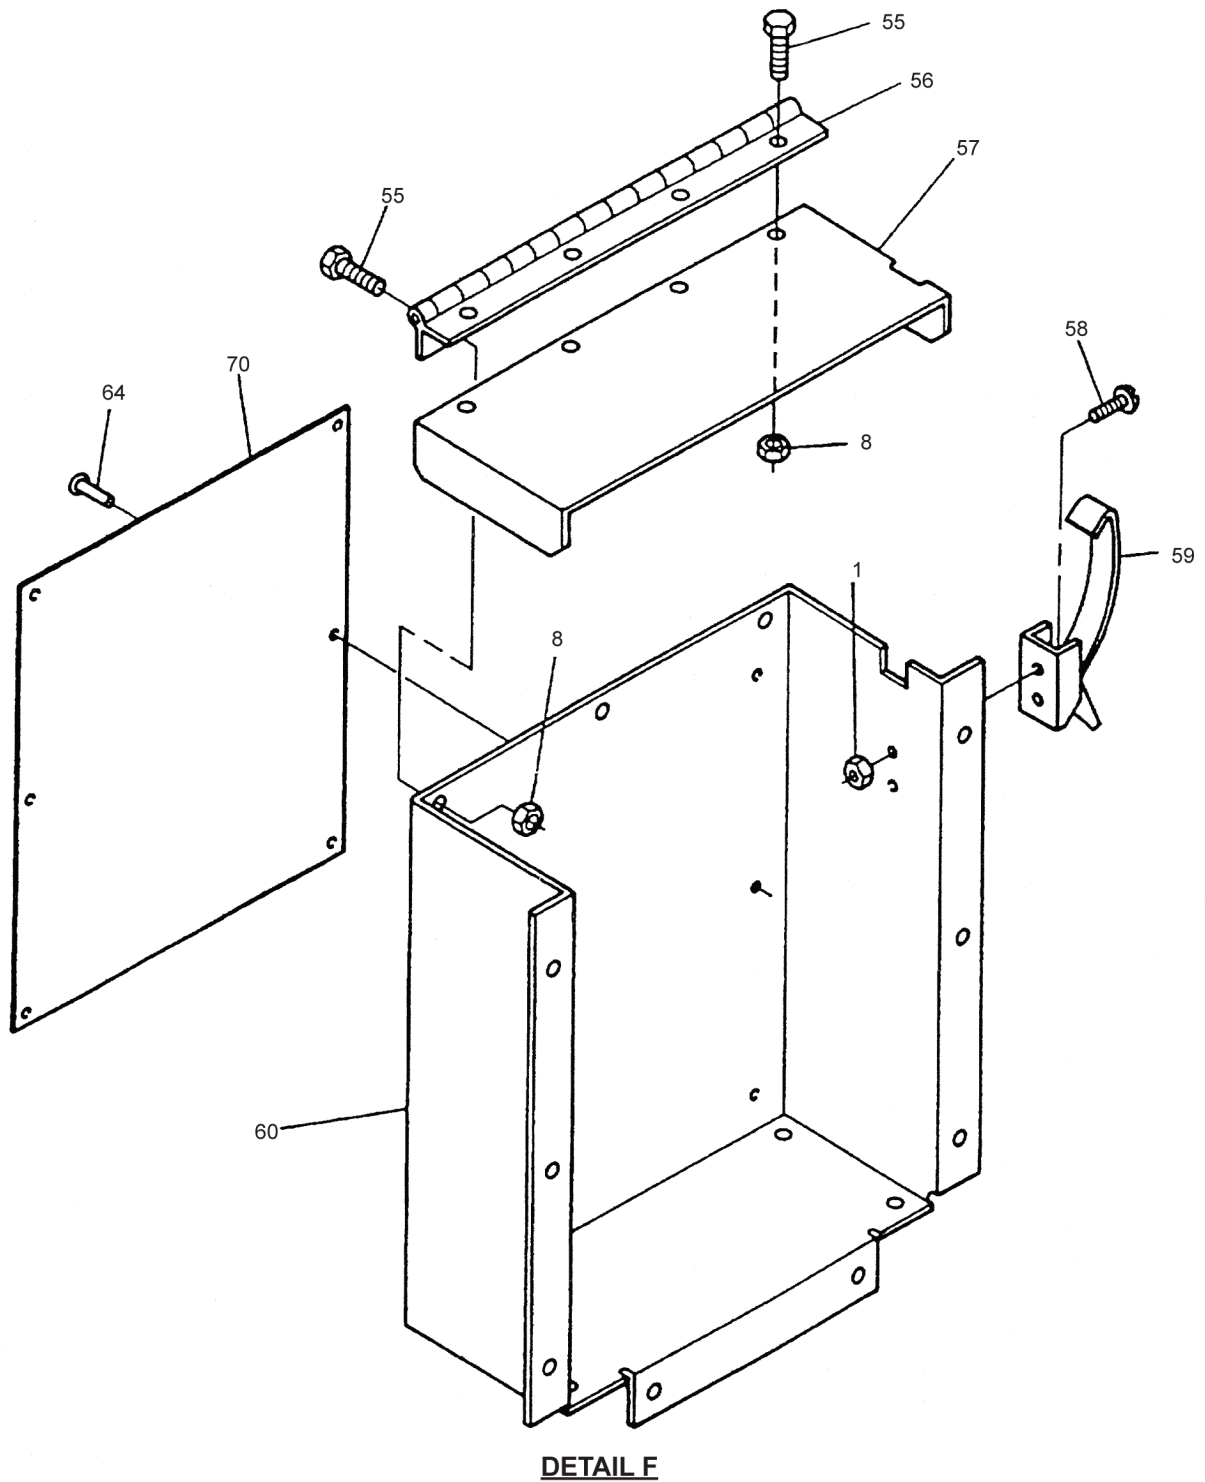


Figure 2. Access Doors and Covers (Sheet 4 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

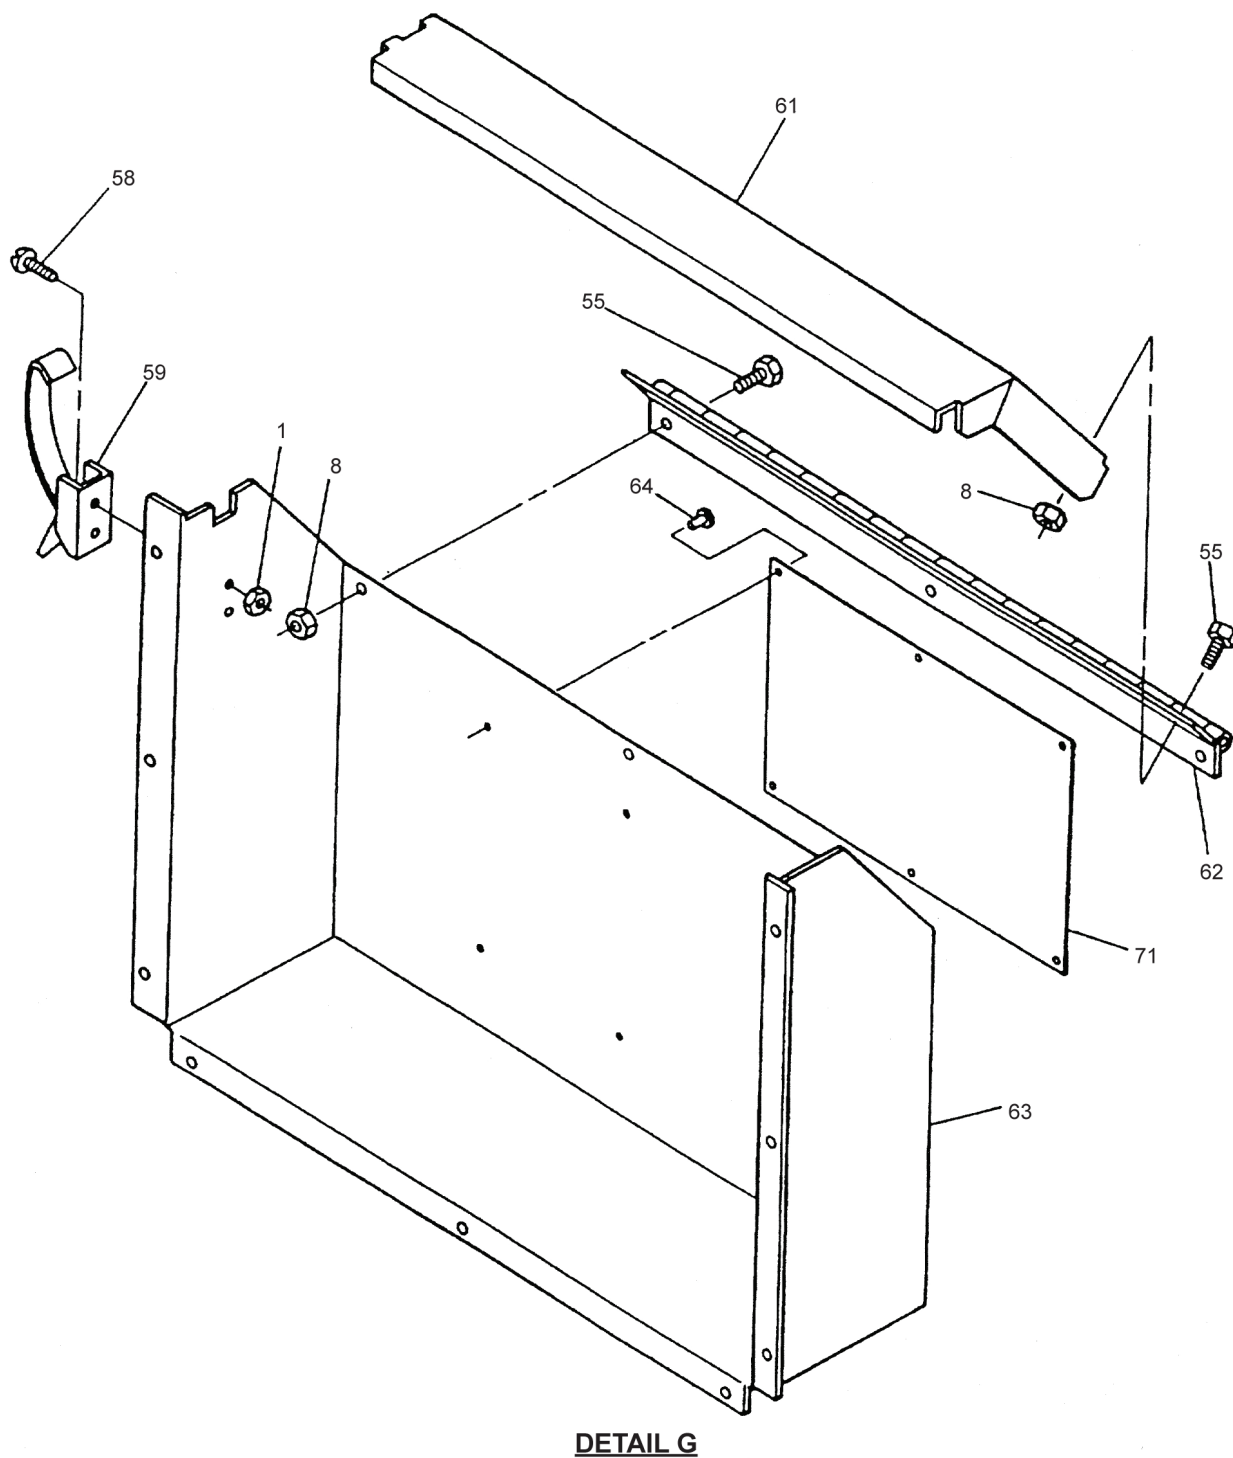


Figure 2. Access Doors and Covers (Sheet 5 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7) USMC QTY PER EQUIP
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	
GROUP 02 - HOUSING									
FIG. 2 ACCESS DOORS AND COVERS									
1	PAOZZ	PAOZZ			30554	69-561-2	.NUT, PLAIN, ASSEMBLED	22	
2	PAOZZ	PAOZZ			30554	69-662-20	.SCREW, ASSEMBLED	2	
3	PAOZZ	PAOZZ			30554	88-20278	.BUMPER, DOOR	2	
4	MOOZZ	MOO			30554	88-21604-295	.SEAL, DOOR MAKE FROM P/N 88-22705 (30554), AS REQUIRED UOC: EMK	1	
4	MOOZZ	MOO			30554	97-24604-295	.SEAL, DOOR MAKE FROM P/N 88-22705 (30554), AS REQUIRED UOC: 86Q	1	
4	MOOZZ	MOO			30554	88-21605-295	.SEAL, DOOR MAKE FROM P/N 88-22705 (30554), AS REQUIRED UOC: YNN	1	
4	MOOZZ	MOO			30554	97-24605-295	.SEAL, DOOR MAKE FROM P/N 88-22705 (30554), AS REQUIRED UOC: 86R	1	
5	PAOZZ	PAOZZ			30554	88-20260-23	.SCREW, CAP, HEX HEAD	16	
6	PAOZZ	PAOZZ			80205	MS35338-62	.WASHER, LOCK	12	
7	PAOZZ	PAOZZ			96906	MS51412-2	.WASHER, FLAT	24	
8	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	115	
9	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	72	
10	XDOZZ	XB			30554	88-20277	.RETAINER, DOOR RING	1	
11	XDOZZ	XB			30554	88-20276	.RING, DOOR	1	
12	XDOZZ	XB			30554	88-21870	.TOP, CONTROL BOX	1	
13	PAOZZ	PAOZZ			30554	88-22793-4	.SCREW, MACHINE	58	
14	MOOZZ	MOO			30554	88-21877	.HINGE, DOOR, CONTROL MAKE FROM P/N AA07060408 (03007), 27.75 INCHES REQD	1	
15	PAOZZ	PAOZZ			30554	88-21099	.LATCH, TEE HANDLE	9	
16	MOOZZ	MOO			30554	88-21604-356	.SEAL, DOOR MAKE FROM P/N 88-22708 (30554), 74.8 INCHES REQUIRED UOC: EMK	1	
16	MOOZZ	MOO			30554	97-24604-356	.SEAL, DOOR MAKE FROM P/N 88-22708 (30554), 74.8 INCHES REQUIRED UOC: 86Q	1	
16	MOOZZ	MOO			30554	88-21605-356	.SEAL, DOOR MAKE FROM P/N 88-22708 (30554), 74.8 INCHES REQUIRED UOC: YNN	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a.	b.	c.	d.					
16	MOOZZ	MOO			30554	97-24605-356	.SEAL, DOOR MAKE FROM P/N 88-22708 (30554), 74.8 INCHES REQUIRED UOC: 86R	1	
17	XDOZZ	XB			30554	88-21875	.DOOR, CONTROL BOX	1	
18	PAOZZ	PAOZZ			30554	88-22790-1	.NUT, PLAIN, HEX	34	
19	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	34	
20	PAOZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT	34	
21	PAOZZ	PAOZZ			30554	88-20260-31	.SCREW, HEX WASHERHEAD	34	
22	XDOZZ	XB			30554	88-22077	.STIFFENER ASSY, CON	1	
23	PAOZZ	PAOZZ			30554	88-22791-1	.SCREW, MACHINE	16	
24	XDOZZ	XB			30554	88-20123	.PLATE, STRIKER	8	
25	XDOZZ	XB			30554	88-22501	.BRACKET, HOLDING ROD	2	
26	XDOZZ	XB			30554	88-22472	.ROD, DOOR HOLDING	2	
27	XDOZZ	XB			30554	88-22500	.BRACKET, LATCH-HOLD	2	
28	XDOZZ	XB			30554	88-22088	.BAFFLE, UPPER	2	
29	XDOZZ	XB			30554	88-22089	.BAFFLE, LOWER	2	
30	XDOZZ	XB			30554	88-22070	.DOOR, RS	1	
31	XDOZZ	XB			30554	88-21585	.DOOR, OUTPUT BOX UOC: EMK, YNN	1	
31	XDOZZ	XB			30554	97-24138	.DOOR, OUTPUT BOX UOC: 86Q, 86R	1	
32	MOOZZ	MOO			30554	88-21820	.HINGE, DOOR, LOAD MAKE FROM P/N AA06060406 (03007), 21.26 INCHES REQUIRED	1	
33	XDOZZ	XB			30554	88-21771	.DOOR, ACCESS LOAD TER	1	
34	MDOZZ	MDO			30554	88-22738	.PLATE, IDENTIFICATION, SWITCH BOX RECEPTACLE	1	
35	PAOZZ	PAOZZ			30554	88-21098	.HINGE, BUTT	8	
36	XDOZZ	XB			30554	88-21890	.DOOR, ACCESS, LS	1	
37	PAOZZ	PAOZZ			30554	88-20052	.RETAINER	1	
38	PAOZZ	PAOZZ			30554	88-22626	.STUD, 1/4 TURN	1	
39	PAOZZ	PAOZZ			30554	88-20050	.RECEPTACLE, TURNLOCK	1	
40	XDOZZ	XB			30554	88-21732	.DOOR, ACCESS, AIR CL	1	
41	MOOZZ	MOO			30554	88-21733	.HINGE, DOOR, AIR CL MAKE FROM P/N AA06060406 (03007), 8.75 INCHES REQUIRED. REMOVE CENTER PIN, REVERSE	1	
42	XDOZZ	XB			30554	88-22666	.PLATE, SPACER, HINGE	1	
43	XDOZZ	XB			30554	88-22063	.DOOR, BATTERY COMPA	1	
44	XDOZZ	XB			30554	88-22478	.BRACKET, DOOR LINK	1	
45	PAOZZ	PAOZZ			30554	88-21930-4	.NUT, SELF-LOCKING, HEX	6	
46	XDOZZ	XB			30554	88-22483	.SPACER, SLEEVE	2	
47	XDOZZ	XB			30554	88-22482	.SPACER, RING	4	
48	PAOZZ	PAOZZ			96906	MS51493-2	.SCREW, MACHINE	4	
49	PAOZZ	PAOZZ			96906	MS51493-3	.SCREW, MACHINE	2	
50	XDOZZ	XB			30554	88-20461	.LINK, DOOR SUPPORT	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
51	XDOZZ	XB			30554	88-22479	.SUPPORT, DOOR LINK	2	
52	XDOZZ	XB			30554	88-22474	.BRACKET, DOOR SUPPORT	1	
53	XDOZZ	XB			30554	88-22476	.LINK, DOOR SUPPORT	1	
54	XDOZZ	XB			30554	88-22475	.ANGLE, DOOR SUPPORT	1	
55	PAOZZ	PAOZZ			30554	88-20260-20	.SCREW, HEX WASHERHEAD	14	
56	MOOZZ	MOO			30554	88-20014	.HINGE, DOCUMENT BOX	1	
57	XDOZZ	XB			30554	88-20013	.LID, DOCUMENT BOX	1	
58	PAOZZ	PAOZZ			30554	69-662-17	.SCREW, ASSEMBLED	4	
59	PAOZZ	PAOZZ			30554	88-20252	.LATCH, DRAW	2	
60	XDOZZ	XB			30554	88-21998	.BOX, DOCUMENT	1	
61	XDOZZ	XB			30554	88-21814	.LID, STORAGE BOX	1	
62	MOOZZ	MOO			30554	88-21815	.HINGE, STORAGE BOX	1	
63	XDOZZ	XB			30554	88-21813	.BOX, STORAGE	1	
64	PAOZZ	PAOZZ			81349	M24243/1A402	.RIVET, BLIND	46	
65	MDOZZ	MDO			30554	88-21635	.PLATE, IDENTIFICATION, OPERATING INSTRUCTIONS UOC: EMK	1	
65	MDOZZ	MDO			30554	88-22078	.PLATE, IDENTIFICATION, OPERATING INSTRUCTIONS UOC: YNN	1	
65	MDOZZ	MDO			30554	97-24053	.PLATE, IDENTIFICATION, OPERATING INSTRUCTIONS UOC: 86Q, 86R	1	
66	MDOZZ	MDO			30554	88-22211	.PLATE, IDENTIFICATION, WIRING DIAGRAM UOC: EMK, YNN	1	
66	MDOZZ	MDO			30554	97-24052	.PLATE, IDENTIFICATION, WIRING DIAGRAM UOC: 86Q, 86R	1	
67	MDOZZ	MDO			30554	88-20110	.PLATE, IDENTIFICATION, CAUTION, VOLTAGE CONNECTION	1	
68	MDOZZ	MDO			30554	88-20126	.PLATE, IDENTIFICATION, GROUNDING STUD	1	
69	MDOZZ	MDO			30554	88-22210	.PLATE, IDENTIFICATION, SCHEMATIC DIAGRAM UOC: EMK, YNN	1	
69	MDOZZ	MDO			30554	97-24051	.PLATE, IDENTIFICATION, SCHEMATIC DIAGRAM UOC: 86Q, 86R	1	
70	MDOZZ	MDO			30554	88-22480	.PLATE, IDENTIFICATION, FUEL SYSTEM DIAGRAM	1	
71	MDOZZ	MDO			30554	88-21603	.PLATE, IDENTIFICATION, INSTRUCTION, BATTERY CONNECTION	1	
72	PAOZZ	PAOZZ			30554	97-24124	.SEAL, EMI UOC: 86Q, 86R	1	
73	XDOZZ	XB			30554	97-24130	.BRACKET, RETAINING UOC: 86Q, 86R	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
74	PAOZZ	PAOZZ			30554	97-24137	.SEAL, EMI UOC: 86Q, 86R	1	
75	PAOZZ	PAOZZ			30554	97-24131	.SEAL, EMI UOC: 86Q, 86R	1	
76	PAOZZ	PAOZZ			30554	97-24128	.GROUND STRAP UOC: 86Q, 86R	2	
77	PAOZZ	PAOZZ			30554	97-24129	.GROUND STRAP UOC: 86Q, 86R	2	
78	PAOZZ	PAOZZ			30554	97-24132	.SEAL, EMI UOC: 86Q, 86R	AR	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

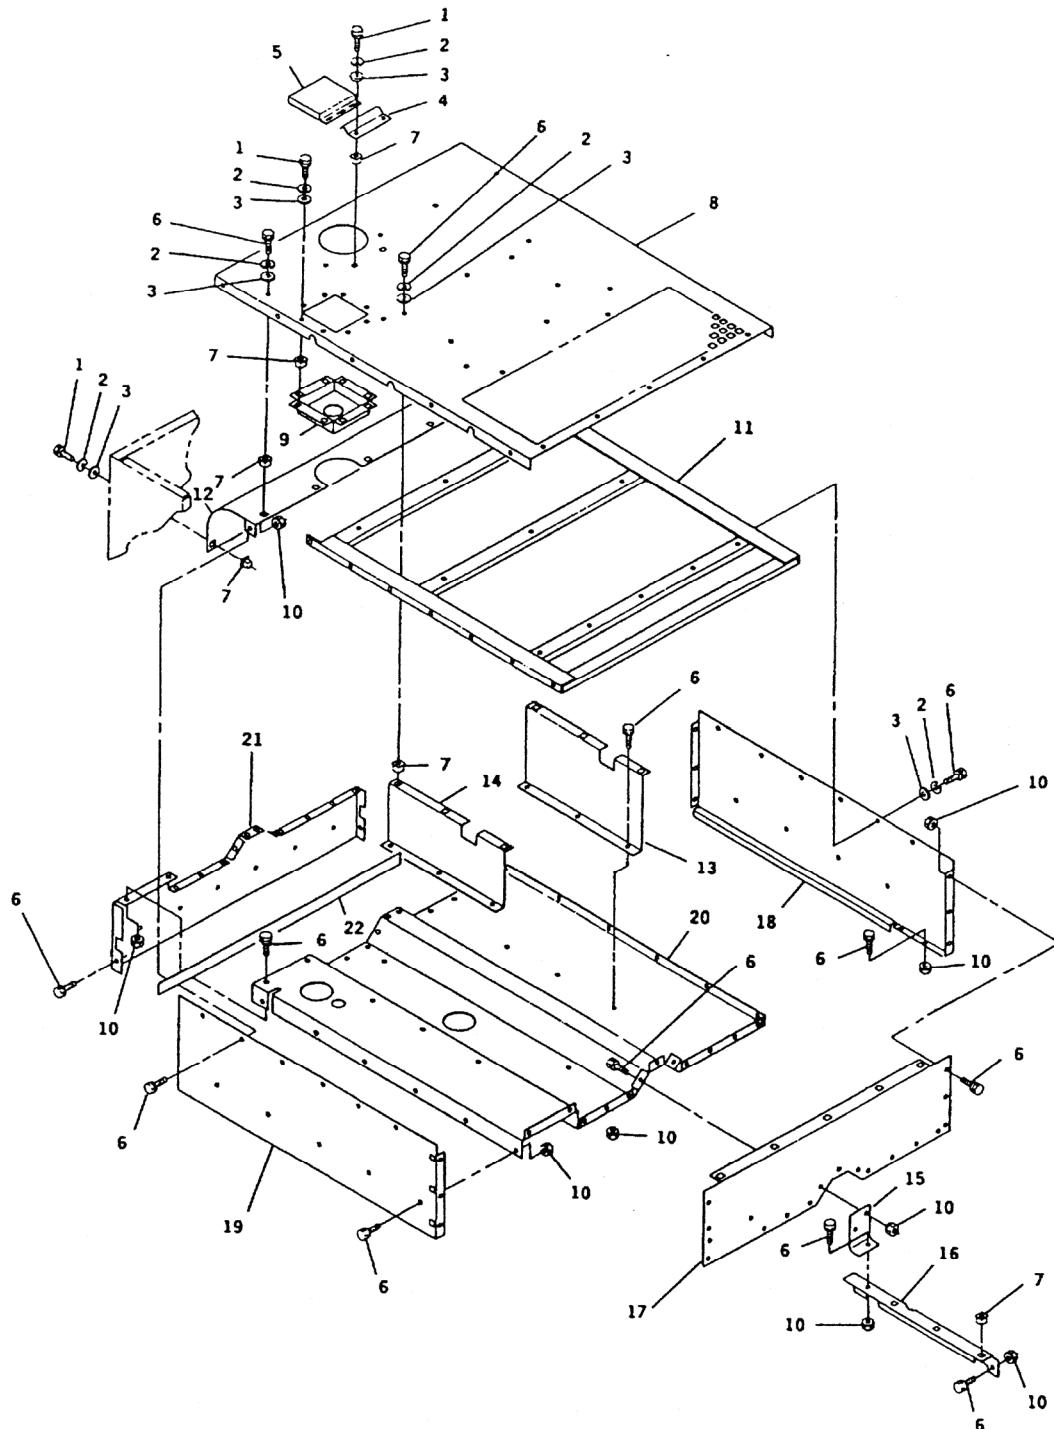


Figure 3. Front Housing Panels (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

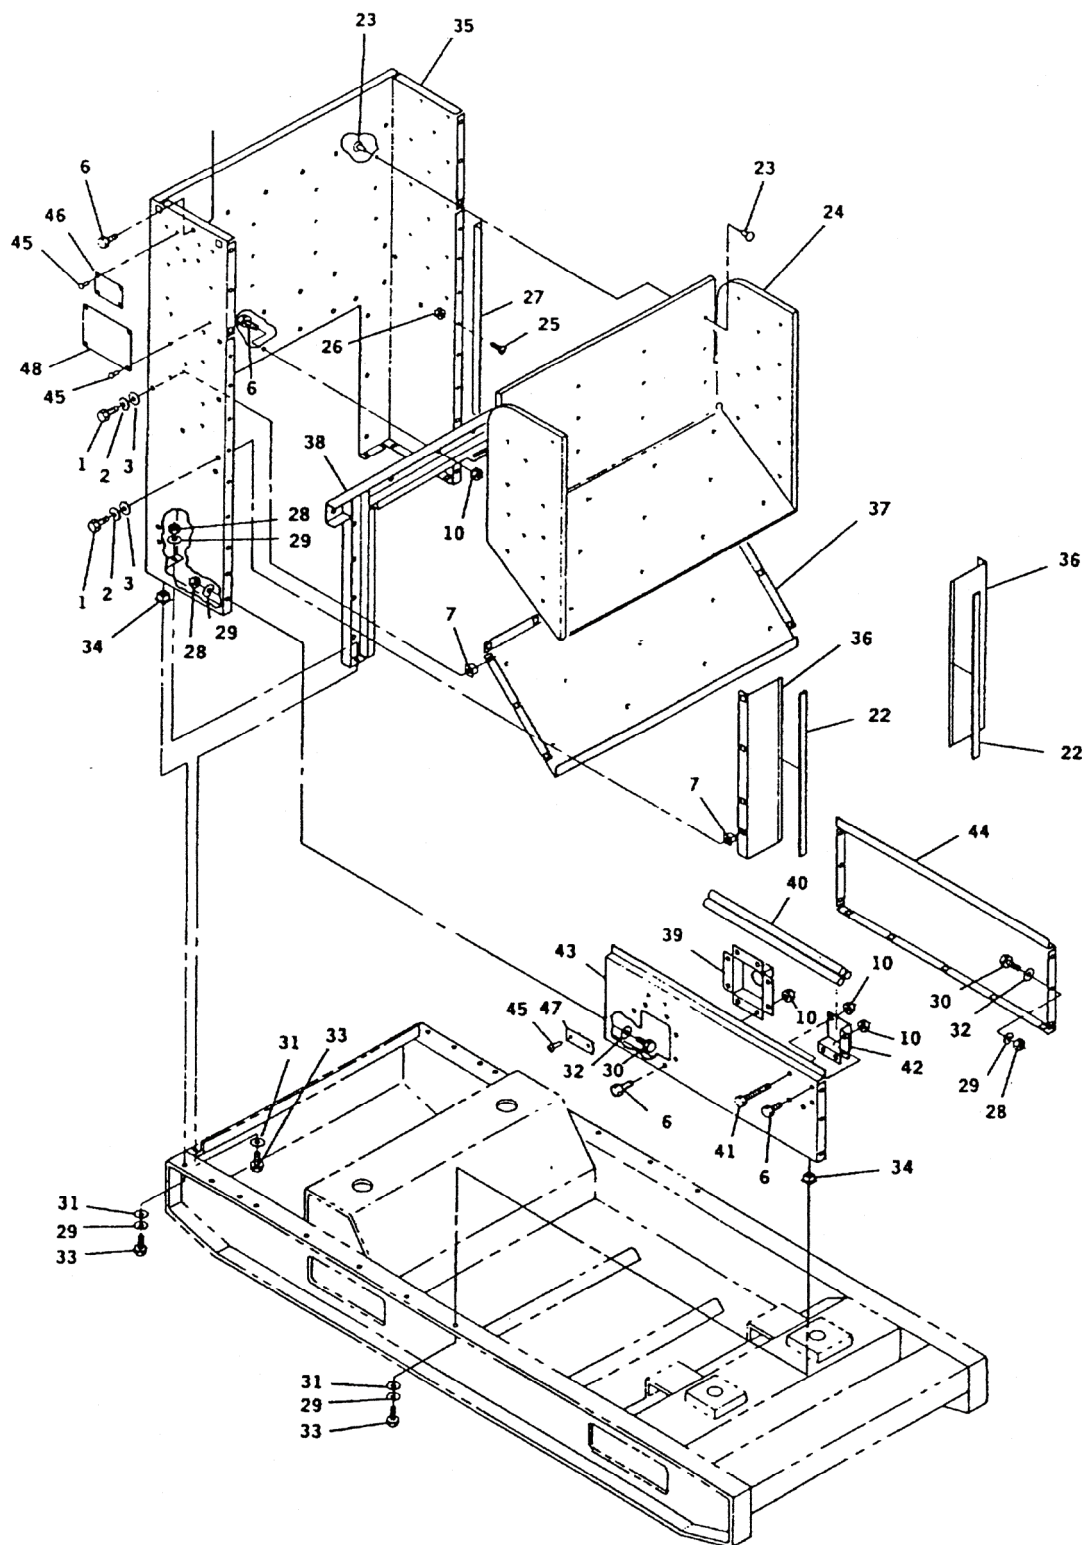


Figure 3. Front Housing Panels (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
GROUP 02 – HOUSING									
FIG. 3 FRONT HOUSING PANELS									
1	PAOZZ	PAOZZ			30554	88-20260-23	.SCREW, CAP, HEX HEAD	16	
2	PAOZZ	PAOZZ			80205	MS35338-62	.WASHER, LOCK	56	
3	PAOZZ	PAOZZ			96906	MS51412-2	.WASHER, FLAT	56	
4	XDOZZ	XB			30554	88-22430	.BRACKET, MOUNTING	1	
5	XDOZZ	XB			30554	88-22429	.COVER, EXHAUST	1	
6	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	138	
7	PAOZZ	PAOZZ			30554	88-21674-2	.NUT, CAGE	46	
8	XDOZZ	XB			30554	88-21598	.HOUSING, TOP	1	
9	XDOZZ	XB			30554	88-21988	.PANEL, FILL RADIATOR	1	
10	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	106	
11	XDOZZ	XB			30554	88-22116	.STIFFENER, ROOF	1	
12	XDOZZ	XB			30554	88-21962	.DEFLECTOR, AIR UPPER	1	
13	XDOZZ	XB			30554	88-21600	.CHANNEL, DUCT RIGHT SIDE	1	
14	XDOZZ	XB			30554	88-22513	.CHANNEL, DUCT LEFT SIDE	1	
15	XDOZZ	XB			30554	88-22528	.BRACKET, SUPPORT OU	1	
16	XDOZZ	XB			30554	88-22702	.ANGLE, SUPPORT	1	
17	XDOZZ	XB			30554	88-22510	.PANEL, DUCT FLOOR	1	
18	XDOZZ	XB			30554	88-21928	.PANEL, TOP RIGHT SIDE	1	
19	XDOZZ	XB			30554	88-21596	.PANEL, TOP LEFT SIDE	1	
20	XDOZZ	XB			30554	88-21601	.FLOOR, DUCT	1	
21	XDOZZ	XB			30554	88-22512	.PANEL, FRONT FLOOR	1	
22	MOOZZ	MOO			30554	88-21604-317	.SEAL, RUBBER MAKE FROM P/N MIL-R-6130 TY II GRA (81349), AS REQUIRED UOC: EMK	1	
22	MOOZZ	MOO			30554	97-24604-317	.SEAL, RUBBER MAKE FROM P/N MIL-R-6130 TY II GRA (81349), AS REQUIRED UOC: 86Q	1	
22	MOOZZ	MOO			30554	88-21605-317	.SEAL, RUBBER MAKE FROM P/N MIL-R-6130 TY II GRA (81349), AS REQUIRED UOC: YNN	1	
22	MOOZZ	MOO			30554	97-24605-317	.SEAL, RUBBER MAKE FROM P/N MIL-R-6130 TY II GRA (81349), AS REQUIRED UOC: 86R	1	
23	PAOZZ	PAOZZ			30554	88-20210	.CLIP, PANEL	92	
24	MOOZZ	MOO			30554	88-22595	.INSULATION, HOUSING, FR MAKE FROM P/N FF40JM02 (28818), 51 INCHES X 36	1	
25	PAOZZ	PAOZZ			80205	MS35190-253	.SCREW, MACHINE	12	
26	PAOZZ	PAOZZ			30554	88-21930-3	.NUT, SELF-LOCKING	12	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
27	XDOZZ	XB			30554	88-22667	.CHANNEL	2	
28	PAOZZ	PAOZZ			30554	88-22790-1	.NUT, PLAIN, HEX	14	
29	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	34	
30	PAOZZ	PAOZZ			30554	88-20260-31	.SCREW, HEX WASHERHEAD	12	
31	PAOZZ	PAOZZ			96906	MS51412-5	.WASHER, FLAT	18	
32	PAOZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT	16	
33	PAOZZ	PAOZZ			30554	88-20260-33	.SCREW, HEX WASHERHEAD	22	
34	PAOZZ	PAOZZ			30554	88-21674-3	.NUT, CAGE	20	
35	XDOZZ	XB			30554	88-21913	.HOUSING, FRONT	1	
36	XDOZZ	XB			30554	88-21694	.PANEL, RADIATOR	2	
37	XDOZZ	XB			30554	88-22051	.PANEL, AIR DEFLECTOR	1	
38	XDOZZ	XB			30554	88-22514	.CHANNEL, SUPPORT	1	
39	XDOZZ	XB			30554	88-21952	.BOX, SLAVE RECEPTAC	1	
40	XDOZZ	XB			58536	AA55804-3B 9FT	.ROD, GROUND	1	
41	PAOZZ	PAOZZ			80205	MS90725-15	.SCREW, CAP, HEX HEAD	2	
42	XDOZZ	XB			30554	88-21889	.SUPPORT, GROUND ROD	2	
43	XDOZZ	XB			30554	88-21590	.SILL, DOOR LEFT SIDE	1	
44	XDOZZ	XB			30554	88-22032	.SILL, DOOR RIGHT SIDE	1	
45	PAOZZ	PAOZZ			81349	M24243/1A402	.RIVET, BLIND	10	
46	MDOZZ	MDO			30554	88-20063-05	.PLATE, IDENTIFICATION UOC: EMK	1	
46	MDOZZ	MDO			30554	88-20063-06	.PLATE, IDENTIFICATION UOC: YNN	1	
46	MDOZZ	MDO			30554	97-24050-01	.PLATE, IDENTIFICATION UOC: 86Q	1	
46	MDOZZ	MDO			30554	97-24050-02	.PLATE, IDENTIFICATION UOC: 86R	1	
47	MDOZZ	MDO			30554	88-20075	.PLATE, IDENTIFICATION, SLAVE RECEPTACLE	1	
48	MDOZZ	MDO			30554	88-21821-01	.PLATE, IDENTIFICATION, SET RATING UOC: EMK, 86Q	1	
48	MDOZZ	MDO			30554	88-21821-02	.PLATE, IDENTIFICATION, SET RATING UOC: YNN, 86R	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

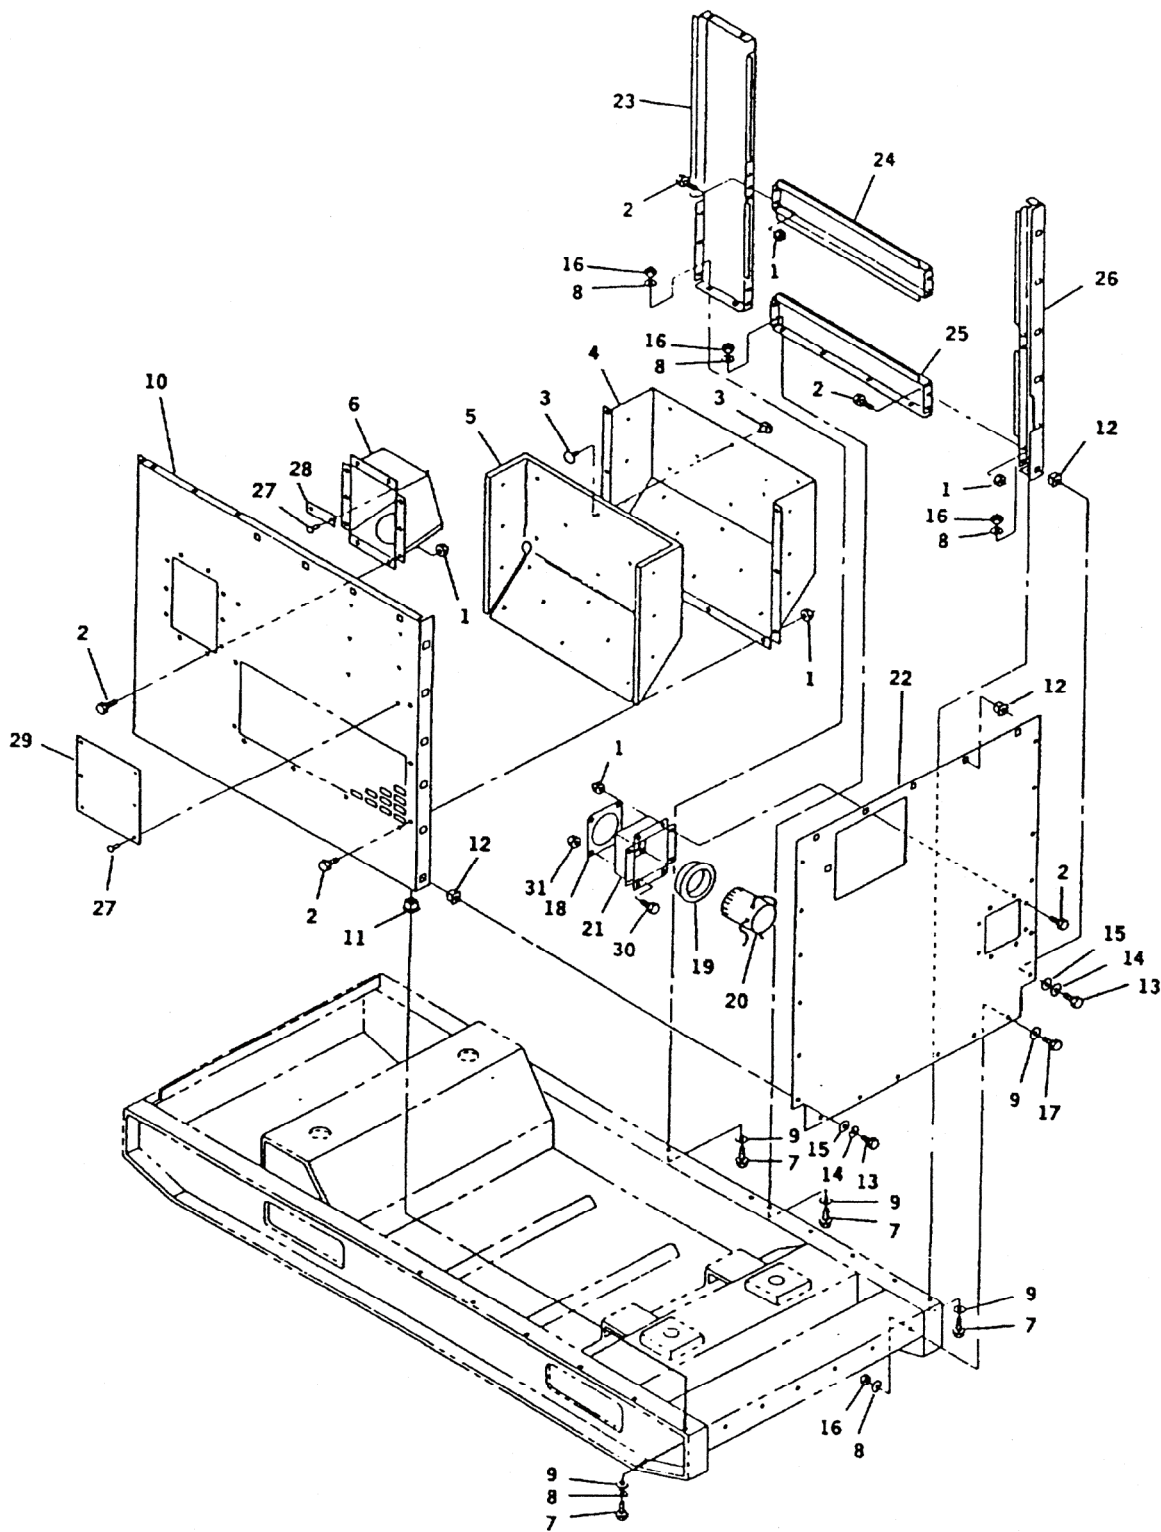


Figure 4. Rear Housing Panels.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	PER EQUIP
GROUP 02 – HOUSING									
FIG. 4 REAR HOUSING PANELS									
1	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	31	
2	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	31	
3	PAOZZ	PAOZZ			30554	88-20210	.CLIP, PANEL	20	
4	XDOZZ	XB			30554	88-22072	.BAFFLE, AIR INTAKE	1	
5	MOOZZ	MOO			30554	88-22594	.INSULATION MAKE FROM P/N FF40JM02 (28818), 16 INCHES X 22 INCHES REQUIRED	1	
6	XDOZZ	XB			30554	88-22661	.PANEL, FILLER NECK	1	
7	PAOZZ	PAOZZ			30554	88-20260-33	.SCREW, HEX WASHERHEAD	10	
8	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	20	
9	PAOZZ	PAOZZ			96906	MS52412-5	.WASHER, FLAT	20	
10	XDOZZ	XB			30554	88-21925	.PANEL, REAR LEFT SIDE	1	
11	PAOZZ	PAOZZ			30554	88-21674-3	.NUT, CAGE	4	
12	PAOZZ	PAOZZ			78553	88-21674-2	.NUT, CAGE	21	
13	PAOZZ	PAOZZ			30554	88-20260-23	.SCREW, HEX WASHERHEAD	12	
14	PAOZZ	PAOZZ			80205	MS35338-62	.WASHER, LOCK	12	
15	PAOZZ	PAOZZ			96906	MS51412-2	.WASHER, FLAT	12	
16	PAOZZ	PAOZZ			30554	88-22790-1	.NUT, PLAIN, HEX	13	
17	PAOZZ	PAOZZ			30554	88-20260-32	.SCREW, HEX WASHERHEAD	6	
18	XDOZZ	XB			30554	69-583	.COVER, ACCESS	1	
19	PAOZZ	PAOZZ			30554	69-570-3	.BUSHING, ELECTRICAL	1	
20	XDOZZ	XB			30554	88-20218	.COVER, ELECTRICAL	1	
21	XDOZZ	XB			30554	88-21964	.BOX, LOAD TERMINAL	1	
22	XDOZZ	XB			30554	88-21977	.PANEL, REAR	1	
23	XDOZZ	XB			30554	88-22074	.PANEL, RIGHT SIDE	1	
24	XDOZZ	XB			30554	88-22040	.SILL, OUTPUT BOX	1	
25	XDOZZ	XB			30554	88-21770	.SILL, LOAD TERMINAL	1	
26	XDOZZ	XB			30554	88-22037	.POST, CORNER, REAR	1	
27	PAOZZ	PAOZZ			81349	M24243/1A402	.RIVET, BLIND	8	
28	MDOZZ	MDO			30554	88-20102	.PLATE, IDENTIFICATION, EXTERNAL FUEL SUPPLY	1	
29	MDOZZ	MDO			30554	88-21723	.PLATE, IDENTIFICATION, LIFTING AND TIEDOWN DIAGRAM	1	
30	PAOZZ	PAOZZ			30554	69-662-35	.SCREW, ASSEMBLED	4	
31	PAOZZ	PAOZZ			97403	13214E3291-3	.NUT, PLAIN	4	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

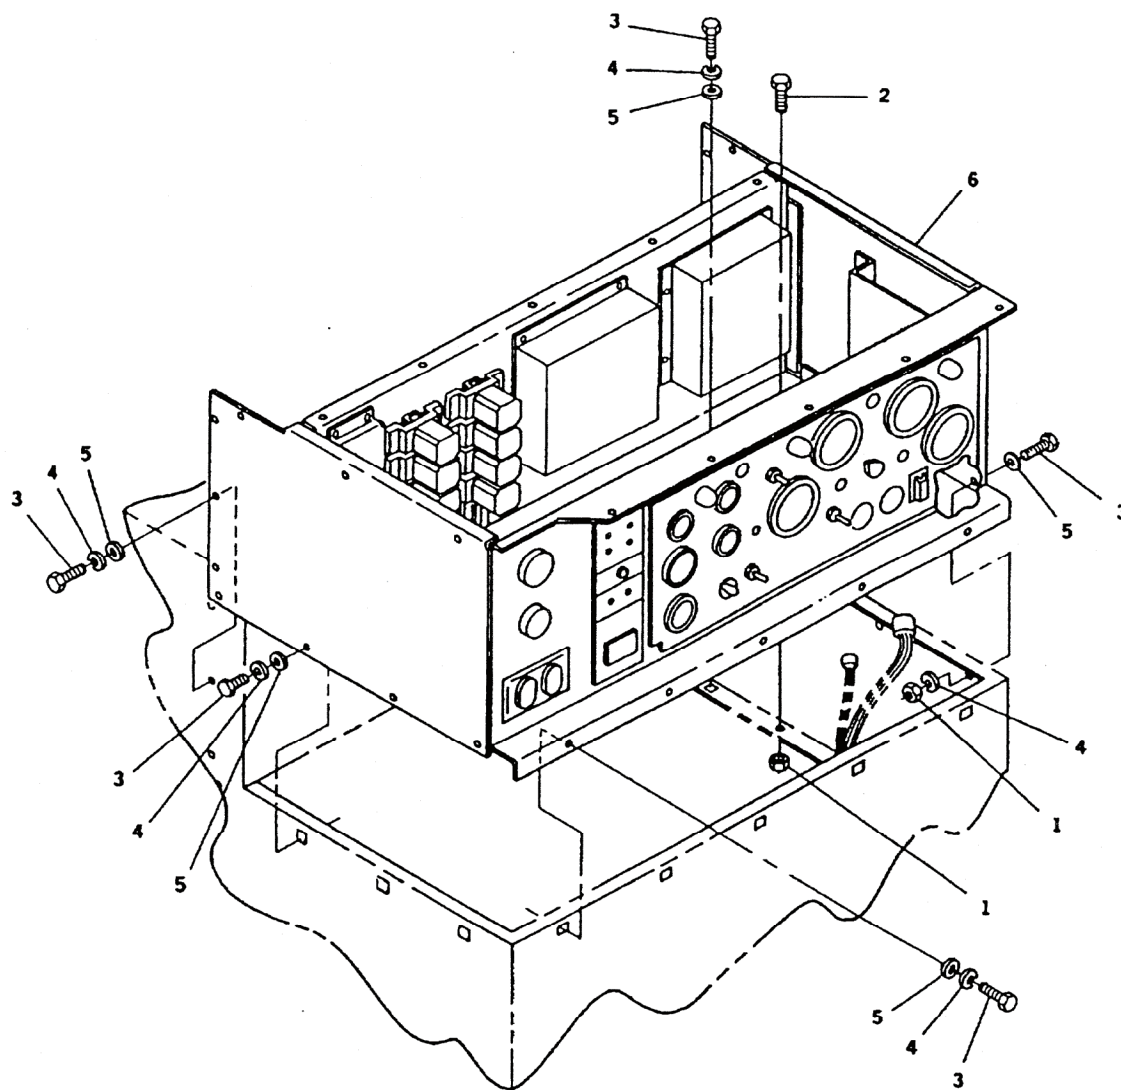


Figure 5. Control Box Installation.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7)
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
							GROUP 03 - CONTROL BOX ASSEMBLY		
							FIG. 5 CONTROL BOX INSTALLATION		
1	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	5	
2	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	5	
3	PAOZZ	PAOZZ			30554	88-20260-23	.SCREW, HEX WASHERHEAD	12	
4	PAOZZ	PAOZZ			80205	MS35338-62	.WASHER, LOCK	12	
5	PAOZZ	PAOZZ			96906	MS51412-2	.WASHER, FLAT	12	
6	PBFFZ	PBFFZ			30554	88-22137	.CONTROL BOX, ASSEMBLY UOC: EMK	1	
6	PBFFZ	PBFFZ			30554	97-24080	.CONTROL BOX, ASSEMBLY UOC: 86Q	1	
6	PBFFZ	PBFFZ			30554	88-22138	.CONTROL BOX, ASSEMBLY UOC: YNN	1	
6	PBFFZ	PBFFZ			30554	97-24081	.CONTROL BOX, ASSEMBLY UOC: 86R	1	
							END OF FIGURE		

SECTION II. REPAIR PARTS LIST (CONTINUED)

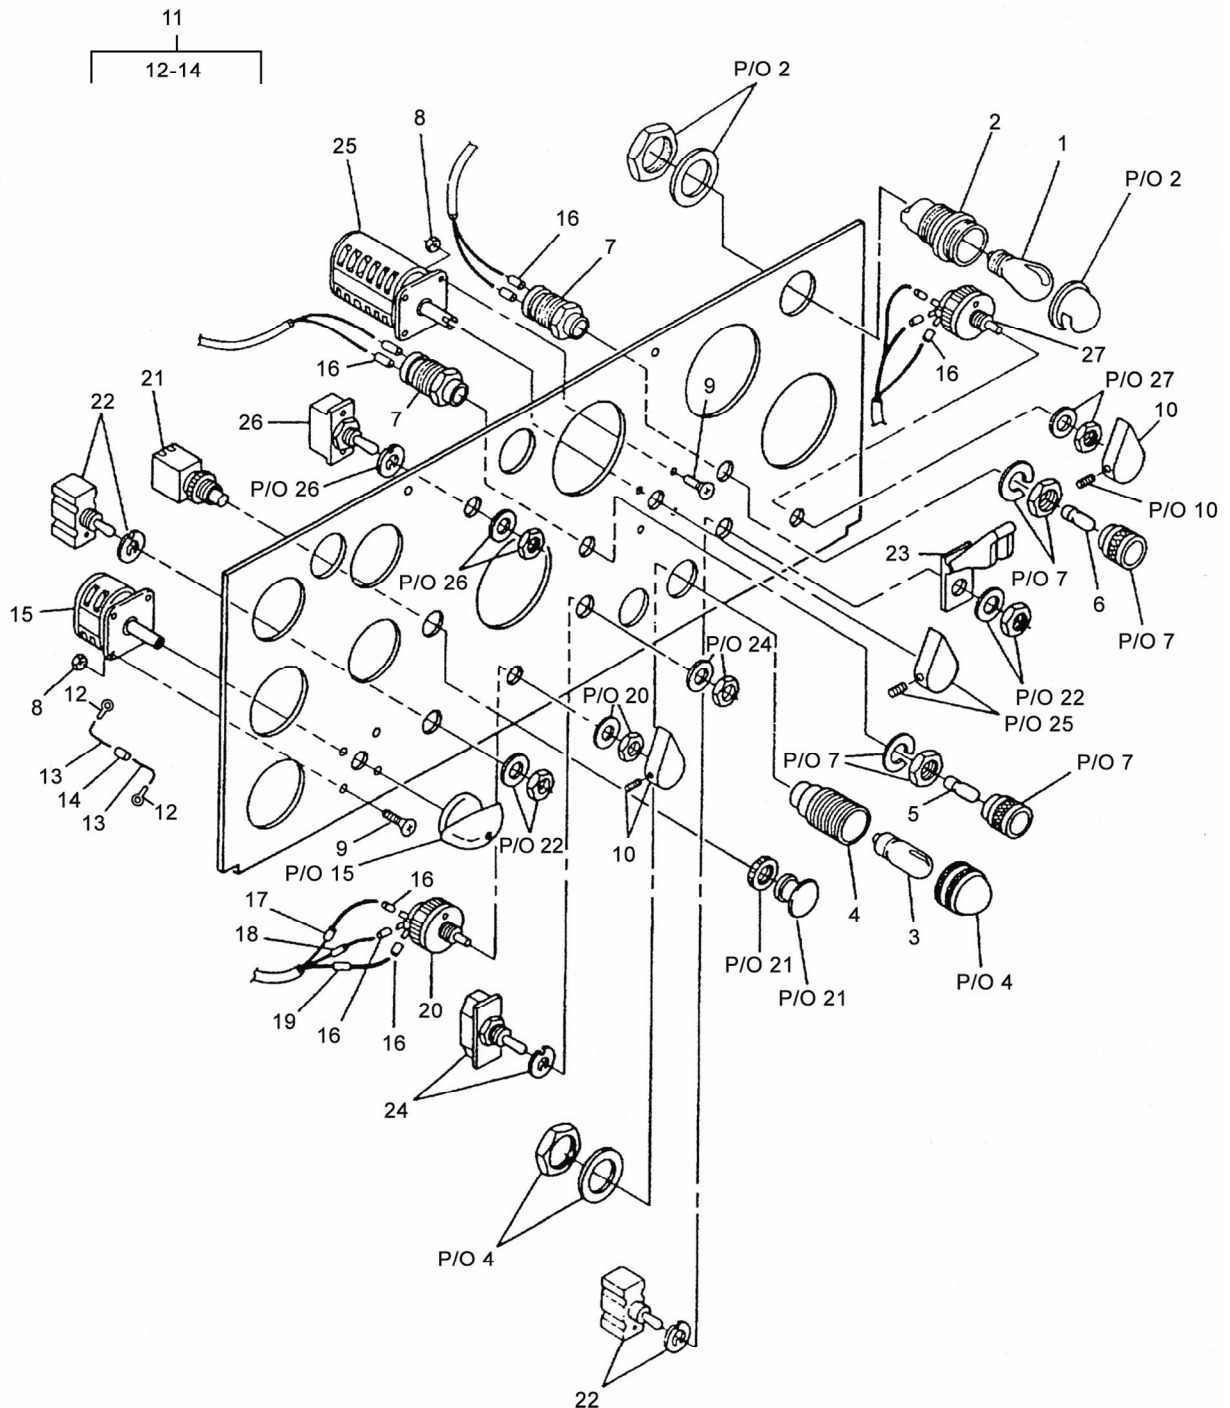


Figure 6. Control Panel Switches and Indicators (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

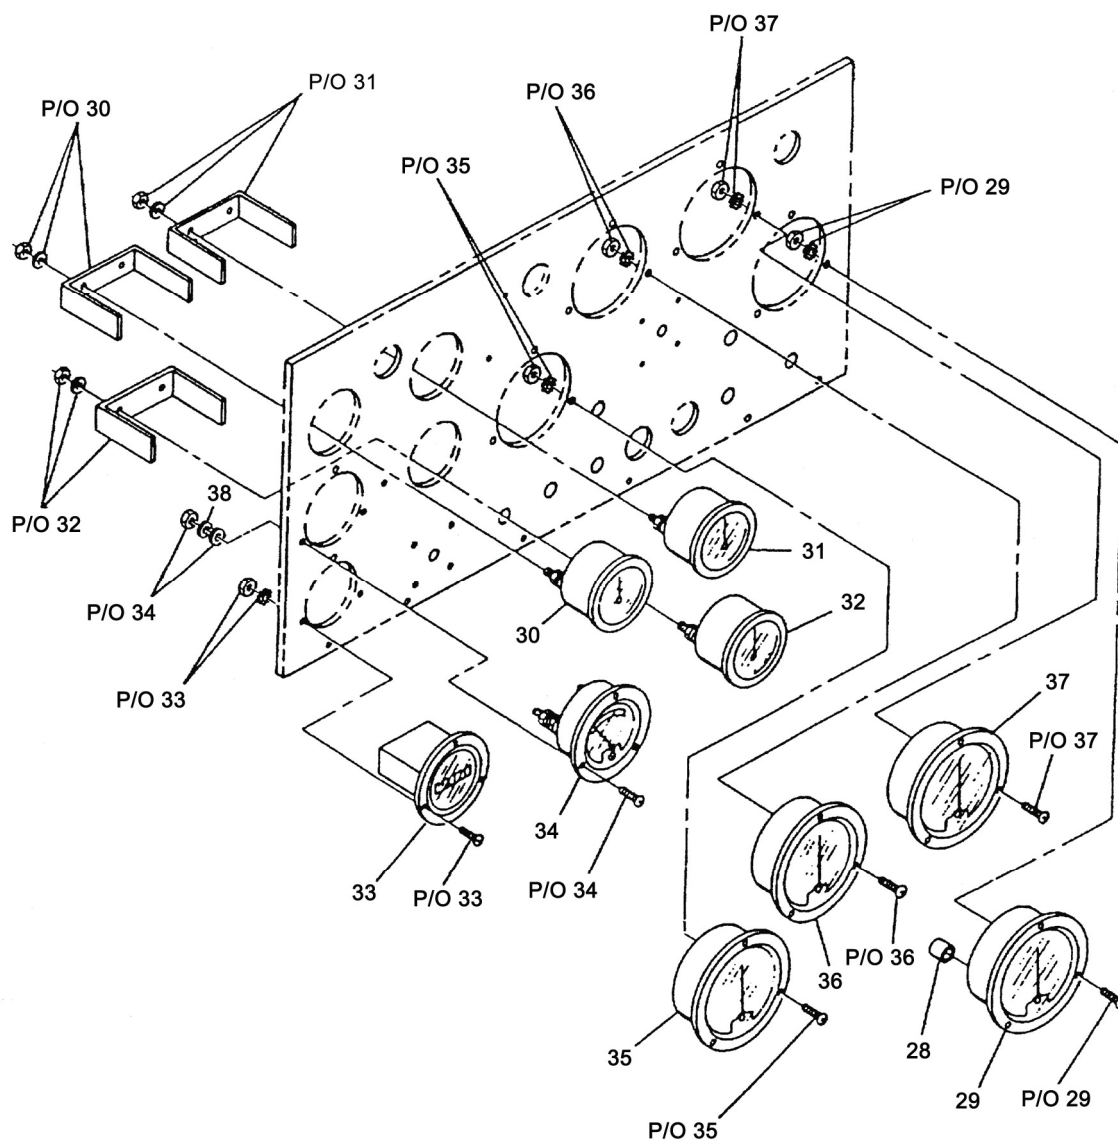


Figure 6. Control Panel Switches and Indicators (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	PER QTY	EQUIP
							GROUP 03 - CONTROL BOX ASSEMBLY		
							FIG. 6 CONTROL PANEL SWITCHES/INDICATORS		
1	PAOZZ	PAOZZ			30554	69-594 GREEN	..LAMP, INCANDESCENT	3	
2	PAOZZ	PAOZZ			30554	69-593	..LIGHT, PANEL	3	
3	PAOZZ	PAOZZ			96906	A50452-1	..LAMP, INCANDESCENT	2	
4	PAOZZ	PAOZZ			30554	88-21124	..LIGHT, INDICATOR	2	
5	PAOZZ	PAOZZ			30554	88-21899	..LAMP, LED, GREEN	1	
6	PAOZZ	PAOZZ			30554	88-21898	..LAMP. LED, YELLOW	1	
7	PAOZZ	PAOZZ			96906	MS25041-5	..LIGHT, INDICATOR	2	
8	PAOZZ	PAOZZ			30554	69-561-2	..NUT, PLAIN, ASSEMBLED	8	
9	PAOZZ	PAOZZ			81348	FFS92TYPE3 STYLE2C	..SCREW, MACHINE	8	
10	PAOZZ	PAOZZ			80205	MS91528-2K2B	..KNOB	2	
11	AOOOO	AOO			30554	88-22418-2	..DIODE ASSEMBLY	1	
12	PAOZZ	PAOZZ			81343	MS25036-103	...TERMINAL, LUG	2	
13	MOOZZ	MOO			30554	88-22418-2-2	...SLEEVE, INSULATION MAKE FROM P/N M23053/5-104-0 (81349), AS REQUIRED	1	
14	PAOZZ	PAOZZ			50434	1901-0759	...SEMICONDUCTOR DEVICE	1	
15	PAOZZ	PAOZZ			30554	01-20002	..SWITCH, ROTARY	1	
16	MOOZZ	MOO			30554	88-22137-105	..INSULATION, SLEEVING MAKE FROM P/N M23053/5-105-0 (81349), AS REQUIRED	2	
17	MOOZZ	MOO			30554	88-22629-078	..MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	1	
18	MOOZZ	MOO			30554	88-22629-079	..MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	1	
19	MOOZZ	MOO			30554	88-22629-080	..MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	1	
20	PAOZZ	PAOZZ			30554	88-22773-1	..RESISTOR, VARIABLE,	1	
21	PAOZZ	PAOZZ			30554	96-23737	..SWITCH, ASSY, EMERGENCY STOP	1	
22	PAOZZ	PAOZZ			30554	88-21078	..SWITCH, TOGGLE	2	
23	PAOZZ	PAOZZ			96906	MS25224-1	..GUARD, SWITCH	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) PER QTY	(7) USMC QTY EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
24	PAOZZ	PAOZZ			30554	88-20176	..SWITCH, TOGGLE AC CIRCUIT INTERRUPTER	1	
25	PAOZZ	PAOZZ			30554	01-20003	..SWITCH, ROTARY	1	
26	PAOZZ	PAOZZ			30554	88-22141	..SWITCH, TOGGLE	1	
27	PAOZZ	PAOZZ			30554	88-22773-2	..RESISTOR, VARIABLE, UOC: EMK, 86Q	1	
27	PAOZZ	PAOZZ			30554	88-22773-3	..RESISTOR, VARIABLE, UOC: YNN, 86R	1	
28	XDOZZ	XB			30554	88-22555	..CAP, SLEEVE	2	
29	PAOZZ	PAOZZ			30554	69-599	..VOLTMETER	1	
30	PAOZZ	PAOZZ			30554	88-21103	..INDICATOR, FUEL LEVEL	1	
31	PAOZZ	PAOZZ			30554	88-21105	..INDICATOR, TEMPERATURE	1	
32	PAOZZ	PAOZZ			30554	88-21104	..INDICATOR, OIL PRESSURE	1	
33	PAOZZ	PAOZZ			30554	73-0507	..METER, TIME TOTALIZING	1	
34	PAOZZ	PAOZZ			30554	69-574	..AMMETER	1	
35	PAOZZ	PAOZZ			30554	88-21072	..METER, ELECTRICAL, FREQ UOC: EMK, 86Q	1	
35	PAOZZ	PAOZZ			30554	88-21073	..METER, ELECTRICAL, FREQ UOC: YNN, 86R	1	
36	PAOZZ	PAOZZ			30554	69-597	..AMMETER CURRENT UOC: EMK, 86Q	1	
36	PAOZZ	PAOZZ			30554	69-598	..AMMETER CURRENT UOC: YNN, 86R	1	
37	PAOZZ	PAOZZ			30554	70-4012	..WATTMETER	1	
38	PAOZZ	PAOZZ			96906	MS51412-20	..WASHER, FLAT	3	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

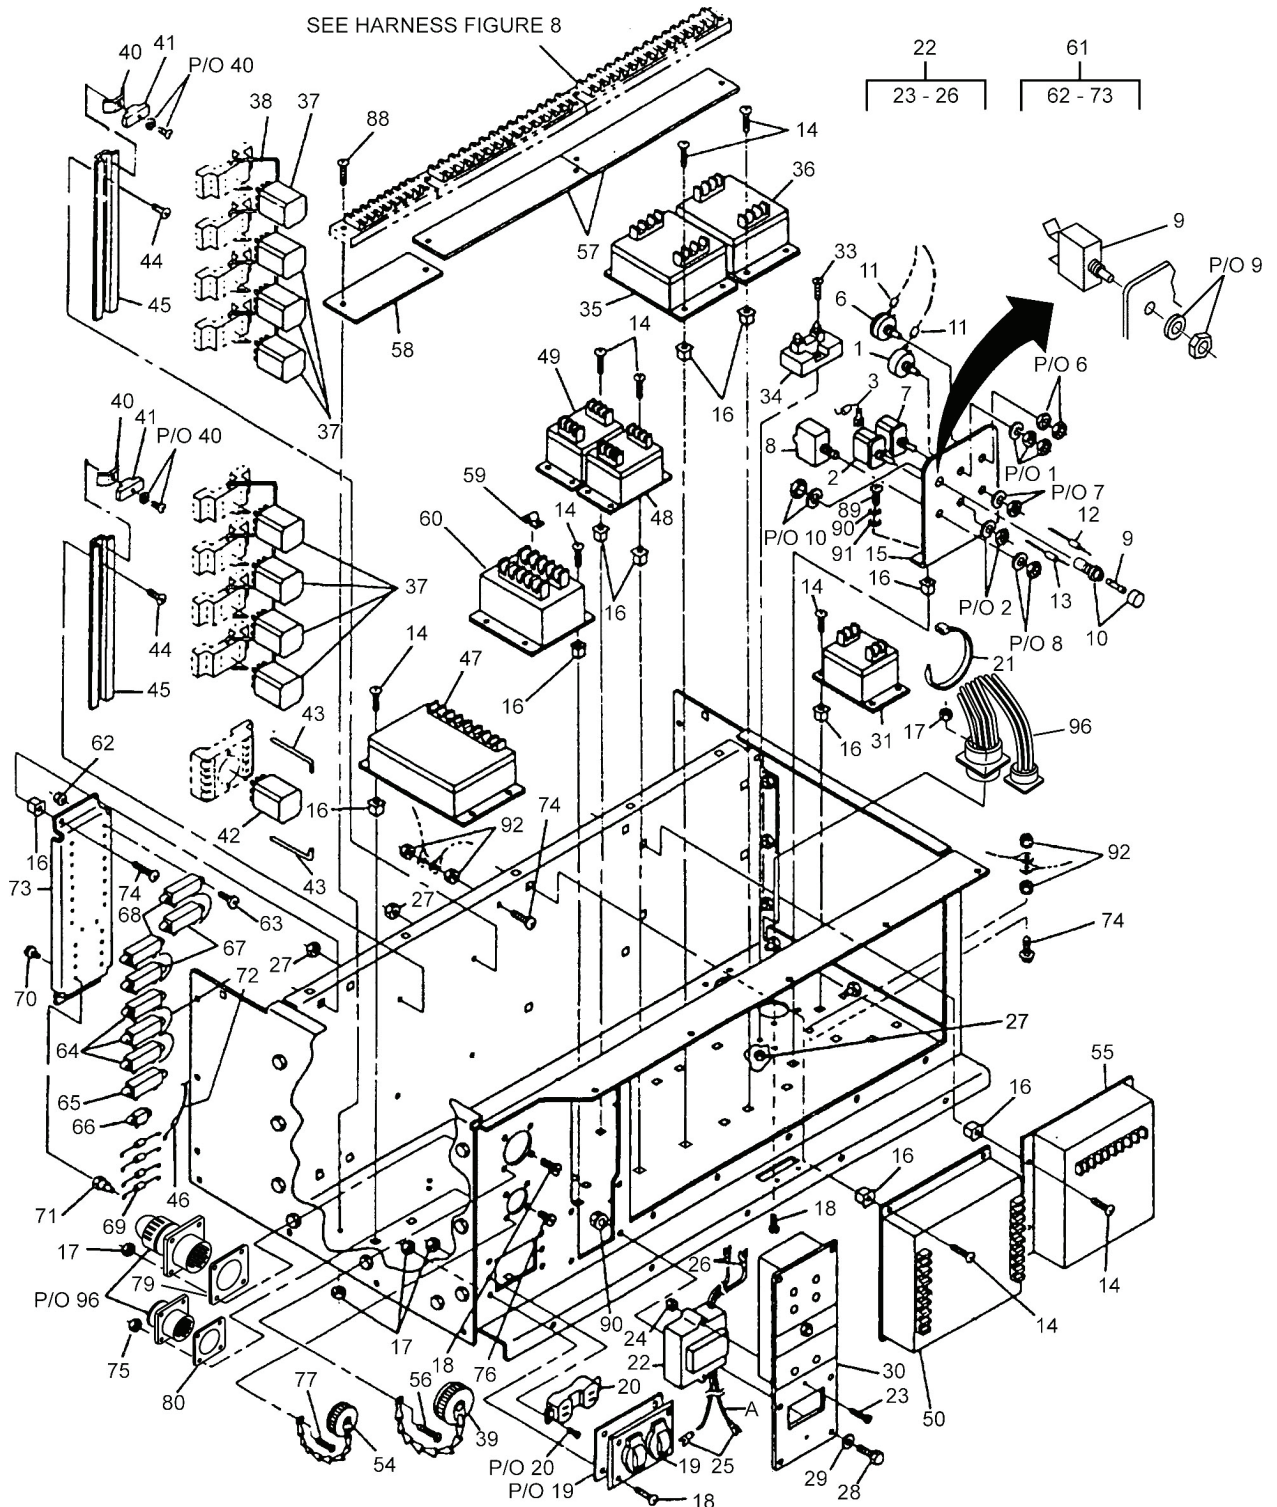


Figure 7. Control Box Assembly (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

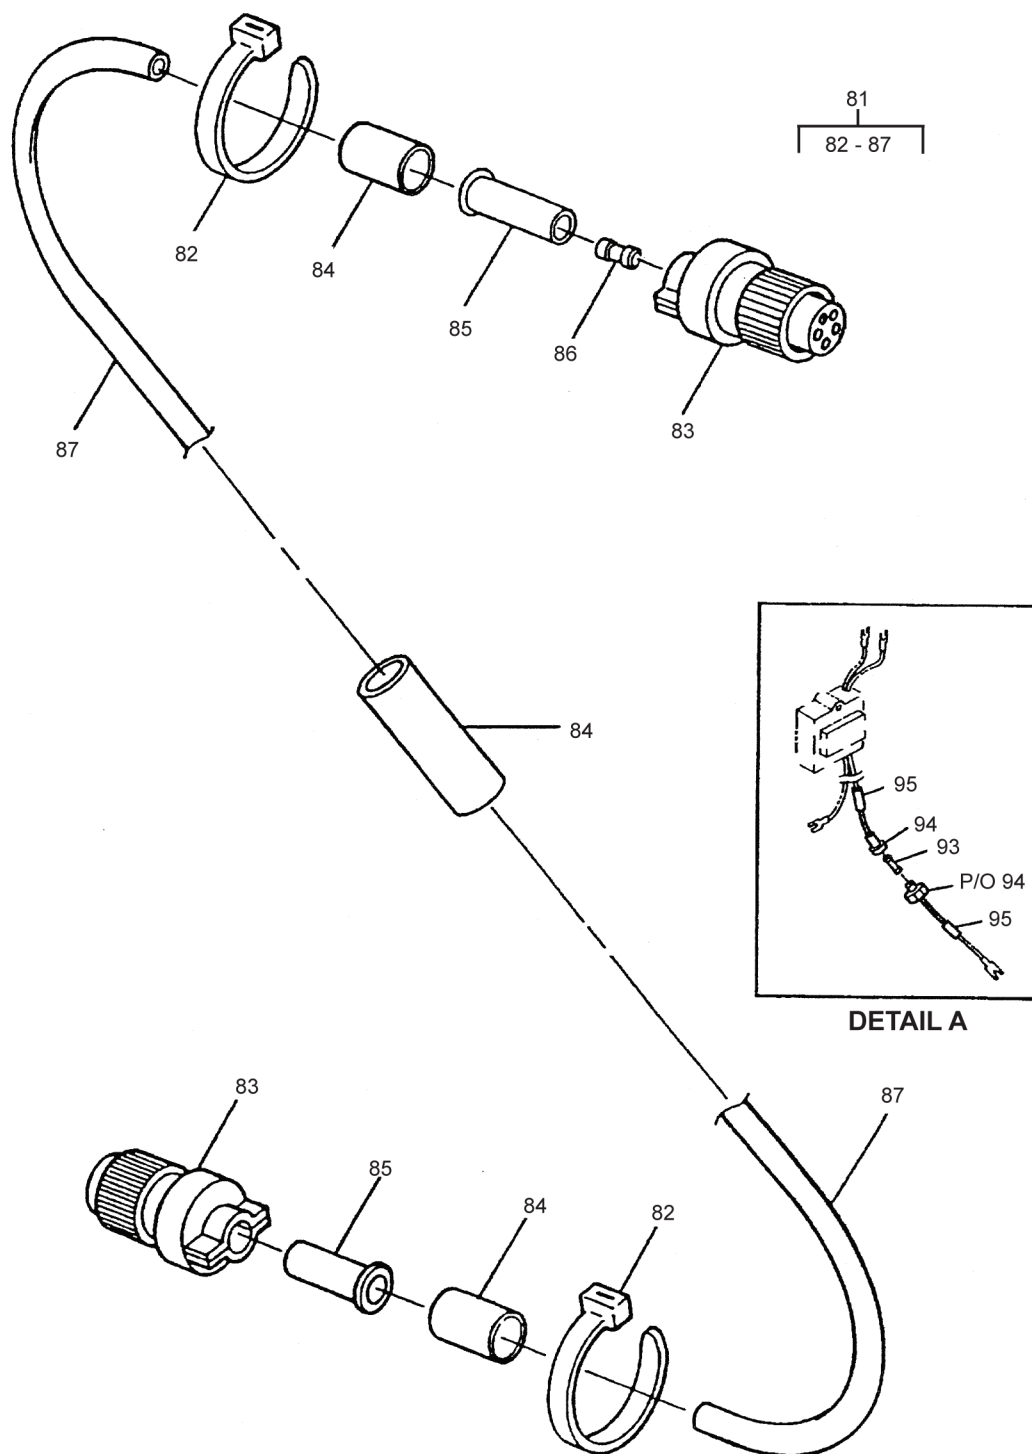


Figure 7. Control Box Assembly (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7) USMC QTY
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	PER QTY	EQUIP
							GROUP 03 - CONTROL BOX ASSEMBLY		
							FIG. 7 CONTROL BOX ASSEMBLY		
1	PAOZZ	PAOZZ			30554	88-20592-1	..RESISTOR, VARIABLE,	1	
2	PAOZZ	PAOZZ			30554	88-22580	..SWITCH, TOGGLE, FREQ SELECT	1	
3	AOOOO	AOO			30554	01-21506-2	..RESISTOR ASSY UOC: EMK, 86Q	1	
3	AOOOO	AOO			30554	01-21506-1	..RESISTOR ASSY UOC: YNN, 86R	1	
4	NOT USED								
5	NOT USED								
6	PAOZZ	PAOZZ			30554	88-21676-1	..RESISTOR, VARIABLE,	1	
7	PAOZZ	PAOZZ			30554	88-21080	..SWITCH, TOGGLE, OVER SPEED RESET	1	
8	PAOZA	PAOZA			30554	88-21155	..CIRCUIT BREAKER UOC: EMK, YNN	1	
9	PAOZZ	PAOZZ			30554	88-20147-1	..FUSE, CARTRIDGE UOC: EMK, YNN	1	
9	PAOZZ	PAOZZ			30554	97-24110	..CIRCUIT BREAKER UOC: 86Q, 86R	1	
10	PAOZZ	PAOZZ			30554	88-20575	..FUSEHOLDER, EXTRACTOR UOC: EMK, YNN	1	
11	MOOZZ	MOO			30554	88-22137-105	..INSULATION, SLEEVING MAKE FROM P/N M23053/5- 105-0 (81349), AS REQUIRED	1	
12	MOOZZ	MOO			30554	88-22629-041	..MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
13	MOOZZ	MOO			30554	88-22629-040	..MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
14	PAOZZ	PAOZZ			30554	69-662-65	..SCREW, ASSEMBLED	40	
15	XDOZZ	XB			30554	88-21593	..BRACKET, CONTROLS UOC: EMK	1	
15	XDOZZ	XB			30554	97-24120	..BRACKET, CONTROLS UOC: 86Q	1	
15	XDOZZ	XB			30554	88-21976	..BRACKET, CONTROLS UOC: YNN	1	
15	XDOZZ	XB			30554	97-24121	..BRACKET, CONTROLS UOC: 86R	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) PER QTY	(7) USMC QTY EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
16	PAOZZ	PAOZZ			30554	88-21674-1	..NUT, CAGE	40	
17	PAOZZ	PAOZZ			30554	69-561-2	..NUT, PLAIN, ASSEMBLED	24	
18	PAOZZ	PAOZZ			30554	69-662-20	..SCREW, ASSEMBLED	15	
19	PAOZZ	PAOZZ			30554	70-1580	..COVER, RECEPTACLE, DUP	1	
20	PAOZZ	PAOZZ			30554	88-20251	..RECEPTACLE, DUPLEX UOC: EMK, 86Q	1	
21	PAOZZ	PAOZZ			96906	MS3367-5-9	..STRAP, TIEDOWN, ELECT UOC: EMK, 86Q	10	
22	XBOZZ	XBOZZ			60177	19450-2	..INTERRUPTER, GROUND, WHEN REPLACING, USE P/N 88-22825-2 (30554). NO IN-LINE FUSE REQUIRED UOC: EMK, 86Q	1	
22	PAOZZ	PAOZZ			30554	88-22825-2	..INTERRUPTER, GROUND UOC: EMK, 86Q	1	
22	PAOOO	PAOOO			60177	29100	..INTERRUPTER, GROUND, WHEN REPLACING, USE P/N 88-22826-2 (30554). NO IN-LINE FUSE REQUIRED UOC: YNN, 86R	1	
22	PAOZZ	PAOZZ			30554	88-22826-2	..INTERRUPTER, GROUND UOC: YNN, 86R	1	
23	PAOZZ	PAOZZ			80205	MS35206-329	...SCREW, MACHINE UOC: EMK, 86Q	2	
24	PAOZZ	PAOZZ			80205	MS21044N06	...NUT, SELF-LOCKING, HEX	1	
25	PAOZZ	PAOZZ			30554	88-20274-11	...TERMINAL, LUG #8, 22-18 AWG UOC: EMK, 86Q	2	
26	PAOZZ	PAOZZ			30554	88-20274-5	...TERMINAL, LUG #6, 16-14 AWG UOC: EMK, 86Q	2	
27	PAOZZ	PAOZZ			30554	69-561-3	..NUT, PLAIN, ASSEMBLED	6	
28	PAOZZ	PAOZZ			30554	88-20260-21	..SCREW, HEX WASHERHEAD	6	
29	PAOZZ	PAOZZ			96906	MS51412-2	..WASHER, FLAT	6	
30	PBOZZ	PBOZZ			30554	88-21142	..INDICATOR, FAULT, LOC	1	
31	PAOZZ	PAOZZ			30554	88-21134	..TRANSDUCER, FREQUENCY UOC: EMK, 86Q	1	
31	PAOZZ	PAOZZ			30554	88-21135	..TRANSDUCER, FREQUENCY UOC: YNN, 86R	1	
32	NOT USED								
33	PAOZZ	PAOZZ			30554	69-662-37	..SCREW, ASSEMBLED	2	
34	PBOZZ	PBOZZ			30554	88-21165	..SHUNT, INSTRUMENT	1	
35	PAOZZ	PAOZZ			30554	88-21138	..RELAY, OVER/UNDER VOL	1	
36	PAOZZ	PAOZZ			30554	88-21141	..RELAY, ELECTROMAGNET	1	
37	PAOZZ	PAOZZ			30554	88-21085	..RELAY, ELECTROMAGNET	8	
38	XDOZZ	XB			30554	88-22768	..CLIP, SPRING TENSION	8	
39	PAOZZ	PAOZZ			30554	88-22672	..COVER, ELECTRICAL CO	4	
40	PAOZA	PAOZA			30554	88-22768	..MOUNTING CLIP	4	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) PER QTY	(7) USMC QTY EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
41	PAOZZ	PAOZZ			30554	88-22767	..INSULATOR	4	
42	PAOZZ	PAOZZ			30554	88-21896	..RELAY ,ELECTROMAGNET UOC: EMK, 86Q	1	
42	PAOZZ	PAOZZ			30554	88-22463	..RELAY, ELECTROMAGNET UOC: YNN, 86R	1	
43	XDOZZ	XB			30554	88-21897-2	..CLIP, RELAY SOCKET	2	
44	PAOZZ	PAOZZ			30554	69-662-35	..SCREW, ASSEMBLED	4	
45	XDOZZ	XB			30554	88-20258	..TRACK, SOCKET MOUNT	2	
46	MOOZZ	MOO			30554	88-22629-021	..MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
47	PAOZZ	PAOZZ			30554	88-21133	..TRANSDUCER, WATT	1	
48	PAOZZ	PAOZZ			30554	88-21145	..RELAY, PERMISSIVE PARAL	1	
49	PAOZZ	PAOZZ			30554	88-21140	..RELAY, REVERSE POWER	1	
50	PBFZZ	PBOZZ			30554	88-21860	..GOVERNOR, DIESEL ENG UOC: EMK	1	
50	PBFZZ	PBOZZ			30554	97-24134	..GOVERNOR, DIESEL ENG UOC: 86Q	1	
50	PBFZZ	PBOZZ			30554	88-21861	..GOVERNOR, DIESEL ENG UOC:YNN, 86R	1	
51	NOT USED								
52	NOT USED								
53	NOT USED								
54	PAOZZ	PAOZZ			96906	MS25043-18DA	..COVER, ELECTRICAL CO	1	
55	PAOZZ	PAOZZ			30554	01-21501-1	..REGULATOR, VOLTAGE UOC: EMK, 86Q	1	
55	PAOZZ	PAOZZ			30554	01-21501-2	..REGULATOR, VOLTAGE UOC: EMK, 86Q	1	
55	PAOZZ	PAOZZ			30554	01-21507-1	..VOLTAGE REGULATOR UOC: YNN, 86R	1	
56	PAOZZ	PAOZZ			30554	69-662-22	..SCREW, ASSEMBLED	7	
57	XDOZZ	XB			30554	88-21182-22	..MARKER, STRIP	2	
58	XDOZZ	XB			30554	88-21182-12	..MARKER, STRIP	1	
59	PAOZZ	PAOZZ			30554	88-21183-2	..CONTACT, ELECTRICAL	2	
60	PBFZZ	PBOZZ			30554	88-21144	..LOAD MEASUREMENT UNIT	1	
61	AOOOO	AOO			30554	88-22106	..RESISTOR, DIODE ASSY	1	
62	PAOZZ	PAOZZ			30554	69-561-1	...NUT, PLAIN, ASSEMBLED	18	
63	PAOZZ	PAOZZ			30554	69-662-5	...SCREW, ASSEMBLED	18	
64	PAOZZ	PAOZZ			30554	88-20262	...RESISTOR, FIXED, WIRE	3	
65	PAOZZ	PAOZZ			30554	88-20263	...RESISTOR, FIXED, WIRE	1	
66	PAOZZ	PAOZZ			30554	88-20265	...RESISTOR, FIXED, WIRE	1	
67	PAOZZ	PAOZZ			30554	88-20266	...RESISTOR, FIXED, WIRE	2	
68	PAOZZ	PAOZZ			30554	88-20267	...RESISTOR, FIXED, WIRE	2	
69	PAOZZ	PAOZZ			50434	1901-0759	...SEMICONDUCTOR DEVICE	4	
70	PAOZZ	PAOZZ			30554	88-20299	...SCREW, ASSEMBLED	8	
71	PAOZZ	PAOZZ			30554	88-20272	...TERMINAL, INSULATED	8	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) PER QTY	(7) USMC QTY EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
72	MOOZZ	MOO			30554	88-22106-11	...WIRE, ELECTRIC MAKE FROM P/N M5086/2-20-9 (81349), AS REQUIRED	1	
73	XDOZZ	XB			30554	88-21971	...BRACKET, BURDEN RES	1	
74	PAOZZ	PAOZZ			30554	69-662-65	..SCREW, ASSEMBLED	2	
75	PAOZZ	PAOZZ			30554	69-561-1	..NUT, PLAIN, ASSEMBLED	4	
76	PAOZZ	PAOZZ			30554	69-662-5	..SCREW, ASSEMBLED	3	
77	PAOZZ	PAOZZ			30554	69-662-7	..SCREW, ASSEMBLED	1	
78	NOT USED								
79	PAOZZ	PAOZZ			96906	MS51007-12	..GASKET UOC: EMK, 86Q	1	
80	PAOZZ	PAOZZ			96906	MS51007	..GASKET UOC: EMK, 86Q	1	
81	MFOFF	MFOFF			30554	88-22209	..CABLE ASSEMBLY	1	
82	PAOZZ	PAOZZ			96906	MS3367-1-9	...STRAP, TIEDOWN, ELECT	2	
83	PAOZA	PAOZA			96906	MS3106F18-1S	...CONNECTOR, PLUG, ELEC	2	
84	MOOZZ	MOO			30553	88-22209-7	...INSULATION, SLEEVING MAKE FROM P/N M23053/5- 108-9 (81349), AS REQUIRED	1	
85	PAOZZ	PAOZZ			96906	MS3420-10	...BUSHING, NONMETALLIC	2	
86	PAOZZ	PAOZZ			96906	MS25251-12	...PLUG, END SEAL, ELECT	1	
87	MOOZZ	MOO			30554	88-21995	...CABLE, MULTICONDUCTOR MAKE FROM P/N 8407 (16498), 300 INCHES REQUIRED	1	
88	PAOZZ	PAOZZ			30554	69-662-22	..SCREW, ASSEMBLED	6	
89	PAOZZ	PAOZZ			30554	88-20260-21	..SCREW, HEX WASHERHEAD	2	
90	PAOZZ	PAOZZ			80205	MS35338-62	..WASHER, LOCK	2	
91	PAOZZ	PAOZZ			96906	MS51512-2	..WASHER, FLAT	2	
92	PAOZZ	PAOZZ			30554	69-561-6	..NUT, PLAIN, ASSEMBLED	2	
93	PAOZZ	PAOZZ			81349	F03A250V10AS	..FUSE, CARTRIDGE	1	
94	PAOZZ	PAOZZ			75915	150145	..FUSEHOLDER, EXTRACTOR	1	
95	PAOZZ	PAOZZ			56501	RBB25	..SPLICE, CONDUCTOR	1	
96	PBOFF	PBOOO			30554	88-22303	..WIRE HARNESS, BRANCH (SEE FIGURE 8 FOR PARTS BREAKDOWN) UOC: EMK	REF	
96	PBOFF	PBOOO			30554	88-22664	..WIRING HARNESS, BRANCH (SEE FIGURE 8 FOR PARTS BREAKDOWN) UOC: YNN	REF	
96	PBOFF	PBOOO			30554	97-24049	..WIRING HARNESS, BRANCH (SEE FIGURE 8 FOR PARTS BREAKDOWN) UOC: 86Q	REF	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM	ARMY	AIR	NAVY	USMC	FSCM	PART	DESCRIPTION AND	PER	
NO.		FORCE				NUMBER	USABLE ON CODE (UOC)	QTY	EQUIP
96	PBOFF	PBOOO			30554	97-24060	..WIRING HARNESS, BRANCH (SEE FIGURE 8 FOR PARTS BREAKDOWN) UOC: 86R	REF	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

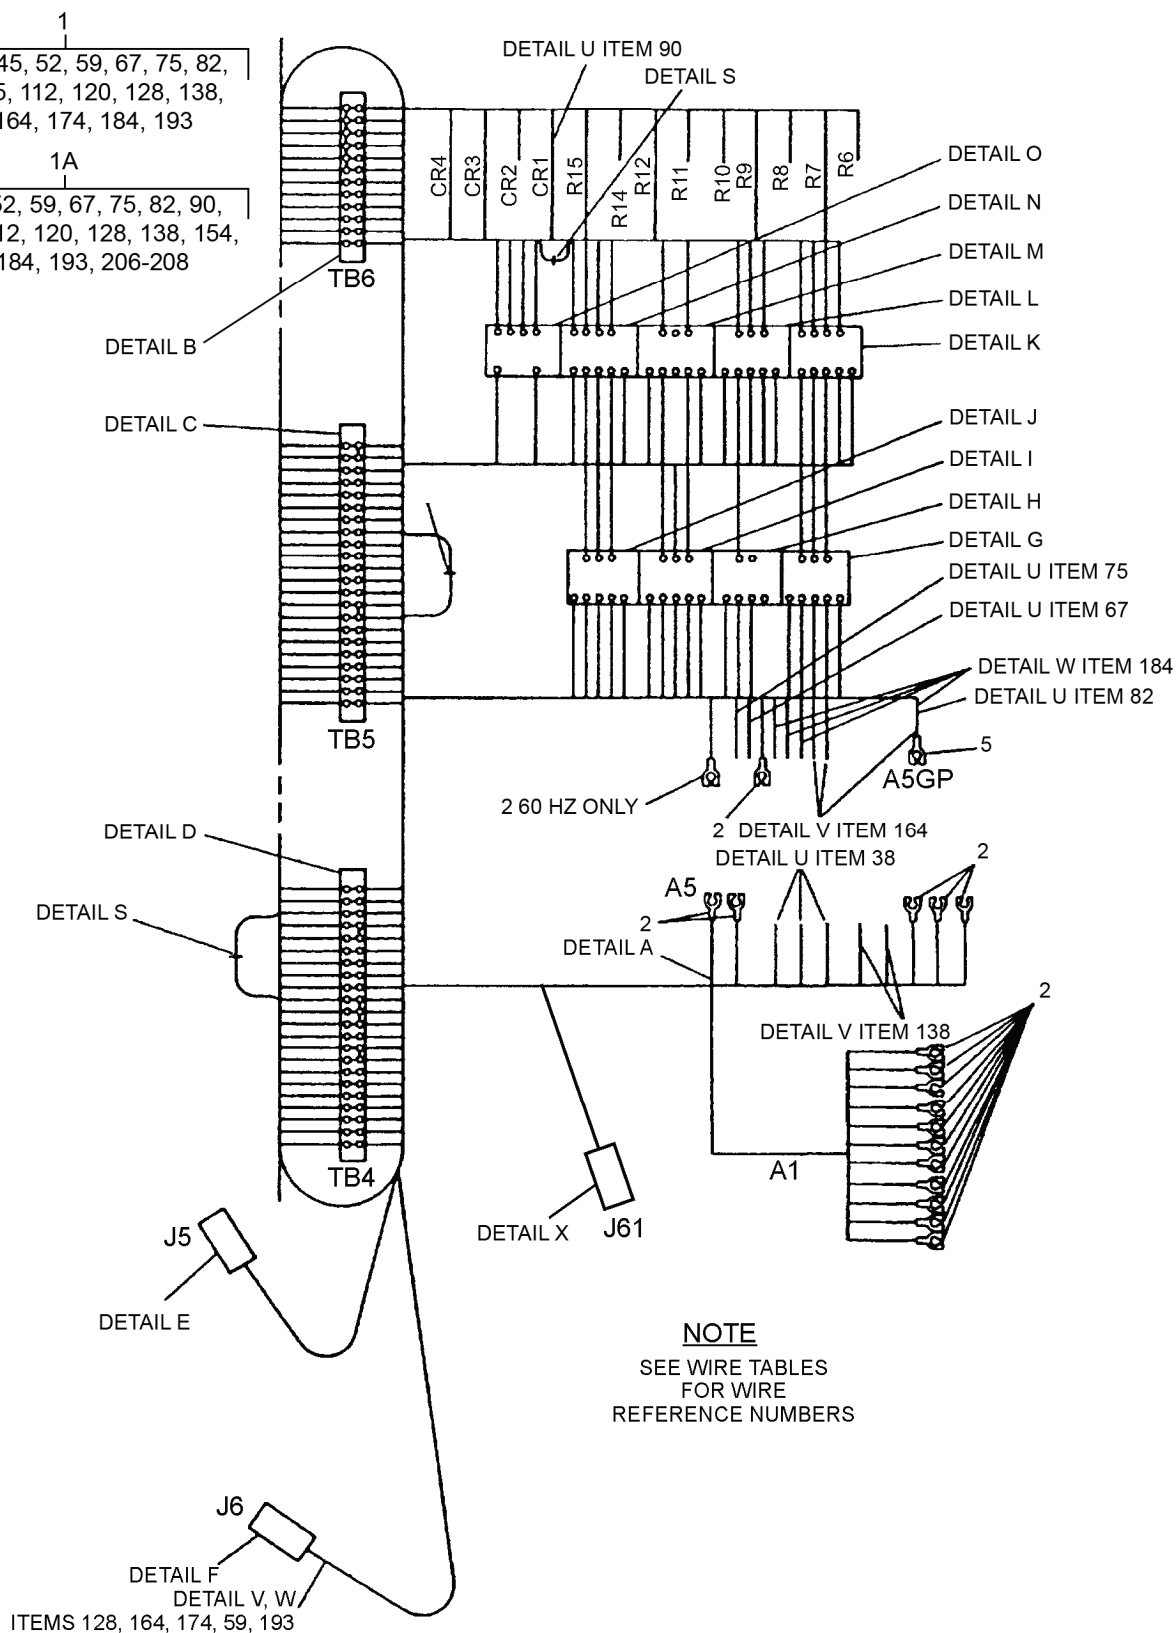


Figure 8. Control Box Harness Assembly (Sheet 1 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

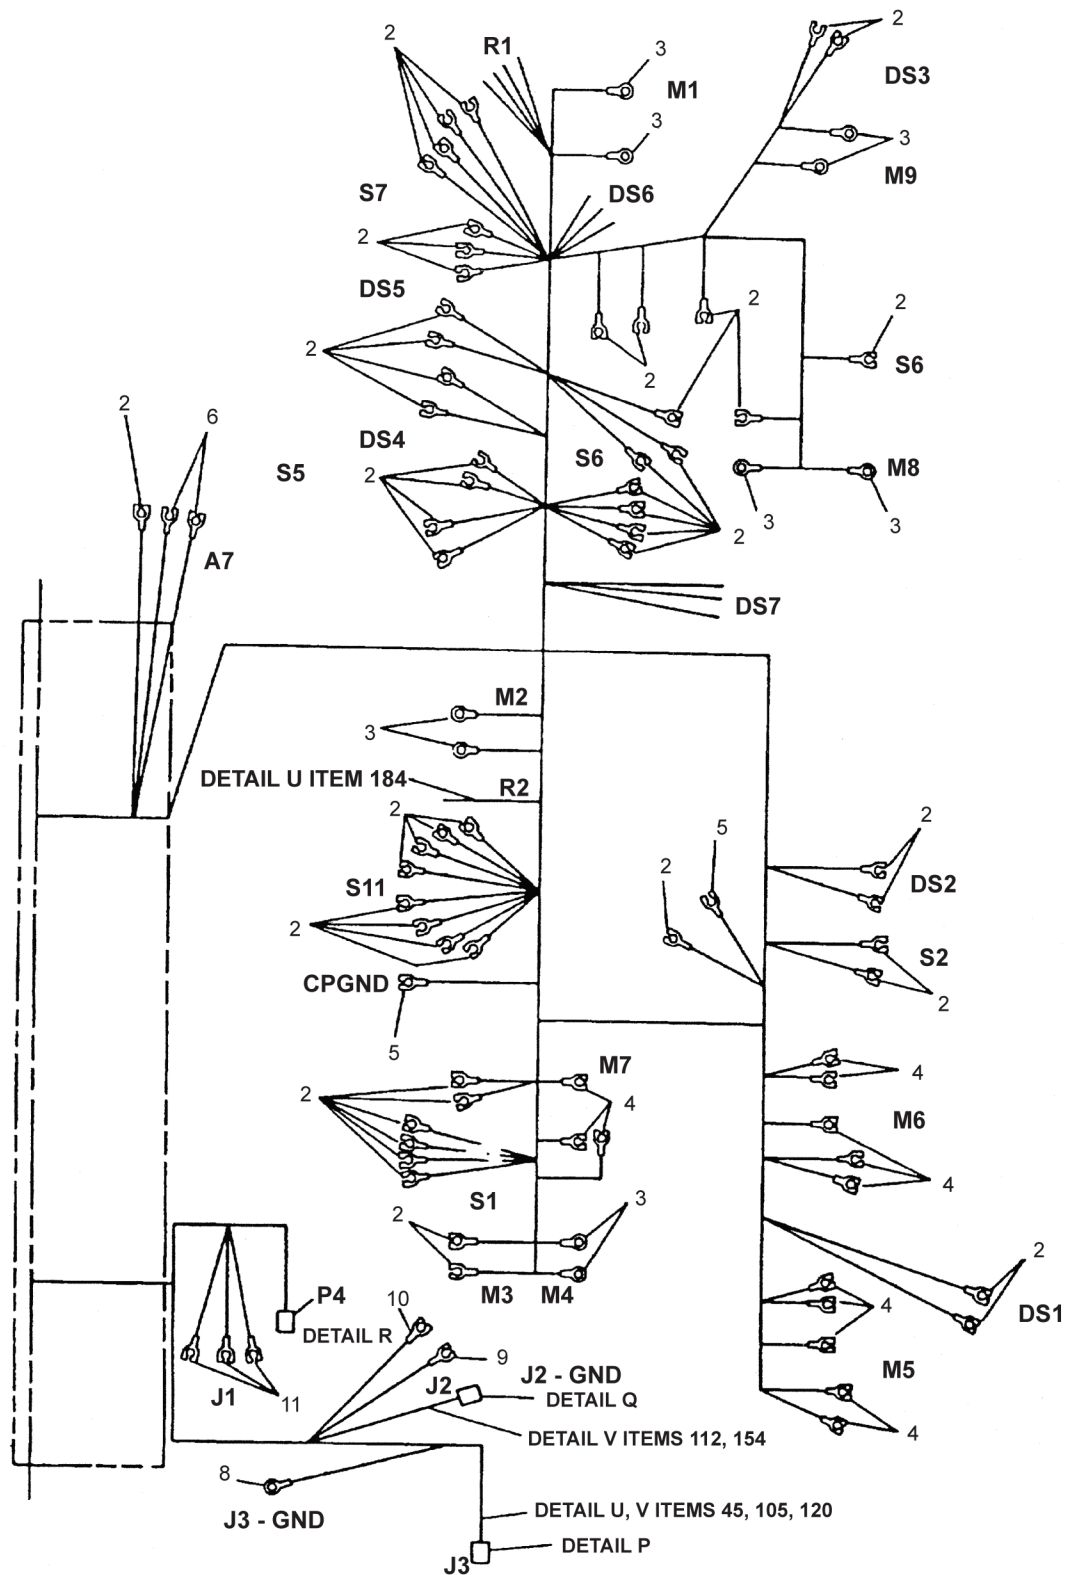


Figure 8. Control Box Harness Assembly (Sheet 2 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)


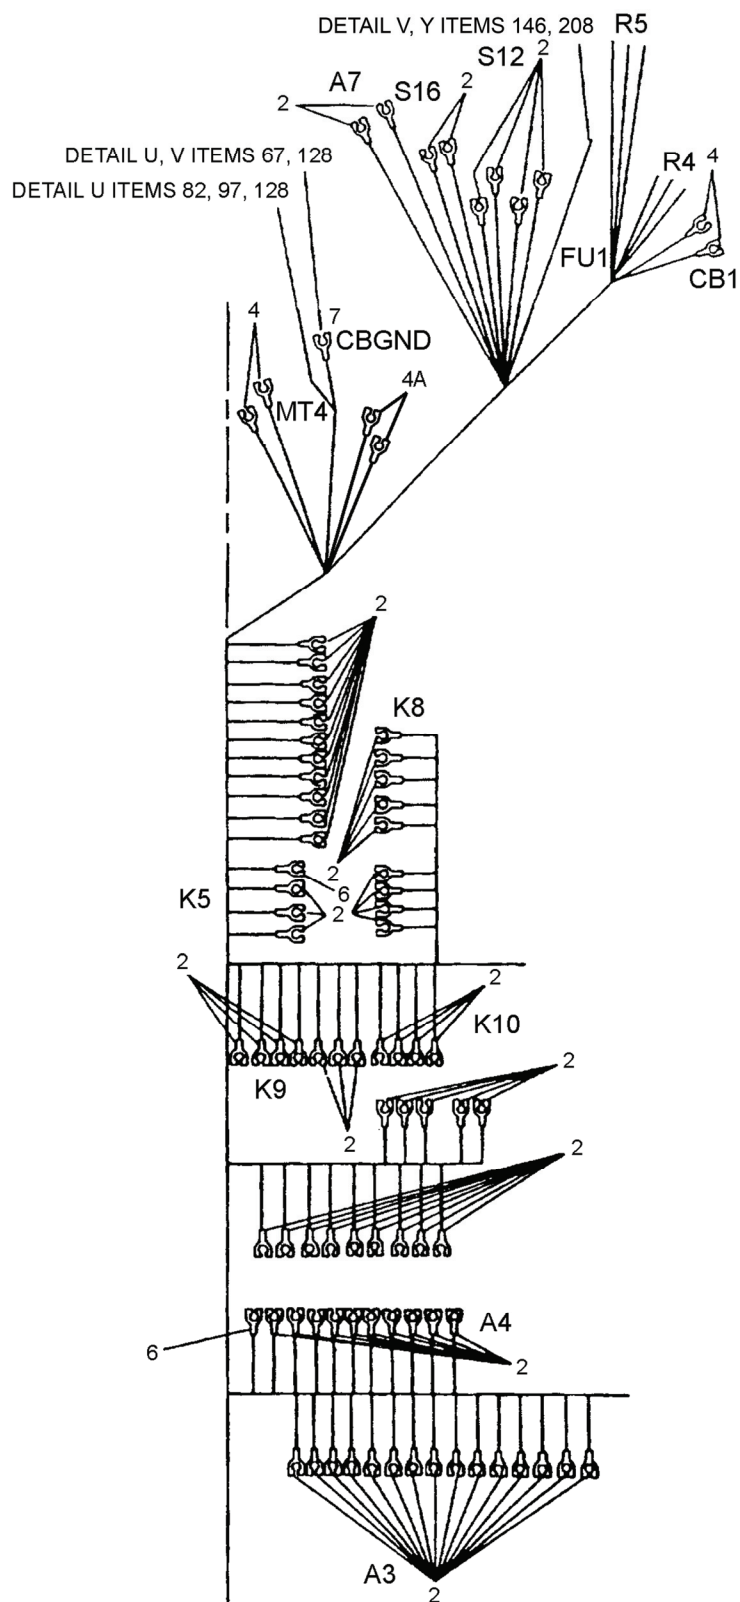


Figure 8. Control Box Harness Assembly (Sheet 3 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

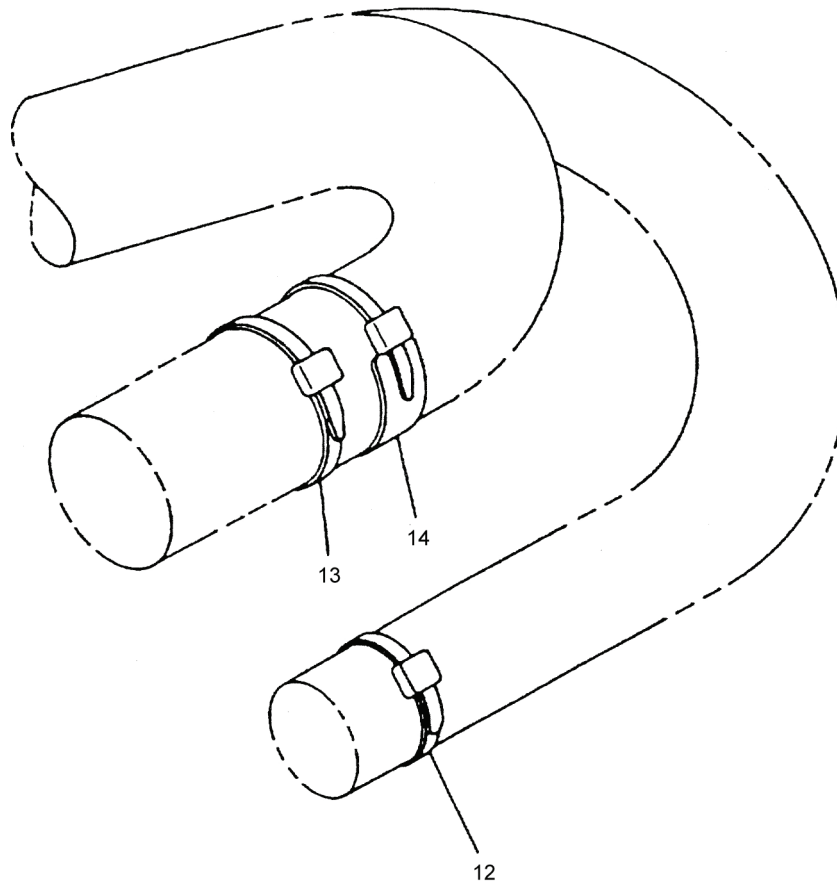

DETAIL A
(TYPICAL INSTALLATION)

Figure 8. Control Box Harness Assembly (Sheet 4 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

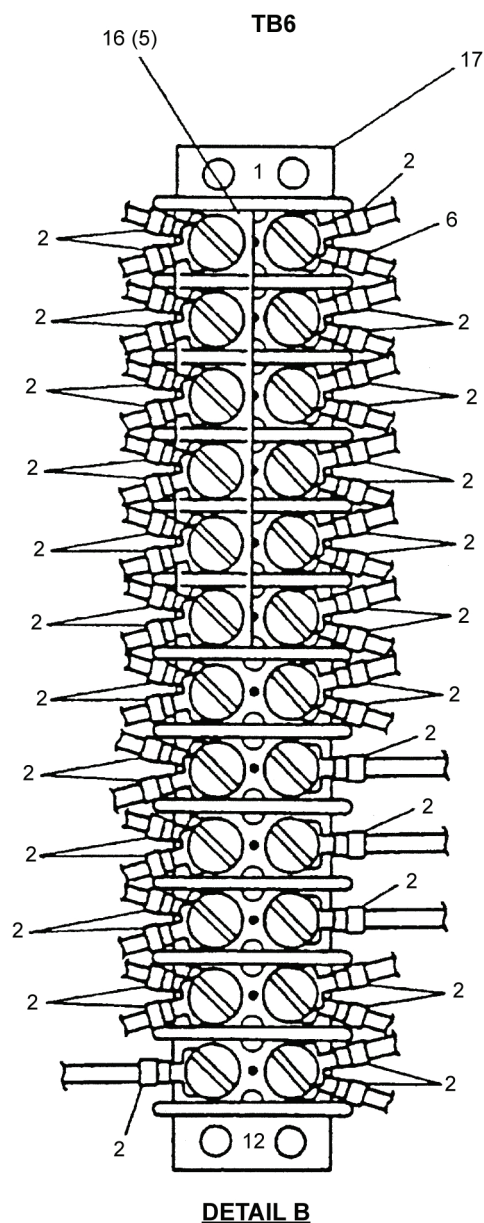


Figure 8. Control Box Harness Assembly (Sheet 5 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

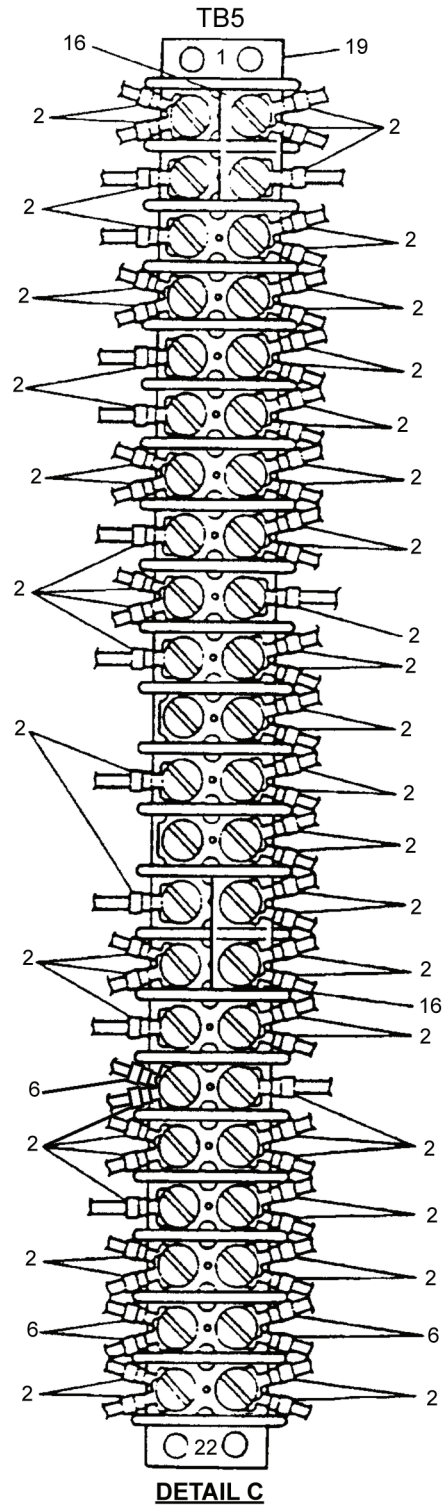


Figure 8. Control Box Harness Assembly (Sheet 6 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

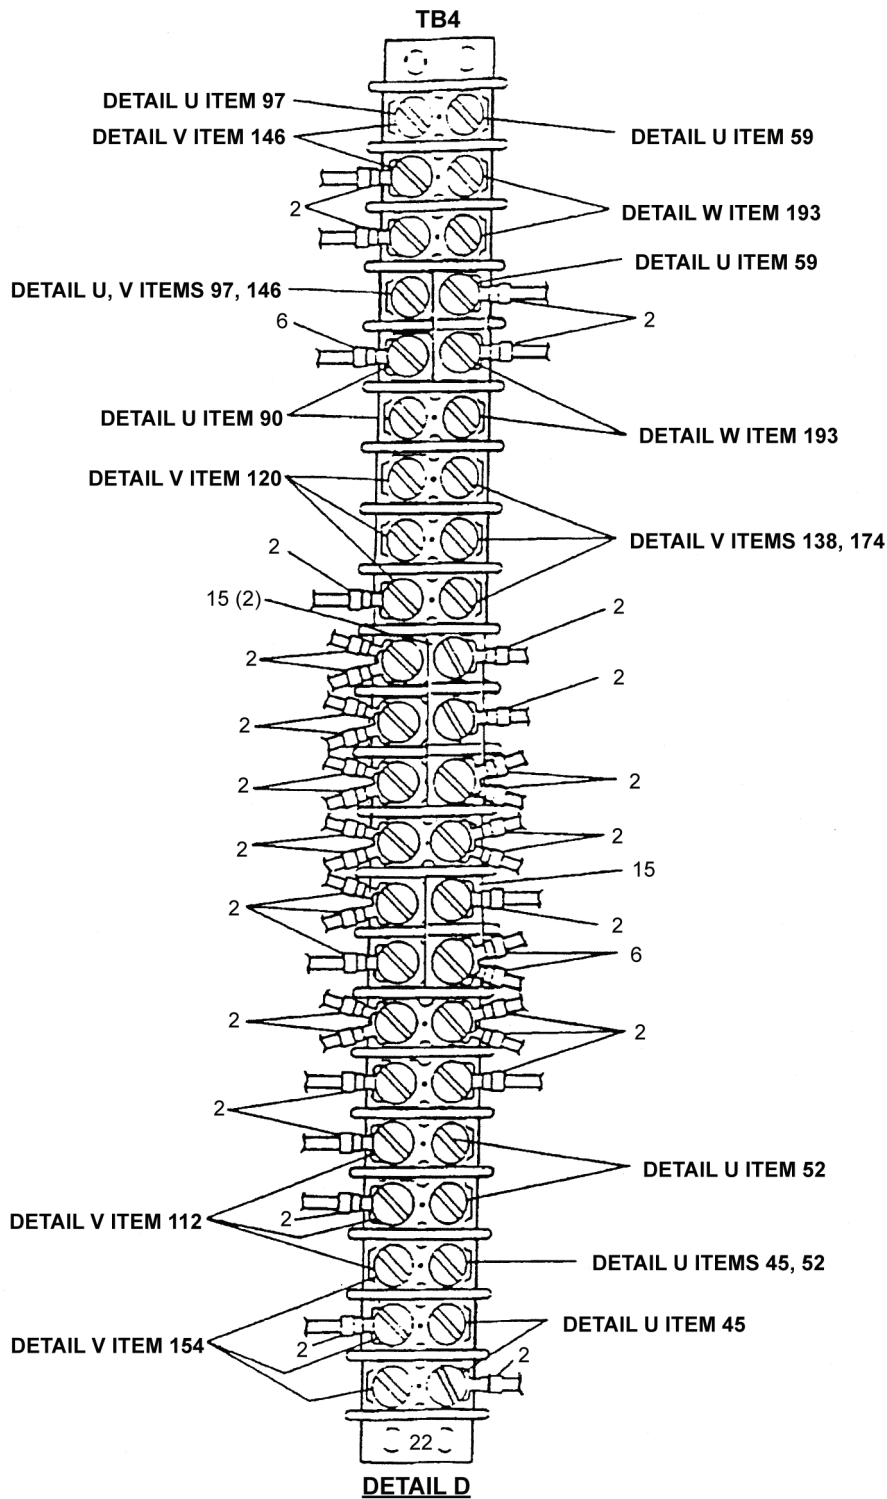


Figure 8. Control Box Harness Assembly (Sheet 7 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

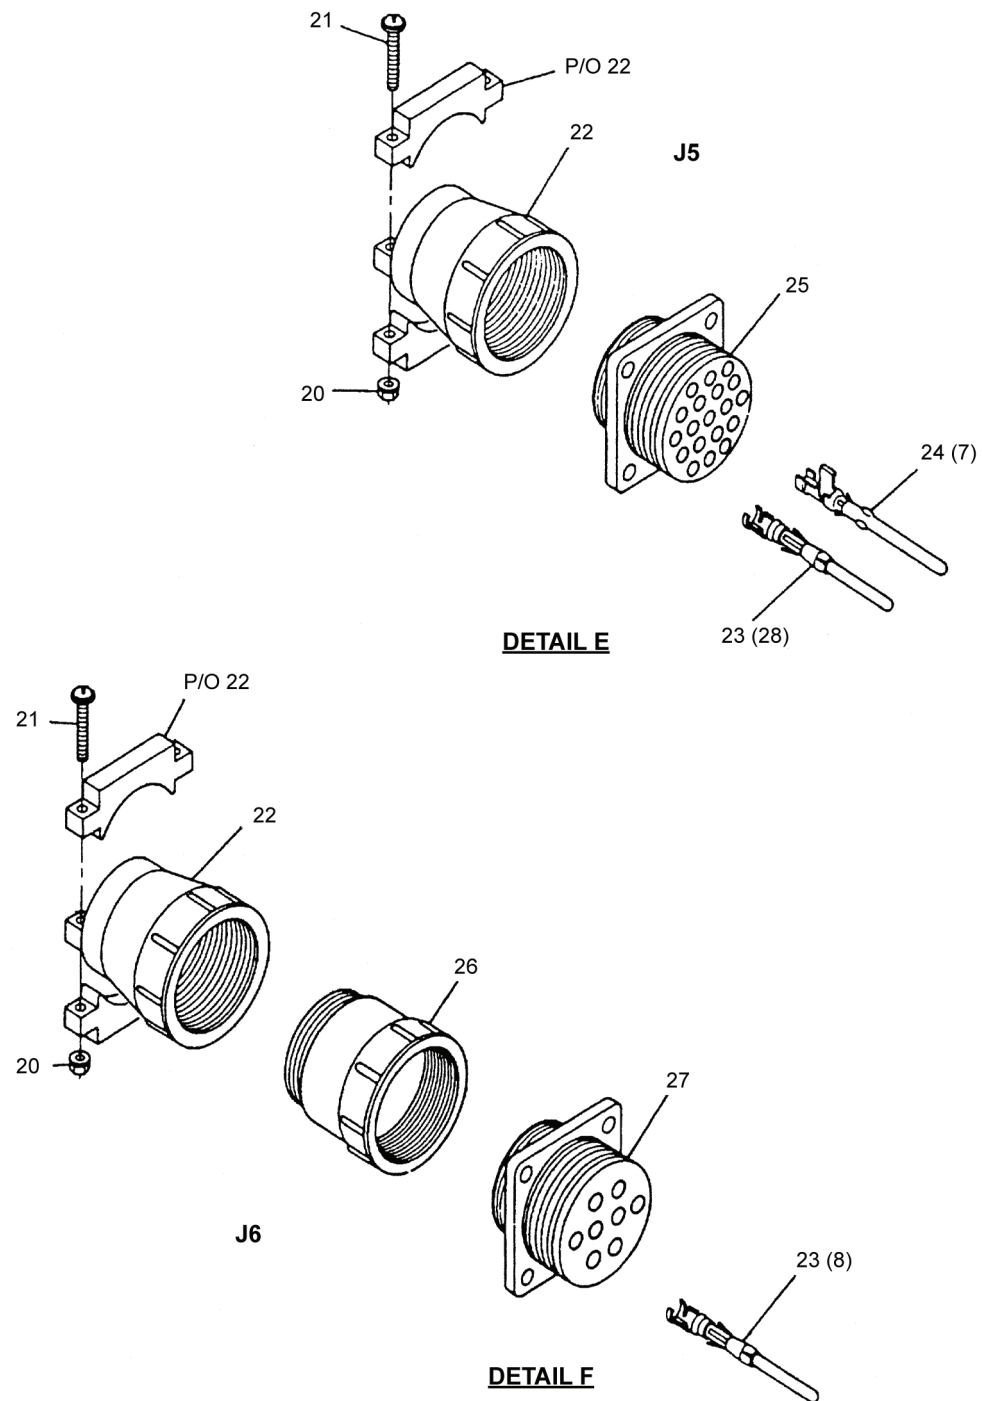


Figure 8. Control Box Harness Assembly (Sheet 8 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

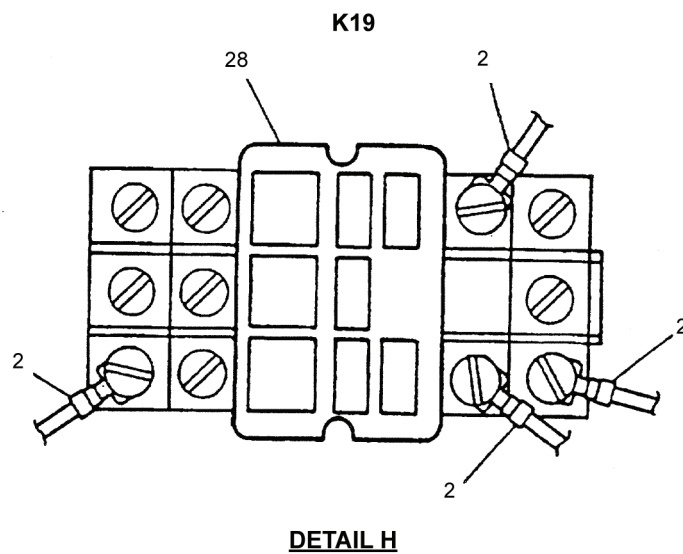
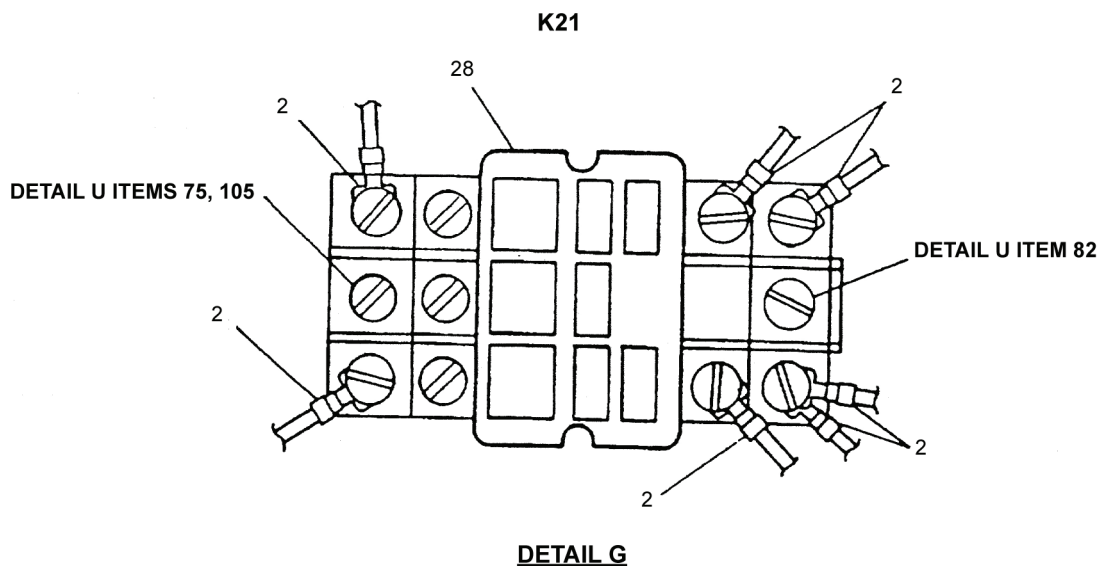


Figure 8. Control Box Harness Assembly (Sheet 9 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

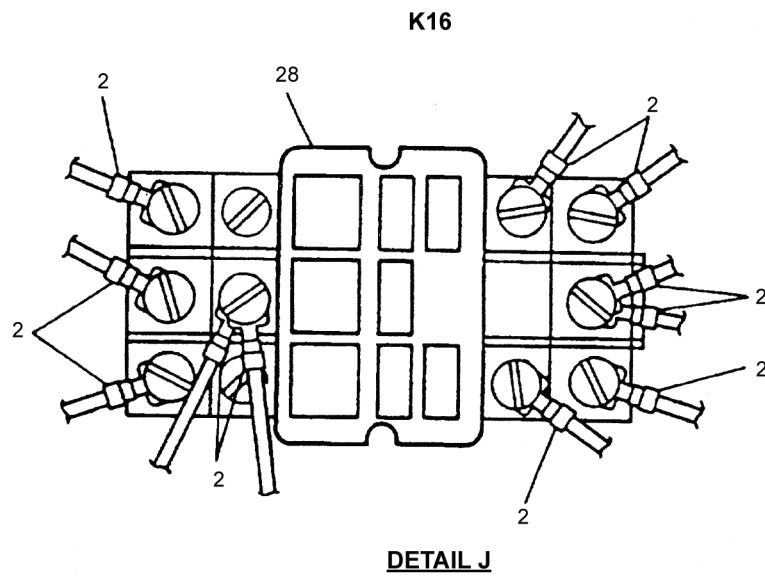
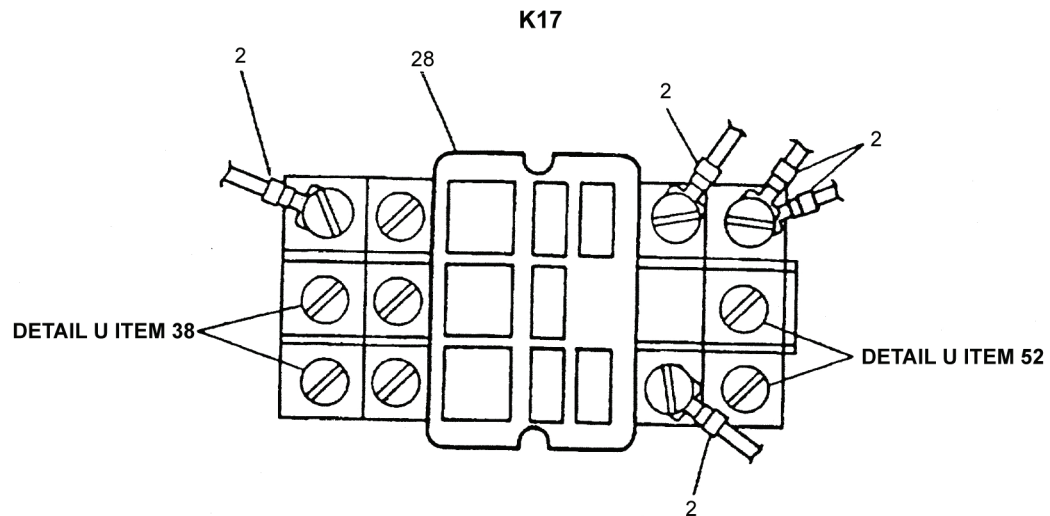


Figure 8. Control Box Harness Assembly (Sheet 10 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)



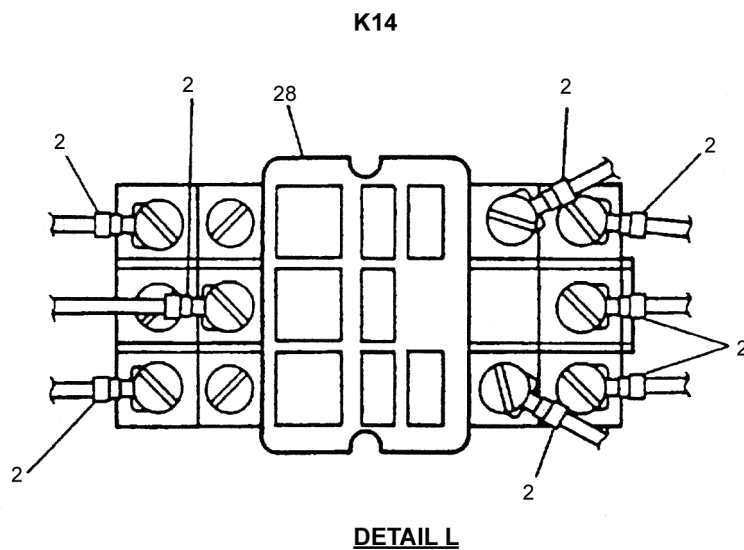



Figure 8. Control Box Harness Assembly (Sheet 11 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

K13
DETAIL M

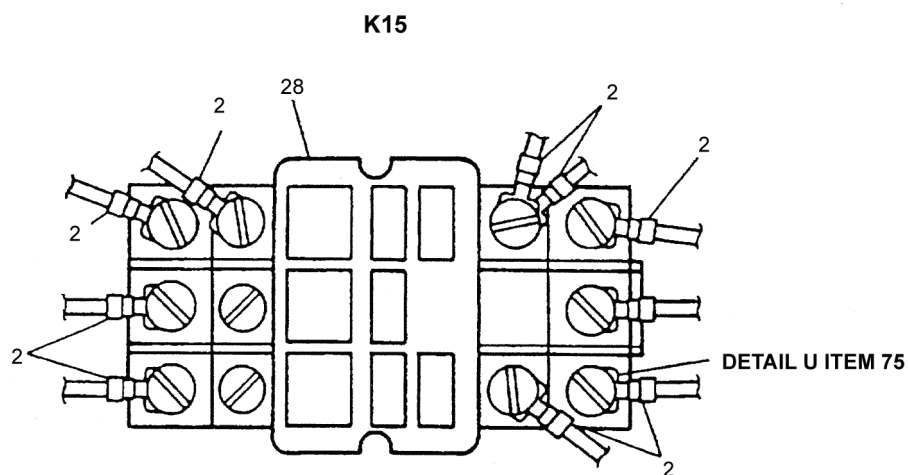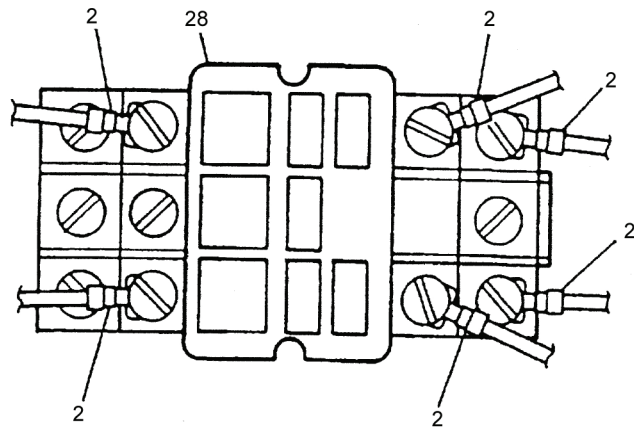

K12
DETAIL N

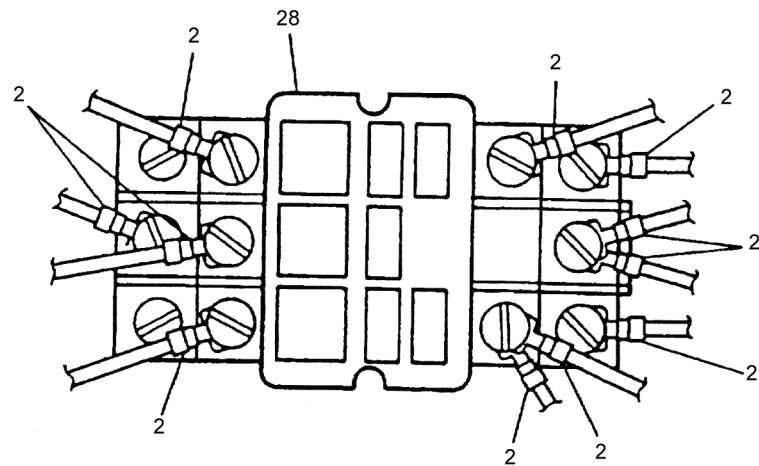

K11
DETAIL O



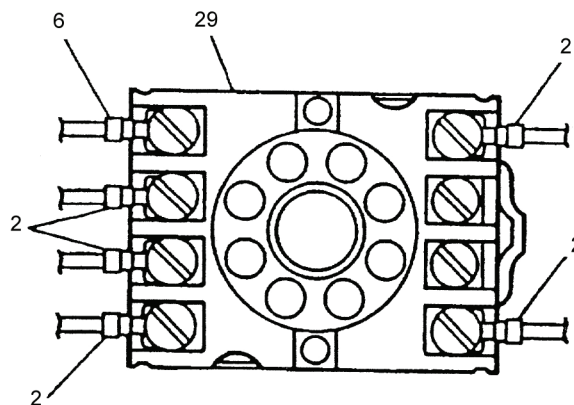


Figure 8. Control Box Harness Assembly (Sheet 12 of 25).


SECTION II. REPAIR PARTS LIST (CONTINUED)



DETAIL P




DETAIL Q

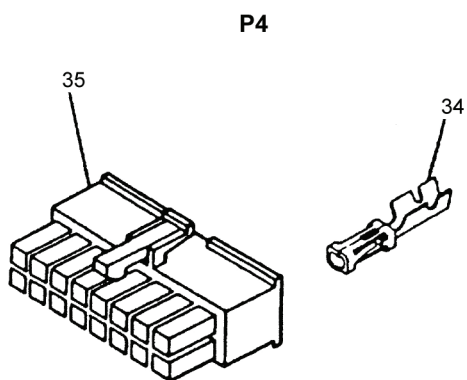

DETAIL R

CR6, CR7, CR8



DETAIL S

Figure 8. Control Box Harness Assembly (Sheet 13 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

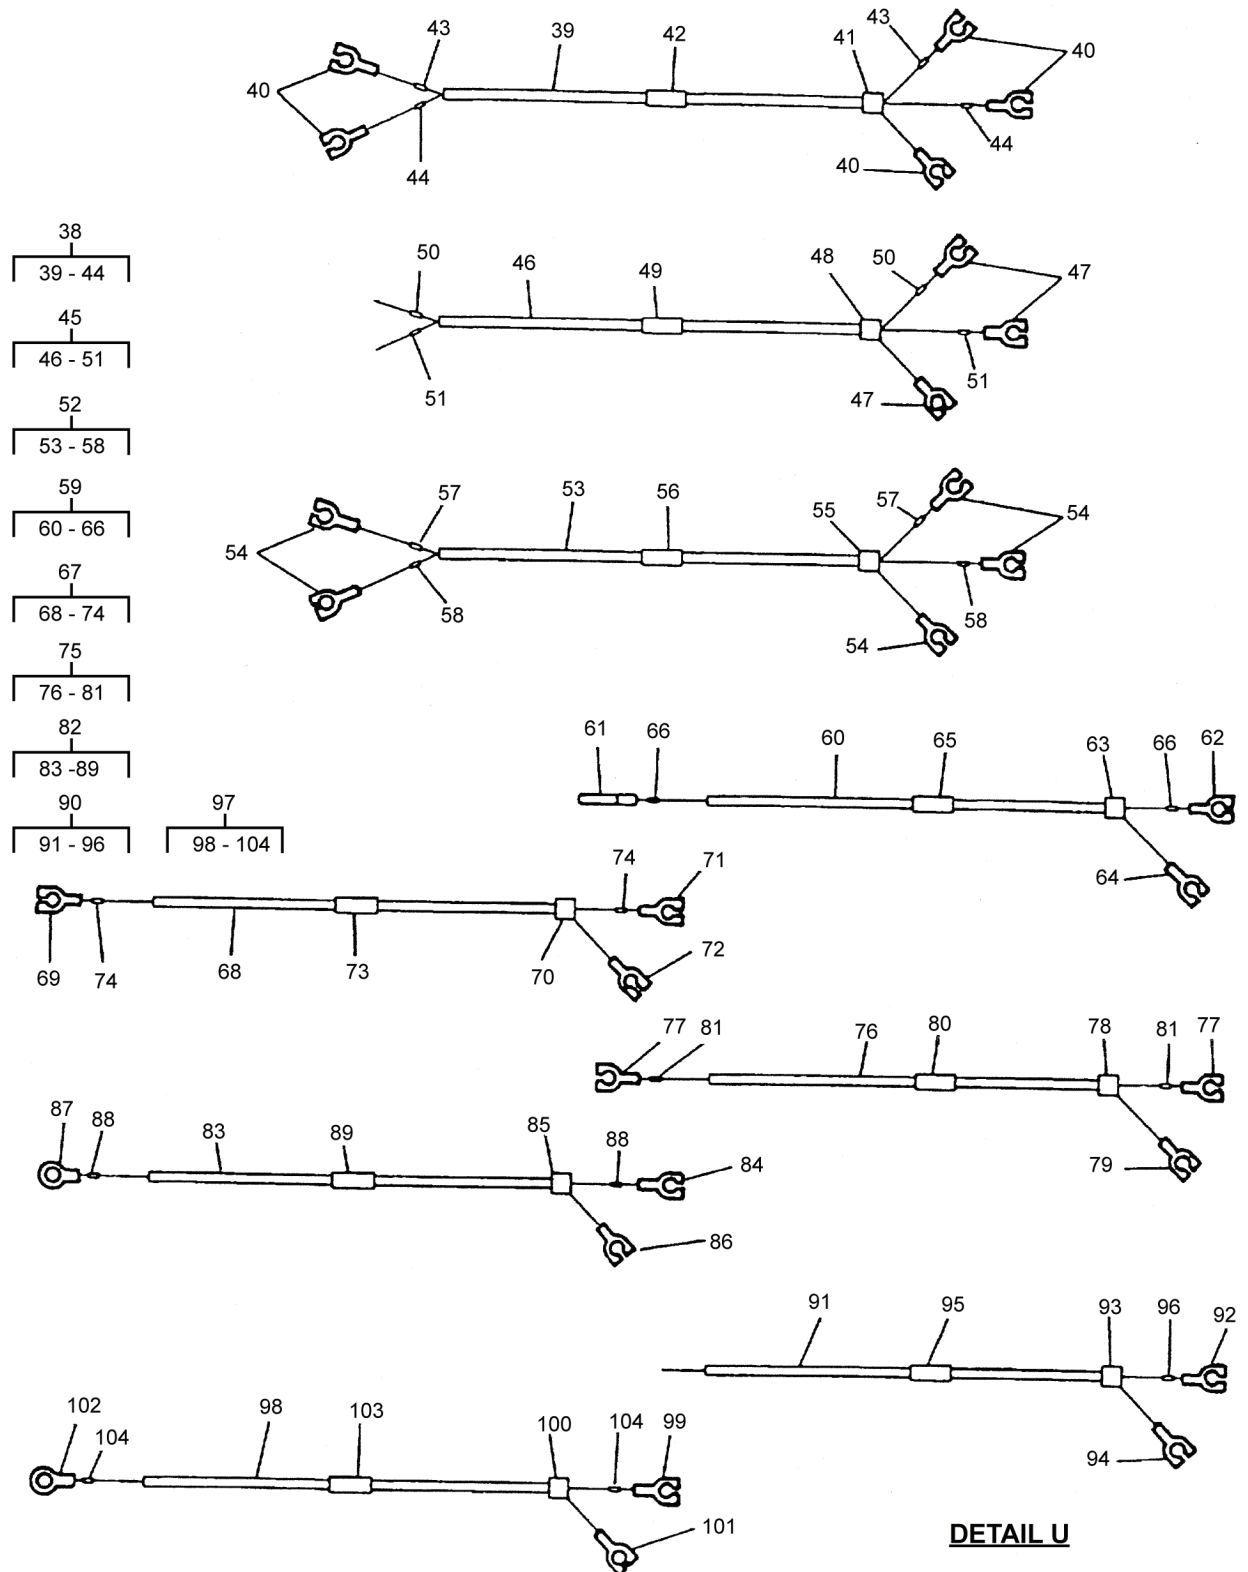


Figure 8. Control Box Harness Assembly (Sheet 14 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

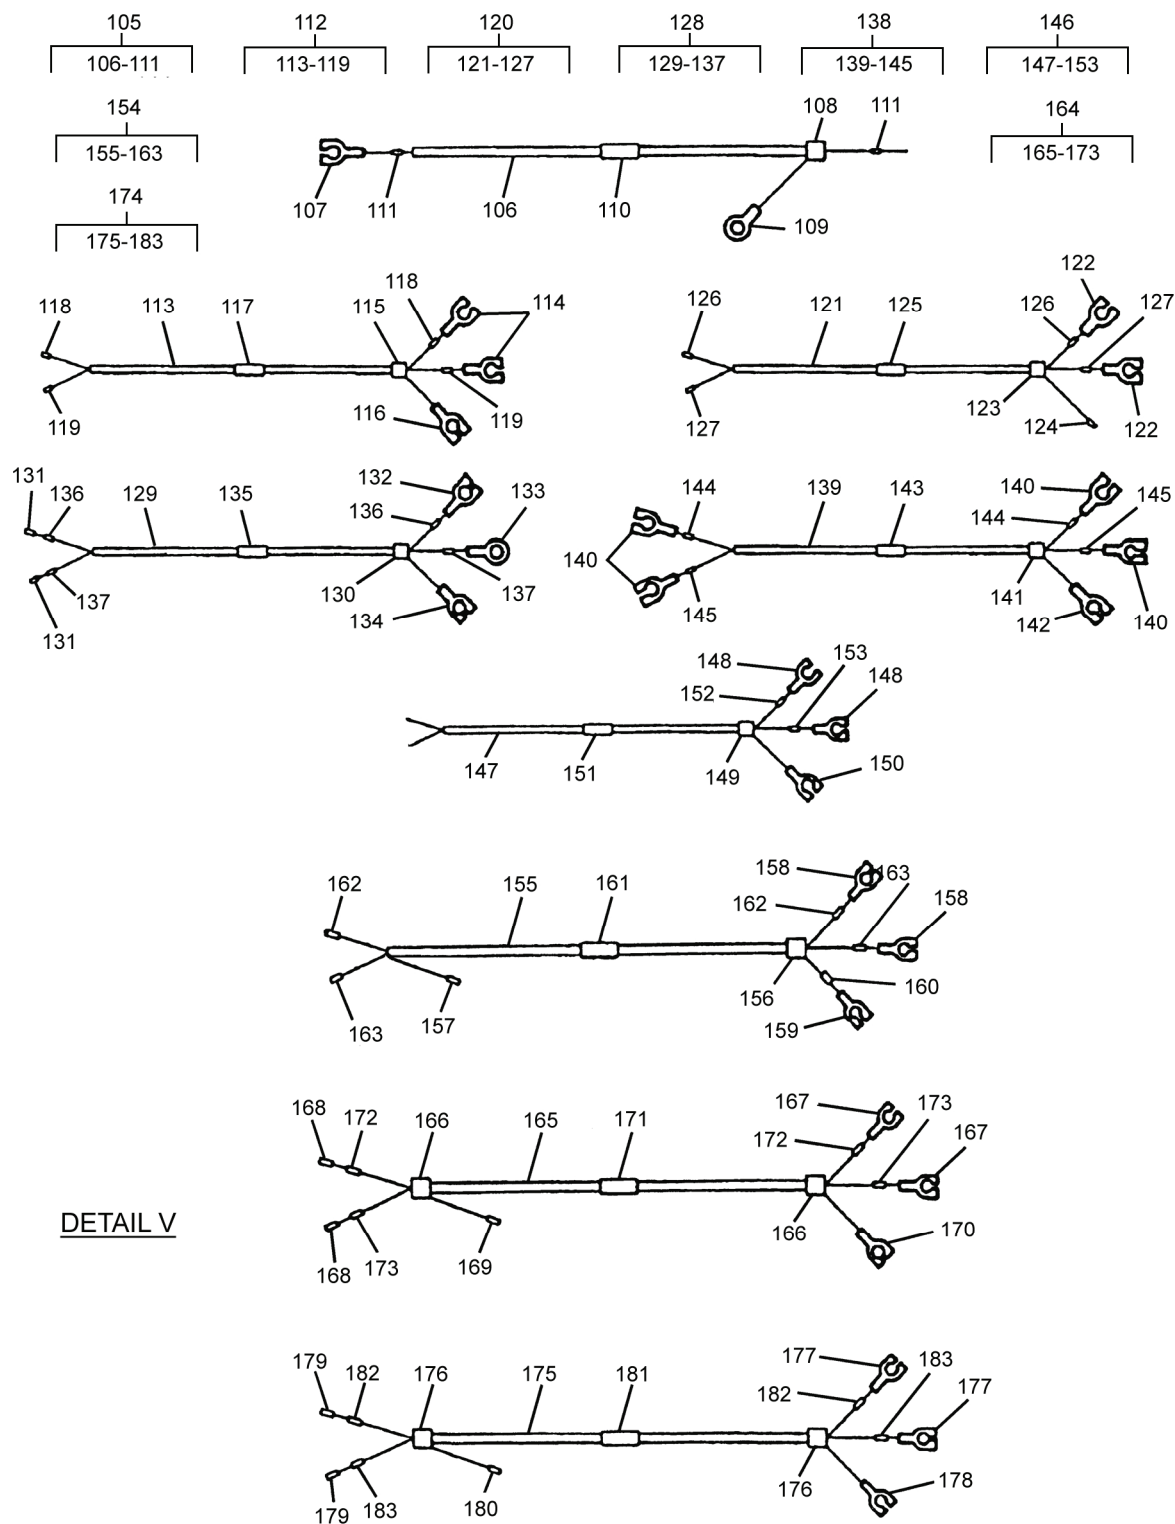


Figure 8. Control Box Harness Assembly (Sheet 15 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

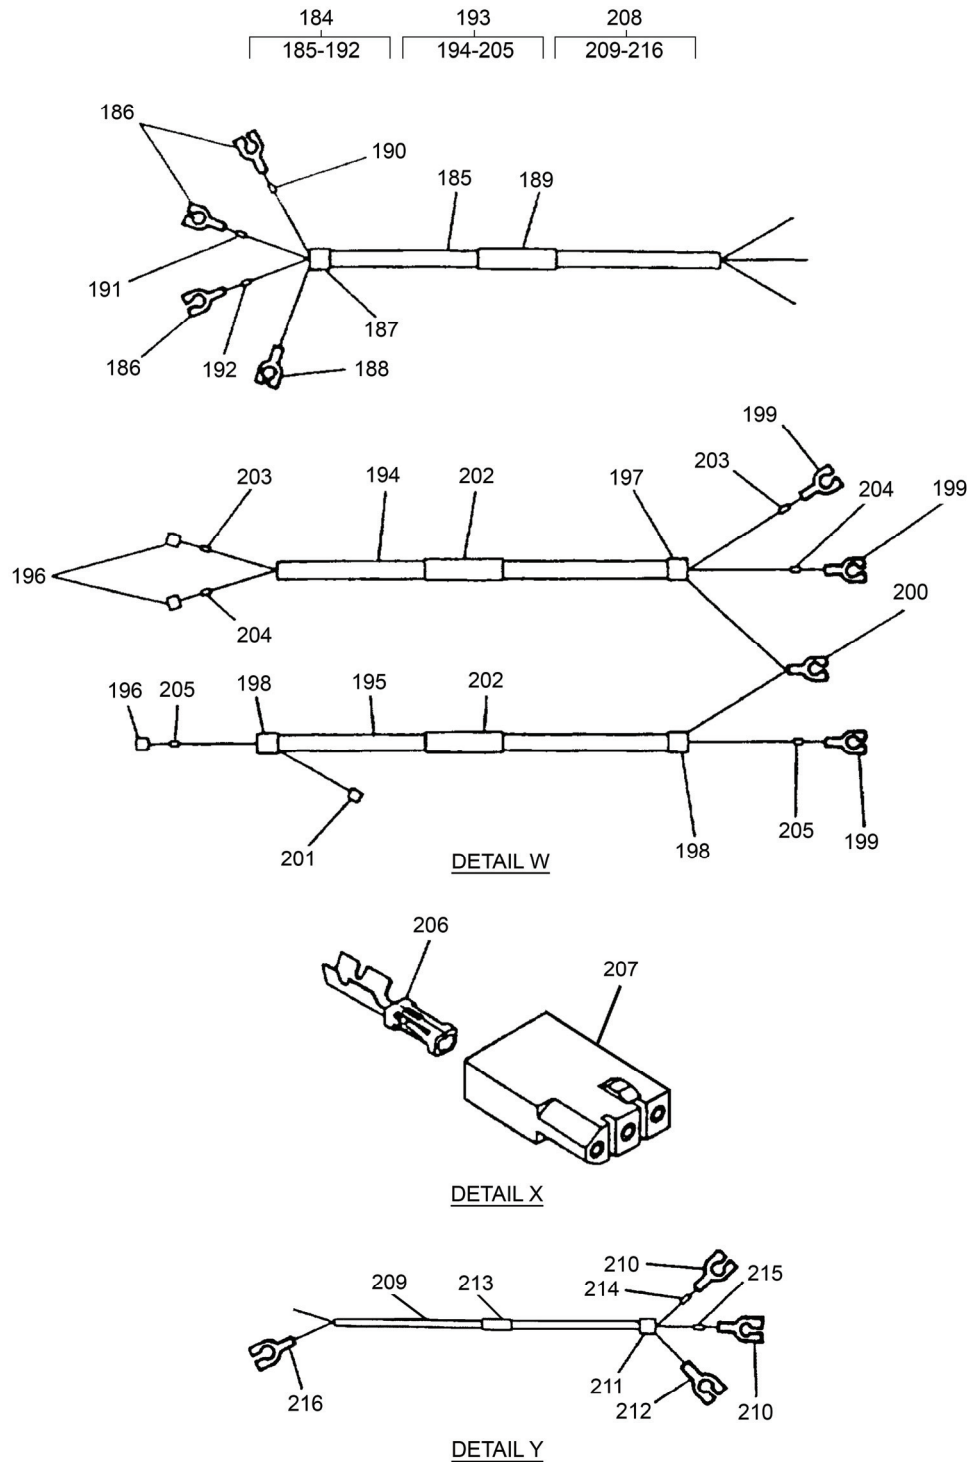


Figure 8. Control Box Harness Assembly (Sheet 16 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
1	100AA20	J3-GND	8	TB6-1	2	15	RED	36.5
2	100AB20	M3 (-)	2	TB6-2	2	15	RED	37.0
3	100AC20	K12-B	2	TB6-3	2	15	RED	14.5
4	100AD20	J2-GND	9	TB6-6	2	15	RED	37.0
5	100AE20	K13-B	2	TB6-4	2	15	RED	22.0
6	100AF20	P4-5	34	TB6-5	2	15	RED	20.0
7	100AG20	P4-12	34	TB6-5	2	15	RED	20.0
8	100AH20	DS1-2	2	TB6-1	2	15	RED	40.0
9	100AJ20	DS2-2	2	TB6-2	2	15	RED	35.0
10	100AK20	DS3-2	2	TB6-3	2	15	RED	43.0
11	100AL20	M6-G	4	M5-G	4	15	RED	9.0
12	100AM20	M7-G	4	M6-G	4	15	RED	17.0
13	100AN20	M5-G	4	TB6-1	2	15	RED	41.0
14	100AP20	DS6-3	TIN	TB6-6	2	15	RED	30.0
15	100AR12	J2-E	—	J2-GND	10	33	RED	6.0
16	100AS20	TB6-2	2	K9-4	2	15	RED	24.0
17	100AT20	K9-4	2	K10-4	2	15	RED	5.0
18	100AV16	J1-1	11	TB6-1	6	18	RED	21.5
19	100AY20	DS7-3	TIN	TB6-3	2	15	RED	40.0
20	100AZ20	S7-8	2	TB6-2	2	15	RED	43.0
21	100F20	TB6-6	2	TB4-5	2	15	RED	19.0
22	100G16	TB4-5	6	CBGND	7	18	RED	14.0
23	100H20	A5-GP	5	TB4-4	2	15	RED	17.0
24	100T20	K10-7	2	TB6-5	2	15	RED	25.0
25	100U20	K14-7	2	TB6-5	2	15	RED	17.0
26	100V20	K21-B	2	TB6-4	2	15	RED	24.0
27	100W20	K15-9	2	TB6-4	2	15	RED	26.0
28	100X20	CPGND	4	TB6-3	2	15	RED	33.0
29	100Y20	K16-B	2	TB6-4	2	15	RED	18.5
30	100Z20	TB6-6	2	TB4-9	2	15	RED	21.5
31	101C20	J5-1	23	TB4-17	2	15	BLACK	13.0
32	101D20	S6-10	2	TB4-17	2	15	BLACK	32.5
33	100BC20	J3-B	—	K10-4	2	15	BLACK	43.0
34	102C20	J5-2	23	TB6-11	2	15	BLACK	31.0
35	102D20	K10-1	2	TB6-11	2	15	BLACK	31.5
36	102E20	S6-6	2	TB6-11	2	15	BLACK	34.5
37	102F20	DS5-1	2	TB6-11	2	15	BLACK	31.0
38	NOT USED							
39	103C20	J5-3	23	TB6-10	2	15	BLACK	31.0
40	103D20	DS4-1	2	TB6-10	2	15	BLACK	29.0
41	103E20	S6-2	2	TB6-10	2	15	BLACK	35.0
42	NOT USED							
43	185K20	J5-4	23	TB5-20	2	15	RED	24.5
44	NOT USED							
45	185J20	K17-A	2	TB5-20	2	15	RED	10.0
46	185H20	J3-V	—	TB5-20	2	15	RED	38.0
47	105B20	J5-5	23	TB5-3	2	15	RED	34.0

Figure 8. Control Box Harness Assembly (Sheet 17 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

FIG. 8 – WIRE LIST TABLE

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
48	NOT USED							
49	105D20	K13-1	2	TB5-3	2	15	RED	12.0
50	105E20	DS7-2	TIN	TB5-3	2	15	RED	46.0
51	106B16	J5-6	24	K11-7	6	18	BLACK	34.0
52	107D16	J5-36	24	TB5-21	6	18	BLACK	23.0
53	107E16	A4-1	6	TB5-21	6	18	BLACK	18.0
54	107F20	A4-1	2	A3-V1	2	15	BLACK	10.0
55	107G20	A3-V1	2	R1-R	TIN	15	BLACK	43.0
56	107H16	A7-L	6	TB5-21	6	18	BLACK	24.0
57	107J16	A7-L	6	K5-1	6	18	BLACK	21.0
58	NOT USED							
59	107M16	J5-37	24	TB5-21	6	18	BLACK	24.0
60	107N20	R1-R	TIN	R1-C	TIN	15	BLACK	4.0
61	108B20	J5-8	23	A4-2	2	15	BLACK	37.5
62	108C20	A4-2	2	A3-V2	2	15	BLACK	10.0
63	109C20	J5-9	23	TB5-22	2	15	BLACK	24.0
64	109D20	K11-2	2	TB5-22	2	15	BLACK	29.0
65	109E20	A4-3	2	TB5-22	2	15	BLACK	19.0
66	109F20	A4-3	2	A3-V3	2	15	BLACK	10.0
67	109G20	A1-4	2	TB5-22	2	15	BLACK	25.0
68	NOT USED							
69	110E16	J5-10	24	TB4-15	6	18	BLACK	16.0
70	110F16	J5-11	24	TB4-15	6	18	BLACK	17.0
71	110G20	S6-12	2	TB4-14	2	15	BLACK	29.5
72	110H20	A4-8	2	TB4-14	2	15	BLACK	20.5
73	110J20	A4-8	2	A3-N1	2	15	BLACK	18.0
74	110K20	A4-9	2	A3-N2	2	15	BLACK	16.5
75	110L20	A4-10	2	A3-N3	2	15	BLACK	15.0
76	110M20	A7-L	2	TB4-14	2	15	BLACK	20.0
77	110N20	K5-6	2	TB4-15	2	15	BLACK	20.0
78	NOT USED							
79	NOT USED							
80	111B20	J5-12	23	K8-1	2	15	BLACK	19.0
81	111C20	K8-1	2	A4-4	2	15	BLACK	29.0
82	111D20	A4-4	2	R10-1	TIN	15	BLACK	25.0
83	111B20	J5-13	23	A3-L1	2	15	BLACK	41.5
84	113B20	J5-14	23	K8-2	2	15	BLACK	18.0
85	113C20	K8-2	2	A4-5	2	15	BLACK	29.0
86	113D20	A4-5	2	R11-1	TIN	15	BLACK	25.5
87	114B20	J5-15	23	A3-L2	2	15	BLACK	39.0
88	115B20	J5-16	23	K3-8	2	15	BLACK	19.5
89	115C20	K8-3	2	A4-6	2	15	BLACK	29.0
90	115D20	A4-6	2	R12-1	TIN	15	BLACK	23.0
91	116B20	J5-17	23	A3-L3	2	15	BLACK	41.0
92	117A20	A3-S1	2	S6-16	2	15	BLACK	38.0

Figure 8. Control Box Harness Assembly (Sheet 18 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

FIG. 8 – WIRE LIST TABLE

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
93	118A20	A3-S2	2	S6-20	2	15	BLACK	38.0
94	119A20	A3-S3	2	S6-24	2	15	BLACK	37.0
95	120A20	A3 (+)	2	M9 (+)	3	15	BLACK	34.0
96	NOT USED							
97	122C20	J5-19	23	TB5-13	2	15	BLACK	25.0
98	NOT USED							
99	122E20	R9-1	TIN	TB5-13	2	15	BLACK	22.0
100	123C20	J5-20	23	TB5-11	2	15	BLACK	27.5
101	NOT USED							
102	123E20	R7-1	TIN	TB5-11	2	15	BLACK	24.0
103	124A20	A3 (-)	2	M9 (-)	3	15	BLACK	38.0
104	125B20	J6-23	23	J3-X	-	15	RED	64.5
105	126A20	S16-3	2	K14-4	2	15	RED	48.0
106	127A20	A5-20	2	K15-7	2	15	RED	32.0
107	128A20	K16-2	2	K15-1	2	15	RED	20.0
108	129B20	S1-3	2	TB4-10	2	15	RED	27.0
109	129C20	TB4-10	2	M5-1	4	15	RED	15.0
110	129E20	M5-1	4	M6-1	4	15	RED	7.0
111	129F20	M6-1	4	M7-1	4	15	RED	11.0
112	129G20	R15-1	TIN	TB4-12	2	15	RED	30.0
113	129H20	K12-8	2	TB4-12	2	15	RED	18.5
114	129J20	K19-A	2	TB4-11	2	15	RED	19.0
115	129K20	P4-15	34	TB4-11	2	15	RED	26.0
116	129L20	P4-14	34	TB4-11	2	15	RED	26.0
117	129N20	K10-3	2	TB4-12	2	15	RED	14.5
118	129P20	TB4-12	2	K9-3	2	15	RED	11.5
119	129S20	CR6-1	TIN	TB4-10	2	15	RED	7.0
120	NOT USED							
121	131A20	J5-22	23	A1-10	2	15	BLACK	31.0
122	132A20	J5-23	23	A1-6	2	15	BLACK	31.0
123	133A20	J5-24	23	A1-12	2	15	BLACK	29.0
124	134A20	A1-8	2	K17-7	2	15	BLACK	33.0
125	135A20	A1-9	2	TB5-4	2	15	BLACK	34.5
126	135B20	R5-R	TIN	TB5-4	2	15	BLACK	33.5
127	135C20	J5-25	23	TB5-4	2	15	BLACK	31.0
128	135D20	S11-5	2	TB5-4	2	15	BLACK	26.0
129	136A20	S12-5	2	R1-L	TIN	15	BLACK	45.0
130	137A20	S12-4	2	A1-5	2	15	BLACK	34.0
131	NOT USED							
132	NOT USED							
128	135D20	S11-5	2	TB5-4	2	15	BLACK	26.0
129	136A20	S12-5	2	R1-L	TIN	15	BLACK	45.0
130	137A20	S12-4	2	A1-5	2	15	BLACK	34.0
131	NOT USED							
132	NOT USED							

Figure 8. Control Box Harness Assembly (Sheet 19 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

FIG. 8 – WIRE LIST TABLE

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
133	138A20	J5-26	23	A1-7	2	15	BLACK	27.0
134	139A20	J5-27	23	A1-11	2	15	BLACK	28.0
135	140A20	A1-3	2	TB4-13	2	15	BLACK	19.0
136	140B20	J3-J	—	TB4-13	2	15	BLACK	45.0
137	140C20	J5-28	23	TB4-13	2	15	BLACK	17.0
138	140F20	K15-6	2	TB4-13	2	15	BLACK	42.5
139	141A20	A1-1	2	TB4-16	2	15	BLACK	18.0
140	141B20	J3-F	—	TB4-16	2	15	BLACK	47.0
141	141C20	J5-29	23	TB4-16	2	15	BLACK	16.0
142	141E20	CR2-2	TIN	TB4-16	2	15	BLACK	40.0
143	142B20	J5-30	23	TB6-12	2	15	BLACK	31.0
144	143C20	R5-C	TIN	TB4-21	2	15	BLACK	15.0
145	144C20	K17-4	2	TB4-22	2	15	BLACK	26.0
146	145C20	J3-G	—	TB4-18	2	15	BLACK	48.0
147	146C20	J3-C	—	TB4-19	2	15	BLACK	48.0
148	154A20	S12-2	2	A5-1	2	15	RED	31.0
149	155A20	A5-5	2	K21-4	2	15	RED	21.0
150	158A20	A5-12	2	A4-12	2	15	BLACK	36.0
151	158B20	K9-1	2	A4-12	2	15	BLACK	15.0
152	158C20	K9-1	2	R4-R	TIN	15	BLACK	25.0
153	159A20	A5-11	2	R4-C	TIN	15	BLACK	24.0
154	160A20	K15-8	2	A5-18	2	15	RED	31.0
155	161A20	A4-11	2	K9-2	2	15	BLACK	14.0
156	161B20	K9-2	2	R4-L	TIN	15	BLACK	25.0
157	162A20	CR1-2	TIN	S17-1	2	15	RED	45.0
158	164B20	J3-d	—	TB4-2	2	15	RED	41.0
159	166C20	J6-22	23	J3-N	—	15	RED	64.0
160	167C20	K15-5	2	TB5-5	2	15	RED	17.0
161	167D20	J6-21	23	TB5-5	2	15	RED	34.0
162	167E20	J3-T	—	TB5-5	2	15	RED	31.5
163	168D20	J6-5	23	TB5-7	2	15	RED	33.5
164	168E20	J3-b	—	TB5-7	2	15	RED	32.5
165	168F20	K14-8	2	TB5-7	2	15	RED	11.0
166	169B20	J6-20	23	TB5-8	2	15	RED	33.0
167	169C20	K16-7	2	TB5-8	2	15	RED	11.0
168	169D20	J3-a	—	TB5-8	2	15	RED	34.0
169	171A20	K19-B	2	TB5-6	2	15	RED	15.5
170	171B20	J6-19	23	TB5-6	2	15	RED	33.0
171	171C20	J3-Z	—	TB5-6	2	15	RED	32.0
172	172A20	S1-1	2	TB5-9	2	15	RED	26.0
173	172B20	J3-Y	—	TB5-9	2	15	RED	35.0
174	172C20	J6-18	23	TB5-9	2	15	RED	32.0
175	173A20	J5-31	23	S1-5	2	15	RED	44.0
176	174D20	J5-32	23	J3-0	—	15	RED	61.0
177	175A20	J5-33	23	M5-S	4	15	RED	50.0

Figure 8. Control Box Harness Assembly (Sheet 20 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

FIG. 8 – WIRE LIST TABLE

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
178	176A20	J5-34	23	M6-S	4	15	RED	47.0
179	177A20	J5-35	23	M7-S	4	15	RED	44.0
180	179A20	MT4-2	4	M4 (+)	3	15	RED	37.0
181	180A20	CB1-1	4	TB5-2	2	15	RED	35.0
182	180B20	K14-A	2	TB5-1	2	15	RED	13.5
183	180C20	K14-9	2	TB5-1	2	15	RED	12.5
184	180D20	S1-8	2	TB5-1	2	15	RED	32.0
185	180E20	P4-4	34	TB5-1	2	15	RED	17.0
186	180F20	S2-2	2	S1-4	2	15	RED	29.0
187	NOT USED							
188	180H20	J3-U	—	TB5-2	2	15	RED	34.0
189	181A20	M2 (+)	3	A7 (+)	2	15	BLACK	34.0
190	182A20	M2 (—)	3	A7 (—)	2	15	BLACK	34.0
191	183A20	M8-1	3	S6-15	2	15	BLACK	11.0
192	184A20	M8-2	3	S6-17	2	15	BLACK	7.0
193	184B20	S6-13	2	K8-4	2	15	BLACK	31.0
194	184C20	K8-4	2	A4-7	2	15	BLACK	22.0
195	184D20	A4-7	2	R12-2	TIN	15	BLACK	32.0
196	185A20	K21-A	2	TB5-14	2	15	RED	14.0
197	185B20	CR4-2	TIN	TB5-15	2	15	RED	23.0
198	185C20	K21-6	2	TB5-14	2	15	RED	14.0
199	185D20	S12-3	2	TB5-15	2	17	RED	TBD
200	185E20	TB5-14	2	TB5-20	2	15	RED	6.5
201	185F20	A5-19	2	TB5-15	2	15	RED	31.0
202	185G20	TB5-15	2	M3 (+)	2	15	RED	TBD
203	186A20	M1 (—)	3	S6-7	2	15	BLACK	11.0
204	187A20	M1 (+)	3	S6-1	2	15	BLACK	15.0
205	188A20	S2-3	2	TB6-7	2	15	RED	32.0
206	188B20	DS1-1	2	TB6-7	2	15	RED	37.0
207	188C20	DS2-1	2	TB6-7	2	15	RED	42.0
208	188D20	DS3-1	2	TB6-7	2	15	RED	51.0
209	189A20	K15-B	2	CR8-1	TIN	15	RED	15.0
210	190A20	S1-7	2	TB6-8	2	15	RED	33.0
211	190B20	K15-A	2	TB6-8	2	15	RED	29.5
212	190C20	CR4-1	TIN	TB6-8	2	15	RED	9.0
213	190E20	J3-P	—	K15-A	2	15	RED	55.5
214	191A16	J5-18	24	J1-2	11	18	BLACK	52.5
215	NOT USED							
216	193A16	J5-21	24	J1-3	11	18	BLACK	53.0
217	194A20	K11-3	2	R7-2	TIN	15	BLACK	20.0
218	195A20	DS4-2	2	S11-12	2	15	BLACK	12.0
219	196A20	DS5-2	2	K10-2	2	15	BLACK	20.0
220	196B20	K10-2	2	S11-9	2	15	BLACK	16.0
221	197A20	S11-11	2	TB5-10	2	15	BLACK	23.0
222	197B20	R6-1	TIN	TB5-10	2	15	BLACK	24.0

Figure 8. Control Box Harness Assembly (Sheet 21 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

FIG. 8 – WIRE LIST TABLE

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
223	197C20	K11-1	2	TB5-10	2	15	BLACK	11.0
224	198A20	S11-8	2	TB5-12	2	15	BLACK	22.0
225	198B20	R8-1	TIN	TB5-12	2	15	BLACK	23.0
226	198C20	K11-8	2	TB5-12	2	15	BLACK	12.5
227	199A20	S5-3	2	K8-11	2	15	RED	20.0
228	200A20	K11-6	2	R9-2	TIN	15	BLACK	18.5
229	201A20	MT4-3	4	M4 (-)	3	15	RED	39.0
230	202A20	P4-3	34	K12-9	2	15	RED	39.0
231	203A20	P4-9	34	K5-3	2	15	RED	23.0
232	204A20	P4-10	34	K16-9	2	15	RED	43.5
233	205A20	P4-11	34	K8-9	2	15	RED	31.0
234	206A20	P4-13	34	S7-4	2	15	RED	40.0
235	207A20	CB1-2	4	S17-2	2	15	RED	53.0
236	208A20	P4-17	34	K9-6	2	15	RED	11.0
237	209A20	P4-18	34	K8-6	2	15	RED	27.0
238	168G20	TB5-7	2	K8-5	2	15	RED	17.0
239	168H20	K5-2	2	K19-6	2	15	RED	42.0
240	168J20	K5-2	2	K8-10	2	15	RED	19.0
241	168K20	K8-10	2	K9-5	2	15	RED	24.0
242	168L20	K9-5	2	K5-7	2	15	RED	21.5
243	168M20	K5-7	2	K8-5	2	15	RED	19.0
244	212A20	K12-3	2	K13-3	2	15	RED	4.5
245	NOT USED							
246	214A20	P4-1	34	J16-4	2	15	RED	41.0
247	215A20	P4-7	34	K14-6	2	15	RED	40.0
248	NOT USED							
249	NOT USED							
250	217A20	K16-6	2	K5-8	2	15	RED	43.0
251	NOT USED							
252	220A20	P4-2	34	K19-9	2	15	RED	46.0
253	221A20	S7-5	2	TB5-16	2	15	RED	26.0
254	NOT USED							
255	221C20	K12-A	2	TB5-16	2	15	RED	11.0
256	221D20	K12-5	2	TB5-16	2	15	RED	14.5
257	NOT USED							
258	223A20	J6-6	23	P4-8	34	15	RED	47.0
259	NOT USED							
260	NOT USED							
261	225E20	J3-S	-	TB5-17	2	15	RED	36.5
262	NOT USED							
263	225G20	K21-9	2	TB5-17	2	15	RED	11.5
264	225H20	K21-9	2	K12-2	2	15	RED	24.0
265	228A20	S7-7	2	K12-7	2	15	RED	59.0
266	NOT USED							
267	NOT USED							

Figure 8. Control Box Harness Assembly (Sheet 22 of 25)

SECTION II. REPAIR PARTS LIST (CONTINUED)

FIG. 8 – WIRE LIST TABLE

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
268	NOT USED							
269	NOT USED							
270	233A20	K14-B	2	TB5-19	2	15	RED	14.5
271	233B20	K21-7	2	TB5-19	2	15	RED	12.0
272	233C20	S16-2	2	TB5-19	2	15	RED	22.0
273	234A20	K15-4	2	R14-1	TIN	15	RED	21.0
274	239A20	DS7-1	TIN	TB6-9	2	15	RED	30.0
275	239B20	R15-2	TIN	TB6-9	2	15	RED	9.5
276	239C20	DS6-1	TIN	TB6-9	2	15	RED	36.0
277	240B20	J5-7	23	TB5-18	2	15	RED	27.0
278	240C20	K17-B	2	TB5-18	2	15	RED	8.5
279	240D20	S5-5	2	TB5-18	2	15	RED	19.5
280	240E20	CR3-1	TIN	TB5-18	2	15	RED	18.0
281	241A20	S7-9	2	DS6-2	TIN	15	RED	8.0
282	242A20	S5-2	2	CR3-2	TIN	15	RED	42.5
283	129R20	K12-8	2	K16-5	2	15	RED	11.0
284	248C20	CR6-2	TIN	TB4-3	2	15	RED	7.0
285	249A20	K16-A	2	K16-8	2	15	RED	3.0
286	134B20	K17-7	2	S11-4	2	15	BLACK	52.0
287	135F20	A1-9	2	S11-2	2	15	BLACK	51.0
288	142A20	TB6-12	2	R5-L	TIN	15	BLACK	33.0
289	142D20	TB6-12	2	S11-1	2	15	BLACK	28.0
290	250A20	K12-1	2	CR8-2	TIN	15	RED	3.0
291	128B20	K16-2	2	CR7-1	TIN	15	RED	6.0
292	249B20	K16-8	2	CR7-2	TIN	15	RED	6.0
293	100BD20	J3-D	—	K12-B	2	15	RED	50.0
294	301A20	K13-7	2	K8-12	2	15	RED	47.0
295	302A20	P4-16	34	S7-1	2	15	RED	42.0
296	303A20	K13-A	2	S7-2	2	15	RED	63.0
297	305A20	K13-9	2	K14-2	2	15	RED	19.5
298	306A20	S5-6	2	K10-8	2	15	RED	27.0
299	NOT USED							
USABLE ON 86Q, 86R ONLY								
300	225N16	J61-1	206	TB5-17	6	18	RED	45.0
301	164N16	J61-2	206	CB2-2	11	18	RED	30.0
302	165R16	J61-3	206	MT4-4	4A	18	RED	28.0
303	163K16	MT4-1	4A	CB2-1	11	18	RED	21.0

Figure 8. Control Box Harness Assembly (Sheet 23 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

SHIELDED CABLE CONNECTION TABLE						
CABLE ITEM NO.	WIRE	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	WIRE LENGTH
38	(SHIELD)	(CUTOFF)	-	A5-15	40	27.5
	156A20	K17-5	40	A5-14	40	27.5
	157A20	K17-6	40	A5-13	40	27.5
45	(SHIELD)	(CUTOFF)	-	TB4-20	40	56.0
	143B20	J3-H	40	TB4-21	40	56.0
	144B20	J3-E	40	TB4-22	40	56.0
52	(SHIELD)	(CUTOFF)	-	TB4-20	40	17.0
	145A20	K17-8	40	TB4-18	40	17.0
	146A20	K17-9	40	TB4-19	40	17.0
59	(SHIELD)	(CUTOFF)	-	TB4-4	64	26.0
	163C16	J6-7	61	TB4-1	62	26.0
67	(SHIELD)	CBGND	72	(CUTOFF)	-	26.0
	100J16	CBGND	69	A5-4	71	26.0
75	(SHIELD)	K15-9	79	(CUTOFF)	-	27.0
	151A16	K21-5	77	A5-3	77	27.0
82	(SHIELD)	(CUTOFF)	-	A5-GP	86	30.0
	165G16	MT4-4	87	K21-8	84	30.0
90	(SHIELD)	(CUTOFF)	-	TB4-5	94	39.0
	178C16	CR1-1	-	TB4-6	92	39.0
97	(SHIELD)	(CUTOFF)	-	TB4-4	101	13.5
	163A16	MT4-1	102	TB4-1	99	13.5
105	(SHIELD)	J3-GND	109	(CUTOFF)	-	55.0
	151B16	J3-M	107	K21-5	-	55.0
112	(SHIELD)	(CUTOFF)	-	TB4-20	116	46.0
	145B16	J2-A	-	TB4-18	114	46.0
	146B16	J2-B	-	TB4-19	114	46.0
120	(SHIELD)	(CUTOFF)	-	TB4-9	124	44.0
	147D16	J3-y	-	TB4-7	122	44.0
	148D16	J3-x	-	TB4-8	122	44.0
128	(SHIELD)	(CUTOFF)	-	CBGND	134	20.0
	100E16	J6-1	131	CBGND	132	20.0
	165D16	J6-2	131	MT4-4	133	20.0
138	(SHIELD)	(CUTOFF)	-	TB4-9	142	12.0
	147C16	A5-16	140	TB4-7	140	12.0
	148C16	A5-17	140	TB4-8	140	12.0
146 UOC: EMK, YNN	(SHIELD)	(CUTOFF)	-	TB4-4	150	19.5
	163B16	FU1-1	-	TB4-1	148	19.5
	164A16	FU1-2	-	TB4-2	148	19.5
154	(SHIELD)	K2-GND	157	TB4-20	159	46.0
	143A16	J2-C	-	TB4-21	158	46.0
	144A16	J2-D	-	TB4-22	158	46.0

Figure 8. Control Box Harness Assembly (Sheet 24 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

SHIELDED CABLE CONNECTION TABLE						
CABLE ITEM NO.	WIRE	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	WIRE LENGTH
164	(SHIELD)	J6-15	169	A5-GP	170	35.0
	149A16	J6-13	168	A5-10	167	35.0
	150A16	J6-14	168	A5-9	167	35.0
174	(SHIELD)	J6-12	180	TB4-9	178	23.0
	147A16	J6-10	179	TB4-7	177	23.0
	148A16	J6-11	179	TB4-8	177	23.0
184	(SHIELD)	A5-GP	188	(CUTOFF)	-	53.0
	152A20	A5-8	186	R2-L	-	53.0
	153A20	A5-6	186	R2-R	-	53.0
	192B20	A5-7	186	R2-C	-	53.0
193	(SHIELD)	J6-9	196	TB4-5	199	24.5
	(SHIELD)	(CUTOFF)	-	TB4-5	201	24.5
	164C16	J6-4	196	TB4-2	199	24.5
	178B16	J6-8	196	TB4-6	199	24.5
	248B16	J6-3	196	TB4-3	200	24.5
208 UOC: 86Q, 86R	(SHIELD)	(CUTOFF)	-	TB4-4	212	19.5
	163B16	CB2-1	216	TB4-1	210	19.5
	164A16	CB2-2	-	TB4-2	210	19.5

Figure 8. Control Box Harness Assembly (Sheet 25 of 25).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
							GROUP 03 - CONTROL BOX ASSEMBLY		
							FIG. 8 CONTROL BOX HARNESS ASSEMBLY		
1	PBOFF	PBOOO			30554	88-22303	..WIRING HARNESS, BRANCH UOC: EMK	1	
1	PBOFF	PBOOO			30554	88-22664	..WIRING HARNESS, BRANCH UOC: YNN	1	
1A	PBOFF	PBOOO			30554	97-24049	..WIRING HARNESS, BRANCH UOC: 86Q	1	
1A	PBOFF	PBOOO			30554	97-24060	..WIRING HARNESS, BRANCH UOC: 86R	1	
2	PAOZZ	PAOZZ			30554	88-20274-1	...TERMINAL, SPADE #6, 22-18 AWG UOC: EMK, 86Q	366	
2	PAOZZ	PAOZZ			30554	88-20274-1	...TERMINAL, SPADE #6 22-18 AWG UOC: YNN, 86R	360	
3	PAOZZ	PAOZZ			96906	MS25036-150	...TERMINAL, LUG 1/4, 22-18 AWG	10	
4	PAOZZ	PAOZZ			30554	88-20274-3	...TERMINAL, SPADE #8, 22-18 AWG	18	
4A	PAOZZ	PAOZZ			96906	MS25036-109	...TERMINAL, LUG 5/16, 16-14 AWG UOC: 86Q, 86R	2	
5	PAOZZ	PAOZZ			30554	88-20274-4	...TERMINAL, SPADE #10, 22-18 AWG	1	
6	PAOZZ	PAOZZ			30554	88-20274-5	...TERMINAL, SPADE #6, 16-14 AWG UOC: EMK, YNN	13	
6	PAOZZ	PAOZZ			30554	88-20274-5	...TERMINAL, SPADE #6, 16-14 AWG UOC: 86Q, 86R	14	
7	PAOZZ	PAOZZ			30554	88-20274-6	...TERMINAL, SPADE #10, 16-14 AWG	1	
8	PAOZZ	PAOZZ			96906	MS25036-149	...TERMINAL, LUG #8, 22-18 AWG	1	
9	PAOZZ	PAOZZ			96906	MS25036-148	...TERMINAL, LUG #4, 22-18 AWG	1	
10	PAOZZ	PAOZZ			30554	88-22071	...TERMINAL, LUG #4, 12-10 AWG	1	
11	PAOZZ	PAOZZ			30554	88-20274-11	...TERMINAL, SPADE #8, 16-14 AWG	3	
12	PAOZZ	PAOZZ			96906	MS3367-5-9	...STRAP, TIEDOWN, ELECT	V	
13	PAOZZ	PAOZZ			96906	MS3367-1-9	...STRAP, TIEDOWN, ELECT	V	
14	PAOZZ	PAOZZ			96906	MS3368-1-9A	...STRAP, TIEDOWN, ELECT	1	
15	MOOZZ	MOO			81349	M5086/2-20-9	...WIRE, ELECTRICAL	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
16	XDOZZ	XB			30554	88-21183-2	...CONTACT, ELECTRICAL	11	
17	XDOZZ	XB			30554	88-21181-12	...TERMINAL BLOCK TB6	1	
18	MOOZZ	MOO			81349	M5086/2-16-9	...WIRE, ELECTRICAL	1	
19	XDOZZ	XB			30554	88-21181-22	...TERMINAL BLOCK TB4 AND TB5	2	
20	PAOZZ	PAOZZ			30554	69-561-1	...NUT, PLAIN, ASSEMBLED	4	
21	PAOZZ	PAOZZ			30554	69-662-11	...SCREW, ASSEMBLED WAS	4	
22	PAOZZ	PAOZZ			30554	88-22312	...CLAMP, CABLE, ELECTRICAL	2	
23	PAOZZ	PAOZZ			30554	88-21941	...PIN	41	
24	PAOZA	PAOZA			30554	88-31943	...PIN	7	
25	PAOZZ	PAOZZ			30554	88-21939	...CONNECTOR BODY, RECEP, J5	1	
26	PAOZZ	PAOZZ			30554	88-22313	...EXTENSION, ELECTRICAL	1	
27	PAOZZ	PAOZZ			30554	88-21981	...CONNECTOR BODY, RECEP, J6	1	
28	PAOZZ	PAOZZ			30554	88-21084	...SOCKET, PLUG-IN, ELECT K12-K21	8	
29	PAOZZ	PAOZZ			30554	88-21897-1	...SOCKET, PLUG-IN, ELECT, K11	1	
30	PAOZZ	PAOZZ			96906	MS25251-16	...PLUG, END SEAL, ELECT	29	
31	PAOZZ	PAOZZ			19207	12258941	...CONNECTOR, RECEP, J3	1	
32	PAOZZ	PAOZZ			96906	MS3102R18- 11P	...PLUG, CONNECT, ELECT, J2	1	
33	MOOZZ	MOO			81349	M5086/2-12-9	..WIRE, ELECTRICAL	1	
34	PAOZZ	PAOZZ			30554	88-21730	...CONTACT, ELECTRICAL	17	
35	PAOZZ	PAOZZ			30554	88-21729	...CONNECTOR BODY, PLUG	1	
36	PAOZZ	PAOZZ			50434	1901-0759	...SEMICONDUCTOR DEVICE CR6, CR7, AND CR8	3	
37	MOOZZ	MOO			81349	M23053/5 -104-0	..INSULATION, SLEEVEING 1.25 INCHES REQUIRED	4	
38	AFFFF	AOO			30554	88-22098-1	...CABLE ASSY, SHIELDED	1	
39	MFFZZ	MOO			30554	88-22098-1-1	CABLE, SHIELDED MAKE FROM P/N M27500-20TE2T14 (81349), 27.5 INCHES REQUIRED	1	
40	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	5	
41	PAFZZ	PAOZZ			30554	88-20596-2	SHIELD, TERMINATION CUT WIRE LEAD TO 3 INCHES	1	
42	MFFZZ	MOO			30554	88-22629-004	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
43	MFFZZ	MOO			30554	88-22629-002	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
44	MFFZZ	MOO			30554	88-22629-005	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
45	AFFFF	AOO			30554	88-22098-2	...CABLE ASSY, SHIELDED	1	
46	MFFZZ	MOO			30554	88-22098-2-1	CABLE, SHIELDED MAKE FROM P/N M27500-20TE2T14 (81349), 56 INCHES REQUIRED	1	
47	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	3	
48	PAFZZ	PAOZZ			30554	88-20596-2	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES.	1	
49	MFFZZ	MOO			30554	88-22629-006	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	1	
50	MFFZZ	MOO			30554	88-22629-007	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
51	MFFZZ	MOO			30554	88-22629-008	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
52	AFFFF	AOO			30554	88-22098-3	...CABLE ASSY, SHIELDED	1	
53	MFFZZ	MOO			30554	88-22098-3-1	CABLE, SHIELDED MAKE FROM P/N M27500-20TE2T14 (81349), 17 INCHES REQUIRED	1	
54	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	5	
55	PAFZZ	PAOZZ			30554	88-20596-2	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	
56	MFFZZ	MOO			30554	88-22629-009	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	1	
57	MFFZZ	MOO			30554	88-22629-010	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	2	
58	MFFZZ	MOO			30554	88-22629-011	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	2	
59	AFFFF	AOO			30554	88-22099-1	...CABLE ASSY, SHIELDED	1	
60	MFFZZ	MOO			30554	88-22099-1-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE1T14 (81349), 26 INCHES REQUIRED	1	
61	PAOZA	PAOZA			30554	88-21943	PIN	1	
62	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	1	
63	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	
64	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
65	MFFZZ	MOO			30554	88-22629-012	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	1	
66	MFFZZ	MOO			30554	88-22629-013	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	2	
67	AFFFF	AOO			30554	88-22099-2	...CABLE ASSY, SHIELDED	1	
68	MFFZZ	MOO			30554	88-22099-2-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE1T14 (81349), 26 INCHES REQUIRED	1	
69	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	1	
70	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 2 INCHES	1	
71	PAOZZ	PAOZZ			30554	88-20274-6	TERMINAL, SPADE #10, 16-14 AWG	1	
72	PAOZZ	PAOZZ			30554	88-20274-4	TERMINAL, SPADE #10, 22-18 AWG	1	
73	MFFZZ	MOO			30554	88-22629-014	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
74	MFFZZ	MOO			30554	88-22629-015	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
75	AFFFF	AOO			30554	88-22099-3	...CABLE ASSY, SHIELDED	1	
76	MFFZZ	MOO			30554	88-22099-3-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE1T14 (81349), 27 INCHES REQUIRED	1	
77	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	2	
78	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 3 INCHES	1	
79	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	
80	MFFZZ	MOO			30554	88-22629-016	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
81	MFFZZ	MOO			30554	88-22629-017	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
82	AFFFF	AOO			30554	88-22099-7	...CABLE ASSY, SHIELDED	1	
83	MFFZZ	MOO			30554	88-22099-7-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE1T14 (81349), 30 INCHES REQUIRED	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
84	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	1	
85	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 6 INCHES	1	
86	PAOZZ	PAOZZ			30554	88-20274-6	TERMINAL, SPADE #10, 16-14 AWG	1	
87	PAOZZ	PAOZZ			96906	MS25036-154	TERMINAL, LUG	1	
88	MFFZZ	MOO			30554	88-22629-019	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
89	MFFZZ	MOO			30554	88-22629-024	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
90	AFFFF	AOO			30554	88-22099-5	...CABLE ASSY, SHIELDED	1	
91	MFFZZ	MOO			30554	88-22099-5-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE1T14 (81349), 39 INCHES REQUIRED	1	
92	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	1	
93	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	
94	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	
95	MFFZZ	MOO			30554	88-22629-020	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
96	MFFZZ	MOO			30554	88-22629-021	MARKER IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
97	AFFFF	AOO			30554	88-22099-6	...CABLE ASSY, SHIELDED	1	
98	MFFZZ	MOO			30554	88-22099-6-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE1T14 (81349), 3.5 INCHES REQUIRED	1	
99	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	1	
100	MFFZZ	MOO			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	
101	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	
102	PAOZZ	PAOZZ			96906	MS25036-154	TERMINAL, LUG	1	
103	MFFZZ	MOO			30554	88-22629-022	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
104	MFFZZ	MOO			30554	88-22629-023	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	2	
105	AFFFF	AOO			30554	88-22100	...CABLE ASSY, SHIELDED	1	
106	MFFZZ	MOO			30554	88-22100-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE1T14 (81349), 55 INCHES REQUIRED	1	
107	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	1	
108	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 6 INCHES	1	
109	PAOZZ	PAOZZ			96906	MS25036-149	TERMINAL, LUG #8, 22-18 AWG	1	
110	MFFZZ	MOO			30554	88-22629-025	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	1	
111	MFFZZ	MOO			30554	88-22629-026	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	2	
112	AFFFF	AOO			30554	88-22101-1	...CABLE ASSY, SHIELDED	1	
113	MFFZZ	MOO			30554	88-22101-1-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 46 INCHES REQUIRED	1	
114	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	2	
115	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	
116	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	
117	MFFZZ	MOO			30554	88-22629-027	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
118	MFFZZ	MOO			30554	88-22629-028	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
119	MFFZZ	MOO			30554	88-22629-029	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
120	AFFFF	AOO			30554	88-22101-2	...CABLE ASSY, SHIELDED	1	
121	MFFZZ	MOO			30554	88-22101-2-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 44 INCHES REQUIRED	1	
122	PAOZZ	PAOZZ			30544	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	2	
123	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
124	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	
125	MFFZZ	MOO			30554	88-22629-030	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
126	MFFZZ	MOO			30554	88-22629-031	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
127	MFFZZ	MOO			30554	88-22629-032	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
128	AFFFF	AOO			30554	88-22101-3	...CABLE ASSY, SHIELDED	1	
129	MFFZZ	MOO			30554	88-22101-3-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 20.0 INCHES REQUIRED	1	
130	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	
131	PAOZA	PAOZA			30554	88-21943	PIN	2	
132	PAOZZ	PAOZZ			30554	88-20274-6	TERMINAL, SPADE #10, 16-14 AWG	1	
133	PAOZZ	PAOZZ			96906	MS25036-154	TERMINAL, LUG	1	
134	PAOZZ	PAOZZ			30554	88-20274-4	TERMINAL, SPADE #10, 22-18 AWG	1	
135	MFFZZ	MOO			30554	88-22629-033	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
136	MFFZZ	MOO			30554	88-22629-034	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
137	MFFZZ	MOO			30554	88-22629-035	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
138	AFFFF	AOO			30554	88-22101-4	...CABLE ASSY, SHIELDED	1	
139	MFFZZ	MOO			30554	88-22101-4-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 12 INCHES REQUIRED	1	
140	PAFZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	4	
141	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	
142	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
143	MFFZZ	MOO			30554	88-22629-036	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
144	MFFZZ	MOO			30554	88-22629-037	MARKER, IDENTIFICATION BMV 8 144 MAKE FROM P/N M23053/5-105-9 (81349), 1.25 IN. REQD	2	
145	MFFZZ	MOO			30554	88-22629-038	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
146	AFFFF	AOO			30554	88-22101-5	...CABLE ASSY, SHIELDED UOC: EMK, YNN	1	
147	MFFZZ	MOO			30554	88-22101-5-1	CABLE, SHIELDED, MAKE FROM P/N M27500-16TE2T14 (81349), 19.5 INCHES REQUIRED UOC: EMK, YNN	1	
148	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG UOC: EMK, YNN	2	
149	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES UOC: EMK, YNN	1	
150	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG UOC: EMK, YNN	1	
151	MFFZZ	MOO			30554	88-22629-039	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED UOC: EMK, YNN	1	
152	MFFZZ	MOO			30554	88-22629-040	MARKER IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED UOC: EMK, YNN	1	
153	MFFZZ	MOO			30554	88-22629-041	MARKER IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED UOC: EMK, YNN	1	
154	AFFFF	AOO			30554	88-22102-1	...CABLE ASSY, SHIELDED	1	
155	MFFZZ	MOO			30554	88-22102-1-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 46.0 INCHES REQUIRED	1	
156	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7) USMC QTY PER EQUIP
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	
157	PAOZZ	PAOZZ			96906	MS25036-152	TERMINAL, LUG	1	
158	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	2	
159	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	
160	MFFZZ	MOO			30554	88-22102-1-12	INSULATION, SLEEVING BMV 8 160 MAKE FROM P/N M23053/5-105-0 (81349), 4.0 INCHES REQD	1	
161	MFFZZ	MOO			30554	88-22629-053	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
162	MFFZZ	MOO			30554	88-22629-054	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
163	MFFZZ	MOO			30554	88-22629-055	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
164	AFFFF	AOO			30554	88-22102-2	...CABLE ASSY, SHIELDED	1	
165	MFFZZ	MOO			30554	88-22102-2-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 35 INCHES REQUIRED	1	
166	PAFZZ	PAOZZ			30544	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 6 INCHES FOR WIRE TERMINATING AT A5-GP, CUT WIRE LEAD TO 7 INCHES	2	
167	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	2	
168	PAOZA	PAOZA			30554	88-21943	PIN	2	
169	PAOZZ	PAOZZ			30554	88-21941	PIN	1	
170	PAOZZ	PAOZZ			30554	88-20274-4	TERMINAL, SPADE #10, 22-18 AWG	1	
171	MFFZZ	MOO			30554	88-22629-056	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
172	MFFZZ	MOO			30554	88-22629-057	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
173	MFFZZ	MOO			30554	88-22629-058	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
174	AFFFF	AOO			30554	88-22102-3	...CABLE ASSY, SHIELDED	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
175	MFFZZ	MOO			30554	88-22102-3-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 23 INCHES REQUIRED	1	
176	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES FOR WIRE TERMINATING AT TB4-9. CUT WIRE LEAD TO 7 INCHES	2	
177	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	2	
178	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	
179	PAOZA	PAOZA			30554	88-21943	PIN	2	
180	PAOZZ	PAOZZ			30554	88-21941	PIN	1	
181	MFFZZ	MOO			30554	88-22629-059	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
182	MFFZZ	MOO			30554	88-22629-060	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
183	MFFZZ	MOO			30554	88-22629-061	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
184	AFFFF	AOO			30554	88-22104	...CABLE ASSY, SHIELDED	1	
185	MFFZZ	MOO			30554	88-22104-1	CABLE, SHIELDED MAKE FROM P/N M27500-20TE3T14 (81349), 53 INCHES REQUIRED	1	
186	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	3	
187	PAFZZ	PAOZZ			30554	88-20596-3	SHIELD, TERMINATION CUT WIRE LEAD TO 7 INCHES	1	
188	PAOZZ	PAOZZ			30554	88-20274-4	TERMINAL, SPADE #10, 22-18 AWG	1	
189	MFFZZ	MOO			30554	88-22629-077	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
190	MFFZZ	MOO			30554	88-22629-078	MARKER IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
191	MFFZZ	MOO			30554	88-22629-079	MARKER IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7) USMC QTY PER EQUIP
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	
192	MFFZZ	MOO			30554	88-22629-080	MARKER IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
193	AFFFF	AOO			30554	88-22630	...CABLE ASSY, SHIELDED	1	
194	MFFZZ	MOO			30554	88-22630-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 24.5 INCHES REQUIRED	1	
195	MFFZZ	MOO			30554	88-22630-2	CABLE, SHIELDED MAKE FROM P/N M27500-16TE1T14 (81349), 23.5 INCHES REQUIRED	1	
196	PAOZA	PAOZA			30554	88-21943	PIN	3	
197	PAFZZ	PAOZZ			30554	88-20596-2	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES	1	
198	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 7 INCHES FOR WIRE TERMINATING AT J6-9. CUT WIRE LEAD TO 4	2	
199	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG	3	
200	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG	1	
201	PAOZZ	PAOZZ			30554	88-21941	PIN	1	
202	MFFZZ	MOO			30554	88-22629-085	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
203	MFFZZ	MOO			30554	88-22629-082	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
204	MFFZZ	MOO			30554	88-22629-086	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
205	MFFZZ	MOO			30554	88-22629-084	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
206	PAOZZ	PAOZZ			30554	88-20476	...CONTACT, ELECTRICAL UOC: 86Q, 86R	3	
207	PAOZZ	PAOZZ			30554	88-20473	...CONNECTOR, BODY UOC: 86Q, 86R	1	
208	AFFFF	AOO			30554	97-24133	...CABLE ASSY, SHIELDED UOC: 86Q, 86R	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
209	MFFZZ	MOO			30554	88-20574-2	CABLE, SHIELDED, 19.5 INCHES REQUIRED UOC: 86Q, 86R	1	
210	PAOZZ	PAOZZ			30554	88-20274-5	TERMINAL, SPADE #6, 16-14 AWG UOC: 86Q, 86R	2	
211	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 4 INCHES UOC: 86Q, 86R	1	
212	PAOZZ	PAOZZ			30554	88-20274-1	TERMINAL, SPADE #6, 22-18 AWG UOC: 86Q, 86R	1	
213	MFFZZ	MOO			30554	88-22629-087	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED UOC: 86Q, 86R	1	
214	MFFZZ	MOO			30554	88-22629-040	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED UOC: 86Q, 86R	1	
215	MFFZZ	MOO			30554	88-22629-041	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED UOC: 86Q, 86R	1	
216	PAOZZ	PAOZZ			30554	88-20274-11	TERMINAL, SPADE #8, 16-14 AWG UOC: 86Q, 86R	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

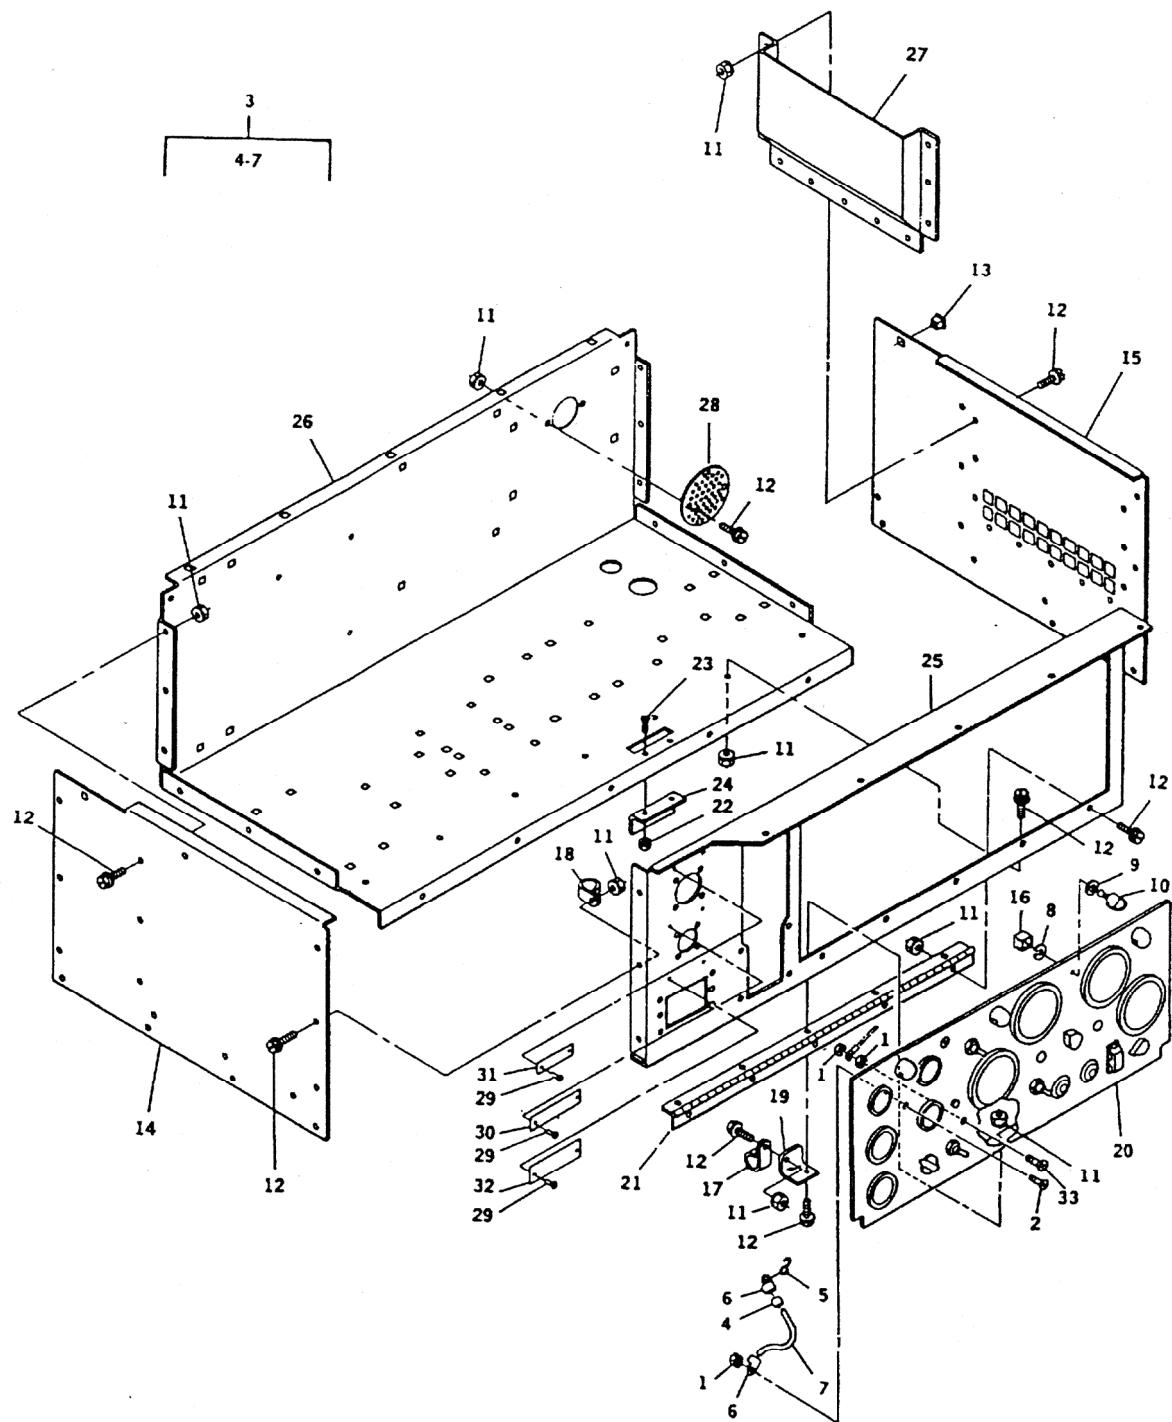


Figure 9. Control Box Panels.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	PER EQUIP
GROUP 03 - CONTROL BOX ASSEMBLY									
FIG. 9 CONTROL BOX PANELS									
1	PAOZZ	PAOZZ			30554	69-561-3	..NUT, PLAIN, ASSEMBLED	1	
2	PAOZZ	PAOZZ			80205	MS35198-42	..SCREW, MACHINE	1	
3	AOOOO	AOO			30554	88-22120	..HOLDER, CONTROL PAN	1	
4	MOOZZ	MOO			30554	88-22120-4	...INSULATION, SLEEVING MAKE FROM P/N M23053/5-104-0 (81349), 1.5 INCHES REQUIRED	1	
5	PAOZZ	PAOZZ			96906	MS87006-13	...HOOK, CHAIN, S	1	
6	PAOZZ	PAOZZ			96906	MS20659-144	...TERMINAL, LUG	2	
7	MOOZZ	MOO			30554	88-22120-2	...ROPE, FIBROUS BMV 9 7 MAKE FROM P/N 1-41NDIA (72205), 10 INCHES REQD	1	
8	PAOZZ	PAOZZ			30554	88-20052	..RETAINER	2	
9	PAOZZ	PAOZZ			30554	88-20242	..WASHER, WEAR	2	
10	PAOZZ	PAOZZ			30554	88-20051	..STUD, ¼ TURN	2	
11	PAOZZ	PAOZZ			30554	69-561-6	..NUT, PLAIN, ASSEMBLED	36	
12	PAOZZ	PAOZZ			30554	88-20260-21	..SCREW, HEX WASHERHEAD	36	
13	PAOZZ	PAOZZ			30554	88-21674-2	..NUT, CAGE	7	
14	XDOZZ	XB			30554	88-21868	..PANEL, CONTROL BOX LEFT SIDE	1	
15	XDOZZ	XB			30554	88-21869	..PANEL, CONTROL BOX RIGHT SIDE	1	
16	PAOZZ	PAOZZ			94222	85-35-309-56	..RECEPTACLE, TURNLOCK	2	
17	PAOZZ	PAOZZ			96906	MS21333-76	..CLAMP, LOOP	1	
18	PAOZZ	PAOZZ			96906	MS21333-75	..CLAMP, LOOP	1	
19	XDOZZ	XB			30554	88-21980	..BRACKET, HARNESS SU	1	
20	XDOZZ	XB			30554	88-22042	..PANEL, CONTROL	1	
21	MOOZZ	MOO			30554	88-21876	..HINGE, CONTROL PANEL MAKE FROM P/N Z60960 (03007), 21.75 INCHES REQUIRED	1	
22	PAOZZ	PAOZZ			30554	69-561-2	..NUT, PLAIN, ASSEMBLED	2	
23	PAOZZ	PAOZZ			30554	88-22791-2	..SCREW, MACHINE	2	
24	XDOZZ	XB			30554	88-21874	..ANGLE, LATCH	1	
25	XDOZZ	XB			30554	88-21873	..FRAME, CONTROL PANEL	1	
26	XDOZZ	XB			30554	88-21871	..BOTTOM, CONTROL BOX	1	
27	XDOZZ	XB			30554	88-22772	..BAFFLE, CONTROL BOX	1	
28	XDOZZ	XB			30554	88-22774	..SCREEN, VENT	1	
29	PAOZZ	PAOZZ			81349	M24243/1A402	..RIVET, BLIND	6	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
30	MDOZZ	MDO			30554	88-20074	..PLATE, IDENTIFICATION, PARALLELING RECEPTACLE	1	
31	MDOZZ	MDO			30554	88-20197	..PLATE, IDENTIFICATION, DIAGNOSTICS RECEPTACLE	1	
32	MDOZZ	MDO			30554	88-20073	..PLATE IDENTIFICATION, CONVENIENCE RECEPTACLE UOC: EMK, 86Q	1	
32	MDOZZ	MDO			30554	88-22737	..PLATE, IDENTIFICATION, CONVENIENCE RECEPTACLE UOC: YNN, 86R	1	
33	PAOZZ	PAOZZ			80205	MS35198-46	..SCREW, MACHINE	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

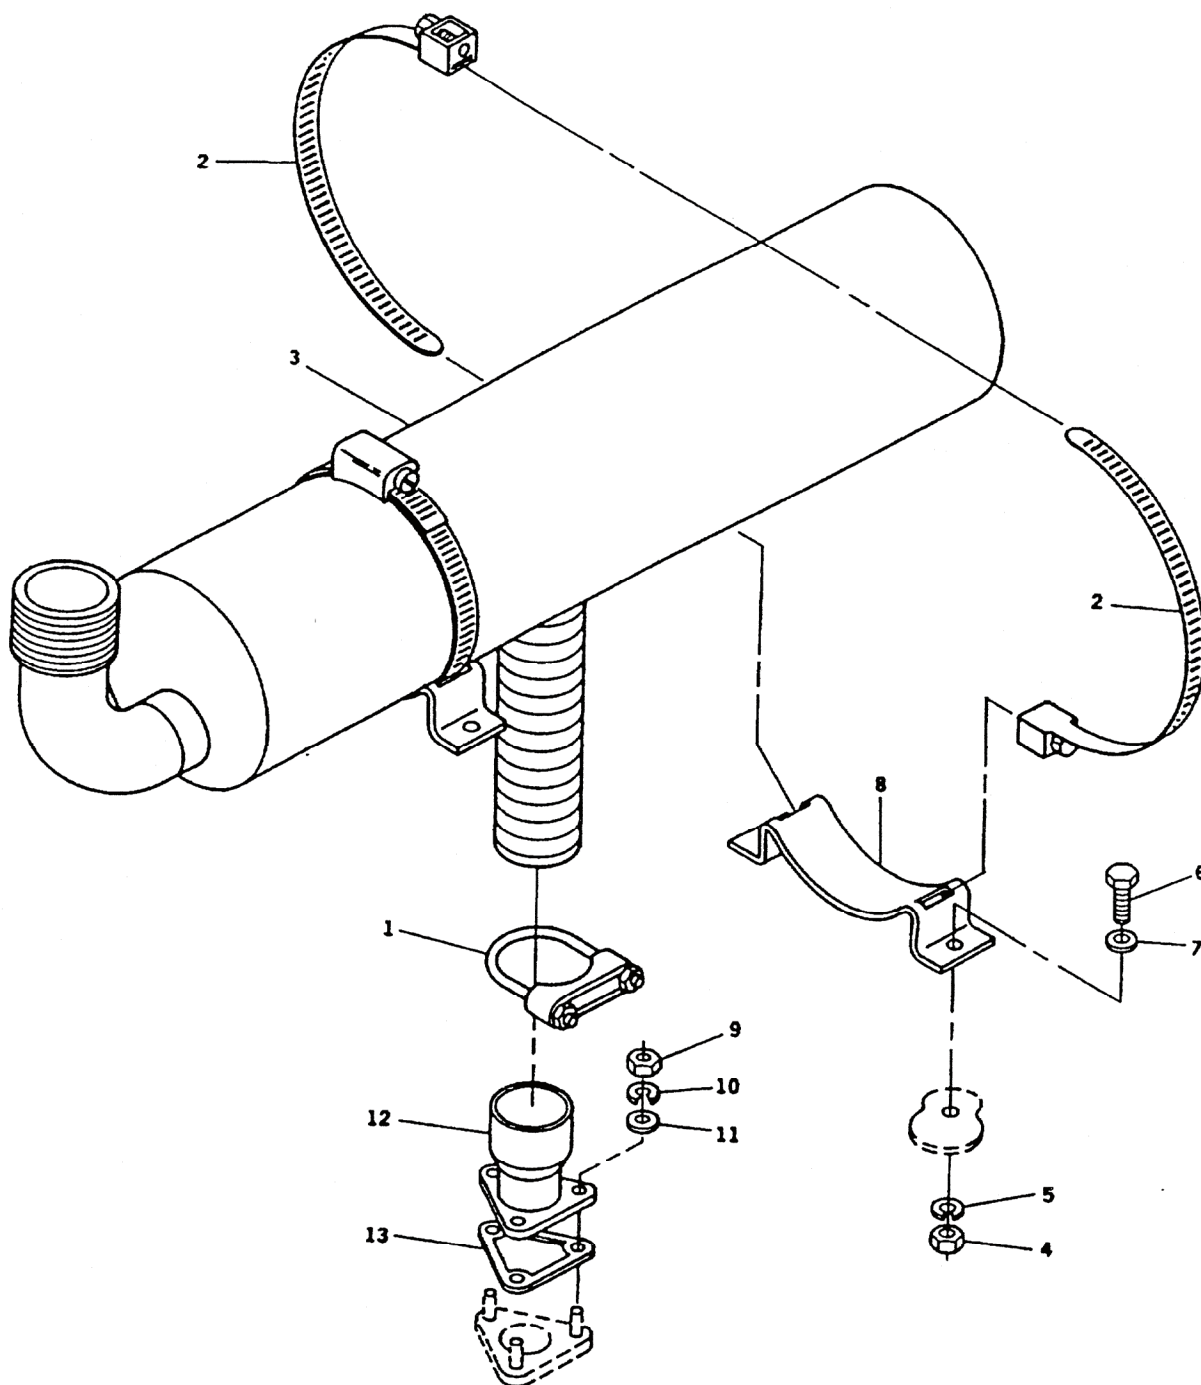


Figure 10. Muffler and Pipes.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM	SMR CODE					PART	DESCRIPTION AND		USMC
NO.	a.	b.	c.	d.	FSCM	NUMBER	USABLE ON CODE (UOC)	QTY	QTY PER EQUIP
							GROUP 04 - AIR INTAKE AND EXHAUST SYSTEM		
							FIG. 10 MUFFLER AND PIPES		
1	PAOZZ	PAOZZ			30554	88-21975	.CLAMP, LOOP	1	
2	PAOZZ	PAOZZ			30554	88-20561-6	.CLAMP, HOSE	4	
3	PAOZZ	PAOZZ			30554	88-21959	.MUFFLER ASSY, EXHAUST	1	
4	PAOZZ	PAOZZ			30554	88-22790-1	.NUT, PLAIN, HEX	4	
5	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	4	
6	PAOZZ	PAOZZ			30554	88-20260-31	.SCREW, HEX WASHERHEAD	4	
7	PAOZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT	4	
8	XDOZZ	XB			30554	88-21712	.HANGER, ENGINE EXHAUST	2	
9	PAOZZ	PAOZZ			80204	B18241B100	.NUT, PLAIN, HEX	3	
							UOC: EMK, YNN		
10	PAOZZ	PAOZZ			30554	88-22331-2	.WASHER, LOCK	3	
							UOC: EMK, YNN		
11	PAOZZ	PAOZZ			96906	MS51412-7	.WASHER, FLAT	3	
							UOC: EMK, YNN		
12	PAOZZ	PAOZZ			30554	88-22183	.CONNECTOR, EXHAUST	1	
							UOC: EMK, YNN		
13	PAOZZ	PAOZZ			30554	88-22182	.GASKET	1	
							UOC: EMK, YNN		
							END OF FIGURE		

SECTION II. REPAIR PARTS LIST (CONTINUED)

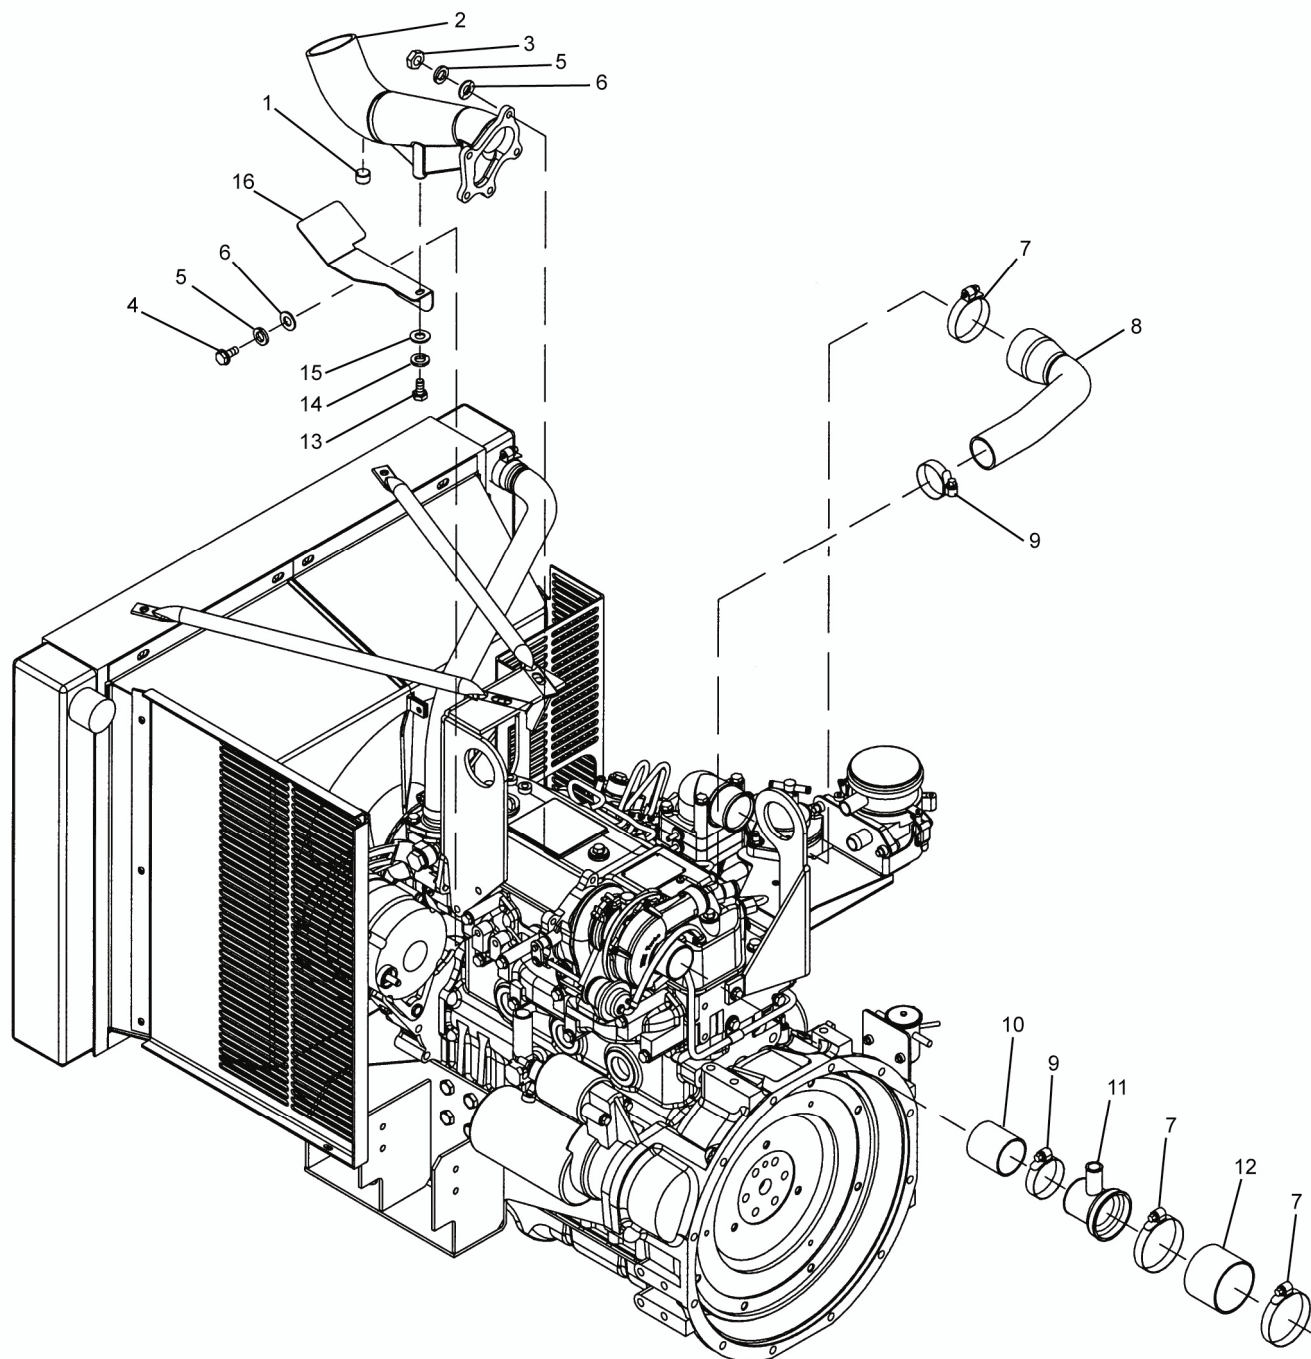


Figure 10.1. Turbocharger Installation.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	PER EQUIP
							GROUP 04 - AIR INTAKE AND EXHAUST SYSTEM		
							FIG. 10.1 TURBOCHARGER INSTALLATION		
1	PAOZZ				81343	4-130109E-C	.PLUG, PIPE, HEX UOC: 86Q, 86R	1	
2	XBFZZ				30554	97-24021	.MANIFOLD, EXHAUST UOC: 86Q, 86R	1	
3	PAOZZ				30554	97-24111-9	.NUT, HEXAGON UOC: 86Q, 86R	5	
4	PAOZZ				80204	B18231A1 0025N	.BOLT, MACHINE UOC: 86Q, 86R	2	
5	PAOZZ				30554	88-22331-1	.WASHER, LOCK UOC: 86Q, 86R	7	
6	PAOZZ				30554	88-20033-24A	.WASHER, FLAT UOC: 86Q, 86R	7	
7	PAOZZ				30554	88-20561-4	.CLAMP, HOSE UOC: 86Q, 86R	3	
8	PAFZZ				30554	97-24022	.HOSE, TURBOCHARGER UOC: 86Q, 86R	1	
9	PAOZZ				30554	88-20561-3	.CLAMP, HOSE UOC: 86Q, 86R	2	
10	PAOZZ				30554	97-24029	.HOSE, 1.75 X 2.00 UOC: 86Q, 86R	1	
11	PAOZZ				30554	97-24028	.REDUCER, AIR CLEANER UOC: 86Q, 86R	1	
12	PAOZZ				30554	97-24030	.HOSE, 2.50 X 2.00 UOC: 86Q, 86R	1	
13	PAOZZ				30554	88-20260-30	.BOLT, MACHINE UOC: 86Q, 86R	1	
14	PAOZZ				30554	88-20556-38	.WASHER, LOCK UOC: 86Q, 86R	1	
15	PAOZZ				30554	88-20033-21A	.WASHER, FLAT UOC: 86Q, 86R	1	
16	PAOZZ				30554	97-24020	.BRACKET, MANIFOLD UOC: 86Q, 86R	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

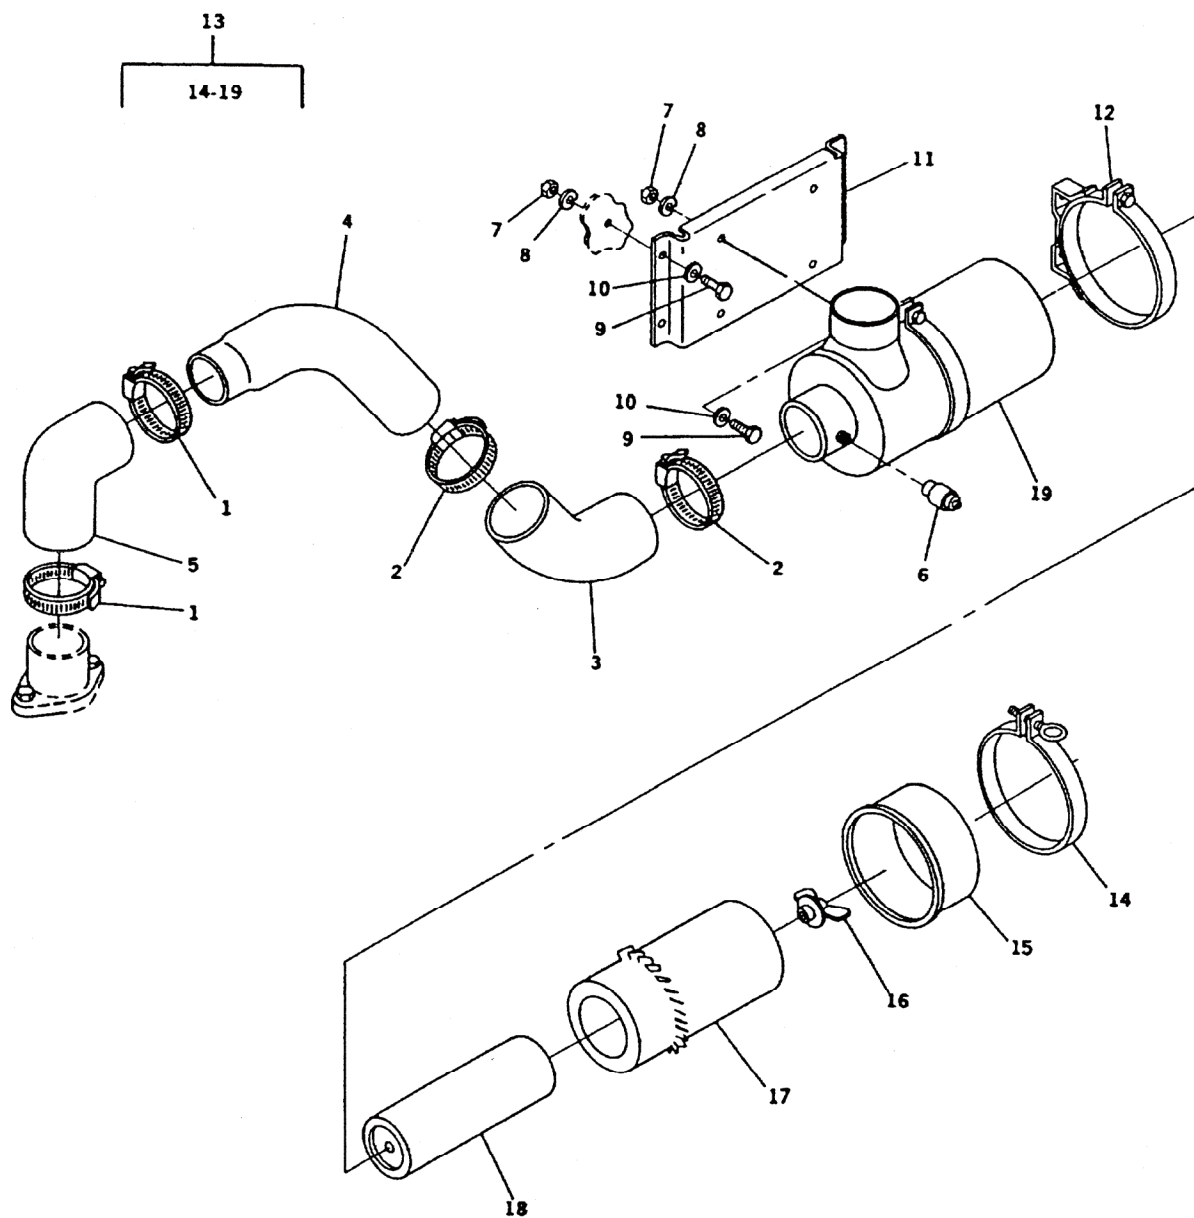


Figure 11. Air Cleaner and Piping.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM		AIR		USMC	FSCM	PART	DESCRIPTION AND		PER
NO.	ARMY	FORCE	NAVY			NUMBER	USABLE ON CODE (UOC)	QTY	EQUIP
GROUP 04 - AIR INTAKE AND EXHAUST SYSTEM									
FIG. 11 AIR CLEANER AND PIPING									
1	PAOZZ	PAOZZ			30554	88-20561-4	.CLAMP, HOSE	2	
2	PAOZZ	PAOZZ			30554	88-20561-5	.CLAMP, HOSE	2	
3	PAOZZ	PAOZZ			30554	88-21177-1	.HOSE, PREFORMED	1	
4	XDOZZ	XB			30554	88-22301	.TUBE ASSY, AIR INTAKE	1	
5	PAOZZ	PAOZZ			30554	88-22300	.HOSE, PREFORMED	1	
6	PAOZZ	PAOZZ			30554	88-21127	.INDICATOR ASSY, AIR CL	1	
7	PAOZZ	PAOZZ			30554	88-22790-1	.NUT, PLAIN, HEX	8	
8	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	8	
9	PAOZZ	PAOZZ			30554	88-20260-32	.SCREW, HEX WASHERHEAD	8	
10	PAOZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT	8	
11	XDOZZ	XB			30554	88-21743	.SUPPORT, AIR CLEANER	1	
							UOC: EMK, YNN		
11	XDOZZ	XB			30554	97-24042	.SUPPORT, AIR CLEANER	1	
							UOC: 86Q, 86R		
12	PAOZZ	PAOZZ			30554	88-21129	.BAND, AIR CLEANER MNTG.	2	
13	XDOOO	XB			30554	88-21065	.AIR CLEANER	1	
14	PAOZZ	PAOZZ			18265	P00-2904	..CLAMP ASSY	1	
15	XDOZZ	XB			18265	P12-0316	..CUP ASSY	1	
16	PAOZZ	PAOZZ			18265	P10-1870	..NUT ASSY	2	
17	PAOZZ	PAOZZ			18265	SMP18-1072	..FILTER ELEMENT, INTA	1	
18	PAOZZ	PAOZZ			18265	P12-0307	..FILTER ELEMENT, INTA	1	
19	XAOZZ	XA			18265	P12-028	..CANISTER, AIR CLEAN	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

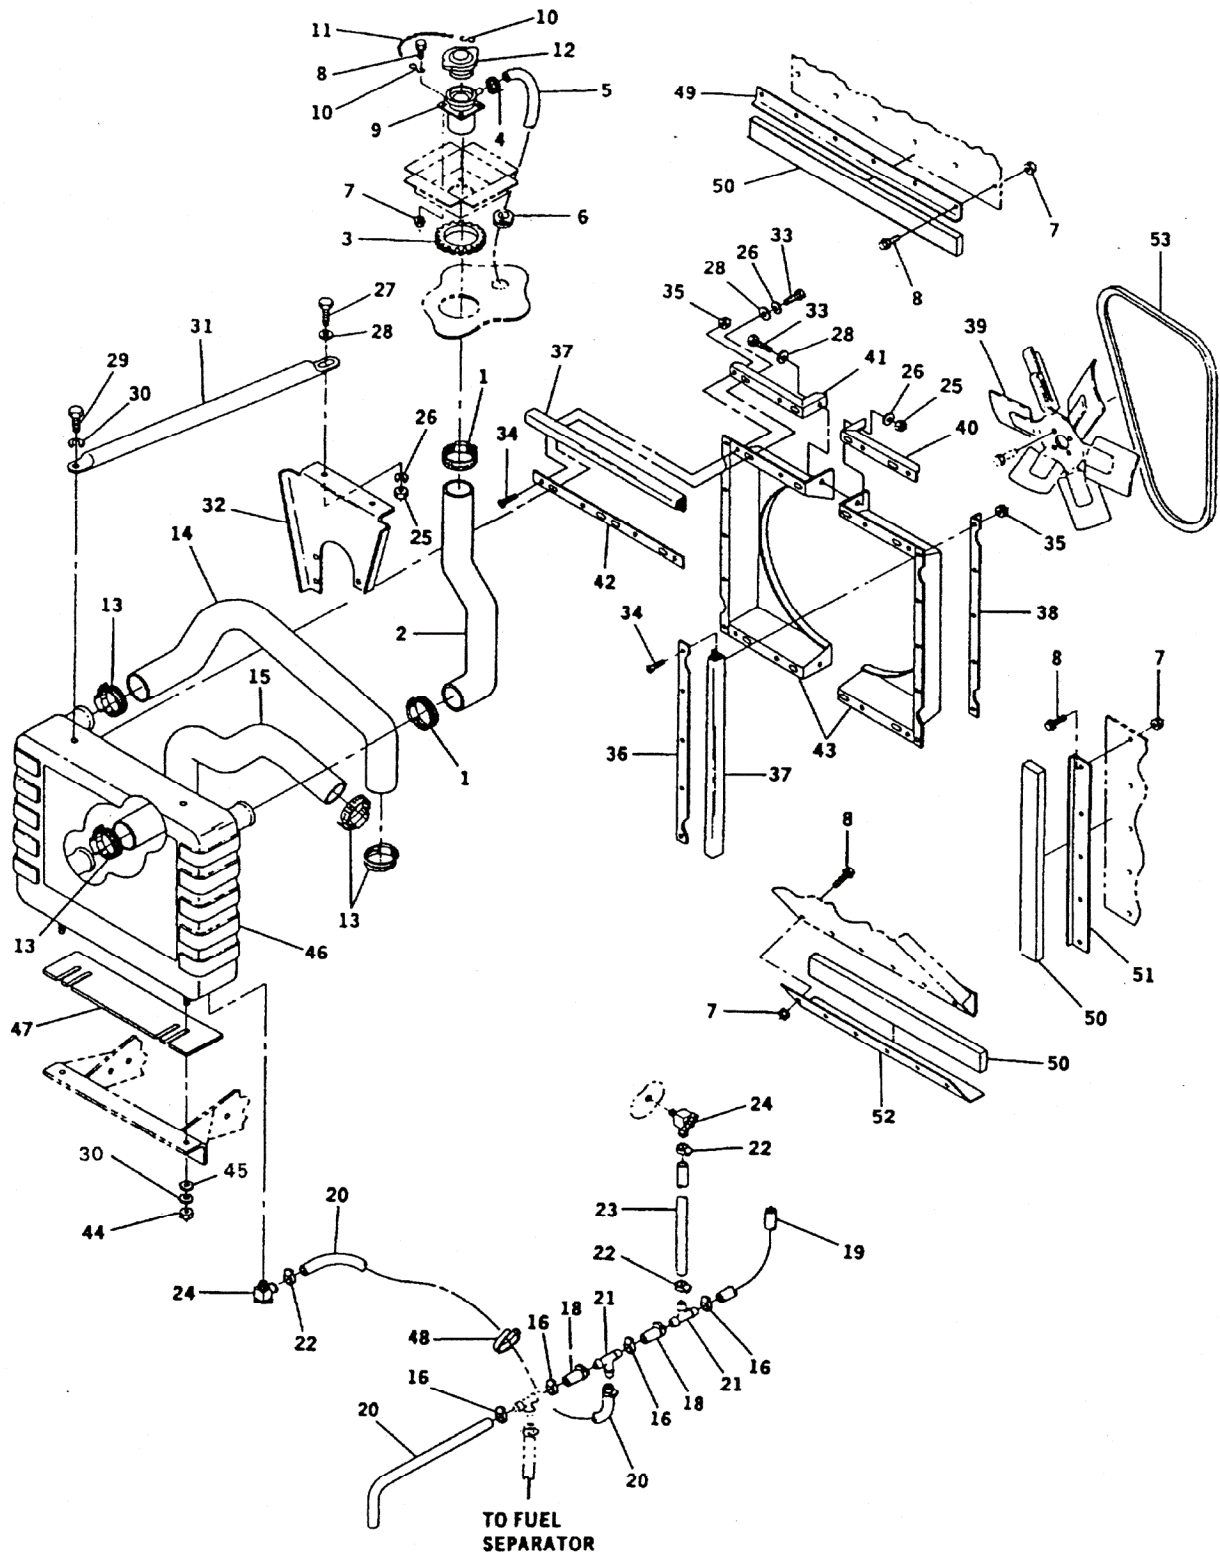


Figure 12. Coolant System (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

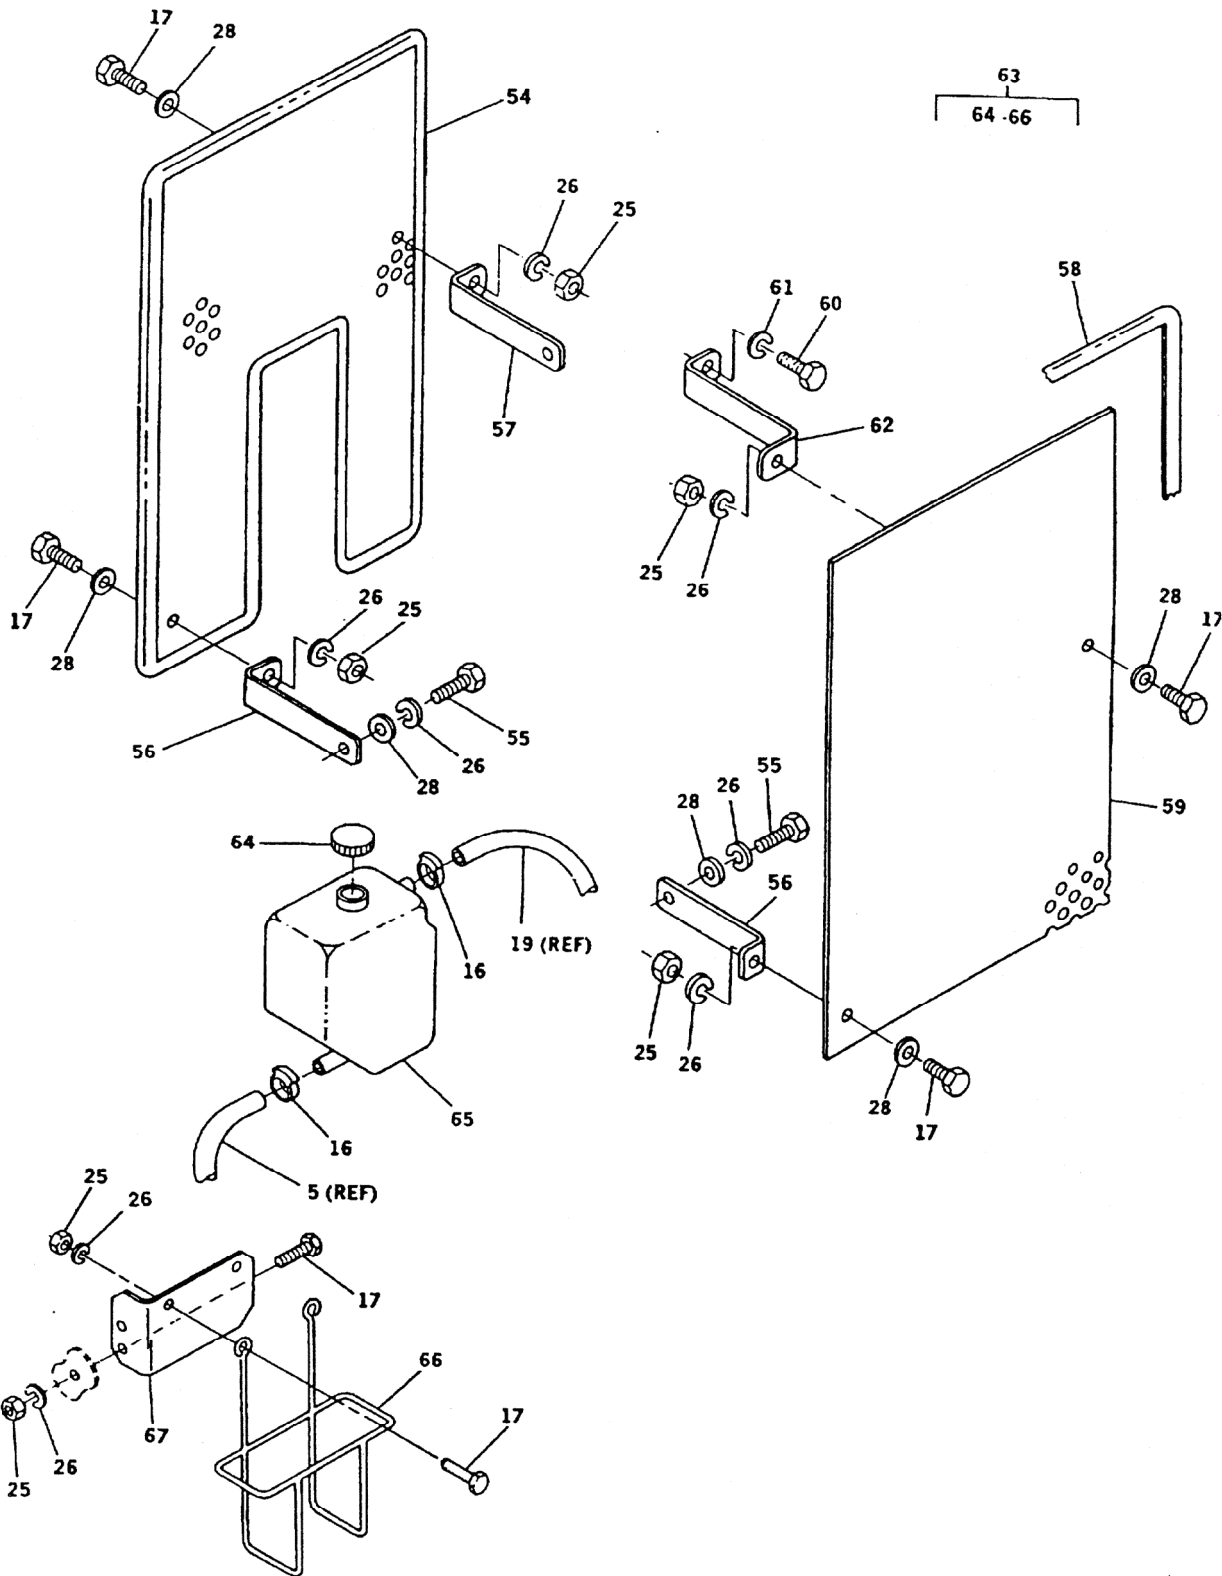


Figure 12. Coolant System (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	PER EQUIP
GROUP 05 - COOLANT SYSTEM									
FIG. 12 COOLANT SYSTEM									
1	PAOZZ	PAOZZ			30554	88-20561-4	.CLAMP, HOSE	2	
2	PAOZZ	PAOZZ			30554	88-22170	.HOSE, PREFORMED	1	
3	MOOZZ	MOO			30554	88-21604-228	.GROMMET, NONMETALLIC MAKE FROM P/N 88-20543-2 (30554), AS REQUIRED UOC: EMK	1	
3	MOOZZ	MOO			30554	97-24604-228	.GROMMET, NONMETALLIC MAKE FROM P/N 88-20543-2 (30554), AS REQUIRED UOC: 86Q	1	
3	MOOZZ	MOO			30554	88-21605-228	.GROMMET, NONMETALLIC MAKE FROM P/N 88-20543-2 (30554), AS REQUIRED UOC: YNN	1	
3	MOOZZ	MOO			30554	97-24605-228	.GROMMET, NONMETALLIC MAKE FROM P/N 88-20543-2 (30554), AS REQUIRED UOC: 86R	1	
4	PAOZZ	PAOZZ			81343	SAE J1508-06	.CLAMP, HOSE	1	
5	MOOZZ	MOO			30554	88-22302-12	.HOSE, NONMETALLIC MAKE FROM P/N MS521302A101360 (96906), 53 INCHES REQUIRED. RADIATOR OVERFLOW	1	
6	PAOZZ	PAOZZ			96906	MS35489-20	.GROMMET, NONMETALLIC	1	
7	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	4	
8	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	4	
9	XDOZZ	XB			30554	88-21849	.NECK, FILL RADIATOR	1	
10	PAOZZ	PAOZZ			96906	MS87006-11	.HOOK, CHAIN, S	2	
11	MOOZZ	MOO			30554	88-21604-272	.CHAIN, CAP MAKE FROM P/N RRC271TY2CL7-16 (81348), 6.5 INCHES REQD UOC: EMK	1	
11	MOOZZ	MOO			30554	97-24604-272	.CHAIN, CAP MAKE FROM P/N RRC271TY2CL7-16 (81348), 6.5 INCHES REQD UOC: 86Q	1	
11	MOOZZ	MOO			30554	88-21605-272	.CHAIN, CAP MAKE FROM P/N RRC271TY2CL7-16 (81348), 6.5 INCHES REQD UOC: YNN	1	
11	MOOZZ	MOO			30554	97-24605-272	.CHAIN, CAP MAKE FROM P/N RRC271TY2CL7-16 (81348), 6.5 INCHES REQD UOC: 86R	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
12	XCOZZ	XCOZZ			30554	88-22533	.CAP, FILLER OPENING ORDER NSN 5340-01-340-8706, P/N AX-2950 (78225), AND SOLDER LUG P/N 5413-28 (86928), TM 9-6115-643-24	1	
13	PAOZZ	PAOZZ			30554	88-20561-3	.CLAMP, HOSE UOC: EMK, YNN	4	
14	PAOZZ	PAOZZ			30554	88-22171	.HOSE, PREFORMED RADIATOR UPPER UOC: EMK, YNN	1	
15	PAOZZ	PAOZZ			30554	88-22172	.HOSE, PREFORMED RADIATOR LOWER	1	
16	PAOZZ	PAOZZ			30554	88-22554-2	.CLAMP, HOSE UOC: EMK, YNN	8	
17	PAOZZ	PAOZZ			80204	B1821BH0 25C075N	.SCREW, CAP, HEX HEAD	10	
18	MOOZZ	MOO			30554	88-22302-4	.HOSE, NONMETALLIC MAKE FROM P/N MS521302A101360 (96906), 31 INCHES REQUIRED	2	
19	MOOZZ	MOO			30554	88-22302-6	.HOSE, NONMETALLIC MAKE FROM P/N MS521302A101360 (96906), 20 INCHES REQUIRED	2	
20	MOOZZ	MOO			30554	88-22752-3	.HOSE, NONMETALLIC MAKE FROM P/N 483666 (49185), 12 INCHES REQUIRED	1	
21	PAOZZ	PAOZZ			30554	88-22323	.TEE, HOSE	2	
22	PAOZZ	PAOZZ			30554	88-22554-3	.CLAMP, HOSE	4	
23	MOOZZ	MOO			30554	88-22752-2	.HOSE, COOLANT DRAIN MAKE FROM P/N 483666 (49185), 20 INCHES REQUIRED	1	
24	PAOZZ	PAOZZ			30554	88-22751	.COCK, DRAIN UOC: EMK, YNN	2	
25	PAOZZ	PAOZZ			30554	88-22790-1	.NUT, PLAIN, HEX	18	
26	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	24	
27	PAOZZ	PAOZZ			30554	88-20260-32	.SCREW, HEX WASHERHEAD	2	
28	PAOZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT	26	
29	PAOZZ	PAOZZ			80204	B1821BH038 C062N	.SCREW, CAP, HEX HEAD	2	
30	PAOZZ	PAOZZ			80205	MS35338-65	.WASHER, LOCK	4	
31	XDOZZ	XB			30554	88-21700	.TIE ROD, RADIATOR U	2	
32	XDOZZ	XB			30554	88-22424	.SUPPORT, RADIATOR UOC: EMK, YNN	1	
33	PAOZZ	PAOZZ			80204	B1821BH025 C125N	.SCREW, CAP, HEX HEAD UOC: EMK, YNN	6	
34	PAOZZ	PAOZZ			96906	MS51481-06	.SCREW, MACHINE	18	
35	PAOZZ	PAOZZ			80205	MS21044N08	.NUT, SELF LOCKING	18	
36	XDOZZ	XB			30554	88-22727	.SUPPORT, SIDE RADIATOR UOC: EMK, YNN	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
37	MOOZZ	MOO			30554	88-21604-364	.SEAL, RADIATOR MAKE FROM P/N 88-22712 (30554), AS REQUIRED UOC: EMK	1	
37	MOOZZ	MOO			30554	88-21605-364	.SEAL, RADIATOR MAKE FROM P/N 88-22712 (30554), AS REQUIRED UOC: YNN	1	
38	XDOZZ	XB			30554	88-22729	.STIFFENER, SIDE RADIATOR UOC: EMK, YNN	2	
39	XDOZZ	XB			30554	88-22668	.FAN, ENGINE COOLING	1	
40	XDOZZ	XB			30554	88-22725	.STIFFENER, RADIATOR LEFT SIDE UOC: EMK, YNN	2	
41	XDOZZ	XB			30554	88-22726	.STIFFENER, RADIATOR RIGHT SIDE UOC: EMK, YNN	2	
42	XDOZZ	XB			30554	88-22728	.SUPPORT, RADIATOR SE UOC: EMK, YNN	2	
43	XDOZZ	XB			30554	88-21695	.SHROUD, FAN UOC: EMK, YNN	2	
44	PAOZZ	PAOZZ			30554	88-22790-3	.NUT, PLAIN, HEX UOC: EMK, YNN	2	
45	PAOZZ	PAOZZ			96906	MS51412-7	.WASHER, FLAT	2	
46	PAOFF	PAOOO			30554	88-22167	.RADIATOR, ENGINE	1	
47	XDOZZ	XB			30554	88-22703	.SPACER, SPECIAL UOC: EMK, YNN	1	
48	PAOZZ	PAOZZ			96906	MS3367-1-9	.STRAP, TIEDOWN, ELECT UOC: EMK, YNN	1	
49	XDOZZ	XB			30554	88-22723	.SUPPORT, UPPER FRONT UOC: EMK, YNN	1	
50	MOOZZ	MOO			30554	88-21604-317	.SEAL, DOOR MAKE FROM P/N 6130TZS-S1SXPSA1S .75X1.00 (99739), AS REQUIRED UOC: EMK	1	
50	MOOZZ	MOO			30554	88-21605-317	.SEAL, DOOR MAKE FROM P/N 6130TZS-S1SXPSA1S .75X1.00 (99739), AS REQUIRED UOC: YNN	1	
51	XDOZZ	XB			30554	88-22724	.SUPPORT, SIDE FRONT UOC: EMK, YNN	2	
52	XDOZZ	XB			30554	88-22722	.SUPPORT, LOWER RADIA UOC: EMK, YNN	1	
53	PAOZZ	PAOZZ			30554	88-22740	.BELT, V UOC: EMK, YNN	1	
54	XDOZZ	XB			30554	88-22490	.FAN, GUARD RIGHT SIDE UOC: EMK, YNN	1	
55	PAOZZ	PAOZZ			80204	B1821BH025 C100N	.SCREW, CAP, HEX HEAD	4	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
56	XDOZZ	XB			30554	88-22492	.FAN, GUARD SUPPORT UOC: EMK, YNN	4	
57	XDOZZ	XB			30554	88-22491	.BRACKET	1	
58	MOOZZ	MOO			30554	88-20187	.PROTECTOR, EDGE BMV12 58 MAKE FROM P/N 62-B7-1/16 (57137), AS REQUIRED UOC: EMK, YNN	1	
59	XDOZZ	XB			30554	88-22489	.FAN GUARD LS LEFT SIDE UOC: EMK, YNN	1	
60	PAOZZ	PAOZZ			80204	B18231B10 025N	.SCREW, CAP, HEX HEAD	1	
61	PAOZZ	PAOZZ			30554	88-22331-1	.WASHER, LOCK	1	
62	XDOZZ	XB			30554	88-22493	.FAN GUARD SUPPORT B LEFT SIDE UOC: EMK, YNN	1	
63	PAOZZ	PAOZZ			30554	88-20468	.TANK, RADIATOR, OVERFL	1	
64	XAOZZ	XA			30554	88-20468-1	..CAP	1	
65	XAOZZ	XA			30554	88-20468-2	..BOTTLE	1	
66	XAOZZ	XA			30554	88-20468-3	..CAGE, BOTTLE	1	
67	XDOZZ	XB			30554	88-22543	.BRACKET, OVERFLOW	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

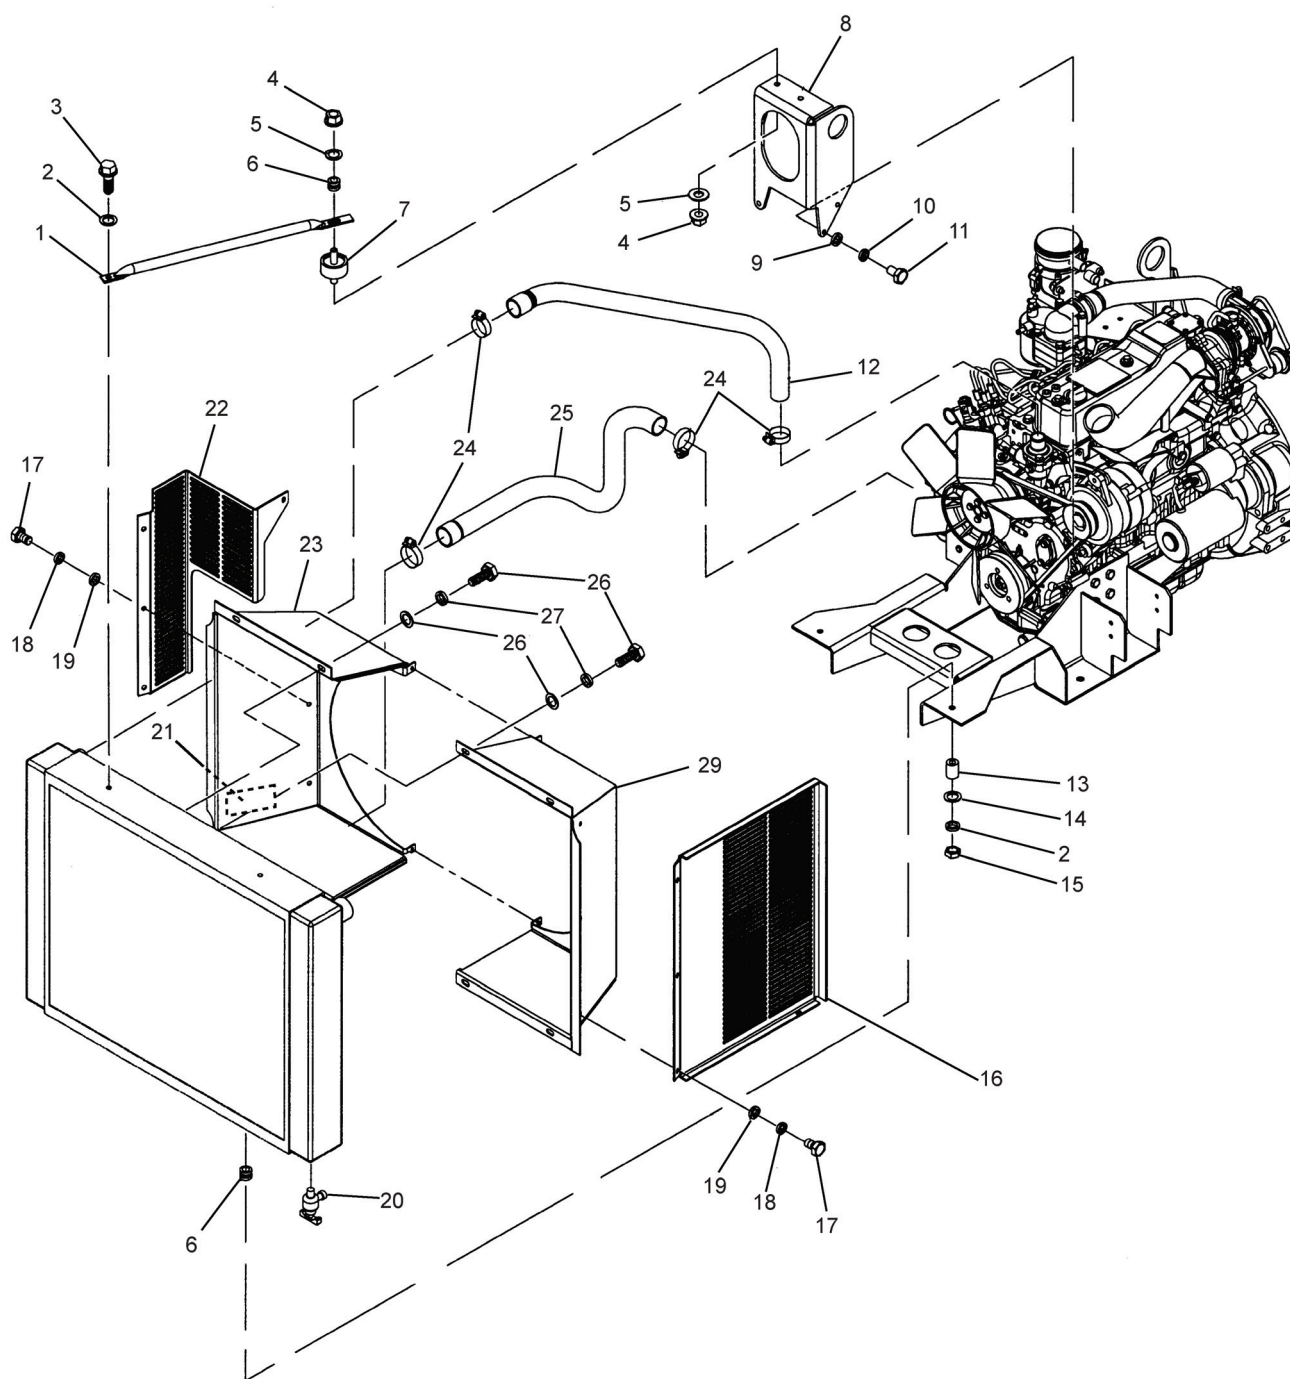


Figure 12.1. Coolant System

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
GROUP 05 - COOLANT SYSTEM									
FIG. 12.1 COOLANT SYSTEM									
1	XBOZZ				30554	97-24034	.TIE-ROD, RADIATOR, UP UOC: 86Q, 86R	2	
2	PAOZZ				30554	88-20556-7	.WASHER, LOCK UOC: 86Q, 86R	4	
3	PAOZZ				30554	88-20260-51	.SCREW UOC: 86Q, 86R	2	
4	PAOZZ				30554	69-561-5	.NUT, PLAIN, ASSEMBLED UOC: 86Q, 86R	4	
5	PAOZZ				30554	88-20564-2	.WASHER, FLAT UOC: 86Q, 86R	2	
6	PAOZZ				30554	00-24003-1	.GROMMET, RADIATOR UOC: 86Q, 86R	2	
7	XBOZZ				30554	00-24004	.MOUNT, RADIATOR UOC: 86Q, 86R	2	
8	XBOZZ				30554	97-24019	.SUPPORT, RADIATOR, UPPER UOC: 86Q, 86R	1	
9	PAOZZ				30554	88-20033-24A	.WASHER, FLAT UOC: 86Q, 86R	3	
10	PAOZZ				30554	88-22331-1	.WASHER, LOCK UOC: 86Q, 86R	3	
11	PAOZZ				80204	B18231A100 25N	.BOLT, MACHINE UOC: 86Q, 86R	3	
12	PAOZZ				30554	97-24036	.HOSE, UPPER, RADIATOR UOC: 86Q, 86R	1	
13	PAOZZ				30554	00-24003-2	.GROMMET, RADIATOR UOC: 86Q, 86R	2	
14	PAOZZ				30554	88-20033-31A	.WASHER, FLAT UOC: 86Q, 86R	2	
15	PAOZZ				30554	88-22790-3	.NUT, HEX UOC: 86Q, 86R	2	
16	XBOZZ				30554	97-24040	.GUARD, FAN, LEFT UOC: 86Q, 86R	1	
17	PAOZZ				30554	88-20260-30	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	6	
18	PAOZZ				30554	88-20556-38	.WASHER, LOCK UOC: 86Q, 86R	6	
19	PAOZZ				30554	88-20033-22A	.WASHER, FLAT UOC: 86Q, 86R	6	
20	PAOZZ				30554	88-22751	.COCK, DRAIN UOC: 86Q, 86R	1	
21	PAOZZ				30554	97-24146	.NAMEPLATE, OIL, CHECK UOC: 86Q, 86R	1	
22	XBOZZ				30554	97-24041	.GUARD, FAN, RIGHT UOC: 86Q, 86R	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
23	XBOZZ				30554	97-24032	.SHROUD, RADIATOR RH UOC: 86Q, 86R	1	
24	PAOZZ				30554	88-20561-3	.CLAMP, HOSE UOC: 86Q, 86R	4	
25	PAOZZ				30554	97-24035	.HOSE, LOWER, RADIATOR UOC: 86Q, 86R	1	
26	PAOZZ				30554	88-20260-30	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	8	
27	PAOZZ				30554	88-20033-22A	.WASHER, FLAT UOC: 86Q, 86R	2	
28	PAOZZ				30554	88-20556-38	.WASHER, LOCK UOC: 86Q, 86R	2	
29	XBOZZ				30554	97-24033	.SHROUD, RADIATOR LH UOC: 86Q, 86R	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

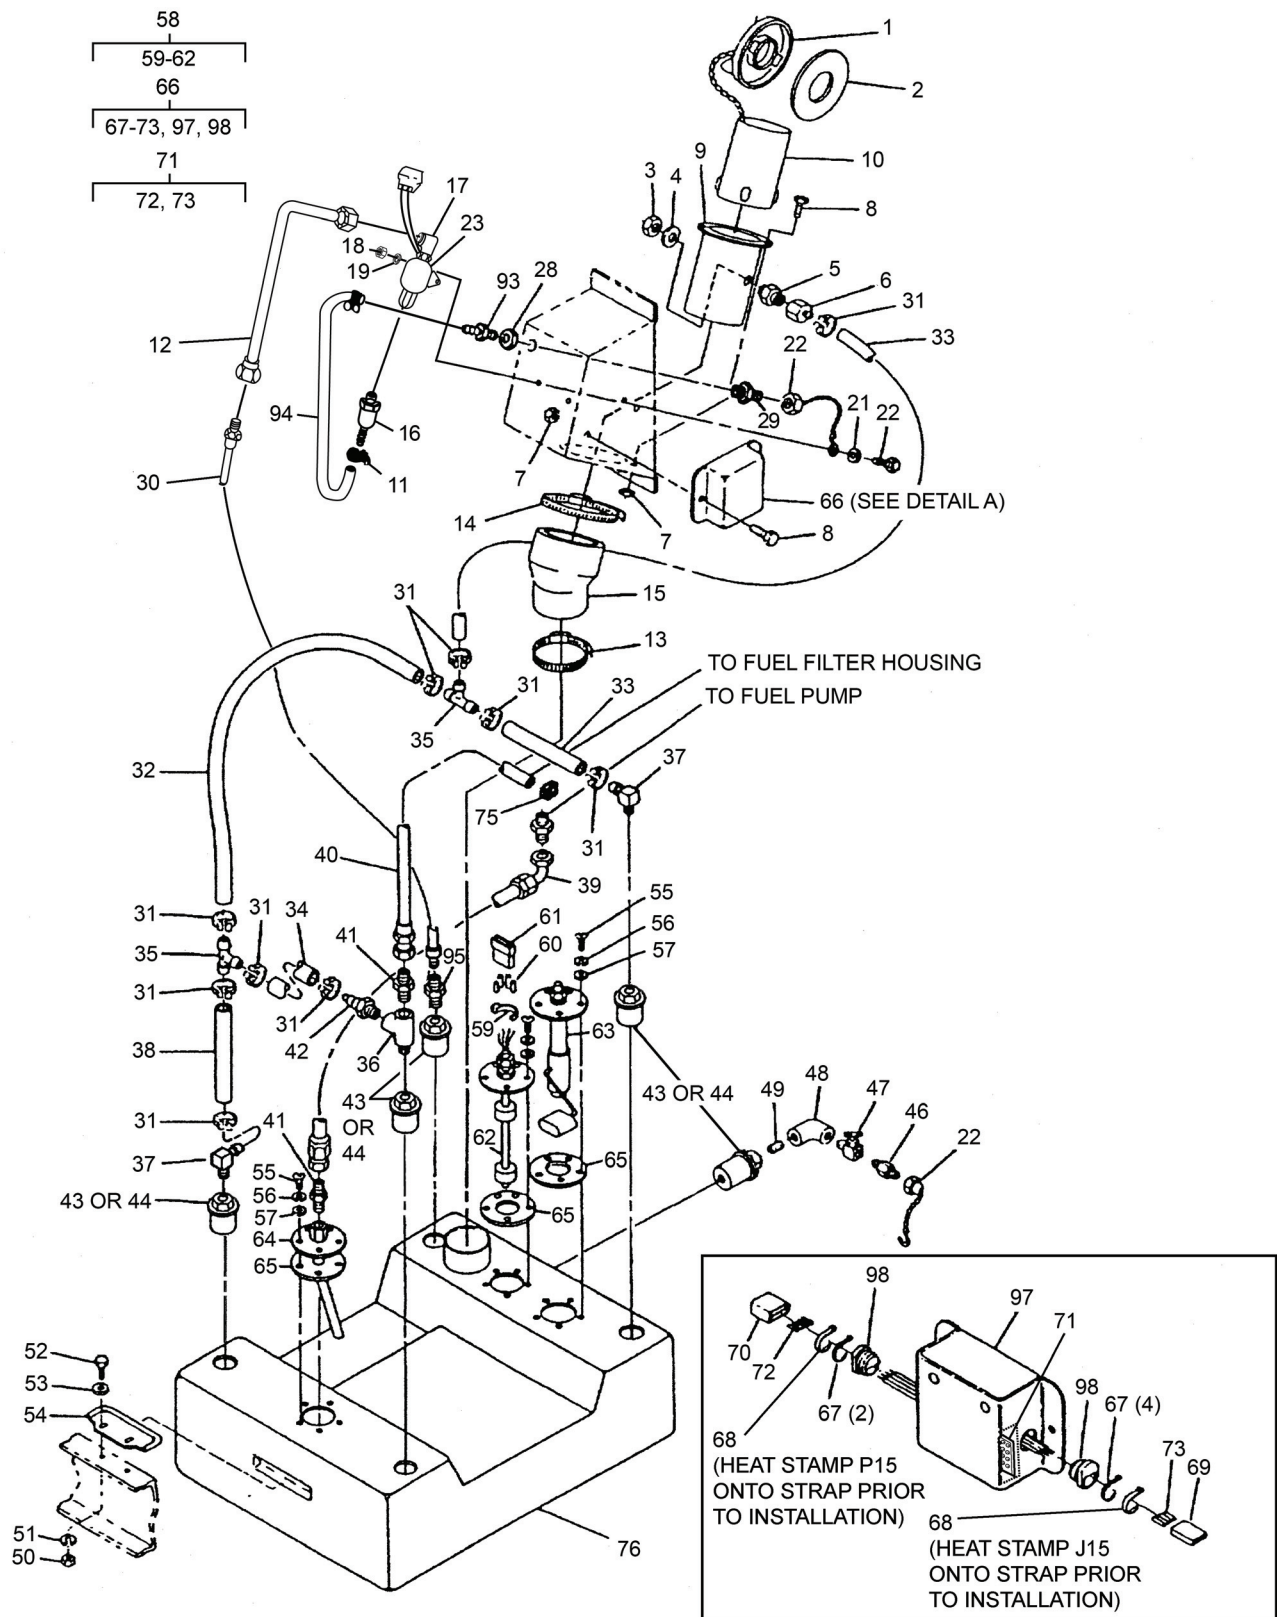


Figure 13. Fuel Tank, Lines and Fittings (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

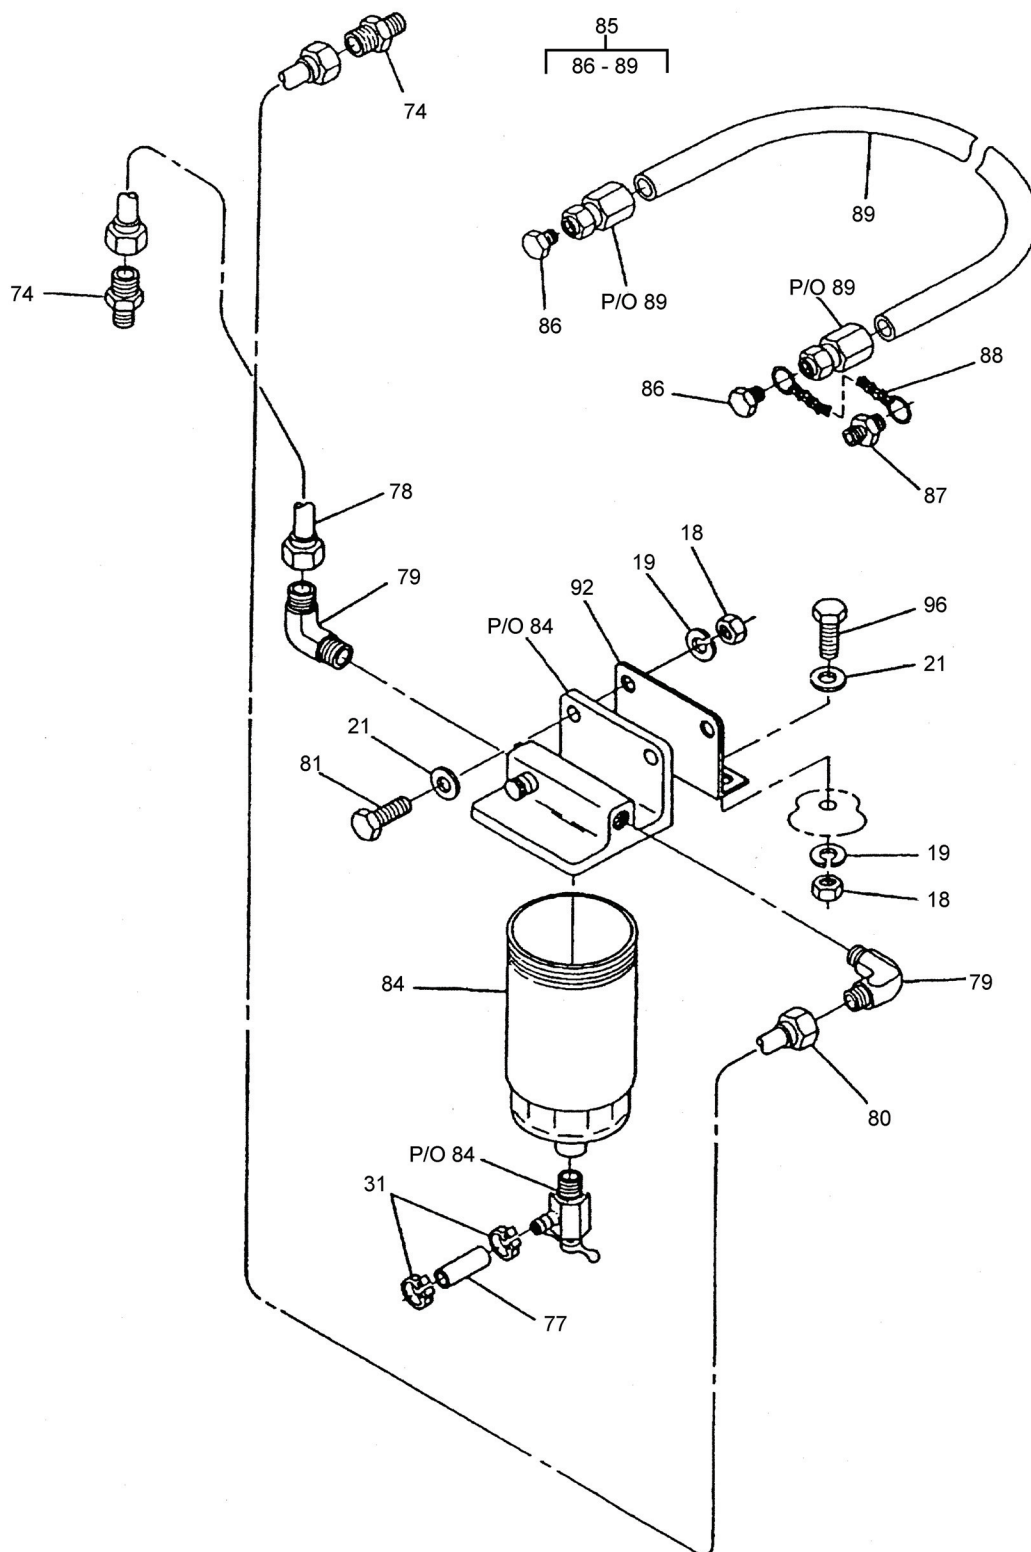


Figure 13. Fuel Tank, Lines and Fittings (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	PER EQUIP
GROUP 06 - FUEL SYSTEM									
FIG. 13 FUEL TANK, LINES, AND FITTINGS									
1	PAOZZ	PAOZZ			96906	MS35645-1	.CAP, FILLER OPENING	1	
2	PAOZZ	PAOZZ			96906	MS35643-1	.GASKET	1	
3	PAOZZ	PAOZZ			30554	88-22795	.NUT, SEAL	1	
4	PAOZZ	PAOZZ			96906	MS51412-8	.WASHER, FLAT	1	
5	PAOZZ	PAOZZ			81343	4-2 140137	.NIPPLE, HEX	1	
6	PAOZZ	PAOZZ			30554	88-21884	.CONNECTOR, FEMALE	1	
7	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	8	
8	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	8	
9	XDOZZ	XB			30554	88-21892	.FILLER NECK, FUEL T	1	
10	XDOZZ	XB			30554	88-21893	.TUBE, FILLER NECK	1	
11	PAOZZ	PAOZZ			81343	SAE J1508-06	.CLAMP, HOSE	2	
UOC: EMK, YNN									
12	XDOZZ	XB			30554	88-22111	.TUBE ASSY, OUTLET	1	
13	PAOZZ	PAOZZ			30554	88-20561-6	.CLAMP, HOSE	1	
14	PAOZZ	PAOZZ			30554	88-20561-7	.CLAMP, HOSE	1	
15	PBOZZ	PBOZZ			30554	88-22068	.HOSE, PREFORMED	1	
16	PAOZZ	PAOZZ			72850	00-24000	.FILTER, FUEL	1	
UOC: EMK, YNN									
17	PAOZZ	PAOZZ			81343	4-2 070102C	.ADAPTER, PIPE TO TUBE	1	
18	PAOZZ	PAOZZ			30554	88-22790-1	.NUT, PLAIN, HEX	6	
19	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	6	
20	PAOZZ	PAOZZ			30554	88-20260-31	.BOLT, MACHINE	2	
21	PAOZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT	6	
22	PAOZZ	PAOZZ			93742	69-539-2	.CAP, TUBE	2	
23	AOOOO	AOO			30554	00-24002-1	.PUMP, FUEL	1	
UOC: EMK, YNN									
24	PAOZZ	PAOZZ			96906	MS3367-1-9	.STRAP, TIEDOWN, ELECT	1	
UOC: EMK, YNN									
25	NOT USED								
26	NOT USED								
27	NOT USED								
28	PAOZZ	PAOZZ			96906	MS51860-54Z	.LOCKNUT, TUBE FITTING	1	
UOC: EMK, YNN									
29	PAOZZ	PAOZZ			96906	MS51520A5	.ADAPTER, STRAIGHT, TU	1	
UOC: EMK, YNN									
30	PAOZZ	PAOZZ			30554	88-22338-1	.HOSE ASSEMBLY, NONMET	1	
31	PAOZZ	PAOZZ			30554	88-20029-4	.CLAMP, HOSE	12	
32	MOOZZ	MOO			30554	88-21604-146	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 33 INCHES REQUIRED	1	
UOC: EMK									

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
32	MOOZZ	MOO			30554	97-24604-146	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 33 INCHES REQUIRED UOC: 86Q	1	
32	MOOZZ	MOO			30554	88-21605-146	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 33 INCHES REQUIRED UOC: YNN	1	
32	MOOZZ	MOO			30554	97-24605-146	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 33 INCHES REQUIRED UOC: 86R	1	
33	MOOZZ	MOO			30554	88-21604-104	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 12 INCHES REQUIRED UOC: EMK	2	
33	MOOZZ	MOO			30554	97-24604-104	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 12 INCHES REQUIRED UOC: 86Q	2	
33	MOOZZ	MOO			30554	88-21605-104	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 12 INCHES REQUIRED UOC: YNN	2	
33	MOOZZ	MOO			30554	97-24605-104	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 12 INCHES REQUIRED UOC: 86R	2	
34	MOOZZ	MOO			30554	88-21604-151	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 20 INCHES REQUIRED UOC: EMK	1	
34	MOOZZ	MOO			30554	97-24604-151	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 20 INCHES REQUIRED UOC: 86Q	1	
34	MOOZZ	MOO			30554	88-21605-151	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 20 INCHES REQUIRED UOC: YNN	1	
34	MOOZZ	MOO			30554	97-24605-151	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 20 INCHES REQUIRED UOC: 86R	1	
35	XDOZZ	XB			30554	88-21883	.TEE, HOSE	2	
36	PAOZZ	PAOZZ			81343	4-4-4 140424C	.TEE, PIPE	1	
37	PAOZZ	PAOZZ			30554	88-21114-2	.ELBOW, PIPE TO HOSE	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
38	MOOZZ	MOO			30554	88-21604-343	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 9 INCHES REQUIRED UOC: EMK	1	
38	MOOZZ	MOO			30554	97-24604-343	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 9 INCHES REQUIRED UOC: 86Q	1	
38	MOOZZ	MOO			30554	88-21605-343	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 9 INCHES REQUIRED UOC: YNN	1	
38	MOOZZ	MOO			30554	97-24605-343	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 9 INCHES REQUIRED UOC: 86R	1	
39	PAOZZ	PAOZZ			30554	88-22326-1	.HOSE ASSEMBLY, NONME	1	
40	PAOZZ	PAOZZ			30554	88-22325	.HOSE ASSEMBLY, NONME	1	
41	PAOZZ	PAOZZ			96906	MS51500A6	.ADAPTER, STRAIGHT, PI	2	
42	PAOZZ	PAOZZ			30554	88-21173	.ADAPTER, STRAIGHT, PI	2	
43	PAOZZ	PAOZZ			30554	88-20043	.ADAPTER, DRAIN	5	
44	PAOZZ	PAOZZ			30554	88-20049	.FITTING ASSY	5	
45	NOT USED								
46	PAOZZ	PAOZZ			96906	MS51500A5-4	.ADAPTER, STRAIGHT, PI	1	
47	PAOZZ	PAOZZ			30554	88-22096-2	.COCK, SHUTOFF, SCREW	1	
48	PAOZZ	PAOZZ			81343	4-4-130238	.ELBOW, PIPE 90 DEGREE	1	
49	PAOZZ	PAOZZ			30554	72-2173-1	.NIPPLE, PIPE	1	
50	PAOZZ	PAOZZ			30554	88-22790-2	.NUT, PLAIN, HEX	4	
51	PAOZZ	PAOZZ			96906	MS35338-64	.WASHER, LOCK	4	
52	PAOZZ	PAOZZ			80204	B1821BH03C 100N	.BOLT, MACHINE	4	
53	PAOZZ	PAOZZ			96906	MS51412-25	.WASHER, FLAT	4	
54	XDOZZ	XB			30554	88-21854	.HOLDDOWN, FUEL TANK	2	
55	PAOZZ	PAOZZ			96906	MS51492-14	.SCREW, MACHINE	15	
56	PAOZZ	PAOZZ			80205	MS35338-62	.WASHER, LOCK	15	
57	PAOZZ	PAOZZ			96906	MS51412-2	.WASHER, FLAT	15	
58	AOOOO	AOO			30554	88-22547	.SWITCH ASSY, FUEL SENDER	1	
59	PAOZZ	PAOZZ			96906	MS3367-1-9	..STRAP, TIEDOWN, ELECT	1	
60	PAOZZ	PAOZZ			30554	88-20476	..CONTACT, ELECTRICAL	4	
61	PAOZZ	PAOZZ			30554	88-20475	..CONNECTOR BODY, RECE	1	
62	PAOZZ	PAOZZ			30554	88-21121-1	..SWITCH, FUEL LEVEL	1	
63	PAOZZ	PAOZZ			30554	88-21162-3	..SWITCH, FUEL LEVEL	1	
64	XDOZZ	XB			30554	88-21850	.PICK-UP TUBE ASSY	1	
65	PAOZZ	PAOZZ			30554	88-20286	.GASKET	3	
66	PAOZZ	PAOZZ			30554	88-20492	.FLOAT SWITCH, MODULE	1	
67	PAOZZ	PAOZZ			96906	MS3367-4-9	..STRAP, TIEDOWN, ELECT	6	
68	PAOZZ	PAOZZ			96906	MS3367-1-9	..STRAP, TIEDOWN, ELECT	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
69	PAOZZ	PAOZZ			30554	88-20474	..CONNECTOR BODY, RECE	1	
70	PAOZZ	PAOZZ			30554	88-20475	..CONNECTOR BODY, RECE	1	
71	XAOOO	XAOOO			30554	88-20493	..PC BOARD ASSY, FLO	1	
72	PAOZZ	PAOZZ			30554	88-20476	...CONTACT, ELECTRICAL	4	
73	PAOZZ	PAOZZ			30554	88-20477	...CONTACT, ELECTRICAL	4	
74	PAOZZ	PAOZZ			30554	88-22324	.ADAPTER, STRAIGHT, TUBE UOC: EMK, YNN	3	
75	PAOZZ	PAOZZ			81343	SAE J1508	.CLAMP, HOSE	1	
76	PBOZZ	PBOZZ			30554	88-21043	.TANK, FUEL, ENGINE	1	
77	MOOZZ	MOO			30554	88-21604-339	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 32 INCHES REQUIRED UOC: EMK	1	
77	MOOZZ	MOO			30554	97-24604-339	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 32 INCHES REQUIRED UOC: 86Q	1	
77	MOOZZ	MOO			30554	88-21605-339	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 32 INCHES REQUIRED UOC: YNN	1	
77	MOOZZ	MOO			30554	97-24605-339	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-3 (30554), 32 INCHES REQUIRED UOC: 86R	1	
78	XDOZZ	XB			30554	88-22486	.TUBE, FUEL FILTER UOC: EMK, YNN	1	
79	PAOZZ	PAOZZ			96906	MS51504A6	.ELBOW, PIPE TO TUBE UOC: EMK, YNN	2	
80	XDOZZ	XB			30554	88-22485	.TUBE, FILTER INLET UOC: EMK, YNN	1	
81	PAOZZ	PAOZZ			80204	B1821BH025 C100N	.SCREW, CAP, HEX HEAD	4	
82	NOT USED								
83	NOT USED								
84	PBOOO	PBOOO			30554	88-21101	.FILTER, FUEL UOC: EMK, YNN	1	
85	PAOZZ	PAOZZ			30554	69-668	.LINE, FUEL, AUXILIARY	1	
86	PAOZZ	PAOZZ			30554	88-20024-5	..PLUG, TUBING	2	
87	PAOZZ	PAOZZ			30554	75-0809	..UNION	1	
88	MOOZZ	MOO			30554	69-668-2	..CHAIN, WELDLESS MAKE FROM P/N RR-C-271 TY2CL6 (80244), 13 LINKS REQD	1	
89	PAOZZ	PAOZZ			30554	88-20551-1	..HOSE ASSEMBLY, NONME	1	
90	NOT USED								

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7) USMC QTY PER EQUIP
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	
91	NOT USED								
92	XDOZZ	XB			30554	88-22748	.BRACKET, SUPPORT UOC: EMK, YNN	1	
93	PAOZZ	PAOZZ			30554	88-22765	.ADAPTER, STRAIGHT, TUBE UOC: EMK, YNN	1	
94	MOOZZ	MOO			30554	88-21604-396	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-4 (30554), 11 INCHES REQUIRED UOC: EMK	1	
94	MOOZZ	MOO			30554	88-21605-396	.HOSE, NONMETALLIC MAKE FROM P/N 88-20579-4 (30554), 11 INCHES REQUIRED UOC: YNN	1	
95	PAOZZ	PAOZZ			96906	MS51500B4-4Z	.ADAPTER, STRAIGHT, PI	1	
96	PAOZZ	PAOZZ			80204	B1821BH025 C075N	.SCREW, CAP, HEX HEAD	2	
97	PAOZZ	PAOZZ			30554	88-22643	..CHASSIS ASSY, FL SW MOD	1	
98	PAOZZ	PAOZZ			30554	88-22654	..BUSHING, STRAIN RELIEF	2	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

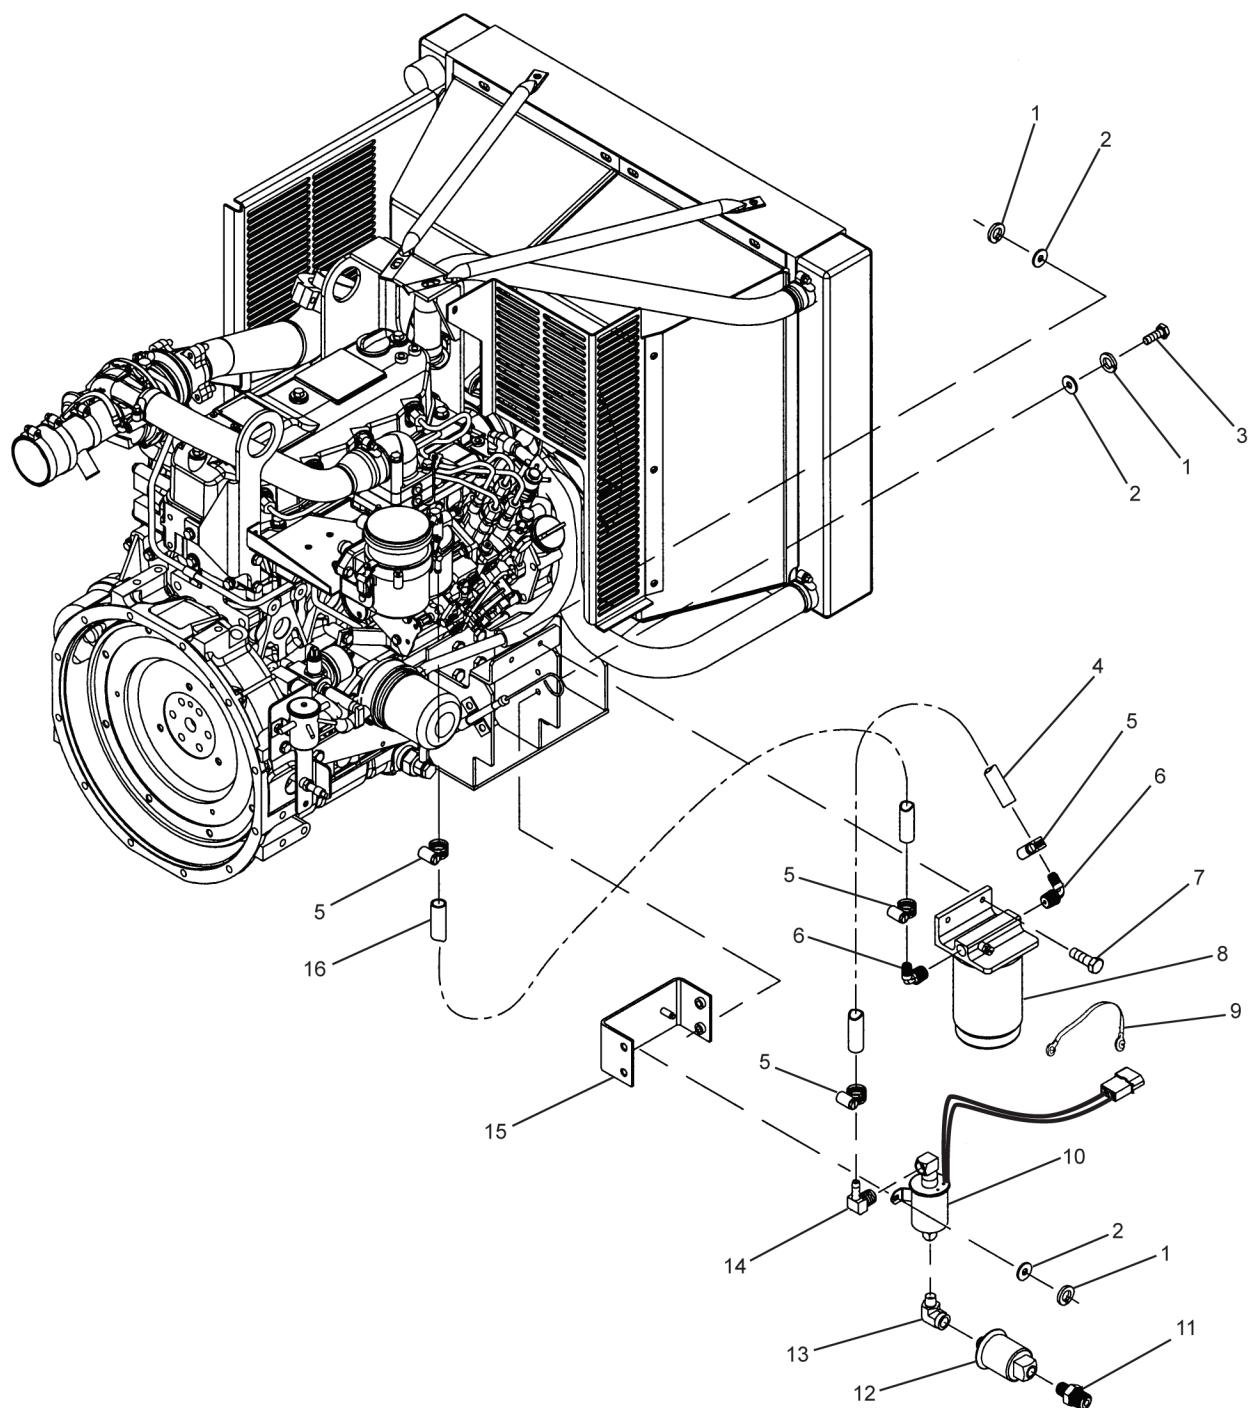


Figure 13.1. Fuel Tank, Lines and Fittings.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
GROUP 06 - FUEL SYSTEM									
FIG. 13.1 FUEL TANK, LINES, AND FITTINGS									
1	PAOZZ				30554	88-20556-38	.WASHER, LOCK UOC: 86Q, 86R	10	
2	PAOZZ				30554	88-20033-22A	.WASHER, FLAT UOC: 86Q, 86R	10	
3	PAOZZ				30554	88-20260-30	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	4	
4	MOO				30554	97-24071	.HOSE, 0.75 DIA., 13.0 IN. MAKE FROM (98411) 208-5 UOC: 86Q, 86R	1	
5	PAOZZ				30554	88-20561-1	.CLAMP, HOSE UOC: 86Q, 86R	4	
6	PAOZZ				81343	4-4 070202C	.ELBOW UOC: 86Q, 86R	2	
7	PAOZZ				30554	88-20260-35	.SCREW/WASHER UOC: 86Q, 86R	2	
8	PAOZZ				30554	88-21101	.FILTER, FLUID UOC: 86Q, 86R	2	
9	PAOZZ				30554	88-20018-1	.STRAP, TIEDOWN, ELECTR UOC: 86Q, 86R	1	
10	PAOZZ				30554	88-24002-1	.PUMP, FUEL UOC: 86Q, 86R	1	
11	PAOZZ				30554	88-21755-4	.ADAPTER, PIPE TO TUBE UOC: 86Q, 86R	1	
12	PAOZZ				30554	00-24000	.FILTER, FUEL UOC: 86Q, 86R	1	
13	PAOZZ				81343	2-2 140239C	.ELBOW UOC: 86Q, 86R	1	
14	PAOZZ				30554	98-19744-03	.FITTING, BEADED TUBE UOC: 86Q, 86R	1	
15	XBOZZ				30554	97-24044	.BRACKET, FUEL PUMP UOC: 86Q, 86R	3	
16	MOO				30554	97-24071	.HOSE, 0.75 DIA., 13.0 IN. MAKE FROM (98441) 208-5 UOC: 86Q, 86R	1	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

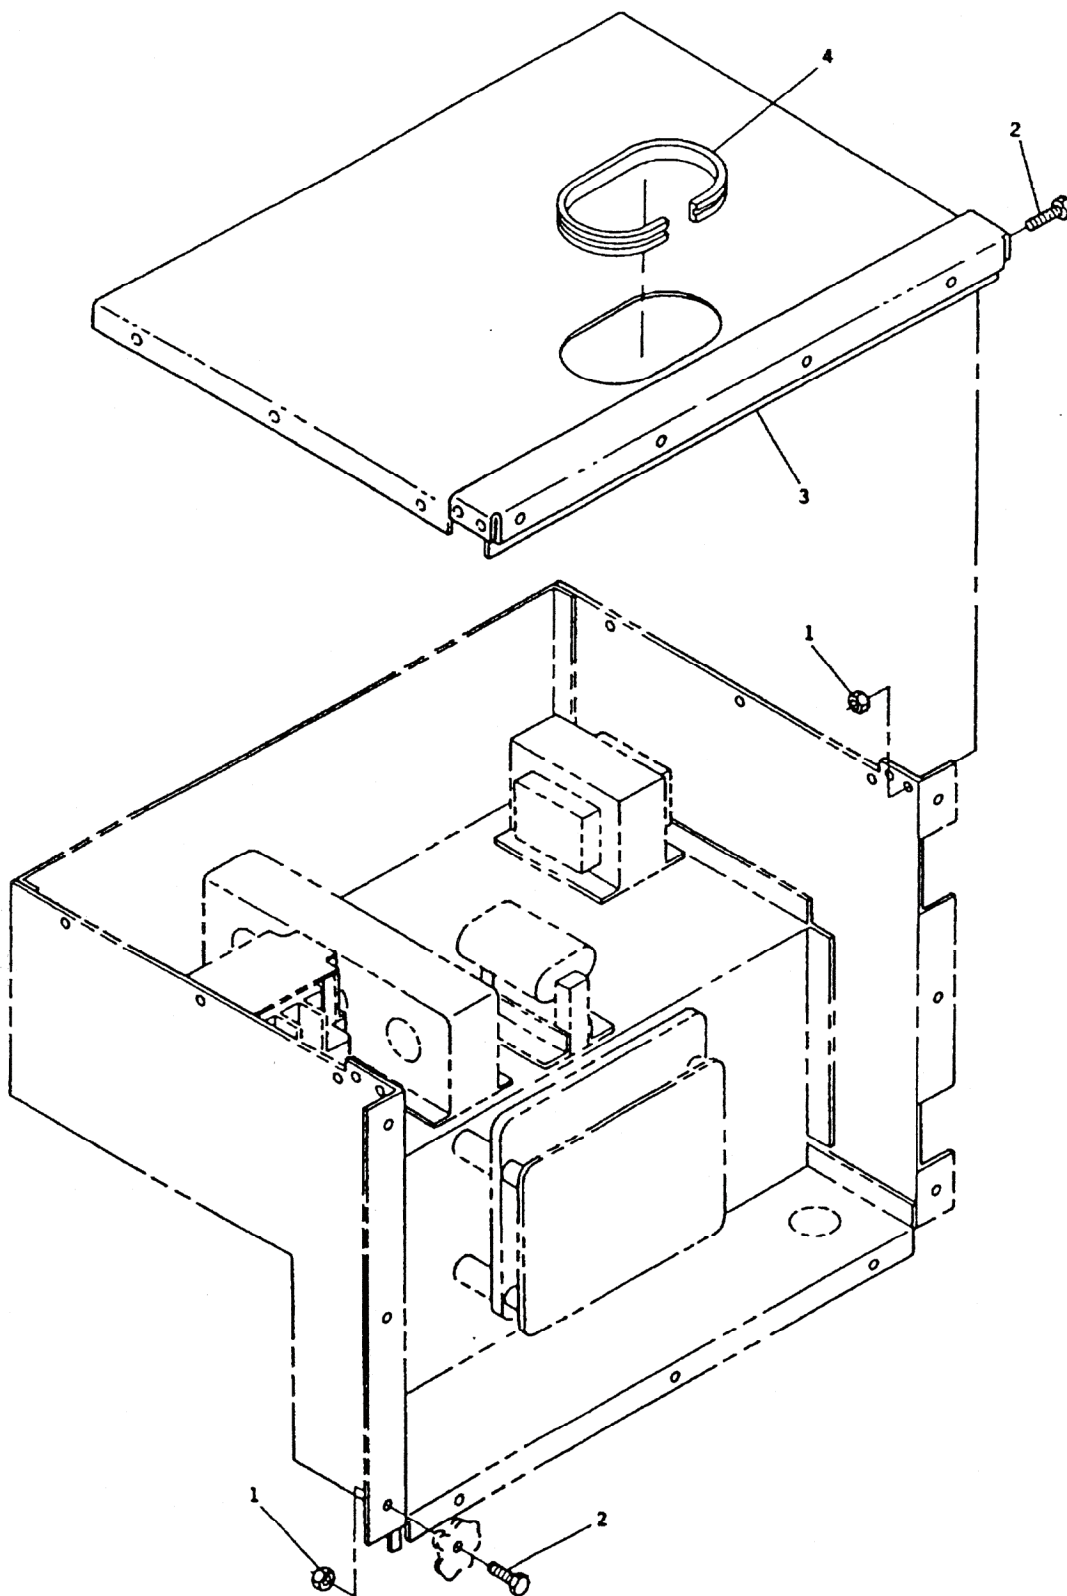


Figure 14. Output Box Installation.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM	ARMY	AIR	NAVY	USMC	FSCM	PART	DESCRIPTION AND		PER
NO.		FORCE				NUMBER	USABLE ON CODE (UOC)	QTY	EQUIP
GROUP 07 - OUTPUT BOX ASSEMBLY									
FIG. 14 OUTPUT BOX INSTALLATION									
1	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	19	
2	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	19	
3	XDOZZ	XB			30554	88-22701	.OUTPUT BOX, TOP	1	
4	MOOZZ	MOO			30554	88-22704	.EDGING, RUBBER MAKE FROM P/N ZX-4134 (1X968), AS REQUIRED	1	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

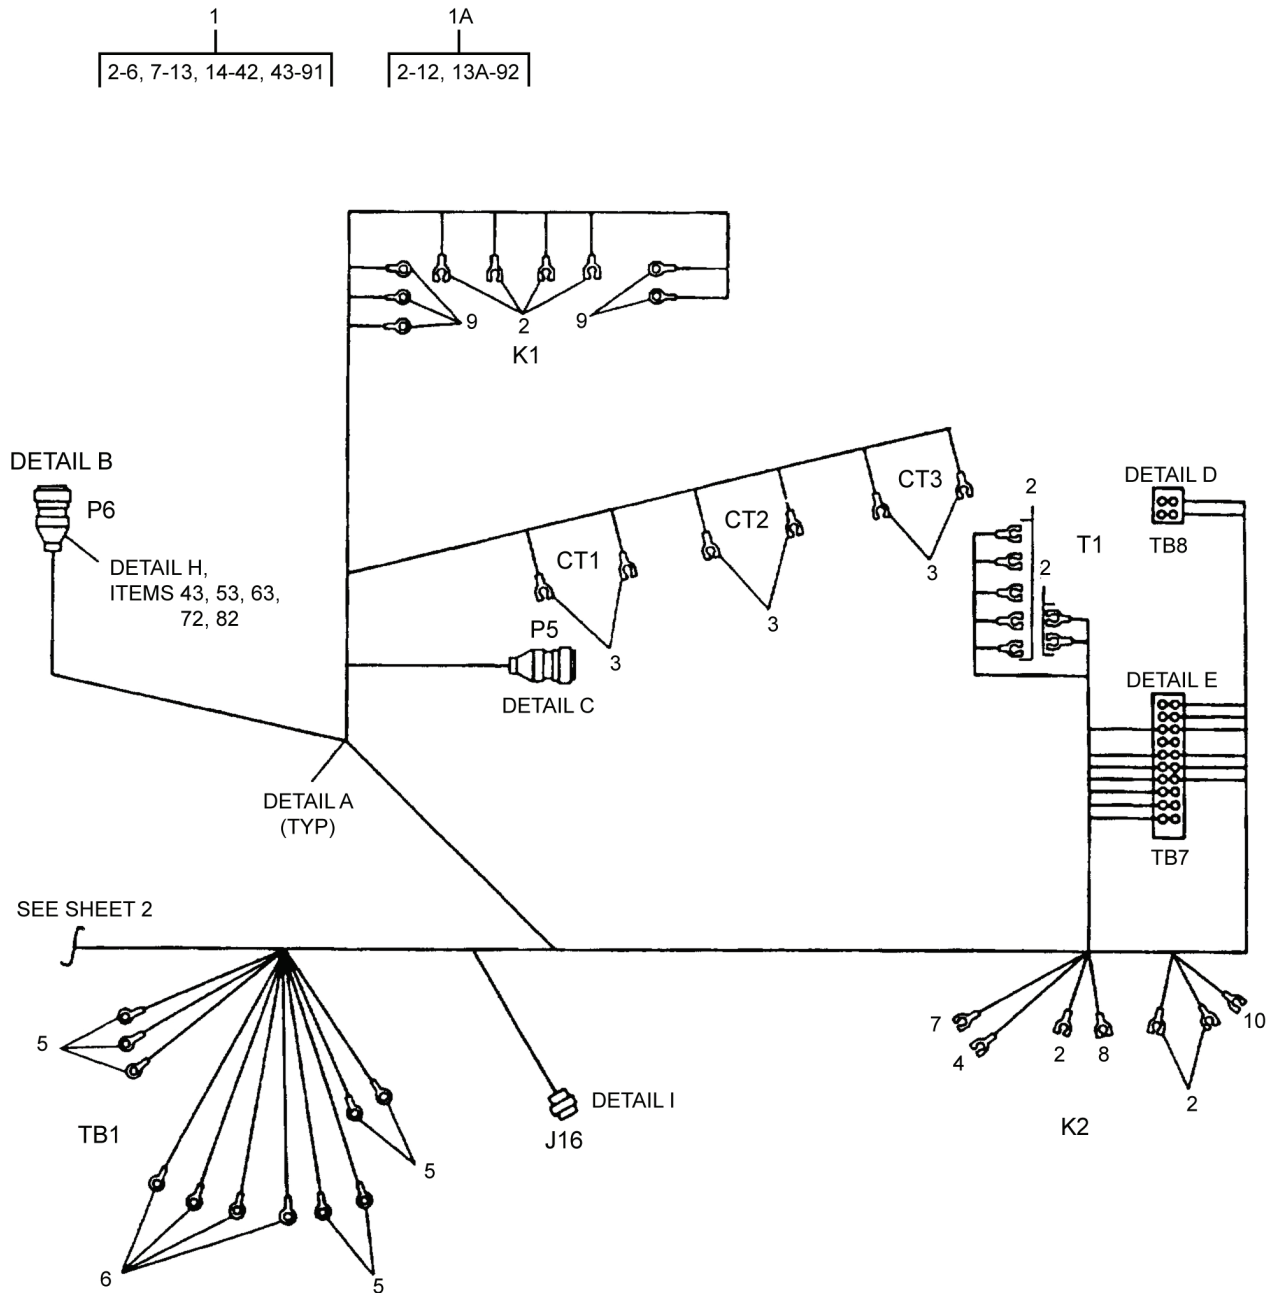


Figure 15. Engine/Output Box Harness (Sheet 1 of 8).

SECTION II. REPAIR PARTS LIST (CONTINUED)

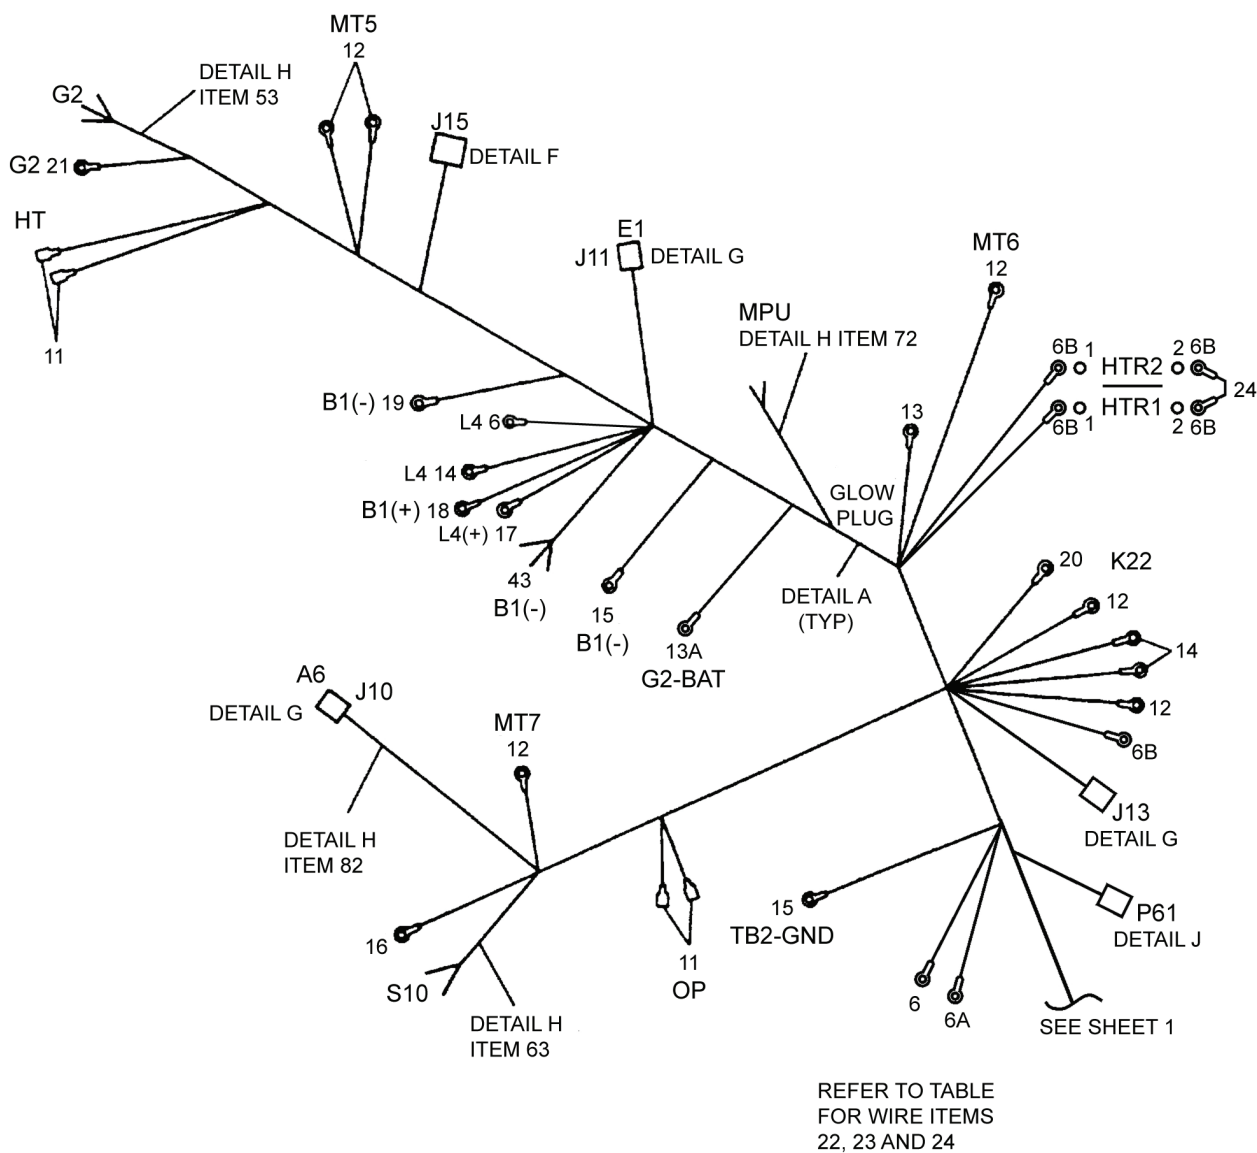


Figure 15. Engine/Output Box Harness (Sheet 2 of 8).

SECTION II. REPAIR PARTS LIST (CONTINUED)

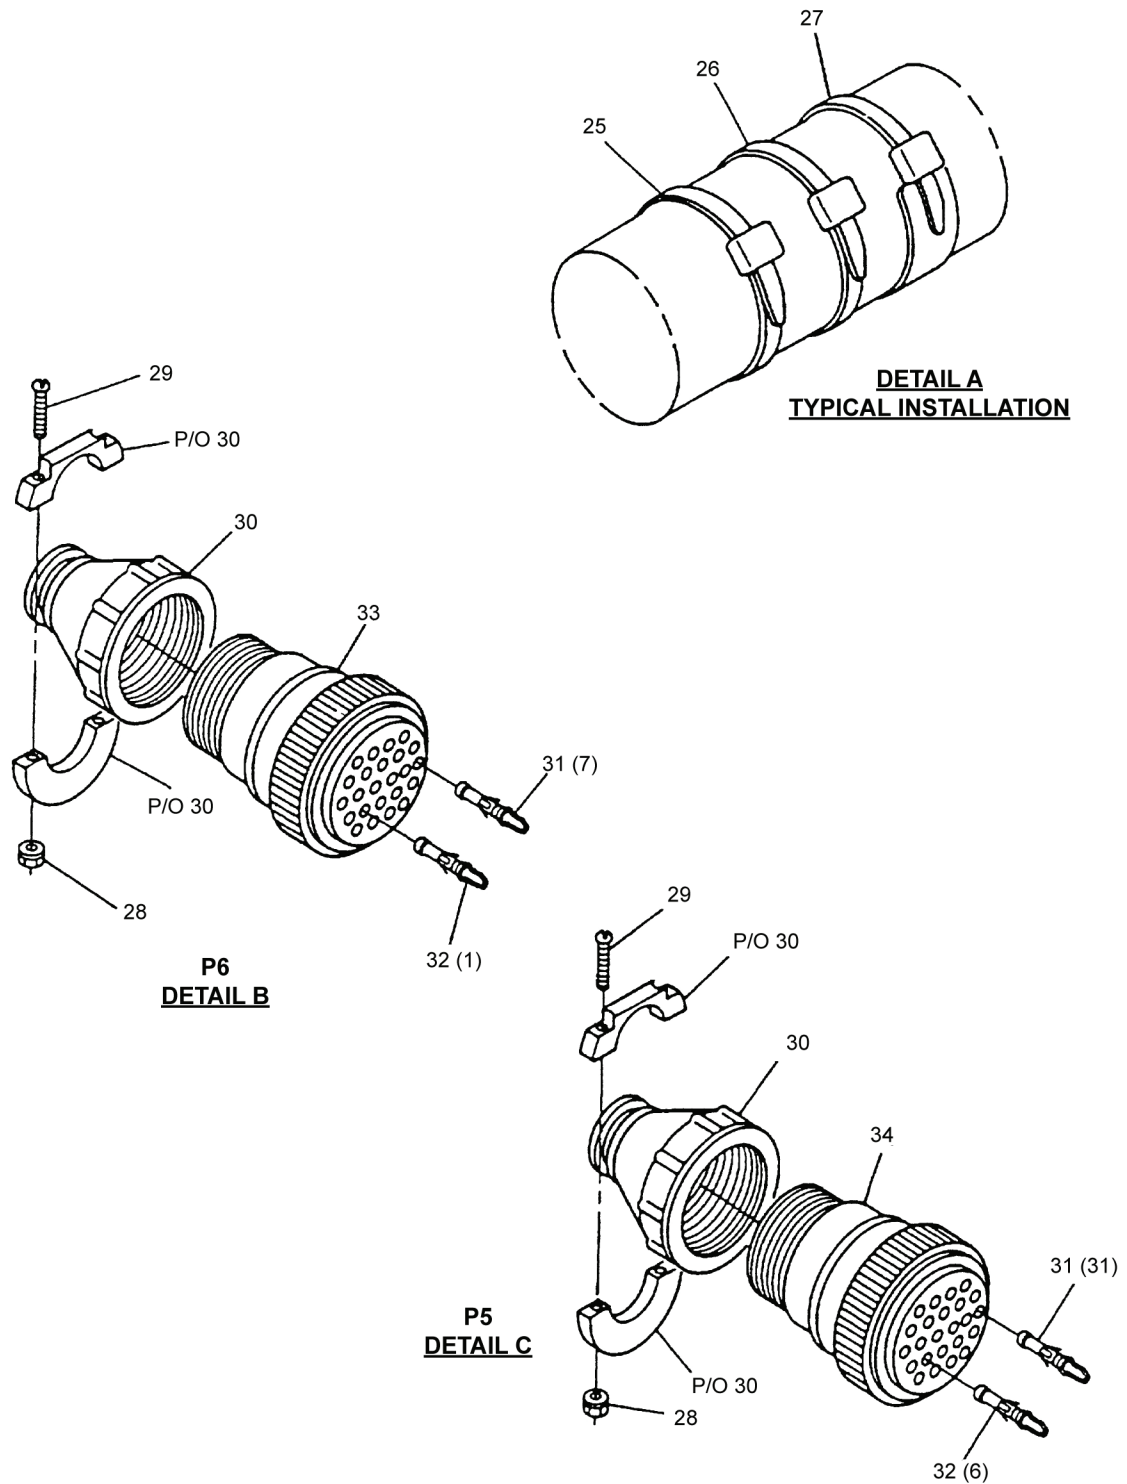


Figure 15. Engine/Output Box Harness (Sheet 3 of 8).

SECTION II. REPAIR PARTS LIST (CONTINUED)

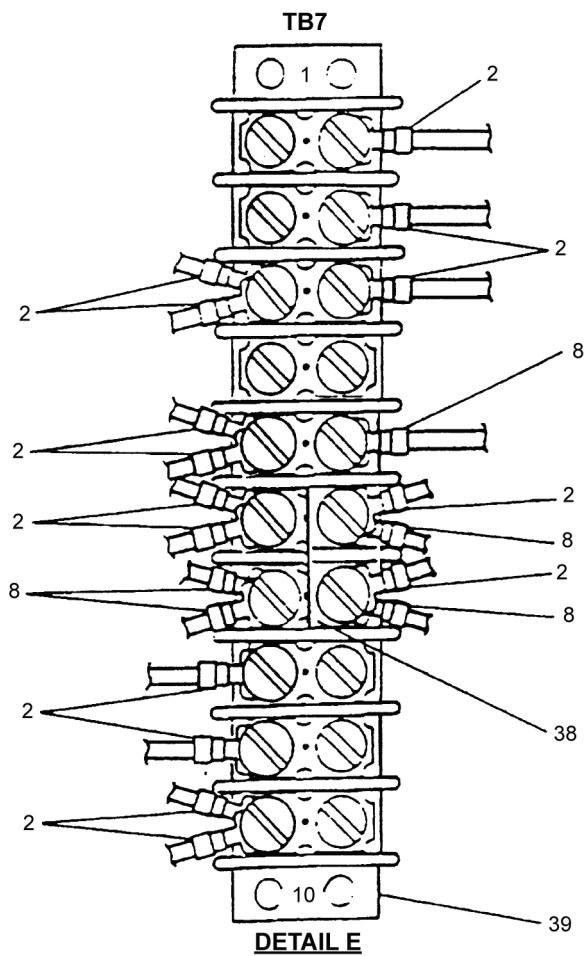
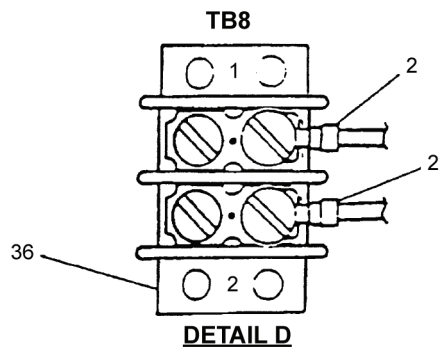


Figure 15. Engine/Output Box Harness (Sheet 4 of 8).

SECTION II. REPAIR PARTS LIST (CONTINUED)

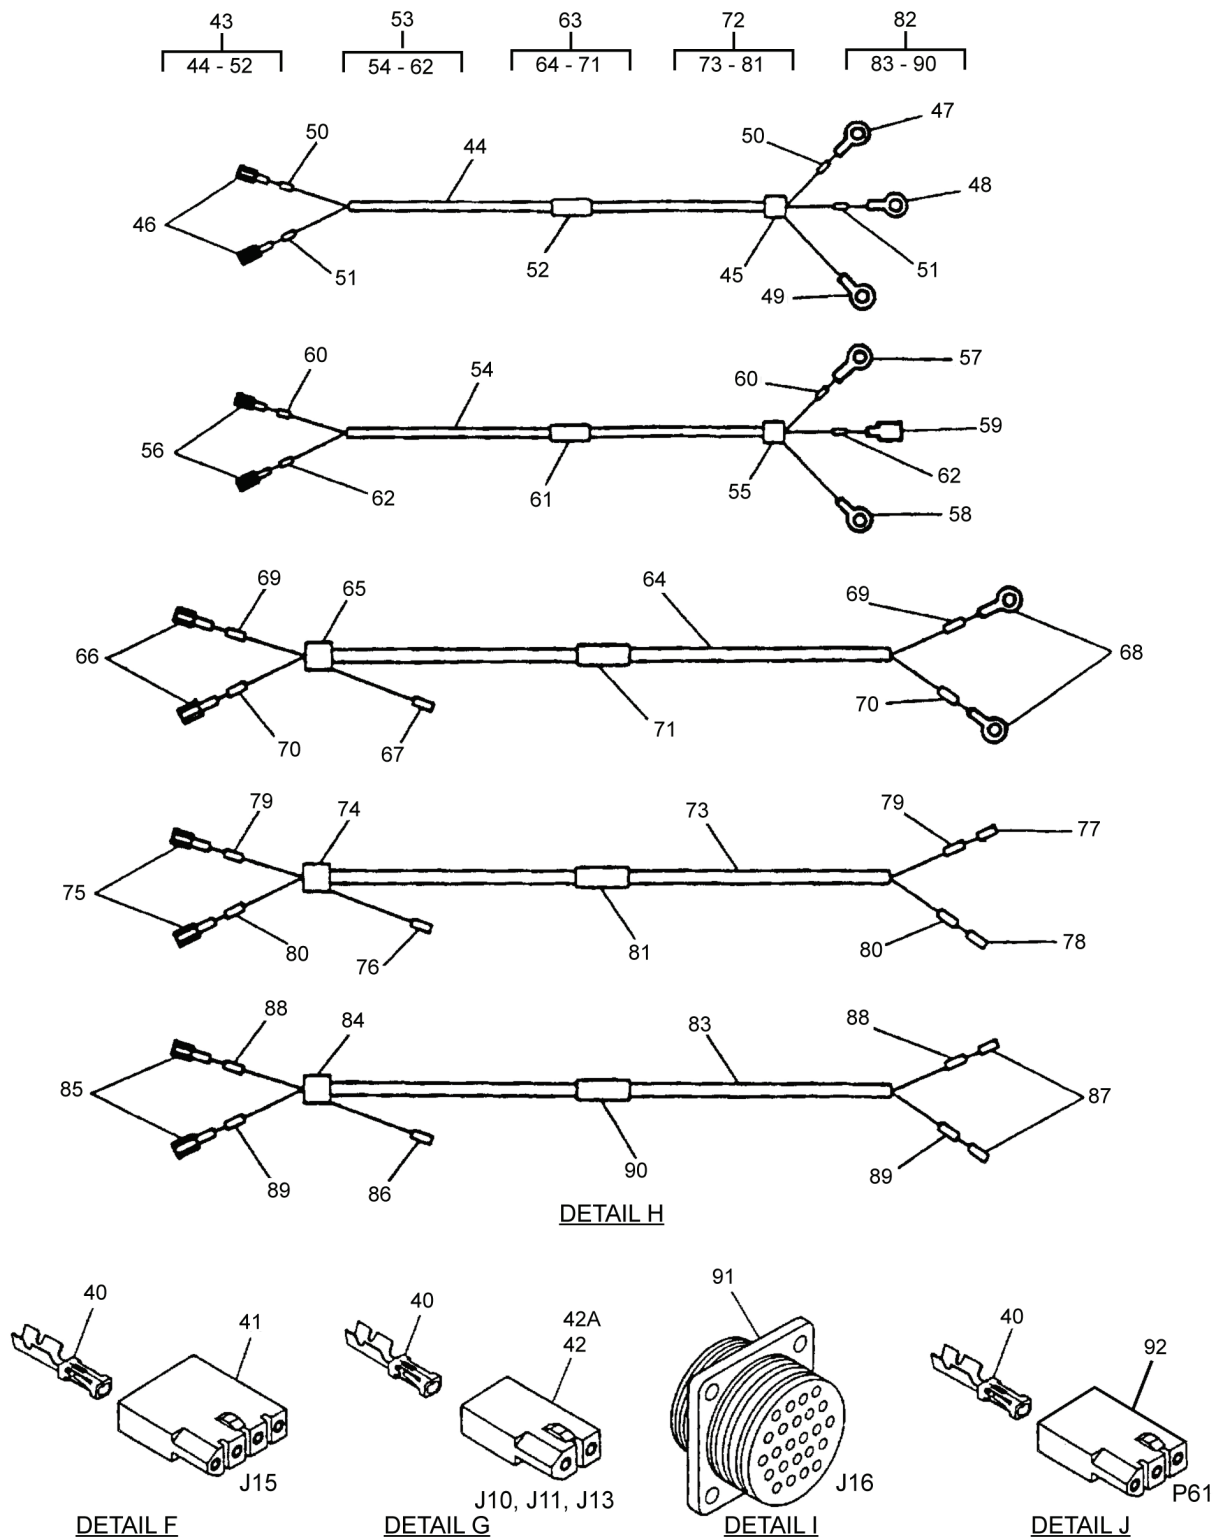


Figure 15. Engine/Output Box Harness (Sheet 5 of 8).

SECTION II. REPAIR PARTS LIST (CONTINUED)

FIG. 15 – WIRE LIST TABLE

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
1	100AU20	MT5-GND	12	TB7-6	2	35	RED	76.0
2	100AW20	K2-X2	2	TB7-10	2	35	RED	7.0
3	100AX16	J16-E	—	TB7-7	8	37	BLACK	36.0
4	100BA20	K22-2	12	TB7-10	2	35	RED	31.5
5	NOT USED							
6	NOT USED							
7	NOT USED							
8	100C10	TB2-GND	15	B1 (—)	15	24	BLACK	41.0
9	100K20	K1-11	2	TB7-6	2	35	RED	44.0
10	100L16	B1 (—)	19	TB7-7	8	37	RED	34.0
11	100M20	J11-2	40	TB7-6	2	35	RED	58.0
12	100P20	J15-4	40	TB7-7	2	35	RED	72.0
13	100R16	G2-E	21	TB7-6	8	37	RED	64.0
14	100S16	K2-X2	8	TB7-7	8	37	RED	12.0
15	101B20	P5-1	31	K1-A1	9	35	BLACK	14.0
16	102B20	P5-2	31	K1-B1	9	35	BLACK	15.0
17	103B20	P5-3	31	K1-C1	9	35	BLACK	16.0
18	185L20	P5-4	31	K1-X	2	35	RED	19.0
19	105A20	P5-5	31	K1-12	2	35	RED	24.5
20	106A20	P5-6	31	TB1-6	5	35	BLACK	28.0
21	107B16	P5-36	32	TB1-7	6	37	BLACK	33.0
22	107C20	TB1-7	5	T1-2	2	35	BLACK	31.0
23	107L16	P5-37	32	TB1-7	6	37	BLACK	33.0
24	108A20	P5-8	31	TB1-8	5	35	BLACK	30.0
25	108D20	TB1-8	5	TB7-8	2	35	BLACK	24.0
26	109A20	P5-9	31	TB1-9	5	35	BLACK	28.0
27	109J20	T1-1	2	TB1-9	5	35	BLACK	27.5
28	110B20	TB1-11	5	TB7-9	2	35	BLACK	24.0
29	110C16	P5-10	32	TB1-12	6	37	BLACK	30.0
30	110D16	P5-11	32	TB1-12	6	37	BLACK	30.0
31	111A20	P5-12	31	CT1-A1	3	35	BLACK	12.0
32	112A20	P5-13	31	CT1-A2	3	35	BLACK	13.0
33	113A20	P5-14	31	CT2-B1	3	35	BLACK	15.0
34	114A20	P5-15	31	CT2-B2	3	35	BLACK	17.0
35	115A20	P5-16	31	CT3-C1	3	35	BLACK	18.0
36	116A20	P5-17	31	CT3-C2	3	35	BLACK	21.0
37	NOT USED							
38	122B20	P5-19	31	K1-B2	9	35	BLACK	25.0
39	123B20	P5-20	31	K1-C2	9	35	BLACK	25.0
40	125A20	P6-23	31	B1 (+)	18	35	RED	52.0
41	NOT USED							
42	131C20	P5-22	31	T1-3	2	35	BLACK	35.0
43	132C20	P5-23	31	T1-4	2	35	BLACK	35.0
44	133C20	P5-24	31	T1-5	2	35	BLACK	34.5
45	135E20	P5-25	31	TB7-1	2	35	BLACK	30.0
46	138C20	P5-26	31	T1-6	2	35	BLACK	34.0
47	139C20	P5-27	31	T1-7	2	35	BLACK	33.5

Figure 15. Engine/Output Box Harness (Sheet 6 of 8).

SECTION II. REPAIR PARTS LIST (CONTINUED)

FIG. 15 – WIRE LIST TABLE

WIRE REF NO.	WIRE MARKING NO.	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	FIG.8 ITEM NO.	MARKING COLOR	WIRE LENGTH
48	140D20	P5-28	31	TB8-1	2	35	BLACK	31.0
49	141D20	P5-29	31	TB8-2	2	35	BLACK	30.5
50	142C20	P5-30	31	TB7-2	2	35	BLACK	29.0
51	NOT USED							
52	165E12	K22-3	20	K2-A1	10	23	RED	36.5
53	165F8	K22-3	14	L4-1	14	22	RED	40.0
54	NOT USED							
55	166A16	K2-A2	7	L4 (+)	17	37	RED	38.0
56	166B20	P6-22	31	K2-A2	4	35	RED	22.0
57	167A20	K2-X1	2	S10-1	16	35	RED	81.0
58	167B20	P6-21	31	K2-X1	2	35	RED	23.0
59	168A20	OP-C	11	TB7-5	2	35	RED	82.0
60	168B20	HT-C	11	TB7-5	2	35	RED	85.0
61	168C16	P6-5	32	TB7-5	8	37	RED	28.0
62	169A20	P6-20	31	OP-NC	11	35	RED	82.0
63	171D20	P6-19	31	J15-3	40	35	RED	74.0
64	172D20	P6-18	31	K22-1	12	35	RED	44.0
65	173B20	P5-31	31	J15-2	40	35	RED	75.0
66	174A20	J15-1	40	TB7-3	2	35	RED	70.0
67	174B20	J11-1	40	TB7-3	2	35	RED	59.0
68	174C20	P5-32	31	TB7-3	2	35	RED	29.0
69	175B20	P5-33	31	MT5	12	35	RED	84.0
70	176B20	P5-34	31	MT6	12	35	RED	55.0
71	177B20	P5-35	31	MT7	12	35	RED	77.0
72	NOT USED							
73	223B20	P6-6	31	HT-NO	11	35	RED	41.0
74	191B16	P5-18	32	J16-B	–	37	BLACK	24.0
75	193B16	P5-21	32	J16-A	–	37	BLACK	24.0
76	NOT USED							
77	240A20	P5-7	31	K1-Y	2	35	RED	22.5
78	243A8	K22-4	14	GLO- PLUG (EMK, YNN)	13	22	RED	17.5

USABLE ON 86Q, 86R ONLY

78	243A8	K22-4	14	HTR1-1	6B	22	RED	17.5
79	NOT USED							
80	225P16	P61-1	40	J13-1	40	37	RED	40.0
81	100FP16	J13-2	40	ENG GND	6	37	RED	25.0
82	164M16	P61-2	40	G2-BAT	13A	37	RED	26.0
83	165S16	P61-3	40	L4-1	6	37	RED	48.5
84	JUMPER	HTR1-2	6B	HTR2-2	6B	22	N/A	4.0
85	100HTR	HTR2-1	6B	ENG GND	6A	22	RED	21.5

Figure 15. Engine/Output Box Harness (Sheet 7 of 8).

SECTION II. REPAIR PARTS LIST (CONTINUED)

SHIELDED CABLE CONNECTION TABLE						
CABLE ITEM NO.	WIRE	FROM	FIG.8 ITEM NO.	TO	FIG.8 ITEM NO.	WIRE LENGTH
43	(SHIELD)	(CUTOFF)	-	B1 (-)	49	59.0
	100D16	P6-1	46	B1 (-)	47	59.0
	165C16	P6-2	46	L4-1	48	59.0
53	(SHIELD)	(CUTOFF)	-	G2-E	58	76.0
	164D16	P6-4	56	G2-BAT	57	76.0
	248A16	P6-3	56	G2-R	59	76.0
63	(SHIELD)	P6-9	67	(CUTOFF)	-	55.0
	163D16	P6-7	66	S10-2	68	55.0
	178A16	P6-8	66	S10-3	68	55.0
72	(SHIELD)	P6-12	76	(CUTOFF)	-	49.0
	147B16	P6-10	75	MPU-1	78	49.0
	148B16	P6-11	75	MPU-2	77	49.0
82	(SHIELD)	P6-15	86	(CUTOFF)	-	50.0
	149B16	P6-13	85	J10-1	87	50.0
	150B16	P6-14	85	J10-2	87	50.0

Figure 15. Engine/Output Box Harness (Sheet 8 of 8).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
							GROUP 07 - OUTPUT BOX ASSEMBLY		
							FIG. 15 ENGINE/OUTPUT BOX HARNESS		
1	PBOFF	PBOOO			30554	88-22164	..WIRING HARNESS, BRAN UOC: EMK, YNN	1	
1A	PBOFF	PBOOO			30554	97-24048	..WIRING HARNESS, BRAN UOC: 86Q, 86R	1	
2	PAOZZ	PAOZZ			30554	88-20274-1	... TERMINAL, SPADE #6, 22-18 AWG	31	
3	PAOZZ	PAOZZ			30554	88-20274-3	...TERMINAL, SPADE #8, 22-18 AWG	6	
4	PAOZZ	PAOZZ			30554	88-20274-4	...TERMINAL, SPADE #10, 22-18 AWG	1	
5	PAOZZ	PAOZZ			96906	MS25036-105	...TERMINAL, LUG	7	
6	PAOZZ	PAOZZ			96906	MS25036-110	...TERMINAL, LUG	6	
6A	PAOZZ	PAOZZ			96906	MS20659-129	...TERMINAL, LUG UOC: 86Q, 86R	1	
6B	PAOZZ	PAOZZ			96906	MS25036-116	...TERMINAL, LUG UOC: 86Q, 86R	4	
7	PAOZZ	PAOZZ			30554	88-20274-6	...TERMINAL, SPADE #10, 16-14 AWG	1	
8	PAOZZ	PAOZZ			30554	88-20274-5	...TERMINAL, SPADE #6, 16-14 AWG	6	
9	PAOZZ	PAOZZ			96906	MS25036-150	...TERMINAL, LUG 1/4, 22-18 AWG	5	
10	PAOZZ	PAOZZ			96906	MS25036-112	...TERMINAL, LUG #10, 12-10 AWG	1	
11	PAOZZ	PAOZZ			30554	88-20275-1	...TERMINAL, QUICK DISC	4	
12	PAOZZ	PAOZZ			96906	MS25036-103	...TERMINAL, LUG	6	
13	PAOZZ	PAOZZ			96906	MS20659-140	...TERMINAL, LUG UOC: EMK, YNN	1	
13A	PAOZZ	PAOZZ			96906	MS25036-109	...TERMINAL, LUG UOC: 86Q, 86R	1	
14	PAOZZ	PAOZZ			96906	MS25036-117	...TERMINAL, LUG	3	
15	PAOZZ	PAOZZ			96906	MS25036-158	...TERMINAL, LUG	2	
16	PAOZZ	PAOZZ			96906	MS25036-101	...TERMINAL, LUG	1	
17	PAOZZ	PAOZZ			96906	MS25036-153	...TERMINAL, LUG	1	
18	PAOZZ	PAOZZ			96906	MS25036-104	...TERMINAL, LUG	1	
19	PAOZZ	PAOZZ			30554	88-22119-12	...TERMINAL, LUG	1	
20	PAOZZ	PAOZZ			96906	MS25036-113	...TERMINAL, LUG	1	
21	PAOZZ	PAOZZ			96906	MS25036-108	...TERMINAL, LUG	1	
22	MOOZZ	MOO			81349	M5086/2-8-9	...WIRE, ELECTRIC	1	
23	MOOZZ	MOO			81349	M5086/2-12-9	...WIRE, ELECTRIC	1	
24	MOOZZ	MOO			81349	M5086/2-10-9	...WIRE, ELECTRIC	1	
25	PAOZZ	PAOZZ			96906	MS3367-5-9	...STRAP, TIEDOWN, ELECT	V	
26	PAOZZ	PAOZZ			96906	MS3367-1-9	...STRAP, TIEDOWN, ELECT	V	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
27	PAOZZ	PAOZZ			96906	MS3368-1-9A	...STRAP, TIEDOWN, ELECT	1	
28	PAOZZ	PAOZZ			30554	69-561-1	...NUT, PLAIN, ASSEMBLED	4	
29	PAOZZ	PAOZZ			30554	69-662-11	...SCREW, ASSEMBLED WAS	4	
30	PAOZZ	PAOZZ			30554	88-21947	...ADAPTER, CABLE CLAMP	2	
31	PAOZZ	PAOZZ			30554	88-21942	...CONTACT, ELECTRICAL	38	
32	PAOZA	PAOZA			30554	88-21944	...CONTACT, ELECTRICAL	7	
33	PAOZA	PAOZA			30554	88-21982	...CONNECTOR BODY, PLUG	1	
34	PAOZZ	PAOZZ			30554	88-21940	...CONNECTOR BODY, PLUG	1	
35	MOOZZ	MOO			81349	M5086/2-20-9	...WIRE, ELECTRIC	1	
36	XDOZZ	XB			30554	88-21181-2	...TERMINAL BLOCK TB8	1	
37	MOOZZ	MOO			81349	M5086/2-16-9	...WIRE, ELECTRIC	1	
38	XDOZZ	XB			30554	88-21183-2	...TERMINAL BLOCK, JUMPER	1	
39	XDOZZ	XB			30554	88-21181-10	...TERMINAL BLOCK TB7	1	
40	PAOZZ	PAOZZ			30554	88-20477	...CONTACT, ELECTRICAL	11	
41	PAOZZ	PAOZZ			30554	88-20474	...CONNECTOR BODY, RECE	1	
42	PAOZZ	PAOZZ			30554	88-20470	...CONNECTOR BODY, RECE	2	
42A	PAOZZ	PAOZZ			30554	88-20470	...CONNECTOR BODY, RECE UOC: 86Q, 86R	1	
43	AFFFF	AOO			30554	88-22101-10	...CABLE ASSY, SHIELDED	1	
44	MFFZZ	MOO			30554	88-22101-10-1	...CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 59 INCHES REQUIRED	1	
45	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 6.5 INCHES	1	
46	PAOZA	PAOZA			30554	88-21944	SOCKET	2	
47	PAOZZ	PAOZZ			30554	88-22119-12	TERMINAL, LUG	1	
48	PAOZZ	PAOZZ			96906	MS25036-109	TERMINAL, LUG	1	
49	PAOZZ	PAOZZ			96906	MS25036-151	TERMINAL, LUG	1	
50	MFFZZ	MOO			30554	88-22629-043	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
51	MFFZZ	MOO			30554	88-22629-044	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
52	MFFZZ	MOO			30554	88-22629-050	MARKER, IDENTIFICATION MAKE FROM P/N M23053/ 5-105-9 (81349), 1.25 INCHES REQUIRED	1	
53	AFFFF	AOO			30554	88-22101-11	...CABLE ASSY, SHIELDED	1	
54	MFFZZ	MOO			30554	88-22101-11-1	...CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 76 INCHES REQUIRED	1	
55	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 6.5 INCHES	1	
56	PAOZA	PAOZA			30554	88-21944	SOCKET	2	
57	PAOZZ	PAOZZ			96906	MS25036-108	TERMINAL, LUG	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
58	PAOZZ	PAOZZ			96906	MS25036-103	TERMINAL, LUG	1	
59	PAOZZ	PAOZZ			30554	88-20275-3	TERMINAL, QUICK DISC	1	
60	MFFZZ	MOO			30554	88-22629-046	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5-105-9 (81349), 1.25 INCHES REQUIRED	2	
61	MFFZZ	MOO			30554	88-22629-051	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
62	MFFZZ	MOO			30554	88-22629-052	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
63	AFFFF	AOO			30554	88-22103-7	...CABLE ASSY, SHIELDED	1	
64	MFFZZ	MOO			30554	88-22103-7-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 55 INCHES REQUIRED	1	
65	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 7 INCHES	1	
66	PAOZA	PAOZA			30554	88-21944	SOCKET	2	
67	PAOZZ	PAOZZ			30554	88-21942	CONTACT, ELECTRICAL	1	
68	PAOZZ	PAOZZ			96906	MS25036-106	TERMINAL, LUG	2	
69	MFFZZ	MOO			30554	88-22629-063	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 1.25 INCHES LONG	2	
70	MFFZZ	MOO			30554	88-22629-064	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	2	
71	MFFZZ	MOO			30554	88-22629-074	MARKER, IDENTIFICATION MAKE FROM P/N M23053/5- 105-9 (81349), 1.25 INCHES REQUIRED	1	
72	AFFFF	AOO			30554	88-22103-8	...CABLE ASSY, SHIELDED	1	
73	MFFZZ	MOO			30554	88-22103-8-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 49 INCHES REQUIRED	1	
74	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 7 INCHES	1	
75	PAOZA	PAOZA			30554	88-21944	SOCKET	2	
76	PAOZZ	PAOZZ			30554	88-21942	CONTACT, ELECTRICAL	1	
77	PAOZZ	PAOZZ			30554	88-20275-3	TERMINAL, QUICK DISC	1	
78	PAOZZ	PAOZZ			30554	88-20275-4	TERMINAL, QUICK DISC	1	
79	MFFZZ	MOO			30554	88-22629-066	MARKER, IDENTIFICATION MAKE FROM P/N M23053/ 5-105-9 (81349), 1.25 INCHES REQUIRED	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
80	MFFZZ	MOO			30554	88-22629-067	MARKER, IDENTIFICATION MAKE FROM P/N M23053/ 5-105-9 (81349), 1.25 INCHES REQUIRED	2	
81	MFFZZ	MOO			30554	88-22629-075	MARKER, IDENTIFICATION MAKE FROM P/N M23053/ 5-105-9 (81349), 1.25 INCHES REQUIRED	1	
82	AFFFF	AOO			30554	88-22103-9	...CABLE ASSY, SHIELDED	1	
83	MFFZZ	MOO			30554	88-22103-9-1	CABLE, SHIELDED MAKE FROM P/N M27500-16TE2T14 (81349), 50 INCHES REQUIRED	1	
84	PAFZZ	PAOZZ			30554	88-20596-1	SHIELD, TERMINATION CUT WIRE LEAD TO 7 INCHES	1	
85	PAOZA	PAOZA			30554	88-21944	SOCKET	2	
86	PAOZZ	PAOZZ			30554	88-21942	CONTACT, ELECTRICAL	1	
87	PAOZZ	PAOZZ			30554	88-20477	CONTACT, ELECTRICAL	2	
88	MFFZZ	MOO			30554	88-22629-069	MARKER, IDENTIFICATION MAKE FROM P/N M23053/ 5-105-9 (81349), 1.25 INCHES REQUIRED	2	
89	MFFZZ	MOO			30554	88-22629-070	MARKER, IDENTIFICATION MAKE FROM P/N M23053/ 5-105-9 (81349), 1.25 INCHES REQUIRED	2	
90	MFFZZ	MOO			30554	88-22629-076	MARKER, IDENTIFICATION MAKE FROM P/N M23053/ 5-105-9 (81349), 1.25 INCHES REQUIRED	1	
91	PAFZA	PAFZA			96906	MS3102R18 -11P	...CONNECTOR, RECEPTACL J16	1	
92	PAOZZ	PAOZZ			30554	88-20472	...CONNECTOR BODY, RECE UOC: 86Q, 86R	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

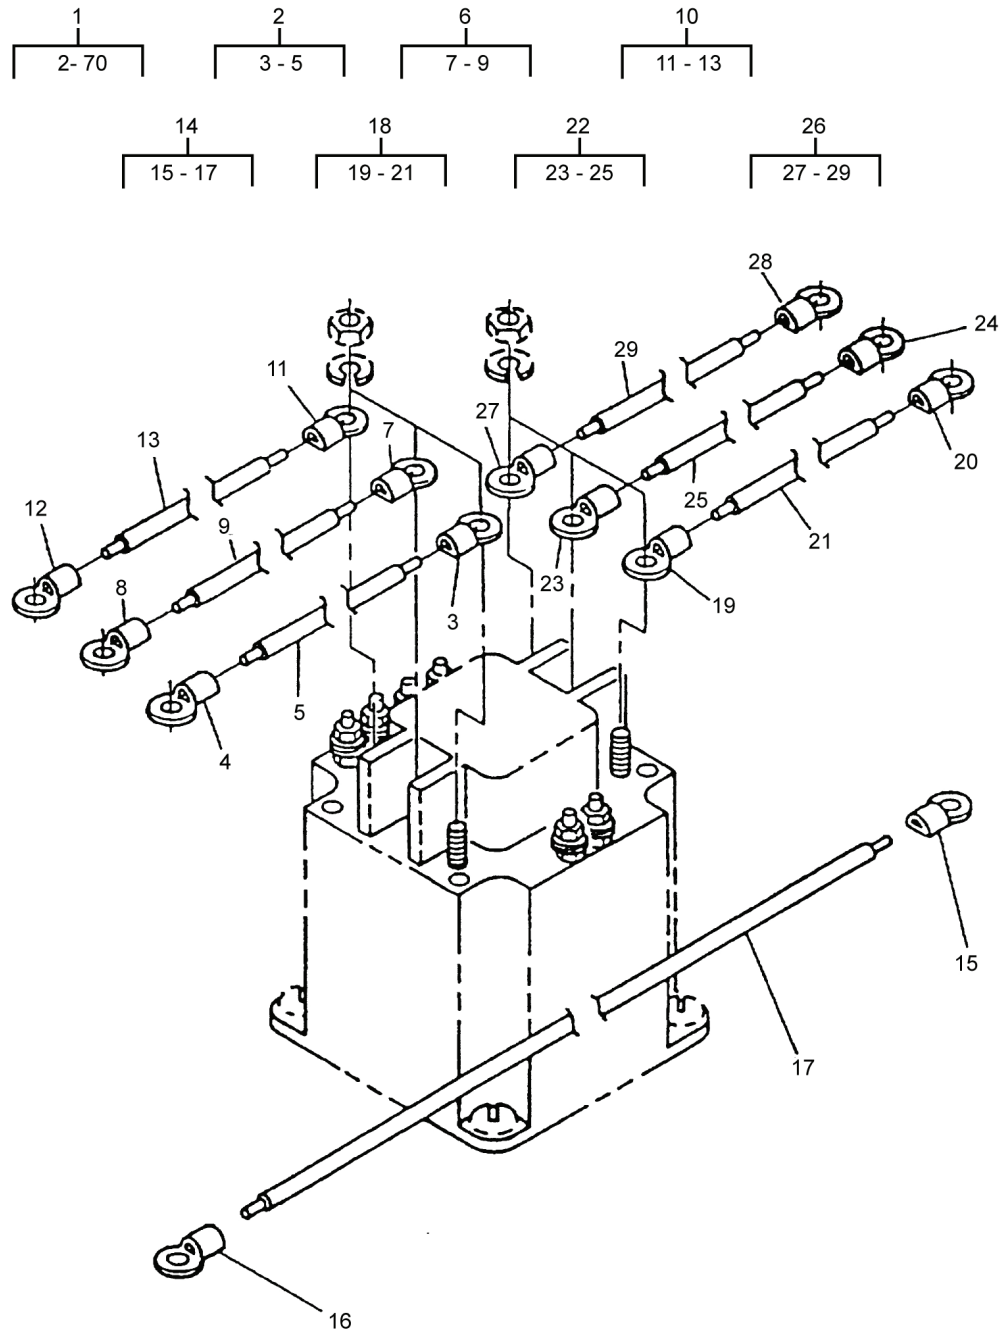


Figure 16. Output Box Assembly (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

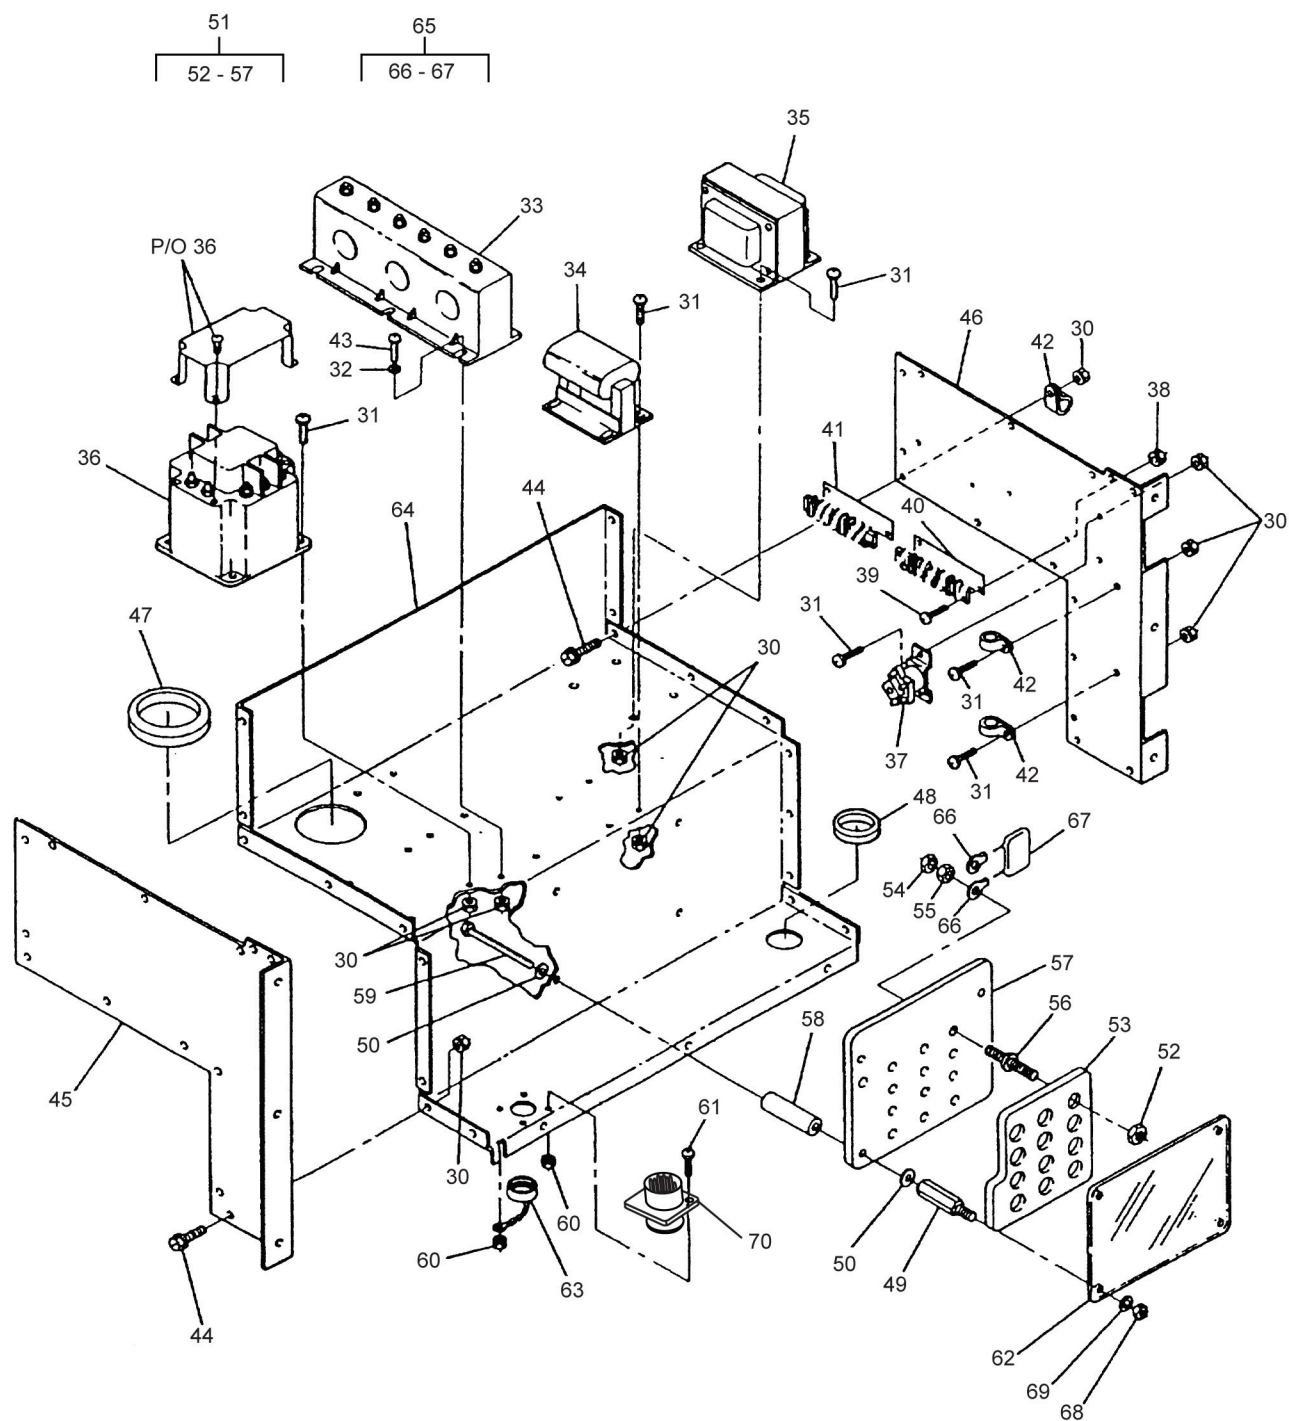


Figure 16. Output Box Assembly (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
							GROUP 07 - OUTPUT BOX ASSEMBLY		
							FIG. 16 OUTPUT BOX ASSEMBLY		
1	XDOOO	XB			30554	88-21580	.OUTPUT BOX ASSY 60 HZ UOC: EMK	1	
1	XDOOO	XB			30554	88-21582	.OUTPUT BOX ASSY 400 HZ UOC: YNN	1	
1	XDOOO	XB			30554	97-24082	.OUTPUT BOX ASSY 50/60 HZ AND 400 HZ UOC: 86Q, 86R	1	
2	AOOOO	AOO			30554	88-22126-1	..CABLE ASSY, AC POWER	1	
3	PAOZZ	PAOZZ			30554	88-22119-3	...TERMINAL, LUG	1	
4	PAOZZ	PAOZZ			96906	MS25036-127	...TERMINAL, LUG	1	
5	MOOZZ	MOO			30554	88-22126-1-1	...WIRE, ELECTRIC MAKE FROM P/N M5086/2-2-9 (81349), 14.5 INCHES REQUIRED	1	
6	AOOOO	AOO			30554	88-22126-2	..CABLE ASSY, AC POWER	1	
7	PAOZZ	PAOZZ			30554	88-22119-3	...TERMINAL, LUG	1	
8	PAOZZ	PAOZZ			96906	MS25036-127	...TERMINAL, LUG	1	
9	MOOZZ	MOO			30554	88-22126-2-1	...WIRE, ELECTRIC MAKE FROM P/N M5086/2-2-9 (81349), 17.0 INCHES REQUIRED	1	
10	AOOOO	AOO			30554	88-22126-3	..CABLE ASSY, AC POWE		
11	PAOZZ	PAOZZ			30554	88-22119-3	...TERMINAL, LUG	1	
12	PAOZZ	PAOZZ			96906	MS25036-127	...TERMINAL, LUG	1	
13	MOOZZ	MOO			30554	88-22126-3-1	...WIRE, ELECTRIC MAKE FROM P/N M5086/2-2-9 (81349), 20.0 INCHES REQUIRED	1	
14	AOOOO	AOO			30554	88-22126-4	..CABLE ASSY, AC POWER	1	
15	PAOZZ	PAOZZ			96906	MS25036-127	...TERMINAL, LUG	1	
16	PAOZZ	PAOZZ			96906	MS25036-128	...TERMINAL, LUG	1	
17	MOOZZ	MOO			30554	88-22126-4-1	...WIRE, ELECTRIC MAKE FROM P/N M5086/2-2-9 (81349), 41.0 INCHES REQUIRED	1	
18	AOOOO	AOO			30554	88-22126-5	..CABLE ASSY, AC POWER	1	
19	PAOZZ	PAOZZ			30554	88-22119-3	...TERMINAL, LUG	1	
20	PAOZZ	PAOZZ			96906	MS25036-128	...TERMINAL, LUG	1	
21	MOOZZ	MOO			30554	88-22126-5-1	...WIRE, ELECTRIC MAKE FROM P/N M5086/2-2-9 (81349), 31 INCHES REQUIRED	1	
22	AOOOO	AOO			30554	88-22126-6	..CABLE ASSY, AC POWER	1	
23	PAOZZ	PAOZZ			30554	88-22119-3	...TERMINAL, LUG	1	
24	PAOZZ	PAOZZ			96906	MS25036-128	...TERMINAL, LUG	1	
25	MOOZZ	MOO			30554	88-22126-6-1	...WIRE, ELECTRIC MAKE FROM P/N M5086/2-2-9 (81349), 33.0 INCHES REQUIRED	1	
26	AOOOO	AOO			30554	88-22126-7	..CABLE ASSY, AC POWER	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
27	PAOZZ	PAOZZ			30554	88-22119-3	...TERMINAL, LUG	1	
28	PAOZZ	PAOZZ			96906	MS25036-128	...TERMINAL, LUG	1	
29	MOOZZ	MOO			30554	88-22126-7-1	...WIRE, ELECTRIC MAKE FROM P/N M5086/2-2-9 (81349), 35.0 INCHES REQUIRED	1	
30	PAOZZ	PAOZZ			30554	69-561-6	..NUT, PLAIN, ASSEMBLED	40	
31	PAOZZ	PAOZZ			30554	69-662-64	..SCREW, ASSEMBLED WAS	22	
32	PAOZZ	PAOZZ			96906	MS51412-2	..WASHER, FLAT	6	
33	XDOZZ	XB			30554	88-21131	..TRANSFORMER, CURRENT	1	
34	PAOZZ	PAOZZ			30554	88-21015	..TRANSFORMER, CURRENT	1	
35	PAOZZ	PAOZZ			30554	01-21504-2	..TRANSFORMER, POWER, UOC: YNN, 86R	1	
35	PAOZZ	PAOZZ			30554	01-21504-1	..TRANSFORMER, POWER, UOC: EMK, 86Q	1	
36	PAOZZ	PAOZZ			30544	88-21066	..CONTACTOR, MAGNETIC	1	
37	PAOZZ	PAOZZ			30554	88-21082	..RELAY, ELECTROMAGNET	1	
38	PAOZZ	PAOZZ			30554	69-561-3	..NUT, PLAIN, ASSEMBLED	4	
39	PAOZZ	PAOZZ			30554	69-662-36	..SCREW, ASSEMBLED WAS	4	
40	XDOZZ	XB			30554	88-21182-10	..MARKER, STRIP	1	
41	XDOZZ	XB			30554	88-21182-2	..MARKER, STRIP	1	
42	PAOZZ	PAOZZ			96906	MS21333-76	..CLAMP, LOOP	3	
43	PAOZZ	PAOZZ			78189	69-662-65	..SCREW, ASSEMBLED	6	
44	PAOZZ	PAOZZ			30554	88-20260-21	..SCREW, HEX WASHERHEAD	18	
45	XDOZZ	XB			30554	88-21932	..PANEL, OUTPUT BOX, LS	1	
46	XDOZZ	XB			30554	88-22060	..PANEL, OUTPUT BOX, RS	1	
47	PAOZZ	PAOZZ			30554	88-22122	..GROMMET, NONMETALLIC	1	
48	PAOZZ	PAOZZ			96906	MS35489-27	..GROMMET, NONMETALLIC	1	
49	PAOZZ	PAOZZ			30554	72-2098-2	..POST, ELECTRICAL-MEC	4	
50	PAOZZ	PAOZZ			96906	MS51412-4	..WASHER, FLAT	8	
51	PAOZZ	PAOZZ			30554	88-22437	..TERMINAL BOARD, ASSY	1	
52	PAOZZ	PAOZZ			30554	88-22786	...NUT, SELF-LOCKING, HEX	13	
53	PAOZZ	PAOZZ			30554	88-22436	...TERMINAL BOARD	1	
54	PAOZZ	PAOZZ			30554	88-21930-1	...NUT, SELF-LOCKING, HEX	13	
55	PAOZZ	PAOZZ			30554	72-2062-1	...NUT, PLAIN, HEX	13	
56	PAOZZ	PAOZZ			30554	72-2236	...TERMINAL, STUD	13	
57	PAOZZ	PAOZZ			30554	72-2213	...TERMINAL BOARD	1	
58	XDOZZ	XB			30554	88-21669	..MOUNT, RECONNECTION	1	
59	PAOZZ	PAOZZ			96906	MS51493-2	..SCREW, MACHINE	4	
60	PAOZZ	PAOZZ			30554	69-561-1	..NUT, PLAIN, ASSEMBLED	4	
61	PAOZZ	PAOZZ			30554	69-662-5	..SCREW, ASSEMBLED WASH	4	
62	PAOZZ	PAOZZ			30554	88-22509	..COVER, PROTECTIVE	1	
63	PAOZZ	PAOZZ			30554	88-20548-1	..COVER, ELECTRICAL CON	1	
64	XDOZZ	XB			30554	88-22039	..PANEL, OUTPUT BOX, REAR	1	
65	AOOOOAOO				30554	88-22758	..CAPACITOR ASSY, EMI	3	
66	PAOZZ	PAOZZ			96906	MS20659-125	...TERMINAL, LUG	2	
67	PAOZZ	PAOZZ			30554	88-22757-2	...CAPACITOR	1	
68	PAOZZ	PAOZZ			96906	MS51922-2	..NUT, SELF-LOCKING, HEX	4	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7)
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
69	PAOZZ	PAOZZ			96906	MS51412-4	..WASHER, FLAT	4	
70	PBOFF				30554	88-22164	..WIRING HARNESS, BR (SEE FIGURE 15 FOR PARTS BREAKDOWN) UOC: EMK, YNN	REF	
70	PBOFF				30554	97-24048	..WIRING HARNESS, BR (SEE FIGURE 15 FOR PARTS BREAKDOWN) UOC: 86Q, 86R	REF	
							END OF FIGURE		

SECTION II. REPAIR PARTS LIST (CONTINUED)

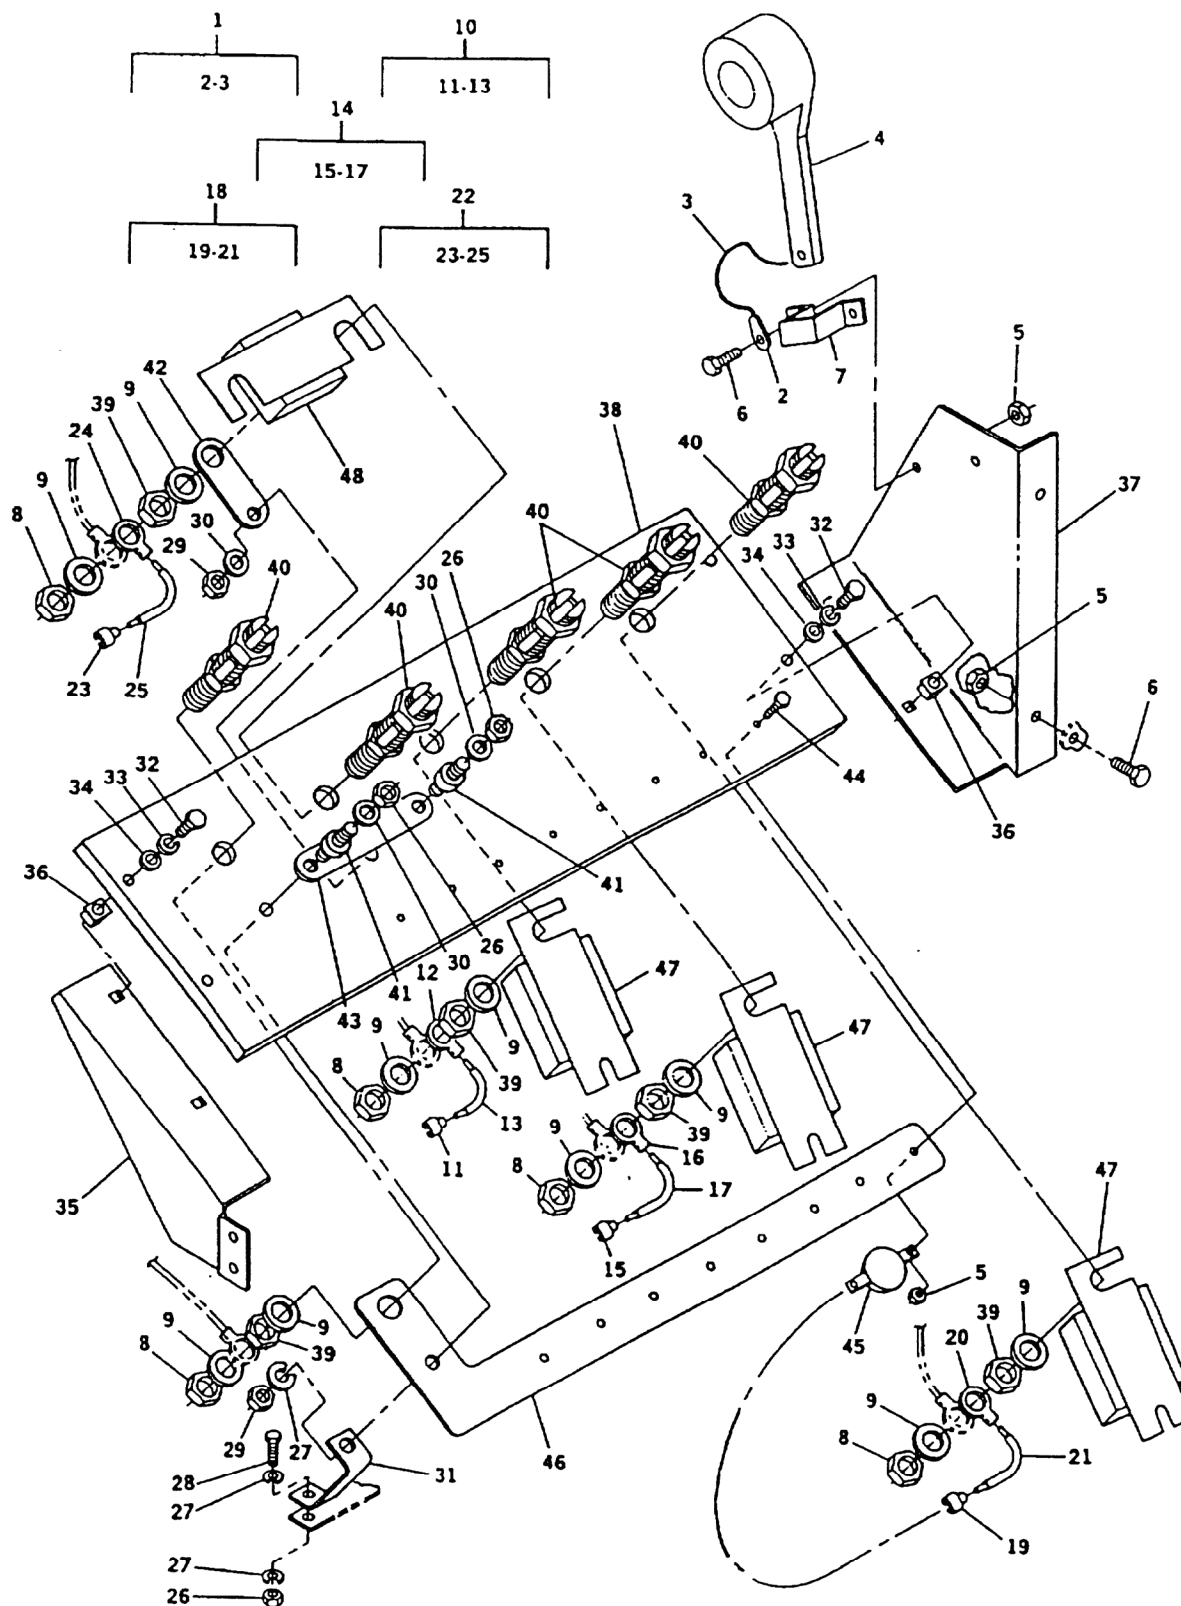


Figure 17. Load Terminal Board.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	PER EQUIP
							GROUP 08 - OUTPUT LOAD TERMINAL BOARD		
							FIG. 17 LOAD TERMINAL BOARD		
1	AOOOO	AOO			30554	88-22469	.CORD, LOAD, WRENCH	1	
2	PAOZZ	PAOZZ			96906	MS20659-144	..TERMINAL, LUG #4 AWG, #10 STUD SIZE	1	
3	MOOZZ	MOO			30554	88-22469-2	..ROPE, FIBROUS MAKE FROM P/N 1-41NDIA (72205), 30 INCHES REQUIRED	1	
4	PAOZZ	PAOZZ			30554	88-21146	.WRENCH, BOX	1	
5	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED	12	
6	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD	12	
7	XDOZZ	XB			30554	88-22136	.BRACKET, WRENCH	1	
8	PAOZZ	PAOZZ			30554	88-21930-2	.NUT, SELF LOCKING	5	
9	PAOZZ	PAOZZ			30554	88-20033-40B	.WASHER, FLAT	10	
10	AOOOO	AOO			30554	88-20305-1	.WIRE, VARISTOR (L1)	1	
11	PAOZZ	PAOZZ			30554	88-20275-3	..TERMINAL, QUICK DISC	1	
12	PAOZZ	PAOZZ			30554	88-22119-12	..TERMINAL, LUG	1	
13	MOOZZ	MOO			30554	88-20305-1-1	..WIRE, ELECTRIC MAKE FROM P/N M5086/2-16-9 (81349), 6.0 INCHES REQUIRED	1	
14	AOOOO	AOO			30554	88-20305-2	.WIRE, VARISTOR (L2)	1	
15	PAOZZ	PAOZZ			30554	88-20275-3	..TERMINAL, QUICK DISC	1	
16	PAOZZ	PAOZZ			30554	88-22119-12	..TERMINAL, LUG	1	
17	MOOZZ	MOO			30554	88-20305-2-1	..WIRE, ELECTRIC MAKE FROM P/N M5086/2-16-9 (81349), 6.0 INCHES REQUIRED	1	
18	AOOOO	AOO			30554	88-20305-3	.WIRE, VARISTOR (L3)	1	
19	PAOZZ	PAOZZ			30554	88-20275-3	..TERMINAL, QUICK DISC	1	
20	PAOZZ	PAOZZ			30554	88-22119-12	..TERMINAL, LUG	1	
21	MOOZZ	MOO			30554	88-20305-3-1	..WIRE, ELECTRIC MAKE FROM P/N M5086/2-16-9 (81349), 6.0 INCHES REQUIRED	1	
22	AOOOO	AOO			30554	88-20305-5	.WIRE, VARISTOR (LO)	10	
23	PAOZZ	PAOZZ			30554	88-20275-3	..TERMINAL, QUICK DISC	1	
24	PAOZZ	PAOZZ			30554	88-22119-12	..TERMINAL, LUG	1	
25	MOOZZ	MOO			30554	88-20305-5-1	..WIRE, ELECTRIC MAKE FROM P/N M5086/2-16-9 (81349). 6.0 INCHES REQUIRED	1	
26	PAOZZ	PAOZZ			30554	88-22786	.NUT, SELF-LOCKING, HEX	3	
27	PAOZZ	PAOZZ			30554	88-22792-2	.WASHER, LOCK	3	
28	PAOZZ	PAOZZ			80204	B1821BH03 8C075N	.SCREW, CAP, HEX HEAD	1	
29	PAOZZ	PAOZZ			30554	88-21930-1	.NUT, SELF-LOCKING, HEX	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
30	PAOZZ	PAOZZ			30554	88-20033-26B	.WASHER, FLAT	3	
31	XDOZZ	XB			30554	88-22459	.STRAP, GROUND	1	
32	PAOZZ	PAOZZ			80204	B1821BH02 5C125N	.SCREW, CAP, HEX HEAD	4	
33	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	4	
34	PAOZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT	4	
35	XDOZZ	XB			30554	88-21767	.SUPPORT, LOAD BOARD	1	
36	PAOZZ	PAOZZ			30554	88-21674-3	.NUT, CAGE	4	
37	XDOZZ	XB			30554	88-21933	.SUPPORT, LOAD BOARD	1	
38	XDOZZ	XB			30554	88-21666	.BOARD, LOAD TERMINAL	1	
39	PAOZZ	PAOZZ			30554	88-22336-1	.NUT, PLAIN, HEX	5	
40	PAOZZ	PAOZZ			30554	69-692-1	.TERMINAL, STUD	5	
41	PAOZZ	PAOZZ			30554	72-2236	.TERMINAL, STUD	5	
42	XDOZZ	XB			30554	88-22163-1	.BAR, BUS GROUND	1	
43	XDOZZ	XB			30554	88-22146	.BUS, BAR	1	
44	PAOZZ	PAOZZ			30554	88-20260-25	.SCREW, CAP, HEX HEAD	8	
45	PAOZZ	PAOZZ			30554	88-21179	.RESISTOR, VOLTAGE SE	4	
46	XDOZZ	XB			30554	88-21775	.BAR, GROUND PLANE	1	
47	PAOZZ	PAOZZ			30554	88-22761	.FILTER ASSEMBLY, ELE L1, L2, AND L3 UOC: EMK, 86Q	3	
47	PAOZZ	PAOZZ			30554	88-22805	.FILTER ASSEMBLY, ELE L1, L2, AND L3 UOC: YNN, 86R	3	
48	PAOZZ	PAOZZ			30554	88-22762	.FILTER ASSEMBLY, ELE LO AND GND UOC: EMK, 86Q	1	
48	PAOZZ	PAOZZ			30554	88-22807	.FILTER ASSEMBLY, ELE LO AND GND UOC: YNN, 86R	1	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

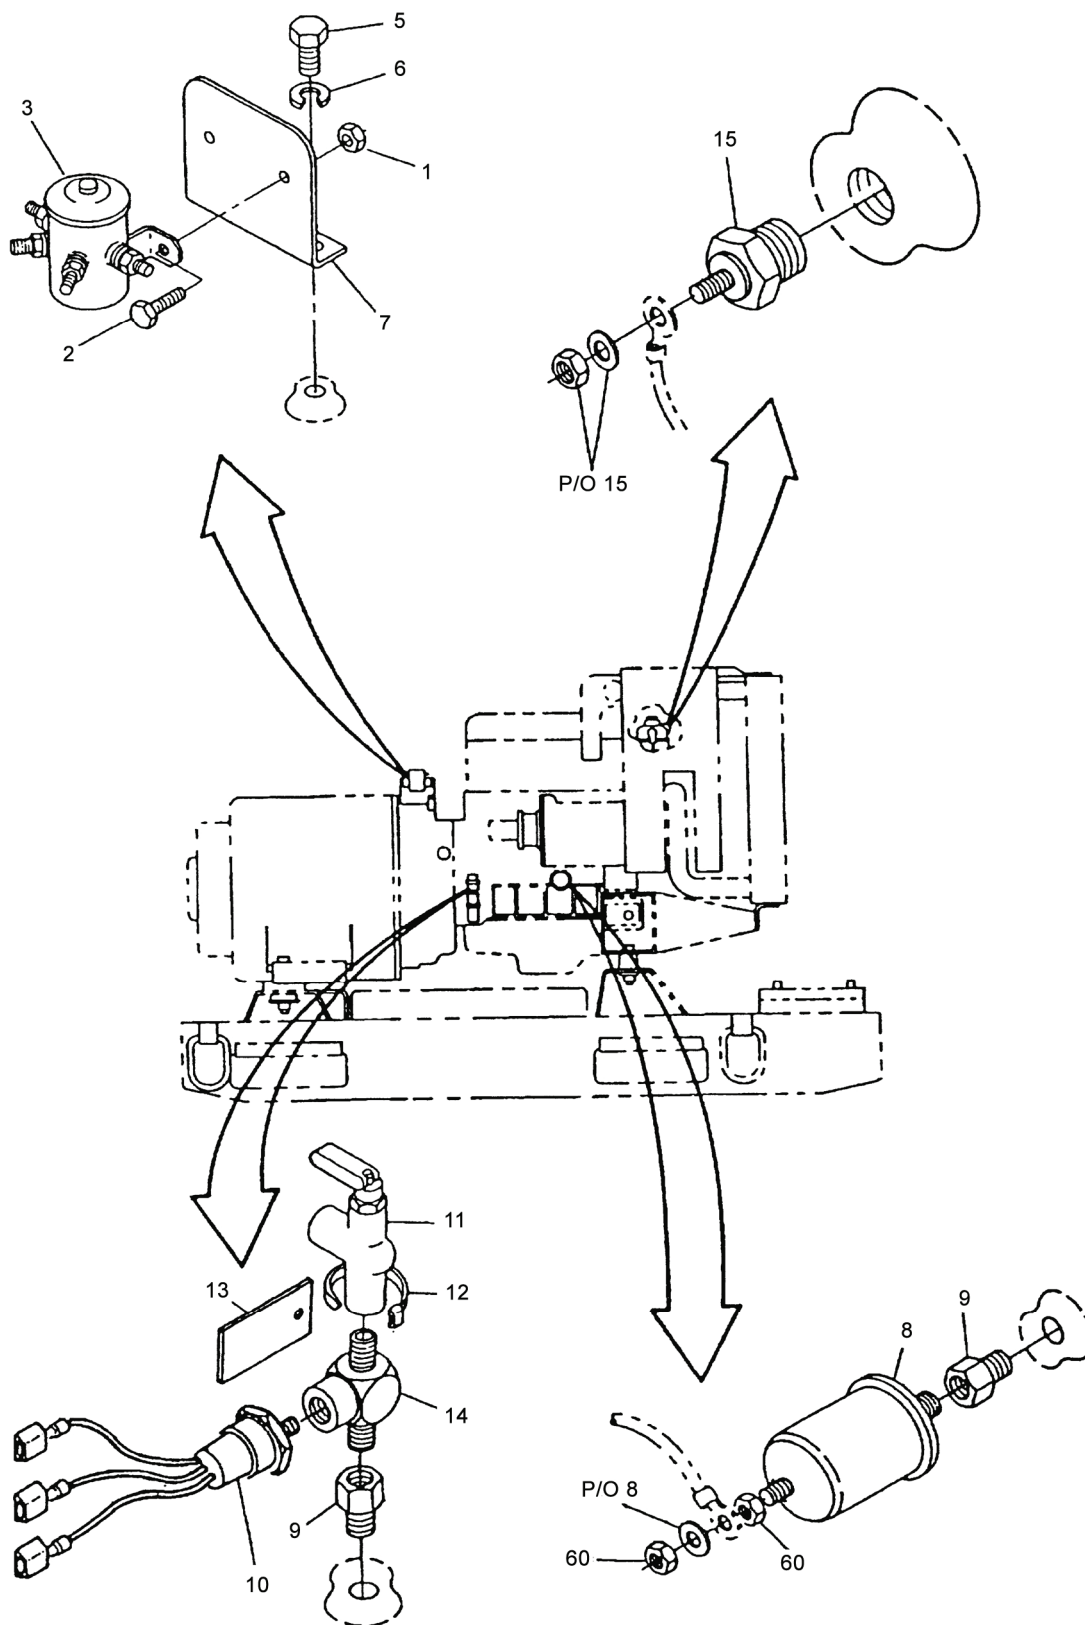


Figure 18. Engine Accessories (Sheet 1 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

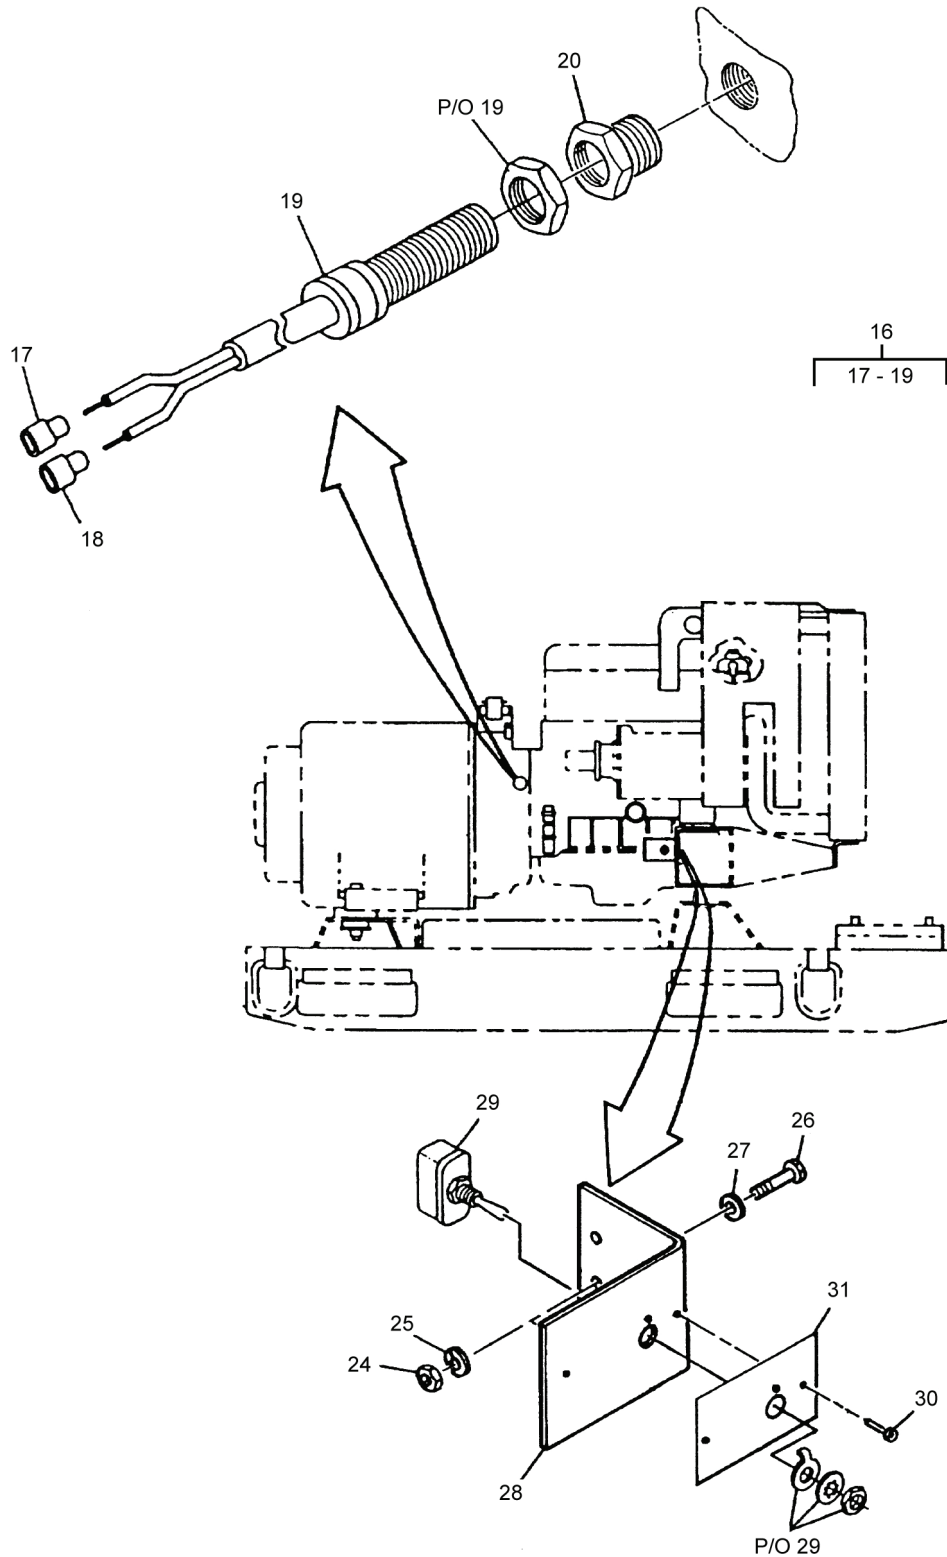


Figure 18. Engine Accessories (Sheet 2 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

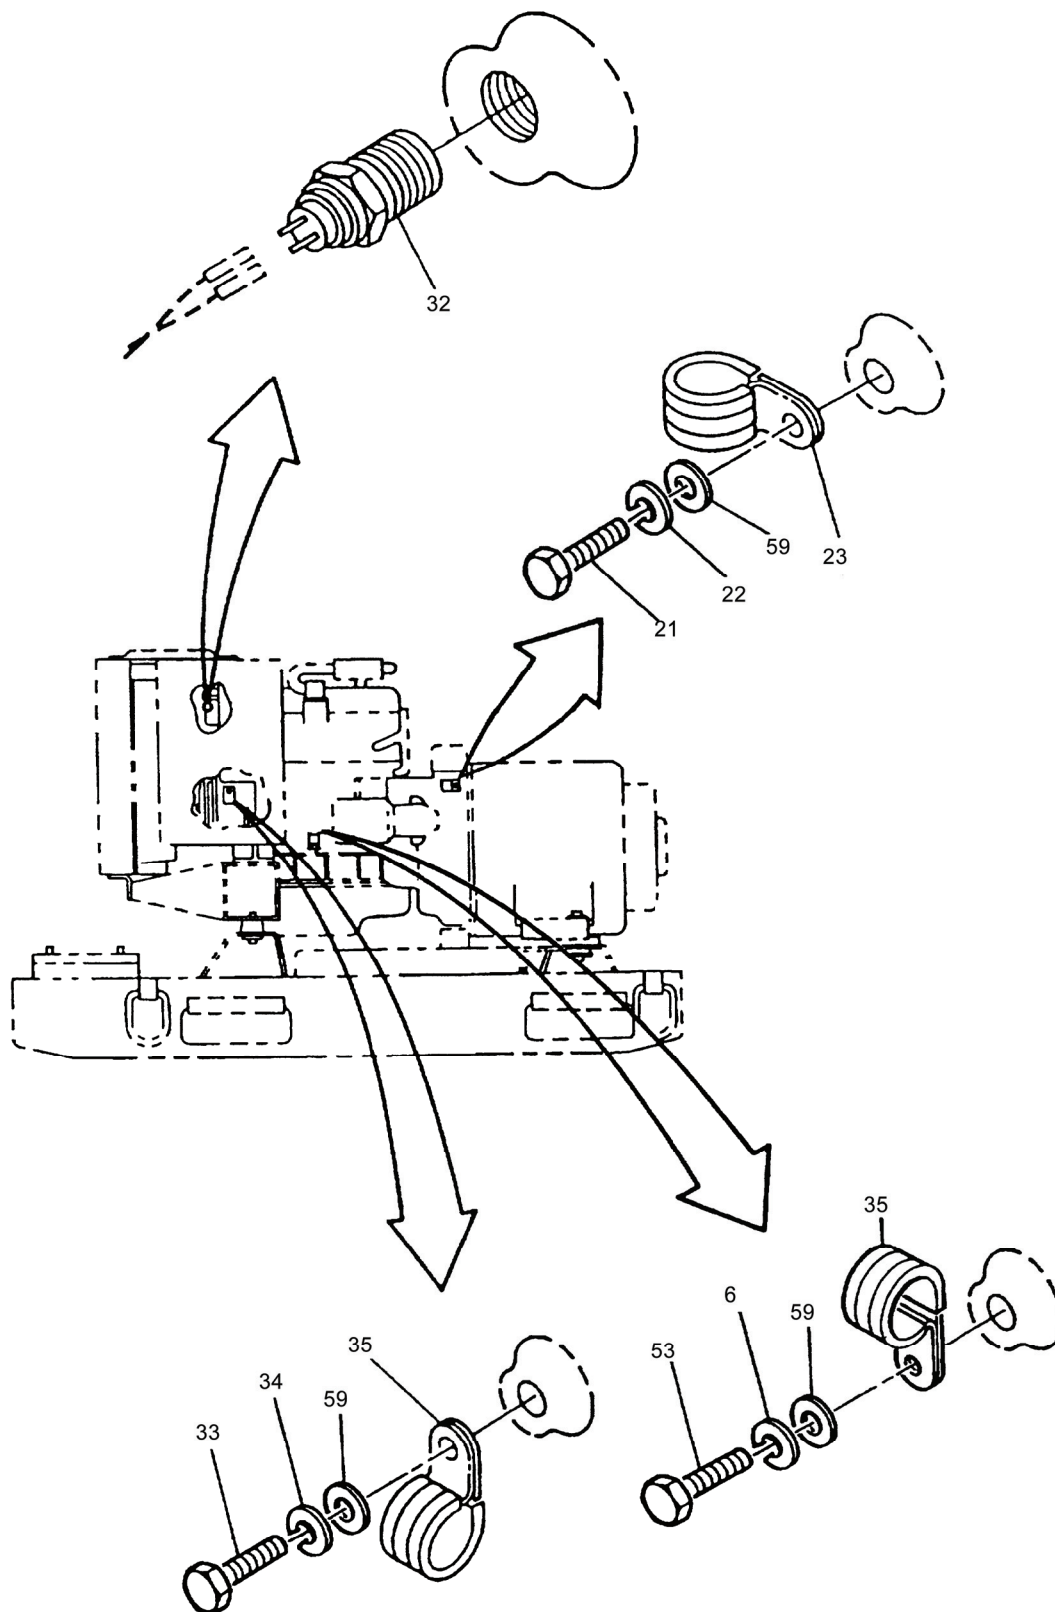


Figure 18. Engine Accessories (Sheet 3 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

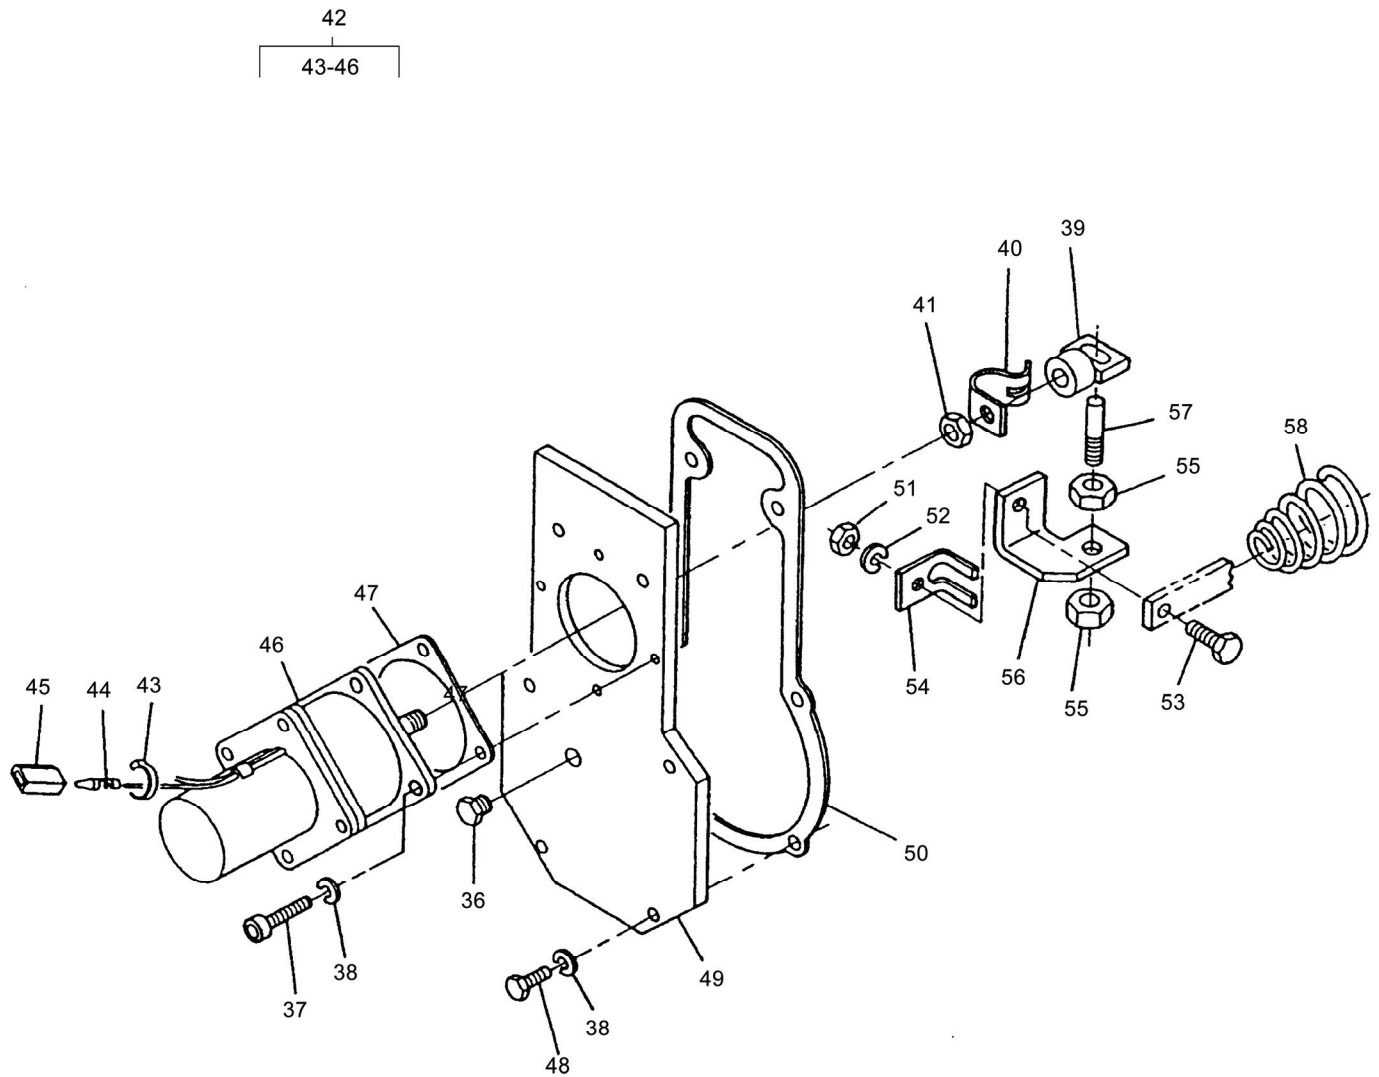


Figure 18. Engine Accessories (Sheet 4 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

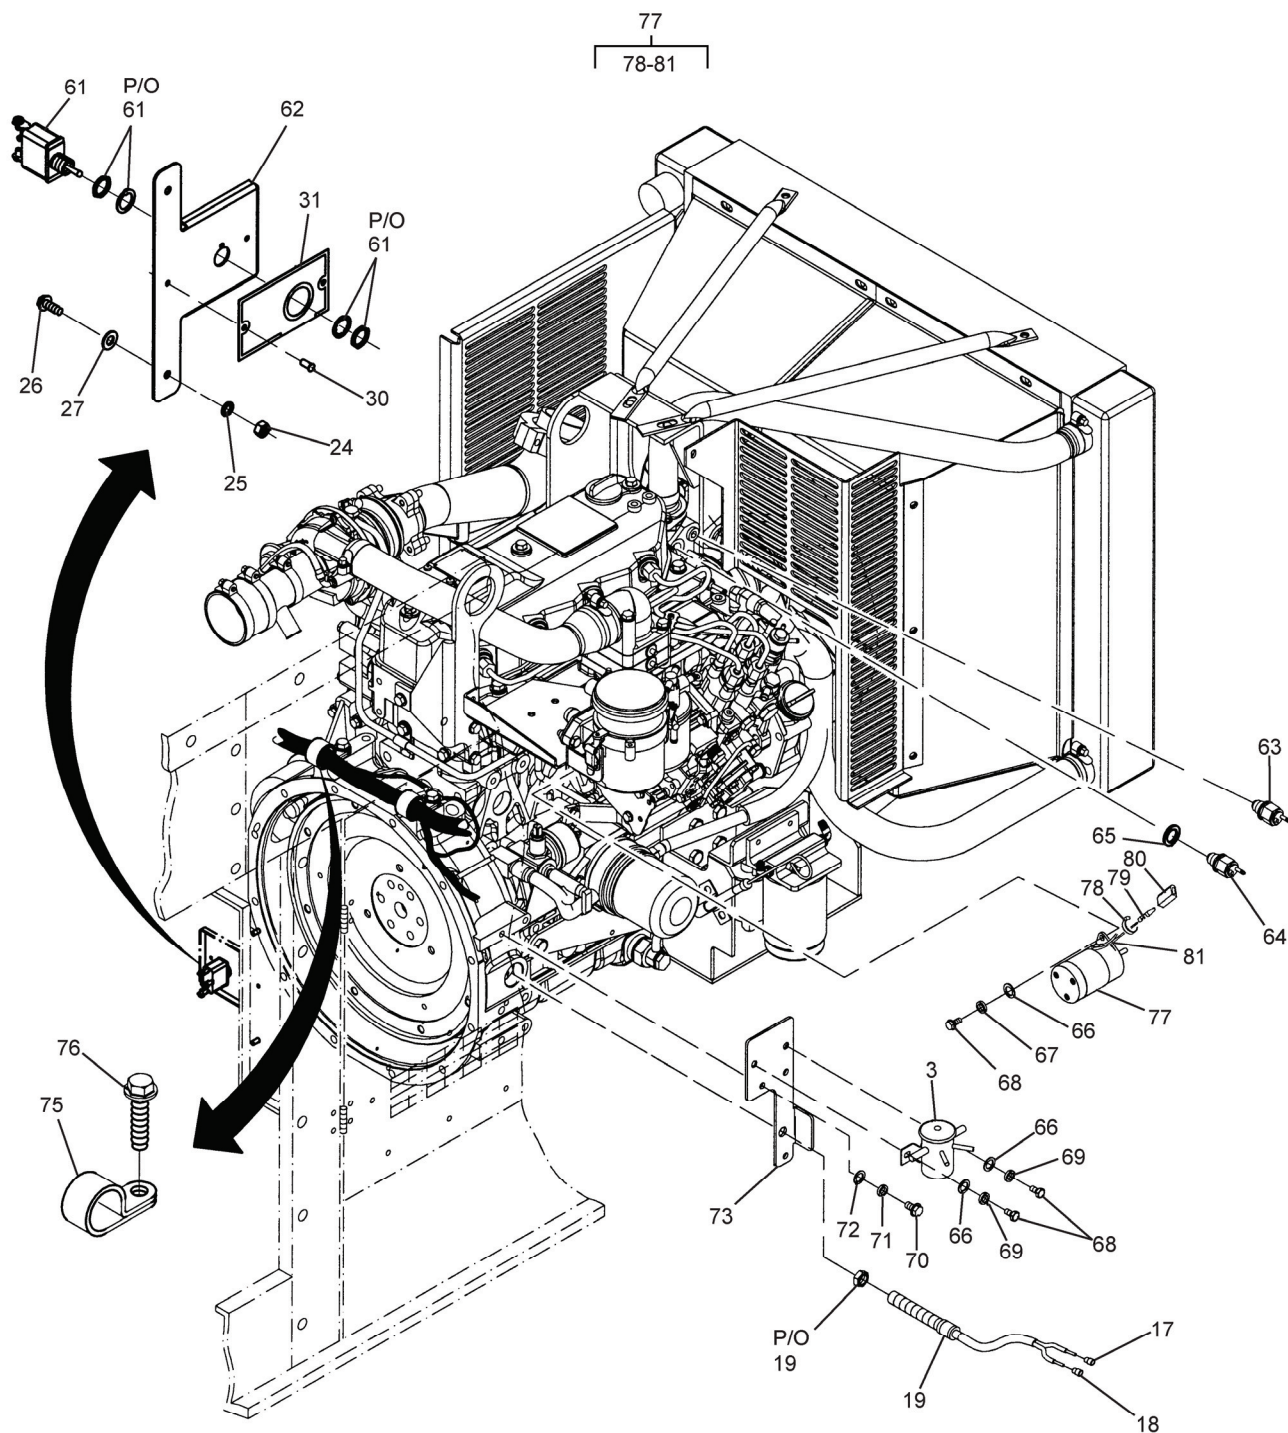


Figure 18. Engine Accessories (Sheet 5 of 5).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7)
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
							GROUP 09 - ENGINE ACCESSORIES		
							FIG. 18 ENGINE ACCESSORIES		
1	PAOZZ	PAOZZ			30554	69-561-6	.NUT, PLAIN, ASSEMBLED UOC: EMK, YNN	3	
2	PAOZZ	PAOZZ			30554	88-20260-21	.SCREW, HEX WASHERHEAD UOC: EMK, YNN	3	
3	PAOZZ	PAOZZ			30554	88-22202	.CONTACTOR, MAGNETIC	1	
4	NOT USED								
5	PAOZZ	PAOZZ			80204	B18231B100 25N	.SCREW, CAP, HEX HEAD UOC: EMK, YNN	2	
6	PAOZZ	PAOZZ			30554	88-22331-2	.WASHER, LOCK UOC: EMK, YNN	2	
7	XDOZZ	XB			30554	88-22319	.BRACKET UOC: EMK, YNN	1	
8	PAOZZ	PAOZZ			30554	88-22706	.SENDER, OIL PRESSURE	1	
9	PAOZZ	PAOZZ			30554	88-22307	.FITTING, ADAPTER	2	
10	PAOZZ	PAOZZ			30554	88-21126	.SWITCH, PRESSURE	1	
11	PAOZZ	PAOZZ			30554	88-21633	.VALVE, OIL SAMPLING	1	
12	PAOZZ	PAOZZ			96906	MS3367-1-9	.STRAP, TIEDOWN, ELECT	1	
13	MDOZZ	MDO			30554	88-22481	.PLATE, ID OIL SAMPL	1	
14	PAOZZ	PAOZZ			30554	88-21887	.FITTING, BRANCH TEE	1	
15	PAOZZ	PAOZZ			30554	88-22322	.SENDER, TEMPERATURE UOC: EMK, YNN	1	
16	AOOOO	AOO			30554	88-22550	.TRANSDUCER ASSY, MOTION	1	
17	PAOZZ	PAOZZ			30554	88-20275-1	..TERMINAL, QUICK DISC	1	
18	PAOZZ	PAOZZ			30554	88-20275-2	..TERMINAL, QUICK DISC	1	
19	PAOZZ	PAOZZ			05624	88-21061	..TRANSDUCER, MOTION	1	
20	XBOZZ	XBOZZ			30554	88-22201	.BUSHING, BRASS UOC: EMK, YNN	1	
21	PAOZZ	PAOZZ			80204	B18231B100 25N	.SCREW, CAP, HEX HEAD	1	
22	PAOZZ	PAOZZ			30554	88-22331-2	.WASHER, LOCK	1	
23	PAOZZ	PAOZZ			80205	MS21333-126	.CLAMP, LOOP	1	
24	PAOZZ	PAOZZ			96906	MS51967-2	.NUT, PLAIN, HEX	2	
25	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK	2	
26	PAOZZ	PAOZZ			30554	88-20260-33	.BOLT, MACHINE	2	
27	PAOZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT	2	
28	XDOZZ	XB			30554	88-22320	.BRACKET, DEAD CRANK UOC: EMK, YNN	1	
29	PAOZZ	PAOZZ			30554	88-21081	.SWITCH, TOGGLE UOC: EMK, YNN	1	
30	PAOZZ	PAOZZ			97403	13214E3789-2	.RIVET, BLIND	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
31	MDOZZ	MDO			30554	88-21776	.PLATE, DEAD CRANK	1	
32	PAOZZ	PAOZZ			30554	88-22317	.SWITCH, THERMOSTATIC UOC: EMK, YNN	1	
33	XDOZZ	XB			80204	B18231B1 0016N	.SCREW, CAP, HEX HEAD	3	
34	PAOZZ	PAOZZ			30554	88-22331-2	.WASHER, LOCK	2	
35	PAOZZ	PAOZZ			80205	MS21333-117	.CLAMP, LOOP	1	
36	PAOZZ	PAOZZ			81343	2-130109E	.PLUG, PIPE	1	
37	PAOZZ	PAOZZ			80204	B1831BH06 0014	.SCREW, CAP, SOCKET HEAD	4	
38	PAFZZ	PAOZZ			30554	88-22331-3	.WASHER, LOCK	10	
39	PBFZZ	PBOZZ			30554	88-22623	.CLEVIS, ROD END	1	
40	PBFZZ	PBOZZ			30554	88-22784	.CLIP, SPRING TENSION	1	
41	PAFZZ	PAOZZ			80204	B18241A060	.NUT, PLAIN, HEX	1	
42	AFFFF	AOO			30554	88-22545	.ACTUATOR ASSY UOC: EMK, YNN	1	
43	PAFZZ	PAOZZ			96906	MS3367-1-9	..STRAP, TIEDOWN, ELECT UOC: EMK, YNN	1	
44	PAOZZ	PAOZZ			30554	88-20476	..CONTACT, ELECTRICAL UOC: EMK, YNN	2	
45	PAOZA	PAOZA			30554	88-20471	..CONNECTOR, PLUG, ELEC UOC: EMK, YNN	1	
46	PAFZZ	PAOZZ			30554	88-22428	..ACTUATOR, ELECTRO-ME UOC: EMK, YNN	1	
47	PAOZZ	PAOZZ			30554	88-22618	.GASKET	1	
48	PAOZZ	PAOZZ			80204	B18231B6 020N	.SCREW, CAP, SOCKET HE	6	
49	XDFZZ	XB			30554	88-22617	.PLATE, INTERFACE	1	
50	PAOZZ	PAOZZ			30554	88-22416	.GASKET	1	
51	PAFZZ	PAOZZ			80204	B18241B050	.NUT, PLAIN HEX	1	
52	PAFZZ	PAOZZ			30554	88-22331-4	.WASHER, LOCK	1	
53	PAFZZ	PAOZZ			80204	B18231B5016N	.SCREW, CAP, HEX HEAD	1	
54	PAFZZ	PAOZZ			30554	88-22619	.BRACKET, ANGLE	1	
55	PAFZZ	PAOZZ			30554	95-8125-4	.NUT, PLAIN, HEX	2	
56	XDFZZ	XB			30554	88-22621	.ADAPTER, RACK	1	
57	PBFZZ	PBOZZ			30554	88-22620	.PIN, STRAIGHT, THREAD	1	
58	PBFZZ	PBOZZ			30554	88-22624	.SPRING, HELICAL, COMP	1	
59	PAOZZ	PAOZZ			96906	MS51412-7	.WASHER, FLAT UOC: EMK	3	
60	PAFZZ	PAOZZ			80205	MS35650-103	.NUT, PLAIN, HEX	2	
61	PAOZZ				30554	88-21081 CRANK	.SWITCH, TOGGLE, DEAD UOC: 86Q, 86R	1	
62	XBOZZ				30554	97-24045 SWITCH	.BRACKET, DEAD CRANK UOC: 86Q, 86R	1	
63	PAOZZ				30554	97-24061	.SWITCH, THERMOSTATIC UOC: 86Q, 86R	1	
64	PAOZZ				30554	88-22322	.SENDER, TEMPERATURE UOC: 86Q, 86R	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
65	PAOZZ				30554	97-24118	.WASHER, COPPER UOC: 86Q, 86R	1	
66	PAOZZ				30554	88-20033-22A	.WASHER, FLAT UOC: 86Q, 86R	4	
67	PAOZZ				30554	88-22331-3	.WASHER, LOCK UOC: 86Q, 86R	3	
68	PAOZZ				81343	B1831BH0 60016	.SCREW UOC: 86Q, 86R	4	
69	PAOZZ				30554	88-22792-2	.WASHER, LOCK UOC: 86Q, 86R	1	
70	PAOZZ				80204	B18231A 10025N	.BOLT, MACHINE UOC: 86Q, 86R	2	
71	PAOZZ				30554	88-22331-1	.WASHER, LOCK UOC: 86Q, 86R	2	
72	PAOZZ				30554	88-20033-24A	.WASHER, FLAT UOC: 86Q, 86R	2	
73	XBFZZ				30554	97-24017	.BRACKET ASSEMBLY UOC: 86Q, 86R	1	
74	NOT USED								
75	PAOZZ				30554	88-20554-1	.CLAMP, LOOP UOC: 86Q, 86R	2	
76	PAOZZ				80204	B18231A100 20N	.SCREW, CAP, SOCKET HEAD UOC: 86Q, 86R	2	
77	AFFFF	AOO			30554	97-24114	.ACTUATOR ASSY UOC: 86Q, 86R	1	
78	PAFZZ	PAOZZ			96906	MS3367-1-9	..STRAP, TIEDOWN, ELECT UOC: 86Q, 86R	1	
79	PAOZZ	PAOZZ			30554	88-20476	..CONTACT, ELECTRICAL UOC: 86Q, 86R	2	
80	PAOZA	PAOZA			27264	88-20471	..CONNECTOR, PLUG, ELEC UOC: 86Q, 86R	1	
81	PAFZZ				30554	97-24018	..ACTUATOR, GOVERNOR UOC: 86Q, 86R	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

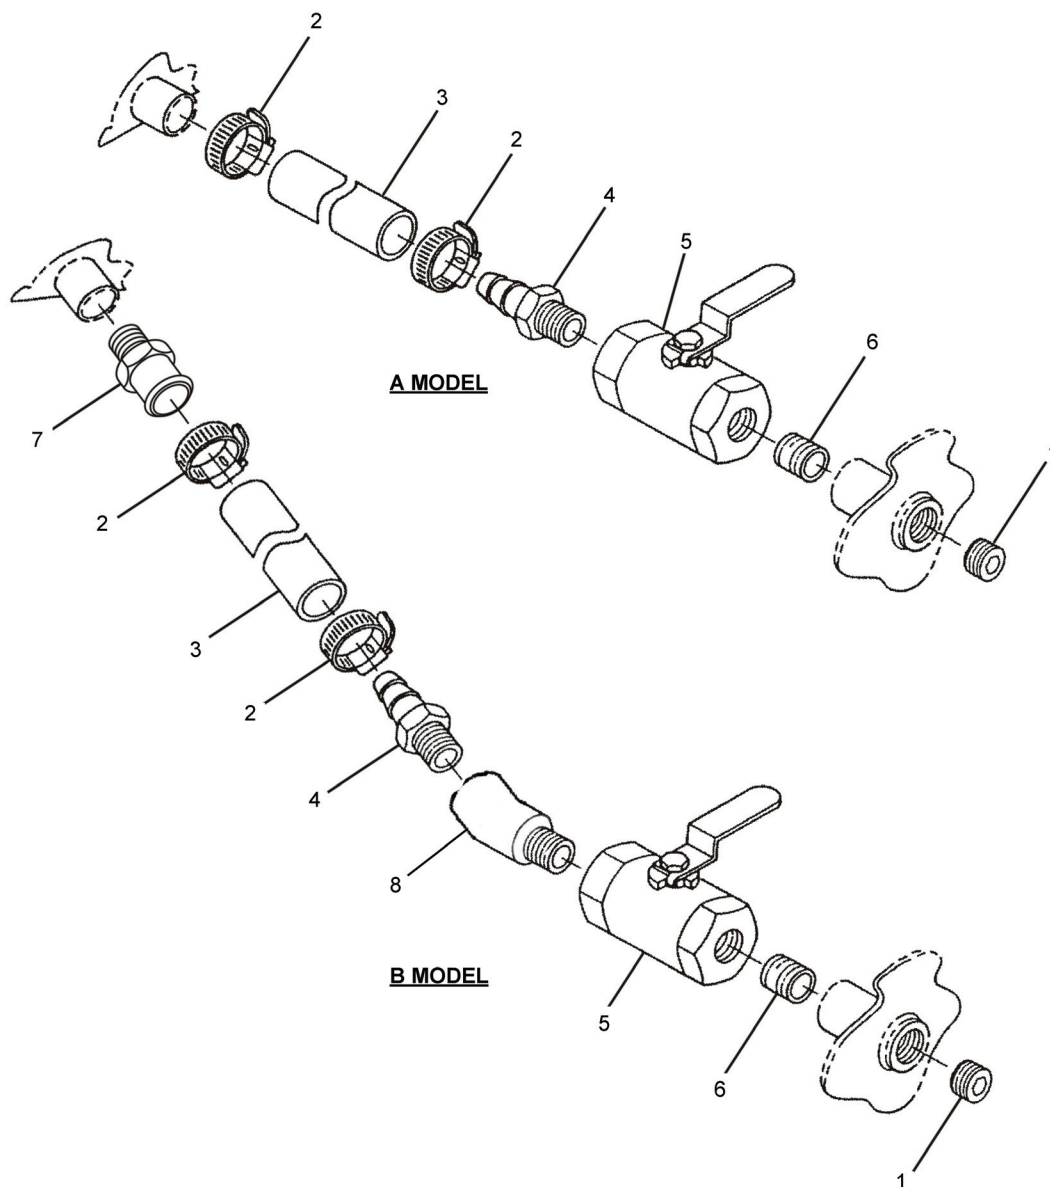


Figure 19. Oil Drain Line.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7) USMC QTY PER EQUIP
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	
							GROUP 10 - LUBRICATION SYSTEM		
							FIG. 19 OIL DRAIN LINE		
1	PAOZZ	PAOZZ			30554	12 130109G	.PLUG, PIPE	1	
2	PAOZZ	PAOZZ			30554	88-20561-2	.CLAMP, HOSE	2	
3	MOOZZ	MOO			30554	88-21604-110	.HOSE, OIL DRAIN MAKE FROM P/N 100R1A-16 (81349), 24 INCHES REQUIRED UOC: EMK	1	
3	MOOZZ	MOO			30554	97-24604-110	..HOSE, OIL DRAIN MAKE FROM P/N 100R1AT-16 (81349), 24 INCHES REQUIRED UOC: 86Q	1	
3	MOOZZ	MOO			30554	88-21605-110	.HOSE, OIL DRAIN MAKE FROM P/N 100R1A-16 (81349), 24 INCHES REQUIRED UOC: YNN	1	
3	MOOZZ	MOO			30554	97-24605-110	..HOSE, OIL DRAIN MAKE FROM P/N 100R1AT-16 (81349), 24 INCHES REQUIRED UOC: 86R	1	
4	PAOZZ	PAOZZ			30554	88-21755-3	.ADAPTER, STRAIGHT, PI	1	
5	PAOZZ	PAOZZ			30554	88-21891	.VALVE, BALL	1	
6	PAOZZ	PAOZZ			30554	72-5304	.NIPPLE, PIPE	1	
7	PAOZZ				30554	97-24011	.FITTING, OIL DRAIN UOC: 86Q, 86R	1	
8	PAOZZ				81343	12-12 1403 39C	.ELBOW 45' ST ¾ NPTX ¾ FEMALE NPT SAE J 516 UOC: 86Q, 86R	1	
							END OF FIGURE		

SECTION II. REPAIR PARTS LIST (CONTINUED)

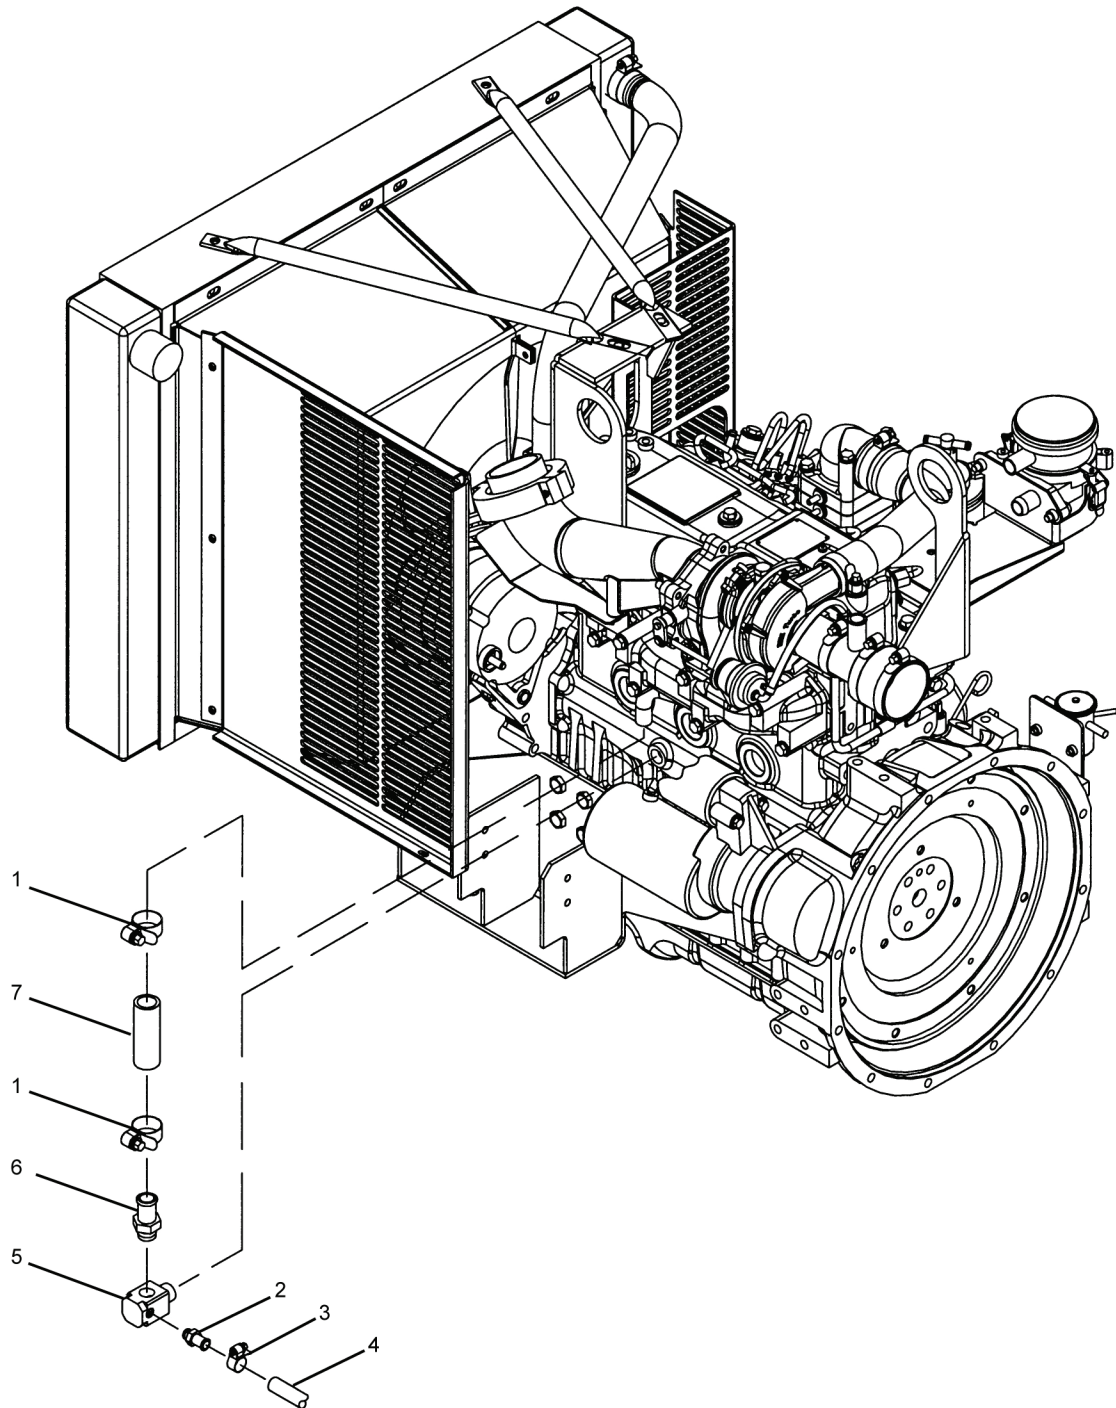


Figure 19.1. Lubrication Accessories (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

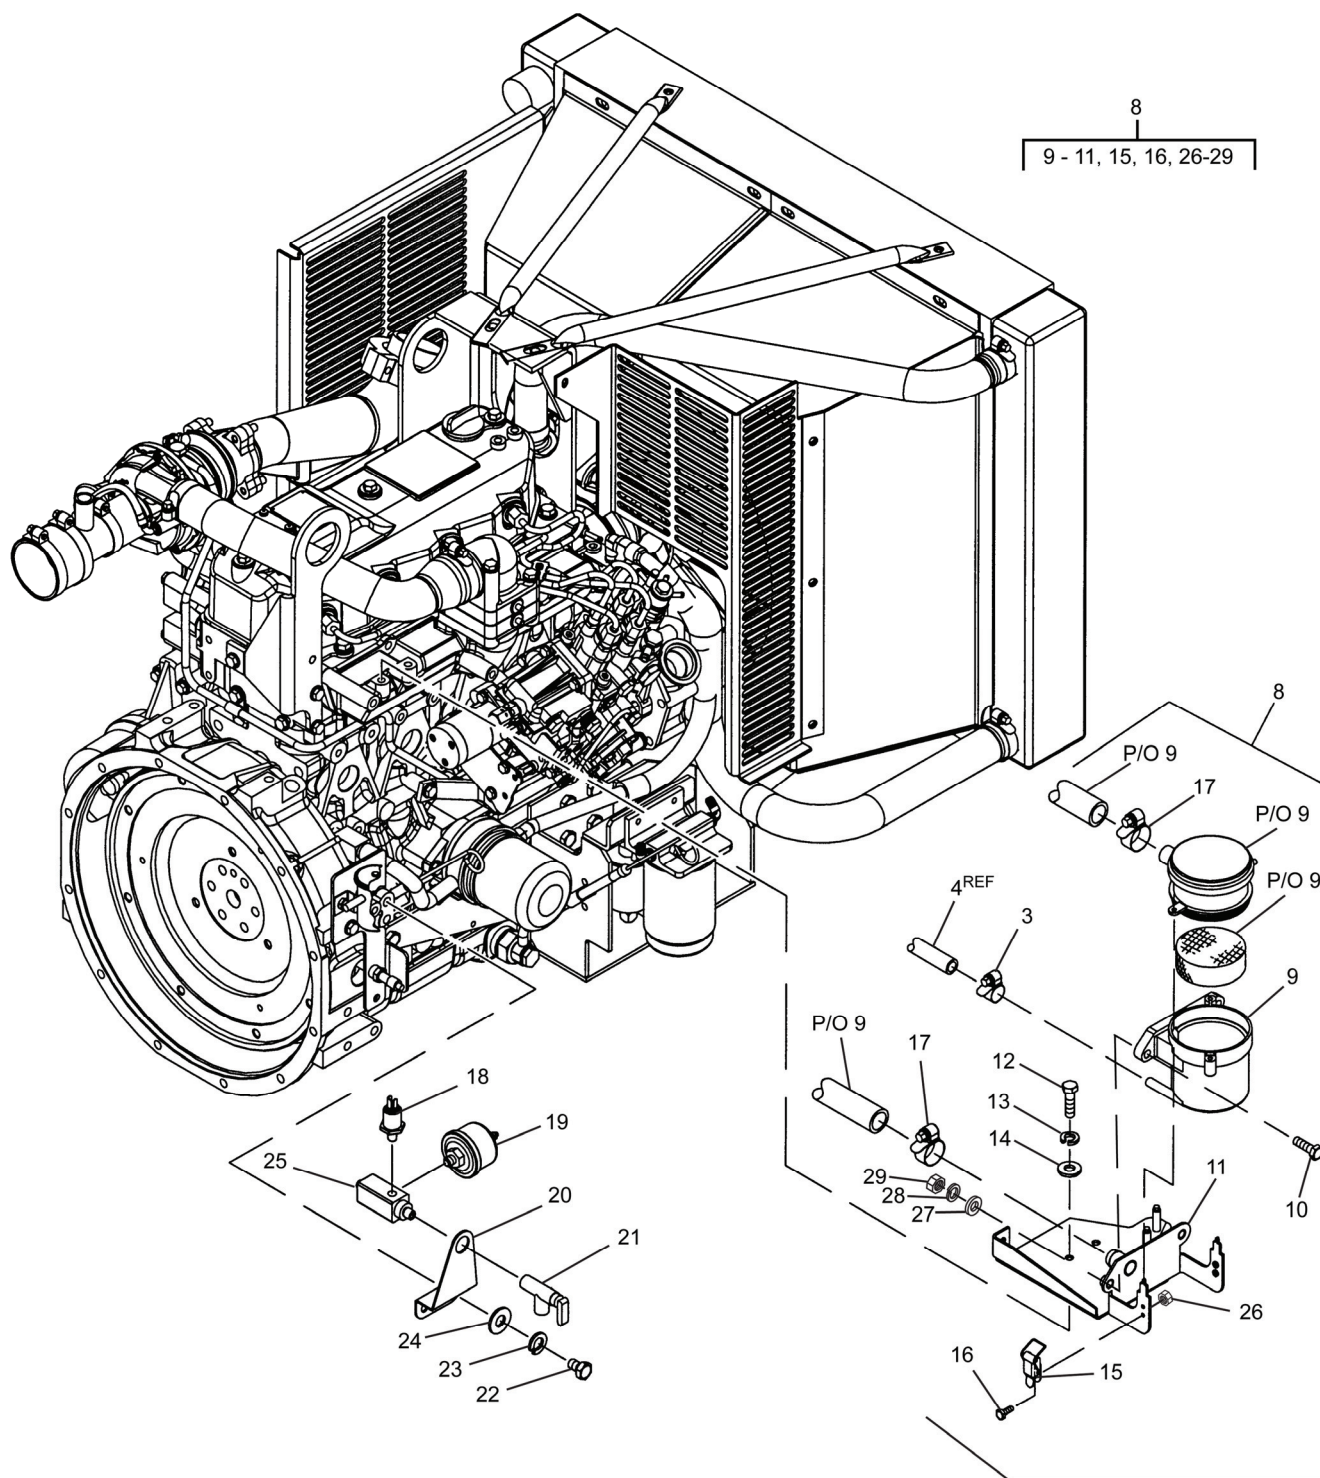


Figure 19.1. Lubrication Accessories (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
							GROUP 10 - LUBRICATION SYSTEM		
							FIG. 19.1 LUBRICATION ACCESSORIES		
1	PAOZZ				30554	88-20561-2	.CLAMP, HOSE UOC: 86Q, 86R	2	
2	PAOZZ				81343	8-4 430160C	.ADAPTER, STRAIGHT UOC: 86Q, 86R	2	
3	PAOZZ				30554	88-20561-1	.CLAMP, HOSE UOC: 86Q, 86R	2	
4	MOO				30554	97-24604-282	.HOSE, NONMETALLIC, MAKE FROM P/N 88-20579-6 (30554), 27 INCHES REQUIRED UOC: 86Q	1	
4	MOO				30554	97-24605-282	.HOSE, NONMETALLIC, MAKE FROM P/N 88-20579-6 (30554), 27 INCHES REQUIRED UOC: 86R	1	
5	PAOZZ				30554	97-24031	.FITTING, TEE, OIL DRAIN UOC: 86Q, 86R	1	
6	PAOZZ				30554	97-24113	.CONNECTOR UOC: 86Q, 86R	1	
7	MOO				30554	97-24604-112	.HOSE, NONMETALLIC, MAKE FROM P/N 88-20579-7 (30554), 2.75 INCHES REQUIRED UOC: 86Q	1	
7	MOO				30554	97-24605-112	.HOSE, NONMETALLIC, MAKE FROM P/N 88-20579-7 (30554), 2.75 INCHES REQUIRED UOC: 86Q	1	
8	XBOOO				30554	97-24002	.FILTER ASSEMBLY, CRANKCASE VENTILATION UOC: 86Q, 86R	1	
9	PAOZZ				30554	97-24025	..FILTER, CRANKCASE VENTILATION UOC: 86Q, 86R	1	
10	PAOZZ				80204	B1821BH031 C100N	..SCREW, HEX HEAD UOC: 86Q, 86R	2	
11	XBOOO				30554	97-24024	..BRACKET ASSEMBLY, FILTER UOC: 86Q, 86R	1	
12	PAOZZ				80204	B18231A1025N	.BOLT, MACHINE UOC: 86Q, 86R	2	
13	PAOZZ				30554	88-22331-1	.WASHER, LOCK UOC: 86Q, 86R	2	
14	PAOZZ				30554	88-20033-24A	.WASHER, FLAT UOC: 86Q, 86R	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
15	PAOZZ				30554	97-24026	..LATCH, TOGGLE UOC: 86Q, 86R	2	
16	PAOZZ				30554	69-662-20	..SCREW, HEX HEAD UOC: 86Q, 86R	4	
17	PAOZZ				30554	88-20561-3	.CLAMP, HOSE UOC: 86Q, 86R	4	
18	PAOZZ				30554	88-21126	.SWITCH, PRESSURE UOC: 86Q, 86R	1	
19	PAOZZ				30554	88-22706	.SENSOR, OIL PRESSURE UOC: 86Q, 86R	1	
20	XBOOO				30554	97-24016	.BRACKET, MANIFOLD UOC: 86Q, 86R	1	
21	PAOZZ				30554	88-21633	.VALVE, OIL SAMPLING UOC: 86Q, 86R	1	
22	PAOZZ				30554	B18231A 100020N	.BOLT, MACHINE UOC: 86Q, 86R	2	
23	PAOZZ				30554	88-22331-2	.WASHER, LOCK UOC: 86Q, 86R		
24	PAOZZ				30554	88-20033-31A	.WASHER, FLAT UOC: 86Q, 86R	2	
25	PAOZZ				30554	97-24015	.MANIFOLD, OIL PRESSURE UOC: 86Q, 86R	1	
26	PAOZZ				30554	69-561-2	..NUT, CAGE UOC: 86Q, 86R	4	
27	PAOZZ				30554	88-20564-3	..WASHER, FLAT UOC: 86Q, 86R	2	
28	PAOZZ				30554	88-20556-6	..WASHER, LOCK UOC: 86Q, 86R	2	
29	PAOZZ				30554	88-22790-2	..NUT UOC: 86Q, 86R	2	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

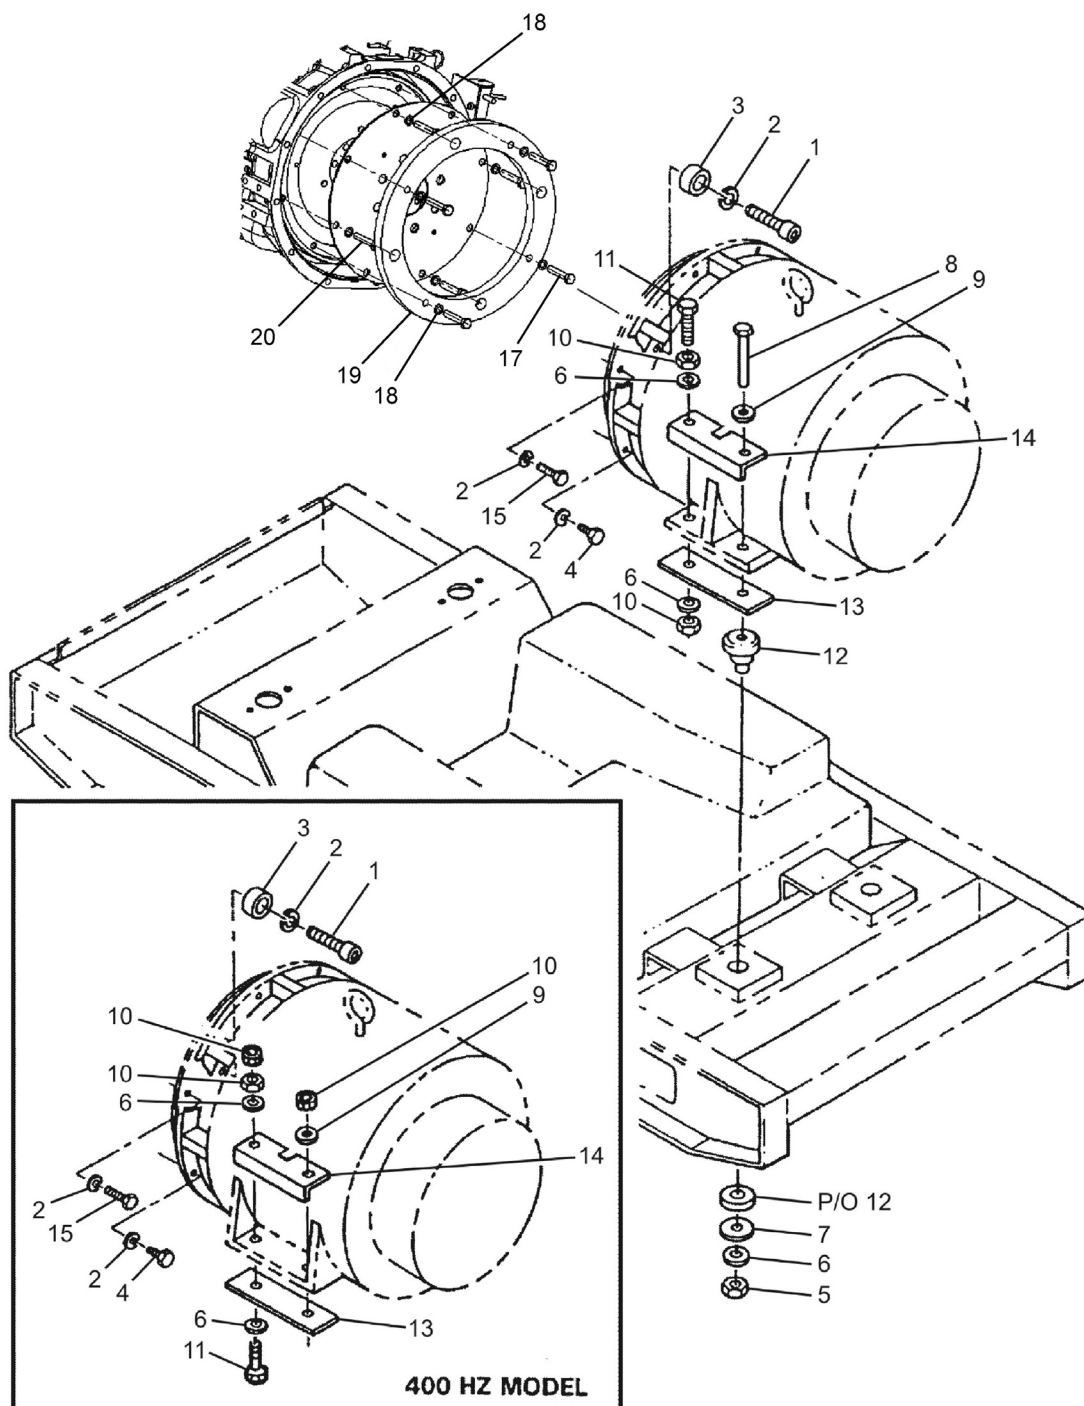


Figure 20. Generator Installation.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7)
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
							GROUP 11 - GENERATOR ASSEMBLY		
							FIG. 20 GENERATOR INSTALLATION		
1	PAFZZ	PAOZZ			96906	MS16998-75	.SCREW, CAP, SOCKET HEAD	2	
2	PAFZZ	PAOZZ			80205	MS35338-65	.WASHER, LOCK	22	
3	PAFZZ	PAOZZ			30554	88-22339	.SPACER, SLEEVE	2	
4	PAFZZ	PAOZZ			80204	B1821BH038 C125N	.SCREW, CAP, HEX HEAD	12	
5	PAFZZ	PAOZZ			96906	MS51943-13	.NUT, SELF-LOCKING, HEX	2	
6	PAFZZ	PAOZZ			96906	MS51412-11	.WASHER, FLAT	6	
7	PAFZZ	PAOZZ			30554	88-20247-3	.WASHER, FLAT	2	
8	PAFZZ	PAOZZ			80204	B1821BH063C 475N	.SCREW, CAP, HEX HEAD	2	
9	PBFZZ	PBOZZ			92830	B1875-127	.WASHER, BEVEL	2	
10	PAFZZ	PAOZZ			96906	MS51971-7	.NUT, PLAIN, HEX	4	
11	PAFZZ	PAOZZ			30554	88-22530	.SCREW, CAP, HEX HEAD	2	
12	PBFZZ	PBOZZ			81860	RB-X85	.MOUNT, RESILIENT	2	
13	XDFZZ	XB			30554	88-22524	.PLATE, GENERATOR MO	2	
14	XDFZZ	XB			30554	88-22525	.ANGLE, GENERATOR	2	
15	PAFZZ	PAOZZ			80204	B1821BH038 C100N	.SCREW, CAP, HEX HEAD	8	
16	NOT USED								
17	PAFZZ	PAOZZ			30554	97-24116-5	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	4	
18	PAFZZ	PAOZZ			30554	88-22331-2	.WASHER, LOCK UOC: 86Q, 86R	8	
19	PAFZZ	PAOZZ			30554	97-24122	.RING, INERTIA UOC: 86Q, 86R	1	
20	PAFZZ	PAFZZ			30554	97-24116-4	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	4	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

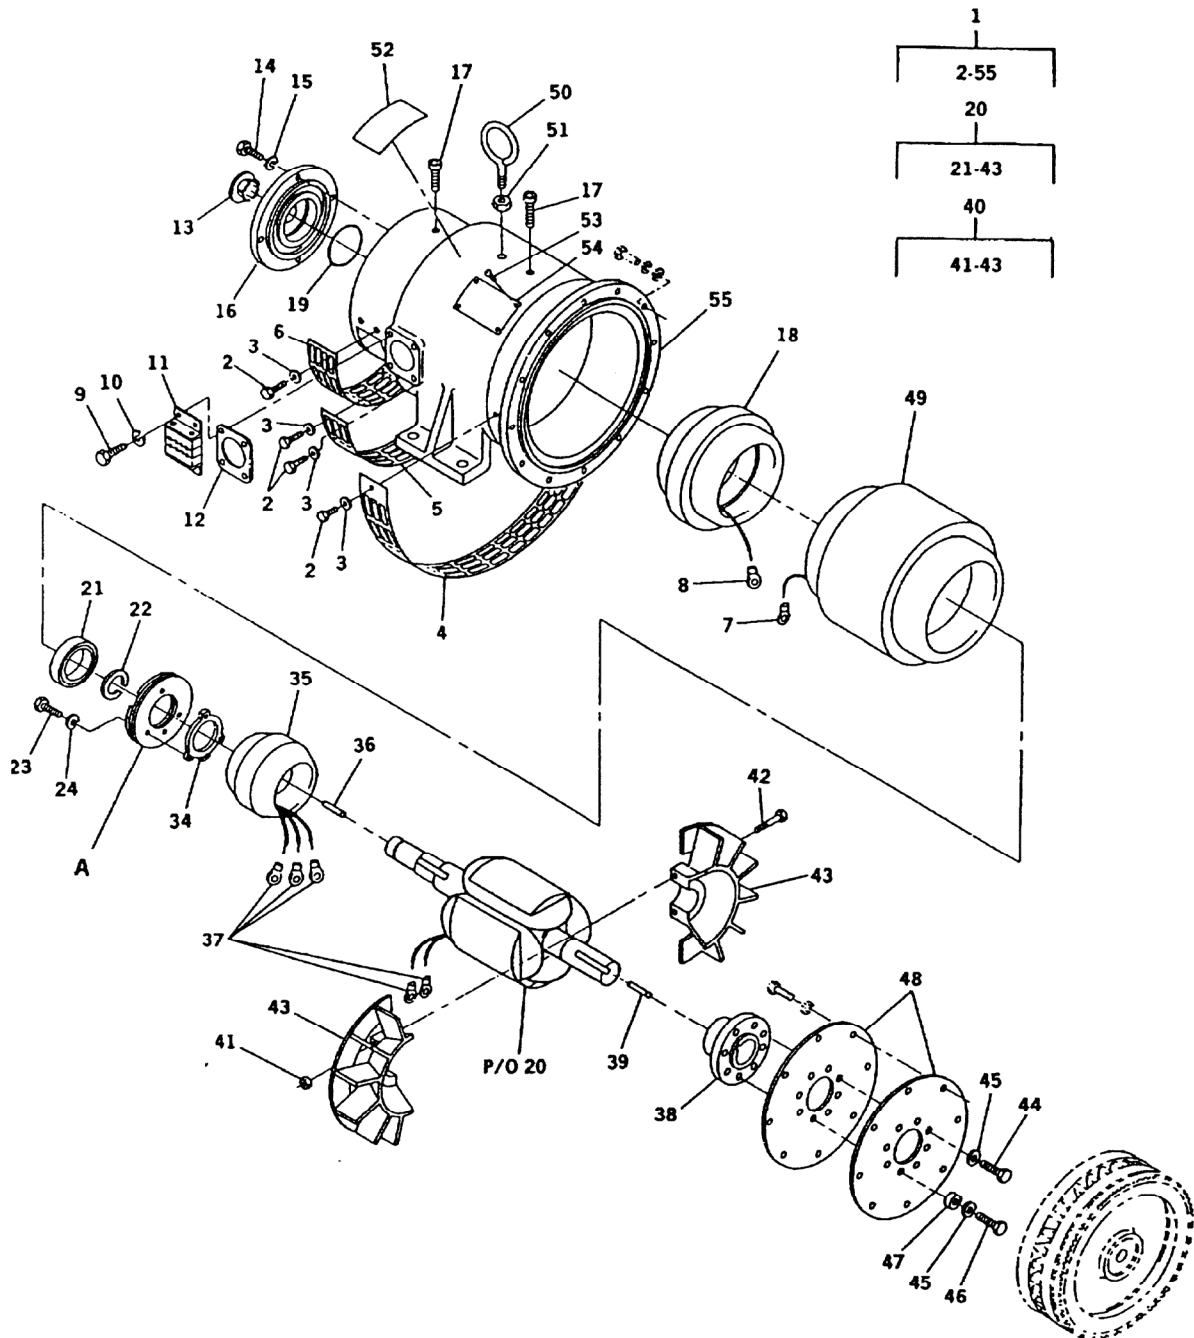


Figure 21. Generator Assembly, 50/60 Hz (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

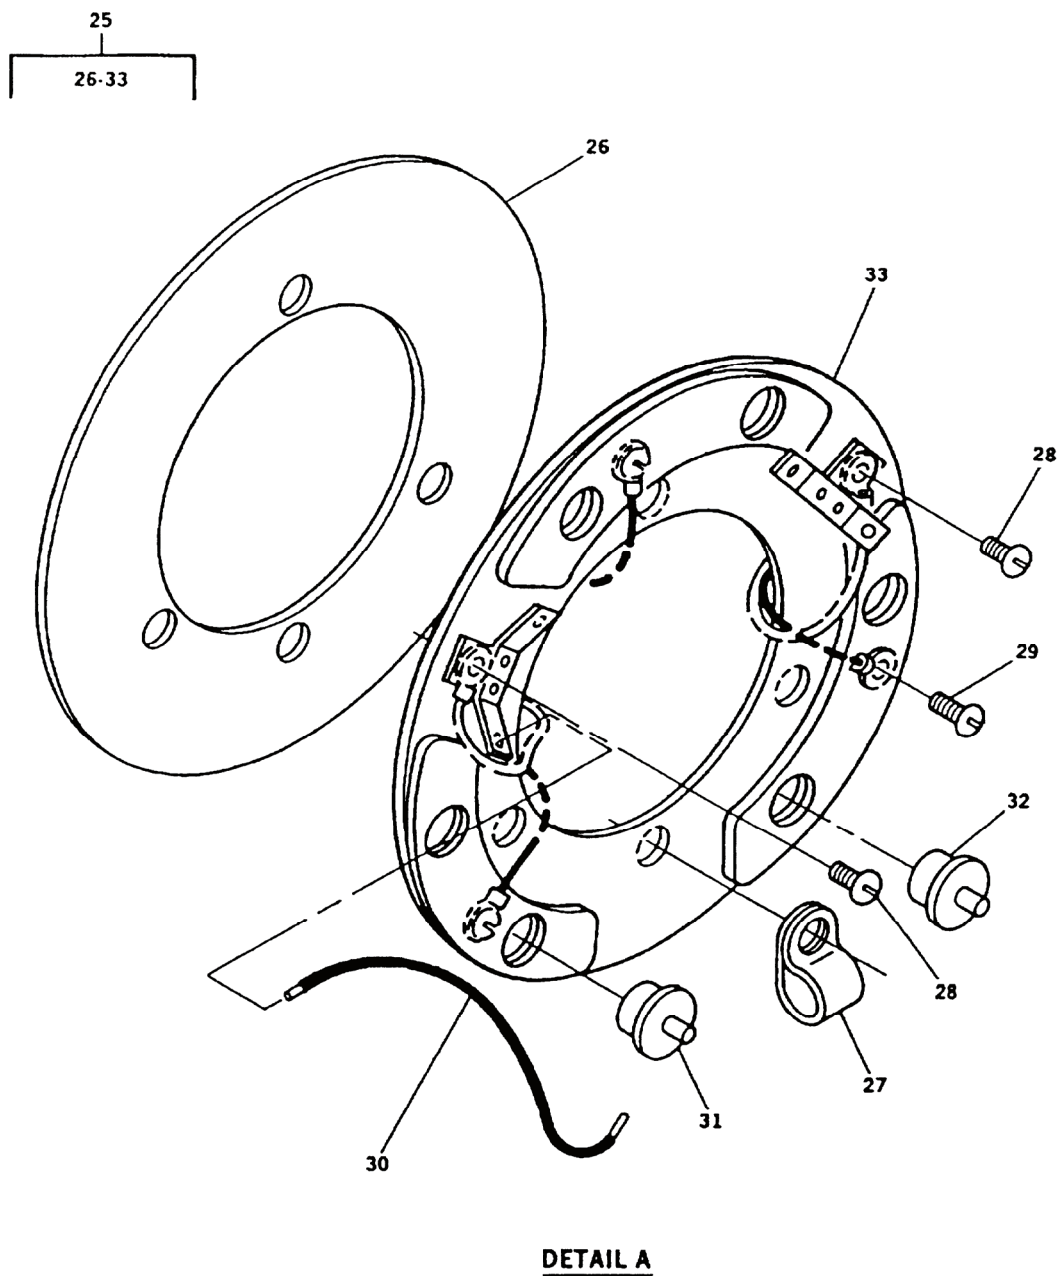


Figure 21. Generator Assembly, 50/60 Hz (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
							GROUP 11 - GENERATOR ASSEMBLY		
							FIG. 21 GENERATOR ASSEMBLY, 50/60 HZ		
1	PBFFH	PBFFH			30554	88-21005	.GENERATOR, ALTERNATING CURRENT, 60 HZ UOC: EMK, 86Q	1	
2	PAFZZ	PAOZZ			96906	MS90725-3	..SCREW, CAP, HEX HEAD UOC: EMK, 86Q	10	
3	XDFZZ	XB			96906	MS51943-13	..WASHER, FLAT UOC: EMK, 86Q	10	
4	XDFZZ	XB			36156	720346-0C	..COVER, BAND UOC: EMK, 86Q	1	
5	XDFZZ	XB			36156	720345-03	..SCREEN, INTAKE UOC: EMK, 86Q	1	
6	XDFZZ	XB			36156	720344-03	..SCREEN, INTAKE UOC: EMK, 86Q	1	
7	PAFZZ	PAOZZ			96906	MS20659-128	..TERMINAL, LUG USED ON STATOR LEADS UOC: EMK, 86Q	10	
8	PAFZZ	PAOZZ			96906	MS20659-165	..TERMINAL, LUG USED ON EXCITER LEADS UOC: EMK, 86Q	2	
9	PAFZZ	PAOZZ			80205	MS90725-6	..SCREW, CAP, HEX HEAD UOC: EMK, 86Q	4	
10	PAOZZ	PAOZZ			80205	MS35338-63	..WASHER, LOCK UOC: EMK, 86Q	4	
11	XDFZZ	XB			36156	752818-0A	..LEAD CLAMP ASSEMBLY UOC: EMK, 86Q	1	
12	XDFZZ	XB			36156	834822-01	..GASKET, LEAD CLAMP UOC: EMK, 86Q	1	
13	PAFZZ	PAOZZ			36156	846833-01	..PLUG, PROTECTIVE DUS UOC: EMK, 86Q	1	
14	PAFZZ	PAOZZ			80205	MS90725-34	..SCREW, CAP, HEX HEAD UOC: EMK, 86Q	4	
15	PAFZZ	PAOZZ			96906	MS35338-64	..WASHER, LOCK UOC: EMK, 86Q	4	
16	XDFZZ	XB			36156	703320-02	..ENDBELL UOC: EMK, 86Q	1	
17	PAFZA	PAFZA			88044	AN565C416-12	..SETSCREW UOC: EMK, 86Q	2	
18	XDFZZ	XB			36156	789295-0A	..STATOR CORE, EXCITE UOC: EMK, 86Q	1	
19	PAFZZ	PAOZZ			36156	865876-01	..O-RING UOC: EMK, 86Q	1	
20	XDFFF	XB			36156	777070-0A	..ROTOR ASSY 60 HZ UOC: EMK, 86Q	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
21	PAFZZ	PAOZZ			52676	6308-2RSJEM	...BEARING, BALL, ANNULA UOC: EMK, 86Q	1	
22	XDFZZ	XB			96906	MS16624-1156	...RING, RETAINING UOC: EMK, 86Q	1	
23	PAFZZ	PAOZZ			36156	801016-06	...SCREW, CAP, HEX HEAD UOC: EMK, 86Q	3	
24	PAFZZ	PAOZZ			80205	MS35333-39	...WASHER, LOCK UOC: EMK, 86Q	3	
25	PAFZZ	PAOZZ			36156	777079-0A	...SEMICONDUCTOR DEVICE UOC: EMK, 86Q	1	
26	XDFZZ	XB			36156	718810	...PLATE, RECTIFIER INSULATING UOC: EMK, 86Q	1	
27	PAFZZ	PAOZZ			96906	MS25281-4	...CLAMP, LOOP UOC: EMK, 86Q	1	
28	PAFZZ	PAOZZ			80205	MS35206-241	...SCREW, MACHINE UOC: EMK, 86Q	3	
29	PAFZZ	PAOZZ			80205	MS35207-259	...SCREW, MACHINE UOC: EMK, 86Q	2	
30	MFFZZ	MOO			30554	88-21795-8	...WIRE, ELECTRICAL MAKE FROM P/N 88-20444-2 (30554), 14 GA WIRE AS REQUIRED UOC: EMK, 86Q	2	
31	PAFZZ	PAOZZ			80131	1N3663	...SEMICONDUCTOR DEVICE DIODE 30 AMP, 400 VOLT UOC: EMK, 86Q	3	
32	PAFZZ	PAOZZ			80121	1N3663R	...SEMICONDUCTOR DEVICE DIODE REVERSE 30 AMP, 400 VOLTS UOC: EMK, 86Q	3	
33	XAFZZ	XA			36156	778715-0A	...PLATE, RECTIFIER MO UOC: EMK, 86Q	1	
34	XDFZZ	XB			36156	707806-0A	...RECTIFIER, HUB UOC: EMK, 86Q	1	
35	XDFZZ	XB			36156	791149-0A	...ROTOR ASSY, EXCITER UOC: EMK, 86Q	1	
36	XDFZZ	XB			96906	MS20066-352	...KEY, MACHINE UOC: EMK, 86Q	1	
37	PAFZZ	PAOZZ			96906	MS20659-105	...TERMINAL, LUG UOC: EMK, 86Q	5	
38	XDFZZ	XB			36156	707329-01	...HUB, DRIVE UOC: EMK, 86Q	1	
39	XDFZZ	XB			96906	MS20066-354	...KEY, MACHINE UOC: EMK, 86Q	1	
40	PBFZZ	PBOZZ			36156	716327-0A	...IMPELLER, FAN, AXIAL UOC: EMK, 86Q	1	
41	PAFZZ	PAOZZ			96906	MS51922-9	NUT, SELF-LOCKING, HEX UOC: EMK, 86Q	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7) USMC QTY PER EQUIP
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	
42	PAFZZ	PAOZZ			80205	MS90725-43	SCREW, CAP, HEX HEAD UOC: EMK, 86Q	2	
43	XAFZZ	XA			30554	88-21783	FAN, HALF UOC: EMK, 86Q	2	
44	PAFZZ	PAOZZ			96906	MS90726-58	..SCREW, CAP, HEX HEAD UOC: EMK, 86Q	6	
45	PAFZZ	PAOZZ			96906	MS27183-13	..WASHER, FLAT UOC: EMK, 86Q	8	
46	PAFZZ	PAOZZ			80204	B1821BH038F 138N	..SCREW, CAP, HEX HEAD UOC: EMK, 86Q	2	
47	XDFZZ	XB			30554	88-22339	..SPACER, SLEEVE UOC: EMK, 86Q	2	
48	XDFZZ	XB			36156	702806-01	..DISC, COUPLING UOC: EMK, 86Q	2	
49	XDFZZ	XB			36156	783621-0A	..STATOR ASSY UOC: EMK, 86Q	1	
50	PAFZZ	PAOZZ			96906	MS51937-5	..BOLT, EYE UOC: EMK, 86Q	1	
51	PAFZZ	PAOZZ			96906	MS51967-14	..NUT, PLAIN, HEX UOC: EMK, 86Q	1	
52	MDFZZ	MDO			36156	A-9696	..LABEL, WARNING UOC: EMK, 86Q	1	
53	PAFZZ	PAOZZ			80205	MS21318-21	..SCREW, DRIVE UOC: EMK, 86Q	4	
54	MDFZZ	MDO			30554	88-20064-5	..PLATE, IDENTIFICATION UOC: EMK, 86Q	1	
55	XDFZZ	XB			36156	706336-03	..FRAME, STATOR HOUSING UOC: EMK, 86Q	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

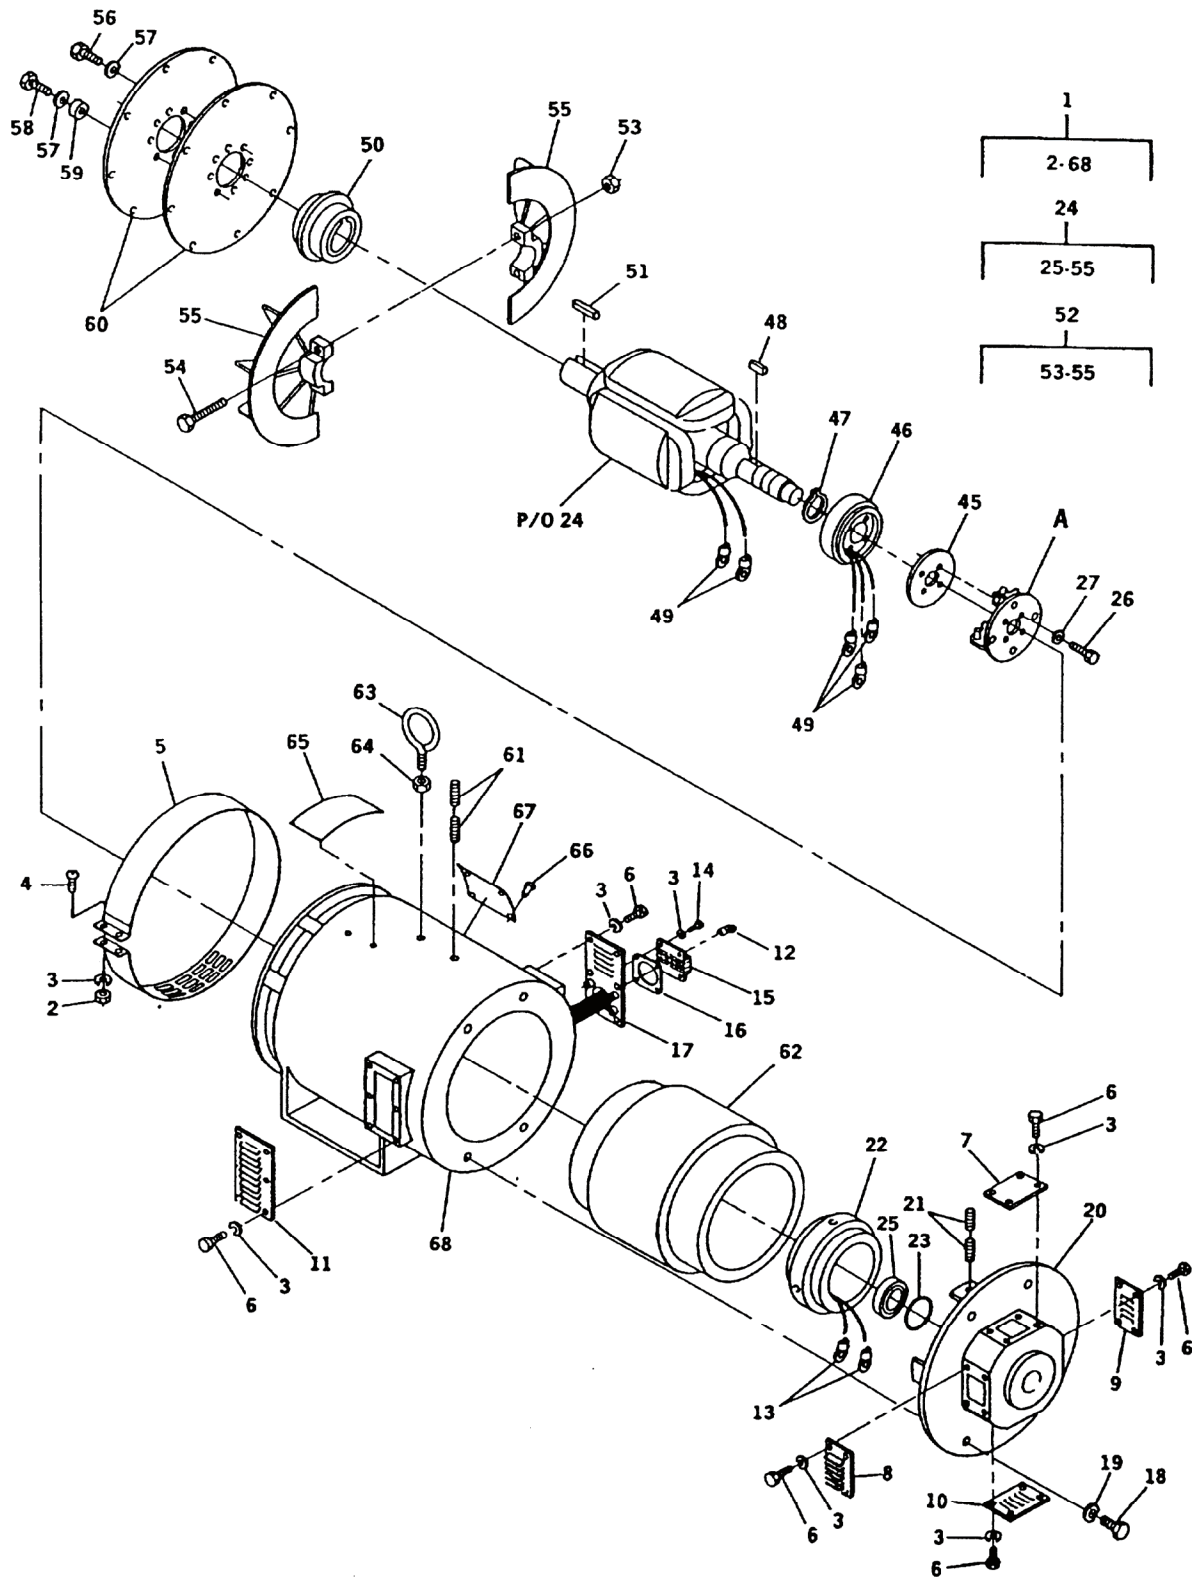


Figure 22. Generator Assembly, 400 Hz (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

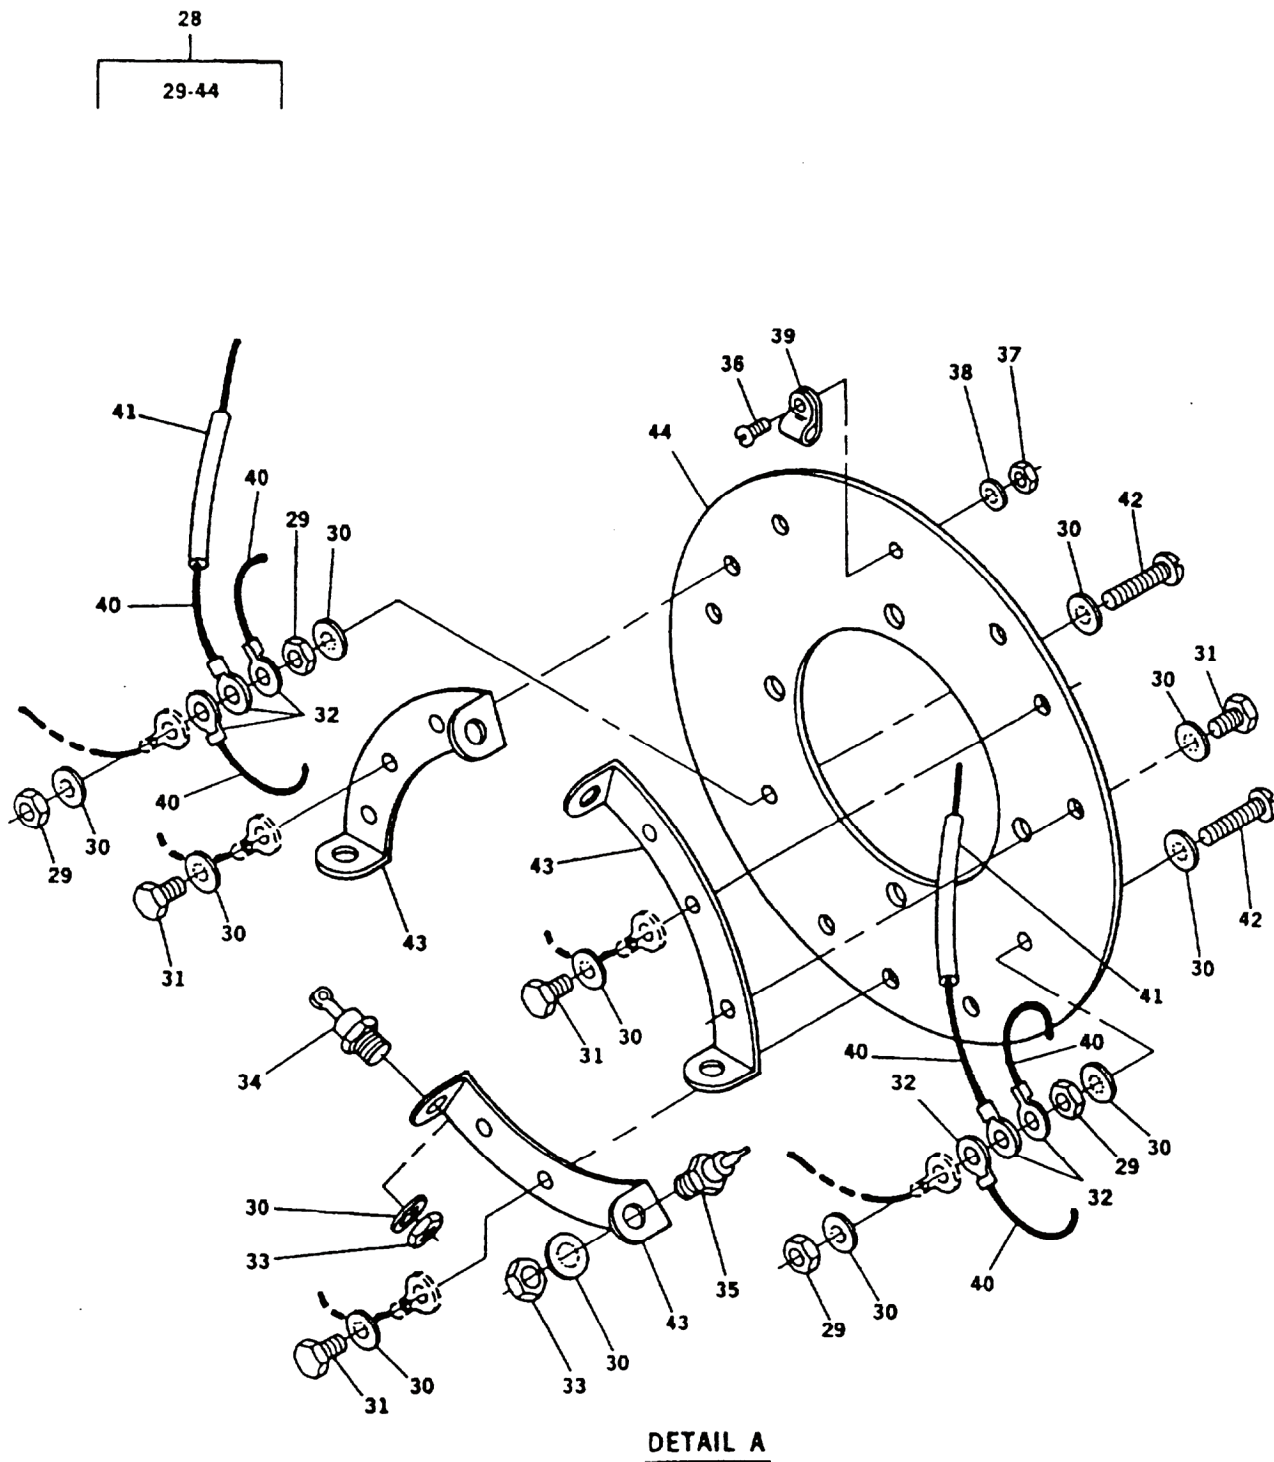


Figure 22. Generator Assembly, 400 Hz (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
							GROUP 11 - GENERATOR ASSEMBLY		
							FIG. 22 GENERATOR ASSEMBLY, 400 HZ		
1	PBFFH	PBFFH			30554	88-21006	.GENERATOR, ALTERNATING CURRENT, 400 HZ UOC: YNN, 86R	1	
2	PAFZZ	PAOZZ			96906	MS51967-2	..NUT, PLAIN, HEX UOC: YNN, 86R	2	
3	PAFZZ	PAOZZ			80205	MS35338-63	..WASHER, LOCK UOC: YNN, 86R	34	
4	PAFZZ	PAOZZ			80205	MS35206-287	..SCREW, MACHINE UOC: YNN, 86R	2	
5	XDFZZ	XB			36156	720982-OA	..COVER, BAND UOC: YNN, 86R	1	
6	PAFZZ	PAOZZ			96906	MS90725-3	..SCREW, CAP, HEX HEAD UOC: YNN, 86R	28	
7	XDFZZ	XB			36156	718514-01	..COVER, TOP UOC: YNN, 86R	1	
8	XDFZZ	XB			36156	718516-01	..COVER, LOUVERED, LS UOC: YNN, 86R	1	
9	XDFZZ	XB			36156	71851501	..COVER, LOUVERED, RS UOC: YNN, 86R	1	
10	XDFZZ	XB			36156	718517-01	..COVER, LOUVERED, BO UOC: YNN, 86R	1	
11	XDFZZ	XB			30554	88-21804	..PANEL, SIDE VENT UOC: YNN, 86R	1	
12	PAFZZ	PAOZZ			96906	MS20659-128	..TERMINAL, LUG USED ON STATOR LEADS UOC: YNN, 86R	10	
13	PAFZZ	PAOZZ			96906	MS20659-165	..TERMINAL, LUG USED ON EXCITER LEADS UOC: YNN, 86R	2	
14	PAFZZ	PAOZZ			80205	MS90725-6	..SCREW, CAP, HEX HEAD UOC: YNN, 86R	4	
15	XDFZZ	XB			36156	752818-OA	..LEAD CLAMP ASSEMBLY UOC: YNN, 86R	1	
16	XDFZZ	XB			36156	834822-01	..GASKET, LEAD CLAMP UOC: YNN, 86R	1	
17	XDFZZ	XB			36156	718337-01	..PANEL, LEAD EXIT UOC: YNN, 86R	1	
18	PAFZZ	PAOZZ			80205	MS90725-110	..SCREW, CAP, HEX HEAD UOC: YNN, 86R	4	
19	PAFZZ	PAOZZ			96906	MS35338-67	..WASHER, LOCK UOC: YNN, 86R	4	
20	XDFFF	XB			36156	703513-01	..ENDBELL UOC: YNN, 86R	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
21	PAFZA	PAFZA			88044	AN565C416H6	..SETSCREW UOC: YNN, 86R	8	
22	PBFZZ	PBOZZ			36156	789293-0A	..STATOR, GENERATOR UOC: YNN, 86R	1	
23	PAFZZ	PAOZZ			36156	865873-01	..PACKING, PREFORMED UOC: YNN, 86R	1	
24	XDFFF	XB			36156	777068-0A	..ROTOR ASSY 400 HZ UOC: YNN, 86R	1	
25	PAFZZ	PAOZZ			21335	312KDD	...BEARING, BALL, ANNULA UOC: YNN, 86R	1	
26	PAFZZ	PAOZZ			80205	MS90725-5	...SCREW, CAP, HEX HEAD UOC: YNN, 86R	4	
27	PAFZZ	PAOZZ			80205	MS35338-63	...WASHER, LOCK UOC: YNN, 86R	4	
28	PAFFF	PAFFF			36156	777056-0A	...RECTIFIER ASSEMBLY UOC: YNN, 86R	1	
29	PAFZZ	PAOZZ			96906	MS51967-2	NUT, PLAIN, HEX UOC: YNN, 86R	4	
30	PAFZZ	PAOZZ			80205	MS35333-40	WASHER, LOCK UOC: YNN, 86R	21	
31	PAFZZ	PAOZZ			96906	MS90725-3	SCREW, CAP, HEX HEAD UOC: YNN, 86R	9	
32	PAFZZ	PAOZZ			96906	MS25036-154	TERMINAL, LUG UOC: YNN, 86R	6	
33	PAFZZ	PAOZZ			80205	AN3154	NUT, PLAIN, HEX UOC: YNN, 86R	6	
34	PAFZZ	PAOZZ			81349	JANTX1N1 190R	SEMICONDUCTOR DEVIC REVERSE, 35 AMP, 600 VOLT UOC: YNN, 86R	3	
35	PAFZZ	PAOZZ			81349	JANTX1N1190	SEMICONDUCTOR DEVICE, 35 AMP, 600 VOLT UOC: YNN, 86R	3	
36	PAFZZ	PAOZZ			80205	MS35206-248	SCREW, MACHINE UOC: YNN, 86R	1	
37	PAFZZ	PAOZZ			80205	MS35649-282	NUT, PLAIN, HEX UOC: YNN, 86R	1	
38	PAFZZ	PAOZZ			96906	MS35333-38	WASHER, LOCK UOC: YNN, 86R	1	
39	PAFZZ	PAOZZ			96906	MS25281-4	CLAMP, LOOP UOC: YNN, 86R	1	
40	MFFZZ	MOO			30554	88-21649-19	WIRE, ELECTRICAL MAKE FROM P/N 88-20444-2 (30554), 14 GA WIRE, AS REQUIRED UOC: YNN, 86R	6	
41	MFFZZ	MOO			30554	88-21649-17	INSULATION, SLEEVING MAKE FROM P/N M3190/03-17-0 (81349), AS REQUIRED UOC: YNN, 86R	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
42	PAFZZ	PAOZZ			80205	MS35206-283	SCREW, MACHINE UOC: YNN, 86R	2	
43	XDFZZ	XB			36156	B-718930-01	PLATE, RECTIFIER MO UOC: YNN, 86R	3	
44	XDFZZ	XB			36156	B-718817-01	PLATE, RECTIFIER IN UOC: YNN, 86R	1	
45	XDFZZ	XB			36156	707807-02	...RECTIFIER HUB UOC: YNN, 86R	1	
46	XDFFF	XB			36156	791150-0A	...ROTOR ASSY, EXCITER UOC: YNN, 86R	1	
47	XAFZZ	XA			96906	MS16624-1300	...RING, RETAINING UOC: YNN, 86R	1	
48	PAFZZ	PAOZZ			96906	MS20066-356	...KEY, MACHINE UOC: YNN, 86R	1	
49	PAFZZ	PAOZZ			96906	MS25036-157	...TERMINAL, LUG UOC: YNN, 86R	5	
50	XDFZZ	XB			36156	707329-01	...HUB, DRIVE UOC: YNN, 86R	1	
51	PAFZZ	PAOZZ			96906	MS20066-354	...KEY, MACHINE UOC: YNN, 86R	1	
52	PBFZZ	PBOZZ			36156	716327-0A	...IMPELLER, FAN, AXIAL UOC: YNN, 86R	1	
53	PAFZZ	PAOZZ			96906	MS51922-9	NUT, SELF-LOCKING, HEX UOC: YNN, 86R	2	
54	PAFZZ	PAOZZ			96906	MS90725-43	SCREW, CAP, HEX HEAD UOC: YNN, 86R	2	
55	XAFZZ	XA			30554	88-21783	FAN, HALF UOC: YNN, 86R	2	
56	PAFZZ	PAOZZ			80205	MS90726-58	..SCREW, CAP, HEX HEAD UOC: YNN, 86R	6	
57	PAFZZ	PAOZZ			96906	MS27183-13	..WASHER, FLAT UOC: YNN, 86R	8	
58	PAOZZ	PAOZZ			80204	B1821BH038F 138N	..SCREW, CAP, HEX HEAD UOC: YNN, 86R	2	
59	XDFZZ	XB			30554	88-22339	..SPACER, COUPLER UOC: YNN, 86R	2	
60	XDFZZ	XB			36156	702806-01	..DISC, COUPLING UOC: YNN, 86R	2	
61	PAFZZ	PAOZZ			88044	AN565C816H 16	..SETSCREW UOC: YNN, 86R	2	
62	XDFZZ	XB			36156	783622-0A	..STATOR CORE, MAIN W UOC: YNN, 86R	1	
63	PAFZZ	PAOZZ			96906	MS51937-7	..BOLT, EYE UOC: YNN, 86R	1	
64	PAFZZ	PAOZZ			96906	MS51967-20	..NUT, PLAIN, HEX UOC: YNN, 86R	1	
65	MDFZZ	MDO			36156	A-9696	..LABEL, WARNING UOC: YNN, 86R	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
66	PAFZZ	PAOZZ			80205	MS21318-21	..SCREW, DRIVE UOC: YNN, 86R	4	
67	MDFZZ	MDO			30554	88-20064-6	..PLATE, IDENTIFICATION UOC: YNN, 86R	1	
68	XDFZZ	XB			30554	88-21798	..FRAME, STATOR HOUSING UOC: YNN, 86R	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

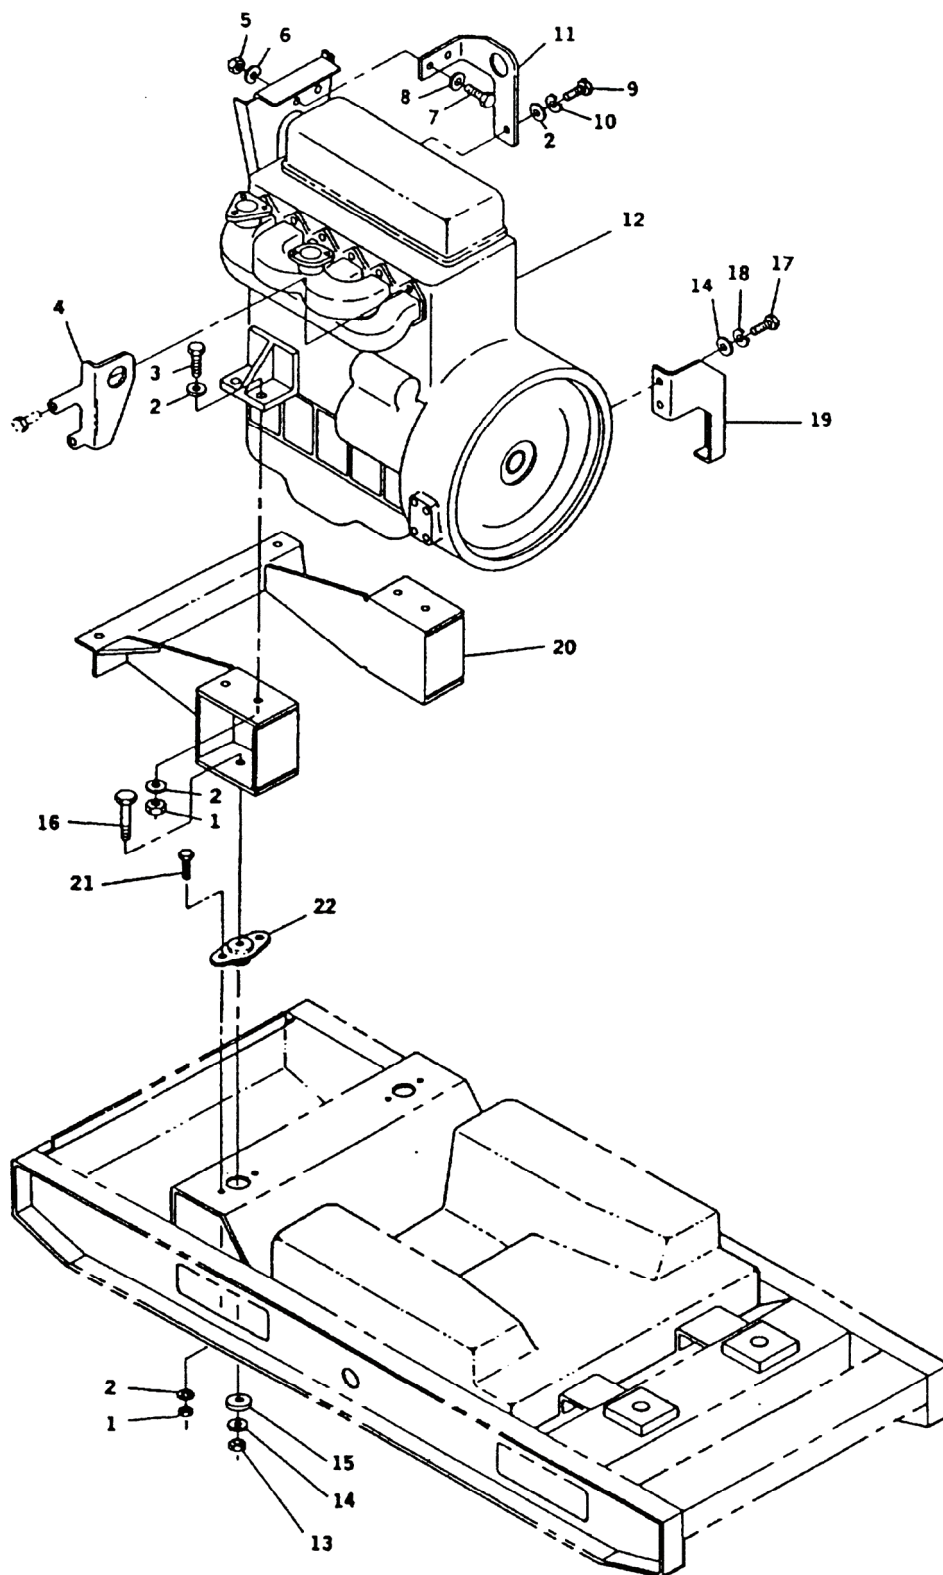


Figure 23. Engine Installation.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7) USMC QTY PER EQUIP
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	
GROUP 12 - ENGINE ASSEMBLY									
FIG. 23 ENGINE INSTALLATION									
1	PAFZZ	PAOZZ			96906	MS51493-5	.NUT, SELF-LOCKING UOC: EMK, YNN	8	
2	PAFZZ	PAOZZ			96906	MS51412-7	.WASHER, FLAT UOC: EMK, YNN	14	
3	PAFZZ	PAOZZ			80204	B1821BH038 C150N	.SCREW, CAP, HEX HEAD UOC: EMK, YNN	4	
4	XDOZZ	XB			30554	88-22321	.BRACKET, ENGINE REAR UOC: EMK, YNN	1	
5	PAOZZ	PAOZZ			30554	88-22790-1	.NUT, PLAIN, HEX UOC: EMK, YNN	2	
6	PAOZZ	PAOZZ			80205	MS35338-63	.WASHER, LOCK UOC: EMK, YNN	2	
7	PAOZZ	PAOZZ			30554	88-20260-32	.SCREW, HEX WASHERHEAD UOC: EMK, YNN	2	
8	PAFZZ	PAOZZ			96906	MS51412-4	.WASHER, FLAT UOC: EMK, YNN	2	
9	XDOZZ	XB			80204	B18231B8025N	.SCREW, CAP, HEX HEAD UOC: EMK, YNN	1	
10	PAOZZ	PAOZZ			30554	88-22331-1	.WASHER, LOCK UOC: EMK, YNN	1	
11	XDOZZ	XB			30554	88-22425	.STRAP, ENGINE LIFTING UOC: EMK, YNN	1	
12	PAFHH	PAFHH			30554	88-22315	.ENGINE, DIESEL (SEE TM 9-2815-254-24P FOR PARTS) UOC: EMK, YNN	1	
13	PAFZZ	PAOZZ			96906	MS51943-9	.NUT, SELF-LOCKING UOC: EMK, YNN	2	
14	PAFZZ	PAOZZ			96906	MS51412-9	.WASHER, FLAT UOC: EMK, YNN	8	
15	PBFZZ	PBOZZ			30554	88-20247-2	.WASHER, FLAT UOC: EMK, YNN	2	
16	PAFZZ	PAOZZ			80204	B1821BH050 C300N	.SCREW, CAP, HEX HEAD UOC: EMK, YNN	2	
17	PAOZZ	PAOZZ			80204	B1821BH050 C100N	.SCREW, CAP, HEX HEAD UOC: EMK, YNN	4	
18	PAOZZ	PAOZZ			96906	MS35338-67	.WASHER, LOCK UOC: EMK, YNN	4	
19	XDFZZ	XB			30554	88-22135	.SUPPORT, ENGINE REAR UOC: EMK, YNN	2	
20	XDFZZ	XB			30554	88-22174	.SUPPORT, ENGINE UOC: EMK, YNN	1	
21	PAFZZ	PAOZZ			80204	B1821BH038 C100N	.SCREW, CAP, HEX HEAD UOC: EMK, YNN	4	
22	PAFZZ	PAOZZ			30554	88-21071-3	.MOUNT, ENGINE UOC: EMK, YNN	2	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

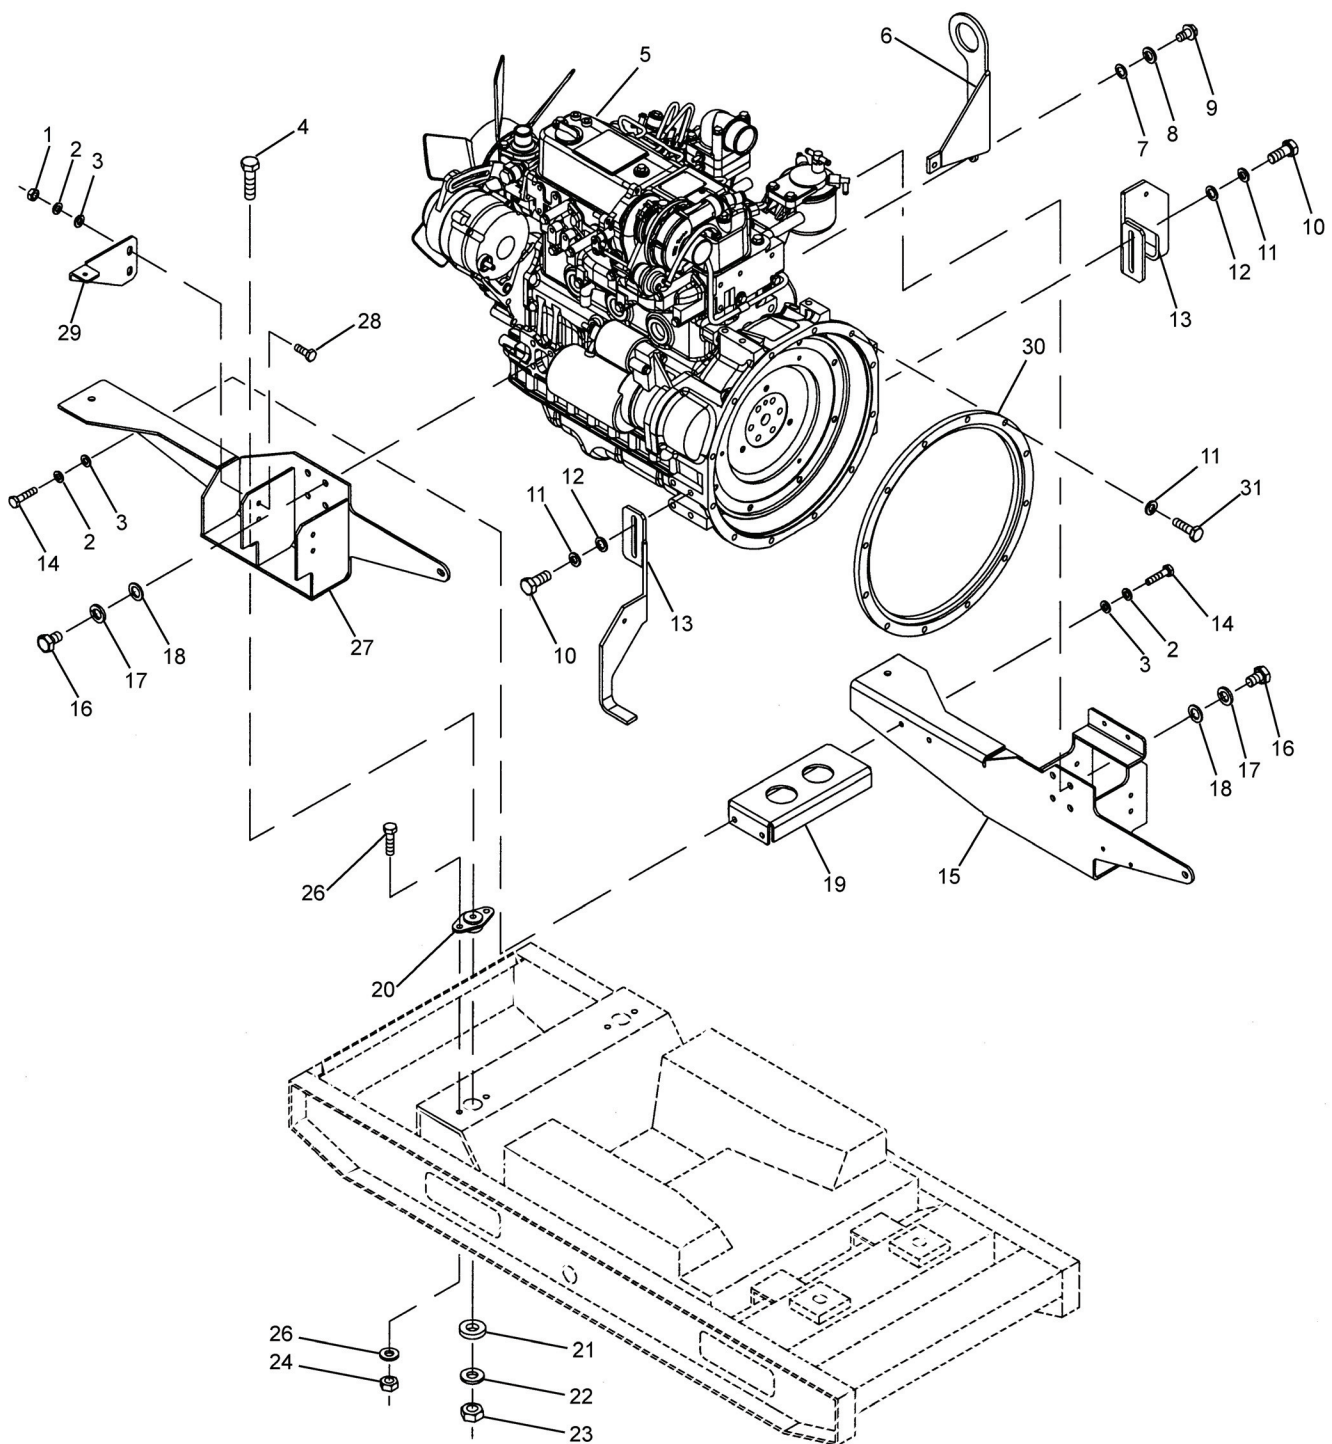


Figure 23.1. Engine Installation.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
	SMR CODE								USMC
	a.	b.	c.	d.					QTY
ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	PER EQUIP
GROUP 12 - ENGINE ASSEMBLY									
FIG. 23.1 ENGINE INSTALLATION									
1	PAOZZ				30554	88-22790-1	.NUT, HEX HEAD UOC: 86Q, 86R	2	
2	PAOZZ				30554	88-20556-38	.WASHER, LOCK UOC: 86Q, 86R	6	
3	PAOZZ				30554	88-20033-21A	.WASHER, FLAT UOC: 86Q, 86R	6	
4	PAOZZ				80204	B1821BH050 C300N	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	2	
5	PAFHH				30554	97-24010	.DIESEL ENGINE (SEE TM 9-2815-538-24&P FOR PARTS) UOC: 86Q, 86R	1	
6	XBFZZ				30554	97-24023	.RING, LIFT, REAR UOC: 86Q, 86R	1	
7	PAOZZ				30554	88-20033-24A	.WASHER, FLAT UOC: 86Q, 86R	3	
8	PAOZZ				30554	88-22331-1	.WASHER, LOCK SPRING UOC: 86Q, 86R	3	
9	PAOZZ				81343	B18231A03014	.SCREW UOC: 86Q, 86R	3	
10	PAOZZ				80204	B18231A10 025N	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	4	
11	PAOZZ				30554	88-22331-2	.WASHER, LOCK-SPRING UOC: 86Q, 86R	16	
12	PAOZZ				30554	88-20033-31A	.WASHER, FLAT UOC: 86Q, 86R	4	
13	XBFZZ				30554	97-24038	.SUPPORT, ENGINE, REAR UOC: 86Q, 86R	2	
14	PAOZZ				30554	88-20260-35	.SCREW/WASHER UOC: 86Q, 86R	4	
15	XBOZZ				30554	97-24013	.SUPPORT, RADIATOR, RH UOC: 86Q, 86R	1	
16	PAOZZ				80204	B18231A10 020N	.BOLT, MACHINE UOC: 86Q, 86R	10	
17	PAOZZ				30554	88-22331-2	.WASHER, LOCK UOC: 86Q, 86R	10	
18	PAOZZ				30554	88-20033-31A	.WASHER, FLAT UOC: 86Q, 86R	10	
19	XBOZZ				30554	97-24014	.CROSS MEMBER UOC: 86Q, 86R	1	
20	PAOZZ				30554	88-21071-3	.MOUNT, ENGINE UOC: 86Q, 86R	2	
21	PAOZZ				30554	88-20247-2	.WASHER, SNUBBING UOC: 86Q, 86R	2	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
22	PAOZZ				30554	88-20033-31A	.WASHER, FLAT UOC: 86Q, 86R	2	
23	PAOZZ				30554	88-20568-5	.NUT, SELF-LOCKING UOC: 86Q, 86R	2	
24	PAOZZ				30554	88-20568-4	.NUT, SELF-LOCKING UOC: 86Q, 86R	4	
25	PAOZZ				30554	88-20033-34A	.WASHER, FLAT UOC: 86Q, 86R	4	
26	PAOZZ				80204	B1821BH038 C100N	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	4	
27	XBOZZ				30554	97-24012	.SUPPORT, RADIATOR, LH UOC: 86Q, 86R	1	
28	PAOZZ				30554	88-20260-30	.SCREW, CAP, HEX HEAD UOC: 86Q, 86R	2	
29	XBOZZ				30554	97-24039	.SUPPORT, GUARD REAR L UOC: 86Q, 86R	1	
30	PBOZZ				30554	97-24037	.SPACER, GENERATOR UOC: 86Q, 86R	1	
31	PAOZZ				30554	97-24116-5	.SCREW, CAP, HEX HEAD UOC: 86Q	12	
31	PAOZZ				30554	97-24116-6	.SCREW, CAP, HEX HEAD UOC: 86R	12	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

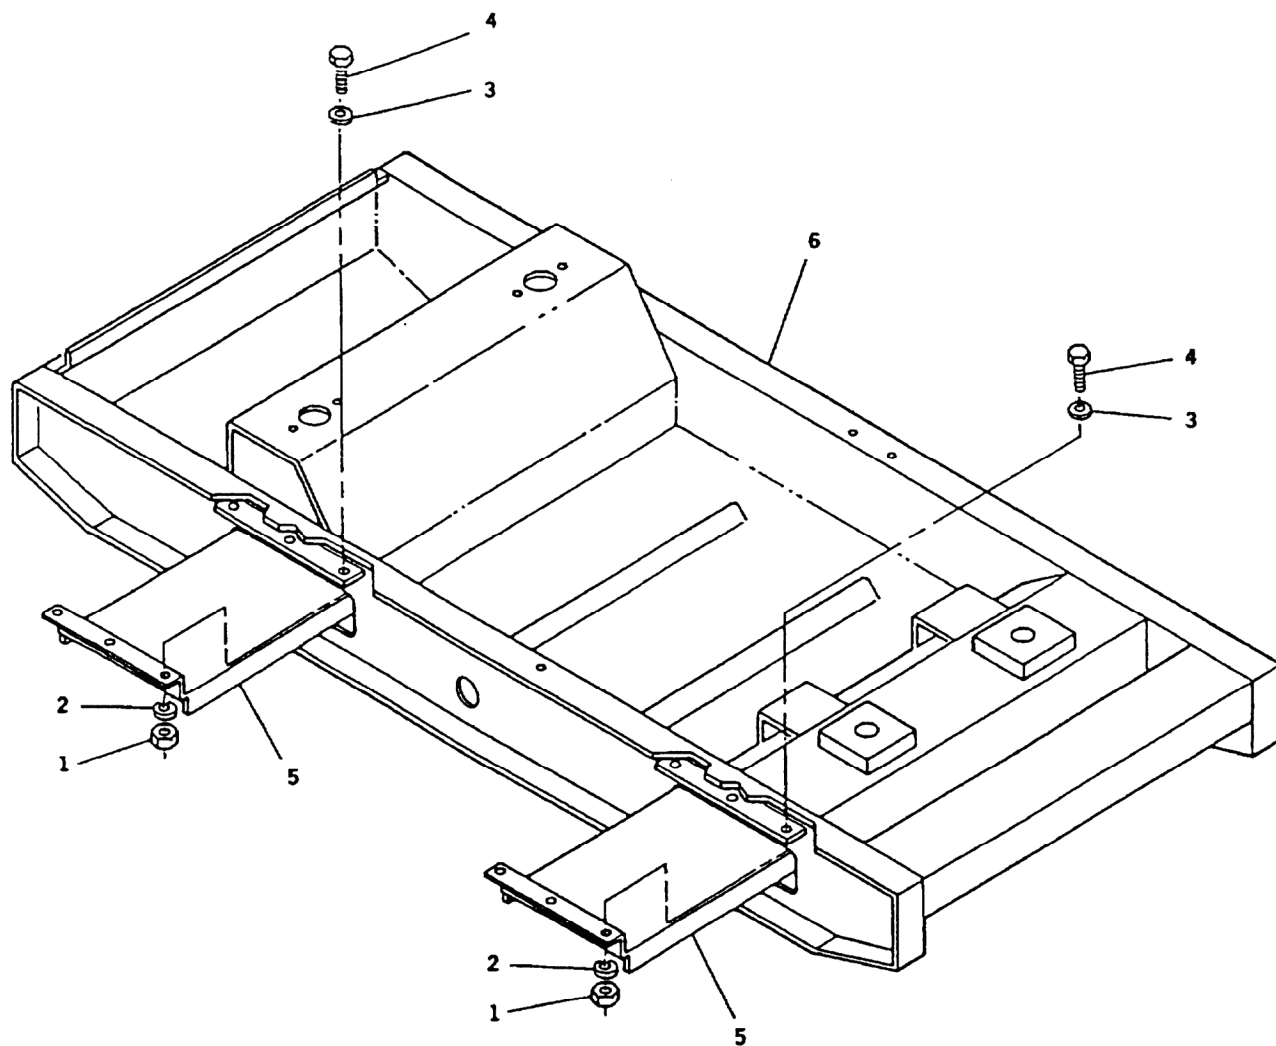


Figure 24. Skid Base.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7)
ITEM	a.	b.	c.	d.		PART	DESCRIPTION AND		USMC
NO.	ARMY	FORCE	NAVY	USMC	FSCM	NUMBER	USABLE ON CODE (UOC)	QTY	QTY PER EQUIP
GROUP 13 - SKID BASE									
FIG. 24 SKID BASE									
1	PAOZZ	PAOZZ			30554	88-22790-3	.NUT, PLAIN, HEX	12	
2	PAOZZ	PAOZZ			80205	MS35338-65	.WASHER, LOCK	12	
3	PAOZZ	PAOZZ			96906	MS51412-7	.WASHER, FLAT	12	
4	PAOZZ	PAOZZ			80204	B1821BH038 C100N	.SCREW, CAP, HEX HEAD	12	
5	XDOZZ	XB			30554	88-21731	.GUIDE, FORK LIFT	2	
6	XDFZZ	XB			30554	88-22007	.SKID BASE ASSY	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

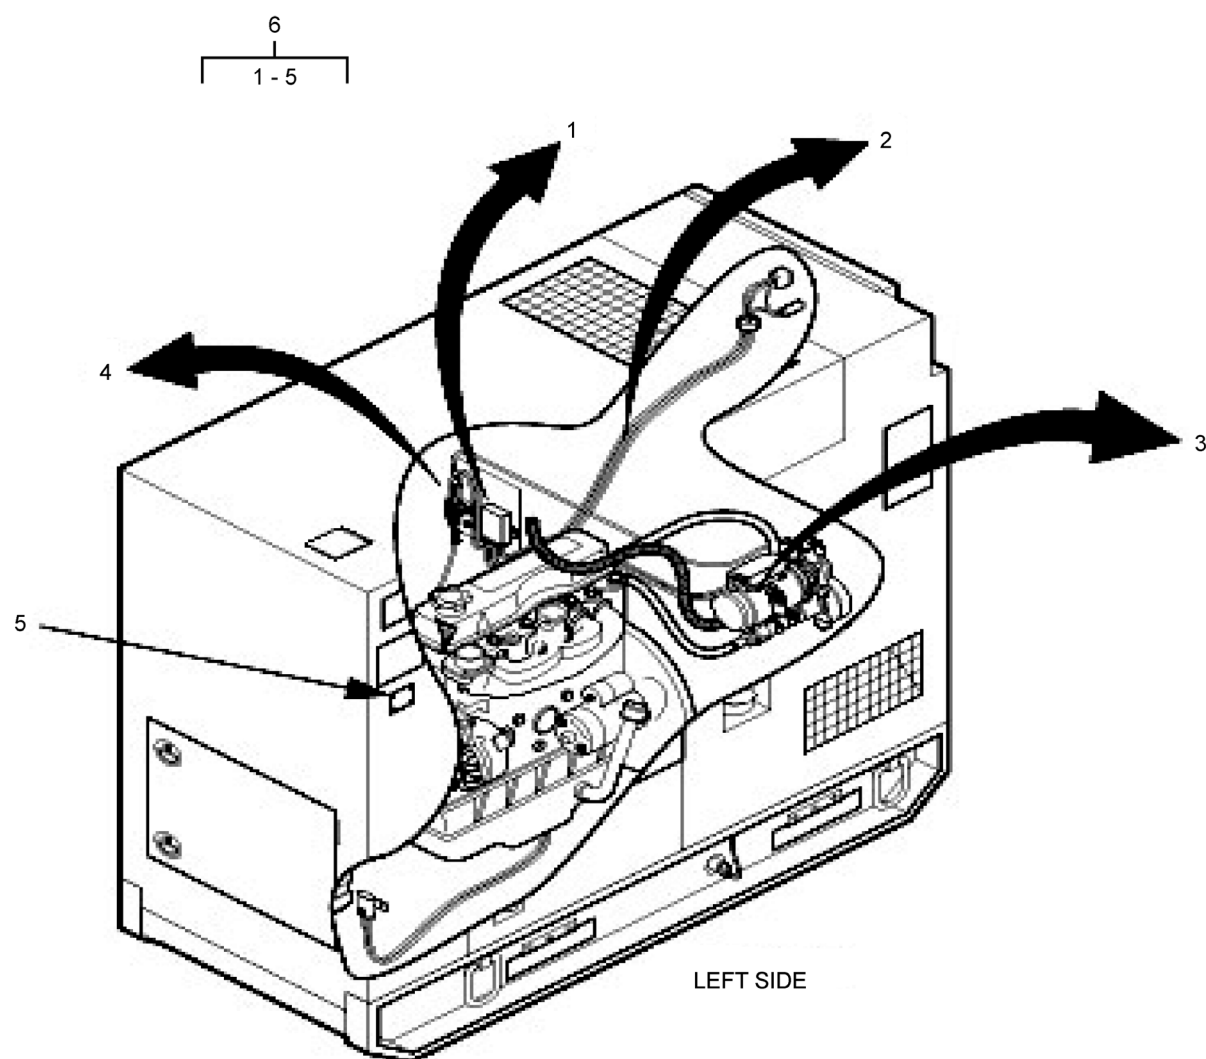


Figure 25. Winterization Kit.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
	ARMY	FORCE	NAVY	USMC					
GROUP 14 - WINTERIZATION KIT									
FIG. 25 WINTERIZATION KIT									
1	PAOZZ				30554	98-2014	.CONTROL UNIT SEE FIGURE 26 FOR PARTS UOC: EMK, YNN	1	
2	PAOOO				30554	98-2018-1	.WIRING HARNESS, J1 SEE FIGURE 33 FOR PARTS UOC: EMK, YNN	1	
3	PAOOO				30554	98-2000	. HEATER, COOLANT, ENG SEE FIGURE 29 FOR PARTS UOC: EMK, YNN	1	
4	PAOOO				30554	98-2013	.PUMP, FUEL, ELECTRICAL AND ATTACHMENTS SEE FIGURE 28 FOR PARTS UOC: EMK, YNN	1	
5	XBOZZ				30554	98-2053-3	.PLATE IDENTIFICATION UOC: EMK, YNN	1	
6	PAOZZ				30554	98-2015	KIT, HEATER UOC, EMK, YNN	--	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

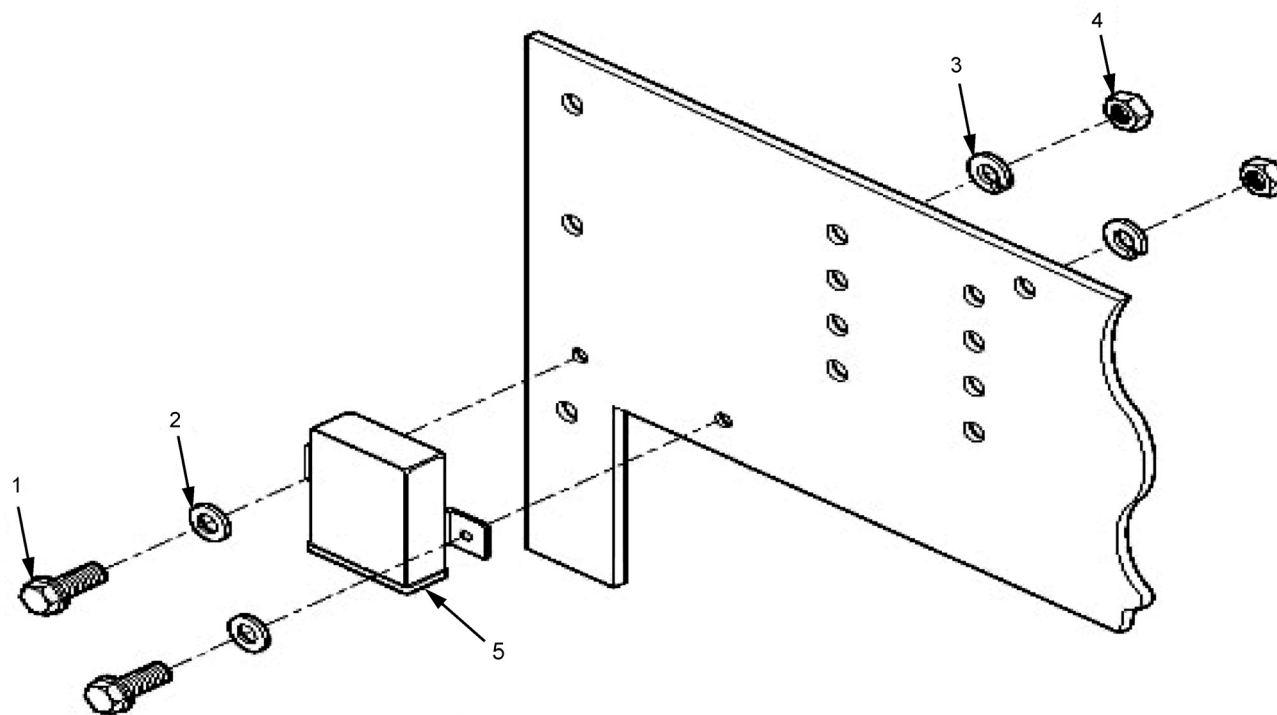


Figure 26. Control Unit.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
	ARMY	AIR FORCE	NAVY	USMC					
GROUP 14 - WINTERIZATION KIT									
FIG. 26 CONTROL UNIT									
1	XBOZZ				30554	88-20260-21	..SCREW, HEX WASHERHE UOC: EMK, YNN	2	
2	XBOZZ				30554	88-20033-10A	..WASHER, FLAT UOC: EMK, YNN	2	
3	XBOZZ				30554	88-20556-4	..WASHER, LOCK UOC: EMK, YNN	2	
4	XBOZZ				30554	13218E0320-49	..NUT, PLAIN, HEX UOC: EMK, YNN	2	
5	PAOZZ				30554	98-2014	.CONTROL UNIT UOC: EMK, YNN	REF	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

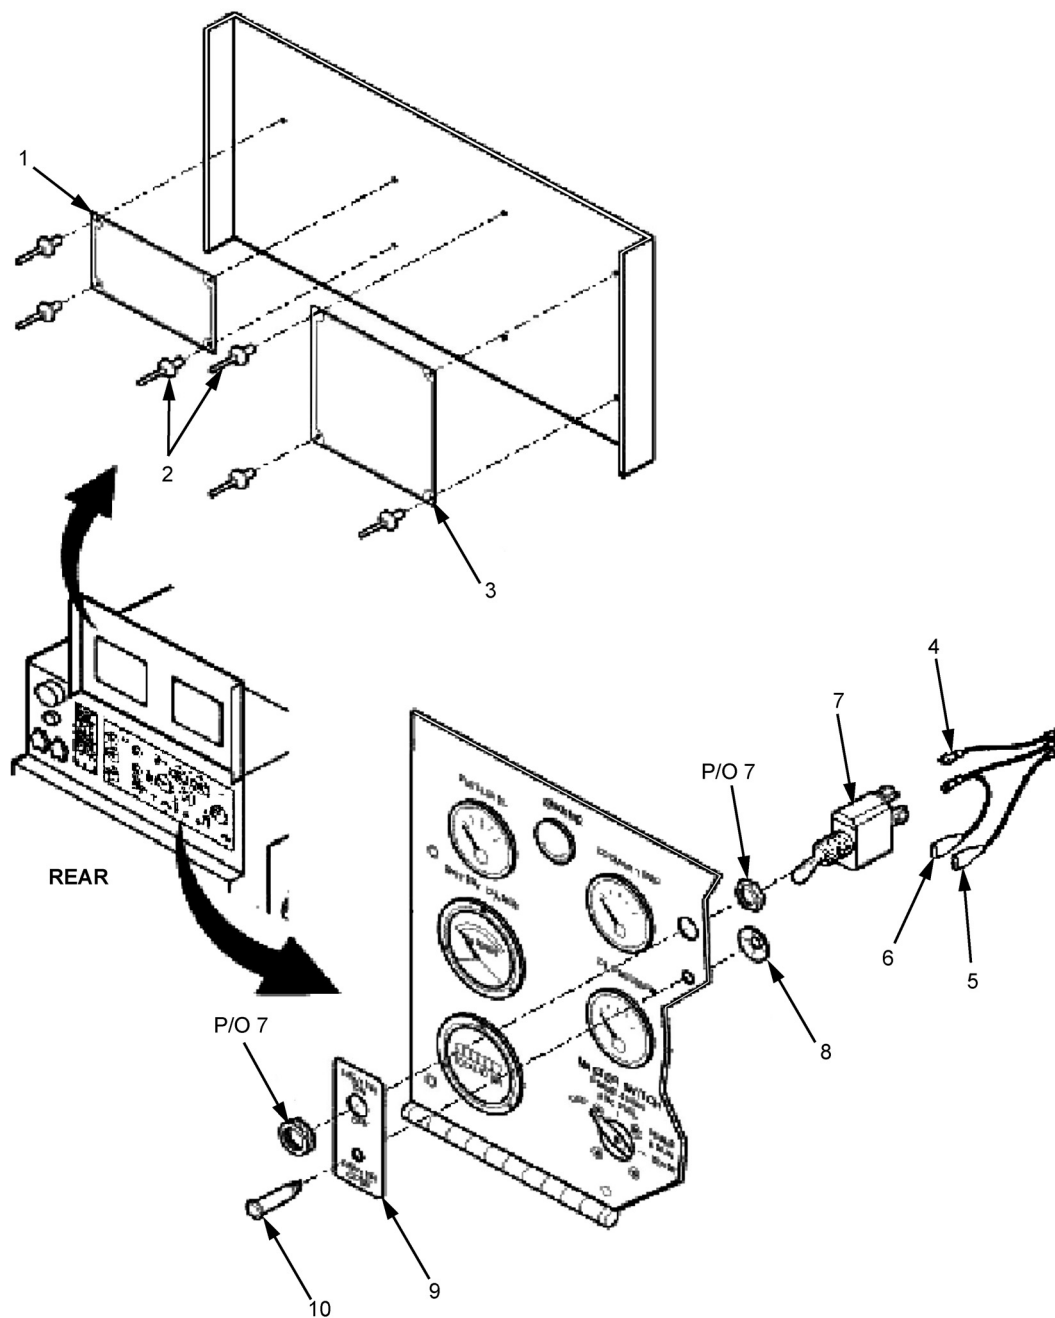


Figure 27. Plate, Operation and Heater Switch.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
ARMY	FORCE	NAVY	USMC						
GROUP 14 - WINTERIZATION KIT									
FIG. 27 OPERATING PLATES AND SWITCH									
1	MOOZZ				30554	98-2041	.PLATE, OPERATING INST UOC: EMK, YNN	1	
2	XBOZZ				97403	13214E3789-2	..RIVET, BLIND UOC: EMK, YNN	8	
3	MOOZZ				30554	98-2001	.PLATE, HEATER FUNCTION UOC: EMK, YNN	1	
4	MOOOO				30554	98-2049-4	.LEAD, ELECTRICAL SEE FIGURE 34 FOR PARTS UOC: EMK, YNN	1	
5	MOOOO				30554	98-2049-3	.LEAD, ELECTRICAL SEE FIGURE 34 FOR PARTS UOC: EMK, YNN	1	
6	MOOOO				30554	98-2050	.LEAD, ELECTRICAL, SEE FIGURE 34 FOR PARTS UOC: EMK, YNN	1	
7	XBOZZ				30554	88-22141	.SWITCH, TOGGLE UOC: EMK, YNN	1	
8	XBOZZ				30554	98-2043	..PUSH ON NUT UOC: EMK, YNN	1	
9	XBOZZ				30554	98-2021	.LABEL, HEATER SWITCH UOC: EMK, YNN	1	
10	XBOZZ				30554	98-2003	.LIGHT, INDICATOR UOC: EMK, YNN	1	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

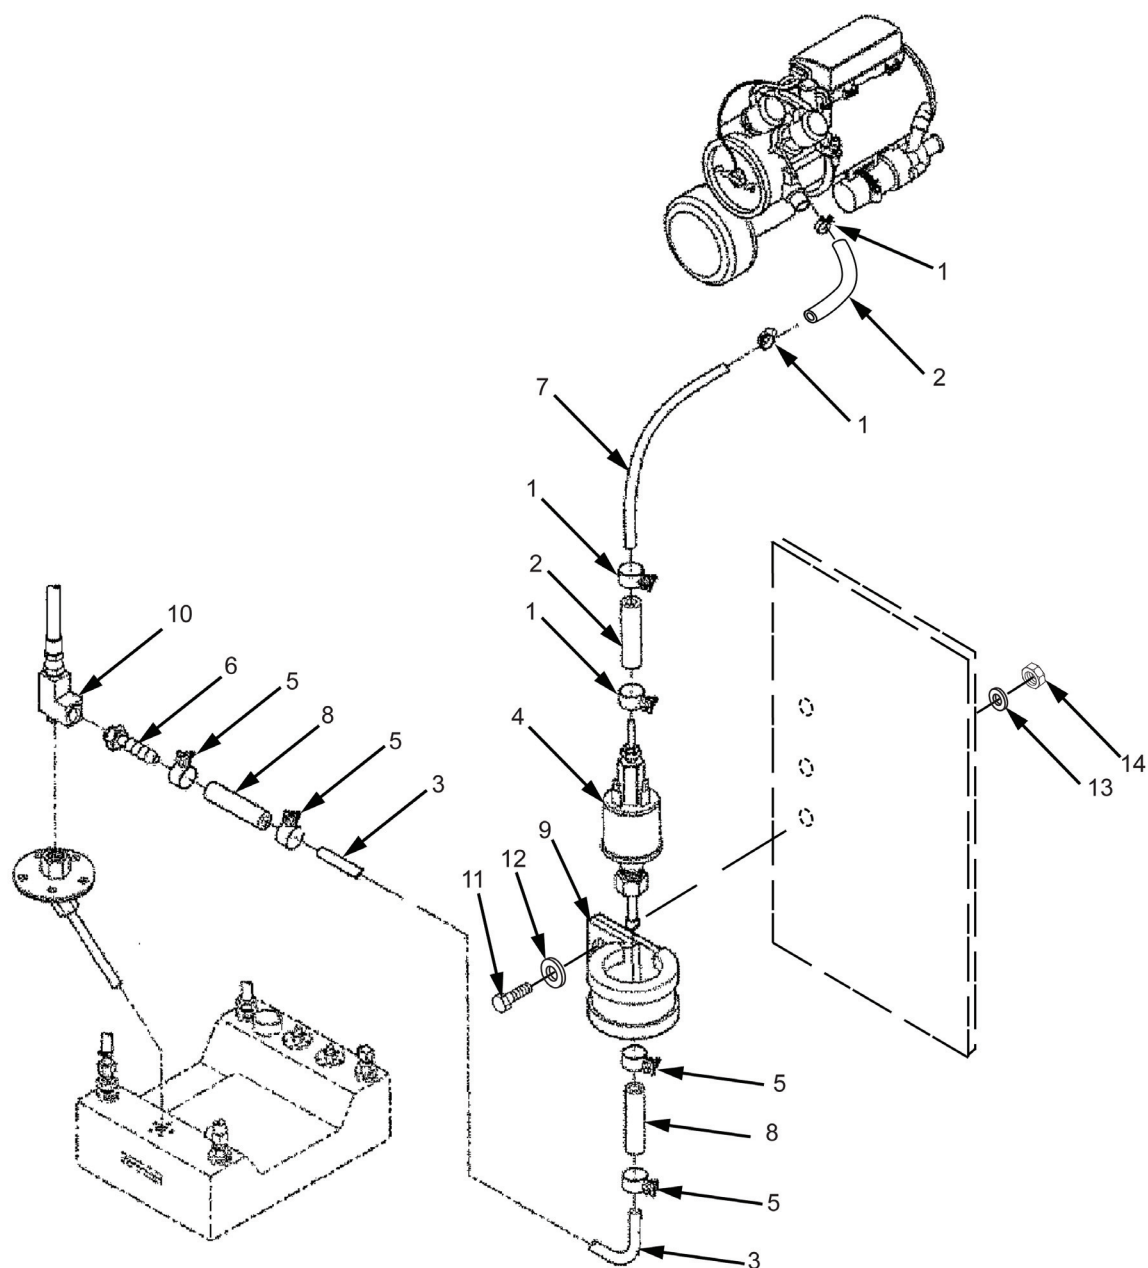


Figure 28. Pump, Fuel, Electrical, and Attachments.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
	ARMY	AIR FORCE	NAVY	USMC					
GROUP 14 - WINTERIZATION KIT									
FIG. 28 PUMP, FUEL, ELECTRICAL AND ATTACHMENTS									
1	XBOZZ				81343	J1508-10 TYPE D	.CLAMP, HOSE UOC: EMK, YNN	4	
2	XBOZZ				81343	J30R7-TYPE 1- 5/32ID	.HOSE, NONMETALLIC IS 2 INCHES LONG UOC: EMK, YNN	2	
3	PAOZZ				1C645	DIN73378-6x2- PA12-HL-sw	.TUBING, 6X2MM, BLACK, TUBING IS 24 IN. L UOC: EMK, YNN	1	
4	PAOZZ				30554	98-2013	.PUMP FUEL UOC: EMK, YNN	REF	
5	XBOZZ				81343	J1508-13 TYPE D	.CLAMP, HOSE UOC: EMK, YNN	4	
6	XBOZZ				30554	98-2025-3	.ADAPTER, STRAIGHT, PI UOC: EMK, YNN	1	
7	PAOZZ				1C645	DIN73378-4x1.25- PA12-HL-nf	.TUBING, 4X1.25MM, NAT, TUBING IS 32 IN. L UOC: EMK, YNN	1	
8	XBOZZ				81343	J30R7-TYPE 1- 3/16ID	.HOSE NONMETALLIC HOSE IS 2 INCH LONG UOC: EMK, YNN	2	
9	XBOZZ				30554	88-20037WDG21	.CLAMP, LOOP, CUSHION UOC: EMK, YNN	1	
10	XBOZZ				81343	4-4-4-140424B	.TEE, PIPE UOC: EMK, YNN	1	
11	XBOZZ				30554	88-20260-21	..SCREW, HEX WASHERHE UOC: EMK, YNN	1	
12	XBOZZ				30554	88-20033-10A	..WASHER, FLAT UOC: EMK, YNN	1	
13	XBOZZ				30554	88-20556-4	..WASHER, LOCK UOC: EMK, YNN	1	
14	XBOZZ				97403	13218E0320-49	..NUT, PLAIN, HEX UOC: EMK, YNN	1	

END OF FIGURE

SECTION II. REPAIR PARTS LIST (CONTINUED)

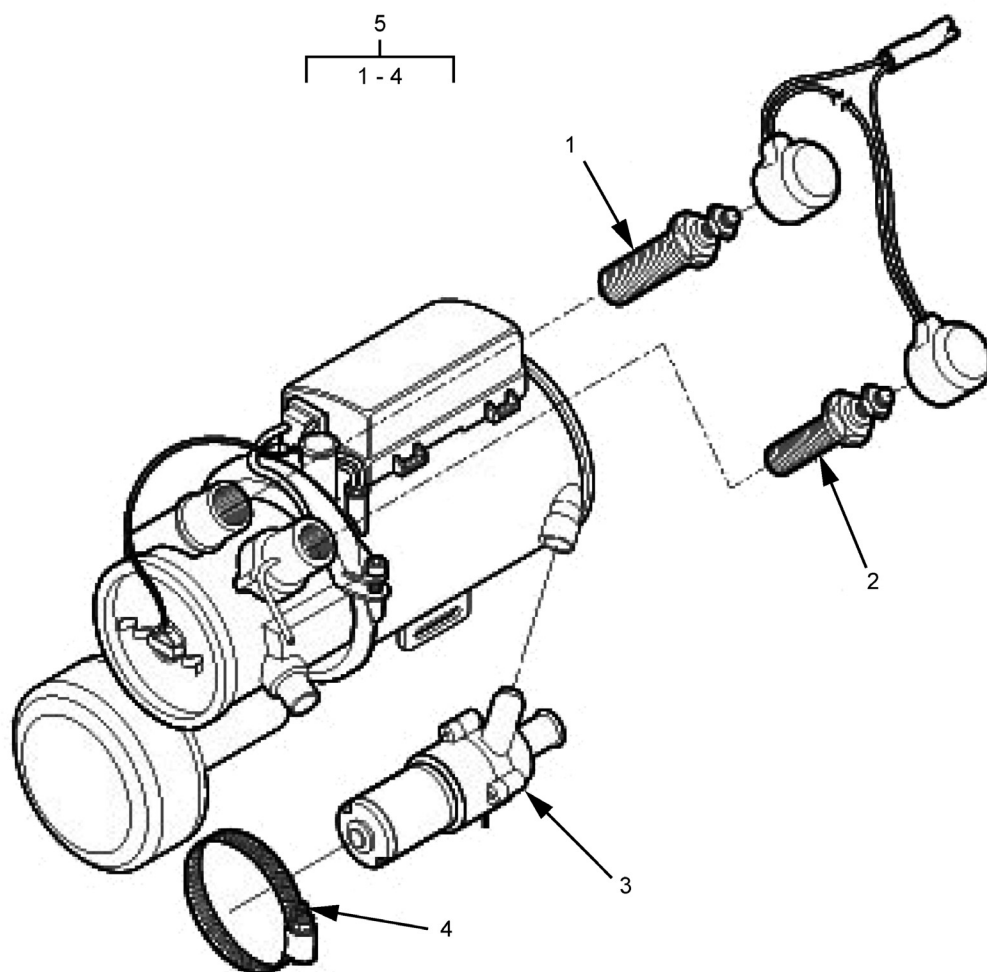


Figure 29. Heater Assembly.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7)
ITEM	a.	b.	c.	d.	FSCM	PART	DESCRIPTION AND	QTY	USMC
NO.	ARMY	FORCE	NAVY	USMC		NUMBER	USABLE ON CODE (UOC)		QTY
									PER
									EQUIP
							GROUP 14 - WINTERIZATION KIT		
							FIG. 29 HEATER ASSEMBLY		
1	PAOZZ				D2212	0102124405	..GLOW PLUG	1	
							UOC: EMK, YNN		
2	PAOZZ				F1425	251667010001	..RESISTOR	1	
							UOC: EMK, YNN		
3	PAOZZ				D8435	251671250100	..WATER PUMP	1	
							UOC: EMK, YNN		
4	XBOZZ				D8435	102064032050	..CLAMP, HOSE	1	
							UOC: EMK, YNN		
5	PAOZZ				30554	98-2000	. HEATER, COOLANT, ENG	REF	
							UOC: EMK, YNN		
							END OF FIGURE		

SECTION II. REPAIR PARTS LIST (CONTINUED)

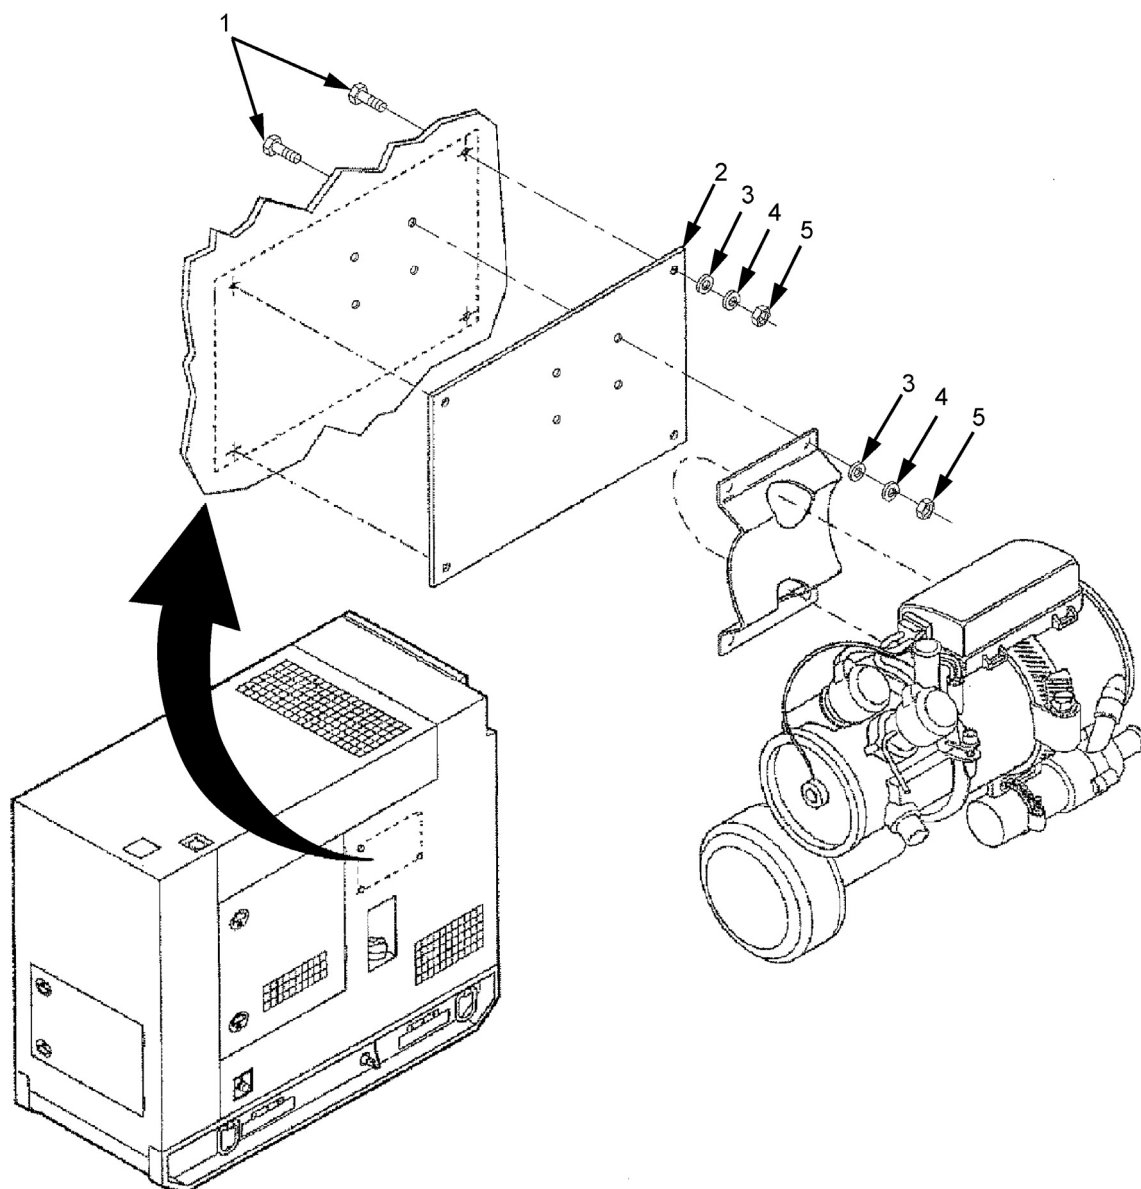


Figure 30. Heater Assembly Attachments.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	PER QTY	USMC EQUIP QTY
	a.	b.	c.	d.					
	ARMY	AIR FORCE	NAVY	USMC					
GROUP 14 - WINTERIZATION KIT									
FIG. 30 HEATER ASSEMBLY ATTACHMENTS									
1	XBOZZ				20554	88-20260-21	..SCREW, HEXWASHERHE UOC: EMK, YNN	8	
2	XBOZZ				30554	98-2002	..PLATE, MOUNTING, HEAT UOC: EMK, YNN	1	
3	XBOZZ				30554	88-20033-10A	..WASHER, FLAT UOC: EMK, YNN	8	
4	XBOZZ				30554	88-20556-4	..WASHER, LOCK UOC: EMK, YNN	8	
5	XBOZZ				97403	13218E0320-49	..NUT, PLAIN, HEX UOC: EMK, YNN	8	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

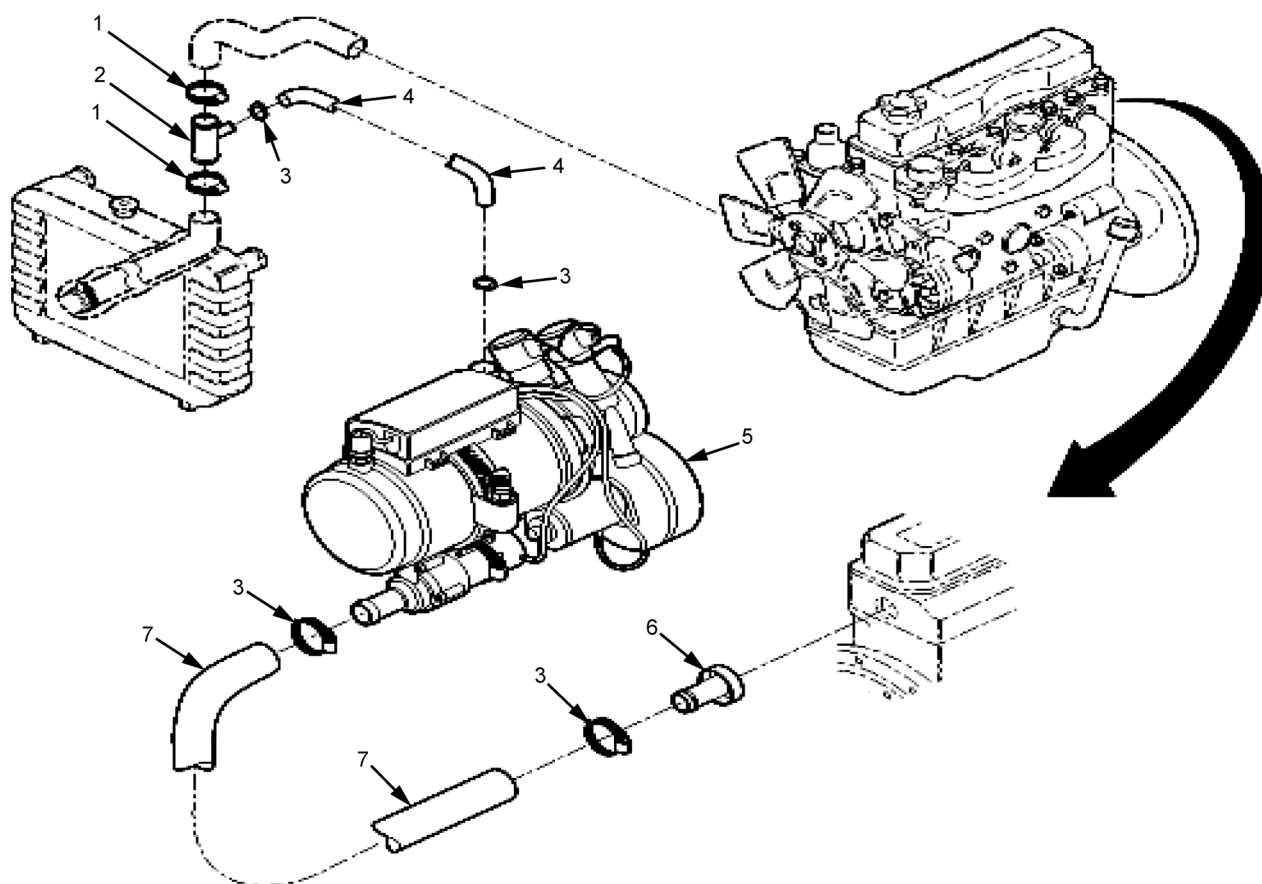


Figure 31. Coolant Hoses and Attachments.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7)
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
GROUP 14 - WINTERIZATION KIT									
FIG. 31 COOLANT HOSES AND ATTACHMENTS									
1	XBOZZ				58536	J1670-24	..CLAMP, TYPE F, SIZE 24 UOC: EMK, YNN	2	
2	XBOZZ				30554	98-2009	..TEE UOC: EMK, YNN	1	
3	XBOZZ				81343	J1670-10	..CLAMP, TYPE F, SIZE 10 UOC: EMK, YNN	4	
4	PAOZZ				30554	98-2059-7	..HOSE, PREFORMED, 90 D, 60 IN. L UOC: EMK, YNN	1	
5	PAOOO				30554	98-2000	..HEATER, COOLANT, ENG UOC: EMK, YNN	REF	
6	XBOZZ				30554	98-2022	..PLUG, EXPANSION UOC: EMK, YNN	1	
7	PAOZZ				30554	98-2059-4	..HOSE, PREFORMED, 90 D, 24 IN. L UOC: EMK, YNN	1	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

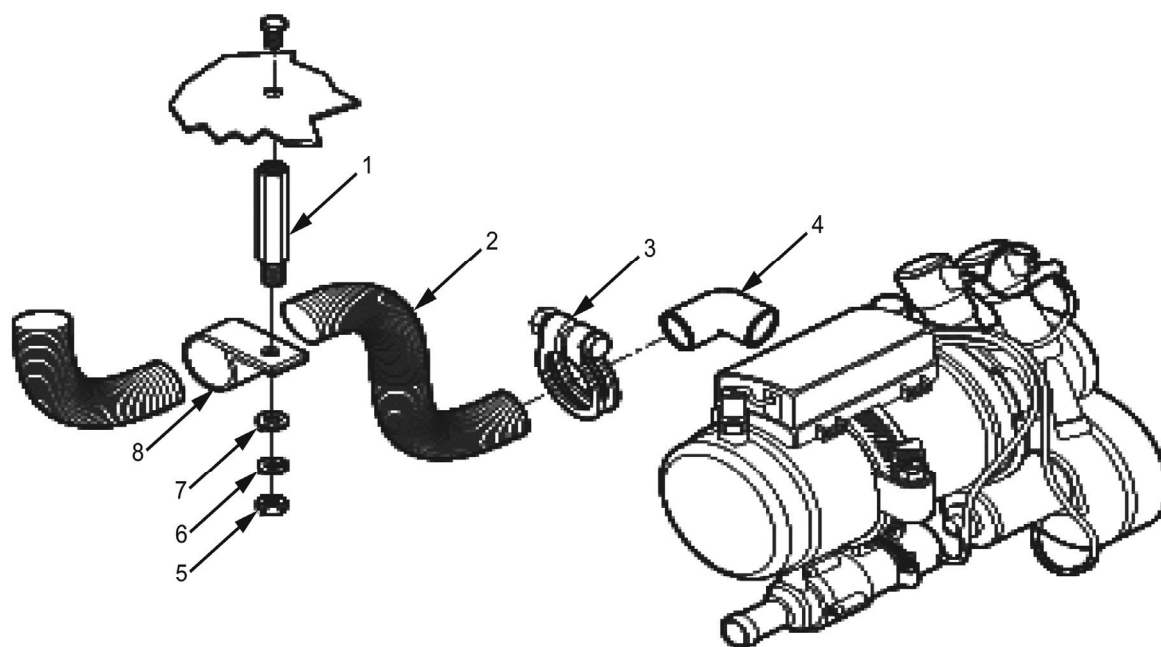


Figure 32. Exhaust Hoses and Heater Brace.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
	ARMY	AIR FORCE	NAVY	USMC					
GROUP 14 - WINTERIZATION KIT									
FIG. 32 EXHAUST HOSES AND HEATER BRACE									
1	XBOZZ				30554	96-23615	..STANDOFF, MALE-FEMALE UOC: EMK, YNN	1	
2	XBOZZ				30554	98-2019-2	..HOSE METALLIC, 30 IN. L UOC: EMK, YNN	1	
3	XBOZZ				30554	98-2008-4	..CLAMP, LOOP UOC: EMK, YNN	1	
4	XBOZZ				30554	98-2024-5	..ELBOW, 90 DEGREE UOC: EMK, YNN	1	
5	XBOZZ				97403	13218E0320-49	..NUT, PLAIN, HEX UOC: EMK, YNN	1	
6	XBOZZ				30554	88-20556-4	..WASHER, LOCK UOC: EMK, YNN	1	
7	XBOZZ				30554	88-20033-10A	..WASHER, FLAT UOC: EMK, YNN	1	
8	XBOZZ				30554	98-2017-3	..CLAMP, LOOP UOC: EMK, YNN	1	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)


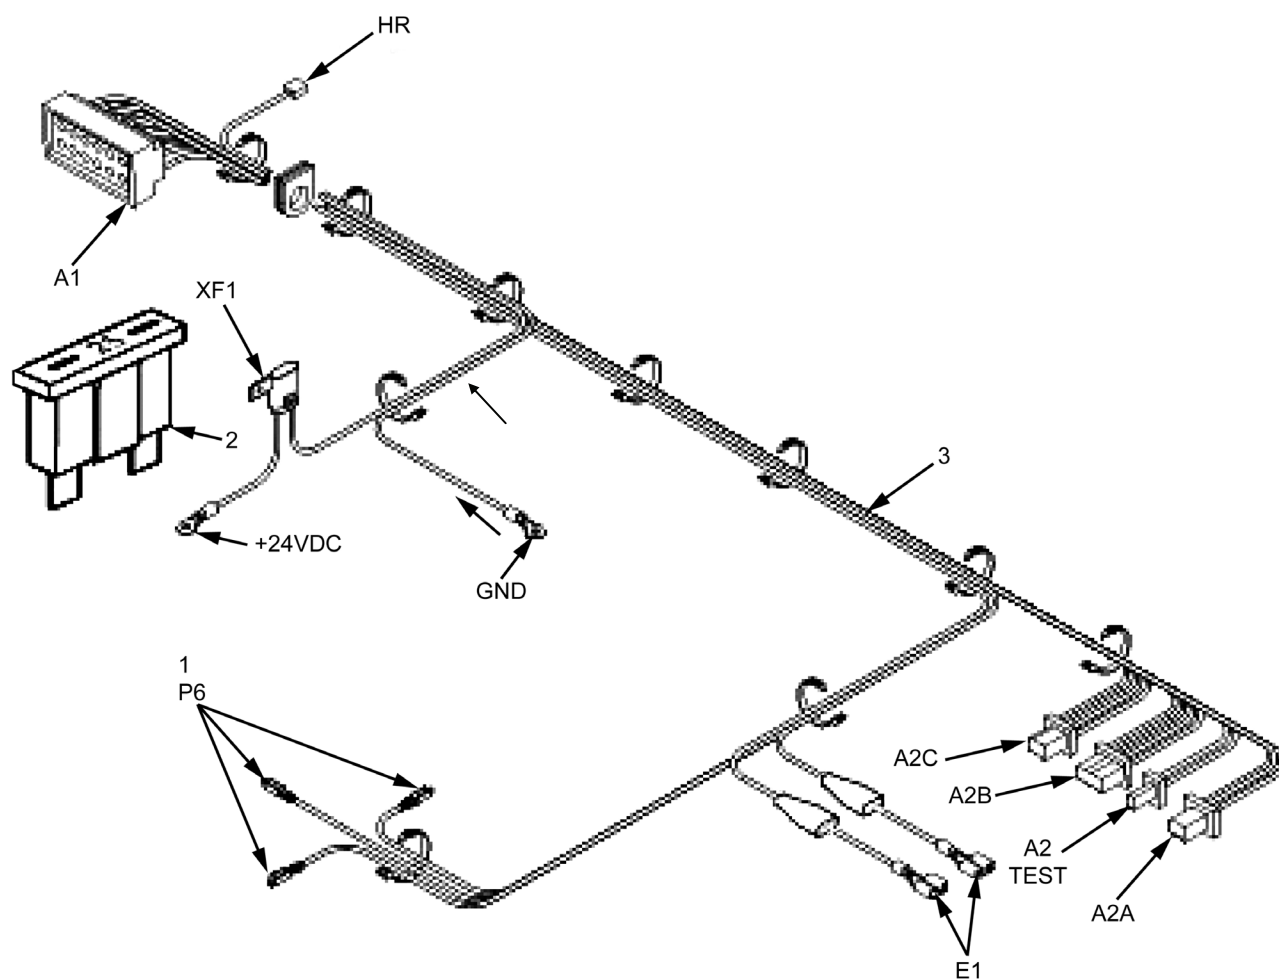


Figure 33. Wiring Harness, J1.

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
	ARMY	AIR FORCE	NAVY	USMC					
GROUP 14 - WINTERIZATION KIT									
FIG. 33 WIRING HARNESS									
1	XBOZZ				30554	88-21942	..CONNECTOR, P6 UOC: EMK, YNN	3	
2	PAOZZ				58536	AA55569/02-009	..FUSE, INCLOSED, LINK UOC: EMK, YNN	1	
3	PAOOO				30554	98-2018-1	.WIRING HARNESS UOC: EMK, YNN	REF	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

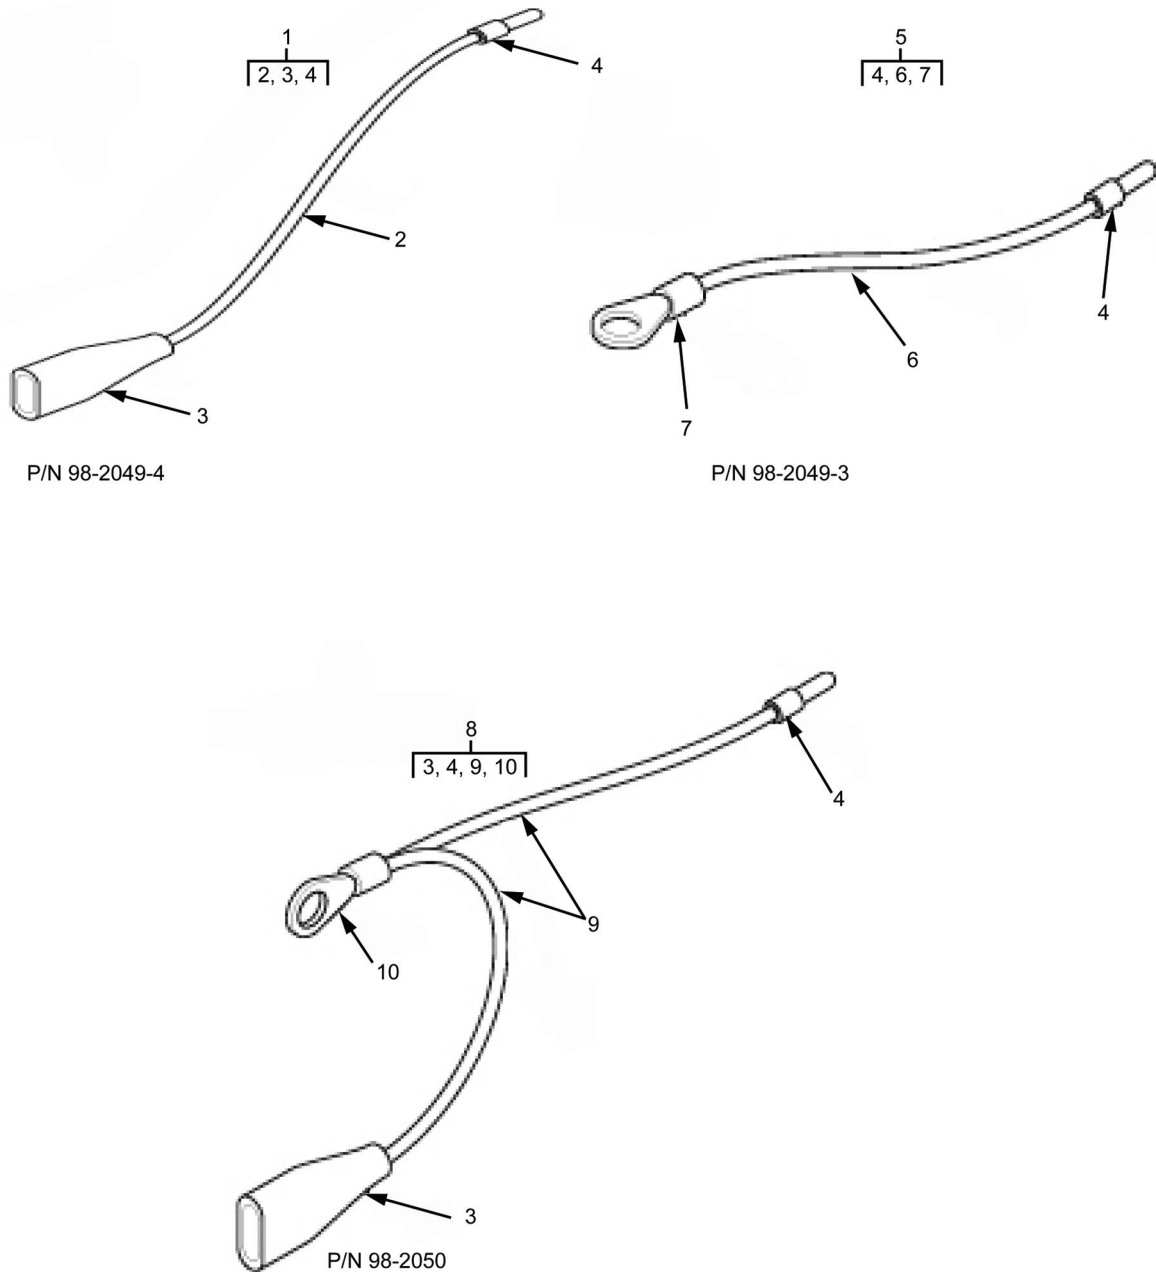

PART NUMBER	TERMINATION		TERMINATION		WIRE FIND#	DIMENSION
	<u>FROM</u>	<u>FIND #</u>	<u>TO</u>	<u>FIND#</u>		
98-2049-4	J6-17	4	DS1-	3	2	44"
98-2049-3	J6-16	4	S1-2	7	6	44"
98-2050	J6-24	4	S1-3	10	9	44"
	DS1+	3	S1-3	10	9	5"

Figure 34. Electrical Leads (Sheet 1 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

<u>WIRE NO.</u>	<u>TERMINATION</u>		<u>TERMINATION</u>		<u>WIRE AWG.</u>
	<u>FROM</u>	<u>ITEM NAME</u>	<u>TO</u>	<u>ITEM NAME</u>	
1	A1-1	Heater Assembly	A2C-2	Control Unit	18
2	A1-2	Heater Assembly	GND	—	18
3	A1-3	Heater Assembly	GND	—	18
4	A1-4	Heater Assembly	A2C-5	Control Unit	18
5	A1-6	Heater Assembly	A2C-5	Control Unit	18
6	A1-5	Heater Assembly	A2C-1	Control Unit	18
7	A1-7	Heater Assembly	A2A-1	Control Unit	18
8	A1-8	Heater Assembly	A2A-1	Control Unit	18
9	A1-9	Heater Assembly	A2A-3	Control Unit	18
10	A1-10	Heater Assembly	A2A-5	Control Unit	18
11	A1-11	Heater Assembly	A2B-1	Control Unit	18
12	A1-12	Heater Assembly	A2B-2	Control Unit	18
13	E1-1	Fuel Pump	A2B-2	Control Unit	18
14	E1-2	Fuel Pump	A2A-4	Control Unit	18
15	HR-1	Glow Plug	GND	—	10
16	HR-2	Glow Plug	A2C-3	Control Unit	10
17	A2TEST-T	Control Unit	P6-17	Heater Switch	18
18	A2TEST-S	Control Unit	P6-24	Heater Switch	18
19	A2C-6	Control Unit	P6-16	Heater Switch	18
20	A2C-6	Control Unit	A2C-4	Control Unit	18
21	XF1-2	Fuse	A2C-4	Control Unit	10
22	XF1-1	Fuse	+24 VDC	—	10
23	E1-2	Fuel Pump	GND	—	18

Figure 34. Electrical Leads (Sheet 2 of 2).

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2)				(3)	(4)	(5)	(6)	(7)
ITEM NO.	SMR CODE				FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
	a.	b.	c.	d.					
	ARMY	AIR FORCE	NAVY	USMC					
GROUP 14 - WINTERIZATION KIT									
FIG. 34 ELECTRICAL LEADS									
1	MOOOO				30554	98-2049-4	.LEAD, ELECTRICAL UOC: EMK, YNN	1	
2	XBOZZ				30554	88-20540-2	..WIRE, ELECTRICAL MAKE FROM P/N M5086/2-20-9 (30554), 44 INCHES REQUIRED UOC: EMK, YNN	AR	
3	XBOZZ				30554	95-8105-2	..TERMINAL, QUICK DISC UOC: EMK, YNN	2	
4	XBOZZ				30554	88-21941	..PIN UOC: EMK, YNN	3	
5	MOOOO				30554	98-2049-3	.LEAD, ELECTRICAL UOC: EMK, YNN	1	
6	XBOZZ				30554	88-20540-2	..WIRE, ELECTRICAL MAKE FROM M5086/2-20-9 (30554), 44 INCHES REQUIRED UOC: EMK, YNN	AR	
7	XBOZZ				97403	13226E0107-3	..TERMINAL, LUG UOC: EMK, YNN	1	
8	MOOOO				30554	98-2050	.LEAD, ELECTRICAL UOC: EMK, YNN	1	
9	XBOZZ				30554	88-20540-2	..WIRE, ELECTRICAL MAKE FROM M5086/2-20-9 (30554), 5 INCHES REQUIRED UOC: EMK, YNN	AR	
10	XBOZZ				97403	13226E0107-11	..TERMINAL, LUG UOC: EMK, YNN	1	
END OF FIGURE									

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1)	(2) SMR CODE				(3)	(4)	(5)	(6)	(7)
ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	FSCM	PART NUMBER	DESCRIPTION AND USABLE ON CODE (UOC)	QTY	USMC QTY PER EQUIP
GROUP 15 - BULK ITEMS									
FIG. BULK									
1	PAOZZ	PAOZZ			16428	8407	.CABLE, POWER, ELECTRIC	1	
2	PAFZZ	PAOZZ			81349	M27500-16T E2T14	.CABLE, POWER, ELECTRIC	1	
3	PAFZZ	PAOZZ			81349	M27500-16T E1T14	.CABLE, POWER, ELECTRIC	1	
4	PAFZZ	PAOZZ			81349	M27500-20T E2T14	.CABLE, SPECIAL PURPOSE	1	
5	PAFZZ	PAOZZ			81349	M27500-20T E3T14	.CABLE, SPECIAL PURPOSE	1	
6	PAOZZ	PAOZZ			80244	RR-C-271 TY2CL6	.CHAIN, WELDLESS	1	
7	NOT USED								
8	PAOZZ	PAOZZ			81348	RR-C-271 TY2 CL7-16	.CHAIN, WELDLESS	1	
9	PAOZZ	PAOZZ			30554	88-20543-2	.GROMMET, NONMETALLIC	1	
10	PAOZZ	PAOZZ			03007	Z60960	.HINGE, ACCESS DOOR 72 INCHES LONG	1	
11	PAOZZ	PAOZZ			03007	AA07060408	.HINGE, BUTT	1	
12	PAOZZ	PAOZZ			03007	AA06060406	.HINGE, BUTT	1	
13	PAOZZ	PAOZZ			96906	MS521302A1 01360	.HOSE, NONMETALLIC	1	
14	PAOZZ	PAOZZ			81349	100R1A-16	.HOSE, NONMETALLIC	1	
15	PAOZZ	PAOZZ			00624	303-5	.HOSE, NONMETALLIC	1	
16	PAOZZ	PAOZZ			30554	88-20579-3	.HOSE, NONMETALLIC	1	
17	PAOZZ	PAOZZ			81349	100R1AT-16	.HOSE, NONMETALLIC	1	
18	PAOZZ	PAOZZ			81349	M23053/5- 110-9	.INSULATION SLEEVING	1	
19	PAOZZ	PAOZZ			81349	M23053/5- 110-2	.INSULATION SLEEVING	1	
20	PAOZZ	PAOZZ			81349	M23053/5- 105-0	.INSULATION SLEEVING	1	
21	PAOZZ	PAOZZ			81349	M23053/5- 104-0	.INSULATION SLEEVING	1	
22	PAOZZ	PAOZZ			81349	M23053/5- 108-9	.INSULATION SLEEVING	1	
23	PAOZZ	PAOZZ			81349	M23053/5- 105-9	.INSULATION SLEEVING	1	
24	PAFZZ	PAOZZ			81349	M3190/03-17-0	.INSULATION, SLEEVING	1	
25	PAOZZ	PAOZZ			57137	62-B7-1/16	.NONMETALLIC CHANNEL	1	
26	PAOZZ	PAOZZ			72205	1-4INDIA	.ROPE, FIBROUS	1	

SECTION II. REPAIR PARTS LIST (CONTINUED)

(1) ITEM NO.	(2) SMR CODE				(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY	(7) USMC QTY PER EQUIP
	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC					
27	PAOZZ	PAOZZ			81349	MIL-R-6130 TYII/GRA	.RUBBER STRIP	1	
28	MOOZZ	MOO			1X968	ZX-4134	.SEAL, NONMETALLIC	1	
29	PAOZZ	PAOZZ			30554	88-22705	.SEAL, NONMETALLIC SP	1	
30	PAOZZ	PAOZZ			30554	88-22708	.SEAL, NONMETALLIC SP	1	
31	NOT USED								
32	PAOZZ	PAOZZ			30554	88-22712	.SEAL, PLAIN	1	
33	PAOZZ	PAOZZ			99739	6130TZS-S1 SXPSA1S.75 X1.00	.SEAL, PLAIN	1	
34	PAOZZ	PAOZZ			28818	FF40JM02	.SOUND CONTROLLING B 24 X 54 INCHES	1	
35	PAFZZ	PAOZZ			30554	88-20444-2	.WIRE, ELECTRICAL 14 GA	1	
36	PAOZZ	PAOZZ			81343	SAE-J1127	.WIRE, ELECTRICAL	1	
37	PAOZZ	PAOZZ			81349	M5086/2-20-9	.WIRE, ELECTRICAL	1	
38	PAOZZ	PAOZZ			81349	M5086/2-16-9	.WIRE, ELECTRICAL	1	
39	PAOZZ	PAOZZ			81349	M5086/2-8-9	.WIRE, ELECTRICAL	1	
40	PAOZZ	PAOZZ			81349	M5086/2-10-9	.WIRE, ELECTRICAL	1	
41	PAOZZ	PAOZZ			81349	M5086/2-2-9	.WIRE, ELECTRICAL	1	
42	PAOZZ	PAOZZ			30554	88-20579-4	.HOSE, NONMETALLIC	1	
43	PAOZZ	PAOZZ			30554	88-20579-6	.HOSE, NONMETALLIC	1	
44	PAOZZ	PAOZZ			30554	88-20579-7	.HOSE, NONMETALLIC	1	
45	PAOZZ	PAOZZ			18565	14-1214-0605- 06CV	.SHIELDING, CABLE	1	
46	PAOZZ	PAOZZ			18565	14-1214-1602- 00CV	.SHIELDING, CABLE	1	
47	PAOZZ	PAOZZ			18565	14-1214-0403- 00CV	.SHIELDING, CABLE	1	

END OF FIGURE

SECTION III. SPECIAL TOOLS GROUP

Special Tools Group

NOT APPLICABLE

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
6625-00-003-0975	6	37	5925-00-068-3931	7	9
6625-00-004-8066	6	36	5305-00-071-1319	6	9
5310-00-011-5093	1	25	5305-00-071-2066	23	17
	12	30	5305-00-071-2075	23	16
	20	2		23.1	4
	24	2	5305-00-071-2236	3	41
5310-00-011-6120	13	51	5975-00-074-2072	7	82
	21	15		8	13
5310-00-011-6121	22	19		12	48
	23	18		13	24
5306-00-017-6143	22	63		13	59
4720-00-021-3320	13	85		13	68
4730-00-024-3971	13	75		13.1	9
5305-00-036-6902	16	39		15	26
5305-00-036-6972	2	2		18	12
	7	18		18	43
	19.1	16		18	78
5305-00-038-3103	4	30	5325-00-074-3301	BULK	9
	7	44	5330-00-079-7840	7	80
5305-00-038-3145	7	33	6625-00-081-5840	6	36
4730-00-041-2526	13	37	5310-00-081-8087	7	24
5310-00-044-6477	13	53	5970-00-082-3942	BULK	23
5306-00-050-0347	21	50	5970-00-082-3948	BULK	22
5340-00-050-2740	9	18	5310-00-087-7493	21	45
5310-00-052-3632	4	31		22	57
	7	27	4730-00-089-2515	10.1	1
	9	1	5925-00-089-3031	7	8
	16	38	6645-00-089-8842	6	33
5340-00-053-8994	18	23	5975-00-111-3208	7	21
5340-00-057-3026	18	35		8	12
5305-00-059-4568	3	25		15	25
5310-00-063-7360	2	1	5940-00-113-0954	21	8
	6	8		22	13
	7	17	5940-00-113-3140	16	66
	9	22	5940-00-113-8183	15	20
	19.1	26	5940-00-113-8184	8	3
4730-00-063-7919	13	31		15	9
5305-00-068-0500	21	2	5940-00-113-8185	15	49
	22	6	5940-00-113-8191	16	4
	22	31		16	8
5305-00-068-0501	22	26		16	12
5305-00-068-0502	21	9		16	15
	22	14	5940-00-113-9820	21	7
5305-00-068-0508	12	17		22	12
	13	96	5940-00-113-9828	8	9
5305-00-068-0509	12	33	5940-00-113-9831	16	16
	17	32		16	20
5305-00-068-0510	20	15		16	24
	23	21		16	28
	23.1	26	5940-00-114-1300	21	37
	24	4	5940-00-114-1305	15	6B
5305-00-068-0511	20	4	5940-00-114-1306	15	14

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
5940-00-114-1314	15	6A	5920-00-243-3787	7	93
5940-00-115-0763	15	13	5305-00-253-5615	21	53
5940-00-115-2677	9	6		22	66
	17	2	5975-00-257-8055	4	19
2590-00-141-9758	13	1	5305-00-269-2801	21	44
5940-00-143-4793	15	6		22	56
5940-00-143-4771	6	12	5305-00-269-3233	1	24
	15	12	5305-00-269-3239	21	46
	15	58		22	58
5940-00-143-4773	15	5	5310-00-274-8710	2	6
5940-00-143-4774	15	17		3	2
5940-00-143-4777	22	49		4	14
5940-00-143-4780	15	21		5	4
	15	57		7	90
5940-00-143-4794	15	10		13	56
5305-00-150-3408	7	23	5310-00-274-8715	2	19
5961-00-154-7046	22	35		3	29
3110-00-155-6298	22	25		4	8
6240-00-155-7878	6	1		10	5
5325-00-174-9038	12	6		11	8
4730-00-177-6166	13	36		12	26
4730-00-187-0840	13.1	11		13	19
	13	17		17	33
5310-00-189-8467	17	39		18	25
5305-00-191-6226	16	31		21	10
4730-00-200-0531	13	42		22	3
5310-00-205-9951	17	30		22	27
5310-00-208-9255	18	55		23	6
5305-00-211-9344	2	58	5305-00-282-3249	22	61
5305-00-218-4864	7	56	5940-00-283-5280	15	68
	7	88		34	10
5305-00-224-1092	7	63	5940-00-283-5281	8	4A
	7	76		15	48
	16	61		15	13A
5305-00-225-3843	12	55	6145-00-284-0657	15	22
	13	81		BULK	39
5306-00-225-8499	21	14	4730-00-287-3281	18	36
5305-00-225-8507	21	42	5325-00-290-1960	16	48
	22	54	5305-00-292-4562	21	17
5306-00-226-4827	13	52	5961-00-295-5757	6	14
	19.1	10		7	69
5315-00-227-6415	21	39		8	36
	22	51	5340-00-297-0312	3	34
5940-00-230-0515	8	87		4	11
	8	102		17	36
	8	133	5935-00-315-9563	13	69
	22	32		15	41
5935-00-233-3990	7	83	5325-00-351-4543	16	47
4730-00-235-4066	32	4	5940-00-411-5913	34	3
4720-00-235-4131	BULK	44	5975-00-417-0543	7	19
4030-00-236-0843	12	10	5945-00-458-3351	7	37

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
5310-00-465-2719	17	9	5305-00-724-7265	20	8
5940-00-478-0037	7	95	5305-00-725-2317	23	3
5961-00-478-7687	21	31	4730-00-725-3664	13.1	13
5935-00-482-7721	18	45	5975-00-727-5153	13	67
	18	80	5310-00-761-6882	18	24
5935-00-483-0259	13	61		22	2
	13	70		22	29
5306-00-484-5730	13	20	5310-00-763-8920	22	64
5940-00-504-4703	15	18	5310-00-764-6609	20	10
4020-00-523-9641	BULK	26	4730-00-765-9103	13	49
5310-00-533-2743	26	4	5310-00-768-0318	21	51
	28	14	4030-00-780-9350	9	5
	30	5	4730-00-802-2560	13	5
	32	5	5365-00-803-7304	21	22
5905-00-539-2479	7	1	5365-00-804-7654	22	47
5905-00-539-2573	6	20	5310-00-809-4058	12.1	5
5920-00-539-6920	7	9	5310-00-811-3494	12	35
5305-00-543-4372	17	28	4730-00-812-1333	13	22
5940-00-549-6581	1	2	5970-00-812-2969	8	37
5940-00-549-6583	1	1		BULK	21
5310-00-550-1130	22	30	4730-00-812-7999	13	79
5340-00-550-5943	32	8	5940-00-813-0698	15	16
5905-00-556-5306	6	27		34	7
5940-00-557-1629	8	8	5970-00-822-2775	BULK	18
	8	109	5310-00-822-8525	2	37
5310-00-559-0070	22	38		9	8
5355-00-559-8943	6	10	5935-00-823-5322	8	30
5935-00-565-9503	7	86	6210-00-831-8247	6	4
6145-00-567-7412	BULK	1	5310-00-836-3520	7	62
5310-00-576-5752	21	24		7	75
6145-00-578-6596	BULK	41		8	20
6145-00-578-6605	8	18		15	28
	15	37		16	60
	BULK	38	5315-00-847-3531	22	48
6145-00-578-7513	15	24	6145-00-851-8505	8	15
	BULK	40		15	35
6145-00-578-7514	8	33		34	2
	15	23		34	6
5940-00-581-4325	1	28		34	9
6210-00-583-9349	6	7		BULK	37
5940-00-606-4970	16	57	5935-00-852-9611	8	32
4730-00-613-6468	13	48		15	91
5940-00-615-6073	8	157	5945-00-855-7478	18	3
5930-00-615-6731	6	23	6625-00-869-3141	6	34
4730-00-620-6904	13	46	6625-00-869-3144	6	29
5365-00-663-2125	7	85	5975-00-878-3791	3	40
4720-00-670-6037	BULK	43	5920-00-892-9311	7	10
5940-00-682-2445	15	15	4730-00-900-8663	19	8
5330-00-684-7851	13	2	5310-00-903-8595	3	7
5310-00-696-5173	12.1	4		4	12
5340-00-724-7038	9	17		9	13
	16	42	4730-00-908-3194	19	2

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
4730-00-908-3195	12	4		9	29
	13	11	5935-01-020-4094	15	92
5310-00-913-8881	1	18	5935-01-023-5445	15	34
5330-00-914-7651	7	79	5999-01-039-8438	13	73
5310-00-929-1807	16	68		15	40
5320-00-932-1972	18	30		15	87
	27	2	5935-01-044-8382	1	39
5310-00-934-9757	22	37	4730-01-051-9840	13.1	6
6210-00-935-6919	6	2	5305-01-056-1501	4	17
5975-00-944-1499	8	14		11	9
	15	27		12	27
5970-00-954-1622	BULK	20		23	7
5940-00-954-3558	7	71	5905-01-063-9644	17	45
5305-00-954-5629	9	2	5961-01-067-9493	22	34
5305-00-954-5638	9	33	5340-01-071-8006	11	14
4010-00-958-0633	BULK	8	5340-01-074-8126	11	12
5940-00-958-1214	17	40	5980-01-076-8659	6	5
5970-00-978-7677	BULK	19	5342-01-078-9038	7	38
5305-00-983-7449	20	1		7	40
5310-00-984-3806	21	41	5305-01-080-5721	22	21
	22	53	5940-01-082-3321	15	59
5305-00-984-6189	21	28		15	77
5305-00-984-6196	22	36		17	11
5305-00-988-1727	22	42		17	15
5305-00-988-1728	22	4		17	19
5310-00-988-2652	18	60		17	23
5305-00-993-1849	21	29	5340-01-086-2049	13	86
4730-00-995-1559	13	41	5999-01-092-2655	8	206
5940-01-003-8579	16	56		13	60
	17	41		13	72
5935-01-012-1273	15	42		18	44
	15	42A		18	79
5310-01-012-3595	1	37	5310-01-099-9532	10.1	5
	2	8		12	61
	3	10		12.1	10
	4	1		18	71
	5	1		19.1	13
	7	92		23	10
	9	11		23.1	8
	12	7	5935-01-101-7828	15	33
	13	7	5935-01-102-0366	8	27
	14	1	5935-01-102-7124	8	31
	16	30	2940-01-103-3267	11	18
	17	5	2940-01-103-3268	11	17
	18	1	5310-01-103-6042	2	20
5961-01-013-0682	21	32		3	32
5935-01-014-4920	15	30		10	7
5935-01-014-7861	8	25		11	10
5320-01-019-5694	2	64		12	28
	3	45		13	21
	4	27		16	50

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
	16	69		13	8
	17	34		14	2
	18	27		16	44
	23	8		17	6
6145-01-104-5076	BULK	3		18	2
5935-01-104-6137	8	26		26	1
5930-01-107-6474	18	8		28	11
	19.1	19		30	1
5340-01-107-7559	6	28	5340-01-157-9475	4	18
5940-01-110-6423	7	26	5325-01-161-2654	9	10
	8	6	5305-01-165-1254	13	55
	8	62	5999-01-170-0558	15	31
	8	69		15	67
	8	77		15	76
	8	84		15	86
	8	92		33	1
	8	99	5306-01-174-8738	18	76
	8	107		19.1	22
	8	114		23.1	16
	8	122	5935-01-175-8419	7	54
	8	140		16	63
	8	148	5306-01-179-1438	10.1	4
	8	158		12.1	11
	8	167		18	70
	8	177		19.1	12
	8	199		23.1	10
	8	210	5310-01-183-5529	17	8
	15	8	5305-01-187-5878	7	14
5940-01-112-9746	15	11		7	74
	18	17	5305-01-187-5878	16	43
5935-01-114-5354	7	39	5310-01-190-4614	11	16
4730-01-123-8618	13	29	5310-01-195-6611	18	38
4730-01-126-2173	13	87		18	67
5940-01-126-3973	18	18	5980-01-198-6311	6	6
6145-01-128-2979	BULK	5	5305-01-204-4683	7	77
6145-01-129-9955	BULK	4	6145-01-213-5495	BULK	2
4730-01-134-9827	13	6	4720-01-215-0816	13	89
5940-01-135-7081	8	41	5310-01-215-7311	20	5
	8	48		21	3
	8	55	5310-01-220-6513	18	41
	8	197	5340-01-222-4225	16	49
5940-01-136-0953	8	187	5310-01-231-7459	23	13
5940-01-139-0853	15	78	5310-01-234-9415	3	31
5306-01-156-7663	1	38		19.1	27
	2	9	5310-01-234-9416	2	7
	3	6		3	3
	4	2		4	15
	5	2		5	5
	7	28		7	29
	7	89		13	57
	9	12		16	32
	12	8	5315-01-236-0612	21	36

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
4730-01-236-1186	18	14	5305-01-365-6314	17	44
5905-01-236-4041	6	27	5905-01-365-6585	7	65
5310-01-242-2679	20	6	5310-01-365-8139	20	7
5961-01-248-1712	21	25	5305-01-365-9390	7	70
5310-01-257-7590	1	19	5930-01-365-9613	7	7
	10	11	5930-01-365-9614	18	29
	12	45		18	61
	18	59	5925-01-365-9757	7	22
	23	2	5945-01-365-9953	16	37
	24	3	5945-01-365-9954	7	42
5940-01-259-2190	7	25	5930-01-366-0048	6	26
	8	11		27	7
	8	216	6625-01-366-0192	6	35
5310-01-266-4641	23	14	6625-01-366-0193	6	30
	23.1	22	5999-01-366-2621	7	59
5310-01-267-1685	13	4		8	16
5970-01-280-0362	7	41		15	38
5305-01-283-8664	22	18	5945-01-366-2725	7	35
5310-01-289-7716	16	55	5945-01-366-2726	7	36
4720-01-293-4415	28	8	5945-01-366-2727	7	48
2920-01-298-6321	22	28	5945-01-366-2728	7	49
5325-01-301-7903	2	39	5330-01-366-2836	13	65
	9	16	5340-01-366-3360	20	12
5340-01-302-2960	21	27	5305-01-366-3501	20	11
	22	39	5310-01-366-3539	10	9
3110-01-304-8142	21	21	5310-01-366-3540	18	51
5310-01-307-7914	6	38	5320-01-366-4394	3	23
4730-01-309-6370	13	95		4	3
5935-01-312-7038	8	22	5310-01-366-4412	16	54
5999-01-320-7853	8	34		17	29
5305-01-324-4896	21	23	5306-01-366-4527	1	21
2930-01-329-4857	21	40	5999-01-366-5119	8	23
	22	52		8	169
5305-01-334-8683	2	48		8	180
	16	59		8	201
5905-01-336-7533	7	6		34	4
4730-01-343-3192	13	28	4720-01-366-6257	11	5
5910-01-343-8827	16	67	5330-01-366-6589	18	47
2815-01-350-2207	23	12	5315-01-366-6685	18	57
6110-01-363-0493	7	55	5905-01-366-7074	7	67
2910-01-364-9843	13	84	5306-01-366-7075	3	33
	13.1	8		4	7
5310-01-365-3190	23	15		18	26
	23.1	21	4720-01-366-7172	13	40
5310-01-365-4381	9	9	5999-01-366-7952	15	32
5310-01-365-4386	20	9		15	46
4010-01-365-6107	BULK	6		15	56
5305-01-365-6313	2	5		15	66
	3	1		15	75
	4	13		15	85
	5	3	5310-01-366-8134	7	16

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
4730-01-366-9017	18	9	6110-01-368-7123	7	55
5935-01-366-9934	8	35	2910-01-368-7644	7	50
5970-01-367-0730	BULK	24	6625-01-368-7973	6	35
5340-01-367-1503	10	1	5306-01-368-8041	2	55
4820-01-367-1836	18	11	5945-01-369-0791	7	42
	19.1	21	2990-01-369-2079	10	3
5340-01-367-2287	18	39	5305-01-369-2166	10.1	13
5305-01-367-2314	8	21		12.1	17
	15	29		12.1	26
5340-01-367-2328	18	54		13.1	3
5935-01-367-4422	8	28		23.1	28
5330-01-367-6329	BULK	29	5940-01-369-2268	1	33
5340-01-367-6703	BULK	11	5940-01-369-2270	8	5
5340-01-367-6704	BULK	12		8	72
5935-01-367-7814	7	20		8	134
6625-01-367-8436	7	60		8	170
6110-01-367-8921	16	36		8	188
5340-01-367-8956	3	4		15	4
5940-01-367-9569	8	7	5940-01-369-2271	16	3
	8	71		16	7
	8	86		16	11
	8	132		16	19
	15	7		16	23
6695-01-367-9722	7	47		16	27
6695-01-367-9723	18	19	5940-01-369-2872	1	4
2930-01-368-1071	12	46		1	8
6620-01-368-1531	6	32		1	13
5905-01-368-2538	7	64		1	27
5905-01-368-2539	7	66		1	32
5905-01-368-2540	7	68	5940-01-369-2877	16	53
5930-01-368-2891	6	22	2910-01-369-5012	13	63
5930-01-368-2892	7	2	6685-01-369-6549	6	31
5930-01-368-2893	6	24	5940-01-369-6948	15	19
5950-01-368-2915	16	33		15	47
5950-01-368-3006	16	35		17	12
5310-01-368-3048	10	10		17	16
	18	6		17	20
	18	22		17	24
	18	34	5330-01-369-7318	22	23
	19.1	23	5330-01-369-8947	BULK	28
	20	18	6695-01-369-9312	7	31
	23.1	11	2930-01-370-2868	12	63
	23.1	17	5950-01-370-3328	16	35
5310-01-368-3049	18	52	4730-01-370-5426	12	16
5360-01-368-4663	18	58	2910-01-371-2689	18	46
5930-01-368-5160	6	15	2910-01-371-4356	7	50
4720-01-368-5430	12	15	6110-01-372-2597	16	62
5330-01-368-5932	10	13	9905-01-372-7986	9	31
5340-01-368-6048	2	35	5120-01-373-8976	17	4
5340-01-368-6063	12	12	4720-01-374-0783	12	2
5940-01-368-6774	8	10	5307-01-374-4451	2	38
6695-01-368-7114	7	31	5330-01-374-4468	21	19

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
2990-01-374-9149	10	12	5340-01-392-8822	2	36
4720-01-375-1391	13	30	5905-01-392-8825	18	15
4720-01-375-1929	11	3	5330-01-392-8826	18	50
2910-01-376-2268	13	62	4710-01-392-8846	11	4
4730-01-376-4256	13	74	5305-01-392-8847	18	68
9905-01-377-5094	4	28	4720-01-393-5581	BULK	13
5930-01-377-9113	18	32	5915-01-394-0942	17	48
4730-01-378-5224	12	22	4720-01-394-1931	13	39
5930-01-378-6921	18	10	9320-01-394-8045	BULK	27
	19.1	18	5340-01-396-0454	2	59
5340-01-379-0688	BULK	10	5920-01-396-1989	7	94
5340-01-379-0893	2	15	5310-01-396-5836	3	26
5305-01-379-5734	13.1	7	5915-01-396-9253	17	47
	23.1	14	6110-01-397-2108	5	6
6110-01-379-7187	7	55	5305-01-406-1192	2	49
5305-01-380-3395	12	60	5310-01-406-1672	2	45
	18	5	6150-01-406-9533	7	81
	18	21	4730-01-407-0649	13	93
5365-01-381-3773	12	47	6150-01-407-8102	15	1
4820-01-381-5079	12	24		16	70
	12.1	20	9390-01-408-1672	BULK	25
5925-01-381-5199	7	22	5920-01-414-6436	33	2
6625-01-381-7445	7	30	4730-01-417-5855	19.1	2
6625-01-381-8195	7	34	6140-01-418-6342	1	7
5340-01-382-2589	21	13	6145-01-422-4370	BULK	36
5950-01-382-3371	16	34	6145-01-422-8602	BULK	35
5999-01-382-8223	1	17	5305-01-423-8236	18	33
5935-01-383-2612	8	29	5940-01-425-2020	8	2
6115-01-383-3124	21	1		8	2
6110-01-383-4531	5	6		8	40
6150-01-383-6511	7	96		8	47
	8	1		8	54
6150-01-384-0013	7	96		8	64
	8	1		8	79
5940-01-384-0384	16	51		8	94
5910-01-384-1745	16	65		8	101
5330-01-384-1755	BULK	33		8	116
5330-01-384-3057	BULK	32		8	124
5365-01-384-9169	20	3		8	142
	21	47		8	150
	22	59		8	159
4720-01-385-1102	12	14		8	178
5930-01-385-1894	6	25		8	186
6115-01-385-3104	22	22		8	200
5640-01-386-9618	BULK	34		8	212
2920-01-388-2776	4	20		15	2
2910-01-388-6383	13	76	5365-01-431-4540	2	46
2990-01-389-3003	3	5	5365-01-431-4603	2	47
2990-01-390-4457	10	8	6115-01-434-1432	22	1
4720-01-392-0319	13	15	6140-01-446-9498	1	22
6680-01-392-8821	13	66	6140-01-457-4339	1	22

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
5305-01-458-1624	12	29		19.1	3
5905-01-463-0058	17	22	4730-01-470-1701	13	14
5999-01-463-4017	8	24	4730-01-470-1982	19	6
	8	61	4730-01-470-2409	19.1	1
	8	131	5940-01-470-2470	15	36
	8	168	5940-01-470-2768	16	41
	8	179	5310-01-470-2776	23.1	23
	8	196	5340-01-470-2973	7	45
3030-01-463-9774	12	53	5940-01-470-3031	16	40
5305-01-464-6667	2	13	4720-01-470-3929	BULK	16
5340-01-465-7761	13	9	5961-01-470-4673	6	11
5340-01-465-7765	13	10	5340-01-470-5184	32	1
6240-01-466-3528	6	3	4730-01-470-6199	28	10
5305-01-466-4406	12	34	4720-01-470-6230	BULK	42
5310-01-466-6312	2	18	5310-01-470-6529	23.1	24
	3	28	4020-01-470-6597	17	1
	4	16	4730-01-474-2274	13	35
	10	4	4930-01-475-0388	13	44
	11	7	5340-01-476-5376	18	40
	12	25	6115-01-477-0566	25	6
	13	18	5310-01-477-9621	19.1	28
	23	5	5940-01-478-1154	15	39
	23.1	1	4820-01-480-0846	13	43
5310-01-466-6687	12	44	6160-01-480-5918	1	20
	12.1	15	2915-01-482-8924	25	1
	24	1		26	5
5310-01-466-7247	16	52	2990-01-483-4051	25	3
	17	26		29	5
5310-01-466-7321	17	27	2910-01-483-4069	25	4
	18	69		28	4
5915-01-466-8148	17	48	5915-01-488-5004	17	47
5925-01-466-8153	7	22	5925-01-493-9106	7	22
2930-01-466-8474	12	39	5310-01-494-2731	22	33
4140-01-466-8879	12	43	6150-01-494-3982	1	26
5305-01-466-9756	2	23	6150-01-494-3983	1	12
5305-01-467-1561	9	23	6150-01-494-3984	1	3
5342-01-467-4366	23	22	6150-01-494-3985	1	31
	23.1	20	6150-01-496-7717	25	2
9390-01-470-1205	12	58		33	3
5310-01-470-1286	13	50	5930-01-499-3684	6	21
	19.1	29	5310-01-500-7620	18	20
4730-01-470-1423	11	2	4140-01-507-4174	12	59
4730-01-470-1567	10.1	9	4140-01-507-4176	12	54
	12	13	5340-01-528-8654	4	25
	12.1	24	5340-01-528-9207	2	17
	19.1	17	5305-01-531-4346	2	21
4730-01-470-1578	10	2		3	30
	13	13		10	6
4730-01-470-1595	10.1	7	4730-01-531-4884	12	21
	11	1	2940-01-531-4912	11	6
	12	1	5310-01-531-4937	10.1	6
4730-01-470-1626	13.1	5		12.1	9

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
	18	72		28	12
	19.1	14		30	3
	23.1	7		32	7
5310-01-531-4939	12.1	19	5940-01-531-6448	8	4
	12.1	27		15	3
	13.1	2	5310-01-531-6724	12.1	2
	18	66	5330-01-531-6822	BULK	30
5940-01-531-5519	8	63	5340-01-531-7746	2	56
	8	70	5310-01-532-0291	26	3
	8	78		28	12
	8	85		30	4
	8	93		32	6
	8	100	5310-01-532-0321	12.1	14
	8	108		19.1	24
	8	115		23.1	12
	8	123		23.1	18
	8	130	5340-01-532-0643	2	3
	8	141	4730-01-532-0694	13	3
	8	149	5340-01-533-0084	2	26
	8	156	6130-01-533-2167	22	45
	8	166	6115-01-533-2172	22	46
	8	176	5340-01-535-0248	2	62
	8	198	4820-01-540-3024	13	47
	8	211	5340-01-550-0921	12.1	7
	15	45	6160-01-553-5219	1	23
	15	55	2910-01-553-6571	13	16
	15	65		13.1	12
	15	74	1440-01-560-1702	18	42
	15	84	4730-12-167-2104	29	4
5940-01-531-5660	7	57	2920-12-187-7756	29	1
5940-01-531-6040	8	19	4320-12-326-9400	29	3
5310-01-531-6085	26	2	5904-14-485-6282	29	2

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
D2212	0102124405	2920-12-187-7756	29	1
30554	01-21501-1	6110-01-363-0493	7	55
30554	01-21501-2	6110-01-379-7187	7	55
30554	01-21504-1	5950-01-370-3328	16	35
30554	01-21504-2	5950-01-368-3006	16	35
30554	01-21506-1	---	7	3
30554	01-21506-2	---	7	3
30554	01-21507-1	6110-01-368-7123	7	55
81349	100R1A-16	---	BULK	14
81349	100R1AT-16	---	BULK	15
D8435	102064032050	4730-12-167-2104	29	4
19207	11682345	5935-01-044-8382	1	39
19207	12258941	5935-01-102-7124	8	31
81343	12 130109G	---	19	1
81343	12-12 140339C	4730-00-900-8663	19	8
97403	13214E3291-3	5310-00-052-3632	4	31
97403	13214E3789-2	5320-00-932-1972	18	30
			27	2
30554	13218E0320-49	5310-00-533-2743	26	4
			28	14
			30	5
			32	5
30554	13218E0320-293	5310-00-913-8881	1	18
97403	13226E0107-3	5940-00-813-0698	34	7
97403	13226E0107-11	5940-00-283-5280	34	10
75915	150145	5920-01-396-1989	7	94
50434	1901-0759	5961-00-295-5757	6	14
			7	69
			8	36
60177	19450-2	5925-01-365-9757	7	22
80131	1N3663	5961-00-478-7687	21	31
80121	1N3663R	5961-01-013-0682	21	32
72205	1-4INDIA	4020-00-523-9641	BULK	26
F1425	251667010001	5905-14-485-6282	29	2
D8435	251671250100	4320-12-326-9400	29	3
60177	29100	5925-01-381-5199	7	22
81343	2-130109E	4730-00-287-3281	18	36
81343	2-2 140239C	4730-00-725-3664	13.1	13
21335	312KDD	3110-00-155-6298	22	25
81343	4-130109E-C	4730-00-089-2515	10.1	1
81343	4-2 070102C	4730-00-187-0840	13	17
81343	4-2 140137C	4730-00-802-2560	13	5
81343	4-4 070202C	4730-01-051-9840	13.1	6
81343	4-4-130238	4730-00-613-6468	13	48
81343	4-4-4-140424B	4730-01-470-6199	28	10
81343	4-4-4 140424C	4730-00-177-6166	13	36
99739	6130TZS-S1SXPSA1S.75X1.00	5330-01-384-1755	BULK	33
57137	62-B7-1/16	9390-01-408-1672	BULK	25
52676	6308-2RSJEM	3110-01-304-8142	21	21
30554	69-539-2	4730-00-812-1333	13	22
30554	69-561-1	5310-00-836-3520	7	62
			7	75

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
			8	20
			15	28
			16	60
30554	69-561-2	5310-00-063-7360	2	1
			6	8
			7	17
			9	22
			19.1	26
30554	69-561-3	5310-00-052-3632	7	27
			9	1
			16	38
30554	69-561-5	5310-00-696-5173	12.1	4
30554	69-561-6	5310-01-012-3595	1	37
			2	8
			3	10
			4	1
			5	1
			7	92
			9	11
			12	7
			13	7
			14	1
			16	30
			17	5
			18	1
30554	69-570-3	5975-00-257-8055	4	19
30554	69-574	6625-00-869-3141	6	34
30554	69-583	5340-01-157-9475	4	18
30554	69-593	6210-00-935-6919	6	2
30554	69-594	6240-00-155-7878	6	1
30554	69-597	6625-00-004-8066	6	36
30554	69-598	6625-00-081-5840	6	36
30554	69-599	6625-00-869-3144	6	29
30554	69-662-11	5305-01-367-2314	8	21
			15	29
30554	69-662-17	5305-00-211-9344	2	58
30554	69-662-20	5305-00-036-6972	2	2
			7	18
			19.1	16
30554	69-662-22	5305-00-218-4864	7	56
			7	88
30554	69-662-35	5305-00-038-3103	4	30
			7	44
30554	69-662-36	5305-00-036-6902	16	39
30554	69-662-37	5305-00-038-3145	7	33
30554	69-662-5	5305-00-224-1092	7	63
			7	76
			16	61
30554	69-662-64	5305-00-191-6226	16	31
30554	69-662-65	5305-01-187-5878	7	74
			16	43

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
			7	14
30554	69-662-7	5305-01-204-4683	7	77
30554	69-668	4720-00-021-3320	13	85
30554	69-668-2	---	13	88
30554	69-692-1	5940-00-958-1214	17	40
19207	6TMF/TYPEI	6140-01-446-9498	1	22
36156	702806-01	---	21	48
		---	22	60
36156	703320-02	---	21	16
36156	703513-01	---	22	20
36156	706336-03	---	21	55
36156	707329-01	---	21	38
36156	707329-01	---	22	50
36156	707806-0A	---	21	34
36156	707807-02	6130-01-533-2167	22	45
30554	70-1580	5975-00-417-0543	7	19
30554	70-4012	6625-00-003-0975	6	37
36156	716327-0A	2930-01-329-4857	21	40
			22	52
36156	718337-01	---	22	17
36156	718514-01	---	22	7
36156	718515-01	---	22	9
36156	718516-01	---	22	8
36156	718517-01	---	22	10
36156	718810	---	21	26
36156	720344-03	---	21	6
36156	720345-03	---	21	5
36156	720346-0C	---	21	4
36156	720982-0A	---	22	5
30554	72-2062-1	5310-01-289-7716	16	55
30554	72-2098-2	5340-01-222-4225	16	49
30554	72-2173-1	4730-00-765-9103	13	49
30554	72-2213	5940-00-606-4970	16	57
30554	72-2236	5940-01-003-8579	16	56
			17	41
30554	72-5304	4730-01-470-1982	19	6
30554	73-0507	6645-00-089-8842	6	33
36156	752818-0A	---	21	11
36156	752818-0A	---	22	15
30554	75-0809	4730-01-126-2173	13	87
36156	777056-0A	2920-01-298-6321	22	28
36156	777068-0A	---	22	24
36156	777070-0A	---	21	20
36156	777079-0A	5961-01-248-1712	21	25
36156	778715-0A	---	21	33
36156	783621-0A	---	21	49
36156	783622-0A	---	22	62
36156	789293-0A	6115-01-385-3104	22	22
36156	789295-0A	---	21	18
36156	791149-0A	---	21	35
36156	791150-0A	6115-01-533-2172	22	46
36156	801016-06	5305-01-324-4896	21	23

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
36156	834822-01	---	21	12
36156	834822-01	---	22	16
16428	8407	6145-00-567-7412	BULK	1
36156	846833-01	5340-01-382-2589	21	13
81343	8-4 430160C	4730-01-417-5855	19.1	2
36156	865873-01	5330-01-369-7318	22	23
36156	865876-01	5330-01-374-4468	21	19
30554	88-20013	---	2	57
30554	88-20014	5340-01-531-7746	2	56
30554	88-20018-1	5975-00-074-2072	13.1	9
30554	88-20024-5	5340-01-086-2049	13	86
30554	88-20029-4	4730-00-063-7919	13	31
30554	88-20033-10A	5310-01-531-6085	26	2
			28	12
			30	3
			32	7
30554	88-20033-21A	---	10.1	15
30554	88-20033-21A	---	23.1	3
30554	88-20033-22A	5310-01-531-4939	12.1	19
			12.1	27
			13.1	2
			18	66
30554	88-20033-24A	5310-01-531-4937	10.1	6
			12.1	9
			18	72
			19.1	14
			23.1	7
30554	88-20033-26B	5310-00-205-9951	17	30
30554	88-20033-31A	5310-01-532-0321	12.1	14
			19.1	24
			23.1	12
			23.1	18
30554	88-20033-34A	---	23.1	25
30554	88-20033-40B	5310-00-465-2719	17	9
30554	88-20033-41A	5310-01-266-4641	23.1	22
30554	88-20037WDG21	5340-00-598-0622	28	9
30554	88-20043	4820-01-480-0846	13	43
30554	88-20049	4930-01-475-0388	13	44
30554	88-20050	5325-01-301-7903	2	39
			9	16
30554	88-20051	5325-01-161-2654	9	10
30554	88-20052	5310-00-822-8525	2	37
			9	8
30554	88-20063-05	---	3	46
30554	88-20063-06	---	3	46
30554	88-20064-5	---	21	54
30554	88-20064-6	---	22	67
30554	88-20073	---	9	32
30554	88-20074	---	9	30
30554	88-20075	---	3	47
30554	88-20102	9905-01-377-5094	4	28

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-20110	---	2	67
30554	88-20123	---	2	24
30554	88-20126	---	2	68
30554	88-20147-1	5920-00-539-6920	7	9
30554	88-20176	5930-01-368-2893	6	24
30554	88-20187	9390-01-470-1205	12	58
30554	88-20188	5999-01-382-8223	1	17
30554	88-20197	9905-01-372-7986	9	31
30554	88-20210	5320-01-366-4394	3	23
			4	3
30554	88-20218	2920-01-388-2776	4	20
30554	88-20242	5310-01-365-4381	9	9
30554	88-20247-2	5310-01-365-3190	23	15
			23.1	21
30554	88-20247-3	5310-01-365-8139	20	7
30554	88-20251	5935-01-367-7814	7	20
30554	88-20252	5340-01-396-0454	2	59
30554	88-20258	5340-01-470-2973	7	45
30554	88-20260-20	5306-01-368-8041	2	55
30554	88-20260-21	5306-01-156-7663	1	38
			2	9
			3	6
			4	2
			5	2
			7	28
			7	89
			9	12
			12	8
			13	8
			14	2
			16	44
			17	6
			18	2
			26	1
			28	11
			30	1
30554	88-20260-23	5305-01-365-6313	2	5
			3	1
			4	13
			5	3
30554	88-20260-25	5305-01-365-6314	17	44
30554	88-20260-30	5305-01-369-2166	10.1	13
			12.1	17
			12.1	26
			13.1	3
			23.1	28
30554	88-20260-31	5306-00-484-5730	13	20
30554	88-20260-31	5305-01-531-4346	2	21
			3	30
			10	6
30554	88-20260-32	5305-01-056-1501	4	17
			11	9

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
			12	27
			23	7
30554	88-20260-33	5306-01-366-7075	3	33
			4	7
			18	26
30554	88-20260-35	5305-01-379-5734	13.1	7
			23.1	14
30554	88-20260-51	- - -	12.1	3
30554	88-20262	5905-01-368-2538	7	64
30554	88-20263	5905-01-365-6585	7	65
30554	88-20265	5905-01-368-2539	7	66
30554	88-20266	5905-01-366-7074	7	67
30554	88-20267	5905-01-368-2540	7	68
30554	88-20272	5940-00-954-3558	7	71
30554	88-20274-1	5940-01-425-2020	8	2
			8	2
			8	40
			8	47
			8	54
			8	64
			8	79
			8	101
			8	116
			8	124
			8	142
			8	150
			8	159
			8	186
			8	200
			8	212
			15	2
30554	88-20274-11	5940-01-259-2190	7	25
			8	11
			8	216
30554	88-20274-3	5940-01-531-6448	8	4
			15	3
30554	88-20274-4	5940-01-369-2270	8	5
			8	72
			8	134
			8	188
			15	4
30554	88-20274-5	5940-01-110-6423	7	26
			8	6
			8	62
			8	69
			8	77
			8	84
			8	92
			8	107
			8	114
			8	122

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
			8	140
			8	148
			8	167
			8	177
			8	199
			8	210
30554	88-20274-6	5940-01-367-9569	15	8
			8	7
			8	71
			8	86
			8	132
			15	7
30554	88-20275-1	5940-01-112-9746	15	11
			18	17
30554	88-20275-2	5940-01-126-3973	18	18
30554	88-20275-3	5940-01-082-3321	15	59
			15	77
			17	11
			17	15
			17	19
			17	23
30554	88-20275-4	5940-01-139-0853	15	78
30554	88-20276	---	2	11
30554	88-20277	---	2	10
30554	88-20278	5340-01-532-0643	2	3
30554	88-20286	5330-01-366-2836	13	65
30554	88-20299	5305-01-365-9390	7	70
30554	88-20305-1	---	17	10
30554	88-20305-1-1	---	17	13
30554	88-20305-2	---	17	14
30554	88-20305-2-1	---	17	17
30554	88-20305-3	---	17	18
30554	88-20305-3-1	---	17	21
30554	88-20305-5	5905-01-463-0058	17	22
30554	88-20305-5-1	---	17	25
30554	88-20444-2	6145-01-422-8602	BULK	35
30554	88-20461	---	2	50
30554	88-20468	2930-01-370-2868	12	63
30554	88-20468-1	---	12	64
30554	88-20468-2	---	12	65
30554	88-20468-3	---	12	66
30554	88-20470	5935-01-012-1273	15	42
			15	42A
30554	88-20471	5935-00-482-7721	18	45
			18	80
30554	88-20472	5935-01-020-4094	15	92
30554	88-20473	---	8	207
30554	88-20474	5935-00-315-9563	13	69
			15	41
30554	88-20475	5935-00-483-0259	13	61
			13	70
30554	88-20476	5999-01-092-2655	8	206

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
			13	60
			13	72
			18	44
			18	79
30554	88-20477	5999-01-039-8438	13	73
			15	40
			15	87
30554	88-20492	6680-01-392-8821	13	66
30554	88-20493	- - -	13	71
30554	88-20540-2	6145-00-851-8505	34	2
			34	6
			34	9
30554	88-20543-2	5325-00-074-3301	BULK	9
30554	88-20551-1	4720-01-215-0816	13	89
30554	88-20554-1	- - -	18	75
30554	88-20556-4	5310-01-532-0291	26	3
			28	13
			30	4
			32	6
30554	88-20556-38	- - -	10.1	14
			12.1	18
			12.1	28
			13.1	1
			23.1	2
30554	88-20556-6	5310-01-477-9621	19.1	28
30554	88-20556-7	5310-01-531-6724	12.1	2
30554	88-20561-1	4730-01-470-1626	13.1	5
			19.1	3
30554	88-20561-2	4730-01-470-2409	19.1	1
30554	88-20561-3	4730-01-470-1567	10.1	9
			12	13
			12.1	24
			19.1	17
30554	88-20561-4	4730-01-470-1595	10.1	7
			11	1
			12	1
30554	88-20561-5	4730-01-470-1423	11	2
30554	88-20561-6	4730-01-470-1578	10	2
			13	13
30554	88-20561-7	4730-01-470-1701	13	14
30554	88-20564-2	5310-00-809-4058	12.1	5
30554	88-20564-3	5310-01-234-9415	19.1	27
30554	88-20568-4	5310-01-470-6529	23.1	24
30554	88-20568-5	5310-01-470-2776	23.1	23
30554	88-20574-2	- - -	8	209
30554	88-20575	5920-00-892-9311	7	10
30554	88-20579-3	4720-01-470-3929	BULK	16
30554	88-20579-4	4720-01-470-6230	BULK	42
30554	88-20579-6	4720-00-670-6037	BULK	43
30554	88-20579-7	4720-00-235-4131	BULK	44
30554	88-20592-1	5905-00-539-2479	7	1

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-20596-1	5940-01-531-5519	8	63
			8	70
			8	78
			8	85
			8	93
			8	100
			8	108
			8	115
			8	123
			8	130
			8	141
			8	149
			8	156
			8	166
			8	176
			8	198
			8	211
			15	45
			15	55
			15	65
			15	74
30554	88-20596-2	5940-01-135-7081	15	84
			8	41
			8	48
			8	55
30554	88-20596-3	5940-01-136-0953	8	197
			8	187
30554	88-20879-7	- - -	19.1	7
30554	88-21005	6115-01-383-3124	21	1
30554	88-21006	6115-01-434-1432	22	1
30554	88-21015	5950-01-382-3371	16	34
30554	88-21043	2910-01-388-6383	13	76
30554	88-21061	6695-01-367-9723	18	19
30554	88-21065	- - -	11	13
30554	88-21066	6110-01-367-8921	16	36
30554	88-21069-12	5340-01-366-3360	20	12
30554	88-21071-3	5342-01-467-4366	23	22
			23.1	20
30554	88-21072	6625-01-366-0192	6	35
30554	88-21073	6625-01-368-7973	6	35
30554	88-21078	5930-01-368-2891	6	22
30554	88-21080	5930-01-365-9613	7	7
30554	88-21081	5930-01-365-9614	18	29
			18	61
30554	88-21082	5945-01-365-9953	16	37
30554	88-21084	5935-01-367-4422	8	28
30554	88-21085	5945-00-458-3351	7	37
30554	88-21098	5340-01-368-6048	2	35
30554	88-21099	5340-01-379-0893	2	15
30554	88-21101	2910-01-364-9843	13	84
			13.1	8
30554	88-21103	6625-01-366-0193	6	30

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-21104	6620-01-368-1531	6	32
30554	88-21105	6685-01-369-6549	6	31
30554	88-21114-2	4730-00-041-2526	13	37
30554	88-21121-1	2910-01-376-2268	13	62
30554	88-21124	6210-00-831-8247	6	4
30554	88-21126	5930-01-378-6921	18	10
			19.1	18
30554	88-21127	2940-01-531-4912	11	6
30554	88-21129	5340-01-074-8126	11	12
30554	88-21131	5950-01-368-2915	16	33
30554	88-21133	6695-01-367-9722	7	47
30554	88-21134	6695-01-368-7114	7	31
30554	88-21135	6695-01-369-9312	7	31
30554	88-21138	5945-01-366-2725	7	35
30554	88-21140	5945-01-366-2728	7	49
30554	88-21141	5945-01-366-2726	7	36
30554	88-21142	6625-01-381-7445	7	30
30554	88-21144	6625-01-367-8436	7	60
30554	88-21145	5945-01-366-2727	7	48
30554	88-21146	5120-01-373-8976	17	4
30554	88-21155	5925-00-089-3031	7	8
30554	88-21162-3	2910-01-369-5012	13	63
30554	88-21165	6625-01-381-8195	7	34
30554	88-21173	4730-00-200-0531	13	42
30554	88-21177-1	4720-01-375-1929	11	3
30554	88-21179	5905-01-063-9644	17	45
30554	88-21181-10	5940-01-478-1154	15	39
30554	88-21181-12	---	8	17
30554	88-21181-2	5940-01-470-2470	15	36
30554	88-21181-22	5940-01-531-6040	8	19
30554	88-21182-10	5940-01-470-3031	16	40
30554	88-21182-12	---	7	58
30554	88-21182-2	5940-01-470-2768	16	41
30554	88-21182-22	5940-01-531-5660	7	57
30554	88-21183-2	5999-01-366-2621	7	59
			8	16
			15	38
30554	88-21580	---	16	1
30554	88-21582	---	16	1
30554	88-21585	---	2	31
30554	88-21590	---	3	43
30554	88-21593	---	7	15
30554	88-21596	---	3	19
30554	88-21598	---	3	8
30554	88-21600	---	3	13
30554	88-21601	---	3	20
30554	88-21603	---	2	71
30554	88-21604-104	---	13	33
30554	88-21604-110	---	19	3
30554	88-21604-146	---	13	32
30554	88-21604-151	---	13	34

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-21604-228	---	12	3
30554	88-21604-272	---	12	11
30554	88-21604-295	---	2	4
30554	88-21604-317	---	3	22
30554	88-21604-317	---	12	50
30554	88-21604-339	---	13	77
30554	88-21604-343	---	13	38
30554	88-21604-356	---	2	16
30554	88-21604-364	---	12	37
30554	88-21604-396	---	13	94
30554	88-21605-104	---	13	33
30554	88-21605-110	---	19	3
30554	88-21605-146	---	13	32
30554	88-21605-151	---	13	34
30554	88-21605-228	---	12	3
30554	88-21605-272	---	12	11
30554	88-21605-295	---	2	4
30554	88-21605-317	---	3	22
30554	88-21605-317	---	12	50
30554	88-21605-339	---	13	77
30554	88-21605-343	---	13	38
30554	88-21605-356	---	2	16
30554	88-21605-364	---	12	37
30554	88-21605-396	---	13	94
30554	88-21633	4820-01-367-1836	18	11
			19.1	21
30554	88-21635	---	2	65
30554	88-21649-17	---	22	41
30554	88-21649-19	---	22	40
30554	88-21666	---	17	38
30554	88-21669	---	16	58
30554	88-21674-1	5310-01-366-8134	7	16
30554	88-21674-2	5310-00-903-8595	3	7
			4	12
			9	13
30554	88-21674-3	5340-00-297-0312	3	34
			4	11
			17	36
30554	88-21676-1	5905-01-336-7533	7	6
30554	88-21683	6160-01-553-5219	1	23
30554	88-21684	6160-01-480-5918	1	20
30554	88-21685	5306-01-366-4527	1	21
30554	88-21694	---	3	36
30554	88-21695	4140-01-466-8879	12	43
30554	88-21700	---	12	31
30554	88-21712	2990-01-390-4457	10	8
30554	88-21723	---	4	29
30554	88-21729	5935-01-366-9934	8	35
30554	88-21730	5999-01-320-7853	8	34
30554	88-21731	---	24	5
30554	88-21732	---	2	40
30554	88-21733	---	2	41

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-21743	---	11	11
30554	88-21755-3	---	19	4
30554	88-21755-4	4730-00-187-0840	13.1	11
30554	88-21767	---	17	35
30554	88-21770	5340-01-528-8654	4	25
30554	88-21771	---	2	33
30554	88-21775	---	17	46
30554	88-21776	---	18	31
30554	88-21783	---	21	43
30554	88-21783	---	22	55
30554	88-21795-8	---	21	30
30554	88-21798	---	22	68
30554	88-21804	---	22	11
30554	88-21813	---	2	63
30554	88-21814	---	2	61
30554	88-21815	5340-01-535-0248	2	62
30554	88-21820	---	2	32
30554	88-21821-01	---	3	48
30554	88-21821-02	---	3	48
30554	88-21849	---	12	9
30554	88-21850	---	13	64
30554	88-21854	---	13	54
30554	88-21860	2910-01-368-7644	7	50
30554	88-21861	2910-01-371-4356	7	50
30554	88-21868	---	9	14
30554	88-21869	---	9	15
30554	88-21870	---	2	12
30554	88-21871	---	9	26
30554	88-21873	---	9	25
30554	88-21874	---	9	24
30554	88-21875	5340-01-528-9207	2	17
30554	88-21876	---	9	21
30554	88-21877	---	2	14
30554	88-21883	4730-01-474-2274	13	35
30554	88-21884	4730-01-134-9827	13	6
30554	88-21887	4730-01-236-1186	18	14
30554	88-21889	---	3	42
30554	88-21890	5340-01-392-8822	2	36
30554	88-21891	---	19	5
30554	88-21892	5340-01-465-7761	13	9
30554	88-21893	5340-01-465-7765	13	10
30554	88-21896	5945-01-365-9954	7	42
30554	88-21897-1	5935-01-383-2612	8	29
30554	88-21897-2	---	7	43
30554	88-21898	5980-01-198-6311	6	6
30554	88-21899	5980-01-076-8659	6	5
30554	88-21913	---	3	35
30554	88-21925	---	4	10
30554	88-21928	---	3	18
30554	88-21930-1	5310-01-366-4412	16	54
			17	29

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-21930-2	5310-01-183-5529	17	8
30554	88-21930-3	5310-01-396-5836	3	26
30554	88-21930-4	5310-01-406-1672	2	45
30554	88-21932	---	16	45
30554	88-21933	---	17	37
30554	88-21939	5935-01-014-7861	8	25
30554	88-21940	5935-01-023-5445	15	34
30554	88-21941	5999-01-366-5119	8	23
			8	169
			8	201
			34	4
30554	88-21942	5999-01-170-0558	15	31
			15	67
			15	76
			15	86
			33	1
30554	88-21943	5999-01-463-4017	8	24
			8	61
			8	131
			8	179
			8	196
30554	88-21944	5999-01-366-7952	15	32
			15	46
			15	56
			15	75
			15	85
30554	88-21947	5935-01-014-4920	15	30
30554	88-21952	---	3	39
30554	88-21959	2990-01-369-2079	10	3
30554	88-21962	---	3	12
30554	88-21964	---	4	21
30554	88-21971	---	7	73
30554	88-21975	5340-01-367-1503	10	1
30554	88-21976	---	7	15
30554	88-21977	---	4	22
30554	88-21980	---	9	19
30554	88-21981	5935-01-102-0366	8	27
30554	88-21982	5935-01-101-7828	15	33
30554	88-21988	---	3	9
30554	88-21995	---	7	87
30554	88-21998	---	2	60
30554	88-22007	---	24	6
30554	88-22032	---	3	44
30554	88-22037	---	4	26
30554	88-22039	---	16	64
30554	88-22040	---	4	24
30554	88-22042	---	9	20
30554	88-22051	---	3	37
30554	88-22060	---	16	46
30554	88-22063	---	2	43
30554	88-22068	4720-01-392-0319	13	15
30554	88-22070	---	2	30

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-22071	5940-01-368-6774	8	10
30554	88-22072	---	4	4
30554	88-22074	---	4	23
30554	88-22077	---	2	22
30554	88-22078	---	2	65
30554	88-22088	---	2	28
30554	88-22089	---	2	29
30554	88-22096-2	4820-01-540-3024	13	47
30554	88-22098-1	---	8	38
30554	88-22098-1-1	---	8	39
30554	88-22098-2	---	8	45
30554	88-22098-2-1	---	8	46
30554	88-22098-3	---	8	52
30554	88-22098-3-1	---	8	53
30554	88-22099-1	---	8	59
30554	88-22099-1-1	---	8	60
30554	88-22099-2	---	8	67
30554	88-22099-2-1	---	8	68
30554	88-22099-3	---	8	75
30554	88-22099-3-1	---	8	76
30554	88-22099-5	---	8	90
30554	88-22099-5-1	---	8	91
30554	88-22099-6	---	8	97
30554	88-22099-6-1	---	8	98
30554	88-22099-7	---	8	82
30554	88-22099-7-1	---	8	83
30554	88-22100	---	8	105
30554	88-22100-1	---	8	106
30554	88-22101-1	---	8	112
30554	88-22101-10	---	15	43
30554	88-22101-10-1	---	15	44
30554	88-22101-11	---	15	53
30554	88-22101-1-1	---	8	113
30554	88-22101-11-1	---	15	54
30554	88-22101-2	---	8	120
30554	88-22101-2-1	---	8	121
30554	88-22101-3	---	8	128
30554	88-22101-3-1	---	8	129
30554	88-221014	---	8	138
30554	88-22101-4-1	---	8	139
30554	88-22101-5	---	8	146
30554	88-22101-5-1	---	8	147
30554	88-22102-1	---	8	154
30554	88-22102-1-1	---	8	155
30554	88-22102-1-12	---	8	160
30554	88-22102-2	---	8	164
30554	88-22102-2-1	---	8	165
30554	88-22102-3	---	8	174
30554	88-22102-3-1	---	8	175
30554	88-22103-7	---	15	63
30554	88-22103-7-1	---	15	64

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-22103-8	---	15	72
30554	88-22103-8-1	---	15	73
30554	88-22103-9	---	15	82
30554	88-22103-9-1	---	15	83
30554	88-22104	---	8	184
30554	88-22104-1	---	8	185
30554	88-22106	---	7	61
30554	88-22106-11	---	7	72
30554	88-22111	---	13	12
30554	88-22116	---	3	11
30554	88-22119-11	5940-01-369-2268	1	33
30554	88-22119-12	5940-01-369-6948	15	19
			15	47
			17	12
			17	16
			17	20
			17	24
30554	88-22119-14	5940-01-369-2872	1	4
			1	8
			1	13
			1	27
			1	32
30554	88-22119-22	5940-00-581-4325	1	28
30554	88-22119-3	5940-01-369-2271	16	3
			16	7
			16	19
			16	23
			16	27
30554	88-22120	---	9	3
30554	88-22120-2	---	9	7
30554	88-22120-4	---	9	4
30554	88-22122	5325-00-351-4543	16	47
30554	88-22123	6150-01-494-3984	1	3
30554	88-22123-1	---	1	6
30554	88-22123-3	---	1	5
30554	88-22126-1	---	16	2
30554	88-22126-1-1	---	16	5
30554	88-22126-2	---	16	6
30554	88-22126-2-1	---	16	9
30554	88-22126-3	---	16	10
30554	88-22126-3-1	---	16	13
30554	88-22126-4	---	16	14
30554	88-22126-4-1	---	16	17
30554	88-22126-5	---	16	18
30554	88-22126-5-1	---	16	21
30554	88-22126-6	---	16	22
30554	88-22126-6-1	---	16	25
30554	88-22126-7	---	16	26
30554	88-22126-7-1	---	16	29
30554	88-22135	---	23	19
30554	88-22136	---	17	7
30554	88-22137	6110-01-397-2108	5	6

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-22137-105	---	6	16
30554	88-22137-105	---	7	11
30554	88-22138	6110-01-383-4531	5	6
30554	88-22141	5930-01-366-0048	6	26
			27	7
30554	88-22146	---	17	43
30554	88-22163-1	---	17	42
30554	88-22164	6150-01-407-8102	15	1
30554	88-22164	6150-01-407-8102	16	70
30554	88-22167	2930-01-368-1071	12	46
30554	88-22170	4720-01-374-0783	12	2
30554	88-22171	4720-01-385-1102	12	14
30554	88-22172	4720-01-368-5430	12	15
30554	88-22174	---	23	20
30554	88-22179	6140-01-418-6342	1	7
30554	88-22179-1	---	1	11
30554	88-22179-3	---	1	9
30554	88-22179-4	---	1	10
30554	88-22182	5330-01-368-5932	10	13
30554	88-22183	2990-01-374-9149	10	12
30554	88-22201	5310-01-500-7620	18	20
30554	88-22202	5945-00-855-7478	18	3
30554	88-22209	6150-01-406-9533	7	81
30554	88-22209-7	---	7	84
30554	88-22210	---	2	69
30554	88-22211	---	2	66
30554	88-22300	4720-01-366-6257	11	5
30554	88-22301	4710-01-392-8846	11	4
30554	88-22302-12	---	12	5
30554	88-22302-4	---	12	18
30554	88-22302-6	---	12	19
30554	88-22303	6150-01-383-6511	7	96
			8	1
30554	88-22307	4730-01-366-9017	18	9
30554	88-22309	6150-01-494-3982	1	26
30554	88-22309-1	---	1	30
30554	88-22309-3	---	1	29
30554	88-22310	6150-01-494-3983	1	12
30554	88-22310-1	---	1	16
30554	88-22310-3	---	1	14
30554	88-22310-4	---	1	15
30554	88-22311	6150-01-494-3985	1	31
30554	88-22311-1	---	1	36
30554	88-22311-4	---	1	34
30554	88-22311-5	---	1	35
30554	88-22312	5935-01-312-7038	8	22
30554	88-22313	5935-01-104-6137	8	26
30554	88-22315	2815-01-350-2207	23	12
30554	88-22317	5930-01-377-9113	18	32
30554	88-22319	---	18	7
30554	88-22320	---	18	28

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-22321	---	23	4
30554	88-22322	5905-01-392-8825	18	15
30554	88-22322	---	18	64
30554	88-22323	4730-01-531-4884	12	21
30554	88-22324	4730-01-376-4256	13	74
30554	88-22325	4720-01-366-7172	13	40
30554	88-22326-1	4720-01-394-1931	13	39
30554	88-22331-1	5310-01-099-9532	10.1	5
			12	61
			12.1	10
			18	71
			19.1	13
			23	10
			23.1	8
30554	88-22331-2	5310-01-368-3048	10	10
			18	6
			18	22
			18	34
			19.1	23
			20	18
			23.1	11
			23.1	17
30554	88-22331-3	5310-01-195-6611	18	38
			18	67
30554	88-22331-4	5310-01-368-3049	18	52
30554	88-22336-1	5310-00-189-8467	17	39
30554	88-22338-1	4720-01-375-1391	13	30
30554	88-22339	5365-01-384-9169	20	3
			21	47
30554	88-22339	5365-01-384-9169	22	59
30554	88-22416	5330-01-392-8826	18	50
30554	88-22418-2	5961-01-470-4673	6	11
30554	88-22418-2-2	---	6	13
30554	88-22424	---	12	32
30554	88-22425	---	23	11
30554	88-22428	2910-01-371-2689	18	46
30554	88-22429	2990-01-389-3003	3	5
30554	88-22430	5340-01-367-8956	3	4
30554	88-22436	5940-01-369-2877	16	53
30554	88-22437	5940-01-384-0384	16	51
30554	88-22459	---	17	31
30554	88-22463	5945-01-369-0791	7	42
30554	88-22469	4020-01-470-6597	17	1
30554	88-22469-2	---	17	3
30554	88-22472	5340-01-533-0084	2	26
30554	88-22474	---	2	52
30554	88-22475	---	2	54
30554	88-22476	---	2	53
30554	88-22478	---	2	44
30554	88-22479	---	2	51
30554	88-22480	---	2	70
30554	88-22481	---	18	13

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-22482	5365-01-431-4603	2	47
30554	88-22483	5365-01-431-4540	2	46
30554	88-22485	---	13	80
30554	88-22486	---	13	78
30554	88-22489	4140-01-507-4174	12	59
30554	88-22490	4140-01-507-4176	12	54
30554	88-22491	---	12	57
30554	88-22492	---	12	56
30554	88-22493	---	12	62
30554	88-22500	---	2	27
30554	88-22501	---	2	25
30554	88-22508	5310-01-365-4386	20	9
30554	88-22509	6110-01-372-2597	16	62
30554	88-22510	---	3	17
30554	88-22512	---	3	21
30554	88-22513	---	3	14
30554	88-22514	---	3	38
30554	88-22524	---	20	13
30554	88-22525	---	20	14
30554	88-22528	---	3	15
30554	88-22530	5305-01-366-3501	20	11
30554	88-22533	5340-01-368-6063	12	12
30554	88-22543	---	12	67
30554	88-22545	1440-01-560-1702	18	42
30554	88-22547	---	13	58
30554	88-22550	---	18	16
30554	88-22554-2	4730-01-370-5426	12	16
30554	88-22554-3	4730-01-378-5224	12	22
30554	88-22555	5340-01-107-7559	6	28
30554	88-22580	5930-01-368-2892	7	2
30554	88-22594	---	4	5
30554	88-22595	---	3	24
30554	88-22617	---	18	49
30554	88-22618	5330-01-366-6589	18	47
30554	88-22619	5340-01-367-2328	18	54
30554	88-22620	5315-01-366-6685	18	57
30554	88-22621	---	18	56
30554	88-22623	5340-01-367-2287	18	39
30554	88-22624	5360-01-368-4663	18	58
30554	88-22626	5307-01-374-4451	2	38
30554	88-22629-002	---	8	43
30554	88-22629-004	---	8	42
30554	88-22629-005	---	8	44
30554	88-22629-006	---	8	49
30554	88-22629-007	---	8	50
30554	88-22629-008	---	8	51
30554	88-22629-009	---	8	56
30554	88-22629-010	---	8	57
30554	88-22629-011	---	8	58
30554	88-22629-012	---	8	65
30554	88-22629-013	---	8	66

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-22629-014	---	8	73
30554	88-22629-015	---	8	74
30554	88-22629-016	---	8	80
30554	88-22629-017	---	8	81
30554	88-22629-019	---	8	88
30554	88-22629-020	---	8	95
30554	88-22629-021	---	7	46
30554	88-22629-021	---	8	96
30554	88-22629-022	---	8	103
30554	88-22629-023	---	8	104
30554	88-22629-024	---	8	89
30554	88-22629-025	---	8	110
30554	88-22629-026	---	8	111
30554	88-22629-027	---	8	117
30554	88-22629-028	---	8	118
30554	88-22629-029	---	8	119
30554	88-22629-030	---	8	125
30554	88-22629-031	---	8	126
30554	88-22629-032	---	8	127
30554	88-22629-033	---	8	135
30554	88-22629-034	---	8	136
30554	88-22629-035	---	8	137
30554	88-22629-036	---	8	143
30554	88-22629-037	---	8	144
30554	88-22629-038	---	8	145
30554	88-22629-039	---	8	151
30554	88-22629-040	---	7	13
30554	88-22629-040	---	8	152
30554	88-22629-040	---	8	214
30554	88-22629-041	---	7	12
30554	88-22629-041	---	8	153
30554	88-22629-041	---	8	215
30554	88-22629-043	---	15	50
30554	88-22629-044	---	15	51
30554	88-22629-046	---	15	60
30554	88-22629-050	---	15	52
30554	88-22629-051	---	15	61
30554	88-22629-052	---	15	62
30554	88-22629-053	---	8	161
30554	88-22629-054	---	8	162
30554	88-22629-055	---	8	163
30554	88-22629-056	---	8	171
30554	88-22629-057	---	8	172
30554	88-22629-058	---	8	173
30554	88-22629-059	---	8	181
30554	88-22629-060	---	8	182
30554	88-22629-061	---	8	183
30554	88-22629-063	---	15	69
30554	88-22629-064	---	15	70
30554	88-22629-066	---	15	79
30554	88-22629-067	---	15	80
30554	88-22629-069	---	15	88

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-22629-070	---	15	89
30554	88-22629-074	---	15	71
30554	88-22629-075	---	15	81
30554	88-22629-076	---	15	90
30554	88-22629-077	---	8	189
30554	88-22629-078	---	6	17
30554	88-22629-078	---	8	190
30554	88-22629-079	---	6	18
30554	88-22629-079	---	8	191
30554	88-22629-080	---	6	19
30554	88-22629-080	---	8	192
30554	88-22629-082	---	8	203
30554	88-22629-084	---	8	205
30554	88-22629-085	---	8	202
30554	88-22629-086	---	8	204
30554	88-22629-087	---	8	213
30554	88-22630	---	8	193
30554	88-22630-1	---	8	194
30554	88-22630-2	---	8	195
30554	88-22643	---	13	97
30554	88-22654	---	13	98
30554	88-22661	---	4	6
30554	88-22664	6150-01-384-0013	7	96
			8	1
30554	88-22666	---	2	42
30554	88-22667	---	3	27
30554	88-22668	2930-01-466-8474	12	39
30554	88-22672	5935-01-114-5354	7	39
30554	88-22701	---	14	3
30554	88-22702	---	3	16
30554	88-22703	5365-01-381-3773	12	47
30554	88-22704	---	14	4
30554	88-22705	5330-01-367-6329	BULK	29
30554	88-22706	5930-01-107-6474	18	8
			19.1	19
30554	88-22708	5330-01-537-6822	BULK	30
30554	88-22712	5330-01-384-3057	BULK	32
30554	88-22722	---	12	52
30554	88-22723	---	12	49
30554	88-22724	---	12	51
30554	88-22725	---	12	40
30554	88-22726	---	12	41
30554	88-22727	---	12	36
30554	88-22728	---	12	42
30554	88-22729	---	12	38
30554	88-22737	---	9	32
30554	88-22738	---	2	34
30554	88-22740	3030-01-463-9774	12	53
30554	88-22748	---	13	92
30554	88-22751	4820-01-381-5079	12	24
			12.1	20

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	88-22752-2	---	12	23
30554	88-22752-3	---	12	20
30554	88-22757-2	5910-01-343-8827	16	67
30554	88-22758	5910-01-384-1745	16	65
30554	88-22761	5915-01-396-9253	17	47
30554	88-22762	5915-01-394-0942	17	48
30554	88-22765	4730-01-407-0649	13	93
30554	88-22767	5970-01-280-0362	7	41
30554	88-22768	5340-01-078-9038	7	38
			7	40
30554	88-22772	---	9	27
30554	88-22773-1	5905-00-539-2573	6	20
30554	88-22773-2	5905-00-556-5306	6	27
30554	88-22773-3	5905-01-236-4041	6	27
30554	88-22774	---	9	28
30554	88-22784	5340-01-476-5376	18	40
30554	88-22786	5310-01-466-7247	16	52
			17	26
30554	88-22790-1	5310-01-466-6312	2	18
			3	28
			4	16
			10	4
			11	7
			12	25
			13	18
			23	5
			23.1	1
30554	88-22790-2	5310-01-470-1286	13	50
			19.1	29
30554	88-22790-3	5310-01-466-6687	12	44
			12.1	15
			24	1
30554	88-22791-1	5305-01-466-9756	2	23
30554	88-22791-2	5305-01-467-1561	9	23
30554	88-22792-2	5310-01-466-7321	17	27
			18	69
30554	88-22793-4	5305-01-464-6667	2	13
30554	88-22795	4730-01-532-0694	13	3
30554	88-22800	6140-01-457-4339	1	22
30554	88-22805	5915-01-488-5004	17	47
30554	88-22807	5915-01-466-8148	17	48
30554	88-22825-2	5925-01-493-9106	7	22
30554	88-22826-2	5925-01-466-8153	7	22
30554	88-24002-1	---	13.1	10
30554	95-8105-2	5940-00-411-5913	34	3
30554	95-8125-4	5310-00-208-9255	18	55
30554	96-23615	5340-01-470-5184	32	1
30554	96-23737	5930-01-499-3684	6	21
30554	97-24002	---	19.1	8
30554	97-24010	---	23.1	5
30554	97-24011	---	19	7
30554	97-24012	---	23.1	27

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	97-24013	---	23.1	15
30554	97-24014	---	23.1	19
30554	97-24015	---	19.1	25
30554	97-24016	---	19.1	20
30554	97-24017	---	18	73
30554	97-24018	---	18	81
30554	97-24019	---	12.1	8
30554	97-24020	---	10.1	16
30554	97-24021	---	10.1	2
30554	97-24022	---	10.1	8
30554	97-24023	---	23.1	6
30554	97-24024	---	19.1	11
30554	97-24025	---	19.1	9
30554	97-24026	---	19.1	15
30554	97-24028	---	10.1	11
30554	97-24029	---	10.1	10
30554	97-24030	---	10.1	12
30554	97-24031	---	19.1	5
30554	97-24032	---	12.1	23
30554	97-24033	---	12.1	29
30554	97-24034	---	12.1	1
30554	97-24035	---	12.1	25
30554	97-24036	---	12.1	12
30554	97-24037	---	23.1	30
30554	97-24038	---	23.1	13
30554	97-24039	---	23.1	29
30554	97-24040	---	12.1	16
30554	97-24041	---	12.1	22
30554	97-24042	---	11	11
30554	97-24044	---	13.1	15
30554	97-24045	---	18	62
30554	97-24048	---	15	1A
30554	97-24048	---	16	70
30554	97-24049	---	7	96
30554	97-24049	---	8	1
30554	97-24050-01	---	3	46
30554	97-24050-02	---	3	46
30554	97-24051	---	2	69
30554	97-24052	---	2	66
30554	97-24053	---	2	65
30554	97-24060	---	7	96
30554	97-24060	---	8	1
30554	97-24061	---	18	63
30554	97-24071	---	13.1	4
30554	97-24071	---	13.1	16
30554	97-24080	---	5	6
30554	97-24081	---	5	6
30554	97-24082	---	16	1
30554	97-24110	5925-00-068-3931	7	9
30554	97-24111-9	---	10.1	3
30554	97-24113	---	19.1	6

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	97-24114	---	18	77
30554	97-24116-4	---	20	20
30554	97-24116-5	---	20	17
			23.1	31
30554	97-24116-6	---	23.1	31
30554	97-24118	---	18	65
30554	97-24120	---	7	15
30554	97-24121	---	7	15
30554	97-24122	---	20	19
30554	97-24124	---	2	72
30554	97-24128	---	2	76
30554	97-24129	---	2	77
30554	97-24130	---	2	73
30554	97-24131	---	2	75
30554	97-24132	---	2	78
30554	97-24133	---	8	208
30554	97-24134	---	7	50
30554	97-24137	---	2	74
30554	97-24138	---	2	31
30554	97-24146	---	12.1	21
30554	97-24604-104	---	13	33
30554	97-24604-110	---	19	3
30554	97-24604-112	---	19.1	7
30554	97-24604-146	---	13	32
30554	97-24604-151	---	13	34
30554	97-24604-228	---	12	3
30554	97-24604-272	---	12	11
30554	97-24604-282	---	19.1	4
30554	97-24604-295	---	2	4
30554	97-24604-317	---	3	22
30554	97-24604-339	---	13	77
30554	97-24604-343	---	13	38
30554	97-24604-356	---	2	16
30554	97-24604-396	---	13	94
30554	97-24605-104	---	13	33
30554	97-24605-110	---	19	3
30554	97-24605-112	---	19.1	7
30554	97-24605-146	---	13	32
30554	97-24605-151	---	13	34
30554	97-24605-228	---	12	3
30554	97-24605-272	---	12	11
30554	97-24605-282	---	19.1	4
30554	97-24605-295	---	2	4
30554	97-24605-317	---	3	22
30554	97-24605-339	---	13	77
30554	97-24605-343	---	13	38
30554	97-24605-356	---	2	16
30554	97-24605-396	---	13	94
30554	98-2000	2990-01-483-4051	25	3
			29	5
30554	98-2001	---	27	3
30554	98-2002	---	30	2

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
30554	98-2003	---	27	10
30554	98-2008-4	---	32	3
30554	98-2013	2910-01-483-4069	25	4
			28	4
30554	98-2014	2915-01-482-8924	25	1
			26	5
30554	98-2015	6115-01-477-0566	25	6
30554	98-2017-3	5340-00-550-5943	32	8
30554	98-2018-1	6150-01-496-7717	25	2
			33	3
30554	98-2019-2	---	32	2
30554	98-2021	---	27	9
30554	98-2024-5	4730-00-235-4066	32	4
30554	98-2025-3	4730-01-449-1233	28	6
30554	98-2041	---	27	1
30554	98-2043	---	27	8
30554	98-2049-3	---	27	5
			34	5
30554	98-2049-4	---	27	4
			34	1
30554	98-2050	---	27	6
			34	8
30554	98-2053-3	---	25	5
30554	98-19744-03	---	13.1	14
96906	A50452-1	6240-01-466-3528	6	3
58536	A52425-1	5940-00-549-6581	1	2
03007	AA06060406	5340-01-367-6704	BULK	12
03007	AA07060408	5340-01-367-6703	BULK	11
58536	AA-52425-2	5940-00-549-6583	1	1
58536	AA55569/02-009	5920-01-414-6436	33	2
58536	AA55804-3B 9FT	5975-00-878-3791	3	40
80205	AN315-4	5310-01-494-2731	22	33
88044	AN565C416-12	5305-00-292-4562	21	17
88044	AN565C416H6	5305-01-080-5721	22	21
88044	AN565C816H16	5305-00-282-3249	22	61
36156	A-9696	---	21	52
36156	A-9696	---	22	65
80204	B1821BH025C075N	5305-00-068-0508	12	17
			13	96
80204	B1821BH025C100N	5305-00-225-3843	12	55
			13	81
80204	B1821BH025C125N	5305-00-068-0509	12	33
			17	32
80204	B1821BH031C100N	5306-00-226-4827	13	52
			19.1	10
80204	B1821BH038C062N	5305-01-458-1624	12	29
80204	B1821BH038C075N	5305-00-543-4372	17	28
80204	B1821BH038C100N	5305-00-068-0510	20	15
			23	21
			23.1	26
			24	4

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
80204	B1821BH038C125N	5305-00-068-0511	20	4
80204	B1821BH038C150N	5305-00-725-2317	23	3
80204	B1821BH038F063N	5305-00-269-3233	1	24
80204	B1821BH038F138N	5305-00-269-3239	21	46
			22	58
80204	B1821BH050C100N	5305-00-071-2066	23	17
80204	B1821BH050C300N	5305-00-071-2075	23	16
			23.1	4
80204	B1821BH063C475N	5305-00-724-7265	20	8
81343	B18231A03014	---	23.1	9
80204	B18231A10020N	5306-01-174-8738	18	76
			19.1	22
			23.1	16
80204	B18231A10025N	5306-01-179-1438	10.1	4
			12.1	11
			18	70
			19.1	12
			23.1	10
80204	B18231B10016N	5305-01-423-8236	18	33
80204	B18231B10025N	5305-01-380-3395	12	60
			18	5
			18	21
80204	B18231B5016N	---	18	53
80204	B18231B6020N	---	18	48
80204	B18231B8025N	---	23	9
80204	B18241A060	5310-01-220-6513	18	41
80204	B18241B050	5310-01-366-3540	18	51
80204	B18241B100	5310-01-366-3539	10	9
80204	B1831BH060014	---	18	37
80204	B1831BH060016	5305-01-392-8847	18	68
36156	B-718817-01	---	22	44
36156	B-718930-01	---	22	43
1C645	DIN73378-4x1.25-PA12-HL-nf	---	28	7
1C645	DIN73378-6x2-PA12-HL-sw	---	28	3
81349	F03A250V10AS	5920-00-243-3787	7	93
28818	FF40JM02	5640-01-386-9618	BULK	34
81348	FFS92TYPE3STYLE2C	5305-00-071-1319	6	9
81349	JANTX1N1190	5961-00-154-7046	22	35
81349	JANTX1N1190R	5961-01-067-9493	22	34
81343	J30R7-TYPE 1-3/16ID	4720-01-475-4828	28	8
81343	J30R7-TYPE 1-5/32ID	4710-01-475-4823	28	2
81343	J1508-10 TYPE D	5340-01-475-0054	28	1
81343	J1508-13 TYPE D	5340-01-475-0039	28	5
81349	M23053/5-104-0	5970-00-812-2969	8	37
			BULK	21
81349	M23053/5-105-0	5970-00-954-1622	BULK	20
81349	M23053/5-105-9	5970-00-082-3942	BULK	23
81349	M23053/5-108-9	5970-00-082-3948	BULK	22
81349	M23053/5-110-2	5970-00-978-7677	BULK	19
81349	M23053/5-110-9	5970-00-822-2775	BULK	18
81349	M24243/1A402	5320-01-019-5694	2	64
			3	45

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
			4	27
			9	29
81349	M27500-16TE1T14	6145-01-104-5076	BULK	3
81349	M27500-16TE2T14	6145-01-213-5495	BULK	2
81349	M27500-20TE2T14	6145-01-129-9955	BULK	4
81349	M27500-20TE3T14	6145-01-128-2979	BULK	5
81349	M3190/03-17-0	5970-01-367-0730	BULK	24
81349	M5086/2-10-9	6145-00-578-7513	BULK	40
81349	M5086/2-12-9	6145-00-578-7514	8	33
			15	23
81349	M5086/2-16-9	6145-00-578-6605	8	18
			15	37
			BULK	38
81349	M5086/2-20-9	6145-00-851-8505	8	15
			15	35
			BULK	37
81349	M5086/2-2-9	6145-00-578-6596	BULK	41
81349	M5086/2-8-9	6145-00-284-0657	15	22
			BULK	39
81349	MIL-R-6130TYII/GRA	9320-01-394-8045	BULK	27
96906	MS16624-1156	5365-00-803-7304	21	22
96906	MS16624-1300	5365-00-804-7654	22	47
96906	MS16998-75	5305-00-983-7449	20	1
96906	MS20066-352	5315-01-236-0612	21	36
96906	MS20066-354	5315-00-227-6415	21	39
			22	51
96906	MS20066-356	5315-00-847-3531	22	48
96906	MS20659-105	5940-00-114-1300	21	37
96906	MS20659-125	5940-00-113-3140	16	66
96906	MS20659-128	5940-00-113-9820	21	7
			22	12
96906	MS20659-129	5940-00-114-1314	15	6A
96906	MS20659-140	5940-00-115-0763	15	13
96906	MS20659-144	5940-00-115-2677	9	6
			17	2
96906	MS20659-165	5940-00-113-0954	21	8
			22	13
80205	MS21044N06	5310-00-081-8087	7	24
80205	MS21044N08	5310-00-811-3494	12	35
80205	MS21318-21	5305-00-253-5615	21	53
			22	66
80205	MS21333-117	5340-00-057-3026	18	35
80205	MS21333-126	5340-00-053-8994	18	23
80205	MS21333-75	5340-00-050-2740	9	18
96906	MS21333-76	5340-00-724-7038	9	17
			16	42
96906	MS25036-101	5940-00-813-0698	15	16
81343	MS25036-103	5940-00-143-4771	6	12
			15	12
			15	58
96906	MS25036-104	5940-00-504-4703	15	18

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
96906	MS25036-105	5940-00-143-4773	15	5
96906	MS25036-106	5940-00-283-5280	15	68
96906	MS25036-108	5940-00-143-4780	15	21
			15	57
96906	MS25036-109	5940-00-283-5281	8	4A
			15	48
			15	13A
96906	MS25036-110	5940-00-143-4793	15	6
96906	MS25036-112	5940-00-143-4794	15	10
96906	MS25036-113	5940-00-113-8183	15	20
96906	MS25036-116	5940-00-114-1305	15	6B
96906	MS25036-117	5940-00-114-1306	15	14
96906	MS25036-127	5940-00-113-8191	16	4
			16	8
			16	12
			16	15
96906	MS25036-128	5940-00-113-9831	16	16
			16	20
			16	24
			16	28
96906	MS25036-148	5940-00-113-9828	8	9
96906	MS25036-149	5940-00-557-1629	8	8
			8	109
96906	MS25036-150	5940-00-113-8184	8	3
			15	9
96906	MS25036-151	5940-00-113-8185	15	49
96906	MS25036-152	5940-00-615-6073	8	157
96906	MS25036-153	5940-00-143-4774	15	17
96906	MS25036-154	5940-00-230-0515	8	87
			8	102
			8	133
			22	32
96906	MS25036-157	5940-00-143-4777	22	49
96906	MS25036-158	5940-00-682-2445	15	15
96906	MS25041-5	6210-00-583-9349	6	7
96906	MS25043-18DA	5935-01-175-8419	7	54
			16	63
96906	MS25224-1	5930-00-615-6731	6	23
96906	MS25251-12	5935-00-565-9503	7	86
96906	MS25251-16	5935-00-823-5322	8	30
96906	MS25281-4	5340-01-302-2960	21	27
			22	39
96906	MS27183-13	5310-00-087-7493	21	45
			22	57
96906	MS3102R18-11P	5935-00-852-9611	8	32
			15	91
96906	MS3106F18-11S	5935-00-233-3990	7	83
96906	MS3367-1-9	5975-00-074-2072	7	82
			8	13
			12	48
			13	24
			13	59

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
			13	68
			15	26
			18	12
			18	43
			18	78
96906	MS3367-4-9	5975-00-727-5153	13	67
96906	MS3367-5-9	5975-00-111-3208	7	21
			8	12
			15	25
96906	MS3368-1-9A	5975-00-944-1499	8	14
			15	27
96906	MS3420-10	5365-00-663-2125	7	85
80205	MS35190-253	5305-00-059-4568	3	25
80205	MS35198-42	5305-00-954-5629	9	2
80205	MS35198-46	5305-00-954-5638	9	33
80205	MS35206-241	5305-00-984-6189	21	28
80205	MS35206-248	5305-00-984-6196	22	36
80205	MS35206-283	5305-00-988-1727	22	42
80205	MS35206-287	5305-00-988-1728	22	4
80205	MS35206-329	5305-00-150-3408	7	23
80205	MS35207-259	5305-00-993-1849	21	29
80205	MS35333-38	5310-00-559-0070	22	38
80205	MS35333-39	5310-00-576-5752	21	24
80205	MS35333-40	5310-00-550-1130	22	30
80205	MS35338-62	5310-00-274-8710	2	6
			3	2
			4	14
			5	4
			7	90
			13	56
80205	MS35338-63	5310-00-274-8715	2	19
			3	29
			4	8
			10	5
			11	8
			12	26
			13	19
			17	33
			18	25
			22	3
			22	27
			23	6
96906	MS35338-64	5310-00-011-6120	13	51
			21	15
80205	MS35338-65	5310-00-011-5093	1	25
			12	30
			20	2
80205	MS35338-65	5310-00-011-5093	24	2
96906	MS35338-67	5310-00-011-6121	22	19
			23	18
96906	MS35489-20	5325-00-174-9038	12	6

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
96906	MS35489-27	5325-00-290-1960	16	48
96906	MS35643-1	5330-00-684-7851	13	2
96906	MS35645-1	2590-00-141-9758	13	1
80205	MS35649-282	5310-00-934-9757	22	37
80205	MS35650-103	5310-00-988-2652	18	60
96906	MS35842-11	4730-00-908-3194	19	2
96906	MS51007-12	5330-00-914-7651	7	79
96906	MS51007-6	5330-00-079-7840	7	80
96906	MS51412-11	5310-01-242-2679	20	6
96906	MS51412-2	5310-01-234-9416	2	7
			3	3
			4	15
			5	5
			7	29
			13	57
			16	32
96906	MS51412-20	5310-01-307-7914	6	38
96906	MS51412-25	5310-00-044-6477	13	53
96906	MS51412-4	5310-01-103-6042	2	20
			3	32
			10	7
			11	10
			12	28
			13	21
			16	50
			16	69
			17	34
			18	27
			23	8
96906	MS51412-5	5310-01-234-9415	3	31
96906	MS51412-7	5310-01-257-7590	1	19
			10	11
			12	45
			18	59
			23	2
			24	3
96906	MS51412-8	5310-01-267-1685	13	4
96906	MS51412-9	5310-01-266-4641	23	14
96906	MS51481-06	5305-01-466-4406	12	34
96906	MS51492-14	5305-01-165-1254	13	55
96906	MS51493-2	5305-01-334-8683	2	48
			16	59
96906	MS51493-3	5305-01-406-1192	2	49
96906	MS51493-5	- - -	23	1
96906	MS51500A5-4	4730-00-620-6904	13	46
96906	MS51500A6	4730-00-995-1559	13	41
96906	MS51500B4-4Z	4730-01-309-6370	13	95
96906	MS51504A6	4730-00-812-7999	13	79
96906	MS51512-2	- - -	7	91
96906	MS51520A5	4730-01-123-8618	13	29
96906	MS51860-54Z	4730-01-343-3192	13	28
96906	MS51922-2	5310-00-929-1807	16	68

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
96906	MS51922-9	5310-00-984-3806	21	41
			22	53
96906	MS51937-5	5306-00-050-0347	21	50
96906	MS51937-7	5306-00-017-6143	22	63
96906	MS51943-13	5310-01-215-7311	20	5
			21	3
96906	MS51943-9	5310-01-231-7459	23	13
96906	MS51967-14	5310-00-768-0318	21	51
96906	MS51967-2	5310-00-761-6882	18	24
			22	29
			22	2
96906	MS51967-20	5310-00-763-8920	22	64
96906	MS51971-7	5310-00-764-6609	20	10
96906	MS521302A101360	4720-01-393-5581	BULK	13
96906	MS52412-5		4	9
96906	MS87006-11	4030-00-236-0843	12	10
96906	MS87006-13	4030-00-780-9350	9	5
80205	MS90725-110	5305-01-283-8664	22	18
80205	MS90725-15	5305-00-071-2236	3	41
96906	MS90725-3	5305-00-068-0500	21	2
			22	6
			22	31
80205	MS90725-34	5306-00-225-8499	21	14
80205	MS90725-43	5305-00-225-8507	21	42
			22	54
80205	MS90725-5	5305-00-068-0501	22	26
80205	MS90725-6	5305-00-068-0502	21	9
			22	14
80205	MS90726-58	5305-00-269-2801	21	44
			22	56
80205	MS91528-2K2B	5355-00-559-8943	6	10
18265	P00-2904	5340-01-071-8006	11	14
18265	P10-1870	5310-01-190-4614	11	16
18265	P12-028	- - -	11	19
18265	P12-0307	2940-01-103-3267	11	18
18265	P12-0316	- - -	11	15
59730	RBB25	5940-00-478-0037	7	95
81348	RR-C-271 TY2 CL7-16	4010-00-958-0633	BULK	8
80244	RR-C-271 TY2CL6	4010-01-365-6107	BULK	6
81343	SAE J1508	4730-00-024-3971	13	75
81343	SAE J1508-06	4730-00-908-3195	12	4
			13	11
81343	SAE-J1127	6145-01-422-4370	BULK	36
18265	SMP18-1072	2940-01-103-3268	11	17
03007	Z60960	5340-01-379-0688	BULK	10
1X968	ZX-4134	5330-01-369-8947	BULK	28

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
1	1	5940-00-549-6583	58536	AA-52425-2
1	2	5940-00-549-6581	58536	A52425-1
1	3	6150-01-494-3984	30554	88-22123
1	4	5940-01-369-2872	30554	88-22119-14
1	5	---	30554	88-22123-3
1	6	---	30554	88-22123-1
1	7	6140-01-418-6342	30554	88-22179
1	8	5940-01-369-2872	30554	88-22119-14
1	9	---	30554	88-22179-3
1	10	---	30554	88-22179-4
1	11	---	30554	88-22179-1
1	12	6150-01-494-3983	30554	88-22310
1	13	5940-01-369-2872	30554	88-22119-14
1	14	---	30554	88-22310-3
1	15	---	30554	88-22310-4
1	16	---	30554	88-22310-1
1	17	5999-01-382-8223	30554	88-20188
1	18	5310-00-913-8881	30554	13218E0320-293
1	19	5310-01-257-7590	96906	MS51412-7
1	20	6160-01-480-5918	30554	88-21684
1	21	5306-01-366-4527	30554	88-21685
1	22	6140-01-446-9498	19207	6TMF/TYPEI
1	22	6140-01-457-4339	30554	88-22800
1	23	6160-01-553-5219	30554	88-21683
1	24	5305-00-269-3233	80204	B1821BH038F063N
1	25	5310-00-011-5093	80205	MS35338-65
1	26	6150-01-494-3982	30554	88-22309
1	27	5940-01-369-2872	30554	88-22119-14
1	28	5940-00-581-4325	30554	88-22119-22
1	29	---	30554	88-22309-3
1	30	---	30554	88-22309-1
1	31	6150-01-494-3985	30554	88-22311
1	32	5940-01-369-2872	30554	88-22119-14
1	33	5940-01-369-2268	30554	88-22119-11
1	34	---	30554	88-22311-4
1	35	---	30554	88-22311-5
1	36	---	30554	88-22311-1
1	37	5310-01-012-3595	30554	69-561-6
1	38	5306-01-156-7663	30554	88-20260-21
1	39	5935-01-044-8382	19207	11682345
2	1	5310-00-063-7360	30554	69-561-2
2	2	5305-00-036-6972	30554	69-662-20
2	3	5340-01-532-0643	30554	88-20278
2	4	---	30554	88-21604-295
2	4	---	30554	97-24604-295
2	4	---	30554	88-21605-295
2	4	---	30554	97-24605-295
2	5	5305-01-365-6313	30554	88-20260-23
2	6	5310-00-274-8710	80205	MS35338-62
2	7	5310-01-234-9416	96906	MS51412-2
2	8	5310-01-012-3595	30554	69-561-6
2	9	5306-01-156-7663	30554	88-20260-21

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
2	10	---	30554	88-20277
2	11	---	30554	88-20276
2	12	---	30554	88-21870
2	13	5305-01-464-6667	30554	88-22793-4
2	14	---	30554	88-21877
2	15	5340-01-379-0893	30554	88-21099
2	16	---	30554	88-21604-356
2	16	---	30554	97-24604-356
2	16	---	30554	88-21605-356
2	16	---	30554	97-24605-356
2	17	5340-01-528-9207	30554	88-21875
2	18	5310-01-466-6312	30554	88-22790-1
2	19	5310-00-274-8715	80205	MS35338-63
2	20	5310-01-103-6042	96906	MS51412-4
2	21	5305-01-531-4346	30554	88-20260-31
2	22	---	30554	88-22077
2	23	5305-01-466-9756	30554	88-22791-1
2	24	---	30554	88-20123
2	25	---	30554	88-22501
2	26	5340-01-533-0084	30554	88-22472
2	27	---	30554	88-22500
2	28	---	30554	88-22088
2	29	---	30554	88-22089
2	30	---	30554	88-22070
2	31	---	30554	88-21585
2	31	---	30554	97-24138
2	32	---	30554	88-21820
2	33	---	30554	88-21771
2	34	---	30554	88-22738
2	35	5340-01-368-6048	30554	88-21098
2	36	5340-01-392-8822	30554	88-21890
2	37	5310-00-822-8525	30554	88-20052
2	38	5307-01-374-4451	30554	88-22626
2	39	5325-01-301-7903	30554	88-20050
2	40	---	30554	88-21732
2	41	---	30554	88-21733
2	42	---	30554	88-22666
2	43	---	30554	88-22063
2	44	---	30554	88-22478
2	45	5310-01-406-1672	30554	88-21930-4
2	46	5365-01-431-4540	30554	88-22483
2	47	5365-01-431-4603	30554	88-22482
2	48	5305-01-334-8683	96906	MS51493-2
2	49	5305-01-406-1192	96906	MS51493-3
2	50	---	30554	88-20461
2	51	---	30554	88-22479
2	52	---	30554	88-22474
2	53	---	30554	88-22476
2	54	---	30554	88-22475
2	55	5306-01-368-8041	30554	88-20260-20
2	56	5340-01-531-7746	30554	88-20014

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
2	57	---	30554	88-20013
2	58	5305-00-211-9344	30554	69-662-17
2	59	5340-01-396-0454	30554	88-20252
2	60	---	30554	88-21998
2	61	---	30554	88-21814
2	62	5340-01-535-0248	30554	88-21815
2	63	---	30554	88-21813
2	64	5320-01-019-5694	81349	M24243/1A402
2	65	---	30554	88-21635
2	65	---	30554	88-22078
2	65	---	30554	97-24053
2	66	---	30554	88-22211
2	66	---	30554	97-24052
2	67	---	30554	88-20110
2	68	---	30554	88-20126
2	69	---	30554	88-22210
2	69	---	30554	97-24051
2	70	---	30554	88-22480
2	71	---	30554	88-21603
2	72	---	30554	97-24124
2	73	---	30554	97-24130
2	74	---	30554	97-24137
2	75	---	30554	97-24131
2	76	---	30554	97-24128
2	77	---	30554	97-24129
2	78	---	30554	97-24132
3	1	5305-01-365-6313	30554	88-20260-23
3	2	5310-00-274-8710	80205	MS35338-62
3	3	5310-01-234-9416	96906	MS51412-2
3	4	5340-01-367-8956	30554	88-22430
3	5	2990-01-389-3003	30554	88-22429
3	6	5306-01-156-7663	30554	88-20260-21
3	7	5310-00-903-8595	30554	88-21674-2
3	8	---	30554	88-21598
3	9	---	30554	88-21988
3	10	5310-01-012-3595	30554	69-561-6
3	11	---	30554	88-22116
3	12	---	30554	88-21962
3	13	---	30554	88-21600
3	14	---	30554	88-22513
3	15	---	30554	88-22528
3	16	---	30554	88-22702
3	17	---	30554	88-22510
3	18	---	30554	88-21928
3	19	---	30554	88-21596
3	20	---	30554	88-21601
3	21	---	30554	88-22512
3	22	---	30554	88-21604-317
3	22	---	30554	97-24604-317
3	22	---	30554	88-21605-317
3	22	---	30554	97-24605-317
3	23	5320-01-366-4394	30554	88-20210

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
3	24	---	30554	88-22595
3	25	5305-00-059-4568	80205	MS35190-253
3	26	5310-01-396-5836	30554	88-21930-3
3	27	---	30554	88-22667
3	28	5310-01-466-6312	30554	88-22790-1
3	29	5310-00-274-8715	80205	MS35338-63
3	30	5305-01-531-4346	30554	88-20260-31
3	31	5310-01-234-9415	96906	MS51412-5
3	32	5310-01-103-6042	96906	MS51412-4
3	33	5306-01-366-7075	30554	88-20260-33
3	34	5340-00-297-0312	30554	88-21674-3
3	35	---	30554	88-21913
3	36	---	30554	88-21694
3	37	---	30554	88-22051
3	38	---	30554	88-22514
3	39	---	30554	88-21952
3	40	5975-00-878-3791	58536	AA55804-3B 9FT
3	41	5305-00-071-2236	80205	MS90725-15
3	42	---	30554	88-21889
3	43	---	30554	88-21590
3	44	---	30554	88-22032
3	45	5320-01-019-5694	81349	M24243/1A402
3	46	---	30554	88-20063-05
3	46	---	30554	88-20063-06
3	46	---	30554	97-24050-01
3	46	---	30554	97-24050-02
3	47	---	30554	88-20075
3	48	---	30554	88-21821-01
3	48	---	30554	88-21821-02
4	1	5310-01-012-3595	30554	69-561-6
4	2	5306-01-156-7663	30554	88-20260-21
4	3	5320-01-366-4394	30554	88-20210
4	4	---	30554	88-22072
4	5	---	30554	88-22594
4	6	---	30554	88-22661
4	7	5306-01-366-7075	30554	88-20260-33
4	8	5310-00-274-8715	80205	MS35338-63
4	9	---	96906	MS52412-5
4	10	---	30554	88-21925
4	11	5340-00-297-0312	30554	88-21674-3
4	12	5310-00-903-8595	30554	88-21674-2
4	13	5305-01-365-6313	30554	88-20260-23
4	14	5310-00-274-8710	80205	MS35338-62
4	15	5310-01-234-9416	96906	MS51412-2
4	16	5310-01-466-6312	30554	88-22790-1
4	17	5305-01-056-1501	30554	88-20260-32
4	18	5340-01-157-9475	30554	69-583
4	19	5975-00-257-8055	30554	69-570-3
4	20	2920-01-388-2776	30554	88-20218
4	21	---	30554	88-21964
4	22	---	30554	88-21977

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
4	23	---	30554	88-22074
4	24	---	30554	88-22040
4	25	5340-01-528-8654	30554	88-21770
4	26	---	30554	88-22037
4	27	5320-01-019-5694	81349	M24243/1A402
4	28	9905-01-377-5094	30554	88-20102
4	29	---	30554	88-21723
4	30	5305-00-038-3103	30554	69-662-35
4	31	5310-00-052-3632	97403	13214E3291-3
5	1	5310-01-012-3595	30554	69-561-6
5	2	5306-01-156-7663	30554	88-20260-21
5	3	5305-01-365-6313	30554	88-20260-23
5	4	5310-00-274-8710	80205	MS35338-62
5	5	5310-01-234-9416	96906	MS51412-2
5	6	6110-01-397-2108	30554	88-22137
5	6	---	30554	97-24080
5	6	6110-01-383-4531	30554	88-22138
5	6	---	30554	97-24081
6	1	6240-00-155-7878	30554	69-594
6	2	6210-00-935-6919	30554	69-593
6	3	6240-01-466-3528	96906	A50452-1
6	4	6210-00-831-8247	30554	88-21124
6	5	5980-01-076-8659	30554	88-21899
6	6	5980-01-198-6311	30554	88-21898
6	7	6210-00-583-9349	96906	MS25041-5
6	8	5310-00-063-7360	30554	69-561-2
6	9	5305-00-071-1319	81348	FFS92TYPE3STYLE2C
6	10	5355-00-559-8943	80205	MS91528-2K2B
6	11	5961-01-470-4673	30554	88-22418-2
6	12	5940-00-143-4771	81343	MS25036-103
6	13	---	30554	88-22418-2-2
6	14	5961-00-295-5757	50434	1901-0759
6	15	5930-01-368-5160	30554	01-20002
6	16	---	30554	88-22137-105
6	17	---	30554	88-22629-078
6	18	---	30554	88-22629-079
6	19	---	30554	88-22629-080
6	20	5905-00-539-2573	30554	88-22773-1
6	21	5930-01-499-3684	30554	96-23737
6	22	5930-01-368-2891	30554	88-21078
6	23	5930-00-615-6731	96906	MS25224-1
6	24	5930-01-368-2893	30554	88-20176
6	25	5930-01-385-1894	30554	01-20003
6	26	5930-01-366-0048	30554	88-22141
6	27	5905-00-556-5306	30554	88-22773-2
6	27	5905-01-236-4041	30554	88-22773-3
6	28	5340-01-107-7559	30554	88-22555
6	29	6625-00-869-3144	30554	69-599
6	30	6625-01-366-0193	30554	88-21103
6	31	6685-01-369-6549	30554	88-21105
6	32	6620-01-368-1531	30554	88-21104
6	33	6645-00-089-8842	30554	73-0507

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
6	34	6625-00-869-3141	30554	69-574
6	35	6625-01-366-0192	30554	88-21072
6	35	6625-01-368-7973	30554	88-21073
6	36	6625-00-004-8066	30554	69-597
6	36	6625-00-081-5840	30554	69-598
6	37	6625-00-003-0975	30554	70-4012
6	38	5310-01-307-7914	96906	MS51412-20
7	1	5905-00-539-2479	30554	88-20592-1
7	2	5930-01-368-2892	30554	88-22580
7	3	---	30554	01-21506-1
7	3	---	30554	01-21506-2
7	4	NOT USED		
7	5	NOT USED		
7	6	5905-01-336-7533	30554	88-21676-1
7	7	5930-01-365-9613	30554	88-21080
7	8	5925-00-089-3031	30554	88-21155
7	9	5920-00-539-6920	30554	88-20147-1
7	9	5925-00-068-3931	30554	97-24110
7	10	5920-00-892-9311	30554	88-20575
7	11	---	30554	88-22137-105
7	12	---	30554	88-22629-041
7	13	---	30554	88-22629-040
7	14	5305-01-187-5878	30554	69-662-65
7	15	---	30554	88-21593
7	15	---	30554	97-24120
7	15	---	30554	88-21976
7	15	---	30554	97-24121
7	16	5310-01-366-8134	30554	88-21674-1
7	17	5310-00-063-7360	30554	69-561-2
7	18	5305-00-036-6972	30554	69-662-20
7	19	5975-00-417-0543	30554	70-1580
7	20	5935-01-367-7814	30554	88-20251
7	21	5975-00-111-3208	96906	MS3367-5-9
7	22	5925-01-381-5199	60177	29100
7	22	5925-01-493-9106	30554	88-22825-2
7	22	5925-01-466-8153	30554	88-22826-2
7	22	5925-01-365-9757	60177	19450-2
7	23	5305-00-150-3408	80205	MS35206-329
7	24	5310-00-081-8087	80205	MS21044N06
7	25	5940-01-259-2190	30554	88-20274-11
7	26	5940-01-110-6423	30554	88-20274-5
7	27	5310-00-052-3632	30554	69-561-3
7	28	5306-01-156-7663	30554	88-20260-21
7	29	5310-01-234-9416	96906	MS51412-2
7	30	6625-01-381-7445	30554	88-21142
7	31	6695-01-368-7114	30554	88-21134
7	31	6695-01-369-9312	30554	88-21135
7	32	NOT USED		
7	33	5305-00-038-3145	30554	69-662-37
7	34	6625-01-381-8195	30554	88-21165
7	35	5945-01-366-2725	30554	88-21138

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
7	36	5945-01-366-2726	30554	88-21141
7	37	5945-00-458-3351	30554	88-21085
7	38	5342-01-078-9038	30554	88-22768
7	39	5935-01-114-5354	30554	88-22672
7	40	5340-01-078-9038	30554	88-22768
7	41	5970-01-280-0362	30554	88-22767
7	42	5945-01-365-9954	30554	88-21896
7	42	5945-01-369-0791	30554	88-22463
7	43	---	30554	88-21897-2
7	44	5305-00-038-3103	30554	69-662-35
7	45	5340-01-470-2973	30554	88-20258
7	46	---	30554	88-22629-021
7	47	6695-01-367-9722	30554	88-21133
7	48	5945-01-366-2727	30554	88-21145
7	49	5945-01-366-2728	30554	88-21140
7	50	2910-01-368-7644	30554	88-21860
7	50	---	30554	97-24134
7	50	2910-01-371-4356	30554	88-21861
7	51	NOT USED		
7	52	NOT USED		
7	53	NOT USED		
7	54	5935-01-175-8419	96906	MS25043-18DA
7	55	6110-01-363-0493	30554	01-21501-1
7	55	6110-01-379-7187	30554	01-21501-2
7	55	6110-01-368-7123	30554	01-21507-1
7	56	5305-00-218-4864	30554	69-662-22
7	57	5940-01-531-5660	30554	88-21182-22
7	58	---	30554	88-21182-12
7	59	5999-01-366-2621	30554	88-21183-2
7	60	6625-01-367-8436	30554	88-21144
7	61	---	30554	88-22106
7	62	5310-00-836-3520	30554	69-561-1
7	63	5305-00-224-1092	30554	69-662-5
7	64	5905-01-368-2538	30554	88-20262
7	65	5905-01-365-6585	30554	88-20263
7	66	5905-01-368-2539	30554	88-20265
7	67	5905-01-366-7074	30554	88-20266
7	68	5905-01-368-2540	30554	88-20267
7	69	5961-00-295-5757	50434	1901-0759
7	70	5305-01-365-9390	30554	88-20299
7	71	5940-00-954-3558	30554	88-20272
7	72	---	30554	88-22106-11
7	73	---	30554	88-21971
7	74	5305-01-187-5878	30554	69-662-65
7	75	5310-00-836-3520	30554	69-561-1
7	76	5305-00-224-1092	30554	69-662-5
7	77	5305-01-204-4683	30554	69-662-7
7	78	NOT USED		
7	79	5330-00-914-7651	96906	MS51007-12
7	80	5330-00-079-7840	96906	MS51007-6
7	81	6150-01-406-9533	30554	88-22209
7	82	5975-00-074-2072	96906	MS3367-1-9

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
7	83	5935-00-233-3990	96906	MS3106F18-11S
7	84	---	30554	88-22209-7
7	85	5365-00-663-2125	96906	MS3420-10
7	86	5935-00-565-9503	96906	MS25251-12
7	87	---	30554	88-21995
7	88	5305-00-218-4864	30554	69-662-22
7	89	5306-01-156-7663	30554	88-20260-21
7	90	5310-00-274-8710	80205	MS35338-62
7	91	---	96906	MS51512-2
7	92	5310-01-012-3595	30554	69-561-6
7	93	5920-00-243-3787	81349	F03A250V10AS
7	94	5920-01-396-1989	75915	150145
7	95	5940-00-478-0037	59730	RBB25
7	96	6150-01-383-6511	30554	88-22303
7	96	6150-01-384-0013	30554	88-22664
7	96	---	30554	97-24049
7	96	---	30554	97-24060
8	1	6150-01-383-6511	30554	88-22303
8	1	6150-01-384-0013	30554	88-22664
8	1	---	30554	97-24049
8	1	---	30554	97-24060
8	2	5940-01-425-2020	30554	88-20274-1
8	2	5940-01-425-2020	30554	88-20274-1
8	3	5940-00-113-8184	96906	MS25036-150
8	4	5940-01-531-6448	30554	88-20274-3
8	4A	5940-00-283-5281	96906	MS25036-109
8	5	5940-01-369-2270	30554	88-20274-4
8	6	5940-01-110-6423	30554	88-20274-5
8	7	5940-01-367-9569	30554	88-20274-6
8	8	5940-00-557-1629	96906	MS25036-149
8	9	5940-00-113-9828	96906	MS25036-148
8	10	5940-01-368-6774	30554	88-22071
8	11	5940-01-259-2190	30554	88-20274-11
8	12	5975-00-111-3208	96906	MS3367-5-9
8	13	5975-00-074-2072	96906	MS3367-1-9
8	14	5975-00-944-1499	96906	MS3368-1-9A
8	15	6145-00-851-8505	81349	M5086/2-20-9
8	16	5999-01-366-2621	30554	88-21183-2
8	17	---	30554	88-21181-12
8	18	6145-00-578-6605	81349	M5086/2-16-9
8	19	5940-01-531-6040	30554	88-21181-22
8	20	5310-00-836-3520	30554	69-561-1
8	21	5305-01-367-2314	30554	69-662-11
8	22	5935-01-312-7038	30554	88-22312
8	23	5999-01-366-5119	30554	88-21941
8	24	5999-01-463-4017	30554	88-21943
8	25	5935-01-014-7861	30554	88-21939
8	26	5935-01-104-6137	30554	88-22313
8	27	5935-01-102-0366	30554	88-21981
8	28	5935-01-367-4422	30554	88-21084
8	29	5935-01-383-2612	30554	88-21897-1

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
8	30	5935-00-823-5322	96906	MS25251-16
8	31	5935-01-102-7124	19207	12258941
8	32	5935-00-852-9611	96906	MS3102R18-11P
8	33	6145-00-578-7514	81349	M5086/2-12-9
8	34	5999-01-320-7853	30554	88-21730
8	35	5935-01-366-9934	30554	88-21729
8	36	5961-00-295-5757	50434	1901-0759
8	37	5970-00-812-2969	81349	M23053/5-104-0
8	38	---	30554	88-22098-1
8	39	---	30554	88-22098-1-1
8	40	5940-01-425-2020	30554	88-20274-1
8	41	5940-01-135-7081	30554	88-20596-2
8	42	---	30554	88-22629-004
8	43	---	30554	88-22629-002
8	44	---	30554	88-22629-005
8	45	---	30554	88-22098-2
8	46	---	30554	88-22098-2-1
8	47	5940-01-425-2020	30554	88-20274-1
8	48	5940-01-135-7081	30554	88-20596-2
8	49	---	30554	88-22629-006
8	50	---	30554	88-22629-007
8	51	---	30554	88-22629-008
8	52	---	30554	88-22098-3
8	53	---	30554	88-22098-3-1
8	54	5940-01-425-2020	30554	88-20274-1
8	55	5940-01-135-7081	30554	88-20596-2
8	56	---	30554	88-22629-009
8	57	---	30554	88-22629-010
8	58	---	30554	88-22629-011
8	59	---	30554	88-22099-1
8	60	---	30554	88-22099-1-1
8	61	5999-01-463-4017	30554	88-21943
8	62	5940-01-110-6423	30554	88-20274-5
8	63	5940-01-531-5519	30554	88-20596-1
8	64	5940-01-425-2020	30554	88-20274-1
8	65	---	30554	88-22629-012
8	66	---	30554	88-22629-013
8	67	---	30554	88-22099-2
8	68	---	30554	88-22099-2-1
8	69	5940-01-110-6423	30554	88-20274-5
8	70	5940-01-531-5519	30554	88-20596-1
8	71	5940-01-367-9569	30554	88-20274-6
8	72	5940-01-369-2270	30554	88-20274-4
8	73	---	30554	88-22629-014
8	74	---	30554	88-22629-015
8	75	---	30554	88-22099-3
8	76	---	30554	88-22099-3-1
8	77	5940-01-110-6423	30554	88-20274-5
8	78	5940-01-531-5519	30554	88-20596-1
8	79	5940-01-425-2020	30554	88-20274-1
8	80	---	30554	88-22629-016
8	81	---	30554	88-22629-017

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
8	82	---	30554	88-22099-7
8	83	---	30554	88-22099-7-1
8	84	5940-01-110-6423	30554	88-20274-5
8	85	5940-01-531-5519	30554	88-20596-1
8	86	5940-01-367-9569	30554	88-20274-6
8	87	5940-00-230-0515	96906	MS25036-154
8	88	---	30554	88-22629-019
8	89	---	30554	88-22629-024
8	90	---	30554	88-22099-5
8	91	---	30554	88-22099-5-1
8	92	5940-01-110-6423	30554	88-20274-5
8	93	5940-01-531-5519	30554	88-20596-1
8	94	5940-01-425-2020	30554	88-20274-1
8	95	---	30554	88-22629-020
8	96	---	30554	88-22629-021
8	97	---	30554	88-22099-6
8	98	---	30554	88-22099-6-1
8	99	5940-01-110-6423	30554	88-20274-5
8	100	5940-01-531-5519	30554	88-20596-1
8	101	5940-01-425-2020	30554	88-20274-1
8	102	5940-00-230-0515	96906	MS25036-154
8	103	---	30554	88-22629-022
8	104	---	30554	88-22629-023
8	105	---	30554	88-22100
8	106	---	30554	88-22100-1
8	107	5940-01-110-6423	30554	88-20274-5
8	108	5940-01-531-5519	30554	88-20596-1
8	109	5940-00-557-1629	96906	MS25036-149
8	110	---	30554	88-22629-025
8	111	---	30554	88-22629-026
8	112	---	30554	88-22101-1
8	113	---	30554	88-22101-1-1
8	114	5940-01-110-6423	30554	88-20274-5
8	115	5940-01-531-5519	30554	88-20596-1
8	116	5940-01-425-2020	30554	88-20274-1
8	117	---	30554	88-22629-027
8	118	---	30554	88-22629-028
8	119	---	30554	88-22629-029
8	120	---	30554	88-22101-2
8	121	---	30554	88-22101-2-1
8	122	5940-01-110-6423	30554	88-20274-5
8	123	5940-01-531-5519	30554	88-20596-1
8	124	5940-01-425-2020	30554	88-20274-1
8	125	---	30554	88-22629-030
8	126	---	30554	88-22629-031
8	127	---	30554	88-22629-032
8	128	---	30554	88-22101-3
8	129	---	30554	88-22101-3-1
8	130	5940-01-531-5519	30554	88-20596-1
8	131	5999-01-463-4017	30554	88-21943
8	132	5940-01-367-9569	30554	88-20274-6

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
8	133	5940-00-230-0515	96906	MS25036-154
8	134	5940-01-369-2270	30554	88-20274-4
8	135	---	30554	88-22629-033
8	136	---	30554	88-22629-034
8	137	---	30554	88-22629-035
8	138	---	30554	88-221014
8	139	---	30554	88-22101-4-1
8	140	5940-01-110-6423	30554	88-20274-5
8	141	5940-01-531-5519	30554	88-20596-1
8	142	5940-01-425-2020	30554	88-20274-1
8	143	---	30554	88-22629-036
8	144	---	30554	88-22629-037
8	145	---	30554	88-22629-038
8	146	---	30554	88-22101-5
8	147	---	30554	88-22101-5-1
8	148	5940-01-110-6423	30554	88-20274-5
8	149	5940-01-531-5519	30554	88-20596-1
8	150	5940-01-425-2020	30554	88-20274-1
8	151	---	30554	88-22629-039
8	152	---	30554	88-22629-040
8	153	---	30554	88-22629-041
8	154	---	30554	88-22102-1
8	155	---	30554	88-22102-1-1
8	156	5940-01-531-5519	30554	88-20596-1
8	157	5940-00-615-6073	96906	MS25036-152
8	158	5940-01-110-6423	30554	88-20274-5
8	159	5940-01-425-2020	30554	88-20274-1
8	160	---	30554	88-22102-1-12
8	161	---	30554	88-22629-053
8	162	---	30554	88-22629-054
8	163	---	30554	88-22629-055
8	164	---	30554	88-22102-2
8	165	---	30554	88-22102-2-1
8	166	5940-01-531-5519	30554	88-20596-1
8	167	5940-01-110-6423	30554	88-20274-5
8	168	5999-01-463-4017	30554	88-21943
8	169	5999-01-366-5119	30554	88-21941
8	170	5940-01-369-2270	30554	88-20274-4
8	171	---	30554	88-22629-056
8	172	---	30554	88-22629-057
8	173	---	30554	88-22629-058
8	174	---	30554	88-22102-3
8	175	---	30554	88-22102-3-1
8	176	5940-01-531-5519	30554	88-20596-1
8	177	5940-01-110-6423	30554	88-20274-5
8	178	5940-01-425-2020	30554	88-20274-1
8	179	5999-01-463-4017	30554	88-21943
8	180	5999-01-366-5119	30554	88-21941
8	181	---	30554	88-22629-059
8	182	---	30554	88-22629-060
8	183	---	30554	88-22629-061
8	184	---	30554	88-22104

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
8	185	---	30554	88-22104-1
8	186	5940-01-425-2020	30554	88-20274-1
8	187	5940-01-136-0953	30554	88-20596-3
8	188	5940-01-369-2270	30554	88-20274-4
8	189	---	30554	88-22629-077
8	190	---	30554	88-22629-078
8	191	---	30554	88-22629-079
8	192	---	30554	88-22629-080
8	193	---	30554	88-22630
8	194	---	30554	88-22630-1
8	195	---	30554	88-22630-2
8	196	5999-01-463-4017	30554	88-21943
8	197	5940-01-135-7081	30554	88-20596-2
8	198	5940-01-531-5519	30554	88-20596-1
8	199	5940-01-110-6423	30554	88-20274-5
8	200	5940-01-425-2020	30554	88-20274-1
8	201	5999-01-366-5119	30554	88-21941
8	202	---	30554	88-22629-085
8	203	---	30554	88-22629-082
8	204	---	30554	88-22629-086
8	205	---	30554	88-22629-084
8	206	5999-01-092-2655	30554	88-20476
8	207	---	30554	88-20473
8	208	---	30554	97-24133
8	209	---	30554	88-20574-2
8	210	5940-01-110-6423	30554	88-20274-5
8	211	5940-01-531-5519	30554	88-20596-1
8	212	5940-01-425-2020	30554	88-20274-1
8	213	---	30554	88-22629-087
8	214	---	30554	88-22629-040
8	215	---	30554	88-22629-041
8	216	5940-01-259-2190	30554	88-20274-11
9	1	5310-00-052-3632	30554	69-561-3
9	2	5305-00-954-5629	80205	MS35198-42
9	3	---	30554	88-22120
9	4	---	30554	88-22120-4
9	5	4030-00-780-9350	96906	MS87006-13
9	6	5940-00-115-2677	96906	MS20659-144
9	7	---	30554	88-22120-2
9	8	5310-00-822-8525	30554	88-20052
9	9	5310-01-365-4381	30554	88-20242
9	10	5325-01-161-2654	30554	88-20051
9	11	5310-01-012-3595	30554	69-561-6
9	12	5306-01-156-7663	30554	88-20260-21
9	13	5310-00-903-8595	30554	88-21674-2
9	14	---	30554	88-21868
9	15	---	30554	88-21869
9	16	5325-01-301-7903	30554	88-20050
9	17	5340-00-724-7038	96906	MS21333-76
9	18	5340-00-050-2740	80205	MS21333-75
9	19	---	30554	88-21980

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
9	20	---	30554	88-22042
9	21	---	30554	88-21876
9	22	5310-00-063-7360	30554	69-561-2
9	23	5305-01-467-1561	30554	88-22791-2
9	24	---	30554	88-21874
9	25	---	30554	88-21873
9	26	---	30554	88-21871
9	27	---	30554	88-22772
9	28	---	30554	88-22774
9	29	5320-01-019-5694	81349	M24243/1A402
9	30	---	30554	88-20074
9	31	9905-01-372-7986	30554	88-20197
9	32	---	30554	88-20073
9	32	---	30554	88-22737
9	33	5305-00-954-5638	80205	MS35198-46
10	1	5340-01-367-1503	30554	88-21975
10	2	4730-01-470-1578	30554	88-20561-6
10	3	2990-01-369-2079	30554	88-21959
10	4	5310-01-466-6312	30554	88-22790-1
10	5	5310-00-274-8715	80205	MS35338-63
10	6	5305-01-531-4346	30554	88-20260-31
10	7	5310-01-103-6042	96906	MS51412-4
10	8	2990-01-390-4457	30554	88-21712
10	9	5310-01-366-3539	80204	B18241B100
10	10	5310-01-368-3048	30554	88-22331-2
10	11	5310-01-257-7590	96906	MS51412-7
10	12	2990-01-374-9149	30554	88-22183
10	13	5330-01-368-5932	30554	88-22182
10.1	1	4730-00-089-2515	81343	4-130109E-C
10.1	2	---	30554	97-24021
10.1	3	---	30554	97-24111-9
10.1	4	5306-01-179-1438	80204	B18231A10025N
10.1	5	5310-01-099-9532	30554	88-22331-1
10.1	6	5310-01-531-4937	30554	88-20033-24A
10.1	7	4730-01-470-1595	30554	88-20561-4
10.1	8	---	30554	97-24022
10.1	9	4730-01-470-1567	30554	88-20561-3
10.1	10	---	30554	97-24029
10.1	11	---	30554	97-24028
10.1	12	---	30554	97-24030
10.1	13	5305-01-369-2166	30554	88-20260-30
10.1	14	---	30554	88-20556-38
10.1	15	---	30554	88-20033-21A
10.1	16	---	30554	97-24020
11	1	4730-01-470-1595	30554	88-20561-4
11	2	4730-01-470-1423	30554	88-20561-5
11	3	4720-01-375-1929	30554	88-21177-1
11	4	4710-01-392-8846	30554	88-22301
11	5	4720-01-366-6257	30554	88-22300
11	6	2940-01-531-4912	30554	88-21127
11	7	5310-01-466-6312	30554	88-22790-1
11	8	5310-00-274-8715	80205	MS35338-63

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
11	9	5305-01-056-1501	30554	88-20260-32
11	10	5310-01-103-6042	96906	MS51412-4
11	11	---	30554	88-21743
11	11	---	30554	97-24042
11	12	5340-01-074-8126	30554	88-21129
11	13	---	30554	88-21065
11	14	5340-01-071-8006	18265	P00-2904
11	15	---	18265	P12-0316
11	16	5310-01-190-4614	18265	P10-1870
11	17	2940-01-103-3268	18265	SMP18-1072
11	18	2940-01-103-3267	18265	P12-0307
11	19	---	18265	P12-028
12	1	4730-01-470-1595	30554	88-20561-4
12	2	4720-01-374-0783	30554	88-22170
12	3	---	30554	88-21604-228
12	3	---	30554	97-24604-228
12	3	---	30554	88-21605-228
12	3	---	30554	97-24605-228
12	4	4730-00-908-3195	81343	SAE J1508-06
12	5	---	30554	88-22302-12
12	6	5325-00-174-9038	96906	MS35489-20
12	7	5310-01-012-3595	30554	69-561-6
12	8	5306-01-156-7663	30554	88-20260-21
12	9	---	30554	88-21849
12	10	4030-00-236-0843	96906	MS87006-11
12	11	---	30554	88-21604-272
12	11	---	30554	97-24604-272
12	11	---	30554	88-21605-272
12	11	---	30554	97-24605-272
12	12	5340-01-368-6063	30554	88-22533
12	13	4730-01-470-1567	30554	88-20561-3
12	14	4720-01-385-1102	30554	88-22171
12	15	4720-01-368-5430	30554	88-22172
12	16	4730-01-370-5426	30554	88-22554-2
12	17	5305-00-068-0508	80204	B1821BH025C075N
12	18	---	30554	88-22302-4
12	19	---	30554	88-22302-6
12	20	---	30554	88-22752-3
12	21	4730-01-531-4884	30554	88-22323
12	22	4730-01-378-5224	30554	88-22554-3
12	23	---	30554	88-22752-2
12	24	4820-01-381-5079	30554	88-22751
12	25	5310-01-466-6312	30554	88-22790-1
12	26	5310-00-274-8715	80205	MS35338-63
12	27	5305-01-056-1501	30554	88-20260-32
12	28	5310-01-103-6042	96906	MS51412-4
12	29	5305-01-458-1624	80204	B1821BH038C062N
12	30	5310-00-011-5093	80205	MS35338-65
12	31	---	30554	88-21700
12	32	---	30554	88-22424
12	33	5305-00-068-0509	80204	B1821BH025C125N

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
12	34	5305-01-466-4406	96906	MS51481-06
12	35	5310-00-811-3494	80205	MS21044N08
12	36	---	30554	88-22727
12	37	---	30554	88-21604-364
12	37	---	30554	88-21605-364
12	38	---	30554	88-22729
12	39	2930-01-466-8474	30554	88-22668
12	40	---	30554	88-22725
12	41	---	30554	88-22726
12	42	---	30554	88-22728
12	43	4140-01-466-8879	30554	88-21695
12	44	5310-01-466-6687	30554	88-22790-3
12	45	5310-01-257-7590	96906	MS51412-7
12	46	2930-01-368-1071	30554	88-22167
12	47	5365-01-381-3773	30554	88-22703
12	48	5975-00-074-2072	96906	MS3367-1-9
12	49	---	30554	88-22723
12	50	---	30554	88-21604-317
12	50	---	30554	88-21605-317
12	51	---	30554	88-22724
12	52	---	30554	88-22722
12	53	3030-01-463-9774	30554	88-22740
12	54	4140-01-507-4176	30554	88-22490
12	55	5305-00-225-3843	80204	B1821BH025C100N
12	56	---	30554	88-22492
12	57	---	30554	88-22491
12	58	9390-01-470-1205	30554	88-20187
12	59	4140-01-507-4174	30554	88-22489
12	60	5305-01-380-3395	80204	B18231B10025N
12	61	5310-01-099-9532	30554	88-22331-1
12	62	---	30554	88-22493
12	63	2930-01-370-2868	30554	88-20468
12	64	---	30554	88-20468-1
12	65	---	30554	88-20468-2
12	66	---	30554	88-20468-3
12	67	---	30554	88-22543
12.1	1	---	30554	97-24034
12.1	2	5310-01-531-6724	30554	88-20556-7
12.1	3	---	30554	88-20260-51
12.1	4	5310-00-696-5173	30554	69-561-5
12.1	5	5310-00-809-4058	30554	88-20564-2
12.1	6	---	30554	00-24003-1
12.1	7	5340-01-550-0921	30554	00-24004
12.1	8	---	30554	97-24019
12.1	9	5310-01-531-4937	30554	88-20033-24A
12.1	10	5310-01-099-9532	30554	88-22331-1
12.1	11	5306-01-179-1438	80204	B18231A10025N
12.1	12	---	30554	97-24036
12.1	13	---	30554	00-24003-2
12.1	14	5310-01-532-0321	30554	88-20033-31A
12.1	15	5310-01-466-6687	30554	88-22790-3
12.1	16	---	30554	97-24040

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
12.1	17	5305-01-369-2166	30554	88-20260-30
12.1	18	---	30554	88-20556-38
12.1	19	5310-01-531-4939	30554	88-20033-22A
12.1	20	4820-01-381-5079	30554	88-22751
12.1	21	---	30554	97-24146
12.1	22	---	30554	97-24041
12.1	23	---	30554	97-24032
12.1	24	4730-01-470-1567	30554	88-20561-3
12.1	25	---	30554	97-24035
12.1	26	5305-01-369-2166	30554	88-20260-30
12.1	27	5310-01-531-4939	30554	88-20033-22A
12.1	28	---	30554	88-20556-38
12.1	29	---	30554	97-24033
13	1	2590-00-141-9758	96906	MS35645-1
13	2	5330-00-684-7851	96906	MS35643-1
13	3	4730-01-532-0694	30554	88-22795
13	4	5310-01-267-1685	96906	MS51412-8
13	5	4730-00-802-2560	81343	4-2 140137C
13	6	4730-01-134-9827	30554	88-21884
13	7	5310-01-012-3595	30554	69-561-6
13	8	5306-01-156-7663	30554	88-20260-21
13	9	5340-01-465-7761	30554	88-21892
13	10	5340-01-465-7765	30554	88-21893
13	11	4730-00-908-3195	81343	SAE J1508-06
13	12	---	30554	88-22111
13	13	4730-01-470-1578	30554	88-20561-6
13	14	4730-01-470-1701	30554	88-20561-7
13	15	4720-01-392-0319	30554	88-22068
13	16	2910-01-553-6571	30554	00-24000
13	17	4730-00-187-0840	81343	4-2 070102C
13	18	5310-01-466-6312	30554	88-22790-1
13	19	5310-00-274-8715	80205	MS35338-63
13	20	5306-00-484-5730	30554	88-20260-31
13	21	5310-01-103-6042	96906	MS51412-4
13	22	4730-00-812-1333	30554	69-539-2
13	23	---	30554	00-24002-1
13	24	5975-00-074-2072	96906	MS3367-1-9
13	25	NOT USED		
13	26	NOT USED		
13	27	NOT USED		
13	28	4730-01-343-3192	96906	MS51860-54Z
13	29	4730-01-123-8618	96906	MS51520A5
13	30	4720-01-375-1391	30554	88-22338-1
13	31	4730-00-063-7919	30554	88-20029-4
13	32	---	30554	88-21604-146
13	32	---	30554	97-24604-146
13	32	---	30554	88-21605-146
13	32	---	30554	97-24605-146
13	33	---	30554	88-21604-104
13	33	---	30554	97-24604-104
13	33	---	30554	88-21605-104

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
13	33	---	30554	97-24605-104
13	34	---	30554	88-21604-151
13	34	---	30554	97-24604-151
13	34	---	30554	88-21605-151
13	34	---	30554	97-24605-151
13	35	4730-01-474-2274	30554	88-21883
13	36	4730-00-177-6166	81343	4-4-4 140424C
13	37	4730-00-041-2526	30554	88-21114-2
13	38	---	30554	88-21604-343
13	38	---	30554	97-24604-343
13	38	---	30554	88-21605-343
13	38	---	30554	97-24605-343
13	39	4720-01-394-1931	30554	88-22326-1
13	40	4720-01-366-7172	30554	88-22325
13	41	4730-00-995-1559	96906	MS51500A6
13	42	4730-00-200-0531	30554	88-21173
13	43	4820-01-480-0846	30554	88-20043
13	44	4930-01-475-0388	30554	88-20049
13	45	NOT USED		
13	46	4730-00-620-6904	96906	MS51500A5-4
13	47	4820-01-540-3024	30554	88-22096-2
13	48	4730-00-613-6468	81343	4-4-130238
13	49	4730-00-765-9103	30554	72-2173-1
13	50	5310-01-470-1286	30554	88-22790-2
13	51	5310-00-011-6120	96906	MS35338-64
13	52	5306-00-226-4827	80204	B1821BH031C100N
13	53	5310-00-044-6477	96906	MS51412-25
13	54	---	30554	88-21854
13	55	5305-01-165-1254	96906	MS51492-14
13	56	5310-00-274-8710	80205	MS35338-62
13	57	5310-01-234-9416	96906	MS51412-2
13	58	---	30554	88-22547
13	59	5975-00-074-2072	96906	MS3367-1-9
13	60	5999-01-092-2655	30554	88-20476
13	61	5935-00-483-0259	30554	88-20475
13	62	2910-01-376-2268	30554	88-21121-1
13	63	2910-01-369-5012	30554	88-21162-3
13	64	---	30554	88-21850
13	65	5330-01-366-2836	30554	88-20286
13	66	6680-01-392-8821	30554	88-20492
13	67	5975-00-727-5153	96906	MS3367-4-9
13	68	5975-00-074-2072	96906	MS3367-1-9
13	69	5935-00-315-9563	30554	88-20474
13	70	5935-00-483-0259	30554	88-20475
13	71	---	30554	88-20493
13	72	5999-01-092-2655	30554	88-20476
13	73	5999-01-039-8438	30554	88-20477
13	74	4730-01-376-4256	30554	88-22324
13	75	4730-00-024-3971	81343	SAE J1508
13	76	2910-01-388-6383	30554	88-21043
13	77	---	30554	88-21604-339
13	77	---	30554	97-24604-339

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
13	77	---	30554	88-21605-339
13	77	---	30554	97-24605-339
13	78	---	30554	88-22486
13	79	4730-00-812-7999	96906	MS51504A6
13	80	---	30554	88-22485
13	81	5305-00-225-3843	80204	B1821BH025C100N
13	82	NOT USED		
13	83	NOT USED		
13	84	2910-01-364-9843	30554	88-21101
13	85	4720-00-021-3320	30554	69-668
13	86	5340-01-086-2049	30554	88-20024-5
13	87	4730-01-126-2173	30554	75-0809
13	88	---	30554	69-668-2
13	89	4720-01-215-0816	30554	88-20551-1
13	90	NOT USED		
13	91	NOT USED		
13	92	---	30554	88-22748
13	93	4730-01-407-0649	30554	88-22765
13	94	---	30554	88-21604-396
13	94	---	30554	97-24604-396
13	94	---	30554	88-21605-396
13	94	---	30554	97-24605-396
13	95	4730-01-309-6370	96906	MS51500B4-4Z
13	96	5305-00-068-0508	80204	B1821BH025C075N
13	97	---	30554	88-22643
13	98	---	30554	88-22654
13.1	1	---	30554	88-20556-38
13.1	2	5310-01-531-4939	30554	88-20033-22A
13.1	3	5305-01-369-2166	30554	88-20260-30
13.1	4	---	30554	97-24071
13.1	5	4730-01-470-1626	30554	88-20561-1
13.1	6	4730-01-051-9840	81343	4-4 070202C
13.1	7	5305-01-379-5734	30554	88-20260-35
13.1	8	2910-01-364-9843	30554	88-21101
13.1	9	5975-00-074-2072	30554	88-20018-1
13.1	10	---	30554	88-24002-1
13.1	11	4730-00-187-0840	30554	88-21755-4
13.1	12	2910-01-553-6571	30554	00-24000
13.1	13	4730-00-725-3664	81343	2-2 140239C
13.1	14	---	30554	98-19744-03
13.1	15	---	30554	97-24044
13.1	16	---	30554	97-24071
14	1	5310-01-012-3595	30554	69-561-6
14	2	5306-01-156-7663	30554	88-20260-21
14	3	---	30554	88-22701
14	4	---	30554	88-22704
15	1	6150-01-407-8102	30554	88-22164
15	1A	---	30554	97-24048
15	2	5940-01-425-2020	30554	88-20274-1
15	3	5940-01-531-6448	30554	88-20274-3
15	4	5940-01-369-2270	30554	88-20274-4

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
15	5	5940-00-143-4773	96906	MS25036-105
15	6	5940-00-143-4793	96906	MS25036-110
15	6A	5940-00-114-1314	96906	MS20659-129
15	6B	5940-00-114-1305	96906	MS25036-116
15	7	5940-01-367-9569	30554	88-20274-6
15	8	5940-01-110-6423	30554	88-20274-5
15	9	5940-00-113-8184	96906	MS25036-150
15	10	5940-00-143-4794	96906	MS25036-112
15	11	5940-01-112-9746	30554	88-20275-1
15	12	5940-00-143-4771	81343	MS25036-103
15	13	5940-00-115-0763	96906	MS20659-140
15	13A	5940-00-283-5281	96906	MS25036-109
15	14	5940-00-114-1306	96906	MS25036-117
15	15	5940-00-682-2445	96906	MS25036-158
15	16	5940-00-813-0698	96906	MS25036-101
15	17	5940-00-143-4774	96906	MS25036-153
15	18	5940-00-504-4703	96906	MS25036-104
15	19	5940-01-369-6948	30554	88-22119-12
15	20	5940-00-113-8183	96906	MS25036-113
15	21	5940-00-143-4780	96906	MS25036-108
15	22	6145-00-284-0657	81349	M5086/2-8-9
15	23	6145-00-578-7514	81349	M5086/2-12-9
15	24	6145-00-578-7513	81349	M5086/2-10-9
15	25	5975-00-111-3208	96906	MS3367-5-9
15	26	5975-00-074-2072	96906	MS3367-1-9
15	27	5975-00-944-1499	96906	MS3368-1-9A
15	28	5310-00-836-3520	30554	69-561-1
15	29	5305-01-367-2314	30554	69-662-11
15	30	5935-01-014-4920	30554	88-21947
15	31	5999-01-170-0558	30554	88-21942
15	32	5999-01-366-7952	30554	88-21944
15	33	5935-01-101-7828	30554	88-21982
15	34	5935-01-023-5445	30554	88-21940
15	35	6145-00-851-8505	81349	M5086/2-20-9
15	36	5940-01-470-2470	30554	88-21181-2
15	37	6145-00-578-6605	81349	M5086/2-16-9
15	38	5999-01-366-2621	30554	88-21183-2
15	39	5940-01-478-1154	30554	88-21181-10
15	40	5999-01-039-8438	30554	88-20477
15	41	5935-00-315-9563	30554	88-20474
15	42	5935-01-012-1273	30554	88-20470
15	42A	5935-01-012-1273	30554	88-20470
15	43	---	30554	88-22101-10
15	44	---	30554	88-22101-10-1
15	45	5940-01-531-5519	30554	88-20596-1
15	46	5999-01-366-7952	30554	88-21944
15	47	5940-01-369-6948	30554	88-22119-12
15	48	5940-00-283-5281	96906	MS25036-109
15	49	5940-00-113-8185	96906	MS25036-151
15	50	---	30554	88-22629-043
15	51	---	30554	88-22629-044
15	52	---	30554	88-22629-050

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
15	53	---	30554	88-22101-11
15	54	---	30554	88-22101-11-1
15	55	5940-01-531-5519	30554	88-20596-1
15	56	5999-01-366-7952	30554	88-21944
15	57	5940-00-143-4780	96906	MS25036-108
15	58	5940-00-143-4771	81343	MS25036-103
15	59	5940-01-082-3321	30554	88-20275-3
15	60	---	30554	88-22629-046
15	61	---	30554	88-22629-051
15	62	---	30554	88-22629-052
15	63	---	30554	88-22103-7
15	64	---	30554	88-22103-7-1
15	65	5940-01-531-5519	30554	88-20596-1
15	66	5999-01-366-7952	30554	88-21944
15	67	5999-01-170-0558	30554	88-21942
15	68	5940-00-283-5280	96906	MS25036-106
15	69	---	30554	88-22629-063
15	70	---	30554	88-22629-064
15	71	---	30554	88-22629-074
15	72	---	30554	88-22103-8
15	73	---	30554	88-22103-8-1
15	74	5940-01-531-5519	30554	88-20596-1
15	75	5999-01-366-7952	30554	88-21944
15	76	5999-01-170-0558	30554	88-21942
15	77	5940-01-082-3321	30554	88-20275-3
15	78	5940-01-139-0853	30554	88-20275-4
15	79	---	30554	88-22629-066
15	80	---	30554	88-22629-067
15	81	---	30554	88-22629-075
15	82	---	30554	88-22103-9
15	83	---	30554	88-22103-9-1
15	84	5940-01-531-5519	30554	88-20596-1
15	85	5999-01-366-7952	30554	88-21944
15	86	5999-01-170-0558	30554	88-21942
15	87	5999-01-039-8438	30554	88-20477
15	88	---	30554	88-22629-069
15	89	---	30554	88-22629-070
15	90	---	30554	88-22629-076
15	91	5935-00-852-9611	96906	MS3102R18-11P
15	92	5935-01-020-4094	30554	88-20472
16	1	---	30554	88-21580
16	1	---	30554	88-21582
16	1	---	30554	97-24082
16	2	---	30554	88-22126-1
16	3	5940-01-369-2271	30554	88-22119-3
16	4	5940-00-113-8191	96906	MS25036-127
16	5	---	30554	88-22126-1-1
16	6	---	30554	88-22126-2
16	7	5940-01-369-2271	30554	88-22119-3
16	8	5940-00-113-8191	96906	MS25036-127
16	9	---	30554	88-22126-2-1

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
16	10	---	30554	88-22126-3
16	11	5940-01-369-2271	30554	88-22119-3
16	12	5940-00-113-8191	96906	MS25036-127
16	13	---	30554	88-22126-3-1
16	14	---	30554	88-22126-4
16	15	5940-00-113-8191	96906	MS25036-127
16	16	5940-00-113-9831	96906	MS25036-128
16	17	---	30554	88-22126-4-1
16	18	---	30554	88-22126-5
16	19	5940-01-369-2271	30554	88-22119-3
16	20	5940-00-113-9831	96906	MS25036-128
16	21	---	30554	88-22126-5-1
16	22	---	30554	88-22126-6
16	23	5940-01-369-2271	30554	88-22119-3
16	24	5940-00-113-9831	96906	MS25036-128
16	25	---	30554	88-22126-6-1
16	26	---	30554	88-22126-7
16	27	5940-01-369-2271	30554	88-22119-3
16	28	5940-00-113-9831	96906	MS25036-128
16	29	---	30554	88-22126-7-1
16	30	5310-01-012-3595	30554	69-561-6
16	31	5305-00-191-6226	30554	69-662-64
16	32	5310-01-234-9416	96906	MS51412-2
16	33	5950-01-368-2915	30554	88-21131
16	34	5950-01-382-3371	30554	88-21015
16	35	5950-01-368-3006	30554	01-21504-2
16	35	5950-01-370-3328	30554	01-21504-1
16	36	6110-01-367-8921	30554	88-21066
16	37	5945-01-365-9953	30554	88-21082
16	38	5310-00-052-3632	30554	69-561-3
16	39	5305-00-036-6902	30554	69-662-36
16	40	5940-01-470-3031	30554	88-21182-10
16	41	5940-01-470-2768	30554	88-21182-2
16	42	5340-00-724-7038	96906	MS21333-76
16	43	5305-01-187-5878	30554	69-662-65
16	44	5306-01-156-7663	30554	88-20260-21
16	45	---	30554	88-21932
16	46	---	30554	88-22060
16	47	5325-00-351-4543	30554	88-22122
16	48	5325-00-290-1960	96906	MS35489-27
16	49	5340-01-222-4225	30554	72-2098-2
16	50	5310-01-103-6042	96906	MS51412-4
16	51	5940-01-384-0384	30554	88-22437
16	52	5310-01-466-7247	30554	88-22786
16	53	5940-01-369-2877	30554	88-22436
16	54	5310-01-366-4412	30554	88-21930-1
16	55	5310-01-289-7716	30554	72-2062-1
16	56	5940-01-003-8579	30554	72-2236
16	57	5940-00-606-4970	30554	72-2213
16	58	---	30554	88-21669
16	59	5305-01-334-8683	96906	MS51493-2
16	60	5310-00-836-3520	30554	69-561-1

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
16	61	5305-00-224-1092	30554	69-662-5
16	62	6110-01-372-2597	30554	88-22509
16	63	5935-01-175-8419	96906	MS25043-18DA
16	64	---	30554	88-22039
16	65	5910-01-384-1745	30554	88-22758
16	66	5940-00-113-3140	96906	MS20659-125
16	67	5910-01-343-8827	30554	88-22757-2
16	68	5310-00-929-1807	96906	MS51922-2
16	69	5310-01-103-6042	96906	MS51412-4
16	70	6150-01-407-8102	30554	88-22164
16	70	---	30554	97-24048
17	1	4020-01-470-6597	30554	88-22469
17	2	5940-00-115-2677	96906	MS20659-144
17	3	---	30554	88-22469-2
17	4	5120-01-373-8976	30554	88-21146
17	5	5310-01-012-3595	30554	69-561-6
17	6	5306-01-156-7663	30554	88-20260-21
17	7	---	30554	88-22136
17	8	5310-01-183-5529	30554	88-21930-2
17	9	5310-00-465-2719	30554	88-20033-40B
17	10	---	30554	88-20305-1
17	11	5940-01-082-3321	30554	88-20275-3
17	12	5940-01-369-6948	30554	88-22119-12
17	13	---	30554	88-20305-1-1
17	14	---	30554	88-20305-2
17	15	5940-01-082-3321	30554	88-20275-3
17	16	5940-01-369-6948	30554	88-22119-12
17	17	---	30554	88-20305-2-1
17	18	---	30554	88-20305-3
17	19	5940-01-082-3321	30554	88-20275-3
17	20	5940-01-369-6948	30554	88-22119-12
17	21	---	30554	88-20305-3-1
17	22	5905-01-463-0058	30554	88-20305-5
17	23	5940-01-082-3321	30554	88-20275-3
17	24	5940-01-369-6948	30554	88-22119-12
17	25	---	30554	88-20305-5-1
17	26	5310-01-466-7247	30554	88-22786
17	27	5310-01-466-7321	30554	88-22792-2
17	28	5305-00-543-4372	80204	B1821BH038C075N
17	29	5310-01-366-4412	30554	88-21930-1
17	30	5310-00-205-9951	30554	88-20033-26B
17	31	---	30554	88-22459
17	32	5305-00-068-0509	80204	B1821BH025C125N
17	33	5310-00-274-8715	80205	MS35338-63
17	34	5310-01-103-6042	96906	MS51412-4
17	35	---	30554	88-21767
17	36	5340-00-297-0312	30554	88-21674-3
17	37	---	30554	88-21933
17	38	---	30554	88-21666
17	39	5310-00-189-8467	30554	88-22336-1
17	40	5940-00-958-1214	30554	69-692-1

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
17	41	5940-01-003-8579	30554	72-2236
17	42	---	30554	88-22163-1
17	43	---	30554	88-22146
17	44	5305-01-365-6314	30554	88-20260-25
17	45	5905-01-063-9644	30554	88-21179
17	46	---	30554	88-21775
17	47	5915-01-396-9253	30554	88-22761
17	47	5915-01-488-5004	30554	88-22805
17	48	5915-01-394-0942	30554	88-22762
17	48	5915-01-466-8148	30554	88-22807
18	1	5310-01-012-3595	30554	69-561-6
18	2	5306-01-156-7663	30554	88-20260-21
18	3	5945-00-855-7478	30554	88-22202
18	4	NOT USED		
18	5	5305-01-380-3395	80204	B18231B10025N
18	6	5310-01-368-3048	30554	88-22331-2
18	7	---	30554	88-22319
18	8	5930-01-107-6474	30554	88-22706
18	9	4730-01-366-9017	30554	88-22307
18	10	5930-01-378-6921	30554	88-21126
18	11	4820-01-367-1836	30554	88-21633
18	12	5975-00-074-2072	96906	MS3367-1-9
18	13	---	30554	88-22481
18	14	4730-01-236-1186	30554	88-21887
18	15	5905-01-392-8825	30554	88-22322
18	16	---	30554	88-22550
18	17	5940-01-112-9746	30554	88-20275-1
18	18	5940-01-126-3973	30554	88-20275-2
18	19	6695-01-367-9723	30554	88-21061
18	20	5310-01-500-7620	30554	88-22201
18	21	5305-01-380-3395	80204	B18231B10025N
18	22	5310-01-368-3048	30554	88-22331-2
18	23	5340-00-053-8994	80205	MS21333-126
18	24	5310-00-761-6882	96906	MS51967-2
18	25	5310-00-274-8715	80205	MS35338-63
18	26	5306-01-366-7075	30554	88-20260-33
18	27	5310-01-103-6042	96906	MS51412-4
18	28	---	30554	88-22320
18	29	5930-01-365-9614	30554	88-21081
18	30	5320-00-932-1972	97403	13214E3789-2
18	31	---	30554	88-21776
18	32	5930-01-377-9113	30554	88-22317
18	33	5305-01-423-8236	80204	B18231B10016N
18	34	5310-01-368-3048	30554	88-22331-2
18	35	5340-00-057-3026	80205	MS21333-117
18	36	4730-00-287-3281	81343	2-130109E
18	37	---	80204	B1831BH060014
18	38	5310-01-195-6611	30554	88-22331-3
18	39	5340-01-367-2287	30554	88-22623
18	40	5340-01-476-5376	30554	88-22784
18	41	5310-01-220-6513	80204	B18241A060
18	42	1440-01-560-1702	30554	88-22545

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
18	43	5975-00-074-2072	96906	MS3367-1-9
18	44	5999-01-092-2655	30554	88-20476
18	45	5935-00-482-7721	30554	88-20471
18	46	2910-01-371-2689	30554	88-22428
18	47	5330-01-366-6589	30554	88-22618
18	48	---	80204	B18231B6020N
18	49	---	30554	88-22617
18	50	5330-01-392-8826	30554	88-22416
18	51	5310-01-366-3540	80204	B18241B050
18	52	5310-01-368-3049	30554	88-22331-4
18	53	---	80204	B18231B5016N
18	54	5340-01-367-2328	30554	88-22619
18	55	5310-00-208-9255	30554	95-8125-4
18	56	---	30554	88-22621
18	57	5315-01-366-6685	30554	88-22620
18	58	5360-01-368-4663	30554	88-22624
18	59	5310-01-257-7590	96906	MS51412-7
18	60	5310-00-988-2652	80205	MS35650-103
18	61	5930-01-365-9614	30554	88-21081
18	62	---	30554	97-24045
18	63	---	30554	97-24061
18	64	---	30554	88-22322
18	65	---	30554	97-24118
18	66	5310-01-531-4939	30554	88-20033-22A
18	67	5310-01-195-6611	30554	88-22331-3
18	68	5305-01-392-8847	80204	B1831BH060016
18	69	5310-01-466-7321	30554	88-22792-2
18	70	5306-01-179-1438	80204	B18231A10025N
18	71	5310-01-099-9532	30554	88-22331-1
18	72	5310-01-531-4937	30554	88-20033-24A
18	73	---	30554	97-24017
18	74	NOT USED		
18	75	---	30554	88-20554-1
18	76	5306-01-174-8738	80204	B18231A10020N
18	77	---	30554	97-24114
18	78	5975-00-074-2072	96906	MS3367-1-9
18	79	5999-01-092-2655	30554	88-20476
18	80	5935-00-482-7721	30554	88-20471
18	81	---	30554	97-24018
19	1	---	81343	12 130109G
19	2	4730-00-908-3194	96906	MS35842-11
19	3	---	30554	88-21604-110
19	3	---	30554	97-24604-110
19	3	---	30554	88-21605-110
19	3	---	30554	97-24605-110
19	4	---	30554	88-21755-3
19	5	---	30554	88-21891
19	6	4730-01-470-1982	30554	72-5304
19	7	---	30554	97-24011
19	8	4730-00-900-8663	81343	12-12 140339C
19.1	1	4730-01-470-2409	30554	88-20561-2

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
19.1	2	4730-01-417-5855	81343	8-4 430160C
19.1	3	4730-01-470-1626	30554	88-20561-1
19.1	4	4720-00-670-6037	30554	88-20579-6
19.1	5	---	30554	97-24031
19.1	6	---	30554	97-24113
19.1	7	---	30554	88-20879-7
19.1	8	---	30554	97-24002
19.1	9	---	30554	97-24025
19.1	10	5306-00-226-4827	80204	B1821BH031C100N
19.1	11	---	30554	97-24024
19.1	12	5306-01-179-1438	80204	B18231A10025N
19.1	13	5310-01-099-9532	30554	88-22331-1
19.1	14	5310-01-531-4937	30554	88-20033-24A
19.1	15	---	30554	97-24026
19.1	16	5305-00-036-6972	30554	69-662-20
19.1	17	4730-01-470-1567	30554	88-20561-3
19.1	18	5930-01-378-6921	30554	88-21126
19.1	19	5930-01-107-6474	30554	88-22706
19.1	20	---	30554	97-24016
19.1	21	4820-01-367-1836	30554	88-21633
19.1	22	5306-01-174-8738	80204	B18231A10020N
19.1	23	5310-01-368-3048	30554	88-22331-2
19.1	24	5310-01-532-0321	30554	88-20033-31A
19.1	25	---	30554	97-24015
19.1	26	5310-00-063-7360	30554	69-561-2
19.1	27	5310-01-234-9415	30554	88-20564-3
19.1	28	5310-01-477-9621	30554	88-20556-6
19.1	29	5310-01-470-1286	30554	88-22790-2
20	1	5305-00-983-7449	96906	MS16998-75
20	2	5310-00-011-5093	80205	MS35338-65
20	3	5365-01-384-9169	30554	88-22339
20	4	5305-00-068-0511	80204	B1821BH038C125N
20	5	5310-01-215-7311	96906	MS51943-13
20	6	5310-01-242-2679	96906	MS51412-11
20	7	5310-01-365-8139	30554	88-20247-3
20	8	5305-00-724-7265	80204	B1821BH063C475N
20	9	5310-01-365-4386	30554	88-22508
20	10	5310-00-764-6609	96906	MS51971-7
20	11	5305-01-366-3501	30554	88-22530
20	12	5340-01-366-3360	30554	88-21069-12
20	13	---	30554	88-22524
20	14	---	30554	88-22525
20	15	5305-00-068-0510	80204	B1821BH038C100N
20	16	NOT USED		
20	17	---	30554	97-24116-5
20	18	5310-01-368-3048	30554	88-22331-2
20	19	---	30554	97-24122
20	20	---	30554	97-24116-4
21	1	6115-01-383-3124	30554	88-21005
21	2	5305-00-068-0500	96906	MS90725-3
21	3	5310-01-215-7311	96906	MS51943-13
21	4	---	36156	720346-0C

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
21	5	---	36156	720345-03
21	6	---	36156	720344-03
21	7	5940-00-113-9820	96906	MS20659-128
21	8	5940-00-113-0954	96906	MS20659-165
21	9	5305-00-068-0502	80205	MS90725-6
21	10	5310-00-274-8715	80205	MS35338-63
21	11	---	36156	752818-0A
21	12	---	36156	834822-01
21	13	5340-01-382-2589	36156	846833-01
21	14	5306-00-225-8499	80205	MS90725-34
21	15	5310-00-011-6120	96906	MS35338-64
21	16	---	36156	703320-02
21	17	5305-00-292-4562	88044	AN565C416-12
21	18	---	36156	789295-0A
21	19	5330-01-374-4468	36156	865876-01
21	20	---	36156	777070-0A
21	21	3110-01-304-8142	52676	6308-2RSJEM
21	22	5365-00-803-7304	96906	MS16624-1156
21	23	5305-01-324-4896	36156	801016-06
21	24	5310-00-576-5752	80205	MS35333-39
21	25	5961-01-248-1712	36156	777079-0A
21	26	---	36156	718810
21	27	5340-01-302-2960	96906	MS25281-4
21	28	5305-00-984-6189	80205	MS35206-241
21	29	5305-00-993-1849	80205	MS35207-259
21	30	---	30554	88-21795-8
21	31	5961-00-478-7687	80131	1N3663
21	32	5961-01-013-0682	80121	1N3663R
21	33	---	36156	778715-0A
21	34	---	36156	707806-0A
21	35	---	36156	791149-0A
21	36	5315-01-236-0612	96906	MS20066-352
21	37	5940-00-114-1300	96906	MS20659-105
21	38	---	36156	707329-01
21	39	5315-00-227-6415	96906	MS20066-354
21	40	2930-01-329-4857	36156	716327-0A
21	41	5310-00-984-3806	96906	MS51922-9
21	42	5305-00-225-8507	80205	MS90725-43
21	43	---	30554	88-21783
21	44	5305-00-269-2801	80205	MS90726-58
21	45	5310-00-087-7493	96906	MS27183-13
21	46	5305-00-269-3239	80204	B1821BH038F138N
21	47	5365-01-384-9169	30554	88-22339
21	48	---	36156	702806-01
21	49	---	36156	783621-0A
21	50	5306-00-050-0347	96906	MS51937-5
21	51	5310-00-768-0318	96906	MS51967-14
21	52	---	36156	A-9696
21	53	5305-00-253-5615	80205	MS21318-21
21	54	---	30554	88-20064-5
21	55	---	36156	706336-03

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
22	1	6115-01-434-1432	30554	88-21006
22	2	5310-00-761-6882	96906	MS51967-2
22	3	5310-00-274-8715	80205	MS35338-63
22	4	5305-00-988-1728	80205	MS35206-287
22	5	---	36156	720982-0A
22	6	5305-00-068-0500	96906	MS90725-3
22	7	---	36156	718514-01
22	8	---	36156	718516-01
22	9	---	36156	718515-01
22	10	---	36156	718517-01
22	11	---	30554	88-21804
22	12	5940-00-113-9820	96906	MS20659-128
22	13	5940-00-113-0954	96906	MS20659-165
22	14	5305-00-068-0502	80205	MS90725-6
22	15	---	36156	752818-0A
22	16	---	36156	834822-01
22	17	---	36156	718337-01
22	18	5305-01-283-8664	80205	MS90725-110
22	19	5310-00-011-6121	96906	MS35338-67
22	20	---	36156	703513-01
22	21	5305-01-080-5721	88044	AN565C416H6
22	22	6115-01-385-3104	36156	789293-0A
22	23	5330-01-369-7318	36156	865873-01
22	24	---	36156	777068-0A
22	25	3110-00-155-6298	21335	312KDD
22	26	5305-00-068-0501	80205	MS90725-5
22	27	5310-00-274-8715	80205	MS35338-63
22	28	2920-01-298-6321	36156	777056-0A
22	29	5310-00-761-6882	96906	MS51967-2
22	30	5310-00-550-1130	80205	MS35333-40
22	31	5305-00-068-0500	96906	MS90725-3
22	32	5940-00-230-0515	96906	MS25036-154
22	33	5310-01-494-2731	80205	AN315-4
22	34	5961-01-067-9493	81349	JANTX1N1190R
22	35	5961-00-154-7046	81349	JANTX1N1190
22	36	5305-00-984-6196	80205	MS35206-248
22	37	5310-00-934-9757	80205	MS35649-282
22	38	5310-00-559-0070	80205	MS35333-38
22	39	5340-01-302-2960	96906	MS25281-4
22	40	---	30554	88-21649-19
22	41	---	30554	88-21649-17
22	42	5305-00-988-1727	80205	MS35206-283
22	43	---	36156	B-718930-01
22	44	---	36156	B-718817-01
22	45	6130-01-533-2167	36156	707807-02
22	46	6115-01-533-2172	36156	791150-0A
22	47	5365-00-804-7654	96906	MS16624-1300
22	48	5315-00-847-3531	96906	MS20066-356
22	49	5940-00-143-4777	96906	MS25036-157
22	50	---	36156	707329-01
22	51	5315-00-227-6415	96906	MS20066-354
22	52	2930-01-329-4857	36156	716327-0A

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
22	53	5310-00-984-3806	96906	MS51922-9
22	54	5305-00-225-8507	80205	MS90725-43
22	55	---	30554	88-21783
22	56	5305-00-269-2801	80205	MS90726-58
22	57	5310-00-087-7493	96906	MS27183-13
22	58	5305-00-269-3239	80204	B1821BH038F138N
22	59	5365-01-384-9169	30554	88-22339
22	60	---	36156	702806-01
22	61	5305-00-282-3249	88044	AN565C816H16
22	62	---	36156	783622-0A
22	63	5306-00-017-6143	96906	MS51937-7
22	64	5310-00-763-8920	96906	MS51967-20
22	65	---	36156	A-9696
22	66	5305-00-253-5615	80205	MS21318-21
22	67	---	30554	88-20064-6
22	68	---	30554	88-21798
23	1	---	96906	MS51493-5
23	2	5310-01-257-7590	96906	MS51412-7
23	3	5305-00-725-2317	80204	B1821BH038C150N
23	4	---	30554	88-22321
23	5	5310-01-466-6312	30554	88-22790-1
23	6	5310-00-274-8715	80205	MS35338-63
23	7	5305-01-056-1501	30554	88-20260-32
23	8	5310-01-103-6042	96906	MS51412-4
23	9	---	80204	B18231B8025N
23	10	5310-01-099-9532	30554	88-22331-1
23	11	---	30554	88-22425
23	12	2815-01-350-2207	30554	88-22315
23	13	5310-01-231-7459	96906	MS51943-9
23	14	5310-01-266-4641	96906	MS51412-9
23	15	5310-01-365-3190	30554	88-20247-2
23	16	5305-00-071-2075	80204	B1821BH050C300N
23	17	5305-00-071-2066	80204	B1821BH050C100N
23	18	5310-00-011-6121	96906	MS35338-67
23	19	---	30554	88-22135
23	20	---	30554	88-22174
23	21	5305-00-068-0510	80204	B1821BH038C100N
23	22	5342-01-467-4366	30554	88-21071-3
23.1	1	5310-01-466-6312	30554	88-22790-1
23.1	2	---	30554	88-20556-38
23.1	3	---	30554	88-20033-21A
23.1	4	5305-00-071-2075	80204	B1821BH050C300N
23.1	5	---	30554	97-24010
23.1	6	---	30554	97-24023
23.1	7	5310-01-531-4937	30554	88-20033-24A
23.1	8	5310-01-099-9532	30554	88-22331-1
23.1	9	---	81343	B18231A03014
23.1	10	5306-01-179-1438	80204	B18231A10025N
23.1	11	5310-01-368-3048	30554	88-22331-2
23.1	12	5310-01-532-0321	30554	88-20033-31A
23.1	13	---	30554	97-24038

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
23.1	14	5305-01-379-5734	30554	88-20260-35
23.1	15	---	30554	97-24013
23.1	16	5306-01-174-8738	80204	B18231A10020N
23.1	17	5310-01-368-3048	30554	88-22331-2
23.1	18	5310-01-532-0321	30554	88-20033-31A
23.1	19	---	30554	97-24014
23.1	20	5342-01-467-4366	30554	88-21071-3
23.1	21	5310-01-365-3190	30554	88-20247-2
23.1	22	5310-01-266-4641	30554	88-20033-41A
23.1	23	5310-01-470-2776	30554	88-20568-5
23.1	24	5310-01-470-6529	30554	88-20568-4
23.1	25	---	30554	88-20033-34A
23.1	26	5305-00-068-0510	80204	B1821BH038C100N
23.1	27	---	30554	97-24012
23.1	28	5305-01-369-2166	30554	88-20260-30
23.1	29	---	30554	97-24039
23.1	30	---	30554	97-24037
23.1	31	---	30554	97-24116-5
23.1	31	---	30554	97-24116-6
24	1	5310-01-466-6687	30554	88-22790-3
24	2	5310-00-011-5093	80205	MS35338-65
24	3	5310-01-257-7590	96906	MS51412-7
24	4	5305-00-068-0510	80204	B1821BH038C100N
24	5	---	30554	88-21731
24	6	---	30554	88-22007
25	1	2815-01-482-8924	30554	98-2014
25	2	6150-01-496-7717	30554	98-2018-1
25	3	2990-01-483-4051	30554	98-2000
25	4	2910-01-483-4069	30554	98-2013
25	5	---	30554	98-2053-3
25	6	6115-01-477-0566	30554	98-2015
26	1	5306-01-156-7663	30554	88-20260-21
26	2	5310-01-531-6085	30554	88-20033-10A
26	3	5310-01-532-0291	30554	88-20556-4
26	4	5310-00-533-2743	30554	13218E0320-49
26	5	2915-01-482-8924	30554	98-2014
27	1	---	30554	98-2041
27	2	5320-00-932-1972	97403	13214E3789-2
27	3	---	30554	98-2001
27	4	---	30554	98-2049-4
27	5	---	30554	98-2049-3
27	6	---	30554	98-2050
27	7	5930-01-366-0048	30554	88-22141
27	8	---	30554	98-2043
27	9	---	30554	98-2021
27	10	---	30554	98-2003
28	1	---	81343	J1508-10 TYPE D
28	2	---	81343	J30R7-TYPE 1-5/32ID
28	3	---	1C645	DIN73378-6x2-PA12-HL-sw
28	4	2910-01-483-4069	30554	98-2013
28	5	---	81343	J1508-13 TYPE D
28	6	---	30554	98-2025-3

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
28	7	---	1C645	DIN73378-4x1.25-PA12-HL-nf
28	8	4720-01-293-4415	81343	J30R7-TYPE 1-3/16ID
28	9	---	30554	88-20037WDG21
28	10	4730-01-470-6199	81343	4-4-4-140424B
28	11	5306-01-156-7663	30554	88-20260-21
28	12	5310-01-531-6085	30554	88-20033-10A
28	13	5310-01-532-0291	30554	88-20556-4
28	14	5310-00-533-2743	97403	13218E0320-49
29	1	2920-12-187-7756	D2212	0102124405
29	2	5905-14-485-6282	F1425	251667010001
29	3	4320-12-326-9400	D8435	251671250100
29	4	4730-12-167-2104	D8435	102064032050
29	5	2990-01-483-4051	30554	98-2000
30	1	5306-01-156-7663	30554	88-20260-21
30	2	---	30554	98-2002
30	3	5310-01-531-6085	30554	88-20033-10A
30	4	5310-01-532-0291	30554	88-20556-4
30	5	5310-00-533-2743	30554	13218E0320-49
31	1	4730-00-908-3193	58536	J1670-24
31	2	---	30554	98-2009
31	3	---	81343	J1670-10
31	4	4720-01-484-6062	30554	98-2059-7
31	5	2990-01-483-4051	30554	98-2000
31	6	---	30554	98-2022
31	7	4720-01-484-6004	30554	98-2059-4
32	1	5340-01-470-5184	30554	96-23615
32	2	---	30554	98-2019-2
32	3	---	30554	98-2008-4
32	4	4730-00-235-4066	30554	98-2024-5
32	5	5310-00-533-2743	97403	13218E0320-49
32	6	5310-01-532-0291	30554	88-20556-4
32	7	5310-01-531-6085	30554	88-20033-10A
32	8	5340-00-550-5943	30554	98-2017-3
33	1	5999-01-170-0558	30554	88-21942
33	2	5920-01-414-6436	58536	AA55569/02-009
33	3	6150-01-496-7717	30554	98-2018-1
34	1	---	30554	98-2049-4
34	2	6145-00-851-8505	30554	88-20540-2
34	3	5940-00-411-5913	30554	95-8105-2
34	4	5999-01-366-5119	30554	88-21941
34	5	---	30554	98-2049-3
34	6	6145-00-851-8505	30554	88-20540-2
34	7	5940-00-813-0698	97403	13226E0107-3
34	8	---	30554	98-2050
34	9	6145-00-851-8505	30554	88-20540-2
34	10	5940-00-283-5280	97403	13226E0107-11
BULK	1	6145-00-567-7412	16428	8407
BULK	2	6145-01-213-5495	81349	M27500-16TE2T14
BULK	3	6145-01-104-5076	81349	M27500-16TE1T14
BULK	4	6145-01-129-9955	81349	M27500-20TE2T14
BULK	5	6145-01-128-2979	81349	M27500-20TE3T14

SECTION IV. CROSS-REFERENCE INDEXES (CONTINUED)

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
BULK	6	4010-01-365-6107	80244	RR-C-271 TY2CL6
BULK	7	NOT USED		
BULK	8	4010-00-958-0633	81348	RR-C-271 TY2 CL7-16
BULK	9	5325-00-074-3301	30554	88-20543-2
BULK	10	5340-01-379-0688	03007	Z60960
BULK	11	5340-01-367-6703	03007	AA07060408
BULK	12	5340-01-367-6704	03007	AA06060406
BULK	13	4720-01-393-5581	96906	MS521302A101360
BULK	14		81349	100R1A-16
BULK	15		81349	100R1AT-16
BULK	16	4720-01-470-3929	30554	88-20579-3
BULK	17	NOT USED		
BULK	18	5970-00-822-2775	81349	M23053/5-110-9
BULK	19	5970-00-978-7677	81349	M23053/5-110-2
BULK	20	5970-00-954-1622	81349	M23053/5-105-0
BULK	21	5970-00-812-2969	81349	M23053/5-104-0
BULK	22	5970-00-082-3948	81349	M23053/5-108-9
BULK	23	5970-00-082-3942	81349	M23053/5-105-9
BULK	24	5970-01-367-0730	81349	M3190/03-17-0
BULK	25	9390-01-408-1672	57137	62-B7-1/16
BULK	26	4020-00-523-9641	72205	1-4INDIA
BULK	27	9320-01-394-8045	81349	MIL-R-6130TYII/GRA
BULK	28	5330-01-369-8947	1X968	ZX-4134
BULK	29	5330-01-367-6329	30554	88-22705
BULK	30	5330-01-531-6822	30554	88-22708
BULK	31	NOT USED		
BULK	32	5330-01-384-3057	30554	88-22712
BULK	33	5330-01-384-1755	99739	6130TZS-S1SXPSA1S.75X1.00
BULK	34	5640-01-386-9618	28818	FF40JM02
BULK	35	6145-01-422-8602	30554	88-20444-2
BULK	36	6145-01-422-4370	81343	SAE-J1127
BULK	37	6145-00-851-8505	81349	M5086/2-20-9
BULK	38	6145-00-578-6605	81349	M5086/2-16-9
BULK	39	6145-00-284-0657	81349	M5086/2-8-9
BULK	40	6145-00-578-7513	81349	M5086/2-10-9
BULK	41	6145-00-578-6596	81349	M5086/2-2-9
BULK	42	4720-01-470-6230	30554	88-20579-4
BULK	43	4720-00-670-6037	98441	88-20579-6
BULK	44	4720-00-235-4131	98441	88-20579-7

RECOMMENDED CHANGES TO PUBLICATIONS AND BLANK FORMS For use of this form, see AR 25-30; the proponent agency is OAASA						Use Part II (reverse) for Repair Parts and Special Tool Lists (RPSTL) and Supply Catalogs/Supply Manuals (SC/SM).	DATE 30 August 2002
TO: (Forward to proponent of publication or form) (Include ZIP Code) Commander, US Army CECOM LCMC ATTN: AMSEL-LC-LEO-E-ED Fort Monmouth, NJ 07703-5006						FROM: (Activity and location) (Include ZIP Code) Jane Q. Doe, SFC 1234 Any Street Anytown, AL 34565	
PART I - ALL PUBLICATIONS (EXCEPT RPSTL AND SC/SM) AND BLANK FORMS							
PUBLICATION/FORM NUMBER TM 11-1234-567-14						DATE 16 Sep 2001	TITLE Operator, Field and Sustainment Support Maintenance Manual for Radio, AN/ABC-123
ITEM	PAGE	PARA-GRAPH	LINE	FIGURE NO.	TABLE	RECOMMENDED CHANGES AND REASON	
1	WP0005 PG 3		2			Test or Corrective Action column should identify a different WP number.	
EXAMPLE							
TYPED NAME, GRADE OR TITLE Jane Q. Doe, SFC				TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION 123-4567		SIGNATURE	

TO: <i>(Forward to proponent of publication or form) (Include ZIP Code)</i>				FROM: <i>(Activity and location) (Include ZIP Code)</i>			DATE	
PART II- REPAIR PARTS AND SPECIAL TOOL LISTS AND SUPPLY CATALOGS/SUPPLY MANUALS								
PUBLICATION/FORM NUMBER				DATE		TITLE		
PAGE NO.	COLM NO.	LINE NO.	NATIONAL STOCK NUMBER	REFERENCE NO.	FIGURE NO.	ITEM NO.	TOTAL NO. OF MAJOR ITEMS SUPPORTED	RECOMMENDED ACTION
EXAMPLE								
PART III - REMARKS <i>(Any general remarks, recommendations, or suggestions for improvement of publications and blank form. Additional sheets may be used if more space is needed.)</i>								
TYPED NAME, GRADE OR TITLE			TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION			SIGNATURE		

RECOMMENDED CHANGES TO PUBLICATIONS AND BLANK FORMS For use of this form, see AR 25-30; the proponent agency is OAASA						Use Part II (reverse) for Repair Parts and Special Tool Lists (RPSTL) and Supply Catalogs/Supply Manuals (SC/SM).	DATE
TO: (Forward to proponent of publication or form) (Include ZIP Code)						FROM: (Activity and location) (Include ZIP Code)	
PART I - ALL PUBLICATIONS (EXCEPT RPSTL AND SC/SM) AND BLANK FORMS							
PUBLICATION/FORM NUMBER						DATE	TITLE
ITEM	PAGE	PARA-GRAPH	LINE	FIGURE NO.	TABLE	RECOMMENDED CHANGES AND REASON	
TYPED NAME, GRADE OR TITLE				TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION		SIGNATURE	

TO: <i>(Forward to proponent of publication or form) (Include ZIP Code)</i>				FROM: <i>(Activity and location) (Include ZIP Code)</i>			DATE	
PART II- REPAIR PARTS AND SPECIAL TOOL LISTS AND SUPPLY CATALOGS/SUPPLY MANUALS								
PUBLICATION/FORM NUMBER				DATE		TITLE		
PAGE NO.	COLM NO.	LINE NO.	NATIONAL STOCK NUMBER	REFERENCE NO.	FIGURE NO.	ITEM NO.	TOTAL NO. OF MAJOR ITEMS SUPPORTED	RECOMMENDED ACTION
PART III - REMARKS <i>(Any general remarks or recommendations, or suggestions for improvement of publications and blank forms. Additional blank sheets may be used if more space is needed.)</i>								
TYPED NAME, GRADE OR TITLE			TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION			SIGNATURE		

RECOMMENDED CHANGES TO PUBLICATIONS AND BLANK FORMS For use of this form, see AR 25-30; the proponent agency is OAASA						Use Part II (reverse) for Repair Parts and Special Tool Lists (RPSTL) and Supply Catalogs/Supply Manuals (SC/SM).	DATE
TO: (Forward to proponent of publication or form) (Include ZIP Code)						FROM: (Activity and location) (Include ZIP Code)	
PART I - ALL PUBLICATIONS (EXCEPT RPSTL AND SC/SM) AND BLANK FORMS							
PUBLICATION/FORM NUMBER						DATE	TITLE
ITEM	PAGE	PARA-GRAPH	LINE	FIGURE NO.	TABLE	RECOMMENDED CHANGES AND REASON	
TYPED NAME, GRADE OR TITLE				TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION		SIGNATURE	

TO: <i>(Forward to proponent of publication or form) (Include ZIP Code)</i>				FROM: <i>(Activity and location) (Include ZIP Code)</i>			DATE	
PART II- REPAIR PARTS AND SPECIAL TOOL LISTS AND SUPPLY CATALOGS/SUPPLY MANUALS								
PUBLICATION/FORM NUMBER				DATE		TITLE		
PAGE NO.	COLM NO.	LINE NO.	NATIONAL STOCK NUMBER	REFERENCE NO.	FIGURE NO.	ITEM NO.	TOTAL NO. OF MAJOR ITEMS SUPPORTED	RECOMMENDED ACTION
PART III - REMARKS <i>(Any general remarks or recommendations, or suggestions for improvement of publications and blank forms. Additional blank sheets may be used if more space is needed.)</i>								
TYPED NAME, GRADE OR TITLE			TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION			SIGNATURE		

RECOMMENDED CHANGES TO PUBLICATIONS AND BLANK FORMS For use of this form, see AR 25-30; the proponent agency is OAASA						Use Part II (reverse) for Repair Parts and Special Tool Lists (RPSTL) and Supply Catalogs/Supply Manuals (SC/SM).	DATE
TO: (Forward to proponent of publication or form) (Include ZIP Code)						FROM: (Activity and location) (Include ZIP Code)	
PART I - ALL PUBLICATIONS (EXCEPT RPSTL AND SC/SM) AND BLANK FORMS							
PUBLICATION/FORM NUMBER						DATE	TITLE
ITEM	PAGE	PARA-GRAPH	LINE	FIGURE NO.	TABLE	RECOMMENDED CHANGES AND REASON	
TYPED NAME, GRADE OR TITLE				TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION		SIGNATURE	

TO: <i>(Forward to proponent of publication or form) (Include ZIP Code)</i>				FROM: <i>(Activity and location) (Include ZIP Code)</i>			DATE	
PART II- REPAIR PARTS AND SPECIAL TOOL LISTS AND SUPPLY CATALOGS/SUPPLY MANUALS								
PUBLICATION/FORM NUMBER				DATE		TITLE		
PAGE NO.	COLM NO.	LINE NO.	NATIONAL STOCK NUMBER	REFERENCE NO.	FIGURE NO.	ITEM NO.	TOTAL NO. OF MAJOR ITEMS SUPPORTED	RECOMMENDED ACTION
PART III - REMARKS <i>(Any general remarks or recommendations, or suggestions for improvement of publications and blank forms. Additional blank sheets may be used if more space is needed.)</i>								
TYPED NAME, GRADE OR TITLE			TELEPHONE EXCHANGE/AUTOVON, PLUS EXTENSION			SIGNATURE		

By Order of the Secretary of the Army:

GEORGE W. CASEY, JR.
General, United States Army
Chief of Staff

Official:



JOYCE E. MORROW
Administrative Assistant to the
Secretary of the Army
0830403

By Order of the Secretary of the Air Force:

NORTON A. SCHWARTZ
General, USAF
Chief of Staff, USAF

Official:

BRUCE CARLSON
General, USAF
Commander, AFMC

DISTRIBUTION: To be distributed in accordance with the initial distribution number 255561 requirements for TM 9-6115-643-24P.

The Metric System and Equivalents

Linear Measure

1 centimeter = 10 millimeters = .39 inch
 1 decimeter = 10 centimeters = 3.94 inches
 1 meter = 10 decimeters = 39.37 inches
 1 dekameter = 10 meters = 32.8 feet
 1 hectometer = 10 dekameters = 328.08 feet
 1 kilometer = 10 hectometers = 3,280.8 feet

Liquid Measure

1 centiliter = 10 milliliters = .34 fl. ounce
 1 deciliter = 10 centiliters = 3.38 fl. ounces
 1 liter = 10 deciliters = 33.81 fl. ounces
 1 dekaliter = 10 liters = 2.64 gallons
 1 hectoliter = 10 dekaliters = 26.42 gallons
 1 kiloliter = 10 hectoliters = 264.28 gallons

Weights

1 centigram = 10 milligrams = .15 grain
 1 decigram = 10 centigrams = 1.54 grains
 1 gram = 10 decigrams = .035 ounce
 1 dekagram = 10 grams = .35 ounce
 1 hectogram = 10 dekagrams = 3.52 ounces

 1 kilogram = 10 hectograms = 2.2 pounds
 1 quintal = 100 kilograms = 220.46 pounds
 1 metric ton = 10 quintals = 1.1 short tons

Square Measure

1 sq. centimeter = 100 sq. millimeters = .155 sq. inch
 1 sq. decimeter = 100 sq. centimeters = 15.5 sq. inches
 1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. feet
 1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. feet
 1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 acres
 1 sq. kilometer = 100 sq. hectometers = .386 sq. mile

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = .06 cu. inch
 1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. inches
 1 cu. meter = 1000 cu. decimeters = 35.31 cu. feet

Approximate Conversion Factors

To change	To	Multiply by	To change	To	Multiply by
inches	centimeters	2.540	ounce-inches	newton-meters	.007062
feet	meters	.305	centimeters	inches	.394
yards	meters	.914	meters	feet	3.280
miles	kilometers	1.609	meters	yards	1.094
square inches	square centimeters	6.451	kilometers	miles	.621
square feet	square meters	.093	square centimeters	square inches	.155
square yards	square meters	.836	square meters	square feet	10.764
square miles	square kilometers	2.590	square meters	square yards	1.196
acres	square hectometers	.405	square kilometers	square miles	.386
cubic feet	cubic meters	.028	square hectometers	acres	2.471
cubic yards	cubic meters	.765	cubic meters	cubic feet	35.315
fluid ounces	milliliters	29.573	cubic meters	cubic yards	1.308
pints	liters	.473	milliliters	fluid ounces	.034
quarts	liters	.946	liters	pints	2.113
gallons	liters	3.785	liters	quarts	1.057
ounces	grams	28.349	liters	gallons	.264
pounds	kilograms	.454	grams	ounces	.035
short tons	metric tons	.907	kilograms	pounds	2.205
pound-feet	newton-meters	1.356	metric tons	short tons	1.102
pound-inches	newton-meters	.11296			

Temperature (Exact)

°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C
----	------------------------	----------------------------	---------------------	----

