
MATLAB® Production Server™

Server Management Guide



MATLAB®

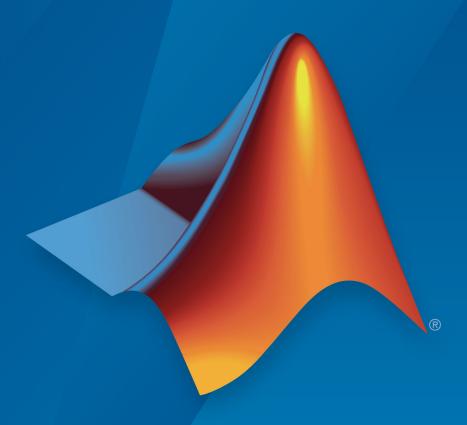

How to Contact MathWorks



Latest news: www.mathworks.com

Sales and services: www.mathworks.com/sales_and_services

User community: www.mathworks.com/matlabcentral

Technical support: www.mathworks.com/support/contact_us

T

Phone: 508-647-7000



The MathWorks, Inc. 3 Apple Hill Drive Natick, MA 01760-2098

MATLAB[®] Production Server[™] Management Guide

© COPYRIGHT 2012-2018 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

October 2014 March 2015 September 2015 March 2016 September 2016 March 2017 September 2017 March 2018	Online only	New for Version 1.2 (Release 2014a) Revised for Version 2.0 (Release 2014b) Revised for Version 2.1 (Release 2015a) Revised for Version 2.2 (Release 2015b) Revised for Version 2.3 (Release 2016a) Revised for Version 2.4 (Release 2016b) Revised for Version 3.0 (Release 2017a) Revised for Version 3.0.1 (Release R2017b) Revised for Version 3.1 (Release R2018a) Revised for Version 4.0 (Release R2018b)
September 2018	Online only	Revised for Version 4.0 (Release R2018b)

Contents

Server Management

	ш
	п

Server Overview	1-2 1-2
How Does a Server Manage Work?	1-2
Create a Server	1-5
Prerequisites	1-5
Procedure	1-5
Edit the Configuration File	1-7
About the Server Configuration File	1-7
Common Customizations	1-7
Specify the Default MATLAB Runtime for New Server	
Instances	1-9
Run mps-setup in Non-Interactive Mode for Silent Install	1-9
11un mpc cocup 111 11011 111011 uc 111 uc 101 0110111 11101111 1111	
Specify the MATLAB Runtime for a Server Instance	1-11
Start a Server Instance	1-12
Prerequisites	1-12
Procedure	1-12
riocedule	1-12
Chang the Deulemahle Angling	1 12
Share the Deployable Archive	1-13
Support Multiple MATLAB Versions	1-14
How the Server Instance Selects the MATLAB Runtime to	
Use	1-14
Changes to Worker Management	1-15
Control Worker Restarts	1-16
Restart Workers Based on Up Time	1-16
Restart Workers Based on Amount of Memory in Use	1-16

	Install a Server Instance as a Windows Service	1-18
	Create a New Server Instance as a Windows Service Make an Existing Server Instance a Windows Service	1-18 1-18
	rance an Existing Server Instance a Windows Service	1 10
2	Manage Licenses for MATLAB Production Se	rver
_	Specify or Verify License Server Options in Server	
	Configuration File	2-2
	Verify Status of License Server using mps-status	2-3
	Force a License Checkout Using mps-license-reset	2-4
	Secure a Se	rver
3		
	Overview	3-2
	Enable Security	3-3
	Configure Client Authentication	3-4
	Specify Access to MATLAB Programs	3-6
	Adjust Security Protocols	3-7
	Improve Startup Time When Security Is Activated	3-8
	Access Control	3-9
	Access Control Configuration File	3-9 3-10

	Troublesho
Ver	ify Server Status
	Procedure
Dia	gnose a Server Instance
Dia	gnose a Corrupted MATLAB Runtime
Ser	ver Diagnostic Tools
	Log Files
Mai	nage Log Files
ı·ıu.	Best Practices for Log Management
	Setting Log File Detail Levels
Con	nmon Error Messages and Resolutions
	Error: Bad MATLAB Runtime Instance
	Error: Server Instance not Specified
	Error: invalid target host or port
	Impact of Server Configurations on Proce Asynchronous Req

Impact of Server Configurations on Processing Asynchronous Requests

5-2

Set Up MATLAB	Production Server Dashboa
Set Up and Log In to MATLA	B Production Server
-	
Reset the Admin Password	
Remove MATLAB Production	Server Dashboard
	Commands — Alphabetical L
Configuration	Properties— Alphabetical L

Server Management

- "Server Overview" on page 1-2
- "Create a Server" on page 1-5
- "Edit the Configuration File" on page 1-7
- "Specify the Default MATLAB Runtime for New Server Instances" on page 1-9
- "Specify the MATLAB Runtime for a Server Instance" on page 1-11
- "Start a Server Instance" on page 1-12
- "Share the Deployable Archive" on page 1-13
- "Support Multiple MATLAB Versions" on page 1-14
- "Control Worker Restarts" on page 1-16
- "Install a Server Instance as a Windows Service" on page 1-18

Server Overview

In this section...

"What Is a Server?" on page 1-2

"How Does a Server Manage Work?" on page 1-2

What Is a Server?

You can create any number of server instances using MATLAB Production Server software. Each server instance can host any number of deployable archives containing MATLAB code. You may find it helpful to create one server for all archives relating to a particular application. You can also create one server to host code strictly for testing, and so on.

A server instance is considered to be one unique configuration of the MATLAB Production Server product. Each configuration has its own options file (main_config) and diagnostic files (log files, Process Identification (pid) files, and endpoint files).

In addition, each server has its own auto_deploy folder, which contains the deployable archives you want the server to host for clients.

The server also manages the MATLAB Runtime (MATLAB Compiler), which enables MATLAB code to execute. The settings in main_config determine how each server interacts with the MATLAB Runtime to process clients requests. You can set these parameters according to your performance requirements and other variables in your IT environment.

How Does a Server Manage Work?

A server processes a transaction using these steps:


- 1 The client sends MATLAB function calls to the master server process (the main process on the server).
- 2 MATLAB function calls are passed to one or more MATLAB Runtime workers.
- 3 MATLAB functions are executed by the MATLAB Runtime worker.
- **4** Results of MATLAB function execution are passed back to the master server process.
- **5** Results of MATLAB function execution are passed back for processing by the client.

The server is the middleman in the MATLAB Production Server environment. It simultaneously accepts connections from clients, and then dispatches MATLAB Runtime workers—MATLAB sessions—to process client requests to the MATLAB Runtime. By defining and adjusting the number of workers and threads available to a server, you tune capacity and throughput respectively.

 Workers (capacity management) (num-workers) — The number of MATLAB Runtime workers available to a server.

Each worker dispatches one MATLAB execution request to the MATLAB Runtime, interacting with one client at a time. By defining and tuning the number of workers available to a server, you set the number of concurrent MATLAB execution requests that can be processed simultaneously. num-workers should roughly correspond to the number of cores available on the local host.

 Threads (throughput management) (num-threads) — The number of threads (units of processing) available to the master server process.

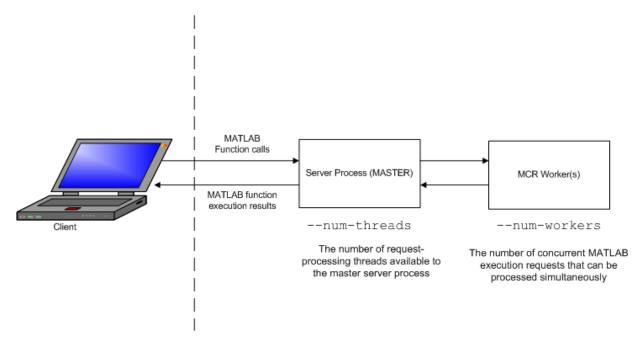

MATLAB Production Server Data Flow from Client to Server and Back

The server does not allocate a unique thread to each client connection. Rather, when data is available on a connection, the required processing is scheduled on a pool of threads. --num-threads sets the size of that pool (the number of available request-processing threads) in the master server process. The threads in the pool do not execute MATLAB code directly. Instead, there is a single thread within each MATLAB Runtime worker process that executes MATLAB code on the client's behalf. The number of threads you define to a server should roughly correspond to the number of cores available on the local host.

Create a Server

In this section...

"Prerequisites" on page 1-5

"Procedure" on page 1-5

Prerequisites

Before creating a server, ensure you have:

- Installed MATLAB Production Server software.
- Added the script folder to your system PATH environment variable. Doing so enables you to run server commands such as mps-new from any folder on your system.

Note You can run server commands from the script folder. The script folder is located at \$MPS_INSTALL\script, where \$MPS_INSTALL is the location where MATLAB Production Server is installed. For example, on Windows, the default location is: C:\Program Files\MATLAB\MATLAB Production Server\ver\script. ver is the version of MATLAB Production Server.

Procedure

Before you can deploy your MATLAB code with MATLAB Production Server, you need to create a server to host your deployable archive.

A server instance is considered to be one unique configuration of the MATLAB Production Server product. Each configuration has its own parameter settings file (main_config) as well as its own set of diagnostic files.

To create a server configuration or instance, do the following:

- **1** From the system command prompt, navigate to where you want to create your server instance.
- **2** Enter the mps new command from the system prompt:

```
mps-new [path/]server_name [-v]
```

where:

- *path* is the path to the server instance and configuration you want to create for use with the MATLAB Production Server product. When specifying a path, ensure the path ends with the *server name*.
 - If you are creating a server instance in the current folder, you do not need to specify a full path. Only specify the server name.
- server_name is the name of the server instance and configuration you want to create.
- -v enables verbose output, giving you information and status about each folder created in the server configuration.

Upon successful completion of the command, MATLAB Production Server creates a new server instance.

Edit the Configuration File

In this section...

"About the Server Configuration File" on page 1-7

"Common Customizations" on page 1-7

About the Server Configuration File

To change any MATLAB Production Server properties, edit the main_config configuration file that corresponds to your specific server instance:

server_name/config/main_config

When editing main config, remember these coding considerations:

- Each server has its own main_config configuration file.
- You enter only one configuration property and related options per line. Each configuration property entry starts with two dashes (--).
- Any line beginning with a pound sign (#) is ignored as a comment.
- Lines of white space are ignored.

Common Customizations

- "Setting Default Port Number for Client Requests" on page 1-7
- "Setting Number of Available Workers" on page 1-7
- "Setting Number of Available Threads" on page 1-8

Setting Default Port Number for Client Requests

Use the http property to set the default port number on which the server listens for client requests.

Setting Number of Available Workers

Use the num-workers property to set the number of concurrent MATLAB execution requests that can be processed simultaneously.

Setting Number of Available Threads

Use the num-threads property to set the number of request-processing threads available to the master server process.

Note For .NET Clients, the HTTP 1.1 protocol restricts the maximum number of concurrent connections between a client and a server to two.

This restriction only applies when the client and server are connected remotely. A local client/server connection has no such restriction.

To specify a higher number of connections than two for remote connection, use the NET classes System.Net.ServicePoint and System.Net.ServicePointManager to modify maximum concurrent connections.

For example, to specify four concurrent connections, code the following:

Specify the Default MATLAB Runtime for New Server Instances

Each server that you create with MATLAB Production Server has its own configuration file that defines various server management criteria.

The mps-setup command line wizard searches for MATLAB Runtime instances and sets the default path to the MATLAB Runtime for all server instances you create with the product.

To run the command line wizard, do the following after first downloading and performing the "Download and Install the MATLAB Runtime":

- 1 Ensure you have logged on with administrator privileges.
- 2 At the system command prompt, run mps-setup from the script folder.

Alternately, add the script folder to your system PATH environment variable to run mps-setup from any folder on your system. The script folder is located at \$MPS_INSTALL\script, where \$MPS_INSTALL is the location in which MATLAB Production Server is installed. For example, on Windows®, the default location is C: \Program Files\MATLAB\MATLAB Production Server\ver\script\mps-setup.

ver is the version of MATLAB Production Server to use.

- **3** Follow the instructions in the command line wizard.
 - The wizard will search your system and display installed MATLAB Runtime instances.
- **4** Enter y to confirm or n to specify a default MATLAB Runtime for all server configurations created with MATLAB Production Server.

If mps-setup cannot locate an installed MATLAB Runtime on your system, you will be prompted to enter a path name to a valid instance.

Run mps-setup in Non-Interactive Mode for Silent Install

You can also run mps-setup without interactive command input for silent installations.

To run mps-setup, specify the path name of the MATLAB Runtime as a command line argument. For example, on Windows:

mps-setup "C:\Program Files\MATLAB\MATLAB Runtime\mcrver"

mcrver is the version of the MATLAB Runtime to use.

Specify the MATLAB Runtime for a Server Instance

To specify the installed location of the MATLAB Runtime for your server instance:

- **1** If the server instance is running, stop it.
- **2** Open the configuration file for the instance in a text editor.

The configuration file is located at <code>instanceRoot/config/main config.</code>

- **3** Locate the entry for the mcr_root property.
 - --mcr-root mCRuNsETtOKEN
- 4 Modify the mcr_root property to point to the installed MATLAB Runtime you want to work with.

For example:

--mcr-root C:\Program Files\MATLAB\MATLAB Runtime\vnnn

Note You *must* specify the version number of the MATLAB Runtime (v*nnn*). MATLAB Runtime versions you specify must be compatible with MATLAB Production Server.

5 Restart the server instance.

Start a Server Instance

In this section...

"Prerequisites" on page 1-12

"Procedure" on page 1-12

Prerequisites

Before attempting to start a server, verify that you have:

- Installed the MATLAB Runtime
- Created a server instance on page 1-5
- Specified the default MATLAB Runtime for the instance on page 1-9

Procedure

To start a server instance, complete the following steps:

- 1 Open a system command prompt.
- 2 Enter the mps-start command:

```
mps-start [-C path/]server_name [-f]
```

where:

- -C path/ Path to the server instance you want to create. path should end with the server name.
- server_name Name of the server instance you want to start or stop.
- ${\sf f}$ Forces command to succeed, regardless or whether the server is already started or stopped.

Upon successful completion of the command, the server instance is active.

Note If needed, use the mps-status command to verify the server is running.

Share the Deployable Archive

After you create the deployable archive, share it with clients of MATLAB Production Server by copying it to your server, for hosting.

In order to share the deployable archive, a server must be created and started.

- 1 Locate your deployable archive in the for_redistribution_files_only folder of your compiler project folder.
 - It is named project name.ctf.
- 2 Copy project_name.ctf to the \server_name\auto_deploy folder in your server instance.
 - For example, if your server is named prod_server_1 and located in C:\tmp, copy project_name.ctf to C:\tmp\prod_server_1\auto_deploy.

Support Multiple MATLAB Versions

In this section...

"How the Server Instance Selects the MATLAB Runtime to Use" on page 1-14

"Changes to Worker Management" on page 1-15

MATLAB Production Server instances can host deployable archives compiled using multiple versions of MATLAB Compiler SDK $^{\text{\tiny TM}}$. You configure a server instance to do this by adding multiple mcr-root properties to the configuration file for the instance:

1 Install the required versions of the MATLAB Runtime.

Note

- A server instance should only be configured to use MATLAB Runtime roots on a local file system. Otherwise, a network partition may cause worker processes to fail.
- All values for mcr-root must be for the same OS/hardware combination.
- **2** If the server instance is running, stop it.
- **3** Open the configuration file for the instance in a text editor.

The configuration file is at *instanceRoot*/config/main config.

- 4 Locate the entry for the mcr-root property.
 - --mcr-root mCRuNsETtOKEN
- **5** For each version of the MATLAB Runtime the instance supports, add an instance of the mcr_root property.

For example, to configure the instance to use the v81 and v82 versions of the MATLAB Runtime.

- --mcr-root C:\Program Files\MATLAB\MATLAB Compiler Runtime\v81
- --mcr-root C:\Program Files\MATLAB\MATLAB Runtime\v82
- **6** Restart the server instance.

How the Server Instance Selects the MATLAB Runtime to Use

Once the server instance is configured to use multiple versions of MATLAB Runtime, it scans the list of provided MATLAB Runtime installations in order from first to last and

chooses the first MATLAB Runtime installation capable of processing the request. A MATLAB Runtime installation can process a request if it is compatible with the version of MATLAB used to create the deployable archive containing the function being evaluated.

Note Since the server instance always chooses the first compatible version of MATLAB Runtime, configuring the server instance with multiple instances of the same MATLAB Runtime version has no effect on performance.

Changes to Worker Management

Configuring a server instance to use multiple MATLAB Runtime versions also changes how the server instance manages the workers used to process requests.

When using a single MATLAB Runtime installation, the server instance starts workers as needed until num-workers workers are running. Once running, workers maybe restarted in response to the worker-restart-interval property or the worker-restart-memory-limit property. Workers are never fully stopped.

Once a server instance starts using multiple MATLAB Runtime versions, it dynamically manages the worker pool. The server instance starts new workers as needed until numworkers workers are running. The worker instances are spread out over the different MATLAB Runtime versions. Once num-workers workers are running, the server instance returns workers to the pool of available workers based on the worker-memory-trigger property and the queue-time-trigger property. Once worker is returned to the pool, it can be allocated to process new requests using any of the configured MATLAB Runtime versions.

Control Worker Restarts

In this section...

"Restart Workers Based on Up Time" on page 1-16

"Restart Workers Based on Amount of Memory in Use" on page 1-16

Restart Workers Based on Up Time

As worker processes evaluate MATLAB functions, the MATLAB workspace accumulates saved state and other data. This accumulated data can occasionally cause a worker process to fail. One way to avoid random worker failures is to configure the server instances to restart worker processes when they have been running for set period.

- **1** If the server instance is running, stop it.
- **2** Open the configuration file for the instance in a text editor.

The configuration file is at *instanceRoot*/config/main config.

- **3** Locate the entry for the worker-restart-interval property.
 - --worker-restart-interval 12:00:00
- **4** Change the value to the desired restart interval.

For example, restart workers at intervals of 1 hour, 29 minutes, 5 seconds.

- --worker-restart-interval 1:29:05
- **5** Restart the server instance.

Restart Workers Based on Amount of Memory in Use

As worker processes evaluate MATLAB functions, the MATLAB workspace accumulates saved state and other data. This accumulated data can occasionally cause a worker process to fail. One way to avoid random worker failures is to configure the server instances to restart worker processes when they begin consuming a predefined amount of memory.

This is done by adjusting three configuration properties:

 worker-memory-check-interval — Interval at which workers are polled for memory usage

- worker-restart-memory-limit Size threshold at which to consider restarting a worker
- worker-restart-memory-limit-interval Interval for which a worker can exceed its memory limit before restart

To adjust memory-based restart thresholds:

- **1** If the server instance is running, stop it.
- **2** Open the configuration file for the instance in a text editor.

The configuration file is at *instanceRoot*/config/main_config.

- **3** Locate the entry for the worker-memory-check-interval property.
 - --worker-memory-check-interval 0:00:30
- **4** Change the value to the desired restart interval.

For example, restart workers at intervals of 1 hour, 29 minutes, 5 seconds.

- --worker-memory-check-interval 1:29:05
- **5** Add an entry for the worker-restart-memory-limit property.

For example, consider restarting workers when they consume 1 GB of memory.

- --worker-restart-memory-limit 1GB
- 6 Add an entry for the worker-restart-memory-limit-interval property.

For example, restart workers when they exceed the memory limit for 1 hour.

worker-restart-memory-limit-interval 1:00:00

7 Restart the server instance.

Install a Server Instance as a Windows Service

In this section...

"Create a New Server Instance as a Windows Service" on page 1-18

"Make an Existing Server Instance a Windows Service" on page 1-18

Create a New Server Instance as a Windows Service

To create a new MATLAB Production Server instance and register it as a Windows service, use the mps-new command with the --service option.

```
mps-new /tmp/server_1 --service
```

You can change the name, description, and user for the Windows service from the defaults using optional flags to the mps-new command.

The Windows service created for the server instance does not start automatically. You can edit the configuration for the instance before starting it is using the mps-start command.

The Windows service created for the server instance is configured to start when the machine starts. When the host machine is restarted, the server instance restarts with it.

Make an Existing Server Instance a Windows Service

To create a new Windows service for an existing MATLAB Production Server instance, use the mps-service command with the create option.

```
mps-service -C /tmp/server_1 create
```

You can change the name, description, and user for the Windows service from the defaults using optional flags to the mps-service command.

The Windows service created for the server instance is configured to start when the machine starts. When the host machine is restarted, the server instance restarts with it.

Manage Licenses for MATLAB Production Server

- "Specify or Verify License Server Options in Server Configuration File" on page 2-2
- "Verify Status of License Server using mps-status" on page 2-3
- "Force a License Checkout Using mps-license-reset" on page 2-4

Specify or Verify License Server Options in Server Configuration File

Specify or verify values for License Server options in the server configuration file (main config). You create a server by using the mps-new command.

Edit the configuration file for the server. Open the file <code>server_name/config/main_config</code> and specify or verify parameter values for the following options. See the comments in the server configuration file for complete instructions and default values.

• license — Configuration option to specify the license servers and/or the license files. You can specify multiple license servers including port numbers (port_number@license_server_name), as well as license files, with one entry in main_config. List where you want the product to search, in order of precedence, using semi-colons (;) as separators on Windows or colons (:) as separators on Linux.

For example, on a Linux system, you specify this value for license:

--license 27000@hostA:/opt/license/license.dat:27001@hostB:./license.dat

The system searches these resources in this order:

- 1 27000@hostA: (hostA configured on port 27000)
- 2 /opt/license/license.dat (local license data file)
- **3** 27001@hostB: (hostB configured on port 27001)
- 4 ./license.dat (local license data file)
- license-grace-period The maximum length of time MATLAB Production Server responds to HTTP requests, after license server heartbeat has been lost. See FLEXIm® documentation for more on heartbeats and related license terminology.
- license-poll-interval The interval of time that must pass, after license server heartbeat has been lost and MATLAB Production Server stops responding to HTTP requests, before license server is polled, to verify and checkout a valid license. Polling occurs at the interval specified by license-poll-interval until license has been successfully checked-out. See FLEXIm documentation for more on heartbeats and related license terminology.

Verify Status of License Server using mps-status

When you enter an ${\tt mps-status}$ command, the status of the server ${\it and}$ the associated license is returned.

For detailed descriptions of these status messages, see "License Server Status Information".

Force a License Checkout Using mps-license-reset

Use the mps-license-resetcommand to force MATLAB Production Server to checkout a license. You can use this command at any time, providing you do not want to wait for MATLAB Production Server to verify and checkout a license at an interval established by a server configuration option such as license-grace-period or license-poll-interval.

Secure a Server

- "Overview" on page 3-2
- "Enable Security" on page 3-3
- "Configure Client Authentication" on page 3-4
- "Specify Access to MATLAB Programs" on page 3-6
- "Adjust Security Protocols" on page 3-7
- "Improve Startup Time When Security Is Activated" on page 3-8
- "Access Control" on page 3-9

Overview

MATLAB Production Server uses HTTPS to establish secure connections between server instances and clients. The HTTPS layer provides certificate-based authentication for both clients and server instances. It also provides an encrypted data path between the clients and server instances. You can configure the level of security provided by the HTTPS layer and the security protocols it supports.

MATLAB Production Server provides a certificate-based authorization mechanism for restricting access to specific programs. Using this mechanism, you specify the MATLAB programs that a client can access.

Enable Security

To enable security, add the following to the server instance's configuration:

- HTTPS port
- Valid certificate stored in a PEM formatted certificate chain
- Valid private key stored in PEM format

The following configuration excerpt configures a server instance to accept secure connections on port 9920, use the certificate stored in ./x509/my-cert.pem, and use the unencrypted private key stored in ./x509/my-key.pem.

```
...
--https 9920
--x509-cert-chain ./x509/my-cert.pem
--x509-private-key ./x509/my-key.pem
```

The default security settings allow all clients to access all programs hosted by the server instance. The server instance does not authenticate the clients, nor does it perform any authorization. The default settings enable all security protocols and enable all cipher suites, save for eNULL.

In production settings that require greater security than that provided by an unencrypted private key, use an encrypted private key. You specify the passphrase for decrypting the private key in a file with owner-read-only access, and use the --x509-passphrase property to tell the server instance about it.

```
--https 9920

--x509-cert-chain ./x509/my-cert.pem

--x509-private-key ./x509/my-key.pem

--x509-passphrase ./x509/my-passphrase

...
```

Configure Client Authentication

To ensure that only trusted client applications have access to a server instance, configure the server instance to require client authentication:

- 1 Set the ssl-verify-peer-mode configuration property to verify-peer-require-peer-cert.
- 2 Configure the server instance to use the system provided CA store, a server specific CA store, or both.

Use these configuration properties to control the CA stores used by the server instance:

- x509-ca-file-store specifies a PEM formatted CA store to authenticate clients.
- x509-use-system-store directs the server instance to use the system's CA store to authenticate clients.

Note x509-use-system-store does not work on Windows.

3 Optionally configure the server instance to respect any certificate revocation lists (CRLs) in the CA store.

Specify this behavior by adding the x509-use-crl property to the server's configuration. If this property is not specified, the server instance ignores the CRLs and may authenticate clients using revoked credentials.

Caution You must add a CRL list to the server's CA store before adding the x509-use-crl property. If the CA store does not include a CRL list, the server crashes.

This configuration excerpt configures a server instance to authenticate clients using the system CA store and to respect CRLs:

```
...
--https 9920
--x509-cert-chain ./x509/my-cert.pem
--x509-private-key ./x509/my-key.pem
--x509-passphrase ./x509/my-passphrase
--ssl-verify-peer-mode verify-peer-require-cert
--x509-use-system-store
```

--x509-use-crl

Specify Access to MATLAB Programs

By default, server instances allow all clients to access all hosted MATLAB programs. You control this behavior using the ssl-allowed-client configuration property. The ssl-allowed-client property specifies a comma-separated list of clients, identified by their certificate's common name, that are allowed to access MATLAB programs. You also use the property to list specific MATLAB programs that a client is allowed to access.

If you do not specify the ssl-allowed-client property, the server instance does not restrict access to the hosted MATLAB programs. After you add an entry for the ssl-allowed-client property, the server instance authorizes only the listed clients to access the hosted MATLAB programs.

To only authorize clients with the common names jim, judy, and ash to use the MATLAB programs hosted on a server instance, add this configuration excerpt:

```
--ssl-allowed-client jim, judy, ash
```

You can restrict access further by only authorizing specific clients to have access to specific MATLAB programs. Do this by adding <code>:allowedPrograms</code> to the value of the <code>ssl-allowed-client</code> property. <code>allowedPrograms</code> is a comma-separated list of program names.

To allow clients with the common name jim access to all hosted programs, allow clients with the common name judy access to the programs tail and zap, and allow clients with the common name ash or joe access to the programs saw and travel, add this configuration excerpt:

```
--ssl-allowed-client jim
--ssl-allowed-client judy:tail,zap
--ssl-allowed-client ash,joe:saw,travel
```

Adjust Security Protocols

By default, MATLAB Production Server instances try to use TLSv1.2 to secure connections between client and server. It allows connections using SSLv2, SSLv3, and TLSv1. You control the enabled protocols using the --ssl-protocols property. This property specifies the protocols the server instance can use.

To disable SSLv2 and SSLv3 protocols, add this configuration excerpt:

```
--ssl-protocols TLSv1
```

Because SSLv2 and SSLv3 are not included in the list, the server instance does not enable the protocols.

You can restrict the cipher suites used by the server instance with the ssl-ciphers property. After you add the property to a server instance's configuration, the server instance will use only the listed cipher suites.

To enable only high strength cipher suites, you add this configuration excerpt:

```
--ssl-ciphers HIGH
```

Improve Startup Time When Security Is Activated

When a server instance is configured to use HTTPS, it generates an ephemeral DH key at startup. Generating the DH key at startup provides more security than reading it from a file on disk. However, this can add a couple of minutes to a server instance's startup time.

If you need the server instance to start up without delay and are not concerned about the loss of security, you can configure the server instance to read the ephemeral DH key from a file using the ssl-tmp-dh-param configuration property. The ssl-tmp-dh-param property specifies the file storing the DH key in PEM format.

Access Control

Access Control Configuration File

To provide an identity to each user, you define an access control configuration file in JSON format. Each identity provider has a different configuration file to enable authorization. The default name for the JSON file for Azure® Active Directory is azure ad.json.

Azure Active Directory configuration parameters are as follows:

- tenantId (Required): Azure Active Directory tenant ID. To locate your tenant ID, go
 to https://portal.azure.com. On the left panel, select Azure Active Directory, then on
 the Overview panel, select Properties. The hexadecimal code under Directory ID is
 your tenant ID.
- serverAppId (Required): MATLAB Production Server application ID as registered in Azure Active Directory. To locate your serverAppID, go to https://portal.azure.com.
 On the left panel, select Azure Active Directory, then on the Overview panel, select App registrations. Then select MPS server to find the Application ID, which is your serverAppID.
- jwksUri (Optional): Used to get Azure Active Directory JSON Web Key Set that is used to verify token signature. Default is https://login.microsoftonline.com/common/discovery/keys.
- issuerBaseUri (Optional): Used with tenantId to validate issuer of the token. For Azure Active Directory, default is https://sts.windows.net/.
- jwksTimeOut (Optional): Maximum time the jwks request is allowed to take. Default is 120 seconds.

The format of the configuration file is as follows:

```
{
  "tenantId": "54ss4lk1-8428-7256-5fvh-d5785gfhkjh6",
  "serverAppId": "j21n12bg-3758-3r78-v25j-35yj4c47vhmt",
  "jwksUri": "https://login.microsoftonline.com/common/discovery/keys",
  "issuerBaseUri": "https://sts.windows.net/",
  "jwksTimeOut": 120
}
```

Access Control Policy File

To use access control for MATLAB Production Server, the server admin should define an access control policy file in JSON format. The default name for the JSON file is ac_policy.json.

The policy file is read on server startup. If it does not exist or contains errors, the server does not start, and an error message is written to main.log file found in the log-root directory.

Once the server has started, the policy file is scanned every five seconds for changes. If the policy file is deleted or contains errors, the server continues to run, but all requests are denied. Again, an error message is written to the main.log file.

The JSON file has a single JSON object that defines the schema version and a *Policy Block*. The *Policy Block* consists of a list of policies. Each policy contains a *Rule Block* that defines a set of rules and consists of a *Subject Block*, a *Resource Block*, and an *Action Block*.

```
"version": "<major#>.<minor#>.<patch#>",

    Policy Block

policy": [
   "id": "<policy id>",
   "description": "<policy description>",
                                                              – Rule Block
   "rule": [
        "id": "<rule id>",
       "description": "<rule_description>",

    Subject Block

        "subject": { "groups": [ <group_id>, <group_id>, ... ] },
        resource": { "ctf": [ <ctf_name>, <ctf_name>, ... ] },
        "action": [ "execute" ]
                                                        -Action Block
     },
       "id": "<rule id>",
       "description": "<rule description>",
       "subject": { "groups": [ <group_id>, <group_id>, ... ] },
       "resource": { "ctf": [ <ctf_name>, <ctf_name>, ... ] },
       "action": [ "execute" ]
```

The schema version has a value that is a JSON string in the format <major#>.<minor#>.<patch#>, with each number specified as a nonnegative integer.

Policy Block

The policy block contains a list of policies required for access control. Currently, only a single policy can be specified in a policy file.

An ID is required for each policy. <policy_id> must be unique for each policy. Any leading or trailing white space is removed.

The description is optional for a policy.

Rule Block

The rule block contains a list of rule objects.

Multiple rules can exist in a rule block, for example: "rule": [<rule>, <rule>, ...].

An ID is required for each rule. <rule_id> must be unique for each rule. Any leading or trailing white space is removed.

The description is optional for a rule.

Subject Block

The subject block of a rule defines who can access the resources. Currently, only the *groups* attribute is supported.

```
"subject" : {"groups": ["<group_id>", "<group_id>", ...]}
```

For Azure Active Directory, a list of group IDs can be specified to control which groups can access the resources defined in the rule.

Get Group ID from Azure Active Directory Based on Group Display Name

- 1 Open Azure Active Directory graph explorer on https://graphexplorer.azurewebsites.net, and login.
- 2 Use query https://graph.windows.net/<tenant>/groups? \$filter=startswith(displayName,'<groupname>') where <tenant> is the tenant name, and <groupname> is the name of a specific group.
- **3** Search for objectId of the specific group in the response.

Get All Group IDs for a Certain User from Azure Active Directory

- 1 Open Azure Active Directory graph explorer on https://graphexplorer.azurewebsites.net, and login.
- 2 Use query https://graph.windows.net/<tenant>//<tenant>/users/ <username>@<tenant>/memberOf where <tenant> is the tenant name, and <username> is the name of a specific user.
- **3** For all groups where **securityEnabled** is true, search for **objectId** in the response.

Resource Block

The resource block of a rule describes the object being accessed. Currently, only a ctf file can be accessed.

```
"resource" : {"ctf": ["<ctf_name>", "<ctf_name>", ...]}
```

You can use ctf_name to access multiple ctf files by using the wildcard character *. For example, if you want to access all ctf files whose names start or end with 'test', you would specify <ctf_name> as test* or *test, respectively. If you use * as the <ctf name>, you can access all the ctf files.

Action Block

The action block of a rule describes the action being attempted on the resource. Currently, only the action execute is supported.

```
"action" : ["execute"]
```

Example of a JSON Policy File

The following example defines an access control policy with three rules.

Access is denied for all other requests.

```
{
  "version": "1.0.0",
  "policy" : [
      "id": "policy1",
      "description": "MPS Access Control policy for XYZ Corp.",
      "rule": [
        {
          "id": "rule1",
          "description": "group A can execute ctf magic",
          "subject": { "groups": ["aaaaaaaa-aaaa-aaaa-aaaa-aaaaaaaaaa"] },
"resource": { "ctf": ["magic"] },
          "action": ["execute"]
        },
          "id": "rule2",
          "description": "group A and group B can execute ctf monteCarlo and fastFouri
          "subject": {  "groups": ["aaaaaaaa-aaaa-aaaa-aaaa-aaaaaaaaaa",  "bbbbbbbb-bb
          "resource": { "ctf": ["monteCarlo", "fastFourier"] },
          "action": ["execute"]
        },
          "id": "rule3",
          "description": "QE group C can execute any ctf starts with test",
          "subject": { "groups": ["ccccccc-ccc-cccc-cccc-cccccccc"] },
          "resource": { "ctf": ["test*"] },
          "action": ["execute"]
        }
      ]
   }
  ]
}
```

See Also

access-control-policy

External Websites

https://docs.microsoft.com/en-us/azure/active-directory/develop/active-directory-graph-api-quickstart

Troubleshooting

- "Verify Server Status" on page 4-2
- "Diagnose a Server Instance" on page 4-5
- "Diagnose a Corrupted MATLAB Runtime" on page 4-6
- "Server Diagnostic Tools" on page 4-7
- "Manage Log Files" on page 4-9
- "Common Error Messages and Resolutions" on page 4-11

Verify Server Status

In this section... "Procedure" on page 4-2 "Verify Status of a Server" on page 4-3

Procedure

To verify the status of a server instance, complete the following steps:

- **1** Open a system command prompt.
- **2** Enter the following command:

```
mps-status [-C path/]server_name
```

where:

- -C path/ Path to the server instance and configuration you want to create. path should end with the server name.
- *server_name* Name of the server instance and configuration you want to start or stop.

Upon successful completion of the command, the server status displays.

License Server Status Information

In addition to the status of the server, mps-status also displays the status of the license server associated with the server you are verifying.

Possible statuses and their meanings follow:

This License Server Status Message	Means
	The server is operating with a valid license. The server is communicating with the License Manager, and the proper number of license keys are checked out.

This License Server Status Message	Means
WARNING: lost connection to license server - request processing will be disabled at time unless connection to license server is restored	The server has lost communication with the License Manager, but the server is still fully operational and will remain operational until the specified time. At time, if connectivity to the license server has not been restored, request processing will be disabled until licensing is reestablished.
ERROR: lost connection to license server - request processing disabled	The server has lost communication with the License Manager for a period of time exceeding the grace period. Request processing has been suspended, but the server actively attempts to reestablish communication with the License Manager until it succeeds, at which time normal request processing resumes.
ERROR: lost connection to license server - request processing disabled	The server has lost communication with the License Manager for a period of time exceeding the grace period. Request processing has been suspended, but the server actively attempts to reestablish communication with the License Manager until it succeeds, at which time normal request processing resumes.

Verify Status of a Server

This example shows how to verify the status of the server instance you started in the previous example.

In this example, you verify the status of $prod_server_1$, from a location other than the server instance folder (C:\tmp\prod_server_1).

- 1 Open a system command prompt.
- 2 To verify prod_server_1 is running, enter this command:

```
\verb|mps-status -C \tmp\prod_server_1|
```

If prod_server_1 is running, the following status is displayed:

\tmp\prod_server_1 STARTED
license checked out

This output confirms $prod_server_1$ is running and the server is operating with a valid license.

For more information on the STOPPED status, see mps-stop and mps-restart.

For more information about license status messages, see "License Server Status Information" on page 4-2.

Diagnose a Server Instance

To diagnose a problem with a server instance or configuration of MATLAB Production Server, do the following, as needed:

- Check the logs for warnings, errors, or other informational messages.
- Check Process Identification Files (PID files) for information relating to problems with MATLAB Runtime worker processes.
- Check Endpoint Files for information relating to problems relating to the server's bound external interfaces for example, a problem connecting a client to a server.
- Use server diagnostic tools, such as mps-which, as needed.

Diagnose a Corrupted MATLAB Runtime

This example shows a typical diagnostic procedure you might follow to solve a problem starting server prod_server_x.

After you issue the command:

```
mps-start prod server x
```

from within the server instance folder (prod server x), you get the following error:

```
Server process exited with return code: 4 (check logs for more information) Error while waiting for server to start: The I/O operation has been aborted because of either a thread exit or an application request
```

To solve this issue, you might check the log files for more detailed messages, as follows:

- 1 Navigate to the server instance folder (prod server x) and open the log folder.
- 2 Open main.err with any text editor. Note the following message listed under Server startup error:

```
Dynamic exception type: class std::runtime_error std::exception::what: bad MATLAB Runtime installation: C:\Program Files\MATLAB\MATLAB Runtime\v82 (C:\Program Files\MATLAB\MATLAB Runtime\v82\bin\win64\mps_worker_app could not be found)
```

The message indicates the installation of the MATLAB Runtime is incomplete or has been corrupted. To solve this problem, reinstall the MATLAB Runtime.

Server Diagnostic Tools

In this section...

"Log Files" on page 4-7

"Process Identification Files (PID Files)" on page 4-7

"Endpoint Files" on page 4-7

Log Files

Each server writes a log file containing data from both the main server process, as well as the workers, named <code>server_name/log/main.log</code>. You can change the primary log folder name from the default value (log) by setting the option log-root in main config.

The primary log folder contains the main.log file, as well as a symbolic link to this file with the auto-generated name of main date fileID.log.

The stdout stream of the main server process is captured as log/main.out.

The stderr stream of the main server process is captured as log/main.err.

Process Identification Files (PID Files)

Each process that the server runs generates a Process Identification File (PID File) in the folder identified as pid-root in main_config.

The main server PID file is main.pid; for each MATLAB Runtime worker process, it is worker-n.pid, where n is the unique identifier of the worker.

PID files are automatically deleted when a process exits.

Endpoint Files

Endpoint files are generated to capture information about the server's bound external interfaces. The files are created when you start a server instance and deleted when you stop it.

 $server_name/endpoint/http$ contains the IP address and port of the clients connecting to the server. This information can be useful in the event that zero (0) is specified in main_config, indicating that the server bind to a free port.

Manage Log Files

In this section...

"Best Practices for Log Management" on page 4-9

"Log Retention and Archive Settings" on page 4-9

"Setting Log File Detail Levels" on page 4-10

Best Practices for Log Management

Use these recommendations as a guide when defining values for the options listed in "Log Retention and Archive Settings" on page 4-9.

- Avoid placing log-root and log-archive-root on different physical file systems.
- · Place log files on local drives, not on network drives.
- Send MATLAB output to stdout. Develop an appropriate, consistent logging strategy following best MATLAB coding practices. See MATLAB Programming Fundamentals for guidelines.

Log Retention and Archive Settings

Log data is written to the server's main.log file for as long as a specific server instance is active, or until midnight. When the server is restarted, log data is written to an archive log, located in the archive log folder specified by log-archive-root.

You can set parameters that define when main.log is archived using the following options in each server's main_config file.

- log-rotation-size When main.log reaches this size, the active log is written to an archive log (located in the folder specified by log-archive-root).
- log-archive-max-size When the combined size of all files in the archive folder (location defined by log-archive-root) reaches this limit, archive logs are purged until the combined size of all files in the archive folder is less than log-archivemax-size. Oldest archive logs are deleted first.

Specify values for these options using the following units and notations:

Represent these units of measure	Using this notation	Example
Byte	b	900b
Kilobyte (1024 bytes)	k	700k
Megabytes (1024 kilobytes)	m	40m
Gigabytes (1024 megabytes)	g	10g
Terabytes (1024 gigabytes)	t	2t
Petabytes (1024 terabytes)	р	1p

Note The minimum value you can specify for log-rotation-size is 1 megabyte.

On Windows 32-bit systems, values larger than 2^{32} bytes are not supported. For example, specifying 5g is not valid on Windows 32-bit systems.

Setting Log File Detail Levels

The log level provides different levels of information for troubleshooting:

- error Notification of problems or unexpected results.
- warning Events that could lead to problems if unaddressed.
- $\bullet \quad \hbox{information} \hbox{High-level information about major server events}.$
- trace Detailed information about the internal state of the server.

The log level is set using the log-severity configuration property.

Before you call support, you should set logging levels to trace.

Common Error Messages and Resolutions

In this section...

"(404) Not Found" on page 4-11

"Error: Bad MATLAB Runtime Instance" on page 4-11 "Error: Server Instance not Specified" on page 4-11

"Error: invalid target host or port" on page 4-12

"Error: HTTP error: HTTP/x.x 404 Component not found" on page 4-12

(404) Not Found

Commonly caused by requesting a component that is not deployed on the server, or trying to call a function that is not exported by the given component.

Verify that the name of the deployable archive specified in your Uri is the same as the name of the deployable archive hosted in your auto deploy folder.

Error: Bad MATLAB Runtime Instance

Common causes of this message include:

• You are not properly qualifying the path to the MATLAB Runtime. You must include the version number. For example, you need to specify:

 ${\tt C:\Program\ Files\MATLAB\MATLAB\ Runtime\v.} n$

not

C:\Program Files\MATLAB\MATLAB Runtime

Error: Server Instance not Specified

MATLAB Production Server can't find the server you are specifying.

Ensure you are either entering commands from the folder containing the server instance, or are using the -C command argument to specify a precise location of the server instance.

For example, if you created server_1 in C:\tmp\server_1, you would issue the mps-start command from within that folder to avoid specifying a path with the -C argument:

```
cd c:\tmp\server_1
mps-start server 1
```

For more information, see "Start a Server Instance" on page 1-12.

Error: invalid target host or port

The port number specified has not been properly defined to your computer. Define a valid port and retry the command.

Error: HTTP error: HTTP/x.x 404 Component not found

This error can be caused by a number of reasons. Consult the "Log Files" on page 4-7 for further details on the precise cause of the problem.

Impact of Server Configurations on Processing Asynchronous Requests

Impact of Server Configurations on Processing Asynchronous Requests

MATLAB Production Server supports asynchronous execution of client requests. The following configurations in the server's main_config file impact the how the server supports this functionality:

- request-timeout
- server-memory-threshold
- server-memory-threshold-overflow-action

The request-timeout configuration parameter specifies the duration after which a request in a terminal states times out and gets deleted.

The server-memory-threshold configuration parameter specifies the size threshold of the server process at which point action needs to be taken to manage the responses. The size threshold includes both the size of the base server process plus any growth in the server process resulting from processing a client request.

The server-memory-threshold-overflow-action configuration parameter specifies the action to be taken when the memory size threshold of server process has been breached. The possible actions are that the responses be archived to disk or the request be purged.

Setting too small a request-timeout can lead to a request being timed out before a client fetches the response.

Since the server-memory-threshold includes both the size of the base server process plus any growth in the server process resulting from processing client requests, setting too small a server-memory-threshold can lead to responses being archived or purged before being retrieved.

Since the operating system governs memory management, the memory footprint size of the base server process may not return to its original size even after a response has been archived or purged. The size of the base server process in most cases ends up being larger than its original size. As a result, subsequent requests to the server may have a much smaller range of memory to work with before reaching the server-memory-threshold.

Setting the server-memory-threshold to be too large will result in a large server process footprint which may not be required.

These configuration parameters need to be set appropriately and carefully balanced in order to provide a suitable contract between a client and a server.

Set Up MATLAB Production Server Dashboard

- "Set Up and Log In to MATLAB Production Server Dashboard" on page 6-2
- "Remove MATLAB Production Server Dashboard" on page 6-7

Set Up and Log In to MATLAB Production Server Dashboard

In this section...

"Set Up the Dashboard" on page 6-2

"Log In to the Dashboard" on page 6-5

"Reset the Admin Password" on page 6-5

Set Up the Dashboard

Warning You must have admin privileges on Windows to complete setup.

To set up an instance of the MATLAB Production Server dashboard:

1 Open a Terminal or Command Window, and navigate to the dashboard folder in the MATLAB Production Server installation directory.

Platform	Default Directory Where the MATLAB Production Server dashboard is Installed	
	<pre>C:\Program Files\MATLAB\MATLAB Production Server \R2018b\dashboard</pre>	
Linux®	/usr/local/MATLAB/MATLAB_Production_Server/R2018b/dashboard	

2 Execute the script mps-dashboard with the setup option, and when prompted, specify the directory for dashboard setup. You must have write privileges to the directory from where you are running the mps-dashboard script, and to the directory where the dashboard is going to be set up.

Platform	Script for Dashboard Setup	
Windows	> mps-dashboard.bat setup	
(Administrato r)	For example:	
	> mps-dashboard.bat setup Specify a workspace directory for MATLAB Production Serv	er Dashboa
Linux	<pre>\$./mps-dashboard.sh setup</pre>	
	For example:	
	<pre>\$./mps-dashboard.sh setup Specify a workspace directory for MATLAB Production Server Dashboard:</pre>	/opt/mps/dash

You receive a message acknowledging that the dashboard has been successfully setup.

Tip To directly specify a directory when setting up the dashboard, use the -C option after the setup option and provide a directory name.

For example, in Windows: > mps-dashboard.bat setup -C D:\mps\dashboard

For example, in Linux: \$./mps-dashboard.sh setup -C /opt/mps/dashboard

Note For a complete list of options that can be passed to the mps-dashboard script, pass a ? as an option to the mps-dashboard script.

For example, in Windows type:

> mps-dashboard.bat ?

In Linux, type:

\$./mps-dashboard.sh ?

The complete list of options are:

setup | start | stop | remove | reset admin password

Note Windows only: If your setup fails when using the command > mps-dashboard.bat setup, verify that your system has Visual C++ Redistributable Packages for Visual Studio[®] 2013 installed.

You can also fix this issue by appending your system path with \$MPS_R00T/bin/win64 where \$MPS_R00T is the directory where MATLAB Production Server is installed.

3 Execute the mps-dashboard script with the start option to start the dashboard.

Platform	Script to Start Dashboard
Windows (Administrato r)	> mps-dashboard.bat start
Linux	\$./mps-dashboard.sh start

You will get a message indicating the host and port where the dashboard is running. The default host and port are localhost and 9090, respectively.

Tip Windows only: To run the dashboard instance as a background process in Windows, precede the mps-dashboard script with command start /B.

For example: > start /B mps-dashboard.bat start

Note You can change the default port used by dashboard by editing the -node_server_port option in config.txt file. You can find the config.txt file
here:

Platform	Location of config.txt File
Windows	<pre>C:\Program Files\MATLAB\MATLAB Production Server \R2018b\dashboard\config\config.txt</pre>
Linux	/usr/local/MATLAB/MATLAB_Production_Server/R2018b/dashboard/config/config.txt

Other customizations to the setup process can be made by editing relevant parts of the config.txt file.

Open a web browser, and type the host and port number that were displayed in the previous step.

For example:

http://localhost:9090

Log In to the Dashboard

To log in to MATLAB Production Server Dashboard follow this procedure:

1 Open a web browser, and type the host and port number that were displayed at the end of the install process.

For example:

http://localhost:9090

2 Type the following information at the login screen for the username and password:

Username: admin

Password: admin

You are now logged into the MATLAB Production Server Dashboard.

Reset the Admin Password

You can use the mps-dashboard script with the option reset_admin_password to change the admin password.

Platform	Script to Reset the Admin Password
	> mps-dashboard.bat reset_admin_password
(Administrator	
)	
Linux	<pre>\$./mps-dashboard.sh reset_admin_password</pre>

Warning The reset_admin_password option should not be executed while dashboard is still running. First, stop dashboard execution using the mps-dashboard script with the stop option and then reset the admin password.

See Also

Related Examples

• "Remove MATLAB Production Server Dashboard" on page 6-7

Remove MATLAB Production Server Dashboard

To remove MATLAB Production Server Dashboard:

1 Open a Terminal or Command Window, and navigate to the dashboard folder in the MATLAB Production Server installation directory.

Platform	Default Directory Where MATLAB Production Server Dashboard is Installed
	<pre>C:\Program Files\MATLAB\MATLAB Production Server \R2017b\dashboard</pre>
Linux	/usr/local/MATLAB/MATLAB_Production_Server/R2017b/dashboard

2 Execute the mps-dashboard script with the stop option.

Platform	Script to Stop Dashboard
Windows (Administrato r)	> mps-dashboard.bat stop
Linux	\$./mps-dashboard.sh stop

Note You need to complete this step only if dashboard is running.

3 Execute the mps-dashboard script with the remove option.

Platform	Script to Remove Dashboard
Windows (Administrato r)	> mps-dashboard.bat remove
Linux	\$./mps-dashboard.sh remove

You receive a message acknowledging that dashboard was successfully removed.

Note Attempting to remove the dashboard while it is still running will result in an error.

The procedure will remove the following directories and files from the directory where dashboard was set up:

```
data
mps_workspace
.pid
```

If you run into any issues while removing dashboard, manually delete the .pid file and re-run the mps-dashboard script with the remove option.

Note In Linux, if you started the dashboard using the & control operator, you don't need to open a new Terminal. The & control operator makes command run in the background.

In Windows, if dashboard is running, you will not have access to the command prompt. Therefore, you need to open a new Command Window to stop any running dashboard instances.

Note Removing dashboard does not uninstall it from the system. It removes the instance that was set up. The dashboard remains installed as part of MATLAB Production Server. If you want to set up the dashboard again, use the mps-dashboard script with the setup option.

See Also

Related Examples

"Set Up and Log In to MATLAB Production Server Dashboard" on page 6-2

Commands — Alphabetical List

mps-check

Test and diagnose a MATLAB Production Server instance for problems

Syntax

mps-check [--timeout seconds] host:port

Description

mps-check sends a request to a MATLAB Production Server instance and receives a status report that is used to identify issues that cause the product to run less than optimally.

Information reported by mps-check to stdout include:

- Status of the server instance
- Port the HTTP interface is listening on
- · Deployed archives for a server instance

Before using mps-check, you must deploy mcrroot/bin/arch/mps_check.ctf to the server instance.

- mcrroot is the path to the MATLAB Runtime installation folder.
- arch is standard abbreviation for the system's operating system and hardware architecture.

Input Arguments

- --timeout seconds The time, in seconds, to wait for a response from the server before timing out. The default is two minutes.
- *host* The host name of the machine running the server instance.
- ullet port The port number on which the server instance listens for requests.

Examples

Display diagnostic information for the server instance running on port 9910 of the local computer.

mps-check localhost:9910

Connecting to localhost:9910
Connected
Sending HTTP request
HTTP request sent
HTTP response received
MPS status check completed successfully

Definitions

Server Instance

Server instance is an instance of the MATLAB Production Server. The files contained in the folder created by mps-new, defined by path/, comprise one configuration of the MATLAB Production Server product.

mps-license-reset

Force a server instance to immediately attempt license checkout

Syntax

mps-license-reset [-C path/]server name

Description

mps-license-reset [-C path/]server_name triggers the server to checkout a license immediately, regardless of the current license status. License keys that are currently checked out are checked in first.

Input Arguments

-C path/

Specify a path to the server instance. If this option is omitted, the current working folder and its parents are searched to find the server instance.

server_name

Server checking out license

Examples

Create a new server instance and display the status of each folder in the file hierarchy, as the server instance is created:

```
mps-license-reset -C /tmp/server_2
```

See Also

mps-status

Topics

"Force a License Checkout Using mps-license-reset" on page 2-4

mps-new

Create a server instance

Syntax

```
mps-new [path/]server_name [-v] [--service] [--service-name name]
[--service-description description] [--service-user user] [--
service-password password] [--noprompt]
```

Description

mps-new [path/]server_name [-v] [--service] [--service-name name] [--service-description description] [--service-user user] [--service-password password] [--noprompt] makes a new folder at path and populates it with the default folder hierarchy for a server instance.

Input Arguments

path

Path to server instance.

server_name

Name of the server instance to create.

If you are creating a server instance in the current working folder, you do not need to specify a full path; specify only the server name.

-v

Display the status of each folder in the file hierarchy created to form a server instance

--service

On Windows, register the server instance as a Windows service.

The Windows service default settings are:

- Service Display Name: MATLAB Production Server path\server name
- Service Description: MATLAB Production Server running instance path\server name
- Service User: LocalSystem

The Windows service is configured to start when the machine starts, not at creation of the service. After you have made configuration changes, start the server instance using mps-start.

--service-name name

Display name for the Windows service associated with the server instance

--service-description description

Informational statement describing the Windows service associated with the server instance

--service-user user

Windows account under which the service associated with the server instance should run. The user account must have read, write, and, delete permissions for the instance directory as well read and execute permissions for the MATLAB Production Server installation directory.

--service-password password

Password for the service user account

--noprompt

Indicates that no prompts are generated

Examples

Create a Server Instance

Create a new server instance, and display the status of each folder in the file hierarchy, as the server instance is created:

```
mps-new /tmp/server_1 -v
server_1/.mps-version...ok
server_1/config/...ok
server_1/config/main_config...ok
server_1/endpoint/...ok
server_1/auto_deploy/...ok
server_1/.mps-socket/...ok
server_1/log/...ok
server_1/log/...ok
```

Create a Windows Service

Create a new server instance, and register it as a Windows service:

```
mps-new /tmp/server_1 --service
```

Tips

- Before creating a server instance, ensure that no file or folder with the specified *path* currently exists on your system.
- After issuing mps-new, issue mps-start to start the server instance.

See Also

```
mps-start | mps-status
```

Topics

```
"Create a Server" on page 1-5
```

[&]quot;Install a Server Instance as a Windows Service" on page 1-18

[&]quot;Server Overview" on page 1-2

mps-profile

Turn profiling on or off

Syntax

```
mps-profile [-C [path/]instance_name] {on|off} [object...]
```

Description

mps-profile turns profiling on or off for specified objects.

Input Arguments

- -C Specify a path to the server instance. If this option is omitted, the current working folder and its parents are searched to find the server instance.
- on Activate profiling.
- off Deactivate profiling.
- ullet object The list of objects whose profiling behavior is changed.

Valid object values are:

- requests
- worker_pool

If no object is specified the command changes all objects.

Examples

Turn profiling on.

mps-profile on

Turn request profiling on without turning on worker pool profiling.

mps-profile on requests

mps-restart

Stop and start a server instance

Syntax

```
mps-restart [-C [path/]server name] [-f]
```

Description

mps-restart [-C [path/]server_name] [-f] stops a server instance, then restarts the same server instance. Issuing mps-restart is equivalent to issuing the mps-stop and mps-start commands in succession.

Input Arguments

-C path/

Specify a path to the server instance. If this option is omitted, the current working folder and its parents are searched to find the server instance. If you are restarting a server instance in the current working folder, you do not need to specify a full path. Only specify the server name.

server_name

Name of the server to be restarted.

-f

Force success even if the server instance is stopped. Restarting a stopped instance returns an error.

Examples

Restart a server instance named server_1, located in folder tmp. Force successful completion of mps-restart.

```
mps-restart -f -C /tmp/server_1
```

Tips

- After issuing mps-restart, issue the mps-status command to verify the server instance has started.
- If you are restarting a server instance in the current working folder, you do not need to specify a full path. Only specify the server name.

See Also

mps-start | mps-status | mps-stop

mps-service

Create or modify a Windows service for a server instance

Syntax

```
mps-service [-C [path/]server_name] create [--name name] [--
description description] [--user user] [--password password] [--
noprompt]

mps-service [-C [path/]server_name] update [--name name] [--
description description] [--user user] [--password password] [--
instance-root new_path] [--noprompt]

mps-service [-C [path/]server_name] delete
mps-service delete service_name [[--force]|[-f]]
mps-service clean [[--force]|[-f]][[--verbose]|[-v]]

mps-service [-C [path/]server_name] undelete

mps-service [-C [path/]server_name]
mps-service list
```

Description

```
mps-service [-C [path/]server_name] create [--name name] [--description description] [--user user] [--password password] [--noprompt] creates a Windows service for the server instance.
```

The Windows service default settings are:

- Service Display Name: MATLAB Production Server path\server_name
- Service Description: MATLAB Production Server running instance $path server_name$
- Service User: LocalSystem

The Windows service is configured to start when the machine starts, not at creation of the service. After you have made configuration changes, start the server instance using mps-start.

mps-service [-C [path/]server_name] update [--name name] [-description description] [--user user] [--password password] [-instance-root new_path] [--noprompt] updates the Windows service entry for the
server instance.

mps-service [-C [path/]server_name] delete deletes the Windows service entry
for the server instance.

mps-service delete service_name [[--force]|[-f]] deletes the Windows
service entry by name.

mps-service clean [[--force]|[-f]][[--verbose]|[-v]] deletes invalid Windows service entries.

Invalid Windows service entries are entries where either the target version of MATLAB Production Server is not present or the associated server instance no longer exists.

mps-service [-C [path/]server_name] undelete restores the deleted Windows
service entry for the server instance.

mps-service [-C [path/]server_name] displays the Windows service entry for the server instance.

mps-service list lists the Windows service entries for all server instances.

Input Arguments

-C path/

Path to server instance

server name

Name of the server instance

--name *name*

Display name for the Windows service associated with the server instance

--description description

Informational statement describing the Windows service associated with the server instance

--user *user*

Windows account under which the service associated with the server instance should run. The user account must have read, write, and, delete permissions for the instance directory as well read and execute permissions for the MATLAB Production Server installation directory.

--password password

Password for the service user account.

--instance-root new_path

Updated path to server instance

--noprompt

Indicate that no prompts are generated

--force, -f

Force deletion without prompting

--verbose, -v

Include details about why the service is not valid.

Examples

Create a Windows Service

Create a default Windows service for the server instance server_1:

```
mps-service -C tmp/server_1 create
```

Delete a Windows Service

Delete the Windows service entry for the server instance server_1:

mps-service -C tmp/server_1 delete

List Existing Windows Services

List the Windows service entries for all the server instances installed on the local machine:

mps-service list

Service Name: MATLAB Production Server {01234567-89ab-cdef-0123-456789abcdef}

Display Name: MATLAB Production Server - My Custom Name

Description: My Description

Instance Root: C:\instances\instance1

MPS Root: C:\Program Files\MATLAB\MATLAB Production Server\R2014b

Status: Started

Service Name: MATLAB Production Server {01234567-89ab-cdef-0123-456789abcdef}

Display Name: MATLAB Production Server - c:\instances\instance2

Description: MATLAB Production Server running instance C:\instances\instance2

Instance Root: C:\instances\instance2

MPS Root: C:\Program Files\MATLAB\MATLAB Production Server\R2015a

Status: Stopped

See Also

mps-new

Topics

"Install a Server Instance as a Windows Service" on page 1-18

Introduced in R2015a

mps-setup

Set up a server environment

Syntax

mps-setup [mcrroot]

Description

mps-setup [mcrroot] sets location of MATLAB Runtime and other start-up options.

The mps-setup command sets the default path to the MATLAB Runtime for all server instances you create with the product. This is equivalent to presetting the --mcr-root option in each server's main_config configuration file.

If a default value already exists in <code>server_name/config/mcrroot</code>, it is updated with the value specified when you run the command line wizard.

Tips

- Run mps-setup from the script folder. Alternatively, add the script folder to your system PATH environment variable to run mps-setup from any folder on your system.
- Run mps-setup without arguments and it will search your system for MATLAB Runtime instances you may want to use with MATLAB Production Server.
- Run mps-setup by passing the path to the MATLAB Runtime as an argument. This method is ideal for non-interactive (silent) installations.

Input Arguments

mcrroot

Specify a path to the MATLAB Runtime if running mps-setup in non-interactive, or silent, mode.

Examples

Run mps-setup non-interactively, by passing in a path to the MATLAB Runtime instance that you want MATLAB Production Server to use.

mps-setup "C:\Program Files\MATLAB\MATLAB Runtime\mcrver"

mcrver is the version of the MATLAB Runtime to use.

See Also

mps-new|mps-start|mps-status

mps-start

Start a server instance

Syntax

```
mps-start [-C [path/]server name] [-f]
```

Description

mps-start [-C [path/]server name] [-f] starts a server instance

Input Arguments

-C path/

Specify a path to the server instance. If this option is omitted, the current working folder and its parents are searched to find the server instance.

server_name

Name of the server to be started.

-f

Force success even if the server instance is currently running. Starting a running server instance is considered an error.

Examples

Start a server instance named $server_1$, located in folder tmp. Force successful completion of mps-start.

```
mps-start -f -C /tmp/server_1
```

Tips

- After issuing mps-start, issue the mps-status command to verify the server instance has STARTED.
- If you are starting a server instance in the current working folder, you do not need to specify a full path. Only specify the server name.

See Also

mps-new|mps-restart|mps-status|mps-stop

Topics

"Start a Server Instance" on page 1-12

"Server Overview" on page 1-2

mps-status

Display status of a server instance

Syntax

```
mps-status [-C [path/]server_name][--statistics|-s
[sample interval]] [--json|-j]
```

Description

mps-status [-C [path/]server_name][--statistics|-s
[sample_interval]] [--json|-j] displays the status of the server (STARTED,
STOPPED), along with a full path to the server instance. Additionally, it can display
performance statistics about the server including:

- sample interval in milliseconds
- · CPU utilization
- number of active worker processes
- number of requests in queue
- memory usage
- request throughput per second
- total queue time in milliseconds

Input Arguments

-C path/

Specify a path to the server instance. If this option is omitted, the current working folder and its parents are searched to find the server instance.

server_name

Server to be queried for status

--statistics [sample_interval], -s [sample_interval]

Specify that statistics are to be collected and displayed.

The optional *sample_interval* allows you to specify the interval, in milliseconds, over which statistics are collected. The default is 500.

Note If you specify a sample interval of 0, only one sample is taken. Two samples are required to compute some statistics such as CPU utilization and throughput.

--json, -j

Specify that statistics are output in JSON format:

```
{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "Instance Status",
    "description": "Status and Statistics for a MATLAB Production
                    Server Instance",
    "type": "object",
    "properties": {
        "instancePath": {
            "description": "Filesystem path for the server
                             instance",
            "type": "string"
        },
        "started": {
            "type": "boolean"
       },
"license": {
            "type": "object",
            "properties": {
                "status": {
                    "enum": [ "CHECKED OUT", "IN GRACE PERIOD",
                               "GRACE PERIOD EXPIRED" ]
                },
                "type": {
                    "enum": [ "INVALID", "UNKNOWN", "COMPILED",
                               "TRIAL", "EDU", "COMM" ]
                "number": {"type": "string"}
            },
```

```
"required": ["status"]
},
"statistics": {
    "type": "object",
    "properties": {
        "sampleIntervalMS": {
            "description": "The difference in upTime
                            between the two samples, 0 if
                            only a single sample was
                            taken",
            "type": "number"
        },
        "localTime": {
            "description": "Local Time at server in format
                            YYYY.MM.DD HH.MM.SS.SSSSSS",
            "type": "string"
        "upTime": {
            "description": "Time since server start in
                            fractional seconds",
            "type": "number"
        },
        "cpuTime": {
            "description": "CPU time consumed by all server
                            processes in fractional
                            seconds",
            "type": "number"
        "cpuPercentage": {
            "description": "CPU utilzation, computed using
                            change in cpuTime and upTime
                            between two samples",
            "type": "number"
        },
        "totalRequestsReceived": {
            "description": "The number of valid requests
                             received",
            "type": "integer"
        "totalRequestsStarted": {"type": "integer"},
        "totalRequestsFailedToStart": {
            "description": "The number of requests that
                            could not be started",
            "type": "integer"
```

```
"totalRequestsFinishedHttpSuccess": {
                    "type": "integer"
                "totalRequestsFinishedHttpError": {
                    "description": "Note: does not includes
                                    requests that failed to start",
                    "type": "integer"
                },
                "memoryWorkingSet": {
                    "description": "Amount of memory resident in
                                    physical memory for all
                                    processes (KiB)",
                    "type": "number"
               "description": "Requests retired per second,
                                    computed using the number of
                                    requests finished or failed to
                                    start over two samples",
                    "type": "number"
                "totalQueueTimeMS": {
                    "description": "Sum of the wait times for
                                    currently queued requests",
                    "type": "number"
                }
           }
        }
    "required": ["instancePath", "started"]
}
```

Examples

Check if a Server is Running

Display status of server instance server_1, residing in tmp folder.

```
mps-status -C /tmp/server_1
```

If server is running and running with a valid license:

```
'/tmp/server_1' STARTED
license checked out
If server is not running:
'/tmp/server 1' STOPPED
```

Report Statistics in a Human Readable Format

Display statistics for the server instance server 1, residing in tmp folder.

```
mps-status -C /tmp/server_1 -s
```

If server is running and running with a valid license:

```
'/tmp/server 1' STARTED
license checked out
Statistics:
Sample Interval (ms):
                          500
CPU Utilization (%):
                          40
Active Worker Processes:
                          2
Requests in Queue:
Memory Usage (KiB):
                          1024
Throughput (requests/s):
                          10
Total Queue Time (ms):
                          100
```

Report Statistics in JSON Format

Display statistics for the server instance server_1, residing in tmp folder.

```
mps-status -C /tmp/server_1 -s -j
If server is running and running with a valid license:
{
    "instancePath":"L:\\MPS\\stats",
    "license":{
        "number":"unknown",
        "status":"CHECKED_OUT",
        "type":"COMM"
    },
    "started":true,
    "statistics":{
        "cpuPercentage":0,
```

```
"cpuTime":1.7628113000000001,
    "localTime":"2015.04.28 16:52:49.874483",
    "memoryWorkingSet":393468,
    "sampleIntervalMS":500.31748899999951,
    "throughput":0,
    "totalQueueTimeMS":0,
    "totalRequestsFailedToStart":0,
    "totalRequestsFinishedHttpError":0,
    "totalRequestsFinishedHttpSuccess":0,
    "totalRequestsReceived":0,
    "totalRequestsStarted":0,
    "upTime":6.9780032949999997
}
```

See Also

mps-restart|mps-start|mps-stop|mps-which

Topics

"Start a Server Instance" on page 1-12
"Server Overview" on page 1-2
"License Server Status Information" on page 4-2

mps-stop

Stop a server instance

Syntax

```
mps-stop [-C [path/]server_name] [-f] [-p | --purge] [-k | --kill]
[-v] [--timeout hh:mm:ss]
```

Description

mps-stop [-C [path/]server_name] [-f] [-p | --purge] [-k | --kill] [-v] [--timeout hh:mm:ss] closes HTTP server socket and all open client connections immediately. All function requests that were executing when the command was issued are allowed to complete before the server shuts down.

Input Arguments

-C path/

Specify a path to the server instance. If this option is omitted, the current working folder and its parents are searched to find the server instance.

server_name

Name of the server to be stopped.

-f

Force success even if the server instance is not currently stopped. Stopping a stopped instance is considered an error.

```
-p | --purge
```

Removes working files in the instance directory. These files are usually removed during a graceful shutdown.

-k | --kill

Immediately and forcibly terminate any running processes for this instance. Use this option if a graceful shutdown has failed.

-v

Displays system messages relating to termination of server instance.

--timeout hh:mm:ss

Set a limit on how long mps-stop will run before returning either success or failure. For example, specifying --timeout 00:02:00 indicates that mps-stop should exit with an error status if the server takes longer than two (2) minutes to shut down. The instance continues to attempt to terminate even if mps-stop times out. If this option is not specified, the default behavior is to wait as long as necessary (infinity) for the instance to stop.

Examples

Stop server instance server_1, located in tmp folder. Force successful completion of mps-stop. Timeout with an error status if mps-stop takes longer than three (3) minutes to complete.

In this example, the verbose (-v) option is specified, which produces an output status message.

```
mps-stop -f -v -C /tmp/server 1 --timeout 00:03:00
```

Example Output

```
waiting for stop... (timeout = 00:03:00)
```

Tips

- After issuing mps-stop, issue the mps-status command to verify the server instance has STOPPED.
- If you are stopping a server instance in the current working folder, you do not need to specify a full path. Only specify the server name.

• Note that the timeout option (--timeout *hh:mm:ss*) is specified with two (2) dashes, not one dash.

See Also

mps-new|mps-restart|mps-start|mps-status

mps-support-info

Display licensing and configuration information of a MATLAB Production Server instance

Syntax

```
mps-support-info [-C [path/]server_name]
```

Description

mps-support-info displays licensing and configuration information of a MATLAB Production Server instance.

Input Arguments

- path The path to where the server instance is installed.
- *server_name* The name of the server instance to locate in the current folder.

Examples

Display licensing and configuration information of server instance fred, residing in / folder.

```
mps-support-info -C /fred
Instance Version:
License Number:
                          UNKNOWN -- MPS stopped
MPS Version:
                          UNKNOWN -- MPS stopped
Available License Number: 857812
Client Version:
                          1.0.1 R2013a
Operating System:
                          Microsoft Windows 7 Enterprise Edition (build 7601), 64-bit
Number of CPU cores:
CPU Info:
                          Intel(R) Xeon(R) CPU
                                                        W3550 @ 3.07GHz 64-bit Compatible
                          11.9915 GB ( 1.2574e+007 KB )
Memory:
```

mps-which

Display path to server instance that is currently using the configured port

Syntax

mps-which [-C [path/]server name]

Description

mps-which [-C [path/]server_name] is useful when running multiple server instances on the same machine. If you attempt to start two server instance on the same port, the latter server instance will fail to start, displaying an address-in-use error. mps-which identifies which server instance is using the port.

Input Arguments

-C path/

Specify a path to the server instance. If this option is omitted, the current working folder and its parents are searched to find the server instance.

server_name

Server to be queried for path.

Examples

server_1 and server_2, both residing in folder tmp, are configured to use to same
port, defined by the http configuration property.

Run mps-which for both servers:

```
mps-which -C /tmp/server_1
```

```
mps-which -C /tmp/server_2
```

Example Output

In both cases, the server that has allocated the configured port displays (server_1):

```
/tmp/server_1
```

Tips

• If you are creating a server instance in the current working folder, you do not need to specify a full path. Only specify the server name.

See Also

mps-status

mps-cache

Control persistence service

Syntax

```
mps-cache [operation] [-C server_path] [--connection
connection_name] [--configFile provider_config_file_path] [--timeout
seconds] [--verbose | -v] [--help |-h]
```

Description

mps-cache [operation] [-C server_path] [--connection
connection_name] [--configFile provider_config_file_path] [--timeout
seconds] [--verbose | -v] [--help |-h] controls the persistence service based
on the specified operation. The supported operations are start, stop, restart, ping,
attach, and detach.

The option <code>connection_name</code> is obtained from the JSON file <code>mps_cache_config</code>. This file must be created by an administrator and placed in the <code>config</code> folder of the server instance. The JSON structure of the <code>mps_cache_config</code> file is:

```
{
    "Connections": {
        "<connection_name>": {
            "Provider": "Redis",
            "Host": "localhost",
            "Port": <port_number>
        }
    }
}
```

<connection_name> and <port_number> are the only fields that can be set by the administrator. Currently, Redis[™] is the only supported persistence service provider. You can have multiple connections to the persistence provider.

Input Arguments

operation

start | stop | restart | ping | attach | detach

- start Start a persistence service.
- stop Stop a persistence service.
- restart Restart a persistence service.
- ping Test whether the persistence service is reachable.
- attach Connect persistence service to server instance process.
- detach Disconnect persistence service from server instance process.

-C server_path

Path to the server instance.

--connection connection_name

Name of connection to persistence service.

--configFile provider_config_file_path

Path to the persistence provider configuration file.

--timeout ss

Set a limit on how long mps-cache will run before returning either success or failure. The default duration is 30 seconds. For example, specifying --timeout 15 indicates that mps-cache should exit with an error status if it takes longer than 15 seconds to access the service.

--verbose | -v

Displays system messages relating to controlling the persistence service.

--help | -h

Displays options for using the mps-cache command.

Examples

Start a Persistence Service

Start a persistence service on Windows assuming a connection name myConnection has been defined in the file mps_cache_config.

```
mps-cache start -C "h:\server\mps_instance" --connection myRedisConnection
mps-cache ping -C "h:\server\mps_instance" --connection myRedisConnection

Sending ping to Redis on localhost:9710.

Redis service running on localhost:9710.

The corresponding mps_cache_config file for the example is:

{
    "Connections": {
        "myRedisConnection": {
            "Provider": "Redis",
            "Host": "localhost",
            "Port": 9710
        }
    }
}
```

See Also

Topics

"Use a Data Cache to Persist Data"

Configuration Properties— Alphabetical List

access-control-provider

Identity management service provider name

Syntax

--access-control-provider PROVIDER

Description

--access-control-provider PROVIDER enables access control by identity provider.

ssl-allowed-clients and --access-control-provider are incompatible flags, and only one of them can be enabled. If both are enabled, MATLAB Production Server fails to start.

Parameters

PROVIDER specifies the identity provider that is used by the MATLAB Production Server instance for access control. Supported values for PROVIDER include: AzureAD.

Examples

Enable Access Control Using Azure Active Directory

--access-control-provider AzureAD

See Also

access-control-config | access-control-policy

access-control-config

Path to the identity management service provider configuration file

Syntax

--access-control-config PATH

Description

--access-control-config PATH specifies the path to the identity provider specific configuration file. This syntax is optional. The default path for AzureAD is ./config/azure_ad.json. If access control is enabled by specifying access-control-provider, the access control configuration file must exist in PATH, otherwise MATLAB Production Server fails to start.

Parameters

PATH specifies the path to access the configuration file.

Examples

Specify Path to AzureAD.

--access-control-config ./config/azure_ad.json

See Also

access-control-policy | access-control-provider

Topics

"Access Control Configuration File" on page 3-9

Introduced in R2018b

access-control-policy

Path to the access control policy file

Syntax

--access-control-policy PATH

Description

--access-control-policy PATH specifies the path to the access control policy file. This syntax is optional. The default path is ./config/ac_policy.json. If access control is enabled by specifying access-control-provider, the access control policy file must exist in PATH, otherwise MATLAB Production Server fails to start.

Once the server has started, the policy file is scanned every five seconds for changes. If the policy file is deleted or contains errors, the server continues to run, but all requests are denied. An error message is written to the main.log file.

Parameters

PATH specifies the path to access the policy file.

Examples

Specify Path to the JSON Access Control Policy File.

--access-control-policy ./config/ac_policy.json

See Also

access-control-config | access-control-provider

Topics

"Access Control Policy File" on page 3-10

Introduced in R2018b

auto-deploy-root

Folder the server instance scans for deployable archives

Syntax

--auto-deploy-root path

Description

--auto-deploy-root path specifies the folder the server instance scans for deployable archives. Deployable archives placed in this folder are automatically unpacked and deployed when the instance is started. No restart is necessary when a deployable archive is added, updated, or removed. Many instances may share a single auto-deploy-root. Using this folder allows near-simultaneous hot deployment to multiple instances. The folder is scanned every five seconds for changes.

Parameters

path

Path to the folder scanned for deployable archives relative to the server instance's root folder.

Examples

Scan the auto_deploy folder for deployable archives to hot deploy.

```
--auto-deploy-root ./auto_deploy
```

cors-allowed-origins

Specify the domain origins from which clients are allowed to make requests to the server

Syntax

```
--cors-allowed-origins [ LIST | * ]
```

Description

cors-allowed-origins specifies the set of domains origins from which clients are allowed to make requests to a MATLAB Production Server instance. Cross-Origin Resource Sharing or CORS defines a way in which client-side web applications and a server can interact to safely determine whether or not to allow a cross-origin request. Most clients such as browsers use the XMLHttpRequest object to make a cross-domain request. This is especially true for client code written using JavaScript®. For MATLAB Production Server to support such requests cors-allowed-origins must be enabled on the server.

Parameters

*

Requests from any domain origin are allowed access to the sever.

LIST

Requests from a list of comma-separated domain origins are allowed access to the server.

Examples

Requests from any domain origin are allowed access to the sever.

```
--cors-allowed-origins *
```

Requests from a specific list of domain origins are allowed access to the server.

--cors-allowed-origins http://www.w3.org, https://www.apache.org

See Also

http

disable-control-c

Disable keyboard interruptions for server instance

Syntax

--disbable-control-c

Description

disable-control-c disables keyboard interruption for the server instance. The server instance does not respond to CTRL-C.

Examples

Disable the **CTRL-C** button.

--disable-control-c

endpoint-root

Folder used to store server named endpoints

Syntax

--endpoint-root path

Description

- --endpoint-root *path* specifies the location for storing server named endpoints. Each interface used to communicate with the outside world generates an endpoint file in this folder. Normally that means:
- http The HTTP function execution interface.
- control The local control interface used by the scripting commands.

These files contain the host:post portion of the URL used to communicate with the named service.

Note While modifying this location is allowed, each instance must have a unique endpoint directory; otherwise behavior is undefined.

Parameters

path

Path to the folder used to store endpoint files relative to the server instance's root folder.

Examples

Store endpoint files in the endpt folder.

--endpoint-root ./endpt

extract-root

Root folder used to store contents of deployed archives

Syntax

--extract-root path

Description

--extract-root *path* specifies the root folder used to store the expanded contents of the deployable archives deployed on the server instance. Deployable archives are unpacked to a hidden subdirectory of extract-root.

Parameters

path

Path to the root folder used to store contents of deployable archives relative to the server instance's root folder.

Examples

Extract deployable archives into the archives folder.

--extract-root ./archives

hide-matlab-error-stack

Hide the MATLAB stack from the clients

Syntax

--hide-matlab-error-stack

Description

hide-matlab-error-stack controls whether the MATLAB stack is exposed to the client. The stack can be sent to the client during development and debug phase, but can be turned off in production.

Examples

Do not transmit the error stack to clients.

--hide-matlab-error-stack

http

URL that server instance uses for insecure connections

Syntax

--http host:port

Description

http specifies the interface port and optional address or host name.

Parameters

host

Host name, or IP address, of the machine running the server instance. If not specified, the server binds to any available interface.

port

Port number the server instance uses to accept connections. $\boldsymbol{\theta}$ specifies bind to any available port.

Examples

Restrict access to the HTTP interface to local clients only, port 9910.

```
--http localhost:9910
```

Bind to any free port. The bound address is written to \$INSTANCE/endpoint/https.

--http 0

Bind to a specific IP address and port.

--http 234.27.101.3:9920

Bind to a specific host name on any free port

--http my.hostname.com:0

http-linger-threshold

Amount of data the server instance discards after an HTTP error and before the server instance closes the TCP connection

Syntax

--http-linger-threshold size

Description

http-linger-threshold sets the amount of data a server instance reads after an error. If an HTTP request is rejected and the server instance sends back an HTTP error response such as HTTP 404/413, the server instance does not close the TCP connection immediately. Instead it waits for the client to shut down the TCP connection. This ensures that the client receives the HTTP error response sent by the server instance. During this time, the server instance receives, and discards, data from the client, until the amount of data received equals http-linger-threshold. After that, the server instance resets the TCP connection.

By default, the threshold is unlimited and the server instance waits to receive the whole HTTP request.

Parameters

size

Amount of data received before the TCP connection is reset.

Examples

Set the linger threshold to be 64 MB.

--http-linger-threshold 64MB

Set the linger threshold to be 32 KB.

--http-linger-threshold 32KB

Set the linger threshold to be 1024 B.

--http-linger-threshold 1024

https

URL that server instance uses for secure connections

Syntax

--https host:port

Description

https specifies the interface port and optional address or host name.

Parameters

host

Host name, or IP address, of the machine running the server instance. If not specified, the server binds to any available interface.

port

Port number the server instance uses to accept connections. $\boldsymbol{\theta}$ specifies bind to any available port.

Examples

Restrict access to the HTTP interface to local clients only, port 9920.

```
--https localhost:9920
```

Bind to any free port. The bound address is written to \$INSTANCE/endpoint/https.

```
--https 0
```

Bind to a specific IP address and port.

```
--https 234.27.101.3:9920
```

Bind to a specific host name on any free port

--https my.hostname.com:0

license

Locations searched for valid licenses

Syntax

--license pathList

Description

license specifies the license servers or the license files used by the server instance. You can specify multiple license sources with this option.

If this option is not specified, the server searches in the default locations for the license files.

Parameters

pathList

Path to one or more license servers or license files. Multiple entries are separated by the appropriate path separator for the platform.

Examples

A Unix server looks for licenses using a license server hosted on port 27000 of hostA and in /opt/license/license.dat.

```
--license 27000@hostA
--license /opt/license/license.dat
```

The same configuration in one line.

--license 27000@hostA:/opt/license/license.dat

A Windows server looks for licenses using a license server hosted on port 27000 of hostA and in c:\license\license.dat.

- --license 27000@hostA
- --license c:\license\license.dat

The same configuration in one line.

--license 27000@hostA;c:\license\license.dat

license-grace-period

Maximum length of time the server instance responds to HTTP requests after license server heartbeat has been lost

Syntax

--license-grace-period hr:min:sec.fractSec

Description

license-grace-period specifies the grace period, which starts at the first heartbeat loss event. Once the grace period expires, the server instance rejects any new incoming HTTP requests.

The default grace period is 2 hours 30 minutes. The maximum value is 2 hours 30 minutes. The minimum value is 10 minutes.

Parameters

hr

Hours in interval.

min

Minutes in interval.

sec

Seconds in interval.

fractSec

Fractional seconds in interval.

Examples

The grace period lasts for 1 hour, 29 minutes, 5 seconds.

--license-grace-period 1:29:05

The grace period lasts for 10 minutes and 250 ms.

--license-grace-period 00:10:00.25

license-poll-interval

Interval of time before license server is polled to verify and check out a valid license after the grace period expires

Syntax

--license-poll-interval hr:min:sec.fractSec

Description

license-poll-interval specifies interval at which the server instance polls the license server after the license server has timed out or after the grace period has expired.

The default poll interval is 10 minutes. The minimum value is 10 minutes.

Parameters

hr

Hours in interval.

min

Minutes in interval.

sec

Seconds in interval.

fractSec

Fractional seconds in interval.

Examples

Poll for licenses at intervals of 1 hour, 29 minutes, 5 seconds.

```
--license-poll-interval 1:29:05
```

Poll for licenses at intervals of 10 minutes and 250 ms.

--license-poll-interval 00:10:00.25

log-archive-max-size

Maximum size of the log archive folder

Syntax

--log-archive-max-size size

Description

log-archive-max-size specifies the maximum size to which the log archive folder can grow before old log files are deleted.

If this property is not specified, then the log archive grows without limit.

Parameters

size

Size, in bytes, of the archive folder.

Examples

Reap log archives when they reach 5 MB.

--log-archive-max-size 5MB

log-archive-root

Path to the folder containing archived log files

Syntax

--log-archive-root path

Description

--log-archive-root path specifies the path to directory that stores rotated log files.

Note If you omit this property, rotated logs remain in the log root directory, which grows unbounded as logs are rotated.

Parameters

path

Path to the folder where log files are archived relative to the server instance's root folder.

Examples

Archive logs to server_root/old_logs.

--log-archive-root ./old_logs

log-handler

Add custom log handler

Syntax

--log-handler format command

Description

--log-handler *format command* adds a log handler that writes log data to the application specified by *command* in the format specified by *format*.

The server instance launches an instance of the log handler at startup. All log events are sent to the STDIN stream of the log handler. The STDOUT and STDERR streams of the log handler are captured and written to <code>INSTANCE_ROOT/log/custom_logger_N.out</code> and <code>INSTANCE_ROOT/log/custom_logger_N.err</code>.

Parameters

format

Format used to write log events. Valid values are:

- text/plain
- text/json
- text/xml

command

Application launched to process log events.

Examples

Send log events to a custom JSON parser that prepares performance graphs.

--log-handler text/json perf_grapher

log-root

Path to the log file folder

Syntax

--log-root path

Description

--log-root path specifies the location for log files.

When a server instance starts, the following log files are created:

- main__DATE__SERIAL.log The head process main log
- main.log A link to the mostly recently written main log file
- ullet main.out Captured standard output from the main process
- $\bullet \quad \text{main.err} \text{Captured standard error output from the main process} \\$

When the server instance stops, the head process main log is moved to the log archive folder.

Note Omitting this property disables all logging except for stdout and stderr capture of main.

Parameters

path

Path to the folder where log files are stored relative to the root folder of the server instance.

Examples

Archive logs to $server_root/logs$.

--log-root ./logs

log-rotation-size

Size at which the log is archived

Syntax

--log-rotation-size size

Description

log-rotation-size specifies the maximum size to which the log can grow before it is rotated into the archive area. If specified as less than 1 MB, a warning is issued and the effective size is increased to 1 MB.

No entry signifies that logs are never archived.

Parameters

size

Size, in bytes, of the log file.

Examples

Rotate logs when they reach 5 MB.

--log-rotation-size 5MB

log-severity

Severity at which messages are logged

Syntax

--log-severity level

Description

log-severity specifies the level of detail at which to add information to the main log.

Parameters

level

Severity threshold at which messages are logged. Valid values are:

- error Notification of problems or unexpected results.
- warning Events that could lead to problems if not addressed.
- information High-level information about major server events.
- trace Detailed information about the internal state of the server.

The levels are cumulative; specifying information implies warning and error.

Examples

Enable all log messages.

--log-severity trace

mcr-root

Location of a MATLAB Runtime installation

Syntax

--mcr-root path

Description

mcr-root specifies the location of an installed MATLAB Runtime instance. If multiple MATLAB Runtime installations are available, then specify each installation on a separate line.

Note Specifying multiple MATLAB Runtime installations allows one MATLAB Production Server instance to support multiple versions of the MATLAB Runtime. Specifying multiple MATLAB Runtime installations of the same version has no effect on performance.

If multiple mcr-root settings are present, then the server uses dynamic worker pool management, where worker processes are started in response to demand and shut down in response to system resource utilization.

The server instance scans the list of provided MATLAB Runtime installations in order from first to last and chooses the first MATLAB Runtime installation capable of processing the request. A MATLAB Runtime installation can process a request if it is compatible with the deployable archive containing the function being evaluated.

Note

- A server instance should only be configured to use MATLAB Runtime roots on a local file system. Otherwise, a network partition may cause worker processes to fail.
- All values for mcr-root must be for the same OS/hardware combination.

Parameters

path

Path to the root folder of the MATLAB Runtime installation.

Note The special value mCRuNsETtOKEN indicates to the mps-start command that there is no MATLAB Runtime installation configured for this instance. Running the mps-start command results in an error.

Examples

Use the v80 version of the MATLAB Runtime.

```
--mcr-root /usr/local/MCR/v80
```

Use the v80 and v81 versions of the MATLAB Runtime.

```
--mcr-root /usr/local/MCR/v80
--mcr-root /usr/local/MCR/v81
```

See Also

Topics

"Specify the MATLAB Runtime for a Server Instance" on page 1-11 $\,$

[&]quot;Support Multiple MATLAB Versions" on page 1-14

num-threads

Number of request-processing threads within the server instance

Syntax

--num-threads count

Description

num-threads sets the size of the thread pool available to process requests. Server instances do not allocate a unique thread to each client connection. Rather, when data is available on a connection, the required processing is scheduled on the pool of threads in the server main process.

The threads in this pool do not directly evaluate MATLAB functions. There is a single thread within each worker process that executes MATLAB code on behalf of the client.

Set this parameter to 1, and increase it only if the expected load consists of a high volume of short-running requests. This strategy ensures that the available processor resources are balanced between MATLAB function evaluation and processing client-server requests. There is usually no benefit to increasing this parameter to more than the number of available cores.

Parameters

count

Number of threads available in the thread pool.

This value must be one or greater.

Examples

Create a pool of 10 threads for processing requests.

--num-threads 10

num-workers

Maximum number of workers allowed to process work simultaneously

Syntax

--num-workers count

Description

num-workers defines the number of concurrent MATLAB execution requests that can be processed simultaneously. It should correspond to the number of hardware threads available on the local host.

If you specify a single value for the mcr-root property, this setting determines the fixed size of the worker pool.

If you specify more than one value for the mcr-root, this setting specifies a maximum limit on the size of each subpool specific to MATLAB Runtime. There can be more than specified number of worker processes at a time, but at a maximum only the specified number of workers are allowed to be processing a request.

Parameters

count

Number of workers available evaluate functions.

This value must be one or greater.

The maximum value is determined by the number of license keys available for MATLAB Production Server.

Examples

Allow 10 workers to process requests at a time.

--num-workers 10

pid-root

Folder used to store PID files

Syntax

--pid-root path

Description

- --pid-root *path* specifies the folder used to store PID files. PID files record the system-specific process identifiers for all processes associated with the server instance. This includes:
- main.pid The process identifiers of the server's head process.
- worker N.pid The process identifiers of each worker process N.

In some circumstances, worker_2.pid may be present when worker_1.pid is not. This is a strong indication that worker_1 crashed and was restarted automatically. You can confirm this by checking the main log file.

The format of these files is a single decimal integer, the process identifier.

Parameters

path

Path to the folder used to store PID files relative to the server instance's root folder.

Examples

Store PID files in the pid folder.

--pid-root ./pid

profile

Turn profiling on or off

Syntax

--profile state object

Description

profile turns profiling on or off for different objects.

Note Activating profiling has a negative impact on performance.

In some circumstances, worker_2.pid may be present when worker_1.pid is not. This is a strong indication that worker_1 stopped and was restarted automatically. You can confirm this by checking the main log file.

When profiling is activated, messages similar to the following are included in the log.

```
12 [2014.02.27 10:13:28.075126] [profile] [SERVICE:http-connection] [endpoint:[::]:9910] [client:163.72.158.2:57611] [request-id:0:1:5] [type:arrive] [component:mymagic] [function:magic] Request arrived and was placed in the queue 13 [2014.02.27 10:13:28.087752] [profile] [SERVICE:http-connection] [endpoint:[::]:9910] [client:163.72.158.2:57611] [request-id:0:1:5] [type:start] [worker:3] Request started executing on worker-3 ...
15 [2014.02.27 10:13:31.397266] [profile] [SERVICE:http-connection] [endpoint:[::]:9910] [client:163.72.158.2:57611] [request-id:0:1:5] [type:finish] [status:200] Request completed with HTTP status 200
```

Parameters

state

Specifies if profiling is active. Valid values are:

- on Activate profiling.
- off Activate profiling.

object

The list of objects to change. Supported objects are:

- requests
- worker_pool

If no object is specified, all objects are changed.

Examples

Turn on request profiling.

--profile on requests

Turn on profiling for all objects.

--profile on

request-size-limit

Set the maximum size of a request

Syntax

```
--request-size-limit size
```

Description

request-size-limit specifies the maximum size of a request specified by *size*. The default request size is 64MB.

Parameters

size

Size, in bytes, of the request.

Examples

Set the request size to 128MB.

```
--request-size-limit 128MB
```

See Also

num-threads

ssl-allowed-client

MATLAB programs a client can access

Syntax

```
--ssl-allowed-client client1,...,clientN:archive1,...,archiveN
```

Description

ssl-allowed-client authorizes clients based on the client certificate common name. Only authorized clients can request the evaluation of MATLAB functions.

If there are no archive names following the common name, the client can access all of the deployed archives. Otherwise, the client can access only the specified archives.

Parameters

client

Common name of the client.

archive

Name of an archive the clients can access.

Examples

Allow client1 and client2 to access magic.ctf and helloworld.ctf. Allow client3 access to all deployed archives.

```
--ssl-allowed-client client1,client2:magic,helloworld
--ssl-allowed-client client3
```

ssl-ciphers

List of cipher suites to use

Syntax

--ssl-ciphers ciphers

Description

ssl-ciphers provides a list of cipher suites the server instance can use.

Parameters

ciphers

Cipher suites the server instance uses for encryption. Valid values are:

- ullet ALL Use all available cipher suites except eNULL.
- $\mbox{\sc HIGH}-\mbox{\sc Use}$ all available high encryption cipher suites.
- ullet list Comma-separated list of cipher suites to use.

All OpenSSL configuration strings can be passed with the ciphers. This provides finer control over the selected cipher.

Examples

Use only high encryption cipher suites.

```
--ssl-ciphers HIGH
```

Disable the use of ADH ciphers.

```
--ssl-ciphers ALL:!ADH
```

Use the strongest available ECDHE ciphers.

--ssl-ciphers ALL:@STRENGTH

Disable the use of ADH ciphers and use the strongest available ECDHE ciphers.

--ssl-ciphers ALL:!ADH@STRENGTH

ssl-protocols

List of allowed SSL protocols

Syntax

--ssl-protocols protocols

Description

ssl-protocols lists the allowed protocols. The default behavior is to attempt to use TLSv1.2. If this property is not set, the server allows all protocols.

Parameters

protocols

Comma-separated list of allowed protocols. Valid entries are:

- TLSv1
- SSLv2
- SSLv3

Examples

Allow only TLSv1.

--ssl-protocols TLSv1

ssl-tmp-ec-param

Elliptical curve used in ECDHE ciphers

Syntax

--ssl-tmp-ec-param elliptic_curve_name

Description

--ssl-tmp-ec-param *elliptic_curve_name* specifies the name of the elliptical curve used in ECDHE ciphers.

If this property is not specified, all ECDHE ciphers will be removed from the list of ciphers available for secure communication.

Parameters

elliptic curve name

Named of curve. All curves supported by OpenSSL are supported.

Examples

Use the prime256v1 curve.

--ssl-tmp-ec-param prime256v1

ssl-tmp-dh-param

File containing a pregenerated ephemeral DH key

Syntax

--ssl-tmp-dh-param path

Description

ssl-tmp-dh-param specifies the path to the pre-generated ephemeral DH key. If this parameter is not provided, the server instance automatically generates the DH key at start-up. Providing a pre-generated DH key can decrease instance start time.

Parameters

path

Path to the pre-generated DH key. Relative and absolute paths are valid.

Examples

The instance loads the DH key from $dh_param.pem$ which is located at $instance_root/x509$.

```
--ssl-tmp-dh-param ./x509/dh param.pem
```

ssl-verify-peer-mode

Level of client verification the server instance requires

Syntax

--ssl-verify-peer-mode mode

Description

ssl-verify-peer-mode specifies if the server requires clients to present a valid certificate to connect. Server instances can allow clients to connect with or without providing a valid certificate. All requests will still require authorization.

Parameters

mode

Mode used to authenticate clients. Valid values are:

- no-verify-peer No peer certificate verification. The client side does not need to provide a certificate.
- verify-peer-require-peer-cert The client must provide a certificate and the certificate will be verified.

The default is no-verify-peer.

Examples

Require clients to provide a certificate.

--ssl-verify-peer-mode verify-peer-require-peer-cert

use-single-comp-thread

Start MATLAB Runtime with a single computational thread

Syntax

--use-single-comp-thread

Description

--use-single-comp-thread specifies that workers start the MATLAB Runtime with a single computational thread.

Examples

Start the MATLAB Runtime with a single computational thread.

--use-single-comp-thread

worker-memory-check-interval

Interval at which workers are polled for memory usage

Syntax

--worker-memory-check-interval hr:min:sec.fractSec

Description

worker-memory-check-interval specifies how often to poll the memory usage of a worker process. This setting affects the behavior of all other settings that act based on worker memory usage such as worker-memory-trigger, worker-memory-target, and worker-restart-memory-limit.

Parameters

hr

Hours in interval.

min

Minutes in interval.

sec

Seconds in interval.

fractSec

Fractional seconds in interval.

Examples

Check memory usage every one and a half minutes.

```
--worker-memory-check-interval 0:01:30
```

See Also

worker-restart-memory-limit | worker-restart-memory-limit-interval

Topics

"Control Worker Restarts" on page 1-16

worker-restart-interval

Time interval at which a server instance stops and restarts its workers

Syntax

--worker-restart-interval hr:min:sec.fractSec

Description

worker-restart-interval specifies the interval at which the server instance stops and restarts its worker processes. If this setting is not given, the workers are not restarted in response to time.

Parameters

hr

Hours in interval.

min

Minutes in interval.

sec

Seconds in interval.

fractSec

Fractional seconds in interval.

Examples

Restart workers at intervals of 1 hour, 29 minutes, 5 seconds.

```
--worker-restart-interval 1:29:05
```

Restart workers at intervals of 10 minutes and 250 ms.

--worker-restart-interval 00:10:00.25

See Also

Topics

"Control Worker Restarts" on page 1-16

worker-restart-memory-limit

Size threshold at which to consider restarting a worker

Syntax

--worker-restart-memory-limit size

Description

worker-restart-memory-limit sets the memory usage limit of a worker process. If a worker's working set size exceeds worker-restart-memory-limit for an interval of time greater than worker-restart-memory-limit-interval, then that worker is restarted.

Parameters

size

Amount of memory used by worker.

Examples

Restart any worker whose working set size exceeds 1 GB for more than 1 hour.

```
--worker-restart-memory-limit 1GB
--worker-restart-memory-limit-interval 1:00:00
```

See Also

worker-memory-check-interval | worker-restart-memory-limit-interval

Topics "Control Worker Restarts" on page 1-16

worker-restart-memory-limit-interval

Interval for which a worker can exceed its memory limit before restart

Syntax

--worker-restart-memory-limit-interval hr:min:sec.fractSec

Description

worker-restart-memory-limit-interval sets the interval for which a worker process can exceed its memory limit before restart. If a worker's working set size exceeds worker-restart-memory-limit for an interval of time greater than worker-restart-memory-limit-interval, then that worker is restarted.

Parameters

hr

Hours in interval.

min

Minutes in interval.

sec

Seconds in interval.

fractSec

Fractional seconds in interval.

Examples

Restart any worker whose working set size exceeds 1 GB for more than 1 hour.

```
--worker-restart-memory-limit 1GB
--worker-restart-memory-limit-interval 1:00:00
```

See Also

worker-memory-check-interval | worker-restart-memory-limit

Topics

"Control Worker Restarts" on page 1-16

x509-ca-file-store

File containing the server certificate authority file

Syntax

--x509-ca-file-store path

Description

x509-ca-file-store specifies the CA file to verify peer certificates. This file contains trusted certificates and certificate revocation lists.

You can also put intermediate certificates into the CA file. An intermediate certificate in the CA file becomes a trusted certificate.

Parameters

path

Path to the certificate CA file store. Relative and absolute paths are valid.

Examples

The instance loads the CA store from ca_file.pem which is located at instance root/x509.

```
--x509-ca-file-store ./x509/ca_file.pem
```

x509-cert-chain

File containing the server certificate chain

Syntax

--x509-cert-chain path

Description

x509-cert-chain specifies the file storing the server certificate chain file. It contains one or more PEM formatted certificates. The chain begins with the server's certificate. The server's certificate is followed by the chain of untrusted certificates. To use the certificate chain file, specify x509-private-key.

Note Trusted certificates should not be put into this file.

Parameters

path

Path to the certificate chain file. Relative and absolute paths are valid.

Examples

The instance loads the CA store from cert_chain.pem which is located at instance_root/x509.

```
--x509-cert-chain ./x509/cert_chain.pem
```

x509-passphrase

File containing the passphrase that decodes the private key

Syntax

--x509-passphrase path

Description

x509-passphrase specifies the path to the file containing the passphrase of the encrypted private-key. This is required if x509-private-key is specified and the private key file is encrypted. Otherwise, the private key fails to load.

Note This file must be owner read-only.

Parameters

path

Path to the passphrase file. Relative and absolute paths are valid.

Examples

The instance loads the passphrase from key_passphrase.pem which is located at instance_root/x509.

--x509-passphrase ./x509/key_passphrase.pem

x509-private-key

File containing the PEM formatted private key

Syntax

--x509-private-key path

Description

x509-private-key specifies the path to the private-key. The key should be in PEM format.

If it is not configured, the server instance does not load the private key and the serverside certificates.

Parameters

path

Path to the PEM formatted private key file. Relative and absolute paths are valid.

Examples

The instance loads the private key from private_key.pem which is located at instance_root/x509.

```
--x509-private-key ./x509/private_key.pem
```

x509-use-crl

Use the certificate revocation list

Syntax

--x509-use-crl

Description

x509-use-crl specifies that the server instance uses the certificate revocation list. By default, instances do not use any certificate revocation lists. In case, the CRLs in the CA store are ignored.

If x509-use-crl is added, the CRLs are loaded and participate in the client certificate verification. If the CRL has expired, the SSL handshake is rejected.

Examples

The instance uses certificate revocation list when authenticating clients.

--x509-use-crl

x509-use-system-store

Use the CA store provided by the system

Syntax

--x509-use-system-store

Description

x509-use-system-store specifies that the server instance uses the system provided CA store. By default, the server uses the file /etc/ssl/certs/ca-certificates.crt as trusted CA store and searches for trusted certificates under the folder /etc/ssl/certs. You can override these locations by setting the environment variables SSL CERT FILE and SSL CERT DIR.

Examples

The instance uses the system CA store.

--x509-use-system-store

request-timeout

Duration after which the request times out and gets deleted after reaching a terminal state

Syntax

--request-timeout hr:min:sec.fractSec

Description

request-timeout specifies the duration after which the request times out upon reaching a terminal state. At this point, the request gets deleted unless a client process has already deleted the request.

Parameters

hr

Hours in interval.

min

Minutes in interval.

sec

Seconds in interval.

fractSec

Fractional seconds in interval.

Examples

Set the request to time-out after 2 hours.

```
--request-timeout 2:00:00
```

See Also

server-memory-threshold

Introduced in R2016b

server-memory-threshold

Size threshold of server process at which action needs to be taken to manage responses

Syntax

--server-memory-threshold SIZE

Description

server-memory-threshold sets the memory size limit of a server process. If a server process's size exceeds SIZE set by server-memory-threshold, then responses need to be either archived or purged by setting server-memory-threshold-overflow-action to archive_responses or purge_responses respectively. If server-memory-threshold is not set, then the responses will be bound to the server process causing the memory footprint of the server process to keep increasing. As a best practice, it is recommended that a client process delete a request after usage in order to prevent the memory of the server process from growing.

Parameters

size

Threshold size of the server process.

Examples

Archive responses if the size of the server process in memory exceeds 500 MB.

```
--server-memory-threshold 500MB
```

--server-memory-threshold-overflow-action archive_responses

Purge responses if the size of the server process in memory exceeds 2 GB.

```
--server-memory-threshold 2GB
```

--server-memory-threshold-overflow-action purge_responses

See Also

server-memory-threshold-overflow-action

server-memory-threshold-overflow-action

Action to be taken when memory size threshold of server process has been breached

Syntax

--server-memory-threshold-overflow-action ACTION

Description

server-memory-threshold-overflow-action acts by either archiving responses or purging them when the size of the server process in memory set by server-memory-threshold has been breached.

Parameters

```
ACTION

archive_responses

purge responses
```

Examples

Archive responses if the size of the server process in memory exceeds 500 MB.

```
--server-memory-threshold 500MB
--server-memory-threshold-overflow-action archive_responses
```

Purge responses if the size of the server process in memory exceeds 2 GB.

```
--server-memory-threshold 2GB
--server-memory-threshold-overflow-action purge_responses
```

See Also

server-memory-threshold

response-archive-root

Path to location where responses are archived

Syntax

--response-archive-rootPATH

Description

response-archive-root shows the location where responses indicated by *PATH* are archived. This option must be set if the server-memory-threshold-overflow-action option was set to 'archive_responses'. The server process needs to have read & write permissions to the *PATH*.

Parameters

PATH

Location specified as a string.

Examples

Set the archive root.

--response-archive-root ./.response_archive

See Also

response-archive-limit

response-archive-limit

Maximum disk space available to the server process for archiving

Syntax

--response-archive-limit SIZE

Description

response-archive-limit specifies the maximum disk space available to the server process for archiving. If the limit set by <code>SIZE</code> is reached, the archives will be deleted in a 'First-In First-Out' order until the space for the server process fall below <code>SIZE</code>. If this limit is not specified, the server process will assume there is no limit to disk usage for archiving.

Parameters

size

Size of the server process.

Examples

Set the size of the archive to be 5GB

--response-archive-limit 5GB

See Also

response-archive-root

Introduced in R2016b

user-data

Associate MATLAB data value with string key

Syntax

--user-data KEY VALUE

Description

user-data associates MATLAB data value with key string. KEY and VALUE are strings. Use the double quotes (") character around strings with spaces. The backslash (\) character is the escape character and is used to insert double quotes or backslash characters: \" \\. The application can retrieve the data value by using getmcruserdata(key).

Parameters

KEY VALUE

MATLAB value to be associated with key.

Examples

Set user data with parallel profile settings.

--user-data ParallelProfile c:\\MPS\\myprofile.settings

Use quotes.

--user-data MyValue "Quoted string with escaped \"quotes\" and \\backslash."

See Also

Introduced in R2016a