

High IP3 Frequency Mixer

HJK-412H+

Level 17 (LO Power +17 dBm) 2400 to 4100 MHz



CASE STYLE: TTT881

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
LO Power	+19 dBm
RF Power	+20 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	2
RF	1
IF	3
GROUND	4,5,6

Features

- high IP3, 25 dBm typ.
- good L-R isolation, 30 dB typ., L-I isolation, 35dB typ.

Applications

- radar
- fixed microwave
- industrial scientific and medical
- broadcast
- amateur radio


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Frequency Range, RF	2400		4100	MHz
Frequency Range, LO	3700	—	5400	MHz
Frequency Range, IF	1200	—	1800	MHz
Conversion Loss	—	10.7	12.2	dB
LO to RF Isolation	17	30	—	dB
LO to IF Isolation	18	35	—	dB
IP3	—	25	—	dBm
RF Input Power at 1 dB Compression	—	+14	—	dBm

Outline Drawing

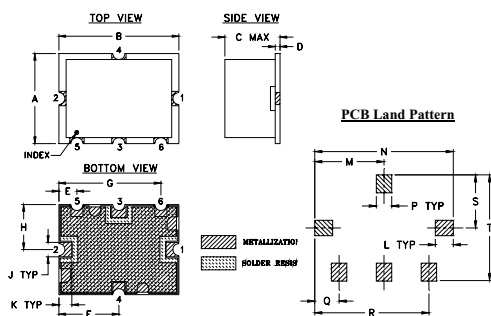


Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

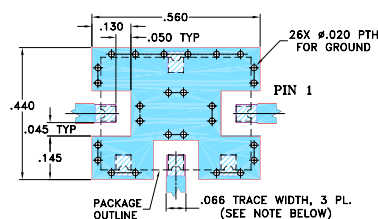

NOTE:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


Notes








- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	IP3 (dBm)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
2356.00	3656.00	9.65	38.75	56.54	2.60	3.52	22.88
2706.00	4006.00	9.60	33.27	33.62	2.50	3.15	24.78
3200.00	4500.00	10.71	30.69	46.10	2.37	2.12	25.51
3700.00	5000.00	10.83	32.59	36.09	1.96	3.01	23.91
3725.00	5025.00	10.73	32.14	36.89	1.94	3.11	23.87
3750.00	5050.00	10.75	32.49	38.21	1.90	3.20	23.77
3775.00	5075.00	10.83	31.84	39.44	1.87	3.28	23.77
3800.00	5100.00	10.72	31.41	40.52	1.85	3.31	23.00
3900.00	5200.00	10.69	32.63	46.33	1.79	3.62	22.80
3950.00	5250.00	10.65	32.25	51.79	1.76	3.75	22.50
4000.00	5300.00	10.65	31.46	41.48	1.76	3.93	22.67
4010.00	5310.00	10.61	31.29	39.75	1.70	3.91	22.70
4050.00	5350.00	10.66	29.95	33.74	1.69	4.05	22.95
4090.00	5390.00	10.67	28.66	31.10	1.67	4.13	22.75
4130.00	5430.00	10.68	27.87	29.00	1.71	4.34	22.72

Electrical Schematic

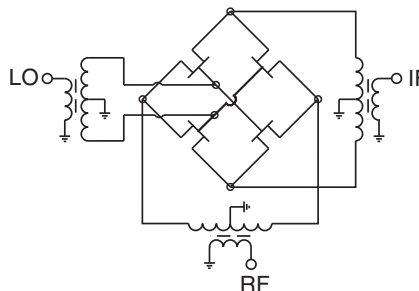

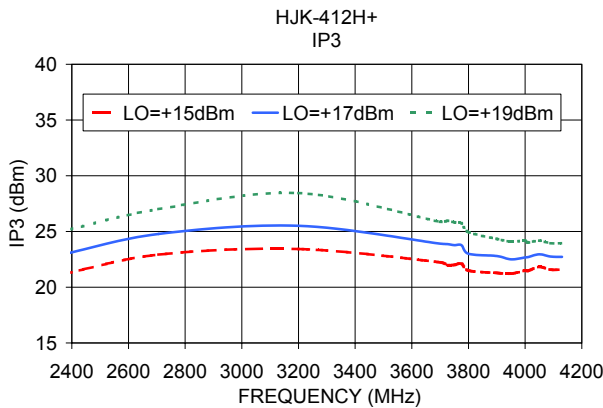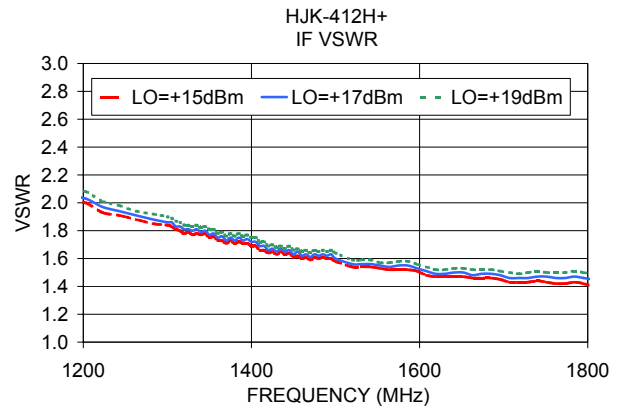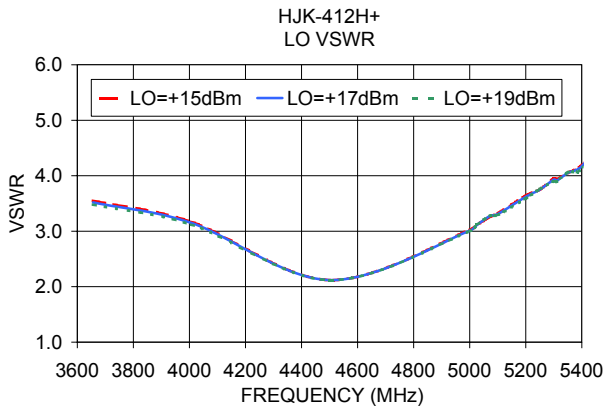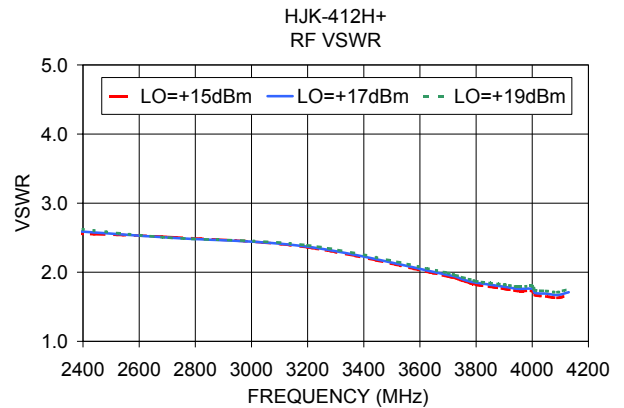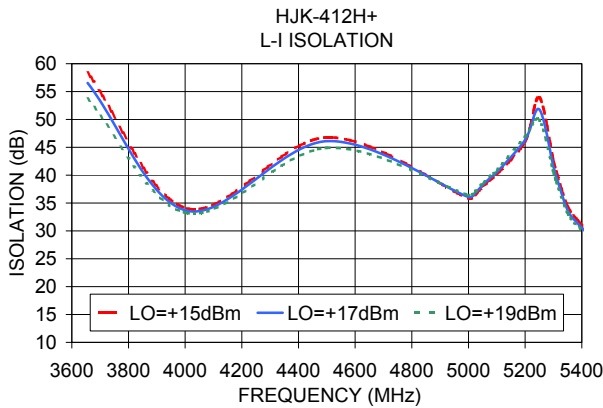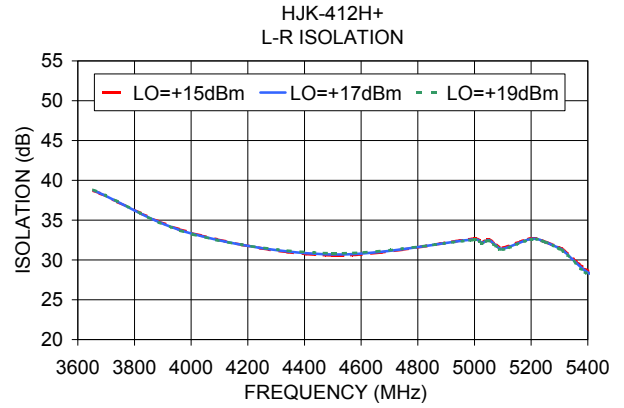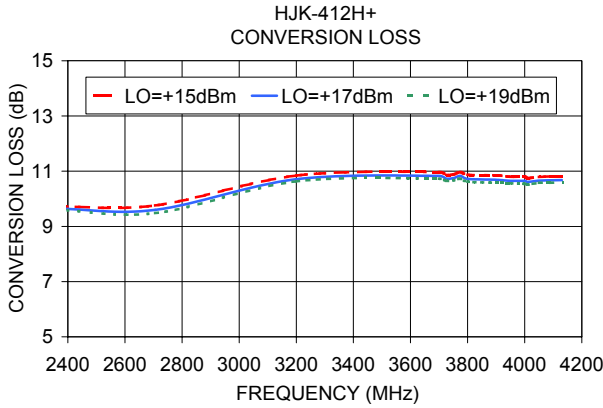

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp