


Up Converter Frequency Mixer

HJK-U151H+

Level 17 (LO Power +17 dBm) 10 to 280 MHz



CASE STYLE: TTT881

Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
LO Power	+19 dBm
IF Power	+19 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	2
IF (IN)	3
RF (OUT)	1
GROUND	4,5,6

Features

- up converter mixer
- high IP3, 28 dBm typ.
- excellent L-R isolation, 55 dB typ;
L-I isolation, 40 dB typ.
- protected by US Patent 6,807,407

Applications

- mobile satellite
- differential GPS
- amateur radio
- aeronautical communications


Electrical Specifications

FREQUENCY (MHz)			CONVERSION LOSS (dB)			LO-IF (IN) ISOLATION (dB)		LO-RF (OUT) ISOLATION (dB)		IP3 at center band (dBm)
IF (IN)	LO	RF (OUT)	Typ.	σ^*	Max.	Typ.	Min.	Typ.	Min.	Typ.
10-130	140-280	70-150	7.6	0.1	9.2	40	30	55	48	28

1 dB COMPR. +17 dBm typ.

* σ is a standard deviation


Outline Drawing

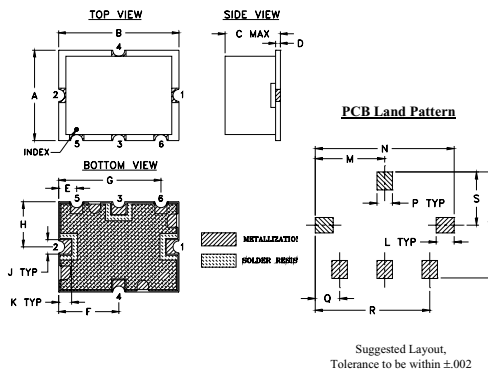

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

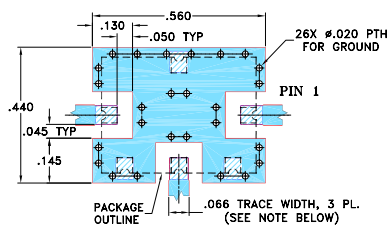


1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" \pm .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. DENOTES PCB COPPER LAYOUT WITH SOLDER (SOLDER

Typical Performance Data

Frequency (MHz)			Conversion Loss (dB)	Isolation L-I (dB)	Isolation L-R (dB)	VSWR LO Port (:1)	IP3 (dBm)	Freq. (MHz)	VSWR RF (OUT) Port (:1)
IF (IN)	LO	RF (OUT)	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
10.10	140.10	130.00	7.72	42.54	55.17	2.34	30.47	70.00	1.98
15.10	146.10	131.00	7.67	42.45	54.87	2.32	30.11	74.00	1.97
20.10	152.10	132.00	7.65	42.26	54.66	2.31	29.50	78.00	1.96
25.10	158.10	133.00	7.65	41.96	54.39	2.31	29.62	82.00	1.95
30.10	164.10	134.00	7.67	41.63	54.02	2.32	31.07	86.00	1.95
35.10	170.10	135.00	7.72	41.21	53.70	2.34	32.74	90.00	1.94
40.10	176.10	136.00	7.75	40.74	53.58	2.37	31.71	94.00	1.94
45.10	182.10	137.00	7.79	40.29	53.70	2.41	29.81	98.00	1.93
50.10	188.10	138.00	7.80	39.99	53.96	2.46	27.61	102.00	1.92
55.10	194.10	139.00	7.80	39.90	54.05	2.52	26.14	106.00	1.92
60.10	200.10	140.00	7.80	40.10	53.73	2.59	28.38	110.00	1.91
65.10	206.10	141.00	7.79	40.43	53.15	2.67	28.84	114.00	1.91
70.10	212.10	142.00	7.75	40.61	52.79	2.76	29.95	118.00	1.91
80.10	224.10	144.00	7.72	40.76	52.57	2.91	28.32	126.00	1.90
85.10	230.10	145.00	7.71	40.73	52.57	2.98	27.67	130.00	1.90
90.10	236.10	146.00	7.74	40.64	52.64	3.02	27.27	134.00	1.90
100.10	247.10	147.00	7.75	40.38	52.74	3.03	26.72	138.00	1.90
110.10	258.10	148.00	7.80	39.93	52.45	3.00	26.55	142.00	1.90
120.10	269.10	149.00	7.83	39.35	51.90	3.00	27.14	146.00	1.90
130.10	280.10	150.00	7.88	38.74	51.55	3.11	27.66	150.00	1.90








Electrical Schematic

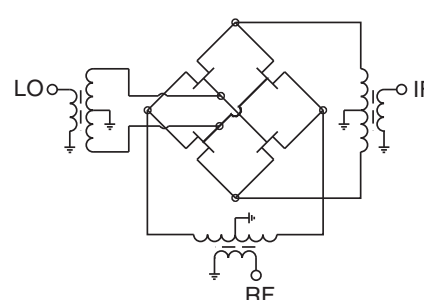

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



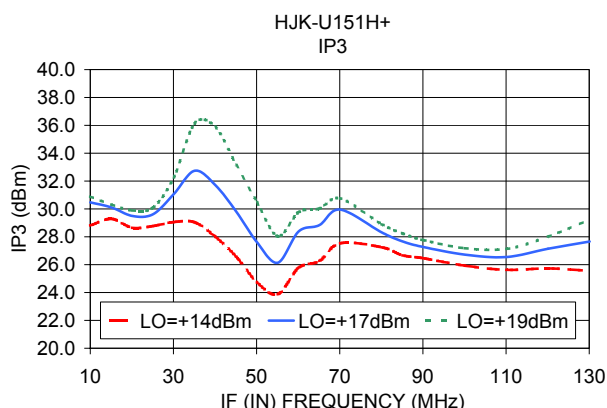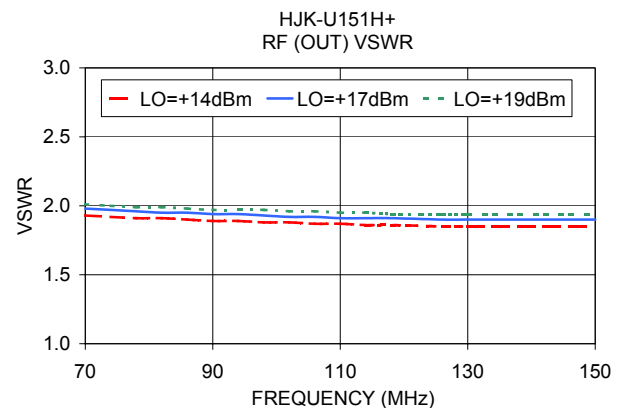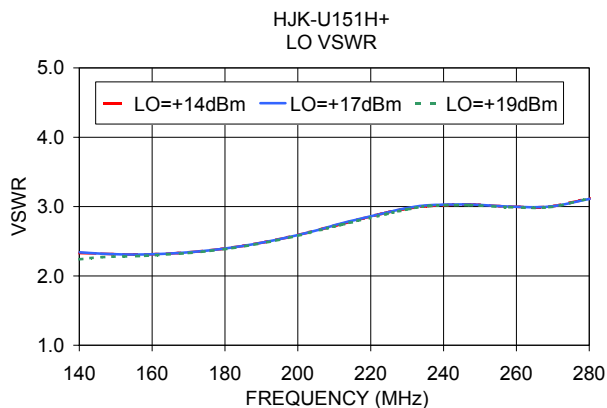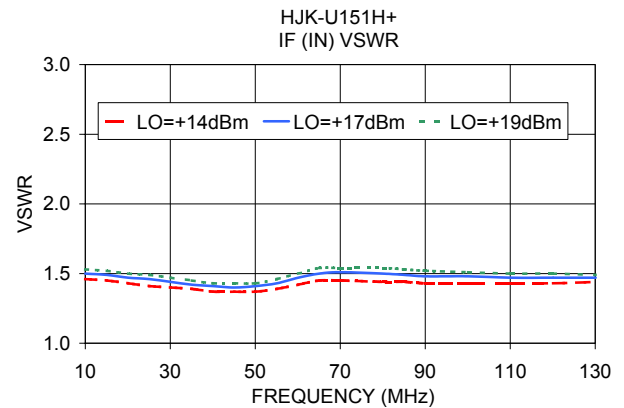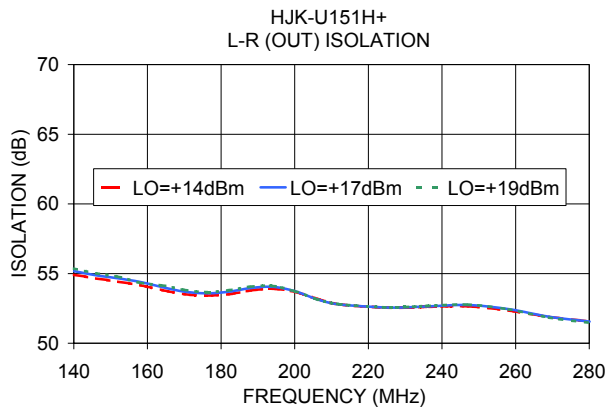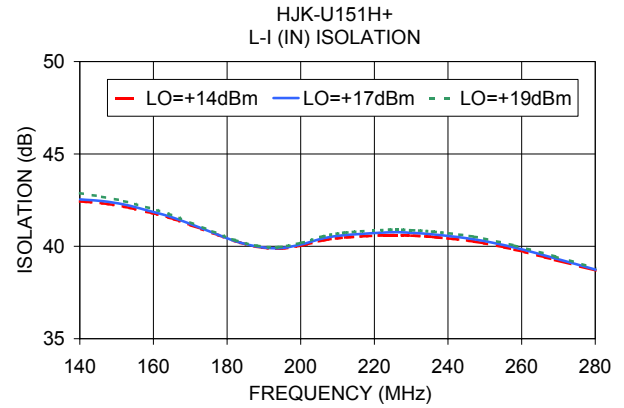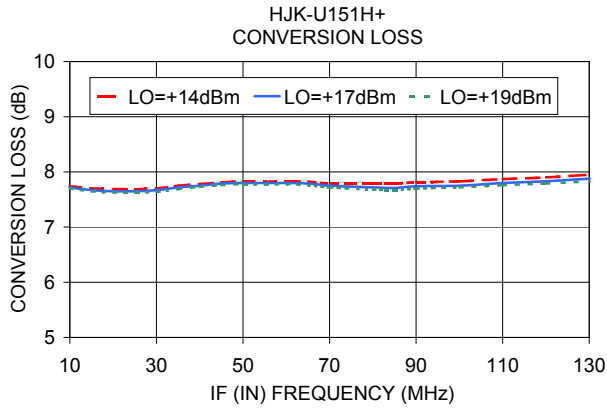

Notes
 A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp