


POWER SPLITTERS/COMBINERS

50&75Ω

12 Way-0° 1 to 1700 MHz

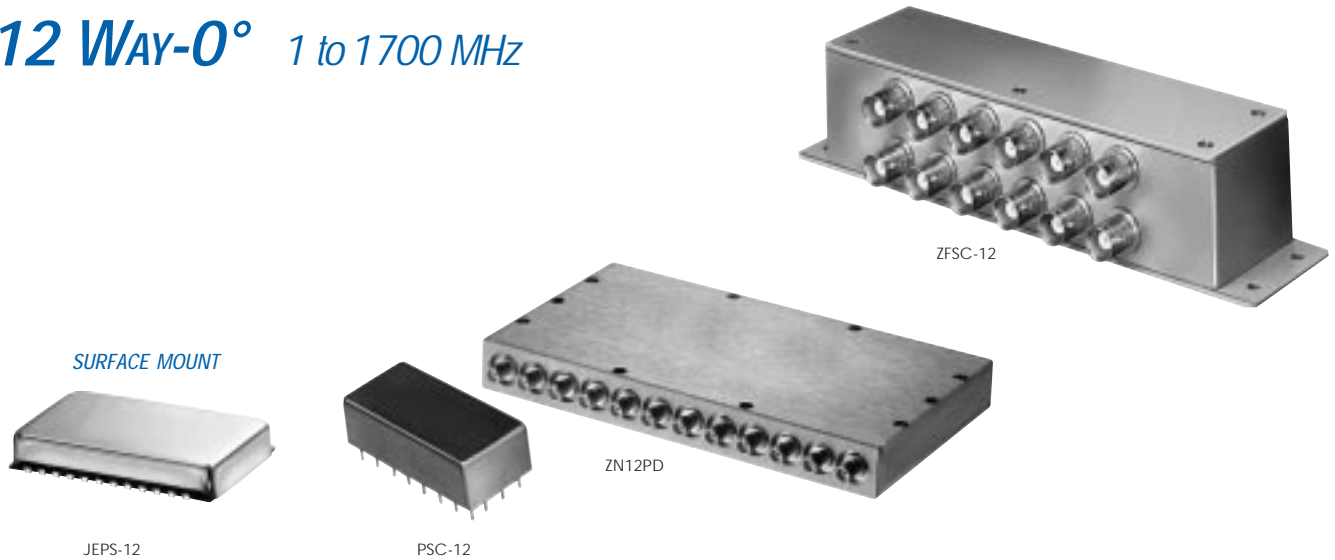

MODEL NO.	FREQ. RANGE MHz f_L - f_U	ISOLATION dB			INSERTION LOSS, dB Above 10.8dB			PHASE UNBALANCE Degrees			AMPLITUDE UNBALANCE dB			CASE STYLE Note B	MOUNTING NO.	PRICE \$ Qty. (1-9)		
		L Typ. Min.	M Typ. Min.	U Typ. Min.	L Typ. Max.	M Typ. Max.	U Typ. Max.	L Max.	M Max.	U Max.	L Max.	M Max.	U Max.					
◆ JEPS-12-10 PSC-12-1	50-1000 1-200	25 16 35 30	— 27	— 20	23 14 21 18	1.6 2.5 0.5 0.8	— 0.8	— 1.2	2.2 4.0 1.0 1.4	10 4	— 8	23 16	0.7 0.2	— 0.4	1.4 0.7	BL372 E10	lx bu	109.95 88.95
ZN12PD-17	800-1700		30	18		0.45	1.2			14			0.7			UU589	—	249.00
ZFSC-12-1	1-200	30 25	35 20	28 20	0.8 1.2	1.1 1.4	1.3 1.6	4 8	16	0.3 0.2	0.3					R67	—	174.95
■ ZFSC-12-1W-75	5-860	33 22	30 20	26 18	0.5 1.2	0.8 2.5	1.6 4.2	2 8	20	0.7 0.8	1.5					R67	—	199.95
ZFSC-12-11	10-300	28 20	33 25	28 20	1.1 1.3	1.1 1.5	1.5 1.8	2 4	6	0.2 0.3	0.4					R67	—	174.95
■ ZFSC-12-1-75	10-200	35 27	—	—	27 20	0.5 0.8	—	—	0.8 1.3	—	—	—	0.25	—	0.4	R67	—	179.95
■ ZFSC-12-175	10-500	23 20	24 20	22 18	0.9 1.2	1.0 1.3	1.2 2.0	—	—	0.4 0.5	0.8					R67	—	197.95

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

NOTES:

- ◆ Aqueous washable
- Non-hermetic
- Denotes 75 Ohm model, for coax connector models 75 Ohm BNC connectors are standard.
- ⊗ When only specification for M range given, specification applies to entire frequency range.
- ⊕ At low range frequency band (f_L to $10 f_L$), linearly derate maximum input power by 13 dB.
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel and MIL description are given in section 0, see "Mini-Circuits Guarantees Quality" article.
- B. Connector types and case mounted options, case finishes are given in section 0, see "Case styles & Outline Drawings".
- C. Prices and specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. Matched power rating,

Model ZC16PD	10 Watt
Model ZN12PD	5 Watt
Model ZC16PD-23	2 Watt
Model JEPS	0.5 Watt
All other models	1 Watt
 - 1b. Internal load dissipation,

Model ZC16PD, ZC16PD-24	2.4 Watt
Model ZN12PD, ZC16PD-23	2 Watt
Model ZC16PD-2185	1.75 Watt
Model ZFSC-12-1W-75	1.5 Watt
Model JEPS	0.275 Watt
All other models	0.87 Watt

NSN GUIDE

MCL NO.
ZFSC-16-1(BNC)

NSN
5820-01-9321

Surface Mount □, Plug-In & Coaxial

16 WAY-0° 10 kHz to 2.6 GHz



MODEL NO.	FREQ. RANGE MHz f_L - f_U	ISOLATION dB			INSERTION LOSS, dB Above 12dB			PHASE UNBAL. Degrees			AMPLITUDE UNBAL. dB			VSWR (:1)		CASE STYLE Note B	CONNECTION	PRICE \$ Qty. (1-9)									
		L	M ^o	U	L	M ^o	U	L	M ^o	U	L	M ^o	U	S	OUT												
		Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Typ. Max.	Typ. Max.										
◆ ■ JEPS-16-1W-75	10-800	32	20	23	15	20	15	1.6	3.5	1.9	3.5	2.2	4.0	10	15	30	0.8	1.2	2.1	1.40	—	1.16	—	BL372	kf	139.95	
■ ZFSC-16-1	0.5-125	30	24	25	18	20	15	1.0	1.2	1.1	1.3	1.2	1.4	1	3	5	0.3	0.2	0.5	see Yoni for			R30	—	172.95		
■ ZFSC-16-1-75	1-150	30	25	30	25	25	20	0.8	1.1	0.7	1.1	1.0	1.3	3	6	10	0.4	0.2	0.4	Performance			R30	—	182.95		
■ ZFSC-16-3	1-30	—	—	45	28	—	—	0.5	0.9	0.5	0.9	0.5	0.9	1	2	3	0.1	0.1	0.1	Data and			R30	—	172.95		
◆ ■ ZFSC-16-675	0.01-25	25	20	40	25	25	20	0.8	1.1	0.4	0.8	1.0	1.6	1	3	5	0.1	0.2	0.4	curves			R30	—	189.95		
◆ ■ ZFSC-16-12	0.1-200	33	20	27	20	26	20	0.6	1.5	0.7	1.0	0.9	1.5	2	6	9	0.4	0.2	0.4				R30	—	189.95		
NEW ZC16PD-24	650-2400			25	14					0.8	2.25				14			0.9			1.20	1.90	1.10	1.50	UU640	—	349.00
ZC16PD-900	800-900			30	20					0.5	1.0							0.5			1.06	1.20	1.06	1.20	UU179	—	295.00
ZC16PD-960	890-960			28	20					0.5	1.0							0.5			1.06	1.30	1.06	1.20	UU179	—	295.00
ZC16PD-960W	700-1000			26	15					0.5	1.3							0.6			1.10	1.60	1.06	1.30	UU179	—	265.00
ZC16PD-1900	1700-1900			30	20					0.5	1.0							0.8			1.15	1.35	1.06	1.30	UU179	—	309.00
ZC16PD-1900W	1500-2100			30	15					0.7	1.4							0.8			1.25	1.60	1.15	1.35	UU179	—	319.00
ZC16PD-23	1500-2300			32	20					0.8	1.4				11			0.6			1.15	1.60	1.10	1.40	UU640	—	319.00
ZC16PD-2185	1800-2600			30	16					0.5	1.4				6			0.7			1.15	1.60	1.05	1.30	UU179	—	319.00

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

pin and coaxial connections see case style outline drawings

PORT	SUM	#1	#2	#3	#4	#5	#6	#7	#8	#9	#10	#11	#12	#13	#14	#15	#16	NOT USED	GND EXT.	CASE GND
bu	5	7	8	1	2	31	32	25	26	22	30	19	27	—	—	—	—	11,14,21	4	all other pins
kf	18	2	3	4	5	9	10	11	12	13	14	15	16	20	21	22	23	—	all other pins	—
lx	18	2	3	4	5	8	9	10	11	14	15	22	23	—	—	—	—	—	all other pins	—



The Design Engineers Search Engine
Provides Actual Data Instantly
At: <http://www.minicircuits.com>

In Stock... Immediate Delivery
For Custom Versions Of Standard Models
Consult Our Applications Dept.

