


# PRODUCT INFORMATION

870nm

**1A184A**  
High-Performance LED

**FM Video**

The low harmonic distortion makes this device ideal for subcarrier FM video applications. Video transmission can be accomplished with minimum distortion. The double-lens optical system provides for optimum coupling of power into the fiber.

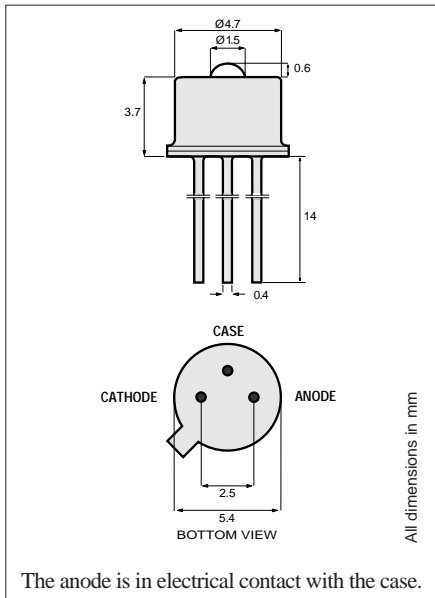

**TO-46 Package With Lens**

All dimensions in mm

## Optical and Electrical Characteristics (25° C Case Temperature)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Fiber-Coupled Power (Fig. 1,2,&3) (Table 1)	$P_{\text{fiber}}$	40	55		$\mu\text{W}$	$I_F=100\text{ mA}$
Rise and Fall Time (10-90%)	$t_r, t_f$		2.5	3	ns	$I_F=100\text{ mA}$ (no bias)
Bandwidth (3dB <sub>el</sub> )	$f_c$		140		MHz	$I_F=100\text{ mA}$
Harmonic Distortion (nonlinearity)	-H <sub>2</sub>		40		dB	$I_F=80\text{ mA}$ $m=0.8$ $f=10\text{ MHz}$
	-H <sub>3</sub>		45		dB	
Peak Wavelength	$\lambda_p$	850	870	890	nm	$I_F=100\text{ mA}$
Spectral Width (FWHM)	$\Delta\lambda$		60		nm	$I_F=100\text{ mA}$
Forward Voltage (Fig.5)	$V_F$		1.8	2.2	V	$I_F=100\text{ mA}$
Reverse Current	$I_R$			20	$\mu\text{A}$	$V_R=1\text{ V}$
Capacitance	$C$		250		pF	$V_R=0\text{ V}, f=1\text{ MHz}$

Note 1: Measured at the exit of 100 meters of fiber.

## Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT
Storage Temperature	$T_{\text{stg}}$	-55 to +125° C
Operating Temperature see (derating: Fig.4)	$T_{\text{op}}$	-55 to +125° C
Electrical Power Dissipation (derating: Fig.4)	$P_{\text{tot}}$	250 mW
Continuous Forward Current ( $f \leq 10\text{ kHz}$ )	$I_F$	110 mA
Peak Forward Current (duty cycle $\leq 50\%$ , $f \geq 1\text{ MHz}$ )	$I_{\text{FRM}}$	180 mA
Reverse Voltage	$V_R$	1.5 V
Soldering Temperature (2mm from the case for 10sec)	$T_{\text{sld}}$	260° C

## Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink	$R_{\text{thjc}}$			100	°C/W
Thermal Resistance - No Heat Sink	$R_{\text{thja}}$			400	°C/W
Temperature Coefficient - Optical Power	$dP/dT_j$		-0.6		%/°C
Temperature Coefficient - Wavelength	$d\lambda/dT_j$		0.3		nm/°C

11705.12 1995-09-01



Europe: Tel (46) 8 58 02 45 00 Fax (46) 8 58 02 01 10  
 Tel (44) 1291 436180 Fax (44) 1291 436771

America: Tel 1-800-96MITEL Fax (613) 592-6909  
 Asia: Tel (65) 293 5312 Fax (65) 293 8527

Typical Fiber-Coupled Power			
CORE DIAMETER/CLADDING DIAMETER NUMERICAL APERTURE			
50/125 $\mu\text{m}$ 0.20	62.5/125 $\mu\text{m}$ 0.275	100/140 $\mu\text{m}$ 0.29	200/230 $\mu\text{m}$ 0.37
55 $\mu\text{W}$	150 $\mu\text{W}$	300 $\mu\text{W}$	390 $\mu\text{W}$

Table 1

