

GP1L55

High Sensitivity Photointerrupter

■ Features


1. Compact package
(Case height : 8mm)
2. High sensing accuracy
(Slit width...Detector : 0.15mm, Emitter : 0.5mm)
3. Easy positioning on PWB with positioning pin

■ Applications

1. Floppy disk drives
2. VCRs, Cassette decks
3. optoelectronic switches, electronic counters, edge sensors.

■ Outline Dimensions

(Unit : mm)

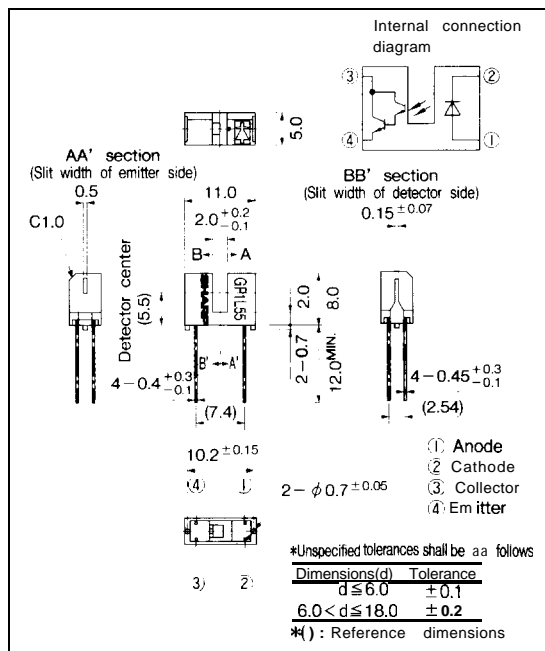

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter	Symbol	Rating	Unit
Forward current	I _F	50	mA
*1 Peak forward current	I _{FM}	1	A
Reverse voltage	V _R	6	V
Power dissipation	P	75	mW
Collector-emitter voltage	V _{CEO}	35	V
Emitter-collector voltage	V _{ECO}	6	V
Collector current	I _C	40	mA
Collector power dissipation	P _C	75	mW
Operating temperature	T _{opr}	-25 to +85	°C
Storage temperature	T _{stg}	-40 to +100	°C
*2 Soldering temperature	T _{sol}	260	°C

*1 Pulse width ≤ 100 μs, Duty ratio = 0.01

*2 For 5 seconds

Electro-optical Characteristics

($T_a = 25^\circ\text{C}$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX	Unit	
Input	Forward voltage	V_F	$I_F = 20\text{mA}$		1.2	1.4	V	
	Peak forward voltage	V_{FM}	$I_{FM} = 0.5\text{A}$		3	4	V	
	Reverse current	I_R	$V_R = 3\text{V}$			10	μA	
output	Collector dark current	I_{CEO}	$V_{CE} = 10\text{V}$			10^{-6}	A	
Transfer characteristics	Current transfer ratio	CTR	$I_F = 2\text{mA}, V_{CE} = 2\text{V}$	30	—	—	%	
	Collector -emitter saturation voltage	$V_{CE(sat)}$	$I_F = 4\text{mA}, I_C = 0.6\text{mA}$			1	V	
	Response time	Rise time	t_r	$V_{CE} = 2\text{V}, I_C = 10\text{mA}$		80	400	μs
		Fall time	t_f	$R_L = 100\Omega$	—	70	350	μs

Fig. 1 Forward Current vs. Ambient Temperature

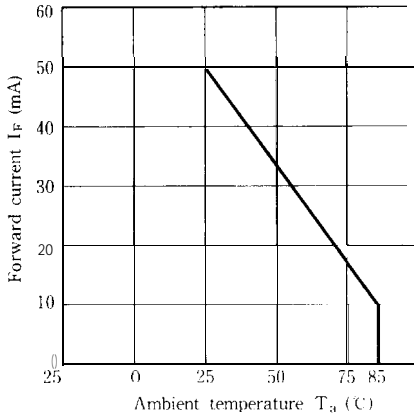


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

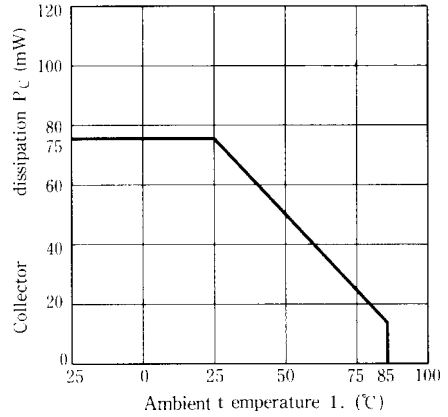


Fig. 3 Peak Forward Current vs. Duty Ratio

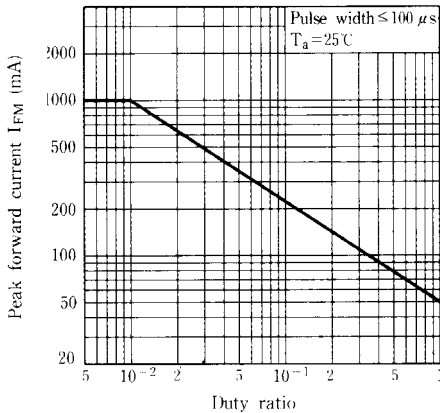


Fig. 4 Forward Current vs. Forward Voltage

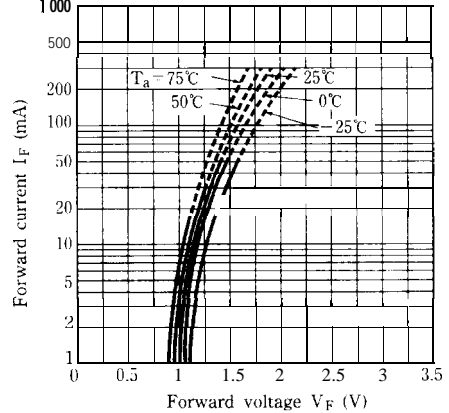


Fig. 5 Collector Current vs. Forward Current

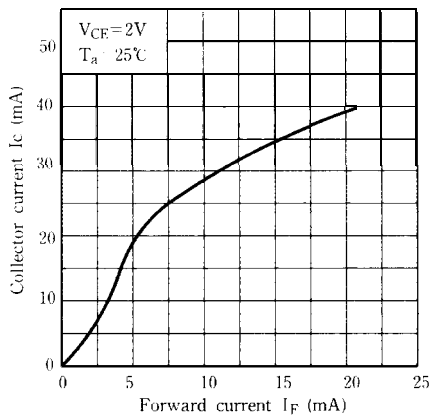


Fig. 6 Collector Current vs. Collector-emitter Voltage

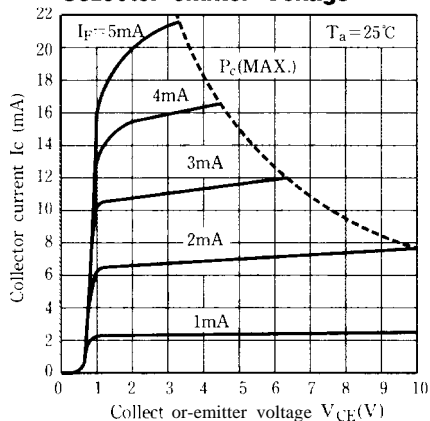


Fig. 7 Collector current vs. Ambient Temperature

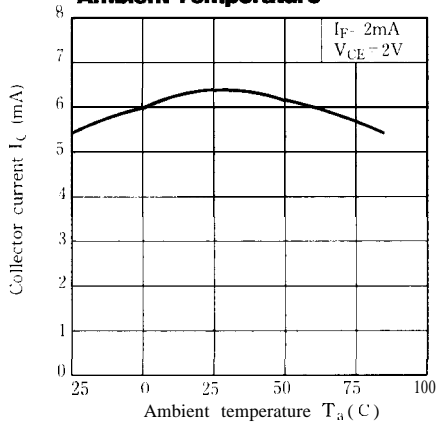


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature



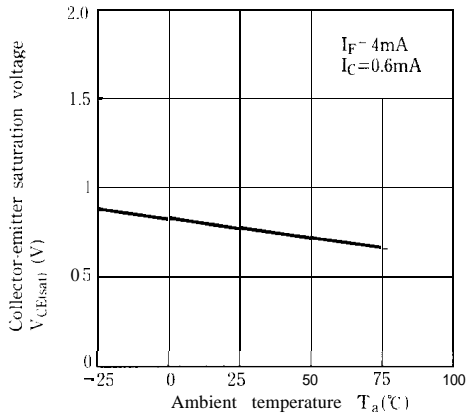


Fig. 9 Response Time vs. Load Resistance

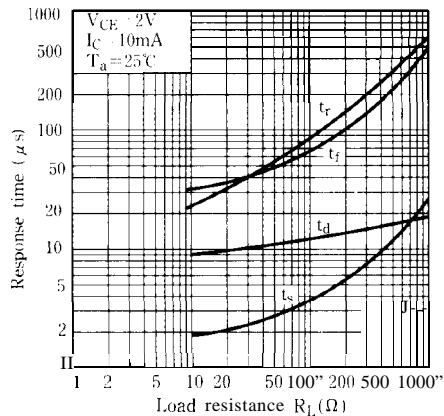

Test Circuit for Response Time

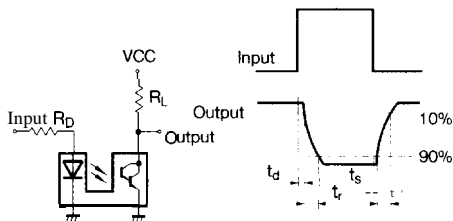

Photointerrupters



Fig.10 Frequency Response

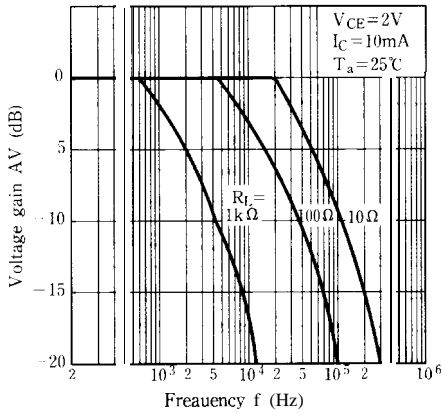


Fig.11 Collector Dark Current vs. Ambient Temperature

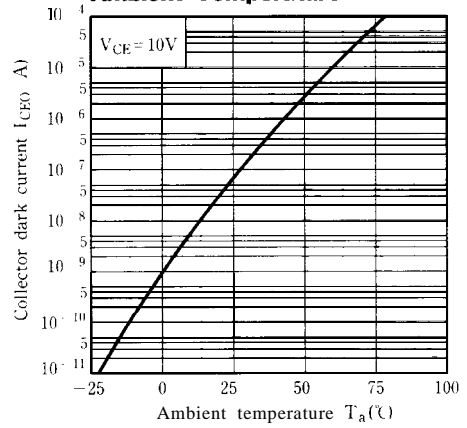


Fig.12 Relative Collector Current vs. Shield Distance(1)


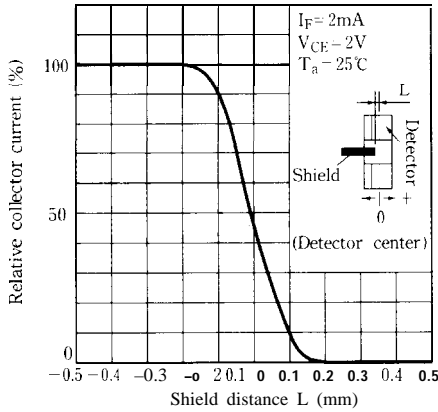


Fig.13 Relative Collector Current vs. Shield Distance(2)

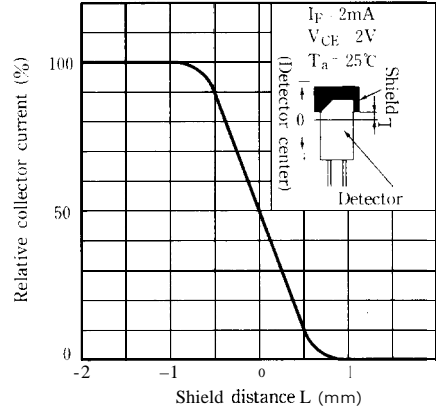

■ Precautions for Use

(1) In case of cleaning, use only the following type of cleaning solvent.

Ethyl alcohol, Methyl alcohol, Isopropyl alcohol

(2) As for other general cautions, refer to the chapter "Precautions for Use" (Page 78 to 93).