


Models 303134 through to 303138 (Ultra High Precision Surface Mount Chip Resistors, VSMP Z-Foil Technology Configuration), Screen/Test Flow in Compliance with EEE-INST-002, (Tables 2A and 3A, Film/Foil, Level 1) and MIL-PRF-55342

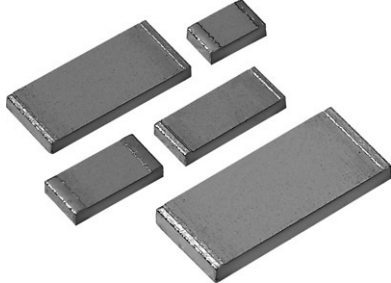

Top View

INTRODUCTION

The 303134 through to 303138 series is the first surface mount device to provide high rated power, excellent load life stability along with extremely low TCR all in one resistor.

One of the most important parameters influencing stability is the temperature coefficient of resistance (TCR). Although the TCR of foil resistors is considered extremely low, this characteristic has been further refined over the years. The 303134 through to 303138 Series utilizes ultra high precision Bulk Metal® Z-Foil. The Z-Foil technology provides a significant reduction of the resistive element's sensitivity to ambient temperature variations (TCR) and to self heating when power is applied (power coefficient). Along with the inherently low PCR and TCR, Z-Foil technology also provides remarkably improved load life stability, low noise and availability of tight tolerance.


The 303134 through to 303138 series has a full wraparound termination which ensures safe handling during the manufacturing process, as well as providing stability during multiple thermal cyclings.



Our application engineering department is available to advise and make recommendations.

FEATURES

- Temperature coefficient of resistance (TCR):
0.05 ppm/°C typical (0 °C to + 60 °C)
0.2 ppm/°C typical (- 55 °C to + 125 °C, + 25 °C ref.)
- Tolerance: to ± 0.02 %
- Power coefficient “ΔR due to self heating”:
5 ppm at rated power
- Power rating: to 400 mW at + 70 °C
- Load life stability: to ± 0.03 % at 70 °C, 2000 h at rated power
- Resistance range: 10 Ω to 75 kΩ
- Vishay Foil resistors are not restricted to standard values, we can supply specific “as required” values at no extra cost or delivery (e.g. 1K2345 vs. 1K)
- Fast thermal stabilization < 1 s
- **Electrostatic discharge (ESD) up to 25 000 V**
- Short time overload: ≤ 0.02 %
- Non-inductive, non-capacitive design
- Rise time: 1 ns effectively no ringing
- Current noise: - 42 dB
- Voltage coefficient < 0.1 ppm/V
- Non-inductive: < 0.08 μH
- Non hot spot design
- Terminal finish: tin/lead alloy
- Matched sets are available on request
- For prototype units, append a “U” to the model number (example: 303134U). These units have all of the table 2A (page 3) 100 % tests performed, with no destructive qualification testing required (table 3A, page 4). For more information, please contact foil@vishaypg.com

TABLE 1 - TOLERANCE AND TCR VS. RESISTANCE VALUE (- 55 °C to + 125 °C, + 25 °C ref.)		
RESISTANCE VALUE (Ω)	TOLERANCE (%)	MAXIMUM TCR (ppm/°C)
250 to 75K	± 0.02	± 3
100 to < 250	± 0.05	± 3
50 to < 100	± 0.1	± 4
25 to < 50	± 0.25	± 5
10 to < 25	± 0.5	± 5

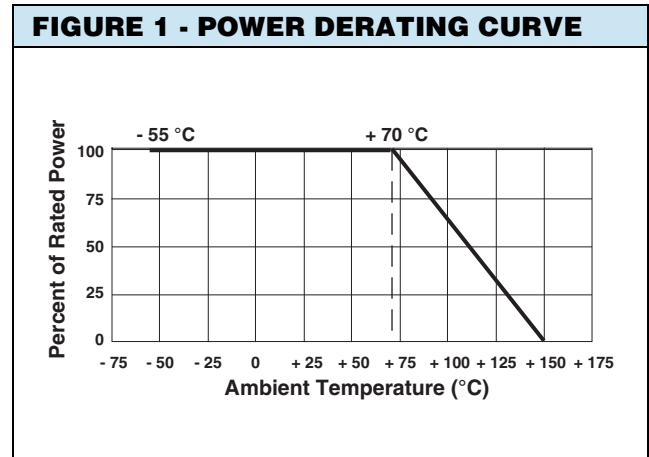

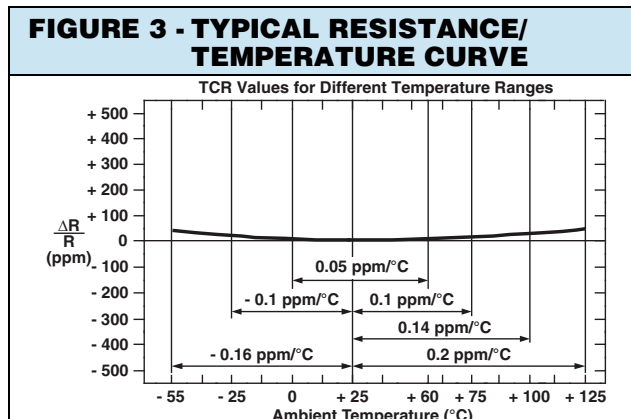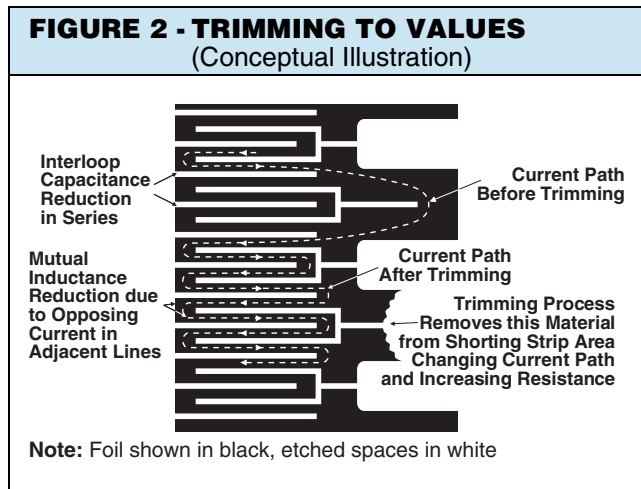

Note
• The TCR values for < 100 Ω are influenced by the termination composition and result in deviation from this curve.

TABLE 2 - DIMENSIONS AND LAND PATTERN in Inches (Millimeters)

MODEL (CHIP SIZE)	L ± 0.005 (0.13)	W ± 0.005 (0.13)	THICKNESS MAXIMUM	D ± 0.005 (0.13)	Z ⁽¹⁾	G ⁽¹⁾	X ⁽¹⁾
303134 (0805)	0.080 (2.03)	0.050 (1.27)	0.025 (0.64)	0.015 (0.38)	0.122 (3.10)	0.028 (0.71)	0.050 (1.27)
303135 (1206)	0.126 (3.20)	0.062 (1.57)	0.025 (0.64)	0.020 (0.51)	0.175 (4.45)	0.059 (1.50)	0.071 (1.80)
303136 (1506)	0.150 (3.81)	0.062 (1.57)	0.025 (0.64)	0.020 (0.51)	0.199 (5.05)	0.083 (2.11)	0.071 (1.80)
303137 (2010)	0.198 (5.03)	0.097 (2.46)	0.025 (0.64)	0.025 (0.64)	0.247 (6.27)	0.115 (2.92)	0.103 (2.62)
303138 (2512)	0.249 (6.32)	0.127 (3.23)	0.025 (0.64)	0.032 (0.81)	0.291 (7.39)	0.150 (3.81)	0.127 (3.23)

Note
⁽¹⁾ Land Pattern Dimensions are per IPC-7351A

TABLE 3 - SPECIFICATIONS


MODEL (CHIP SIZE)	RATED POWER (mW) at + 70 °C	MAX. WORKING VOLTAGE (≤ √P × R)	RESISTANCE RANGE (Ω)	MAXIMUM WEIGHT (mg)
303134 (0805)	100	22 V	10 to 5K	6
303135 (1206)	150	46 V	10 to 14K	11
303136 (1506)	200	57 V	10 to 16K	12
303137 (2010)	300	102 V	10 to 35K	27
303138 (2512)	400	173 V	10 to 75K	40

TABLE 4 - PERFORMANCES

TEST OR CONDITIONS	MIL-PRF-55342 CHARACTERISTIC E ΔR LIMITS	TYPICAL ΔR LIMITS	MAXIMUM ΔR LIMITS ⁽¹⁾
Thermal Shock, 100 x (- 65 °C to + 150 °C)	± 0.1 %	± 0.005 % (50 ppm)	± 0.01 % (100 ppm)
Low Temperature Operation, - 65 °C, 45 min at Rated Power	± 0.1 %	± 0.005 % (50 ppm)	± 0.02 % (200 ppm)
Short Time Overload, 6.25 x Rated Power, 5 s	± 0.1 %	± 0.005 % (50 ppm)	± 0.02 % (200 ppm)
High Temperature Exposure, + 150 °C, 100 h	± 0.1 %	± 0.01 % (100 ppm)	± 0.03 % (300 ppm)
Resistance to Soldering Heat	± 0.2 %	± 0.005 % (50 ppm)	± 0.02 % (200 ppm)
Moisture Resistance	± 0.2 %	± 0.005 % (50 ppm)	± 0.04 % (400 ppm)
Load Life Stability + 70 °C for 2000 h at Rated Power	± 0.5 %	± 0.005 % (50 ppm)	± 0.03 % (300 ppm)

Note
⁽¹⁾ As shown + 0.01 Ω to allow for measurement errors at low values.

FIGURE 4 - RECOMMENDED MOUNTING (1)(2)(3)

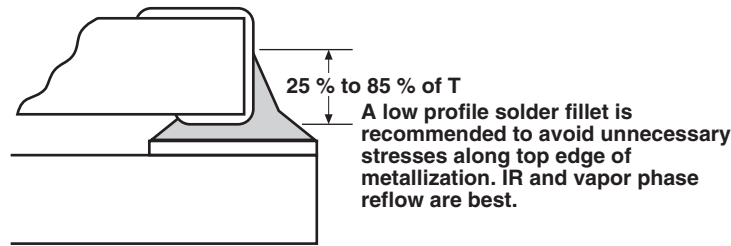

Notes

- (1) Avoid the use of cleaning agents which could attack epoxy resins, which form part of the resistor construction
- (2) Vacuum pick up is recommended for handling
- (3) Soldering iron may damage the resistor

MODEL NUMBER	303134	303135	303136	303137	303138
CHIP SIZE	0805	1206	1506	2010	2512
VALUE RANGE (SPACE APPLICATIONS)	10 Ω to 5 k Ω	10 Ω to 14 k Ω	10 Ω to 16 k Ω	10 Ω to 35 k Ω	10 Ω to 75 k Ω
RATED POWER AT 70 °C	100 mW	150 mW	200 mW	300 mW	400 mW

Notes

- (1) Measurement error allowed for ΔR limits: 0.01 Ω .
- (2) An additional 54 sample units per lot which successfully pass 100 % screening are to be used for destructive testing and are to be kept on file at the plant of manufacture.
- (3) Lot definition (1 lot = 1 primary flowcard): Each value per chip size should be qualified individually. Contact Vishay application engineering for alternative lot definitions.
- (4) For prototype units, append a "U" to the model number (example: 303134U). These units have all of the table 2A 100 % tests performed, with no destructive qualification testing required.

TABLE 5 - EEE-INST-002 (TABLE 2A FILM/FOIL, LEVEL 1) 100 % TESTS/INSPECTIONS

Pre-cap Visual Inspection	Performed in production flow prior overcoating
RC Record	In tolerance
Thermal Shock	25 x (- 65 °C to + 150 °C)
Power Conditioning	70 °C, 100 h, 1.5 rated power - not to exceed max. voltage
RC Record	In tolerance $\Delta R = 0.05$ % for thermal shock and conditioning combined
Final Inspection	5 % PDA on ΔR only, 10 % PDA on "Out of Final Tolerance"
Visual Inspection	Materials, design, etc.
Mechanical Inspection	Physical dimensions, sample size: 3 units, zero failure

TABLE 6 - EEE-INST-002 (TABLE 3A FILM/FOIL, LEVEL 1) DESTRUCTIVE TESTS

Group 2	Sample size: 3, zero failure Solderability									
Group 3	<p>Sample size: 10, zero failure - mounted on FR4</p> <table border="1" data-bbox="802 485 1247 682"> <thead> <tr> <th>Values</th> <th>TCR limits</th> </tr> </thead> <tbody> <tr> <td>≥ 100 Ω</td> <td>± 3 ppm/°C</td> </tr> <tr> <td>50 Ω to < 100 Ω</td> <td>± 4 ppm/°C</td> </tr> <tr> <td>10 Ω to < 50 Ω</td> <td>± 5 ppm/°C</td> </tr> </tbody> </table> <p>TCR (- 55 °C/+ 25 °C/+ 125 °C)</p> <p>Low temperature storage ΔR = 0.02 % - 65 °C no load dwell for 24 h ± 4 h + 25 °C ambient no load dwell for 2 h to 8 h</p> <p>Low temperature operation ΔR = 0.02 % - 65 °C no load dwell for 1 h rated power for 45 min + 25 °C ambient no load dwell for 24 h ± 4 h</p> <p>Short time overload ΔR = 0.02 % 6.25 x rated power, 5 s - no "I" limitation: not to exceed twice the maximum voltage</p>		Values	TCR limits	≥ 100 Ω	± 3 ppm/°C	50 Ω to < 100 Ω	± 4 ppm/°C	10 Ω to < 50 Ω	± 5 ppm/°C
Values	TCR limits									
≥ 100 Ω	± 3 ppm/°C									
50 Ω to < 100 Ω	± 4 ppm/°C									
10 Ω to < 50 Ω	± 5 ppm/°C									
Group 4	Sample size: 9, zero failure - mounted on FR4 Resistance to soldering heat ΔR = 0.02 % Performed per MIL-PRF-55342 para. 4.8.8.1									
Group 6	Sample size: 12, zero failure - mounted on FR4 Life ΔR = 0.03 % 2000 h, + 70 °C, rated power									
Group 7B	Sample size: 10, zero failure - mounted on FR4 Solder mounting integrity Performed per MIL-PRF-55342 For 0805, 1206, 1506: force applied: 2 kg, 30 s For 2010, 2512: force applied: 3 kg, 30 s									
Group 8	Sample Size: 5, zero failure - chips not mounted Voltage coefficient ΔR = 0.1 ppm/V Applicable resistors ≥ 10K Performed per MIL-STD-202 method 309									
Group 9	Sample size: 5, zero failure - mounted on FR4 High temperature exposure ΔR = 0.03 % Performed per MIL-PRF-55342 100 h at + 150 °C ± 5 °C									

TABLE 7 - PART NUMBER IDENTIFICATION

Model #	303134	303135	303136	303137	303138
Chip Size	0805	1206	1506	2010	2512
Value Range (Space Application)	10 Ω to 5 kΩ	10 Ω to 14 kΩ	10 Ω to 16 kΩ	10 Ω to 35 kΩ	10 Ω to 75 kΩ

Part Number:

{Model} - {Value} - {Tolerance} - {Termination} - {Packaging}

Resistance Value	Tolerance (Tightest)	Code
250R to 75K	0.02 %	Q
100R to < 250R	0.05 %	A
50R to < 100R	0.1 %	B
25R to < 50R	0.25 %	C
10R to < 25R	0.5 %	D

Termination	Code
Tin/lead	B

Packaging	Code
Waffle	W
Tape and reel	T

Example: 303135 - 10K025 - DBW

1206 chip size, 10.025 kΩ, 0.5 %, tin/lead termination, waffle packaging

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.