


Digital Compression Load Cell

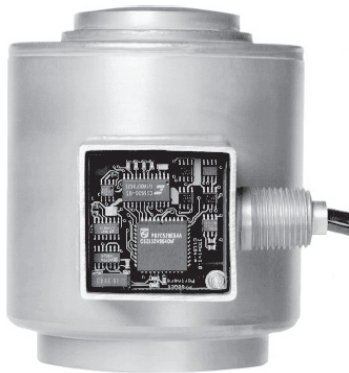

FEATURES

- Capacities: 10 - 100 ton
- Digital output via RS-485 or RS-422 interface
- Low profile, multi-column, stainless steel construction
- Hermetically sealed, IP66 and IP68
- Certified to OIML R-60, 4000d
- Multiple-range versions available
- Internal diagnostics and lightning protection
- 240,000 counts resolution
- Maximum transmission distance 1200m

DESCRIPTION

The SCC is a multi-column, low profile, stainless steel, compression load cell with a digital output signal.

This digital output enables the user to communicate with each SCC independently of the others in the system, thus offering advantages in system setup, system control, corner correction, fault finding and load cell replacement.


Suitable applications for this product include various types of road and rail weighbridges, and process weighing.

This product meets the stringent Weights and Measures requirements throughout Europe.

APPLICATIONS

- Weighbridges
- Silo hopper weighing

OUTLINE DIMENSIONS in mm

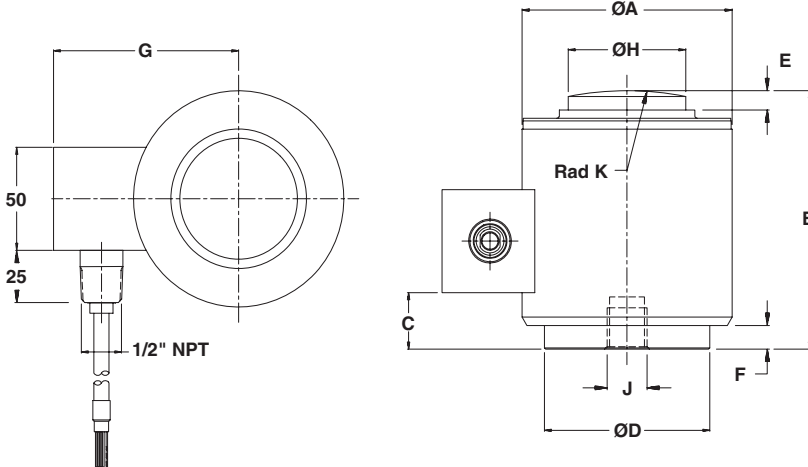

Cable specifications:

Cable length: 10 meters for 10t
20 meters all others

Excitation + Green
Excitation - Black
Rx + Yellow
Rx - Blue
Tx + Red
Tx - White
Shield Clear

Note: Dimensions are in millimeters

Capacity (t)	10, 25	40, 60	100
A	73.0	105.0	152.4
B	82.5	127.0	184.2
C	7.0	29.0	67.5
D	58.0	82.5	123.8
E	6.5	8.0	23.6
F	1.8	11.0	21.8
G	79.5	99.0	124.8
H	31.8	58.7	79.2
J	M12x1.75 (11 Deep)	M20x2.5 (20 Deep)	
K Rad	152.0	152.0	432.0

SPECIFICATIONS

PARAMETER	VALUE			UNIT
Standard capacities (E_{max})	10, 25, 40, 60, 100			ton
Accuracy class according to OIML R-60	CC	C3	C4	
Maximum no. of verification intervals (n)		3000	4000	
Minimum verification interval ($V_{min}=E_{max}/Y$)		$E_{max}/10000$	$E_{max}/10000$	
Minimum verification interval, type MR		$E_{max}/20000$	$E_{max}/20000$	
Rated output (FSO)	240,000			counts
Tolerance on rated output	200			±counts
Zero balance	200			±counts
Combined error	0.0500	0.0200	0.0173	±% FSO
Non-repeatability	0.0200	0.0100	0.0090	±% FSO
Minimum dead load output return	0.0500	0.0167	0.0125	±% FSO
Creep error (30 minutes)	0.0600	0.0245	0.0184	±% FSO
Temp. effect on min. dead load output	0.0250	0.0070	0.0070	±% FSO/5°C
Temp. effect on min. dead load output MR		0.0035	0.0035	±% FSO/5°C
Temperature effect on sensitivity	0.0250	0.0050	0.0040	±% FSO/5°C
Compensated temperature range	-10 to +40			°C
Operating temperature range	-40 to +80			°C
Storage temperature range	-40 to +90			°C
Maximum safe over load	150			% E_{max}
Ultimate over load	400			% E_{max}
Maximum safe side load	10			% E_{max}
Deflection at E_{max}	0.36 max			mm
Excitation voltage	12.5 to 18.0			Vdc
Maximum excitation voltage	15			Vdc
Maximum current consumption	80			mA
Start up current	150			mA
Insulation resistance	>5000			MΩ
Element material (DIN)	Stainless steel 1.4542			
Sealing (DIN 40.050 / EN60.529 / IEC 529)	IP66 and IP68			
Signal update per second	25			
Baudrate	9600			Bits/s
Transmission type	Asynchronous serial transmission			
Start bits	1			
Data bits	7			
Stop bits	1			
Parity	Odd			
Maximum transmission cable length	1200			m
Data transmission interface	RS422 (4 communication wires)/RS485 (2 communication wires)			

FSO - Full Scale Output

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.