## 911 automatic antenna tuner

The GMDSS approved 911 automatic antenna tuner is designed for operation in both marine mobile and land base station installations.

Housed in a fully weatherproof enclosure the 911 will tune long wire antennas, wire loop antennas or whip antennas over a frequency range of 2 to 30MHz. Tuning is rapid, typically less than two seconds the first time RF is applied, either whilst the operator is talking or when the "Tune" control is activated on the transceiver.

The 911 tuner features a memory facility that stores the configuration required to tune to a frequency. On any subsequent use of that frequency the 911 reconfigures to the stored settings in typically 25 milliseconds. Following initial tuning the antennas VSWR is monitored. If any significant variation occurs the 911 will re-tune the antenna automatically.

The 911 is supplied complete with fully terminated control cables having an overall length of 6 metres. This comprises of a 1.5 metre stub cable with a 4.5 metre extension cable for connection to the transceiver. The cable is a composite design incorporating coaxial, power supply and control cables. Additional extension cables are available as required.

#### **SPECIFICATIONS**

Frequency range 2 to 30MHz

Channel capacity Unlimited (Memory stores

10 FIFO).

Power rating 150 Watts PEP voice only Power Requirements 12 Volts DC (nominal)


1 Amp (nominal)

**Input impedance:** 50 ohms, unbalanced


**DC Isolation** Built-in

**Dimensions** H350 X W285 X D75 mm

Weight 3.5Kg





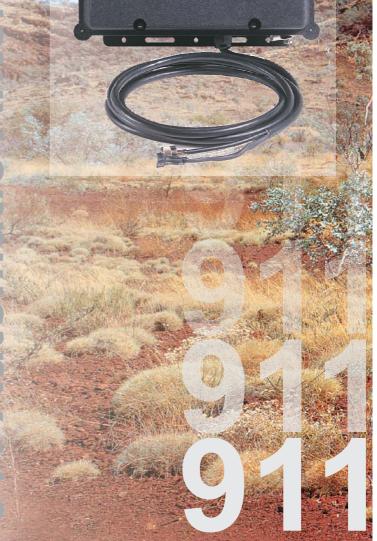

BARRETT

www.barrettcommunications.com.au

# 917 Marine Whip Antennas



The 917 series unloaded marine whip antennas are designed to operate in all marine bands from 2 to 30 MHz.

Manufactured from heavy gauge aluminium tubing with a polymer coating or fibreglass with a rugged coating for marine and UV protection, they offer a large, low loss radiating surface. All fittings are manufactured from nylon, stainless steel and chromed bronze.

917 whip antennas are supplied in a range of sizes and mounting configurations to suit differing types and sizes of

#### BC91710: 3.6 metre marine swing down whip antenna

Is a 3.6 metre whip suitable for smaller vessels, particularly high speed craft. It is supplied complete with a stainless steel swing-down base fitting.

#### BC91711: 5.5 metre two piece marine side mount whip antenna

Is a 5.5 metre whip suitable for vessels over 10 metres in length. The whip is supplied in two sections which screw together on a self locking taper. Also included are sidemount insulators for mounting against a vertical structure.

### BC91712: 8.0 metre high efficiency marine side mounted whip antenna

Is an 8.0 metre whip suitable for large vessels, the whip is supplied in two sections and is supplied complete with side-mount insulators for mounting against a vertical structure.

## BC91713: 10 metre GMDSS high power whip

Is a 10 metre, GMDSS standard, base mounted whip suitable for large vessels. It is designed for professional use and can withstand wind speeds of up to 200Kph without permanent deformation.

#### **SPECIFICATIONS**

Frequency range 2 to 30MHz

**Radiation Pattern** Omnidirectional

**Polarisation** Vertical

**Power Rating** BC91710 -400 Watts

> BC91711 -800 Watts BC91712 -1000 Watts BC91713 -1000 Watts

Barrett Communications Pty Ltd P O Box 1214, Bibra Lake WA 6965 AUSTRALIA Toll Free Tel: 1800 999 580 Tel: (618) 9434 1700 Fax: (618) 9418 6757

email: information@barrettcommunications.com.au

#### **European Office:**

Barrett Europe Limited, Unit 9, Fulcrum 2, Victory Park, Solent Way, Whiteley, PO15 7FN UNITED KINGDOM Tel: (44) 1420 542254 Fax: (44) 1420 543373 email: information@barretteurope.co.uk

#### Americas Office:

BC91710

Barrett USA LLC 15941 W. 65th Street Suite 373, Shawnee, Kansas 66217 USA Tel: +1 913 322 6231 Fax +1 913 273 0779 email: information@barrettusa.com

BC91711

BC91712



MADE IN AUSTRALIA

BC91713



