

# MPG 200S20

## MICROPULSE GENERATOR



### FOR TESTS ACCORDING TO ...

- › GOST 28751-90
- › ISO 7637-1:1990

### MPG 200S20 - AUTOMOTIVE MICROPULSE GENERATOR

Micropulses occur on the battery supply system when an inductive load is disconnected from the DC supply. These pulses are of a medium energy content having a rise time in the low microsecond range and a duration of several tenth or hundreds/thousands of microseconds. Their polarity depends on whether the inductive load is of a passive (e.g. a heater) or an active type (e.g. a DC motor).

The MPG 200S20 has a built-in battery switch to interrupt the DC supply voltage as required by the standards. It is designed to generate pulses 1b and 6 as per GOST standard 28751-90 as well as pulse 6 as per ISO 7637-1:1990.

### HIGHLIGHTS

- › **STANDALONE TEST GENERATOR**
- › **TEST VOLTAGE UP TO 1,100V**
- › **INCLUDES 30, 50, 100, 150 AND 200OHM SOURCE IMPEDANCE**
- › **BUILT-IN ELECTRONIC BATTERY SWITCH**
- › **BUILT-IN CDN 60V/25A DC**
- › **FRONT PANEL OPERATION**

### APPLICATION AREAS

-  AUTOMOTIVE
-  TELECOM

## TECHNICAL DETAILS

### PULSE SPECIFICATIONS

Voltage (o.c.)	$U = 50V - 1,100V \pm 10\%$
Int. resistor	selectable 30ohm, 50ohm, 100ohm, 150ohm, 200ohm other values: by external plug-in modul
Polarity	Positive/negative

### GOST PULSE 1B (24V)

Voltage (o.c.)	50V - 1,100V
Rise time	9us +0%/- 50% (10 - 90%)
Pulse duration	1ms $\pm 10\%$ (10 - 10%)
Int. resistor	50ohm $\pm 10\%$

### ISO PULSE 6 (12V/24V)

Voltage (o.c.)	25V - 400V
Rise time	60us +0%/-50% (10 - 90%)
Pulse duration	300us $\pm 10\%$ (10 - 10%)
Int. resistor	30ohm $\pm 10\%$

### TRIGGER

Automatic	Automatic release of the pulses
Repetition rate	0.2s - 99.0s
Manual	Manual release of a single pulse
External	External release of a single pulse
Supply switch	Off time, selectable; 0 - 10,000ms

### OUTPUT

DUT supply +/-	Safety laboratory connectors
Coupling	To the battery +line
Decoupling	Via diode and battery supply switch
DUT supply	Max. 60V/25A

### TEST ROUTINES

Quick Start	Immediate start; easy-to-use and fast
User Test routines	Change voltage after n pulses
Service	Service, setup, self test

### INTERFACE

Serial interface	RS 232, baud rate 1,200 - 19,200
Parallel interface	IEEE 488, address 1 - 30
CN interface	To control external coupling network


### GENERAL DATA

Dimensions, weight	19"/6HU, approx. 20kg
Supply voltage	115/230V +10/-15%
Fuses	2 x T 1AT

### OPTIONS

ISMISO	Software control the test, including standard library, test report facility and data conversion generator
--------	---

# COMPETENCE WHEREEVER YOU ARE

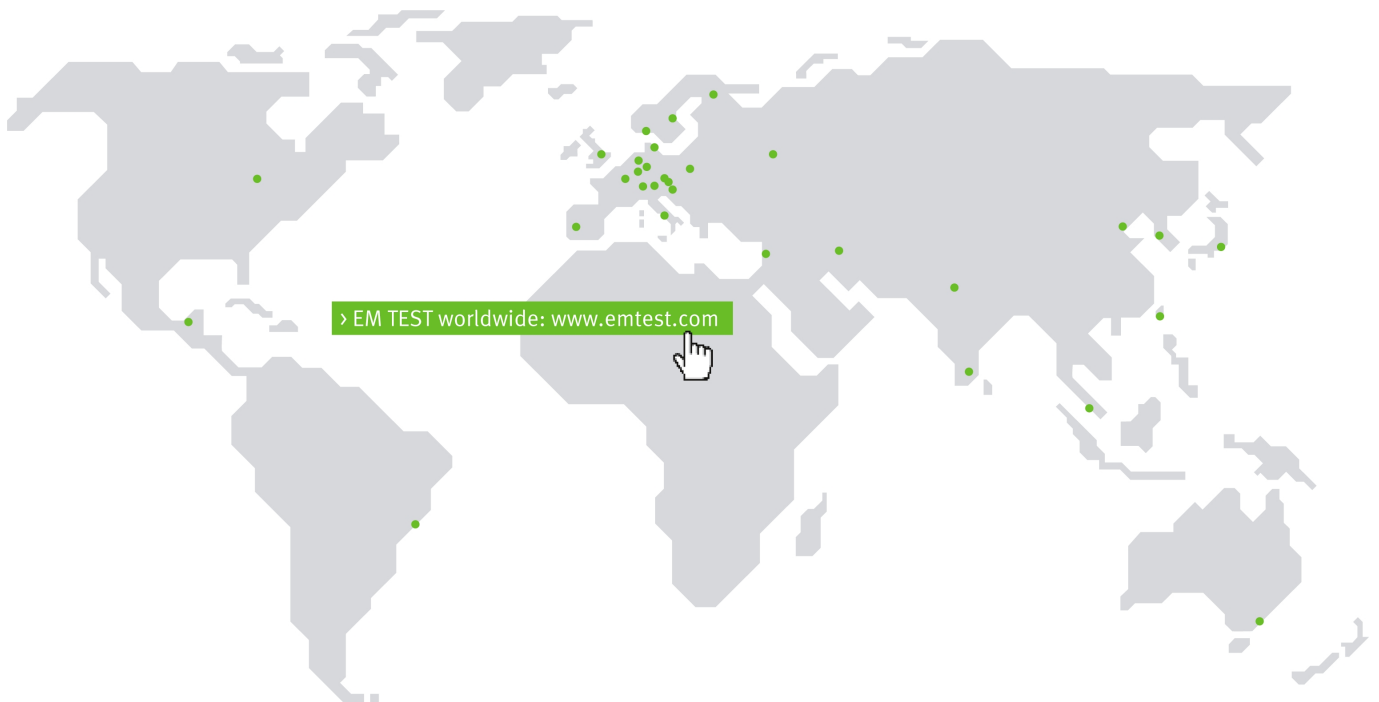

## CONTACT EM TEST DIRECTLY

### Switzerland

EM TEST AG › Sternenhofstraße 15 › 4153 Reinach › Switzerland  
 Phone +41 (0)61/7179191 › Fax +41 (0)61/7179199  
 Internet: [www.emtest.ch](http://www.emtest.ch) › E-mail: [sales@emtest.ch](mailto:sales@emtest.ch)

### Germany

EM TEST GmbH › Lünener Straße 211 › 59174 Kamen › Deutschland  
 Phone +49 (0)2307/26070-0 › Fax +49 (0)2307/17050  
 Internet: [www.emtest.com](http://www.emtest.com) › E-mail: [info@emtest.de](mailto:info@emtest.de)

### France

EM TEST FRANCE › Le Trident - Parc des Collines › Immeuble B1 - Etage 3 ›  
 36, rue Paul Cézanne › 68200 Mulhouse › France  
 Phone +33 (0)389 31 23 50 › Fax +33 (0)389 31 23 55  
 Internet: [www.emtest.fr](http://www.emtest.fr) › E-mail: [info@emtest.fr](mailto:info@emtest.fr)

### P.R. China

EM TEST Representative Office Beijing › Rm 913, Leftbank ›  
 No. 68 Bei Si Huan Xi Lu › Haidian District › Beijing 100080 › P.R. China  
 Phone +86 (0)10 82 67 60 27 › Fax +86 (0)10 82 67 62 38  
 Internet: [www.emtest.com](http://www.emtest.com) › E-mail: [emtestbj@public.bta.net.cn](mailto:emtestbj@public.bta.net.cn)

### Malaysia

EM TEST (M) SDN BHD › Unit B2-6, Jalan Dataran SD2 › Dataran SD2, PJU9 ›  
 Bandar Sri Damansara › 52200 Kuala Lumpur › Malaysia  
 Phone +60 (03)62 73 22 01 › Fax +60 (03)62 74 22 01  
 Internet: [www.emtest.com](http://www.emtest.com) › E-mail: [sales@emtest.com.my](mailto:sales@emtest.com.my)

### Poland

EM TEST Polska › ul. Lema 33, 26-613 Radom › Polska  
 Phone +48 518 64 35 12 › E-mail: [info.polska@emtest.de](mailto:info.polska@emtest.de)

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release.  
 Technical data subject to change without further notice.