

## Analysis Probe Ejector Tool Guide

The ejector tool provided with your analysis probe is used to remove the probe from your target's BGA socket.

---

**CAUTION:**

---

Turn off the power to the analysis probe and target system before removing. Failure to do so could damage the equipment.

---

**CAUTION:**

---

Use a twisting motion rather than a prying motion. Prying will be ineffective and can cause damage to your PC board or BGA socket.


---

**CAUTION:**

---

This tool is not designed for removing high insertion force units. Attempting to do so will result in damage to the tool or the high insertion force components.

1. Start at a corner of the socket and lift a small amount.
2. Move down the row of pins and lift some more.
3. Proceed around three or four sides, as possible, until the analysis probe is free.

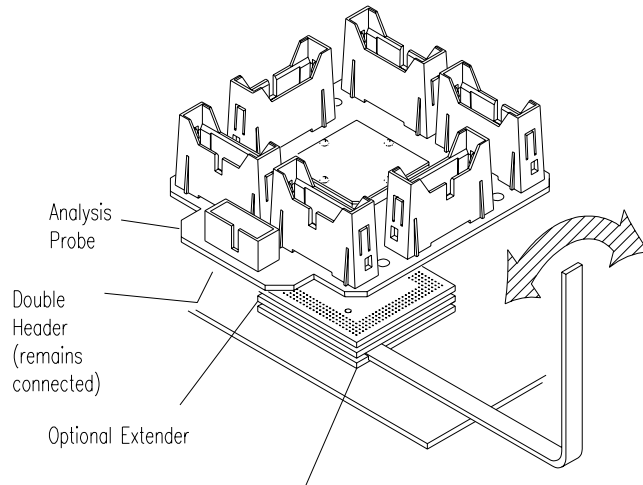

BGA Socket on Target

e2476e68



Agilent Part Number E8125-92000

Printed November, 1999