



VHF AND UHF TRANSCEIVERS

IC-F110S IC-F210S



- Simple Operation with Large Buttons and Volume Knob
- 4 Watts (typ.) Front-mounted Speaker
- 8 Memory Channels with LED Display
- User Programmable LED lighting and Various Hanger Actions
- Built-in 5-tone, 2-tone, CTCSS, DTCS Encoder & Decoder
- Advanced Multi 5-tone/2-tone Systems (See overleaf for details)
- Standard DTMF Encoder and Optional DTMF Decoder with ANI Function
- Programmable Wide/Narrow Channel Spacing for Each Channel
- Optional Voice Scrambler, UT-109/UT-110
- MIL-STD 810 C, D, E and F Specification Rugged Construction



Icom Inc.

ADDITIONAL FEATURES

Advanced Multi 5-tone/2-tone systems

- Programmable actions when a matched tone is received
 - LED lighting ON/OFF/Blink
 - Answer back calls
 - Beep sounds
 - Scan Start/Stop
 - Auto transmission
 - Stun/Kill functions (prevents use of a lost or stolen radio)
 - External out for horn drive (Optional OPC-617 is required)
- Eight 5-tone codes or ten 2-tone codes can be decoded on a channel
- Three Call codes are programmable

Other features

- Hook scan function and Hook scan ON/OFF button are assignable
- 24-digit DTMF autodial memory
- Automatic ID (DTMF code) transmission linked to PTT
- Busy lockout and repeater lockout
- Power on password
- Reduced length (117.5mm) allows for easier installation
- External I/O terminal socket with optional OPC-617

SPECIFICATIONS

GENERAL

- Frequency coverage :
 - IC-F110S 136–174MHz
 - IC-F210S 400–430MHz
 - 440–490MHz
- Number of channels : 8 (4 channels × 2 banks)
- Channel Spacing : 12.5/25kHz, 12.5/20kHz
- PLL channel step : 2.5, 3, 125kHz (VHF)
- 5, 6.25kHz (UHF)
- Frequency stability : ±1.5kHz
- Operating temp. range : -25°C to +55°C
- Power supply voltage : 13.2V DC
- Current drain :
 - Tx at 25W 7A
 - Rx Max. audio 1200mA
 - Stand-by 300mA
- Antenna impedance : 50Ω (SO-239)
- Dimensions : 150(W)×40(H)×117.5(D) mm
- Weight : 800g

TRANSMITTER

- Output power : 25W (at 13.2V DC)
- Max. frequency deviation : ±5.0kHz (wide)
- ±4.0kHz (middle)
- ±2.5kHz (narrow)
- Spurious emissions : 0.25μW (below 1GHz)
- Adjacent channel power : 70dB (wide, middle)
- 60dB (narrow)
- Mic. impedance : 600Ω (8-pin modular)

RECEIVER

- Sensitivity : -4dBμV typ. (emf) (at 20dB SINAD)
- Squelch sensitivity : -4dBμV typ. (emf, threshold)
- Adjacent channel selectivity : 75dB typ. (wide, middle)
- 65dB typ. (narrow)
- Spurious response : 75dB
- Intermodulation : 67dB typ.
- Audio output power : 4.0W typ. at 10% dist./4Ω load
- Ext. SP connector : 2-conductor 3.5(d)mm/4Ω

Applicable U.S. Military Specifications

The IC-F110S/F210S meets MIL-STD requirements and strict environmental standards as follows.

Standard	MIL 810 C		MIL 810 D		MIL 810 E		MIL 810 F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
Low Pressure	500.1	I	500.2	I, II	500.3	I, II	500.4	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4-3	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation	505.1	I	505.2	I	505.3	I	505.4	I
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	-
Dust	510.1	I	510.2	I	510.3	I	510.4	I
Vibration	514.2	VIII, X	514.3	I, IV	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV


Supplied Accessories

- Hand mic. (HM-100N)
- DC power cable
- Mounting bracket kit
- Hanger kit
- Key assign stickers

Measurements made in accordance with ETS 300 086. All stated specifications are subject to change without notice or obligation.

OPTIONS

- **HM-100TN** DTMF MICROPHONE
- **OPC-617** ACC CABLE
For external terminal connection.
- **SM-25** DESKTOP MICROPHONE
Equipped with monitor switch.
- **SP-5/SP-10/SP-22** EXTERNAL SPEAKERS
Compact and easy-to-install.
Input impedance: 4Ω; Max. input power: 5W
- **UT-108** DTMF DECODER UNIT
Provides DTMF decode and ANI capabilities.
- **UT-109** VOICE SCRAMBLER UNIT (Version 02)
- **UT-110** VOICE SCRAMBLER UNIT (Version 02)
The scrambler systems of the UT-109 and UT-110 are not compatible with each other. Ask your dealer for details.
UT-109: Non-rolling type. UT-110: Rolling type.

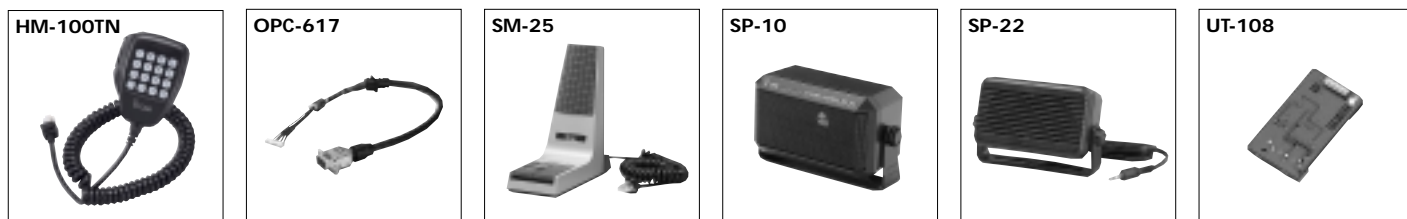

Icom Inc. 1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html> **Count on us!**

Icom America Inc.
<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: +1 (425) 454-8155 Fax: +1 (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone : (425) 454-7619

Icom (Europe) GmbH
Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: +49 (0211) 346047 Fax: +49 (0211) 333639
URL : <http://www.icomeurope.com>

Asia Icom Inc.
6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899 Fax: +886 (02) 2559 1874
URL : <http://www.asia-icom.com>

Your local distributor/dealer:

Icom Canada
Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266 Fax: +1 (604) 952-0090
URL : <http://www.icomcanada.com>

Icom Spain S.L.
Ctra. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: +34 (93) 590 26 70 Fax: +34 (93) 589 04 46
URL : <http://www.icomspain.com>

Beijing Icom Ltd.
1305, Wanshang Plaza, Shijingshan Road, Beijing, China
Phone: +86 (010) 6866 6337 Fax: +86 (010) 6866 3553
URL : <http://www.bjicom.com>

Icom (Australia) Pty. Ltd.
A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: +61 (03) 9387 0666 Fax: +61 (03) 9387 0022
URL : <http://www.icom.net.au>

Icom (UK) Ltd.
Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: +44 (01227) 741741 Fax: +44 (01227) 741742
URL : <http://www.icomuk.co.uk>



Certificate Number Q14190
Icom Inc. (Japan), is an ISO9001 certification acquired company.

Icom New Zealand
146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: +64 (09) 274 4062 Fax: +64 (09) 274 4708
URL : <http://www.icom.co.nz>

Icom France S.a
Zac de la Plaine, 1, Rue Brindejonec des Moulains
BP 5804, 31505 Toulouse Cedex, France
Phone: +33 (5) 61 36 03 03 Fax: +33 (5) 61 36 03 00
URL : <http://www.icom-france.com>