


7017




- DC to 800MHz, 50Ω, signal switching
- <10mΩ contact resistance variation

Ordering Information

7017 Dual 1x4, 800MHz, 50Ω Multiplexer with SMA Connectors

7018-C 7018-S

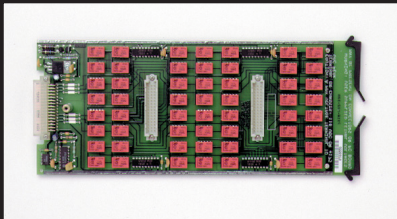

- Dual 1x14 (28-channel) multiplexer for 3- or 6-pole operation
- Connects to 7001/7002 backplane for easy expandability

Ordering Information

7018-C Quad 1x10 Multiplexer with 96-Pin Mass Terminated Connector Board

7018-S Dual 1x14 Multiplexer with Screw Terminal Connector Board

1.888.KEITHLEY (U.S. only)

www.keithley.com

800MHz RF Switch Card

Dual 1x4 Configuration, 50Ω

The Model 7017 800MHz Multiplexer Card combines the stability, durability, and bandwidth that high-volume production testing applications demand. Its reed relay design ensures extremely repeatable contact resistance, even when operating at high speeds continuously. With an 800MHz bandwidth, the 7017 is suitable for switching a wide range of signals, making it a good choice for testing a variety of electronic components and assemblies, from diodes and capacitors to disk drive heads and other electronic subassemblies.

MULTIPLEXERS PER CARD: 2 (with isolated ground).
CHARACTERISTIC IMPEDANCE: 50Ω nominal.
CHANNELS PER MULTIPLEXER: 4.
CONTACT CONFIGURATION: 1 pole Form A, common shield.
RELAY DRIVE CURRENT: 26mA per channel.
CONNECTOR TYPE: SMA.
RECOMMENDED CABLE: RG-223/U.
ACTUATION TIME: 1ms.
MAXIMUM VOLTAGE: Any terminal (center or shield) to any other terminal or chassis: 42V peak.

MAXIMUM CURRENT: 1A carry/0.5A switched.
MAXIMUM POWER: 10VA.
ISOLATION: Multiplexer to Multiplexer: >10°Ω. **Center to Shield:** >10°Ω, <60pF. **Channel to Channel:** >10°Ω.
CONTACT POTENTIAL: <25μV
CONTACT RESISTANCE: <0.5Ω initial, 1Ω at end of contact life.
CONTACT LIFE: 1V 10mA: 10⁸ closures. 20V 0.5A: 5×10⁴ closures.
AC PERFORMANCE:

	≤10 MHz	≤100 MHz	≤500 MHz	≤800 MHz
For Z _L = Z _S = 50Ω				
Insertion Loss (dB):	<0.35	<1.0	<2.0	<3.0
Crosstalk (dB)¹				
Channel-Channel	<-60	<-40	<-35	<-30
Mux. to Mux.	<-80	<-60	<-60	<-55

VSWR: <1.2 @ 100MHz.
¹Specification assumes 50Ω termination.
EMC: Conforms to European Union Directive 89/336/EEC.
SAFETY: Conforms to European Union Directive 73/23/EEC (meets EN61010-1/IEC 1010).
ENVIRONMENT: Operating: 0° to 50°C, up to 35°C at <80% R.H. **Storage:** -25°C to 65°C.

28-Channel 3-Pole Multiplexer

The Model 7018 28-channel multiplexer has two independent banks of 1x14 switching. Each channel is 3-pole. The two banks can be combined for a variety of different switching configurations. Used separately, they provide a dual 1x14 3-pole configuration. Onboard jumpers can connect the outputs together for a single 1x28 3-pole arrangement. Both the 7001 and 7002 switch systems can use the two banks in parallel for 6-pole operation in a 1x14 configuration.

MULTIPLEX CONFIGURATION: 2 independent 1x14 3-pole multiplex banks or one 1x14 6-pole multiplexer. Jumpers can be removed to isolate any bank from the backplane.
CONTACT CONFIGURATION: 3-pole Form A.
CONNECTOR TYPE: 7018-C: 96-pin male DIN connector.
 7018-S: Screw terminal, #16AWG maximum wire size, with 0.092 inch O.D. 28 conductors per card maximum. #22AWG typical wire size with 0.062 inch O.D. 90 conductors per card maximum.
MAXIMUM SIGNAL LEVEL: DC Signals: 110V DC between any two pins, 1A switched, 30VA (resistive load).
AC Signals: 125V rms or 175V AC peak, between any two pins, 1A switched, 60VA (resistive load).
COMMON MODE VOLTAGE: 175V peak, any pin to chassis.
CONTACT LIFE: Cold Switching: 10⁸ closures.
 At Maximum Signal Levels: 10⁵ closures.
CHANNEL RESISTANCE (per conductor): <1.5Ω.
CONTACT POTENTIAL: <5μV per single contact.

OFFSET CURRENT: <100pA.
ACTUATION TIME: 3ms.
ISOLATION: Bank: >10°Ω, <25pF.
Channel to Channel: >10°Ω, <50 pF.
Differential: Configured as 1x14 >10°Ω, <100pF.
 Configured as 1x28 >10°Ω, <200pF.
Common Mode: Configured as 1x14 >10°Ω, <400pF.
 Configured as 1x28 >10°Ω, <650pF.
CROSS TALK (1MHz, 50Ω Load): Bank: <-40dB.
Channel: <-40dB.
INSERTION LOSS (50Ω Source, 50Ω Load): <0.2dB below 1MHz, <3dB below 2MHz.
RELAY DRIVE CURRENT (per channel): 59mA. (Maximum of 11 channels on at same time.)
EMC: Conforms to European Union Directive 89/336/EEC.
SAFETY: Conforms to European Union Directive 73/23/EEC (meets EN61010-1/IEC 1010).
ENVIRONMENT: Operating: 0°C to 50°C, up to 35°C at 80% RH. **Storage:** -25°C to 65°C.

ACCESSORIES AVAILABLE

FOR 7018-C

7011-KIT-R	96-Pin Female Connector Kit
7011-MTC-1	96-Pin Mass Terminated Cable, Female to Female, 1m
7011-MTC-2	96-Pin Mass Terminated Cable, Female to Female, 2m
7011-MTR	96-Pin Male Connector Kit

FOR 7018-S

7018-ST	Extra Screw Terminal Connection Board
---------	---------------------------------------

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Use with 7001 and 7002 Switch Mainframes

SWITCHING & CONTROL