

Precision PLL Waveform Synthesizer

- ◆ **Phase Locks to External Analog Signals: 500 Hz to 10 MHz, 100 mV to 30 Vrms**
- ◆ **Sine and Square Waves up to 50 MHz at Amplitudes up to 16 Vpk-pk into 50 Ω**
- ◆ **Built-in Functions: Triangle^(x), Sine^(x), Sinc, Square, Ramp, Pulse, DC, Exponential & Gaussian Pulse**
- ◆ **New Linear/Log Sweep Feature Outputs Sine/Square/Triangle to 10 MHz**
- ◆ **High-Performance Frequency Synthesis: 7-Digit Resolution and Accuracy to 1 ppm**
- ◆ **VXI Replacement for Legacy Pulse and Function Generators**

Racal Instruments™ 3152A Waveform Synthesizer combines 100 MS/s performance, versatility, and compact size in a single-slot VXIbus format. The 3152A is a field-proven instrument ideal for VXI test stimulus generation and is standard on many military and commercial test platforms.

Multifunctional Performance

The 3152A provides a synergistic combination of a swept function generator, pulse generator, programmable sequencer, and arbitrary waveform synthesizer in one instrument.

In addition, the 3152A integrates a phase lock loop, phase modulation, and a frequency counter into a single-slot module saving valuable space.

New Sweep Mode

Users test frequency response using the 3152A's new sweep mode. The 3152A sweeps sine, square or triangle waveforms from any two frequencies up to 10 MHz. Sweep may be performed either up or down and linearly or logarithmically.

Enhanced Throughput

New high-speed commands, binary download modes, and a faster internal CPU allow the 3152A to run your test sequences faster than ever before.

Tektronix VX4750 Emulation

As an option, the 3152A can accept native commands of the obsolete VX4750 Generator to ease its replacement in legacy test systems. See the 3152A cross-reference guide on our website for compatibility information with the VX4750 and other obsolete VXI generators.

7-Digit Frequency Resolution

The 3152A's DDS (Direct Digital Synthesis) frequency synthesizer provides the high signal-noise ratio (70 dB, typical) and low phase-noise and jitter needed for telecommunications test applications.

Modulation

The 3152A is the first VXIbus module to incorporate external analog Phase Modulation (PM) and Phase Locking to external analog waveforms into a single instrument. The PM feature is useful in real-time phase offset control and telecom applications. The phase lock feature automatically locks the 3152A's output to external signals at frequencies up to 10 MHz and voltages up to 30 Vrms. Phase offset is programmable with 0.01° resolution, and the trigger threshold is programmable with 10 mV resolution.

Sequences of up to 4096 Waveforms

Powerful sequencing capability allows the linkage of up to 4096 waveform segments and/or bursts (repeated segments). A segment can be repeated up to 1 million times in burst mode. Sequenced functions run continuously or when initiated by a trigger. The sequencing features permit the creation of complex pulse patterns using minimal amounts of memory.

AMPLITUDE CHARACTERISTICS

Amplitude

20 mV – 32 Vpk-pk, output open circuit
10 mV – 16 Vpk-pk, into 50 Ω

Resolution

3.5 digits

Accuracy (at 1 kHz and specified output)

±1% of setting

Amplitude Ranges

R1: 10.00 mV-160.0 mV
R2: 160.1 mV-1.600 V
R3: 1.601 V-16.00 V

Accuracy (at 1 kHz)

±1% of setting

DC Offset Range

0 to ± 7.19 V

DC Offset Accuracy

R1: ±(1% Vampl. +1% Vofs. +0.2 mV)
R2: ±(1% Vampl. +1% Vofs. +2 mV)
R3: ±(1% Vampl. +1% Vofs. +20 mV)

Waveform Dynamic Range

Vampl. + Vofs. ≤max. of selected amplitude range: 12bits
Vampl. + Vofs. > max. of selected amplitude range: <12 bits
(derates as Vofs. is increased)

Built-In Frequency Counter

The 3152A's PLL function adds 4-digit frequency read back for any external signal up to 30 Vrms in amplitude and 10 MHz in frequency. This makes the 3152A usable for general-purpose frequency counter applications.

100 MegaSamples/Second Sample Rate

A high sample rate of 100 MS/s makes the 3152A an ideal modulation source for troubleshooting new encoding schemes that use increasingly narrow channel widths. The 3152A also can provide high-speed waveforms to simulate signal distortion, power line cycle dropouts, component failures, and power supply transients.

Flexible Triggering Capability

Combining VXIbus trigger lines with the 3152A's sync capability transforms the 3152A into an Arbitrary Trigger Generator. In addition to continuous output, the 3152A can also wait for a trigger to initiate either a single waveform, a burst of waveforms, or a sequence of waveforms.

Triggers can also be used to advance a sequence of waveforms one segment at a time. The 3152A can trigger immediately, or delay up to 2 million wave points. Precise trigger level control is provided to ±10 V, with 10 mV accuracy.

Arbitrary Waveform Creation

The 3152A, in combination with WaveCAD™ 3.4 software, allows sophisticated waveform generation for many test applications.

VXIplug&play Drivers

VXIplug&play drivers for Windows 95/98/ME/NT/2000/XP simplify test system design and integration. The 3152A supports both LabWindows/CVI and LabVIEW. These drivers provide precise control of the device. A soft front panel is also included for "hands-on" access to 3152A features.

3152A SPECIFICATIONS

Low-Pass Filters

20 MHz, 7-pole, Gaussian
25 MHz, 7-pole, elliptic
50 MHz, 7-pole, elliptic

Standby (Output disconnected)

Output On or Off

Output Protection

Short circuit

Glitch Energy

1 nV-s at 16 Vpk-pk

STANDARD WAVEFORMS

(Sine^x, Triangle^x, Square, Pulse, Ramp, Sinc, Gaussian Pulse, Exponential Decay Pulse, Exponential Rise Pulse, DC.)

Frequency Resolution

7 digits

Accuracy

±.01% of setting

Stability

1 ppm

Sine^x Function

(Sine function raised to the xth power)

Frequency Range

100 μHz to 50 MHz

Distortion (4096 points)

< 0.1% below 100 kHz

Harmonics

Frequency	Amplitude	Harmonic Level
<5 MHz	10 Vpk-pk	-48 dBc
<5 MHz	16 Vpk-pk	-40 dBc
<10 MHz	10 Vpk-pk	-40 dBc
<10 MHz	16 Vpk-pk	-35 dBc
<50 MHz	10 Vpk-pk	-28 dBc
<50 MHz	16 Vpk-pk	-20 dBc

Band Flatness

< 1 MHz: 1% (0.09 dB)
< 10 MHz: 5% (0.42 dB)
< 50 MHz: 15% (1.2 dB)

Phase Range

0 - 360°

Exponent Range

Sine¹ - Sine⁹

Triangle^x Function

(Triangle function raised to the xth power)

Frequency Range

100 μHz to 1 MHz, usable to 10 MHz

Phase Range

0 - 360°

Exponent Range

1 to 9

Square Wave Function

Frequency Range

100 μ Hz to 50 MHz

Duty Cycle Range

1% - 99%

Rise/Fall Time

7 ns

Aberration

5%

Pulse and Ramp Functions

Frequency Range

100 μ Hz to 1 MHz

Delay, Rise Time, High Time, and Fall Time Ranges

0% to 99.9% of period each (independently)

Pulse Rise and Fall Time

(10% to 90% of FS)

7 ns

Aberration

5%

Sinc Function (Sine(x) x)

Frequency Range

100 μ Hz to 1 MHz

Range of Cycles

4 to 100

Gaussian Pulse Function

Frequency Range

100 μ Hz to 1 MHz

Exponent

1 to 200

Exponential Pulse Function

(Pulses with exponential rise or delay times)

Frequency Range

100 μ Hz to 1 MHz

Exponent Range

-200 to 200

DC Output Function

Amplitude Range

0% to $\pm 100\%$ of max. amplitude

ARBITRARY WAVEFORMS

(Waveform memory may be "segmented" allowing storage of multiple waveforms.)

Custom Waveform Creation Software

WaveCAD software allows creation of custom waveforms, either freehand, using equations, simulation tools, or using waveforms recorded in the real world.

Waveform Memory

512k points

Vertical Resolution

12 bits (4096 levels)

Number of Memory Segments

1 to 4096

Minimum Segment Size

10 points

SEQUENCED WAVEFORMS

(Waveform segments may be repeated or "looped." Waveform loops may be linked and sequenced.)

Sequencer Step Limits

4096

Segment Loops

0 to 1 Meg

Segment Duration

100 ns minimum, > 1 loop

Fast Sequence Download

100 Steps < 250 ms

SWEEP WAVEFORMS

Sweep Range

100 μ Hz to 10 MHz

Waveforms

Sine, square, triangle

Spacing

Linear, logarithmic

Direction

Up or down

Step Range

10 to 1000

Sweep Duration

0.01 to 1000 s

SAMPLING CLOCK

Internal Source Range

100 mHz to 100 MHz

External Source Range

Up to 100 MHz

VXIbus Backplane Source

ECLTRG0 up to 66 MHz

Internal Reference

Standard: VXIbus CLK10

Optional: 10 MHz TCXO 1 ppm accuracy

OPERATING MODES

(Normal, Sequenced, Triggered, Triggered Sequence Advance, Delay Triggered, Gated, Burst, Amplitude Modulated)

Normal Mode

Continuous output of a single waveform segment

Sequenced Mode

Continuous output of a sequence of waveform segments

Sweep Mode

Continuous output of a swept waveform

Triggered Mode

One waveform cycle or sequence or Sweep is output

Triggered Sequence Advance Mode

Sequence or sweep is advanced to the next step each time a trigger is received

Delayed Triggered Mode

Delays any trigger by up to 2 million waveform points

Gated Mode

Generator is enabled when an external gate signal is active. The first gated output cycle is synchronous with the active slope of the gate signal. The last output cycle is always completed.

Burst Mode

A segment is repeated up to 1 million times. In External Burst Mode, each burst begins with a trigger. In Internal Burst Mode, an internal timer is used to repeat the burst at a programmed interval.

Phase Lock Mode

Phase locks a standard or arbitrary waveform to an external signal to 30 Vrms.

Phase Modulation (external)

PM Modulation Rate: 0 to 10 kHz

Amplitude Modulation (internal)

AM Modulation Rate: 10 Hz to 500 Hz

AM Depth: 1% to 200%

TRIGGERING CHARACTERISTICS

Sources

Internal: 1 mHz – 66 kHz timer

External: 10 k Ω , 100 mV to 30 Vrms

Level (Programmable): ± 10 V

Resolution: 10 mV

Sensitivity: \pm (5% of level + 150 mV)

VXI Backplane: TTLTRG0-7

Maximum Trigger Frequency

Internal Timer: 66 kHz

External: 5 MHz

Minimum External Trigger Pulse Width

20 ns

Trigger Slope

Positive or negative

Trigger Delay

0 to 2 Meg points (sample clocks)

System Delay (Trig I/P to Waveform O/P)

Standard Waveforms: 120 ns +2 clock periods \pm 1 clock period

Arbitrary Waveforms: 150 ns +2 clock periods \pm 1 clock period

Sync Output

Front Panel: TTL

VXI Backplane: TTLTRG0-7

Sync Sources

Any point, sequence complete, 1/2 clock period

3152A PRODUCT SPECIFICATIONS


PLL CHARACTERISTICS

Operation

Automatically locks to external signal

PLL Input Characteristics

Same as TRIG IN

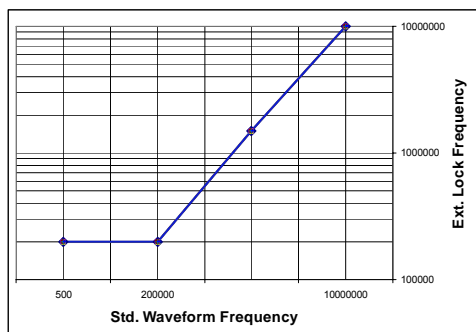

External Lock Frequency Range

Standard Waveforms: see curve above
Arbitrary Waveforms: 500 Hz to 100 MHz divided by number of waveform samples

Coarse Phase Offset Range

$\pm 180^\circ$

Resolution

Standard Waveforms: 0.72° , frequency settings from 500 Hz to 200 kHz; $360^\circ \times \text{frequency (in MHz)} / 100$,
freq. settings from 200 kHz to 10 MHz
Arbitrary Waveforms: $360^\circ / \text{number of waveform samples}$

Accuracy

$5.4 \times \text{frequency (in MHz)} + \text{resol.}/2$

Fine Phase Offset Control Range

$\pm 36^\circ$ around coarse phase offset setting

Resolution

0.01°

Accuracy

10%, typical

FREQUENCY COUNTER

Operation

Made available to the user in PLL mode only. Frequency reading is valid only when PLL ON LED is lit.

Range

Same as External Lock Frequency
Range above

Resolution

4 digits

PM CHARACTERISTICS

Operation


External signal offsets phase. The PM input is operational in PLL mode.

PM Input

Impedance: 100 k Ω , $\pm 5\%$

Sensitivity: 20 mV, typical

Accuracy: $\pm 30\%$

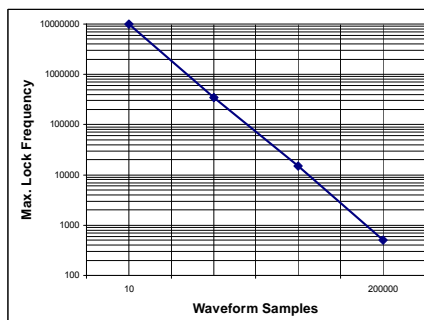

MULTIPLE-MODULE SYNCHRONIZATION

(Multiple modules may be placed in any chassis slots with no cumulative error.)

Phase Accuracy

$\pm (20 \text{ ns} \times f_{\text{out}} \times 360^\circ + \text{P.O.R.})$

Phase Offset Resolution (P.O.R.)

$360^\circ / (\text{Number of points})$

Phase Offset Range

0° to $360^\circ - 2880^\circ/n$

(Where n is the number of points in the selected memory segment.)

Synchronization Source

ECLTRG0-1

Sample Clock Rate

Up to 66 MS/s

FRONT PANEL I/O

(Accessed with BNC connectors)

Inputs

Trigger/Gate: $Z_{\text{in}} = 1 \text{ k}\Omega$, TTL voltage level

External Sample Clock: TTL voltage level

Phase Modulation Input: 100 k Ω , 30 Vrms

Outputs

Waveform: $Z_{\text{out}} = 50 \Omega$

Marker/Sync: $Z_{\text{out}} = 50 \Omega$, TTL

VXIBUS INTERFACE DATA

(Single-slot, message based, VXibus 1.4 compliant)

Software

SCPI, IEEE 488.2

Drivers

LabVIEW, LabWINDOWS/CVI, VXIplug&play

Shared Waveform Memory

A24/A32 VME block transfer

Backplane Signal Support

TTLTRG0-7: Trigger In, Sync Out

ECLTRG0-1: Sample Clock Source,

Module Synchronization

Status Lights

Red: Power-On Self-Test Failure

Yellow: Module accessed on

VXibus

Green: Output on/off

Cooling (10 $^\circ\text{C}$ Rise)

3.7l/s @ 0.55 mmH₂O

Peak Current & Power Consumption

	+24	+12	+5	-5.2	-12	-24
I_{pm} (A)	.25	.10	3.0	2.0	.10	.25
I_{dm} (A)	.25	.10	.15	.15	.10	.15

Total Power: 40 Watts

ENVIRONMENTAL

Temperature

Operating: 0°C - 55°C

Specification Compliance: 20° to 30°C for specified data, 30 min. warm-up, 50 Ω load

Storage: -40°C to $+70^\circ\text{C}$

Humidity (non-condensing)

11°C - 30°C , 95% $\pm 5\%$

31°C - 40°C , 75% $\pm 5\%$

41°C - 50°C , 45% $\pm 5\%$

Altitude

Operating: 10,000 ft.

Storage: 15,000 ft.

Vibration (non-operating)

2 g at 55 Hz

Shock (non-operating)

30 g, 11 ms, 1/2 sine wave

Weight

3 lb. 8 oz. (1.6 kg)

EMC (Council Directive 89/336/EEC)

EN55011, Group 1, Class A

EN 50082-1, IEC 801-2,3,4

Safety (Low Voltage Directive 73/23/EEC)

EN 61010-1, IEC1010-1, UL3111-1, CSA 22.2 #1010

3152A ORDERING INFORMATION

3152 to 3152A Cross-Reference Guide			
Original Configuration		New 3152A Configuration	
Model 3152	Part Number	Model 3152A	Part Number
3152	407510-001	3152A	407808-001
3152 w/256 k	407510-002	3152A w/512 k	407808-003
3152 w/512 k	407510-003	3152A w/512 k	407808-003
3152 w/64 k, 1ppm	407510-011	3152A, 1 ppm	407808-011
3152 w/256 k, 1ppm	407510-012	3152A 2/512 k, 1 ppm	407808-013
3152 2/512 k, 1ppm	407510-013	3152A w/512 k, 1 ppm	407808-013
3152-S-1619	407510-001S1619	3152A	407808-001
3152-S-1619A	407510-013A1619A	3152A w/512 k, 1 ppm	407808-013
3152-S-1755 (Germany STN)	407510-003S1755	3152A 2/512 k	407808-003S1755
VX4750 (Tektronix)		3152A 2/512 k, 1ppm, TEK	407808-213
Note: All 3152 (407510-xxx) models are obsolete. Use the appropriate 3152A configuration as a direct replacement.			

ORDERING INFORMATION

MODEL/DESCRIPTION

Racal Instruments 3152A/512 k, 100 MS/s Waveform Generator, 100 MHz w/512 k RAM
 Racal Instruments 3152A/512 k/1 ppm, 100 MS/s Waveform Generator, 100 MHz w/512 k RAM, 1 ppm
 Racal Instruments 3152A/TEK, 100 MS/s Waveform Generator, 100 MHz w/512 k RAM, Tektronix VX4750 Native Commands

PART NUMBER

407808-003
 407808-013
 407808-203

CE The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions, Immunity to Electromagnetic Disturbances and complies with European electrical safety standards.

The EADS North America Defense Test and Services policy is one of continuous development, consequently the equipment may vary in detail from the description and specification in this publication.



EADS North America Defense Test and Services
 1.800.722.2528/1.949.859.8999 sales@eads-nadefense.com