




Series
TCX

SIZE 22 CRIMP REMOVABLE PIN CONTACT
JN1123 C P 22

Issue:
28 FEB 2002

Page
1 / 1

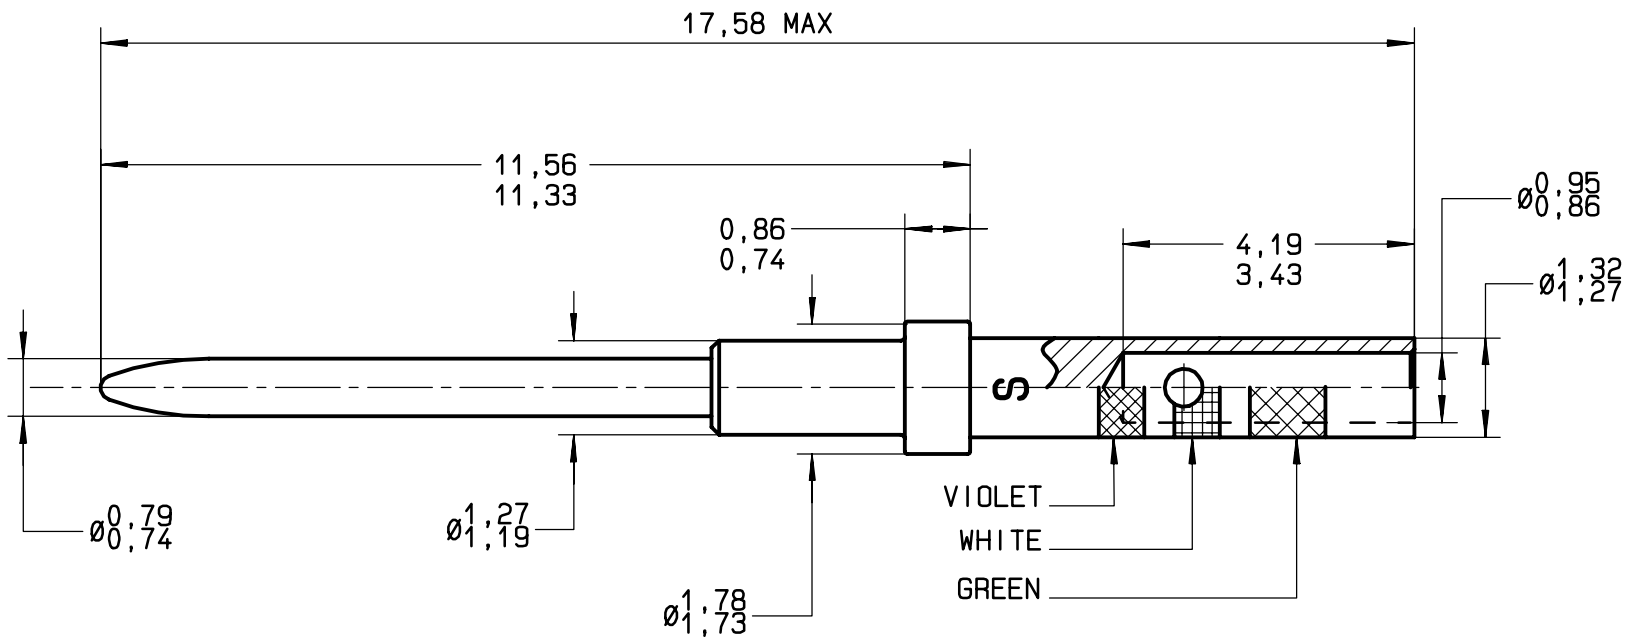

MATERIAL : LEADED NICKEL COPPER (C97)

FINISH : .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D
CLASS 1 OVER NICKEL PER QQ-N-290

WIRES ACCOMODATED : AWG 22-24-26
INSULATEUR DIAMETER : 1,32 MAX - 0,76 MIN
STRIP LENGTH : 3,5

TOOLING :
CRIMPING TOOL : M22520/2-01 RADIALL 282 281
SELECTOR POSITION : 4 FOR AWG 22
3 FOR AWG 24 - 26

POSITIONER : M22520/2-23 RADIALL 282 970
INSERTION AND EXTRACTION TOOL : M81969/1-01 RADIALL 282 885
SPL RADIALL INS. 282 880 / EXT. 282 890

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610

CREATION
PEN: M970106323A
NOM: COUTHON
DATE: 28 FEB 2002
APPR.:
Issue	Revisions		Name	Approved

RADIALL[®]

101, rue Philibert Hoffmann Z.I. Ouest
93116 ROSNY/BOIS Cedex (France)
Tl.: 01 49 35 35 35
Fax.: 01 48 54 63 63
Tlax: RADIA 235220